



# RF TEST REPORT

**Applicant**      Quectel Wireless Solutions Co., Ltd  
**FCC ID**            XMR201910BG95M3  
**Product**          LTE Cat M1 & Cat NB2 & EGPRS Module  
**Brand**             Quectel  
**Model**             BG95-M3  
**Report No.**       R2003A0152-R7  
**Issue Date**       May 8, 2020

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 2 (2019)/ FCC CFR 47 Part 22H (2019)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

*Performed by: Peng Tao*

*Approved by: Kai Xu*

## TA Technology (Shanghai) Co., Ltd.

*No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China*

*TEL: +86-021-50791141/2/3*

*FAX: +86-021-50791141/2/3-8000*



## TABLE OF CONTENT

1. Test Laboratory .....	4
1.1. Notes of the Test Report .....	4
1.2. Test facility .....	4
1.3. Testing Location .....	4
2. General Description of Equipment under Test .....	5
3. Applied Standards .....	6
4. Test Configuration .....	7
5. Test Case Results .....	8
5.1. RF Power Output .....	8
5.2. Effective Radiated Power .....	10
5.3. Occupied Bandwidth .....	13
5.4. Band Edge Compliance .....	17
5.5. Peak-to-Average Power Ratio (PAPR) .....	25
5.6. Frequency Stability .....	27
5.7. Spurious Emissions at Antenna Terminals .....	30
5.8. Radiates Spurious Emission .....	36
6. Main Test Instruments .....	41

### Summary of measurement results

No.	Test Case	Clause in FCC rules	Verdict
1	RF power output	2.1046	PASS
2	Effective Radiated Power	22.913(a)(5)	PASS
3	Occupied Bandwidth	2.1049	PASS
4	Band Edge Compliance	2.1051 / 22.917(a)	PASS
5	Peak-to-Average Power Ratio	22.913(d)/ KDB 971168 D01(5.7)	PASS
6	Frequency Stability	2.1055 / 22.355	PASS
7	Spurious Emissions at Antenna Terminals	2.1051 / 22.917(a)	PASS
8	Radiates Spurious Emission	2.1053 / 22.917 (a)	PASS
Date of Testing: August 20, 2019 ~ September 11, 2019			
Note: All indications of Pass/Fail in this report are opinions expressed by TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.			

**There is no test for BG95-M3 in this report(Report No.:R2003A0152-R7).All test values duplicated from the BG95-M3 report (Report No. : R1907A0446-R7). The detailed product change description please refers to the *Statement letter*.**



## 1. Test Laboratory

### 1.1. Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein .Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

### 1.2. Test facility

#### **FCC (Designation number: CN1179, Test Firm Registration Number: 446626)**

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

#### **A2LA (Certificate Number: 3857.01)**

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

### 1.3. Testing Location

Company: TA Technology (Shanghai) Co., Ltd.  
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong  
City: Shanghai  
Post code: 201201  
Country: P. R. China  
Contact: Xu Kai  
Telephone: +86-021-50791141/2/3  
Fax: +86-021-50791141/2/3-8000  
Website: <http://www.ta-shanghai.com>  
E-mail: [xukai@ta-shanghai.com](mailto:xukai@ta-shanghai.com)

## 2. General Description of Equipment under Test

### Client Information

Applicant	Quectel Wireless Solutions Co., Ltd
Applicant address	Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, China 200233
Manufacturer	Quectel Wireless Solutions Co., Ltd
Manufacturer address	Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, China 200233

### General Information

EUT Description			
Model	BG95-M3		
IMEI	864475040001736		
Hardware Version	R2.1		
Software Version	BG95MR3LAR02A03		
Power Supply	External power supply		
Antenna Type	The EUT don't have standard Antenna, The Antenna used for testing in this report is the after-market accessory (Dipole Antenna)		
Antenna Gain	LTE Band 26: 3dBi		
Test Mode(s)	LTE Band 26;		
Test Modulation	QPSK 16QAM;		
LTE Category	M1		
Maximum E.R.P.	LTE Band 26:	21.36dBm	
Rated Power Supply Voltage	3.8V		
Extreme Voltage	Minimum: 3.3V     Maximum: 4.3V		
Extreme Temperature	Lowest: -40°C     Highest: +85°C		
Frequency Range(s)	Band	Tx (MHz)	Rx (MHz)
	LTE Band 26	824 ~ 849	869 ~ 894
Note: 1. The EUT is sent from the applicant to TA and the information of the EUT is declared by the applicant.			



### 3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**Test standards:**

**FCC CFR 47 Part 22H (2019)**

**ANSI C63.26 (2015)**

**Reference standard:**

**FCC CFR47 Part 2 (2019)**

**KDB 971168 D01 Power Meas License Digital Systems v03r01**

## 4. Test Configuration

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes. EUT stand-up position (Z axis), lie-down position (X, Y axis). Receiver antenna polarization (horizontal and vertical), the worst emission was found in position (X axis, horizontal polarization) and the worst case was recorded.

All mode and data rates and positions were investigated. Subsequently, only the worst case emissions are reported.

The following testing in LTE is set based on the maximum RF Output Power.

Test modes are chosen as the worst case configuration below for LTE Band 26.

Test items	Bandwidth (MHz)					Modulation		RB			Test Channel		
	1.4	3	5	10	15	QPSK	16QAM	1	50%	100%	L	M	H
RF power output	O	O	O	O	O	O	O	O	O	O	O	O	O
Effective Isotropic Radiated power	O	O	O	O	O	O	O	O	O	O	O	O	O
Occupied Bandwidth	O	O	O	O	O	O	O	-	-	O	-	O	-
Band Edge Compliance	O	O	O	O	O	O	O	O	-	O	O	-	O
Peak-to-Average Power Ratio	O	O	O	O	O	O	O	-	-	O	-	O	-
Frequency Stability	O	O	O	O	O	O	O	O	O	O	O	O	O
Spurious Emissions at Antenna Terminals	O	O	O	O	O	O	-	O	-	-	O	O	O
Radiates Spurious Emission	O	-	O	-	O	O	-	O	-	-	-	O	-
Note	1. The mark "O" means that this configuration is chosen for testing. 2. The mark "-" means that this configuration is not testing.												

## 5. Test Case Results

### 5.1. RF Power Output


#### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

#### Methods of Measurement

During the process of the testing, The EUT is controlled by the Base Station Simulator to ensure max power transmission and proper modulation.

#### Test Setup

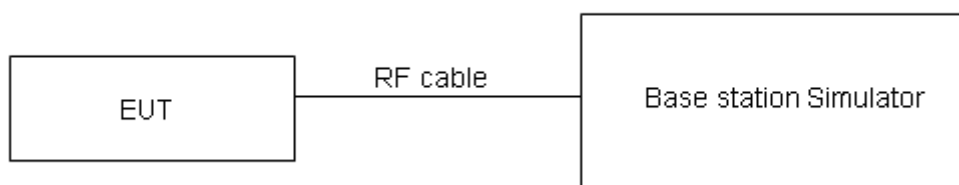

The loss between RF output port of the EUT and the input port of the tester has been taken into consideration.

#### Limits

No specific RF power output requirements in part 2.1046.

#### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 0.4$  dB.





## Test Results

Band26	Channel/ Frequency(MHz)	Index	RB# RB start	Conducted Power (dBm)	
				QPSK	16QAM
1.4MHz	26797/824.7	0	1#0	19.93	20.01
		0	6#0	18.68	18.41
	26915/836.5	0	1#0	20.49	19.10
		0	6#0	18.42	19.03
	27033/848.3	0	1#5	20.31	19.34
		0	6#0	18.51	19.27
3MHz	26805/825.5	0	1#0	20.33	19.36
		0	6#0	18.48	19.01
	26915/836.5	0	1#0	20.16	19.29
		0	6#0	18.40	18.81
	27025/847.5	1	1#5	19.98	19.87
		1	6#0	18.60	18.95
5MHz	26815/826.5	3	1#0	20.20	20.41
		0	6#0	19.78	19.91
	26915/836.5	0	1#0	19.97	20.19
		0	6#0	19.54	19.76
	27015/846.5	0	1#5	20.19	19.51
		3	6#0	19.69	19.70
10MHz	26840/829	3	1#0	20.35	19.58
		0	4#0	20.27	20.51
	26915/836.5	0	1#0	20.27	19.51
		0	4#0	19.54	20.45
	26990/844	4	1#5	20.23	19.46
		7	4#2	20.15	20.33
15MHz	26865/831.5	3	1#0	20.16	20.33
		0	6#0	20.18	20.37
	26915/836.5	0	1#0	20.32	19.64
		0	6#0	20.16	20.28
	26965/841.5	8	1#5	20.16	19.71
		11	6#0	20.06	20.18

## 5.2. Effective Radiated Power

### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa


### Methods of Measurement

The testing follows FCC KDB 971168 v03r01 Section 5.8 and ANSI C63.26 (2015).

- Connect the equipment as illustrated. Mount the equipment with the manufacturer specified antenna in a vertical orientation on a manufacturer specified mounting surface located on a non-conducting rotating platform of a RF anechoic chamber (preferred) or a standard radiation site.
- Key the transmitter, then rotate the EUT 360° azimuthally and record spectrum analyzer power level (LVL) measurements at angular increments that are sufficiently small to permit resolution of all peaks. If a standard radiation test site is used, raise and lower the test antenna to obtain a maximum reading at each angular increment. (Note: several batteries may be needed to offset the effect of battery voltage droop, which should not exceed 5% of the manufactured specified battery voltage during transmission).
- Replace the transmitter under test with a vertically polarized half-wave dipole (or an antenna whose gain is known relative to an ideal half-wave dipole). The center of the antenna should be at the same location as the center of the antenna under test.
- Connect the antenna to a signal generator with a known output power and record the path loss (in dB) as LOSS. If a standard radiation test site is used, raise and lower the test antenna to obtain a maximum reading.  $LOSS = \text{Generator Output Power (dBm)} - \text{Analyzer reading (dBm)}$
- Determine the effective radiated output power at each angular position from the readings in steps b) and d) using the following equation:  $ERP \text{ (dBm)} = LVL \text{ (dBm)} + LOSS \text{ (dB)}$
- The maximum ERP is the maximum value determined in the preceding step.
- When calculating ERP, in addition to knowing the antenna radiation and matching characteristics, it is necessary to know the loss values of all elements (e.g. transmission line attenuation, mismatches, filters, combiners) interposed between the point where transmitter output power is measured, and the point where power is applied to the antenna. ERP can then be calculated as follows:  
 $EIRP \text{ (dBm)} = \text{Output Power (dBm)} - \text{Losses (dB)} + \text{Antenna Gain (dBi)}$   
where: dBd refers to gain relative to an ideal dipole.  
 $EIRP \text{ (dBm)} = ERP \text{ (dBm)} + 2.15 \text{ (dB.)}$

The RB allocation refers to section 5.1, using the maximum output power configuration.

## Test setup

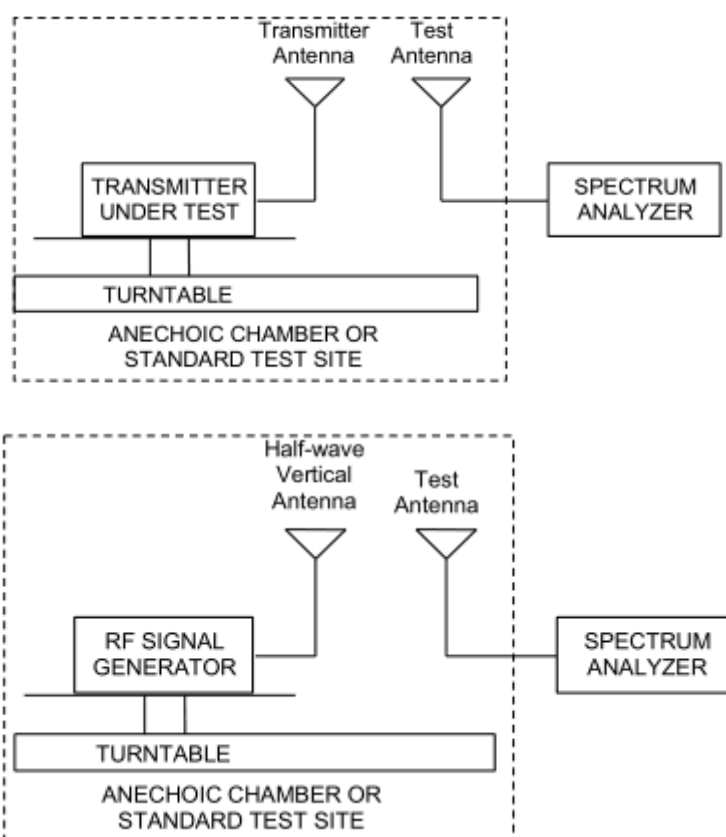

## Limits

Rule Part 22.913(a)(5) specifies that "Mobile/portable stations are limited to 7 watts ERP".

Limit	$\leq 7 \text{ W}$ (38.45 dBm)
-------	--------------------------------

## Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 1.19 \text{ dB}$

**Test Results:**

The measurement is performed for both of horizontal and vertical antenna Polarization, and only the data of worst mode is recorded in this report.

LTE Band 26							
Mode	Channel/ Frequency(MHz)	Index	RB# RBstart	ERP(dBm)		Limit (dBm)	Conclusion
				QPSK	16QAM		
1.4MHz	26797/824.7	0	1#0	20.78	20.86	38.45	Pass
		0	6#0	19.53	19.26	38.45	Pass
	26915/836.5	0	1#0	21.34	19.95	38.45	Pass
		0	6#0	19.27	19.88	38.45	Pass
	27033/848.3	0	1#5	21.16	20.19	38.45	Pass
		0	6#0	19.36	20.12	38.45	Pass
3MHz	26805/825.5	0	1#0	21.18	20.21	38.45	Pass
		0	6#0	19.33	19.86	38.45	Pass
	26915/836.5	0	1#0	21.01	20.14	38.45	Pass
		0	6#0	19.25	19.66	38.45	Pass
	27025/847.5	1	1#5	20.83	20.72	38.45	Pass
		1	6#0	19.45	19.80	38.45	Pass
5MHz	26815/826.5	3	1#0	21.05	21.26	38.45	Pass
		0	6#0	20.63	20.76	38.45	Pass
	26915/836.5	0	1#0	20.82	21.04	38.45	Pass
		0	6#0	20.39	20.61	38.45	Pass
	27015/846.5	0	1#5	21.04	20.36	38.45	Pass
		3	6#0	20.54	20.55	38.45	Pass
10MHz	26840/829	3	1#0	21.20	20.43	38.45	Pass
		0	4#0	21.12	21.36	38.45	Pass
	26915/836.5	0	1#0	21.12	20.36	38.45	Pass
		0	4#0	20.39	21.30	38.45	Pass
	26990/844	4	1#5	21.08	20.31	38.45	Pass
		7	4#2	21.00	21.18	38.45	Pass
15MHz	26865/831.5	3	1#0	21.01	21.18	38.45	Pass
		0	6#0	21.03	21.22	38.45	Pass
	26915/836.5	0	1#0	21.17	20.49	38.45	Pass
		0	6#0	21.01	21.13	38.45	Pass
	26965/841.5	8	1#5	21.01	20.56	38.45	Pass
		11	6#0	20.91	21.03	38.45	Pass

### 5.3. Occupied Bandwidth

#### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa


#### Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The occupied bandwidth is measured using spectrum analyzer.

RBW is set to 51kHz, VBW is set to 160kHz for LTE Band 26

99% power and -26dBc occupied bandwidths are recorded. Spectrum analyzer plots are included on the following pages.

#### Test Setup

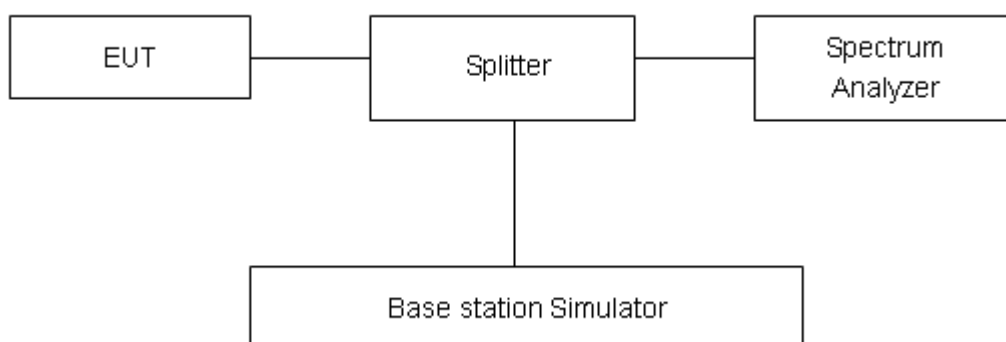

#### Limits

No specific occupied bandwidth requirements in part 2.1049.


#### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 624\text{Hz}$ .


**Test Result**

Mode	Bandwidth	Modulation	Channel/ Frequency(MHz)	RB	Index	Bandwidth(MHz)	
						99% Power	-26dBc
Band26	1.4MHz	QPSK	26915/836.5	6#0	0	1.1051	1.369
		16QAM	26915/836.5	6#0	0	0.9415	1.176
	3MHz	QPSK	26915/836.5	6#0	0	1.1102	1.345
		16QAM	26915/836.5	6#0	0	0.9504	1.193
	5MHz	QPSK	26915/836.5	6#0	0	1.1103	1.317
		16QAM	26915/836.5	6#0	0	0.9505	1.125
	10MHz	QPSK	26915/836.5	6#0	0	1.118	1.341
		16QAM	26915/836.5	6#0	0	0.9617	1.185
	15MHz	QPSK	26915/836.5	6#0	0	1.1262	1.337
		16QAM	26915/836.5	6#0	0	0.9638	1.203


### LTE Band 26 QPSK 1.4MHz CH-Middle

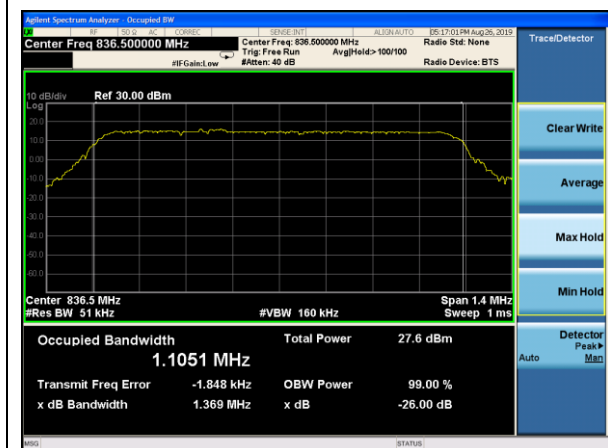


### LTE Band 26 QPSK 3MHz CH-Middle

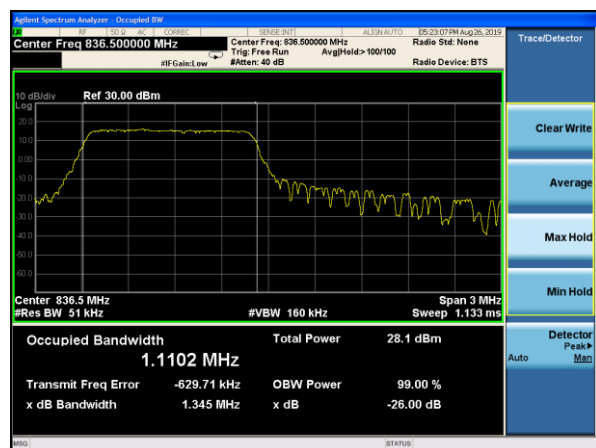


### LTE Band 26 QPSK 5MHz CH-Middle

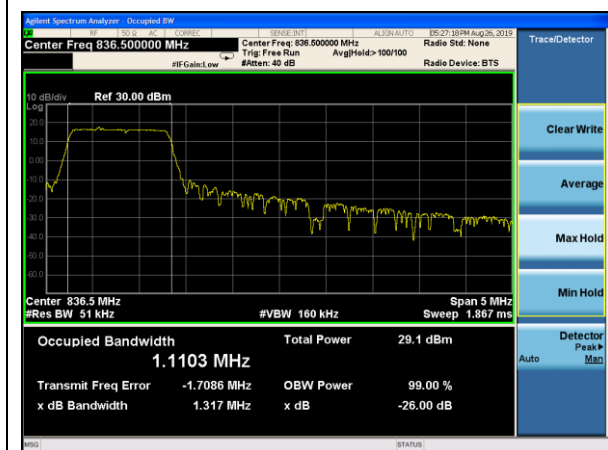


### LTE Band 26 QPSK 10MHz CH-Middle

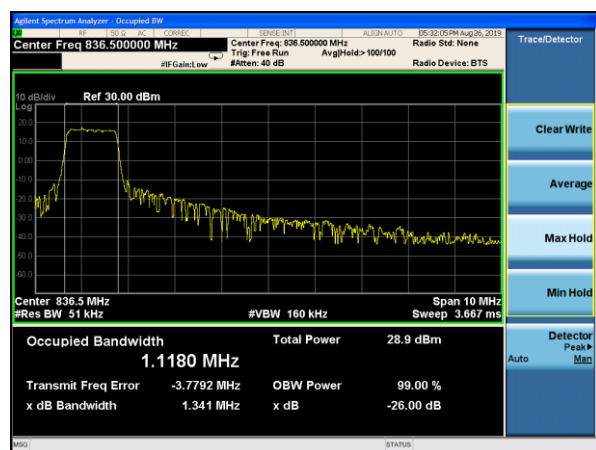


### LTE Band 26 QPSK 15MHz CH-Middle

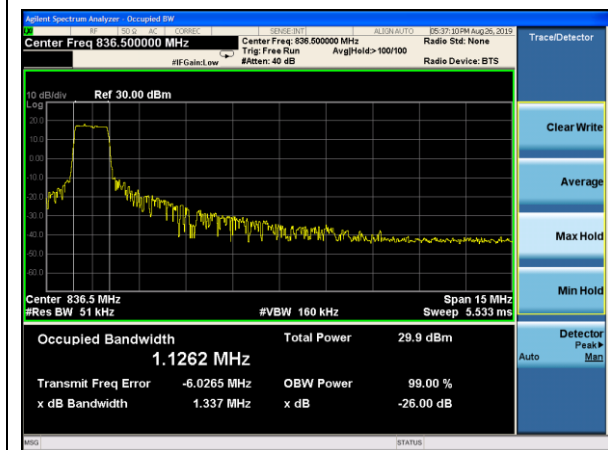


### LTE Band 26 16QAM 1.4MHz CH-Middle

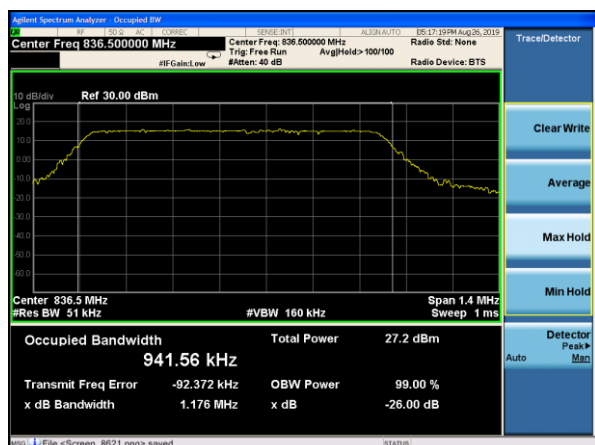


### LTE Band 26 16QAM 3MHz CH-Middle

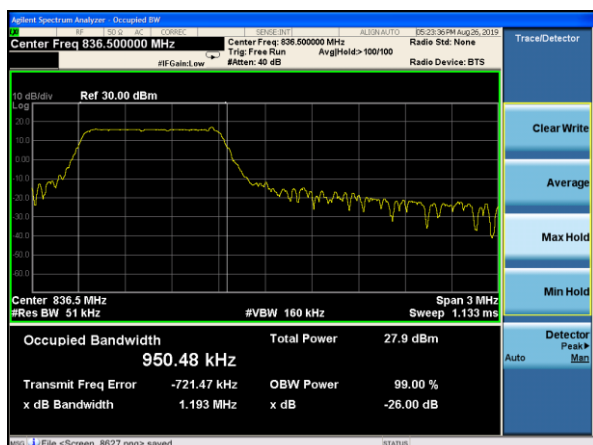


### LTE Band 26 16QAM 5MHz CH-Middle

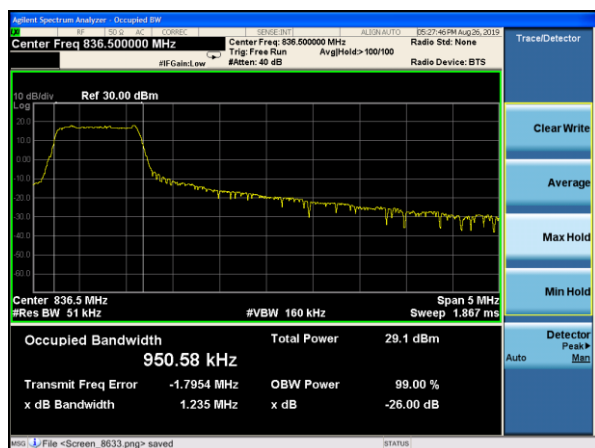

### LTE Band 26 16QAM 10MHz CH-Middle

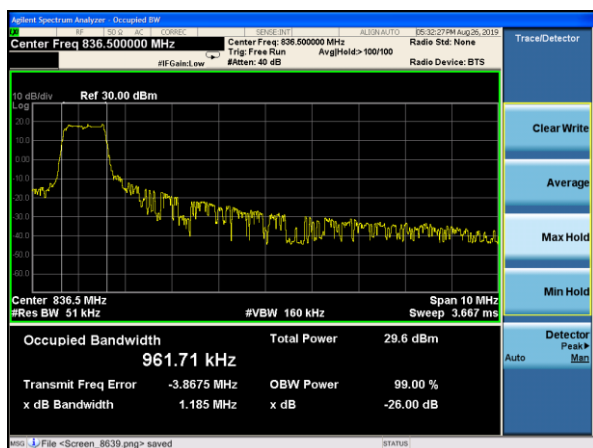

### LTE Band 26 16QAM 15MHz CH-Middle

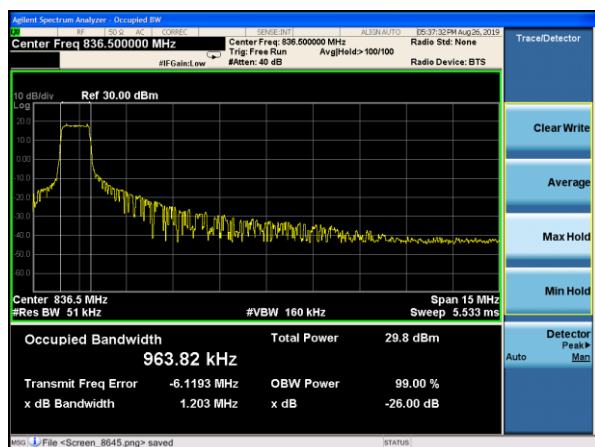



## 5.4. Band Edge Compliance

### Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

### Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The band edge of the lowest and highest channels were measured. The average detector is used. RBW is set to 51 kHz, VBW is set to 160 kHz for LTE Band 26.

Spectrum analyzer plots are included on the following pages.

### Test Setup

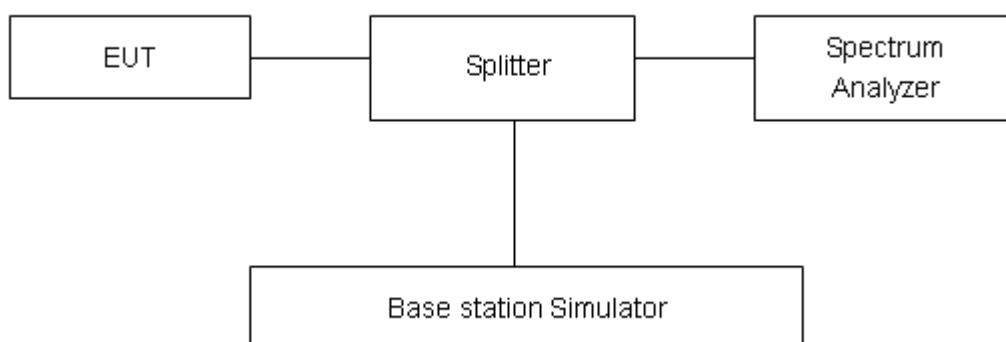

### Limits

Rule Part 22.917(a) specifies that “The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.”

Limit	-13 dBm
-------	---------


### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ ,  $U=0.684$ dB.




## Test Result:


LTE Band 26 QPSK 1.4MHz CH-Low 1RB

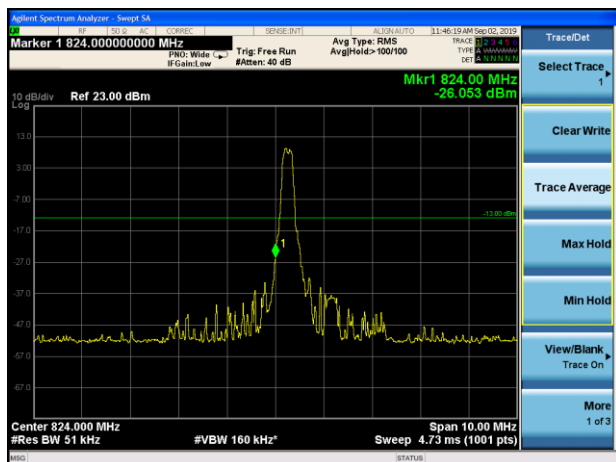


LTE Band 26 QPSK 1.4MHz CH-High 1RB

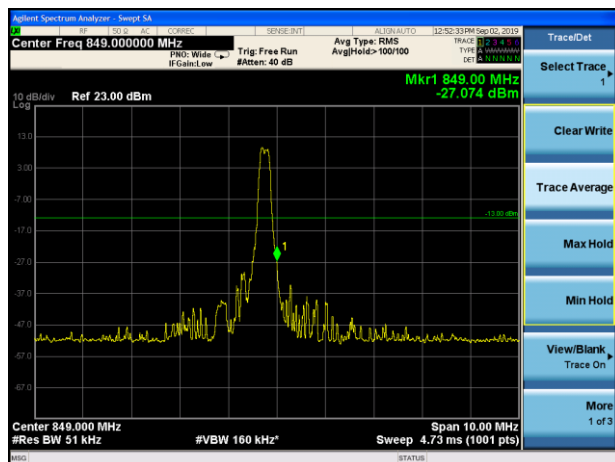


LTE Band 26 QPSK 1.4MHz CH-Low 100%RB

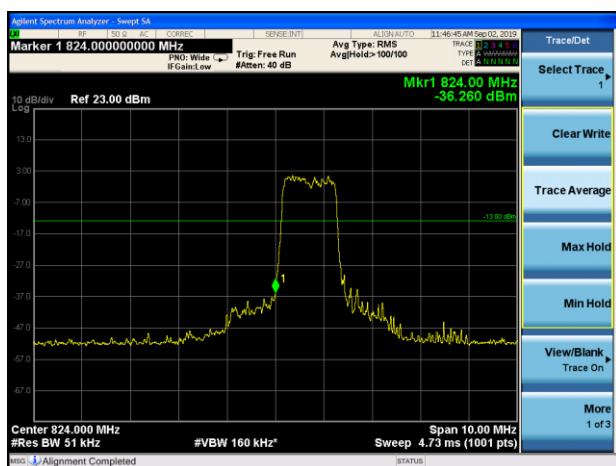


LTE Band 26 QPSK 1.4MHz CH-High 100%RB

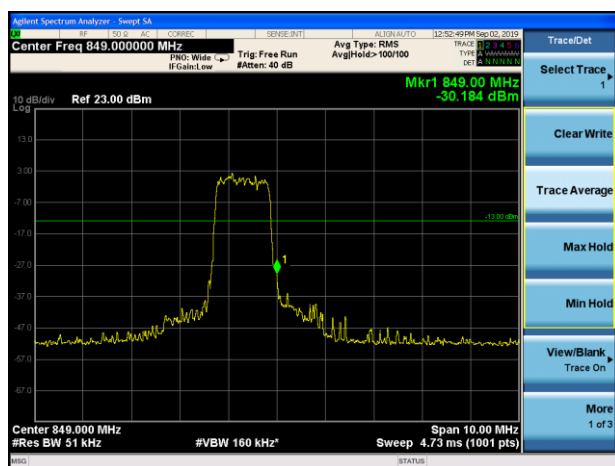


LTE Band 26 QPSK 3MHz CH-Low 1RB

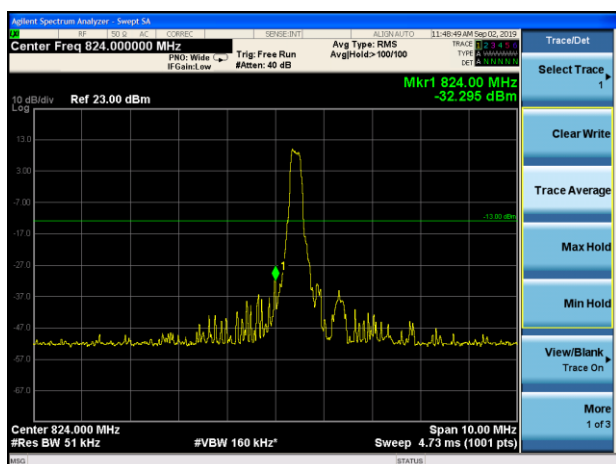


LTE Band 26 QPSK 3MHz CH-High 1RB

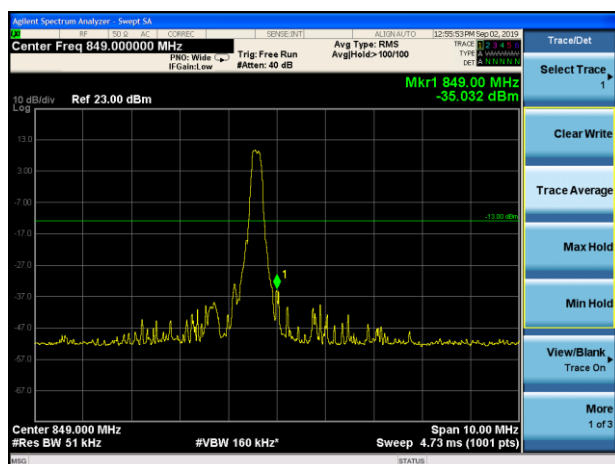


### LTE Band 26 QPSK 3MHz CH-Low 100%RB

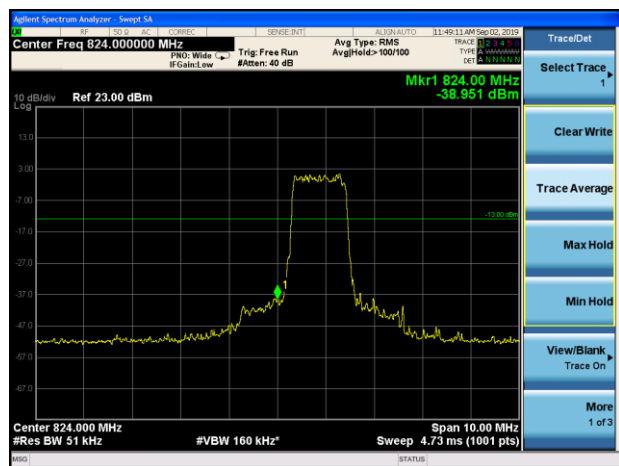


### LTE Band 26 QPSK 3MHz CH-High 100%RB

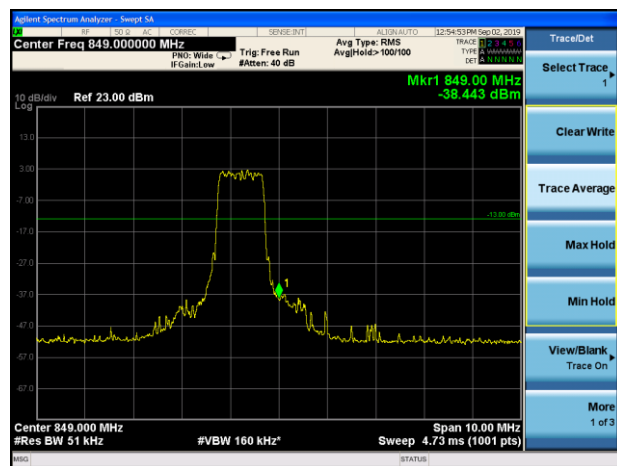


### LTE Band 26 QPSK 5MHz CH-Low 1RB

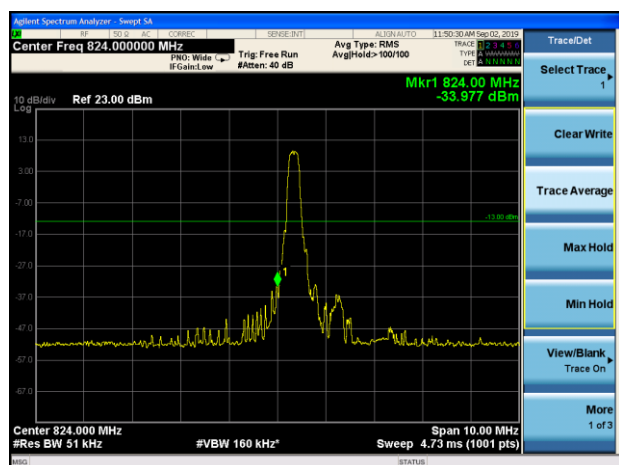


### LTE Band 26 QPSK 5MHz CH-High 1RB

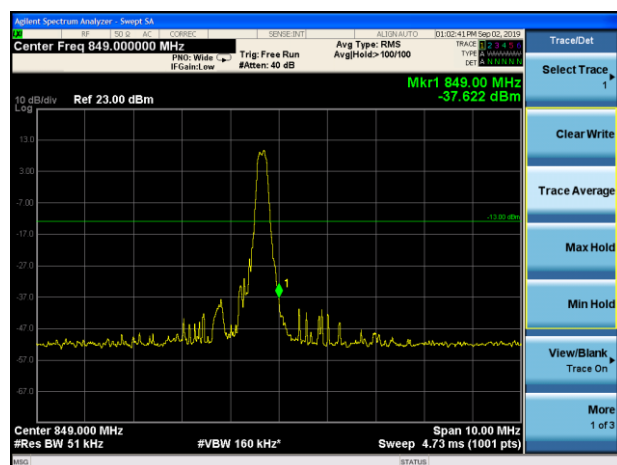

### LTE Band 26 QPSK 5MHz CH-Low 100%RB

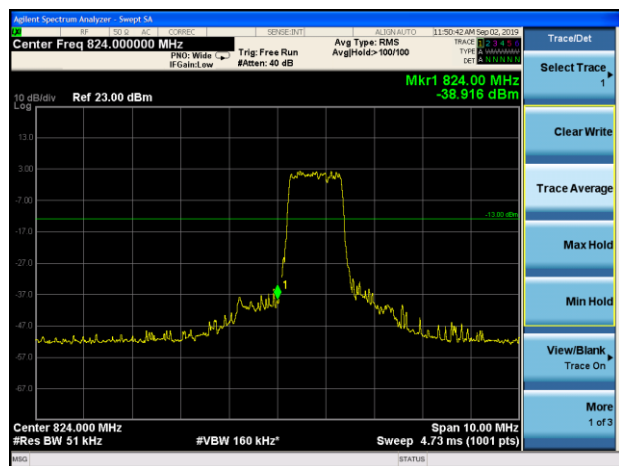


### LTE Band 26 QPSK 5MHz CH-High 100%RB

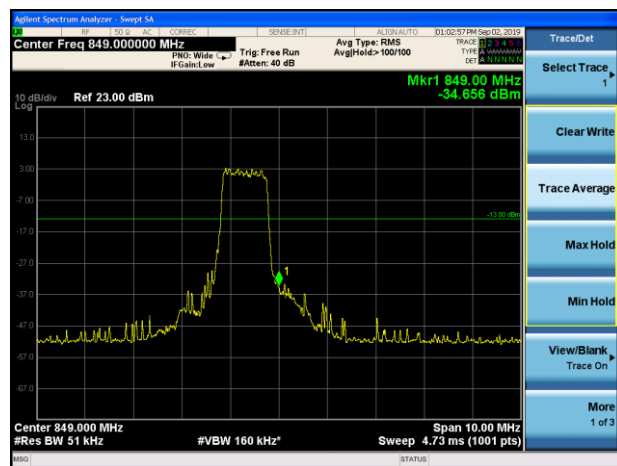





## LTE Band 26 QPSK 10MHz CH-Low 1RB

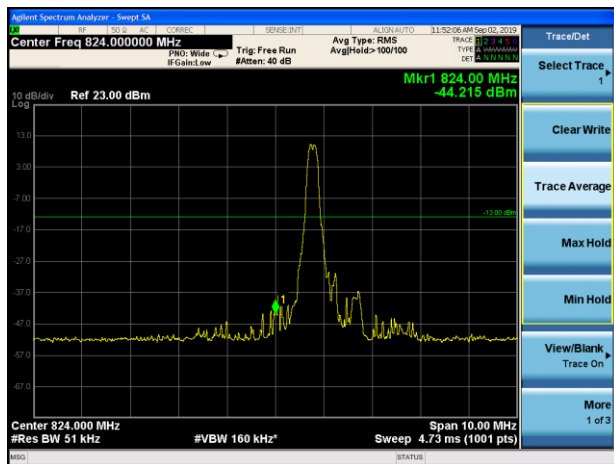


## LTE Band 26 QPSK 10MHz CH-High 1RB

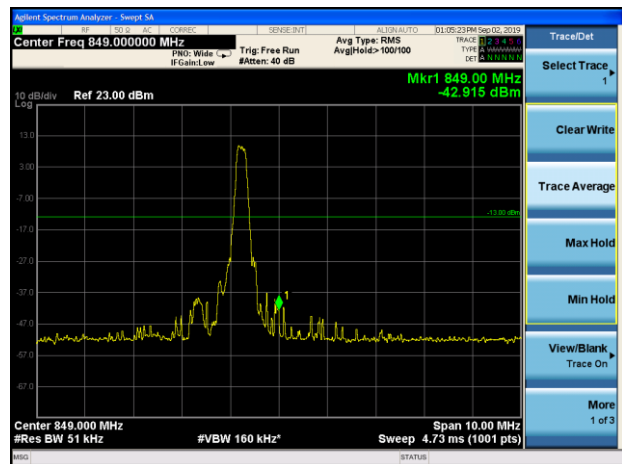


## LTE Band 26 QPSK 10MHz CH-Low 100%RB

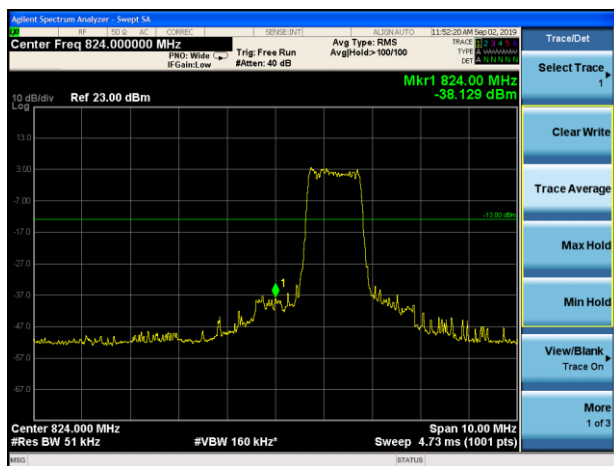


## LTE Band 26 QPSK 10MHz CH-High 100%RB

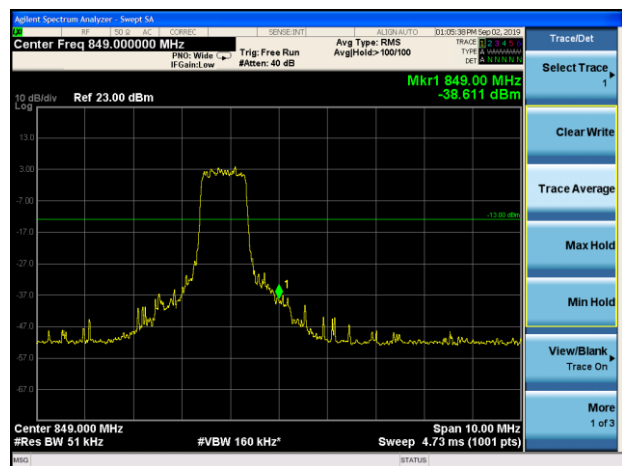


## LTE Band 26 QPSK 15MHz CH-Low 1RB

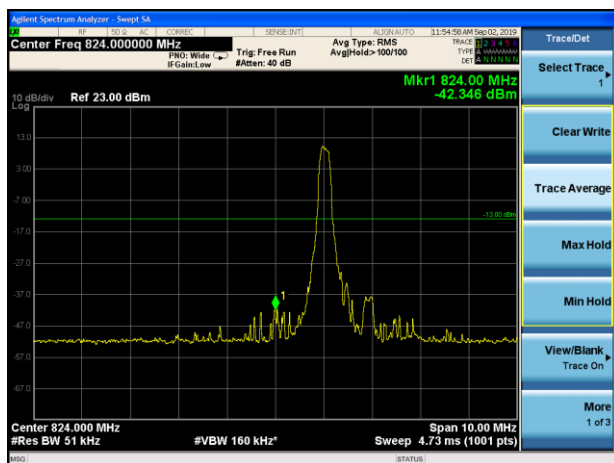


## LTE Band 26 QPSK 15MHz CH-High 1RB

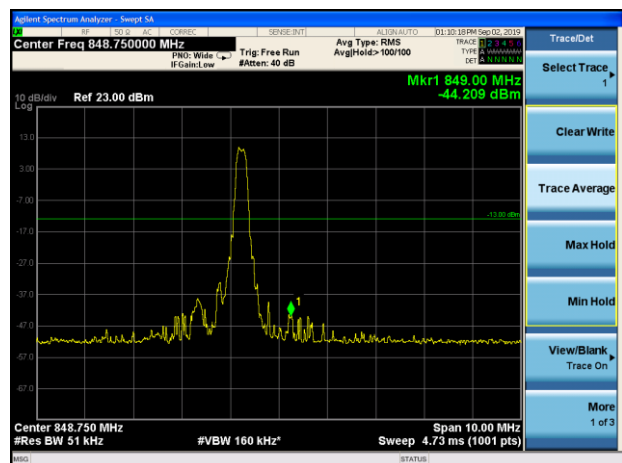


## LTE Band 26 QPSK 15MHz CH-Low 100%RB

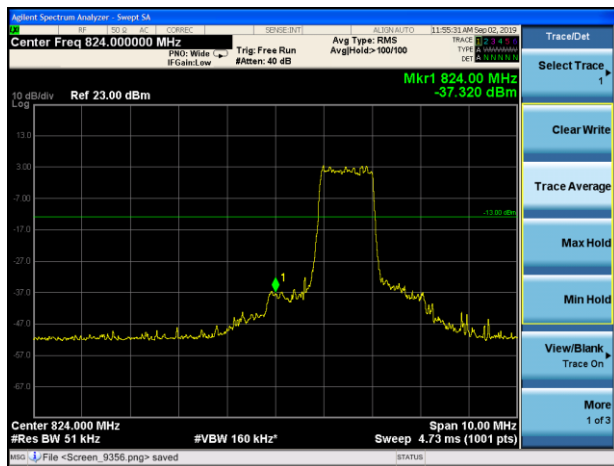


## LTE Band 26 QPSK 15MHz CH-High 100%RB

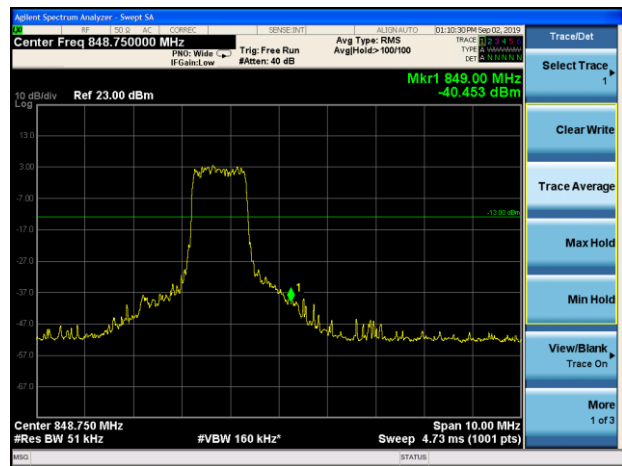


## LTE Band 26 16QAM 1.4MHz CH-Low 1RB

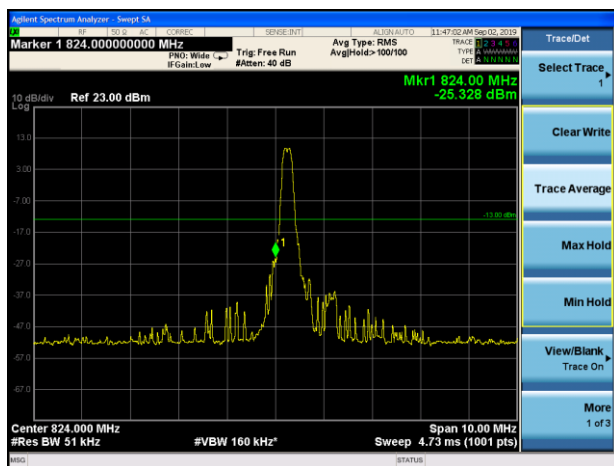


## LTE Band 26 16QAM 1.4MHz CH-High 1RB

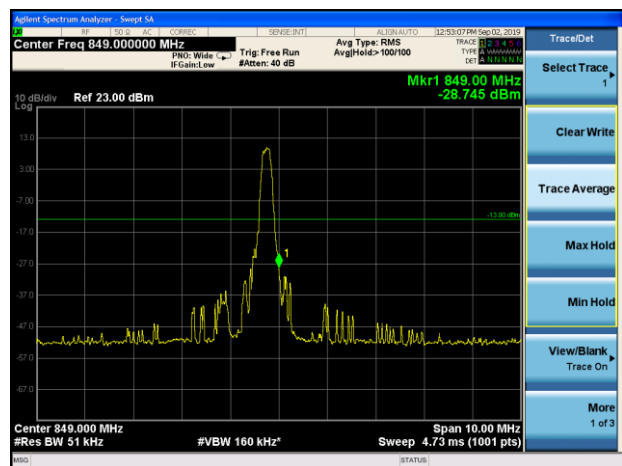

## LTE Band 26 16QAM 1.4MHz CH-Low 100%RB

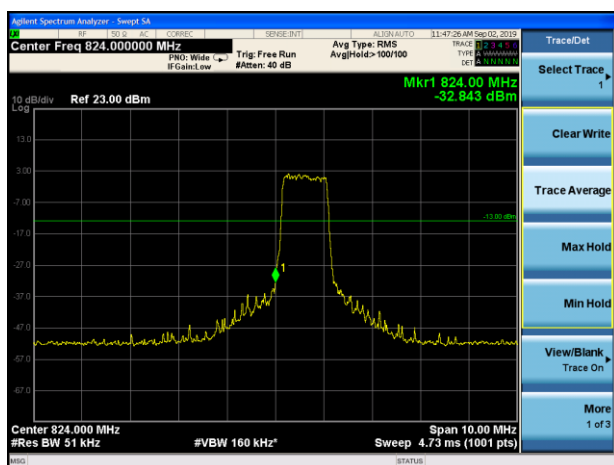


## LTE Band 26 16QAM 1.4MHz CH-High 100%RB

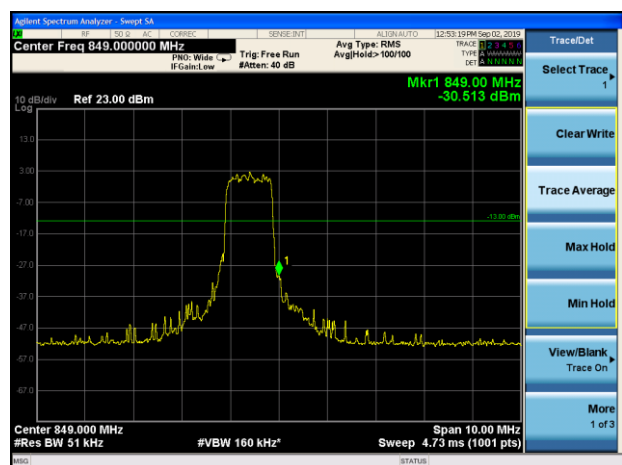





## LTE Band 26 16QAM 3MHz CH-Low 1RB

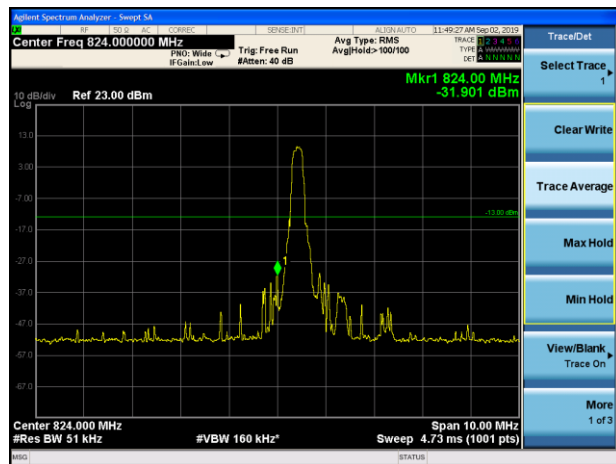


## LTE Band 26 16QAM 3MHz CH-High 1RB

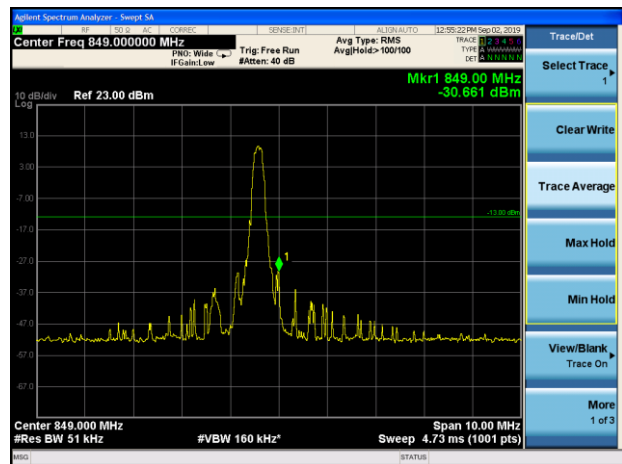


## LTE Band 26 16QAM 3MHz CH-Low 100%RB

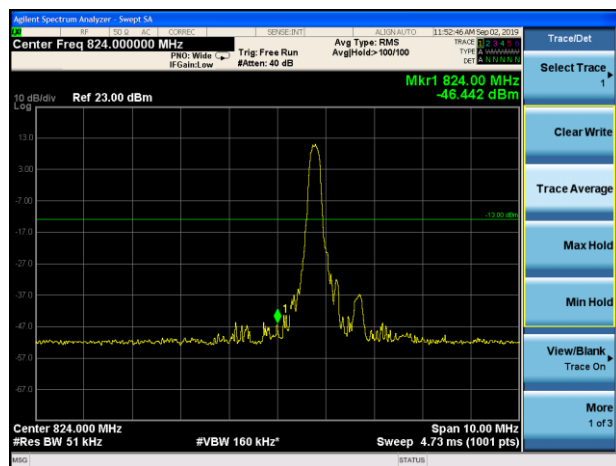


## LTE Band 26 16QAM 3MHz CH-High 100%RB

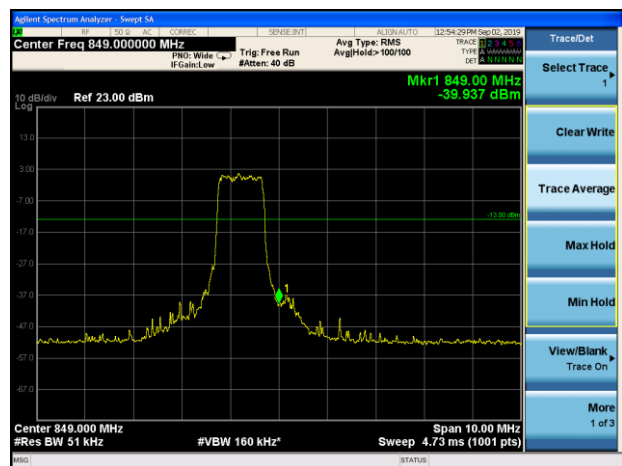

## LTE Band 26 16QAM 5MHz CH-Low 1RB

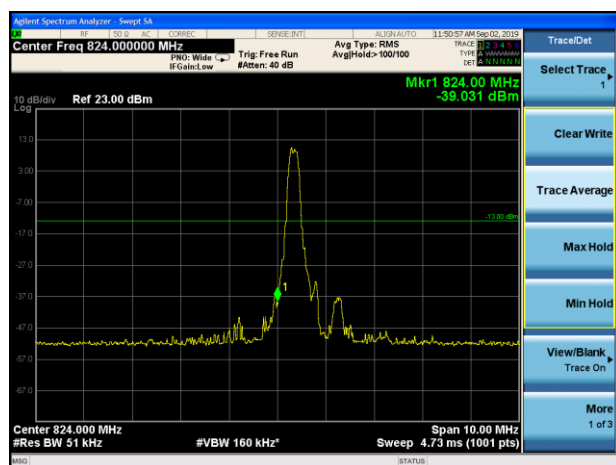


## LTE Band 26 16QAM 5MHz CH-High 1RB

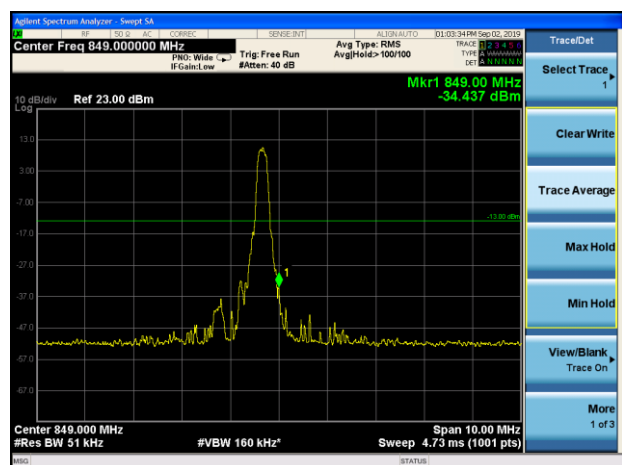







LTE Band 26 16QAM 5MHz CH-Low 100%RB

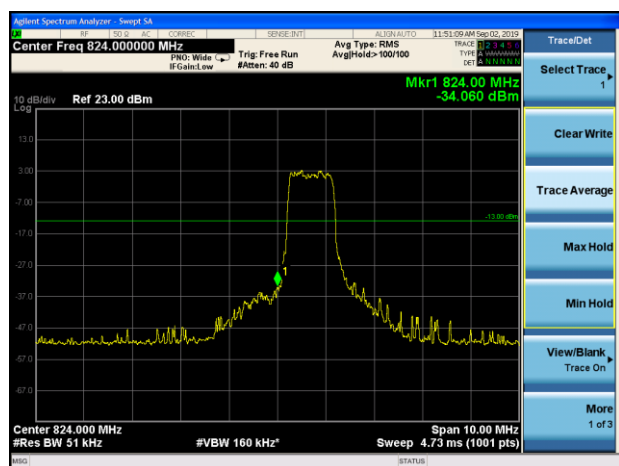


LTE Band 26 16QAM 5MHz CH-High 100%RB

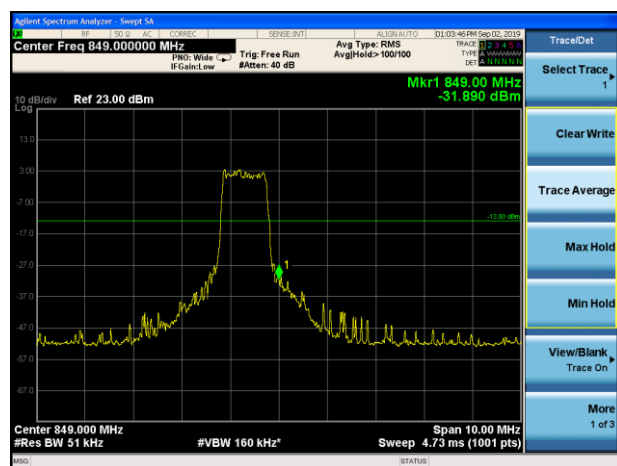


LTE Band 26 16QAM 10MHz CH-Low 1RB

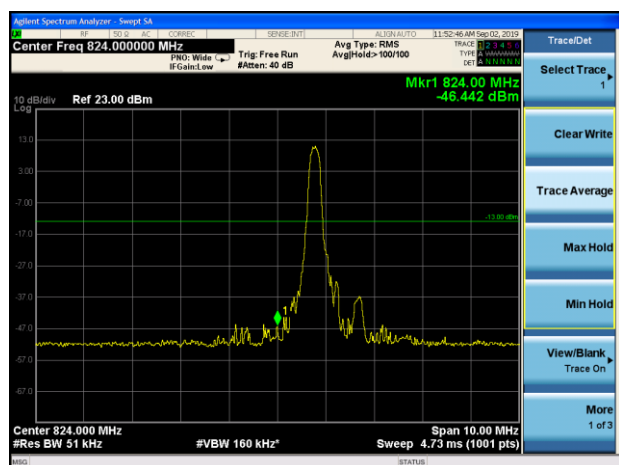


LTE Band 26 16QAM 10MHz CH-High 1RB

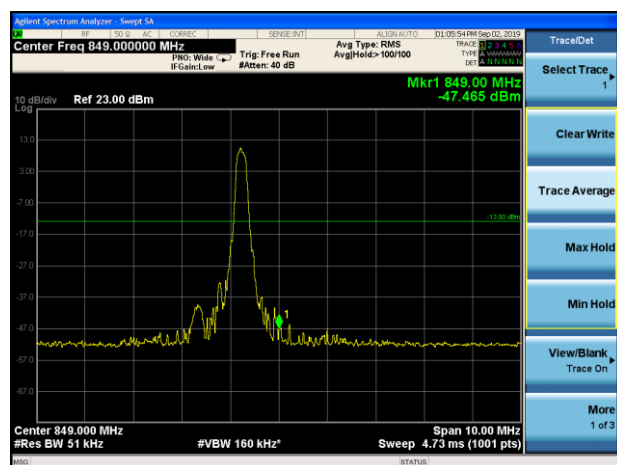

LTE Band 26 16QAM 10MHz CH-Low 100%RB

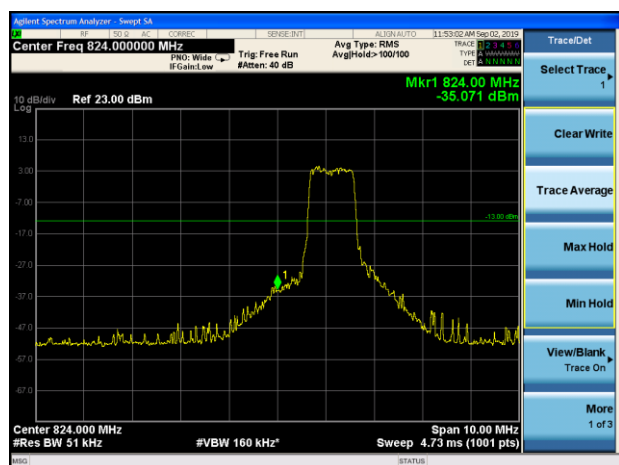


LTE Band 26 16QAM 10MHz CH-High 100%RB

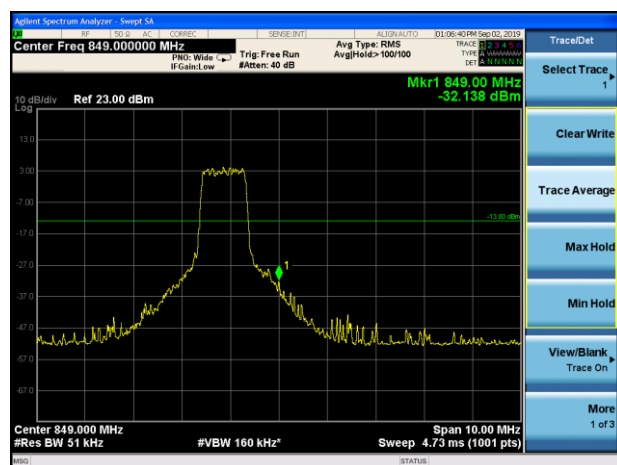





## LTE Band 26 16QAM 15MHz CH-Low 1RB

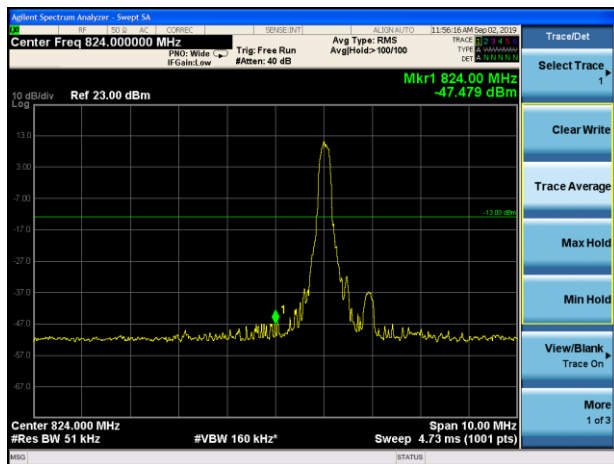


## LTE Band 26 16QAM 15MHz CH-High 1RB

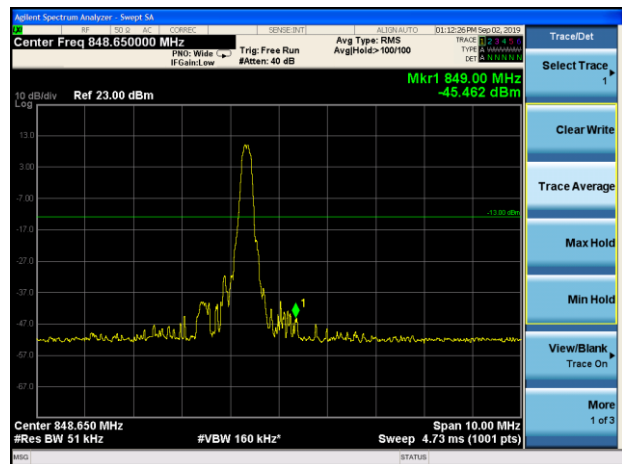

## LTE Band 26 16QAM 15MHz CH-Low 100%RB

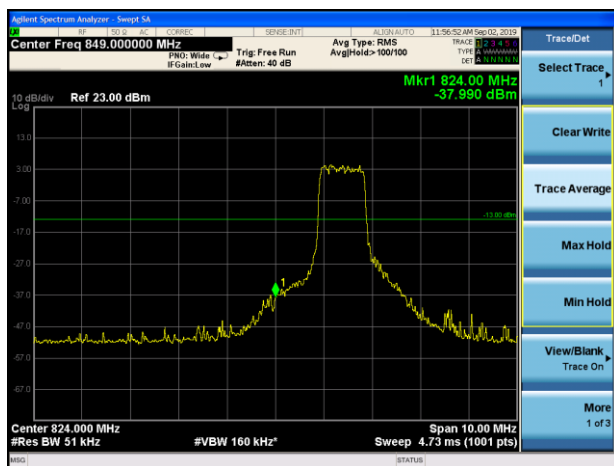

## LTE Band 26 16QAM 15MHz CH-High 100%RB

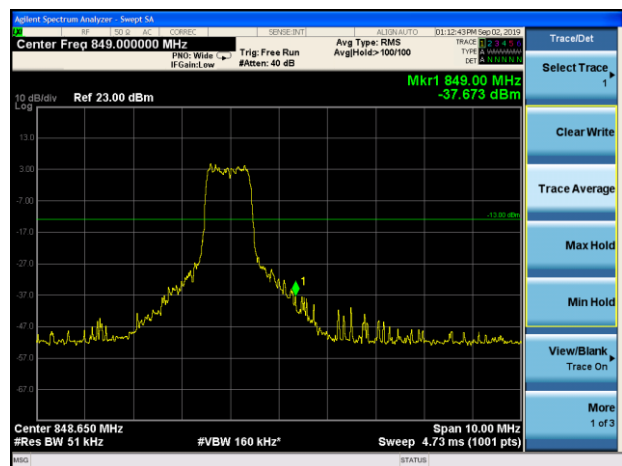



## 5.5. Peak-to-Average Power Ratio (PAPR)

### Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

### Methods of Measurement

Measure the total peak power and record as  $P_{Pk}$ . And measure the total average power and record as  $P_{Avg}$ . Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm). Determine the PAPR from:

$$PAPR (dB) = P_{Pk} (dBm) - P_{Avg} (dBm).$$

### Test Setup

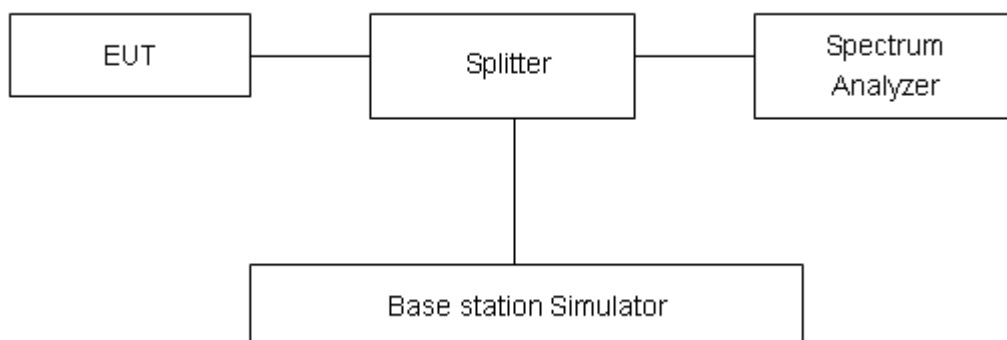

### Limits

According to the Sec. 22.913(d), The peak-to-average ratio (PAR) of the transmission must not exceed 13 dB.

### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 0.4$  dB.



## Test Results

Mode	Bandwidth	Modulation	Channel/ Frequency (MHz)	Peak-to-Average Power Ratio (PAPR)			Limit (dB)	Conclusion
				Peak (dBm)	Avg (dBm)	PAPR (dB)		
Band26	1.4MHz	QPSK	26915/836.5	23.95	14.40	9.55	≤13	PASS
		16QAM	26915/836.5	24.48	14.20	10.28	≤13	PASS
	3MHz	QPSK	26915/836.5	23.79	14.08	9.71	≤13	PASS
		16QAM	26915/836.5	24.38	13.87	10.51	≤13	PASS
	5MHz	QPSK	26915/836.5	24.55	14.94	9.61	≤13	PASS
		16QAM	26915/836.5	25.20	15.53	9.67	≤13	PASS
	10MHz	QPSK	26915/836.5	24.20	15.08	9.12	≤13	PASS
		16QAM	26915/836.5	25.14	15.36	9.78	≤13	PASS
	15MHz	QPSK	26915/836.5	24.73	14.98	9.75	≤13	PASS
		16QAM	26915/836.5	24.70	14.72	9.98	≤13	PASS

## 5.6. Frequency Stability

### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

### Method of Measurement

#### Frequency Stability (Temperature Variation)

The temperature inside the climate chamber is varied from -40°C to +85°C in 10°C step size,

(1) With all power removed, the temperature was decreased to 0°C and permitted to stabilize for three hours.

(2) Measure the carrier frequency with the test equipment in a “call mode”. These measurements should be made within 1 minute of powering up the mobile station, to prevent significant self warming.

(3) Repeat the above measurements at 10°C increments from -40°C to +85°C. Allow at least 1.5 hours at each temperature, un-powered, before making measurements. Frequency Stability (Voltage Variation)


The frequency stability shall be measured with variation of primary supply voltage as follows:

(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

(2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery-operating end point which shall be specified by the manufacturer.

This transceiver is specified to operate with an input voltage of between 3.3 V and 4.3 V, with a nominal voltage of 3.8V.

### Test setup

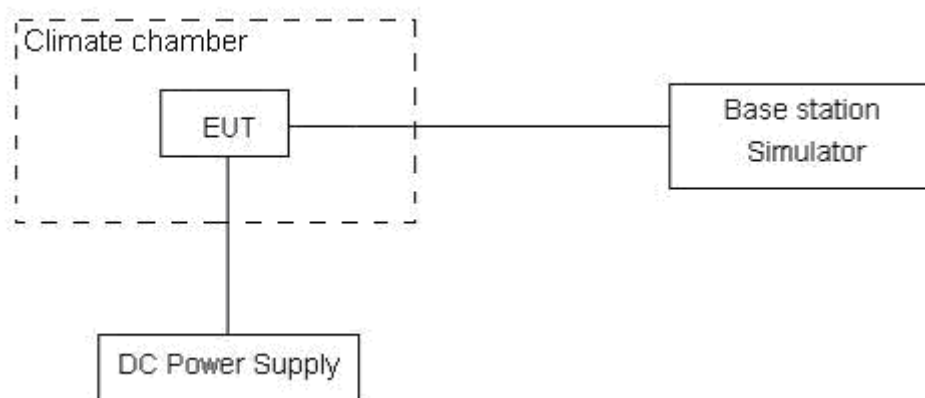

**Limits**

According to the Sec. 22.355, the frequency stability of the carrier shall be accurate to within 2.5 ppm of the received frequency for mobile stations.

Limits	$\leq 2.5$ ppm
--------	----------------

**Measurement Uncertainty**

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor  $k = 3$ ,  $U = 0.01$  ppm.

# Test Result

LTE Band 26						
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	15MHz					
Temperature	Voltage	16QAM	QPSK	16QAM	QPSK	
Normal (25℃)	Normal	6.18	14.98	0.00329	0.00797	PASS
Extreme (85℃)		2.24	5.38	0.00119	0.00286	PASS
Extreme (80℃)		1.86	16.74	0.00099	0.00890	PASS
Extreme (70℃)		9.06	6.94	0.00482	0.00369	PASS
Extreme (60℃)		11.27	1.73	0.00599	0.00092	PASS
Extreme (50℃)		1.53	9.88	0.00082	0.00526	PASS
Extreme (40℃)		15.86	2.55	0.00844	0.00135	PASS
Extreme (30℃)		13.47	7.09	0.00716	0.00377	PASS
Extreme (20℃)		17.21	1.94	0.00916	0.00103	PASS
Extreme (10℃)		5.64	6.74	0.00300	0.00358	PASS
Extreme (0℃)		4.74	9.53	0.00252	0.00507	PASS
Extreme (-10℃)		17.44	8.73	0.00928	0.00464	PASS
Extreme (-20℃)		11.20	9.55	0.00596	0.00508	PASS
Extreme (-30℃)		7.47	2.22	0.00397	0.00118	PASS
Extreme (-40℃)		5.60	10.43	0.00298	0.00555	PASS
25℃	LV	5.51	7.19	0.00293	0.00383	PASS
	HV	5.73	3.63	0.00305	0.00193	PASS

## 5.7. Spurious Emissions at Antenna Terminals

### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa


### Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The measurement is carried out using a spectrum analyzer. The spectrum analyzer scans from 9kHz to the 10th harmonic of the carrier.

The peak detector is used. RBW are set to 100 kHz and VBW are set to 300 kHz for below 1G, RBW are set to 1MHz and VBW are set to 3MHz for above 1G, Sweep is set to ATUO.

The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

### Test setup

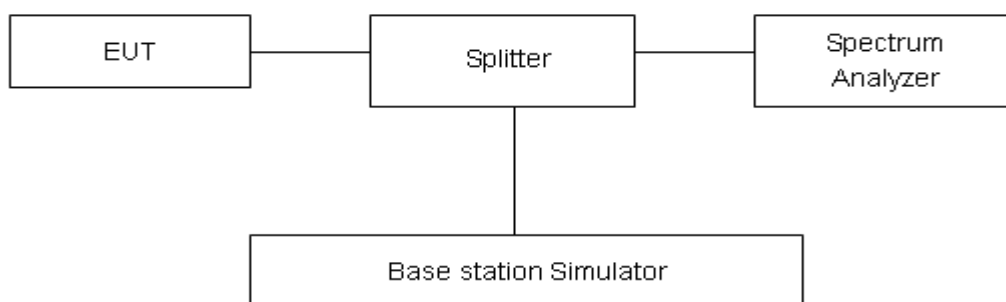

### Limits

Rule Part 22.917(a) specifies that “The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log (P)$  dB.”

Limit	-13 dBm
-------	---------

### Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ .


Frequency	Uncertainty
30MHz-1GHz	0.684 dB
1GHz-18GHz	1.407 dB

## Test Result

Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the emissions more than 20 dB below the limit are not reported.


The signal beyond the limit is carrier.

LTE Band 26 1.4MHz CH-Low 30MHz~1GHz

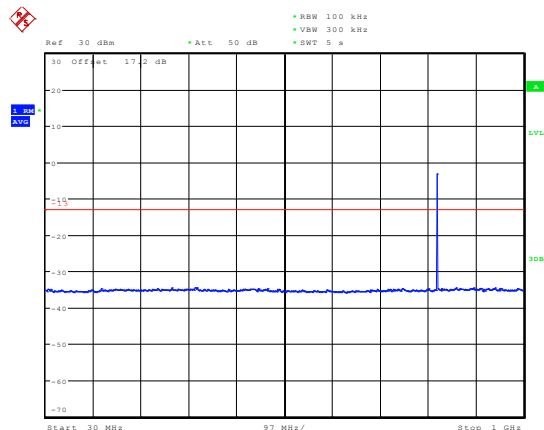


Date: 21.AUG.2019 18:23:16

LTE Band 26 1.4MHz CH-Low 1GHz~9GHz

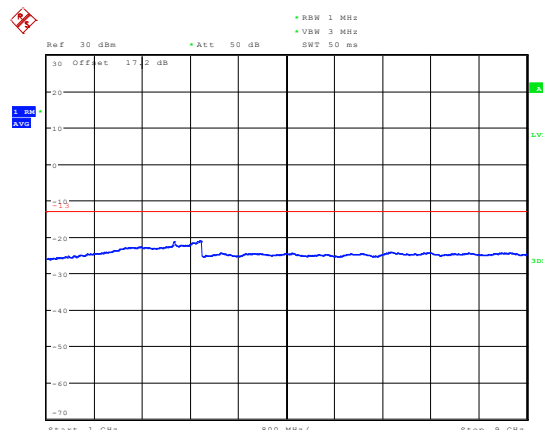


Date: 20.AUG.2019 11:09:32

LTE Band 26 1.4MHz CH-Middle 30MHz~1GHz

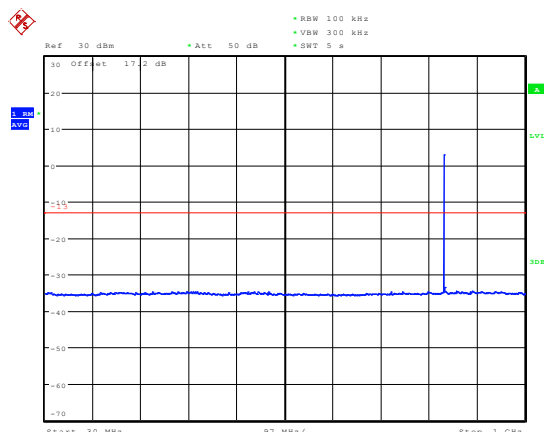


Date: 21.AUG.2019 18:24:28

LTE Band 26 1.4MHz CH-Middle 1GHz~9GHz

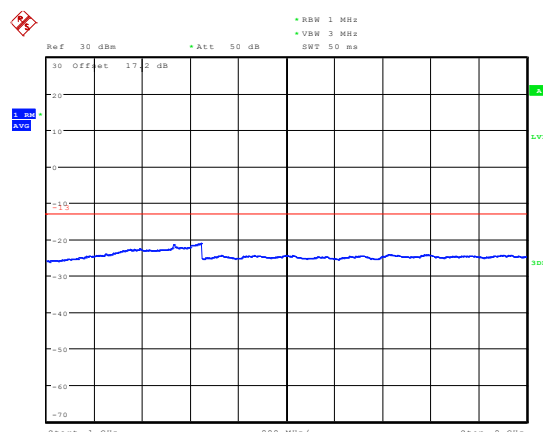


Date: 20.AUG.2019 11:10:59

LTE Band 26 1.4MHz CH-High 30MHz~1GHz

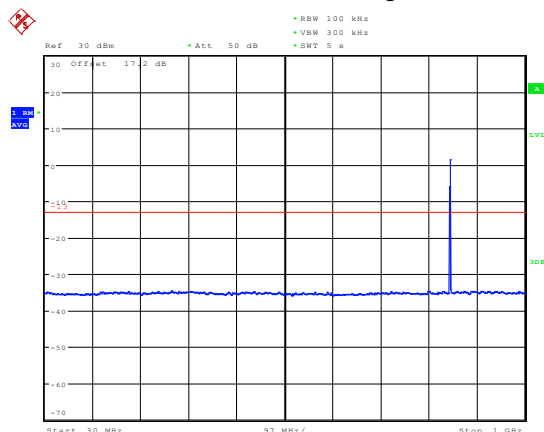

Date: 21.AUG.2019 18:25:14


LTE Band 26 1.4MHz CH-High 1GHz~9GHz

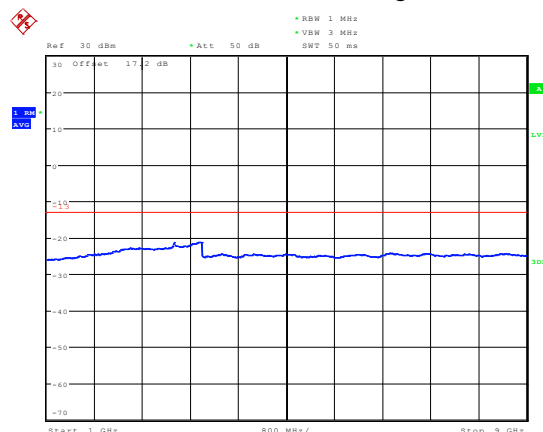

Date: 20.AUG.2019 11:12:55




## LTE Band 26 3MHz CH-Low 30MHz~1GHz

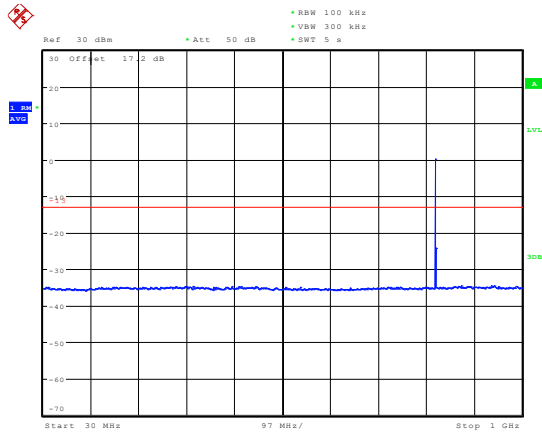


Date: 21.AUG.2019 18:41:08

## LTE Band 26 3MHz CH-Low 1GHz~9GHz

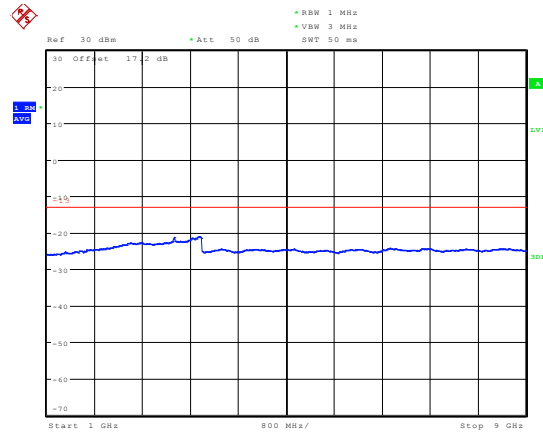


Date: 20.AUG.2019 11:15:14

## LTE Band 26 3MHz CH-Middle 30MHz~1GHz

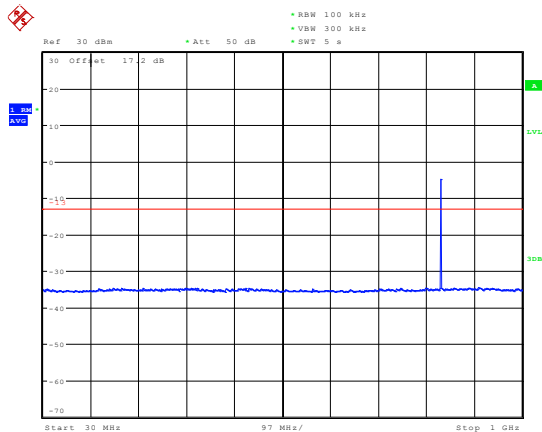


Date: 21.AUG.2019 18:41:53

## LTE Band 26 3MHz CH-Middle 1GHz~9GHz

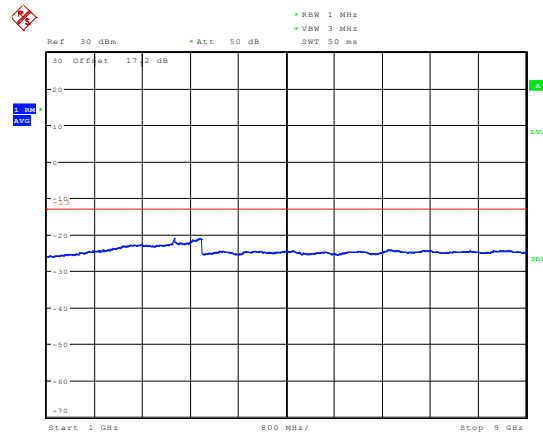


Date: 20.AUG.2019 11:17:05

## LTE Band 26 3MHz CH-High 30MHz~1GHz

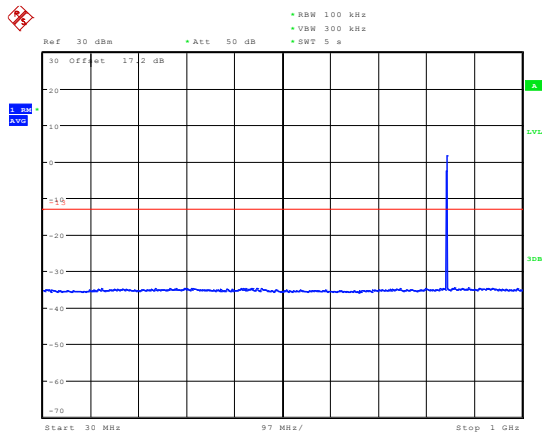

Date: 21.AUG.2019 18:42:45

## LTE Band 26 3MHz CH-High 1GHz~9GHz

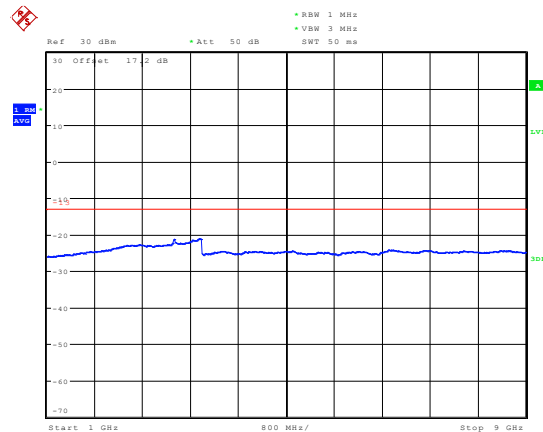


Date: 20.AUG.2019 11:18:44






## LTE Band 26 5MHz CH-Low 30MHz~1GHz

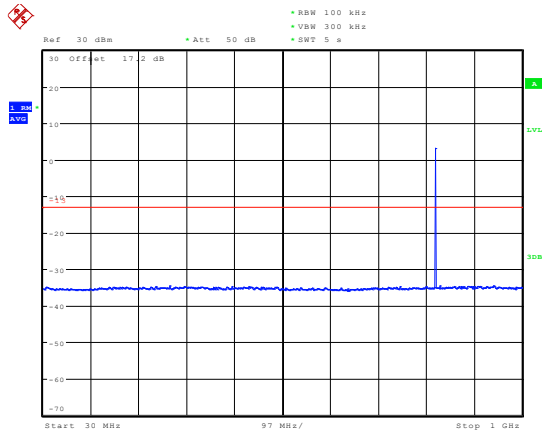


Date: 21.AUG.2019 18:43:59

## LTE Band 26 5MHz CH-Low 1GHz~9GHz

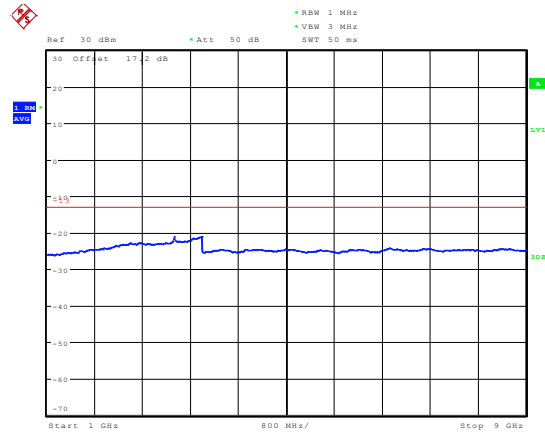


Date: 20.AUG.2019 11:20:29

## LTE Band 26 5MHz CH-Middle 30MHz~1GHz

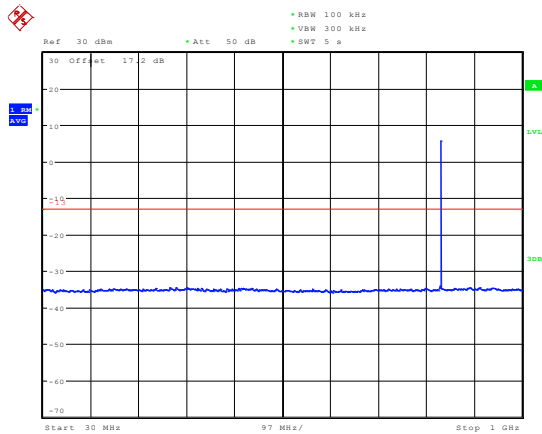


Date: 21.AUG.2019 18:44:46

## LTE Band 26 5MHz CH-Middle 1GHz~9GHz

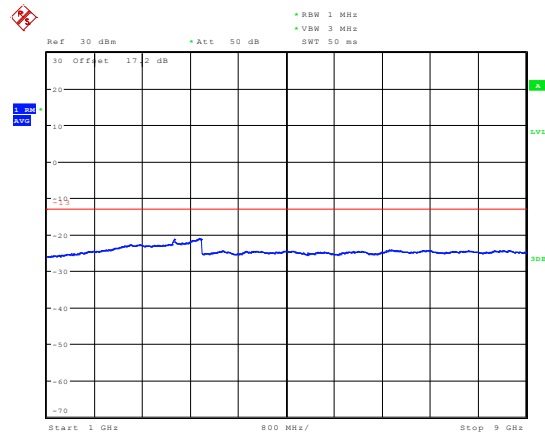


Date: 20.AUG.2019 11:22:00

## LTE Band 26 5MHz CH-High 30MHz~1GHz

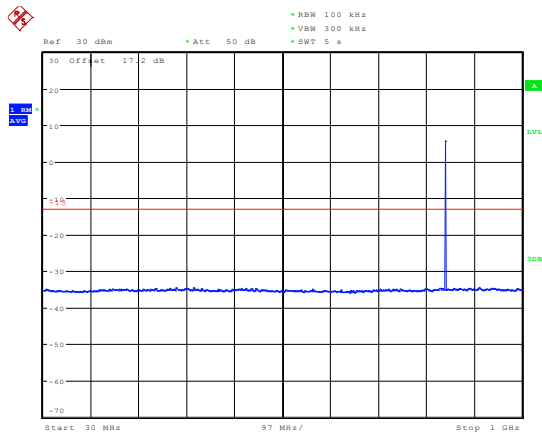

Date: 21.AUG.2019 18:46:44


## LTE Band 26 5MHz CH-High 1GHz~9GHz

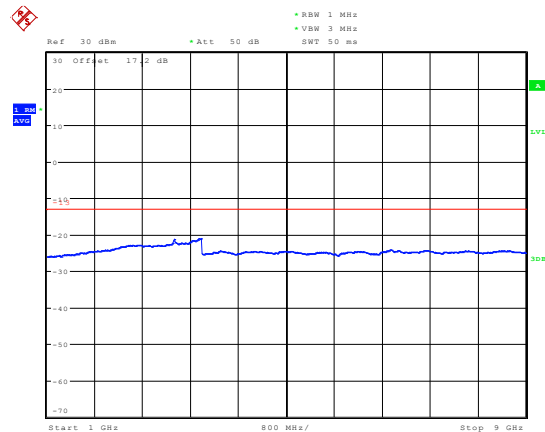

Date: 20.AUG.2019 11:23:41




## LTE Band 26 10MHz CH-Low 30MHz~1GHz

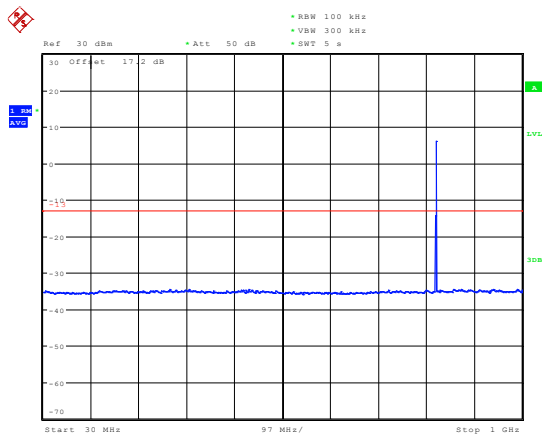


Date: 21.AUG.2019 18:47:21

## LTE Band 26 10MHz CH-Low 1GHz~9GHz

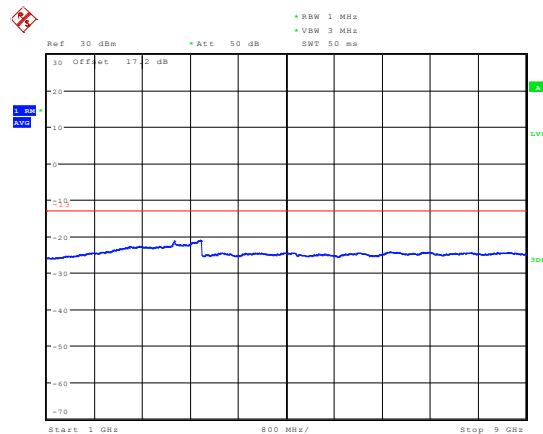


Date: 20.AUG.2019 11:25:20

## LTE Band 26 10MHz CH-Middle 30MHz~1GHz

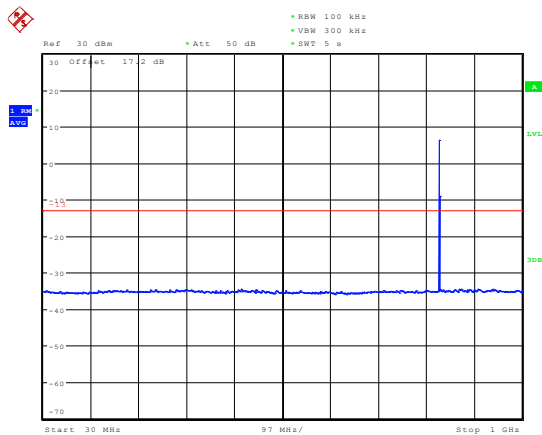


Date: 21.AUG.2019 18:47:47

## LTE Band 26 10MHz CH-Middle 1GHz~9GHz

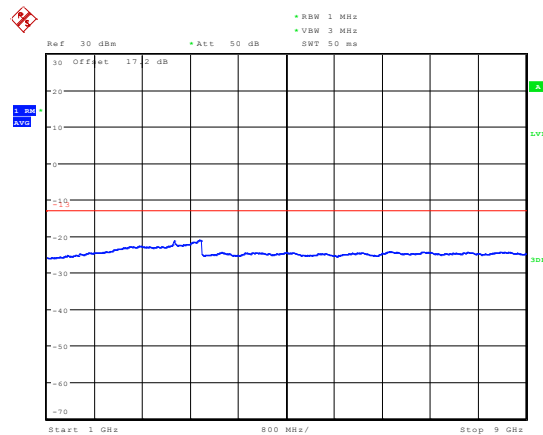


Date: 20.AUG.2019 11:27:04

## LTE Band 26 10MHz CH-High 30MHz~1GHz

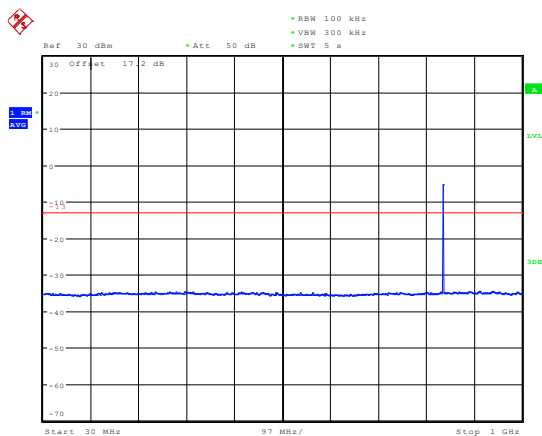

Date: 21.AUG.2019 18:48:49


## LTE Band 26 10MHz CH-High 1GHz~9GHz

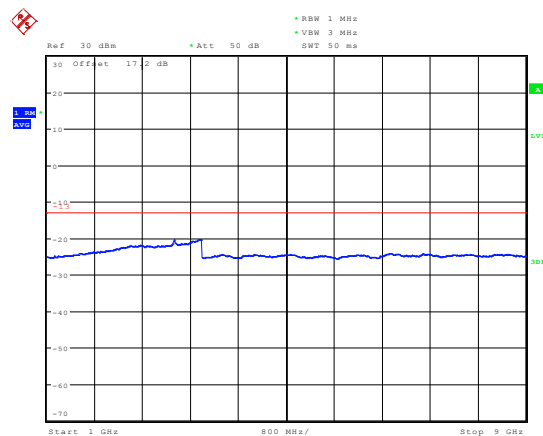

Date: 8.SEP.2019 11:16:14




## LTE Band 26 15MHz CH-Low 30MHz~1GHz

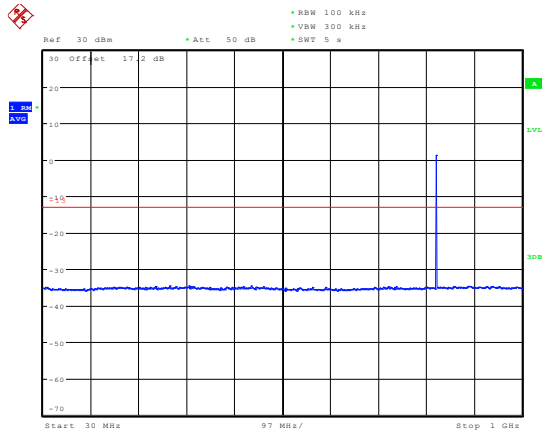


Date: 21.AUG.2019 18:49:18

## LTE Band 26 15MHz CH-Low 1GHz~9GHz

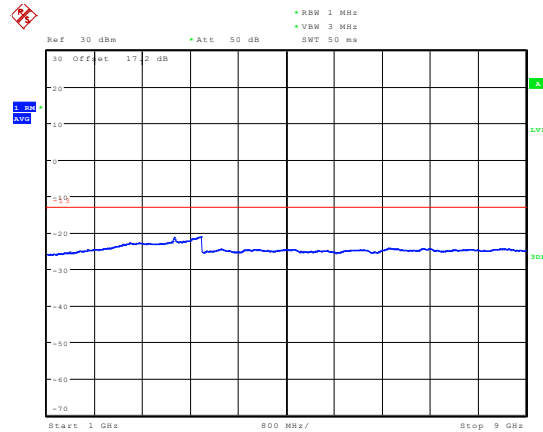


Date: 20.AUG.2019 11:29:51

## LTE Band 26 15MHz CH-Middle 30MHz~1GHz

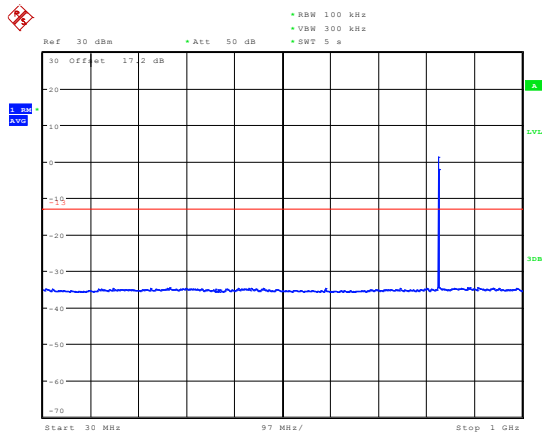


Date: 21.AUG.2019 18:50:30

## LTE Band 26 15MHz CH-Middle 1GHz~9GHz

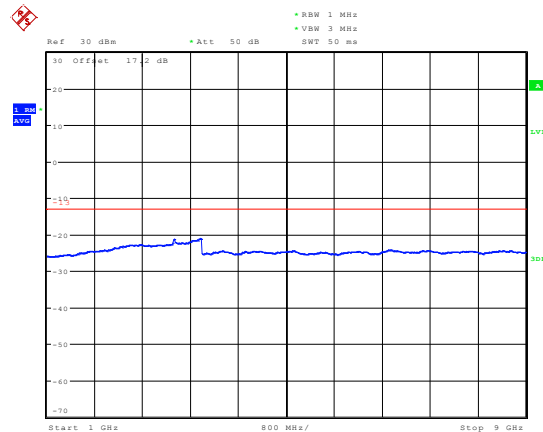


Date: 20.AUG.2019 11:31:08

## LTE Band 26 15MHz CH-High 30MHz~1GHz

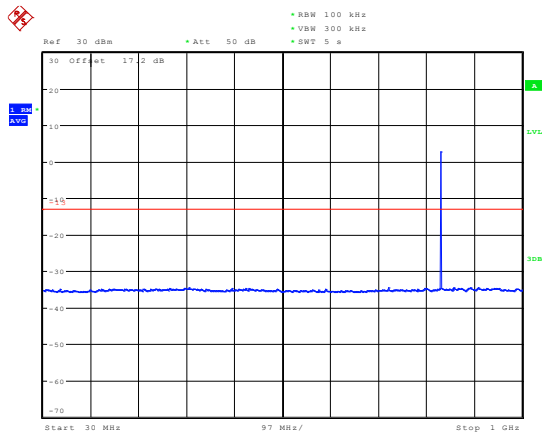

Date: 21.AUG.2019 18:51:08

## LTE Band 26 15MHz CH-High 1GHz~9GHz

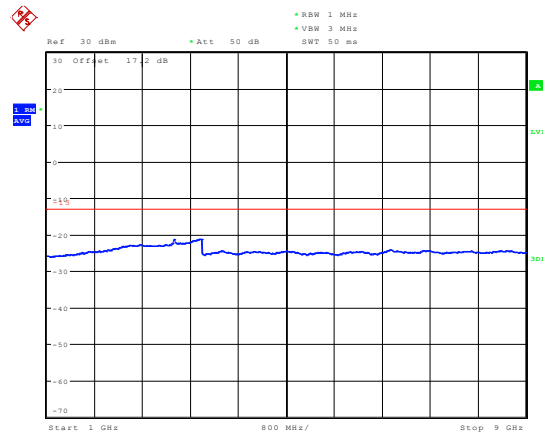

Date: 20.AUG.2019 11:32:29

## 5.8. Radiates Spurious Emission

### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

### Method of Measurement

1. The testing follows FCC KDB 971168 v03r01 Section 5.8 and ANSI C63.26 (2015).
2. Below 1GHz: The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H). Above 1GHz: (Note: the FCC's permission to use 1.5m as an alternative per TCBC Conf call of Dec. 2, 2014.) The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).
3. A loop antenna, A log-periodic antenna or horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
4. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=200Hz,VBW=600Hz for 9kHz150kHz , RBW=10kHz, VBW=30kHz 150kHz-30MHz , RBW=100kHz,VBW=300kHz for 30MHz to 1GHz and RBW=1MHz, VBW=3MHz for above 1GHz, And the maximum value of the receiver should be recorded as (Pr).
5. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
6. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAG) should be recorded after test.
7. The measurement results are obtained as described below:  

$$\text{Power(EIRP)} = \text{PMea} - \text{PAG} - \text{Pcl} + \text{Ga}$$
The measurement results are amend as described below:  


$$\text{Power(EIRP)} = \text{PMea} - \text{Pcl} + \text{Ga}$$
8. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi)

and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $ERP = EIRP - 2.15\text{dBi}$ .


The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

## Test setup


### 9KHz ~ 30MHz

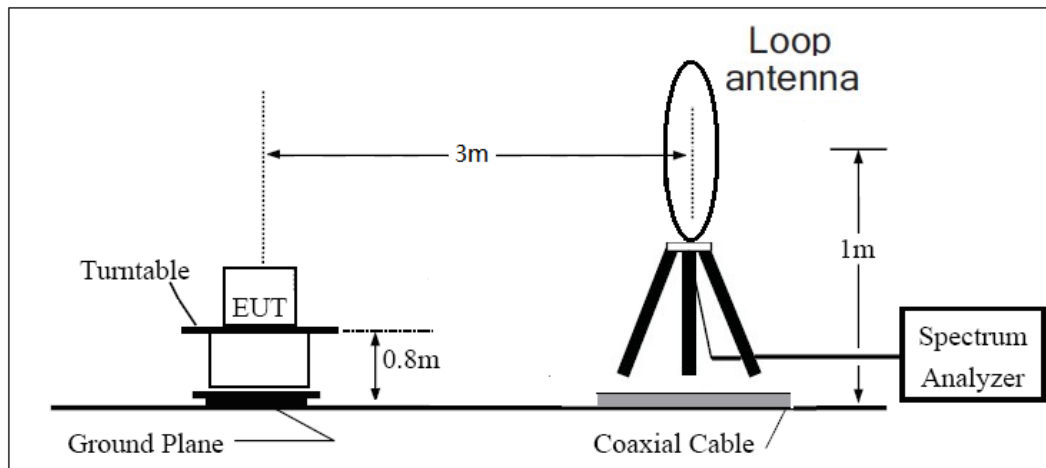

### 30MHz ~ 1GHz

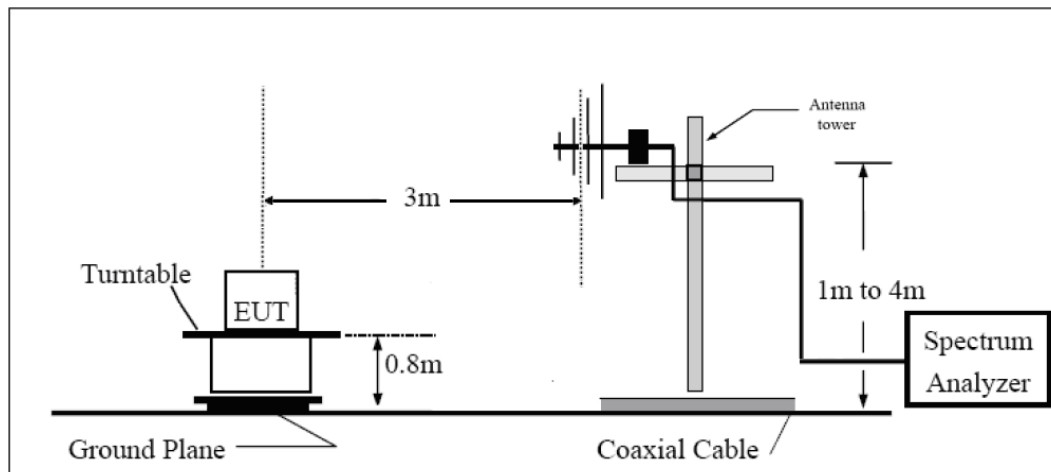

### Above 1GHz

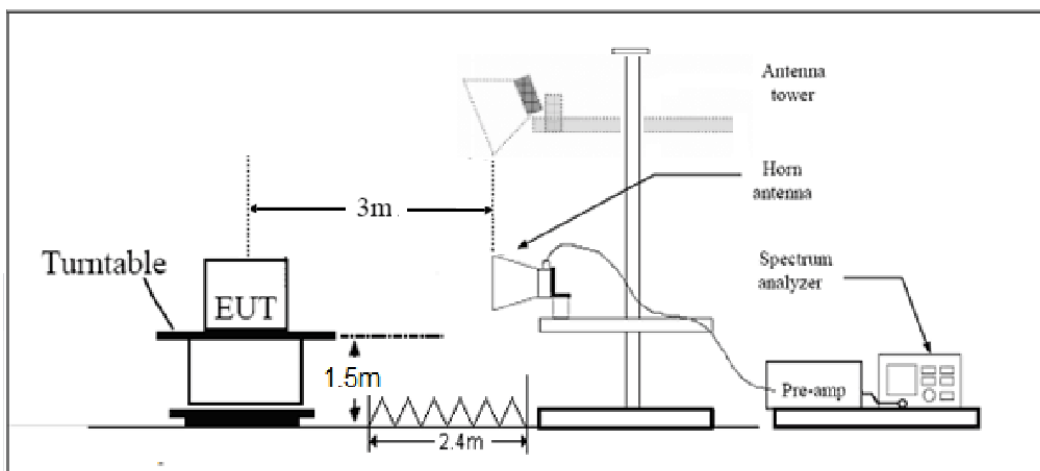



Note: Area side:2.4mX3.6m

### Limits

Rule Part 22.917(a) specifies that “The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log (P)$  dB.”

Limit	-13 dBm
-------	---------

### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ ,  $U = 3.55$  dB.

**Test Result**

Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the emissions below the noise floor will not be recorded in the report.

## LTE Band 26 1.4MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1673.00	-52.62	2.00	10.75	Horizontal	-46.02	-13.00	33.02	135
3	2509.50	-55.70	2.51	11.05	Horizontal	-49.31	-13.00	36.31	225
4	3346.00	-62.91	4.20	11.15	Horizontal	-58.11	-13.00	45.11	0
5	4182.50	-57.90	5.20	11.15	Horizontal	-54.10	-13.00	41.10	135
6	5019.00	-58.96	5.50	11.95	Horizontal	-54.66	-13.00	41.66	180
7	5855.50	-59.63	5.70	13.55	Horizontal	-53.93	-13.00	40.93	45
8	6692.00	-57.56	6.30	13.75	Horizontal	-52.26	-13.00	39.26	90
9	7528.50	-54.36	6.80	13.85	Horizontal	-49.46	-13.00	36.46	225
10	8365.00	-55.60	6.90	14.25	Horizontal	-50.40	-13.00	37.40	315

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Horizontal position.

## LTE Band 26 5MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1673.00	-53.96	2.00	10.75	Horizontal	-47.36	-13.00	34.36	315
3	2509.50	-53.27	2.51	11.05	Horizontal	-46.88	-13.00	33.88	135
4	3346.00	-62.03	4.20	11.15	Horizontal	-57.23	-13.00	44.23	45
5	4182.50	-60.30	5.20	11.15	Horizontal	-56.50	-13.00	43.50	180
6	5019.00	-57.91	5.50	11.95	Horizontal	-53.61	-13.00	40.61	225
7	5855.50	-60.13	5.70	13.55	Horizontal	-54.43	-13.00	41.43	0
8	6692.00	-57.94	6.30	13.75	Horizontal	-52.64	-13.00	39.64	315
9	7528.50	-53.46	6.80	13.85	Horizontal	-48.56	-13.00	35.56	90
10	8365.00	-55.08	6.90	14.25	Horizontal	-49.88	-13.00	36.88	135

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Horizontal position.



## LTE Band 26 15MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1673.00	-53.81	2.00	10.75	Horizontal	-47.21	-13.00	34.21	180
3	2509.50	-54.55	2.51	11.05	Horizontal	-48.16	-13.00	35.16	315
4	3346.00	-62.91	4.20	11.15	Horizontal	-58.11	-13.00	45.11	225
5	4182.50	-58.60	5.20	11.15	Horizontal	-54.80	-13.00	41.80	180
6	5019.00	-58.82	5.50	11.95	Horizontal	-54.52	-13.00	41.52	90
7	5855.50	-59.06	5.70	13.55	Horizontal	-53.36	-13.00	40.36	45
8	6692.00	-56.82	6.30	13.75	Horizontal	-51.52	-13.00	38.52	315
9	7528.50	-55.14	6.80	13.85	Horizontal	-50.24	-13.00	37.24	0
10	8365.00	-52.89	6.90	14.25	Horizontal	-47.69	-13.00	34.69	135

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Horizontal position.





## 6. Main Test Instruments

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Date
Base Station Simulator	R&S	CMW500	113824	2019-05-19	2020-05-18
Power Splitter	Hua Xiang	SHX-GF2-2-13	10120101	/	/
Spectrum Analyzer	Key sight	N9010A	MY50210259	2019-05-19	2020-05-18
Universal Radio Communication Tester	Key sight	E5515C	MY48367192	2019-05-19	2020-05-18
Signal Analyzer	R&S	FSV30	100815	2018-12-16	2019-12-15
Loop Antenna	SCHWARZBECK	FMZB1519	1519-047	2017-09-26	2019-09-25
Trilog Antenna	SCHWARZBECK	VUBL 9163	9163-201	2017-11-18	2019-11-17
Horn Antenna	R&S	HF907	100126	2018-07-07	2020-07-06
Horn Antenna	ETS-Lindgren	3160-09	00102643	2018-06-20	2020-06-19
Signal generator	R&S	SMB 100A	102594	2019-05-19	2020-05-18
Climatic Chamber	ESPEC	SU-242	93000506	2017-12-17	2020-12-16
Preamplifier	R&S	SCU18	102327	2019-05-19	2020-05-18
MOB COMMS DC SUPPLY	Keysight	66319D	MY43004105	2019-05-20	2020-05-21
RF Cable	Agilent	SMA 15cm	0001	2019-06-14	2019-09-13
Software	R&S	EMC32	9.26.0	/	/

\*\*\*\*\*END OF REPORT \*\*\*\*\*