



# RF TEST REPORT

**Applicant**      Quectel Wireless Solutions Co., Ltd  
**FCC ID**          XMR201910BG95M3  
**Product**        LTE Cat M1 & Cat NB2 & EGPRS Module  
**Brand**           Quectel  
**Model**           BG95-M3  
**Report No.**      R2003A0152-R2  
**Issue Date**      May 22, 2020

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 2 (2019)/ FCC CFR 47 Part 24E (2019)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

*Performed by: Peng Tao*

*Approved by: Kai Xu*

## TA Technology (Shanghai) Co., Ltd.

*No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China*

*TEL: +86-021-50791141/2/3*

*FAX: +86-021-50791141/2/3-8000*



## TABLE OF CONTENT

|   |    |
|---|----|
| 1. Test Laboratory .....                            | 4  |
| 1.1. Notes of the test report.....                  | 4  |
| 1.2. Test facility.....                             | 4  |
| 1.3. Testing Location .....                         | 4  |
| 2. General Description of Equipment under Test..... | 5  |
| 3. Applied Standards.....                           | 6  |
| 4. Test Configuration.....                          | 7  |
| 5. Test Case Results.....                           | 9  |
| 5.1. RF Power Output.....                           | 9  |
| 5.2. Effective Isotropic Radiated Power .....       | 13 |
| 5.3. Occupied Bandwidth .....                       | 18 |
| 5.4. Band Edge Compliance.....                      | 27 |
| 5.5. Peak-to-Average Power Ratio (PAPR) .....       | 45 |
| 5.6. Frequency Stability.....                       | 48 |
| 5.7. Spurious Emissions at Antenna Terminals .....  | 52 |
| 5.8. Radiates Spurious Emission .....               | 73 |
| 6. Main Test Instruments .....                      | 80 |

### Summary of measurement results

| No. | Test Case                               | Clause in FCC rules        | Verdict |
|-----|---|----------------------------|---------|
| 1   | RF power output                         | 2.1046                     | PASS    |
| 2   | Effective Isotropic Radiated power      | 24.232(c)                  | PASS    |
| 3   | Occupied Bandwidth                      | 2.1049                     | PASS    |
| 4   | Band Edge Compliance                    | 2.1051 /24.238(a)          | PASS    |
| 5   | Peak-to-Average Power Ratio             | 24.232/KDB 971168 D01(5.7) | PASS    |
| 6   | Frequency Stability                     | 2.1055 / 24.235            | PASS    |
| 7   | Spurious Emissions at Antenna Terminals | 2.1051 / 24.238(a)         | PASS    |
| 8   | Radiates Spurious Emission              | 2.1053 / 24.238(a)         | PASS    |

Date of Testing: August 20, 2019 ~ September 5, 2019

Note: PASS: The EUT complies with the essential requirements in the standard.

FAIL: The EUT does not comply with the essential requirements in the standard.

All indications of Pass/Fail in this report are opinions expressed by TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.

**There is no test for BG95-M3 in this report(Report No.:R2003A0152-R2).All test values duplicated from the BG95-M3 report (Report No. : R1907A0446-R2). The detailed product change description please refers to the *Statement letter*.**



## 1. Test Laboratory

### 1.1. Notes of the test report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

### 1.2. Test facility

#### **FCC (Designation number: CN1179, Test Firm Registration Number: 446626)**

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

#### **A2LA (Certificate Number: 3857.01)**

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

### 1.3. Testing Location

Company: TA Technology (Shanghai) Co., Ltd.  
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong  
City: Shanghai  
Post code: 201201  
Country: P. R. China  
Contact: Xu Kai  
Telephone: +86-021-50791141/2/3  
Fax: +86-021-50791141/2/3-8000  
Website: <http://www.ta-shanghai.com>  
E-mail: [xukai@ta-shanghai.com](mailto:xukai@ta-shanghai.com)

## 2. General Description of Equipment under Test

### Client Information

|                      |   |
|----------------------|---|
| Applicant            | Quectel Wireless Solutions Co., Ltd   |
| Applicant address    | Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, China 200233 |
| Manufacturer         | Quectel Wireless Solutions Co., Ltd   |
| Manufacturer address | Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, China 200233 |

### General information

| EUT Description  |   |             |             |
|--|---|-------------|-------------|
| Model  | BG95-M3   |             |             |
| IMEI   | 864475040001736   |             |             |
| Hardware Version   | R2.1  |             |             |
| Software Version   | BG95MR3LAR02A03   |             |             |
| Power Supply   | External power supply   |             |             |
| Antenna Type   | The EUT don't have standard Antenna, The Antenna used for testing in this report is the after-market accessory (Dipole Antenna) |             |             |
| Antenna Gain   | GSM 1900:1.6dBi<br>LTE Band 2:1.6dBi<br>LTE Band 25:1.7dBi  |             |             |
| Test Mode(s)   | GSM1900; LTE Band 2/25;   |             |             |
| Test Modulation  | (GSM)GMSK,8PSK; (LTE)QPSK,16QAM   |             |             |
| GPRS Multislot Class   | 33  |             |             |
| EGPRS Multislot Class  | 33  |             |             |
| LTE Category   | M1  |             |             |
| Maximum E.I.R.P  | GSM 1900:   | 31.43dBm    |             |
|  | LTE Band 2:   | 22.52dBm    |             |
|  | LTE Band 25:  | 22.21dBm    |             |
| Rated Power Supply Voltage   | 3.8V  |             |             |
| Extreme Voltage  | Minimum: 3.3V    Maximum: 4.3V  |             |             |
| Extreme Temperature  | Lowest: -40°C    Highest: +85°C   |             |             |
| Frequency Range(s)   | Band  | Tx (MHz)    | Rx (MHz)    |
|  | GSM1900   | 1850 ~ 1910 | 1930 ~ 1990 |
|  | LTE Band 2  | 1850 ~ 1910 | 1930 ~ 1990 |
|  | LTE Band 25   | 1850 ~ 1915 | 1930 ~ 1995 |
| Note: 1. The EUT is sent from the applicant to TA and the information of the EUT is declared by the applicant. |   |             |             |

### 3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**Test standards:**

**FCC CFR 47 Part 24E (2019)**

**ANSI C63.26 (2015)**

**Reference standard:**

**FCC CFR47 Part 2 (2019)**

**KDB 971168 D01 Power Meas License Digital Systems v03r01**

## 4. Test Configuration

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes. EUT stand-up position (Z axis), lie-down position (X, Y axis). Receiver antenna polarization (horizontal and vertical), the worst emission was found in position (X axis, horizontal polarization) and the worst case was recorded.

All mode and data rates and positions and RB size and modulations were investigated.

Subsequently, only the worst case emissions are reported.

The following testing in GSM/ LTE is set based on the maximum RF Output Power.

Test modes are chosen to be reported as the worst case configuration below:

| Test items                              | Modes/Modulation                         |
|---|--|
|   | GSM 1900                                 |
| RF power output                         | GSM<br>GPRS<br>EGPRS                     |
| Effective Isotropic Radiated power      | GSM<br>GPRS(1Tx slot)<br>EGPRS(1Tx slot) |
| Occupied Bandwidth                      | GSM<br>GPRS(1Tx slot)<br>EGPRS(1Tx slot) |
| Band Edge Compliance                    | GSM<br>GPRS(1Tx slot)<br>EGPRS(1Tx slot) |
| Peak-to-Average Power Ratio             | GSM<br>GPRS(1Tx slot)<br>EGPRS(1Tx slot) |
| Frequency Stability                     | GSM<br>GPRS(1Tx slot)<br>EGPRS(1Tx slot) |
| Spurious Emissions at Antenna Terminals | GSM                                      |
| Radiates Spurious Emission              | GSM                                      |



Test modes are chosen to be reported as the worst case configuration below for LTE Band 2/25:

| Test items                         | Modes   | Bandwidth (MHz) |   |   |    |    |    | Modulation |       | RB |     |      | Test Channel |   |   |
|------------------------------------|---|-----------------|---|---|----|----|----|------------|-------|----|-----|------|--------------|---|---|
|                                    |   | 1.4             | 3 | 5 | 10 | 15 | 20 | QPSK       | 16QAM | 1  | 50% | 100% | L            | M | H |
| RF power output                    | LTE 2   | O               | O | O | O  | O  | O  | O          | O     | O  | O   | O    | O            | O | O |
|                                    | LTE 25  | O               | O | O | O  | O  | O  | O          | O     | O  | O   | O    | O            | O | O |
| Effective Isotropic Radiated power | LTE 2   | O               | O | O | O  | O  | O  | O          | O     | O  | O   | O    | O            | O | O |
|                                    | LTE 25  | O               | O | O | O  | O  | O  | O          | O     | O  | O   | O    | O            | O | O |
| Occupied Bandwidth                 | LTE 2   | O               | O | O | O  | O  | O  | O          | O     | -  | -   | O    | -            | O | - |
|                                    | LTE 25  | O               | O | O | O  | O  | O  | O          | O     | -  | -   | O    | -            | O | - |
| Band Edge Compliance               | LTE 2   | O               | O | O | O  | O  | O  | O          | O     | O  | -   | O    | O            | - | O |
|                                    | LTE 25  | O               | O | O | O  | O  | O  | O          | O     | O  | -   | O    | O            | - | O |
| Peak-to-Average Power Ratio        | LTE 2   | O               | O | O | O  | O  | O  | O          | O     | -  | -   | O    | -            | O | - |
|                                    | LTE 25  | O               | O | O | O  | O  | O  | O          | O     | -  | -   | O    | -            | O | - |
| Frequency Stability                | LTE 2   | O               | O | O | O  | O  | O  | O          | O     | O  | O   | O    | O            | O | O |
|                                    | LTE 25  | O               | O | O | O  | O  | O  | O          | O     | O  | O   | O    | O            | O | O |
| Conducted Spurious Emissions       | LTE 2   | O               | O | O | O  | O  | O  | O          | -     | O  | -   | -    | O            | O | O |
|                                    | LTE 25  | O               | O | O | O  | O  | O  | O          | -     | O  | -   | -    | O            | O | O |
| Radiates Spurious Emission         | LTE 2   | O               | - | O | -  | -  | O  | O          | -     | O  | -   | -    | O            | O | O |
|                                    | LTE 25  | O               | - | O | -  | -  | O  | O          | -     | O  | -   | -    | O            | O | O |
| Note                               | 1. The mark "O" means that this configuration is chosen for testing.<br>2. The mark "-" means that this configuration is not testing. |                 |   |   |    |    |    |            |       |    |     |      |              |   |   |



## 5. Test Case Results

### 5.1.RF Power Output


#### Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 23°C ~25°C  | 45%~50%           | 101.5kPa |

#### Methods of Measurement

During the process of the testing, The EUT is controlled by the Base Station Simulator to ensure max power transmission and proper modulation.

#### Test Setup

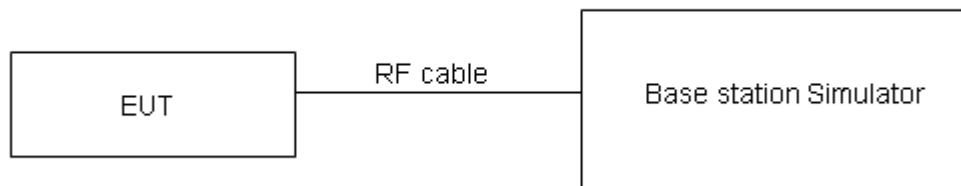

The loss between RF output port of the EUT and the input port of the tester has been taken into consideration.

#### Limits

No specific RF power output requirements in part 2.1046.

#### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 0.4$  dB.

**Test Results**

| GSM 1900             |          | Conducted Power(dBm) |             |             |
|----------------------|----------|----------------------|-------------|-------------|
|                      |          | Channel 512          | Channel 661 | Channel 810 |
|                      |          | 1850.2(MHz)          | 1880(MHz)   | 1909.8(MHz) |
| GSM                  | Results  | 29.83                | 29.74       | 29.71       |
| GPRS/EGPRS<br>(GMSK) | 1TXslot  | 29.80                | 29.66       | 29.59       |
|                      | 2TXslots | 28.56                | 28.71       | 28.50       |
|                      | 3TXslots | 27.90                | 27.53       | 27.22       |
|                      | 4TXslots | 26.26                | 25.87       | 25.56       |
| EGPRS<br>(8PSK)      | 1TXslot  | 25.23                | 25.17       | 24.78       |
|                      | 2TXslots | 24.20                | 24.04       | 24.01       |
|                      | 3TXslots | 22.45                | 22.01       | 21.94       |
|                      | 4TXslots | 21.23                | 21.02       | 20.74       |

| LTE Band 2 | Channel/<br>Frequency(MHz) | Index | RB#<br>RBstart | Conducted Power (dBm) |       |
|------------|----------------------------|-------|----------------|-----------------------|-------|
|            |                            |       |                | QPSK                  | 16QAM |
| 1.4MHz     | 18607/1850.7               | 0     | 1#0            | 20.92                 | 19.64 |
|            |                            | 0     | 6#0            | 18.71                 | 19.02 |
|            | 18900/1880                 | 0     | 1#0            | 19.87                 | 19.61 |
|            |                            | 0     | 6#0            | 18.38                 | 18.19 |
|            | 19193/1909.3               | 0     | 1#5            | 20.17                 | 19.08 |
|            |                            | 0     | 6#0            | 18.35                 | 18.68 |
| 3MHz       | 18615/1851.5               | 0     | 1#0            | 20.38                 | 19.68 |
|            |                            | 0     | 6#0            | 18.78                 | 18.91 |
|            | 18900/1880                 | 0     | 1#0            | 20.21                 | 19.27 |
|            |                            | 0     | 6#0            | 18.45                 | 18.73 |
|            | 19185/1908.5               | 1     | 1#5            | 20.02                 | 19.11 |
|            |                            | 1     | 6#0            | 18.41                 | 18.74 |
| 5MHz       | 18625/1852.5               | 0     | 1#0            | 20.08                 | 20.29 |
|            |                            | 0     | 6#0            | 19.47                 | 19.66 |
|            | 18900/1880                 | 0     | 1#0            | 20.05                 | 19.71 |
|            |                            | 0     | 6#0            | 19.24                 | 19.38 |
|            | 19175/1907.5               | 0     | 1#5            | 19.68                 | 20.02 |
|            |                            | 3     | 6#0            | 19.28                 | 19.40 |
| 10MHz      | 18650/1855                 | 3     | 1#0            | 19.92                 | 20.19 |
|            |                            | 0     | 4#0            | 20.07                 | 19.83 |
|            | 18900/1880                 | 0     | 1#0            | 19.96                 | 19.53 |
|            |                            | 0     | 4#0            | 19.78                 | 20.11 |
|            | 19150/1905                 | 4     | 1#5            | 19.88                 | 19.51 |
|            |                            | 7     | 4#2            | 20.01                 | 20.14 |



|       |              |    |     |       |       |
|-------|--------------|----|-----|-------|-------|
| 15MHz | 18675/1857.5 | 3  | 1#0 | 20.22 | 20.11 |
|       |              | 0  | 6#0 | 20.13 | 20.26 |
|       | 18900/1880   | 0  | 1#0 | 20.14 | 19.81 |
|       |              | 0  | 6#0 | 20.05 | 19.95 |
|       | 19125/1902.5 | 8  | 1#5 | 19.95 | 19.51 |
|       |              | 11 | 6#0 | 19.88 | 19.87 |
| 20MHz | 18700/1860   | 3  | 1#0 | 20.17 | 19.96 |
|       |              | 0  | 6#0 | 20.08 | 20.01 |
|       | 18900/1880   | 0  | 1#0 | 19.90 | 19.59 |
|       |              | 0  | 6#0 | 19.86 | 19.97 |
|       | 19100/1900   | 12 | 1#5 | 19.76 | 19.34 |
|       |              | 15 | 6#0 | 19.83 | 20.04 |

| LTE Band 25 | Channel/<br>Frequency(MHz) | Index | RB#<br>RBstart | Conducted Power (dBm) |       |
|-------------|----------------------------|-------|----------------|-----------------------|-------|
|             |                            |       |                | QPSK                  | 16QAM |
| 1.4MHz      | 26047/1850.7               | 0     | 1#0            | 20.51                 | 19.47 |
|             |                            | 0     | 6#0            | 18.36                 | 18.71 |
|             | 26365/1882.5               | 0     | 1#0            | 19.61                 | 19.32 |
|             |                            | 0     | 6#0            | 17.95                 | 17.89 |
|             | 26683/1914.3               | 0     | 1#5            | 19.55                 | 19.71 |
|             |                            | 0     | 6#0            | 18.31                 | 18.13 |
| 3MHz        | 26055/1851.5               | 0     | 1#0            | 19.90                 | 19.63 |
|             |                            | 0     | 6#0            | 18.24                 | 18.21 |
|             | 26365/1882.5               | 0     | 1#0            | 19.68                 | 19.44 |
|             |                            | 0     | 6#0            | 18.13                 | 18.02 |
|             | 26675/1913.5               | 1     | 1#5            | 19.72                 | 19.58 |
|             |                            | 1     | 6#0            | 18.21                 | 18.19 |
| 5MHz        | 26065/1852.5               | 0     | 1#0            | 19.89                 | 20.03 |
|             |                            | 0     | 6#0            | 19.31                 | 19.45 |
|             | 26365/1882.5               | 0     | 1#0            | 19.67                 | 19.96 |
|             |                            | 0     | 6#0            | 19.13                 | 19.21 |
|             | 26665/1912.5               | 0     | 1#5            | 19.66                 | 19.88 |
|             |                            | 3     | 6#0            | 19.33                 | 19.48 |
| 10MHz       | 26090/1855                 | 3     | 1#0            | 19.78                 | 19.93 |
|             |                            | 0     | 4#0            | 19.79                 | 19.63 |
|             | 26365/1882.5               | 0     | 1#0            | 19.68                 | 19.98 |
|             |                            | 0     | 4#0            | 19.67                 | 19.47 |
|             | 26640/1910                 | 4     | 1#5            | 19.64                 | 19.94 |
|             |                            | 7     | 4#2            | 19.78                 | 19.52 |
| 15MHz       | 26115/1857.5               | 3     | 1#0            | 19.88                 | 19.97 |
|             |                            | 0     | 6#0            | 19.81                 | 19.91 |
|             | 26365/1882.5               | 0     | 1#0            | 19.71                 | 19.98 |
|             |                            | 0     | 6#0            | 19.75                 | 19.84 |



|       |              |    |     |       |       |
|-------|--------------|----|-----|-------|-------|
|       | 26615/1907.5 | 8  | 1#5 | 19.68 | 19.89 |
|       |              | 11 | 6#0 | 19.78 | 19.89 |
| 20MHz | 26140/1860   | 3  | 1#0 | 19.71 | 19.94 |
|       |              | 0  | 6#0 | 19.87 | 19.93 |
|       | 26365/1882.5 | 0  | 1#0 | 19.67 | 19.85 |
|       |              | 0  | 6#0 | 19.76 | 19.84 |
|       | 26590/1905   | 12 | 1#5 | 19.73 | 19.87 |
|       |              | 15 | 6#0 | 19.81 | 19.93 |

## 5.2. Effective Isotropic Radiated Power

### Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 23°C ~25°C  | 45%~50%           | 101.5kPa |


### Methods of Measurement

The testing follows FCC KDB 971168 v03r01 Section 5.8 and ANSI C63.26 (2015).

- Connect the equipment as illustrated. Mount the equipment with the manufacturer specified antenna in a vertical orientation on a manufacturer specified mounting surface located on a non-conducting rotating platform of a RF anechoic chamber (preferred) or a standard radiation site.
- Key the transmitter, then rotate the EUT 360° azimuthally and record spectrum analyzer power level (LVL) measurements at angular increments that are sufficiently small to permit resolution of all peaks. If a standard radiation test site is used, raise and lower the test antenna to obtain a maximum reading at each angular increment. (Note: several batteries may be needed to offset the effect of battery voltage droop, which should not exceed 5% of the manufactured specified battery voltage during transmission).
- Replace the transmitter under test with a vertically polarized half-wave dipole (or an antenna whose gain is known relative to an ideal half-wave dipole). The center of the antenna should be at the same location as the center of the antenna under test.
- Connect the antenna to a signal generator with a known output power and record the path loss (in dB) as LOSS. If a standard radiation test site is used, raise and lower the test antenna to obtain a maximum reading.  $LOSS = \text{Generator Output Power (dBm)} - \text{Analyzer reading (dBm)}$
- Determine the effective radiated output power at each angular position from the readings in steps b) and d) using the following equation:  $ERP \text{ (dBm)} = LVL \text{ (dBm)} + LOSS \text{ (dB)}$
- The maximum ERP is the maximum value determined in the preceding step.
- When calculating ERP, in addition to knowing the antenna radiation and matching characteristics, it is necessary to know the loss values of all elements (e.g. transmission line attenuation, mismatches, filters, combiners) interposed between the point where transmitter output power is measured, and the point where power is applied to the antenna. ERP can then be calculated as follows:  
 $EIRP \text{ (dBm)} = \text{Output Power (dBm)} - \text{Losses (dB)} + \text{Antenna Gain (dBi)}$   
where: dBd refers to gain relative to an ideal dipole.  
 $EIRP \text{ (dBm)} = ERP \text{ (dBm)} + 2.15 \text{ (dB)}$

The RB allocation refers to section 5.1, using the maximum output power configuration.

## Test setup

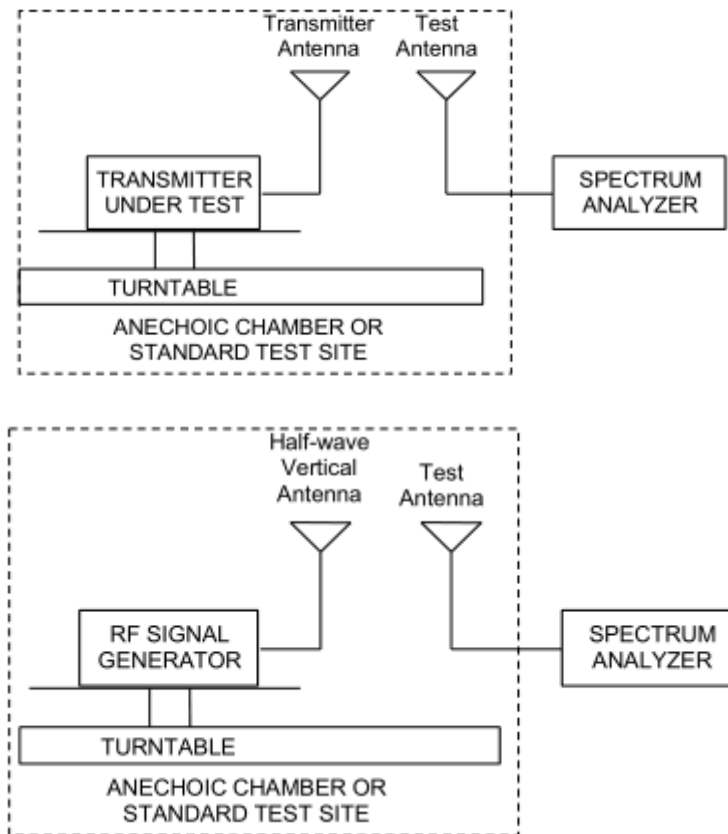

## Limits

Rule Part 24.232(c) Mobile and portable stations are limited to 2 watts EIRP.

Rule Part 24.232(e) Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.

|       |                             |
|-------|-----------------------------|
| Limit | $\leq 2 \text{ W}$ (33 dBm) |
|-------|-----------------------------|

## Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 1.19 \text{ dB}$

## Test Results:

The measurement is performed for both of horizontal and vertical antenna Polarization, and only the data of worst mode is recorded in this report.

| Mode              | Channel | Frequency (MHz) | Polarization | EIRP (dBm) | Limit (dBm) | Conclusion |
|-------------------|---------|-----------------|--------------|------------|-------------|------------|
| <b>GSM 1900</b>   | Low     | 1850.2          | Horizontal   | 31.43      | 33          | Pass       |
|                   | Mid     | 1880            | Horizontal   | 31.34      | 33          | Pass       |
|                   | High    | 1909.8          | Horizontal   | 31.31      | 33          | Pass       |
| <b>GPRS 1900</b>  | Low     | 1850.2          | Horizontal   | 31.40      | 33          | Pass       |
|                   | Mid     | 1880            | Horizontal   | 31.26      | 33          | Pass       |
|                   | High    | 1909.8          | Horizontal   | 31.19      | 33          | Pass       |
| <b>EGPRS 1900</b> | Low     | 1850.2          | Horizontal   | 26.83      | 33          | Pass       |
|                   | Mid     | 1880            | Horizontal   | 26.77      | 33          | Pass       |
|                   | High    | 1909.8          | Horizontal   | 26.38      | 33          | Pass       |

| LTE Band 2 |                            |       |                |           |       |                |            |
|------------|----------------------------|-------|----------------|-----------|-------|----------------|------------|
| Band2      | Channel/<br>Frequency(MHz) | Index | RB#<br>RBstart | EIRP(dBm) |       | Limit<br>(dBm) | Conclusion |
|            |                            |       |                | QPSK      | 16QAM |                |            |
| 1.4MHz     | 18607/1850.7               | 0     | 1#0            | 22.52     | 21.24 | 33             | Pass       |
|            |                            | 0     | 6#0            | 20.31     | 20.62 | 33             | Pass       |
|            | 18900/1880                 | 0     | 1#0            | 21.47     | 21.21 | 33             | Pass       |
|            |                            | 0     | 6#0            | 19.98     | 19.79 | 33             | Pass       |
|            | 19193/1909.3               | 0     | 1#5            | 21.77     | 20.68 | 33             | Pass       |
|            |                            | 0     | 6#0            | 19.95     | 20.28 | 33             | Pass       |
| 3MHz       | 18615/1851.5               | 0     | 1#0            | 21.98     | 21.28 | 33             | Pass       |
|            |                            | 0     | 6#0            | 20.38     | 20.51 | 33             | Pass       |
|            | 18900/1880                 | 0     | 1#0            | 21.81     | 20.87 | 33             | Pass       |
|            |                            | 0     | 6#0            | 20.05     | 20.33 | 33             | Pass       |
|            | 19185/1908.5               | 1     | 1#5            | 21.62     | 20.71 | 33             | Pass       |
|            |                            | 1     | 6#0            | 20.01     | 20.34 | 33             | Pass       |
| 5MHz       | 18625/1852.5               | 0     | 1#0            | 21.68     | 21.89 | 33             | Pass       |
|            |                            | 0     | 6#0            | 21.07     | 21.26 | 33             | Pass       |
|            | 18900/1880                 | 0     | 1#0            | 21.65     | 21.31 | 33             | Pass       |
|            |                            | 0     | 6#0            | 20.84     | 20.98 | 33             | Pass       |
|            | 19175/1907.5               | 0     | 1#5            | 21.28     | 21.62 | 33             | Pass       |
|            |                            | 3     | 6#0            | 20.88     | 21.00 | 33             | Pass       |
| 10MHz      | 18650/1855                 | 3     | 1#0            | 21.52     | 21.79 | 33             | Pass       |
|            |                            | 0     | 4#0            | 21.67     | 21.43 | 33             | Pass       |
|            | 18900/1880                 | 0     | 1#0            | 21.56     | 21.13 | 33             | Pass       |
|            |                            | 0     | 4#0            | 21.38     | 21.71 | 33             | Pass       |



|       |              |    |     |       |       |    |      |
|-------|--------------|----|-----|-------|-------|----|------|
|       | 19150/1905   | 4  | 1#5 | 21.48 | 21.11 | 33 | Pass |
|       |              | 7  | 4#2 | 21.61 | 21.74 | 33 | Pass |
| 15MHz | 18675/1857.5 | 3  | 1#0 | 21.82 | 21.71 | 33 | Pass |
|       |              | 0  | 6#0 | 21.73 | 21.86 | 33 | Pass |
|       | 18900/1880   | 0  | 1#0 | 21.74 | 21.41 | 33 | Pass |
|       |              | 0  | 6#0 | 21.65 | 21.55 | 33 | Pass |
|       | 19125/1902.5 | 8  | 1#5 | 21.55 | 21.11 | 33 | Pass |
|       |              | 11 | 6#0 | 21.48 | 21.47 | 33 | Pass |
| 20MHz | 18700/1860   | 3  | 1#0 | 21.77 | 21.56 | 33 | Pass |
|       |              | 0  | 6#0 | 21.68 | 21.61 | 33 | Pass |
|       | 18900/1880   | 0  | 1#0 | 21.50 | 21.19 | 33 | Pass |
|       |              | 0  | 6#0 | 21.46 | 21.57 | 33 | Pass |
|       | 19100/1900   | 12 | 1#5 | 21.36 | 20.94 | 33 | Pass |
|       |              | 15 | 6#0 | 21.43 | 21.64 | 33 | Pass |

| LTE Band 25 |                            |       |                |           |       |                |            |
|-------------|----------------------------|-------|----------------|-----------|-------|----------------|------------|
| Band2       | Channel/<br>Frequency(MHz) | Index | RB#<br>RBstart | EIRP(dBm) |       | Limit<br>(dBm) | Conclusion |
|             |                            |       |                | QPSK      | 16QAM |                |            |
| 1.4MHz      | 26047/1850.7               | 0     | 1#0            | 22.21     | 21.17 | 33             | Pass       |
|             |                            | 0     | 6#0            | 20.06     | 20.41 | 33             | Pass       |
|             | 26365/1882.5               | 0     | 1#0            | 21.31     | 21.02 | 33             | Pass       |
|             |                            | 0     | 6#0            | 19.65     | 19.59 | 33             | Pass       |
|             | 26683/1914.3               | 0     | 1#5            | 21.25     | 21.41 | 33             | Pass       |
|             |                            | 0     | 6#0            | 20.01     | 19.83 | 33             | Pass       |
| 3MHz        | 26055/1851.5               | 0     | 1#0            | 21.60     | 21.33 | 33             | Pass       |
|             |                            | 0     | 6#0            | 19.94     | 19.91 | 33             | Pass       |
|             | 26365/1882.5               | 0     | 1#0            | 21.38     | 21.14 | 33             | Pass       |
|             |                            | 0     | 6#0            | 19.83     | 19.72 | 33             | Pass       |
|             | 26675/1913.5               | 1     | 1#5            | 21.42     | 21.28 | 33             | Pass       |
|             |                            | 1     | 6#0            | 19.91     | 19.89 | 33             | Pass       |
| 5MHz        | 26065/1852.5               | 0     | 1#0            | 21.59     | 21.73 | 33             | Pass       |
|             |                            | 0     | 6#0            | 21.01     | 21.15 | 33             | Pass       |
|             | 26365/1882.5               | 0     | 1#0            | 21.37     | 21.66 | 33             | Pass       |
|             |                            | 0     | 6#0            | 20.83     | 20.91 | 33             | Pass       |
|             | 26665/1912.5               | 0     | 1#5            | 21.36     | 21.58 | 33             | Pass       |
|             |                            | 3     | 6#0            | 21.03     | 21.18 | 33             | Pass       |
| 10MHz       | 26090/1855                 | 3     | 1#0            | 21.48     | 21.63 | 33             | Pass       |
|             |                            | 0     | 4#0            | 21.49     | 21.33 | 33             | Pass       |
|             | 26365/1882.5               | 0     | 1#0            | 21.38     | 21.68 | 33             | Pass       |
|             |                            | 0     | 4#0            | 21.37     | 21.17 | 33             | Pass       |
|             | 26640/1910                 | 4     | 1#5            | 21.34     | 21.64 | 33             | Pass       |





|       |              |    |     |       |       |    |      |
|-------|--------------|----|-----|-------|-------|----|------|
|       |              | 7  | 4#2 | 21.48 | 21.22 | 33 | Pass |
| 15MHz | 26115/1857.5 | 3  | 1#0 | 21.58 | 21.67 | 33 | Pass |
|       |              | 0  | 6#0 | 21.51 | 21.61 | 33 | Pass |
|       | 26365/1882.5 | 0  | 1#0 | 21.41 | 21.68 | 33 | Pass |
|       |              | 0  | 6#0 | 21.45 | 21.54 | 33 | Pass |
|       | 26615/1907.5 | 8  | 1#5 | 21.38 | 21.59 | 33 | Pass |
|       |              | 11 | 6#0 | 21.48 | 21.59 | 33 | Pass |
| 20MHz | 26140/1860   | 3  | 1#0 | 21.41 | 21.64 | 33 | Pass |
|       |              | 0  | 6#0 | 21.57 | 21.63 | 33 | Pass |
|       | 26365/1882.5 | 0  | 1#0 | 21.37 | 21.55 | 33 | Pass |
|       |              | 0  | 6#0 | 21.46 | 21.54 | 33 | Pass |
|       | 26590/1905   | 12 | 1#5 | 21.43 | 21.57 | 33 | Pass |
|       |              | 15 | 6#0 | 21.51 | 21.63 | 33 | Pass |

### 5.3.Occupied Bandwidth

#### Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 23°C ~25°C  | 45%~50%           | 101.5kPa |

#### Method of Measurement


The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The occupied bandwidth is measured using spectrum analyzer.

RBW is set to 3kHz, VBW is set to 10kHz for GSM 1900,

RBW is set to 51kHz, VBW is set to 160kHz for LTE Band 2/25

99% power and -26dBc occupied bandwidths are recorded. Spectrum analyzer plots are included on the following pages.

#### Test Setup

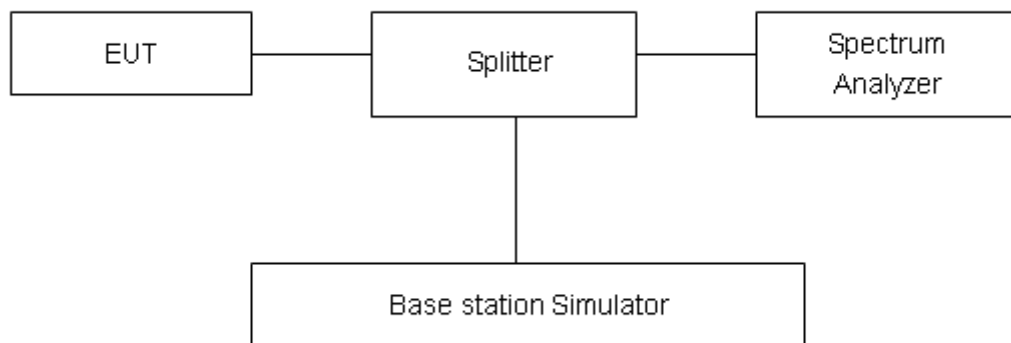

#### Limits

No specific occupied bandwidth requirements in part 2.1049.

#### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 624\text{Hz}$ .

## Test Result

| Mode               | Channel | Frequency (MHz) | 99% Power Bandwidth (MHz) | -26dBc Bandwidth(MHz) |
|--------------------|---------|-----------------|---------------------------|-----------------------|
| GSM 1900 (GMSK)    | 512     | 1850.2          | 0.24588                   | 0.2997                |
|                    | 661     | 1880.0          | 0.24074                   | 0.2996                |
|                    | 810     | 1909.8          | 0.24657                   | 0.3002                |
| GPRS 1900 (GMSK)   | 512     | 1850.2          | 0.24343                   | 0.3139                |
|                    | 661     | 1880.0          | 0.24206                   | 0.305                 |
|                    | 810     | 1909.8          | 0.24476                   | 0.3112                |
| EGPRS 1900 (8-PSK) | 512     | 1850.2          | 0.24864                   | 0.3152                |
|                    | 661     | 1880.0          | 0.24666                   | 0.3106                |
|                    | 810     | 1909.8          | 0.24646                   | 0.3178                |

| Mode  | Bandwidth | Modulation | Channel/<br>Frequency(MHz) | RB  | Index | Bandwidth(MHz) |        |
|-------|-----------|------------|----------------------------|-----|-------|----------------|--------|
|       |           |            |                            |     |       | 99% Power      | -26dBc |
| Band2 | 1.4MHz    | QPSK       | 18900/1880                 | 6#0 | 0     | 1.1068         | 1.361  |
|       |           | 16QAM      | 18900/1880                 | 6#0 | 0     | 0.9417         | 1.167  |
|       | 3MHz      | QPSK       | 18900/1880                 | 6#0 | 0     | 1.1172         | 1.453  |
|       |           | 16QAM      | 18900/1880                 | 6#0 | 0     | 0.9577         | 1.432  |
|       | 5MHz      | QPSK       | 18900/1880                 | 6#0 | 0     | 1.1239         | 1.363  |
|       |           | 16QAM      | 18900/1880                 | 6#0 | 0     | 0.9488         | 1.183  |
|       | 10MHz     | QPSK       | 18900/1880                 | 6#0 | 0     | 1.1139         | 1.325  |
|       |           | 16QAM      | 18900/1880                 | 6#0 | 0     | 0.9723         | 1.212  |
|       | 15MHz     | QPSK       | 18900/1880                 | 6#0 | 0     | 1.1262         | 1.349  |
|       |           | 16QAM      | 18900/1880                 | 6#0 | 0     | 0.9697         | 1.253  |
|       | 20MHz     | QPSK       | 18900/1880                 | 6#0 | 0     | 1.1323         | 1.355  |
|       |           | 16QAM      | 18900/1880                 | 6#0 | 0     | 0.965          | 1.247  |


| Mode   | Bandwidth | Modulation | Channel/<br>Frequency(MHz) | RB  | Index | Bandwidth(MHz) |        |
|--------|-----------|------------|----------------------------|-----|-------|----------------|--------|
|        |           |            |                            |     |       | 99% Power      | -26dBc |
| Band25 | 1.4MHz    | QPSK       | 26365/1882.5               | 6#0 | 0     | 1.1056         | 1.359  |
|        |           | 16QAM      | 26365/1882.5               | 6#0 | 0     | 0.9446         | 1.162  |
|        | 3MHz      | QPSK       | 26365/1882.5               | 6#0 | 0     | 1.1135         | 1.327  |
|        |           | 16QAM      | 26365/1882.5               | 6#0 | 0     | 0.9518         | 1.172  |




|  |       |       |              |     |   |        |        |
|--|-------|-------|--------------|-----|---|--------|--------|
|  | 5MHz  | QPSK  | 26365/1882.5 | 6#0 | 0 | 1.1132 | 1.33   |
|  |       | 16QAM | 26365/1882.5 | 6#0 | 0 | 0.9514 | 1.1216 |
|  | 10MHz | QPSK  | 26365/1882.5 | 6#0 | 0 | 1.1223 | 1.334  |
|  |       | 16QAM | 26365/1882.5 | 6#0 | 0 | 0.966  | 1.222  |
|  | 15MHz | QPSK  | 26365/1882.5 | 6#0 | 0 | 1.1283 | 1.375  |
|  |       | 16QAM | 26365/1882.5 | 6#0 | 0 | 0.9671 | 1.243  |
|  | 20MHz | QPSK  | 26365/1882.5 | 6#0 | 0 | 1.124  | 1.369  |
|  |       | 16QAM | 26365/1882.5 | 6#0 | 0 | 0.9653 | 1.255  |




## GSM1900 GSM CH-Low

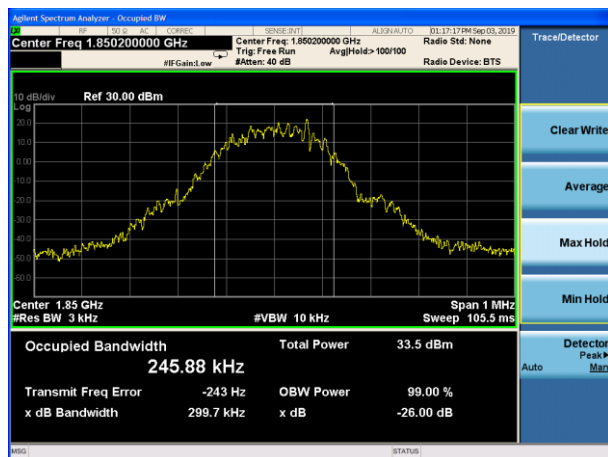


## GSM1900 GPRS CH-Low

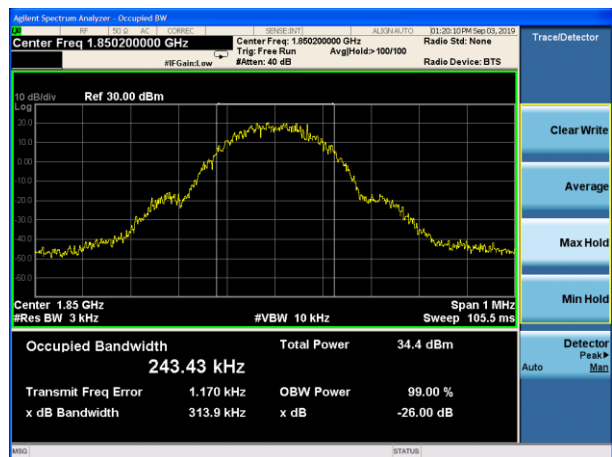


## GSM 1900 GSM CH-Middle

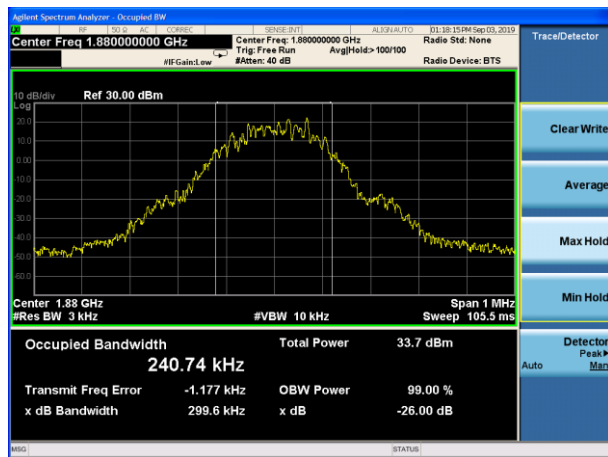


## GSM 1900 GPRS CH-Middle

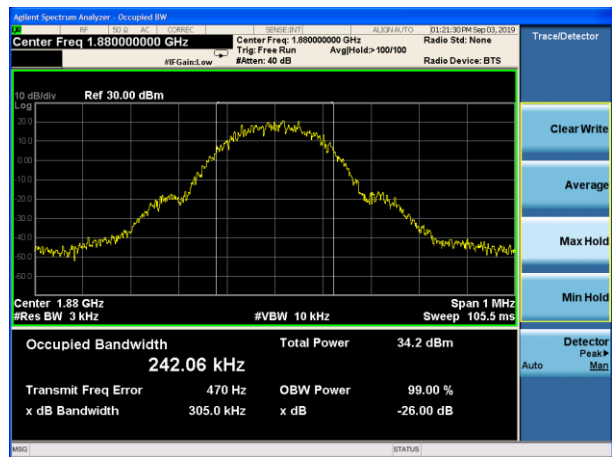

## GSM 1900 GSM CH-High

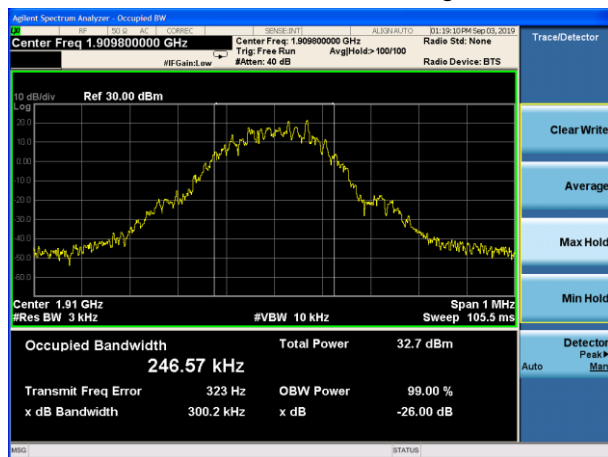


## GSM 1900 GPRS CH-High

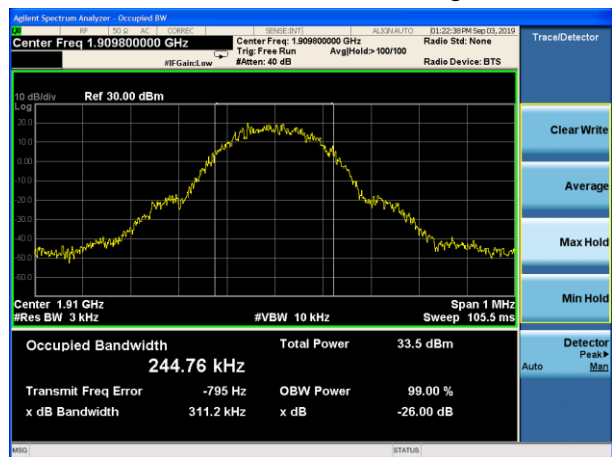





## GSM1900 EGPRS CH-Low

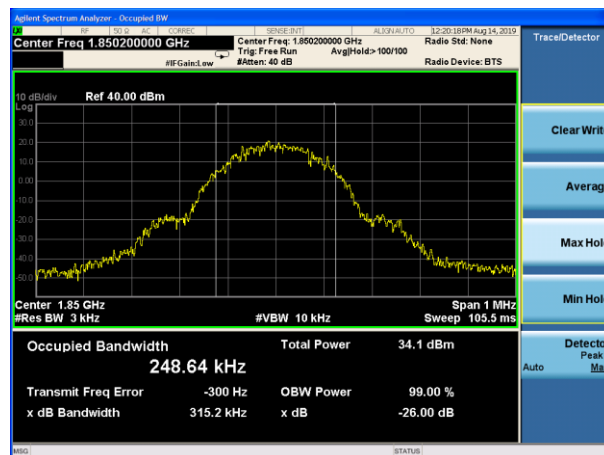

## GSM 1900 EGPRS CH-Middle

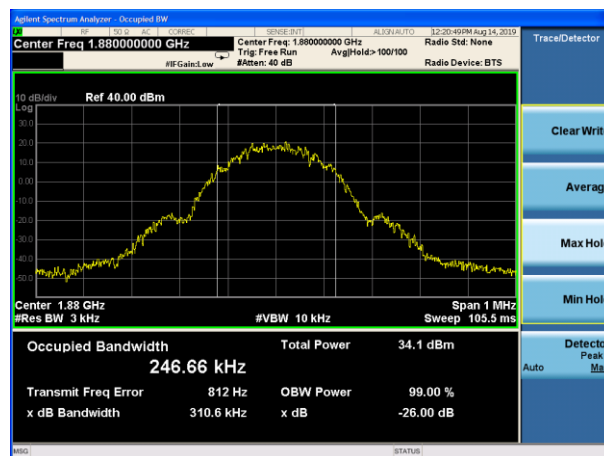


## GSM 1900 EGPRS CH-High

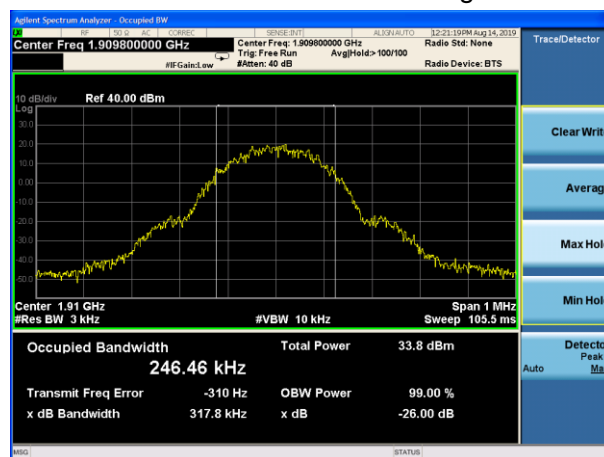





## LTE Band 2 1.4MHz QPSK CH-Middle

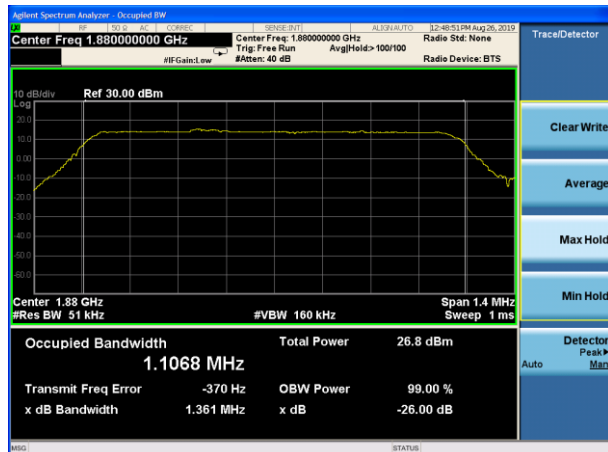


## LTE Band 2 3MHz QPSK CH-Middle

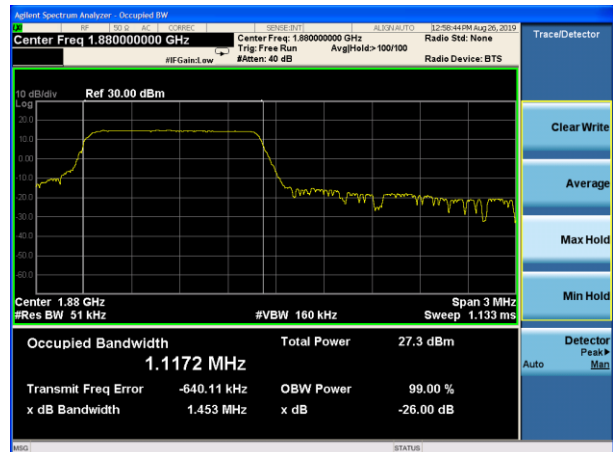


## LTE Band 2 5MHz QPSK CH-Middle

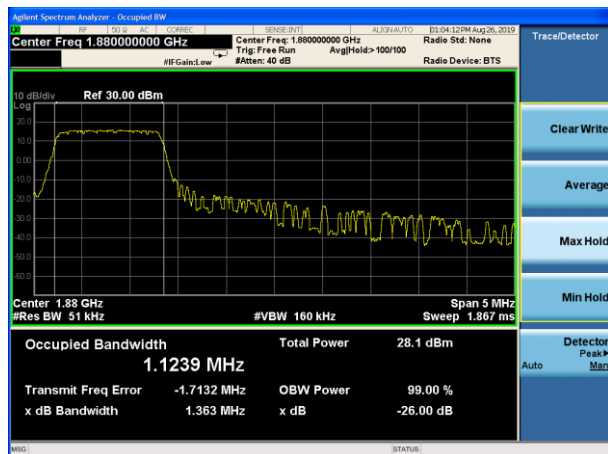


## LTE Band 2 10MHz QPSK CH-Middle

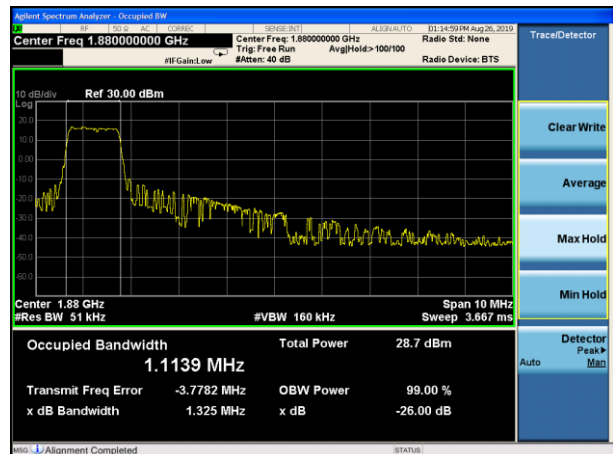

## LTE Band 2 15MHz QPSK CH-Middle

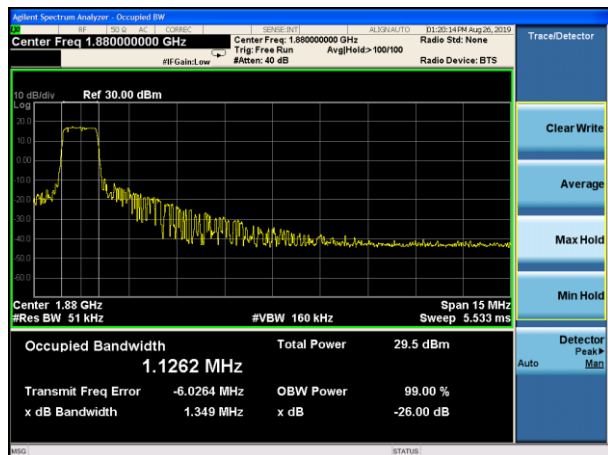


## LTE Band 2 20MHz QPSK CH-Middle

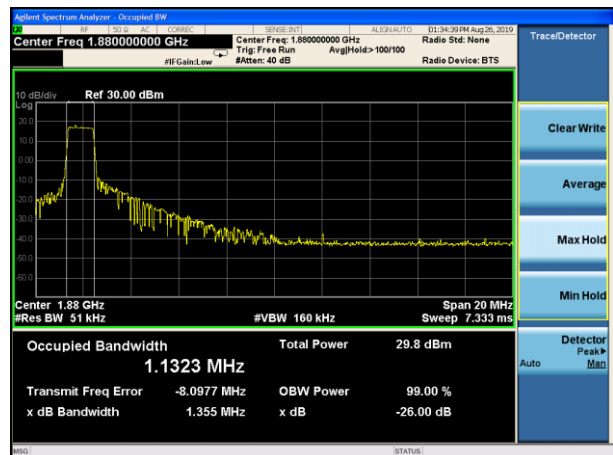





## LTE Band 2 1.4MHz 16QAM CH-Middle

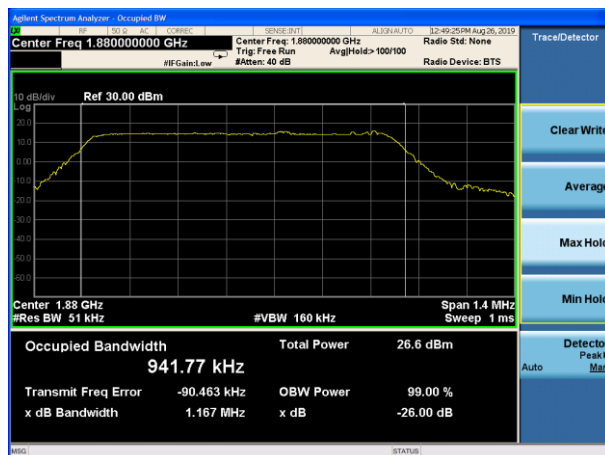


## LTE Band 2 3MHz 16QAM CH-Middle

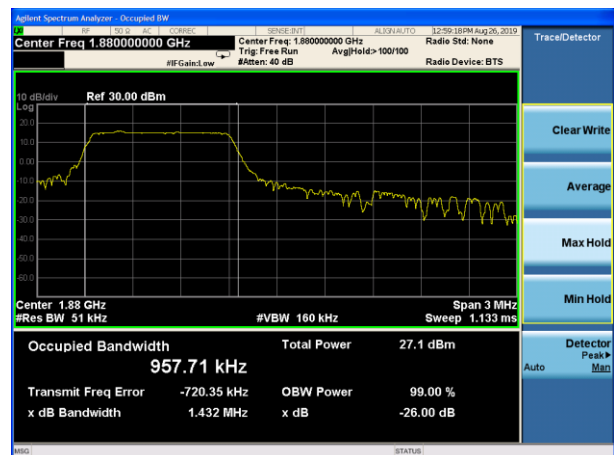


## LTE Band 2 5MHz 16QAM CH-Middle

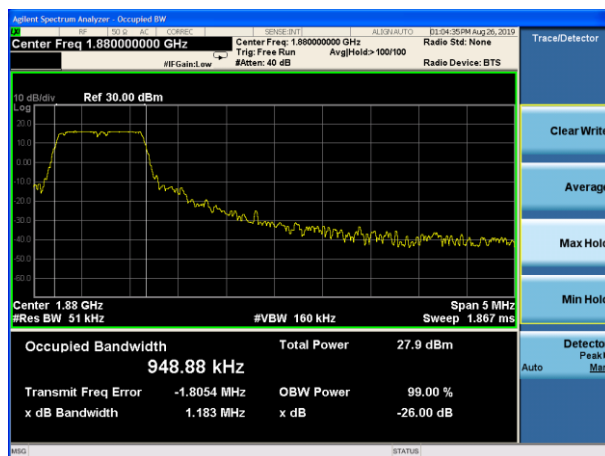


## LTE Band 2 10MHz 16QAM CH-Middle

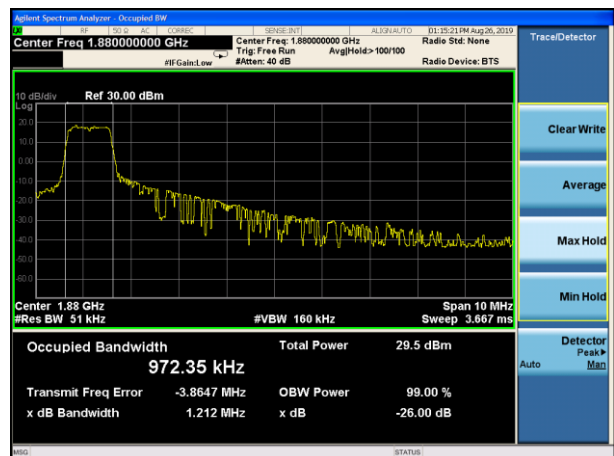

## LTE Band 2 15MHz 16QAM CH-Middle

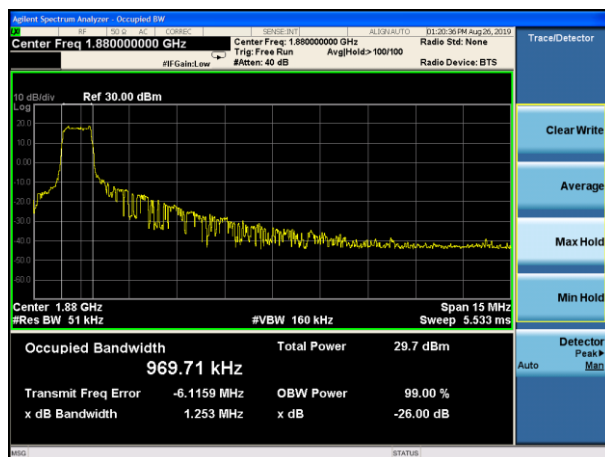


## LTE Band 2 20MHz 16QAM CH-Middle

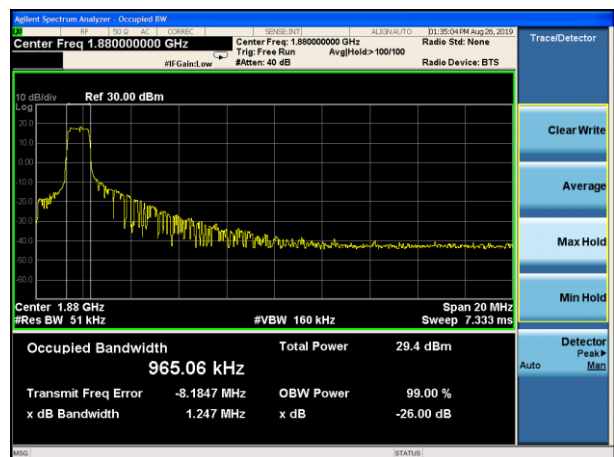







## LTE Band 25 1.4MHz QPSK CH-Middle

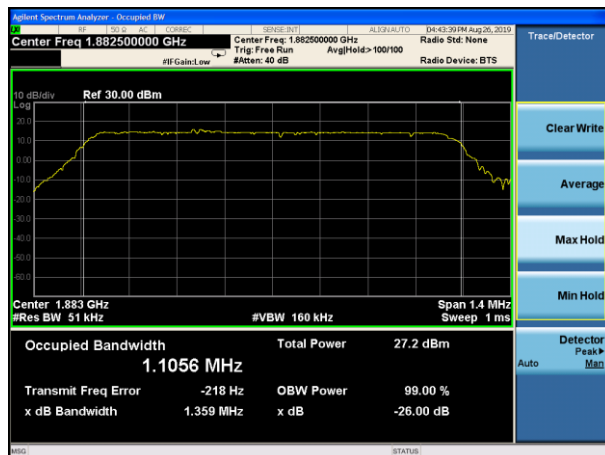


## LTE Band 25 3MHz QPSK CH-Middle

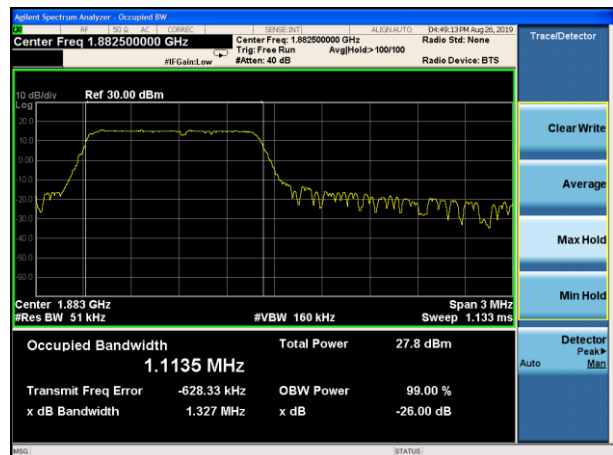


## LTE Band 25 5MHz QPSK CH-Middle

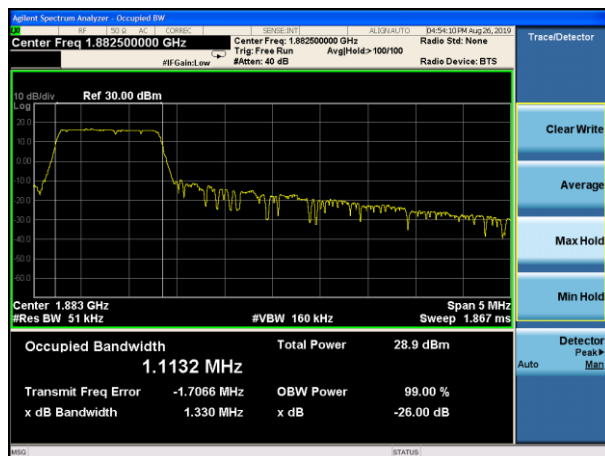


## LTE Band 25 10MHz QPSK CH-Middle

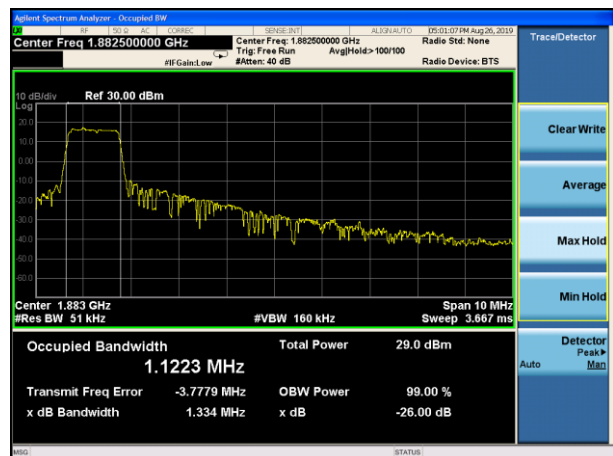

## LTE Band 25 15MHz QPSK CH-Middle

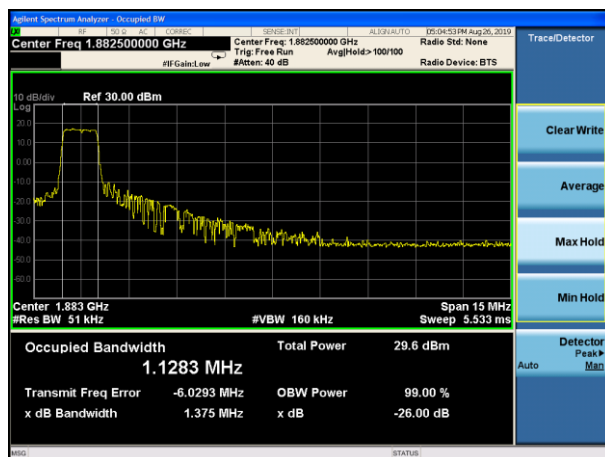


## LTE Band 25 20MHz QPSK CH-Middle

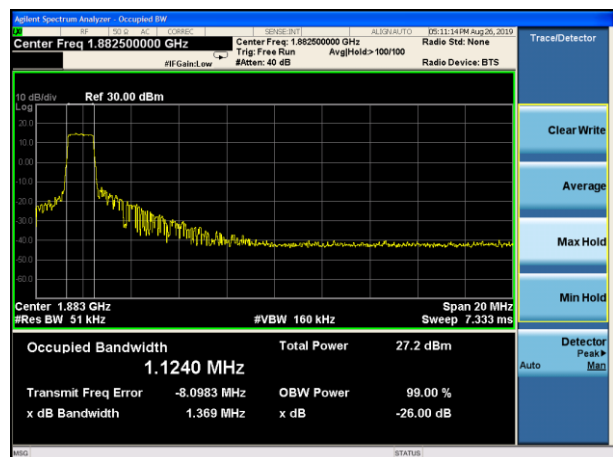





## LTE Band 25 1.4MHz 16QAM CH-Middle

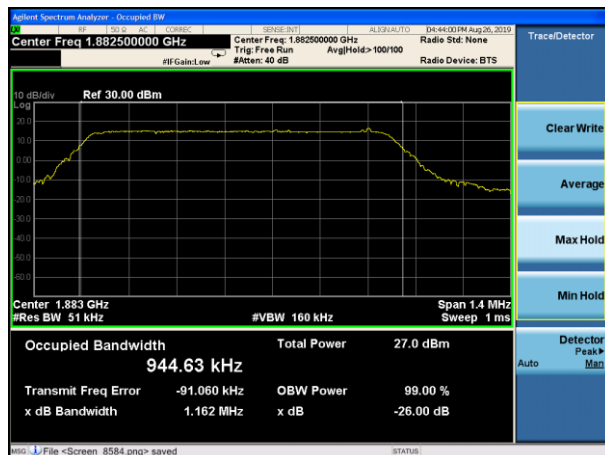


## LTE Band 25 3MHz 16QAM CH-Middle

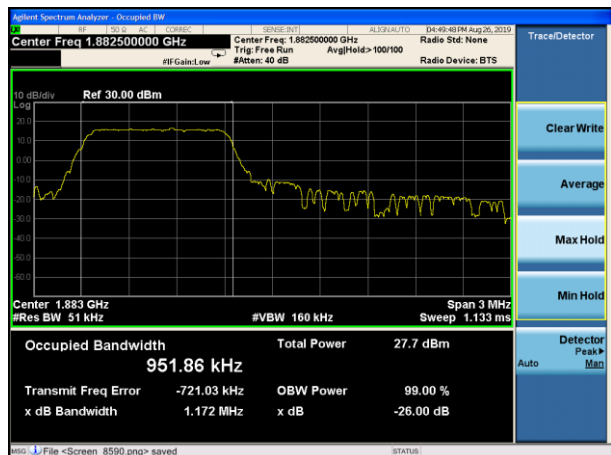


## LTE Band 25 5MHz 16QAM CH-Middle

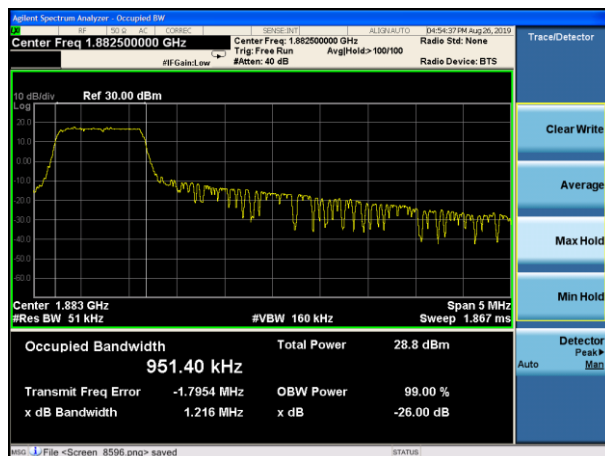


## LTE Band 25 10MHz 16QAM CH-Middle

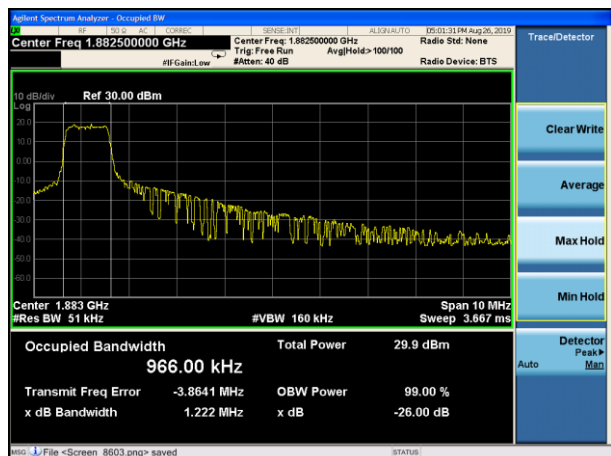

## LTE Band 25 15MHz 16QAM CH-Middle

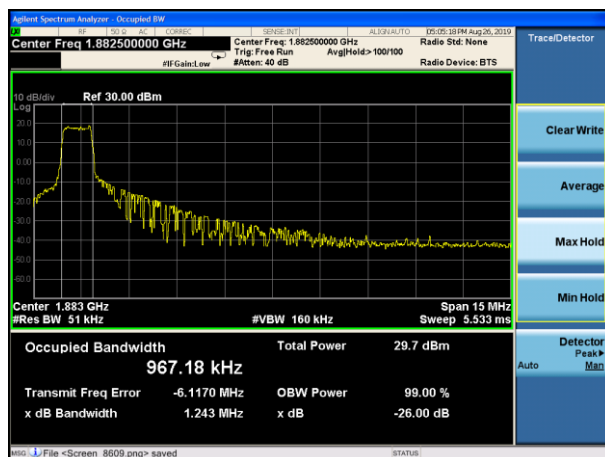

## LTE Band 25 20MHz 16QAM CH-Middle

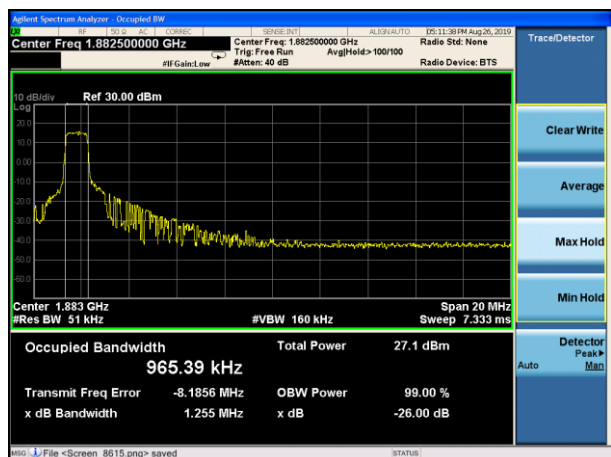

## 5.4. Band Edge Compliance


### Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 23°C ~25°C  | 45%~50%           | 101.5kPa |

### Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The band edge of the lowest and highest channels were measured. The Average detector is used and RBW is set to 3kHz, VBW is set to 10kHz for GSM 1900, RBW is set to 51kHz, VBW is set to 160kHz for LTE Band 2/25. Spectrum analyzer plots are included on the following pages.

### Test Setup

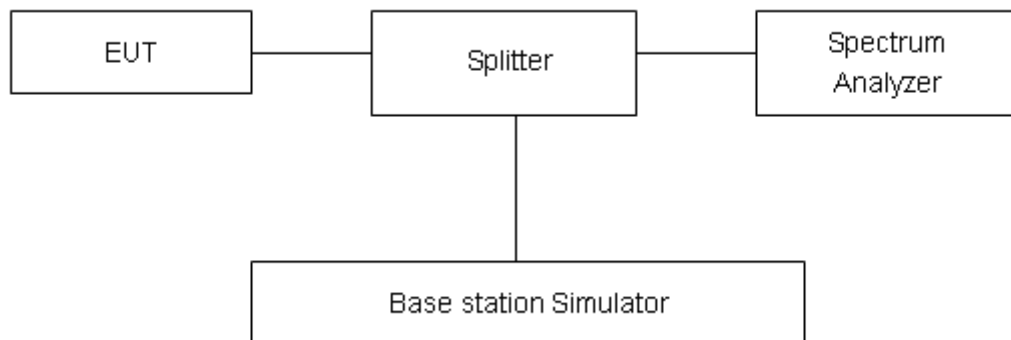

### Limits

Rule Part 24.238(a) specifies that “on any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log_{10} (P)$  dB.”

| Limit | -13 dBm |
|-------|---------|
|-------|---------|


### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ ,  $U=0.684$ dB.




## Test Result:


GSM1900 GSM CH-Low

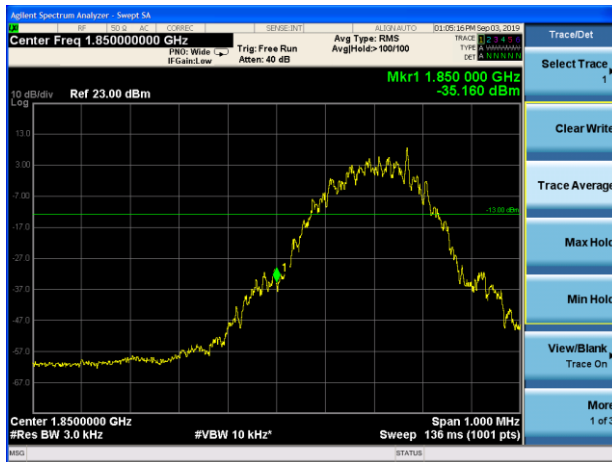


GSM 1900 GSM CH-High

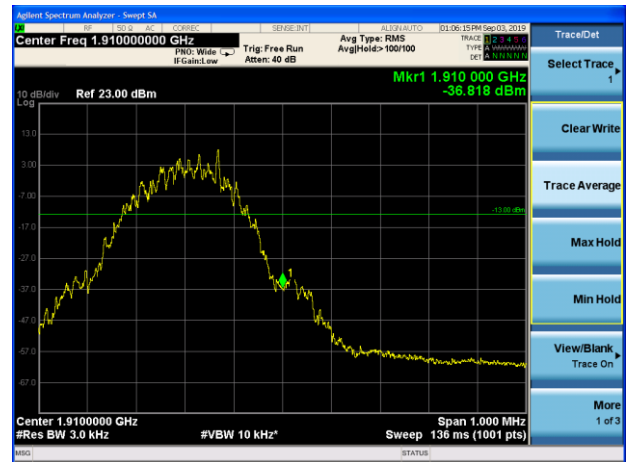


GSM1900 GPRS CH-Low

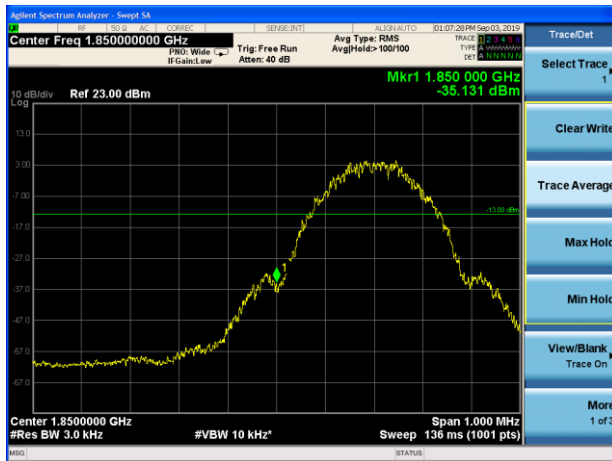

GSM 1900 GPRS CH-High

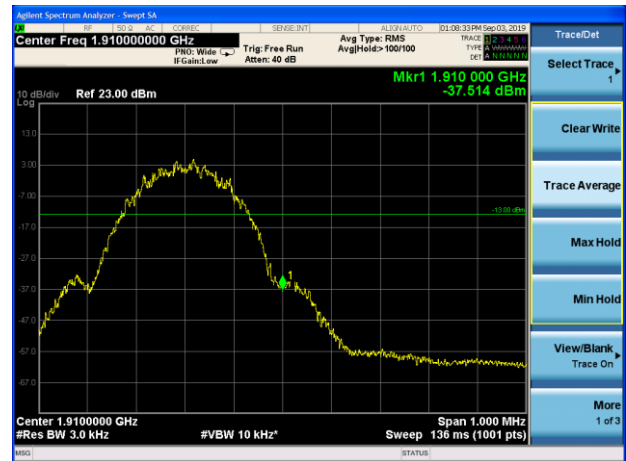

GSM1900 EGPRS CH-Low

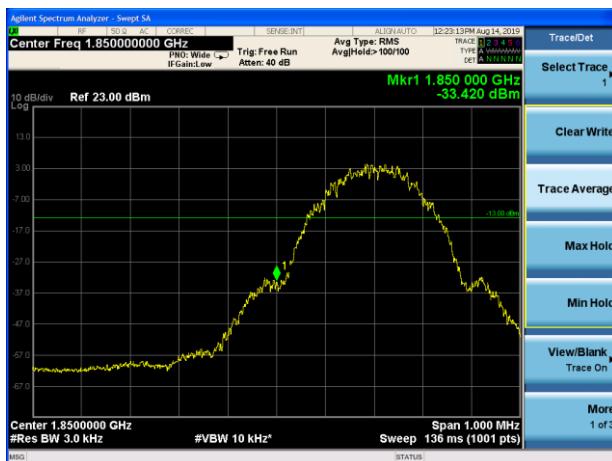

GSM 1900 EGPRS CH-High

