



RF TEST REPORT

Applicant Quectel Wireless Solutions Co., Ltd
FCC ID XMR201911SC600WF
Product Smart Module
Brand Quectel
Model SC600T-WF, SC600Y-WF
Marketing Quectel SC600T-WF, Quectel SC600Y-WF
Report No. R1910A0590-R2
Issue Date November 18, 2019

TA Technology (Shanghai) Co., Ltd. Tested the above equipment in accordance with the requirements in **FCC CFR47 Part 15C (2018)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Peng Tao

Performed by: Peng Tao

Kai Xu

Approved by: Kai Xu

TA Technology (Shanghai) Co., Ltd.

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000



TABLE OF CONTENT

- 1. Test Laboratory 4
 - 1.1. Notes of the test report..... 4
 - 1.2. Testing Location..... 4
- 2. General Description of Equipment under Test..... 5
 - 2.1. Applicant and Manufacturer Information..... 5
 - 2.2. General information..... 5
- 3. Applied Standards 6
- 4. Test Configuration 7
- 5. Test Case Results 8
 - 5.1. Maximum output power 8
 - 5.2. Unwanted Emission 11
 - 5.3. Conducted Emission 49
- 6. Main Test Instruments..... 52



Summary of measurement results

| Number | Test Case | Clause in FCC rules | Verdict |
|--|--------------------------------|-------------------------|---------|
| 1 | Maximum conducted output power | 15.247(b)(3) | PASS |
| 2 | Unwanted Emissions | 15.247(d),15.205,15.209 | PASS |
| 3 | Conducted Emissions | 15.207 | PASS |
| Date of Testing:October 16, 2019 ~November 1, 2019 | | | |

Only Conducted power , Unwanted Emissions and Conducted Emissions were tested for SC600T-WF, SC600Y-WF in this report. Other conducted test items refer to the SC600Y-NA ,SC600T-NA Module report (Report No. : HR/2019/5000602 and HR/2019/5000605).



1. Test Laboratory

1.1. Notes of the test report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein .Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2. Testing Location

Company: TA Technology (Shanghai) Co., Ltd.
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <http://www.ta-shanghai.com>
E-mail: xukai@ta-shanghai.com

2. General Description of Equipment under Test

2.1. Applicant and Manufacturer Information

| | |
|----------------------|---|
| Applicant | Quectel Wireless Solutions Co., Ltd |
| Applicant address | Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, China 200233 |
| Manufacturer | Quectel Wireless Solutions Co., Ltd |
| Manufacturer address | Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, China 200233 |

2.2. General information

| EUT Description | |
|---|---|
| Model | SC600T-WF, SC600Y-WF |
| SN | P1A19IJ58000023 |
| Hardware Version | R1.0 |
| Software Version | SC600YWFPAR05A04 |
| Power Supply | External Power Supply |
| Antenna Type | The EUT don't have standard Adapter and Antenna. The adapter and Antenna used for testing in this report is the after-market accessory. |
| Antenna Gain | BLE:5 dBi WIFI 2.4G: 5 dBi |
| additional beamforming gain | NA |
| Test Mode | Bluetooth V4.2 LE 802.11b 802.11g, 802.11n(HT20/HT40); |
| Modulation Type | BLE :GFSK 802.11b: DSSS; 802.11g/n(HT20/HT40): OFDM |
| Max. Conducted Power | Wi-Fi 2.4G :16.37dBm BLE : 1.86 dBm |
| Operating Frequency Range(s) | 802.11b/g/n(HT20): 2412 ~ 2462 MHz 802.11n(HT40): 2422 ~ 2452 MHz BLE: 2402 ~2480 MHz |
| Note: The information of the EUT is declared by the manufacturer. | |



3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards:

FCC CFR47 Part 15C (2018) Radio Frequency Devices

ANSI C63.10 (2013)

Reference standard:

KDB 558074 D01 15.247 Meas Guidance v05r02

4. Test Configuration

Test Mode

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in lie-down position (X axis) and the loop antenna is vertical, the others are vertical and horizontal. and the worst case was recorded.

In order to find the worst case condition, Pre-tests are needed at the presence of different data rate. Preliminary tests have been done on all the configuration for confirming worst case. Data rate below means worst-case rate of each test item.

Worst-case data rates are shown as following table.

| Band | Data Rate |
|-----------------------|-----------|
| Bluetooth(Low Energy) | 1Mbps |
| 802.11b | 1 Mbps |
| 802.11g | 6 Mbps |
| 802.11n HT20 | MCS0 |
| 802.11n HT40 | MCS0 |

5. Test Case Results

5.1. Maximum output power


Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 23°C ~25°C | 45%~50% | 101.5kPa |

Methods of Measurement

During the process of the testing, The EUT was connected to Average Power meter with a known loss. The EUT is max power transmission with proper modulation. The signal transmission is continuous.

Test Setup



Limits

Rule Part 15.247 (b) (3) specifies that " For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz: 1 Watt."

| | |
|----------------------|--------------|
| Average Output Power | ≤ 1W (30dBm) |
|----------------------|--------------|

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.44$ dB.

Test Results

| Single Antenna Power Index | | | |
|----------------------------|-----|-----|------|
| Packet Type | CH1 | CH6 | CH11 |
| 802.11b | 16 | 16 | 16 |
| 802.11g | 16 | 16 | 16 |
| 802.11n HT20 | 15 | 15 | 15 |
| Packet Type | CH3 | CH6 | CH9 |
| 802.11n HT40 | 14 | 14 | 14 |

| Band | T _{on} (ms) | T _(on+off) (ms) | Duty cycle | Duty cycle correction Factor(dB) |
|------------------------|----------------------|----------------------------|------------|----------------------------------|
| 802.11b | 8.22 | 8.42 | 0.98 | NA |
| 802.11g | 1.37 | 1.57 | 0.87 | 0.59 |
| 802.11n HT20 | 1.27 | 1.48 | 0.86 | 0.65 |
| 802.11n HT40 | 1.28 | 1.48 | 0.87 | 0.63 |
| Bluetooth (Low Energy) | 0.39 | 0.62 | 0.625 | 2.041 |

Note: when Duty cycle>0.98, Duty cycle correction Factor not required.



| Network Standards | Carrier frequency (MHz) | Average Power Measured (dBm) | Average Power with duty factor (dBm) | Limit (dBm) | Conclusion |
|------------------------|-------------------------|------------------------------|--------------------------------------|-------------|------------|
| 802.11b | 2412 | 16.18 | 16.18 | 30 | PASS |
| | 2437 | 16.37 | 16.37 | 30 | PASS |
| | 2462 | 15.91 | 15.91 | 30 | PASS |
| 802.11g | 2412 | 14.53 | 15.12 | 30 | PASS |
| | 2437 | 14.64 | 15.23 | 30 | PASS |
| | 2462 | 14.26 | 14.85 | 30 | PASS |
| 802.11n HT20 | 2412 | 13.74 | 14.39 | 30 | PASS |
| | 2437 | 13.65 | 14.30 | 30 | PASS |
| | 2462 | 13.37 | 14.02 | 30 | PASS |
| 802.11n HT40 | 2422 | 13.52 | 14.15 | 30 | PASS |
| | 2437 | 13.49 | 14.12 | 30 | PASS |
| | 2452 | 12.85 | 13.48 | 30 | PASS |
| Bluetooth (Low Energy) | 2402 | -0.65 | 1.39 | 30 | PASS |
| | 2440 | -0.18 | 1.86 | 30 | PASS |
| | 2480 | -1.53 | 0.51 | 30 | PASS |

Note: Average Power with duty factor = Average Power Measured +Duty cycle correction factor

5.2. Unwanted Emission

Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 23°C ~25°C | 45%~50% | 102.5kPa |

Method of Measurement

The test set-up was made in accordance to the general provisions of ANSI C63.10-2013.

The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna.

The turntable shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna. The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing. Sweep the Restricted Band and the emissions less than 20 dB below the permissible value are reported.

The radiated emissions measurements were made in a typical installation configuration.

Sweep the whole frequency band through the range from 9 kHz to the 10th harmonic of the carrier, and the emissions less than 20 dB below the permissible value are reported.

This method refer to ANSI C63.10-2013.

The procedure for peak unwanted emissions measurements above 1000 MHz is as follows:

I) Peak emission levels are measured by setting the instrument as follows:

- 1) RBW = 1 MHz.
- 2) VBW \geq [3 \times RBW]
- 3) Detector = peak.
- 4) Sweep time = auto.
- 5) Trace mode = max hold.
- 6) Allow sweeps to continue until the trace stabilizes. Note that if the transmission is not continuous, then the time required for the trace to stabilize will increase by a factor of approximately 1 / D, where D is the duty cycle.

II) Average emission levels are measured by setting the instrument as follows:

- a) RBW = 1 MHz.
- b) VBW \geq [3 \times RBW].
- c) Detector = RMS (power averaging), if [span / (# of points in sweep)]RBW / 2. Satisfying this condition can require increasing the number of points in the sweep or reducing the span. If the condition is not satisfied, then the detector mode shall be set to peak.
- d) Averaging type = power (i.e., rms) (As an alternative, the detector and averaging type may be set for linear voltage averaging. Some instruments require linear display mode to use linear voltage



averaging. Log or dB averaging shall not be used.)

e) Sweep time = auto.

f) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, then the number of traces shall be increased by a factor of $1 / D$, where D is the duty cycle. For example, with 50% duty cycle, at least 200 traces shall be averaged. (If a specific emission is demonstrated to be continuous—i.e., 100% duty cycle—then rather than turning ON and OFF with the transmit cycle, at least 100 traces shall be averaged.)

g) If tests are performed with the EUT transmitting at a duty cycle less than 98%, then a correction factor shall be added to the measurement results prior to comparing with the emission limit, to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:

1) If power averaging (rms) mode was used in the preceding step e), then the correction factor is $[10 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 3 dB shall be added to the measured emission levels.


2) If linear voltage averaging mode was used in the preceding step e), then the correction factor is $[20 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 6 dB shall be added to the measured emission levels.

3) If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission.


The test is in transmitting mode.

Test setup


9KHz ~ 30MHz

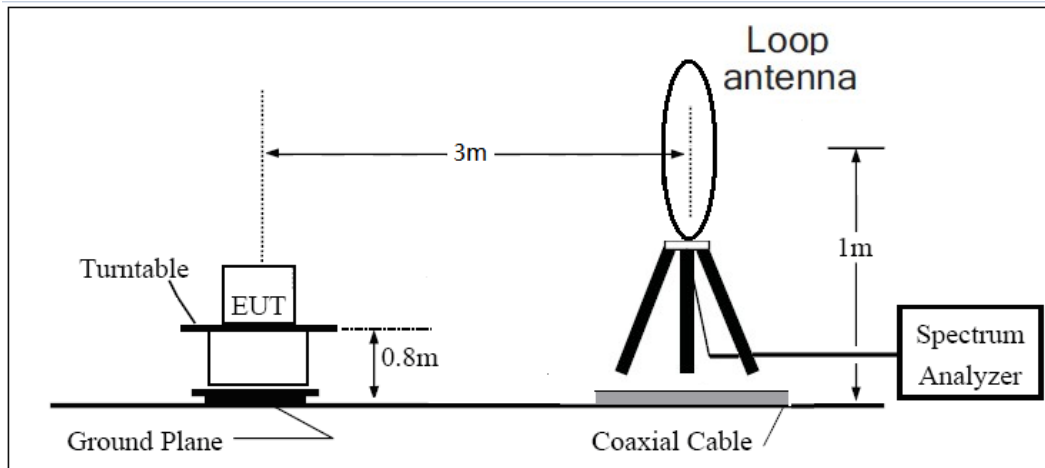

30MHz ~ 1GHz

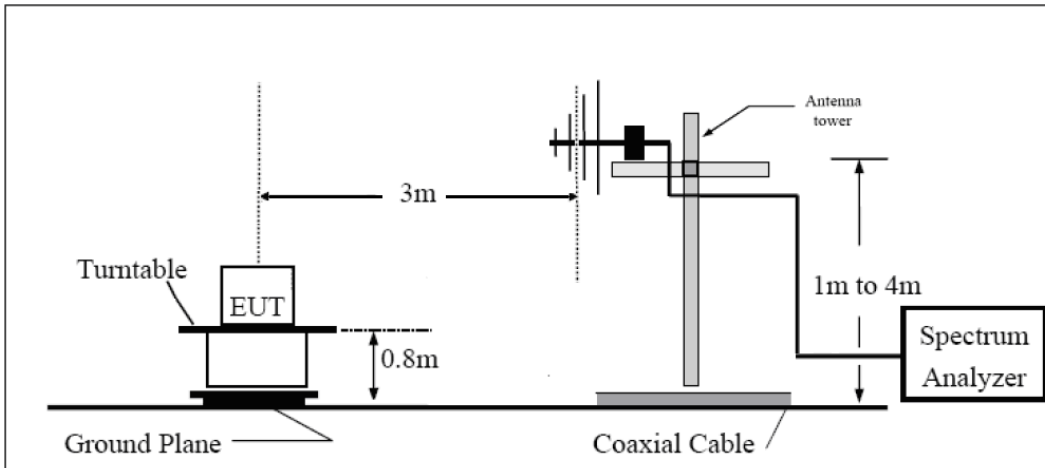

Above 1GHz

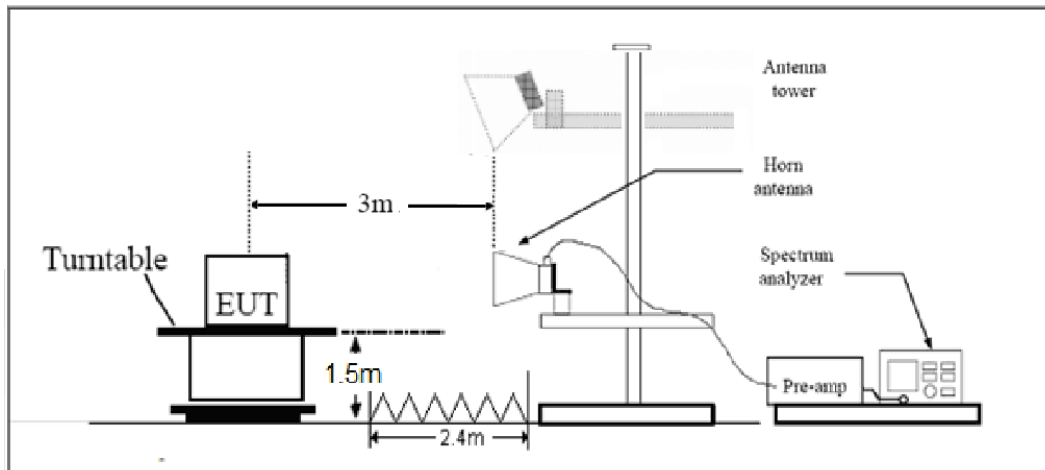

Note: Area side:2.4mX3.6m

**Limits**

Rule Part 15.247(d) specifies that "In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c))."

Limit in restricted band

| Frequency of emission (MHz) | Field strength(uV/m) | Field strength(dBuV/m) |
|-----------------------------|----------------------|------------------------|
| 0.009–0.490 | 2400/F(kHz) | / |
| 0.490–1.705 | 24000/F(kHz) | / |
| 1.705–30.0 | 30 | / |
| 30-88 | 100 | 40 |
| 88-216 | 150 | 43.5 |
| 216-960 | 200 | 46 |
| Above960 | 500 | 54 |

§15.35(b)

There is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.

Peak Limit=74 dBuV/m

Average Limit=54 dBuV/m

Spurious Radiated Emissions are permitted in any of the frequency bands listed below:

| MHz | MHz | MHz | GHz |
|----------------------------|-----------------------|-----------------|------------------|
| 0.090 - 0.110 | 16.42 - 16.423 | 399.9 - 410 | 4.5 - 5.15 |
| ¹ 0.495 - 0.505 | 16.69475 - 16.69525 | 608 - 614 | 5.35 - 5.46 |
| 2.1735 - 2.1905 | 16.80425 - 16.80475 | 960 - 1240 | 7.25 - 7.75 |
| 4.125 - 4.128 | 25.5 - 25.67 | 1300 - 1427 | 8.025 - 8.5 |
| 4.17725 - 4.17775 | 37.5 - 38.25 | 1435 - 1626.5 | 9.0 - 9.2 |
| 4.20725 - 4.20775 | 73 - 74.6 | 1645.5 - 1646.5 | 9.3 - 9.5 |
| 6.215 - 6.218 | 74.8 - 75.2 | 1660 - 1710 | 10.6 - 12.7 |
| 6.26775 - 6.26825 | 108 - 121.94 | 1718.8 - 1722.2 | 13.25 - 13.4 |
| 6.31175 - 6.31225 | 123 - 138 | 2200 - 2300 | 14.47 - 14.5 |
| 8.291 - 8.294 | 149.9 - 150.05 | 2310 - 2390 | 15.35 - 16.2 |
| 8.362 - 8.366 | 156.52475 - 156.52525 | 2483.5 - 2500 | 17.7 - 21.4 |
| 8.37625 - 8.38675 | 156.7 - 156.9 | 2690 - 2900 | 22.01 - 23.12 |
| 8.41425 - 8.41475 | 162.0125 - 167.17 | 3260 - 3267 | 23.6 - 24.0 |
| 12.29 - 12.293 | 167.72 - 173.2 | 3332 - 3339 | 31.2 - 31.8 |
| 12.51975 - 12.52025 | 240 - 285 | 3345.8 - 3358 | 36.43 - 36.5 |
| 12.57675 - 12.57725 | 322 - 335.4 | 3600 - 4400 | (²) |
| 13.36 - 13.41 | | | |


**Measurement Uncertainty**

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.


| Frequency | Uncertainty |
|--------------|-------------|
| 30MHz-200MHz | 4.02 dB |
| 200MHz-1GHz | 3.28 dB |
| 1-18GHz | 3.70 dB |




Test Results:

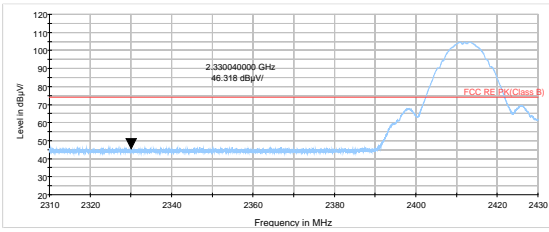


802.11b-Channel 1 Peak

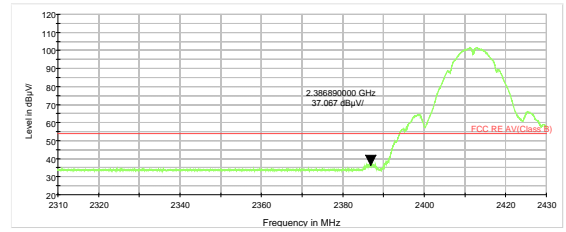


802.11b-Channel 1 Average

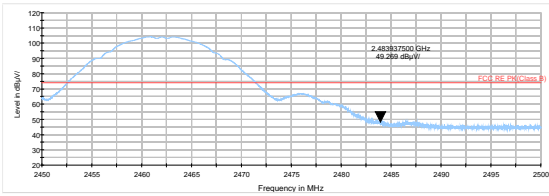


802.11b-Channel 11 Peak

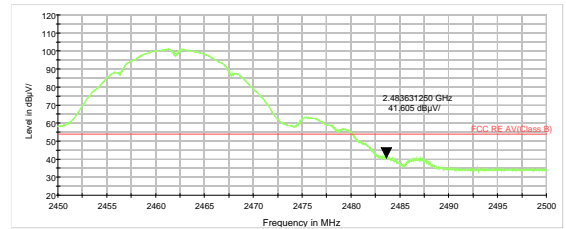


802.11b-Channel 11 Average

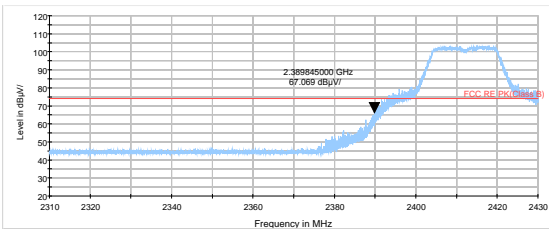


802.11g-Channel 1 Peak

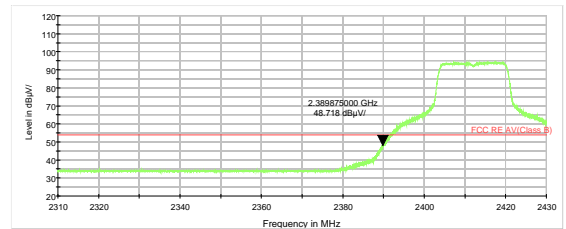


802.11g-Channel 1 Average

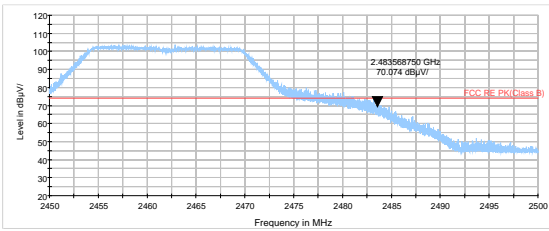


802.11g-Channel 11 Peak

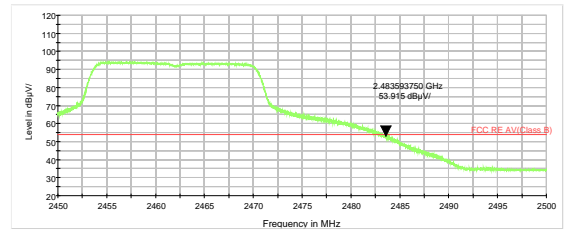


802.11g-Channel 11 Average

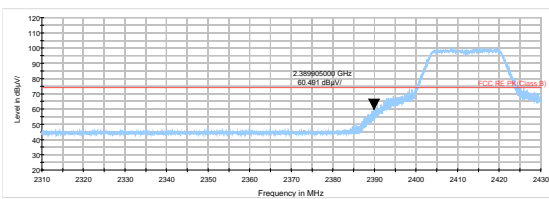


802.11n HT20 -Channel 1 Peak

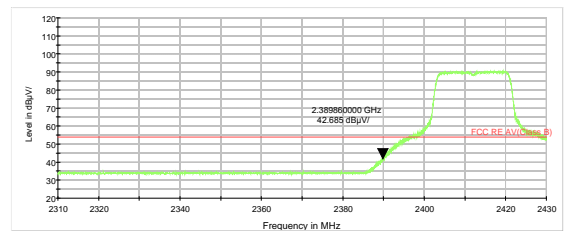


802.11n HT20 -Channel 1 Average

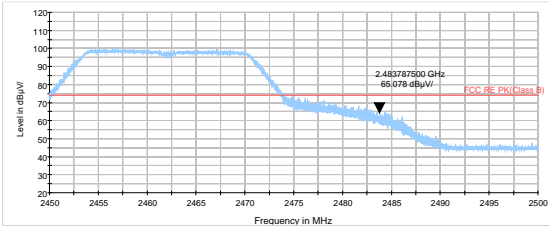


802.11n HT20 -Channel 11 Peak

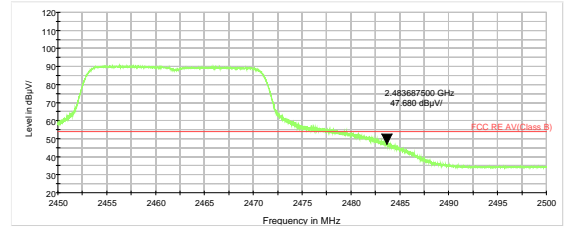


802.11n HT20 -Channel 11 Average

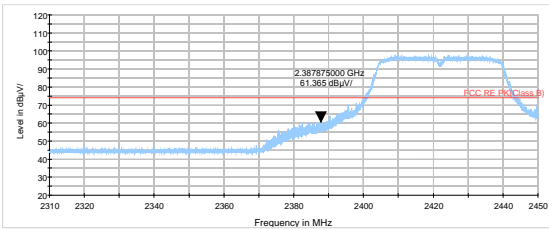


802.11n HT40 -Channel 3 Peak

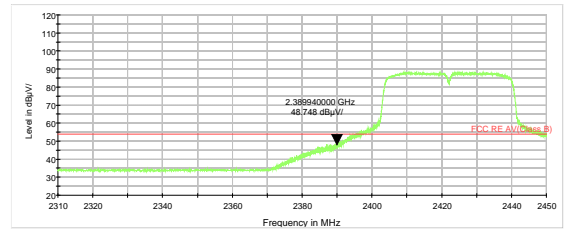


802.11n HT40 -Channel 3 Average

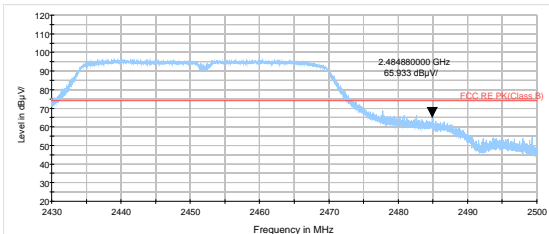


802.11n HT40 -Channel 9 Peak

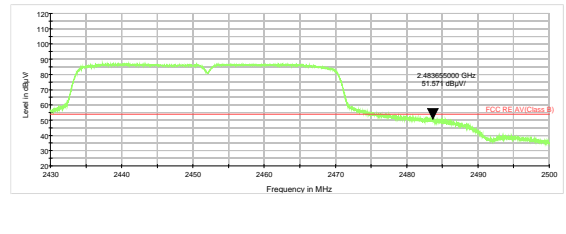


802.11n HT40 -Channel 9 Average

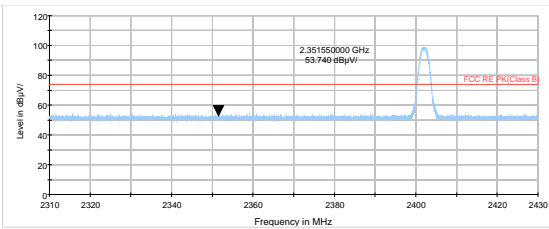


BLE Channel 0 Peak

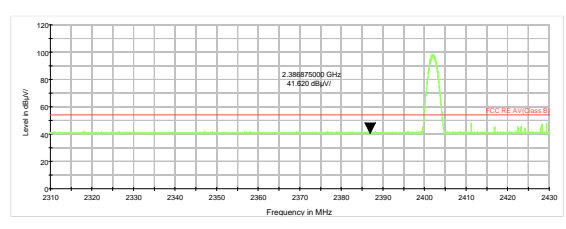

BLE Channel 0 Average

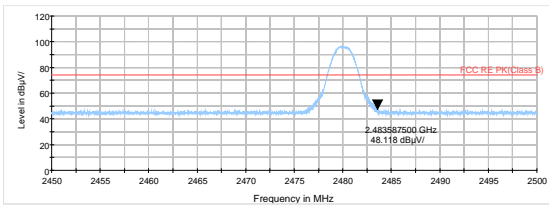

BLE Channel 39 Peak

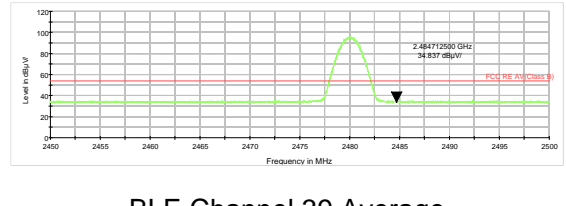


BLE Channel 39 Average

**Result of RE****Test result**

Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the Emissions in the frequency band 30MHz-1GMHz and 1GHz-18GHz are more than 20dB below the limit are not reported.

The following graphs display the maximum values of horizontal and vertical by software. For above 1GHz, Blue trace uses the peak detection, Green trace uses the average detection.

During the test, the Radiates Emission from 30MHz to 1GHz was performed in all modes with all channels, 802.11n (HT20) CH1 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.

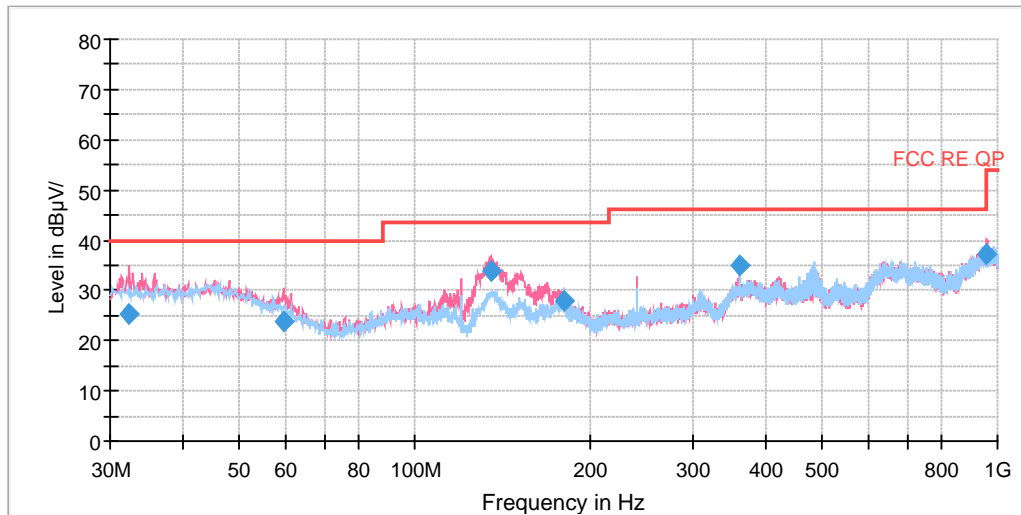Continuous TX mode:


Radiates Emission from 30MHz to 1GHz

| Frequency (MHz) | Quasi-Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------------|-------------|--------------|---------------|---------------------|-------------|----------------|
| 32.302991 | 25.47 | 100.0 | V | 210.0 | 3.8 | 14.53 | 40.00 |
| 59.475091 | 23.75 | 100.0 | V | 332.0 | -1.6 | 16.25 | 40.00 |
| 134.983100 | 33.70 | 100.0 | V | 153.0 | -6.9 | 9.80 | 43.50 |
| 180.016285 | 28.03 | 100.0 | V | 247.0 | -7.2 | 15.47 | 43.50 |
| 360.022500 | 35.15 | 100.0 | V | 11.0 | 1.5 | 10.85 | 46.00 |
| 960.068250 | 37.34 | 184.0 | V | 292.0 | 8.7 | 16.66 | 54.00 |


Remark: 1. Correction Factor = Antenna factor+ Insertion loss(cable loss+amplifier gain)

2. Margin = Limit – Quasi-Peak

802.11b CH1

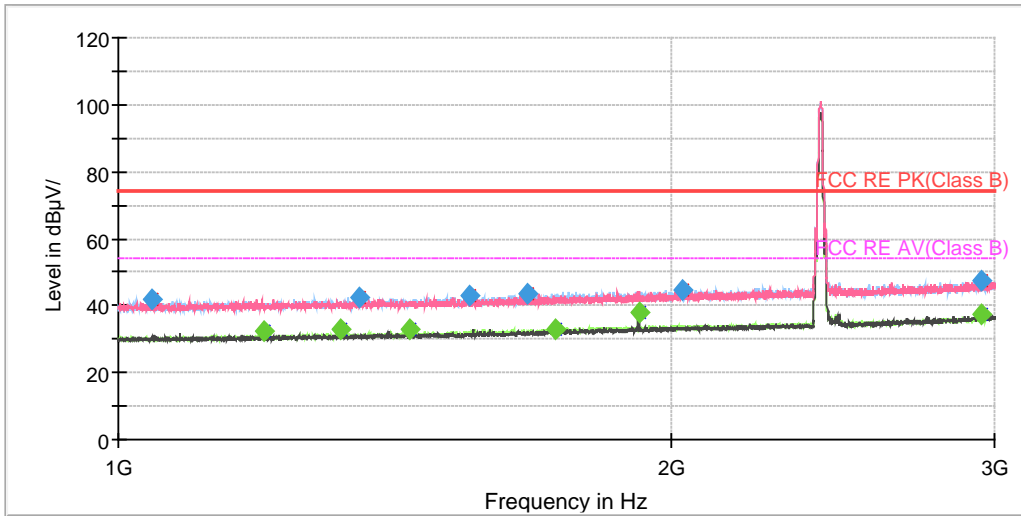

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

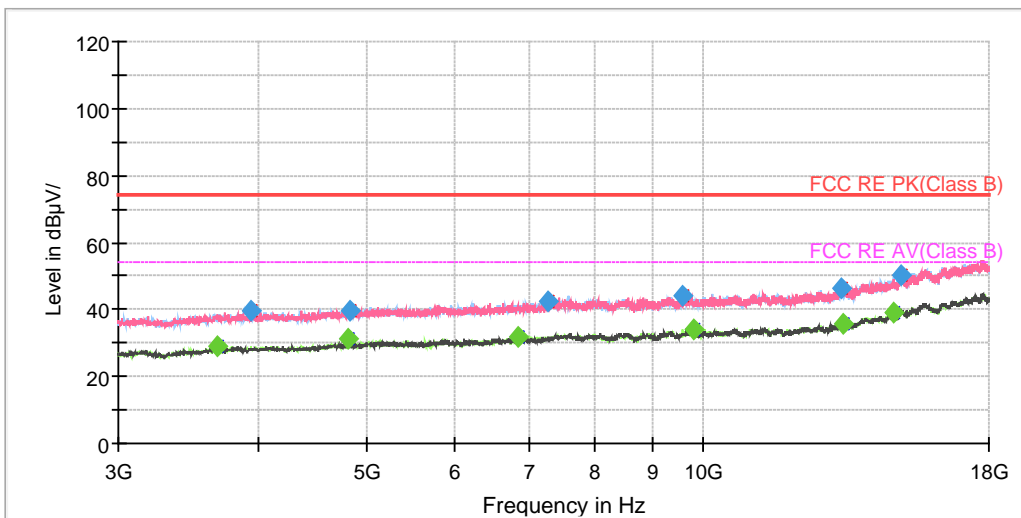


Radiates Emission from 3GHz to 18GHz




| Frequency (MHz) | MaxPeak (dB μ V/m) | Average (dB μ V/m) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) | Margin (dB) | Limit (dB μ V/m) |
|-----------------|------------------------|------------------------|-------------|-----|---------------|--------------|-------------|----------------------|
| 1043.000000 | 41.89 | --- | 200.0 | H | 14.0 | -8.4 | 32.11 | 74.00 |
| 1199.750000 | --- | 32.64 | 100.0 | V | 124.0 | -7.6 | 21.36 | 54.00 |
| 1320.000000 | --- | 32.67 | 100.0 | V | 52.0 | -6.9 | 21.33 | 54.00 |
| 1351.750000 | 42.21 | --- | 200.0 | H | 169.0 | -6.8 | 31.79 | 74.00 |
| 1440.000000 | --- | 32.67 | 200.0 | V | 355.0 | -6.3 | 21.33 | 54.00 |
| 1553.500000 | 43.18 | --- | 100.0 | H | 83.0 | -5.7 | 30.82 | 74.00 |
| 1670.000000 | 43.65 | --- | 100.0 | H | 63.0 | -5.0 | 30.35 | 74.00 |
| 1728.500000 | --- | 33.09 | 100.0 | H | 280.0 | -4.6 | 20.91 | 54.00 |
| 1920.250000 | --- | 37.78 | 100.0 | V | 323.0 | -3.6 | 16.22 | 54.00 |
| 2030.000000 | 44.72 | --- | 200.0 | H | 37.0 | -3.0 | 29.28 | 74.00 |
| 2949.250000 | 47.63 | --- | 100.0 | V | 108.0 | 1.1 | 26.37 | 74.00 |
| 2953.750000 | --- | 37.23 | 200.0 | V | 325.0 | 1.1 | 16.77 | 54.00 |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11b CH6

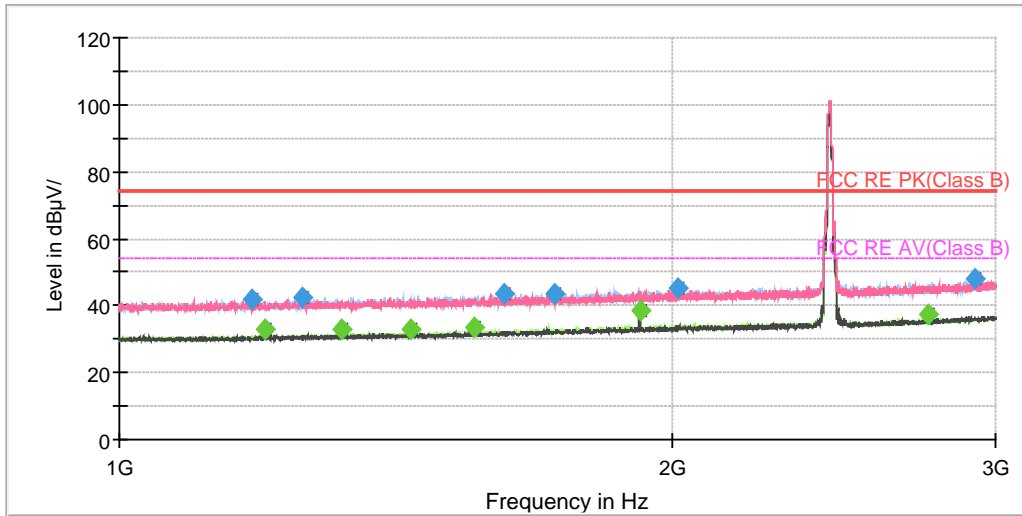

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

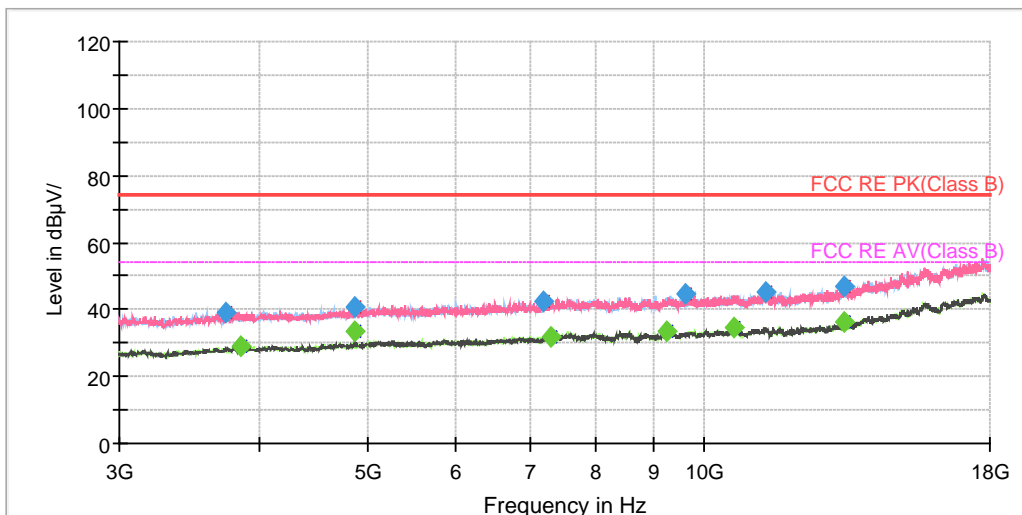


Radiates Emission from 3GHz to 18GHz




| Frequency (MHz) | MaxPeak (dB μ V/m) | Average (dB μ V/m) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) | Margin (dB) | Limit (dB μ V/m) |
|-----------------|------------------------|------------------------|-------------|-----|---------------|--------------|-------------|----------------------|
| 1181.000000 | 41.81 | --- | 100.0 | H | 123.0 | -7.7 | 32.19 | 74.00 |
| 1199.750000 | --- | 32.96 | 100.0 | V | 183.0 | -7.6 | 21.04 | 54.00 |
| 1257.750000 | 42.61 | --- | 200.0 | H | 67.0 | -7.3 | 31.39 | 74.00 |
| 1320.000000 | --- | 32.81 | 200.0 | V | 300.0 | -6.9 | 21.19 | 54.00 |
| 1440.250000 | --- | 32.95 | 200.0 | V | 323.0 | -6.3 | 21.05 | 54.00 |
| 1560.250000 | --- | 33.68 | 100.0 | V | 7.0 | -5.6 | 20.32 | 54.00 |
| 1620.750000 | 43.58 | --- | 200.0 | V | 102.0 | -5.3 | 30.42 | 74.00 |
| 1724.250000 | 43.63 | --- | 200.0 | V | 86.0 | -4.7 | 30.37 | 74.00 |
| 1920.250000 | --- | 38.67 | 100.0 | V | 337.0 | -3.6 | 15.33 | 54.00 |
| 2014.500000 | 45.13 | --- | 100.0 | H | 193.0 | -3.1 | 28.87 | 74.00 |
| 2760.250000 | --- | 37.43 | 100.0 | V | 144.0 | -0.1 | 16.57 | 54.00 |
| 2924.250000 | 48.12 | --- | 200.0 | H | 254.0 | 0.9 | 25.88 | 74.00 |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11b CH11

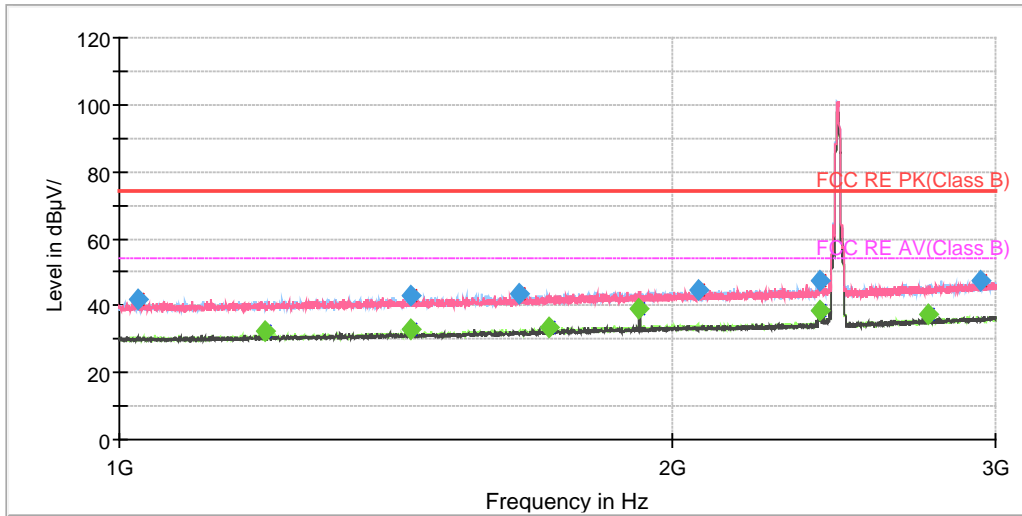

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

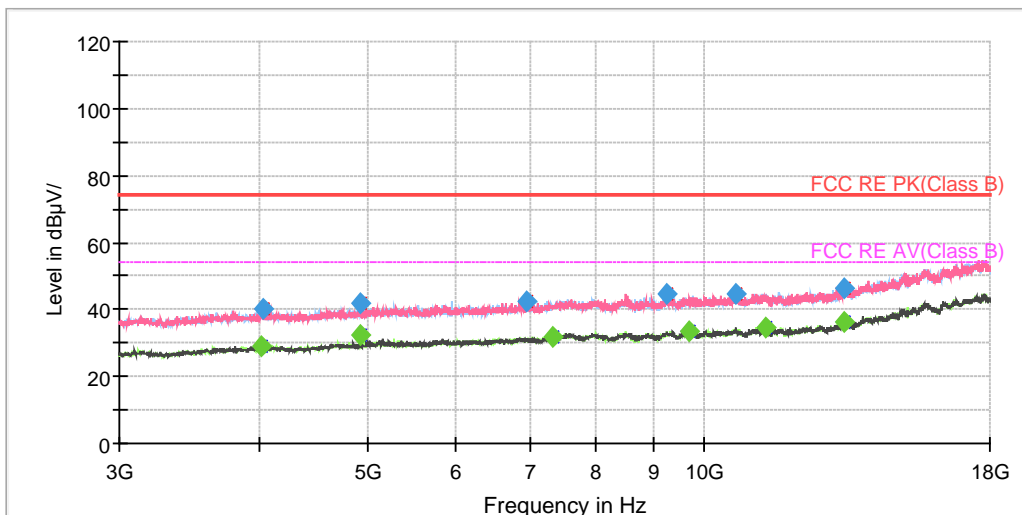


Radiates Emission from 3GHz to 18GHz




| Frequency (MHz) | MaxPeak (dB μ V/m) | Average (dB μ V/m) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) | Margin (dB) | Limit (dB μ V/m) |
|-----------------|------------------------|------------------------|-------------|-----|---------------|--------------|-------------|----------------------|
| 1022.750000 | 41.80 | --- | 200.0 | H | 170.0 | -8.6 | 32.20 | 74.00 |
| 1200.250000 | --- | 32.27 | 100.0 | V | 125.0 | -7.6 | 21.73 | 54.00 |
| 1440.000000 | --- | 32.76 | 200.0 | V | 209.0 | -6.3 | 21.24 | 54.00 |
| 1440.250000 | 42.75 | --- | 200.0 | V | 350.0 | -6.3 | 31.25 | 74.00 |
| 1652.250000 | 43.39 | --- | 100.0 | H | 249.0 | -5.1 | 30.61 | 74.00 |
| 1714.500000 | --- | 33.40 | 100.0 | H | 185.0 | -4.7 | 20.60 | 54.00 |
| 1920.000000 | --- | 39.19 | 100.0 | V | 305.0 | -3.6 | 14.81 | 54.00 |
| 2068.750000 | 44.63 | --- | 100.0 | H | 242.0 | -2.9 | 29.37 | 74.00 |
| 2406.000000 | --- | 38.44 | 100.0 | H | 290.0 | -1.6 | 15.56 | 54.00 |
| 2406.750000 | 47.42 | --- | 100.0 | H | 322.0 | -1.6 | 26.58 | 74.00 |
| 2760.000000 | --- | 37.34 | 100.0 | V | 49.0 | -0.1 | 16.66 | 54.00 |
| 2947.000000 | 47.48 | --- | 100.0 | V | 135.0 | 1.0 | 26.52 | 74.00 |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11g CH1

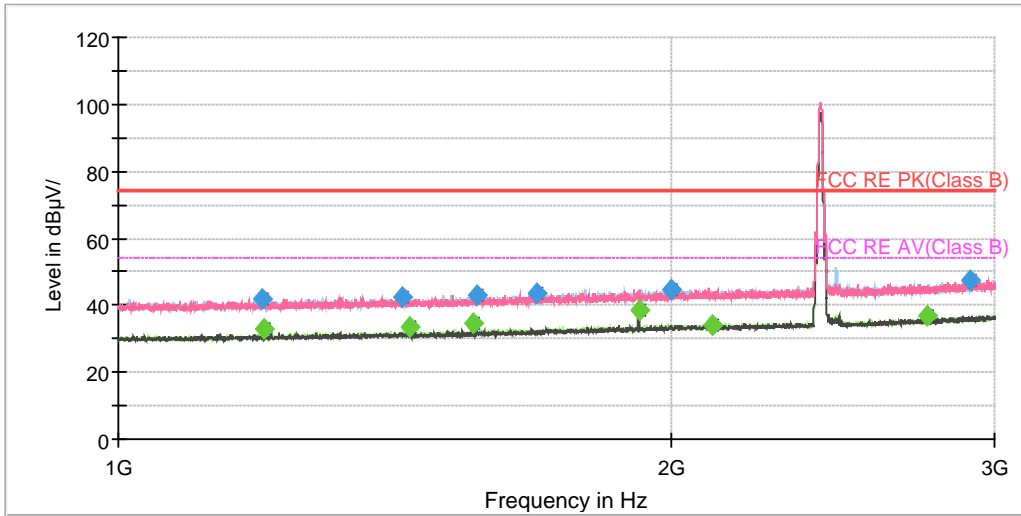

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

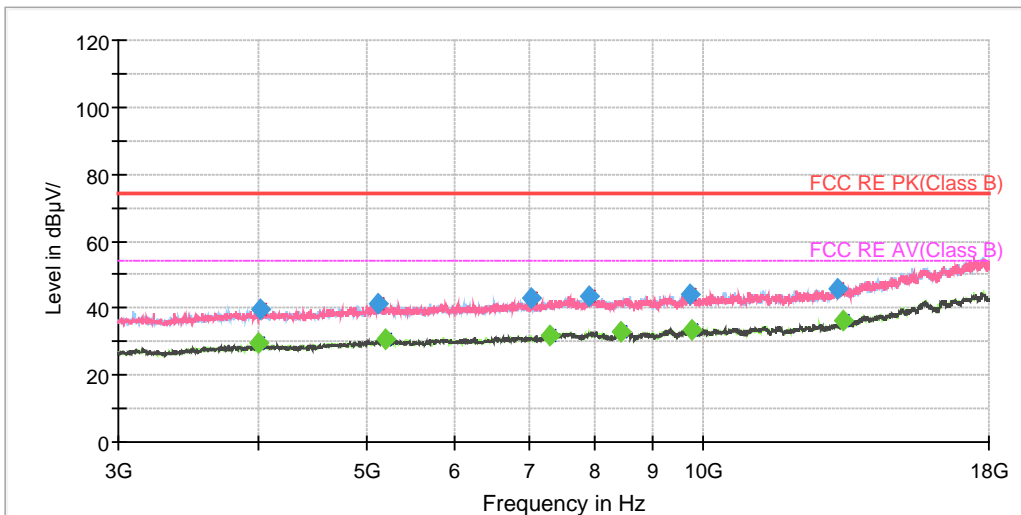


Radiates Emission from 3GHz to 18GHz




| Frequency (MHz) | MaxPeak (dB μ V/m) | Average (dB μ V/m) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) | Margin (dB) | Limit (dB μ V/m) |
|-----------------|------------------------|------------------------|-------------|-----|---------------|--------------|-------------|----------------------|
| 1197.500000 | 41.74 | --- | 200.0 | H | 136.0 | -7.6 | 32.26 | 74.00 |
| 1200.000000 | --- | 33.19 | 100.0 | V | 183.0 | -7.6 | 20.81 | 54.00 |
| 1429.000000 | 42.30 | --- | 200.0 | V | 148.0 | -6.4 | 31.70 | 74.00 |
| 1440.000000 | --- | 33.67 | 100.0 | V | 57.0 | -6.3 | 20.33 | 54.00 |
| 1560.000000 | --- | 34.41 | 200.0 | V | 348.0 | -5.6 | 19.59 | 54.00 |
| 1568.000000 | 42.99 | --- | 200.0 | V | 345.0 | -5.6 | 31.01 | 74.00 |
| 1691.750000 | 43.60 | --- | 200.0 | H | 56.0 | -4.9 | 30.40 | 74.00 |
| 1920.250000 | --- | 38.50 | 100.0 | V | 289.0 | -3.6 | 15.50 | 54.00 |
| 2000.500000 | 44.80 | --- | 200.0 | H | 7.0 | -3.2 | 29.20 | 74.00 |
| 2108.250000 | --- | 34.24 | 200.0 | V | 98.0 | -2.7 | 19.76 | 54.00 |
| 2760.250000 | --- | 37.05 | 100.0 | V | 219.0 | -0.1 | 16.95 | 54.00 |
| 2912.000000 | 47.36 | --- | 200.0 | V | 306.0 | 0.9 | 26.64 | 74.00 |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11g CH6

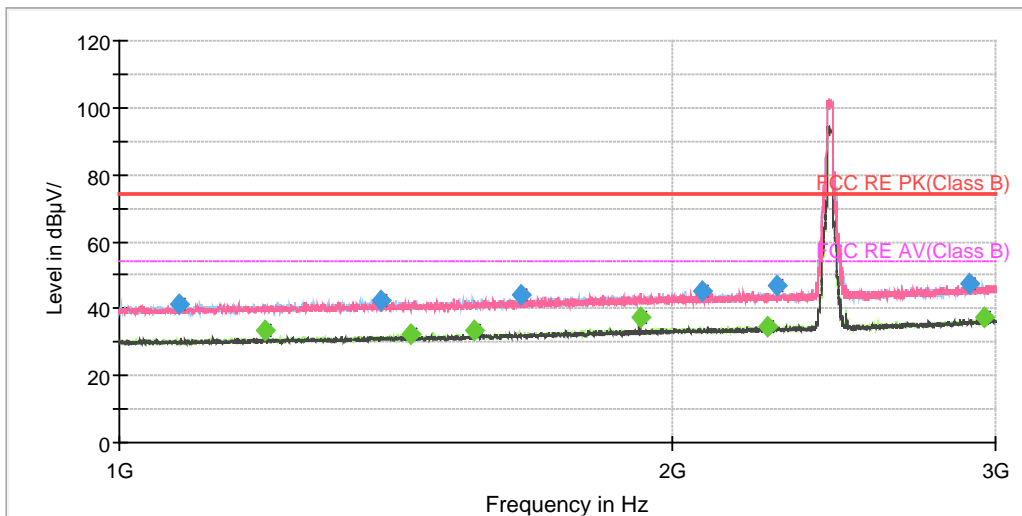

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

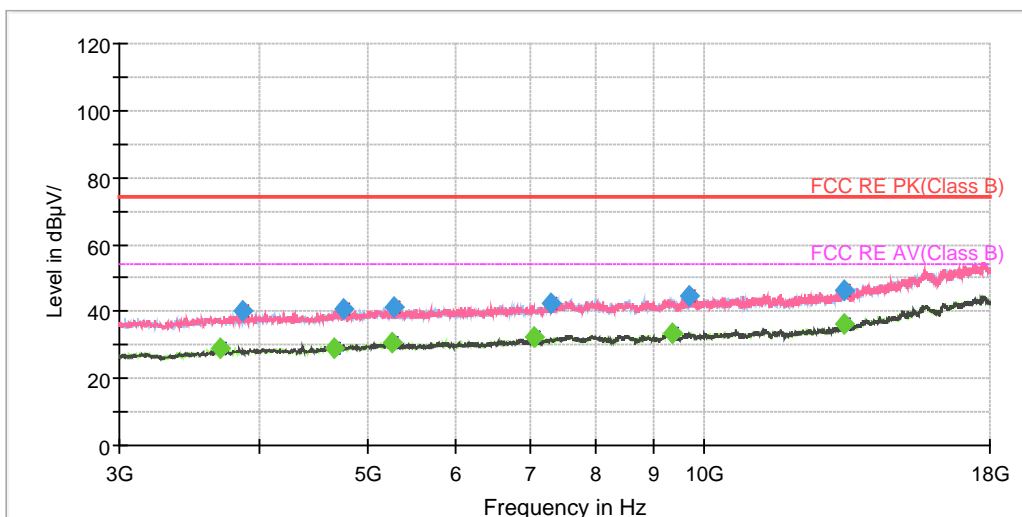

Radiates Emission from 3GHz to 18GHz




| Frequency (MHz) | MaxPeak (dB μ V/m) | Average (dB μ V/m) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) | Margin (dB) | Limit (dB μ V/m) |
|-----------------|------------------------|------------------------|-------------|-----|---------------|--------------|-------------|----------------------|
| 1077.250000 | 41.51 | --- | 200.0 | V | 244.0 | -8.3 | 32.49 | 74.00 |
| 1200.000000 | --- | 33.21 | 100.0 | V | 171.0 | -7.6 | 20.79 | 54.00 |
| 1389.000000 | 42.50 | --- | 200.0 | V | 10.0 | -6.5 | 31.50 | 74.00 |
| 1440.000000 | --- | 32.46 | 200.0 | V | 344.0 | -6.3 | 21.54 | 54.00 |
| 1560.000000 | --- | 33.67 | 200.0 | V | 34.0 | -5.6 | 20.33 | 54.00 |
| 1653.000000 | 43.92 | --- | 200.0 | V | 250.0 | -5.1 | 30.08 | 74.00 |
| 1920.250000 | --- | 37.36 | 200.0 | V | 0.0 | -3.6 | 16.64 | 54.00 |
| 2076.000000 | 45.07 | --- | 200.0 | V | 32.0 | -2.9 | 28.93 | 74.00 |
| 2256.750000 | --- | 34.70 | 200.0 | V | 0.0 | -2.3 | 19.30 | 54.00 |
| 2283.500000 | 47.13 | --- | 200.0 | V | 0.0 | -2.1 | 26.87 | 74.00 |
| 2905.500000 | 47.63 | --- | 200.0 | V | 108.0 | 0.8 | 26.37 | 74.00 |
| 2955.000000 | --- | 37.18 | 200.0 | V | 54.0 | 1.1 | 16.82 | 54.00 |


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



802.11g CH11

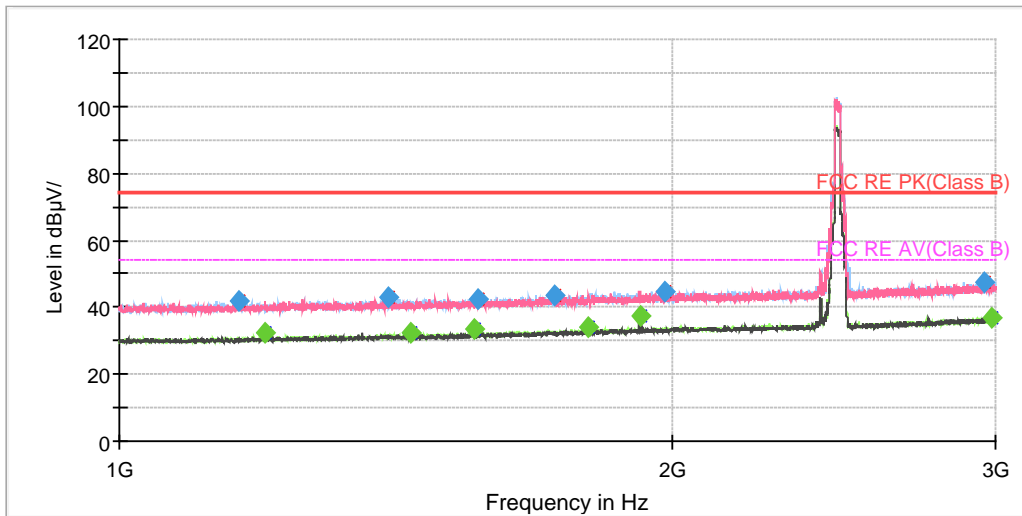

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

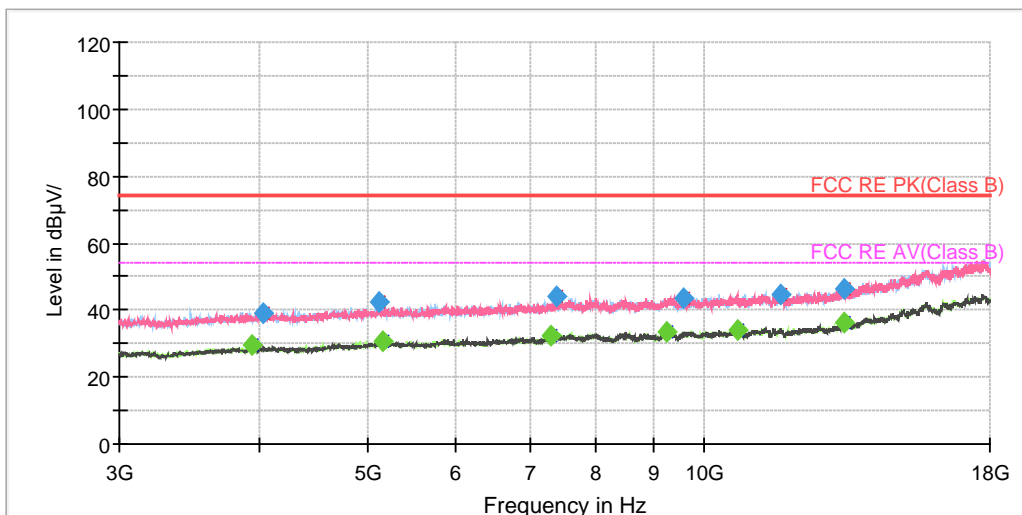


Radiates Emission from 3GHz to 18GHz




| Frequency (MHz) | MaxPeak (dB μ V/m) | Average (dB μ V/m) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) | Margin (dB) | Limit (dB μ V/m) |
|-----------------|------------------------|------------------------|-------------|-----|---------------|--------------|-------------|----------------------|
| 1162.000000 | 41.94 | --- | 100.0 | H | 49.0 | -7.8 | 32.06 | 74.00 |
| 1200.000000 | --- | 32.26 | 100.0 | V | 40.0 | -7.6 | 21.74 | 54.00 |
| 1401.750000 | 42.70 | --- | 100.0 | H | 167.0 | -6.5 | 31.30 | 74.00 |
| 1440.250000 | --- | 32.62 | 100.0 | V | 54.0 | -6.3 | 21.38 | 54.00 |
| 1560.000000 | --- | 33.66 | 200.0 | V | 336.0 | -5.6 | 20.34 | 54.00 |
| 1567.000000 | 42.66 | --- | 200.0 | V | 310.0 | -5.6 | 31.34 | 74.00 |
| 1726.250000 | 43.44 | --- | 100.0 | H | 160.0 | -4.6 | 30.56 | 74.00 |
| 1800.000000 | --- | 33.89 | 100.0 | V | 0.0 | -4.3 | 20.11 | 54.00 |
| 1920.250000 | --- | 37.14 | 100.0 | V | 70.0 | -3.6 | 16.86 | 54.00 |
| 1981.250000 | 44.58 | --- | 100.0 | H | 87.0 | -3.3 | 29.42 | 74.00 |
| 2954.750000 | 47.32 | --- | 200.0 | H | 86.0 | 1.1 | 26.68 | 74.00 |
| 2987.500000 | --- | 37.01 | 200.0 | H | 159.0 | 1.3 | 16.99 | 54.00 |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT20) CH1

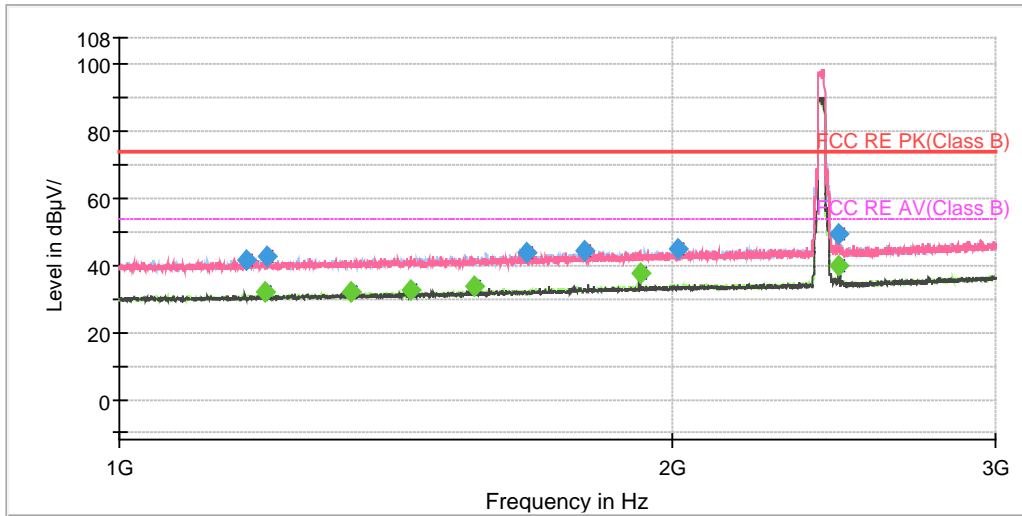

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

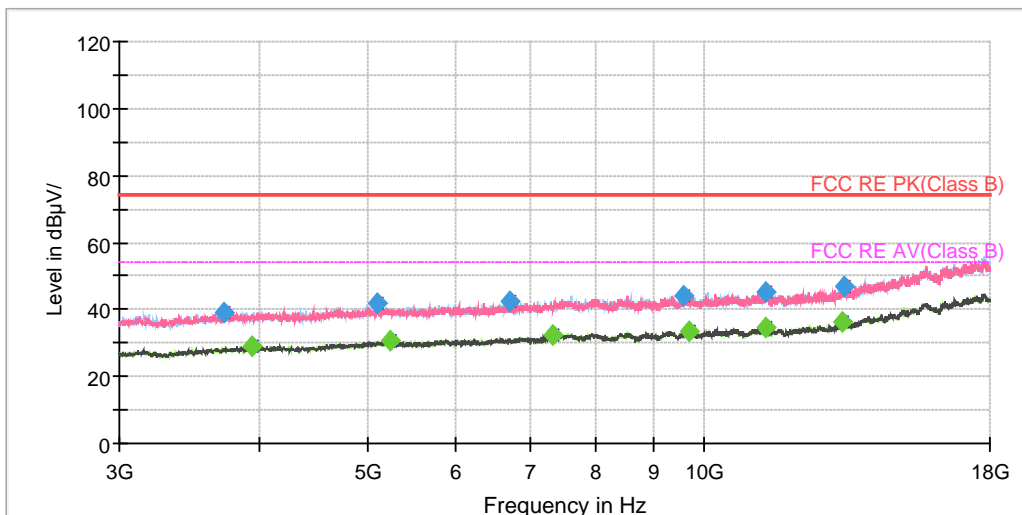


Radiates Emission from 3GHz to 18GHz




| Frequency (MHz) | MaxPeak (dB μ V/m) | Average (dB μ V/m) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) | Margin (dB) | Limit (dB μ V/m) |
|-----------------|------------------------|------------------------|-------------|-----|---------------|--------------|-------------|----------------------|
| 1173.250000 | 41.51 | --- | 100.0 | H | 229.0 | -7.7 | 32.49 | 74.00 |
| 1200.000000 | --- | 31.96 | 100.0 | V | 190.0 | -7.6 | 22.04 | 54.00 |
| 1202.750000 | 42.44 | --- | 100.0 | H | 97.0 | -7.6 | 31.56 | 74.00 |
| 1335.750000 | --- | 31.96 | 100.0 | H | 219.0 | -6.9 | 22.04 | 54.00 |
| 1440.000000 | --- | 32.66 | 200.0 | V | 186.0 | -6.3 | 21.34 | 54.00 |
| 1560.000000 | --- | 33.83 | 100.0 | V | 82.0 | -5.6 | 20.17 | 54.00 |
| 1666.250000 | 43.62 | --- | 200.0 | V | 206.0 | -5.0 | 30.38 | 74.00 |
| 1790.750000 | 44.64 | --- | 200.0 | H | 120.0 | -4.3 | 29.36 | 74.00 |
| 1920.250000 | --- | 37.56 | 100.0 | V | 347.0 | -3.6 | 16.44 | 54.00 |
| 2013.750000 | 44.78 | --- | 200.0 | H | 120.0 | -3.1 | 29.22 | 74.00 |
| 2463.500000 | 49.29 | --- | 100.0 | H | 321.0 | -1.4 | 24.71 | 74.00 |
| 2464.000000 | --- | 39.84 | 100.0 | H | 325.0 | -1.4 | 14.16 | 54.00 |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT20) CH6

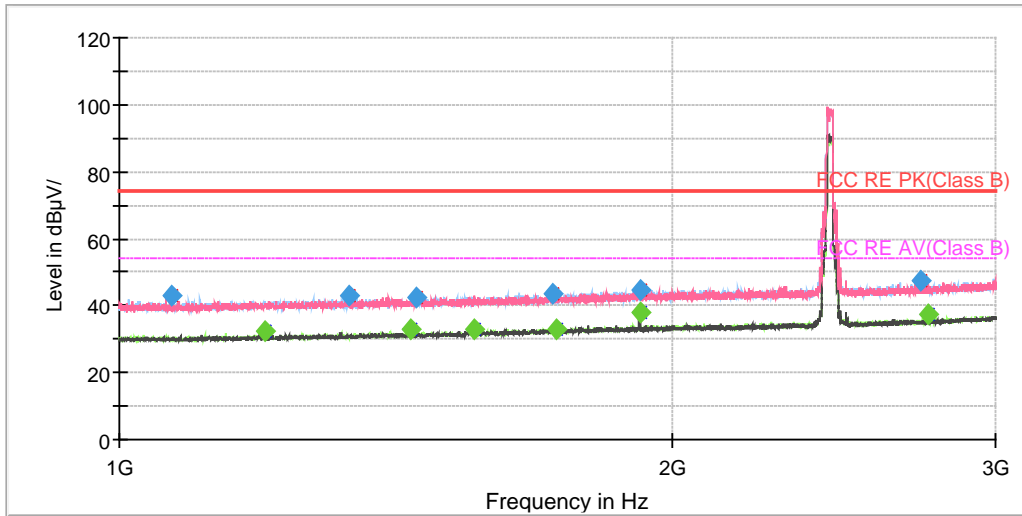

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

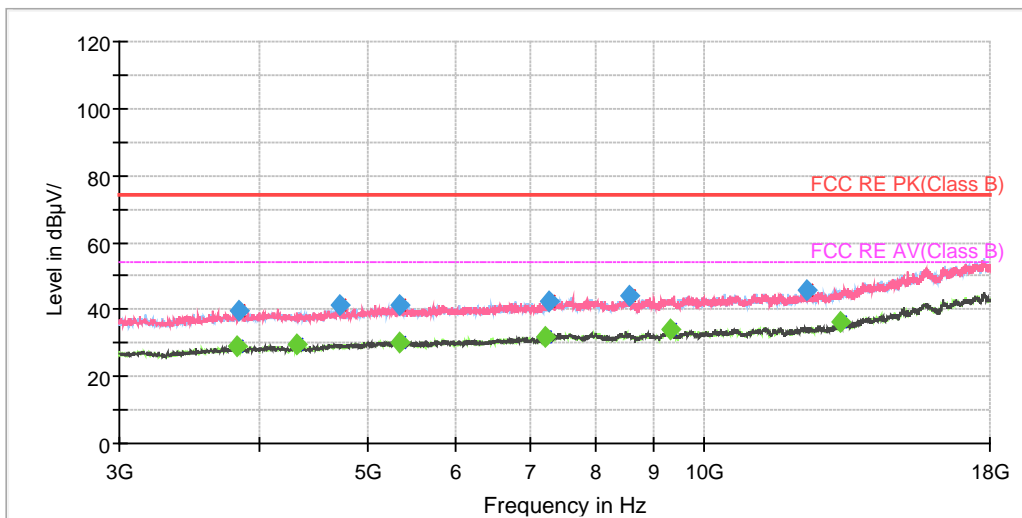


Radiates Emission from 3GHz to 18GHz




| Frequency (MHz) | MaxPeak (dB μ V/m) | Average (dB μ V/m) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) | Margin (dB) | Limit (dB μ V/m) |
|-----------------|------------------------|------------------------|-------------|-----|---------------|--------------|-------------|----------------------|
| 1067.750000 | 43.10 | --- | 200.0 | H | 196.0 | -8.4 | 30.90 | 74.00 |
| 1200.000000 | --- | 32.36 | 100.0 | V | 183.0 | -7.6 | 21.64 | 54.00 |
| 1334.500000 | 42.81 | --- | 200.0 | V | 310.0 | -6.9 | 31.19 | 74.00 |
| 1440.000000 | --- | 32.65 | 200.0 | V | 191.0 | -6.3 | 21.35 | 54.00 |
| 1449.750000 | 42.56 | --- | 200.0 | V | 281.0 | -6.3 | 31.44 | 74.00 |
| 1560.250000 | --- | 32.80 | 200.0 | V | 0.0 | -5.6 | 21.20 | 54.00 |
| 1723.750000 | 43.80 | --- | 100.0 | H | 205.0 | -4.7 | 30.20 | 74.00 |
| 1728.500000 | --- | 33.12 | 100.0 | H | 182.0 | -4.6 | 20.88 | 54.00 |
| 1920.250000 | 44.71 | --- | 100.0 | V | 337.0 | -3.6 | 29.29 | 74.00 |
| 1920.250000 | --- | 38.18 | 100.0 | V | 337.0 | -3.6 | 15.82 | 54.00 |
| 2733.000000 | 47.32 | --- | 200.0 | V | 0.0 | -0.2 | 26.68 | 74.00 |
| 2760.250000 | --- | 37.20 | 200.0 | V | 343.0 | -0.1 | 16.80 | 54.00 |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT20) CH11

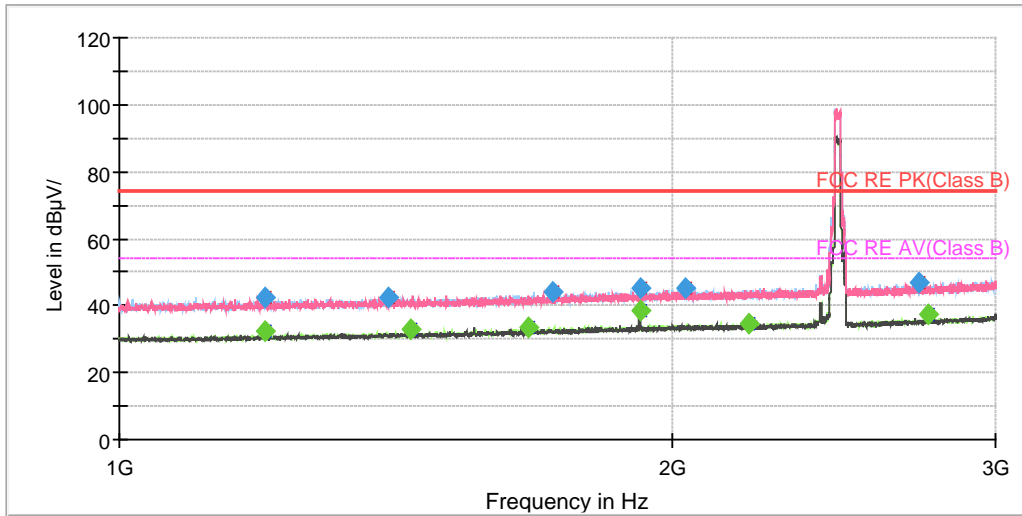

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

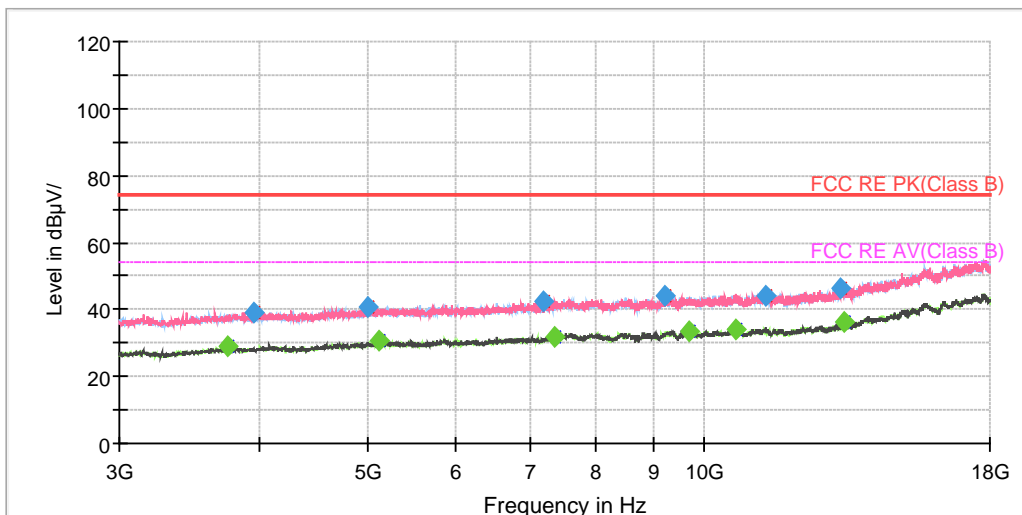

Radiates Emission from 3GHz to 18GHz




| Frequency (MHz) | MaxPeak (dB μ V/m) | Average (dB μ V/m) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) | Margin (dB) | Limit (dB μ V/m) |
|-----------------|------------------------|------------------------|-------------|-----|---------------|--------------|-------------|----------------------|
| 1199.750000 | 42.36 | --- | 100.0 | V | 304.0 | -7.6 | 31.64 | 74.00 |
| 1200.250000 | --- | 32.26 | 100.0 | V | 215.0 | -7.6 | 21.74 | 54.00 |
| 1402.750000 | 42.17 | --- | 100.0 | V | 297.0 | -6.5 | 31.83 | 74.00 |
| 1440.000000 | --- | 32.74 | 100.0 | V | 152.0 | -6.3 | 21.26 | 54.00 |
| 1668.750000 | --- | 33.54 | 200.0 | H | 104.0 | -5.0 | 20.46 | 54.00 |
| 1722.250000 | 43.89 | --- | 200.0 | H | 261.0 | -4.7 | 30.11 | 74.00 |
| 1920.250000 | 44.95 | --- | 100.0 | V | 176.0 | -3.6 | 29.05 | 74.00 |
| 1920.250000 | --- | 38.38 | 100.0 | V | 176.0 | -3.6 | 15.62 | 54.00 |
| 2032.000000 | 44.97 | --- | 100.0 | H | 293.0 | -3.0 | 29.03 | 74.00 |
| 2204.500000 | --- | 34.40 | 200.0 | V | 267.0 | -2.4 | 19.60 | 54.00 |
| 2724.000000 | 47.01 | --- | 100.0 | V | 26.0 | -0.3 | 26.99 | 74.00 |
| 2760.250000 | --- | 37.64 | 100.0 | V | 212.0 | -0.1 | 16.36 | 54.00 |


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



802.11n (HT40) CH3

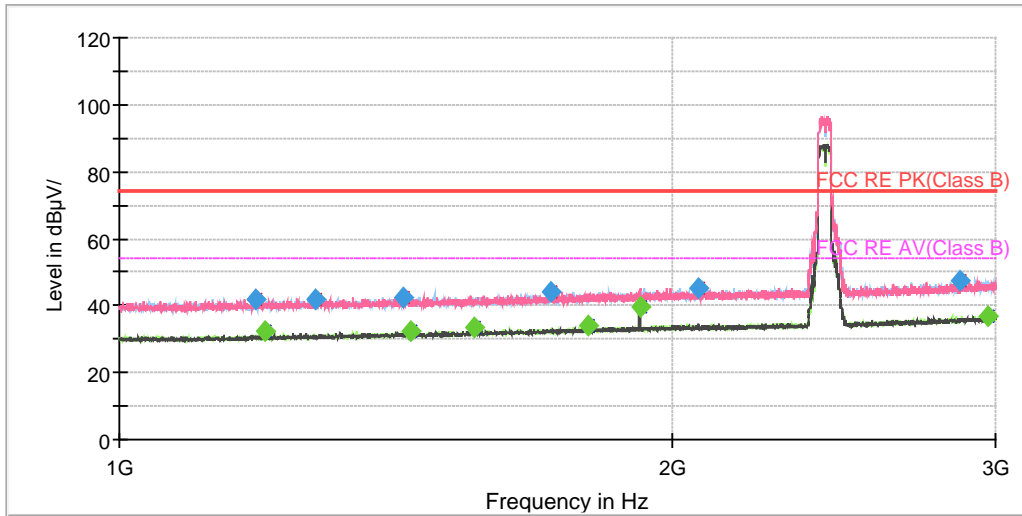

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

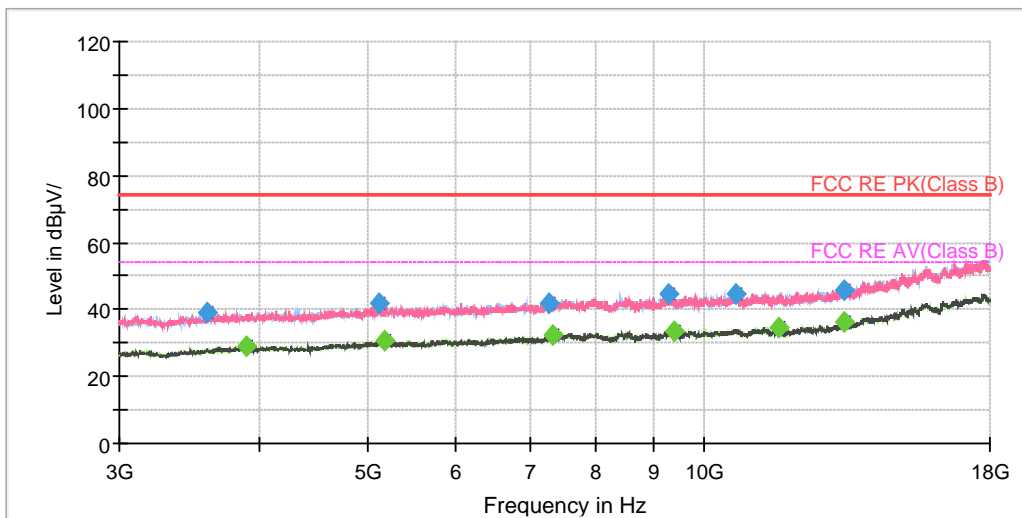


Radiates Emission from 3GHz to 18GHz




| Frequency (MHz) | MaxPeak (dB μ V/m) | Average (dB μ V/m) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) | Margin (dB) | Limit (dB μ V/m) |
|-----------------|------------------------|------------------------|-------------|-----|---------------|--------------|-------------|----------------------|
| 1186.500000 | 41.98 | --- | 100.0 | V | 263.0 | -7.7 | 32.02 | 74.00 |
| 1200.000000 | --- | 32.30 | 100.0 | V | 329.0 | -7.6 | 21.70 | 54.00 |
| 1280.000000 | 41.76 | --- | 200.0 | V | 87.0 | -7.1 | 32.24 | 74.00 |
| 1427.250000 | 42.28 | --- | 200.0 | H | 344.0 | -6.4 | 31.72 | 74.00 |
| 1440.000000 | --- | 32.57 | 200.0 | V | 170.0 | -6.3 | 21.43 | 54.00 |
| 1560.250000 | --- | 33.39 | 100.0 | V | 326.0 | -5.6 | 20.61 | 54.00 |
| 1719.750000 | 43.84 | --- | 200.0 | H | 212.0 | -4.7 | 30.16 | 74.00 |
| 1800.000000 | --- | 34.18 | 100.0 | V | 349.0 | -4.3 | 19.82 | 54.00 |
| 1920.250000 | --- | 39.74 | 100.0 | V | 343.0 | -3.6 | 14.26 | 54.00 |
| 2065.000000 | 45.18 | --- | 200.0 | H | 305.0 | -2.9 | 28.82 | 74.00 |
| 2866.250000 | 47.58 | --- | 200.0 | V | 285.0 | 0.6 | 26.42 | 74.00 |
| 2973.750000 | --- | 36.98 | 100.0 | H | 228.0 | 1.2 | 17.02 | 54.00 |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT40) CH6

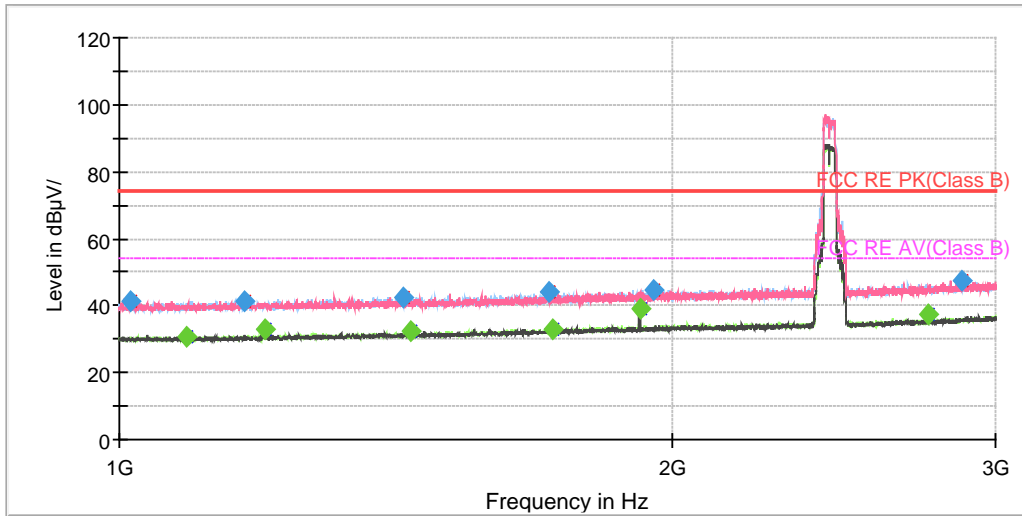

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

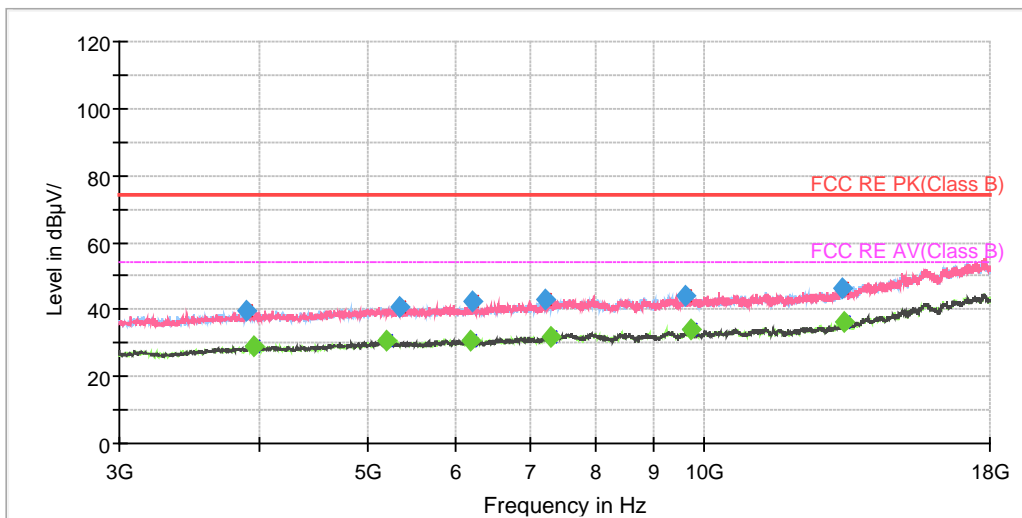


Radiates Emission from 3GHz to 18GHz




| Frequency (MHz) | MaxPeak (dB μ V/m) | Average (dB μ V/m) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) | Margin (dB) | Limit (dB μ V/m) |
|-----------------|------------------------|------------------------|-------------|-----|---------------|--------------|-------------|----------------------|
| 1013.250000 | 41.52 | --- | 200.0 | H | 84.0 | -8.6 | 32.48 | 74.00 |
| 1088.750000 | --- | 30.47 | 100.0 | H | 256.0 | -8.2 | 23.53 | 54.00 |
| 1169.250000 | 41.48 | --- | 200.0 | V | 298.0 | -7.8 | 32.52 | 74.00 |
| 1200.250000 | --- | 32.94 | 100.0 | V | 307.0 | -7.6 | 21.06 | 54.00 |
| 1427.500000 | 42.53 | --- | 200.0 | H | 158.0 | -6.4 | 31.47 | 74.00 |
| 1440.000000 | --- | 32.41 | 100.0 | V | 168.0 | -6.3 | 21.59 | 54.00 |
| 1714.250000 | 44.06 | --- | 200.0 | V | 101.0 | -4.7 | 29.94 | 74.00 |
| 1723.750000 | --- | 33.16 | 200.0 | V | 121.0 | -4.7 | 20.84 | 54.00 |
| 1920.250000 | --- | 38.99 | 100.0 | V | 340.0 | -3.6 | 15.01 | 54.00 |
| 1954.750000 | 44.69 | --- | 100.0 | V | 151.0 | -3.4 | 29.31 | 74.00 |
| 2760.500000 | --- | 37.30 | 100.0 | V | 201.0 | -0.1 | 16.7 | 54.00 |
| 2877.000000 | 47.46 | --- | 100.0 | V | 122.0 | 0.6 | 26.54 | 74.00 |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT40) CH9

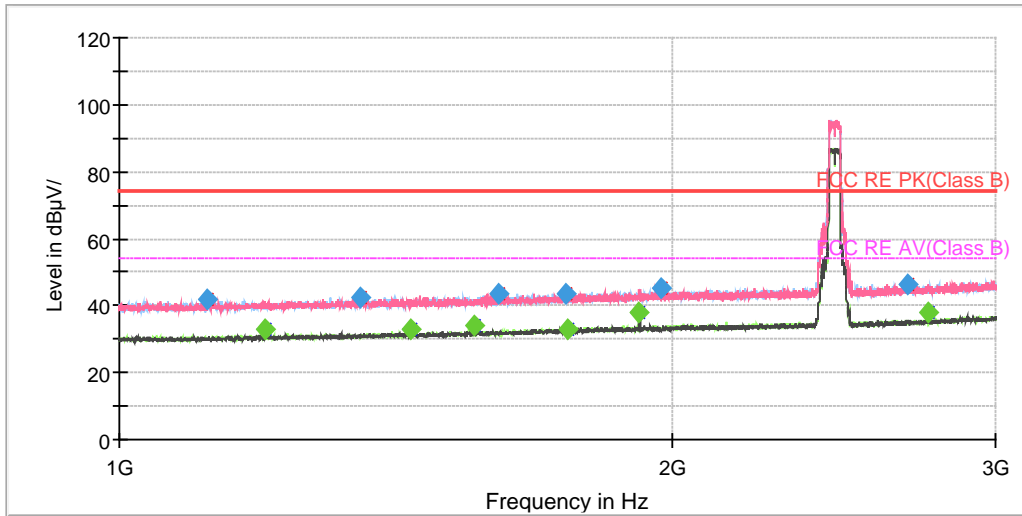

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

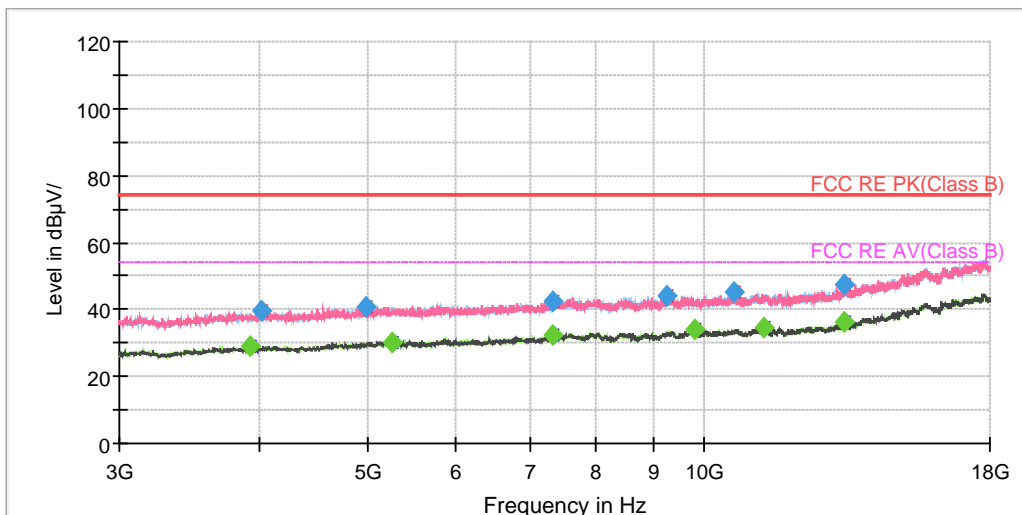


Radiates Emission from 3GHz to 18GHz




| Frequency (MHz) | MaxPeak (dB μ V/m) | Average (dB μ V/m) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) | Margin (dB) | Limit (dB μ V/m) |
|-----------------|------------------------|------------------------|-------------|-----|---------------|--------------|-------------|----------------------|
| 1115.250000 | 42.02 | --- | 100.0 | H | 6.0 | -8.1 | 31.98 | 74.00 |
| 1200.000000 | --- | 33.13 | 100.0 | V | 324.0 | -7.6 | 20.87 | 54.00 |
| 1353.750000 | 42.32 | --- | 100.0 | H | 69.0 | -6.7 | 31.68 | 74.00 |
| 1440.000000 | --- | 32.76 | 200.0 | V | 343.0 | -6.3 | 21.24 | 54.00 |
| 1560.250000 | --- | 33.87 | 200.0 | V | 0.0 | -5.6 | 20.13 | 54.00 |
| 1607.750000 | 43.60 | --- | 100.0 | H | 26.0 | -5.3 | 30.40 | 74.00 |
| 1750.750000 | 43.58 | --- | 200.0 | H | 4.0 | -4.5 | 30.42 | 74.00 |
| 1752.750000 | --- | 33.13 | 200.0 | V | 0.0 | -4.5 | 20.87 | 54.00 |
| 1920.000000 | --- | 37.88 | 100.0 | V | 356.0 | -3.6 | 16.12 | 54.00 |
| 1973.750000 | 45.37 | --- | 200.0 | H | 335.0 | -3.3 | 28.63 | 74.00 |
| 2689.750000 | 46.60 | --- | 100.0 | V | 281.0 | -0.4 | 27.40 | 74.00 |
| 2760.500000 | --- | 38.12 | 100.0 | V | 211.0 | -0.1 | 15.88 | 54.00 |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

BLE-Channel 0

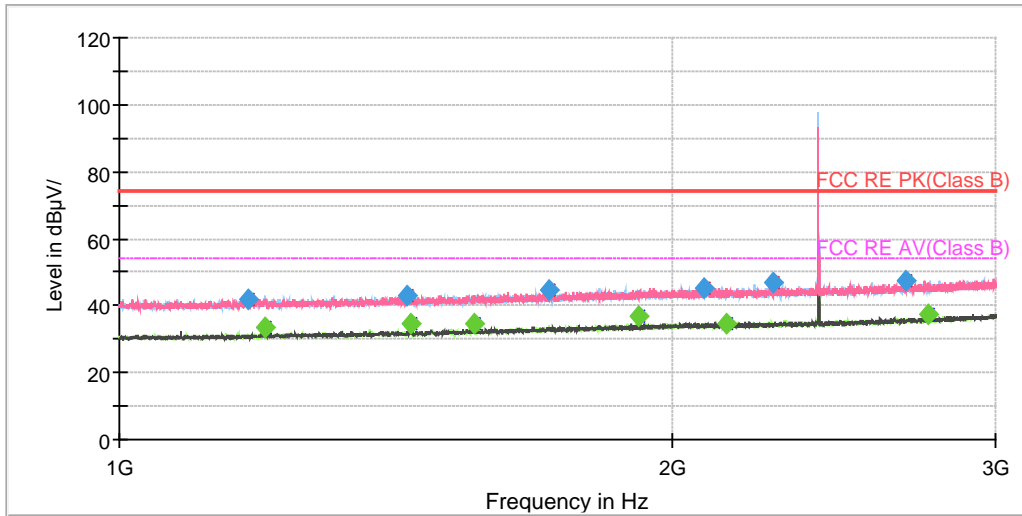

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

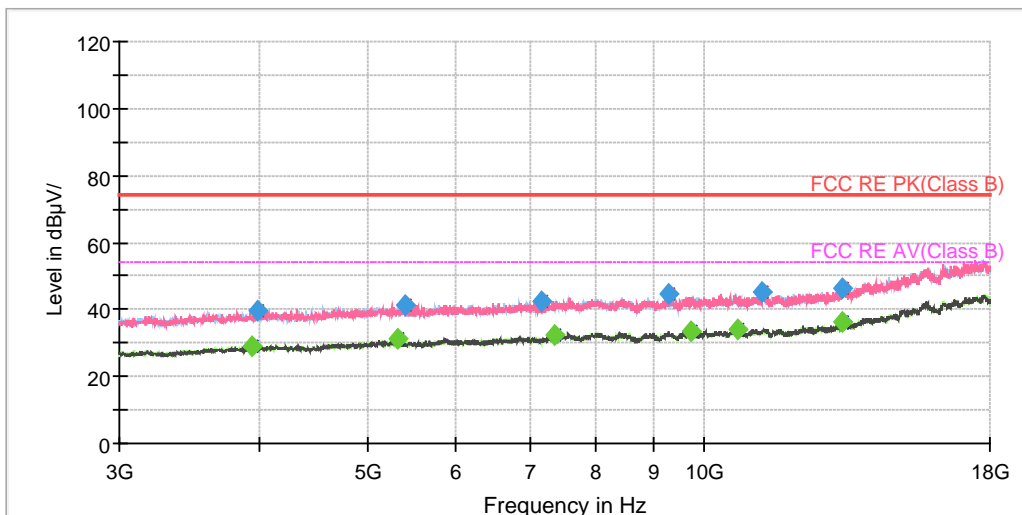


Radiates Emission from 3GHz to 18GHz




| Frequency (MHz) | MaxPeak (dB μ V/m) | Average (dB μ V/m) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) | Margin (dB) | Limit (dB μ V/m) |
|-----------------|------------------------|------------------------|-------------|-----|---------------|--------------|-------------|----------------------|
| 1174.250000 | 42.04 | --- | 100.0 | H | 247.0 | -7.7 | 31.96 | 74.00 |
| 1200.000000 | --- | 33.63 | 200.0 | H | 29.0 | -7.6 | 20.37 | 54.00 |
| 1433.500000 | 43.02 | --- | 100.0 | V | 197.0 | -6.3 | 30.98 | 74.00 |
| 1440.250000 | --- | 34.44 | 100.0 | V | 223.0 | -6.3 | 19.56 | 54.00 |
| 1560.000000 | --- | 34.83 | 200.0 | V | 0.0 | -5.6 | 19.17 | 54.00 |
| 1714.250000 | 44.40 | --- | 100.0 | H | 87.0 | -4.7 | 29.60 | 74.00 |
| 1920.000000 | --- | 36.62 | 100.0 | V | 0.0 | -3.6 | 17.38 | 54.00 |
| 2080.000000 | 45.20 | --- | 200.0 | V | 340.0 | -2.9 | 28.80 | 74.00 |
| 2139.500000 | --- | 34.75 | 200.0 | H | 52.0 | -2.7 | 19.25 | 54.00 |
| 2272.500000 | 46.76 | --- | 100.0 | V | 65.0 | -2.2 | 27.24 | 74.00 |
| 2681.250000 | 47.56 | --- | 200.0 | V | 340.0 | -0.5 | 26.44 | 74.00 |
| 2760.250000 | --- | 37.40 | 200.0 | V | 333.0 | -0.1 | 16.60 | 54.00 |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

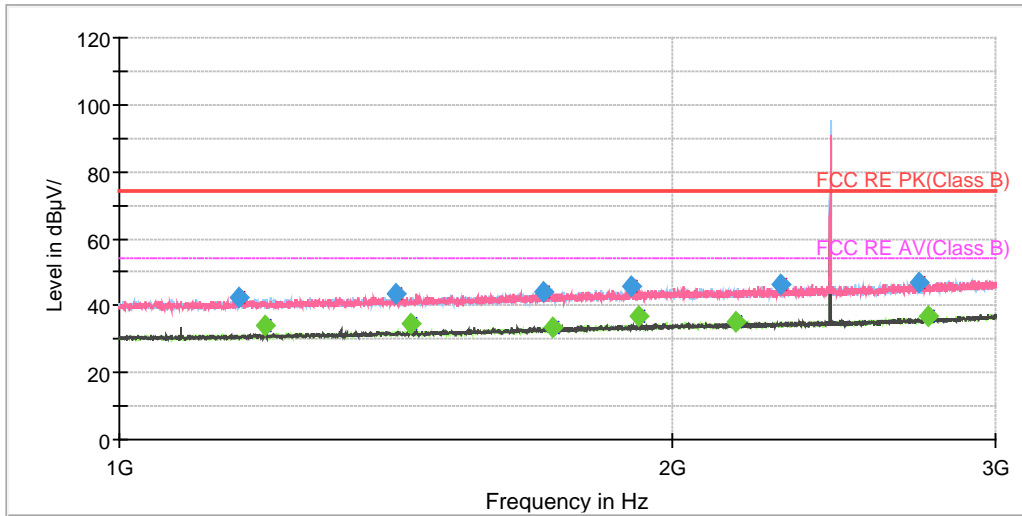BLE-Channel 19

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

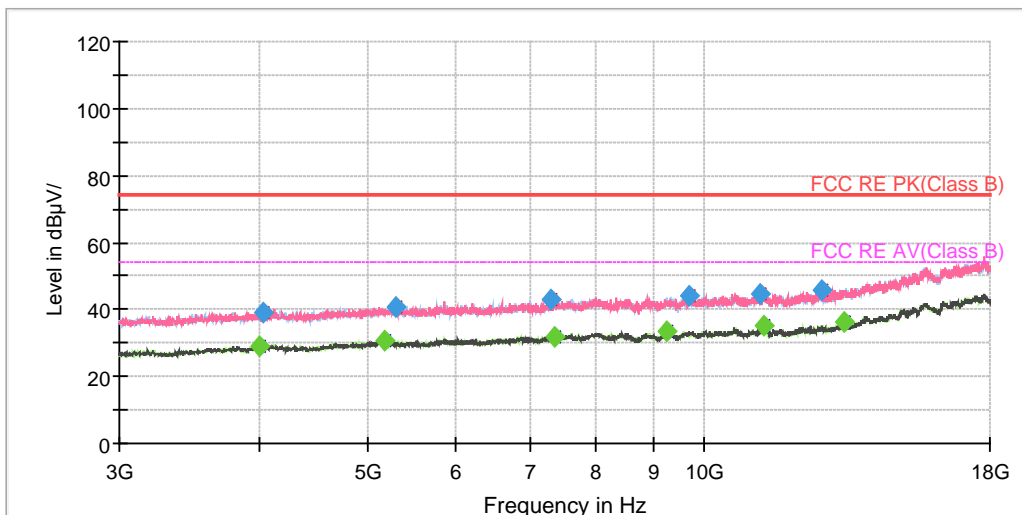


Radiates Emission from 3GHz to 18GHz




| Frequency (MHz) | MaxPeak (dB μ V/m) | Average (dB μ V/m) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) | Margin (dB) | Limit (dB μ V/m) |
|-----------------|------------------------|------------------------|-------------|-----|---------------|--------------|-------------|----------------------|
| 1161.250000 | 42.44 | --- | 100.0 | H | 349.0 | -7.8 | 31.56 | 74.00 |
| 1200.000000 | --- | 34.00 | 200.0 | V | 357.0 | -7.6 | 20.00 | 54.00 |
| 1412.750000 | 43.78 | --- | 100.0 | V | 110.0 | -6.4 | 30.22 | 74.00 |
| 1440.000000 | --- | 34.86 | 200.0 | V | 354.0 | -6.3 | 19.14 | 54.00 |
| 1703.250000 | 43.98 | --- | 100.0 | V | 215.0 | -4.8 | 30.02 | 74.00 |
| 1720.500000 | --- | 33.66 | 100.0 | H | 155.0 | -4.7 | 20.34 | 54.00 |
| 1898.500000 | 45.80 | --- | 200.0 | V | 290.0 | -3.7 | 28.20 | 74.00 |
| 1920.000000 | --- | 36.57 | 200.0 | V | 330.0 | -3.6 | 17.43 | 54.00 |
| 2166.500000 | --- | 35.22 | 200.0 | V | 222.0 | -2.6 | 18.78 | 54.00 |
| 2290.750000 | 46.10 | --- | 100.0 | V | 88.0 | -2.0 | 27.90 | 74.00 |
| 2726.250000 | 47.07 | --- | 200.0 | V | 212.0 | -0.3 | 26.93 | 74.00 |
| 2760.250000 | --- | 36.95 | 100.0 | V | 218.0 | -0.1 | 17.05 | 54.00 |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

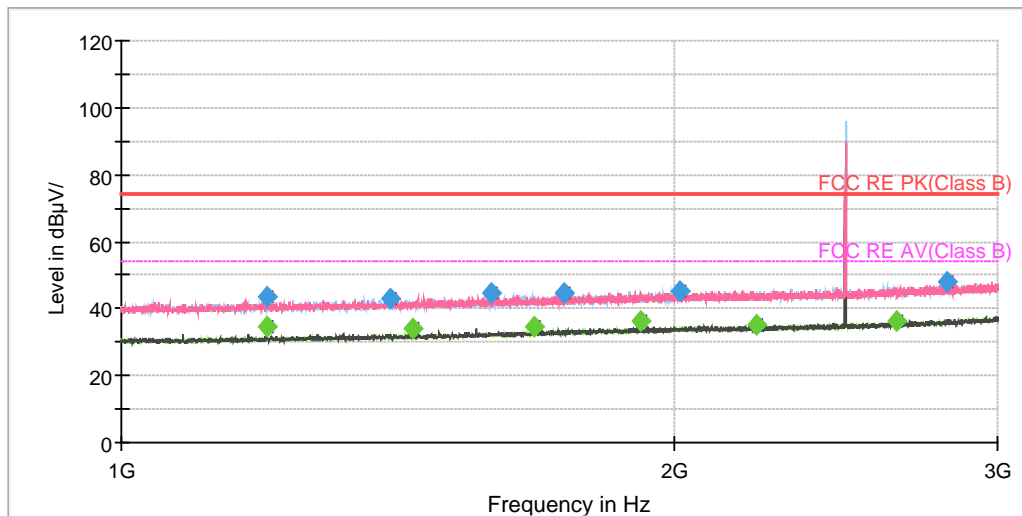BLE-Channel 39

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

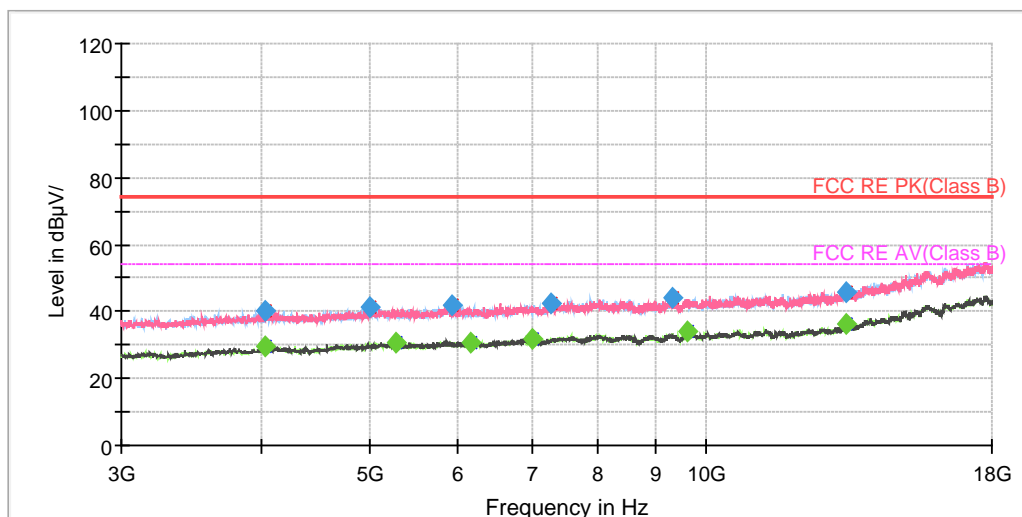

Radiates Emission from 3GHz to 18GHz



| Frequency (MHz) | MaxPeak (dB μ V/m) | Average (dB μ V/m) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) | Margin (dB) | Limit (dB μ V/m) |
|-----------------|------------------------|------------------------|-------------|-----|---------------|--------------|-------------|----------------------|
| 1200.000000 | --- | 34.55 | 200.0 | V | 352.0 | -7.6 | 19.45 | 54.00 |
| 1200.500000 | 43.52 | --- | 100.0 | V | 141.0 | -7.6 | 30.48 | 74.00 |
| 1400.000000 | 43.21 | --- | 200.0 | V | 355.0 | -6.5 | 30.79 | 74.00 |
| 1440.000000 | --- | 33.95 | 100.0 | V | 29.0 | -6.3 | 20.05 | 54.00 |
| 1590.750000 | 44.82 | --- | 200.0 | V | 290.0 | -5.5 | 29.18 | 74.00 |
| 1680.000000 | --- | 34.46 | 200.0 | V | 139.0 | -4.9 | 19.54 | 54.00 |
| 1742.000000 | 44.70 | --- | 200.0 | H | 75.0 | -4.6 | 29.30 | 74.00 |
| 1920.000000 | --- | 36.53 | 200.0 | V | 342.0 | -3.6 | 17.47 | 54.00 |
| 2012.750000 | 45.47 | --- | 200.0 | H | 163.0 | -3.1 | 28.53 | 74.00 |
| 2216.750000 | --- | 35.17 | 100.0 | V | 284.0 | -2.4 | 18.83 | 54.00 |
| 2640.500000 | --- | 36.34 | 200.0 | V | 125.0 | -0.6 | 17.66 | 54.00 |
| 2818.000000 | 48.08 | --- | 200.0 | H | 19.0 | 0.3 | 25.92 | 74.00 |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

5.3. Conducted Emission

Ambient condition


| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 23°C ~25°C | 45%~50% | 101.5kPa |

Methods of Measurement

The EUT is placed on a non-metallic table of 80cm height above the horizontal metal reference ground plane. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.10-2013. Connect the AC power line of the EUT to the L.I.S.N. Use EMI receiver to detect the average and Quasi-peak value. RBW is set to 9 kHz, VBW is set to 30kHz. The measurement result should include both L line and N line.

The test is in transmitting mode.

Test Setup

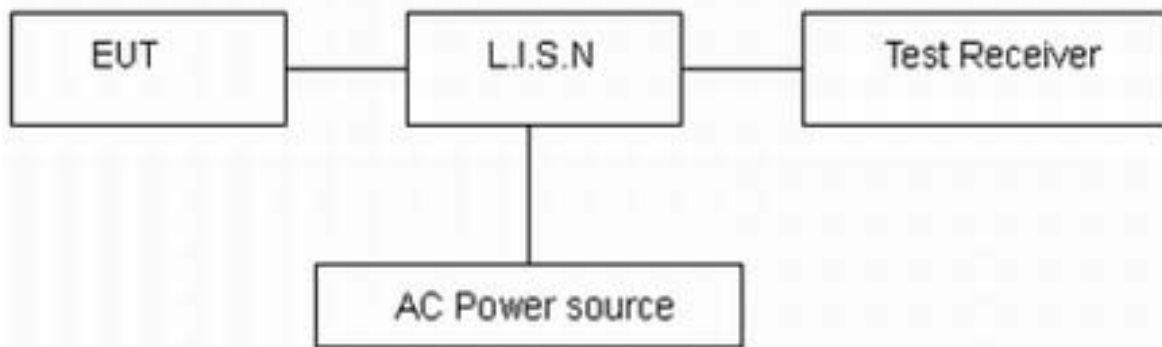

Note: AC Power source is used to change the voltage 110V/60Hz.

Limits

| Frequency (MHz) | Conducted Limits(dBμV) | |
|-----------------|------------------------|------------|
| | Quasi-peak | Average |
| 0.15 - 0.5 | 66 to 56 * | 56 to 46 * |
| 0.5 - 5 | 56 | 46 |
| 5 - 30 | 60 | 50 |

*: Decreases with the logarithm of the frequency.


Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U = 2.69$ dB.

Test Results:

Following plots, Blue trace uses the peak detection and Green trace uses the average detection. During the test, the Conducted Emission was performed in all modes (WIFI 2.4G /BLE) with all channels, 802.11n (HT20) CH1 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.

SC600T-WF:

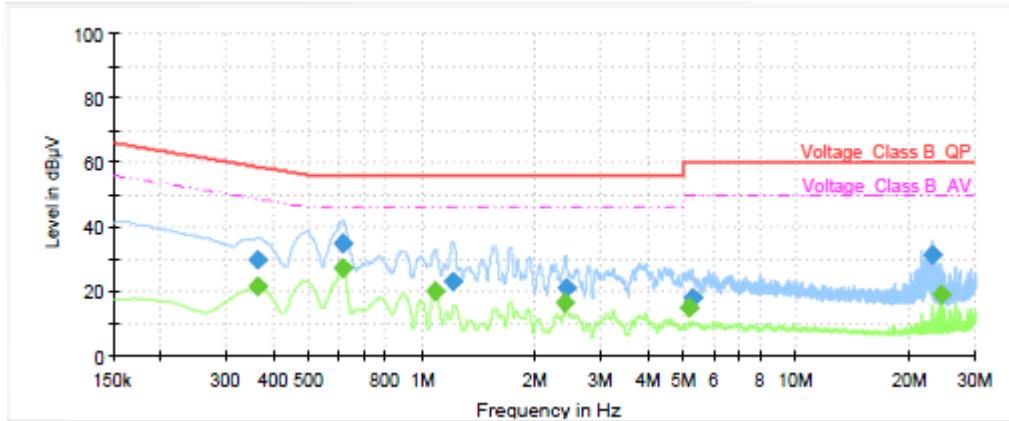


Conducted Emission from 150 KHz to 30 MHz

| Frequency (MHz) | QuasiPeak (dBµV) | Average (dBµV) | Limit (dBµV) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Line | Filter | Corr. (dB) |
|-----------------|------------------|----------------|--------------|-------------|-----------------|-----------------|------|--------|------------|
| 0.36 | --- | 21.37 | 48.69 | 27.32 | 1000.0 | 9.000 | L1 | ON | 19.19 |
| 0.36 | 29.97 | --- | 58.69 | 28.72 | 1000.0 | 9.000 | L1 | ON | 19.19 |
| 0.61 | --- | 27.27 | 46.00 | 18.73 | 1000.0 | 9.000 | L1 | ON | 19.27 |
| 0.61 | 34.66 | --- | 56.00 | 21.34 | 1000.0 | 9.000 | L1 | ON | 19.27 |
| 1.09 | --- | 19.85 | 46.00 | 26.15 | 1000.0 | 9.000 | L1 | ON | 19.24 |
| 1.21 | 22.88 | --- | 56.00 | 33.12 | 1000.0 | 9.000 | L1 | ON | 19.23 |
| 2.41 | --- | 16.21 | 46.00 | 29.79 | 1000.0 | 9.000 | L1 | ON | 19.03 |
| 2.42 | 21.00 | --- | 56.00 | 35.00 | 1000.0 | 9.000 | L1 | ON | 19.03 |
| 5.17 | --- | 15.01 | 50.00 | 34.99 | 1000.0 | 9.000 | L1 | ON | 19.09 |
| 5.29 | 17.93 | --- | 60.00 | 42.07 | 1000.0 | 9.000 | L1 | ON | 19.09 |
| 23.13 | 31.09 | --- | 60.00 | 28.91 | 1000.0 | 9.000 | L1 | ON | 19.63 |
| 24.35 | --- | 19.22 | 50.00 | 30.78 | 1000.0 | 9.000 | L1 | ON | 19.72 |

Remark: Correct factor=cable loss + LISN factor

L line

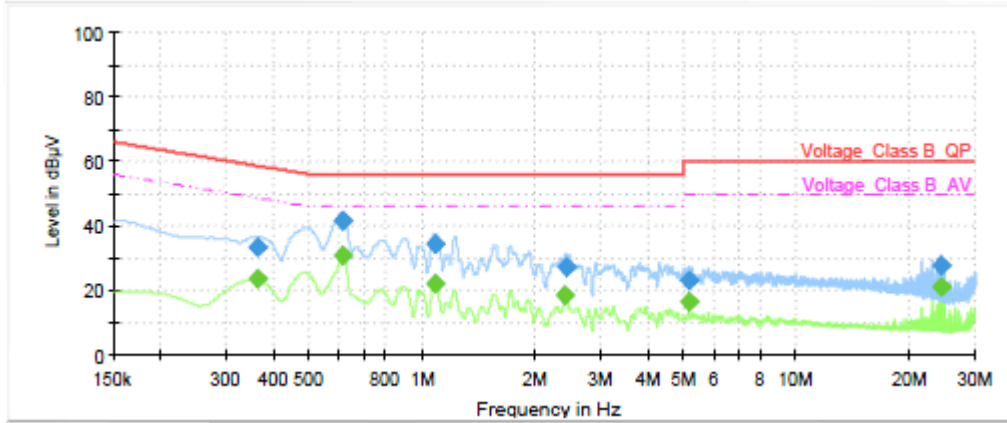

Conducted Emission from 150 KHz to 30 MHz

| Frequency (MHz) | QuasiPeak (dBµV) | Average (dBµV) | Limit (dBµV) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Line | Filter | Corr. (dB) |
|-----------------|------------------|----------------|--------------|-------------|-----------------|-----------------|------|--------|------------|
| 0.36 | --- | 23.61 | 48.69 | 25.09 | 1000.0 | 9.000 | N | ON | 19.19 |
| 0.36 | 33.19 | --- | 58.69 | 25.50 | 1000.0 | 9.000 | N | ON | 19.19 |
| 0.61 | --- | 30.61 | 46.00 | 15.39 | 1000.0 | 9.000 | N | ON | 19.27 |
| 0.61 | 41.59 | --- | 56.00 | 14.41 | 1000.0 | 9.000 | N | ON | 19.27 |
| 1.08 | 34.19 | --- | 56.00 | 21.81 | 1000.0 | 9.000 | N | ON | 19.24 |
| 1.08 | --- | 22.15 | 46.00 | 23.85 | 1000.0 | 9.000 | N | ON | 19.24 |
| 2.41 | --- | 18.22 | 46.00 | 27.78 | 1000.0 | 9.000 | N | ON | 19.03 |
| 2.42 | 27.18 | --- | 56.00 | 28.82 | 1000.0 | 9.000 | N | ON | 19.03 |
| 5.15 | --- | 16.53 | 50.00 | 33.47 | 1000.0 | 9.000 | N | ON | 19.09 |
| 5.16 | 22.93 | --- | 60.00 | 37.07 | 1000.0 | 9.000 | N | ON | 19.09 |
| 24.35 | --- | 20.99 | 50.00 | 29.01 | 1000.0 | 9.000 | N | ON | 19.60 |
| 24.35 | 27.67 | --- | 60.00 | 32.33 | 1000.0 | 9.000 | N | ON | 19.60 |

Remark: Correct factor=cable loss + LISN factor

N line



6. Main Test Instruments

| Name | Manufacturer | Type | Serial Number | Calibration Date | Expiration Date |
|--------------------------------------|----------------------|-------------|---------------|------------------|-----------------|
| Spectrum Analyzer | R&S | FSV30 | 100815 | 2018-12-16 | 2019-12-15 |
| EMI Test Receiver | R&S | ESCI | 100948 | 2019-05-19 | 2020-05-18 |
| Loop Antenna | SCHWARZBECK | FMZB1519 | 1519-047 | 2019-09-26 | 2021-09-25 |
| TRILOG Broadband Antenna | Schwarzbeck | VULB 9163 | 9163-201 | 2017-11-18 | 2019-11-17 |
| Double Ridged Waveguide Horn Antenna | R&S | HF907 | 100126 | 2018-07-07 | 2020-07-06 |
| Standard Gain Horn | ETS-Lindgren | 3160-09 | 00102643 | 2018-06-20 | 2020-06-19 |
| EMI Test Receiver | R&S | ESR | 101667 | 2019-05-19 | 2020-05-18 |
| LISN | R&S | ENV216 | 101171 | 2016-12-16 | 2019-12-15 |
| Spectrum Analyzer | Agilent | N9010A | MY47191109 | 2019-05-19 | 2020-05-18 |
| Power Meter | R&S | NRP | 104306 | 2019-05-19 | 2020-05-18 |
| Power Sensor | R&S | NRP-Z21 | 104799 | 2019-05-19 | 2020-05-18 |
| 20dB Attenuator | Star River Highlight | UCL-TS2S-20 | 18013001 | 2018-12-16 | 2019-12-15 |
| RF Cable | Agilent | SMA 15cm | 0001 | 2019-09-12 | 2019-12-11 |
| Software | R&S | EMC32 | 9.26.0 | / | / |

*****END OF REPORT *****