


Test Mode	UNII-2C_TX AX(HE80) Mode 5530 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

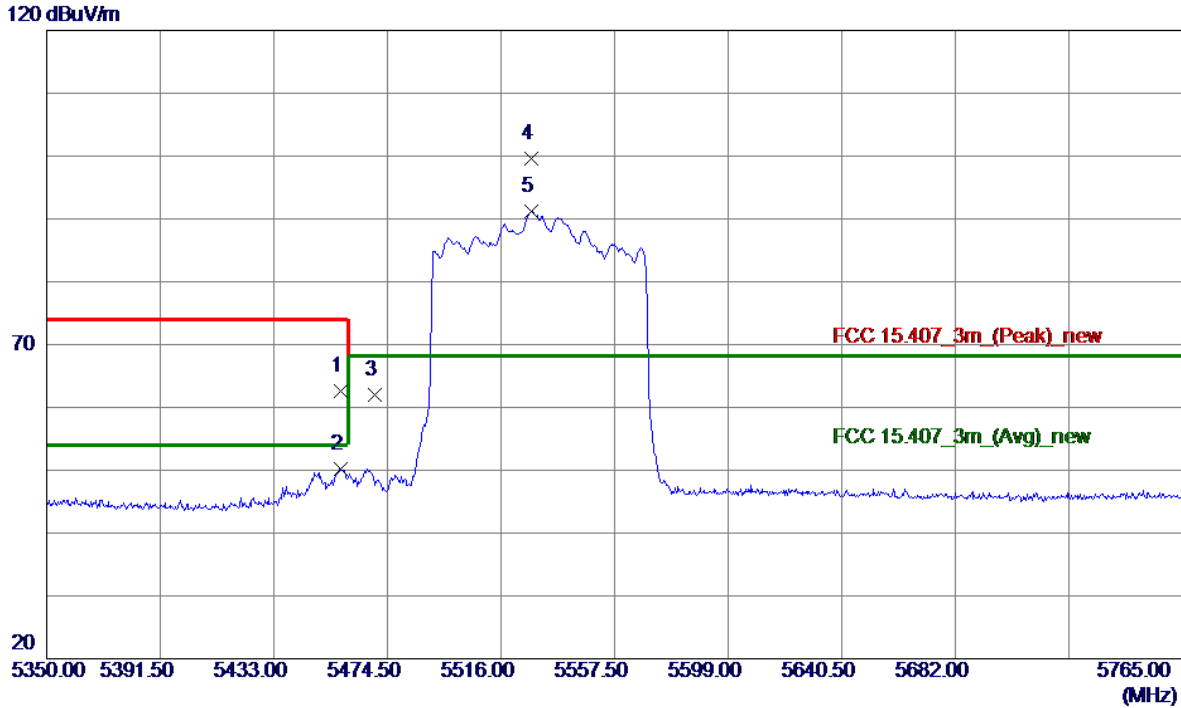


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5457.4850	24.44	38.07	62.51	74.00	-11.49	Peak	
2	5457.4850	12.10	38.07	50.17	54.00	-3.83	AVG	
3	5470.0000	23.98	38.09	62.07	68.20	-6.13	Peak	
4 *	5527.2050	61.42	38.19	99.61	68.20	31.41	Peak	No limit
5	5527.2050	53.01	38.19	91.20	68.20	23.00	AVG	No limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE80) Mode 5530 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

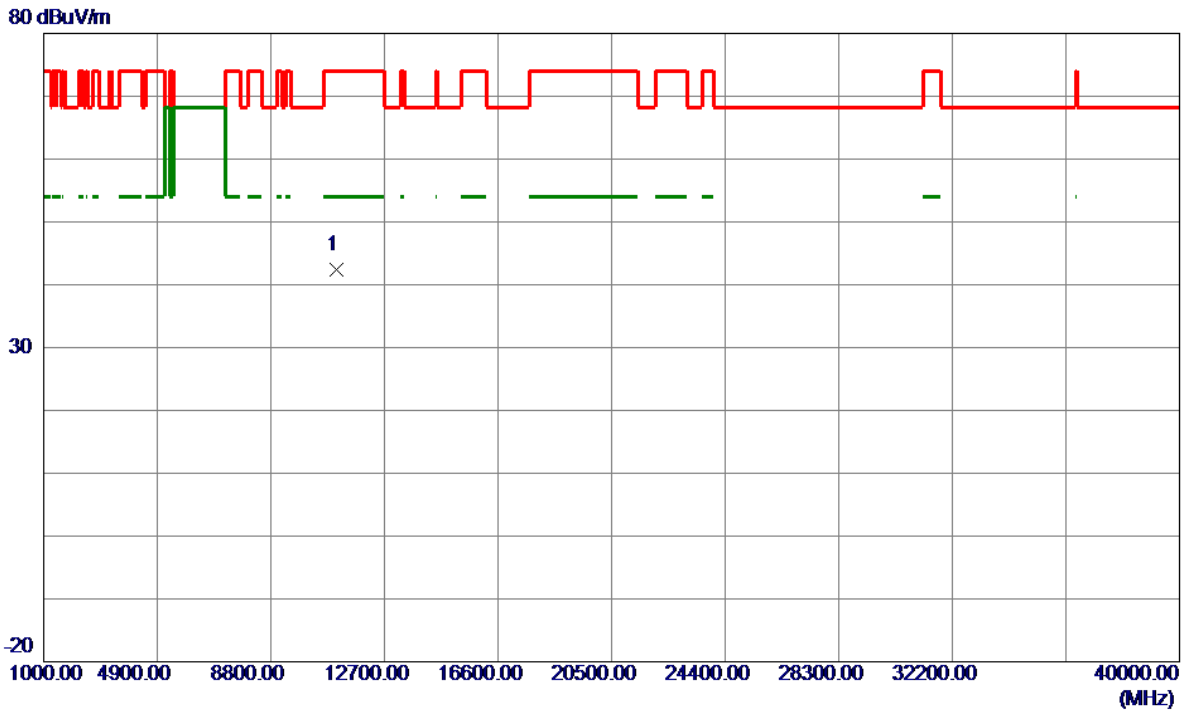


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11060.0000	50.83	-8.52	42.31	74.00	-31.69	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE80) Mode 5530 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

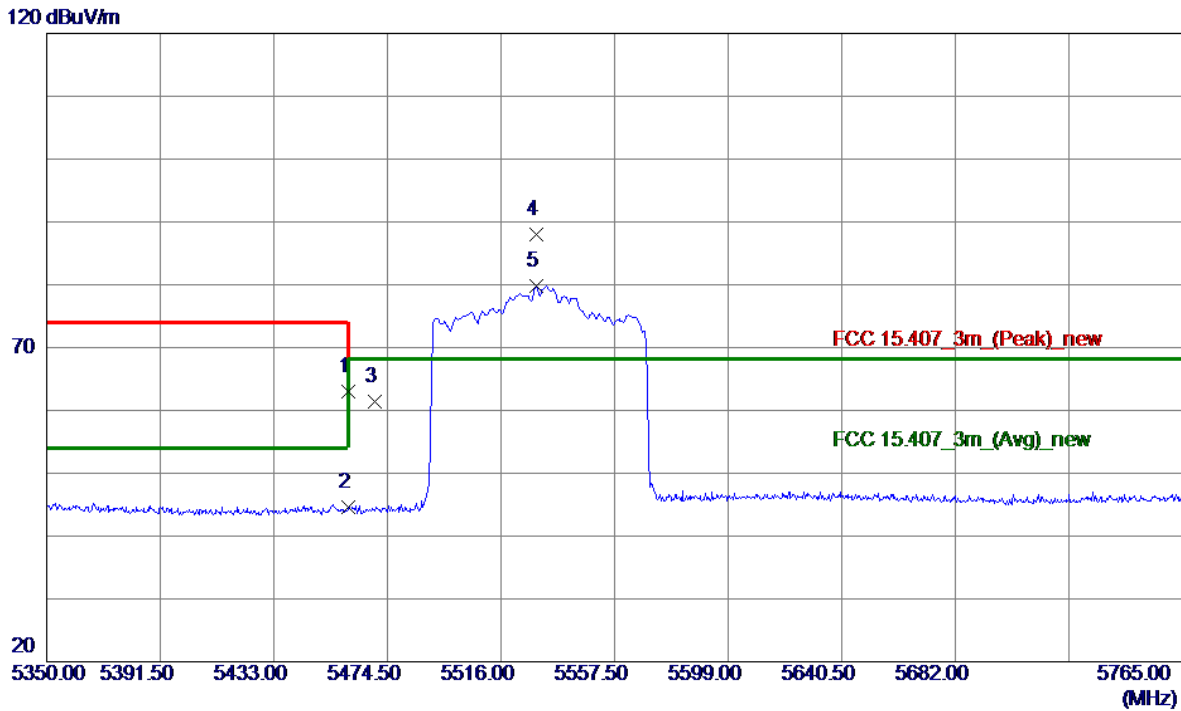


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	24.85	38.07	62.92	74.00	-11.08	Peak	
2	5460.0000	6.50	38.07	44.57	54.00	-9.43	AVG	
3	5470.0000	23.38	38.09	61.47	68.20	-6.73	Peak	
4 *	5528.8650	49.80	38.20	88.00	68.20	19.80	Peak	No limit
5	5528.8650	41.57	38.20	79.77	68.20	11.57	AVG	No limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE80) Mode 5530 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

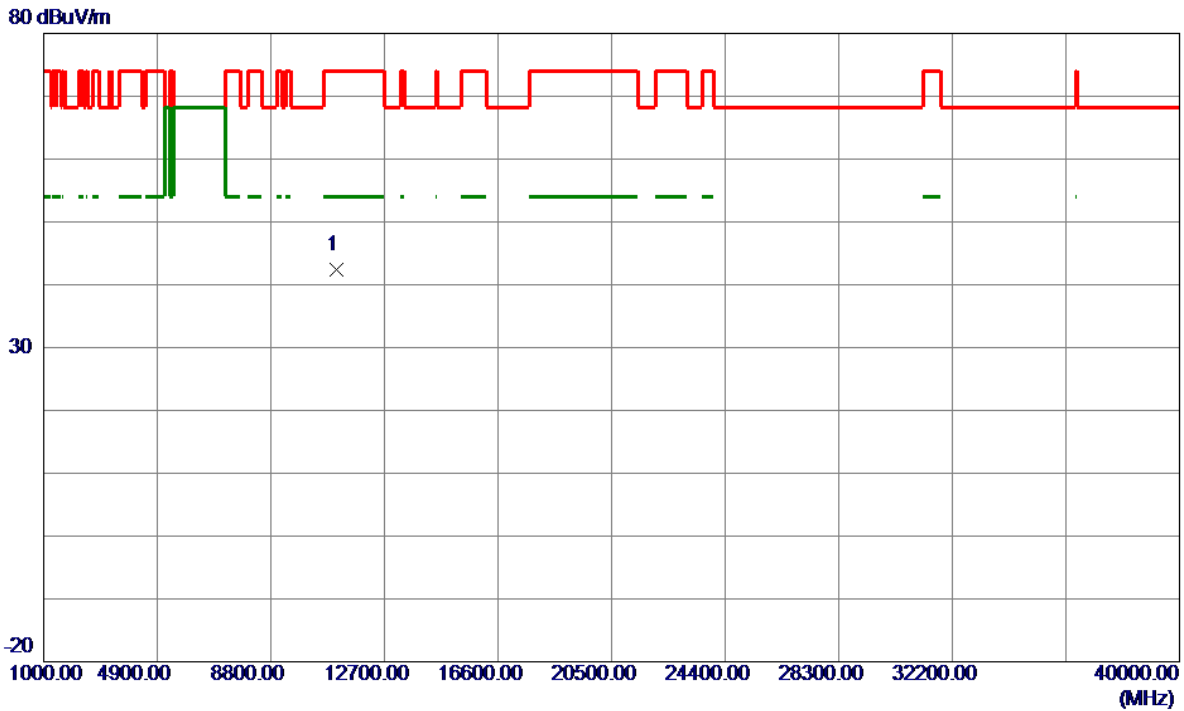


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11060.0000	50.83	-8.52	42.31	74.00	-31.69	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE80) Mode 5610 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

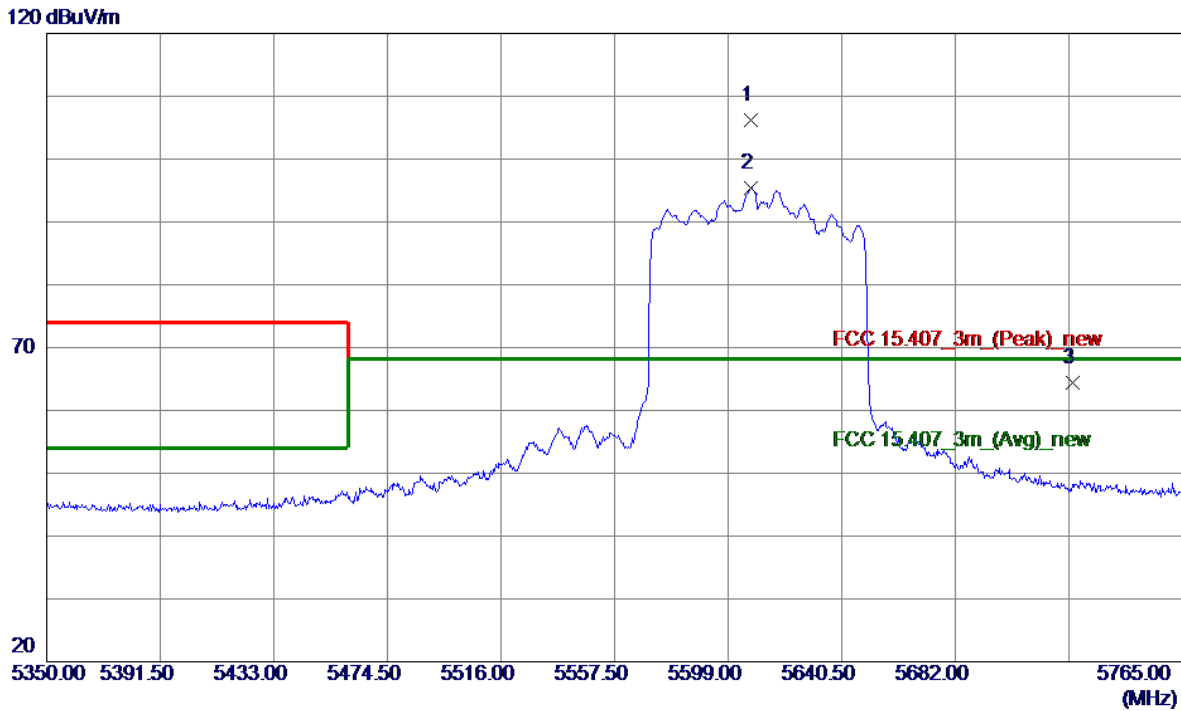


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5607.0920	67.89	38.37	106.26	68.20	38.06	Peak	No limit
2	5607.0920	57.09	38.37	95.46	68.20	27.26	AVG	No limit
3	5725.0000	25.91	38.56	64.47	68.20	-3.73	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE80) Mode 5610 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

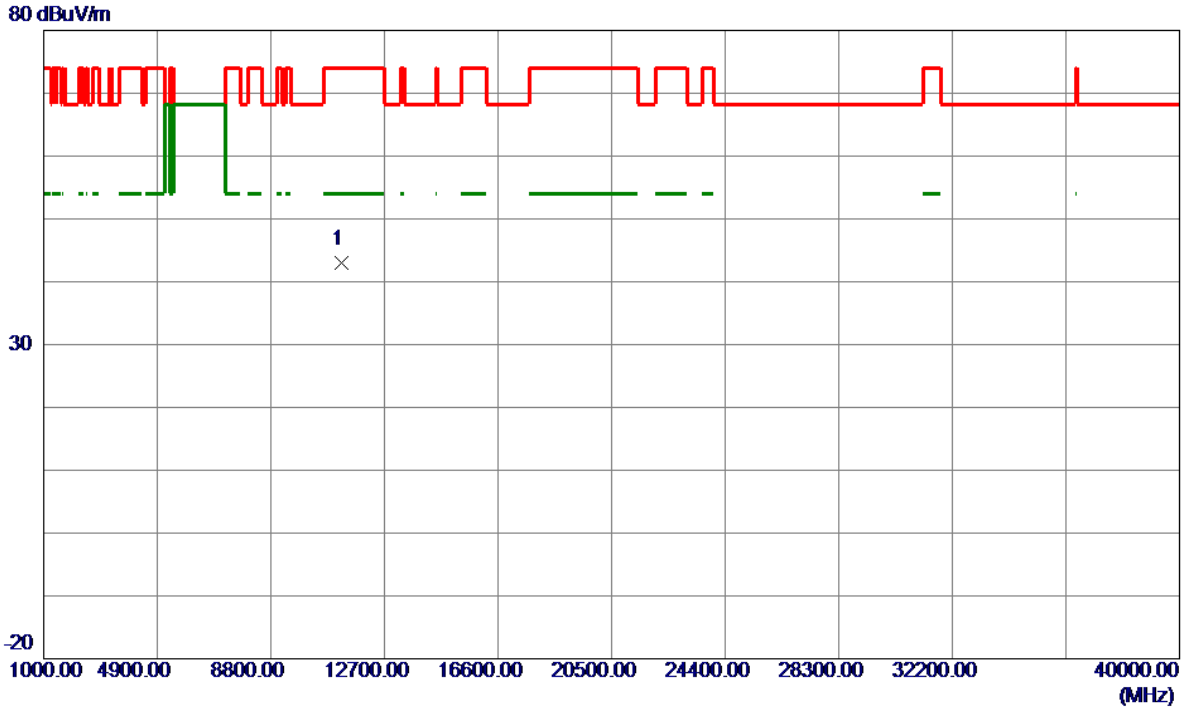


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11220.0000	51.27	-8.37	42.90	74.00	-31.10	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE80) Mode 5610 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

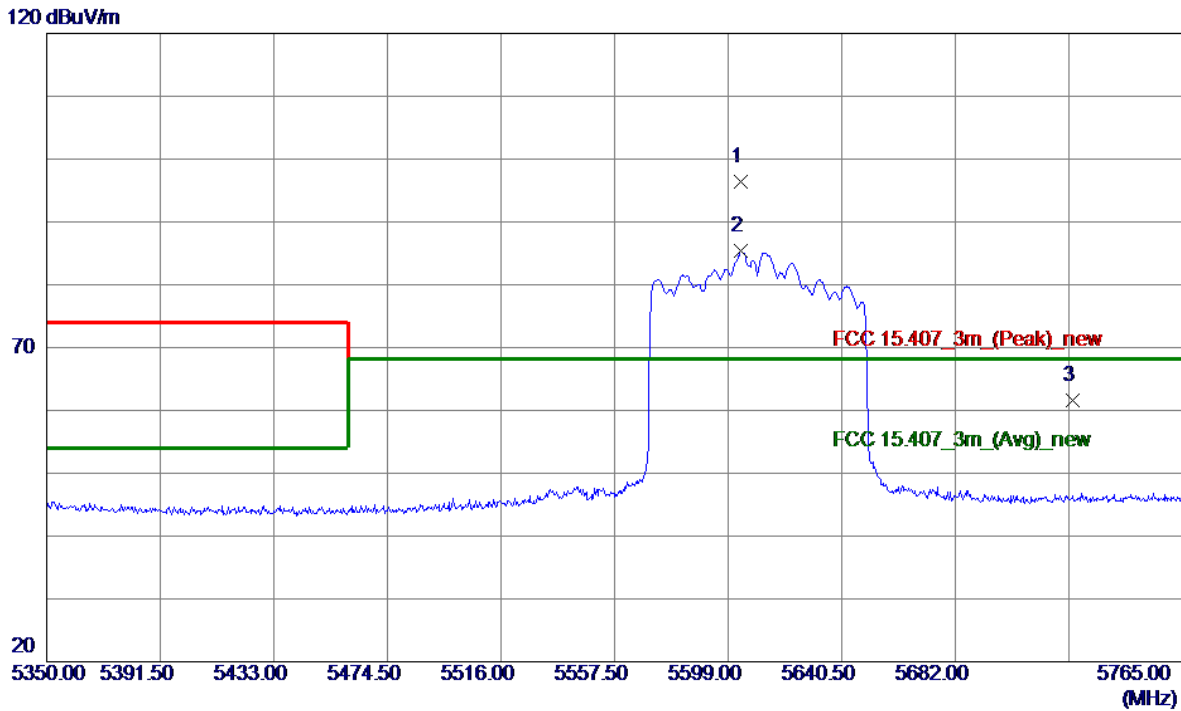


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5603.7730	57.98	38.36	96.34	68.20	28.14	Peak	No limit
2	5603.7730	46.98	38.36	85.34	68.20	17.14	AVG	No limit
3	5725.0000	22.97	38.56	61.53	68.20	-6.67	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE80) Mode 5610 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

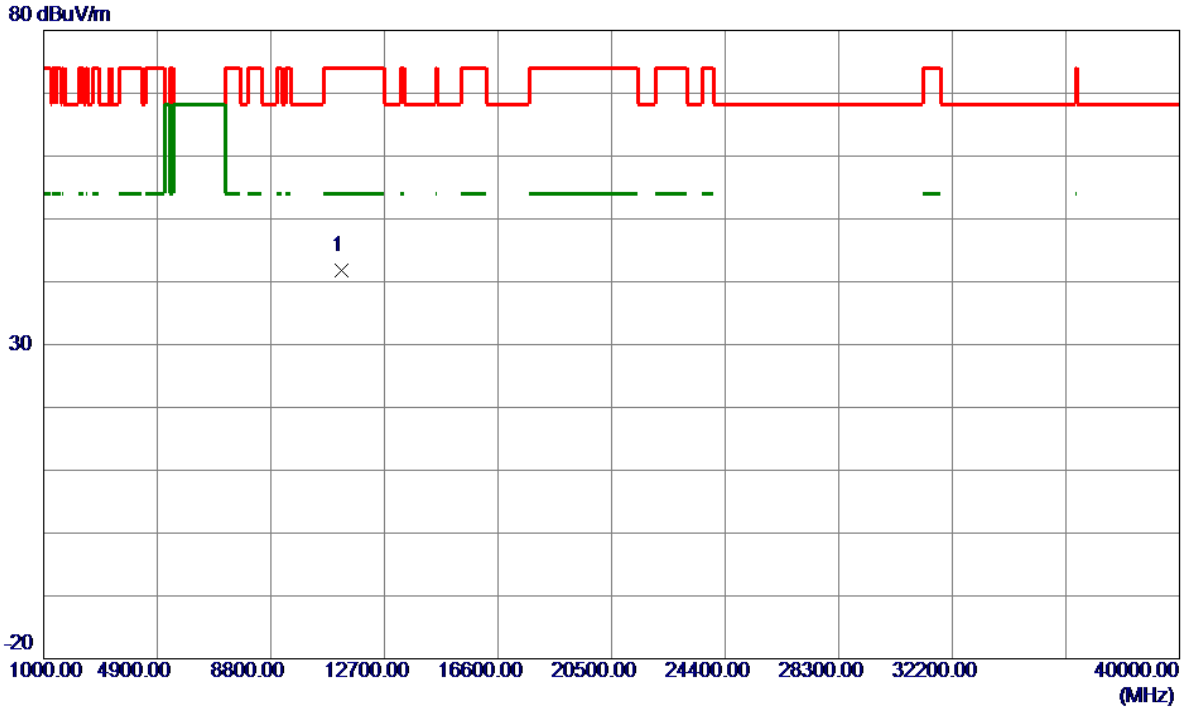


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11220.0000	50.24	-8.37	41.87	74.00	-32.13	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5745 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

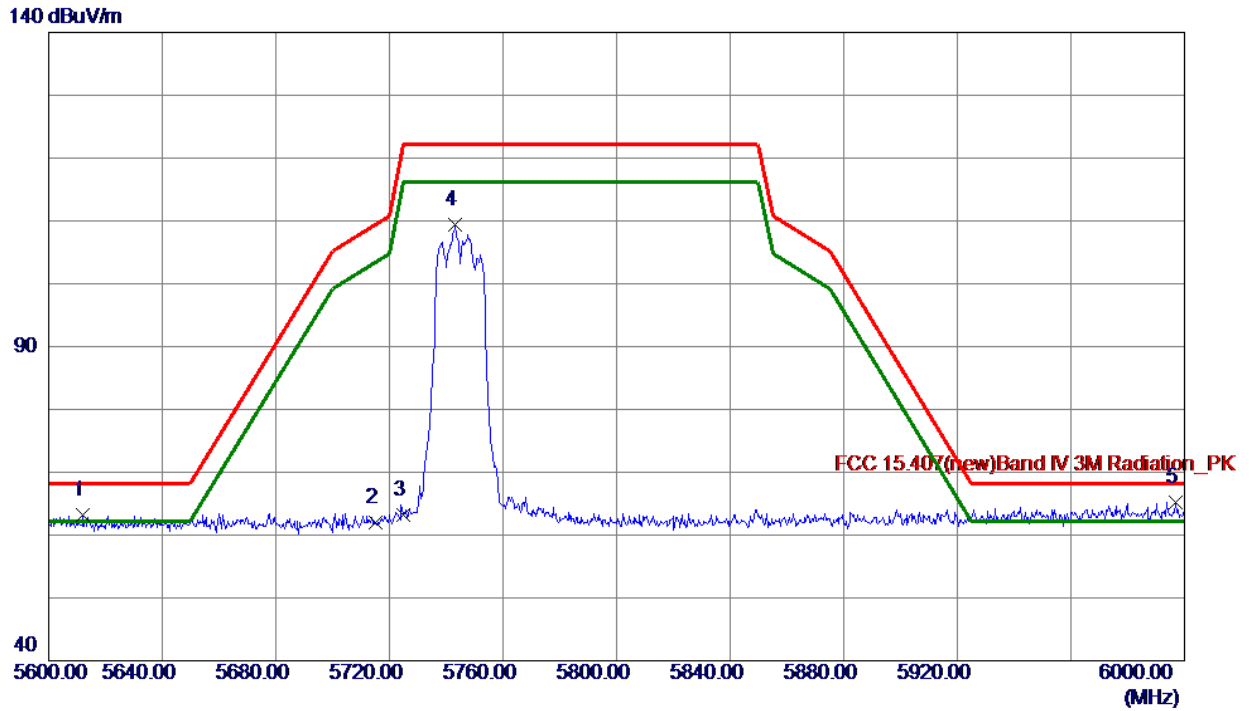


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5612.0000	24.80	38.38	63.18	68.20	-5.02	Peak	
2	5715.0000	23.38	38.55	61.93	109.40	-47.47	Peak	
3	5725.0000	24.68	38.56	63.24	122.20	-58.96	Peak	
4	5743.2000	70.82	38.59	109.41	122.20	-12.79	Peak	
5 *	5996.8000	26.01	39.17	65.18	68.20	-3.02	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5745 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

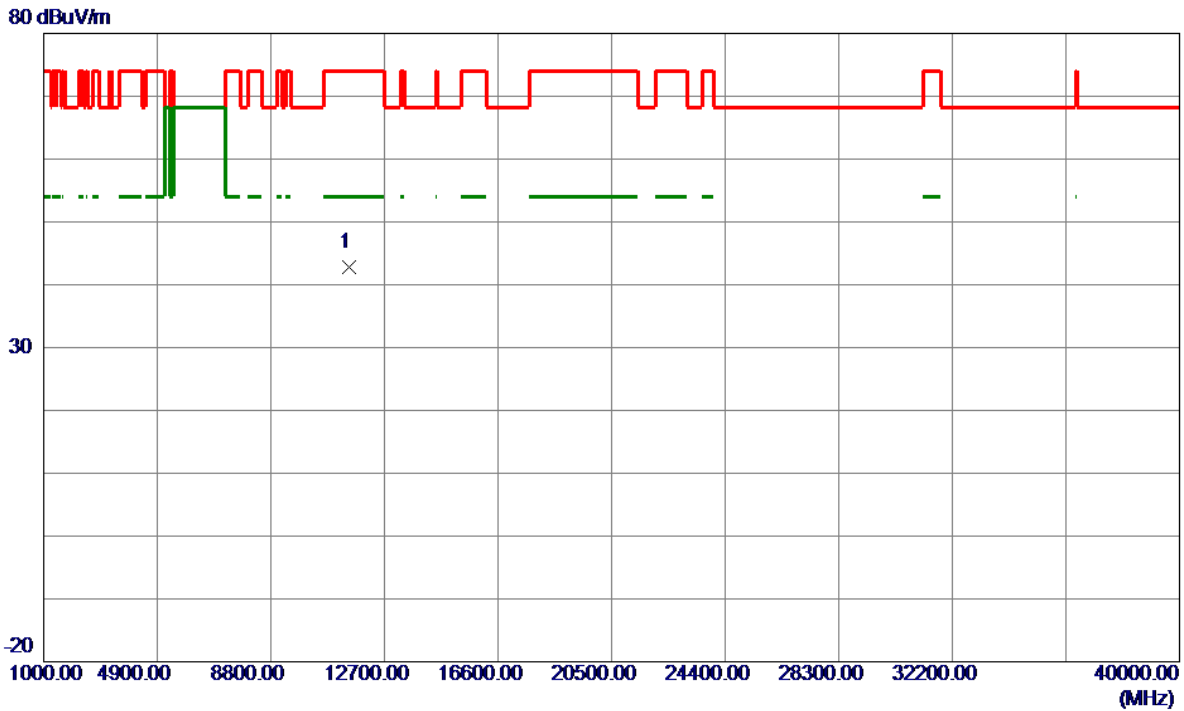


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11490.0000	50.80	-8.02	42.78	74.00	-31.22	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5745 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

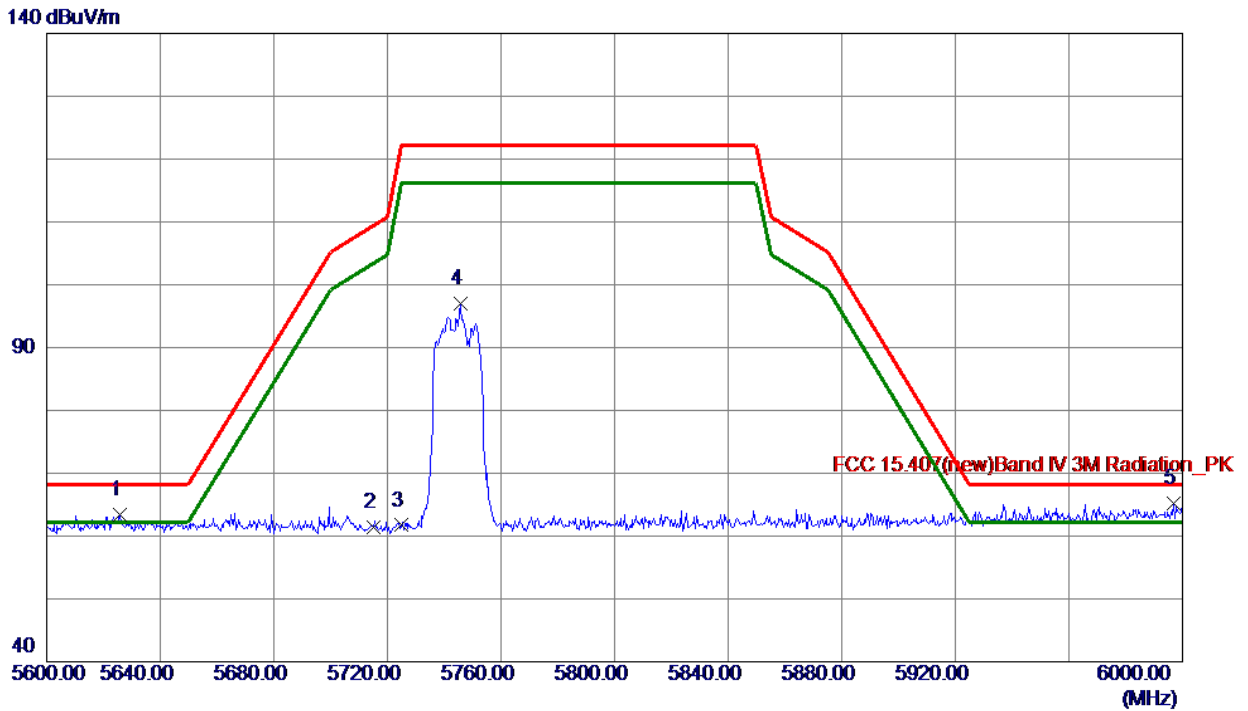


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5625.6000	24.93	38.40	63.33	68.20	-4.87	Peak	
2	5715.0000	22.84	38.55	61.39	109.40	-48.01	Peak	
3	5725.0000	23.14	38.56	61.70	122.20	-60.50	Peak	
4	5745.8000	58.49	38.60	97.09	122.20	-25.11	Peak	
5 *	5997.0000	26.02	39.17	65.19	68.20	-3.01	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5745 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

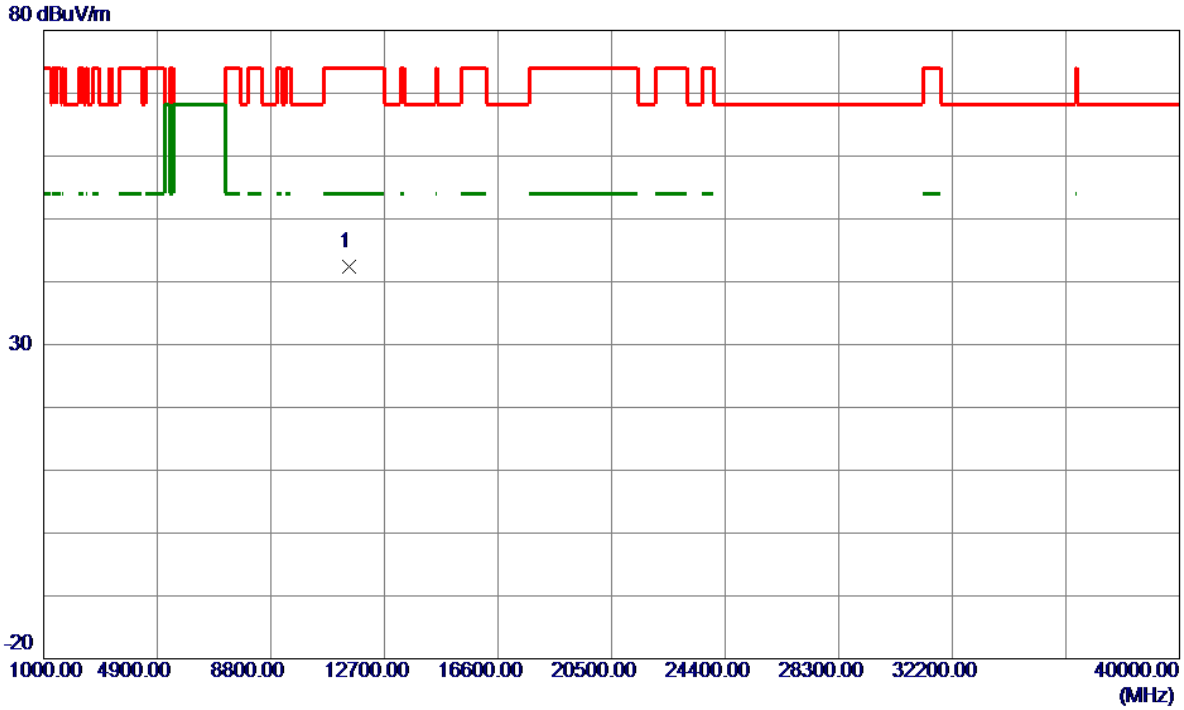


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11490.0000	50.34	-8.02	42.32	74.00	-31.68	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5785 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

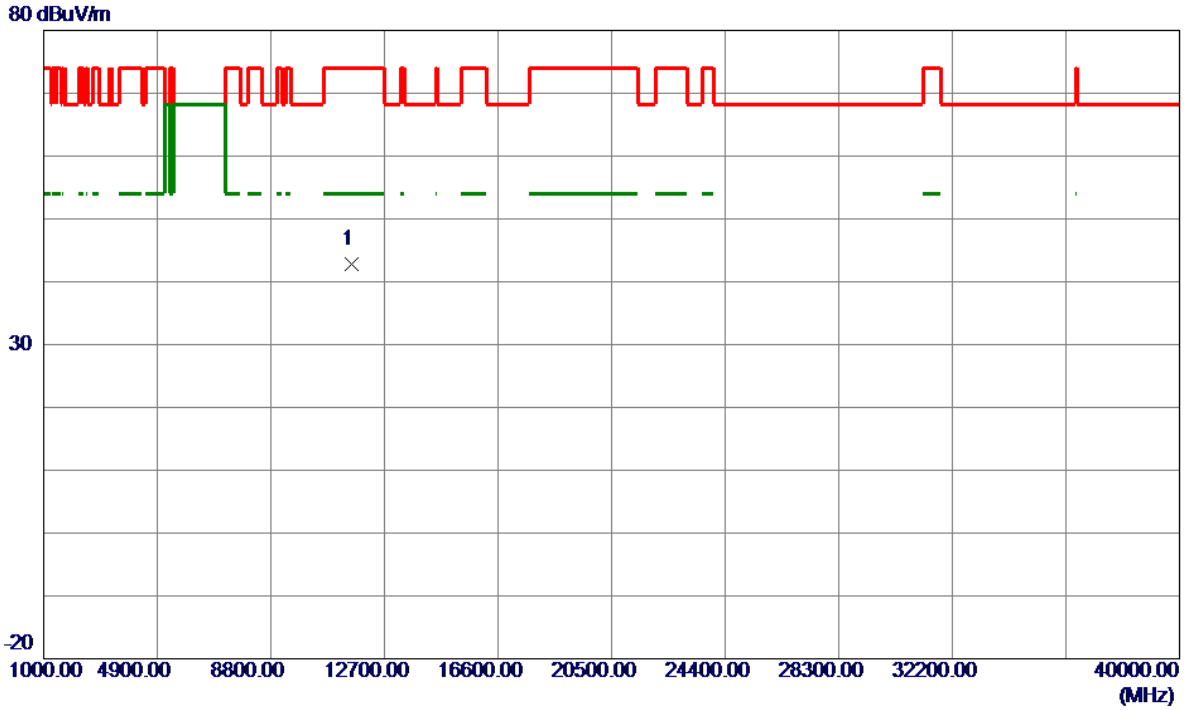


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11570.0000	50.74	-7.98	42.76	74.00	-31.24	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5785 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

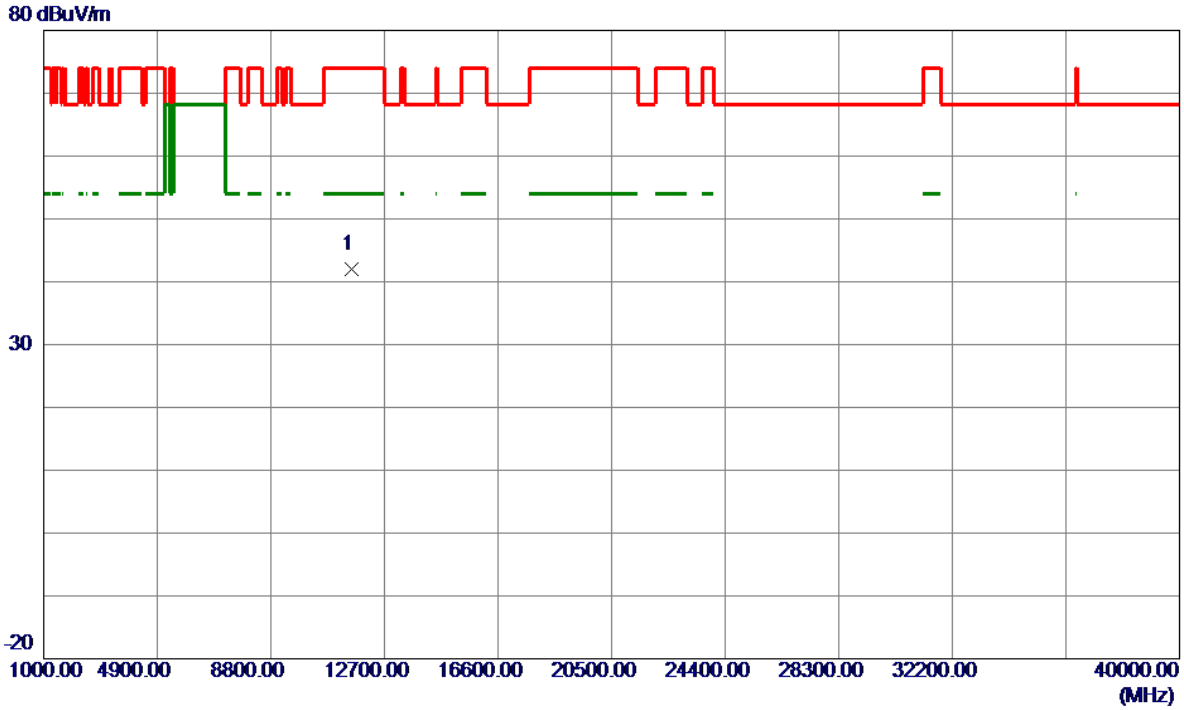


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11570.0000	50.00	-7.98	42.02	74.00	-31.98	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5825 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

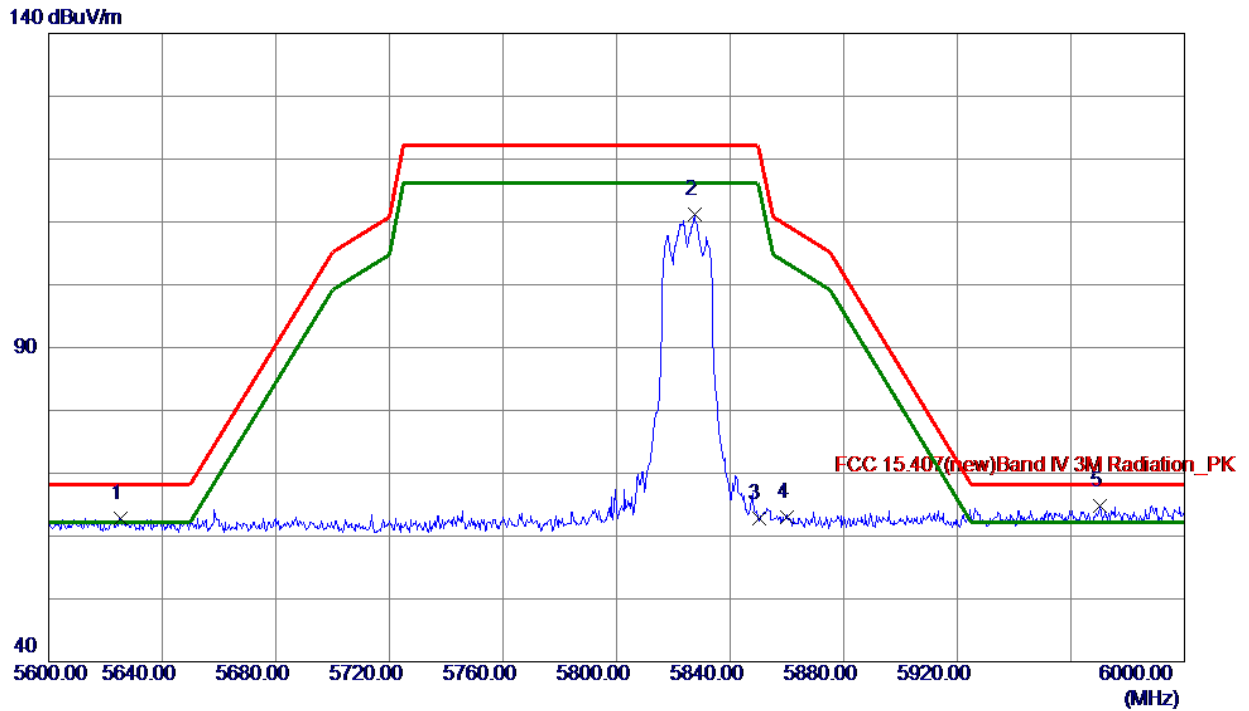


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5625.2000	24.42	38.40	62.82	68.20	-5.38	Peak	
2	5827.4000	72.48	38.75	111.23	122.20	-10.97	Peak	
3	5850.0000	24.05	38.81	62.86	122.20	-59.34	Peak	
4	5860.0000	24.11	38.83	62.94	109.40	-46.46	Peak	
5 *	5970.4000	25.71	39.11	64.82	68.20	-3.38	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5825 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

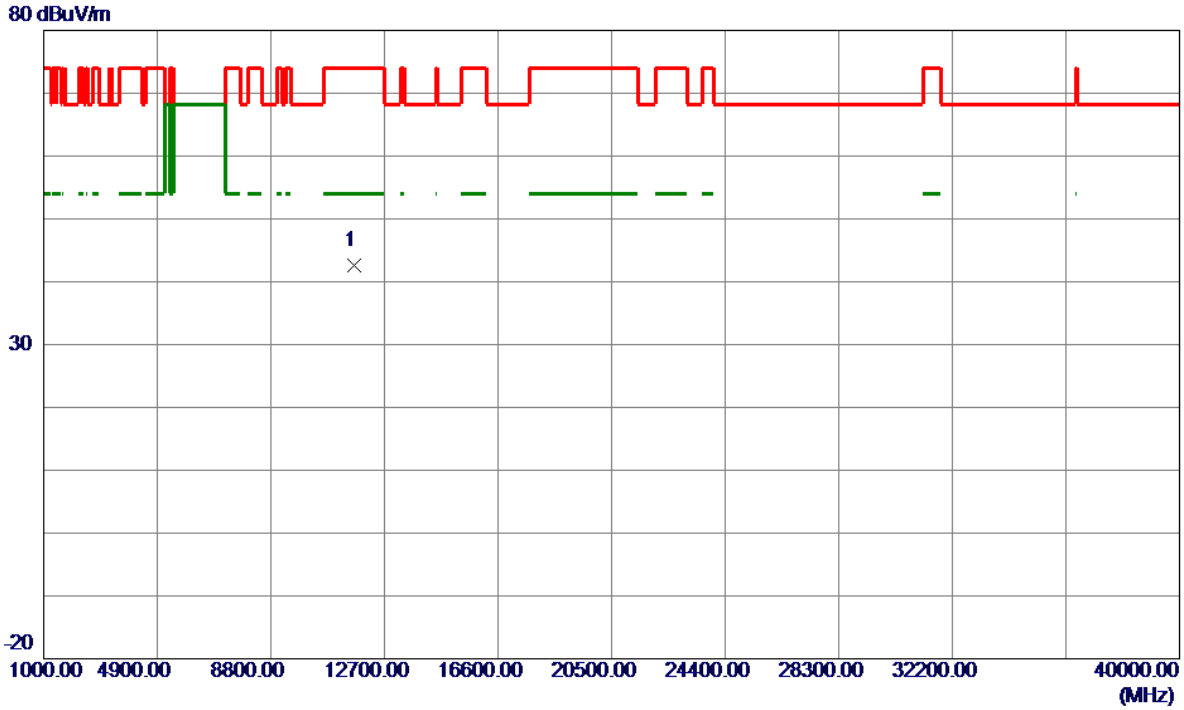


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11650.0000	50.74	-8.06	42.68	74.00	-31.32	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5825 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

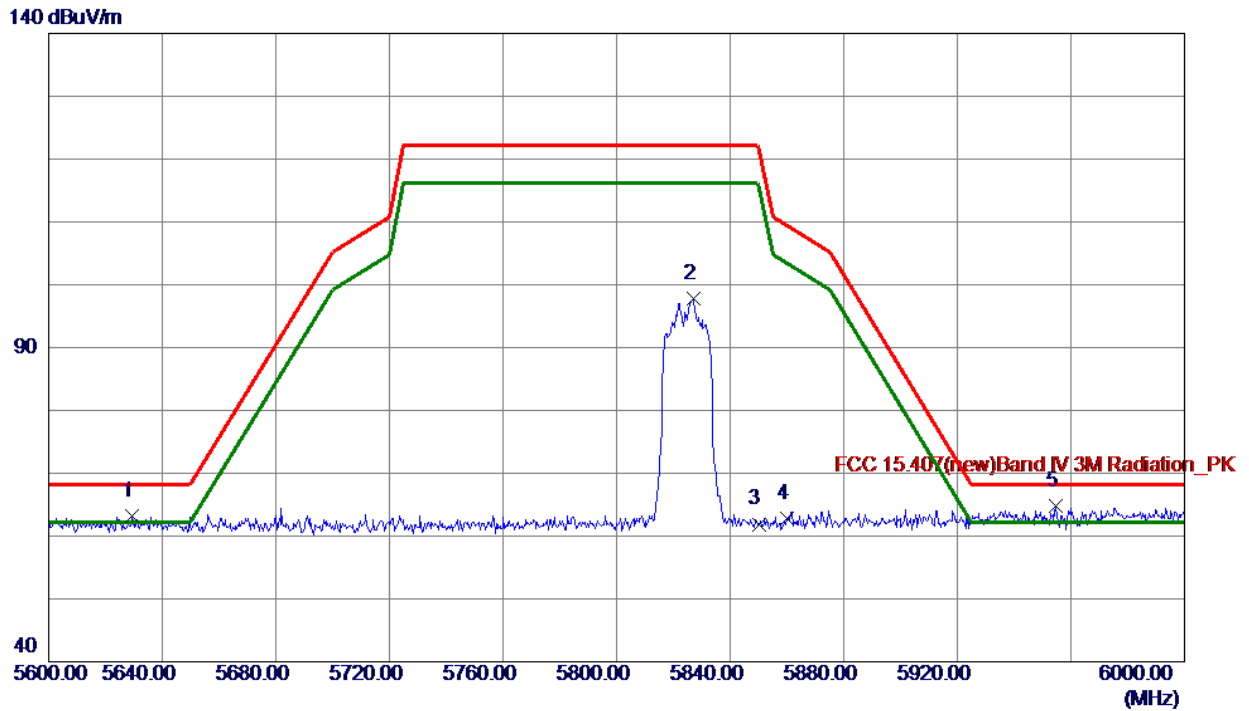


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5629.2000	24.85	38.41	63.26	68.20	-4.94	Peak	
2	5827.0000	59.00	38.75	97.75	122.20	-24.45	Peak	
3	5850.0000	23.09	38.81	61.90	122.20	-60.30	Peak	
4	5860.0000	23.97	38.83	62.80	109.40	-46.60	Peak	
5 *	5954.6000	25.71	39.07	64.78	68.20	-3.42	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5825 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

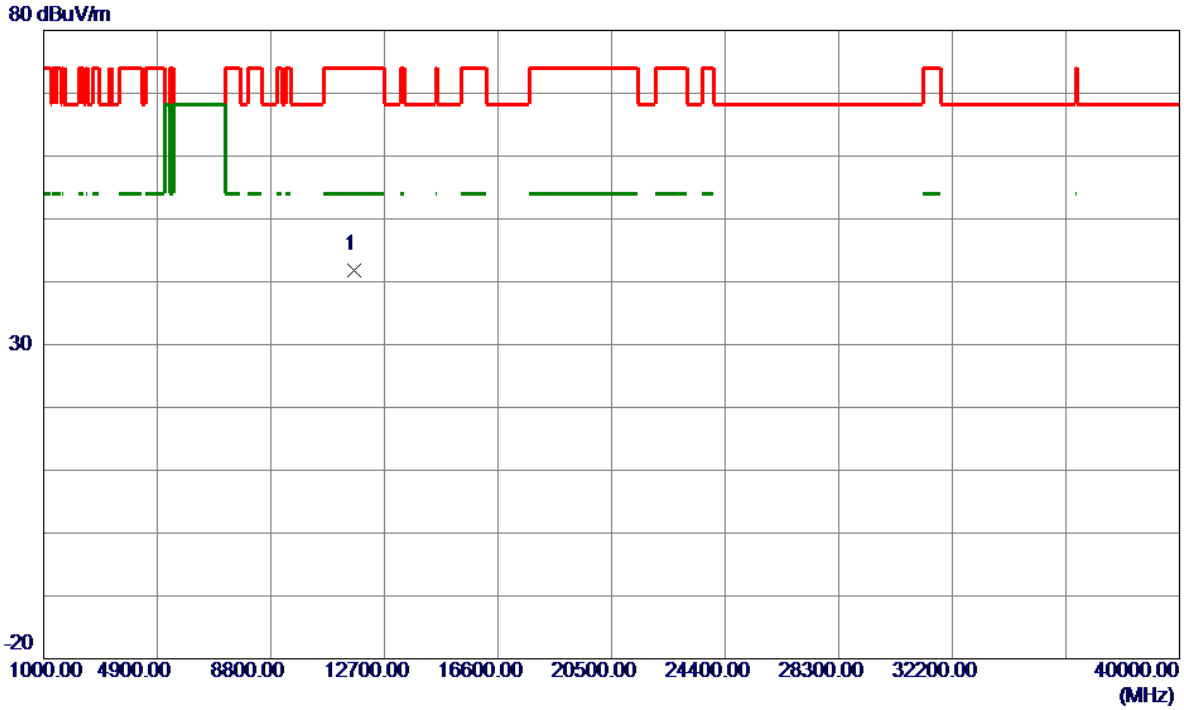


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11650.0000	49.96	-8.06	41.90	74.00	-32.10	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX N(HT20) Mode 5745 MHz	Polarization	Vertical
-----------	---------------------------------	--------------	----------

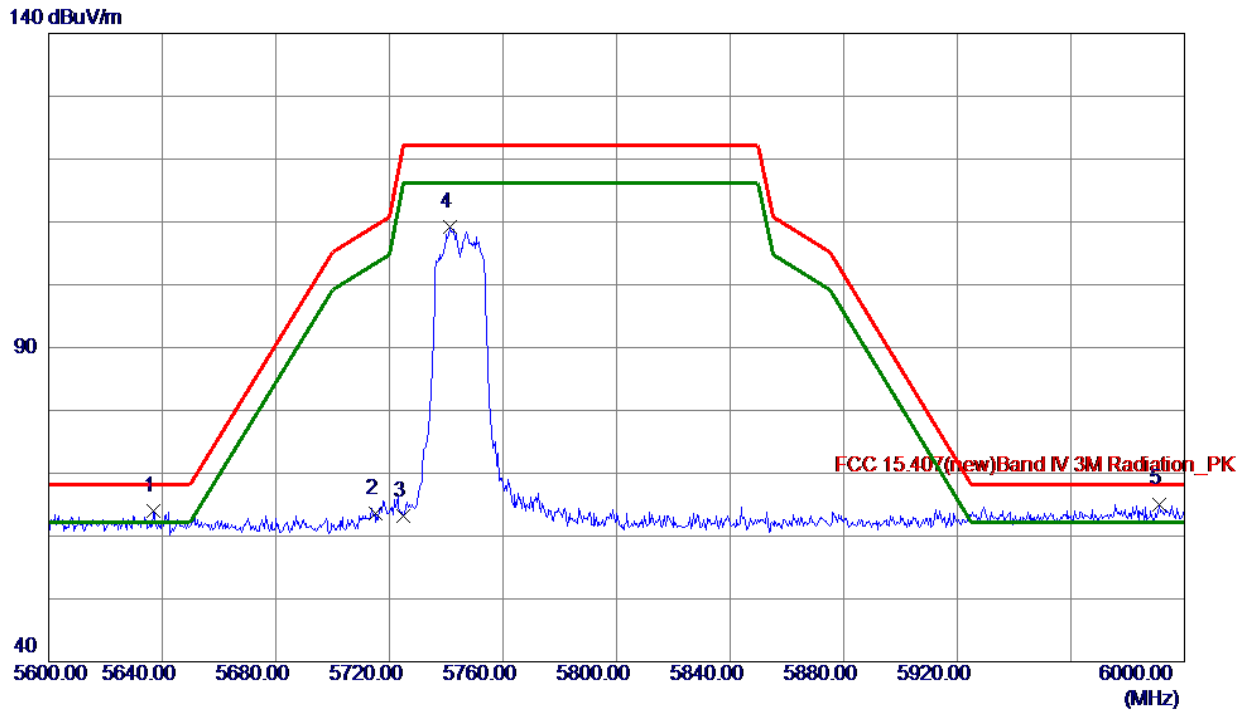

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5637.0000	25.55	38.42	63.97	68.20	-4.23	Peak	
2	5715.0000	24.96	38.55	63.51	109.40	-45.89	Peak	
3	5725.0000	24.68	38.56	63.24	122.20	-58.96	Peak	
4	5741.2000	70.55	38.59	109.14	122.20	-13.06	Peak	
5 *	5991.2000	25.94	39.16	65.10	68.20	-3.10	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX N(HT20) Mode 5745 MHz	Polarization	Vertical
-----------	---------------------------------	--------------	----------




No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11490.0000	50.15	-8.02	42.13	74.00	-31.87	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX N(HT20) Mode 5745 MHz	Polarization	Horizontal
-----------	---------------------------------	--------------	------------

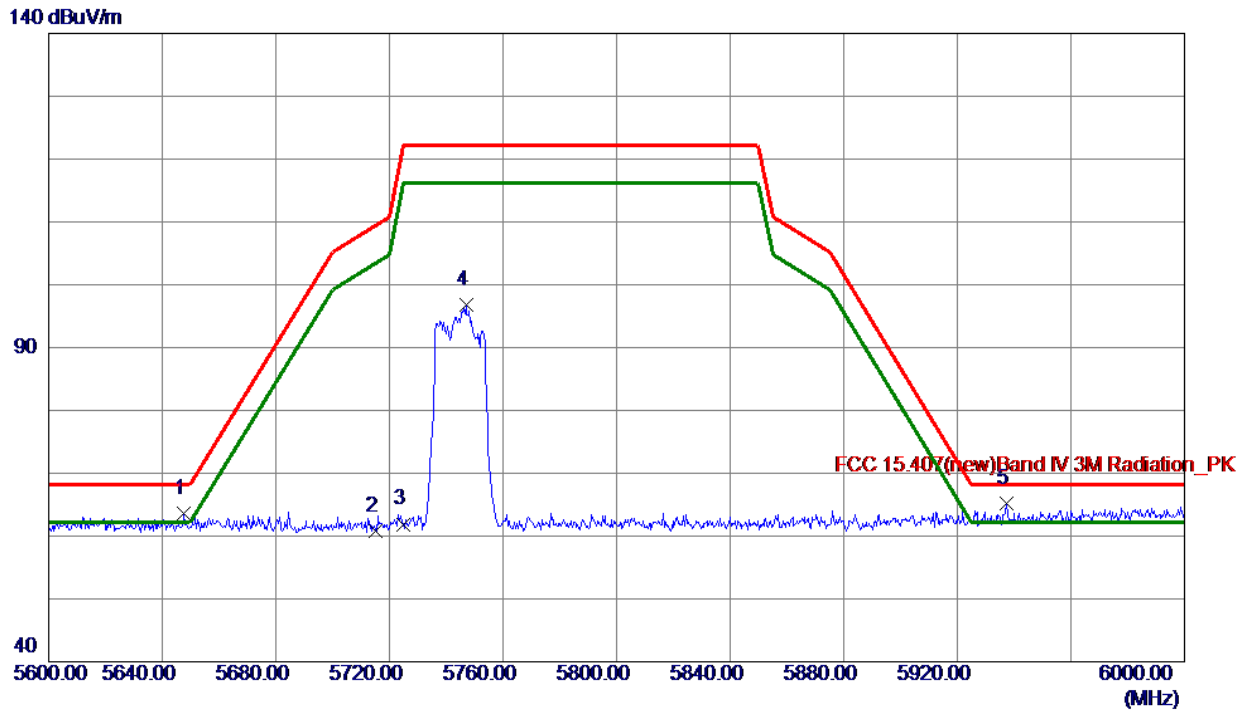


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5647.4000	25.25	38.44	63.69	68.20	-4.51	Peak	
2	5715.0000	22.31	38.55	60.86	109.40	-48.54	Peak	
3	5725.0000	23.34	38.56	61.90	122.20	-60.30	Peak	
4	5747.0000	58.15	38.60	96.75	122.20	-25.45	Peak	
5 *	5937.4000	26.14	39.02	65.16	68.20	-3.04	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX N(HT20) Mode 5745 MHz	Polarization	Horizontal
-----------	---------------------------------	--------------	------------

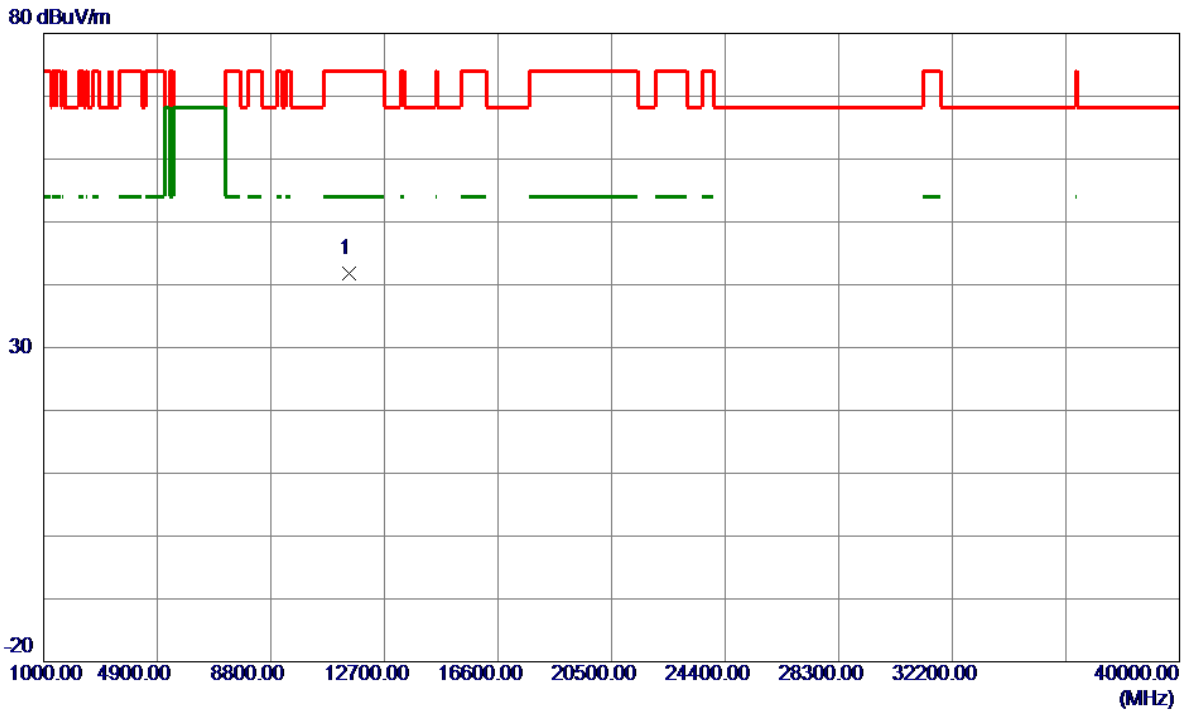


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11490.0000	49.81	-8.02	41.79	74.00	-32.21	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX N(HT20) Mode 5785 MHz	Polarization	Vertical
-----------	---------------------------------	--------------	----------

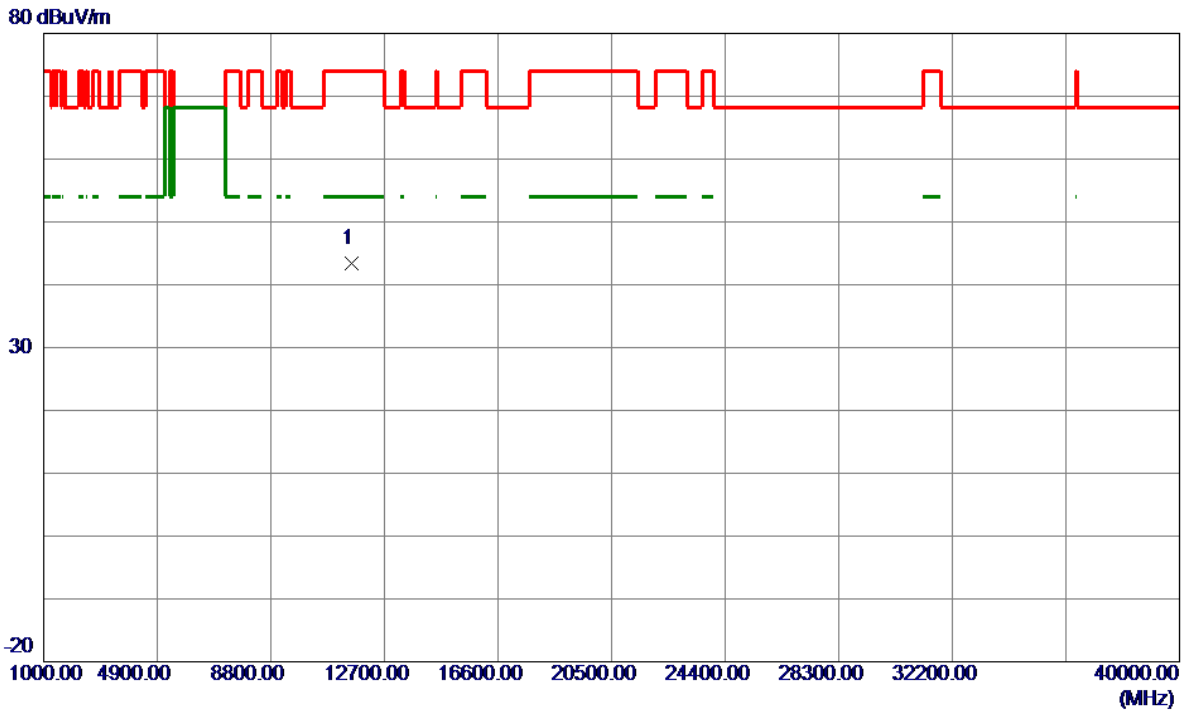


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11570.0000	51.42	-7.98	43.44	74.00	-30.56	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX N(HT20) Mode 5785 MHz	Polarization	Horizontal
-----------	---------------------------------	--------------	------------

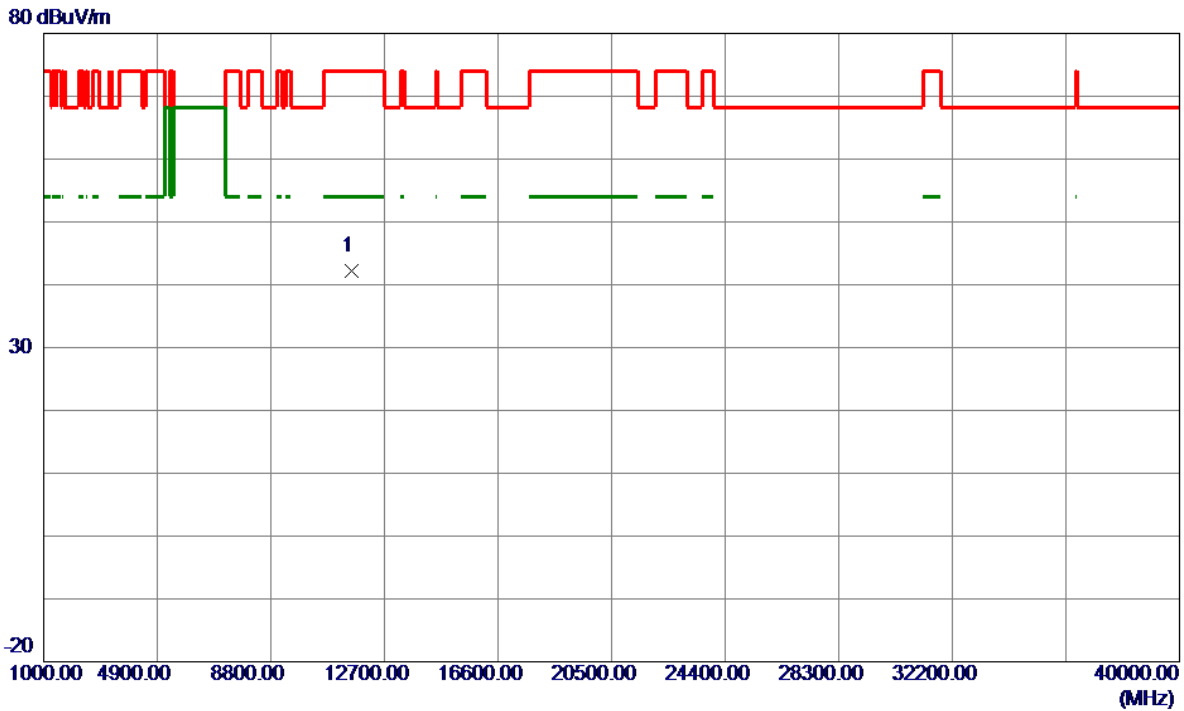


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11570.0000	50.12	-7.98	42.14	74.00	-31.86	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX N(HT20) Mode 5825 MHz	Polarization	Vertical
-----------	---------------------------------	--------------	----------

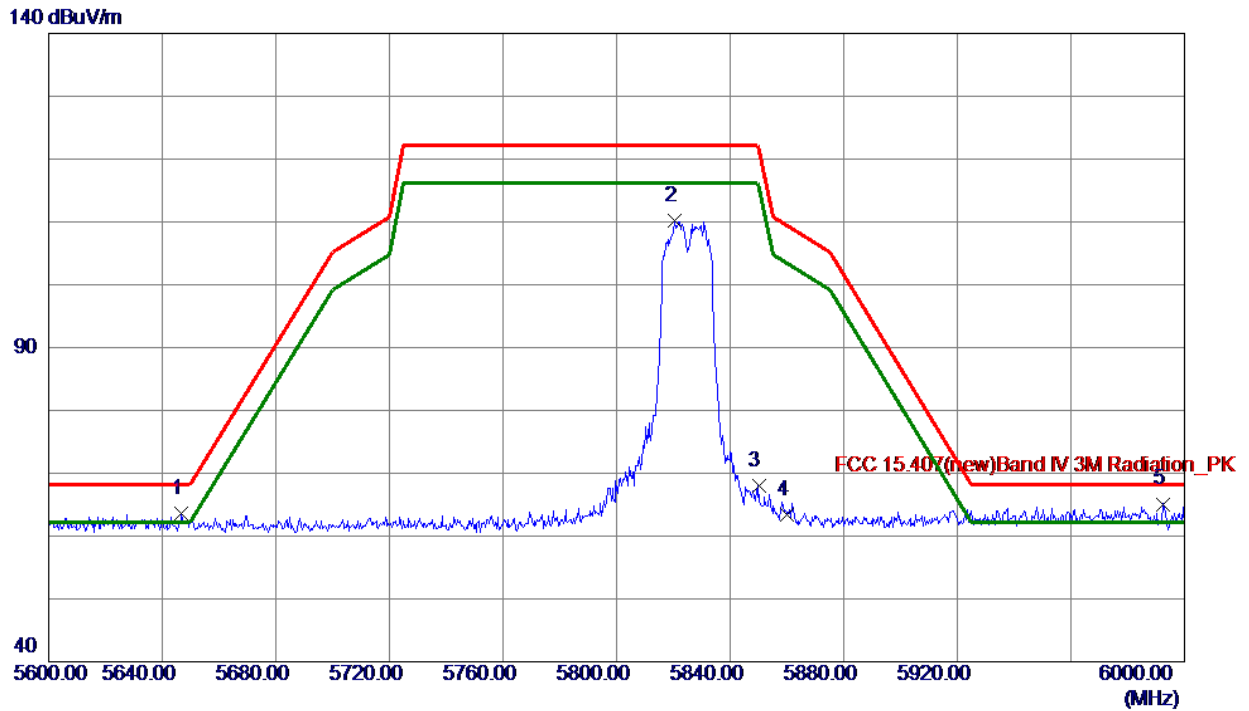


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5646.8000	25.23	38.43	63.66	68.20	-4.54	Peak	
2	5820.4000	71.56	38.73	110.29	122.20	-11.91	Peak	
3	5850.0000	29.19	38.81	68.00	122.20	-54.20	Peak	
4	5860.0000	24.50	38.83	63.33	109.40	-46.07	Peak	
5 *	5992.6000	25.94	39.16	65.10	68.20	-3.10	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX N(HT20) Mode 5825 MHz	Polarization	Vertical
-----------	---------------------------------	--------------	----------

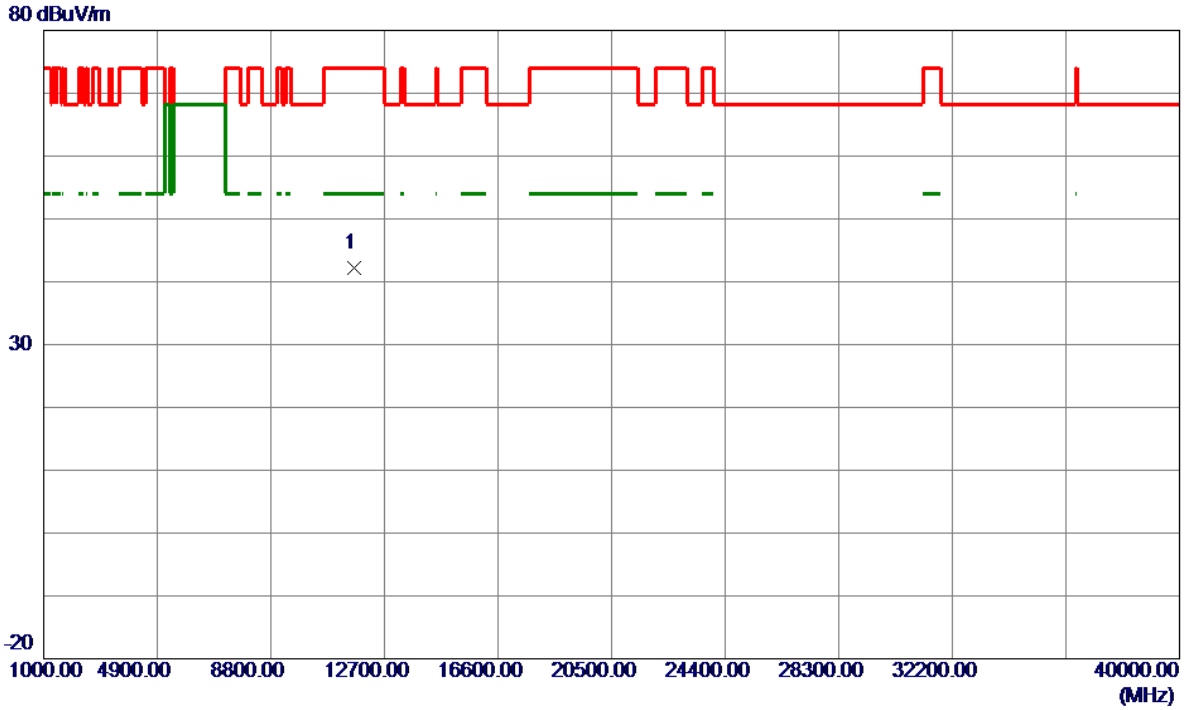


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11650.0000	50.26	-8.06	42.20	74.00	-31.80	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX N(HT20) Mode 5825 MHz	Polarization	Horizontal
-----------	---------------------------------	--------------	------------

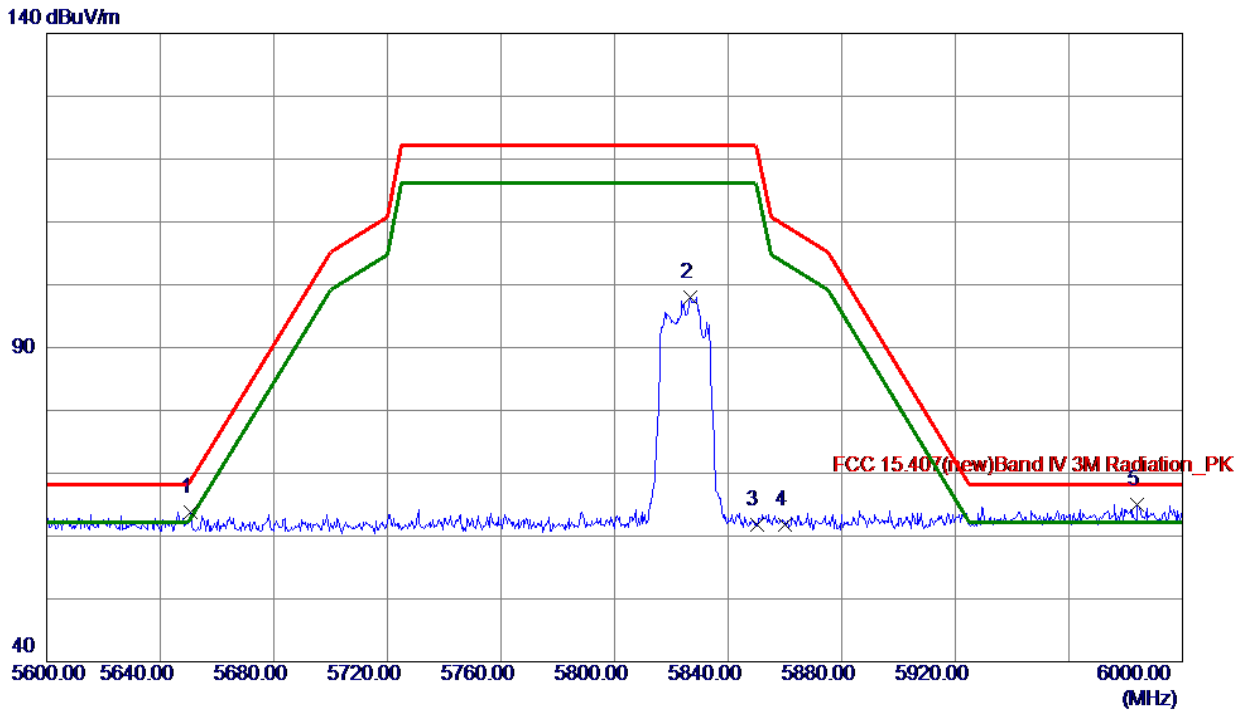


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5650.8000	25.41	38.44	63.85	68.79	-4.94	Peak	
2	5826.8000	59.25	38.75	98.00	122.20	-24.20	Peak	
3	5850.0000	23.03	38.81	61.84	122.20	-60.36	Peak	
4	5860.0000	22.93	38.83	61.76	109.40	-47.64	Peak	
5 *	5984.2000	25.95	39.14	65.09	68.20	-3.11	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX N(HT20) Mode 5825 MHz	Polarization	Horizontal
-----------	---------------------------------	--------------	------------

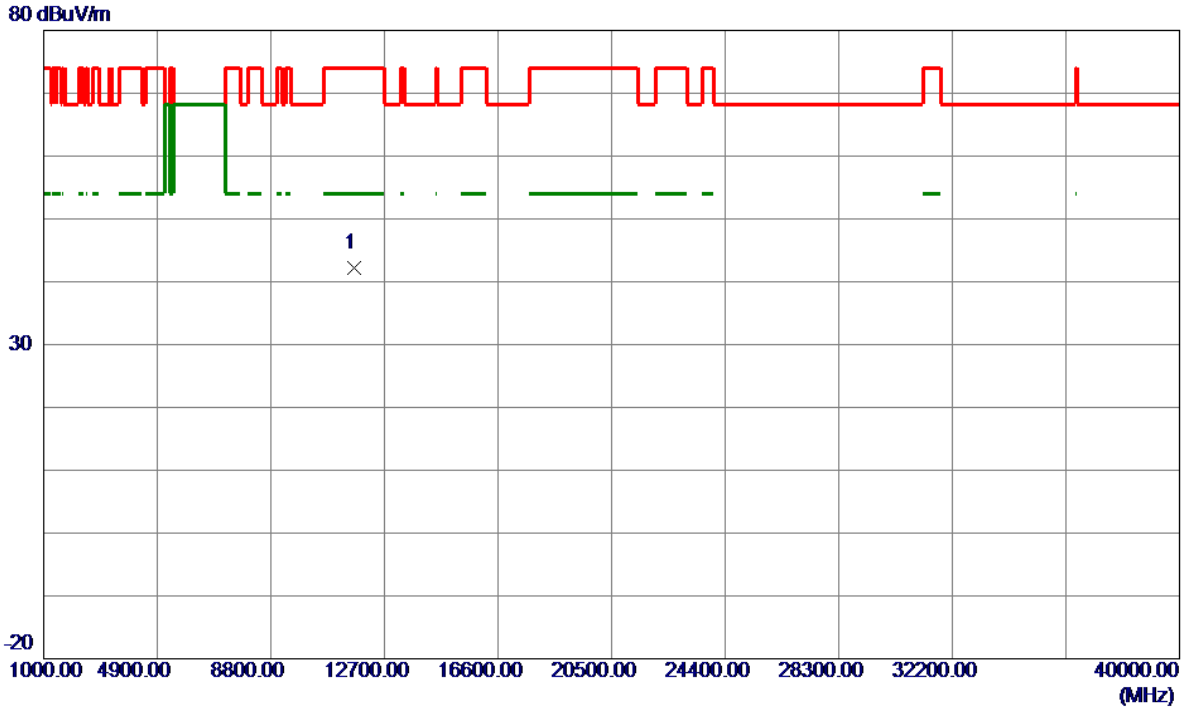


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11650.0000	50.32	-8.06	42.26	74.00	-31.74	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX N(HT40) Mode 5755 MHz	Polarization	Vertical
-----------	---------------------------------	--------------	----------

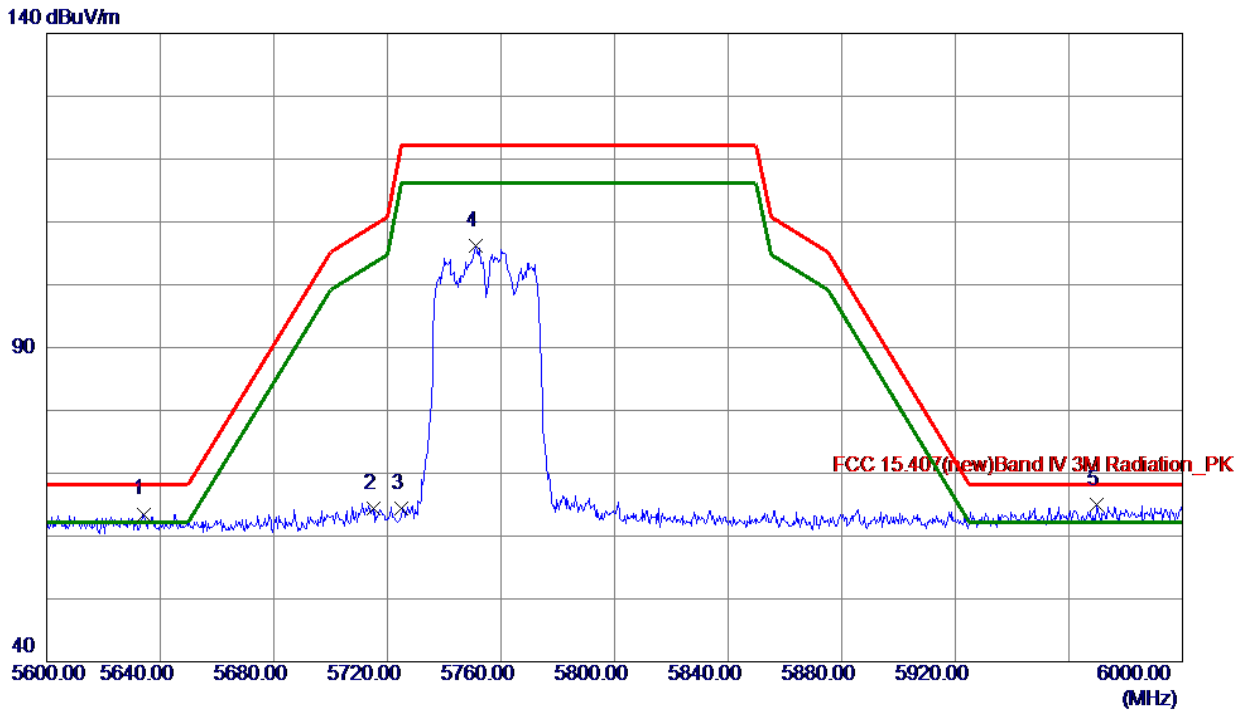


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5634.0000	25.09	38.41	63.50	68.20	-4.70	Peak	
2	5715.0000	25.82	38.55	64.37	109.40	-45.03	Peak	
3	5725.0000	25.85	38.56	64.41	122.20	-57.79	Peak	
4	5751.2000	67.60	38.60	106.20	122.20	-16.00	Peak	
5 *	5969.8000	25.81	39.10	64.91	68.20	-3.29	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX N(HT40) Mode 5755 MHz	Polarization	Vertical
-----------	---------------------------------	--------------	----------

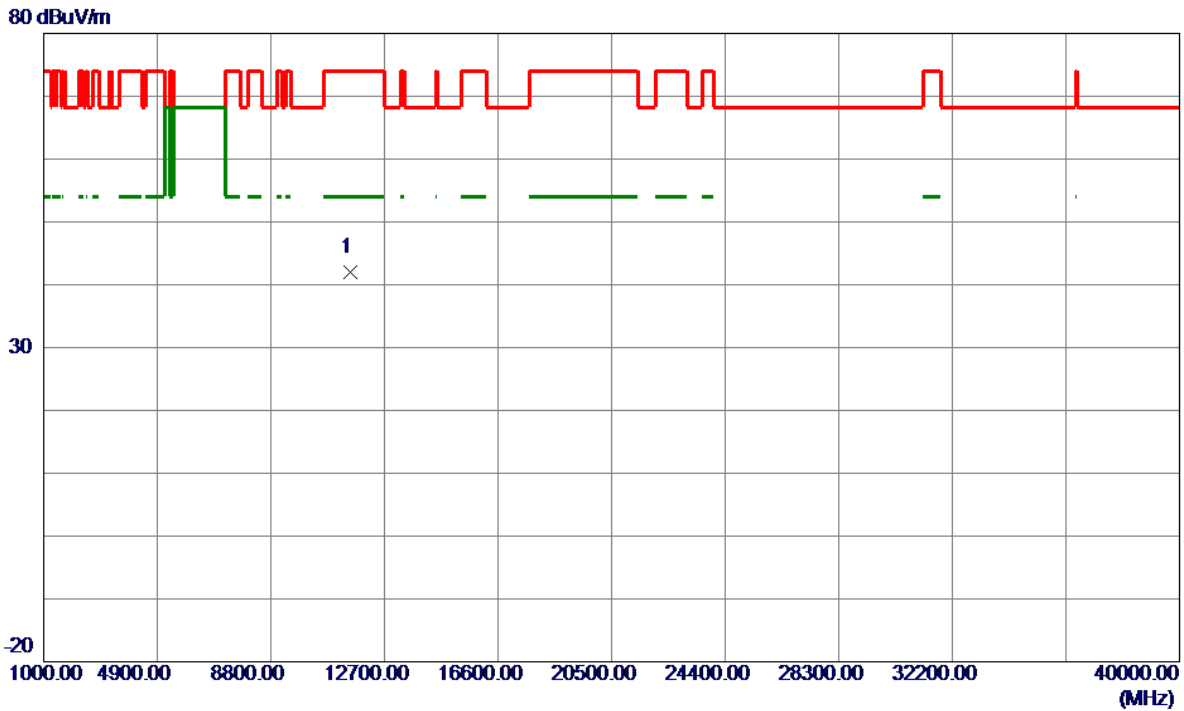


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11510.0000	50.07	-8.00	42.07	74.00	-31.93	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX N(HT40) Mode 5755 MHz	Polarization	Horizontal
-----------	---------------------------------	--------------	------------

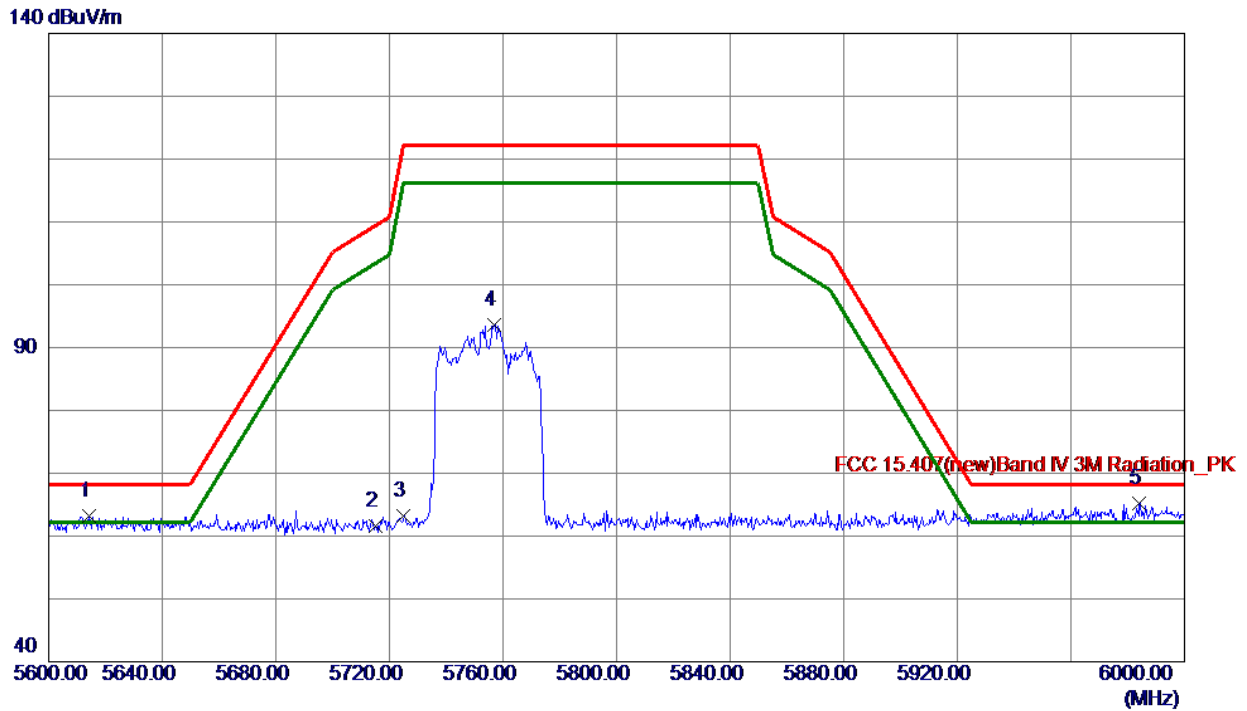


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5614.4000	24.84	38.38	63.22	68.20	-4.98	Peak	
2	5715.0000	23.12	38.55	61.67	109.40	-47.73	Peak	
3	5725.0000	24.57	38.56	63.13	122.20	-59.07	Peak	
4	5757.0000	54.98	38.61	93.59	122.20	-28.61	Peak	
5 *	5984.2000	26.00	39.14	65.14	68.20	-3.06	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX N(HT40) Mode 5755 MHz	Polarization	Horizontal
-----------	---------------------------------	--------------	------------

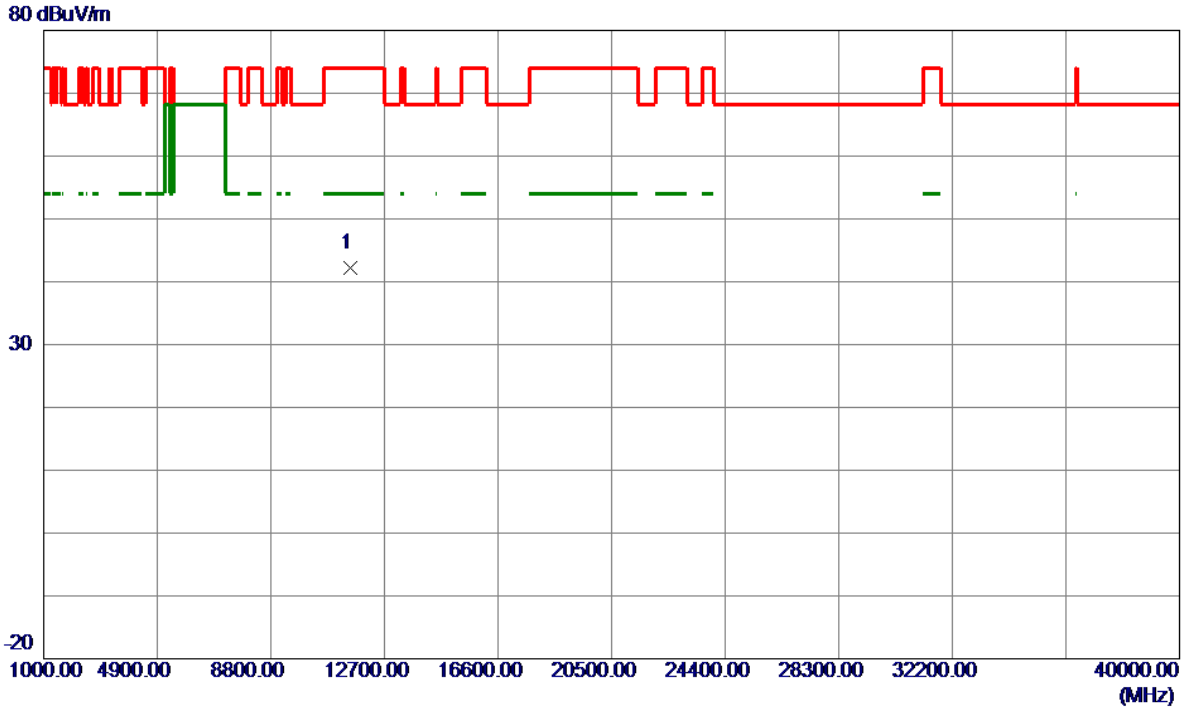


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11510.0000	50.24	-8.00	42.24	74.00	-31.76	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX N(HT40) Mode 5795 MHz	Polarization	Vertical
-----------	---------------------------------	--------------	----------

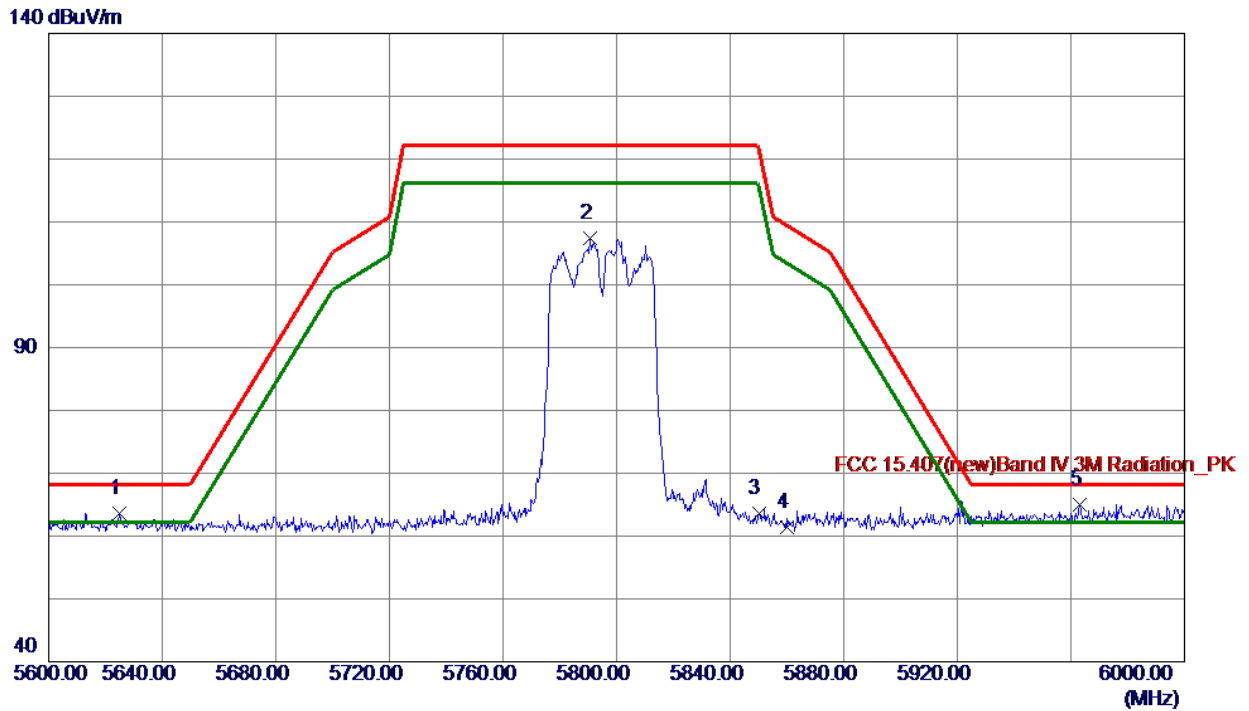


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5625.0000	25.19	38.40	63.59	68.20	-4.61	Peak	
2	5790.6000	68.69	38.67	107.36	122.20	-14.84	Peak	
3	5850.0000	24.86	38.81	63.67	122.20	-58.53	Peak	
4	5860.0000	22.58	38.83	61.41	109.40	-47.99	Peak	
5 *	5963.0000	25.97	39.09	65.06	68.20	-3.14	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX N(HT40) Mode 5795 MHz	Polarization	Vertical
-----------	---------------------------------	--------------	----------

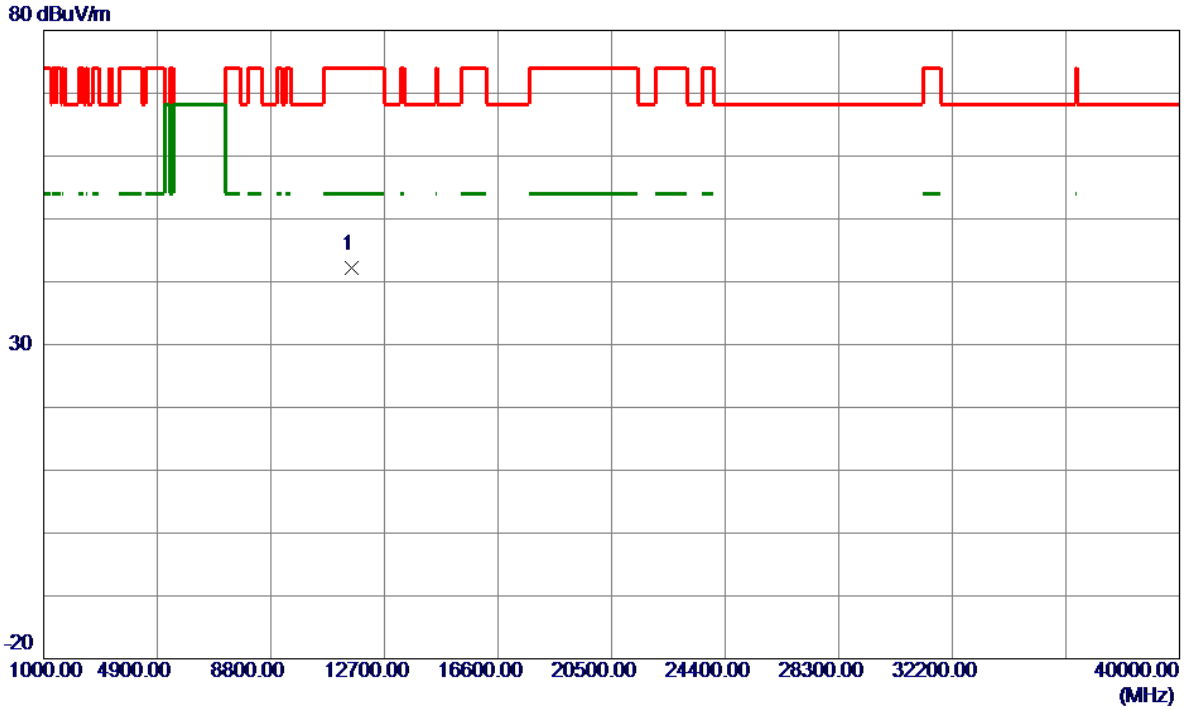


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11590.0000	50.08	-7.98	42.10	74.00	-31.90	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX N(HT40) Mode 5795 MHz	Polarization	Horizontal
-----------	---------------------------------	--------------	------------

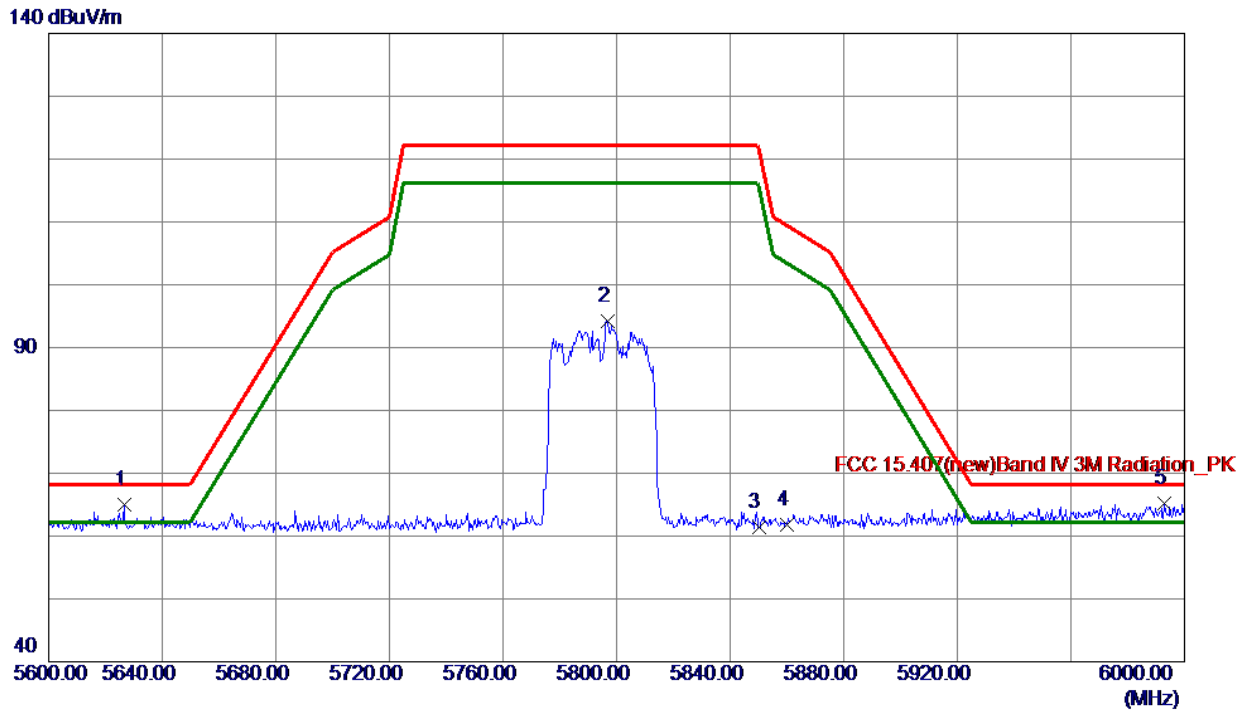


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5626.6000	26.57	38.40	64.97	68.20	-3.23	Peak	
2	5796.8000	55.48	38.68	94.16	122.20	-28.04	Peak	
3	5850.0000	22.57	38.81	61.38	122.20	-60.82	Peak	
4	5860.0000	22.96	38.83	61.79	109.40	-47.61	Peak	
5 *	5993.0000	25.98	39.16	65.14	68.20	-3.06	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX N(HT40) Mode 5795 MHz	Polarization	Horizontal
-----------	---------------------------------	--------------	------------

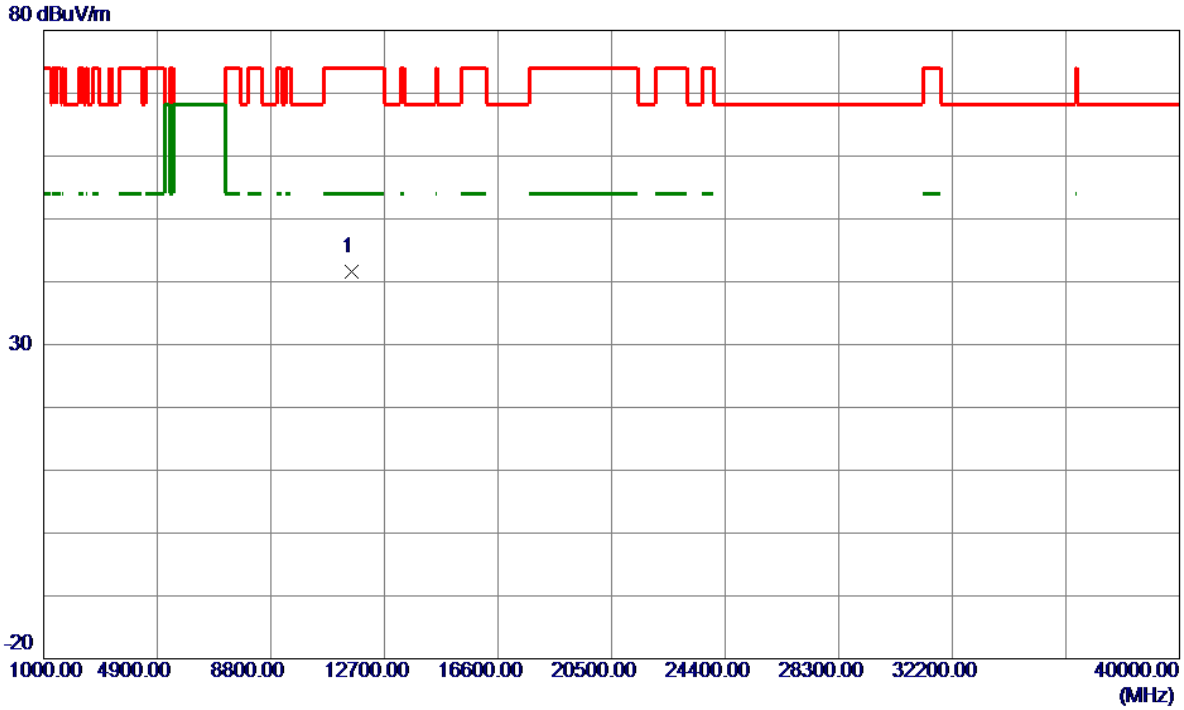


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11590.0000	49.63	-7.98	41.65	74.00	-32.35	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT80) Mode 5775 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

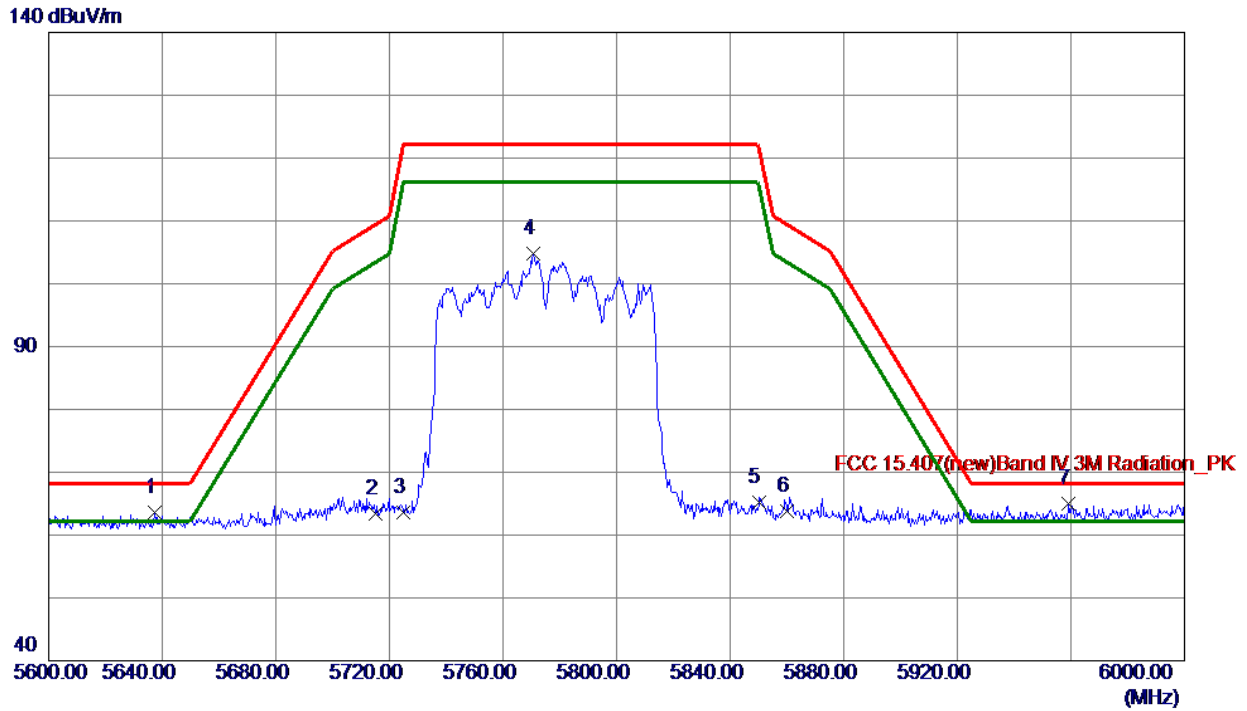


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5637.4000	25.12	38.42	63.54	68.20	-4.66	Peak	
2	5715.0000	24.84	38.55	63.39	109.40	-46.01	Peak	
3	5725.0000	25.00	38.56	63.56	122.20	-58.64	Peak	
4	5770.8000	66.20	38.64	104.84	122.20	-17.36	Peak	
5	5850.0000	26.32	38.81	65.13	122.20	-57.07	Peak	
6	5860.0000	24.94	38.83	63.77	109.40	-45.63	Peak	
7 *	5959.2000	25.83	39.08	64.91	68.20	-3.29	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT80) Mode 5775 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

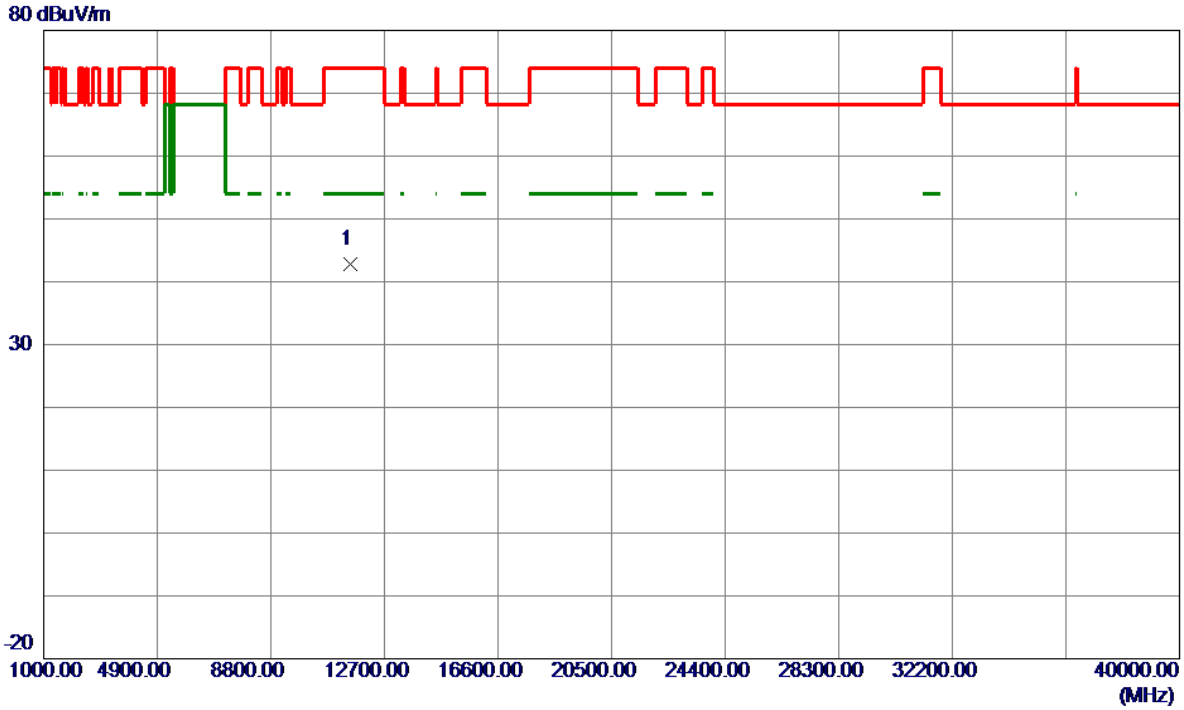


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11550.0000	50.77	-7.99	42.78	74.00	-31.22	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT80) Mode 5775 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

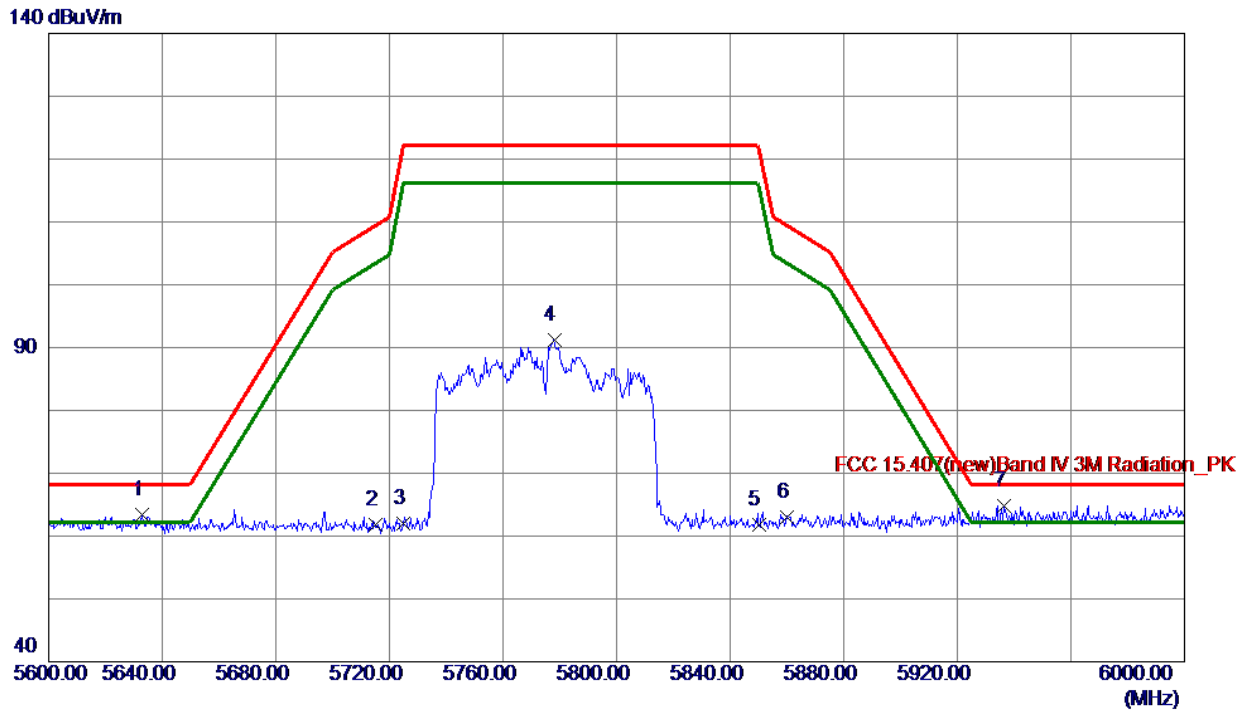


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5633.0000	24.97	38.41	63.38	68.20	-4.82	Peak	
2	5715.0000	23.28	38.55	61.83	109.40	-47.57	Peak	
3	5725.0000	23.53	38.56	62.09	122.20	-60.11	Peak	
4	5778.0000	52.46	38.65	91.11	122.20	-31.09	Peak	
5	5850.0000	22.94	38.81	61.75	122.20	-60.45	Peak	
6	5860.0000	24.26	38.83	63.09	109.40	-46.31	Peak	
7 *	5936.4000	25.83	39.02	64.85	68.20	-3.35	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT80) Mode 5775 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

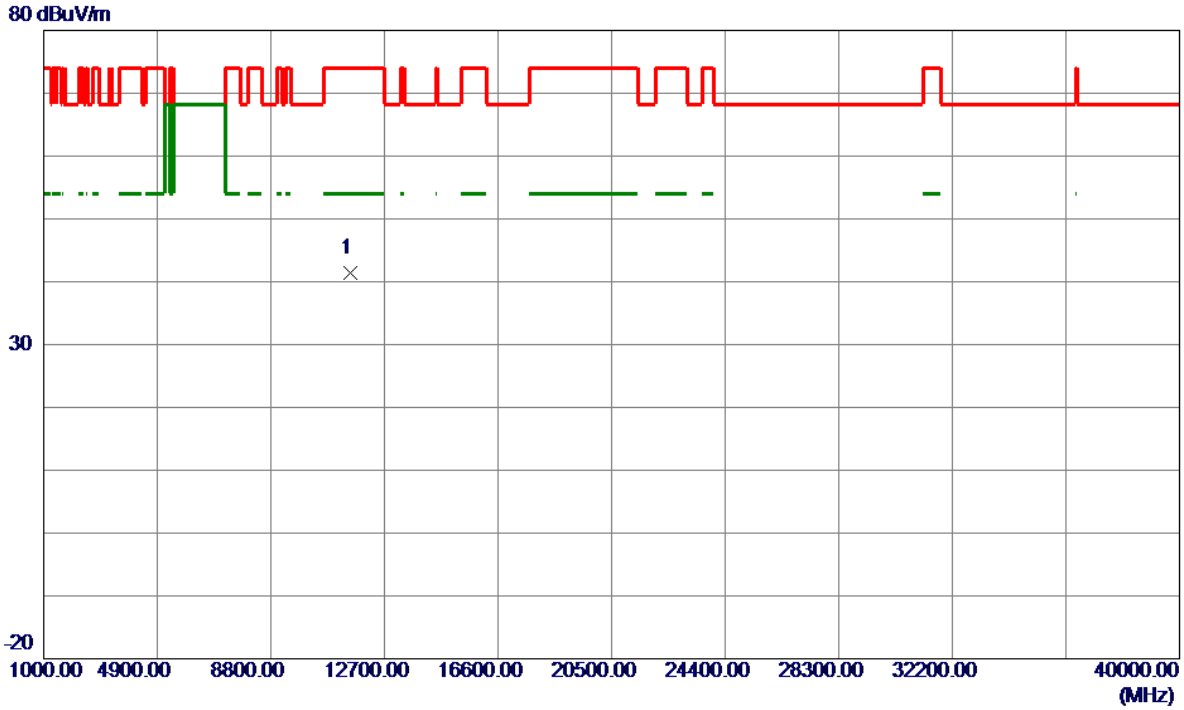


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11550.0000	49.47	-7.99	41.48	74.00	-32.52	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5745 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

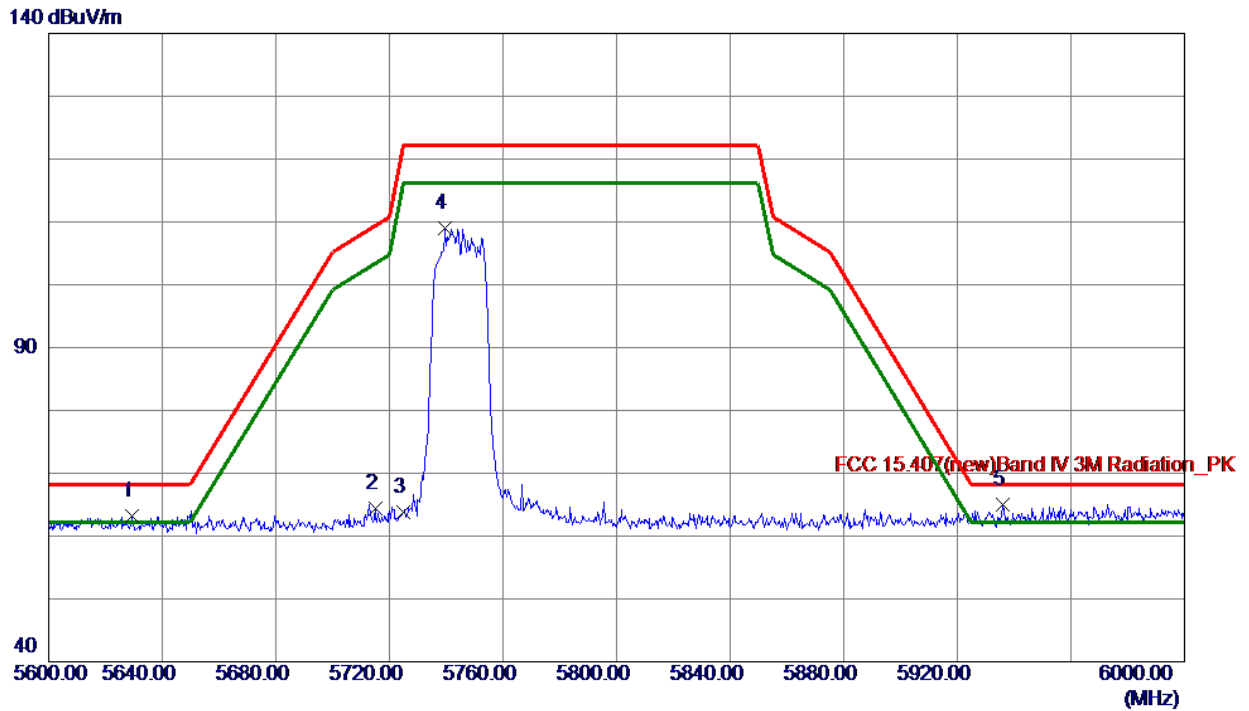


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5629.4000	24.82	38.41	63.23	68.20	-4.97	Peak	
2	5715.0000	25.94	38.55	64.49	109.40	-44.91	Peak	
3	5725.0000	25.32	38.56	63.88	122.20	-58.32	Peak	
4	5739.6000	70.47	38.59	109.06	122.20	-13.14	Peak	
5 *	5936.2000	26.04	39.02	65.06	68.20	-3.14	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5745 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

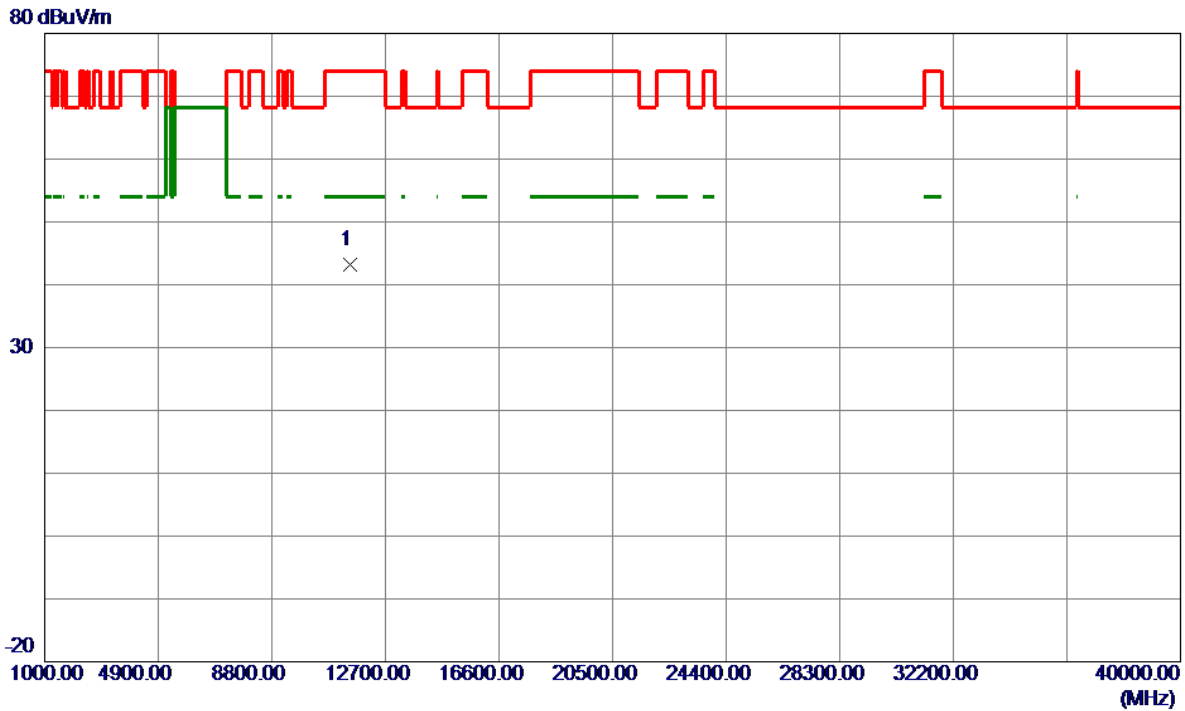


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11490.0000	51.19	-8.02	43.17	74.00	-30.83	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5745 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

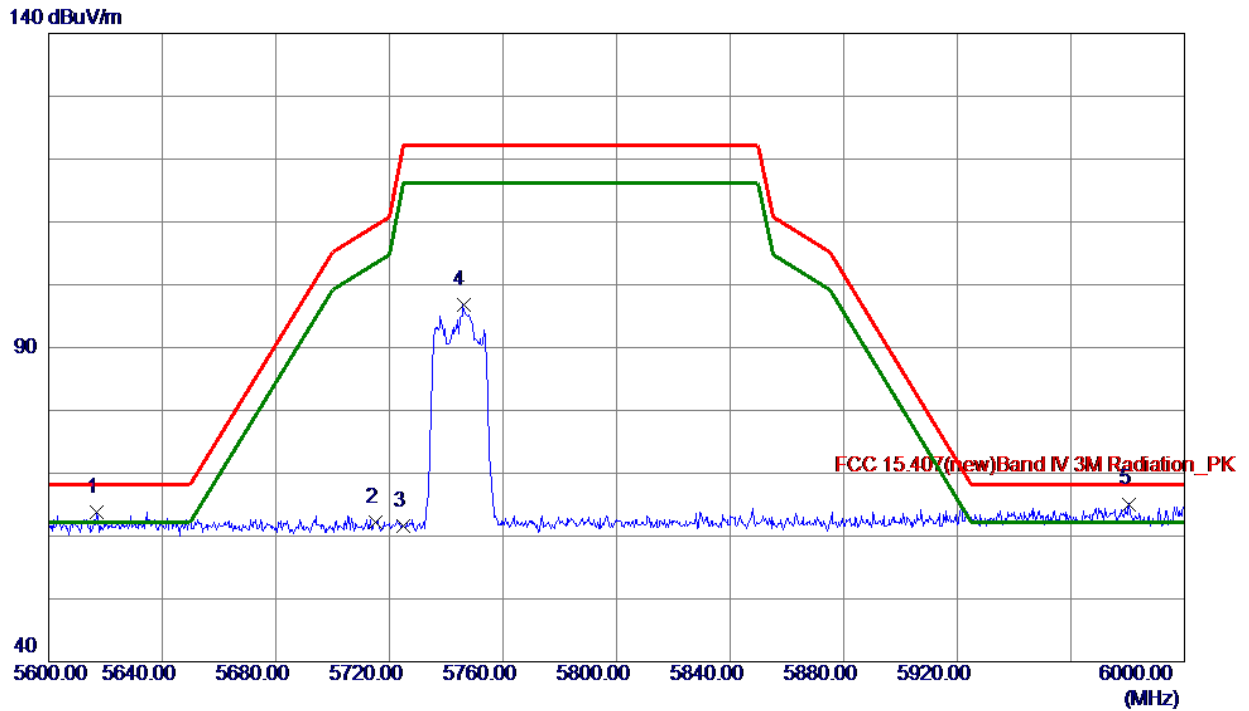


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5617.0000	25.37	38.39	63.76	68.20	-4.44	Peak	
2	5715.0000	23.68	38.55	62.23	109.40	-47.17	Peak	
3	5725.0000	23.04	38.56	61.60	122.20	-60.60	Peak	
4	5746.0000	58.18	38.60	96.78	122.20	-25.42	Peak	
5 *	5980.4000	25.97	39.13	65.10	68.20	-3.10	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5745 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

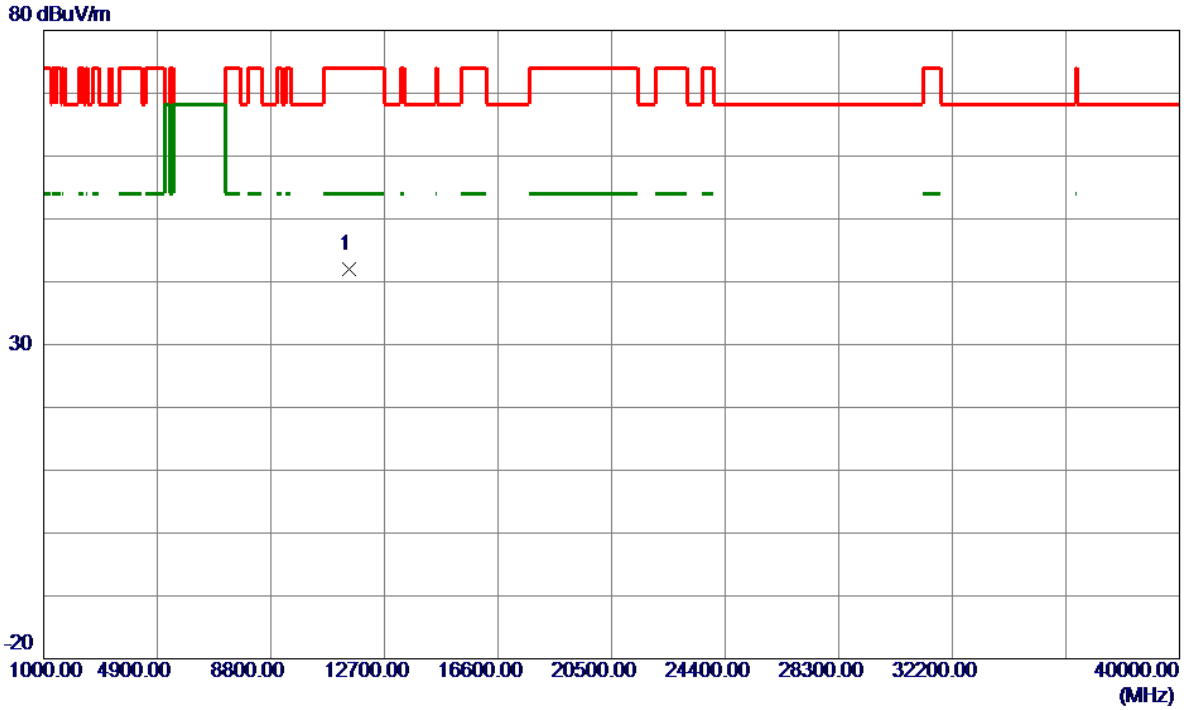


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11490.0000	50.09	-8.02	42.07	74.00	-31.93	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5785 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

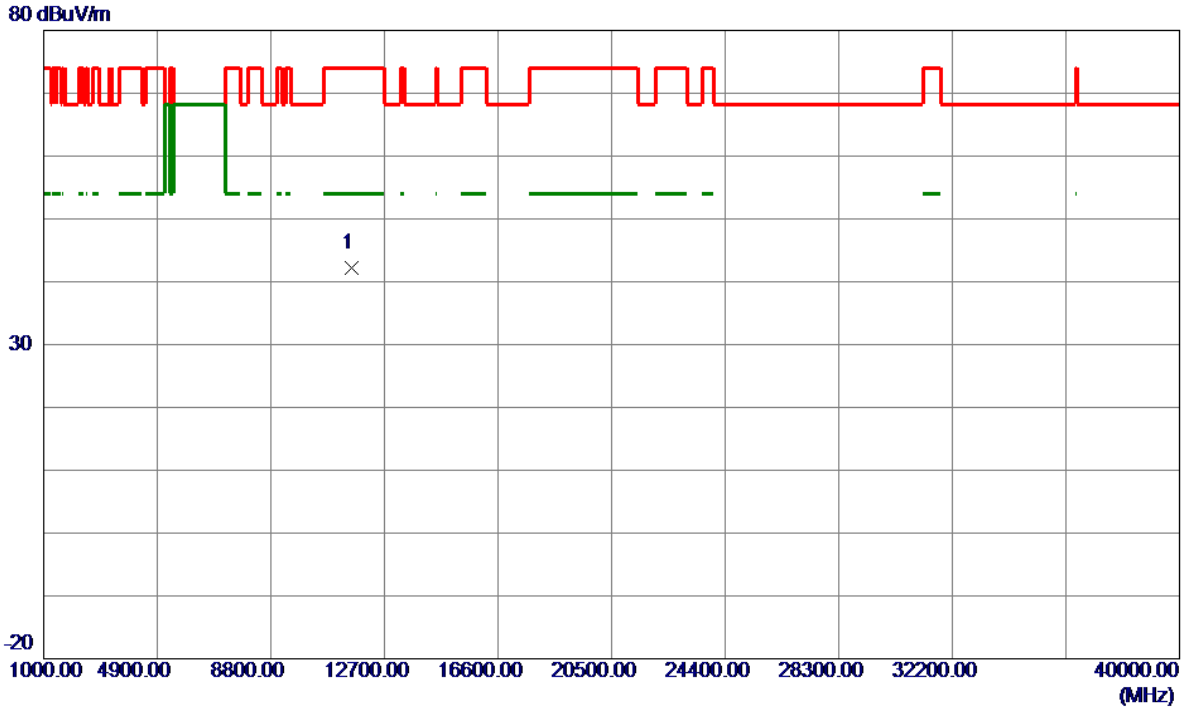


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11570.0000	50.17	-7.98	42.19	74.00	-31.81	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5785 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

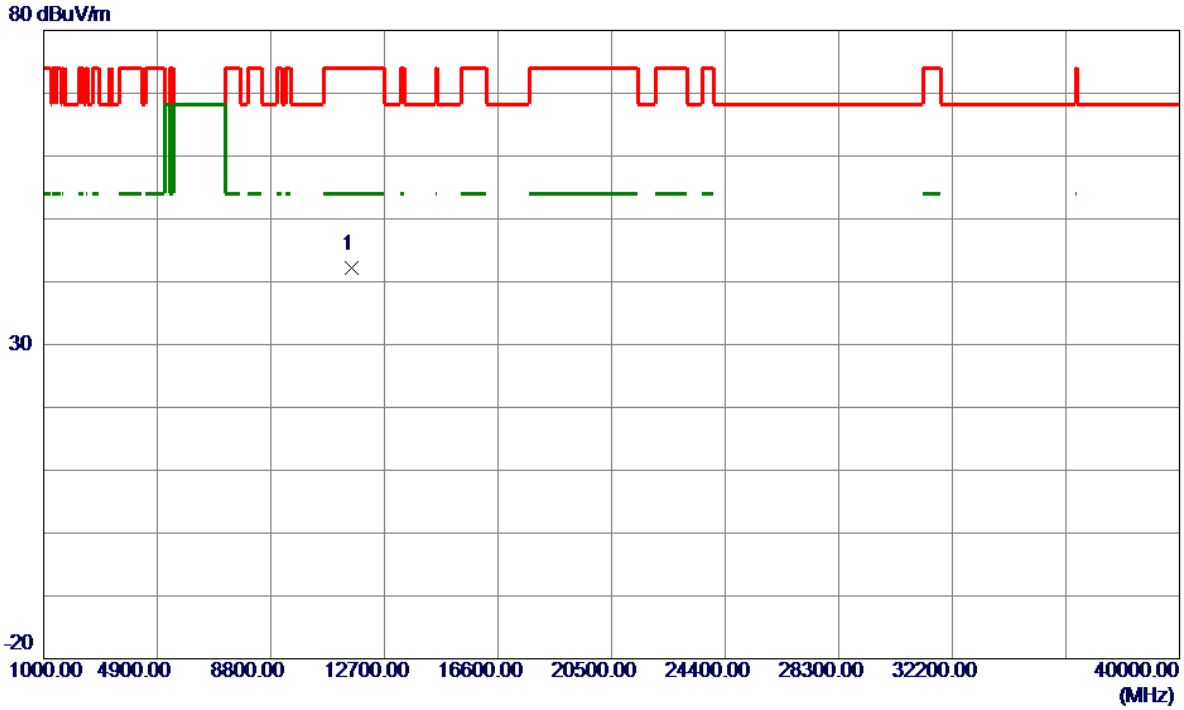


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11570.0000	50.08	-7.98	42.10	74.00	-31.90	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5825 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

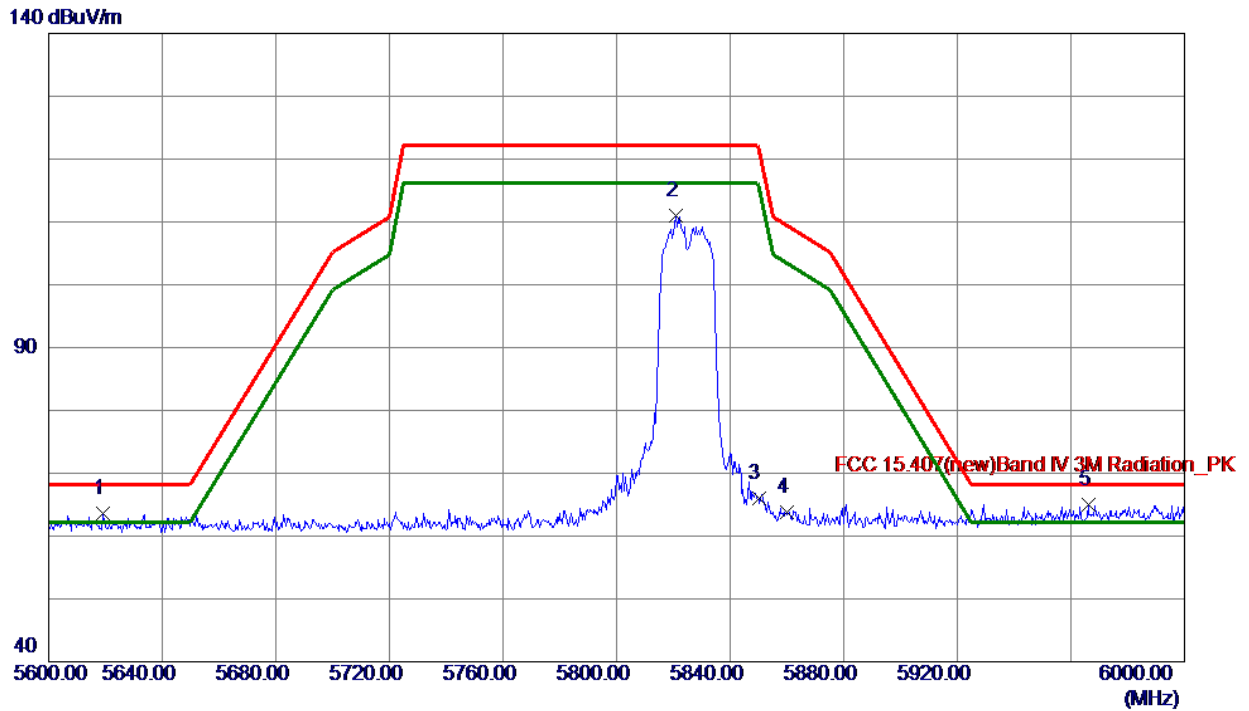


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5619.2000	25.15	38.39	63.54	68.20	-4.66	Peak	
2	5820.8000	72.22	38.74	110.96	122.20	-11.24	Peak	
3	5850.0000	27.19	38.81	66.00	122.20	-56.20	Peak	
4	5860.0000	24.97	38.83	63.80	109.40	-45.60	Peak	
5 *	5966.2000	25.86	39.10	64.96	68.20	-3.24	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5825 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

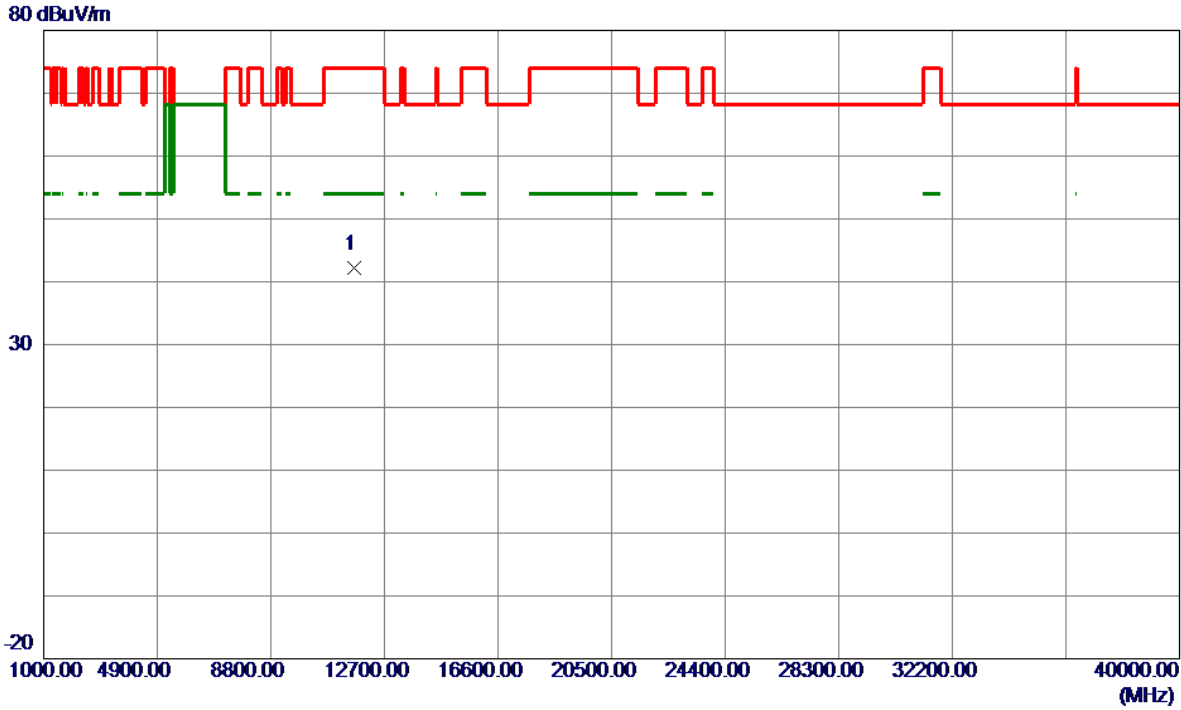


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11650.0000	50.16	-8.06	42.10	74.00	-31.90	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5825 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

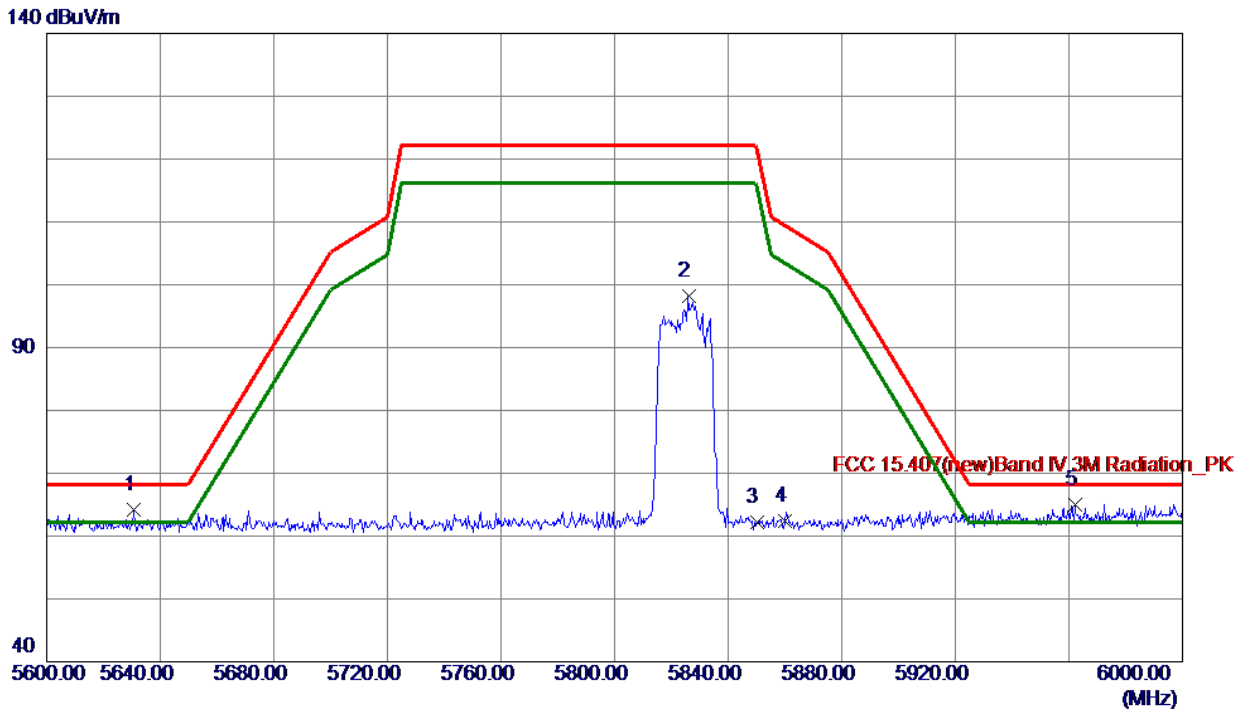


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5630.6000	25.72	38.41	64.13	68.20	-4.07	Peak	
2	5826.0000	59.38	38.75	98.13	122.20	-24.07	Peak	
3	5850.0000	23.47	38.81	62.28	122.20	-59.92	Peak	
4	5860.0000	23.58	38.83	62.41	109.40	-46.99	Peak	
5 *	5962.2000	26.00	39.09	65.09	68.20	-3.11	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5825 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

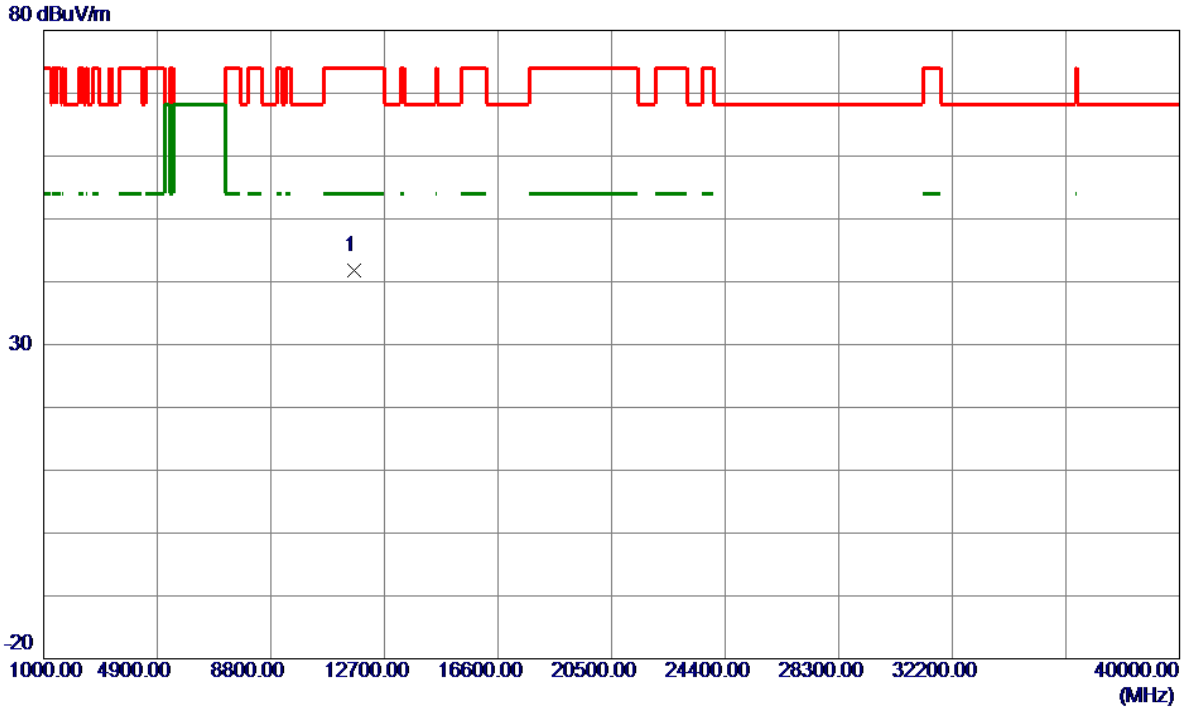


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11650.0000	49.88	-8.06	41.82	74.00	-32.18	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE40) Mode 5755 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

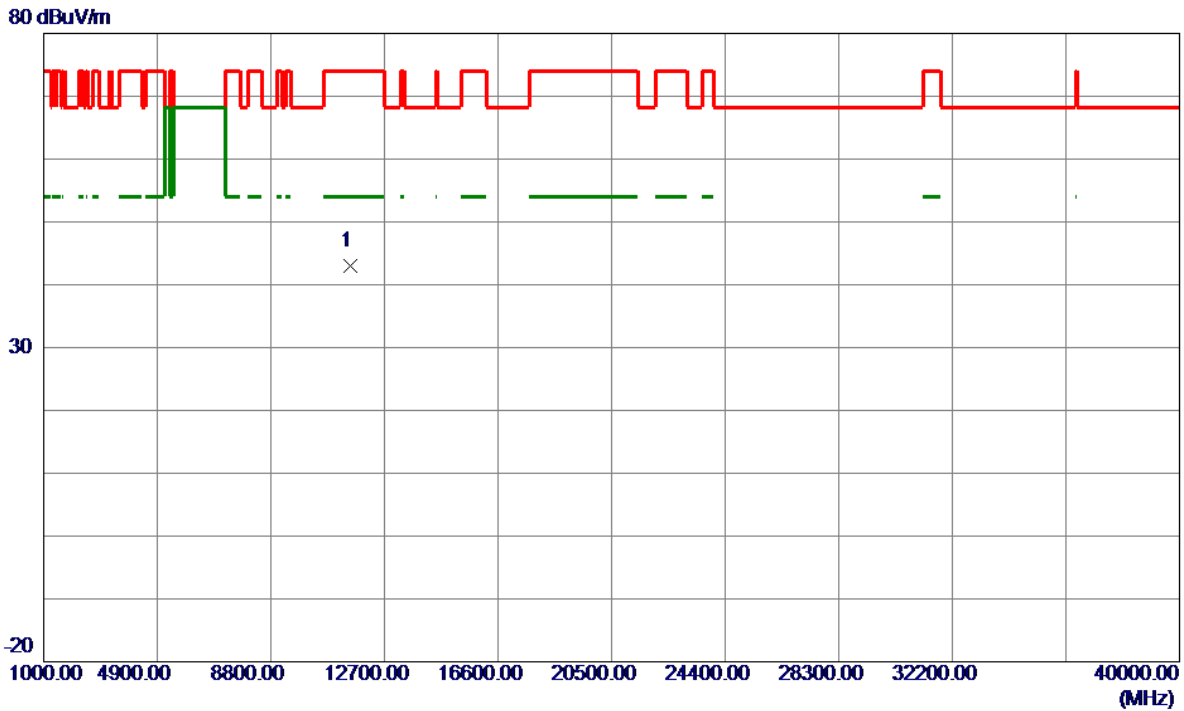


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11510.0000	51.05	-8.00	43.05	74.00	-30.95	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE40) Mode 5755 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

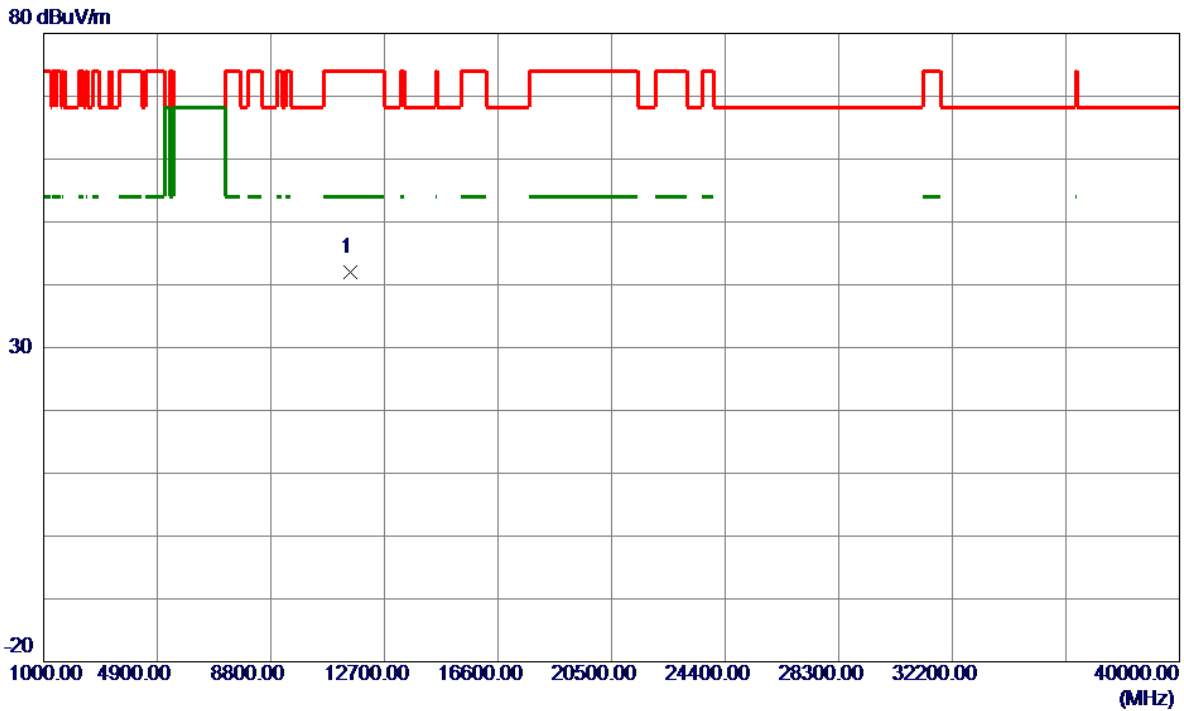


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11510.0000	50.08	-8.00	42.08	74.00	-31.92	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE40) Mode 5795 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

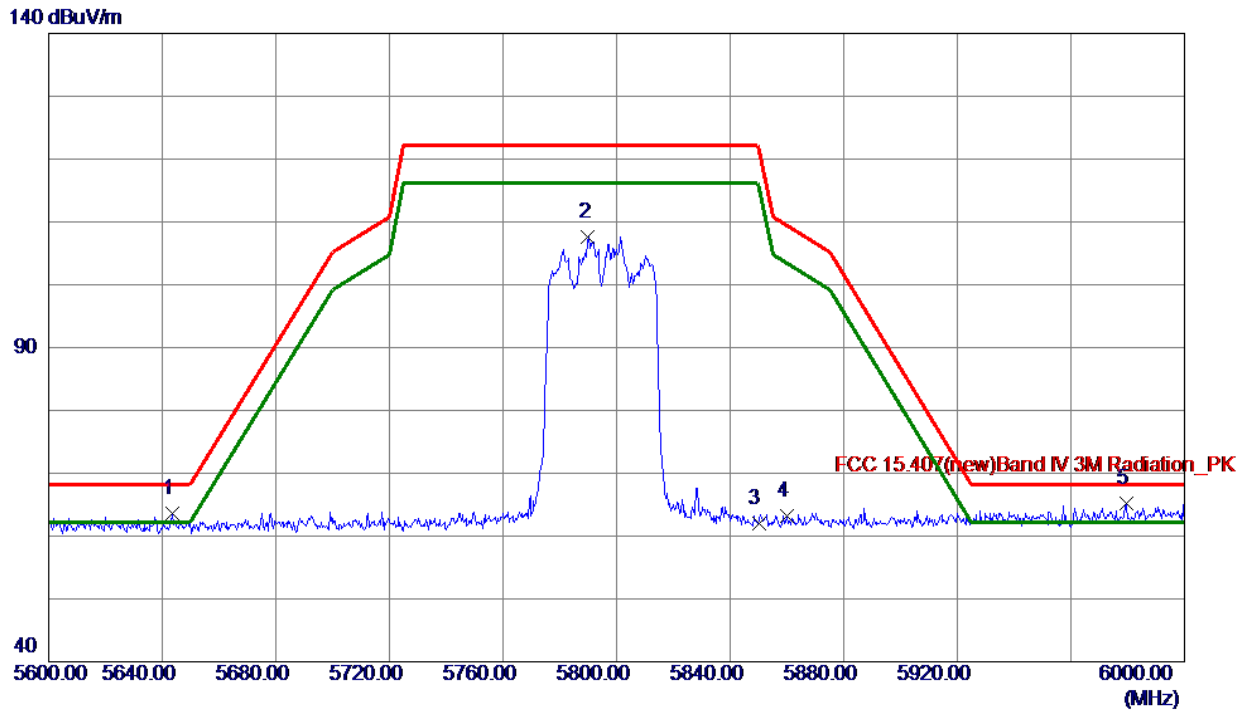


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5643.6000	25.10	38.43	63.53	68.20	-4.67	Peak	
2	5790.0000	68.95	38.67	107.62	122.20	-14.58	Peak	
3	5850.0000	23.14	38.81	61.95	122.20	-60.25	Peak	
4	5860.0000	24.36	38.83	63.19	109.40	-46.21	Peak	
5 *	5979.4000	25.99	39.13	65.12	68.20	-3.08	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE40) Mode 5795 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

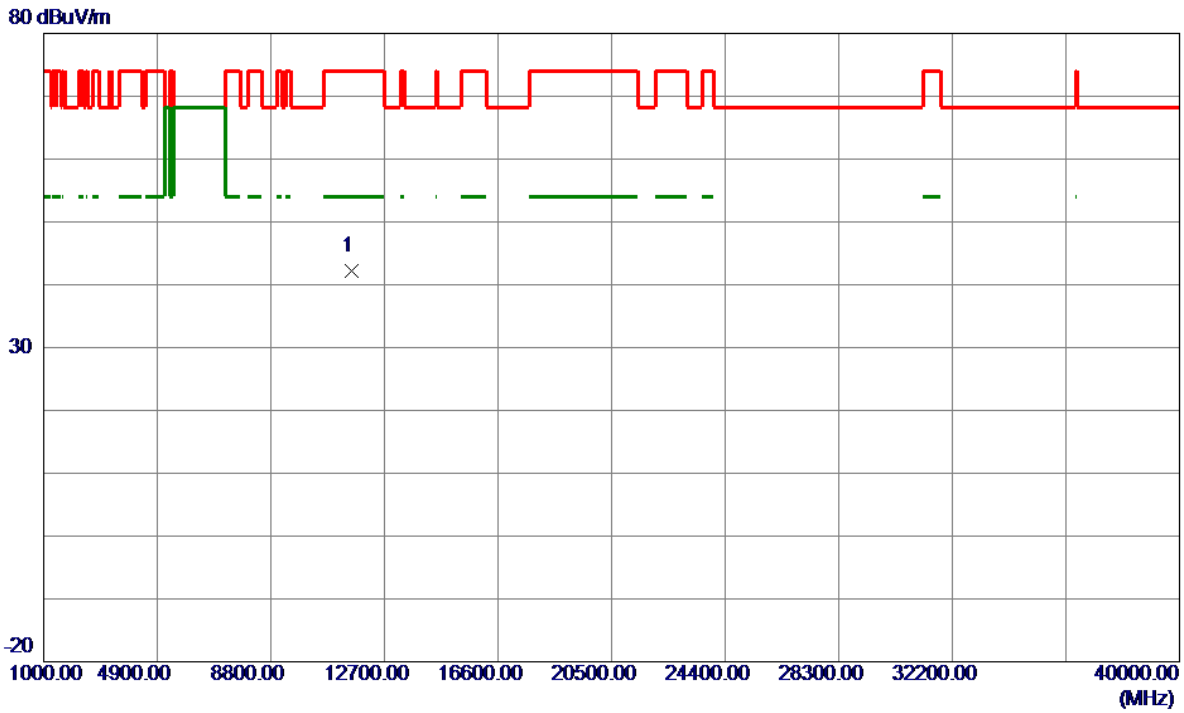


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11590.0000	50.12	-7.98	42.14	74.00	-31.86	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE40) Mode 5795 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

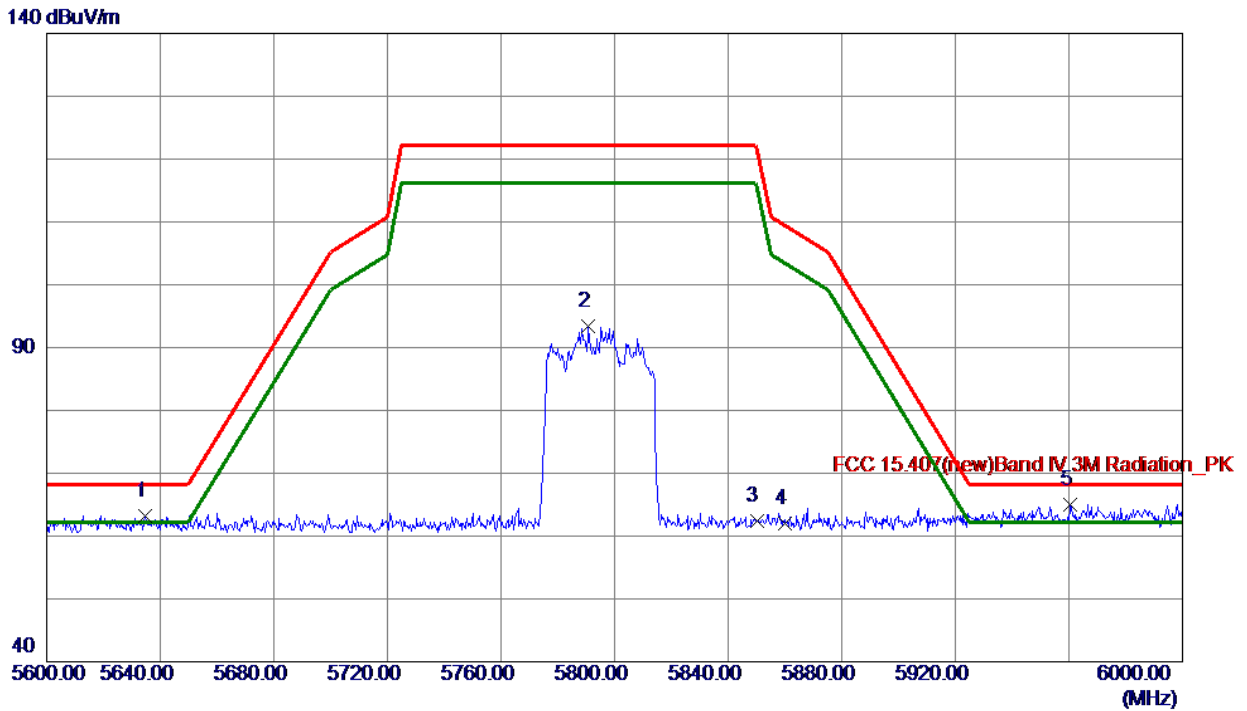


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5634.6000	24.72	38.41	63.13	68.20	-5.07	Peak	
2	5790.8000	54.82	38.67	93.49	122.20	-28.71	Peak	
3	5850.0000	23.52	38.81	62.33	122.20	-59.87	Peak	
4	5860.0000	23.13	38.83	61.96	109.40	-47.44	Peak	
5 *	5960.6000	25.97	39.08	65.05	68.20	-3.15	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE40) Mode 5795 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

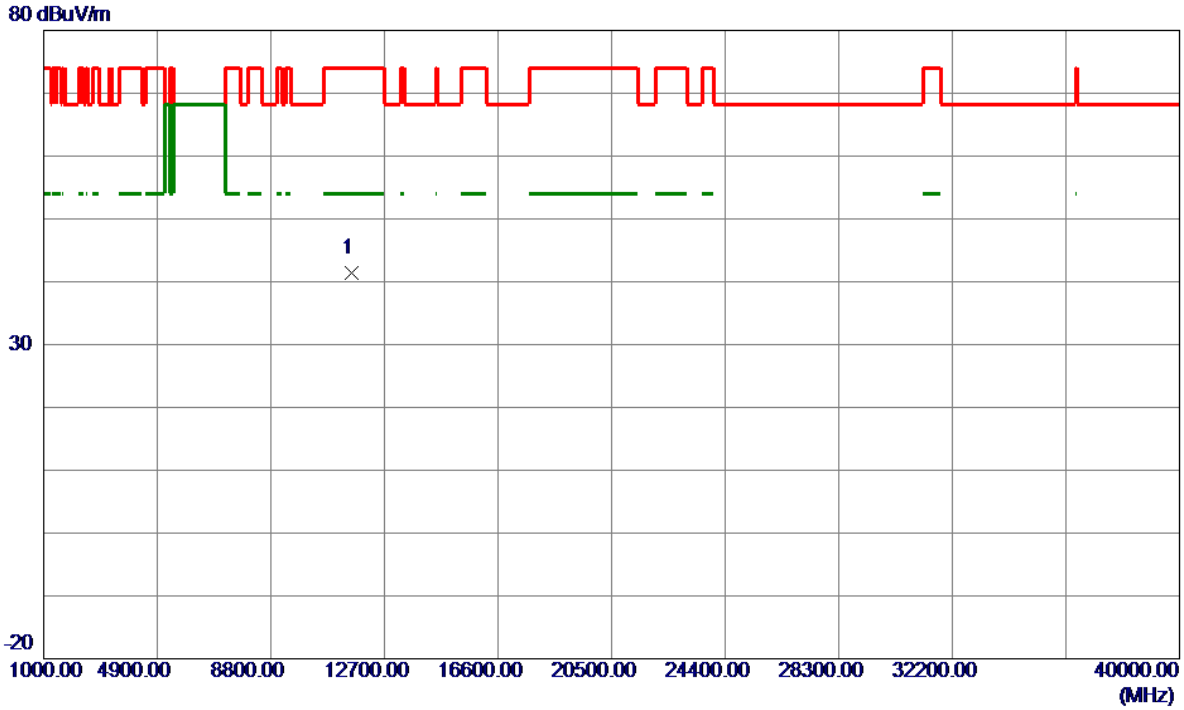


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11590.0000	49.35	-7.98	41.37	74.00	-32.63	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE80) Mode 5775 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

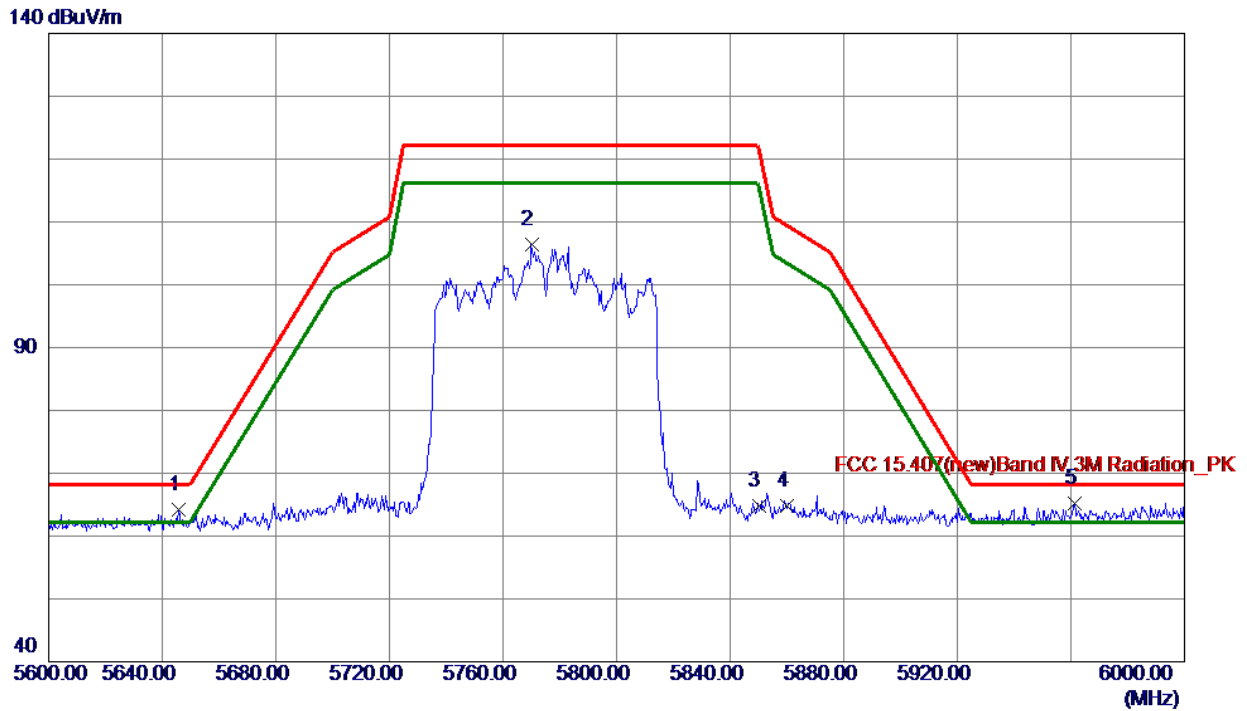


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5645.8000	25.71	38.43	64.14	68.20	-4.06	Peak	
2	5770.0000	67.77	38.63	106.40	122.20	-15.80	Peak	
3	5850.0000	26.06	38.81	64.87	122.20	-57.33	Peak	
4	5860.0000	25.95	38.83	64.78	109.40	-44.62	Peak	
5 *	5961.2000	26.08	39.08	65.16	68.20	-3.04	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE80) Mode 5775 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

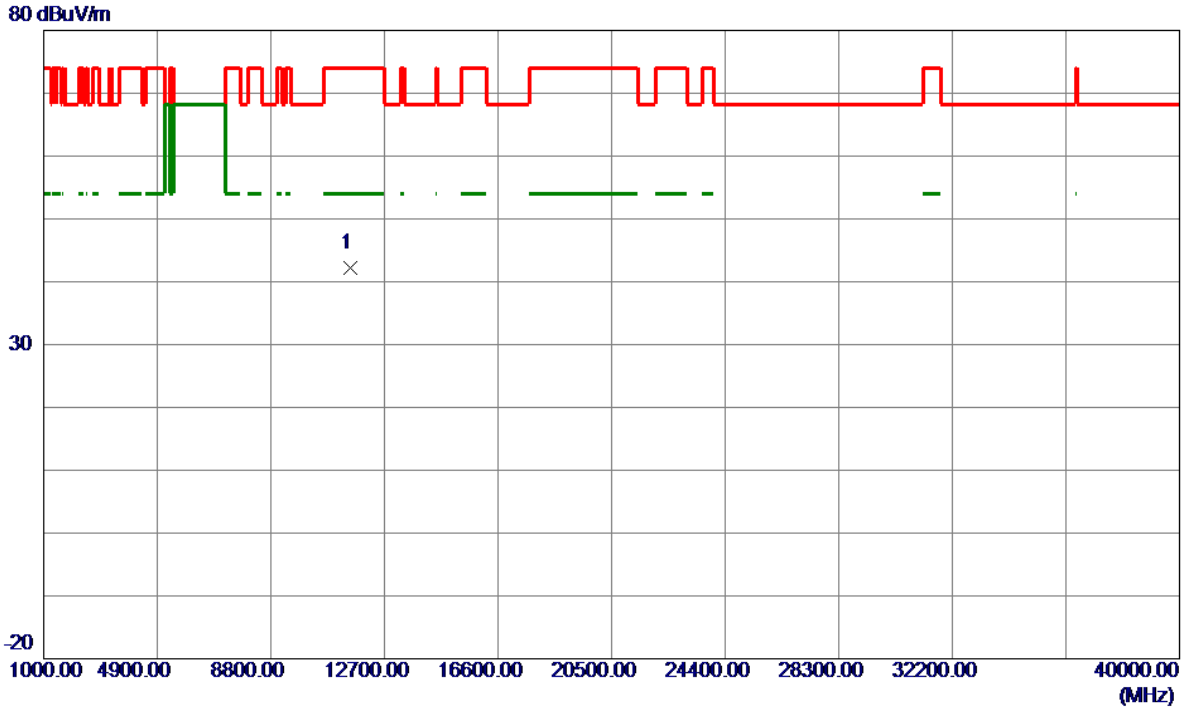


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11550.0000	50.17	-7.99	42.18	74.00	-31.82	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE80) Mode 5775 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

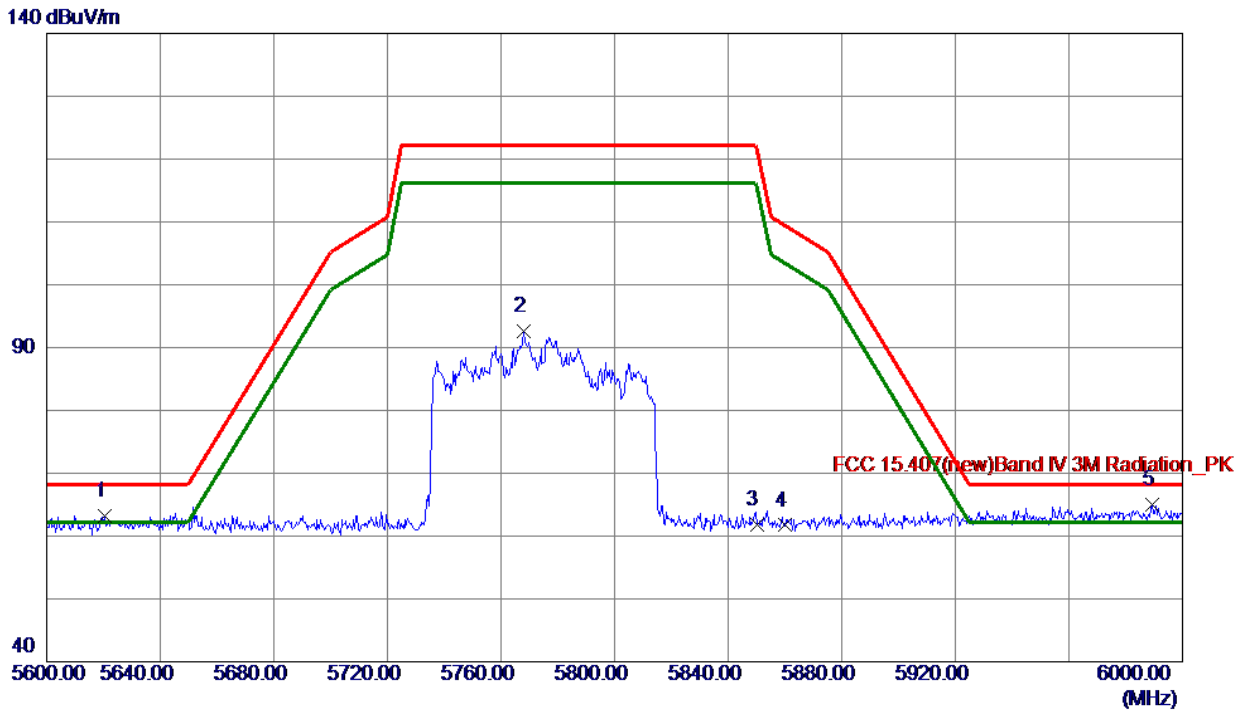


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5620.6000	24.80	38.39	63.19	68.20	-5.01	Peak	
2	5768.2000	53.89	38.63	92.52	122.20	-29.68	Peak	
3	5850.0000	22.96	38.81	61.77	122.20	-60.43	Peak	
4	5860.0000	22.87	38.83	61.70	109.40	-47.70	Peak	
5 *	5989.2000	25.87	39.15	65.02	68.20	-3.18	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE80) Mode 5775 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

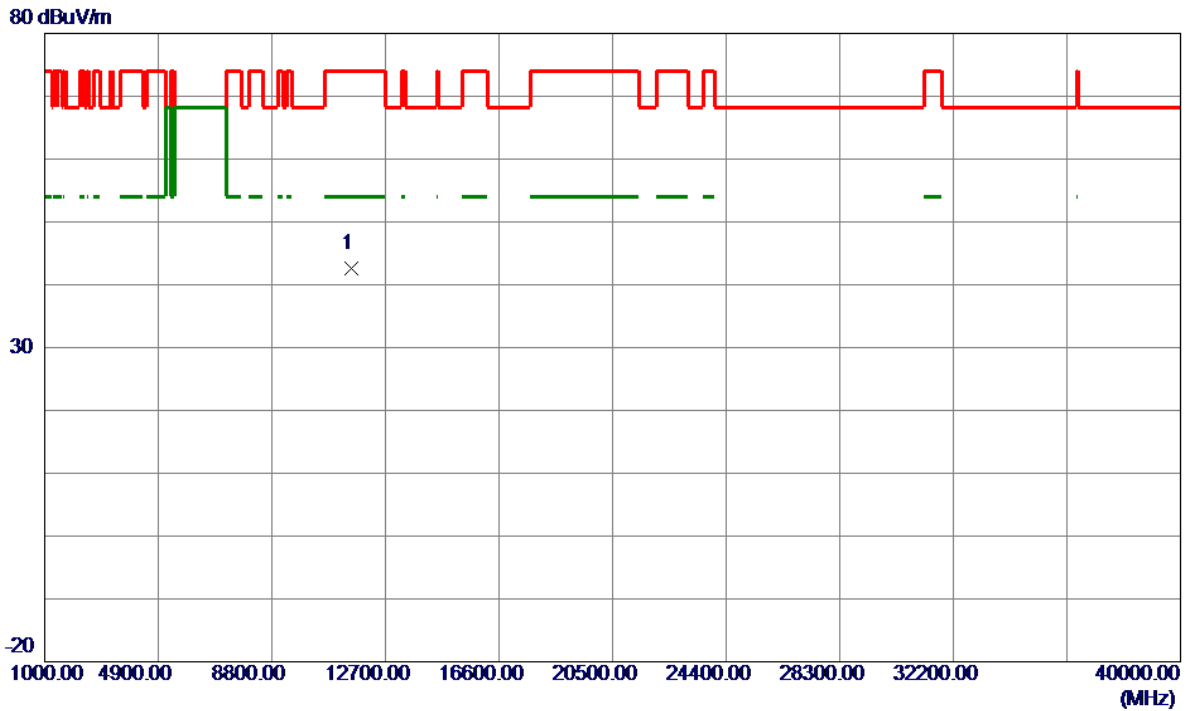

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11550.0000	50.52	-7.99	42.53	74.00	-31.47	Peak	

REMARKS:


- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX E - BANDWIDTH

Test Mode	UNII-1_TX A Mode
-----------	------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
36	5180	20.499	16.600
40	5200	20.550	16.500
48	5240	20.389	16.600

CH36

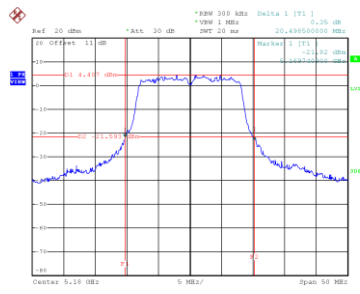


Date: 13-SEP-2022 12:16:23

CH40
26 dB Bandwidth

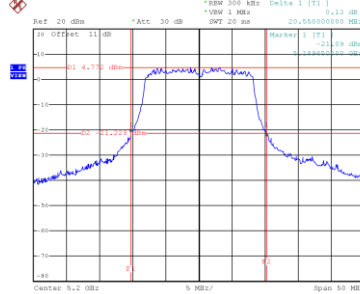


Date: 13-SEP-2022 12:16:15

CH48

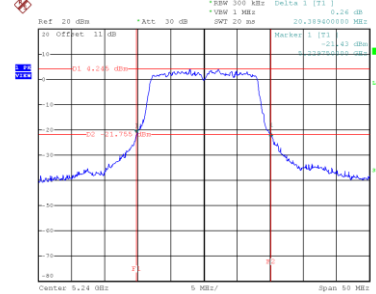


Date: 13-SEP-2022 12:14:18


99 % Occupied Bandwidth

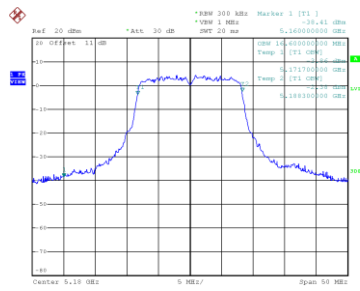

Date: 13-SEP-2022 12:15:51

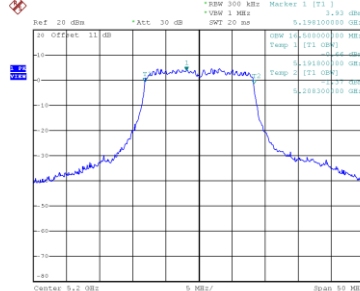

Date: 13-SEP-2022 12:15:45

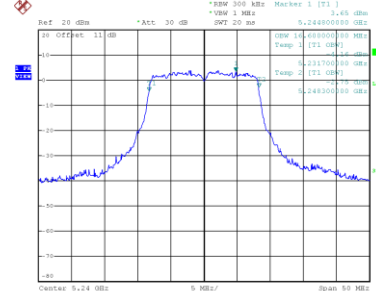


Date: 13-SEP-2022 12:14:18

Test Mode	UNII-1_TX N(HT20) Mode
-----------	------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
36	5180	21.449	17.800
40	5200	21.149	17.800
48	5240	21.489	17.800

CH36

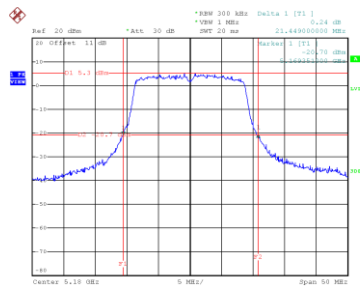


Date: 13-SEP-2022 13:23:00

CH40
26 dB Bandwidth

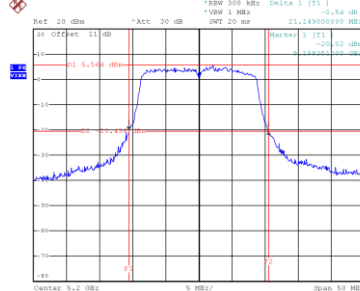


Date: 13-SEP-2022 13:24:56

CH48

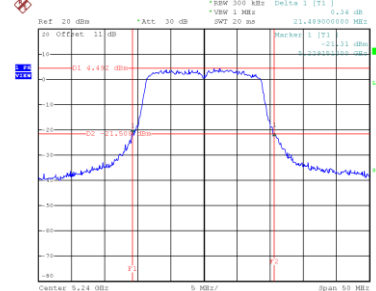


Date: 13-SEP-2022 14:27:08


99 % Occupied Bandwidth

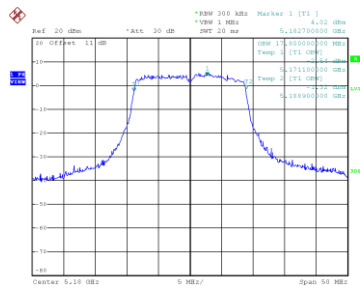

Date: 13-SEP-2022 13:22:29

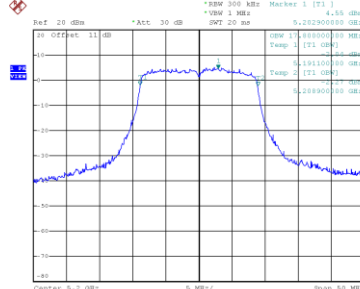

Date: 13-SEP-2022 13:24:27

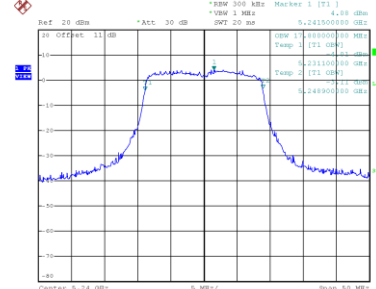


Date: 13-SEP-2022 14:26:38

Test Mode	UNII-1_TX N(HT40) Mode
-----------	------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
38	5190	40.788	36.400
46	5230	40.900	36.400

CH38

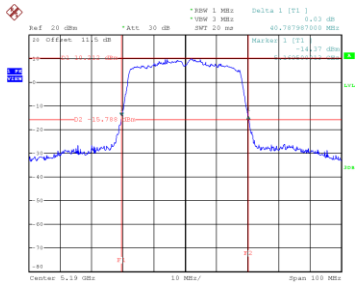


Date: 1.DEC.2022 10:25:44

CH46
26 dB Bandwidth

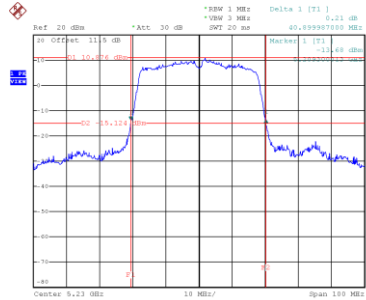


Date: 1.DEC.2022 10:30:08

99 % Occupied Bandwidth

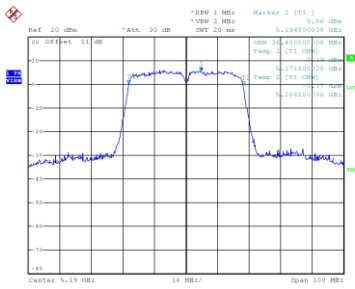

Date: 13.SEP.2022 16:18:48

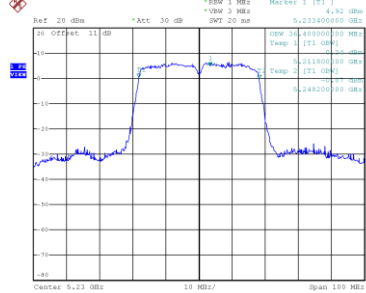


Date: 13.SEP.2022 16:20:37

Test Mode	UNII-1_TX AC(VHT80) Mode
-----------	--------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
42	5210	87.000	76.000

CH42
26 dB Bandwidth

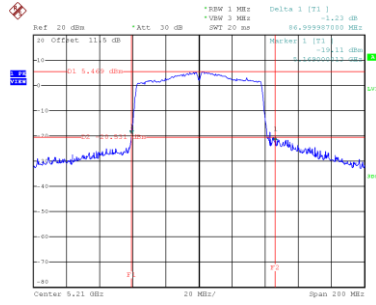

Date: 30.NOV.2022 11:08:15

99 % Occupied Bandwidth

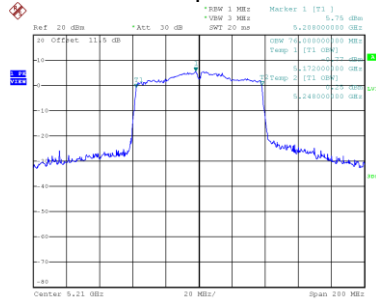


Date: 30.NOV.2022 11:06:26

Test Mode	UNII-1_TX AX(HE20) Mode
-----------	-------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
36	5180	21.850	19.000
40	5200	21.490	19.100
48	5240	21.300	19.000

CH36

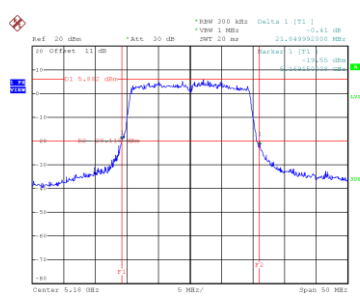


Date: 13-SEP-2022 15:15:20

CH40
26 dB Bandwidth

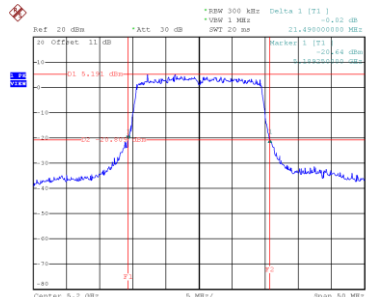


Date: 13-SEP-2022 15:17:53

CH48

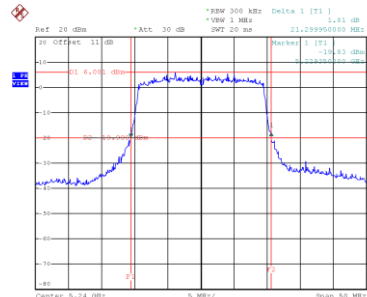


Date: 13-SEP-2022 15:19:13


99 % Occupied Bandwidth

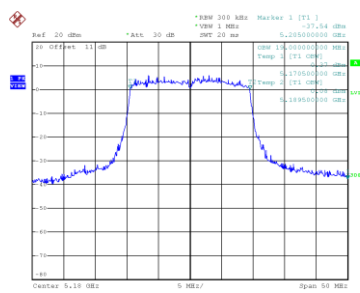

Date: 13-SEP-2022 15:14:49

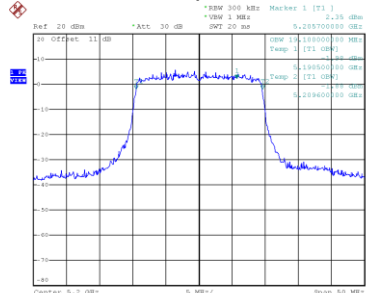

Date: 13-SEP-2022 15:17:22

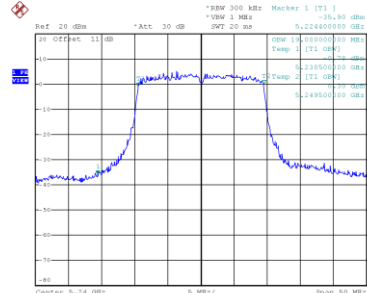


Date: 13-SEP-2022 15:18:43

Test Mode	UNII-1_TX AX(HE40) Mode
-----------	-------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
38	5190	41.600	38.000
46	5230	42.100	38.000

CH38

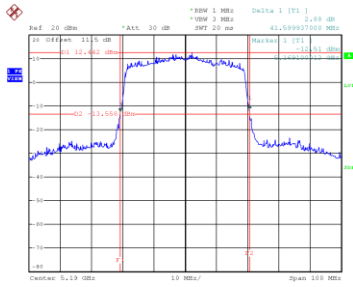


Date: 1.DEC.2022 10:46:43

CH46
26 dB Bandwidth

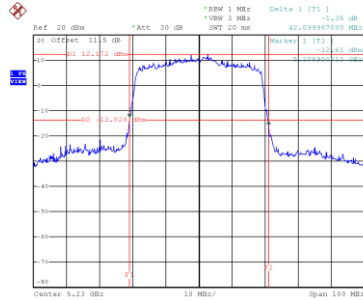


Date: 1.DEC.2022 10:47:58

99 % Occupied Bandwidth

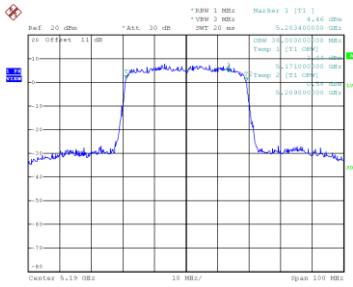

Date: 13.SEP.2022 16:48:52

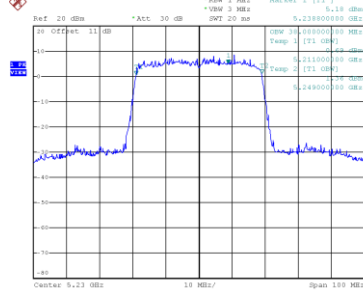


Date: 13.SEP.2022 16:57:25

Test Mode	UNII-1_TX AX(HE80) Mode
-----------	-------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
42	5210	82.600	77.600

CH42 26 dB Bandwidth

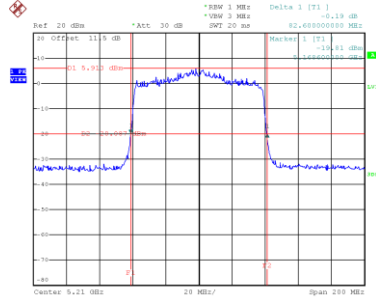

Date: 1.OCT.2022 10:58:23







99 % Occupied Bandwidth

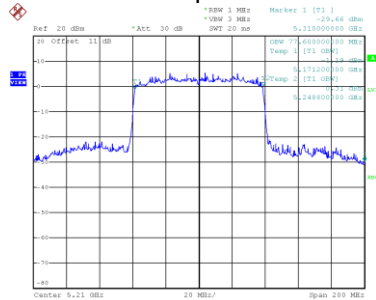

Date: 13.SEP.2022 16:20:14

Test Mode	UNII-2A_TX A Mode
-----------	-------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
52	5260	20.489	16.600
60	5300	20.489	16.600
64	5320	20.450	16.600

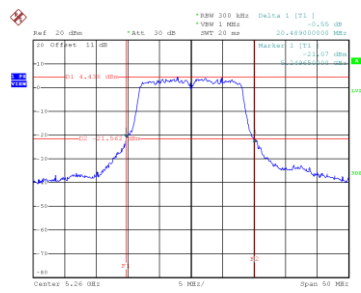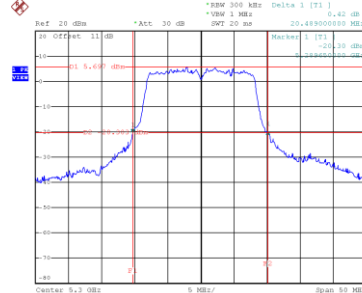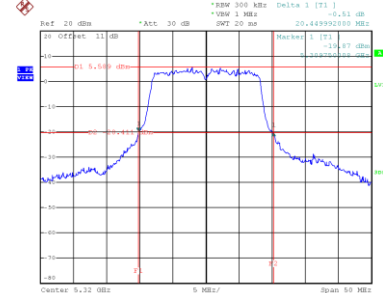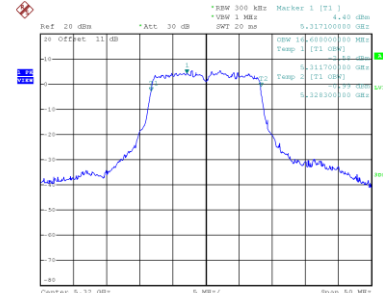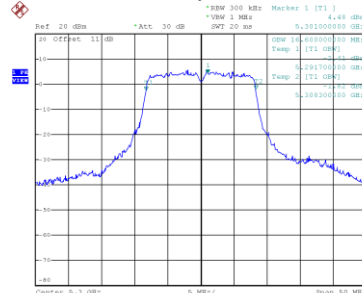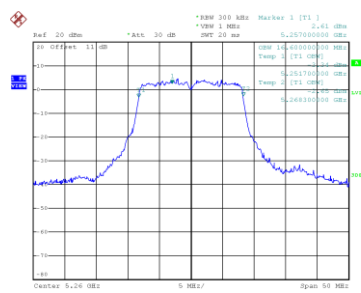CH52

CH60
 26 dB Bandwidth

CH64

99 % Occupied Bandwidth

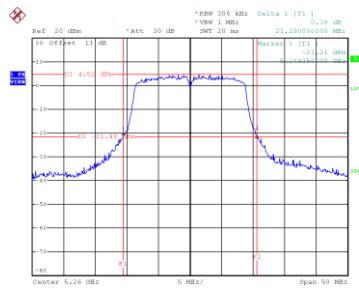
Test Mode	UNII-2A_TX N(HT20) Mode
-----------	-------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
52	5260	21.290	17.700
60	5300	21.250	17.800
64	5320	21.350	17.800

CH52




Date: 13-SEP-2022 14:52:48

CH60
26 dB Bandwidth

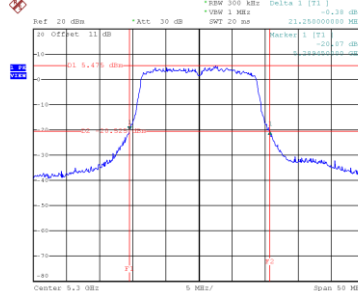


Date: 13-SEP-2022 14:57:34

CH64

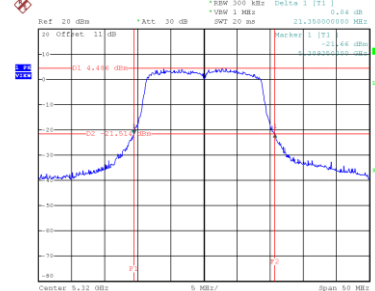


Date: 13-SEP-2022 15:00:15


99 % Occupied Bandwidth

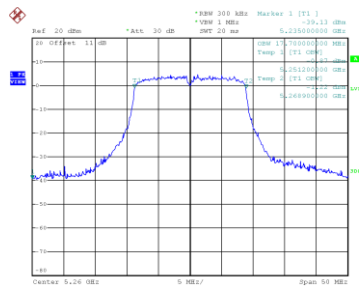

Date: 13-SEP-2022 14:52:15

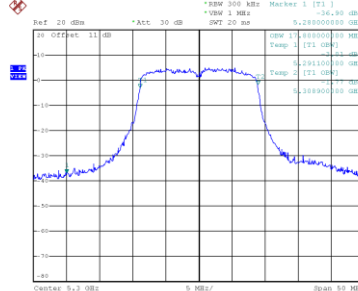

Date: 13-SEP-2022 14:57:04

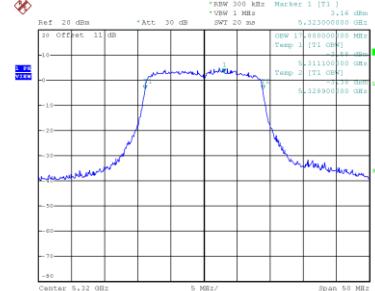


Date: 13-SEP-2022 14:59:45

Test Mode	UNII-2A_TX N(HT40) Mode
-----------	-------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
54	5270	41.400	36.400
62	5310	40.900	36.400

CH54

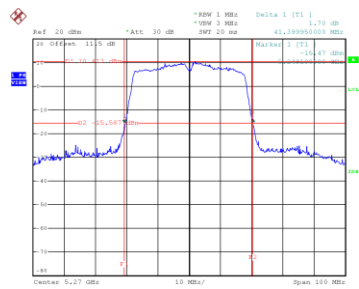


Date: 1.DEC.2022 10:31:57

CH62
26 dB Bandwidth

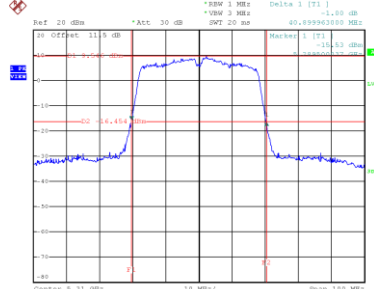


Date: 1.DEC.2022 10:33:11

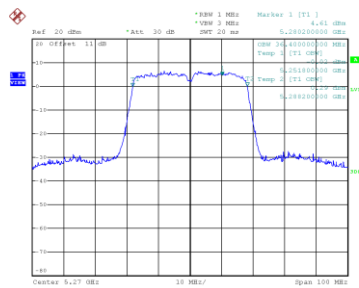

Date: 13.SEP.2022 16:24:15

99 % Occupied Bandwidth

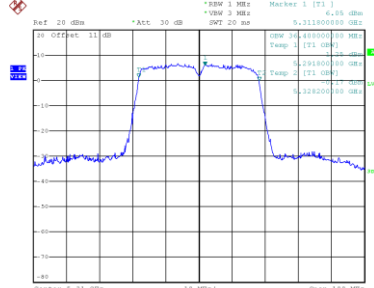


Date: 13.SEP.2022 16:25:149

Test Mode	UNII-2A_TX AC(VHT80) Mode
-----------	---------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
58	5290	83.000	76.000

CH58
26 dB Bandwidth

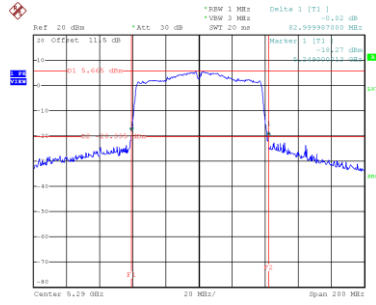

Date: 30.NOV.2022 11:17:42

99 % Occupied Bandwidth

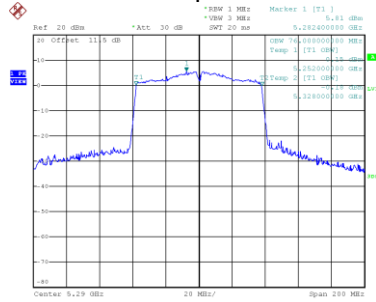


Date: 30.NOV.2022 11:16:49

Test Mode	UNII-2A_TX AX(HE20) Mode
-----------	--------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
52	5260	21.850	19.000
60	5300	21.450	19.000
64	5320	21.800	19.000

CH52

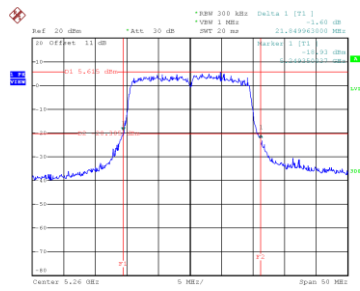


Date: 13-SEP-2022 15:21:33

CH60
26 dB Bandwidth

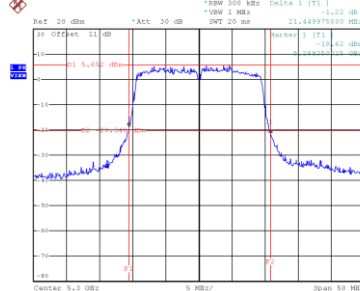


Date: 13-SEP-2022 15:25:48

CH64

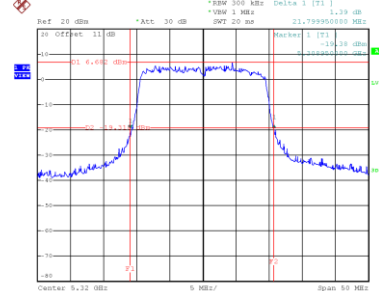


Date: 13-SEP-2022 15:27:00


99 % Occupied Bandwidth

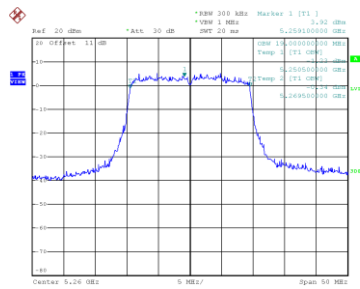

Date: 13-SEP-2022 15:21:02

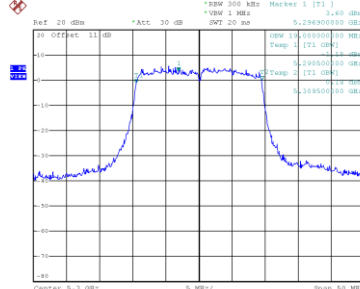

Date: 13-SEP-2022 15:25:16

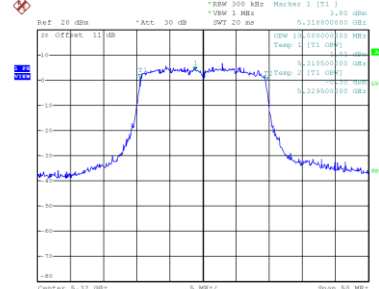


Date: 13-SEP-2022 15:26:29

Test Mode	UNII-2A_TX AX(HE40) Mode
-----------	--------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
54	5270	42.000	38.000
62	5310	41.608	38.200

CH54

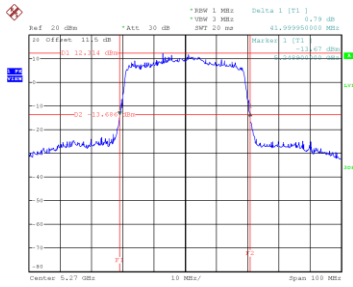


Date: 1.DEC.2022 10:50:02

CH62
26 dB Bandwidth

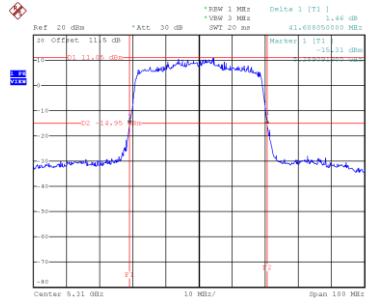


Date: 1.DEC.2022 10:51:16

99 % Occupied Bandwidth

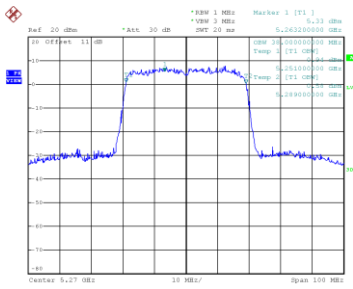

Date: 13.SEP.2022 17:04:32

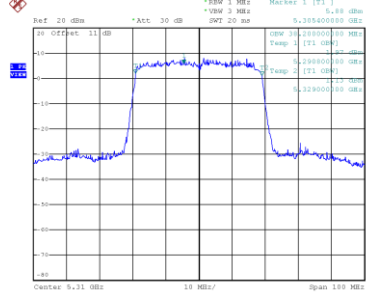


Date: 13.SEP.2022 17:10:01

Test Mode	UNII-2A_TX AX(HE80) Mode
-----------	--------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
58	5290	86.200	77.600

CH58
26 dB Bandwidth

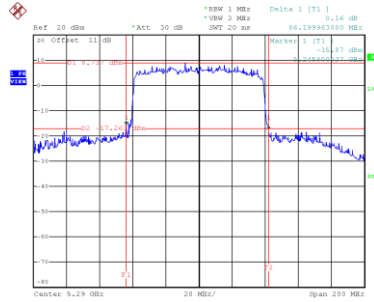

Date: 13-SEP-2022 16:28:28

99 % Occupied Bandwidth

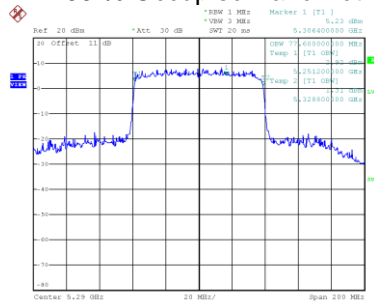


Date: 13-SEP-2022 16:25:08

Test Mode	UNII-2C_TX A Mode
-----------	-------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
100	5500	20.198	16.600
116	5580	20.499	16.600
140	5700	20.590	16.600

CH100

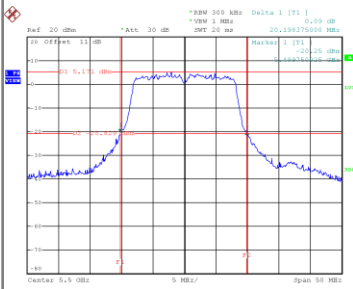


Date: 13.8EP.2022 13:00:19

CH116
26 dB Bandwidth

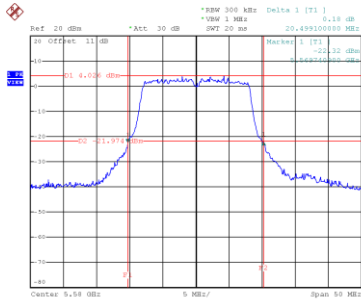


Date: 13.8EP.2022 13:02:06

CH140

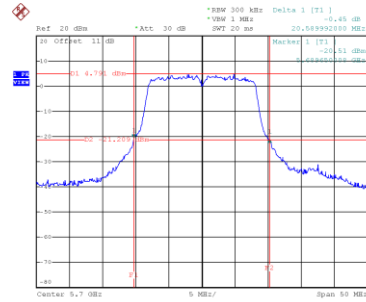


Date: 13.8EP.2022 13:06:56


99 % Occupied Bandwidth

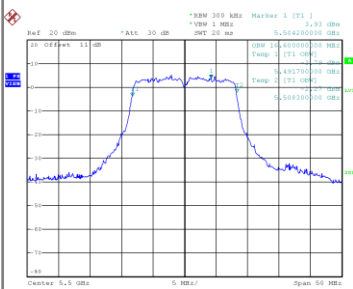

Date: 13.8EP.2022 13:00:06

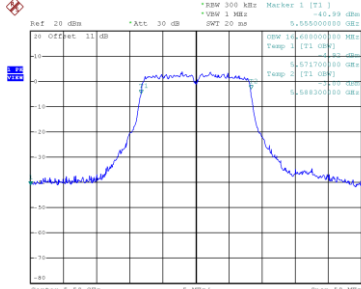

Date: 13.8EP.2022 13:01:36

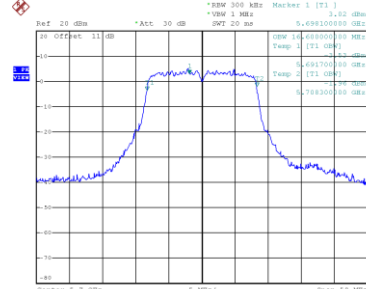


Date: 13.8EP.2022 13:06:24

Test Mode	UNII-2C_TX N(HT20) Mode
-----------	-------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
100	5500	21.850	17.700
116	5580	21.050	17.800
140	5700	21.389	17.800

CH100

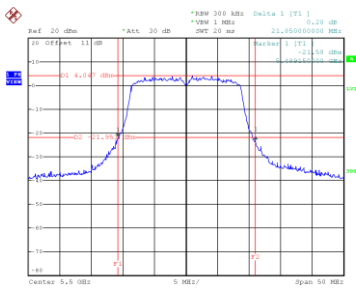


Date: 13-SEP-2022 15:01:42

CH116
26 dB Bandwidth

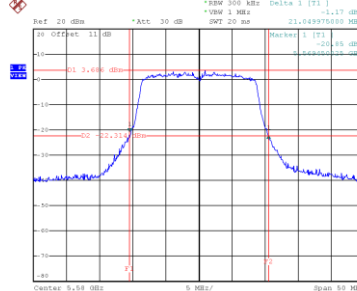


Date: 13-SEP-2022 15:04:50

CH140

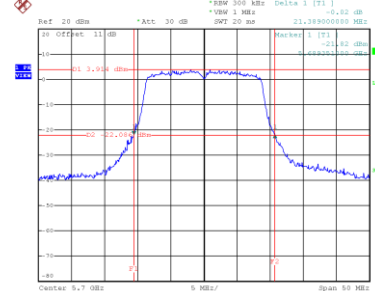


Date: 13-SEP-2022 15:06:14


99 % Occupied Bandwidth

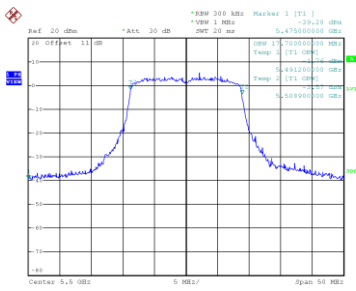

Date: 13-SEP-2022 15:01:13

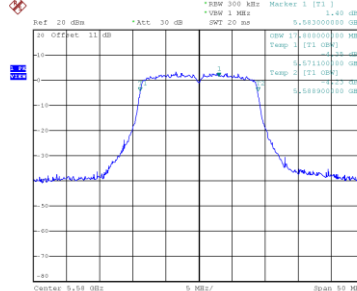

Date: 13-SEP-2022 15:04:19

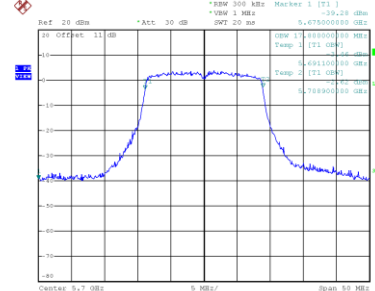


Date: 13-SEP-2022 15:05:43

Test Mode	UNII-2C_TX N(HT40) Mode
-----------	-------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
102	5510	40.199	36.400
110	5550	39.900	36.400
134	5670	39.700	36.400

CH102

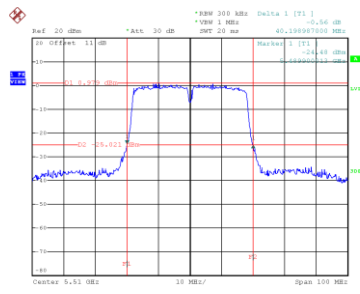


Date: 13-SEP-2022 16:30:09

CH110
26 dB Bandwidth

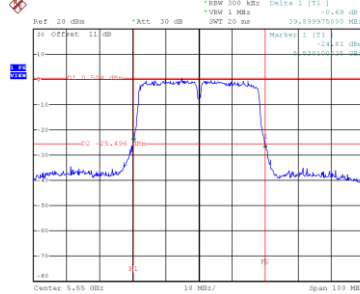


Date: 13-SEP-2022 16:32:05

CH134

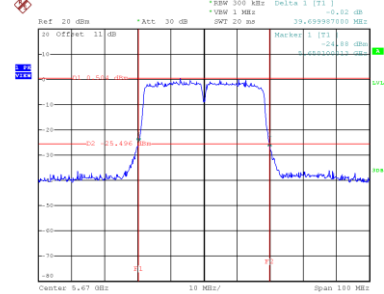


Date: 13-SEP-2022 16:37:30


99 % Occupied Bandwidth

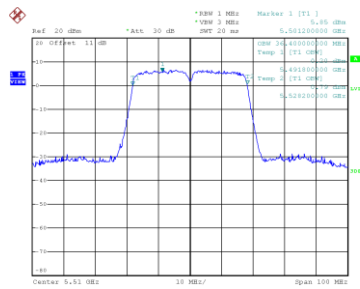

Date: 13-SEP-2022 16:29:22

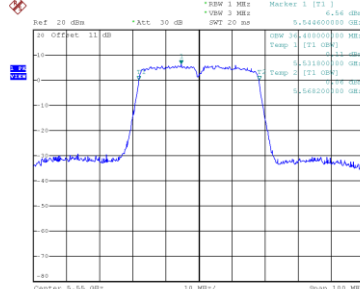


Date: 13-SEP-2022 16:33:17

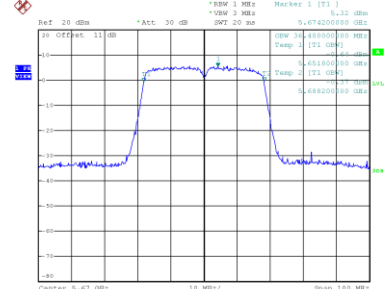


Date: 13-SEP-2022 16:36:44

Test Mode	UNII-2C_TX AC(VHT80) Mode
-----------	---------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
106	5530	82.600	75.600
122	5610	83.200	76.000

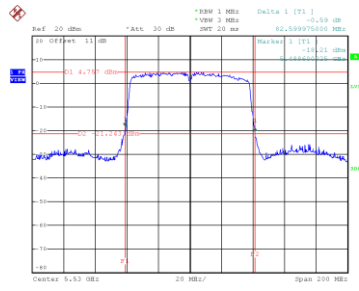CH106


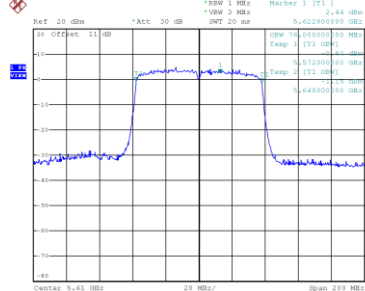
Date: 13_SEP_2022 18:10:17

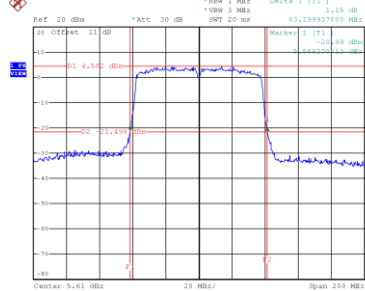CH122
26 dB Bandwidth


Date: 13_SEP_2022 18:11:58

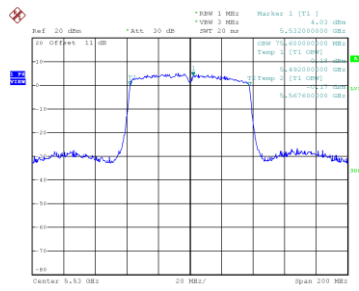99 % Occupied Bandwidth


Date: 13_SEP_2022 18:09:34




Date: 13_SEP_2022 18:11:18

Test Mode	UNII-2C_TX AX(HE20) Mode
-----------	--------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
100	5500	21.499	19.000
116	5580	21.550	19.000
140	5700	21.690	19.100

CH100

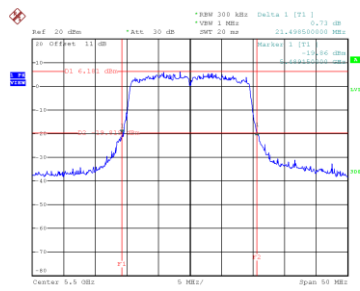


Date: 13-SEP-2022 15:30:58

CH116
26 dB Bandwidth

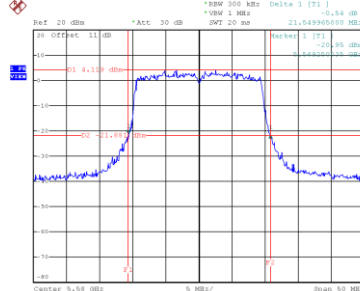


Date: 13-SEP-2022 15:58:01

CH140

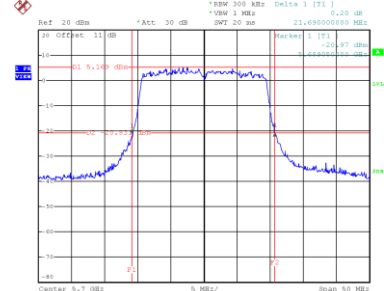


Date: 13-SEP-2022 16:02:33


99 % Occupied Bandwidth

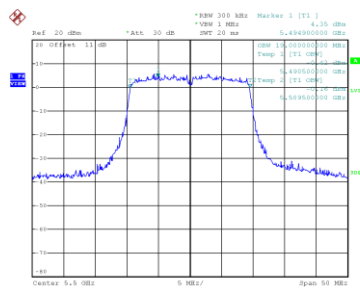

Date: 13-SEP-2022 15:30:57

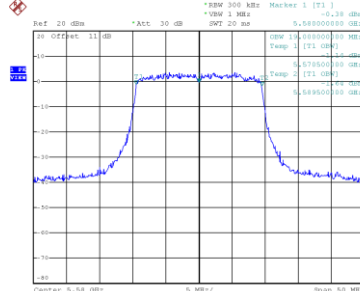

Date: 13-SEP-2022 15:57:29

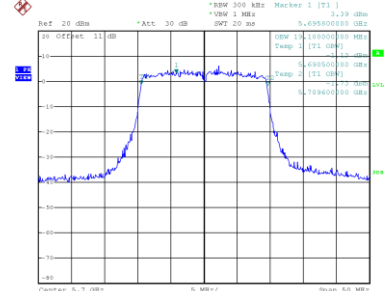


Date: 13-SEP-2022 16:02:02

Test Mode	UNII-2C_TX AX(HE40) Mode
-----------	--------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
102	5510	40.200	38.000
110	5550	40.409	38.000
134	5670	40.300	38.000

CH102

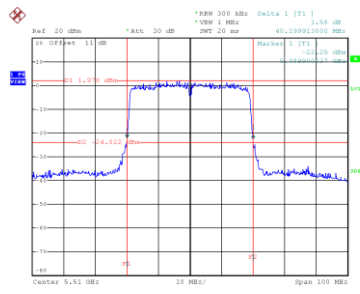


Date: 13-SEP-2022 17:13:07

CH110
26 dB Bandwidth

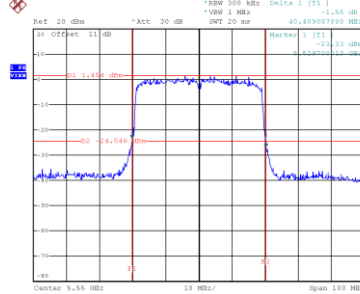


Date: 13-SEP-2022 17:17:46

CH134

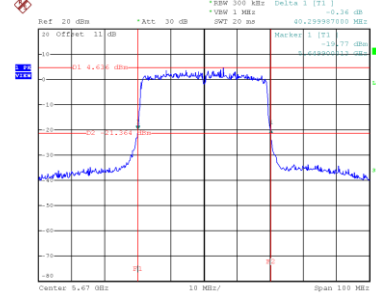


Date: 13-SEP-2022 17:44:38


99 % Occupied Bandwidth

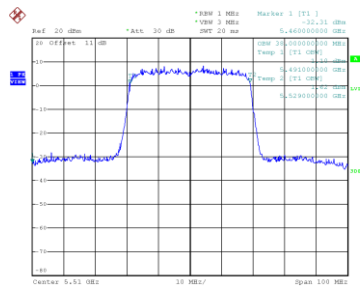

Date: 13-SEP-2022 17:12:15

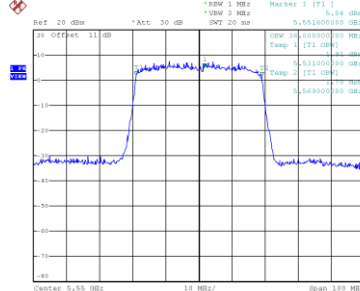

Date: 13-SEP-2022 17:17:01

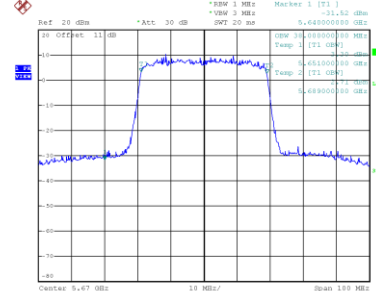


Date: 13-SEP-2022 17:43:04

Test Mode	UNII-2C_TX AX(HE80) Mode
-----------	--------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
106	5530	83.200	77.600
122	5610	83.400	77.600

CH106

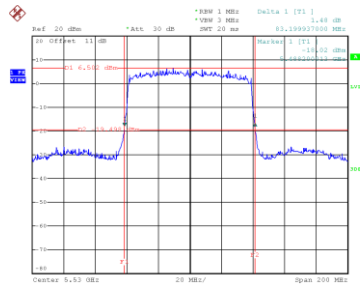


Date: 13.SEP.2022 18:30:15

CH122
26 dB Bandwidth

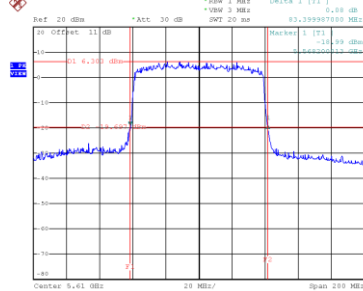


Date: 13.SEP.2022 18:33:38

99 % Occupied Bandwidth

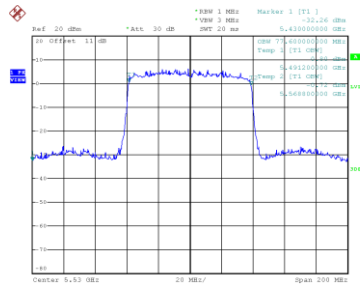

Date: 13.SEP.2022 18:29:35

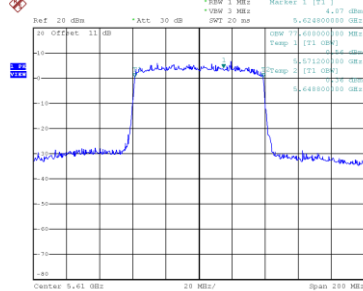


Date: 13.SEP.2022 18:32:59

Test Mode	UNII-3_TX A Mode
-----------	------------------

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Result
149	5745	16.087	16.600	0.5	Complies
157	5785	16.098	16.600	0.5	Complies
165	5825	16.288	16.600	0.5	Complies


CH149

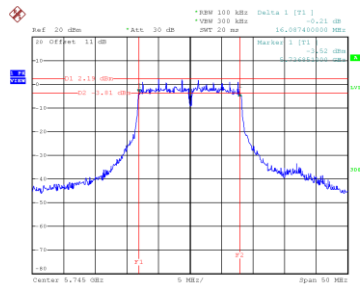

Date: 13-SEP-2022 13:10:15


CH157

6 dB Bandwidth

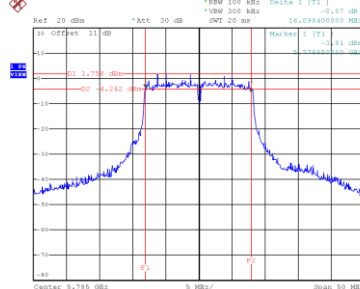


Date: 13-SEP-2022 13:11:31

CH165

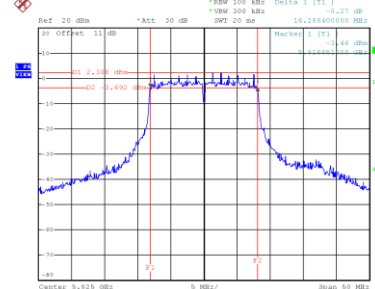


Date: 13-SEP-2022 13:11:59


99 % Occupied Bandwidth

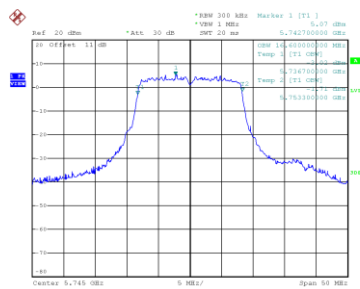

Date: 13-SEP-2022 13:10:17

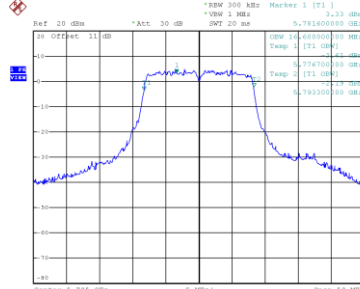


Date: 13-SEP-2022 13:12:17

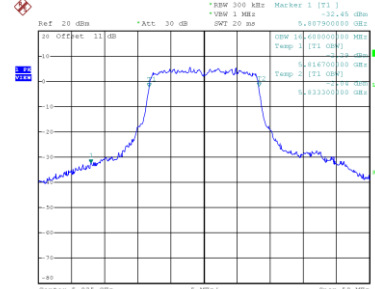


Date: 13-SEP-2022 13:11:25

Test Mode	UNII-3_TX N(HT20) Mode
------------------	-------------------------------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Result
149	5745	17.549	17.800	0.5	Complies
157	5785	17.700	17.800	0.5	Complies
165	5825	17.489	17.800	0.5	Complies

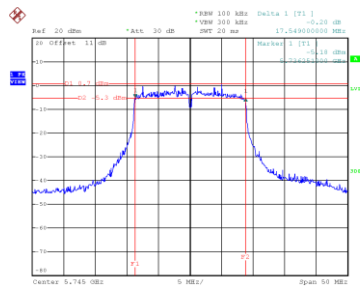CH149


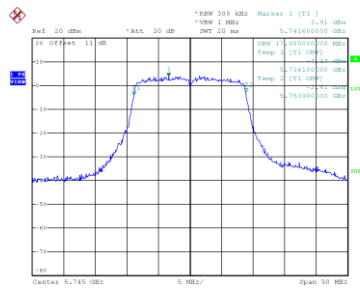
Date: 13-SEP-2022 15:08:59

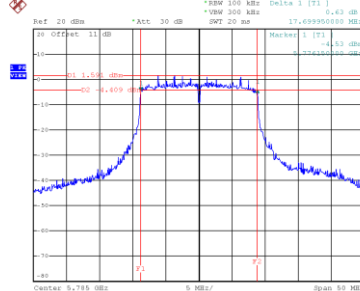**CH157
6 dB Bandwidth**


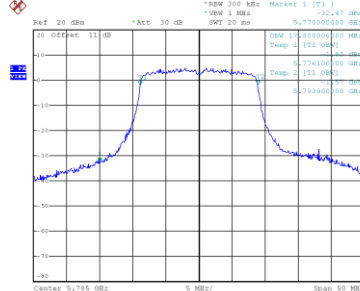
Date: 13-SEP-2022 15:10:22

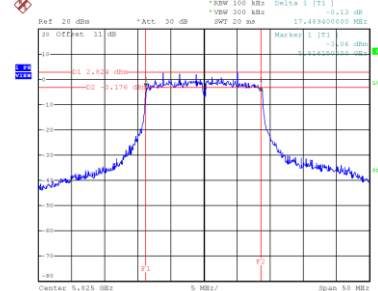CH165


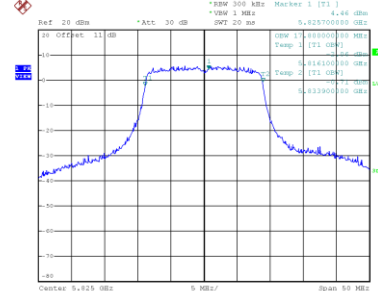
Date: 13-SEP-2022 15:13:27

99 % Occupied Bandwidth


Date: 13-SEP-2022 15:08:27



Date: 13-SEP-2022 15:09:49




Date: 13-SEP-2022 15:12:55

Test Mode	UNII-3_TX N(HT40) Mode
-----------	------------------------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Result
151	5755	36.399	36.400	0.5	Complies
159	5795	36.390	36.400	0.5	Complies

CH151

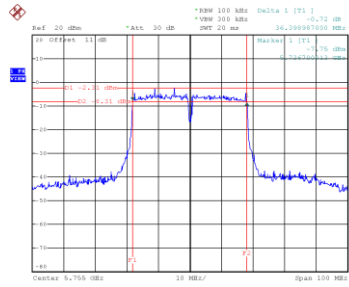


Date: 13_SEP_2022 16:39:29

CH159
6 dB Bandwidth

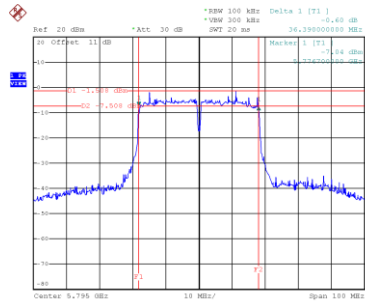


Date: 13_SEP_2022 16:44:10

99 % Occupied Bandwidth

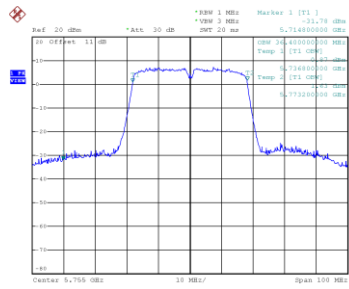

Date: 13_SEP_2022 16:39:43

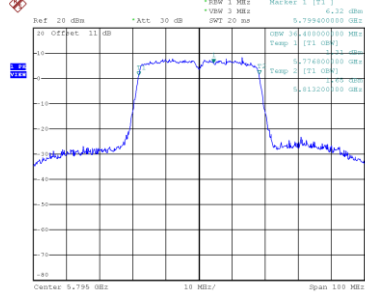


Date: 13_SEP_2022 16:43:24

Test Mode	UNII-3_TX AC(VHT80) Mode
-----------	--------------------------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Result
155	5775	75.600	76.000	0.5	Complies

CH155
6 dB Bandwidth

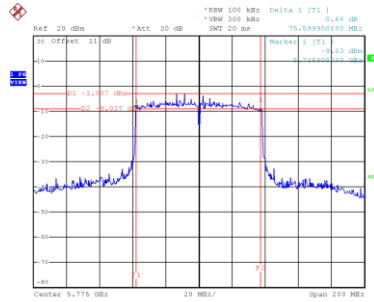

Date: 13.SEP.2022 18:18:51

99 % Occupied Bandwidth

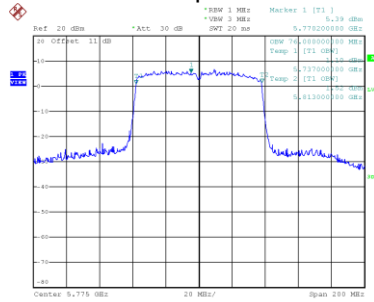


Date: 13.SEP.2022 18:18:11

Test Mode	UNII-3_TX AX(HE20) Mode
-----------	-------------------------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Result
149	5745	19.050	19.000	0.5	Complies
157	5785	18.698	19.100	0.5	Complies
165	5825	18.950	19.200	0.5	Complies

CH149

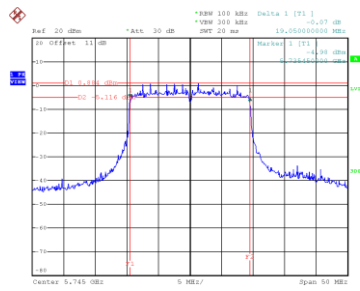


Date: 13-SEP-2022 16:04:11

CH157
6 dB Bandwidth

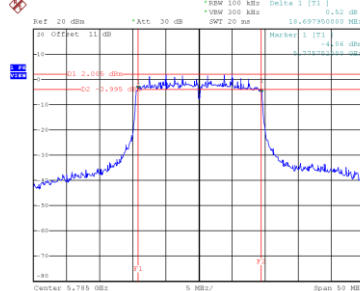


Date: 13-SEP-2022 16:08:52

CH165

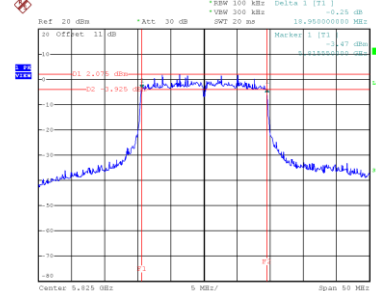


Date: 13-SEP-2022 16:11:36


99 % Occupied Bandwidth

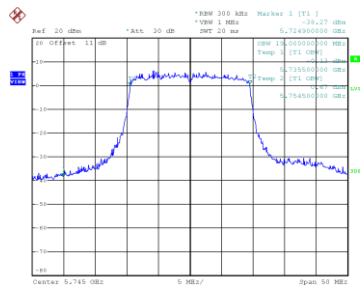

Date: 13-SEP-2022 16:03:39

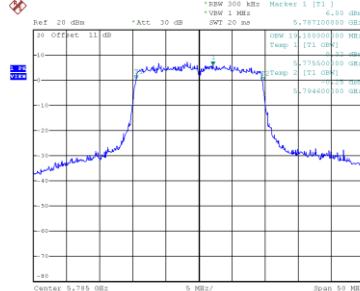

Date: 13-SEP-2022 16:08:20

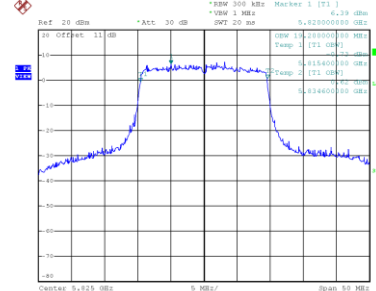


Date: 13-SEP-2022 16:11:04

Test Mode	UNII-3_TX AX(HE40) Mode
-----------	-------------------------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Result
151	5755	37.809	38.200	0.5	Complies
159	5795	37.999	38.000	0.5	Complies

CH151

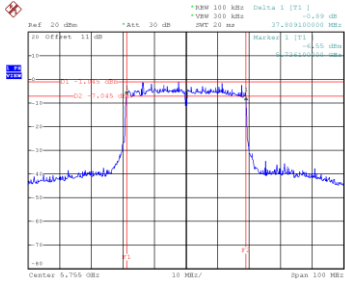


Date: 13.SEP.2022 17:49:54

**CH159
6 dB Bandwidth**

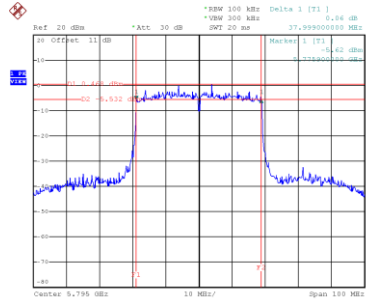


Date: 13.SEP.2022 17:51:33

99 % Occupied Bandwidth

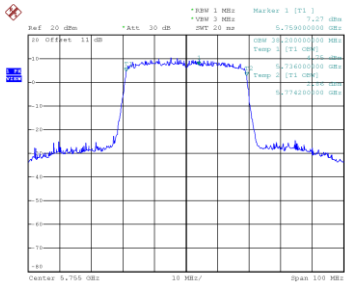

Date: 13.SEP.2022 17:49:12

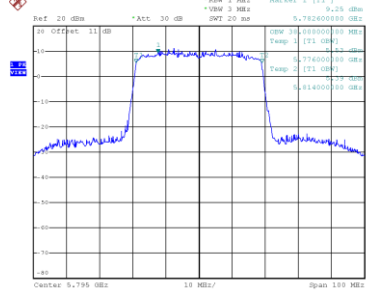


Date: 13.SEP.2022 17:50:50

Test Mode	UNII-3_TX AX(HE80) Mode
-----------	-------------------------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Result
155	5775	77.600	77.600	0.5	Complies

CH155
6 dB Bandwidth

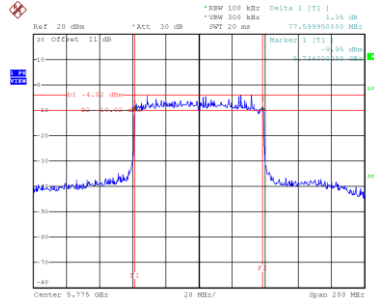

Date: 13_SEP.2022 16:37:16

99 % Occupied Bandwidth

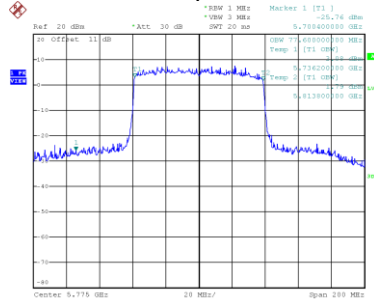

Date: 13_SEP.2022 16:36:33

APPENDIX F - MAXIMUM OUTPUT POWER

Test Mode	UNII-1_TX A Mode_Ant. 1
-----------	-------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
36	5180	13.70	0.00	13.70	23.98	0.2500	Complies
40	5200	15.05	0.00	15.05	23.98	0.2500	Complies
48	5240	15.04	0.00	15.04	23.98	0.2500	Complies

Test Mode	UNII-1_TX A Mode_Ant. 2
-----------	-------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
36	5180	14.00	0.00	14.00	23.98	0.2500	Complies
40	5200	15.09	0.00	15.09	23.98	0.2500	Complies
48	5240	15.42	0.00	15.42	23.98	0.2500	Complies

Test Mode	UNII-1_TX A Mode_Total
-----------	------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
36	5180	16.86	23.98	0.2500	Complies
40	5200	18.08	23.98	0.2500	Complies
48	5240	18.24	23.98	0.2500	Complies

Test Mode	UNII-1_TX N(HT20) Mode_Ant. 1
-----------	-------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
36	5180	15.24	0.00	15.24	23.98	0.2500	Complies
40	5200	15.13	0.00	15.13	23.98	0.2500	Complies
48	5240	15.03	0.00	15.03	23.98	0.2500	Complies

Test Mode	UNII-1_TX N(HT20) Mode_Ant. 2
-----------	-------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
36	5180	15.26	0.00	15.26	23.98	0.2500	Complies
40	5200	15.32	0.00	15.32	23.98	0.2500	Complies
48	5240	15.16	0.00	15.16	23.98	0.2500	Complies

Test Mode	UNII-1_TX N(HT20) Mode_Total
-----------	------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
36	5180	18.26	23.98	0.2500	Complies
40	5200	18.24	23.98	0.2500	Complies
48	5240	18.11	23.98	0.2500	Complies

Test Mode	UNII-1_TX N(HT40) Mode_Ant. 1
-----------	-------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
38	5190	15.05	0.00	15.05	23.98	0.2500	Complies
46	5230	15.36	0.00	15.36	23.98	0.2500	Complies

Test Mode	UNII-1_TX N(HT40) Mode_Ant. 2
-----------	-------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
38	5190	15.27	0.00	15.27	23.98	0.2500	Complies
46	5230	15.50	0.00	15.50	23.98	0.2500	Complies

Test Mode	UNII-1_TX N(HT40) Mode_Total
-----------	------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
38	5190	18.17	23.98	0.2500	Complies
46	5230	18.44	23.98	0.2500	Complies

Test Mode	UNII-1_TX AC(VHT20) Mode_Ant. 1
-----------	---------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
36	5180	15.09	0.00	15.09	23.98	0.2500	Complies
40	5200	15.04	0.00	15.04	23.98	0.2500	Complies
48	5240	14.86	0.00	14.86	23.98	0.2500	Complies

Test Mode	UNII-1_TX AC(VHT20) Mode_Ant. 2
-----------	---------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
36	5180	15.18	0.00	15.18	23.98	0.2500	Complies
40	5200	15.28	0.00	15.28	23.98	0.2500	Complies
48	5240	15.11	0.00	15.11	23.98	0.2500	Complies

Test Mode	UNII-1_TX AC(VHT20) Mode_Total
-----------	--------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
36	5180	18.15	23.98	0.2500	Complies
40	5200	18.17	23.98	0.2500	Complies
48	5240	18.00	23.98	0.2500	Complies

Test Mode	UNII-1_TX AC(VHT40) Mode_Ant. 1
-----------	---------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
38	5190	15.03	0.00	15.03	23.98	0.2500	Complies
46	5230	15.34	0.00	15.34	23.98	0.2500	Complies

Test Mode	UNII-1_TX AC(VHT40) Mode_Ant. 2
-----------	---------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
38	5190	15.22	0.00	15.22	23.98	0.2500	Complies
46	5230	15.42	0.00	15.42	23.98	0.2500	Complies

Test Mode	UNII-1_TX AC(VHT40) Mode_Total
-----------	--------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
38	5190	18.14	23.98	0.2500	Complies
46	5230	18.39	23.98	0.2500	Complies

Test Mode	UNII-1_TX AC(VHT80) Mode_Ant. 1
-----------	---------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
42	5210	12.53	0.00	12.53	23.98	0.2500	Complies

Test Mode	UNII-1_TX AC(VHT80) Mode_Ant. 2
-----------	---------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
42	5210	13.18	0.00	13.18	23.98	0.2500	Complies

Test Mode	UNII-1_TX AC(VHT80) Mode_Total
-----------	--------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
42	5210	15.88	23.98	0.2500	Complies

Test Mode	UNII-1_TX AX(HE20) Mode_Ant. 1
-----------	--------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
36	5180	15.47	0.00	15.47	23.98	0.2500	Complies
40	5200	15.32	0.00	15.32	23.98	0.2500	Complies
48	5240	15.16	0.00	15.16	23.98	0.2500	Complies

Test Mode	UNII-1_TX AX(HE20) Mode_Ant. 2
-----------	--------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
36	5180	15.50	0.00	15.50	23.98	0.2500	Complies
40	5200	15.48	0.00	15.48	23.98	0.2500	Complies
48	5240	15.47	0.00	15.47	23.98	0.2500	Complies

Test Mode	UNII-1_TX AX(HE20) Mode_Total
-----------	-------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
36	5180	18.50	23.98	0.2500	Complies
40	5200	18.41	23.98	0.2500	Complies
48	5240	18.33	23.98	0.2500	Complies

Test Mode	UNII-1_TX AX(HE40) Mode_Ant. 1
-----------	--------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
38	5190	15.19	0.00	15.19	23.98	0.2500	Complies
46	5230	15.14	0.00	15.14	23.98	0.2500	Complies

Test Mode	UNII-1_TX AX(HE40) Mode_Ant. 2
-----------	--------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
38	5190	15.29	0.00	15.29	23.98	0.2500	Complies
46	5230	15.19	0.00	15.19	23.98	0.2500	Complies

Test Mode	UNII-1_TX AX(HE40) Mode_Total
-----------	-------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
38	5190	18.25	23.98	0.2500	Complies
46	5230	18.18	23.98	0.2500	Complies

Test Mode	UNII-1_TX AX(HE80) Mode_Ant. 1
-----------	--------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
42	5210	13.64	0.00	13.64	23.98	0.2500	Complies

Test Mode	UNII-1_TX AX(HE80) Mode_Ant. 2
-----------	--------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
42	5210	13.77	0.00	13.77	23.98	0.2500	Complies

Test Mode	UNII-1_TX AX(HE80) Mode_Total
-----------	-------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
42	5210	16.72	23.98	0.2500	Complies

Test Mode	UNII-2A_TX A Mode_Ant. 1
-----------	--------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
52	5260	15.22	0.00	15.22	23.98	0.2500	Complies
60	5300	15.11	0.00	15.11	23.98	0.2500	Complies
64	5320	13.24	0.00	13.24	23.98	0.2500	Complies

Test Mode	UNII-2A_TX A Mode_Ant. 2
-----------	--------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
52	5260	15.26	0.00	15.26	23.98	0.2500	Complies
60	5300	15.37	0.00	15.37	23.98	0.2500	Complies
64	5320	13.69	0.00	13.69	23.98	0.2500	Complies

Test Mode	UNII-2A_TX A Mode_Total
-----------	-------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
52	5260	18.25	23.98	0.2500	Complies
60	5300	18.25	23.98	0.2500	Complies
64	5320	16.48	23.98	0.2500	Complies

Test Mode	UNII-2A_TX N(HT20) Mode_Ant. 1
-----------	--------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
52	5260	15.26	0.00	15.26	23.98	0.2500	Complies
60	5300	15.16	0.00	15.16	23.98	0.2500	Complies
64	5320	15.20	0.00	15.20	23.98	0.2500	Complies

Test Mode	UNII-2A_TX N(HT20) Mode_Ant. 2
-----------	--------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
52	5260	15.49	0.00	15.49	23.98	0.2500	Complies
60	5300	15.55	0.00	15.55	23.98	0.2500	Complies
64	5320	15.23	0.00	15.23	23.98	0.2500	Complies

Test Mode	UNII-2A_TX N(HT20) Mode_Total
-----------	-------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
52	5260	18.39	23.98	0.2500	Complies
60	5300	18.37	23.98	0.2500	Complies
64	5320	18.23	23.98	0.2500	Complies

Test Mode	UNII-2A_TX N(HT40) Mode_Ant. 1
-----------	--------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
54	5270	15.17	0.00	15.17	23.98	0.2500	Complies
62	5310	13.78	0.00	13.78	23.98	0.2500	Complies

Test Mode	UNII-2A_TX N(HT40) Mode_Ant. 2
-----------	--------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
54	5270	15.27	0.00	15.27	23.98	0.2500	Complies
62	5310	14.60	0.00	14.60	23.98	0.2500	Complies

Test Mode	UNII-2A_TX N(HT40) Mode_Total
-----------	-------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
54	5270	18.23	23.98	0.2500	Complies
62	5310	17.22	23.98	0.2500	Complies

Test Mode	UNII-2A_TX AC(VHT20) Mode_Ant. 1
-----------	----------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
52	5260	15.11	0.00	15.11	23.98	0.2500	Complies
60	5300	15.15	0.00	15.15	23.98	0.2500	Complies
64	5320	15.12	0.00	15.12	23.98	0.2500	Complies

Test Mode	UNII-2A_TX AC(VHT20) Mode_Ant. 2
-----------	----------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
52	5260	15.40	0.00	15.40	23.98	0.2500	Complies
60	5300	15.43	0.00	15.43	23.98	0.2500	Complies
64	5320	15.18	0.00	15.18	23.98	0.2500	Complies

Test Mode	UNII-2A_TX AC(VHT20) Mode_Total
-----------	---------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
52	5260	18.27	23.98	0.2500	Complies
60	5300	18.30	23.98	0.2500	Complies
64	5320	18.16	23.98	0.2500	Complies

Test Mode	UNII-2A_TX AC(VHT40) Mode_Ant. 1
-----------	----------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
54	5270	15.08	0.00	15.08	23.98	0.2500	Complies
62	5310	13.78	0.00	13.78	23.98	0.2500	Complies

Test Mode	UNII-2A_TX AC(VHT40) Mode_Ant. 2
-----------	----------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
54	5270	15.09	0.00	15.09	23.98	0.2500	Complies
62	5310	14.58	0.00	14.58	23.98	0.2500	Complies

Test Mode	UNII-2A_TX AC(VHT40) Mode_Total
-----------	---------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
54	5270	18.10	23.98	0.2500	Complies
62	5310	17.21	23.98	0.2500	Complies

Test Mode	UNII-2A_TX AC(VHT80) Mode_Ant. 1
-----------	----------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
58	5290	13.06	0.00	13.06	23.98	0.2500	Complies

Test Mode	UNII-2A_TX AC(VHT80) Mode_Ant. 2
-----------	----------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
58	5290	14.14	0.00	14.14	23.98	0.2500	Complies

Test Mode	UNII-2A_TX AC(VHT80) Mode_Total
-----------	---------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
58	5290	16.64	23.98	0.2500	Complies

Test Mode	UNII-2A_TX AX(HE20) Mode_Ant. 1
-----------	---------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
52	5260	15.19	0.00	15.19	23.98	0.2500	Complies
60	5300	15.29	0.00	15.29	23.98	0.2500	Complies
64	5320	15.14	0.00	15.14	23.98	0.2500	Complies

Test Mode	UNII-2A_TX AX(HE20) Mode_Ant. 2
-----------	---------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
52	5260	15.20	0.00	15.20	23.98	0.2500	Complies
60	5300	15.78	0.00	15.78	23.98	0.2500	Complies
64	5320	15.33	0.00	15.33	23.98	0.2500	Complies

Test Mode	UNII-2A_TX AX(HE20) Mode_Total
-----------	--------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
52	5260	18.21	23.98	0.2500	Complies
60	5300	18.55	23.98	0.2500	Complies
64	5320	18.25	23.98	0.2500	Complies

Test Mode	UNII-2A_TX AX(HE40) Mode_Ant. 1
-----------	---------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
54	5270	15.15	0.00	15.15	23.98	0.2500	Complies
62	5310	13.70	0.00	13.70	23.98	0.2500	Complies

Test Mode	UNII-2A_TX AX(HE40) Mode_Ant. 2
-----------	---------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
54	5270	15.38	0.00	15.38	23.98	0.2500	Complies
62	5310	14.70	0.00	14.70	23.98	0.2500	Complies

Test Mode	UNII-2A_TX AX(HE40) Mode_Total
-----------	--------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
54	5270	18.28	23.98	0.2500	Complies
62	5310	17.24	23.98	0.2500	Complies

Test Mode	UNII-2A_TX AX(HE80) Mode_Ant. 1
-----------	---------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
58	5290	12.92	0.00	12.92	23.98	0.2500	Complies

Test Mode	UNII-2A_TX AX(HE80) Mode_Ant. 2
-----------	---------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
58	5290	13.01	0.00	13.01	23.98	0.2500	Complies

Test Mode	UNII-2A_TX AX(HE80) Mode_Total
-----------	--------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
58	5290	15.98	23.98	0.2500	Complies

Test Mode	UNII-2C_TX A Mode_Ant. 1
-----------	--------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
100	5500	15.17	0.00	15.17	23.98	0.2500	Complies
116	5580	15.14	0.00	15.14	23.98	0.2500	Complies
140	5700	15.27	0.00	15.27	23.98	0.2500	Complies

Test Mode	UNII-2C_TX A Mode_Ant. 2
-----------	--------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
100	5500	16.06	0.00	16.06	23.98	0.2500	Complies
116	5580	15.94	0.00	15.94	23.98	0.2500	Complies
140	5700	15.91	0.00	15.91	23.98	0.2500	Complies

Test Mode	UNII-2C_TX A Mode_Total
-----------	-------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
100	5500	18.65	23.98	0.2500	Complies
116	5580	18.57	23.98	0.2500	Complies
140	5700	18.61	23.98	0.2500	Complies

Test Mode	UNII-2C_TX N(HT20) Mode_Ant. 1
-----------	--------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
100	5500	15.07	0.00	15.07	23.98	0.2500	Complies
116	5580	15.46	0.00	15.46	23.98	0.2500	Complies
140	5700	15.48	0.00	15.48	23.98	0.2500	Complies

Test Mode	UNII-2C_TX N(HT20) Mode_Ant. 2
-----------	--------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
100	5500	15.68	0.00	15.68	23.98	0.2500	Complies
116	5580	16.24	0.00	16.24	23.98	0.2500	Complies
140	5700	16.29	0.00	16.29	23.98	0.2500	Complies

Test Mode	UNII-2C_TX N(HT20) Mode_Total
-----------	-------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
100	5500	18.40	23.98	0.2500	Complies
116	5580	18.88	23.98	0.2500	Complies
140	5700	18.91	23.98	0.2500	Complies

Test Mode	UNII-2C_TX N(HT40) Mode_Ant. 1
-----------	--------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
102	5510	15.44	0.00	15.44	23.98	0.2500	Complies
110	5550	15.46	0.00	15.46	23.98	0.2500	Complies
134	5670	15.08	0.00	15.08	23.98	0.2500	Complies

Test Mode	UNII-2C_TX N(HT40) Mode_Ant. 2
-----------	--------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
102	5510	16.33	0.00	16.33	23.98	0.2500	Complies
110	5550	16.58	0.00	16.58	23.98	0.2500	Complies
134	5670	15.95	0.00	15.95	23.98	0.2500	Complies

Test Mode	UNII-2C_TX N(HT40) Mode_Total
-----------	-------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
102	5510	18.92	23.98	0.2500	Complies
110	5550	19.07	23.98	0.2500	Complies
134	5670	18.55	23.98	0.2500	Complies

Test Mode	UNII-2C_TX AC(VHT20) Mode_Ant. 1
-----------	----------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
100	5500	15.06	0.00	15.06	23.98	0.2500	Complies
116	5580	15.44	0.00	15.44	23.98	0.2500	Complies
140	5700	15.46	0.00	15.46	23.98	0.2500	Complies

Test Mode	UNII-2C_TX AC(VHT20) Mode_Ant. 2
-----------	----------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
100	5500	15.63	0.00	15.63	23.98	0.2500	Complies
116	5580	16.21	0.00	16.21	23.98	0.2500	Complies
140	5700	16.20	0.00	16.20	23.98	0.2500	Complies

Test Mode	UNII-2C_TX AC(VHT20) Mode_Total
-----------	---------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
100	5500	18.36	23.98	0.2500	Complies
116	5580	18.85	23.98	0.2500	Complies
140	5700	18.86	23.98	0.2500	Complies

Test Mode	UNII-2C_TX AC(VHT40) Mode_Ant. 1
-----------	----------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
102	5510	15.43	0.00	15.43	23.98	0.2500	Complies
110	5550	15.38	0.00	15.38	23.98	0.2500	Complies
134	5670	15.06	0.00	15.06	23.98	0.2500	Complies

Test Mode	UNII-2C_TX AC(VHT40) Mode_Ant. 2
-----------	----------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
102	5510	16.27	0.00	16.27	23.98	0.2500	Complies
110	5550	16.56	0.00	16.56	23.98	0.2500	Complies
134	5670	15.93	0.00	15.93	23.98	0.2500	Complies

Test Mode	UNII-2C_TX AC(VHT40) Mode_Total
-----------	---------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
102	5510	18.88	23.98	0.2500	Complies
110	5550	19.02	23.98	0.2500	Complies
134	5670	18.53	23.98	0.2500	Complies

Test Mode	UNII-2C_TX AC(VHT80) Mode_Ant. 1
-----------	----------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
106	5530	13.52	0.00	13.52	23.98	0.2500	Complies
122	5610	15.12	0.00	15.12	23.98	0.2500	Complies

Test Mode	UNII-2C_TX AC(VHT80) Mode_Ant. 2
-----------	----------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
106	5530	14.91	0.00	14.91	23.98	0.2500	Complies
122	5610	16.18	0.00	16.18	23.98	0.2500	Complies

Test Mode	UNII-2C_TX AC(VHT80) Mode_Total
-----------	---------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
106	5530	17.28	23.98	0.2500	Complies
122	5610	18.69	23.98	0.2500	Complies

Test Mode	UNII-2C_TX AX(HE20) Mode_Ant. 1
-----------	---------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
100	5500	15.37	0.00	15.37	23.98	0.2500	Complies
116	5580	15.09	0.00	15.09	23.98	0.2500	Complies
140	5700	15.16	0.00	15.16	23.98	0.2500	Complies

Test Mode	UNII-2C_TX AX(HE20) Mode_Ant. 2
-----------	---------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
100	5500	15.89	0.00	15.89	23.98	0.2500	Complies
116	5580	15.81	0.00	15.81	23.98	0.2500	Complies
140	5700	15.79	0.00	15.79	23.98	0.2500	Complies

Test Mode	UNII-2C_TX AX(HE20) Mode_Total
-----------	--------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
100	5500	18.65	23.98	0.2500	Complies
116	5580	18.48	23.98	0.2500	Complies
140	5700	18.50	23.98	0.2500	Complies

Test Mode	UNII-2C_TX AX(HE40) Mode_Ant. 1
-----------	---------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
102	5510	15.03	0.00	15.03	23.98	0.2500	Complies
110	5550	15.10	0.00	15.10	23.98	0.2500	Complies
134	5670	15.20	0.00	15.20	23.98	0.2500	Complies

Test Mode	UNII-2C_TX AX(HE40) Mode_Ant. 2
-----------	---------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
102	5510	15.93	0.00	15.93	23.98	0.2500	Complies
110	5550	16.14	0.00	16.14	23.98	0.2500	Complies
134	5670	16.12	0.00	16.12	23.98	0.2500	Complies

Test Mode	UNII-2C_TX AX(HE40) Mode_Total
-----------	--------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
102	5510	18.51	23.98	0.2500	Complies
110	5550	18.66	23.98	0.2500	Complies
134	5670	18.69	23.98	0.2500	Complies

Test Mode	UNII-2C_TX AX(HE80) Mode_Ant. 1
-----------	---------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
106	5530	11.16	0.00	11.16	23.98	0.2500	Complies
122	5610	15.42	0.00	15.42	23.98	0.2500	Complies

Test Mode	UNII-2C_TX AX(HE80) Mode_Ant. 2
-----------	---------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
106	5530	11.75	0.00	11.75	23.98	0.2500	Complies
122	5610	16.56	0.00	16.56	23.98	0.2500	Complies

Test Mode	UNII-2C_TX AX(HE80) Mode_Total
-----------	--------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
106	5530	14.48	23.98	0.2500	Complies
122	5610	19.04	23.98	0.2500	Complies

Test Mode	UNII-3_TX A Mode_Ant. 1
-----------	-------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
149	5745	13.39	0.00	13.39	30.00	1.0000	Complies
157	5785	15.01	0.00	15.01	30.00	1.0000	Complies
165	5825	13.40	0.00	13.40	30.00	1.0000	Complies

Test Mode	UNII-3_TX A Mode_Ant. 2
-----------	-------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
149	5745	13.51	0.00	13.51	30.00	1.0000	Complies
157	5785	15.78	0.00	15.78	30.00	1.0000	Complies
165	5825	13.67	0.00	13.67	30.00	1.0000	Complies

Test Mode	UNII-3_TX A Mode_Total
-----------	------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
149	5745	16.46	30.00	1.0000	Complies
157	5785	18.42	30.00	1.0000	Complies
165	5825	16.55	30.00	1.0000	Complies

Test Mode	UNII-3_TX N(HT20) Mode_Ant. 1
-----------	-------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
149	5745	15.40	0.00	15.40	30.00	1.0000	Complies
157	5785	15.82	0.00	15.82	30.00	1.0000	Complies
165	5825	13.70	0.00	13.70	30.00	1.0000	Complies

Test Mode	UNII-3_TX N(HT20) Mode_Ant. 2
-----------	-------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
149	5745	15.94	0.00	15.94	30.00	1.0000	Complies
157	5785	16.02	0.00	16.02	30.00	1.0000	Complies
165	5825	14.04	0.00	14.04	30.00	1.0000	Complies

Test Mode	UNII-3_TX N(HT20) Mode_Total
-----------	------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
149	5745	18.69	30.00	1.0000	Complies
157	5785	18.93	30.00	1.0000	Complies
165	5825	16.88	30.00	1.0000	Complies

Test Mode	UNII-3_TX N(HT40) Mode_Ant. 1
-----------	-------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
151	5755	14.47	0.00	14.47	30.00	1.0000	Complies
159	5795	13.76	0.00	13.76	30.00	1.0000	Complies

Test Mode	UNII-3_TX N(HT40) Mode_Ant. 2
-----------	-------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
151	5755	14.53	0.00	14.53	30.00	1.0000	Complies
159	5795	14.19	0.00	14.19	30.00	1.0000	Complies

Test Mode	UNII-3_TX N(HT40) Mode_Total
-----------	------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
151	5755	17.51	30.00	1.0000	Complies
159	5795	16.99	30.00	1.0000	Complies

Test Mode	UNII-3_TX AC(VHT20) Mode_Ant. 1
-----------	---------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
149	5745	15.38	0.00	15.38	30.00	1.0000	Complies
157	5785	15.72	0.00	15.72	30.00	1.0000	Complies
165	5825	13.49	0.00	13.49	30.00	1.0000	Complies

Test Mode	UNII-3_TX AC(VHT20) Mode_Ant. 2
-----------	---------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
149	5745	15.93	0.00	15.93	30.00	1.0000	Complies
157	5785	15.99	0.00	15.99	30.00	1.0000	Complies
165	5825	14.01	0.00	14.01	30.00	1.0000	Complies

Test Mode	UNII-3_TX AC(VHT20) Mode_Total
-----------	--------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
149	5745	18.67	30.00	1.0000	Complies
157	5785	18.87	30.00	1.0000	Complies
165	5825	16.77	30.00	1.0000	Complies

Test Mode	UNII-3_TX AC(VHT40) Mode_Ant. 1
-----------	---------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
151	5755	14.42	0.00	14.42	30.00	1.0000	Complies
159	5795	13.75	0.00	13.75	30.00	1.0000	Complies

Test Mode	UNII-3_TX AC(VHT40) Mode_Ant. 2
-----------	---------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
151	5755	14.48	0.00	14.48	30.00	1.0000	Complies
159	5795	14.13	0.00	14.13	30.00	1.0000	Complies

Test Mode	UNII-3_TX AC(VHT40) Mode_Total
-----------	--------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
151	5755	17.46	30.00	1.0000	Complies
159	5795	16.95	30.00	1.0000	Complies

Test Mode	UNII-3_TX AC(VHT80) Mode_Ant. 1
-----------	---------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
155	5775	13.65	0.00	13.65	30.00	1.0000	Complies

Test Mode	UNII-3_TX AC(VHT80) Mode_Ant. 2
-----------	---------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
155	5775	14.26	0.00	14.26	30.00	1.0000	Complies

Test Mode	UNII-3_TX AC(VHT80) Mode_Total
-----------	--------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
155	5775	16.98	30.00	1.0000	Complies

Test Mode	UNII-3_TX AX(HE20) Mode_Ant. 1
-----------	--------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
149	5745	14.46	0.00	14.46	30.00	1.0000	Complies
157	5785	15.61	0.00	15.61	30.00	1.0000	Complies
165	5825	13.04	0.00	13.04	30.00	1.0000	Complies

Test Mode	UNII-3_TX AX(HE20) Mode_Ant. 2
-----------	--------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
149	5745	15.08	0.00	15.08	30.00	1.0000	Complies
157	5785	15.80	0.00	15.80	30.00	1.0000	Complies
165	5825	13.42	0.00	13.42	30.00	1.0000	Complies

Test Mode	UNII-3_TX AX(HE20) Mode_Total
-----------	-------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
149	5745	17.79	30.00	1.0000	Complies
157	5785	18.72	30.00	1.0000	Complies
165	5825	16.24	30.00	1.0000	Complies

Test Mode	UNII-3_TX AX(HE40) Mode_Ant. 1
-----------	--------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
151	5755	13.32	0.00	13.32	30.00	1.0000	Complies
159	5795	12.02	0.00	12.02	30.00	1.0000	Complies

Test Mode	UNII-3_TX AX(HE40) Mode_Ant. 2
-----------	--------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
151	5755	13.99	0.00	13.99	30.00	1.0000	Complies
159	5795	13.65	0.00	13.65	30.00	1.0000	Complies

Test Mode	UNII-3_TX AX(HE40) Mode_Total
-----------	-------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
151	5755	16.68	30.00	1.0000	Complies
159	5795	15.92	30.00	1.0000	Complies

Test Mode	UNII-3_TX AX(HE80) Mode_Ant. 1
-----------	--------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
155	5775	13.16	0.00	13.16	30.00	1.0000	Complies

Test Mode	UNII-3_TX AX(HE80) Mode_Ant. 2
-----------	--------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
155	5775	13.50	0.00	13.50	30.00	1.0000	Complies


Test Mode	UNII-3_TX AX(HE80) Mode_Total
-----------	-------------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
155	5775	16.34	30.00	1.0000	Complies

APPENDIX G - POWER SPECTRAL DENSITY


Test Mode	UNII-1_TX A Mode_Ant. 1
-----------	-------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180	0.91	0.00	0.91	11.00	Complies
40	5200	0.99	0.00	0.99	11.00	Complies
48	5240	0.57	0.00	0.57	11.00	Complies

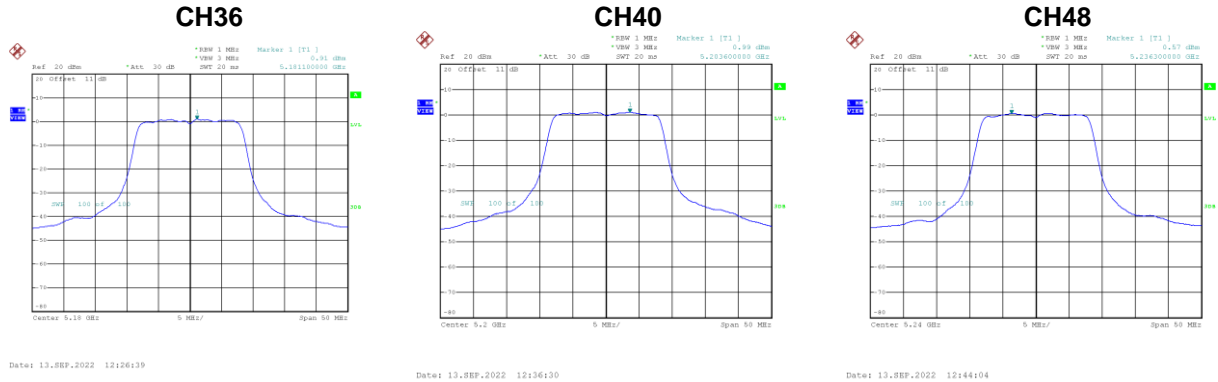

Test Mode	UNII-1_TX A Mode_Ant. 2
-----------	-------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180	0.81	0.00	0.81	11.00	Complies
40	5200	0.89	0.00	0.89	11.00	Complies
48	5240	0.39	0.00	0.39	11.00	Complies

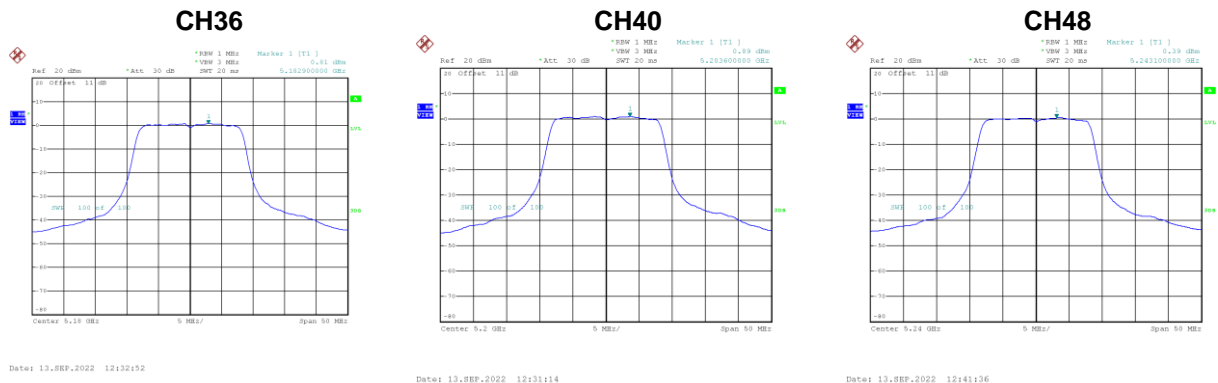


Test Mode	UNII-1_TX A Mode_Total
-----------	------------------------


Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180	3.87	11.00	Complies
40	5200	3.95	11.00	Complies
48	5240	3.49	11.00	Complies

Test Mode	UNII-1_TX N(HT20) Mode_Ant. 1
-----------	-------------------------------


Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180	1.61	0.00	1.61	11.00	Complies
40	5200	1.52	0.00	1.52	11.00	Complies
48	5240	0.77	0.00	0.77	11.00	Complies

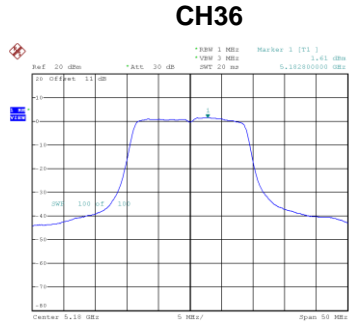

Date: 13_SEP_2022 13:23:15

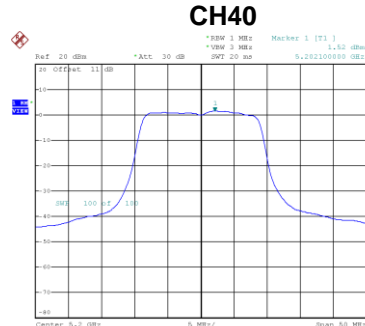


Date: 13_SEP_2022 13:25:13

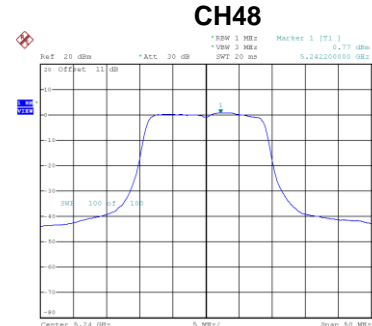


Date: 13_SEP_2022 14:27:23

Test Mode	UNII-1_TX N(HT20) Mode_Ant. 2
-----------	-------------------------------


Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180	1.25	0.00	1.25	11.00	Complies
40	5200	1.32	0.00	1.32	11.00	Complies
48	5240	0.19	0.00	0.19	11.00	Complies

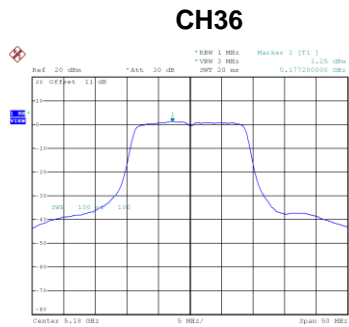

Date: 13_SEP_2022 13:20:49

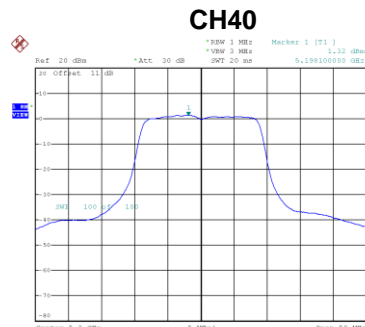

Date: 13_SEP_2022 13:27:13

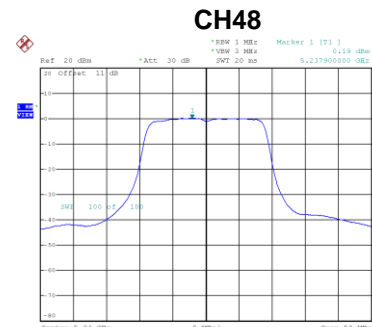

Date: 13_SEP_2022 14:28:42


Test Mode	UNII-1_TX N(HT20) Mode_Total
-----------	------------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180	4.44	11.00	Complies
40	5200	4.43	11.00	Complies
48	5240	3.50	11.00	Complies

Test Mode	UNII-1_TX N(HT40) Mode_Ant. 1
-----------	-------------------------------


Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
38	5190	-3.36	0.00	-3.36	11.00	Complies
46	5230	-3.02	0.00	-3.02	11.00	Complies

CH38

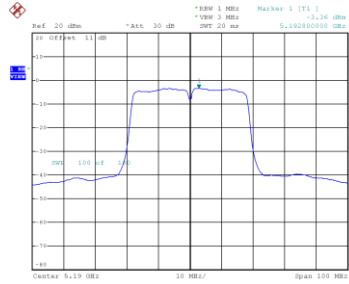

Date: 13_SEP_2022 16:19:55

CH46

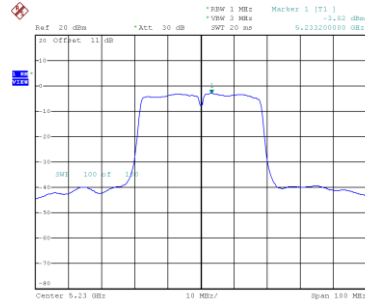


Date: 13_SEP_2022 16:21:43

Test Mode	UNII-1_TX N(HT40) Mode_Ant. 2
-----------	-------------------------------


Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
38	5190	-3.35	0.00	-3.35	11.00	Complies
46	5230	-2.93	0.00	-2.93	11.00	Complies

CH38

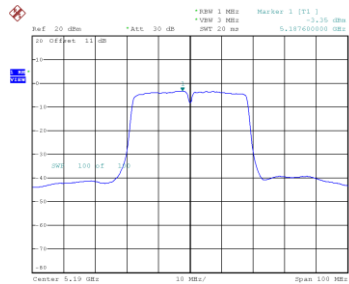

Date: 13_SEP_2022 16:17:45

CH46

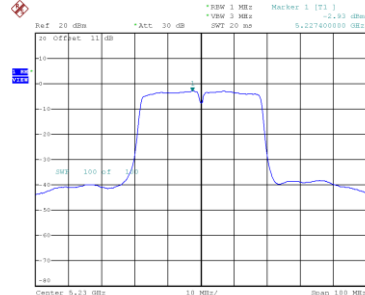


Date: 13_SEP_2022 16:22:18

Test Mode	UNII-1_TX N(HT40) Mode_Total
-----------	------------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
38	5190	-0.34	11.00	Complies
46	5230	0.04	11.00	Complies


Test Mode	UNII-1_TX AC(VHT80) Mode_Ant. 1
-----------	---------------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
42	5210	-4.01	0.00	-4.01	11.00	Complies

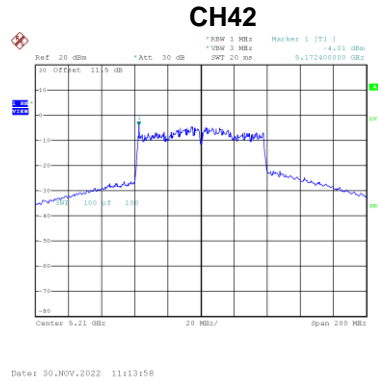

Test Mode	UNII-1_TX AC(VHT80) Mode_Ant. 2
-----------	---------------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
42	5210	-3.94	0.00	-3.94	11.00	Complies

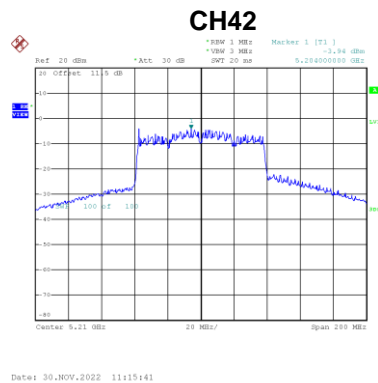


Test Mode	UNII-1_TX AC(VHT80) Mode_Total
-----------	--------------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
42	5210	-0.96	11.00	Complies


Test Mode	UNII-1_TX AX(HE20) Mode_Ant. 1
-----------	--------------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180	0.04	0.00	0.04	11.00	Complies
40	5200	-0.46	0.00	-0.46	11.00	Complies
48	5240	-0.53	0.00	-0.53	11.00	Complies

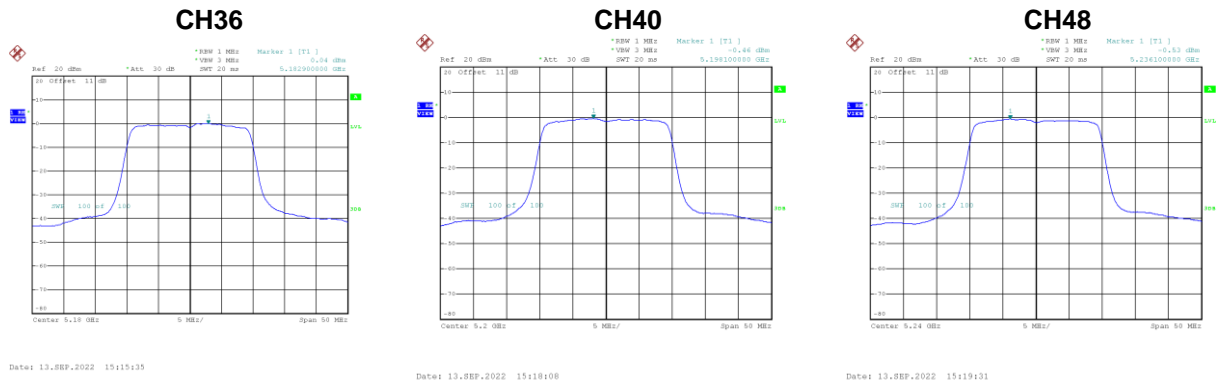

Test Mode	UNII-1_TX AX(HE20) Mode_Ant. 2
-----------	--------------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180	-0.16	0.00	-0.16	11.00	Complies
40	5200	-0.47	0.00	-0.47	11.00	Complies
48	5240	-0.33	0.00	-0.33	11.00	Complies

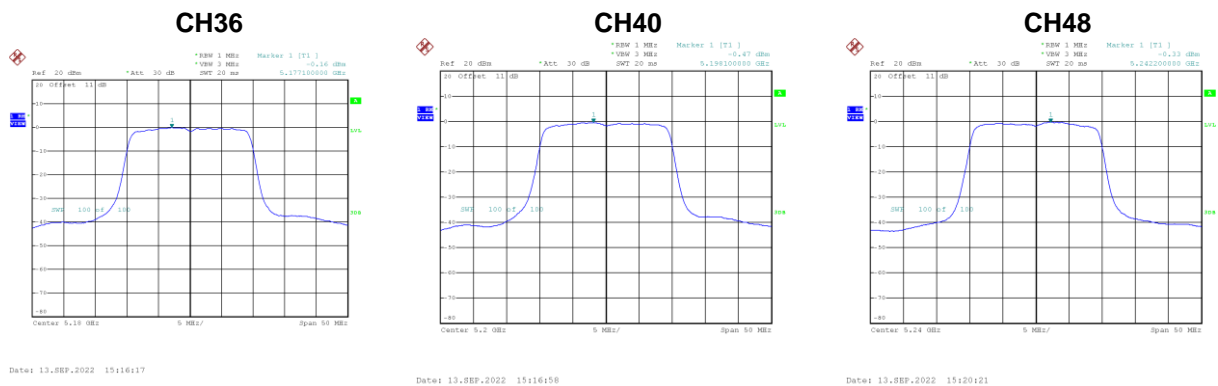


Test Mode	UNII-1_TX AX(HE20) Mode_Total
-----------	-------------------------------


Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180	2.95	11.00	Complies
40	5200	2.55	11.00	Complies
48	5240	2.58	11.00	Complies

Test Mode	UNII-1_TX AX(HE40) Mode_Ant. 1
-----------	--------------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
38	5190	-3.30	0.00	-3.30	11.00	Complies
46	5230	-3.41	0.00	-3.41	11.00	Complies

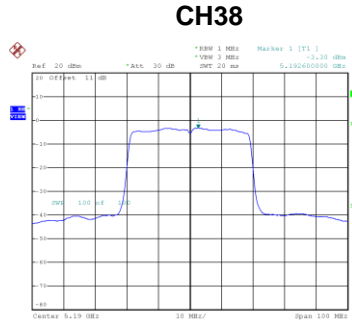


Date: 13_SEP_2022 16:15:00

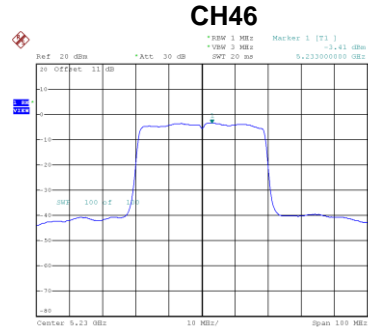


Date: 13_SEP_2022 16:15:10

Test Mode	UNII-1_TX AX(HE40) Mode_Ant. 2
-----------	--------------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
38	5190	-3.43	0.00	-3.43	11.00	Complies
46	5230	-3.18	0.00	-3.18	11.00	Complies

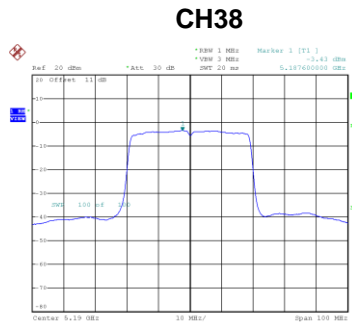

Date: 13_SEP_2022 16:15:11

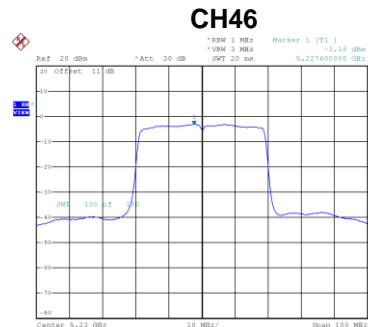


Date: 13_SEP_2022 16:15:14

Test Mode	UNII-1_TX AX(HE40) Mode_Total
-----------	-------------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
38	5190	-0.35	11.00	Complies
46	5230	-0.28	11.00	Complies


Test Mode	UNII-1_TX AX(HE80) Mode_Ant. 1
-----------	--------------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
42	5210	-7.37	0.00	-7.37	11.00	Complies

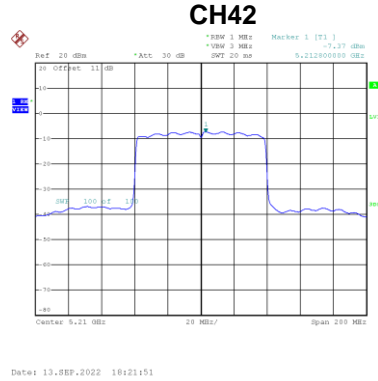

Test Mode	UNII-1_TX AX(HE80) Mode_Ant. 2
-----------	--------------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
42	5210	-4.09	0.00	-4.09	11.00	Complies

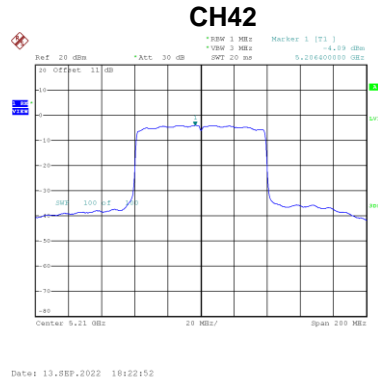


Test Mode	UNII-1_TX AX(HE80) Mode_Total
-----------	-------------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
42	5210	-2.42	11.00	Complies


Test Mode	UNII-2A_TX A Mode_Ant. 1
-----------	--------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
52	5260	0.81	0.00	0.81	11.00	Complies
60	5300	1.97	0.00	1.97	11.00	Complies
64	5320	1.94	0.00	1.94	11.00	Complies

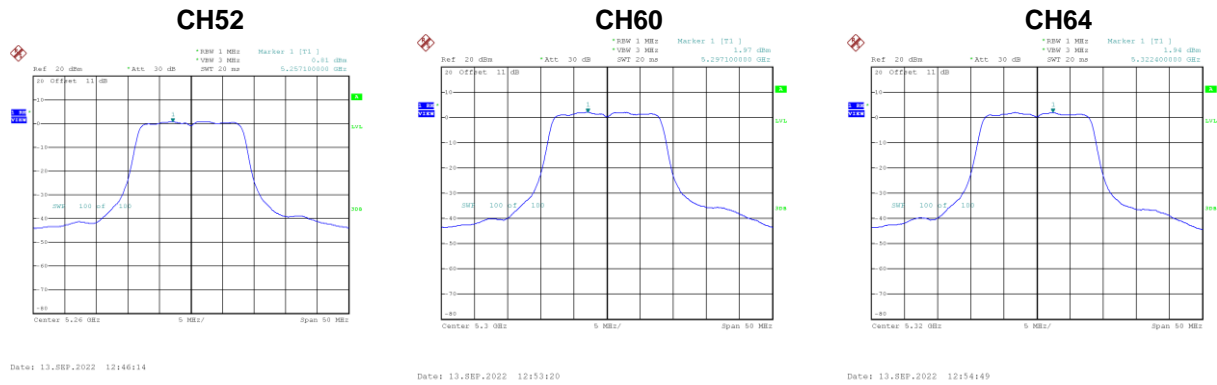

Test Mode	UNII-2A_TX A Mode_Ant. 2
-----------	--------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
52	5260	0.77	0.00	0.77	11.00	Complies
60	5300	1.82	0.00	1.82	11.00	Complies
64	5320	2.00	0.00	2.00	11.00	Complies

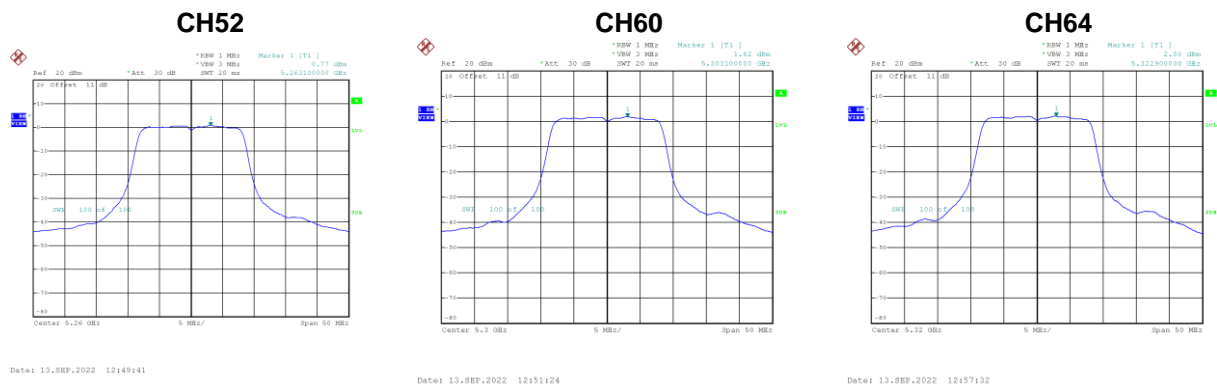


Test Mode	UNII-2A_TX A Mode_Total
-----------	-------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
52	5260	3.80	11.00	Complies
60	5300	4.91	11.00	Complies
64	5320	4.98	11.00	Complies


Test Mode	UNII-2A_TX N(HT20) Mode_Ant. 1
-----------	--------------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
52	5260	0.69	0.00	0.69	11.00	Complies
60	5300	1.54	0.00	1.54	11.00	Complies
64	5320	0.71	0.00	0.71	11.00	Complies

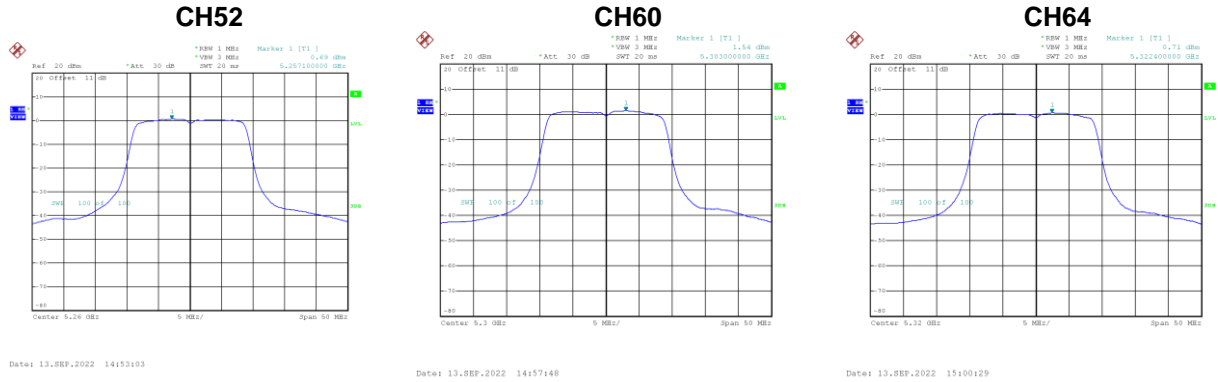

Test Mode	UNII-2A_TX N(HT20) Mode_Ant. 2
-----------	--------------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
52	5260	0.59	0.00	0.59	11.00	Complies
60	5300	1.49	0.00	1.49	11.00	Complies
64	5320	0.97	0.00	0.97	11.00	Complies

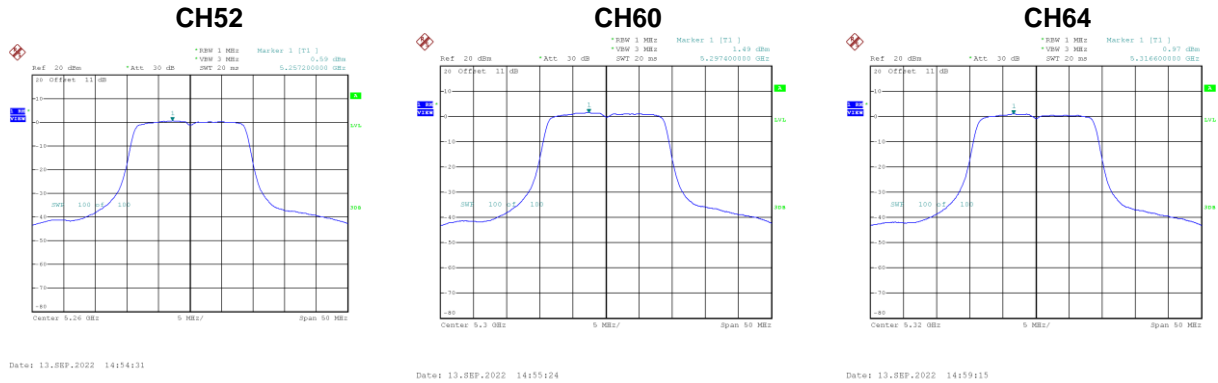


Test Mode	UNII-2A_TX N(HT20) Mode_Total
-----------	-------------------------------


Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
52	5260	3.65	11.00	Complies
60	5300	4.53	11.00	Complies
64	5320	3.85	11.00	Complies

Test Mode	UNII-2A_TX N(HT40) Mode_Ant. 1
-----------	--------------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
54	5270	-3.16	0.00	-3.16	11.00	Complies
62	5310	-2.74	0.00	-2.74	11.00	Complies

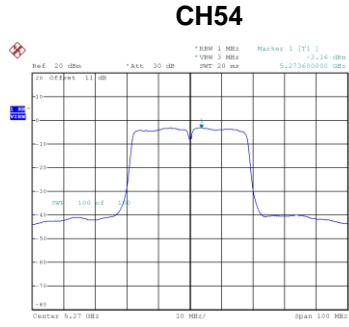


Date: 13-SEP-2022 16:25:23

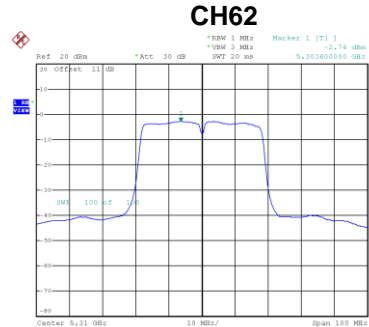


Date: 13-SEP-2022 16:26:58

Test Mode	UNII-2A_TX N(HT40) Mode_Ant. 2
-----------	--------------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
54	5270	-3.22	0.00	-3.22	11.00	Complies
62	5310	-2.56	0.00	-2.56	11.00	Complies

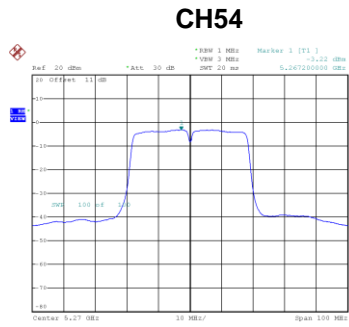

Date: 13-SEP-2022 16:23:29

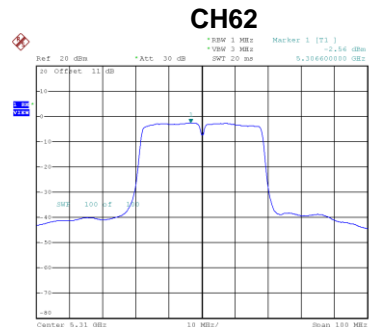


Date: 13-SEP-2022 16:27:46

Test Mode	UNII-2A_TX N(HT40) Mode_Total
-----------	-------------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
54	5270	-0.18	11.00	Complies
62	5310	0.36	11.00	Complies


Test Mode	UNII-2A_TX AC(VHT80) Mode_Ant. 1
-----------	----------------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
58	5290	-3.15	0.00	-3.15	11.00	Complies

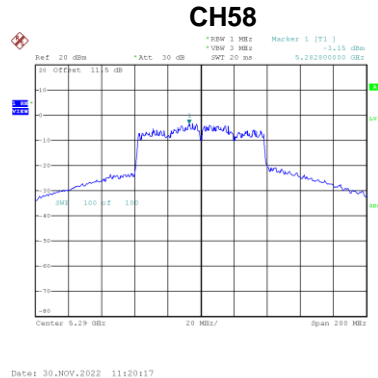

Test Mode	UNII-2A_TX AC(VHT80) Mode_Ant. 2
-----------	----------------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
58	5290	-3.33	0.00	-3.33	11.00	Complies

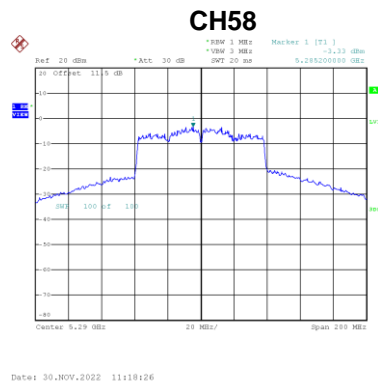


Test Mode	UNII-2A_TX AC(VHT80) Mode_Total
-----------	---------------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
58	5290	-0.23	11.00	Complies


Test Mode	UNII-2A_TX AX(HE20) Mode_Ant. 1
-----------	---------------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
52	5260	-0.27	0.00	-0.27	11.00	Complies
60	5300	0.02	0.00	0.02	11.00	Complies
64	5320	0.49	0.00	0.49	11.00	Complies

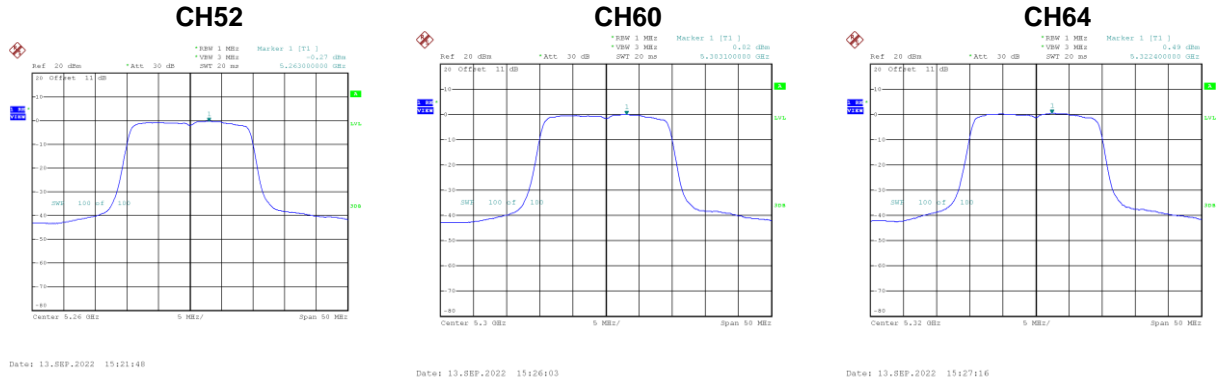

Test Mode	UNII-2A_TX AX(HE20) Mode_Ant. 2
-----------	---------------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
52	5260	-0.69	0.00	-0.69	11.00	Complies
60	5300	-0.19	0.00	-0.19	11.00	Complies
64	5320	0.73	0.00	0.73	11.00	Complies

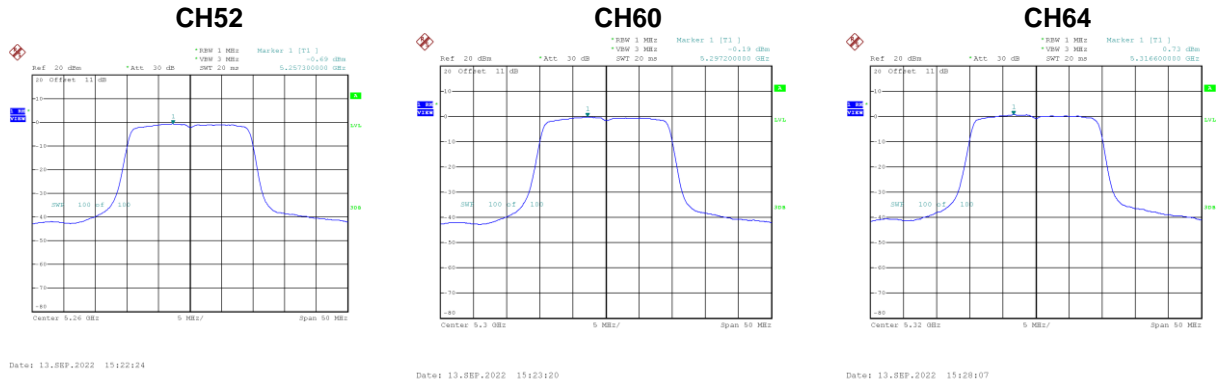


Test Mode	UNII-2A_TX AX(HE20) Mode_Total
-----------	--------------------------------


Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
52	5260	2.54	11.00	Complies
60	5300	2.93	11.00	Complies
64	5320	3.62	11.00	Complies

Test Mode	UNII-2A_TX AX(HE40) Mode_Ant. 1
-----------	---------------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
54	5270	-3.16	0.00	-3.16	11.00	Complies
62	5310	-2.95	0.00	-2.95	11.00	Complies

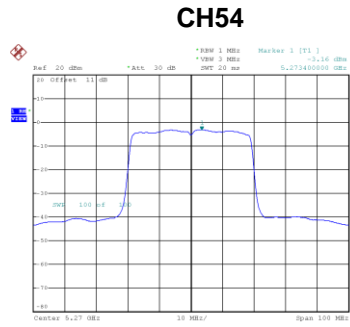


Date: 13-SEP-2022 17:10:41

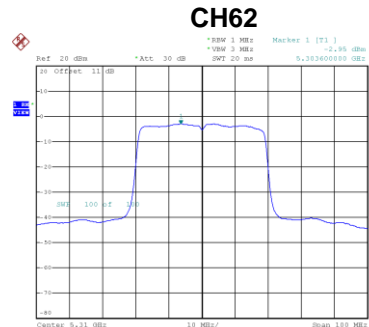


Date: 13-SEP-2022 17:11:10

Test Mode	UNII-2A_TX AX(HE40) Mode_Ant. 2
-----------	---------------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
54	5270	-3.40	0.00	-3.40	11.00	Complies
62	5310	-2.66	0.00	-2.66	11.00	Complies

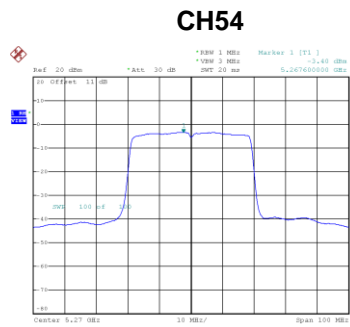

Date: 13-SEP-2022 17:10:19

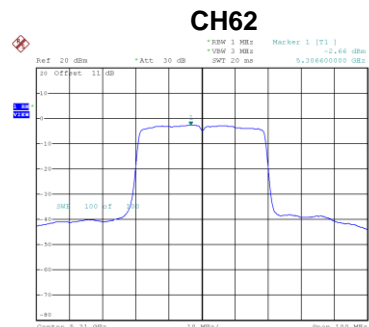

Date: 13-SEP-2022 17:10:18

Test Mode	UNII-2A_TX AX(HE40) Mode_Total
-----------	--------------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
54	5270	-0.27	11.00	Complies
62	5310	0.21	11.00	Complies