

Regulatory WLAN Antenna Information (Template)

English Language Required for Intel Regulatory Review / Approval

(OEM/ODM or antenna vendor is required to complete this document with platform antenna information.

Remove Intel references and make this your own document)

Platform information											
Brand	ODM	****End product model name	Intel platform <small>(ex: Yes, No or NA)</small>	Platform type <small>(ex: regular NB, convertible PC, AIO...etc)</small>	*SAR minimum separation (mm)						
Valve	Quanta	1030	NA		2.23						
<p>****Please fill in exact product model name and make sure the model name is visible on product cover or any parts for end users recognize for authority inspection.</p>											
Antenna information											
Vendor		Type	Antenna Part number <small>(Main)</small>	Antenna Part number <small>(Aux)</small>	Antenna Part number <small>(BT)</small>						
High-Tek Electronics Co., Ltd		PIFA	DQ60ACQD0F0 <small>(0ACQD023003N)</small>	DQ60ACQD0F1 <small>(0ACQD023004N)</small>	DQ60ACQD0E7 <small>(0ACQD022061N)</small>						
Peak gain w/ cable loss (dBi)*											
	2.4GHz <small>2400-2483.5 MHz</small>	5.2GHz <small>5150-5250MHz</small>	5.3GHz <small>5250-5350MHz</small>	5.6GHz <small>5470-5725MHz</small>	5.8GHz <small>5725-5850MHz</small>	6.2GHz <small>5925-6425MHz</small>	6.5GHz <small>6425-6525MHz</small>	6.7GHz <small>6525-6875MHz</small>	7.0 GHz <small>6875-7125MHz</small>		
Main	0.27	0.69	0.69	0.10	0.56	2.68	2.68	2.85	2.81		
Aux	0.34	2.72	2.00	1.54	1.29	2.92	2.83	2.91	2.99		
BT	1.06	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A		
Intel Reference Gain/Type/ Separation distance											
Antenna Type	Antenna Peak gain (In dBi)*									Distance to the end user (mm)	
	2.4GHz <small>2400-2483.5 MHz</small>	5.2GHz <small>5150-5250MHz</small>	5.3GHz <small>5250-5350MHz</small>	5.6GHz <small>5470-5725MHz</small>	5.8GHz <small>5725-5850MHz</small>	6.2GHz <small>5925-6425MHz</small>	6.5GHz <small>6425-6525MHz</small>	6.7GHz <small>6525-6875MHz</small>	7.0GHz <small>6875-7125MHz</small>		
	Design	3.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00		Generic: refer to modular FCC SAR report Mid-power: ≥ 8 mm Low power: ≥ 5 mm
	PIFA	3.24	3.64	3.73	4.77	4.97	4.83	4.30	5.37		
Dipole	2.89	2.92	3.19	4.41	4.22	4.83	4.30	4.49	5.34		
Notes (marked with *)											
<p>* SAR minimum separation (mm)</p> <ul style="list-style-type: none"> - Regular NB: Minimum antenna-to-body (from antenna bottom to the bottom of the device) - Tablet / Convertible PC: Minimum antenna-to-edge (5 sides of the device) - Mini-tablet: Minimum antenna-to-edge (6 sides of the device) <p>* 3D Peak Antenna gain should be equal or greater than -2 dBi</p> <ul style="list-style-type: none"> - If a host integrator plans to use a lower gain antenna of the same type, additional CBP(FCC)/EDT(EU) testing need to be performed while the module is installed in the host. 											

Table of contents

1. Applicable test method
2. Test & System Description
 - a. Test setup
 - b. Equipment list
3. Setup photo

[Section 1. Antenna Assembly Specifications](#)

[Section 2. Dimensioned Photos or Drawings of Antennas](#)

[Section 3. Radiation characteristics of antenna loaded in Host Platform](#)

[Section 4. Antenna Host Platform Location Information](#)

[Section 5. Antenna dimensional information for SAR evaluation](#)

[Section 6. Diagram Example of Co-Location Antenna Separation](#)


High-Tek Electronics Co., Ltd.

17F., NO. 100,Sec.1,Xintai 5th Rd.,Xizhi Dist.,

New Taipei City 22102 TAIWAN

1. Applicable test methods

The radiation pattern of antenna is measured in both horizontal polarization and vertical polarization. The radiation pattern measurements are performed in the three-dimensional anechoic chamber. The chamber provides less than – 30dB reflectivity from 800MHz through 8GHz. The chamber is calibrated using both standard dipole antenna and horn antenna. The Gain here is expressed as dBi that standardizes the isotropic antenna. The Gain measurements and antenna radiation pattern are also performed in the same chamber described previously. Figure 2 shows the schematic diagram for measuring radiation pattern and Gain.

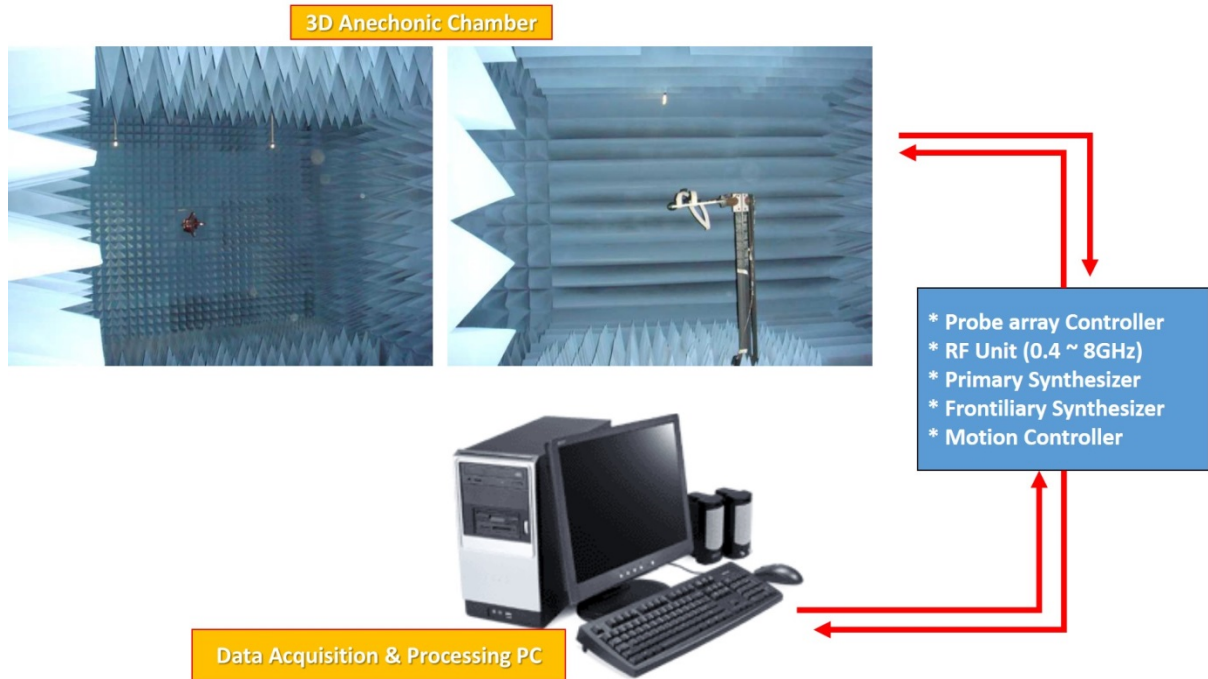

2. Test & System Description

a. Test setup

1. Frequency Range

2400~2500MHz, for WLAN application.

5150~5850MHz, for WLAN application

2. Antenna Configuration

The antenna basically has two parts; the stamping and the cable assembly with the connector on one side. The detailed drawing is attached.

3. VSWR

The VSWR is measured with network analyzer that support up to 8GHz. All the measurements are performed with the customer provided fixture. Figure 1 shows the typical schematic diagram for measuring VSWR.

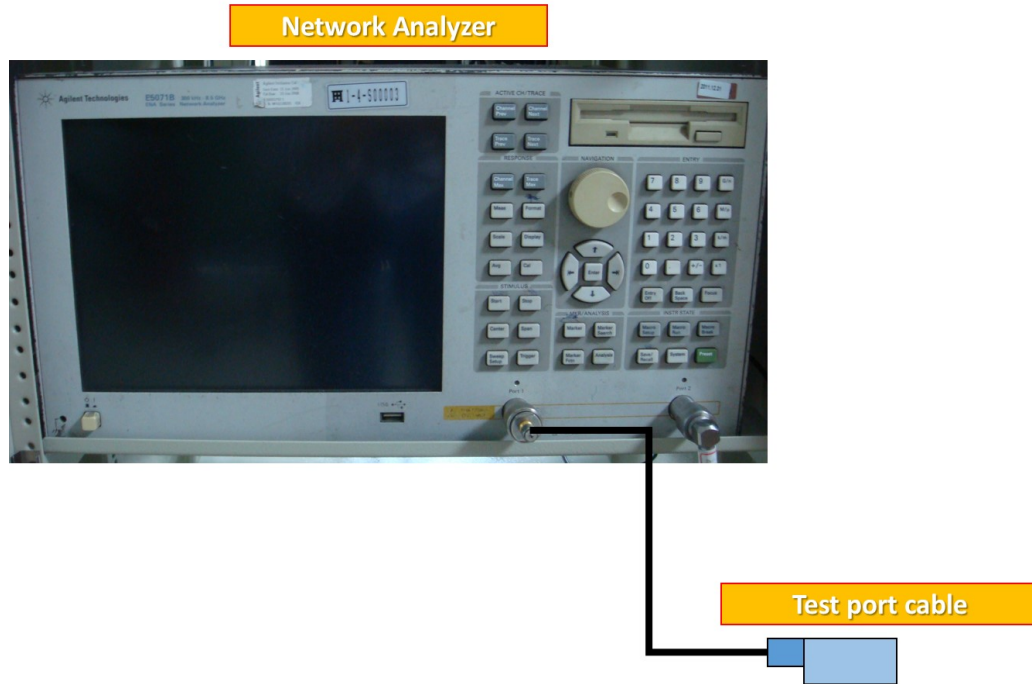


Figure 1. The schematic diagram for measuring VSWR

b. Equipment list

Test Equipment

The equipment for the antenna measurement we used is as follows:

- A. Network Analyzer, support up to 8GHz, to measure the VSWR and input impedance of antenna.
- B. Three-dimensional anechoic chamber to measure antenna gain and radiation pattern(Standard horn antenna was used to calibrate the chamber)
- C. Digital caliper to measure the dimensions.
- D. Climatic chamber for mechanical tests.

Radiated Setup

item	Device	Type/Model	manufacturer	Cal. Date	Cal. Due Date
1	Anechoic Chamber	AMS-8500	ETS-Lindgren	2021/12/20	2022/12/20
2	Turn Table	ETS	ETS-Lindgren	N/A	N/A
3	Measurement SW	EMQuest1.08	ETS-Lindgren	N/A	N/A
4	Vector Network Analyzer	Agilent E5071B	Agilent	2021/12/17	2022/12/17
5	Receive Antenna Absorber Nested Dual- Polarized Dual-Vivaldi Array Antenna 700MHz to 6GHz	EMCO 3164-08	ETS-Lindgren	N/A	N/A
6	Multi Axis Positioning System (MAPS™)	EMCO 2115CR	ETS-Lindgren	N/A	N/A

7	MAPS™ Controller	MECO 2090	ETS-Lindgren	N/A	N/A
8	Horn antenna	3164-08	ETS-Lindgren	2021/12/15	2022/12/15
9	Cable 0.5m - 700MHz~10GHz	RG316	Senyu	2021/12/21	2022/12/21

N/A : Not Applicable

Antenna Information

Section 1. Antenna Assembly Specifications

1A Antenna Part Number	1B Manufacturer	1C Antenna Type	1D Cable Assembly Part Number and Information	Freq Range MHz	1E * Peak Gain W/ Cable loss (dBi)	1F Peak Gain w/o Cable Loss (dBi)	1G Max VSWR	1H Cable Loss (dB)
(P/N:DQ60ACQD0F0 (0ACQD023003N)) Main Antenna	High-Tek Electronics Co., Ltd	PIFA	Connector: Caimei 958-C208-CM-W-HU-A0 50 Ohm Coaxial Cable Length: 86 mm Diameter: 0.81 mm	2400-2483.5	0.27	0.62	3.00	0.35
				5150-5250	0.69	1.15	3.00	0.46
				5250-5350	0.69	1.15	3.00	0.46
				5470-5725	0.10	0.61	3.00	0.51
				5725-5850	0.56	1.07	3.00	0.51
				5925-6425	2.68	3.22	3.00	0.54
				6425-6525	2.68	3.23	3.00	0.55
				6525-6875	2.85	3.42	3.00	0.57
6875-7125	2.81	3.40	3.00	0.59				
(P/N:DQ60ACQD0F1 (0ACQD023004N)) Aux Antenna	High-Tek Electronics Co., Ltd	PIFA	Connector: Caimei 958-C208-CM-W-HU-A0 50 Ohm Coaxial Cable Length: 20 mm Diameter: 0.81 mm	2400-2483.5	0.34	0.42	3.00	0.08
				5150-5250	2.72	2.83	3.00	0.11
				5250-5350	2.00	2.11	3.00	0.11
				5470-5725	1.54	1.66	3.00	0.12
				5725-5850	1.29	1.41	3.00	0.12
				5925-6425	2.92	3.05	3.00	0.13
				6425-6525	2.83	2.96	3.00	0.13
				6525-6875	2.91	3.04	3.00	0.13
6875-7125	2.99	3.13	3.00	0.14				
(P/N:DQ60ACQD0E7 (0ACQD022061N)) BT Antenna	High-Tek Electronics Co., Ltd	PIFA	Connector: Caimei 958-C113-CM-B-BU-A0 50 Ohm Coaxial Cable Length: 150 mm Diameter: 1.13 mm	2400-2483.5	1.06	1.51	3.00	0.45


- 3D Antenna Peak Gain required being test in system basis.

Section 3. Radiation characteristics of antenna loaded in Host Platform

Main Antenna


Max Antenna 3D Radiation Pattern 2400 – 2483.5 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
2400-2483.5	0.27

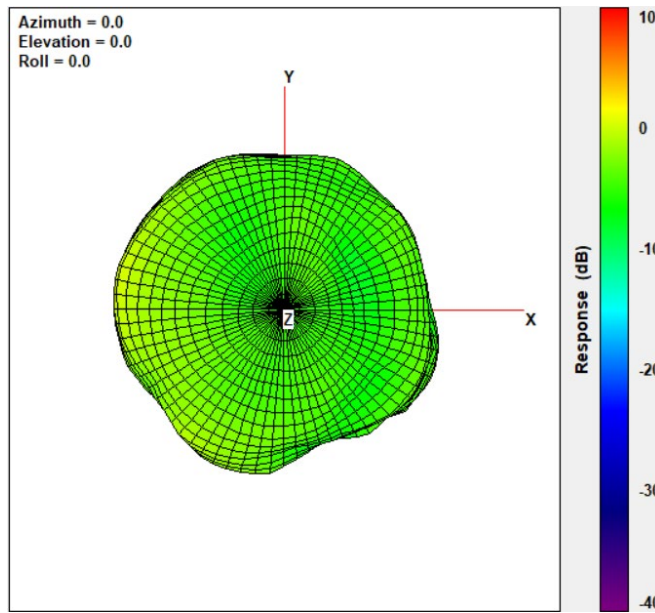


Max Antenna 3D Radiation Pattern 5150-5250 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5150-5250	0.69

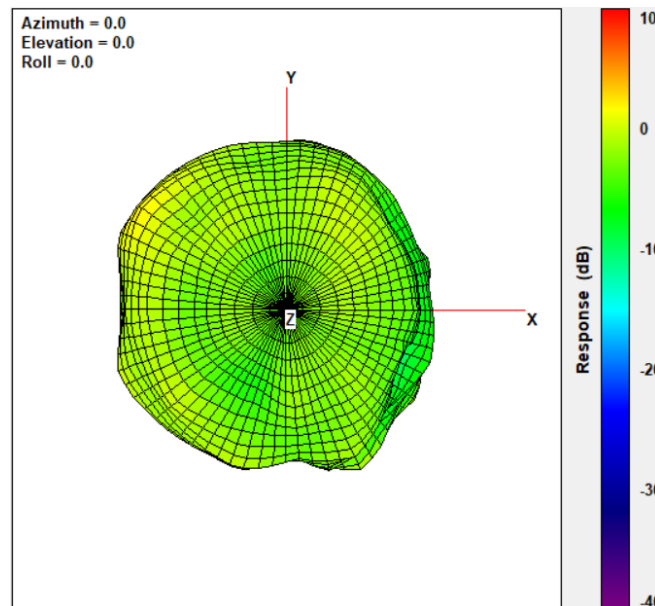


Max Antenna 3D Radiation Pattern 5250-5350 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5250-5350	0.69

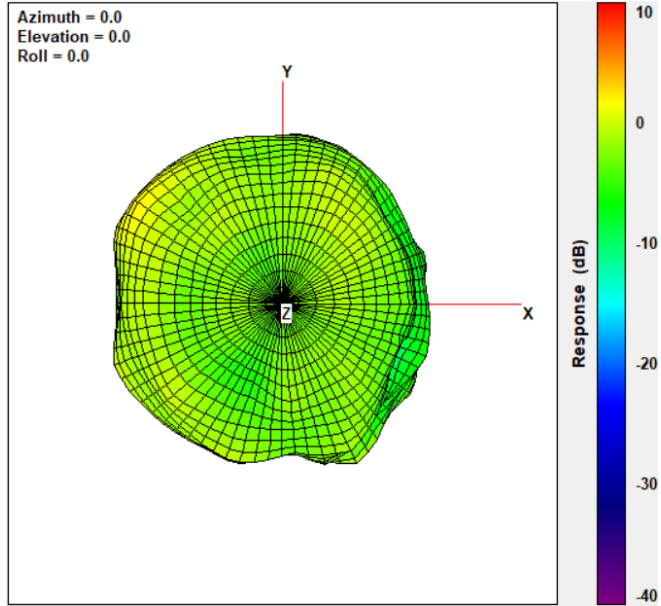


Max Antenna 3D Radiation Pattern 5470-5725 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5470-5725	0.10

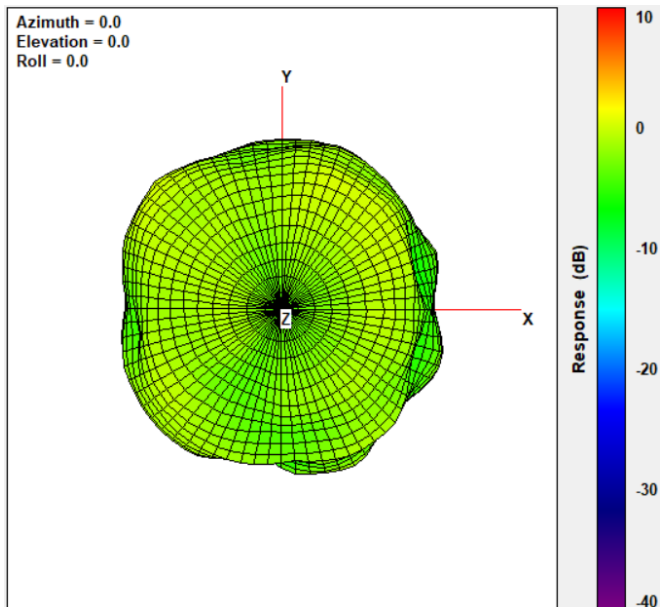


Max Antenna 3D Radiation Pattern 5725-5850 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5725-5850	0.56

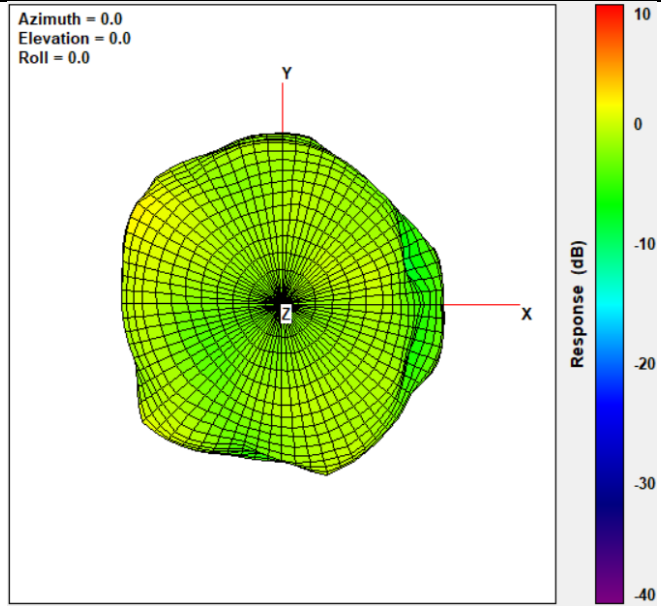


Max Antenna 3D Radiation Pattern 5925-6425 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5925-6425	2.68

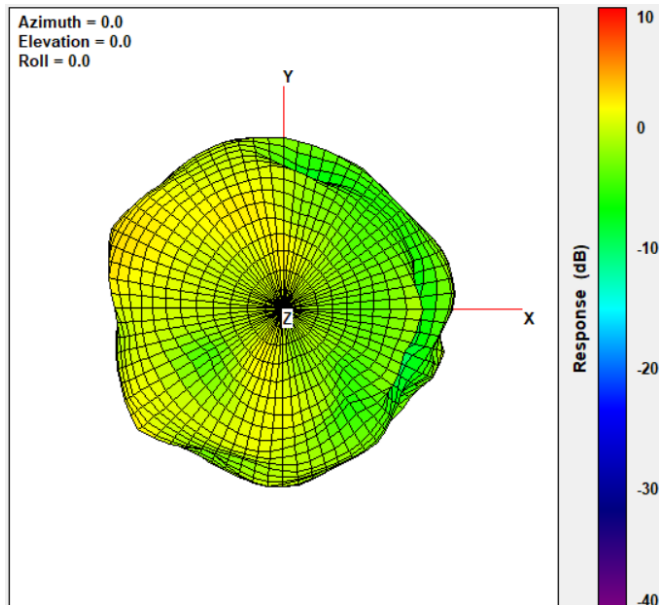


Max Antenna 3D Radiation Pattern 6425-6525 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6425-6525	2.68

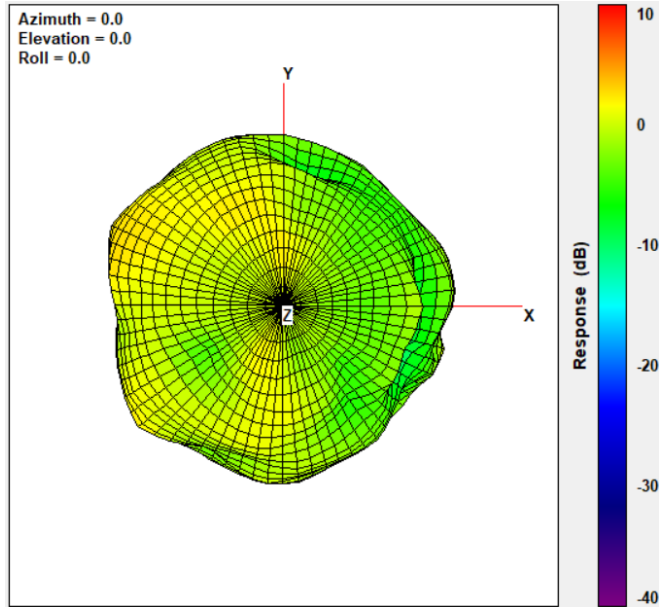


Max Antenna 3D Radiation Pattern 6525-6875 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6525-6875	2.85

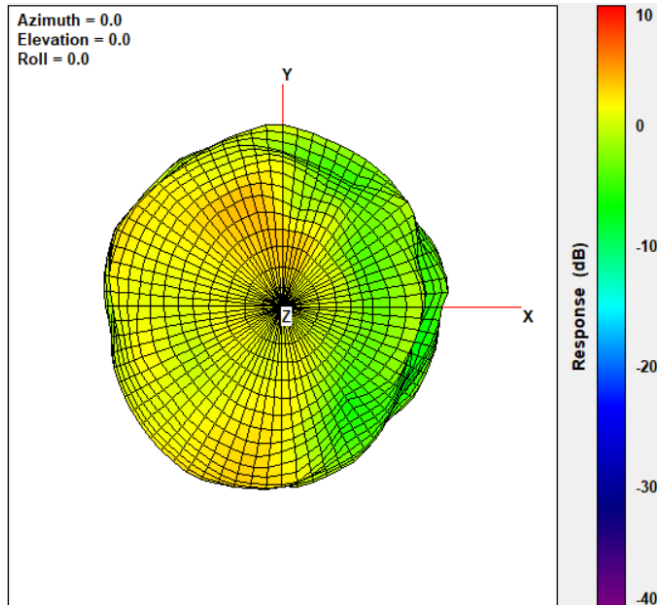

Max Antenna 3D Radiation Pattern 6875-7125 MHz


Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6875-7125	2.81

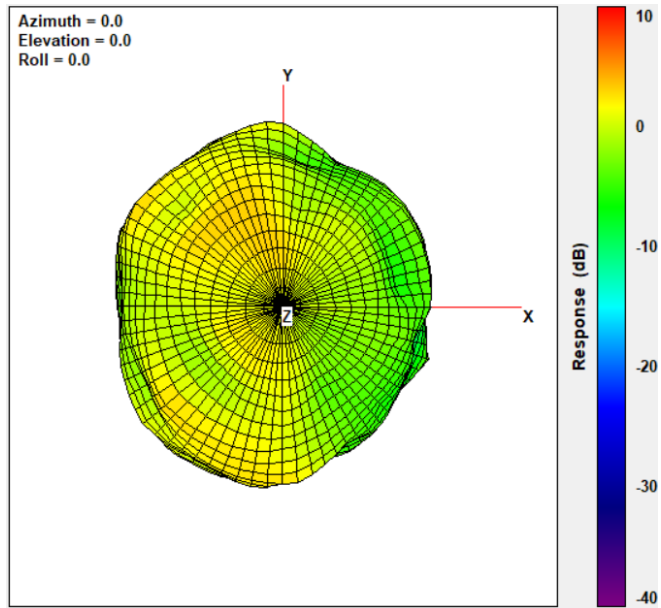

Auxiliary Antenna


Max Antenna 3D Radiation Pattern 2400 – 2483.5 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
2400-2483.5	0.34

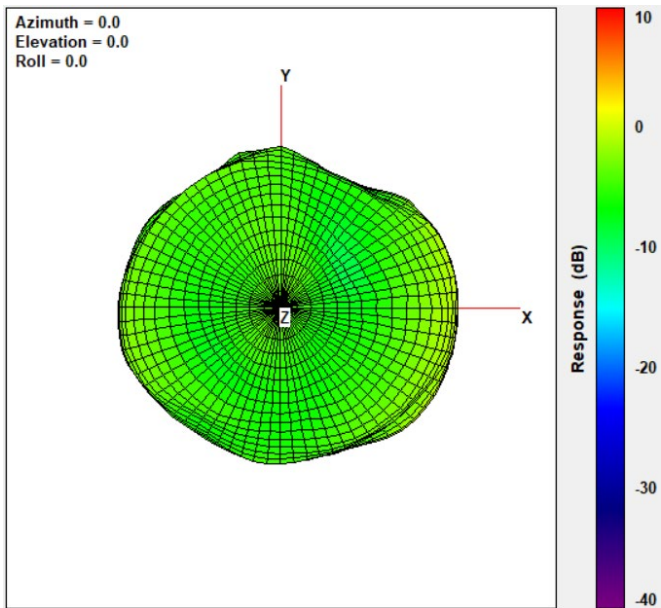


Max Antenna 3D Radiation Pattern 5150-5250 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5150-5250	2.72

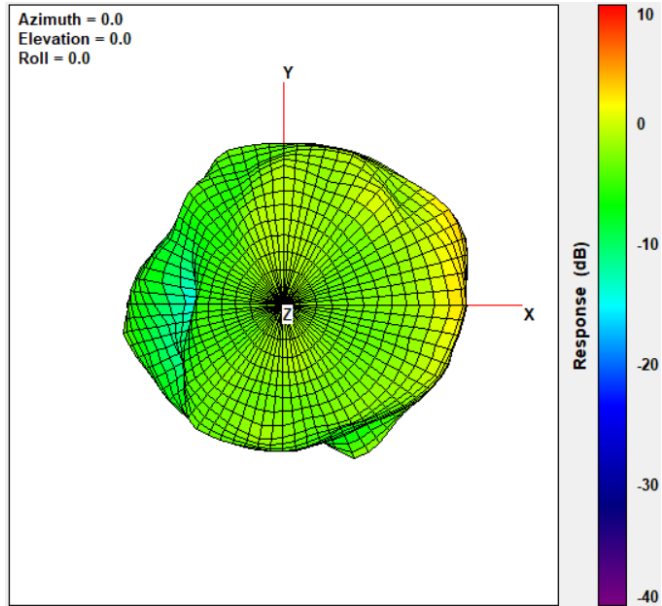


Max Antenna 3D Radiation Pattern 5250-5350 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5250-5350	2.00

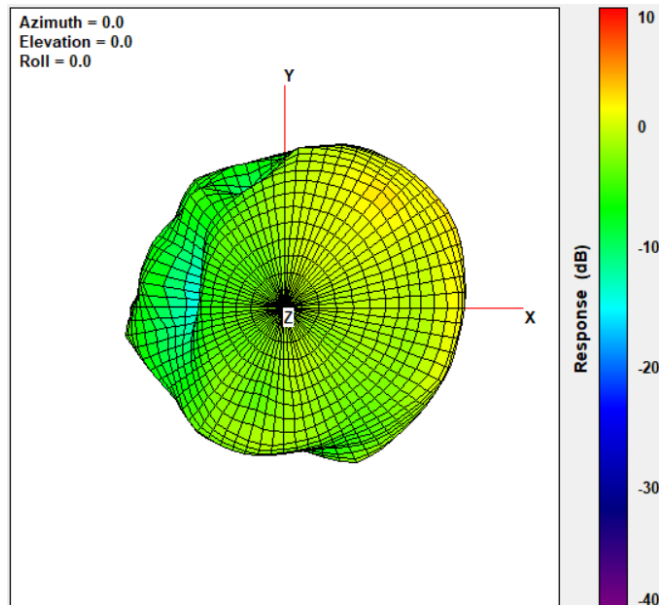


Max Antenna 3D Radiation Pattern 5470-5725 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5470-5725	1.54

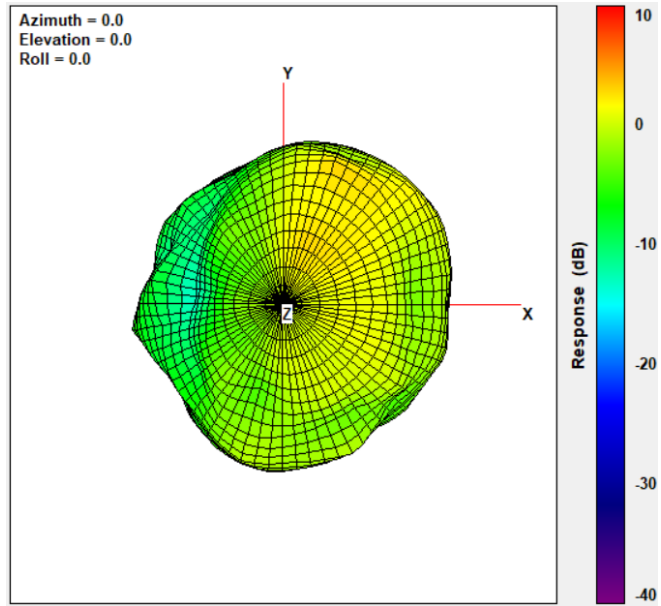


Max Antenna 3D Radiation Pattern 5725-5850 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5725-5850	1.29

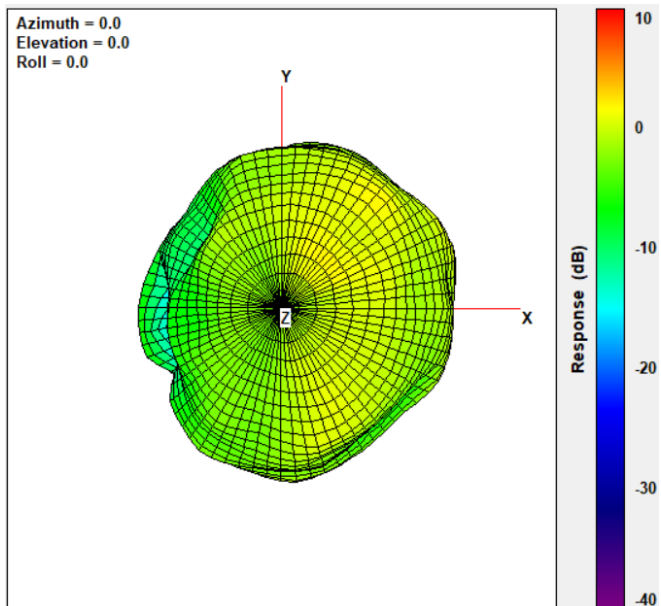


Max Antenna 3D Radiation Pattern 5925-6425 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5925-6425	2.92

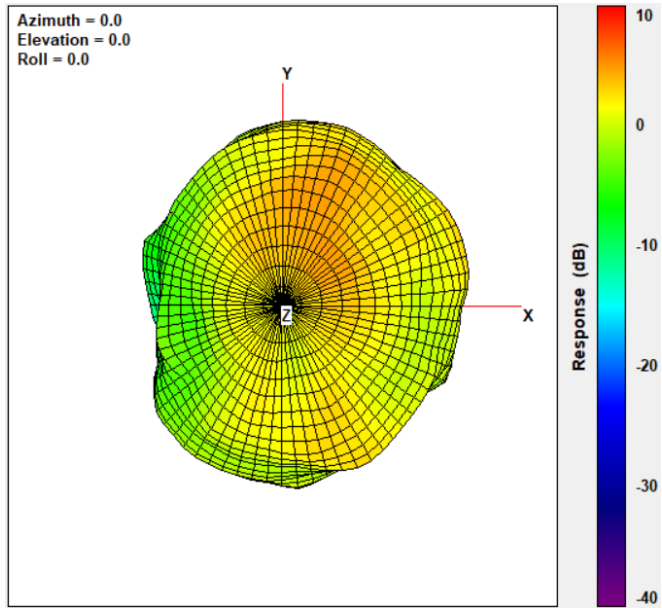


Max Antenna 3D Radiation Pattern 6425-6525 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6425-6525	2.83

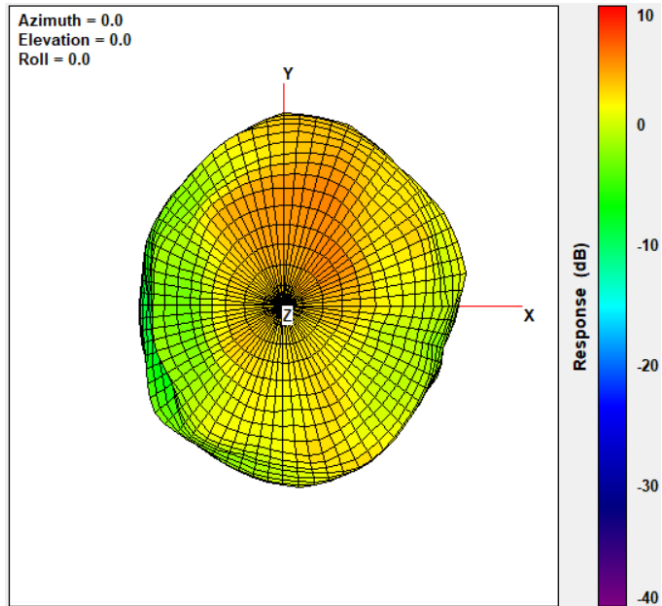


Max Antenna 3D Radiation Pattern 6525-6875 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6525-6875	2.91

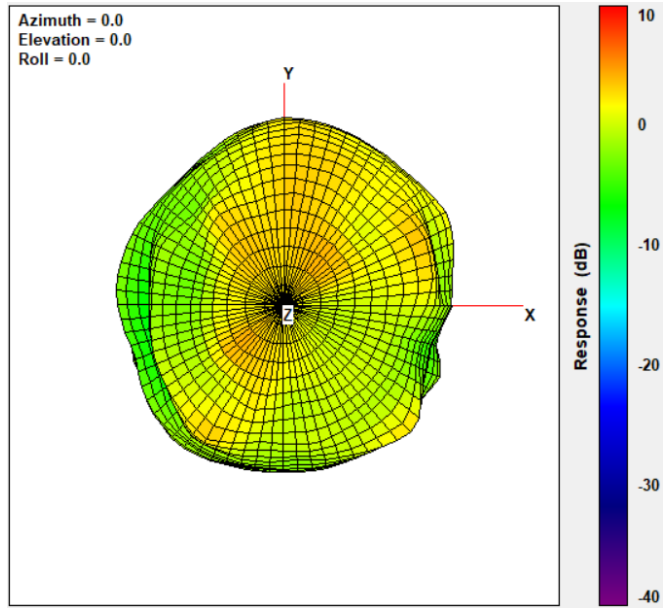

Max Antenna 3D Radiation Pattern 6875-7125 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6875-7125	2.99

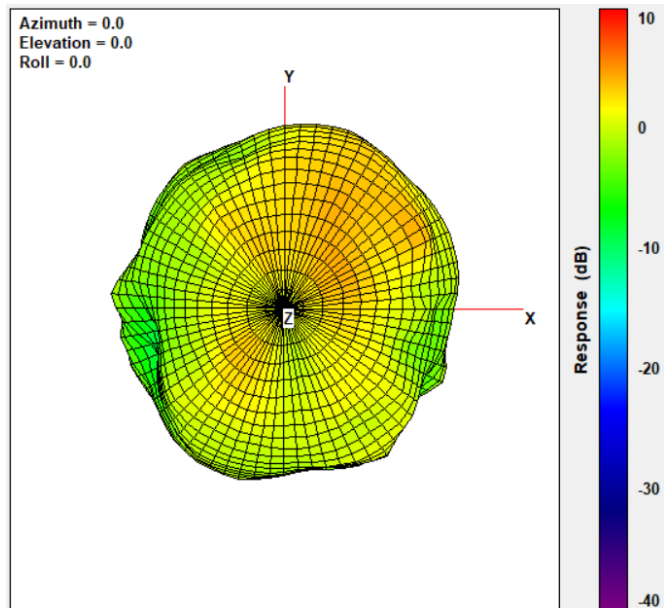

BT Antenna

Max Antenna 3D Radiation Pattern 2400 – 2483.5 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
2400-2483.5	1.06

