



99% Bandwidth - QPSK


10MHz Channel Bandwidth

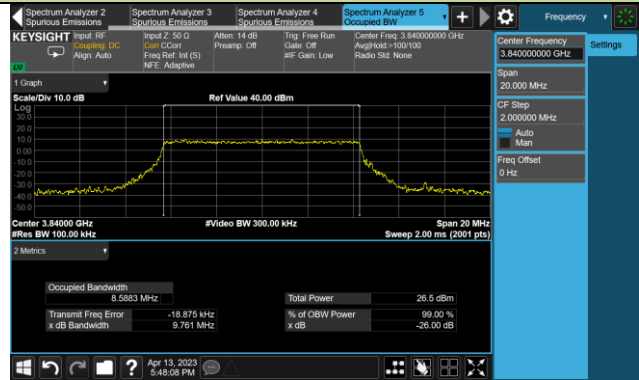


15MHz Channel Bandwidth

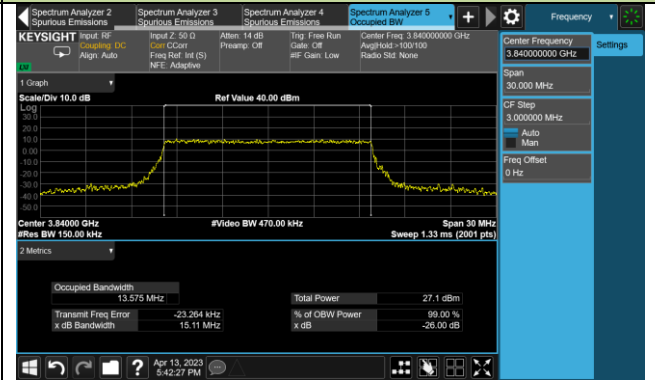


20MHz Channel Bandwidth

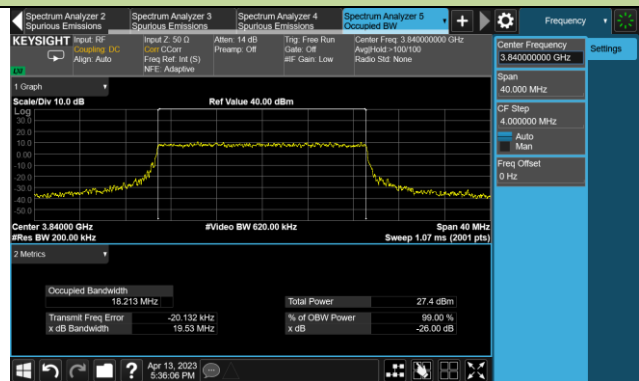


30MHz Channel Bandwidth

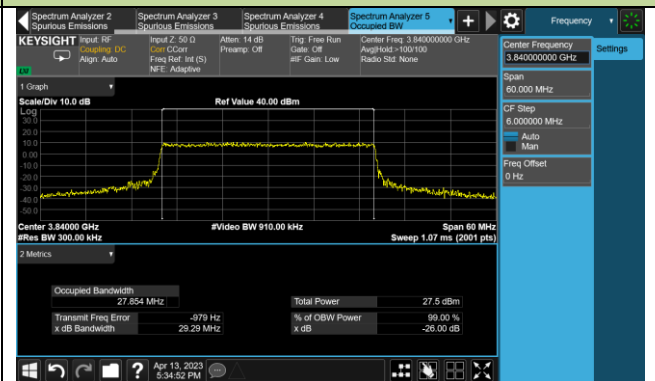



40MHz Channel Bandwidth

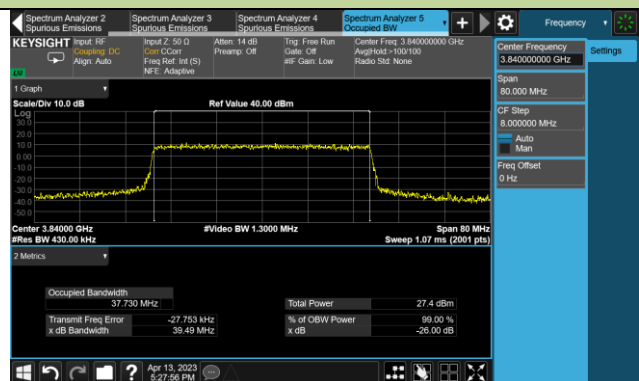


50MHz Channel Bandwidth

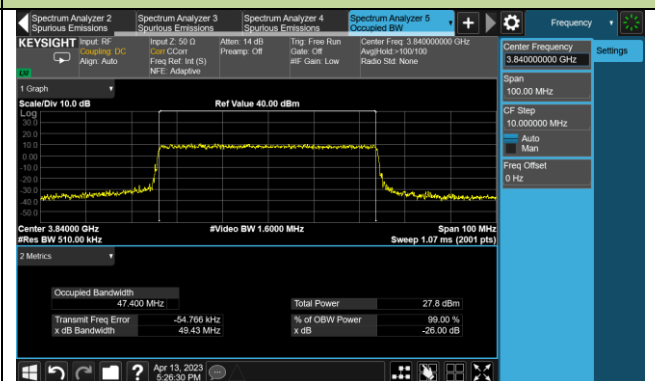

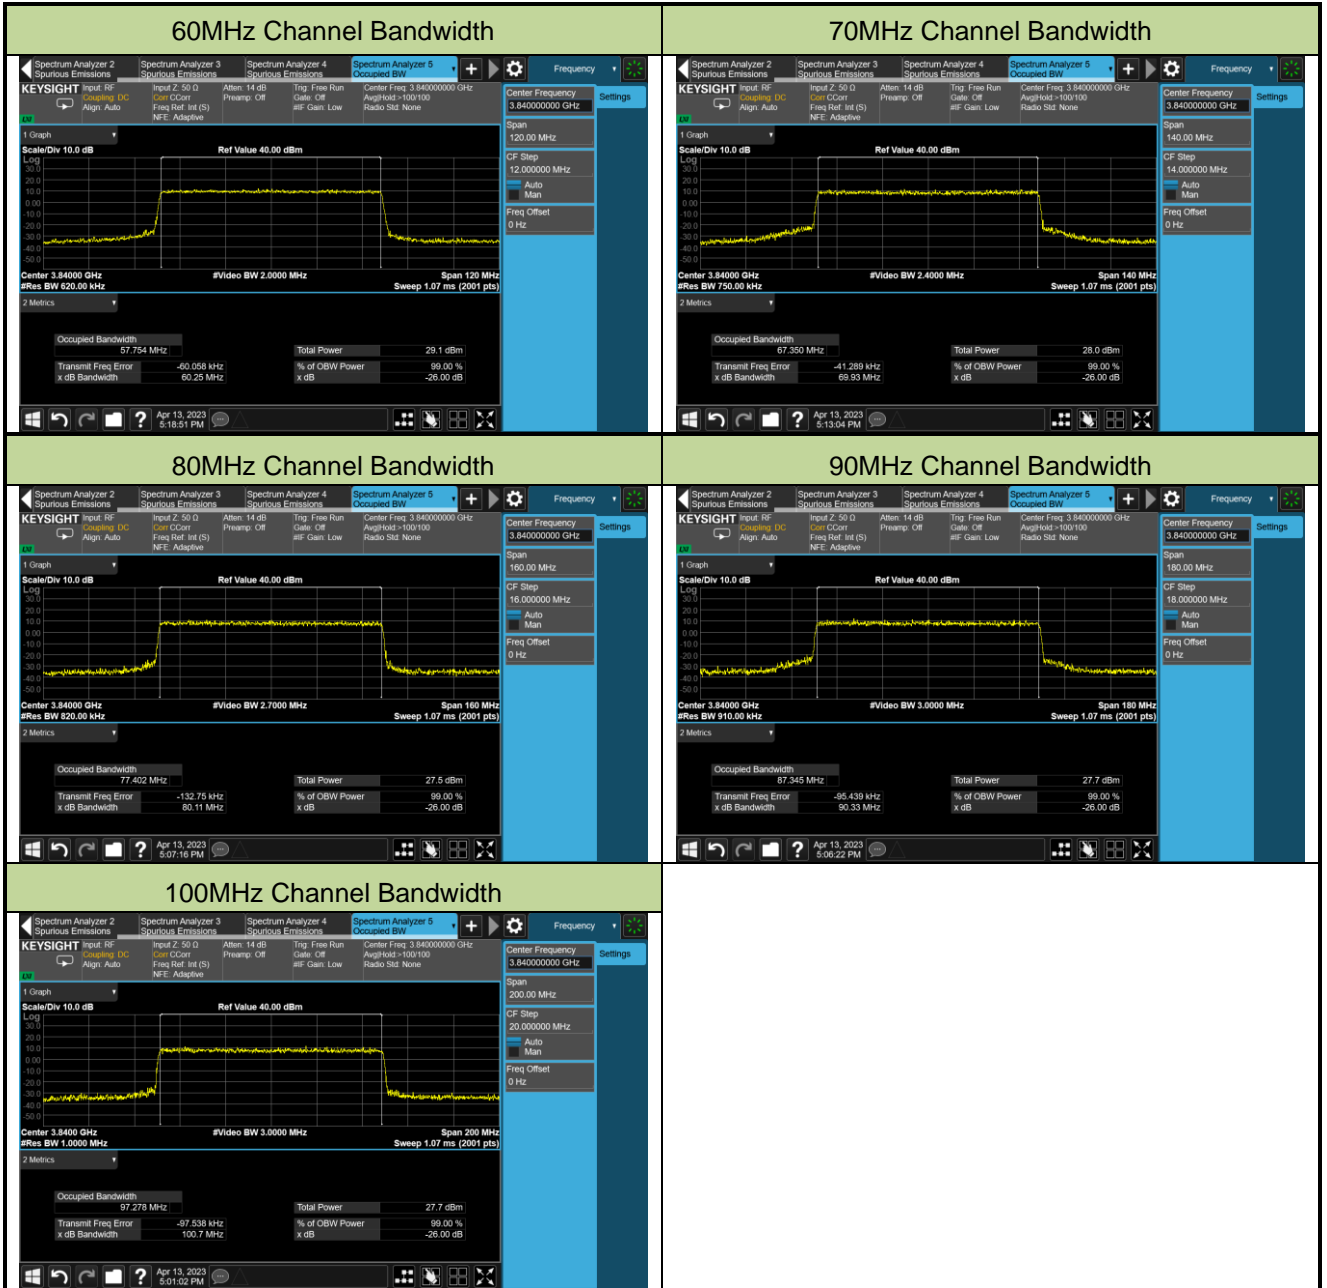


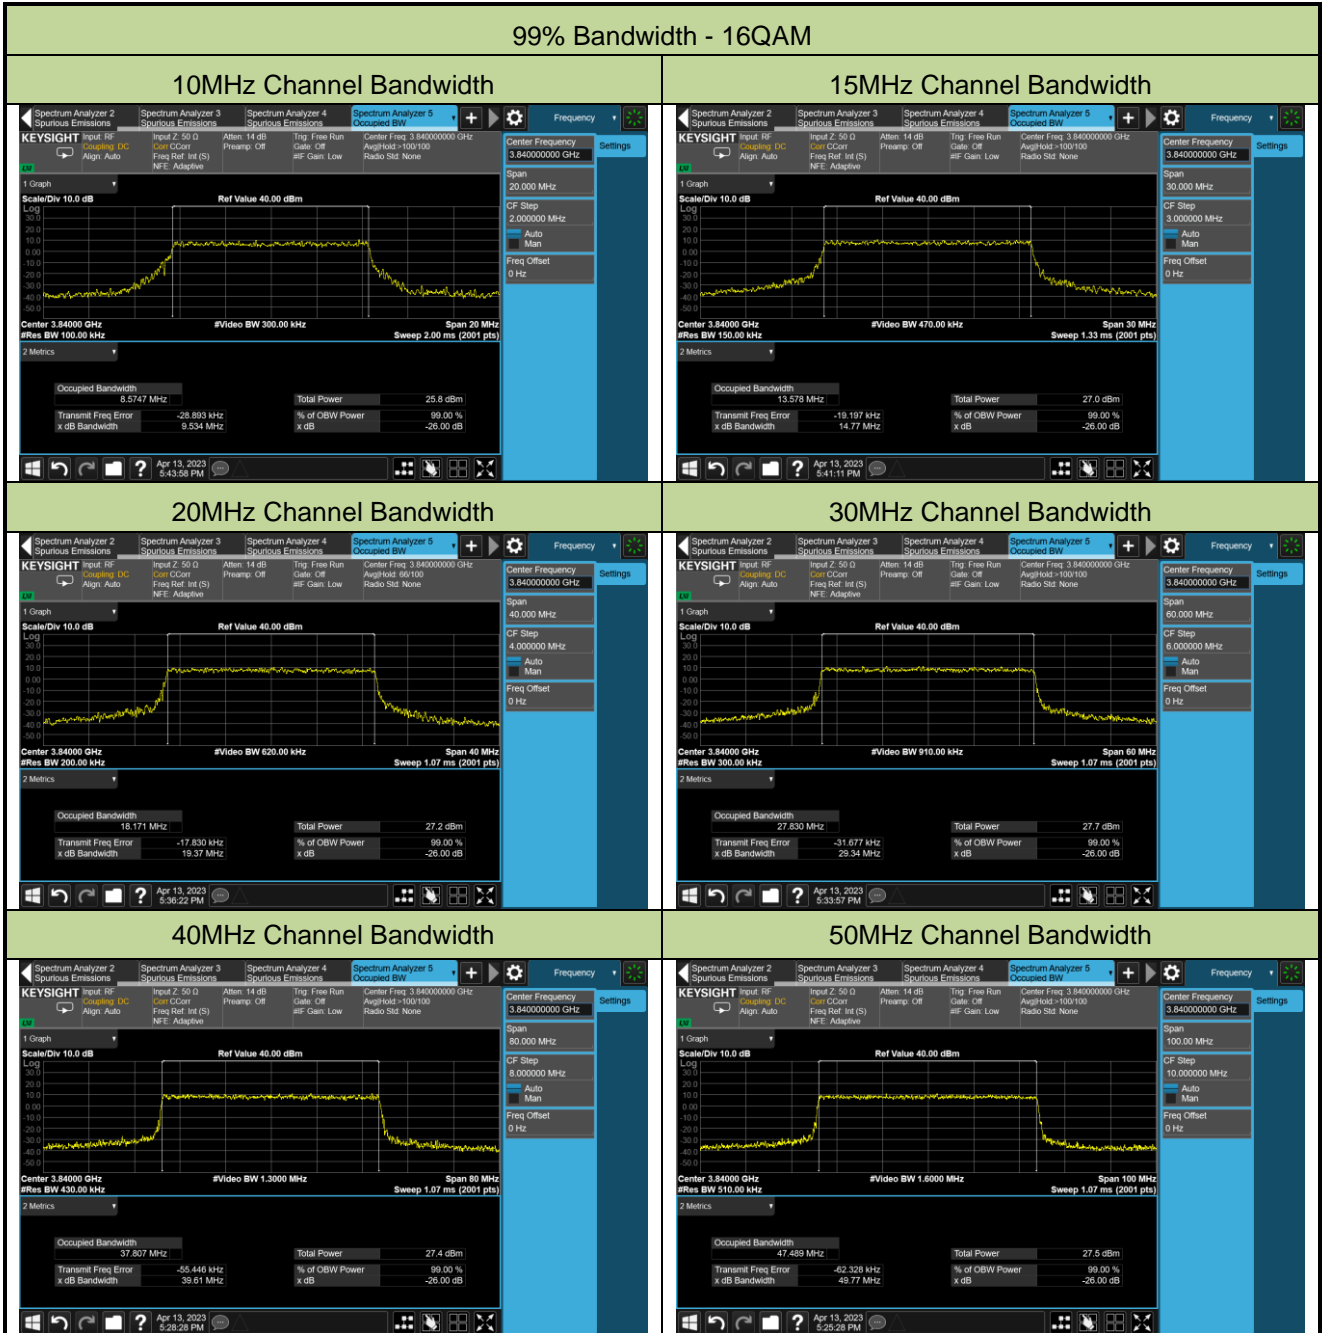

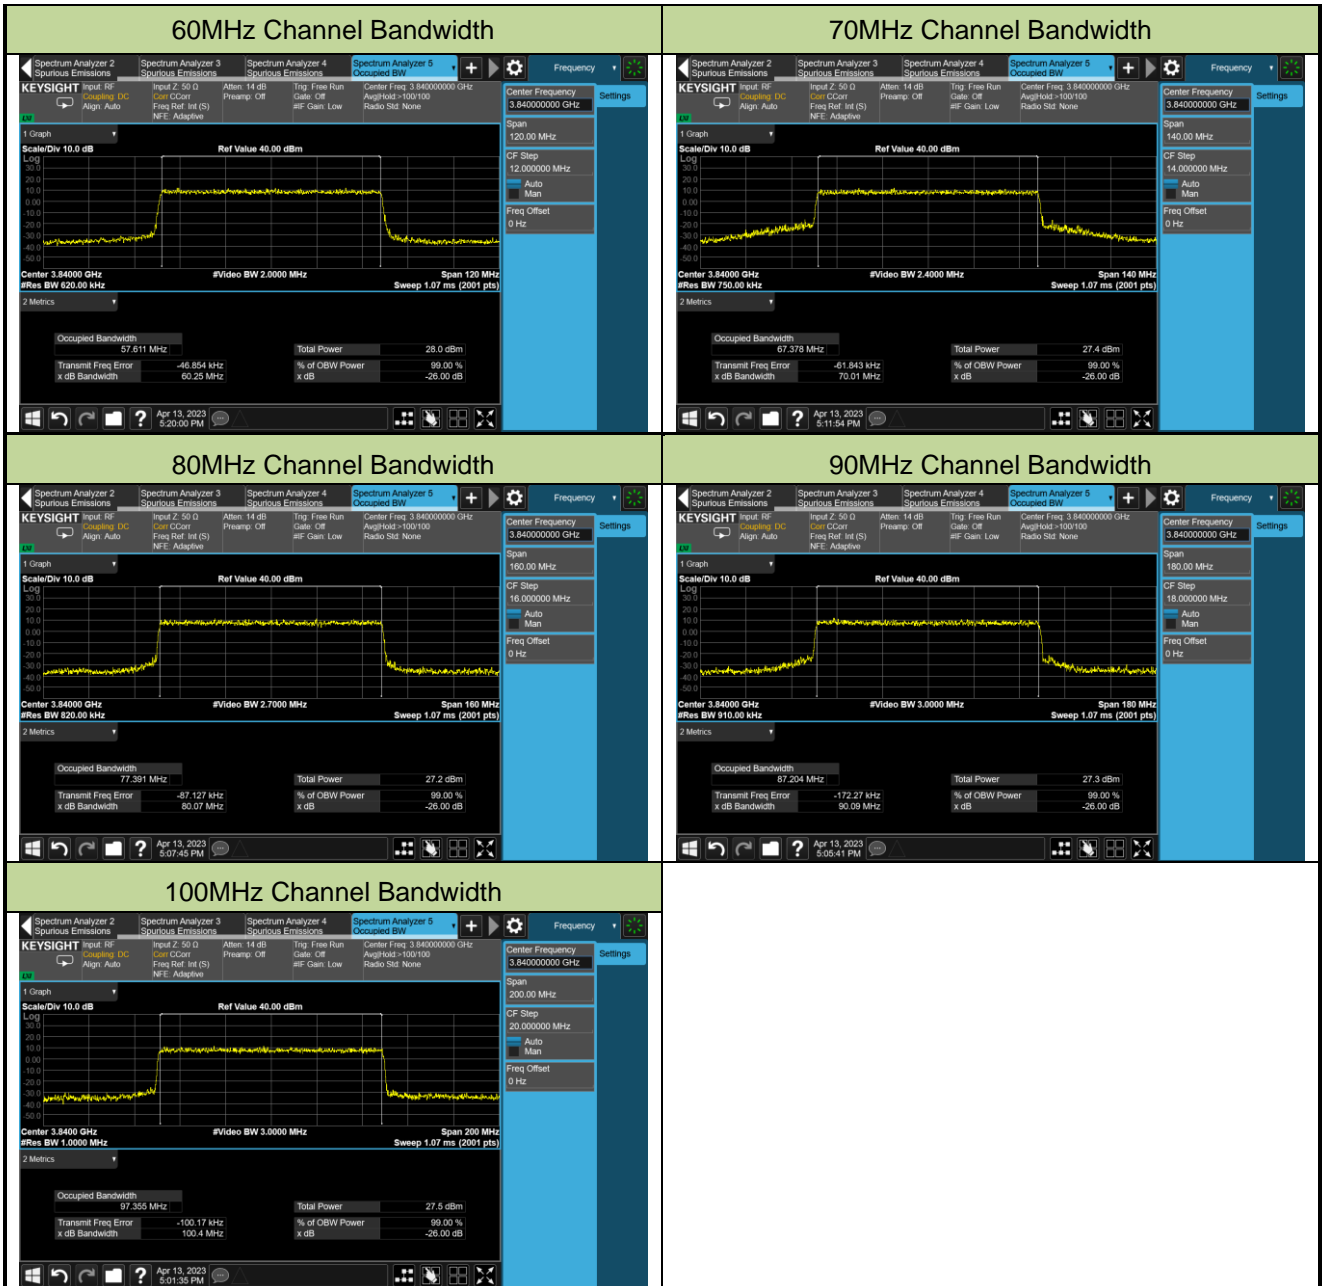


99% Bandwidth - 64QAM


10MHz Channel Bandwidth

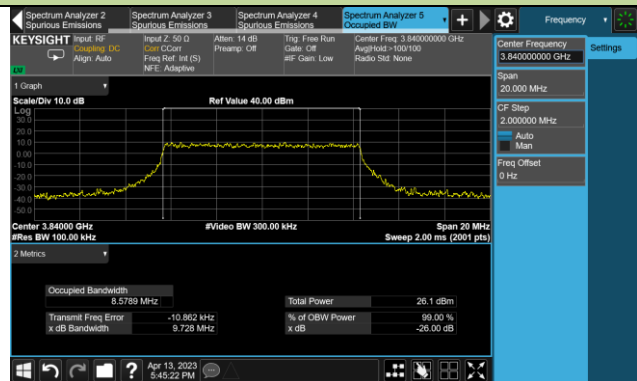


15MHz Channel Bandwidth

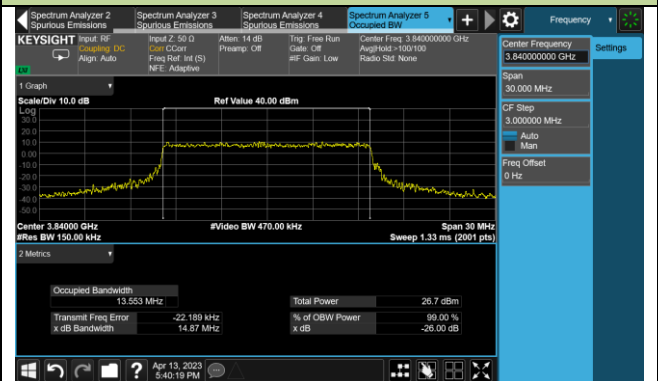


20MHz Channel Bandwidth

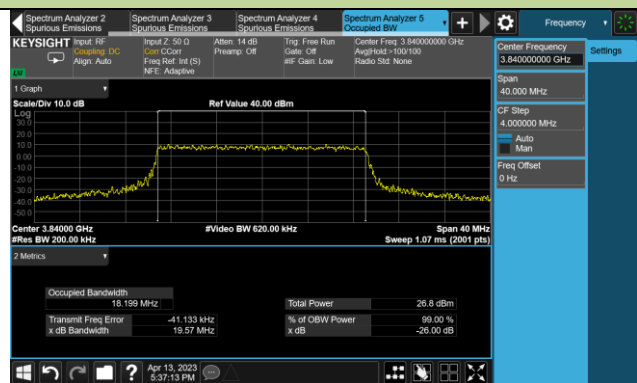


30MHz Channel Bandwidth

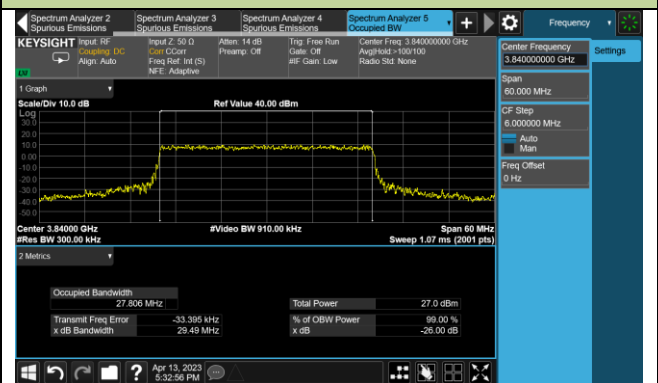


40MHz Channel Bandwidth

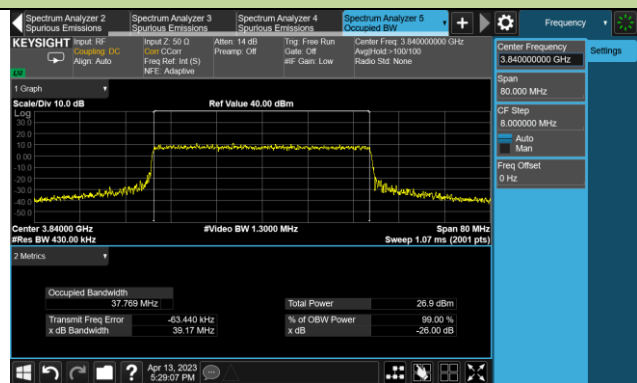


50MHz Channel Bandwidth

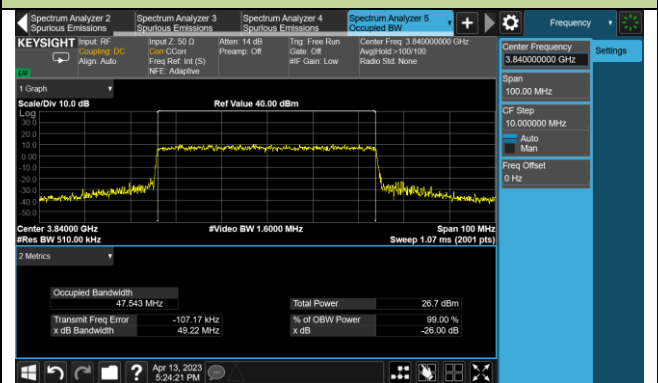

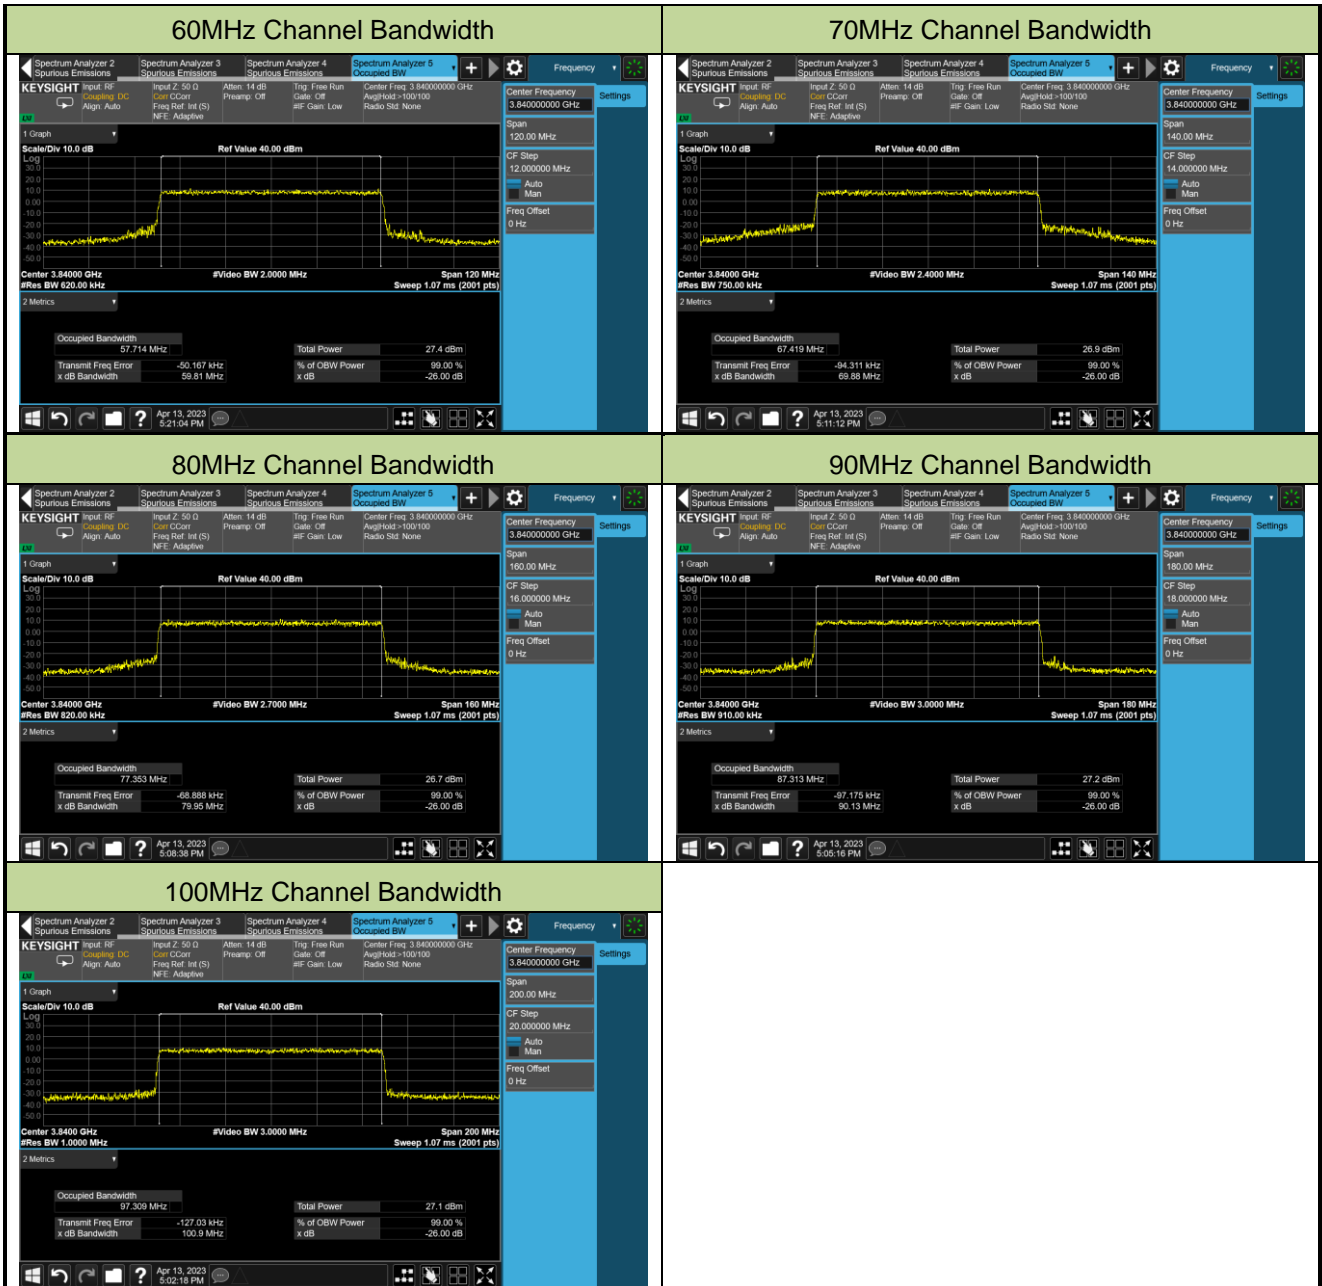


99% Bandwidth - 256QAM


10MHz Channel Bandwidth

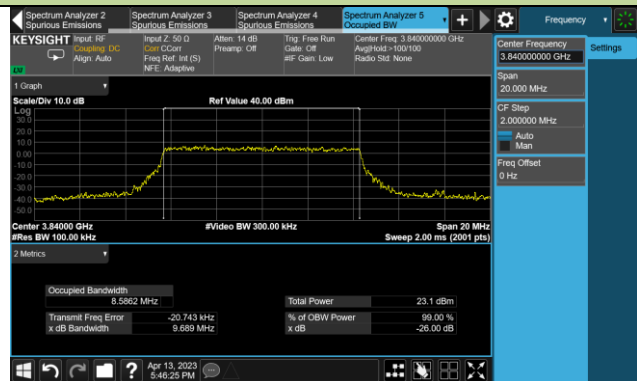


15MHz Channel Bandwidth

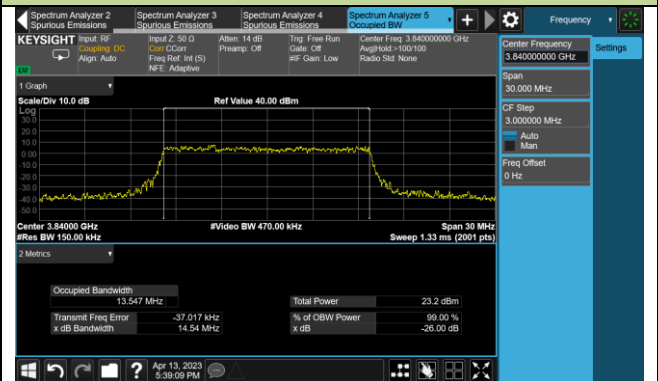


20MHz Channel Bandwidth

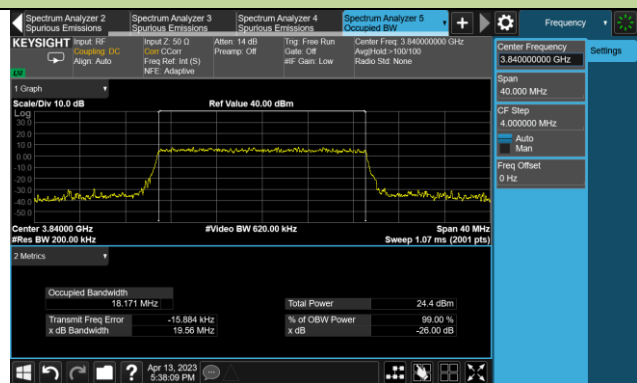


30MHz Channel Bandwidth

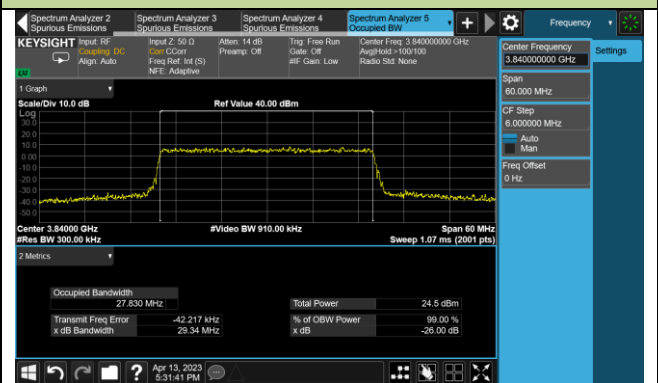


40MHz Channel Bandwidth

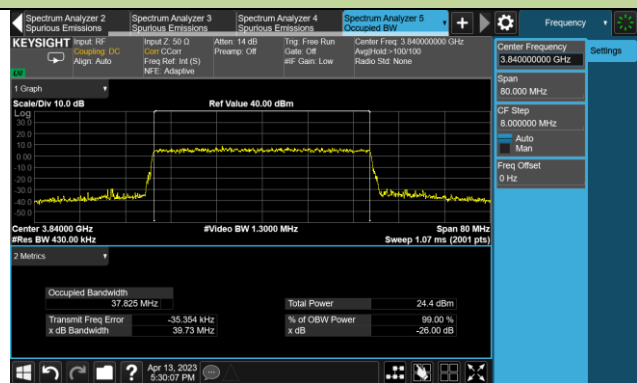

50MHz Channel Bandwidth

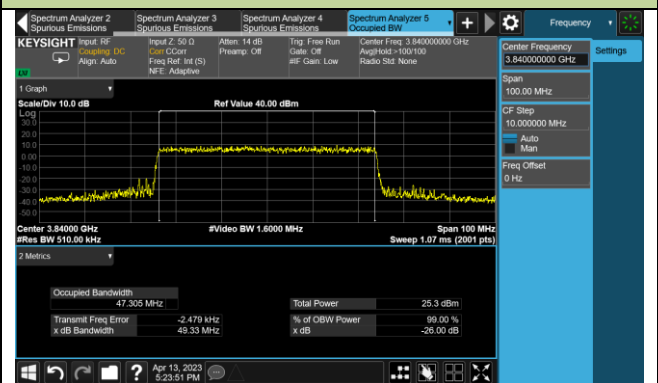

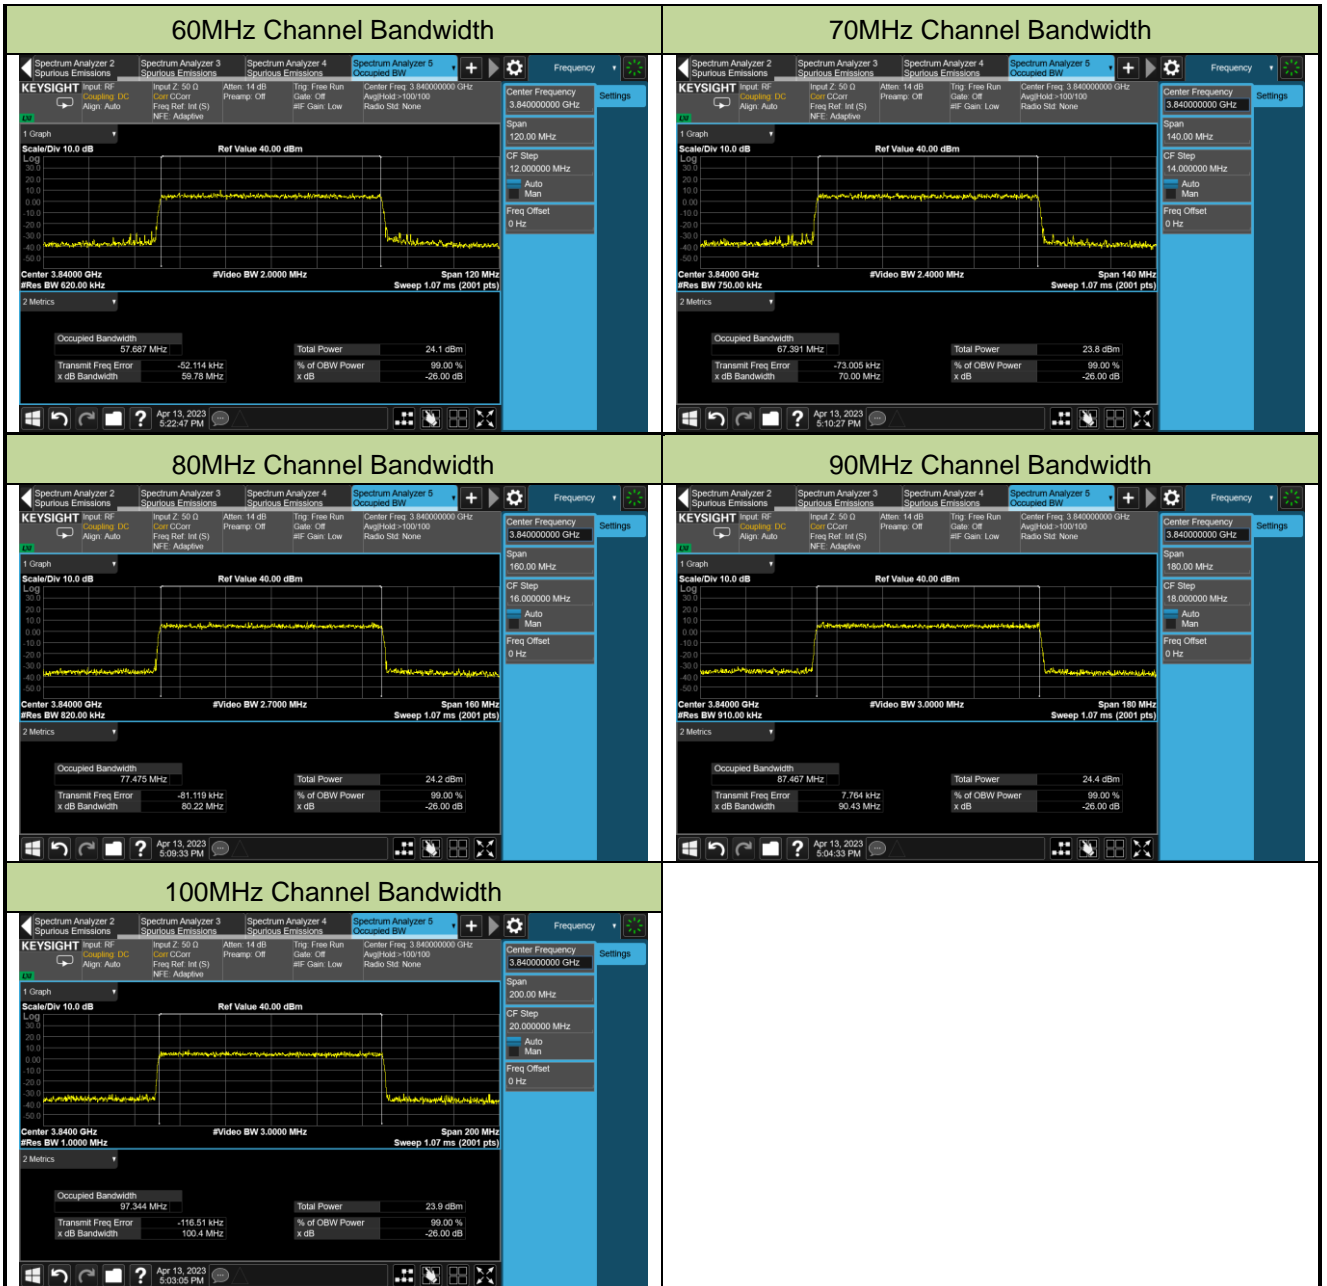

A.2 Frequency Stability Test Result

Test Site	WZ-TR3	Test Engineer	Cloud Guo
Test Date	2023/04/13 ~ 2023/04/14	Test Band	n41_UL MIMO_Port 3

Voltage	Temp (°C)	Frequency Range (MHz)		Frequency stability (ppm)	Within Authorized Frequency Block
		2496	2690		
		f _L	f _H		
Normal	+ 20 (Ref)	2496.9170	2689.0837	0	Pass
	+ 50	2496.9315	2689.1047	0.0121	Pass
	+ 40	2496.9377	2689.0965	-0.0004	Pass
	+ 30	2496.9326	2689.1047	0.0000	Pass
	+ 10	2496.9246	2689.1063	-0.0035	Pass
	0	2496.9238	2689.1043	0.0004	Pass
	- 10	2496.9273	2689.1048	0.0000	Pass
	- 20	2496.9143	2689.0698	-0.0012	Pass
	- 30	2496.9129	2689.0788	0.0013	Pass
15%	+ 20	2496.9208	2689.0904	-0.0013	Pass
-15%	+ 20	2496.9279	2689.0922	-0.2389	Pass

Test Site	WZ-TR3	Test Engineer	Cloud Guo
Test Date	2023/04/13 ~ 2023/04/14	Test Band	n77/78_UL MIMO (3450~3550MHz) Port 0

Voltage	Temp (°C)	Frequency Range (MHz)		Frequency stability (ppm)	Within Authorized Frequency Block
		3450	3550		
		f _L	f _H		
Normal	+ 20 (Ref)	3450.6790	3549.2531	0	Pass
	+ 50	3450.6798	3549.2677	0.0003	Pass
	+ 40	3450.6863	3549.2632	-0.0004	Pass
	+ 30	3450.6888	3549.2572	0.0005	Pass
	+ 10	3450.6813	3549.2613	0.0013	Pass
	0	3450.6897	3549.2724	0.0015	Pass
	- 10	3450.6897	3549.2658	0.0011	Pass
	- 20	3450.6920	3549.2524	-0.0006	Pass
	- 30	3450.6855	3549.2563	0.0001	Pass
15%	+ 20	3450.6828	3549.2477	-0.0010	Pass
-15%	+ 20	3450.6824	3549.2598	-0.0153	Pass

Test Site	WZ-TR3	Test Engineer	Cloud Guo
Test Date	2023/04/13 ~ 2023/04/14	Test Band	n77/78_UL MIMO (3700~3980MHz) Port 0

Voltage	Temp (°C)	Frequency Range (MHz)		Frequency stability (ppm)	Within Authorized Frequency Block
		3700	3980		
		f _L	f _H		
Normal	+ 20 (Ref)	3700.6942	3979.2601	0	Pass
	+ 50	3700.6963	3979.2800	0.0263	Pass
	+ 40	3700.6961	3979.2730	0.0276	Pass
	+ 30	3700.7079	3979.2743	0.0263	Pass
	+ 10	3700.6930	3979.2753	0.0271	Pass
	0	3700.6909	3979.2789	0.0249	Pass
	- 10	3700.6930	3979.2816	0.0272	Pass
	- 20	3700.6671	3979.2720	0.0264	Pass
	- 30	3700.6859	3979.2643	0.0264	Pass
15%	+ 20	3700.6837	3979.2688	0.0269	Pass
-15%	+ 20	3700.6912	3979.2680	0.0239	Pass

A.3 Equivalent Isotropically Radiated Power Test Result

Test Site	WZ-SR6	Test Engineer	Cloud Guo
Test Date	2023/03/23 ~ 2023/03/27	Test Band	n41_UL MIMO

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM PI/2 BPSK								
20	2506.02	25	12	26.89	26.17	29.56	30.74	< 33.01
		1	1	26.70	26.05	29.40	30.58	< 33.01
		1	49	26.77	26.11	29.46	30.64	< 33.01
		50	0	25.25	24.56	27.93	29.11	< 33.01
		1	0	20.78	19.99	23.41	24.59	< 33.01
		1	50	20.71	20.10	23.43	24.61	< 33.01
20	2592.99	25	12	26.65	26.18	29.43	30.61	< 33.01
		1	1	26.68	26.12	29.42	30.60	< 33.01
		1	49	26.74	26.20	29.49	30.67	< 33.01
		50	0	25.19	24.67	27.95	29.13	< 33.01
		1	0	20.78	20.23	23.52	24.70	< 33.01
		1	50	20.68	20.36	23.53	24.71	< 33.01
20	2679.99	25	12	24.66	26.16	28.48	29.66	< 33.01
		1	1	26.74	26.14	29.46	30.64	< 33.01
		1	49	26.66	26.28	29.48	30.66	< 33.01
		50	0	25.17	24.63	27.92	29.10	< 33.01
		1	0	20.72	20.26	23.51	24.69	< 33.01
		1	50	20.65	20.40	23.54	24.72	< 33.01
30	2511	36	18	26.81	26.14	29.50	30.68	< 33.01
		1	1	26.83	26.19	29.53	30.71	< 33.01
		1	76	26.80	26.25	29.54	30.72	< 33.01
		75	0	25.26	24.72	28.01	29.19	< 33.01
		1	0	20.81	20.04	23.45	24.63	< 33.01
		1	77	20.76	20.36	23.57	24.75	< 33.01

Note 1: Total Power (dBm) = $10 \cdot \log\{10^{\text{Port 0 Output Power} / 10} + 10^{\text{Port 1 Output Power} / 10}\}$

Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM PI/2 BPSK								
30	2592.99	36	18	26.74	26.16	29.47	30.65	< 33.01
		1	1	26.78	26.19	29.51	30.69	< 33.01
		1	76	26.79	26.35	29.59	30.77	< 33.01
		75	0	25.27	24.72	28.01	29.19	< 33.01
		1	0	20.82	20.27	23.56	24.74	< 33.01
		1	77	20.87	20.54	23.72	24.90	< 33.01
30	2674.98	36	18	26.78	26.14	29.48	30.66	< 33.01
		1	1	26.66	26.04	29.37	30.55	< 33.01
		1	76	26.76	26.35	29.57	30.75	< 33.01
		75	0	25.25	24.63	27.96	29.14	< 33.01
		1	0	20.78	20.23	23.52	24.70	< 33.01
		1	77	20.81	20.57	23.70	24.88	< 33.01
40	2516.01	50	25	26.89	26.36	29.64	30.82	< 33.01
		1	1	26.93	26.20	29.59	30.77	< 33.01
		1	104	26.79	26.25	29.54	30.72	< 33.01
		100	0	25.30	24.75	28.04	29.22	< 33.01
		1	0	20.86	20.12	23.52	24.70	< 33.01
		1	105	20.76	20.32	23.56	24.74	< 33.01
40	2592.99	50	25	26.42	25.98	29.22	30.40	< 33.01
		1	1	26.50	26.07	29.30	30.48	< 33.01
		1	104	26.56	26.23	29.41	30.59	< 33.01
		100	0	24.91	24.56	27.75	28.93	< 33.01
		1	0	20.65	19.98	23.34	24.52	< 33.01
		1	105	20.55	20.30	23.44	24.62	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM PI/2 BPSK								
40	2670	50	25	26.44	26.05	29.26	30.44	< 33.01
		1	1	26.43	26.03	29.24	30.42	< 33.01
		1	104	26.45	26.21	29.34	30.52	< 33.01
		100	0	24.91	24.57	27.75	28.93	< 33.01
		1	0	20.59	20.07	23.35	24.53	< 33.01
		1	105	20.51	20.36	23.45	24.63	< 33.01
50	2521.02	64	32	26.65	26.41	29.54	30.72	< 33.01
		1	1	26.75	26.03	29.42	30.60	< 33.01
		1	131	26.43	26.27	29.36	30.54	< 33.01
		128	0	25.25	24.82	28.05	29.23	< 33.01
		1	0	20.87	20.18	23.55	24.73	< 33.01
		1	132	20.46	20.25	23.37	24.55	< 33.01
50	2592.99	64	32	26.70	26.14	29.44	30.62	< 33.01
		1	1	26.58	26.03	29.32	30.50	< 33.01
		1	131	26.66	26.33	29.51	30.69	< 33.01
		128	0	25.16	24.64	27.92	29.10	< 33.01
		1	0	20.79	19.93	23.39	24.57	< 33.01
		1	132	20.68	20.52	23.61	24.79	< 33.01
50	2664.99	64	32	26.52	26.18	29.36	30.54	< 33.01
		1	1	26.40	26.02	29.22	30.40	< 33.01
		1	131	26.50	26.24	29.38	30.56	< 33.01
		128	0	25.03	24.76	27.91	29.09	< 33.01
		1	0	20.59	19.98	23.31	24.49	< 33.01
		1	132	20.59	20.35	23.48	24.66	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM PI/2 BPSK								
60	2526	81	40	26.75	26.47	29.62	30.80	< 33.01
		1	1	26.81	26.02	29.44	30.62	< 33.01
		1	160	26.45	26.33	29.40	30.58	< 33.01
		162	0	25.25	24.81	28.05	29.23	< 33.01
		1	0	20.94	20.02	23.51	24.69	< 33.01
		1	161	20.64	20.30	23.48	24.66	< 33.01
60	2592.99	81	40	26.75	26.14	29.47	30.65	< 33.01
		1	1	26.63	26.03	29.35	30.53	< 33.01
		1	160	26.83	26.35	29.61	30.79	< 33.01
		162	0	25.27	24.62	27.97	29.15	< 33.01
		1	0	20.87	19.87	23.41	24.59	< 33.01
		1	161	20.83	20.40	23.63	24.81	< 33.01
60	2659.98	81	40	26.69	26.28	29.50	30.68	< 33.01
		1	1	26.58	26.03	29.32	30.50	< 33.01
		1	160	26.56	26.30	29.44	30.62	< 33.01
		162	0	25.12	24.77	27.96	29.14	< 33.01
		1	0	20.65	19.92	23.31	24.49	< 33.01
		1	161	20.58	20.41	23.51	24.69	< 33.01
70	2531.01	90	45	26.76	26.23	29.51	30.69	< 33.01
		1	1	26.81	26.05	29.46	30.64	< 33.01
		1	187	26.60	26.35	29.49	30.67	< 33.01
		180	0	25.35	24.77	28.08	29.26	< 33.01
		1	0	21.01	19.90	23.50	24.68	< 33.01
		1	188	20.63	20.32	23.49	24.67	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM PI/2 BPSK								
70	2592.99	90	45	26.74	26.09	29.44	30.62	< 33.01
		1	1	26.67	25.94	29.33	30.51	< 33.01
		1	187	26.74	26.24	29.51	30.69	< 33.01
		180	0	25.20	24.70	27.97	29.15	< 33.01
		1	0	20.87	19.84	23.40	24.58	< 33.01
		1	188	20.73	20.34	23.55	24.73	< 33.01
70	2655	90	45	26.63	26.15	29.41	30.59	< 33.01
		1	1	26.57	25.93	29.27	30.45	< 33.01
		1	187	26.61	26.22	29.43	30.61	< 33.01
		180	0	25.18	24.74	27.98	29.16	< 33.01
		1	0	20.83	19.90	23.40	24.58	< 33.01
		1	188	20.68	20.32	23.51	24.69	< 33.01
80	2536.02	108	54	26.75	26.34	29.56	30.74	< 33.01
		1	1	26.89	26.07	29.51	30.69	< 33.01
		1	215	26.71	26.49	29.61	30.79	< 33.01
		216	0	25.30	24.91	28.12	29.30	< 33.01
		1	0	21.05	19.89	23.52	24.70	< 33.01
		1	216	20.75	20.46	23.62	24.80	< 33.01
80	2592.99	108	54	26.65	25.98	29.34	30.52	< 33.01
		1	1	26.50	25.67	29.12	30.30	< 33.01
		1	215	26.73	26.24	29.50	30.68	< 33.01
		216	0	25.12	24.62	27.89	29.07	< 33.01
		1	0	20.73	19.58	23.20	24.38	< 33.01
		1	216	20.73	20.32	23.54	24.72	< 33.01

Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$

Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM PI/2 BPSK								
80	2649.99	108	54	26.53	26.17	29.36	30.54	< 33.01
		1	1	26.15	25.66	28.92	30.10	< 33.01
		1	215	26.47	26.19	29.34	30.52	< 33.01
		216	0	24.94	24.62	27.79	28.97	< 33.01
		1	0	20.46	19.57	23.05	24.23	< 33.01
		1	216	20.48	20.21	23.36	24.54	< 33.01
90	2541	120	60	26.65	26.13	29.41	30.59	< 33.01
		1	1	26.80	25.93	29.40	30.58	< 33.01
		1	243	26.57	26.40	29.50	30.68	< 33.01
		243	0	25.21	24.72	27.98	29.16	< 33.01
		1	0	20.84	19.68	23.31	24.49	< 33.01
		1	244	20.52	20.45	23.50	24.68	< 33.01
90	2592.99	120	60	26.69	26.03	29.38	30.56	< 33.01
		1	1	26.52	25.65	29.12	30.30	< 33.01
		1	243	26.67	26.27	29.48	30.66	< 33.01
		243	0	25.15	24.58	27.88	29.06	< 33.01
		1	0	20.75	19.72	23.28	24.46	< 33.01
		1	244	20.84	20.49	23.68	24.86	< 33.01
90	2644.98	120	60	26.68	26.12	29.42	30.60	< 33.01
		1	1	26.16	25.58	28.89	30.07	< 33.01
		1	243	26.60	26.24	29.43	30.61	< 33.01
		243	0	25.04	24.59	27.83	29.01	< 33.01
		1	0	20.62	19.53	23.12	24.30	< 33.01
		1	244	20.68	20.47	23.59	24.77	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM PI/2 BPSK								
100	2546.01	135	67	26.58	26.23	29.42	30.60	< 33.01
		1	1	26.78	25.92	29.38	30.56	< 33.01
		1	271	26.41	26.51	29.47	30.65	< 33.01
		270	0	25.27	24.77	28.04	29.22	< 33.01
		1	0	20.84	19.53	23.24	24.42	< 33.01
		1	272	20.46	20.48	23.48	24.66	< 33.01
100	2592.99	135	67	26.68	26.10	29.41	30.59	< 33.01
		1	1	26.50	25.58	29.07	30.25	< 33.01
		1	271	26.93	26.43	29.70	30.88	< 33.01
		270	0	25.22	24.56	27.91	29.09	< 33.01
		1	0	20.78	19.56	23.22	24.40	< 33.01
		1	272	20.90	20.44	23.69	24.87	< 33.01
100	2640	135	67	26.70	26.12	29.43	30.61	< 33.01
		1	1	26.47	25.63	29.08	30.26	< 33.01
		1	271	26.70	26.34	29.53	30.71	< 33.01
		270	0	25.15	24.55	27.87	29.05	< 33.01
		1	0	20.71	19.38	23.11	24.29	< 33.01
		1	272	20.72	20.36	23.55	24.73	< 33.01

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM QPSK								
20	2506.02	25	12	26.82	26.13	29.50	30.68	< 33.01
		1	1	26.80	25.98	29.42	30.60	< 33.01
		1	49	26.71	26.03	29.39	30.57	< 33.01
		50	0	24.76	24.17	27.49	28.67	< 33.01
		1	0	20.18	19.39	22.81	23.99	< 33.01
		1	50	20.24	19.56	22.92	24.10	< 33.01
20	2592.99	25	12	26.70	26.11	29.43	30.61	< 33.01
		1	1	26.69	26.04	29.39	30.57	< 33.01
		1	49	26.72	26.13	29.45	30.63	< 33.01
		50	0	24.70	24.20	27.47	28.65	< 33.01
		1	0	20.15	19.58	22.88	24.06	< 33.01
		1	50	20.22	19.75	23.00	24.18	< 33.01
20	2679.99	25	12	26.59	26.15	29.39	30.57	< 33.01
		1	1	26.62	26.07	29.36	30.54	< 33.01
		1	49	26.69	26.25	29.49	30.67	< 33.01
		50	0	24.63	24.20	27.43	28.61	< 33.01
		1	0	20.26	19.77	23.03	24.21	< 33.01
		1	50	20.12	19.93	23.04	24.22	< 33.01
30	2511	36	18	26.82	26.19	29.53	30.71	< 33.01
		1	1	26.82	26.13	29.50	30.68	< 33.01
		1	76	26.81	26.27	29.56	30.74	< 33.01
		75	0	24.86	24.32	27.61	28.79	< 33.01
		1	0	20.27	19.60	22.96	24.14	< 33.01
		1	77	20.22	19.63	22.95	24.13	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM QPSK								
30	2592.99	36	18	26.76	26.20	29.50	30.68	< 33.01
		1	1	26.77	26.13	29.47	30.65	< 33.01
		1	76	26.84	26.35	29.61	30.79	< 33.01
		75	0	24.75	24.32	27.55	28.73	< 33.01
		1	0	20.31	19.73	23.04	24.22	< 33.01
		1	77	20.32	20.01	23.18	24.36	< 33.01
30	2674.98	36	18	26.72	26.20	29.48	30.66	< 33.01
		1	1	26.68	26.04	29.38	30.56	< 33.01
		1	76	26.73	26.30	29.53	30.71	< 33.01
		75	0	24.78	24.26	27.54	28.72	< 33.01
		1	0	20.24	19.61	22.95	24.13	< 33.01
		1	77	20.32	20.15	23.25	24.43	< 33.01
40	2516.01	50	25	26.85	26.24	29.57	30.75	< 33.01
		1	1	26.90	26.18	29.57	30.75	< 33.01
		1	104	26.85	26.23	29.56	30.74	< 33.01
		100	0	24.82	24.25	27.55	28.73	< 33.01
		1	0	20.41	19.64	23.05	24.23	< 33.01
		1	105	20.32	19.87	23.11	24.29	< 33.01
40	2592.99	50	25	26.32	25.91	29.13	30.31	< 33.01
		1	1	26.55	26.04	29.31	30.49	< 33.01
		1	104	26.59	26.21	29.41	30.59	< 33.01
		100	0	24.46	24.02	27.26	28.44	< 33.01
		1	0	20.15	19.53	22.86	24.04	< 33.01
		1	105	20.12	19.78	22.96	24.14	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM QPSK								
40	2670	50	25	26.42	26.15	29.30	30.48	< 33.01
		1	1	26.51	26.01	29.28	30.46	< 33.01
		1	104	26.55	26.22	29.40	30.58	< 33.01
		100	0	24.40	24.13	27.28	28.46	< 33.01
		1	0	20.12	19.53	22.85	24.03	< 33.01
		1	105	20.03	19.86	22.96	24.14	< 33.01
50	2521.02	64	32	26.63	26.21	29.44	30.62	< 33.01
		1	1	26.75	25.96	29.38	30.56	< 33.01
		1	131	26.55	26.31	29.44	30.62	< 33.01
		128	0	24.63	24.27	27.46	28.64	< 33.01
		1	0	20.27	19.61	22.96	24.14	< 33.01
		1	132	20.01	19.89	22.96	24.14	< 33.01
50	2592.99	64	32	26.64	26.02	29.35	30.53	< 33.01
		1	1	26.61	26.01	29.33	30.51	< 33.01
		1	131	26.70	26.32	29.52	30.70	< 33.01
		128	0	24.69	24.22	27.47	28.65	< 33.01
		1	0	20.32	19.35	22.87	24.05	< 33.01
		1	132	20.17	20.05	23.12	24.30	< 33.01
50	2664.99	64	32	26.45	26.13	29.30	30.48	< 33.01
		1	1	26.49	26.00	29.26	30.44	< 33.01
		1	131	26.43	26.23	29.34	30.52	< 33.01
		128	0	24.43	24.21	27.33	28.51	< 33.01
		1	0	19.99	19.46	22.74	23.92	< 33.01
		1	132	19.95	20.02	23.00	24.18	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM QPSK								
60	2526	81	40	26.83	26.34	29.60	30.78	< 33.01
		1	1	26.82	26.03	29.45	30.63	< 33.01
		1	160	26.51	26.32	29.43	30.61	< 33.01
		162	0	24.76	24.36	27.57	28.75	< 33.01
		1	0	20.49	19.75	23.15	24.33	< 33.01
		1	161	20.06	19.81	22.95	24.13	< 33.01
60	2592.99	81	40	26.78	26.06	29.45	30.63	< 33.01
		1	1	26.62	26.01	29.34	30.52	< 33.01
		1	160	26.78	26.42	29.61	30.79	< 33.01
		162	0	24.77	24.13	27.47	28.65	< 33.01
		1	0	20.36	19.34	22.89	24.07	< 33.01
		1	161	20.37	20.02	23.21	24.39	< 33.01
60	2659.98	81	40	26.82	26.27	29.56	30.74	< 33.01
		1	1	26.74	26.02	29.41	30.59	< 33.01
		1	160	26.75	26.41	29.59	30.77	< 33.01
		162	0	24.76	24.30	27.55	28.73	< 33.01
		1	0	20.31	19.51	22.94	24.12	< 33.01
		1	161	20.16	19.88	23.03	24.21	< 33.01
70	2531.01	90	45	26.74	26.22	29.50	30.68	< 33.01
		1	1	26.86	26.13	29.52	30.70	< 33.01
		1	187	26.59	26.32	29.47	30.65	< 33.01
		180	0	24.72	24.30	27.53	28.71	< 33.01
		1	0	20.40	19.53	23.00	24.18	< 33.01
		1	188	20.12	19.84	22.99	24.17	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM QPSK								
70	2592.99	90	45	26.68	26.13	29.42	30.60	< 33.01
		1	1	26.68	25.93	29.33	30.51	< 33.01
		1	187	26.76	26.32	29.56	30.74	< 33.01
		180	0	24.70	24.19	27.46	28.64	< 33.01
		1	0	20.39	19.45	22.96	24.14	< 33.01
		1	188	20.32	19.89	23.12	24.30	< 33.01
70	2655	90	45	26.68	26.18	29.45	30.63	< 33.01
		1	1	26.59	25.93	29.28	30.46	< 33.01
		1	187	26.63	26.23	29.44	30.62	< 33.01
		180	0	24.63	24.20	27.43	28.61	< 33.01
		1	0	20.12	19.27	22.73	23.91	< 33.01
		1	188	20.08	19.84	22.97	24.15	< 33.01
80	2536.02	108	54	26.74	26.34	29.55	30.73	< 33.01
		1	1	26.92	26.18	29.58	30.76	< 33.01
		1	215	26.64	26.42	29.54	30.72	< 33.01
		216	0	24.80	24.37	27.60	28.78	< 33.01
		1	0	20.46	19.47	23.00	24.18	< 33.01
		1	216	20.22	19.99	23.12	24.30	< 33.01
80	2592.99	108	54	26.60	26.09	29.36	30.54	< 33.01
		1	1	26.47	25.61	29.07	30.25	< 33.01
		1	215	26.67	26.34	29.52	30.70	< 33.01
		216	0	24.55	24.03	27.31	28.49	< 33.01
		1	0	20.20	19.24	22.76	23.94	< 33.01
		1	216	20.24	19.85	23.06	24.24	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM QPSK								
80	2649.99	108	54	26.59	26.06	29.34	30.52	< 33.01
		1	1	26.21	25.70	28.97	30.15	< 33.01
		1	215	26.43	26.20	29.33	30.51	< 33.01
		216	0	24.54	24.28	27.42	28.60	< 33.01
		1	0	20.01	19.04	22.56	23.74	< 33.01
		1	216	20.06	19.83	22.96	24.14	< 33.01
90	2541	120	60	26.63	26.08	29.37	30.55	< 33.01
		1	1	26.73	25.97	29.38	30.56	< 33.01
		1	243	26.47	26.28	29.39	30.57	< 33.01
		243	0	24.63	24.18	27.42	28.60	< 33.01
		1	0	20.33	19.22	22.82	24.00	< 33.01
		1	244	20.06	19.89	22.99	24.17	< 33.01
90	2592.99	120	60	26.68	26.06	29.39	30.57	< 33.01
		1	1	26.52	25.64	29.11	30.29	< 33.01
		1	243	26.75	26.32	29.55	30.73	< 33.01
		243	0	24.65	24.12	27.40	28.58	< 33.01
		1	0	20.28	19.21	22.79	23.97	< 33.01
		1	244	20.37	19.95	23.18	24.36	< 33.01
90	2644.98	120	60	26.62	26.05	29.35	30.53	< 33.01
		1	1	26.31	25.69	29.02	30.20	< 33.01
		1	243	26.58	26.21	29.41	30.59	< 33.01
		243	0	24.57	24.31	27.45	28.63	< 33.01
		1	0	20.03	18.95	22.53	23.71	< 33.01
		1	244	20.12	19.83	22.99	24.17	< 33.01

Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$

Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM QPSK								
100	2546.01	135	67	26.61	26.22	29.43	30.61	< 33.01
		1	1	26.80	25.98	29.42	30.60	< 33.01
		1	271	26.48	26.49	29.50	30.68	< 33.01
		270	0	24.79	24.28	27.55	28.73	< 33.01
		1	0	20.37	19.45	22.94	24.12	< 33.01
		1	272	19.95	20.08	23.03	24.21	< 33.01
100	2592.99	135	67	26.68	26.02	29.37	30.55	< 33.01
		1	1	26.54	25.73	29.16	30.34	< 33.01
		1	271	26.78	26.45	29.63	30.81	< 33.01
		270	0	24.68	24.00	27.36	28.54	< 33.01
		1	0	20.26	19.07	22.72	23.90	< 33.01
		1	272	20.39	19.95	23.19	24.37	< 33.01
100	2640	135	67	26.69	26.10	29.42	30.60	< 33.01
		1	1	26.48	25.73	29.13	30.31	< 33.01
		1	271	26.72	26.36	29.55	30.73	< 33.01
		270	0	24.53	24.13	27.34	28.52	< 33.01
		1	0	20.24	18.90	22.63	23.81	< 33.01
		1	272	20.20	19.86	23.04	24.22	< 33.01

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM 16QAM								
20	2506.02	25	12	25.75	25.16	28.48	29.66	< 33.01
		1	1	25.53	24.93	28.25	29.43	< 33.01
		1	49	25.56	24.92	28.26	29.44	< 33.01
		50	0	23.77	23.10	26.46	27.64	< 33.01
		1	0	20.23	19.49	22.89	24.07	< 33.01
		1	50	19.96	19.35	22.68	23.86	< 33.01
20	2592.99	25	12	25.73	25.13	28.45	29.63	< 33.01
		1	1	25.69	25.03	28.38	29.56	< 33.01
		1	49	25.78	25.23	28.52	29.70	< 33.01
		50	0	23.67	23.15	26.43	27.61	< 33.01
		1	0	20.14	19.55	22.87	24.05	< 33.01
		1	50	20.21	19.89	23.06	24.24	< 33.01
20	2679.99	25	12	25.70	25.17	28.45	29.63	< 33.01
		1	1	25.48	24.84	28.18	29.36	< 33.01
		1	49	25.30	25.08	28.20	29.38	< 33.01
		50	0	23.58	23.29	26.45	27.63	< 33.01
		1	0	20.05	19.66	22.87	24.05	< 33.01
		1	50	20.01	19.64	22.84	24.02	< 33.01
30	2511	36	18	25.82	25.14	28.50	29.68	< 33.01
		1	1	25.72	25.00	28.39	29.57	< 33.01
		1	76	25.57	25.11	28.36	29.54	< 33.01
		75	0	23.90	23.23	26.59	27.77	< 33.01
		1	0	20.21	19.56	22.91	24.09	< 33.01
		1	77	20.26	19.74	23.02	24.20	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM 16QAM								
30	2592.99	36	18	25.73	25.22	28.49	29.67	< 33.01
		1	1	25.68	25.08	28.40	29.58	< 33.01
		1	76	25.76	25.33	28.56	29.74	< 33.01
		75	0	23.80	23.35	26.59	27.77	< 33.01
		1	0	20.27	19.72	23.01	24.19	< 33.01
		1	77	20.28	20.02	23.16	24.34	< 33.01
30	2674.98	36	18	25.73	25.17	28.47	29.65	< 33.01
		1	1	25.49	25.01	28.27	29.45	< 33.01
		1	76	25.67	25.32	28.51	29.69	< 33.01
		75	0	23.80	23.23	26.53	27.71	< 33.01
		1	0	20.06	19.40	22.75	23.93	< 33.01
		1	77	20.01	19.83	22.93	24.11	< 33.01
40	2516.01	50	25	25.76	25.22	28.51	29.69	< 33.01
		1	1	25.82	25.13	28.50	29.68	< 33.01
		1	104	25.77	25.28	28.54	29.72	< 33.01
		100	0	23.79	23.24	26.53	27.71	< 33.01
		1	0	20.42	19.57	23.03	24.21	< 33.01
		1	105	20.29	19.88	23.10	24.28	< 33.01
40	2592.99	50	25	25.76	25.18	28.49	29.67	< 33.01
		1	1	25.68	25.17	28.44	29.62	< 33.01
		1	104	26.00	25.48	28.76	29.94	< 33.01
		100	0	23.82	23.37	26.61	27.79	< 33.01
		1	0	20.34	19.62	23.01	24.19	< 33.01
		1	105	20.35	20.00	23.19	24.37	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM 16QAM								
40	2670	50	25	25.41	25.12	28.28	29.46	< 33.01
		1	1	25.52	25.05	28.30	29.48	< 33.01
		1	104	25.56	25.34	28.46	29.64	< 33.01
		100	0	23.41	23.12	26.28	27.46	< 33.01
		1	0	19.82	19.30	22.58	23.76	< 33.01
		1	105	19.77	19.57	22.68	23.86	< 33.01
50	2521.02	64	32	25.68	25.18	28.45	29.63	< 33.01
		1	1	25.46	24.82	28.16	29.34	< 33.01
		1	131	25.22	25.02	28.13	29.31	< 33.01
		128	0	23.70	23.33	26.53	27.71	< 33.01
		1	0	20.09	19.22	22.69	23.87	< 33.01
		1	132	19.65	19.45	22.56	23.74	< 33.01
50	2592.99	64	32	25.66	25.07	28.39	29.57	< 33.01
		1	1	25.52	24.82	28.19	29.37	< 33.01
		1	131	25.55	25.27	28.42	29.60	< 33.01
		128	0	23.70	23.14	26.44	27.62	< 33.01
		1	0	20.34	19.33	22.87	24.05	< 33.01
		1	132	20.23	20.12	23.19	24.37	< 33.01
50	2664.99	64	32	25.44	25.16	28.31	29.49	< 33.01
		1	1	25.27	25.05	28.17	29.35	< 33.01
		1	131	25.34	25.26	28.31	29.49	< 33.01
		128	0	23.48	23.19	26.35	27.53	< 33.01
		1	0	19.96	19.33	22.67	23.85	< 33.01
		1	132	19.86	19.76	22.82	24.00	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM 16QAM								
60	2526	81	40	25.73	25.33	28.54	29.72	< 33.01
		1	1	25.65	24.83	28.27	29.45	< 33.01
		1	160	25.34	25.18	28.27	29.45	< 33.01
		162	0	23.77	23.29	26.55	27.73	< 33.01
		1	0	20.21	19.51	22.88	24.06	< 33.01
		1	161	19.75	19.63	22.70	23.88	< 33.01
60	2592.99	81	40	25.68	25.13	28.42	29.60	< 33.01
		1	1	25.58	24.86	28.25	29.43	< 33.01
		1	160	25.70	25.34	28.53	29.71	< 33.01
		162	0	23.80	23.14	26.49	27.67	< 33.01
		1	0	20.28	19.25	22.81	23.99	< 33.01
		1	161	20.15	19.83	23.00	24.18	< 33.01
60	2659.98	81	40	25.81	25.38	28.61	29.79	< 33.01
		1	1	25.69	25.14	28.43	29.61	< 33.01
		1	160	25.63	25.21	28.44	29.62	< 33.01
		162	0	23.76	23.40	26.59	27.77	< 33.01
		1	0	20.21	19.49	22.88	24.06	< 33.01
		1	161	20.19	20.01	23.11	24.29	< 33.01
70	2531.01	90	45	25.70	25.28	28.51	29.69	< 33.01
		1	1	25.76	25.02	28.42	29.60	< 33.01
		1	187	25.51	25.25	28.39	29.57	< 33.01
		180	0	23.76	23.24	26.52	27.70	< 33.01
		1	0	20.36	19.46	22.94	24.12	< 33.01
		1	188	20.01	19.84	22.94	24.12	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM 16QAM								
70	2592.99	90	45	25.75	25.06	28.43	29.61	< 33.01
		1	1	25.61	24.86	28.26	29.44	< 33.01
		1	187	25.75	25.26	28.52	29.70	< 33.01
		180	0	23.74	23.13	26.46	27.64	< 33.01
		1	0	20.36	19.26	22.86	24.04	< 33.01
		1	188	20.33	19.83	23.10	24.28	< 33.01
70	2655	90	45	25.67	25.16	28.43	29.61	< 33.01
		1	1	25.34	24.77	28.07	29.25	< 33.01
		1	187	25.47	25.04	28.27	29.45	< 33.01
		180	0	23.67	23.21	26.46	27.64	< 33.01
		1	0	19.94	18.93	22.47	23.65	< 33.01
		1	188	19.88	19.53	22.72	23.90	< 33.01
80	2536.02	108	54	25.80	25.36	28.60	29.78	< 33.01
		1	1	25.72	25.03	28.40	29.58	< 33.01
		1	215	25.47	25.26	28.38	29.56	< 33.01
		216	0	23.90	23.37	26.65	27.83	< 33.01
		1	0	20.52	19.47	23.04	24.22	< 33.01
		1	216	20.21	20.06	23.15	24.33	< 33.01
80	2592.99	108	54	25.64	25.09	28.38	29.56	< 33.01
		1	1	25.30	24.49	27.92	29.10	< 33.01
		1	215	25.65	25.17	28.43	29.61	< 33.01
		216	0	23.62	23.21	26.43	27.61	< 33.01
		1	0	19.99	18.92	22.50	23.68	< 33.01
		1	216	19.93	19.57	22.76	23.94	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM 16QAM								
80	2649.99	108	54	25.51	25.07	28.31	29.49	< 33.01
		1	1	25.03	24.54	27.80	28.98	< 33.01
		1	215	25.38	24.98	28.19	29.37	< 33.01
		216	0	23.48	23.12	26.31	27.49	< 33.01
		1	0	19.80	18.97	22.42	23.60	< 33.01
		1	216	19.93	19.70	22.83	24.01	< 33.01
90	2541	120	60	25.57	25.12	28.36	29.54	< 33.01
		1	1	25.56	24.68	28.15	29.33	< 33.01
		1	243	25.38	25.29	28.35	29.53	< 33.01
		243	0	23.59	23.27	26.44	27.62	< 33.01
		1	0	20.07	18.86	22.52	23.70	< 33.01
		1	244	19.77	19.62	22.71	23.89	< 33.01
90	2592.99	120	60	25.72	25.04	28.40	29.58	< 33.01
		1	1	25.42	24.48	27.99	29.17	< 33.01
		1	243	25.59	25.17	28.40	29.58	< 33.01
		243	0	23.68	23.09	26.41	27.59	< 33.01
		1	0	20.30	19.17	22.78	23.96	< 33.01
		1	244	20.41	20.06	23.25	24.43	< 33.01
90	2644.98	120	60	25.61	25.07	28.36	29.54	< 33.01
		1	1	25.18	24.69	27.95	29.13	< 33.01
		1	243	25.52	25.28	28.41	29.59	< 33.01
		243	0	23.52	23.17	26.36	27.54	< 33.01
		1	0	20.11	19.06	22.63	23.81	< 33.01
		1	244	20.21	19.84	23.04	24.22	< 33.01

Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$

Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM 16QAM								
100	2546.01	135	67	25.58	25.20	28.40	29.58	< 33.01
		1	1	25.78	24.93	28.39	29.57	< 33.01
		1	271	25.42	25.37	28.41	29.59	< 33.01
		270	0	23.63	23.42	26.54	27.72	< 33.01
		1	0	20.12	18.98	22.60	23.78	< 33.01
		1	272	19.73	19.79	22.77	23.95	< 33.01
100	2592.99	135	67	25.67	25.06	28.39	29.57	< 33.01
		1	1	25.43	24.56	28.03	29.21	< 33.01
		1	271	25.74	25.26	28.52	29.70	< 33.01
		270	0	23.67	23.05	26.38	27.56	< 33.01
		1	0	20.15	18.98	22.61	23.79	< 33.01
		1	272	20.30	19.75	23.04	24.22	< 33.01
100	2640	135	67	25.66	25.09	28.39	29.57	< 33.01
		1	1	25.31	24.43	27.90	29.08	< 33.01
		1	271	25.54	25.13	28.35	29.53	< 33.01
		270	0	23.63	23.10	26.38	27.56	< 33.01
		1	0	19.99	18.64	22.38	23.56	< 33.01
		1	272	20.25	19.86	23.07	24.25	< 33.01

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM 64QAM								
20	2506.02	25	12	23.73	23.18	26.47	27.65	< 33.01
		1	1	23.63	22.98	26.33	27.51	< 33.01
		1	49	23.59	23.01	26.32	27.50	< 33.01
		50	0	23.27	22.63	25.97	27.15	< 33.01
		1	0	20.08	19.39	22.76	23.94	< 33.01
		1	50	20.20	19.65	22.94	24.12	< 33.01
20	2592.99	25	12	23.72	23.24	26.50	27.68	< 33.01
		1	1	23.69	23.09	26.41	27.59	< 33.01
		1	49	23.73	23.23	26.50	27.68	< 33.01
		50	0	23.27	22.69	26.00	27.18	< 33.01
		1	0	20.33	19.83	23.10	24.28	< 33.01
		1	50	20.37	20.11	23.25	24.43	< 33.01
20	2679.99	25	12	23.59	23.17	26.40	27.58	< 33.01
		1	1	23.79	23.37	26.60	27.78	< 33.01
		1	49	23.53	23.20	26.38	27.56	< 33.01
		50	0	23.18	22.81	26.01	27.19	< 33.01
		1	0	20.05	19.60	22.84	24.02	< 33.01
		1	50	20.20	20.04	23.13	24.31	< 33.01
30	2511	36	18	23.85	23.19	26.54	27.72	< 33.01
		1	1	23.73	23.18	26.47	27.65	< 33.01
		1	76	23.70	23.28	26.51	27.69	< 33.01
		75	0	23.39	22.79	26.11	27.29	< 33.01
		1	0	20.41	19.78	23.12	24.30	< 33.01
		1	77	20.22	19.84	23.04	24.22	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM 64QAM								
30	2592.99	36	18	23.83	23.22	26.55	27.73	< 33.01
		1	1	23.90	23.29	26.62	27.80	< 33.01
		1	76	23.87	23.47	26.68	27.86	< 33.01
		75	0	23.28	22.87	26.09	27.27	< 33.01
		1	0	20.54	20.02	23.30	24.48	< 33.01
		1	77	20.25	19.89	23.08	24.26	< 33.01
30	2674.98	36	18	23.68	23.19	26.45	27.63	< 33.01
		1	1	23.70	23.29	26.51	27.69	< 33.01
		1	76	23.77	23.38	26.59	27.77	< 33.01
		75	0	23.26	22.80	26.05	27.23	< 33.01
		1	0	20.30	19.58	22.97	24.15	< 33.01
		1	77	20.27	19.94	23.12	24.30	< 33.01
40	2516.01	50	25	23.84	23.38	26.63	27.81	< 33.01
		1	1	23.95	23.25	26.62	27.80	< 33.01
		1	104	23.85	23.51	26.69	27.87	< 33.01
		100	0	23.41	22.81	26.13	27.31	< 33.01
		1	0	20.50	19.73	23.14	24.32	< 33.01
		1	105	20.31	19.91	23.12	24.30	< 33.01
40	2592.99	50	25	23.79	23.22	26.52	27.70	< 33.01
		1	1	23.88	23.35	26.63	27.81	< 33.01
		1	104	24.11	23.70	26.92	28.10	< 33.01
		100	0	23.33	22.84	26.10	27.28	< 33.01
		1	0	20.25	19.58	22.94	24.12	< 33.01
		1	105	20.41	19.94	23.19	24.37	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM 64QAM								
40	2670	50	25	23.39	23.06	26.24	27.42	< 33.01
		1	1	23.41	23.07	26.25	27.43	< 33.01
		1	104	23.50	23.26	26.39	27.57	< 33.01
		100	0	23.01	22.65	25.84	27.02	< 33.01
		1	0	19.97	19.49	22.75	23.93	< 33.01
		1	105	20.14	19.81	22.99	24.17	< 33.01
50	2521.02	64	32	23.66	23.27	26.48	27.66	< 33.01
		1	1	23.72	23.07	26.42	27.60	< 33.01
		1	131	23.48	23.31	26.41	27.59	< 33.01
		128	0	23.17	22.77	25.98	27.16	< 33.01
		1	0	20.30	19.48	22.92	24.10	< 33.01
		1	132	19.81	19.67	22.75	23.93	< 33.01
50	2592.99	64	32	23.68	23.08	26.40	27.58	< 33.01
		1	1	23.66	23.08	26.39	27.57	< 33.01
		1	131	23.64	23.38	26.52	27.70	< 33.01
		128	0	23.16	22.69	25.94	27.12	< 33.01
		1	0	20.52	19.66	23.12	24.30	< 33.01
		1	132	20.40	20.14	23.28	24.46	< 33.01
50	2664.99	64	32	23.49	23.18	26.35	27.53	< 33.01
		1	1	23.57	23.23	26.41	27.59	< 33.01
		1	131	23.55	23.47	26.52	27.70	< 33.01
		128	0	22.90	22.65	25.79	26.97	< 33.01
		1	0	19.95	19.30	22.65	23.83	< 33.01
		1	132	19.85	19.75	22.81	23.99	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM 64QAM								
60	2526	81	40	23.76	23.46	26.62	27.80	< 33.01
		1	1	24.04	23.11	26.61	27.79	< 33.01
		1	160	23.51	23.26	26.40	27.58	< 33.01
		162	0	23.33	22.81	26.09	27.27	< 33.01
		1	0	20.42	19.68	23.08	24.26	< 33.01
		1	161	20.10	19.89	23.01	24.19	< 33.01
60	2592.99	81	40	23.74	23.12	26.45	27.63	< 33.01
		1	1	23.73	23.14	26.46	27.64	< 33.01
		1	160	23.89	23.74	26.83	28.01	< 33.01
		162	0	23.19	22.72	25.97	27.15	< 33.01
		1	0	20.19	19.24	22.75	23.93	< 33.01
		1	161	20.36	20.14	23.26	24.44	< 33.01
60	2659.98	81	40	23.82	23.50	26.67	27.85	< 33.01
		1	1	23.73	23.25	26.51	27.69	< 33.01
		1	160	23.74	23.44	26.60	27.78	< 33.01
		162	0	23.32	23.03	26.19	27.37	< 33.01
		1	0	20.43	19.66	23.07	24.25	< 33.01
		1	161	20.42	20.21	23.33	24.51	< 33.01
70	2531.01	90	45	23.73	23.28	26.52	27.70	< 33.01
		1	1	23.96	23.16	26.59	27.77	< 33.01
		1	187	23.77	23.43	26.61	27.79	< 33.01
		180	0	23.26	22.81	26.05	27.23	< 33.01
		1	0	20.48	19.41	22.99	24.17	< 33.01
		1	188	20.30	20.13	23.23	24.41	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM 64QAM								
70	2592.99	90	45	23.74	23.15	26.47	27.65	< 33.01
		1	1	23.60	23.12	26.38	27.56	< 33.01
		1	187	23.84	23.46	26.66	27.84	< 33.01
		180	0	23.30	22.69	26.02	27.20	< 33.01
		1	0	20.59	19.40	23.05	24.23	< 33.01
		1	188	20.46	20.07	23.28	24.46	< 33.01
70	2655	90	45	23.64	23.24	26.45	27.63	< 33.01
		1	1	23.64	23.18	26.43	27.61	< 33.01
		1	187	23.59	23.20	26.41	27.59	< 33.01
		180	0	23.16	22.91	26.05	27.23	< 33.01
		1	0	20.24	19.45	22.87	24.05	< 33.01
		1	188	20.12	19.84	22.99	24.17	< 33.01
80	2536.02	108	54	23.73	23.30	26.53	27.71	< 33.01
		1	1	23.87	23.17	26.54	27.72	< 33.01
		1	215	23.61	23.40	26.52	27.70	< 33.01
		216	0	23.29	22.94	26.13	27.31	< 33.01
		1	0	20.50	19.53	23.05	24.23	< 33.01
		1	216	20.27	19.98	23.14	24.32	< 33.01
80	2592.99	108	54	23.65	23.02	26.36	27.54	< 33.01
		1	1	23.45	22.70	26.10	27.28	< 33.01
		1	215	23.62	23.24	26.44	27.62	< 33.01
		216	0	23.12	22.54	25.85	27.03	< 33.01
		1	0	20.22	19.12	22.72	23.90	< 33.01
		1	216	20.16	19.83	23.01	24.19	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM 64QAM								
80	2649.99	108	54	23.56	23.09	26.34	27.52	< 33.01
		1	1	23.02	22.75	25.90	27.08	< 33.01
		1	215	23.49	23.32	26.42	27.60	< 33.01
		216	0	23.02	22.62	25.83	27.01	< 33.01
		1	0	20.13	19.30	22.75	23.93	< 33.01
		1	216	20.22	20.12	23.18	24.36	< 33.01
90	2541	120	60	23.63	23.22	26.44	27.62	< 33.01
		1	1	23.91	23.13	26.55	27.73	< 33.01
		1	243	23.62	23.53	26.59	27.77	< 33.01
		243	0	23.17	22.72	25.96	27.14	< 33.01
		1	0	20.43	19.44	22.97	24.15	< 33.01
		1	244	20.08	19.89	23.00	24.18	< 33.01
90	2592.99	120	60	23.70	23.13	26.43	27.61	< 33.01
		1	1	23.55	22.70	26.16	27.34	< 33.01
		1	243	23.75	23.22	26.50	27.68	< 33.01
		243	0	23.25	22.54	25.92	27.10	< 33.01
		1	0	20.44	19.37	22.95	24.13	< 33.01
		1	244	20.59	20.29	23.45	24.63	< 33.01
90	2644.98	120	60	23.63	23.28	26.47	27.65	< 33.01
		1	1	23.04	22.60	25.84	27.02	< 33.01
		1	243	23.54	23.13	26.35	27.53	< 33.01
		243	0	23.03	22.63	25.84	27.02	< 33.01
		1	0	19.89	18.83	22.40	23.58	< 33.01
		1	244	20.05	19.68	22.88	24.06	< 33.01

Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$

Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM 64QAM								
100	2546.01	135	67	23.57	23.24	26.42	27.60	< 33.01
		1	1	23.78	23.04	26.44	27.62	< 33.01
		1	271	23.45	23.38	26.43	27.61	< 33.01
		270	0	23.31	22.87	26.11	27.29	< 33.01
		1	0	20.30	19.22	22.80	23.98	< 33.01
		1	272	19.78	19.95	22.88	24.06	< 33.01
100	2592.99	135	67	23.67	23.09	26.40	27.58	< 33.01
		1	1	23.68	22.82	26.28	27.46	< 33.01
		1	271	23.78	23.28	26.55	27.73	< 33.01
		270	0	23.14	22.58	25.88	27.06	< 33.01
		1	0	20.14	18.96	22.60	23.78	< 33.01
		1	272	20.52	20.13	23.34	24.52	< 33.01
100	2640	135	67	23.65	23.16	26.42	27.60	< 33.01
		1	1	23.27	22.54	25.93	27.11	< 33.01
		1	271	23.79	23.47	26.64	27.82	< 33.01
		270	0	23.18	22.61	25.91	27.09	< 33.01
		1	0	20.11	18.83	22.53	23.71	< 33.01
		1	272	20.12	19.77	22.96	24.14	< 33.01

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM 256QAM								
20	2506.02	25	12	21.38	20.69	24.06	25.24	< 33.01
		1	1	21.31	20.56	23.96	25.14	< 33.01
		1	49	21.25	20.67	23.98	25.16	< 33.01
		50	0	21.25	20.58	23.94	25.12	< 33.01
		1	0	20.20	19.45	22.85	24.03	< 33.01
		1	50	20.31	19.78	23.06	24.24	< 33.01
20	2592.99	25	12	21.25	20.81	24.05	25.23	< 33.01
		1	1	21.06	20.52	23.81	24.99	< 33.01
		1	49	21.11	20.70	23.92	25.10	< 33.01
		50	0	21.18	20.85	24.03	25.21	< 33.01
		1	0	20.12	19.53	22.85	24.03	< 33.01
		1	50	20.13	19.68	22.92	24.10	< 33.01
20	2679.99	25	12	21.16	20.92	24.05	25.23	< 33.01
		1	1	21.24	20.93	24.10	25.28	< 33.01
		1	49	21.18	20.99	24.10	25.28	< 33.01
		50	0	21.18	20.80	24.00	25.18	< 33.01
		1	0	20.16	19.72	22.96	24.14	< 33.01
		1	50	20.15	19.93	23.05	24.23	< 33.01
30	2511	36	18	21.25	20.67	23.98	25.16	< 33.01
		1	1	21.42	20.69	24.08	25.26	< 33.01
		1	76	21.19	20.67	23.95	25.13	< 33.01
		75	0	21.36	20.75	24.08	25.26	< 33.01
		1	0	20.25	19.44	22.87	24.05	< 33.01
		1	77	20.28	19.96	23.13	24.31	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM 256QAM								
30	2592.99	36	18	21.19	20.85	24.03	25.21	< 33.01
		1	1	21.19	20.83	24.02	25.20	< 33.01
		1	76	21.25	20.92	24.10	25.28	< 33.01
		75	0	21.26	20.88	24.08	25.26	< 33.01
		1	0	20.30	19.75	23.04	24.22	< 33.01
		1	77	20.40	20.08	23.25	24.43	< 33.01
30	2674.98	36	18	21.17	20.75	23.98	25.16	< 33.01
		1	1	21.31	20.84	24.09	25.27	< 33.01
		1	76	21.16	20.89	24.04	25.22	< 33.01
		75	0	21.27	20.81	24.06	25.24	< 33.01
		1	0	20.20	19.58	22.91	24.09	< 33.01
		1	77	20.34	20.10	23.23	24.41	< 33.01
40	2516.01	50	25	21.33	20.72	24.05	25.23	< 33.01
		1	1	21.53	20.91	24.24	25.42	< 33.01
		1	104	21.45	21.07	24.27	25.45	< 33.01
		100	0	21.39	20.87	24.15	25.33	< 33.01
		1	0	20.44	19.73	23.11	24.29	< 33.01
		1	105	20.40	19.94	23.19	24.37	< 33.01
40	2592.99	50	25	21.25	20.90	24.09	25.27	< 33.01
		1	1	21.37	20.94	24.17	25.35	< 33.01
		1	104	21.34	20.97	24.17	25.35	< 33.01
		100	0	21.35	21.00	24.19	25.37	< 33.01
		1	0	20.38	19.66	23.05	24.23	< 33.01
		1	105	20.61	20.22	23.43	24.61	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM 256QAM								
40	2670	50	25	20.89	20.55	23.73	24.91	< 33.01
		1	1	21.03	20.61	23.84	25.02	< 33.01
		1	104	21.09	20.89	24.00	25.18	< 33.01
		100	0	20.95	20.71	23.84	25.02	< 33.01
		1	0	20.12	19.67	22.91	24.09	< 33.01
		1	105	19.94	19.82	22.89	24.07	< 33.01
50	2521.02	64	32	21.18	20.66	23.94	25.12	< 33.01
		1	1	21.26	20.65	23.98	25.16	< 33.01
		1	131	20.96	20.84	23.91	25.09	< 33.01
		128	0	21.18	20.69	23.95	25.13	< 33.01
		1	0	20.45	19.61	23.06	24.24	< 33.01
		1	132	19.83	19.70	22.78	23.96	< 33.01
50	2592.99	64	32	21.20	20.63	23.93	25.11	< 33.01
		1	1	21.09	20.52	23.82	25.00	< 33.01
		1	131	21.11	20.90	24.02	25.20	< 33.01
		128	0	21.23	20.63	23.95	25.13	< 33.01
		1	0	20.19	19.41	22.83	24.01	< 33.01
		1	132	20.11	19.87	23.00	24.18	< 33.01
50	2664.99	64	32	20.93	20.73	23.84	25.02	< 33.01
		1	1	20.98	20.76	23.88	25.06	< 33.01
		1	131	20.98	20.84	23.92	25.10	< 33.01
		128	0	20.94	20.71	23.84	25.02	< 33.01
		1	0	20.13	19.72	22.94	24.12	< 33.01
		1	132	20.03	19.92	22.99	24.17	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM 256QAM								
60	2526	81	40	21.28	20.87	24.09	25.27	< 33.01
		1	1	21.53	20.74	24.16	25.34	< 33.01
		1	160	21.16	20.99	24.09	25.27	< 33.01
		162	0	21.28	20.89	24.10	25.28	< 33.01
		1	0	20.45	19.68	23.09	24.27	< 33.01
		1	161	20.04	19.93	23.00	24.18	< 33.01
60	2592.99	81	40	21.22	20.59	23.93	25.11	< 33.01
		1	1	21.18	20.63	23.92	25.10	< 33.01
		1	160	21.13	20.80	23.98	25.16	< 33.01
		162	0	21.25	20.72	24.00	25.18	< 33.01
		1	0	20.39	19.51	22.98	24.16	< 33.01
		1	161	20.18	19.82	23.01	24.19	< 33.01
60	2659.98	81	40	21.30	20.88	24.11	25.29	< 33.01
		1	1	21.25	20.68	23.98	25.16	< 33.01
		1	160	21.28	20.99	24.15	25.33	< 33.01
		162	0	21.28	21.01	24.16	25.34	< 33.01
		1	0	20.32	19.52	22.95	24.13	< 33.01
		1	161	20.15	19.89	23.03	24.21	< 33.01
70	2531.01	90	45	21.20	20.73	23.98	25.16	< 33.01
		1	1	21.19	20.42	23.83	25.01	< 33.01
		1	187	20.92	20.59	23.77	24.95	< 33.01
		180	0	21.31	20.78	24.06	25.24	< 33.01
		1	0	20.48	19.46	23.01	24.19	< 33.01
		1	188	20.12	19.82	22.98	24.16	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM 256QAM								
70	2592.99	90	45	21.29	20.66	24.00	25.18	< 33.01
		1	1	21.29	20.54	23.94	25.12	< 33.01
		1	187	21.11	20.70	23.92	25.10	< 33.01
		180	0	21.27	20.62	23.97	25.15	< 33.01
		1	0	20.31	19.31	22.85	24.03	< 33.01
		1	188	20.26	19.83	23.06	24.24	< 33.01
70	2655	90	45	21.19	20.81	24.01	25.19	< 33.01
		1	1	20.98	20.52	23.77	24.95	< 33.01
		1	187	21.12	20.68	23.92	25.10	< 33.01
		180	0	21.15	20.73	23.96	25.14	< 33.01
		1	0	20.17	19.36	22.79	23.97	< 33.01
		1	188	20.10	19.76	22.94	24.12	< 33.01
80	2536.02	108	54	21.09	20.62	23.87	25.05	< 33.01
		1	1	21.28	20.61	23.97	25.15	< 33.01
		1	215	20.96	20.72	23.85	25.03	< 33.01
		216	0	21.25	20.63	23.96	25.14	< 33.01
		1	0	20.19	19.28	22.77	23.95	< 33.01
		1	216	20.06	19.86	22.97	24.15	< 33.01
80	2592.99	108	54	21.06	20.54	23.82	25.00	< 33.01
		1	1	21.03	20.26	23.67	24.85	< 33.01
		1	215	21.06	20.67	23.88	25.06	< 33.01
		216	0	21.08	20.47	23.80	24.98	< 33.01
		1	0	20.14	19.08	22.65	23.83	< 33.01
		1	216	20.12	19.82	22.98	24.16	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM 256QAM								
80	2649.99	108	54	21.07	20.69	23.89	25.07	< 33.01
		1	1	20.59	20.12	23.37	24.55	< 33.01
		1	215	21.10	20.84	23.98	25.16	< 33.01
		216	0	20.95	20.73	23.85	25.03	< 33.01
		1	0	19.81	19.00	22.43	23.61	< 33.01
		1	216	19.89	19.68	22.80	23.98	< 33.01
90	2541	120	60	21.08	20.67	23.89	25.07	< 33.01
		1	1	21.37	20.64	24.03	25.21	< 33.01
		1	243	21.12	21.03	24.09	25.27	< 33.01
		243	0	21.09	20.76	23.94	25.12	< 33.01
		1	0	20.29	19.26	22.82	24.00	< 33.01
		1	244	19.98	19.99	23.00	24.18	< 33.01
90	2592.99	120	60	21.20	20.57	23.91	25.09	< 33.01
		1	1	20.99	20.08	23.57	24.75	< 33.01
		1	243	21.16	20.84	24.01	25.19	< 33.01
		243	0	21.16	20.72	23.96	25.14	< 33.01
		1	0	20.26	19.19	22.77	23.95	< 33.01
		1	244	20.28	19.94	23.12	24.30	< 33.01
90	2644.98	120	60	21.13	20.63	23.90	25.08	< 33.01
		1	1	20.50	19.95	23.24	24.42	< 33.01
		1	243	20.91	20.51	23.72	24.90	< 33.01
		243	0	21.09	20.57	23.85	25.03	< 33.01
		1	0	20.00	19.03	22.55	23.73	< 33.01
		1	244	20.10	19.85	22.99	24.17	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM 256QAM								
100	2546.01	135	67	21.17	20.76	23.98	25.16	< 33.01
		1	1	21.28	20.52	23.93	25.11	< 33.01
		1	271	21.00	21.14	24.08	25.26	< 33.01
		270	0	21.14	20.77	23.97	25.15	< 33.01
		1	0	20.18	19.02	22.65	23.83	< 33.01
		1	272	19.86	19.98	22.93	24.11	< 33.01
100	2592.99	135	67	21.18	20.65	23.93	25.11	< 33.01
		1	1	20.89	20.17	23.56	24.74	< 33.01
		1	271	21.27	20.78	24.04	25.22	< 33.01
		270	0	21.16	20.56	23.88	25.06	< 33.01
		1	0	20.35	19.16	22.81	23.99	< 33.01
		1	272	20.42	20.06	23.25	24.43	< 33.01
100	2640	135	67	21.21	20.74	23.99	25.17	< 33.01
		1	1	20.94	20.12	23.56	24.74	< 33.01
		1	271	21.41	20.98	24.21	25.39	< 33.01
		270	0	21.12	20.58	23.87	25.05	< 33.01
		1	0	20.35	18.98	22.73	23.91	< 33.01
		1	272	20.37	20.04	23.22	24.40	< 33.01

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
CP OFDM QPSK								
20	2506.02	25	12	25.27	24.67	27.99	29.17	< 33.01
		1	1	25.18	24.53	27.88	29.06	< 33.01
		1	49	25.14	24.54	27.86	29.04	< 33.01
		51	0	22.78	22.18	25.50	26.68	< 33.01
		1	0	20.19	19.49	22.86	24.04	< 33.01
		1	50	20.26	19.74	23.02	24.20	< 33.01
20	2592.99	25	12	25.13	24.68	27.92	29.10	< 33.01
		1	1	25.21	24.60	27.93	29.11	< 33.01
		1	49	25.26	24.74	28.02	29.20	< 33.01
		51	0	22.65	22.24	25.46	26.64	< 33.01
		1	0	20.41	19.84	23.14	24.32	< 33.01
		1	50	20.34	20.04	23.20	24.38	< 33.01
20	2679.99	25	12	25.14	24.64	27.91	29.09	< 33.01
		1	1	25.22	24.76	28.01	29.19	< 33.01
		1	49	25.18	24.93	28.07	29.25	< 33.01
		51	0	22.71	22.26	25.50	26.68	< 33.01
		1	0	20.22	19.82	23.03	24.21	< 33.01
		1	50	20.32	20.13	23.24	24.42	< 33.01
30	2511	39	19	25.28	24.57	27.95	29.13	< 33.01
		1	1	25.44	24.63	28.06	29.24	< 33.01
		1	76	25.48	24.73	28.13	29.31	< 33.01
		78	0	22.81	22.26	25.55	26.73	< 33.01
		1	0	20.47	19.72	23.12	24.30	< 33.01
		1	77	20.41	19.96	23.20	24.38	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
CP OFDM QPSK								
30	2592.99	39	19	25.19	24.65	27.94	29.12	< 33.01
		1	1	25.36	24.76	28.08	29.26	< 33.01
		1	76	25.43	25.19	28.32	29.50	< 33.01
		78	0	22.73	22.27	25.52	26.70	< 33.01
		1	0	20.29	19.96	23.14	24.32	< 33.01
		1	77	20.47	20.30	23.40	24.58	< 33.01
30	2674.98	39	19	25.23	24.67	27.97	29.15	< 33.01
		1	1	25.24	24.64	27.96	29.14	< 33.01
		1	76	25.30	25.27	28.30	29.48	< 33.01
		78	0	22.79	22.25	25.54	26.72	< 33.01
		1	0	20.35	19.78	23.08	24.26	< 33.01
		1	77	20.34	20.03	23.20	24.38	< 33.01
40	2516.01	53	26	25.24	24.74	28.01	29.19	< 33.01
		1	1	25.31	24.58	27.97	29.15	< 33.01
		1	104	25.23	24.79	28.03	29.21	< 33.01
		106	0	22.83	22.30	25.58	26.76	< 33.01
		1	0	20.50	19.79	23.17	24.35	< 33.01
		1	105	20.52	20.21	23.38	24.56	< 33.01
40	2592.99	53	26	24.91	24.53	27.73	28.91	< 33.01
		1	1	25.10	24.68	27.91	29.09	< 33.01
		1	104	25.03	24.65	27.85	29.03	< 33.01
		106	0	22.52	22.04	25.30	26.48	< 33.01
		1	0	20.30	19.80	23.07	24.25	< 33.01
		1	105	20.24	19.99	23.13	24.31	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
CP OFDM QPSK								
40	2670	53	26	24.84	24.54	27.70	28.88	< 33.01
		1	1	25.04	24.57	27.82	29.00	< 33.01
		1	104	25.05	24.72	27.90	29.08	< 33.01
		106	0	22.41	22.13	25.28	26.46	< 33.01
		1	0	19.99	19.62	22.82	24.00	< 33.01
		1	105	20.15	19.86	23.02	24.20	< 33.01
50	2521.02	67	33	25.07	24.73	27.91	29.09	< 33.01
		1	1	25.28	24.54	27.94	29.12	< 33.01
		1	131	25.10	24.84	27.98	29.16	< 33.01
		133	0	22.68	22.23	25.47	26.65	< 33.01
		1	0	20.37	19.81	23.11	24.29	< 33.01
		1	132	20.01	19.84	22.94	24.12	< 33.01
50	2592.99	67	33	25.13	24.48	27.83	29.01	< 33.01
		1	1	24.84	24.32	27.60	28.78	< 33.01
		1	131	25.01	24.73	27.88	29.06	< 33.01
		133	0	22.59	22.02	25.32	26.50	< 33.01
		1	0	20.35	19.55	22.98	24.16	< 33.01
		1	132	20.25	19.94	23.11	24.29	< 33.01
50	2664.99	67	33	24.91	24.55	27.74	28.92	< 33.01
		1	1	25.01	24.59	27.82	29.00	< 33.01
		1	131	25.02	24.76	27.90	29.08	< 33.01
		133	0	22.48	22.18	25.34	26.52	< 33.01
		1	0	20.23	19.68	22.97	24.15	< 33.01
		1	132	20.08	19.84	22.97	24.15	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
CP OFDM QPSK								
60	2526	81	40	25.24	24.82	28.05	29.23	< 33.01
		1	1	25.42	24.58	28.03	29.21	< 33.01
		1	160	25.14	24.92	28.04	29.22	< 33.01
		162	0	22.78	22.32	25.57	26.75	< 33.01
		1	0	20.53	19.65	23.12	24.30	< 33.01
		1	161	20.22	20.02	23.13	24.31	< 33.01
60	2592.99	81	40	25.27	24.59	27.95	29.13	< 33.01
		1	1	25.25	24.63	27.96	29.14	< 33.01
		1	160	25.34	24.96	28.16	29.34	< 33.01
		162	0	22.82	22.17	25.52	26.70	< 33.01
		1	0	20.60	19.56	23.12	24.30	< 33.01
		1	161	20.42	19.97	23.21	24.39	< 33.01
60	2659.98	81	40	25.16	24.71	27.95	29.13	< 33.01
		1	1	25.05	24.79	27.93	29.11	< 33.01
		1	160	25.12	24.85	28.00	29.18	< 33.01
		162	0	22.68	22.30	25.50	26.68	< 33.01
		1	0	20.29	19.52	22.93	24.11	< 33.01
		1	161	20.25	19.97	23.12	24.30	< 33.01
70	2531.01	95	47	25.26	24.74	28.02	29.20	< 33.01
		1	1	25.30	24.46	27.91	29.09	< 33.01
		1	187	25.46	24.93	28.21	29.39	< 33.01
		189	0	22.73	22.33	25.54	26.72	< 33.01
		1	0	20.53	19.86	23.22	24.40	< 33.01
		1	188	20.17	19.86	23.03	24.21	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
CP OFDM QPSK								
70	2592.99	95	47	25.17	24.56	27.89	29.07	< 33.01
		1	1	25.21	24.51	27.88	29.06	< 33.01
		1	187	25.28	25.25	28.28	29.46	< 33.01
		189	0	22.71	22.16	25.45	26.63	< 33.01
		1	0	20.36	19.51	22.97	24.15	< 33.01
		1	188	20.38	19.83	23.12	24.30	< 33.01
70	2655	95	47	25.29	24.67	28.00	29.18	< 33.01
		1	1	25.19	24.45	27.85	29.03	< 33.01
		1	187	25.32	25.09	28.22	29.40	< 33.01
		189	0	22.73	22.20	25.48	26.66	< 33.01
		1	0	20.32	19.73	23.05	24.23	< 33.01
		1	188	20.31	19.89	23.12	24.30	< 33.01
80	2536.02	109	54	25.28	24.87	28.09	29.27	< 33.01
		1	1	25.39	24.65	28.05	29.23	< 33.01
		1	215	25.32	25.19	28.27	29.45	< 33.01
		217	0	22.75	22.37	25.57	26.75	< 33.01
		1	0	20.68	19.62	23.19	24.37	< 33.01
		1	216	20.35	20.17	23.27	24.45	< 33.01
80	2592.99	109	54	25.10	24.47	27.81	28.99	< 33.01
		1	1	25.07	24.13	27.64	28.82	< 33.01
		1	215	25.36	24.95	28.17	29.35	< 33.01
		217	0	22.65	22.05	25.37	26.55	< 33.01
		1	0	20.23	19.24	22.77	23.95	< 33.01
		1	216	20.28	19.91	23.11	24.29	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
CP OFDM QPSK								
80	2649.99	109	54	24.99	24.51	27.77	28.95	< 33.01
		1	1	24.73	24.25	27.51	28.69	< 33.01
		1	215	25.17	24.79	28.00	29.18	< 33.01
		217	0	22.51	22.09	25.32	26.50	< 33.01
		1	0	20.04	19.22	22.66	23.84	< 33.01
		1	216	20.18	19.88	23.04	24.22	< 33.01
90	2541	123	61	25.04	24.61	27.84	29.02	< 33.01
		1	1	25.32	24.56	27.97	29.15	< 33.01
		1	243	24.95	24.67	27.82	29.00	< 33.01
		245	0	22.60	22.18	25.41	26.59	< 33.01
		1	0	20.40	19.37	22.93	24.11	< 33.01
		1	244	20.00	19.89	22.96	24.14	< 33.01
90	2592.99	123	61	25.18	24.50	27.86	29.04	< 33.01
		1	1	25.09	24.25	27.70	28.88	< 33.01
		1	243	25.34	24.98	28.17	29.35	< 33.01
		245	0	22.63	22.12	25.39	26.57	< 33.01
		1	0	20.28	19.22	22.79	23.97	< 33.01
		1	244	20.53	20.09	23.33	24.51	< 33.01
90	2644.98	123	61	25.03	24.61	27.84	29.02	< 33.01
		1	1	24.74	24.11	27.45	28.63	< 33.01
		1	243	25.07	24.74	27.92	29.10	< 33.01
		245	0	22.54	22.17	25.37	26.55	< 33.01
		1	0	20.13	19.09	22.65	23.83	< 33.01
		1	244	20.29	19.86	23.09	24.27	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
CP OFDM QPSK								
100	2546.01	137	68	25.07	24.70	27.90	29.08	< 33.01
		1	1	25.40	24.65	28.05	29.23	< 33.01
		1	271	24.96	24.86	27.92	29.10	< 33.01
		273	0	22.67	22.21	25.46	26.64	< 33.01
		1	0	20.45	19.41	22.97	24.15	< 33.01
		1	272	20.12	20.14	23.14	24.32	< 33.01
100	2592.99	137	68	25.14	24.48	27.83	29.01	< 33.01
		1	1	25.12	24.16	27.68	28.86	< 33.01
		1	271	25.52	24.85	28.21	29.39	< 33.01
		273	0	22.71	22.12	25.44	26.62	< 33.01
		1	0	20.40	19.28	22.89	24.07	< 33.01
		1	272	20.50	19.96	23.25	24.43	< 33.01
100	2640	137	68	25.17	24.57	27.89	29.07	< 33.01
		1	1	25.00	24.24	27.65	28.83	< 33.01
		1	271	25.27	24.86	28.08	29.26	< 33.01
		273	0	22.63	22.13	25.40	26.58	< 33.01
		1	0	20.39	19.08	22.79	23.97	< 33.01
		1	272	20.42	19.96	23.21	24.39	< 33.01

Test Site	WZ-SR6	Test Engineer	Cloud Guo
Test Date	2023/04/03 ~ 2023/04/08	Test Band	n77/n78_UL MIMO (3450 ~ 3550MHz)

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM PI/2 BPSK								
10	3455.01	12	6	25.43	24.63	28.06	28.64	< 30.00
		1	1	25.36	24.62	28.02	28.60	< 30.00
		1	22	25.32	24.57	27.97	28.55	< 30.00
		24	0	23.97	23.24	26.63	27.21	< 30.00
		1	0	19.54	18.86	22.22	22.80	< 30.00
		1	23	19.53	18.88	22.23	22.81	< 30.00
10	3500.01	12	6	25.44	24.68	28.09	28.67	< 30.00
		1	1	24.39	24.89	27.66	28.24	< 30.00
		1	22	25.42	24.68	28.08	28.66	< 30.00
		24	0	24.01	23.24	26.65	27.23	< 30.00
		1	0	19.57	18.84	22.23	22.81	< 30.00
		1	23	19.45	18.73	22.12	22.70	< 30.00
10	3544.98	12	6	25.47	24.76	28.14	28.72	< 30.00
		1	1	25.46	24.64	28.08	28.66	< 30.00
		1	22	25.32	24.60	27.99	28.57	< 30.00
		24	0	23.89	23.22	26.58	27.16	< 30.00
		1	0	19.52	18.75	22.16	22.74	< 30.00
		1	23	19.52	18.73	22.15	22.73	< 30.00
15	3457.50	18	9	25.73	24.91	28.35	28.93	< 30.00
		1	1	25.72	24.91	28.34	28.92	< 30.00
		1	36	25.76	24.90	28.36	28.94	< 30.00
		36	0	24.25	23.45	26.88	27.46	< 30.00
		1	0	19.78	19.03	22.43	23.01	< 30.00
		1	37	19.84	19.06	22.48	23.06	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{\text{Port 0 Output Power} / 10} + 10^{\text{Port 1 Output Power} / 10}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM PI/2 BPSK								
15	3500.01	18	9	25.70	24.97	28.36	28.94	< 30.00
		1	1	25.72	24.94	28.36	28.94	< 30.00
		1	36	25.65	24.92	28.31	28.89	< 30.00
		36	0	24.27	23.46	26.89	27.47	< 30.00
		1	0	19.86	19.04	22.48	23.06	< 30.00
		1	37	19.80	19.01	22.43	23.01	< 30.00
15	3542.49	18	9	25.72	24.91	28.34	28.92	< 30.00
		1	1	25.72	24.89	28.34	28.92	< 30.00
		1	36	25.73	24.83	28.31	28.89	< 30.00
		36	0	24.27	23.46	26.89	27.47	< 30.00
		1	0	19.85	19.10	22.50	23.08	< 30.00
		1	37	19.85	18.90	22.41	22.99	< 30.00
20	3460.02	25	12	25.93	25.07	28.53	29.11	< 30.00
		1	1	25.84	25.06	28.48	29.06	< 30.00
		1	49	25.90	25.02	28.49	29.07	< 30.00
		50	0	24.48	23.62	27.08	27.66	< 30.00
		1	0	19.96	19.15	22.58	23.16	< 30.00
		1	50	20.01	19.13	22.60	23.18	< 30.00
20	3500.01	25	12	25.83	25.11	28.50	29.08	< 30.00
		1	1	25.84	25.13	28.51	29.09	< 30.00
		1	49	25.74	25.05	28.42	29.00	< 30.00
		50	0	23.90	23.18	26.57	27.15	< 30.00
		1	0	19.52	18.71	22.14	22.72	< 30.00
		1	50	19.32	18.57	21.97	22.55	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM PI/2 BPSK								
20	3540.00	25	12	25.87	25.08	28.50	29.08	< 30.00
		1	1	25.83	25.09	28.49	29.07	< 30.00
		1	49	25.83	24.99	28.44	29.02	< 30.00
		50	0	24.41	23.64	27.05	27.63	< 30.00
		1	0	20.04	19.19	22.65	23.23	< 30.00
		1	50	19.88	19.09	22.51	23.09	< 30.00
30	3465.00	36	18	25.91	25.17	28.57	29.15	< 30.00
		1	1	25.89	25.13	28.54	29.12	< 30.00
		1	76	25.82	25.13	28.50	29.08	< 30.00
		75	0	24.55	23.79	27.20	27.78	< 30.00
		1	0	20.09	19.39	22.76	23.34	< 30.00
		1	77	20.06	19.28	22.70	23.28	< 30.00
30	3500.01	36	18	25.88	25.19	28.56	29.14	< 30.00
		1	1	26.05	25.21	28.66	29.24	< 30.00
		1	76	25.82	25.13	28.50	29.08	< 30.00
		75	0	24.49	23.72	27.13	27.71	< 30.00
		1	0	20.16	19.30	22.76	23.34	< 30.00
		1	77	19.90	19.31	22.63	23.21	< 30.00
30	3534.99	36	18	25.82	25.08	28.48	29.06	< 30.00
		1	1	25.86	25.24	28.57	29.15	< 30.00
		1	76	25.77	25.06	28.44	29.02	< 30.00
		75	0	24.44	23.74	27.11	27.69	< 30.00
		1	0	19.86	19.43	22.66	23.24	< 30.00
		1	77	19.95	19.25	22.62	23.20	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM PI/2 BPSK								
40	3470.01	50	25	25.98	25.24	28.64	29.22	< 30.00
		1	1	25.92	25.28	28.62	29.20	< 30.00
		1	104	25.87	25.26	28.59	29.17	< 30.00
		100	0	24.53	23.83	27.20	27.78	< 30.00
		1	0	20.05	19.54	22.81	23.39	< 30.00
		1	105	20.01	19.38	22.72	23.30	< 30.00
40	3500.01	50	25	25.92	25.20	28.59	29.17	< 30.00
		1	1	26.07	25.18	28.66	29.24	< 30.00
		1	104	25.83	25.11	28.50	29.08	< 30.00
		100	0	24.50	23.84	27.19	27.77	< 30.00
		1	0	20.23	19.53	22.90	23.48	< 30.00
		1	105	20.05	19.32	22.71	23.29	< 30.00
40	3529.98	50	25	25.84	25.14	28.51	29.09	< 30.00
		1	1	25.93	25.24	28.61	29.19	< 30.00
		1	104	25.83	25.14	28.51	29.09	< 30.00
		100	0	24.43	23.73	27.10	27.68	< 30.00
		1	0	20.09	19.48	22.81	23.39	< 30.00
		1	105	19.99	19.26	22.65	23.23	< 30.00
50	3475.02	64	32	25.78	25.04	28.44	29.02	< 30.00
		1	1	25.78	25.10	28.46	29.04	< 30.00
		1	131	25.52	24.79	28.18	28.76	< 30.00
		128	0	24.30	23.56	26.96	27.54	< 30.00
		1	0	19.90	19.23	22.59	23.17	< 30.00
		1	132	19.56	18.88	22.24	22.82	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM PI/2 BPSK								
50	3500.01	64	32	25.81	24.94	28.41	28.99	< 30.00
		1	1	25.97	25.15	28.59	29.17	< 30.00
		1	131	25.53	24.72	28.15	28.73	< 30.00
		128	0	24.31	23.46	26.92	27.50	< 30.00
		1	0	20.12	19.21	22.70	23.28	< 30.00
		1	132	19.64	18.87	22.28	22.86	< 30.00
50	3525.00	64	32	25.75	24.88	28.35	28.93	< 30.00
		1	1	25.77	24.91	28.37	28.95	< 30.00
		1	131	25.51	24.62	28.10	28.68	< 30.00
		128	0	24.28	23.45	26.90	27.48	< 30.00
		1	0	19.98	19.18	22.61	23.19	< 30.00
		1	132	19.70	18.85	22.31	22.89	< 30.00
60	3480.00	81	40	25.70	24.73	28.25	28.83	< 30.00
		1	1	25.69	24.79	28.27	28.85	< 30.00
		1	160	25.29	24.51	27.93	28.51	< 30.00
		162	0	24.08	23.29	26.71	27.29	< 30.00
		1	0	19.65	18.93	22.32	22.90	< 30.00
		1	161	19.46	18.75	22.13	22.71	< 30.00
60	3500.01	81	40	25.64	24.81	28.26	28.84	< 30.00
		1	1	25.84	24.90	28.41	28.99	< 30.00
		1	160	25.40	24.60	28.03	28.61	< 30.00
		162	0	24.17	23.29	26.76	27.34	< 30.00
		1	0	19.86	18.96	22.44	23.02	< 30.00
		1	161	19.47	18.71	22.12	22.70	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM PI/2 BPSK								
60	3519.99	81	40	25.68	24.79	28.27	28.85	< 30.00
		1	1	25.80	24.79	28.33	28.91	< 30.00
		1	160	25.42	24.47	27.98	28.56	< 30.00
		162	0	24.14	23.27	26.74	27.32	< 30.00
		1	0	19.85	18.79	22.36	22.94	< 30.00
		1	161	19.46	18.59	22.06	22.64	< 30.00
70	3485.01	90	45	25.52	24.63	28.11	28.69	< 30.00
		1	1	25.67	24.85	28.29	28.87	< 30.00
		1	187	25.29	24.55	27.95	28.53	< 30.00
		180	0	24.10	23.27	26.72	27.30	< 30.00
		1	0	19.68	19.14	22.43	23.01	< 30.00
		1	188	19.24	18.53	21.91	22.49	< 30.00
70	3500.01	90	45	25.56	24.71	28.17	28.75	< 30.00
		1	1	25.73	24.86	28.33	28.91	< 30.00
		1	187	25.28	24.49	27.91	28.49	< 30.00
		180	0	24.07	23.27	26.70	27.28	< 30.00
		1	0	19.77	19.04	22.43	23.01	< 30.00
		1	188	19.23	18.55	21.91	22.49	< 30.00
70	3514.98	90	45	25.53	24.69	28.14	28.72	< 30.00
		1	1	25.71	24.84	28.31	28.89	< 30.00
		1	187	25.23	24.40	27.85	28.43	< 30.00
		180	0	24.05	23.23	26.67	27.25	< 30.00
		1	0	19.78	18.96	22.40	22.98	< 30.00
		1	188	19.36	18.51	21.97	22.55	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM PI/2 BPSK								
80	3490.02	108	54	25.66	24.72	28.23	28.81	< 30.00
		1	1	25.64	24.77	28.24	28.82	< 30.00
		1	215	25.31	24.52	27.94	28.52	< 30.00
		216	0	24.01	23.29	26.68	27.26	< 30.00
		1	0	19.67	19.09	22.40	22.98	< 30.00
		1	216	19.36	18.58	22.00	22.58	< 30.00
80	3500.01	108	54	25.58	24.78	28.21	28.79	< 30.00
		1	1	25.74	24.90	28.35	28.93	< 30.00
		1	215	25.32	24.50	27.94	28.52	< 30.00
		216	0	24.15	23.27	26.74	27.32	< 30.00
		1	0	19.82	19.02	22.45	23.03	< 30.00
		1	216	19.33	18.60	21.99	22.57	< 30.00
80	3510.00	108	54	25.57	24.74	28.19	28.77	< 30.00
		1	1	25.76	24.75	28.29	28.87	< 30.00
		1	215	25.32	24.50	27.94	28.52	< 30.00
		216	0	24.06	23.25	26.68	27.26	< 30.00
		1	0	19.88	18.87	22.41	22.99	< 30.00
		1	216	19.27	18.51	21.92	22.50	< 30.00
90	3495.00	120	60	25.58	24.75	28.20	28.78	< 30.00
		1	1	25.67	24.73	28.24	28.82	< 30.00
		1	243	25.34	24.54	27.97	28.55	< 30.00
		243	0	24.09	23.31	26.73	27.31	< 30.00
		1	0	19.64	19.05	22.37	22.95	< 30.00
		1	244	19.37	18.64	22.03	22.61	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM PI/2 BPSK								
90	3500.01	120	60	25.57	24.88	28.25	28.83	< 30.00
		1	1	25.69	24.91	28.33	28.91	< 30.00
		1	243	25.41	24.58	28.03	28.61	< 30.00
		243	0	24.12	23.36	26.77	27.35	< 30.00
		1	0	19.74	19.02	22.41	22.99	< 30.00
		1	244	19.30	18.73	22.03	22.61	< 30.00
90	3504.99	120	60	25.61	24.84	28.25	28.83	< 30.00
		1	1	25.85	24.97	28.44	29.02	< 30.00
		1	243	25.41	24.55	28.01	28.59	< 30.00
		243	0	24.18	23.32	26.78	27.36	< 30.00
		1	0	19.94	19.07	22.54	23.12	< 30.00
		1	244	19.44	18.69	22.09	22.67	< 30.00
100	3500.01	135	67	25.57	24.82	28.22	28.80	< 30.00
		1	1	25.65	24.95	28.32	28.90	< 30.00
		1	271	25.45	24.65	28.08	28.66	< 30.00
		270	0	24.11	23.34	26.75	27.33	< 30.00
		1	0	19.68	19.03	22.38	22.96	< 30.00
		1	272	19.43	18.62	22.05	22.63	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{\text{Port 0 Output Power} / 10} + 10^{\text{Port 1 Output Power} / 10}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM QPSK								
10	3455.01	12	6	25.41	24.63	28.05	28.63	< 30.00
		1	1	25.39	24.57	28.01	28.59	< 30.00
		1	22	25.32	24.60	27.99	28.57	< 30.00
		24	0	23.40	22.75	26.10	26.68	< 30.00
		1	0	18.94	18.23	21.61	22.19	< 30.00
		1	23	18.95	18.22	21.61	22.19	< 30.00
10	3500.01	12	6	25.46	24.66	28.09	28.67	< 30.00
		1	1	25.41	24.66	28.06	28.64	< 30.00
		1	22	24.37	24.67	27.53	28.11	< 30.00
		24	0	23.52	22.72	26.15	26.73	< 30.00
		1	0	18.98	18.26	21.65	22.23	< 30.00
		1	23	18.90	18.20	21.57	22.15	< 30.00
10	3544.98	12	6	25.46	24.59	28.06	28.64	< 30.00
		1	1	25.41	24.62	28.04	28.62	< 30.00
		1	22	24.35	24.63	27.50	28.08	< 30.00
		24	0	23.39	22.71	26.07	26.65	< 30.00
		1	0	19.05	18.24	21.67	22.25	< 30.00
		1	23	18.95	18.27	21.63	22.21	< 30.00
15	3457.50	18	9	25.74	24.87	28.34	28.92	< 30.00
		1	1	25.73	24.87	28.33	28.91	< 30.00
		1	36	25.77	24.82	28.33	28.91	< 30.00
		36	0	23.75	22.95	26.38	26.96	< 30.00
		1	0	19.26	18.52	21.92	22.50	< 30.00
		1	37	19.32	18.44	21.91	22.49	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM QPSK								
15	3500.01	18	9	25.71	24.96	28.36	28.94	< 30.00
		1	1	25.77	24.94	28.39	28.97	< 30.00
		1	36	25.74	24.95	28.37	28.95	< 30.00
		36	0	23.76	22.95	26.38	26.96	< 30.00
		1	0	19.36	18.51	21.97	22.55	< 30.00
		1	37	19.19	18.43	21.84	22.42	< 30.00
15	3542.49	18	9	25.75	24.91	28.36	28.94	< 30.00
		1	1	25.65	24.84	28.27	28.85	< 30.00
		1	36	25.78	24.85	28.35	28.93	< 30.00
		36	0	23.79	22.92	26.39	26.97	< 30.00
		1	0	19.29	18.51	21.93	22.51	< 30.00
		1	37	19.13	18.36	21.77	22.35	< 30.00
20	3460.02	25	12	25.92	25.09	28.54	29.12	< 30.00
		1	1	25.92	25.04	28.51	29.09	< 30.00
		1	49	25.89	25.06	28.51	29.09	< 30.00
		50	0	23.94	23.12	26.56	27.14	< 30.00
		1	0	19.42	18.68	22.08	22.66	< 30.00
		1	50	19.47	18.63	22.08	22.66	< 30.00
20	3500.01	25	12	25.82	25.11	28.49	29.07	< 30.00
		1	1	25.90	25.14	28.55	29.13	< 30.00
		1	49	25.74	24.96	28.38	28.96	< 30.00
		50	0	23.90	23.19	26.57	27.15	< 30.00
		1	0	19.44	18.65	22.07	22.65	< 30.00
		1	50	19.26	18.59	21.95	22.53	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM QPSK								
20	3540.00	25	12	25.82	25.01	28.44	29.02	< 30.00
		1	1	25.84	25.10	28.50	29.08	< 30.00
		1	49	25.80	24.96	28.41	28.99	< 30.00
		50	0	23.93	23.12	26.55	27.13	< 30.00
		1	0	19.52	18.74	22.16	22.74	< 30.00
		1	50	19.40	18.61	22.03	22.61	< 30.00
30	3465.00	36	18	25.94	25.20	28.60	29.18	< 30.00
		1	1	25.97	25.19	28.61	29.19	< 30.00
		1	76	25.86	25.07	28.49	29.07	< 30.00
		75	0	24.06	23.28	26.70	27.28	< 30.00
		1	0	19.47	18.85	22.18	22.76	< 30.00
		1	77	19.42	18.64	22.06	22.64	< 30.00
30	3500.01	36	18	25.84	25.11	28.50	29.08	< 30.00
		1	1	26.04	25.20	28.65	29.23	< 30.00
		1	76	25.87	25.14	28.53	29.11	< 30.00
		75	0	23.98	23.20	26.62	27.20	< 30.00
		1	0	19.70	18.91	22.33	22.91	< 30.00
		1	77	19.37	18.74	22.08	22.66	< 30.00
30	3534.99	36	18	25.83	25.12	28.50	29.08	< 30.00
		1	1	25.90	25.17	28.56	29.14	< 30.00
		1	76	25.80	25.04	28.45	29.03	< 30.00
		75	0	23.97	23.28	26.65	27.23	< 30.00
		1	0	19.57	18.87	22.24	22.82	< 30.00
		1	77	19.39	18.66	22.05	22.63	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM QPSK								
40	3470.01	50	25	25.97	25.20	28.61	29.19	< 30.00
		1	1	25.98	25.33	28.68	29.26	< 30.00
		1	104	25.82	25.32	28.59	29.17	< 30.00
		100	0	24.04	23.33	26.71	27.29	< 30.00
		1	0	19.59	18.99	22.31	22.89	< 30.00
		1	105	19.49	18.90	22.22	22.80	< 30.00
40	3500.01	50	25	25.99	25.25	28.65	29.23	< 30.00
		1	1	26.13	25.29	28.74	29.32	< 30.00
		1	104	25.83	25.17	28.52	29.10	< 30.00
		100	0	23.98	23.31	26.67	27.25	< 30.00
		1	0	19.70	18.98	22.37	22.95	< 30.00
		1	105	19.40	18.82	22.13	22.71	< 30.00
40	3529.98	50	25	25.87	25.15	28.54	29.12	< 30.00
		1	1	25.83	25.30	28.58	29.16	< 30.00
		1	104	25.84	25.18	28.53	29.11	< 30.00
		100	0	23.93	23.21	26.60	27.18	< 30.00
		1	0	19.48	18.88	22.20	22.78	< 30.00
		1	105	19.44	18.72	22.11	22.69	< 30.00
50	3475.02	64	32	25.79	24.98	28.41	28.99	< 30.00
		1	1	25.78	25.22	28.52	29.10	< 30.00
		1	131	25.43	24.77	28.12	28.70	< 30.00
		128	0	23.81	23.04	26.45	27.03	< 30.00
		1	0	19.34	18.64	22.01	22.59	< 30.00
		1	132	19.05	18.30	21.70	22.28	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM QPSK								
50	3500.01	64	32	25.77	24.92	28.38	28.96	< 30.00
		1	1	25.91	25.05	28.51	29.09	< 30.00
		1	131	25.57	24.70	28.17	28.75	< 30.00
		128	0	23.81	23.02	26.44	27.02	< 30.00
		1	0	19.52	18.63	22.11	22.69	< 30.00
		1	132	19.10	18.39	21.77	22.35	< 30.00
50	3525.00	64	32	25.72	24.89	28.34	28.92	< 30.00
		1	1	25.74	24.98	28.39	28.97	< 30.00
		1	131	25.51	24.63	28.10	28.68	< 30.00
		128	0	23.83	22.98	26.44	27.02	< 30.00
		1	0	19.40	18.64	22.05	22.63	< 30.00
		1	132	19.16	18.22	21.73	22.31	< 30.00
60	3480.00	81	40	25.67	24.73	28.24	28.82	< 30.00
		1	1	25.68	24.79	28.27	28.85	< 30.00
		1	160	25.33	24.53	27.96	28.54	< 30.00
		162	0	23.64	22.76	26.23	26.81	< 30.00
		1	0	19.17	18.45	21.84	22.42	< 30.00
		1	161	18.85	18.16	21.53	22.11	< 30.00
60	3500.01	81	40	25.60	24.75	28.21	28.79	< 30.00
		1	1	25.74	24.81	28.31	28.89	< 30.00
		1	160	25.34	24.60	28.00	28.58	< 30.00
		162	0	23.66	22.76	26.24	26.82	< 30.00
		1	0	19.31	18.34	21.86	22.44	< 30.00
		1	161	18.86	18.05	21.48	22.06	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM QPSK								
60	3519.99	81	40	25.63	24.81	28.25	28.83	< 30.00
		1	1	25.71	24.82	28.30	28.88	< 30.00
		1	160	25.43	24.39	27.95	28.53	< 30.00
		162	0	23.68	22.70	26.23	26.81	< 30.00
		1	0	19.24	18.32	21.81	22.39	< 30.00
		1	161	18.98	17.99	21.52	22.10	< 30.00
70	3485.01	90	45	25.47	24.70	28.11	28.69	< 30.00
		1	1	25.66	24.77	28.25	28.83	< 30.00
		1	187	25.20	24.53	27.89	28.47	< 30.00
		180	0	23.59	22.79	26.22	26.80	< 30.00
		1	0	19.12	18.43	21.80	22.38	< 30.00
		1	188	18.71	18.02	21.39	21.97	< 30.00
70	3500.01	90	45	25.59	24.71	28.18	28.76	< 30.00
		1	1	25.83	24.89	28.40	28.98	< 30.00
		1	187	25.26	24.47	27.89	28.47	< 30.00
		180	0	23.54	22.82	26.21	26.79	< 30.00
		1	0	19.16	18.47	21.84	22.42	< 30.00
		1	188	18.81	17.93	21.40	21.98	< 30.00
70	3514.98	90	45	25.55	24.72	28.17	28.75	< 30.00
		1	1	25.68	24.74	28.25	28.83	< 30.00
		1	187	25.22	24.61	27.94	28.52	< 30.00
		180	0	23.51	22.70	26.13	26.71	< 30.00
		1	0	19.26	18.44	21.88	22.46	< 30.00
		1	188	18.82	17.99	21.44	22.02	< 30.00

Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$

Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM QPSK								
80	3490.02	108	54	25.56	24.77	28.19	28.77	< 30.00
		1	1	25.68	24.73	28.24	28.82	< 30.00
		1	215	25.28	24.54	27.94	28.52	< 30.00
		216	0	23.51	22.79	26.18	26.76	< 30.00
		1	0	19.15	18.45	21.82	22.40	< 30.00
		1	216	18.73	18.07	21.42	22.00	< 30.00
80	3500.01	108	54	25.54	24.73	28.16	28.74	< 30.00
		1	1	25.79	24.79	28.33	28.91	< 30.00
		1	215	25.37	24.40	27.92	28.50	< 30.00
		216	0	23.67	22.76	26.25	26.83	< 30.00
		1	0	19.24	18.43	21.86	22.44	< 30.00
		1	216	18.87	17.92	21.43	22.01	< 30.00
80	3510.00	108	54	25.50	24.72	28.14	28.72	< 30.00
		1	1	25.70	24.71	28.24	28.82	< 30.00
		1	215	25.33	24.47	27.93	28.51	< 30.00
		216	0	23.56	22.74	26.18	26.76	< 30.00
		1	0	19.27	18.40	21.87	22.45	< 30.00
		1	216	18.79	18.01	21.43	22.01	< 30.00
90	3495.00	120	60	25.60	24.74	28.20	28.78	< 30.00
		1	1	25.62	24.88	28.28	28.86	< 30.00
		1	243	25.34	24.50	27.95	28.53	< 30.00
		243	0	23.56	22.80	26.21	26.79	< 30.00
		1	0	19.15	18.48	21.84	22.42	< 30.00
		1	244	18.91	18.10	21.53	22.11	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM QPSK								
90	3500.01	120	60	25.57	24.82	28.22	28.80	< 30.00
		1	1	25.71	24.86	28.32	28.90	< 30.00
		1	243	25.36	24.63	28.02	28.60	< 30.00
		243	0	23.61	22.86	26.26	26.84	< 30.00
		1	0	19.18	18.50	21.86	22.44	< 30.00
		1	244	18.90	17.98	21.47	22.05	< 30.00
90	3504.99	120	60	25.63	24.83	28.26	28.84	< 30.00
		1	1	25.84	24.91	28.41	28.99	< 30.00
		1	243	25.42	24.62	28.05	28.63	< 30.00
		243	0	23.74	22.83	26.32	26.90	< 30.00
		1	0	19.42	18.53	22.01	22.59	< 30.00
		1	244	19.10	18.14	21.66	22.24	< 30.00
100	3500.01	135	67	25.56	24.86	28.23	28.81	< 30.00
		1	1	25.68	24.86	28.30	28.88	< 30.00
		1	271	25.47	24.60	28.07	28.65	< 30.00
		270	0	23.57	22.82	26.22	26.80	< 30.00
		1	0	19.14	18.49	21.84	22.42	< 30.00
		1	272	18.86	18.11	21.51	22.09	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{\text{Port 0 Output Power} / 10} + 10^{\text{Port 1 Output Power} / 10}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 16QAM								
10	3455.01	12	6	24.42	23.67	27.07	27.65	< 30.00
		1	1	24.38	23.65	27.04	27.62	< 30.00
		1	22	24.28	23.57	26.95	27.53	< 30.00
		24	0	22.49	21.80	25.17	25.75	< 30.00
		1	0	18.94	18.06	21.53	22.11	< 30.00
		1	23	18.91	18.23	21.59	22.17	< 30.00
10	3500.01	12	6	24.36	23.59	27.00	27.58	< 30.00
		1	1	24.44	23.61	27.06	27.64	< 30.00
		1	22	24.28	23.45	26.90	27.48	< 30.00
		24	0	22.59	21.78	25.21	25.79	< 30.00
		1	0	18.98	18.22	21.63	22.21	< 30.00
		1	23	18.90	18.04	21.50	22.08	< 30.00
10	3544.98	12	6	24.42	23.60	27.04	27.62	< 30.00
		1	1	24.46	23.57	27.05	27.63	< 30.00
		1	22	24.27	23.51	26.92	27.50	< 30.00
		24	0	22.53	21.75	25.17	25.75	< 30.00
		1	0	19.06	18.25	21.68	22.26	< 30.00
		1	23	18.93	18.11	21.55	22.13	< 30.00
15	3457.50	18	9	24.72	23.90	27.34	27.92	< 30.00
		1	1	24.70	23.89	27.32	27.90	< 30.00
		1	36	24.63	23.70	27.20	27.78	< 30.00
		36	0	22.83	21.99	25.44	26.02	< 30.00
		1	0	19.15	18.36	21.78	22.36	< 30.00
		1	37	19.30	18.49	21.92	22.50	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 16QAM								
15	3500.01	18	9	24.69	23.91	27.33	27.91	< 30.00
		1	1	24.55	23.78	27.19	27.77	< 30.00
		1	36	24.52	23.81	27.19	27.77	< 30.00
		36	0	22.79	21.99	25.42	26.00	< 30.00
		1	0	19.18	18.48	21.85	22.43	< 30.00
		1	37	19.08	18.34	21.74	22.32	< 30.00
15	3542.49	18	9	24.69	23.84	27.30	27.88	< 30.00
		1	1	24.51	23.82	27.19	27.77	< 30.00
		1	36	24.51	23.66	27.12	27.70	< 30.00
		36	0	22.81	21.97	25.42	26.00	< 30.00
		1	0	19.20	18.38	21.82	22.40	< 30.00
		1	37	19.16	18.33	21.78	22.36	< 30.00
20	3460.02	25	12	24.90	24.10	27.53	28.11	< 30.00
		1	1	24.67	23.88	27.30	27.88	< 30.00
		1	49	24.90	24.05	27.51	28.09	< 30.00
		50	0	23.02	22.21	25.64	26.22	< 30.00
		1	0	19.32	18.52	21.95	22.53	< 30.00
		1	50	19.39	18.60	22.02	22.60	< 30.00
20	3500.01	25	12	24.88	24.12	27.53	28.11	< 30.00
		1	1	24.84	24.07	27.48	28.06	< 30.00
		1	49	24.52	23.95	27.25	27.83	< 30.00
		50	0	22.92	22.17	25.57	26.15	< 30.00
		1	0	19.34	18.54	21.97	22.55	< 30.00
		1	50	19.30	18.50	21.93	22.51	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 16QAM								
20	3540.00	25	12	24.85	24.06	27.48	28.06	< 30.00
		1	1	24.95	24.14	27.57	28.15	< 30.00
		1	49	24.81	24.05	27.46	28.04	< 30.00
		50	0	22.95	22.14	25.57	26.15	< 30.00
		1	0	19.31	18.57	21.97	22.55	< 30.00
		1	50	19.27	18.44	21.89	22.47	< 30.00
30	3465.00	36	18	24.95	24.21	27.61	28.19	< 30.00
		1	1	24.97	24.28	27.65	28.23	< 30.00
		1	76	24.69	23.97	27.36	27.94	< 30.00
		75	0	23.10	22.33	25.74	26.32	< 30.00
		1	0	19.45	18.82	22.16	22.74	< 30.00
		1	77	19.38	18.72	22.07	22.65	< 30.00
30	3500.01	36	18	24.86	24.11	27.51	28.09	< 30.00
		1	1	24.96	24.20	27.61	28.19	< 30.00
		1	76	24.65	23.95	27.32	27.90	< 30.00
		75	0	23.08	22.24	25.69	26.27	< 30.00
		1	0	19.58	18.87	22.25	22.83	< 30.00
		1	77	19.41	18.71	22.08	22.66	< 30.00
30	3534.99	36	18	24.87	24.08	27.50	28.08	< 30.00
		1	1	24.69	23.99	27.36	27.94	< 30.00
		1	76	24.75	24.09	27.44	28.02	< 30.00
		75	0	22.99	22.31	25.67	26.25	< 30.00
		1	0	19.38	18.85	22.13	22.71	< 30.00
		1	77	19.36	18.54	21.98	22.56	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 16QAM								
40	3470.01	50	25	25.00	24.24	27.65	28.23	< 30.00
		1	1	24.86	24.28	27.59	28.17	< 30.00
		1	104	24.91	24.26	27.61	28.19	< 30.00
		100	0	23.02	22.35	25.71	26.29	< 30.00
		1	0	19.54	18.96	22.27	22.85	< 30.00
		1	105	19.54	18.95	22.27	22.85	< 30.00
40	3500.01	50	25	24.94	24.16	27.58	28.16	< 30.00
		1	1	25.19	24.27	27.76	28.34	< 30.00
		1	104	24.84	24.21	27.55	28.13	< 30.00
		100	0	23.04	22.31	25.70	26.28	< 30.00
		1	0	19.75	19.02	22.41	22.99	< 30.00
		1	105	19.31	18.71	22.03	22.61	< 30.00
40	3529.98	50	25	24.89	24.14	27.54	28.12	< 30.00
		1	1	24.98	24.26	27.65	28.23	< 30.00
		1	104	24.74	24.14	27.46	28.04	< 30.00
		100	0	22.93	22.25	25.61	26.19	< 30.00
		1	0	19.62	18.91	22.29	22.87	< 30.00
		1	105	19.56	18.83	22.22	22.80	< 30.00
50	3475.02	64	32	14.81	23.97	24.47	25.05	< 30.00
		1	1	24.60	23.81	27.23	27.81	< 30.00
		1	131	24.47	23.67	27.10	27.68	< 30.00
		128	0	22.84	22.06	25.48	26.06	< 30.00
		1	0	19.23	18.57	21.92	22.50	< 30.00
		1	132	18.99	18.31	21.67	22.25	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 16QAM								
50	3500.01	64	32	24.74	23.98	27.39	27.97	< 30.00
		1	1	24.95	24.02	27.52	28.10	< 30.00
		1	131	24.32	23.52	26.95	27.53	< 30.00
		128	0	22.82	22.07	25.47	26.05	< 30.00
		1	0	19.60	18.70	22.18	22.76	< 30.00
		1	132	19.21	18.31	21.79	22.37	< 30.00
50	3525.00	64	32	24.75	23.89	27.35	27.93	< 30.00
		1	1	24.53	23.82	27.20	27.78	< 30.00
		1	131	24.50	23.65	27.11	27.69	< 30.00
		128	0	22.83	22.02	25.45	26.03	< 30.00
		1	0	19.26	18.46	21.89	22.47	< 30.00
		1	132	19.03	18.19	21.64	22.22	< 30.00
60	3480.00	81	40	24.63	23.66	27.18	27.76	< 30.00
		1	1	24.66	23.76	27.24	27.82	< 30.00
		1	160	24.18	23.40	26.82	27.40	< 30.00
		162	0	22.66	21.77	25.25	25.83	< 30.00
		1	0	19.10	18.31	21.73	22.31	< 30.00
		1	161	18.76	17.97	21.39	21.97	< 30.00
60	3500.01	81	40	24.55	23.72	27.17	27.75	< 30.00
		1	1	24.68	23.78	27.26	27.84	< 30.00
		1	160	24.36	23.34	26.89	27.47	< 30.00
		162	0	22.67	21.77	25.25	25.83	< 30.00
		1	0	19.23	18.29	21.80	22.38	< 30.00
		1	161	18.87	18.01	21.47	22.05	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 16QAM								
60	3519.99	81	40	24.62	23.69	27.19	27.77	< 30.00
		1	1	24.72	23.77	27.28	27.86	< 30.00
		1	160	24.34	23.40	26.91	27.49	< 30.00
		162	0	22.68	21.71	25.23	25.81	< 30.00
		1	0	19.19	18.25	21.76	22.34	< 30.00
		1	161	18.85	17.96	21.44	22.02	< 30.00
70	3485.01	90	45	24.51	23.74	27.15	27.73	< 30.00
		1	1	24.53	23.78	27.18	27.76	< 30.00
		1	187	24.26	23.51	26.91	27.49	< 30.00
		180	0	22.58	21.78	25.21	25.79	< 30.00
		1	0	19.04	18.30	21.70	22.28	< 30.00
		1	188	18.68	17.97	21.35	21.93	< 30.00
70	3500.01	90	45	24.52	23.70	27.14	27.72	< 30.00
		1	1	24.81	23.73	27.31	27.89	< 30.00
		1	187	24.04	23.25	26.67	27.25	< 30.00
		180	0	22.54	21.80	25.20	25.78	< 30.00
		1	0	19.22	18.41	21.84	22.42	< 30.00
		1	188	18.82	17.97	21.43	22.01	< 30.00
70	3514.98	90	45	24.47	23.66	27.09	27.67	< 30.00
		1	1	24.61	23.76	27.22	27.80	< 30.00
		1	187	24.18	23.32	26.78	27.36	< 30.00
		180	0	22.55	21.69	25.15	25.73	< 30.00
		1	0	19.19	18.28	21.77	22.35	< 30.00
		1	188	18.66	17.91	21.31	21.89	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 16QAM								
80	3490.02	108	54	24.54	23.72	27.16	27.74	< 30.00
		1	1	24.69	23.75	27.26	27.84	< 30.00
		1	215	24.02	23.23	26.65	27.23	< 30.00
		216	0	22.55	21.78	25.19	25.77	< 30.00
		1	0	19.15	18.55	21.87	22.45	< 30.00
		1	216	18.74	18.11	21.45	22.03	< 30.00
80	3500.01	108	54	24.50	23.78	27.17	27.75	< 30.00
		1	1	24.74	23.78	27.30	27.88	< 30.00
		1	215	24.38	23.49	26.97	27.55	< 30.00
		216	0	22.66	21.76	25.24	25.82	< 30.00
		1	0	19.18	18.32	21.78	22.36	< 30.00
		1	216	18.84	17.96	21.43	22.01	< 30.00
80	3510.00	108	54	24.50	23.73	27.14	27.72	< 30.00
		1	1	24.69	23.70	27.23	27.81	< 30.00
		1	215	24.28	23.33	26.84	27.42	< 30.00
		216	0	22.57	21.74	25.19	25.77	< 30.00
		1	0	19.20	18.30	21.78	22.36	< 30.00
		1	216	18.69	17.86	21.31	21.89	< 30.00
90	3495.00	120	60	24.59	23.72	27.19	27.77	< 30.00
		1	1	24.63	23.81	27.25	27.83	< 30.00
		1	243	24.36	23.58	27.00	27.58	< 30.00
		243	0	22.63	21.86	25.27	25.85	< 30.00
		1	0	19.03	18.25	21.67	22.25	< 30.00
		1	244	18.82	18.01	21.44	22.02	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 16QAM								
90	3500.01	120	60	24.61	23.82	27.24	27.82	< 30.00
		1	1	24.87	23.82	27.39	27.97	< 30.00
		1	243	24.35	23.56	26.98	27.56	< 30.00
		243	0	22.66	21.90	25.31	25.89	< 30.00
		1	0	19.11	18.43	21.79	22.37	< 30.00
		1	244	18.83	18.06	21.47	22.05	< 30.00
90	3504.99	120	60	24.67	23.82	27.28	27.86	< 30.00
		1	1	24.71	23.82	27.30	27.88	< 30.00
		1	243	24.31	23.45	26.91	27.49	< 30.00
		243	0	22.70	21.84	25.30	25.88	< 30.00
		1	0	19.61	18.37	22.04	22.62	< 30.00
		1	244	19.10	18.22	21.69	22.27	< 30.00
100	3500.01	135	67	24.55	23.83	27.22	27.80	< 30.00
		1	1	24.62	23.79	27.24	27.82	< 30.00
		1	271	24.31	23.58	26.97	27.55	< 30.00
		270	0	22.61	21.83	25.25	25.83	< 30.00
		1	0	19.15	18.40	21.80	22.38	< 30.00
		1	272	18.80	18.06	21.46	22.04	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{\text{Port 0 Output Power} / 10} + 10^{\text{Port 1 Output Power} / 10}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 64QAM								
10	3455.01	12	6	22.58	21.75	25.20	25.78	< 30.00
		1	1	22.63	21.79	25.24	25.82	< 30.00
		1	22	22.45	21.77	25.13	25.71	< 30.00
		24	0	22.05	21.31	24.71	25.29	< 30.00
		1	0	19.09	18.33	21.74	22.32	< 30.00
		1	23	18.90	18.21	21.58	22.16	< 30.00
10	3500.01	12	6	22.57	21.76	25.19	25.77	< 30.00
		1	1	22.66	21.86	25.29	25.87	< 30.00
		1	22	22.53	21.97	25.27	25.85	< 30.00
		24	0	22.00	21.21	24.63	25.21	< 30.00
		1	0	19.10	18.38	21.77	22.35	< 30.00
		1	23	19.01	18.33	21.69	22.27	< 30.00
10	3544.98	12	6	22.51	21.75	25.16	25.74	< 30.00
		1	1	22.45	21.66	25.08	25.66	< 30.00
		1	22	22.52	21.75	25.16	25.74	< 30.00
		24	0	22.02	21.27	24.67	25.25	< 30.00
		1	0	19.08	18.28	21.71	22.29	< 30.00
		1	23	19.13	18.36	21.77	22.35	< 30.00
15	3457.50	18	9	22.80	21.97	25.42	26.00	< 30.00
		1	1	22.79	22.13	25.48	26.06	< 30.00
		1	36	22.89	21.99	25.47	26.05	< 30.00
		36	0	22.38	21.52	24.98	25.56	< 30.00
		1	0	19.16	18.37	21.79	22.37	< 30.00
		1	37	19.33	18.37	21.89	22.47	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 64QAM								
15	3500.01	18	9	22.78	22.01	25.42	26.00	< 30.00
		1	1	22.81	22.03	25.45	26.03	< 30.00
		1	36	22.82	22.08	25.48	26.06	< 30.00
		36	0	22.29	21.48	24.91	25.49	< 30.00
		1	0	19.58	18.78	22.21	22.79	< 30.00
		1	37	19.34	18.73	22.06	22.64	< 30.00
15	3542.49	18	9	22.83	21.95	25.42	26.00	< 30.00
		1	1	22.73	22.02	25.40	25.98	< 30.00
		1	36	22.75	21.95	25.38	25.96	< 30.00
		36	0	22.36	21.48	24.95	25.53	< 30.00
		1	0	19.57	18.88	22.25	22.83	< 30.00
		1	37	19.24	18.39	21.85	22.43	< 30.00
20	3460.02	25	12	22.92	22.14	25.56	26.14	< 30.00
		1	1	22.89	22.08	25.51	26.09	< 30.00
		1	49	23.10	22.15	25.66	26.24	< 30.00
		50	0	22.52	21.70	25.14	25.72	< 30.00
		1	0	19.41	18.64	22.05	22.63	< 30.00
		1	50	19.35	18.50	21.96	22.54	< 30.00
20	3500.01	25	12	22.87	22.15	25.54	26.12	< 30.00
		1	1	22.88	22.14	25.54	26.12	< 30.00
		1	49	22.77	22.16	25.49	26.07	< 30.00
		50	0	22.50	21.70	25.13	25.71	< 30.00
		1	0	19.37	18.51	21.97	22.55	< 30.00
		1	50	19.25	18.49	21.90	22.48	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 64QAM								
20	3540.00	25	12	22.88	22.13	25.53	26.11	< 30.00
		1	1	22.82	22.17	25.52	26.10	< 30.00
		1	49	23.01	22.23	25.65	26.23	< 30.00
		50	0	22.43	21.63	25.06	25.64	< 30.00
		1	0	19.42	18.61	22.04	22.62	< 30.00
		1	50	19.21	18.39	21.83	22.41	< 30.00
30	3465.00	36	18	23.02	22.29	25.68	26.26	< 30.00
		1	1	23.04	22.34	25.71	26.29	< 30.00
		1	76	23.20	22.45	25.85	26.43	< 30.00
		75	0	22.61	21.84	25.25	25.83	< 30.00
		1	0	19.45	18.81	22.15	22.73	< 30.00
		1	77	19.56	18.72	22.17	22.75	< 30.00
30	3500.01	36	18	22.94	22.23	25.61	26.19	< 30.00
		1	1	23.14	22.35	25.77	26.35	< 30.00
		1	76	22.96	22.27	25.64	26.22	< 30.00
		75	0	22.58	21.80	25.22	25.80	< 30.00
		1	0	19.71	19.02	22.39	22.97	< 30.00
		1	77	19.44	18.79	22.14	22.72	< 30.00
30	3534.99	36	18	22.93	22.17	25.58	26.16	< 30.00
		1	1	23.08	22.35	25.74	26.32	< 30.00
		1	76	22.96	22.30	25.65	26.23	< 30.00
		75	0	22.49	21.82	25.18	25.76	< 30.00
		1	0	19.49	18.85	22.19	22.77	< 30.00
		1	77	19.27	18.54	21.93	22.51	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 64QAM								
40	3470.01	50	25	23.04	22.34	25.71	26.29	< 30.00
		1	1	23.02	22.36	25.71	26.29	< 30.00
		1	104	23.08	22.40	25.76	26.34	< 30.00
		100	0	22.55	21.93	25.26	25.84	< 30.00
		1	0	19.63	19.01	22.34	22.92	< 30.00
		1	105	19.49	18.94	22.23	22.81	< 30.00
40	3500.01	50	25	22.98	22.16	25.60	26.18	< 30.00
		1	1	23.20	22.37	25.82	26.40	< 30.00
		1	104	23.03	22.29	25.69	26.27	< 30.00
		100	0	22.58	21.85	25.24	25.82	< 30.00
		1	0	19.89	19.14	22.54	23.12	< 30.00
		1	105	19.33	18.71	22.04	22.62	< 30.00
40	3529.98	50	25	22.93	22.25	25.61	26.19	< 30.00
		1	1	23.11	22.50	25.83	26.41	< 30.00
		1	104	23.03	22.42	25.75	26.33	< 30.00
		100	0	22.52	21.83	25.20	25.78	< 30.00
		1	0	19.53	18.83	22.20	22.78	< 30.00
		1	105	19.39	18.74	22.09	22.67	< 30.00
50	3475.02	64	32	22.82	22.09	25.48	26.06	< 30.00
		1	1	22.96	22.32	25.66	26.24	< 30.00
		1	131	22.76	21.94	25.38	25.96	< 30.00
		128	0	22.28	21.54	24.94	25.52	< 30.00
		1	0	19.27	18.65	21.98	22.56	< 30.00
		1	132	18.95	18.24	21.62	22.20	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 64QAM								
50	3500.01	64	32	22.81	22.04	25.45	26.03	< 30.00
		1	1	23.18	22.35	25.80	26.38	< 30.00
		1	131	22.64	21.89	25.29	25.87	< 30.00
		128	0	22.30	21.51	24.93	25.51	< 30.00
		1	0	19.54	18.63	22.12	22.70	< 30.00
		1	132	19.05	18.35	21.72	22.30	< 30.00
50	3525.00	64	32	22.79	21.94	25.40	25.98	< 30.00
		1	1	23.07	22.23	25.68	26.26	< 30.00
		1	131	22.54	21.72	25.16	25.74	< 30.00
		128	0	22.30	21.46	24.91	25.49	< 30.00
		1	0	19.38	18.59	22.01	22.59	< 30.00
		1	132	19.25	18.38	21.85	22.43	< 30.00
60	3480.00	81	40	22.67	21.78	25.26	25.84	< 30.00
		1	1	22.85	21.92	25.42	26.00	< 30.00
		1	160	22.46	21.67	25.09	25.67	< 30.00
		162	0	22.13	21.29	24.74	25.32	< 30.00
		1	0	19.21	18.38	21.83	22.41	< 30.00
		1	161	18.85	18.04	21.47	22.05	< 30.00
60	3500.01	81	40	22.67	21.82	25.28	25.86	< 30.00
		1	1	23.05	22.11	25.62	26.20	< 30.00
		1	160	22.56	21.67	25.15	25.73	< 30.00
		162	0	22.15	21.30	24.76	25.34	< 30.00
		1	0	19.23	18.20	21.76	22.34	< 30.00
		1	161	18.82	17.98	21.43	22.01	< 30.00

Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$

Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 64QAM								
60	3519.99	81	40	22.65	21.77	25.24	25.82	< 30.00
		1	1	22.78	21.85	25.35	25.93	< 30.00
		1	160	22.55	21.48	25.06	25.64	< 30.00
		162	0	22.20	21.19	24.73	25.31	< 30.00
		1	0	19.50	18.65	22.11	22.69	< 30.00
		1	161	19.04	18.02	21.57	22.15	< 30.00
70	3485.01	90	45	22.52	21.75	25.16	25.74	< 30.00
		1	1	22.93	21.90	25.46	26.04	< 30.00
		1	187	22.41	21.72	25.09	25.67	< 30.00
		180	0	22.16	21.31	24.77	25.35	< 30.00
		1	0	19.28	18.37	21.86	22.44	< 30.00
		1	188	18.78	18.08	21.45	22.03	< 30.00
70	3500.01	90	45	22.55	21.79	25.20	25.78	< 30.00
		1	1	22.92	21.96	25.48	26.06	< 30.00
		1	187	22.56	21.65	25.14	25.72	< 30.00
		180	0	22.10	21.31	24.73	25.31	< 30.00
		1	0	19.14	18.34	21.77	22.35	< 30.00
		1	188	18.82	18.01	21.44	22.02	< 30.00
70	3514.98	90	45	22.56	21.76	25.19	25.77	< 30.00
		1	1	22.82	21.87	25.38	25.96	< 30.00
		1	187	22.48	21.65	25.10	25.68	< 30.00
		180	0	22.10	21.25	24.71	25.29	< 30.00
		1	0	19.11	18.34	21.75	22.33	< 30.00
		1	188	18.68	17.87	21.30	21.88	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 64QAM								
80	3490.02	108	54	22.61	21.76	25.22	25.80	< 30.00
		1	1	22.69	21.96	25.35	25.93	< 30.00
		1	215	22.50	21.63	25.10	25.68	< 30.00
		216	0	22.05	21.36	24.73	25.31	< 30.00
		1	0	18.99	18.37	21.70	22.28	< 30.00
		1	216	18.69	17.98	21.36	21.94	< 30.00
80	3500.01	108	54	22.54	21.75	25.17	25.75	< 30.00
		1	1	22.98	22.10	25.57	26.15	< 30.00
		1	215	22.35	21.55	24.98	25.56	< 30.00
		216	0	22.16	21.31	24.77	25.35	< 30.00
		1	0	19.48	18.58	22.06	22.64	< 30.00
		1	216	19.04	18.21	21.66	22.24	< 30.00
80	3510.00	108	54	22.51	21.71	25.14	25.72	< 30.00
		1	1	22.84	21.92	25.41	25.99	< 30.00
		1	215	22.25	21.51	24.91	25.49	< 30.00
		216	0	22.03	21.23	24.66	25.24	< 30.00
		1	0	19.52	18.68	22.13	22.71	< 30.00
		1	216	19.09	18.25	21.70	22.28	< 30.00
90	3495.00	120	60	22.66	21.82	25.27	25.85	< 30.00
		1	1	22.71	22.00	25.38	25.96	< 30.00
		1	243	22.50	21.64	25.10	25.68	< 30.00
		243	0	22.10	21.36	24.76	25.34	< 30.00
		1	0	19.20	18.49	21.87	22.45	< 30.00
		1	244	19.14	18.37	21.78	22.36	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 64QAM								
90	3500.01	120	60	22.65	21.89	25.30	25.88	< 30.00
		1	1	22.96	22.08	25.55	26.13	< 30.00
		1	243	22.58	21.84	25.24	25.82	< 30.00
		243	0	22.13	21.37	24.78	25.36	< 30.00
		1	0	19.25	18.53	21.92	22.50	< 30.00
		1	244	18.86	18.07	21.49	22.07	< 30.00
90	3504.99	120	60	22.66	21.92	25.32	25.90	< 30.00
		1	1	23.02	22.04	25.57	26.15	< 30.00
		1	243	22.58	21.68	25.16	25.74	< 30.00
		243	0	22.19	21.37	24.81	25.39	< 30.00
		1	0	19.46	18.62	22.07	22.65	< 30.00
		1	244	19.10	18.12	21.65	22.23	< 30.00
100	3500.01	135	67	22.62	21.82	25.25	25.83	< 30.00
		1	1	22.81	21.97	25.42	26.00	< 30.00
		1	271	22.50	21.61	25.09	25.67	< 30.00
		270	0	22.13	21.33	24.76	25.34	< 30.00
		1	0	19.36	18.70	22.05	22.63	< 30.00
		1	272	18.96	18.23	21.62	22.20	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{\text{Port 0 Output Power} / 10} + 10^{\text{Port 1 Output Power} / 10}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 256QAM								
10	3455.01	12	6	20.33	19.66	23.02	23.60	< 30.00
		1	1	20.07	19.36	22.74	23.32	< 30.00
		1	22	20.10	19.45	22.80	23.38	< 30.00
		24	0	20.16	19.45	22.83	23.41	< 30.00
		1	0	19.09	18.39	21.76	22.34	< 30.00
		1	23	19.04	18.40	21.74	22.32	< 30.00
10	3500.01	12	6	20.29	19.59	22.96	23.54	< 30.00
		1	1	20.18	18.51	22.44	23.02	< 30.00
		1	22	20.54	19.59	23.10	23.68	< 30.00
		24	0	20.18	19.51	22.87	23.45	< 30.00
		1	0	19.09	18.46	21.80	22.38	< 30.00
		1	23	18.99	18.44	21.73	22.31	< 30.00
10	3544.98	12	6	20.21	19.41	22.84	23.42	< 30.00
		1	1	20.10	19.48	22.81	23.39	< 30.00
		1	22	20.10	19.45	22.80	23.38	< 30.00
		24	0	20.23	19.41	22.85	23.43	< 30.00
		1	0	19.21	18.54	21.90	22.48	< 30.00
		1	23	19.04	18.38	21.73	22.31	< 30.00
15	3457.50	18	9	20.48	19.74	23.14	23.72	< 30.00
		1	1	20.30	19.63	22.99	23.57	< 30.00
		1	36	20.45	19.81	23.15	23.73	< 30.00
		36	0	20.34	19.50	22.95	23.53	< 30.00
		1	0	18.37	18.58	21.49	22.07	< 30.00
		1	37	19.30	18.48	21.92	22.50	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 256QAM								
15	3500.01	18	9	20.39	19.61	23.03	23.61	< 30.00
		1	1	20.24	19.46	22.88	23.46	< 30.00
		1	36	20.17	19.42	22.82	23.40	< 30.00
		36	0	20.30	19.52	22.94	23.52	< 30.00
		1	0	19.21	18.42	21.84	22.42	< 30.00
		1	37	19.34	18.53	21.96	22.54	< 30.00
15	3542.49	18	9	20.34	19.51	22.96	23.54	< 30.00
		1	1	20.27	19.50	22.91	23.49	< 30.00
		1	36	20.34	19.52	22.96	23.54	< 30.00
		36	0	20.25	19.44	22.87	23.45	< 30.00
		1	0	19.23	18.44	21.86	22.44	< 30.00
		1	37	19.33	18.47	21.93	22.51	< 30.00
20	3460.02	25	12	20.51	19.74	23.15	23.73	< 30.00
		1	1	20.25	19.46	22.88	23.46	< 30.00
		1	49	20.52	19.70	23.14	23.72	< 30.00
		50	0	20.47	19.69	23.11	23.69	< 30.00
		1	0	19.17	18.48	21.85	22.43	< 30.00
		1	50	19.32	18.46	21.92	22.50	< 30.00
20	3500.01	25	12	20.47	19.74	23.13	23.71	< 30.00
		1	1	20.58	19.81	23.22	23.80	< 30.00
		1	49	20.51	19.74	23.15	23.73	< 30.00
		50	0	20.43	19.65	23.07	23.65	< 30.00
		1	0	19.57	18.83	22.23	22.81	< 30.00
		1	50	19.44	18.70	22.10	22.68	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 256QAM								
20	3540.00	25	12	20.41	19.62	23.04	23.62	< 30.00
		1	1	20.43	19.71	23.10	23.68	< 30.00
		1	49	20.47	19.66	23.09	23.67	< 30.00
		50	0	20.45	19.67	23.09	23.67	< 30.00
		1	0	19.58	18.76	22.20	22.78	< 30.00
		1	50	19.25	18.40	21.86	22.44	< 30.00
30	3465.00	36	18	20.46	19.75	23.13	23.71	< 30.00
		1	1	20.47	19.89	23.20	23.78	< 30.00
		1	76	20.41	19.73	23.09	23.67	< 30.00
		75	0	20.56	19.82	23.22	23.80	< 30.00
		1	0	19.55	18.89	22.24	22.82	< 30.00
		1	77	19.52	18.75	22.16	22.74	< 30.00
30	3500.01	36	18	20.41	19.73	23.09	23.67	< 30.00
		1	1	20.71	20.09	23.42	24.00	< 30.00
		1	76	20.48	19.82	23.17	23.75	< 30.00
		75	0	20.47	19.83	23.17	23.75	< 30.00
		1	0	19.42	18.74	22.10	22.68	< 30.00
		1	77	19.39	18.82	22.12	22.70	< 30.00
30	3534.99	36	18	20.38	19.71	23.07	23.65	< 30.00
		1	1	20.60	20.04	23.34	23.92	< 30.00
		1	76	20.44	19.74	23.11	23.69	< 30.00
		75	0	20.41	19.81	23.13	23.71	< 30.00
		1	0	19.32	18.79	22.07	22.65	< 30.00
		1	77	19.17	18.57	21.89	22.47	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 256QAM								
40	3470.01	50	25	20.53	19.83	23.20	23.78	< 30.00
		1	1	20.47	19.86	23.19	23.77	< 30.00
		1	104	20.28	19.79	23.05	23.63	< 30.00
		100	0	20.56	19.85	23.23	23.81	< 30.00
		1	0	19.48	18.86	22.19	22.77	< 30.00
		1	105	19.40	18.77	22.11	22.69	< 30.00
40	3500.01	50	25	20.47	19.79	23.15	23.73	< 30.00
		1	1	20.61	19.82	23.24	23.82	< 30.00
		1	104	20.35	19.73	23.06	23.64	< 30.00
		100	0	20.59	19.82	23.23	23.81	< 30.00
		1	0	19.79	19.09	22.46	23.04	< 30.00
		1	105	19.51	18.88	22.22	22.80	< 30.00
40	3529.98	50	25	20.45	19.72	23.11	23.69	< 30.00
		1	1	20.36	19.81	23.10	23.68	< 30.00
		1	104	20.39	19.68	23.06	23.64	< 30.00
		100	0	20.49	19.75	23.15	23.73	< 30.00
		1	0	19.57	19.03	22.32	22.90	< 30.00
		1	105	19.30	18.65	22.00	22.58	< 30.00
50	3475.02	64	32	20.45	19.58	23.05	23.63	< 30.00
		1	1	20.50	19.85	23.20	23.78	< 30.00
		1	131	20.30	19.49	22.92	23.50	< 30.00
		128	0	20.43	19.62	23.05	23.63	< 30.00
		1	0	19.30	18.60	21.97	22.55	< 30.00
		1	132	19.20	18.47	21.86	22.44	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 256QAM								
50	3500.01	64	32	20.39	19.44	22.95	23.53	< 30.00
		1	1	20.61	19.67	23.18	23.76	< 30.00
		1	131	20.19	19.40	22.82	23.40	< 30.00
		128	0	20.18	19.36	22.80	23.38	< 30.00
		1	0	19.72	18.75	22.27	22.85	< 30.00
		1	132	19.05	18.20	21.66	22.24	< 30.00
50	3525.00	64	32	20.32	19.50	22.94	23.52	< 30.00
		1	1	20.19	19.32	22.79	23.37	< 30.00
		1	131	20.18	19.26	22.75	23.33	< 30.00
		128	0	20.34	19.52	22.96	23.54	< 30.00
		1	0	19.26	18.53	21.92	22.50	< 30.00
		1	132	19.20	18.42	21.84	22.42	< 30.00
60	3480.00	81	40	20.33	19.42	22.91	23.49	< 30.00
		1	1	20.43	19.56	23.03	23.61	< 30.00
		1	160	20.03	19.31	22.70	23.28	< 30.00
		162	0	20.34	19.39	22.90	23.48	< 30.00
		1	0	19.36	18.55	21.98	22.56	< 30.00
		1	161	19.05	18.26	21.68	22.26	< 30.00
60	3500.01	81	40	20.29	19.36	22.86	23.44	< 30.00
		1	1	20.46	19.43	22.99	23.57	< 30.00
		1	160	20.09	19.03	22.60	23.18	< 30.00
		162	0	20.30	19.32	22.85	23.43	< 30.00
		1	0	19.37	18.50	21.97	22.55	< 30.00
		1	161	19.06	18.05	21.59	22.17	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 256QAM								
60	3519.99	81	40	20.26	19.31	22.82	23.40	< 30.00
		1	1	20.18	19.14	22.70	23.28	< 30.00
		1	160	20.13	19.18	22.69	23.27	< 30.00
		162	0	20.27	19.33	22.84	23.42	< 30.00
		1	0	19.14	18.26	21.73	22.31	< 30.00
		1	161	19.15	18.13	21.68	22.26	< 30.00
70	3485.01	90	45	20.10	19.27	22.72	23.30	< 30.00
		1	1	20.26	19.45	22.88	23.46	< 30.00
		1	187	19.59	19.03	22.33	22.91	< 30.00
		180	0	20.10	19.29	22.72	23.30	< 30.00
		1	0	19.22	18.52	21.89	22.47	< 30.00
		1	188	18.51	17.92	21.24	21.82	< 30.00
70	3500.01	90	45	20.09	19.22	22.69	23.27	< 30.00
		1	1	20.38	19.44	22.95	23.53	< 30.00
		1	187	19.66	18.81	22.27	22.85	< 30.00
		180	0	20.14	19.30	22.75	23.33	< 30.00
		1	0	19.28	18.37	21.86	22.44	< 30.00
		1	188	18.87	18.14	21.53	22.11	< 30.00
70	3514.98	90	45	20.08	19.29	22.71	23.29	< 30.00
		1	1	20.17	19.20	22.72	23.30	< 30.00
		1	187	19.73	18.77	22.29	22.87	< 30.00
		180	0	20.11	19.29	22.73	23.31	< 30.00
		1	0	19.33	18.52	21.95	22.53	< 30.00
		1	188	18.67	17.80	21.27	21.85	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 256QAM								
80	3490.02	108	54	20.21	19.34	22.81	23.39	< 30.00
		1	1	20.25	19.42	22.87	23.45	< 30.00
		1	215	20.01	19.21	22.64	23.22	< 30.00
		216	0	20.20	19.34	22.80	23.38	< 30.00
		1	0	19.41	18.58	22.03	22.61	< 30.00
		1	216	19.02	18.16	21.62	22.20	< 30.00
80	3500.01	108	54	20.19	19.35	22.80	23.38	< 30.00
		1	1	20.31	19.37	22.88	23.46	< 30.00
		1	215	19.86	19.07	22.49	23.07	< 30.00
		216	0	20.19	19.37	22.81	23.39	< 30.00
		1	0	19.19	18.35	21.80	22.38	< 30.00
		1	216	19.06	18.11	21.62	22.20	< 30.00
80	3510.00	108	54	20.10	19.21	22.69	23.27	< 30.00
		1	1	20.22	19.27	22.78	23.36	< 30.00
		1	215	19.80	18.84	22.36	22.94	< 30.00
		216	0	20.17	19.21	22.73	23.31	< 30.00
		1	0	19.25	18.31	21.82	22.40	< 30.00
		1	216	18.71	17.83	21.30	21.88	< 30.00
90	3495.00	120	60	20.19	19.34	22.80	23.38	< 30.00
		1	1	20.17	19.31	22.77	23.35	< 30.00
		1	243	19.94	19.08	22.54	23.12	< 30.00
		243	0	20.21	19.34	22.81	23.39	< 30.00
		1	0	19.09	18.34	21.74	22.32	< 30.00
		1	244	18.94	18.25	21.62	22.20	< 30.00

Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$

Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 256QAM								
90	3500.01	120	60	20.20	19.36	22.81	23.39	< 30.00
		1	1	20.40	19.47	22.97	23.55	< 30.00
		1	243	20.06	19.11	22.62	23.20	< 30.00
		243	0	20.26	19.34	22.83	23.41	< 30.00
		1	0	19.33	18.55	21.97	22.55	< 30.00
		1	244	18.89	18.02	21.49	22.07	< 30.00
90	3504.99	120	60	20.21	19.32	22.80	23.38	< 30.00
		1	1	20.49	19.53	23.05	23.63	< 30.00
		1	243	20.04	19.24	22.67	23.25	< 30.00
		243	0	20.19	19.31	22.78	23.36	< 30.00
		1	0	19.38	18.60	22.02	22.60	< 30.00
		1	244	19.02	18.25	21.66	22.24	< 30.00
100	3500.01	135	67	20.22	19.37	22.83	23.41	< 30.00
		1	1	20.27	19.45	22.89	23.47	< 30.00
		1	271	20.01	19.17	22.62	23.20	< 30.00
		270	0	20.21	19.28	22.78	23.36	< 30.00
		1	0	19.25	18.45	21.88	22.46	< 30.00
		1	272	18.98	18.20	21.62	22.20	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{\text{Port 0 Output Power} / 10} + 10^{\text{Port 1 Output Power} / 10}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM QPSK								
10	3455.01	12	6	24.41	23.58	27.03	27.61	< 30.00
		1	1	24.29	23.55	26.95	27.53	< 30.00
		1	22	24.44	23.56	27.03	27.61	< 30.00
		24	0	21.86	21.05	24.48	25.06	< 30.00
		1	0	19.46	18.64	22.08	22.66	< 30.00
		1	23	19.36	18.74	22.07	22.65	< 30.00
10	3500.01	12	6	24.27	23.52	26.92	27.50	< 30.00
		1	1	24.37	23.67	27.04	27.62	< 30.00
		1	22	24.46	23.70	27.11	27.69	< 30.00
		24	0	21.88	21.07	24.50	25.08	< 30.00
		1	0	19.28	18.56	21.95	22.53	< 30.00
		1	23	19.40	18.77	22.11	22.69	< 30.00
10	3544.98	12	6	24.47	23.57	27.05	27.63	< 30.00
		1	1	24.38	23.50	26.97	27.55	< 30.00
		1	22	24.41	23.50	26.99	27.57	< 30.00
		24	0	21.85	20.91	24.42	25.00	< 30.00
		1	0	19.47	18.61	22.07	22.65	< 30.00
		1	23	19.39	18.56	22.01	22.59	< 30.00
15	3457.50	19	9	24.47	23.60	27.07	27.65	< 30.00
		1	1	24.43	23.62	27.05	27.63	< 30.00
		1	36	24.71	23.90	27.33	27.91	< 30.00
		38	0	22.05	21.11	24.62	25.20	< 30.00
		1	0	19.57	18.82	22.22	22.80	< 30.00
		1	37	19.85	18.68	22.31	22.89	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM QPSK								
15	3500.01	19	9	24.43	23.55	27.02	27.60	< 30.00
		1	1	24.39	23.81	27.12	27.70	< 30.00
		1	36	24.37	23.53	26.98	27.56	< 30.00
		38	0	21.93	21.12	24.55	25.13	< 30.00
		1	0	19.63	18.77	22.23	22.81	< 30.00
		1	37	19.45	18.68	22.09	22.67	< 30.00
15	3542.49	19	9	24.47	23.48	27.01	27.59	< 30.00
		1	1	24.70	23.66	27.22	27.80	< 30.00
		1	36	24.63	23.59	27.15	27.73	< 30.00
		38	0	21.96	21.08	24.55	25.13	< 30.00
		1	0	19.55	18.78	22.19	22.77	< 30.00
		1	37	19.60	18.67	22.17	22.75	< 30.00
20	3460.02	25	12	24.56	23.73	27.18	27.76	< 30.00
		1	1	24.59	23.67	27.16	27.74	< 30.00
		1	49	24.47	23.70	27.11	27.69	< 30.00
		51	0	22.13	21.11	24.66	25.24	< 30.00
		1	0	19.52	18.68	22.13	22.71	< 30.00
		1	50	19.68	18.60	22.18	22.76	< 30.00
20	3500.01	25	12	24.43	23.56	27.03	27.61	< 30.00
		1	1	24.54	23.57	27.09	27.67	< 30.00
		1	49	24.57	23.63	27.14	27.72	< 30.00
		51	0	21.95	21.11	24.56	25.14	< 30.00
		1	0	19.72	18.90	22.34	22.92	< 30.00
		1	50	19.66	18.87	22.29	22.87	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM QPSK								
20	3540.00	25	12	24.47	23.60	27.07	27.65	< 30.00
		1	1	24.49	23.65	27.10	27.68	< 30.00
		1	49	24.56	23.58	27.11	27.69	< 30.00
		51	0	21.99	21.13	24.59	25.17	< 30.00
		1	0	19.56	18.80	22.21	22.79	< 30.00
		1	50	19.56	18.59	22.11	22.69	< 30.00
30	3465.00	39	19	24.59	23.68	27.17	27.75	< 30.00
		1	1	24.76	23.91	27.37	27.95	< 30.00
		1	76	24.59	23.57	27.12	27.70	< 30.00
		78	0	22.08	21.25	24.70	25.28	< 30.00
		1	0	19.60	18.89	22.27	22.85	< 30.00
		1	77	19.71	18.92	22.34	22.92	< 30.00
30	3500.01	39	19	24.43	23.63	27.06	27.64	< 30.00
		1	1	24.69	24.01	27.37	27.95	< 30.00
		1	76	24.70	24.02	27.38	27.96	< 30.00
		78	0	22.02	21.23	24.65	25.23	< 30.00
		1	0	19.74	19.09	22.44	23.02	< 30.00
		1	77	19.52	18.75	22.16	22.74	< 30.00
30	3534.99	39	19	24.43	23.72	27.10	27.68	< 30.00
		1	1	24.66	24.02	27.36	27.94	< 30.00
		1	76	24.48	23.77	27.15	27.73	< 30.00
		78	0	22.03	21.27	24.68	25.26	< 30.00
		1	0	19.70	19.08	22.41	22.99	< 30.00
		1	77	19.61	18.78	22.23	22.81	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM QPSK								
40	3470.01	53	26	24.56	23.75	27.18	27.76	< 30.00
		1	1	24.68	24.01	27.37	27.95	< 30.00
		1	104	24.58	23.77	27.20	27.78	< 30.00
		106	0	22.08	21.30	24.72	25.30	< 30.00
		1	0	19.74	19.09	22.44	23.02	< 30.00
		1	105	19.58	18.86	22.25	22.83	< 30.00
40	3500.01	53	26	24.42	23.71	27.09	27.67	< 30.00
		1	1	24.90	24.06	27.51	28.09	< 30.00
		1	104	24.54	23.80	27.20	27.78	< 30.00
		106	0	22.04	21.31	24.70	25.28	< 30.00
		1	0	19.77	18.02	21.99	22.57	< 30.00
		1	105	19.52	18.86	22.21	22.79	< 30.00
40	3529.98	53	26	24.41	23.62	27.04	27.62	< 30.00
		1	1	24.47	23.82	27.17	27.75	< 30.00
		1	104	24.54	23.83	27.21	27.79	< 30.00
		106	0	21.93	21.23	24.60	25.18	< 30.00
		1	0	19.55	19.07	22.33	22.91	< 30.00
		1	105	19.51	18.72	22.14	22.72	< 30.00
50	3475.02	67	33	24.23	23.45	26.87	27.45	< 30.00
		1	1	24.48	23.71	27.12	27.70	< 30.00
		1	131	24.14	23.40	26.80	27.38	< 30.00
		133	0	21.90	21.01	24.49	25.07	< 30.00
		1	0	19.55	18.85	22.22	22.80	< 30.00
		1	132	19.25	18.38	21.85	22.43	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM QPSK								
50	3500.01	67	33	24.31	23.45	26.91	27.49	< 30.00
		1	1	24.62	23.66	27.18	27.76	< 30.00
		1	131	24.22	23.24	26.77	27.35	< 30.00
		133	0	21.92	21.08	24.53	25.11	< 30.00
		1	0	19.67	18.66	22.20	22.78	< 30.00
		1	132	19.31	18.24	21.82	22.40	< 30.00
50	3525.00	67	33	24.29	23.34	26.85	27.43	< 30.00
		1	1	24.41	23.47	26.98	27.56	< 30.00
		1	131	24.34	23.31	26.87	27.45	< 30.00
		133	0	21.85	20.94	24.43	25.01	< 30.00
		1	0	19.51	18.69	22.13	22.71	< 30.00
		1	132	19.23	18.28	21.79	22.37	< 30.00
60	3480.00	81	40	24.43	23.46	26.98	27.56	< 30.00
		1	1	24.49	23.64	27.10	27.68	< 30.00
		1	160	24.26	23.35	26.84	27.42	< 30.00
		162	0	21.98	21.02	24.54	25.12	< 30.00
		1	0	19.54	18.58	22.10	22.68	< 30.00
		1	161	19.25	18.43	21.87	22.45	< 30.00
60	3500.01	81	40	24.38	23.44	26.95	27.53	< 30.00
		1	1	24.55	23.57	27.10	27.68	< 30.00
		1	160	24.38	23.38	26.92	27.50	< 30.00
		162	0	21.98	21.08	24.56	25.14	< 30.00
		1	0	19.63	18.78	22.24	22.82	< 30.00
		1	161	19.39	18.46	21.96	22.54	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM QPSK								
60	3519.99	81	40	24.38	24.32	27.36	27.94	< 30.00
		1	1	24.54	23.56	27.09	27.67	< 30.00
		1	160	24.30	23.33	26.85	27.43	< 30.00
		162	0	21.95	20.94	24.48	25.06	< 30.00
		1	0	19.76	18.70	22.27	22.85	< 30.00
		1	161	19.31	18.37	21.88	22.46	< 30.00
70	3485.01	95	47	24.23	23.40	26.85	27.43	< 30.00
		1	1	24.41	23.54	27.01	27.59	< 30.00
		1	187	24.13	23.19	26.70	27.28	< 30.00
		189	0	21.76	20.89	24.36	24.94	< 30.00
		1	0	19.36	18.70	22.05	22.63	< 30.00
		1	188	19.01	18.18	21.63	22.21	< 30.00
70	3500.01	95	47	24.17	23.31	26.77	27.35	< 30.00
		1	1	24.38	23.59	27.01	27.59	< 30.00
		1	187	24.22	23.40	26.84	27.42	< 30.00
		189	0	21.74	20.94	24.37	24.95	< 30.00
		1	0	19.62	18.55	22.13	22.71	< 30.00
		1	188	19.18	18.29	21.77	22.35	< 30.00
70	3514.98	95	47	24.22	23.40	26.84	27.42	< 30.00
		1	1	24.54	23.48	27.05	27.63	< 30.00
		1	187	24.25	23.27	26.80	27.38	< 30.00
		189	0	21.79	20.91	24.38	24.96	< 30.00
		1	0	19.59	18.67	22.16	22.74	< 30.00
		1	188	19.22	18.16	21.73	22.31	< 30.00

Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$

Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM QPSK								
80	3490.02	109	54	24.19	23.38	26.81	27.39	< 30.00
		1	1	24.46	23.39	26.97	27.55	< 30.00
		1	215	24.18	23.27	26.76	27.34	< 30.00
		217	0	21.63	20.94	24.31	24.89	< 30.00
		1	0	19.32	18.72	22.04	22.62	< 30.00
		1	216	19.02	18.27	21.67	22.25	< 30.00
80	3500.01	109	54	24.22	23.36	26.82	27.40	< 30.00
		1	1	24.50	23.53	27.05	27.63	< 30.00
		1	215	24.06	23.34	26.73	27.31	< 30.00
		217	0	21.67	20.90	24.31	24.89	< 30.00
		1	0	19.51	18.74	22.15	22.73	< 30.00
		1	216	19.01	18.21	21.64	22.22	< 30.00
80	3510.00	109	54	24.08	23.28	26.71	27.29	< 30.00
		1	1	24.48	23.50	27.03	27.61	< 30.00
		1	215	24.17	23.26	26.75	27.33	< 30.00
		217	0	21.77	20.84	24.34	24.92	< 30.00
		1	0	19.42	18.52	22.00	22.58	< 30.00
		1	216	19.13	18.12	21.66	22.24	< 30.00
90	3495.00	123	61	24.10	23.34	26.75	27.33	< 30.00
		1	1	24.47	23.65	27.09	27.67	< 30.00
		1	243	24.05	23.30	26.70	27.28	< 30.00
		245	0	21.64	20.89	24.29	24.87	< 30.00
		1	0	19.33	18.70	22.04	22.62	< 30.00
		1	244	19.07	18.32	21.72	22.30	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM QPSK								
90	3500.01	123	61	24.19	23.22	26.74	27.32	< 30.00
		1	1	24.25	23.52	26.91	27.49	< 30.00
		1	243	23.97	23.26	26.64	27.22	< 30.00
		245	0	21.67	20.90	24.31	24.89	< 30.00
		1	0	19.37	18.71	22.06	22.64	< 30.00
		1	244	19.14	18.25	21.73	22.31	< 30.00
90	3504.99	123	61	24.14	23.37	26.78	27.36	< 30.00
		1	1	24.53	23.46	27.04	27.62	< 30.00
		1	243	23.91	23.18	26.57	27.15	< 30.00
		245	0	21.76	20.89	24.36	24.94	< 30.00
		1	0	19.54	18.62	22.11	22.69	< 30.00
		1	244	19.20	18.26	21.77	22.35	< 30.00
100	3500.01	137	68	24.15	23.21	26.72	27.30	< 30.00
		1	1	24.32	23.36	26.88	27.46	< 30.00
		1	271	24.03	23.15	26.62	27.20	< 30.00
		273	0	21.75	20.81	24.32	24.90	< 30.00
		1	0	19.47	18.60	22.07	22.65	< 30.00
		1	272	19.01	18.19	21.63	22.21	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{\text{Port 0 Output Power} / 10} + 10^{\text{Port 1 Output Power} / 10}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Test Site	WZ-SR6	Test Engineer	Cloud Guo
Test Date	2023/04/03 ~ 2023/04/08	Test Band	n77/n78_UL MIMO (3700 ~ 3980MHz)

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM PI/2 BPSK								
10	3705.00	12	6	25.70	25.03	28.39	28.97	< 30.00
		1	1	25.63	24.82	28.25	28.83	< 30.00
		1	22	25.66	24.97	28.34	28.92	< 30.00
		24	0	24.21	23.42	26.84	27.42	< 30.00
		1	0	19.62	18.91	22.29	22.87	< 30.00
		1	23	19.66	19.02	22.36	22.94	< 30.00
10	3840.00	12	6	25.40	25.01	28.22	28.80	< 30.00
		1	1	25.38	24.92	28.17	28.75	< 30.00
		1	22	25.33	24.90	28.13	28.71	< 30.00
		24	0	23.88	23.49	26.70	27.28	< 30.00
		1	0	19.42	18.95	22.20	22.78	< 30.00
		1	23	19.42	18.89	22.17	22.75	< 30.00
10	3975.00	12	6	25.76	25.01	28.41	28.99	< 30.00
		1	1	25.77	24.94	28.39	28.97	< 30.00
		1	22	25.73	25.04	28.41	28.99	< 30.00
		24	0	24.26	23.59	26.95	27.53	< 30.00
		1	0	19.73	19.01	22.40	22.98	< 30.00
		1	23	19.65	18.95	22.32	22.90	< 30.00
15	3707.52	18	9	25.61	24.76	28.22	28.80	< 30.00
		1	1	25.49	24.73	28.14	28.72	< 30.00
		1	36	25.61	24.78	28.23	28.81	< 30.00
		36	0	24.02	23.27	26.67	27.25	< 30.00
		1	0	19.63	18.73	22.21	22.79	< 30.00
		1	37	19.57	18.87	22.24	22.82	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{\text{Port 0 Output Power} / 10} + 10^{\text{Port 1 Output Power} / 10}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM PI/2 BPSK								
15	3840.00	18	9	25.68	25.23	28.47	29.05	< 30.00
		1	1	25.60	25.19	28.41	28.99	< 30.00
		1	36	25.74	25.24	28.51	29.09	< 30.00
		36	0	24.21	23.74	26.99	27.57	< 30.00
		1	0	19.74	19.25	22.51	23.09	< 30.00
		1	37	19.68	19.20	22.46	23.04	< 30.00
15	3972.48	18	9	25.94	25.08	28.54	29.12	< 30.00
		1	1	25.87	25.10	28.51	29.09	< 30.00
		1	36	25.91	25.09	28.53	29.11	< 30.00
		36	0	24.42	23.61	27.04	27.62	< 30.00
		1	0	19.89	19.07	22.51	23.09	< 30.00
		1	37	19.91	19.05	22.51	23.09	< 30.00
20	3710.01	25	12	25.64	24.80	28.25	28.83	< 30.00
		1	1	25.59	24.73	28.19	28.77	< 30.00
		1	49	25.62	24.88	28.28	28.86	< 30.00
		50	0	24.13	23.32	26.75	27.33	< 30.00
		1	0	19.56	18.73	22.18	22.76	< 30.00
		1	50	19.60	18.91	22.28	22.86	< 30.00
20	3840.00	25	12	25.82	25.33	28.59	29.17	< 30.00
		1	1	25.65	25.22	28.45	29.03	< 30.00
		1	49	25.74	25.29	28.53	29.11	< 30.00
		50	0	24.28	23.86	27.09	27.67	< 30.00
		1	0	19.77	19.31	22.56	23.14	< 30.00
		1	50	19.76	19.24	22.52	23.10	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM PI/2 BPSK								
20	3969.99	25	12	25.93	25.20	28.59	29.17	< 30.00
		1	1	25.93	25.12	28.55	29.13	< 30.00
		1	49	25.98	25.18	28.61	29.19	< 30.00
		50	0	24.50	23.70	27.13	27.71	< 30.00
		1	0	19.98	19.12	22.58	23.16	< 30.00
		1	50	19.96	19.17	22.59	23.17	< 30.00
30	3715.02	36	18	25.74	24.87	28.34	28.92	< 30.00
		1	1	25.60	24.84	28.25	28.83	< 30.00
		1	76	25.72	25.07	28.42	29.00	< 30.00
		75	0	24.25	23.45	26.88	27.46	< 30.00
		1	0	19.74	18.85	22.33	22.91	< 30.00
		1	77	19.76	19.08	22.44	23.02	< 30.00
30	3840.00	36	18	25.78	25.36	28.59	29.17	< 30.00
		1	1	25.73	25.30	28.53	29.11	< 30.00
		1	76	25.74	25.28	28.53	29.11	< 30.00
		75	0	24.32	23.88	27.12	27.70	< 30.00
		1	0	19.82	19.40	22.63	23.21	< 30.00
		1	77	19.79	19.28	22.55	23.13	< 30.00
30	3964.98	36	18	25.93	25.20	28.59	29.17	< 30.00
		1	1	26.00	25.13	28.60	29.18	< 30.00
		1	76	25.92	25.22	28.59	29.17	< 30.00
		75	0	24.48	23.75	27.14	27.72	< 30.00
		1	0	20.02	19.25	22.66	23.24	< 30.00
		1	77	19.95	19.20	22.60	23.18	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM PI/2 BPSK								
40	3720.00	50	25	25.36	24.60	28.01	28.59	< 30.00
		1	1	25.45	24.58	28.05	28.63	< 30.00
		1	104	25.46	24.76	28.13	28.71	< 30.00
		100	0	23.98	23.19	26.61	27.19	< 30.00
		1	0	19.55	18.75	22.18	22.76	< 30.00
		1	105	19.55	18.82	22.21	22.79	< 30.00
40	3840.00	50	25	25.63	25.12	28.39	28.97	< 30.00
		1	1	25.63	25.29	28.47	29.05	< 30.00
		1	104	25.53	25.09	28.33	28.91	< 30.00
		100	0	24.10	23.68	26.91	27.49	< 30.00
		1	0	19.77	19.41	22.60	23.18	< 30.00
		1	105	19.61	19.23	22.43	23.01	< 30.00
40	3960.00	50	25	25.91	25.14	28.55	29.13	< 30.00
		1	1	26.01	25.16	28.62	29.20	< 30.00
		1	104	25.95	25.27	28.63	29.21	< 30.00
		100	0	24.42	23.62	27.05	27.63	< 30.00
		1	0	20.08	19.18	22.66	23.24	< 30.00
		1	105	19.90	19.23	22.59	23.17	< 30.00
50	3720.00	64	32	25.72	24.98	28.38	28.96	< 30.00
		1	1	25.54	24.75	28.17	28.75	< 30.00
		1	131	25.62	24.94	28.30	28.88	< 30.00
		128	0	24.16	23.42	26.82	27.40	< 30.00
		1	0	19.54	18.71	22.16	22.74	< 30.00
		1	132	19.37	18.71	22.06	22.64	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM PI/2 BPSK								
50	3840.00	64	32	25.60	25.23	28.43	29.01	< 30.00
		1	1	25.51	25.13	28.33	28.91	< 30.00
		1	131	25.47	25.02	28.26	28.84	< 30.00
		128	0	24.04	23.65	26.86	27.44	< 30.00
		1	0	19.61	19.27	22.45	23.03	< 30.00
		1	132	19.58	19.13	22.37	22.95	< 30.00
50	3954.99	64	32	25.78	24.98	28.41	28.99	< 30.00
		1	1	25.94	24.92	28.47	29.05	< 30.00
		1	131	25.65	25.02	28.36	28.94	< 30.00
		128	0	24.30	23.59	26.97	27.55	< 30.00
		1	0	19.90	18.99	22.48	23.06	< 30.00
		1	132	19.68	19.03	22.38	22.96	< 30.00
60	3730.02	81	40	25.43	24.72	28.10	28.68	< 30.00
		1	1	25.30	24.51	27.93	28.51	< 30.00
		1	160	25.36	24.74	28.07	28.65	< 30.00
		162	0	23.96	23.23	26.62	27.20	< 30.00
		1	0	19.47	18.67	22.10	22.68	< 30.00
		1	161	19.44	18.74	22.11	22.69	< 30.00
60	3840.00	81	40	25.65	25.23	28.46	29.04	< 30.00
		1	1	25.55	25.20	28.39	28.97	< 30.00
		1	160	25.49	25.08	28.30	28.88	< 30.00
		162	0	24.16	23.77	26.98	27.56	< 30.00
		1	0	19.62	19.30	22.47	23.05	< 30.00
		1	161	19.58	19.13	22.37	22.95	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM PI/2 BPSK								
60	3949.98	81	40	25.55	25.04	28.31	28.89	< 30.00
		1	1	25.78	25.10	28.46	29.04	< 30.00
		1	160	25.47	25.05	28.28	28.86	< 30.00
		162	0	24.12	23.60	26.88	27.46	< 30.00
		1	0	19.76	19.07	22.44	23.02	< 30.00
		1	161	19.37	19.07	22.23	22.81	< 30.00
70	3735.00	90	45	25.54	24.84	28.21	28.79	< 30.00
		1	1	25.35	24.62	28.01	28.59	< 30.00
		1	187	25.38	24.76	28.09	28.67	< 30.00
		180	0	23.94	23.32	26.65	27.23	< 30.00
		1	0	19.60	18.74	22.20	22.78	< 30.00
		1	188	19.35	18.73	22.06	22.64	< 30.00
70	3840.00	90	45	25.56	25.07	28.33	28.91	< 30.00
		1	1	25.45	25.12	28.30	28.88	< 30.00
		1	187	25.31	24.84	28.09	28.67	< 30.00
		180	0	23.95	23.68	26.83	27.41	< 30.00
		1	0	19.46	19.36	22.42	23.00	< 30.00
		1	188	19.29	18.97	22.14	22.72	< 30.00
70	3945.00	90	45	25.69	25.10	28.42	29.00	< 30.00
		1	1	25.82	25.02	28.45	29.03	< 30.00
		1	187	25.34	25.01	28.19	28.77	< 30.00
		180	0	24.10	23.63	26.88	27.46	< 30.00
		1	0	19.84	19.16	22.52	23.10	< 30.00
		1	188	19.37	19.06	22.23	22.81	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM PI/2 BPSK								
80	3740.01	108	54	25.55	24.91	28.25	28.83	< 30.00
		1	1	25.33	24.56	27.97	28.55	< 30.00
		1	215	25.41	24.77	28.11	28.69	< 30.00
		216	0	24.01	23.25	26.66	27.24	< 30.00
		1	0	19.52	18.67	22.13	22.71	< 30.00
		1	216	19.37	18.71	22.06	22.64	< 30.00
80	3840.00	108	54	25.51	25.08	28.31	28.89	< 30.00
		1	1	25.40	25.11	28.27	28.85	< 30.00
		1	215	25.44	24.97	28.22	28.80	< 30.00
		216	0	24.03	23.61	26.84	27.42	< 30.00
		1	0	19.52	19.20	22.37	22.95	< 30.00
		1	216	19.43	18.94	22.20	22.78	< 30.00
80	3939.99	108	54	25.57	25.09	28.35	28.93	< 30.00
		1	1	25.73	25.01	28.40	28.98	< 30.00
		1	215	25.33	25.04	28.20	28.78	< 30.00
		216	0	24.19	23.58	26.91	27.49	< 30.00
		1	0	19.79	19.14	22.49	23.07	< 30.00
		1	216	19.26	19.04	22.16	22.74	< 30.00
90	3745.02	120	60	25.56	24.89	28.25	28.83	< 30.00
		1	1	25.26	24.58	27.94	28.52	< 30.00
		1	243	25.53	24.82	28.20	28.78	< 30.00
		243	0	24.03	23.29	26.69	27.27	< 30.00
		1	0	19.62	18.88	22.28	22.86	< 30.00
		1	244	19.52	18.86	22.21	22.79	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM PI/2 BPSK								
90	3840.00	120	60	25.49	25.09	28.30	28.88	< 30.00
		1	1	25.30	25.04	28.18	28.76	< 30.00
		1	243	25.54	24.96	28.27	28.85	< 30.00
		243	0	24.07	23.72	26.91	27.49	< 30.00
		1	0	19.42	19.23	22.34	22.92	< 30.00
		1	244	19.53	19.01	22.29	22.87	< 30.00
90	3934.98	120	60	25.72	25.07	28.42	29.00	< 30.00
		1	1	25.71	24.99	28.38	28.96	< 30.00
		1	243	25.35	25.02	28.20	28.78	< 30.00
		243	0	24.15	23.61	26.90	27.48	< 30.00
		1	0	19.88	19.14	22.54	23.12	< 30.00
		1	244	19.40	19.07	22.25	22.83	< 30.00
100	3750.00	135	67	25.59	24.91	28.27	28.85	< 30.00
		1	1	25.28	24.59	27.96	28.54	< 30.00
		1	271	25.64	24.95	28.32	28.90	< 30.00
		270	0	24.07	23.31	26.72	27.30	< 30.00
		1	0	19.57	18.82	22.22	22.80	< 30.00
		1	272	19.59	18.89	22.26	22.84	< 30.00
100	3840.00	135	67	25.59	25.16	28.39	28.97	< 30.00
		1	1	25.36	25.09	28.24	28.82	< 30.00
		1	271	25.52	25.03	28.29	28.87	< 30.00
		270	0	24.03	23.60	26.83	27.41	< 30.00
		1	0	19.40	19.13	22.28	22.86	< 30.00
		1	272	19.52	18.99	22.27	22.85	< 30.00
100	3930.00	135	67	25.69	25.14	28.43	29.01	< 30.00
		1	1	25.71	25.03	28.39	28.97	< 30.00
		1	271	25.41	25.22	28.33	28.91	< 30.00
		270	0	24.21	23.58	26.92	27.50	< 30.00
		1	0	19.90	19.08	22.52	23.10	< 30.00
		1	272	19.41	19.16	22.30	22.88	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{\text{Port 0 Output Power} / 10} + 10^{\text{Port 1 Output Power} / 10}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM QPSK								
10	3705.00	12	6	25.73	24.94	28.36	28.94	< 30.00
		1	1	25.60	24.84	28.25	28.83	< 30.00
		1	22	25.62	24.99	28.33	28.91	< 30.00
		24	0	23.74	22.90	26.35	26.93	< 30.00
		1	0	19.18	18.46	21.85	22.43	< 30.00
		1	23	19.17	18.50	21.86	22.44	< 30.00
10	3840.00	12	6	25.40	24.93	28.18	28.76	< 30.00
		1	1	25.35	24.91	28.15	28.73	< 30.00
		1	22	25.36	24.89	28.14	28.72	< 30.00
		24	0	23.39	22.97	26.20	26.78	< 30.00
		1	0	18.88	18.42	21.67	22.25	< 30.00
		1	23	18.95	18.36	21.68	22.26	< 30.00
10	3975.00	12	6	25.74	25.04	28.41	28.99	< 30.00
		1	1	25.71	24.89	28.33	28.91	< 30.00
		1	22	25.63	25.02	28.35	28.93	< 30.00
		24	0	23.74	23.09	26.44	27.02	< 30.00
		1	0	19.21	18.45	21.86	22.44	< 30.00
		1	23	19.13	18.39	21.79	22.37	< 30.00
15	3707.52	18	9	25.55	24.74	28.17	28.75	< 30.00
		1	1	25.48	24.74	28.14	28.72	< 30.00
		1	36	25.62	24.80	28.24	28.82	< 30.00
		36	0	23.50	22.75	26.15	26.73	< 30.00
		1	0	19.09	18.22	21.69	22.27	< 30.00
		1	37	19.05	18.36	21.73	22.31	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM QPSK								
15	3840.00	18	9	25.67	25.17	28.44	29.02	< 30.00
		1	1	25.58	25.18	28.39	28.97	< 30.00
		1	36	25.71	25.25	28.50	29.08	< 30.00
		36	0	23.76	23.28	26.54	27.12	< 30.00
		1	0	19.09	18.64	21.88	22.46	< 30.00
		1	37	19.12	18.64	21.90	22.48	< 30.00
15	3972.48	18	9	25.87	25.08	28.50	29.08	< 30.00
		1	1	25.82	25.04	28.46	29.04	< 30.00
		1	36	25.78	25.11	28.47	29.05	< 30.00
		36	0	23.91	23.11	26.54	27.12	< 30.00
		1	0	19.38	18.53	21.99	22.57	< 30.00
		1	37	19.41	18.60	22.03	22.61	< 30.00
20	3710.01	25	12	25.61	24.82	28.24	28.82	< 30.00
		1	1	25.57	24.67	28.15	28.73	< 30.00
		1	49	25.64	24.91	28.30	28.88	< 30.00
		50	0	23.69	22.79	26.27	26.85	< 30.00
		1	0	19.09	18.33	21.74	22.32	< 30.00
		1	50	19.11	18.41	21.78	22.36	< 30.00
20	3840.00	25	12	25.75	25.31	28.55	29.13	< 30.00
		1	1	25.78	25.30	28.56	29.14	< 30.00
		1	49	25.75	25.25	28.52	29.10	< 30.00
		50	0	23.75	23.29	26.54	27.12	< 30.00
		1	0	19.24	18.78	22.03	22.61	< 30.00
		1	50	19.20	18.69	21.96	22.54	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM QPSK								
20	3969.99	25	12	25.91	25.22	28.59	29.17	< 30.00
		1	1	25.94	25.06	28.53	29.11	< 30.00
		1	49	25.88	25.23	28.58	29.16	< 30.00
		50	0	23.93	23.26	26.62	27.20	< 30.00
		1	0	19.42	18.63	22.05	22.63	< 30.00
		1	50	19.36	18.70	22.05	22.63	< 30.00
30	3715.02	36	18	25.70	24.91	28.33	28.91	< 30.00
		1	1	25.59	24.83	28.24	28.82	< 30.00
		1	76	25.78	25.04	28.44	29.02	< 30.00
		75	0	23.76	22.93	26.38	26.96	< 30.00
		1	0	19.31	18.41	21.89	22.47	< 30.00
		1	77	19.31	18.60	21.98	22.56	< 30.00
30	3840.00	36	18	25.74	25.34	28.55	29.13	< 30.00
		1	1	25.72	25.28	28.52	29.10	< 30.00
		1	76	25.71	25.23	28.49	29.07	< 30.00
		75	0	23.81	23.35	26.60	27.18	< 30.00
		1	0	19.27	18.90	22.10	22.68	< 30.00
		1	77	19.22	18.68	21.97	22.55	< 30.00
30	3964.98	36	18	25.92	25.17	28.57	29.15	< 30.00
		1	1	26.01	25.14	28.61	29.19	< 30.00
		1	76	25.90	25.16	28.56	29.14	< 30.00
		75	0	23.95	23.22	26.61	27.19	< 30.00
		1	0	19.44	18.67	22.08	22.66	< 30.00
		1	77	19.43	18.65	22.07	22.65	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM QPSK								
40	3720.00	50	25	25.33	24.53	27.96	28.54	< 30.00
		1	1	25.44	24.55	28.03	28.61	< 30.00
		1	104	25.47	24.72	28.12	28.70	< 30.00
		100	0	23.48	22.69	26.11	26.69	< 30.00
		1	0	19.05	18.25	21.68	22.26	< 30.00
		1	105	19.06	18.30	21.71	22.29	< 30.00
40	3840.00	50	25	25.58	25.12	28.37	28.95	< 30.00
		1	1	25.67	25.23	28.47	29.05	< 30.00
		1	104	25.54	25.09	28.33	28.91	< 30.00
		100	0	23.63	23.17	26.42	27.00	< 30.00
		1	0	19.24	18.85	22.06	22.64	< 30.00
		1	105	19.11	18.64	21.89	22.47	< 30.00
40	3960.00	50	25	25.79	25.13	28.48	29.06	< 30.00
		1	1	25.97	25.12	28.58	29.16	< 30.00
		1	104	25.89	25.26	28.60	29.18	< 30.00
		100	0	23.90	23.16	26.56	27.14	< 30.00
		1	0	19.50	18.63	22.10	22.68	< 30.00
		1	105	19.42	18.68	22.08	22.66	< 30.00
50	3720.00	64	32	25.70	24.95	28.35	28.93	< 30.00
		1	1	25.53	24.75	28.17	28.75	< 30.00
		1	131	25.62	24.95	28.31	28.89	< 30.00
		128	0	23.67	22.94	26.33	26.91	< 30.00
		1	0	18.98	18.13	21.59	22.17	< 30.00
		1	132	18.81	18.17	21.51	22.09	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM QPSK								
50	3840.00	64	32	25.56	25.18	28.38	28.96	< 30.00
		1	1	25.57	25.12	28.36	28.94	< 30.00
		1	131	25.42	25.06	28.25	28.83	< 30.00
		128	0	23.52	23.14	26.34	26.92	< 30.00
		1	0	19.04	18.67	21.87	22.45	< 30.00
		1	132	19.04	18.61	21.84	22.42	< 30.00
50	3954.99	64	32	25.80	24.98	28.42	29.00	< 30.00
		1	1	25.77	24.92	28.38	28.96	< 30.00
		1	131	25.61	25.03	28.34	28.92	< 30.00
		128	0	23.73	23.11	26.44	27.02	< 30.00
		1	0	19.34	18.37	21.89	22.47	< 30.00
		1	132	19.12	18.49	21.83	22.41	< 30.00
60	3730.02	81	40	25.40	24.73	28.09	28.67	< 30.00
		1	1	23.34	24.49	26.96	27.54	< 30.00
		1	160	25.37	24.72	28.07	28.65	< 30.00
		162	0	23.44	22.73	26.11	26.69	< 30.00
		1	0	18.98	18.17	21.60	22.18	< 30.00
		1	161	18.82	18.20	21.53	22.11	< 30.00
60	3840.00	81	40	25.62	25.19	28.42	29.00	< 30.00
		1	1	25.54	25.16	28.36	28.94	< 30.00
		1	160	25.51	25.06	28.30	28.88	< 30.00
		162	0	23.66	23.24	26.47	27.05	< 30.00
		1	0	19.08	18.80	21.95	22.53	< 30.00
		1	161	19.05	18.62	21.85	22.43	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM QPSK								
60	3949.98	81	40	25.56	25.03	28.31	28.89	< 30.00
		1	1	25.70	25.10	28.42	29.00	< 30.00
		1	160	25.39	25.08	28.25	28.83	< 30.00
		162	0	23.60	23.11	26.37	26.95	< 30.00
		1	0	19.25	18.58	21.94	22.52	< 30.00
		1	161	18.88	18.54	21.72	22.30	< 30.00
70	3735.00	90	45	25.51	24.80	28.18	28.76	< 30.00
		1	1	25.29	24.55	27.95	28.53	< 30.00
		1	187	25.36	24.74	28.07	28.65	< 30.00
		180	0	23.43	22.80	26.14	26.72	< 30.00
		1	0	19.04	18.24	21.67	22.25	< 30.00
		1	188	18.84	18.27	21.57	22.15	< 30.00
70	3840.00	90	45	25.50	25.05	28.29	28.87	< 30.00
		1	1	25.38	25.09	28.25	28.83	< 30.00
		1	187	25.33	24.81	28.09	28.67	< 30.00
		180	0	23.44	23.19	26.33	26.91	< 30.00
		1	0	18.94	18.76	21.86	22.44	< 30.00
		1	188	18.82	18.43	21.64	22.22	< 30.00
70	3945.00	90	45	25.56	25.10	28.35	28.93	< 30.00
		1	1	25.84	25.04	28.47	29.05	< 30.00
		1	187	25.25	24.97	28.12	28.70	< 30.00
		180	0	23.65	23.10	26.39	26.97	< 30.00
		1	0	19.32	18.67	22.02	22.60	< 30.00
		1	188	18.82	18.53	21.69	22.27	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM QPSK								
80	3740.01	108	54	25.51	24.78	28.17	28.75	< 30.00
		1	1	25.26	24.56	27.93	28.51	< 30.00
		1	215	25.44	24.78	28.13	28.71	< 30.00
		216	0	23.52	22.75	26.16	26.74	< 30.00
		1	0	18.97	18.22	21.62	22.20	< 30.00
		1	216	18.88	18.24	21.58	22.16	< 30.00
80	3840.00	108	54	25.56	25.08	28.34	28.92	< 30.00
		1	1	25.40	25.08	28.25	28.83	< 30.00
		1	215	25.41	25.00	28.22	28.80	< 30.00
		216	0	23.54	23.10	26.34	26.92	< 30.00
		1	0	18.98	18.67	21.84	22.42	< 30.00
		1	216	18.91	18.43	21.69	22.27	< 30.00
80	3939.99	108	54	25.61	25.11	28.38	28.96	< 30.00
		1	1	25.72	25.04	28.40	28.98	< 30.00
		1	215	25.39	25.12	28.27	28.85	< 30.00
		216	0	23.68	23.04	26.38	26.96	< 30.00
		1	0	19.28	18.56	21.95	22.53	< 30.00
		1	216	18.82	18.48	21.66	22.24	< 30.00
90	3745.02	120	60	25.56	24.96	28.28	28.86	< 30.00
		1	1	25.34	24.59	27.99	28.57	< 30.00
		1	243	25.54	24.80	28.20	28.78	< 30.00
		243	0	23.53	22.79	26.19	26.77	< 30.00
		1	0	19.01	18.31	21.68	22.26	< 30.00
		1	244	19.04	18.33	21.71	22.29	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM QPSK								
90	3840.00	120	60	25.58	25.14	28.38	28.96	< 30.00
		1	1	25.34	25.01	28.19	28.77	< 30.00
		1	243	25.44	24.97	28.22	28.80	< 30.00
		243	0	23.45	23.18	26.33	26.91	< 30.00
		1	0	18.87	18.70	21.80	22.38	< 30.00
		1	244	19.01	18.52	21.78	22.36	< 30.00
90	3934.98	120	60	25.62	25.03	28.35	28.93	< 30.00
		1	1	25.68	24.91	28.32	28.90	< 30.00
		1	243	25.32	25.07	28.21	28.79	< 30.00
		243	0	23.57	23.10	26.35	26.93	< 30.00
		1	0	19.34	18.65	22.02	22.60	< 30.00
		1	244	18.85	18.57	21.72	22.30	< 30.00
100	3750.00	135	67	25.52	24.92	28.24	28.82	< 30.00
		1	1	25.33	24.55	27.97	28.55	< 30.00
		1	271	25.63	24.95	28.31	28.89	< 30.00
		270	0	23.57	22.82	26.22	26.80	< 30.00
		1	0	19.04	18.28	21.69	22.27	< 30.00
		1	272	19.04	18.36	21.72	22.30	< 30.00
100	3840.00	135	67	25.58	25.19	28.40	28.98	< 30.00
		1	1	25.32	25.04	28.19	28.77	< 30.00
		1	271	25.51	25.04	28.29	28.87	< 30.00
		270	0	25.51	23.07	27.47	28.05	< 30.00
		1	0	18.85	18.63	21.75	22.33	< 30.00
		1	272	19.01	18.48	21.76	22.34	< 30.00
100	3930.00	135	67	25.66	25.05	28.38	28.96	< 30.00
		1	1	25.70	25.02	28.38	28.96	< 30.00
		1	271	25.45	25.15	28.31	28.89	< 30.00
		270	0	23.70	23.05	26.40	26.98	< 30.00
		1	0	19.36	18.67	22.04	22.62	< 30.00
		1	272	18.86	18.62	21.75	22.33	< 30.00

Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$

Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 16QAM								
10	3705.00	12	6	24.67	23.86	27.29	27.87	< 30.00
		1	1	24.45	23.66	27.08	27.66	< 30.00
		1	22	24.67	23.97	27.34	27.92	< 30.00
		24	0	22.76	21.96	25.39	25.97	< 30.00
		1	0	19.23	18.52	21.90	22.48	< 30.00
		1	23	19.12	18.37	21.77	22.35	< 30.00
10	3840.00	12	6	24.35	23.92	27.15	27.73	< 30.00
		1	1	24.36	23.89	27.14	27.72	< 30.00
		1	22	24.14	23.68	26.93	27.51	< 30.00
		24	0	22.47	22.02	25.26	25.84	< 30.00
		1	0	18.85	18.42	21.65	22.23	< 30.00
		1	23	19.95	18.34	22.23	22.81	< 30.00
10	3975.00	12	6	24.68	23.95	27.34	27.92	< 30.00
		1	1	24.65	23.94	27.32	27.90	< 30.00
		1	22	24.67	23.92	27.32	27.90	< 30.00
		24	0	22.81	22.08	25.47	26.05	< 30.00
		1	0	19.10	18.33	21.74	22.32	< 30.00
		1	23	19.06	18.34	21.73	22.31	< 30.00
15	3707.52	18	9	24.51	23.68	27.13	27.71	< 30.00
		1	1	24.44	23.54	27.02	27.60	< 30.00
		1	36	24.54	23.70	27.15	27.73	< 30.00
		36	0	22.51	21.74	25.15	25.73	< 30.00
		1	0	19.02	18.16	21.62	22.20	< 30.00
		1	37	19.07	18.27	21.70	22.28	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 16QAM								
15	3840.00	18	9	24.65	24.25	27.46	28.04	< 30.00
		1	1	24.58	24.05	27.33	27.91	< 30.00
		1	36	24.58	24.11	27.36	27.94	< 30.00
		36	0	22.77	22.28	25.54	26.12	< 30.00
		1	0	19.10	18.62	21.88	22.46	< 30.00
		1	37	19.04	18.59	21.83	22.41	< 30.00
15	3972.48	18	9	24.84	24.04	27.47	28.05	< 30.00
		1	1	24.77	23.96	27.39	27.97	< 30.00
		1	36	24.66	23.97	27.34	27.92	< 30.00
		36	0	22.87	22.09	25.51	26.09	< 30.00
		1	0	19.39	18.57	22.01	22.59	< 30.00
		1	37	19.45	18.67	22.09	22.67	< 30.00
20	3710.01	25	12	24.66	23.79	27.26	27.84	< 30.00
		1	1	24.56	23.61	27.12	27.70	< 30.00
		1	49	24.58	23.87	27.25	27.83	< 30.00
		50	0	22.66	21.82	25.27	25.85	< 30.00
		1	0	19.14	18.26	21.73	22.31	< 30.00
		1	50	19.01	18.30	21.68	22.26	< 30.00
20	3840.00	25	12	24.76	24.29	27.54	28.12	< 30.00
		1	1	24.62	24.19	27.42	28.00	< 30.00
		1	49	24.58	24.11	27.36	27.94	< 30.00
		50	0	22.73	22.27	25.52	26.10	< 30.00
		1	0	19.10	18.63	21.88	22.46	< 30.00
		1	50	19.05	18.56	21.82	22.40	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 16QAM								
20	3969.99	25	12	24.90	24.22	27.58	28.16	< 30.00
		1	1	24.78	23.99	27.41	27.99	< 30.00
		1	49	24.95	24.09	27.55	28.13	< 30.00
		50	0	22.90	22.24	25.59	26.17	< 30.00
		1	0	19.43	18.68	22.08	22.66	< 30.00
		1	50	19.46	18.67	22.09	22.67	< 30.00
30	3715.02	36	18	24.67	23.88	27.30	27.88	< 30.00
		1	1	24.48	23.68	27.11	27.69	< 30.00
		1	76	24.70	23.92	27.34	27.92	< 30.00
		75	0	22.78	21.89	25.37	25.95	< 30.00
		1	0	19.07	18.24	21.69	22.27	< 30.00
		1	77	19.26	18.43	21.88	22.46	< 30.00
30	3840.00	36	18	24.74	24.29	27.53	28.11	< 30.00
		1	1	24.54	24.09	27.33	27.91	< 30.00
		1	76	24.56	24.11	27.35	27.93	< 30.00
		75	0	22.83	22.37	25.62	26.20	< 30.00
		1	0	19.30	18.84	22.09	22.67	< 30.00
		1	77	19.18	18.70	21.96	22.54	< 30.00
30	3964.98	36	18	24.98	24.19	27.61	28.19	< 30.00
		1	1	24.96	24.04	27.53	28.11	< 30.00
		1	76	24.83	24.07	27.48	28.06	< 30.00
		75	0	22.95	22.24	25.62	26.20	< 30.00
		1	0	19.49	18.73	22.14	22.72	< 30.00
		1	77	19.57	18.77	22.20	22.78	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 16QAM								
40	3720.00	50	25	24.33	23.58	26.98	27.56	< 30.00
		1	1	24.40	23.46	26.97	27.55	< 30.00
		1	104	24.51	23.68	27.13	27.71	< 30.00
		100	0	22.46	21.70	25.11	25.69	< 30.00
		1	0	19.13	18.34	21.76	22.34	< 30.00
		1	105	19.10	18.34	21.75	22.33	< 30.00
40	3840.00	50	25	24.54	24.13	27.35	27.93	< 30.00
		1	1	24.60	24.16	27.40	27.98	< 30.00
		1	104	24.49	24.02	27.27	27.85	< 30.00
		100	0	22.66	22.20	25.45	26.03	< 30.00
		1	0	19.28	18.91	22.11	22.69	< 30.00
		1	105	19.12	18.65	21.90	22.48	< 30.00
40	3960.00	50	25	24.82	24.08	27.48	28.06	< 30.00
		1	1	24.87	24.05	27.49	28.07	< 30.00
		1	104	24.87	24.13	27.53	28.11	< 30.00
		100	0	22.90	22.13	25.54	26.12	< 30.00
		1	0	19.47	18.62	22.08	22.66	< 30.00
		1	105	19.39	18.79	22.11	22.69	< 30.00
50	3720.00	64	32	24.70	23.94	27.35	27.93	< 30.00
		1	1	24.30	23.45	26.91	27.49	< 30.00
		1	131	24.35	23.67	27.03	27.61	< 30.00
		128	0	22.71	21.96	25.36	25.94	< 30.00
		1	0	18.94	18.08	21.54	22.12	< 30.00
		1	132	18.73	18.06	21.42	22.00	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 16QAM								
50	3840.00	64	32	24.55	24.09	27.34	27.92	< 30.00
		1	1	24.46	24.10	27.29	27.87	< 30.00
		1	131	24.46	23.99	27.24	27.82	< 30.00
		128	0	22.58	22.15	25.38	25.96	< 30.00
		1	0	19.03	18.70	21.88	22.46	< 30.00
		1	132	18.93	18.52	21.74	22.32	< 30.00
50	3954.99	64	32	24.82	24.02	27.45	28.03	< 30.00
		1	1	24.91	23.85	27.42	28.00	< 30.00
		1	131	24.51	23.93	27.24	27.82	< 30.00
		128	0	22.75	22.05	25.42	26.00	< 30.00
		1	0	19.34	18.51	21.96	22.54	< 30.00
		1	132	19.28	18.58	21.95	22.53	< 30.00
60	3730.02	81	40	24.36	23.71	27.06	27.64	< 30.00
		1	1	24.36	23.48	26.95	27.53	< 30.00
		1	160	24.22	23.56	26.91	27.49	< 30.00
		162	0	22.46	21.74	25.13	25.71	< 30.00
		1	0	18.93	18.19	21.59	22.17	< 30.00
		1	161	18.82	18.21	21.54	22.12	< 30.00
60	3840.00	81	40	24.63	24.22	27.44	28.02	< 30.00
		1	1	24.56	24.18	27.38	27.96	< 30.00
		1	160	24.34	23.87	27.12	27.70	< 30.00
		162	0	22.66	22.26	25.47	26.05	< 30.00
		1	0	19.19	18.69	21.96	22.54	< 30.00
		1	161	19.12	18.71	21.93	22.51	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 16QAM								
60	3949.98	81	40	24.54	24.04	27.31	27.89	< 30.00
		1	1	24.79	24.09	27.46	28.04	< 30.00
		1	160	24.29	24.00	27.16	27.74	< 30.00
		162	0	22.59	22.09	25.36	25.94	< 30.00
		1	0	19.23	18.52	21.90	22.48	< 30.00
		1	161	18.85	18.47	21.67	22.25	< 30.00
70	3735.00	90	45	24.49	23.90	27.22	27.80	< 30.00
		1	1	24.26	23.53	26.92	27.50	< 30.00
		1	187	24.25	23.65	26.97	27.55	< 30.00
		180	0	22.44	21.85	25.17	25.75	< 30.00
		1	0	19.05	18.13	21.62	22.20	< 30.00
		1	188	18.85	18.24	21.57	22.15	< 30.00
70	3840.00	90	45	24.52	24.10	27.33	27.91	< 30.00
		1	1	24.38	24.07	27.24	27.82	< 30.00
		1	187	24.12	23.71	26.93	27.51	< 30.00
		180	0	22.48	22.14	25.32	25.90	< 30.00
		1	0	18.99	18.77	21.89	22.47	< 30.00
		1	188	18.81	18.35	21.60	22.18	< 30.00
70	3945.00	90	45	24.61	24.07	27.36	27.94	< 30.00
		1	1	24.93	24.11	27.55	28.13	< 30.00
		1	187	24.29	23.99	27.15	27.73	< 30.00
		180	0	22.64	22.15	25.41	25.99	< 30.00
		1	0	19.26	18.58	21.94	22.52	< 30.00
		1	188	18.72	18.41	21.58	22.16	< 30.00

Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$

Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 16QAM								
80	3740.01	108	54	24.45	23.77	27.13	27.71	< 30.00
		1	1	24.21	23.47	26.87	27.45	< 30.00
		1	215	24.23	23.56	26.92	27.50	< 30.00
		216	0	22.54	21.79	25.19	25.77	< 30.00
		1	0	19.01	18.14	21.61	22.19	< 30.00
		1	216	18.92	18.24	21.60	22.18	< 30.00
80	3840.00	108	54	24.49	24.09	27.30	27.88	< 30.00
		1	1	24.36	24.03	27.21	27.79	< 30.00
		1	215	24.33	24.00	27.18	27.76	< 30.00
		216	0	22.53	22.15	25.35	25.93	< 30.00
		1	0	19.00	18.65	21.84	22.42	< 30.00
		1	216	18.78	18.33	21.57	22.15	< 30.00
80	3939.99	108	54	24.61	24.11	27.38	27.96	< 30.00
		1	1	24.77	24.01	27.42	28.00	< 30.00
		1	215	24.37	24.05	27.22	27.80	< 30.00
		216	0	22.68	22.07	25.40	25.98	< 30.00
		1	0	19.23	18.51	21.90	22.48	< 30.00
		1	216	18.76	18.41	21.60	22.18	< 30.00
90	3745.02	120	60	24.53	23.92	27.25	27.83	< 30.00
		1	1	24.24	23.50	26.90	27.48	< 30.00
		1	243	24.34	23.68	27.03	27.61	< 30.00
		243	0	22.59	21.83	25.24	25.82	< 30.00
		1	0	18.99	18.32	21.68	22.26	< 30.00
		1	244	19.00	18.22	21.64	22.22	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 16QAM								
90	3840.00	120	60	24.53	24.10	27.33	27.91	< 30.00
		1	1	24.24	24.03	27.15	27.73	< 30.00
		1	243	24.47	23.93	27.22	27.80	< 30.00
		243	0	22.45	22.19	25.33	25.91	< 30.00
		1	0	18.84	18.65	21.76	22.34	< 30.00
		1	244	18.91	18.40	21.67	22.25	< 30.00
90	3934.98	120	60	24.61	24.07	27.36	27.94	< 30.00
		1	1	24.60	23.95	27.30	27.88	< 30.00
		1	243	24.34	24.02	27.19	27.77	< 30.00
		243	0	22.66	22.14	25.42	26.00	< 30.00
		1	0	19.27	18.51	21.92	22.50	< 30.00
		1	244	18.71	18.47	21.60	22.18	< 30.00
100	3750.00	135	67	24.53	23.93	27.25	27.83	< 30.00
		1	1	24.27	23.49	26.91	27.49	< 30.00
		1	271	24.57	23.89	27.25	27.83	< 30.00
		270	0	22.57	21.82	25.22	25.80	< 30.00
		1	0	18.91	18.23	21.59	22.17	< 30.00
		1	272	18.99	18.33	21.68	22.26	< 30.00
100	3840.00	135	67	24.56	24.18	27.38	27.96	< 30.00
		1	1	24.33	23.93	27.14	27.72	< 30.00
		1	271	24.52	23.97	27.26	27.84	< 30.00
		270	0	22.55	22.11	25.35	25.93	< 30.00
		1	0	18.87	18.57	21.73	22.31	< 30.00
		1	272	18.88	18.40	21.66	22.24	< 30.00
100	3930.00	135	67	24.70	24.05	27.40	27.98	< 30.00
		1	1	24.66	23.96	27.33	27.91	< 30.00
		1	271	24.27	24.02	27.16	27.74	< 30.00
		270	0	22.67	22.08	25.40	25.98	< 30.00
		1	0	19.34	18.61	22.00	22.58	< 30.00
		1	272	18.85	18.63	21.75	22.33	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{\text{Port 0 Output Power} / 10} + 10^{\text{Port 1 Output Power} / 10}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 64QAM								
10	3705.00	12	6	22.78	22.01	25.42	26.00	< 30.00
		1	1	22.68	21.85	25.30	25.88	< 30.00
		1	22	22.85	22.08	25.49	26.07	< 30.00
		24	0	22.34	21.52	24.96	25.54	< 30.00
		1	0	19.14	18.44	21.81	22.39	< 30.00
		1	23	19.03	18.36	21.72	22.30	< 30.00
10	3840.00	12	6	22.43	21.95	25.21	25.79	< 30.00
		1	1	22.42	21.93	25.19	25.77	< 30.00
		1	22	22.54	22.02	25.30	25.88	< 30.00
		24	0	21.97	21.53	24.77	25.35	< 30.00
		1	0	18.93	18.50	21.73	22.31	< 30.00
		1	23	18.92	18.32	21.64	22.22	< 30.00
10	3975.00	12	6	22.73	22.05	25.41	25.99	< 30.00
		1	1	22.75	22.01	25.41	25.99	< 30.00
		1	22	22.65	22.05	25.37	25.95	< 30.00
		24	0	22.27	21.55	24.94	25.52	< 30.00
		1	0	19.39	18.55	22.00	22.58	< 30.00
		1	23	19.18	18.41	21.82	22.40	< 30.00
15	3707.52	18	9	22.58	21.74	25.19	25.77	< 30.00
		1	1	22.42	21.62	25.05	25.63	< 30.00
		1	36	22.60	21.81	25.23	25.81	< 30.00
		36	0	22.06	21.32	24.72	25.30	< 30.00
		1	0	19.10	18.23	21.70	22.28	< 30.00
		1	37	19.19	18.62	21.92	22.50	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 64QAM								
15	3840.00	18	9	22.63	22.27	25.46	26.04	< 30.00
		1	1	22.56	22.14	25.37	25.95	< 30.00
		1	36	22.71	22.22	25.48	26.06	< 30.00
		36	0	22.29	21.82	25.07	25.65	< 30.00
		1	0	19.22	18.79	22.02	22.60	< 30.00
		1	37	19.14	18.62	21.90	22.48	< 30.00
15	3972.48	18	9	22.91	22.06	25.52	26.10	< 30.00
		1	1	22.91	22.02	25.50	26.08	< 30.00
		1	36	22.90	22.21	25.58	26.16	< 30.00
		36	0	22.41	21.66	25.06	25.64	< 30.00
		1	0	19.39	18.55	22.00	22.58	< 30.00
		1	37	19.42	18.61	22.04	22.62	< 30.00
20	3710.01	25	12	22.66	21.80	25.26	25.84	< 30.00
		1	1	22.55	21.82	25.21	25.79	< 30.00
		1	49	22.54	21.81	25.20	25.78	< 30.00
		50	0	22.16	21.36	24.79	25.37	< 30.00
		1	0	18.99	18.22	21.63	22.21	< 30.00
		1	50	19.11	18.39	21.78	22.36	< 30.00
20	3840.00	25	12	22.74	22.32	25.55	26.13	< 30.00
		1	1	22.63	22.22	25.44	26.02	< 30.00
		1	49	22.52	22.07	25.31	25.89	< 30.00
		50	0	22.26	21.79	25.04	25.62	< 30.00
		1	0	19.28	18.85	22.08	22.66	< 30.00
		1	50	19.21	18.66	21.95	22.53	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 64QAM								
20	3969.99	25	12	22.88	22.19	25.56	26.14	< 30.00
		1	1	22.85	22.01	25.46	26.04	< 30.00
		1	49	23.04	22.22	25.66	26.24	< 30.00
		50	0	22.44	21.71	25.10	25.68	< 30.00
		1	0	19.42	18.61	22.04	22.62	< 30.00
		1	50	19.52	18.70	22.14	22.72	< 30.00
30	3715.02	36	18	22.73	21.85	25.32	25.90	< 30.00
		1	1	22.66	21.88	25.30	25.88	< 30.00
		1	76	22.85	22.16	25.53	26.11	< 30.00
		75	0	22.25	21.47	24.89	25.47	< 30.00
		1	0	19.20	18.33	21.80	22.38	< 30.00
		1	77	19.10	18.41	21.78	22.36	< 30.00
30	3840.00	36	18	22.82	22.39	25.62	26.20	< 30.00
		1	1	22.90	22.43	25.68	26.26	< 30.00
		1	76	22.85	22.42	25.65	26.23	< 30.00
		75	0	22.33	21.87	25.12	25.70	< 30.00
		1	0	19.38	19.01	22.21	22.79	< 30.00
		1	77	19.30	18.77	22.05	22.63	< 30.00
30	3964.98	36	18	23.06	22.18	25.65	26.23	< 30.00
		1	1	22.98	22.11	25.58	26.16	< 30.00
		1	76	22.89	22.14	25.54	26.12	< 30.00
		75	0	22.47	21.70	25.11	25.69	< 30.00
		1	0	19.60	18.75	22.21	22.79	< 30.00
		1	77	19.48	18.73	22.13	22.71	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 64QAM								
40	3720.00	50	25	22.37	21.56	24.99	25.57	< 30.00
		1	1	22.29	21.47	24.91	25.49	< 30.00
		1	104	22.49	21.73	25.14	25.72	< 30.00
		100	0	21.99	21.23	24.64	25.22	< 30.00
		1	0	19.14	18.33	21.76	22.34	< 30.00
		1	105	19.15	18.36	21.78	22.36	< 30.00
40	3840.00	50	25	22.64	22.17	25.42	26.00	< 30.00
		1	1	22.67	22.20	25.45	26.03	< 30.00
		1	104	22.56	22.06	25.33	25.91	< 30.00
		100	0	22.20	21.69	24.96	25.54	< 30.00
		1	0	19.32	18.87	22.11	22.69	< 30.00
		1	105	19.21	18.71	21.98	22.56	< 30.00
40	3960.00	50	25	22.80	22.09	25.47	26.05	< 30.00
		1	1	22.90	22.07	25.52	26.10	< 30.00
		1	104	22.98	22.25	25.64	26.22	< 30.00
		100	0	22.40	21.65	25.05	25.63	< 30.00
		1	0	19.50	18.62	22.09	22.67	< 30.00
		1	105	19.35	18.71	22.05	22.63	< 30.00
50	3720.00	64	32	22.75	22.02	25.41	25.99	< 30.00
		1	1	22.67	21.81	25.27	25.85	< 30.00
		1	131	22.66	22.01	25.36	25.94	< 30.00
		128	0	22.16	21.39	24.80	25.38	< 30.00
		1	0	18.85	18.02	21.47	22.05	< 30.00
		1	132	18.80	18.11	21.48	22.06	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 64QAM								
50	3840.00	64	32	22.56	22.11	25.35	25.93	< 30.00
		1	1	22.68	22.23	25.47	26.05	< 30.00
		1	131	22.43	22.02	25.24	25.82	< 30.00
		128	0	22.06	21.60	24.85	25.43	< 30.00
		1	0	19.05	18.68	21.88	22.46	< 30.00
		1	132	19.11	18.72	21.93	22.51	< 30.00
50	3954.99	64	32	22.81	22.03	25.45	26.03	< 30.00
		1	1	22.89	22.07	25.51	26.09	< 30.00
		1	131	22.91	22.28	25.62	26.20	< 30.00
		128	0	22.25	21.52	24.91	25.49	< 30.00
		1	0	19.28	18.51	21.92	22.50	< 30.00
		1	132	19.20	18.47	21.86	22.44	< 30.00
60	3730.02	81	40	22.44	21.78	25.13	25.71	< 30.00
		1	1	22.55	21.76	25.18	25.76	< 30.00
		1	160	22.64	21.91	25.30	25.88	< 30.00
		162	0	21.97	21.25	24.64	25.22	< 30.00
		1	0	18.85	18.08	21.49	22.07	< 30.00
		1	161	18.87	18.23	21.57	22.15	< 30.00
60	3840.00	81	40	22.68	22.23	25.47	26.05	< 30.00
		1	1	22.53	22.19	25.37	25.95	< 30.00
		1	160	22.65	22.19	25.44	26.02	< 30.00
		162	0	22.15	21.74	24.96	25.54	< 30.00
		1	0	19.06	18.73	21.91	22.49	< 30.00
		1	161	18.98	18.47	21.74	22.32	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 64QAM								
60	3949.98	81	40	22.60	22.06	25.35	25.93	< 30.00
		1	1	22.80	22.14	25.49	26.07	< 30.00
		1	160	22.47	22.15	25.32	25.90	< 30.00
		162	0	22.09	21.58	24.85	25.43	< 30.00
		1	0	19.17	18.51	21.86	22.44	< 30.00
		1	161	18.85	18.48	21.68	22.26	< 30.00
70	3735.00	90	45	22.60	21.86	25.26	25.84	< 30.00
		1	1	22.38	21.78	25.10	25.68	< 30.00
		1	187	22.51	21.94	25.24	25.82	< 30.00
		180	0	21.98	21.41	24.71	25.29	< 30.00
		1	0	19.01	18.15	21.61	22.19	< 30.00
		1	188	18.85	18.23	21.56	22.14	< 30.00
70	3840.00	90	45	22.52	22.13	25.34	25.92	< 30.00
		1	1	22.62	22.22	25.43	26.01	< 30.00
		1	187	22.57	22.05	25.33	25.91	< 30.00
		180	0	21.98	21.59	24.80	25.38	< 30.00
		1	0	18.86	18.63	21.76	22.34	< 30.00
		1	188	18.77	18.32	21.56	22.14	< 30.00
70	3945.00	90	45	22.64	22.11	25.39	25.97	< 30.00
		1	1	22.90	22.17	25.56	26.14	< 30.00
		1	187	22.52	22.18	25.36	25.94	< 30.00
		180	0	22.21	21.68	24.96	25.54	< 30.00
		1	0	19.65	18.90	22.30	22.88	< 30.00
		1	188	18.98	18.55	21.78	22.36	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 64QAM								
80	3740.01	108	54	22.55	21.81	25.21	25.79	< 30.00
		1	1	22.35	21.54	24.97	25.55	< 30.00
		1	215	22.55	21.95	25.27	25.85	< 30.00
		216	0	22.04	21.29	24.69	25.27	< 30.00
		1	0	18.90	18.13	21.54	22.12	< 30.00
		1	216	18.82	18.13	21.50	22.08	< 30.00
80	3840.00	108	54	22.53	22.07	25.32	25.90	< 30.00
		1	1	22.36	22.11	25.25	25.83	< 30.00
		1	215	22.40	22.03	25.23	25.81	< 30.00
		216	0	22.03	21.61	24.84	25.42	< 30.00
		1	0	18.96	18.64	21.81	22.39	< 30.00
		1	216	18.89	18.49	21.70	22.28	< 30.00
80	3939.99	108	54	22.60	22.06	25.35	25.93	< 30.00
		1	1	22.79	21.96	25.41	25.99	< 30.00
		1	215	22.51	22.12	25.33	25.91	< 30.00
		216	0	22.18	21.56	24.89	25.47	< 30.00
		1	0	19.43	18.75	22.11	22.69	< 30.00
		1	216	19.11	18.66	21.90	22.48	< 30.00
90	3745.02	120	60	22.62	21.98	25.32	25.90	< 30.00
		1	1	22.46	21.60	25.06	25.64	< 30.00
		1	243	22.73	22.06	25.42	26.00	< 30.00
		243	0	22.03	21.35	24.71	25.29	< 30.00
		1	0	18.94	18.21	21.60	22.18	< 30.00
		1	244	18.96	18.29	21.65	22.23	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 64QAM								
90	3840.00	120	60	22.59	22.14	25.38	25.96	< 30.00
		1	1	22.30	22.02	25.17	25.75	< 30.00
		1	243	22.43	22.03	25.24	25.82	< 30.00
		243	0	22.01	21.65	24.84	25.42	< 30.00
		1	0	19.21	19.04	22.14	22.72	< 30.00
		1	244	19.14	18.69	21.93	22.51	< 30.00
90	3934.98	120	60	22.63	22.09	25.38	25.96	< 30.00
		1	1	22.80	22.07	25.46	26.04	< 30.00
		1	243	22.41	22.18	25.31	25.89	< 30.00
		243	0	22.18	21.62	24.92	25.50	< 30.00
		1	0	19.49	18.74	22.14	22.72	< 30.00
		1	244	18.80	18.62	21.72	22.30	< 30.00
100	3750.00	135	67	22.54	21.91	25.25	25.83	< 30.00
		1	1	22.34	21.70	25.04	25.62	< 30.00
		1	271	22.74	22.04	25.41	25.99	< 30.00
		270	0	22.11	21.32	24.74	25.32	< 30.00
		1	0	19.17	18.42	21.82	22.40	< 30.00
		1	272	19.23	18.55	21.91	22.49	< 30.00
100	3840.00	135	67	22.61	22.12	25.38	25.96	< 30.00
		1	1	22.42	22.15	25.30	25.88	< 30.00
		1	271	22.54	22.01	25.29	25.87	< 30.00
		270	0	22.04	21.63	24.85	25.43	< 30.00
		1	0	19.08	18.72	21.91	22.49	< 30.00
		1	272	19.02	18.49	21.77	22.35	< 30.00
100	3930.00	135	67	22.65	22.21	25.45	26.03	< 30.00
		1	1	22.74	22.07	25.43	26.01	< 30.00
		1	271	22.65	22.41	25.54	26.12	< 30.00
		270	0	22.05	21.58	24.83	25.41	< 30.00
		1	0	19.24	18.59	21.94	22.52	< 30.00
		1	272	18.86	18.57	21.73	22.31	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{\text{Port 0 Output Power} / 10} + 10^{\text{Port 1 Output Power} / 10}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 256QAM								
10	3705.00	12	6	20.24	19.52	22.91	23.49	< 30.00
		1	1	20.15	19.43	22.82	23.40	< 30.00
		1	22	20.13	19.51	22.84	23.42	< 30.00
		24	0	20.19	19.49	22.86	23.44	< 30.00
		1	0	19.26	18.57	21.94	22.52	< 30.00
		1	23	19.29	18.60	21.97	22.55	< 30.00
10	3840.00	12	6	20.01	19.56	22.80	23.38	< 30.00
		1	1	19.98	19.47	22.74	23.32	< 30.00
		1	22	19.94	19.45	22.71	23.29	< 30.00
		24	0	19.95	19.45	22.72	23.30	< 30.00
		1	0	19.02	18.55	21.80	22.38	< 30.00
		1	23	18.90	18.45	21.69	22.27	< 30.00
10	3975.00	12	6	20.24	19.46	22.88	23.46	< 30.00
		1	1	20.03	19.23	22.66	23.24	< 30.00
		1	22	20.19	19.46	22.85	23.43	< 30.00
		24	0	20.18	19.47	22.85	23.43	< 30.00
		1	0	19.02	18.41	21.74	22.32	< 30.00
		1	23	19.09	18.49	21.81	22.39	< 30.00
15	3707.52	18	9	20.12	19.28	22.73	23.31	< 30.00
		1	1	20.01	19.05	22.57	23.15	< 30.00
		1	36	20.09	19.40	22.77	23.35	< 30.00
		36	0	20.03	19.21	22.65	23.23	< 30.00
		1	0	19.02	18.13	21.61	22.19	< 30.00
		1	37	19.02	18.34	21.70	22.28	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 256QAM								
15	3840.00	18	9	20.24	19.76	23.02	23.60	< 30.00
		1	1	20.14	19.77	22.97	23.55	< 30.00
		1	36	20.24	19.71	22.99	23.57	< 30.00
		36	0	20.18	19.68	22.95	23.53	< 30.00
		1	0	19.17	18.74	21.97	22.55	< 30.00
		1	37	19.15	18.59	21.89	22.47	< 30.00
15	3972.48	18	9	20.42	19.60	23.04	23.62	< 30.00
		1	1	20.45	19.53	23.02	23.60	< 30.00
		1	36	20.36	19.47	22.95	23.53	< 30.00
		36	0	20.39	19.54	23.00	23.58	< 30.00
		1	0	19.30	18.54	21.95	22.53	< 30.00
		1	37	19.33	18.61	22.00	22.58	< 30.00
20	3710.01	25	12	20.19	19.31	22.78	23.36	< 30.00
		1	1	20.11	19.26	22.72	23.30	< 30.00
		1	49	20.17	19.48	22.85	23.43	< 30.00
		50	0	20.21	19.32	22.80	23.38	< 30.00
		1	0	18.98	18.21	21.62	22.20	< 30.00
		1	50	19.11	18.46	21.81	22.39	< 30.00
20	3840.00	25	12	20.29	19.84	23.08	23.66	< 30.00
		1	1	20.07	19.63	22.87	23.45	< 30.00
		1	49	20.18	19.69	22.95	23.53	< 30.00
		50	0	20.25	19.78	23.03	23.61	< 30.00
		1	0	19.28	18.83	22.07	22.65	< 30.00
		1	50	19.17	18.77	21.98	22.56	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 256QAM								
20	3969.99	25	12	20.52	19.65	23.12	23.70	< 30.00
		1	1	20.43	19.72	23.10	23.68	< 30.00
		1	49	20.45	19.74	23.12	23.70	< 30.00
		50	0	20.50	19.69	23.12	23.70	< 30.00
		1	0	19.49	18.63	22.09	22.67	< 30.00
		1	50	19.56	18.80	22.21	22.79	< 30.00
30	3715.02	36	18	20.19	19.39	22.82	23.40	< 30.00
		1	1	20.15	19.42	22.81	23.39	< 30.00
		1	76	20.39	19.70	23.07	23.65	< 30.00
		75	0	20.28	19.45	22.90	23.48	< 30.00
		1	0	19.16	18.33	21.78	22.36	< 30.00
		1	77	19.23	18.54	21.91	22.49	< 30.00
30	3840.00	36	18	20.22	19.81	23.03	23.61	< 30.00
		1	1	20.29	19.88	23.10	23.68	< 30.00
		1	76	20.13	19.65	22.91	23.49	< 30.00
		75	0	20.31	19.84	23.09	23.67	< 30.00
		1	0	19.34	18.88	22.13	22.71	< 30.00
		1	77	19.27	18.72	22.01	22.59	< 30.00
30	3964.98	36	18	20.46	19.65	23.08	23.66	< 30.00
		1	1	20.52	19.64	23.11	23.69	< 30.00
		1	76	20.36	19.64	23.03	23.61	< 30.00
		75	0	20.52	19.69	23.14	23.72	< 30.00
		1	0	19.62	18.69	22.19	22.77	< 30.00
		1	77	19.55	18.77	22.19	22.77	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 256QAM								
40	3720.00	50	25	20.04	19.28	22.69	23.27	< 30.00
		1	1	20.12	19.21	22.70	23.28	< 30.00
		1	104	20.06	19.31	22.71	23.29	< 30.00
		100	0	20.03	19.34	22.71	23.29	< 30.00
		1	0	19.23	18.32	21.81	22.39	< 30.00
		1	105	19.08	18.40	21.76	22.34	< 30.00
40	3840.00	50	25	20.14	19.58	22.88	23.46	< 30.00
		1	1	20.13	19.78	22.97	23.55	< 30.00
		1	104	20.02	19.58	22.82	23.40	< 30.00
		100	0	20.10	19.64	22.89	23.47	< 30.00
		1	0	19.28	18.85	22.08	22.66	< 30.00
		1	105	19.13	18.72	21.94	22.52	< 30.00
40	3960.00	50	25	20.34	19.64	23.01	23.59	< 30.00
		1	1	20.31	19.47	22.92	23.50	< 30.00
		1	104	20.40	19.68	23.07	23.65	< 30.00
		100	0	20.50	19.68	23.12	23.70	< 30.00
		1	0	19.51	18.70	22.13	22.71	< 30.00
		1	105	19.46	18.81	22.16	22.74	< 30.00
50	3720.00	64	32	19.94	19.15	22.57	23.15	< 30.00
		1	1	19.67	19.06	22.39	22.97	< 30.00
		1	131	19.74	19.11	22.45	23.03	< 30.00
		128	0	19.95	19.20	22.60	23.18	< 30.00
		1	0	18.83	18.05	21.47	22.05	< 30.00
		1	132	18.89	18.30	21.62	22.20	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 256QAM								
50	3840.00	64	32	20.11	19.69	22.92	23.50	< 30.00
		1	1	20.19	19.84	23.03	23.61	< 30.00
		1	131	19.97	19.59	22.79	23.37	< 30.00
		128	0	20.14	19.72	22.95	23.53	< 30.00
		1	0	19.01	18.78	21.91	22.49	< 30.00
		1	132	18.94	18.63	21.80	22.38	< 30.00
50	3954.99	64	32	20.30	19.51	22.93	23.51	< 30.00
		1	1	20.49	19.62	23.09	23.67	< 30.00
		1	131	20.20	19.62	22.93	23.51	< 30.00
		128	0	20.36	19.52	22.97	23.55	< 30.00
		1	0	19.32	18.44	21.91	22.49	< 30.00
		1	132	19.12	18.55	21.85	22.43	< 30.00
60	3730.02	81	40	19.94	19.25	22.62	23.20	< 30.00
		1	1	19.69	19.00	22.37	22.95	< 30.00
		1	160	19.90	19.25	22.60	23.18	< 30.00
		162	0	19.96	19.27	22.64	23.22	< 30.00
		1	0	19.98	18.21	22.19	22.77	< 30.00
		1	161	18.92	18.11	21.54	22.12	< 30.00
60	3840.00	81	40	20.16	19.70	22.95	23.53	< 30.00
		1	1	19.97	19.73	22.86	23.44	< 30.00
		1	160	19.98	19.55	22.78	23.36	< 30.00
		162	0	20.13	19.62	22.89	23.47	< 30.00
		1	0	18.94	18.64	21.80	22.38	< 30.00
		1	161	18.73	18.35	21.55	22.13	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 256QAM								
60	3949.98	81	40	20.11	19.56	22.85	23.43	< 30.00
		1	1	20.16	19.62	22.91	23.49	< 30.00
		1	160	20.17	19.55	22.88	23.46	< 30.00
		162	0	20.12	19.56	22.86	23.44	< 30.00
		1	0	19.09	18.41	21.77	22.35	< 30.00
		1	161	18.89	18.48	21.70	22.28	< 30.00
70	3735.00	90	45	20.03	19.32	22.70	23.28	< 30.00
		1	1	19.92	19.17	22.57	23.15	< 30.00
		1	187	20.00	19.31	22.68	23.26	< 30.00
		180	0	20.04	19.27	22.68	23.26	< 30.00
		1	0	19.05	18.17	21.64	22.22	< 30.00
		1	188	19.02	18.32	21.69	22.27	< 30.00
70	3840.00	90	45	20.07	19.64	22.87	23.45	< 30.00
		1	1	20.01	19.71	22.87	23.45	< 30.00
		1	187	19.87	19.44	22.67	23.25	< 30.00
		180	0	20.03	19.62	22.84	23.42	< 30.00
		1	0	19.10	18.69	21.91	22.49	< 30.00
		1	188	19.05	18.53	21.81	22.39	< 30.00
70	3945.00	90	45	20.17	19.61	22.91	23.49	< 30.00
		1	1	20.27	19.65	22.98	23.56	< 30.00
		1	187	19.89	19.52	22.72	23.30	< 30.00
		180	0	20.13	19.61	22.89	23.47	< 30.00
		1	0	19.38	18.58	22.01	22.59	< 30.00
		1	188	18.79	18.38	21.60	22.18	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 256QAM								
80	3740.01	108	54	20.02	19.27	22.67	23.25	< 30.00
		1	1	19.85	19.06	22.48	23.06	< 30.00
		1	215	20.07	19.27	22.70	23.28	< 30.00
		216	0	20.01	19.25	22.66	23.24	< 30.00
		1	0	18.94	18.32	21.65	22.23	< 30.00
		1	216	18.96	18.18	21.60	22.18	< 30.00
80	3840.00	108	54	20.01	19.60	22.82	23.40	< 30.00
		1	1	19.89	19.59	22.75	23.33	< 30.00
		1	215	19.94	19.50	22.74	23.32	< 30.00
		216	0	20.03	19.62	22.84	23.42	< 30.00
		1	0	18.93	18.60	21.78	22.36	< 30.00
		1	216	18.92	18.52	21.73	22.31	< 30.00
80	3939.99	108	54	20.15	19.59	22.89	23.47	< 30.00
		1	1	20.37	19.58	23.00	23.58	< 30.00
		1	215	19.83	19.57	22.71	23.29	< 30.00
		216	0	20.17	19.63	22.92	23.50	< 30.00
		1	0	19.30	18.58	21.97	22.55	< 30.00
		1	216	18.80	18.54	21.68	22.26	< 30.00
90	3745.02	120	60	20.05	19.44	22.77	23.35	< 30.00
		1	1	19.93	19.08	22.54	23.12	< 30.00
		1	243	20.20	19.43	22.84	23.42	< 30.00
		243	0	20.05	19.29	22.70	23.28	< 30.00
		1	0	19.07	18.32	21.72	22.30	< 30.00
		1	244	19.01	18.35	21.70	22.28	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 256QAM								
90	3840.00	120	60	20.06	19.64	22.87	23.45	< 30.00
		1	1	19.84	19.55	22.71	23.29	< 30.00
		1	243	19.96	19.36	22.68	23.26	< 30.00
		243	0	20.02	19.62	22.83	23.41	< 30.00
		1	0	18.93	18.70	21.83	22.41	< 30.00
		1	244	18.98	18.55	21.78	22.36	< 30.00
90	3934.98	120	60	20.10	19.55	22.84	23.42	< 30.00
		1	1	20.24	19.49	22.89	23.47	< 30.00
		1	243	19.83	19.49	22.67	23.25	< 30.00
		243	0	20.12	19.57	22.86	23.44	< 30.00
		1	0	19.25	18.60	21.95	22.53	< 30.00
		1	244	18.89	18.61	21.76	22.34	< 30.00
100	3750.00	135	67	20.09	19.48	22.81	23.39	< 30.00
		1	1	19.88	19.10	22.52	23.10	< 30.00
		1	271	20.15	19.39	22.80	23.38	< 30.00
		270	0	20.06	19.30	22.71	23.29	< 30.00
		1	0	19.10	18.26	21.71	22.29	< 30.00
		1	272	19.12	18.35	21.76	22.34	< 30.00
100	3840.00	135	67	20.09	19.67	22.90	23.48	< 30.00
		1	1	19.77	19.54	22.67	23.25	< 30.00
		1	271	19.93	19.45	22.71	23.29	< 30.00
		270	0	20.04	19.59	22.83	23.41	< 30.00
		1	0	18.91	18.60	21.77	22.35	< 30.00
		1	272	19.01	18.46	21.75	22.33	< 30.00
100	3930.00	135	67	20.19	19.67	22.95	23.53	< 30.00
		1	1	20.21	19.49	22.88	23.46	< 30.00
		1	271	19.82	19.62	22.73	23.31	< 30.00
		270	0	20.14	19.62	22.90	23.48	< 30.00
		1	0	19.20	18.56	21.90	22.48	< 30.00
		1	272	18.79	18.53	21.67	22.25	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{\text{Port 0 Output Power} / 10} + 10^{\text{Port 1 Output Power} / 10}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM QPSK								
10	3705.00	12	6	24.21	23.43	26.85	27.43	< 30.00
		1	1	24.15	23.30	26.76	27.34	< 30.00
		1	22	24.23	23.49	26.89	27.47	< 30.00
		24	0	21.73	20.90	24.35	24.93	< 30.00
		1	0	19.22	18.46	21.87	22.45	< 30.00
		1	23	19.21	18.57	21.91	22.49	< 30.00
10	3840.00	12	6	24.23	23.76	27.01	27.59	< 30.00
		1	1	24.05	23.70	26.89	27.47	< 30.00
		1	22	24.14	23.73	26.95	27.53	< 30.00
		24	0	21.64	21.19	24.43	25.01	< 30.00
		1	0	19.19	18.78	22.00	22.58	< 30.00
		1	23	19.21	18.84	22.04	22.62	< 30.00
10	3975.00	12	6	24.55	23.83	27.22	27.80	< 30.00
		1	1	24.46	23.77	27.14	27.72	< 30.00
		1	22	24.49	23.85	27.19	27.77	< 30.00
		24	0	21.93	21.23	24.60	25.18	< 30.00
		1	0	19.51	18.90	22.23	22.81	< 30.00
		1	23	19.52	18.76	22.17	22.75	< 30.00
15	3707.52	19	9	24.27	23.42	26.88	27.46	< 30.00
		1	1	24.39	23.55	27.00	27.58	< 30.00
		1	36	24.41	23.70	27.08	27.66	< 30.00
		38	0	21.79	20.94	24.40	24.98	< 30.00
		1	0	19.34	18.61	22.00	22.58	< 30.00
		1	37	19.37	18.68	22.05	22.63	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM QPSK								
15	3840.00	19	9	24.39	23.95	27.19	27.77	< 30.00
		1	1	24.42	24.08	27.26	27.84	< 30.00
		1	36	24.44	23.94	27.21	27.79	< 30.00
		38	0	21.89	21.42	24.67	25.25	< 30.00
		1	0	19.47	19.09	22.29	22.87	< 30.00
		1	37	19.40	19.02	22.22	22.80	< 30.00
15	3972.48	19	9	24.60	23.81	27.23	27.81	< 30.00
		1	1	24.72	24.02	27.39	27.97	< 30.00
		1	36	24.71	24.14	27.44	28.02	< 30.00
		38	0	22.12	21.26	24.72	25.30	< 30.00
		1	0	19.76	18.87	22.35	22.93	< 30.00
		1	37	19.77	18.95	22.39	22.97	< 30.00
20	3710.01	25	12	24.35	23.51	26.96	27.54	< 30.00
		1	1	24.28	23.51	26.92	27.50	< 30.00
		1	49	24.29	23.69	27.01	27.59	< 30.00
		51	0	21.80	21.06	24.46	25.04	< 30.00
		1	0	19.40	18.56	22.01	22.59	< 30.00
		1	50	19.43	18.75	22.11	22.69	< 30.00
20	3840.00	25	12	24.43	24.01	27.24	27.82	< 30.00
		1	1	24.41	24.11	27.28	27.86	< 30.00
		1	49	24.48	23.99	27.25	27.83	< 30.00
		51	0	21.91	21.49	24.72	25.30	< 30.00
		1	0	19.45	19.09	22.28	22.86	< 30.00
		1	50	19.48	19.01	22.26	22.84	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM QPSK								
20	3969.99	25	12	24.54	23.93	27.26	27.84	< 30.00
		1	1	24.64	23.89	27.29	27.87	< 30.00
		1	49	24.67	23.95	27.34	27.92	< 30.00
		51	0	22.16	21.38	24.80	25.38	< 30.00
		1	0	19.70	18.91	22.33	22.91	< 30.00
		1	50	19.88	19.10	22.52	23.10	< 30.00
30	3715.02	39	19	24.35	23.53	26.97	27.55	< 30.00
		1	1	24.34	23.58	26.99	27.57	< 30.00
		1	76	24.34	23.65	27.02	27.60	< 30.00
		78	0	21.96	21.11	24.57	25.15	< 30.00
		1	0	19.52	18.70	22.14	22.72	< 30.00
		1	77	19.54	18.77	22.18	22.76	< 30.00
30	3840.00	39	19	24.38	23.94	27.18	27.76	< 30.00
		1	1	24.61	24.15	27.40	27.98	< 30.00
		1	76	24.73	24.92	27.84	28.42	< 30.00
		78	0	21.97	21.50	24.75	25.33	< 30.00
		1	0	19.69	19.20	22.46	23.04	< 30.00
		1	77	19.58	19.05	22.33	22.91	< 30.00
30	3964.98	39	19	24.59	23.87	27.26	27.84	< 30.00
		1	1	24.79	23.94	27.40	27.98	< 30.00
		1	76	24.66	23.97	27.34	27.92	< 30.00
		78	0	22.08	21.39	24.76	25.34	< 30.00
		1	0	19.77	18.95	22.39	22.97	< 30.00
		1	77	19.67	18.94	22.33	22.91	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM QPSK								
40	3720.00	53	26	24.39	23.62	27.03	27.61	< 30.00
		1	1	24.50	23.73	27.14	27.72	< 30.00
		1	104	24.63	23.86	27.27	27.85	< 30.00
		106	0	21.93	21.21	24.60	25.18	< 30.00
		1	0	19.70	18.96	22.36	22.94	< 30.00
		1	105	19.62	18.91	22.29	22.87	< 30.00
40	3840.00	53	26	24.42	23.98	27.22	27.80	< 30.00
		1	1	24.50	24.13	27.33	27.91	< 30.00
		1	104	24.45	24.11	27.29	27.87	< 30.00
		106	0	21.94	21.49	24.73	25.31	< 30.00
		1	0	19.72	19.33	22.54	23.12	< 30.00
		1	105	19.55	19.05	22.32	22.90	< 30.00
40	3960.00	53	26	24.62	23.87	27.27	27.85	< 30.00
		1	1	24.97	24.11	27.57	28.15	< 30.00
		1	104	24.77	24.21	27.51	28.09	< 30.00
		106	0	22.17	21.37	24.80	25.38	< 30.00
		1	0	19.99	19.08	22.57	23.15	< 30.00
		1	105	19.88	19.14	22.54	23.12	< 30.00
50	3720.00	67	33	24.21	23.45	26.86	27.44	< 30.00
		1	1	24.12	23.24	26.71	27.29	< 30.00
		1	131	24.10	23.45	26.80	27.38	< 30.00
		133	0	21.67	20.99	24.35	24.93	< 30.00
		1	0	19.45	18.49	22.01	22.59	< 30.00
		1	132	19.33	18.59	21.99	22.57	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM QPSK								
50	3840.00	67	33	24.25	23.80	27.04	27.62	< 30.00
		1	1	24.31	23.92	27.13	27.71	< 30.00
		1	131	24.28	23.76	27.04	27.62	< 30.00
		133	0	21.74	21.32	24.55	25.13	< 30.00
		1	0	19.36	19.06	22.22	22.80	< 30.00
		1	132	19.29	18.95	22.13	22.71	< 30.00
50	3954.99	67	33	24.42	23.74	27.10	27.68	< 30.00
		1	1	24.61	23.81	27.24	27.82	< 30.00
		1	131	24.35	23.68	27.04	27.62	< 30.00
		133	0	21.98	21.23	24.63	25.21	< 30.00
		1	0	19.72	18.87	22.33	22.91	< 30.00
		1	132	19.54	18.83	22.21	22.79	< 30.00
60	3730.02	81	40	24.09	23.40	26.77	27.35	< 30.00
		1	1	24.04	23.27	26.68	27.26	< 30.00
		1	160	24.10	23.42	26.78	27.36	< 30.00
		162	0	21.61	20.91	24.28	24.86	< 30.00
		1	0	19.25	18.45	21.88	22.46	< 30.00
		1	161	19.20	18.48	21.87	22.45	< 30.00
60	3840.00	81	40	24.26	23.80	27.05	27.63	< 30.00
		1	1	24.38	23.92	27.17	27.75	< 30.00
		1	160	24.19	23.76	26.99	27.57	< 30.00
		162	0	21.74	21.28	24.53	25.11	< 30.00
		1	0	19.33	18.99	22.17	22.75	< 30.00
		1	161	19.42	18.80	22.13	22.71	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM QPSK								
60	3949.98	81	40	24.14	23.71	26.94	27.52	< 30.00
		1	1	24.35	23.73	27.06	27.64	< 30.00
		1	160	24.08	23.64	26.88	27.46	< 30.00
		162	0	21.73	21.15	24.46	25.04	< 30.00
		1	0	19.42	18.79	22.13	22.71	< 30.00
		1	161	19.29	18.77	22.05	22.63	< 30.00
70	3735.00	95	47	23.65	22.95	26.32	26.90	< 30.00
		1	1	23.50	22.84	26.19	26.77	< 30.00
		1	187	23.76	23.08	26.44	27.02	< 30.00
		189	0	21.14	20.44	23.81	24.39	< 30.00
		1	0	18.90	18.12	21.54	22.12	< 30.00
		1	188	18.70	18.10	21.42	22.00	< 30.00
70	3840.00	95	47	23.68	23.15	26.43	27.01	< 30.00
		1	1	23.60	23.24	26.43	27.01	< 30.00
		1	187	23.55	23.41	26.49	27.07	< 30.00
		189	0	21.10	20.74	23.93	24.51	< 30.00
		1	0	18.91	18.42	21.68	22.26	< 30.00
		1	188	18.56	18.21	21.40	21.98	< 30.00
70	3945.00	95	47	23.68	23.24	26.48	27.06	< 30.00
		1	1	24.03	23.44	26.76	27.34	< 30.00
		1	187	23.83	23.40	26.63	27.21	< 30.00
		189	0	21.24	20.70	23.99	24.57	< 30.00
		1	0	19.22	18.44	21.86	22.44	< 30.00
		1	188	18.57	18.38	21.49	22.07	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								


Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM QPSK								
80	3740.01	109	54	23.58	22.84	26.24	26.82	< 30.00
		1	1	23.62	22.82	26.25	26.83	< 30.00
		1	215	23.68	23.03	26.38	26.96	< 30.00
		217	0	21.12	20.42	23.79	24.37	< 30.00
		1	0	18.78	18.10	21.46	22.04	< 30.00
		1	216	18.73	17.98	21.38	21.96	< 30.00
80	3840.00	109	54	23.64	23.25	26.46	27.04	< 30.00
		1	1	23.53	23.24	26.40	26.98	< 30.00
		1	215	23.62	23.29	26.47	27.05	< 30.00
		217	0	21.10	20.72	23.92	24.50	< 30.00
		1	0	18.70	18.43	21.58	22.16	< 30.00
		1	216	18.62	18.31	21.48	22.06	< 30.00
80	3939.99	109	54	23.72	23.22	26.49	27.07	< 30.00
		1	1	24.01	23.25	26.66	27.24	< 30.00
		1	215	23.56	23.28	26.43	27.01	< 30.00
		217	0	21.21	20.77	24.01	24.59	< 30.00
		1	0	18.94	18.34	21.66	22.24	< 30.00
		1	216	18.61	18.24	21.44	22.02	< 30.00
90	3745.02	123	61	23.65	23.13	26.41	26.99	< 30.00
		1	1	23.52	22.70	26.14	26.72	< 30.00
		1	243	23.69	23.06	26.40	26.98	< 30.00
		245	0	21.17	20.46	23.84	24.42	< 30.00
		1	0	18.65	18.06	21.38	21.96	< 30.00
		1	244	18.88	18.19	21.56	22.14	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM QPSK								
90	3840.00	123	61	23.63	23.29	26.47	27.05	< 30.00
		1	1	23.59	23.29	26.45	27.03	< 30.00
		1	243	23.77	23.32	26.56	27.14	< 30.00
		245	0	21.17	20.80	24.00	24.58	< 30.00
		1	0	18.79	18.44	21.63	22.21	< 30.00
		1	244	18.70	18.24	21.49	22.07	< 30.00
90	3934.98	123	61	23.74	23.25	26.51	27.09	< 30.00
		1	1	23.95	23.28	26.64	27.22	< 30.00
		1	243	23.45	23.27	26.37	26.95	< 30.00
		245	0	21.28	20.76	24.04	24.62	< 30.00
		1	0	19.13	18.34	21.76	22.34	< 30.00
		1	244	18.71	18.53	21.63	22.21	< 30.00
100	3750.00	137	68	23.65	23.11	26.40	26.98	< 30.00
		1	1	23.67	22.91	26.32	26.90	< 30.00
		1	271	23.88	23.23	26.58	27.16	< 30.00
		273	0	21.22	20.49	23.88	24.46	< 30.00
		1	0	18.91	18.11	21.54	22.12	< 30.00
		1	272	18.92	18.22	21.59	22.17	< 30.00
100	3840.00	137	68	23.62	23.28	26.46	27.04	< 30.00
		1	1	23.55	23.45	26.51	27.09	< 30.00
		1	271	23.69	23.22	26.47	27.05	< 30.00
		273	0	21.16	20.80	23.99	24.57	< 30.00
		1	0	18.70	18.48	21.60	22.18	< 30.00
		1	272	18.78	18.28	21.55	22.13	< 30.00
100	3930.00	137	68	23.75	23.31	26.55	27.13	< 30.00
		1	1	23.96	23.33	26.67	27.25	< 30.00
		1	271	23.57	23.50	26.55	27.13	< 30.00
		273	0	21.20	20.82	24.02	24.60	< 30.00
		1	0	18.94	18.39	21.68	22.26	< 30.00
		1	272	18.56	18.35	21.47	22.05	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{\text{Port 0 Output Power} / 10} + 10^{\text{Port 1 Output Power} / 10}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

A.4 Peak to Average Ratio Test Result


Test Site	WZ-SR6	Test Engineer	Cloud Guo
Test Date	2023-04-12	Test Band	n41_UL MIMO_Port 3

Frequency (MHz)	Channel Bandwidth (MHz)	Peak to Average Ratio (dB)	Limit (dB)	Result
QPSK				
2592.99	100	7.07	≤ 13.00	Pass
16QAM				
2592.99	100	7.09	≤ 13.00	Pass
64QAM				
2592.99	100	7.71	≤ 13.00	Pass
256QAM				
2592.99	100	8.76	≤ 13.00	Pass

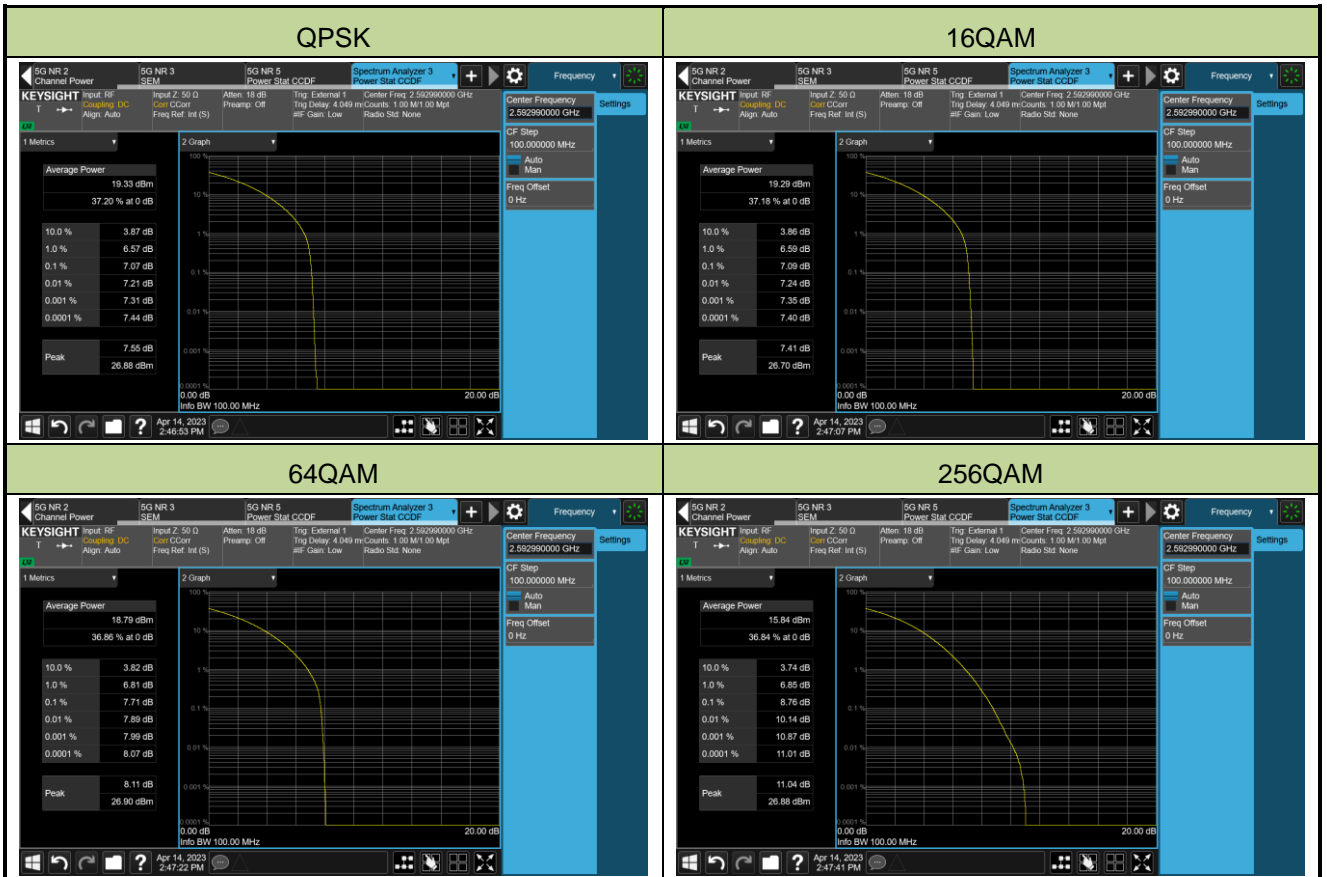

Test Site	WZ-SR6	Test Engineer	Cloud Guo
Test Date	2023-04-12	Test Band	n77/n78_UL MIMO (3450~3550MHz) Port 0

Frequency (MHz)	Channel Bandwidth (MHz)	Peak to Average Ratio (dB)	Limit (dB)	Result
QPSK				
3500.01	100	7.07	≤ 13.00	Pass
16QAM				
3500.01	100	7.07	≤ 13.00	Pass
64QAM				
3500.01	100	7.64	≤ 13.00	Pass
256QAM				
3500.01	100	8.68	≤ 13.00	Pass

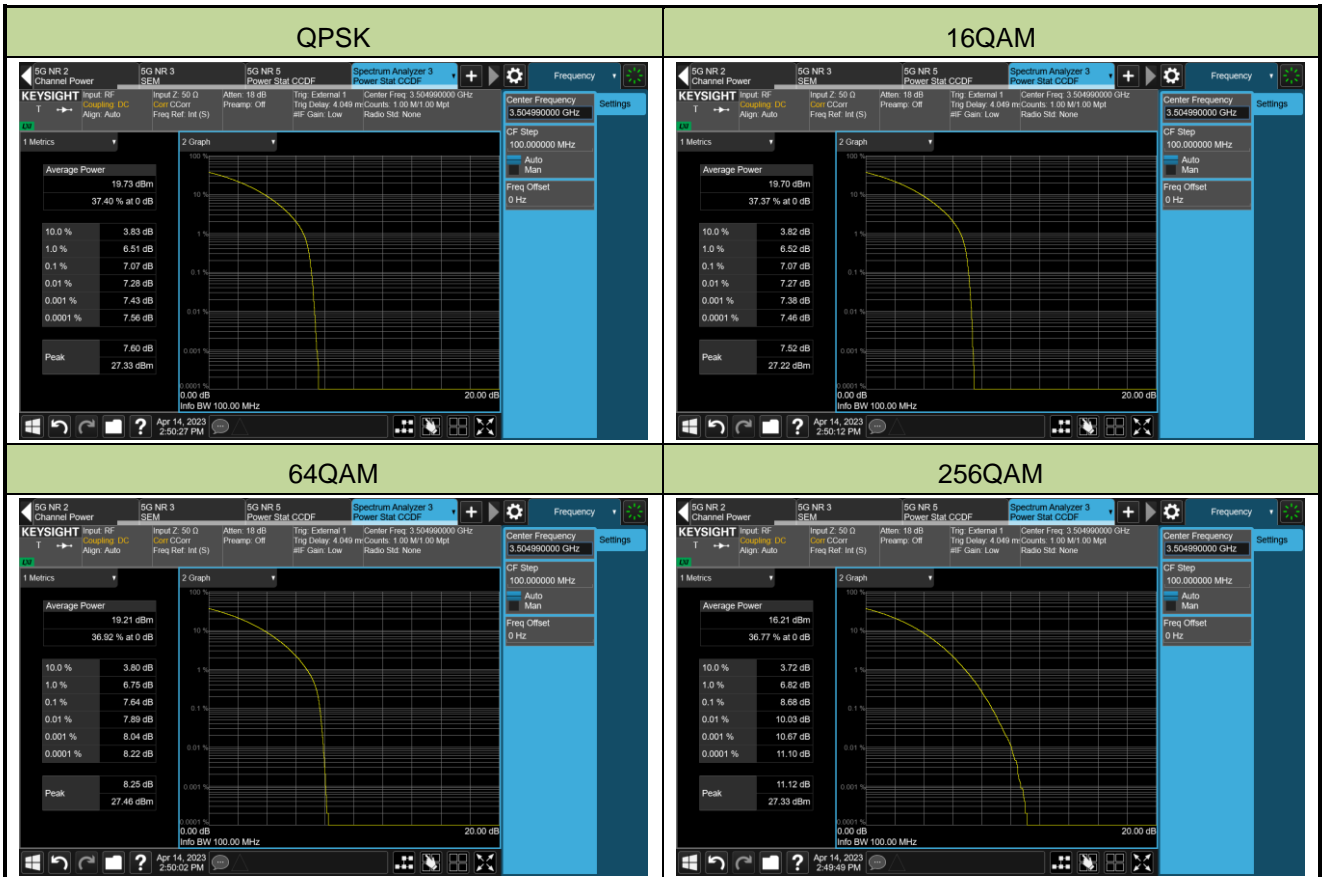

Test Site	WZ-SR6	Test Engineer	Cloud Guo
Test Date	2023-04-14	Test Band	n77/n78_UL MIMO (3700~3980MHz) Port 0

Frequency (MHz)	Channel Bandwidth (MHz)	Peak to Average Ratio (dB)	Limit (dB)	Result
QPSK				
3840.00	100	6.71	≤ 13.00	Pass
16QAM				
3840.00	100	6.64	≤ 13.00	Pass
64QAM				
3840.00	100	7.27	≤ 13.00	Pass
256QAM				
3840.00	100	8.57	≤ 13.00	Pass

