



99% Bandwidth - 256QAM


10MHz Channel Bandwidth

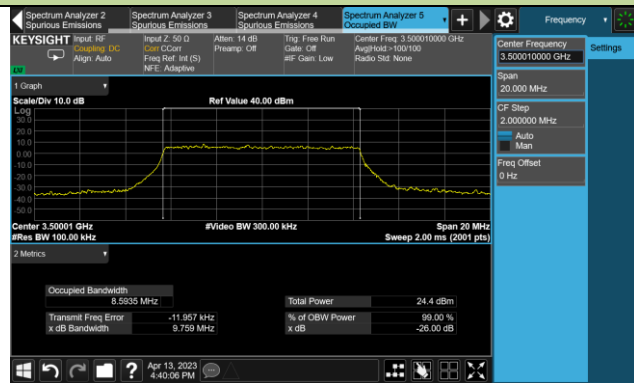


15MHz Channel Bandwidth

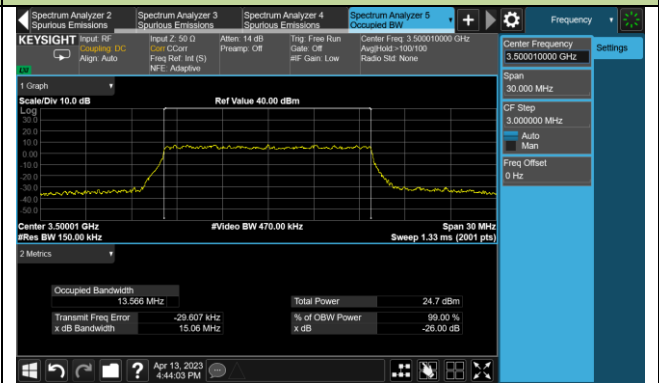


20MHz Channel Bandwidth

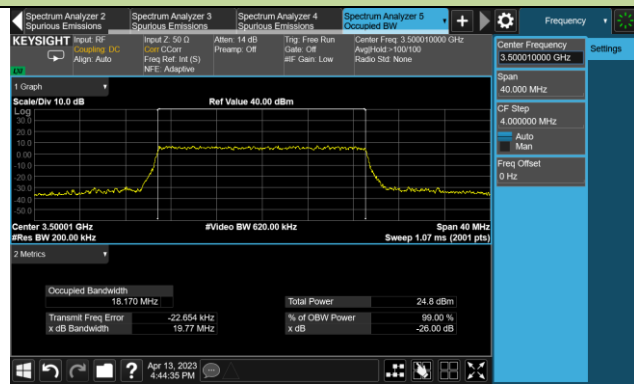


30MHz Channel Bandwidth

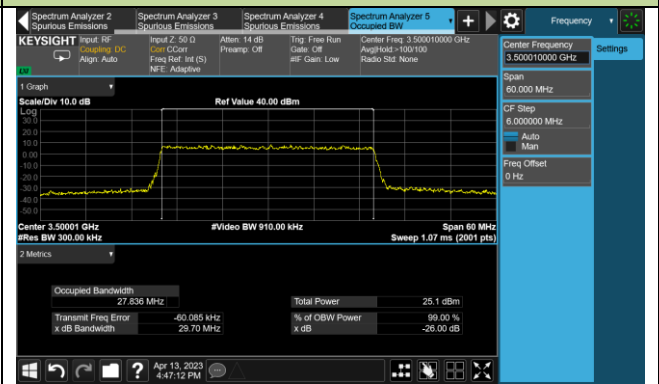


40MHz Channel Bandwidth

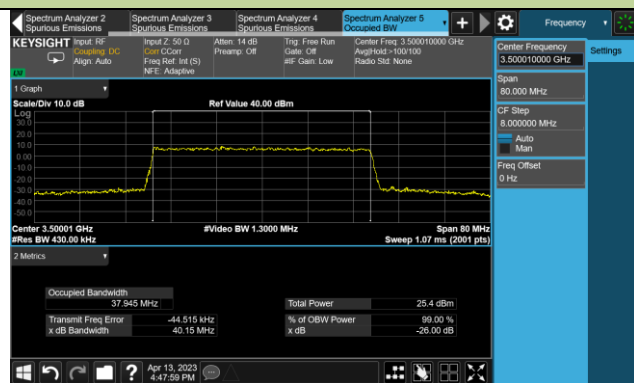


50MHz Channel Bandwidth

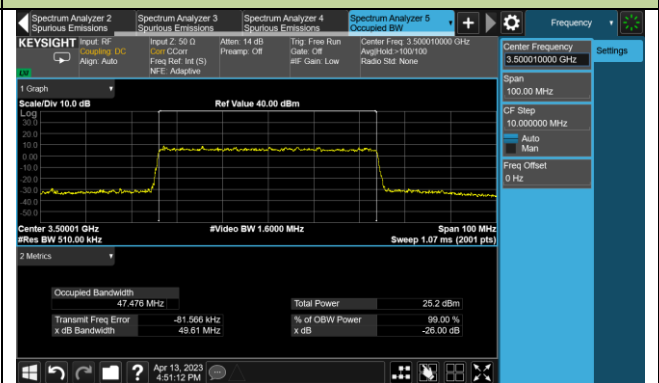

60MHz Channel Bandwidth

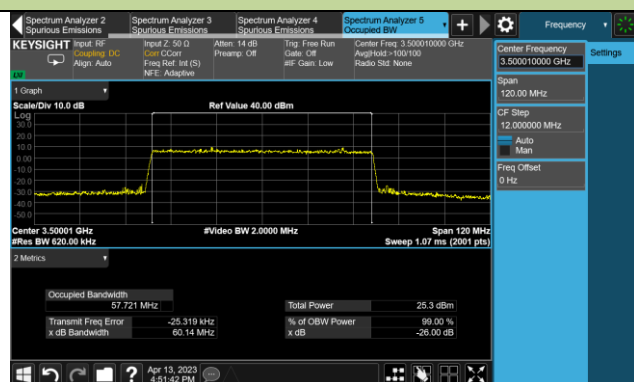

70MHz Channel Bandwidth

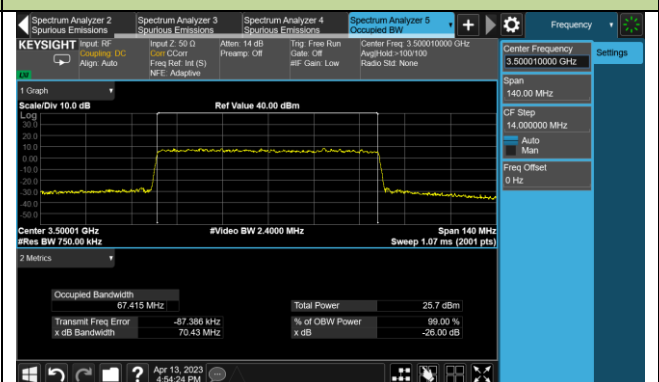




Test Site	WZ-SR6	Test Engineer	Cloud Guo
Test Date	2023-04-13 2023-05-11	Test Band	n77/n78_UL MIMO (3700 ~ 3980MHz)

Frequency (MHz)	Bandwidth (MHz)	99% Bandwidth (MHz)
QPSK		
3840.00	10	8.60
3840.00	15	13.58
3840.00	20	18.21
3840.00	25	23.20
3840.00	30	27.85
3840.00	40	37.73
3840.00	50	47.40
3840.00	60	57.75
3840.00	70	67.35
3840.00	80	77.40
3840.00	90	87.35
3840.00	100	97.28
16QAM		
3840.00	10	8.57
3840.00	15	13.58
3840.00	20	18.17
3840.00	25	23.15
3840.00	30	28.83
3840.00	40	37.81
3840.00	50	47.49
3840.00	60	57.61
3840.00	70	67.38
3840.00	80	77.39
3840.00	90	87.20
3840.00	100	97.36


64QAM		
3840.00	10	8.58
3840.00	15	13.55
3840.00	20	18.20
3840.00	25	23.16
3840.00	30	27.81
3840.00	40	37.77
3840.00	50	47.53
3840.00	60	57.71
3840.00	70	67.42
3840.00	80	77.35
3840.00	90	87.31
3840.00	100	97.31
256QAM		
3840.00	10	8.59
3840.00	15	13.55
3840.00	20	18.17
3840.00	25	23.22
3840.00	30	27.83
3840.00	40	37.83
3840.00	50	47.31
3840.00	60	57.69
3840.00	70	67.39
3840.00	80	77.48
3840.00	90	87.47
3840.00	100	97.34

99% Bandwidth - QPSK


10MHz Channel Bandwidth

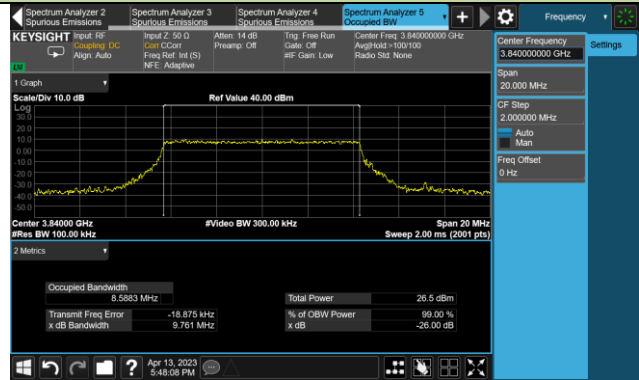


15MHz Channel Bandwidth

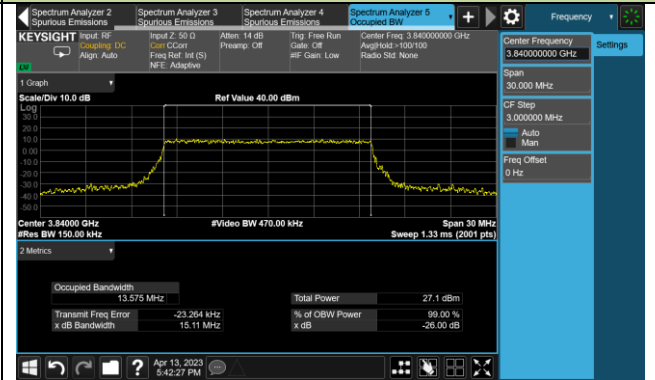


20MHz Channel Bandwidth

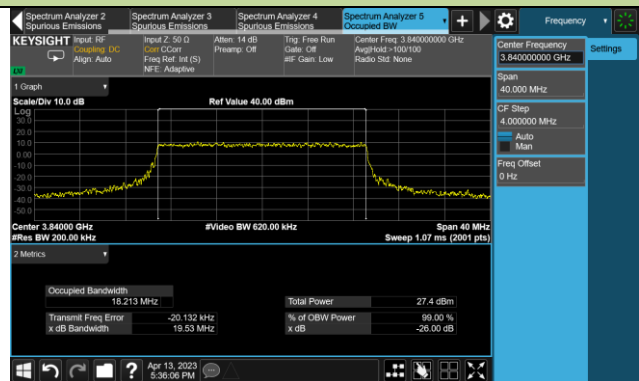


30MHz Channel Bandwidth

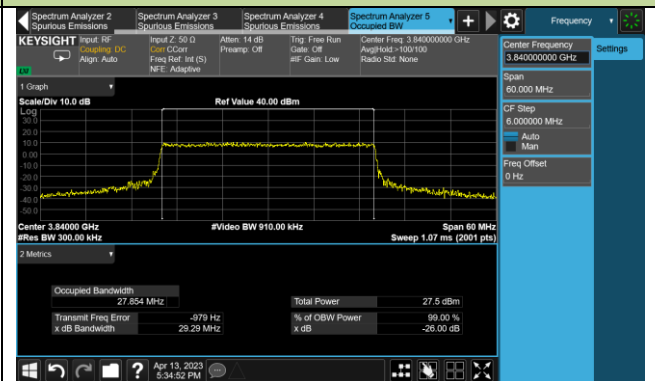



40MHz Channel Bandwidth

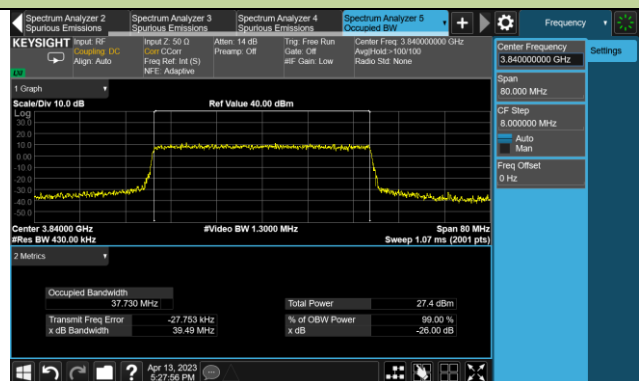



50MHz Channel Bandwidth

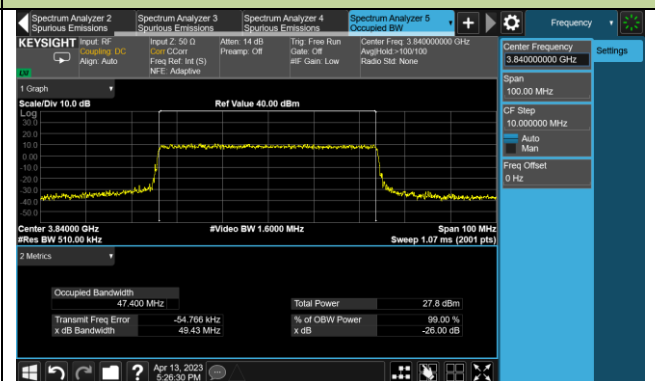


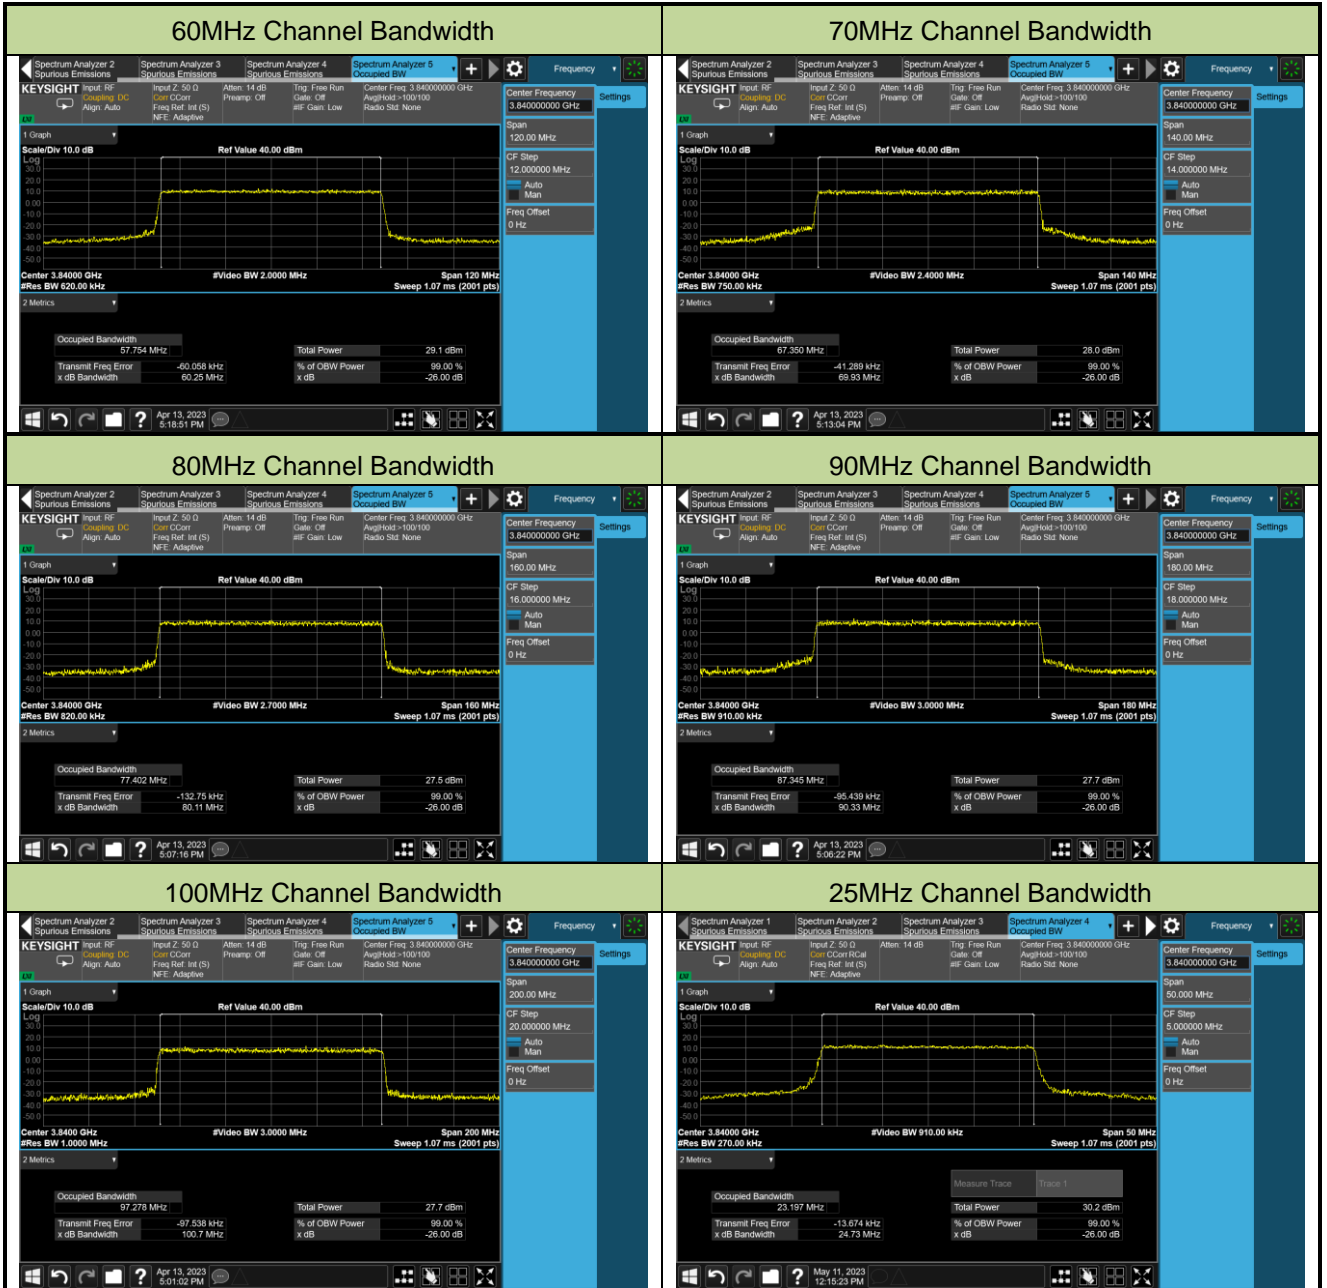

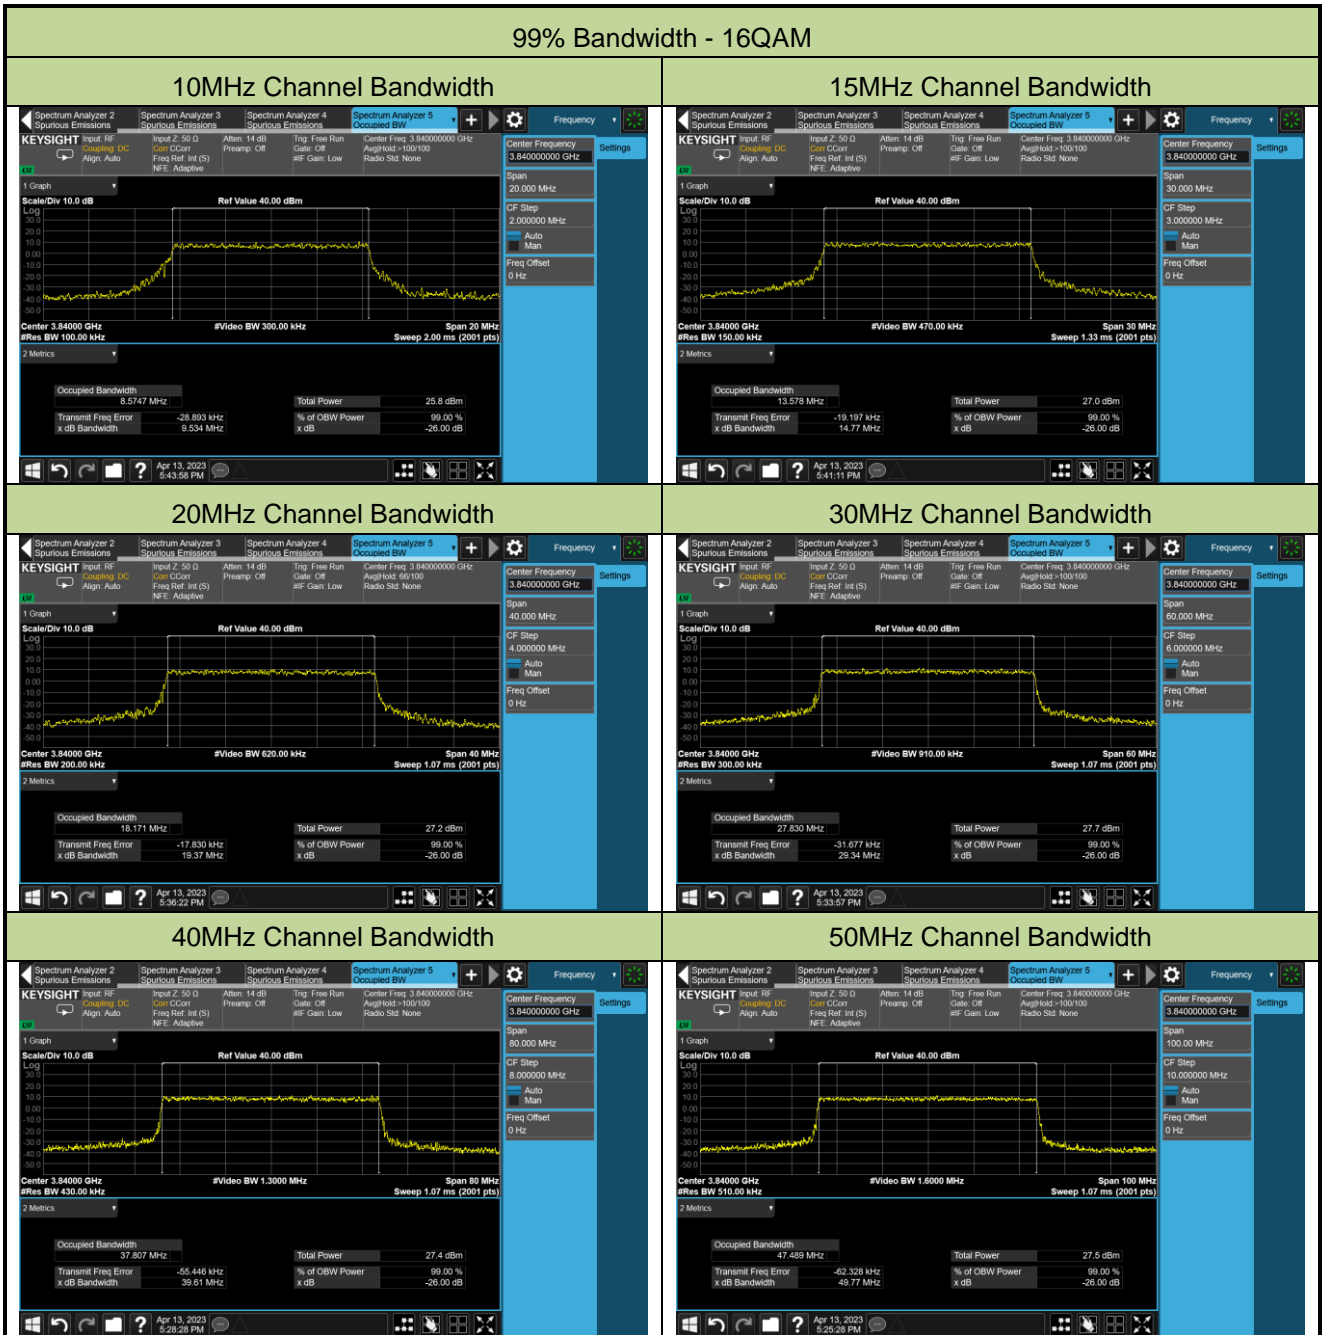

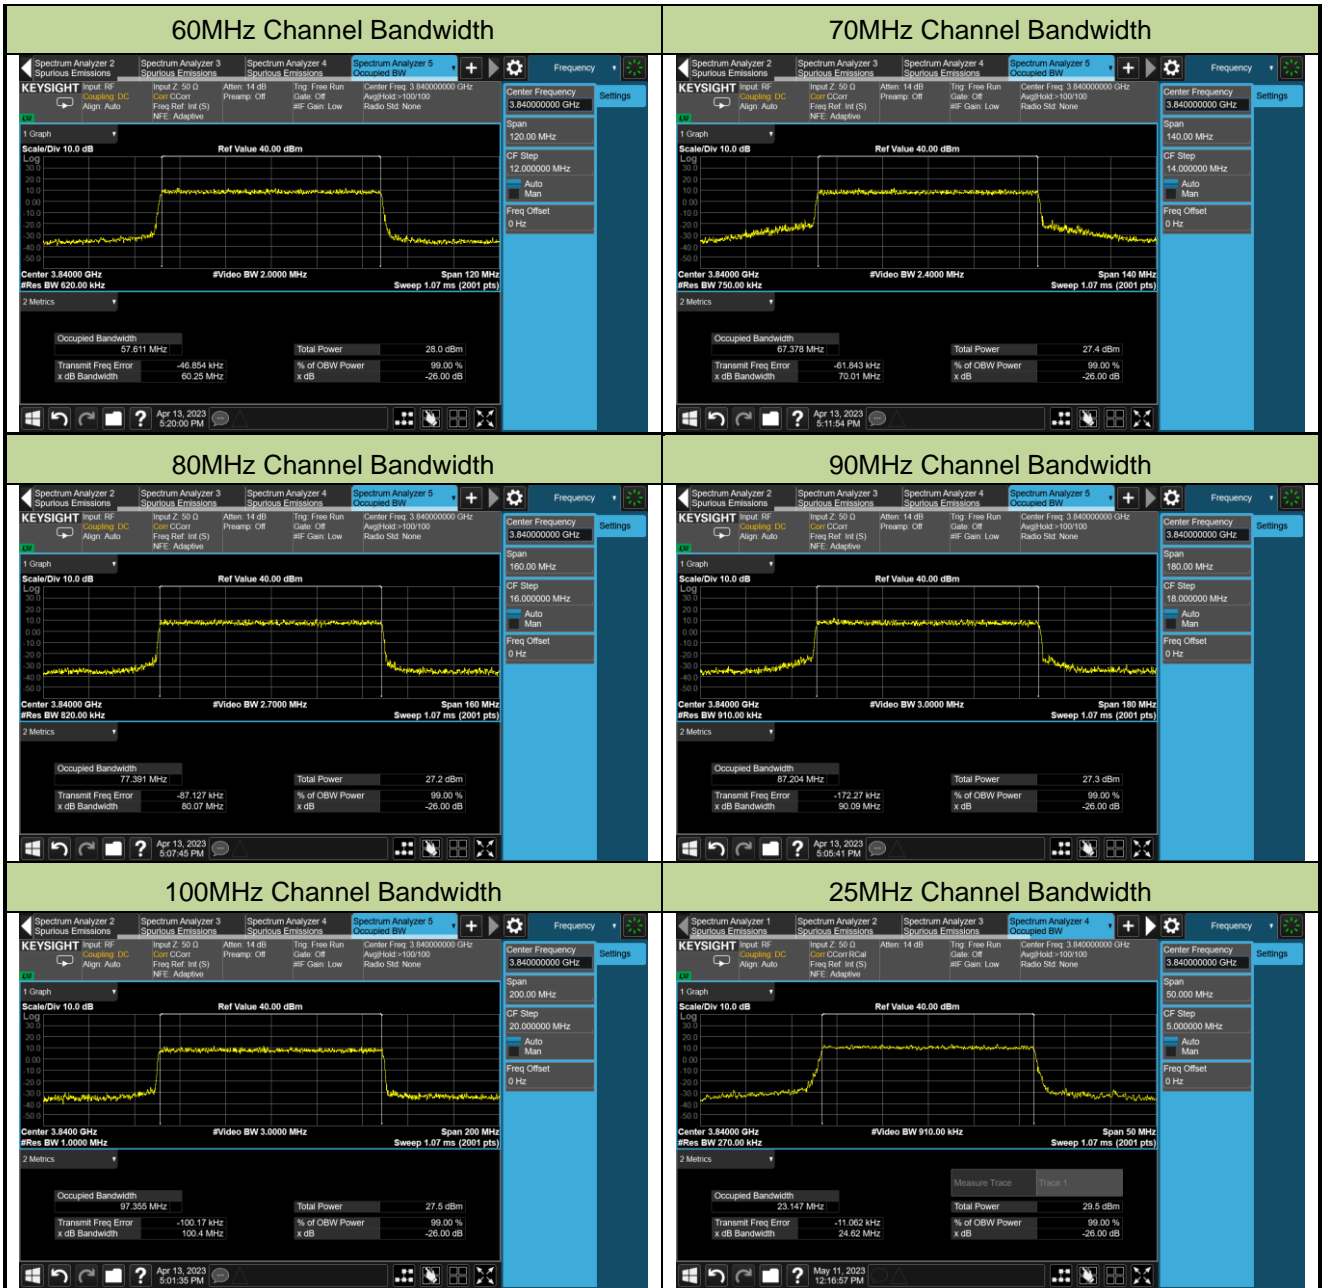


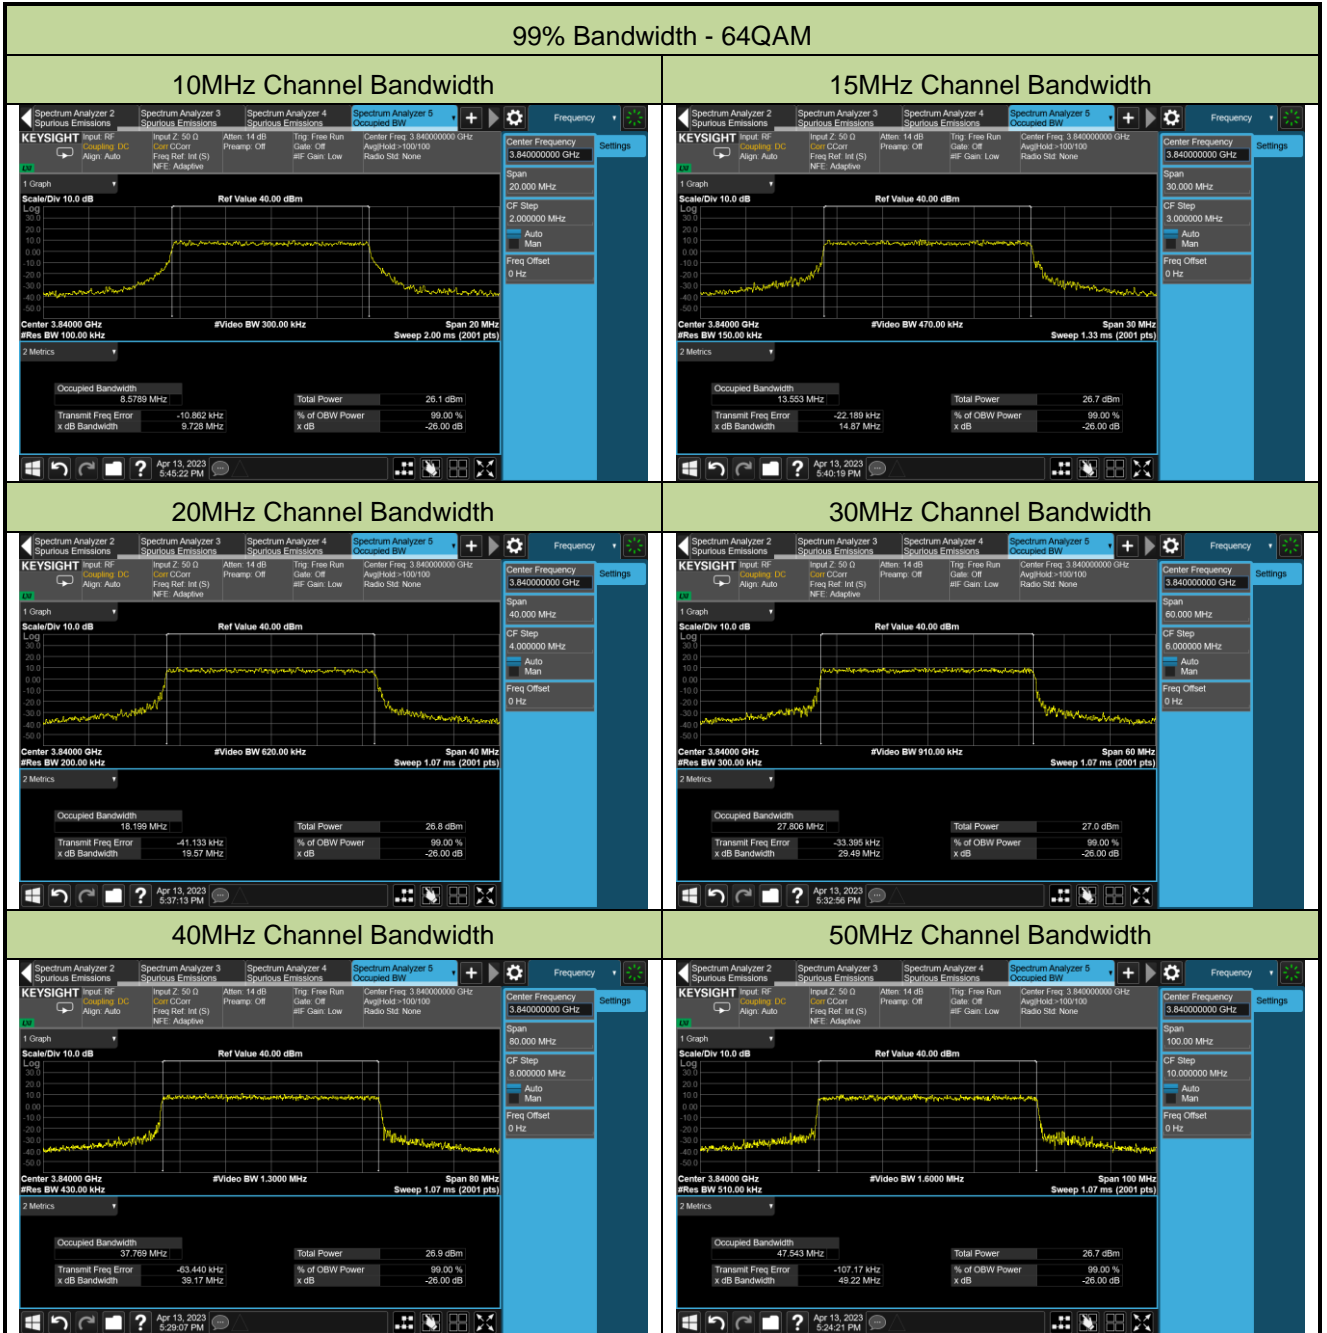

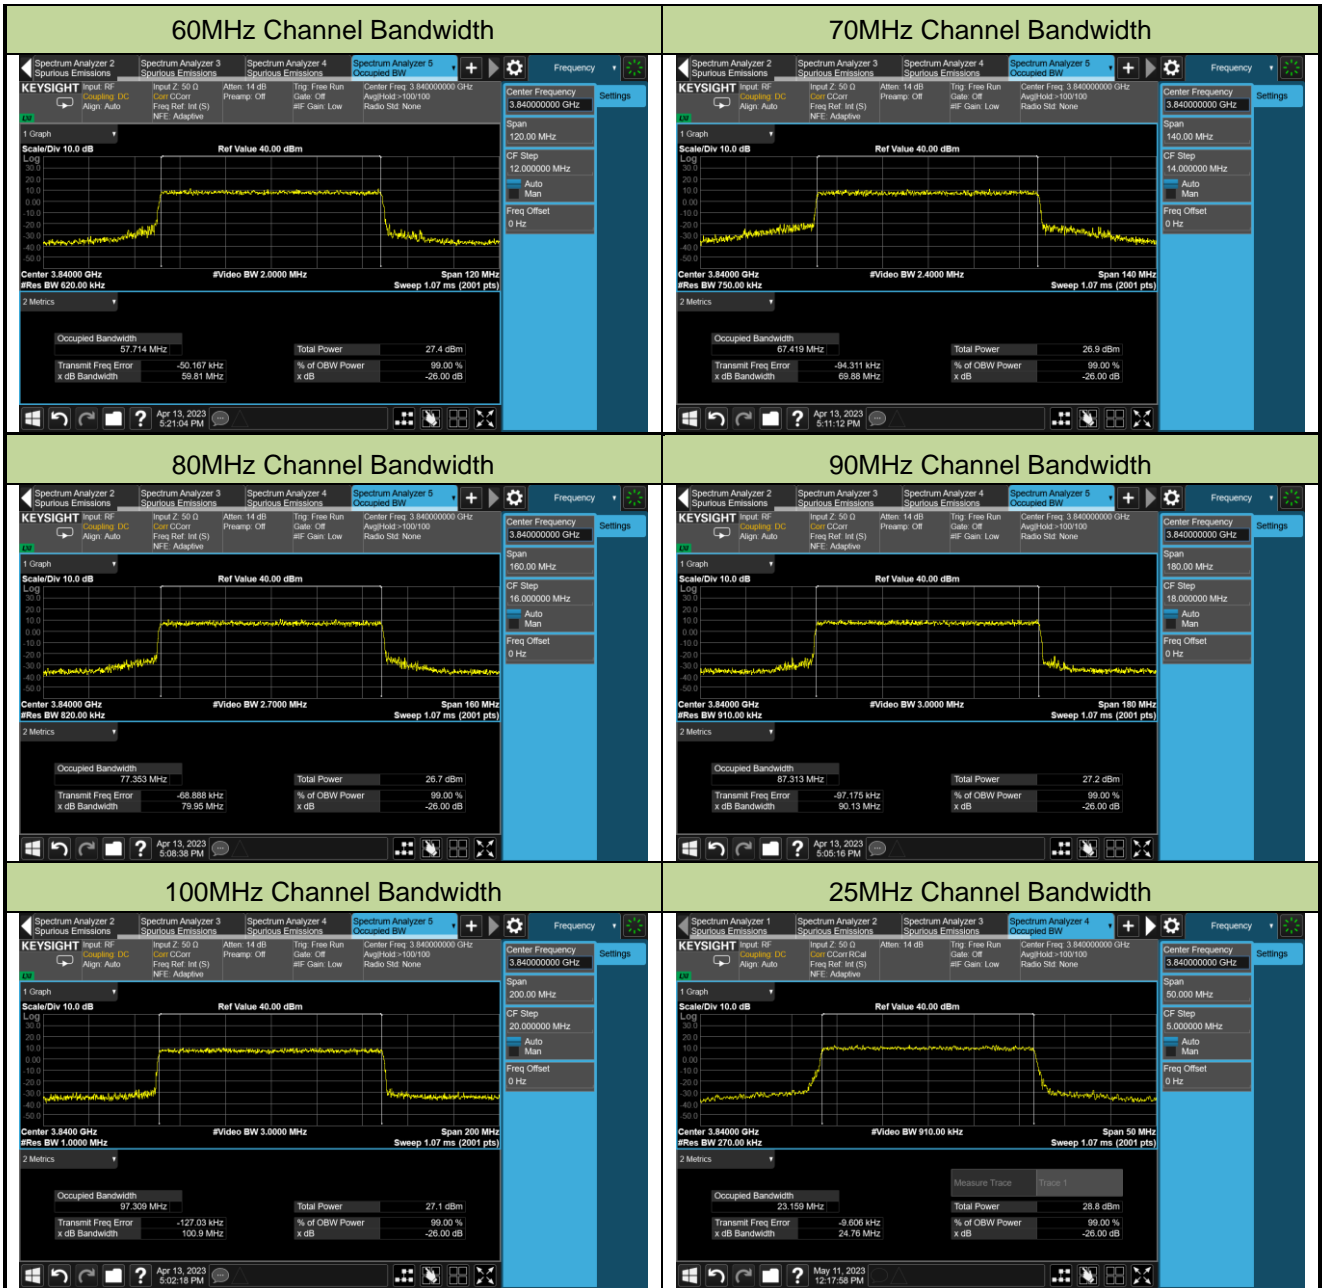


99% Bandwidth - 256QAM


10MHz Channel Bandwidth

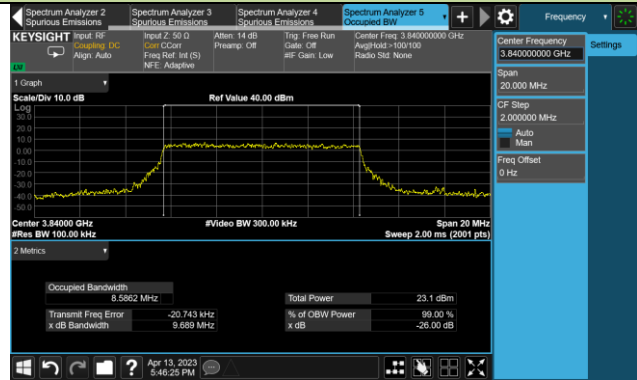


15MHz Channel Bandwidth

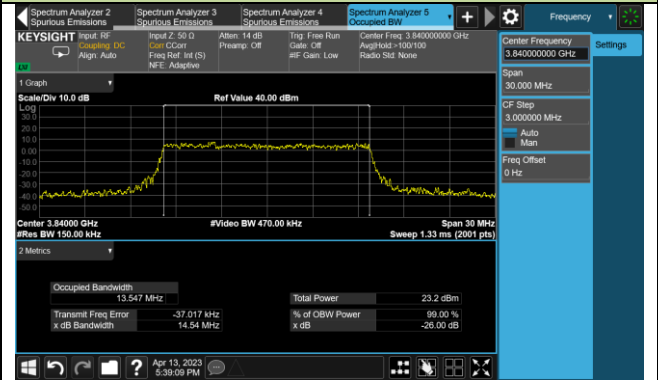


20MHz Channel Bandwidth

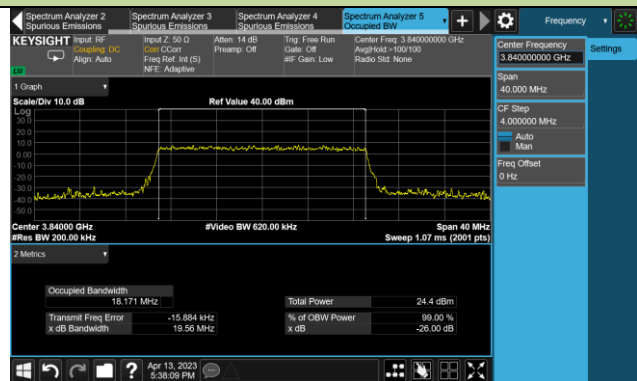


30MHz Channel Bandwidth

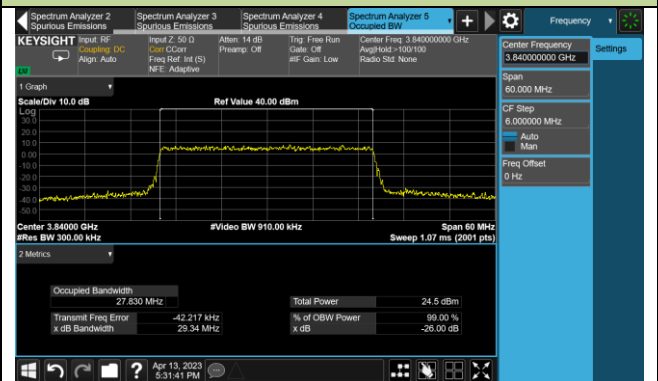


40MHz Channel Bandwidth

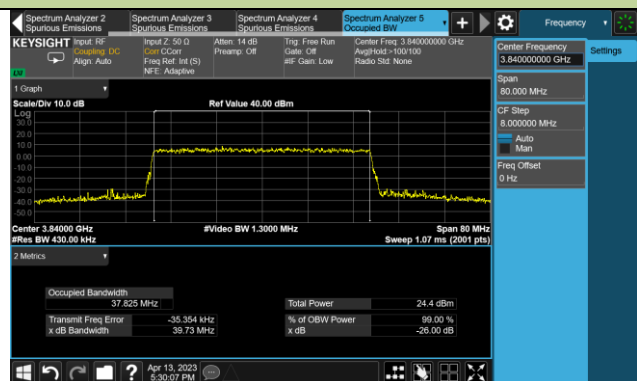

50MHz Channel Bandwidth

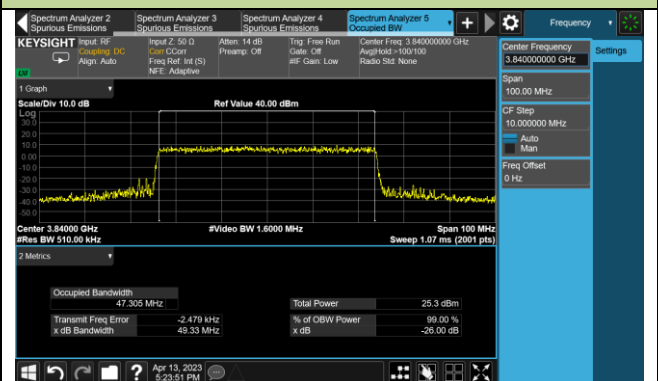

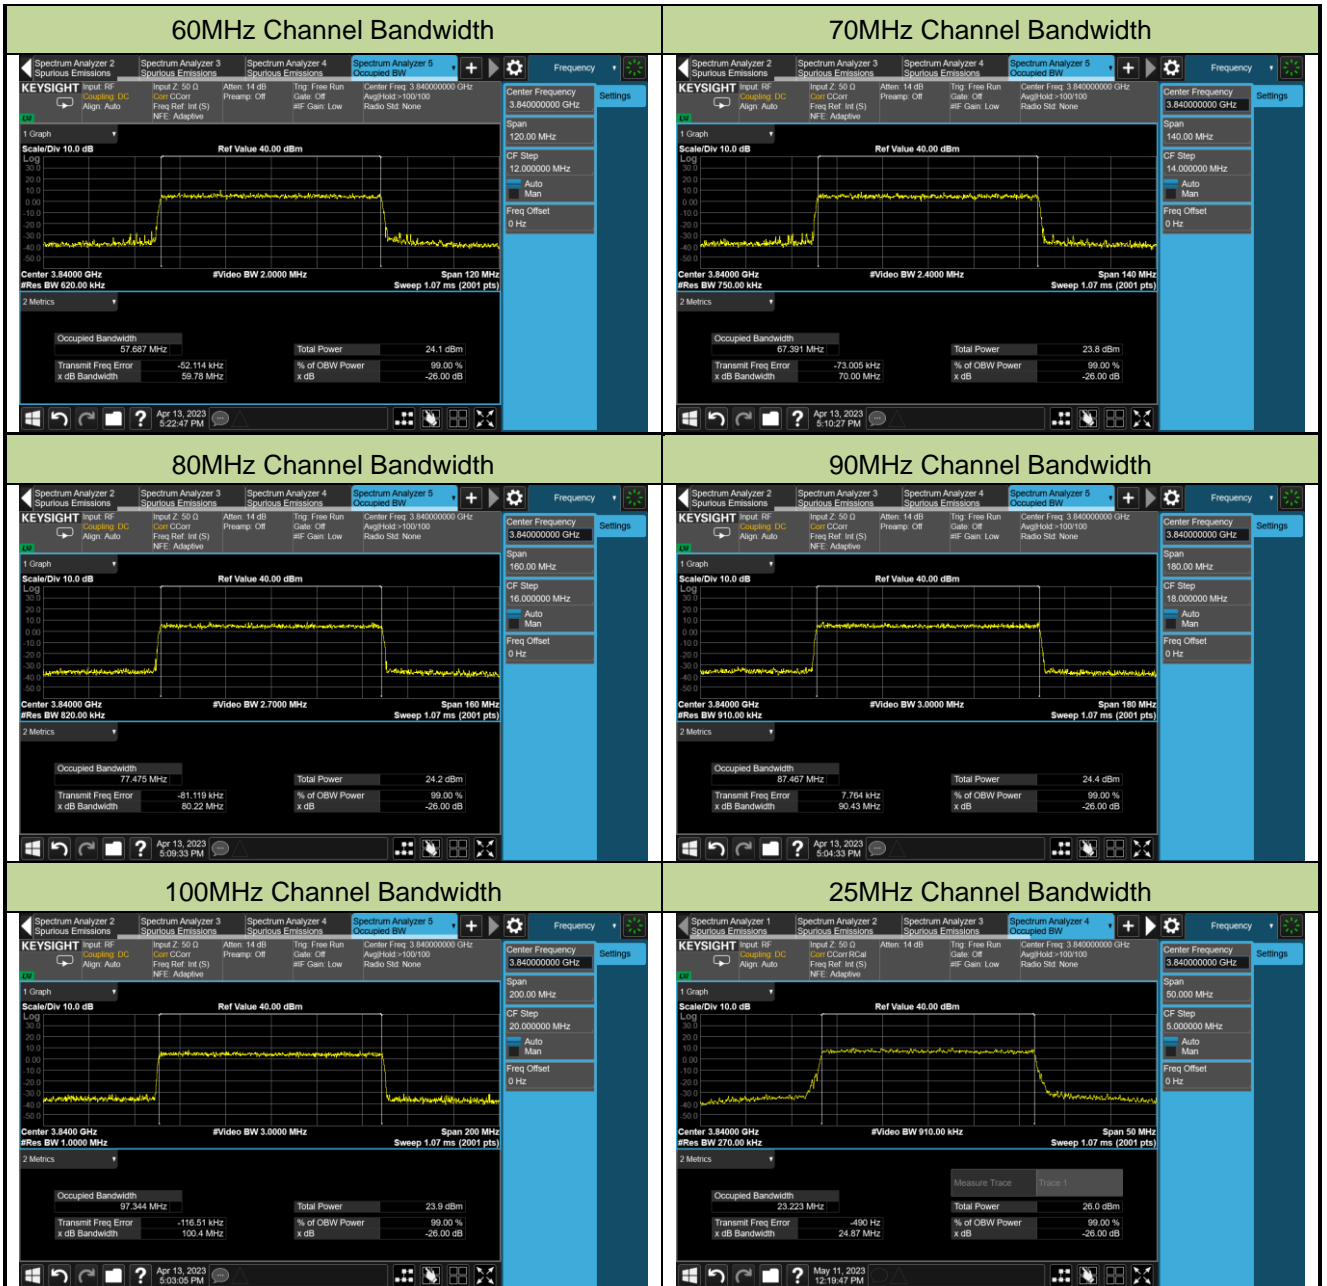

A.2 Frequency Stability Test Result

Test Site	WZ-TR3	Test Engineer	Cloud Guo
Test Date	2023/04/13 ~ 2023/04/14	Test Band	n41_UL MIMO_Port 3

Voltage	Temp (°C)	Frequency Range (MHz)		Frequency stability (ppm)	Within Authorized Frequency Block
		2496	2690		
		f _L	f _H		
Normal	+ 20 (Ref)	2496.9170	2689.0837	0	Pass
	+ 50	2496.9315	2689.1047	0.0121	Pass
	+ 40	2496.9377	2689.0965	-0.0004	Pass
	+ 30	2496.9326	2689.1047	0.0000	Pass
	+ 10	2496.9246	2689.1063	-0.0035	Pass
	0	2496.9238	2689.1043	0.0004	Pass
	- 10	2496.9273	2689.1048	0.0000	Pass
	- 20	2496.9143	2689.0698	-0.0012	Pass
	- 30	2496.9129	2689.0788	0.0013	Pass
15%	+ 20	2496.9208	2689.0904	-0.0013	Pass
-15%	+ 20	2496.9279	2689.0922	-0.2389	Pass

Test Site	WZ-TR3	Test Engineer	Cloud Guo
Test Date	2023/04/13 ~ 2023/04/14	Test Band	n77/78_UL MIMO (3450~3550MHz) Port 0

Voltage	Temp (°C)	Frequency Range (MHz)		Frequency stability (ppm)	Within Authorized Frequency Block
		3450	3550		
		f _L	f _H		
Normal	+ 20 (Ref)	3450.6790	3549.2531	0	Pass
	+ 50	3450.6798	3549.2677	0.0003	Pass
	+ 40	3450.6863	3549.2632	-0.0004	Pass
	+ 30	3450.6888	3549.2572	0.0005	Pass
	+ 10	3450.6813	3549.2613	0.0013	Pass
	0	3450.6897	3549.2724	0.0015	Pass
	- 10	3450.6897	3549.2658	0.0011	Pass
	- 20	3450.6920	3549.2524	-0.0006	Pass
	- 30	3450.6855	3549.2563	0.0001	Pass
15%	+ 20	3450.6828	3549.2477	-0.0010	Pass
-15%	+ 20	3450.6824	3549.2598	-0.0153	Pass

Test Site	WZ-TR3	Test Engineer	Cloud Guo
Test Date	2023/04/13 ~ 2023/04/14	Test Band	n77/78_UL MIMO (3700~3980MHz) Port 0

Voltage	Temp (°C)	Frequency Range (MHz)		Frequency stability (ppm)	Within Authorized Frequency Block
		3700	3980		
		f _L	f _H		
Normal	+ 20 (Ref)	3700.6942	3979.2601	0	Pass
	+ 50	3700.6963	3979.2800	0.0263	Pass
	+ 40	3700.6961	3979.2730	0.0276	Pass
	+ 30	3700.7079	3979.2743	0.0263	Pass
	+ 10	3700.6930	3979.2753	0.0271	Pass
	0	3700.6909	3979.2789	0.0249	Pass
	- 10	3700.6930	3979.2816	0.0272	Pass
	- 20	3700.6671	3979.2720	0.0264	Pass
	- 30	3700.6859	3979.2643	0.0264	Pass
15%	+ 20	3700.6837	3979.2688	0.0269	Pass
-15%	+ 20	3700.6912	3979.2680	0.0239	Pass

A.3 Equivalent Isotropically Radiated Power Test Result

Test Site	WZ-SR6	Test Engineer	Cloud Guo
Test Date	2023/03/23 ~ 2023/03/27 2023/05/10 ~ 2023/05/12	Test Band	n41_UL MIMO

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM PI/2 BPSK								
10	2501.01	12	6	26.38	25.65	29.04	31.11	< 33.01
		1	1	26.41	25.44	28.96	31.03	< 33.01
		1	22	26.41	25.73	29.09	31.16	< 33.01
		24	0	24.92	24.24	27.60	29.67	< 33.01
		1	0	20.38	19.66	23.05	25.12	< 33.01
		1	23	20.31	19.65	23.00	25.07	< 33.01
10	2592.99	12	6	26.55	25.69	29.15	31.22	< 33.01
		1	1	26.37	25.56	28.99	31.06	< 33.01
		1	22	26.50	25.69	29.12	31.19	< 33.01
		24	0	25.04	24.17	27.64	29.71	< 33.01
		1	0	20.49	19.65	23.10	25.17	< 33.01
		1	23	20.53	19.71	23.15	25.22	< 33.01
10	2685.00	12	6	26.58	25.77	29.20	31.27	< 33.01
		1	1	26.55	25.68	29.15	31.22	< 33.01
		1	22	26.59	25.84	29.24	31.31	< 33.01
		24	0	25.14	24.38	27.79	29.86	< 33.01
		1	0	20.63	19.81	23.25	25.32	< 33.01
		1	23	20.51	19.86	23.21	25.28	< 33.01
15	2503.50	18	9	26.45	25.66	29.08	31.15	< 33.01
		1	1	26.50	25.17	28.90	30.97	< 33.01
		1	36	26.45	25.58	29.05	31.12	< 33.01
		36	0	24.91	24.16	27.56	29.63	< 33.01
		1	0	20.45	19.67	23.09	25.16	< 33.01
		1	37	20.44	19.74	23.11	25.18	< 33.01

Note 1: Total Power (dBm) = $10 \cdot \log\{10^{\text{Port 0 Output Power} / 10} + 10^{\text{Port 1 Output Power} / 10}\}$

Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM PI/2 BPSK								
15	2592.99	18	9	26.47	25.65	29.09	31.16	< 33.01
		1	1	26.46	25.58	29.05	31.12	< 33.01
		1	36	26.61	25.61	29.15	31.22	< 33.01
		36	0	24.94	24.18	27.59	29.66	< 33.01
		1	0	20.48	19.67	23.10	25.17	< 33.01
		1	37	20.63	19.75	23.22	25.29	< 33.01
15	2682.48	18	9	26.48	25.72	29.13	31.20	< 33.01
		1	1	26.46	25.56	29.04	31.11	< 33.01
		1	36	26.48	25.72	29.13	31.20	< 33.01
		36	0	24.90	24.20	27.57	29.64	< 33.01
		1	0	20.52	19.72	23.15	25.22	< 33.01
		1	37	20.49	19.83	23.18	25.25	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM PI/2 BPSK								
20	2506.02	25	12	26.89	26.17	29.56	31.63	< 33.01
		1	1	26.70	26.05	29.40	31.47	< 33.01
		1	49	26.77	26.11	29.46	31.53	< 33.01
		50	0	25.25	24.56	27.93	30.00	< 33.01
		1	0	20.78	19.99	23.41	25.48	< 33.01
		1	50	20.71	20.10	23.43	25.50	< 33.01
20	2592.99	25	12	26.65	26.18	29.43	31.50	< 33.01
		1	1	26.68	26.12	29.42	31.49	< 33.01
		1	49	26.74	26.20	29.49	31.56	< 33.01
		50	0	25.19	24.67	27.95	30.02	< 33.01
		1	0	20.78	20.23	23.52	25.59	< 33.01
		1	50	20.68	20.36	23.53	25.60	< 33.01
20	2679.99	25	12	24.66	26.16	28.48	30.55	< 33.01
		1	1	26.74	26.14	29.46	31.53	< 33.01
		1	49	26.66	26.28	29.48	31.55	< 33.01
		50	0	25.17	24.63	27.92	29.99	< 33.01
		1	0	20.72	20.26	23.51	25.58	< 33.01
		1	50	20.65	20.40	23.54	25.61	< 33.01
30	2511	36	18	26.81	26.14	29.50	31.57	< 33.01
		1	1	26.83	26.19	29.53	31.60	< 33.01
		1	76	26.80	26.25	29.54	31.61	< 33.01
		75	0	25.26	24.72	28.01	30.08	< 33.01
		1	0	20.81	20.04	23.45	25.52	< 33.01
		1	77	20.76	20.36	23.57	25.64	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM PI/2 BPSK								
30	2592.99	36	18	26.74	26.16	29.47	31.54	< 33.01
		1	1	26.78	26.19	29.51	31.58	< 33.01
		1	76	26.79	26.35	29.59	31.66	< 33.01
		75	0	25.27	24.72	28.01	30.08	< 33.01
		1	0	20.82	20.27	23.56	25.63	< 33.01
		1	77	20.87	20.54	23.72	25.79	< 33.01
30	2674.98	36	18	26.78	26.14	29.48	31.55	< 33.01
		1	1	26.66	26.04	29.37	31.44	< 33.01
		1	76	26.76	26.35	29.57	31.64	< 33.01
		75	0	25.25	24.63	27.96	30.03	< 33.01
		1	0	20.78	20.23	23.52	25.59	< 33.01
		1	77	20.81	20.57	23.70	25.77	< 33.01
40	2516.01	50	25	26.89	26.36	29.64	31.71	< 33.01
		1	1	26.93	26.20	29.59	31.66	< 33.01
		1	104	26.79	26.25	29.54	31.61	< 33.01
		100	0	25.30	24.75	28.04	30.11	< 33.01
		1	0	20.86	20.12	23.52	25.59	< 33.01
		1	105	20.76	20.32	23.56	25.63	< 33.01
40	2592.99	50	25	26.42	25.98	29.22	31.29	< 33.01
		1	1	26.50	26.07	29.30	31.37	< 33.01
		1	104	26.56	26.23	29.41	31.48	< 33.01
		100	0	24.91	24.56	27.75	29.82	< 33.01
		1	0	20.65	19.98	23.34	25.41	< 33.01
		1	105	20.55	20.30	23.44	25.51	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM PI/2 BPSK								
40	2670	50	25	26.44	26.05	29.26	31.33	< 33.01
		1	1	26.43	26.03	29.24	31.31	< 33.01
		1	104	26.45	26.21	29.34	31.41	< 33.01
		100	0	24.91	24.57	27.75	29.82	< 33.01
		1	0	20.59	20.07	23.35	25.42	< 33.01
		1	105	20.51	20.36	23.45	25.52	< 33.01
50	2521.02	64	32	26.65	26.41	29.54	31.61	< 33.01
		1	1	26.75	26.03	29.42	31.49	< 33.01
		1	131	26.43	26.27	29.36	31.43	< 33.01
		128	0	25.25	24.82	28.05	30.12	< 33.01
		1	0	20.87	20.18	23.55	25.62	< 33.01
		1	132	20.46	20.25	23.37	25.44	< 33.01
50	2592.99	64	32	26.70	26.14	29.44	31.51	< 33.01
		1	1	26.58	26.03	29.32	31.39	< 33.01
		1	131	26.66	26.33	29.51	31.58	< 33.01
		128	0	25.16	24.64	27.92	29.99	< 33.01
		1	0	20.79	19.93	23.39	25.46	< 33.01
		1	132	20.68	20.52	23.61	25.68	< 33.01
50	2664.99	64	32	26.52	26.18	29.36	31.43	< 33.01
		1	1	26.40	26.02	29.22	31.29	< 33.01
		1	131	26.50	26.24	29.38	31.45	< 33.01
		128	0	25.03	24.76	27.91	29.98	< 33.01
		1	0	20.59	19.98	23.31	25.38	< 33.01
		1	132	20.59	20.35	23.48	25.55	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM PI/2 BPSK								
60	2526	81	40	26.75	26.47	29.62	31.69	< 33.01
		1	1	26.81	26.02	29.44	31.51	< 33.01
		1	160	26.45	26.33	29.40	31.47	< 33.01
		162	0	25.25	24.81	28.05	30.12	< 33.01
		1	0	20.94	20.02	23.51	25.58	< 33.01
		1	161	20.64	20.30	23.48	25.55	< 33.01
60	2592.99	81	40	26.75	26.14	29.47	31.54	< 33.01
		1	1	26.63	26.03	29.35	31.42	< 33.01
		1	160	26.83	26.35	29.61	31.68	< 33.01
		162	0	25.27	24.62	27.97	30.04	< 33.01
		1	0	20.87	19.87	23.41	25.48	< 33.01
		1	161	20.83	20.40	23.63	25.70	< 33.01
60	2659.98	81	40	26.69	26.28	29.50	31.57	< 33.01
		1	1	26.58	26.03	29.32	31.39	< 33.01
		1	160	26.56	26.30	29.44	31.51	< 33.01
		162	0	25.12	24.77	27.96	30.03	< 33.01
		1	0	20.65	19.92	23.31	25.38	< 33.01
		1	161	20.58	20.41	23.51	25.58	< 33.01
70	2531.01	90	45	26.76	26.23	29.51	31.58	< 33.01
		1	1	26.81	26.05	29.46	31.53	< 33.01
		1	187	26.60	26.35	29.49	31.56	< 33.01
		180	0	25.35	24.77	28.08	30.15	< 33.01
		1	0	21.01	19.90	23.50	25.57	< 33.01
		1	188	20.63	20.32	23.49	25.56	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM PI/2 BPSK								
70	2592.99	90	45	26.74	26.09	29.44	31.51	< 33.01
		1	1	26.67	25.94	29.33	31.40	< 33.01
		1	187	26.74	26.24	29.51	31.58	< 33.01
		180	0	25.20	24.70	27.97	30.04	< 33.01
		1	0	20.87	19.84	23.40	25.47	< 33.01
		1	188	20.73	20.34	23.55	25.62	< 33.01
70	2655	90	45	26.63	26.15	29.41	31.48	< 33.01
		1	1	26.57	25.93	29.27	31.34	< 33.01
		1	187	26.61	26.22	29.43	31.50	< 33.01
		180	0	25.18	24.74	27.98	30.05	< 33.01
		1	0	20.83	19.90	23.40	25.47	< 33.01
		1	188	20.68	20.32	23.51	25.58	< 33.01
80	2536.02	108	54	26.75	26.34	29.56	31.63	< 33.01
		1	1	26.89	26.07	29.51	31.58	< 33.01
		1	215	26.71	26.49	29.61	31.68	< 33.01
		216	0	25.30	24.91	28.12	30.19	< 33.01
		1	0	21.05	19.89	23.52	25.59	< 33.01
		1	216	20.75	20.46	23.62	25.69	< 33.01
80	2592.99	108	54	26.65	25.98	29.34	31.41	< 33.01
		1	1	26.50	25.67	29.12	31.19	< 33.01
		1	215	26.73	26.24	29.50	31.57	< 33.01
		216	0	25.12	24.62	27.89	29.96	< 33.01
		1	0	20.73	19.58	23.20	25.27	< 33.01
		1	216	20.73	20.32	23.54	25.61	< 33.01

Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$

Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM PI/2 BPSK								
80	2649.99	108	54	26.53	26.17	29.36	31.43	< 33.01
		1	1	26.15	25.66	28.92	30.99	< 33.01
		1	215	26.47	26.19	29.34	31.41	< 33.01
		216	0	24.94	24.62	27.79	29.86	< 33.01
		1	0	20.46	19.57	23.05	25.12	< 33.01
		1	216	20.48	20.21	23.36	25.43	< 33.01
90	2541	120	60	26.65	26.13	29.41	31.48	< 33.01
		1	1	26.80	25.93	29.40	31.47	< 33.01
		1	243	26.57	26.40	29.50	31.57	< 33.01
		243	0	25.21	24.72	27.98	30.05	< 33.01
		1	0	20.84	19.68	23.31	25.38	< 33.01
		1	244	20.52	20.45	23.50	25.57	< 33.01
90	2592.99	120	60	26.69	26.03	29.38	31.45	< 33.01
		1	1	26.52	25.65	29.12	31.19	< 33.01
		1	243	26.67	26.27	29.48	31.55	< 33.01
		243	0	25.15	24.58	27.88	29.95	< 33.01
		1	0	20.75	19.72	23.28	25.35	< 33.01
		1	244	20.84	20.49	23.68	25.75	< 33.01
90	2644.98	120	60	26.68	26.12	29.42	31.49	< 33.01
		1	1	26.16	25.58	28.89	30.96	< 33.01
		1	243	26.60	26.24	29.43	31.50	< 33.01
		243	0	25.04	24.59	27.83	29.90	< 33.01
		1	0	20.62	19.53	23.12	25.19	< 33.01
		1	244	20.68	20.47	23.59	25.66	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM PI/2 BPSK								
100	2546.01	135	67	26.58	26.23	29.42	31.49	< 33.01
		1	1	26.78	25.92	29.38	31.45	< 33.01
		1	271	26.41	26.51	29.47	31.54	< 33.01
		270	0	25.27	24.77	28.04	30.11	< 33.01
		1	0	20.84	19.53	23.24	25.31	< 33.01
		1	272	20.46	20.48	23.48	25.55	< 33.01
100	2592.99	135	67	26.68	26.10	29.41	31.48	< 33.01
		1	1	26.50	25.58	29.07	31.14	< 33.01
		1	271	26.93	26.43	29.70	31.77	< 33.01
		270	0	25.22	24.56	27.91	29.98	< 33.01
		1	0	20.78	19.56	23.22	25.29	< 33.01
		1	272	20.90	20.44	23.69	25.76	< 33.01
100	2640	135	67	26.70	26.12	29.43	31.50	< 33.01
		1	1	26.47	25.63	29.08	31.15	< 33.01
		1	271	26.70	26.34	29.53	31.60	< 33.01
		270	0	25.15	24.55	27.87	29.94	< 33.01
		1	0	20.71	19.38	23.11	25.18	< 33.01
		1	272	20.72	20.36	23.55	25.62	< 33.01

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM QPSK								
10	2501.01	12	6	26.36	25.64	29.03	31.10	< 33.01
		1	1	26.36	25.31	28.88	30.95	< 33.01
		1	22	26.39	25.64	29.04	31.11	< 33.01
		24	0	24.41	23.70	27.08	29.15	< 33.01
		1	0	19.90	19.18	22.57	24.64	< 33.01
		1	23	19.84	19.22	22.55	24.62	< 33.01
10	2592.99	12	6	26.57	25.61	29.13	31.20	< 33.01
		1	1	26.35	25.58	28.99	31.06	< 33.01
		1	22	26.48	25.58	29.06	31.13	< 33.01
		24	0	24.56	23.70	27.16	29.23	< 33.01
		1	0	19.94	19.11	22.56	24.63	< 33.01
		1	23	19.98	19.16	22.60	24.67	< 33.01
10	2685.00	12	6	26.57	25.78	29.20	31.27	< 33.01
		1	1	26.62	25.71	29.20	31.27	< 33.01
		1	22	26.55	25.82	29.21	31.28	< 33.01
		24	0	24.61	23.84	27.25	29.32	< 33.01
		1	0	20.08	19.26	22.70	24.77	< 33.01
		1	23	20.05	19.35	22.72	24.79	< 33.01
15	2503.50	18	9	26.43	25.36	28.94	31.01	< 33.01
		1	1	26.51	25.05	28.85	30.92	< 33.01
		1	36	26.48	25.63	29.09	31.16	< 33.01
		36	0	24.39	23.67	27.06	29.13	< 33.01
		1	0	19.91	19.10	22.53	24.60	< 33.01
		1	37	19.85	19.21	22.55	24.62	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM QPSK								
15	2592.99	18	9	26.53	25.61	29.10	31.17	< 33.01
		1	1	26.45	25.53	29.02	31.09	< 33.01
		1	36	26.57	25.60	29.12	31.19	< 33.01
		36	0	24.50	23.62	27.09	29.16	< 33.01
		1	0	19.98	19.17	22.60	24.67	< 33.01
		1	37	20.09	19.26	22.71	24.78	< 33.01
15	2682.48	18	9	26.52	25.73	29.15	31.22	< 33.01
		1	1	26.38	25.65	29.04	31.11	< 33.01
		1	36	26.59	25.72	29.19	31.26	< 33.01
		36	0	24.42	23.74	27.10	29.17	< 33.01
		1	0	120.05	19.16	120.05	122.12	< 33.01
		1	37	19.95	19.28	22.64	24.71	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM QPSK								
20	2506.02	25	12	26.82	26.13	29.50	31.57	< 33.01
		1	1	26.80	25.98	29.42	31.49	< 33.01
		1	49	26.71	26.03	29.39	31.46	< 33.01
		50	0	24.76	24.17	27.49	29.56	< 33.01
		1	0	20.18	19.39	22.81	24.88	< 33.01
		1	50	20.24	19.56	22.92	24.99	< 33.01
20	2592.99	25	12	26.70	26.11	29.43	31.50	< 33.01
		1	1	26.69	26.04	29.39	31.46	< 33.01
		1	49	26.72	26.13	29.45	31.52	< 33.01
		50	0	24.70	24.20	27.47	29.54	< 33.01
		1	0	20.15	19.58	22.88	24.95	< 33.01
		1	50	20.22	19.75	23.00	25.07	< 33.01
20	2679.99	25	12	26.59	26.15	29.39	31.46	< 33.01
		1	1	26.62	26.07	29.36	31.43	< 33.01
		1	49	26.69	26.25	29.49	31.56	< 33.01
		50	0	24.63	24.20	27.43	29.50	< 33.01
		1	0	20.26	19.77	23.03	25.10	< 33.01
		1	50	20.12	19.93	23.04	25.11	< 33.01
30	2511	36	18	26.82	26.19	29.53	31.60	< 33.01
		1	1	26.82	26.13	29.50	31.57	< 33.01
		1	76	26.81	26.27	29.56	31.63	< 33.01
		75	0	24.86	24.32	27.61	29.68	< 33.01
		1	0	20.27	19.60	22.96	25.03	< 33.01
		1	77	20.22	19.63	22.95	25.02	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM QPSK								
30	2592.99	36	18	26.76	26.20	29.50	31.57	< 33.01
		1	1	26.77	26.13	29.47	31.54	< 33.01
		1	76	26.84	26.35	29.61	31.68	< 33.01
		75	0	24.75	24.32	27.55	29.62	< 33.01
		1	0	20.31	19.73	23.04	25.11	< 33.01
		1	77	20.32	20.01	23.18	25.25	< 33.01
30	2674.98	36	18	26.72	26.20	29.48	31.55	< 33.01
		1	1	26.68	26.04	29.38	31.45	< 33.01
		1	76	26.73	26.30	29.53	31.60	< 33.01
		75	0	24.78	24.26	27.54	29.61	< 33.01
		1	0	20.24	19.61	22.95	25.02	< 33.01
		1	77	20.32	20.15	23.25	25.32	< 33.01
40	2516.01	50	25	26.85	26.24	29.57	31.64	< 33.01
		1	1	26.90	26.18	29.57	31.64	< 33.01
		1	104	26.85	26.23	29.56	31.63	< 33.01
		100	0	24.82	24.25	27.55	29.62	< 33.01
		1	0	20.41	19.64	23.05	25.12	< 33.01
		1	105	20.32	19.87	23.11	25.18	< 33.01
40	2592.99	50	25	26.32	25.91	29.13	31.20	< 33.01
		1	1	26.55	26.04	29.31	31.38	< 33.01
		1	104	26.59	26.21	29.41	31.48	< 33.01
		100	0	24.46	24.02	27.26	29.33	< 33.01
		1	0	20.15	19.53	22.86	24.93	< 33.01
		1	105	20.12	19.78	22.96	25.03	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM QPSK								
40	2670	50	25	26.42	26.15	29.30	31.37	< 33.01
		1	1	26.51	26.01	29.28	31.35	< 33.01
		1	104	26.55	26.22	29.40	31.47	< 33.01
		100	0	24.40	24.13	27.28	29.35	< 33.01
		1	0	20.12	19.53	22.85	24.92	< 33.01
		1	105	20.03	19.86	22.96	25.03	< 33.01
50	2521.02	64	32	26.63	26.21	29.44	31.51	< 33.01
		1	1	26.75	25.96	29.38	31.45	< 33.01
		1	131	26.55	26.31	29.44	31.51	< 33.01
		128	0	24.63	24.27	27.46	29.53	< 33.01
		1	0	20.27	19.61	22.96	25.03	< 33.01
		1	132	20.01	19.89	22.96	25.03	< 33.01
50	2592.99	64	32	26.64	26.02	29.35	31.42	< 33.01
		1	1	26.61	26.01	29.33	31.40	< 33.01
		1	131	26.70	26.32	29.52	31.59	< 33.01
		128	0	24.69	24.22	27.47	29.54	< 33.01
		1	0	20.32	19.35	22.87	24.94	< 33.01
		1	132	20.17	20.05	23.12	25.19	< 33.01
50	2664.99	64	32	26.45	26.13	29.30	31.37	< 33.01
		1	1	26.49	26.00	29.26	31.33	< 33.01
		1	131	26.43	26.23	29.34	31.41	< 33.01
		128	0	24.43	24.21	27.33	29.40	< 33.01
		1	0	19.99	19.46	22.74	24.81	< 33.01
		1	132	19.95	20.02	23.00	25.07	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM QPSK								
60	2526	81	40	26.83	26.34	29.60	31.67	< 33.01
		1	1	26.82	26.03	29.45	31.52	< 33.01
		1	160	26.51	26.32	29.43	31.50	< 33.01
		162	0	24.76	24.36	27.57	29.64	< 33.01
		1	0	20.49	19.75	23.15	25.22	< 33.01
		1	161	20.06	19.81	22.95	25.02	< 33.01
60	2592.99	81	40	26.78	26.06	29.45	31.52	< 33.01
		1	1	26.62	26.01	29.34	31.41	< 33.01
		1	160	26.78	26.42	29.61	31.68	< 33.01
		162	0	24.77	24.13	27.47	29.54	< 33.01
		1	0	20.36	19.34	22.89	24.96	< 33.01
		1	161	20.37	20.02	23.21	25.28	< 33.01
60	2659.98	81	40	26.82	26.27	29.56	31.63	< 33.01
		1	1	26.74	26.02	29.41	31.48	< 33.01
		1	160	26.75	26.41	29.59	31.66	< 33.01
		162	0	24.76	24.30	27.55	29.62	< 33.01
		1	0	20.31	19.51	22.94	25.01	< 33.01
		1	161	20.16	19.88	23.03	25.10	< 33.01
70	2531.01	90	45	26.74	26.22	29.50	31.57	< 33.01
		1	1	26.86	26.13	29.52	31.59	< 33.01
		1	187	26.59	26.32	29.47	31.54	< 33.01
		180	0	24.72	24.30	27.53	29.60	< 33.01
		1	0	20.40	19.53	23.00	25.07	< 33.01
		1	188	20.12	19.84	22.99	25.06	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM QPSK								
70	2592.99	90	45	26.68	26.13	29.42	31.49	< 33.01
		1	1	26.68	25.93	29.33	31.40	< 33.01
		1	187	26.76	26.32	29.56	31.63	< 33.01
		180	0	24.70	24.19	27.46	29.53	< 33.01
		1	0	20.39	19.45	22.96	25.03	< 33.01
		1	188	20.32	19.89	23.12	25.19	< 33.01
70	2655	90	45	26.68	26.18	29.45	31.52	< 33.01
		1	1	26.59	25.93	29.28	31.35	< 33.01
		1	187	26.63	26.23	29.44	31.51	< 33.01
		180	0	24.63	24.20	27.43	29.50	< 33.01
		1	0	20.12	19.27	22.73	24.80	< 33.01
		1	188	20.08	19.84	22.97	25.04	< 33.01
80	2536.02	108	54	26.74	26.34	29.55	31.62	< 33.01
		1	1	26.92	26.18	29.58	31.65	< 33.01
		1	215	26.64	26.42	29.54	31.61	< 33.01
		216	0	24.80	24.37	27.60	29.67	< 33.01
		1	0	20.46	19.47	23.00	25.07	< 33.01
		1	216	20.22	19.99	23.12	25.19	< 33.01
80	2592.99	108	54	26.60	26.09	29.36	31.43	< 33.01
		1	1	26.47	25.61	29.07	31.14	< 33.01
		1	215	26.67	26.34	29.52	31.59	< 33.01
		216	0	24.55	24.03	27.31	29.38	< 33.01
		1	0	20.20	19.24	22.76	24.83	< 33.01
		1	216	20.24	19.85	23.06	25.13	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM QPSK								
80	2649.99	108	54	26.59	26.06	29.34	31.41	< 33.01
		1	1	26.21	25.70	28.97	31.04	< 33.01
		1	215	26.43	26.20	29.33	31.40	< 33.01
		216	0	24.54	24.28	27.42	29.49	< 33.01
		1	0	20.01	19.04	22.56	24.63	< 33.01
		1	216	20.06	19.83	22.96	25.03	< 33.01
90	2541	120	60	26.63	26.08	29.37	31.44	< 33.01
		1	1	26.73	25.97	29.38	31.45	< 33.01
		1	243	26.47	26.28	29.39	31.46	< 33.01
		243	0	24.63	24.18	27.42	29.49	< 33.01
		1	0	20.33	19.22	22.82	24.89	< 33.01
		1	244	20.06	19.89	22.99	25.06	< 33.01
90	2592.99	120	60	26.68	26.06	29.39	31.46	< 33.01
		1	1	26.52	25.64	29.11	31.18	< 33.01
		1	243	26.75	26.32	29.55	31.62	< 33.01
		243	0	24.65	24.12	27.40	29.47	< 33.01
		1	0	20.28	19.21	22.79	24.86	< 33.01
		1	244	20.37	19.95	23.18	25.25	< 33.01
90	2644.98	120	60	26.62	26.05	29.35	31.42	< 33.01
		1	1	26.31	25.69	29.02	31.09	< 33.01
		1	243	26.58	26.21	29.41	31.48	< 33.01
		243	0	24.57	24.31	27.45	29.52	< 33.01
		1	0	20.03	18.95	22.53	24.60	< 33.01
		1	244	20.12	19.83	22.99	25.06	< 33.01

Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$

Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM QPSK								
100	2546.01	135	67	26.61	26.22	29.43	31.50	< 33.01
		1	1	26.80	25.98	29.42	31.49	< 33.01
		1	271	26.48	26.49	29.50	31.57	< 33.01
		270	0	24.79	24.28	27.55	29.62	< 33.01
		1	0	20.37	19.45	22.94	25.01	< 33.01
		1	272	19.95	20.08	23.03	25.10	< 33.01
100	2592.99	135	67	26.68	26.02	29.37	31.44	< 33.01
		1	1	26.54	25.73	29.16	31.23	< 33.01
		1	271	26.78	26.45	29.63	31.70	< 33.01
		270	0	24.68	24.00	27.36	29.43	< 33.01
		1	0	20.26	19.07	22.72	24.79	< 33.01
		1	272	20.39	19.95	23.19	25.26	< 33.01
100	2640	135	67	26.69	26.10	29.42	31.49	< 33.01
		1	1	26.48	25.73	29.13	31.20	< 33.01
		1	271	26.72	26.36	29.55	31.62	< 33.01
		270	0	24.53	24.13	27.34	29.41	< 33.01
		1	0	20.24	18.90	22.63	24.70	< 33.01
		1	272	20.20	19.86	23.04	25.11	< 33.01

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM 16QAM								
10	2501.01	12	6	25.30	24.61	27.98	30.05	< 33.01
		1	1	25.41	24.39	27.94	30.01	< 33.01
		1	22	25.46	24.80	28.15	30.22	< 33.01
		24	0	23.47	22.82	26.17	28.24	< 33.01
		1	0	19.93	19.24	22.61	24.68	< 33.01
		1	23	19.88	19.29	22.61	24.68	< 33.01
10	2592.99	12	6	25.48	24.67	28.10	30.17	< 33.01
		1	1	25.52	24.59	28.09	30.16	< 33.01
		1	22	25.51	24.64	28.11	30.18	< 33.01
		24	0	23.54	22.71	26.16	28.23	< 33.01
		1	0	19.98	19.10	22.57	24.64	< 33.01
		1	23	19.95	19.16	22.58	24.65	< 33.01
10	2685.00	12	6	25.54	24.79	28.19	30.26	< 33.01
		1	1	25.48	24.54	28.05	30.12	< 33.01
		1	22	25.52	24.67	28.13	30.20	< 33.01
		24	0	23.65	22.90	26.30	28.37	< 33.01
		1	0	20.05	19.19	22.65	24.72	< 33.01
		1	23	20.05	19.31	22.71	24.78	< 33.01
15	2503.50	18	9	25.41	24.43	27.96	30.03	< 33.01
		1	1	25.36	24.01	27.75	29.82	< 33.01
		1	36	25.22	24.51	27.89	29.96	< 33.01
		36	0	23.39	22.64	26.04	28.11	< 33.01
		1	0	19.91	19.08	22.53	24.60	< 33.01
		1	37	19.68	19.01	22.37	24.44	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM 16QAM								
15	2592.99	18	9	25.44	24.59	28.05	30.12	< 33.01
		1	1	25.38	24.48	27.96	30.03	< 33.01
		1	36	25.52	24.58	28.09	30.16	< 33.01
		36	0	23.49	22.67	26.11	28.18	< 33.01
		1	0	19.88	19.01	22.48	24.55	< 33.01
		1	37	20.14	19.31	22.76	24.83	< 33.01
15	2682.48	18	9	25.46	24.68	28.10	30.17	< 33.01
		1	1	25.39	24.61	28.03	30.10	< 33.01
		1	36	25.46	24.68	28.10	30.17	< 33.01
		36	0	23.40	22.70	26.07	28.14	< 33.01
		1	0	19.81	18.91	22.39	24.46	< 33.01
		1	37	19.84	19.16	22.52	24.59	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM 16QAM								
20	2506.02	25	12	25.75	25.16	28.48	30.55	< 33.01
		1	1	25.53	24.93	28.25	30.32	< 33.01
		1	49	25.56	24.92	28.26	30.33	< 33.01
		50	0	23.77	23.10	26.46	28.53	< 33.01
		1	0	20.23	19.49	22.89	24.96	< 33.01
		1	50	19.96	19.35	22.68	24.75	< 33.01
20	2592.99	25	12	25.73	25.13	28.45	30.52	< 33.01
		1	1	25.69	25.03	28.38	30.45	< 33.01
		1	49	25.78	25.23	28.52	30.59	< 33.01
		50	0	23.67	23.15	26.43	28.50	< 33.01
		1	0	20.14	19.55	22.87	24.94	< 33.01
		1	50	20.21	19.89	23.06	25.13	< 33.01
20	2679.99	25	12	25.70	25.17	28.45	30.52	< 33.01
		1	1	25.48	24.84	28.18	30.25	< 33.01
		1	49	25.30	25.08	28.20	30.27	< 33.01
		50	0	23.58	23.29	26.45	28.52	< 33.01
		1	0	20.05	19.66	22.87	24.94	< 33.01
		1	50	20.01	19.64	22.84	24.91	< 33.01
30	2511	36	18	25.82	25.14	28.50	30.57	< 33.01
		1	1	25.72	25.00	28.39	30.46	< 33.01
		1	76	25.57	25.11	28.36	30.43	< 33.01
		75	0	23.90	23.23	26.59	28.66	< 33.01
		1	0	20.21	19.56	22.91	24.98	< 33.01
		1	77	20.26	19.74	23.02	25.09	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM 16QAM								
30	2592.99	36	18	25.73	25.22	28.49	30.56	< 33.01
		1	1	25.68	25.08	28.40	30.47	< 33.01
		1	76	25.76	25.33	28.56	30.63	< 33.01
		75	0	23.80	23.35	26.59	28.66	< 33.01
		1	0	20.27	19.72	23.01	25.08	< 33.01
		1	77	20.28	20.02	23.16	25.23	< 33.01
30	2674.98	36	18	25.73	25.17	28.47	30.54	< 33.01
		1	1	25.49	25.01	28.27	30.34	< 33.01
		1	76	25.67	25.32	28.51	30.58	< 33.01
		75	0	23.80	23.23	26.53	28.60	< 33.01
		1	0	20.06	19.40	22.75	24.82	< 33.01
		1	77	20.01	19.83	22.93	25.00	< 33.01
40	2516.01	50	25	25.76	25.22	28.51	30.58	< 33.01
		1	1	25.82	25.13	28.50	30.57	< 33.01
		1	104	25.77	25.28	28.54	30.61	< 33.01
		100	0	23.79	23.24	26.53	28.60	< 33.01
		1	0	20.42	19.57	23.03	25.10	< 33.01
		1	105	20.29	19.88	23.10	25.17	< 33.01
40	2592.99	50	25	25.76	25.18	28.49	30.56	< 33.01
		1	1	25.68	25.17	28.44	30.51	< 33.01
		1	104	26.00	25.48	28.76	30.83	< 33.01
		100	0	23.82	23.37	26.61	28.68	< 33.01
		1	0	20.34	19.62	23.01	25.08	< 33.01
		1	105	20.35	20.00	23.19	25.26	< 33.01

Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$

Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM 16QAM								
40	2670	50	25	25.41	25.12	28.28	30.35	< 33.01
		1	1	25.52	25.05	28.30	30.37	< 33.01
		1	104	25.56	25.34	28.46	30.53	< 33.01
		100	0	23.41	23.12	26.28	28.35	< 33.01
		1	0	19.82	19.30	22.58	24.65	< 33.01
		1	105	19.77	19.57	22.68	24.75	< 33.01
50	2521.02	64	32	25.68	25.18	28.45	30.52	< 33.01
		1	1	25.46	24.82	28.16	30.23	< 33.01
		1	131	25.22	25.02	28.13	30.20	< 33.01
		128	0	23.70	23.33	26.53	28.60	< 33.01
		1	0	20.09	19.22	22.69	24.76	< 33.01
		1	132	19.65	19.45	22.56	24.63	< 33.01
50	2592.99	64	32	25.66	25.07	28.39	30.46	< 33.01
		1	1	25.52	24.82	28.19	30.26	< 33.01
		1	131	25.55	25.27	28.42	30.49	< 33.01
		128	0	23.70	23.14	26.44	28.51	< 33.01
		1	0	20.34	19.33	22.87	24.94	< 33.01
		1	132	20.23	20.12	23.19	25.26	< 33.01
50	2664.99	64	32	25.44	25.16	28.31	30.38	< 33.01
		1	1	25.27	25.05	28.17	30.24	< 33.01
		1	131	25.34	25.26	28.31	30.38	< 33.01
		128	0	23.48	23.19	26.35	28.42	< 33.01
		1	0	19.96	19.33	22.67	24.74	< 33.01
		1	132	19.86	19.76	22.82	24.89	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM 16QAM								
60	2526	81	40	25.73	25.33	28.54	30.61	< 33.01
		1	1	25.65	24.83	28.27	30.34	< 33.01
		1	160	25.34	25.18	28.27	30.34	< 33.01
		162	0	23.77	23.29	26.55	28.62	< 33.01
		1	0	20.21	19.51	22.88	24.95	< 33.01
		1	161	19.75	19.63	22.70	24.77	< 33.01
60	2592.99	81	40	25.68	25.13	28.42	30.49	< 33.01
		1	1	25.58	24.86	28.25	30.32	< 33.01
		1	160	25.70	25.34	28.53	30.60	< 33.01
		162	0	23.80	23.14	26.49	28.56	< 33.01
		1	0	20.28	19.25	22.81	24.88	< 33.01
		1	161	20.15	19.83	23.00	25.07	< 33.01
60	2659.98	81	40	25.81	25.38	28.61	30.68	< 33.01
		1	1	25.69	25.14	28.43	30.50	< 33.01
		1	160	25.63	25.21	28.44	30.51	< 33.01
		162	0	23.76	23.40	26.59	28.66	< 33.01
		1	0	20.21	19.49	22.88	24.95	< 33.01
		1	161	20.19	20.01	23.11	25.18	< 33.01
70	2531.01	90	45	25.70	25.28	28.51	30.58	< 33.01
		1	1	25.76	25.02	28.42	30.49	< 33.01
		1	187	25.51	25.25	28.39	30.46	< 33.01
		180	0	23.76	23.24	26.52	28.59	< 33.01
		1	0	20.36	19.46	22.94	25.01	< 33.01
		1	188	20.01	19.84	22.94	25.01	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM 16QAM								
70	2592.99	90	45	25.75	25.06	28.43	30.50	< 33.01
		1	1	25.61	24.86	28.26	30.33	< 33.01
		1	187	25.75	25.26	28.52	30.59	< 33.01
		180	0	23.74	23.13	26.46	28.53	< 33.01
		1	0	20.36	19.26	22.86	24.93	< 33.01
		1	188	20.33	19.83	23.10	25.17	< 33.01
70	2655	90	45	25.67	25.16	28.43	30.50	< 33.01
		1	1	25.34	24.77	28.07	30.14	< 33.01
		1	187	25.47	25.04	28.27	30.34	< 33.01
		180	0	23.67	23.21	26.46	28.53	< 33.01
		1	0	19.94	18.93	22.47	24.54	< 33.01
		1	188	19.88	19.53	22.72	24.79	< 33.01
80	2536.02	108	54	25.80	25.36	28.60	30.67	< 33.01
		1	1	25.72	25.03	28.40	30.47	< 33.01
		1	215	25.47	25.26	28.38	30.45	< 33.01
		216	0	23.90	23.37	26.65	28.72	< 33.01
		1	0	20.52	19.47	23.04	25.11	< 33.01
		1	216	20.21	20.06	23.15	25.22	< 33.01
80	2592.99	108	54	25.64	25.09	28.38	30.45	< 33.01
		1	1	25.30	24.49	27.92	29.99	< 33.01
		1	215	25.65	25.17	28.43	30.50	< 33.01
		216	0	23.62	23.21	26.43	28.50	< 33.01
		1	0	19.99	18.92	22.50	24.57	< 33.01
		1	216	19.93	19.57	22.76	24.83	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM 16QAM								
80	2649.99	108	54	25.51	25.07	28.31	30.38	< 33.01
		1	1	25.03	24.54	27.80	29.87	< 33.01
		1	215	25.38	24.98	28.19	30.26	< 33.01
		216	0	23.48	23.12	26.31	28.38	< 33.01
		1	0	19.80	18.97	22.42	24.49	< 33.01
		1	216	19.93	19.70	22.83	24.90	< 33.01
90	2541	120	60	25.57	25.12	28.36	30.43	< 33.01
		1	1	25.56	24.68	28.15	30.22	< 33.01
		1	243	25.38	25.29	28.35	30.42	< 33.01
		243	0	23.59	23.27	26.44	28.51	< 33.01
		1	0	20.07	18.86	22.52	24.59	< 33.01
		1	244	19.77	19.62	22.71	24.78	< 33.01
90	2592.99	120	60	25.72	25.04	28.40	30.47	< 33.01
		1	1	25.42	24.48	27.99	30.06	< 33.01
		1	243	25.59	25.17	28.40	30.47	< 33.01
		243	0	23.68	23.09	26.41	28.48	< 33.01
		1	0	20.30	19.17	22.78	24.85	< 33.01
		1	244	20.41	20.06	23.25	25.32	< 33.01
90	2644.98	120	60	25.61	25.07	28.36	30.43	< 33.01
		1	1	25.18	24.69	27.95	30.02	< 33.01
		1	243	25.52	25.28	28.41	30.48	< 33.01
		243	0	23.52	23.17	26.36	28.43	< 33.01
		1	0	20.11	19.06	22.63	24.70	< 33.01
		1	244	20.21	19.84	23.04	25.11	< 33.01

Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$

Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM 16QAM								
100	2546.01	135	67	25.58	25.20	28.40	30.47	< 33.01
		1	1	25.78	24.93	28.39	30.46	< 33.01
		1	271	25.42	25.37	28.41	30.48	< 33.01
		270	0	23.63	23.42	26.54	28.61	< 33.01
		1	0	20.12	18.98	22.60	24.67	< 33.01
		1	272	19.73	19.79	22.77	24.84	< 33.01
100	2592.99	135	67	25.67	25.06	28.39	30.46	< 33.01
		1	1	25.43	24.56	28.03	30.10	< 33.01
		1	271	25.74	25.26	28.52	30.59	< 33.01
		270	0	23.67	23.05	26.38	28.45	< 33.01
		1	0	20.15	18.98	22.61	24.68	< 33.01
		1	272	20.30	19.75	23.04	25.11	< 33.01
100	2640	135	67	25.66	25.09	28.39	30.46	< 33.01
		1	1	25.31	24.43	27.90	29.97	< 33.01
		1	271	25.54	25.13	28.35	30.42	< 33.01
		270	0	23.63	23.10	26.38	28.45	< 33.01
		1	0	19.99	18.64	22.38	24.45	< 33.01
		1	272	20.25	19.86	23.07	25.14	< 33.01

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM 64QAM								
10	2501.01	12	6	23.34	22.74	26.06	28.13	< 33.01
		1	1	23.46	22.73	26.12	28.19	< 33.01
		1	22	23.40	22.72	26.08	28.15	< 33.01
		24	0	22.96	22.29	25.65	27.72	< 33.01
		1	0	20.05	19.29	22.70	24.77	< 33.01
		1	23	19.99	19.37	22.70	24.77	< 33.01
10	2592.99	12	6	23.51	22.68	26.13	28.20	< 33.01
		1	1	23.39	22.67	26.06	28.13	< 33.01
		1	22	25.56	22.82	27.41	29.48	< 33.01
		24	0	23.08	22.21	25.68	27.75	< 33.01
		1	0	20.19	19.36	22.81	24.88	< 33.01
		1	23	20.22	19.39	22.84	24.91	< 33.01
10	2685.00	12	6	23.65	22.83	26.27	28.34	< 33.01
		1	1	23.57	22.82	26.22	28.29	< 33.01
		1	22	23.46	22.73	26.12	28.19	< 33.01
		24	0	23.13	22.40	25.79	27.86	< 33.01
		1	0	20.23	19.46	22.87	24.94	< 33.01
		1	23	20.23	19.50	22.89	24.96	< 33.01
15	2503.50	18	9	23.41	22.67	26.07	28.14	< 33.01
		1	1	23.35	22.47	25.94	28.01	< 33.01
		1	36	23.30	22.55	25.95	28.02	< 33.01
		36	0	22.99	22.20	25.62	27.69	< 33.01
		1	0	19.95	19.20	22.60	24.67	< 33.01
		1	37	19.93	19.24	22.61	24.68	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM 64QAM								
15	2592.99	18	9	23.45	22.65	26.08	28.15	< 33.01
		1	1	23.34	22.51	25.96	28.03	< 33.01
		1	36	23.59	22.62	26.14	28.21	< 33.01
		36	0	23.02	22.22	25.65	27.72	< 33.01
		1	0	20.19	19.33	22.79	24.86	< 33.01
		1	37	20.25	19.44	22.87	24.94	< 33.01
15	2682.48	18	9	23.49	22.71	26.13	28.20	< 33.01
		1	1	23.56	22.84	26.23	28.30	< 33.01
		1	36	23.37	22.69	26.05	28.12	< 33.01
		36	0	22.97	22.25	25.64	27.71	< 33.01
		1	0	20.05	19.16	22.64	24.71	< 33.01
		1	37	20.14	19.47	22.83	24.90	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM 64QAM								
20	2506.02	25	12	23.73	23.18	26.47	28.54	< 33.01
		1	1	23.63	22.98	26.33	28.40	< 33.01
		1	49	23.59	23.01	26.32	28.39	< 33.01
		50	0	23.27	22.63	25.97	28.04	< 33.01
		1	0	20.08	19.39	22.76	24.83	< 33.01
		1	50	20.20	19.65	22.94	25.01	< 33.01
20	2592.99	25	12	23.72	23.24	26.50	28.57	< 33.01
		1	1	23.69	23.09	26.41	28.48	< 33.01
		1	49	23.73	23.23	26.50	28.57	< 33.01
		50	0	23.27	22.69	26.00	28.07	< 33.01
		1	0	20.33	19.83	23.10	25.17	< 33.01
		1	50	20.37	20.11	23.25	25.32	< 33.01
20	2679.99	25	12	23.59	23.17	26.40	28.47	< 33.01
		1	1	23.79	23.37	26.60	28.67	< 33.01
		1	49	23.53	23.20	26.38	28.45	< 33.01
		50	0	23.18	22.81	26.01	28.08	< 33.01
		1	0	20.05	19.60	22.84	24.91	< 33.01
		1	50	20.20	20.04	23.13	25.20	< 33.01
30	2511	36	18	23.85	23.19	26.54	28.61	< 33.01
		1	1	23.73	23.18	26.47	28.54	< 33.01
		1	76	23.70	23.28	26.51	28.58	< 33.01
		75	0	23.39	22.79	26.11	28.18	< 33.01
		1	0	20.41	19.78	23.12	25.19	< 33.01
		1	77	20.22	19.84	23.04	25.11	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM 64QAM								
30	2592.99	36	18	23.83	23.22	26.55	28.62	< 33.01
		1	1	23.90	23.29	26.62	28.69	< 33.01
		1	76	23.87	23.47	26.68	28.75	< 33.01
		75	0	23.28	22.87	26.09	28.16	< 33.01
		1	0	20.54	20.02	23.30	25.37	< 33.01
		1	77	20.25	19.89	23.08	25.15	< 33.01
30	2674.98	36	18	23.68	23.19	26.45	28.52	< 33.01
		1	1	23.70	23.29	26.51	28.58	< 33.01
		1	76	23.77	23.38	26.59	28.66	< 33.01
		75	0	23.26	22.80	26.05	28.12	< 33.01
		1	0	20.30	19.58	22.97	25.04	< 33.01
		1	77	20.27	19.94	23.12	25.19	< 33.01
40	2516.01	50	25	23.84	23.38	26.63	28.70	< 33.01
		1	1	23.95	23.25	26.62	28.69	< 33.01
		1	104	23.85	23.51	26.69	28.76	< 33.01
		100	0	23.41	22.81	26.13	28.20	< 33.01
		1	0	20.50	19.73	23.14	25.21	< 33.01
		1	105	20.31	19.91	23.12	25.19	< 33.01
40	2592.99	50	25	23.79	23.22	26.52	28.59	< 33.01
		1	1	23.88	23.35	26.63	28.70	< 33.01
		1	104	24.11	23.70	26.92	28.99	< 33.01
		100	0	23.33	22.84	26.10	28.17	< 33.01
		1	0	20.25	19.58	22.94	25.01	< 33.01
		1	105	20.41	19.94	23.19	25.26	< 33.01

Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$

Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM 64QAM								
40	2670	50	25	23.39	23.06	26.24	28.31	< 33.01
		1	1	23.41	23.07	26.25	28.32	< 33.01
		1	104	23.50	23.26	26.39	28.46	< 33.01
		100	0	23.01	22.65	25.84	27.91	< 33.01
		1	0	19.97	19.49	22.75	24.82	< 33.01
		1	105	20.14	19.81	22.99	25.06	< 33.01
50	2521.02	64	32	23.66	23.27	26.48	28.55	< 33.01
		1	1	23.72	23.07	26.42	28.49	< 33.01
		1	131	23.48	23.31	26.41	28.48	< 33.01
		128	0	23.17	22.77	25.98	28.05	< 33.01
		1	0	20.30	19.48	22.92	24.99	< 33.01
		1	132	19.81	19.67	22.75	24.82	< 33.01
50	2592.99	64	32	23.68	23.08	26.40	28.47	< 33.01
		1	1	23.66	23.08	26.39	28.46	< 33.01
		1	131	23.64	23.38	26.52	28.59	< 33.01
		128	0	23.16	22.69	25.94	28.01	< 33.01
		1	0	20.52	19.66	23.12	25.19	< 33.01
		1	132	20.40	20.14	23.28	25.35	< 33.01
50	2664.99	64	32	23.49	23.18	26.35	28.42	< 33.01
		1	1	23.57	23.23	26.41	28.48	< 33.01
		1	131	23.55	23.47	26.52	28.59	< 33.01
		128	0	22.90	22.65	25.79	27.86	< 33.01
		1	0	19.95	19.30	22.65	24.72	< 33.01
		1	132	19.85	19.75	22.81	24.88	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM 64QAM								
60	2526	81	40	23.76	23.46	26.62	28.69	< 33.01
		1	1	24.04	23.11	26.61	28.68	< 33.01
		1	160	23.51	23.26	26.40	28.47	< 33.01
		162	0	23.33	22.81	26.09	28.16	< 33.01
		1	0	20.42	19.68	23.08	25.15	< 33.01
		1	161	20.10	19.89	23.01	25.08	< 33.01
60	2592.99	81	40	23.74	23.12	26.45	28.52	< 33.01
		1	1	23.73	23.14	26.46	28.53	< 33.01
		1	160	23.89	23.74	26.83	28.90	< 33.01
		162	0	23.19	22.72	25.97	28.04	< 33.01
		1	0	20.19	19.24	22.75	24.82	< 33.01
		1	161	20.36	20.14	23.26	25.33	< 33.01
60	2659.98	81	40	23.82	23.50	26.67	28.74	< 33.01
		1	1	23.73	23.25	26.51	28.58	< 33.01
		1	160	23.74	23.44	26.60	28.67	< 33.01
		162	0	23.32	23.03	26.19	28.26	< 33.01
		1	0	20.43	19.66	23.07	25.14	< 33.01
		1	161	20.42	20.21	23.33	25.40	< 33.01
70	2531.01	90	45	23.73	23.28	26.52	28.59	< 33.01
		1	1	23.96	23.16	26.59	28.66	< 33.01
		1	187	23.77	23.43	26.61	28.68	< 33.01
		180	0	23.26	22.81	26.05	28.12	< 33.01
		1	0	20.48	19.41	22.99	25.06	< 33.01
		1	188	20.30	20.13	23.23	25.30	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM 64QAM								
70	2592.99	90	45	23.74	23.15	26.47	28.54	< 33.01
		1	1	23.60	23.12	26.38	28.45	< 33.01
		1	187	23.84	23.46	26.66	28.73	< 33.01
		180	0	23.30	22.69	26.02	28.09	< 33.01
		1	0	20.59	19.40	23.05	25.12	< 33.01
		1	188	20.46	20.07	23.28	25.35	< 33.01
70	2655	90	45	23.64	23.24	26.45	28.52	< 33.01
		1	1	23.64	23.18	26.43	28.50	< 33.01
		1	187	23.59	23.20	26.41	28.48	< 33.01
		180	0	23.16	22.91	26.05	28.12	< 33.01
		1	0	20.24	19.45	22.87	24.94	< 33.01
		1	188	20.12	19.84	22.99	25.06	< 33.01
80	2536.02	108	54	23.73	23.30	26.53	28.60	< 33.01
		1	1	23.87	23.17	26.54	28.61	< 33.01
		1	215	23.61	23.40	26.52	28.59	< 33.01
		216	0	23.29	22.94	26.13	28.20	< 33.01
		1	0	20.50	19.53	23.05	25.12	< 33.01
		1	216	20.27	19.98	23.14	25.21	< 33.01
80	2592.99	108	54	23.65	23.02	26.36	28.43	< 33.01
		1	1	23.45	22.70	26.10	28.17	< 33.01
		1	215	23.62	23.24	26.44	28.51	< 33.01
		216	0	23.12	22.54	25.85	27.92	< 33.01
		1	0	20.22	19.12	22.72	24.79	< 33.01
		1	216	20.16	19.83	23.01	25.08	< 33.01

Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$

Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM 64QAM								
80	2649.99	108	54	23.56	23.09	26.34	28.41	< 33.01
		1	1	23.02	22.75	25.90	27.97	< 33.01
		1	215	23.49	23.32	26.42	28.49	< 33.01
		216	0	23.02	22.62	25.83	27.90	< 33.01
		1	0	20.13	19.30	22.75	24.82	< 33.01
		1	216	20.22	20.12	23.18	25.25	< 33.01
90	2541	120	60	23.63	23.22	26.44	28.51	< 33.01
		1	1	23.91	23.13	26.55	28.62	< 33.01
		1	243	23.62	23.53	26.59	28.66	< 33.01
		243	0	23.17	22.72	25.96	28.03	< 33.01
		1	0	20.43	19.44	22.97	25.04	< 33.01
		1	244	20.08	19.89	23.00	25.07	< 33.01
90	2592.99	120	60	23.70	23.13	26.43	28.50	< 33.01
		1	1	23.55	22.70	26.16	28.23	< 33.01
		1	243	23.75	23.22	26.50	28.57	< 33.01
		243	0	23.25	22.54	25.92	27.99	< 33.01
		1	0	20.44	19.37	22.95	25.02	< 33.01
		1	244	20.59	20.29	23.45	25.52	< 33.01
90	2644.98	120	60	23.63	23.28	26.47	28.54	< 33.01
		1	1	23.04	22.60	25.84	27.91	< 33.01
		1	243	23.54	23.13	26.35	28.42	< 33.01
		243	0	23.03	22.63	25.84	27.91	< 33.01
		1	0	19.89	18.83	22.40	24.47	< 33.01
		1	244	20.05	19.68	22.88	24.95	< 33.01

Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$

Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM 64QAM								
100	2546.01	135	67	23.57	23.24	26.42	28.49	< 33.01
		1	1	23.78	23.04	26.44	28.51	< 33.01
		1	271	23.45	23.38	26.43	28.50	< 33.01
		270	0	23.31	22.87	26.11	28.18	< 33.01
		1	0	20.30	19.22	22.80	24.87	< 33.01
		1	272	19.78	19.95	22.88	24.95	< 33.01
100	2592.99	135	67	23.67	23.09	26.40	28.47	< 33.01
		1	1	23.68	22.82	26.28	28.35	< 33.01
		1	271	23.78	23.28	26.55	28.62	< 33.01
		270	0	23.14	22.58	25.88	27.95	< 33.01
		1	0	20.14	18.96	22.60	24.67	< 33.01
		1	272	20.52	20.13	23.34	25.41	< 33.01
100	2640	135	67	23.65	23.16	26.42	28.49	< 33.01
		1	1	23.27	22.54	25.93	28.00	< 33.01
		1	271	23.79	23.47	26.64	28.71	< 33.01
		270	0	23.18	22.61	25.91	27.98	< 33.01
		1	0	20.11	18.83	22.53	24.60	< 33.01
		1	272	20.12	19.77	22.96	25.03	< 33.01

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM 256QAM								
10	2501.01	12	6	20.95	20.32	23.66	25.73	< 33.01
		1	1	20.93	20.17	23.58	25.65	< 33.01
		1	22	20.96	20.34	23.67	25.74	< 33.01
		24	0	20.87	20.18	23.55	25.62	< 33.01
		1	0	19.86	19.20	22.55	24.62	< 33.01
		1	23	19.90	19.22	22.58	24.65	< 33.01
10	2592.99	12	6	21.05	20.25	23.68	25.75	< 33.01
		1	1	21.03	20.28	23.68	25.75	< 33.01
		1	22	20.88	20.05	23.50	25.57	< 33.01
		24	0	20.99	20.12	23.59	25.66	< 33.01
		1	0	19.93	19.13	22.56	24.63	< 33.01
		1	23	19.84	19.06	22.48	24.55	< 33.01
10	2685.00	12	6	21.18	20.42	23.83	25.90	< 33.01
		1	1	21.13	20.43	23.80	25.87	< 33.01
		1	22	21.09	20.41	23.77	25.84	< 33.01
		24	0	21.08	20.32	23.73	25.80	< 33.01
		1	0	20.03	9.14	20.37	22.44	< 33.01
		1	23	20.06	19.38	22.74	24.81	< 33.01
15	2503.50	18	9	21.01	20.23	23.65	25.72	< 33.01
		1	1	21.07	20.33	23.73	25.80	< 33.01
		1	36	21.05	20.34	23.72	25.79	< 33.01
		36	0	20.89	20.19	23.56	25.63	< 33.01
		1	0	20.05	19.21	22.66	24.73	< 33.01
		1	37	19.98	19.32	22.67	24.74	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM 256QAM								
15	2592.99	18	9	21.80	20.25	24.10	26.17	< 33.01
		1	1	21.09	20.31	23.73	25.80	< 33.01
		1	36	21.06	20.27	23.69	25.76	< 33.01
		36	0	20.98	20.19	23.61	25.68	< 33.01
		1	0	20.03	19.11	22.60	24.67	< 33.01
		1	37	20.19	19.43	22.84	24.91	< 33.01
15	2682.48	18	9	20.98	20.24	23.64	25.71	< 33.01
		1	1	20.97	20.40	23.70	25.77	< 33.01
		1	36	20.91	20.30	23.63	25.70	< 33.01
		36	0	21.00	20.21	23.63	25.70	< 33.01
		1	0	19.97	19.13	22.58	24.65	< 33.01
		1	37	19.94	19.25	22.62	24.69	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM 256QAM								
20	2506.02	25	12	21.38	20.69	24.06	26.13	< 33.01
		1	1	21.31	20.56	23.96	26.03	< 33.01
		1	49	21.25	20.67	23.98	26.05	< 33.01
		50	0	21.25	20.58	23.94	26.01	< 33.01
		1	0	20.20	19.45	22.85	24.92	< 33.01
		1	50	20.31	19.78	23.06	25.13	< 33.01
20	2592.99	25	12	21.25	20.81	24.05	26.12	< 33.01
		1	1	21.06	20.52	23.81	25.88	< 33.01
		1	49	21.11	20.70	23.92	25.99	< 33.01
		50	0	21.18	20.85	24.03	26.10	< 33.01
		1	0	20.12	19.53	22.85	24.92	< 33.01
		1	50	20.13	19.68	22.92	24.99	< 33.01
20	2679.99	25	12	21.16	20.92	24.05	26.12	< 33.01
		1	1	21.24	20.93	24.10	26.17	< 33.01
		1	49	21.18	20.99	24.10	26.17	< 33.01
		50	0	21.18	20.80	24.00	26.07	< 33.01
		1	0	20.16	19.72	22.96	25.03	< 33.01
		1	50	20.15	19.93	23.05	25.12	< 33.01
30	2511	36	18	21.25	20.67	23.98	26.05	< 33.01
		1	1	21.42	20.69	24.08	26.15	< 33.01
		1	76	21.19	20.67	23.95	26.02	< 33.01
		75	0	21.36	20.75	24.08	26.15	< 33.01
		1	0	20.25	19.44	22.87	24.94	< 33.01
		1	77	20.28	19.96	23.13	25.20	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM 256QAM								
30	2592.99	36	18	21.19	20.85	24.03	26.10	< 33.01
		1	1	21.19	20.83	24.02	26.09	< 33.01
		1	76	21.25	20.92	24.10	26.17	< 33.01
		75	0	21.26	20.88	24.08	26.15	< 33.01
		1	0	20.30	19.75	23.04	25.11	< 33.01
		1	77	20.40	20.08	23.25	25.32	< 33.01
30	2674.98	36	18	21.17	20.75	23.98	26.05	< 33.01
		1	1	21.31	20.84	24.09	26.16	< 33.01
		1	76	21.16	20.89	24.04	26.11	< 33.01
		75	0	21.27	20.81	24.06	26.13	< 33.01
		1	0	20.20	19.58	22.91	24.98	< 33.01
		1	77	20.34	20.10	23.23	25.30	< 33.01
40	2516.01	50	25	21.33	20.72	24.05	26.12	< 33.01
		1	1	21.53	20.91	24.24	26.31	< 33.01
		1	104	21.45	21.07	24.27	26.34	< 33.01
		100	0	21.39	20.87	24.15	26.22	< 33.01
		1	0	20.44	19.73	23.11	25.18	< 33.01
		1	105	20.40	19.94	23.19	25.26	< 33.01
40	2592.99	50	25	21.25	20.90	24.09	26.16	< 33.01
		1	1	21.37	20.94	24.17	26.24	< 33.01
		1	104	21.34	20.97	24.17	26.24	< 33.01
		100	0	21.35	21.00	24.19	26.26	< 33.01
		1	0	20.38	19.66	23.05	25.12	< 33.01
		1	105	20.61	20.22	23.43	25.50	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM 256QAM								
40	2670	50	25	20.89	20.55	23.73	25.80	< 33.01
		1	1	21.03	20.61	23.84	25.91	< 33.01
		1	104	21.09	20.89	24.00	26.07	< 33.01
		100	0	20.95	20.71	23.84	25.91	< 33.01
		1	0	20.12	19.67	22.91	24.98	< 33.01
		1	105	19.94	19.82	22.89	24.96	< 33.01
50	2521.02	64	32	21.18	20.66	23.94	26.01	< 33.01
		1	1	21.26	20.65	23.98	26.05	< 33.01
		1	131	20.96	20.84	23.91	25.98	< 33.01
		128	0	21.18	20.69	23.95	26.02	< 33.01
		1	0	20.45	19.61	23.06	25.13	< 33.01
		1	132	19.83	19.70	22.78	24.85	< 33.01
50	2592.99	64	32	21.20	20.63	23.93	26.00	< 33.01
		1	1	21.09	20.52	23.82	25.89	< 33.01
		1	131	21.11	20.90	24.02	26.09	< 33.01
		128	0	21.23	20.63	23.95	26.02	< 33.01
		1	0	20.19	19.41	22.83	24.90	< 33.01
		1	132	20.11	19.87	23.00	25.07	< 33.01
50	2664.99	64	32	20.93	20.73	23.84	25.91	< 33.01
		1	1	20.98	20.76	23.88	25.95	< 33.01
		1	131	20.98	20.84	23.92	25.99	< 33.01
		128	0	20.94	20.71	23.84	25.91	< 33.01
		1	0	20.13	19.72	22.94	25.01	< 33.01
		1	132	20.03	19.92	22.99	25.06	< 33.01

Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$

Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM 256QAM								
60	2526	81	40	21.28	20.87	24.09	26.16	< 33.01
		1	1	21.53	20.74	24.16	26.23	< 33.01
		1	160	21.16	20.99	24.09	26.16	< 33.01
		162	0	21.28	20.89	24.10	26.17	< 33.01
		1	0	20.45	19.68	23.09	25.16	< 33.01
		1	161	20.04	19.93	23.00	25.07	< 33.01
60	2592.99	81	40	21.22	20.59	23.93	26.00	< 33.01
		1	1	21.18	20.63	23.92	25.99	< 33.01
		1	160	21.13	20.80	23.98	26.05	< 33.01
		162	0	21.25	20.72	24.00	26.07	< 33.01
		1	0	20.39	19.51	22.98	25.05	< 33.01
		1	161	20.18	19.82	23.01	25.08	< 33.01
60	2659.98	81	40	21.30	20.88	24.11	26.18	< 33.01
		1	1	21.25	20.68	23.98	26.05	< 33.01
		1	160	21.28	20.99	24.15	26.22	< 33.01
		162	0	21.28	21.01	24.16	26.23	< 33.01
		1	0	20.32	19.52	22.95	25.02	< 33.01
		1	161	20.15	19.89	23.03	25.10	< 33.01
70	2531.01	90	45	21.20	20.73	23.98	26.05	< 33.01
		1	1	21.19	20.42	23.83	25.90	< 33.01
		1	187	20.92	20.59	23.77	25.84	< 33.01
		180	0	21.31	20.78	24.06	26.13	< 33.01
		1	0	20.48	19.46	23.01	25.08	< 33.01
		1	188	20.12	19.82	22.98	25.05	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM 256QAM								
70	2592.99	90	45	21.29	20.66	24.00	26.07	< 33.01
		1	1	21.29	20.54	23.94	26.01	< 33.01
		1	187	21.11	20.70	23.92	25.99	< 33.01
		180	0	21.27	20.62	23.97	26.04	< 33.01
		1	0	20.31	19.31	22.85	24.92	< 33.01
		1	188	20.26	19.83	23.06	25.13	< 33.01
70	2655	90	45	21.19	20.81	24.01	26.08	< 33.01
		1	1	20.98	20.52	23.77	25.84	< 33.01
		1	187	21.12	20.68	23.92	25.99	< 33.01
		180	0	21.15	20.73	23.96	26.03	< 33.01
		1	0	20.17	19.36	22.79	24.86	< 33.01
		1	188	20.10	19.76	22.94	25.01	< 33.01
80	2536.02	108	54	21.09	20.62	23.87	25.94	< 33.01
		1	1	21.28	20.61	23.97	26.04	< 33.01
		1	215	20.96	20.72	23.85	25.92	< 33.01
		216	0	21.25	20.63	23.96	26.03	< 33.01
		1	0	20.19	19.28	22.77	24.84	< 33.01
		1	216	20.06	19.86	22.97	25.04	< 33.01
80	2592.99	108	54	21.06	20.54	23.82	25.89	< 33.01
		1	1	21.03	20.26	23.67	25.74	< 33.01
		1	215	21.06	20.67	23.88	25.95	< 33.01
		216	0	21.08	20.47	23.80	25.87	< 33.01
		1	0	20.14	19.08	22.65	24.72	< 33.01
		1	216	20.12	19.82	22.98	25.05	< 33.01

Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$

Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM 256QAM								
80	2649.99	108	54	21.07	20.69	23.89	25.96	< 33.01
		1	1	20.59	20.12	23.37	25.44	< 33.01
		1	215	21.10	20.84	23.98	26.05	< 33.01
		216	0	20.95	20.73	23.85	25.92	< 33.01
		1	0	19.81	19.00	22.43	24.50	< 33.01
		1	216	19.89	19.68	22.80	24.87	< 33.01
90	2541	120	60	21.08	20.67	23.89	25.96	< 33.01
		1	1	21.37	20.64	24.03	26.10	< 33.01
		1	243	21.12	21.03	24.09	26.16	< 33.01
		243	0	21.09	20.76	23.94	26.01	< 33.01
		1	0	20.29	19.26	22.82	24.89	< 33.01
		1	244	19.98	19.99	23.00	25.07	< 33.01
90	2592.99	120	60	21.20	20.57	23.91	25.98	< 33.01
		1	1	20.99	20.08	23.57	25.64	< 33.01
		1	243	21.16	20.84	24.01	26.08	< 33.01
		243	0	21.16	20.72	23.96	26.03	< 33.01
		1	0	20.26	19.19	22.77	24.84	< 33.01
		1	244	20.28	19.94	23.12	25.19	< 33.01
90	2644.98	120	60	21.13	20.63	23.90	25.97	< 33.01
		1	1	20.50	19.95	23.24	25.31	< 33.01
		1	243	20.91	20.51	23.72	25.79	< 33.01
		243	0	21.09	20.57	23.85	25.92	< 33.01
		1	0	20.00	19.03	22.55	24.62	< 33.01
		1	244	20.10	19.85	22.99	25.06	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
DFT-s-OFDM 256QAM								
100	2546.01	135	67	21.17	20.76	23.98	26.05	< 33.01
		1	1	21.28	20.52	23.93	26.00	< 33.01
		1	271	21.00	21.14	24.08	26.15	< 33.01
		270	0	21.14	20.77	23.97	26.04	< 33.01
		1	0	20.18	19.02	22.65	24.72	< 33.01
		1	272	19.86	19.98	22.93	25.00	< 33.01
100	2592.99	135	67	21.18	20.65	23.93	26.00	< 33.01
		1	1	20.89	20.17	23.56	25.63	< 33.01
		1	271	21.27	20.78	24.04	26.11	< 33.01
		270	0	21.16	20.56	23.88	25.95	< 33.01
		1	0	20.35	19.16	22.81	24.88	< 33.01
		1	272	20.42	20.06	23.25	25.32	< 33.01
100	2640	135	67	21.21	20.74	23.99	26.06	< 33.01
		1	1	20.94	20.12	23.56	25.63	< 33.01
		1	271	21.41	20.98	24.21	26.28	< 33.01
		270	0	21.12	20.58	23.87	25.94	< 33.01
		1	0	20.35	18.98	22.73	24.80	< 33.01
		1	272	20.37	20.04	23.22	25.29	< 33.01

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
CP OFDM QPSK								
10	2501.01	12	6	25.03	24.10	27.60	29.67	< 33.01
		1	1	25.05	24.01	27.57	29.64	< 33.01
		1	22	25.10	24.36	27.76	29.83	< 33.01
		24	0	22.53	21.84	25.21	27.28	< 33.01
		1	0	20.08	19.29	22.71	24.78	< 33.01
		1	23	20.06	19.39	22.75	24.82	< 33.01
10	2592.99	12	6	25.12	24.25	27.72	29.79	< 33.01
		1	1	25.06	24.09	27.61	29.68	< 33.01
		1	22	25.21	24.27	27.78	29.85	< 33.01
		24	0	22.57	21.76	25.19	27.26	< 33.01
		1	0	20.09	19.28	22.71	24.78	< 33.01
		1	23	20.08	19.28	22.71	24.78	< 33.01
10	2685.00	12	6	25.18	24.50	27.86	29.93	< 33.01
		1	1	25.30	24.23	27.81	29.88	< 33.01
		1	22	25.16	24.42	27.82	29.89	< 33.01
		24	0	22.64	21.82	25.26	27.33	< 33.01
		1	0	20.24	19.43	22.86	24.93	< 33.01
		1	23	20.16	19.42	22.82	24.89	< 33.01
15	2503.50	19	9	24.98	24.05	27.55	29.62	< 33.01
		1	1	24.90	23.70	27.35	29.42	< 33.01
		1	36	25.19	24.20	27.73	29.80	< 33.01
		38	0	22.51	21.71	25.14	27.21	< 33.01
		1	0	20.14	19.32	22.76	24.83	< 33.01
		1	37	20.09	19.38	22.76	24.83	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
CP OFDM QPSK								
15	2592.99	19	9	24.98	24.15	27.60	29.67	< 33.01
		1	1	24.92	23.95	27.47	29.54	< 33.01
		1	36	25.24	24.41	27.86	29.93	< 33.01
		38	0	22.62	21.66	25.18	27.25	< 33.01
		1	0	20.08	19.09	22.62	24.69	< 33.01
		1	37	20.22	19.32	22.80	24.87	< 33.01
15	2682.48	19	9	25.03	24.22	27.65	29.72	< 33.01
		1	1	25.14	24.18	27.70	29.77	< 33.01
		1	36	25.03	24.38	27.73	29.80	< 33.01
		38	0	22.44	21.79	25.14	27.21	< 33.01
		1	0	20.32	19.39	22.89	24.96	< 33.01
		1	37	20.19	19.42	22.83	24.90	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
CP OFDM QPSK								
20	2506.02	25	12	25.27	24.67	27.99	30.06	< 33.01
		1	1	25.18	24.53	27.88	29.95	< 33.01
		1	49	25.14	24.54	27.86	29.93	< 33.01
		51	0	22.78	22.18	25.50	27.57	< 33.01
		1	0	20.19	19.49	22.86	24.93	< 33.01
		1	50	20.26	19.74	23.02	25.09	< 33.01
20	2592.99	25	12	25.13	24.68	27.92	29.99	< 33.01
		1	1	25.21	24.60	27.93	30.00	< 33.01
		1	49	25.26	24.74	28.02	30.09	< 33.01
		51	0	22.65	22.24	25.46	27.53	< 33.01
		1	0	20.41	19.84	23.14	25.21	< 33.01
		1	50	20.34	20.04	23.20	25.27	< 33.01
20	2679.99	25	12	25.14	24.64	27.91	29.98	< 33.01
		1	1	25.22	24.76	28.01	30.08	< 33.01
		1	49	25.18	24.93	28.07	30.14	< 33.01
		51	0	22.71	22.26	25.50	27.57	< 33.01
		1	0	20.22	19.82	23.03	25.10	< 33.01
		1	50	20.32	20.13	23.24	25.31	< 33.01
30	2511	39	19	25.28	24.57	27.95	30.02	< 33.01
		1	1	25.44	24.63	28.06	30.13	< 33.01
		1	76	25.48	24.73	28.13	30.20	< 33.01
		78	0	22.81	22.26	25.55	27.62	< 33.01
		1	0	20.47	19.72	23.12	25.19	< 33.01
		1	77	20.41	19.96	23.20	25.27	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
CP OFDM QPSK								
30	2592.99	39	19	25.19	24.65	27.94	30.01	< 33.01
		1	1	25.36	24.76	28.08	30.15	< 33.01
		1	76	25.43	25.19	28.32	30.39	< 33.01
		78	0	22.73	22.27	25.52	27.59	< 33.01
		1	0	20.29	19.96	23.14	25.21	< 33.01
		1	77	20.47	20.30	23.40	25.47	< 33.01
30	2674.98	39	19	25.23	24.67	27.97	30.04	< 33.01
		1	1	25.24	24.64	27.96	30.03	< 33.01
		1	76	25.30	25.27	28.30	30.37	< 33.01
		78	0	22.79	22.25	25.54	27.61	< 33.01
		1	0	20.35	19.78	23.08	25.15	< 33.01
		1	77	20.34	20.03	23.20	25.27	< 33.01
40	2516.01	53	26	25.24	24.74	28.01	30.08	< 33.01
		1	1	25.31	24.58	27.97	30.04	< 33.01
		1	104	25.23	24.79	28.03	30.10	< 33.01
		106	0	22.83	22.30	25.58	27.65	< 33.01
		1	0	20.50	19.79	23.17	25.24	< 33.01
		1	105	20.52	20.21	23.38	25.45	< 33.01
40	2592.99	53	26	24.91	24.53	27.73	29.80	< 33.01
		1	1	25.10	24.68	27.91	29.98	< 33.01
		1	104	25.03	24.65	27.85	29.92	< 33.01
		106	0	22.52	22.04	25.30	27.37	< 33.01
		1	0	20.30	19.80	23.07	25.14	< 33.01
		1	105	20.24	19.99	23.13	25.20	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
CP OFDM QPSK								
40	2670	53	26	24.84	24.54	27.70	29.77	< 33.01
		1	1	25.04	24.57	27.82	29.89	< 33.01
		1	104	25.05	24.72	27.90	29.97	< 33.01
		106	0	22.41	22.13	25.28	27.35	< 33.01
		1	0	19.99	19.62	22.82	24.89	< 33.01
		1	105	20.15	19.86	23.02	25.09	< 33.01
50	2521.02	67	33	25.07	24.73	27.91	29.98	< 33.01
		1	1	25.28	24.54	27.94	30.01	< 33.01
		1	131	25.10	24.84	27.98	30.05	< 33.01
		133	0	22.68	22.23	25.47	27.54	< 33.01
		1	0	20.37	19.81	23.11	25.18	< 33.01
		1	132	20.01	19.84	22.94	25.01	< 33.01
50	2592.99	67	33	25.13	24.48	27.83	29.90	< 33.01
		1	1	24.84	24.32	27.60	29.67	< 33.01
		1	131	25.01	24.73	27.88	29.95	< 33.01
		133	0	22.59	22.02	25.32	27.39	< 33.01
		1	0	20.35	19.55	22.98	25.05	< 33.01
		1	132	20.25	19.94	23.11	25.18	< 33.01
50	2664.99	67	33	24.91	24.55	27.74	29.81	< 33.01
		1	1	25.01	24.59	27.82	29.89	< 33.01
		1	131	25.02	24.76	27.90	29.97	< 33.01
		133	0	22.48	22.18	25.34	27.41	< 33.01
		1	0	20.23	19.68	22.97	25.04	< 33.01
		1	132	20.08	19.84	22.97	25.04	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
CP OFDM QPSK								
60	2526	81	40	25.24	24.82	28.05	30.12	< 33.01
		1	1	25.42	24.58	28.03	30.10	< 33.01
		1	160	25.14	24.92	28.04	30.11	< 33.01
		162	0	22.78	22.32	25.57	27.64	< 33.01
		1	0	20.53	19.65	23.12	25.19	< 33.01
		1	161	20.22	20.02	23.13	25.20	< 33.01
60	2592.99	81	40	25.27	24.59	27.95	30.02	< 33.01
		1	1	25.25	24.63	27.96	30.03	< 33.01
		1	160	25.34	24.96	28.16	30.23	< 33.01
		162	0	22.82	22.17	25.52	27.59	< 33.01
		1	0	20.60	19.56	23.12	25.19	< 33.01
		1	161	20.42	19.97	23.21	25.28	< 33.01
60	2659.98	81	40	25.16	24.71	27.95	30.02	< 33.01
		1	1	25.05	24.79	27.93	30.00	< 33.01
		1	160	25.12	24.85	28.00	30.07	< 33.01
		162	0	22.68	22.30	25.50	27.57	< 33.01
		1	0	20.29	19.52	22.93	25.00	< 33.01
		1	161	20.25	19.97	23.12	25.19	< 33.01
70	2531.01	95	47	25.26	24.74	28.02	30.09	< 33.01
		1	1	25.30	24.46	27.91	29.98	< 33.01
		1	187	25.46	24.93	28.21	30.28	< 33.01
		189	0	22.73	22.33	25.54	27.61	< 33.01
		1	0	20.53	19.86	23.22	25.29	< 33.01
		1	188	20.17	19.86	23.03	25.10	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
CP OFDM QPSK								
70	2592.99	95	47	25.17	24.56	27.89	29.96	< 33.01
		1	1	25.21	24.51	27.88	29.95	< 33.01
		1	187	25.28	25.25	28.28	30.35	< 33.01
		189	0	22.71	22.16	25.45	27.52	< 33.01
		1	0	20.36	19.51	22.97	25.04	< 33.01
		1	188	20.38	19.83	23.12	25.19	< 33.01
70	2655	95	47	25.29	24.67	28.00	30.07	< 33.01
		1	1	25.19	24.45	27.85	29.92	< 33.01
		1	187	25.32	25.09	28.22	30.29	< 33.01
		189	0	22.73	22.20	25.48	27.55	< 33.01
		1	0	20.32	19.73	23.05	25.12	< 33.01
		1	188	20.31	19.89	23.12	25.19	< 33.01
80	2536.02	109	54	25.28	24.87	28.09	30.16	< 33.01
		1	1	25.39	24.65	28.05	30.12	< 33.01
		1	215	25.32	25.19	28.27	30.34	< 33.01
		217	0	22.75	22.37	25.57	27.64	< 33.01
		1	0	20.68	19.62	23.19	25.26	< 33.01
		1	216	20.35	20.17	23.27	25.34	< 33.01
80	2592.99	109	54	25.10	24.47	27.81	29.88	< 33.01
		1	1	25.07	24.13	27.64	29.71	< 33.01
		1	215	25.36	24.95	28.17	30.24	< 33.01
		217	0	22.65	22.05	25.37	27.44	< 33.01
		1	0	20.23	19.24	22.77	24.84	< 33.01
		1	216	20.28	19.91	23.11	25.18	< 33.01

Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$

Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
CP OFDM QPSK								
80	2649.99	109	54	24.99	24.51	27.77	29.84	< 33.01
		1	1	24.73	24.25	27.51	29.58	< 33.01
		1	215	25.17	24.79	28.00	30.07	< 33.01
		217	0	22.51	22.09	25.32	27.39	< 33.01
		1	0	20.04	19.22	22.66	24.73	< 33.01
		1	216	20.18	19.88	23.04	25.11	< 33.01
90	2541	123	61	25.04	24.61	27.84	29.91	< 33.01
		1	1	25.32	24.56	27.97	30.04	< 33.01
		1	243	24.95	24.67	27.82	29.89	< 33.01
		245	0	22.60	22.18	25.41	27.48	< 33.01
		1	0	20.40	19.37	22.93	25.00	< 33.01
		1	244	20.00	19.89	22.96	25.03	< 33.01
90	2592.99	123	61	25.18	24.50	27.86	29.93	< 33.01
		1	1	25.09	24.25	27.70	29.77	< 33.01
		1	243	25.34	24.98	28.17	30.24	< 33.01
		245	0	22.63	22.12	25.39	27.46	< 33.01
		1	0	20.28	19.22	22.79	24.86	< 33.01
		1	244	20.53	20.09	23.33	25.40	< 33.01
90	2644.98	123	61	25.03	24.61	27.84	29.91	< 33.01
		1	1	24.74	24.11	27.45	29.52	< 33.01
		1	243	25.07	24.74	27.92	29.99	< 33.01
		245	0	22.54	22.17	25.37	27.44	< 33.01
		1	0	20.13	19.09	22.65	24.72	< 33.01
		1	244	20.29	19.86	23.09	25.16	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
CP OFDM QPSK								
100	2546.01	137	68	25.07	24.70	27.90	29.97	< 33.01
		1	1	25.40	24.65	28.05	30.12	< 33.01
		1	271	24.96	24.86	27.92	29.99	< 33.01
		273	0	22.67	22.21	25.46	27.53	< 33.01
		1	0	20.45	19.41	22.97	25.04	< 33.01
		1	272	20.12	20.14	23.14	25.21	< 33.01
100	2592.99	137	68	25.14	24.48	27.83	29.90	< 33.01
		1	1	25.12	24.16	27.68	29.75	< 33.01
		1	271	25.52	24.85	28.21	30.28	< 33.01
		273	0	22.71	22.12	25.44	27.51	< 33.01
		1	0	20.40	19.28	22.89	24.96	< 33.01
		1	272	20.50	19.96	23.25	25.32	< 33.01
100	2640	137	68	25.17	24.57	27.89	29.96	< 33.01
		1	1	25.00	24.24	27.65	29.72	< 33.01
		1	271	25.27	24.86	28.08	30.15	< 33.01
		273	0	22.63	22.13	25.40	27.47	< 33.01
		1	0	20.39	19.08	22.79	24.86	< 33.01
		1	272	20.42	19.96	23.21	25.28	< 33.01

Test Site	WZ-SR6	Test Engineer	Cloud Guo
Test Date	2023/04/03 ~ 2023/04/08 2023/05/10 ~ 2023/05/12	Test Band	n77/n78_UL MIMO (3450 ~ 3550MHz)

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM PI/2 BPSK								
10	3455.01	12	6	25.43	24.63	28.06	28.64	< 30.00
		1	1	25.36	24.62	28.02	28.60	< 30.00
		1	22	25.32	24.57	27.97	28.55	< 30.00
		24	0	23.97	23.24	26.63	27.21	< 30.00
		1	0	19.54	18.86	22.22	22.80	< 30.00
		1	23	19.53	18.88	22.23	22.81	< 30.00
10	3500.01	12	6	25.44	24.68	28.09	28.67	< 30.00
		1	1	24.39	24.89	27.66	28.24	< 30.00
		1	22	25.42	24.68	28.08	28.66	< 30.00
		24	0	24.01	23.24	26.65	27.23	< 30.00
		1	0	19.57	18.84	22.23	22.81	< 30.00
		1	23	19.45	18.73	22.12	22.70	< 30.00
10	3544.98	12	6	25.47	24.76	28.14	28.72	< 30.00
		1	1	25.46	24.64	28.08	28.66	< 30.00
		1	22	25.32	24.60	27.99	28.57	< 30.00
		24	0	23.89	23.22	26.58	27.16	< 30.00
		1	0	19.52	18.75	22.16	22.74	< 30.00
		1	23	19.52	18.73	22.15	22.73	< 30.00
15	3457.50	18	9	25.73	24.91	28.35	28.93	< 30.00
		1	1	25.72	24.91	28.34	28.92	< 30.00
		1	36	25.76	24.90	28.36	28.94	< 30.00
		36	0	24.25	23.45	26.88	27.46	< 30.00
		1	0	19.78	19.03	22.43	23.01	< 30.00
		1	37	19.84	19.06	22.48	23.06	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{\text{Port 0 Output Power} / 10} + 10^{\text{Port 1 Output Power} / 10}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM PI/2 BPSK								
15	3500.01	18	9	25.70	24.97	28.36	28.94	< 30.00
		1	1	25.72	24.94	28.36	28.94	< 30.00
		1	36	25.65	24.92	28.31	28.89	< 30.00
		36	0	24.27	23.46	26.89	27.47	< 30.00
		1	0	19.86	19.04	22.48	23.06	< 30.00
		1	37	19.80	19.01	22.43	23.01	< 30.00
15	3542.49	18	9	25.72	24.91	28.34	28.92	< 30.00
		1	1	25.72	24.89	28.34	28.92	< 30.00
		1	36	25.73	24.83	28.31	28.89	< 30.00
		36	0	24.27	23.46	26.89	27.47	< 30.00
		1	0	19.85	19.10	22.50	23.08	< 30.00
		1	37	19.85	18.90	22.41	22.99	< 30.00
20	3460.02	25	12	25.93	25.07	28.53	29.11	< 30.00
		1	1	25.84	25.06	28.48	29.06	< 30.00
		1	49	25.90	25.02	28.49	29.07	< 30.00
		50	0	24.48	23.62	27.08	27.66	< 30.00
		1	0	19.96	19.15	22.58	23.16	< 30.00
		1	50	20.01	19.13	22.60	23.18	< 30.00
20	3500.01	25	12	25.83	25.11	28.50	29.08	< 30.00
		1	1	25.84	25.13	28.51	29.09	< 30.00
		1	49	25.74	25.05	28.42	29.00	< 30.00
		50	0	23.90	23.18	26.57	27.15	< 30.00
		1	0	19.52	18.71	22.14	22.72	< 30.00
		1	50	19.32	18.57	21.97	22.55	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM PI/2 BPSK								
20	3540.00	25	12	25.87	25.08	28.50	29.08	< 30.00
		1	1	25.83	25.09	28.49	29.07	< 30.00
		1	49	25.83	24.99	28.44	29.02	< 30.00
		50	0	24.41	23.64	27.05	27.63	< 30.00
		1	0	20.04	19.19	22.65	23.23	< 30.00
		1	50	19.88	19.09	22.51	23.09	< 30.00
25	3462.51	32	16	25.92	25.24	28.60	29.18	< 30.00
		1	1	25.84	25.26	28.57	29.15	< 30.00
		1	63	25.86	25.12	28.52	29.10	< 30.00
		64	0	24.39	23.70	27.07	27.65	< 30.00
		1	0	19.95	19.31	22.65	23.23	< 30.00
		1	64	19.97	19.17	22.60	23.18	< 30.00
25	3500.01	32	16	25.85	25.09	28.50	29.08	< 30.00
		1	1	25.93	25.13	28.56	29.14	< 30.00
		1	63	25.75	25.11	28.45	29.03	< 30.00
		64	0	24.34	23.62	27.01	27.59	< 30.00
		1	0	19.99	19.24	22.64	23.22	< 30.00
		1	64	19.83	19.14	22.51	23.09	< 30.00
25	3537.48	32	16	25.88	25.10	28.52	29.10	< 30.00
		1	1	25.91	25.13	28.55	29.13	< 30.00
		1	63	25.85	25.03	28.47	29.05	< 30.00
		64	0	24.32	23.71	27.04	27.62	< 30.00
		1	0	19.93	19.32	22.65	23.23	< 30.00
		1	64	19.74	19.19	22.48	23.06	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM PI/2 BPSK								
30	3465.00	36	18	25.91	25.17	28.57	29.15	< 30.00
		1	1	25.89	25.13	28.54	29.12	< 30.00
		1	76	25.82	25.13	28.50	29.08	< 30.00
		75	0	24.55	23.79	27.20	27.78	< 30.00
		1	0	20.09	19.39	22.76	23.34	< 30.00
		1	77	20.06	19.28	22.70	23.28	< 30.00
30	3500.01	36	18	25.88	25.19	28.56	29.14	< 30.00
		1	1	26.05	25.21	28.66	29.24	< 30.00
		1	76	25.82	25.13	28.50	29.08	< 30.00
		75	0	24.49	23.72	27.13	27.71	< 30.00
		1	0	20.16	19.30	22.76	23.34	< 30.00
		1	77	19.90	19.31	22.63	23.21	< 30.00
30	3534.99	36	18	25.82	25.08	28.48	29.06	< 30.00
		1	1	25.86	25.24	28.57	29.15	< 30.00
		1	76	25.77	25.06	28.44	29.02	< 30.00
		75	0	24.44	23.74	27.11	27.69	< 30.00
		1	0	19.86	19.43	22.66	23.24	< 30.00
		1	77	19.95	19.25	22.62	23.20	< 30.00

Note 1: Total Power (dBm) = $10 \cdot \log\{10^{\text{Port 0 Output Power} / 10} + 10^{\text{Port 1 Output Power} / 10}\}$

Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM PI/2 BPSK								
40	3470.01	50	25	25.98	25.24	28.64	29.22	< 30.00
		1	1	25.92	25.28	28.62	29.20	< 30.00
		1	104	25.87	25.26	28.59	29.17	< 30.00
		100	0	24.53	23.83	27.20	27.78	< 30.00
		1	0	20.05	19.54	22.81	23.39	< 30.00
		1	105	20.01	19.38	22.72	23.30	< 30.00
40	3500.01	50	25	25.92	25.20	28.59	29.17	< 30.00
		1	1	26.07	25.18	28.66	29.24	< 30.00
		1	104	25.83	25.11	28.50	29.08	< 30.00
		100	0	24.50	23.84	27.19	27.77	< 30.00
		1	0	20.23	19.53	22.90	23.48	< 30.00
		1	105	20.05	19.32	22.71	23.29	< 30.00
40	3529.98	50	25	25.84	25.14	28.51	29.09	< 30.00
		1	1	25.93	25.24	28.61	29.19	< 30.00
		1	104	25.83	25.14	28.51	29.09	< 30.00
		100	0	24.43	23.73	27.10	27.68	< 30.00
		1	0	20.09	19.48	22.81	23.39	< 30.00
		1	105	19.99	19.26	22.65	23.23	< 30.00
50	3475.02	64	32	25.78	25.04	28.44	29.02	< 30.00
		1	1	25.78	25.10	28.46	29.04	< 30.00
		1	131	25.52	24.79	28.18	28.76	< 30.00
		128	0	24.30	23.56	26.96	27.54	< 30.00
		1	0	19.90	19.23	22.59	23.17	< 30.00
		1	132	19.56	18.88	22.24	22.82	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM PI/2 BPSK								
50	3500.01	64	32	25.81	24.94	28.41	28.99	< 30.00
		1	1	25.97	25.15	28.59	29.17	< 30.00
		1	131	25.53	24.72	28.15	28.73	< 30.00
		128	0	24.31	23.46	26.92	27.50	< 30.00
		1	0	20.12	19.21	22.70	23.28	< 30.00
		1	132	19.64	18.87	22.28	22.86	< 30.00
50	3525.00	64	32	25.75	24.88	28.35	28.93	< 30.00
		1	1	25.77	24.91	28.37	28.95	< 30.00
		1	131	25.51	24.62	28.10	28.68	< 30.00
		128	0	24.28	23.45	26.90	27.48	< 30.00
		1	0	19.98	19.18	22.61	23.19	< 30.00
		1	132	19.70	18.85	22.31	22.89	< 30.00
60	3480.00	81	40	25.70	24.73	28.25	28.83	< 30.00
		1	1	25.69	24.79	28.27	28.85	< 30.00
		1	160	25.29	24.51	27.93	28.51	< 30.00
		162	0	24.08	23.29	26.71	27.29	< 30.00
		1	0	19.65	18.93	22.32	22.90	< 30.00
		1	161	19.46	18.75	22.13	22.71	< 30.00
60	3500.01	81	40	25.64	24.81	28.26	28.84	< 30.00
		1	1	25.84	24.90	28.41	28.99	< 30.00
		1	160	25.40	24.60	28.03	28.61	< 30.00
		162	0	24.17	23.29	26.76	27.34	< 30.00
		1	0	19.86	18.96	22.44	23.02	< 30.00
		1	161	19.47	18.71	22.12	22.70	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM PI/2 BPSK								
60	3519.99	81	40	25.68	24.79	28.27	28.85	< 30.00
		1	1	25.80	24.79	28.33	28.91	< 30.00
		1	160	25.42	24.47	27.98	28.56	< 30.00
		162	0	24.14	23.27	26.74	27.32	< 30.00
		1	0	19.85	18.79	22.36	22.94	< 30.00
		1	161	19.46	18.59	22.06	22.64	< 30.00
70	3485.01	90	45	25.52	24.63	28.11	28.69	< 30.00
		1	1	25.67	24.85	28.29	28.87	< 30.00
		1	187	25.29	24.55	27.95	28.53	< 30.00
		180	0	24.10	23.27	26.72	27.30	< 30.00
		1	0	19.68	19.14	22.43	23.01	< 30.00
		1	188	19.24	18.53	21.91	22.49	< 30.00
70	3500.01	90	45	25.56	24.71	28.17	28.75	< 30.00
		1	1	25.73	24.86	28.33	28.91	< 30.00
		1	187	25.28	24.49	27.91	28.49	< 30.00
		180	0	24.07	23.27	26.70	27.28	< 30.00
		1	0	19.77	19.04	22.43	23.01	< 30.00
		1	188	19.23	18.55	21.91	22.49	< 30.00
70	3514.98	90	45	25.53	24.69	28.14	28.72	< 30.00
		1	1	25.71	24.84	28.31	28.89	< 30.00
		1	187	25.23	24.40	27.85	28.43	< 30.00
		180	0	24.05	23.23	26.67	27.25	< 30.00
		1	0	19.78	18.96	22.40	22.98	< 30.00
		1	188	19.36	18.51	21.97	22.55	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM PI/2 BPSK								
80	3490.02	108	54	25.66	24.72	28.23	28.81	< 30.00
		1	1	25.64	24.77	28.24	28.82	< 30.00
		1	215	25.31	24.52	27.94	28.52	< 30.00
		216	0	24.01	23.29	26.68	27.26	< 30.00
		1	0	19.67	19.09	22.40	22.98	< 30.00
		1	216	19.36	18.58	22.00	22.58	< 30.00
80	3500.01	108	54	25.58	24.78	28.21	28.79	< 30.00
		1	1	25.74	24.90	28.35	28.93	< 30.00
		1	215	25.32	24.50	27.94	28.52	< 30.00
		216	0	24.15	23.27	26.74	27.32	< 30.00
		1	0	19.82	19.02	22.45	23.03	< 30.00
		1	216	19.33	18.60	21.99	22.57	< 30.00
80	3510.00	108	54	25.57	24.74	28.19	28.77	< 30.00
		1	1	25.76	24.75	28.29	28.87	< 30.00
		1	215	25.32	24.50	27.94	28.52	< 30.00
		216	0	24.06	23.25	26.68	27.26	< 30.00
		1	0	19.88	18.87	22.41	22.99	< 30.00
		1	216	19.27	18.51	21.92	22.50	< 30.00
90	3495.00	120	60	25.58	24.75	28.20	28.78	< 30.00
		1	1	25.67	24.73	28.24	28.82	< 30.00
		1	243	25.34	24.54	27.97	28.55	< 30.00
		243	0	24.09	23.31	26.73	27.31	< 30.00
		1	0	19.64	19.05	22.37	22.95	< 30.00
		1	244	19.37	18.64	22.03	22.61	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM PI/2 BPSK								
90	3500.01	120	60	25.57	24.88	28.25	28.83	< 30.00
		1	1	25.69	24.91	28.33	28.91	< 30.00
		1	243	25.41	24.58	28.03	28.61	< 30.00
		243	0	24.12	23.36	26.77	27.35	< 30.00
		1	0	19.74	19.02	22.41	22.99	< 30.00
		1	244	19.30	18.73	22.03	22.61	< 30.00
90	3504.99	120	60	25.61	24.84	28.25	28.83	< 30.00
		1	1	25.85	24.97	28.44	29.02	< 30.00
		1	243	25.41	24.55	28.01	28.59	< 30.00
		243	0	24.18	23.32	26.78	27.36	< 30.00
		1	0	19.94	19.07	22.54	23.12	< 30.00
		1	244	19.44	18.69	22.09	22.67	< 30.00
100	3500.01	135	67	25.57	24.82	28.22	28.80	< 30.00
		1	1	25.65	24.95	28.32	28.90	< 30.00
		1	271	25.45	24.65	28.08	28.66	< 30.00
		270	0	24.11	23.34	26.75	27.33	< 30.00
		1	0	19.68	19.03	22.38	22.96	< 30.00
		1	272	19.43	18.62	22.05	22.63	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{\text{Port 0 Output Power} / 10} + 10^{\text{Port 1 Output Power} / 10}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM QPSK								
10	3455.01	12	6	25.41	24.63	28.05	28.63	< 30.00
		1	1	25.39	24.57	28.01	28.59	< 30.00
		1	22	25.32	24.60	27.99	28.57	< 30.00
		24	0	23.40	22.75	26.10	26.68	< 30.00
		1	0	18.94	18.23	21.61	22.19	< 30.00
		1	23	18.95	18.22	21.61	22.19	< 30.00
10	3500.01	12	6	25.46	24.66	28.09	28.67	< 30.00
		1	1	25.41	24.66	28.06	28.64	< 30.00
		1	22	24.37	24.67	27.53	28.11	< 30.00
		24	0	23.52	22.72	26.15	26.73	< 30.00
		1	0	18.98	18.26	21.65	22.23	< 30.00
		1	23	18.90	18.20	21.57	22.15	< 30.00
10	3544.98	12	6	25.46	24.59	28.06	28.64	< 30.00
		1	1	25.41	24.62	28.04	28.62	< 30.00
		1	22	24.35	24.63	27.50	28.08	< 30.00
		24	0	23.39	22.71	26.07	26.65	< 30.00
		1	0	19.05	18.24	21.67	22.25	< 30.00
		1	23	18.95	18.27	21.63	22.21	< 30.00
15	3457.50	18	9	25.74	24.87	28.34	28.92	< 30.00
		1	1	25.73	24.87	28.33	28.91	< 30.00
		1	36	25.77	24.82	28.33	28.91	< 30.00
		36	0	23.75	22.95	26.38	26.96	< 30.00
		1	0	19.26	18.52	21.92	22.50	< 30.00
		1	37	19.32	18.44	21.91	22.49	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM QPSK								
15	3500.01	18	9	25.71	24.96	28.36	28.94	< 30.00
		1	1	25.77	24.94	28.39	28.97	< 30.00
		1	36	25.74	24.95	28.37	28.95	< 30.00
		36	0	23.76	22.95	26.38	26.96	< 30.00
		1	0	19.36	18.51	21.97	22.55	< 30.00
		1	37	19.19	18.43	21.84	22.42	< 30.00
15	3542.49	18	9	25.75	24.91	28.36	28.94	< 30.00
		1	1	25.65	24.84	28.27	28.85	< 30.00
		1	36	25.78	24.85	28.35	28.93	< 30.00
		36	0	23.79	22.92	26.39	26.97	< 30.00
		1	0	19.29	18.51	21.93	22.51	< 30.00
		1	37	19.13	18.36	21.77	22.35	< 30.00
20	3460.02	25	12	25.92	25.09	28.54	29.12	< 30.00
		1	1	25.92	25.04	28.51	29.09	< 30.00
		1	49	25.89	25.06	28.51	29.09	< 30.00
		50	0	23.94	23.12	26.56	27.14	< 30.00
		1	0	19.42	18.68	22.08	22.66	< 30.00
		1	50	19.47	18.63	22.08	22.66	< 30.00
20	3500.01	25	12	25.82	25.11	28.49	29.07	< 30.00
		1	1	25.90	25.14	28.55	29.13	< 30.00
		1	49	25.74	24.96	28.38	28.96	< 30.00
		50	0	23.90	23.19	26.57	27.15	< 30.00
		1	0	19.44	18.65	22.07	22.65	< 30.00
		1	50	19.26	18.59	21.95	22.53	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM QPSK								
20	3540.00	25	12	25.82	25.01	28.44	29.02	< 30.00
		1	1	25.84	25.10	28.50	29.08	< 30.00
		1	49	25.80	24.96	28.41	28.99	< 30.00
		50	0	23.93	23.12	26.55	27.13	< 30.00
		1	0	19.52	18.74	22.16	22.74	< 30.00
		1	50	19.40	18.61	22.03	22.61	< 30.00
25	3462.51	32	16	25.91	25.17	28.57	29.15	< 30.00
		1	1	25.84	25.28	28.58	29.16	< 30.00
		1	63	25.87	25.16	28.54	29.12	< 30.00
		64	0	23.89	23.20	26.57	27.15	< 30.00
		1	0	19.29	18.74	22.03	22.61	< 30.00
		1	64	19.43	18.67	22.08	22.66	< 30.00
25	3500.01	32	16	25.87	25.12	28.52	29.10	< 30.00
		1	1	25.93	25.14	28.56	29.14	< 30.00
		1	63	25.79	25.09	28.46	29.04	< 30.00
		64	0	23.85	23.11	26.51	27.09	< 30.00
		1	0	20.40	18.74	22.66	23.24	< 30.00
		1	64	19.25	18.65	21.97	22.55	< 30.00
25	3537.48	32	16	25.83	25.05	28.47	29.05	< 30.00
		1	1	25.87	25.17	28.54	29.12	< 30.00
		1	63	25.78	25.06	28.45	29.03	< 30.00
		64	0	23.81	23.18	26.52	27.10	< 30.00
		1	0	19.39	18.69	22.06	22.64	< 30.00
		1	64	19.20	18.61	21.93	22.51	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM QPSK								
30	3465.00	36	18	25.94	25.20	28.60	29.18	< 30.00
		1	1	25.97	25.19	28.61	29.19	< 30.00
		1	76	25.86	25.07	28.49	29.07	< 30.00
		75	0	24.06	23.28	26.70	27.28	< 30.00
		1	0	19.47	18.85	22.18	22.76	< 30.00
		1	77	19.42	18.64	22.06	22.64	< 30.00
30	3500.01	36	18	25.84	25.11	28.50	29.08	< 30.00
		1	1	26.04	25.20	28.65	29.23	< 30.00
		1	76	25.87	25.14	28.53	29.11	< 30.00
		75	0	23.98	23.20	26.62	27.20	< 30.00
		1	0	19.70	18.91	22.33	22.91	< 30.00
		1	77	19.37	18.74	22.08	22.66	< 30.00
30	3534.99	36	18	25.83	25.12	28.50	29.08	< 30.00
		1	1	25.90	25.17	28.56	29.14	< 30.00
		1	76	25.80	25.04	28.45	29.03	< 30.00
		75	0	23.97	23.28	26.65	27.23	< 30.00
		1	0	19.57	18.87	22.24	22.82	< 30.00
		1	77	19.39	18.66	22.05	22.63	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{\text{Port 0 Output Power} / 10} + 10^{\text{Port 1 Output Power} / 10}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM QPSK								
40	3470.01	50	25	25.97	25.20	28.61	29.19	< 30.00
		1	1	25.98	25.33	28.68	29.26	< 30.00
		1	104	25.82	25.32	28.59	29.17	< 30.00
		100	0	24.04	23.33	26.71	27.29	< 30.00
		1	0	19.59	18.99	22.31	22.89	< 30.00
		1	105	19.49	18.90	22.22	22.80	< 30.00
40	3500.01	50	25	25.99	25.25	28.65	29.23	< 30.00
		1	1	26.13	25.29	28.74	29.32	< 30.00
		1	104	25.83	25.17	28.52	29.10	< 30.00
		100	0	23.98	23.31	26.67	27.25	< 30.00
		1	0	19.70	18.98	22.37	22.95	< 30.00
		1	105	19.40	18.82	22.13	22.71	< 30.00
40	3529.98	50	25	25.87	25.15	28.54	29.12	< 30.00
		1	1	25.83	25.30	28.58	29.16	< 30.00
		1	104	25.84	25.18	28.53	29.11	< 30.00
		100	0	23.93	23.21	26.60	27.18	< 30.00
		1	0	19.48	18.88	22.20	22.78	< 30.00
		1	105	19.44	18.72	22.11	22.69	< 30.00
50	3475.02	64	32	25.79	24.98	28.41	28.99	< 30.00
		1	1	25.78	25.22	28.52	29.10	< 30.00
		1	131	25.43	24.77	28.12	28.70	< 30.00
		128	0	23.81	23.04	26.45	27.03	< 30.00
		1	0	19.34	18.64	22.01	22.59	< 30.00
		1	132	19.05	18.30	21.70	22.28	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM QPSK								
50	3500.01	64	32	25.77	24.92	28.38	28.96	< 30.00
		1	1	25.91	25.05	28.51	29.09	< 30.00
		1	131	25.57	24.70	28.17	28.75	< 30.00
		128	0	23.81	23.02	26.44	27.02	< 30.00
		1	0	19.52	18.63	22.11	22.69	< 30.00
		1	132	19.10	18.39	21.77	22.35	< 30.00
50	3525.00	64	32	25.72	24.89	28.34	28.92	< 30.00
		1	1	25.74	24.98	28.39	28.97	< 30.00
		1	131	25.51	24.63	28.10	28.68	< 30.00
		128	0	23.83	22.98	26.44	27.02	< 30.00
		1	0	19.40	18.64	22.05	22.63	< 30.00
		1	132	19.16	18.22	21.73	22.31	< 30.00
60	3480.00	81	40	25.67	24.73	28.24	28.82	< 30.00
		1	1	25.68	24.79	28.27	28.85	< 30.00
		1	160	25.33	24.53	27.96	28.54	< 30.00
		162	0	23.64	22.76	26.23	26.81	< 30.00
		1	0	19.17	18.45	21.84	22.42	< 30.00
		1	161	18.85	18.16	21.53	22.11	< 30.00
60	3500.01	81	40	25.60	24.75	28.21	28.79	< 30.00
		1	1	25.74	24.81	28.31	28.89	< 30.00
		1	160	25.34	24.60	28.00	28.58	< 30.00
		162	0	23.66	22.76	26.24	26.82	< 30.00
		1	0	19.31	18.34	21.86	22.44	< 30.00
		1	161	18.86	18.05	21.48	22.06	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM QPSK								
60	3519.99	81	40	25.63	24.81	28.25	28.83	< 30.00
		1	1	25.71	24.82	28.30	28.88	< 30.00
		1	160	25.43	24.39	27.95	28.53	< 30.00
		162	0	23.68	22.70	26.23	26.81	< 30.00
		1	0	19.24	18.32	21.81	22.39	< 30.00
		1	161	18.98	17.99	21.52	22.10	< 30.00
70	3485.01	90	45	25.47	24.70	28.11	28.69	< 30.00
		1	1	25.66	24.77	28.25	28.83	< 30.00
		1	187	25.20	24.53	27.89	28.47	< 30.00
		180	0	23.59	22.79	26.22	26.80	< 30.00
		1	0	19.12	18.43	21.80	22.38	< 30.00
		1	188	18.71	18.02	21.39	21.97	< 30.00
70	3500.01	90	45	25.59	24.71	28.18	28.76	< 30.00
		1	1	25.83	24.89	28.40	28.98	< 30.00
		1	187	25.26	24.47	27.89	28.47	< 30.00
		180	0	23.54	22.82	26.21	26.79	< 30.00
		1	0	19.16	18.47	21.84	22.42	< 30.00
		1	188	18.81	17.93	21.40	21.98	< 30.00
70	3514.98	90	45	25.55	24.72	28.17	28.75	< 30.00
		1	1	25.68	24.74	28.25	28.83	< 30.00
		1	187	25.22	24.61	27.94	28.52	< 30.00
		180	0	23.51	22.70	26.13	26.71	< 30.00
		1	0	19.26	18.44	21.88	22.46	< 30.00
		1	188	18.82	17.99	21.44	22.02	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM QPSK								
80	3490.02	108	54	25.56	24.77	28.19	28.77	< 30.00
		1	1	25.68	24.73	28.24	28.82	< 30.00
		1	215	25.28	24.54	27.94	28.52	< 30.00
		216	0	23.51	22.79	26.18	26.76	< 30.00
		1	0	19.15	18.45	21.82	22.40	< 30.00
		1	216	18.73	18.07	21.42	22.00	< 30.00
80	3500.01	108	54	25.54	24.73	28.16	28.74	< 30.00
		1	1	25.79	24.79	28.33	28.91	< 30.00
		1	215	25.37	24.40	27.92	28.50	< 30.00
		216	0	23.67	22.76	26.25	26.83	< 30.00
		1	0	19.24	18.43	21.86	22.44	< 30.00
		1	216	18.87	17.92	21.43	22.01	< 30.00
80	3510.00	108	54	25.50	24.72	28.14	28.72	< 30.00
		1	1	25.70	24.71	28.24	28.82	< 30.00
		1	215	25.33	24.47	27.93	28.51	< 30.00
		216	0	23.56	22.74	26.18	26.76	< 30.00
		1	0	19.27	18.40	21.87	22.45	< 30.00
		1	216	18.79	18.01	21.43	22.01	< 30.00
90	3495.00	120	60	25.60	24.74	28.20	28.78	< 30.00
		1	1	25.62	24.88	28.28	28.86	< 30.00
		1	243	25.34	24.50	27.95	28.53	< 30.00
		243	0	23.56	22.80	26.21	26.79	< 30.00
		1	0	19.15	18.48	21.84	22.42	< 30.00
		1	244	18.91	18.10	21.53	22.11	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM QPSK								
90	3500.01	120	60	25.57	24.82	28.22	28.80	< 30.00
		1	1	25.71	24.86	28.32	28.90	< 30.00
		1	243	25.36	24.63	28.02	28.60	< 30.00
		243	0	23.61	22.86	26.26	26.84	< 30.00
		1	0	19.18	18.50	21.86	22.44	< 30.00
		1	244	18.90	17.98	21.47	22.05	< 30.00
90	3504.99	120	60	25.63	24.83	28.26	28.84	< 30.00
		1	1	25.84	24.91	28.41	28.99	< 30.00
		1	243	25.42	24.62	28.05	28.63	< 30.00
		243	0	23.74	22.83	26.32	26.90	< 30.00
		1	0	19.42	18.53	22.01	22.59	< 30.00
		1	244	19.10	18.14	21.66	22.24	< 30.00
100	3500.01	135	67	25.56	24.86	28.23	28.81	< 30.00
		1	1	25.68	24.86	28.30	28.88	< 30.00
		1	271	25.47	24.60	28.07	28.65	< 30.00
		270	0	23.57	22.82	26.22	26.80	< 30.00
		1	0	19.14	18.49	21.84	22.42	< 30.00
		1	272	18.86	18.11	21.51	22.09	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{\text{Port 0 Output Power} / 10} + 10^{\text{Port 1 Output Power} / 10}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 16QAM								
10	3455.01	12	6	24.42	23.67	27.07	27.65	< 30.00
		1	1	24.38	23.65	27.04	27.62	< 30.00
		1	22	24.28	23.57	26.95	27.53	< 30.00
		24	0	22.49	21.80	25.17	25.75	< 30.00
		1	0	18.94	18.06	21.53	22.11	< 30.00
		1	23	18.91	18.23	21.59	22.17	< 30.00
10	3500.01	12	6	24.36	23.59	27.00	27.58	< 30.00
		1	1	24.44	23.61	27.06	27.64	< 30.00
		1	22	24.28	23.45	26.90	27.48	< 30.00
		24	0	22.59	21.78	25.21	25.79	< 30.00
		1	0	18.98	18.22	21.63	22.21	< 30.00
		1	23	18.90	18.04	21.50	22.08	< 30.00
10	3544.98	12	6	24.42	23.60	27.04	27.62	< 30.00
		1	1	24.46	23.57	27.05	27.63	< 30.00
		1	22	24.27	23.51	26.92	27.50	< 30.00
		24	0	22.53	21.75	25.17	25.75	< 30.00
		1	0	19.06	18.25	21.68	22.26	< 30.00
		1	23	18.93	18.11	21.55	22.13	< 30.00
15	3457.50	18	9	24.72	23.90	27.34	27.92	< 30.00
		1	1	24.70	23.89	27.32	27.90	< 30.00
		1	36	24.63	23.70	27.20	27.78	< 30.00
		36	0	22.83	21.99	25.44	26.02	< 30.00
		1	0	19.15	18.36	21.78	22.36	< 30.00
		1	37	19.30	18.49	21.92	22.50	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 16QAM								
15	3500.01	18	9	24.69	23.91	27.33	27.91	< 30.00
		1	1	24.55	23.78	27.19	27.77	< 30.00
		1	36	24.52	23.81	27.19	27.77	< 30.00
		36	0	22.79	21.99	25.42	26.00	< 30.00
		1	0	19.18	18.48	21.85	22.43	< 30.00
		1	37	19.08	18.34	21.74	22.32	< 30.00
15	3542.49	18	9	24.69	23.84	27.30	27.88	< 30.00
		1	1	24.51	23.82	27.19	27.77	< 30.00
		1	36	24.51	23.66	27.12	27.70	< 30.00
		36	0	22.81	21.97	25.42	26.00	< 30.00
		1	0	19.20	18.38	21.82	22.40	< 30.00
		1	37	19.16	18.33	21.78	22.36	< 30.00
20	3460.02	25	12	24.90	24.10	27.53	28.11	< 30.00
		1	1	24.67	23.88	27.30	27.88	< 30.00
		1	49	24.90	24.05	27.51	28.09	< 30.00
		50	0	23.02	22.21	25.64	26.22	< 30.00
		1	0	19.32	18.52	21.95	22.53	< 30.00
		1	50	19.39	18.60	22.02	22.60	< 30.00
20	3500.01	25	12	24.88	24.12	27.53	28.11	< 30.00
		1	1	24.84	24.07	27.48	28.06	< 30.00
		1	49	24.52	23.95	27.25	27.83	< 30.00
		50	0	22.92	22.17	25.57	26.15	< 30.00
		1	0	19.34	18.54	21.97	22.55	< 30.00
		1	50	19.30	18.50	21.93	22.51	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 16QAM								
20	3540.00	25	12	24.85	24.06	27.48	28.06	< 30.00
		1	1	24.95	24.14	27.57	28.15	< 30.00
		1	49	24.81	24.05	27.46	28.04	< 30.00
		50	0	22.95	22.14	25.57	26.15	< 30.00
		1	0	19.31	18.57	21.97	22.55	< 30.00
		1	50	19.27	18.44	21.89	22.47	< 30.00
25	3462.51	32	16	24.91	24.15	27.56	28.14	< 30.00
		1	1	24.78	24.16	27.49	28.07	< 30.00
		1	63	24.83	24.15	27.51	28.09	< 30.00
		64	0	22.89	22.18	25.56	26.14	< 30.00
		1	0	19.42	18.78	22.12	22.70	< 30.00
		1	64	19.38	18.61	22.02	22.60	< 30.00
25	3500.01	32	16	24.85	24.12	27.51	28.09	< 30.00
		1	1	24.96	24.06	27.54	28.12	< 30.00
		1	63	24.76	24.06	27.43	28.01	< 30.00
		64	0	22.81	22.11	25.48	26.06	< 30.00
		1	0	19.37	18.75	22.08	22.66	< 30.00
		1	64	19.23	18.53	21.90	22.48	< 30.00
25	3537.48	32	16	24.86	24.11	27.51	28.09	< 30.00
		1	1	24.80	24.00	27.43	28.01	< 30.00
		1	63	24.71	24.04	27.40	27.98	< 30.00
		64	0	22.84	22.17	25.53	26.11	< 30.00
		1	0	19.36	18.69	22.05	22.63	< 30.00
		1	64	19.17	18.39	21.81	22.39	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 16QAM								
30	3465.00	36	18	24.95	24.21	27.61	28.19	< 30.00
		1	1	24.97	24.28	27.65	28.23	< 30.00
		1	76	24.69	23.97	27.36	27.94	< 30.00
		75	0	23.10	22.33	25.74	26.32	< 30.00
		1	0	19.45	18.82	22.16	22.74	< 30.00
		1	77	19.38	18.72	22.07	22.65	< 30.00
30	3500.01	36	18	24.86	24.11	27.51	28.09	< 30.00
		1	1	24.96	24.20	27.61	28.19	< 30.00
		1	76	24.65	23.95	27.32	27.90	< 30.00
		75	0	23.08	22.24	25.69	26.27	< 30.00
		1	0	19.58	18.87	22.25	22.83	< 30.00
		1	77	19.41	18.71	22.08	22.66	< 30.00
30	3534.99	36	18	24.87	24.08	27.50	28.08	< 30.00
		1	1	24.69	23.99	27.36	27.94	< 30.00
		1	76	24.75	24.09	27.44	28.02	< 30.00
		75	0	22.99	22.31	25.67	26.25	< 30.00
		1	0	19.38	18.85	22.13	22.71	< 30.00
		1	77	19.36	18.54	21.98	22.56	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{\text{Port 0 Output Power} / 10} + 10^{\text{Port 1 Output Power} / 10}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 16QAM								
40	3470.01	50	25	25.00	24.24	27.65	28.23	< 30.00
		1	1	24.86	24.28	27.59	28.17	< 30.00
		1	104	24.91	24.26	27.61	28.19	< 30.00
		100	0	23.02	22.35	25.71	26.29	< 30.00
		1	0	19.54	18.96	22.27	22.85	< 30.00
		1	105	19.54	18.95	22.27	22.85	< 30.00
40	3500.01	50	25	24.94	24.16	27.58	28.16	< 30.00
		1	1	25.19	24.27	27.76	28.34	< 30.00
		1	104	24.84	24.21	27.55	28.13	< 30.00
		100	0	23.04	22.31	25.70	26.28	< 30.00
		1	0	19.75	19.02	22.41	22.99	< 30.00
		1	105	19.31	18.71	22.03	22.61	< 30.00
40	3529.98	50	25	24.89	24.14	27.54	28.12	< 30.00
		1	1	24.98	24.26	27.65	28.23	< 30.00
		1	104	24.74	24.14	27.46	28.04	< 30.00
		100	0	22.93	22.25	25.61	26.19	< 30.00
		1	0	19.62	18.91	22.29	22.87	< 30.00
		1	105	19.56	18.83	22.22	22.80	< 30.00
50	3475.02	64	32	14.81	23.97	24.47	25.05	< 30.00
		1	1	24.60	23.81	27.23	27.81	< 30.00
		1	131	24.47	23.67	27.10	27.68	< 30.00
		128	0	22.84	22.06	25.48	26.06	< 30.00
		1	0	19.23	18.57	21.92	22.50	< 30.00
		1	132	18.99	18.31	21.67	22.25	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 16QAM								
50	3500.01	64	32	24.74	23.98	27.39	27.97	< 30.00
		1	1	24.95	24.02	27.52	28.10	< 30.00
		1	131	24.32	23.52	26.95	27.53	< 30.00
		128	0	22.82	22.07	25.47	26.05	< 30.00
		1	0	19.60	18.70	22.18	22.76	< 30.00
		1	132	19.21	18.31	21.79	22.37	< 30.00
50	3525.00	64	32	24.75	23.89	27.35	27.93	< 30.00
		1	1	24.53	23.82	27.20	27.78	< 30.00
		1	131	24.50	23.65	27.11	27.69	< 30.00
		128	0	22.83	22.02	25.45	26.03	< 30.00
		1	0	19.26	18.46	21.89	22.47	< 30.00
		1	132	19.03	18.19	21.64	22.22	< 30.00
60	3480.00	81	40	24.63	23.66	27.18	27.76	< 30.00
		1	1	24.66	23.76	27.24	27.82	< 30.00
		1	160	24.18	23.40	26.82	27.40	< 30.00
		162	0	22.66	21.77	25.25	25.83	< 30.00
		1	0	19.10	18.31	21.73	22.31	< 30.00
		1	161	18.76	17.97	21.39	21.97	< 30.00
60	3500.01	81	40	24.55	23.72	27.17	27.75	< 30.00
		1	1	24.68	23.78	27.26	27.84	< 30.00
		1	160	24.36	23.34	26.89	27.47	< 30.00
		162	0	22.67	21.77	25.25	25.83	< 30.00
		1	0	19.23	18.29	21.80	22.38	< 30.00
		1	161	18.87	18.01	21.47	22.05	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 16QAM								
60	3519.99	81	40	24.62	23.69	27.19	27.77	< 30.00
		1	1	24.72	23.77	27.28	27.86	< 30.00
		1	160	24.34	23.40	26.91	27.49	< 30.00
		162	0	22.68	21.71	25.23	25.81	< 30.00
		1	0	19.19	18.25	21.76	22.34	< 30.00
		1	161	18.85	17.96	21.44	22.02	< 30.00
70	3485.01	90	45	24.51	23.74	27.15	27.73	< 30.00
		1	1	24.53	23.78	27.18	27.76	< 30.00
		1	187	24.26	23.51	26.91	27.49	< 30.00
		180	0	22.58	21.78	25.21	25.79	< 30.00
		1	0	19.04	18.30	21.70	22.28	< 30.00
		1	188	18.68	17.97	21.35	21.93	< 30.00
70	3500.01	90	45	24.52	23.70	27.14	27.72	< 30.00
		1	1	24.81	23.73	27.31	27.89	< 30.00
		1	187	24.04	23.25	26.67	27.25	< 30.00
		180	0	22.54	21.80	25.20	25.78	< 30.00
		1	0	19.22	18.41	21.84	22.42	< 30.00
		1	188	18.82	17.97	21.43	22.01	< 30.00
70	3514.98	90	45	24.47	23.66	27.09	27.67	< 30.00
		1	1	24.61	23.76	27.22	27.80	< 30.00
		1	187	24.18	23.32	26.78	27.36	< 30.00
		180	0	22.55	21.69	25.15	25.73	< 30.00
		1	0	19.19	18.28	21.77	22.35	< 30.00
		1	188	18.66	17.91	21.31	21.89	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 16QAM								
80	3490.02	108	54	24.54	23.72	27.16	27.74	< 30.00
		1	1	24.69	23.75	27.26	27.84	< 30.00
		1	215	24.02	23.23	26.65	27.23	< 30.00
		216	0	22.55	21.78	25.19	25.77	< 30.00
		1	0	19.15	18.55	21.87	22.45	< 30.00
		1	216	18.74	18.11	21.45	22.03	< 30.00
80	3500.01	108	54	24.50	23.78	27.17	27.75	< 30.00
		1	1	24.74	23.78	27.30	27.88	< 30.00
		1	215	24.38	23.49	26.97	27.55	< 30.00
		216	0	22.66	21.76	25.24	25.82	< 30.00
		1	0	19.18	18.32	21.78	22.36	< 30.00
		1	216	18.84	17.96	21.43	22.01	< 30.00
80	3510.00	108	54	24.50	23.73	27.14	27.72	< 30.00
		1	1	24.69	23.70	27.23	27.81	< 30.00
		1	215	24.28	23.33	26.84	27.42	< 30.00
		216	0	22.57	21.74	25.19	25.77	< 30.00
		1	0	19.20	18.30	21.78	22.36	< 30.00
		1	216	18.69	17.86	21.31	21.89	< 30.00
90	3495.00	120	60	24.59	23.72	27.19	27.77	< 30.00
		1	1	24.63	23.81	27.25	27.83	< 30.00
		1	243	24.36	23.58	27.00	27.58	< 30.00
		243	0	22.63	21.86	25.27	25.85	< 30.00
		1	0	19.03	18.25	21.67	22.25	< 30.00
		1	244	18.82	18.01	21.44	22.02	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 16QAM								
90	3500.01	120	60	24.61	23.82	27.24	27.82	< 30.00
		1	1	24.87	23.82	27.39	27.97	< 30.00
		1	243	24.35	23.56	26.98	27.56	< 30.00
		243	0	22.66	21.90	25.31	25.89	< 30.00
		1	0	19.11	18.43	21.79	22.37	< 30.00
		1	244	18.83	18.06	21.47	22.05	< 30.00
90	3504.99	120	60	24.67	23.82	27.28	27.86	< 30.00
		1	1	24.71	23.82	27.30	27.88	< 30.00
		1	243	24.31	23.45	26.91	27.49	< 30.00
		243	0	22.70	21.84	25.30	25.88	< 30.00
		1	0	19.61	18.37	22.04	22.62	< 30.00
		1	244	19.10	18.22	21.69	22.27	< 30.00
100	3500.01	135	67	24.55	23.83	27.22	27.80	< 30.00
		1	1	24.62	23.79	27.24	27.82	< 30.00
		1	271	24.31	23.58	26.97	27.55	< 30.00
		270	0	22.61	21.83	25.25	25.83	< 30.00
		1	0	19.15	18.40	21.80	22.38	< 30.00
		1	272	18.80	18.06	21.46	22.04	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{\text{Port 0 Output Power} / 10} + 10^{\text{Port 1 Output Power} / 10}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 64QAM								
10	3455.01	12	6	22.58	21.75	25.20	25.78	< 30.00
		1	1	22.63	21.79	25.24	25.82	< 30.00
		1	22	22.45	21.77	25.13	25.71	< 30.00
		24	0	22.05	21.31	24.71	25.29	< 30.00
		1	0	19.09	18.33	21.74	22.32	< 30.00
		1	23	18.90	18.21	21.58	22.16	< 30.00
10	3500.01	12	6	22.57	21.76	25.19	25.77	< 30.00
		1	1	22.66	21.86	25.29	25.87	< 30.00
		1	22	22.53	21.97	25.27	25.85	< 30.00
		24	0	22.00	21.21	24.63	25.21	< 30.00
		1	0	19.10	18.38	21.77	22.35	< 30.00
		1	23	19.01	18.33	21.69	22.27	< 30.00
10	3544.98	12	6	22.51	21.75	25.16	25.74	< 30.00
		1	1	22.45	21.66	25.08	25.66	< 30.00
		1	22	22.52	21.75	25.16	25.74	< 30.00
		24	0	22.02	21.27	24.67	25.25	< 30.00
		1	0	19.08	18.28	21.71	22.29	< 30.00
		1	23	19.13	18.36	21.77	22.35	< 30.00
15	3457.50	18	9	22.80	21.97	25.42	26.00	< 30.00
		1	1	22.79	22.13	25.48	26.06	< 30.00
		1	36	22.89	21.99	25.47	26.05	< 30.00
		36	0	22.38	21.52	24.98	25.56	< 30.00
		1	0	19.16	18.37	21.79	22.37	< 30.00
		1	37	19.33	18.37	21.89	22.47	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 64QAM								
15	3500.01	18	9	22.78	22.01	25.42	26.00	< 30.00
		1	1	22.81	22.03	25.45	26.03	< 30.00
		1	36	22.82	22.08	25.48	26.06	< 30.00
		36	0	22.29	21.48	24.91	25.49	< 30.00
		1	0	19.58	18.78	22.21	22.79	< 30.00
		1	37	19.34	18.73	22.06	22.64	< 30.00
15	3542.49	18	9	22.83	21.95	25.42	26.00	< 30.00
		1	1	22.73	22.02	25.40	25.98	< 30.00
		1	36	22.75	21.95	25.38	25.96	< 30.00
		36	0	22.36	21.48	24.95	25.53	< 30.00
		1	0	19.57	18.88	22.25	22.83	< 30.00
		1	37	19.24	18.39	21.85	22.43	< 30.00
20	3460.02	25	12	22.92	22.14	25.56	26.14	< 30.00
		1	1	22.89	22.08	25.51	26.09	< 30.00
		1	49	23.10	22.15	25.66	26.24	< 30.00
		50	0	22.52	21.70	25.14	25.72	< 30.00
		1	0	19.41	18.64	22.05	22.63	< 30.00
		1	50	19.35	18.50	21.96	22.54	< 30.00
20	3500.01	25	12	22.87	22.15	25.54	26.12	< 30.00
		1	1	22.88	22.14	25.54	26.12	< 30.00
		1	49	22.77	22.16	25.49	26.07	< 30.00
		50	0	22.50	21.70	25.13	25.71	< 30.00
		1	0	19.37	18.51	21.97	22.55	< 30.00
		1	50	19.25	18.49	21.90	22.48	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 64QAM								
20	3540.00	25	12	22.88	22.13	25.53	26.11	< 30.00
		1	1	22.82	22.17	25.52	26.10	< 30.00
		1	49	23.01	22.23	25.65	26.23	< 30.00
		50	0	22.43	21.63	25.06	25.64	< 30.00
		1	0	19.42	18.61	22.04	22.62	< 30.00
		1	50	19.21	18.39	21.83	22.41	< 30.00
25	3462.51	32	16	22.89	22.22	25.58	26.16	< 30.00
		1	1	22.78	22.21	25.51	26.09	< 30.00
		1	63	22.87	22.17	25.54	26.12	< 30.00
		64	0	22.47	21.74	25.13	25.71	< 30.00
		1	0	19.51	18.84	22.20	22.78	< 30.00
		1	64	19.56	18.74	22.18	22.76	< 30.00
25	3500.01	32	16	22.75	22.11	25.45	26.03	< 30.00
		1	1	22.82	22.05	25.46	26.04	< 30.00
		1	63	22.80	22.06	25.46	26.04	< 30.00
		64	0	22.40	21.64	25.05	25.63	< 30.00
		1	0	19.74	19.12	22.45	23.03	< 30.00
		1	64	19.25	18.73	22.01	22.59	< 30.00
25	3537.48	32	16	22.88	22.16	25.55	26.13	< 30.00
		1	1	22.70	22.23	25.48	26.06	< 30.00
		1	63	22.68	21.98	25.35	25.93	< 30.00
		64	0	22.38	21.68	25.05	25.63	< 30.00
		1	0	19.30	18.75	22.04	22.62	< 30.00
		1	64	19.43	18.85	22.16	22.74	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 64QAM								
30	3465.00	36	18	23.02	22.29	25.68	26.26	< 30.00
		1	1	23.04	22.34	25.71	26.29	< 30.00
		1	76	23.20	22.45	25.85	26.43	< 30.00
		75	0	22.61	21.84	25.25	25.83	< 30.00
		1	0	19.45	18.81	22.15	22.73	< 30.00
		1	77	19.56	18.72	22.17	22.75	< 30.00
30	3500.01	36	18	22.94	22.23	25.61	26.19	< 30.00
		1	1	23.14	22.35	25.77	26.35	< 30.00
		1	76	22.96	22.27	25.64	26.22	< 30.00
		75	0	22.58	21.80	25.22	25.80	< 30.00
		1	0	19.71	19.02	22.39	22.97	< 30.00
		1	77	19.44	18.79	22.14	22.72	< 30.00
30	3534.99	36	18	22.93	22.17	25.58	26.16	< 30.00
		1	1	23.08	22.35	25.74	26.32	< 30.00
		1	76	22.96	22.30	25.65	26.23	< 30.00
		75	0	22.49	21.82	25.18	25.76	< 30.00
		1	0	19.49	18.85	22.19	22.77	< 30.00
		1	77	19.27	18.54	21.93	22.51	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{\text{Port 0 Output Power} / 10} + 10^{\text{Port 1 Output Power} / 10}\}$								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 64QAM								
40	3470.01	50	25	23.04	22.34	25.71	26.29	< 30.00
		1	1	23.02	22.36	25.71	26.29	< 30.00
		1	104	23.08	22.40	25.76	26.34	< 30.00
		100	0	22.55	21.93	25.26	25.84	< 30.00
		1	0	19.63	19.01	22.34	22.92	< 30.00
		1	105	19.49	18.94	22.23	22.81	< 30.00
40	3500.01	50	25	22.98	22.16	25.60	26.18	< 30.00
		1	1	23.20	22.37	25.82	26.40	< 30.00
		1	104	23.03	22.29	25.69	26.27	< 30.00
		100	0	22.58	21.85	25.24	25.82	< 30.00
		1	0	19.89	19.14	22.54	23.12	< 30.00
		1	105	19.33	18.71	22.04	22.62	< 30.00
40	3529.98	50	25	22.93	22.25	25.61	26.19	< 30.00
		1	1	23.11	22.50	25.83	26.41	< 30.00
		1	104	23.03	22.42	25.75	26.33	< 30.00
		100	0	22.52	21.83	25.20	25.78	< 30.00
		1	0	19.53	18.83	22.20	22.78	< 30.00
		1	105	19.39	18.74	22.09	22.67	< 30.00
50	3475.02	64	32	22.82	22.09	25.48	26.06	< 30.00
		1	1	22.96	22.32	25.66	26.24	< 30.00
		1	131	22.76	21.94	25.38	25.96	< 30.00
		128	0	22.28	21.54	24.94	25.52	< 30.00
		1	0	19.27	18.65	21.98	22.56	< 30.00
		1	132	18.95	18.24	21.62	22.20	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 64QAM								
50	3500.01	64	32	22.81	22.04	25.45	26.03	< 30.00
		1	1	23.18	22.35	25.80	26.38	< 30.00
		1	131	22.64	21.89	25.29	25.87	< 30.00
		128	0	22.30	21.51	24.93	25.51	< 30.00
		1	0	19.54	18.63	22.12	22.70	< 30.00
		1	132	19.05	18.35	21.72	22.30	< 30.00
50	3525.00	64	32	22.79	21.94	25.40	25.98	< 30.00
		1	1	23.07	22.23	25.68	26.26	< 30.00
		1	131	22.54	21.72	25.16	25.74	< 30.00
		128	0	22.30	21.46	24.91	25.49	< 30.00
		1	0	19.38	18.59	22.01	22.59	< 30.00
		1	132	19.25	18.38	21.85	22.43	< 30.00
60	3480.00	81	40	22.67	21.78	25.26	25.84	< 30.00
		1	1	22.85	21.92	25.42	26.00	< 30.00
		1	160	22.46	21.67	25.09	25.67	< 30.00
		162	0	22.13	21.29	24.74	25.32	< 30.00
		1	0	19.21	18.38	21.83	22.41	< 30.00
		1	161	18.85	18.04	21.47	22.05	< 30.00
60	3500.01	81	40	22.67	21.82	25.28	25.86	< 30.00
		1	1	23.05	22.11	25.62	26.20	< 30.00
		1	160	22.56	21.67	25.15	25.73	< 30.00
		162	0	22.15	21.30	24.76	25.34	< 30.00
		1	0	19.23	18.20	21.76	22.34	< 30.00
		1	161	18.82	17.98	21.43	22.01	< 30.00

Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$

Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 64QAM								
60	3519.99	81	40	22.65	21.77	25.24	25.82	< 30.00
		1	1	22.78	21.85	25.35	25.93	< 30.00
		1	160	22.55	21.48	25.06	25.64	< 30.00
		162	0	22.20	21.19	24.73	25.31	< 30.00
		1	0	19.50	18.65	22.11	22.69	< 30.00
		1	161	19.04	18.02	21.57	22.15	< 30.00
70	3485.01	90	45	22.52	21.75	25.16	25.74	< 30.00
		1	1	22.93	21.90	25.46	26.04	< 30.00
		1	187	22.41	21.72	25.09	25.67	< 30.00
		180	0	22.16	21.31	24.77	25.35	< 30.00
		1	0	19.28	18.37	21.86	22.44	< 30.00
		1	188	18.78	18.08	21.45	22.03	< 30.00
70	3500.01	90	45	22.55	21.79	25.20	25.78	< 30.00
		1	1	22.92	21.96	25.48	26.06	< 30.00
		1	187	22.56	21.65	25.14	25.72	< 30.00
		180	0	22.10	21.31	24.73	25.31	< 30.00
		1	0	19.14	18.34	21.77	22.35	< 30.00
		1	188	18.82	18.01	21.44	22.02	< 30.00
70	3514.98	90	45	22.56	21.76	25.19	25.77	< 30.00
		1	1	22.82	21.87	25.38	25.96	< 30.00
		1	187	22.48	21.65	25.10	25.68	< 30.00
		180	0	22.10	21.25	24.71	25.29	< 30.00
		1	0	19.11	18.34	21.75	22.33	< 30.00
		1	188	18.68	17.87	21.30	21.88	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 64QAM								
80	3490.02	108	54	22.61	21.76	25.22	25.80	< 30.00
		1	1	22.69	21.96	25.35	25.93	< 30.00
		1	215	22.50	21.63	25.10	25.68	< 30.00
		216	0	22.05	21.36	24.73	25.31	< 30.00
		1	0	18.99	18.37	21.70	22.28	< 30.00
		1	216	18.69	17.98	21.36	21.94	< 30.00
80	3500.01	108	54	22.54	21.75	25.17	25.75	< 30.00
		1	1	22.98	22.10	25.57	26.15	< 30.00
		1	215	22.35	21.55	24.98	25.56	< 30.00
		216	0	22.16	21.31	24.77	25.35	< 30.00
		1	0	19.48	18.58	22.06	22.64	< 30.00
		1	216	19.04	18.21	21.66	22.24	< 30.00
80	3510.00	108	54	22.51	21.71	25.14	25.72	< 30.00
		1	1	22.84	21.92	25.41	25.99	< 30.00
		1	215	22.25	21.51	24.91	25.49	< 30.00
		216	0	22.03	21.23	24.66	25.24	< 30.00
		1	0	19.52	18.68	22.13	22.71	< 30.00
		1	216	19.09	18.25	21.70	22.28	< 30.00
90	3495.00	120	60	22.66	21.82	25.27	25.85	< 30.00
		1	1	22.71	22.00	25.38	25.96	< 30.00
		1	243	22.50	21.64	25.10	25.68	< 30.00
		243	0	22.10	21.36	24.76	25.34	< 30.00
		1	0	19.20	18.49	21.87	22.45	< 30.00
		1	244	19.14	18.37	21.78	22.36	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 64QAM								
90	3500.01	120	60	22.65	21.89	25.30	25.88	< 30.00
		1	1	22.96	22.08	25.55	26.13	< 30.00
		1	243	22.58	21.84	25.24	25.82	< 30.00
		243	0	22.13	21.37	24.78	25.36	< 30.00
		1	0	19.25	18.53	21.92	22.50	< 30.00
		1	244	18.86	18.07	21.49	22.07	< 30.00
90	3504.99	120	60	22.66	21.92	25.32	25.90	< 30.00
		1	1	23.02	22.04	25.57	26.15	< 30.00
		1	243	22.58	21.68	25.16	25.74	< 30.00
		243	0	22.19	21.37	24.81	25.39	< 30.00
		1	0	19.46	18.62	22.07	22.65	< 30.00
		1	244	19.10	18.12	21.65	22.23	< 30.00
100	3500.01	135	67	22.62	21.82	25.25	25.83	< 30.00
		1	1	22.81	21.97	25.42	26.00	< 30.00
		1	271	22.50	21.61	25.09	25.67	< 30.00
		270	0	22.13	21.33	24.76	25.34	< 30.00
		1	0	19.36	18.70	22.05	22.63	< 30.00
		1	272	18.96	18.23	21.62	22.20	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{\text{Port 0 Output Power} / 10} + 10^{\text{Port 1 Output Power} / 10}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 256QAM								
10	3455.01	12	6	20.33	19.66	23.02	23.60	< 30.00
		1	1	20.07	19.36	22.74	23.32	< 30.00
		1	22	20.10	19.45	22.80	23.38	< 30.00
		24	0	20.16	19.45	22.83	23.41	< 30.00
		1	0	19.09	18.39	21.76	22.34	< 30.00
		1	23	19.04	18.40	21.74	22.32	< 30.00
10	3500.01	12	6	20.29	19.59	22.96	23.54	< 30.00
		1	1	20.18	18.51	22.44	23.02	< 30.00
		1	22	20.54	19.59	23.10	23.68	< 30.00
		24	0	20.18	19.51	22.87	23.45	< 30.00
		1	0	19.09	18.46	21.80	22.38	< 30.00
		1	23	18.99	18.44	21.73	22.31	< 30.00
10	3544.98	12	6	20.21	19.41	22.84	23.42	< 30.00
		1	1	20.10	19.48	22.81	23.39	< 30.00
		1	22	20.10	19.45	22.80	23.38	< 30.00
		24	0	20.23	19.41	22.85	23.43	< 30.00
		1	0	19.21	18.54	21.90	22.48	< 30.00
		1	23	19.04	18.38	21.73	22.31	< 30.00
15	3457.50	18	9	20.48	19.74	23.14	23.72	< 30.00
		1	1	20.30	19.63	22.99	23.57	< 30.00
		1	36	20.45	19.81	23.15	23.73	< 30.00
		36	0	20.34	19.50	22.95	23.53	< 30.00
		1	0	18.37	18.58	21.49	22.07	< 30.00
		1	37	19.30	18.48	21.92	22.50	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 256QAM								
15	3500.01	18	9	20.39	19.61	23.03	23.61	< 30.00
		1	1	20.24	19.46	22.88	23.46	< 30.00
		1	36	20.17	19.42	22.82	23.40	< 30.00
		36	0	20.30	19.52	22.94	23.52	< 30.00
		1	0	19.21	18.42	21.84	22.42	< 30.00
		1	37	19.34	18.53	21.96	22.54	< 30.00
15	3542.49	18	9	20.34	19.51	22.96	23.54	< 30.00
		1	1	20.27	19.50	22.91	23.49	< 30.00
		1	36	20.34	19.52	22.96	23.54	< 30.00
		36	0	20.25	19.44	22.87	23.45	< 30.00
		1	0	19.23	18.44	21.86	22.44	< 30.00
		1	37	19.33	18.47	21.93	22.51	< 30.00
20	3460.02	25	12	20.51	19.74	23.15	23.73	< 30.00
		1	1	20.25	19.46	22.88	23.46	< 30.00
		1	49	20.52	19.70	23.14	23.72	< 30.00
		50	0	20.47	19.69	23.11	23.69	< 30.00
		1	0	19.17	18.48	21.85	22.43	< 30.00
		1	50	19.32	18.46	21.92	22.50	< 30.00
20	3500.01	25	12	20.47	19.74	23.13	23.71	< 30.00
		1	1	20.58	19.81	23.22	23.80	< 30.00
		1	49	20.51	19.74	23.15	23.73	< 30.00
		50	0	20.43	19.65	23.07	23.65	< 30.00
		1	0	19.57	18.83	22.23	22.81	< 30.00
		1	50	19.44	18.70	22.10	22.68	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 256QAM								
20	3540.00	25	12	20.41	19.62	23.04	23.62	< 30.00
		1	1	20.43	19.71	23.10	23.68	< 30.00
		1	49	20.47	19.66	23.09	23.67	< 30.00
		50	0	20.45	19.67	23.09	23.67	< 30.00
		1	0	19.58	18.76	22.20	22.78	< 30.00
		1	50	19.25	18.40	21.86	22.44	< 30.00
25	3462.51	32	16	20.49	19.75	23.15	23.73	< 30.00
		1	1	20.60	19.88	23.27	23.85	< 30.00
		1	63	20.36	19.58	23.00	23.58	< 30.00
		64	0	20.47	19.76	23.14	23.72	< 30.00
		1	0	19.46	18.91	22.20	22.78	< 30.00
		1	64	19.59	18.73	22.19	22.77	< 30.00
25	3500.01	32	16	20.36	19.67	23.04	23.62	< 30.00
		1	1	20.51	19.86	23.21	23.79	< 30.00
		1	63	20.24	19.66	22.97	23.55	< 30.00
		64	0	20.38	19.74	23.08	23.66	< 30.00
		1	0	19.44	18.89	22.18	22.76	< 30.00
		1	64	19.11	18.58	21.86	22.44	< 30.00
25	3537.48	32	16	20.30	19.64	22.99	23.57	< 30.00
		1	1	20.45	19.83	23.16	23.74	< 30.00
		1	63	20.37	19.66	23.04	23.62	< 30.00
		64	0	20.34	19.69	23.04	23.62	< 30.00
		1	0	19.65	18.93	22.32	22.90	< 30.00
		1	64	19.21	18.56	21.91	22.49	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 256QAM								
30	3465.00	36	18	20.46	19.75	23.13	23.71	< 30.00
		1	1	20.47	19.89	23.20	23.78	< 30.00
		1	76	20.41	19.73	23.09	23.67	< 30.00
		75	0	20.56	19.82	23.22	23.80	< 30.00
		1	0	19.55	18.89	22.24	22.82	< 30.00
		1	77	19.52	18.75	22.16	22.74	< 30.00
30	3500.01	36	18	20.41	19.73	23.09	23.67	< 30.00
		1	1	20.71	20.09	23.42	24.00	< 30.00
		1	76	20.48	19.82	23.17	23.75	< 30.00
		75	0	20.47	19.83	23.17	23.75	< 30.00
		1	0	19.42	18.74	22.10	22.68	< 30.00
		1	77	19.39	18.82	22.12	22.70	< 30.00
30	3534.99	36	18	20.38	19.71	23.07	23.65	< 30.00
		1	1	20.60	20.04	23.34	23.92	< 30.00
		1	76	20.44	19.74	23.11	23.69	< 30.00
		75	0	20.41	19.81	23.13	23.71	< 30.00
		1	0	19.32	18.79	22.07	22.65	< 30.00
		1	77	19.17	18.57	21.89	22.47	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{\text{Port 0 Output Power} / 10} + 10^{\text{Port 1 Output Power} / 10}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 256QAM								
40	3470.01	50	25	20.53	19.83	23.20	23.78	< 30.00
		1	1	20.47	19.86	23.19	23.77	< 30.00
		1	104	20.28	19.79	23.05	23.63	< 30.00
		100	0	20.56	19.85	23.23	23.81	< 30.00
		1	0	19.48	18.86	22.19	22.77	< 30.00
		1	105	19.40	18.77	22.11	22.69	< 30.00
40	3500.01	50	25	20.47	19.79	23.15	23.73	< 30.00
		1	1	20.61	19.82	23.24	23.82	< 30.00
		1	104	20.35	19.73	23.06	23.64	< 30.00
		100	0	20.59	19.82	23.23	23.81	< 30.00
		1	0	19.79	19.09	22.46	23.04	< 30.00
		1	105	19.51	18.88	22.22	22.80	< 30.00
40	3529.98	50	25	20.45	19.72	23.11	23.69	< 30.00
		1	1	20.36	19.81	23.10	23.68	< 30.00
		1	104	20.39	19.68	23.06	23.64	< 30.00
		100	0	20.49	19.75	23.15	23.73	< 30.00
		1	0	19.57	19.03	22.32	22.90	< 30.00
		1	105	19.30	18.65	22.00	22.58	< 30.00
50	3475.02	64	32	20.45	19.58	23.05	23.63	< 30.00
		1	1	20.50	19.85	23.20	23.78	< 30.00
		1	131	20.30	19.49	22.92	23.50	< 30.00
		128	0	20.43	19.62	23.05	23.63	< 30.00
		1	0	19.30	18.60	21.97	22.55	< 30.00
		1	132	19.20	18.47	21.86	22.44	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 256QAM								
50	3500.01	64	32	20.39	19.44	22.95	23.53	< 30.00
		1	1	20.61	19.67	23.18	23.76	< 30.00
		1	131	20.19	19.40	22.82	23.40	< 30.00
		128	0	20.18	19.36	22.80	23.38	< 30.00
		1	0	19.72	18.75	22.27	22.85	< 30.00
		1	132	19.05	18.20	21.66	22.24	< 30.00
50	3525.00	64	32	20.32	19.50	22.94	23.52	< 30.00
		1	1	20.19	19.32	22.79	23.37	< 30.00
		1	131	20.18	19.26	22.75	23.33	< 30.00
		128	0	20.34	19.52	22.96	23.54	< 30.00
		1	0	19.26	18.53	21.92	22.50	< 30.00
		1	132	19.20	18.42	21.84	22.42	< 30.00
60	3480.00	81	40	20.33	19.42	22.91	23.49	< 30.00
		1	1	20.43	19.56	23.03	23.61	< 30.00
		1	160	20.03	19.31	22.70	23.28	< 30.00
		162	0	20.34	19.39	22.90	23.48	< 30.00
		1	0	19.36	18.55	21.98	22.56	< 30.00
		1	161	19.05	18.26	21.68	22.26	< 30.00
60	3500.01	81	40	20.29	19.36	22.86	23.44	< 30.00
		1	1	20.46	19.43	22.99	23.57	< 30.00
		1	160	20.09	19.03	22.60	23.18	< 30.00
		162	0	20.30	19.32	22.85	23.43	< 30.00
		1	0	19.37	18.50	21.97	22.55	< 30.00
		1	161	19.06	18.05	21.59	22.17	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 256QAM								
60	3519.99	81	40	20.26	19.31	22.82	23.40	< 30.00
		1	1	20.18	19.14	22.70	23.28	< 30.00
		1	160	20.13	19.18	22.69	23.27	< 30.00
		162	0	20.27	19.33	22.84	23.42	< 30.00
		1	0	19.14	18.26	21.73	22.31	< 30.00
		1	161	19.15	18.13	21.68	22.26	< 30.00
70	3485.01	90	45	20.10	19.27	22.72	23.30	< 30.00
		1	1	20.26	19.45	22.88	23.46	< 30.00
		1	187	19.59	19.03	22.33	22.91	< 30.00
		180	0	20.10	19.29	22.72	23.30	< 30.00
		1	0	19.22	18.52	21.89	22.47	< 30.00
		1	188	18.51	17.92	21.24	21.82	< 30.00
70	3500.01	90	45	20.09	19.22	22.69	23.27	< 30.00
		1	1	20.38	19.44	22.95	23.53	< 30.00
		1	187	19.66	18.81	22.27	22.85	< 30.00
		180	0	20.14	19.30	22.75	23.33	< 30.00
		1	0	19.28	18.37	21.86	22.44	< 30.00
		1	188	18.87	18.14	21.53	22.11	< 30.00
70	3514.98	90	45	20.08	19.29	22.71	23.29	< 30.00
		1	1	20.17	19.20	22.72	23.30	< 30.00
		1	187	19.73	18.77	22.29	22.87	< 30.00
		180	0	20.11	19.29	22.73	23.31	< 30.00
		1	0	19.33	18.52	21.95	22.53	< 30.00
		1	188	18.67	17.80	21.27	21.85	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 256QAM								
80	3490.02	108	54	20.21	19.34	22.81	23.39	< 30.00
		1	1	20.25	19.42	22.87	23.45	< 30.00
		1	215	20.01	19.21	22.64	23.22	< 30.00
		216	0	20.20	19.34	22.80	23.38	< 30.00
		1	0	19.41	18.58	22.03	22.61	< 30.00
		1	216	19.02	18.16	21.62	22.20	< 30.00
80	3500.01	108	54	20.19	19.35	22.80	23.38	< 30.00
		1	1	20.31	19.37	22.88	23.46	< 30.00
		1	215	19.86	19.07	22.49	23.07	< 30.00
		216	0	20.19	19.37	22.81	23.39	< 30.00
		1	0	19.19	18.35	21.80	22.38	< 30.00
		1	216	19.06	18.11	21.62	22.20	< 30.00
80	3510.00	108	54	20.10	19.21	22.69	23.27	< 30.00
		1	1	20.22	19.27	22.78	23.36	< 30.00
		1	215	19.80	18.84	22.36	22.94	< 30.00
		216	0	20.17	19.21	22.73	23.31	< 30.00
		1	0	19.25	18.31	21.82	22.40	< 30.00
		1	216	18.71	17.83	21.30	21.88	< 30.00
90	3495.00	120	60	20.19	19.34	22.80	23.38	< 30.00
		1	1	20.17	19.31	22.77	23.35	< 30.00
		1	243	19.94	19.08	22.54	23.12	< 30.00
		243	0	20.21	19.34	22.81	23.39	< 30.00
		1	0	19.09	18.34	21.74	22.32	< 30.00
		1	244	18.94	18.25	21.62	22.20	< 30.00

Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$

Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 256QAM								
90	3500.01	120	60	20.20	19.36	22.81	23.39	< 30.00
		1	1	20.40	19.47	22.97	23.55	< 30.00
		1	243	20.06	19.11	22.62	23.20	< 30.00
		243	0	20.26	19.34	22.83	23.41	< 30.00
		1	0	19.33	18.55	21.97	22.55	< 30.00
		1	244	18.89	18.02	21.49	22.07	< 30.00
90	3504.99	120	60	20.21	19.32	22.80	23.38	< 30.00
		1	1	20.49	19.53	23.05	23.63	< 30.00
		1	243	20.04	19.24	22.67	23.25	< 30.00
		243	0	20.19	19.31	22.78	23.36	< 30.00
		1	0	19.38	18.60	22.02	22.60	< 30.00
		1	244	19.02	18.25	21.66	22.24	< 30.00
100	3500.01	135	67	20.22	19.37	22.83	23.41	< 30.00
		1	1	20.27	19.45	22.89	23.47	< 30.00
		1	271	20.01	19.17	22.62	23.20	< 30.00
		270	0	20.21	19.28	22.78	23.36	< 30.00
		1	0	19.25	18.45	21.88	22.46	< 30.00
		1	272	18.98	18.20	21.62	22.20	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{\text{Port 0 Output Power} / 10} + 10^{\text{Port 1 Output Power} / 10}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM QPSK								
10	3455.01	12	6	24.41	23.58	27.03	27.61	< 30.00
		1	1	24.29	23.55	26.95	27.53	< 30.00
		1	22	24.44	23.56	27.03	27.61	< 30.00
		24	0	21.86	21.05	24.48	25.06	< 30.00
		1	0	19.46	18.64	22.08	22.66	< 30.00
		1	23	19.36	18.74	22.07	22.65	< 30.00
10	3500.01	12	6	24.27	23.52	26.92	27.50	< 30.00
		1	1	24.37	23.67	27.04	27.62	< 30.00
		1	22	24.46	23.70	27.11	27.69	< 30.00
		24	0	21.88	21.07	24.50	25.08	< 30.00
		1	0	19.28	18.56	21.95	22.53	< 30.00
		1	23	19.40	18.77	22.11	22.69	< 30.00
10	3544.98	12	6	24.47	23.57	27.05	27.63	< 30.00
		1	1	24.38	23.50	26.97	27.55	< 30.00
		1	22	24.41	23.50	26.99	27.57	< 30.00
		24	0	21.85	20.91	24.42	25.00	< 30.00
		1	0	19.47	18.61	22.07	22.65	< 30.00
		1	23	19.39	18.56	22.01	22.59	< 30.00
15	3457.50	19	9	24.47	23.60	27.07	27.65	< 30.00
		1	1	24.43	23.62	27.05	27.63	< 30.00
		1	36	24.71	23.90	27.33	27.91	< 30.00
		38	0	22.05	21.11	24.62	25.20	< 30.00
		1	0	19.57	18.82	22.22	22.80	< 30.00
		1	37	19.85	18.68	22.31	22.89	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM QPSK								
15	3500.01	19	9	24.43	23.55	27.02	27.60	< 30.00
		1	1	24.39	23.81	27.12	27.70	< 30.00
		1	36	24.37	23.53	26.98	27.56	< 30.00
		38	0	21.93	21.12	24.55	25.13	< 30.00
		1	0	19.63	18.77	22.23	22.81	< 30.00
		1	37	19.45	18.68	22.09	22.67	< 30.00
15	3542.49	19	9	24.47	23.48	27.01	27.59	< 30.00
		1	1	24.70	23.66	27.22	27.80	< 30.00
		1	36	24.63	23.59	27.15	27.73	< 30.00
		38	0	21.96	21.08	24.55	25.13	< 30.00
		1	0	19.55	18.78	22.19	22.77	< 30.00
		1	37	19.60	18.67	22.17	22.75	< 30.00
20	3460.02	25	12	24.56	23.73	27.18	27.76	< 30.00
		1	1	24.59	23.67	27.16	27.74	< 30.00
		1	49	24.47	23.70	27.11	27.69	< 30.00
		51	0	22.13	21.11	24.66	25.24	< 30.00
		1	0	19.52	18.68	22.13	22.71	< 30.00
		1	50	19.68	18.60	22.18	22.76	< 30.00
20	3500.01	25	12	24.43	23.56	27.03	27.61	< 30.00
		1	1	24.54	23.57	27.09	27.67	< 30.00
		1	49	24.57	23.63	27.14	27.72	< 30.00
		51	0	21.95	21.11	24.56	25.14	< 30.00
		1	0	19.72	18.90	22.34	22.92	< 30.00
		1	50	19.66	18.87	22.29	22.87	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM QPSK								
20	3540.00	25	12	24.47	23.60	27.07	27.65	< 30.00
		1	1	24.49	23.65	27.10	27.68	< 30.00
		1	49	24.56	23.58	27.11	27.69	< 30.00
		51	0	21.99	21.13	24.59	25.17	< 30.00
		1	0	19.56	18.80	22.21	22.79	< 30.00
		1	50	19.56	18.59	22.11	22.69	< 30.00
25	3462.51	33	16	24.51	23.73	27.15	27.73	< 30.00
		1	1	24.60	23.98	27.31	27.89	< 30.00
		1	63	24.43	23.54	27.02	27.60	< 30.00
		65	0	21.97	21.32	24.67	25.25	< 30.00
		1	0	19.68	18.85	22.30	22.88	< 30.00
		1	64	19.57	18.72	22.18	22.76	< 30.00
25	3500.01	33	16	24.39	23.75	27.09	27.67	< 30.00
		1	1	24.62	23.83	27.25	27.83	< 30.00
		1	63	23.80	23.59	26.71	27.29	< 30.00
		65	0	21.91	21.24	24.60	25.18	< 30.00
		1	0	19.67	19.00	22.36	22.94	< 30.00
		1	64	19.38	18.68	22.05	22.63	< 30.00
25	3537.48	33	16	24.37	23.69	27.05	27.63	< 30.00
		1	1	24.57	23.82	27.22	27.80	< 30.00
		1	63	24.29	23.71	27.02	27.60	< 30.00
		65	0	21.92	21.25	24.61	25.19	< 30.00
		1	0	19.68	18.97	22.35	22.93	< 30.00
		1	64	19.46	18.73	22.12	22.70	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM QPSK								
30	3465.00	39	19	24.59	23.68	27.17	27.75	< 30.00
		1	1	24.76	23.91	27.37	27.95	< 30.00
		1	76	24.59	23.57	27.12	27.70	< 30.00
		78	0	22.08	21.25	24.70	25.28	< 30.00
		1	0	19.60	18.89	22.27	22.85	< 30.00
		1	77	19.71	18.92	22.34	22.92	< 30.00
30	3500.01	39	19	24.43	23.63	27.06	27.64	< 30.00
		1	1	24.69	24.01	27.37	27.95	< 30.00
		1	76	24.70	24.02	27.38	27.96	< 30.00
		78	0	22.02	21.23	24.65	25.23	< 30.00
		1	0	19.74	19.09	22.44	23.02	< 30.00
		1	77	19.52	18.75	22.16	22.74	< 30.00
30	3534.99	39	19	24.43	23.72	27.10	27.68	< 30.00
		1	1	24.66	24.02	27.36	27.94	< 30.00
		1	76	24.48	23.77	27.15	27.73	< 30.00
		78	0	22.03	21.27	24.68	25.26	< 30.00
		1	0	19.70	19.08	22.41	22.99	< 30.00
		1	77	19.61	18.78	22.23	22.81	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{\text{Port 0 Output Power} / 10} + 10^{\text{Port 1 Output Power} / 10}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM QPSK								
40	3470.01	53	26	24.56	23.75	27.18	27.76	< 30.00
		1	1	24.68	24.01	27.37	27.95	< 30.00
		1	104	24.58	23.77	27.20	27.78	< 30.00
		106	0	22.08	21.30	24.72	25.30	< 30.00
		1	0	19.74	19.09	22.44	23.02	< 30.00
		1	105	19.58	18.86	22.25	22.83	< 30.00
40	3500.01	53	26	24.42	23.71	27.09	27.67	< 30.00
		1	1	24.90	24.06	27.51	28.09	< 30.00
		1	104	24.54	23.80	27.20	27.78	< 30.00
		106	0	22.04	21.31	24.70	25.28	< 30.00
		1	0	19.77	18.02	21.99	22.57	< 30.00
		1	105	19.52	18.86	22.21	22.79	< 30.00
40	3529.98	53	26	24.41	23.62	27.04	27.62	< 30.00
		1	1	24.47	23.82	27.17	27.75	< 30.00
		1	104	24.54	23.83	27.21	27.79	< 30.00
		106	0	21.93	21.23	24.60	25.18	< 30.00
		1	0	19.55	19.07	22.33	22.91	< 30.00
		1	105	19.51	18.72	22.14	22.72	< 30.00
50	3475.02	67	33	24.23	23.45	26.87	27.45	< 30.00
		1	1	24.48	23.71	27.12	27.70	< 30.00
		1	131	24.14	23.40	26.80	27.38	< 30.00
		133	0	21.90	21.01	24.49	25.07	< 30.00
		1	0	19.55	18.85	22.22	22.80	< 30.00
		1	132	19.25	18.38	21.85	22.43	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM QPSK								
50	3500.01	67	33	24.31	23.45	26.91	27.49	< 30.00
		1	1	24.62	23.66	27.18	27.76	< 30.00
		1	131	24.22	23.24	26.77	27.35	< 30.00
		133	0	21.92	21.08	24.53	25.11	< 30.00
		1	0	19.67	18.66	22.20	22.78	< 30.00
		1	132	19.31	18.24	21.82	22.40	< 30.00
50	3525.00	67	33	24.29	23.34	26.85	27.43	< 30.00
		1	1	24.41	23.47	26.98	27.56	< 30.00
		1	131	24.34	23.31	26.87	27.45	< 30.00
		133	0	21.85	20.94	24.43	25.01	< 30.00
		1	0	19.51	18.69	22.13	22.71	< 30.00
		1	132	19.23	18.28	21.79	22.37	< 30.00
60	3480.00	81	40	24.43	23.46	26.98	27.56	< 30.00
		1	1	24.49	23.64	27.10	27.68	< 30.00
		1	160	24.26	23.35	26.84	27.42	< 30.00
		162	0	21.98	21.02	24.54	25.12	< 30.00
		1	0	19.54	18.58	22.10	22.68	< 30.00
		1	161	19.25	18.43	21.87	22.45	< 30.00
60	3500.01	81	40	24.38	23.44	26.95	27.53	< 30.00
		1	1	24.55	23.57	27.10	27.68	< 30.00
		1	160	24.38	23.38	26.92	27.50	< 30.00
		162	0	21.98	21.08	24.56	25.14	< 30.00
		1	0	19.63	18.78	22.24	22.82	< 30.00
		1	161	19.39	18.46	21.96	22.54	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM QPSK								
60	3519.99	81	40	24.38	24.32	27.36	27.94	< 30.00
		1	1	24.54	23.56	27.09	27.67	< 30.00
		1	160	24.30	23.33	26.85	27.43	< 30.00
		162	0	21.95	20.94	24.48	25.06	< 30.00
		1	0	19.76	18.70	22.27	22.85	< 30.00
		1	161	19.31	18.37	21.88	22.46	< 30.00
70	3485.01	95	47	24.23	23.40	26.85	27.43	< 30.00
		1	1	24.41	23.54	27.01	27.59	< 30.00
		1	187	24.13	23.19	26.70	27.28	< 30.00
		189	0	21.76	20.89	24.36	24.94	< 30.00
		1	0	19.36	18.70	22.05	22.63	< 30.00
		1	188	19.01	18.18	21.63	22.21	< 30.00
70	3500.01	95	47	24.17	23.31	26.77	27.35	< 30.00
		1	1	24.38	23.59	27.01	27.59	< 30.00
		1	187	24.22	23.40	26.84	27.42	< 30.00
		189	0	21.74	20.94	24.37	24.95	< 30.00
		1	0	19.62	18.55	22.13	22.71	< 30.00
		1	188	19.18	18.29	21.77	22.35	< 30.00
70	3514.98	95	47	24.22	23.40	26.84	27.42	< 30.00
		1	1	24.54	23.48	27.05	27.63	< 30.00
		1	187	24.25	23.27	26.80	27.38	< 30.00
		189	0	21.79	20.91	24.38	24.96	< 30.00
		1	0	19.59	18.67	22.16	22.74	< 30.00
		1	188	19.22	18.16	21.73	22.31	< 30.00

Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$

Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM QPSK								
80	3490.02	109	54	24.19	23.38	26.81	27.39	< 30.00
		1	1	24.46	23.39	26.97	27.55	< 30.00
		1	215	24.18	23.27	26.76	27.34	< 30.00
		217	0	21.63	20.94	24.31	24.89	< 30.00
		1	0	19.32	18.72	22.04	22.62	< 30.00
		1	216	19.02	18.27	21.67	22.25	< 30.00
80	3500.01	109	54	24.22	23.36	26.82	27.40	< 30.00
		1	1	24.50	23.53	27.05	27.63	< 30.00
		1	215	24.06	23.34	26.73	27.31	< 30.00
		217	0	21.67	20.90	24.31	24.89	< 30.00
		1	0	19.51	18.74	22.15	22.73	< 30.00
		1	216	19.01	18.21	21.64	22.22	< 30.00
80	3510.00	109	54	24.08	23.28	26.71	27.29	< 30.00
		1	1	24.48	23.50	27.03	27.61	< 30.00
		1	215	24.17	23.26	26.75	27.33	< 30.00
		217	0	21.77	20.84	24.34	24.92	< 30.00
		1	0	19.42	18.52	22.00	22.58	< 30.00
		1	216	19.13	18.12	21.66	22.24	< 30.00
90	3495.00	123	61	24.10	23.34	26.75	27.33	< 30.00
		1	1	24.47	23.65	27.09	27.67	< 30.00
		1	243	24.05	23.30	26.70	27.28	< 30.00
		245	0	21.64	20.89	24.29	24.87	< 30.00
		1	0	19.33	18.70	22.04	22.62	< 30.00
		1	244	19.07	18.32	21.72	22.30	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM QPSK								
90	3500.01	123	61	24.19	23.22	26.74	27.32	< 30.00
		1	1	24.25	23.52	26.91	27.49	< 30.00
		1	243	23.97	23.26	26.64	27.22	< 30.00
		245	0	21.67	20.90	24.31	24.89	< 30.00
		1	0	19.37	18.71	22.06	22.64	< 30.00
		1	244	19.14	18.25	21.73	22.31	< 30.00
90	3504.99	123	61	24.14	23.37	26.78	27.36	< 30.00
		1	1	24.53	23.46	27.04	27.62	< 30.00
		1	243	23.91	23.18	26.57	27.15	< 30.00
		245	0	21.76	20.89	24.36	24.94	< 30.00
		1	0	19.54	18.62	22.11	22.69	< 30.00
		1	244	19.20	18.26	21.77	22.35	< 30.00
100	3500.01	137	68	24.15	23.21	26.72	27.30	< 30.00
		1	1	24.32	23.36	26.88	27.46	< 30.00
		1	271	24.03	23.15	26.62	27.20	< 30.00
		273	0	21.75	20.81	24.32	24.90	< 30.00
		1	0	19.47	18.60	22.07	22.65	< 30.00
		1	272	19.01	18.19	21.63	22.21	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{\text{Port 0 Output Power} / 10} + 10^{\text{Port 1 Output Power} / 10}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Test Site	WZ-SR6	Test Engineer	Cloud Guo
Test Date	2023/04/03 ~ 2023/04/08 2023/05/10 ~ 2023/05/12	Test Band	n77/n78_UL MIMO (3700 ~ 3980MHz)

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM PI/2 BPSK								
10	3705.00	12	6	25.70	25.03	28.39	28.97	< 30.00
		1	1	25.63	24.82	28.25	28.83	< 30.00
		1	22	25.66	24.97	28.34	28.92	< 30.00
		24	0	24.21	23.42	26.84	27.42	< 30.00
		1	0	19.62	18.91	22.29	22.87	< 30.00
		1	23	19.66	19.02	22.36	22.94	< 30.00
10	3840.00	12	6	25.40	25.01	28.22	28.80	< 30.00
		1	1	25.38	24.92	28.17	28.75	< 30.00
		1	22	25.33	24.90	28.13	28.71	< 30.00
		24	0	23.88	23.49	26.70	27.28	< 30.00
		1	0	19.42	18.95	22.20	22.78	< 30.00
		1	23	19.42	18.89	22.17	22.75	< 30.00
10	3975.00	12	6	25.76	25.01	28.41	28.99	< 30.00
		1	1	25.77	24.94	28.39	28.97	< 30.00
		1	22	25.73	25.04	28.41	28.99	< 30.00
		24	0	24.26	23.59	26.95	27.53	< 30.00
		1	0	19.73	19.01	22.40	22.98	< 30.00
		1	23	19.65	18.95	22.32	22.90	< 30.00
15	3707.52	18	9	25.61	24.76	28.22	28.80	< 30.00
		1	1	25.49	24.73	28.14	28.72	< 30.00
		1	36	25.61	24.78	28.23	28.81	< 30.00
		36	0	24.02	23.27	26.67	27.25	< 30.00
		1	0	19.63	18.73	22.21	22.79	< 30.00
		1	37	19.57	18.87	22.24	22.82	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{\text{Port 0 Output Power} / 10} + 10^{\text{Port 1 Output Power} / 10}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM PI/2 BPSK								
15	3840.00	18	9	25.68	25.23	28.47	29.05	< 30.00
		1	1	25.60	25.19	28.41	28.99	< 30.00
		1	36	25.74	25.24	28.51	29.09	< 30.00
		36	0	24.21	23.74	26.99	27.57	< 30.00
		1	0	19.74	19.25	22.51	23.09	< 30.00
		1	37	19.68	19.20	22.46	23.04	< 30.00
15	3972.48	18	9	25.94	25.08	28.54	29.12	< 30.00
		1	1	25.87	25.10	28.51	29.09	< 30.00
		1	36	25.91	25.09	28.53	29.11	< 30.00
		36	0	24.42	23.61	27.04	27.62	< 30.00
		1	0	19.89	19.07	22.51	23.09	< 30.00
		1	37	19.91	19.05	22.51	23.09	< 30.00
20	3710.01	25	12	25.64	24.80	28.25	28.83	< 30.00
		1	1	25.59	24.73	28.19	28.77	< 30.00
		1	49	25.62	24.88	28.28	28.86	< 30.00
		50	0	24.13	23.32	26.75	27.33	< 30.00
		1	0	19.56	18.73	22.18	22.76	< 30.00
		1	50	19.60	18.91	22.28	22.86	< 30.00
20	3840.00	25	12	25.82	25.33	28.59	29.17	< 30.00
		1	1	25.65	25.22	28.45	29.03	< 30.00
		1	49	25.74	25.29	28.53	29.11	< 30.00
		50	0	24.28	23.86	27.09	27.67	< 30.00
		1	0	19.77	19.31	22.56	23.14	< 30.00
		1	50	19.76	19.24	22.52	23.10	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM PI/2 BPSK								
20	3969.99	25	12	25.93	25.20	28.59	29.17	< 30.00
		1	1	25.93	25.12	28.55	29.13	< 30.00
		1	49	25.98	25.18	28.61	29.19	< 30.00
		50	0	24.50	23.70	27.13	27.71	< 30.00
		1	0	19.98	19.12	22.58	23.16	< 30.00
		1	50	19.96	19.17	22.59	23.17	< 30.00
25	3712.50	32	16	25.83	25.23	28.55	29.13	< 30.00
		1	1	25.65	25.13	28.41	28.99	< 30.00
		1	63	25.67	25.35	28.52	29.10	< 30.00
		64	0	24.21	23.69	26.97	27.55	< 30.00
		1	0	19.81	19.12	22.49	23.07	< 30.00
		1	64	19.68	19.33	22.52	23.10	< 30.00
25	3840.00	32	16	25.91	25.65	28.79	29.37	< 30.00
		1	1	25.77	25.59	28.69	29.27	< 30.00
		1	63	25.96	25.57	28.78	29.36	< 30.00
		64	0	24.44	24.20	27.33	27.91	< 30.00
		1	0	19.93	19.73	22.84	23.42	< 30.00
		1	64	19.91	19.61	22.77	23.35	< 30.00
25	3967.50	32	16	26.15	25.58	28.88	29.46	< 30.00
		1	1	26.14	25.52	28.85	29.43	< 30.00
		1	63	25.99	25.62	28.82	29.40	< 30.00
		64	0	24.61	24.07	27.36	27.94	< 30.00
		1	0	20.23	19.53	22.90	23.48	< 30.00
		1	64	20.06	19.65	22.87	23.45	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM PI/2 BPSK								
30	3715.02	36	18	25.74	24.87	28.34	28.92	< 30.00
		1	1	25.60	24.84	28.25	28.83	< 30.00
		1	76	25.72	25.07	28.42	29.00	< 30.00
		75	0	24.25	23.45	26.88	27.46	< 30.00
		1	0	19.74	18.85	22.33	22.91	< 30.00
		1	77	19.76	19.08	22.44	23.02	< 30.00
30	3840.00	36	18	25.78	25.36	28.59	29.17	< 30.00
		1	1	25.73	25.30	28.53	29.11	< 30.00
		1	76	25.74	25.28	28.53	29.11	< 30.00
		75	0	24.32	23.88	27.12	27.70	< 30.00
		1	0	19.82	19.40	22.63	23.21	< 30.00
		1	77	19.79	19.28	22.55	23.13	< 30.00
30	3964.98	36	18	25.93	25.20	28.59	29.17	< 30.00
		1	1	26.00	25.13	28.60	29.18	< 30.00
		1	76	25.92	25.22	28.59	29.17	< 30.00
		75	0	24.48	23.75	27.14	27.72	< 30.00
		1	0	20.02	19.25	22.66	23.24	< 30.00
		1	77	19.95	19.20	22.60	23.18	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{\text{Port 0 Output Power} / 10} + 10^{\text{Port 1 Output Power} / 10}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM PI/2 BPSK								
40	3720.00	50	25	25.36	24.60	28.01	28.59	< 30.00
		1	1	25.45	24.58	28.05	28.63	< 30.00
		1	104	25.46	24.76	28.13	28.71	< 30.00
		100	0	23.98	23.19	26.61	27.19	< 30.00
		1	0	19.55	18.75	22.18	22.76	< 30.00
		1	105	19.55	18.82	22.21	22.79	< 30.00
40	3840.00	50	25	25.63	25.12	28.39	28.97	< 30.00
		1	1	25.63	25.29	28.47	29.05	< 30.00
		1	104	25.53	25.09	28.33	28.91	< 30.00
		100	0	24.10	23.68	26.91	27.49	< 30.00
		1	0	19.77	19.41	22.60	23.18	< 30.00
		1	105	19.61	19.23	22.43	23.01	< 30.00
40	3960.00	50	25	25.91	25.14	28.55	29.13	< 30.00
		1	1	26.01	25.16	28.62	29.20	< 30.00
		1	104	25.95	25.27	28.63	29.21	< 30.00
		100	0	24.42	23.62	27.05	27.63	< 30.00
		1	0	20.08	19.18	22.66	23.24	< 30.00
		1	105	19.90	19.23	22.59	23.17	< 30.00
50	3720.00	64	32	25.72	24.98	28.38	28.96	< 30.00
		1	1	25.54	24.75	28.17	28.75	< 30.00
		1	131	25.62	24.94	28.30	28.88	< 30.00
		128	0	24.16	23.42	26.82	27.40	< 30.00
		1	0	19.54	18.71	22.16	22.74	< 30.00
		1	132	19.37	18.71	22.06	22.64	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM PI/2 BPSK								
50	3840.00	64	32	25.60	25.23	28.43	29.01	< 30.00
		1	1	25.51	25.13	28.33	28.91	< 30.00
		1	131	25.47	25.02	28.26	28.84	< 30.00
		128	0	24.04	23.65	26.86	27.44	< 30.00
		1	0	19.61	19.27	22.45	23.03	< 30.00
		1	132	19.58	19.13	22.37	22.95	< 30.00
50	3954.99	64	32	25.78	24.98	28.41	28.99	< 30.00
		1	1	25.94	24.92	28.47	29.05	< 30.00
		1	131	25.65	25.02	28.36	28.94	< 30.00
		128	0	24.30	23.59	26.97	27.55	< 30.00
		1	0	19.90	18.99	22.48	23.06	< 30.00
		1	132	19.68	19.03	22.38	22.96	< 30.00
60	3730.02	81	40	25.43	24.72	28.10	28.68	< 30.00
		1	1	25.30	24.51	27.93	28.51	< 30.00
		1	160	25.36	24.74	28.07	28.65	< 30.00
		162	0	23.96	23.23	26.62	27.20	< 30.00
		1	0	19.47	18.67	22.10	22.68	< 30.00
		1	161	19.44	18.74	22.11	22.69	< 30.00
60	3840.00	81	40	25.65	25.23	28.46	29.04	< 30.00
		1	1	25.55	25.20	28.39	28.97	< 30.00
		1	160	25.49	25.08	28.30	28.88	< 30.00
		162	0	24.16	23.77	26.98	27.56	< 30.00
		1	0	19.62	19.30	22.47	23.05	< 30.00
		1	161	19.58	19.13	22.37	22.95	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM PI/2 BPSK								
60	3949.98	81	40	25.55	25.04	28.31	28.89	< 30.00
		1	1	25.78	25.10	28.46	29.04	< 30.00
		1	160	25.47	25.05	28.28	28.86	< 30.00
		162	0	24.12	23.60	26.88	27.46	< 30.00
		1	0	19.76	19.07	22.44	23.02	< 30.00
		1	161	19.37	19.07	22.23	22.81	< 30.00
70	3735.00	90	45	25.54	24.84	28.21	28.79	< 30.00
		1	1	25.35	24.62	28.01	28.59	< 30.00
		1	187	25.38	24.76	28.09	28.67	< 30.00
		180	0	23.94	23.32	26.65	27.23	< 30.00
		1	0	19.60	18.74	22.20	22.78	< 30.00
		1	188	19.35	18.73	22.06	22.64	< 30.00
70	3840.00	90	45	25.56	25.07	28.33	28.91	< 30.00
		1	1	25.45	25.12	28.30	28.88	< 30.00
		1	187	25.31	24.84	28.09	28.67	< 30.00
		180	0	23.95	23.68	26.83	27.41	< 30.00
		1	0	19.46	19.36	22.42	23.00	< 30.00
		1	188	19.29	18.97	22.14	22.72	< 30.00
70	3945.00	90	45	25.69	25.10	28.42	29.00	< 30.00
		1	1	25.82	25.02	28.45	29.03	< 30.00
		1	187	25.34	25.01	28.19	28.77	< 30.00
		180	0	24.10	23.63	26.88	27.46	< 30.00
		1	0	19.84	19.16	22.52	23.10	< 30.00
		1	188	19.37	19.06	22.23	22.81	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM PI/2 BPSK								
80	3740.01	108	54	25.55	24.91	28.25	28.83	< 30.00
		1	1	25.33	24.56	27.97	28.55	< 30.00
		1	215	25.41	24.77	28.11	28.69	< 30.00
		216	0	24.01	23.25	26.66	27.24	< 30.00
		1	0	19.52	18.67	22.13	22.71	< 30.00
		1	216	19.37	18.71	22.06	22.64	< 30.00
80	3840.00	108	54	25.51	25.08	28.31	28.89	< 30.00
		1	1	25.40	25.11	28.27	28.85	< 30.00
		1	215	25.44	24.97	28.22	28.80	< 30.00
		216	0	24.03	23.61	26.84	27.42	< 30.00
		1	0	19.52	19.20	22.37	22.95	< 30.00
		1	216	19.43	18.94	22.20	22.78	< 30.00
80	3939.99	108	54	25.57	25.09	28.35	28.93	< 30.00
		1	1	25.73	25.01	28.40	28.98	< 30.00
		1	215	25.33	25.04	28.20	28.78	< 30.00
		216	0	24.19	23.58	26.91	27.49	< 30.00
		1	0	19.79	19.14	22.49	23.07	< 30.00
		1	216	19.26	19.04	22.16	22.74	< 30.00
90	3745.02	120	60	25.56	24.89	28.25	28.83	< 30.00
		1	1	25.26	24.58	27.94	28.52	< 30.00
		1	243	25.53	24.82	28.20	28.78	< 30.00
		243	0	24.03	23.29	26.69	27.27	< 30.00
		1	0	19.62	18.88	22.28	22.86	< 30.00
		1	244	19.52	18.86	22.21	22.79	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM PI/2 BPSK								
90	3840.00	120	60	25.49	25.09	28.30	28.88	< 30.00
		1	1	25.30	25.04	28.18	28.76	< 30.00
		1	243	25.54	24.96	28.27	28.85	< 30.00
		243	0	24.07	23.72	26.91	27.49	< 30.00
		1	0	19.42	19.23	22.34	22.92	< 30.00
		1	244	19.53	19.01	22.29	22.87	< 30.00
90	3934.98	120	60	25.72	25.07	28.42	29.00	< 30.00
		1	1	25.71	24.99	28.38	28.96	< 30.00
		1	243	25.35	25.02	28.20	28.78	< 30.00
		243	0	24.15	23.61	26.90	27.48	< 30.00
		1	0	19.88	19.14	22.54	23.12	< 30.00
		1	244	19.40	19.07	22.25	22.83	< 30.00
100	3750.00	135	67	25.59	24.91	28.27	28.85	< 30.00
		1	1	25.28	24.59	27.96	28.54	< 30.00
		1	271	25.64	24.95	28.32	28.90	< 30.00
		270	0	24.07	23.31	26.72	27.30	< 30.00
		1	0	19.57	18.82	22.22	22.80	< 30.00
		1	272	19.59	18.89	22.26	22.84	< 30.00
100	3840.00	135	67	25.59	25.16	28.39	28.97	< 30.00
		1	1	25.36	25.09	28.24	28.82	< 30.00
		1	271	25.52	25.03	28.29	28.87	< 30.00
		270	0	24.03	23.60	26.83	27.41	< 30.00
		1	0	19.40	19.13	22.28	22.86	< 30.00
		1	272	19.52	18.99	22.27	22.85	< 30.00
100	3930.00	135	67	25.69	25.14	28.43	29.01	< 30.00
		1	1	25.71	25.03	28.39	28.97	< 30.00
		1	271	25.41	25.22	28.33	28.91	< 30.00
		270	0	24.21	23.58	26.92	27.50	< 30.00
		1	0	19.90	19.08	22.52	23.10	< 30.00
		1	272	19.41	19.16	22.30	22.88	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{\text{Port 0 Output Power} / 10} + 10^{\text{Port 1 Output Power} / 10}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM QPSK								
10	3705.00	12	6	25.73	24.94	28.36	28.94	< 30.00
		1	1	25.60	24.84	28.25	28.83	< 30.00
		1	22	25.62	24.99	28.33	28.91	< 30.00
		24	0	23.74	22.90	26.35	26.93	< 30.00
		1	0	19.18	18.46	21.85	22.43	< 30.00
		1	23	19.17	18.50	21.86	22.44	< 30.00
10	3840.00	12	6	25.40	24.93	28.18	28.76	< 30.00
		1	1	25.35	24.91	28.15	28.73	< 30.00
		1	22	25.36	24.89	28.14	28.72	< 30.00
		24	0	23.39	22.97	26.20	26.78	< 30.00
		1	0	18.88	18.42	21.67	22.25	< 30.00
		1	23	18.95	18.36	21.68	22.26	< 30.00
10	3975.00	12	6	25.74	25.04	28.41	28.99	< 30.00
		1	1	25.71	24.89	28.33	28.91	< 30.00
		1	22	25.63	25.02	28.35	28.93	< 30.00
		24	0	23.74	23.09	26.44	27.02	< 30.00
		1	0	19.21	18.45	21.86	22.44	< 30.00
		1	23	19.13	18.39	21.79	22.37	< 30.00
15	3707.52	18	9	25.55	24.74	28.17	28.75	< 30.00
		1	1	25.48	24.74	28.14	28.72	< 30.00
		1	36	25.62	24.80	28.24	28.82	< 30.00
		36	0	23.50	22.75	26.15	26.73	< 30.00
		1	0	19.09	18.22	21.69	22.27	< 30.00
		1	37	19.05	18.36	21.73	22.31	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM QPSK								
15	3840.00	18	9	25.67	25.17	28.44	29.02	< 30.00
		1	1	25.58	25.18	28.39	28.97	< 30.00
		1	36	25.71	25.25	28.50	29.08	< 30.00
		36	0	23.76	23.28	26.54	27.12	< 30.00
		1	0	19.09	18.64	21.88	22.46	< 30.00
		1	37	19.12	18.64	21.90	22.48	< 30.00
15	3972.48	18	9	25.87	25.08	28.50	29.08	< 30.00
		1	1	25.82	25.04	28.46	29.04	< 30.00
		1	36	25.78	25.11	28.47	29.05	< 30.00
		36	0	23.91	23.11	26.54	27.12	< 30.00
		1	0	19.38	18.53	21.99	22.57	< 30.00
		1	37	19.41	18.60	22.03	22.61	< 30.00
20	3710.01	25	12	25.61	24.82	28.24	28.82	< 30.00
		1	1	25.57	24.67	28.15	28.73	< 30.00
		1	49	25.64	24.91	28.30	28.88	< 30.00
		50	0	23.69	22.79	26.27	26.85	< 30.00
		1	0	19.09	18.33	21.74	22.32	< 30.00
		1	50	19.11	18.41	21.78	22.36	< 30.00
20	3840.00	25	12	25.75	25.31	28.55	29.13	< 30.00
		1	1	25.78	25.30	28.56	29.14	< 30.00
		1	49	25.75	25.25	28.52	29.10	< 30.00
		50	0	23.75	23.29	26.54	27.12	< 30.00
		1	0	19.24	18.78	22.03	22.61	< 30.00
		1	50	19.20	18.69	21.96	22.54	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM QPSK								
20	3969.99	25	12	25.91	25.22	28.59	29.17	< 30.00
		1	1	25.94	25.06	28.53	29.11	< 30.00
		1	49	25.88	25.23	28.58	29.16	< 30.00
		50	0	23.93	23.26	26.62	27.20	< 30.00
		1	0	19.42	18.63	22.05	22.63	< 30.00
		1	50	19.36	18.70	22.05	22.63	< 30.00
25	3712.50	32	16	25.62	25.28	28.46	29.04	< 30.00
		1	1	25.65	25.12	28.40	28.98	< 30.00
		1	63	25.63	25.37	28.51	29.09	< 30.00
		64	0	23.71	23.24	26.49	27.07	< 30.00
		1	0	19.24	18.66	21.97	22.55	< 30.00
		1	64	19.04	18.81	21.94	22.52	< 30.00
25	3840.00	32	16	25.91	25.65	28.79	29.37	< 30.00
		1	1	25.69	25.65	28.68	29.26	< 30.00
		1	63	25.85	25.61	28.74	29.32	< 30.00
		64	0	23.93	23.67	26.81	27.39	< 30.00
		1	0	20.31	19.17	22.79	23.37	< 30.00
		1	64	19.35	19.06	22.22	22.80	< 30.00
25	3967.50	32	16	26.09	25.51	28.82	29.40	< 30.00
		1	1	26.17	25.57	28.89	29.47	< 30.00
		1	63	26.01	25.72	28.88	29.46	< 30.00
		64	0	24.08	23.54	26.83	27.41	< 30.00
		1	0	19.60	19.00	22.32	22.90	< 30.00
		1	64	19.59	19.04	22.33	22.91	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM QPSK								
30	3715.02	36	18	25.70	24.91	28.33	28.91	< 30.00
		1	1	25.59	24.83	28.24	28.82	< 30.00
		1	76	25.78	25.04	28.44	29.02	< 30.00
		75	0	23.76	22.93	26.38	26.96	< 30.00
		1	0	19.31	18.41	21.89	22.47	< 30.00
		1	77	19.31	18.60	21.98	22.56	< 30.00
30	3840.00	36	18	25.74	25.34	28.55	29.13	< 30.00
		1	1	25.72	25.28	28.52	29.10	< 30.00
		1	76	25.71	25.23	28.49	29.07	< 30.00
		75	0	23.81	23.35	26.60	27.18	< 30.00
		1	0	19.27	18.90	22.10	22.68	< 30.00
		1	77	19.22	18.68	21.97	22.55	< 30.00
30	3964.98	36	18	25.92	25.17	28.57	29.15	< 30.00
		1	1	26.01	25.14	28.61	29.19	< 30.00
		1	76	25.90	25.16	28.56	29.14	< 30.00
		75	0	23.95	23.22	26.61	27.19	< 30.00
		1	0	19.44	18.67	22.08	22.66	< 30.00
		1	77	19.43	18.65	22.07	22.65	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{\text{Port 0 Output Power} / 10} + 10^{\text{Port 1 Output Power} / 10}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM QPSK								
40	3720.00	50	25	25.33	24.53	27.96	28.54	< 30.00
		1	1	25.44	24.55	28.03	28.61	< 30.00
		1	104	25.47	24.72	28.12	28.70	< 30.00
		100	0	23.48	22.69	26.11	26.69	< 30.00
		1	0	19.05	18.25	21.68	22.26	< 30.00
		1	105	19.06	18.30	21.71	22.29	< 30.00
40	3840.00	50	25	25.58	25.12	28.37	28.95	< 30.00
		1	1	25.67	25.23	28.47	29.05	< 30.00
		1	104	25.54	25.09	28.33	28.91	< 30.00
		100	0	23.63	23.17	26.42	27.00	< 30.00
		1	0	19.24	18.85	22.06	22.64	< 30.00
		1	105	19.11	18.64	21.89	22.47	< 30.00
40	3960.00	50	25	25.79	25.13	28.48	29.06	< 30.00
		1	1	25.97	25.12	28.58	29.16	< 30.00
		1	104	25.89	25.26	28.60	29.18	< 30.00
		100	0	23.90	23.16	26.56	27.14	< 30.00
		1	0	19.50	18.63	22.10	22.68	< 30.00
		1	105	19.42	18.68	22.08	22.66	< 30.00
50	3720.00	64	32	25.70	24.95	28.35	28.93	< 30.00
		1	1	25.53	24.75	28.17	28.75	< 30.00
		1	131	25.62	24.95	28.31	28.89	< 30.00
		128	0	23.67	22.94	26.33	26.91	< 30.00
		1	0	18.98	18.13	21.59	22.17	< 30.00
		1	132	18.81	18.17	21.51	22.09	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM QPSK								
50	3840.00	64	32	25.56	25.18	28.38	28.96	< 30.00
		1	1	25.57	25.12	28.36	28.94	< 30.00
		1	131	25.42	25.06	28.25	28.83	< 30.00
		128	0	23.52	23.14	26.34	26.92	< 30.00
		1	0	19.04	18.67	21.87	22.45	< 30.00
		1	132	19.04	18.61	21.84	22.42	< 30.00
50	3954.99	64	32	25.80	24.98	28.42	29.00	< 30.00
		1	1	25.77	24.92	28.38	28.96	< 30.00
		1	131	25.61	25.03	28.34	28.92	< 30.00
		128	0	23.73	23.11	26.44	27.02	< 30.00
		1	0	19.34	18.37	21.89	22.47	< 30.00
		1	132	19.12	18.49	21.83	22.41	< 30.00
60	3730.02	81	40	25.40	24.73	28.09	28.67	< 30.00
		1	1	23.34	24.49	26.96	27.54	< 30.00
		1	160	25.37	24.72	28.07	28.65	< 30.00
		162	0	23.44	22.73	26.11	26.69	< 30.00
		1	0	18.98	18.17	21.60	22.18	< 30.00
		1	161	18.82	18.20	21.53	22.11	< 30.00
60	3840.00	81	40	25.62	25.19	28.42	29.00	< 30.00
		1	1	25.54	25.16	28.36	28.94	< 30.00
		1	160	25.51	25.06	28.30	28.88	< 30.00
		162	0	23.66	23.24	26.47	27.05	< 30.00
		1	0	19.08	18.80	21.95	22.53	< 30.00
		1	161	19.05	18.62	21.85	22.43	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM QPSK								
60	3949.98	81	40	25.56	25.03	28.31	28.89	< 30.00
		1	1	25.70	25.10	28.42	29.00	< 30.00
		1	160	25.39	25.08	28.25	28.83	< 30.00
		162	0	23.60	23.11	26.37	26.95	< 30.00
		1	0	19.25	18.58	21.94	22.52	< 30.00
		1	161	18.88	18.54	21.72	22.30	< 30.00
70	3735.00	90	45	25.51	24.80	28.18	28.76	< 30.00
		1	1	25.29	24.55	27.95	28.53	< 30.00
		1	187	25.36	24.74	28.07	28.65	< 30.00
		180	0	23.43	22.80	26.14	26.72	< 30.00
		1	0	19.04	18.24	21.67	22.25	< 30.00
		1	188	18.84	18.27	21.57	22.15	< 30.00
70	3840.00	90	45	25.50	25.05	28.29	28.87	< 30.00
		1	1	25.38	25.09	28.25	28.83	< 30.00
		1	187	25.33	24.81	28.09	28.67	< 30.00
		180	0	23.44	23.19	26.33	26.91	< 30.00
		1	0	18.94	18.76	21.86	22.44	< 30.00
		1	188	18.82	18.43	21.64	22.22	< 30.00
70	3945.00	90	45	25.56	25.10	28.35	28.93	< 30.00
		1	1	25.84	25.04	28.47	29.05	< 30.00
		1	187	25.25	24.97	28.12	28.70	< 30.00
		180	0	23.65	23.10	26.39	26.97	< 30.00
		1	0	19.32	18.67	22.02	22.60	< 30.00
		1	188	18.82	18.53	21.69	22.27	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM QPSK								
80	3740.01	108	54	25.51	24.78	28.17	28.75	< 30.00
		1	1	25.26	24.56	27.93	28.51	< 30.00
		1	215	25.44	24.78	28.13	28.71	< 30.00
		216	0	23.52	22.75	26.16	26.74	< 30.00
		1	0	18.97	18.22	21.62	22.20	< 30.00
		1	216	18.88	18.24	21.58	22.16	< 30.00
80	3840.00	108	54	25.56	25.08	28.34	28.92	< 30.00
		1	1	25.40	25.08	28.25	28.83	< 30.00
		1	215	25.41	25.00	28.22	28.80	< 30.00
		216	0	23.54	23.10	26.34	26.92	< 30.00
		1	0	18.98	18.67	21.84	22.42	< 30.00
		1	216	18.91	18.43	21.69	22.27	< 30.00
80	3939.99	108	54	25.61	25.11	28.38	28.96	< 30.00
		1	1	25.72	25.04	28.40	28.98	< 30.00
		1	215	25.39	25.12	28.27	28.85	< 30.00
		216	0	23.68	23.04	26.38	26.96	< 30.00
		1	0	19.28	18.56	21.95	22.53	< 30.00
		1	216	18.82	18.48	21.66	22.24	< 30.00
90	3745.02	120	60	25.56	24.96	28.28	28.86	< 30.00
		1	1	25.34	24.59	27.99	28.57	< 30.00
		1	243	25.54	24.80	28.20	28.78	< 30.00
		243	0	23.53	22.79	26.19	26.77	< 30.00
		1	0	19.01	18.31	21.68	22.26	< 30.00
		1	244	19.04	18.33	21.71	22.29	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM QPSK								
90	3840.00	120	60	25.58	25.14	28.38	28.96	< 30.00
		1	1	25.34	25.01	28.19	28.77	< 30.00
		1	243	25.44	24.97	28.22	28.80	< 30.00
		243	0	23.45	23.18	26.33	26.91	< 30.00
		1	0	18.87	18.70	21.80	22.38	< 30.00
		1	244	19.01	18.52	21.78	22.36	< 30.00
90	3934.98	120	60	25.62	25.03	28.35	28.93	< 30.00
		1	1	25.68	24.91	28.32	28.90	< 30.00
		1	243	25.32	25.07	28.21	28.79	< 30.00
		243	0	23.57	23.10	26.35	26.93	< 30.00
		1	0	19.34	18.65	22.02	22.60	< 30.00
		1	244	18.85	18.57	21.72	22.30	< 30.00
100	3750.00	135	67	25.52	24.92	28.24	28.82	< 30.00
		1	1	25.33	24.55	27.97	28.55	< 30.00
		1	271	25.63	24.95	28.31	28.89	< 30.00
		270	0	23.57	22.82	26.22	26.80	< 30.00
		1	0	19.04	18.28	21.69	22.27	< 30.00
		1	272	19.04	18.36	21.72	22.30	< 30.00
100	3840.00	135	67	25.58	25.19	28.40	28.98	< 30.00
		1	1	25.32	25.04	28.19	28.77	< 30.00
		1	271	25.51	25.04	28.29	28.87	< 30.00
		270	0	25.51	23.07	27.47	28.05	< 30.00
		1	0	18.85	18.63	21.75	22.33	< 30.00
		1	272	19.01	18.48	21.76	22.34	< 30.00
100	3930.00	135	67	25.66	25.05	28.38	28.96	< 30.00
		1	1	25.70	25.02	28.38	28.96	< 30.00
		1	271	25.45	25.15	28.31	28.89	< 30.00
		270	0	23.70	23.05	26.40	26.98	< 30.00
		1	0	19.36	18.67	22.04	22.62	< 30.00
		1	272	18.86	18.62	21.75	22.33	< 30.00

Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$

Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 16QAM								
10	3705.00	12	6	24.67	23.86	27.29	27.87	< 30.00
		1	1	24.45	23.66	27.08	27.66	< 30.00
		1	22	24.67	23.97	27.34	27.92	< 30.00
		24	0	22.76	21.96	25.39	25.97	< 30.00
		1	0	19.23	18.52	21.90	22.48	< 30.00
		1	23	19.12	18.37	21.77	22.35	< 30.00
10	3840.00	12	6	24.35	23.92	27.15	27.73	< 30.00
		1	1	24.36	23.89	27.14	27.72	< 30.00
		1	22	24.14	23.68	26.93	27.51	< 30.00
		24	0	22.47	22.02	25.26	25.84	< 30.00
		1	0	18.85	18.42	21.65	22.23	< 30.00
		1	23	19.95	18.34	22.23	22.81	< 30.00
10	3975.00	12	6	24.68	23.95	27.34	27.92	< 30.00
		1	1	24.65	23.94	27.32	27.90	< 30.00
		1	22	24.67	23.92	27.32	27.90	< 30.00
		24	0	22.81	22.08	25.47	26.05	< 30.00
		1	0	19.10	18.33	21.74	22.32	< 30.00
		1	23	19.06	18.34	21.73	22.31	< 30.00
15	3707.52	18	9	24.51	23.68	27.13	27.71	< 30.00
		1	1	24.44	23.54	27.02	27.60	< 30.00
		1	36	24.54	23.70	27.15	27.73	< 30.00
		36	0	22.51	21.74	25.15	25.73	< 30.00
		1	0	19.02	18.16	21.62	22.20	< 30.00
		1	37	19.07	18.27	21.70	22.28	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 16QAM								
15	3840.00	18	9	24.65	24.25	27.46	28.04	< 30.00
		1	1	24.58	24.05	27.33	27.91	< 30.00
		1	36	24.58	24.11	27.36	27.94	< 30.00
		36	0	22.77	22.28	25.54	26.12	< 30.00
		1	0	19.10	18.62	21.88	22.46	< 30.00
		1	37	19.04	18.59	21.83	22.41	< 30.00
15	3972.48	18	9	24.84	24.04	27.47	28.05	< 30.00
		1	1	24.77	23.96	27.39	27.97	< 30.00
		1	36	24.66	23.97	27.34	27.92	< 30.00
		36	0	22.87	22.09	25.51	26.09	< 30.00
		1	0	19.39	18.57	22.01	22.59	< 30.00
		1	37	19.45	18.67	22.09	22.67	< 30.00
20	3710.01	25	12	24.66	23.79	27.26	27.84	< 30.00
		1	1	24.56	23.61	27.12	27.70	< 30.00
		1	49	24.58	23.87	27.25	27.83	< 30.00
		50	0	22.66	21.82	25.27	25.85	< 30.00
		1	0	19.14	18.26	21.73	22.31	< 30.00
		1	50	19.01	18.30	21.68	22.26	< 30.00
20	3840.00	25	12	24.76	24.29	27.54	28.12	< 30.00
		1	1	24.62	24.19	27.42	28.00	< 30.00
		1	49	24.58	24.11	27.36	27.94	< 30.00
		50	0	22.73	22.27	25.52	26.10	< 30.00
		1	0	19.10	18.63	21.88	22.46	< 30.00
		1	50	19.05	18.56	21.82	22.40	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 16QAM								
20	3969.99	25	12	24.90	24.22	27.58	28.16	< 30.00
		1	1	24.78	23.99	27.41	27.99	< 30.00
		1	49	24.95	24.09	27.55	28.13	< 30.00
		50	0	22.90	22.24	25.59	26.17	< 30.00
		1	0	19.43	18.68	22.08	22.66	< 30.00
		1	50	19.46	18.67	22.09	22.67	< 30.00
25	3712.50	32	16	24.65	24.21	27.45	28.03	< 30.00
		1	1	24.60	24.08	27.36	27.94	< 30.00
		1	63	24.43	24.09	27.27	27.85	< 30.00
		64	0	22.69	22.19	25.46	26.04	< 30.00
		1	0	19.29	18.65	21.99	22.57	< 30.00
		1	64	19.17	18.82	22.01	22.59	< 30.00
25	3840.00	32	16	24.97	24.71	27.85	28.43	< 30.00
		1	1	24.61	24.52	27.58	28.16	< 30.00
		1	63	24.75	24.48	27.63	28.21	< 30.00
		64	0	22.94	22.68	25.82	26.40	< 30.00
		1	0	19.34	19.18	22.27	22.85	< 30.00
		1	64	19.29	19.06	22.19	22.77	< 30.00
25	3967.50	32	16	25.09	24.56	27.84	28.42	< 30.00
		1	1	25.02	24.29	27.68	28.26	< 30.00
		1	63	24.86	24.57	27.73	28.31	< 30.00
		64	0	23.08	22.52	25.82	26.40	< 30.00
		1	0	19.75	18.96	22.38	22.96	< 30.00
		1	64	19.47	19.05	22.28	22.86	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 16QAM								
30	3715.02	36	18	24.67	23.88	27.30	27.88	< 30.00
		1	1	24.48	23.68	27.11	27.69	< 30.00
		1	76	24.70	23.92	27.34	27.92	< 30.00
		75	0	22.78	21.89	25.37	25.95	< 30.00
		1	0	19.07	18.24	21.69	22.27	< 30.00
		1	77	19.26	18.43	21.88	22.46	< 30.00
30	3840.00	36	18	24.74	24.29	27.53	28.11	< 30.00
		1	1	24.54	24.09	27.33	27.91	< 30.00
		1	76	24.56	24.11	27.35	27.93	< 30.00
		75	0	22.83	22.37	25.62	26.20	< 30.00
		1	0	19.30	18.84	22.09	22.67	< 30.00
		1	77	19.18	18.70	21.96	22.54	< 30.00
30	3964.98	36	18	24.98	24.19	27.61	28.19	< 30.00
		1	1	24.96	24.04	27.53	28.11	< 30.00
		1	76	24.83	24.07	27.48	28.06	< 30.00
		75	0	22.95	22.24	25.62	26.20	< 30.00
		1	0	19.49	18.73	22.14	22.72	< 30.00
		1	77	19.57	18.77	22.20	22.78	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{\text{Port 0 Output Power} / 10} + 10^{\text{Port 1 Output Power} / 10}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 16QAM								
40	3720.00	50	25	24.33	23.58	26.98	27.56	< 30.00
		1	1	24.40	23.46	26.97	27.55	< 30.00
		1	104	24.51	23.68	27.13	27.71	< 30.00
		100	0	22.46	21.70	25.11	25.69	< 30.00
		1	0	19.13	18.34	21.76	22.34	< 30.00
		1	105	19.10	18.34	21.75	22.33	< 30.00
40	3840.00	50	25	24.54	24.13	27.35	27.93	< 30.00
		1	1	24.60	24.16	27.40	27.98	< 30.00
		1	104	24.49	24.02	27.27	27.85	< 30.00
		100	0	22.66	22.20	25.45	26.03	< 30.00
		1	0	19.28	18.91	22.11	22.69	< 30.00
		1	105	19.12	18.65	21.90	22.48	< 30.00
40	3960.00	50	25	24.82	24.08	27.48	28.06	< 30.00
		1	1	24.87	24.05	27.49	28.07	< 30.00
		1	104	24.87	24.13	27.53	28.11	< 30.00
		100	0	22.90	22.13	25.54	26.12	< 30.00
		1	0	19.47	18.62	22.08	22.66	< 30.00
		1	105	19.39	18.79	22.11	22.69	< 30.00
50	3720.00	64	32	24.70	23.94	27.35	27.93	< 30.00
		1	1	24.30	23.45	26.91	27.49	< 30.00
		1	131	24.35	23.67	27.03	27.61	< 30.00
		128	0	22.71	21.96	25.36	25.94	< 30.00
		1	0	18.94	18.08	21.54	22.12	< 30.00
		1	132	18.73	18.06	21.42	22.00	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 16QAM								
50	3840.00	64	32	24.55	24.09	27.34	27.92	< 30.00
		1	1	24.46	24.10	27.29	27.87	< 30.00
		1	131	24.46	23.99	27.24	27.82	< 30.00
		128	0	22.58	22.15	25.38	25.96	< 30.00
		1	0	19.03	18.70	21.88	22.46	< 30.00
		1	132	18.93	18.52	21.74	22.32	< 30.00
50	3954.99	64	32	24.82	24.02	27.45	28.03	< 30.00
		1	1	24.91	23.85	27.42	28.00	< 30.00
		1	131	24.51	23.93	27.24	27.82	< 30.00
		128	0	22.75	22.05	25.42	26.00	< 30.00
		1	0	19.34	18.51	21.96	22.54	< 30.00
		1	132	19.28	18.58	21.95	22.53	< 30.00
60	3730.02	81	40	24.36	23.71	27.06	27.64	< 30.00
		1	1	24.36	23.48	26.95	27.53	< 30.00
		1	160	24.22	23.56	26.91	27.49	< 30.00
		162	0	22.46	21.74	25.13	25.71	< 30.00
		1	0	18.93	18.19	21.59	22.17	< 30.00
		1	161	18.82	18.21	21.54	22.12	< 30.00
60	3840.00	81	40	24.63	24.22	27.44	28.02	< 30.00
		1	1	24.56	24.18	27.38	27.96	< 30.00
		1	160	24.34	23.87	27.12	27.70	< 30.00
		162	0	22.66	22.26	25.47	26.05	< 30.00
		1	0	19.19	18.69	21.96	22.54	< 30.00
		1	161	19.12	18.71	21.93	22.51	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 16QAM								
60	3949.98	81	40	24.54	24.04	27.31	27.89	< 30.00
		1	1	24.79	24.09	27.46	28.04	< 30.00
		1	160	24.29	24.00	27.16	27.74	< 30.00
		162	0	22.59	22.09	25.36	25.94	< 30.00
		1	0	19.23	18.52	21.90	22.48	< 30.00
		1	161	18.85	18.47	21.67	22.25	< 30.00
70	3735.00	90	45	24.49	23.90	27.22	27.80	< 30.00
		1	1	24.26	23.53	26.92	27.50	< 30.00
		1	187	24.25	23.65	26.97	27.55	< 30.00
		180	0	22.44	21.85	25.17	25.75	< 30.00
		1	0	19.05	18.13	21.62	22.20	< 30.00
		1	188	18.85	18.24	21.57	22.15	< 30.00
70	3840.00	90	45	24.52	24.10	27.33	27.91	< 30.00
		1	1	24.38	24.07	27.24	27.82	< 30.00
		1	187	24.12	23.71	26.93	27.51	< 30.00
		180	0	22.48	22.14	25.32	25.90	< 30.00
		1	0	18.99	18.77	21.89	22.47	< 30.00
		1	188	18.81	18.35	21.60	22.18	< 30.00
70	3945.00	90	45	24.61	24.07	27.36	27.94	< 30.00
		1	1	24.93	24.11	27.55	28.13	< 30.00
		1	187	24.29	23.99	27.15	27.73	< 30.00
		180	0	22.64	22.15	25.41	25.99	< 30.00
		1	0	19.26	18.58	21.94	22.52	< 30.00
		1	188	18.72	18.41	21.58	22.16	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 16QAM								
80	3740.01	108	54	24.45	23.77	27.13	27.71	< 30.00
		1	1	24.21	23.47	26.87	27.45	< 30.00
		1	215	24.23	23.56	26.92	27.50	< 30.00
		216	0	22.54	21.79	25.19	25.77	< 30.00
		1	0	19.01	18.14	21.61	22.19	< 30.00
		1	216	18.92	18.24	21.60	22.18	< 30.00
80	3840.00	108	54	24.49	24.09	27.30	27.88	< 30.00
		1	1	24.36	24.03	27.21	27.79	< 30.00
		1	215	24.33	24.00	27.18	27.76	< 30.00
		216	0	22.53	22.15	25.35	25.93	< 30.00
		1	0	19.00	18.65	21.84	22.42	< 30.00
		1	216	18.78	18.33	21.57	22.15	< 30.00
80	3939.99	108	54	24.61	24.11	27.38	27.96	< 30.00
		1	1	24.77	24.01	27.42	28.00	< 30.00
		1	215	24.37	24.05	27.22	27.80	< 30.00
		216	0	22.68	22.07	25.40	25.98	< 30.00
		1	0	19.23	18.51	21.90	22.48	< 30.00
		1	216	18.76	18.41	21.60	22.18	< 30.00
90	3745.02	120	60	24.53	23.92	27.25	27.83	< 30.00
		1	1	24.24	23.50	26.90	27.48	< 30.00
		1	243	24.34	23.68	27.03	27.61	< 30.00
		243	0	22.59	21.83	25.24	25.82	< 30.00
		1	0	18.99	18.32	21.68	22.26	< 30.00
		1	244	19.00	18.22	21.64	22.22	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 16QAM								
90	3840.00	120	60	24.53	24.10	27.33	27.91	< 30.00
		1	1	24.24	24.03	27.15	27.73	< 30.00
		1	243	24.47	23.93	27.22	27.80	< 30.00
		243	0	22.45	22.19	25.33	25.91	< 30.00
		1	0	18.84	18.65	21.76	22.34	< 30.00
		1	244	18.91	18.40	21.67	22.25	< 30.00
90	3934.98	120	60	24.61	24.07	27.36	27.94	< 30.00
		1	1	24.60	23.95	27.30	27.88	< 30.00
		1	243	24.34	24.02	27.19	27.77	< 30.00
		243	0	22.66	22.14	25.42	26.00	< 30.00
		1	0	19.27	18.51	21.92	22.50	< 30.00
		1	244	18.71	18.47	21.60	22.18	< 30.00
100	3750.00	135	67	24.53	23.93	27.25	27.83	< 30.00
		1	1	24.27	23.49	26.91	27.49	< 30.00
		1	271	24.57	23.89	27.25	27.83	< 30.00
		270	0	22.57	21.82	25.22	25.80	< 30.00
		1	0	18.91	18.23	21.59	22.17	< 30.00
		1	272	18.99	18.33	21.68	22.26	< 30.00
100	3840.00	135	67	24.56	24.18	27.38	27.96	< 30.00
		1	1	24.33	23.93	27.14	27.72	< 30.00
		1	271	24.52	23.97	27.26	27.84	< 30.00
		270	0	22.55	22.11	25.35	25.93	< 30.00
		1	0	18.87	18.57	21.73	22.31	< 30.00
		1	272	18.88	18.40	21.66	22.24	< 30.00
100	3930.00	135	67	24.70	24.05	27.40	27.98	< 30.00
		1	1	24.66	23.96	27.33	27.91	< 30.00
		1	271	24.27	24.02	27.16	27.74	< 30.00
		270	0	22.67	22.08	25.40	25.98	< 30.00
		1	0	19.34	18.61	22.00	22.58	< 30.00
		1	272	18.85	18.63	21.75	22.33	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{\text{Port 0 Output Power} / 10} + 10^{\text{Port 1 Output Power} / 10}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 64QAM								
10	3705.00	12	6	22.78	22.01	25.42	26.00	< 30.00
		1	1	22.68	21.85	25.30	25.88	< 30.00
		1	22	22.85	22.08	25.49	26.07	< 30.00
		24	0	22.34	21.52	24.96	25.54	< 30.00
		1	0	19.14	18.44	21.81	22.39	< 30.00
		1	23	19.03	18.36	21.72	22.30	< 30.00
10	3840.00	12	6	22.43	21.95	25.21	25.79	< 30.00
		1	1	22.42	21.93	25.19	25.77	< 30.00
		1	22	22.54	22.02	25.30	25.88	< 30.00
		24	0	21.97	21.53	24.77	25.35	< 30.00
		1	0	18.93	18.50	21.73	22.31	< 30.00
		1	23	18.92	18.32	21.64	22.22	< 30.00
10	3975.00	12	6	22.73	22.05	25.41	25.99	< 30.00
		1	1	22.75	22.01	25.41	25.99	< 30.00
		1	22	22.65	22.05	25.37	25.95	< 30.00
		24	0	22.27	21.55	24.94	25.52	< 30.00
		1	0	19.39	18.55	22.00	22.58	< 30.00
		1	23	19.18	18.41	21.82	22.40	< 30.00
15	3707.52	18	9	22.58	21.74	25.19	25.77	< 30.00
		1	1	22.42	21.62	25.05	25.63	< 30.00
		1	36	22.60	21.81	25.23	25.81	< 30.00
		36	0	22.06	21.32	24.72	25.30	< 30.00
		1	0	19.10	18.23	21.70	22.28	< 30.00
		1	37	19.19	18.62	21.92	22.50	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 64QAM								
15	3840.00	18	9	22.63	22.27	25.46	26.04	< 30.00
		1	1	22.56	22.14	25.37	25.95	< 30.00
		1	36	22.71	22.22	25.48	26.06	< 30.00
		36	0	22.29	21.82	25.07	25.65	< 30.00
		1	0	19.22	18.79	22.02	22.60	< 30.00
		1	37	19.14	18.62	21.90	22.48	< 30.00
15	3972.48	18	9	22.91	22.06	25.52	26.10	< 30.00
		1	1	22.91	22.02	25.50	26.08	< 30.00
		1	36	22.90	22.21	25.58	26.16	< 30.00
		36	0	22.41	21.66	25.06	25.64	< 30.00
		1	0	19.39	18.55	22.00	22.58	< 30.00
		1	37	19.42	18.61	22.04	22.62	< 30.00
20	3710.01	25	12	22.66	21.80	25.26	25.84	< 30.00
		1	1	22.55	21.82	25.21	25.79	< 30.00
		1	49	22.54	21.81	25.20	25.78	< 30.00
		50	0	22.16	21.36	24.79	25.37	< 30.00
		1	0	18.99	18.22	21.63	22.21	< 30.00
		1	50	19.11	18.39	21.78	22.36	< 30.00
20	3840.00	25	12	22.74	22.32	25.55	26.13	< 30.00
		1	1	22.63	22.22	25.44	26.02	< 30.00
		1	49	22.52	22.07	25.31	25.89	< 30.00
		50	0	22.26	21.79	25.04	25.62	< 30.00
		1	0	19.28	18.85	22.08	22.66	< 30.00
		1	50	19.21	18.66	21.95	22.53	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 64QAM								
20	3969.99	25	12	22.88	22.19	25.56	26.14	< 30.00
		1	1	22.85	22.01	25.46	26.04	< 30.00
		1	49	23.04	22.22	25.66	26.24	< 30.00
		50	0	22.44	21.71	25.10	25.68	< 30.00
		1	0	19.42	18.61	22.04	22.62	< 30.00
		1	50	19.52	18.70	22.14	22.72	< 30.00
25	3712.50	32	16	22.66	22.25	25.47	26.05	< 30.00
		1	1	22.81	22.31	25.58	26.16	< 30.00
		1	63	22.73	22.45	25.60	26.18	< 30.00
		64	0	22.21	21.79	25.02	25.60	< 30.00
		1	0	19.35	18.79	22.09	22.67	< 30.00
		1	64	19.33	18.94	22.15	22.73	< 30.00
25	3840.00	32	16	22.92	22.66	25.80	26.38	< 30.00
		1	1	22.85	22.70	25.79	26.37	< 30.00
		1	63	23.06	22.71	25.90	26.48	< 30.00
		64	0	22.49	22.17	25.34	25.92	< 30.00
		1	0	19.44	19.36	22.41	22.99	< 30.00
		1	64	19.36	19.01	22.20	22.78	< 30.00
25	3967.50	32	16	23.09	22.52	25.82	26.40	< 30.00
		1	1	23.12	22.51	25.84	26.42	< 30.00
		1	63	23.32	22.83	26.09	26.67	< 30.00
		64	0	22.60	22.03	25.33	25.91	< 30.00
		1	0	19.87	19.10	22.51	23.09	< 30.00
		1	64	19.46	19.06	22.27	22.85	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 64QAM								
30	3715.02	36	18	22.73	21.85	25.32	25.90	< 30.00
		1	1	22.66	21.88	25.30	25.88	< 30.00
		1	76	22.85	22.16	25.53	26.11	< 30.00
		75	0	22.25	21.47	24.89	25.47	< 30.00
		1	0	19.20	18.33	21.80	22.38	< 30.00
		1	77	19.10	18.41	21.78	22.36	< 30.00
30	3840.00	36	18	22.82	22.39	25.62	26.20	< 30.00
		1	1	22.90	22.43	25.68	26.26	< 30.00
		1	76	22.85	22.42	25.65	26.23	< 30.00
		75	0	22.33	21.87	25.12	25.70	< 30.00
		1	0	19.38	19.01	22.21	22.79	< 30.00
		1	77	19.30	18.77	22.05	22.63	< 30.00
30	3964.98	36	18	23.06	22.18	25.65	26.23	< 30.00
		1	1	22.98	22.11	25.58	26.16	< 30.00
		1	76	22.89	22.14	25.54	26.12	< 30.00
		75	0	22.47	21.70	25.11	25.69	< 30.00
		1	0	19.60	18.75	22.21	22.79	< 30.00
		1	77	19.48	18.73	22.13	22.71	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{\text{Port 0 Output Power} / 10} + 10^{\text{Port 1 Output Power} / 10}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 64QAM								
40	3720.00	50	25	22.37	21.56	24.99	25.57	< 30.00
		1	1	22.29	21.47	24.91	25.49	< 30.00
		1	104	22.49	21.73	25.14	25.72	< 30.00
		100	0	21.99	21.23	24.64	25.22	< 30.00
		1	0	19.14	18.33	21.76	22.34	< 30.00
		1	105	19.15	18.36	21.78	22.36	< 30.00
40	3840.00	50	25	22.64	22.17	25.42	26.00	< 30.00
		1	1	22.67	22.20	25.45	26.03	< 30.00
		1	104	22.56	22.06	25.33	25.91	< 30.00
		100	0	22.20	21.69	24.96	25.54	< 30.00
		1	0	19.32	18.87	22.11	22.69	< 30.00
		1	105	19.21	18.71	21.98	22.56	< 30.00
40	3960.00	50	25	22.80	22.09	25.47	26.05	< 30.00
		1	1	22.90	22.07	25.52	26.10	< 30.00
		1	104	22.98	22.25	25.64	26.22	< 30.00
		100	0	22.40	21.65	25.05	25.63	< 30.00
		1	0	19.50	18.62	22.09	22.67	< 30.00
		1	105	19.35	18.71	22.05	22.63	< 30.00
50	3720.00	64	32	22.75	22.02	25.41	25.99	< 30.00
		1	1	22.67	21.81	25.27	25.85	< 30.00
		1	131	22.66	22.01	25.36	25.94	< 30.00
		128	0	22.16	21.39	24.80	25.38	< 30.00
		1	0	18.85	18.02	21.47	22.05	< 30.00
		1	132	18.80	18.11	21.48	22.06	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 64QAM								
50	3840.00	64	32	22.56	22.11	25.35	25.93	< 30.00
		1	1	22.68	22.23	25.47	26.05	< 30.00
		1	131	22.43	22.02	25.24	25.82	< 30.00
		128	0	22.06	21.60	24.85	25.43	< 30.00
		1	0	19.05	18.68	21.88	22.46	< 30.00
		1	132	19.11	18.72	21.93	22.51	< 30.00
50	3954.99	64	32	22.81	22.03	25.45	26.03	< 30.00
		1	1	22.89	22.07	25.51	26.09	< 30.00
		1	131	22.91	22.28	25.62	26.20	< 30.00
		128	0	22.25	21.52	24.91	25.49	< 30.00
		1	0	19.28	18.51	21.92	22.50	< 30.00
		1	132	19.20	18.47	21.86	22.44	< 30.00
60	3730.02	81	40	22.44	21.78	25.13	25.71	< 30.00
		1	1	22.55	21.76	25.18	25.76	< 30.00
		1	160	22.64	21.91	25.30	25.88	< 30.00
		162	0	21.97	21.25	24.64	25.22	< 30.00
		1	0	18.85	18.08	21.49	22.07	< 30.00
		1	161	18.87	18.23	21.57	22.15	< 30.00
60	3840.00	81	40	22.68	22.23	25.47	26.05	< 30.00
		1	1	22.53	22.19	25.37	25.95	< 30.00
		1	160	22.65	22.19	25.44	26.02	< 30.00
		162	0	22.15	21.74	24.96	25.54	< 30.00
		1	0	19.06	18.73	21.91	22.49	< 30.00
		1	161	18.98	18.47	21.74	22.32	< 30.00

Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$

Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 64QAM								
60	3949.98	81	40	22.60	22.06	25.35	25.93	< 30.00
		1	1	22.80	22.14	25.49	26.07	< 30.00
		1	160	22.47	22.15	25.32	25.90	< 30.00
		162	0	22.09	21.58	24.85	25.43	< 30.00
		1	0	19.17	18.51	21.86	22.44	< 30.00
		1	161	18.85	18.48	21.68	22.26	< 30.00
70	3735.00	90	45	22.60	21.86	25.26	25.84	< 30.00
		1	1	22.38	21.78	25.10	25.68	< 30.00
		1	187	22.51	21.94	25.24	25.82	< 30.00
		180	0	21.98	21.41	24.71	25.29	< 30.00
		1	0	19.01	18.15	21.61	22.19	< 30.00
		1	188	18.85	18.23	21.56	22.14	< 30.00
70	3840.00	90	45	22.52	22.13	25.34	25.92	< 30.00
		1	1	22.62	22.22	25.43	26.01	< 30.00
		1	187	22.57	22.05	25.33	25.91	< 30.00
		180	0	21.98	21.59	24.80	25.38	< 30.00
		1	0	18.86	18.63	21.76	22.34	< 30.00
		1	188	18.77	18.32	21.56	22.14	< 30.00
70	3945.00	90	45	22.64	22.11	25.39	25.97	< 30.00
		1	1	22.90	22.17	25.56	26.14	< 30.00
		1	187	22.52	22.18	25.36	25.94	< 30.00
		180	0	22.21	21.68	24.96	25.54	< 30.00
		1	0	19.65	18.90	22.30	22.88	< 30.00
		1	188	18.98	18.55	21.78	22.36	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 64QAM								
80	3740.01	108	54	22.55	21.81	25.21	25.79	< 30.00
		1	1	22.35	21.54	24.97	25.55	< 30.00
		1	215	22.55	21.95	25.27	25.85	< 30.00
		216	0	22.04	21.29	24.69	25.27	< 30.00
		1	0	18.90	18.13	21.54	22.12	< 30.00
		1	216	18.82	18.13	21.50	22.08	< 30.00
80	3840.00	108	54	22.53	22.07	25.32	25.90	< 30.00
		1	1	22.36	22.11	25.25	25.83	< 30.00
		1	215	22.40	22.03	25.23	25.81	< 30.00
		216	0	22.03	21.61	24.84	25.42	< 30.00
		1	0	18.96	18.64	21.81	22.39	< 30.00
		1	216	18.89	18.49	21.70	22.28	< 30.00
80	3939.99	108	54	22.60	22.06	25.35	25.93	< 30.00
		1	1	22.79	21.96	25.41	25.99	< 30.00
		1	215	22.51	22.12	25.33	25.91	< 30.00
		216	0	22.18	21.56	24.89	25.47	< 30.00
		1	0	19.43	18.75	22.11	22.69	< 30.00
		1	216	19.11	18.66	21.90	22.48	< 30.00
90	3745.02	120	60	22.62	21.98	25.32	25.90	< 30.00
		1	1	22.46	21.60	25.06	25.64	< 30.00
		1	243	22.73	22.06	25.42	26.00	< 30.00
		243	0	22.03	21.35	24.71	25.29	< 30.00
		1	0	18.94	18.21	21.60	22.18	< 30.00
		1	244	18.96	18.29	21.65	22.23	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Channel Bandwidth (MHz)	Frequency (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
DFT-s-OFDM 64QAM								
90	3840.00	120	60	22.59	22.14	25.38	25.96	< 30.00
		1	1	22.30	22.02	25.17	25.75	< 30.00
		1	243	22.43	22.03	25.24	25.82	< 30.00
		243	0	22.01	21.65	24.84	25.42	< 30.00
		1	0	19.21	19.04	22.14	22.72	< 30.00
		1	244	19.14	18.69	21.93	22.51	< 30.00
90	3934.98	120	60	22.63	22.09	25.38	25.96	< 30.00
		1	1	22.80	22.07	25.46	26.04	< 30.00
		1	243	22.41	22.18	25.31	25.89	< 30.00
		243	0	22.18	21.62	24.92	25.50	< 30.00
		1	0	19.49	18.74	22.14	22.72	< 30.00
		1	244	18.80	18.62	21.72	22.30	< 30.00
100	3750.00	135	67	22.54	21.91	25.25	25.83	< 30.00
		1	1	22.34	21.70	25.04	25.62	< 30.00
		1	271	22.74	22.04	25.41	25.99	< 30.00
		270	0	22.11	21.32	24.74	25.32	< 30.00
		1	0	19.17	18.42	21.82	22.40	< 30.00
		1	272	19.23	18.55	21.91	22.49	< 30.00
100	3840.00	135	67	22.61	22.12	25.38	25.96	< 30.00
		1	1	22.42	22.15	25.30	25.88	< 30.00
		1	271	22.54	22.01	25.29	25.87	< 30.00
		270	0	22.04	21.63	24.85	25.43	< 30.00
		1	0	19.08	18.72	21.91	22.49	< 30.00
		1	272	19.02	18.49	21.77	22.35	< 30.00
100	3930.00	135	67	22.65	22.21	25.45	26.03	< 30.00
		1	1	22.74	22.07	25.43	26.01	< 30.00
		1	271	22.65	22.41	25.54	26.12	< 30.00
		270	0	22.05	21.58	24.83	25.41	< 30.00
		1	0	19.24	18.59	21.94	22.52	< 30.00
		1	272	18.86	18.57	21.73	22.31	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{\text{Port 0 Output Power} / 10} + 10^{\text{Port 1 Output Power} / 10}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								