


FCC SAR TEST REPORT

FCC ID : XMR2023RM520NGLM
Equipment : 5G Sub-6 GHz M.2 Module
Brand Name : Quectel
Model Name : RM520N-GL
Applicant : Quectel Wireless Solutions Co., Ltd.
Building 5, Shanghai Business Park Phase III (Area B), No.1016
Tianlin Road, Minhang District, Shanghai, China, 200233
Manufacturer : LCFC (HeFei) Electronics Technology Co., Ltd.
No. 3188-1, Yungu Road (Hefei Export Processing Zone), Hefei
Economics & Technology Development Area, Anhui, CHINA
Standard : FCC 47 CFR Part 2 (2.1093)

Equipment: Quectel RM520N-GL, Intel AX211D2W and Intel BE200D2W tested inside of Lenovo Notebook Computer.

The product was received on Oct. 13, 2023 and testing was started from Nov. 23, 2023 and completed on Dec. 15, 2023. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample provide by manufacturer and the test data has been evaluated in accordance with the test procedures given in 47 CFR Part 2.1093 and FCC KDB and has been pass the FCC requirement.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. Laboratory, the test report shall not be reproduced except in full.



Approved by: Cona Huang / Deputy Manager



Sporton International Inc. Wensan Laboratory



Table of Contents

1. Statement of Compliance 4

2. Guidance Applied..... 4

3. Equipment Under Test (EUT) Information 5

 3.1 General Information 5

 3.2 General LTE SAR Test and Reporting Considerations 7

 3.3 General 5G NR SAR Test and Reporting Considerations 11

4. Proximity Sensor Triggering Test.....14

5. RF Exposure Limits.....30

 5.1 Uncontrolled Environment.....30

 5.2 Controlled Environment.....30

6. Specific Absorption Rate (SAR).....31

 6.1 Introduction 31

 6.2 SAR Definition 31

7. System Description and Setup32

 7.1 Test Site Location.....32

 7.2 E-Field Probe 33

 7.3 Data Acquisition Electronics (DAE) 33

 7.4 Phantom.....34

 7.5 Device Holder.....35

8. Measurement Procedures36

 8.1 Spatial Peak SAR Evaluation.....36

 8.2 Power Reference Measurement.....37

 8.3 Area Scan 37

 8.4 Zoom Scan.....38

 8.5 Volume Scan Procedures.....38

 8.6 Power Drift Monitoring.....38

9. Test Equipment List39

10. System Verification40

 10.1 Tissue Verification 40

 10.2 System Performance Check Results..... 41

11. RF Exposure Positions42

 11.1 SAR Testing for Tablet 42

12. Measurement procedure for output power and SAR43

13. DL/UL carrier aggregation51

14. SAR Test Results67

 14.1 Body SAR 69

 14.2 Repeated SAR Measurement 97

 14.3 LTE Band 41 Power Class 2 and Power Class 3 Linearity 98

 14.4 FR1 n41/n77 Power Class 2 and Power Class 3 Linearity 99

15. Simultaneous Transmission Analysis101

 15.1 Body Exposure Conditions 102

 15.2 SPLSR Evaluation and Analysis..... 103

16. Uncertainty Assessment109

17. References109

Appendix A. Plots of System Performance Check

Appendix B. Plots of High SAR Measurement

Appendix C. DASY Calibration Certificate

Appendix D-1. Sensor OFF Output Power Measurement

Appendix D-2. Sensor ON Output Power Measurement

Appendix E. Test Setup Photos and Antenna Location



1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) for Quectal Wireless Solutions Co., Ltd., 5G Sub-6 GHz M.2 Module, RM520N-GL, are as follows.

Equipment Class	Frequency Band		Highest SAR Summary		Highest Simultaneous Transmission 1g SAR (W/kg)	
			Body (Separation 0mm)	1g SAR (W/kg)		
Licensed	WCDMA	WCDMA II		1.05	1.50	
		WCDMA IV		1.09		
		WCDMA V		1.10		
	LTE	LTE Band 7		1.19		
		LTE Band 12/17		1.10		
		LTE Band 13		1.18		
		LTE Band 14		1.19		
		LTE Band 2/25		1.12		
		LTE Band 5/26		1.09		
		LTE Band 30		1.16		
		LTE Band 38/41		1.12		
		LTE Band 42		1.19		
		LTE Band 43		1.13		
		LTE Band 48		1.15		
		LTE Band 4/66		1.12		
		LTE Band 71		1.15		
		FR1	FR1 n7			1.12
			FR1 n12/n17			1.10
	FR1 n13			1.20		
	FR1 n14			1.18		
	FR1 n2/n25			1.20		
	FR1 n5/n26			1.14		
	FR1 n30			1.07		
	FR1 n38/n41			1.10		
	FR1 n48			1.09		
	FR1 n66			1.18		
	FR1 n71			1.10		
	FR1 n77/n78			1.03		
	Date of Testing:			2023/11/23 ~ 2023/12/15		

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation and the FCC designation No. TW3786 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test. This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR) specified in FCC 47 CFR part 2 (2.1093), and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.

Reviewed by: Jason Wang
Report Producer: Carlie Tsai

2. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards, the below KDB standard may not including in the TAF code without accreditation.

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 616217 D04 SAR for laptop and tablets v01r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05
- FCC KDB 941225 D05A Rel.10 LTE SAR Test Guidance v01r02



3. Equipment Under Test (EUT) Information

3.1 General Information

Product Feature & Specification	
Equipment Name	5G Sub-6 GHz M.2 Module
Brand Name	Quectel
Model Name	RM520N-GL
FCC ID	XMR2023RM520NGLM
Wireless Technology and Frequency Range	WCDMA Band II: 1850 MHz ~ 1910 MHz WCDMA Band IV: 1710 MHz ~ 1755 MHz WCDMA Band V: 824 MHz ~ 849 MHz LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 14: 788 MHz ~ 798 MHz LTE Band 17: 704 MHz ~ 716 MHz LTE Band 25: 1850 MHz ~ 1915 MHz LTE Band 26: 814 MHz ~ 849 MHz LTE Band 30: 2305 MHz ~ 2315 MHz LTE Band 38: 2570 MHz ~ 2620 MHz LTE Band 41: 2496 MHz ~ 2690 MHz LTE Band 42: 3450 MHz ~ 3550 MHz LTE Band 43: 3700 MHz ~ 3800 MHz LTE Band 48: 3550 MHz ~ 3700 MHz LTE Band 66: 1710 MHz ~ 1780 MHz LTE Band 71: 663 MHz ~ 698 MHz 5G NR n2 : 1850 MHz ~ 1910 MHz 5G NR n5 : 824 MHz ~ 849 MHz 5G NR n7 : 2500 MHz ~ 2570 MHz 5G NR n12 : 699 MHz ~ 716 MHz 5G NR n13: 777 MHz ~ 787 MHz 5G NR n14 : 788 MHz ~ 798 MHz 5G NR n25 : 1850 MHz ~ 1915 MHz 5G NR n26 : 814 MHz ~ 849 MHz 5G NR n30 : 2305 MHz ~ 2315 MHz 5G NR n38 : 2570 MHz ~ 2620 MHz 5G NR n41 : 2496 MHz ~ 2690 MHz 5G NR n48 : 3550 MHz ~ 3700 MHz 5G NR n66 : 1710 MHz ~ 1780 MHz 5G NR n71 : 663 MHz ~ 698 MHz 5G NR n77 : 3700 MHz ~ 3980 MHz, 3450 MHz ~ 3550 MHz 5G NR n78 : 3700 MHz ~ 3800 MHz, 3450 MHz ~ 3550 MHz
Mode	RMC 12.2Kbps HSDPA HSUPA DC-HSDPA LTE: QPSK, 16QAM, 64QAM, 256QAM 5G NR: DFT-s-OFDM/CP-OFDM, Pi/2 BPSK/QPSK/16QAM/64QAM/256QAM
Remark:	1. This device is convertible type notebook PC, and there are two mode as usage way, one is laptop mode, another is tablet mode. 2. This device has two antenna vendors; RF exposure evaluation selects SPEED as the main test, SAA will spot check worst case found in SPEED.



WWAN Antenna Information				
Main Antenna	Manufacturer	Amphenol	Peak gain(dBi)	2.00
	Part number	TKF113-16-000-R	Type	PIFA
	Manufacturer	Speed Taiwan Corporation	Peak gain(dBi)	1.93
	Part number	F-0G-JV-0228-001-00	Type	PIFA
MIMO2 Antenna	Manufacturer	Amphenol	Peak gain(dBi)	1.95
	Part number	TKF114-16-000-R	Type	PIFA
	Manufacturer	Speed Taiwan Corporation	Peak gain(dBi)	1.99
	Part number	F-0G-JV-0228-002-00	Type	PIFA
Auxiliary Antenna	Manufacturer	Amphenol	Peak gain(dBi)	0.17
	Part number	TKF114-16-000-R	Type	PIFA
	Manufacturer	Speed Taiwan Corporation	Peak gain(dBi)	0.25
	Part number	F-0G-JV-0228-002-00	Type	PIFA

Host Information	
Equipment Name	Notebook Computer
Brand Name	Lenovo
Model Name	TP00151A
Integrated WLAN Module 1	Brand Name: Intel Model Name: AX211D2W
Integrated WLAN Module 2	Brand Name: Intel Model Name: BE200D2W
Integrated NFC Module	Brand Name: Foxconn Model Name: T77H747
Wireless Technology and Frequency Range	WLAN 2.4 GHz Band: 2400 MHz ~ 2483.5 MHz WLAN 5.2 GHz Band: 5150 MHz ~ 5250 MHz WLAN 5.3 GHz Band: 5250 MHz ~ 5350 MHz WLAN 5.6 GHz Band: 5470 MHz ~ 5725 MHz WLAN 5.8 GHz Band: 5725 MHz ~ 5850 MHz WLAN 5.9 GHz Band: 5850 MHz ~ 5895 MHz WLAN 6E: 5925 MHz ~ 6425 MHz, 6425 MHz ~ 6525 MHz, 6525 MHz ~ 6875 MHz, 6875 MHz ~ 7125 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz NFC: 13.56 MHz
Mode	WLAN: 802.11a/b/g/n/ac/ax/be HT20/HT40/VHT20/VHT40/VHT80/VHT160/HE20/HE40/HE80/HE160/EHT20/EHT40/EHT80/EHT160/EHT320 Bluetooth BR/EDR/LE NFC: ASK
EUT Stage	Production Unit
Remark:	
<ol style="list-style-type: none"> The Intel AX211D2W WLAN/BT module is integrated into this host. The WLAN 2.4GHz, 5GHz and Bluetooth SAR results are referenced from Intel SAR report, report number: 230705-01.TR01 (FCC ID: PD9AX211D2), the WLAN 5.9GHz SAR referred to report No.: 230705-01.TR02 (FCC ID: PD9AX211D2), and the WLAN 6GHz SAR referred to report No.: 230705-01.TR03 (FCC ID: PD9AX211D2). The Intel BE200D2W WLAN/BT module is also integrated into this host. The WLAN 2.4GHz, 5GHz and Bluetooth SAR results are referenced from Intel SAR report, report number: 230705-02.TR01 (FCC ID: PD9BE200D2), and the WLAN 6GHz SAR referred to report No.: 230705-02.TR02 (FCC ID: PD9BE200D2) and these SAR results are also used to perform simultaneous transmission analysis. This NFC FCC ID: MCLT77H747 RF Exposure was address in report no.:SFBHQC-WTW-P22070414A and 1mW exemption is applicable for the NFC transmitter and cannot use estimated SAR for Sim-Tx analysis. 	



3.2 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r05																																																															
FCC ID	XMR2023RM520NGLM																																																														
Equipment Name	5G Sub-6 GHz M.2 Module																																																														
Operating Frequency Range of each LTE transmission band	LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 14: 788 MHz ~ 798 MHz LTE Band 17: 704 MHz ~ 716 MHz LTE Band 25: 1850 MHz ~ 1915 MHz LTE Band 26: 814 MHz ~ 849 MHz LTE Band 30: 2305 MHz ~ 2315 MHz LTE Band 38: 2570 MHz ~ 2620 MHz LTE Band 41: 2496 MHz ~ 2690 MHz LTE Band 42: 3450 MHz ~ 3550 MHz LTE Band 43: 3700 MHz ~ 3800 MHz LTE Band 48: 3550 MHz ~ 3700 MHz LTE Band 66: 1710 MHz ~ 1780 MHz LTE Band 71: 663 MHz ~ 698 MHz																																																														
Channel Bandwidth	LTE Band 2: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 4: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 5: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 7: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 12: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 13: 5MHz, 10MHz LTE Band 14: 5MHz, 10MHz LTE Band 17: 5MHz, 10MHz LTE Band 25: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 26: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz LTE Band 30: 5MHz, 10MHz LTE Band 38: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 41: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 42: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 43: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 48: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 66: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 71: 5MHz, 10MHz, 15MHz, 20MHz																																																														
uplink modulations used	QPSK / 16QAM / 64QAM / 256QAM																																																														
LTE Voice / Data requirements	Data only																																																														
LTE MPR permanently built-in by design	<p>Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3</p> <table border="1"> <thead> <tr> <th rowspan="2">Modulation</th> <th colspan="6">Channel bandwidth / Transmission bandwidth (N_{RB})</th> <th rowspan="2">MPR (dB)</th> </tr> <tr> <th>1.4 MHz</th> <th>3.0 MHz</th> <th>5 MHz</th> <th>10 MHz</th> <th>15 MHz</th> <th>20 MHz</th> </tr> </thead> <tbody> <tr> <td>QPSK</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 3</td> </tr> <tr> <td>256 QAM</td> <td colspan="6">≥ 1</td> <td>≤ 5</td> </tr> </tbody> </table>	Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3	256 QAM	≥ 1						≤ 5
Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)																																																								
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																																									
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																																								
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																																								
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																																								
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2																																																								
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3																																																								
256 QAM	≥ 1						≤ 5																																																								
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)																																																														
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																														
Power reduction applied to satisfy SAR compliance	Yes, Proximity and G-Sensor.																																																														
LTE Carrier Aggregation Combinations	Inter-Band and Intra-Band possible combinations and the detail power measurement please referred to section 13.																																																														
LTE Carrier Aggregation Additional Information	This device supports maximum of 5 carriers in the downlink and 2 carriers in the uplink. Additional following LTE Release features are not supported: Relay, HetNet, Enhanced MIMO, eICI, WiFi Offloading, MDH, eMBMA, Cross-Carrier Scheduling, Enhanced SC-FDMA.																																																														



Transmission (H, M, L) channel numbers and frequencies in each LTE band												
LTE Band 2												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900
LTE Band 4												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745
LTE Band 5												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20407	824.7	20415	825.5	20425	826.5	20450	829				
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5				
H	20643	848.3	20635	847.5	20625	846.5	20600	844				
LTE Band 7												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20775	2502.5	20800	2505	20825	2507.5	20850	2510				
M	21100	2535	21100	2535	21100	2535	21100	2535				
H	21425	2567.5	21400	2565	21375	2562.5	21350	2560				
LTE Band 12												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	23017	699.7	23025	700.5	23035	701.5	23060	704				
M	23095	707.5	23095	707.5	23095	707.5	23095	707.5				
H	23173	715.3	23165	714.5	23155	713.5	23130	711				
LTE Band 13												
	Bandwidth 5 MHz				Bandwidth 10 MHz							
	Channel #		Freq.(MHz)		Channel #		Freq.(MHz)		Channel #		Freq.(MHz)	
L	23205		779.5		23230		782		23230		782	
M	23230		782									
H	23255		784.5									
LTE Band 14												
	Bandwidth 5 MHz				Bandwidth 10 MHz							
	Channel #		Channel #		Channel #		Freq.(MHz)		Channel #		Freq.(MHz)	
L	23305		790.5		23330		793		23330		793	
M	23330		793									
H	23355		795.5									
LTE Band 17												
	Bandwidth 5 MHz				Bandwidth 10 MHz							
	Channel #		Freq.(MHz)		Channel #		Freq. (MHz)		Channel #		Freq. (MHz)	
L	23755		706.5		23780		709		23780		709	
M	23790		710		23790		710		23790		710	
H	23825		713.5		23800		711		23800		711	



LTE Band 25												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	26047	1850.7	26055	1851.5	26065	1852.5	26090	1855	26115	1857.5	26140	1860
M	26340	1880	26340	1880	26340	1880	26340	1880	26340	1880	26340	1880
H	26683	1914.3	26675	1913.5	26665	1912.5	26640	1910	26615	1907.5	26590	1905
LTE Band 26												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz			
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	26697	814.7	26705	815.5	26715	816.5	26740	819	26765	821.5		
M	26865	831.5	26865	831.5	26865	831.5	26865	831.5	26865	831.5	26865	831.5
H	27033	848.3	27025	847.5	27015	846.5	26990	844	26965	841.5		
LTE Band 30												
	Bandwidth 5 MHz					Bandwidth 10 MHz						
	Channel #		Freq.(MHz)			Channel #		Freq.(MHz)				
L	27685		2307.5			27710		2310				
M	27710		2310									
H	27735		2312.5									
LTE Band 38												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	37775	2572.5	37800	2575	37825	2577.5	37850	2580				
M	38000	2595	38000	2595	38000	2595	38000	2595	38000	2595		
H	38225	2617.5	38200	2615	38175	2612.5	38150	2610				
LTE Band 41												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	39675	2498.5	39700	2501	39725	2503.5	39750	2506				
L	40148	2545.8	40160	2547	40173	2548.3	40185	2549.5				
M												
M	40620	2593	40620	2593	40620	2593	40620	2593				
H	41093	2640.3	41080	2639	41068	2637.8	41055	2636.5				
H	41565	2687.5	41540	2685	41515	2682.5	41490	2680				
LTE Band 42												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	42115	3452.5	42140	3455	42165	3457.5	42190	3460				
M	42590	3500	42590	3500	42590	3500	42590	3500	42590	3500		
H	43065	3547.5	43040	3545	43015	3542.5	42990	3540				
LTE Band 43												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	44615	3702.5	44640	3705	44665	3707.5	44690	3710				
M	45090	3750	45090	3750	45090	3750	45090	3750	45090	3750		
H	45565	3797.5	45540	3795	45515	3792.5	45490	3790				
LTE Band 48												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	55265	3552.5	55290	3555	55315	3557.5	55340	3560				
L	55810	3607	55815	3607.5	55820	3608	55830	3609				
M												
M	56170	3643	56165	3642.5	56160	3642	56150	3641				
H	56715	3697.5	56690	3695	56665	3692.5	56640	3690				



LTE Band 66												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	131979	1710.7	131987	1711.5	131997	1712.5	132022	1715	132047	1717.5	132072	1720
M	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745
H	132665	1779.3	132657	1778.5	132647	1777.5	132622	1775	132597	1772.5	132572	1770
LTE Band 71												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)		
L	133147	665.5	133172	668	133197	670.5	133222	673				
M	133297	680.5	133297	680.5	133297	680.5	133297	680.5				
H	133447	695.5	133422	693	133397	690.5	133372	688				



3.3 General 5G NR SAR Test and Reporting Considerations

5G NR Information	
FCC ID	XMR2023RM520NGLM
Equipment Name	5G Sub-6 GHz M.2 Module
Operating Frequency Range of each 5G NR transmission band	5G NR n2 : 1850 MHz ~ 1910 MHz 5G NR n5 : 824 MHz ~ 849 MHz 5G NR n7 : 2500 MHz ~ 2570 MHz 5G NR n12 : 699 MHz ~ 716 MHz 5G NR n13: 777 MHz ~ 787 MHz 5G NR n14 : 788 MHz ~ 798 MHz 5G NR n25 : 1850 MHz ~ 1915 MHz 5G NR n26 : 814 MHz ~ 849 MHz 5G NR n30 : 2305 MHz ~ 2315 MHz 5G NR n38 : 2570 MHz ~ 2620 MHz 5G NR n41 : 2496 MHz ~ 2690 MHz 5G NR n48 : 3550 MHz ~ 3700 MHz 5G NR n66 : 1710 MHz ~ 1780 MHz 5G NR n71 : 663 MHz ~ 698 MHz 5G NR n77 : 3700 MHz ~ 3980 MHz, 3450 MHz ~ 3550 MHz 5G NR n78 : 3700 MHz ~ 3800 MHz, 3450 MHz ~ 3550 MHz
Channel Bandwidth	5G NR n2: 5MHz, 10MHz, 15MHz, 20MHz 5G NR n5: 5MHz, 10MHz, 15MHz, 20MHz 5G NR n7: 5MHz, 10MHz, 15MHz, 20MHz, 25 MHz, 30MHz, 40MHz 5G NR n12: 5MHz, 10MHz, 15MHz 5G NR n13: 5MHz, 10MHz 5G NR n14: 5MHz, 10MHz 5G NR n25: 5MHz, 10MHz, 15MHz, 20MHz, 25 MHz 30MHz, 40MHz 5G NR n26: 5MHz, 10MHz, 15MHz, 20MHz 5G NR n30: 5MHz, 10MHz 5G NR n38: 10MHz, 15MHz, 20MHz, 30MHz, 40MHz 5G NR n41: 20MHz, 30MHz, 40MHz, 50MHz, 60MHz, 70MHz, 80MHz, 90MHz, 100MHz 5G NR n48: 10MHz, 20MHz, 30MHz, 40MHz 5G NR n66: 5MHz, 10MHz, 15MHz, 20MHz, 30MHz, 40MHz 5G NR n71: 5MHz, 10MHz, 15MHz, 20MHz 5G NR n77: 10MHz, 15MHz, 20MHz, 30MHz, 40MHz, 50MHz, 60MHz, 70MHz, 80MHz, 90MHz, 100MHz 5G NR n78: 10MHz, 15MHz, 20MHz, 30MHz, 40MHz, 50MHz, 60MHz, 70MHz, 80MHz, 90MHz, 100MHz
SCS	FDD: SCS15KHz, TDD: SCS30KHz
uplink modulations used	DFT-s-OFDM: PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM CP-OFDM QPSK / 16QAM / 64QAM / 256QAM
A-MPR (Additional MPR) disabled for SAR Testing?	Yes
LTE Anchor Bands for n2	LTE B4/5/7/12/13/14/30/66/71
LTE Anchor Bands for n5	LTE B2/7/30/48/66
LTE Anchor Bands for n7	LTE B2/4/5/12/13/66/71
LTE Anchor Bands for n12	LTE B2/7/30/48/66
LTE Anchor Bands for n14	LTE B2/30/66
LTE Anchor Bands for n25	LTE B5/7/12/13/26/48/66/71
LTE Anchor Bands for n30	LTE B2/5/12/14/66
LTE Anchor Bands for n38	LTE B2/4/5/12/66/71
LTE Anchor Bands for n41	LTE B2/4/5/12/25/26/66/71
LTE Anchor Bands for n48	LTE B2/5/13/66
LTE Anchor Bands for n66	LTE B2/5/7/12/13/14/30/48/71
LTE Anchor Bands for n71	LTE B2/7/48/66
LTE Anchor Bands for n77	LTE B2/5/7/12/13/14/25/30/41/66/71
LTE Anchor Bands for n78	LTE B2/4/5/7/12/13/25/26/38/41/66/71



NR Band 2														
Bandwidth 5MHz			Bandwidth 10MHz			Bandwidth 15MHz			Bandwidth 20MHz					
Ch. #	Freq. (MHz)		Ch. #	Freq. (MHz)		Ch. #	Freq. (MHz)		Ch. #	Freq. (MHz)				
L	370500	1852.5	371000	1855	371500	1857.5	372000	1860						
M	376000	1880	376000	1880	376000	1880	376000	1880						
H	381500	1907.5	381000	1905	380500	1902.5	380000	1900						
NR Band 5														
Bandwidth 5MHz			Bandwidth 10MHz			Bandwidth 15MHz			Bandwidth 20MHz					
Ch. #	Freq. (MHz)		Ch. #	Freq. (MHz)		Ch. #	Freq. (MHz)		Ch. #	Freq. (MHz)				
L	165300	826.5	165800	829	166300	831.5	166800	834						
M	167300	836.5	167300	836.5	167300	836.5	167300	836.5						
H	169300	846.5	168800	844	168300	841.5	167800	839						
NR Band 7														
Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz		Bandwidth 25MHz		Bandwidth 30MHz		Bandwidth 40MHz		
Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	
L	500500	2502.5	501000	2505	501500	2507.5	502000	2510	502500	2512.5	503000	2515	504000	2520
M	507000	2535	507000	2535	507000	2535	507000	2535	507000	2535	507000	2535	507000	2535
H	513500	2567.5	513000	2565	512500	2562.5	512000	2560	511500	2557.5	511000	2555	510000	2550
NR Band 12														
Bandwidth 5MHz			Bandwidth 10MHz			Bandwidth 15MHz								
Ch. #	Freq. (MHz)		Ch. #	Freq. (MHz)		Ch. #	Freq. (MHz)							
L	140300	701.5	140800	704	141300	706.5								
M	141500	707.5	141500	707.5	141500	707.5								
H	142700	713.5	142200	711	141700	708.5								
NR Band 13														
Bandwidth 5MHz				Bandwidth 10MHz										
Ch. #	Freq. (MHz)			Ch. #	Freq. (MHz)									
L	155900	779.5			156400	782								
M	156400	782												
H	156900	784.5												
NR Band 14														
Bandwidth 5MHz				Bandwidth 10MHz										
Ch. #	Freq. (MHz)			Ch. #	Freq. (MHz)									
L	158100	790.5			158600	793								
M	158600	793												
H	159100	795.5												
NR Band 25														
Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz		Bandwidth 25MHz		Bandwidth 30MHz		Bandwidth 40MHz		
Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	
L	370500	1852.5	371000	1855	371500	1857.5	372000	1860	372500	1862.5	373000	1865	374000	1870
M	376500	1882.5	376500	1882.5	376500	1882.5	376500	1882.5	376500	1882.5	376500	1882.5	376500	1882.5
H	382500	1912.5	382000	1910	381500	1907.5	381000	1905	380500	1902.5	380000	1900	379000	1895
NR Band 26														
Bandwidth 5MHz			Bandwidth 10MHz			Bandwidth 15MHz			Bandwidth 20MHz					
Ch. #	Freq. (MHz)		Ch. #	Freq. (MHz)		Ch. #	Freq. (MHz)		Ch. #	Freq. (MHz)				
L	163300	816.5	163800	819	164300	821.5	164800	824						
M	166300	831.5	166300	831.5	166300	831.5	166300	831.5						
H	169300	846.5	168800	844	168300	841.5	167800	839						
NR Band 30														
Bandwidth 5MHz				Bandwidth 10MHz										
Ch. #	Freq. (MHz)			Ch. #	Freq. (MHz)									
L	461500	2307.5			462000	2310								
M	462000	2310												
H	462500	2312.5												



NR Band 38																						
	Bandwidth 10MHz			Bandwidth 15MHz			Bandwidth 20MHz			Bandwidth 30MHz			Bandwidth 40MHz									
	Ch. #	Freq. (MHz)		Ch. #	Freq. (MHz)		Ch. #	Freq. (MHz)		Ch. #	Freq. (MHz)		Ch. #	Freq. (MHz)								
L	515004	2575.02		515502	2577.51		516000	2580		517002	2585.01		518004	2590.02								
M	519000	2595		519000	2595		519000	2595		519000	2595		519000	2595								
H	522996	2614.98		522498	2612.49		522000	2610		520998	2604.99		519996	2599.98								
NR Band 41																						
	Bandwidth20MHz		Bandwidth30MHz		Bandwidth 40MHz		Bandwidth 50MHz		Bandwidth 60MHz		Bandwidth70MHz		Bandwidth 80MHz		Bandwidth 90MHz		Bandwidth100MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	501204	2506.02	502200	2511	503202	2516.01	504204	2521.02	505200	2526	506202	2531.01	507204	2536.02	508200	2541	509202	2546.01				
M	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99				
H	535998	2679.99	534996	2674.98	534000	2670	532998	2664.99	531996	2659.98	531000	2655	529998	2649.99	528996	2644.98	528000	2640				
NR Band 48																						
	Bandwidth10MHz			Bandwidth20MHz			Bandwidth30MHz			Bandwidth 40MHz												
	Ch. #	Freq. (MHz)		Ch. #	Freq. (MHz)		Ch. #	Freq. (MHz)		Ch. #	Freq. (MHz)											
L	637000	3555		637334	3560.01		637668	3565.02		638000	3570											
M	641666	3624.99		641666	3624.99		641666	3624.99		641666	3624.99											
H	646332	3694.98		646000	3690		645666	3684.99		645332	3679.98											
NR Band 66																						
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz		Bandwidth 30MHz		Bandwidth 40MHz											
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)										
L	342500	1712.5	343000	1715	343500	1717.5	344000	1720	345000	1725	346000	1730										
M	349000	1745	349000	1745	349000	1745	349000	1745	349000	1745	349000	1745										
H	355500	1777.5	355000	1775	354500	1772.5	354000	1770	353000	1765	352000	1760										
NR Band 71																						
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz															
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)														
L	133100	665.5	133600	668	134100	670.5	134600	673														
M	136100	680.5	136100	680.5	136100	680.5	136100	680.5														
H	139100	695.5	138600	693	138100	690.5	137600	688														
NR Band 77																						
	Bandwidth10MHz		Bandwidth15MHz		Bandwidth 20MHz		Bandwidth30MHz		Bandwidth 40MHz		Bandwidth 50MHz		Bandwidth 60MHz		Bandwidth 70MHz		Bandwidth 80MHz		Bandwidth 90MHz		Bandwidth100MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	647000	3705	647168	3707.52	647334	3710.01	647668	3715.02	648000	3720	648334	3725.01	648668	3730.02	649000	3735	649334	3740.01	649668	3745.02	650000	3750
M	656000	3840	656000	3840	656000	3840	656000	3840	656000	3840	656000	3840	656000	3840	656000	3840	656000	3840	656000	3840	656000	3840
H	665000	3975	664832	3972.48	664666	3969.99	664332	3964.98	664000	3960	663666	3954.99	663332	3949.98	663000	3945	662666	3939.99	662332	3934.98	662000	3930
NR Band 78																						
	Bandwidth10MHz		Bandwidth15MHz		Bandwidth 20MHz		Bandwidth30MHz		Bandwidth 40MHz		Bandwidth 50MHz		Bandwidth 60MHz		Bandwidth 70MHz		Bandwidth 80MHz		Bandwidth 90MHz		Bandwidth100MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	647000	3705	647168	3707.52	647334	3710.01	647668	3715.02	648000	3720	648334	3725.01	648668	3730.02	649000	3735	649334	3740.01	649668	3745.02	650000	3750
M	650000	3750	650000	3750	650000	3750	650000	3750	650000	3750	650000	3750	650000	3750	650000	3750	650000	3750	650000	3750		
H	653000	3795	652832	3792.48	652666	3789.99	652332	3784.98	652000	3780	651666	3774.99	651332	3769.98	651000	3765	650666	3759.99	650332	3754.98		
NR Band 77/78(3450MHz ~ 3550MHz)																						
	Bandwidth10MHz		Bandwidth15MHz		Bandwidth 20MHz		Bandwidth30MHz		Bandwidth 40MHz		Bandwidth 50MHz		Bandwidth 60MHz		Bandwidth 70MHz		Bandwidth 80MHz		Bandwidth 90MHz		Bandwidth100MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	630334	3455.01	630500	3457.5	630668	3460.02	631000	3465	631334	3470.01	631668	3475.02	632000	3480	632334	3485.01	632668	3490.02	633000	3495	633332	3499.98
M	633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98	633332	3499.98		
H	636332	3544.98	636166	3542.49	636000	3540	635666	3534.99	635332	3529.98	635000	3525	634666	3519.99	634332	3514.98	634000	3510	633666	3504.99		


4. Proximity Sensor Triggering Test

<Proximity Sensor Triggering Distance (KDB 616217 D04 section 6.2)>:

For the device is fully integrated, touch sensing capacitive sensor. It uses a charge transfer capacitive acquisition method that is capable of near range proximity detection. In this device offers a state of the art capacitive sensing engine with an embedded sampling capacitor and voltage regulator allowing the overall solution cost to be reduced and improving system immunity in noisy environments.

Proximity sensor triggering distance testing was performed according to the procedures outlined in KDB 616217 D04 section 6.2, and EUT moving further away from the flat phantom and EUT moving toward the flat phantom were both assessed. The details are illustrated as following, and the shortest triggering distances were reported and used for SAR assessment.

In the preliminary triggering distance testing, the tissue-equivalent medium for different frequency bands were used for verification; no other frequency bands tissue-equivalent medium was found to result in shortest triggering distance than that for 1900MHz, and the tissue-equivalent medium for 1900MHz was used for formal proximity sensor triggering testing.

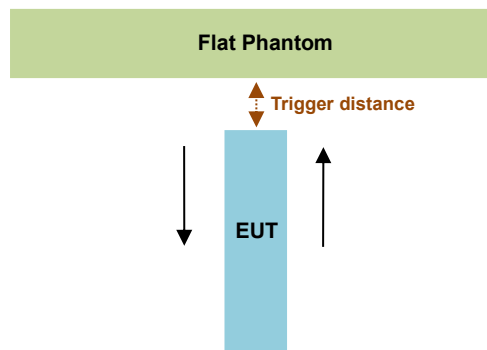

Main Antenna								
Proximity Sensor Trigger Distance (mm)								
Position	Bottom of Laptop		Bottom Face		Edge 1		Edge 2	
	moving toward	moving away	moving toward	moving away	moving toward	moving away	moving toward	moving away
Minimum	31	30	27	27	28	37	17	16

MIMO 2 Antenna								
Proximity Sensor Trigger Distance (mm)								
Position	Bottom of Laptop		Bottom Face		Edge 1		Edge 4	
	moving toward	moving away	moving toward	moving away	moving toward	moving away	moving toward	moving away
Minimum	19	18	20	22	30	29	23	23


Aux Antenna								
Proximity Sensor Trigger Distance (mm)								
Position	Bottom of Laptop		Bottom Face		Edge 1		Edge 4	
	moving toward	moving away	moving toward	moving away	moving toward	moving away	moving toward	moving away
Minimum	37	37	35	34	30	29	26	26

<Proximity Sensor Triggering Coverage (KDB 616217 D04 section 6.3)>:

Since the antenna and sensor are collocated and all of the peak SAR location is overlapping with the sensor pad for this device, therefore, According to KDB 616217 section6.3, these procedures do not apply and are not required for this device. Due to the antenna and sensor are collocated and the peak SAR location is overlapping with the sensor on this device.

<Tablet Tilt angle influences to proximity sensor triggering (KDB 616217 D04 section 6.4)>:

The influence of table tilt angles to proximity sensor triggering was determined by positioning each tablet edge that contains a transmitting antenna, perpendicular to the flat phantom, at above separation distance. Rotating the tablet around the edge next to the phantom in $\leq 10^\circ$ increments until the tablet is $\pm 45^\circ$ from the vertical position at 0° , and the maximum output power remains in the reduced mode.

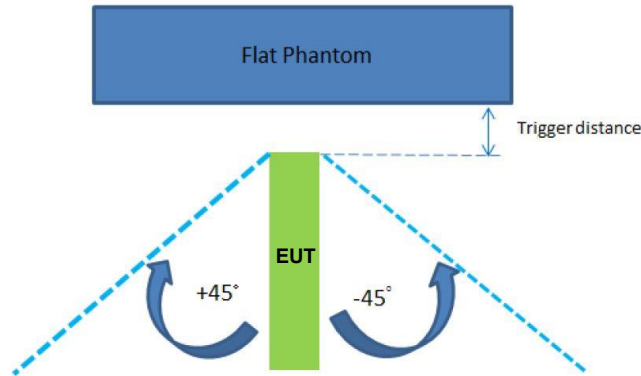

Main Antenna				
The Sensor Trigger Distance (mm)				
Position	Edge 1		Edge 2	
	+45	-45	+45	-45
Minimum	25	37	13	14

MIMO 2 Antenna				
The Sensor Trigger Distance (mm)				
Position	Edge 1		Edge 4	
	+45	-45	+45	-45
Minimum	23	29	24	23

Aux Antenna				
The Sensor Trigger Distance (mm)				
Position	Edge 1		Edge 4	
	+45	-45	+45	-45
Minimum	23	29	26	27

Proximity sensor power reduction

Exposure Position / wireless mode		Bottom of Laptop/ Bottom Face/ Edge 1/Edge 2/Edge 4 ⁽¹⁾
WCDMA II	Main	10.5 dB
WCDMA IV	Main	10.0 dB
WCDMA V	Main	8.0 dB
LTE Band 2	Main	10.5 dB
LTE Band 4	Main	10.0 dB
LTE Band 5	Main	7.0 dB
LTE Band 7	Main	12.5 dB
LTE Band 12	Main	8.5 dB
LTE Band 17	Main	8.5 dB
LTE Band 13	Main	6.0 dB
LTE Band 14	Main	6.0 dB
LTE Band 25	Main	10.5 dB
LTE Band 26	Main	7.0 dB
LTE Band 30	Main	9.5 dB
LTE Band 38	Main	11.0 dB
LTE Band 41	Main	11.0 dB
LTE Band 41(HPUE)	Main	11.0 dB
LTE Band 42	Main	9.5 dB
LTE Band 48	Main	9.5 dB
LTE Band 66	Main	10.0 dB
LTE Band 71	Main	9.0 dB
FR1 n2	Main	10.0 dB
FR1 n5	Main	7.0 dB
FR1 n7	Main	11.5 dB
FR1 n12	Main	8.5 dB
FR1 n13	Main	6.0 dB
FR1 n14	Main	6.0 dB
FR1 n25	Main	10.0 dB
FR1 n26	Main	7.0 dB
FR1 n30	Main	10.0 dB
FR1 n38	Main	16.0 dB
FR1 n41	Main	16.0 dB
FR1 n41 HPUE	Main	15.5 dB
FR1 n48	Main	13.5 dB
FR1 n66	Main	9.5 dB
FR1 n71	Main	8.5 dB
FR1 n77	Main	17.0 dB
FR1 n77_HPUE	Main	16.5 dB
FR1 n78	Main	17.0 dB
FR1 n78_HPUE	Main	16.5 dB



Exposure Position / wireless mode		Bottom of Laptop/ Bottom Face/ Edge 1/Edge 2/Edge 4 ⁽¹⁾
LTE Band 2	MIMO2	11.5 dB
LTE Band 4	MIMO2	11.0 dB
LTE Band 7	MIMO2	14.5 dB
LTE Band 25	MIMO2	11.5 dB
LTE Band 30	MIMO2	11.5 dB
LTE Band 38	MIMO2	12.5 dB
LTE Band 41	MIMO2	12.5 dB
LTE Band 42	MIMO2	11.0 dB
LTE Band 43	MIMO2	11.0 dB
LTE Band 48	MIMO2	10.5 dB
LTE Band 66	MIMO2	11.0 dB
FR1 n2	MIMO2	11.0 dB
FR1 n7	MIMO2	15.5 dB
FR1 n25	MIMO2	11.0 dB
FR1 n30	MIMO2	12.0 dB
FR1 n38	MIMO2	15.0 dB
FR1 n41	MIMO2	15.0 dB
FR1 n41_HPUE	MIMO2	15.5 dB
FR1 n48	MIMO2	13.5 dB
FR1 n66	MIMO2	11.0 dB
FR1 n77	MIMO2	17.0 dB
FR1 n77_HPUE	MIMO2	16.5 dB
FR1 n78	MIMO2	17.0 dB
FR1 n78_HPUE	MIMO2	16.5 dB
FR1 n38	AUX	16.0 dB
FR1 n41	AUX	16.0 dB
FR1 n41_HPUE	AUX	15.5 dB
FR1 n48	AUX	13.5 dB
FR1 n77	AUX	17.0 dB
FR1 n77_HPUE	AUX	16.5 dB
FR1 n78	AUX	17.0 dB
FR1 n78_HPUE	AUX	16.5 dB



Remark:



1. ⁽¹⁾: Reduced maximum limit applied by activation of proximity sensor.
2. Tests were performed in accordance with KDB 616217 D04 section 6.1, 6.2, 6.3, 6.4 and 6.5 and compliant results are shown as below.
3. For verification of compliance of power reduction scheme, additional SAR testing with EUT transmitting at full RF power at a conservative trigger distance was performed:
 - (a) **Main**
 - Bottom of Laptop: [25 mm](#)
 - Bottom Face: [25 mm](#)
 - Edge 1: [24 mm](#)
 - Edge 2: [12 mm](#)
 - (b) **MIMO 2**
 - Bottom of Laptop: [17 mm](#)
 - Bottom Face: [19 mm](#)
 - Edge 1: [22 mm](#)
 - Edge 4: [22 mm](#)
 - (c) **Aux**
 - Bottom of Laptop: [25 mm](#)
 - Bottom Face: [25 mm](#)
 - Edge 1: [22 mm](#)
 - Edge 4: [25 mm](#)



Power Measurement during Sensor Trigger distance testing

<Main Antenna>

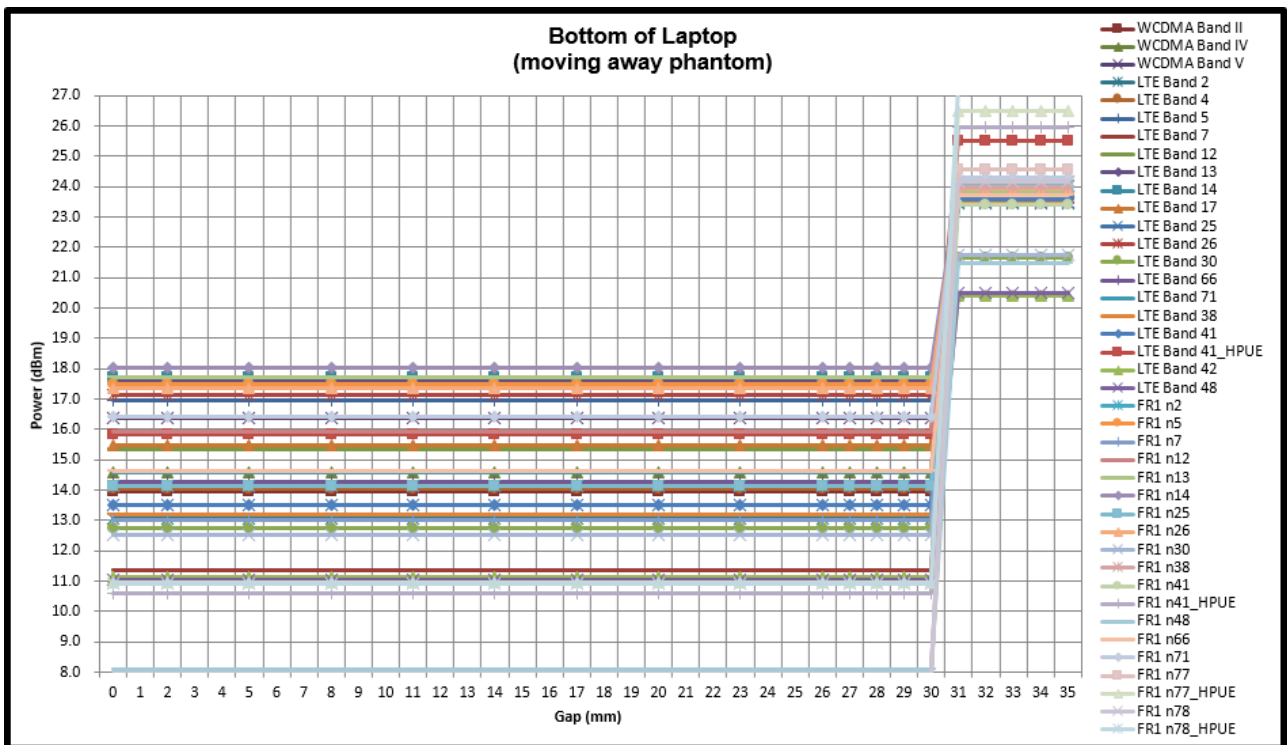
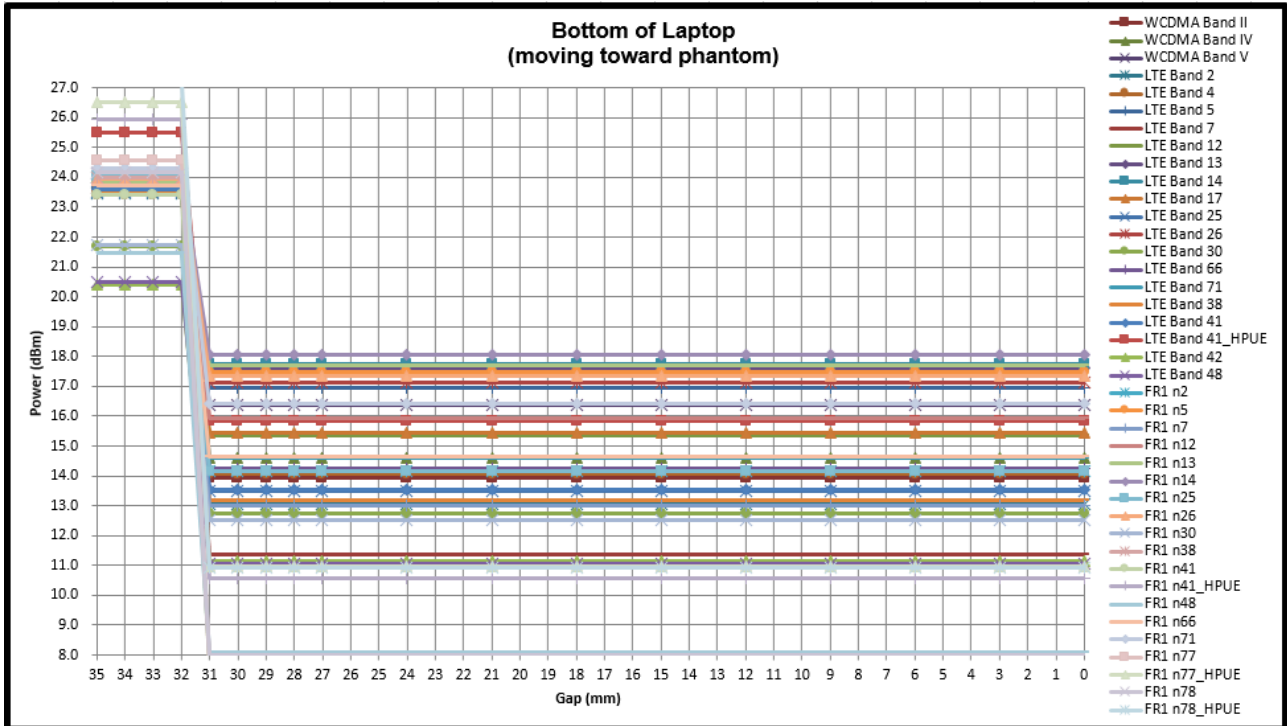


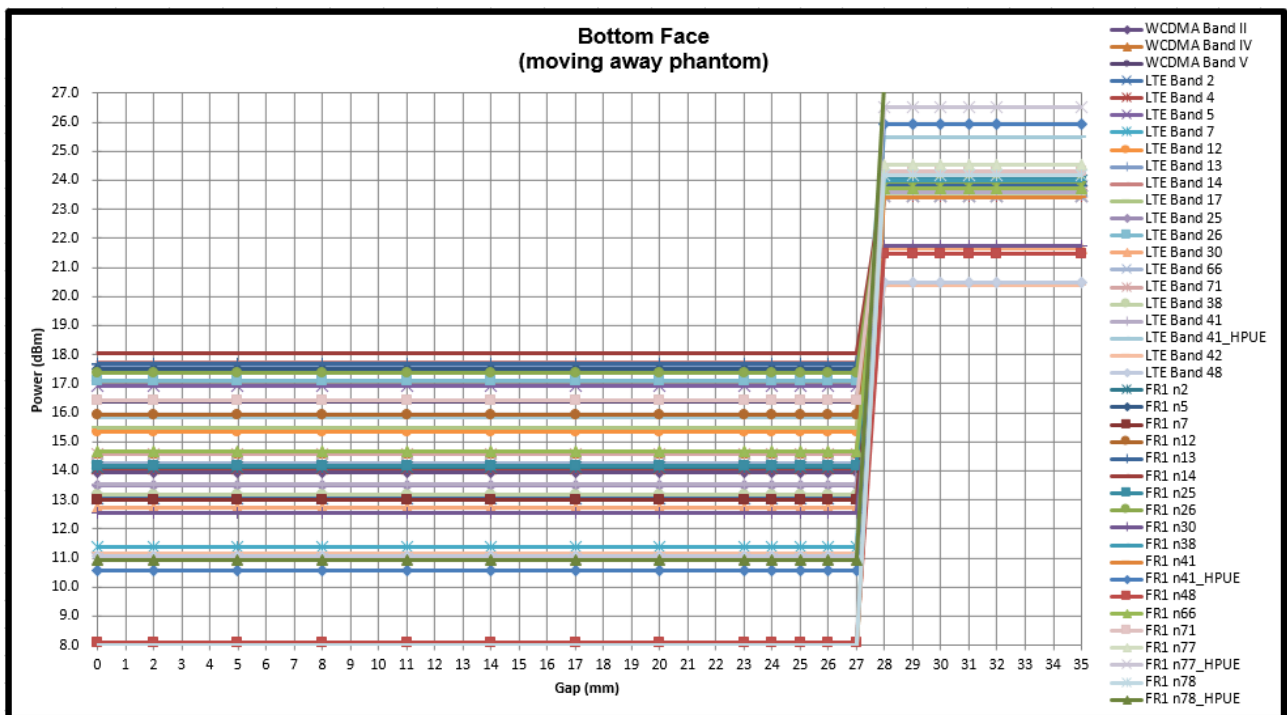
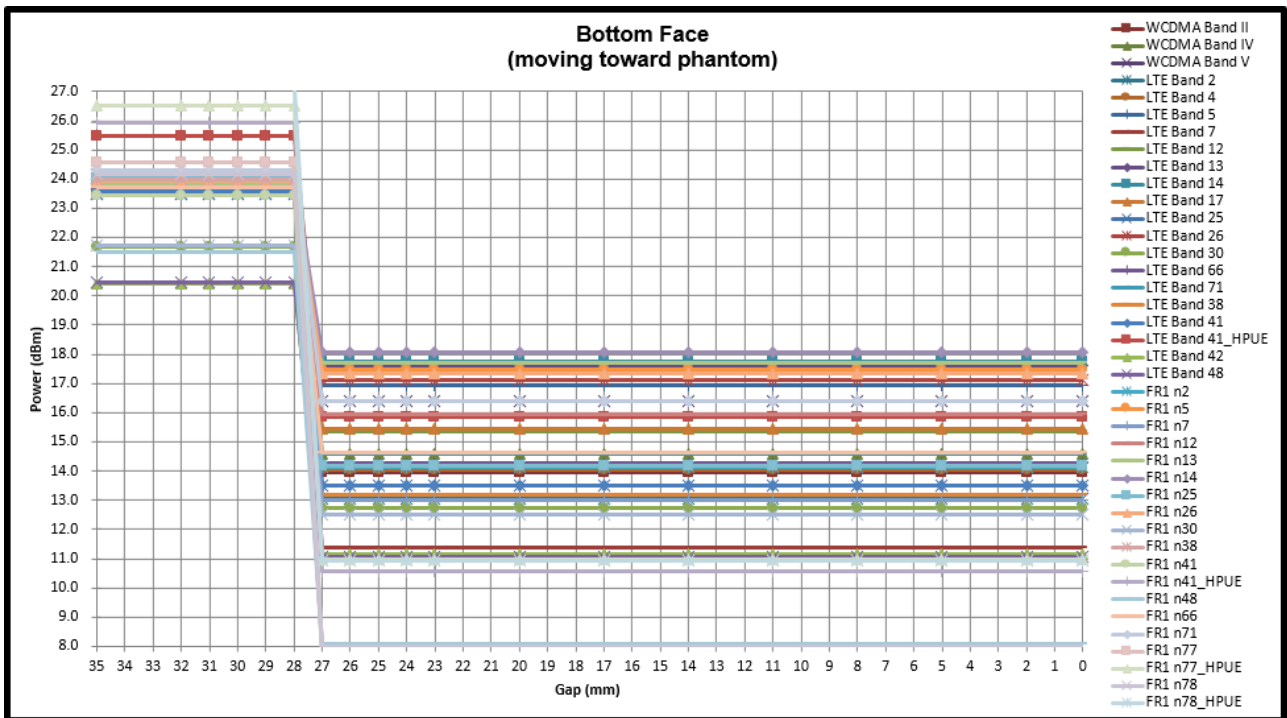


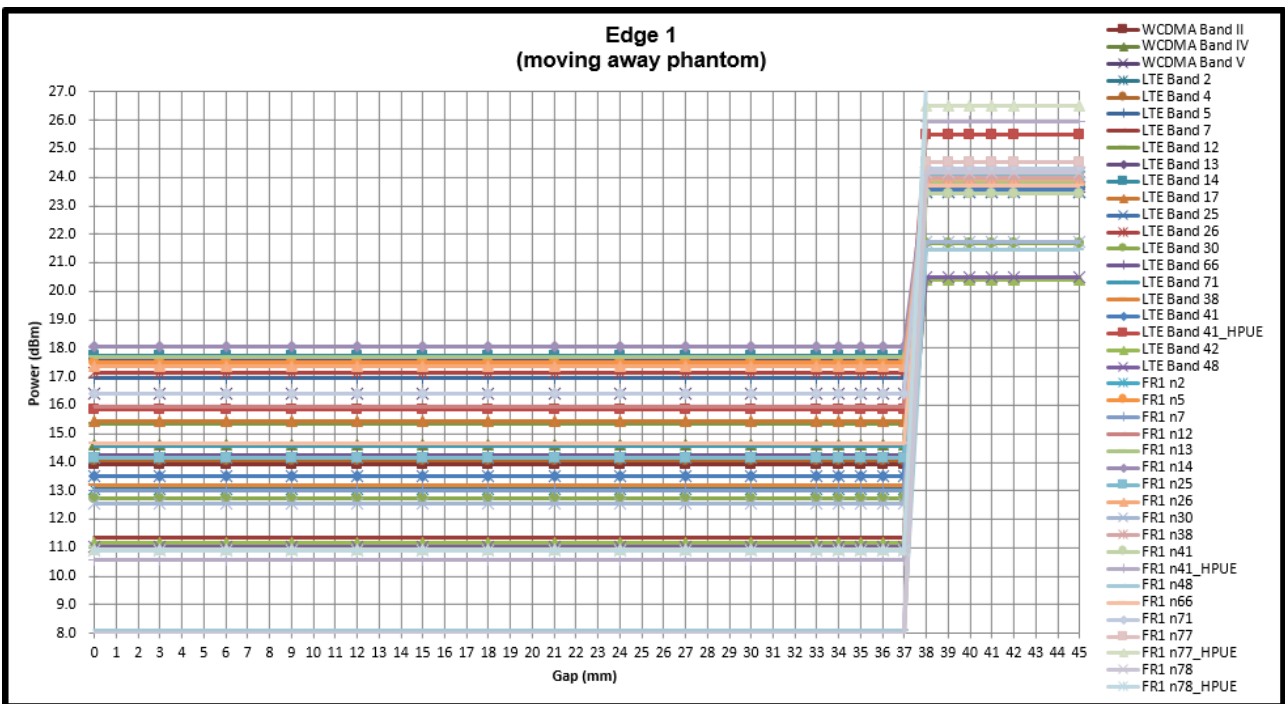
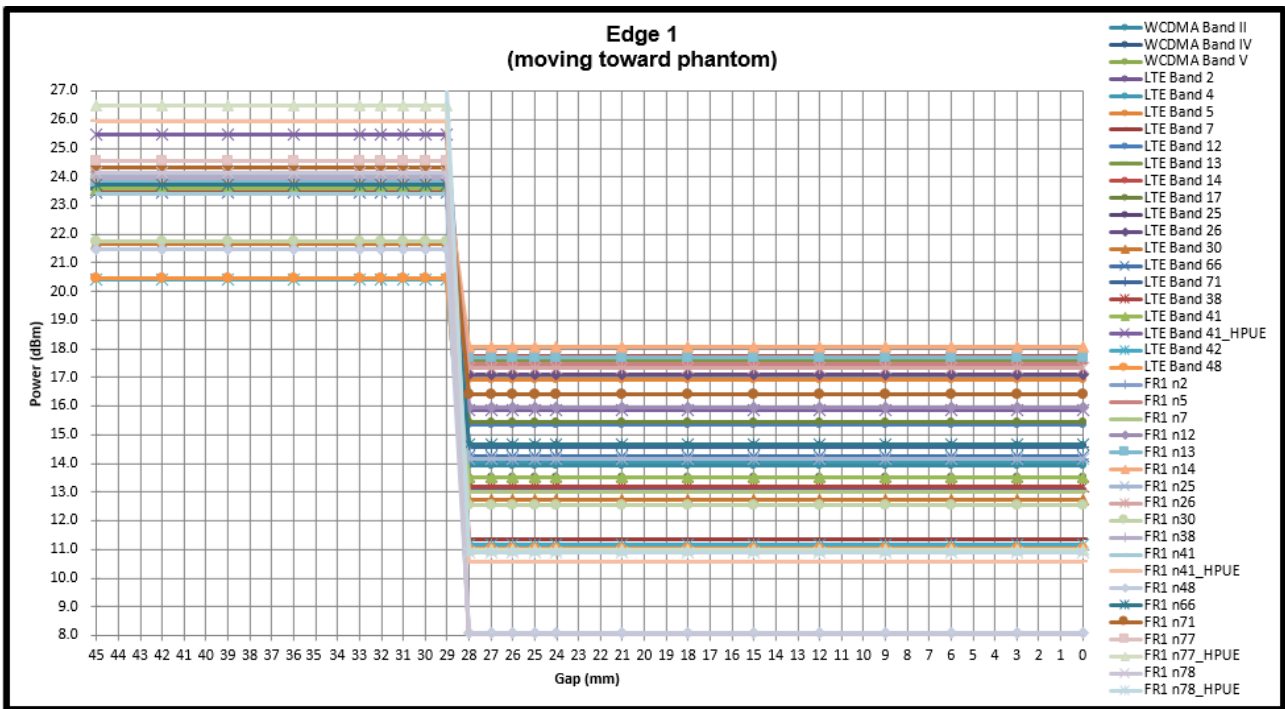


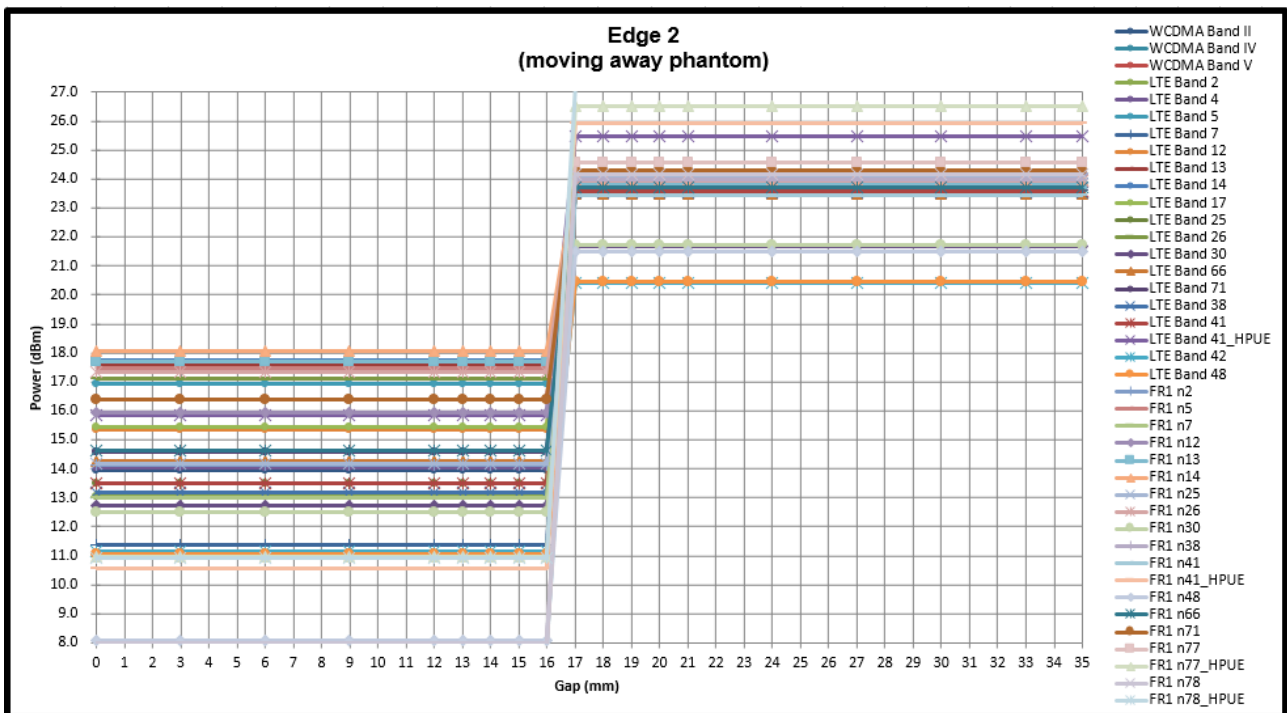
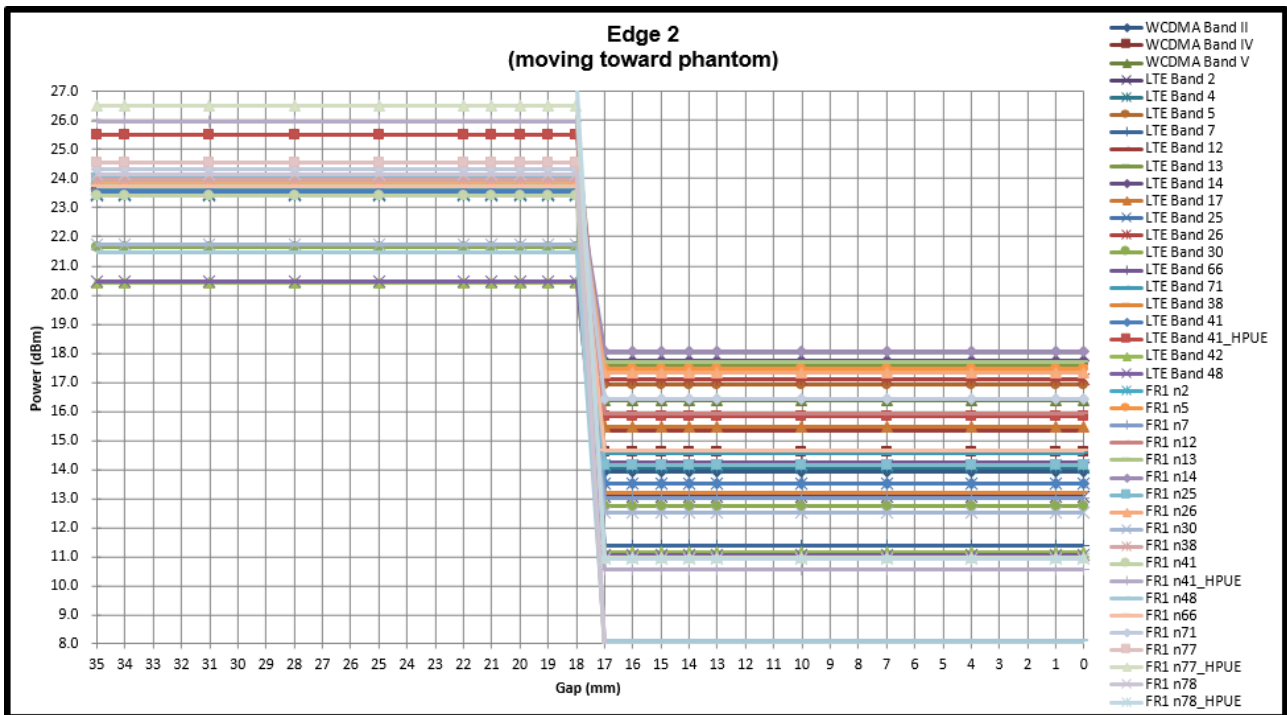


<MIMO 2 Antenna>

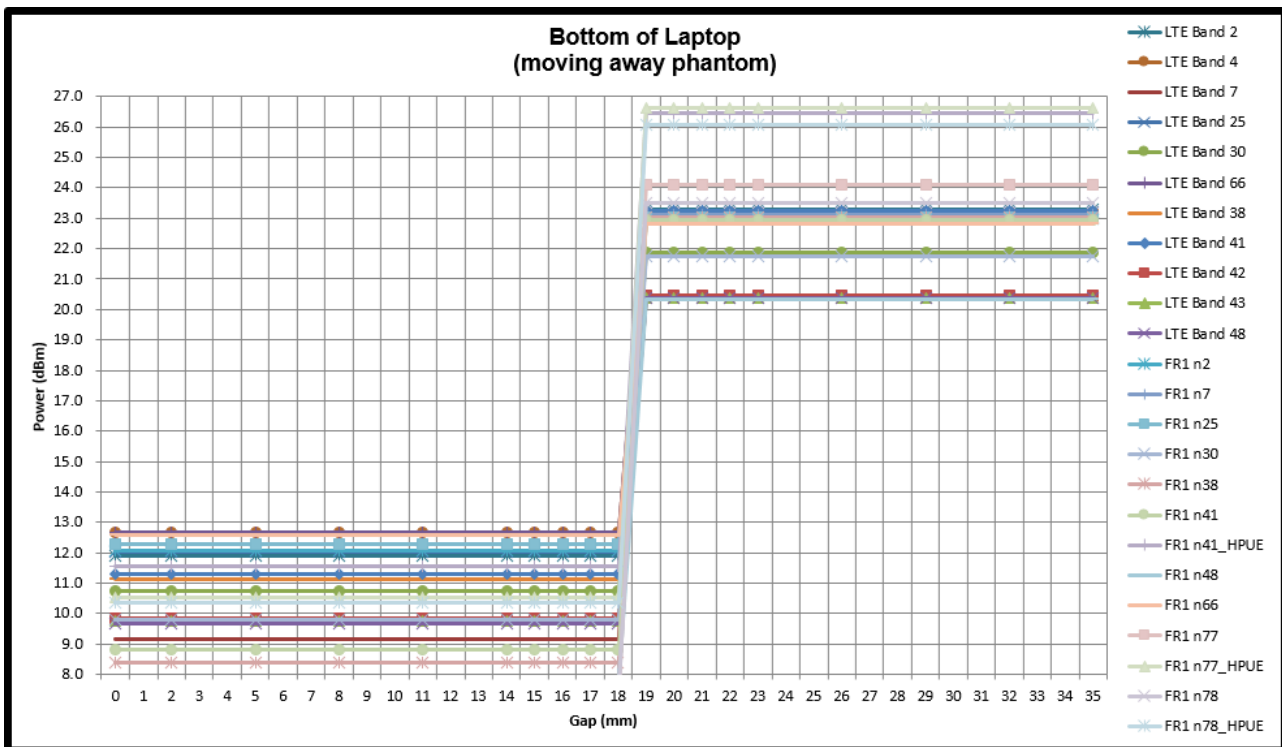
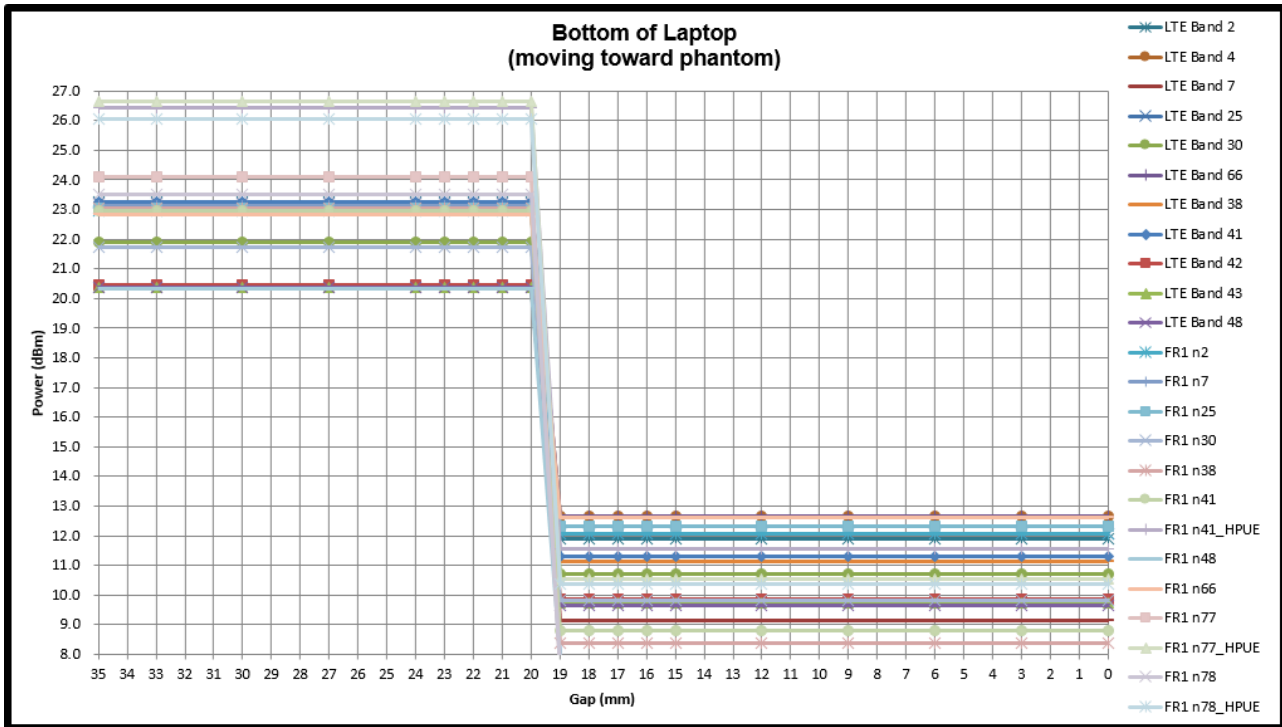


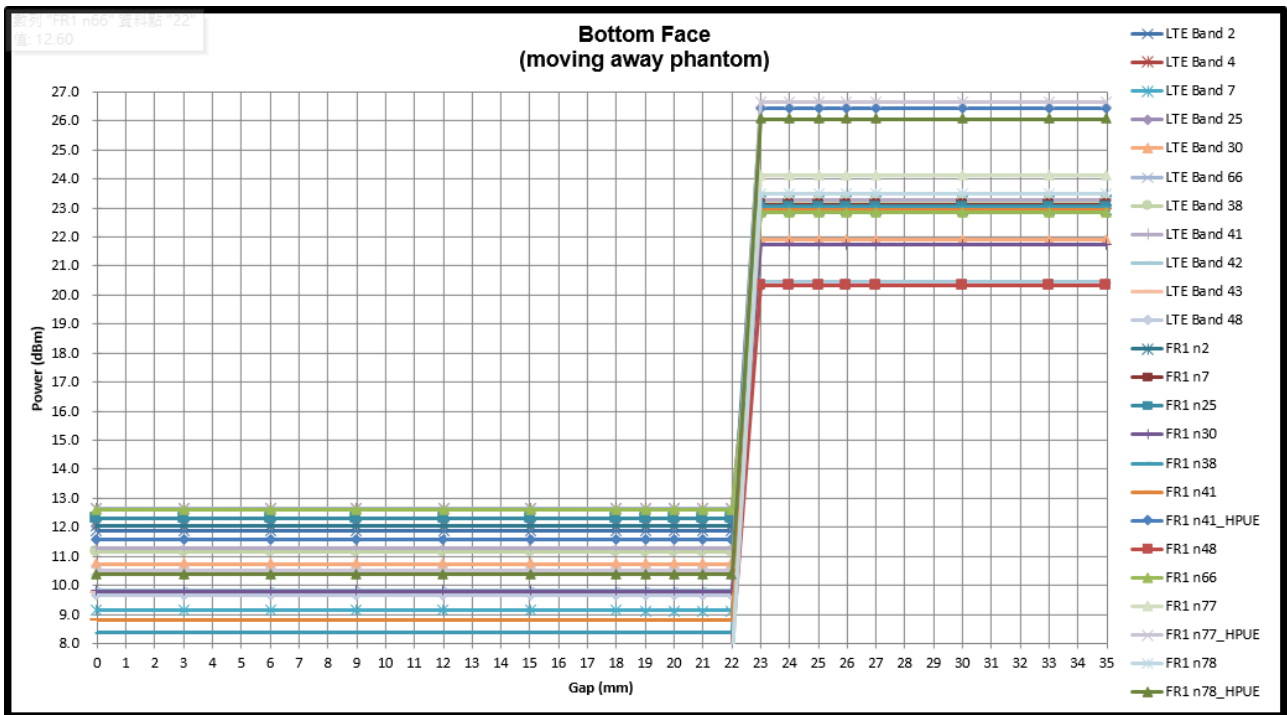
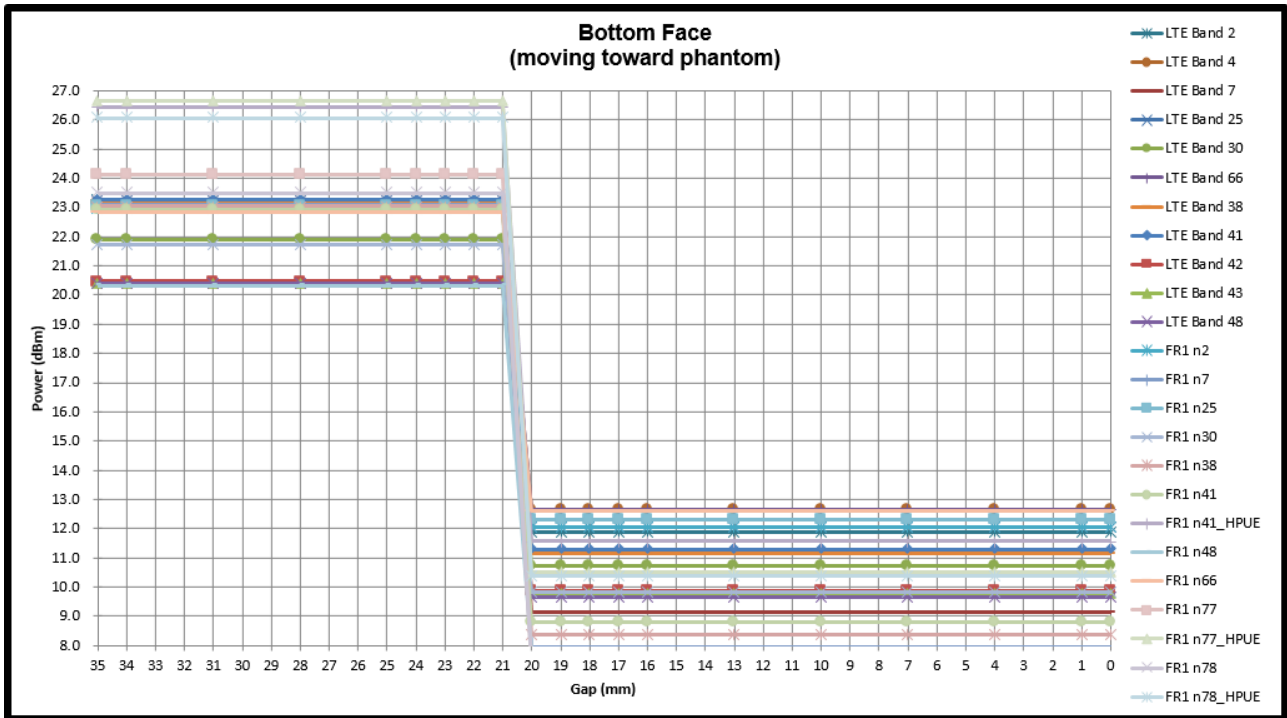


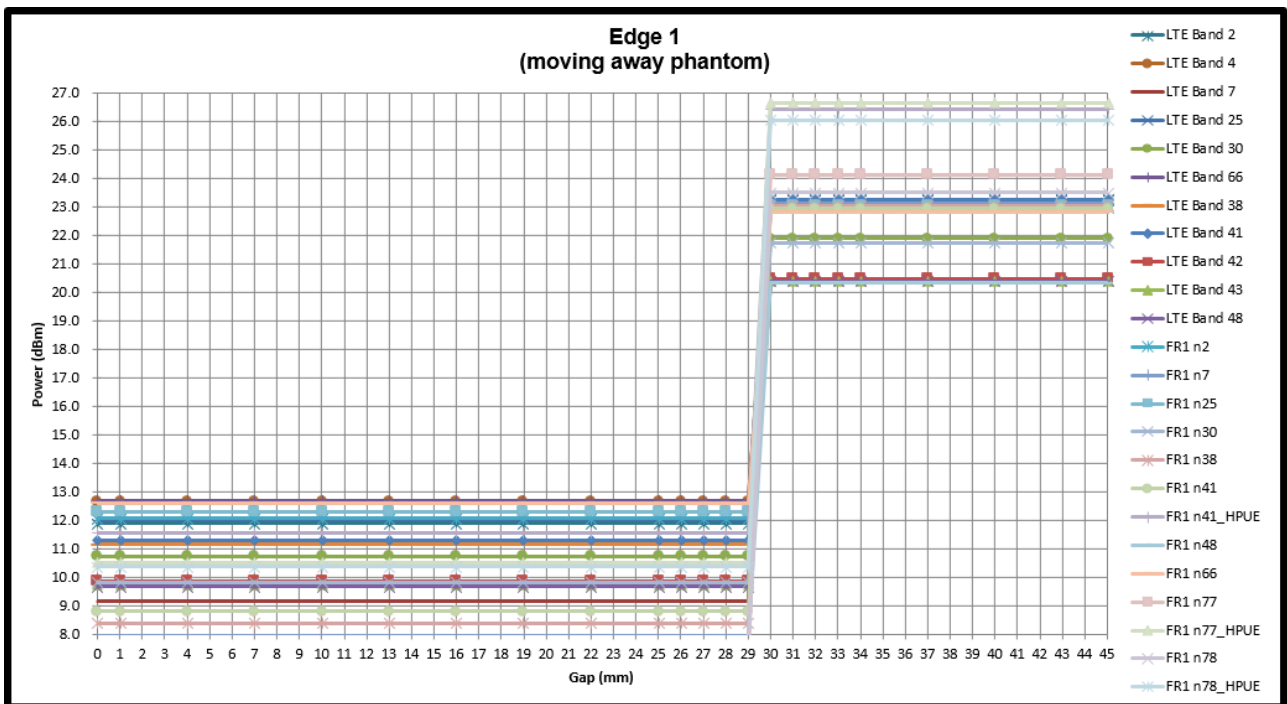
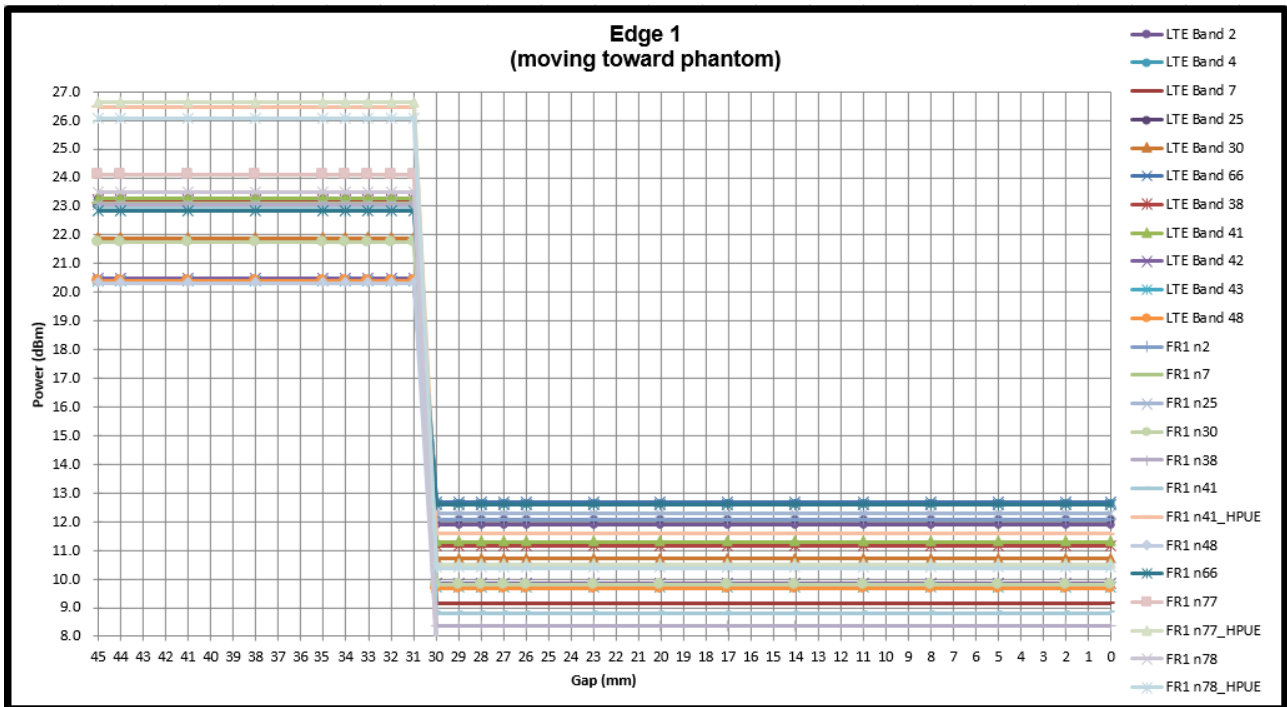


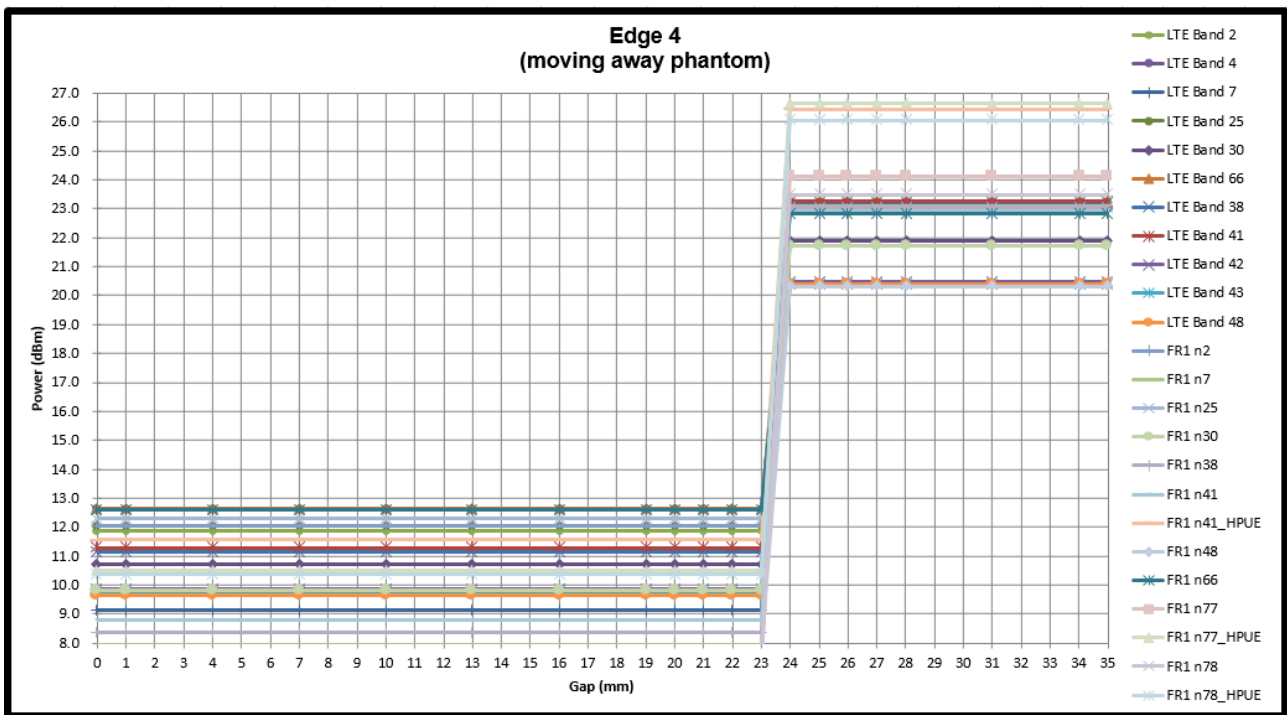
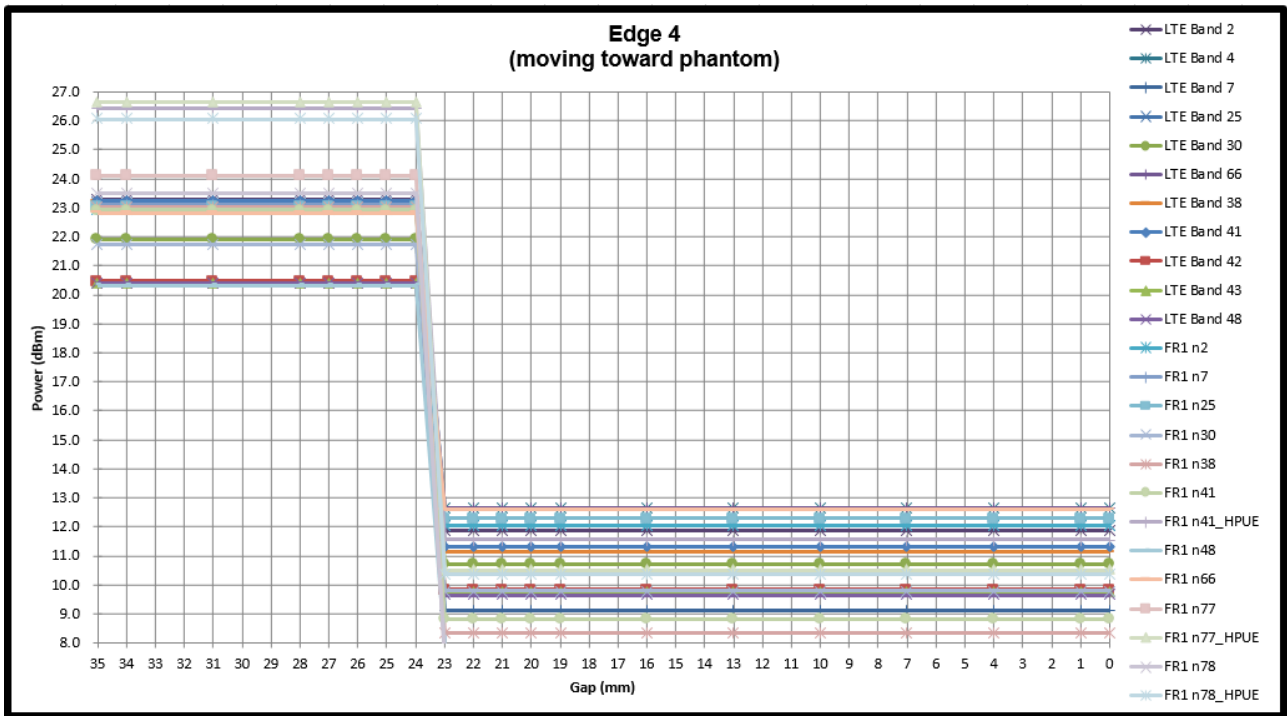


<Aux Antenna>

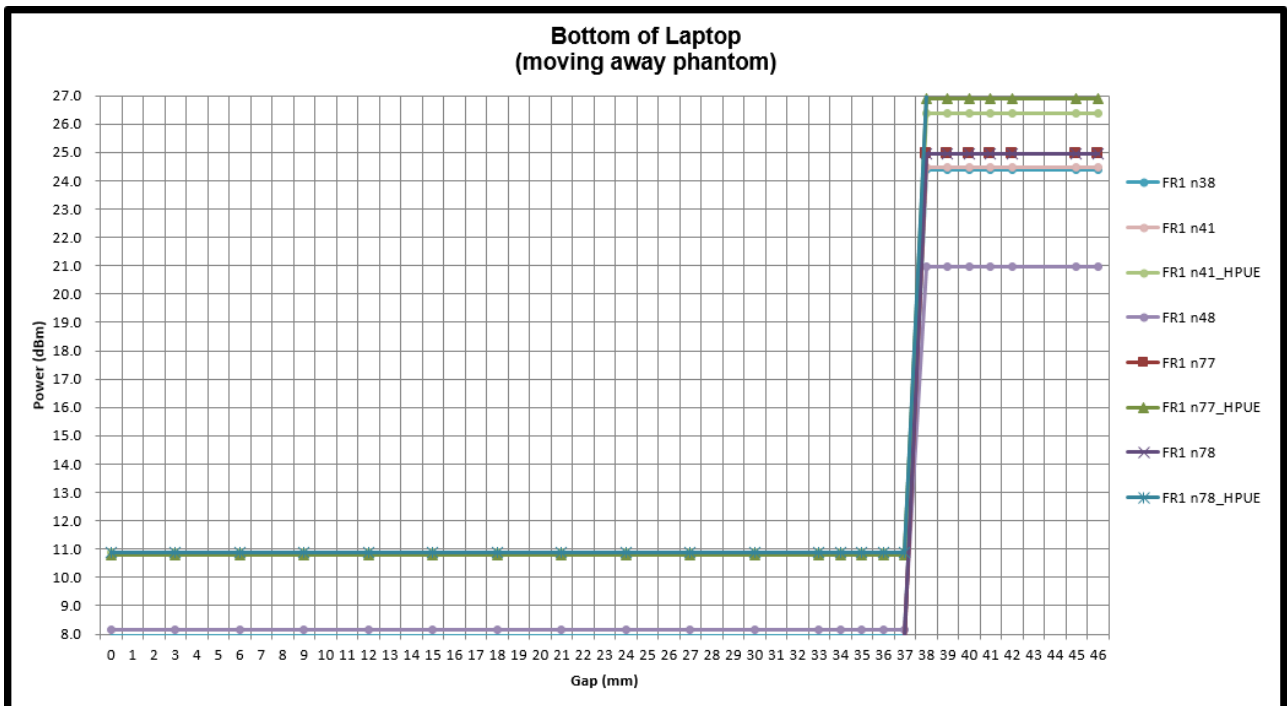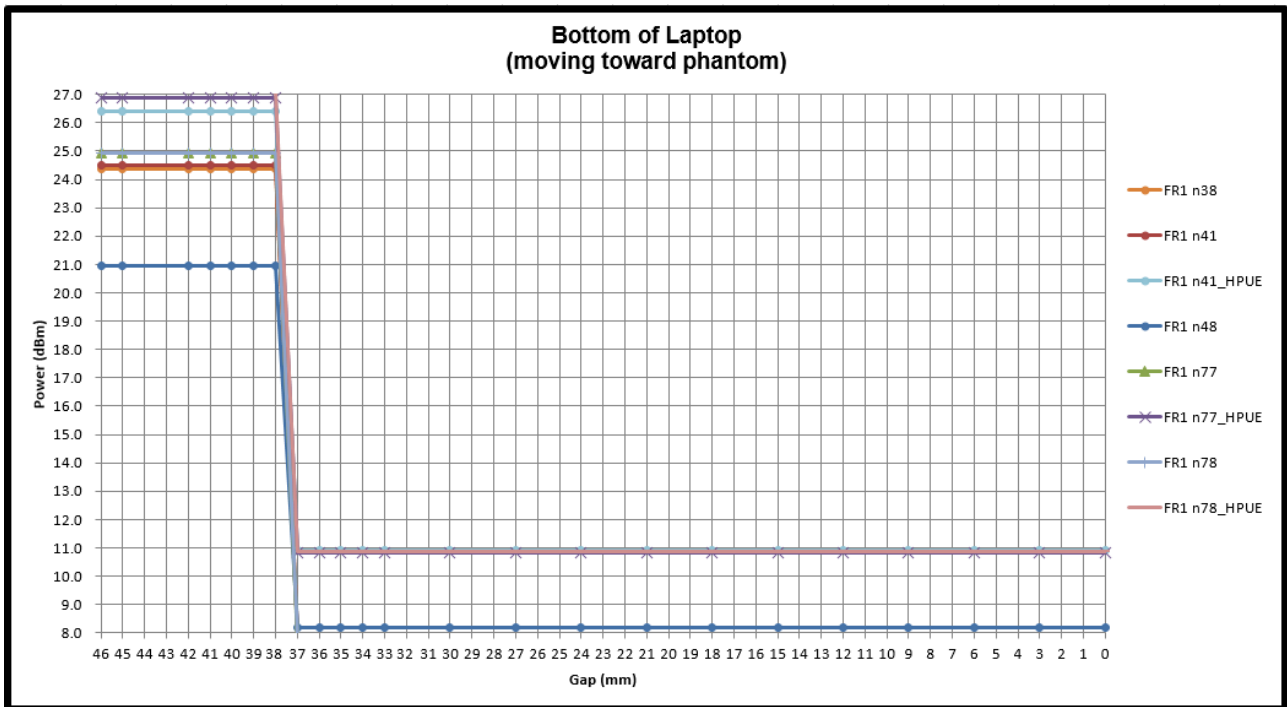

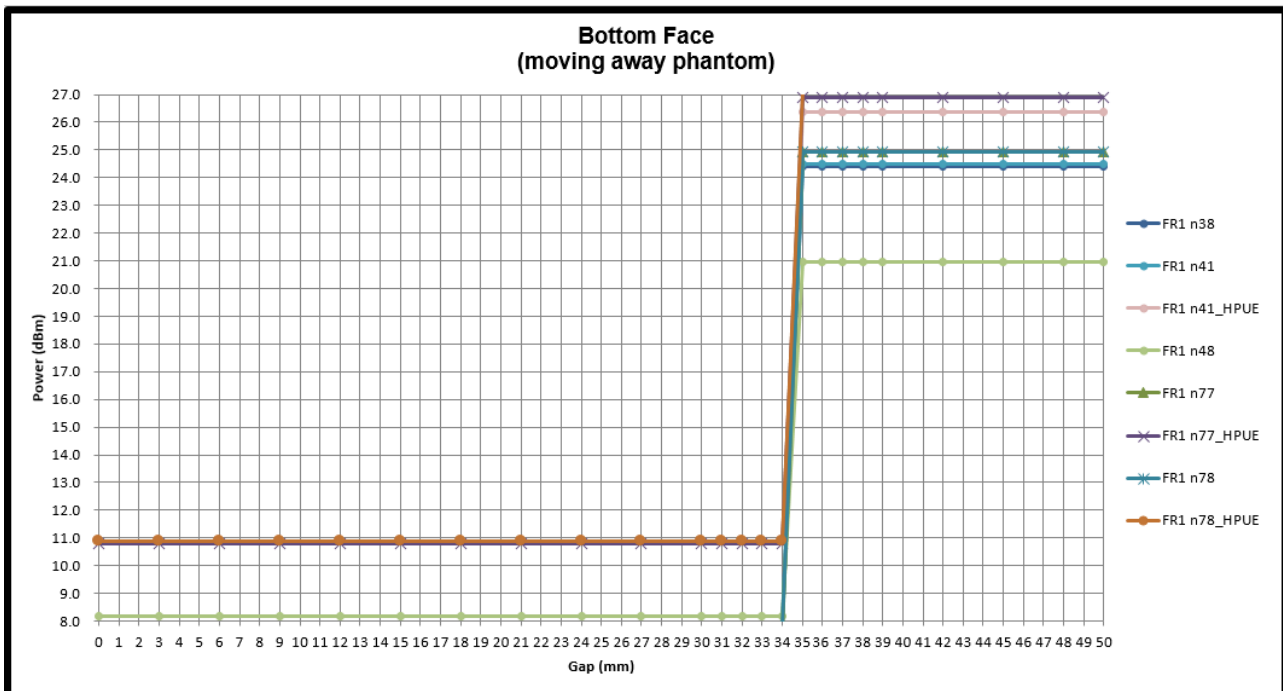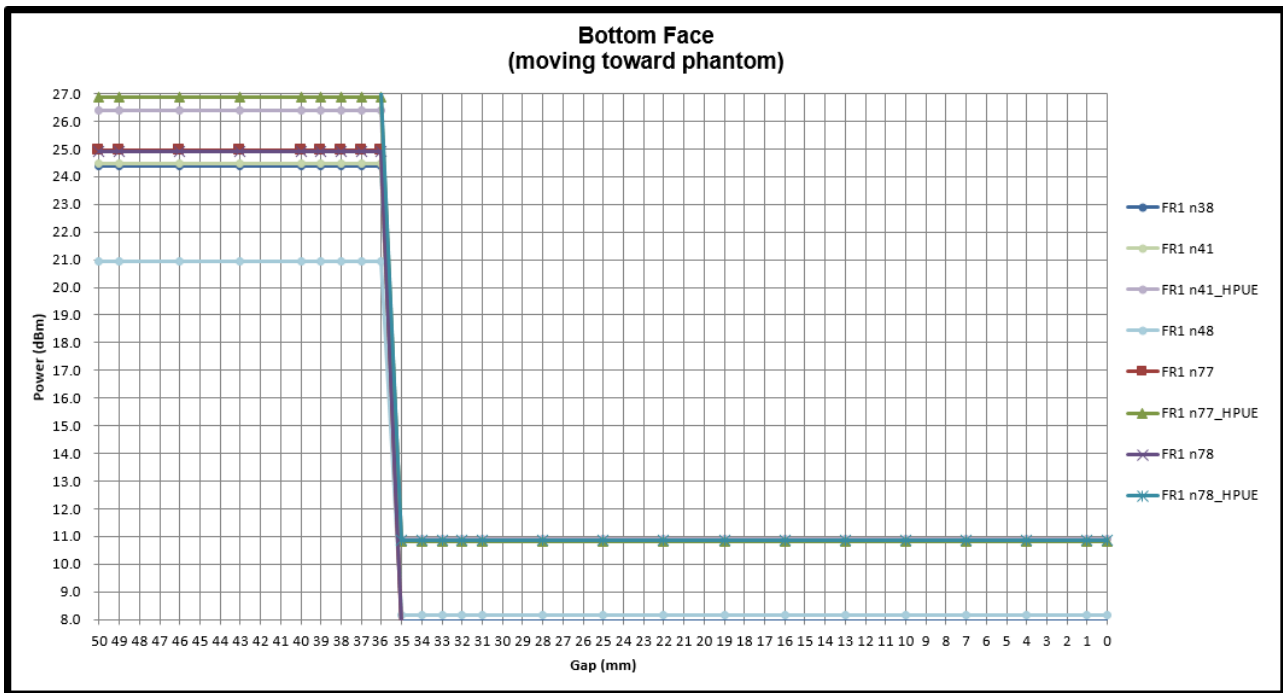

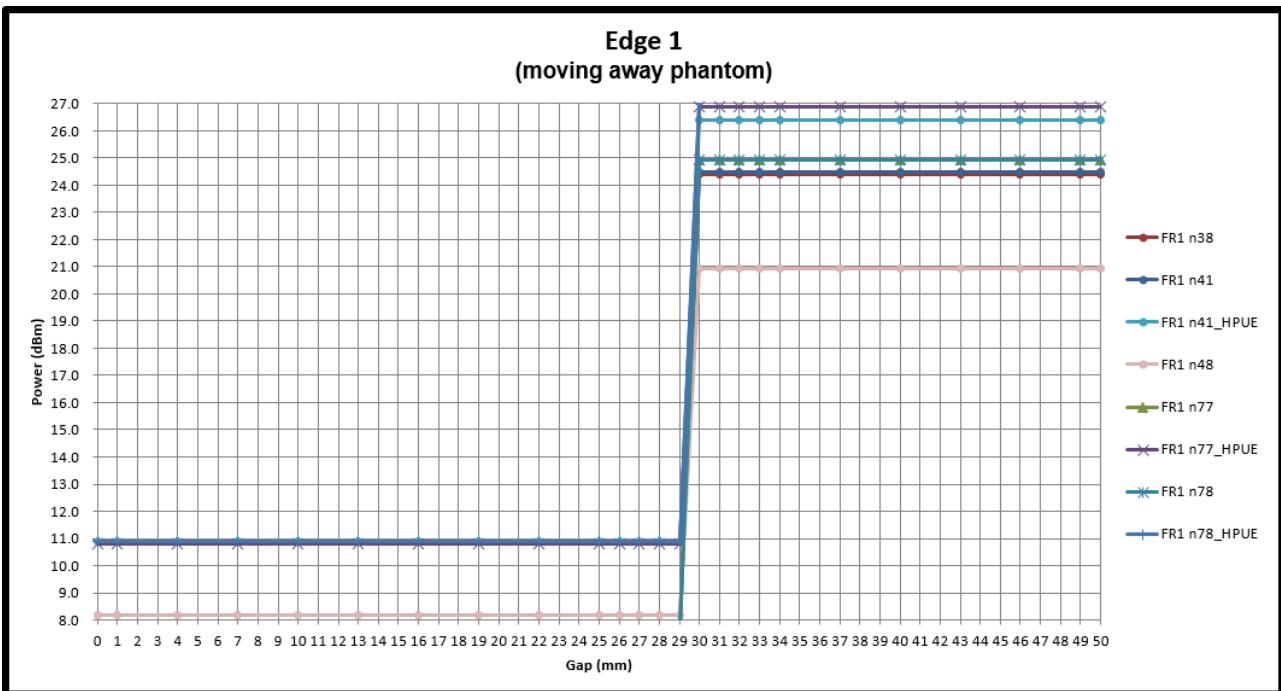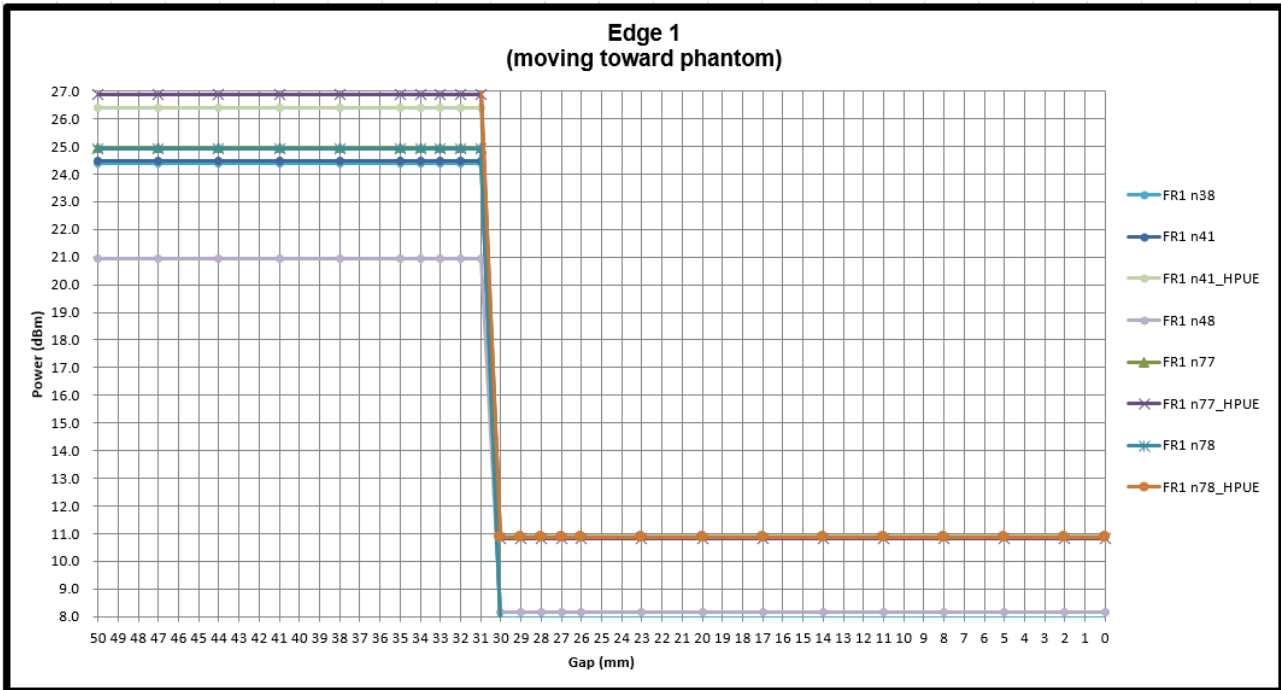

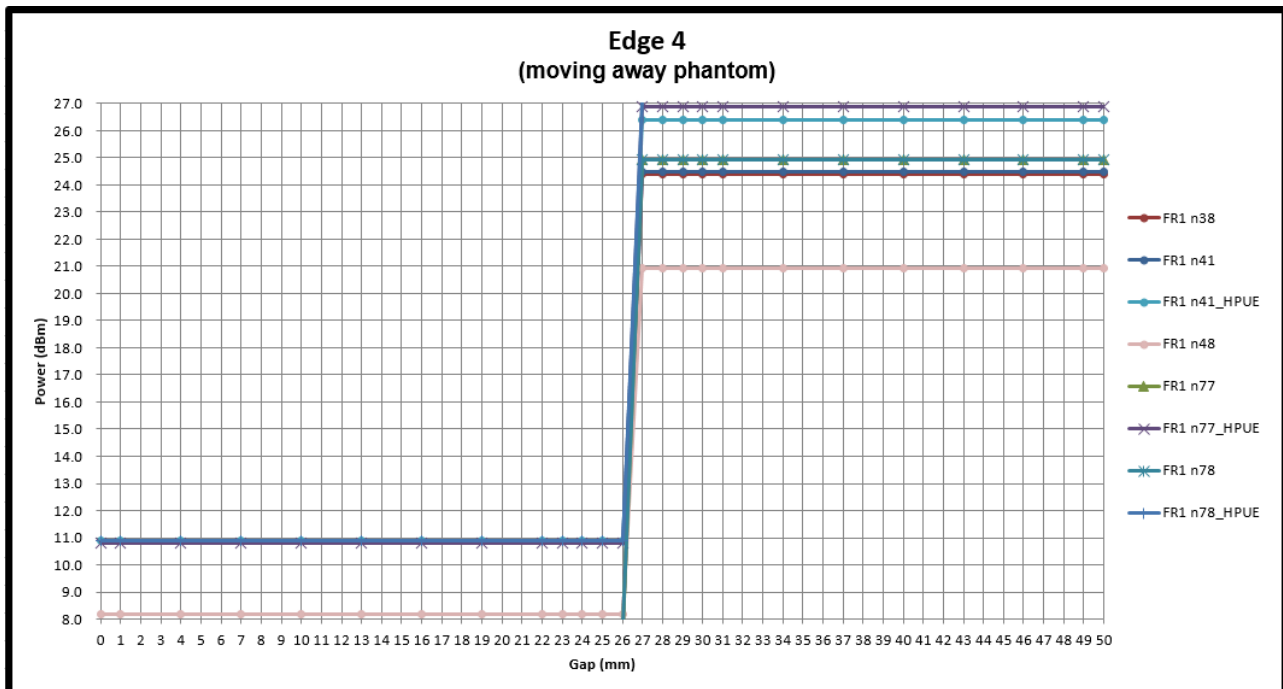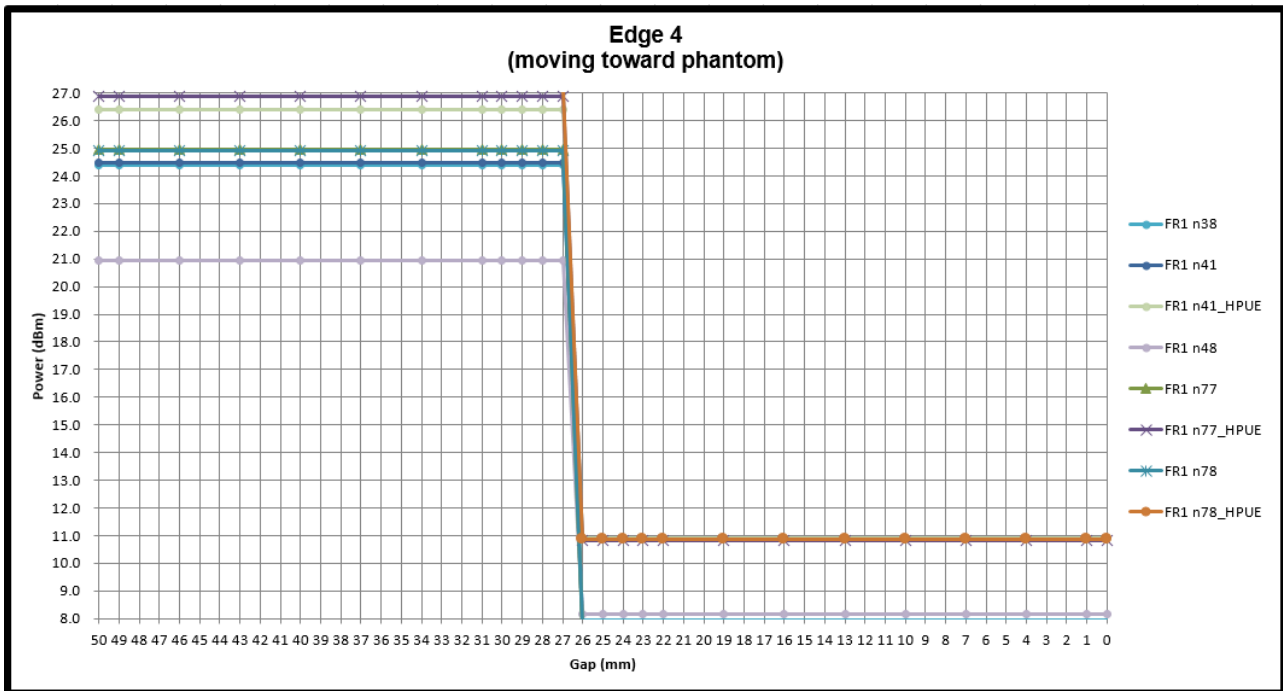

5. RF Exposure Limits

5.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

5.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

6. Specific Absorption Rate (SAR)

6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

7. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

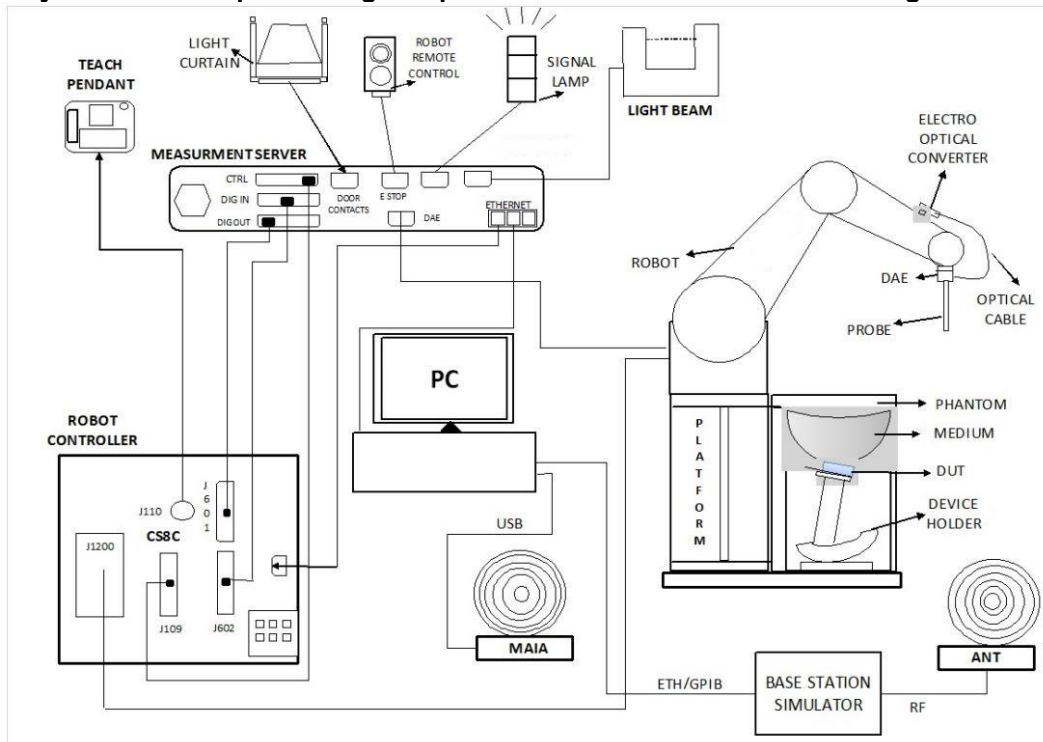

- The DASY system in SAR Configuration is shown above
- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running windows software and the DASY software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

7.1 Test Site Location


The SAR measurement facilities used to collect data are within both Sporton Lab list below test site location are accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190 and 3786) and the FCC designation No. TW1190 and TW3786 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test.

Test Site	EMC & Wireless Communications Laboratory		Wensan Laboratory		
Test Site Location	TW1190 No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333		TW3786 No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010		
Test Site No.	SAR01-HY	SAR03-HY	SAR08-HY	SAR09-HY	SAR15-HY
	SAR04-HY	SAR05-HY	SAR11-HY	SAR12-HY	SAR16-HY
	SAR06-HY	SAR10-HY	SAR13-HY	SAR14-HY	SAR17-HY
	-	-	SAR19-HY	SAR20-HY	SAR21-HY


7.2 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG).The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<ES3DV3 Probe>

Construction	Symmetric design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	4 MHz – 4 GHz; Linearity: ± 0.2 dB (30 MHz – 4 GHz)	
Directivity	± 0.2 dB in TSL (rotation around probe axis) ± 0.3 dB in TSL (rotation normal to probe axis)	
Dynamic Range	5 μ W/g – >100 mW/g; Linearity: ± 0.2 dB	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 3.9 mm (body: 12 mm) Distance from probe tip to dipole centers: 3.0 mm	

<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	4 MHz – >6 GHz Linearity: ± 0.2 dB (30 MHz – 6 GHz)	
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 μ W/g – >100 mW/g Linearity: ± 0.2 dB (noise: typically <1 μ W/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

7.3 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.


The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Fig 5.1 Photo of DAE


7.4 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

7.5 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

8. Measurement Procedures

The measurement procedures are as follows:

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

8.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

8.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

8.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: $\Delta x_{Area}, \Delta y_{Area}$	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

8.4 Zoom Scan

Zoom scans are used assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube shoes base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

		≤ 3 GHz	> 3 GHz	
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm	
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm	
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

8.5 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

8.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



9. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit ⁽²⁾	D750V3	1107	Jun. 22, 2022	Jun. 20, 2024
SPEAG	835MHz System Validation Kit ⁽²⁾	D835V2	4d060	Mar. 24, 2022	Mar. 22, 2024
SPEAG	835MHz System Validation Kit ⁽²⁾	D835V2	4d167	Nov. 24, 2022	Nov. 22, 2024
SPEAG	1750MHz System Validation Kit ⁽²⁾	D1750V2	1112	Jun. 22, 2022	Jun. 20, 2024
SPEAG	1900MHz System Validation Kit ⁽²⁾	D1900V2	5d185	Jun. 17, 2022	Jun. 15, 2024
SPEAG	2300MHz System Validation Kit ⁽²⁾	D2300V2	1006	Jan. 18, 2022	Jan. 16, 2024
SPEAG	2600MHz System Validation Kit ⁽²⁾	D2600V2	1078	Jun. 23, 2022	Jun. 21, 2024
SPEAG	3500MHz System Validation Kit ⁽²⁾	D3500V2	1036	Mar. 23, 2022	Mar. 21, 2024
SPEAG	3700MHz System Validation Kit ⁽²⁾	D3700V2	1006	Jun. 20, 2022	Jun. 18, 2024
SPEAG	3900MHz System Validation Kit	D3900V2	1092	May. 15, 2023	May. 14, 2024
SPEAG	Data Acquisition Electronics	DAE4	316	Jan. 23, 2023	Jan. 22, 2024
SPEAG	Data Acquisition Electronics	DAE4	376	Sep. 14, 2023	Sep. 13, 2024
SPEAG	Data Acquisition Electronics	DAE4	656	Jan. 23, 2023	Jan. 22, 2024
SPEAG	Data Acquisition Electronics	DAE4	1696	Oct. 23, 2023	Oct. 22, 2024
SPEAG	Data Acquisition Electronics	DAE4	1776	Mar. 03, 2023	Mar. 02, 2024
SPEAG	Dosimetric E-Field Probe	EX3DV4	3728	Mar. 22, 2023	Mar. 21, 2024
SPEAG	Dosimetric E-Field Probe	EX3DV4	3976	Feb. 21, 2023	Feb. 20, 2024
SPEAG	Dosimetric E-Field Probe	EX3DV4	7695	May. 22, 2023	May. 21, 2024
SPEAG	Dosimetric E-Field Probe	EX3DV4	7791	Feb. 22, 2023	Feb. 21, 2024
SPEAG	Dosimetric E-Field Probe	EX3DV4	7793	Mar. 08, 2023	Mar. 07, 2024
Anritsu	Radio Communication Analyzer	MT8821C	6201074414	Aug. 23, 2023	Aug. 22, 2024
Keysight	5G Wireless Test Platform	E7515B	MY59321826	Apr. 26, 2023	Apr. 25, 2024
SPEAG	Device Holder	N/A	N/A	N/A	N/A
Anritsu	Signal Generator	MG3710A	6201502524	Sep. 27, 2023	Sep. 26, 2024
Keysight	ENA Network Analyzer	E5071C	MY46104758	Oct. 30, 2023	Oct. 29, 2024
SPEAG	Dielectric Probe Kit	DAK-3.5	1126	Sep. 19, 2023	Sep. 18, 2024
LINE SEIKI	Digital Thermometer	DTM3000-spezial	3690	Aug. 09, 2023	Aug. 08, 2024
Anritsu	Power Meter	ML2495A	1419002	Aug. 17, 2023	Aug. 16, 2024
Anritsu	Power Sensor	MA2411B	1911176	Aug. 18, 2023	Aug. 17, 2024
Anritsu	Spectrum Analyzer	MS2830A	6201396378	Jul. 10, 2023	Jul. 09, 2024
Mini-Circuits	Power Amplifier	ZVE-8G+	6418	Oct. 16, 2023	Oct. 15, 2024
ATM	Dual Directional Coupler	C122H-10	P610410z-02	Note 1	
Warison	Directional Coupler	WCOU-10-50S-10	WR889BMC4B1	Note 1	
Woken	Attenuator 1	WK0602-XX	N/A	Note 1	
PE	Attenuator 2	PE7005-10	N/A	Note 1	
PE	Attenuator 3	PE7005-3	N/A	Note 1	

General Note:

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.
2. The dipole calibration interval can be extended to 3 years with justification according to KDB 865664 D01. The dipoles are also not physically damaged, or repaired during the interval. The justification data in appendix C can be found which the return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration for each dipole.

10. System Verification

10.1 Tissue Verification

The tissue dielectric parameters of tissue-equivalent media used for SAR measurements must be characterized within a temperature range of 18°C to 25°C, measured with calibrated instruments and apparatuses, such as network analyzers and temperature probes. The temperature of the tissue-equivalent medium during SAR measurement must also be within 18°C to 25°C and within ± 2°C of the temperature when the tissue parameters are characterized. The tissue dielectric measurement system must be calibrated before use. The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements.

The liquid tissue depth was at least 15cm in the phantom for all SAR testing

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ε _r)	Conductivity Target (σ)	Permittivity Target (ε _r)	Delta (σ) (%)	Delta (ε _r) (%)	Limit (%)	Date
750	22.6	0.884	41.800	0.89	41.90	-0.67	-0.24	±5	2023/11/26
750	22.5	0.893	43.000	0.89	41.90	0.34	2.63	±5	2023/11/29
750	22.4	0.896	43.100	0.89	41.90	0.67	2.86	±5	2023/12/6
750	22.2	0.884	42.700	0.89	41.90	-0.67	1.91	±5	2023/12/12
835	22.5	0.928	42.400	0.90	41.50	3.11	2.17	±5	2023/11/23
835	22.6	0.917	41.500	0.90	41.50	1.89	0.00	±5	2023/11/26
835	22.4	0.930	42.800	0.90	41.50	3.33	3.13	±5	2023/12/6
835	22.7	0.925	42.600	0.90	41.50	2.78	2.65	±5	2023/12/11
1750	22.6	1.360	40.800	1.37	40.10	-0.73	1.75	±5	2023/11/24
1750	22.5	1.350	40.400	1.37	40.10	-1.46	0.75	±5	2023/11/25
1750	22.4	1.370	40.200	1.37	40.10	0.00	0.25	±5	2023/12/2
1750	22.5	1.370	40.600	1.37	40.10	0.00	1.25	±5	2023/12/3
1750	22.2	1.360	40.600	1.37	40.10	-0.73	1.25	±5	2023/12/12
1900	22.6	1.420	41.000	1.40	40.00	1.43	2.50	±5	2023/11/24
1900	22.5	1.430	38.900	1.40	40.00	2.14	-2.75	±5	2023/11/25
1900	22.5	1.380	40.300	1.40	40.00	-1.43	0.75	±5	2023/11/28
1900	22.2	1.440	39.100	1.40	40.00	2.86	-2.25	±5	2023/12/12
2300	22.6	1.730	39.400	1.67	39.50	3.59	-0.25	±5	2023/11/27
2300	22.5	1.670	39.900	1.67	39.50	0.00	1.01	±5	2023/11/28
2300	22.4	1.640	39.800	1.67	39.50	-1.80	0.76	±5	2023/12/5
2300	22.6	1.710	38.700	1.67	39.50	2.40	-2.03	±5	2023/12/6
2300	22.5	1.630	39.600	1.67	39.50	-2.40	0.25	±5	2023/12/8
2300	22.4	1.650	39.200	1.67	39.50	-1.20	-0.76	±5	2023/12/11
2600	22.6	1.950	38.800	1.96	39.00	-0.51	-0.51	±5	2023/11/27
2600	22.3	2.000	39.300	1.96	39.00	2.04	0.77	±5	2023/12/3
2600	22.4	1.990	38.600	1.96	39.00	1.53	-1.03	±5	2023/12/5
2600	22.6	1.930	38.000	1.96	39.00	-1.53	-2.56	±5	2023/12/6
2600	22.5	1.960	38.600	1.96	39.00	0.00	-1.03	±5	2023/12/8
2600	22.4	1.990	38.000	1.96	39.00	1.53	-2.56	±5	2023/12/11
3500	22.5	2.980	37.900	2.91	37.90	2.41	0.00	±5	2023/12/4
3500	22.7	2.990	38.000	2.91	37.90	2.75	0.26	±5	2023/12/5
3500	22.4	3.010	37.800	2.91	37.90	3.44	-0.26	±5	2023/12/7
3500	22.5	2.930	37.500	2.91	37.90	0.69	-1.06	±5	2023/12/15
3700	22.5	3.170	37.700	3.12	37.70	1.60	0.00	±5	2023/12/4
3700	22.4	3.200	37.500	3.12	37.70	2.56	-0.53	±5	2023/12/7
3700	22.7	3.210	37.800	3.12	37.70	2.88	0.27	±5	2023/12/7
3700	22.5	3.120	37.200	3.12	37.70	0.00	-1.33	±5	2023/12/15
3900	22.5	3.380	37.400	3.33	37.51	1.50	-0.29	±5	2023/12/4
3900	22.7	3.420	37.600	3.33	37.51	2.70	0.24	±5	2023/12/9
3900	22.5	3.320	36.900	3.33	37.51	-0.30	-1.63	±5	2023/12/15



10.2 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Table with 11 columns: Test Site, Date, Frequency (MHz), Input Power (mW), Dipole S/N, Probe S/N, DAE S/N, Measured 1g SAR (W/kg), Targeted 1g SAR (W/kg), Normalized 1g SAR (W/kg), Deviation (%). Rows contain test data for various SAR sites and dates.

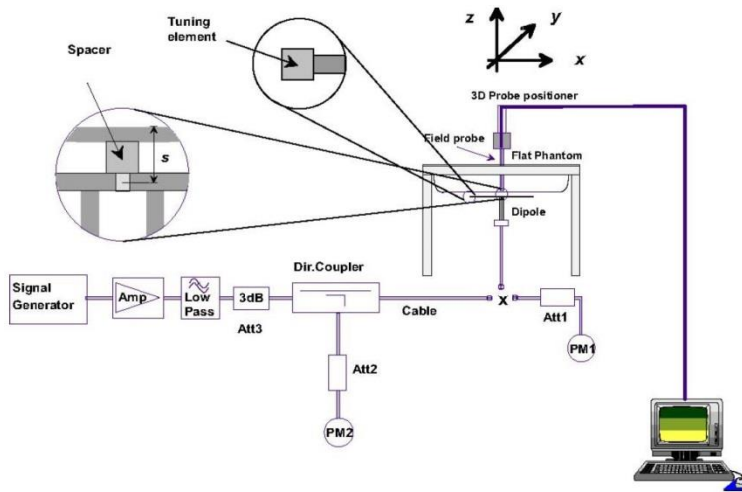


Fig 8.3.1 System Performance Check Setup



Fig 8.3.2 Setup Photo

11. RF Exposure Positions

11.1 SAR Testing for Tablet

This device can be used also in full sized tablet exposure conditions, due to its size. Per FCC KDB 616217, the back surface and edges of the tablet should be tested for SAR compliance with the tablet touching the phantom. The SAR exclusion threshold in KDB 447498 D01v06 can be applied to determine SAR test exclusion for adjacent edge configurations. The closest distance from the antenna to an adjacent tablet edge is used to determine if SAR testing is required for the adjacent edges, with the adjacent edge positioned against the phantom and the edge containing the antenna positioned perpendicular to the phantom.



12. Measurement procedure for output power and SAR

Detail output power measurement data is in the appendix D

<WCDMA Note>

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
3. For DC-HSDPA, the device was configured according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1, with the primary and the secondary serving HS-DSCH Cell enabled during the power measurement.
4. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
5. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSUPA, HSDPA, DC-HSDPA) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{HS} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15, \beta_{HS}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Setup Configuration

HSUPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCl
 - viii. Confirm that E-TFCl is equal to the target E-TFCl of 75 for sub-test 1, and other subtest's E-TFCl
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note1)	β_{ec}	β_{ed} (Note 4) (Note 5)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TFCl
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4 4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. For sub-test 5, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 5/15$ with $\beta_{hs} = 5/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

Setup Configuration

DC-HSDPA 3GPP release 8 Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration below
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set RMC 12.2Kbps + HSDPA mode.
 - ii. Set Cell Power = -25 dBm
 - iii. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
 - iv. Select HSDPA Uplink Parameters
 - v. Set Gain Factors (β_c and β_d) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - a). Subtest 1: $\beta_c/\beta_d=2/15$
 - b). Subtest 2: $\beta_c/\beta_d=12/15$
 - c). Subtest 3: $\beta_c/\beta_d=15/8$
 - d). Subtest 4: $\beta_c/\beta_d=15/4$
 - vi. Set Delta ACK, Delta NACK and Delta CQI = 8
 - vii. Set Ack-Nack Repetition Factor to 3
 - viii. Set CQI Feedback Cycle (k) to 4 ms
 - ix. Set CQI Repetition Factor to 2
 - x. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

C.8.1.12 Fixed Reference Channel Definition H-Set 12

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table. Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

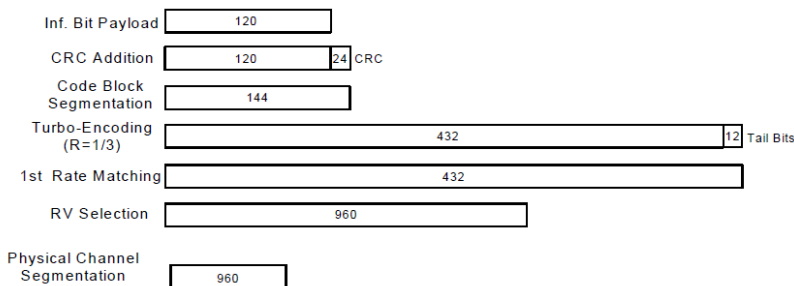


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

Setup Configuration

**<LTE Note>**

1. A Base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B4/B5/B12/B17/B26/B38/B71 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
9. LTE band 2/4/5/17/38 SAR test was covered by Band 25/66/26/12/41; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. the maximum output power, including tolerance, for the smaller band is \leq the larger band to qualify for the SAR test exclusion
 - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band

<TDD LTE SAR Measurement>

TDD LTE configuration setup for SAR measurement

SAR was tested with a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by 3GPP.

- a. 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations
- b. “special subframe S” contains both uplink and downlink transmissions, it has been taken into consideration to determine the transmission duty factor according to the worst case uplink and downlink cyclic prefix requirements for UpPTS
- c. Establishing connections with base station simulators ensure a consistent means for testing SAR and recommended for evaluating SAR. The Base station simulator was used for LTE output power measurements and SAR testing.

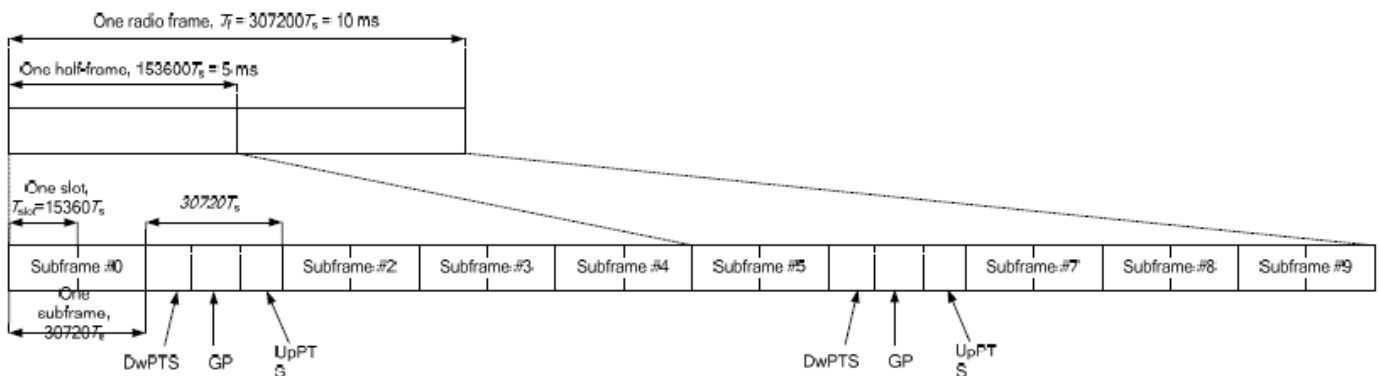


Figure 4.2-1: Frame structure type 2 (for 5 ms switch-point periodicity).

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	6592 · Ts	2192 · Ts	2560 · Ts	7680 · Ts	2192 · Ts	2560 · Ts
1	19760 · Ts			20480 · Ts		
2	21952 · Ts			23040 · Ts		
3	24144 · Ts			25600 · Ts		
4	26336 · Ts	4384 · Ts	5120 · Ts	7680 · Ts	4384 · Ts	5120 · Ts
5	6592 · Ts			20480 · Ts		
6	19760 · Ts			23040 · Ts		
7	21952 · Ts			12800 · Ts		
8	24144 · Ts	-	-	-	-	-
9	13168 · Ts	-	-	-	-	-

Special subframe (30720·T_s): Normal cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~4	7.13%	8.33%
	5~9	14.3%	16.7%

Special subframe(30720·T_s): Extended cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~3	7.13%	8.33%
	4~7	14.3%	16.7%

The highest duty factor is resulted from:

- i. Uplink-downlink configuration: 0. In a half-frame consisted of 5 subframes, uplink operation is in 3 uplink subframes and 1 special subframe.
- ii. special subframe configuration: 5-9 for normal cyclic prefix in downlink, 4-7 for extended cyclic prefix in downlink
- iii. for special subframe with extended cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(3+0.167)/5 = 63.3\%$
- iv. for special subframe with normal cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(3+0.143)/5 = 62.9\%$
- v. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The scaled TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.
- vi. The device supports Power Class 3 uplink-downlink configurations 0 and 6, and Power Class 2 uplink-downlink configurations 1 to 5 operations for LTE Band 41.
- vii. The highest available duty cycle for Power Class 2 operation is 43.3% using UL-DL configuration 1, for Power Class 3 operation is 63.3% using UL-DL configuration 0. Per FCC Guidance, all SAR tests were performed using Power Class 3. SAR with Power Class 2 at the available duty factor was additionally performed for the Power Class 3 configuration with the highest SAR among all exposure condition.

<5G NR Note>

1. Referencing the procedure in KDB 941225, the test procedures are outlined as below
 - a. For DFT-OFDM output power measurement, full measurement was done for Pi/2 BPSK and QPSK and for the largest supported bandwidth, repeat test for 16QAM/64QAM/256QAM under 1RB 1Offset configuration. For smaller bandwidth, measure conducted power for Pi/2 BPSK and 1RB 1Offset configuration.
 - b. According to the tune-up, CP-OFDM output power is not ½ dB higher than DFT-OFDM mode, and the reported SAR of DFT-OFDM mode reported SAR is ≤ 1.45 W/kg, SAR test and thus conducted power for CP-OFDM mode is not required.
 - c. To start SAR test for the largest channel bandwidth for Pi/2 BPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel. Also do SAR test for 50% RB allocation for Pi/2 BPSK SAR testing using 1RB Pi/2 BPSK allocation procedure
 - d. For Pi/2 BPSK with 100% RB allocation, SAR test is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
 - e. For higher modulation QPSK/16QAM/64QAM/256QAM, according to tune-up document the power level is not ½ dB higher than the same configuration in Pi/2 BPSK, also reported SAR for the Pi/2 BPSK configuration is less than 1.45 W/kg, QPSK/16QAM/64QAM/256QAM SAR testing are not required.
 - f. Smaller bandwidth output power for each RB allocation configuration for this device is not ½ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg, smaller bandwidth SAR testing is not required for this device
2. Due to test setup limitations, SAR testing for NR TDD Power class 3 was performed using Factory Test Mode software to establish the connection and perform SAR with 100% transmission. For NR TDD power class2 was performed using Factory Test Mode software to establish the connection and perform SAR with 50% transmission.
3. For NR FDD was establishing connections via a base station simulator to use for output power measurement and SAR testing.

<3GPP 38.101 MPR for EN-DC>

Table 6.2.2-1 Maximum power reduction (MPR) for power class 3

Modulation		MPR (dB)		
		Edge RB allocations	Outer RB allocations	Inner RB allocations
DFT-s-OFDM	Pi/2 BPSK	≤ 3.5 ¹	≤ 1.2 ¹	≤ 0.2 ¹
		≤ 0.5 ²	≤ 0.5 ²	0 ²
	QPSK		≤ 1	0
	16 QAM		≤ 2	≤ 1
	64 QAM		≤ 2.5	
	256 QAM		≤ 4.5	
CP-OFDM	QPSK		≤ 3	≤ 1.5
	16 QAM		≤ 3	≤ 2
	64 QAM		≤ 3.5	
	256 QAM		≤ 6.5	

NOTE 1: Applicable for UE operating in TDD mode with Pi/2 BPSK modulation and UE indicates support for UE capability *powerBoosting-pi2BPSK* and if the IE *powerBoostPi2BPSK* is set to 1 and 40 % or less slots in radio frame are used for UL transmission for bands n40, n41, n77, n78 and n79. The reference power of 0 dB MPR is 26 dBm.

NOTE 2: Applicable for UE operating in FDD mode, or in TDD mode in bands other than n40, n41, n77, n78 and n79 with Pi/2 BPSK modulation and if the IE *powerBoostPi2BPSK* is set to 0 and if more than 40 % of slots in radio frame are used for UL transmission for bands n40, n41, n77, n78 and n79.

Table 6.2.2-2 Maximum power reduction (MPR) for power class 2

Modulation		MPR (dB)		
		Edge RB allocations	Outer RB allocations	Inner RB allocations
DFT-s-OFDM	Pi/2 BPSK	≤ 3.5	≤ 0.5	0
	QPSK	≤ 3.5	≤ 1	0
	16 QAM	≤ 3.5	≤ 2	≤ 1
	64 QAM	≤ 3.5		≤ 2.5
	256 QAM		≤ 4.5	
CP-OFDM	QPSK	≤ 3.5	≤ 3	≤ 1.5
	16 QAM	≤ 3.5	≤ 3	≤ 2
	64 QAM		≤ 3.5	
	256 QAM		≤ 6.5	



13. DL/UL carrier aggregation

<LTE Carrier Aggregation combinations>

General Note:

1. This device supports Carrier Aggregation on downlink only for inter and intra band. For the device supports combination bands and configurations are according to 3GPP.
2. In applying the existing power measurement procedure of KDB 941225 D05A for DL CA SAR test exclusion, only the subset with the largest number of combinations of the frequency band and CCs in each row need consideration, and that configurations require power measurement should be highlighted in the below table.

2CC Downlink Carrier Aggregation			3CC Downlink Carrier Aggregation		
Number	Combination	Covered by	Number	Combination	Covered by
		Measurement Superset			Measurement Superset
1	CA_43C		61	CA_48D	417
2	CA_48B	417	62	CA_66D	417
3	CA_48C	417	63	CA_25A-25A-25A	418
4	CA_66B	417	64	CA_48A-48C	417
5	CA_2A-2A	409	65	CA_66A-66A-66A	417
6	CA_4A-4A	410	66	CA_66A-66B	417
7	CA_25A-25A	418	67	CA_66A-66C	417
8	CA_43A-43A		68	CA_2A-2A-4A	290
9	CA_48A-48A	417	69	CA_2A-2A-5A	398
10	CA_2A-4A	290	70	CA_2A-2A-7A	402
11	CA_2A-5A	398	71	CA_2A-2A-12A	389
12	CA_2A-12A	389	72	CA_2A-2A-13A	407
13	CA_2A-13A	407	73	CA_2A-2A-14A	392
14	CA_2A-14A	392	74	CA_2A-2A-29A	393
15	CA_2A-26A	180	75	CA_2A-2A-30A	394
16	CA_2A-29A	393	76	CA_2A-2A-46A	408
17	CA_2A-30A	394	77	CA_2A-2A-66A	409
18	CA_2A-46A	408	78	CA_2A-2A-71A	325
19	CA_2A-48A	409	79	CA_2A-4A-4A	290
20	CA_2A-66A	409	80	CA_2A-5B	398
21	CA_2A-71A	325	81	CA_2C-5A	398
22	CA_4A-12A	327	82	CA_2A-7A-7A	402
23	CA_4A-13A	158	83	CA_2A-7C	402
24	CA_4A-29A	328	84	CA_2A-12A-12A	389
25	CA_4A-30A	410	85	CA_2C-12A	389
26	CA_4A-46A	365	86	CA_2C-29A	393
27	CA_4A-48A	366	87	CA_2C-30A	394
28	CA_4A-71A	271	88	CA_2A-46A-46A	408
29	CA_5A-25A		89	CA_2A-46C	408
30	CA_5A-30A	412	90	CA_2A-48A-48A	409
31	CA_5A-38A		91	CA_2A-48C	409
32	CA_5A-41A		92	CA_2A-66A-66A	409
33	CA_5A-48A	336	93	CA_2A-66B	409
34	CA_7A-12A	340	94	CA_2A-66C	409
35	CA_7A-13A	388	95	CA_2C-66A	409
36	CA_7A-25A	415	96	CA_4A-4A-5A	410
37	CA_7A-26A	198	97	CA_4A-4A-7A	290
38	CA_7A-29A	344	98	CA_4A-4A-12A	327
39	CA_7A-66A	415	99	CA_4A-4A-13A	158
40	CA_12A-25A		100	CA_4A-4A-29A	328
41	CA_12A-30A	345	101	CA_4A-4A-30A	410
42	CA_12A-66A	389	102	CA_4A-4A-71A	271



43	CA_13A-48A	417	103	CA_4A-5B	410
44	CA_13A-66A	417	104	CA_4A-7A-7A	290
45	CA_14A-30A	351	105	CA_4A-12A-12A	327
46	CA_14A-66A	392	106	CA_4A-46A-46A	365
47	CA_25A-26A	418	107	CA_4A-46C	365
48	CA_25A-41A	418	108	CA_4A-48C	366
49	CA_25A-46A	256	109	CA_5A-5A-66A	413
50	CA_25A-66A	415	110	CA_5B-30A	412
51	CA_26A-41A	418	111	CA_5A-66A-66A	413
52	CA_29A-30A	354	112	CA_5A-66B	413
53	CA_29A-66A	393	113	CA_5A-66C	413
54	CA_30A-66A	412	114	CA_5B-66A	413
55	CA_41A-46A	374	115	CA_7A-7A-13A	388
56	CA_41A-48A		116	CA_7A-7A-25A	415
57	CA_46A-66A	416	117	CA_7A-7A-26A	198
58	CA_48A-66A	417	118	CA_7A-7A-29A	344
59	CA_48A-71A	154	119	CA_7A-7A-46A	411
60	CA_66A-71A	325	120	CA_7A-7A-66A	415
			121	CA_7C-13A	388
			122	CA_7A-25A-25A	415
			123	CA_7C-25A	415
			124	CA_7C-29A	344
			125	CA_7A-66A-66A	415
			126	CA_7C-66A	415
			127	CA_12A-66A-66A	389
			128	CA_12A-66C	389
			129	CA_13A-48A-48A	417
			130	CA_13A-48C	417
			131	CA_13A-66A-66A	417
			132	CA_13A-66B	417
			133	CA_13A-66C	417
			134	CA_14A-66A-66A	392
			135	CA_25A-25A-26A	418
			136	CA_25A-25A-41A	418
			137	CA_25A-25A-66A	415
			138	CA_25A-41C	418
			139	CA_25A-46C	256
			140	CA_26A-41C	418
			141	CA_29A-66A-66A	393
			142	CA_30A-66A-66A	412
			143	CA_41A-46C	374
			144	CA_46A-46A-66A	416
			145	CA_46A-66A-66A	416
			146	CA_46A-66C	416
			147	CA_46C-66A	416
			148	CA_48A-48A-66A	417
			149	CA_48A-48A-71A	154
			150	CA_48A-66A-66A	417
			151	CA_48A-66B	417
			152	CA_48A-66C	417
			153	CA_48C-66A	417
			154	CA_48C-71A	
			155	CA_66A-66A-71A	325
			156	CA_66C-71A	325
			157	CA_2A-4A-12A	287
			158	CA_2A-4A-13A	



			159	CA_2A-4A-29A	
			160	CA_2A-4A-30A	
			161	CA_2A-4A-71A	271
			162	CA_2A-5A-7A	292
			163	CA_2A-5A-30A	394
			164	CA_2A-5A-46A	395
			165	CA_2A-5A-48A	
			166	CA_2A-5A-66A	398
			167	CA_2A-7A-12A	274
			168	CA_2A-7A-13A	388
			169	CA_2A-7A-26A	
			170	CA_2A-7A-29A	305
			171	CA_2A-7A-46A	401
			172	CA_2A-7A-66A	402
			173	CA_2A-12A-30A	309
			174	CA_2A-12A-66A	389
			175	CA_2A-13A-46A	403
			176	CA_2A-13A-48A	404
			177	CA_2A-13A-66A	407
			178	CA_2A-14A-30A	280
			179	CA_2A-14A-66A	392
			180	CA_2A-26A-66A	
			181	CA_2A-29A-30A	318
			182	CA_2A-29A-66A	393
			183	CA_2A-30A-66A	320
			184	CA_2A-46A-66A	408
			185	CA_2A-48A-66A	409
			186	CA_2A-66A-71A	325
			187	CA_4A-5A-30A	410
			188	CA_4A-7A-12A	
			189	CA_4A-12A-30A	327
			190	CA_4A-29A-30A	328
			191	CA_5A-7A-46A	411
			192	CA_5A-30A-66A	412
			193	CA_5A-46A-66A	413
			194	CA_5A-48A-66A	336
			195	CA_7A-12A-66A	340
			196	CA_7A-13A-66A	341
			197	CA_7A-25A-66A	415
			198	CA_7A-26A-66A	
			199	CA_7A-29A-66A	344
			200	CA_7A-46A-66A	
			201	CA_12A-30A-66A	345
			202	CA_13A-46A-66A	416
			203	CA_13A-48A-66A	417
			204	CA_14A-30A-66A	351
			205	CA_25A-26A-41A	418
			206	CA_29A-30A-66A	354
			207	CA_29A-46A-66A	



4CC Downlink Carrier Aggregation			5CC Downlink Carrier Aggregation		
Number	Combination	Covered by	Number	Combination	Covered by
		Measurement Superset			Measurement Superset
208	CA_48E	417	355	CA_48A-48E	417
209	CA_48A-48D	417	356	CA_48C-48D	417
210	CA_48C-48C	417	357	CA_2A-2A-46D	408
211	CA_2A-2A-4A-4A	290	358	CA_2A-2A-66A-66B	409
212	CA_2A-2A-5B	398	359	CA_2A-2A-66A-66C	409
213	CA_2A-2A-7A-7A	402	360	CA_2A-46A-46D	408
214	CA_2A-2A-7C	402	361	CA_2A-46E	408
215	CA_2A-2A-12A-12A	389	362	CA_2A-48A-48D	409
216	CA_2A-2A-46C	408	363	CA_2A-48C-48C	409
217	CA_2A-2A-66A-66A	409	364	CA_2A-48E	409
218	CA_2A-2A-66B	409	365	CA_4A-46A-46D	
219	CA_2A-2A-66C	409	366	CA_4A-48E	
220	CA_2A-46A-46C	408	367	CA_5B-66A-66B	413
221	CA_2A-46D	408	368	CA_5B-66A-66C	413
222	CA_2A-48A-48C	409	369	CA_7A-7A-46D	411
223	CA_2A-48D	409	370	CA_13A-48A-48D	417
224	CA_2A-66A-66A-66A	409	371	CA_13A-48C-48C	417
225	CA_2A-66A-66B	409	372	CA_25A-25A-41D	418
226	CA_2A-66A-66C	409	373	CA_25A-41E	418
227	CA_2C-66A-66A	409	374	CA_41A-46E	
228	CA_2A-66D	409	375	CA_46A-46D-66A	416
229	CA_4A-4A-5B	410	376	CA_46D-66A-66A	416
230	CA_4A-4A-12A-12A	327	377	CA_46E-66A	416
231	CA_4A-46A-46C	365	378	CA_48A-48C-66B	417
232	CA_4A-46D	365	379	CA_48A-48C-66C	417
233	CA_4A-48D	366	380	CA_48A-48D-66A	417
234	CA_5A-5A-66A-66A	413	381	CA_48C-48C-66A	417
235	CA_5A-5A-66B	413	382	CA_48E-66A	417
236	CA_5A-5A-66C	413	383	CA_2A-2A-5A-66A-66A	398
237	CA_5A-48D	336	384	CA_2A-2A-5A-66B	398
238	CA_5A-66A-66B	413	385	CA_2A-2A-5A-66C	398
239	CA_5A-66A-66C	413	386	CA_2A-2A-5B-66A	398
240	CA_5B-66A-66A	413	387	CA_2A-2A-7A-7A-13A	388
241	CA_5A-66D	413	388	CA_2A-2A-7C-13A	
242	CA_5B-66B	413	389	CA_2A-2A-12A-66A-66A	
243	CA_5B-66C	413	390	CA_2A-2A-13A-66A-66A	407
244	CA_7A-7A-25A-25A	415	391	CA_2A-2A-13A-66B	407
245	CA_7A-7A-46C	411	392	CA_2A-2A-14A-66A-66A	
246	CA_7A-7A-66A-66A	415	393	CA_2A-2A-29A-66A-66A	
247	CA_7C-25A-25A	415	394	CA_2C-5B-30A	
248	CA_13A-48A-48C	417	395	CA_2A-5A-46D	
249	CA_13A-48D	417	396	CA_2A-5B-66A-66A	398
250	CA_13A-66A-66B	417	397	CA_2A-5B-66B	398
251	CA_13A-66A-66C	417	398	CA_2A-5B-66C	
252	CA_13A-66D	417	399	CA_2A-7A-7A-46C	401
253	CA_14A-66A-66A-66A	392	400	CA_2A-7A-7A-66A-66A	402
254	CA_25A-25A-41C	418	401	CA_2A-7A-46D	
255	CA_25A-41D	418	402	CA_2A-7C-66A-66A	
256	CA_25A-46D		403	CA_2A-13A-46D	
257	CA_41A-46D	374	404	CA_2A-13A-48D	
258	CA_46A-46C-66A	416	405	CA_2A-13A-66A-66B	407
259	CA_46C-66A-66A	416	406	CA_2A-13A-66A-66C	407



FCC SAR TEST REPORT

Report No. : FA3O1305

260	CA_46D-66A	416	407	CA_2A-13A-66D	
261	CA_48A-48A-66A-66A	417	408	CA_2A-46D-66A	
262	CA_48A-48A-66B	417	409	CA_2A-48D-66A	
263	CA_48A-48A-66C	417	410	CA_4A-4A-5B-30A	
264	CA_48A-48C-66A	417	411	CA_5A-7A-46D	
265	CA_48C-66A-66A	417	412	CA_5B-30A-66A-66A	
266	CA_48C-66B	417	413	CA_5A-46D-66A	
267	CA_48C-66C	417	414	CA_7A-7A-25A-25A-66A	415
268	CA_48D-66A	417	415	CA_7C-25A-25A-66A	
269	CA_2A-2A-4A-5A	288	416	CA_13A-46D-66A	
270	CA_2A-2A-4A-12A	287	417	CA_13A-48D-66A	
271	CA_2A-2A-4A-71A		418	CA_25A-25A-26A-41C	
272	CA_2A-2A-5A-30A	394			
273	CA_2A-2A-5A-66A	398			
274	CA_2A-2A-7A-12A				
275	CA_2A-2A-7A-13A	388			
276	CA_2A-2A-7A-66A	402			
277	CA_2A-2A-12A-30A	309			
278	CA_2A-2A-12A-66A	389			
279	CA_2A-2A-13A-66A	407			
280	CA_2A-2A-14A-30A				
281	CA_2A-2A-14A-66A	392			
282	CA_2A-2A-29A-30A	318			
283	CA_2A-2A-29A-66A	393			
284	CA_2A-2A-30A-66A	320			
285	CA_2A-2A-66A-71A	325			
286	CA_2A-4A-4A-5A	288			
287	CA_2A-4A-4A-12A				
288	CA_2A-4A-5B				
289	CA_2A-4A-7A-7A	290			
290	CA_2A-4A-7C				
291	CA_2A-5A-7A-7A	292			
292	CA_2A-5A-7C				
293	CA_2A-5B-30A	394			
294	CA_2C-5A-30A	394			
295	CA_2A-5A-46C	395			
296	CA_2A-5A-66A-66A	398			
297	CA_2A-5A-66B	398			
298	CA_2A-5A-66C	398			
299	CA_2A-5B-66A	398			
300	CA_2A-7A-7A-13A	388			
301	CA_2A-7A-7A-29A	305			
302	CA_2A-7A-7A-46A	401			
303	CA_2A-7A-7A-66A	402			
304	CA_2A-7C-13A	388			
305	CA_2A-7C-29A				
306	CA_2A-7A-46C	401			
307	CA_2A-7A-66A-66A	402			
308	CA_2A-7C-66A	402			
309	CA_2C-12A-30A				
310	CA_2A-12A-66A-66A	389			
311	CA_2A-12A-66C	389			
312	CA_2A-13A-46C	403			
313	CA_2A-13A-48C	404			
314	CA_2A-13A-66A-66A	407			
315	CA_2A-13A-66B	407			



FCC SAR TEST REPORT

Report No. : FA3O1305

316	CA_2A-13A-66C	407		
317	CA_2A-14A-66A-66A	392		
318	CA_2C-29A-30A			
319	CA_2A-29A-66A-66A	393		
320	CA_2A-30A-66A-66A			
321	CA_2A-46C-66A	408		
322	CA_2A-48A-66A-66A	409		
323	CA_2A-48C-66A	409		
324	CA_2A-66A-66A-71A	325		
325	CA_2A-66C-71A			
326	CA_4A-4A-5A-30A	410		
327	CA_4A-4A-12A-30A			
328	CA_4A-4A-29A-30A			
329	CA_4A-5B-30A	410		
330	CA_5A-7A-7A-66A	332		
331	CA_5A-7A-46C	411		
332	CA_5A-7A-66A-66A			
333	CA_5A-30A-66A-66A	412		
334	CA_5B-30A-66A	412		
335	CA_5A-46C-66A	413		
336	CA_5A-48A-66A-66A			
337	CA_7A-7A-13A-66A	341		
338	CA_7A-7A-25A-66A	415		
339	CA_7A-7A-29A-66A	344		
340	CA_7A-12A-66A-66A			
341	CA_7C-13A-66A			
342	CA_7A-25A-25A-66A	415		
343	CA_7C-25A-66A	415		
344	CA_7C-29A-66A			
345	CA_12A-30A-66A-66A			
346	CA_13A-46C-66A	416		
347	CA_13A-48A-66A-66A	417		
348	CA_13A-48A-66B	417		
349	CA_13A-48A-66C	417		
350	CA_13A-48C-66A	417		
351	CA_14A-30A-66A-66A			
352	CA_25A-25A-26A-41A	418		
353	CA_25A-26A-41C	418		
354	CA_29A-30A-66A-66A			

<Power verification when LTE Carrier Aggregation Active>

General Note:

- i. According to KDB941225 D05A v01r02, Uplink maximum output power measurement with downlink carrier aggregation active should be measured, using the highest output channel measured without downlink carrier aggregation, to confirm that uplink maximum output power with downlink carrier aggregation active remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output measured without downlink carrier aggregation active.
- ii. Uplink maximum output power with downlink carrier aggregation active does not show more than ¼ dB higher than the maximum output power without downlink carrier aggregation active, therefore SAR evaluation with downlink carrier aggregation active can be excluded.
- iii. The device supports downlink two carrier aggregation. For power measurement were control and acknowledge data is sent on uplink channels that operate identical to specifications when downlink carrier aggregation is inactive.
- iv. Selected highest measured power when downlink carrier aggregation is inactive for conducted power comparison with downlink carrier aggregation is active, to confirm that when downlink carrier aggregation is active uplink maximum output power remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output power measured when downlink carrier aggregation inactive.
- v. For non-contiguous intra-band CA, the SCC selected to provide maximum separation from the PCC and must remain fully within the downlink transmission band.
- vi. For Intra-band, contiguous CA, the downlink channels selected to perform the uplink power measurement must satisfy 3GPP channel spacing (5.4.1A of 3GPP TS 36.521 or equivalent) and channel bandwidth (5.4.2A) requirements.

$$\text{Nominal channel spacing} = \left\lceil \frac{BW_{\text{Channel}(1)} + BW_{\text{Channel}(2)} - 0.1|BW_{\text{Channel}(1)} - BW_{\text{Channel}(2)}|}{0.6} \right\rceil 0.3 \text{ [MHz]}$$

<Two Carrier power verification>

Configure		PCC						SCC				Power		
		LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	With CA Tx.Power (dBm)	W/O CA Tx.Power (dBm)
Inter-Band		5	10	844	20600	QPSK	1	0	25	20	1960	8340	23.81	23.83
		5	10	844	20600	QPSK	1	0	38	20	2595	38000	23.79	23.83
		5	10	844	20600	QPSK	1	0	41	20	2593	40620	23.79	23.83
		12	10	704	23060	QPSK	1	0	25	20	1960	8340	23.73	23.78
		41	20	2593	40620	QPSK	1	0	48	20	3641	56150	23.56	23.58
Intra-Band	Non-Contiguous	43	20	3700	44590	QPSK	1	0	43	20	3790	45990	20.18	20.23
	Contiguous	43	20	3700	44590	QPSK	1	0	43	20	3719.80	44788	20.16	20.23

<Three Carrier power verification>

Configure		PCC						SCC1				SCC2				Power		
		LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	With CA Tx.Power (dBm)	W/O CA Tx.Power (dBm)
Inter-Band		2	20	1860	18700	QPSK	1	0	4	20	2132.5	2175	13	10	751	5230	23.41	23.47
		2	20	1860	18700	QPSK	1	0	4	20	2132.5	2175	29	10	722.5	9715	23.42	23.47
		2	20	1860	18700	QPSK	1	0	4	20	2132.5	2175	30	10	2355	9820	23.44	23.47
		2	20	1860	18700	QPSK	1	0	5	10	881.5	2525	48	20	3641	56150	23.40	23.47
		2	20	1860	18700	QPSK	1	0	7	20	2655	3100	26	15	876.5	8865	23.38	23.47
		2	20	1860	18700	QPSK	1	0	26	15	876.5	8865	66	20	2155	66886	23.39	23.47
		4	20	1732.5	20175	QPSK	1	0	7	20	2655	3100	12	10	737.5	5095	23.44	23.44
		7	20	2535	21100	QPSK	1	0	26	15	876.5	8865	66	20	2155	66886	23.52	23.62
		7	20	2535	21100	QPSK	1	0	46	20	5537.5	50665	66	20	2155	66886	23.62	23.62
		48	20	3641	56150	QPSK	1	0	48	20	3660.8	56348	71	20	634.5	68761	20.34	20.39
		66	20	1745	132322	QPSK	1	0	29	10	722.5	9715	46	20	5537.5	50665	23.43	23.47



<Four Carrier power verification>

Configure	PCC							SCC1				SCC2				SCC3				Power	
	LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	With CA Tx.Power (dBm)	W/O CA Tx.Power (dBm)
Inter-Band	2	20	1860	18700	QPSK	1	0	2	5	1987.5	1175	14	10	763	5330	30	10	2355	9820	23.42	23.47
	2	20	1860	18700	QPSK	1	0	2	5	1987.5	1175	4	20	2132.5	2175	71	20	634.5	68761	23.38	23.47
	2	20	1860	18700	QPSK	1	0	2	5	1987.5	1175	7	20	2655	3100	12	10	737.5	5095	23.44	23.47
	2	20	1860	18700	QPSK	1	0	30	10	2355	9820	66	20	2155	66886	66	5	2197.5	67311	23.45	23.47
	2	20	1860	18700	QPSK	1	0	4	20	2132.5	2175	4	5	2152.5	2375	12	10	737.5	5095	23.43	23.47
	2	20	1860	18700	QPSK	1	0	4	20	2132.5	2175	5	10	881.5	2525	5	10	891.4	2624	23.37	23.47
	2	20	1860	18700	QPSK	1	0	4	20	2132.5	2175	7	20	2655	3100	7	20	2635.2	2902	23.43	23.47
	2	20	1860	18700	QPSK	1	0	5	10	881.5	2525	7	20	2655	3100	7	20	2635.2	2902	23.46	23.47
	2	20	1860	18700	QPSK	1	0	66	20	2155	66886	66	20	2135.2	66688	71	20	634.5	68761	23.42	23.47
	2	20	1860	18700	QPSK	1	0	7	20	2655	3100	7	20	2635.2	2902	29	10	722.5	9715	23.40	23.47
	2	20	1860	18700	QPSK	1	0	2	20	1959.8	898	12	10	737.5	5095	30	10	2355	9820	23.41	23.47
	2	20	1860	18700	QPSK	1	0	2	20	1959.8	898	29	10	722.5	9715	30	10	2355	9820	23.39	23.47
	4	20	1732.5	20175	QPSK	1	0	4	5	2153.5	2385	12	10	737.5	5095	30	10	2355	9820	23.39	23.44
	4	20	1732.5	20175	QPSK	1	0	4	5	2153.5	2385	29	10	722.5	9715	30	10	2355	9820	23.37	23.44
	5	10	844	20600	QPSK	1	0	48	20	3670.2	56442	66	20	2155	66886	66	5	2197.5	67311	23.82	23.83
	5	10	844	20600	QPSK	1	0	7	20	2655	3100	66	20	2155	66886	66	5	2197.5	67311	23.79	23.83
	7	20	2535	21100	QPSK	1	0	12	10	737.5	5095	66	20	2155	66886	66	5	2197.5	67311	23.58	23.62
	7	20	2535	21100	QPSK	1	0	7	20	2635.2	2902	13	10	751	5230	66	20	2155	66886	23.58	23.62
	7	20	2535	21100	QPSK	1	0	7	20	2635.2	2902	29	10	722.5	9715	66	20	2155	66886	23.59	23.62
	12	10	704	23060	QPSK	1	0	30	10	2355	9820	66	20	2155	66886	66	5	2197.5	67311	23.76	23.78
14	10	793	23330	QPSK	1	0	30	10	2355	9820	66	20	2155	66886	66	5	2197.5	67311	23.80	23.85	
25	20	1880	26340	QPSK	1	0	46	20	5537.5	50665	46	20	5557.3	50863	46	20	5577.1	51061	23.42	23.49	
30	10	2310	27710	QPSK	1	0	29	10	722.5	9715	66	20	2155	66886	66	5	2197.5	67311	21.61	21.67	

<Five Carrier power verification>

Configure	PCC							SCC1				SCC2				SCC3				SCC4		Power			
	LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	With CA Tx.Power (dBm)	W/O CA Tx.Power (dBm)
Inter-Band	2	20	1860	18700	QPSK	1	0	13	10	751	5230	46	20	5537.5	50665	46	20	5557.3	50863	46	20	5577.1	51061	23.39	23.47
	2	20	1860	18700	QPSK	1	0	13	10	751	5230	48	20	3641	56150	48	20	3621.2	55952	48	20	3601.4	55754	23.44	23.47
	2	20	1860	18700	QPSK	1	0	13	10	751	5230	66	20	2155	66886	66	20	2135.2	66688	66	20	2115.4	66490	23.42	23.47
	2	20	1860	18700	QPSK	1	0	2	5	1987.5	1175	12	10	737.5	5095	66	20	2155	66886	66	5	2197.5	67311	23.39	23.47
	2	20	1860	18700	QPSK	1	0	2	5	1987.5	1175	4	5	2152.5	2375	66	20	2155	66886	66	5	2197.5	67311	23.44	23.47
	2	20	1860	18700	QPSK	1	0	2	5	1987.5	1175	5	10	881.5	2525	66	20	2155	66886	66	5	2197.5	67311	23.42	23.47
	2	20	1860	18700	QPSK	1	0	2	5	1987.5	1175	7	20	2655	3100	7	20	2635.2	2902	13	10	751	5230	23.45	23.47
	2	20	1860	18700	QPSK	1	0	46	20	5537.5	50665	46	20	5557.3	50863	46	20	5577.1	51061	66	20	2155	66886	23.47	23.47
	2	20	1860	18700	QPSK	1	0	48	20	3641	56150	48	20	3621.2	55952	48	20	3601.4	55754	66	20	2155	66886	23.37	23.47
	2	20	1860	18700	QPSK	1	0	5	10	881.5	2525	46	20	5537.5	50665	46	20	5557.3	50863	46	20	5577.1	51061	23.46	23.47
	2	20	1860	18700	QPSK	1	0	5	10	881.5	2525	5	10	891.4	2624	66	20	2155	66886	66	20	2135.2	66688	23.37	23.47
	2	20	1860	18700	QPSK	1	0	7	20	2655	3100	46	20	5537.5	50665	46	20	5557.3	50863	46	20	5577.1	51061	23.47	23.47
	2	20	1860	18700	QPSK	1	0	7	20	2655	3100	7	20	2635.2	2902	66	20	2155	66886	66	5	2197.5	67311	23.45	23.47
	2	20	1860	18700	QPSK	1	0	2	20	1959.8	898	5	10	881.5	2525	5	10	891.4	2624	30	10	2355	9820	23.45	23.47
	4	20	1732.5	20175	QPSK	1	0	46	20	5537.5	50665	46	20	5537.5	50665	46	20	5557.3	50863	46	20	5577.1	51061	23.40	23.44
	4	20	1732.5	20175	QPSK	1	0	48	20	3641	56150	48	20	3621.2	55952	48	20	3601.4	55754	48	20	3581.6	55556	23.40	23.44
	4	20	1732.5	20175	QPSK	1	0	4	5	2153.5	2385	5	10	881.5	2525	5	10	891.4	2624	30	10	2355	9820	23.44	23.44
	5	10	844	20600	QPSK	1	0	46	20	5537.5	50665	46	20	5557.3	50863	46	20	5577.1	51061	66	20	2155	66886	23.77	23.83
	5	10	844	20600	QPSK	1	0	7	20	2655	3100	46	20	5537.5	50665	46	20	5557.3	50863	46	20	5577.1	51061	23.77	23.83
	5	10	844	20600	QPSK	1	0	5	10	879.1	2501	30	10	2355	9820	66	20	2155	66886	66	5	2197.5	67311	23.83	23.83
7	20	2535	21100	QPSK	1	0	7	20	2635.2	2902	25	20	1960	8340	25	5	1932.5	8065	66	20	2155	66886	23.58	23.62	
13	10	782	23230	QPSK	1	0	46	20	5537.5	50665	46	20	5557.3	50863	46	20	5577.1	51061	66	20	2155	66886	23.55	23.61	
13	10	782	23230	QPSK	1	0	48	20	3641	56150	48	20	3621.2	55952	48	20	3601.4	55754	66	20	2155	66886	23.56	23.61	
25	20	1880	26340	QPSK	1	0	25	5	1992.5	8665	26	15	876.5	8865	41	20	2593	40620	41	20	2612.8	40818	23.41	23.49	
41	20	2593	40620	QPSK	1	0	46	20	5537.5	50665	46	20	5557.3	50863	46	20	5577.1	51061	46	20	5596.9	51259	23.50	23.58	

<LTE Uplink carrier aggregation>

2CC Uplink Carrier Aggregation	
Number	Combination
1	2C
2	5B
3	7C
4	66B
5	66C
6	38C
7	41C
8	42C
9	43C
10	48C

<Intra-band>

General Note:

- i. The device supports intra-band uplink carrier aggregation with a maximum of two 20MHz component carriers. For intra band contiguous carrier aggregation scenarios, 3GPP 36.101 table 6.2.2A-1 specifies that the aggregate maximum allowed output power is equivalent to the single carrier scenario. 3GPP 36.101 6.2.3A allows for several dB of MPR to be applied when not-contiguous RB allocation is implemented. The conducted power and MPR setting in this device are permanently implemented pre 3GPP requirement.
- ii. The device supports uplink carrier aggregation with a maximum of two 20MHz component carriers. For intra band contiguous carrier aggregation scenarios, 3GPP 36.101 table 6.2.2A-1 specifies that the aggregate maximum allowed output power is equivalent to the single carrier scenario. 3GPP 36.101 6.2.3A allows for several dB of MPR to be applied when not-contiguous RB allocation is implemented. The conducted power and MPR setting in this device are permanently implemented pre the 3GPP requirement.
- iii. According TCB workshop, the output power with uplink CA active was measured for the configuration with the highest reported SAR with single carrier for each exposure condition. The power was measured with wideband signal integration over both component carriers.
- iv. Additional SAR measurement for LTE UL CA whit other DL CA combinations active were not required since the maximum output power for this configuration was not > 0.25dB higher than the maximum output power for UL CA active.

Sensor OFF

CA_2C_Main										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset				
18700	18898	QPSK	1	0	0	0	1	0	23.42	25
18900	18702	QPSK	1	0	0	0	1	0	23.16	25
19100	18902	QPSK	1	0	0	0	1	0	23.36	25

CA_5B_Main										
Combination 10MHz+10MHz (50RB+50RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset				
20450	20549	QPSK	1	0	0	0	1	0	23.61	25
20475	20574	QPSK	1	49	1	0	2	0	23.63	25
20600	20501	QPSK	1	0	1	49	2	0	23.7	25



CA_7C_Main										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset				
20850	21048	QPSK	1	0	0	0	1	0	23.17	25
21100	20902	QPSK	1	0	1	99	2	0	23.58	25
21350	21152	QPSK	1	0	1	99	2	0	23.41	25

CA_66B_Main										
Combination 15MHz+5MHz (75RB+25RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset				
132047	132140	QPSK	1	0	0	0	1	0	23.27	25
132229	132322	QPSK	1	0	0	0	2	0	23.43	25
132504	132597	QPSK	1	0	0	0	2	0	23.33	25

CA_66C_Main										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset				
132072	132270	QPSK	1	0	0	0	1	0	23.18	25
132322	132124	QPSK	1	0	1	99	2	0	23.45	25
132572	132374	QPSK	1	0	1	99	2	0	23.25	25

CA_38C_Main										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset				
37850	38048	QPSK	1	0	0	0	1	0	23.41	25
37802	38000	QPSK	1	0	0	0	1	0	23.39	25
38150	37952	QPSK	1	0	0	0	1	0	23.2	25

CA_41C_Main										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset				
39750	39948	QPSK	1	0	0	0	1	0	23.26	25
39790	39988	QPSK	1	0	0	0	1	0	23.24	25
40185	39987	QPSK	1	0	1	99	2	0	23.33	25
40620	40422	QPSK	1	0	1	99	2	0	23.54	25
41055	40857	QPSK	1	0	1	99	2	0	23.25	25
41490	41292	QPSK	1	0	1	99	2	0	23.24	25

CA_41C_HPUE_Main										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset				
39750	39948	QPSK	1	0	0	0	1	0	24.98	27
39790	39988	QPSK	1	0	0	0	1	0	25.02	27
40185	39987	QPSK	1	0	1	99	2	0	25.21	27
40620	40422	QPSK	1	0	1	99	2	0	25.48	27
41055	40857	QPSK	1	0	1	99	2	0	25.19	27
41490	41292	QPSK	1	0	1	99	2	0	25.35	27



CA_42C_MIMO2										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset				
42190	42388	QPSK	1	0	0	0	1	0	20.3	22
42392	42590	QPSK	1	0	0	0	2	0	20.09	22
42792	42990	QPSK	1	0	0	0	2	0	20.06	22

CA_43C_MIMO2										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset				
44690	44888	QPSK	1	0	0	0	1	0	20.19	22
45090	44892	QPSK	1	0	1	99	2	0	20.21	22
45490	45292	QPSK	1	0	1	99	2	0	20.03	22

CA_48C_MIMO2										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset				
55340	55538	QPSK	1	0	0	0	1	0	20.13	22
55632	55830	QPSK	1	0	0	0	2	0	20.27	22
55952	56150	QPSK	1	0	0	0	2	0	20.46	22
56442	56640	QPSK	1	0	0	0	2	0	20.41	22

Sensor ON

CA_2C_Main										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset				
18700	18898	QPSK	1	0	0	0	1	0	13.48	14.5
18900	18702	QPSK	1	0	0	0	1	0	13.56	14.5
19100	18902	QPSK	1	0	0	0	1	0	13.53	14.5

CA_5B_Main										
Combination 10MHz+10MHz (50RB+50RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset				
20450	20549	QPSK	1	0	0	0	1	0	16.81	18
20475	20574	QPSK	1	49	1	0	2	0	16.91	18
20600	20501	QPSK	1	0	1	49	2	0	16.83	18

CA_7C_Main										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset				
20850	21048	QPSK	1	0	0	0	1	0	11.21	12.5
21100	20902	QPSK	1	0	1	99	2	0	12.37	12.5
21350	21152	QPSK	1	0	1	99	2	0	12.32	12.5

CA_66B_Main										
Combination 15MHz+5MHz (75RB+25RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset				
132047	132140	QPSK	1	0	0	0	1	0	14.04	15
132229	132322	QPSK	1	0	0	0	1	0	14.14	15
132504	132597	QPSK	1	0	0	0	1	0	13.99	15

CA_66C_Main										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset				
132072	132270	QPSK	1	0	0	0	1	0	14.18	15
132322	132124	QPSK	1	0	1	99	2	0	14.71	15
132572	132374	QPSK	1	0	1	99	2	0	14.62	15

CA_38C_Main										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset				
37850	38048	QPSK	1	0	0	0	1	0	13.06	14
37802	38000	QPSK	1	0	0	0	1	0	13.12	14
38150	37952	QPSK	1	0	0	0	1	0	13.11	14



CA_41C_Main										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset				
39750	39948	QPSK	1	0	0	0	1	0	13.18	14
39790	39988	QPSK	1	0	0	0	1	0	13.24	14
40185	39987	QPSK	1	0	0	0	1	0	13.39	14
40620	40422	QPSK	1	0	0	0	1	0	13.42	14
41055	40857	QPSK	1	0	0	0	1	0	13.45	14
41490	41292	QPSK	1	0	0	0	1	0	13.59	14

CA_41C_HPUE_Main										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset				
39750	39948	QPSK	1	0	0	0	1	0	14.26	16
39790	39988	QPSK	1	0	0	0	1	0	14.25	16
40185	39987	QPSK	1	0	1	99	2	0	14.47	16
40620	40422	QPSK	1	0	1	99	2	0	14.59	16
41055	40857	QPSK	1	0	1	99	2	0	14.58	16
41490	41292	QPSK	1	0	1	99	2	0	14.55	16

CA_42C_MIMO2										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset				
42190	42388	QPSK	1	0	0	0	1	0	10.05	11
42392	42590	QPSK	1	0	0	0	1	0	10.16	11
42792	42990	QPSK	1	0	0	0	1	0	9.92	11

CA_43C_MIMO2										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset				
44690	44888	QPSK	1	0	0	0	1	0	9.57	11
45090	44892	QPSK	1	0	1	99	2	0	10.18	11
45490	45292	QPSK	1	0	1	99	2	0	10.03	11

CA_48C_MIMO2										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset				
55340	55538	QPSK	1	0	0	0	1	0	10.34	11.5
55632	55830	QPSK	1	0	0	0	1	0	10.33	11.5
55952	56150	QPSK	1	0	0	0	1	0	10.28	11.5
56442	56640	QPSK	1	0	0	0	1	0	10.29	11.5



<SAR test exclusion table>

General Note:

1. The below table, when the distance is < 50 mm exclusion threshold is "Ratio", when the distance is > 50 mm exclusion threshold is "mW"
2. Maximum power is the source-based time-average power and represents the maximum RF output power among production units
3. Per KDB 447498 D01v06, for larger devices, the test separation distance of adjacent edge configuration is determined by the closest separation between the antenna and the user.
4. Per KDB 447498 D01v06, standalone SAR test exclusion threshold is applied; If the test separation distance is < 5mm, 5mm is used to determine SAR exclusion threshold.
5. Per KDB 447498 D01v06, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:
 - $[(max. \text{ power of channel, including tune-up tolerance, mW}) / (min. \text{ test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR
 - f(GHz) is the RF channel transmit frequency in GHz
 - Power and distance are rounded to the nearest mW and mm before calculation
 - The result is rounded to one decimal place for comparison
6. Per KDB 447498 D01v06, at 100 MHz to 6 GHz and for *test separation distances* > 50 mm, the SAR test exclusion threshold is determined according to the following
 - a) [Threshold at 50 mm in step 1) + (test separation distance - 50 mm) · (f(MHz)/150)] mW, at 100 MHz to 1500 MHz
 - b) [Threshold at 50 mm in step 1) + (test separation distance - 50 mm) · 10] mW at > 1500 MHz and ≤ 6 GHz

<Main Ant>

Exposure Position	Wireless Interface	WCDMA Band V	WCDMA Band IV	WCDMA Band II	LTE Band 71/n71	LTE Band 12/17/n12/n17	LTE Band 13/n13	LTE Band 14/n14	LTE Band 26/n26	LTE Band 4/66/n66	LTE Band 2/25/n2/n25	LTE Band 30/n30	LTE Band 7/n7	LTE Band 38/41/n38/n41	LTE Band 42	LTE Band 48/n48	LTE Band n77	LTE Band n78
	Calculated Frequency (MHz)	846	1750	1907	695	715	784	795	848	1779	1914	2312	2567	2690	3600	3700	3980	3800
Maximum power (dBm)	Maximum power (dBm)	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	23.0	25.0	27.5	22.0	22.0	27.5	27.5
	Maximum rated power(mW)	316.23	316.23	316.23	316.23	316.23	316.23	316.23	316.23	316.23	316.23	199.53	316.23	562.34	158.49	158.49	562.34	562.34
Bottom Face	Separation distance(mm)	5.0																
	exclusion threshold	58.2	83.7	87.3	52.7	53.5	56.0	56.4	58.2	84.4	87.5	60.7	101.3	184.5	60.1	61.0	224.4	219.2
	Testing required?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Edge 1	Separation distance(mm)	5.0																
	exclusion threshold	58.2	83.7	87.3	52.7	53.5	56.0	56.4	58.2	84.4	87.5	60.7	101.3	184.5	60.1	61.0	224.4	219.2
	Testing required?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Edge 2	Separation distance(mm)	5.0																
	exclusion threshold	58.2	83.7	87.3	52.7	53.5	56.0	56.4	58.2	84.4	87.5	60.7	101.3	184.5	60.1	61.0	224.4	219.2
	Testing required?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Edge 3	Separation distance(mm)	206.9																
	exclusion threshold	1048.0	1682.0	1678.0	907.0	925.0	989.0	1000.0	1050.0	1681.0	1677.0	1668.0	1663.0	1660.0	1648.0	1647.0	1644.0	1646.0
	Testing required?	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
Edge 4	Separation distance(mm)	227.0																
	exclusion threshold	1161.0	1883.0	1879.0	1000.0	1021.0	1095.0	1106.0	1164.0	1882.0	1878.0	1869.0	1864.0	1861.0	1849.0	1848.0	1845.0	1847.0
	Testing required?	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
Bottom of Laptop	Separation distance(mm)	7.3																
	exclusion threshold	39.8	57.3	59.8	36.1	36.6	38.4	38.6	39.9	57.8	59.9	41.6	69.4	126.3	41.2	41.8	153.7	150.2
	Testing required?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes

<Aux Ant>

Exposure Position	Wireless Interface	LTE Band n38/n41	LTE Band n48	LTE Band n77	LTE Band n78
	Calculated Frequency (MHz)	2690	3700	3980	3800
	Maximum power (dBm)	27.5	22.0	27.5	27.5
	Maximum rated power(mW)	562.34	158.49	562.34	562.34
Bottom Face	Separation distance(mm)	5.0			
	exclusion threshold	184.5	61.0	224.4	219.2
	Testing required?	Yes	Yes	Yes	Yes
Edge 1	Separation distance(mm)	5.0			
	exclusion threshold	184.5	61.0	224.4	219.2
	Testing required?	Yes	Yes	Yes	Yes
Edge 2	Separation distance(mm)	267.5			
	exclusion threshold	2266.0	2253.0	2250.0	2252.0
	Testing required?	No	No	No	No
Edge 3	Separation distance(mm)	206.9			
	exclusion threshold	1660.0	1647.0	1644.0	1646.0
	Testing required?	No	No	No	No
Edge 4	Separation distance(mm)	5.0			
	exclusion threshold	184.5	61.0	224.4	219.2
	Testing required?	Yes	Yes	Yes	Yes
Bottom of Laptop	Separation distance(mm)	7.3			
	exclusion threshold	126.3	41.8	153.7	150.2
	Testing required?	Yes	Yes	Yes	Yes

<MIMO 1 Ant>

Exposure Position	Wireless Interface	LTE Band n38/n41	LTE Band n48	LTE Band n77	LTE Band n78
	Calculated Frequency (MHz)	2690	3700	3980	3800
	Maximum power (dBm)	12.0	8.5	11.0	8.0
	Maximum rated power(mW)	15.85	7.08	12.59	6.31
Bottom Face	Separation distance(mm)	5.0			
	exclusion threshold	5.2	2.7	5.0	2.5
	Testing required?	Yes	No	Yes	No
Edge 1	Separation distance(mm)	29.0			
	exclusion threshold	0.9	0.5	0.9	0.4
	Testing required?	No	No	No	No
Edge 2	Separation distance(mm)	5.0			
	exclusion threshold	5.2	2.7	5.0	2.5
	Testing required?	Yes	No	Yes	No
Edge 3	Separation distance(mm)	151.0			
	exclusion threshold	1101.0	1088.0	1085.0	1087.0
	Testing required?	No	No	No	No
Edge 4	Separation distance(mm)	300.0			
	exclusion threshold	2591.0	2578.0	2575.0	2577.0
	Testing required?	No	No	No	No
Bottom of Laptop	Separation distance(mm)	6.5			
	exclusion threshold	4.0	2.1	3.9	1.9
	Testing required?	Yes	No	Yes	No



<MIMO 2 Ant>

Exposure Position	Wireless Interface	LTE Band 4/66/n4/n66	LTE Band 2/25/n2/n25	LTE Band 30/n30	LTE Band 7/n7	LTE Band 38/41/n38/n41	LTE Band 42	LTE Band 43	LTE Band 48/n48	LTE Band n77	LTE Band n78
	Calculated Frequency (MHz)	1779	1914	2312	2567	2690	3600	3800	3700	3980	3800
	Maximum power (dBm)	24.0	24.0	23.0	24.0	27.5	22.0	22.0	22.0	27.5	27.5
	Maximum rated power(mW)	251.19	251.19	199.53	251.19	562.34	158.49	158.49	158.49	562.34	562.34
Bottom Face	Separation distance(mm)	5.0									
	exclusion threshold	67.0	69.5	60.7	80.5	184.5	60.1	61.8	61.0	224.4	219.2
	Testing required?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Edge 1	Separation distance(mm)	29.0									
	exclusion threshold	11.6	12.0	10.5	13.9	31.8	10.4	10.7	10.5	38.7	37.8
	Testing required?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Edge 2	Separation distance(mm)	300.0									
	exclusion threshold	2612.0	2608.0	2599.0	2594.0	2591.0	2579.0	2577.0	2578.0	2575.0	2577.0
	Testing required?	No	No	No	No	No	No	No	No	No	No
Edge 3	Separation distance(mm)	151.0									
	exclusion threshold	1122.0	1118.0	1109.0	1104.0	1101.0	1089.0	1087.0	1088.0	1085.0	1087.0
	Testing required?	No	No	No	No	No	No	No	No	No	No
Edge 4	Separation distance(mm)	5.0									
	exclusion threshold	67.0	69.5	60.7	80.5	184.5	60.1	61.8	61.0	224.4	219.2
	Testing required?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Bottom of Laptop	Separation distance(mm)	6.5									
	exclusion threshold	51.5	53.5	46.7	61.9	141.9	46.3	47.5	46.9	172.6	168.7
	Testing required?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes



14. SAR Test Results

General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
 - c. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The Reported TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
4. For the exposure positions that proximity sensor power reduction is applied for SAR compliance, additional SAR testing with EUT transmitting full power in sensor trigger distance was performed according to section 4. The test results just verification the sensor trigger distance to meet KDB 616217 requirement, when in normal usage will not operate at trigger distance, therefore, these results were not using performed Sim-Tx analysis.

UMTS Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq 1/4$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSUPA, HSDPA, DC-HSDPA) are less than $1/4$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

LTE Note:

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $>$ not $1/2$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is $>$ not $1/2$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. For LTE B4/B5/B12/B17/B26/B38/B71 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
7. LTE band 2/4/5/17/38 SAR test was covered by Band 25/66/26/12/41; according to TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. The maximum output power, including tolerance, for the smaller band is \leq the larger band to qualify for the SAR test exclusion.
 - b. The channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band.

5G NR Note:

1. Referencing the procedure in KDB 941225, the test procedures are outlined as below:
 - a. To start SAR test for the largest channel bandwidth for PI/2 BPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel. Also do SAR test for 50% RB allocation for PI/2 BPSK SAR testing using 1RB PI/2 BPSK allocation procedure
 - b. For PI/2 BPSK with 100% RB allocation, SAR test is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
 - c. For higher modulation QPSK/16QAM/64QAM/256QAM, according to tune-up document the power level is not $\frac{1}{2}$ dB higher than the same configuration in PI/2 BPSK, also reported SAR for the PI/2 BPSK configuration is less than 1.45 W/kg, QPSK/16QAM/64QAM/256QAM SAR testing are not required.
 - d. Smaller bandwidth output power for each RB allocation configuration for this device is not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg, smaller bandwidth SAR testing is not required for this device
 - e. For 5G FR1 n5/n12/n41/n71/n77, the maximum channel bandwidth does not support three non-overlapping channels in the frequency band, the middle channel of the group of overlapping channels were selected for testing.
 - f. Due to test setup limitations, SAR testing for NR was performed using Factory Test Mode software to establish the connection and perform SAR with 100% transmission. And only for TDD power class2 was performed using Factory Test Mode software to establish the connection and perform SAR with 50% transmission.
 - g. For NR FDD was establishing connections via a base station simulator to use for output power measurement and SAR testing
 - h. 5G FR1 n2/5/38/78 SAR test was covered by 5G FR1 n25/26/41/77; due to the maximum output power, including tolerance, for the smaller band is \leq the larger band, and the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band.



14.1 Body SAR

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Antenna Vendor	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA II_Ant Main	RMC 12.2Kbps	Bottom of Laptop	0mm	ON	9400	1880	SPEED	13.94	14.50	1.138	-0.15	0.262	0.298
	WCDMA II_Ant Main	RMC 12.2Kbps	Bottom Face	0mm	ON	9400	1880	SPEED	13.94	14.50	1.138	-0.08	0.865	0.984
01	WCDMA II_Ant Main	RMC 12.2Kbps	Bottom Face	0mm	ON	9262	1852.4	SPEED	13.83	14.50	1.167	0.01	0.897	1.047
	WCDMA II_Ant Main	RMC 12.2Kbps	Bottom Face	0mm	ON	9538	1907.6	SPEED	13.86	14.50	1.159	-0.04	0.878	1.017
	WCDMA II_Ant Main	RMC 12.2Kbps	Edge 1	0mm	ON	9400	1880	SPEED	13.94	14.50	1.138	-0.17	0.240	0.273
	WCDMA II_Ant Main	RMC 12.2Kbps	Edge 2	0mm	ON	9400	1880	SPEED	13.94	14.50	1.138	-0.08	0.247	0.281
	WCDMA II_Ant Main	RMC 12.2Kbps	Bottom Face	0mm	ON	9262	1852.4	SAA	13.83	14.50	1.167	-0.08	0.765	0.893
	WCDMA II_Ant Main	RMC 12.2Kbps	Bottom Face	0mm	ON	9400	1880	SAA	13.94	14.50	1.138	-0.18	0.762	0.867
	WCDMA II_Ant Main	RMC 12.2Kbps	Bottom Face	0mm	ON	9538	1907.6	SAA	13.86	14.50	1.159	0.1	0.749	0.868
	WCDMA II_Ant Main	RMC 12.2Kbps	Bottom of Laptop	25mm	OFF	9400	1880	SPEED	23.83	25.00	1.309	-0.05	0.229	0.300
	WCDMA II_Ant Main	RMC 12.2Kbps	Bottom Face	25mm	OFF	9400	1880	SPEED	23.83	25.00	1.309	0.14	0.322	0.422
	WCDMA II_Ant Main	RMC 12.2Kbps	Edge 1	24mm	OFF	9400	1880	SPEED	23.83	25.00	1.309	-0.17	0.209	0.274
	WCDMA II_Ant Main	RMC 12.2Kbps	Edge 2	12mm	OFF	9400	1880	SPEED	23.83	25.00	1.309	0.17	0.101	0.132
	WCDMA IV_Ant Main	RMC 12.2Kbps	Bottom of Laptop	0mm	ON	1413	1732.6	SPEED	14.60	15.00	1.096	0.08	0.343	0.376
	WCDMA IV_Ant Main	RMC 12.2Kbps	Bottom Face	0mm	ON	1413	1732.6	SPEED	14.60	15.00	1.096	0.03	0.954	1.046
02	WCDMA IV_Ant Main	RMC 12.2Kbps	Bottom Face	0mm	ON	1312	1712.4	SPEED	14.47	15.00	1.130	-0.02	0.964	1.089
	WCDMA IV_Ant Main	RMC 12.2Kbps	Bottom Face	0mm	ON	1513	1752.6	SPEED	14.58	15.00	1.102	-0.08	0.944	1.040
	WCDMA IV_Ant Main	RMC 12.2Kbps	Edge 1	0mm	ON	1413	1732.6	SPEED	14.60	15.00	1.096	-0.08	0.357	0.391
	WCDMA IV_Ant Main	RMC 12.2Kbps	Edge 2	0mm	ON	1413	1732.6	SPEED	14.60	15.00	1.096	0.1	0.392	0.430
	WCDMA IV_Ant Main	RMC 12.2Kbps	Bottom Face	0mm	ON	1312	1712.4	SAA	14.47	15.00	1.130	-0.18	0.847	0.957
	WCDMA IV_Ant Main	RMC 12.2Kbps	Bottom Face	0mm	ON	1413	1732.6	SAA	14.60	15.00	1.096	0.1	0.838	0.919
	WCDMA IV_Ant Main	RMC 12.2Kbps	Bottom Face	0mm	ON	1513	1752.6	SAA	14.58	15.00	1.102	0.12	0.829	0.913
	WCDMA IV_Ant Main	RMC 12.2Kbps	Bottom of Laptop	25mm	OFF	1413	1732.6	SPEED	23.83	25.00	1.309	0.08	0.292	0.382
	WCDMA IV_Ant Main	RMC 12.2Kbps	Bottom Face	25mm	OFF	1413	1732.6	SPEED	23.83	25.00	1.309	-0.03	0.400	0.524
	WCDMA IV_Ant Main	RMC 12.2Kbps	Edge 1	24mm	OFF	1413	1732.6	SPEED	23.83	25.00	1.309	0.14	0.235	0.308
	WCDMA IV_Ant Main	RMC 12.2Kbps	Edge 2	12mm	OFF	1413	1732.6	SPEED	23.83	25.00	1.309	0.11	0.128	0.168
	WCDMA V_Ant Main	RMC 12.2Kbps	Bottom of Laptop	0mm	ON	4182	836.4	SPEED	16.39	17.00	1.151	0.08	0.208	0.239
	WCDMA V_Ant Main	RMC 12.2Kbps	Bottom Face	0mm	ON	4182	836.4	SPEED	16.39	17.00	1.151	0.03	0.902	1.038
	WCDMA V_Ant Main	RMC 12.2Kbps	Bottom Face	0mm	ON	4132	826.4	SPEED	16.30	17.00	1.175	-0.08	0.837	0.983
03	WCDMA V_Ant Main	RMC 12.2Kbps	Bottom Face	0mm	ON	4233	846.6	SPEED	16.36	17.00	1.159	-0.01	0.949	1.100
	WCDMA V_Ant Main	RMC 12.2Kbps	Edge 1	0mm	ON	4182	836.4	SPEED	16.39	17.00	1.151	-0.08	0.107	0.123
	WCDMA V_Ant Main	RMC 12.2Kbps	Edge 2	0mm	ON	4182	836.4	SPEED	16.39	17.00	1.151	0.1	0.601	0.692
	WCDMA V_Ant Main	RMC 12.2Kbps	Bottom Face	0mm	ON	4233	846.6	SAA	16.36	17.00	1.159	-0.18	0.613	0.710
	WCDMA V_Ant Main	RMC 12.2Kbps	Bottom of Laptop	25mm	OFF	4182	836.4	SPEED	24.15	25.00	1.216	-0.05	0.151	0.184
	WCDMA V_Ant Main	RMC 12.2Kbps	Bottom Face	25mm	OFF	4182	836.4	SPEED	24.15	25.00	1.216	0.1	0.121	0.147
	WCDMA V_Ant Main	RMC 12.2Kbps	Edge 1	24mm	OFF	4182	836.4	SPEED	24.15	25.00	1.216	-0.17	0.056	0.068
	WCDMA V_Ant Main	RMC 12.2Kbps	Edge 2	12mm	OFF	4182	836.4	SPEED	24.15	25.00	1.216	0.04	0.140	0.170



<LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Antenna Vendor	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 7_Ant Main	20M	QPSK	1	0	Bottom of Laptop	0mm	ON	21100	2535	SPEED	11.36	12.50	1.300	0.08	0.250	0.325
	LTE Band 7_Ant Main	20M	QPSK	50	0	Bottom of Laptop	0mm	ON	21100	2535	SPEED	10.35	11.50	1.303	-0.17	0.211	0.275
	LTE Band 7_Ant Main	20M	QPSK	1	0	Bottom Face	0mm	ON	21100	2535	SPEED	11.36	12.50	1.300	0.11	0.718	0.934
	LTE Band 7_Ant Main	20M	QPSK	1	0	Bottom Face	0mm	ON	20850	2510	SPEED	11.19	12.50	1.352	-0.05	0.674	0.911
	LTE Band 7_Ant Main	20M	QPSK	1	0	Bottom Face	0mm	ON	21350	2560	SPEED	11.22	12.50	1.343	0.18	0.834	1.120
	LTE Band 7_Ant Main	20M	QPSK	50	0	Bottom Face	0mm	ON	21100	2535	SPEED	10.35	11.50	1.303	0.14	0.605	0.788
	LTE Band 7_Ant Main	20M	QPSK	100	0	Bottom Face	0mm	ON	21350	2560	SPEED	10.30	11.50	1.318	-0.05	0.604	0.796
	LTE Band 7_Ant Main	20M	QPSK	1	0	Edge 1	0mm	ON	21100	2535	SPEED	11.36	12.50	1.300	0.01	0.112	0.146
	LTE Band 7_Ant Main	20M	QPSK	50	0	Edge 1	0mm	ON	21100	2535	SPEED	10.35	11.50	1.303	0.1	0.094	0.122
	LTE Band 7_Ant Main	20M	QPSK	1	0	Edge 2	0mm	ON	21100	2535	SPEED	11.36	12.50	1.300	-0.17	0.053	0.069
	LTE Band 7_Ant Main	20M	QPSK	50	0	Edge 2	0mm	ON	21100	2535	SPEED	10.35	11.50	1.303	0.04	0.044	0.057
	LTE Band 7_Ant Main	20M	QPSK	1	0	Bottom Face	0mm	ON	21100	2535	SAA	11.36	12.50	1.300	-0.01	0.756	0.983
	LTE Band 7_Ant Main	20M	QPSK	1	0	Bottom Face	0mm	ON	20850	2510	SAA	11.19	12.50	1.352	-0.08	0.708	0.957
04	LTE Band 7_Ant Main	20M	QPSK	1	0	Bottom Face	0mm	ON	21350	2560	SAA	11.22	12.50	1.343	0.18	0.889	1.194
	LTE Band 7C_Ant Main	20M	QPSK	1	0	Bottom Face	0mm	ON	21100+20902	2535	SAA	12.37	12.50	1.030	0.1	0.885	0.912
	LTE Band 7C_Ant Main	20M	QPSK	1	0	Bottom Face	0mm	ON	20850+21048	2510	SAA	11.21	12.50	1.346	0.12	0.685	0.922
	LTE Band 7C_Ant Main	20M	QPSK	1	0	Bottom Face	0mm	ON	21350+21152	2560	SAA	12.32	12.50	1.042	0.08	1.020	1.063
	LTE Band 7_Ant Main	20M	QPSK	1	0	Bottom of Laptop	25mm	OFF	21100	2535	SPEED	23.62	25.00	1.374	-0.01	0.141	0.194
	LTE Band 7_Ant Main	20M	QPSK	50	0	Bottom of Laptop	25mm	OFF	21100	2535	SPEED	22.68	24.00	1.355	-0.08	0.118	0.160
	LTE Band 7_Ant Main	20M	QPSK	1	0	Bottom Face	25mm	OFF	21100	2535	SPEED	23.62	25.00	1.374	-0.09	0.172	0.236
	LTE Band 7_Ant Main	20M	QPSK	50	0	Bottom Face	25mm	OFF	21100	2535	SPEED	22.68	24.00	1.355	-0.08	0.141	0.191
	LTE Band 7_Ant Main	20M	QPSK	1	0	Edge 1	24mm	OFF	21100	2535	SPEED	23.62	25.00	1.374	0.13	0.170	0.234
	LTE Band 7_Ant Main	20M	QPSK	50	0	Edge 1	24mm	OFF	21100	2535	SPEED	22.68	24.00	1.355	0.12	0.138	0.187
	LTE Band 7_Ant Main	20M	QPSK	1	0	Edge 2	12mm	OFF	21100	2535	SPEED	23.62	25.00	1.374	0.03	0.105	0.144
	LTE Band 7_Ant Main	20M	QPSK	50	0	Edge 2	12mm	OFF	21100	2535	SPEED	22.68	24.00	1.355	0.18	0.085	0.115



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Antenna Vendor	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 7_Ant MIMO2	20M	QPSK	1	0	Bottom of Laptop	0mm	ON	21100	2535	SPEED	9.14	9.50	1.086	0.08	0.113	0.123
	LTE Band 7_Ant MIMO2	20M	QPSK	50	0	Bottom of Laptop	0mm	ON	21100	2535	SPEED	9.12	9.50	1.091	0.01	0.110	0.120
	LTE Band 7_Ant MIMO2	20M	QPSK	1	0	Bottom Face	0mm	ON	21100	2535	SPEED	9.14	9.50	1.086	-0.08	1.030	1.119
	LTE Band 7_Ant MIMO2	20M	QPSK	1	0	Bottom Face	0mm	ON	20850	2510	SPEED	9.10	9.50	1.096	0.1	0.946	1.037
	LTE Band 7_Ant MIMO2	20M	QPSK	1	0	Bottom Face	0mm	ON	21350	2560	SPEED	9.11	9.50	1.094	0.02	1.040	1.138
	LTE Band 7_Ant MIMO2	20M	QPSK	50	0	Bottom Face	0mm	ON	21100	2535	SPEED	9.12	9.50	1.091	-0.18	1.030	1.124
	LTE Band 7_Ant MIMO2	20M	QPSK	50	0	Bottom Face	0mm	ON	20850	2510	SPEED	9.07	9.50	1.104	0.1	0.941	1.039
	LTE Band 7_Ant MIMO2	20M	QPSK	50	0	Bottom Face	0mm	ON	21350	2560	SPEED	9.10	9.50	1.096	0.07	1.040	1.140
	LTE Band 7_Ant MIMO2	20M	QPSK	100	0	Bottom Face	0mm	ON	21350	2560	SPEED	9.05	9.50	1.109	0.12	1.000	1.109
	LTE Band 7_Ant MIMO2	20M	QPSK	1	0	Edge 1	0mm	ON	21100	2535	SPEED	9.14	9.50	1.086	0.08	0.010	0.011
	LTE Band 7_Ant MIMO2	20M	QPSK	50	0	Edge 1	0mm	ON	21100	2535	SPEED	9.12	9.50	1.091	-0.17	0.005	0.005
	LTE Band 7_Ant MIMO2	20M	QPSK	1	0	Edge 4	0mm	ON	21100	2535	SPEED	9.14	9.50	1.086	0.02	1.010	1.097
	LTE Band 7_Ant MIMO2	20M	QPSK	1	0	Edge 4	0mm	ON	20850	2510	SPEED	9.10	9.50	1.096	-0.03	0.928	1.018
	LTE Band 7_Ant MIMO2	20M	QPSK	1	0	Edge 4	0mm	ON	21350	2560	SPEED	9.11	9.50	1.094	0.14	1.000	1.094
	LTE Band 7_Ant MIMO2	20M	QPSK	50	0	Edge 4	0mm	ON	21100	2535	SPEED	9.12	9.50	1.091	0.11	0.998	1.089
	LTE Band 7_Ant MIMO2	20M	QPSK	50	0	Edge 4	0mm	ON	20850	2510	SPEED	9.07	9.50	1.104	-0.05	0.923	1.019
	LTE Band 7_Ant MIMO2	20M	QPSK	50	0	Edge 4	0mm	ON	21350	2560	SPEED	9.10	9.50	1.096	0.18	0.995	1.091
	LTE Band 7_Ant MIMO2	20M	QPSK	100	0	Edge 4	0mm	ON	21100	2535	SPEED	9.07	9.50	1.104	0.14	0.981	1.083
	LTE Band 7_Ant MIMO2	20M	QPSK	50	0	Bottom Face	0mm	ON	21350	2560	SAA	9.10	9.50	1.096	-0.17	0.955	1.047
	LTE Band 7_Ant MIMO2	20M	QPSK	50	0	Bottom Face	0mm	ON	21100	2535	SAA	9.12	9.50	1.091	0.17	0.940	1.026
	LTE Band 7_Ant MIMO2	20M	QPSK	50	0	Bottom Face	0mm	ON	20850	2510	SAA	9.07	9.50	1.104	-0.05	0.946	1.044
	LTE Band 7_Ant MIMO2	20M	QPSK	1	0	Bottom of Laptop	17mm	OFF	21100	2535	SPEED	23.24	24.00	1.191	0.16	0.303	0.361
	LTE Band 7_Ant MIMO2	20M	QPSK	50	0	Bottom of Laptop	17mm	OFF	21100	2535	SPEED	22.21	23.00	1.199	-0.1	0.247	0.296
	LTE Band 7_Ant MIMO2	20M	QPSK	1	0	Bottom Face	19mm	OFF	21100	2535	SPEED	23.24	24.00	1.191	-0.1	0.601	0.716
	LTE Band 7_Ant MIMO2	20M	QPSK	50	0	Bottom Face	19mm	OFF	21100	2535	SPEED	22.21	23.00	1.199	0.01	0.489	0.587
	LTE Band 7_Ant MIMO2	20M	QPSK	1	0	Edge 1	22mm	OFF	21100	2535	SPEED	23.24	24.00	1.191	-0.15	0.061	0.073
	LTE Band 7_Ant MIMO2	20M	QPSK	50	0	Edge 1	22mm	OFF	21100	2535	SPEED	22.21	23.00	1.199	0.19	0.050	0.060
	LTE Band 7_Ant MIMO2	20M	QPSK	1	0	Edge 4	22mm	OFF	21100	2535	SPEED	23.24	24.00	1.191	0.07	0.645	0.768
	LTE Band 7_Ant MIMO2	20M	QPSK	50	0	Edge 4	22mm	OFF	21100	2535	SPEED	22.21	23.00	1.199	-0.18	0.525	0.630



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Antenna Vendor	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 12_Ant Main	10M	QPSK	1	0	Bottom of Laptop	0mm	ON	23095	707.5	SPEED	15.34	16.50	1.306	-0.1	0.150	0.196
	LTE Band 12_Ant Main	10M	QPSK	25	0	Bottom of Laptop	0mm	ON	23095	707.5	SPEED	14.31	15.50	1.315	0.01	0.116	0.153
05	LTE Band 12_Ant Main	10M	QPSK	1	0	Bottom Face	0mm	ON	23095	707.5	SPEED	15.34	16.50	1.306	0.09	0.839	1.096
	LTE Band 12_Ant Main	10M	QPSK	25	0	Bottom Face	0mm	ON	23095	707.5	SPEED	14.31	15.50	1.315	-0.18	0.645	0.848
	LTE Band 12_Ant Main	10M	QPSK	50	0	Bottom Face	0mm	ON	23095	707.5	SPEED	14.26	15.50	1.330	0.01	0.615	0.818
	LTE Band 12_Ant Main	10M	QPSK	1	0	Edge 1	0mm	ON	23095	707.5	SPEED	15.34	16.50	1.306	0.03	0.043	0.056
	LTE Band 12_Ant Main	10M	QPSK	25	0	Edge 1	0mm	ON	23095	707.5	SPEED	14.31	15.50	1.315	-0.15	0.033	0.043
	LTE Band 12_Ant Main	10M	QPSK	1	0	Edge 2	0mm	ON	23095	707.5	SPEED	15.34	16.50	1.306	0.01	0.741	0.968
	LTE Band 12_Ant Main	10M	QPSK	25	0	Edge 2	0mm	ON	23095	707.5	SPEED	14.31	15.50	1.315	0.07	0.571	0.751
	LTE Band 12_Ant Main	10M	QPSK	50	0	Edge 2	0mm	ON	23095	707.5	SPEED	14.26	15.50	1.330	0.07	0.546	0.726
	LTE Band 12_Ant Main	10M	QPSK	1	0	Bottom Face	0mm	ON	23095	707.5	SAA	15.34	16.50	1.306	0.18	0.552	0.721
	LTE Band 12_Ant Main	10M	QPSK	1	0	Bottom of Laptop	25mm	OFF	23095	707.5	SPEED	23.60	25.00	1.380	0.08	0.064	0.088
	LTE Band 12_Ant Main	10M	QPSK	25	0	Bottom of Laptop	25mm	OFF	23095	707.5	SPEED	22.64	24.00	1.368	0.01	0.051	0.070
	LTE Band 12_Ant Main	10M	QPSK	1	0	Bottom Face	25mm	OFF	23095	707.5	SPEED	23.60	25.00	1.380	-0.08	0.049	0.068
	LTE Band 12_Ant Main	10M	QPSK	25	0	Bottom Face	25mm	OFF	23095	707.5	SPEED	22.64	24.00	1.368	0.1	0.045	0.062
	LTE Band 12_Ant Main	10M	QPSK	1	0	Edge 1	24mm	OFF	23095	707.5	SPEED	23.60	25.00	1.380	-0.18	0.031	0.043
	LTE Band 12_Ant Main	10M	QPSK	25	0	Edge 1	24mm	OFF	23095	707.5	SPEED	22.64	24.00	1.368	0.1	0.028	0.038
	LTE Band 12_Ant Main	10M	QPSK	1	0	Edge 2	12mm	OFF	23095	707.5	SPEED	23.60	25.00	1.380	0.12	0.112	0.155
	LTE Band 12_Ant Main	10M	QPSK	25	0	Edge 2	12mm	OFF	23095	707.5	SPEED	22.64	24.00	1.368	0.08	0.093	0.127
	LTE Band 13_Ant Main	10M	QPSK	1	0	Bottom of Laptop	0mm	ON	23230	782	SPEED	17.62	19.00	1.374	-0.08	0.319	0.438
	LTE Band 13_Ant Main	10M	QPSK	25	0	Bottom of Laptop	0mm	ON	23230	782	SPEED	16.68	18.00	1.355	0.05	0.272	0.369
06	LTE Band 13_Ant Main	10M	QPSK	1	0	Bottom Face	0mm	ON	23230	782	SPEED	17.62	19.00	1.374	-0.1	0.860	1.182
	LTE Band 13_Ant Main	10M	QPSK	25	0	Bottom Face	0mm	ON	23230	782	SPEED	16.68	18.00	1.355	0.13	0.734	0.995
	LTE Band 13_Ant Main	10M	QPSK	50	0	Bottom Face	0mm	ON	23230	782	SPEED	16.57	18.00	1.390	0.13	0.631	0.877
	LTE Band 13_Ant Main	10M	QPSK	1	0	Edge 1	0mm	ON	23230	782	SPEED	17.62	19.00	1.374	0.12	0.173	0.238
	LTE Band 13_Ant Main	10M	QPSK	25	0	Edge 1	0mm	ON	23230	782	SPEED	16.68	18.00	1.355	0.03	0.147	0.199
	LTE Band 13_Ant Main	10M	QPSK	1	0	Edge 2	0mm	ON	23230	782	SPEED	17.62	19.00	1.374	-0.07	0.848	1.165
	LTE Band 13_Ant Main	10M	QPSK	25	0	Edge 2	0mm	ON	23230	782	SPEED	16.68	18.00	1.355	0.16	0.731	0.991
	LTE Band 13_Ant Main	10M	QPSK	50	0	Edge 2	0mm	ON	23230	782	SPEED	16.57	18.00	1.390	0.16	0.628	0.873
	LTE Band 13_Ant Main	10M	QPSK	1	0	Bottom Face	0mm	ON	23230	782	SAA	17.62	19.00	1.374	-0.1	0.739	1.015
	LTE Band 13_Ant Main	10M	QPSK	1	0	Bottom of Laptop	25mm	OFF	23230	782	SPEED	23.61	25.00	1.377	-0.05	0.130	0.179
	LTE Band 13_Ant Main	10M	QPSK	25	0	Bottom of Laptop	25mm	OFF	23230	782	SPEED	22.67	24.00	1.358	-0.17	0.110	0.149
	LTE Band 13_Ant Main	10M	QPSK	1	0	Bottom Face	25mm	OFF	23230	782	SPEED	23.61	25.00	1.377	0.11	0.116	0.160
	LTE Band 13_Ant Main	10M	QPSK	25	0	Bottom Face	25mm	OFF	23230	782	SPEED	22.67	24.00	1.358	-0.05	0.096	0.130
	LTE Band 13_Ant Main	10M	QPSK	1	0	Edge 1	24mm	OFF	23230	782	SPEED	23.61	25.00	1.377	0.18	0.067	0.092
	LTE Band 13_Ant Main	10M	QPSK	25	0	Edge 1	24mm	OFF	23230	782	SPEED	22.67	24.00	1.358	0.14	0.058	0.079
	LTE Band 13_Ant Main	10M	QPSK	1	0	Edge 2	12mm	OFF	23230	782	SPEED	23.61	25.00	1.377	-0.17	0.252	0.347
	LTE Band 13_Ant Main	10M	QPSK	25	0	Edge 2	12mm	OFF	23230	782	SPEED	22.67	24.00	1.358	0.17	0.218	0.296



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Antenna Vendor	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 14_Ant Main	10M	QPSK	1	0	Bottom of Laptop	0mm	ON	23330	793	SPEED	17.74	19.00	1.337	0.08	0.297	0.397
	LTE Band 14_Ant Main	10M	QPSK	25	0	Bottom of Laptop	0mm	ON	23330	793	SPEED	16.80	18.00	1.318	0.01	0.240	0.316
07	LTE Band 14_Ant Main	10M	QPSK	1	0	Bottom Face	0mm	ON	23330	793	SPEED	17.74	19.00	1.337	0.06	0.888	1.187
	LTE Band 14_Ant Main	10M	QPSK	25	0	Bottom Face	0mm	ON	23330	793	SPEED	16.80	18.00	1.318	0.1	0.710	0.936
	LTE Band 14_Ant Main	10M	QPSK	50	0	Bottom Face	0mm	ON	23330	793	SPEED	16.69	18.00	1.352	0.06	0.705	0.953
	LTE Band 14_Ant Main	10M	QPSK	1	0	Edge 1	0mm	ON	23330	793	SPEED	17.74	19.00	1.337	-0.18	0.160	0.214
	LTE Band 14_Ant Main	10M	QPSK	25	0	Edge 1	0mm	ON	23330	793	SPEED	16.80	18.00	1.318	0.1	0.129	0.170
	LTE Band 14_Ant Main	10M	QPSK	1	0	Edge 2	0mm	ON	23330	793	SPEED	17.74	19.00	1.337	-0.01	0.815	1.089
	LTE Band 14_Ant Main	10M	QPSK	25	0	Edge 2	0mm	ON	23330	793	SPEED	16.80	18.00	1.318	0.08	0.654	0.862
	LTE Band 14_Ant Main	10M	QPSK	50	0	Edge 2	0mm	ON	23330	793	SPEED	16.69	18.00	1.352	0.08	0.651	0.880
	LTE Band 14_Ant Main	10M	QPSK	1	0	Bottom Face	0mm	ON	23330	793	SAA	17.74	19.00	1.337	-0.17	0.699	0.934
	LTE Band 14_Ant Main	10M	QPSK	1	0	Bottom of Laptop	25mm	OFF	23330	793	SPEED	23.85	25.00	1.303	0.01	0.157	0.205
	LTE Band 14_Ant Main	10M	QPSK	25	0	Bottom of Laptop	25mm	OFF	23330	793	SPEED	22.88	24.00	1.294	0.1	0.126	0.163
	LTE Band 14_Ant Main	10M	QPSK	1	0	Bottom Face	25mm	OFF	23330	793	SPEED	23.85	25.00	1.303	-0.01	0.135	0.176
	LTE Band 14_Ant Main	10M	QPSK	25	0	Bottom Face	25mm	OFF	23330	793	SPEED	22.88	24.00	1.294	-0.08	0.108	0.140
	LTE Band 14_Ant Main	10M	QPSK	1	0	Edge 1	24mm	OFF	23330	793	SPEED	23.85	25.00	1.303	0.05	0.071	0.093
	LTE Band 14_Ant Main	10M	QPSK	25	0	Edge 1	24mm	OFF	23330	793	SPEED	22.88	24.00	1.294	0.06	0.052	0.067
	LTE Band 14_Ant Main	10M	QPSK	1	0	Edge 2	12mm	OFF	23330	793	SPEED	23.85	25.00	1.303	-0.09	0.215	0.280
	LTE Band 14_Ant Main	10M	QPSK	25	0	Edge 2	12mm	OFF	23330	793	SPEED	22.88	24.00	1.294	-0.08	0.165	0.214
	LTE Band 25_Ant Main	20M	QPSK	1	0	Bottom of Laptop	0mm	ON	26340	1880	SPEED	13.50	14.50	1.259	-0.03	0.235	0.296
	LTE Band 25_Ant Main	20M	QPSK	50	0	Bottom of Laptop	0mm	ON	26340	1880	SPEED	12.73	13.50	1.194	0.14	0.188	0.224
	LTE Band 25_Ant Main	20M	QPSK	1	0	Bottom Face	0mm	ON	26340	1880	SPEED	13.50	14.50	1.259	0.01	0.855	1.076
	LTE Band 25_Ant Main	20M	QPSK	1	0	Bottom Face	0mm	ON	26140	1860	SPEED	13.48	14.50	1.265	0.01	0.845	1.069
	LTE Band 25_Ant Main	20M	QPSK	1	0	Bottom Face	0mm	ON	26590	1905	SPEED	13.49	14.50	1.262	0.14	0.833	1.051
	LTE Band 25_Ant Main	20M	QPSK	50	0	Bottom Face	0mm	ON	26340	1880	SPEED	12.73	13.50	1.194	-0.17	0.719	0.858
	LTE Band 25_Ant Main	20M	QPSK	50	0	Bottom Face	0mm	ON	26140	1860	SPEED	12.66	13.50	1.213	0.17	0.707	0.858
	LTE Band 25_Ant Main	20M	QPSK	50	0	Bottom Face	0mm	ON	26590	1905	SPEED	12.69	13.50	1.205	-0.05	0.701	0.845
	LTE Band 25_Ant Main	20M	QPSK	100	0	Bottom Face	0mm	ON	26340	1880	SPEED	12.71	13.50	1.199	-0.17	0.684	0.820
	LTE Band 25_Ant Main	20M	QPSK	1	0	Edge 1	0mm	ON	26340	1880	SPEED	13.50	14.50	1.259	0.01	0.201	0.253
	LTE Band 25_Ant Main	20M	QPSK	50	0	Edge 1	0mm	ON	26340	1880	SPEED	12.73	13.50	1.194	0.1	0.162	0.193
	LTE Band 25_Ant Main	20M	QPSK	1	0	Edge 2	0mm	ON	26340	1880	SPEED	13.50	14.50	1.259	-0.17	0.237	0.298
	LTE Band 25_Ant Main	20M	QPSK	50	0	Edge 2	0mm	ON	26340	1880	SPEED	12.73	13.50	1.194	0.04	0.192	0.229
	LTE Band 25_Ant Main	20M	QPSK	1	0	Bottom Face	0mm	ON	26340	1880	SAA	13.50	14.50	1.259	0.08	0.705	0.888
	LTE Band 25_Ant Main	20M	QPSK	1	0	Bottom Face	0mm	ON	26140	1860	SAA	13.48	14.50	1.265	-0.01	0.697	0.882
	LTE Band 25_Ant Main	20M	QPSK	1	0	Bottom Face	0mm	ON	26590	1905	SAA	13.49	14.50	1.262	0.01	0.687	0.867
	LTE Band 25_Ant Main	20M	QPSK	1	0	Bottom of Laptop	25mm	OFF	26340	1880	SPEED	23.49	25.00	1.416	0.13	0.215	0.304
	LTE Band 25_Ant Main	20M	QPSK	50	0	Bottom of Laptop	25mm	OFF	26340	1880	SPEED	22.44	24.00	1.432	0.12	0.172	0.246
	LTE Band 25_Ant Main	20M	QPSK	1	0	Bottom Face	25mm	OFF	26340	1880	SPEED	23.49	25.00	1.416	0.16	0.276	0.391
	LTE Band 25_Ant Main	20M	QPSK	50	0	Bottom Face	25mm	OFF	26340	1880	SPEED	22.44	24.00	1.432	-0.1	0.225	0.322
	LTE Band 25_Ant Main	20M	QPSK	1	0	Edge 1	24mm	OFF	26340	1880	SPEED	23.49	25.00	1.416	0.07	0.291	0.412
	LTE Band 25_Ant Main	20M	QPSK	50	0	Edge 1	24mm	OFF	26340	1880	SPEED	22.44	24.00	1.432	0.18	0.225	0.322
	LTE Band 25_Ant Main	20M	QPSK	1	0	Edge 2	12mm	OFF	26340	1880	SPEED	23.49	25.00	1.416	-0.1	0.091	0.129
	LTE Band 25_Ant Main	20M	QPSK	50	0	Edge 2	12mm	OFF	26340	1880	SPEED	22.44	24.00	1.432	0.01	0.071	0.102



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Antenna Vendor	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 25_Ant MIMO2	20M	QPSK	1	0	Bottom of Laptop	0mm	ON	26340	1880	SPEED	12.05	12.50	1.109	0.08	0.210	0.233
	LTE Band 25_Ant MIMO2	20M	QPSK	50	0	Bottom of Laptop	0mm	ON	26340	1880	SPEED	11.99	12.50	1.125	0.01	0.204	0.229
	LTE Band 25_Ant MIMO2	20M	QPSK	1	0	Bottom Face	0mm	ON	26340	1880	SPEED	12.05	12.50	1.109	-0.08	0.669	0.742
	LTE Band 25_Ant MIMO2	20M	QPSK	50	0	Bottom Face	0mm	ON	26340	1880	SPEED	11.99	12.50	1.125	0.1	0.651	0.732
	LTE Band 25_Ant MIMO2	20M	QPSK	1	0	Edge 1	0mm	ON	26340	1880	SPEED	12.05	12.50	1.109	-0.03	0.018	0.020
	LTE Band 25_Ant MIMO2	20M	QPSK	50	0	Edge 1	0mm	ON	26340	1880	SPEED	11.99	12.50	1.125	0.14	0.017	0.019
	LTE Band 25_Ant MIMO2	20M	QPSK	1	0	Edge 4	0mm	ON	26340	1880	SPEED	12.05	12.50	1.109	0.11	0.856	0.949
	LTE Band 25_Ant MIMO2	20M	QPSK	1	0	Edge 4	0mm	ON	26140	1860	SPEED	11.98	12.50	1.127	-0.05	0.840	0.947
	LTE Band 25_Ant MIMO2	20M	QPSK	1	0	Edge 4	0mm	ON	26590	1905	SPEED	12.04	12.50	1.112	0.18	0.767	0.853
	LTE Band 25_Ant MIMO2	20M	QPSK	50	0	Edge 4	0mm	ON	26340	1880	SPEED	11.99	12.50	1.125	0.14	0.833	0.937
	LTE Band 25_Ant MIMO2	20M	QPSK	50	0	Edge 4	0mm	ON	26140	1860	SPEED	11.94	12.50	1.138	-0.17	0.817	0.929
	LTE Band 25_Ant MIMO2	20M	QPSK	50	0	Edge 4	0mm	ON	26590	1905	SPEED	11.98	12.50	1.127	0.17	0.746	0.841
	LTE Band 25_Ant MIMO2	20M	QPSK	100	0	Edge 4	0mm	ON	26340	1880	SPEED	11.96	12.50	1.132	-0.05	0.816	0.924
	LTE Band 25_Ant MIMO2	20M	QPSK	1	0	Edge 4	0mm	ON	26340	1880	SAA	12.05	12.50	1.109	-0.17	0.992	1.100
08	LTE Band 25_Ant MIMO2	20M	QPSK	1	0	Edge 4	0mm	ON	26140	1860	SAA	11.98	12.50	1.127	-0.03	0.997	1.124
	LTE Band 25_Ant MIMO2	20M	QPSK	1	0	Edge 4	0mm	ON	26590	1905	SAA	12.04	12.50	1.112	-0.01	0.906	1.007
	LTE Band 25_Ant MIMO2	20M	QPSK	1	0	Bottom of Laptop	17mm	OFF	26340	1880	SPEED	23.22	24.00	1.197	-0.15	0.326	0.390
	LTE Band 25_Ant MIMO2	20M	QPSK	50	0	Bottom of Laptop	17mm	OFF	26340	1880	SPEED	22.26	23.00	1.186	0.19	0.262	0.311
	LTE Band 25_Ant MIMO2	20M	QPSK	1	0	Bottom Face	19mm	OFF	26340	1880	SPEED	23.22	24.00	1.197	0.03	0.459	0.549
	LTE Band 25_Ant MIMO2	20M	QPSK	50	0	Bottom Face	19mm	OFF	26340	1880	SPEED	22.26	23.00	1.186	-0.15	0.311	0.369
	LTE Band 25_Ant MIMO2	20M	QPSK	1	0	Edge 1	22mm	OFF	26340	1880	SPEED	23.22	24.00	1.197	-0.15	0.047	0.056
	LTE Band 25_Ant MIMO2	20M	QPSK	50	0	Edge 1	22mm	OFF	26340	1880	SPEED	22.26	23.00	1.186	0.11	0.038	0.045
	LTE Band 25_Ant MIMO2	20M	QPSK	1	0	Edge 4	22mm	OFF	26340	1880	SPEED	23.22	24.00	1.197	-0.08	0.592	0.708
	LTE Band 25_Ant MIMO2	20M	QPSK	50	0	Edge 4	22mm	OFF	26340	1880	SPEED	22.26	23.00	1.186	-0.17	0.484	0.574
	LTE Band 26_Ant Main	15M	QPSK	1	0	Bottom of Laptop	0mm	ON	26865	831.5	SPEED	17.08	18.00	1.236	0.12	0.277	0.342
	LTE Band 26_Ant Main	15M	QPSK	36	0	Bottom of Laptop	0mm	ON	26865	831.5	SPEED	16.08	17.00	1.236	0.03	0.228	0.282
09	LTE Band 26_Ant Main	15M	QPSK	1	0	Bottom Face	0mm	ON	26865	831.5	SPEED	17.08	18.00	1.236	-0.01	0.884	1.093
	LTE Band 26_Ant Main	15M	QPSK	36	0	Bottom Face	0mm	ON	26865	831.5	SPEED	16.08	17.00	1.236	0.18	0.727	0.899
	LTE Band 26_Ant Main	15M	QPSK	75	0	Bottom Face	0mm	ON	26865	831.5	SPEED	15.98	17.00	1.265	0.16	0.776	0.981
	LTE Band 26_Ant Main	15M	QPSK	1	0	Edge 1	0mm	ON	26865	831.5	SPEED	17.08	18.00	1.236	-0.1	0.120	0.148
	LTE Band 26_Ant Main	15M	QPSK	36	0	Edge 1	0mm	ON	26865	831.5	SPEED	16.08	17.00	1.236	0.07	0.099	0.122
	LTE Band 26_Ant Main	15M	QPSK	1	0	Edge 2	0mm	ON	26865	831.5	SPEED	17.08	18.00	1.236	0.18	0.669	0.827
	LTE Band 26_Ant Main	15M	QPSK	36	0	Edge 2	0mm	ON	26865	831.5	SPEED	16.08	17.00	1.236	-0.1	0.551	0.681
	LTE Band 26_Ant Main	15M	QPSK	75	0	Edge 2	0mm	ON	26865	831.5	SPEED	15.98	17.00	1.265	0.06	0.585	0.740
	LTE Band 26_Ant Main	15M	QPSK	1	0	Bottom Face	0mm	ON	26865	831.5	SAA	17.08	18.00	1.236	0.01	0.580	0.717
	LTE Band 26_Ant Main	15M	QPSK	1	0	Bottom of Laptop	25mm	OFF	26865	831.5	SPEED	23.36	25.00	1.459	-0.08	0.126	0.184
	LTE Band 26_Ant Main	15M	QPSK	36	0	Bottom of Laptop	25mm	OFF	26865	831.5	SPEED	22.44	24.00	1.432	-0.04	0.098	0.140
	LTE Band 26_Ant Main	15M	QPSK	1	0	Bottom Face	25mm	OFF	26865	831.5	SPEED	23.36	25.00	1.459	0.18	0.114	0.166
	LTE Band 26_Ant Main	15M	QPSK	36	0	Bottom Face	25mm	OFF	26865	831.5	SPEED	22.44	24.00	1.432	-0.04	0.090	0.129
	LTE Band 26_Ant Main	15M	QPSK	1	0	Edge 1	24mm	OFF	26865	831.5	SPEED	23.36	25.00	1.459	-0.08	0.046	0.067
	LTE Band 26_Ant Main	15M	QPSK	36	0	Edge 1	24mm	OFF	26865	831.5	SPEED	22.44	24.00	1.432	-0.13	0.035	0.050
	LTE Band 26_Ant Main	15M	QPSK	1	0	Edge 2	12mm	OFF	26865	831.5	SPEED	23.36	25.00	1.459	-0.13	0.143	0.209
	LTE Band 26_Ant Main	15M	QPSK	36	0	Edge 2	12mm	OFF	26865	831.5	SPEED	22.44	24.00	1.432	0.06	0.120	0.172



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Antenna Vendor	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 30_Ant Main	10M	QPSK	1	0	Bottom of Laptop	0mm	ON	27710	2310	SPEED	12.74	13.50	1.191	-0.09	0.263	0.313
	LTE Band 30_Ant Main	10M	QPSK	25	0	Bottom of Laptop	0mm	ON	27710	2310	SPEED	11.60	12.50	1.230	0.15	0.251	0.309
10	LTE Band 30_Ant Main	10M	QPSK	1	0	Bottom Face	0mm	ON	27710	2310	SPEED	12.74	13.50	1.191	0.12	0.975	1.161
	LTE Band 30_Ant Main	10M	QPSK	25	0	Bottom Face	0mm	ON	27710	2310	SPEED	11.60	12.50	1.230	-0.04	0.922	1.134
	LTE Band 30_Ant Main	10M	QPSK	50	0	Bottom Face	0mm	ON	27710	2310	SPEED	11.57	12.50	1.239	0.01	0.908	1.125
	LTE Band 30_Ant Main	10M	QPSK	1	0	Edge 1	0mm	ON	27710	2310	SPEED	12.74	13.50	1.191	0.14	0.189	0.225
	LTE Band 30_Ant Main	10M	QPSK	25	0	Edge 1	0mm	ON	27710	2310	SPEED	11.60	12.50	1.230	0.13	0.173	0.213
	LTE Band 30_Ant Main	10M	QPSK	1	0	Edge 2	0mm	ON	27710	2310	SPEED	12.74	13.50	1.191	-0.1	0.360	0.429
	LTE Band 30_Ant Main	10M	QPSK	25	0	Edge 2	0mm	ON	27710	2310	SPEED	11.60	12.50	1.230	-0.19	0.348	0.428
	LTE Band 30_Ant Main	10M	QPSK	1	0	Bottom Face	0mm	ON	27710	2310	SAA	12.74	13.50	1.191	0.17	0.852	1.015
	LTE Band 30_Ant Main	10M	QPSK	1	0	Bottom of Laptop	25mm	OFF	27710	2310	SPEED	21.67	23.00	1.358	0.15	0.084	0.114
	LTE Band 30_Ant Main	10M	QPSK	25	0	Bottom of Laptop	25mm	OFF	27710	2310	SPEED	20.61	22.00	1.377	-0.09	0.068	0.094
	LTE Band 30_Ant Main	10M	QPSK	1	0	Bottom Face	25mm	OFF	27710	2310	SPEED	21.67	23.00	1.358	-0.08	0.214	0.291
	LTE Band 30_Ant Main	10M	QPSK	25	0	Bottom Face	25mm	OFF	27710	2310	SPEED	20.61	22.00	1.377	0.16	0.176	0.242
	LTE Band 30_Ant Main	10M	QPSK	1	0	Edge 1	24mm	OFF	27710	2310	SPEED	21.67	23.00	1.358	0.05	0.095	0.129
	LTE Band 30_Ant Main	10M	QPSK	25	0	Edge 1	24mm	OFF	27710	2310	SPEED	20.61	22.00	1.377	0.05	0.079	0.109
	LTE Band 30_Ant Main	10M	QPSK	1	0	Edge 2	12mm	OFF	27710	2310	SPEED	21.67	23.00	1.358	-0.03	0.412	0.560
	LTE Band 30_Ant Main	10M	QPSK	25	0	Edge 2	12mm	OFF	27710	2310	SPEED	20.61	22.00	1.377	-0.15	0.337	0.464
	LTE Band 30_Ant MIMO2	10M	QPSK	1	0	Bottom of Laptop	0mm	ON	27710	2310	SPEED	10.73	11.50	1.194	0.03	0.107	0.128
	LTE Band 30_Ant MIMO2	10M	QPSK	25	0	Bottom of Laptop	0mm	ON	27710	2310	SPEED	10.72	11.50	1.197	-0.09	0.101	0.121
	LTE Band 30_Ant MIMO2	10M	QPSK	1	0	Bottom Face	0mm	ON	27710	2310	SPEED	10.73	11.50	1.194	0.02	0.768	0.917
	LTE Band 30_Ant MIMO2	10M	QPSK	25	0	Bottom Face	0mm	ON	27710	2310	SPEED	10.72	11.50	1.197	-0.01	0.747	0.894
	LTE Band 30_Ant MIMO2	10M	QPSK	50	0	Bottom Face	0mm	ON	27710	2310	SPEED	10.65	11.50	1.216	0.05	0.741	0.901
	LTE Band 30_Ant MIMO2	10M	QPSK	1	0	Edge 1	0mm	ON	27710	2310	SPEED	10.73	11.50	1.194	0.07	0.010	0.012
	LTE Band 30_Ant MIMO2	10M	QPSK	25	0	Edge 1	0mm	ON	27710	2310	SPEED	10.72	11.50	1.197	0.02	0.008	0.010
	LTE Band 30_Ant MIMO2	10M	QPSK	1	0	Edge 4	0mm	ON	27710	2310	SPEED	10.73	11.50	1.194	-0.11	0.660	0.788
	LTE Band 30_Ant MIMO2	10M	QPSK	25	0	Edge 4	0mm	ON	27710	2310	SPEED	10.72	11.50	1.197	-0.07	0.651	0.779
	LTE Band 30_Ant MIMO2	10M	QPSK	1	0	Bottom Face	0mm	ON	27710	2310	SAA	10.73	11.50	1.194	-0.09	0.933	1.114
	LTE Band 30_Ant MIMO2	10M	QPSK	1	0	Bottom of Laptop	17mm	OFF	27710	2310	SPEED	21.89	23.00	1.291	0.02	0.250	0.323
	LTE Band 30_Ant MIMO2	10M	QPSK	25	0	Bottom of Laptop	17mm	OFF	27710	2310	SPEED	20.77	22.00	1.327	0.07	0.168	0.223
	LTE Band 30_Ant MIMO2	10M	QPSK	1	0	Bottom Face	19mm	OFF	27710	2310	SPEED	21.89	23.00	1.291	-0.18	0.320	0.413
	LTE Band 30_Ant MIMO2	10M	QPSK	25	0	Bottom Face	19mm	OFF	27710	2310	SPEED	20.77	22.00	1.327	0.02	0.255	0.338
	LTE Band 30_Ant MIMO2	10M	QPSK	1	0	Edge 1	22mm	OFF	27710	2310	SPEED	21.89	23.00	1.291	0.16	0.001	0.001
	LTE Band 30_Ant MIMO2	10M	QPSK	25	0	Edge 1	22mm	OFF	27710	2310	SPEED	20.77	22.00	1.327	-0.03	0.001	0.001
	LTE Band 30_Ant MIMO2	10M	QPSK	1	0	Edge 4	22mm	OFF	27710	2310	SPEED	21.89	23.00	1.291	0.07	0.437	0.564
	LTE Band 30_Ant MIMO2	10M	QPSK	25	0	Edge 4	22mm	OFF	27710	2310	SPEED	20.77	22.00	1.327	0	0.417	0.554



FCC SAR TEST REPORT

Report No. : FA3O1305

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Antenna Vendor	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41_Ant Main	20M	QPSK	1	0	Bottom of Laptop	0mm	ON	40620	2593	SPEED	13.53	14.00	1.114	62.9	1.006	0.08	0.288	0.323
	LTE Band 41_Ant Main	20M	QPSK	50	0	Bottom of Laptop	0mm	ON	40620	2593	SPEED	12.64	13.00	1.086	62.9	1.006	0.01	0.250	0.273
	LTE Band 41_Ant Main	20M	QPSK	1	0	Bottom Face	0mm	ON	40620	2593	SPEED	13.53	14.00	1.114	62.9	1.006	0.01	0.898	1.007
	LTE Band 41_Ant Main	20M	QPSK	1	0	Bottom Face	0mm	ON	39750	2506	SPEED	13.44	14.00	1.138	62.9	1.006	-0.08	0.635	0.727
	LTE Band 41_Ant Main	20M	QPSK	1	0	Bottom Face	0mm	ON	40185	2549.5	SPEED	13.52	14.00	1.117	62.9	1.006	0.1	0.826	0.928
	LTE Band 41_Ant Main	20M	QPSK	1	0	Bottom Face	0mm	ON	41055	2636.5	SPEED	13.49	14.00	1.125	62.9	1.006	-0.18	0.739	0.836
	LTE Band 41_Ant Main	20M	QPSK	1	0	Bottom Face	0mm	ON	41490	2680	SPEED	13.45	14.00	1.135	62.9	1.006	0.1	0.580	0.662
	LTE Band 41_Ant Main	20M	QPSK	50	0	Bottom Face	0mm	ON	40620	2593	SPEED	12.64	13.00	1.086	62.9	1.006	0.12	0.779	0.851
	LTE Band 41_Ant Main	20M	QPSK	50	0	Bottom Face	0mm	ON	39750	2506	SPEED	12.52	13.00	1.117	62.9	1.006	-0.17	0.551	0.619
	LTE Band 41_Ant Main	20M	QPSK	50	0	Bottom Face	0mm	ON	40185	2549.5	SPEED	12.52	13.00	1.117	62.9	1.006	-0.03	0.716	0.804
	LTE Band 41_Ant Main	20M	QPSK	50	0	Bottom Face	0mm	ON	41055	2636.5	SPEED	12.50	13.00	1.122	62.9	1.006	0.14	0.654	0.738
	LTE Band 41_Ant Main	20M	QPSK	50	0	Bottom Face	0mm	ON	41490	2680	SPEED	12.49	13.00	1.125	62.9	1.006	0.11	0.504	0.570
	LTE Band 41_Ant Main	20M	QPSK	100	0	Bottom Face	0mm	ON	40620	2593	SPEED	12.56	13.00	1.107	62.9	1.006	-0.05	0.767	0.854
	LTE Band 41_Ant Main	20M	QPSK	1	0	Edge 1	0mm	ON	40620	2593	SPEED	13.53	14.00	1.114	62.9	1.006	0.18	0.263	0.295
	LTE Band 41_Ant Main	20M	QPSK	50	0	Edge 1	0mm	ON	40620	2593	SPEED	12.64	13.00	1.086	62.9	1.006	0.14	0.227	0.248
	LTE Band 41_Ant Main	20M	QPSK	1	0	Edge 2	0mm	ON	40620	2593	SPEED	13.53	14.00	1.114	62.9	1.006	-0.17	0.106	0.119
	LTE Band 41_Ant Main	20M	QPSK	50	0	Edge 2	0mm	ON	40620	2593	SPEED	12.64	13.00	1.086	62.9	1.006	0.17	0.092	0.101
	LTE Band 41_HPUE_Ant Main	20M	QPSK	1	0	Bottom Face	0mm	ON	40620	2593	SPEED	15.20	16.00	1.202	42.9	1.009	0	0.845	1.025
	LTE Band 41_HPUE_Ant Main	20M	QPSK	1	0	Bottom Face	0mm	ON	39750	2506	SPEED	15.07	16.00	1.239	42.9	1.009	0.01	0.627	0.784
	LTE Band 41_HPUE_Ant Main	20M	QPSK	1	0	Bottom Face	0mm	ON	40185	2549.5	SPEED	15.12	16.00	1.225	42.9	1.009	0.1	0.761	0.940
	LTE Band 41_HPUE_Ant Main	20M	QPSK	1	0	Bottom Face	0mm	ON	41055	2636.5	SPEED	15.19	16.00	1.205	42.9	1.009	-0.17	0.781	0.950
	LTE Band 41_HPUE_Ant Main	20M	QPSK	1	0	Bottom Face	0mm	ON	41490	2680	SPEED	14.97	16.00	1.268	42.9	1.009	0.04	0.546	0.698
	LTE Band 41_HPUE_Ant Main	20M	QPSK	1	0	Bottom Face	0mm	ON	40620	2593	SAA	15.20	16.00	1.202	62.9	1.006	-0.01	0.765	0.925
	LTE Band 41_HPUE_Ant Main	20M	QPSK	1	0	Bottom Face	0mm	ON	39750	2506	SAA	15.07	16.00	1.239	62.9	1.006	0.05	0.541	0.674
	LTE Band 41_HPUE_Ant Main	20M	QPSK	1	0	Bottom Face	0mm	ON	40185	2549.5	SAA	15.12	16.00	1.225	62.9	1.006	0.06	0.706	0.870
	LTE Band 41_HPUE_Ant Main	20M	QPSK	1	0	Bottom Face	0mm	ON	41055	2636.5	SAA	15.19	16.00	1.205	62.9	1.006	-0.09	0.545	0.661
	LTE Band 41_HPUE_Ant Main	20M	QPSK	1	0	Bottom Face	0mm	ON	41490	2680	SAA	14.97	16.00	1.268	62.9	1.006	-0.08	0.494	0.630
	LTE Band 41C_Ant Main	20M	QPSK	1	0	Bottom Face	0mm	ON	41490+41292	2680	SPEED	13.59	14.00	1.099	62.9	1.006	-0.03	0.619	0.684
	LTE Band 41C_Ant Main	20M	QPSK	1	0	Bottom Face	0mm	ON	39750+39948	2506	SPEED	13.18	14.00	1.208	62.9	1.006	0.14	0.527	0.640
	LTE Band 41C_Ant Main	20M	QPSK	1	0	Bottom Face	0mm	ON	40185+39987	2549.5	SPEED	13.39	14.00	1.151	62.9	1.006	0.11	0.705	0.816
	LTE Band 41C_Ant Main	20M	QPSK	1	0	Bottom Face	0mm	ON	40620+40422	2593	SPEED	13.42	14.00	1.143	62.9	1.006	-0.05	0.815	0.937
	LTE Band 41C_Ant Main	20M	QPSK	1	0	Bottom Face	0mm	ON	41055+40857	2636.5	SPEED	13.45	14.00	1.135	62.9	1.006	0.18	0.720	0.822
	LTE Band 41C_HPUE_Ant Main	20M	QPSK	1	0	Bottom Face	0mm	ON	40620+40422	2593	SPEED	14.59	16.00	1.384	42.9	1.009	-0.07	0.722	1.008
	LTE Band 41C_HPUE_Ant Main	20M	QPSK	1	0	Bottom Face	0mm	ON	39750+39948	2506	SPEED	14.26	16.00	1.493	42.9	1.009	0.01	0.434	0.654
	LTE Band 41C_HPUE_Ant Main	20M	QPSK	1	0	Bottom Face	0mm	ON	40185+39987	2549.5	SPEED	14.47	16.00	1.422	42.9	1.009	0.03	0.585	0.840
	LTE Band 41C_HPUE_Ant Main	20M	QPSK	1	0	Bottom Face	0mm	ON	41055+40857	2636.5	SPEED	14.58	16.00	1.387	42.9	1.009	-0.08	0.667	0.933
	LTE Band 41C_HPUE_Ant Main	20M	QPSK	1	0	Bottom Face	0mm	ON	41490+41292	2680	SPEED	14.55	16.00	1.396	42.9	1.009	-0.08	0.527	0.743
	LTE Band 41_Ant Main	20M	QPSK	1	0	Bottom of Laptop	25mm	OFF	40620	2593	SPEED	23.58	25.00	1.387	62.9	1.006	0.01	0.109	0.152
	LTE Band 41_Ant Main	20M	QPSK	50	0	Bottom of Laptop	25mm	OFF	40620	2593	SPEED	22.58	24.00	1.387	62.9	1.006	-0.01	0.087	0.121
	LTE Band 41_Ant Main	20M	QPSK	1	0	Bottom Face	25mm	OFF	40620	2593	SPEED	23.58	25.00	1.387	62.9	1.006	-0.09	0.163	0.227
	LTE Band 41_Ant Main	20M	QPSK	50	0	Bottom Face	25mm	OFF	40620	2593	SPEED	22.58	24.00	1.387	62.9	1.006	-0.17	0.129	0.180
	LTE Band 41_Ant Main	20M	QPSK	1	0	Edge 1	24mm	OFF	40620	2593	SPEED	23.58	25.00	1.387	62.9	1.006	-0.1	0.159	0.222
	LTE Band 41_Ant Main	20M	QPSK	50	0	Edge 1	24mm	OFF	40620	2593	SPEED	22.58	24.00	1.387	62.9	1.006	0.18	0.135	0.188
	LTE Band 41_Ant Main	20M	QPSK	1	0	Edge 2	12mm	OFF	40620	2593	SPEED	23.58	25.00	1.387	62.9	1.006	-0.17	0.077	0.107
	LTE Band 41_Ant Main	20M	QPSK	50	0	Edge 2	12mm	OFF	40620	2593	SPEED	22.58	24.00	1.387	62.9	1.006	-0.04	0.062	0.086



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Antenna Vendor	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41_Ant MIMO2	20M	QPSK	1	0	Bottom of Laptop	0mm	ON	40620	2593	SPEED	11.30	11.50	1.047	62.9	1.006	0.01	0.082	0.086
	LTE Band 41_Ant MIMO2	20M	QPSK	50	0	Bottom of Laptop	0mm	ON	40620	2593	SPEED	11.03	11.50	1.114	62.9	1.006	0.1	0.076	0.085
	LTE Band 41_Ant MIMO2	20M	QPSK	1	0	Bottom Face	0mm	ON	40620	2593	SPEED	11.30	11.50	1.047	62.9	1.006	0.01	0.899	0.947
	LTE Band 41_Ant MIMO2	20M	QPSK	1	0	Bottom Face	0mm	ON	39750	2506	SPEED	11.07	11.50	1.104	62.9	1.006	0.16	0.849	0.943
	LTE Band 41_Ant MIMO2	20M	QPSK	1	0	Bottom Face	0mm	ON	40185	2549.5	SPEED	11.17	11.50	1.079	62.9	1.006	-0.08	0.868	0.942
	LTE Band 41_Ant MIMO2	20M	QPSK	1	0	Bottom Face	0mm	ON	41055	2636.5	SPEED	11.25	11.50	1.059	62.9	1.006	0.05	0.875	0.932
	LTE Band 41_Ant MIMO2	20M	QPSK	1	0	Bottom Face	0mm	ON	41490	2680	SPEED	11.12	11.50	1.091	62.9	1.006	0.06	0.875	0.961
	LTE Band 41_Ant MIMO2	20M	QPSK	50	0	Bottom Face	0mm	ON	40620	2593	SPEED	11.03	11.50	1.114	62.9	1.006	-0.09	0.850	0.953
	LTE Band 41_Ant MIMO2	20M	QPSK	50	0	Bottom Face	0mm	ON	39750	2506	SPEED	10.93	11.50	1.140	62.9	1.006	0.13	0.837	0.960
	LTE Band 41_Ant MIMO2	20M	QPSK	50	0	Bottom Face	0mm	ON	40185	2549.5	SPEED	10.92	11.50	1.143	62.9	1.006	0.12	0.811	0.932
	LTE Band 41_Ant MIMO2	20M	QPSK	50	0	Bottom Face	0mm	ON	41055	2636.5	SPEED	11.10	11.50	1.096	62.9	1.006	0.03	0.817	0.901
	LTE Band 41_Ant MIMO2	20M	QPSK	50	0	Bottom Face	0mm	ON	41490	2680	SPEED	10.97	11.50	1.130	62.9	1.006	0.18	0.817	0.929
	LTE Band 41_Ant MIMO2	20M	QPSK	100	0	Bottom Face	0mm	ON	40620	2593	SPEED	11.01	11.50	1.119	62.9	1.006	0.16	0.858	0.966
	LTE Band 41_Ant MIMO2	20M	QPSK	1	0	Edge 1	0mm	ON	40620	2593	SPEED	11.30	11.50	1.047	62.9	1.006	-0.1	0.008	0.008
	LTE Band 41_Ant MIMO2	20M	QPSK	50	0	Edge 1	0mm	ON	40620	2593	SPEED	11.03	11.50	1.114	62.9	1.006	0.07	0.008	0.009
	LTE Band 41_Ant MIMO2	20M	QPSK	1	0	Edge 4	0mm	ON	40620	2593	SPEED	11.30	11.50	1.047	62.9	1.006	0.18	0.944	0.994
	LTE Band 41_Ant MIMO2	20M	QPSK	1	0	Edge 4	0mm	ON	39750	2506	SPEED	11.07	11.50	1.104	62.9	1.006	0.01	0.855	0.950
	LTE Band 41_Ant MIMO2	20M	QPSK	1	0	Edge 4	0mm	ON	40185	2549.5	SPEED	11.17	11.50	1.079	62.9	1.006	-0.15	0.813	0.882
	LTE Band 41_Ant MIMO2	20M	QPSK	1	0	Edge 4	0mm	ON	41055	2636.5	SPEED	11.25	11.50	1.059	62.9	1.006	0.19	0.930	0.991
11	LTE Band 41_Ant MIMO2	20M	QPSK	1	0	Edge 4	0mm	ON	41490	2680	SPEED	11.12	11.50	1.091	62.9	1.006	-0.01	1.020	1.120
	LTE Band 41_Ant MIMO2	20M	QPSK	50	0	Edge 4	0mm	ON	40620	2593	SPEED	11.03	11.50	1.114	62.9	1.006	0.07	0.882	0.989
	LTE Band 41_Ant MIMO2	20M	QPSK	50	0	Edge 4	0mm	ON	39750	2506	SPEED	10.93	11.50	1.140	62.9	1.006	0.03	0.868	0.996
	LTE Band 41_Ant MIMO2	20M	QPSK	50	0	Edge 4	0mm	ON	40185	2549.5	SPEED	10.92	11.50	1.143	62.9	1.006	-0.15	0.842	0.968
	LTE Band 41_Ant MIMO2	20M	QPSK	50	0	Edge 4	0mm	ON	41055	2636.5	SPEED	11.10	11.50	1.096	62.9	1.006	-0.15	0.848	0.935
	LTE Band 41_Ant MIMO2	20M	QPSK	50	0	Edge 4	0mm	ON	41490	2680	SPEED	10.97	11.50	1.130	62.9	1.006	0.11	0.848	0.964
	LTE Band 41_Ant MIMO2	20M	QPSK	100	0	Edge 4	0mm	ON	40620	2593	SPEED	11.01	11.50	1.119	62.9	1.006	-0.08	0.890	1.002
	LTE Band 41_Ant MIMO2	20M	QPSK	1	0	Edge 4	0mm	ON	41490	2680	SAA	11.12	11.50	1.091	62.9	1.006	-0.17	0.895	0.982
	LTE Band 41_Ant MIMO2	20M	QPSK	1	0	Edge 4	0mm	ON	40620	2593	SAA	11.30	11.50	1.047	62.9	1.006	-0.08	0.829	0.873
	LTE Band 41_Ant MIMO2	20M	QPSK	1	0	Edge 4	0mm	ON	39750	2506	SAA	11.07	11.50	1.104	62.9	1.006	-0.08	0.750	0.833
	LTE Band 41_Ant MIMO2	20M	QPSK	1	0	Edge 4	0mm	ON	40185	2549.5	SAA	11.17	11.50	1.079	62.9	1.006	0.17	0.713	0.774
	LTE Band 41_Ant MIMO2	20M	QPSK	1	0	Edge 4	0mm	ON	41055	2636.5	SAA	11.25	11.50	1.059	62.9	1.006	0.18	0.816	0.870
	LTE Band 41_Ant MIMO2	20M	QPSK	1	0	Bottom of Laptop	17mm	OFF	40620	2593	SPEED	23.26	24.00	1.186	62.9	1.006	0.17	0.189	0.225
	LTE Band 41_Ant MIMO2	20M	QPSK	50	0	Bottom of Laptop	17mm	OFF	40620	2593	SPEED	22.20	23.00	1.202	62.9	1.006	0.18	0.151	0.183
	LTE Band 41_Ant MIMO2	20M	QPSK	1	0	Bottom Face	19mm	OFF	40620	2593	SPEED	23.26	24.00	1.186	62.9	1.006	-0.13	0.338	0.403
	LTE Band 41_Ant MIMO2	20M	QPSK	50	0	Bottom Face	19mm	OFF	40620	2593	SPEED	22.20	23.00	1.202	62.9	1.006	-0.13	0.270	0.327
	LTE Band 41_Ant MIMO2	20M	QPSK	1	0	Edge 1	22mm	OFF	40620	2593	SPEED	23.26	24.00	1.186	62.9	1.006	0.06	0.040	0.048
	LTE Band 41_Ant MIMO2	20M	QPSK	50	0	Edge 1	22mm	OFF	40620	2593	SPEED	22.20	23.00	1.202	62.9	1.006	-0.03	0.032	0.039
	LTE Band 41_Ant MIMO2	20M	QPSK	1	0	Edge 4	22mm	OFF	40620	2593	SPEED	23.26	24.00	1.186	62.9	1.006	-0.03	0.327	0.390
	LTE Band 41_Ant MIMO2	20M	QPSK	50	0	Edge 4	22mm	OFF	40620	2593	SPEED	22.20	23.00	1.202	62.9	1.006	0.08	0.261	0.316



FCC SAR TEST REPORT

Report No. : FA301305

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Antenna Vendor	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 42_Ant Main	20M	QPSK	1	0	Bottom of Laptop	0mm	ON	42190	3460	SPEED	11.15	12.50	1.365	62.9	1.006	-0.07	0.121	0.166
	LTE Band 42_Ant Main	20M	QPSK	50	0	Bottom of Laptop	0mm	ON	42190	3460	SPEED	10.96	12.50	1.426	62.9	1.006	0.05	0.116	0.166
	LTE Band 42_Ant Main	20M	QPSK	1	0	Bottom Face	0mm	ON	42190	3460	SPEED	11.15	12.50	1.365	62.9	1.006	-0.11	0.540	0.741
	LTE Band 42_Ant Main	20M	QPSK	1	0	Bottom Face	0mm	ON	42590	3500	SPEED	11.07	12.50	1.390	62.9	1.006	-0.12	0.673	0.941
	LTE Band 42_Ant Main	20M	QPSK	1	0	Bottom Face	0mm	ON	42990	3540	SPEED	10.98	12.50	1.419	62.9	1.006	0	0.788	1.125
	LTE Band 42_Ant Main	20M	QPSK	50	0	Bottom Face	0mm	ON	42190	3460	SPEED	10.96	12.50	1.426	62.9	1.006	0.03	0.502	0.720
	LTE Band 42_Ant Main	20M	QPSK	50	0	Bottom Face	0mm	ON	42590	3500	SPEED	10.91	12.50	1.442	62.9	1.006	-0.16	0.530	0.769
	LTE Band 42_Ant Main	20M	QPSK	50	0	Bottom Face	0mm	ON	42990	3540	SPEED	10.61	12.50	1.545	62.9	1.006	-0.02	0.714	1.110
	LTE Band 42_Ant Main	20M	QPSK	100	0	Bottom Face	0mm	ON	42190	3460	SPEED	10.87	12.50	1.455	62.9	1.006	0.03	0.533	0.780
	LTE Band 42_Ant Main	20M	QPSK	1	0	Edge 1	0mm	ON	42190	3460	SPEED	11.15	12.50	1.365	62.9	1.006	0.15	0.103	0.141
	LTE Band 42_Ant Main	20M	QPSK	50	0	Edge 1	0mm	ON	42190	3460	SPEED	10.96	12.50	1.426	62.9	1.006	-0.09	0.099	0.142
	LTE Band 42_Ant Main	20M	QPSK	1	0	Edge 2	0mm	ON	42190	3460	SPEED	11.15	12.50	1.365	62.9	1.006	0.11	0.092	0.126
	LTE Band 42_Ant Main	20M	QPSK	50	0	Edge 2	0mm	ON	42190	3460	SPEED	10.96	12.50	1.426	62.9	1.006	-0.05	0.089	0.128
	LTE Band 42_Ant Main	20M	QPSK	1	0	Bottom Face	0mm	ON	42990	3540	SAA	10.98	12.50	1.419	62.9	1.006	-0.08	0.585	0.835
	LTE Band 42_Ant Main	20M	QPSK	1	0	Bottom Face	0mm	ON	42190	3460	SAA	11.15	12.50	1.365	62.9	1.006	-0.01	0.401	0.550
	LTE Band 42_Ant Main	20M	QPSK	1	0	Bottom Face	0mm	ON	42590	3500	SAA	11.07	12.50	1.390	62.9	1.006	-0.08	0.500	0.699
	LTE Band 42_Ant Main	20M	QPSK	1	0	Bottom of Laptop	25mm	OFF	42190	3460	SPEED	20.41	22.00	1.442	62.9	1.006	0.16	0.066	0.096
	LTE Band 42_Ant Main	20M	QPSK	50	0	Bottom of Laptop	25mm	OFF	42190	3460	SPEED	19.39	21.00	1.449	62.9	1.006	0.05	0.056	0.082
	LTE Band 42_Ant Main	20M	QPSK	1	0	Bottom Face	25mm	OFF	42190	3460	SPEED	20.41	22.00	1.442	62.9	1.006	-0.15	0.121	0.176
	LTE Band 42_Ant Main	20M	QPSK	50	0	Bottom Face	25mm	OFF	42190	3460	SPEED	19.39	21.00	1.449	62.9	1.006	0.02	0.106	0.154
	LTE Band 42_Ant Main	20M	QPSK	1	0	Edge 1	24mm	OFF	42190	3460	SPEED	20.41	22.00	1.442	62.9	1.006	0.07	0.116	0.168
	LTE Band 42_Ant Main	20M	QPSK	50	0	Edge 1	24mm	OFF	42190	3460	SPEED	19.39	21.00	1.449	62.9	1.006	0.16	0.087	0.127
	LTE Band 42_Ant Main	20M	QPSK	1	0	Edge 2	12mm	OFF	42190	3460	SPEED	20.41	22.00	1.442	62.9	1.006	0.13	0.064	0.093
	LTE Band 42_Ant Main	20M	QPSK	50	0	Edge 2	12mm	OFF	42190	3460	SPEED	19.39	21.00	1.449	62.9	1.006	-0.18	0.053	0.077
	LTE Band 42_Ant MIMO2	20M	QPSK	1	0	Bottom of Laptop	0mm	ON	42190	3460	SPEED	9.85	11.00	1.303	62.9	1.006	0.1	0.062	0.081
	LTE Band 42_Ant MIMO2	20M	QPSK	50	0	Bottom of Laptop	0mm	ON	42190	3460	SPEED	8.73	10.00	1.340	62.9	1.006	0.05	0.058	0.078
	LTE Band 42_Ant MIMO2	20M	QPSK	1	0	Bottom Face	0mm	ON	42190	3460	SPEED	9.85	11.00	1.303	62.9	1.006	-0.14	0.650	0.852
	LTE Band 42_Ant MIMO2	20M	QPSK	1	0	Bottom Face	0mm	ON	42590	3500	SPEED	9.63	11.00	1.371	62.9	1.006	0.18	0.658	0.907
	LTE Band 42_Ant MIMO2	20M	QPSK	1	0	Bottom Face	0mm	ON	42990	3540	SPEED	9.67	11.00	1.358	62.9	1.006	-0.03	0.610	0.834
	LTE Band 42_Ant MIMO2	20M	QPSK	50	0	Bottom Face	0mm	ON	42190	3460	SPEED	8.73	10.00	1.340	62.9	1.006	0	0.632	0.852
	LTE Band 42_Ant MIMO2	20M	QPSK	50	0	Bottom Face	0mm	ON	42590	3500	SPEED	8.65	10.00	1.365	62.9	1.006	0.16	0.641	0.880
	LTE Band 42_Ant MIMO2	20M	QPSK	50	0	Bottom Face	0mm	ON	42990	3540	SPEED	8.45	10.00	1.429	62.9	1.006	0.12	0.602	0.865
	LTE Band 42_Ant MIMO2	20M	QPSK	100	0	Bottom Face	0mm	ON	42190	3460	SPEED	8.66	10.00	1.361	62.9	1.006	0.04	0.612	0.838
	LTE Band 42_Ant MIMO2	20M	QPSK	1	0	Edge 1	0mm	ON	42190	3460	SPEED	9.85	11.00	1.303	62.9	1.006	-0.17	0.032	0.042
	LTE Band 42_Ant MIMO2	20M	QPSK	50	0	Edge 1	0mm	ON	42190	3460	SPEED	8.73	10.00	1.340	62.9	1.006	-0.09	0.028	0.038
12	LTE Band 42_Ant MIMO2	20M	QPSK	1	0	Edge 4	0mm	ON	42190	3460	SPEED	9.85	11.00	1.303	62.9	1.006	-0.09	0.911	1.194
	LTE Band 42_Ant MIMO2	20M	QPSK	1	0	Edge 4	0mm	ON	42590	3500	SPEED	9.63	11.00	1.371	62.9	1.006	-0.02	0.768	1.059
	LTE Band 42_Ant MIMO2	20M	QPSK	1	0	Edge 4	0mm	ON	42990	3540	SPEED	9.67	11.00	1.358	62.9	1.006	0.16	0.715	0.977
	LTE Band 42_Ant MIMO2	20M	QPSK	50	0	Edge 4	0mm	ON	42190	3460	SPEED	8.73	10.00	1.340	62.9	1.006	0.09	0.788	1.062
	LTE Band 42_Ant MIMO2	20M	QPSK	50	0	Edge 4	0mm	ON	42590	3500	SPEED	8.65	10.00	1.365	62.9	1.006	-0.04	0.752	1.032
	LTE Band 42_Ant MIMO2	20M	QPSK	50	0	Edge 4	0mm	ON	42990	3540	SPEED	8.45	10.00	1.429	62.9	1.006	-0.12	0.701	1.008
	LTE Band 42_Ant MIMO2	20M	QPSK	100	0	Edge 4	0mm	ON	42190	3460	SPEED	8.66	10.00	1.361	62.9	1.006	0.06	0.763	1.045
	LTE Band 42_Ant MIMO2	20M	QPSK	1	0	Edge 4	0mm	ON	42190	3460	SAA	9.85	11.00	1.303	62.9	1.006	0.17	0.775	1.016
	LTE Band 42_Ant MIMO2	20M	QPSK	1	0	Edge 4	0mm	ON	42590	3500	SAA	9.63	11.00	1.371	62.9	1.006	-0.18	0.653	0.901
	LTE Band 42_Ant MIMO2	20M	QPSK	1	0	Edge 4	0mm	ON	42990	3540	SAA	9.67	11.00	1.358	62.9	1.006	-0.07	0.608	0.831
	LTE Band 42C_Ant MIMO2	20M	QPSK	1	0	Edge 4	0mm	ON	42392+42590	3480.2	SPEED	10.16	11.00	1.213	62.9	1.006	0.12	0.886	1.082
	LTE Band 42C_Ant MIMO2	20M	QPSK	1	0	Edge 4	0mm	ON	42190+42388	3460	SPEED	10.05	11.00	1.245	62.9	1.006	-0.01	0.941	1.178
	LTE Band 42C_Ant MIMO2	20M	QPSK	1	0	Edge 4	0mm	ON	42792+42990	3520.2	SPEED	9.92	11.00	1.282	62.9	1.006	-0.17	0.824	1.063
	LTE Band 42_Ant MIMO2	20M	QPSK	1	0	Bottom of Laptop	17mm	OFF	42190	3460	SPEED	20.47	22.00	1.422	62.9	1.006	-0.03	0.079	0.113
	LTE Band 42_Ant MIMO2	20M	QPSK	50	0	Bottom of Laptop	17mm	OFF	42190	3460	SPEED	19.52	21.00	1.406	62.9	1.006	0.07	0.062	0.088
	LTE Band 42_Ant MIMO2	20M	QPSK	1	0	Bottom Face	19mm	OFF	42190	3460	SPEED	20.47	22.00	1.422	62.9	1.006	-0.01	0.220	0.315
	LTE Band 42_Ant MIMO2	20M	QPSK	50	0	Bottom Face	19mm	OFF	42190	3460	SPEED	19.52	21.00	1.406	62.9	1.006	-0.06	0.174	0.246
	LTE Band 42_Ant MIMO2	20M	QPSK	1	0	Edge 1	22mm	OFF	42190	3460	SPEED	20.47	22.00	1.422	62.9	1.006	-0.04	0.001	0.001
	LTE Band 42_Ant MIMO2	20M	QPSK	50	0	Edge 1	22mm	OFF	42190	3460	SPEED	19.52	21.00	1.406	62.9	1.006	-0.09	0.001	0.001
	LTE Band 42_Ant MIMO2	20M	QPSK	1	0	Edge 4	22mm	OFF	42190	3460	SPEED	20.47	22.00	1.422	62.9	1.006	-0.17	0.333	0.476
	LTE Band 42_Ant MIMO2	20M	QPSK	50	0	Edge 4	22mm	OFF	42190	3460	SPEED	19.52	21.00	1.406	62.9	1.006	-0.1	0.263	0.372



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Antenna Vendor	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 43_Ant MIMO2	20M	QPSK	1	0	Bottom of Laptop	0mm	ON	45090	3750	SPEED	9.58	11.00	1.387	62.9	1.006	-0.08	0.073	0.102
	LTE Band 43_Ant MIMO2	20M	QPSK	50	0	Bottom of Laptop	0mm	ON	45090	3750	SPEED	8.63	10.00	1.371	62.9	1.006	-0.13	0.065	0.090
	LTE Band 43_Ant MIMO2	20M	QPSK	1	0	Bottom Face	0mm	ON	45090	3750	SPEED	9.58	11.00	1.387	62.9	1.006	0	0.530	0.739
	LTE Band 43_Ant MIMO2	20M	QPSK	50	0	Bottom Face	0mm	ON	45090	3750	SPEED	8.63	10.00	1.371	62.9	1.006	-0.1	0.510	0.703
	LTE Band 43_Ant MIMO2	20M	QPSK	1	0	Edge 1	0mm	ON	45090	3750	SPEED	9.58	11.00	1.387	62.9	1.006	-0.15	0.026	0.036
	LTE Band 43_Ant MIMO2	20M	QPSK	50	0	Edge 1	0mm	ON	45090	3750	SPEED	8.63	10.00	1.371	62.9	1.006	0.08	0.018	0.025
	LTE Band 43_Ant MIMO2	20M	QPSK	1	0	Edge 4	0mm	ON	45090	3750	SPEED	9.58	11.00	1.387	62.9	1.006	-0.1	0.585	0.816
	LTE Band 43_Ant MIMO2	20M	QPSK	1	0	Edge 4	0mm	ON	44690	3710	SPEED	9.55	11.00	1.396	62.9	1.006	-0.11	0.590	0.829
13	LTE Band 43_Ant MIMO2	20M	QPSK	1	0	Edge 4	0mm	ON	45490	3790	SPEED	9.43	11.00	1.435	62.9	1.006	0.08	0.780	1.126
	LTE Band 43_Ant MIMO2	20M	QPSK	50	0	Edge 4	0mm	ON	45090	3750	SPEED	8.63	10.00	1.371	62.9	1.006	0.09	0.505	0.696
	LTE Band 43_Ant MIMO2	20M	QPSK	100	0	Edge 4	0mm	ON	45090	3750	SPEED	8.54	10.00	1.400	62.9	1.006	0.09	0.487	0.686
	LTE Band 43_Ant MIMO2	20M	QPSK	1	0	Edge 4	0mm	ON	45490	3790	SAA	9.43	11.00	1.435	62.9	1.006	-0.18	0.626	0.904
	LTE Band 43_Ant MIMO2	20M	QPSK	1	0	Edge 4	0mm	ON	44690	3710	SAA	9.55	11.00	1.396	62.9	1.006	0.08	0.474	0.666
	LTE Band 43_Ant MIMO2	20M	QPSK	1	0	Edge 4	0mm	ON	45090	3750	SAA	9.58	11.00	1.387	62.9	1.006	0.01	0.469	0.654
	LTE Band 43C_Ant MIMO2	20M	QPSK	1	0	Edge 4	0mm	ON	45090+44892	3750	SPEED	10.18	11.00	1.208	62.9	1.006	0.18	0.846	1.028
	LTE Band 43C_Ant MIMO2	20M	QPSK	1	0	Edge 4	0mm	ON	44690+44888	3710	SPEED	9.57	11.00	1.390	62.9	1.006	0.14	0.683	0.955
	LTE Band 43C_Ant MIMO2	20M	QPSK	1	0	Edge 4	0mm	ON	45490+45292	3790	SPEED	10.03	11.00	1.250	62.9	1.006	-0.17	0.840	1.057
	LTE Band 43_Ant MIMO2	20M	QPSK	1	0	Bottom of Laptop	17mm	OFF	45090	3750	SPEED	20.39	22.00	1.449	62.9	1.006	0.03	0.110	0.160
	LTE Band 43_Ant MIMO2	20M	QPSK	50	0	Bottom of Laptop	17mm	OFF	45090	3750	SPEED	19.47	21.00	1.422	62.9	1.006	-0.08	0.090	0.129
	LTE Band 43_Ant MIMO2	20M	QPSK	1	0	Bottom Face	19mm	OFF	45090	3750	SPEED	20.39	22.00	1.449	62.9	1.006	-0.18	0.292	0.426
	LTE Band 43_Ant MIMO2	20M	QPSK	50	0	Bottom Face	19mm	OFF	45090	3750	SPEED	19.47	21.00	1.422	62.9	1.006	0.1	0.178	0.255
	LTE Band 43_Ant MIMO2	20M	QPSK	1	0	Edge 1	22mm	OFF	45090	3750	SPEED	20.39	22.00	1.449	62.9	1.006	0.12	0.001	0.001
	LTE Band 43_Ant MIMO2	20M	QPSK	50	0	Edge 1	22mm	OFF	45090	3750	SPEED	19.47	21.00	1.422	62.9	1.006	0.08	0.001	0.001
	LTE Band 43_Ant MIMO2	20M	QPSK	1	0	Edge 4	22mm	OFF	45090	3750	SPEED	20.39	22.00	1.449	62.9	1.006	-0.17	0.404	0.589
	LTE Band 43_Ant MIMO2	20M	QPSK	50	0	Edge 4	22mm	OFF	45090	3750	SPEED	19.47	21.00	1.422	62.9	1.006	-0.03	0.335	0.479



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Antenna Vendor	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 48_Ant Main	20M	QPSK	1	0	Bottom of Laptop	0mm	ON	56150	3641	SPEED	11.05	12.50	1.396	62.9	1.006	0.08	0.094	0.132
	LTE Band 48_Ant Main	20M	QPSK	50	0	Bottom of Laptop	0mm	ON	56150	3641	SPEED	11.00	12.50	1.413	62.9	1.006	0.01	0.088	0.125
	LTE Band 48_Ant Main	20M	QPSK	1	0	Bottom Face	0mm	ON	56150	3641	SPEED	11.05	12.50	1.396	62.9	1.006	-0.08	0.690	0.969
	LTE Band 48_Ant Main	20M	QPSK	1	0	Bottom Face	0mm	ON	55340	3560	SPEED	11.03	12.50	1.403	62.9	1.006	-0.08	0.763	1.077
	LTE Band 48_Ant Main	20M	QPSK	1	0	Bottom Face	0mm	ON	55830	3609	SPEED	11.01	12.50	1.409	62.9	1.006	0.1	0.736	1.043
	LTE Band 48_Ant Main	20M	QPSK	1	0	Bottom Face	0mm	ON	56640	3690	SPEED	10.95	12.50	1.429	62.9	1.006	-0.18	0.716	1.029
	LTE Band 48_Ant Main	20M	QPSK	50	0	Bottom Face	0mm	ON	56150	3641	SPEED	11.00	12.50	1.413	62.9	1.006	0.1	0.672	0.955
	LTE Band 48_Ant Main	20M	QPSK	50	0	Bottom Face	0mm	ON	55340	3560	SPEED	10.92	12.50	1.439	62.9	1.006	-0.17	0.733	1.061
	LTE Band 48_Ant Main	20M	QPSK	50	0	Bottom Face	0mm	ON	55830	3609	SPEED	10.96	12.50	1.426	62.9	1.006	-0.08	0.707	1.014
	LTE Band 48_Ant Main	20M	QPSK	50	0	Bottom Face	0mm	ON	56640	3690	SPEED	10.99	12.50	1.416	62.9	1.006	-0.04	0.697	0.993
	LTE Band 48_Ant Main	20M	QPSK	100	0	Bottom Face	0mm	ON	56640	3690	SPEED	10.92	12.50	1.439	62.9	1.006	-0.08	0.678	0.981
	LTE Band 48_Ant Main	20M	QPSK	1	0	Edge 1	0mm	ON	56150	3641	SPEED	11.05	12.50	1.396	62.9	1.006	-0.03	0.115	0.162
	LTE Band 48_Ant Main	20M	QPSK	50	0	Edge 1	0mm	ON	56150	3641	SPEED	11.00	12.50	1.413	62.9	1.006	0.14	0.108	0.153
	LTE Band 48_Ant Main	20M	QPSK	1	0	Edge 2	0mm	ON	56150	3641	SPEED	11.05	12.50	1.396	62.9	1.006	0.11	0.177	0.249
	LTE Band 48_Ant Main	20M	QPSK	50	0	Edge 2	0mm	ON	56150	3641	SPEED	11.00	12.50	1.413	62.9	1.006	-0.05	0.162	0.230
	LTE Band 48_Ant Main	20M	QPSK	1	0	Bottom Face	0mm	ON	55340	3560	SAA	11.03	12.50	1.403	62.9	1.006	0.18	0.681	0.961
	LTE Band 48_Ant Main	20M	QPSK	1	0	Bottom Face	0mm	ON	55830	3609	SAA	11.01	12.50	1.409	62.9	1.006	0.18	0.569	0.807
	LTE Band 48_Ant Main	20M	QPSK	1	0	Bottom Face	0mm	ON	56150	3641	SAA	11.05	12.50	1.396	62.9	1.006	0.16	0.536	0.753
	LTE Band 48_Ant Main	20M	QPSK	1	0	Bottom Face	0mm	ON	56640	3690	SAA	10.95	12.50	1.429	62.9	1.006	-0.1	0.506	0.727
	LTE Band 48_Ant Main	20M	QPSK	1	0	Bottom of Laptop	25mm	OFF	56150	3641	SPEED	20.48	22.00	1.419	62.9	1.006	0.07	0.056	0.080
	LTE Band 48_Ant Main	20M	QPSK	50	0	Bottom of Laptop	25mm	OFF	56150	3641	SPEED	19.49	21.00	1.416	62.9	1.006	0.18	0.055	0.078
	LTE Band 48_Ant Main	20M	QPSK	1	0	Bottom Face	25mm	OFF	56150	3641	SPEED	20.48	22.00	1.419	62.9	1.006	-0.15	0.136	0.194
	LTE Band 48_Ant Main	20M	QPSK	50	0	Bottom Face	25mm	OFF	56150	3641	SPEED	19.49	21.00	1.416	62.9	1.006	0.19	0.105	0.150
	LTE Band 48_Ant Main	20M	QPSK	1	0	Edge 1	24mm	OFF	56150	3641	SPEED	20.48	22.00	1.419	62.9	1.006	0.07	0.152	0.217
	LTE Band 48_Ant Main	20M	QPSK	50	0	Edge 1	24mm	OFF	56150	3641	SPEED	19.49	21.00	1.416	62.9	1.006	-0.18	0.106	0.151
	LTE Band 48_Ant Main	20M	QPSK	1	0	Edge 2	12mm	OFF	56150	3641	SPEED	20.48	22.00	1.419	62.9	1.006	0.03	0.096	0.137
	LTE Band 48_Ant Main	20M	QPSK	50	0	Edge 2	12mm	OFF	56150	3641	SPEED	19.49	21.00	1.416	62.9	1.006	-0.15	0.086	0.122



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Antenna Vendor	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 48_Ant MIMO2	20M	QPSK	1	0	Bottom of Laptop	0mm	ON	56150	3641	SPEED	10.09	11.50	1.384	62.9	1.006	0.16	0.069	0.096
	LTE Band 48_Ant MIMO2	20M	QPSK	50	0	Bottom of Laptop	0mm	ON	56150	3641	SPEED	9.14	10.50	1.368	62.9	1.006	0.01	0.058	0.080
	LTE Band 48_Ant MIMO2	20M	QPSK	1	0	Bottom Face	0mm	ON	56150	3641	SPEED	10.09	11.50	1.384	62.9	1.006	-0.01	0.674	0.938
	LTE Band 48_Ant MIMO2	20M	QPSK	1	0	Bottom Face	0mm	ON	55340	3560	SPEED	10.03	11.50	1.403	62.9	1.006	-0.02	0.578	0.816
	LTE Band 48_Ant MIMO2	20M	QPSK	1	0	Bottom Face	0mm	ON	55830	3609	SPEED	10.05	11.50	1.396	62.9	1.006	0.1	0.624	0.877
	LTE Band 48_Ant MIMO2	20M	QPSK	1	0	Bottom Face	0mm	ON	56640	3690	SPEED	10.03	11.50	1.403	62.9	1.006	0.16	0.618	0.872
	LTE Band 48_Ant MIMO2	20M	QPSK	50	0	Bottom Face	0mm	ON	56150	3641	SPEED	9.14	10.50	1.368	62.9	1.006	-0.08	0.625	0.860
	LTE Band 48_Ant MIMO2	20M	QPSK	50	0	Bottom Face	0mm	ON	55340	3560	SPEED	9.11	10.50	1.377	62.9	1.006	-0.16	0.561	0.777
	LTE Band 48_Ant MIMO2	20M	QPSK	50	0	Bottom Face	0mm	ON	55830	3609	SPEED	9.03	10.50	1.403	62.9	1.006	0.07	0.604	0.852
	LTE Band 48_Ant MIMO2	20M	QPSK	50	0	Bottom Face	0mm	ON	56640	3690	SPEED	9.02	10.50	1.406	62.9	1.006	0.05	0.611	0.864
	LTE Band 48_Ant MIMO2	20M	QPSK	100	0	Bottom Face	0mm	ON	56150	3641	SPEED	9.08	10.50	1.387	62.9	1.006	-0.09	0.609	0.850
	LTE Band 48_Ant MIMO2	20M	QPSK	1	0	Edge 1	0mm	ON	56150	3641	SPEED	10.09	11.50	1.384	62.9	1.006	0.06	0.018	0.025
	LTE Band 48_Ant MIMO2	20M	QPSK	50	0	Edge 1	0mm	ON	56150	3641	SPEED	9.14	10.50	1.368	62.9	1.006	-0.07	0.015	0.021
	LTE Band 48_Ant MIMO2	20M	QPSK	1	0	Edge 4	0mm	ON	56150	3641	SPEED	10.09	11.50	1.384	62.9	1.006	-0.06	0.723	1.006
	LTE Band 48_Ant MIMO2	20M	QPSK	1	0	Edge 4	0mm	ON	55340	3560	SPEED	10.03	11.50	1.403	62.9	1.006	-0.08	0.620	0.875
	LTE Band 48_Ant MIMO2	20M	QPSK	1	0	Edge 4	0mm	ON	55830	3609	SPEED	10.05	11.50	1.396	62.9	1.006	0.13	0.669	0.940
	LTE Band 48_Ant MIMO2	20M	QPSK	1	0	Edge 4	0mm	ON	56640	3690	SPEED	10.03	11.50	1.403	62.9	1.006	0.12	0.663	0.936
	LTE Band 48_Ant MIMO2	20M	QPSK	50	0	Edge 4	0mm	ON	56150	3641	SPEED	9.14	10.50	1.368	62.9	1.006	0.06	0.681	0.937
	LTE Band 48_Ant MIMO2	20M	QPSK	50	0	Edge 4	0mm	ON	55340	3560	SPEED	9.11	10.50	1.377	62.9	1.006	0.03	0.611	0.847
	LTE Band 48_Ant MIMO2	20M	QPSK	50	0	Edge 4	0mm	ON	55830	3609	SPEED	9.03	10.50	1.403	62.9	1.006	0.18	0.658	0.929
	LTE Band 48_Ant MIMO2	20M	QPSK	50	0	Edge 4	0mm	ON	56640	3690	SPEED	9.02	10.50	1.406	62.9	1.006	0.16	0.666	0.942
	LTE Band 48_Ant MIMO2	20M	QPSK	100	0	Edge 4	0mm	ON	56150	3641	SPEED	9.08	10.50	1.387	62.9	1.006	-0.1	0.656	0.915
14	LTE Band 48_Ant MIMO2	20M	QPSK	1	0	Edge 4	0mm	ON	56150	3641	SAA	10.09	11.50	1.384	62.9	1.006	0.17	0.824	1.147
	LTE Band 48_Ant MIMO2	20M	QPSK	1	0	Edge 4	0mm	ON	55340	3560	SAA	10.03	11.50	1.403	62.9	1.006	0.07	0.739	1.043
	LTE Band 48_Ant MIMO2	20M	QPSK	1	0	Edge 4	0mm	ON	55830	3609	SAA	10.05	11.50	1.396	62.9	1.006	0.18	0.796	1.118
	LTE Band 48_Ant MIMO2	20M	QPSK	1	0	Edge 4	0mm	ON	56640	3690	SAA	10.03	11.50	1.403	62.9	1.006	-0.1	0.806	1.137
	LTE Band 48C_Ant MIMO2	20M	QPSK	1	0	Edge 4	0mm	ON	55340+55538	3560	SAA	10.34	11.50	1.306	62.9	1.006	0.12	0.850	1.117
	LTE Band 48C_Ant MIMO2	20M	QPSK	1	0	Edge 4	0mm	ON	55632+55830	3589.2	SAA	10.33	11.50	1.309	62.9	1.006	0.1	0.813	1.071
	LTE Band 48C_Ant MIMO2	20M	QPSK	1	0	Edge 4	0mm	ON	55952+56150	3621.2	SAA	10.28	11.50	1.324	62.9	1.006	-0.17	0.771	1.027
	LTE Band 48C_Ant MIMO2	20M	QPSK	1	0	Edge 4	0mm	ON	56442+56640	3690.2	SAA	10.29	11.50	1.321	62.9	1.006	0.04	0.719	0.956
	LTE Band 48_Ant MIMO2	20M	QPSK	1	0	Bottom of Laptop	17mm	OFF	56150	3641	SPEED	20.39	22.00	1.449	62.9	1.006	0.01	0.100	0.146
	LTE Band 48_Ant MIMO2	20M	QPSK	50	0	Bottom of Laptop	17mm	OFF	56150	3641	SPEED	19.47	21.00	1.422	62.9	1.006	-0.15	0.079	0.113
	LTE Band 48_Ant MIMO2	20M	QPSK	1	0	Bottom Face	19mm	OFF	56150	3641	SPEED	20.39	22.00	1.449	62.9	1.006	-0.18	0.214	0.312
	LTE Band 48_Ant MIMO2	20M	QPSK	50	0	Bottom Face	19mm	OFF	56150	3641	SPEED	19.47	21.00	1.422	62.9	1.006	0.03	0.171	0.245
	LTE Band 48_Ant MIMO2	20M	QPSK	1	0	Edge 1	22mm	OFF	56150	3641	SPEED	20.39	22.00	1.449	62.9	1.006	-0.15	0.040	0.058
	LTE Band 48_Ant MIMO2	20M	QPSK	50	0	Edge 1	22mm	OFF	56150	3641	SPEED	19.47	21.00	1.422	62.9	1.006	-0.15	0.036	0.052
	LTE Band 48_Ant MIMO2	20M	QPSK	1	0	Edge 4	22mm	OFF	56150	3641	SPEED	20.39	22.00	1.449	62.9	1.006	0.11	0.370	0.539
	LTE Band 48_Ant MIMO2	20M	QPSK	50	0	Edge 4	22mm	OFF	56150	3641	SPEED	19.47	21.00	1.422	62.9	1.006	-0.08	0.298	0.426



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Antenna Vendor	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 66_Ant Main	20M	QPSK	1	0	Bottom of Laptop	0mm	ON	132322	1745	SPEED	14.24	15.00	1.191	0.08	0.326	0.388
	LTE Band 66_Ant Main	20M	QPSK	50	0	Bottom of Laptop	0mm	ON	132322	1745	SPEED	13.22	14.00	1.197	0.01	0.259	0.310
	LTE Band 66_Ant Main	20M	QPSK	1	0	Bottom Face	0mm	ON	132322	1745	SPEED	14.24	15.00	1.191	-0.08	0.877	1.045
	LTE Band 66_Ant Main	20M	QPSK	1	0	Bottom Face	0mm	ON	132072	1720	SPEED	14.21	15.00	1.199	0	0.912	1.094
	LTE Band 66_Ant Main	20M	QPSK	1	0	Bottom Face	0mm	ON	132572	1770	SPEED	14.13	15.00	1.222	0.1	0.834	1.019
	LTE Band 66_Ant Main	20M	QPSK	50	0	Bottom Face	0mm	ON	132322	1745	SPEED	13.22	14.00	1.197	-0.18	0.629	0.753
	LTE Band 66_Ant Main	20M	QPSK	100	0	Bottom Face	0mm	ON	132322	1745	SPEED	13.11	14.00	1.227	0.1	0.630	0.773
	LTE Band 66_Ant Main	20M	QPSK	1	0	Edge 1	0mm	ON	132322	1745	SPEED	14.24	15.00	1.191	0.12	0.280	0.334
	LTE Band 66_Ant Main	20M	QPSK	50	0	Edge 1	0mm	ON	132322	1745	SPEED	13.22	14.00	1.197	0.08	0.201	0.241
	LTE Band 66_Ant Main	20M	QPSK	1	0	Edge 2	0mm	ON	132322	1745	SPEED	14.24	15.00	1.191	-0.17	0.361	0.430
	LTE Band 66_Ant Main	20M	QPSK	50	0	Edge 2	0mm	ON	132322	1745	SPEED	13.22	14.00	1.197	-0.03	0.260	0.311
	LTE Band 66_Ant Main	20M	QPSK	1	0	Bottom Face	0mm	ON	132072	1720	SAA	14.21	15.00	1.199	0.14	0.754	0.904
	LTE Band 66_Ant Main	20M	QPSK	1	0	Bottom Face	0mm	ON	132322	1745	SAA	14.24	15.00	1.191	0.08	0.725	0.864
	LTE Band 66_Ant Main	20M	QPSK	1	0	Bottom Face	0mm	ON	132572	1770	SAA	14.13	15.00	1.222	0.01	0.690	0.843
	LTE Band 66B_Ant Main	15M	QPSK	1	0	Bottom Face	0mm	ON	132229+132322	1735.7	SPEED	14.14	15.00	1.219	-0.01	0.817	0.996
	LTE Band 66B_Ant Main	15M	QPSK	1	0	Bottom Face	0mm	ON	132047+132140	1717.5	SPEED	14.04	15.00	1.247	-0.08	0.836	1.043
	LTE Band 66B_Ant Main	15M	QPSK	1	0	Bottom Face	0mm	ON	132504+132597	1763.2	SPEED	13.99	15.00	1.262	0.05	0.773	0.975
	LTE Band 66C_Ant Main	20M	QPSK	1	0	Bottom Face	0mm	ON	132322+132124	1745	SPEED	14.71	15.00	1.069	0.06	0.986	1.054
	LTE Band 66C_Ant Main	20M	QPSK	1	0	Bottom Face	0mm	ON	132072+132270	1720	SPEED	14.18	15.00	1.208	-0.09	0.859	1.038
	LTE Band 66C_Ant Main	20M	QPSK	1	0	Bottom Face	0mm	ON	132572+132374	1770	SPEED	14.62	15.00	1.091	-0.08	0.925	1.010
	LTE Band 66_Ant Main	20M	QPSK	1	0	Bottom of Laptop	25mm	OFF	132322	1745	SPEED	23.47	25.00	1.422	0.11	0.268	0.381
	LTE Band 66_Ant Main	20M	QPSK	50	0	Bottom of Laptop	25mm	OFF	132322	1745	SPEED	22.46	24.00	1.426	-0.05	0.213	0.304
	LTE Band 66_Ant Main	20M	QPSK	1	0	Bottom Face	25mm	OFF	132322	1745	SPEED	23.47	25.00	1.422	-0.05	0.404	0.575
	LTE Band 66_Ant Main	20M	QPSK	50	0	Bottom Face	25mm	OFF	132322	1745	SPEED	22.46	24.00	1.426	0.01	0.330	0.470
	LTE Band 66_Ant Main	20M	QPSK	1	0	Edge 1	24mm	OFF	132322	1745	SPEED	23.47	25.00	1.422	0.1	0.201	0.286
	LTE Band 66_Ant Main	20M	QPSK	50	0	Edge 1	24mm	OFF	132322	1745	SPEED	22.46	24.00	1.426	-0.17	0.161	0.230
	LTE Band 66_Ant Main	20M	QPSK	1	0	Edge 2	12mm	OFF	132322	1745	SPEED	23.47	25.00	1.422	0.04	0.107	0.152
	LTE Band 66_Ant Main	20M	QPSK	50	0	Edge 2	12mm	OFF	132322	1745	SPEED	22.46	24.00	1.426	-0.01	0.088	0.125



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Antenna Vendor	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 66_Ant MIMO2	20M	QPSK	1	0	Bottom of Laptop	0mm	ON	132322	1745	SPEED	12.66	13.00	1.081	0.08	0.295	0.319
	LTE Band 66_Ant MIMO2	20M	QPSK	50	0	Bottom of Laptop	0mm	ON	132322	1745	SPEED	12.62	13.00	1.091	0.01	0.290	0.317
	LTE Band 66_Ant MIMO2	20M	QPSK	1	0	Bottom Face	0mm	ON	132322	1745	SPEED	12.66	13.00	1.081	-0.08	0.914	0.988
	LTE Band 66_Ant MIMO2	20M	QPSK	1	0	Bottom Face	0mm	ON	132072	1720	SPEED	12.65	13.00	1.084	0.1	0.854	0.926
15	LTE Band 66_Ant MIMO2	20M	QPSK	1	0	Bottom Face	0mm	ON	132572	1770	SPEED	12.59	13.00	1.099	0.12	1.020	1.121
	LTE Band 66_Ant MIMO2	20M	QPSK	50	0	Bottom Face	0mm	ON	132322	1745	SPEED	12.62	13.00	1.091	-0.18	0.902	0.984
	LTE Band 66_Ant MIMO2	20M	QPSK	50	0	Bottom Face	0mm	ON	132072	1720	SPEED	12.60	13.00	1.096	0.1	0.843	0.924
	LTE Band 66_Ant MIMO2	20M	QPSK	50	0	Bottom Face	0mm	ON	132572	1770	SPEED	12.55	13.00	1.109	0.12	1.000	1.109
	LTE Band 66_Ant MIMO2	20M	QPSK	100	0	Bottom Face	0mm	ON	132322	1745	SPEED	12.56	13.00	1.107	0.08	0.871	0.964
	LTE Band 66_Ant MIMO2	20M	QPSK	1	0	Edge 1	0mm	ON	132322	1745	SPEED	12.66	13.00	1.081	-0.17	0.019	0.021
	LTE Band 66_Ant MIMO2	20M	QPSK	50	0	Edge 1	0mm	ON	132322	1745	SPEED	12.62	13.00	1.091	-0.03	0.018	0.020
	LTE Band 66_Ant MIMO2	20M	QPSK	1	0	Edge 4	0mm	ON	132322	1745	SPEED	12.66	13.00	1.081	0.14	0.630	0.681
	LTE Band 66_Ant MIMO2	20M	QPSK	50	0	Edge 4	0mm	ON	132322	1745	SPEED	12.62	13.00	1.091	-0.05	0.659	0.719
	LTE Band 66_Ant MIMO2	20M	QPSK	1	0	Bottom Face	0mm	ON	132572	1770	SAA	12.59	13.00	1.099	0.18	0.870	0.956
	LTE Band 66_Ant MIMO2	20M	QPSK	1	0	Bottom Face	0mm	ON	132072	1720	SAA	12.65	13.00	1.084	0.14	0.728	0.789
	LTE Band 66_Ant MIMO2	20M	QPSK	1	0	Bottom Face	0mm	ON	132322	1745	SAA	12.66	13.00	1.081	-0.17	0.780	0.844
	LTE Band 66_Ant MIMO2	20M	QPSK	1	0	Bottom of Laptop	17mm	OFF	132322	1745	SPEED	23.21	24.00	1.199	0.17	0.281	0.337
	LTE Band 66_Ant MIMO2	20M	QPSK	50	0	Bottom of Laptop	17mm	OFF	132322	1745	SPEED	22.15	23.00	1.216	-0.05	0.258	0.314
	LTE Band 66_Ant MIMO2	20M	QPSK	1	0	Bottom Face	19mm	OFF	132322	1745	SPEED	23.21	24.00	1.199	-0.17	0.273	0.327
	LTE Band 66_Ant MIMO2	20M	QPSK	50	0	Bottom Face	19mm	OFF	132322	1745	SPEED	22.15	23.00	1.216	0.04	0.232	0.282
	LTE Band 66_Ant MIMO2	20M	QPSK	1	0	Edge 1	22mm	OFF	132322	1745	SPEED	23.21	24.00	1.199	-0.01	0.001	0.001
	LTE Band 66_Ant MIMO2	20M	QPSK	50	0	Edge 1	22mm	OFF	132322	1745	SPEED	22.15	23.00	1.216	-0.08	0.001	0.001
	LTE Band 66_Ant MIMO2	20M	QPSK	1	0	Edge 4	22mm	OFF	132322	1745	SPEED	23.21	24.00	1.199	0.05	0.295	0.354
	LTE Band 66_Ant MIMO2	20M	QPSK	50	0	Edge 4	22mm	OFF	132322	1745	SPEED	22.15	23.00	1.216	0.06	0.242	0.294
	LTE Band 71_Ant Main	20M	QPSK	1	0	Bottom of Laptop	0mm	ON	133297	680.5	SPEED	14.58	16.00	1.387	0.08	0.143	0.198
	LTE Band 71_Ant Main	20M	QPSK	50	0	Bottom of Laptop	0mm	ON	133297	680.5	SPEED	13.69	15.00	1.352	0.01	0.103	0.139
	LTE Band 71_Ant Main	20M	QPSK	1	0	Bottom Face	0mm	ON	133297	680.5	SPEED	14.58	16.00	1.387	0.01	0.642	0.890
	LTE Band 71_Ant Main	20M	QPSK	50	0	Bottom Face	0mm	ON	133297	680.5	SPEED	13.69	15.00	1.352	-0.08	0.462	0.625
	LTE Band 71_Ant Main	20M	QPSK	100	0	Bottom Face	0mm	ON	133297	680.5	SPEED	13.66	15.00	1.361	0.01	0.451	0.614
	LTE Band 71_Ant Main	20M	QPSK	1	0	Edge 1	0mm	ON	133297	680.5	SPEED	14.58	16.00	1.387	0.1	0.053	0.073
	LTE Band 71_Ant Main	20M	QPSK	50	0	Edge 1	0mm	ON	133297	680.5	SPEED	13.69	15.00	1.352	-0.18	0.038	0.051
16	LTE Band 71_Ant Main	20M	QPSK	1	0	Edge 2	0mm	ON	133297	680.5	SPEED	14.58	16.00	1.387	0.14	0.827	1.147
	LTE Band 71_Ant Main	20M	QPSK	50	0	Edge 2	0mm	ON	133297	680.5	SPEED	13.69	15.00	1.352	0.1	0.594	0.803
	LTE Band 71_Ant Main	20M	QPSK	100	0	Edge 2	0mm	ON	133297	680.5	SPEED	13.66	15.00	1.361	0.12	0.575	0.783
	LTE Band 71_Ant Main	20M	QPSK	1	0	Edge 2	0mm	ON	133297	680.5	SAA	14.58	16.00	1.387	0.08	0.761	1.055
	LTE Band 71_Ant Main	20M	QPSK	1	0	Bottom of Laptop	25mm	OFF	133297	680.5	SPEED	23.61	25.00	1.377	-0.09	0.078	0.107
	LTE Band 71_Ant Main	20M	QPSK	50	0	Bottom of Laptop	25mm	OFF	133297	680.5	SPEED	22.60	24.00	1.380	-0.08	0.062	0.086
	LTE Band 71_Ant Main	20M	QPSK	1	0	Bottom Face	25mm	OFF	133297	680.5	SPEED	23.61	25.00	1.377	0.03	0.062	0.085
	LTE Band 71_Ant Main	20M	QPSK	50	0	Bottom Face	25mm	OFF	133297	680.5	SPEED	22.60	24.00	1.380	0.18	0.048	0.066
	LTE Band 71_Ant Main	20M	QPSK	1	0	Edge 1	24mm	OFF	133297	680.5	SPEED	23.61	25.00	1.377	0.16	0.001	0.001
	LTE Band 71_Ant Main	20M	QPSK	50	0	Edge 1	24mm	OFF	133297	680.5	SPEED	22.60	24.00	1.380	-0.1	0.001	0.001
	LTE Band 71_Ant Main	20M	QPSK	1	0	Edge 2	12mm	OFF	133297	680.5	SPEED	23.61	25.00	1.377	0.07	0.113	0.156
	LTE Band 71_Ant Main	20M	QPSK	50	0	Edge 2	12mm	OFF	133297	680.5	SPEED	22.60	24.00	1.380	0.18	0.088	0.121



<5G NR SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Antenna Vendor	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	FR1 n7_Ant Main	40M	BPSK	1	1	Bottom of Laptop	0mm	ON	507000	2535	SPEED	13.02	13.50	1.117	0.08	0.248	0.277
	FR1 n7_Ant Main	40M	BPSK	108	54	Bottom of Laptop	0mm	ON	507000	2535	SPEED	12.99	13.50	1.125	0.01	0.239	0.269
17	FR1 n7_Ant Main	40M	BPSK	1	1	Bottom Face	0mm	ON	507000	2535	SPEED	13.02	13.50	1.117	0.19	1.000	1.117
	FR1 n7_Ant Main	40M	BPSK	108	54	Bottom Face	0mm	ON	507000	2535	SPEED	12.99	13.50	1.125	-0.08	0.972	1.093
	FR1 n7_Ant Main	40M	BPSK	216	0	Bottom Face	0mm	ON	507000	2535	SPEED	12.92	13.50	1.143	0.1	0.935	1.069
	FR1 n7_Ant Main	40M	BPSK	1	1	Edge 1	0mm	ON	507000	2535	SPEED	13.02	13.50	1.117	-0.18	0.293	0.327
	FR1 n7_Ant Main	40M	BPSK	108	54	Edge 1	0mm	ON	507000	2535	SPEED	12.99	13.50	1.125	0.1	0.285	0.321
	FR1 n7_Ant Main	40M	BPSK	1	1	Edge 2	0mm	ON	507000	2535	SPEED	13.02	13.50	1.117	0.12	0.062	0.069
	FR1 n7_Ant Main	40M	BPSK	108	54	Edge 2	0mm	ON	507000	2535	SPEED	12.99	13.50	1.125	0.08	0.059	0.066
	FR1 n7_Ant Main	40M	BPSK	1	1	Bottom Face	0mm	ON	507000	2535	SAA	13.02	13.50	1.117	-0.17	0.965	1.078
	FR1 n7_Ant Main	40M	BPSK	1	1	Bottom of Laptop	25mm	OFF	507000	2535	SPEED	24.02	25.00	1.253	-0.03	0.146	0.183
	FR1 n7_Ant Main	40M	BPSK	108	54	Bottom of Laptop	25mm	OFF	507000	2535	SPEED	23.78	25.00	1.324	0.14	0.158	0.209
	FR1 n7_Ant Main	40M	BPSK	1	1	Bottom Face	25mm	OFF	507000	2535	SPEED	24.02	25.00	1.253	0.18	0.181	0.227
	FR1 n7_Ant Main	40M	BPSK	108	54	Bottom Face	25mm	OFF	507000	2535	SPEED	23.78	25.00	1.324	0.14	0.166	0.220
	FR1 n7_Ant Main	40M	BPSK	1	1	Edge 1	24mm	OFF	507000	2535	SPEED	24.02	25.00	1.253	-0.17	0.180	0.226
	FR1 n7_Ant Main	40M	BPSK	108	54	Edge 1	24mm	OFF	507000	2535	SPEED	23.78	25.00	1.324	0.17	0.164	0.217
	FR1 n7_Ant Main	40M	BPSK	1	1	Edge 2	12mm	OFF	507000	2535	SPEED	24.02	25.00	1.253	-0.05	0.089	0.112
	FR1 n7_Ant Main	40M	BPSK	108	54	Edge 2	12mm	OFF	507000	2535	SPEED	23.78	25.00	1.324	0.01	0.082	0.109
	FR1 n7_Ant MIMO2	40M	BPSK	1	1	Bottom of Laptop	0mm	ON	507000	2535	SPEED	7.93	8.50	1.140	0.1	0.118	0.135
	FR1 n7_Ant MIMO2	40M	BPSK	108	54	Bottom of Laptop	0mm	ON	507000	2535	SPEED	7.77	8.50	1.183	-0.17	0.108	0.128
	FR1 n7_Ant MIMO2	40M	BPSK	1	1	Bottom Face	0mm	ON	507000	2535	SPEED	7.93	8.50	1.140	0.03	0.927	1.057
	FR1 n7_Ant MIMO2	40M	BPSK	108	54	Bottom Face	0mm	ON	507000	2535	SPEED	7.77	8.50	1.183	-0.08	0.846	1.001
	FR1 n7_Ant MIMO2	40M	BPSK	216	0	Bottom Face	0mm	ON	507000	2535	SPEED	7.75	8.50	1.189	0.05	0.760	0.903
	FR1 n7_Ant MIMO2	40M	BPSK	1	1	Edge 1	0mm	ON	507000	2535	SPEED	7.93	8.50	1.140	0.06	0.007	0.008
	FR1 n7_Ant MIMO2	40M	BPSK	108	54	Edge 1	0mm	ON	507000	2535	SPEED	7.77	8.50	1.183	-0.09	0.006	0.007
	FR1 n7_Ant MIMO2	40M	BPSK	1	1	Edge 4	0mm	ON	507000	2535	SPEED	7.93	8.50	1.140	0.08	0.924	1.054
	FR1 n7_Ant MIMO2	40M	BPSK	108	54	Edge 4	0mm	ON	507000	2535	SPEED	7.77	8.50	1.183	-0.08	0.843	0.997
	FR1 n7_Ant MIMO2	40M	BPSK	216	0	Edge 4	0mm	ON	507000	2535	SPEED	7.75	8.50	1.189	0.13	0.758	0.901
	FR1 n7_Ant MIMO2	40M	BPSK	1	1	Bottom Face	0mm	ON	507000	2535	SAA	7.93	8.50	1.140	0.12	0.765	0.872
	FR1 n7_Ant MIMO2	40M	BPSK	1	1	Bottom of Laptop	17mm	OFF	507000	2535	SPEED	23.11	24.00	1.227	0.03	0.263	0.323
	FR1 n7_Ant MIMO2	40M	BPSK	108	54	Bottom of Laptop	17mm	OFF	507000	2535	SPEED	23.00	24.00	1.259	0.18	0.258	0.325
	FR1 n7_Ant MIMO2	40M	BPSK	1	1	Bottom Face	19mm	OFF	507000	2535	SPEED	23.11	24.00	1.227	0.07	0.546	0.670
	FR1 n7_Ant MIMO2	40M	BPSK	108	54	Bottom Face	19mm	OFF	507000	2535	SPEED	23.00	24.00	1.259	0.18	0.470	0.592
	FR1 n7_Ant MIMO2	40M	BPSK	1	1	Edge 1	22mm	OFF	507000	2535	SPEED	23.11	24.00	1.227	-0.1	0.055	0.068
	FR1 n7_Ant MIMO2	40M	BPSK	108	54	Edge 1	22mm	OFF	507000	2535	SPEED	23.00	24.00	1.259	0.01	0.051	0.064
	FR1 n7_Ant MIMO2	40M	BPSK	1	1	Edge 4	22mm	OFF	507000	2535	SPEED	23.11	24.00	1.227	-0.15	0.781	0.959
	FR1 n7_Ant MIMO2	40M	BPSK	108	54	Edge 4	22mm	OFF	507000	2535	SPEED	23.00	24.00	1.259	0.19	0.671	0.845
	FR1 n7_Ant MIMO2	40M	BPSK	216	0	Edge 4	22mm	OFF	507000	2535	SPEED	23.04	23.50	1.112	0.05	0.603	0.670



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Antenna Vendor	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	FR1 n12_Ant Main	15M	BPSK	1	1	Bottom of Laptop	0mm	ON	141500	707.5	SPEED	15.93	16.50	1.140	0.07	0.129	0.147
	FR1 n12_Ant Main	15M	BPSK	36	22	Bottom of Laptop	0mm	ON	141500	707.5	SPEED	15.81	16.50	1.172	-0.18	0.127	0.149
18	FR1 n12_Ant Main	15M	BPSK	1	1	Bottom Face	0mm	ON	141500	707.5	SPEED	15.93	16.50	1.140	-0.02	0.966	1.101
	FR1 n12_Ant Main	15M	BPSK	36	22	Bottom Face	0mm	ON	141500	707.5	SPEED	15.81	16.50	1.172	-0.15	0.933	1.094
	FR1 n12_Ant Main	15M	BPSK	75	0	Bottom Face	0mm	ON	141500	707.5	SPEED	15.73	16.50	1.194	0.01	0.919	1.097
	FR1 n12_Ant Main	15M	BPSK	1	1	Edge 1	0mm	ON	141500	707.5	SPEED	15.93	16.50	1.140	0.11	0.061	0.070
	FR1 n12_Ant Main	15M	BPSK	36	22	Edge 1	0mm	ON	141500	707.5	SPEED	15.81	16.50	1.172	-0.08	0.060	0.070
	FR1 n12_Ant Main	15M	BPSK	1	1	Edge 2	0mm	ON	141500	707.5	SPEED	15.93	16.50	1.140	-0.17	0.735	0.838
	FR1 n12_Ant Main	15M	BPSK	36	22	Edge 2	0mm	ON	141500	707.5	SPEED	15.81	16.50	1.172	-0.08	0.720	0.844
	FR1 n12_Ant Main	15M	BPSK	75	0	Edge 2	0mm	ON	141500	707.5	SPEED	15.73	16.50	1.194	0.05	0.708	0.845
	FR1 n12_Ant Main	15M	BPSK	1	1	Bottom Face	0mm	ON	141500	707.5	SAA	15.93	16.50	1.140	-0.04	0.674	0.769
	FR1 n12_Ant Main	15M	BPSK	1	1	Bottom of Laptop	25mm	OFF	141500	707.5	SPEED	24.16	25.00	1.213	-0.08	0.071	0.086
	FR1 n12_Ant Main	15M	BPSK	36	22	Bottom of Laptop	25mm	OFF	141500	707.5	SPEED	24.04	25.00	1.247	0.17	0.068	0.085
	FR1 n12_Ant Main	15M	BPSK	1	1	Bottom Face	25mm	OFF	141500	707.5	SPEED	24.16	25.00	1.213	-0.08	0.056	0.068
	FR1 n12_Ant Main	15M	BPSK	36	22	Bottom Face	25mm	OFF	141500	707.5	SPEED	24.04	25.00	1.247	-0.13	0.049	0.061
	FR1 n12_Ant Main	15M	BPSK	1	1	Edge 1	24mm	OFF	141500	707.5	SPEED	24.16	25.00	1.213	-0.13	0.001	0.001
	FR1 n12_Ant Main	15M	BPSK	36	22	Edge 1	24mm	OFF	141500	707.5	SPEED	24.04	25.00	1.247	0.06	0.001	0.001
	FR1 n12_Ant Main	15M	BPSK	1	1	Edge 2	12mm	OFF	141500	707.5	SPEED	24.16	25.00	1.213	-0.03	0.113	0.137
	FR1 n12_Ant Main	15M	BPSK	36	22	Edge 2	12mm	OFF	141500	707.5	SPEED	24.04	25.00	1.247	-0.03	0.098	0.122
	FR1 n13_Ant Main	10M	BPSK	1	1	Bottom of Laptop	0mm	ON	156400	782	SPEED	17.70	19.00	1.349	0.08	0.320	0.432
	FR1 n13_Ant Main	10M	BPSK	25	14	Bottom of Laptop	0mm	ON	156400	782	SPEED	17.57	19.00	1.390	-0.07	0.300	0.417
19	FR1 n13_Ant Main	10M	BPSK	1	1	Bottom Face	0mm	ON	156400	782	SPEED	17.70	19.00	1.349	-0.03	0.886	1.195
	FR1 n13_Ant Main	10M	BPSK	25	14	Bottom Face	0mm	ON	156400	782	SPEED	17.57	19.00	1.390	-0.12	0.839	1.166
	FR1 n13_Ant Main	10M	BPSK	50	0	Bottom Face	0mm	ON	156400	782	SPEED	17.56	19.00	1.393	0.05	0.843	1.174
	FR1 n13_Ant Main	10M	BPSK	1	1	Edge 1	0mm	ON	156400	782	SPEED	17.70	19.00	1.349	0.03	0.172	0.232
	FR1 n13_Ant Main	10M	BPSK	25	14	Edge 1	0mm	ON	156400	782	SPEED	17.57	19.00	1.390	-0.16	0.159	0.221
	FR1 n13_Ant Main	10M	BPSK	1	1	Edge 2	0mm	ON	156400	782	SPEED	17.70	19.00	1.349	-0.02	0.575	0.776
	FR1 n13_Ant Main	10M	BPSK	25	14	Edge 2	0mm	ON	156400	782	SPEED	17.57	19.00	1.390	0.15	0.539	0.749
	FR1 n13_Ant Main	10M	BPSK	1	1	Bottom Face	0mm	ON	156400	782	SAA	17.70	19.00	1.349	-0.09	0.744	1.004
	FR1 n13_Ant Main	10M	BPSK	1	1	Bottom of Laptop	25mm	OFF	156400	782	SPEED	23.80	25.00	1.318	0.11	0.144	0.190
	FR1 n13_Ant Main	10M	BPSK	25	14	Bottom of Laptop	25mm	OFF	156400	782	SPEED	23.78	25.00	1.324	-0.05	0.136	0.180
	FR1 n13_Ant Main	10M	BPSK	1	1	Bottom Face	25mm	OFF	156400	782	SPEED	23.80	25.00	1.318	0.05	0.130	0.171
	FR1 n13_Ant Main	10M	BPSK	25	14	Bottom Face	25mm	OFF	156400	782	SPEED	23.78	25.00	1.324	0.05	0.126	0.167
	FR1 n13_Ant Main	10M	BPSK	1	1	Edge 1	24mm	OFF	156400	782	SPEED	23.80	25.00	1.318	-0.03	0.076	0.100
	FR1 n13_Ant Main	10M	BPSK	25	14	Edge 1	24mm	OFF	156400	782	SPEED	23.78	25.00	1.324	-0.15	0.048	0.064
	FR1 n13_Ant Main	10M	BPSK	1	1	Edge 2	12mm	OFF	156400	782	SPEED	23.80	25.00	1.318	0.02	0.229	0.302
	FR1 n13_Ant Main	10M	BPSK	25	14	Edge 2	12mm	OFF	156400	782	SPEED	23.78	25.00	1.324	0.07	0.227	0.301



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Antenna Vendor	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	FR1 n14_Ant Main	10M	BPSK	1	1	Bottom of Laptop	0mm	ON	158600	793	SPEED	18.05	19.00	1.245	0.08	0.289	0.360
	FR1 n14_Ant Main	10M	BPSK	25	14	Bottom of Laptop	0mm	ON	158600	793	SPEED	17.90	19.00	1.288	0.01	0.259	0.334
20	FR1 n14_Ant Main	10M	BPSK	1	1	Bottom Face	0mm	ON	158600	793	SPEED	18.05	19.00	1.245	0.03	0.946	1.177
	FR1 n14_Ant Main	10M	BPSK	25	14	Bottom Face	0mm	ON	158600	793	SPEED	17.90	19.00	1.288	-0.08	0.863	1.112
	FR1 n14_Ant Main	10M	BPSK	50	0	Bottom Face	0mm	ON	158600	793	SPEED	17.84	19.00	1.306	0.1	0.866	1.131
	FR1 n14_Ant Main	10M	BPSK	1	1	Edge 1	0mm	ON	158600	793	SPEED	18.05	19.00	1.245	-0.18	0.131	0.163
	FR1 n14_Ant Main	10M	BPSK	25	14	Edge 1	0mm	ON	158600	793	SPEED	17.90	19.00	1.288	0.1	0.120	0.155
	FR1 n14_Ant Main	10M	BPSK	1	1	Edge 2	0mm	ON	158600	793	SPEED	18.05	19.00	1.245	0.12	0.410	0.510
	FR1 n14_Ant Main	10M	BPSK	25	14	Edge 2	0mm	ON	158600	793	SPEED	17.90	19.00	1.288	0.08	0.374	0.482
	FR1 n14_Ant Main	10M	BPSK	1	1	Bottom Face	0mm	ON	158600	793	SAA	18.05	19.00	1.245	-0.17	0.531	0.661
	FR1 n14_Ant Main	10M	BPSK	1	1	Bottom of Laptop	25mm	OFF	158600	793	SPEED	24.00	25.00	1.259	-0.03	0.161	0.203
	FR1 n14_Ant Main	10M	BPSK	25	14	Bottom of Laptop	25mm	OFF	158600	793	SPEED	23.76	25.00	1.330	0.14	0.159	0.212
	FR1 n14_Ant Main	10M	BPSK	1	1	Bottom Face	25mm	OFF	158600	793	SPEED	24.00	25.00	1.259	0.18	0.135	0.170
	FR1 n14_Ant Main	10M	BPSK	25	14	Bottom Face	25mm	OFF	158600	793	SPEED	23.76	25.00	1.330	0.14	0.131	0.174
	FR1 n14_Ant Main	10M	BPSK	1	1	Edge 1	24mm	OFF	158600	793	SPEED	24.00	25.00	1.259	-0.17	0.084	0.106
	FR1 n14_Ant Main	10M	BPSK	25	14	Edge 1	24mm	OFF	158600	793	SPEED	23.76	25.00	1.330	0.17	0.073	0.097
	FR1 n14_Ant Main	10M	BPSK	1	1	Edge 2	12mm	OFF	158600	793	SPEED	24.00	25.00	1.259	-0.05	0.202	0.254
	FR1 n14_Ant Main	10M	BPSK	25	14	Edge 2	12mm	OFF	158600	793	SPEED	23.76	25.00	1.330	0.01	0.183	0.243
	FR1 n25_Ant Main	40M	BPSK	1	1	Bottom of Laptop	0mm	ON	376500	1882.5	SPEED	14.16	15.00	1.213	-0.08	0.309	0.375
	FR1 n25_Ant Main	40M	BPSK	108	54	Bottom of Laptop	0mm	ON	376500	1882.5	SPEED	14.03	15.00	1.250	0.05	0.297	0.371
	FR1 n25_Ant Main	40M	BPSK	1	1	Bottom Face	0mm	ON	376500	1882.5	SPEED	14.16	15.00	1.213	-0.08	0.902	1.094
	FR1 n25_Ant Main	40M	BPSK	108	54	Bottom Face	0mm	ON	376500	1882.5	SPEED	14.03	15.00	1.250	0.13	0.865	1.081
	FR1 n25_Ant Main	40M	BPSK	216	0	Bottom Face	0mm	ON	376500	1882.5	SPEED	14.00	15.00	1.259	0.01	0.860	1.083
	FR1 n25_Ant Main	40M	BPSK	1	1	Edge 1	0mm	ON	376500	1882.5	SPEED	14.16	15.00	1.213	0.12	0.280	0.340
	FR1 n25_Ant Main	40M	BPSK	108	54	Edge 1	0mm	ON	376500	1882.5	SPEED	14.03	15.00	1.250	0.03	0.264	0.330
	FR1 n25_Ant Main	40M	BPSK	1	1	Edge 2	0mm	ON	376500	1882.5	SPEED	14.16	15.00	1.213	0.18	0.265	0.322
	FR1 n25_Ant Main	40M	BPSK	108	54	Edge 2	0mm	ON	376500	1882.5	SPEED	14.03	15.00	1.250	0.16	0.251	0.314
	FR1 n25_Ant Main	40M	BPSK	1	1	Bottom Face	0mm	ON	376500	1882.5	SAA	14.16	15.00	1.213	0.17	0.928	1.126
	FR1 n25_Ant Main	40M	BPSK	1	1	Bottom of Laptop	25mm	OFF	376500	1882.5	SPEED	24.02	25.00	1.253	0.1	0.228	0.286
	FR1 n25_Ant Main	40M	BPSK	108	54	Bottom of Laptop	25mm	OFF	376500	1882.5	SPEED	23.86	25.00	1.300	-0.17	0.212	0.276
	FR1 n25_Ant Main	40M	BPSK	1	1	Bottom Face	25mm	OFF	376500	1882.5	SPEED	24.02	25.00	1.253	-0.08	0.273	0.342
	FR1 n25_Ant Main	40M	BPSK	108	54	Bottom Face	25mm	OFF	376500	1882.5	SPEED	23.86	25.00	1.300	0.05	0.270	0.351
	FR1 n25_Ant Main	40M	BPSK	1	1	Edge 1	24mm	OFF	376500	1882.5	SPEED	24.02	25.00	1.253	0.06	0.285	0.357
	FR1 n25_Ant Main	40M	BPSK	108	54	Edge 1	24mm	OFF	376500	1882.5	SPEED	23.86	25.00	1.300	-0.09	0.263	0.342
	FR1 n25_Ant Main	40M	BPSK	1	1	Edge 2	12mm	OFF	376500	1882.5	SPEED	24.02	25.00	1.253	-0.08	0.105	0.132
	FR1 n25_Ant Main	40M	BPSK	108	54	Edge 2	12mm	OFF	376500	1882.5	SPEED	23.86	25.00	1.300	0.13	0.092	0.120



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Antenna Vendor	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	FR1 n25_Ant MIMO2	40M	BPSK	1	1	Bottom of Laptop	0mm	ON	376500	1882.5	SPEED	12.30	13.00	1.175	-0.18	0.248	0.291
	FR1 n25_Ant MIMO2	40M	BPSK	108	54	Bottom of Laptop	0mm	ON	376500	1882.5	SPEED	12.18	13.00	1.208	0.03	0.237	0.286
	FR1 n25_Ant MIMO2	40M	BPSK	1	1	Bottom Face	0mm	ON	376500	1882.5	SPEED	12.30	13.00	1.175	0.11	0.849	0.997
	FR1 n25_Ant MIMO2	40M	BPSK	108	54	Bottom Face	0mm	ON	376500	1882.5	SPEED	12.18	13.00	1.208	-0.08	0.816	0.986
	FR1 n25_Ant MIMO2	40M	BPSK	216	0	Bottom Face	0mm	ON	376500	1882.5	SPEED	12.16	13.00	1.213	-0.17	0.732	0.888
	FR1 n25_Ant MIMO2	40M	BPSK	1	1	Edge 1	0mm	ON	376500	1882.5	SPEED	12.30	13.00	1.175	-0.08	0.013	0.015
	FR1 n25_Ant MIMO2	40M	BPSK	108	54	Edge 1	0mm	ON	376500	1882.5	SPEED	12.18	13.00	1.208	-0.04	0.013	0.016
	FR1 n25_Ant MIMO2	40M	BPSK	1	1	Edge 4	0mm	ON	376500	1882.5	SPEED	12.30	13.00	1.175	-0.08	0.915	1.075
	FR1 n25_Ant MIMO2	40M	BPSK	108	54	Edge 4	0mm	ON	376500	1882.5	SPEED	12.18	13.00	1.208	0.17	0.877	1.059
	FR1 n25_Ant MIMO2	40M	BPSK	216	0	Edge 4	0mm	ON	376500	1882.5	SPEED	12.16	13.00	1.213	0.18	0.787	0.955
21	FR1 n25_Ant MIMO2	40M	BPSK	1	1	Edge 4	0mm	ON	376500	1882.5	SAA	12.30	13.00	1.175	-0.03	1.020	1.198
	FR1 n25_Ant MIMO2	40M	BPSK	1	1	Bottom of Laptop	17mm	OFF	376500	1882.5	SPEED	23.05	24.00	1.245	0.12	0.353	0.439
	FR1 n25_Ant MIMO2	40M	BPSK	108	54	Bottom of Laptop	17mm	OFF	376500	1882.5	SPEED	22.98	24.00	1.265	0.03	0.299	0.378
	FR1 n25_Ant MIMO2	40M	BPSK	1	1	Bottom Face	19mm	OFF	376500	1882.5	SPEED	23.05	24.00	1.245	-0.1	0.423	0.526
	FR1 n25_Ant MIMO2	40M	BPSK	108	54	Bottom Face	19mm	OFF	376500	1882.5	SPEED	22.98	24.00	1.265	0.07	0.372	0.470
	FR1 n25_Ant MIMO2	40M	BPSK	1	1	Edge 1	22mm	OFF	376500	1882.5	SPEED	23.05	24.00	1.245	0.18	0.001	0.001
	FR1 n25_Ant MIMO2	40M	BPSK	108	54	Edge 1	22mm	OFF	376500	1882.5	SPEED	22.98	24.00	1.265	-0.1	0.001	0.001
	FR1 n25_Ant MIMO2	40M	BPSK	1	1	Edge 4	22mm	OFF	376500	1882.5	SPEED	23.05	24.00	1.245	0.01	0.668	0.831
	FR1 n25_Ant MIMO2	40M	BPSK	108	54	Edge 4	22mm	OFF	376500	1882.5	SPEED	22.98	24.00	1.265	-0.15	0.637	0.806
	FR1 n26_Ant Main	20M	BPSK	1	1	Bottom of Laptop	0mm	ON	166300	831.5	SPEED	17.35	18.00	1.161	0.19	0.238	0.276
	FR1 n26_Ant Main	20M	BPSK	50	28	Bottom of Laptop	0mm	ON	166300	831.5	SPEED	17.28	18.00	1.180	0.07	0.220	0.260
22	FR1 n26_Ant Main	20M	BPSK	1	1	Bottom Face	0mm	ON	166300	831.5	SPEED	17.35	18.00	1.161	-0.03	0.981	1.139
	FR1 n26_Ant Main	20M	BPSK	50	28	Bottom Face	0mm	ON	166300	831.5	SPEED	17.28	18.00	1.180	-0.15	0.906	1.069
	FR1 n26_Ant Main	20M	BPSK	100	0	Bottom Face	0mm	ON	166300	831.5	SPEED	17.22	18.00	1.197	-0.15	0.931	1.114
	FR1 n26_Ant Main	20M	BPSK	1	1	Edge 1	0mm	ON	166300	831.5	SPEED	17.35	18.00	1.161	0.11	0.124	0.144
	FR1 n26_Ant Main	20M	BPSK	50	28	Edge 1	0mm	ON	166300	831.5	SPEED	17.28	18.00	1.180	-0.08	0.115	0.136
	FR1 n26_Ant Main	20M	BPSK	1	1	Edge 2	0mm	ON	166300	831.5	SPEED	17.35	18.00	1.161	-0.17	0.606	0.704
	FR1 n26_Ant Main	20M	BPSK	50	28	Edge 2	0mm	ON	166300	831.5	SPEED	17.28	18.00	1.180	-0.08	0.561	0.662
	FR1 n26_Ant Main	20M	BPSK	1	1	Bottom Face	0mm	ON	166300	831.5	SAA	17.35	18.00	1.161	-0.04	0.692	0.804
	FR1 n26_Ant Main	20M	BPSK	1	1	Bottom of Laptop	25mm	OFF	166300	831.5	SPEED	23.94	25.00	1.276	-0.08	0.138	0.176
	FR1 n26_Ant Main	20M	BPSK	50	28	Bottom of Laptop	25mm	OFF	166300	831.5	SPEED	23.75	25.00	1.334	0.17	0.130	0.173
	FR1 n26_Ant Main	20M	BPSK	1	1	Bottom Face	25mm	OFF	166300	831.5	SPEED	23.94	25.00	1.276	-0.08	0.109	0.139
	FR1 n26_Ant Main	20M	BPSK	50	28	Bottom Face	25mm	OFF	166300	831.5	SPEED	23.75	25.00	1.334	-0.13	0.095	0.127
	FR1 n26_Ant Main	20M	BPSK	1	1	Edge 1	24mm	OFF	166300	831.5	SPEED	23.94	25.00	1.276	-0.13	0.068	0.087
	FR1 n26_Ant Main	20M	BPSK	50	28	Edge 1	24mm	OFF	166300	831.5	SPEED	23.75	25.00	1.334	0.06	0.051	0.068
	FR1 n26_Ant Main	20M	BPSK	1	1	Edge 2	12mm	OFF	166300	831.5	SPEED	23.94	25.00	1.276	-0.03	0.164	0.209
	FR1 n26_Ant Main	20M	BPSK	50	28	Edge 2	12mm	OFF	166300	831.5	SPEED	23.75	25.00	1.334	-0.03	0.155	0.207



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Antenna Vendor	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	FR1 n30_Ant Main	10M	BPSK	1	1	Bottom of Laptop	0mm	ON	462000	2310	SPEED	12.53	13.00	1.114	0.08	0.246	0.274
	FR1 n30_Ant Main	10M	BPSK	25	14	Bottom of Laptop	0mm	ON	462000	2310	SPEED	12.48	13.00	1.127	-0.07	0.242	0.273
	FR1 n30_Ant Main	10M	BPSK	1	1	Bottom Face	0mm	ON	462000	2310	SPEED	12.53	13.00	1.114	-0.12	0.796	0.887
	FR1 n30_Ant Main	10M	BPSK	25	14	Bottom Face	0mm	ON	462000	2310	SPEED	12.48	13.00	1.127	0.03	0.787	0.887
	FR1 n30_Ant Main	10M	BPSK	50	0	Bottom Face	0mm	ON	462000	2310	SPEED	12.33	13.00	1.167	-0.16	0.785	0.916
	FR1 n30_Ant Main	10M	BPSK	1	1	Edge 1	0mm	ON	462000	2310	SPEED	12.53	13.00	1.114	-0.02	0.216	0.241
	FR1 n30_Ant Main	10M	BPSK	25	14	Edge 1	0mm	ON	462000	2310	SPEED	12.48	13.00	1.127	0.15	0.214	0.241
	FR1 n30_Ant Main	10M	BPSK	1	1	Edge 2	0mm	ON	462000	2310	SPEED	12.53	13.00	1.114	-0.09	0.365	0.407
	FR1 n30_Ant Main	10M	BPSK	25	14	Edge 2	0mm	ON	462000	2310	SPEED	12.48	13.00	1.127	0.11	0.360	0.406
	FR1 n30_Ant Main	10M	BPSK	1	1	Bottom Face	0mm	ON	462000	2310	SAA	12.53	13.00	1.114	0.13	0.929	1.035
	FR1 n30_Ant Main	10M	BPSK	1	1	Bottom of Laptop	25mm	OFF	462000	2310	SPEED	21.73	23.00	1.340	-0.05	0.086	0.115
	FR1 n30_Ant Main	10M	BPSK	25	14	Bottom of Laptop	25mm	OFF	462000	2310	SPEED	21.68	23.00	1.355	-0.08	0.084	0.114
	FR1 n30_Ant Main	10M	BPSK	1	1	Bottom Face	25mm	OFF	462000	2310	SPEED	21.73	23.00	1.340	0.05	0.192	0.257
	FR1 n30_Ant Main	10M	BPSK	25	14	Bottom Face	25mm	OFF	462000	2310	SPEED	21.68	23.00	1.355	-0.03	0.182	0.247
	FR1 n30_Ant Main	10M	BPSK	1	1	Edge 1	24mm	OFF	462000	2310	SPEED	21.73	23.00	1.340	-0.15	0.176	0.236
	FR1 n30_Ant Main	10M	BPSK	25	14	Edge 1	24mm	OFF	462000	2310	SPEED	21.68	23.00	1.355	0.02	0.140	0.190
	FR1 n30_Ant Main	10M	BPSK	1	1	Edge 2	12mm	OFF	462000	2310	SPEED	21.73	23.00	1.340	0.07	0.371	0.497
	FR1 n30_Ant Main	10M	BPSK	25	14	Edge 2	12mm	OFF	462000	2310	SPEED	21.68	23.00	1.355	0.16	0.366	0.496
	FR1 n30_Ant MIMO2	10M	BPSK	1	1	Bottom of Laptop	0mm	ON	462000	2310	SPEED	9.81	11.00	1.315	0.08	0.128	0.168
	FR1 n30_Ant MIMO2	10M	BPSK	25	14	Bottom of Laptop	0mm	ON	462000	2310	SPEED	9.80	11.00	1.318	0.01	0.125	0.165
	FR1 n30_Ant MIMO2	10M	BPSK	1	1	Bottom Face	0mm	ON	462000	2310	SPEED	9.81	11.00	1.315	-0.08	0.630	0.829
	FR1 n30_Ant MIMO2	10M	BPSK	25	14	Bottom Face	0mm	ON	462000	2310	SPEED	9.80	11.00	1.318	0.1	0.624	0.823
	FR1 n30_Ant MIMO2	10M	BPSK	50	0	Bottom Face	0mm	ON	462000	2310	SPEED	9.80	11.00	1.318	-0.18	0.629	0.829
	FR1 n30_Ant MIMO2	10M	BPSK	1	1	Edge 1	0mm	ON	462000	2310	SPEED	9.81	11.00	1.315	0.1	0.011	0.014
	FR1 n30_Ant MIMO2	10M	BPSK	25	14	Edge 1	0mm	ON	462000	2310	SPEED	9.80	11.00	1.318	0.12	0.010	0.013
	FR1 n30_Ant MIMO2	10M	BPSK	1	1	Edge 4	0mm	ON	462000	2310	SPEED	9.81	11.00	1.315	0.08	0.575	0.756
	FR1 n30_Ant MIMO2	10M	BPSK	25	14	Edge 4	0mm	ON	462000	2310	SPEED	9.80	11.00	1.318	-0.17	0.569	0.750
23	FR1 n30_Ant MIMO2	10M	BPSK	1	1	Bottom Face	0mm	ON	462000	2310	SAA	9.81	11.00	1.315	0.11	0.814	1.071
	FR1 n30_Ant MIMO2	10M	BPSK	1	1	Bottom of Laptop	17mm	OFF	462000	2310	SPEED	21.74	23.00	1.337	-0.03	0.227	0.303
	FR1 n30_Ant MIMO2	10M	BPSK	25	14	Bottom of Laptop	17mm	OFF	462000	2310	SPEED	21.60	23.00	1.380	0.14	0.202	0.279
	FR1 n30_Ant MIMO2	10M	BPSK	1	1	Bottom Face	19mm	OFF	462000	2310	SPEED	21.74	23.00	1.337	0.18	0.306	0.409
	FR1 n30_Ant MIMO2	10M	BPSK	25	14	Bottom Face	19mm	OFF	462000	2310	SPEED	21.60	23.00	1.380	0.14	0.278	0.384
	FR1 n30_Ant MIMO2	10M	BPSK	1	1	Edge 1	22mm	OFF	462000	2310	SPEED	21.74	23.00	1.337	-0.17	0.001	0.001
	FR1 n30_Ant MIMO2	10M	BPSK	25	14	Edge 1	22mm	OFF	462000	2310	SPEED	21.60	23.00	1.380	0.17	0.001	0.001
	FR1 n30_Ant MIMO2	10M	BPSK	1	1	Edge 4	22mm	OFF	462000	2310	SPEED	21.74	23.00	1.337	-0.05	0.498	0.666
	FR1 n30_Ant MIMO2	10M	BPSK	25	14	Edge 4	22mm	OFF	462000	2310	SPEED	21.60	23.00	1.380	0.01	0.465	0.642



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Antenna Vendor	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	FR1 n41_Ant Main	100M	BPSK	1	1	Bottom of Laptop	0mm	ON	518598	2592.99	SPEED	7.81	9.00	1.315			0.1	0.123	0.162
	FR1 n41_Ant Main	100M	BPSK	135	0	Bottom of Laptop	0mm	ON	518598	2592.99	SPEED	7.76	9.00	1.330			-0.17	0.122	0.162
	FR1 n41_Ant Main	100M	BPSK	1	1	Bottom Face	0mm	ON	518598	2592.99	SPEED	7.81	9.00	1.315			-0.04	0.368	0.484
	FR1 n41_Ant Main	100M	BPSK	135	0	Bottom Face	0mm	ON	518598	2592.99	SPEED	7.76	9.00	1.330			0.04	0.356	0.474
	FR1 n41_Ant Main	100M	BPSK	1	1	Edge 1	0mm	ON	518598	2592.99	SPEED	7.81	9.00	1.315			-0.08	0.094	0.124
	FR1 n41_Ant Main	100M	BPSK	135	0	Edge 1	0mm	ON	518598	2592.99	SPEED	7.76	9.00	1.330			0.05	0.093	0.124
	FR1 n41_Ant Main	100M	BPSK	1	1	Edge 2	0mm	ON	518598	2592.99	SPEED	7.81	9.00	1.315			0.06	0.362	0.476
	FR1 n41_Ant Main	100M	BPSK	135	0	Edge 2	0mm	ON	518598	2592.99	SPEED	7.76	9.00	1.330			-0.09	0.359	0.478
	FR1 n41_HPUE_Ant Main	100M	BPSK	1	1	Bottom Face	0mm	ON	518598	2592.99	SPEED	10.56	12.00	1.393	50	1.000	-0.08	0.317	0.442
	FR1 n41_Ant Main	100M	BPSK	1	1	Bottom Face	0mm	ON	518598	2592.99	SAA	7.81	9.00	1.315			0.13	0.346	0.455
	FR1 n41_Ant Main	100M	BPSK	1	1	Bottom of Laptop	25mm	OFF	518598	2592.99	SPEED	23.30	25.00	1.479			0.12	0.166	0.246
	FR1 n41_Ant Main	100M	BPSK	135	69	Bottom of Laptop	25mm	OFF	518598	2592.99	SPEED	23.16	25.00	1.528			0.03	0.160	0.244
	FR1 n41_Ant Main	100M	BPSK	1	1	Bottom Face	25mm	OFF	518598	2592.99	SPEED	23.30	25.00	1.479			-0.1	0.203	0.300
	FR1 n41_Ant Main	100M	BPSK	135	69	Bottom Face	25mm	OFF	518598	2592.99	SPEED	23.16	25.00	1.528			0.07	0.240	0.367
	FR1 n41_Ant Main	100M	BPSK	1	1	Edge 1	24mm	OFF	518598	2592.99	SPEED	23.30	25.00	1.479			0.18	0.217	0.321
	FR1 n41_Ant Main	100M	BPSK	135	69	Edge 1	24mm	OFF	518598	2592.99	SPEED	23.16	25.00	1.528			-0.1	0.269	0.411
	FR1 n41_Ant Main	100M	BPSK	1	1	Edge 2	12mm	OFF	518598	2592.99	SPEED	23.30	25.00	1.479			0.01	0.100	0.148
	FR1 n41_Ant Main	100M	BPSK	135	69	Edge 2	12mm	OFF	518598	2592.99	SPEED	23.16	25.00	1.528			-0.15	0.134	0.205
	FR1 n41_Ant MIMO1	100M	BPSK	1	1	Bottom of Laptop	0mm	OFF	518598	2592.99	SPEED	7.88	9.00	1.294			0.19	0.108	0.140
	FR1 n41_Ant MIMO1	100M	BPSK	135	0	Bottom of Laptop	0mm	OFF	518598	2592.99	SPEED	7.86	9.00	1.300			0.07	0.101	0.131
	FR1 n41_Ant MIMO1	100M	BPSK	1	1	Bottom Face	0mm	OFF	518598	2592.99	SPEED	7.88	9.00	1.294			-0.03	0.672	0.870
	FR1 n41_Ant MIMO1	100M	BPSK	135	0	Bottom Face	0mm	OFF	518598	2592.99	SPEED	7.86	9.00	1.300			-0.18	0.628	0.817
	FR1 n41_Ant MIMO1	100M	BPSK	270	0	Bottom Face	0mm	OFF	518598	2592.99	SPEED	7.74	9.00	1.337			0.03	0.634	0.847
	FR1 n41_Ant MIMO1	100M	BPSK	1	1	Edge 2	0mm	OFF	518598	2592.99	SPEED	7.88	9.00	1.294			0.11	0.579	0.749
	FR1 n41_Ant MIMO1	100M	BPSK	135	0	Edge 2	0mm	OFF	518598	2592.99	SPEED	7.86	9.00	1.300			-0.08	0.541	0.703
	FR1 n41_HPUE_Ant MIMO1	100M	BPSK	1	1	Bottom Face	0mm	OFF	518598	2592.99	SPEED	10.77	12.00	1.327	50	1.000	-0.04	0.597	0.792
	FR1 n41_Ant MIMO1	100M	BPSK	1	1	Bottom Face	0mm	OFF	518598	2592.99	SAA	7.88	9.00	1.294			-0.01	0.706	0.914
	FR1 n41_HPUE_Ant MIMO1	100M	BPSK	1	1	Bottom Face	0mm	OFF	518598	2592.99	SAA	10.77	12.00	1.327	50	1.000	-0.04	0.627	0.832



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Antenna	Power Reduction	Ch.	Freq. (MHz)	Antenna Vendor	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	FR1 n41_Ant MIMO2	100M	BPSK	1	1	Bottom of Laptop	0mm	MIMO2	ON	518598	2592.99	SPEED	8.81	9.00	1.045			0.08	0.101	0.106
	FR1 n41_Ant MIMO2	100M	BPSK	135	0	Bottom of Laptop	0mm	MIMO2	ON	518598	2592.99	SPEED	8.75	9.00	1.059			0.01	0.094	0.100
	FR1 n41_Ant MIMO2	100M	BPSK	1	1	Bottom Face	0mm	MIMO2	ON	518598	2592.99	SPEED	8.81	9.00	1.045			0.03	0.934	0.976
	FR1 n41_Ant MIMO2	100M	BPSK	135	0	Bottom Face	0mm	MIMO2	ON	518598	2592.99	SPEED	8.75	9.00	1.059			0.03	0.873	0.925
	FR1 n41_Ant MIMO2	100M	BPSK	270	0	Bottom Face	0mm	MIMO2	ON	518598	2592.99	SPEED	8.80	9.00	1.047			-0.08	0.881	0.923
	FR1 n41_Ant MIMO2	100M	BPSK	1	1	Edge 1	0mm	MIMO2	ON	518598	2592.99	SPEED	8.81	9.00	1.045			-0.08	0.007	0.007
	FR1 n41_Ant MIMO2	100M	BPSK	135	0	Edge 1	0mm	MIMO2	ON	518598	2592.99	SPEED	8.75	9.00	1.059			0.1	0.006	0.006
	FR1 n41_Ant MIMO2	100M	BPSK	1	1	Edge 3	0mm	MIMO2	ON	518598	2592.99	SPEED	8.81	9.00	1.045			0	0.001	0.001
	FR1 n41_Ant MIMO2	100M	BPSK	135	0	Edge 3	0mm	MIMO2	ON	518598	2592.99	SPEED	8.75	9.00	1.059			0	0.001	0.001
24	FR1 n41_Ant MIMO2	100M	BPSK	1	1	Edge 4	0mm	MIMO2	ON	518598	2592.99	SPEED	8.81	9.00	1.045			0.15	1.050	1.097
	FR1 n41_Ant MIMO2	100M	BPSK	135	0	Edge 4	0mm	MIMO2	ON	518598	2592.99	SPEED	8.75	9.00	1.059			-0.18	0.981	1.039
	FR1 n41_Ant MIMO2	100M	BPSK	270	0	Edge 4	0mm	MIMO2	ON	518598	2592.99	SPEED	8.80	9.00	1.047			0.1	0.990	1.037
	FR1 n41_HPUE_Ant MIMO2	100M	BPSK	1	1	Edge 4	0mm	MIMO2	ON	518598	2592.99	SPEED	11.57	12.00	1.104	50	1.000	0.12	0.923	1.019
	FR1 n41_Ant MIMO2	100M	BPSK	1	1	Edge 4	0mm	MIMO2	ON	518598	2592.99	SAA	8.81	9.00	1.045			0.08	0.922	0.963
	FR1 n41_Ant MIMO2	100M	BPSK	1	1	Bottom of Laptop	17mm	MIMO2	OFF	518598	2592.99	SPEED	22.94	24.00	1.276			-0.17	0.195	0.249
	FR1 n41_Ant MIMO2	100M	BPSK	135	69	Bottom of Laptop	17mm	MIMO2	OFF	518598	2592.99	SPEED	22.79	24.00	1.321			-0.03	0.155	0.205
	FR1 n41_Ant MIMO2	100M	BPSK	1	1	Bottom Face	19mm	MIMO2	OFF	518598	2592.99	SPEED	22.94	24.00	1.276			-0.05	0.348	0.444
	FR1 n41_Ant MIMO2	100M	BPSK	135	69	Bottom Face	19mm	MIMO2	OFF	518598	2592.99	SPEED	22.79	24.00	1.321			0.18	0.278	0.367
	FR1 n41_Ant MIMO2	100M	BPSK	1	1	Edge 1	22mm	MIMO2	OFF	518598	2592.99	SPEED	22.94	24.00	1.276			0.14	0.041	0.052
	FR1 n41_Ant MIMO2	100M	BPSK	135	69	Edge 1	22mm	MIMO2	OFF	518598	2592.99	SPEED	22.79	24.00	1.321			-0.17	0.033	0.044
	FR1 n41_Ant MIMO2	100M	BPSK	1	1	Edge 4	22mm	MIMO2	OFF	518598	2592.99	SPEED	22.94	24.00	1.276			0.17	0.337	0.430
	FR1 n41_Ant MIMO2	100M	BPSK	135	69	Edge 4	22mm	MIMO2	OFF	518598	2592.99	SPEED	22.79	24.00	1.321			-0.05	0.269	0.355
	FR1 n41_Ant Aux	100M	BPSK	1	1	Bottom of Laptop	0mm	Aux	ON	518598	2592.99	SPEED	7.90	9.00	1.288			0.12	0.122	0.157
	FR1 n41_Ant Aux	100M	BPSK	135	0	Bottom of Laptop	0mm	Aux	ON	518598	2592.99	SPEED	7.80	9.00	1.318			-0.17	0.113	0.149
	FR1 n41_Ant Aux	100M	BPSK	1	1	Bottom Face	0mm	Aux	ON	518598	2592.99	SPEED	7.90	9.00	1.288			0	0.460	0.593
	FR1 n41_Ant Aux	100M	BPSK	135	0	Bottom Face	0mm	Aux	ON	518598	2592.99	SPEED	7.80	9.00	1.318			-0.17	0.428	0.564
	FR1 n41_Ant Aux	100M	BPSK	1	1	Edge 1	0mm	Aux	ON	518598	2592.99	SPEED	7.90	9.00	1.288			0.02	0.070	0.090
	FR1 n41_Ant Aux	100M	BPSK	135	0	Edge 1	0mm	Aux	ON	518598	2592.99	SPEED	7.80	9.00	1.318			-0.07	0.065	0.086
	FR1 n41_Ant Aux	100M	BPSK	1	1	Edge 4	0mm	Aux	ON	518598	2592.99	SPEED	7.90	9.00	1.288			-0.03	0.037	0.048
	FR1 n41_Ant Aux	100M	BPSK	135	0	Edge 4	0mm	Aux	ON	518598	2592.99	SPEED	7.80	9.00	1.318			0	0.035	0.046
	FR1 n41_HPUE_Ant Aux	100M	BPSK	1	1	Bottom Face	0mm	Aux	ON	518598	2592.99	SPEED	10.90	12.00	1.288	50	1.000	0.09	0.429	0.553
	FR1 n41_Ant Aux	100M	BPSK	1	1	Bottom Face	0mm	Aux	ON	518598	2592.99	SAA	7.90	9.00	1.288			-0.02	0.432	0.557
	FR1 n41_Ant Aux	100M	BPSK	1	1	Bottom of Laptop	25mm	Aux	OFF	518598	2592.99	SPEED	24.38	25.00	1.153			-0.16	0.160	0.185
	FR1 n41_Ant Aux	100M	BPSK	135	69	Bottom of Laptop	25mm	Aux	OFF	518598	2592.99	SPEED	24.20	25.00	1.202			-0.03	0.154	0.185
	FR1 n41_Ant Aux	100M	BPSK	1	1	Bottom Face	25mm	Aux	OFF	518598	2592.99	SPEED	24.38	25.00	1.153			0.03	0.157	0.181
	FR1 n41_Ant Aux	100M	BPSK	135	69	Bottom Face	25mm	Aux	OFF	518598	2592.99	SPEED	24.20	25.00	1.202			0.06	0.147	0.177
	FR1 n41_Ant Aux	100M	BPSK	1	1	Edge 1	22mm	Aux	OFF	518598	2592.99	SPEED	24.38	25.00	1.153			0.12	0.211	0.243
	FR1 n41_Ant Aux	100M	BPSK	135	69	Edge 1	22mm	Aux	OFF	518598	2592.99	SPEED	24.20	25.00	1.202			-0.03	0.173	0.208
	FR1 n41_Ant Aux	100M	BPSK	1	1	Edge 4	25mm	Aux	OFF	518598	2592.99	SPEED	24.38	25.00	1.153			0.11	0.047	0.054
	FR1 n41_Ant Aux	100M	BPSK	135	69	Edge 4	25mm	Aux	OFF	518598	2592.99	SPEED	24.20	25.00	1.202			0.08	0.044	0.053



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Antenna Vendor	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	FR1 n48_Ant Main	40M	BPSK	1	1	Bottom of Laptop	0mm	ON	641666	3624.99	SPEED	8.10	8.50	1.096	0.01	0.051	0.056
	FR1 n48_Ant Main	40M	BPSK	50	0	Bottom of Laptop	0mm	ON	641666	3624.99	SPEED	8.04	8.50	1.112	0.1	0.049	0.054
	FR1 n48_Ant Main	40M	BPSK	1	1	Bottom Face	0mm	ON	641666	3624.99	SPEED	8.10	8.50	1.096	-0.01	0.549	0.602
	FR1 n48_Ant Main	40M	BPSK	1	1	Bottom Face	0mm	ON	638000	3570	SPEED	8.04	8.50	1.112	0.03	0.619	0.688
	FR1 n48_Ant Main	40M	BPSK	1	1	Bottom Face	0mm	ON	645332	3679.98	SPEED	7.89	8.50	1.151	-0.08	0.509	0.586
	FR1 n48_Ant Main	40M	BPSK	50	0	Bottom Face	0mm	ON	641666	3624.99	SPEED	8.04	8.50	1.112	0.05	0.535	0.595
	FR1 n48_Ant Main	40M	BPSK	1	1	Edge 1	0mm	ON	641666	3624.99	SPEED	8.10	8.50	1.096	-0.09	0.092	0.101
	FR1 n48_Ant Main	40M	BPSK	50	0	Edge 1	0mm	ON	641666	3624.99	SPEED	8.04	8.50	1.112	-0.08	0.090	0.100
	FR1 n48_Ant Main	40M	BPSK	1	1	Edge 2	0mm	ON	641666	3624.99	SPEED	8.10	8.50	1.096	0.13	0.140	0.154
	FR1 n48_Ant Main	40M	BPSK	50	0	Edge 2	0mm	ON	641666	3624.99	SPEED	8.04	8.50	1.112	0.12	0.137	0.152
	FR1 n48_Ant Main	40M	BPSK	1	1	Bottom Face	0mm	ON	638000	3570	SAA	8.04	8.50	1.112	0.03	0.428	0.476
	FR1 n48_Ant Main	40M	BPSK	1	1	Bottom of Laptop	25mm	OFF	645332	3679.98	SPEED	21.48	22.00	1.127	0.18	0.045	0.051
	FR1 n48_Ant Main	40M	BPSK	50	28	Bottom of Laptop	25mm	OFF	645332	3679.98	SPEED	21.30	22.00	1.175	0.16	0.044	0.052
	FR1 n48_Ant Main	40M	BPSK	1	1	Bottom Face	25mm	OFF	645332	3679.98	SPEED	21.48	22.00	1.127	0.18	0.108	0.122
	FR1 n48_Ant Main	40M	BPSK	50	28	Bottom Face	25mm	OFF	645332	3679.98	SPEED	21.30	22.00	1.175	-0.1	0.084	0.099
	FR1 n48_Ant Main	40M	BPSK	1	1	Edge 1	24mm	OFF	645332	3679.98	SPEED	21.48	22.00	1.127	0.01	0.121	0.136
	FR1 n48_Ant Main	40M	BPSK	50	28	Edge 1	24mm	OFF	645332	3679.98	SPEED	21.30	22.00	1.175	-0.15	0.084	0.099
	FR1 n48_Ant Main	40M	BPSK	1	1	Edge 2	12mm	OFF	645332	3679.98	SPEED	21.48	22.00	1.127	0.19	0.076	0.086
	FR1 n48_Ant Main	40M	BPSK	50	28	Edge 2	12mm	OFF	645332	3679.98	SPEED	21.30	22.00	1.175	0.07	0.068	0.080
	FR1 n48_Ant MIMO2	40M	BPSK	1	1	Bottom of Laptop	0mm	ON	641666	3624.99	SPEED	7.91	8.50	1.146	-0.15	0.061	0.070
	FR1 n48_Ant MIMO2	40M	BPSK	50	0	Bottom of Laptop	0mm	ON	641666	3624.99	SPEED	7.65	8.50	1.216	-0.15	0.060	0.073
	FR1 n48_Ant MIMO2	40M	BPSK	1	1	Bottom Face	0mm	ON	641666	3624.99	SPEED	7.91	8.50	1.146	-0.17	0.687	0.787
	FR1 n48_Ant MIMO2	40M	BPSK	1	1	Bottom Face	0mm	ON	638000	3570	SPEED	7.76	8.50	1.186	-0.08	0.626	0.742
	FR1 n48_Ant MIMO2	40M	BPSK	1	1	Bottom Face	0mm	ON	645332	3679.98	SPEED	7.68	8.50	1.208	-0.04	0.626	0.756
	FR1 n48_Ant MIMO2	40M	BPSK	50	0	Bottom Face	0mm	ON	641666	3624.99	SPEED	7.65	8.50	1.216	-0.08	0.642	0.781
	FR1 n48_Ant MIMO2	40M	BPSK	50	0	Bottom Face	0mm	ON	638000	3570	SPEED	7.44	8.50	1.276	0.17	0.585	0.747
	FR1 n48_Ant MIMO2	40M	BPSK	50	0	Bottom Face	0mm	ON	645332	3679.98	SPEED	7.42	8.50	1.282	0.18	0.585	0.750
	FR1 n48_Ant MIMO2	40M	BPSK	1	1	Edge 1	0mm	ON	641666	3624.99	SPEED	7.91	8.50	1.146	-0.08	0.019	0.022
	FR1 n48_Ant MIMO2	40M	BPSK	50	0	Edge 1	0mm	ON	641666	3624.99	SPEED	7.65	8.50	1.216	-0.13	0.018	0.022
	FR1 n48_Ant MIMO2	40M	BPSK	1	1	Edge 4	0mm	ON	641666	3624.99	SPEED	7.91	8.50	1.146	-0.13	0.820	0.939
	FR1 n48_Ant MIMO2	40M	BPSK	1	1	Edge 4	0mm	ON	638000	3570	SPEED	7.76	8.50	1.186	-0.05	0.886	1.051
	FR1 n48_Ant MIMO2	40M	BPSK	1	1	Edge 4	0mm	ON	645332	3679.98	SPEED	7.68	8.50	1.208	0.06	0.797	0.963
	FR1 n48_Ant MIMO2	40M	BPSK	50	0	Edge 4	0mm	ON	641666	3624.99	SPEED	7.65	8.50	1.216	-0.03	0.783	0.952
	FR1 n48_Ant MIMO2	40M	BPSK	50	0	Edge 4	0mm	ON	638000	3570	SPEED	7.44	8.50	1.276	-0.03	0.816	1.042
	FR1 n48_Ant MIMO2	40M	BPSK	50	0	Edge 4	0mm	ON	645332	3679.98	SPEED	7.42	8.50	1.282	0.08	0.761	0.976
	FR1 n48_Ant MIMO2	40M	BPSK	100	0	Edge 4	0mm	ON	641666	3624.99	SPEED	7.60	8.50	1.230	-0.07	0.772	0.950
	FR1 n48_Ant MIMO2	40M	BPSK	1	1	Edge 4	0mm	ON	638000	3570	SAA	7.76	8.50	1.186	0.05	0.831	0.985
	FR1 n48_Ant MIMO2	40M	BPSK	1	1	Edge 4	0mm	ON	641666	3624.99	SAA	7.91	8.50	1.146	0.08	0.769	0.881
	FR1 n48_Ant MIMO2	40M	BPSK	1	1	Edge 4	0mm	ON	645332	3679.98	SAA	7.68	8.50	1.208	0.01	0.748	0.903
	FR1 n48_Ant MIMO2	40M	BPSK	1	1	Bottom of Laptop	17mm	OFF	638000	3570	SPEED	20.33	22.00	1.469	-0.11	0.113	0.166
	FR1 n48_Ant MIMO2	40M	BPSK	50	28	Bottom of Laptop	17mm	OFF	638000	3570	SPEED	20.23	22.00	1.503	-0.12	0.105	0.158
	FR1 n48_Ant MIMO2	40M	BPSK	1	1	Bottom Face	19mm	OFF	638000	3570	SPEED	20.33	22.00	1.469	-0.02	0.243	0.357
	FR1 n48_Ant MIMO2	40M	BPSK	50	28	Bottom Face	19mm	OFF	638000	3570	SPEED	20.23	22.00	1.503	0.15	0.225	0.338
	FR1 n48_Ant MIMO2	40M	BPSK	1	1	Edge 1	22mm	OFF	638000	3570	SPEED	20.33	22.00	1.469	-0.09	0.045	0.066
	FR1 n48_Ant MIMO2	40M	BPSK	50	28	Edge 1	22mm	OFF	638000	3570	SPEED	20.23	22.00	1.503	0.11	0.042	0.063
	FR1 n48_Ant MIMO2	40M	BPSK	1	1	Edge 4	22mm	OFF	638000	3570	SPEED	20.33	22.00	1.469	-0.05	0.420	0.617
	FR1 n48_Ant MIMO2	40M	BPSK	1	1	Edge 4	22mm	OFF	641666	3624.99	SPEED	20.18	22.00	1.521	-0.08	0.378	0.575
	FR1 n48_Ant MIMO2	40M	BPSK	1	1	Edge 4	22mm	OFF	645332	3679.98	SPEED	20.16	22.00	1.528	-0.17	0.371	0.567
	FR1 n48_Ant MIMO2	40M	BPSK	50	28	Edge 4	22mm	OFF	638000	3570	SPEED	20.23	22.00	1.503	-0.08	0.390	0.586



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Antenna Vendor	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	FR1 n48_Ant Aux	40M	BPSK	1	1	Bottom of Laptop	0mm	ON	641666	3624.99	SPEED	8.17	8.50	1.079	0.02	0.108	0.117
	FR1 n48_Ant Aux	40M	BPSK	50	0	Bottom of Laptop	0mm	ON	641666	3624.99	SPEED	8.06	8.50	1.107	0.16	0.088	0.097
	FR1 n48_Ant Aux	40M	BPSK	1	1	Bottom Face	0mm	ON	641666	3624.99	SPEED	8.17	8.50	1.079	-0.03	0.909	0.981
	FR1 n48_Ant Aux	40M	BPSK	1	1	Bottom Face	0mm	ON	638000	3570	SPEED	7.89	8.50	1.151	-0.15	0.814	0.937
25	FR1 n48_Ant Aux	40M	BPSK	1	1	Bottom Face	0mm	ON	645332	3679.98	SPEED	7.87	8.50	1.156	0.01	0.943	1.090
	FR1 n48_Ant Aux	40M	BPSK	50	0	Bottom Face	0mm	ON	641666	3624.99	SPEED	8.06	8.50	1.107	-0.06	0.798	0.883
	FR1 n48_Ant Aux	40M	BPSK	50	0	Bottom Face	0mm	ON	638000	3570	SPEED	7.78	8.50	1.180	0.07	0.804	0.949
	FR1 n48_Ant Aux	40M	BPSK	50	0	Bottom Face	0mm	ON	645332	3679.98	SPEED	7.66	8.50	1.213	0.11	0.896	1.087
	FR1 n48_Ant Aux	40M	BPSK	100	0	Bottom Face	0mm	ON	641666	3624.99	SPEED	8.03	8.50	1.114	-0.18	0.715	0.797
	FR1 n48_Ant Aux	40M	BPSK	1	1	Edge 1	0mm	ON	641666	3624.99	SPEED	8.17	8.50	1.079	0.11	0.133	0.143
	FR1 n48_Ant Aux	40M	BPSK	50	0	Edge 1	0mm	ON	641666	3624.99	SPEED	8.06	8.50	1.107	-0.01	0.117	0.129
	FR1 n48_Ant Aux	40M	BPSK	1	1	Edge 4	0mm	ON	641666	3624.99	SPEED	8.17	8.50	1.079	-0.11	0.088	0.095
	FR1 n48_Ant Aux	40M	BPSK	50	0	Edge 4	0mm	ON	641666	3624.99	SPEED	8.06	8.50	1.107	0.04	0.079	0.087
	FR1 n48_Ant Aux	40M	BPSK	1	1	Bottom Face	0mm	ON	645332	3679.98	SAA	7.87	8.50	1.156	0.16	0.889	1.028
	FR1 n48_Ant Aux	40M	BPSK	1	1	Bottom Face	0mm	ON	641666	3624.99	SAA	8.17	8.50	1.079	0.08	0.857	0.925
	FR1 n48_Ant Aux	40M	BPSK	1	1	Bottom Face	0mm	ON	638000	3570	SAA	7.89	8.50	1.151	0.01	0.767	0.883
	FR1 n48_Ant Aux	40M	BPSK	1	1	Bottom of Laptop	25mm	OFF	638000	3570	SPEED	20.87	22.00	1.297	0.17	0.044	0.057
	FR1 n48_Ant Aux	40M	BPSK	50	28	Bottom of Laptop	25mm	OFF	638000	3570	SPEED	20.81	22.00	1.315	0.06	0.050	0.066
	FR1 n48_Ant Aux	40M	BPSK	1	1	Bottom Face	25mm	OFF	638000	3570	SPEED	20.87	22.00	1.297	0.18	0.109	0.141
	FR1 n48_Ant Aux	40M	BPSK	50	28	Bottom Face	25mm	OFF	638000	3570	SPEED	20.81	22.00	1.315	-0.19	0.117	0.154
	FR1 n48_Ant Aux	40M	BPSK	1	1	Edge 1	22mm	OFF	638000	3570	SPEED	20.87	22.00	1.297	0.17	0.074	0.096
	FR1 n48_Ant Aux	40M	BPSK	50	28	Edge 1	22mm	OFF	638000	3570	SPEED	20.81	22.00	1.315	-0.16	0.085	0.112
	FR1 n48_Ant Aux	40M	BPSK	1	1	Edge 4	25mm	OFF	638000	3570	SPEED	20.87	22.00	1.297	-0.08	0.001	0.001
	FR1 n48_Ant Aux	40M	BPSK	50	28	Edge 4	25mm	OFF	638000	3570	SPEED	20.81	22.00	1.315	0.03	0.001	0.001
	FR1 n66_Ant Main	40M	BPSK	1	1	Bottom of Laptop	0mm	ON	349000	1745	SPEED	14.65	15.50	1.216	0.03	0.435	0.529
	FR1 n66_Ant Main	40M	BPSK	108	54	Bottom of Laptop	0mm	ON	349000	1745	SPEED	14.57	15.50	1.239	-0.08	0.417	0.517
	FR1 n66_Ant Main	40M	BPSK	1	1	Bottom Face	0mm	ON	349000	1745	SPEED	14.65	15.50	1.216	-0.18	0.949	1.154
	FR1 n66_Ant Main	40M	BPSK	108	54	Bottom Face	0mm	ON	349000	1745	SPEED	14.57	15.50	1.239	0.1	0.681	0.844
	FR1 n66_Ant Main	40M	BPSK	216	0	Bottom Face	0mm	ON	349000	1745	SPEED	14.52	15.50	1.253	0.12	0.682	0.855
	FR1 n66_Ant Main	40M	BPSK	1	1	Edge 1	0mm	ON	349000	1745	SPEED	14.65	15.50	1.216	0.08	0.428	0.521
	FR1 n66_Ant Main	40M	BPSK	108	54	Edge 1	0mm	ON	349000	1745	SPEED	14.57	15.50	1.239	-0.17	0.412	0.510
	FR1 n66_Ant Main	40M	BPSK	1	1	Edge 2	0mm	ON	349000	1745	SPEED	14.65	15.50	1.216	-0.03	0.415	0.505
	FR1 n66_Ant Main	40M	BPSK	108	54	Edge 2	0mm	ON	349000	1745	SPEED	14.57	15.50	1.239	0.14	0.399	0.494
26	FR1 n66_Ant Main	40M	BPSK	1	1	Bottom Face	0mm	ON	349000	1745	SAA	14.65	15.50	1.216	-0.05	0.969	1.178
	FR1 n66_Ant Main	40M	BPSK	1	1	Bottom of Laptop	25mm	OFF	349000	1745	SPEED	23.72	25.00	1.343	0.11	0.344	0.462
	FR1 n66_Ant Main	40M	BPSK	108	54	Bottom of Laptop	25mm	OFF	349000	1745	SPEED	23.70	25.00	1.349	-0.05	0.274	0.370
	FR1 n66_Ant Main	40M	BPSK	1	1	Bottom Face	25mm	OFF	349000	1745	SPEED	23.72	25.00	1.343	-0.17	0.327	0.439
	FR1 n66_Ant Main	40M	BPSK	108	54	Bottom Face	25mm	OFF	349000	1745	SPEED	23.70	25.00	1.349	0.17	0.260	0.351
	FR1 n66_Ant Main	40M	BPSK	1	1	Edge 1	24mm	OFF	349000	1745	SPEED	23.72	25.00	1.343	-0.05	0.258	0.346
	FR1 n66_Ant Main	40M	BPSK	108	54	Edge 1	24mm	OFF	349000	1745	SPEED	23.70	25.00	1.349	0.01	0.207	0.279
	FR1 n66_Ant Main	40M	BPSK	1	1	Edge 2	12mm	OFF	349000	1745	SPEED	23.72	25.00	1.343	0.1	0.138	0.185
	FR1 n66_Ant Main	40M	BPSK	108	54	Edge 2	12mm	OFF	349000	1745	SPEED	23.70	25.00	1.349	-0.17	0.113	0.152



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Antenna Vendor	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	FR1 n66_Ant MIMO2	40M	BPSK	1	1	Bottom of Laptop	0mm	ON	349000	1745	SPEED	12.60	13.00	1.096	0.04	0.299	0.328
	FR1 n66_Ant MIMO2	40M	BPSK	108	54	Bottom of Laptop	0mm	ON	349000	1745	SPEED	12.53	13.00	1.114	-0.01	0.295	0.329
	FR1 n66_Ant MIMO2	40M	BPSK	1	1	Bottom Face	0mm	ON	349000	1745	SPEED	12.60	13.00	1.096	-0.06	0.923	1.012
	FR1 n66_Ant MIMO2	40M	BPSK	108	54	Bottom Face	0mm	ON	349000	1745	SPEED	12.53	13.00	1.114	0.06	0.899	1.002
	FR1 n66_Ant MIMO2	40M	BPSK	216	0	Bottom Face	0mm	ON	349000	1745	SPEED	12.40	13.00	1.148	-0.09	0.871	1.000
	FR1 n66_Ant MIMO2	40M	BPSK	1	1	Edge 1	0mm	ON	349000	1745	SPEED	12.60	13.00	1.096	-0.08	0.013	0.014
	FR1 n66_Ant MIMO2	40M	BPSK	108	54	Edge 1	0mm	ON	349000	1745	SPEED	12.53	13.00	1.114	0.13	0.013	0.014
	FR1 n66_Ant MIMO2	40M	BPSK	1	1	Edge 4	0mm	ON	349000	1745	SPEED	12.60	13.00	1.096	0.12	0.552	0.605
	FR1 n66_Ant MIMO2	40M	BPSK	108	54	Edge 4	0mm	ON	349000	1745	SPEED	12.53	13.00	1.114	0.03	0.544	0.606
	FR1 n66_Ant MIMO2	40M	BPSK	1	1	Bottom Face	0mm	ON	349000	1745	SAA	12.60	13.00	1.096	0.16	0.864	0.947
	FR1 n66_Ant MIMO2	40M	BPSK	1	1	Bottom of Laptop	17mm	OFF	349000	1745	SPEED	22.83	24.00	1.309	-0.1	0.254	0.333
	FR1 n66_Ant MIMO2	40M	BPSK	108	54	Bottom of Laptop	17mm	OFF	349000	1745	SPEED	22.78	24.00	1.324	0.07	0.233	0.309
	FR1 n66_Ant MIMO2	40M	BPSK	1	1	Bottom Face	19mm	OFF	349000	1745	SPEED	22.83	24.00	1.309	0.01	0.247	0.323
	FR1 n66_Ant MIMO2	40M	BPSK	108	54	Bottom Face	19mm	OFF	349000	1745	SPEED	22.78	24.00	1.324	-0.15	0.210	0.278
	FR1 n66_Ant MIMO2	40M	BPSK	1	1	Edge 1	22mm	OFF	349000	1745	SPEED	22.83	24.00	1.309	0.19	0.001	0.001
	FR1 n66_Ant MIMO2	40M	BPSK	108	54	Edge 1	22mm	OFF	349000	1745	SPEED	22.78	24.00	1.324	0.07	0.001	0.001
	FR1 n66_Ant MIMO2	40M	BPSK	1	1	Edge 4	22mm	OFF	349000	1745	SPEED	22.83	24.00	1.309	-0.18	0.267	0.350
	FR1 n66_Ant MIMO2	40M	BPSK	108	54	Edge 4	22mm	OFF	349000	1745	SPEED	22.78	24.00	1.324	0.03	0.219	0.290
	FR1 n71_Ant Main	20M	BPSK	1	1	Bottom of Laptop	0mm	ON	136100	680.5	SPEED	16.41	16.50	1.021	0.08	0.164	0.167
	FR1 n71_Ant Main	20M	BPSK	50	28	Bottom of Laptop	0mm	ON	136100	680.5	SPEED	16.30	16.50	1.047	0.01	0.159	0.166
	FR1 n71_Ant Main	20M	BPSK	1	1	Bottom Face	0mm	ON	136100	680.5	SPEED	16.41	16.50	1.021	-0.08	0.790	0.807
	FR1 n71_Ant Main	20M	BPSK	50	28	Bottom Face	0mm	ON	136100	680.5	SPEED	16.30	16.50	1.047	0.1	0.768	0.804
	FR1 n71_Ant Main	20M	BPSK	100	0	Bottom Face	0mm	ON	136100	680.5	SPEED	16.26	16.50	1.057	0.02	0.744	0.786
	FR1 n71_Ant Main	20M	BPSK	1	1	Edge 1	0mm	ON	136100	680.5	SPEED	16.41	16.50	1.021	-0.18	0.067	0.068
	FR1 n71_Ant Main	20M	BPSK	50	28	Edge 1	0mm	ON	136100	680.5	SPEED	16.30	16.50	1.047	0.1	0.065	0.068
27	FR1 n71_Ant Main	20M	BPSK	1	1	Edge 2	0mm	ON	136100	680.5	SPEED	16.41	16.50	1.021	-0.03	1.080	1.103
	FR1 n71_Ant Main	20M	BPSK	50	28	Edge 2	0mm	ON	136100	680.5	SPEED	16.30	16.50	1.047	0.01	1.050	1.099
	FR1 n71_Ant Main	20M	BPSK	100	0	Edge 2	0mm	ON	136100	680.5	SPEED	16.26	16.50	1.057	0.09	1.030	1.089
	FR1 n71_Ant Main	20M	BPSK	1	1	Edge 2	0mm	ON	136100	680.5	SAA	16.41	16.50	1.021	0.12	0.994	1.015
	FR1 n71_Ant Main	20M	BPSK	1	1	Bottom of Laptop	25mm	OFF	136100	680.5	SPEED	24.32	25.00	1.169	0.08	0.102	0.119
	FR1 n71_Ant Main	20M	BPSK	50	28	Bottom of Laptop	25mm	OFF	136100	680.5	SPEED	24.27	25.00	1.183	0.01	0.081	0.096
	FR1 n71_Ant Main	20M	BPSK	1	1	Bottom Face	25mm	OFF	136100	680.5	SPEED	24.32	25.00	1.169	-0.08	0.081	0.095
	FR1 n71_Ant Main	20M	BPSK	50	28	Bottom Face	25mm	OFF	136100	680.5	SPEED	24.27	25.00	1.183	0.1	0.063	0.075
	FR1 n71_Ant Main	20M	BPSK	1	1	Edge 1	24mm	OFF	136100	680.5	SPEED	24.32	25.00	1.169	-0.18	0.001	0.001
	FR1 n71_Ant Main	20M	BPSK	50	28	Edge 1	24mm	OFF	136100	680.5	SPEED	24.27	25.00	1.183	0.1	0.001	0.001
	FR1 n71_Ant Main	20M	BPSK	1	1	Edge 2	12mm	OFF	136100	680.5	SPEED	24.32	25.00	1.169	0.12	0.148	0.173
	FR1 n71_Ant Main	20M	BPSK	50	28	Edge 2	12mm	OFF	136100	680.5	SPEED	24.27	25.00	1.183	0.08	0.115	0.136



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Antenna Vendor	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	FR1 n77_Ant Main	100M	BPSK	1	1	Bottom of Laptop	0mm	ON	656000	3840	SPEED	7.35	8.00	1.161			0.08	0.070	0.081
	FR1 n77_Ant Main	100M	BPSK	135	0	Bottom of Laptop	0mm	ON	656000	3840	SPEED	7.31	8.00	1.172			0.01	0.062	0.073
	FR1 n77_Ant Main	100M	BPSK	1	1	Bottom Face	0mm	ON	656000	3840	SPEED	7.35	8.00	1.161			0.05	0.583	0.677
	FR1 n77_Ant Main	100M	BPSK	135	0	Bottom Face	0mm	ON	656000	3840	SPEED	7.31	8.00	1.172			0.03	0.519	0.608
	FR1 n77_Ant Main	100M	BPSK	1	1	Edge 1	0mm	ON	656000	3840	SPEED	7.35	8.00	1.161			-0.08	0.128	0.149
	FR1 n77_Ant Main	100M	BPSK	135	0	Edge 1	0mm	ON	656000	3840	SPEED	7.31	8.00	1.172			0.1	0.114	0.134
	FR1 n77_Ant Main	100M	BPSK	1	1	Edge 2	0mm	ON	656000	3840	SPEED	7.35	8.00	1.161			-0.18	0.231	0.268
	FR1 n77_Ant Main	100M	BPSK	135	0	Edge 2	0mm	ON	656000	3840	SPEED	7.31	8.00	1.172			0.1	0.206	0.241
	FR1 n77_HPUE_Ant Main	100M	BPSK	1	1	Bottom Face	0mm	ON	656000	3840	SPEED	10.42	11.00	1.143	50	1.000	0.12	0.559	0.639
	FR1 n77_Ant Main	100M	BPSK	1	1	Bottom Face	0mm	ON	656000	3840	SAA	7.35	8.00	1.161			0.08	0.498	0.578
	FR1 n77_Ant Main	100M	BPSK	1	1	Bottom of Laptop	25mm	OFF	656000	3840	SPEED	23.83	25.00	1.309			-0.17	0.130	0.170
	FR1 n77_Ant Main	100M	BPSK	135	69	Bottom of Laptop	25mm	OFF	656000	3840	SPEED	23.61	25.00	1.377			-0.03	0.123	0.169
	FR1 n77_Ant Main	100M	BPSK	1	1	Bottom Face	25mm	OFF	656000	3840	SPEED	23.83	25.00	1.309			-0.05	0.352	0.461
	FR1 n77_Ant Main	100M	BPSK	135	69	Bottom Face	25mm	OFF	656000	3840	SPEED	23.61	25.00	1.377			0.18	0.230	0.317
	FR1 n77_Ant Main	100M	BPSK	1	1	Edge 1	24mm	OFF	656000	3840	SPEED	23.83	25.00	1.309			0.14	0.194	0.254
	FR1 n77_Ant Main	100M	BPSK	135	69	Edge 1	24mm	OFF	656000	3840	SPEED	23.61	25.00	1.377			-0.17	0.191	0.263
	FR1 n77_Ant Main	100M	BPSK	1	1	Edge 2	12mm	OFF	656000	3840	SPEED	23.83	25.00	1.309			0.17	0.217	0.284
	FR1 n77_Ant Main	100M	BPSK	135	69	Edge 2	12mm	OFF	656000	3840	SPEED	23.61	25.00	1.377			-0.05	0.198	0.273
	FR1 n77_Ant MIMO1	100M	BPSK	1	1	Bottom of Laptop	0mm	OFF	656000	3840	SPEED	7.80	8.00	1.047			0.01	0.055	0.058
	FR1 n77_Ant MIMO1	100M	BPSK	135	0	Bottom of Laptop	0mm	OFF	656000	3840	SPEED	7.79	8.00	1.050			0.1	0.049	0.051
	FR1 n77_Ant MIMO1	100M	BPSK	1	1	Bottom Face	0mm	OFF	656000	3840	SPEED	7.80	8.00	1.047			-0.17	0.683	0.715
	FR1 n77_Ant MIMO1	100M	BPSK	135	0	Bottom Face	0mm	OFF	656000	3840	SPEED	7.79	8.00	1.050			0.04	0.608	0.638
	FR1 n77_Ant MIMO1	100M	BPSK	1	1	Edge 2	0mm	OFF	656000	3840	SPEED	7.80	8.00	1.047			-0.06	0.807	0.845
	FR1 n77_Ant MIMO1	100M	BPSK	135	0	Edge 2	0mm	OFF	656000	3840	SPEED	7.79	8.00	1.050			0.05	0.718	0.754
	FR1 n77_Ant MIMO1	100M	BPSK	270	0	Edge 2	0mm	OFF	656000	3840	SPEED	7.76	8.00	1.057			0.06	0.710	0.750
	FR1 n77_HPUE_Ant MIMO1	100M	BPSK	1	1	Edge 2	0mm	OFF	656000	3840	SPEED	10.99	11.00	1.002	50	1.000	-0.09	0.772	0.774
	FR1 n77_Ant MIMO1	100M	BPSK	1	1	Edge 2	0mm	OFF	656000	3840	SAA	7.80	8.00	1.047			-0.08	0.616	0.645
	FR1 n77_Ant MIMO2	100M	BPSK	1	1	Bottom of Laptop	0mm	ON	656000	3840	SPEED	7.31	8.00	1.172			0.13	0.056	0.066
	FR1 n77_Ant MIMO2	100M	BPSK	135	0	Bottom of Laptop	0mm	ON	656000	3840	SPEED	7.30	8.00	1.175			0.12	0.048	0.056
	FR1 n77_Ant MIMO2	100M	BPSK	1	1	Bottom Face	0mm	ON	656000	3840	SPEED	7.31	8.00	1.172			0.03	0.489	0.573
	FR1 n77_Ant MIMO2	100M	BPSK	135	0	Bottom Face	0mm	ON	656000	3840	SPEED	7.30	8.00	1.175			0.18	0.419	0.492
	FR1 n77_Ant MIMO2	100M	BPSK	1	1	Edge 1	0mm	ON	656000	3840	SPEED	7.31	8.00	1.172			0.16	0.012	0.014
	FR1 n77_Ant MIMO2	100M	BPSK	135	0	Edge 1	0mm	ON	656000	3840	SPEED	7.30	8.00	1.175			-0.1	0.010	0.012
	FR1 n77_Ant MIMO2	100M	BPSK	1	1	Edge 4	0mm	ON	656000	3840	SPEED	7.31	8.00	1.172			-0.06	0.659	0.772
	FR1 n77_Ant MIMO2	100M	BPSK	135	0	Edge 4	0mm	ON	656000	3840	SPEED	7.30	8.00	1.175			0.07	0.564	0.663
	FR1 n77_HPUE_Ant MIMO2	100M	BPSK	1	1	Edge 4	0mm	ON	656000	3840	SPEED	10.28	11.00	1.180	50	1.000	0.01	0.613	0.724
	FR1 n77_Ant MIMO2	100M	BPSK	1	1	Edge 4	0mm	ON	656000	3840	SAA	7.31	8.00	1.172			0.19	0.543	0.637
	FR1 n77_Ant MIMO2	100M	BPSK	1	1	Bottom of Laptop	17mm	OFF	656000	3840	SPEED	23.26	25.00	1.493			0.07	0.376	0.561
	FR1 n77_Ant MIMO2	100M	BPSK	135	69	Bottom of Laptop	17mm	OFF	656000	3840	SPEED	23.21	25.00	1.510			-0.18	0.369	0.557
	FR1 n77_Ant MIMO2	100M	BPSK	1	1	Bottom Face	19mm	OFF	656000	3840	SPEED	23.26	25.00	1.493			-0.15	0.281	0.419
	FR1 n77_Ant MIMO2	100M	BPSK	135	69	Bottom Face	19mm	OFF	656000	3840	SPEED	23.21	25.00	1.510			0.11	0.226	0.341
	FR1 n77_Ant MIMO2	100M	BPSK	1	1	Edge 1	22mm	OFF	656000	3840	SPEED	23.26	25.00	1.493			-0.08	0.092	0.137
	FR1 n77_Ant MIMO2	100M	BPSK	135	69	Edge 1	22mm	OFF	656000	3840	SPEED	23.21	25.00	1.510			-0.17	0.083	0.125
	FR1 n77_Ant MIMO2	100M	BPSK	1	1	Edge 4	22mm	OFF	656000	3840	SPEED	23.26	25.00	1.493			-0.08	0.424	0.633
	FR1 n77_Ant MIMO2	100M	BPSK	135	69	Edge 4	22mm	OFF	656000	3840	SPEED	23.21	25.00	1.510			-0.04	0.341	0.515



FCC SAR TEST REPORT

Report No. : FA3O1305

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Antenna Vendor	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	FR1 n77_Ant Aux	100M	BPSK	1	1	Bottom of Laptop	0mm	ON	656000	3840	SPEED	7.46	8.00	1.132			0.17	0.058	0.066
	FR1 n77_Ant Aux	100M	BPSK	135	0	Bottom of Laptop	0mm	ON	656000	3840	SPEED	7.43	8.00	1.140			0.18	0.051	0.058
	FR1 n77_Ant Aux	100M	BPSK	1	1	Bottom Face	0mm	ON	656000	3840	SPEED	7.46	8.00	1.132			-0.04	0.885	1.002
	FR1 n77_Ant Aux	100M	BPSK	135	0	Bottom Face	0mm	ON	656000	3840	SPEED	7.43	8.00	1.140			-0.04	0.780	0.889
	FR1 n77_Ant Aux	100M	BPSK	270	0	Bottom Face	0mm	ON	656000	3840	SPEED	7.36	8.00	1.159			-0.08	0.786	0.911
	FR1 n77_Ant Aux	100M	BPSK	1	1	Edge 1	0mm	ON	656000	3840	SPEED	7.46	8.00	1.132			-0.13	0.061	0.069
	FR1 n77_Ant Aux	100M	BPSK	135	0	Edge 1	0mm	ON	656000	3840	SPEED	7.43	8.00	1.140			-0.13	0.054	0.062
	FR1 n77_Ant Aux	100M	BPSK	1	1	Edge 4	0mm	ON	656000	3840	SPEED	7.46	8.00	1.132			0.06	0.114	0.129
	FR1 n77_Ant Aux	100M	BPSK	135	0	Edge 4	0mm	ON	656000	3840	SPEED	7.43	8.00	1.140			-0.03	0.101	0.115
	FR1 n77_HPUE_Ant Aux	100M	BPSK	1	1	Bottom Face	0mm	ON	656000	3840	SPEED	10.46	11.00	1.132	50	1.000	-0.03	0.805	0.912
	FR1 n77_Ant Aux	100M	BPSK	1	1	Bottom Face	0mm	ON	656000	3840	SAA	7.46	8.00	1.132			0.08	0.835	0.946
	FR1 n77_Ant Aux	100M	BPSK	1	1	Bottom of Laptop	25mm	OFF	656000	3840	SPEED	24.73	25.00	1.064			-0.07	0.118	0.126
	FR1 n77_Ant Aux	100M	BPSK	135	69	Bottom of Laptop	25mm	OFF	656000	3840	SPEED	24.49	25.00	1.125			0.05	0.105	0.118
	FR1 n77_Ant Aux	100M	BPSK	1	1	Bottom Face	25mm	OFF	656000	3840	SPEED	24.73	25.00	1.064			0.03	0.286	0.304
	FR1 n77_Ant Aux	100M	BPSK	135	69	Bottom Face	25mm	OFF	656000	3840	SPEED	24.49	25.00	1.125			-0.16	0.234	0.263
	FR1 n77_Ant Aux	100M	BPSK	1	1	Edge 1	22mm	OFF	656000	3840	SPEED	24.73	25.00	1.064			-0.02	0.281	0.299
	FR1 n77_Ant Aux	100M	BPSK	135	69	Edge 1	22mm	OFF	656000	3840	SPEED	24.49	25.00	1.125			0.15	0.184	0.207
	FR1 n77_Ant Aux	100M	BPSK	1	1	Edge 4	25mm	OFF	656000	3840	SPEED	24.73	25.00	1.064			-0.09	0.110	0.117
	FR1 n77_Ant Aux	100M	BPSK	135	69	Edge 4	25mm	OFF	656000	3840	SPEED	24.49	25.00	1.125			0.11	0.090	0.101
	FR1 n77_Ant Main	100M	BPSK	1	1	Bottom of Laptop	0mm	ON	633332	3499.98	SPEED	7.23	8.00	1.194			-0.08	0.147	0.176
	FR1 n77_Ant Main	100M	BPSK	135	0	Bottom of Laptop	0mm	ON	633332	3499.98	SPEED	6.96	8.00	1.271			0.16	0.133	0.169
	FR1 n77_Ant Main	100M	BPSK	1	1	Bottom Face	0mm	ON	633332	3499.98	SPEED	7.23	8.00	1.194			0.05	0.483	0.577
	FR1 n77_Ant Main	100M	BPSK	135	0	Bottom Face	0mm	ON	633332	3499.98	SPEED	6.96	8.00	1.271			0.05	0.437	0.555
	FR1 n77_Ant Main	100M	BPSK	1	1	Edge 1	0mm	ON	633332	3499.98	SPEED	7.23	8.00	1.194			-0.15	0.130	0.155
	FR1 n77_Ant Main	100M	BPSK	135	0	Edge 1	0mm	ON	633332	3499.98	SPEED	6.96	8.00	1.271			0.02	0.118	0.150
	FR1 n77_Ant Main	100M	BPSK	1	1	Edge 2	0mm	ON	633332	3499.98	SPEED	7.23	8.00	1.194			0.07	0.128	0.153
	FR1 n77_Ant Main	100M	BPSK	135	0	Edge 2	0mm	ON	633332	3499.98	SPEED	6.96	8.00	1.271			0.16	0.116	0.147
	FR1 n77_HPUE_Ant Main	100M	BPSK	1	1	Bottom Face	0mm	ON	633332	3499.98	SPEED	10.43	11.00	1.140	50	1.000	0.06	0.479	0.546
	FR1 n77_Ant Main	100M	BPSK	1	1	Bottom Face	0mm	ON	633332	3499.98	SAA	7.23	8.00	1.194			0.16	0.496	0.592
	FR1 n77_Ant Main	100M	BPSK	1	1	Bottom of Laptop	25mm	OFF	633332	3499.98	SPEED	24.52	25.00	1.117			-0.18	0.129	0.144
	FR1 n77_Ant Main	100M	BPSK	135	69	Bottom of Laptop	25mm	OFF	633332	3499.98	SPEED	24.30	25.00	1.175			0.02	0.123	0.145
	FR1 n77_Ant Main	100M	BPSK	1	1	Bottom Face	25mm	OFF	633332	3499.98	SPEED	24.52	25.00	1.117			0.07	0.342	0.382
	FR1 n77_Ant Main	100M	BPSK	135	69	Bottom Face	25mm	OFF	633332	3499.98	SPEED	24.30	25.00	1.175			0	0.229	0.269
	FR1 n77_Ant Main	100M	BPSK	1	1	Edge 1	24mm	OFF	633332	3499.98	SPEED	24.52	25.00	1.117			0.01	0.193	0.216
	FR1 n77_Ant Main	100M	BPSK	135	69	Edge 1	24mm	OFF	633332	3499.98	SPEED	24.30	25.00	1.175			-0.01	0.190	0.223
	FR1 n77_Ant Main	100M	BPSK	1	1	Edge 2	12mm	OFF	633332	3499.98	SPEED	24.52	25.00	1.117			-0.06	0.216	0.241
	FR1 n77_Ant Main	100M	BPSK	135	69	Edge 2	12mm	OFF	633332	3499.98	SPEED	24.30	25.00	1.175			-0.04	0.197	0.231
	FR1 n77_Ant MIMO1	100M	BPSK	1	1	Bottom of Laptop	0mm	OFF	633332	3499.98	SPEED	8.00	8.00	1.000			-0.17	0.051	0.051
	FR1 n77_Ant MIMO1	100M	BPSK	135	0	Bottom of Laptop	0mm	OFF	633332	3499.98	SPEED	7.94	8.00	1.014			-0.1	0.046	0.047
	FR1 n77_Ant MIMO1	100M	BPSK	1	1	Bottom Face	0mm	OFF	633332	3499.98	SPEED	8.00	8.00	1.000			0.18	0.614	0.614
	FR1 n77_Ant MIMO1	100M	BPSK	135	0	Bottom Face	0mm	OFF	633332	3499.98	SPEED	7.94	8.00	1.014			-0.17	0.546	0.554
	FR1 n77_Ant MIMO1	100M	BPSK	1	1	Edge 2	0mm	OFF	633332	3499.98	SPEED	8.00	8.00	1.000			-0.05	0.906	0.906
	FR1 n77_Ant MIMO1	100M	BPSK	135	0	Edge 2	0mm	OFF	633332	3499.98	SPEED	7.94	8.00	1.014			0	0.806	0.817
	FR1 n77_Ant MIMO1	100M	BPSK	270	0	Edge 2	0mm	OFF	633332	3499.98	SPEED	7.86	8.00	1.033			-0.13	0.797	0.823
	FR1 n77_HPUE_Ant MIMO1	100M	BPSK	1	1	Edge 2	0mm	OFF	633332	3499.98	SPEED	10.80	11.00	1.047	50	1.000	-0.01	0.828	0.867
	FR1 n77_Ant MIMO1	100M	BPSK	1	1	Edge 2	0mm	OFF	633332	3499.98	SAA	8.00	8.00	1.000			-0.09	0.642	0.642



FCC SAR TEST REPORT

Report No. : FA3O1305

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Antenna Vendor	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	FR1 n77_Ant MIMO2	100M	BPSK	1	1	Bottom of Laptop	0mm	ON	633332	3499.98	SPEED	7.51	8.00	1.119			0.02	0.059	0.066
	FR1 n77_Ant MIMO2	100M	BPSK	135	0	Bottom of Laptop	0mm	ON	633332	3499.98	SPEED	7.33	8.00	1.167			-0.13	0.054	0.063
	FR1 n77_Ant MIMO2	100M	BPSK	1	1	Bottom Face	0mm	ON	633332	3499.98	SPEED	7.51	8.00	1.119			0.17	0.635	0.711
	FR1 n77_Ant MIMO2	100M	BPSK	135	0	Bottom Face	0mm	ON	633332	3499.98	SPEED	7.33	8.00	1.167			0.06	0.581	0.678
	FR1 n77_Ant MIMO2	100M	BPSK	1	1	Edge 1	0mm	ON	633332	3499.98	SPEED	7.51	8.00	1.119			0	0.019	0.021
	FR1 n77_Ant MIMO2	100M	BPSK	135	0	Edge 1	0mm	ON	633332	3499.98	SPEED	7.33	8.00	1.167			-0.04	0.017	0.020
	FR1 n77_Ant MIMO2	100M	BPSK	1	1	Edge 4	0mm	ON	633332	3499.98	SPEED	7.51	8.00	1.119			0.03	0.852	0.954
	FR1 n77_Ant MIMO2	100M	BPSK	135	0	Edge 4	0mm	ON	633332	3499.98	SPEED	7.33	8.00	1.167			-0.15	0.779	0.909
	FR1 n77_Ant MIMO2	100M	BPSK	270	0	Edge 4	0mm	ON	633332	3499.98	SPEED	7.16	8.00	1.213			0.11	0.749	0.909
	FR1 n77_HPUE_Ant MIMO2	100M	BPSK	1	1	Edge 4	0mm	ON	633332	3499.98	SPEED	10.23	11.00	1.194	50	1.000	0.1	0.740	0.884
	FR1 n77_Ant MIMO2	100M	BPSK	1	1	Edge 4	0mm	ON	633332	3499.98	SAA	7.51	8.00	1.119			0.13	0.785	0.879
	FR1 n77_Ant MIMO2	100M	BPSK	1	1	Bottom of Laptop	17mm	OFF	633332	3499.98	SPEED	23.58	25.00	1.387			-0.18	0.384	0.533
	FR1 n77_Ant MIMO2	100M	BPSK	135	69	Bottom of Laptop	17mm	OFF	633332	3499.98	SPEED	23.28	25.00	1.486			-0.11	0.362	0.538
	FR1 n77_Ant MIMO2	100M	BPSK	1	1	Bottom Face	19mm	OFF	633332	3499.98	SPEED	23.58	25.00	1.387			-0.06	0.441	0.612
	FR1 n77_Ant MIMO2	100M	BPSK	135	69	Bottom Face	19mm	OFF	633332	3499.98	SPEED	23.28	25.00	1.486			-0.14	0.402	0.597
	FR1 n77_Ant MIMO2	100M	BPSK	1	1	Edge 1	22mm	OFF	633332	3499.98	SPEED	23.58	25.00	1.387			-0.19	0.064	0.089
	FR1 n77_Ant MIMO2	100M	BPSK	135	69	Edge 1	22mm	OFF	633332	3499.98	SPEED	23.28	25.00	1.486			0.01	0.054	0.080
	FR1 n77_Ant MIMO2	100M	BPSK	1	1	Edge 4	22mm	OFF	633332	3499.98	SPEED	23.58	25.00	1.387			0.06	0.628	0.871
	FR1 n77_Ant MIMO2	100M	BPSK	135	69	Edge 4	22mm	OFF	633332	3499.98	SPEED	23.28	25.00	1.486			0.02	0.599	0.890
	FR1 n77_Ant MIMO2	100M	BPSK	270	0	Edge 4	22mm	OFF	633332	3499.98	SPEED	22.94	24.50	1.432			0.09	0.576	0.825
	FR1 n77_Ant Aux	100M	BPSK	1	1	Bottom of Laptop	0mm	ON	633332	3499.98	SPEED	7.63	8.00	1.089			-0.16	0.063	0.069
	FR1 n77_Ant Aux	100M	BPSK	135	0	Bottom of Laptop	0mm	ON	633332	3499.98	SPEED	7.56	8.00	1.107			-0.12	0.062	0.069
28	FR1 n77_Ant Aux	100M	BPSK	1	1	Bottom Face	0mm	ON	633332	3499.98	SPEED	7.63	8.00	1.089			0.05	0.944	1.028
	FR1 n77_Ant Aux	100M	BPSK	135	0	Bottom Face	0mm	ON	633332	3499.98	SPEED	7.56	8.00	1.107			0.07	0.838	0.927
	FR1 n77_Ant Aux	100M	BPSK	270	0	Bottom Face	0mm	ON	633332	3499.98	SPEED	7.45	8.00	1.135			-0.02	0.815	0.925
	FR1 n77_Ant Aux	100M	BPSK	1	1	Edge 1	0mm	ON	633332	3499.98	SPEED	7.63	8.00	1.089			-0.05	0.056	0.061
	FR1 n77_Ant Aux	100M	BPSK	135	0	Edge 1	0mm	ON	633332	3499.98	SPEED	7.56	8.00	1.107			-0.13	0.055	0.061
	FR1 n77_Ant Aux	100M	BPSK	1	1	Edge 4	0mm	ON	633332	3499.98	SPEED	7.63	8.00	1.089			0.08	0.051	0.056
	FR1 n77_Ant Aux	100M	BPSK	135	0	Edge 4	0mm	ON	633332	3499.98	SPEED	7.56	8.00	1.107			0.16	0.049	0.054
	FR1 n77_HPUE_Ant Aux	100M	BPSK	1	1	Bottom Face	0mm	ON	633332	3499.98	SPEED	10.81	11.00	1.045	50	1.000	0.01	0.894	0.934
	FR1 n77_Ant Aux	100M	BPSK	1	1	Bottom Face	0mm	ON	633332	3499.98	SAA	7.63	8.00	1.089			-0.16	0.831	0.905
	FR1 n77_Ant Aux	100M	BPSK	1	1	Bottom of Laptop	25mm	OFF	633332	3499.98	SPEED	24.94	25.00	1.014			0.1	0.079	0.080
	FR1 n77_Ant Aux	100M	BPSK	135	69	Bottom of Laptop	25mm	OFF	633332	3499.98	SPEED	24.65	25.00	1.084			-0.04	0.068	0.074
	FR1 n77_Ant Aux	100M	BPSK	1	1	Bottom Face	25mm	OFF	633332	3499.98	SPEED	24.94	25.00	1.014			-0.11	0.211	0.214
	FR1 n77_Ant Aux	100M	BPSK	135	69	Bottom Face	25mm	OFF	633332	3499.98	SPEED	24.65	25.00	1.084			-0.06	0.154	0.167
	FR1 n77_Ant Aux	100M	BPSK	1	1	Edge 1	22mm	OFF	633332	3499.98	SPEED	24.94	25.00	1.014			-0.15	0.168	0.170
	FR1 n77_Ant Aux	100M	BPSK	135	69	Edge 1	22mm	OFF	633332	3499.98	SPEED	24.65	25.00	1.084			0.03	0.116	0.126
	FR1 n77_Ant Aux	100M	BPSK	1	1	Edge 4	25mm	OFF	633332	3499.98	SPEED	24.94	25.00	1.014			-0.13	0.059	0.060
	FR1 n77_Ant Aux	100M	BPSK	135	69	Edge 4	25mm	OFF	633332	3499.98	SPEED	24.65	25.00	1.084			0.16	0.035	0.038



14.2 Repeated SAR Measurement

No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (cm)	Antenna	Ch.	Freq. (MHz)	Data Rate (bps)	Power Back-off	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	LTE Band 30_Ant Main	10M	QPSK	1	0	Bottom Face	0mm	Main	ON	27710	2310	SPEED	12.74	13.50	1.191	0.12	0.975	-	1.161
2nd	LTE Band 30_Ant Main	10M	QPSK	1	0	Bottom Face	0mm	Main	ON	27710	2310	SPEED	12.74	13.50	1.191	0.13	0.961	1.01	1.145
1st	LTE Band 66_Ant MIMO2	20M	QPSK	1	0	Bottom Face	0mm	MIMO2	ON	132572	1770	SPEED	12.59	13.00	1.099	0.12	1.020	-	1.121
2nd	LTE Band 66_Ant MIMO2	20M	QPSK	1	0	Bottom Face	0mm	MIMO2	ON	132572	1770	SPEED	12.59	13.00	1.099	0.12	0.969	1.05	1.065
1st	FR1 n25_Ant MIMO2	40M	BPSK	1	1	Edge 4	0mm	MIMO2	ON	376500	1882.5	SAA	12.30	13.00	1.175	-0.03	1.020	-	1.198
2nd	FR1 n25_Ant MIMO2	40M	BPSK	1	1	Edge 4	0mm	MIMO2	ON	376500	1882.5	SAA	12.30	13.00	1.175	-0.03	0.938	1.09	1.102
1st	FR1 n26_Ant Main	20M	BPSK	1	1	Bottom Face	0mm	Main	ON	166300	831.5	SPEED	17.35	18.00	1.161	-0.03	0.981	-	1.139
2nd	FR1 n26_Ant Main	20M	BPSK	1	1	Bottom Face	0mm	Main	ON	166300	831.5	SPEED	17.35	18.00	1.161	-0.03	0.952	1.03	1.106
1st	FR1 n41_Ant MIMO2	100M	BPSK	1	1	Edge 4	0mm	MIMO2	ON	518598	2592.99	SPEED	8.81	9.00	1.045	0.15	1.050	-	1.097
2nd	FR1 n41_Ant MIMO2	100M	BPSK	1	1	Edge 4	0mm	MIMO2	ON	518598	2592.99	SPEED	8.81	9.00	1.045	0.15	0.987	1.06	1.031
1st	FR1 n48_Ant Aux	40M	BPSK	1	1	Bottom Face	0mm	Aux	ON	645332	3679.98	SPEED	7.87	8.50	1.156	0.01	0.943	-	1.090
2nd	FR1 n48_Ant Aux	40M	BPSK	1	1	Bottom Face	0mm	Aux	ON	645332	3679.98	SPEED	7.87	8.50	1.156	0.01	0.935	1.01	1.081
1st	FR1 n71_Ant Main	20M	BPSK	1	1	Edge 2	0mm	Main	ON	136100	680.5	SPEED	16.41	16.50	1.021	-0.03	1.080	-	1.103
2nd	FR1 n71_Ant Main	20M	BPSK	1	1	Edge 2	0mm	Main	ON	136100	680.5	SPEED	16.41	16.50	1.021	-0.03	0.995	1.09	1.016
1st	FR1 n77_Ant Aux	100M	BPSK	1	1	Bottom Face	0mm	Aux	ON	656000	3840	SPEED	7.46	8.00	1.132	-0.04	0.885	-	1.002
2nd	FR1 n77_Ant Aux	100M	BPSK	1	1	Bottom Face	0mm	Aux	ON	656000	3840	SPEED	7.46	8.00	1.132	-0.04	0.849	1.04	0.961
1st	FR1 n77_Ant Aux	100M	BPSK	1	1	Bottom Face	0mm	Aux	ON	633332	3499.98	SPEED	7.63	8.00	1.089	0.05	0.944	-	1.028
2nd	FR1 n77_Ant Aux	100M	BPSK	1	1	Bottom Face	0mm	Aux	ON	633332	3499.98	SPEED	7.63	8.00	1.089	0.05	0.935	1.01	1.018

General Note:

1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is $\geq 0.8W/kg$.
2. Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR $< 1.45W/kg$, only one repeated measurement is required.
3. The ratio is the difference in percentage between original and repeated *measured SAR*.
4. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.



14.3 LTE Band 41 Power Class 2 and Power Class 3 Linearity

This device support Power Class 2 and Power Class 3 operations for LTE Band 41. The highest available duty cycle for Power Class 2 operation is 43.3% using UL-DL configuration 1. Per FCC Guidance based on the device behavior, all SAR tests were performed using Power Class 3. Power Class 2 is tested using the highest SAR test configuration in Power Class 3 for each LTE configuration and exposure condition combination, according to the highest time averaged power for all applicable uplink-downlink configurations in Power Class 2. When the reported SAR vs. output power is linearly scaled with < 10% discrepancy between power classes and all reported SAR are < 1.4 W/kg, Separate SAR testing for Power Class 2 is not required
Use PC3 power level and SAR to estimated PC2 SAR linearly, and check if the deviation from the measured PC2 SAR is <10%

<Body>

Table with 3 columns: Parameter, LTE Band 41_Main (Power Class 3), and LTE Band 41_Main (Power Class 2). Rows include Maximum Tune up Power (dBm), Reported 1g SAR (W/kg), Duty Cycle, Frame Averaged (mW), Linearity SAR(W/kg), and % deviation from expected linearity.



14.4 FR1 n41/n77 Power Class 2 and Power Class 3 Linearity

This device support Power Class 2 and Power Class 3 operations for FR1 n41/n77. The highest available duty cycle for Power Class 2 operation is 50%. Per FCC Guidance based on the device behavior, all SAR tests were performed using Power Class 3. Power Class 2 is tested using the highest SAR test configuration in Power Class 3 for each FR1 configuration and exposure condition combination, according to the highest time averaged power for Power Class 2. When the reported SAR vs. output power is linearly scaled with < 10% discrepancy between power classes and all reported SAR are < 1.4 W/kg, Separate SAR testing for Power Class 2 is not required. Use PC3 power level and SAR to estimated PC2 SAR linearly, and check if the deviation from the measured PC2 SAR is <10%

<Body>

	FR1 n41_Main	FR1 n41_Main
	(Power Class 3)	(Power Class 2)
Maximum Tune up Power (dBm)	9	12
Reported 1g SAR (W/kg)	0.484	0.442
Duty Cycle	100.00%	50.00%
Frame Averaged (mW)	7.94	7.92
Linearity SAR(W/kg)	0.48	
% deviation from expected linearity		-8.46%

	FR1 n41_MIMO1	FR1 n41_MIMO1
	(Power Class 3)	(Power Class 2)
Maximum Tune up Power (dBm)	9	12
Reported 1g SAR (W/kg)	0.914	0.832
Duty Cycle	100.00%	50.00%
Frame Averaged (mW)	7.94	7.92
Linearity SAR(W/kg)	0.91	
% deviation from expected linearity		-8.76%

	FR1 n41_MIMO2	FR1 n41_MIMO2
	(Power Class 3)	(Power Class 2)
Maximum Tune up Power (dBm)	9	12
Reported 1g SAR (W/kg)	1.097	1.019
Duty Cycle	100.00%	50.00%
Frame Averaged (mW)	7.94	7.92
Linearity SAR(W/kg)	1.09	
% deviation from expected linearity		-6.89%

	FR1 n41_AUX	FR1 n41_AUX
	(Power Class 3)	(Power Class 2)
Maximum Tune up Power (dBm)	9	12
Reported 1g SAR (W/kg)	0.593	0.553
Duty Cycle	100.00%	50.00%
Frame Averaged (mW)	7.94	7.92
Linearity SAR(W/kg)	0.59	
% deviation from expected linearity		-6.52%



	FR1 n77_Main	FR1 n77_Main
	(Power Class 3)	(Power Class 2)
Maximum Tune up Power (dBm)	8	11
Reported 1g SAR (W/kg)	0.677	0.639
Duty Cycle	100.00%	50.00%
Frame Averaged (mW)	6.31	6.29
Linearity SAR(W/kg)	0.68	
% deviation from expected linearity		-5.39%

	FR1 n77_MIMO1	FR1 n77_MIMO1
	(Power Class 3)	(Power Class 2)
Maximum Tune up Power (dBm)	8	11
Reported 1g SAR (W/kg)	0.906	0.867
Duty Cycle	100.00%	50.00%
Frame Averaged (mW)	6.31	6.29
Linearity SAR(W/kg)	0.90	
% deviation from expected linearity		-4.08%

	FR1 n77_MIMO2	FR1 n77_MIMO2
	(Power Class 3)	(Power Class 2)
Maximum Tune up Power (dBm)	8	11
Reported 1g SAR (W/kg)	0.954	0.884
Duty Cycle	100.00%	50.00%
Frame Averaged (mW)	6.31	6.29
Linearity SAR(W/kg)	0.95	
% deviation from expected linearity		-7.12%

	FR1 n77_AUX	FR1 n77_AUX
	(Power Class 3)	(Power Class 2)
Maximum Tune up Power (dBm)	8	11
Reported 1g SAR (W/kg)	1.028	0.934
Duty Cycle	100.00%	50.00%
Frame Averaged (mW)	6.31	6.29
Linearity SAR(W/kg)	1.03	
% deviation from expected linearity		-8.93%

15. Simultaneous Transmission Analysis

NO.	Simultaneous Transmission Configurations	Body
1.	WWAN Main + WWAN MIMO 2 + WLAN2.4GHz Main + WLAN2.4GHz AUX	Yes
2.	WWAN Main + WWAN MIMO 2 + WLAN2.4GHz Main + Bluetooth Ant Aux	Yes
3.	WWAN Main + WWAN MIMO 2 + WLAN5/6GHz Main + WLAN5/6GHz Aux + Bluetooth Ant Aux	Yes
4.	WWAN MIMO 1 + WLAN2.4GHz Main + WLAN2.4GHz AUX	Yes
5.	WWAN MIMO 1 + WLAN2.4GHz Main + Bluetooth Ant Aux	Yes
6.	WWAN MIMO 1 + WLAN5/6GHz Main + WLAN5/6GHz Aux + Bluetooth Ant Aux	Yes
7.	WWAN Aux + WLAN2.4GHz Main + WLAN2.4GHz AUX	Yes
8.	WWAN Aux + WLAN2.4GHz Main + Bluetooth Ant Aux	Yes
9.	WWAN Aux + WLAN5/6GHz Main + WLAN5/6GHz Aux + Bluetooth Ant Aux	Yes

General Note:

1. The Intel AX211D2W WLAN/BT module is integrated into this host. The WLAN 2.4GHz, 5GHz and Bluetooth SAR results are referenced from Intel SAR report, report number: 230705-01.TR01 (FCC ID: PD9AX211D2), the WLAN 5.9GHz SAR referred to report No.: 230705-01.TR02 (FCC ID: PD9AX211D2), and the WLAN 6GHz SAR referred to report No.: 230705-01.TR03 (FCC ID: PD9AX211D2).
2. The Intel BE200D2W WLAN/BT module is also integrated into this host. The WLAN 2.4GHz, 5GHz and Bluetooth SAR results are referenced from Intel SAR report, report number: 230705-02.TR01 (FCC ID: PD9BE200D2), and the WLAN 6GHz SAR referred to report No.: 230705-02.TR02 (FCC ID: PD9BE200D2) and these SAR results are also used to perform simultaneous transmission analysis.
3. The worst case WLAN reported SAR for each configuration was used for SAR summation. Therefore, the following summations represent the absolute worst cases for simultaneous transmission with WLAN.
4. The Scaled SAR summation is calculated based on the same configuration and test position.
5. Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - i) Scalar SAR summation < 1.6W/kg.
 - ii) $SPLSR = (SAR1 + SAR2)^{1.5} / (\min. \text{separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - iii) If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary.
 - iv) Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.
 - v) The SPLSR calculated results please refer to section 15.2.

15.1 Body Exposure Conditions

WWAN + AX211D2W

WWAN Ant	WWAN Ant	Exposure Position	1	2	3	4	5	6	7	1+2+3+4	1+2+3+7	1+2+5+6+7	SPLSR	Case No	
			Maximum WWAN 1g SAR (W/kg)	Maximum WWAN 1g SAR (W/kg)	WLAN2.4GHz Main 1g SAR (W/kg)	WLAN2.4GHz AUX 1g SAR (W/kg)	WLAN5/6GHz Main 1g SAR (W/kg)	WLAN5/6GHz Aux 1g SAR (W/kg)	Bluetooth Ant Aux 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Summed 1g SAR (W/kg)			
Maximum Main Ant	Maximum MIMO2 Ant	Bottom of Laptop at 0mm	0.529	0.329	0.680	0.690	0.880	0.780	0.150	2.228	1.688	2.668	0.02	Case 1	
		Bottom Face at 0mm	1.195	1.140	0.590	0.660	0.100	0.090	0.190	3.585	3.115	2.715	0.02	Case 2	
		Edge 1 at 0mm	0.521	0.042							0.563	0.563	0.563		
		Edge 2 at 0mm	1.165								1.165	1.165	1.165		
		Edge 3 at 0mm		0.001	1.080	1.120	1.190	1.170	0.230		2.201	1.311	2.591	0.03	Case 3
		Edge 4 at 0mm		1.198							1.198	1.198	1.198		
Maximum MIMO1 Ant		Bottom of Laptop at 0mm	0.140		0.680	0.690	0.880	0.780	0.150	1.510	0.970	1.950	0.02	Case 4	
		Bottom Face at 0mm	0.914		0.590	0.660	0.100	0.090	0.190	2.164	1.694	1.294	0.01	Case 5	
		Edge 2 at 0mm	0.906							0.906	0.906	0.906			
Maximum Aux Ant		Bottom of Laptop at 0mm	0.157		0.680	0.690	0.880	0.780	0.150	1.527	0.987	1.967	0.02	Case 7	
		Bottom Face at 0mm	1.090		0.590	0.660	0.100	0.090	0.190	2.340	1.870	1.470	0.01	Case 8	
		Edge 1 at 0mm	0.143							0.143	0.143	0.143			
		Edge 4 at 0mm	0.129							0.129	0.129	0.129			

WWAN + BE200D2W

WWAN Ant	WWAN Ant	Exposure Position	1	2	3	4	5	6	7	1+2+3+4	1+2+3+7	1+2+5+6+7	SPLSR	Case No	
			Maximum WWAN 1g SAR (W/kg)	Maximum WWAN 1g SAR (W/kg)	WLAN2.4GHz Main 1g SAR (W/kg)	WLAN2.4GHz AUX 1g SAR (W/kg)	WLAN5/6GHz Main 1g SAR (W/kg)	WLAN5/6GHz Aux 1g SAR (W/kg)	Bluetooth Ant Aux 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Summed 1g SAR (W/kg)			
Maximum Main Ant	Maximum MIMO2 Ant	Bottom of Laptop at 0mm	0.529	0.329	0.780	0.830	0.960	0.690	0.270	2.468	1.908	2.778	0.02	Case 1	
		Bottom Face at 0mm	1.195	1.140	0.550	0.650	0.090	0.110	0.210	3.535	3.095	2.745	0.02	Case 2	
		Edge 1 at 0mm	0.521	0.042							0.563	0.563	0.563		
		Edge 2 at 0mm	1.165								1.165	1.165	1.165		
		Edge 3 at 0mm		0.001	1.040	1.170	1.180	1.190	0.250		2.211	1.291	2.621	0.03	Case 3
		Edge 4 at 0mm		1.198							1.198	1.198	1.198		
Maximum MIMO1 Ant		Bottom of Laptop at 0mm	0.140		0.780	0.830	0.960	0.690	0.270	1.750	1.190	2.060	0.02	Case 4	
		Bottom Face at 0mm	0.914		0.550	0.650	0.090	0.110	0.210	2.114	1.674	1.324	0.01	Case 5	
		Edge 2 at 0mm	0.906							0.906	0.906	0.906			
Maximum Aux Ant		Bottom of Laptop at 0mm	0.157		0.780	0.830	0.960	0.690	0.270	1.767	1.207	2.077	0.02	Case 7	
		Bottom Face at 0mm	1.090		0.550	0.650	0.090	0.110	0.210	2.290	1.850	1.500	0.01	Case 8	
		Edge 1 at 0mm	0.143							0.143	0.143	0.143			
		Edge 4 at 0mm	0.129							0.129	0.129	0.129			

15.2 SPLSR Evaluation and Analysis

General Note:

1. According to antenna location of Appendix E, the minimum distance between each transmit antenna is using for SPLSR analysis.
2. Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneously transmitting antenna. When the sum of 1-g or 10-g SAR of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit, SAR test exclusion applies to that simultaneous transmission configuration. Therefore, the adjacent transmit antennas will be summed first, and then the SPLSR calculation will be evaluated with the farther transmitted antennas.
3. $SPLSR = (SAR_1 + SAR_2)^{1.5} / (min. \text{ separation distance, mm})$. If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary

WWAN + AX211D2W

	Band	Position	SAR (W/kg)	Gap	Minimum distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
				(mm)				
Case 1	Maximum WWAN Main Ant	Bottom of Laptop	0.529	0mm	218.9	0.86	0.00	Not required
	Maximum WWAN MIMO2 Ant		0.329	0mm				
	Maximum WWAN Main Ant	Bottom of Laptop	0.529	0mm	198.9	1.21	0.01	Not required
	WLAN2.4GHz Main		0.68	0mm				
	Maximum WWAN Main Ant	Bottom of Laptop	0.529	0mm	249.4	1.22	0.01	Not required
	WLAN2.4GHz AUX		0.69	0mm				
	Maximum WWAN MIMO2 Ant	Bottom of Laptop	0.329	0mm	264.6	1.01	0.00	Not required
	WLAN2.4GHz Main		0.68	0mm				
	Maximum WWAN MIMO2 Ant	Bottom of Laptop	0.329	0mm	155.6	1.02	0.01	Not required
	WLAN2.4GHz AUX		0.69	0mm				
	WLAN2.4GHz Main	Bottom of Laptop	0.68	0mm	153.1	1.37	0.01	Not required
	WLAN2.4GHz AUX		0.69	0mm				
	Maximum WWAN Main Ant	Bottom of Laptop	0.529	0mm	198.9	1.41	0.01	Not required
	WLAN5/6GHz Main		0.88	0mm				
	Maximum WWAN Main Ant	Bottom of Laptop	0.529	0mm	249.4	1.46	0.01	Not required
	WLAN5/6GHz Aux+Bluetooth Aux		0.93	0mm				
	Maximum WWAN MIMO2 Ant	Bottom of Laptop	0.329	0mm	198.9	1.21	0.01	Not required
	WLAN5/6GHz Main		0.88	0mm				
	Maximum WWAN MIMO2 Ant	Bottom of Laptop	0.329	0mm	249.4	1.26	0.01	Not required
	WLAN5/6GHz Aux+Bluetooth Aux		0.93	0mm				
WLAN5/6GHz Main	Bottom of Laptop	0.88	0mm	153.1	1.81	0.02	Not required	
WLAN5/6GHz Aux+Bluetooth Aux		0.93	0mm					
WLAN2.4GHz Main	Bottom of Laptop	0.68	0mm	153.1	0.83	0.00	Not required	
Bluetooth Aux		0.15	0mm					

	Band	Position	SAR (W/kg)	Gap	Minimum distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
				(mm)				
Case 2	Maximum WWAN Main Ant	Bottom Face	1.195	0mm	218.9	2.34	0.02	Not required
	Maximum WWAN MIMO2 Ant		1.14	0mm				
	Maximum WWAN Main Ant	Bottom Face	1.195	0mm	198.9	1.79	0.01	Not required
	WLAN2.4GHz Main		0.59	0mm				
	Maximum WWAN Main Ant	Bottom Face	1.195	0mm	249.4	1.86	0.01	Not required
	WLAN2.4GHz AUX		0.66	0mm				
	Maximum WWAN MIMO2 Ant	Bottom Face	1.14	0mm	264.6	1.73	0.01	Not required
	WLAN2.4GHz Main		0.59	0mm				
	Maximum WWAN MIMO2 Ant	Bottom Face	1.14	0mm	155.6	1.80	0.02	Not required
	WLAN2.4GHz AUX		0.66	0mm				
	WLAN2.4GHz Main	Bottom Face	0.59	0mm	153.1	1.25	0.01	Not required
	WLAN2.4GHz AUX		0.66	0mm				
	Maximum WWAN Main Ant	Bottom Face	1.195	0mm	198.9	1.30	0.01	Not required
	WLAN5/6GHz Main		0.1	0mm				
	Maximum WWAN Main Ant	Bottom Face	1.195	0mm	249.4	1.48	0.01	Not required
	WLAN5/6GHz Aux+Bluetooth Aux		0.28	0mm				
	Maximum WWAN MIMO2 Ant	Bottom Face	1.14	0mm	198.9	1.24	0.01	Not required
	WLAN5/6GHz Main		0.1	0mm				
	Maximum WWAN MIMO2 Ant	Bottom Face	1.14	0mm	249.4	1.42	0.01	Not required
	WLAN5/6GHz Aux+Bluetooth Aux		0.28	0mm				
WLAN5/6GHz Main	Bottom Face	0.1	0mm	153.1	0.38	0.00	Not required	
WLAN5/6GHz Aux+Bluetooth Aux		0.28	0mm					
WLAN2.4GHz Main	Bottom Face	0.59	0mm	153.1	0.78	0.00	Not required	
Bluetooth Aux		0.19	0mm					



	Band	Position	SAR (W/kg)	Gap	Minimum distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
				(mm)				
Case 3	Maximum WWAN MIMO2 Ant	Edge 3	0.001	0mm	235.3	1.08	0.00	Not required
	WLAN2.4GHz Main		1.08	0mm				
	Maximum WWAN MIMO2 Ant	Edge 3	0.001	0mm	62.1	1.12	0.02	Not required
	WLAN2.4GHz AUX		1.12	0mm				
	WLAN2.4GHz Main	Edge 3	1.08	0mm	153.1	2.20	0.02	Not required
	WLAN2.4GHz AUX		1.12	0mm				
	Maximum WWAN MIMO2 Ant	Edge 3	0.001	0mm	235.3	1.19	0.01	Not required
	WLAN5/6GHz Main		1.19	0mm				
	Maximum WWAN MIMO2 Ant	Edge 3	0.001	0mm	62.1	1.40	0.03	Not required
	WLAN5/6GHz Aux+Bluetooth Aux		1.4	0mm				
WLAN5/6GHz Main	Edge 3	1.19	0mm	153.1	2.59	0.03	Not required	
WLAN5/6GHz Aux+Bluetooth Aux		1.4	0mm					
Case 4	Maximum WWAN MIMO1 Ant	Bottom of Laptop	0.14	0mm	155.6	1.02	0.01	Not required
	WLAN5/6GHz Main		0.88	0mm				
	Maximum WWAN MIMO1 Ant	Bottom of Laptop	0.14	0mm	264.6	1.07	0.00	Not required
	WLAN5/6GHz Aux+Bluetooth Aux		0.93	0mm				
	WLAN5/6GHz Main	Bottom of Laptop	0.88	0mm	153.1	1.81	0.02	Not required
	WLAN5/6GHz Aux+Bluetooth Aux		0.93	0mm				
Case 5	Maximum WWAN MIMO1 Ant	Bottom Face	0.914	0mm	155.6	1.50	0.01	Not required
	WLAN2.4GHz Main		0.59	0mm				
	Maximum WWAN MIMO1 Ant	Bottom Face	0.914	0mm	264.6	1.57	0.01	Not required
	WLAN2.4GHz AUX		0.66	0mm				
	WLAN2.4GHz Main	Bottom Face	0.59	0mm	153.1	1.25	0.01	Not required
	WLAN2.4GHz AUX		0.66	0mm				
	Maximum WWAN MIMO1 Ant	Bottom Face	0.914	0mm	264.6	1.10	0.00	Not required
	Bluetooth Aux		0.19	0mm				
	WLAN2.4GHz Main	Bottom Face	0.59	0mm	153.1	0.78	0.00	Not required
Bluetooth Aux	0.19		0mm					
Case 7	Maximum WWAN Aux Ant	Bottom of Laptop	0.157	0mm	254.4	1.04	0.00	Not required
	WLAN5/6GHz Main		0.88	0mm				
	Maximum WWAN Aux Ant	Bottom of Laptop	0.157	0mm	198.3	1.09	0.01	Not required
	WLAN5/6GHz Aux+Bluetooth Aux		0.93	0mm				
	WLAN5/6GHz Main	Bottom of Laptop	0.88	0mm	153.1	1.81	0.02	Not required
	WLAN5/6GHz Aux+Bluetooth Aux		0.93	0mm				
Case 8	Maximum WWAN Aux Ant	Bottom Face	1.09	0mm	254.4	1.68	0.01	Not required
	WLAN2.4GHz Main		0.59	0mm				
	Maximum WWAN Aux Ant	Bottom Face	1.09	0mm	198.3	1.75	0.01	Not required
	WLAN2.4GHz AUX		0.66	0mm				
	WLAN2.4GHz Main	Bottom Face	0.59	0mm	153.1	1.25	0.01	Not required
	WLAN2.4GHz AUX		0.66	0mm				
	Maximum WWAN Aux Ant	Bottom Face	1.09	0mm	198.3	1.28	0.01	Not required
	Bluetooth Aux		0.19	0mm				
	WLAN2.4GHz Main	Bottom Face	0.59	0mm	153.1	0.78	0.00	Not required
Bluetooth Aux	0.19		0mm					



WWAN + BE200D2W

	Band	Position	SAR (W/kg)	Gap	Minimum distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
				(mm)				
Case 1	Maximum WWAN Main Ant	Bottom of Laptop	0.529	0mm	218.9	0.86	0.00	Not required
	Maximum WWAN MIMO2 Ant		0.329	0mm				
	Maximum WWAN Main Ant	Bottom of Laptop	0.529	0mm	198.9	1.31	0.01	Not required
	WLAN2.4GHz Main		0.78	0mm				
	Maximum WWAN Main Ant	Bottom of Laptop	0.529	0mm	249.4	1.36	0.01	Not required
	WLAN2.4GHz AUX		0.83	0mm				
	Maximum WWAN MIMO2 Ant	Bottom of Laptop	0.329	0mm	264.6	1.11	0.00	Not required
	WLAN2.4GHz Main		0.78	0mm				
	Maximum WWAN MIMO2 Ant	Bottom of Laptop	0.329	0mm	155.6	1.16	0.01	Not required
	WLAN2.4GHz AUX		0.83	0mm				
	WLAN2.4GHz Main	Bottom of Laptop	0.78	0mm	153.1	1.61	0.01	Not required
	WLAN2.4GHz AUX		0.83	0mm				
	Maximum WWAN Main Ant	Bottom of Laptop	0.529	0mm	198.9	1.49	0.01	Not required
	WLAN5/6GHz Main		0.96	0mm				
	Maximum WWAN Main Ant	Bottom of Laptop	0.529	0mm	249.4	1.49	0.01	Not required
	WLAN5/6GHz Aux+Bluetooth Aux		0.96	0mm				
	Maximum WWAN MIMO2 Ant	Bottom of Laptop	0.329	0mm	198.9	1.29	0.01	Not required
	WLAN5/6GHz Main		0.96	0mm				
	Maximum WWAN MIMO2 Ant	Bottom of Laptop	0.329	0mm	249.4	1.29	0.01	Not required
	WLAN5/6GHz Aux+Bluetooth Aux		0.96	0mm				
WLAN5/6GHz Main	Bottom of Laptop	0.96	0mm	153.1	1.92	0.02	Not required	
WLAN5/6GHz Aux+Bluetooth Aux		0.96	0mm					
WLAN2.4GHz Main	Bottom of Laptop	0.78	0mm	153.1	1.05	0.01	Not required	
Bluetooth Aux		0.27	0mm					



	Band	Position	SAR (W/kg)	Gap	Minimum distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
				(mm)				
Case 2	Maximum WWAN Main Ant	Bottom Face	1.195	0mm	218.9	2.34	0.02	Not required
	Maximum WWAN MIMO2 Ant		1.14	0mm				
	Maximum WWAN Main Ant	Bottom Face	1.195	0mm	198.9	1.75	0.01	Not required
	WLAN2.4GHz Main		0.55	0mm				
	Maximum WWAN Main Ant	Bottom Face	1.195	0mm	249.4	1.85	0.01	Not required
	WLAN2.4GHz AUX		0.65	0mm				
	Maximum WWAN MIMO2 Ant	Bottom Face	1.14	0mm	264.6	1.69	0.01	Not required
	WLAN2.4GHz Main		0.55	0mm				
	Maximum WWAN MIMO2 Ant	Bottom Face	1.14	0mm	155.6	1.79	0.02	Not required
	WLAN2.4GHz AUX		0.65	0mm				
	WLAN2.4GHz Main	Bottom Face	0.55	0mm	153.1	1.20	0.01	Not required
	WLAN2.4GHz AUX		0.65	0mm				
	Maximum WWAN Main Ant	Bottom Face	1.195	0mm	198.9	1.29	0.01	Not required
	WLAN5/6GHz Main		0.09	0mm				
	Maximum WWAN Main Ant	Bottom Face	1.195	0mm	249.4	1.52	0.01	Not required
	WLAN5/6GHz Aux+Bluetooth Aux		0.32	0mm				
	Maximum WWAN MIMO2 Ant	Bottom Face	1.14	0mm	198.9	1.23	0.01	Not required
	WLAN5/6GHz Main		0.09	0mm				
	Maximum WWAN MIMO2 Ant	Bottom Face	1.14	0mm	249.4	1.46	0.01	Not required
	WLAN5/6GHz Aux+Bluetooth Aux		0.32	0mm				
WLAN5/6GHz Main	Bottom Face	0.09	0mm	153.1	0.41	0.00	Not required	
WLAN5/6GHz Aux+Bluetooth Aux		0.32	0mm					
WLAN2.4GHz Main	Bottom Face	0.55	0mm	153.1	0.76	0.00	Not required	
Bluetooth Aux		0.21	0mm					
Case 3	Band	Position	SAR (W/kg)	Gap (mm)	Minimum distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	Maximum WWAN MIMO2 Ant	Edge 3	0.001	0mm	235.3	1.04	0.00	Not required
	WLAN2.4GHz Main		1.04	0mm				
	Maximum WWAN MIMO2 Ant	Edge 3	0.001	0mm	62.1	1.17	0.02	Not required
	WLAN2.4GHz AUX		1.17	0mm				
	WLAN2.4GHz Main	Edge 3	1.04	0mm	153.1	2.21	0.02	Not required
	WLAN2.4GHz AUX		1.17	0mm				
	Maximum WWAN MIMO2 Ant	Edge 3	0.001	0mm	235.3	1.18	0.01	Not required
	WLAN5/6GHz Main		1.18	0mm				
	Maximum WWAN MIMO2 Ant	Edge 3	0.001	0mm	62.1	1.44	0.03	Not required
	WLAN5/6GHz Aux+Bluetooth Aux		1.44	0mm				
	WLAN5/6GHz Main	Edge 3	1.18	0mm	153.1	2.62	0.03	Not required
WLAN5/6GHz Aux+Bluetooth Aux	1.44		0mm					
Case 4	Band	Position	SAR (W/kg)	Gap (mm)	Minimum distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	Maximum WWAN MIMO1 Ant	Bottom of Laptop	0.14	0mm	155.6	0.92	0.01	Not required
	WLAN2.4GHz Main		0.78	0mm				
	Maximum WWAN MIMO1 Ant	Bottom of Laptop	0.14	0mm	264.6	0.97	0.00	Not required
	WLAN2.4GHz AUX		0.83	0mm				
	WLAN2.4GHz Main	Bottom of Laptop	0.78	0mm	153.1	1.61	0.01	Not required
	WLAN2.4GHz AUX		0.83	0mm				
	Maximum WWAN MIMO1 Ant	Bottom of Laptop	0.14	0mm	155.6	1.10	0.01	Not required
	WLAN5/6GHz Main		0.96	0mm				
	Maximum WWAN MIMO1 Ant	Bottom of Laptop	0.14	0mm	264.6	1.10	0.00	Not required
WLAN5/6GHz Aux+Bluetooth Aux	0.96		0mm					
WLAN5/6GHz Main	Bottom of Laptop	0.96	0mm	153.1	1.92	0.02	Not required	
WLAN5/6GHz Aux+Bluetooth Aux		0.96	0mm					



	Band	Position	SAR (W/kg)	Gap	Minimum distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
				(mm)				
Case 5	Maximum WWAN MIMO1 Ant	Bottom Face	0.914	0mm	155.6	1.46	0.01	Not required
	WLAN2.4GHz Main		0.55	0mm				
	Maximum WWAN MIMO1 Ant	Bottom Face	0.914	0mm	264.6	1.56	0.01	Not required
	WLAN2.4GHz AUX		0.65	0mm				
	WLAN2.4GHz Main	Bottom Face	0.55	0mm	153.1	1.20	0.01	Not required
	WLAN2.4GHz AUX		0.65	0mm				
	Maximum WWAN MIMO1 Ant	Bottom Face	0.914	0mm	264.6	1.12	0.00	Not required
	Bluetooth Aux		0.21	0mm				
	WLAN2.4GHz Main	Bottom Face	0.55	0mm	153.1	0.76	0.00	Not required
Bluetooth Aux	0.21		0mm					
Case 7	Maximum WWAN Aux Ant	Bottom of Laptop	0.157	0mm	254.4	0.94	0.00	Not required
	WLAN2.4GHz Main		0.78	0mm				
	Maximum WWAN Aux Ant	Bottom of Laptop	0.157	0mm	198.3	0.99	0.00	Not required
	WLAN2.4GHz AUX		0.83	0mm				
	WLAN2.4GHz Main	Bottom of Laptop	0.78	0mm	153.1	1.61	0.01	Not required
	WLAN2.4GHz AUX		0.83	0mm				
	Maximum WWAN Aux Ant	Bottom of Laptop	0.157	0mm	254.4	1.12	0.00	Not required
	WLAN5/6GHz Main		0.96	0mm				
	Maximum WWAN Aux Ant	Bottom of Laptop	0.157	0mm	198.3	1.12	0.01	Not required
	WLAN5/6GHz Aux+Bluetooth Aux		0.96	0mm				
	WLAN5/6GHz Main	Bottom of Laptop	0.96	0mm	153.1	1.92	0.02	Not required
WLAN5/6GHz Aux+Bluetooth Aux	0.96		0mm					
Case 8	Maximum WWAN Aux Ant	Bottom Face	1.09	0mm	254.4	1.64	0.01	Not required
	WLAN2.4GHz Main		0.55	0mm				
	Maximum WWAN Aux Ant	Bottom Face	1.09	0mm	198.3	1.74	0.01	Not required
	WLAN2.4GHz AUX		0.65	0mm				
	WLAN2.4GHz Main	Bottom Face	0.55	0mm	153.1	1.20	0.01	Not required
	WLAN2.4GHz AUX		0.65	0mm				
	Maximum WWAN Aux Ant	Bottom Face	1.09	0mm	198.3	1.30	0.01	Not required
	Bluetooth Aux		0.21	0mm				
	WLAN2.4GHz Main	Bottom Face	0.55	0mm	153.1	0.76	0.00	Not required
Bluetooth Aux	0.21		0mm					

Test Engineer : Sing Lim, Bevis Chang, John Fan, Andy Chiang, Randy Lin and Chris Yang



16. Uncertainty Assessment

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg. Therefore, the measurement uncertainty table is not required in this report.

Declaration of Conformity:

The test results with all measurement uncertainty excluded is presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

17. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [6] FCC KDB 941225 D01 v03r01, "3G SAR MEAUREMENT PROCEDURES", Oct 2015
- [7] FCC KDB 941225 D05 v02r05, "SAR Evaluation Considerations for LTE Devices", Dec 2015
- [8] FCC KDB 941225 D05A v01r02, "Rel. 10 LTE SAR Test Guidance and KDB Inquiries", Oct 2015
- [9] FCC KDB 616217 D04 v01r02, "SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers", Oct 2015
- [10] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [11] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.