



FCC RF Test Report

APPLICANT : Quetel Wireless Solutions Co., Ltd.
EQUIPMENT : Wi-Fi & Bluetooth Module
BRAND NAME : Quetel
MODEL NAME : FCU743R
FCC ID : XMR2024FCU743R
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure
TEST DATE(S) : Jun. 19, 2024 ~ Jul. 08, 2024

We, Sporton International Inc.(ShenZhen), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc.(ShenZhen), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (ShenZhen)

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055

People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION 5

 1.1 Applicant 5

 1.2 Manufacturer..... 5

 1.3 Product Feature of Equipment Under Test..... 5

 1.4 Product Specification of Equipment Under Test..... 6

 1.5 Modification of EUT 7

 1.6 Testing Location 7

 1.7 Test Software..... 7

 1.8 Applicable Standards..... 8

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 9

 2.1 Carrier Frequency and Channel 9

 2.2 Test Mode..... 10

 2.3 Connection Diagram of Test System..... 10

 2.4 Support Unit used in test configuration and system 11

 2.5 EUT Operation Test Setup 11

 2.6 Measurement Results Explanation Example..... 11

3 TEST RESULT 12

 3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement 12

 3.2 Maximum Conducted Output Power Measurement 16

 3.3 Power Spectral Density Measurement 18

 3.4 Unwanted Emissions Measurement 21

 3.5 AC Conducted Emission Measurement..... 26

 3.6 Antenna Requirements 28

4 LIST OF MEASURING EQUIPMENT 29

5 MEASUREMENT UNCERTAINTY 30

APPENDIX A. CONDUCTED TEST RESULTS

APPENDIX B. AC CONDUCTED EMISSION TEST RESULT

APPENDIX C. RADIATED SPURIOUS EMISSION

APPENDIX D. DUTY CYCLE PLOTS

APPENDIX E. SETUP PHOTOGRAPHS



SUMMARY OF TEST RESULT

| Report Section | FCC Rule | Description | Limit for U-NII-1/2A/2C | Limit for U-NII-3 | Result | Remark |
|----------------|--------------------|--------------------------------|-------------------------|-----------------------------|--------|------------------------------------|
| 3.1 | 2.1049 & 15.403(i) | 6dB, 26dB & 99% Bandwidth | - | 6dB Bandwidth > 500kHz | Pass | - |
| 3.2 | 15.407(a) | Maximum Conducted Output Power | ≤ 24 dBm | ≤ 30 dBm | Pass | - |
| 3.3 | 15.407(a) | Power Spectral Density | ≤ 11 dBm/MHz | ≤ 30 dBm/500kHz | Pass | - |
| 3.4 | 15.407(b) | Unwanted Emissions | 15.407(b) & 15.209(a) | 15.407(b)(4)(i) & 15.209(a) | Pass | Under limit 3.08 dB at 5149.99 MHz |
| 3.5 | 15.207 | AC Conducted Emission | 15.207(a) | 15.207(a) | Pass | Under limit 8.98 dB at 0.16 MHz |
| 3.6 | 15.203 & 15.407(a) | Antenna Requirement | 15.203 & 15.407(a) | 15.203 & 15.407(a) | Pass | - |

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Quectel Wireless Solutions Co., Ltd.

Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai 200233, China

1.2 Manufacturer

Quectel Wireless Solutions Co., Ltd.

Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai 200233, China

1.3 Product Feature of Equipment Under Test

| Product Feature | |
|-----------------|-----------------------------------------------------------------------------------------|
| Equipment | Wi-Fi & Bluetooth Module |
| Brand Name | Quectel |
| Model Name | FCU743R |
| FCC ID | XMR2024FCU743R |
| SN | Conducted: E1M24DD05000036 Conduction: E1M24DD05000013 Radiation: E1M24DD05000036 |
| HW Version | R1.0 |
| SW Version | NA |
| EUT Stage | Identical Prototype |

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



1.4 Product Specification of Equipment Under Test

| Standards-related Product Specification | |
|-----------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Tx/Rx Frequency Range | 5180 MHz ~ 5240 MHz 5260 MHz ~ 5320 MHz 5500 MHz ~ 5700 MHz 5745 MHz ~ 5825 MHz |
| Maximum Output Power to Antenna | <p><5180 MHz ~ 5240 MHz> 802.11a : 19.26 dBm / 0.0843 W 802.11n HT20 : 18.23 dBm / 0.0665 W 802.11n HT40 : 18.11 dBm / 0.0647 W</p> <p><5260 MHz ~ 5320 MHz> 802.11a : 19.65 dBm / 0.0923 W 802.11n HT20 : 18.54 dBm / 0.0714 W 802.11n HT40 : 18.56 dBm / 0.0718 W</p> <p><5500 MHz ~ 5700 MHz > 802.11a : 19.24 dBm / 0.0839 W 802.11n HT20 : 18.12 dBm / 0.0649 W 802.11n HT40 : 18.21 dBm / 0.0662 W</p> <p><5745 MHz ~ 5825 MHz> 802.11a : 18.78 dBm / 0.0755 W 802.11n HT20 : 17.59 dBm / 0.0574 W 802.11n HT40 : 17.66 dBm / 0.0583 W</p> |
| 99% Occupied Bandwidth | <p><5180 MHz ~ 5240 MHz> 802.11a : 16.58 MHz 802.11n HT20 : 17.63 MHz 802.11n HT40 : 35.66 MHz</p> <p><5260 MHz ~ 5320 MHz> 802.11a : 16.63 MHz 802.11n HT20 : 17.63 MHz 802.11n HT40 : 35.76 MHz</p> <p><5500 MHz ~ 5700 MHz> 802.11a : 16.63 MHz 802.11n HT20 : 17.58 MHz 802.11n HT40 : 35.76 MHz</p> <p><5745 MHz ~ 5825 MHz> 802.11a : 16.63 MHz 802.11n HT20 : 17.63 MHz 802.11n HT40 : 35.76 MHz</p> |
| Antenna Type / Gain | <p><5180 MHz ~ 5240 MHz> Dipole Antenna type with gain -0.7 dBi</p> <p><5260 MHz ~ 5320 MHz> Dipole Antenna type with gain -0.8 dBi</p> <p><5500 MHz ~ 5700 MHz> Dipole Antenna type with gain -1.2 dBi</p> <p><5745 MHz ~ 5825 MHz> Dipole Antenna type with gain -1.5 dBi</p> |
| Type of Modulation | 802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) |



1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

| | | | |
|---------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------------------------------------|
| Test Firm | Sporton International Inc. (ShenZhen) | | |
| Test Site Location | 1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595 | | |
| Test Site No. | Sporton Site No. | FCC Designation No. | FCC Test Firm Registration No. |
| | CO01-SZ TH01-SZ | CN1256 | 421272 |

| | | | |
|---------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------------------------------------|
| Test Firm | Sporton International Inc. (ShenZhen) | | |
| Test Site Location | 101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985 | | |
| Test Site No. | Sporton Site No. | FCC Designation No. | FCC Test Firm Registration No. |
| | 03CH01-SZ | CN1256 | 421272 |

1.7 Test Software

| Item | Site | Manufacturer | Name | Version |
|------|-----------|--------------|------|-------------|
| 1. | 03CH01-SZ | AUDIX | E3 | 6.2009-8-24 |
| 2. | CO01-SZ | AUDIX | E3 | 6.120613b |



1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ ANSI C63.10-2013

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.



2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

| Frequency Band | Channel | Freq.(MHz) | Channel | Freq. (MHz) |
|--------------------------|---------|------------|---------|-------------|
| 5180-5240 MHz U-NII-1 | 36 | 5180 | 44 | 5220 |
| | 38* | 5190 | 46* | 5230 |
| | 40 | 5200 | 48 | 5240 |

| Frequency Band | Channel | Freq.(MHz) | Channel | Freq. (MHz) |
|---------------------------|---------|------------|---------|-------------|
| 5260-5320 MHz U-NII-2A | 52 | 5260 | 60 | 5300 |
| | 54* | 5270 | 62* | 5310 |
| | 56 | 5280 | 64 | 5320 |

| Frequency Band | Channel | Freq.(MHz) | Channel | Freq. (MHz) |
|--------------------------|---------|------------|---------|-------------|
| 5500-5700MHz U-NII-2C | 100 | 5500 | 116 | 5580 |
| | 102* | 5510 | 132 | 5660 |
| | 104 | 5520 | 134* | 5670 |
| | 108 | 5540 | 136 | 5680 |
| | 110* | 5550 | 140 | 5700 |
| | 112 | 5560 | - | - |

| Frequency Band | Channel | Freq.(MHz) | Channel | Freq. (MHz) |
|--------------------------|---------|------------|---------|-------------|
| 5745-5825 MHz U-NII-3 | 149 | 5745 | 159* | 5795 |
| | 151* | 5755 | 161 | 5805 |
| | 153 | 5765 | 165 | 5825 |
| | 157 | 5785 | - | - |

| Frequency Band | Channel | Freq.(MHz) | Channel | Freq. (MHz) |
|----------------|---------|------------|---------|-------------|
| TDWR Channel | 118* | 5590 | 124 | 5620 |
| | 120 | 5600 | 126* | 5630 |
| | - | - | 128 | 5640 |

Note: The above Frequency and Channel in "*" are 40MHz bandwidth.

2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.


SISO Mode

| Modulation | Data Rate |
|--------------|-----------|
| 802.11a | 6 Mbps |
| 802.11n HT20 | MCS0 |
| 802.11n HT40 | MCS0 |

| | |
|------------------------------|---------------------------------------------------------|
| AC Conducted Emission | Mode 1 : BT Link + WIFI 5G Link + Powered from Test Jig |
|------------------------------|---------------------------------------------------------|

Remark: For Radiated Test Cases, The tests were performance with Test Jig.

2.3 Connection Diagram of Test System

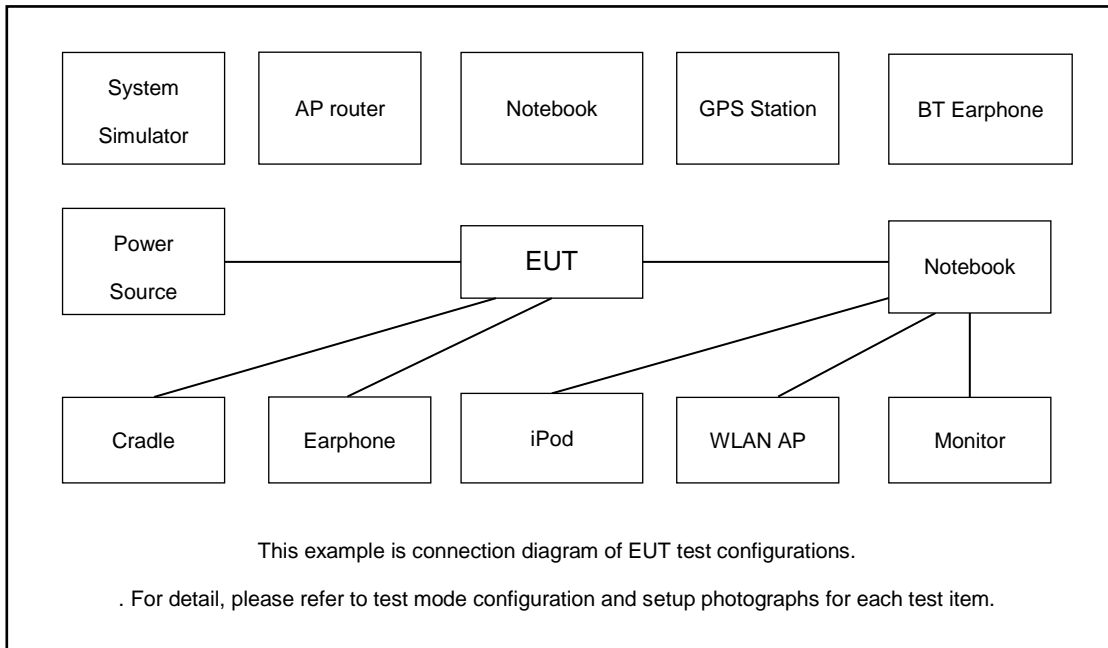



2.4 Support Unit used in test configuration and system

| Item | Equipment | Trade Name | Model Name | FCC ID | Data Cable | Power Cord |
|------|-----------|------------|------------|-------------|------------|------------------------------------------------------------|
| 1. | NOTE BOOK | DELL | 3400 | FCC DoC | N/A | AC I/P : Unshielded, 1.2m DC O/P : Shielded, 1.8m |
| 2. | WLAN AP | Dlink | DIR-820L | KA2IR820LA1 | N/A | Unshielded,1.8m |
| 3. | lopd | apple | MC69029/A | N/A | N/A | N/A |
| 4. | Test Jig | Quectel | N/A | N/A | N/A | N/A |

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuously transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

$$\text{Offset} = \text{RF cable loss} + \text{attenuator factor}.$$

Following shows an offset computation example with cable loss 5.00 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 5.00 + 10 = 15.00 \text{ (dB)} \end{aligned}$$



3 Test Result

3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.



3.1.2 Measuring Instruments



The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

- 1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

| | |
|-------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <input checked="" type="checkbox"/> | Section C) Bandwidth Measurement 1. Emission Bandwidth (EBW) and 99% OBW |
| | <ol style="list-style-type: none"> 1. Set RBW = approximately 1% of the emission bandwidth. 2. Set the VBW > RBW. 3. Detector = Peak. 4. Trace mode = max hold 5. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%. 6. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set to 1%~5% of the OBW and set the Video bandwidth (VBW) ≥ 3 * RBW. 7. Measure and record the results in the test report. |
| <input checked="" type="checkbox"/> | Section C) Bandwidth Measurement 2. Minimum Emission Bandwidth for the band 5.725 - 5.85 GHz |
| | <ol style="list-style-type: none"> 1. Set RBW = 100kHz. 2. Set the VBW ≥ 3 x RBW. 3. Detector = Peak. 4. Trace mode = max hold 5. Measure the maximum width of the emission that is 6 dB down from the peak of the emission. 6. Measure and record the results in the test report. |

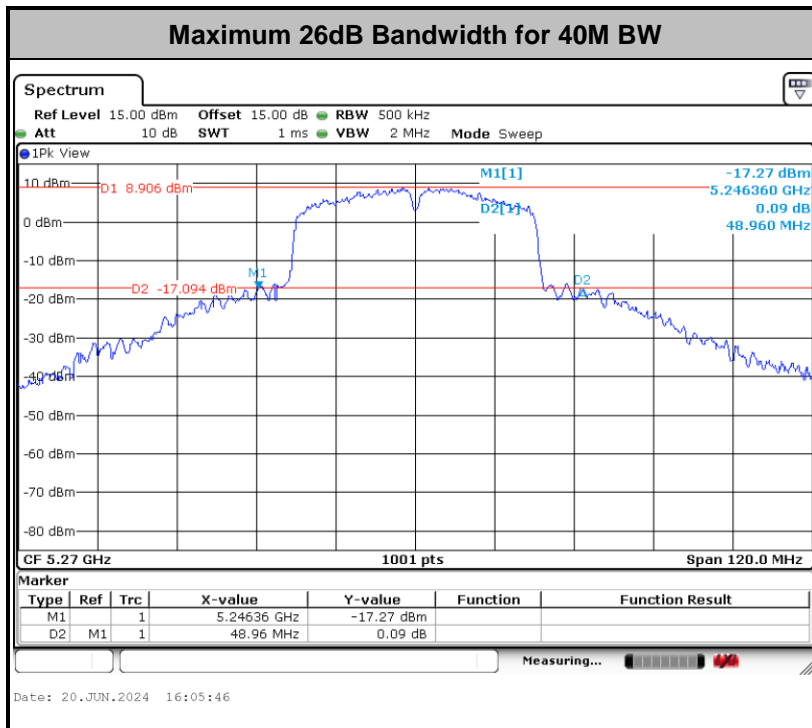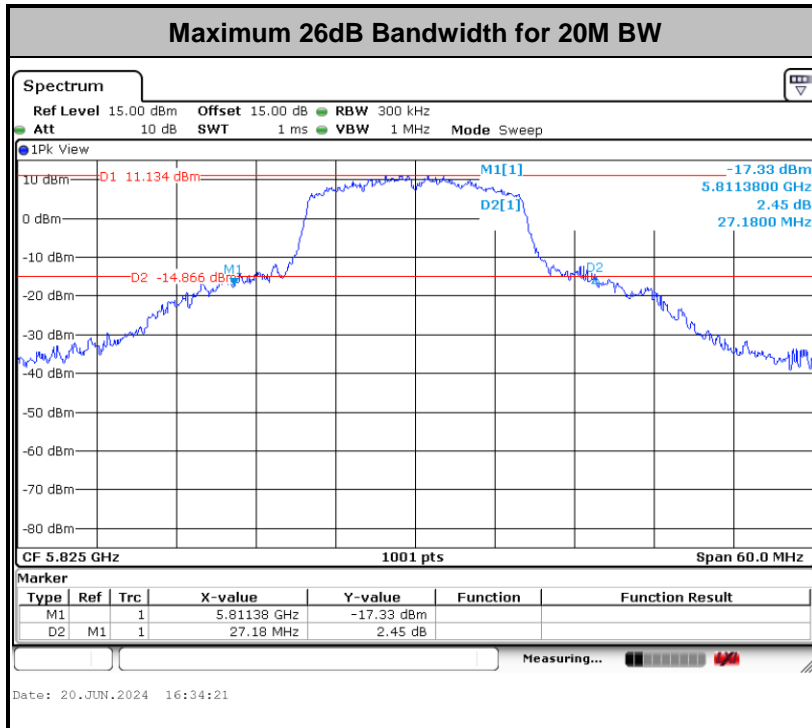

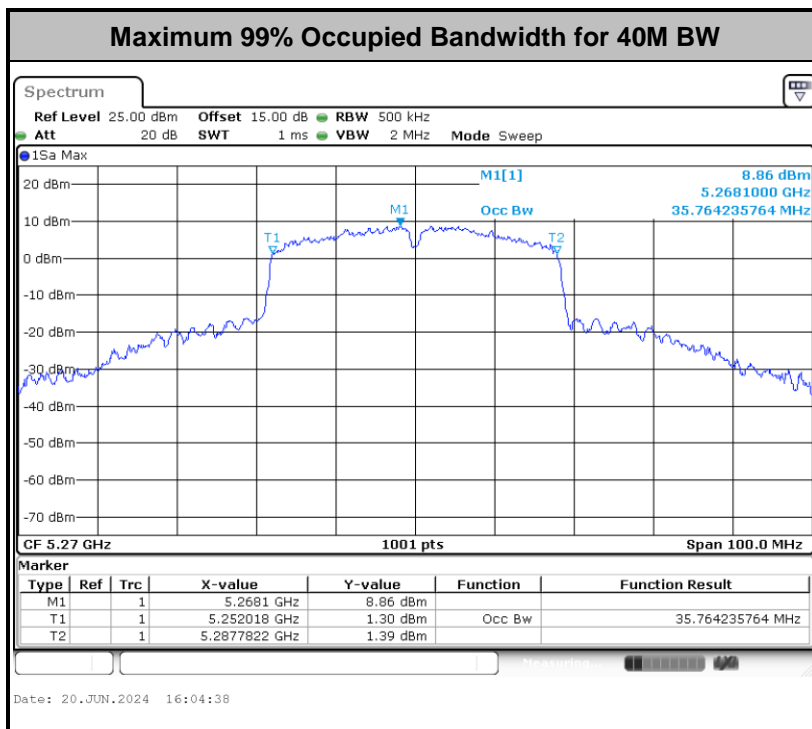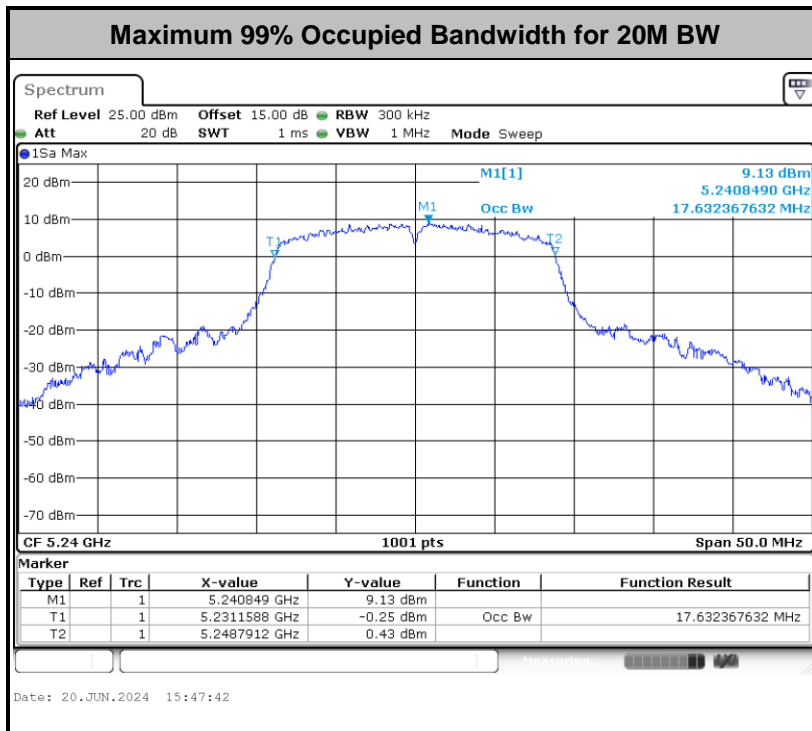

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.



3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW.

For the 5.25–5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log_{10} B$, where B is the 26 dB emission bandwidth in megahertz.

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.

3.2.4 Test Setup

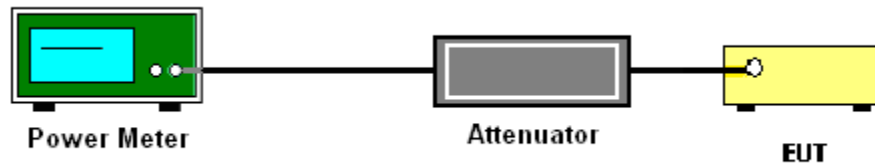

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

For the 5.25–5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04. Section F) Maximum power spectral density.

For devices operating in the bands UNII-1/2A/2C

Method SA-2


(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz.
- Set VBW \geq 3 MHz.
- Number of points in sweep \geq 2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

For devices operating in the band UNII-3**# Method SA-2 #**

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).


- Measure the duty cycle.
 - Set span to encompass the entire emission bandwidth (EBW) of the signal.
 - Set RBW = 500KHz (or 300 kHz if the SA can't set RBW=500KHz).
 - Set VBW \geq 1 MHz.
 - Number of points in sweep \geq 2 Span / RBW.
 - Sweep time = auto.
 - Detector = RMS
 - Trace average at least 100 traces in power averaging mode.
 - If the SA can't set RBW=500KHz, then add $10 \log(500\text{kHz}/\text{RBW})$ to the test result.
 - Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.
1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
 2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.

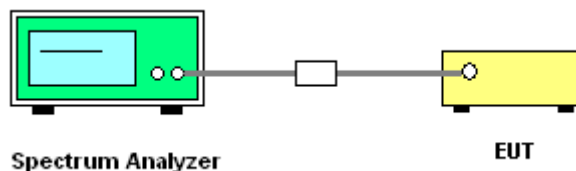3.3.4 Test Setup**3.3.5 Test Result of Power Spectral Density**

Please refer to Appendix A.




For UNII-1/2A/2C

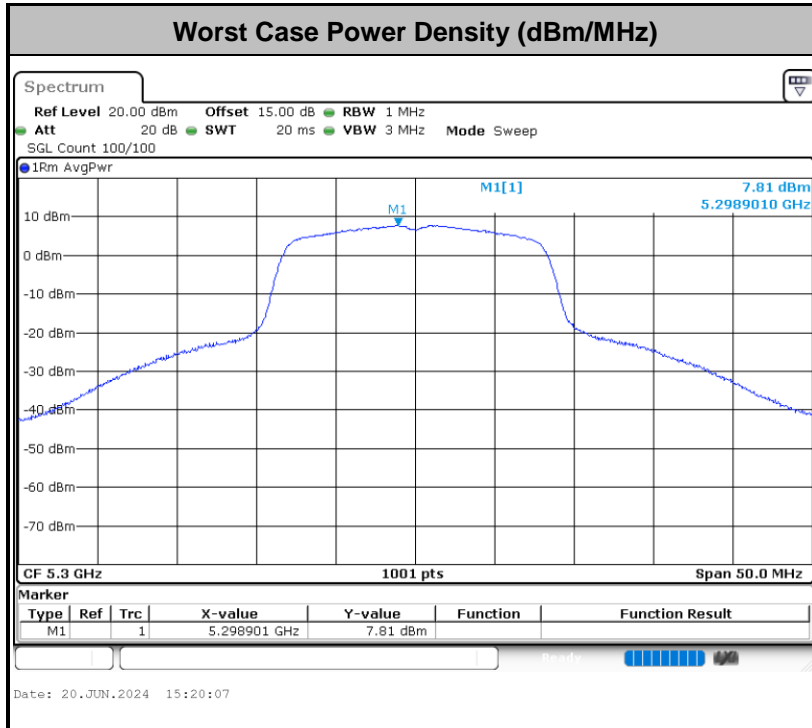

Note: Average Power Density (dB) = Measured value+ Duty Factor

For UNII-3

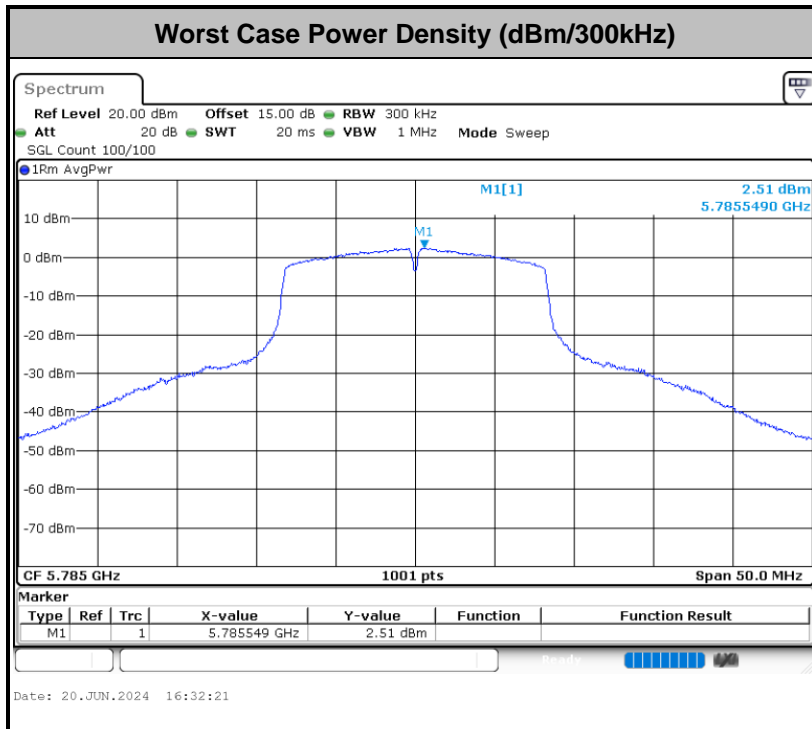

Note: Average Power Density (dB) = Measured value + Duty Factor + RBW offset.



3.4 Unwanted Emissions Measurement

This section as specified in FCC Part 15.407(b) is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement. The unwanted emissions shall comply with 15.407(b)(1) to (6), and restricted bands per FCC Part 15.205.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27dBm/MHz .

For transmitters operating in the 5250-5350 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27 dBm/MHz . Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band must meet all applicable technical requirements for operation in the 5150-5250 MHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5150-5250 MHz band.

For transmitters operating in the 5470-5600 MHz and 5650-5725MHz band: all emissions outside of the 5470-5600 MHz and 5650-5725MHz band shall not exceed an EIRP of -27 dBm/MHz .

- (2) For transmitters operating in the 5.725-5.85 GHz band:
15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(3) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

| Frequency (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|-----------------|-----------------------------------|-------------------------------|
| 0.009 – 0.490 | 2400/F(kHz) | 300 |
| 0.490 – 1.705 | 24000/F(kHz) | 30 |
| 1.705 – 30.0 | 30 | 30 |
| 30 – 88 | 100 | 3 |
| 88 – 216 | 150 | 3 |
| 216 - 960 | 200 | 3 |
| Above 960 | 500 | 3 |

| (4) EIRP (dBm) | Field Strength at 3m (dBµV/m) |
|----------------|-------------------------------|
| - 27 | 68.2 |

Note: The following formula is used to convert the EIRP to field strength.

$$EIRP = E_{Meas} + 20\log (d_{Meas}) - 104.7$$

where

EIRP is the equivalent isotropically radiated power, in dBm

E_{Meas} is the field strength of the emission at the measurement distance, in dBµV/m

d_{Meas} is the measurement distance, in m

(4) ANSI C63.10-2013 clause 12.7.3 note 97

As specified by regulatory requirements, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit. However, an out-of-band emission that complies with both the average and peak general regulatory limits is not required to satisfy the peak emission limit.

3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.4.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04. Section G) Unwanted emissions measurement.
 - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
 - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW \geq 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
 - (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW \geq 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For radiated emissions below 30MHz

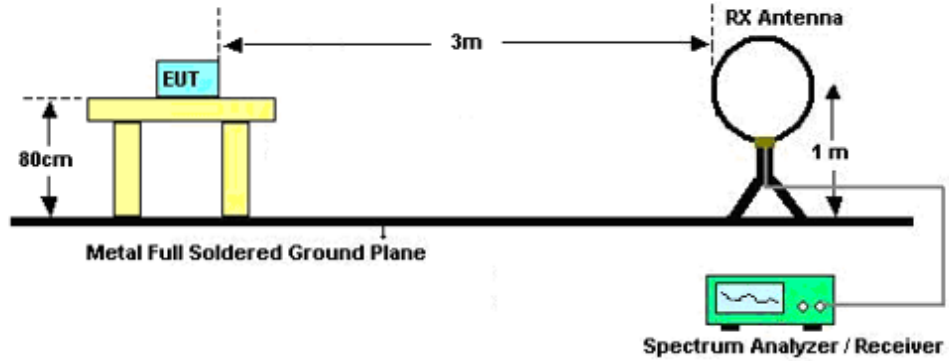

For radiated emissions from 30MHz to 1GHz

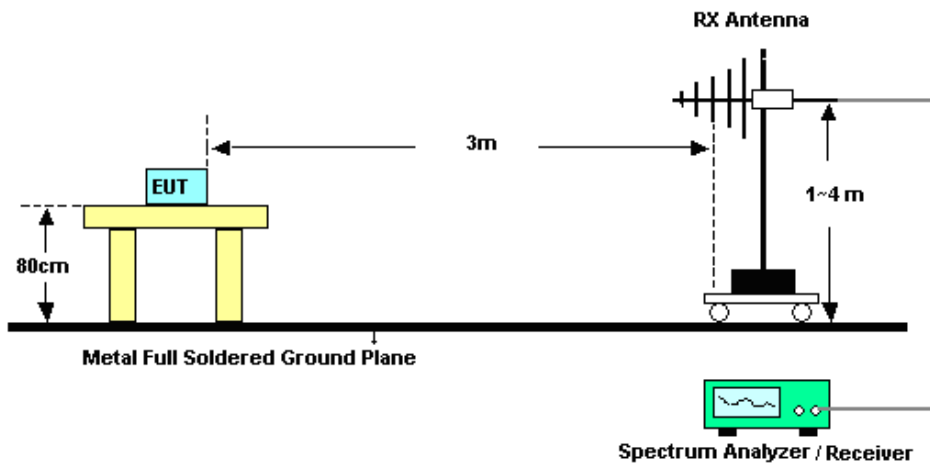

For radiated emissions above 1GHz

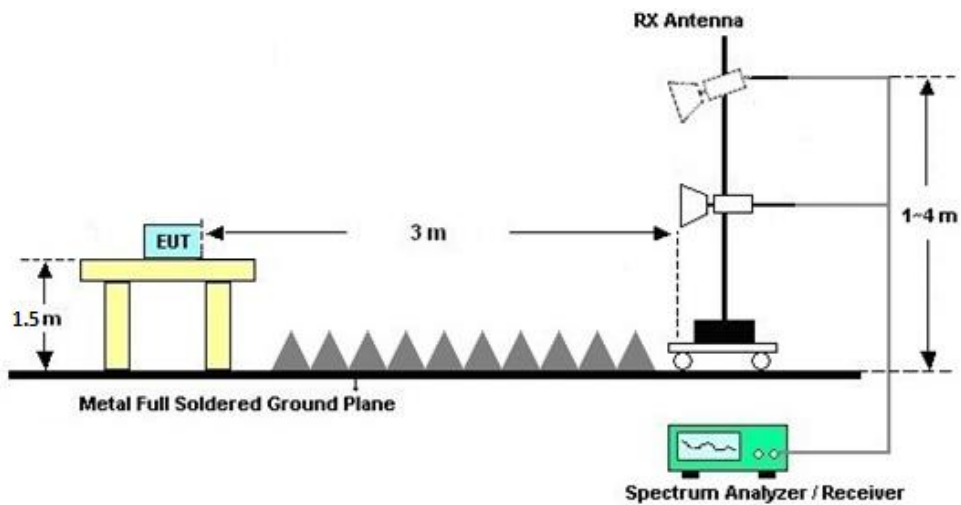



3.4.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.4.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.4.7 Duty Cycle

Please refer to Appendix D.

3.4.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix C.



3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

| Frequency of emission (MHz) | Conducted limit (dBµV) | |
|-----------------------------|------------------------|-----------|
| | Quasi-peak | Average |
| 0.15-0.5 | 66 to 56* | 56 to 46* |
| 0.5-5 | 56 | 46 |
| 5-30 | 60 | 50 |

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

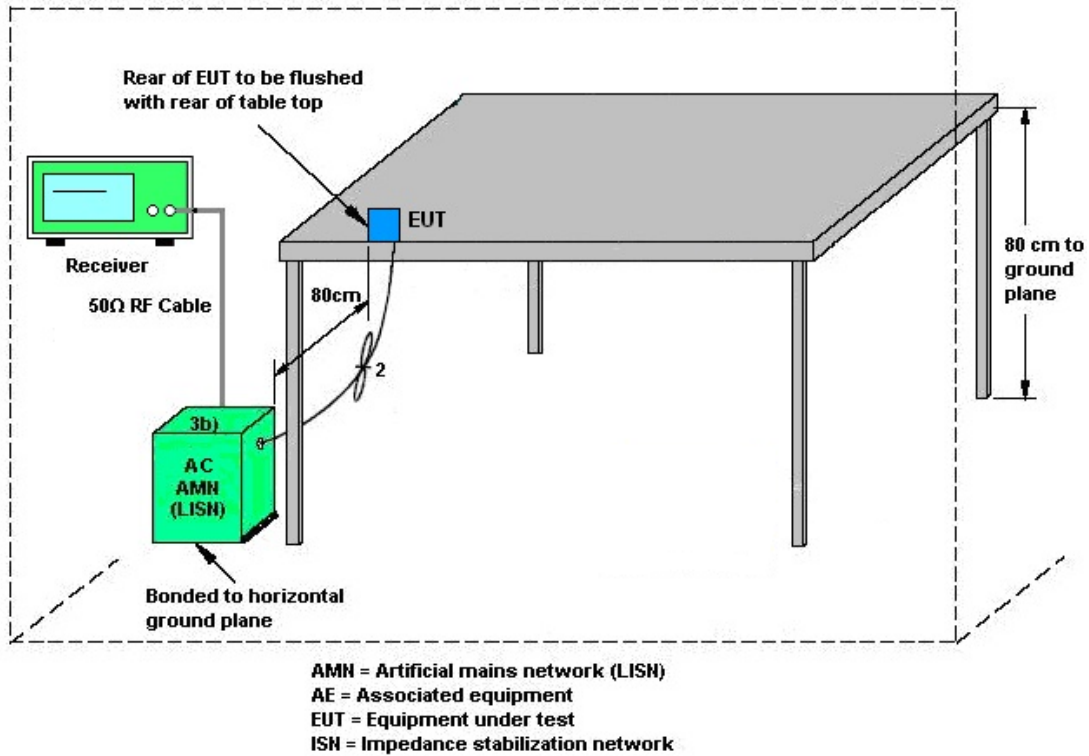

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.6 Antenna Requirements

3.6.1 Standard Applicable

According to FCC 47 CFR Section 15.407(a)(1)(2), if transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.6.2 Antenna Anti-Replacement Construction

Non-standard antenna connector is used.

3.6.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

| Instrument | Manufacturer | Model No. | Serial No. | Characteristics | Calibration Date | Test Date | Due Date | Remark |
|-----------------------------------|--------------|------------------------------|------------------|-----------------|------------------|---------------|---------------|-----------------------|
| EMI Test Receiver&SA | Agilent | N9038A | MY52260185 | 20Hz~26.5GHz | Dec. 27, 2023 | Jun. 19, 2024 | Dec. 26, 2024 | Radiation (03CH01-SZ) |
| EXA Spectrum Analyzer | KEYSIGHT | N9010A | MY55150213 | 10Hz~44GHz | Jul. 07, 2023 | Jun. 19, 2024 | Jul. 06, 2024 | Radiation (03CH01-SZ) |
| Loop Antenna | R&S | HFH2-Z2 | 100354 | 9kHz~30MHz | Jul. 28, 2022 | Jun. 19, 2024 | Jul. 27, 2024 | Radiation (03CH01-SZ) |
| Bilog Antenna | TeseQ | CBL6112D | 35407 | 30MHz~2GHz | Oct. 24, 2023 | Jun. 19, 2024 | Oct. 23, 2025 | Radiation (03CH01-SZ) |
| Double Ridge Horn Antenna | ETS-Lindgren | 3117 | 00119436 | 1GHz~18GHz | Jul. 08, 2023 | Jun. 19, 2024 | Jul. 07, 2024 | Radiation (03CH01-SZ) |
| SHF-EHF Horn | com-power | AH-840 | 101071 | 18GHz~40GHz | Apr. 09, 2024 | Jun. 19, 2024 | Apr. 08, 2025 | Radiation (03CH01-SZ) |
| LF Amplifier | Burgeon | BPA-530 | 102209 | 0.01~3000Mhz | Apr. 09, 2024 | Jun. 19, 2024 | Apr. 08, 2025 | Radiation (03CH01-SZ) |
| HF Amplifier | MITEQ | AMF-7D-0010 1800-30-10P-R | 1943528 | 1GHz~18GHz | Oct. 18, 2023 | Jun. 19, 2024 | Oct. 17, 2024 | Radiation (03CH01-SZ) |
| HF Amplifier | KEYSIGHT | 83017A | MY53270105 | 0.5GHz~26.5GHz | Oct. 18, 2023 | Jun. 19, 2024 | Oct. 17, 2024 | Radiation (03CH01-SZ) |
| HF Amplifier | MITEQ | TTA1840-35-H G | 1871923 | 18GHz~40GHz | Jul. 07, 2023 | Jun. 19, 2024 | Jul. 06, 2024 | Radiation (03CH01-SZ) |
| AC Power Source | Chroma | 61601 | 61601000198 5 | N/A | Oct. 18, 2023 | Jun. 19, 2024 | Oct. 17, 2024 | Radiation (03CH01-SZ) |
| Turn Table | EM | EM1000 | N/A | 0~360 degree | NCR | Jun. 19, 2024 | NCR | Radiation (03CH01-SZ) |
| Antenna Mast | EM | EM1000 | N/A | 1 m~4 m | NCR | Jun. 19, 2024 | NCR | Radiation (03CH01-SZ) |
| EMI Test Receiver | R&S | ESR7 | 102261 | 9kHz~7GHz | Apr. 09, 2024 | Jul. 08, 2024 | Apr. 08, 2025 | Conduction (CO01-SZ) |
| AC LISN | R&S | ENV216 | 100063 | 9kHz~30MHz | Aug. 21, 2023 | Jul. 08, 2024 | Aug. 20, 2024 | Conduction (CO01-SZ) |
| AC LISN (for auxiliary equipment) | EMCO | 3816/2SH | 00103892 | 9kHz~30MHz | Oct. 16, 2023 | Jul. 08, 2024 | Oct. 15, 2024 | Conduction (CO01-SZ) |
| AC Power Source | APC | AFV-S-600 | F119050013 | N/A | Oct. 18, 2023 | Jul. 08, 2024 | Oct. 17, 2024 | Conduction (CO01-SZ) |
| Spectrum Analyzer | R&S | FSV40 | 101078 | 10Hz~40GHz | Apr. 09, 2024 | Jun. 20, 2024 | Apr. 08, 2025 | Conducted (TH01-SZ) |
| Pulse Power Sensor | Anritsu | MA2411B | 1339473 | 30MHz~40GHz | Dec. 29, 2023 | Jun. 20, 2024 | Dec. 28, 2024 | Conducted (TH01-SZ) |
| Power Meter | Anritsu | ML2495A | 1218010 | 50MHz Bandwidth | Aug. 21, 2023 | Jun. 20, 2024 | Aug. 20, 2024 | Conducted (TH01-SZ) |

NCR: No Calibration Required



5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

| Test Item | Uncertainty |
|----------------------------------------|-------------|
| Conducted Spurious Emission & Bandedge | ±1.34 dB |
| Occupied Channel Bandwidth | ±0.012 MHz |
| Conducted Power | ±1.34 dB |
| Conducted Power Spectral Density | ±1.32 dB |
| Frequency | ±1.3 Hz |

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

| | |
|---------------------------------------------------------------------|--------|
| Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y)) | 2.5 dB |
|---------------------------------------------------------------------|--------|

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

| | |
|---------------------------------------------------------------------|--------|
| Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y)) | 2.8 dB |
|---------------------------------------------------------------------|--------|

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

| | |
|---------------------------------------------------------------------|--------|
| Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y)) | 4.2 dB |
|---------------------------------------------------------------------|--------|

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

| | |
|---------------------------------------------------------------------|--------|
| Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y)) | 5.0 dB |
|---------------------------------------------------------------------|--------|

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

| | |
|---------------------------------------------------------------------|--------|
| Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y)) | 4.3 dB |
|---------------------------------------------------------------------|--------|

----- THE END -----



Appendix A. Conducted Test Results

Appendix A. Test Result of Conducted Test Items

| | | | | |
|----------------|-----------|--------------------|-------|----|
| Test Engineer: | PiShun | Temperature: | 21~25 | °C |
| Test Date: | 2024/6/20 | Relative Humidity: | 51~54 | % |

TEST RESULTS DATA
26dB and 99% OBW

| <5180 MHz ~ 5240 MHz> | | | | | | | | | | |
|-----------------------|-----------|-----|-----|-------------|---------------------|-----------------------|---|-----------------------------------|--|--|
| Mod. | Data Rate | NTX | CH. | Freq. (MHz) | 99% Bandwidth (MHz) | 26 dB Bandwidth (MHz) | | IC 99% Bandwidth EIRP Limit (dBm) | | |
| 11a | 6Mbps | 1 | 36 | 5180 | 16.58 | 26.88 | - | 22.20 | | |
| 11a | 6Mbps | 1 | 44 | 5220 | 16.58 | 26.88 | - | 22.20 | | |
| 11a | 6Mbps | 1 | 48 | 5240 | 16.58 | 26.82 | - | 22.20 | | |
| HT20 | MCS0 | 1 | 36 | 5180 | 17.63 | 21.48 | - | 22.46 | | |
| HT20 | MCS0 | 1 | 44 | 5220 | 17.58 | 21.54 | - | 22.45 | | |
| HT20 | MCS0 | 1 | 48 | 5240 | 17.63 | 21.36 | - | 22.46 | | |
| HT40 | MCS0 | 1 | 38 | 5190 | 35.66 | 48.84 | - | 23.01 | | |
| HT40 | MCS0 | 1 | 46 | 5230 | 35.66 | 45.00 | - | 23.01 | | |

TEST RESULTS DATA
Average Power Table

| <5180 MHz ~ 5240 MHz> | | | | | | | | | | | |
|-----------------------|-----------|-----------------|-----|-------------|------------------|-------------------------------|---------------------------------|----------|--|-----------|---------------|
| Mod. | Data Rate | N _{TX} | CH. | Freq. (MHz) | Duty Factor (dB) | Average Conducted Power (dBm) | FCC Conducted Power Limit (dBm) | DG (dBi) | | Pass/Fail | Power Setting |
| 11a | 6Mbps | 1 | 36 | 5180 | 1.36 | 18.77 | 24.00 | -0.70 | | Pass | 18.5 |
| 11a | 6Mbps | 1 | 44 | 5220 | 1.36 | 19.26 | 24.00 | -0.70 | | Pass | 19 |
| 11a | 6Mbps | 1 | 48 | 5240 | 1.36 | 19.18 | 24.00 | -0.70 | | Pass | 19 |
| HT20 | MCS0 | 1 | 36 | 5180 | 1.47 | 18.23 | 24.00 | -0.70 | | Pass | 18 |
| HT20 | MCS0 | 1 | 44 | 5220 | 1.47 | 18.12 | 24.00 | -0.70 | | Pass | 18 |
| HT20 | MCS0 | 1 | 48 | 5240 | 1.47 | 18.18 | 24.00 | -0.70 | | Pass | 18 |
| HT40 | MCS0 | 1 | 38 | 5190 | 2.59 | 15.17 | 24.00 | -0.70 | | Pass | 15 |
| HT40 | MCS0 | 1 | 46 | 5230 | 2.59 | 18.11 | 24.00 | -0.70 | | Pass | 18 |

TEST RESULTS DATA
Power Spectral Density

| <5180 MHz ~ 5240 MHz> | | | | | | | | | | |
|-----------------------|-----------|-----|-----|-------------|------------------|---------------------------------|-----------------------------|----------|---|-----------|
| Mod. | Data Rate | NTX | CH. | Freq. (MHz) | Duty Factor (dB) | Average Power Density (dBm/MHz) | Average PSD Limit (dBm/MHz) | DG (dBi) | - | Pass/Fail |
| 11a | 6Mbps | 1 | 36 | 5180 | 1.36 | 8.51 | 11.00 | -0.70 | | Pass |
| 11a | 6Mbps | 1 | 44 | 5220 | 1.36 | 8.35 | 11.00 | -0.70 | | Pass |
| 11a | 6Mbps | 1 | 48 | 5240 | 1.36 | 8.58 | 11.00 | -0.70 | | Pass |
| HT20 | MCS0 | 1 | 36 | 5180 | 1.47 | 6.98 | 11.00 | -0.70 | | Pass |
| HT20 | MCS0 | 1 | 44 | 5220 | 1.47 | 7.53 | 11.00 | -0.70 | | Pass |
| HT20 | MCS0 | 1 | 48 | 5240 | 1.47 | 7.32 | 11.00 | -0.70 | | Pass |
| HT40 | MCS0 | 1 | 38 | 5190 | 2.59 | 3.77 | 11.00 | -0.70 | | Pass |
| HT40 | MCS0 | 1 | 46 | 5230 | 2.59 | 3.99 | 11.00 | -0.70 | | Pass |

TEST RESULTS DATA
26dB and 99% OBW

| <5260 MHz ~ 5320 MHz> | | | | | | | | | | |
|-----------------------|-----------|-----|-----|-------------|---------------------|-----------------------|------------------------------------|-----------------------------------|--------------------------------------|------|
| Mod. | Data Rate | NTX | CH. | Freq. (MHz) | 99% Bandwidth (MHz) | 26 dB Bandwidth (MHz) | IC 99% Bandwidth Power Limit (dBm) | IC 99% Bandwidth EIRP Limit (dBm) | FCC 26dB Bandwidth Power Limit (dBm) | Note |
| 11a | 6M bps | 1 | 52 | 5260 | 16.58 | 27.12 | 23.20 | 29.20 | 23.98 | |
| 11a | 6M bps | 1 | 60 | 5300 | 16.63 | 26.88 | 23.21 | 29.21 | 23.98 | |
| 11a | 6M bps | 1 | 64 | 5320 | 16.63 | 26.94 | 23.21 | 29.21 | 23.98 | |
| HT20 | MCS 0 | 1 | 52 | 5260 | 17.63 | 21.54 | 23.46 | 29.46 | 23.98 | |
| HT20 | MCS 0 | 1 | 60 | 5300 | 17.63 | 21.48 | 23.46 | 29.46 | 23.98 | |
| HT20 | MCS 0 | 1 | 64 | 5320 | 17.63 | 21.30 | 23.46 | 29.46 | 23.98 | |
| HT40 | MCS 0 | 1 | 54 | 5270 | 35.76 | 48.96 | 23.98 | 30.00 | 23.98 | |
| HT40 | MCS 0 | 1 | 62 | 5310 | 35.76 | 48.96 | 23.98 | 30.00 | 23.98 | |

TEST RESULTS DATA
Average Power Table

| <5260 MHz ~ 5320 MHz> | | | | | | | | | | | |
|-----------------------|-----------|-----------------|-----|-------------|------------------|-------------------------------|---------------------------------|----------|------------------------|-----------|---------------|
| Mod. | Data Rate | N _{TX} | CH. | Freq. (MHz) | Duty Factor (dB) | Average Conducted Power (dBm) | FCC Conducted Power Limit (dBm) | DG (dBi) | EIRP Power Limit (dBm) | Pass/Fail | Power Setting |
| 11a | 6M bps | 1 | 52 | 5260 | 1.36 | 19.65 | 23.98 | -0.80 | 30.00 | Pass | 19 |
| 11a | 6M bps | 1 | 60 | 5300 | 1.36 | 19.56 | 23.98 | -0.80 | 30.00 | Pass | 19 |
| 11a | 6M bps | 1 | 64 | 5320 | 1.36 | 19.55 | 23.98 | -0.80 | 30.00 | Pass | 19 |
| HT20 | MCS 0 | 1 | 52 | 5260 | 1.47 | 18.50 | 23.98 | -0.80 | 30.00 | Pass | 18 |
| HT20 | MCS 0 | 1 | 60 | 5300 | 1.47 | 18.54 | 23.98 | -0.80 | 30.00 | Pass | 18 |
| HT20 | MCS 0 | 1 | 64 | 5320 | 1.47 | 18.48 | 23.98 | -0.80 | 30.00 | Pass | 18 |
| HT40 | MCS 0 | 1 | 54 | 5270 | 2.59 | 18.56 | 23.98 | -0.80 | 30.00 | Pass | 18 |
| HT40 | MCS 0 | 1 | 62 | 5310 | 2.59 | 16.01 | 23.98 | -0.80 | 30.00 | Pass | 15.5 |

TEST RESULTS DATA
Power Spectral Density

| <5260 MHz ~ 5320 MHz> | | | | | | | | | | |
|-----------------------|-----------|-----|-----|-------------|------------------|---------------------------------|-----------------------------|----------|--|-----------|
| Mod. | Data Rate | NTX | CH. | Freq. (MHz) | Duty Factor (dB) | Average Power Density (dBm/MHz) | Average PSD Limit (dBm/MHz) | DG (dBi) | | Pass/Fail |
| 11a | 6M bps | 1 | 52 | 5260 | 1.36 | 9.10 | 11.00 | -0.80 | | Pass |
| 11a | 6M bps | 1 | 60 | 5300 | 1.36 | 9.17 | 11.00 | -0.80 | | Pass |
| 11a | 6M bps | 1 | 64 | 5320 | 1.36 | 8.79 | 11.00 | -0.80 | | Pass |
| HT20 | MCS 0 | 1 | 52 | 5260 | 1.47 | 8.71 | 11.00 | -0.80 | | Pass |
| HT20 | MCS 0 | 1 | 60 | 5300 | 1.47 | 7.57 | 11.00 | -0.80 | | Pass |
| HT20 | MCS 0 | 1 | 64 | 5320 | 1.47 | 7.33 | 11.00 | -0.80 | | Pass |
| HT40 | MCS 0 | 1 | 54 | 5270 | 2.59 | 4.67 | 11.00 | -0.80 | | Pass |
| HT40 | MCS 0 | 1 | 62 | 5310 | 2.59 | 4.60 | 11.00 | -0.80 | | Pass |

TEST RESULTS DATA
26dB and 99% OBW

| <5500 MHz ~ 5700 MHz > | | | | | | | | | | |
|------------------------|-----------|-----|-----|-------------|---------------------|-----------------------|------------------------------------|-----------------------------------|--------------------------------------|------|
| Mod. | Data Rate | NTX | CH. | Freq. (MHz) | 99% Bandwidth (MHz) | 26 dB Bandwidth (MHz) | IC 99% Bandwidth Power Limit (dBm) | IC 99% Bandwidth EIRP Limit (dBm) | FCC 26dB Bandwidth Power Limit (dBm) | Note |
| 11a | 6M bps | 1 | 100 | 5500 | 16.58 | 24.90 | 23.20 | 29.20 | 23.98 | |
| 11a | 6M bps | 1 | 116 | 5580 | 16.53 | 25.08 | 23.18 | 29.18 | 23.98 | |
| 11a | 6M bps | 1 | 140 | 5700 | 16.63 | 27.00 | 23.21 | 29.21 | 23.98 | |
| HT20 | MCS 0 | 1 | 100 | 5500 | 17.58 | 21.42 | 23.45 | 29.45 | 23.98 | |
| HT20 | MCS 0 | 1 | 116 | 5580 | 17.58 | 21.24 | 23.45 | 29.45 | 23.98 | |
| HT20 | MCS 0 | 1 | 140 | 5700 | 17.58 | 21.36 | 23.45 | 29.45 | 23.98 | |
| HT40 | MCS 0 | 1 | 102 | 5510 | 35.56 | 39.00 | 23.98 | 30.00 | 23.98 | |
| HT40 | MCS 0 | 1 | 110 | 5550 | 35.66 | 44.52 | 23.98 | 30.00 | 23.98 | |
| HT40 | MCS 0 | 1 | 134 | 5670 | 35.76 | 41.04 | 23.98 | 30.00 | 23.98 | |

TEST RESULTS DATA
Average Power Table

| <5500 MHz ~ 5700 MHz > | | | | | | | | | | | |
|------------------------|-----------|-----------------|-----|-------------|------------------|-------------------------------|---------------------------------|----------|------------------------|-----------|---------------|
| Mod. | Data Rate | N _{TX} | CH. | Freq. (MHz) | Duty Factor (dB) | Average Conducted Power (dBm) | FCC Conducted Power Limit (dBm) | DG (dBi) | EIRP Power Limit (dBm) | Pass/Fail | Power Setting |
| 11a | 6M bps | 1 | 100 | 5500 | 1.36 | 19.16 | 23.98 | -1.20 | 30.00 | Pass | 19 |
| 11a | 6M bps | 1 | 116 | 5580 | 1.36 | 19.24 | 23.98 | -1.20 | 30.00 | Pass | 19 |
| 11a | 6M bps | 1 | 140 | 5700 | 1.36 | 18.09 | 23.98 | -1.20 | 30.00 | Pass | 18 |
| HT20 | MCS 0 | 1 | 100 | 5500 | 1.47 | 18.08 | 23.98 | -1.20 | 30.00 | Pass | 18 |
| HT20 | MCS 0 | 1 | 116 | 5580 | 1.47 | 18.12 | 23.98 | -1.20 | 30.00 | Pass | 18 |
| HT20 | MCS 0 | 1 | 140 | 5700 | 1.47 | 17.72 | 23.98 | -1.20 | 30.00 | Pass | 17.75 |
| HT40 | MCS 0 | 1 | 102 | 5510 | 2.59 | 15.97 | 23.98 | -1.20 | 30.00 | Pass | 15.75 |
| HT40 | MCS 0 | 1 | 110 | 5550 | 2.59 | 18.21 | 23.98 | -1.20 | 30.00 | Pass | 18 |
| HT40 | MCS 0 | 1 | 134 | 5670 | 2.59 | 18.00 | 23.98 | -1.20 | 30.00 | Pass | 18 |

TEST RESULTS DATA
Power Spectral Density

| <5500 MHz ~ 5700 MHz > | | | | | | | | | | |
|------------------------|-----------|-----|-----|-------------|------------------|---------------------------------|-----------------------------|----------|--|-----------|
| Mod. | Data Rate | NTX | CH. | Freq. (MHz) | Duty Factor (dB) | Average Power Density (dBm/MHz) | Average PSD Limit (dBm/MHz) | DG (dBi) | | Pass/Fail |
| 11a | 6M bps | 1 | 100 | 5500 | 1.36 | 8.61 | 11.00 | -1.20 | | Pass |
| 11a | 6M bps | 1 | 116 | 5580 | 1.36 | 8.92 | 11.00 | -1.20 | | Pass |
| 11a | 6M bps | 1 | 140 | 5700 | 1.36 | 8.81 | 11.00 | -1.20 | | Pass |
| HT20 | MCS 0 | 1 | 100 | 5500 | 1.47 | 7.15 | 11.00 | -1.20 | | Pass |
| HT20 | MCS 0 | 1 | 116 | 5580 | 1.47 | 7.59 | 11.00 | -1.20 | | Pass |
| HT20 | MCS 0 | 1 | 140 | 5700 | 1.47 | 7.46 | 11.00 | -1.20 | | Pass |
| HT40 | MCS 0 | 1 | 102 | 5510 | 2.59 | 4.26 | 11.00 | -1.20 | | Pass |
| HT40 | MCS 0 | 1 | 110 | 5550 | 2.59 | 5.38 | 11.00 | -1.20 | | Pass |
| HT40 | MCS 0 | 1 | 134 | 5670 | 2.59 | 4.90 | 11.00 | -1.20 | | Pass |

TEST RESULTS DATA
6dB and 26dB EBW and 99% OBW

| <5745 MHz ~ 5825 MHz> | | | | | | | | | |
|-----------------------|-----------|-----|-----|-------------|---------------------|-----------------------|----------------------|--------------------------------|-----------|
| Mod. | Data Rate | NTX | CH. | Freq. (MHz) | 99% Bandwidth (MHz) | 26 dB Bandwidth (MHz) | 6 dB Bandwidth (MHz) | 6dB Bandwidth min. Limit (MHz) | Pass/Fail |
| 11a | 6M bps | 1 | 149 | 5745 | 16.53 | 25.14 | 14.15 | 0.5 | Pass |
| 11a | 6Mbps | 1 | 157 | 5785 | 16.63 | 27.00 | 13.95 | 0.5 | Pass |
| 11a | 6Mbps | 1 | 165 | 5825 | 16.63 | 27.18 | 15.15 | 0.5 | Pass |
| HT20 | MCS 0 | 1 | 149 | 5745 | 17.58 | 21.42 | 15.10 | 0.5 | Pass |
| HT20 | MCS 0 | 1 | 157 | 5785 | 17.58 | 21.30 | 15.15 | 0.5 | Pass |
| HT20 | MCS 0 | 1 | 165 | 5825 | 17.63 | 21.30 | 15.20 | 0.5 | Pass |
| HT40 | MCS 0 | 1 | 151 | 5755 | 35.76 | 46.68 | 35.19 | 0.5 | Pass |
| HT40 | MCS 0 | 1 | 159 | 5795 | 35.76 | 46.68 | 32.76 | 0.5 | Pass |

TEST RESULTS DATA
Average Power Table

| <5745 MHz – 5825 MHz> | | | | | | | | | | | |
|-----------------------|-----------|-----------------|-----|-------------|------------------|-------------------------------|---------------------------------|----------|--|-----------|---------|
| Mod. | Data Rate | N _{TX} | CH. | Freq. (MHz) | Duty Factor (dB) | Average Conducted Power (dBm) | FCC Conducted Power Limit (dBm) | DG (dBi) | | Pass/Fail | Setting |
| 11a | 6M bps | 1 | 149 | 5745 | 1.36 | 18.78 | 30.00 | -1.50 | | Pass | 19 |
| 11a | 6Mbps | 1 | 157 | 5785 | 1.36 | 18.72 | 30.00 | -1.50 | | Pass | 19 |
| 11a | 6Mbps | 1 | 165 | 5825 | 1.36 | 18.45 | 30.00 | -1.50 | | Pass | 19 |
| HT20 | MCS 0 | 1 | 149 | 5745 | 1.47 | 17.59 | 30.00 | -1.50 | | Pass | 18 |
| HT20 | MCS 0 | 1 | 157 | 5785 | 1.47 | 17.53 | 30.00 | -1.50 | | Pass | 18 |
| HT20 | MCS 0 | 1 | 165 | 5825 | 1.47 | 17.33 | 30.00 | -1.50 | | Pass | 18 |
| HT40 | MCS 0 | 1 | 151 | 5755 | 2.59 | 17.66 | 30.00 | -1.50 | | Pass | 18 |
| HT40 | MCS 0 | 1 | 159 | 5795 | 2.59 | 17.61 | 30.00 | -1.50 | | Pass | 18 |


TEST RESULTS DATA
Power Spectral Density

| <5745 MHz ~ 5825 MHz> | | | | | | | | | | |
|-----------------------|-----------|-----------------|-----|-------------|------------------|---------------------------------|------------------------------------|--------------------------------|----------|-----------|
| Mod. | Data Rate | N _{TX} | CH. | Freq. (MHz) | Duty Factor (dB) | 10log (500kHz /RBW) Factor (dB) | Average Power Density (dBm/500kHz) | Average PSD Limit (dBm/500kHz) | DG (dBi) | Pass/Fail |
| 11a | 6M bps | 1 | 149 | 5745 | 1.36 | 2.22 | 6.03 | 30.00 | -1.50 | Pass |
| 11a | 6Mbps | 1 | 157 | 5785 | 1.36 | 2.22 | 6.09 | 30.00 | -1.50 | Pass |
| 11a | 6Mbps | 1 | 165 | 5825 | 1.36 | 2.22 | 6.00 | 30.00 | -1.50 | Pass |
| HT20 | MCS 0 | 1 | 149 | 5745 | 1.47 | 2.22 | 5.23 | 30.00 | -1.50 | Pass |
| HT20 | MCS 0 | 1 | 157 | 5785 | 1.47 | 2.22 | 4.56 | 30.00 | -1.50 | Pass |
| HT20 | MCS 0 | 1 | 165 | 5825 | 1.47 | 2.22 | 4.81 | 30.00 | -1.50 | Pass |
| HT40 | MCS 0 | 1 | 151 | 5755 | 2.59 | 2.22 | 2.13 | 30.00 | -1.50 | Pass |
| HT40 | MCS 0 | 1 | 159 | 5795 | 2.59 | 2.22 | 1.45 | 30.00 | -1.50 | Pass |



Appendix B. AC Conducted Emission Test Results

| | | | |
|-----------------|---------------------------------------------------------------------------------|---------------------|---------|
| Test Engineer : | Yuki Tang | Temperature : | 22~24°C |
| | | Relative Humidity : | 44~50% |
| Test Voltage : | 120Vac / 60Hz | Phase : | Line |
| Remark : | All emissions not reported here are more than 10 dB below the prescribed limit. | | |

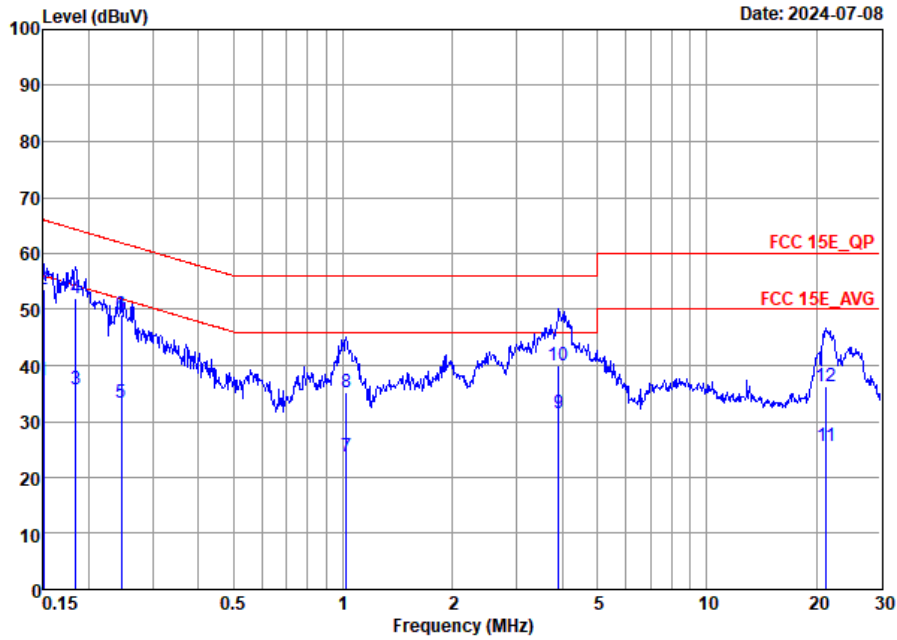


Site : CO01-SZ
 Condition: FCC 15E_QP AC LISN 100063_L LINE

| | Freq | Level | Over | Limit | Read | LISN | Cable | |
|-----|-------|-------|--------|-------|-------|--------|-------|---------|
| | MHz | dBuV | Limit | Line | Level | Factor | Loss | Remark |
| | | | dB | dBuV | dBuV | dB | dB | |
| 1 | 0.15 | 37.22 | -18.78 | 56.00 | 16.70 | 10.39 | 10.13 | Average |
| 2 * | 0.15 | 53.72 | -12.28 | 66.00 | 33.20 | 10.39 | 10.13 | QP |
| 3 | 0.18 | 35.81 | -18.47 | 54.28 | 15.30 | 10.36 | 10.15 | Average |
| 4 | 0.18 | 51.91 | -12.37 | 64.28 | 31.40 | 10.36 | 10.15 | QP |
| 5 | 0.25 | 33.41 | -18.50 | 51.91 | 13.10 | 10.16 | 10.15 | Average |
| 6 | 0.25 | 49.11 | -12.80 | 61.91 | 28.80 | 10.16 | 10.15 | QP |
| 7 | 1.02 | 23.80 | -22.20 | 46.00 | 3.40 | 10.24 | 10.16 | Average |
| 8 | 1.02 | 35.20 | -20.80 | 56.00 | 14.80 | 10.24 | 10.16 | QP |
| 9 | 3.92 | 31.52 | -14.48 | 46.00 | 11.00 | 10.20 | 10.32 | Average |
| 10 | 3.92 | 40.02 | -15.98 | 56.00 | 19.50 | 10.20 | 10.32 | QP |
| 11 | 21.26 | 25.66 | -24.34 | 50.00 | 4.90 | 10.14 | 10.62 | Average |
| 12 | 21.26 | 36.26 | -23.74 | 60.00 | 15.50 | 10.14 | 10.62 | QP |



| | | | |
|-----------------|---------------------------------------------------------------------------------|---------------------|---------|
| Test Engineer : | Yuki Tang | Temperature : | 22~24°C |
| | | Relative Humidity : | 44~50% |
| Test Voltage : | 120Vac / 60Hz | Phase : | Neutral |
| Remark : | All emissions not reported here are more than 10 dB below the prescribed limit. | | |

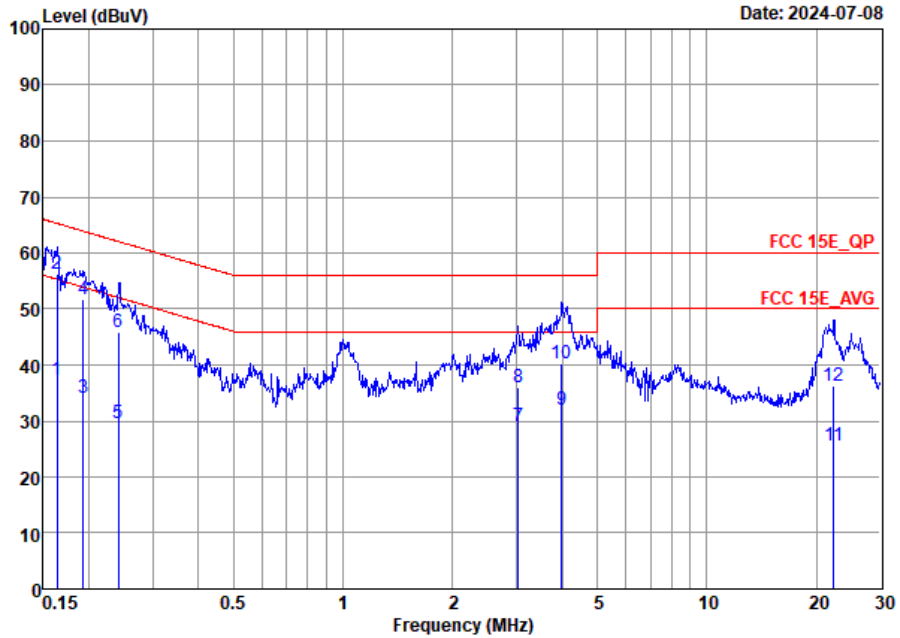

Site : CO01-SZ
 Condition: FCC 15E_QP AC LISN 100063_N NEUTRAL

| | Freq | Level | Over | Limit | Read | LISN | Cable | |
|-----|-------|-------|--------|-------|-------|--------|-------|---------|
| | MHz | dBuV | Limit | Line | Level | Factor | Loss | Remark |
| | | | dB | dBuV | dBuV | dB | dB | |
| 1 | 0.16 | 37.32 | -17.98 | 55.30 | 16.80 | 10.38 | 10.14 | Average |
| 2 * | 0.16 | 56.32 | -8.98 | 65.30 | 35.80 | 10.38 | 10.14 | QP |
| 3 | 0.19 | 34.27 | -19.62 | 53.89 | 13.80 | 10.32 | 10.15 | Average |
| 4 | 0.19 | 51.87 | -12.02 | 63.89 | 31.40 | 10.32 | 10.15 | QP |
| 5 | 0.24 | 29.72 | -22.32 | 52.04 | 9.40 | 10.17 | 10.15 | Average |
| 6 | 0.24 | 45.92 | -16.12 | 62.04 | 25.60 | 10.17 | 10.15 | QP |
| 7 | 3.03 | 29.06 | -16.94 | 46.00 | 8.30 | 10.48 | 10.28 | Average |
| 8 | 3.03 | 35.96 | -20.04 | 56.00 | 15.20 | 10.48 | 10.28 | QP |
| 9 | 3.99 | 32.00 | -14.00 | 46.00 | 11.20 | 10.48 | 10.32 | Average |
| 10 | 3.99 | 40.30 | -15.70 | 56.00 | 19.50 | 10.48 | 10.32 | QP |
| 11 | 22.30 | 25.68 | -24.32 | 50.00 | 4.91 | 10.12 | 10.65 | Average |
| 12 | 22.30 | 36.38 | -23.62 | 60.00 | 15.61 | 10.12 | 10.65 | QP |

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission Test Data

| | | | |
|-----------------|---------------|---------------------|---------|
| Test Engineer : | Zhaohui Liang | Relative Humidity : | 48~49% |
| | | Temperature : | 24-25°C |

Radiated Spurious Emission Test Modes

| Mode | Band | Band (GHz) | Antenna | Modulation | Channel | Frequency | Data Rate | Remark |
|---------|----------|------------|---------|--------------|---------|-----------|-----------|--------|
| Mode 1 | U-NII-1 | 5.15-5.25 | 1 | 802.11a | 36 | 5180 | 6Mbps | - |
| Mode 2 | U-NII-1 | 5.15-5.25 | 1 | 802.11a | 44 | 5220 | 6Mbps | - |
| Mode 3 | U-NII-1 | 5.15-5.25 | 1 | 802.11a | 48 | 5240 | 6Mbps | - |
| Mode 4 | U-NII-1 | 5.15-5.25 | 1 | 802.11n HT20 | 36 | 5180 | MCS0 | - |
| Mode 5 | U-NII-1 | 5.15-5.25 | 1 | 802.11n HT20 | 44 | 5220 | MCS0 | - |
| Mode 6 | U-NII-1 | 5.15-5.25 | 1 | 802.11n HT20 | 48 | 5240 | MCS0 | - |
| Mode 7 | U-NII-1 | 5.15-5.25 | 1 | 802.11n HT40 | 38 | 5190 | MCS0 | - |
| Mode 8 | U-NII-1 | 5.15-5.25 | 1 | 802.11n HT40 | 46 | 5230 | MCS0 | - |
| Mode 9 | U-NII-2A | 5.25-5.35 | 1 | 802.11a | 52 | 5260 | 6Mbps | - |
| Mode 10 | U-NII-2A | 5.25-5.35 | 1 | 802.11a | 60 | 5300 | 6Mbps | - |
| Mode 11 | U-NII-2A | 5.25-5.35 | 1 | 802.11a | 64 | 5320 | 6Mbps | - |
| Mode 12 | U-NII-2A | 5.25-5.35 | 1 | 802.11n HT20 | 52 | 5260 | MCS0 | - |
| Mode 13 | U-NII-2A | 5.25-5.35 | 1 | 802.11n HT20 | 60 | 5300 | MCS0 | - |
| Mode 14 | U-NII-2A | 5.25-5.35 | 1 | 802.11n HT20 | 64 | 5320 | MCS0 | - |
| Mode 15 | U-NII-2A | 5.25-5.35 | 1 | 802.11n HT40 | 54 | 5270 | MCS0 | - |
| Mode 16 | U-NII-2A | 5.25-5.35 | 1 | 802.11n HT40 | 62 | 5310 | MCS0 | - |
| Mode 17 | U-NII-2C | 5.47-5.725 | 1 | 802.11a | 100 | 5500 | 6Mbps | - |
| Mode 18 | U-NII-2C | 5.47-5.725 | 1 | 802.11a | 116 | 5580 | 6Mbps | - |
| Mode 19 | U-NII-2C | 5.47-5.725 | 1 | 802.11a | 140 | 5700 | 6Mbps | - |
| Mode 20 | U-NII-2C | 5.47-5.725 | 1 | 802.11n HT20 | 100 | 5500 | MCS0 | - |
| Mode 21 | U-NII-2C | 5.47-5.725 | 1 | 802.11n HT20 | 116 | 5580 | MCS0 | - |
| Mode 22 | U-NII-2C | 5.47-5.725 | 1 | 802.11n HT20 | 140 | 5700 | MCS0 | - |
| Mode 23 | U-NII-2C | 5.47-5.725 | 1 | 802.11n HT40 | 102 | 5510 | MCS0 | - |
| Mode 24 | U-NII-2C | 5.47-5.725 | 1 | 802.11n HT40 | 110 | 5550 | MCS0 | - |
| Mode 25 | U-NII-2C | 5.47-5.725 | 1 | 802.11n HT40 | 134 | 5670 | MCS0 | - |
| Mode 26 | U-NII-3 | 5.725-5.85 | 1 | 802.11a | 149 | 5745 | 6Mbps | - |
| Mode 27 | U-NII-3 | 5.725-5.85 | 1 | 802.11a | 157 | 5785 | 6Mbps | - |
| Mode 28 | U-NII-3 | 5.725-5.85 | 1 | 802.11a | 165 | 5825 | 6Mbps | - |
| Mode 29 | U-NII-3 | 5.725-5.85 | 1 | 802.11n HT20 | 149 | 5745 | MCS0 | - |
| Mode 30 | U-NII-3 | 5.725-5.85 | 1 | 802.11n HT20 | 157 | 5785 | MCS0 | - |
| Mode 31 | U-NII-3 | 5.725-5.85 | 1 | 802.11n HT20 | 165 | 5825 | MCS0 | - |
| Mode 32 | U-NII-3 | 5.725-5.85 | 1 | 802.11n HT40 | 151 | 5755 | MCS0 | - |
| Mode 33 | U-NII-3 | 5.725-5.85 | 1 | 802.11n HT40 | 159 | 5795 | MCS0 | - |
| Mode 34 | U-NII-1 | 5.15-5.25 | 1 | 802.11n HT40 | 38 | 5190 | MCS0 | LF |
| Mode 35 | U-NII-3 | 5.725-5.85 | 1 | 802.11a | 149 | 5745 | 6Mbps | LF |



Summary of each worse mode

| Mode | Modulation | Ch. | Freq. (MHz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Pol. | Peak Avg. | Result | Remark |
|------|--------------|-----|-------------|----------------|----------------|-------------|------|-----------|--------|-----------|
| 1 | 802.11a | 36 | 5149.85 | 50.42 | 54.00 | -3.58 | H | AVERAGE | Pass | Band Edge |
| 1 | 802.11a | 36 | 10360.00 | 49.25 | 68.30 | -19.05 | H | Peak | Pass | Harmonic |
| 2 | 802.11a | 44 | - | - | - | - | - | - | - | Band Edge |
| 2 | 802.11a | 44 | 10440.00 | 49.83 | 68.30 | -18.47 | H | Peak | Pass | Harmonic |
| 3 | 802.11a | 48 | - | - | - | - | - | - | - | Band Edge |
| 3 | 802.11a | 48 | 10480.00 | 49.27 | 68.30 | -19.03 | V | Peak | Pass | Harmonic |
| 4 | 802.11n HT20 | 36 | 5149.89 | 50.37 | 54.00 | -3.63 | H | AVERAGE | Pass | Band Edge |
| 4 | 802.11n HT20 | 36 | 10360.00 | 48.55 | 68.30 | -19.75 | H | Peak | Pass | Harmonic |
| 5 | 802.11n HT20 | 44 | - | - | - | - | - | - | - | Band Edge |
| 5 | 802.11n HT20 | 44 | 10440.00 | 48.97 | 68.30 | -19.33 | V | Peak | Pass | Harmonic |
| 6 | 802.11n HT20 | 48 | - | - | - | - | - | - | - | Band Edge |
| 6 | 802.11n HT20 | 48 | 10480.00 | 49.10 | 68.30 | -19.20 | V | Peak | Pass | Harmonic |
| 7 | 802.11n HT40 | 38 | 5149.99 | 50.92 | 54.00 | -3.08 | H | AVERAGE | Pass | Band Edge |
| 7 | 802.11n HT40 | 38 | 10380.00 | 48.99 | 68.30 | -19.31 | H | Peak | Pass | Harmonic |
| 8 | 802.11n HT40 | 46 | 5069.81 | 43.82 | 54.00 | -10.18 | V | AVERAGE | Pass | Band Edge |
| 8 | 802.11n HT40 | 46 | - | - | - | - | - | - | - | Harmonic |
| 9 | 802.11a | 52 | - | - | - | - | - | - | - | Band Edge |
| 9 | 802.11a | 52 | 10520.00 | 49.29 | 68.30 | -19.01 | H | Peak | Pass | Harmonic |
| 10 | 802.11a | 60 | - | - | - | - | - | - | - | Band Edge |
| 10 | 802.11a | 60 | 10600.00 | 48.56 | 74.00 | -25.44 | H | Peak | Pass | Harmonic |
| 11 | 802.11a | 64 | 5350.00 | 49.16 | 54.00 | -4.84 | H | AVERAGE | Pass | Band Edge |
| 11 | 802.11a | 64 | 10640.00 | 48.76 | 74.00 | -25.24 | V | Peak | Pass | Harmonic |
| 12 | 802.11n HT20 | 52 | - | - | - | - | - | - | - | Band Edge |
| 12 | 802.11n HT20 | 52 | 10520.00 | 48.76 | 68.30 | -19.54 | V | Peak | Pass | Harmonic |
| 13 | 802.11n HT20 | 60 | - | - | - | - | - | - | - | Band Edge |
| 13 | 802.11n HT20 | 60 | 10600.00 | 48.61 | 74.00 | -25.39 | H | Peak | Pass | Harmonic |
| 14 | 802.11n HT20 | 64 | 5350.00 | 47.63 | 54.00 | -6.37 | H | AVERAGE | Pass | Band Edge |
| 14 | 802.11n HT20 | 64 | 15960.00 | 49.21 | 74.00 | -24.79 | H | Peak | Pass | Harmonic |
| 15 | 802.11n HT40 | 54 | 5094.93 | 43.85 | 54.00 | -10.15 | H | AVERAGE | Pass | Band Edge |
| 15 | 802.11n HT40 | 54 | - | - | - | - | - | - | - | Harmonic |
| 16 | 802.11n HT40 | 62 | 5350.43 | 50.50 | 54.00 | -3.50 | H | AVERAGE | Pass | Band Edge |
| 16 | 802.11n HT40 | 62 | - | - | - | - | - | - | - | Harmonic |
| 17 | 802.11a | 100 | 5469.04 | 64.92 | 68.30 | -3.38 | H | PEAK | Pass | Band Edge |
| 17 | 802.11a | 100 | 16500.00 | 49.18 | 68.30 | -19.12 | H | Peak | Pass | Harmonic |
| 18 | 802.11a | 116 | - | - | - | - | - | - | - | Band Edge |
| 18 | 802.11a | 116 | 16740.00 | 48.55 | 68.30 | -19.75 | H | Peak | Pass | Harmonic |
| 19 | 802.11a | 140 | 5725.12 | 63.93 | 68.30 | -4.37 | H | PEAK | Pass | Band Edge |
| 19 | 802.11a | 140 | 17100.00 | 49.22 | 68.30 | -19.08 | H | Peak | Pass | Harmonic |
| 20 | 802.11n HT20 | 100 | 5469.34 | 61.91 | 68.30 | -6.39 | H | PEAK | Pass | Band Edge |
| 20 | 802.11n HT20 | 100 | 16500.00 | 49.10 | 68.30 | -19.20 | H | Peak | Pass | Harmonic |
| 21 | 802.11n HT20 | 116 | - | - | - | - | - | - | - | Band Edge |
| 21 | 802.11n HT20 | 116 | 16740.00 | 48.92 | 68.30 | -19.38 | H | Peak | Pass | Harmonic |
| 22 | 802.11n HT20 | 140 | 5729.81 | 62.96 | 68.30 | -5.34 | H | PEAK | Pass | Band Edge |
| 22 | 802.11n HT20 | 140 | 17100.00 | 48.87 | 68.30 | -19.43 | H | Peak | Pass | Harmonic |



| | | | | | | | | | | |
|----|--------------|-----|----------|-------|-------|--------|---|------|------|-----------|
| 23 | 802.11n HT40 | 102 | 5469.30 | 64.18 | 68.30 | -4.12 | H | PEAK | Pass | Band Edge |
| 23 | 802.11n HT40 | 102 | - | - | - | - | - | - | - | Harmonic |
| 24 | 802.11n HT40 | 110 | - | - | - | - | - | - | - | Band Edge |
| 24 | 802.11n HT40 | 110 | 16650.00 | 47.19 | 68.30 | -21.11 | V | Peak | Pass | Harmonic |
| 25 | 802.11n HT40 | 134 | 5726.57 | 59.09 | 68.30 | -9.21 | H | PEAK | Pass | Band Edge |
| 25 | 802.11n HT40 | 134 | - | - | - | - | - | - | - | Harmonic |
| 26 | 802.11a | 149 | 5639.01 | 54.29 | 68.30 | -14.01 | V | PEAK | Pass | Band Edge |
| 26 | 802.11a | 149 | 17235.00 | 49.01 | 68.30 | -19.29 | H | Peak | Pass | Harmonic |
| 27 | 802.11a | 157 | - | - | - | - | - | - | - | Band Edge |
| 27 | 802.11a | 157 | 17355.00 | 48.46 | 68.30 | -19.84 | H | Peak | Pass | Harmonic |
| 28 | 802.11a | 165 | 5948.08 | 53.75 | 68.30 | -14.55 | V | PEAK | Pass | Band Edge |
| 28 | 802.11a | 165 | 17475.00 | 48.72 | 68.30 | -19.58 | H | Peak | Pass | Harmonic |
| 29 | 802.11n HT20 | 149 | 5613.41 | 53.66 | 68.30 | -14.64 | V | PEAK | Pass | Band Edge |
| 29 | 802.11n HT20 | 149 | 17235.00 | 48.18 | 68.30 | -20.12 | V | Peak | Pass | Harmonic |
| 30 | 802.11n HT20 | 157 | - | - | - | - | - | - | - | Band Edge |
| 30 | 802.11n HT20 | 157 | 17355.00 | 48.34 | 68.30 | -19.96 | V | Peak | Pass | Harmonic |
| 31 | 802.11n HT20 | 165 | 5931.19 | 53.31 | 68.30 | -14.99 | V | PEAK | Pass | Band Edge |
| 31 | 802.11n HT20 | 165 | 17475.00 | 48.83 | 68.30 | -19.47 | H | Peak | Pass | Harmonic |
| 32 | 802.11n HT40 | 151 | 5628.61 | 53.29 | 68.30 | -15.01 | H | PEAK | Pass | Band Edge |
| 32 | 802.11n HT40 | 151 | - | - | - | - | - | - | - | Harmonic |
| 33 | 802.11n HT40 | 159 | 5612.58 | 53.34 | 68.30 | -14.96 | H | PEAK | Pass | Band Edge |
| 33 | 802.11n HT40 | 159 | - | - | - | - | - | - | - | Harmonic |
| 34 | 802.11n HT40 | 38 | 944.71 | 31.06 | 46.00 | -14.94 | V | Peak | Pass | LF |
| 35 | 802.11a | 149 | 837.04 | 31.33 | 46.00 | -14.67 | H | Peak | Pass | LF |



| Mode | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|--------|--------|--------|-------------|--------|--------|--------|------------|------|-------|------|------|-------|--------|-------------|--|--|-----|--------|--------|----|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|--------|------|-----|-------|--------|------|------|--------|------|-------|------|------|-------|--------|-------------|--|--|-----|--------|--------|----|------|----|----|----|-----|---|---------|--------|-------|-------|-------|-------|-------|-------|-----|------------|
| | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-1_5.15-5.25_802.11a_CH36_5180MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5148.77</td> <td>63.35</td> <td>74.00</td> <td>-10.65</td> <td>49.17</td> <td>34.87</td> <td>11.09</td> <td>31.78</td> <td>361</td> <td>70 PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dB/m | dB | dB | cm | deg | 1 | 5148.77 | 63.35 | 74.00 | -10.65 | 49.17 | 34.87 | 11.09 | 31.78 | 361 | 70 PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>108.56</td> <td>-----</td> <td>-----</td> <td>94.45</td> <td>34.86</td> <td>11.07</td> <td>31.82</td> <td>361</td> <td>70 PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dB/m | dB | dB | cm | deg | 1 | 5180.00 | 108.56 | ----- | ----- | 94.45 | 34.86 | 11.07 | 31.82 | 361 | 70 PEAK |
| | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5148.77 | 63.35 | 74.00 | -10.65 | 49.17 | 34.87 | 11.09 | 31.78 | 361 | 70 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5180.00 | 108.56 | ----- | ----- | 94.45 | 34.86 | 11.07 | 31.82 | 361 | 70 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.85</td> <td>50.42</td> <td>54.00</td> <td>-3.58</td> <td>36.24</td> <td>34.87</td> <td>11.09</td> <td>31.78</td> <td>361</td> <td>70 AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dB/m | dB | dB | cm | deg | 1 | 5149.85 | 50.42 | 54.00 | -3.58 | 36.24 | 34.87 | 11.09 | 31.78 | 361 | 70 AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>102.20</td> <td>-----</td> <td>-----</td> <td>88.09</td> <td>34.86</td> <td>11.07</td> <td>31.82</td> <td>361</td> <td>70 AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dB/m | dB | dB | cm | deg | 1 | 5180.00 | 102.20 | ----- | ----- | 88.09 | 34.86 | 11.07 | 31.82 | 361 | 70 AVERAGE |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5149.85 | 50.42 | 54.00 | -3.58 | 36.24 | 34.87 | 11.09 | 31.78 | 361 | 70 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5180.00 | 102.20 | ----- | ----- | 88.09 | 34.86 | 11.07 | 31.82 | 361 | 70 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|--------|--------|--------|--------|--------|--------|--------|--------|---------|-------|------|------|-------|--------|------|--------|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|-----|---------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|--------|------|-----|-------|--------|------|------|--------|------|-------|------|------|-------|--------|------|--------|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|--------|-------|-------|-------|-------|-------|-------|-----|-----|---------|
| | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-1_5.15-5.25_802.11a_CH36_5180MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.99</td> <td>59.29</td> <td>74.00</td> <td>-14.71</td> <td>45.12</td> <td>34.87</td> <td>11.08</td> <td>31.78</td> <td>398</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5149.99 | 59.29 | 74.00 | -14.71 | 45.12 | 34.87 | 11.08 | 31.78 | 398 | 360 | PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>104.70</td> <td>-----</td> <td>-----</td> <td>90.59</td> <td>34.86</td> <td>11.07</td> <td>31.82</td> <td>398</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5180.00 | 104.70 | ----- | ----- | 90.59 | 34.86 | 11.07 | 31.82 | 398 | 360 | PEAK |
| | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5149.99 | 59.29 | 74.00 | -14.71 | 45.12 | 34.87 | 11.08 | 31.78 | 398 | 360 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5180.00 | 104.70 | ----- | ----- | 90.59 | 34.86 | 11.07 | 31.82 | 398 | 360 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.99</td> <td>46.92</td> <td>54.00</td> <td>-7.08</td> <td>32.75</td> <td>34.87</td> <td>11.08</td> <td>31.78</td> <td>398</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5149.99 | 46.92 | 54.00 | -7.08 | 32.75 | 34.87 | 11.08 | 31.78 | 398 | 360 | AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>98.32</td> <td>-----</td> <td>-----</td> <td>84.21</td> <td>34.86</td> <td>11.07</td> <td>31.82</td> <td>398</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5180.00 | 98.32 | ----- | ----- | 84.21 | 34.86 | 11.07 | 31.82 | 398 | 360 | AVERAGE |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5149.99 | 46.92 | 54.00 | -7.08 | 32.75 | 34.87 | 11.08 | 31.78 | 398 | 360 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5180.00 | 98.32 | ----- | ----- | 84.21 | 34.86 | 11.07 | 31.82 | 398 | 360 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------|-------|--------|-------------|--------|--------|-------|--------|------|-------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|------|-----|-------|--------|------|------|--------|------|-------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-1_5.15-5.25_802.11a_CH36_5180MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | <p style="text-align: right;">Date: 2024-06-26</p> | <p style="text-align: right;">Date: 2024-06-26</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10360.00</td> <td>49.25</td> <td>68.30</td> <td>-19.05</td> <td>46.43</td> <td>39.44</td> <td>14.15</td> <td>50.77</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15540.00</td> <td>48.20</td> <td>74.00</td> <td>-25.80</td> <td>40.96</td> <td>41.82</td> <td>16.85</td> <td>51.43</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 10360.00 | 49.25 | 68.30 | -19.05 | 46.43 | 39.44 | 14.15 | 50.77 | -- | -- | Peak | 2 | 15540.00 | 48.20 | 74.00 | -25.80 | 40.96 | 41.82 | 16.85 | 51.43 | -- | -- | Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10360.00</td> <td>49.18</td> <td>68.30</td> <td>-19.12</td> <td>46.36</td> <td>39.44</td> <td>14.15</td> <td>50.77</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15540.00</td> <td>47.70</td> <td>74.00</td> <td>-26.30</td> <td>40.46</td> <td>41.82</td> <td>16.85</td> <td>51.43</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 10360.00 | 49.18 | 68.30 | -19.12 | 46.36 | 39.44 | 14.15 | 50.77 | -- | -- | Peak | 2 | 15540.00 | 47.70 | 74.00 | -26.30 | 40.46 | 41.82 | 16.85 | 51.43 | -- | -- |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 10360.00 | 49.25 | 68.30 | -19.05 | 46.43 | 39.44 | 14.15 | 50.77 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 15540.00 | 48.20 | 74.00 | -25.80 | 40.96 | 41.82 | 16.85 | 51.43 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 10360.00 | 49.18 | 68.30 | -19.12 | 46.36 | 39.44 | 14.15 | 50.77 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 15540.00 | 47.70 | 74.00 | -26.30 | 40.46 | 41.82 | 16.85 | 51.43 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|--------|--------|--------|--------|--------|-------|--------|------|-------|------|--------|-------|--------|------|--------|-----|--------|--------|----|------|------|----|----|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|------|-----|-------|--------|------|------|--------|------|-------|------|--------|-------|--------|------|--------|-----|--------|--------|----|------|------|----|----|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-1_5.15-5.25_802.11a_CH44_5220MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | <p>Date: 2024-06-26</p> | <p>Date: 2024-06-26</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10440.00</td> <td>49.83</td> <td>68.30</td> <td>-18.47</td> <td>46.94</td> <td>39.48</td> <td>14.20</td> <td>50.79</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15660.00</td> <td>47.61</td> <td>74.00</td> <td>-26.39</td> <td>40.30</td> <td>41.90</td> <td>16.94</td> <td>51.53</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 10440.00 | 49.83 | 68.30 | -18.47 | 46.94 | 39.48 | 14.20 | 50.79 | -- | -- | Peak | 2 | 15660.00 | 47.61 | 74.00 | -26.39 | 40.30 | 41.90 | 16.94 | 51.53 | -- | -- | Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10440.00</td> <td>49.12</td> <td>68.30</td> <td>-19.18</td> <td>46.23</td> <td>39.48</td> <td>14.20</td> <td>50.79</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15660.00</td> <td>46.91</td> <td>74.00</td> <td>-27.09</td> <td>39.60</td> <td>41.90</td> <td>16.94</td> <td>51.53</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 10440.00 | 49.12 | 68.30 | -19.18 | 46.23 | 39.48 | 14.20 | 50.79 | -- | -- | Peak | 2 | 15660.00 | 46.91 | 74.00 | -27.09 | 39.60 | 41.90 | 16.94 | 51.53 | -- | -- |
| Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 10440.00 | 49.83 | 68.30 | -18.47 | 46.94 | 39.48 | 14.20 | 50.79 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 15660.00 | 47.61 | 74.00 | -26.39 | 40.30 | 41.90 | 16.94 | 51.53 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 10440.00 | 49.12 | 68.30 | -19.18 | 46.23 | 39.48 | 14.20 | 50.79 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 15660.00 | 46.91 | 74.00 | -27.09 | 39.60 | 41.90 | 16.94 | 51.53 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|--------|--------|-------------|--------|--------|------------|--------|--|------|-------|-------------|-------|--------|-------------|--|----|-----|------------|-------|-------|--------|-------|-------|-------|-------|------------|------------|-------|-------|--------|-------|-------|-------|-------|------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|------|-----|-------|--------|------|------|--------|--|------|-------|-------------|-------|--------|-------------|--|----|-----|------------|-------|-------|--------|-------|-------|-------|-------|------------|------------|-------|-------|--------|-------|-------|-------|-------|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-1_5.15-5.25_802.11a_CH48_5240MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | <p>Date: 2024-06-26</p> | <p>Date: 2024-06-26</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10480.00</td> <td>48.99</td> <td>68.30</td> <td>-19.31</td> <td>46.07</td> <td>39.49</td> <td>14.23</td> <td>50.80</td> <td>-- -- Peak</td> </tr> <tr> <td>2 15720.00</td> <td>47.30</td> <td>74.00</td> <td>-26.70</td> <td>39.96</td> <td>41.93</td> <td>16.99</td> <td>51.58</td> <td>-- -- Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | | Freq | Level | Line Margin | Level | Factor | Loss Factor | | cm | deg | 1 10480.00 | 48.99 | 68.30 | -19.31 | 46.07 | 39.49 | 14.23 | 50.80 | -- -- Peak | 2 15720.00 | 47.30 | 74.00 | -26.70 | 39.96 | 41.93 | 16.99 | 51.58 | -- -- Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10480.00</td> <td>49.27</td> <td>68.30</td> <td>-19.03</td> <td>46.35</td> <td>39.49</td> <td>14.23</td> <td>50.80</td> <td>-- -- Peak</td> </tr> <tr> <td>2 15720.00</td> <td>47.84</td> <td>74.00</td> <td>-26.16</td> <td>40.50</td> <td>41.93</td> <td>16.99</td> <td>51.58</td> <td>-- -- Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | | Freq | Level | Line Margin | Level | Factor | Loss Factor | | cm | deg | 1 10480.00 | 49.27 | 68.30 | -19.03 | 46.35 | 39.49 | 14.23 | 50.80 | -- -- Peak | 2 15720.00 | 47.84 | 74.00 | -26.16 | 40.50 | 41.93 | 16.99 | 51.58 |
| Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 10480.00 | 48.99 | 68.30 | -19.31 | 46.07 | 39.49 | 14.23 | 50.80 | -- -- Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 15720.00 | 47.30 | 74.00 | -26.70 | 39.96 | 41.93 | 16.99 | 51.58 | -- -- Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 10480.00 | 49.27 | 68.30 | -19.03 | 46.35 | 39.49 | 14.23 | 50.80 | -- -- Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 15720.00 | 47.84 | 74.00 | -26.16 | 40.50 | 41.93 | 16.99 | 51.58 | -- -- Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 4 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|--------|-------|--------|--------|--------|--------|------|------|---------|------|------|-------|--------|------|--------|--------|-----|--------|--------|------|------|----|----|----|-----|---|---------|-------|-------|-------|-------|-------|-------|-------|-----|----|---------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|--------|------|-----|-------|--------|------|------|------|-------|------|------|-------|--------|------|--------|--------|-----|--------|--------|------|------|----|----|----|-----|---|---------|--------|-------|-------|-------|-------|-------|-------|-----|----|---------|
| | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-1_5.15-5.25_802.11n HT20_CH36_5180MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr> <tr> <th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr> </thead> <tbody> <tr> <td>1</td><td>5149.85</td><td>64.51</td><td>74.00</td><td>-9.49</td><td>50.33</td><td>34.87</td><td>11.09</td><td>31.78</td><td>364</td><td>69</td><td>PEAK</td></tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | Remark | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5149.85 | 64.51 | 74.00 | -9.49 | 50.33 | 34.87 | 11.09 | 31.78 | 364 | 69 | PEAK | <table border="1"> <thead> <tr> <th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr> <tr> <th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr> </thead> <tbody> <tr> <td>1</td><td>5180.00</td><td>108.23</td><td>-----</td><td>-----</td><td>94.10</td><td>34.87</td><td>11.07</td><td>31.81</td><td>364</td><td>69</td><td>PEAK</td></tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | Remark | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5180.00 | 108.23 | ----- | ----- | 94.10 | 34.87 | 11.07 | 31.81 | 364 | 69 | PEAK |
| | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5149.85 | 64.51 | 74.00 | -9.49 | 50.33 | 34.87 | 11.09 | 31.78 | 364 | 69 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5180.00 | 108.23 | ----- | ----- | 94.10 | 34.87 | 11.07 | 31.81 | 364 | 69 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr> <tr> <th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr> </thead> <tbody> <tr> <td>1</td><td>5149.89</td><td>50.37</td><td>54.00</td><td>-3.63</td><td>36.19</td><td>34.87</td><td>11.09</td><td>31.78</td><td>364</td><td>69</td><td>AVERAGE</td></tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | Remark | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5149.89 | 50.37 | 54.00 | -3.63 | 36.19 | 34.87 | 11.09 | 31.78 | 364 | 69 | AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr> <tr> <th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr> </thead> <tbody> <tr> <td>1</td><td>5180.00</td><td>101.26</td><td>-----</td><td>-----</td><td>87.15</td><td>34.86</td><td>11.07</td><td>31.82</td><td>364</td><td>69</td><td>AVERAGE</td></tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | Remark | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5180.00 | 101.26 | ----- | ----- | 87.15 | 34.86 | 11.07 | 31.82 | 364 | 69 | AVERAGE |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5149.89 | 50.37 | 54.00 | -3.63 | 36.19 | 34.87 | 11.09 | 31.78 | 364 | 69 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5180.00 | 101.26 | ----- | ----- | 87.15 | 34.86 | 11.07 | 31.82 | 364 | 69 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 4 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|--------|-------|--------|--------|--------|--------|--------|---------|------|-------|------|------|-------|--------|------|--------|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|--------|-------|-------|-------|-------|-------|-----|-----|---------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|--------|------|-----|-------|--------|------|------|--------|------|-------|------|------|-------|--------|------|--------|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|--------|-------|-------|-------|-------|-------|-----|-----|---------|
| | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-1_5.15-5.25_802.11n HT20_CH36_5180MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <p style="text-align: right;">Date: 2024-06-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>104.09</td> <td>-----</td> <td>89.98</td> <td>34.86</td> <td>11.07</td> <td>31.82</td> <td>398</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5180.00 | 104.09 | ----- | 89.98 | 34.86 | 11.07 | 31.82 | 398 | 360 | PEAK | <p style="text-align: right;">Date: 2024-06-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>104.09</td> <td>-----</td> <td>89.98</td> <td>34.86</td> <td>11.07</td> <td>31.82</td> <td>398</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5180.00 | 104.09 | ----- | 89.98 | 34.86 | 11.07 | 31.82 | 398 | 360 | PEAK |
| | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5180.00 | 104.09 | ----- | 89.98 | 34.86 | 11.07 | 31.82 | 398 | 360 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5180.00 | 104.09 | ----- | 89.98 | 34.86 | 11.07 | 31.82 | 398 | 360 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <p style="text-align: right;">Date: 2024-06-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>46.72</td> <td>-7.28</td> <td>32.54</td> <td>34.87</td> <td>11.09</td> <td>31.78</td> <td>398</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5180.00 | 46.72 | -7.28 | 32.54 | 34.87 | 11.09 | 31.78 | 398 | 360 | AVERAGE | <p style="text-align: right;">Date: 2024-06-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>46.72</td> <td>-7.28</td> <td>32.54</td> <td>34.87</td> <td>11.09</td> <td>31.78</td> <td>398</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5180.00 | 46.72 | -7.28 | 32.54 | 34.87 | 11.09 | 31.78 | 398 | 360 | AVERAGE |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5180.00 | 46.72 | -7.28 | 32.54 | 34.87 | 11.09 | 31.78 | 398 | 360 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5180.00 | 46.72 | -7.28 | 32.54 | 34.87 | 11.09 | 31.78 | 398 | 360 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 4 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|-------|--------|-------------|--------|--------|-------|--------|------|-------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|------|-----|-------|--------|------|------|--------|------|-------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-1_5.15-5.25_802.11n HT20_CH36_5180MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10360.00</td> <td>48.55</td> <td>68.30</td> <td>-19.75</td> <td>45.73</td> <td>39.44</td> <td>14.15</td> <td>50.77</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15540.00</td> <td>48.20</td> <td>74.00</td> <td>-25.80</td> <td>40.96</td> <td>41.82</td> <td>16.85</td> <td>51.43</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 10360.00 | 48.55 | 68.30 | -19.75 | 45.73 | 39.44 | 14.15 | 50.77 | -- | -- | Peak | 2 | 15540.00 | 48.20 | 74.00 | -25.80 | 40.96 | 41.82 | 16.85 | 51.43 | -- | -- | Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10360.00</td> <td>48.00</td> <td>68.30</td> <td>-20.30</td> <td>45.18</td> <td>39.44</td> <td>14.15</td> <td>50.77</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15540.00</td> <td>47.84</td> <td>74.00</td> <td>-26.16</td> <td>40.60</td> <td>41.82</td> <td>16.85</td> <td>51.43</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 10360.00 | 48.00 | 68.30 | -20.30 | 45.18 | 39.44 | 14.15 | 50.77 | -- | -- | Peak | 2 | 15540.00 | 47.84 | 74.00 | -26.16 | 40.60 | 41.82 | 16.85 | 51.43 | -- | -- |
| Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 10360.00 | 48.55 | 68.30 | -19.75 | 45.73 | 39.44 | 14.15 | 50.77 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 15540.00 | 48.20 | 74.00 | -25.80 | 40.96 | 41.82 | 16.85 | 51.43 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 10360.00 | 48.00 | 68.30 | -20.30 | 45.18 | 39.44 | 14.15 | 50.77 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 15540.00 | 47.84 | 74.00 | -26.16 | 40.60 | 41.82 | 16.85 | 51.43 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|-------|--------|-------------|--------|--------|--------|--------|------|-------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|-----|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|------|-----|-------|--------|------|------|--------|------|-------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|-----|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-1_5.15-5.25_802.11n HT20_CH44_5220MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10440.00</td> <td>47.46</td> <td>68.30</td> <td>-20.84</td> <td>44.57</td> <td>39.48</td> <td>14.20</td> <td>50.79</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15660.00</td> <td>48.05</td> <td>74.00</td> <td>-25.95</td> <td>40.74</td> <td>41.90</td> <td>16.94</td> <td>51.53</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | 1 | 10440.00 | 47.46 | 68.30 | -20.84 | 44.57 | 39.48 | 14.20 | 50.79 | -- | -- | Peak | 2 | 15660.00 | 48.05 | 74.00 | -25.95 | 40.74 | 41.90 | 16.94 | 51.53 | -- | -- | Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10440.00</td> <td>48.97</td> <td>68.30</td> <td>-19.33</td> <td>46.08</td> <td>39.48</td> <td>14.20</td> <td>50.79</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15660.00</td> <td>46.70</td> <td>74.00</td> <td>-27.30</td> <td>39.39</td> <td>41.90</td> <td>16.94</td> <td>51.53</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | 1 | 10440.00 | 48.97 | 68.30 | -19.33 | 46.08 | 39.48 | 14.20 | 50.79 | -- | -- | Peak | 2 | 15660.00 | 46.70 | 74.00 | -27.30 | 39.39 | 41.90 | 16.94 | 51.53 | -- | -- | Peak |
| | Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 10440.00 | 47.46 | 68.30 | -20.84 | 44.57 | 39.48 | 14.20 | 50.79 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 15660.00 | 48.05 | 74.00 | -25.95 | 40.74 | 41.90 | 16.94 | 51.53 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 10440.00 | 48.97 | 68.30 | -19.33 | 46.08 | 39.48 | 14.20 | 50.79 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 15660.00 | 46.70 | 74.00 | -27.30 | 39.39 | 41.90 | 16.94 | 51.53 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 6 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|-------|--------|-------------|--------|--------|--------|--------|------|-------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|------|-----|-------|--------|------|------|--------|------|-------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-1_5.15-5.25_802.11n HT20_CH48_5240MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10480.00</td> <td>48.43</td> <td>68.30</td> <td>-19.87</td> <td>45.51</td> <td>39.49</td> <td>14.23</td> <td>50.80</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15720.00</td> <td>47.53</td> <td>74.00</td> <td>-26.47</td> <td>40.19</td> <td>41.93</td> <td>16.99</td> <td>51.58</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 10480.00 | 48.43 | 68.30 | -19.87 | 45.51 | 39.49 | 14.23 | 50.80 | -- | -- | Peak | 2 | 15720.00 | 47.53 | 74.00 | -26.47 | 40.19 | 41.93 | 16.99 | 51.58 | -- | -- | Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10480.00</td> <td>49.10</td> <td>68.30</td> <td>-19.20</td> <td>46.18</td> <td>39.49</td> <td>14.23</td> <td>50.80</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15720.00</td> <td>47.04</td> <td>74.00</td> <td>-26.96</td> <td>39.70</td> <td>41.93</td> <td>16.99</td> <td>51.58</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 10480.00 | 49.10 | 68.30 | -19.20 | 46.18 | 39.49 | 14.23 | 50.80 | -- | -- | Peak | 2 | 15720.00 | 47.04 | 74.00 | -26.96 | 39.70 | 41.93 | 16.99 | 51.58 | -- | -- | Peak |
| | Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 10480.00 | 48.43 | 68.30 | -19.87 | 45.51 | 39.49 | 14.23 | 50.80 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 15720.00 | 47.53 | 74.00 | -26.47 | 40.19 | 41.93 | 16.99 | 51.58 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 10480.00 | 49.10 | 68.30 | -19.20 | 46.18 | 39.49 | 14.23 | 50.80 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 15720.00 | 47.04 | 74.00 | -26.96 | 39.70 | 41.93 | 16.99 | 51.58 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 7 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|--------|--------|--------|--------|--------|--------|--------|--------|---------|-------|------|------|-------|--------|------|--------|--|-----|--------|--------|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|----|---------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|--------|------|-----|-------|--------|------|------|--------|------|-------|------|------|-------|--------|------|--------|--|-----|--------|--------|------|------|----|----|----|-----|---|---------|--------|-------|-------|-------|-------|-------|-------|-----|----|---------|
| | Band Edge - L | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-1_5.15-5.25_802.11n HT40_CH38_5190MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <p style="text-align: right;">Date: 2024-06-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.63</td> <td>60.82</td> <td>74.00</td> <td>-13.18</td> <td>46.64</td> <td>34.87</td> <td>11.09</td> <td>31.78</td> <td>348</td> <td>90</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5149.63 | 60.82 | 74.00 | -13.18 | 46.64 | 34.87 | 11.09 | 31.78 | 348 | 90 | PEAK | <p style="text-align: right;">Date: 2024-06-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5190.00</td> <td>104.36</td> <td>-----</td> <td>-----</td> <td>90.27</td> <td>34.86</td> <td>11.06</td> <td>31.83</td> <td>348</td> <td>90</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5190.00 | 104.36 | ----- | ----- | 90.27 | 34.86 | 11.06 | 31.83 | 348 | 90 | PEAK |
| | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5149.63 | 60.82 | 74.00 | -13.18 | 46.64 | 34.87 | 11.09 | 31.78 | 348 | 90 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5190.00 | 104.36 | ----- | ----- | 90.27 | 34.86 | 11.06 | 31.83 | 348 | 90 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <p style="text-align: right;">Date: 2024-06-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.99</td> <td>50.92</td> <td>54.00</td> <td>-3.08</td> <td>36.75</td> <td>34.87</td> <td>11.08</td> <td>31.78</td> <td>348</td> <td>90</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5149.99 | 50.92 | 54.00 | -3.08 | 36.75 | 34.87 | 11.08 | 31.78 | 348 | 90 | AVERAGE | <p style="text-align: right;">Date: 2024-06-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5190.00</td> <td>98.26</td> <td>-----</td> <td>-----</td> <td>84.17</td> <td>34.86</td> <td>11.06</td> <td>31.83</td> <td>348</td> <td>90</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5190.00 | 98.26 | ----- | ----- | 84.17 | 34.86 | 11.06 | 31.83 | 348 | 90 | AVERAGE |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5149.99 | 50.92 | 54.00 | -3.08 | 36.75 | 34.87 | 11.08 | 31.78 | 348 | 90 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5190.00 | 98.26 | ----- | ----- | 84.17 | 34.86 | 11.06 | 31.83 | 348 | 90 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 7 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|--------|--------|--------|-------|--------|--------|------|--------|---------|-------|------|------|-------|--------|------|--------|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|----|---------|-------|
| | Band Edge - R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-1_5.15-5.25_802.11n HT40_CH38_5190MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <p>Date: 2024-06-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5424.77</td> <td>51.56</td> <td>74.00</td> <td>-22.44</td> <td>37.89</td> <td>34.82</td> <td>10.97</td> <td>32.12</td> <td>348</td> <td>90</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5424.77 | 51.56 | 74.00 | -22.44 | 37.89 | 34.82 | 10.97 | 32.12 | 348 | 90 | PEAK | Blank |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5424.77 | 51.56 | 74.00 | -22.44 | 37.89 | 34.82 | 10.97 | 32.12 | 348 | 90 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <p>Date: 2024-06-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5454.47</td> <td>42.85</td> <td>54.00</td> <td>-11.15</td> <td>29.10</td> <td>34.81</td> <td>11.10</td> <td>32.16</td> <td>348</td> <td>90</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5454.47 | 42.85 | 54.00 | -11.15 | 29.10 | 34.81 | 11.10 | 32.16 | 348 | 90 | AVERAGE | Blank |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5454.47 | 42.85 | 54.00 | -11.15 | 29.10 | 34.81 | 11.10 | 32.16 | 348 | 90 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 7 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|--------|--------|--------|--------|--------|--------|--------|--------|---------|-------|------|------|-------|--------|------|--------|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|-----|---------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|--------|------|-----|-------|--------|------|------|--------|------|-------|------|------|-------|--------|------|--------|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|-------|-------|-------|-------|-------|-----|-----|---------|
| | Band Edge - L | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-1_5.15-5.25_802.11n HT40_CH38_5190MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.63</td> <td>55.51</td> <td>74.00</td> <td>-18.49</td> <td>41.33</td> <td>34.87</td> <td>11.09</td> <td>31.78</td> <td>397</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5149.63 | 55.51 | 74.00 | -18.49 | 41.33 | 34.87 | 11.09 | 31.78 | 397 | 360 | PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5190.00</td> <td>98.65</td> <td>-----</td> <td>-----</td> <td>84.54</td> <td>34.86</td> <td>11.07</td> <td>31.82</td> <td>397</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5190.00 | 98.65 | ----- | ----- | 84.54 | 34.86 | 11.07 | 31.82 | 397 | 360 | PEAK |
| | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5149.63 | 55.51 | 74.00 | -18.49 | 41.33 | 34.87 | 11.09 | 31.78 | 397 | 360 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5190.00 | 98.65 | ----- | ----- | 84.54 | 34.86 | 11.07 | 31.82 | 397 | 360 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.83</td> <td>46.16</td> <td>54.00</td> <td>-7.84</td> <td>31.98</td> <td>34.87</td> <td>11.09</td> <td>31.78</td> <td>397</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5149.83 | 46.16 | 54.00 | -7.84 | 31.98 | 34.87 | 11.09 | 31.78 | 397 | 360 | AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5190.00</td> <td>92.29</td> <td>-----</td> <td>-----</td> <td>78.18</td> <td>34.86</td> <td>11.07</td> <td>31.82</td> <td>397</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5190.00 | 92.29 | ----- | ----- | 78.18 | 34.86 | 11.07 | 31.82 | 397 | 360 | AVERAGE |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5149.83 | 46.16 | 54.00 | -7.84 | 31.98 | 34.87 | 11.09 | 31.78 | 397 | 360 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5190.00 | 92.29 | ----- | ----- | 78.18 | 34.86 | 11.07 | 31.82 | 397 | 360 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 7 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|--------|--------|--------|-------|--------|--------|------|--------|---------|-------|------|------|-------|--------|------|--------|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|-----|---------|-------|
| | Band Edge - R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-1_5.15-5.25_802.11n HT40_CH38_5190MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <p>Date: 2024-06-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5453.14</td> <td>51.90</td> <td>74.00</td> <td>-22.10</td> <td>38.16</td> <td>34.81</td> <td>11.09</td> <td>32.16</td> <td>397</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5453.14 | 51.90 | 74.00 | -22.10 | 38.16 | 34.81 | 11.09 | 32.16 | 397 | 360 | PEAK | Blank |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5453.14 | 51.90 | 74.00 | -22.10 | 38.16 | 34.81 | 11.09 | 32.16 | 397 | 360 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <p>Date: 2024-06-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5376.19</td> <td>42.85</td> <td>54.00</td> <td>-11.15</td> <td>29.17</td> <td>34.82</td> <td>10.92</td> <td>32.06</td> <td>397</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5376.19 | 42.85 | 54.00 | -11.15 | 29.17 | 34.82 | 10.92 | 32.06 | 397 | 360 | AVERAGE | Blank |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5376.19 | 42.85 | 54.00 | -11.15 | 29.17 | 34.82 | 10.92 | 32.06 | 397 | 360 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 7 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|-------|--------|-------------|--------|--------|-------|--------|------|-------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|------|-----|-------|--------|------|------|--------|------|-------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-1_5.15-5.25_802.11n HT40_CH38_5190MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10380.00</td> <td>48.99</td> <td>68.30</td> <td>-19.31</td> <td>46.16</td> <td>39.45</td> <td>14.16</td> <td>50.78</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15570.00</td> <td>46.70</td> <td>74.00</td> <td>-27.30</td> <td>39.45</td> <td>41.84</td> <td>16.87</td> <td>51.46</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 10380.00 | 48.99 | 68.30 | -19.31 | 46.16 | 39.45 | 14.16 | 50.78 | -- | -- | Peak | 2 | 15570.00 | 46.70 | 74.00 | -27.30 | 39.45 | 41.84 | 16.87 | 51.46 | -- | -- | Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10380.00</td> <td>48.29</td> <td>68.30</td> <td>-20.01</td> <td>45.46</td> <td>39.45</td> <td>14.16</td> <td>50.78</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15570.00</td> <td>47.42</td> <td>74.00</td> <td>-26.58</td> <td>40.17</td> <td>41.84</td> <td>16.87</td> <td>51.46</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 10380.00 | 48.29 | 68.30 | -20.01 | 45.46 | 39.45 | 14.16 | 50.78 | -- | -- | Peak | 2 | 15570.00 | 47.42 | 74.00 | -26.58 | 40.17 | 41.84 | 16.87 | 51.46 | -- | -- |
| Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 10380.00 | 48.99 | 68.30 | -19.31 | 46.16 | 39.45 | 14.16 | 50.78 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 15570.00 | 46.70 | 74.00 | -27.30 | 39.45 | 41.84 | 16.87 | 51.46 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 10380.00 | 48.29 | 68.30 | -20.01 | 45.46 | 39.45 | 14.16 | 50.78 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 15570.00 | 47.42 | 74.00 | -26.58 | 40.17 | 41.84 | 16.87 | 51.46 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 8 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|-------|--------|--------|------------|------|------|----------------------|--------------|-------------|--|--|----|-----|------------------------------|-------|-------|-------|-------|-----|------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|------|-----|-------|--------|------|------|----------------------|--------------|-------------|--|--|----|-----|------------------------|-------|-------|-------|-------|-----|------------|
| | Band Edge - L | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-1_5.15-5.25_802.11n HT40_CH46_5230MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5030.02 53.38 74.00 -20.62</td> <td>38.97</td> <td>34.89</td> <td>11.15</td> <td>31.63</td> <td>360</td> <td>87 PEAK</td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | 1 5030.02 53.38 74.00 -20.62 | 38.97 | 34.89 | 11.15 | 31.63 | 360 | 87 PEAK | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5230.00 107.02 -----</td> <td>93.01</td> <td>34.85</td> <td>11.04</td> <td>31.88</td> <td>360</td> <td>87 PEAK</td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | 1 5230.00 107.02 ----- | 93.01 | 34.85 | 11.04 | 31.88 | 360 | 87 PEAK |
| | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5030.02 53.38 74.00 -20.62 | 38.97 | 34.89 | 11.15 | 31.63 | 360 | 87 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5230.00 107.02 ----- | 93.01 | 34.85 | 11.04 | 31.88 | 360 | 87 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5042.90 43.66 54.00 -10.34</td> <td>29.27</td> <td>34.89</td> <td>11.15</td> <td>31.65</td> <td>360</td> <td>87 AVERAGE</td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | 1 5042.90 43.66 54.00 -10.34 | 29.27 | 34.89 | 11.15 | 31.65 | 360 | 87 AVERAGE | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5230.00 100.83 -----</td> <td>86.82</td> <td>34.85</td> <td>11.04</td> <td>31.88</td> <td>360</td> <td>87 AVERAGE</td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | 1 5230.00 100.83 ----- | 86.82 | 34.85 | 11.04 | 31.88 | 360 | 87 AVERAGE |
| Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5042.90 43.66 54.00 -10.34 | 29.27 | 34.89 | 11.15 | 31.65 | 360 | 87 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5230.00 100.83 ----- | 86.82 | 34.85 | 11.04 | 31.88 | 360 | 87 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 8 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|--------|--------|--------|-------|--------|--------|------|--------|---------|-------|------|------|-------|--------|------|--------|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|----|---------|-------|
| | Band Edge - R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-1_5.15-5.25_802.11n HT40_CH46_5230MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <p>Date: 2024-06-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5447.01</td> <td>51.55</td> <td>74.00</td> <td>-22.45</td> <td>37.82</td> <td>34.81</td> <td>11.07</td> <td>32.15</td> <td>360</td> <td>87</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5447.01 | 51.55 | 74.00 | -22.45 | 37.82 | 34.81 | 11.07 | 32.15 | 360 | 87 | PEAK | Blank |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5447.01 | 51.55 | 74.00 | -22.45 | 37.82 | 34.81 | 11.07 | 32.15 | 360 | 87 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <p>Date: 2024-06-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5456.23</td> <td>43.05</td> <td>54.00</td> <td>-10.95</td> <td>29.30</td> <td>34.81</td> <td>11.10</td> <td>32.16</td> <td>360</td> <td>87</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5456.23 | 43.05 | 54.00 | -10.95 | 29.30 | 34.81 | 11.10 | 32.16 | 360 | 87 | AVERAGE | Blank |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5456.23 | 43.05 | 54.00 | -10.95 | 29.30 | 34.81 | 11.10 | 32.16 | 360 | 87 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 8 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|-------|--------|--------|-------------|------|------|----------------------|--------------|-------------|--|--|--|--------|-------------------|------|------|----|----|----|-----|------------------------------|-------|-------|-------|-------|-----|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|------|-----|-------|--------|------|------|----------------------|--------------|-------------|--|--|--|--------|-------------------|------|------|----|----|----|-----|------------------|-------|-------|-------|-------|-----|-------------|
| | Band Edge - L | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-1_5.15-5.25_802.11n HT40_CH46_5230MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5118.13 52.95 74.00 -21.05</td> <td>38.71</td> <td>34.88</td> <td>11.10</td> <td>31.74</td> <td>389</td> <td>360 PEAK</td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Freq Level Line (dB) | Level Factor | Loss Factor | | | | Remark | MHz dBuV/m dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 5118.13 52.95 74.00 -21.05 | 38.71 | 34.88 | 11.10 | 31.74 | 389 | 360 PEAK | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5230.00 102.32</td> <td>88.32</td> <td>34.85</td> <td>11.03</td> <td>31.88</td> <td>389</td> <td>360 PEAK</td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Freq Level Line (dB) | Level Factor | Loss Factor | | | | Remark | MHz dBuV/m dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 5230.00 102.32 | 88.32 | 34.85 | 11.03 | 31.88 | 389 | 360 PEAK |
| | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level Factor | Loss Factor | | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz dBuV/m dBuV/m | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5118.13 52.95 74.00 -21.05 | 38.71 | 34.88 | 11.10 | 31.74 | 389 | 360 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level Factor | Loss Factor | | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz dBuV/m dBuV/m | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5230.00 102.32 | 88.32 | 34.85 | 11.03 | 31.88 | 389 | 360 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5069.81 43.82 54.00 -10.18</td> <td>29.48</td> <td>34.89</td> <td>11.13</td> <td>31.68</td> <td>389</td> <td>360 AVERAGE</td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Freq Level Line (dB) | Level Factor | Loss Factor | | | | Remark | MHz dBuV/m dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 5069.81 43.82 54.00 -10.18 | 29.48 | 34.89 | 11.13 | 31.68 | 389 | 360 AVERAGE | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5230.00 95.67</td> <td>81.66</td> <td>34.85</td> <td>11.04</td> <td>31.88</td> <td>389</td> <td>360 AVERAGE</td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Freq Level Line (dB) | Level Factor | Loss Factor | | | | Remark | MHz dBuV/m dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 5230.00 95.67 | 81.66 | 34.85 | 11.04 | 31.88 | 389 | 360 AVERAGE |
| Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level Factor | Loss Factor | | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz dBuV/m dBuV/m | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5069.81 43.82 54.00 -10.18 | 29.48 | 34.89 | 11.13 | 31.68 | 389 | 360 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level Factor | Loss Factor | | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz dBuV/m dBuV/m | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5230.00 95.67 | 81.66 | 34.85 | 11.04 | 31.88 | 389 | 360 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 8 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|--------|--------|--------|-------|--------|--------|------|--------|---------|-------|------|------|-------|--------|------|--------|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|-----|---------|-------|
| | Band Edge - R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-1_5.15-5.25_802.11n HT40_CH46_5230MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <p>Date: 2024-06-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5457.13</td> <td>51.98</td> <td>74.00</td> <td>-22.02</td> <td>38.22</td> <td>34.81</td> <td>11.11</td> <td>32.16</td> <td>389</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5457.13 | 51.98 | 74.00 | -22.02 | 38.22 | 34.81 | 11.11 | 32.16 | 389 | 360 | PEAK | Blank |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5457.13 | 51.98 | 74.00 | -22.02 | 38.22 | 34.81 | 11.11 | 32.16 | 389 | 360 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <p>Date: 2024-06-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.68</td> <td>42.80</td> <td>54.00</td> <td>-11.20</td> <td>29.03</td> <td>34.81</td> <td>11.12</td> <td>32.16</td> <td>389</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5459.68 | 42.80 | 54.00 | -11.20 | 29.03 | 34.81 | 11.12 | 32.16 | 389 | 360 | AVERAGE | Blank |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5459.68 | 42.80 | 54.00 | -11.20 | 29.03 | 34.81 | 11.12 | 32.16 | 389 | 360 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 9 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------|-------|--------|-------------|--------|--------|-------|--------|------|-------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|------|-----|-------|--------|------|------|--------|------|-------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2A_5.25-5.35_802.11a_CH52_5260MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | <p style="text-align: right;">Date: 2024-06-28</p> | <p style="text-align: right;">Date: 2024-06-28</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10520.00</td> <td>49.29</td> <td>68.30</td> <td>-19.01</td> <td>46.34</td> <td>39.50</td> <td>14.25</td> <td>50.80</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15780.00</td> <td>48.66</td> <td>74.00</td> <td>-25.34</td> <td>41.28</td> <td>41.97</td> <td>17.04</td> <td>51.63</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 10520.00 | 49.29 | 68.30 | -19.01 | 46.34 | 39.50 | 14.25 | 50.80 | -- | -- | Peak | 2 | 15780.00 | 48.66 | 74.00 | -25.34 | 41.28 | 41.97 | 17.04 | 51.63 | -- | -- | Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10520.00</td> <td>48.35</td> <td>68.30</td> <td>-19.95</td> <td>45.40</td> <td>39.50</td> <td>14.25</td> <td>50.80</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15780.00</td> <td>48.87</td> <td>74.00</td> <td>-25.13</td> <td>41.49</td> <td>41.97</td> <td>17.04</td> <td>51.63</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 10520.00 | 48.35 | 68.30 | -19.95 | 45.40 | 39.50 | 14.25 | 50.80 | -- | -- | Peak | 2 | 15780.00 | 48.87 | 74.00 | -25.13 | 41.49 | 41.97 | 17.04 | 51.63 | -- | -- |
| Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 10520.00 | 49.29 | 68.30 | -19.01 | 46.34 | 39.50 | 14.25 | 50.80 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 15780.00 | 48.66 | 74.00 | -25.34 | 41.28 | 41.97 | 17.04 | 51.63 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 10520.00 | 48.35 | 68.30 | -19.95 | 45.40 | 39.50 | 14.25 | 50.80 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 15780.00 | 48.87 | 74.00 | -25.13 | 41.49 | 41.97 | 17.04 | 51.63 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|-------|--------|-------------|--------|--------|-------|--------|------|-------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|------|-----|-------|--------|------|------|--------|------|-------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2A_5.25-5.35_802.11a_CH60_5300MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | <p>Date: 2024-06-28</p> | <p>Date: 2024-06-28</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10600.00</td> <td>48.56</td> <td>74.00</td> <td>-25.44</td> <td>45.58</td> <td>39.48</td> <td>14.30</td> <td>50.80</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15900.00</td> <td>48.40</td> <td>74.00</td> <td>-25.60</td> <td>40.94</td> <td>42.04</td> <td>17.14</td> <td>51.72</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 10600.00 | 48.56 | 74.00 | -25.44 | 45.58 | 39.48 | 14.30 | 50.80 | -- | -- | Peak | 2 | 15900.00 | 48.40 | 74.00 | -25.60 | 40.94 | 42.04 | 17.14 | 51.72 | -- | -- | Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10600.00</td> <td>47.54</td> <td>74.00</td> <td>-26.46</td> <td>44.56</td> <td>39.48</td> <td>14.30</td> <td>50.80</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15900.00</td> <td>47.05</td> <td>74.00</td> <td>-26.95</td> <td>39.59</td> <td>42.04</td> <td>17.14</td> <td>51.72</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 10600.00 | 47.54 | 74.00 | -26.46 | 44.56 | 39.48 | 14.30 | 50.80 | -- | -- | Peak | 2 | 15900.00 | 47.05 | 74.00 | -26.95 | 39.59 | 42.04 | 17.14 | 51.72 | -- | -- |
| Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 10600.00 | 48.56 | 74.00 | -25.44 | 45.58 | 39.48 | 14.30 | 50.80 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 15900.00 | 48.40 | 74.00 | -25.60 | 40.94 | 42.04 | 17.14 | 51.72 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 10600.00 | 47.54 | 74.00 | -26.46 | 44.56 | 39.48 | 14.30 | 50.80 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 15900.00 | 47.05 | 74.00 | -26.95 | 39.59 | 42.04 | 17.14 | 51.72 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 11 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|--------|-------|--------|-------------|--------|--------|------------|--------|------|-------|------|------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|----|-----|-----------|-------|-------|--------|-------|-------|-------|-------|-----|------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|--------|------|-----|-------|--------|------|------|--------|------|-------|------|------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|----|-----|-----------|--------|-------|-------|-------|-------|-------|-------|-----|------------|
| | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5350.00</td> <td>63.98</td> <td>74.00</td> <td>-10.02</td> <td>50.24</td> <td>34.83</td> <td>10.94</td> <td>32.03</td> <td>383</td> <td>66 PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5350.00 | 63.98 | 74.00 | -10.02 | 50.24 | 34.83 | 10.94 | 32.03 | 383 | 66 PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5320.00</td> <td>110.32</td> <td>-----</td> <td>-----</td> <td>96.49</td> <td>34.84</td> <td>10.97</td> <td>31.98</td> <td>383</td> <td>66 PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5320.00 | 110.32 | ----- | ----- | 96.49 | 34.84 | 10.97 | 31.98 | 383 | 66 PEAK |
| | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5350.00 | 63.98 | 74.00 | -10.02 | 50.24 | 34.83 | 10.94 | 32.03 | 383 | 66 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5320.00 | 110.32 | ----- | ----- | 96.49 | 34.84 | 10.97 | 31.98 | 383 | 66 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5350.00</td> <td>49.16</td> <td>54.00</td> <td>-4.84</td> <td>35.42</td> <td>34.83</td> <td>10.94</td> <td>32.03</td> <td>383</td> <td>66 AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5350.00 | 49.16 | 54.00 | -4.84 | 35.42 | 34.83 | 10.94 | 32.03 | 383 | 66 AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5320.00</td> <td>104.28</td> <td>-----</td> <td>-----</td> <td>90.46</td> <td>34.84</td> <td>10.97</td> <td>31.99</td> <td>383</td> <td>66 AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5320.00 | 104.28 | ----- | ----- | 90.46 | 34.84 | 10.97 | 31.99 | 383 | 66 AVERAGE |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5350.00 | 49.16 | 54.00 | -4.84 | 35.42 | 34.83 | 10.94 | 32.03 | 383 | 66 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5320.00 | 104.28 | ----- | ----- | 90.46 | 34.84 | 10.97 | 31.99 | 383 | 66 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 11 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|--------|--------|--------|--------|--------|--------|--------|--------|---------|-------|------|------|-------|--------|------|--------|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|--------|-------|--------|-------|-------|-------|-------|-----|-----|---------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|--------|------|-----|-------|--------|------|------|--------|------|-------|------|------|-------|--------|------|--------|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|--------|-------|--------|-------|-------|-------|-------|-----|-----|---------|
| | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.00</td> <td>106.89</td> <td>74.00</td> <td>-14.61</td> <td>45.65</td> <td>34.83</td> <td>10.94</td> <td>32.03</td> <td>396</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5350.00 | 106.89 | 74.00 | -14.61 | 45.65 | 34.83 | 10.94 | 32.03 | 396 | 360 | PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>106.89</td> <td>74.00</td> <td>-14.61</td> <td>45.65</td> <td>34.83</td> <td>10.94</td> <td>32.03</td> <td>396</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5320.00 | 106.89 | 74.00 | -14.61 | 45.65 | 34.83 | 10.94 | 32.03 | 396 | 360 | PEAK |
| | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5350.00 | 106.89 | 74.00 | -14.61 | 45.65 | 34.83 | 10.94 | 32.03 | 396 | 360 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5320.00 | 106.89 | 74.00 | -14.61 | 45.65 | 34.83 | 10.94 | 32.03 | 396 | 360 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.00</td> <td>46.30</td> <td>54.00</td> <td>-7.70</td> <td>32.56</td> <td>34.83</td> <td>10.94</td> <td>32.03</td> <td>396</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5350.00 | 46.30 | 54.00 | -7.70 | 32.56 | 34.83 | 10.94 | 32.03 | 396 | 360 | AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>100.15</td> <td>54.00</td> <td>-46.15</td> <td>46.30</td> <td>34.84</td> <td>10.97</td> <td>31.99</td> <td>396</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5320.00 | 100.15 | 54.00 | -46.15 | 46.30 | 34.84 | 10.97 | 31.99 | 396 | 360 | AVERAGE |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5350.00 | 46.30 | 54.00 | -7.70 | 32.56 | 34.83 | 10.94 | 32.03 | 396 | 360 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5320.00 | 100.15 | 54.00 | -46.15 | 46.30 | 34.84 | 10.97 | 31.99 | 396 | 360 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 11 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|--------|--------|--------|--------|--------|-------|--------|------|-------|------|--------|-------|--------|------|--------|-----|--------|--------|----|------|------|----|----|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|------|-----|-------|--------|------|------|--------|------|-------|------|--------|-------|--------|------|--------|-----|--------|--------|----|------|------|----|----|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | <p>Date: 2024-06-28</p> | <p>Date: 2024-06-28</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10640.00</td> <td>47.99</td> <td>74.00</td> <td>-26.01</td> <td>45.00</td> <td>39.47</td> <td>14.32</td> <td>50.80</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15960.00</td> <td>47.88</td> <td>74.00</td> <td>-26.12</td> <td>40.38</td> <td>42.08</td> <td>17.19</td> <td>51.77</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 10640.00 | 47.99 | 74.00 | -26.01 | 45.00 | 39.47 | 14.32 | 50.80 | -- | -- | Peak | 2 | 15960.00 | 47.88 | 74.00 | -26.12 | 40.38 | 42.08 | 17.19 | 51.77 | -- | -- | Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10640.00</td> <td>48.76</td> <td>74.00</td> <td>-25.24</td> <td>45.77</td> <td>39.47</td> <td>14.32</td> <td>50.80</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15960.00</td> <td>47.35</td> <td>74.00</td> <td>-26.65</td> <td>39.85</td> <td>42.08</td> <td>17.19</td> <td>51.77</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 10640.00 | 48.76 | 74.00 | -25.24 | 45.77 | 39.47 | 14.32 | 50.80 | -- | -- | Peak | 2 | 15960.00 | 47.35 | 74.00 | -26.65 | 39.85 | 42.08 | 17.19 | 51.77 | -- | -- |
| Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 10640.00 | 47.99 | 74.00 | -26.01 | 45.00 | 39.47 | 14.32 | 50.80 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 15960.00 | 47.88 | 74.00 | -26.12 | 40.38 | 42.08 | 17.19 | 51.77 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 10640.00 | 48.76 | 74.00 | -25.24 | 45.77 | 39.47 | 14.32 | 50.80 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 15960.00 | 47.35 | 74.00 | -26.65 | 39.85 | 42.08 | 17.19 | 51.77 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |







| Mode | 12 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|--------|--------|--------|--------|--------|-------|----|------|-------|------|--------|-------|--------|------|--------|-----|--------|--------|----|------|------|----|----|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|------|-----|-------|--------|------|------|--|------|-------|------|--------|-------|--------|------|--------|-----|--------|--------|----|------|------|----|----|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2A_5.25-5.35_802.11n HT20_CH52_5260MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10520.00</td> <td>48.16</td> <td>68.30</td> <td>-20.14</td> <td>45.21</td> <td>39.50</td> <td>14.25</td> <td>50.80</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15780.00</td> <td>49.02</td> <td>74.00</td> <td>-24.98</td> <td>41.64</td> <td>41.97</td> <td>17.04</td> <td>51.63</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Apos | TPos | | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 10520.00 | 48.16 | 68.30 | -20.14 | 45.21 | 39.50 | 14.25 | 50.80 | -- | -- | Peak | 2 | 15780.00 | 49.02 | 74.00 | -24.98 | 41.64 | 41.97 | 17.04 | 51.63 | -- | -- | Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10520.00</td> <td>48.76</td> <td>68.30</td> <td>-19.54</td> <td>45.81</td> <td>39.50</td> <td>14.25</td> <td>50.80</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15780.00</td> <td>48.85</td> <td>74.00</td> <td>-25.15</td> <td>41.47</td> <td>41.97</td> <td>17.04</td> <td>51.63</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Apos | TPos | | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 10520.00 | 48.76 | 68.30 | -19.54 | 45.81 | 39.50 | 14.25 | 50.80 | -- | -- | Peak | 2 | 15780.00 | 48.85 | 74.00 | -25.15 | 41.47 | 41.97 | 17.04 | 51.63 | -- | -- |
| Limit | Read | Ant | Cable | Preamp | Apos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 10520.00 | 48.16 | 68.30 | -20.14 | 45.21 | 39.50 | 14.25 | 50.80 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 15780.00 | 49.02 | 74.00 | -24.98 | 41.64 | 41.97 | 17.04 | 51.63 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Apos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 10520.00 | 48.76 | 68.30 | -19.54 | 45.81 | 39.50 | 14.25 | 50.80 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 15780.00 | 48.85 | 74.00 | -25.15 | 41.47 | 41.97 | 17.04 | 51.63 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 13 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|-------|--------|-------------|--------|--------|-------|--------|------|-------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|--|--|--|--|--|--|----|-----|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|------|-----|-------|--------|------|------|--------|------|-------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|--|--|--|--|--|--|----|-----|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2A_5.25-5.35_802.11n HT20_CH60_5300MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | <p>Date: 2024-06-28</p> | <p>Date: 2024-06-28</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10600.00</td> <td>48.61</td> <td>74.00</td> <td>-25.39</td> <td>45.63</td> <td>39.48</td> <td>14.30</td> <td>50.80</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15900.00</td> <td>47.76</td> <td>74.00</td> <td>-26.24</td> <td>40.30</td> <td>42.04</td> <td>17.14</td> <td>51.72</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | cm | deg | 1 | 10600.00 | 48.61 | 74.00 | -25.39 | 45.63 | 39.48 | 14.30 | 50.80 | -- | -- | Peak | 2 | 15900.00 | 47.76 | 74.00 | -26.24 | 40.30 | 42.04 | 17.14 | 51.72 | -- | -- | Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10600.00</td> <td>48.45</td> <td>74.00</td> <td>-25.55</td> <td>45.47</td> <td>39.48</td> <td>14.30</td> <td>50.80</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15900.00</td> <td>47.87</td> <td>74.00</td> <td>-26.13</td> <td>40.41</td> <td>42.04</td> <td>17.14</td> <td>51.72</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | cm | deg | 1 | 10600.00 | 48.45 | 74.00 | -25.55 | 45.47 | 39.48 | 14.30 | 50.80 | -- | -- | Peak | 2 | 15900.00 | 47.87 | 74.00 | -26.13 | 40.41 | 42.04 | 17.14 | 51.72 | -- | -- |
| Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 10600.00 | 48.61 | 74.00 | -25.39 | 45.63 | 39.48 | 14.30 | 50.80 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 15900.00 | 47.76 | 74.00 | -26.24 | 40.30 | 42.04 | 17.14 | 51.72 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 10600.00 | 48.45 | 74.00 | -25.55 | 45.47 | 39.48 | 14.30 | 50.80 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 15900.00 | 47.87 | 74.00 | -26.13 | 40.41 | 42.04 | 17.14 | 51.72 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

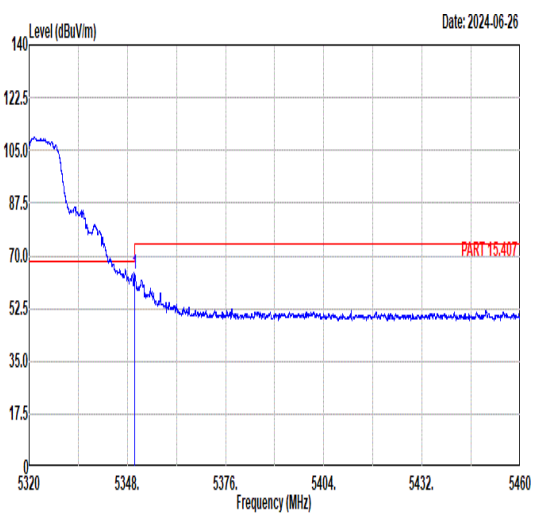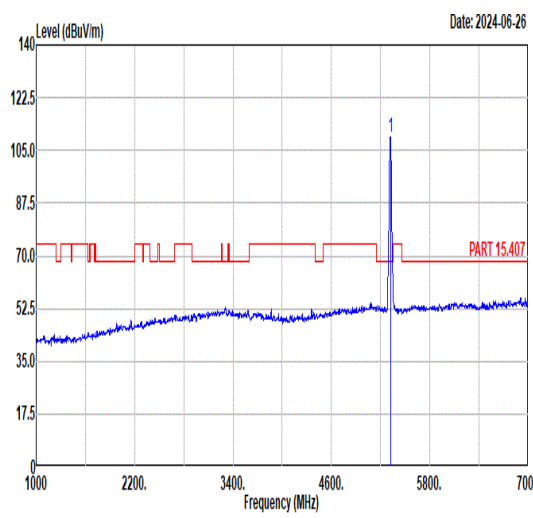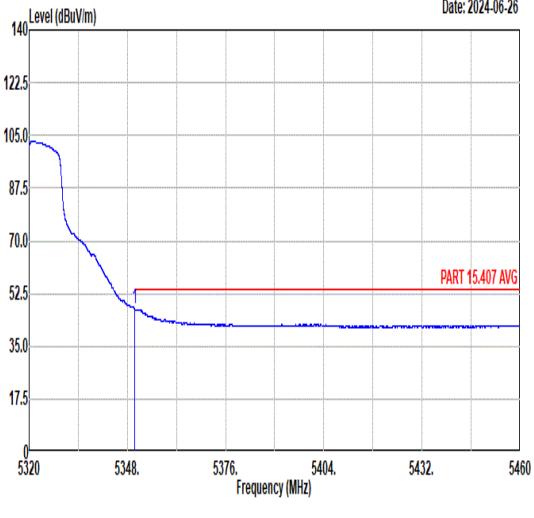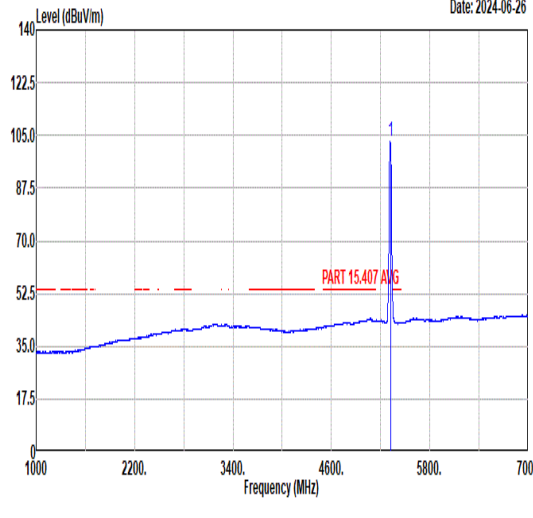

| Mode | 14 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|--------|--------|--------|--------|--------|--------|--------|--------|---------|-------|------|------|-------|--------|------|--------|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|----|---------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|--------|------|-----|-------|--------|------|------|--------|------|-------|------|------|-------|--------|------|--------|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|--------|-------|-------|-------|-------|-------|-------|-----|----|---------|
| | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2A_5.25-5.35_802.11n HT20_CH64_5320MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak |  <p>Level (dBuV/m) vs Frequency (MHz) plot for Horizontal polarization. The plot shows a signal level starting at 105.0 dBuV/m at 5320 MHz and decreasing to approximately 52.5 dBuV/m at 5460 MHz. A red limit line is shown at 70.0 dBuV/m. A peak is marked at 5350.00 MHz with a level of 63.97 dBuV/m. The date is 2024-06-26.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.00</td> <td>63.97</td> <td>74.00</td> <td>-10.03</td> <td>50.23</td> <td>34.83</td> <td>10.94</td> <td>32.03</td> <td>400</td> <td>68</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5350.00 | 63.97 | 74.00 | -10.03 | 50.23 | 34.83 | 10.94 | 32.03 | 400 | 68 | PEAK |  <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The plot shows a signal level starting at approximately 40 dBuV/m at 1000 MHz and increasing to a peak of 109.37 dBuV/m at 5320.00 MHz. A red limit line is shown at 70.0 dBuV/m. The date is 2024-06-26.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>109.37</td> <td>-----</td> <td>-----</td> <td>95.57</td> <td>34.84</td> <td>10.96</td> <td>32.00</td> <td>400</td> <td>68</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5320.00 | 109.37 | ----- | ----- | 95.57 | 34.84 | 10.96 | 32.00 | 400 | 68 | PEAK |
| | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5350.00 | 63.97 | 74.00 | -10.03 | 50.23 | 34.83 | 10.94 | 32.03 | 400 | 68 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5320.00 | 109.37 | ----- | ----- | 95.57 | 34.84 | 10.96 | 32.00 | 400 | 68 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg |  <p>Level (dBuV/m) vs Frequency (MHz) plot for Horizontal polarization showing the average signal. The plot shows a signal level starting at 105.0 dBuV/m at 5320 MHz and decreasing to approximately 47.63 dBuV/m at 5460 MHz. A red limit line is shown at 54.00 dBuV/m. The date is 2024-06-26.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.00</td> <td>47.63</td> <td>54.00</td> <td>-6.37</td> <td>33.89</td> <td>34.83</td> <td>10.94</td> <td>32.03</td> <td>400</td> <td>68</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5350.00 | 47.63 | 54.00 | -6.37 | 33.89 | 34.83 | 10.94 | 32.03 | 400 | 68 | AVERAGE |  <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization showing the average signal. The plot shows a signal level starting at approximately 40 dBuV/m at 1000 MHz and increasing to a peak of 102.79 dBuV/m at 5320.00 MHz. A red limit line is shown at 54.00 dBuV/m. The date is 2024-06-26.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>102.79</td> <td>-----</td> <td>-----</td> <td>88.97</td> <td>34.84</td> <td>10.97</td> <td>31.99</td> <td>400</td> <td>68</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5320.00 | 102.79 | ----- | ----- | 88.97 | 34.84 | 10.97 | 31.99 | 400 | 68 | AVERAGE |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5350.00 | 47.63 | 54.00 | -6.37 | 33.89 | 34.83 | 10.94 | 32.03 | 400 | 68 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5320.00 | 102.79 | ----- | ----- | 88.97 | 34.84 | 10.97 | 31.99 | 400 | 68 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 14 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|-------|--------|--------|-------------|------|------|----------------------|--------------|-------------|--|--|----|-----|------------------------------|-------|-------|-------|-------|-----|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|------|-----|-------|--------|------|------|----------------------|--------------|-------------|--|--|----|-----|------------------------|-------|-------|-------|-------|-----|-------------|
| | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2A_5.25-5.35_802.11n HT20_CH64_5320MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <p style="text-align: right;">Date: 2024-06-26</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5351.85 57.42 74.00 -16.58</td> <td>43.68</td> <td>34.83</td> <td>10.94</td> <td>32.03</td> <td>397</td> <td>360 PEAK</td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | 1 5351.85 57.42 74.00 -16.58 | 43.68 | 34.83 | 10.94 | 32.03 | 397 | 360 PEAK | <p style="text-align: right;">Date: 2024-06-26</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5320.00 105.61 -----</td> <td>91.79</td> <td>34.84</td> <td>10.97</td> <td>31.99</td> <td>397</td> <td>360 PEAK</td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | 1 5320.00 105.61 ----- | 91.79 | 34.84 | 10.97 | 31.99 | 397 | 360 PEAK |
| | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5351.85 57.42 74.00 -16.58 | 43.68 | 34.83 | 10.94 | 32.03 | 397 | 360 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5320.00 105.61 ----- | 91.79 | 34.84 | 10.97 | 31.99 | 397 | 360 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <p style="text-align: right;">Date: 2024-06-26</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5350.17 43.70 54.00 -10.30</td> <td>29.96</td> <td>34.83</td> <td>10.94</td> <td>32.03</td> <td>397</td> <td>360 AVERAGE</td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | 1 5350.17 43.70 54.00 -10.30 | 29.96 | 34.83 | 10.94 | 32.03 | 397 | 360 AVERAGE | <p style="text-align: right;">Date: 2024-06-26</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5320.00 99.18 -----</td> <td>85.36</td> <td>34.84</td> <td>10.97</td> <td>31.99</td> <td>397</td> <td>360 AVERAGE</td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | 1 5320.00 99.18 ----- | 85.36 | 34.84 | 10.97 | 31.99 | 397 | 360 AVERAGE |
| Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5350.17 43.70 54.00 -10.30 | 29.96 | 34.83 | 10.94 | 32.03 | 397 | 360 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5320.00 99.18 ----- | 85.36 | 34.84 | 10.97 | 31.99 | 397 | 360 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 14 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|-------|--------|-------------|--------|--------|-------|--------|------|-------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|------|-----|-------|--------|------|------|--------|------|-------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2A_5.25-5.35_802.11n HT20_CH64_5320MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | <p>Date: 2024-06-28</p> | <p>Date: 2024-06-28</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10640.00</td> <td>48.35</td> <td>74.00</td> <td>-25.65</td> <td>45.36</td> <td>39.47</td> <td>14.32</td> <td>50.80</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15960.00</td> <td>49.21</td> <td>74.00</td> <td>-24.79</td> <td>41.71</td> <td>42.08</td> <td>17.19</td> <td>51.77</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 10640.00 | 48.35 | 74.00 | -25.65 | 45.36 | 39.47 | 14.32 | 50.80 | -- | -- | Peak | 2 | 15960.00 | 49.21 | 74.00 | -24.79 | 41.71 | 42.08 | 17.19 | 51.77 | -- | -- | Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10640.00</td> <td>48.23</td> <td>74.00</td> <td>-25.77</td> <td>45.24</td> <td>39.47</td> <td>14.32</td> <td>50.80</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15960.00</td> <td>47.43</td> <td>74.00</td> <td>-26.57</td> <td>39.93</td> <td>42.08</td> <td>17.19</td> <td>51.77</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 10640.00 | 48.23 | 74.00 | -25.77 | 45.24 | 39.47 | 14.32 | 50.80 | -- | -- | Peak | 2 | 15960.00 | 47.43 | 74.00 | -26.57 | 39.93 | 42.08 | 17.19 | 51.77 | -- | -- |
| Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 10640.00 | 48.35 | 74.00 | -25.65 | 45.36 | 39.47 | 14.32 | 50.80 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 15960.00 | 49.21 | 74.00 | -24.79 | 41.71 | 42.08 | 17.19 | 51.77 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 10640.00 | 48.23 | 74.00 | -25.77 | 45.24 | 39.47 | 14.32 | 50.80 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 15960.00 | 47.43 | 74.00 | -26.57 | 39.93 | 42.08 | 17.19 | 51.77 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 15 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|-------|--------|--------|------------|------|------|----------------------|--------------|-------------|--|--|--|--------|-------------------|------|------|----|----|----|-----|------------------------------|-------|-------|-------|-------|-----|------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|------|-----|-------|--------|------|------|----------------------|--------------|-------------|--|--|--|--------|-------------------|------|------|----|----|----|-----|------------------------|-------|-------|-------|-------|-----|------------|
| | Band Edge - L | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2A_5.25-5.35_802.11n HT40_CH54_5270MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5039.02 52.67 74.00 -21.33</td> <td>38.27</td> <td>34.89</td> <td>11.15</td> <td>31.64</td> <td>356</td> <td>86 PEAK</td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Freq Level Line (dB) | Level Factor | Loss Factor | | | | Remark | MHz dBuV/m dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 5039.02 52.67 74.00 -21.33 | 38.27 | 34.89 | 11.15 | 31.64 | 356 | 86 PEAK | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5270.00 105.86 -----</td> <td>91.96</td> <td>34.84</td> <td>11.00</td> <td>31.94</td> <td>356</td> <td>86 PEAK</td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Freq Level Line (dB) | Level Factor | Loss Factor | | | | Remark | MHz dBuV/m dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 5270.00 105.86 ----- | 91.96 | 34.84 | 11.00 | 31.94 | 356 | 86 PEAK |
| | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level Factor | Loss Factor | | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz dBuV/m dBuV/m | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5039.02 52.67 74.00 -21.33 | 38.27 | 34.89 | 11.15 | 31.64 | 356 | 86 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level Factor | Loss Factor | | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz dBuV/m dBuV/m | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5270.00 105.86 ----- | 91.96 | 34.84 | 11.00 | 31.94 | 356 | 86 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5094.93 43.85 54.00 -10.15</td> <td>29.56</td> <td>34.88</td> <td>11.12</td> <td>31.71</td> <td>356</td> <td>86 AVERAGE</td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Freq Level Line (dB) | Level Factor | Loss Factor | | | | Remark | MHz dBuV/m dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 5094.93 43.85 54.00 -10.15 | 29.56 | 34.88 | 11.12 | 31.71 | 356 | 86 AVERAGE | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5270.00 99.62 -----</td> <td>85.68</td> <td>34.85</td> <td>11.01</td> <td>31.92</td> <td>356</td> <td>86 AVERAGE</td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Freq Level Line (dB) | Level Factor | Loss Factor | | | | Remark | MHz dBuV/m dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 5270.00 99.62 ----- | 85.68 | 34.85 | 11.01 | 31.92 | 356 | 86 AVERAGE |
| Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level Factor | Loss Factor | | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz dBuV/m dBuV/m | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5094.93 43.85 54.00 -10.15 | 29.56 | 34.88 | 11.12 | 31.71 | 356 | 86 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level Factor | Loss Factor | | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz dBuV/m dBuV/m | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5270.00 99.62 ----- | 85.68 | 34.85 | 11.01 | 31.92 | 356 | 86 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 15 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|--------|--------|--------|-------|--------|--------|------|--------|---------|-------|------|------|-------|--------|------|--------|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|----|---------|-------|
| | Band Edge - R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2A_5.25-5.35_802.11n HT40_CH54_5270MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <p>Date: 2024-06-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5395.69</td> <td>51.82</td> <td>74.00</td> <td>-22.18</td> <td>38.18</td> <td>34.82</td> <td>10.91</td> <td>32.09</td> <td>356</td> <td>86</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5395.69 | 51.82 | 74.00 | -22.18 | 38.18 | 34.82 | 10.91 | 32.09 | 356 | 86 | PEAK | Blank |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5395.69 | 51.82 | 74.00 | -22.18 | 38.18 | 34.82 | 10.91 | 32.09 | 356 | 86 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <p>Date: 2024-06-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5457.83</td> <td>42.86</td> <td>54.00</td> <td>-11.14</td> <td>29.10</td> <td>34.81</td> <td>11.11</td> <td>32.16</td> <td>356</td> <td>86</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5457.83 | 42.86 | 54.00 | -11.14 | 29.10 | 34.81 | 11.11 | 32.16 | 356 | 86 | AVERAGE | Blank |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5457.83 | 42.86 | 54.00 | -11.14 | 29.10 | 34.81 | 11.11 | 32.16 | 356 | 86 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |







| Mode | 15 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|-------|--------|--------|-------------|------|------|----------------------|--------------|-------------|--|--|----|-----|------------------------------|-------|-------|-------|-------|-----|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|------|-----|-------|--------|------|------|----------------------|--------------|-------------|--|--|----|-----|------------------|-------|-------|-------|-------|-----|-------------|
| | Band Edge - L | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2A_5.25-5.35_802.11n HT40_CH54_5270MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5126.52 53.65 74.00 -20.35</td> <td>39.43</td> <td>34.87</td> <td>11.10</td> <td>31.75</td> <td>382</td> <td>360 PEAK</td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | 1 5126.52 53.65 74.00 -20.35 | 39.43 | 34.87 | 11.10 | 31.75 | 382 | 360 PEAK | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5270.00 102.17</td> <td>88.23</td> <td>34.85</td> <td>11.01</td> <td>31.92</td> <td>382</td> <td>360 PEAK</td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | 1 5270.00 102.17 | 88.23 | 34.85 | 11.01 | 31.92 | 382 | 360 PEAK |
| | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5126.52 53.65 74.00 -20.35 | 39.43 | 34.87 | 11.10 | 31.75 | 382 | 360 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5270.00 102.17 | 88.23 | 34.85 | 11.01 | 31.92 | 382 | 360 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5057.40 43.64 54.00 -10.36</td> <td>29.28</td> <td>34.89</td> <td>11.14</td> <td>31.67</td> <td>382</td> <td>360 AVERAGE</td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | 1 5057.40 43.64 54.00 -10.36 | 29.28 | 34.89 | 11.14 | 31.67 | 382 | 360 AVERAGE | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5270.00 95.91</td> <td>81.97</td> <td>34.85</td> <td>11.01</td> <td>31.92</td> <td>382</td> <td>360 AVERAGE</td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | 1 5270.00 95.91 | 81.97 | 34.85 | 11.01 | 31.92 | 382 | 360 AVERAGE |
| Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5057.40 43.64 54.00 -10.36 | 29.28 | 34.89 | 11.14 | 31.67 | 382 | 360 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5270.00 95.91 | 81.97 | 34.85 | 11.01 | 31.92 | 382 | 360 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 15 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|--------|--------|--------|-------|--------|--------|------|--------|---------|-------|------|------|-------|--------|------|--------|--|-----|--------|--------|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|-----|---------|-------|
| | Band Edge - R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2A_5.25-5.35_802.11n HT40_CH54_5270MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5392.47</td> <td>51.95</td> <td>74.00</td> <td>-22.05</td> <td>38.30</td> <td>34.82</td> <td>10.91</td> <td>32.08</td> <td>382</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5392.47 | 51.95 | 74.00 | -22.05 | 38.30 | 34.82 | 10.91 | 32.08 | 382 | 360 | PEAK | Blank |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5392.47 | 51.95 | 74.00 | -22.05 | 38.30 | 34.82 | 10.91 | 32.08 | 382 | 360 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5360.73</td> <td>43.08</td> <td>54.00</td> <td>-10.92</td> <td>29.35</td> <td>34.83</td> <td>10.94</td> <td>32.04</td> <td>382</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5360.73 | 43.08 | 54.00 | -10.92 | 29.35 | 34.83 | 10.94 | 32.04 | 382 | 360 | AVERAGE | Blank |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5360.73 | 43.08 | 54.00 | -10.92 | 29.35 | 34.83 | 10.94 | 32.04 | 382 | 360 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

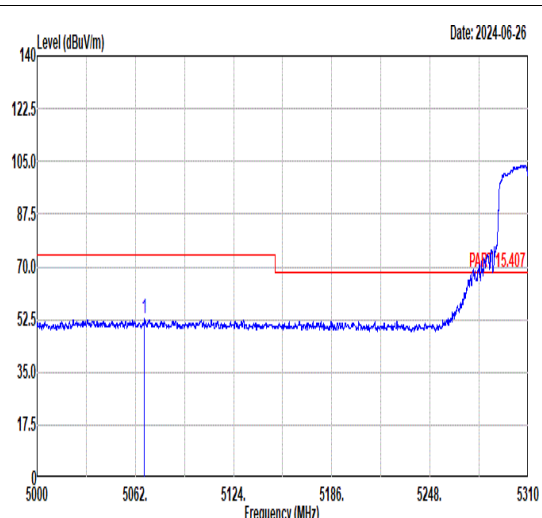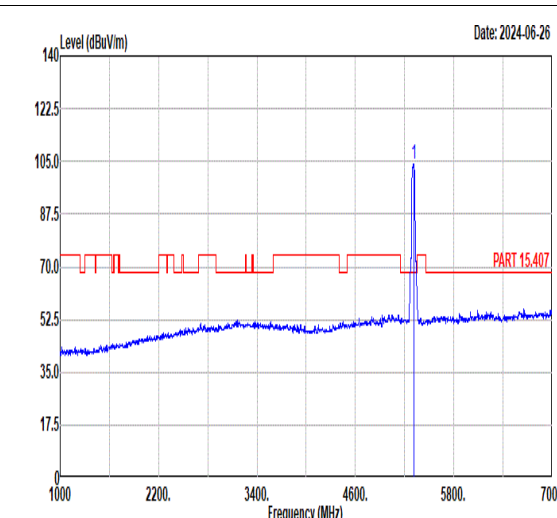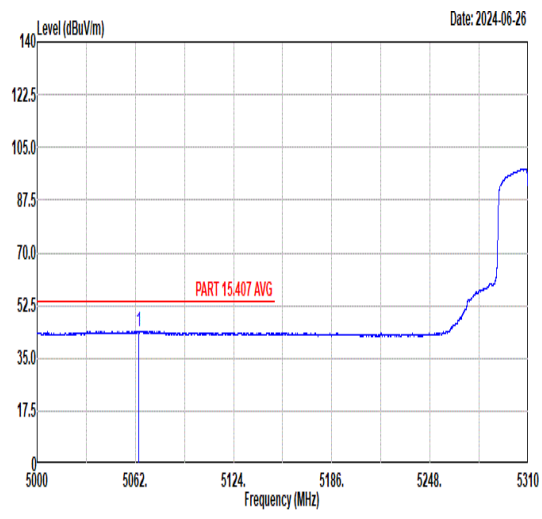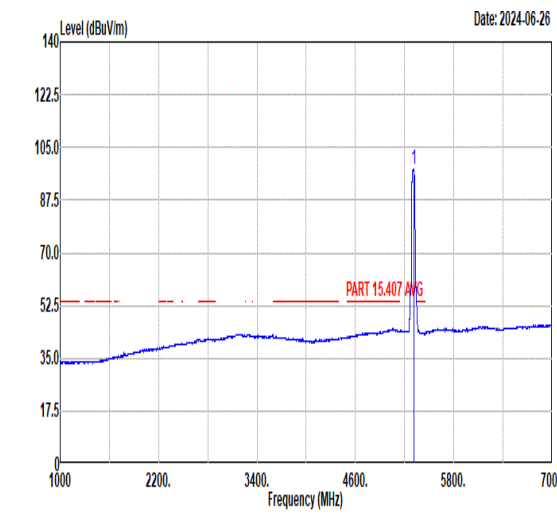

| Mode | 16 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|--------|--------|--------|--------|--------|--------|--------|------------|------|-------|------|------|-------|--------|------|--------|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|--------|------|-----|-------|--------|------|------|--------|------|-------|------|------|-------|--------|------|--------|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|--------|-------|-------|-------|-------|-------|-------|-----|------------|
| | Band Edge - L | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2A_5.25-5.35_802.11n HT40_CH62_5310MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak |  <p>Date: 2024-06-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5067.77</td> <td>52.91</td> <td>74.00</td> <td>-21.09</td> <td>38.57</td> <td>34.89</td> <td>11.13</td> <td>31.68</td> <td>343</td> <td>73 PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5067.77 | 52.91 | 74.00 | -21.09 | 38.57 | 34.89 | 11.13 | 31.68 | 343 | 73 PEAK |  <p>Date: 2024-06-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5310.00</td> <td>103.96</td> <td>-----</td> <td>-----</td> <td>90.11</td> <td>34.84</td> <td>10.98</td> <td>31.97</td> <td>343</td> <td>73 PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5310.00 | 103.96 | ----- | ----- | 90.11 | 34.84 | 10.98 | 31.97 | 343 | 73 PEAK |
| | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5067.77 | 52.91 | 74.00 | -21.09 | 38.57 | 34.89 | 11.13 | 31.68 | 343 | 73 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5310.00 | 103.96 | ----- | ----- | 90.11 | 34.84 | 10.98 | 31.97 | 343 | 73 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg |  <p>Date: 2024-06-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5064.02</td> <td>43.95</td> <td>54.00</td> <td>-10.05</td> <td>29.60</td> <td>34.89</td> <td>11.13</td> <td>31.67</td> <td>343</td> <td>73 AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5064.02 | 43.95 | 54.00 | -10.05 | 29.60 | 34.89 | 11.13 | 31.67 | 343 | 73 AVERAGE |  <p>Date: 2024-06-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5310.00</td> <td>97.84</td> <td>-----</td> <td>-----</td> <td>83.99</td> <td>34.84</td> <td>10.98</td> <td>31.97</td> <td>343</td> <td>73 AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5310.00 | 97.84 | ----- | ----- | 83.99 | 34.84 | 10.98 | 31.97 | 343 | 73 AVERAGE |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5064.02 | 43.95 | 54.00 | -10.05 | 29.60 | 34.89 | 11.13 | 31.67 | 343 | 73 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5310.00 | 97.84 | ----- | ----- | 83.99 | 34.84 | 10.98 | 31.97 | 343 | 73 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 16 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|--------|--------|--------|-------|--------|-------|------|------|---------|------|------|-------|--------|------|--------|-----|--------|--------|----|------|------|----|----|--|--|--|--|--|--|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|----|---------|-------|
| | Band Edge - R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2A_5.25-5.35_802.11n HT40_CH62_5310MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.13</td> <td>60.52</td> <td>74.00</td> <td>-13.48</td> <td>46.78</td> <td>34.83</td> <td>10.94</td> <td>32.03</td> <td>343</td> <td>73</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | cm | deg | 1 | 5350.13 | 60.52 | 74.00 | -13.48 | 46.78 | 34.83 | 10.94 | 32.03 | 343 | 73 | PEAK | Blank |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5350.13 | 60.52 | 74.00 | -13.48 | 46.78 | 34.83 | 10.94 | 32.03 | 343 | 73 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.43</td> <td>50.50</td> <td>54.00</td> <td>-3.50</td> <td>36.76</td> <td>34.83</td> <td>10.94</td> <td>32.03</td> <td>343</td> <td>73</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | cm | deg | 1 | 5350.43 | 50.50 | 54.00 | -3.50 | 36.76 | 34.83 | 10.94 | 32.03 | 343 | 73 | AVERAGE | Blank |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5350.43 | 50.50 | 54.00 | -3.50 | 36.76 | 34.83 | 10.94 | 32.03 | 343 | 73 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 16 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|--------|--------|--------|--------|--------|--------|--------|--------|---------|-------|------|------|-------|--------|------|--------|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|-----|---------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|--------|------|-----|-------|--------|------|------|--------|------|-------|------|------|-------|--------|------|--------|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|--------|-------|-------|-------|-------|-------|-------|-----|-----|---------|
| | Band Edge - L | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2A_5.25-5.35_802.11n HT40_CH62_5310MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5055.65</td> <td>52.97</td> <td>74.00</td> <td>-21.03</td> <td>38.60</td> <td>34.89</td> <td>11.14</td> <td>31.66</td> <td>397</td> <td>358</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5055.65 | 52.97 | 74.00 | -21.03 | 38.60 | 34.89 | 11.14 | 31.66 | 397 | 358 | PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5310.00</td> <td>100.90</td> <td>-----</td> <td>-----</td> <td>87.07</td> <td>34.84</td> <td>10.97</td> <td>31.98</td> <td>397</td> <td>358</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5310.00 | 100.90 | ----- | ----- | 87.07 | 34.84 | 10.97 | 31.98 | 397 | 358 | PEAK |
| | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5055.65 | 52.97 | 74.00 | -21.03 | 38.60 | 34.89 | 11.14 | 31.66 | 397 | 358 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5310.00 | 100.90 | ----- | ----- | 87.07 | 34.84 | 10.97 | 31.98 | 397 | 358 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5127.60</td> <td>43.81</td> <td>54.00</td> <td>-10.19</td> <td>29.59</td> <td>34.87</td> <td>11.10</td> <td>31.75</td> <td>397</td> <td>358</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5127.60 | 43.81 | 54.00 | -10.19 | 29.59 | 34.87 | 11.10 | 31.75 | 397 | 358 | AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5310.00</td> <td>94.14</td> <td>-----</td> <td>-----</td> <td>80.29</td> <td>34.84</td> <td>10.98</td> <td>31.97</td> <td>397</td> <td>358</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5310.00 | 94.14 | ----- | ----- | 80.29 | 34.84 | 10.98 | 31.97 | 397 | 358 | AVERAGE |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5127.60 | 43.81 | 54.00 | -10.19 | 29.59 | 34.87 | 11.10 | 31.75 | 397 | 358 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5310.00 | 94.14 | ----- | ----- | 80.29 | 34.84 | 10.98 | 31.97 | 397 | 358 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 16 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|--------|-------|--------|-------|--------|--------|-------------|--------|------|-------|------|------|-------|--------|------|--------|--|-----|--------|--------|----|------|------|----|----|----|-----|-----------|-------|-------|--------|-------|-------|-------|-------|-----|-------------|-------|
| | Band Edge - R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2A_5.25-5.35_802.11n HT40_CH62_5310MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <p>Date: 2024-06-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5351.63</td> <td>56.25</td> <td>74.00</td> <td>-17.75</td> <td>42.51</td> <td>34.83</td> <td>10.94</td> <td>32.03</td> <td>397</td> <td>358 PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5351.63 | 56.25 | 74.00 | -17.75 | 42.51 | 34.83 | 10.94 | 32.03 | 397 | 358 PEAK | Blank |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5351.63 | 56.25 | 74.00 | -17.75 | 42.51 | 34.83 | 10.94 | 32.03 | 397 | 358 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <p>Date: 2024-06-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5350.01</td> <td>47.29</td> <td>54.00</td> <td>-6.71</td> <td>33.55</td> <td>34.83</td> <td>10.94</td> <td>32.03</td> <td>397</td> <td>358 AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 5350.01 | 47.29 | 54.00 | -6.71 | 33.55 | 34.83 | 10.94 | 32.03 | 397 | 358 AVERAGE | Blank |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5350.01 | 47.29 | 54.00 | -6.71 | 33.55 | 34.83 | 10.94 | 32.03 | 397 | 358 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 17 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|-------|--------|--------|--------|---------|--------|--------|----------------------|--------------|-------------|--|--|--|--|--|-------------------|------|------|----|----|----|-----|--|------------------------------|-------|-------|-------|-------|-----|----|---------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|-------|-------|-------|--------|------|------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|--------------|-------------|-------|--------|------|------|--------|----------------------|--------------|-------------|----|----|----|-----|--|------------------------|-------|-------|-------|-------|-----|-----|---------|------------------------|-------|-------|-------|-------|-----|----|------|
| | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5457.79 55.38 74.00 -18.62</td> <td>41.62</td> <td>34.81</td> <td>11.11</td> <td>32.16</td> <td>379</td> <td>74</td> <td>PEAK</td> </tr> <tr> <td>2 5469.04 64.92 68.30 -3.38</td> <td>51.13</td> <td>34.81</td> <td>11.16</td> <td>32.18</td> <td>379</td> <td>74</td> <td>PEAK</td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq Level Line (dB) | Level Factor | Loss Factor | | | | | | MHz dBuV/m dBuV/m | dBuV | dB/m | dB | dB | cm | deg | | 1 5457.79 55.38 74.00 -18.62 | 41.62 | 34.81 | 11.11 | 32.16 | 379 | 74 | PEAK | 2 5469.04 64.92 68.30 -3.38 | 51.13 | 34.81 | 11.16 | 32.18 | 379 | 74 | PEAK | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5500.00 110.27 -----</td> <td>96.41</td> <td>34.80</td> <td>11.27</td> <td>32.21</td> <td>379</td> <td>74</td> <td>PEAK</td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq Level Line (dB) | Level Factor | Loss Factor | | | | | | MHz dBuV/m dBuV/m | dBuV | dB/m | dB | dB | cm | deg | | 1 5500.00 110.27 ----- | 96.41 | 34.80 | 11.27 | 32.21 | 379 | 74 | PEAK |
| | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz dBuV/m dBuV/m | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5457.79 55.38 74.00 -18.62 | 41.62 | 34.81 | 11.11 | 32.16 | 379 | 74 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 5469.04 64.92 68.30 -3.38 | 51.13 | 34.81 | 11.16 | 32.18 | 379 | 74 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz dBuV/m dBuV/m | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5500.00 110.27 ----- | 96.41 | 34.80 | 11.27 | 32.21 | 379 | 74 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5459.89 44.10 54.00 -9.90</td> <td>30.34</td> <td>34.81</td> <td>11.12</td> <td>32.17</td> <td>379</td> <td>74</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq Level Line (dB) | Level Factor | Loss Factor | | | | | | MHz dBuV/m dBuV/m | dBuV | dB/m | dB | dB | cm | deg | | 1 5459.89 44.10 54.00 -9.90 | 30.34 | 34.81 | 11.12 | 32.17 | 379 | 74 | AVERAGE | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5500.00 102.89 -----</td> <td>89.03</td> <td>34.80</td> <td>11.27</td> <td>32.21</td> <td>379</td> <td>74</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq Level Line (dB) | Level Factor | Loss Factor | | | | | | MHz dBuV/m dBuV/m | dBuV | dB/m | dB | dB | cm | deg | | 1 5500.00 102.89 ----- | 89.03 | 34.80 | 11.27 | 32.21 | 379 | 74 | AVERAGE | | | | | | | | |
| Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz dBuV/m dBuV/m | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5459.89 44.10 54.00 -9.90 | 30.34 | 34.81 | 11.12 | 32.17 | 379 | 74 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz dBuV/m dBuV/m | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5500.00 102.89 ----- | 89.03 | 34.80 | 11.27 | 32.21 | 379 | 74 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 17 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|-------|--------|--------|--------|---------|--------|--------|----------------------|--------------|-------------|--|--|----|-----|--|------------------------------|-------|-------|-------|-------|-----|-----|---------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|-------|-------|-------|--------|------|------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|--------------|-------------|-------|--------|------|------|--------|----------------------|--------------|-------------|-------|-------|-----|-----|---------|------------------|-------|-------|-------|-------|-----|-----|------|
| | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5410.68 51.99 74.00 -22.01</td> <td>38.35</td> <td>34.82</td> <td>10.92</td> <td>32.10</td> <td>387</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2 5469.18 59.05 68.30 -9.25</td> <td>45.26</td> <td>34.81</td> <td>11.16</td> <td>32.18</td> <td>387</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | 1 5410.68 51.99 74.00 -22.01 | 38.35 | 34.82 | 10.92 | 32.10 | 387 | 360 | PEAK | 2 5469.18 59.05 68.30 -9.25 | 45.26 | 34.81 | 11.16 | 32.18 | 387 | 360 | PEAK | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5500.00 104.59</td> <td>90.73</td> <td>34.80</td> <td>11.27</td> <td>32.21</td> <td>387</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | 1 5500.00 104.59 | 90.73 | 34.80 | 11.27 | 32.21 | 387 | 360 | PEAK |
| | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5410.68 51.99 74.00 -22.01 | 38.35 | 34.82 | 10.92 | 32.10 | 387 | 360 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 5469.18 59.05 68.30 -9.25 | 45.26 | 34.81 | 11.16 | 32.18 | 387 | 360 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5500.00 104.59 | 90.73 | 34.80 | 11.27 | 32.21 | 387 | 360 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5458.84 42.54 54.00 -11.46</td> <td>28.77</td> <td>34.81</td> <td>11.12</td> <td>32.16</td> <td>387</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | 1 5458.84 42.54 54.00 -11.46 | 28.77 | 34.81 | 11.12 | 32.16 | 387 | 360 | AVERAGE | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5500.00 97.96</td> <td>84.10</td> <td>34.80</td> <td>11.27</td> <td>32.21</td> <td>387</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | 1 5500.00 97.96 | 84.10 | 34.80 | 11.27 | 32.21 | 387 | 360 | AVERAGE | | | | | | | | |
| Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5458.84 42.54 54.00 -11.46 | 28.77 | 34.81 | 11.12 | 32.16 | 387 | 360 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5500.00 97.96 | 84.10 | 34.80 | 11.27 | 32.21 | 387 | 360 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 17 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|-------|--------|-------------|--------|--------|-------|--------|------|-------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|------|-----|-------|--------|------|------|--------|------|-------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | <p>Date: 2024-06-29</p> | <p>Date: 2024-06-29</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11000.00</td> <td>47.41</td> <td>74.00</td> <td>-26.59</td> <td>44.27</td> <td>39.40</td> <td>14.54</td> <td>50.80</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>16500.00</td> <td>49.18</td> <td>68.30</td> <td>-19.12</td> <td>41.22</td> <td>42.40</td> <td>17.36</td> <td>51.80</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 11000.00 | 47.41 | 74.00 | -26.59 | 44.27 | 39.40 | 14.54 | 50.80 | -- | -- | Peak | 2 | 16500.00 | 49.18 | 68.30 | -19.12 | 41.22 | 42.40 | 17.36 | 51.80 | -- | -- | Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11000.00</td> <td>47.91</td> <td>74.00</td> <td>-26.09</td> <td>44.77</td> <td>39.40</td> <td>14.54</td> <td>50.80</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>16500.00</td> <td>48.06</td> <td>68.30</td> <td>-20.24</td> <td>40.10</td> <td>42.40</td> <td>17.36</td> <td>51.80</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 11000.00 | 47.91 | 74.00 | -26.09 | 44.77 | 39.40 | 14.54 | 50.80 | -- | -- | Peak | 2 | 16500.00 | 48.06 | 68.30 | -20.24 | 40.10 | 42.40 | 17.36 | 51.80 | -- | -- |
| Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 11000.00 | 47.41 | 74.00 | -26.59 | 44.27 | 39.40 | 14.54 | 50.80 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 16500.00 | 49.18 | 68.30 | -19.12 | 41.22 | 42.40 | 17.36 | 51.80 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 11000.00 | 47.91 | 74.00 | -26.09 | 44.77 | 39.40 | 14.54 | 50.80 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 16500.00 | 48.06 | 68.30 | -20.24 | 40.10 | 42.40 | 17.36 | 51.80 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |






| Mode | 18 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|--------|--------|--------|--------|--------|-------|--------|------|-------|------|--------|-------|--------|------|--------|-----|--------|--------|----|------|------|----|----|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|------|-----|-------|--------|------|------|--------|------|-------|------|--------|-------|--------|------|--------|-----|--------|--------|----|------|------|----|----|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11a_CH116_5580MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | <p>Date: 2024-06-29</p> | <p>Date: 2024-06-29</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11160.00</td> <td>47.81</td> <td>74.00</td> <td>-26.19</td> <td>44.41</td> <td>39.53</td> <td>14.64</td> <td>50.77</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>16740.00</td> <td>48.55</td> <td>68.30</td> <td>-19.75</td> <td>40.42</td> <td>42.45</td> <td>17.43</td> <td>51.75</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 11160.00 | 47.81 | 74.00 | -26.19 | 44.41 | 39.53 | 14.64 | 50.77 | -- | -- | Peak | 2 | 16740.00 | 48.55 | 68.30 | -19.75 | 40.42 | 42.45 | 17.43 | 51.75 | -- | -- | Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11160.00</td> <td>47.88</td> <td>74.00</td> <td>-26.12</td> <td>44.48</td> <td>39.53</td> <td>14.64</td> <td>50.77</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>16740.00</td> <td>48.54</td> <td>68.30</td> <td>-19.76</td> <td>40.41</td> <td>42.45</td> <td>17.43</td> <td>51.75</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | Freq | Level | Line | Margin | Level | Factor | Loss | Factor | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 11160.00 | 47.88 | 74.00 | -26.12 | 44.48 | 39.53 | 14.64 | 50.77 | -- | -- | Peak | 2 | 16740.00 | 48.54 | 68.30 | -19.76 | 40.41 | 42.45 | 17.43 | 51.75 | -- | -- |
| Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 11160.00 | 47.81 | 74.00 | -26.19 | 44.41 | 39.53 | 14.64 | 50.77 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 16740.00 | 48.55 | 68.30 | -19.75 | 40.42 | 42.45 | 17.43 | 51.75 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Margin | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 11160.00 | 47.88 | 74.00 | -26.12 | 44.48 | 39.53 | 14.64 | 50.77 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 16740.00 | 48.54 | 68.30 | -19.76 | 40.41 | 42.45 | 17.43 | 51.75 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 19 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|--------|--------|--------|--------|--------|------------|--------|--------|-------|-------|------|-------|--------|--------|--------|--------|-----|--------|--------|--------|------|------|------|----|----|-----|-----|---------|---------|-------|-------|-------|-------|-------|-------|---------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|--------|------|-----|-------|--------|------|------|--------|------|-------|------|------|-------|--------|------|--------|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|--------|-------|-------|-------|-------|-------|-----|---------|
| | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <p>Date: 2024-06-28</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5725.12</td> <td>68.30</td> <td>-4.37</td> <td>49.55</td> <td>35.12</td> <td>11.65</td> <td>32.39</td> <td>383</td> <td>73 PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5725.12 | 68.30 | -4.37 | 49.55 | 35.12 | 11.65 | 32.39 | 383 | 73 PEAK | <p>Date: 2024-06-28</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>106.43</td> <td>-----</td> <td>92.06</td> <td>35.08</td> <td>11.66</td> <td>32.37</td> <td>383</td> <td>73 PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5700.00 | 106.43 | ----- | 92.06 | 35.08 | 11.66 | 32.37 | 383 | 73 PEAK |
| | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5725.12 | 68.30 | -4.37 | 49.55 | 35.12 | 11.65 | 32.39 | 383 | 73 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5700.00 | 106.43 | ----- | 92.06 | 35.08 | 11.66 | 32.37 | 383 | 73 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | Blank | <p>Date: 2024-06-28</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>99.94</td> <td>-----</td> <td>85.56</td> <td>35.07</td> <td>11.67</td> <td>32.36</td> <td>383</td> <td>73 AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5700.00 | 99.94 | ----- | 85.56 | 35.07 | 11.67 | 32.36 | 383 | 73 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5700.00 | 99.94 | ----- | 85.56 | 35.07 | 11.67 | 32.36 | 383 | 73 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |


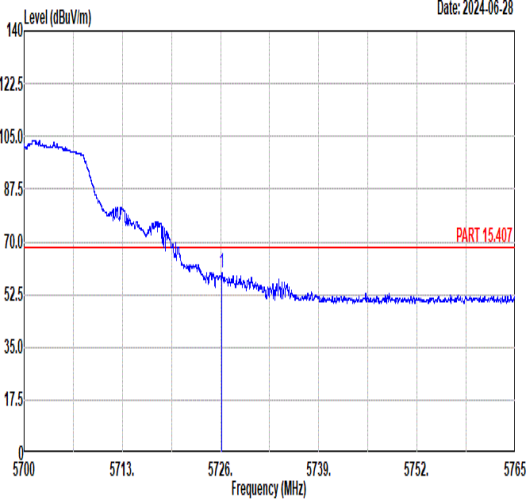
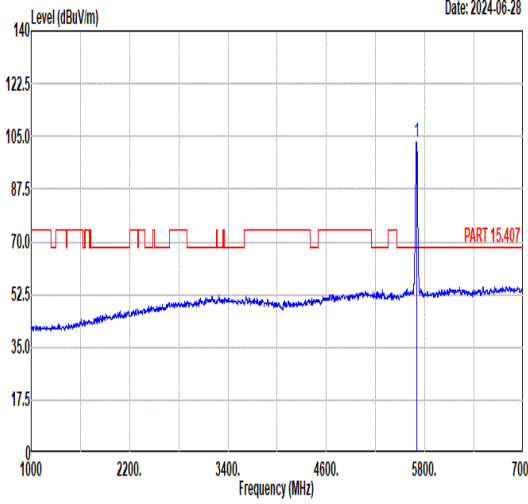
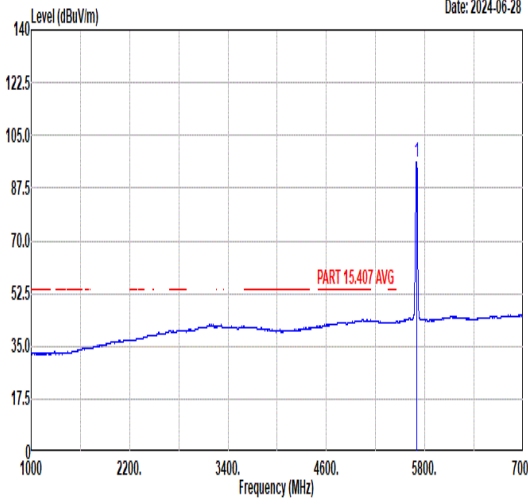


| Mode | 19 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|--------|--------|--------|--------|--------|--------|--------|---------|-------|-------|------|-------|--------|--------|--------|--------|-----|--------|--------|--------|------|------|------|----|----|-----|-----|---------|---------|-------|-------|-------|-------|-------|-------|-------|-----|------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|--------|------|-----|-------|--------|------|------|--------|------|-------|------|------|-------|--------|------|--------|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|--------|-------|-------|-------|-------|-------|-------|-----|-----|------|
| | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak |  <p>Date: 2024-06-28</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5726.16</td> <td>59.93</td> <td>68.30</td> <td>-8.37</td> <td>45.55</td> <td>35.12</td> <td>11.65</td> <td>32.39</td> <td>346</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5726.16 | 59.93 | 68.30 | -8.37 | 45.55 | 35.12 | 11.65 | 32.39 | 346 | 360 | PEAK |  <p>Date: 2024-06-28</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>103.26</td> <td>-----</td> <td>-----</td> <td>88.89</td> <td>35.08</td> <td>11.66</td> <td>32.37</td> <td>346</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5700.00 | 103.26 | ----- | ----- | 88.89 | 35.08 | 11.66 | 32.37 | 346 | 360 | PEAK |
| | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5726.16 | 59.93 | 68.30 | -8.37 | 45.55 | 35.12 | 11.65 | 32.39 | 346 | 360 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5700.00 | 103.26 | ----- | ----- | 88.89 | 35.08 | 11.66 | 32.37 | 346 | 360 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | Blank |  <p>Date: 2024-06-28</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>96.32</td> <td>-----</td> <td>-----</td> <td>81.95</td> <td>35.08</td> <td>11.66</td> <td>32.37</td> <td>346</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5700.00 | 96.32 | ----- | ----- | 81.95 | 35.08 | 11.66 | 32.37 | 346 | 360 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5700.00 | 96.32 | ----- | ----- | 81.95 | 35.08 | 11.66 | 32.37 | 346 | 360 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |







| Mode | 19 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|--------|--------|-------------|--------|--------|------------|--------|------|-------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|------------|-------|-------|--------|-------|-------|-------|-------|------------|------------|-------|-------|--------|-------|-------|-------|-------|------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|------|-----|-------|--------|------|------|--------|------|-------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|------------|-------|-------|--------|-------|-------|-------|-------|------------|------------|-------|-------|--------|-------|-------|-------|-------|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 11400.00</td> <td>47.83</td> <td>74.00</td> <td>-26.17</td> <td>44.05</td> <td>39.72</td> <td>14.78</td> <td>50.72</td> <td>-- -- Peak</td> </tr> <tr> <td>2 17100.00</td> <td>49.22</td> <td>68.30</td> <td>-19.08</td> <td>41.03</td> <td>42.46</td> <td>17.53</td> <td>51.80</td> <td>-- -- Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 11400.00 | 47.83 | 74.00 | -26.17 | 44.05 | 39.72 | 14.78 | 50.72 | -- -- Peak | 2 17100.00 | 49.22 | 68.30 | -19.08 | 41.03 | 42.46 | 17.53 | 51.80 | -- -- Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 11400.00</td> <td>48.42</td> <td>74.00</td> <td>-25.58</td> <td>44.64</td> <td>39.72</td> <td>14.78</td> <td>50.72</td> <td>-- -- Peak</td> </tr> <tr> <td>2 17100.00</td> <td>48.32</td> <td>68.30</td> <td>-19.98</td> <td>40.13</td> <td>42.46</td> <td>17.53</td> <td>51.80</td> <td>-- -- Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 11400.00 | 48.42 | 74.00 | -25.58 | 44.64 | 39.72 | 14.78 | 50.72 | -- -- Peak | 2 17100.00 | 48.32 | 68.30 | -19.98 | 40.13 | 42.46 | 17.53 | 51.80 |
| Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 11400.00 | 47.83 | 74.00 | -26.17 | 44.05 | 39.72 | 14.78 | 50.72 | -- -- Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 17100.00 | 49.22 | 68.30 | -19.08 | 41.03 | 42.46 | 17.53 | 51.80 | -- -- Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 11400.00 | 48.42 | 74.00 | -25.58 | 44.64 | 39.72 | 14.78 | 50.72 | -- -- Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 17100.00 | 48.32 | 68.30 | -19.98 | 40.13 | 42.46 | 17.53 | 51.80 | -- -- Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

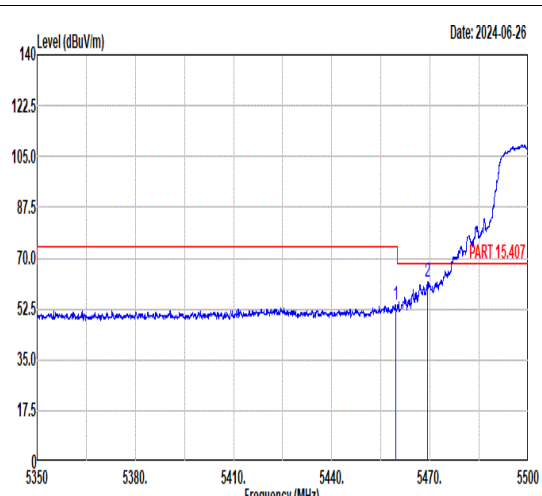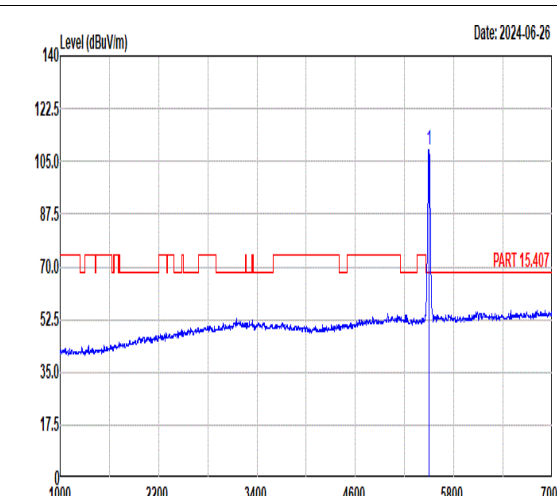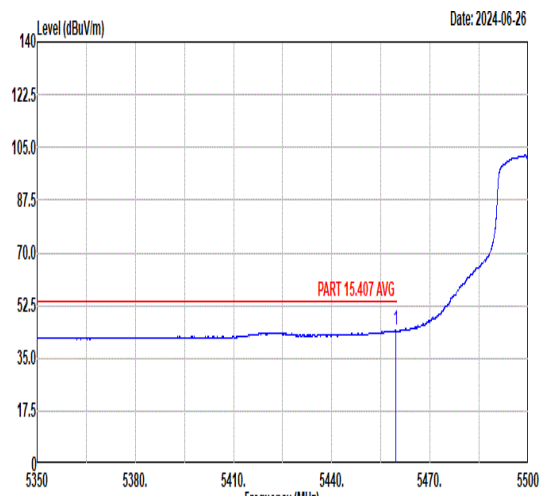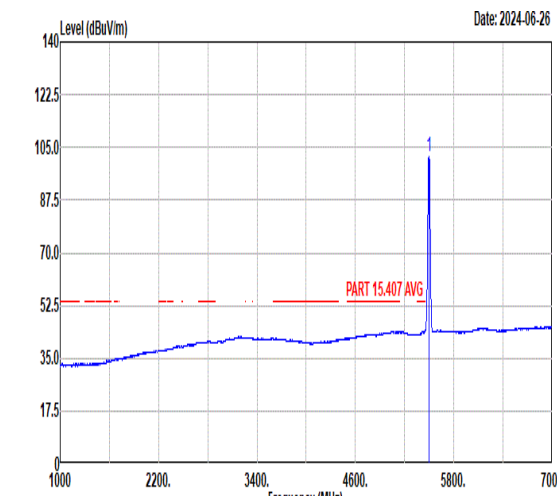

| Mode | 20 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|--------|--------|--------|--------|--------|--------|--------|--------|---------|-------|------|------|-------|--------|------|--------|--|-----|--------|--------|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|----|---------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|--------|-------|-------|-------|--------|-------|-------|--------|------|-------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|--------|--------|------|--------|--------|------|--------|--------|------|-------|------|------|-------|--------|------|---------|--------|-------|--------|--------|-------|-------|-------|-----|----|---------|---|---------|--------|-------|-------|-------|-------|-------|-------|-----|----|------|
| | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11n HT20_CH100_5500MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak |  <p style="text-align: right;">Date: 2024-06-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.43</td> <td>53.91</td> <td>74.00</td> <td>-20.09</td> <td>40.14</td> <td>34.81</td> <td>11.12</td> <td>32.16</td> <td>382</td> <td>72</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5469.34</td> <td>61.91</td> <td>68.30</td> <td>-6.39</td> <td>48.12</td> <td>34.81</td> <td>11.16</td> <td>32.18</td> <td>382</td> <td>72</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5459.43 | 53.91 | 74.00 | -20.09 | 40.14 | 34.81 | 11.12 | 32.16 | 382 | 72 | PEAK | 2 | 5469.34 | 61.91 | 68.30 | -6.39 | 48.12 | 34.81 | 11.16 | 32.18 | 382 | 72 | PEAK |  <p style="text-align: right;">Date: 2024-06-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>108.66</td> <td>-----</td> <td>-----</td> <td>94.80</td> <td>34.80</td> <td>11.27</td> <td>32.21</td> <td>382</td> <td>72</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5500.00 | 108.66 | ----- | ----- | 94.80 | 34.80 | 11.27 | 32.21 | 382 | 72 | PEAK |
| | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5459.43 | 53.91 | 74.00 | -20.09 | 40.14 | 34.81 | 11.12 | 32.16 | 382 | 72 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 5469.34 | 61.91 | 68.30 | -6.39 | 48.12 | 34.81 | 11.16 | 32.18 | 382 | 72 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5500.00 | 108.66 | ----- | ----- | 94.80 | 34.80 | 11.27 | 32.21 | 382 | 72 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg |  <p style="text-align: right;">Date: 2024-06-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.43</td> <td>44.19</td> <td>54.00</td> <td>-9.81</td> <td>30.42</td> <td>34.81</td> <td>11.12</td> <td>32.16</td> <td>382</td> <td>72</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5459.43 | 44.19 | 54.00 | -9.81 | 30.42 | 34.81 | 11.12 | 32.16 | 382 | 72 | AVERAGE |  <p style="text-align: right;">Date: 2024-06-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>102.17</td> <td>-----</td> <td>-----</td> <td>88.31</td> <td>34.80</td> <td>11.27</td> <td>32.21</td> <td>382</td> <td>72</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5500.00 | 102.17 | ----- | ----- | 88.31 | 34.80 | 11.27 | 32.21 | 382 | 72 | AVERAGE | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5459.43 | 44.19 | 54.00 | -9.81 | 30.42 | 34.81 | 11.12 | 32.16 | 382 | 72 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5500.00 | 102.17 | ----- | ----- | 88.31 | 34.80 | 11.27 | 32.21 | 382 | 72 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

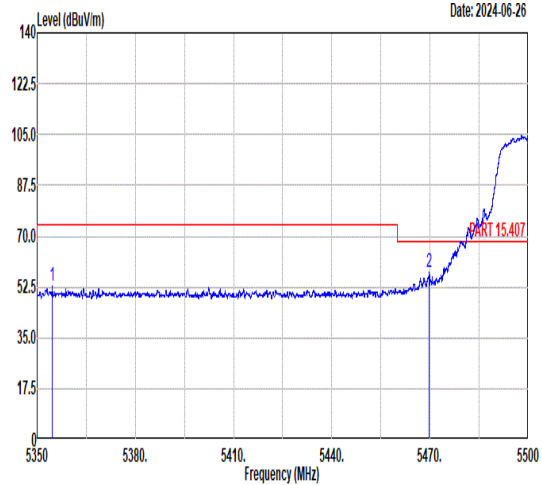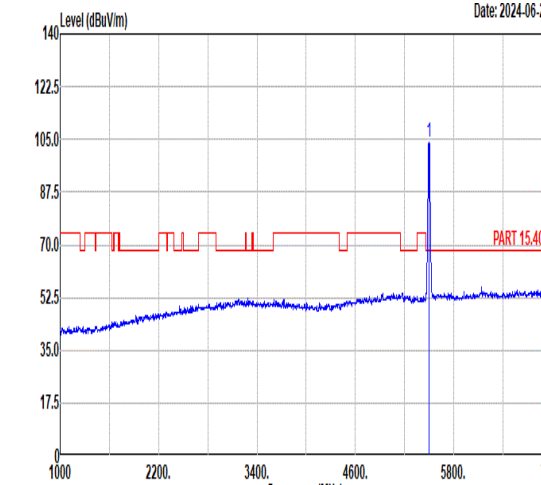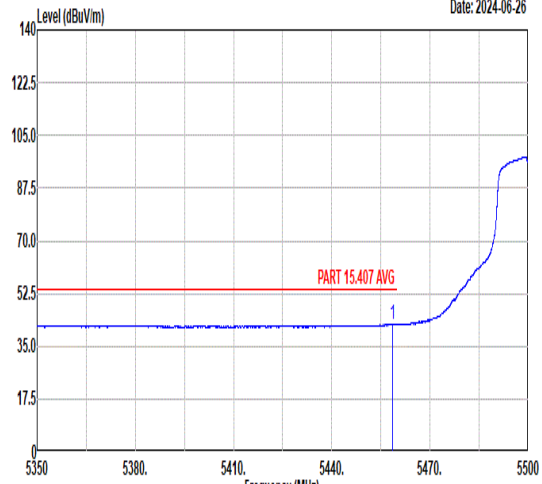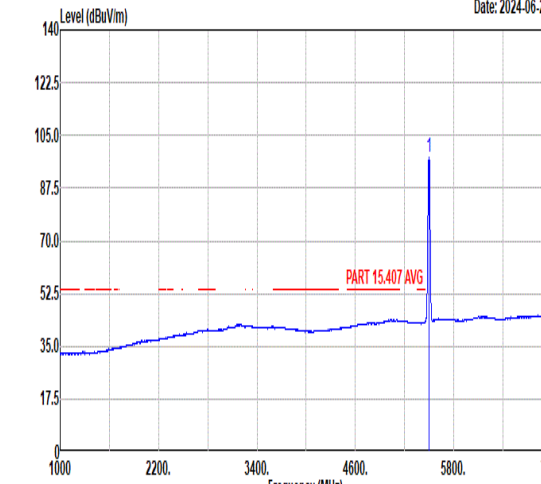

| Mode | 20 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|--------|--------|--------|--------|--------|--------|--------|-----------|------|-------|------|------|-------|--------|------|--------|--|-----|--------|--------|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|--------|-------|--------|-------|--------|-------|-------|--------|--------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|--------|-------|--------|-------|--------|------|------|--------|--------|-------|------|------|-------|--------|------|--------|---------|-------|--------|--------|-------|-------|-------|-------|-----|-----------|---|---------|--------|-------|-------|-------|-------|-------|-------|-----|--------|
| | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11n HT20_CH100_5500MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak |  <p style="text-align: right;">Date: 2024-06-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5354.59</td> <td>52.64</td> <td>74.00</td> <td>-21.36</td> <td>38.90</td> <td>34.83</td> <td>10.94</td> <td>32.03</td> <td>390</td> <td>0 PEAK</td> </tr> <tr> <td>2</td> <td>5469.79</td> <td>57.77</td> <td>68.30</td> <td>-10.53</td> <td>43.98</td> <td>34.81</td> <td>11.16</td> <td>32.18</td> <td>390</td> <td>0 PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5354.59 | 52.64 | 74.00 | -21.36 | 38.90 | 34.83 | 10.94 | 32.03 | 390 | 0 PEAK | 2 | 5469.79 | 57.77 | 68.30 | -10.53 | 43.98 | 34.81 | 11.16 | 32.18 | 390 | 0 PEAK |  <p style="text-align: right;">Date: 2024-06-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>104.16</td> <td>-----</td> <td>-----</td> <td>90.30</td> <td>34.80</td> <td>11.27</td> <td>32.21</td> <td>390</td> <td>0 PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5500.00 | 104.16 | ----- | ----- | 90.30 | 34.80 | 11.27 | 32.21 | 390 | 0 PEAK |
| | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5354.59 | 52.64 | 74.00 | -21.36 | 38.90 | 34.83 | 10.94 | 32.03 | 390 | 0 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 5469.79 | 57.77 | 68.30 | -10.53 | 43.98 | 34.81 | 11.16 | 32.18 | 390 | 0 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5500.00 | 104.16 | ----- | ----- | 90.30 | 34.80 | 11.27 | 32.21 | 390 | 0 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg |  <p style="text-align: right;">Date: 2024-06-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5458.54</td> <td>42.36</td> <td>54.00</td> <td>-11.64</td> <td>28.60</td> <td>34.81</td> <td>11.11</td> <td>32.16</td> <td>390</td> <td>0 AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5458.54 | 42.36 | 54.00 | -11.64 | 28.60 | 34.81 | 11.11 | 32.16 | 390 | 0 AVERAGE |  <p style="text-align: right;">Date: 2024-06-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>97.51</td> <td>-----</td> <td>-----</td> <td>83.65</td> <td>34.80</td> <td>11.27</td> <td>32.21</td> <td>390</td> <td>0 AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5500.00 | 97.51 | ----- | ----- | 83.65 | 34.80 | 11.27 | 32.21 | 390 | 0 AVERAGE | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5458.54 | 42.36 | 54.00 | -11.64 | 28.60 | 34.81 | 11.11 | 32.16 | 390 | 0 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5500.00 | 97.51 | ----- | ----- | 83.65 | 34.80 | 11.27 | 32.21 | 390 | 0 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 20 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|-------|--------|-------------|--------|--------|-------|--------|------|-------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|------|-----|-------|--------|------|------|--------|------|-------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11n HT20_CH100_5500MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | <p>Date: 2024-06-29</p> | <p>Date: 2024-06-29</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11000.00</td> <td>47.77</td> <td>74.00</td> <td>-26.23</td> <td>44.63</td> <td>39.40</td> <td>14.54</td> <td>50.80</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>16500.00</td> <td>49.10</td> <td>68.30</td> <td>-19.20</td> <td>41.14</td> <td>42.40</td> <td>17.36</td> <td>51.80</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 11000.00 | 47.77 | 74.00 | -26.23 | 44.63 | 39.40 | 14.54 | 50.80 | -- | -- | Peak | 2 | 16500.00 | 49.10 | 68.30 | -19.20 | 41.14 | 42.40 | 17.36 | 51.80 | -- | -- | Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11000.00</td> <td>47.97</td> <td>74.00</td> <td>-26.03</td> <td>44.83</td> <td>39.40</td> <td>14.54</td> <td>50.80</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>16500.00</td> <td>48.72</td> <td>68.30</td> <td>-19.58</td> <td>40.76</td> <td>42.40</td> <td>17.36</td> <td>51.80</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 11000.00 | 47.97 | 74.00 | -26.03 | 44.83 | 39.40 | 14.54 | 50.80 | -- | -- | Peak | 2 | 16500.00 | 48.72 | 68.30 | -19.58 | 40.76 | 42.40 | 17.36 | 51.80 | -- | -- |
| Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 11000.00 | 47.77 | 74.00 | -26.23 | 44.63 | 39.40 | 14.54 | 50.80 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 16500.00 | 49.10 | 68.30 | -19.20 | 41.14 | 42.40 | 17.36 | 51.80 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 11000.00 | 47.97 | 74.00 | -26.03 | 44.83 | 39.40 | 14.54 | 50.80 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 16500.00 | 48.72 | 68.30 | -19.58 | 40.76 | 42.40 | 17.36 | 51.80 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 21 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|-------|--------|-------------|--------|--------|-------|--------|------|-------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|------|-----|-------|--------|------|------|--------|------|-------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11n HT20_CH116_5580MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | <p>Date: 2024-06-29</p> | <p>Date: 2024-06-29</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11160.00</td> <td>48.19</td> <td>74.00</td> <td>-25.81</td> <td>44.79</td> <td>39.53</td> <td>14.64</td> <td>50.77</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>16740.00</td> <td>48.92</td> <td>68.30</td> <td>-19.38</td> <td>40.79</td> <td>42.45</td> <td>17.43</td> <td>51.75</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 11160.00 | 48.19 | 74.00 | -25.81 | 44.79 | 39.53 | 14.64 | 50.77 | -- | -- | Peak | 2 | 16740.00 | 48.92 | 68.30 | -19.38 | 40.79 | 42.45 | 17.43 | 51.75 | -- | -- | Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11160.00</td> <td>48.10</td> <td>74.00</td> <td>-25.90</td> <td>44.70</td> <td>39.53</td> <td>14.64</td> <td>50.77</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>16740.00</td> <td>48.44</td> <td>68.30</td> <td>-19.86</td> <td>40.31</td> <td>42.45</td> <td>17.43</td> <td>51.75</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 11160.00 | 48.10 | 74.00 | -25.90 | 44.70 | 39.53 | 14.64 | 50.77 | -- | -- | Peak | 2 | 16740.00 | 48.44 | 68.30 | -19.86 | 40.31 | 42.45 | 17.43 | 51.75 | -- | -- |
| Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 11160.00 | 48.19 | 74.00 | -25.81 | 44.79 | 39.53 | 14.64 | 50.77 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 16740.00 | 48.92 | 68.30 | -19.38 | 40.79 | 42.45 | 17.43 | 51.75 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 11160.00 | 48.10 | 74.00 | -25.90 | 44.70 | 39.53 | 14.64 | 50.77 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 16740.00 | 48.44 | 68.30 | -19.86 | 40.31 | 42.45 | 17.43 | 51.75 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 22 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|--------|--------|--------|--------|--------|--------|------------|--------|-------|-------|------|-------|--------|--------|--------|--------|-----|--------|--------|--------|------|------|------|----|----|-----|-----|---------|---------|--------|-------|-------|-------|-------|-------|-------|---------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|--------|------|-----|-------|--------|------|------|--------|------|-------|------|------|-------|--------|------|--------|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|--------|-------|-------|-------|-------|-------|-------|-----|---------|
| | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11n HT20_CH140_5700MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5729.81</td> <td>62.96</td> <td>68.30</td> <td>-5.34</td> <td>48.58</td> <td>35.12</td> <td>11.65</td> <td>32.39</td> <td>382</td> <td>75 PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5729.81 | 62.96 | 68.30 | -5.34 | 48.58 | 35.12 | 11.65 | 32.39 | 382 | 75 PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>106.35</td> <td>-----</td> <td>-----</td> <td>91.98</td> <td>35.08</td> <td>11.66</td> <td>32.37</td> <td>382</td> <td>75 PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5700.00 | 106.35 | ----- | ----- | 91.98 | 35.08 | 11.66 | 32.37 | 382 | 75 PEAK |
| | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5729.81 | 62.96 | 68.30 | -5.34 | 48.58 | 35.12 | 11.65 | 32.39 | 382 | 75 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5700.00 | 106.35 | ----- | ----- | 91.98 | 35.08 | 11.66 | 32.37 | 382 | 75 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | Blank | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>100.04</td> <td>-----</td> <td>-----</td> <td>85.66</td> <td>35.07</td> <td>11.67</td> <td>32.36</td> <td>382</td> <td>75 AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5700.00 | 100.04 | ----- | ----- | 85.66 | 35.07 | 11.67 | 32.36 | 382 | 75 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5700.00 | 100.04 | ----- | ----- | 85.66 | 35.07 | 11.67 | 32.36 | 382 | 75 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 22 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|--------|--------|--------|--------|--------|--------|-----------|--------|-------|-------|------|-------|--------|--------|--------|--------|-----|--------|--------|--------|------|------|------|----|----|-----|-----|---------|---------|-------|-------|-------|-------|-------|-------|-------|--------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|--------|------|-----|-------|--------|------|------|--------|------|-------|------|------|-------|--------|------|--------|--|-----|--------|--------|----|------|------|----|----|----|-----|---|---------|--------|-------|-------|-------|-------|-------|-------|-----|--------|
| | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11n HT20_CH140_5700MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5727.33</td> <td>60.65</td> <td>68.30</td> <td>-7.65</td> <td>46.27</td> <td>35.12</td> <td>11.65</td> <td>32.39</td> <td>368</td> <td>0 PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5727.33 | 60.65 | 68.30 | -7.65 | 46.27 | 35.12 | 11.65 | 32.39 | 368 | 0 PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>102.36</td> <td>-----</td> <td>-----</td> <td>87.98</td> <td>35.07</td> <td>11.67</td> <td>32.36</td> <td>368</td> <td>0 PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5700.00 | 102.36 | ----- | ----- | 87.98 | 35.07 | 11.67 | 32.36 | 368 | 0 PEAK |
| | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5727.33 | 60.65 | 68.30 | -7.65 | 46.27 | 35.12 | 11.65 | 32.39 | 368 | 0 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5700.00 | 102.36 | ----- | ----- | 87.98 | 35.07 | 11.67 | 32.36 | 368 | 0 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | Blank | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>96.06</td> <td>-----</td> <td>-----</td> <td>81.68</td> <td>35.07</td> <td>11.67</td> <td>32.36</td> <td>368</td> <td>0 AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | 1 | 5700.00 | 96.06 | ----- | ----- | 81.68 | 35.07 | 11.67 | 32.36 | 368 | 0 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5700.00 | 96.06 | ----- | ----- | 81.68 | 35.07 | 11.67 | 32.36 | 368 | 0 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 22 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|-------|--------|-------------|--------|--------|--------|--------|------|-------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|------|-----|-------|--------|------|------|--------|------|-------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11n HT20_CH140_5700MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11400.00</td> <td>47.56</td> <td>74.00</td> <td>-26.44</td> <td>43.78</td> <td>39.72</td> <td>14.78</td> <td>50.72</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17100.00</td> <td>48.87</td> <td>68.30</td> <td>-19.43</td> <td>40.68</td> <td>42.46</td> <td>17.53</td> <td>51.80</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 11400.00 | 47.56 | 74.00 | -26.44 | 43.78 | 39.72 | 14.78 | 50.72 | -- | -- | Peak | 2 | 17100.00 | 48.87 | 68.30 | -19.43 | 40.68 | 42.46 | 17.53 | 51.80 | -- | -- | Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11400.00</td> <td>47.68</td> <td>74.00</td> <td>-26.32</td> <td>43.90</td> <td>39.72</td> <td>14.78</td> <td>50.72</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17100.00</td> <td>48.62</td> <td>68.30</td> <td>-19.68</td> <td>40.43</td> <td>42.46</td> <td>17.53</td> <td>51.80</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 11400.00 | 47.68 | 74.00 | -26.32 | 43.90 | 39.72 | 14.78 | 50.72 | -- | -- | Peak | 2 | 17100.00 | 48.62 | 68.30 | -19.68 | 40.43 | 42.46 | 17.53 | 51.80 | -- | -- | Peak |
| | Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 11400.00 | 47.56 | 74.00 | -26.44 | 43.78 | 39.72 | 14.78 | 50.72 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 17100.00 | 48.87 | 68.30 | -19.43 | 40.68 | 42.46 | 17.53 | 51.80 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 11400.00 | 47.68 | 74.00 | -26.32 | 43.90 | 39.72 | 14.78 | 50.72 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 17100.00 | 48.62 | 68.30 | -19.68 | 40.43 | 42.46 | 17.53 | 51.80 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |







| Mode | 23 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|-------|--------|--------|--------|---------|--------|--------|----------------------|--------------|-------------|--|--|----|-----|--|------------------------------|-------|-------|-------|-------|-----|----|---------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|-------|-------|-------|--------|------|------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|--------------|-------------|-------|--------|------|------|--------|----------------------|--------------|-------------|-------|-------|-----|-----|---------|------------------|-------|-------|-------|-------|-----|----|------|
| | Band Edge - L | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11n HT40_CH102_5510MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5459.22 56.87 74.00 -17.13</td> <td>43.10</td> <td>34.81</td> <td>11.12</td> <td>32.16</td> <td>380</td> <td>71</td> <td>PEAK</td> </tr> <tr> <td>2 5469.30 64.18 68.30 -4.12</td> <td>50.39</td> <td>34.81</td> <td>11.16</td> <td>32.18</td> <td>380</td> <td>71</td> <td>PEAK</td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | 1 5459.22 56.87 74.00 -17.13 | 43.10 | 34.81 | 11.12 | 32.16 | 380 | 71 | PEAK | 2 5469.30 64.18 68.30 -4.12 | 50.39 | 34.81 | 11.16 | 32.18 | 380 | 71 | PEAK | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5510.00 103.11</td> <td>89.21</td> <td>34.81</td> <td>11.30</td> <td>32.21</td> <td>380</td> <td>71</td> <td>PEAK</td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | 1 5510.00 103.11 | 89.21 | 34.81 | 11.30 | 32.21 | 380 | 71 | PEAK |
| | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5459.22 56.87 74.00 -17.13 | 43.10 | 34.81 | 11.12 | 32.16 | 380 | 71 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 5469.30 64.18 68.30 -4.12 | 50.39 | 34.81 | 11.16 | 32.18 | 380 | 71 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5510.00 103.11 | 89.21 | 34.81 | 11.30 | 32.21 | 380 | 71 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5459.52 46.15 54.00 -7.85</td> <td>32.38</td> <td>34.81</td> <td>11.12</td> <td>32.16</td> <td>380</td> <td>71</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | 1 5459.52 46.15 54.00 -7.85 | 32.38 | 34.81 | 11.12 | 32.16 | 380 | 71 | AVERAGE | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5510.00 96.77</td> <td>82.87</td> <td>34.81</td> <td>11.30</td> <td>32.21</td> <td>380</td> <td>71</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | 1 5510.00 96.77 | 82.87 | 34.81 | 11.30 | 32.21 | 380 | 71 | AVERAGE | | | | | | | | |
| Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5459.52 46.15 54.00 -7.85 | 32.38 | 34.81 | 11.12 | 32.16 | 380 | 71 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5510.00 96.77 | 82.87 | 34.81 | 11.30 | 32.21 | 380 | 71 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 23 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|--------|--------|-------------|-------|--------|--------|------|---------|------|-------|------|-------|--------|-------------|----|----|-----|-----|--------|--------|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|---------|-------|
| | Band Edge - R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11n HT40_CH102_5510MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <p>Date: 2024-06-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5743.99</td> <td>53.14</td> <td>68.30</td> <td>-15.16</td> <td>38.76</td> <td>35.14</td> <td>11.64</td> <td>32.40</td> <td>380</td> <td>71 PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | Level | Factor | Loss Factor | dB | cm | deg | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5743.99 | 53.14 | 68.30 | -15.16 | 38.76 | 35.14 | 11.64 | 32.40 | 380 | 71 PEAK | Blank |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Level | Factor | Loss Factor | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5743.99 | 53.14 | 68.30 | -15.16 | 38.76 | 35.14 | 11.64 | 32.40 | 380 | 71 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

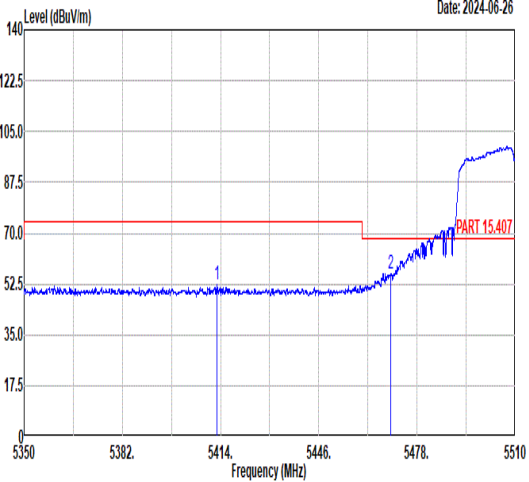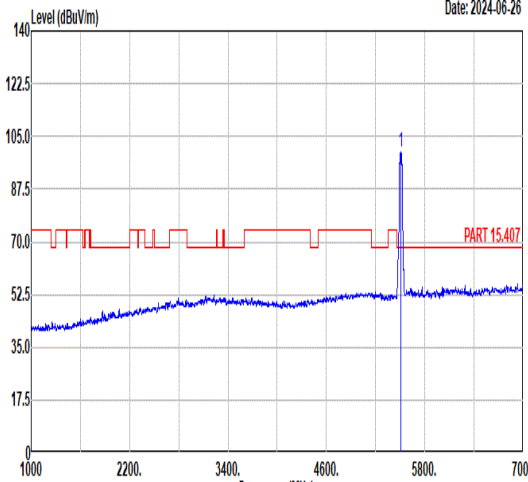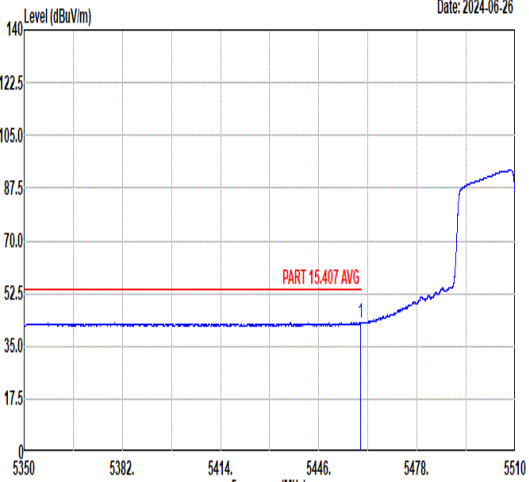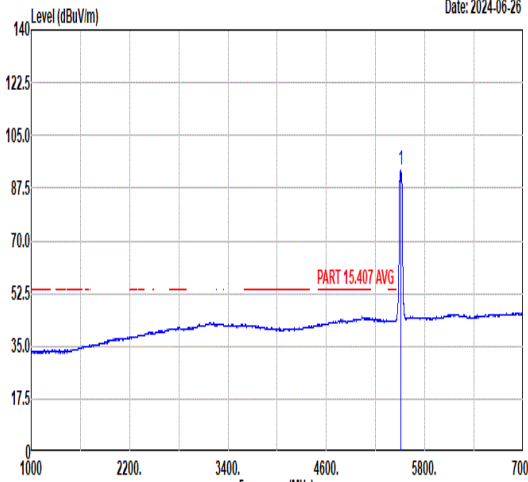

| Mode | 23 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|--------|--------|--------|--------|--------|--------|--------|-----------|------|-------|------|------|-------|--------|------|--------|--|-----|--------|--------|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|--------|-------|--------|-------|--------|-------|-------|--------|--------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|--------|-------|--------|-------|--------|------|------|--------|--------|-------|------|------|-------|--------|------|--------|---------|-------|--------|--------|-------|-------|-------|-------|-----|-----------|---|---------|-------|-------|-------|-------|-------|-------|-------|-----|--------|
| | Band Edge - L | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11n HT40_CH102_5510MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak |  <p>Date: 2024-06-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5412.80</td> <td>52.17</td> <td>74.00</td> <td>-21.83</td> <td>38.54</td> <td>34.82</td> <td>10.92</td> <td>32.11</td> <td>386</td> <td>0 PEAK</td> </tr> <tr> <td>2</td> <td>5469.46</td> <td>56.26</td> <td>68.30</td> <td>-12.04</td> <td>42.47</td> <td>34.81</td> <td>11.16</td> <td>32.18</td> <td>386</td> <td>0 PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5412.80 | 52.17 | 74.00 | -21.83 | 38.54 | 34.82 | 10.92 | 32.11 | 386 | 0 PEAK | 2 | 5469.46 | 56.26 | 68.30 | -12.04 | 42.47 | 34.81 | 11.16 | 32.18 | 386 | 0 PEAK |  <p>Date: 2024-06-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5510.00</td> <td>99.96</td> <td>-----</td> <td>-----</td> <td>86.05</td> <td>34.81</td> <td>11.32</td> <td>32.22</td> <td>386</td> <td>0 PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5510.00 | 99.96 | ----- | ----- | 86.05 | 34.81 | 11.32 | 32.22 | 386 | 0 PEAK |
| | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5412.80 | 52.17 | 74.00 | -21.83 | 38.54 | 34.82 | 10.92 | 32.11 | 386 | 0 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 5469.46 | 56.26 | 68.30 | -12.04 | 42.47 | 34.81 | 11.16 | 32.18 | 386 | 0 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5510.00 | 99.96 | ----- | ----- | 86.05 | 34.81 | 11.32 | 32.22 | 386 | 0 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg |  <p>Date: 2024-06-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.68</td> <td>42.83</td> <td>54.00</td> <td>-11.17</td> <td>29.06</td> <td>34.81</td> <td>11.12</td> <td>32.16</td> <td>386</td> <td>0 AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5459.68 | 42.83 | 54.00 | -11.17 | 29.06 | 34.81 | 11.12 | 32.16 | 386 | 0 AVERAGE |  <p>Date: 2024-06-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5510.00</td> <td>93.28</td> <td>-----</td> <td>-----</td> <td>79.38</td> <td>34.81</td> <td>11.30</td> <td>32.21</td> <td>386</td> <td>0 AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5510.00 | 93.28 | ----- | ----- | 79.38 | 34.81 | 11.30 | 32.21 | 386 | 0 AVERAGE | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5459.68 | 42.83 | 54.00 | -11.17 | 29.06 | 34.81 | 11.12 | 32.16 | 386 | 0 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5510.00 | 93.28 | ----- | ----- | 79.38 | 34.81 | 11.30 | 32.21 | 386 | 0 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 23 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|--------|--------|-------------|-------|--------|--------|------|--------|------|-------|------|-------|--------|-------------|--|--|--------|-----|--------|--------|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|--------|-------|
| | Band Edge - R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11n HT40_CH102_5510MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <p>Date: 2024-06-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5749.57</td> <td>52.55</td> <td>68.30</td> <td>-15.75</td> <td>38.17</td> <td>35.15</td> <td>11.64</td> <td>32.41</td> <td>386</td> <td>0 PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | Freq | Level | Line | Level | Factor | Loss Factor | | | Remark | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5749.57 | 52.55 | 68.30 | -15.75 | 38.17 | 35.15 | 11.64 | 32.41 | 386 | 0 PEAK | Blank |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Level | Factor | Loss Factor | | | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5749.57 | 52.55 | 68.30 | -15.75 | 38.17 | 35.15 | 11.64 | 32.41 | 386 | 0 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 24 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|-------|--------|-------------|--------|--------|-------|--------|------|-------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|------|-----|-------|--------|------|------|--------|------|-------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11n HT40_CH110_5550MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | <p>Date: 2024-07-02</p> | <p>Date: 2024-07-02</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11100.00</td> <td>47.05</td> <td>74.00</td> <td>-26.95</td> <td>43.75</td> <td>39.48</td> <td>14.60</td> <td>50.78</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>16650.00</td> <td>46.68</td> <td>68.30</td> <td>-21.62</td> <td>38.61</td> <td>42.43</td> <td>17.41</td> <td>51.77</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 11100.00 | 47.05 | 74.00 | -26.95 | 43.75 | 39.48 | 14.60 | 50.78 | -- | -- | Peak | 2 | 16650.00 | 46.68 | 68.30 | -21.62 | 38.61 | 42.43 | 17.41 | 51.77 | -- | -- | Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11100.00</td> <td>47.09</td> <td>74.00</td> <td>-26.91</td> <td>43.79</td> <td>39.48</td> <td>14.60</td> <td>50.78</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>16650.00</td> <td>47.19</td> <td>68.30</td> <td>-21.11</td> <td>39.12</td> <td>42.43</td> <td>17.41</td> <td>51.77</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 11100.00 | 47.09 | 74.00 | -26.91 | 43.79 | 39.48 | 14.60 | 50.78 | -- | -- | Peak | 2 | 16650.00 | 47.19 | 68.30 | -21.11 | 39.12 | 42.43 | 17.41 | 51.77 | -- | -- |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 11100.00 | 47.05 | 74.00 | -26.95 | 43.75 | 39.48 | 14.60 | 50.78 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 16650.00 | 46.68 | 68.30 | -21.62 | 38.61 | 42.43 | 17.41 | 51.77 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 11100.00 | 47.09 | 74.00 | -26.91 | 43.79 | 39.48 | 14.60 | 50.78 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 16650.00 | 47.19 | 68.30 | -21.11 | 39.12 | 42.43 | 17.41 | 51.77 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |







| Mode | 25 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|--------|--------|--------|--------|--------|--------|--------|--------|---------|-------|------|------|-------|--------|------|--------|--|-----|--------|--------|------|------|------|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|----|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|--------|-------|--------|-------|--------|-------|-------|--------|------|-------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|--------|--------|------|--------|--------|------|--------|--------|------|-------|------|------|-------|--------|------|---------|-------|-------|--------|--------|-------|-------|-------|-----|----|---------|---|---------|--------|-------|-------|-------|-------|-------|-------|-----|----|------|
| | Band Edge - L | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11n HT40_CH134_5670MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5426.00</td> <td>52.42</td> <td>74.00</td> <td>-21.58</td> <td>38.75</td> <td>34.81</td> <td>10.98</td> <td>32.12</td> <td>386</td> <td>76</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5466.96</td> <td>51.78</td> <td>68.30</td> <td>-16.52</td> <td>37.99</td> <td>34.81</td> <td>11.15</td> <td>32.17</td> <td>386</td> <td>76</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5426.00 | 52.42 | 74.00 | -21.58 | 38.75 | 34.81 | 10.98 | 32.12 | 386 | 76 | PEAK | 2 | 5466.96 | 51.78 | 68.30 | -16.52 | 37.99 | 34.81 | 11.15 | 32.17 | 386 | 76 | PEAK | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5670.00</td> <td>105.24</td> <td>-----</td> <td>-----</td> <td>90.86</td> <td>35.04</td> <td>11.68</td> <td>32.34</td> <td>386</td> <td>76</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | 1 | 5670.00 | 105.24 | ----- | ----- | 90.86 | 35.04 | 11.68 | 32.34 | 386 | 76 | PEAK |
| | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5426.00 | 52.42 | 74.00 | -21.58 | 38.75 | 34.81 | 10.98 | 32.12 | 386 | 76 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 5466.96 | 51.78 | 68.30 | -16.52 | 37.99 | 34.81 | 11.15 | 32.17 | 386 | 76 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5670.00 | 105.24 | ----- | ----- | 90.86 | 35.04 | 11.68 | 32.34 | 386 | 76 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5425.68</td> <td>44.29</td> <td>54.00</td> <td>-9.71</td> <td>30.62</td> <td>34.81</td> <td>10.98</td> <td>32.12</td> <td>386</td> <td>76</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | 1 | 5425.68 | 44.29 | 54.00 | -9.71 | 30.62 | 34.81 | 10.98 | 32.12 | 386 | 76 | AVERAGE | <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5670.00</td> <td>98.78</td> <td>-----</td> <td>-----</td> <td>84.40</td> <td>35.04</td> <td>11.68</td> <td>32.34</td> <td>386</td> <td>76</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | 1 | 5670.00 | 98.78 | ----- | ----- | 84.40 | 35.04 | 11.68 | 32.34 | 386 | 76 | AVERAGE | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5425.68 | 44.29 | 54.00 | -9.71 | 30.62 | 34.81 | 10.98 | 32.12 | 386 | 76 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5670.00 | 98.78 | ----- | ----- | 84.40 | 35.04 | 11.68 | 32.34 | 386 | 76 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 25 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|--------|--------|-------------|-------|--------|-------------|------|--------|------|-------|------|-------|--------|-------------|--|--|--|-----|--------|--------|------|------|----|----|----|-----|-----------|-------|-------|-------|-------|-------|-------|-------|-------------|-------|
| | Band Edge - R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11n HT40_CH134_5670MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <p>Date: 2024-06-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5726.57</td> <td>59.09</td> <td>68.30</td> <td>-9.21</td> <td>44.71</td> <td>35.12</td> <td>11.65</td> <td>32.39</td> <td>386 76 PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | Level | Factor | Loss Factor | | | | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 5726.57 | 59.09 | 68.30 | -9.21 | 44.71 | 35.12 | 11.65 | 32.39 | 386 76 PEAK | Blank |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5726.57 | 59.09 | 68.30 | -9.21 | 44.71 | 35.12 | 11.65 | 32.39 | 386 76 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

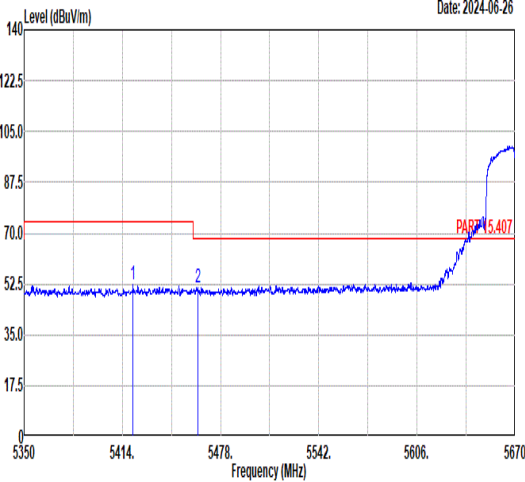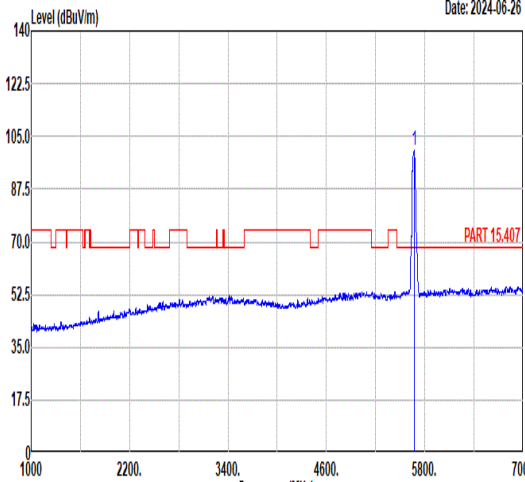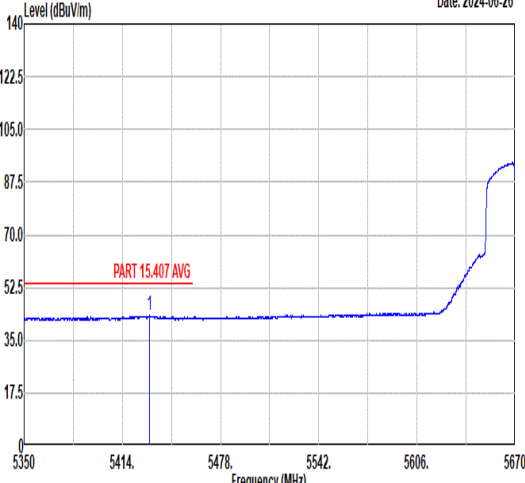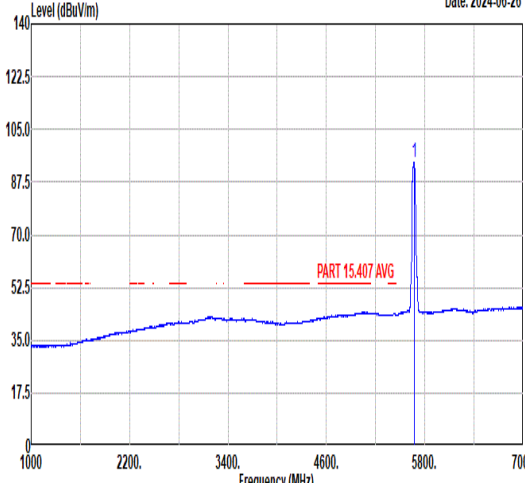

| Mode | 25 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|--------|--------|--------|--------|--------|--------|--------|-----------|------|-------|------|------|-------|--------|------|--------|--|-----|--------|--------|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|--------|-------|--------|-------|--------|-------|-------|--------|--------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|--------|-------|--------|-------|--------|------|------|--------|--------|-------|------|------|-------|--------|------|--------|---------|-------|--------|--------|-------|-------|-------|-------|-----|-----------|---|---------|--------|-------|-------|-------|-------|-------|-------|-----|--------|
| | Band Edge - L | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11n HT40_CH134_5670MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak |  <p>Date: 2024-06-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5420.88</td> <td>52.14</td> <td>74.00</td> <td>-21.86</td> <td>38.48</td> <td>34.82</td> <td>10.96</td> <td>32.12</td> <td>376</td> <td>0 PEAK</td> </tr> <tr> <td>2</td> <td>5463.15</td> <td>51.32</td> <td>68.30</td> <td>-16.98</td> <td>37.55</td> <td>34.81</td> <td>11.13</td> <td>32.17</td> <td>376</td> <td>0 PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5420.88 | 52.14 | 74.00 | -21.86 | 38.48 | 34.82 | 10.96 | 32.12 | 376 | 0 PEAK | 2 | 5463.15 | 51.32 | 68.30 | -16.98 | 37.55 | 34.81 | 11.13 | 32.17 | 376 | 0 PEAK |  <p>Date: 2024-06-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5670.00</td> <td>100.27</td> <td>-----</td> <td>-----</td> <td>85.89</td> <td>35.04</td> <td>11.68</td> <td>32.34</td> <td>376</td> <td>0 PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5670.00 | 100.27 | ----- | ----- | 85.89 | 35.04 | 11.68 | 32.34 | 376 | 0 PEAK |
| | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5420.88 | 52.14 | 74.00 | -21.86 | 38.48 | 34.82 | 10.96 | 32.12 | 376 | 0 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 5463.15 | 51.32 | 68.30 | -16.98 | 37.55 | 34.81 | 11.13 | 32.17 | 376 | 0 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5670.00 | 100.27 | ----- | ----- | 85.89 | 35.04 | 11.68 | 32.34 | 376 | 0 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg |  <p>Date: 2024-06-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5431.76</td> <td>43.10</td> <td>54.00</td> <td>-10.90</td> <td>29.42</td> <td>34.81</td> <td>11.00</td> <td>32.13</td> <td>376</td> <td>0 AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5431.76 | 43.10 | 54.00 | -10.90 | 29.42 | 34.81 | 11.00 | 32.13 | 376 | 0 AVERAGE |  <p>Date: 2024-06-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5670.00</td> <td>93.85</td> <td>-----</td> <td>-----</td> <td>79.48</td> <td>35.03</td> <td>11.68</td> <td>32.34</td> <td>376</td> <td>0 AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5670.00 | 93.85 | ----- | ----- | 79.48 | 35.03 | 11.68 | 32.34 | 376 | 0 AVERAGE | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5431.76 | 43.10 | 54.00 | -10.90 | 29.42 | 34.81 | 11.00 | 32.13 | 376 | 0 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | (dB) | Level | Factor | Loss | Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5670.00 | 93.85 | ----- | ----- | 79.48 | 35.03 | 11.68 | 32.34 | 376 | 0 AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 25 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|--------|--------|-------------|-------|--------|--------|------|--------|------|-------|------|-------|--------|-------------|--|--|--|-----|--------|--------|------|------|----|----|----|-----|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|--------|-------|
| | Band Edge - R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-2C_5.47-5.725_802.11n HT40_CH134_5670MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <p>Date: 2024-06-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5737.12</td> <td>54.39</td> <td>68.30</td> <td>-13.91</td> <td>40.01</td> <td>35.13</td> <td>11.65</td> <td>32.40</td> <td>376</td> <td>0 PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | Level | Factor | Loss Factor | | | | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5737.12 | 54.39 | 68.30 | -13.91 | 40.01 | 35.13 | 11.65 | 32.40 | 376 | 0 PEAK | Blank |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5737.12 | 54.39 | 68.30 | -13.91 | 40.01 | 35.13 | 11.65 | 32.40 | 376 | 0 PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 26 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|-------------|--------|--------|---------|--------|--------|----------------------|----------------------|--------|-------------|-------------|-------------|-----|-----|------------------------------|-----------------|-------|-------|-------|-------|-----|------|------------------------------|-------|-------|-------|-------|-----|-----|------|-------------------------------|-------|-------|-------|-------|-----|-----|------|-------------------------------|-------|-------|-------|-------|-----|-----|------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|------|-----|-------|--------|------|------|--------|----------------------|-------|--------|-------------|-------------|----|-----|--|------------------|-------|-------|-------|-------|-----|-----|------|
| | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-3_5.725-5.85_802.11a_CH149_5745MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5608.93 53.98 68.30 -14.32</td> <td>39.61</td> <td>34.95</td> <td>11.71</td> <td>32.29</td> <td>400</td> <td>276</td> <td>PEAK</td> </tr> <tr> <td>2 5650.01 50.95 68.31 -17.36</td> <td>36.58</td> <td>35.01</td> <td>11.69</td> <td>32.33</td> <td>400</td> <td>276</td> <td>PEAK</td> </tr> <tr> <td>3 5719.70 65.88 110.72 -44.84</td> <td>51.49</td> <td>35.11</td> <td>11.66</td> <td>32.38</td> <td>400</td> <td>276</td> <td>PEAK</td> </tr> <tr> <td>4 5720.00 65.83 110.80 -44.97</td> <td>51.44</td> <td>35.11</td> <td>11.66</td> <td>32.38</td> <td>400</td> <td>276</td> <td>PEAK</td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq Level Line (dB) | Level | Factor | Loss Factor | Loss Factor | cm | deg | | 1 5608.93 53.98 68.30 -14.32 | 39.61 | 34.95 | 11.71 | 32.29 | 400 | 276 | PEAK | 2 5650.01 50.95 68.31 -17.36 | 36.58 | 35.01 | 11.69 | 32.33 | 400 | 276 | PEAK | 3 5719.70 65.88 110.72 -44.84 | 51.49 | 35.11 | 11.66 | 32.38 | 400 | 276 | PEAK | 4 5720.00 65.83 110.80 -44.97 | 51.44 | 35.11 | 11.66 | 32.38 | 400 | 276 | PEAK | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5745.00 106.78</td> <td>92.40</td> <td>35.14</td> <td>11.64</td> <td>32.40</td> <td>400</td> <td>276</td> <td>PEAK</td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq Level Line (dB) | Level | Factor | Loss Factor | Loss Factor | cm | deg | | 1 5745.00 106.78 | 92.40 | 35.14 | 11.64 | 32.40 | 400 | 276 | PEAK |
| | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level | Factor | Loss Factor | Loss Factor | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5608.93 53.98 68.30 -14.32 | 39.61 | 34.95 | 11.71 | 32.29 | 400 | 276 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 5650.01 50.95 68.31 -17.36 | 36.58 | 35.01 | 11.69 | 32.33 | 400 | 276 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 5719.70 65.88 110.72 -44.84 | 51.49 | 35.11 | 11.66 | 32.38 | 400 | 276 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 5720.00 65.83 110.80 -44.97 | 51.44 | 35.11 | 11.66 | 32.38 | 400 | 276 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level | Factor | Loss Factor | Loss Factor | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5745.00 106.78 | 92.40 | 35.14 | 11.64 | 32.40 | 400 | 276 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | Blank | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5745.00 99.62</td> <td>85.24</td> <td>35.14</td> <td>11.64</td> <td>32.40</td> <td>400</td> <td>276</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq Level Line (dB) | Level | Factor | Loss Factor | Loss Factor | cm | deg | | 1 5745.00 99.62 | 85.24 | 35.14 | 11.64 | 32.40 | 400 | 276 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level | Factor | Loss Factor | Loss Factor | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5745.00 99.62 | 85.24 | 35.14 | 11.64 | 32.40 | 400 | 276 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 26 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|--------------------|------------------|------------------|------------|------------|--------|---------|---------|-------|--------|-------|-------|-------|-------|-------|-----|------|---------|---------|-------|-------|--------|-------|-------|-------|-------|-----|---|------|---|---------|-------|--------|--------|-------|-------|-------|-------|-----|---|------|---|---------|-------|--------|--------|-------|-------|-------|-------|-----|---|------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|------------|----------------|---------------------|-------------|---------------------|--------------------|-----------------|------------------|-----------|------------|--------|---|---------|--------|-------|-------|-------|-------|-------|-------|-----|---|------|
| | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-3_5.725-5.85_802.11a_CH149_5745MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit Line (dBuV/m)</th> <th>Margin (dB)</th> <th>Read Level (dBuV/m)</th> <th>Ant Level (dBuV/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5639.01</td> <td>54.29</td> <td>68.30</td> <td>-14.01</td> <td>39.93</td> <td>34.99</td> <td>11.69</td> <td>32.32</td> <td>362</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.03</td> <td>52.18</td> <td>68.32</td> <td>-16.14</td> <td>37.81</td> <td>35.01</td> <td>11.69</td> <td>32.33</td> <td>362</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5719.77</td> <td>63.49</td> <td>110.74</td> <td>-47.25</td> <td>49.10</td> <td>35.11</td> <td>11.66</td> <td>32.38</td> <td>362</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.21</td> <td>63.34</td> <td>111.27</td> <td>-47.93</td> <td>48.95</td> <td>35.11</td> <td>11.66</td> <td>32.38</td> <td>362</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table> | Peak | Freq (MHz) | Level (dBuV/m) | Limit Line (dBuV/m) | Margin (dB) | Read Level (dBuV/m) | Ant Level (dBuV/m) | Cable Loss (dB) | Preamp Loss (dB) | APos (cm) | TPos (deg) | Remark | 1 | 5639.01 | 54.29 | 68.30 | -14.01 | 39.93 | 34.99 | 11.69 | 32.32 | 362 | 0 | PEAK | 2 | 5650.03 | 52.18 | 68.32 | -16.14 | 37.81 | 35.01 | 11.69 | 32.33 | 362 | 0 | PEAK | 3 | 5719.77 | 63.49 | 110.74 | -47.25 | 49.10 | 35.11 | 11.66 | 32.38 | 362 | 0 | PEAK | 4 | 5720.21 | 63.34 | 111.27 | -47.93 | 48.95 | 35.11 | 11.66 | 32.38 | 362 | 0 | PEAK | <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit Line (dBuV/m)</th> <th>Margin (dB)</th> <th>Read Level (dBuV/m)</th> <th>Ant Level (dBuV/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>103.69</td> <td>70.00</td> <td>33.69</td> <td>89.31</td> <td>35.14</td> <td>11.64</td> <td>32.40</td> <td>362</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table> | Peak | Freq (MHz) | Level (dBuV/m) | Limit Line (dBuV/m) | Margin (dB) | Read Level (dBuV/m) | Ant Level (dBuV/m) | Cable Loss (dB) | Preamp Loss (dB) | APos (cm) | TPos (deg) | Remark | 1 | 5745.00 | 103.69 | 70.00 | 33.69 | 89.31 | 35.14 | 11.64 | 32.40 | 362 | 0 | PEAK |
| | Peak | Freq (MHz) | Level (dBuV/m) | Limit Line (dBuV/m) | Margin (dB) | Read Level (dBuV/m) | Ant Level (dBuV/m) | Cable Loss (dB) | Preamp Loss (dB) | APos (cm) | TPos (deg) | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5639.01 | 54.29 | 68.30 | -14.01 | 39.93 | 34.99 | 11.69 | 32.32 | 362 | 0 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 5650.03 | 52.18 | 68.32 | -16.14 | 37.81 | 35.01 | 11.69 | 32.33 | 362 | 0 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 5719.77 | 63.49 | 110.74 | -47.25 | 49.10 | 35.11 | 11.66 | 32.38 | 362 | 0 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | 5720.21 | 63.34 | 111.27 | -47.93 | 48.95 | 35.11 | 11.66 | 32.38 | 362 | 0 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | Freq (MHz) | Level (dBuV/m) | Limit Line (dBuV/m) | Margin (dB) | Read Level (dBuV/m) | Ant Level (dBuV/m) | Cable Loss (dB) | Preamp Loss (dB) | APos (cm) | TPos (deg) | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5745.00 | 103.69 | 70.00 | 33.69 | 89.31 | 35.14 | 11.64 | 32.40 | 362 | 0 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | Blank | <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit Line (dBuV/m)</th> <th>Margin (dB)</th> <th>Read Level (dBuV/m)</th> <th>Ant Level (dBuV/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>96.82</td> <td>70.00</td> <td>26.82</td> <td>82.44</td> <td>35.14</td> <td>11.64</td> <td>32.40</td> <td>362</td> <td>0</td> <td>AVERAGE</td> </tr> </tbody> </table> | Peak | Freq (MHz) | Level (dBuV/m) | Limit Line (dBuV/m) | Margin (dB) | Read Level (dBuV/m) | Ant Level (dBuV/m) | Cable Loss (dB) | Preamp Loss (dB) | APos (cm) | TPos (deg) | Remark | 1 | 5745.00 | 96.82 | 70.00 | 26.82 | 82.44 | 35.14 | 11.64 | 32.40 | 362 | 0 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | Freq (MHz) | Level (dBuV/m) | Limit Line (dBuV/m) | Margin (dB) | Read Level (dBuV/m) | Ant Level (dBuV/m) | Cable Loss (dB) | Preamp Loss (dB) | APos (cm) | TPos (deg) | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5745.00 | 96.82 | 70.00 | 26.82 | 82.44 | 35.14 | 11.64 | 32.40 | 362 | 0 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |






| Mode | 26 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|-------|--------|-------------|--------|--------|-------|--------|------|-------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|------|-----|-------|--------|------|------|--------|------|-------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-3_5.725-5.85_802.11a_CH149_5745MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11490.00</td> <td>48.79</td> <td>74.00</td> <td>-25.21</td> <td>44.87</td> <td>39.79</td> <td>14.83</td> <td>50.70</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17235.00</td> <td>49.01</td> <td>68.30</td> <td>-19.29</td> <td>40.96</td> <td>42.41</td> <td>17.57</td> <td>51.93</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 11490.00 | 48.79 | 74.00 | -25.21 | 44.87 | 39.79 | 14.83 | 50.70 | -- | -- | Peak | 2 | 17235.00 | 49.01 | 68.30 | -19.29 | 40.96 | 42.41 | 17.57 | 51.93 | -- | -- | Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11490.00</td> <td>48.22</td> <td>74.00</td> <td>-25.78</td> <td>44.30</td> <td>39.79</td> <td>14.83</td> <td>50.70</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17235.00</td> <td>48.59</td> <td>68.30</td> <td>-19.71</td> <td>40.54</td> <td>42.41</td> <td>17.57</td> <td>51.93</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 11490.00 | 48.22 | 74.00 | -25.78 | 44.30 | 39.79 | 14.83 | 50.70 | -- | -- | Peak | 2 | 17235.00 | 48.59 | 68.30 | -19.71 | 40.54 | 42.41 | 17.57 | 51.93 | -- | -- |
| Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 11490.00 | 48.79 | 74.00 | -25.21 | 44.87 | 39.79 | 14.83 | 50.70 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 17235.00 | 49.01 | 68.30 | -19.29 | 40.96 | 42.41 | 17.57 | 51.93 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 11490.00 | 48.22 | 74.00 | -25.78 | 44.30 | 39.79 | 14.83 | 50.70 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 17235.00 | 48.59 | 68.30 | -19.71 | 40.54 | 42.41 | 17.57 | 51.93 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 27 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|-------|--------|-------------|--------|--------|-------|--------|------|-------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|------|-----|-------|--------|------|------|--------|------|-------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-3_5.725-5.85_802.11a_CH157_5785MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | <p>Date: 2024-06-29</p> | <p>Date: 2024-06-29</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11570.00</td> <td>49.26</td> <td>74.00</td> <td>-24.74</td> <td>45.18</td> <td>39.86</td> <td>14.88</td> <td>50.66</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17355.00</td> <td>48.46</td> <td>68.30</td> <td>-19.84</td> <td>40.55</td> <td>42.36</td> <td>17.60</td> <td>52.05</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 11570.00 | 49.26 | 74.00 | -24.74 | 45.18 | 39.86 | 14.88 | 50.66 | -- | -- | Peak | 2 | 17355.00 | 48.46 | 68.30 | -19.84 | 40.55 | 42.36 | 17.60 | 52.05 | -- | -- | Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11570.00</td> <td>48.24</td> <td>74.00</td> <td>-25.76</td> <td>44.16</td> <td>39.86</td> <td>14.88</td> <td>50.66</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17355.00</td> <td>47.74</td> <td>68.30</td> <td>-20.56</td> <td>39.83</td> <td>42.36</td> <td>17.60</td> <td>52.05</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 11570.00 | 48.24 | 74.00 | -25.76 | 44.16 | 39.86 | 14.88 | 50.66 | -- | -- | Peak | 2 | 17355.00 | 47.74 | 68.30 | -20.56 | 39.83 | 42.36 | 17.60 | 52.05 | -- | -- |
| Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 11570.00 | 49.26 | 74.00 | -24.74 | 45.18 | 39.86 | 14.88 | 50.66 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 17355.00 | 48.46 | 68.30 | -19.84 | 40.55 | 42.36 | 17.60 | 52.05 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 11570.00 | 48.24 | 74.00 | -25.76 | 44.16 | 39.86 | 14.88 | 50.66 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 17355.00 | 47.74 | 68.30 | -20.56 | 39.83 | 42.36 | 17.60 | 52.05 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

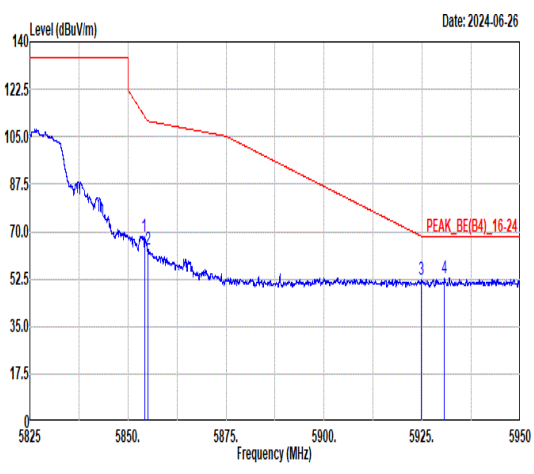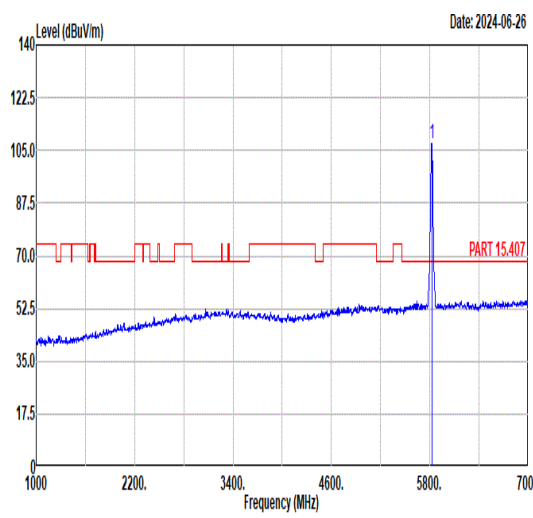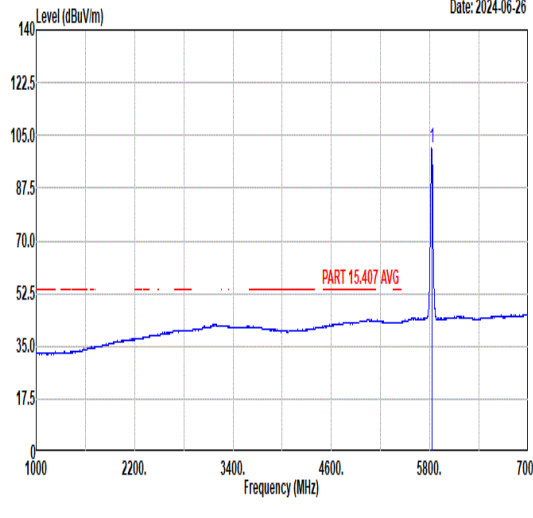

| Mode | 28 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|--------|-------------|-------|--------|--------|------|--------|---------|-------|-------|-------|--------|-------------|-------------|--|--|-----|--------|--------|--------|------|------|----|----|-----|-----|---------|---------|--------|--------|-------|-------|-------|-------|-------|-----|------|---------|---------|-------|--------|--------|-------|-------|-------|-------|-----|----|------|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|----|------|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|----|------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|--------|------|-----|-------|--------|------|------|--------|------|-------|------|-------|--------|-------------|--|--|--|-----|--------|--------|------|------|----|----|----|-----|---|---------|--------|-------|-------|-------|-------|-------|-------|-----|----|------|
| | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-3_5.725-5.85_802.11a_CH165_5825MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak |  <p>Date: 2024-06-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.19</td> <td>67.95</td> <td>112.65</td> <td>-44.70</td> <td>53.62</td> <td>35.30</td> <td>11.52</td> <td>32.49</td> <td>103</td> <td>63</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5855.19</td> <td>63.29</td> <td>110.75</td> <td>-47.46</td> <td>48.96</td> <td>35.30</td> <td>11.52</td> <td>32.49</td> <td>103</td> <td>63</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.83</td> <td>52.18</td> <td>68.33</td> <td>-16.15</td> <td>37.93</td> <td>35.39</td> <td>11.40</td> <td>32.54</td> <td>103</td> <td>63</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5930.69</td> <td>52.68</td> <td>68.30</td> <td>-15.62</td> <td>38.44</td> <td>35.40</td> <td>11.39</td> <td>32.55</td> <td>103</td> <td>63</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | Level | Factor | Loss Factor | | | | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5854.19 | 67.95 | 112.65 | -44.70 | 53.62 | 35.30 | 11.52 | 32.49 | 103 | 63 | PEAK | 2 | 5855.19 | 63.29 | 110.75 | -47.46 | 48.96 | 35.30 | 11.52 | 32.49 | 103 | 63 | PEAK | 3 | 5924.83 | 52.18 | 68.33 | -16.15 | 37.93 | 35.39 | 11.40 | 32.54 | 103 | 63 | PEAK | 4 | 5930.69 | 52.68 | 68.30 | -15.62 | 38.44 | 35.40 | 11.39 | 32.55 | 103 | 63 | PEAK |  <p>Date: 2024-06-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>107.37</td> <td>-----</td> <td>-----</td> <td>93.00</td> <td>35.25</td> <td>11.58</td> <td>32.46</td> <td>103</td> <td>63</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | Level | Factor | Loss Factor | | | | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5825.00 | 107.37 | ----- | ----- | 93.00 | 35.25 | 11.58 | 32.46 | 103 | 63 | PEAK |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5854.19 | 67.95 | 112.65 | -44.70 | 53.62 | 35.30 | 11.52 | 32.49 | 103 | 63 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 5855.19 | 63.29 | 110.75 | -47.46 | 48.96 | 35.30 | 11.52 | 32.49 | 103 | 63 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 5924.83 | 52.18 | 68.33 | -16.15 | 37.93 | 35.39 | 11.40 | 32.54 | 103 | 63 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | 5930.69 | 52.68 | 68.30 | -15.62 | 38.44 | 35.40 | 11.39 | 32.55 | 103 | 63 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5825.00 | 107.37 | ----- | ----- | 93.00 | 35.25 | 11.58 | 32.46 | 103 | 63 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | Blank |  <p>Date: 2024-06-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>100.67</td> <td>-----</td> <td>-----</td> <td>86.30</td> <td>35.25</td> <td>11.58</td> <td>32.46</td> <td>103</td> <td>63</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | Level | Factor | Loss Factor | | | | MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | 1 | 5825.00 | 100.67 | ----- | ----- | 86.30 | 35.25 | 11.58 | 32.46 | 103 | 63 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5825.00 | 100.67 | ----- | ----- | 86.30 | 35.25 | 11.58 | 32.46 | 103 | 63 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 28 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|--------|-------|--------|---------|------|--------|----------------------|----------------------|--------------|-------------|--|----|-----|-----|-------------------------------|-----------------|-------|-------|-------|-------|-----|------|-------------------------------|-------|-------|-------|-------|-----|---|------|------------------------------|-------|-------|-------|-------|-----|---|------|------------------------------|-------|-------|-------|-------|-----|---|------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|------|-----|-------|--------|------|------|--------|----------------------|--------------|-------------|--|--|----|-----|--|------------------|-------|-------|-------|-------|-----|---|------|
| | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-3_5.725-5.85_802.11a_CH165_5825MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5854.33 65.13 112.34 -47.21</td> <td>50.80</td> <td>35.30</td> <td>11.52</td> <td>32.49</td> <td>376</td> <td>1</td> <td>PEAK</td> </tr> <tr> <td>2 5855.00 61.86 110.80 -48.94</td> <td>47.53</td> <td>35.30</td> <td>11.52</td> <td>32.49</td> <td>376</td> <td>1</td> <td>PEAK</td> </tr> <tr> <td>3 5924.33 52.03 68.70 -16.67</td> <td>37.78</td> <td>35.39</td> <td>11.40</td> <td>32.54</td> <td>376</td> <td>1</td> <td>PEAK</td> </tr> <tr> <td>4 5948.08 53.75 68.30 -14.55</td> <td>39.52</td> <td>35.43</td> <td>11.36</td> <td>32.56</td> <td>376</td> <td>1</td> <td>PEAK</td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | 1 5854.33 65.13 112.34 -47.21 | 50.80 | 35.30 | 11.52 | 32.49 | 376 | 1 | PEAK | 2 5855.00 61.86 110.80 -48.94 | 47.53 | 35.30 | 11.52 | 32.49 | 376 | 1 | PEAK | 3 5924.33 52.03 68.70 -16.67 | 37.78 | 35.39 | 11.40 | 32.54 | 376 | 1 | PEAK | 4 5948.08 53.75 68.30 -14.55 | 39.52 | 35.43 | 11.36 | 32.56 | 376 | 1 | PEAK | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5825.00 105.46</td> <td>91.10</td> <td>35.26</td> <td>11.57</td> <td>32.47</td> <td>376</td> <td>1</td> <td>PEAK</td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | 1 5825.00 105.46 | 91.10 | 35.26 | 11.57 | 32.47 | 376 | 1 | PEAK |
| Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5854.33 65.13 112.34 -47.21 | 50.80 | 35.30 | 11.52 | 32.49 | 376 | 1 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 5855.00 61.86 110.80 -48.94 | 47.53 | 35.30 | 11.52 | 32.49 | 376 | 1 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 5924.33 52.03 68.70 -16.67 | 37.78 | 35.39 | 11.40 | 32.54 | 376 | 1 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 5948.08 53.75 68.30 -14.55 | 39.52 | 35.43 | 11.36 | 32.56 | 376 | 1 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5825.00 105.46 | 91.10 | 35.26 | 11.57 | 32.47 | 376 | 1 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | Blank | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5825.00 98.85</td> <td>84.48</td> <td>35.25</td> <td>11.58</td> <td>32.46</td> <td>376</td> <td>1</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | 1 5825.00 98.85 | 84.48 | 35.25 | 11.58 | 32.46 | 376 | 1 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level Factor | Loss Factor | | | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5825.00 98.85 | 84.48 | 35.25 | 11.58 | 32.46 | 376 | 1 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 28 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|-------|--------|-------------|--------|--------|--------|--------|------|-------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|------|-----|-------|--------|------|------|--------|------|-------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-3_5.725-5.85_802.11a_CH165_5825MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11650.00</td> <td>48.85</td> <td>74.00</td> <td>-25.15</td> <td>44.61</td> <td>39.92</td> <td>14.93</td> <td>50.61</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17475.00</td> <td>48.72</td> <td>68.30</td> <td>-19.58</td> <td>40.95</td> <td>42.31</td> <td>17.63</td> <td>52.17</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 11650.00 | 48.85 | 74.00 | -25.15 | 44.61 | 39.92 | 14.93 | 50.61 | -- | -- | Peak | 2 | 17475.00 | 48.72 | 68.30 | -19.58 | 40.95 | 42.31 | 17.63 | 52.17 | -- | -- | Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11650.00</td> <td>49.16</td> <td>74.00</td> <td>-24.84</td> <td>44.92</td> <td>39.92</td> <td>14.93</td> <td>50.61</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17475.00</td> <td>48.25</td> <td>68.30</td> <td>-20.05</td> <td>40.48</td> <td>42.31</td> <td>17.63</td> <td>52.17</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 11650.00 | 49.16 | 74.00 | -24.84 | 44.92 | 39.92 | 14.93 | 50.61 | -- | -- | Peak | 2 | 17475.00 | 48.25 | 68.30 | -20.05 | 40.48 | 42.31 | 17.63 | 52.17 | -- | -- | Peak |
| | Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 11650.00 | 48.85 | 74.00 | -25.15 | 44.61 | 39.92 | 14.93 | 50.61 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 17475.00 | 48.72 | 68.30 | -19.58 | 40.95 | 42.31 | 17.63 | 52.17 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 11650.00 | 49.16 | 74.00 | -24.84 | 44.92 | 39.92 | 14.93 | 50.61 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 17475.00 | 48.25 | 68.30 | -20.05 | 40.48 | 42.31 | 17.63 | 52.17 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 29 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|--------|-------|--------|--------|--------|-------|--------|---------|------|--------|--------|-----|--------|--------|--------|------|------|------|----|----|-----|-----|---|---------|---------|-------|--------|-------|-------|-------|-------|-------|-----|------|---------|---------|-------|-------|--------|-------|-------|-------|-------|-----|----|------|---|---------|-------|--------|--------|-------|-------|-------|-------|-----|----|------|---|---------|-------|--------|--------|-------|-------|-------|-------|-----|----|------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|------|-------|-------|--------|------|-----|-------|--------|------|------|--------|--|-----|--------|--------|------|------|------|----|----|----|-----|--|---|---------|--------|-------|-------|-------|-------|-------|-------|-----|----|------|
| | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-3_5.725-5.85_802.11n HT20_CH149_5745MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>(dB)</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5611.53</td> <td>53.38</td> <td>68.30</td> <td>-14.92</td> <td>39.01</td> <td>34.96</td> <td>11.71</td> <td>32.30</td> <td>356</td> <td>84</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.11</td> <td>52.07</td> <td>68.38</td> <td>-16.31</td> <td>37.70</td> <td>35.01</td> <td>11.69</td> <td>32.38</td> <td>356</td> <td>84</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5719.12</td> <td>63.03</td> <td>110.55</td> <td>-47.52</td> <td>48.64</td> <td>35.11</td> <td>11.66</td> <td>32.38</td> <td>356</td> <td>84</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5722.03</td> <td>70.33</td> <td>115.43</td> <td>-45.10</td> <td>55.95</td> <td>35.11</td> <td>11.65</td> <td>32.38</td> <td>356</td> <td>84</td> <td>PEAK</td> </tr> </tbody> </table> | Peak | Freq | Level | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | MHz | dBuV/m | dBuV/m | (dB) | dBuV | dB/m | dB | dB | cm | deg | | 1 | 5611.53 | 53.38 | 68.30 | -14.92 | 39.01 | 34.96 | 11.71 | 32.30 | 356 | 84 | PEAK | 2 | 5650.11 | 52.07 | 68.38 | -16.31 | 37.70 | 35.01 | 11.69 | 32.38 | 356 | 84 | PEAK | 3 | 5719.12 | 63.03 | 110.55 | -47.52 | 48.64 | 35.11 | 11.66 | 32.38 | 356 | 84 | PEAK | 4 | 5722.03 | 70.33 | 115.43 | -45.10 | 55.95 | 35.11 | 11.65 | 32.38 | 356 | 84 | PEAK | <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>(dB)</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>105.28</td> <td>-----</td> <td>-----</td> <td>90.90</td> <td>35.14</td> <td>11.64</td> <td>32.40</td> <td>356</td> <td>84</td> <td>PEAK</td> </tr> </tbody> </table> | Peak | Freq | Level | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | MHz | dBuV/m | dBuV/m | (dB) | dBuV | dB/m | dB | dB | cm | deg | | 1 | 5745.00 | 105.28 | ----- | ----- | 90.90 | 35.14 | 11.64 | 32.40 | 356 | 84 | PEAK |
| Peak | Freq | Level | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | MHz | dBuV/m | dBuV/m | (dB) | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5611.53 | 53.38 | 68.30 | -14.92 | 39.01 | 34.96 | 11.71 | 32.30 | 356 | 84 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 5650.11 | 52.07 | 68.38 | -16.31 | 37.70 | 35.01 | 11.69 | 32.38 | 356 | 84 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 5719.12 | 63.03 | 110.55 | -47.52 | 48.64 | 35.11 | 11.66 | 32.38 | 356 | 84 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | 5722.03 | 70.33 | 115.43 | -45.10 | 55.95 | 35.11 | 11.65 | 32.38 | 356 | 84 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | Freq | Level | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | MHz | dBuV/m | dBuV/m | (dB) | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5745.00 | 105.28 | ----- | ----- | 90.90 | 35.14 | 11.64 | 32.40 | 356 | 84 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | Blank | <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>(dB)</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>98.93</td> <td>-----</td> <td>-----</td> <td>84.55</td> <td>35.14</td> <td>11.64</td> <td>32.40</td> <td>356</td> <td>84</td> <td>AVERAGE</td> </tr> </tbody> </table> | Peak | Freq | Level | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | MHz | dBuV/m | dBuV/m | (dB) | dBuV | dB/m | dB | dB | cm | deg | | 1 | 5745.00 | 98.93 | ----- | ----- | 84.55 | 35.14 | 11.64 | 32.40 | 356 | 84 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | Freq | Level | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | MHz | dBuV/m | dBuV/m | (dB) | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5745.00 | 98.93 | ----- | ----- | 84.55 | 35.14 | 11.64 | 32.40 | 356 | 84 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 29 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|--------|-------|--------|--------|--------|-------|--------|---------|------|--------|--------|-----|--------|--------|--------|------|------|------|----|----|-----|-----|---|---------|---------|-------|--------|-------|-------|-------|-------|-------|-----|------|---------|---------|-------|-------|--------|-------|-------|-------|-------|-----|-----|------|---|---------|-------|--------|--------|-------|-------|-------|-------|-----|-----|------|---|---------|-------|--------|--------|-------|-------|-------|-------|-----|-----|------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|------|-------|-------|--------|------|-----|-------|--------|------|------|--------|--|-----|--------|--------|------|------|------|----|----|----|-----|--|---|---------|--------|-------|-------|-------|-------|-------|-------|-----|-----|------|
| | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-3_5.725-5.85_802.11n HT20_CH149_5745MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>(dB)</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5613.41</td> <td>53.66</td> <td>68.30</td> <td>-14.64</td> <td>39.30</td> <td>34.96</td> <td>11.70</td> <td>32.30</td> <td>366</td> <td>358</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.11</td> <td>52.46</td> <td>68.38</td> <td>-15.92</td> <td>38.09</td> <td>35.01</td> <td>11.69</td> <td>32.33</td> <td>366</td> <td>358</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5714.62</td> <td>62.03</td> <td>109.30</td> <td>-47.27</td> <td>47.65</td> <td>35.10</td> <td>11.66</td> <td>32.38</td> <td>366</td> <td>358</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5721.87</td> <td>69.13</td> <td>115.07</td> <td>-45.94</td> <td>54.75</td> <td>35.11</td> <td>11.65</td> <td>32.38</td> <td>366</td> <td>358</td> <td>PEAK</td> </tr> </tbody> </table> | Peak | Freq | Level | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | MHz | dBuV/m | dBuV/m | (dB) | dBuV | dB/m | dB | dB | cm | deg | | 1 | 5613.41 | 53.66 | 68.30 | -14.64 | 39.30 | 34.96 | 11.70 | 32.30 | 366 | 358 | PEAK | 2 | 5650.11 | 52.46 | 68.38 | -15.92 | 38.09 | 35.01 | 11.69 | 32.33 | 366 | 358 | PEAK | 3 | 5714.62 | 62.03 | 109.30 | -47.27 | 47.65 | 35.10 | 11.66 | 32.38 | 366 | 358 | PEAK | 4 | 5721.87 | 69.13 | 115.07 | -45.94 | 54.75 | 35.11 | 11.65 | 32.38 | 366 | 358 | PEAK | <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>(dB)</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>104.78</td> <td>-----</td> <td>-----</td> <td>90.40</td> <td>35.14</td> <td>11.64</td> <td>32.40</td> <td>366</td> <td>358</td> <td>PEAK</td> </tr> </tbody> </table> | Peak | Freq | Level | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | MHz | dBuV/m | dBuV/m | (dB) | dBuV | dB/m | dB | dB | cm | deg | | 1 | 5745.00 | 104.78 | ----- | ----- | 90.40 | 35.14 | 11.64 | 32.40 | 366 | 358 | PEAK |
| Peak | Freq | Level | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | MHz | dBuV/m | dBuV/m | (dB) | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5613.41 | 53.66 | 68.30 | -14.64 | 39.30 | 34.96 | 11.70 | 32.30 | 366 | 358 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 5650.11 | 52.46 | 68.38 | -15.92 | 38.09 | 35.01 | 11.69 | 32.33 | 366 | 358 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 5714.62 | 62.03 | 109.30 | -47.27 | 47.65 | 35.10 | 11.66 | 32.38 | 366 | 358 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | 5721.87 | 69.13 | 115.07 | -45.94 | 54.75 | 35.11 | 11.65 | 32.38 | 366 | 358 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | Freq | Level | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | MHz | dBuV/m | dBuV/m | (dB) | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5745.00 | 104.78 | ----- | ----- | 90.40 | 35.14 | 11.64 | 32.40 | 366 | 358 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | Blank | <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>(dB)</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>98.24</td> <td>-----</td> <td>-----</td> <td>83.86</td> <td>35.14</td> <td>11.64</td> <td>32.40</td> <td>366</td> <td>358</td> <td>AVERAGE</td> </tr> </tbody> </table> | Peak | Freq | Level | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | MHz | dBuV/m | dBuV/m | (dB) | dBuV | dB/m | dB | dB | cm | deg | | 1 | 5745.00 | 98.24 | ----- | ----- | 83.86 | 35.14 | 11.64 | 32.40 | 366 | 358 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | Freq | Level | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | MHz | dBuV/m | dBuV/m | (dB) | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5745.00 | 98.24 | ----- | ----- | 83.86 | 35.14 | 11.64 | 32.40 | 366 | 358 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 29 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|-------|--------|-------------|--------|--------|-------|--------|------|-------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|------|-----|-------|--------|------|------|--------|------|-------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-3_5.725-5.85_802.11n HT20_CH149_5745MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | <p>Date: 2024-06-29</p> | <p>Date: 2024-06-29</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11490.00</td> <td>47.88</td> <td>74.00</td> <td>-26.12</td> <td>43.96</td> <td>39.79</td> <td>14.83</td> <td>50.70</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17235.00</td> <td>47.78</td> <td>68.30</td> <td>-20.52</td> <td>39.73</td> <td>42.41</td> <td>17.57</td> <td>51.93</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 11490.00 | 47.88 | 74.00 | -26.12 | 43.96 | 39.79 | 14.83 | 50.70 | -- | -- | Peak | 2 | 17235.00 | 47.78 | 68.30 | -20.52 | 39.73 | 42.41 | 17.57 | 51.93 | -- | -- | Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11490.00</td> <td>48.06</td> <td>74.00</td> <td>-25.94</td> <td>44.14</td> <td>39.79</td> <td>14.83</td> <td>50.70</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17235.00</td> <td>48.18</td> <td>68.30</td> <td>-20.12</td> <td>40.13</td> <td>42.41</td> <td>17.57</td> <td>51.93</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 11490.00 | 48.06 | 74.00 | -25.94 | 44.14 | 39.79 | 14.83 | 50.70 | -- | -- | Peak | 2 | 17235.00 | 48.18 | 68.30 | -20.12 | 40.13 | 42.41 | 17.57 | 51.93 | -- | -- |
| Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 11490.00 | 47.88 | 74.00 | -26.12 | 43.96 | 39.79 | 14.83 | 50.70 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 17235.00 | 47.78 | 68.30 | -20.52 | 39.73 | 42.41 | 17.57 | 51.93 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 11490.00 | 48.06 | 74.00 | -25.94 | 44.14 | 39.79 | 14.83 | 50.70 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 17235.00 | 48.18 | 68.30 | -20.12 | 40.13 | 42.41 | 17.57 | 51.93 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 30 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|-------|--------|-------------|--------|--------|--------|--------|------|-------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|------|-----|-------|--------|------|------|--------|------|-------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-3_5.725-5.85_802.11n HT20_CH157_5785MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | <p>Date: 2024-06-29</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11570.00</td> <td>48.25</td> <td>74.00</td> <td>-25.75</td> <td>44.17</td> <td>39.86</td> <td>14.88</td> <td>50.66</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17355.00</td> <td>48.01</td> <td>68.30</td> <td>-20.29</td> <td>40.10</td> <td>42.36</td> <td>17.60</td> <td>52.05</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 11570.00 | 48.25 | 74.00 | -25.75 | 44.17 | 39.86 | 14.88 | 50.66 | -- | -- | Peak | 2 | 17355.00 | 48.01 | 68.30 | -20.29 | 40.10 | 42.36 | 17.60 | 52.05 | -- | -- | Peak | <p>Date: 2024-06-29</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11570.00</td> <td>48.63</td> <td>74.00</td> <td>-25.37</td> <td>44.55</td> <td>39.86</td> <td>14.88</td> <td>50.66</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17355.00</td> <td>48.34</td> <td>68.30</td> <td>-19.96</td> <td>40.43</td> <td>42.36</td> <td>17.60</td> <td>52.05</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 11570.00 | 48.63 | 74.00 | -25.37 | 44.55 | 39.86 | 14.88 | 50.66 | -- | -- | Peak | 2 | 17355.00 | 48.34 | 68.30 | -19.96 | 40.43 | 42.36 | 17.60 | 52.05 | -- | -- | Peak |
| | Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 11570.00 | 48.25 | 74.00 | -25.75 | 44.17 | 39.86 | 14.88 | 50.66 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 17355.00 | 48.01 | 68.30 | -20.29 | 40.10 | 42.36 | 17.60 | 52.05 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 11570.00 | 48.63 | 74.00 | -25.37 | 44.55 | 39.86 | 14.88 | 50.66 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 17355.00 | 48.34 | 68.30 | -19.96 | 40.43 | 42.36 | 17.60 | 52.05 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 31 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|-------------|--------|--------|---------|--------|--------|----------------------|----------------------|--------|-------------|-------------|-------------|-----|-----|-------------------------------|-----------------|-------|-------|-------|-------|-----|------|-------------------------------|-------|-------|-------|-------|-----|----|------|------------------------------|-------|-------|-------|-------|-----|----|------|------------------------------|-------|-------|-------|-------|-----|----|------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|------|-----|-------|--------|------|------|--------|----------------------|-------|--------|-------------|-------------|----|-----|--|------------------|-------|-------|-------|-------|-----|----|------|
| | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-3_5.725-5.85_802.11n HT20_CH165_5825MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5854.69 58.74 111.51 -52.77</td> <td>44.41</td> <td>35.30</td> <td>11.52</td> <td>32.49</td> <td>104</td> <td>30</td> <td>PEAK</td> </tr> <tr> <td>2 5855.44 60.57 110.68 -50.11</td> <td>46.24</td> <td>35.30</td> <td>11.52</td> <td>32.49</td> <td>104</td> <td>30</td> <td>PEAK</td> </tr> <tr> <td>3 5924.69 52.03 68.43 -16.40</td> <td>37.78</td> <td>35.39</td> <td>11.40</td> <td>32.54</td> <td>104</td> <td>30</td> <td>PEAK</td> </tr> <tr> <td>4 5933.08 52.19 68.30 -16.11</td> <td>37.94</td> <td>35.41</td> <td>11.39</td> <td>32.55</td> <td>104</td> <td>30</td> <td>PEAK</td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq Level Line (dB) | Level | Factor | Loss Factor | Loss Factor | cm | deg | | 1 5854.69 58.74 111.51 -52.77 | 44.41 | 35.30 | 11.52 | 32.49 | 104 | 30 | PEAK | 2 5855.44 60.57 110.68 -50.11 | 46.24 | 35.30 | 11.52 | 32.49 | 104 | 30 | PEAK | 3 5924.69 52.03 68.43 -16.40 | 37.78 | 35.39 | 11.40 | 32.54 | 104 | 30 | PEAK | 4 5933.08 52.19 68.30 -16.11 | 37.94 | 35.41 | 11.39 | 32.55 | 104 | 30 | PEAK | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5825.00 104.94</td> <td>90.57</td> <td>35.25</td> <td>11.58</td> <td>32.46</td> <td>104</td> <td>30</td> <td>PEAK</td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq Level Line (dB) | Level | Factor | Loss Factor | Loss Factor | cm | deg | | 1 5825.00 104.94 | 90.57 | 35.25 | 11.58 | 32.46 | 104 | 30 | PEAK |
| | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level | Factor | Loss Factor | Loss Factor | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5854.69 58.74 111.51 -52.77 | 44.41 | 35.30 | 11.52 | 32.49 | 104 | 30 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 5855.44 60.57 110.68 -50.11 | 46.24 | 35.30 | 11.52 | 32.49 | 104 | 30 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 5924.69 52.03 68.43 -16.40 | 37.78 | 35.39 | 11.40 | 32.54 | 104 | 30 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 5933.08 52.19 68.30 -16.11 | 37.94 | 35.41 | 11.39 | 32.55 | 104 | 30 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level | Factor | Loss Factor | Loss Factor | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5825.00 104.94 | 90.57 | 35.25 | 11.58 | 32.46 | 104 | 30 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | Blank | <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5825.00 98.48</td> <td>84.11</td> <td>35.25</td> <td>11.58</td> <td>32.46</td> <td>104</td> <td>30</td> <td>AVERAGE</td> </tr> </tbody> </table> | Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq Level Line (dB) | Level | Factor | Loss Factor | Loss Factor | cm | deg | | 1 5825.00 98.48 | 84.11 | 35.25 | 11.58 | 32.46 | 104 | 30 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq Level Line (dB) | Level | Factor | Loss Factor | Loss Factor | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 5825.00 98.48 | 84.11 | 35.25 | 11.58 | 32.46 | 104 | 30 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |






| Mode | 31 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|--------|-------|--------|--------|--------|-------|--------|---------|------|--------|--------|-----|--------|--------|--------|------|------|------|----|----|-----|-----|---|---------|---------|--------|--------|-------|-------|-------|-------|-------|-----|------|---------|---------|-------|--------|--------|-------|-------|-------|-------|-----|---|------|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|---|------|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|---|------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|------|-------|-------|--------|------|-----|-------|--------|------|------|--------|--|-----|--------|--------|------|------|------|----|----|----|-----|--|---|---------|--------|-------|-------|-------|-------|-------|-------|-----|---|------|
| | Band Edge | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-3_5.725-5.85_802.11n HT20_CH165_5825MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>(dB)</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.94</td> <td>61.60</td> <td>110.94</td> <td>-49.34</td> <td>47.27</td> <td>35.30</td> <td>11.52</td> <td>32.49</td> <td>376</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5855.00</td> <td>59.93</td> <td>110.80</td> <td>-50.87</td> <td>45.60</td> <td>35.30</td> <td>11.52</td> <td>32.49</td> <td>376</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5923.43</td> <td>52.92</td> <td>69.36</td> <td>-16.44</td> <td>38.66</td> <td>35.39</td> <td>11.41</td> <td>32.54</td> <td>376</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5931.19</td> <td>53.31</td> <td>68.30</td> <td>-14.99</td> <td>39.07</td> <td>35.40</td> <td>11.39</td> <td>32.55</td> <td>376</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table> | Peak | Freq | Level | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | MHz | dBuV/m | dBuV/m | (dB) | dBuV | dB/m | dB | dB | cm | deg | | 1 | 5854.94 | 61.60 | 110.94 | -49.34 | 47.27 | 35.30 | 11.52 | 32.49 | 376 | 0 | PEAK | 2 | 5855.00 | 59.93 | 110.80 | -50.87 | 45.60 | 35.30 | 11.52 | 32.49 | 376 | 0 | PEAK | 3 | 5923.43 | 52.92 | 69.36 | -16.44 | 38.66 | 35.39 | 11.41 | 32.54 | 376 | 0 | PEAK | 4 | 5931.19 | 53.31 | 68.30 | -14.99 | 39.07 | 35.40 | 11.39 | 32.55 | 376 | 0 | PEAK | <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>(dB)</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>104.09</td> <td>-----</td> <td>-----</td> <td>89.72</td> <td>35.25</td> <td>11.58</td> <td>32.46</td> <td>376</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table> | Peak | Freq | Level | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | MHz | dBuV/m | dBuV/m | (dB) | dBuV | dB/m | dB | dB | cm | deg | | 1 | 5825.00 | 104.09 | ----- | ----- | 89.72 | 35.25 | 11.58 | 32.46 | 376 | 0 | PEAK |
| Peak | Freq | Level | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | MHz | dBuV/m | dBuV/m | (dB) | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5854.94 | 61.60 | 110.94 | -49.34 | 47.27 | 35.30 | 11.52 | 32.49 | 376 | 0 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 5855.00 | 59.93 | 110.80 | -50.87 | 45.60 | 35.30 | 11.52 | 32.49 | 376 | 0 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 5923.43 | 52.92 | 69.36 | -16.44 | 38.66 | 35.39 | 11.41 | 32.54 | 376 | 0 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | 5931.19 | 53.31 | 68.30 | -14.99 | 39.07 | 35.40 | 11.39 | 32.55 | 376 | 0 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | Freq | Level | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | MHz | dBuV/m | dBuV/m | (dB) | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5825.00 | 104.09 | ----- | ----- | 89.72 | 35.25 | 11.58 | 32.46 | 376 | 0 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | Blank | <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>(dB)</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>97.87</td> <td>-----</td> <td>-----</td> <td>83.50</td> <td>35.25</td> <td>11.58</td> <td>32.46</td> <td>376</td> <td>0</td> <td>AVERAGE</td> </tr> </tbody> </table> | Peak | Freq | Level | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | MHz | dBuV/m | dBuV/m | (dB) | dBuV | dB/m | dB | dB | cm | deg | | 1 | 5825.00 | 97.87 | ----- | ----- | 83.50 | 35.25 | 11.58 | 32.46 | 376 | 0 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | Freq | Level | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | MHz | dBuV/m | dBuV/m | (dB) | dBuV | dB/m | dB | dB | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5825.00 | 97.87 | ----- | ----- | 83.50 | 35.25 | 11.58 | 32.46 | 376 | 0 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 31 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|-------|--------|-------------|--------|--------|-------|--------|------|-------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|------|-----|-------|--------|------|------|--------|------|-------|-------------|-------|--------|-------------|--|--|-----|--------|--------|----|------|------|----|----|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|------|---|----------|-------|-------|--------|-------|-------|-------|-------|----|----|
| | Harmonic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-3_5.725-5.85_802.11n HT20_CH165_5825MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak Avg | <p>Date: 2024-06-29</p> | <p>Date: 2024-06-29</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11650.00</td> <td>48.32</td> <td>74.00</td> <td>-25.68</td> <td>44.08</td> <td>39.92</td> <td>14.93</td> <td>50.61</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17475.00</td> <td>48.83</td> <td>68.30</td> <td>-19.47</td> <td>41.06</td> <td>42.31</td> <td>17.63</td> <td>52.17</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 11650.00 | 48.32 | 74.00 | -25.68 | 44.08 | 39.92 | 14.93 | 50.61 | -- | -- | Peak | 2 | 17475.00 | 48.83 | 68.30 | -19.47 | 41.06 | 42.31 | 17.63 | 52.17 | -- | -- | Peak | <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11650.00</td> <td>49.01</td> <td>74.00</td> <td>-24.99</td> <td>44.77</td> <td>39.92</td> <td>14.93</td> <td>50.61</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17475.00</td> <td>48.12</td> <td>68.30</td> <td>-20.18</td> <td>40.35</td> <td>42.31</td> <td>17.63</td> <td>52.17</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table> | Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | Freq | Level | Line Margin | Level | Factor | Loss Factor | | | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | 1 | 11650.00 | 49.01 | 74.00 | -24.99 | 44.77 | 39.92 | 14.93 | 50.61 | -- | -- | Peak | 2 | 17475.00 | 48.12 | 68.30 | -20.18 | 40.35 | 42.31 | 17.63 | 52.17 | -- | -- |
| Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 11650.00 | 48.32 | 74.00 | -25.68 | 44.08 | 39.92 | 14.93 | 50.61 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 17475.00 | 48.83 | 68.30 | -19.47 | 41.06 | 42.31 | 17.63 | 52.17 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit | Read | Ant | Cable | Preamp | Apos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line Margin | Level | Factor | Loss Factor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 11650.00 | 49.01 | 74.00 | -24.99 | 44.77 | 39.92 | 14.93 | 50.61 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 17475.00 | 48.12 | 68.30 | -20.18 | 40.35 | 42.31 | 17.63 | 52.17 | -- | -- | Peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

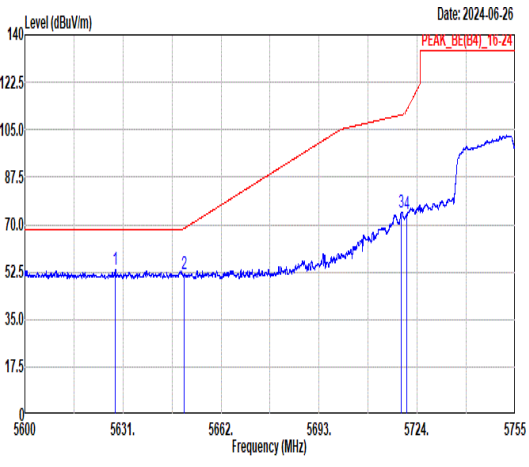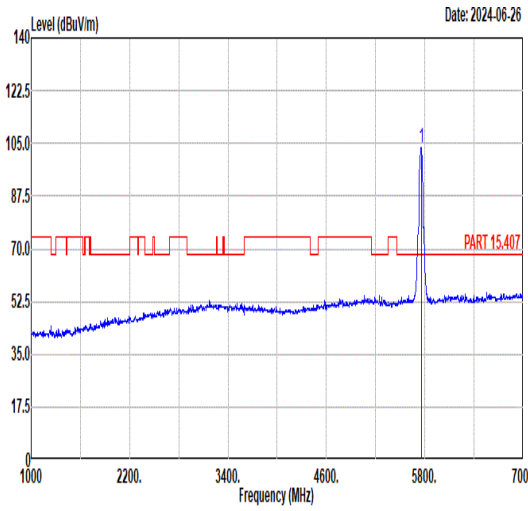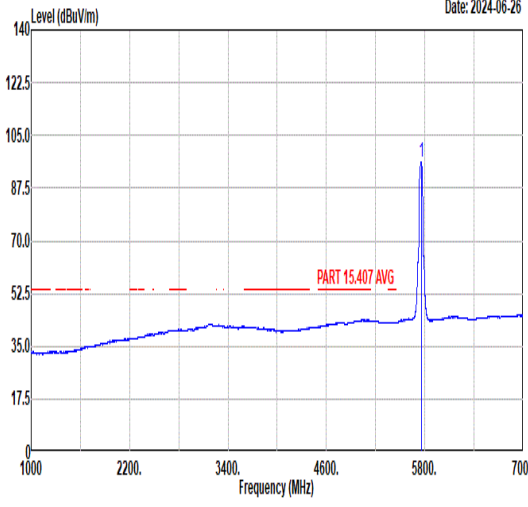

| Mode | 32 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|----------------|---------------------|---------------------|-------------------|-------------------|-----------------|------------------|------------------|------------|------------|--------|---------|---------|-------|--------|-------|-------|-------|-------|-------|-----|------|---------|---------|-------|-------|--------|-------|-------|-------|-------|-----|----|------|---|---------|-------|--------|--------|-------|-------|-------|-------|-----|----|------|---|---------|-------|--------|--------|-------|-------|-------|-------|-----|----|------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|------------|----------------|---------------------|-------------|-------------------|-----------------|-----------------|------------------|-----------|------------|--------|---|---------|--------|-------|-------|-------|-------|-------|-------|-----|----|------|
| | Band Edge - L | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-3_5.725-5.85_802.11n HT40_CH151_5755MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak |  <p>Date: 2024-06-26</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit Line (dBuV/m)</th> <th>Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Loss (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Gain (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5628.61</td> <td>53.29</td> <td>68.30</td> <td>-15.01</td> <td>38.92</td> <td>34.98</td> <td>11.70</td> <td>32.31</td> <td>104</td> <td>30</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.45</td> <td>51.62</td> <td>68.64</td> <td>-17.02</td> <td>37.25</td> <td>35.01</td> <td>11.69</td> <td>32.33</td> <td>104</td> <td>30</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5718.98</td> <td>74.38</td> <td>110.51</td> <td>-36.13</td> <td>59.99</td> <td>35.11</td> <td>11.66</td> <td>32.38</td> <td>104</td> <td>30</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.68</td> <td>74.18</td> <td>112.36</td> <td>-38.18</td> <td>59.79</td> <td>35.11</td> <td>11.66</td> <td>32.38</td> <td>104</td> <td>30</td> <td>PEAK</td> </tr> </tbody> </table> | Peak | Freq (MHz) | Level (dBuV/m) | Limit Line (dBuV/m) | Margin (dB) | Read Level (dBuV) | Ant Loss (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | APos (cm) | TPos (deg) | Remark | 1 | 5628.61 | 53.29 | 68.30 | -15.01 | 38.92 | 34.98 | 11.70 | 32.31 | 104 | 30 | PEAK | 2 | 5650.45 | 51.62 | 68.64 | -17.02 | 37.25 | 35.01 | 11.69 | 32.33 | 104 | 30 | PEAK | 3 | 5718.98 | 74.38 | 110.51 | -36.13 | 59.99 | 35.11 | 11.66 | 32.38 | 104 | 30 | PEAK | 4 | 5720.68 | 74.18 | 112.36 | -38.18 | 59.79 | 35.11 | 11.66 | 32.38 | 104 | 30 | PEAK |  <p>Date: 2024-06-26</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit Line (dBuV/m)</th> <th>Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Loss (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Gain (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5755.00</td> <td>103.71</td> <td>70.00</td> <td>33.71</td> <td>89.32</td> <td>35.16</td> <td>11.64</td> <td>32.41</td> <td>104</td> <td>30</td> <td>PEAK</td> </tr> </tbody> </table> | Peak | Freq (MHz) | Level (dBuV/m) | Limit Line (dBuV/m) | Margin (dB) | Read Level (dBuV) | Ant Loss (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | APos (cm) | TPos (deg) | Remark | 1 | 5755.00 | 103.71 | 70.00 | 33.71 | 89.32 | 35.16 | 11.64 | 32.41 | 104 | 30 | PEAK |
| Peak | Freq (MHz) | Level (dBuV/m) | Limit Line (dBuV/m) | Margin (dB) | Read Level (dBuV) | Ant Loss (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | APos (cm) | TPos (deg) | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5628.61 | 53.29 | 68.30 | -15.01 | 38.92 | 34.98 | 11.70 | 32.31 | 104 | 30 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 5650.45 | 51.62 | 68.64 | -17.02 | 37.25 | 35.01 | 11.69 | 32.33 | 104 | 30 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 5718.98 | 74.38 | 110.51 | -36.13 | 59.99 | 35.11 | 11.66 | 32.38 | 104 | 30 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | 5720.68 | 74.18 | 112.36 | -38.18 | 59.79 | 35.11 | 11.66 | 32.38 | 104 | 30 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | Freq (MHz) | Level (dBuV/m) | Limit Line (dBuV/m) | Margin (dB) | Read Level (dBuV) | Ant Loss (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | APos (cm) | TPos (deg) | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5755.00 | 103.71 | 70.00 | 33.71 | 89.32 | 35.16 | 11.64 | 32.41 | 104 | 30 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | Blank |  <p>Date: 2024-06-26</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit Line (dBuV/m)</th> <th>Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Loss (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Gain (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5755.00</td> <td>96.28</td> <td>52.50</td> <td>43.78</td> <td>81.89</td> <td>35.15</td> <td>11.64</td> <td>32.40</td> <td>104</td> <td>30</td> <td>AVERAGE</td> </tr> </tbody> </table> | Peak | Freq (MHz) | Level (dBuV/m) | Limit Line (dBuV/m) | Margin (dB) | Read Level (dBuV) | Ant Loss (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | APos (cm) | TPos (deg) | Remark | 1 | 5755.00 | 96.28 | 52.50 | 43.78 | 81.89 | 35.15 | 11.64 | 32.40 | 104 | 30 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | Freq (MHz) | Level (dBuV/m) | Limit Line (dBuV/m) | Margin (dB) | Read Level (dBuV) | Ant Loss (dB/m) | Cable Loss (dB) | Preamp Gain (dB) | APos (cm) | TPos (deg) | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5755.00 | 96.28 | 52.50 | 43.78 | 81.89 | 35.15 | 11.64 | 32.40 | 104 | 30 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 32 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|--------|--------|--------|--------|--------|--------|------|--------|------|-------|------|-------|--------|------|--------|----|-----|---|---------|-------|--------|--------|-------|-------|-------|-------|-----|----|------|---|---------|-------|--------|--------|-------|-------|-------|-------|-----|----|------|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|----|------|---|---------|-------|-------|--------|-------|-------|-------|-------|-----|----|------|-------|
| | Band Edge - R | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-3_5.725-5.85_802.11n HT40_CH151_5755MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Horizontal | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <p>Date: 2024-06-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5855.00</td> <td>51.02</td> <td>110.81</td> <td>-59.79</td> <td>36.69</td> <td>35.30</td> <td>11.52</td> <td>32.49</td> <td>104</td> <td>30</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5873.66</td> <td>50.95</td> <td>105.58</td> <td>-54.63</td> <td>36.64</td> <td>35.32</td> <td>11.49</td> <td>32.50</td> <td>104</td> <td>30</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5923.99</td> <td>51.68</td> <td>68.95</td> <td>-17.27</td> <td>37.42</td> <td>35.39</td> <td>11.41</td> <td>32.54</td> <td>104</td> <td>30</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5947.78</td> <td>52.36</td> <td>68.30</td> <td>-15.94</td> <td>38.13</td> <td>35.43</td> <td>11.36</td> <td>32.56</td> <td>104</td> <td>30</td> <td>PEAK</td> </tr> </tbody> </table> | Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | Freq | Level | Line | Level | Factor | Loss | Factor | cm | deg | 1 | 5855.00 | 51.02 | 110.81 | -59.79 | 36.69 | 35.30 | 11.52 | 32.49 | 104 | 30 | PEAK | 2 | 5873.66 | 50.95 | 105.58 | -54.63 | 36.64 | 35.32 | 11.49 | 32.50 | 104 | 30 | PEAK | 3 | 5923.99 | 51.68 | 68.95 | -17.27 | 37.42 | 35.39 | 11.41 | 32.54 | 104 | 30 | PEAK | 4 | 5947.78 | 52.36 | 68.30 | -15.94 | 38.13 | 35.43 | 11.36 | 32.56 | 104 | 30 | PEAK | Blank |
| Limit | Margin | Read | Ant | Cable | Preamp | APos | TPos | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Freq | Level | Line | Level | Factor | Loss | Factor | cm | deg | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5855.00 | 51.02 | 110.81 | -59.79 | 36.69 | 35.30 | 11.52 | 32.49 | 104 | 30 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 5873.66 | 50.95 | 105.58 | -54.63 | 36.64 | 35.32 | 11.49 | 32.50 | 104 | 30 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 5923.99 | 51.68 | 68.95 | -17.27 | 37.42 | 35.39 | 11.41 | 32.54 | 104 | 30 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | 5947.78 | 52.36 | 68.30 | -15.94 | 38.13 | 35.43 | 11.36 | 32.56 | 104 | 30 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



| Mode | 32 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|----------------|-----------------|-----------------|-----------------|------------------|-----------------|------------------|------------------|------------|------------|--------|---------|---------|-------|--------|-------|-------|-------|-------|-------|-----|------|---------|---------|-------|-------|--------|-------|-------|-------|-------|-----|---|------|---|---------|-------|--------|--------|-------|-------|-------|-------|-----|---|------|---|---------|-------|--------|--------|-------|-------|-------|-------|-----|---|------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|------------|----------------|-----------------|-------------|-------------|------------|-----------------|------------------|-----------|------------|--------|---|---------|--------|-------|-------|-------|-------|-------|-------|-----|---|------|
| | Band Edge - L | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | U-NII-3_5.725-5.85_802.11n HT40_CH151_5755MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ANT | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pol. | Vertical | Fundamental | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | <p>Date: 2024-06-26</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit Line (dB)</th> <th>Margin (dB)</th> <th>Read (dBuV)</th> <th>Ant (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5639.62</td> <td>53.05</td> <td>68.30</td> <td>-15.25</td> <td>38.68</td> <td>35.00</td> <td>11.69</td> <td>32.32</td> <td>368</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.45</td> <td>51.74</td> <td>68.64</td> <td>-16.90</td> <td>37.37</td> <td>35.01</td> <td>11.69</td> <td>32.33</td> <td>368</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5719.12</td> <td>71.07</td> <td>110.55</td> <td>-39.48</td> <td>56.68</td> <td>35.11</td> <td>11.66</td> <td>32.38</td> <td>368</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.20</td> <td>70.11</td> <td>111.26</td> <td>-41.15</td> <td>55.72</td> <td>35.11</td> <td>11.66</td> <td>32.38</td> <td>368</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table> | Peak | Freq (MHz) | Level (dBuV/m) | Limit Line (dB) | Margin (dB) | Read (dBuV) | Ant (dB/m) | Cable Loss (dB) | Preamp Loss (dB) | APos (cm) | TPos (deg) | Remark | 1 | 5639.62 | 53.05 | 68.30 | -15.25 | 38.68 | 35.00 | 11.69 | 32.32 | 368 | 0 | PEAK | 2 | 5650.45 | 51.74 | 68.64 | -16.90 | 37.37 | 35.01 | 11.69 | 32.33 | 368 | 0 | PEAK | 3 | 5719.12 | 71.07 | 110.55 | -39.48 | 56.68 | 35.11 | 11.66 | 32.38 | 368 | 0 | PEAK | 4 | 5720.20 | 70.11 | 111.26 | -41.15 | 55.72 | 35.11 | 11.66 | 32.38 | 368 | 0 | PEAK | <p>Date: 2024-06-26</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit Line (dB)</th> <th>Margin (dB)</th> <th>Read (dBuV)</th> <th>Ant (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5755.00</td> <td>101.93</td> <td>-----</td> <td>-----</td> <td>87.54</td> <td>35.16</td> <td>11.64</td> <td>32.41</td> <td>368</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table> | Peak | Freq (MHz) | Level (dBuV/m) | Limit Line (dB) | Margin (dB) | Read (dBuV) | Ant (dB/m) | Cable Loss (dB) | Preamp Loss (dB) | APos (cm) | TPos (deg) | Remark | 1 | 5755.00 | 101.93 | ----- | ----- | 87.54 | 35.16 | 11.64 | 32.41 | 368 | 0 | PEAK |
| Peak | Freq (MHz) | Level (dBuV/m) | Limit Line (dB) | Margin (dB) | Read (dBuV) | Ant (dB/m) | Cable Loss (dB) | Preamp Loss (dB) | APos (cm) | TPos (deg) | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5639.62 | 53.05 | 68.30 | -15.25 | 38.68 | 35.00 | 11.69 | 32.32 | 368 | 0 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 5650.45 | 51.74 | 68.64 | -16.90 | 37.37 | 35.01 | 11.69 | 32.33 | 368 | 0 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 5719.12 | 71.07 | 110.55 | -39.48 | 56.68 | 35.11 | 11.66 | 32.38 | 368 | 0 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | 5720.20 | 70.11 | 111.26 | -41.15 | 55.72 | 35.11 | 11.66 | 32.38 | 368 | 0 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | Freq (MHz) | Level (dBuV/m) | Limit Line (dB) | Margin (dB) | Read (dBuV) | Ant (dB/m) | Cable Loss (dB) | Preamp Loss (dB) | APos (cm) | TPos (deg) | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5755.00 | 101.93 | ----- | ----- | 87.54 | 35.16 | 11.64 | 32.41 | 368 | 0 | PEAK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Avg | Blank | <p>Date: 2024-06-26</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit Line (dB)</th> <th>Margin (dB)</th> <th>Read (dBuV)</th> <th>Ant (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5755.00</td> <td>94.72</td> <td>-----</td> <td>-----</td> <td>80.33</td> <td>35.16</td> <td>11.64</td> <td>32.41</td> <td>368</td> <td>0</td> <td>AVERAGE</td> </tr> </tbody> </table> | Peak | Freq (MHz) | Level (dBuV/m) | Limit Line (dB) | Margin (dB) | Read (dBuV) | Ant (dB/m) | Cable Loss (dB) | Preamp Loss (dB) | APos (cm) | TPos (deg) | Remark | 1 | 5755.00 | 94.72 | ----- | ----- | 80.33 | 35.16 | 11.64 | 32.41 | 368 | 0 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Peak | Freq (MHz) | Level (dBuV/m) | Limit Line (dB) | Margin (dB) | Read (dBuV) | Ant (dB/m) | Cable Loss (dB) | Preamp Loss (dB) | APos (cm) | TPos (deg) | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 5755.00 | 94.72 | ----- | ----- | 80.33 | 35.16 | 11.64 | 32.41 | 368 | 0 | AVERAGE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |