

TEST REPORT

Reference No..... : WTH21X05044788W-1
FCC ID : XOMD70S218-U-A-I
Applicant : SHENZHEN QIYUE OPTRONICS COMPANY LIMITED
Address : Flat3,Tower 3, Excellence Meilin Center Plaza, Zhongkang Road 128,
Shangmeilin, Futian District, Shenzhen , China
Product Name : 70" SMART 4K UHD TV
Test Model. : D70S218-U-A-I
Standards : FCC Part 15.407
Date of Receipt sample : May. 11, 2021
Date of Test..... : May. 11, 2021 to May. 26, 2021
Date of Issue : May. 26, 2021
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China

Tel.: +86-755-33663308

Fax.: +86-755-33663309


Tested by:

Reviewed By:

Approved & Authorized By:



Mike Shi / Project Engineer



Lion Cai / RF Manager



Silin Chen / Manager

TABLE OF CONTENTS

1. GENERAL INFORMATION	5
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
1.2 TEST STANDARDS	6
1.3 TEST METHODOLOGY	6
1.4 TABLE FOR PARAMETERS OF TEST SOFTWARE SETTING	6
1.5 EUT OPERATING DURING TEST	7
1.6 TEST FACILITY	7
1.7 EUT SETUP AND TEST MODE	8
1.8 MEASUREMENT UNCERTAINTY	9
1.9 TEST EQUIPMENT LIST AND DETAILS	10
2. SUMMARY OF TEST RESULTS	12
3. ANTENNA REQUIREMENT	13
3.1 STANDARD APPLICABLE	13
3.2 EVALUATION INFORMATION	13
4. AUTOMATICALLY DISCONTINUE TRANSMISSION	14
4.1 STANDARD APPLICABLE	14
4.2 SUMMARY OF TEST RESULTS	14
5. POWER SPECTRAL DENSITY	15
5.1 STANDARD APPLICABLE	15
5.2 TEST PROCEDURE	15
5.3 SUMMARY OF TEST RESULTS/PLOTS	16
6. EMISSION BANDWIDTH AND OCCUPIED BANDWIDTH	17
6.1 STANDARD APPLICABLE	17
6.2 TEST PROCEDURE	17
6.3 SUMMARY OF TEST RESULTS/PLOTS	19
7. MAXIMUM CONDUCTED OUTPUT POWER	20
7.1 STANDARD APPLICABLE	20
7.2 TEST PROCEDURE	20
7.3 SUMMARY OF TEST RESULTS/PLOTS	21
8. RADIATED SPURIOUS EMISSIONS	22
8.1 STANDARD APPLICABLE	22
8.2 TEST PROCEDURE	22
8.3 TEST RECEIVER SETUP	24
8.4 CORRECTED AMPLITUDE & MARGIN CALCULATION	24
8.5 SUMMARY OF TEST RESULTS/PLOTS	25
9. FREQUENCY STABILITY	46
9.1 STANDARD APPLICABLE	46
9.2 TEST PROCEDURE	46
9.3 SUMMARY OF TEST RESULTS/PLOTS	46
10 CONDUCTED EMISSIONS	47
10.1 TEST PROCEDURE	47
10.2 BASIC TEST SETUP BLOCK DIAGRAM	47
10.3 TEST RECEIVER SETUP	47
10.4 SUMMARY OF TEST RESULTS/PLOTS	47
APPENDIX SUMMARY	50
APPENDIX A	51
APPENDIX B	64
APPENDIX C	83
APPENDIX D	96

APPENDIX PHOTOGRAPHS.....98

Report version

Version No.	Date of issue	Description
Rev.00	May. 26, 2021	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: SHENZHEN QIYUE OPTRONICS COMPANY LIMITED
 Address of applicant: Flat3,Tower 3, Excellence Meilin Center Plaza, Zhongkang Road 128, Shangmeilin, Futian District, Shenzhen , China

Manufacturer: SHENZHEN QIYUE OPTRONICS COMPANY LIMITED
 BRANCH
 Address of manufacturer: A/B/C/D Building, Xitian Industrial Park, Dashuikeng Community,Guanlan Street, Longhua New District, Shenzhen City, China

General Description of EUT	
Product Name:	70" SMART 4K UHD TV
Trade Name:	RCA, PROSCAN, RCA SCENIUM, TECHNICOLOR, SYLVANIA, RCASMAVIRTUOSO
Model No.:	D70S218-U-A-I
Adding Model(s):	RWOSU7049-B, XXXXXXXXXXXX70XXXXXXXXXXXXXX (Where "X" can be any alphanumeric of A-Z or 0-9 or blank or -,indicates different client)
Rated Voltage:	AC100-120V/60Hz
Battery Capacity:	/
Power Adapter:	/
Software Version:	/
Hardware Version:	/
<i>Note: The test data is gathered from a production sample, provided by the manufacturer. The appearance of others models listed in the report is different from main-test model D70S218-U-A-I, but the circuit and the electronic construction do not change, declared by the manufacturer.</i>	

Technical Characteristics of EUT	
Support Standards:	802.11a, 802.11n(HT20) , 802.11n-HT40, 802.11ac-HT80
Frequency Range:	5150-5250MHz, 5725-5850MHz
RF Output Power:	Antenna 0:14.46dBm (Conducted) Antenna 1: 14.67dBm (Conducted)
Type of Modulation:	BPSK, QPSK,16QAM,64QAM
Type of Antenna:	Integral Antenna
Antenna Gain:	2dBi

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.407: General technical requirements.

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

KDB789033 D02 v02r01: GUIDELINES FOR COMPLIANCE TESTING OF UNLICENSED NATIONAL INFORMATION INFRASTRUCTURE (U-NII) DEVICES PART 15, SUBPARTE.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, KDB789033 D02 v02r01. The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Table for parameters of Test Software setting

Use “QATool_Dbg.exe” and follow the instructions given by the manufacturer, you can start to test. During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Mode	Ant.	Test Frequency (MHz)												
		NCB: 20MHz												
		5180	5200	5240	5260	5300	5320	5500	5580	5700	5720	5745	5785	5825
802.11a 6Mbps	ANT 0	1F	1F	1F	/	/	/	/	/	/	/	22	22	22
	ANT 1	24	24	24	/	/	/	/	/	/	/	22	22	22
802.11n-HT20 MCS0	ANT 0	1F	1F	1F	/	/	/	/	/	/	/	21	22	22
	ANT 1	23	23	23	/	/	/	/	/	/	/	23	23	23
Mode	Ant.	NCB: 40MHz												
		5190	5230	5270	5310	5510	5550	5670	5710	5755	5795			
		802.11n-HT40 MCS0	ANT 0	1F	1F	/	/	/	/	/	/	22	22	
ANT 1	23		23	/	/	/	/	/	/	22	22			
Mode	Ant.	NCB: 80MHz												
		5210	5290	5530	5610	5690	5775							
		802.11ac-VH80 MCS0/Nss2	ANT 0	1E	/	/	/	/	21					
ANT 1	22		/	/	/	/	21							

1.5 EUT Operating during test

EUT was programmed to be in continuously transmitting mode. During the test, EUT operation to normal function and programs under Android were executed.

1.6 Test Facility

Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C. (518101)

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

1.7 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	802.11a	5180MHz,5200MHz,5240MHz, 5745MHz, 5785MHz,5825MHz
TM2	802.11n-HT20	5180MHz,5200MHz,5240MHz,5745MHz, 5785MHz,5825MHz
TM3	802.11n-HT40	5190MHz,5230MHz, 5755MHz,5795MHz
TM4	802.11ac-VH80	5210MHz ,5775 MHz
Note : 802.11ac-VHT20, 802.11ac-VHT40 covered by 802.11n-HT20 and 802.11n-HT40.		

Test Conditions	
Temperature:	22~25 °C
Relative Humidity:	45~55 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
AC Cable	1.5	Unshielded	Without Ferrite

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
/	/	/	/

1.8 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Power Spectral Density	Conducted	$\pm 1.8\text{dB}$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-18GHz $\pm 3.92\text{dB}$

1.9 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due. Date
SEMT-1075	Communication Tester	Rohde & Schwarz	CMW500	148650	2021-03-27	2022-03-26
SEMT-1063	GSM Tester	Rohde & Schwarz	CMU200	114403	2021-03-27	2022-03-26
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2021-03-27	2022-03-26
SEMT-1079	Spectrum Analyzer	Agilent	N9020A	US47140102	2021-03-27	2022-03-26
SEMT-1080	Signal Generator	Agilent	83752A	3610A01453	2021-03-27	2022-03-26
SEMT-1081	Vector Signal Generator	Agilent	N5182A	MY47070202	2021-03-27	2022-03-26
SEMT-1028	Power Divider	Weinschel	1506A	PM204	2021-03-27	2022-03-26
SEMT-1082	Power Divider	RF-Lambda	RFLT4W5M18G	14110400027	2021-03-27	2022-03-26
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2021-03-27	2022-03-26
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2021-03-27	2022-03-26
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2021-04-12	2022-04-11
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2021-04-12	2022-04-11
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2021-03-19	2023-03-18
SEMT-1068	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2021-03-19	2023-03-18
SEMT-1042	Horn Antenna	ETS	3117	00086197	2021-03-19	2023-03-18
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2021-04-27	2023-04-26
SEMT-1169	Pre-amplifier	Direction Systems Inc.	PAP-2640	14145-14153	2021-04-27	2022-04-26
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2021-03-27	2022-03-26
SEMT-1166	Power Limiter	Agilent	N9356B	MY45450376	2021-03-27	2022-03-26
SEMT-1076	RF Switcher	Top Precision	RCS03-A2	/	2021-03-19	2023-03-18
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	/	/
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	/	/
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	/	/
SEMT-C004	Cable	Zheng DI	2M0RFC	/	/	/
SEMT-C005	Cable	Zheng DI	1M0RFC	/	/	/
SEMT-C006	Cable	Zheng DI	1M0RFC	/	/	/

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission)*	Farad	EZ-EMC	RA-03A1

*Remark: indicates software version used in the compliance certification testing

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§15.203; §15.405	Antenna Requirement	Compliant
15.407 (c)	Automatically Discontinue Transmission	Compliant
§15.207; §15.407(b)(6)	Conducted Emission	Compliant
§15.407(a)(1),(2)	Power Spectral Density	Compliant
§15.407(e)	Emission Bandwidth and Occupied Bandwidth	Compliant
§15.407(a)(1),(2)	Maximum Conducted Output Power	Compliant
§15.407(b)(1),(2),(3),(4)	Undesirable emission	Compliant
§15.205; §15.407(b)(1),(2),(3)	Radiated Emission	Compliant
§15.407(g)	Frequency Stability	Compliant
§15.407(h)	Dynamic Frequency Selection (DFS)	Compliant

N/A: Not applicable

3. Antenna Requirement

3.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Evaluation Information

This product has two integral antennas, fulfill the requirement of this section.

4. Automatically Discontinue Transmission

4.1 Standard Applicable

According to FCC Part 15.407(c), the device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

4.2 Summary of Test Results

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.

5. Power Spectral Density

5.1 Standard Applicable

Section 15.407(a) Power limits:

(1) For the band 5.15-5.25 GHz.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

5.2 Test Procedure

According to 789033 D02 v02r01 General UNII Test Procedures New Rules v02, the following is the measurement procedure.

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500

kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500kHz bandwidth, the following adjustments to the procedures apply:

- a) Set RBW $\geq 1/T$, where T is defined in section II.B.1.a).
- b) Set VBW ≥ 3 RBW.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/\text{RBW})$ to the measured result, whereas RBW (< 500 kHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10\log(1\text{MHz}/\text{RBW})$ to the measured result, whereas RBW (< 1 MHz) is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 kHz for the sections 5.c) and 5.d) above, since RBW=100 kHz is available on nearly all spectrum analyzers.

5.3 Summary of Test Results/Plots

Please refer to Appendix A

6. Emission Bandwidth and Occupied Bandwidth

6.1 Standard Applicable

According to 15.407(a) and (e):

(1) For the band 5.15-5.25 GHz.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(e) Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

6.2 Test Procedure

According to 789033 D02 v02r0r section C&D, the following is the measurement procedure.

1. Emission Bandwidth (EBW)

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = Peak.

- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

2. Minimum Emission Bandwidth for the band 5.725-5.85 GHz

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.715-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described above.

D. 99 Percent Occupied Bandwidth

The 99-percent occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5 % of the total mean power of the given emission. Measurement of the 99-percent occupied bandwidth is required only as a condition for using the optional band-edge measurement techniques described in section II.G.3.d). Measurements of 99-percent occupied bandwidth may also optionally be used in lieu of the EBW to 789033 D02 v02r01 General UNII Test Procedures New Rules v01 define the minimum frequency range over which the spectrum is integrated when measuring maximum conducted output power as described in section II.E. However, the EBW must be measured to determine bandwidth dependent limits on maximum conducted output power in accordance with 15.407(a).

The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW $\geq 3 * RBW$
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

6.3 Summary of Test Results/Plots

Please refer to Appendix B

7. Maximum Conducted Output Power

7.1 Standard Applicable

Section 15.407(a) Power limits:

(1) For the band 5.15-5.25 GHz.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

7.2 Test Procedure

According to KDB789033 D02 v02r01 section E, the following is the measurement procedure.

- (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- (ii) Set RBW = 1 MHz.
- (iii) Set VBW \geq 3 MHz.
- (iv) Number of points in sweep \geq 2 Span / RBW. (This ensures that bin-to-bin spacing is \leq RBW/2, so that narrowband signals are not lost between frequency bins.)

Waltek Testing Group (Shenzhen) Co., Ltd.

[Http://www.waltek.com.cn](http://www.waltek.com.cn)

- (v) Sweep time = auto.
- (vi) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- (vii) If transmit duty cycle < 98 percent, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle \geq 98 percent, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run”.
- (viii) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- (ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument’s band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at 1 MHz intervals extending across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the spectrum.

7.3 Summary of Test Results/Plots

Please refer to Appendix C

8. Radiated Spurious Emissions

8.1 Standard Applicable

According to §15.407(b), undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
 - (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

According to §15.407(b)(6), Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.

According to §15.407(b)(7), The provisions of §15.205 apply to intentional radiators operating under this section.
789033 D02 v02r01 General UNII Test Procedures New Rules v01

If radiated measurements are performed, field strength is then converted to EIRP as follows:

$$\text{EIRP} = ((E*d)^2) / 30$$

where:

- E is the field strength in V/m;
- d is the measurement distance in meters;
- EIRP is the equivalent isotropically radiated power in watts.

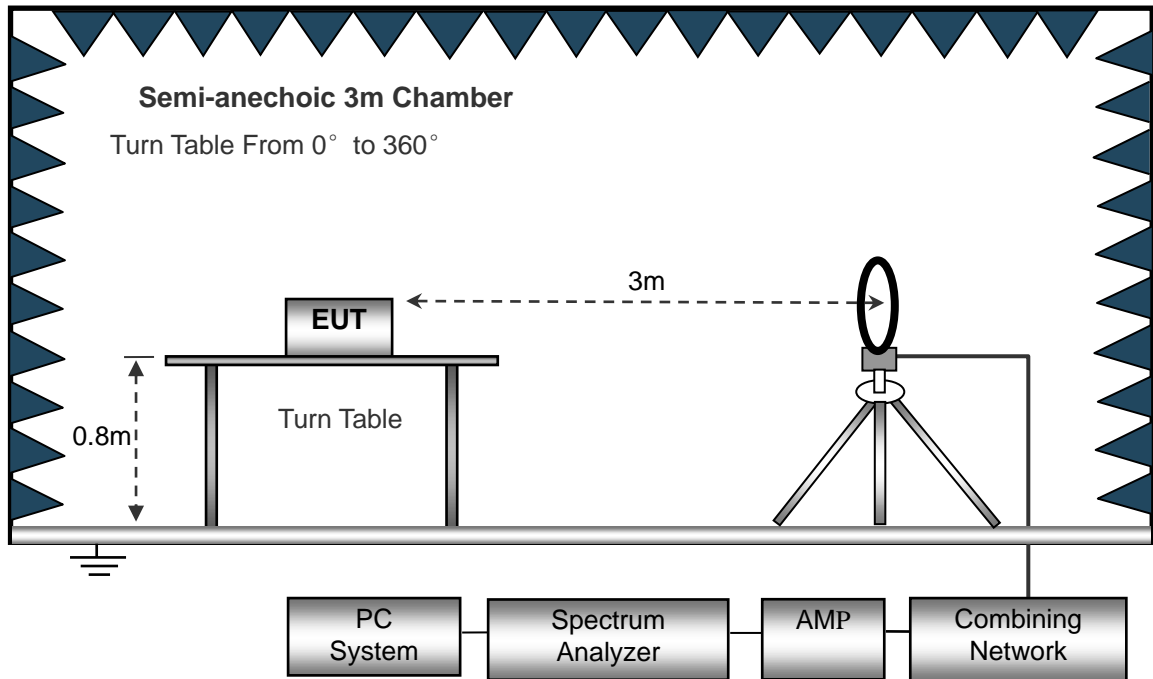
8.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.407(b)(6) and FCC Part 15.209 Limit..

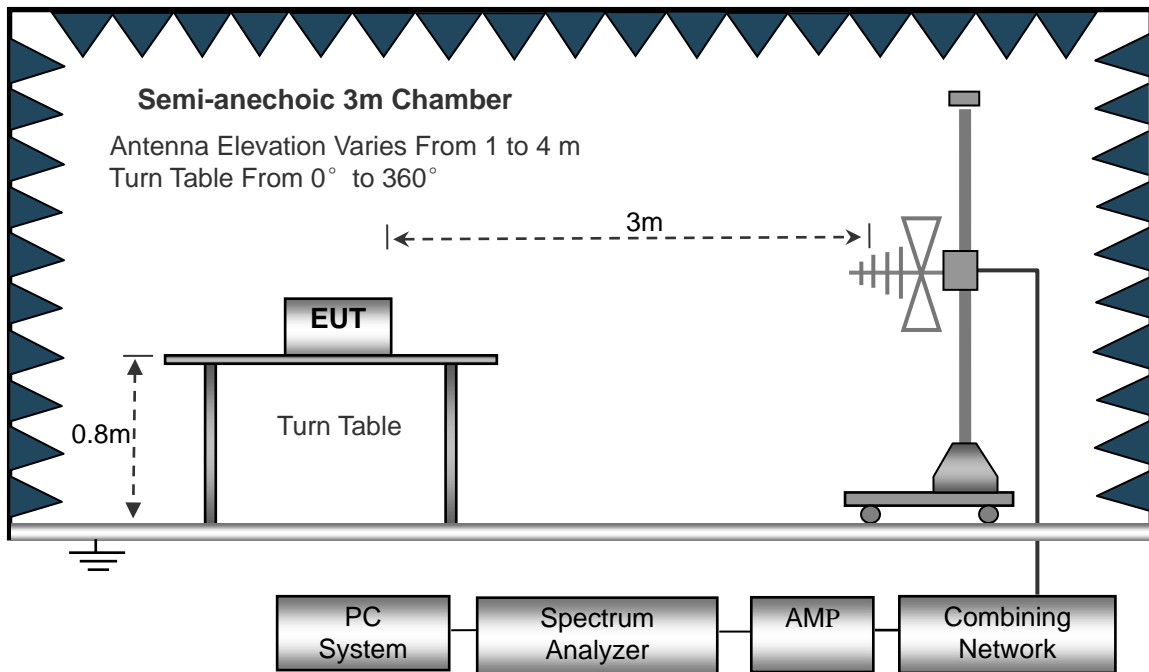
The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

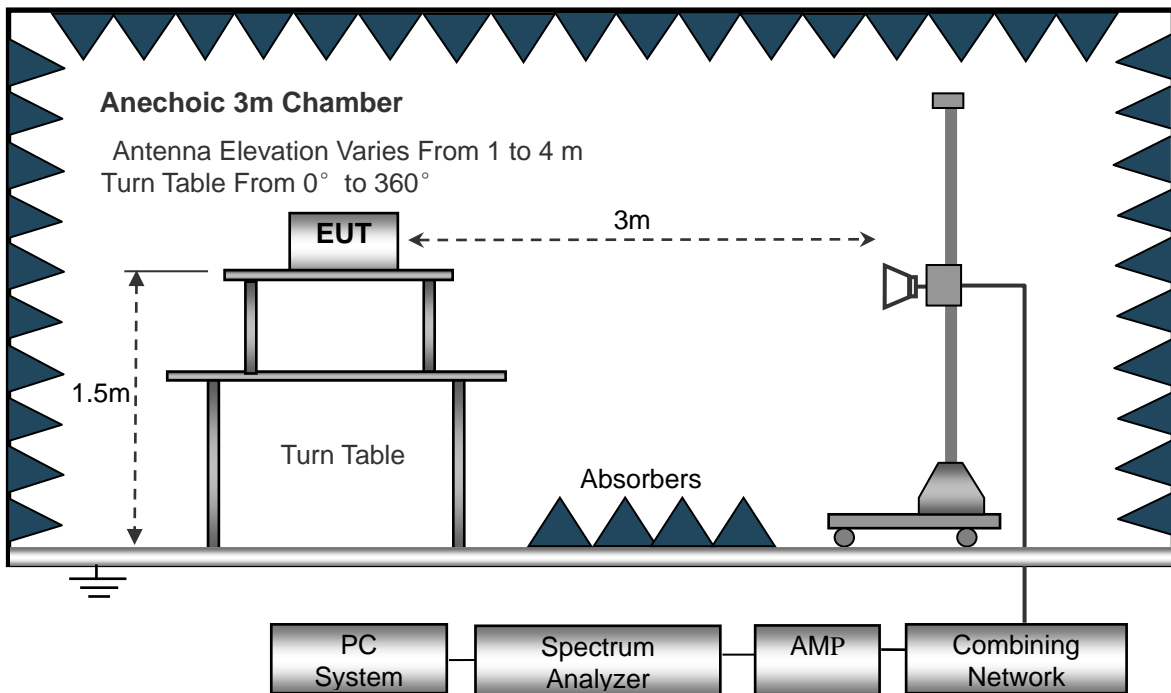
The test setup for emission measurement below 30MHz..



The test setup for emission measurement from 30 MHz to 1 GHz..



The test setup for emission measurement above 1 GHz..



8.3 Test Receiver Setup

During the radiated emission test for above 1GHz, the test receiver was set with the following configurations:

For peak detector:

RBW = 1000kHz, VBW = 3000kHz, Sweep Time = Auto

For average detector:

RBW = 1000kHz, VBW = 10Hz, Sweep Time = Auto

8.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

8.5 Summary of Test Results/Plots

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

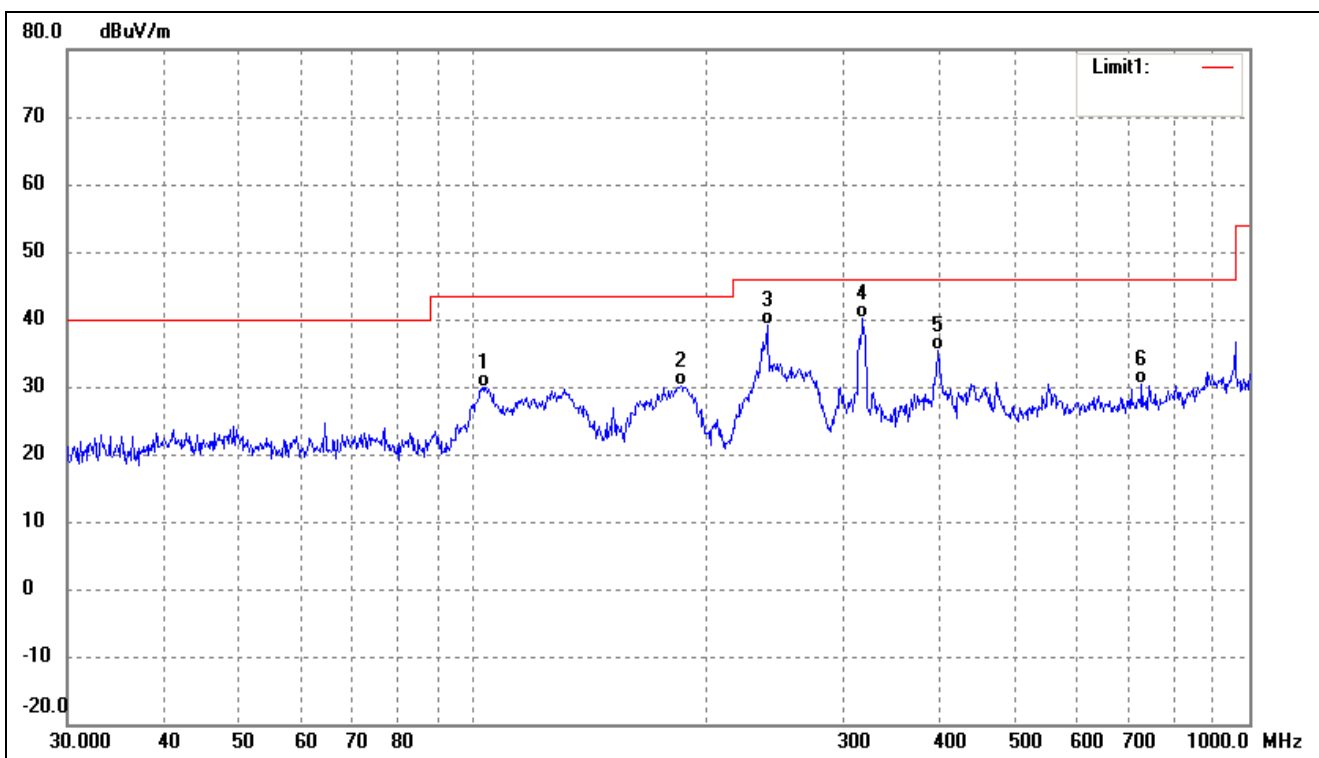
➤ Spurious Emission From 30 MHz to 1 GHz

➤ Antenna 0(Worst case)

➤ 5150-5250MHz

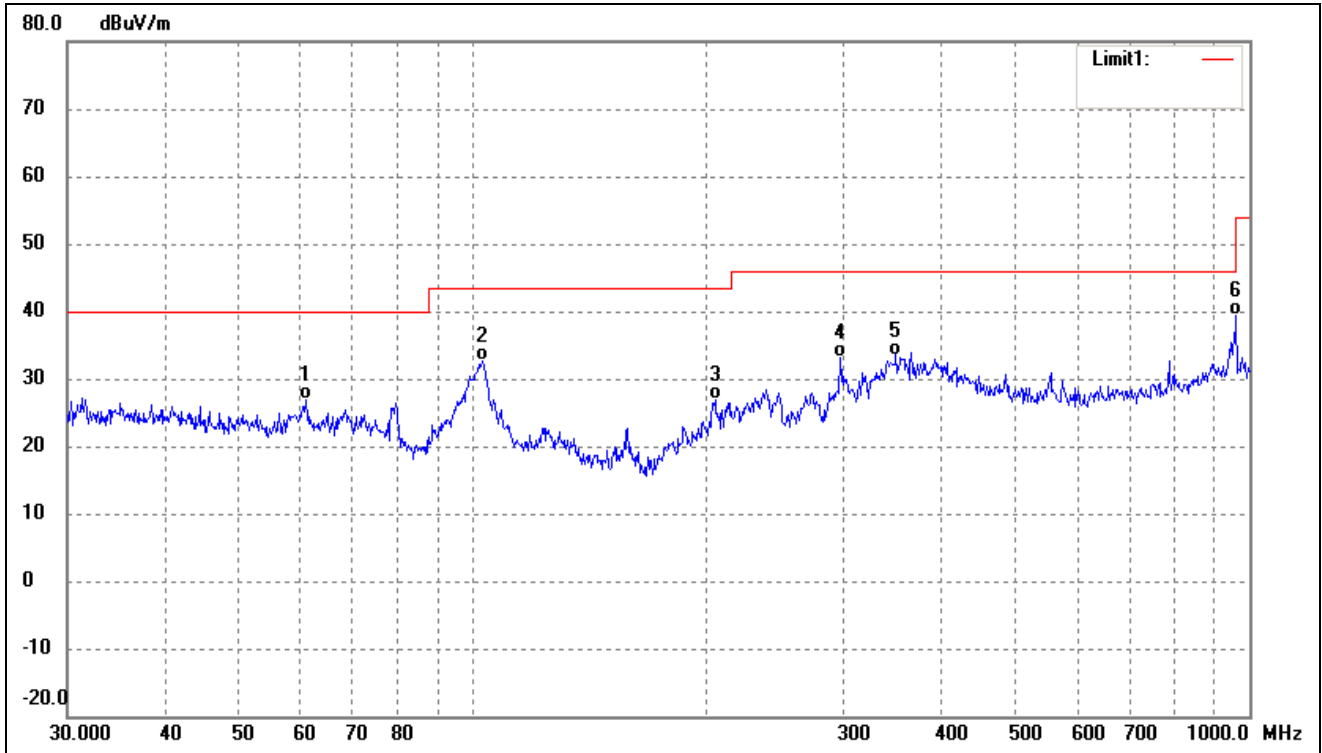
802.11a(Worst case)

Test Channel	5180MHz	Polarity:	Horizontal
--------------	---------	-----------	------------



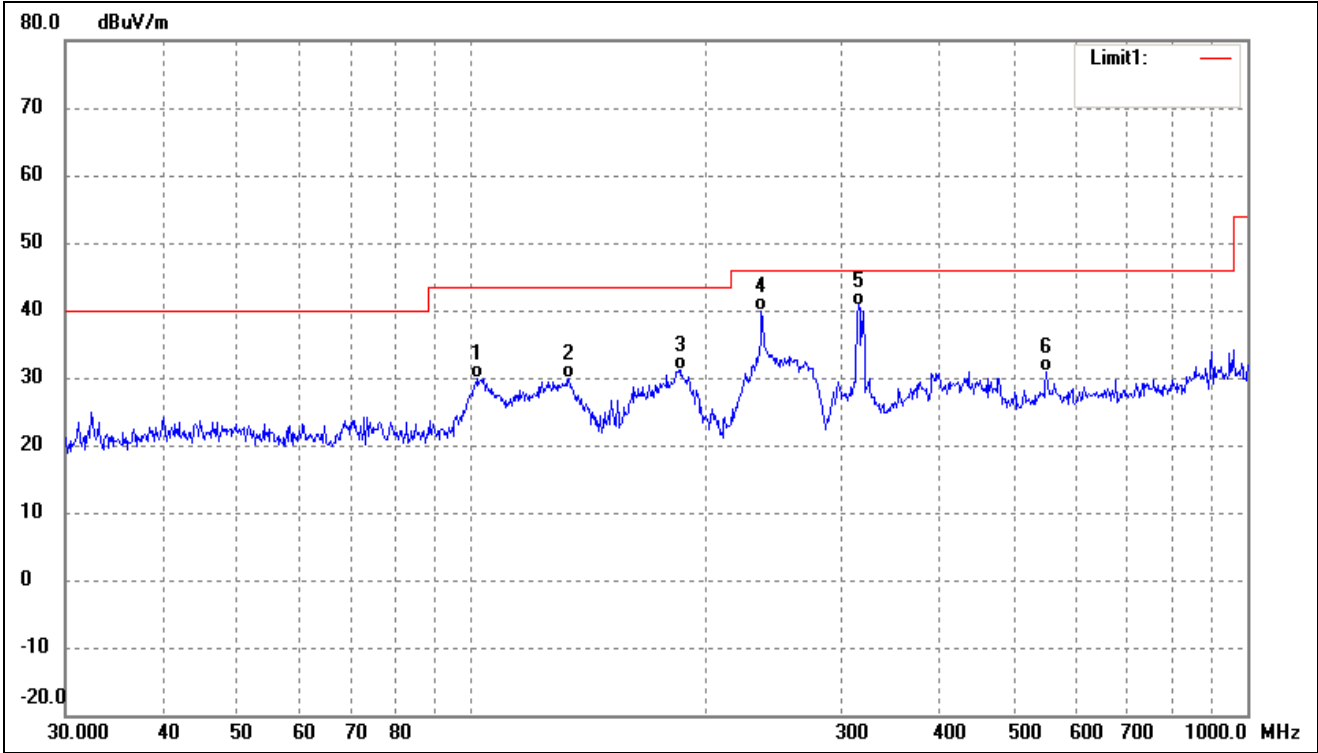
No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	103.4421	43.29	-13.31	29.98	43.50	-13.52	-	-	QP
2	185.1379	43.73	-13.69	30.04	43.50	-13.46	-	-	QP
3	239.1473	50.66	-11.46	39.20	46.00	-6.80	-	-	QP
4	317.7011	49.12	-8.94	40.18	46.00	-5.82	-	-	QP
5	397.6334	41.95	-6.53	35.42	46.00	-10.58	-	-	QP
6	726.8052	31.48	-1.00	30.48	46.00	-15.52	-	-	QP

802.11a(Worst case)			
Test Channel	5180MHz	Polarity:	Vertical



No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	60.9176	40.02	-13.15	26.87	40.00	-13.13	-	-	QP
2	102.7192	46.03	-13.32	32.71	43.50	-10.79	-	-	QP
3	204.9551	39.32	-12.37	26.95	43.50	-16.55	-	-	QP
4	297.2241	42.32	-9.13	33.19	46.00	-12.81	-	-	QP
5	350.4768	40.93	-7.43	33.50	46.00	-12.50	-	-	QP
6	962.1623	37.90	1.41	39.31	54.00	-14.69	-	-	QP

802.11a(Worst case)			
Test Channel	5200MHz	Polarity:	Horizontal



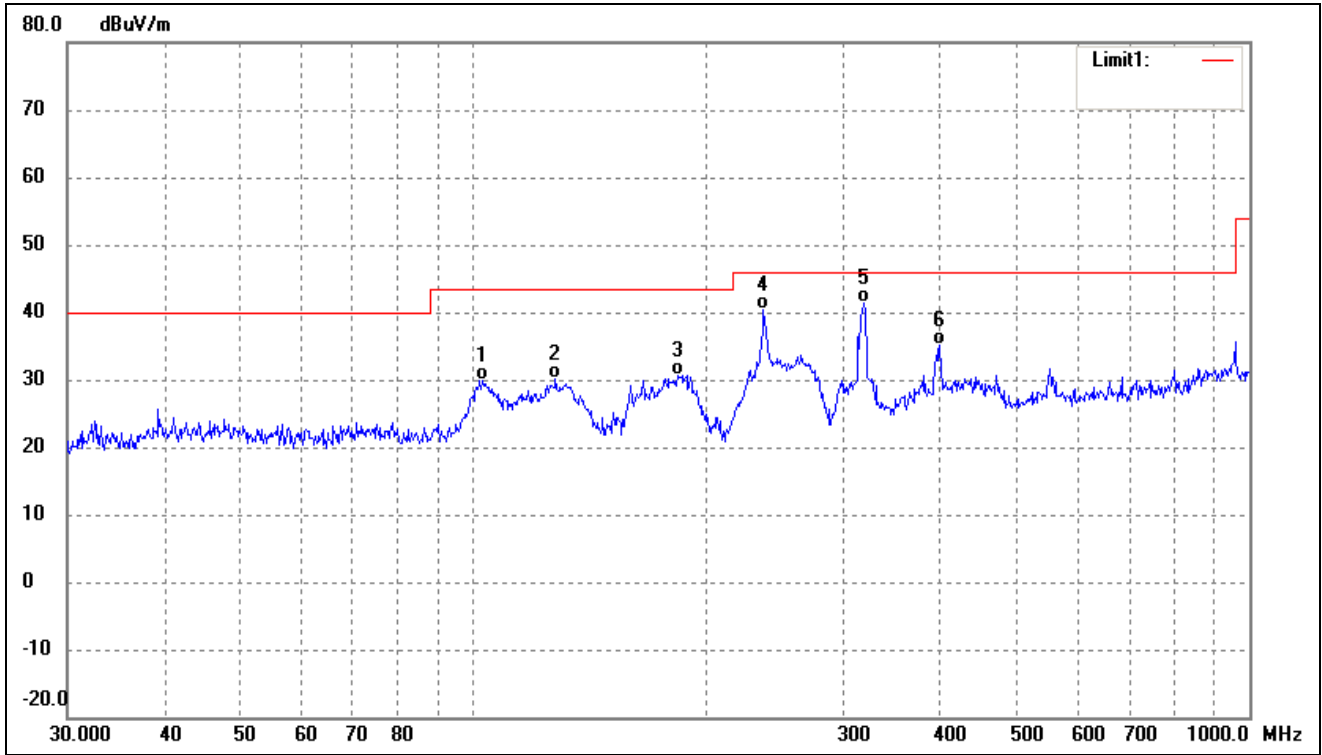
No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	102.0014	43.17	-13.32	29.85	43.50	-13.65	-	-	QP
2	133.6188	46.60	-16.70	29.90	43.50	-13.60	-	-	QP
3	186.4409	44.61	-13.54	31.07	43.50	-12.43	-	-	QP
4	236.6447	51.35	-11.58	39.77	46.00	-6.23	-	-	QP
5	315.4808	49.70	-8.95	40.75	46.00	-5.25	-	-	QP
6	550.9480	34.52	-3.75	30.77	46.00	-15.23	-	-	QP

802.11a(Worst case)			
Test Channel	5200MHz	Polarity:	Vertical



No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	51.3005	37.85	-11.90	25.95	40.00	-14.05	-	-	QP
2	101.2885	44.64	-13.31	31.33	43.50	-12.17	-	-	QP
3	236.6447	41.62	-11.58	30.04	46.00	-15.96	-	-	QP
4	297.2241	42.24	-9.13	33.11	46.00	-12.89	-	-	QP
5	392.0951	41.61	-6.69	34.92	46.00	-11.08	-	-	QP
6	962.1623	36.06	1.41	37.47	54.00	-16.53	-	-	QP

802.11a(Worst case)			
Test Channel	5240MHz	Polarity:	Horizontal



No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	102.7192	43.20	-13.32	29.88	43.50	-13.62	-	-	QP
2	127.6645	46.53	-16.35	30.18	43.50	-13.32	-	-	QP
3	183.2005	44.66	-13.93	30.73	43.50	-12.77	-	-	QP
4	236.6447	52.00	-11.58	40.42	46.00	-5.58	-	-	QP
5	318.8170	50.32	-8.96	41.36	46.00	-4.64	-	-	QP
6	399.0302	41.56	-6.49	35.07	46.00	-10.93	-	-	QP

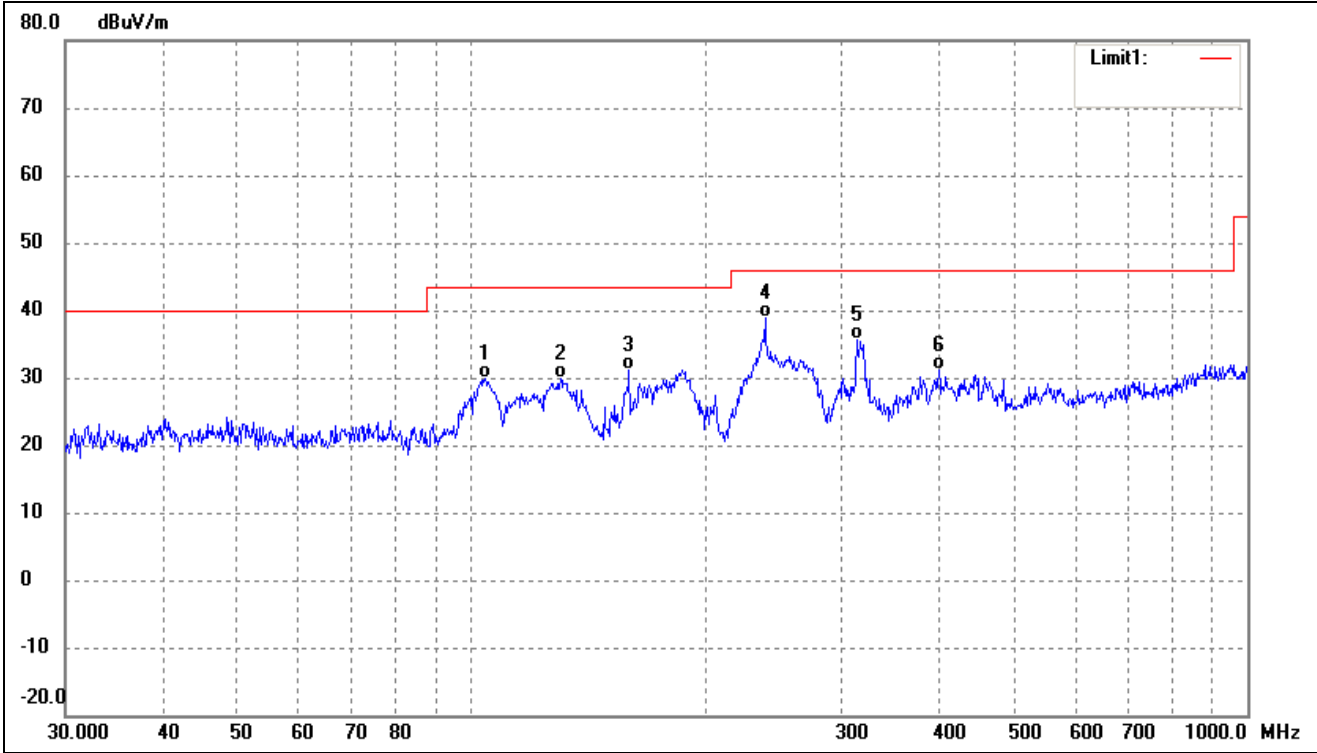
802.11a(Worst case)			
Test Channel	5240MHz	Polarity:	Vertical



No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	78.6888	45.28	-16.60	28.68	40.00	-11.32	-	-	QP
2	102.3597	46.08	-13.31	32.77	43.50	-10.73	-	-	QP
3	235.8164	46.21	-11.62	34.59	46.00	-11.41	-	-	QP
4	396.2415	42.01	-6.57	35.44	46.00	-10.56	-	-	QP
5	787.8513	35.99	-1.19	34.80	46.00	-11.20	-	-	QP
6	962.1623	37.19	1.41	38.60	54.00	-15.40	-	-	QP

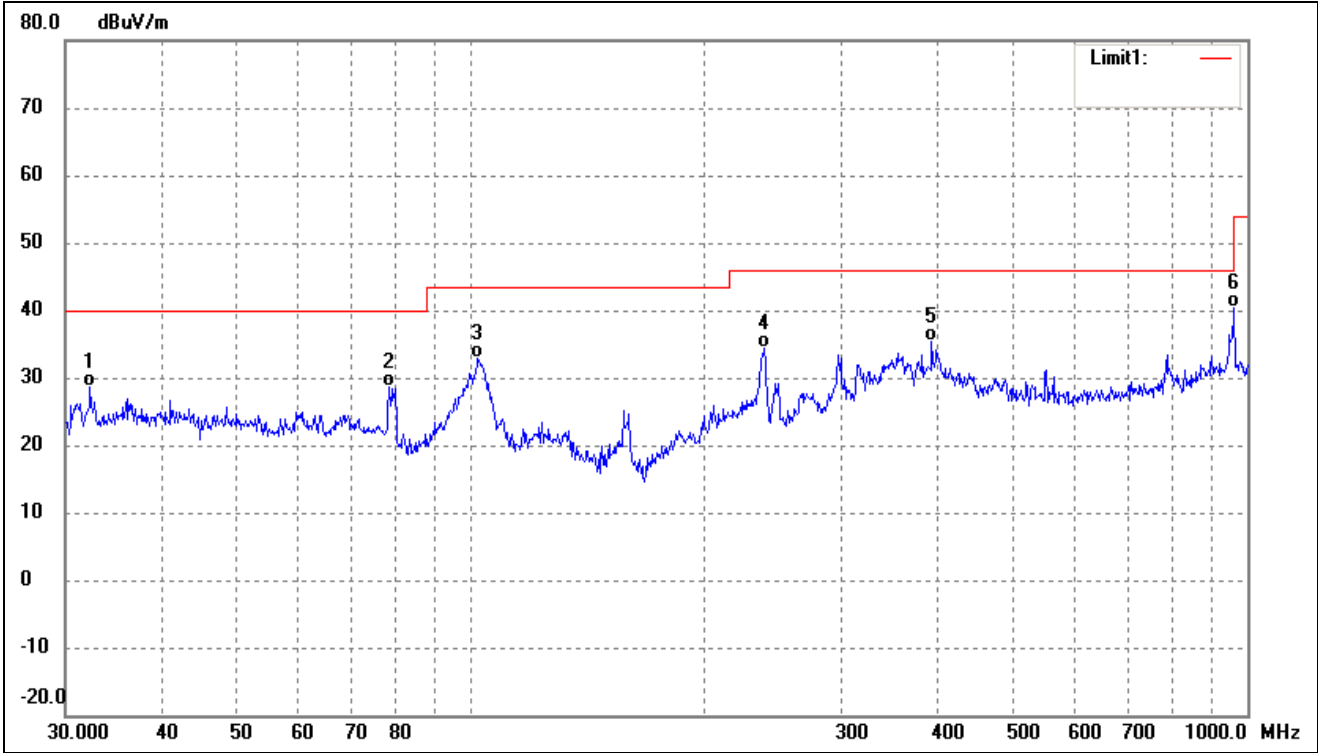
➤ Antenna 0: 5725-5850MHz

802.11a(Worst case)			
Test Channel	5745MHz	Polarity:	Horizontal



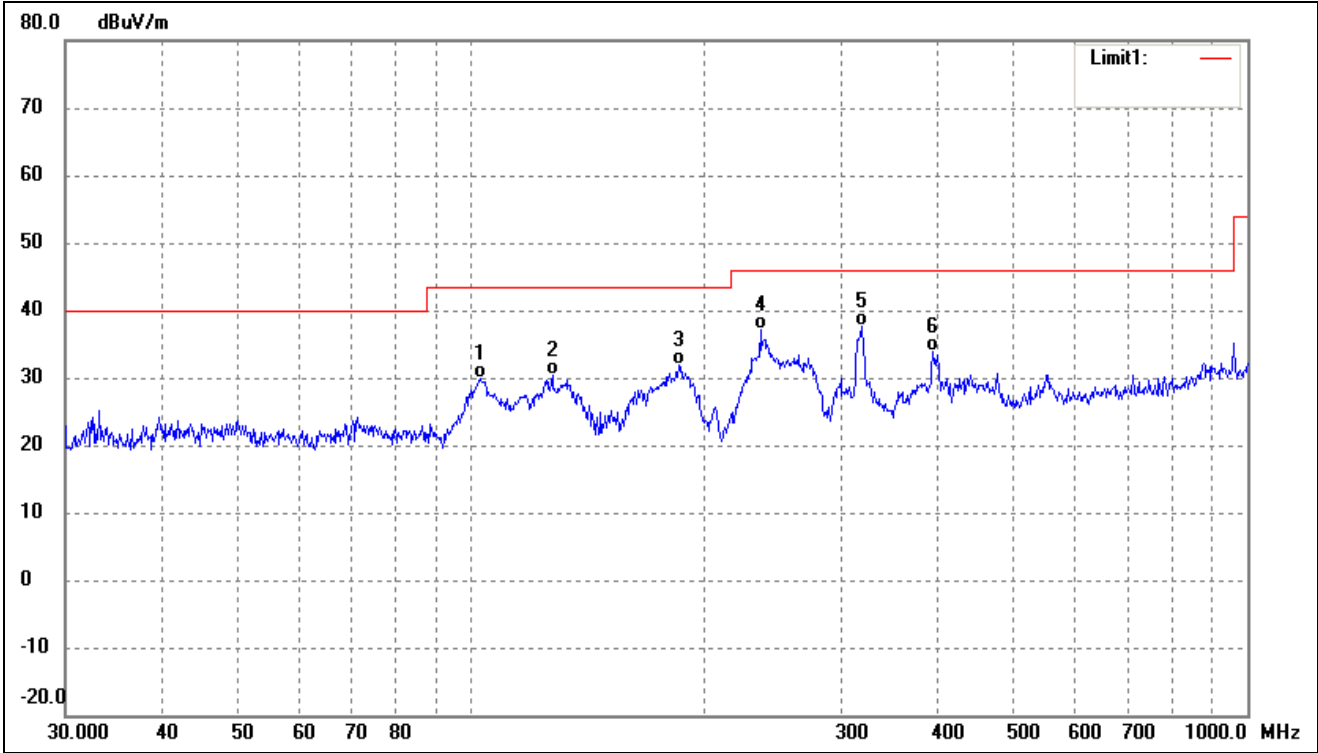
No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	104.1701	43.07	-13.31	29.76	43.50	-13.74	-	-	QP
2	130.3789	46.92	-16.94	29.98	43.50	-13.52	-	-	QP
3	159.7844	46.63	-15.54	31.09	43.50	-12.41	-	-	QP
4	239.1473	50.44	-11.46	38.98	46.00	-7.02	-	-	QP
5	314.3765	44.47	-8.94	35.53	46.00	-10.47	-	-	QP
6	400.4319	37.58	-6.45	31.13	46.00	-14.87	-	-	QP

802.11a(Worst case)			
Test Channel	5745MHz	Polarity:	Vertical



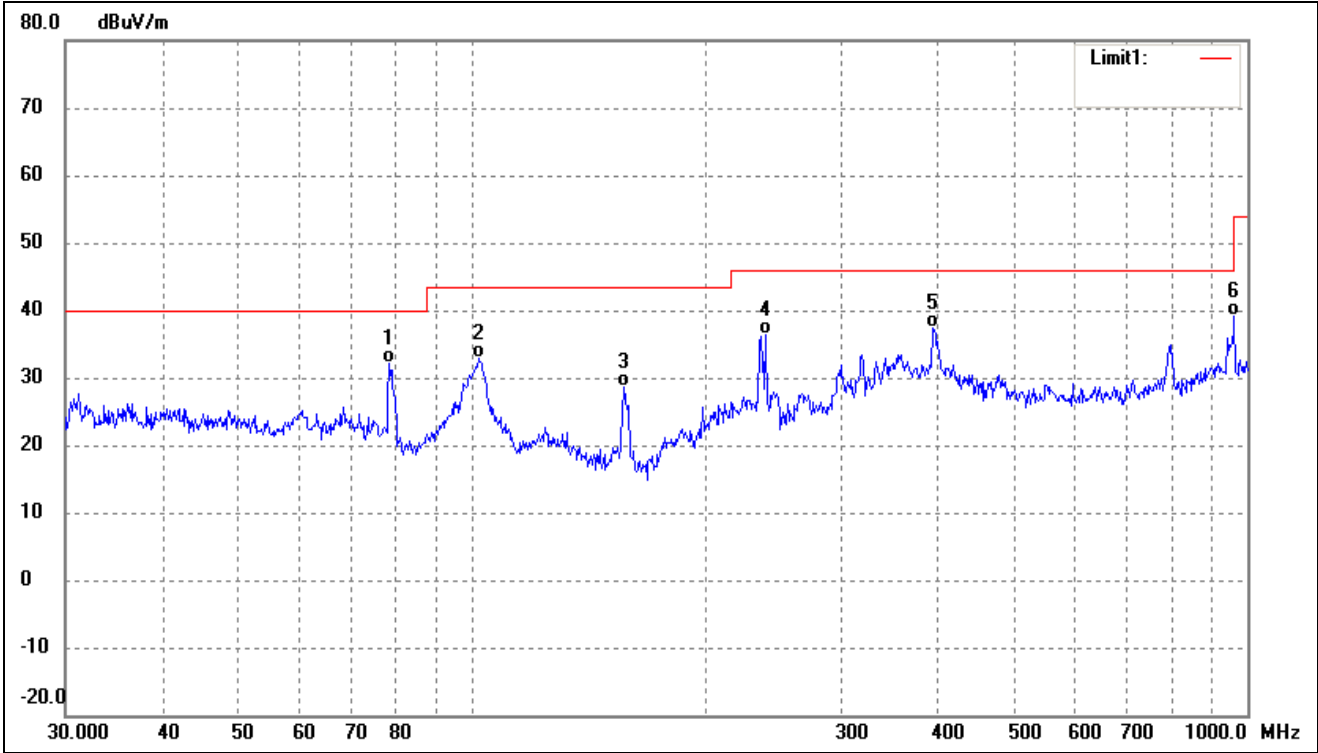
No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	32.2925	42.71	-14.03	28.68	40.00	-11.32	-	-	QP
2	78.4134	45.18	-16.57	28.61	40.00	-11.39	-	-	QP
3	102.0014	46.08	-13.32	32.76	43.50	-10.74	-	-	QP
4	238.3102	45.90	-11.50	34.40	46.00	-11.60	-	-	QP
5	392.0951	42.15	-6.69	35.46	46.00	-10.54	-	-	QP
6	962.1623	38.91	1.41	40.32	54.00	-13.68	-	-	QP

802.11a(Worst case)			
Test Channel	5785MHz	Polarity:	Horizontal



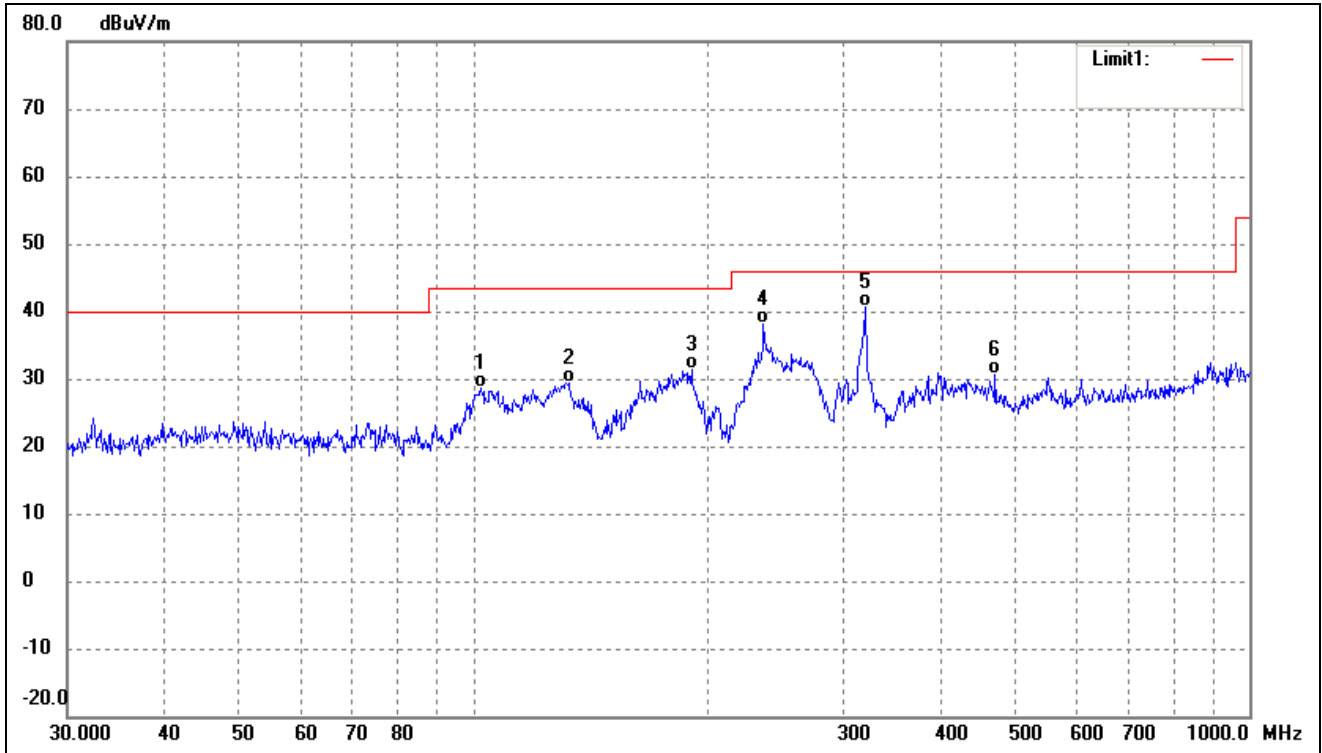
No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	102.7192	43.12	-13.32	29.80	43.50	-13.70	-	-	QP
2	127.2176	46.49	-16.22	30.27	43.50	-13.23	-	-	QP
3	185.1379	45.64	-13.69	31.95	43.50	-11.55	-	-	QP
4	235.8164	48.70	-11.62	37.08	46.00	-8.92	-	-	QP
5	318.8170	46.65	-8.96	37.69	46.00	-8.31	-	-	QP
6	393.4724	40.51	-6.65	33.86	46.00	-12.14	-	-	QP

802.11a(Worst case)			
Test Channel	5785MHz	Polarity:	Vertical



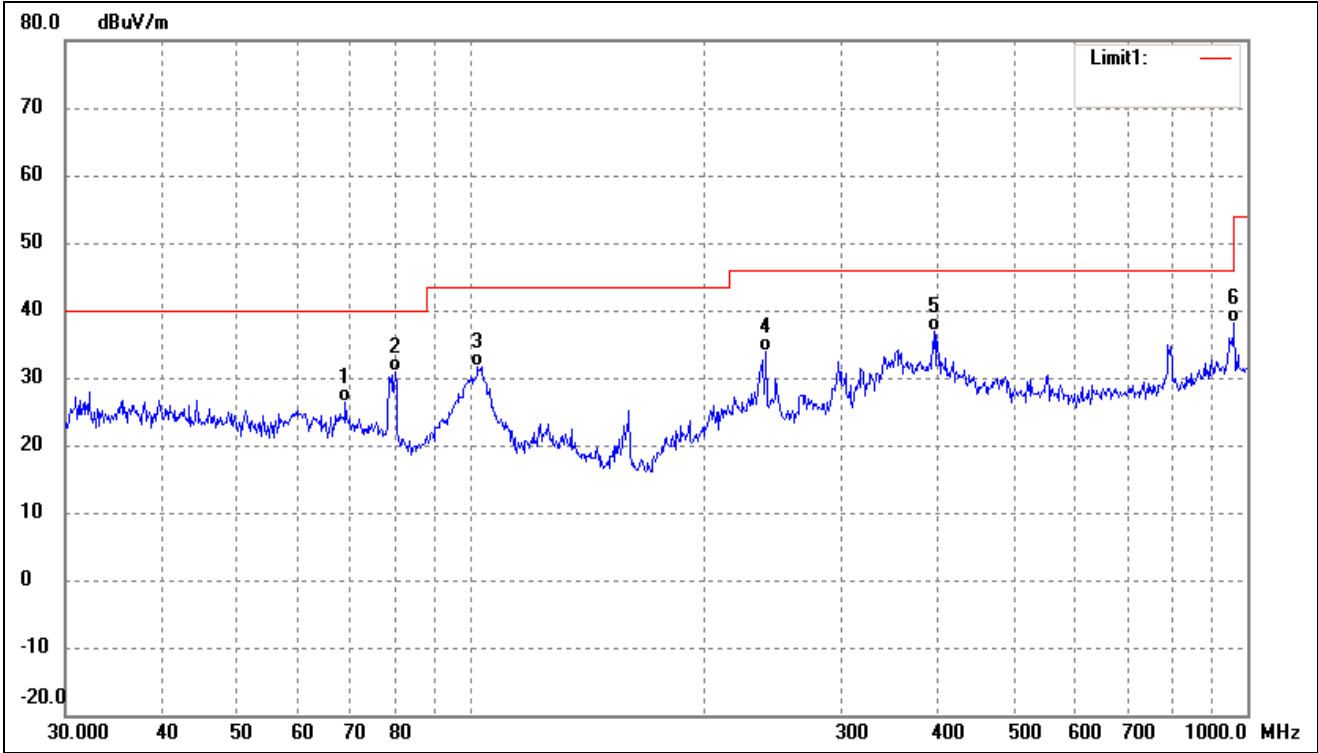
No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	78.4134	48.72	-16.57	32.15	40.00	-7.85	-	-	QP
2	102.3597	46.20	-13.31	32.89	43.50	-10.61	-	-	QP
3	157.5589	44.12	-15.52	28.60	43.50	-14.90	-	-	QP
4	239.1473	47.77	-11.46	36.31	46.00	-9.69	-	-	QP
5	393.4724	44.02	-6.65	37.37	46.00	-8.63	-	-	QP
6	962.1623	37.62	1.41	39.03	54.00	-14.97	-	-	QP

802.11a(Worst case)			
Test Channel	5852MHz	Polarity:	Horizontal



No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	102.3597	41.86	-13.31	28.55	43.50	-14.95	-	-	QP
2	133.1511	46.15	-16.73	29.42	43.50	-14.08	-	-	QP
3	191.0738	44.34	-13.05	31.29	43.50	-12.21	-	-	QP
4	236.6447	49.74	-11.58	38.16	46.00	-7.84	-	-	QP
5	319.9370	49.54	-8.95	40.59	46.00	-5.41	-	-	QP
6	470.5232	35.49	-4.96	30.53	46.00	-15.47	-	-	QP

802.11a(Worst case)			
Test Channel	5825MHz	Polarity:	Vertical

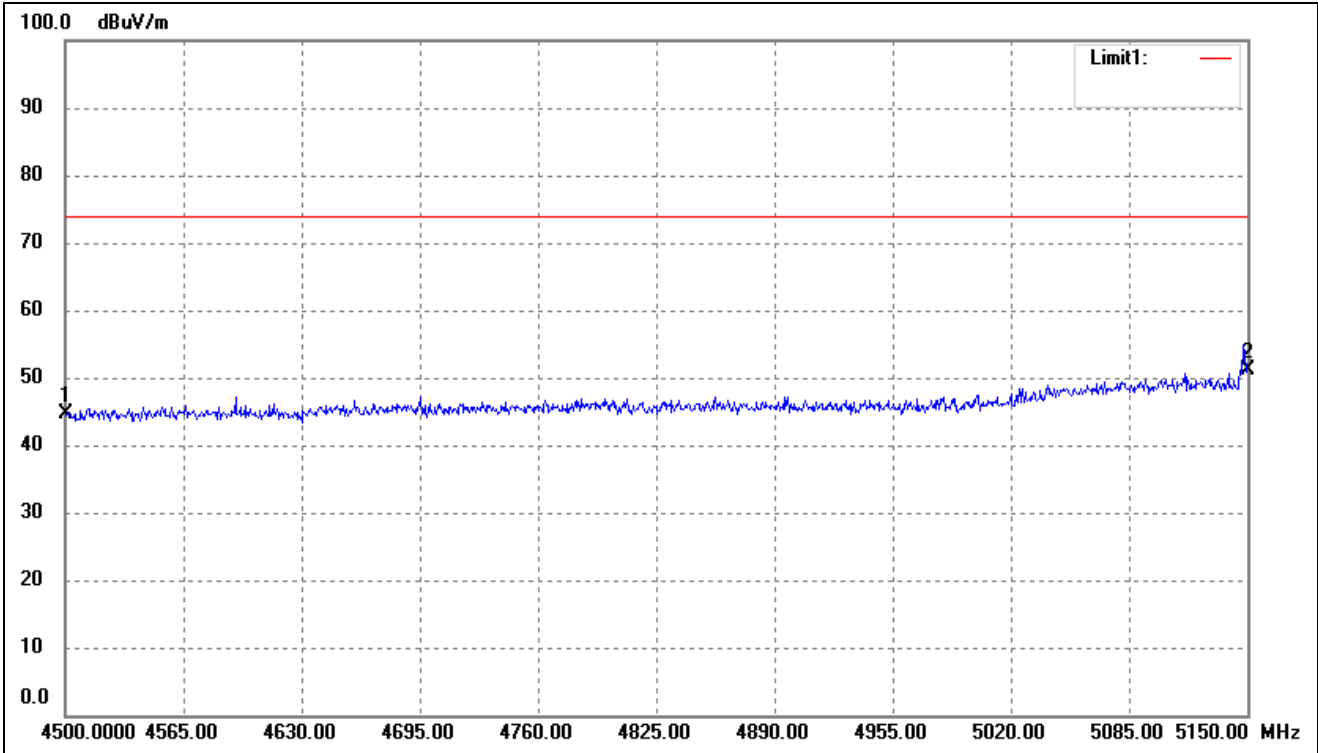


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	68.8721	40.78	-14.47	26.31	40.00	-13.69	-	-	QP
2	79.8003	47.57	-16.77	30.80	40.00	-9.20	-	-	QP
3	102.0014	44.99	-13.32	31.67	43.50	-11.83	-	-	QP
4	239.9874	45.20	-11.42	33.78	46.00	-12.22	-	-	QP
5	394.8545	43.60	-6.61	36.99	46.00	-9.01	-	-	QP
6	962.1623	36.65	1.41	38.06	54.00	-15.94	-	-	QP

Remark: '-' Means' the test Degree and Height are not recorded by the test software and only show the worst case in the test report.

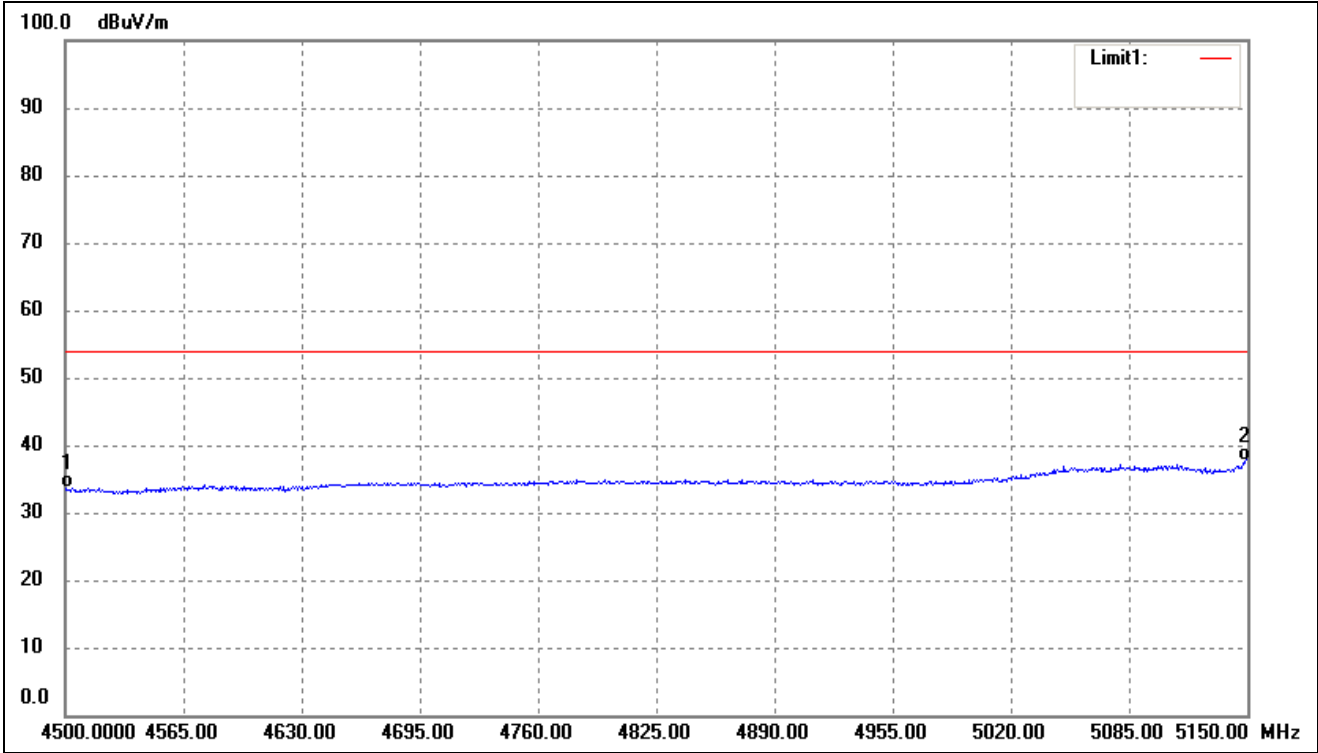
- Spurious Emission above 1GHz
- Antenna 0(worst case)

802.11a- Restricted Bandedge (worst case)			
Test Channel	band 4.50-5.15GHz	Polarity:	Vertical(worst case)



No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	4500.000	49.35	-4.71	44.64	74.00	-29.36	-	-	peak
2	5150.000	55.41	-4.32	51.09	74.00	-22.91	-	-	peak

802.11a- Restricted Bandedge (worst case)			
Test Channel	band 4.50-5.15GHz	Polarity:	Vertical(worst case)



No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	4500.000	38.31	-4.71	33.60	54.00	-20.40	-	-	AVG
2	5150.000	41.97	-4.32	37.65	54.00	-16.35	-	-	AVG

Note: The Restricted Bandedge was tested in Horizontal /Vertical and the worst case position data was reported.

Remark: ‘-’Means’ the test Degree and Height is not recorded by the test software and only show the worst case in the test report.

- Antenna 0(worst case)
- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11a)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5180MHz)							
10360	56.86	7.11	63.97	74	-10.03	H	PK
15540	38.25	8.22	46.47	54	-7.53	H	AV
10360	57.45	7.11	64.56	74	-9.44	V	PK
15540	37.59	8.22	45.81	54	-8.19	V	AV
Middle Channel (5200MHz)							
10400	56.79	7.22	64.01	74	-9.99	H	PK
15600	37.02	8.67	45.69	54	-8.31	H	AV
10400	57.15	7.22	64.37	74	-9.63	V	PK
15600	36.75	8.67	45.42	54	-8.58	V	AV
High Channel (5240MHz)							
10480	55.93	7.69	63.62	74	-10.38	H	PK
15720	37.86	8.93	46.79	54	-7.21	H	AV
10360	56.86	7.11	63.97	74	-10.03	V	PK
15540	38.25	8.22	46.47	54	-7.53	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5745MHz)							
11490	54.51	9.45	63.96	74	-10.04	H	PK
17235	33.43	10.36	43.79	54	-10.21	H	AV
11490	56.70	9.45	66.15	74	-7.85	V	PK
17235	35.77	10.36	46.13	54	-7.87	V	AV
Middle Channel (5785MHz)							
11570	58.70	9.62	68.32	74	-5.68	H	PK
17355	38.04	10.67	48.71	54	-5.29	H	AV
11570	56.08	9.62	65.70	74	-8.30	V	PK
17355	31.32	10.67	41.99	54	-12.01	V	AV
High Channel (5825MHz)							
11650	57.55	9.84	67.39	74	-6.61	H	PK
17475	35.25	10.95	46.20	54	-7.80	H	AV
11650	55.52	9.84	65.36	74	-8.64	V	PK
17475	36.17	10.95	47.12	54	-6.88	V	AV

➤ Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-40.85	-27
Highest	Above 5350	-41.82	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-37.55	-27
	5715 to 5725	-38.68	-17
Highest	5850 to 5860	-36.43	-17
	Above 5860	-47.11	-27
Note: the data just list the worst cases			

- For the frequency band 5.15-5.25GHz5.725-5.850GHz (802.11n HT20)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5180MHz)							
10360	58.21	7.11	65.32	74	-8.68	H	PK
15540	35.32	8.22	43.54	54	-10.46	H	AV
10360	59.48	7.11	66.59	74	-7.41	V	PK
15540	33.47	8.22	41.69	54	-12.31	V	AV
Middle Channel (5200MHz)							
10400	57.91	7.22	65.13	74	-8.87	H	PK
15600	36.30	8.67	44.97	54	-9.03	H	AV
10400	55.24	7.22	62.46	74	-11.54	V	PK
15600	36.17	8.67	44.84	54	-9.16	V	AV
High Channel (5240MHz)							
10480	55.82	7.69	63.51	74	-10.49	H	PK
15720	38.33	8.93	47.26	54	-6.74	H	AV
10480	60.55	7.69	68.24	74	-5.76	V	PK
15720	38.64	8.93	47.57	54	-6.43	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5745MHz)							
11490	60.28	9.45	69.73	74	-4.27	H	PK
17235	38.50	10.36	48.86	54	-5.14	H	AV
11490	56.52	9.45	65.97	74	-8.03	V	PK
17235	35.98	10.36	46.34	54	-7.66	V	AV
Middle Channel (5785MHz)							
11570	55.97	9.62	65.59	74	-8.41	H	PK
17355	32.82	10.67	43.49	54	-10.51	H	AV
11570	58.52	9.62	68.14	74	-5.86	V	PK
17355	34.35	10.67	45.02	54	-8.98	V	AV
High Channel (5825MHz)							
11650	52.82	9.84	62.66	74	-11.34	H	PK
17475	32.91	10.95	43.86	54	-10.14	H	AV
11650	58.44	9.84	68.28	74	-5.72	V	PK
17475	34.53	10.95	45.48	54	-8.52	V	AV

➤ Out of Band edge 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-31.87	-27
Highest	Above 5350	-40.16	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-42.34	-27
	5715 to 5725	-33.95	-17
Highest	5850 to 5860	-38.00	-17
	Above 5860	-42.28	-27
Note: the data just list the worst cases			

- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11n HT40)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5190MHz)							
10380	57.40	7.25	64.65	74	-9.35	H	PK
15570	36.52	8.33	44.85	54	-9.15	H	AV
10380	60.90	7.25	68.15	74	-5.85	V	PK
15570	39.44	8.33	47.77	54	-6.23	V	AV
High Channel (5230MHz)							
10460	57.21	7.54	64.75	74	-9.25	H	PK
15690	36.07	8.86	44.93	54	-9.07	H	AV
10460	59.99	7.54	67.53	74	-6.47	V	PK
15690	34.29	8.86	43.15	54	-10.85	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5755MHz)							
11510	56.46	9.65	66.11	74	-7.89	H	PK
17265	37.58	10.87	48.45	54	-5.55	H	AV
11510	54.98	9.65	64.63	74	-9.37	V	PK
17265	35.22	10.87	46.09	54	-7.91	V	AV
High Channel (5795MHz)							
11590	54.48	9.81	64.29	74	-9.71	H	PK
17385	31.51	10.89	42.40	54	-11.60	H	AV
11590	56.72	9.81	66.53	74	-7.47	V	PK
17385	35.30	10.89	46.19	54	-7.81	V	AV

- Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-35.72	-27
Highest	Above 5350	-41.77	-27

Note: the data just list the worst cases

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-42.93	-27
	5715 to 5725	-39.78	-17
Highest	5850 to 5860	-41.27	-17
	Above 5860	-45.31	-27

Note: the data just list the worst cases

- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11ac VH80)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
5210MHz							
10420	58.26	7.33	65.59	74	-8.41	H	PK
15630	35.91	8.75	44.66	54	-9.34	H	AV
10420	54.42	7.33	61.75	74	-12.25	H	PK
15630	36.22	8.75	44.97	54	-9.03	H	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
5775MHz							
11550	53.62	9.54	63.16	74	-10.84	H	PK
17325	37.42	10.59	48.01	54	-5.99	H	AV
11550	54.12	9.54	63.66	74	-10.34	H	PK
17325	34.21	10.59	44.80	54	-9.20	H	AV

- Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-35.48	-27
Highest	Above 5350	-33.04	-27

Note: the data just list the worst cases

- Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-44.41	-27
	5715 to 5725	-28.69	-17
Highest	5850 to 5860	-25.87	-17
	Above 5860	-38.43	-27

Note: the data just list the worst cases

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

9. Frequency Stability

9.1 Standard Applicable

According to §15.407(g), manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

9.2 Test Procedure

According to §2.1055, the following test procedure was performed.

The Frequency Stability is measured directly with a Frequency Domain Analyzer. Frequency Deviation in ppm is calculated from the measured peak to peak value.

The Carrier Frequency Stability over Power Supply Voltage and over Temperature is measured with a Frequency Domain Analyzer in histogram mode.

9.3 Summary of Test Results/Plots

Please refer to Appendix D

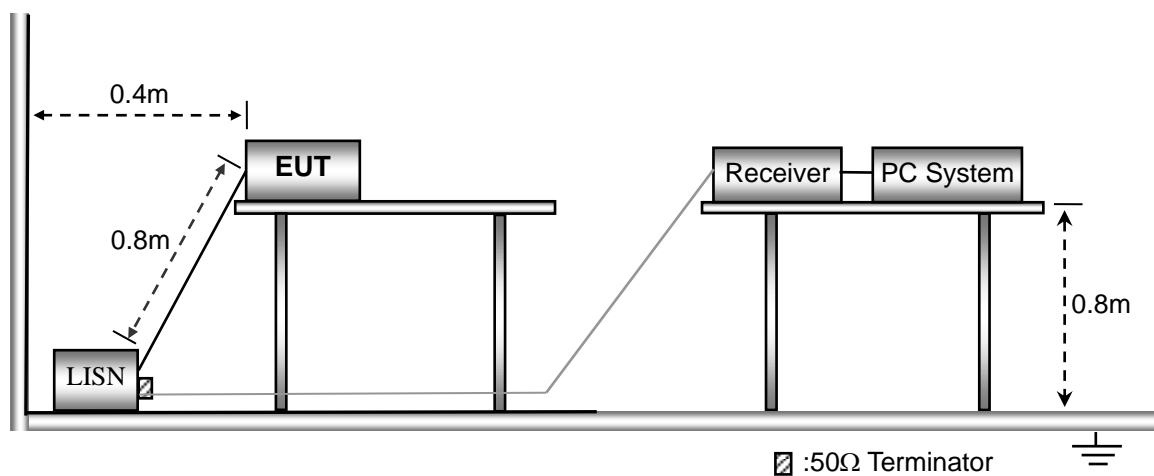
10 Conducted Emissions

10.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

10.2 Basic Test Setup Block Diagram



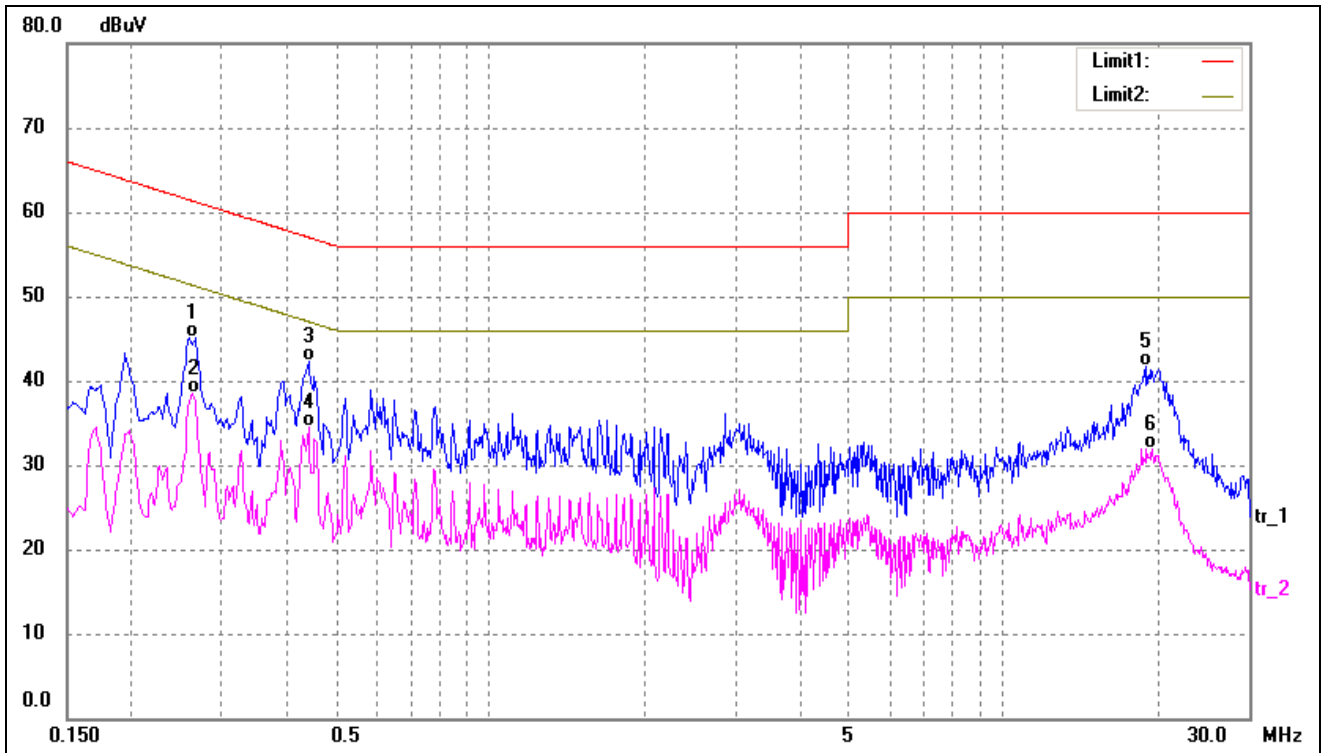
10.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency	150 kHz
Stop Frequency	30 MHz
Sweep Speed	Auto
IF Bandwidth.....	10 kHz
Quasi-Peak Adapter Bandwidth	9 kHz
Quasi-Peak Adapter Mode	Normal

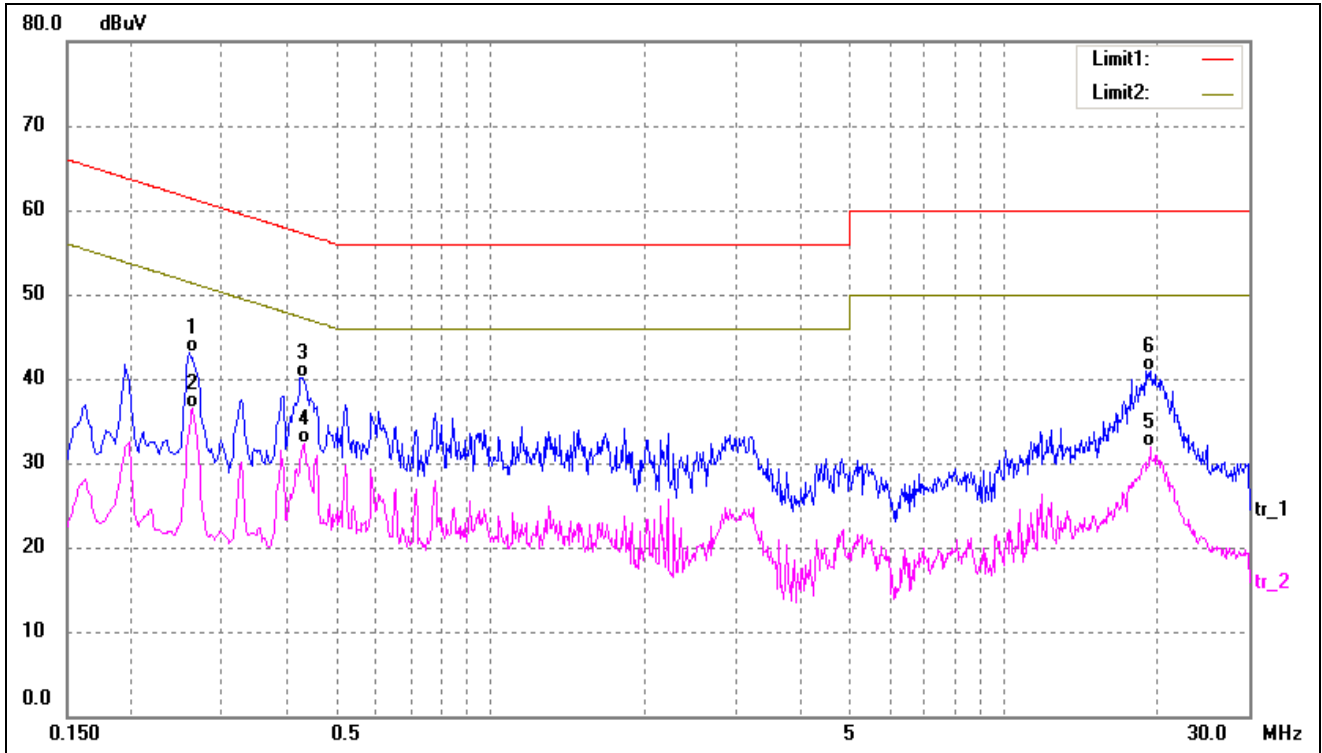
10.4 Summary of Test Results/Plots

Test Mode	Communication	AC120V 60Hz	Polarity:	Neutral
-----------	---------------	-------------	-----------	---------



No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2580	34.83	10.26	45.09	61.50	-16.41	QP
2	0.2620	28.20	10.26	38.46	51.37	-12.91	AVG
3	0.4420	32.05	10.22	42.27	57.02	-14.75	QP
4*	0.4420	24.32	10.22	34.54	47.02	-12.48	AVG
5	18.9940	31.03	10.59	41.62	60.00	-18.38	QP
6	19.5140	21.33	10.59	31.92	50.00	-18.08	AVG

Test Mode	Communication	AC120V 60Hz	Polarity:	Line
-----------	---------------	-------------	-----------	------



No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2580	32.81	10.26	43.07	61.50	-18.43	QP
2	0.2620	26.21	10.26	36.47	51.37	-14.90	AVG
3	0.4260	29.87	10.22	40.09	57.33	-17.24	QP
4*	0.4340	22.10	10.22	32.32	47.18	-14.86	AVG
5	19.2820	21.35	10.59	31.94	50.00	-18.06	AVG
6	19.4140	30.38	10.59	40.97	60.00	-19.03	QP

APPENDIX SUMMARY

Project No.	WTH21X05044788W	Test Engineer	MooN
Start date	2021/05/19	Finish date	2021/05/21
Temperature	23.8℃	Humidity	47%
RF specifications	U-NII		

APPENDIX	Description of Test Item	Result
A	Power Spectral Density	Compliant
B	Emission Bandwidth and Occupied Bandwidth	Compliant
C	Maximum Conducted Output Power	Compliant
D	Frequency Stability	Compliant

APPENDIX A

Power Spectral Density					
U-NII-1:5150-5250MHz					
Operating mode	Test Channel	ANT 0 dBm/MHz	ANT 1 dBm/MHz	Total dBm/MHz	Limit (dBm/MHz)
802.11a	5180	4.702	5.357	/	11
	5200	5.080	5.164	/	11
	5240	5.182	5.428	/	11
802.11n-HT20	5180	4.506	4.597	7.56	11
	5200	4.376	4.351	7.37	11
	5240	4.502	4.766	7.65	11
802.11n-HT40	5190	0.180	0.476	3.34	11
	5230	0.211	0.683	3.46	11
802.11ac-HT80	5210	0.711	1.254	4.00	11

Power Spectral Density							
U-NII-3: 5725-5850MHz							
Operating mode	Test Channel	ANT 0 dBm/300kHz	ANT 1 dBm/300kHz	Factor	ANT 0 dBm/500kHz*	ANT 1 dBm/500kHz*	Limit dBm/500kHz
802.11a	5745	0.579	0.372	2.22	2.799	2.592	30
	5785	0.606	0.680	2.22	2.826	2.900	30
	5825	0.779	1.232	2.22	2.999	3.452	30

*Note: Maximum PSD=PSD(dBm/300kHz)+10log(500kHz/300kHz)=2.22

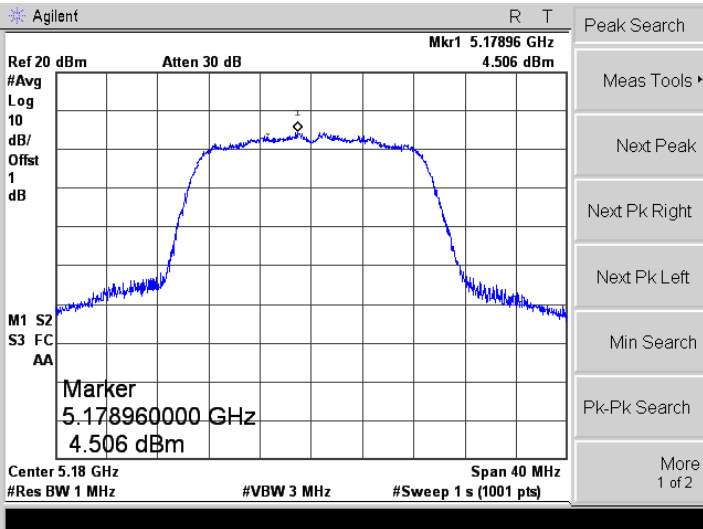
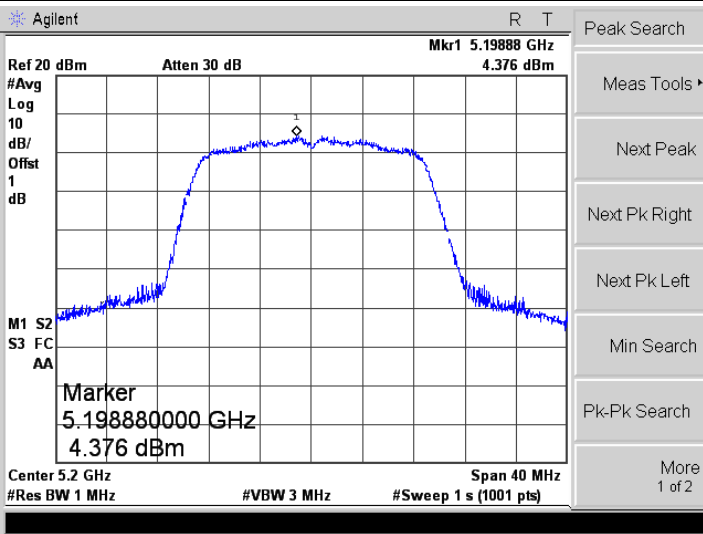
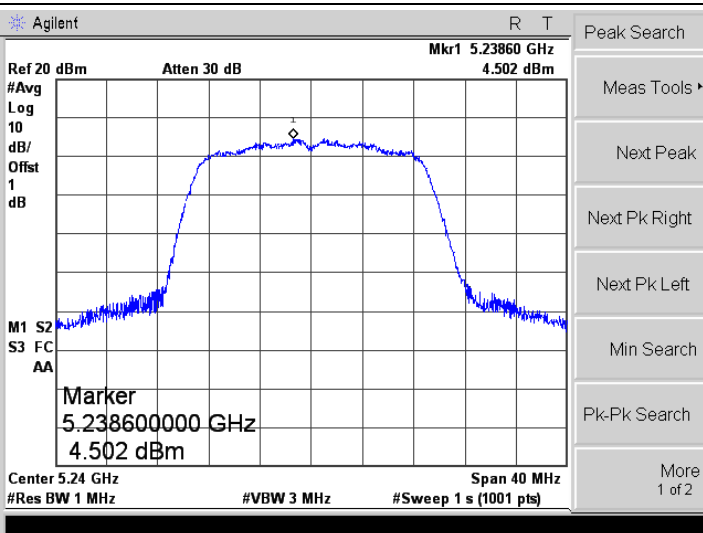
Power Spectral Density							
U-NII-3: 5725-5850MHz							
Operating mode	Test Channel	ANT 0 dBm/300kHz	ANT 1 dBm/300kHz	Factor	Total dBm/500kHz*	Limit dBm/500kHz	
802.11n-HT20	5745	-0.572	-0.438	2.22	4.730	30	
	5785	-0.578	-0.265	2.22	4.810	30	
	5825	-0.794	-0.214	2.22	4.740	30	
802.11n HT40	5755	-4.539	-4.304	2.22	0.810	30	
	5795	-4.421	-4.048	2.22	1.000	30	
802.11ac VH80	5775	-3.496	-3.305	2.22	1.830	30	

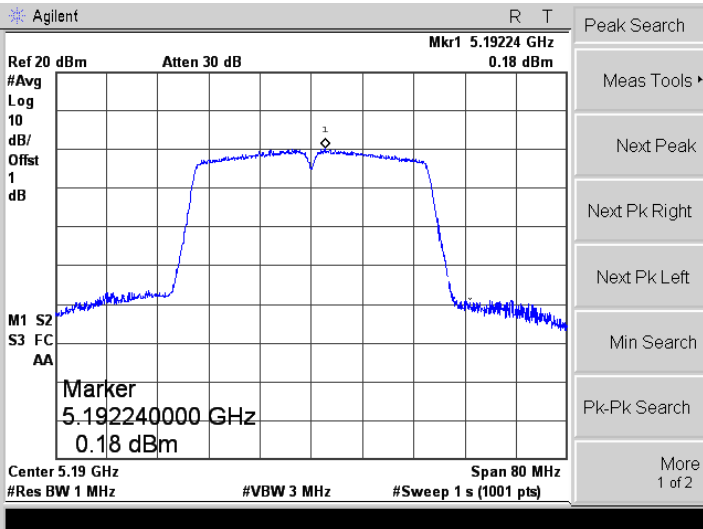
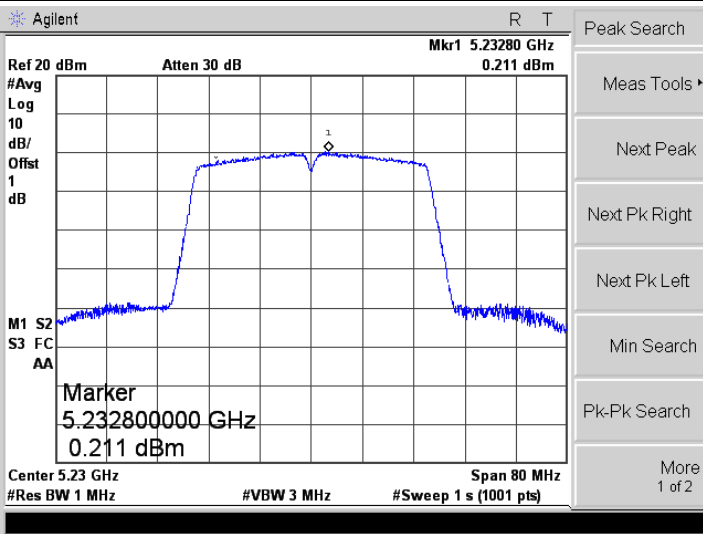
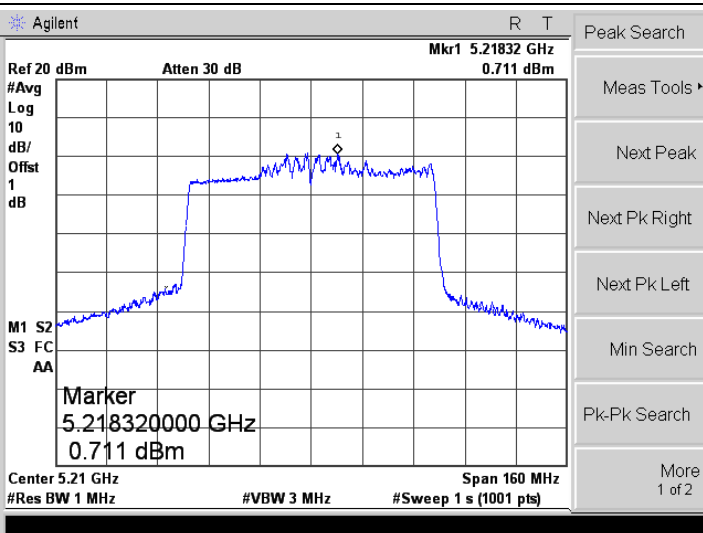
*Note: Maximum PSD=PSD(dBm/300kHz)+10log(500kHz/300kHz)=2.22

ANT 0

5150-5250MHz

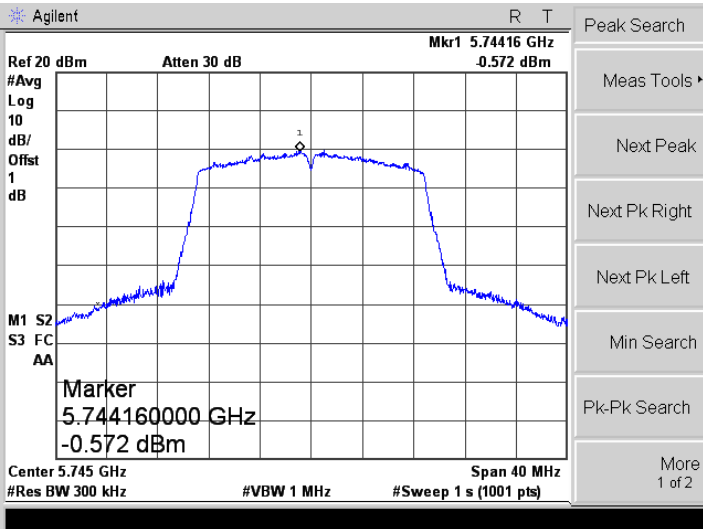
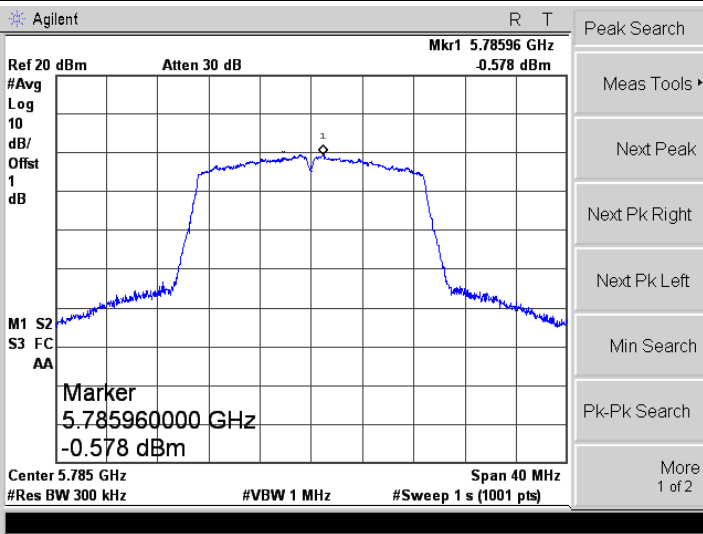
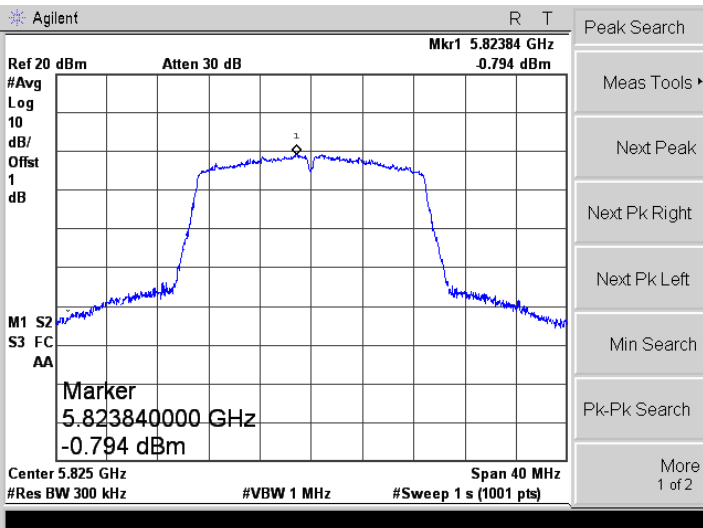
<p>802.11a-Low</p>	<p>Agilent R T Ref 20 dBm Atten 30 dB Mkr1 5.18092 GHz 4.702 dBm #Avg 10 Log dB/Offst 1 dB M1 S2 S3 FC AA Marker 5.180920000 GHz 4.702 dBm Center 5.18 GHz Span 40 MHz #Res BW 1 MHz #VBW 3 MHz #Sweep 1 s (1001 pts)</p>
<p>802.11a-Middle</p>	<p>Agilent R T Ref 20 dBm Atten 30 dB Mkr1 5.20172 GHz 5.08 dBm #Avg 10 Log dB/Offst 1 dB M1 S2 S3 FC AA Marker 5.201720000 GHz 5.08 dBm Center 5.2 GHz Span 40 MHz #Res BW 1 MHz #VBW 3 MHz #Sweep 1 s (1001 pts)</p>
<p>802.11a-High</p>	<p>Agilent R T Ref 20 dBm Atten 30 dB Mkr1 5.24220 GHz 5.182 dBm #Avg 10 Log dB/Offst 1 dB M1 S2 S3 FC AA Marker 5.242200000 GHz 5.182 dBm Center 5.24 GHz Span 40 MHz #Res BW 1 MHz #VBW 3 MHz #Sweep 1 s (1001 pts)</p>

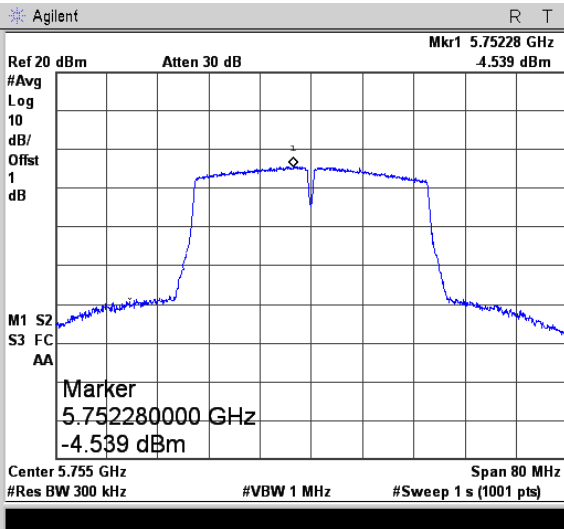
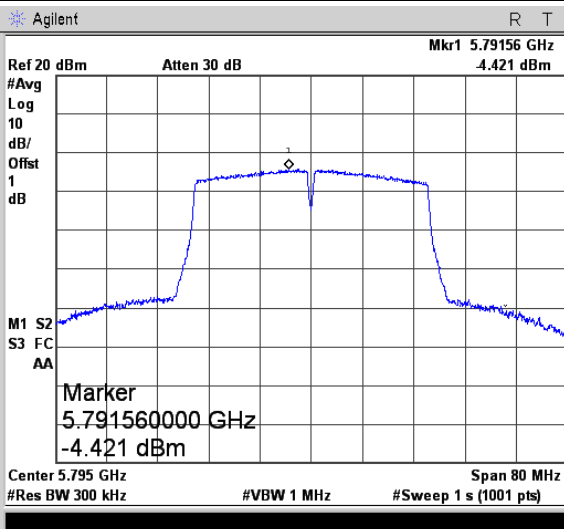
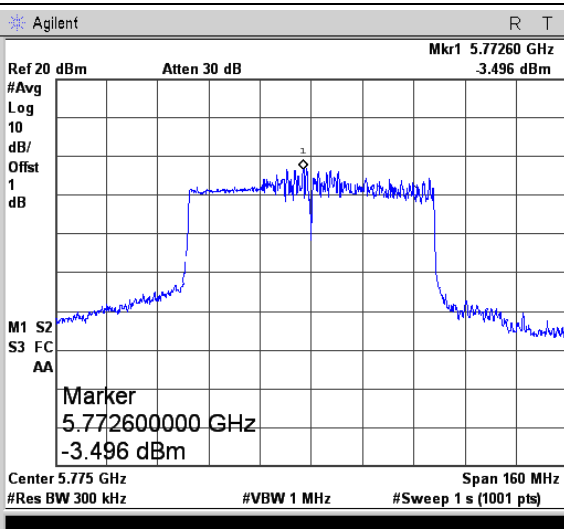
<p>802.11n-HT20-Low</p>	
<p>802.11n-HT20-Middle</p>	
<p>802.11n-HT20-High</p>	

<p>802.11n-HT40-Low</p>	
<p>802.11n-HT40-High</p>	
<p>802.11ac-HT80</p>	

5725-5850MHz

<p>802.11a-Low</p>	<p>Agilent R T</p> <p>Ref 20 dBm Atten 30 dB Mkr1 5.74432 GHz 0.579 dBm</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>M1 S2 S3 FC AA</p> <p>Marker 5.744320000 GHz 0.579 dBm</p> <p>Center 5.745 GHz Span 40 MHz #Res BW 300 kHz #VBW 1 MHz #Sweep 1 s (1001 pts)</p> <p>Peak Search Meas Tools ▾ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2</p>
<p>802.11a-Middle</p>	<p>Agilent R T</p> <p>Ref 20 dBm Atten 30 dB Mkr1 5.78548 GHz 0.606 dBm</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>M1 S2 S3 FC AA</p> <p>Marker 5.785480000 GHz 0.606 dBm</p> <p>Center 5.785 GHz Span 40 MHz #Res BW 300 kHz #VBW 1 MHz #Sweep 1 s (1001 pts)</p> <p>Peak Search Meas Tools ▾ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2</p>
<p>802.11a-High</p>	<p>Agilent R T</p> <p>Ref 20 dBm Atten 30 dB Mkr1 5.82460 GHz 0.779 dBm</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>M1 S2 S3 FC AA</p> <p>Marker 5.824600000 GHz 0.779 dBm</p> <p>Center 5.825 GHz Span 40 MHz #Res BW 300 kHz #VBW 1 MHz #Sweep 1 s (1001 pts)</p> <p>Peak Search Meas Tools ▾ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2</p>

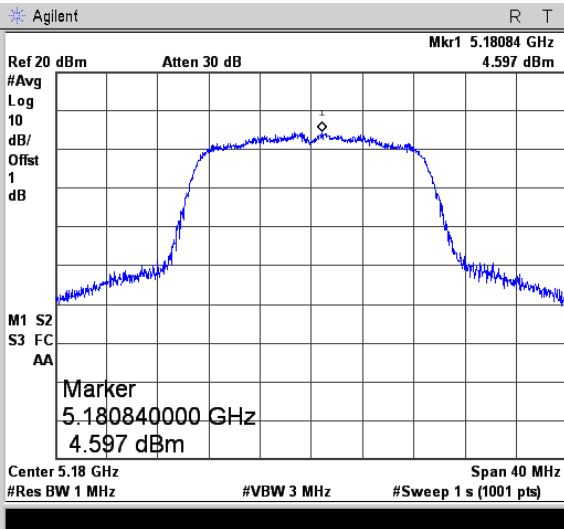
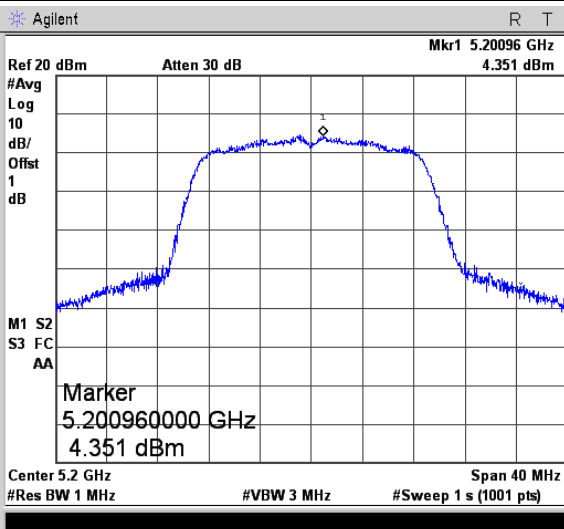
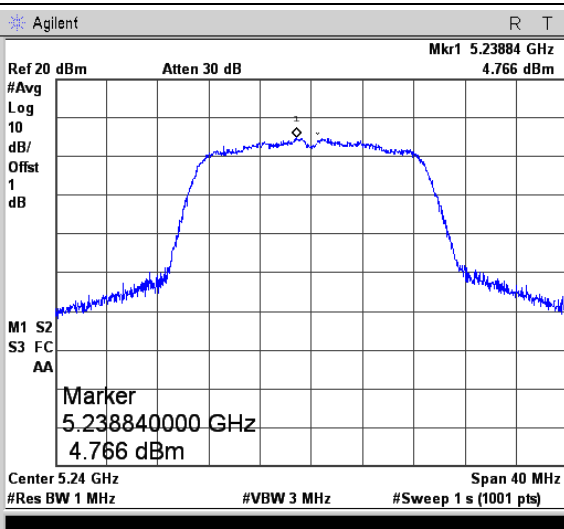
<p>802.11n-HT20-Low</p>	
<p>802.11n-HT20-Middle</p>	
<p>802.11n-HT20-High</p>	

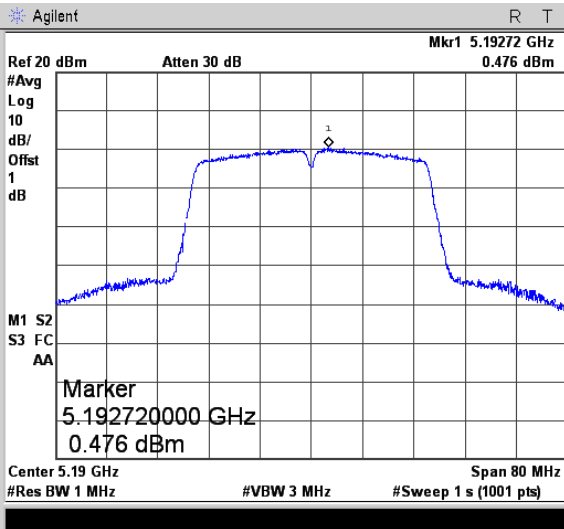
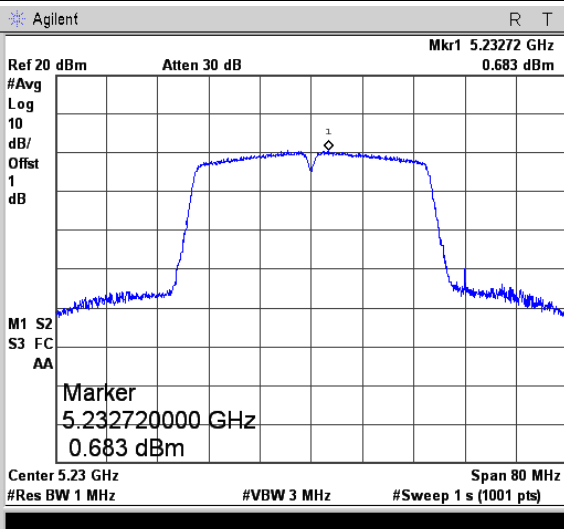
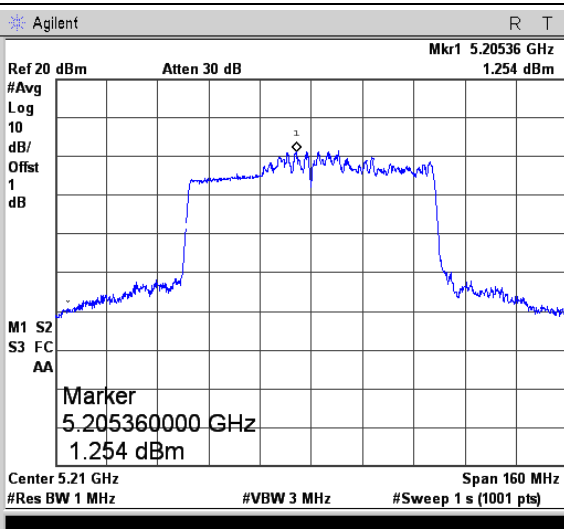
<p>802.11n-HT40-Low</p>	 <p>Agilent R T Ref 20 dBm Atten 30 dB Mkr1 5.75228 GHz 4.539 dBm #Avg 10 Log dB/ Offst 1 dB M1 S2 S3 FC AA Marker 5.752280000 GHz -4.539 dBm Center 5.755 GHz Span 80 MHz #Res BW 300 kHz #VBW 1 MHz #Sweep 1 s (1001 pts)</p>
<p>802.11n-HT40-High</p>	 <p>Agilent R T Ref 20 dBm Atten 30 dB Mkr1 5.79156 GHz 4.421 dBm #Avg 10 Log dB/ Offst 1 dB M1 S2 S3 FC AA Marker 5.791560000 GHz -4.421 dBm Center 5.795 GHz Span 80 MHz #Res BW 300 kHz #VBW 1 MHz #Sweep 1 s (1001 pts)</p>
<p>802.11ac-HT80</p>	 <p>Agilent R T Ref 20 dBm Atten 30 dB Mkr1 5.77260 GHz 3.496 dBm #Avg 10 Log dB/ Offst 1 dB M1 S2 S3 FC AA Marker 5.772600000 GHz -3.496 dBm Center 5.775 GHz Span 160 MHz #Res BW 300 kHz #VBW 1 MHz #Sweep 1 s (1001 pts)</p>

ANT 1

5150-5250MHz

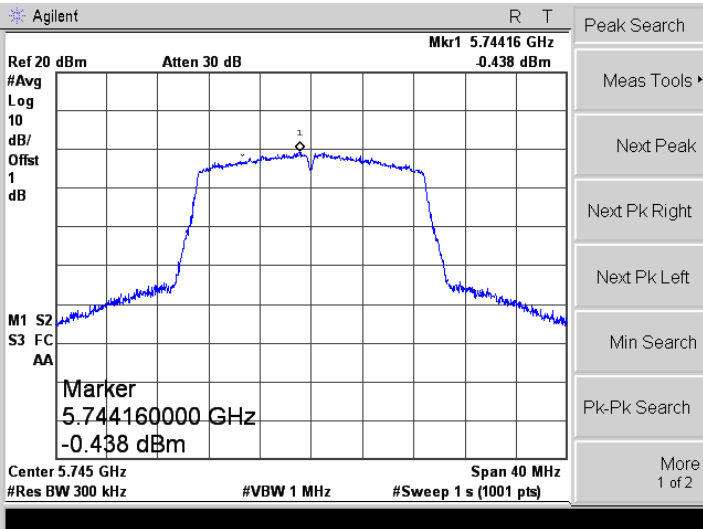
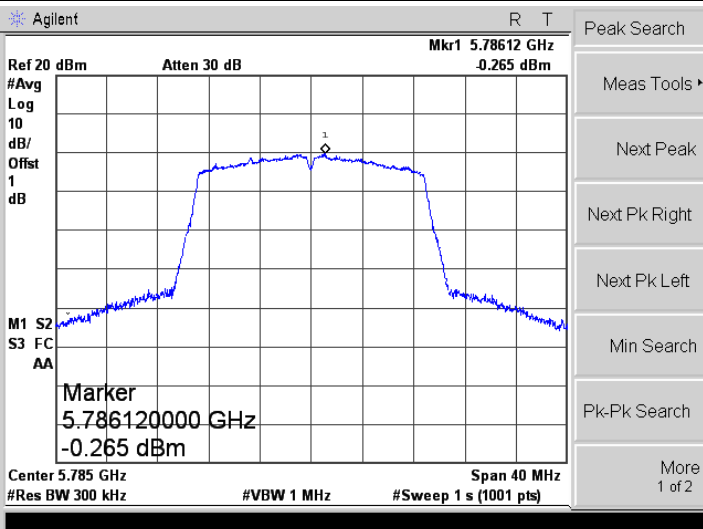
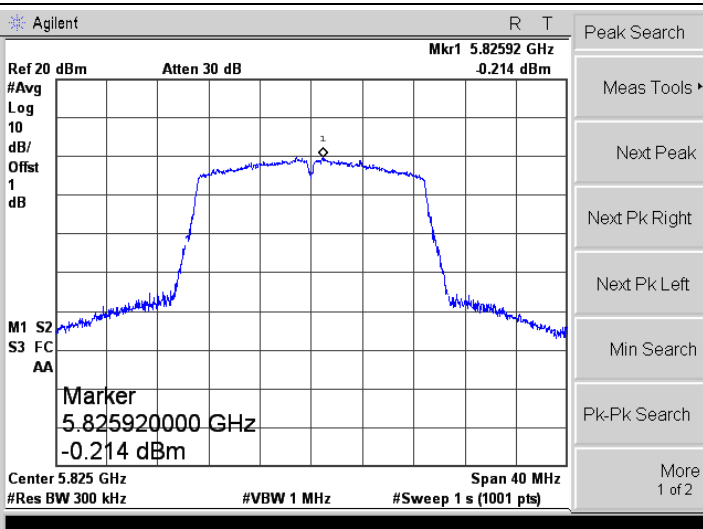
<p>802.11a-Low</p>	<p>Agilent R T</p> <p>Ref 20 dBm Atten 30 dB Mkr1 5.17784 GHz 5.357 dBm</p> <p>#Avg Log 10 dB/Offst 1 dB</p> <p>M1 S2 S3 FC AA</p> <p>Marker 5.177840000 GHz 5.357 dBm</p> <p>Center 5.18 GHz Span 40 MHz #Res BW 1 MHz #VBW 3 MHz #Sweep 1 s (1001 pts)</p> <p>Peak Search Meas Tools Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2</p>
<p>802.11a-Middle</p>	<p>Agilent R T</p> <p>Ref 20 dBm Atten 30 dB Mkr1 5.20112 GHz 5.164 dBm</p> <p>#Avg Log 10 dB/Offst 1 dB</p> <p>M1 S2 S3 FC AA</p> <p>Marker 5.201120000 GHz 5.164 dBm</p> <p>Center 5.2 GHz Span 40 MHz #Res BW 1 MHz #VBW 3 MHz #Sweep 1 s (1001 pts)</p> <p>Peak Search Meas Tools Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2</p>
<p>802.11a-High</p>	<p>Agilent R T</p> <p>Ref 20 dBm Atten 30 dB Mkr1 5.24164 GHz 5.428 dBm</p> <p>#Avg Log 10 dB/Offst 1 dB</p> <p>M1 S2 S3 FC AA</p> <p>Marker 5.241640000 GHz 5.428 dBm</p> <p>Center 5.24 GHz Span 40 MHz #Res BW 1 MHz #VBW 3 MHz #Sweep 1 s (1001 pts)</p> <p>Peak Search Meas Tools Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2</p>

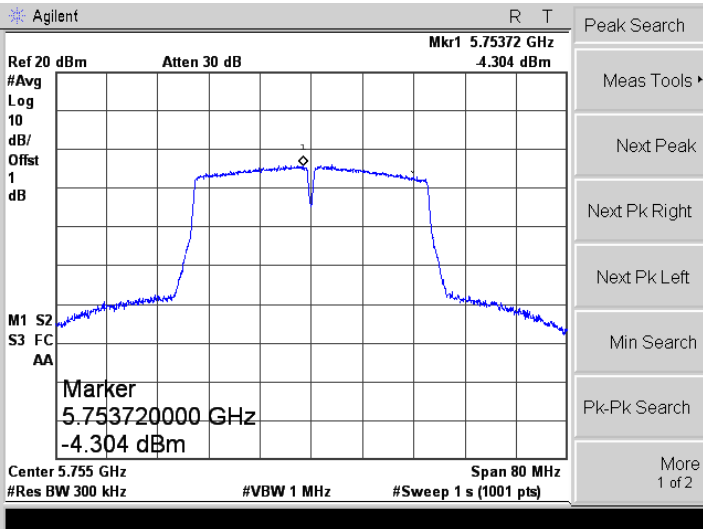
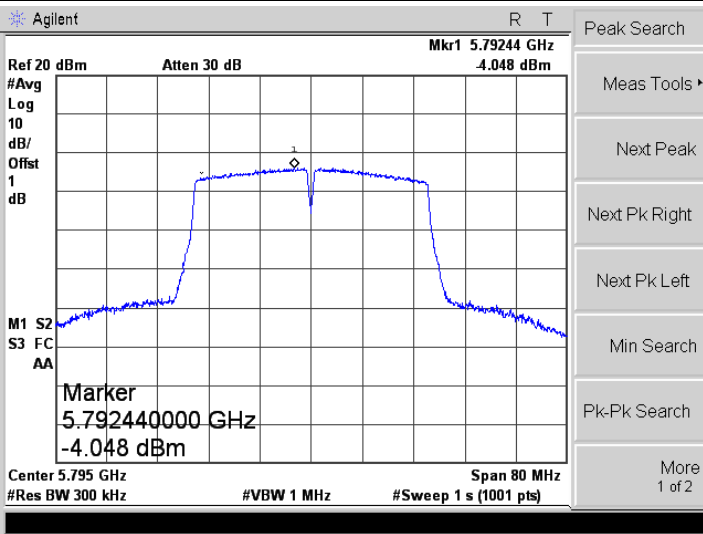
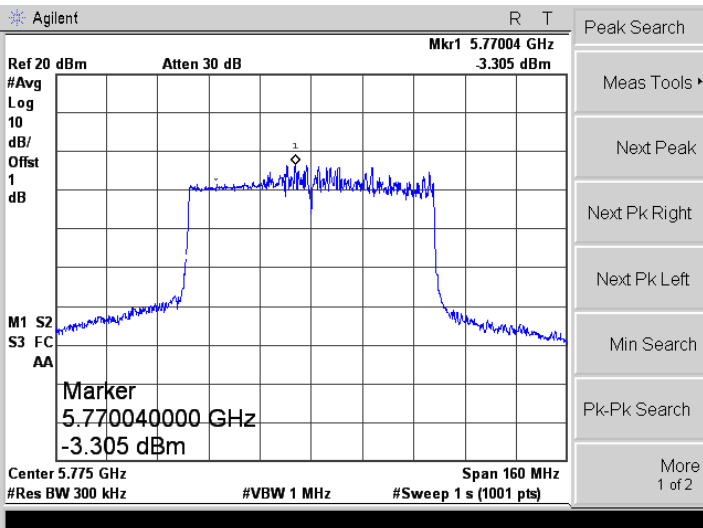
<p>802.11n-HT20-Low</p>	 <p>Agilent R T Ref 20 dBm Atten 30 dB Mkr1 5.18084 GHz 4.597 dBm #Avg Log 10 dB/ Offst 1 dB M1 S2 S3 FC AA Marker 5.180840000 GHz 4.597 dBm Center 5.18 GHz Span 40 MHz #Res BW 1 MHz #VBW 3 MHz #Sweep 1 s (1001 pts)</p>
<p>802.11n-HT20-Middle</p>	 <p>Agilent R T Ref 20 dBm Atten 30 dB Mkr1 5.20096 GHz 4.351 dBm #Avg Log 10 dB/ Offst 1 dB M1 S2 S3 FC AA Marker 5.200960000 GHz 4.351 dBm Center 5.2 GHz Span 40 MHz #Res BW 1 MHz #VBW 3 MHz #Sweep 1 s (1001 pts)</p>
<p>802.11n-HT20-High</p>	 <p>Agilent R T Ref 20 dBm Atten 30 dB Mkr1 5.23884 GHz 4.766 dBm #Avg Log 10 dB/ Offst 1 dB M1 S2 S3 FC AA Marker 5.238840000 GHz 4.766 dBm Center 5.24 GHz Span 40 MHz #Res BW 1 MHz #VBW 3 MHz #Sweep 1 s (1001 pts)</p>

<p>802.11n-HT40-Low</p>	 <p>Agilent R T</p> <p>Ref 20 dBm Atten 30 dB Mkr1 5.19272 GHz 0.476 dBm</p> <p>#Avg 10 Log dB/Offst 1 dB</p> <p>M1 S2 S3 FC AA</p> <p>Marker 5.192720000 GHz 0.476 dBm</p> <p>Center 5.19 GHz Span 80 MHz #Res BW 1 MHz #VBW 3 MHz #Sweep 1 s (1001 pts)</p> <p>Peak Search Meas Tools ▶ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2</p>
<p>802.11n-HT40-High</p>	 <p>Agilent R T</p> <p>Ref 20 dBm Atten 30 dB Mkr1 5.23272 GHz 0.683 dBm</p> <p>#Avg 10 Log dB/Offst 1 dB</p> <p>M1 S2 S3 FC AA</p> <p>Marker 5.232720000 GHz 0.683 dBm</p> <p>Center 5.23 GHz Span 80 MHz #Res BW 1 MHz #VBW 3 MHz #Sweep 1 s (1001 pts)</p> <p>Peak Search Meas Tools ▶ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2</p>
<p>802.11ac-HT80</p>	 <p>Agilent R T</p> <p>Ref 20 dBm Atten 30 dB Mkr1 5.20536 GHz 1.254 dBm</p> <p>#Avg 10 Log dB/Offst 1 dB</p> <p>M1 S2 S3 FC AA</p> <p>Marker 5.205360000 GHz 1.254 dBm</p> <p>Center 5.21 GHz Span 160 MHz #Res BW 1 MHz #VBW 3 MHz #Sweep 1 s (1001 pts)</p> <p>Peak Search Meas Tools ▶ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2</p>

5725-5850MHz

<p>802.11a-Low</p>	<p>Agilent R T Ref 20 dBm Atten 30 dB Mkr1 5.74444 GHz 0.372 dBm #Avg Log 10 dB/Offst 1 dB M1 S2 S3 FC AA Marker 5.744440000 GHz 0.372 dBm Center 5.745 GHz Span 40 MHz #Res BW 300 kHz #VBW 1 MHz #Sweep 1 s (1001 pts)</p>
<p>802.11a-Middle</p>	<p>Agilent R T Ref 20 dBm Atten 30 dB Mkr1 5.78432 GHz 0.68 dBm #Avg Log 10 dB/Offst 1 dB M1 S2 S3 FC AA Marker 5.784320000 GHz 0.68 dBm Center 5.785 GHz Span 40 MHz #Res BW 300 kHz #VBW 1 MHz #Sweep 1 s (1001 pts)</p>
<p>802.11a-High</p>	<p>Agilent R T Ref 20 dBm Atten 30 dB Mkr1 5.82568 GHz 1.232 dBm #Avg Log 10 dB/Offst 1 dB M1 S2 S3 FC AA Marker 5.825680000 GHz 1.232 dBm Center 5.825 GHz Span 40 MHz #Res BW 300 kHz #VBW 1 MHz #Sweep 1 s (1001 pts)</p>

<p>802.11n-HT20-Low</p>	
<p>802.11n-HT20-Middle</p>	
<p>802.11n-HT20-High</p>	

<p>802.11n-HT40-Low</p>	
<p>802.11n-HT40-High</p>	
<p>802.11ac-HT80</p>	

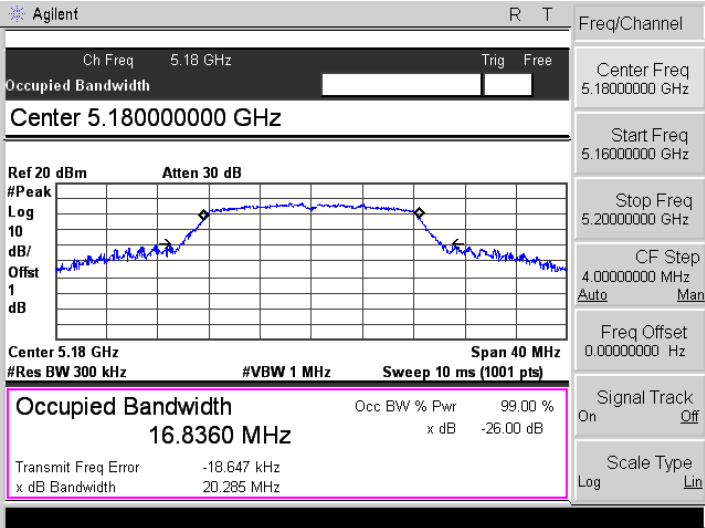
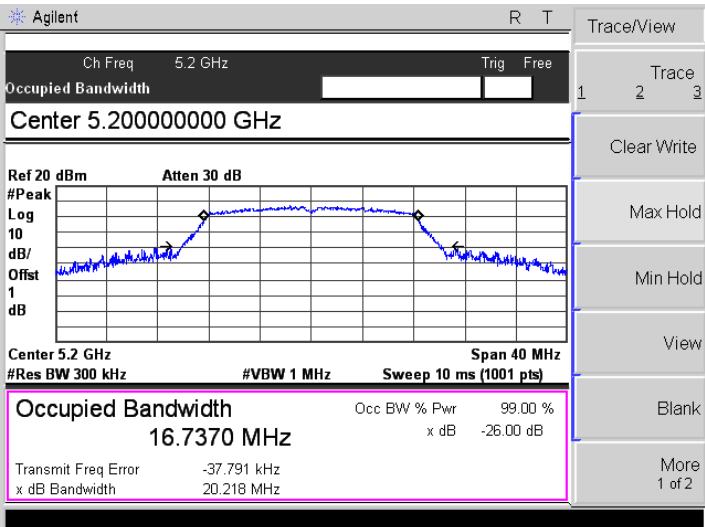
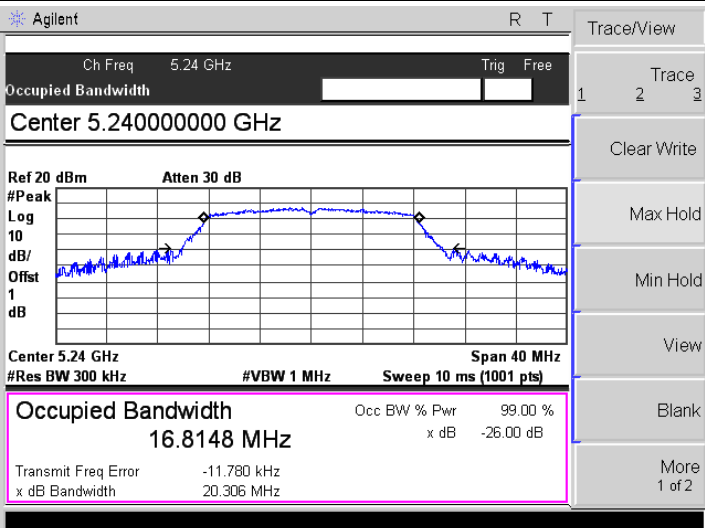
APPENDIX B**Emission Bandwidth and Occupied Bandwidth**

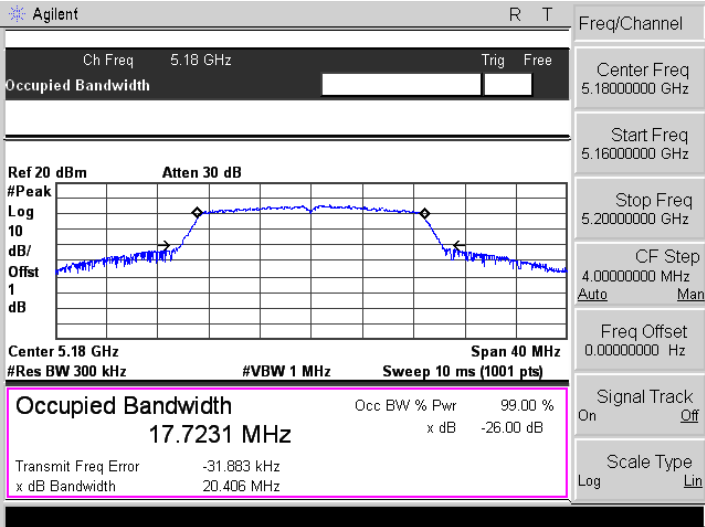
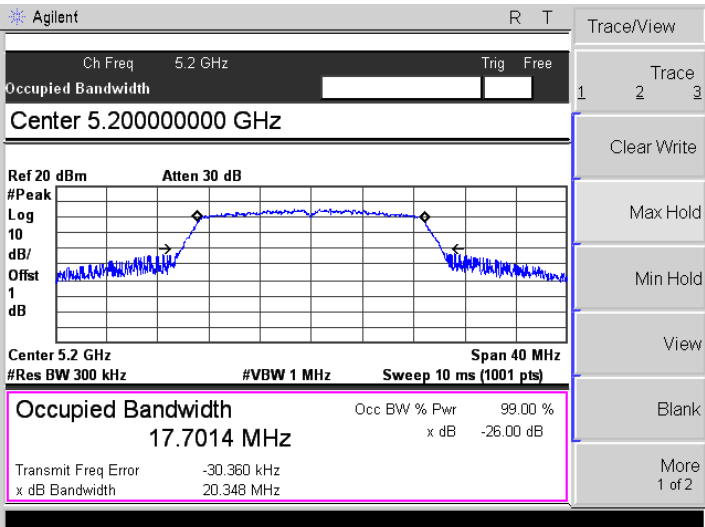
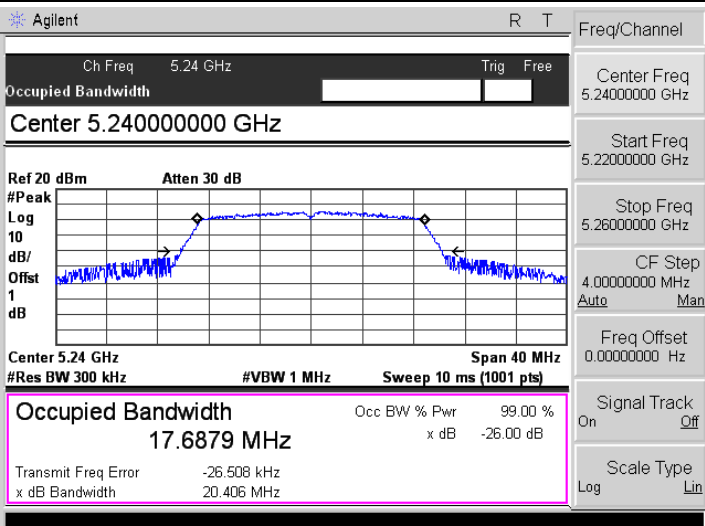
U-NII-1:5150-5250MHz						
Test Mode	Test Channel MHz	ANT 0		ANT 1		Result
		26 dB Bandwidth MHz	99% Bandwidth MHz	26 dB Bandwidth MHz	99% Bandwidth MHz	
802.11a	5180	20.285	16.836	26.095	16.980	Pass
	5200	20.218	16.737	23.817	16.837	Pass
	5240	20.306	16.815	24.683	16.825	Pass
802.11n-HT20	5180	20.406	17.723	21.012	17.738	Pass
	5200	20.348	17.701	20.718	17.717	Pass
	5240	20.406	17.688	21.767	17.718	Pass
802.11n-HT40	5190	40.144	36.085	40.813	36.156	Pass
	5230	39.927	36.070	40.660	36.098	Pass
802.11ac-HT80	5210	100.573	76.502	97.304	76.187	Pass

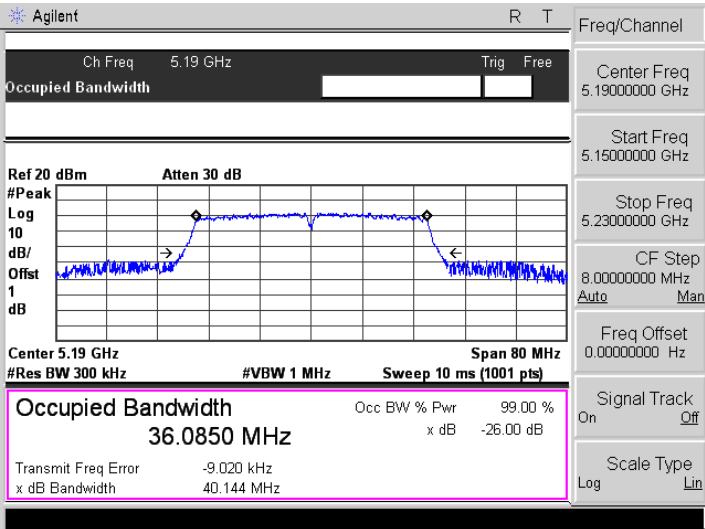
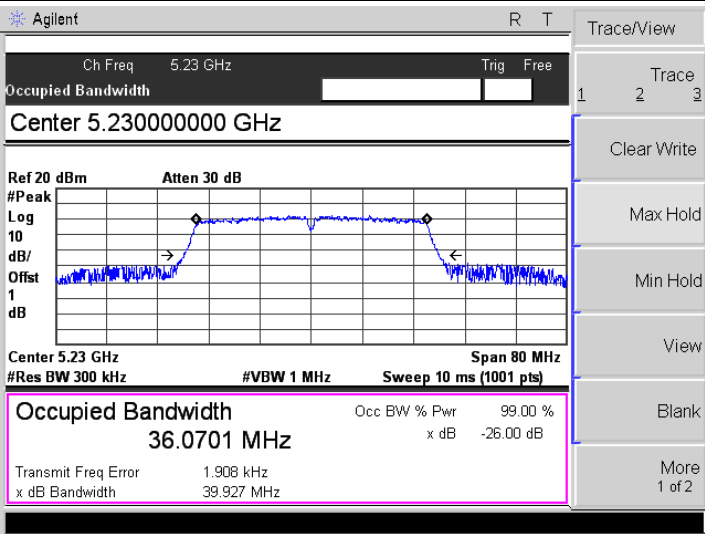
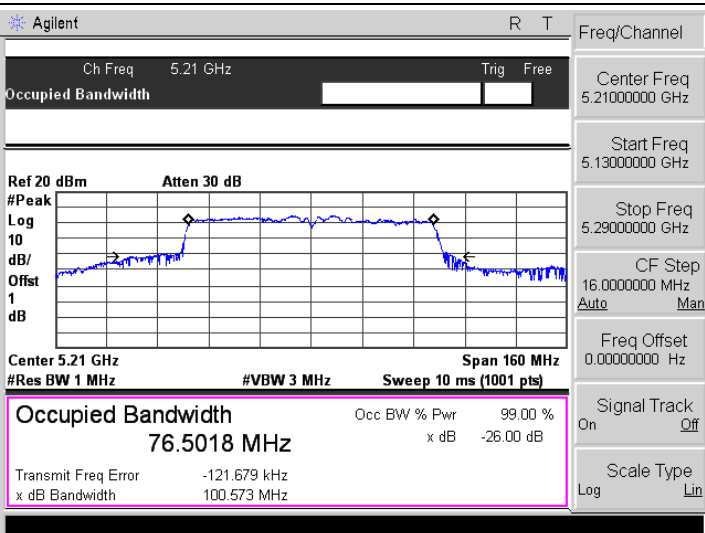
U-NII-3: 5725-5850MHz						
Test Mode	Test Channel MHz	ANT 0		ANT 1		Limit kHz
		6 dB Bandwidth MHz	99% Bandwidth MHz	6 dB Bandwidth MHz	99% Bandwidth MHz	
802.11a	5745	15.101	16.928	13.203	16.376	≥ 500
	5785	15.155	16.852	14.100	16.365	≥ 500
	5825	15.128	16.788	15.134	16.375	≥ 500
802.11n-HT20	5745	14.015	17.717	14.973	17.527	≥ 500
	5785	15.322	17.749	16.090	17.538	≥ 500
	5825	15.134	17.732	15.108	17.505	≥ 500
802.11n-HT40	5755	35.253	36.129	35.166	35.989	≥ 500
	5795	33.755	36.120	34.868	36.000	≥ 500
802.11ac-HT80	5775	75.912	76.458	75.677	75.586	≥ 500

ANT 0

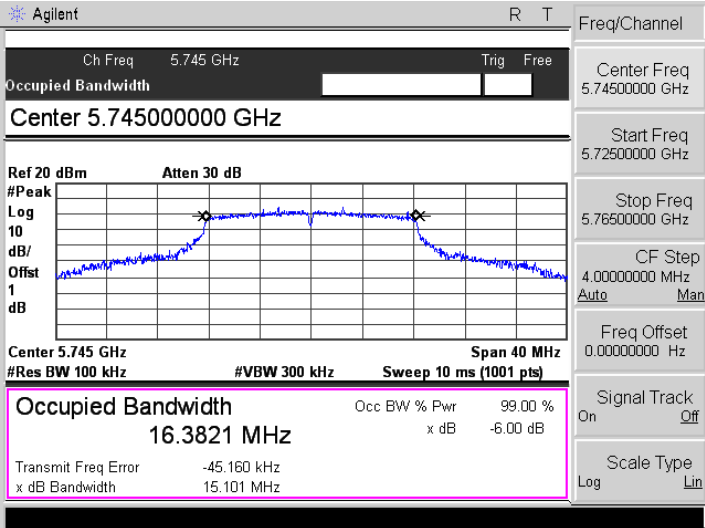
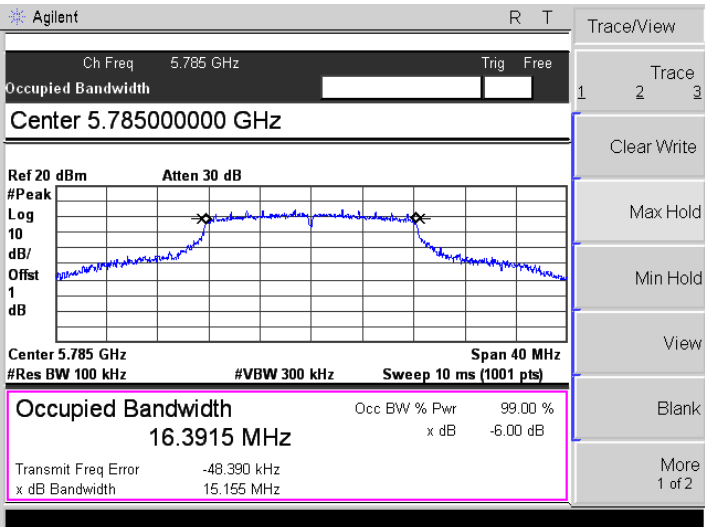
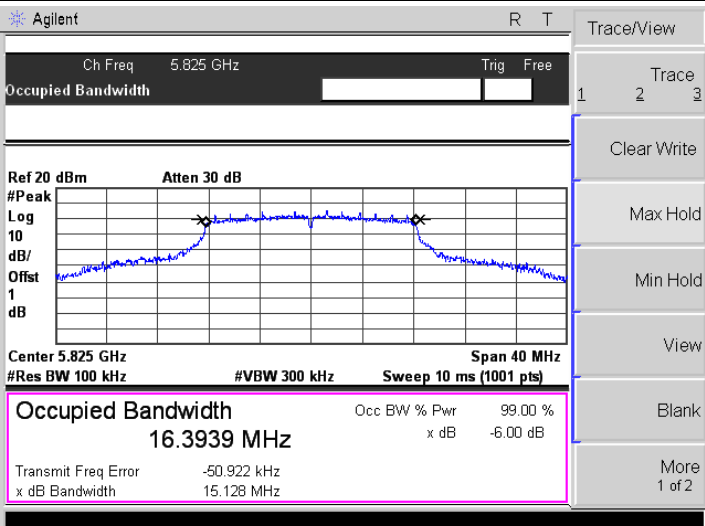
5150-5250MHz

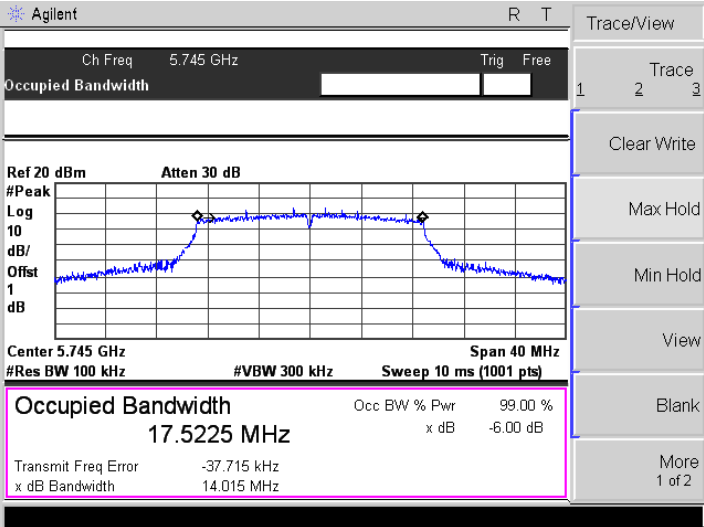
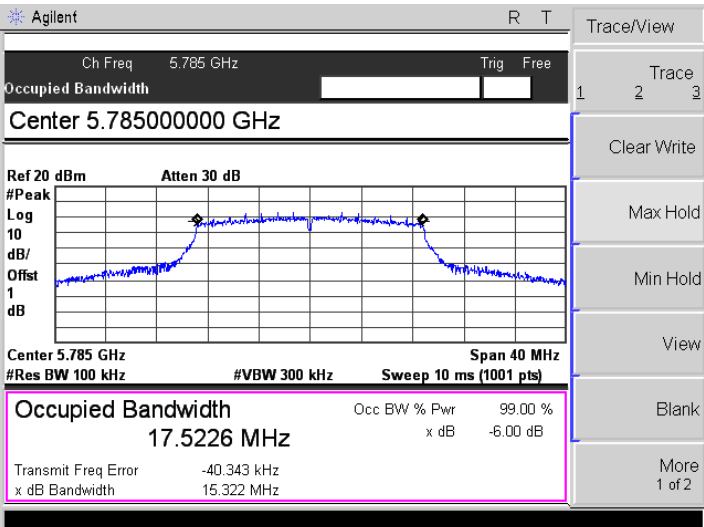
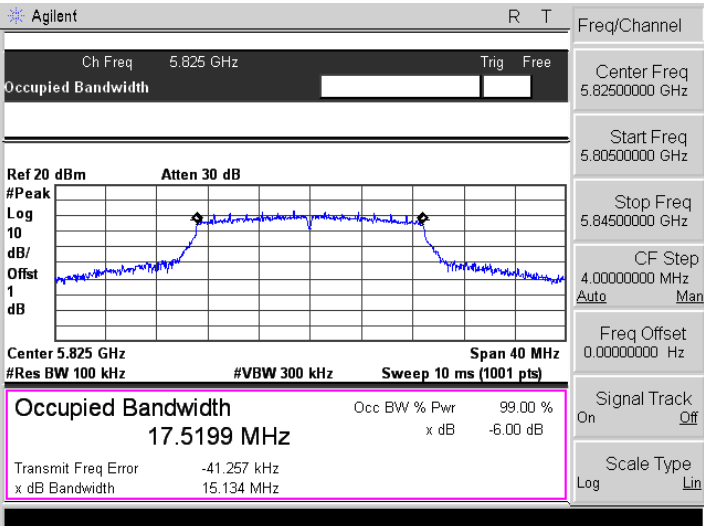
<p>802.11a-Low</p>	 <p>Agilent R T</p> <p>Ch Freq 5.18 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.18000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 5.18 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 16.8360 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -18.647 kHz x dB Bandwidth 20.285 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.18000000 GHz</p> <p>Start Freq 5.16000000 GHz</p> <p>Stop Freq 5.20000000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11a-Middle</p>	 <p>Agilent R T</p> <p>Ch Freq 5.2 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.20000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 5.2 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 16.7370 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -37.791 kHz x dB Bandwidth 20.218 MHz</p> <p>Trace/View</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
<p>802.11a-High</p>	 <p>Agilent R T</p> <p>Ch Freq 5.24 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.24000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 5.24 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 16.8148 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -11.780 kHz x dB Bandwidth 20.306 MHz</p> <p>Trace/View</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>

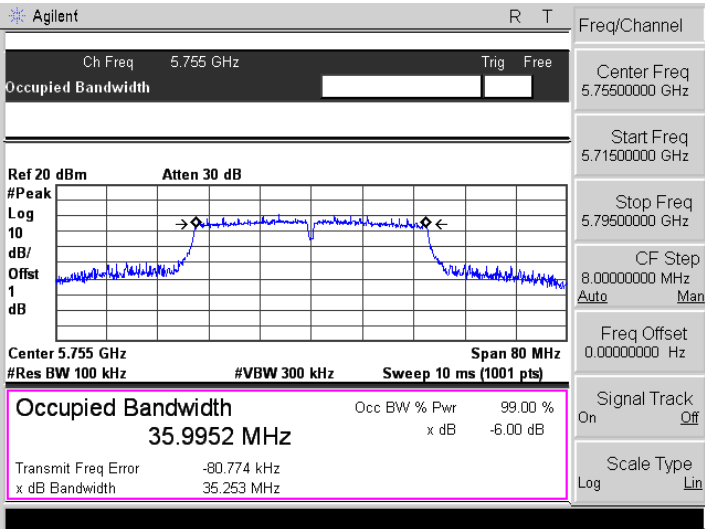
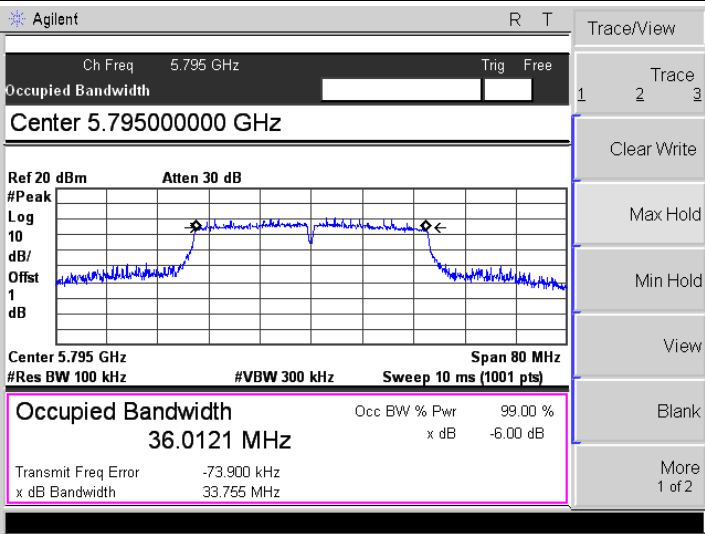
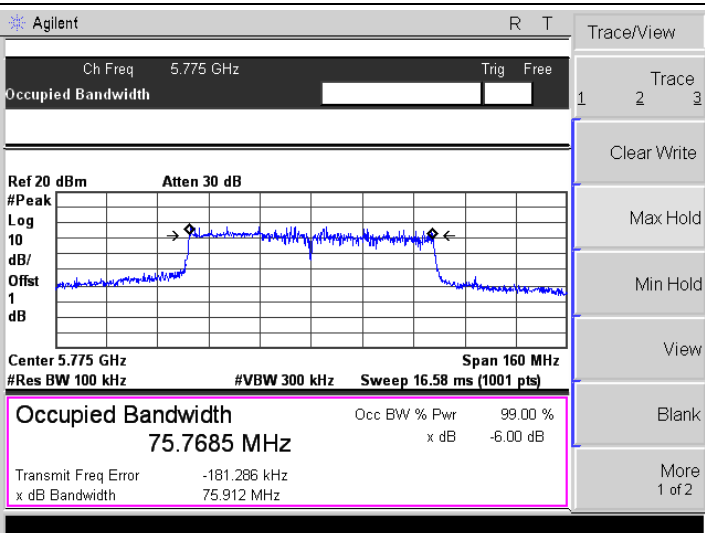
<p>802.11n-HT20-Low</p>	 <p>Agilent R T</p> <p>Ch Freq 5.18 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/ Offst 1 dB</p> <p>Center 5.18 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 17.7231 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -31.883 kHz x dB Bandwidth 20.406 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.18000000 GHz</p> <p>Start Freq 5.16000000 GHz</p> <p>Stop Freq 5.20000000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT20-Middle</p>	 <p>Agilent R T</p> <p>Ch Freq 5.2 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.20000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/ Offst 1 dB</p> <p>Center 5.2 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 17.7014 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -30.360 kHz x dB Bandwidth 20.348 MHz</p> <p>Trace/View</p> <p>1 2 3</p> <p>Trace</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
<p>802.11n-HT20-High</p>	 <p>Agilent R T</p> <p>Ch Freq 5.24 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.24000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/ Offst 1 dB</p> <p>Center 5.24 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 17.6879 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -26.508 kHz x dB Bandwidth 20.406 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.24000000 GHz</p> <p>Start Freq 5.22000000 GHz</p> <p>Stop Freq 5.26000000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

<p>802.11n-HT40-Low</p>	 <p>Agilent R T</p> <p>Ch Freq 5.19 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak</p> <p>Log 10 dB/</p> <p>Ofst 1 dB</p> <p>Center 5.19 GHz Span 80 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 36.0850 MHz</p> <p>Occ BW % Pwr 99.00 %</p> <p>x dB -26.00 dB</p> <p>Transmit Freq Error -9.020 kHz</p> <p>x dB Bandwidth 40.144 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.19000000 GHz</p> <p>Start Freq 5.15000000 GHz</p> <p>Stop Freq 5.23000000 GHz</p> <p>CF Step 8.00000000 MHz</p> <p>Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT40-High</p>	 <p>Agilent R T</p> <p>Ch Freq 5.23 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.23000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak</p> <p>Log 10 dB/</p> <p>Ofst 1 dB</p> <p>Center 5.23 GHz Span 80 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 36.0701 MHz</p> <p>Occ BW % Pwr 99.00 %</p> <p>x dB -26.00 dB</p> <p>Transmit Freq Error 1.908 kHz</p> <p>x dB Bandwidth 39.927 MHz</p> <p>Trace/View</p> <p>1 2 3</p> <p>Trace</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
<p>802.11ac-HT80</p>	 <p>Agilent R T</p> <p>Ch Freq 5.21 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak</p> <p>Log 10 dB/</p> <p>Ofst 1 dB</p> <p>Center 5.21 GHz Span 160 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 76.5018 MHz</p> <p>Occ BW % Pwr 99.00 %</p> <p>x dB -26.00 dB</p> <p>Transmit Freq Error -121.679 kHz</p> <p>x dB Bandwidth 100.573 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.21000000 GHz</p> <p>Start Freq 5.13000000 GHz</p> <p>Stop Freq 5.29000000 GHz</p> <p>CF Step 16.00000000 MHz</p> <p>Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

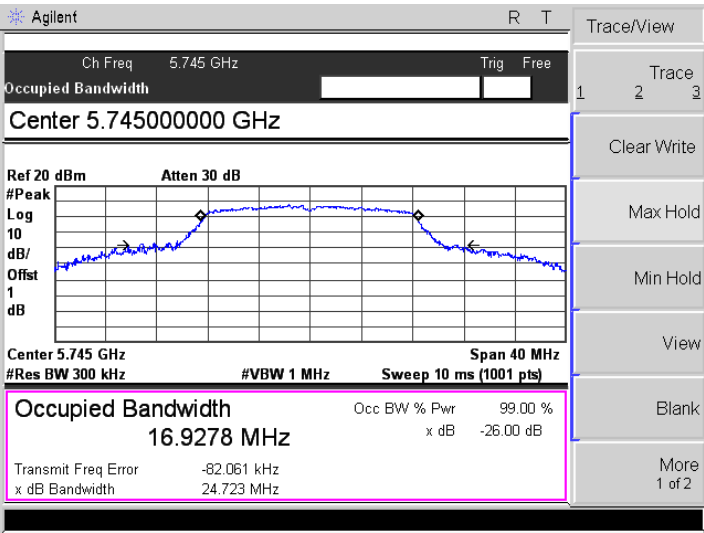
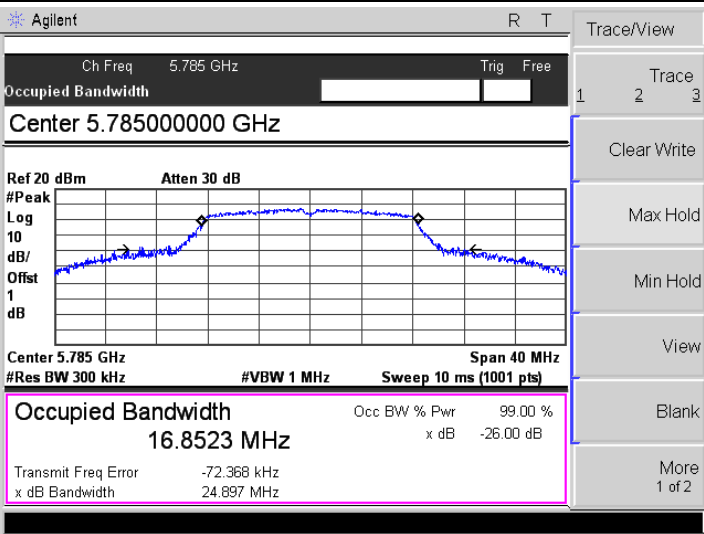
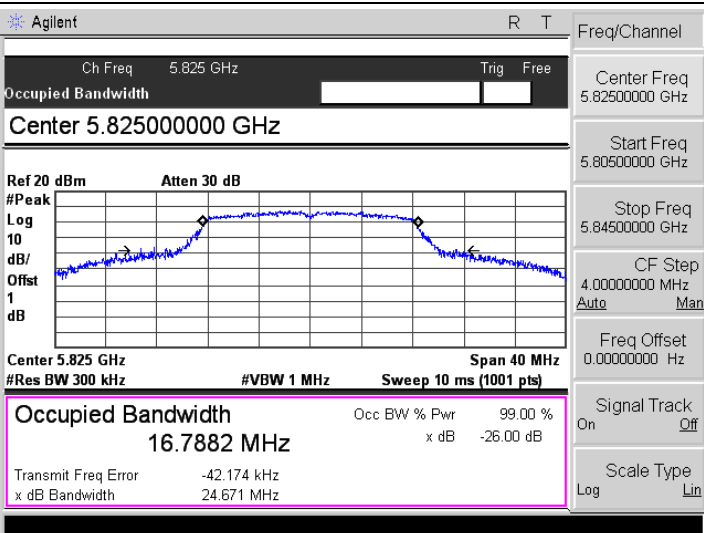
5725-5850MHz
6 dB Bandwidth

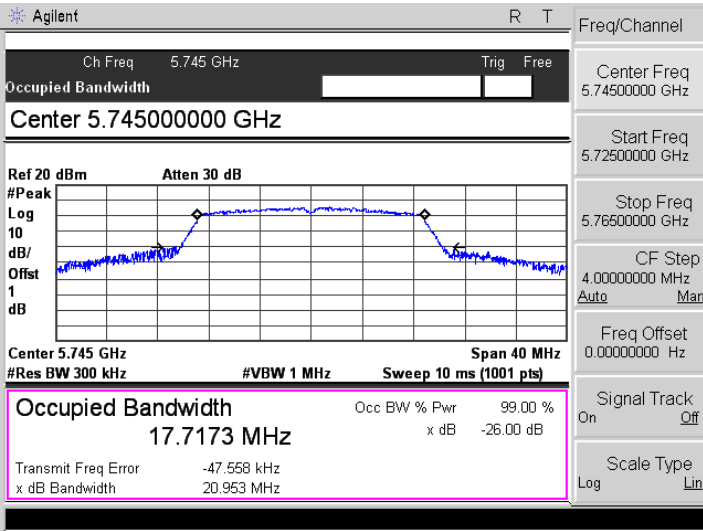
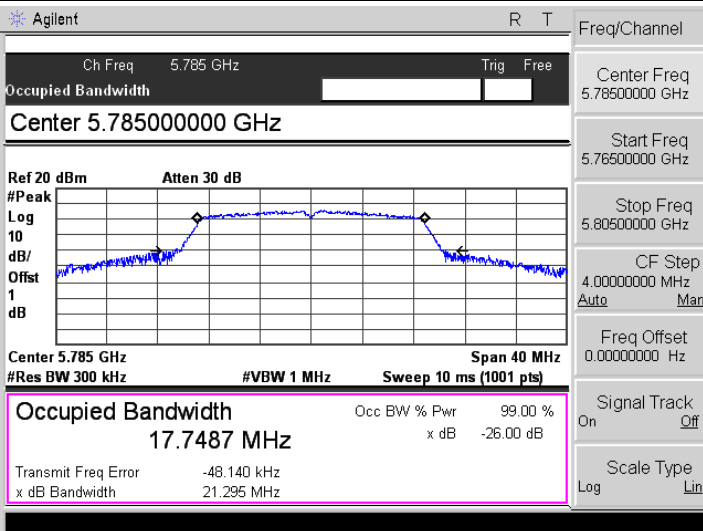
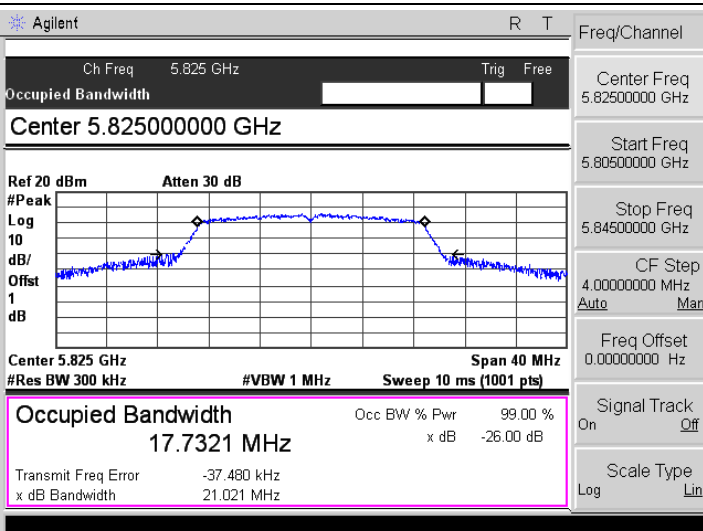
<p>802.11a-Low</p>	 <p>Agilent R T</p> <p>Ch Freq 5.745 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.74500000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak</p> <p>Log 10 dB/</p> <p>Offset 1 dB</p> <p>Center 5.745 GHz Span 40 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 16.3821 MHz</p> <p>Occ BW % Pwr 99.00 %</p> <p>x dB -6.00 dB</p> <p>Transmit Freq Error -45.160 kHz</p> <p>x dB Bandwidth 15.101 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.74500000 GHz</p> <p>Start Freq 5.72500000 GHz</p> <p>Stop Freq 5.76500000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11a-Middle</p>	 <p>Agilent R T</p> <p>Ch Freq 5.785 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.78500000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak</p> <p>Log 10 dB/</p> <p>Offset 1 dB</p> <p>Center 5.785 GHz Span 40 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 16.3915 MHz</p> <p>Occ BW % Pwr 99.00 %</p> <p>x dB -6.00 dB</p> <p>Transmit Freq Error -48.390 kHz</p> <p>x dB Bandwidth 15.155 MHz</p> <p>Trace/View</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
<p>802.11a-High</p>	 <p>Agilent R T</p> <p>Ch Freq 5.825 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.825 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak</p> <p>Log 10 dB/</p> <p>Offset 1 dB</p> <p>Center 5.825 GHz Span 40 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 16.3939 MHz</p> <p>Occ BW % Pwr 99.00 %</p> <p>x dB -6.00 dB</p> <p>Transmit Freq Error -50.922 kHz</p> <p>x dB Bandwidth 15.128 MHz</p> <p>Trace/View</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>

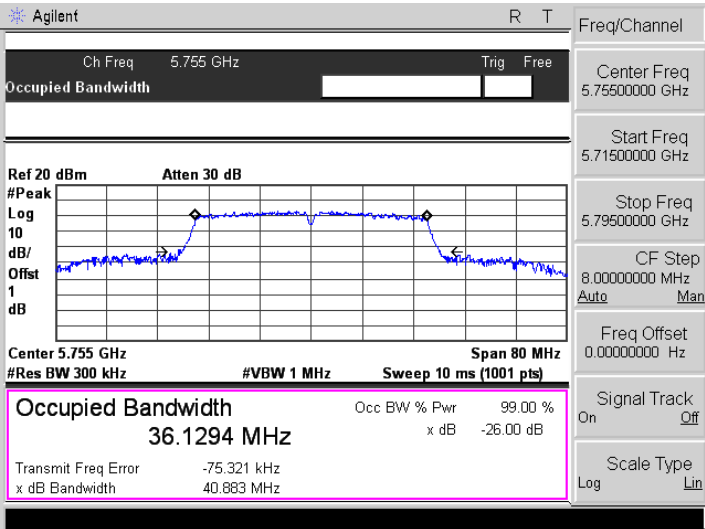
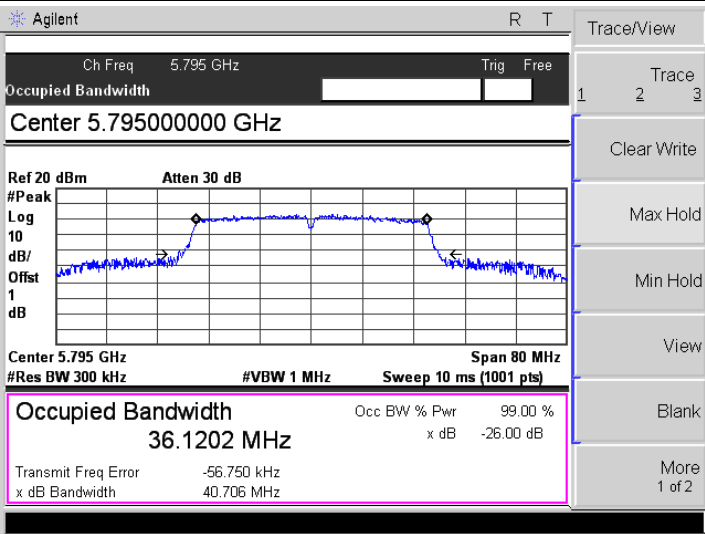
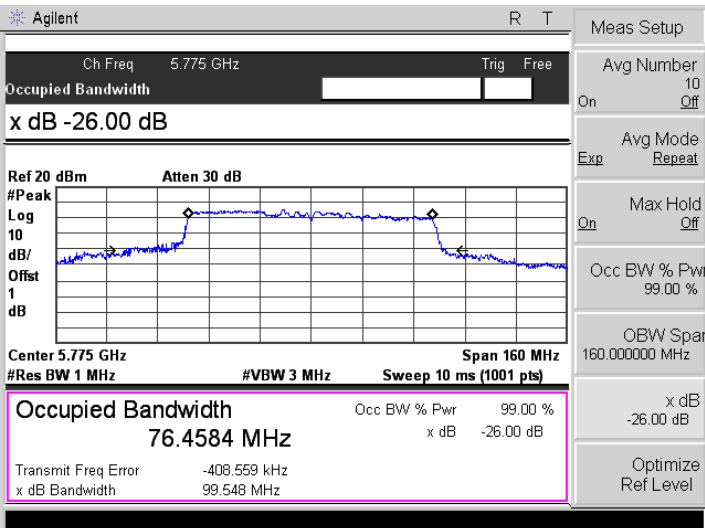
<p>802.11n-HT20-Low</p>	 <p>Agilent R T</p> <p>Ch Freq 5.745 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Ofst 1 dB</p> <p>Center 5.745 GHz Span 40 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 17.5225 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -37.715 kHz x dB Bandwidth 14.015 MHz</p> <p>Trace/View</p> <p>1 2 3</p> <p>Trace</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
<p>802.11n-HT20-Middle</p>	 <p>Agilent R T</p> <p>Ch Freq 5.785 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.78500000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Ofst 1 dB</p> <p>Center 5.785 GHz Span 40 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 17.5226 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -40.343 kHz x dB Bandwidth 15.322 MHz</p> <p>Trace/View</p> <p>1 2 3</p> <p>Trace</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
<p>802.11n-HT20-High</p>	 <p>Agilent R T</p> <p>Ch Freq 5.825 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Ofst 1 dB</p> <p>Center 5.825 GHz Span 40 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 17.5199 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -41.257 kHz x dB Bandwidth 15.134 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.82500000 GHz</p> <p>Start Freq 5.80500000 GHz</p> <p>Stop Freq 5.84500000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

<p>802.11n-HT40-Low</p>	 <p>Agilent R T</p> <p>Ch Freq 5.755 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Ofst 1 dB</p> <p>Center 5.755 GHz Span 80 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Occ BW % Pwr</td> <td>99.00 %</td> </tr> <tr> <td>35.9952 MHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>Transmit Freq Error</td> <td colspan="2">-80.774 kHz</td> </tr> <tr> <td>x dB Bandwidth</td> <td colspan="2">35.253 MHz</td> </tr> </table> <p>Freq/Channel</p> <p>Center Freq 5.75500000 GHz</p> <p>Start Freq 5.71500000 GHz</p> <p>Stop Freq 5.79500000 GHz</p> <p>CF Step 8.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>	Occupied Bandwidth	Occ BW % Pwr	99.00 %	35.9952 MHz	x dB	-6.00 dB	Transmit Freq Error	-80.774 kHz		x dB Bandwidth	35.253 MHz	
Occupied Bandwidth	Occ BW % Pwr	99.00 %											
35.9952 MHz	x dB	-6.00 dB											
Transmit Freq Error	-80.774 kHz												
x dB Bandwidth	35.253 MHz												
<p>802.11n-HT40-High</p>	 <p>Agilent R T</p> <p>Ch Freq 5.795 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.79500000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Ofst 1 dB</p> <p>Center 5.795 GHz Span 80 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Occ BW % Pwr</td> <td>99.00 %</td> </tr> <tr> <td>36.0121 MHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>Transmit Freq Error</td> <td colspan="2">-73.900 kHz</td> </tr> <tr> <td>x dB Bandwidth</td> <td colspan="2">33.755 MHz</td> </tr> </table> <p>Trace/View</p> <p>1 2 3</p> <p>Trace</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>	Occupied Bandwidth	Occ BW % Pwr	99.00 %	36.0121 MHz	x dB	-6.00 dB	Transmit Freq Error	-73.900 kHz		x dB Bandwidth	33.755 MHz	
Occupied Bandwidth	Occ BW % Pwr	99.00 %											
36.0121 MHz	x dB	-6.00 dB											
Transmit Freq Error	-73.900 kHz												
x dB Bandwidth	33.755 MHz												
<p>802.11ac-HT80</p>	 <p>Agilent R T</p> <p>Ch Freq 5.775 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Ofst 1 dB</p> <p>Center 5.775 GHz Span 160 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 16.58 ms (1001 pts)</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Occ BW % Pwr</td> <td>99.00 %</td> </tr> <tr> <td>75.7685 MHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>Transmit Freq Error</td> <td colspan="2">-181.286 kHz</td> </tr> <tr> <td>x dB Bandwidth</td> <td colspan="2">75.912 MHz</td> </tr> </table> <p>Trace/View</p> <p>1 2 3</p> <p>Trace</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>	Occupied Bandwidth	Occ BW % Pwr	99.00 %	75.7685 MHz	x dB	-6.00 dB	Transmit Freq Error	-181.286 kHz		x dB Bandwidth	75.912 MHz	
Occupied Bandwidth	Occ BW % Pwr	99.00 %											
75.7685 MHz	x dB	-6.00 dB											
Transmit Freq Error	-181.286 kHz												
x dB Bandwidth	75.912 MHz												

99% Bandwidth

<p>802.11a-Low</p>	
<p>802.11a-Middle</p>	
<p>802.11a-High</p>	

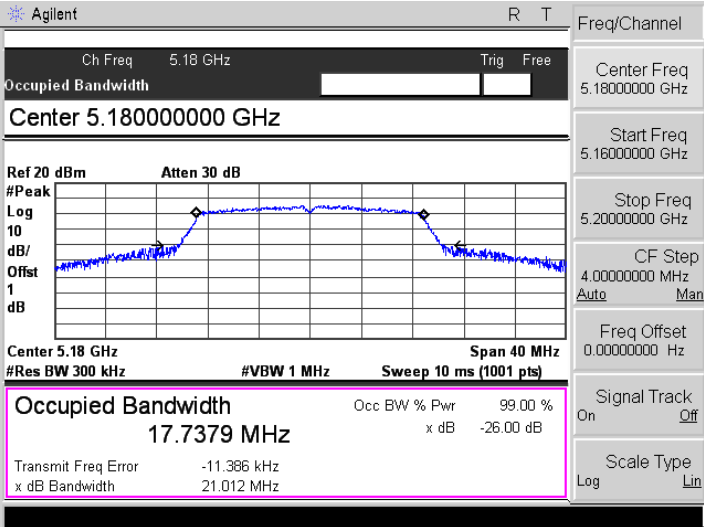
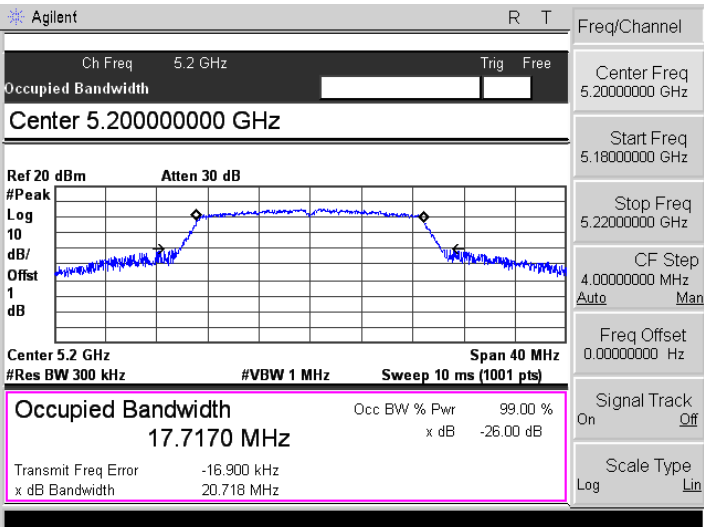
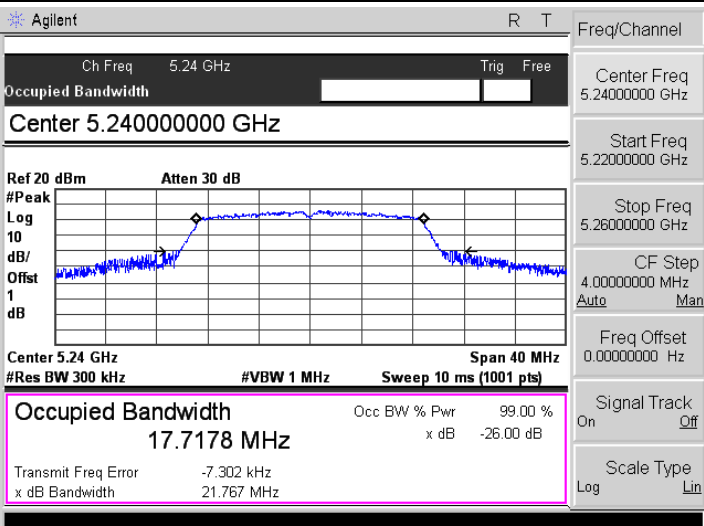
<p>802.11n-HT20-Low</p>	 <p>Agilent R T</p> <p>Ch Freq 5.745 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.74500000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak</p> <p>Log</p> <p>10</p> <p>dB/</p> <p>Offst</p> <p>1</p> <p>dB</p> <p>Center 5.745 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 17.7173 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -47.558 kHz</p> <p>x dB Bandwidth 20.953 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.74500000 GHz</p> <p>Start Freq 5.72500000 GHz</p> <p>Stop Freq 5.76500000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT20-Middle</p>	 <p>Agilent R T</p> <p>Ch Freq 5.785 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.78500000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak</p> <p>Log</p> <p>10</p> <p>dB/</p> <p>Offst</p> <p>1</p> <p>dB</p> <p>Center 5.785 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 17.7487 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -48.140 kHz</p> <p>x dB Bandwidth 21.295 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.78500000 GHz</p> <p>Start Freq 5.76500000 GHz</p> <p>Stop Freq 5.80500000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT20-High</p>	 <p>Agilent R T</p> <p>Ch Freq 5.825 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.82500000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak</p> <p>Log</p> <p>10</p> <p>dB/</p> <p>Offst</p> <p>1</p> <p>dB</p> <p>Center 5.825 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 17.7321 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -37.480 kHz</p> <p>x dB Bandwidth 21.021 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.82500000 GHz</p> <p>Start Freq 5.80500000 GHz</p> <p>Stop Freq 5.84500000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

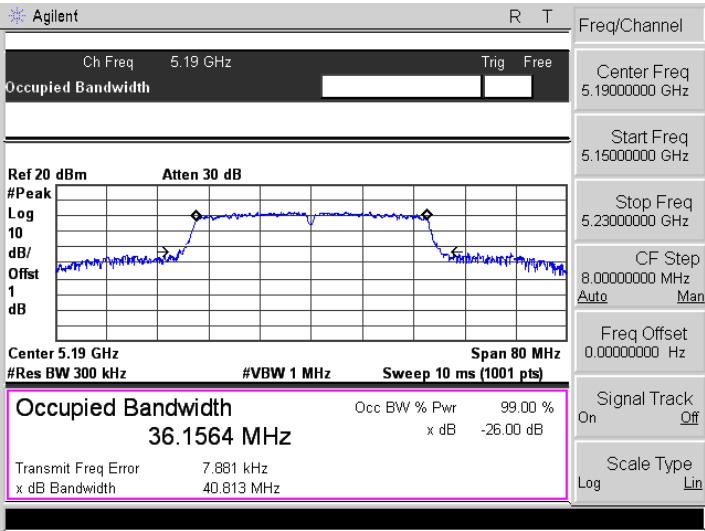
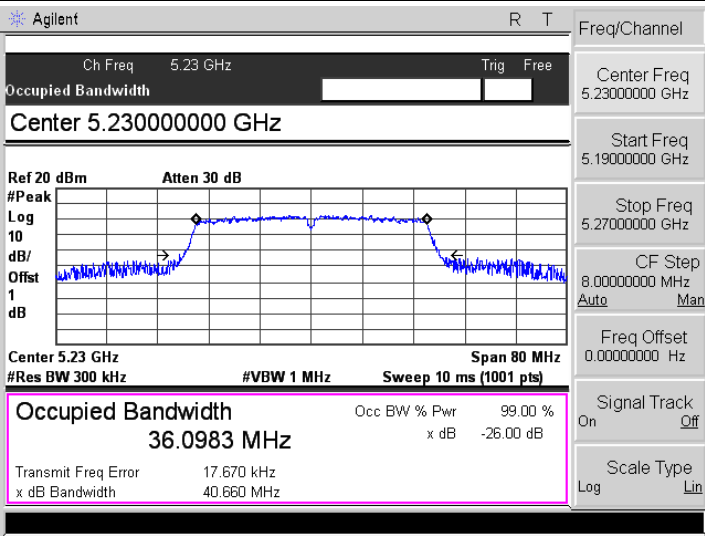
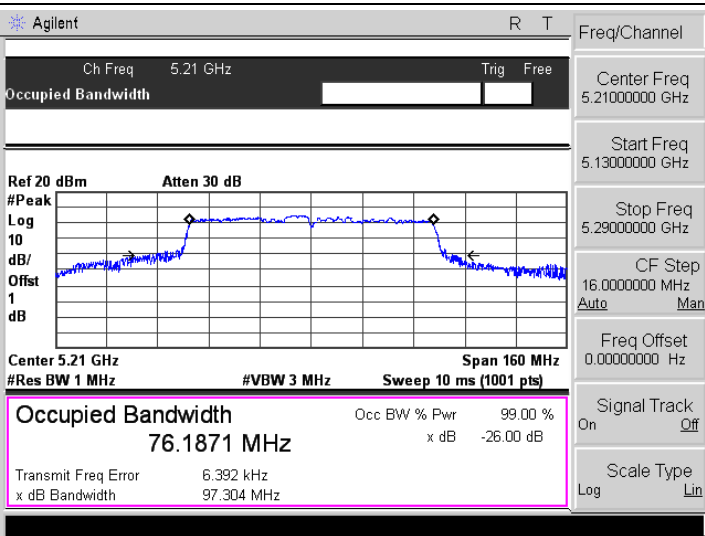
<p>802.11n-HT40-Low</p>	
<p>802.11n-HT40-High</p>	
<p>802.11ac-HT80</p>	

ANT 1

5150-5250MHz

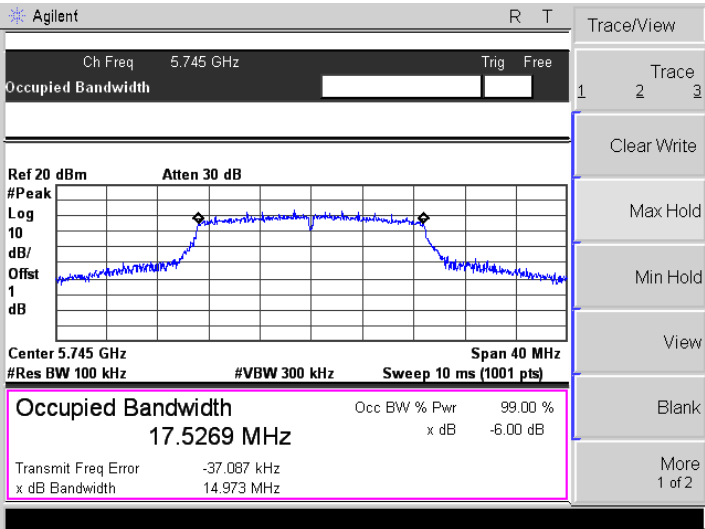
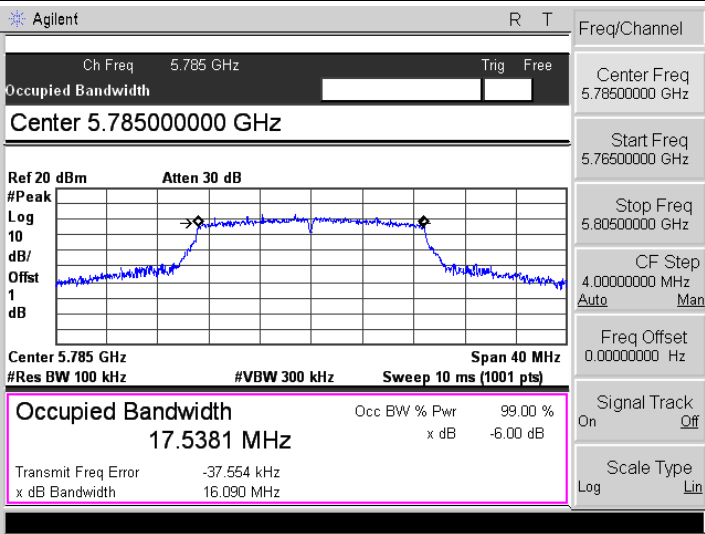
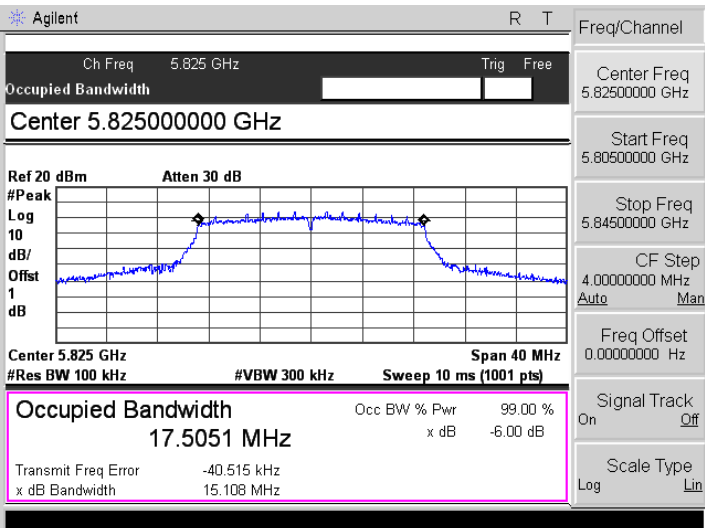
<p>802.11a-Low</p>	<p>Agilent R T</p> <p>Ch Freq 5.18 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.18000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 5.18 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 16.9798 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -22.232 kHz x dB Bandwidth 26.095 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.18000000 GHz</p> <p>Start Freq 5.16000000 GHz</p> <p>Stop Freq 5.20000000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11a-Middle</p>	<p>Agilent R T</p> <p>Ch Freq 5.2 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.20000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 5.2 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 16.8367 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 10.867 kHz x dB Bandwidth 23.817 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.20000000 GHz</p> <p>Start Freq 5.18000000 GHz</p> <p>Stop Freq 5.22000000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11a-High</p>	<p>Agilent R T</p> <p>Ch Freq 5.24 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.24000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 5.24 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 16.8246 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 9.332 kHz x dB Bandwidth 24.683 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.24000000 GHz</p> <p>Start Freq 5.22000000 GHz</p> <p>Stop Freq 5.26000000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

<p>802.11n-HT20-Low</p>	 <p>Agilent R T</p> <p>Ch Freq 5.18 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.18000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak</p> <p>Log</p> <p>10</p> <p>dB/</p> <p>Ofst</p> <p>1</p> <p>dB</p> <p>Center 5.18 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 17.7379 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -11.386 kHz</p> <p>x dB Bandwidth 21.012 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.18000000 GHz</p> <p>Start Freq 5.16000000 GHz</p> <p>Stop Freq 5.20000000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT20-Middle</p>	 <p>Agilent R T</p> <p>Ch Freq 5.2 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.20000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak</p> <p>Log</p> <p>10</p> <p>dB/</p> <p>Ofst</p> <p>1</p> <p>dB</p> <p>Center 5.2 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 17.7170 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -16.900 kHz</p> <p>x dB Bandwidth 20.718 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.20000000 GHz</p> <p>Start Freq 5.18000000 GHz</p> <p>Stop Freq 5.22000000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT20-High</p>	 <p>Agilent R T</p> <p>Ch Freq 5.24 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.24000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak</p> <p>Log</p> <p>10</p> <p>dB/</p> <p>Ofst</p> <p>1</p> <p>dB</p> <p>Center 5.24 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 17.7178 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -7.302 kHz</p> <p>x dB Bandwidth 21.767 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.24000000 GHz</p> <p>Start Freq 5.22000000 GHz</p> <p>Stop Freq 5.26000000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

<p>802.11n-HT40-Low</p>	 <p>Agilent R T</p> <p>Ch Freq 5.19 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Ofst 1 dB</p> <p>Center 5.19 GHz Span 80 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 36.1564 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 7.881 kHz x dB Bandwidth 40.813 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.19000000 GHz</p> <p>Start Freq 5.15000000 GHz</p> <p>Stop Freq 5.23000000 GHz</p> <p>CF Step 8.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT40-High</p>	 <p>Agilent R T</p> <p>Ch Freq 5.23 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.23000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Ofst 1 dB</p> <p>Center 5.23 GHz Span 80 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 36.0983 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 17.670 kHz x dB Bandwidth 40.660 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.23000000 GHz</p> <p>Start Freq 5.19000000 GHz</p> <p>Stop Freq 5.27000000 GHz</p> <p>CF Step 8.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11ac-HT80</p>	 <p>Agilent R T</p> <p>Ch Freq 5.21 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Ofst 1 dB</p> <p>Center 5.21 GHz Span 160 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 76.1871 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 6.392 kHz x dB Bandwidth 97.304 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.21000000 GHz</p> <p>Start Freq 5.13000000 GHz</p> <p>Stop Freq 5.29000000 GHz</p> <p>CF Step 16.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

5725-5850MHz
6 dB Bandwidth

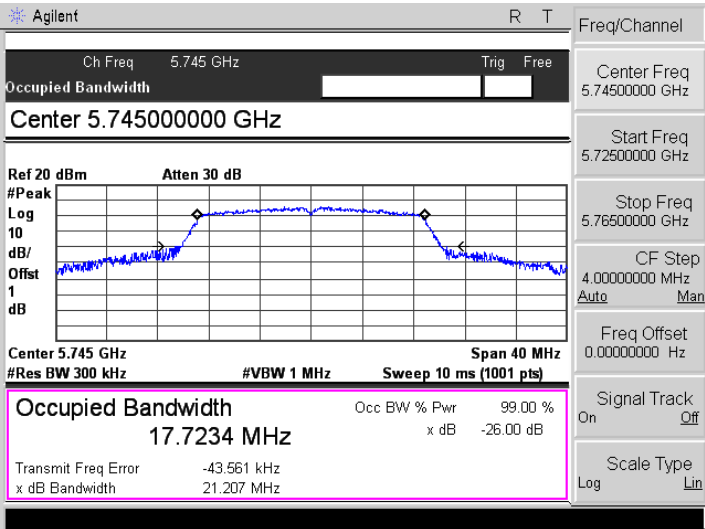
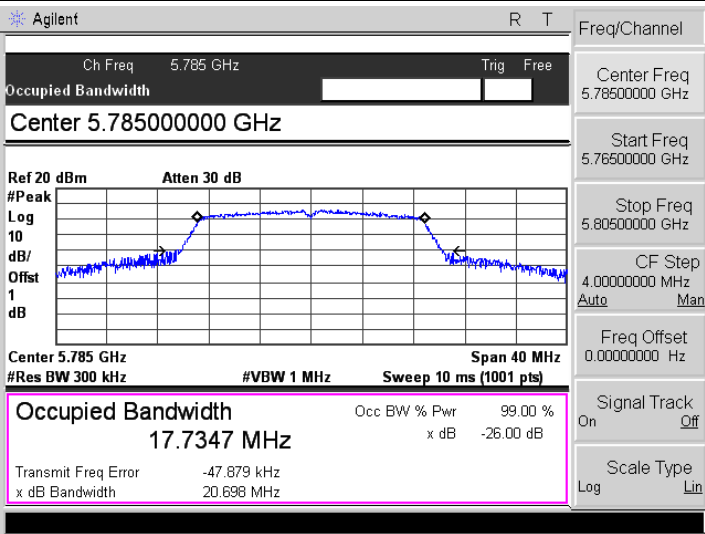
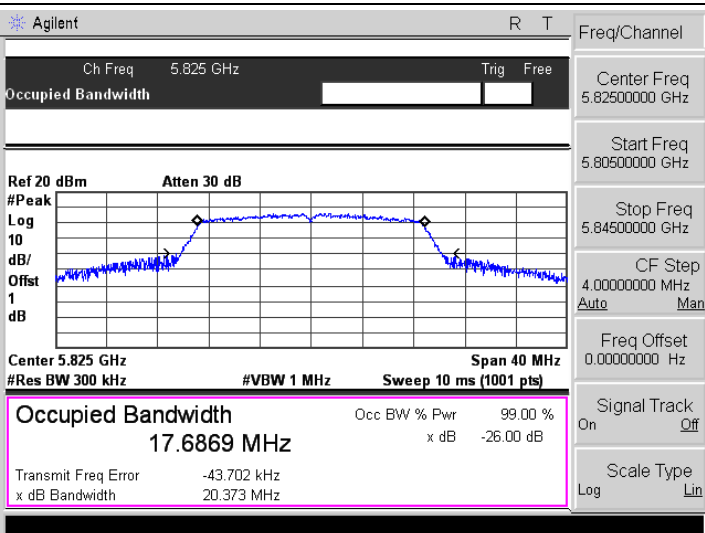
<p>802.11a-Low</p>	<p>Agilent R T</p> <p>Ch Freq 5.745 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.74500000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 5.745 GHz Span 40 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 16.3757 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -35.993 kHz</p> <p>x dB Bandwidth 13.203 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.74500000 GHz</p> <p>Start Freq 5.72500000 GHz</p> <p>Stop Freq 5.76500000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11a-Middle</p>	<p>Agilent R T</p> <p>Ch Freq 5.785 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.78500000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 5.785 GHz Span 40 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 16.3652 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -36.556 kHz</p> <p>x dB Bandwidth 14.100 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.78500000 GHz</p> <p>Start Freq 5.76500000 GHz</p> <p>Stop Freq 5.80500000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11a-High</p>	<p>Agilent R T</p> <p>Ch Freq 5.825 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.82500000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 5.825 GHz Span 40 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 16.3752 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -45.649 kHz</p> <p>x dB Bandwidth 15.134 MHz</p> <p>Trace/View</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>

<p>802.11n-HT20-Low</p>	
<p>802.11n-HT20-Middle</p>	
<p>802.11n-HT20-High</p>	

<p>802.11n-HT40-Low</p>	<p>Agilent R T</p> <p>Ch Freq 5.755 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Ofst 1 dB</p> <p>Center 5.755 GHz Span 80 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 35.9892 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -48.623 kHz x dB Bandwidth 35.166 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.75500000 GHz</p> <p>Start Freq 5.71500000 GHz</p> <p>Stop Freq 5.79500000 GHz</p> <p>CF Step 8.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT40-High</p>	<p>Agilent R T</p> <p>Ch Freq 5.795 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.795000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Ofst 1 dB</p> <p>Center 5.795 GHz Span 80 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 35.9999 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -59.986 kHz x dB Bandwidth 34.868 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.79500000 GHz</p> <p>Start Freq 5.75500000 GHz</p> <p>Stop Freq 5.83500000 GHz</p> <p>CF Step 8.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11ac-HT80</p>	<p>Agilent R T</p> <p>Ch Freq 5.775 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Ofst 1 dB</p> <p>Center 5.775 GHz Span 160 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 16.58 ms (1001 pts)</p> <p>Occupied Bandwidth 75.5857 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -214.509 kHz x dB Bandwidth 75.677 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.77500000 GHz</p> <p>Start Freq 5.69500000 GHz</p> <p>Stop Freq 5.85500000 GHz</p> <p>CF Step 16.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

99% Bandwidth

<p>802.11a-Low</p>	<p>Agilent R T</p> <p>Ch Freq 5.745 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.74500000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 5.745 GHz Span 40 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 16.7454 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -83.939 kHz x dB Bandwidth 22.374 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.74500000 GHz</p> <p>Start Freq 5.72500000 GHz</p> <p>Stop Freq 5.76500000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11a-Middle</p>	<p>Agilent R T</p> <p>Ch Freq 5.785 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.78500000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 5.785 GHz Span 40 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 17.4471 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 19.928 kHz x dB Bandwidth 31.090 MHz</p> <p>Trace/View</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
<p>802.11a-High</p>	<p>Agilent R T</p> <p>Ch Freq 5.785 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.78500000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 5.785 GHz Span 40 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 16.9332 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -78.860 kHz x dB Bandwidth 23.735 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.78500000 GHz</p> <p>Start Freq 5.76500000 GHz</p> <p>Stop Freq 5.80500000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

<p>802.11n-HT20-Low</p>	 <p>Agilent R T</p> <p>Ch Freq 5.745 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.74500000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak</p> <p>Log</p> <p>10 dB/</p> <p>Offst</p> <p>1 dB</p> <p>Center 5.745 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 17.7234 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -43.561 kHz</p> <p>x dB Bandwidth 21.207 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.74500000 GHz</p> <p>Start Freq 5.72500000 GHz</p> <p>Stop Freq 5.76500000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT20-Middle</p>	 <p>Agilent R T</p> <p>Ch Freq 5.785 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.78500000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak</p> <p>Log</p> <p>10 dB/</p> <p>Offst</p> <p>1 dB</p> <p>Center 5.785 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 17.7347 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -47.879 kHz</p> <p>x dB Bandwidth 20.698 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.78500000 GHz</p> <p>Start Freq 5.76500000 GHz</p> <p>Stop Freq 5.80500000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT20-High</p>	 <p>Agilent R T</p> <p>Ch Freq 5.825 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.82500000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak</p> <p>Log</p> <p>10 dB/</p> <p>Offst</p> <p>1 dB</p> <p>Center 5.825 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 17.6869 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -43.702 kHz</p> <p>x dB Bandwidth 20.373 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.82500000 GHz</p> <p>Start Freq 5.80500000 GHz</p> <p>Stop Freq 5.84500000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

<p>802.11n-HT40-Low</p>	<p>Agilent R T Trace/View</p> <p>Ch Freq 5.755 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Ofst 1 dB</p> <p>Center 5.755 GHz Span 80 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth Occ BW % Pwr 99.00 % 36.0856 MHz x dB -26.00 dB</p> <p>Transmit Freq Error -48.576 kHz x dB Bandwidth 40.696 MHz</p>
<p>802.11n-HT40-High</p>	<p>Agilent R T Trace/View</p> <p>Ch Freq 5.795 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.79500000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Ofst 1 dB</p> <p>Center 5.795 GHz Span 80 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth Occ BW % Pwr 99.00 % 36.0981 MHz x dB -26.00 dB</p> <p>Transmit Freq Error -40.053 kHz x dB Bandwidth 40.797 MHz</p>
<p>802.11ac-HT80</p>	<p>Agilent R T Trace/View</p> <p>Ch Freq 5.775 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>x dB -26.00 dB</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Ofst 1 dB</p> <p>Center 5.775 GHz Span 160 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth Occ BW % Pwr 99.00 % 76.2617 MHz x dB -26.00 dB</p> <p>Transmit Freq Error -297.113 kHz x dB Bandwidth 109.306 MHz</p>

APPENDIX C

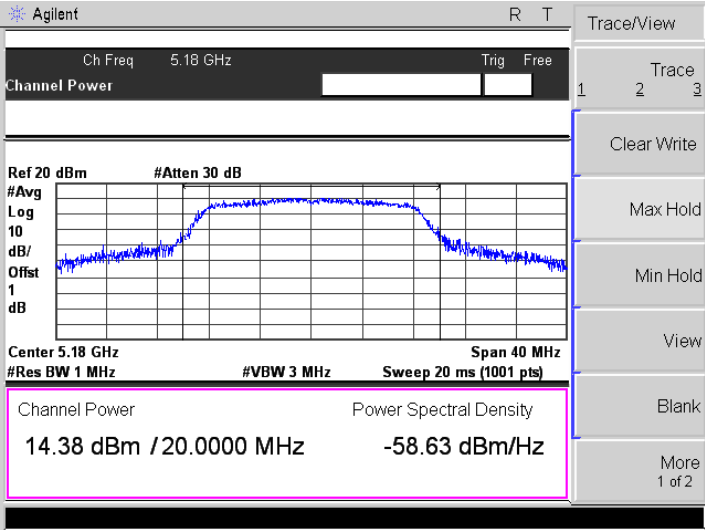
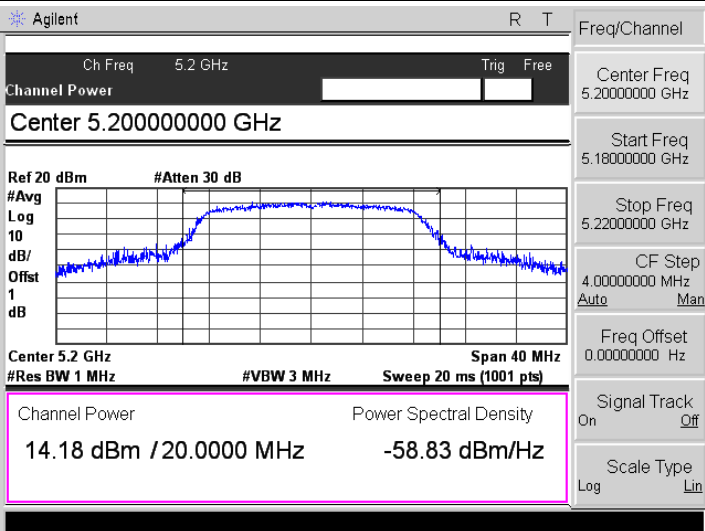
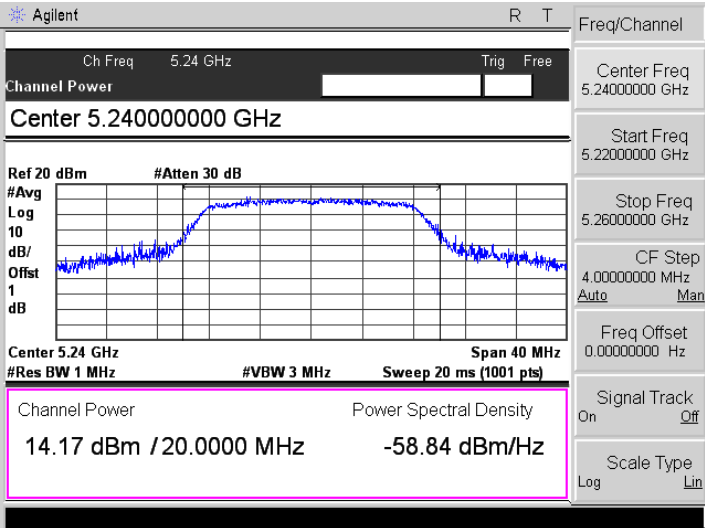
Maximum Conducted Output Power

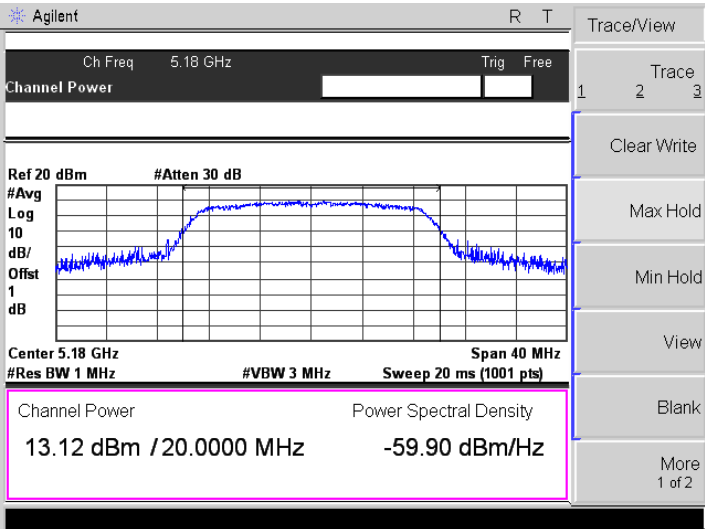
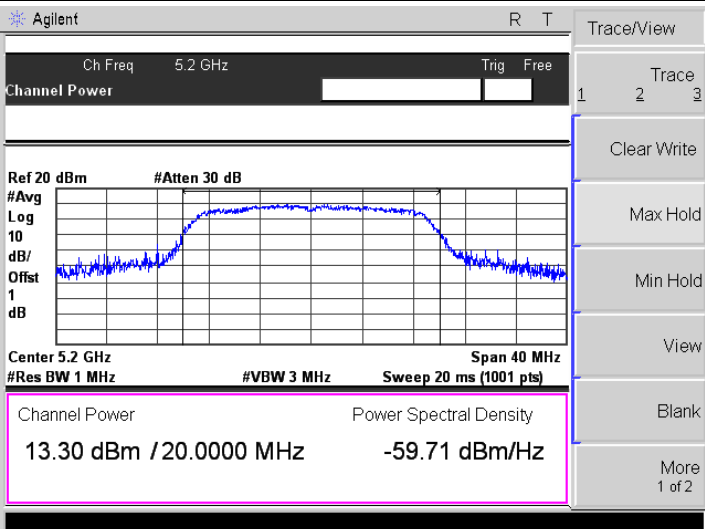
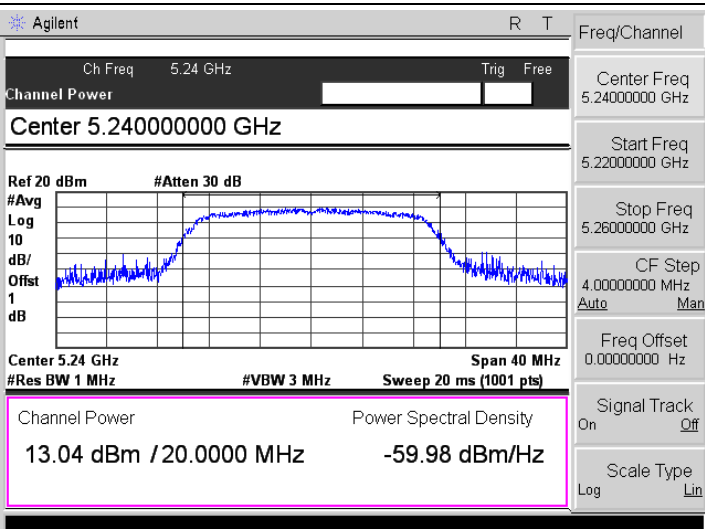
U-NII-1:5150-5250MHz					
Test mode	Frequency MHz	Output Power dBm		Total dBm	Limit dBm
		ANT 0	ANT 1		
802.11a	5180	14.38	13.68	/	23.98
	5200	14.18	14.06	/	23.98
	5240	14.17	14.10	/	23.98
802.11n-HT20	5180	13.12	12.91	16.03	23.98
	5200	13.30	12.59	15.97	23.98
	5240	13.04	12.95	16.01	23.98
802.11n-HT40	5190	13.03	12.66	15.86	23.98
	5230	13.30	13.08	16.20	23.98
802.11ac VH80	5210	12.62	12.15	15.40	23.98

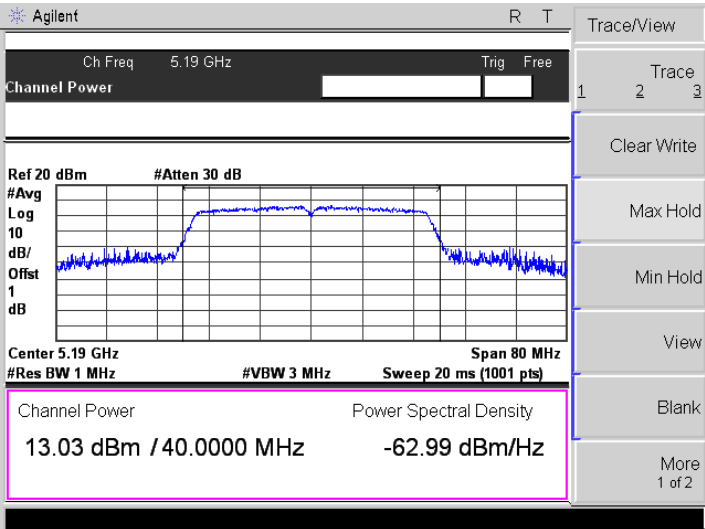
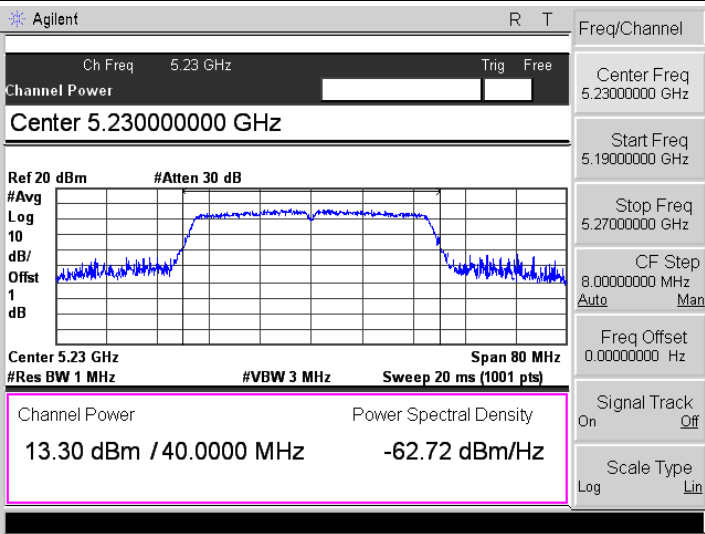
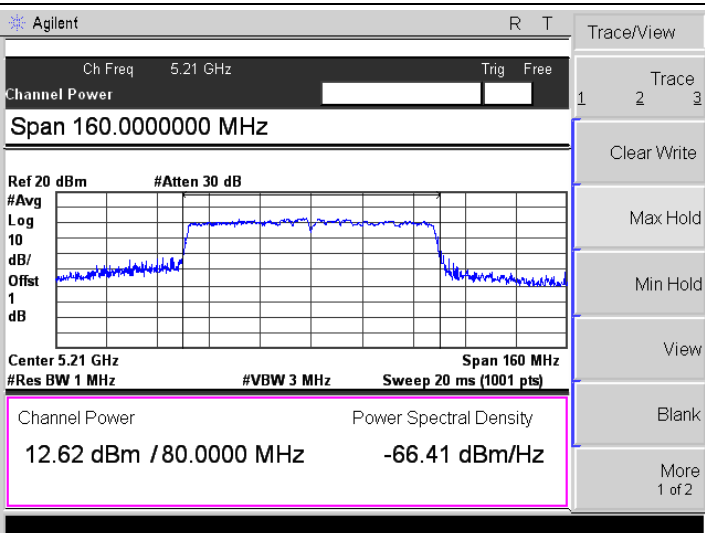
U-NII-3: 5725-5850MHz					
Test mode	Frequency MHz	Output Power dBm		Total dBm	Limit dBm
		ANT 0	ANT 1		
802.11a	5745	14.23	14.12	/	5745
	5785	14.46	14.57	/	5785
	5825	14.30	14.67	/	5825
802.11n-HT20	5745	12.78	12.88	15.84	5745
	5785	12.83	13.65	16.27	5785
	5825	13.22	13.37	16.31	5825
802.11n-HT40	5755	12.68	12.73	15.72	5755
	5795	12.72	13.11	15.93	5795
802.11ac VH80	5775	11.91	12.73	15.35	5775

ANT 0

5150-5250MHz

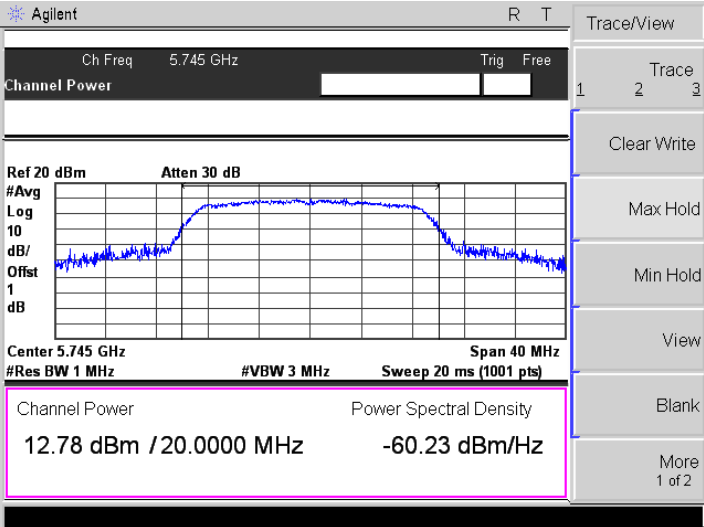
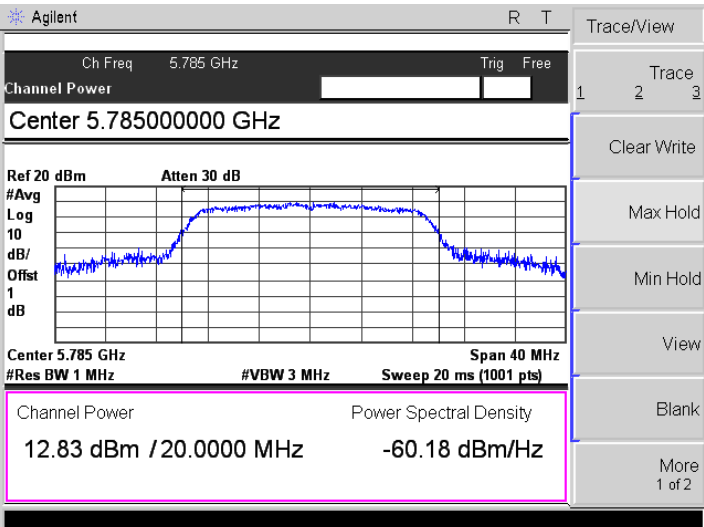
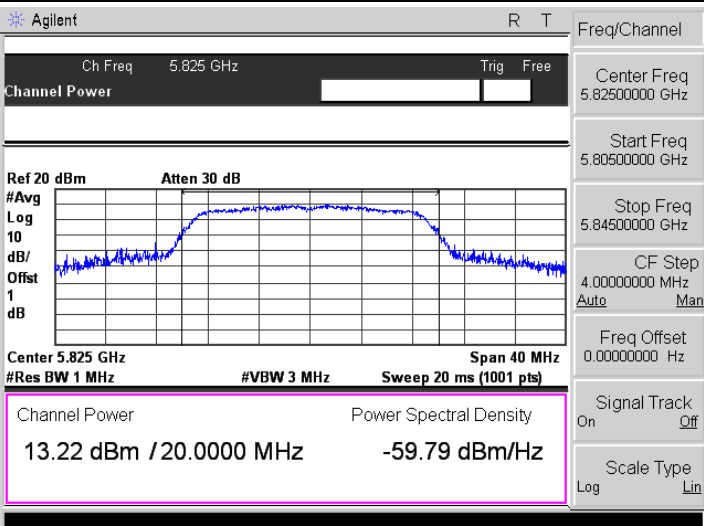
<p>802.11a-Low</p>	
<p>802.11a-Middle</p>	
<p>802.11a-High</p>	

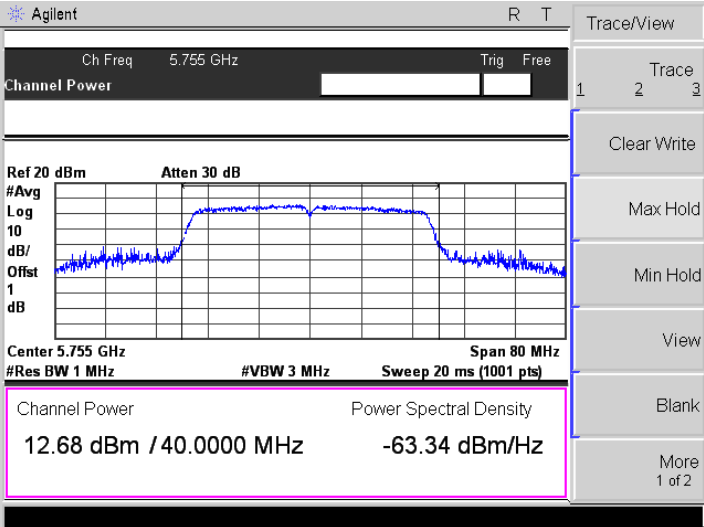
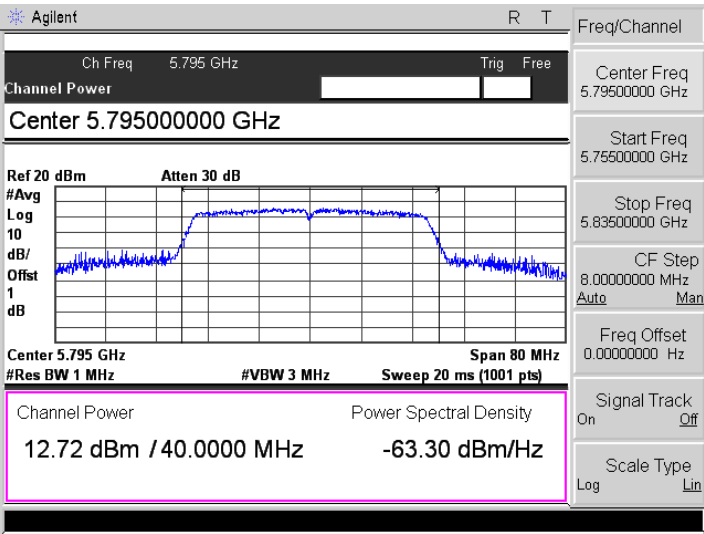
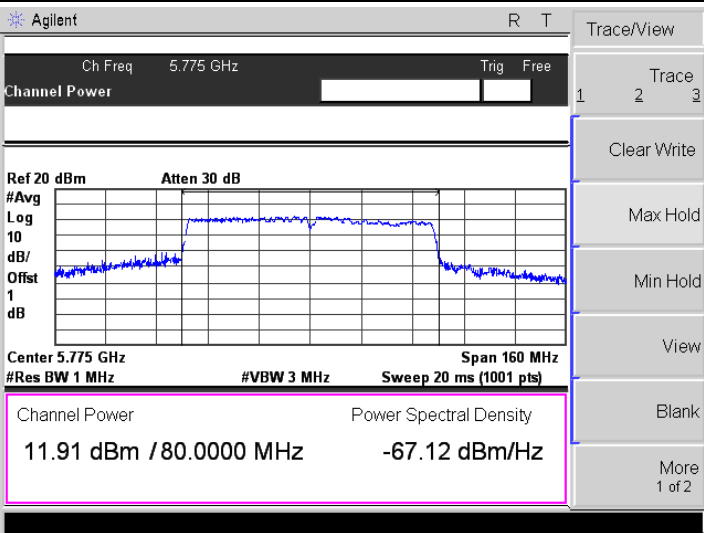
<p>802.11n-HT20-Low</p>	
<p>802.11n-HT20-Middle</p>	
<p>802.11n-HT20-High</p>	

<p>802.11n-HT40-Low</p>	 <p>Agilent R T</p> <p>Ch Freq 5.19 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Avg Log 10 dB/Offset 1 dB</p> <p>Center 5.19 GHz Span 80 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <table border="1"> <tr> <td>Channel Power</td> <td>Power Spectral Density</td> </tr> <tr> <td>13.03 dBm / 40.0000 MHz</td> <td>-62.99 dBm/Hz</td> </tr> </table> <p>Trace/View</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>	Channel Power	Power Spectral Density	13.03 dBm / 40.0000 MHz	-62.99 dBm/Hz
Channel Power	Power Spectral Density				
13.03 dBm / 40.0000 MHz	-62.99 dBm/Hz				
<p>802.11n-HT40-High</p>	 <p>Agilent R T</p> <p>Ch Freq 5.23 GHz Trig Free</p> <p>Channel Power</p> <p>Center 5.23000000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Avg Log 10 dB/Offset 1 dB</p> <p>Center 5.23 GHz Span 80 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <table border="1"> <tr> <td>Channel Power</td> <td>Power Spectral Density</td> </tr> <tr> <td>13.30 dBm / 40.0000 MHz</td> <td>-62.72 dBm/Hz</td> </tr> </table> <p>Freq/Channel</p> <p>Center Freq 5.23000000 GHz</p> <p>Start Freq 5.19000000 GHz</p> <p>Stop Freq 5.27000000 GHz</p> <p>CF Step 8.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>	Channel Power	Power Spectral Density	13.30 dBm / 40.0000 MHz	-62.72 dBm/Hz
Channel Power	Power Spectral Density				
13.30 dBm / 40.0000 MHz	-62.72 dBm/Hz				
<p>802.11ac-HT80</p>	 <p>Agilent R T</p> <p>Ch Freq 5.21 GHz Trig Free</p> <p>Channel Power</p> <p>Span 160.000000 MHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Avg Log 10 dB/Offset 1 dB</p> <p>Center 5.21 GHz Span 160 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <table border="1"> <tr> <td>Channel Power</td> <td>Power Spectral Density</td> </tr> <tr> <td>12.62 dBm / 80.0000 MHz</td> <td>-66.41 dBm/Hz</td> </tr> </table> <p>Trace/View</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>	Channel Power	Power Spectral Density	12.62 dBm / 80.0000 MHz	-66.41 dBm/Hz
Channel Power	Power Spectral Density				
12.62 dBm / 80.0000 MHz	-66.41 dBm/Hz				

5725-5850MHz

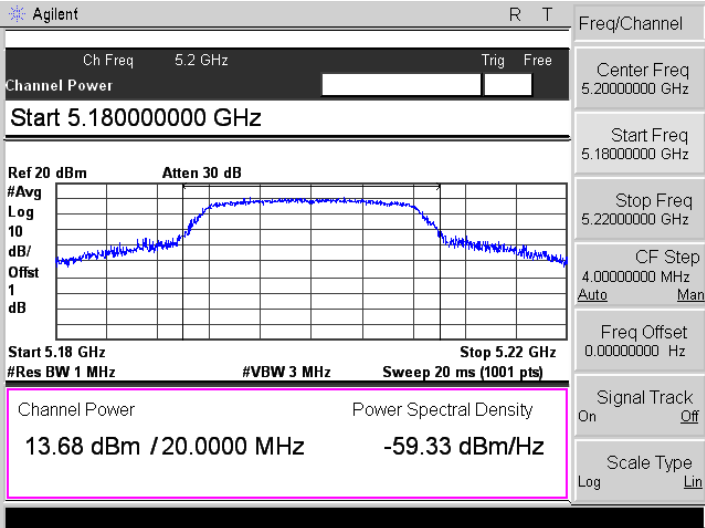
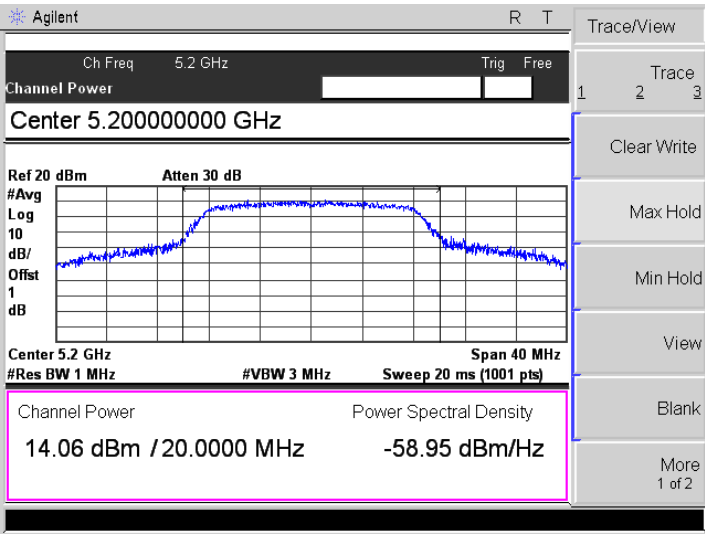
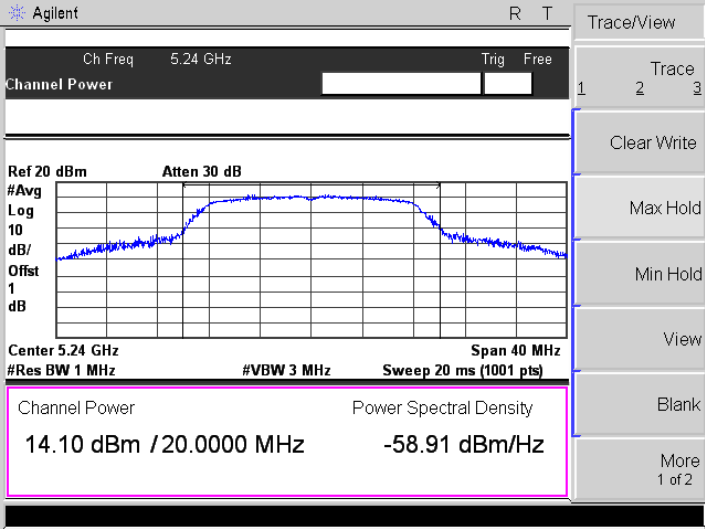
<p>802.11a-Low</p>	<p>Agilent R T</p> <p>Ch Freq 5.745 GHz Trig Free</p> <p>Channel Power</p> <p>Center 5.74500000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/Offst 1 dB</p> <p>Center 5.745 GHz Span 40 MHz #Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>14.23 dBm / 20.0000 MHz -58.78 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 5.74500000 GHz</p> <p>Start Freq 5.72500000 GHz</p> <p>Stop Freq 5.76500000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11a-Middle</p>	<p>Agilent R T</p> <p>Ch Freq 5.785 GHz Trig Free</p> <p>Channel Power</p> <p>Center 5.78500000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/Offst 1 dB</p> <p>Center 5.785 GHz Span 40 MHz #Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>14.46 dBm / 20.0000 MHz -58.55 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 5.78500000 GHz</p> <p>Start Freq 5.76500000 GHz</p> <p>Stop Freq 5.80500000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11a-High</p>	<p>Agilent R T</p> <p>Ch Freq 5.825 GHz Trig Free</p> <p>Channel Power</p> <p>Center 5.825 GHz Span 40 MHz #Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>14.30 dBm / 20.0000 MHz -58.71 dBm/Hz</p> <p>Trace/View</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>

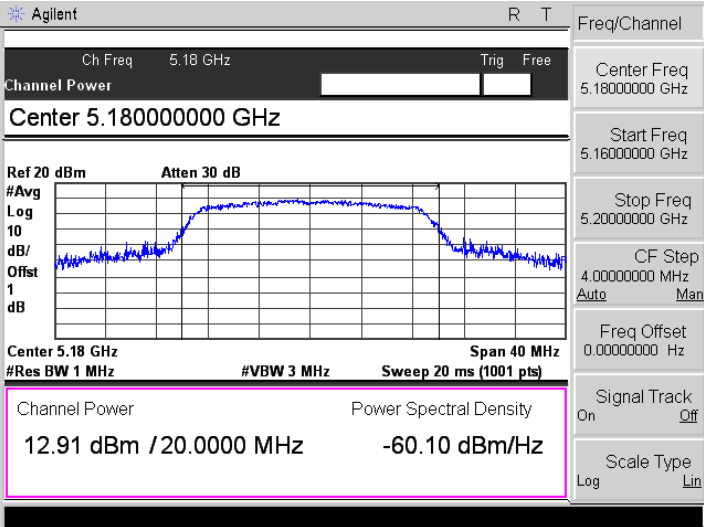
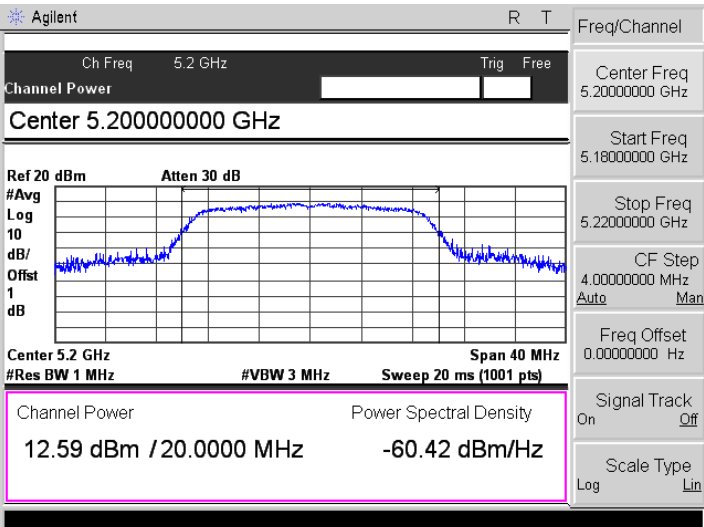
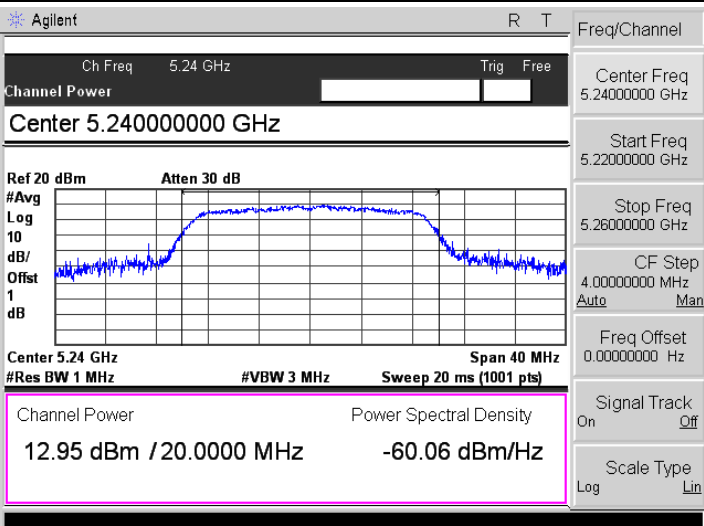
<p>802.11n-HT20-Low</p>	 <p>Agilent R T</p> <p>Ch Freq 5.745 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/Offset 1 dB</p> <p>Center 5.745 GHz Span 40 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>12.78 dBm / 20.0000 MHz -60.23 dBm/Hz</p> <p>Trace/View</p> <p>1 2 3</p> <p>Trace</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
<p>802.11n-HT20-Middle</p>	 <p>Agilent R T</p> <p>Ch Freq 5.785 GHz Trig Free</p> <p>Channel Power</p> <p>Center 5.78500000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/Offset 1 dB</p> <p>Center 5.785 GHz Span 40 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>12.83 dBm / 20.0000 MHz -60.18 dBm/Hz</p> <p>Trace/View</p> <p>1 2 3</p> <p>Trace</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
<p>802.11n-HT20-High</p>	 <p>Agilent R T</p> <p>Ch Freq 5.825 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/Offset 1 dB</p> <p>Center 5.825 GHz Span 40 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>13.22 dBm / 20.0000 MHz -59.79 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 5.82500000 GHz</p> <p>Start Freq 5.80500000 GHz</p> <p>Stop Freq 5.84500000 GHz</p> <p>CF Step 4.00000000 MHz</p> <p>Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

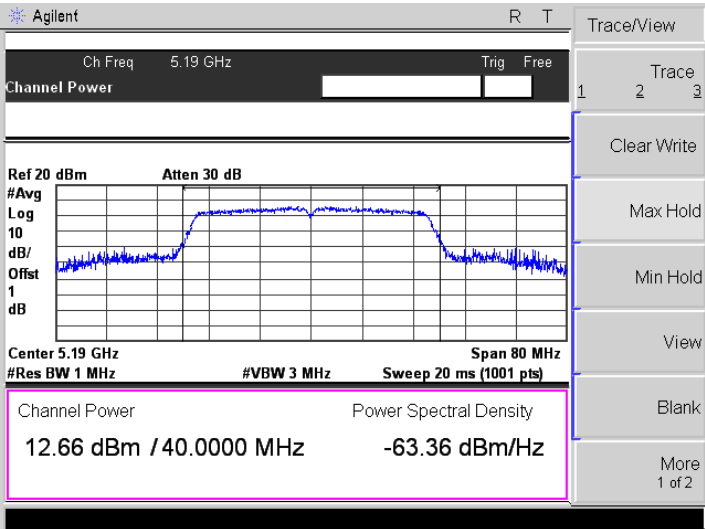
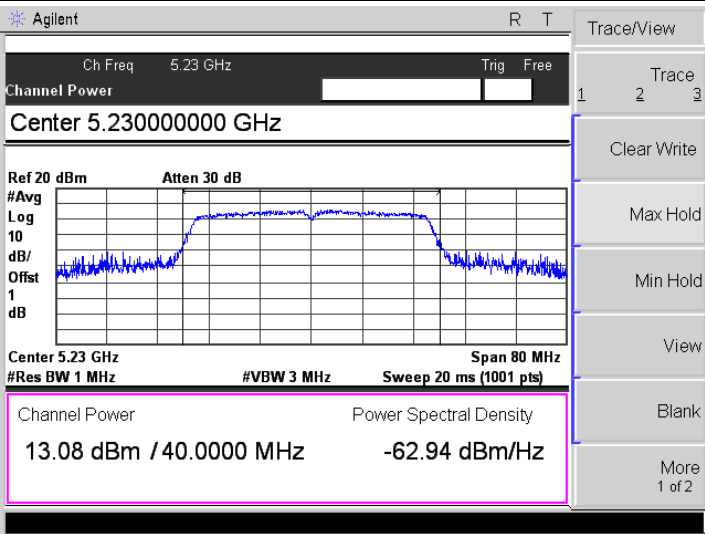
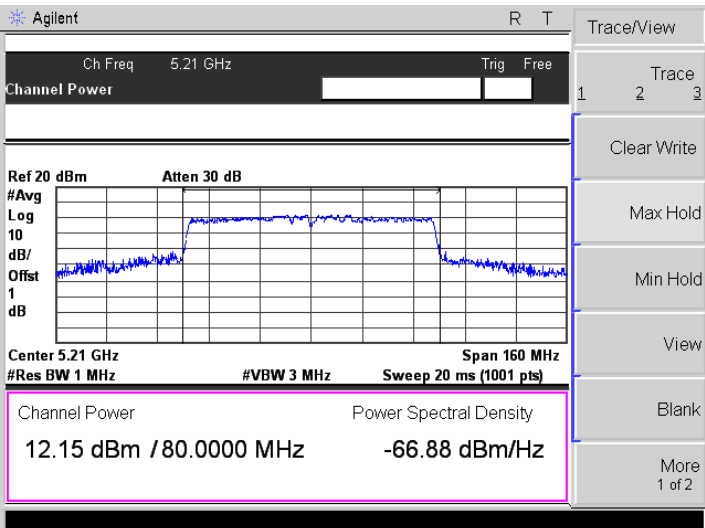
<p>802.11n-HT40-Low</p>	 <p>Agilent R T</p> <p>Ch Freq 5.755 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/Offset 1 dB</p> <p>Center 5.755 GHz Span 80 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <table border="1"> <tr> <td>Channel Power</td> <td>Power Spectral Density</td> </tr> <tr> <td>12.68 dBm / 40.0000 MHz</td> <td>-63.34 dBm/Hz</td> </tr> </table> <p>Trace/View</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>	Channel Power	Power Spectral Density	12.68 dBm / 40.0000 MHz	-63.34 dBm/Hz
Channel Power	Power Spectral Density				
12.68 dBm / 40.0000 MHz	-63.34 dBm/Hz				
<p>802.11n-HT40-High</p>	 <p>Agilent R T</p> <p>Ch Freq 5.795 GHz Trig Free</p> <p>Channel Power</p> <p>Center 5.79500000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/Offset 1 dB</p> <p>Center 5.795 GHz Span 80 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <table border="1"> <tr> <td>Channel Power</td> <td>Power Spectral Density</td> </tr> <tr> <td>12.72 dBm / 40.0000 MHz</td> <td>-63.30 dBm/Hz</td> </tr> </table> <p>Freq/Channel</p> <p>Center Freq 5.79500000 GHz</p> <p>Start Freq 5.75500000 GHz</p> <p>Stop Freq 5.83500000 GHz</p> <p>CF Step 8.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>	Channel Power	Power Spectral Density	12.72 dBm / 40.0000 MHz	-63.30 dBm/Hz
Channel Power	Power Spectral Density				
12.72 dBm / 40.0000 MHz	-63.30 dBm/Hz				
<p>802.11ac-HT80</p>	 <p>Agilent R T</p> <p>Ch Freq 5.775 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/Offset 1 dB</p> <p>Center 5.775 GHz Span 160 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <table border="1"> <tr> <td>Channel Power</td> <td>Power Spectral Density</td> </tr> <tr> <td>11.91 dBm / 80.0000 MHz</td> <td>-67.12 dBm/Hz</td> </tr> </table> <p>Trace/View</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>	Channel Power	Power Spectral Density	11.91 dBm / 80.0000 MHz	-67.12 dBm/Hz
Channel Power	Power Spectral Density				
11.91 dBm / 80.0000 MHz	-67.12 dBm/Hz				

ANT 1

5150-5250MHz

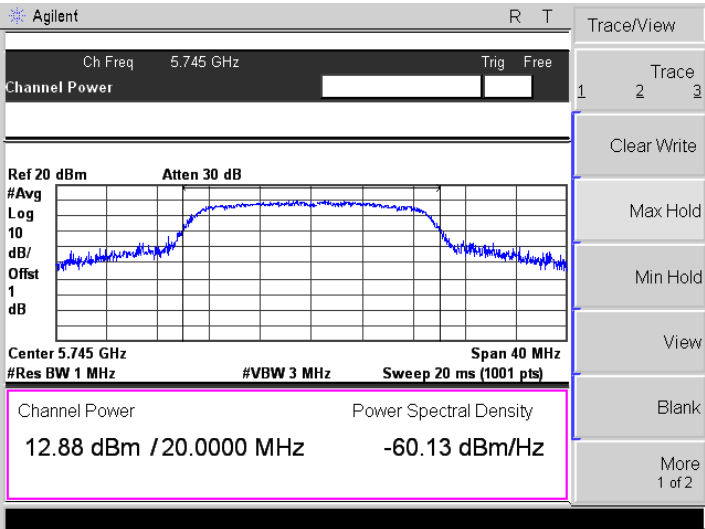
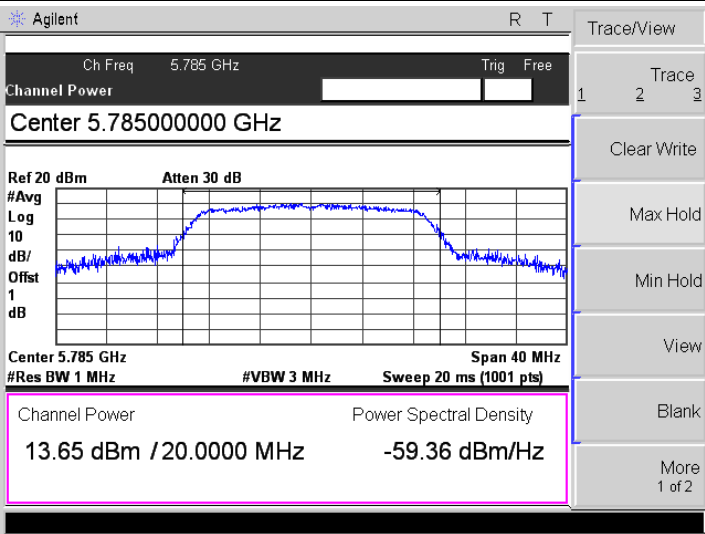
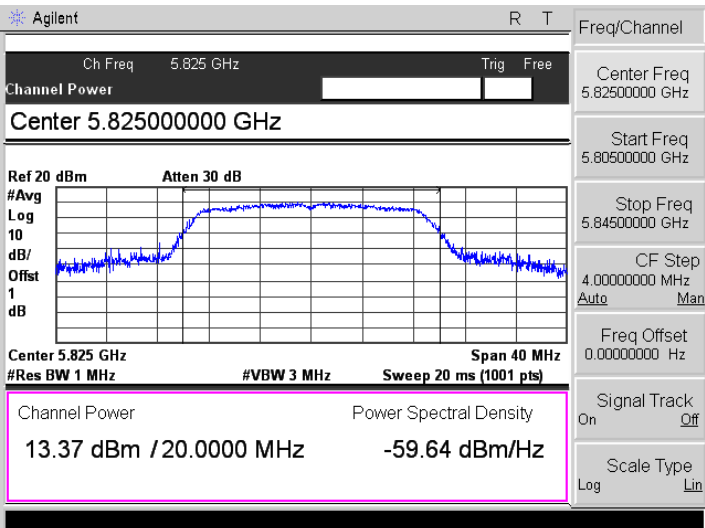
<p>802.11a-Low</p>	
<p>802.11a-Middle</p>	
<p>802.11a-High</p>	

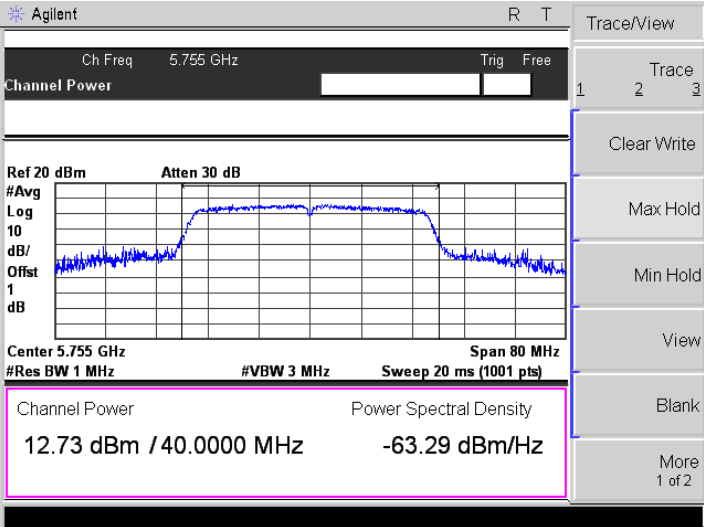
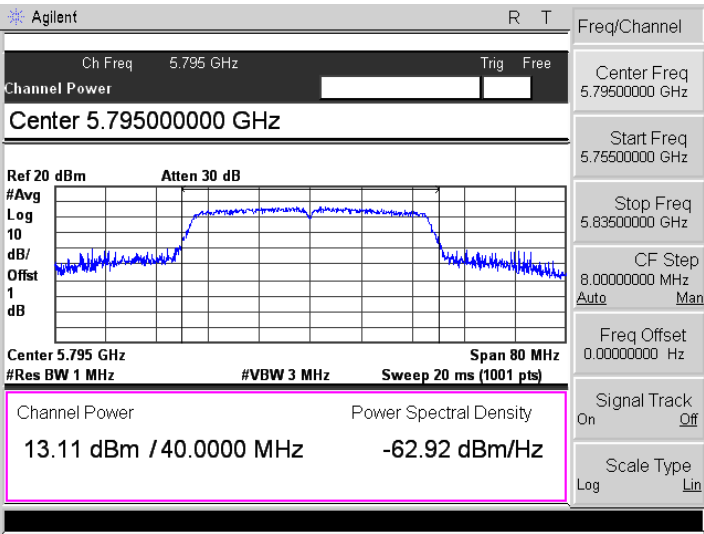
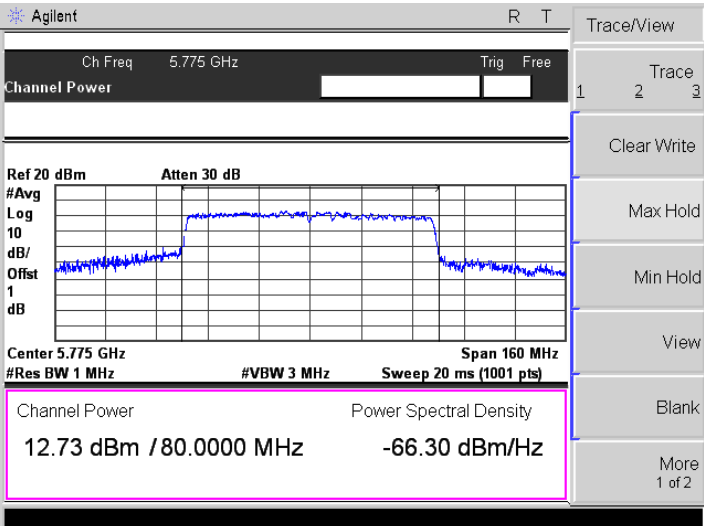
<p>802.11n-HT20-Low</p>	 <p>Agilent R T</p> <p>Ch Freq 5.18 GHz Trig Free</p> <p>Channel Power</p> <p>Center 5.18000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/Offset 1 dB</p> <p>Center 5.18 GHz Span 40 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>12.91 dBm / 20.0000 MHz -60.10 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 5.18000000 GHz</p> <p>Start Freq 5.16000000 GHz</p> <p>Stop Freq 5.20000000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT20-Middle</p>	 <p>Agilent R T</p> <p>Ch Freq 5.2 GHz Trig Free</p> <p>Channel Power</p> <p>Center 5.20000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/Offset 1 dB</p> <p>Center 5.2 GHz Span 40 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>12.59 dBm / 20.0000 MHz -60.42 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 5.20000000 GHz</p> <p>Start Freq 5.18000000 GHz</p> <p>Stop Freq 5.22000000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT20-High</p>	 <p>Agilent R T</p> <p>Ch Freq 5.24 GHz Trig Free</p> <p>Channel Power</p> <p>Center 5.24000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/Offset 1 dB</p> <p>Center 5.24 GHz Span 40 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>12.95 dBm / 20.0000 MHz -60.06 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 5.24000000 GHz</p> <p>Start Freq 5.22000000 GHz</p> <p>Stop Freq 5.26000000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

<p>802.11n-HT40-Low</p>	
<p>802.11n-HT40-High</p>	
<p>802.11ac-HT80</p>	

5725-5850MHz

<p>802.11a-Low</p>	<p>Agilent R T</p> <p>Ch Freq 5.745 GHz Trig Free</p> <p>Channel Power</p> <p>Center 5.74500000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/Offst 1 dB</p> <p>Center 5.745 GHz Span 40 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>14.12 dBm / 20.0000 MHz -58.89 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 5.74500000 GHz</p> <p>Start Freq 5.72500000 GHz</p> <p>Stop Freq 5.76500000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11a-Middle</p>	<p>Agilent R T</p> <p>Ch Freq 5.785 GHz Trig Free</p> <p>Channel Power</p> <p>Center 5.78500000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/Offst 1 dB</p> <p>Center 5.785 GHz Span 40 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>14.57 dBm / 20.0000 MHz -58.44 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 5.78500000 GHz</p> <p>Start Freq 5.76500000 GHz</p> <p>Stop Freq 5.80500000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11a-High</p>	<p>Agilent R T</p> <p>Ch Freq 5.825 GHz Trig Free</p> <p>Channel Power</p> <p>Center 5.825 GHz Span 40 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>14.67 dBm / 20.0000 MHz -58.34 dBm/Hz</p> <p>Trace/View</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>

<p>802.11n-HT20-Low</p>	
<p>802.11n-HT20-Middle</p>	
<p>802.11n-HT20-High</p>	

<p>802.11n-HT40-Low</p>	
<p>802.11n-HT40-High</p>	
<p>802.11ac-HT80</p>	

APPENDIX D

Frequency Stability

ANT 0

U-NII-1:5150-5250MHz worst case at 802.11a middle channel				
Voltage(%)	Power(VDC)	TEMP(°C)	Freq.Dev(Hz)	Deviation
100%	120	-30	1498	0.2881
100%		-20	1276	0.2454
100%		-10	1442	0.2773
100%		0	1341	0.2580
100%		+10	1210	0.2327
100%		+20	1522	0.2927
100%		+30	1034	0.1988
100%		+40	1559	0.2998
100%		+50	1324	0.2546
Low Battery power		102	+20	1565
High Battery power	138	+20	1495	0.2876

U-NII-1:5725-5850MHz worst case at 802.11a middle channel				
Voltage(%)	Power(VDC)	TEMP(°C)	Freq.Dev(Hz)	Deviation
100%	120	-30	1497	0.2587
100%		-20	1279	0.2211
100%		-10	1447	0.2502
100%		0	1342	0.2320
100%		+10	1215	0.2101
100%		+20	1517	0.2622
100%		+30	1040	0.1798
100%		+40	1563	0.2701
100%		+50	1324	0.2289
Low Battery power		102	+20	1569
High Battery power	138	+20	1491	0.2577

ANT 1

U-NII-1:5150-5250MHz worst case at 802.11a middle channel				
Voltage(%)	Power(VDC)	TEMP(°C)	Freq.Dev(Hz)	Deviation
100%	120	-30	1497	0.2880
100%		-20	1277	0.2457
100%		-10	1445	0.2780
100%		0	1336	0.2569
100%		+10	1218	0.2342
100%		+20	1517	0.2918
100%		+30	1034	0.1988
100%		+40	1560	0.3000
100%		+50	1320	0.2539
Low Battery power		102	+20	1569
High Battery power	138	+20	1494	0.2873

U-NII-1:5725-5850MHz worst case at 802.11a middle channel				
Voltage(%)	Power(VDC)	TEMP(°C)	Freq.Dev(Hz)	Deviation
100%	120	-30	1491	0.2577
100%		-20	1278	0.2209
100%		-10	1447	0.2501
100%		0	1341	0.2318
100%		+10	1220	0.2108
100%		+20	1515	0.2619
100%		+30	1031	0.1783
100%		+40	1564	0.2704
100%		+50	1322	0.2286
Low Battery power		102	+20	1562
High Battery power	138	+20	1489	0.2573

APPENDIX PHOTOGRAPHS

Please refer to “ANNEX”

******* END OF REPORT *******