

# PCB Type Antenna

ANTX100P002B24553 Series



## Features and Benefits

- Ⓢ The smallest PCB antenna in the market
- Ⓢ Miniature design allows users to save required space
- Ⓢ Double-side adhesive tape makes it easy to instal in device
- Ⓢ Ranges of types of connector and cable provide a flexible design options
- Ⓢ Halogen free and RoHS compliant

All part numbers are identified by the series, packing type, material, size, antenna type, working frequency and packing quantity.

**YAGEO BRAND ordering code**  
**GLOBAL PART NUMBER (PREFERRED)**

**ANT X100 P 002 B 2455 3**

(1) (2) (3) (4) (5) (6) (7)

(1) FAMILY

ANT = Antenna products

(2) CONNECTOR & CABLE LENGTH (MM)

X = I-PEX

100 = 100mm

(3) ANTENNA TYPE

P=PCB

(4) SERIAL NUMBER

002 = SERIAL NUMBER 002

(5) PACKAGE TYPE

B = Bulk

(6) WORKING FREQUENCY

2455 = 2.40 ~ 2.50 GHz / 5.150 ~ 5.875 GHz

(7) CABLE TYPE

3 = 1.13mm diameter Mini-Coaxial Cable

## Applications

- Ⓢ Tablet / Desktop PC
- Ⓢ Internet TV / STB /
- Ⓢ Game console / Camera
- Ⓢ WiFi network devices  
(IEEE 802.11b/g/n)
- Ⓢ Bluetooth / ZigBee devices
- Ⓢ Car Infotainment
- Ⓢ Smart meter
- Ⓢ Lighting control
- Ⓢ POS terminal
- Ⓢ Wireless Industrial Control

# PCB Type Antenna

ANTX100P002B24553 Series

## Specifications

Table 1

DESCRIPTION	VALUE
Working Frequency	2.40 ~ 2.50 GHz / 5.150 ~ 5.875 GHz
VSWR	2.5:1max / 2.5:1 max
Peak Gain	0.7 dBi / 1.9 dBi
Polarization	Linear
Radiation Pattern	Omni-directional
Impedance	50 $\Omega$ Nominal
Operating Temperature	- 40 °C to 85 °C
Maximum Power	1 W
Dimension (PCB+AL Foil)	40mm x 43mm x 0.55mm
Radio Connector	I-PEX (20278-112R-13)
Cable Diameter / Length / Color	1.13mm / 100mm / Black
Mounting	Adhesive Tape (HF-DS)

## Dimensions

Table 2 Mechanical Dimensions

### DIMENSION VALUE

L (mm)	100 ± 3.00
W (mm)	40 ± 0.30
H (mm)	8 ± 0.30
H1 (mm)	32 ± 0.30
T (mm)	0.55 ± 0.15
A (mm)	2.30 Max
T1 (mm)	0.15 ± 0.05

## Outlines

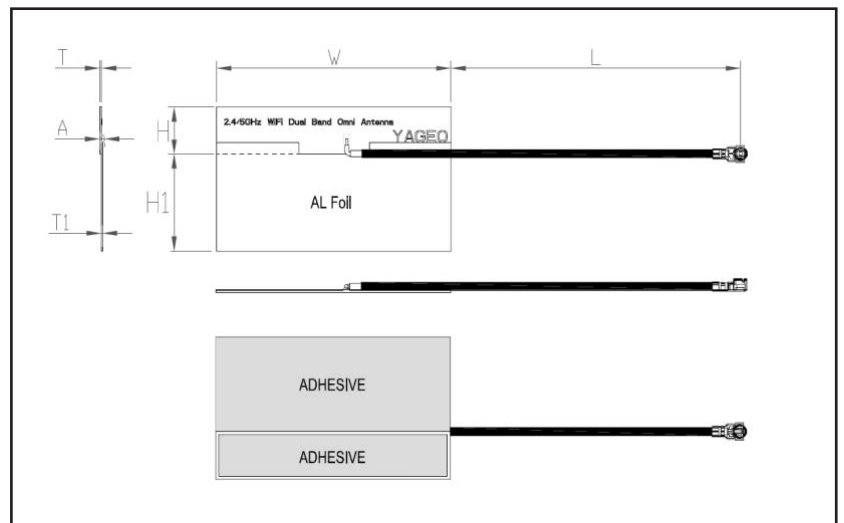


Fig 1. Antenna Outlines


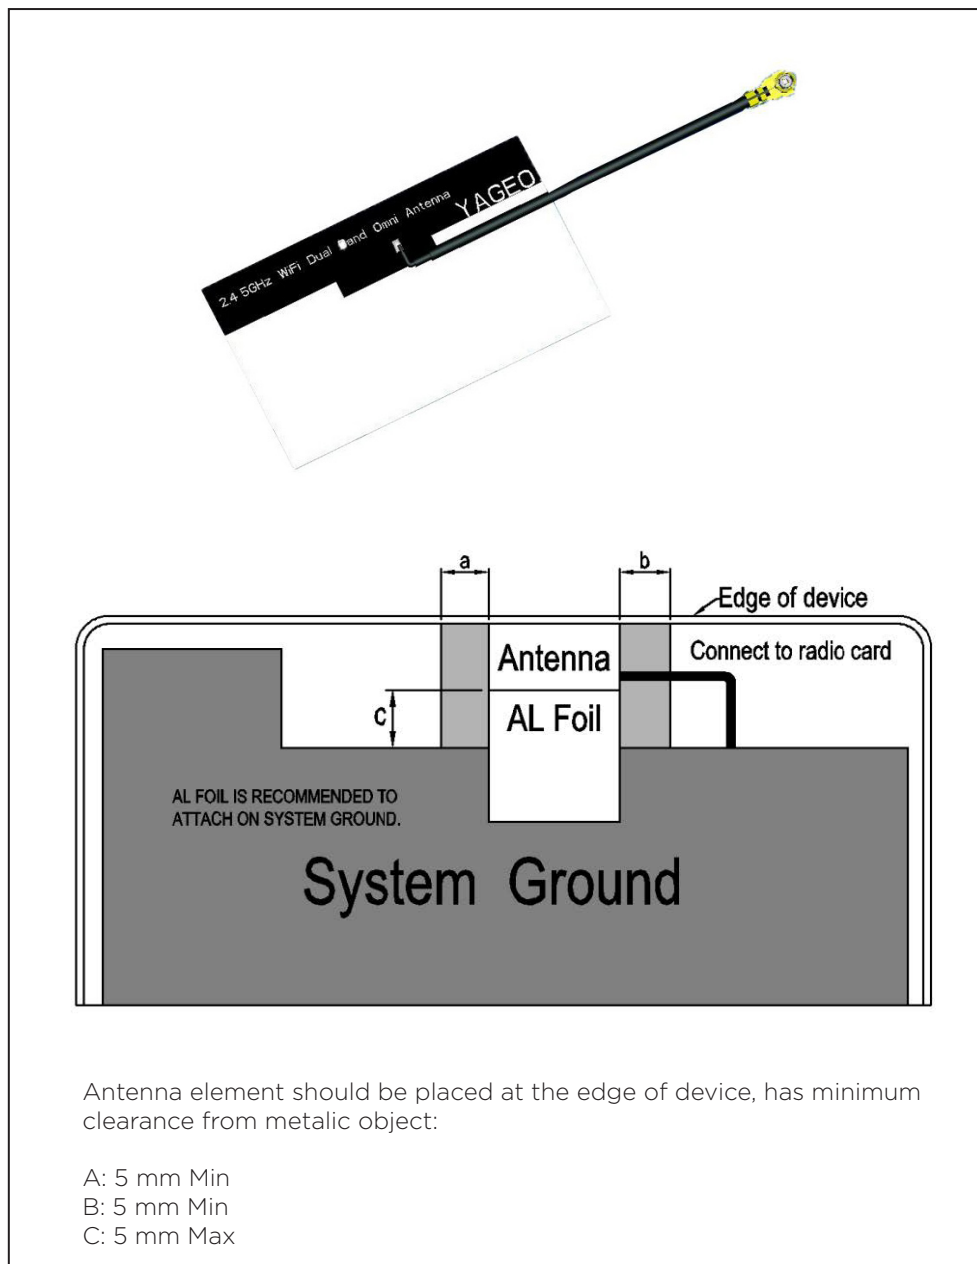



Fig. 2 Application Instruction

## Return Loss & VSWR

Return Loss (dB)

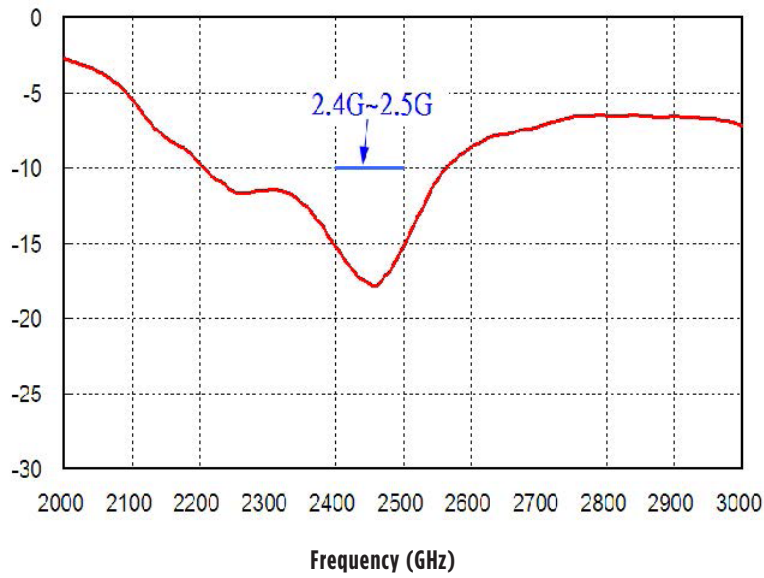

VSWR

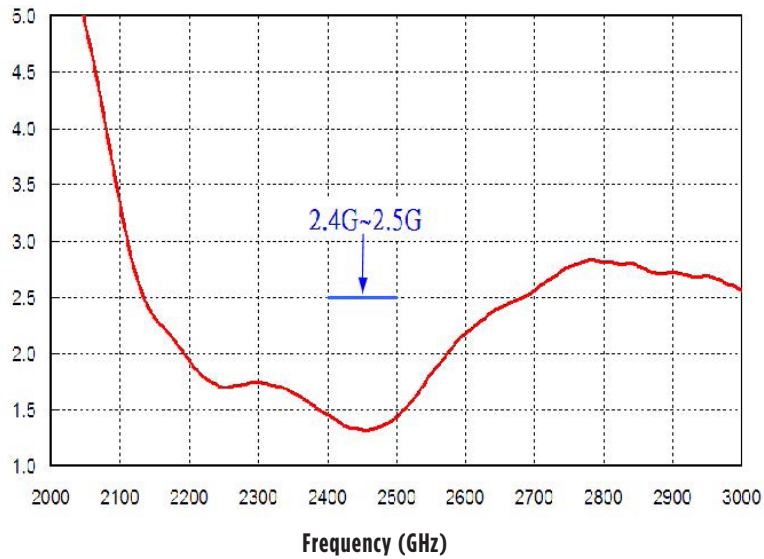

## Antenna Radiation Patterns

FREQUENCY (GHz)	AVERAGE GAIN (dBi)	EFFICIENCY (%)	PEAK GAIN (dBi)
2.40	-2.1	61.2	0.4
2.45	-1.7	68.2	0.7
2.50	-2.1	61.1	0.9

Scale: 5 dBi / div Max : 5 dBi Min : -25 dBi

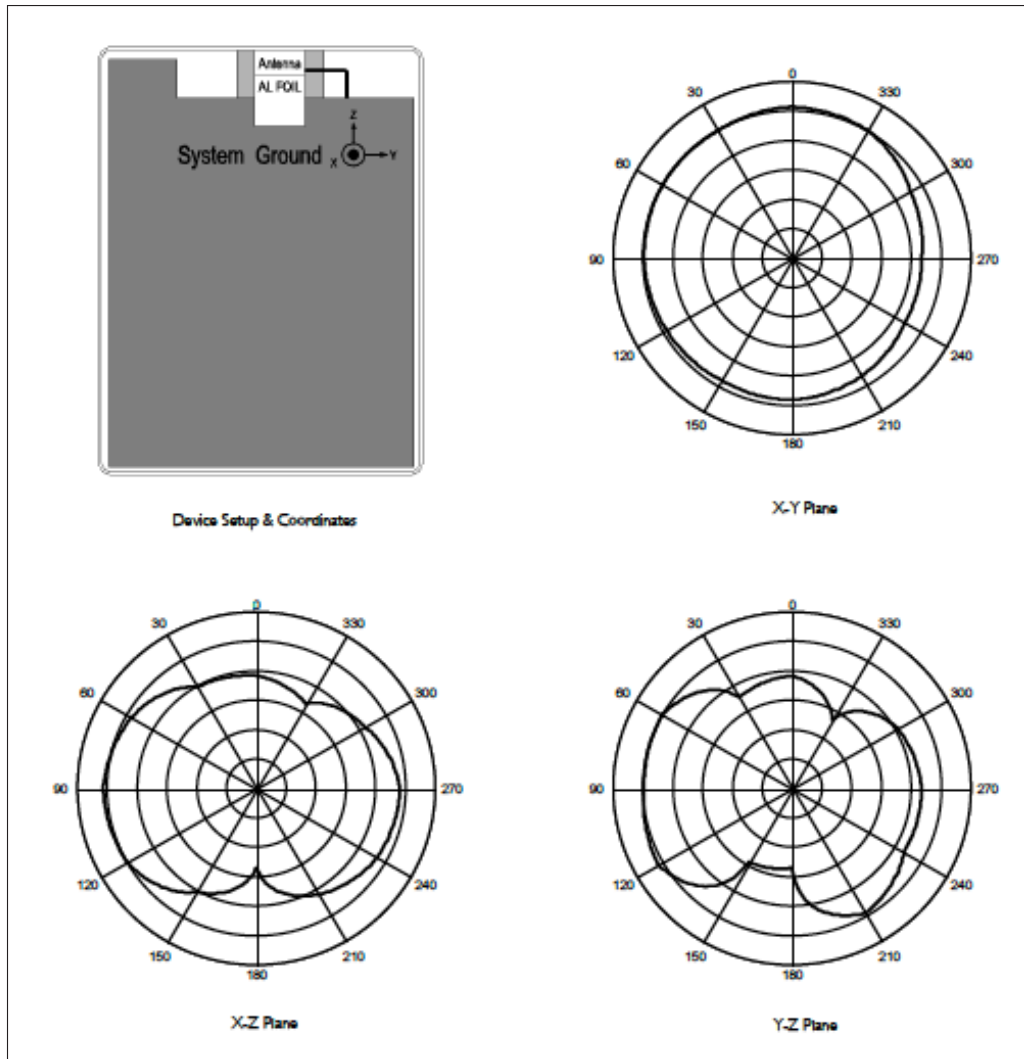


Fig. 4 Antenna radiation patterns at 2.45 GHz

# PCB Type Antenna

ANTX100P002B24553 Series

## Antenna Radiation Patterns

FREQUENCY (GHz)	AVERAGE GAIN (dBi)	EFFICIENCY (%)	PEAK GAIN (dBi)
5.150	-3.9	41.0	2.3
5.350	-3.6	43.3	1.9
5.470	-4.4	40.4	1.0
5.725	-4.5	40.1	0.5
5.875	-4.1	40.9	0.4

Scale: 5 dBi / div Max : 5 dBi Min : -25 dBi

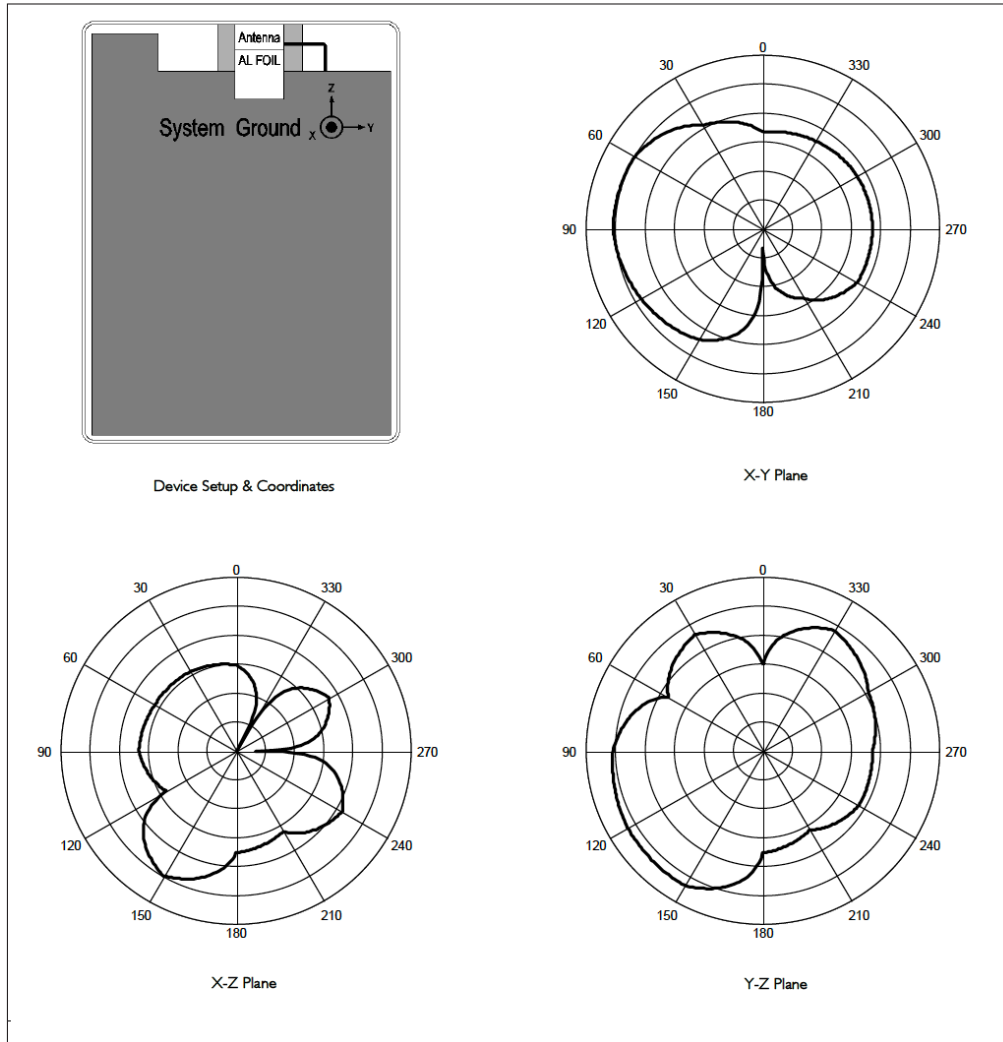


Fig. 5 Antenna radiation patterns at 5.350 GHz

### For More Information:

Americas - [proinfo\\_power\\_americas@yageo.com](mailto:proinfo_power_americas@yageo.com) | Europe - [proinfo\\_power\\_emea@yageo.com](mailto:proinfo_power_emea@yageo.com) | Asia - [proinfo\\_power\\_asia@yageo.com](mailto:proinfo_power_asia@yageo.com)

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2023. Pulse Electronics, Inc. All rights reserved.

YAGEO Corporation and its affiliates do not recommend the use of commercial or automotive grade products for high reliability applications or manned space flight.