

1#_WLAN 2.4GHz_802.11b 1Mbps_Front_0mm_Ch6

Communication System: UID 0, WIFI2.4G (0); Frequency: 2437 MHz;Duty Cycle: 1:1.016

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.862$ S/m; $\epsilon_r = 38.403$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(7.27, 7.27, 7.27); Calibrated: 3/26/2024;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 3/26/2024
- Phantom: ELI V8.0; Type: QD OVA 004 Ax; Serial: 2095
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

Area Scan (11x13x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0884 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.637 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.0980 W/kg

SAR(1 g) = 0.063 W/kg; SAR(10 g) = 0.039 W/kg

Maximum value of SAR (measured) = 0.0852 W/kg

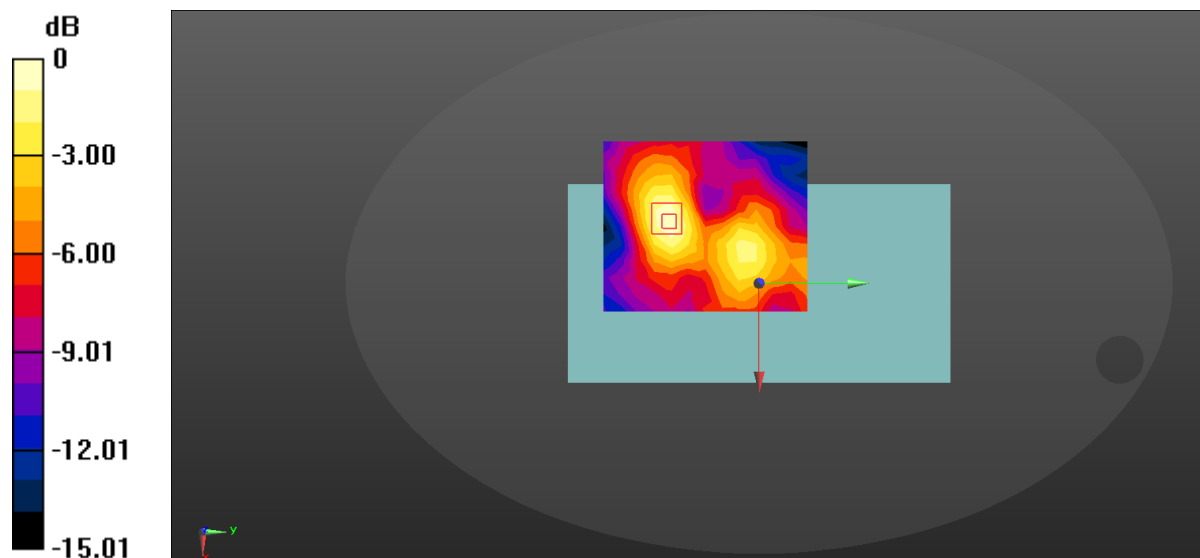

0 dB = 0.0884 W/kg = -10.54 dBW/kg

2#_WLAN 2.4GHz_802.11b 1Mbps_Back_0mm_Ch6

Communication System: UID 0, WIFI2.4G (0); Frequency: 2437 MHz; Duty Cycle: 1:1.016

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.862$ S/m; $\epsilon_r = 38.403$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(7.27, 7.27, 7.27); Calibrated: 3/26/2024;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 3/26/2024
- Phantom: ELI V8.0; Type: QD OVA 004 Ax; Serial: 2095
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

Area Scan (11x13x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.194 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.415 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.297 W/kg

SAR(1 g) = 0.164 W/kg; SAR(10 g) = 0.079 W/kg

Maximum value of SAR (measured) = 0.244 W/kg

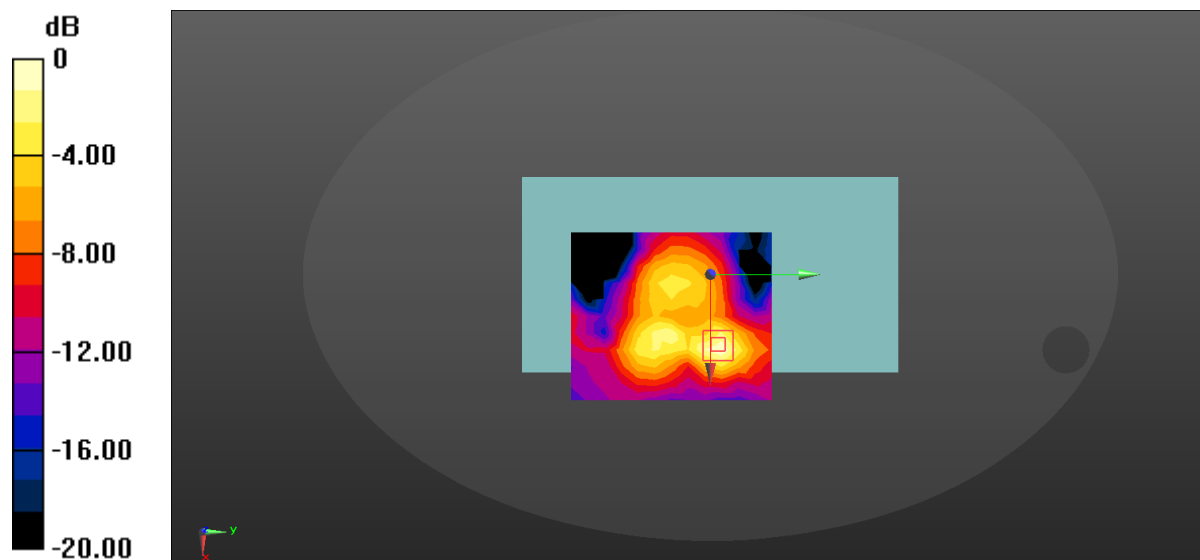

$$0 \text{ dB} = 0.244 \text{ W/kg} = -6.13 \text{ dBW/kg}$$

3#_WLAN 2.4GHz_802.11b 1Mbps_Back_0mm_Ch1

Communication System: UID 0, WIFI2.4G (0); Frequency: 2412 MHz; Duty Cycle: 1:1.016

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.833$ S/m; $\epsilon_r = 38.511$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(7.27, 7.27, 7.27); Calibrated: 3/26/2024;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 3/26/2024
- Phantom: ELI V8.0; Type: QD OVA 004 Ax; Serial: 2095
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

Area Scan (11x13x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.202 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.644 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.256 W/kg

SAR(1 g) = 0.156 W/kg; SAR(10 g) = 0.088 W/kg

Maximum value of SAR (measured) = 0.218 W/kg

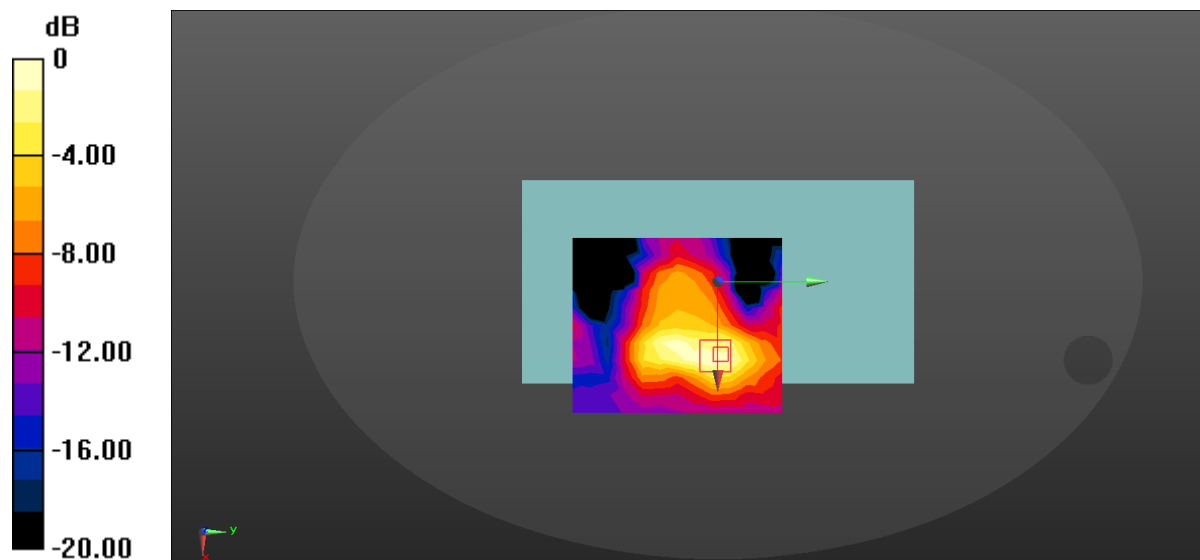

$$0 \text{ dB} = 0.218 \text{ W/kg} = -6.62 \text{ dBW/kg}$$

4#_WLAN 2.4GHz_802.11b 1Mbps_Back_0mm_Ch13

Communication System: UID 0, WIFI2.4G (0); Frequency: 2462 MHz; Duty Cycle: 1:1.016

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.891$ S/m; $\epsilon_r = 38.296$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(7.27, 7.27, 7.27); Calibrated: 3/26/2024;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 3/26/2024
- Phantom: ELI V8.0; Type: QD OVA 004 Ax; Serial: 2095
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

Area Scan (11x13x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.109 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.845 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.125 W/kg

SAR(1 g) = 0.077 W/kg; SAR(10 g) = 0.050 W/kg

Maximum value of SAR (measured) = 0.108 W/kg

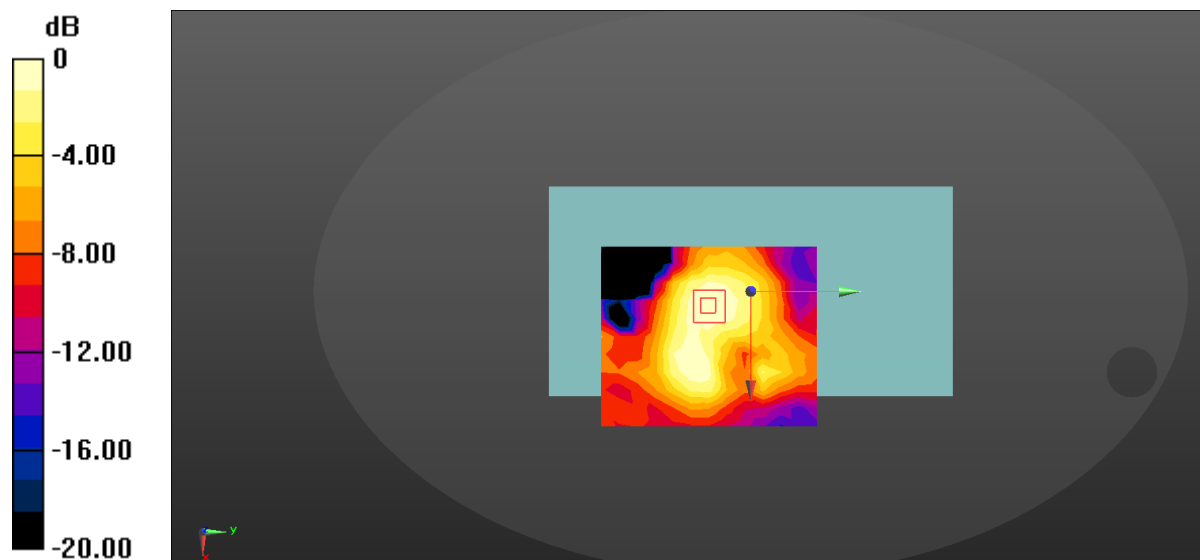

$$0 \text{ dB} = 0.109 \text{ W/kg} = -9.63 \text{ dBW/kg}$$

5#_WLAN 5.2GHz_802.11a 6Mbps_Front_0mm_Ch40

Communication System: UID 0, WIFI 5G (0); Frequency: 5200 MHz;Duty Cycle: 1:1.055

Medium parameters used: $f = 5200$ MHz; $\sigma = 4.68$ S/m; $\epsilon_r = 37.551$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(5.25, 5.25, 5.25); Calibrated: 3/26/2024;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 3/26/2024
- Phantom: ELI V8.0; Type: QD OVA 004 Ax; Serial: 2095
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

Area Scan (12x15x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.176 W/kg


Zoom Scan (9x9x17)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 3.189 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.232 W/kg

SAR(1 g) = 0.110 W/kg; SAR(10 g) = 0.063 W/kg

Maximum value of SAR (measured) = 0.183 W/kg

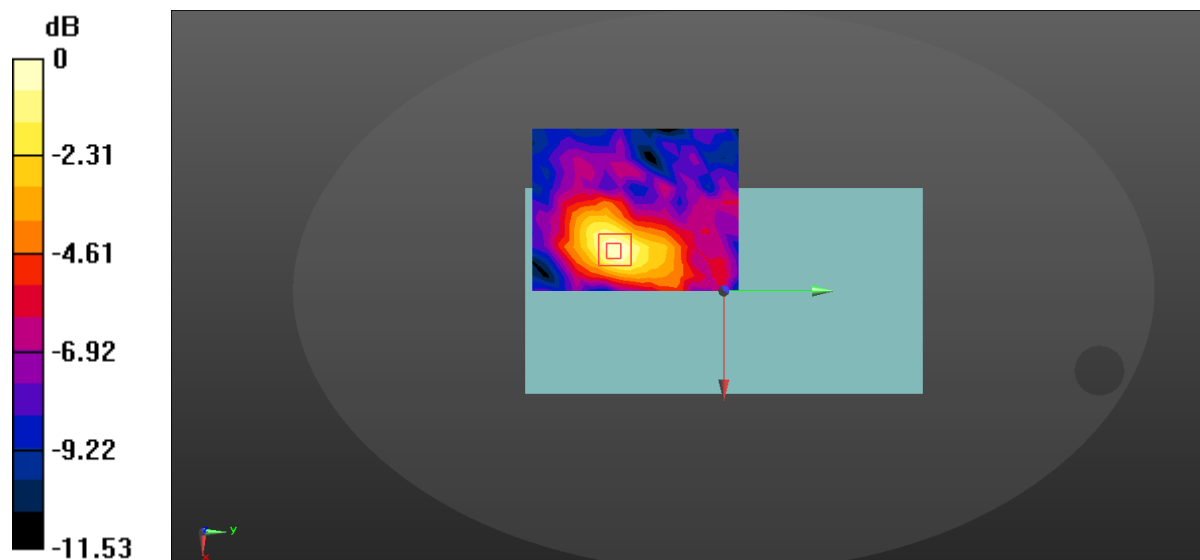

0 dB = 0.183 W/kg = -7.38 dBW/kg

6#_WLAN 5.2GHz_802.11a 6Mbps_Back_0mm_Ch40

Communication System: UID 0, WIFI 5G (0); Frequency: 5200 MHz; Duty Cycle: 1:1.055

Medium parameters used: $f = 5200$ MHz; $\sigma = 4.68$ S/m; $\epsilon_r = 37.551$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(5.25, 5.25, 5.25); Calibrated: 3/26/2024;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 3/26/2024
- Phantom: ELI V8.0; Type: QD OVA 004 Ax; Serial: 2095
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

Area Scan (13x15x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.216 W/kg


Zoom Scan (9x9x17)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.300 W/kg

SAR(1 g) = 0.115 W/kg; SAR(10 g) = 0.049 W/kg

Maximum value of SAR (measured) = 0.213 W/kg

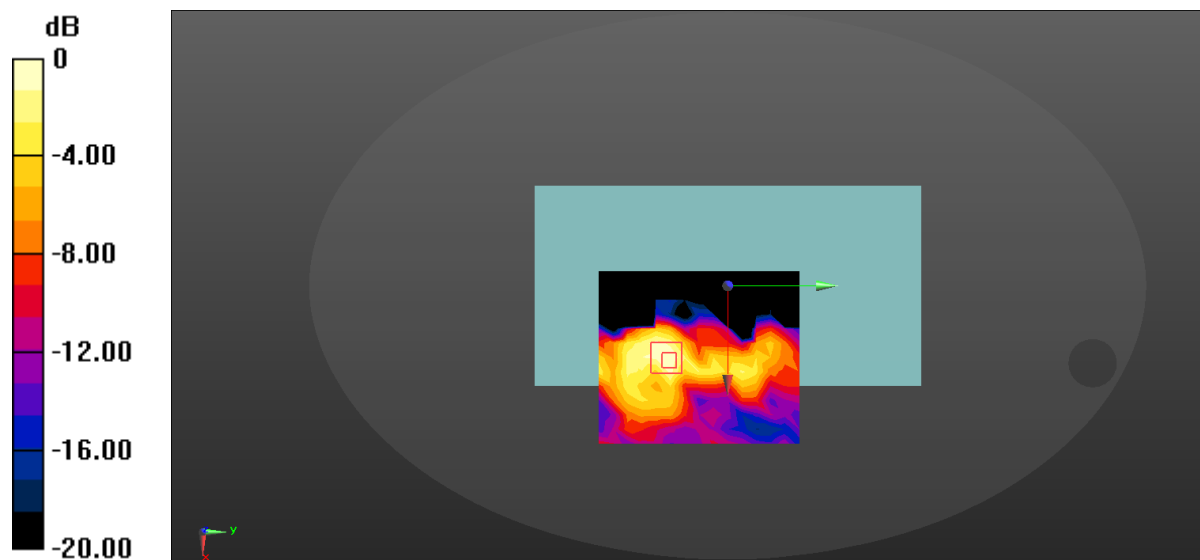

$$0 \text{ dB} = 0.216 \text{ W/kg} = -6.66 \text{ dBW/kg}$$

7#_WLAN 5.2GHz_802.11a 6Mbps_Back_0mm_Ch36

Communication System: UID 0, WIFI 5G (0); Frequency: 5180 MHz;Duty Cycle: 1:1.055

Medium parameters used: $f = 5180$ MHz; $\sigma = 4.661$ S/m; $\epsilon_r = 37.577$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(5.25, 5.25, 5.25); Calibrated: 3/26/2024;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 3/26/2024
- Phantom: ELI V8.0; Type: QD OVA 004 Ax; Serial: 2095
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

Area Scan (11x15x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.221 W/kg


Zoom Scan (9x9x17)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.282 W/kg

SAR(1 g) = 0.117 W/kg; SAR(10 g) = 0.046 W/kg

Maximum value of SAR (measured) = 0.214 W/kg

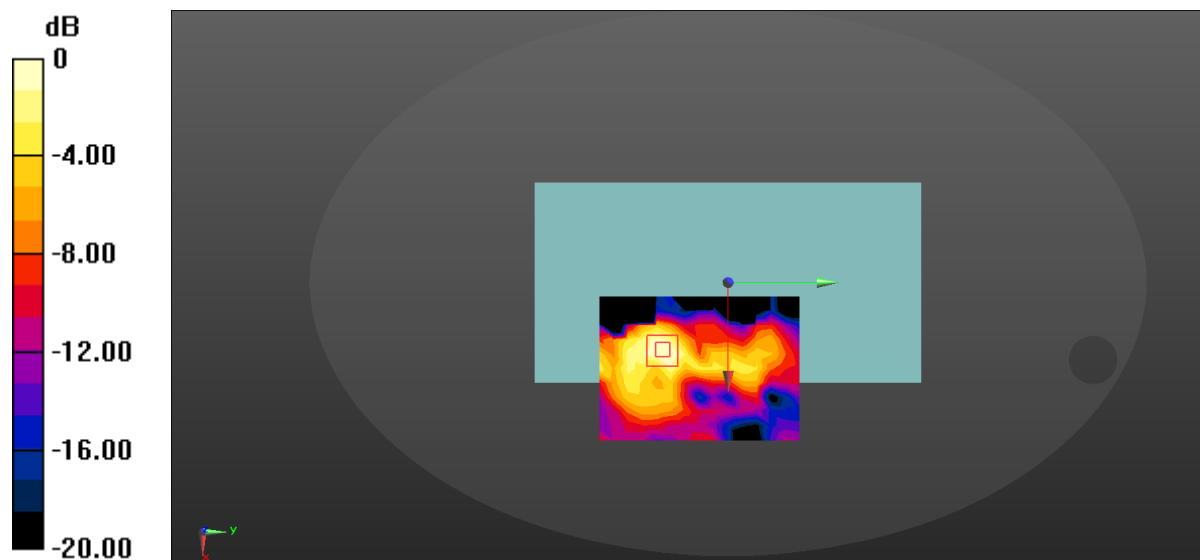

$$0 \text{ dB} = 0.221 \text{ W/kg} = -6.56 \text{ dBW/kg}$$

8#_WLAN 5.2GHz_802.11a 6Mbps_Back_0mm_Ch48

Communication System: UID 0, WIFI 5G (0); Frequency: 5240 MHz;Duty Cycle: 1:1.055

Medium parameters used: $f = 5240$ MHz; $\sigma = 4.723$ S/m; $\epsilon_r = 37.491$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(5.25, 5.25, 5.25); Calibrated: 3/26/2024;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 3/26/2024
- Phantom: ELI V8.0; Type: QD OVA 004 Ax; Serial: 2095
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

Area Scan (11x15x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.238 W/kg


Zoom Scan (9x9x17)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.340 W/kg

SAR(1 g) = 0.137 W/kg; SAR(10 g) = 0.055 W/kg

Maximum value of SAR (measured) = 0.264 W/kg

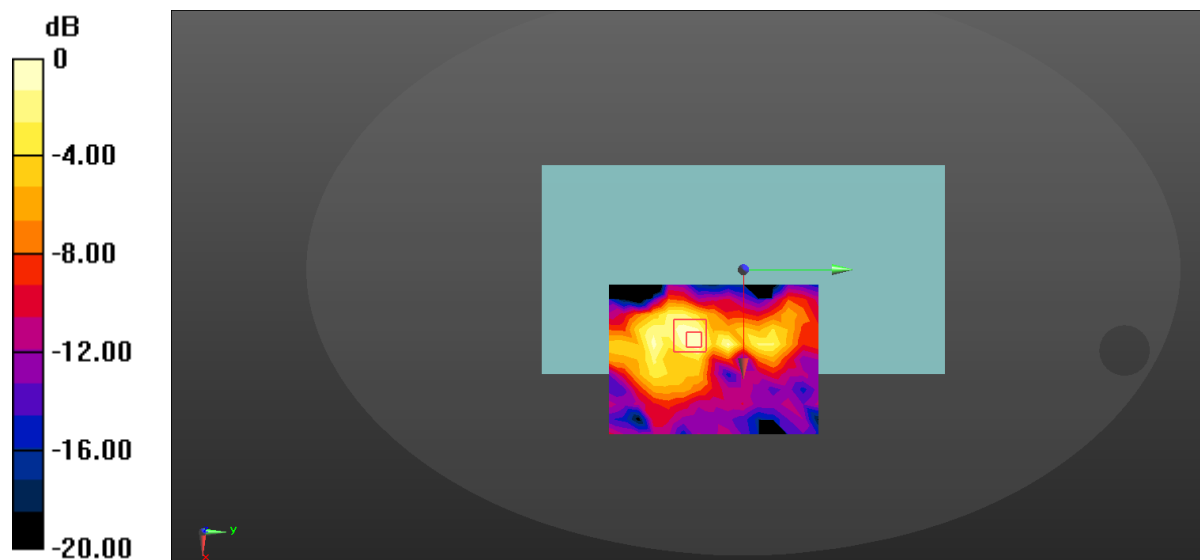

$$0 \text{ dB} = 0.264 \text{ W/kg} = -5.78 \text{ dBW/kg}$$

9#_WLAN 5.3GHz_802.11a 6Mbps_Front_0mm_Ch56

Communication System: UID 0, WIFI 5G (0); Frequency: 5280 MHz; Duty Cycle: 1:1.06

Medium parameters used: $f = 5280$ MHz; $\sigma = 4.762$ S/m; $\epsilon_r = 37.435$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(5.25, 5.25, 5.25); Calibrated: 3/26/2024;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 3/26/2024
- Phantom: ELI V8.0; Type: QD OVA 004 Ax; Serial: 2095
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

Area Scan (12x15x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0902 W/kg


Zoom Scan (9x9x17)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 1.633 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.122 W/kg

SAR(1 g) = 0.057 W/kg; SAR(10 g) = 0.033 W/kg

Maximum value of SAR (measured) = 0.0963 W/kg

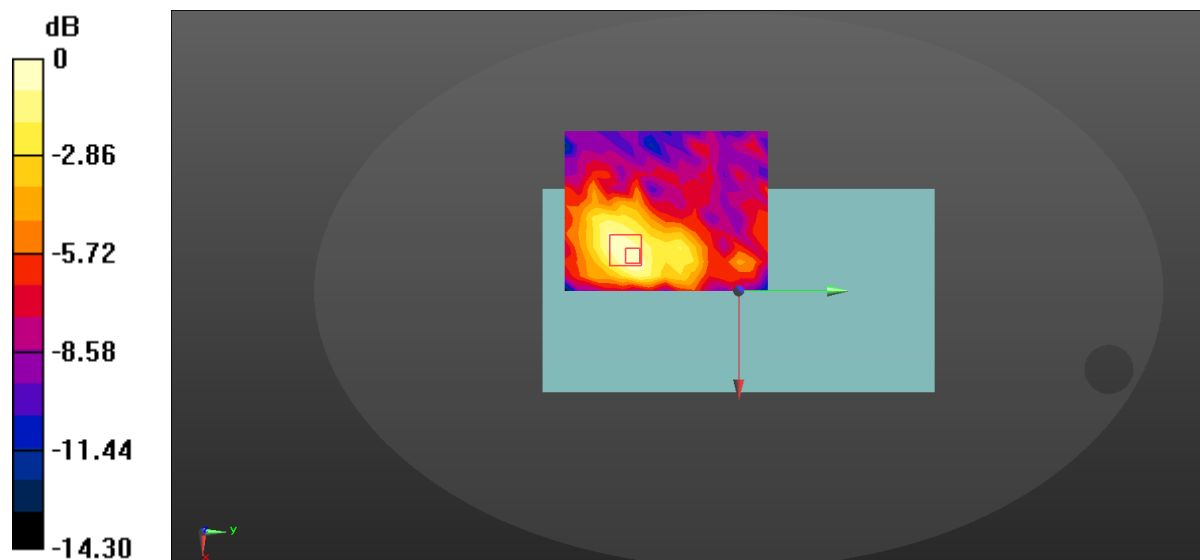

0 dB = 0.0963 W/kg = -10.16 dBW/kg

10#_WLAN 5.3GHz_802.11a 6Mbps_Back_0mm_Ch56

Communication System: UID 0, WIFI 5G (0); Frequency: 5280 MHz; Duty Cycle: 1:1.06

Medium parameters used: $f = 5280$ MHz; $\sigma = 4.762$ S/m; $\epsilon_r = 37.435$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(5.25, 5.25, 5.25); Calibrated: 3/26/2024;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 3/26/2024
- Phantom: ELI V8.0; Type: QD OVA 004 Ax; Serial: 2095
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

Area Scan (13x15x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.124 W/kg


Zoom Scan (9x9x17)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.161 W/kg

SAR(1 g) = 0.063 W/kg; SAR(10 g) = 0.022 W/kg

Maximum value of SAR (measured) = 0.124 W/kg

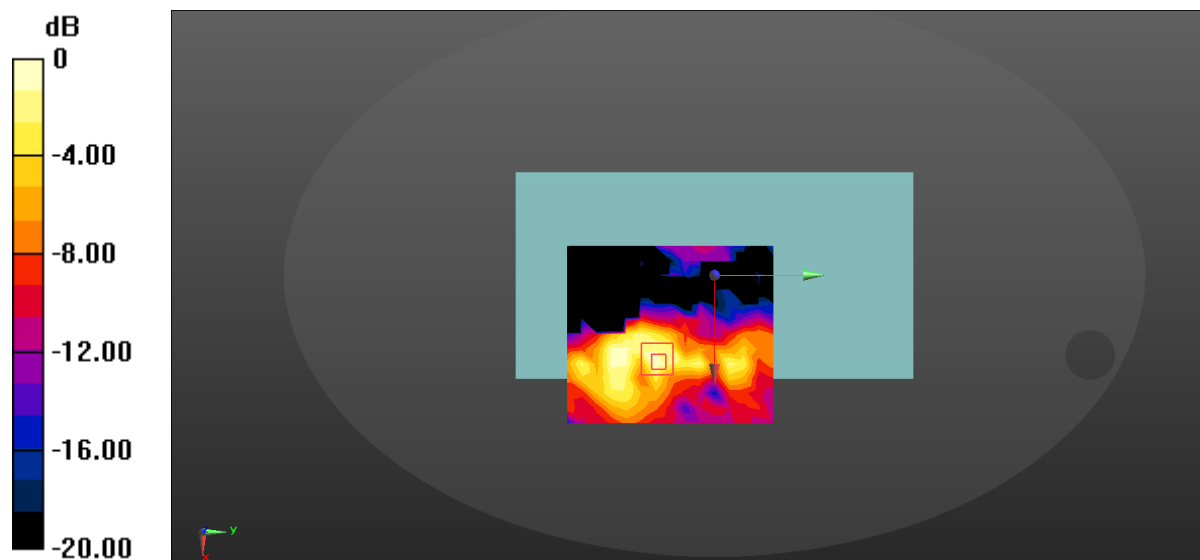

$$0 \text{ dB} = 0.124 \text{ W/kg} = -9.07 \text{ dBW/kg}$$

11#_WLAN 5.3GHz_802.11a 6Mbps_Back_0mm_Ch52

Communication System: UID 0, WIFI 5G (0); Frequency: 5260 MHz;Duty Cycle: 1:1.06

Medium parameters used: $f = 5260$ MHz; $\sigma = 4.74$ S/m; $\epsilon_r = 37.467$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(5.25, 5.25, 5.25); Calibrated: 3/26/2024;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 3/26/2024
- Phantom: ELI V8.0; Type: QD OVA 004 Ax; Serial: 2095
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

Area Scan (11x15x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.165 W/kg


Zoom Scan (10x15x17)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.196 W/kg

SAR(1 g) = 0.073 W/kg; SAR(10 g) = 0.021 W/kg

Maximum value of SAR (measured) = 0.148 W/kg

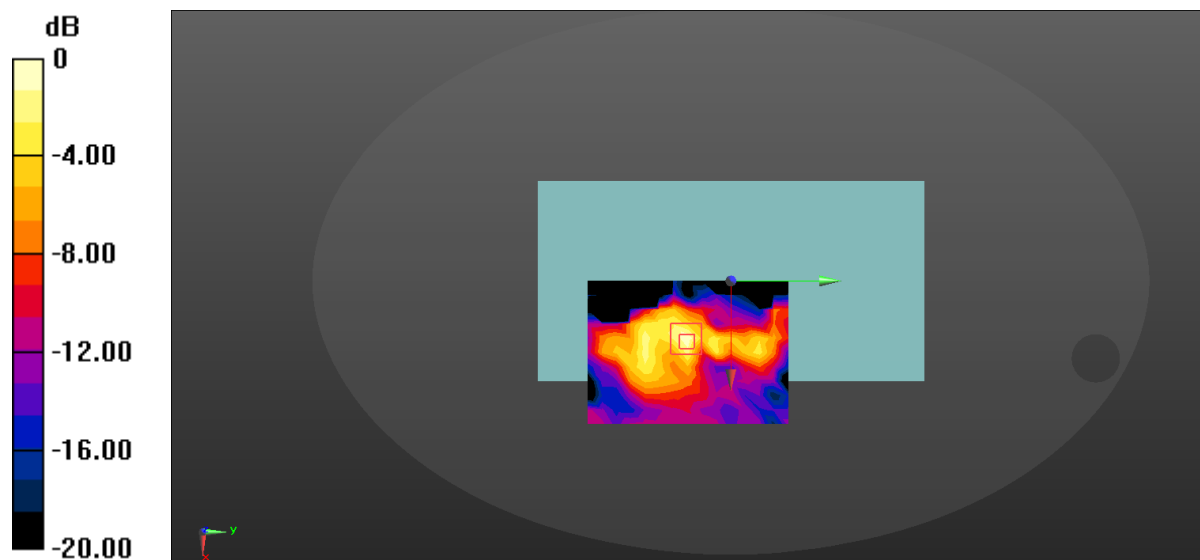

$$0 \text{ dB} = 0.165 \text{ W/kg} = -7.83 \text{ dBW/kg}$$

12#_WLAN 5.3GHz_802.11a 6Mbps_Back_0mm_Ch64

Communication System: UID 0, WIFI 5G (0); Frequency: 5320 MHz;Duty Cycle: 1:1.06

Medium parameters used: $f = 5320$ MHz; $\sigma = 4.802$ S/m; $\epsilon_r = 37.379$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(5.25, 5.25, 5.25); Calibrated: 3/26/2024;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 3/26/2024
- Phantom: ELI V8.0; Type: QD OVA 004 Ax; Serial: 2095
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

Area Scan (13x15x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.113 W/kg


Zoom Scan (8x8x17)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.158 W/kg

SAR(1 g) = 0.053 W/kg; SAR(10 g) = 0.017 W/kg

Maximum value of SAR (measured) = 0.111 W/kg

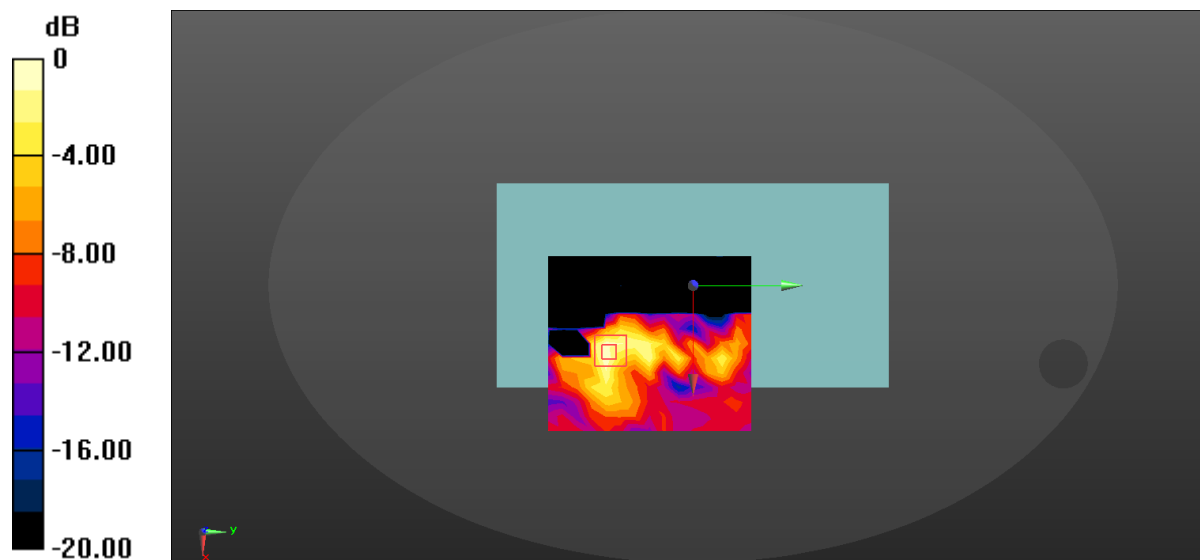

$$0 \text{ dB} = 0.113 \text{ W/kg} = -9.47 \text{ dBW/kg}$$

13#_WLAN 5.6GHz_802.11a 6Mbps_Front_0mm_Ch116

Communication System: UID 0, WIFI 5G (0); Frequency: 5580 MHz;Duty Cycle: 1:1.066

Medium parameters used: $f = 5580$ MHz; $\sigma = 5.066$ S/m; $\epsilon_r = 37.03$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(4.63, 4.63, 4.63); Calibrated: 3/26/2024;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 3/26/2024
- Phantom: ELI V8.0; Type: QD OVA 004 Ax; Serial: 2095
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

Area Scan (12x15x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.165 W/kg


Zoom Scan (9x9x17)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 1.809 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.591 W/kg

SAR(1 g) = 0.086 W/kg; SAR(10 g) = 0.034 W/kg

Maximum value of SAR (measured) = 0.164 W/kg

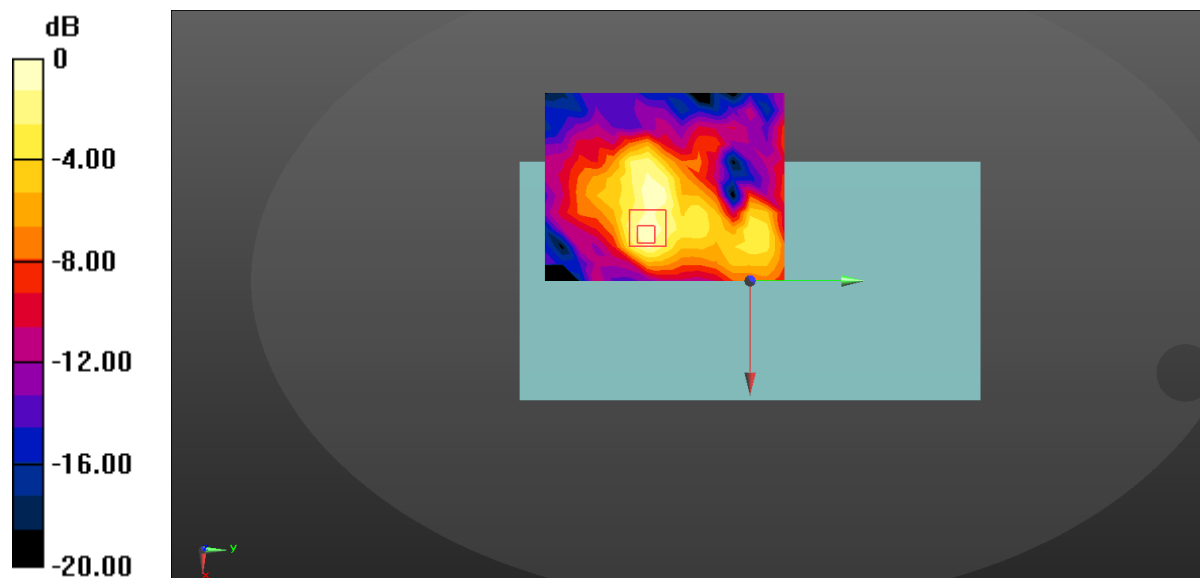

0 dB = 0.165 W/kg = -7.83 dBW/kg

14#_WLAN 5.6GHz_802.11a 6Mbps_Back_0mm_Ch116

Communication System: UID 0, WIFI 5G (0); Frequency: 5580 MHz;Duty Cycle: 1:1.066

Medium parameters used: $f = 5580$ MHz; $\sigma = 5.066$ S/m; $\epsilon_r = 37.03$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(4.63, 4.63, 4.63); Calibrated: 3/26/2024;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 3/26/2024
- Phantom: ELI V8.0; Type: QD OVA 004 Ax; Serial: 2095
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

Area Scan (13x15x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.290 W/kg


Zoom Scan (9x9x17)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.375 W/kg

SAR(1 g) = 0.140 W/kg; SAR(10 g) = 0.054 W/kg

Maximum value of SAR (measured) = 0.275 W/kg

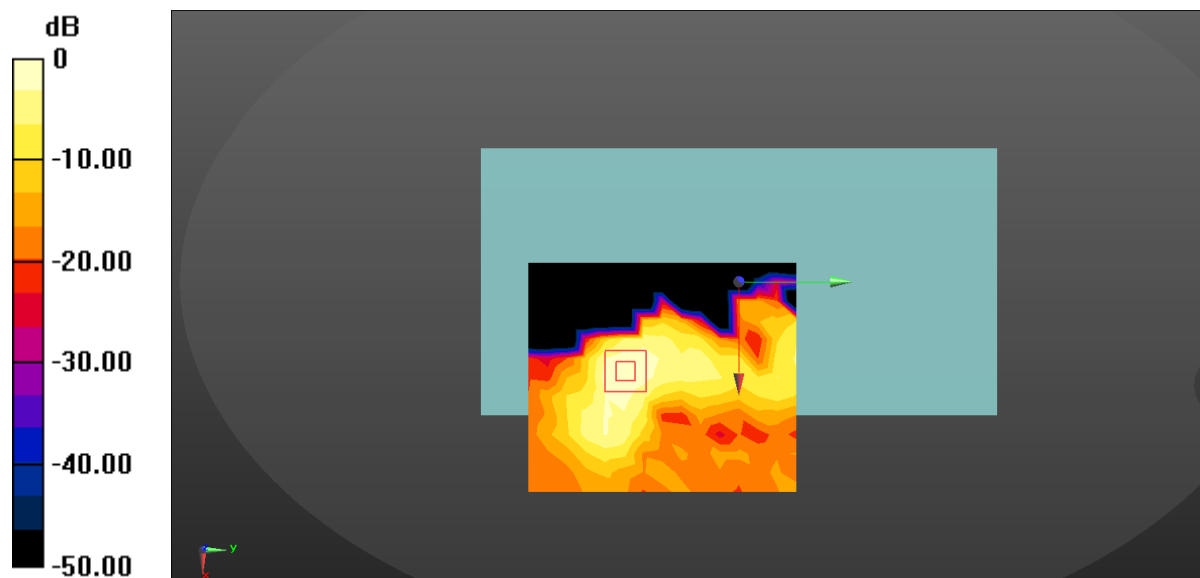

0 dB = 0.290 W/kg = -5.38 dBW/kg

15#_WLAN 5.6GHz_802.11a 6Mbps_Back_0mm_Ch100

Communication System: UID 0, WIFI 5G (0); Frequency: 5500 MHz; Duty Cycle: 1:1.066

Medium parameters used: $f = 5500$ MHz; $\sigma = 4.981$ S/m; $\epsilon_r = 37.14$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(4.63, 4.63, 4.63); Calibrated: 3/26/2024;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 3/26/2024
- Phantom: ELI V8.0; Type: QD OVA 004 Ax; Serial: 2095
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

Area Scan (13x15x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.185 W/kg


Zoom Scan (9x9x17)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.282 W/kg

SAR(1 g) = 0.095 W/kg; SAR(10 g) = 0.035 W/kg

Maximum value of SAR (measured) = 0.194 W/kg

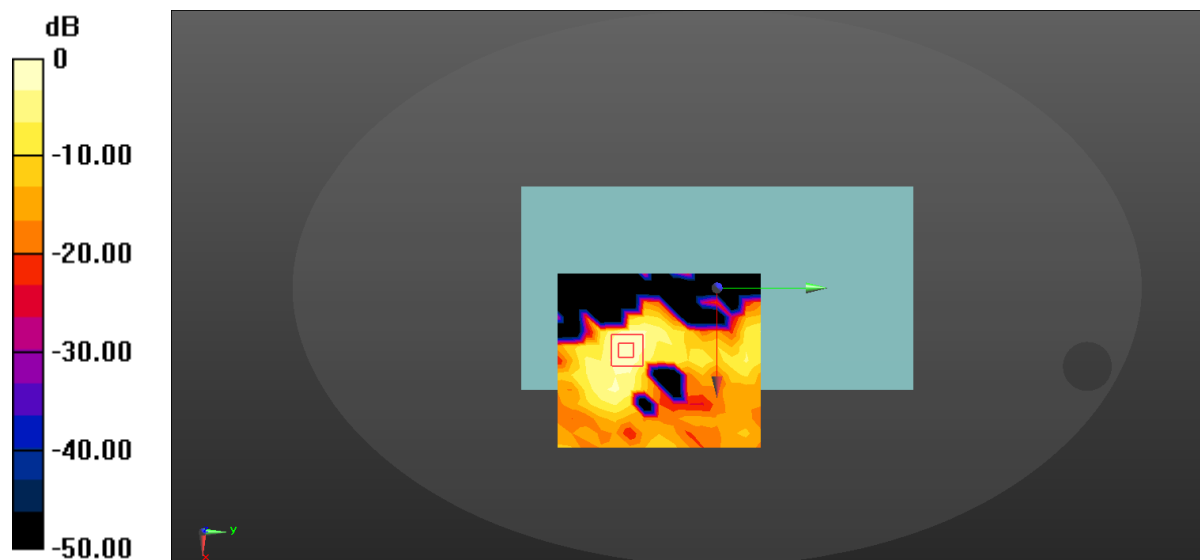

$$0 \text{ dB} = 0.194 \text{ W/kg} = -7.12 \text{ dBW/kg}$$

16#_WLAN 5.6GHz_802.11a 6Mbps_Back_0mm_Ch140

Communication System: UID 0, WIFI 5G (0); Frequency: 5700 MHz;Duty Cycle: 1:1.066

Medium parameters used: $f = 5700$ MHz; $\sigma = 5.195$ S/m; $\epsilon_r = 36.858$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(4.63, 4.63, 4.63); Calibrated: 3/26/2024;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 3/26/2024
- Phantom: ELI V8.0; Type: QD OVA 004 Ax; Serial: 2095
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

Area Scan (11x15x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.326 W/kg


Zoom Scan (8x8x17)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0.6140 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.08 W/kg

SAR(1 g) = 0.168 W/kg; SAR(10 g) = 0.067 W/kg

Maximum value of SAR (measured) = 0.341 W/kg

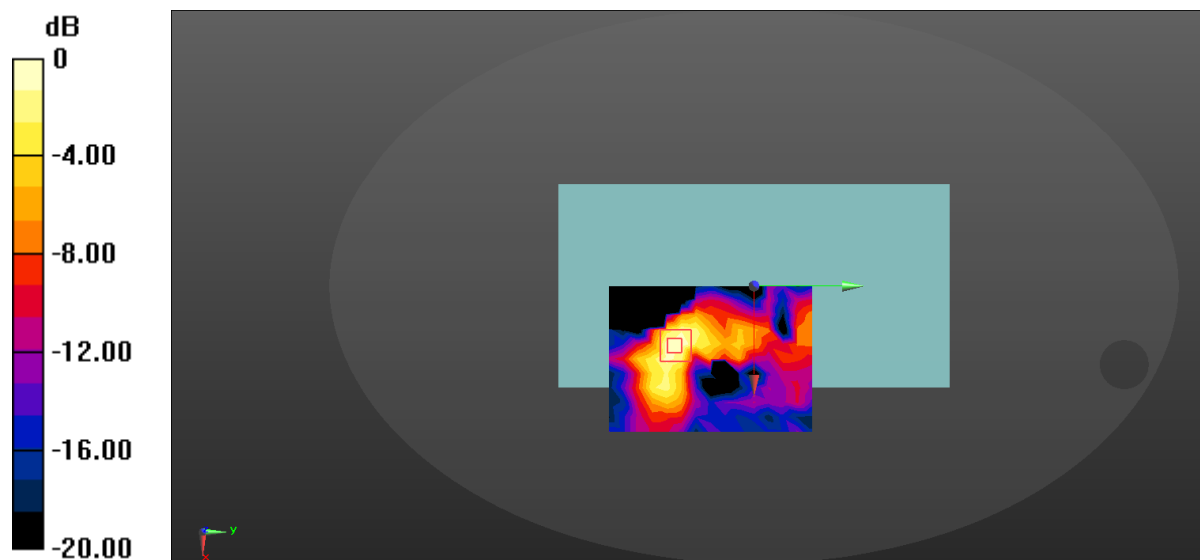

$$0 \text{ dB} = 0.341 \text{ W/kg} = -4.67 \text{ dBW/kg}$$

17#_WLAN 5.8GHz_802.11a 6Mbps_Front_0mm_Ch157

Communication System: UID 0, WIFI 5G (0); Frequency: 5785 MHz; Duty Cycle: 1:1.056

Medium parameters used: $f = 5785$ MHz; $\sigma = 5.282$ S/m; $\epsilon_r = 36.752$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(4.78, 4.78, 4.78); Calibrated: 3/26/2024;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 3/26/2024
- Phantom: ELI V8.0; Type: QD OVA 004 Ax; Serial: 2095
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

Area Scan (12x15x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.412 W/kg


Zoom Scan (9x9x17)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 3.120 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.638 W/kg

SAR(1 g) = 0.232 W/kg; SAR(10 g) = 0.100 W/kg

Maximum value of SAR (measured) = 0.454 W/kg

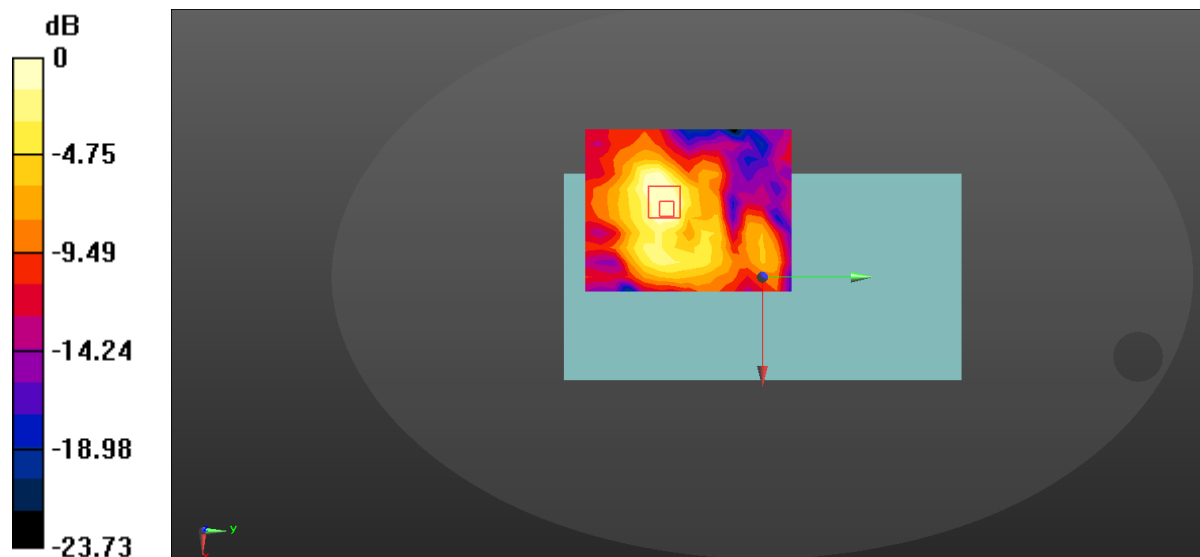

0 dB = 0.454 W/kg = -3.43 dBW/kg

18#_WLAN 5.8GHz_802.11a 6Mbps_Back_0mm_Ch157

Communication System: UID 0, WIFI 5G (0); Frequency: 5785 MHz;Duty Cycle: 1:1.056

Medium parameters used: $f = 5785$ MHz; $\sigma = 5.282$ S/m; $\epsilon_r = 36.752$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(4.78, 4.78, 4.78); Calibrated: 3/26/2024;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 3/26/2024
- Phantom: ELI V8.0; Type: QD OVA 004 Ax; Serial: 2095
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

Area Scan (13x15x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.548 W/kg


Zoom Scan (8x8x17)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 1.892 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.65 W/kg

SAR(1 g) = 0.287 W/kg; SAR(10 g) = 0.115 W/kg

Maximum value of SAR (measured) = 0.570 W/kg

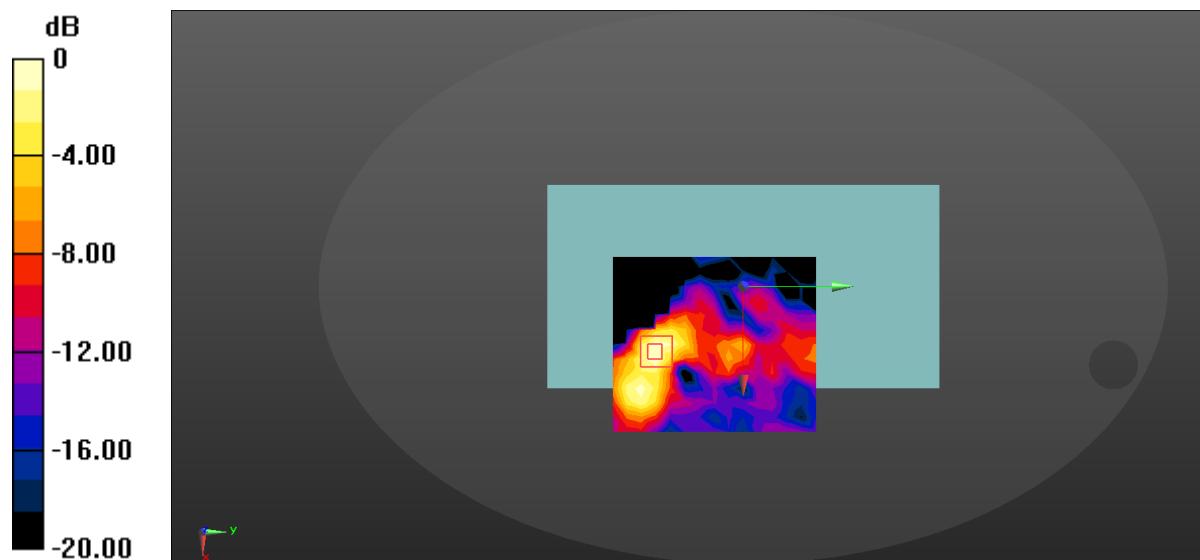

0 dB = 0.570 W/kg = -2.44 dBW/kg

19#_WLAN 5.8GHz_802.11a 6Mbps_Back_0mm_Ch149

Communication System: UID 0, WIFI 5G (0); Frequency: 5745 MHz;Duty Cycle: 1:1.056

Medium parameters used: $f = 5745$ MHz; $\sigma = 5.242$ S/m; $\epsilon_r = 36.799$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(4.78, 4.78, 4.78); Calibrated: 3/26/2024;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 3/26/2024
- Phantom: ELI V8.0; Type: QD OVA 004 Ax; Serial: 2095
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

Area Scan (13x15x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.425 W/kg


Zoom Scan (10x9x17)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 1.534 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.624 W/kg

SAR(1 g) = 0.229 W/kg; SAR(10 g) = 0.087 W/kg

Maximum value of SAR (measured) = 0.453 W/kg

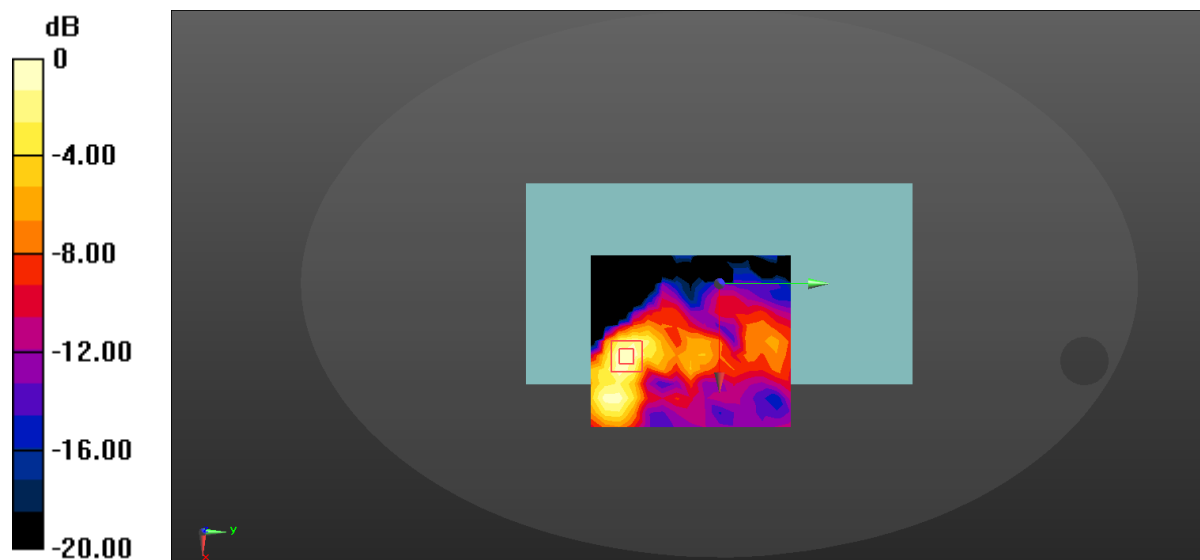

0 dB = 0.453 W/kg = -3.44 dBW/kg

20#_WLAN 5.8GHz_802.11a 6Mbps_Back_0mm_Ch165

Communication System: UID 0, WIFI 5G (0); Frequency: 5825 MHz;Duty Cycle: 1:1.056

Medium parameters used: $f = 5825$ MHz; $\sigma = 5.326$ S/m; $\epsilon_r = 36.699$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(4.78, 4.78, 4.78); Calibrated: 3/26/2024;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 3/26/2024
- Phantom: ELI V8.0; Type: QD OVA 004 Ax; Serial: 2095
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.561 W/kg


Zoom Scan (8x8x17)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 1.657 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.873 W/kg

SAR(1 g) = 0.318 W/kg; SAR(10 g) = 0.130 W/kg

Maximum value of SAR (measured) = 0.628 W/kg

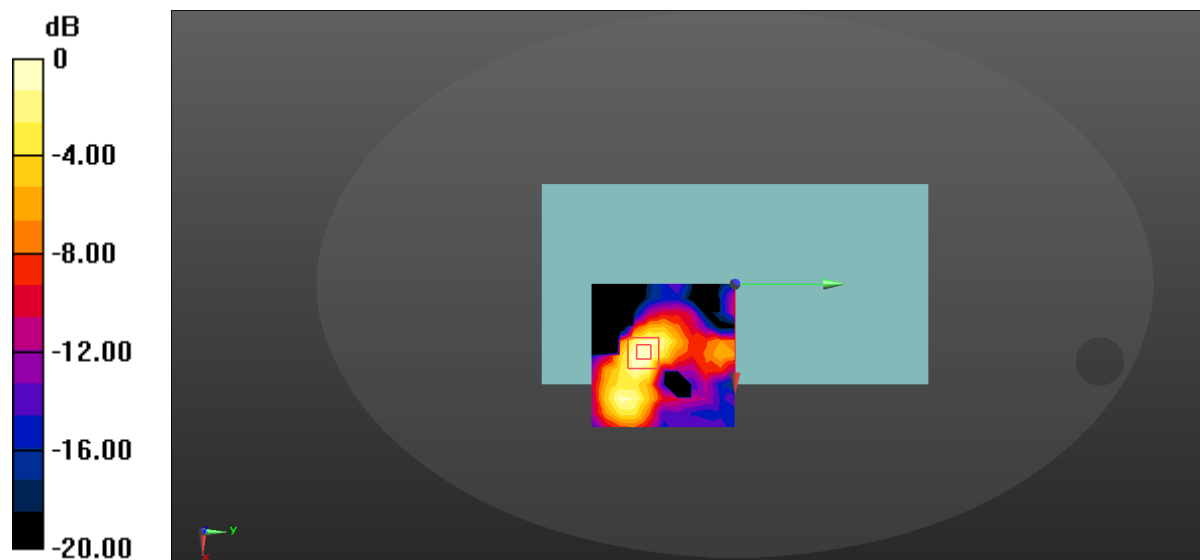

$$0 \text{ dB} = 0.628 \text{ W/kg} = -2.02 \text{ dBW/kg}$$

40#_WLAN 5.2GHz_802.11a 6Mbps_Top side_0mm_Ch40

Communication System: UID 0, WIFI 5G (0); Frequency: 5200 MHz; Duty Cycle: 1:1.055

Medium parameters used: $f = 5200$ MHz; $\sigma = 4.68$ S/m; $\epsilon_r = 37.551$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(5.25, 5.25, 5.25); Calibrated: 3/26/2024;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 3/26/2024
- Phantom: ELI V8.0; Type: QD OVA 004 Ax; Serial: 2095
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

Area Scan (13x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0574 W/kg


Zoom Scan (9x9x17)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 1.341 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.103 W/kg

SAR(1 g) = 0.040 W/kg; SAR(10 g) = 0.027 W/kg

Maximum value of SAR (measured) = 0.0542 W/kg

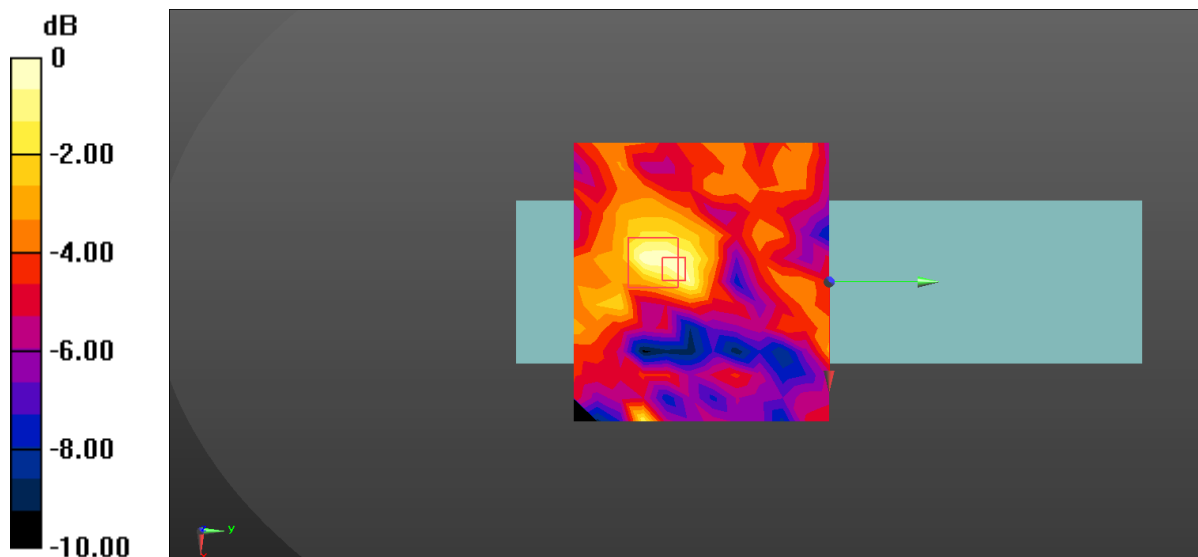

0 dB = 0.0574 W/kg = -12.41 dBW/kg

41#_WLAN 5.3GHz_802.11a 6Mbps_Top side_0mm_Ch56

Communication System: UID 0, WIFI 5G (0); Frequency: 5280 MHz; Duty Cycle: 1:1.06

Medium parameters used: $f = 5280$ MHz; $\sigma = 4.762$ S/m; $\epsilon_r = 37.435$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(5.25, 5.25, 5.25); Calibrated: 3/26/2024;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 3/26/2024
- Phantom: ELI V8.0; Type: QD OVA 004 Ax; Serial: 2095
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

Area Scan (13x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0451 W/kg


Zoom Scan (9x10x17)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 1.727 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.0860 W/kg

SAR(1 g) = 0.029 W/kg; SAR(10 g) = 0.018 W/kg

Maximum value of SAR (measured) = 0.0475 W/kg

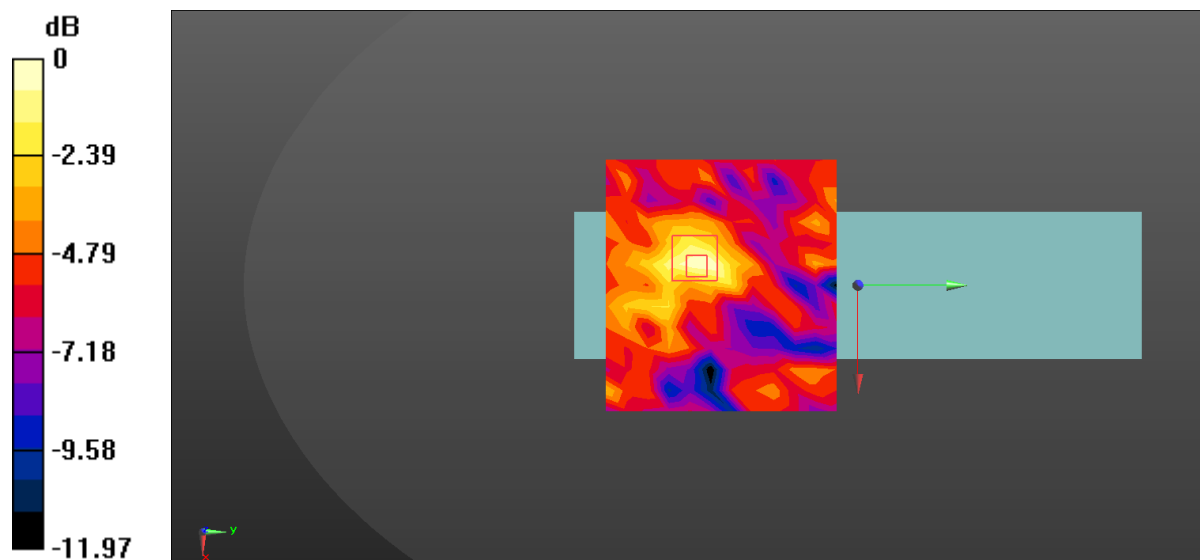

0 dB = 0.0475 W/kg = -13.23 dBW/kg

42#_WLAN 5.6GHz_802.11a 6Mbps_Top side_0mm_Ch116

Communication System: UID 0, WIFI 5G (0); Frequency: 5580 MHz;Duty Cycle: 1:1.066

Medium parameters used: $f = 5580$ MHz; $\sigma = 5.066$ S/m; $\epsilon_r = 37.03$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(4.63, 4.63, 4.63); Calibrated: 3/26/2024;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 3/26/2024
- Phantom: ELI V8.0; Type: QD OVA 004 Ax; Serial: 2095
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

Area Scan (13x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.114 W/kg


Zoom Scan (9x9x17)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 1.563 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.168 W/kg

SAR(1 g) = 0.069 W/kg; SAR(10 g) = 0.034 W/kg

Maximum value of SAR (measured) = 0.123 W/kg

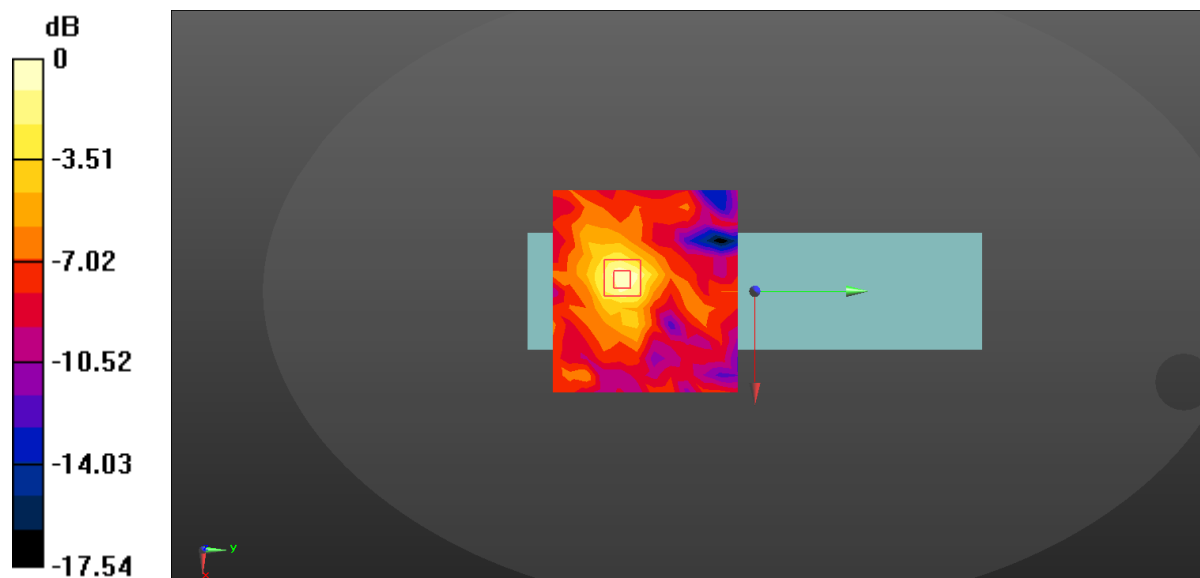

0 dB = 0.123 W/kg = -9.10 dBW/kg

43#_WLAN 5.8GHz_802.11a 6Mbps_Top side_0mm_Ch157

Communication System: UID 0, WIFI 5G (0); Frequency: 5785 MHz;Duty Cycle: 1:1.056

Medium parameters used: $f = 5785$ MHz; $\sigma = 5.282$ S/m; $\epsilon_r = 36.752$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(4.78, 4.78, 4.78); Calibrated: 3/26/2024;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 3/26/2024
- Phantom: ELI V8.0; Type: QD OVA 004 Ax; Serial: 2095
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

Area Scan (13x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.282 W/kg


Zoom Scan (9x9x17)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 2.100 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.461 W/kg

SAR(1 g) = 0.174 W/kg; SAR(10 g) = 0.076 W/kg

Maximum value of SAR (measured) = 0.337 W/kg

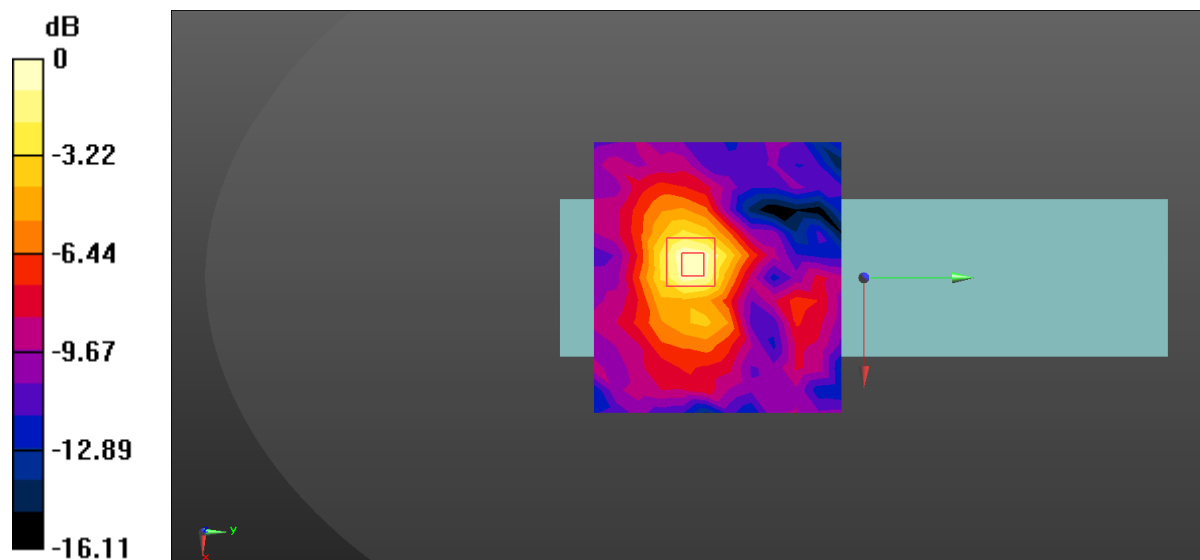

0 dB = 0.337 W/kg = -4.72 dBW/kg

44#_2.4G SRD_Front_2442


Communication System: UID 0, SRD (0); Frequency: 2442 MHz; Duty Cycle: 1:1.118
Medium parameters used: $f = 2442$ MHz; $\sigma = 1.868$ S/m; $\epsilon_r = 38.382$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(7.27, 7.27, 7.27); Calibrated: 3/26/2024;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 3/26/2024
- Phantom: ELI V8.0; Type: QD OVA 004 Ax; Serial: 2095
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

Area Scan (6x18x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 1.37 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 0.7710 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 1.74 W/kg
SAR(1 g) = 0.962 W/kg; SAR(10 g) = 0.481 W/kg
Maximum value of SAR (measured) = 1.48 W/kg

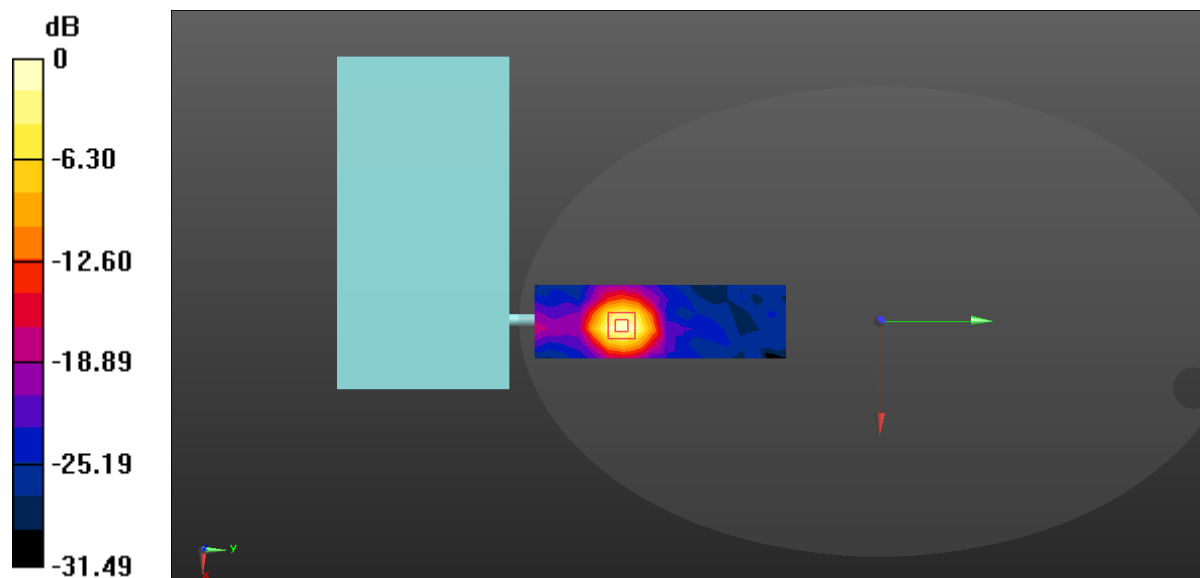

0 dB = 1.48 W/kg = 1.70 dBW/kg

45#_2.4G SRD_Front_2412


Communication System: UID 0, SRD (0); Frequency: 2412 MHz; Duty Cycle: 1:1.118
Medium parameters used: $f = 2412$ MHz; $\sigma = 1.833$ S/m; $\epsilon_r = 38.511$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(7.27, 7.27, 7.27); Calibrated: 3/26/2024;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 3/26/2024
- Phantom: ELI V8.0; Type: QD OVA 004 Ax; Serial: 2095
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

Area Scan (6x18x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.886 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 1.379 V/m; Power Drift = -0.06 dB
Peak SAR (extrapolated) = 1.52 W/kg
SAR(1 g) = 0.866 W/kg; SAR(10 g) = 0.443 W/kg
Maximum value of SAR (measured) = 1.32 W/kg

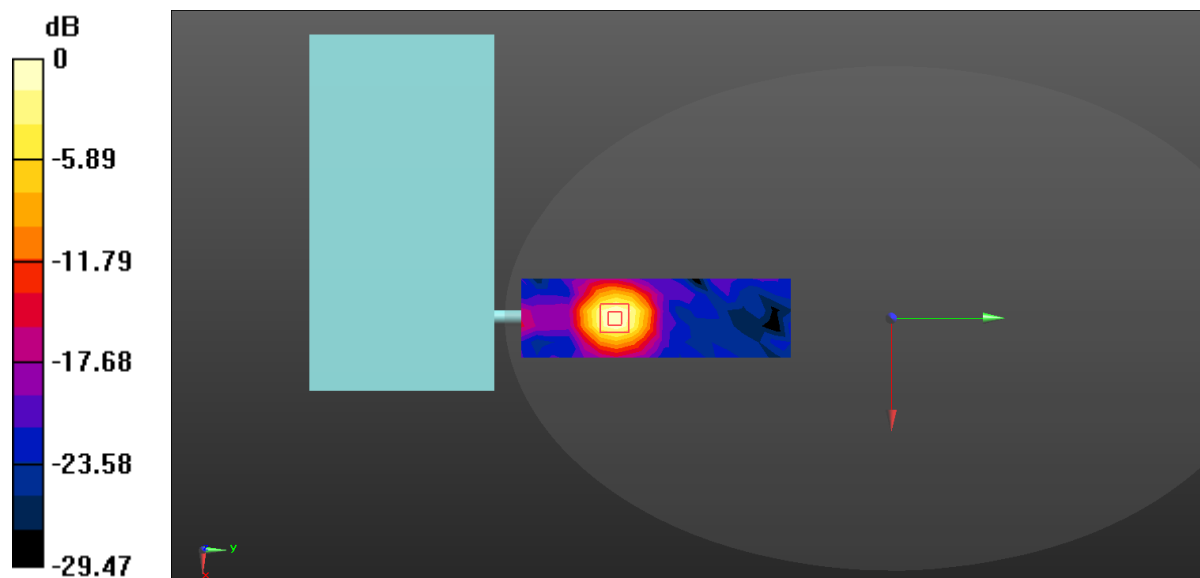

0 dB = 1.32 W/kg = 1.21 dBW/kg

46#_2.4G SRD_Front_2467


Communication System: UID 0, SRD (0); Frequency: 2467 MHz; Duty Cycle: 1:1.118
Medium parameters used: $f = 2467$ MHz; $\sigma = 1.897$ S/m; $\epsilon_r = 38.277$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(7.27, 7.27, 7.27); Calibrated: 3/26/2024;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 3/26/2024
- Phantom: ELI V8.0; Type: QD OVA 004 Ax; Serial: 2095
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

Area Scan (6x18x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 1.34 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 0 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 1.78 W/kg
SAR(1 g) = 1.01 W/kg; SAR(10 g) = 0.518 W/kg
Maximum value of SAR (measured) = 1.54 W/kg

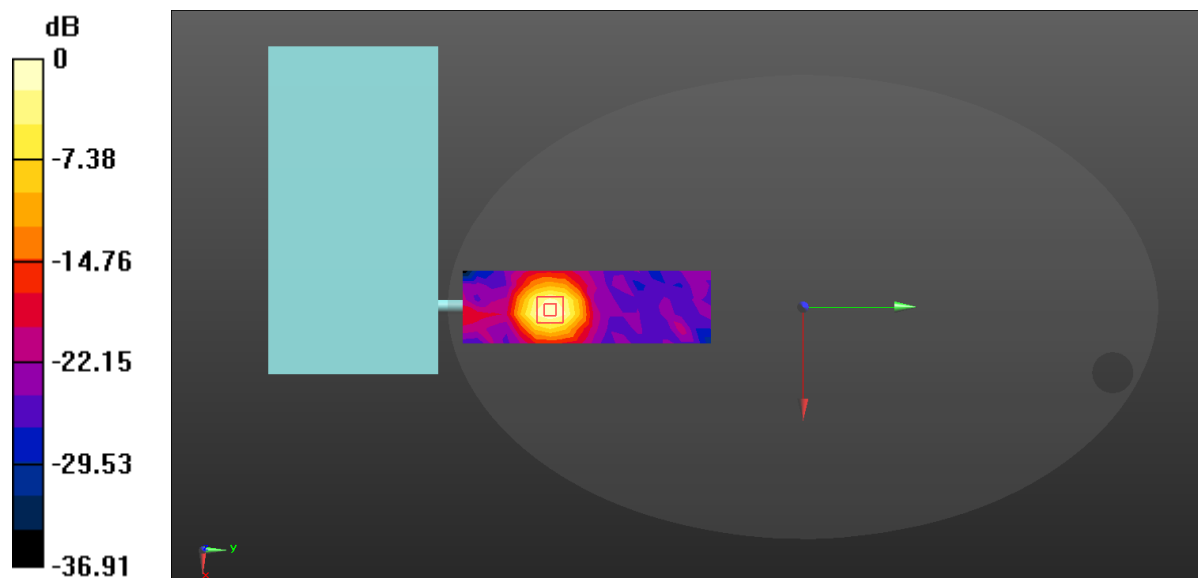

0 dB = 1.54 W/kg = 1.88 dBW/kg

47#_2.4G SRD_Front_2442


Communication System: UID 0, SRD (0); Frequency: 2442 MHz; Duty Cycle: 1:1.118
Medium parameters used: $f = 2442$ MHz; $\sigma = 1.868$ S/m; $\epsilon_r = 38.382$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(7.27, 7.27, 7.27); Calibrated: 3/26/2024;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 3/26/2024
- Phantom: ELI V8.0; Type: QD OVA 004 Ax; Serial: 2095
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

Area Scan (15x5x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 1.08 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 0.2090 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 1.20 W/kg
SAR(1 g) = 0.704 W/kg; SAR(10 g) = 0.366 W/kg
Maximum value of SAR (measured) = 1.02 W/kg

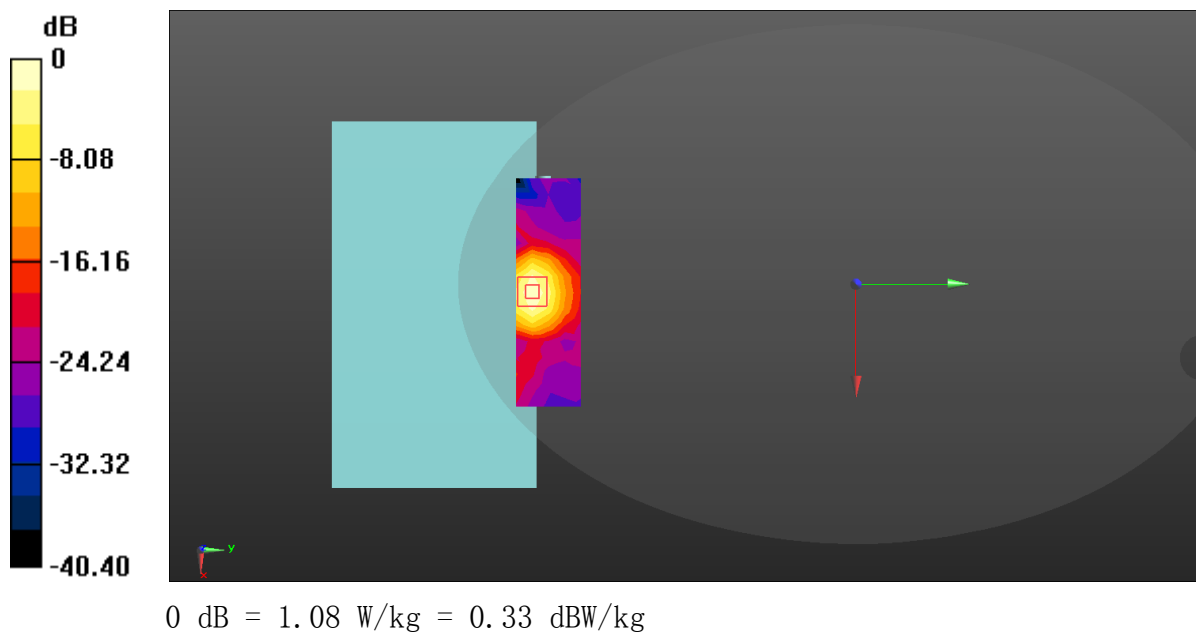

48#_2.4G SRD_Front_2442


Communication System: UID 0, SRD (0); Frequency: 2442 MHz; Duty Cycle: 1:1.118
Medium parameters used: $f = 2442$ MHz; $\sigma = 1.868$ S/m; $\epsilon_r = 38.382$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(7.27, 7.27, 7.27); Calibrated: 3/26/2024;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 3/26/2024
- Phantom: ELI V8.0; Type: QD OVA 004 Ax; Serial: 2095
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

Area Scan (10x9x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.00960 W/kg

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 1.880 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 0.0130 W/kg
SAR(1 g) = 0.00455 W/kg; SAR(10 g) = 0.00138 W/kg
Maximum value of SAR (measured) = 0.0112 W/kg

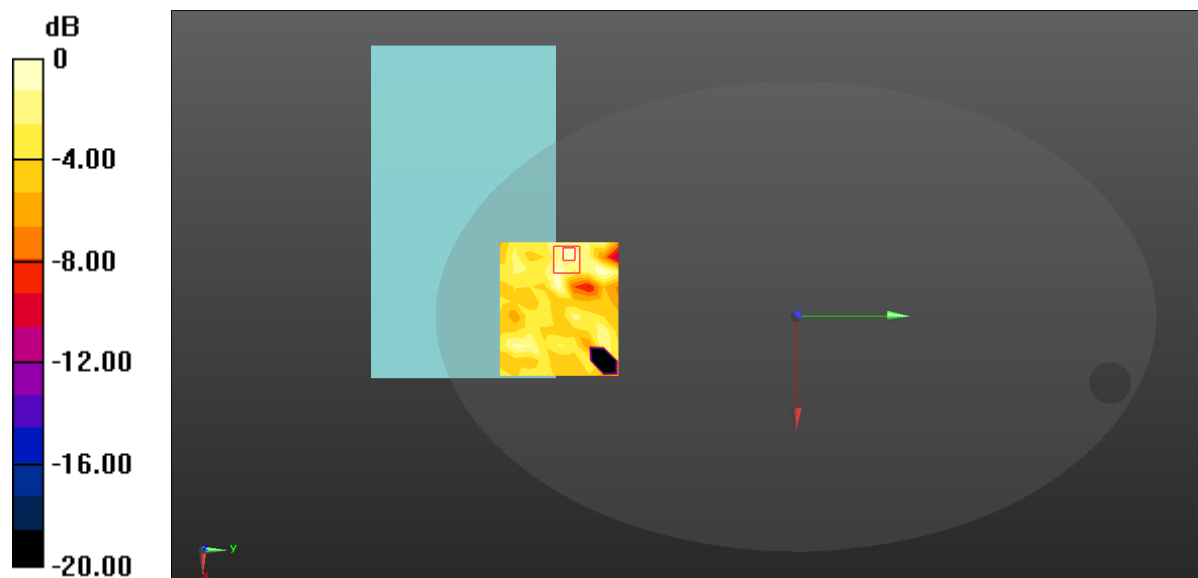

0 dB = 0.0112 W/kg = -19.51 dBW/kg

49#_2.4G SRD_Back_2442

Communication System: UID 0, SRD (0); Frequency: 2442 MHz; Duty Cycle: 1:1.118

Medium parameters used: $f = 2442$ MHz; $\sigma = 1.868$ S/m; $\epsilon_r = 38.382$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(7.27, 7.27, 7.27); Calibrated: 3/26/2024;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 3/26/2024
- Phantom: ELI V8.0; Type: QD OVA 004 Ax; Serial: 2095
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

Area Scan (6x18x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.43 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.9880 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 1.81 W/kg

SAR(1 g) = 0.990 W/kg; SAR(10 g) = 0.491 W/kg

Maximum value of SAR (measured) = 1.53 W/kg

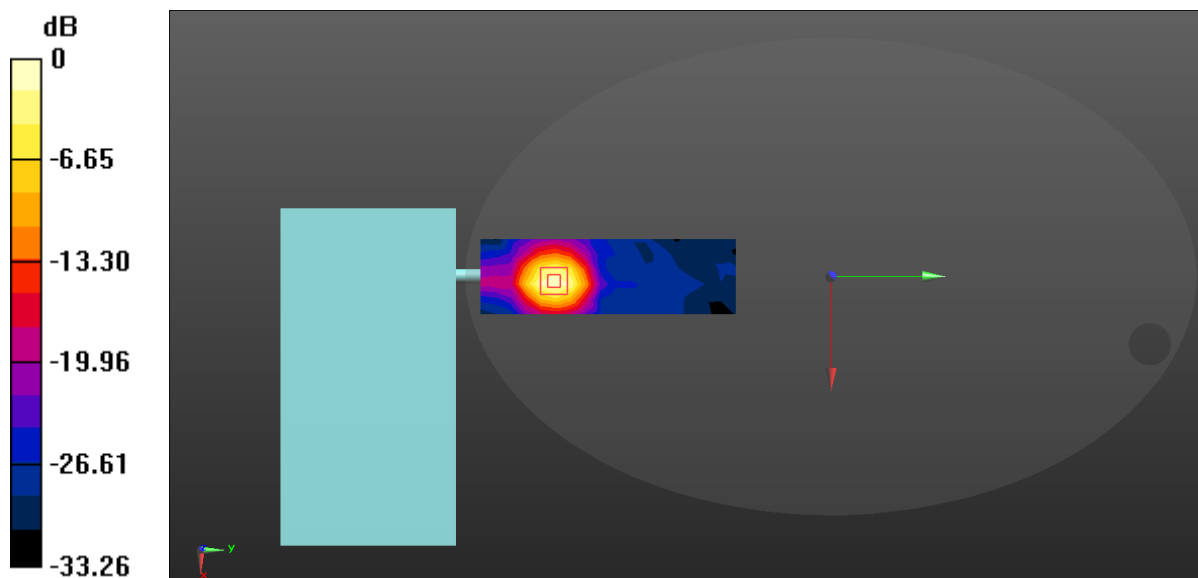

0 dB = 1.53 W/kg = 1.85 dBW/kg

50#_2.4G SRD_Back_2412


Communication System: UID 0, SRD (0); Frequency: 2412 MHz; Duty Cycle: 1:1.118
Medium parameters used: $f = 2412$ MHz; $\sigma = 1.833$ S/m; $\epsilon_r = 38.511$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(7.27, 7.27, 7.27); Calibrated: 3/26/2024;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 3/26/2024
- Phantom: ELI V8.0; Type: QD OVA 004 Ax; Serial: 2095
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

Area Scan (6x18x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 1.32 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 1.330 V/m; Power Drift = -0.05 dB
Peak SAR (extrapolated) = 1.77 W/kg
SAR(1 g) = 0.974 W/kg; SAR(10 g) = 0.489 W/kg
Maximum value of SAR (measured) = 1.51 W/kg

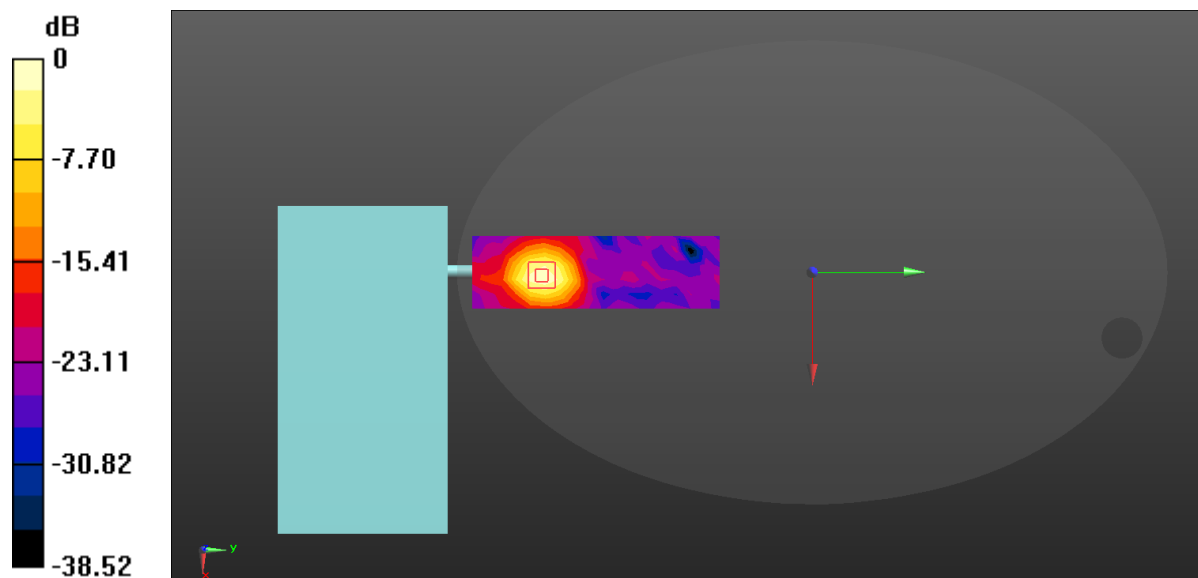

0 dB = 1.51 W/kg = 1.79 dBW/kg

51#_2.4G SRD_Back_2467


Communication System: UID 0, SRD (0); Frequency: 2467 MHz; Duty Cycle: 1:1.118
Medium parameters used: $f = 2467$ MHz; $\sigma = 1.897$ S/m; $\epsilon_r = 38.277$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(7.27, 7.27, 7.27); Calibrated: 3/26/2024;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 3/26/2024
- Phantom: ELI V8.0; Type: QD OVA 004 Ax; Serial: 2095
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

Area Scan (6x18x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.915 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 1.527 V/m; Power Drift = -0.06 dB
Peak SAR (extrapolated) = 1.50 W/kg
SAR(1 g) = 0.887 W/kg; SAR(10 g) = 0.463 W/kg
Maximum value of SAR (measured) = 1.32 W/kg

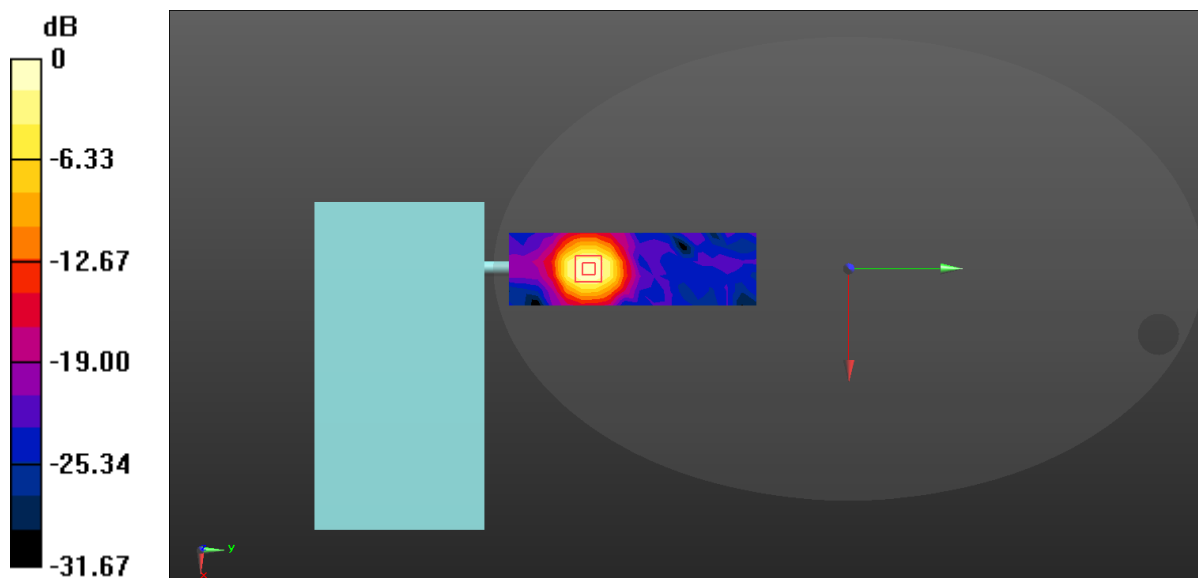

0 dB = 1.32 W/kg = 1.21 dBW/kg

52#_2.4G SRD_Back_2442

Communication System: UID 0, SRD (0); Frequency: 2442 MHz; Duty Cycle: 1:1.118

Medium parameters used: $f = 2442$ MHz; $\sigma = 1.868$ S/m; $\epsilon_r = 38.382$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(7.27, 7.27, 7.27); Calibrated: 3/26/2024;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 3/26/2024
- Phantom: ELI V8.0; Type: QD OVA 004 Ax; Serial: 2095
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

Area Scan (15x5x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.174 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.9340 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.191 W/kg

SAR(1 g) = 0.129 W/kg; SAR(10 g) = 0.078 W/kg

Maximum value of SAR (measured) = 0.172 W/kg

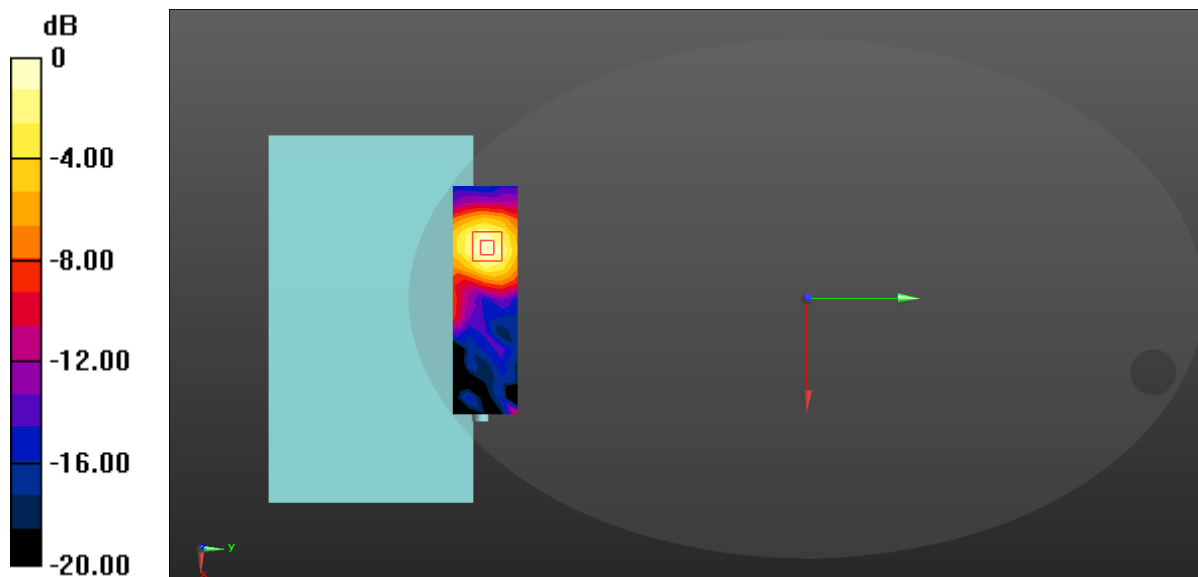

0 dB = 0.174 W/kg = -7.59 dBW/kg

53#_2.4G SRD_Back_2442


Communication System: UID 0, SRD (0); Frequency: 2442 MHz; Duty Cycle: 1:1.118
Medium parameters used: $f = 2442$ MHz; $\sigma = 1.868$ S/m; $\epsilon_r = 38.382$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(7.27, 7.27, 7.27); Calibrated: 3/26/2024;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 3/26/2024
- Phantom: ELI V8.0; Type: QD OVA 004 Ax; Serial: 2095
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

Area Scan (6x8x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.00625 W/kg

Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 1.432 V/m; Power Drift = -0.06 dB
Peak SAR (extrapolated) = 0.00756 W/kg
SAR(1 g) = 0.00386 W/kg; SAR(10 g) = 0.00217 W/kg
Maximum value of SAR (measured) = 0.00756 W/kg

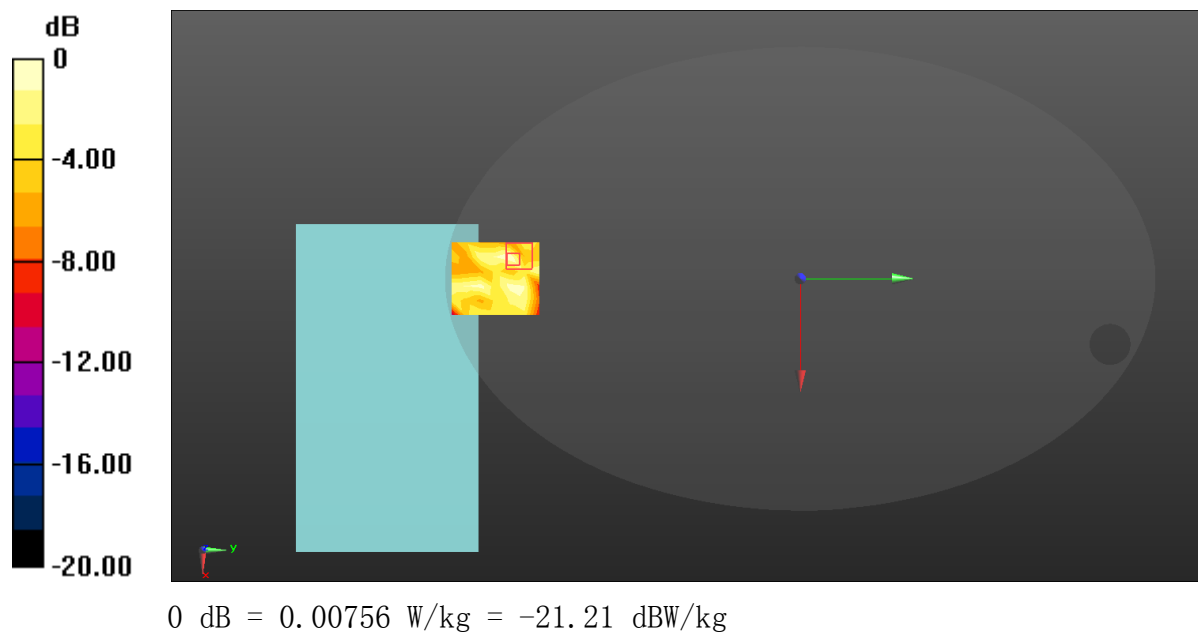

54#_2.4G SRD_Top_2442


Communication System: UID 0, SRD (0); Frequency: 2442 MHz; Duty Cycle: 1:1.118
Medium parameters used: $f = 2442$ MHz; $\sigma = 1.868$ S/m; $\epsilon_r = 38.382$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(7.27, 7.27, 7.27); Calibrated: 3/26/2024;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 3/26/2024
- Phantom: ELI V8.0; Type: QD OVA 004 Ax; Serial: 2095
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

Area Scan (16x17x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 0.00795 W/kg

Zoom Scan (8x9x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 0.8320 V/m; Power Drift = -0.13 dB
Peak SAR (extrapolated) = 0.00442 W/kg
SAR(1 g) = 0.00276 W/kg; SAR(10 g) = 0.00227 W/kg
Maximum value of SAR (measured) = 0.00417 W/kg

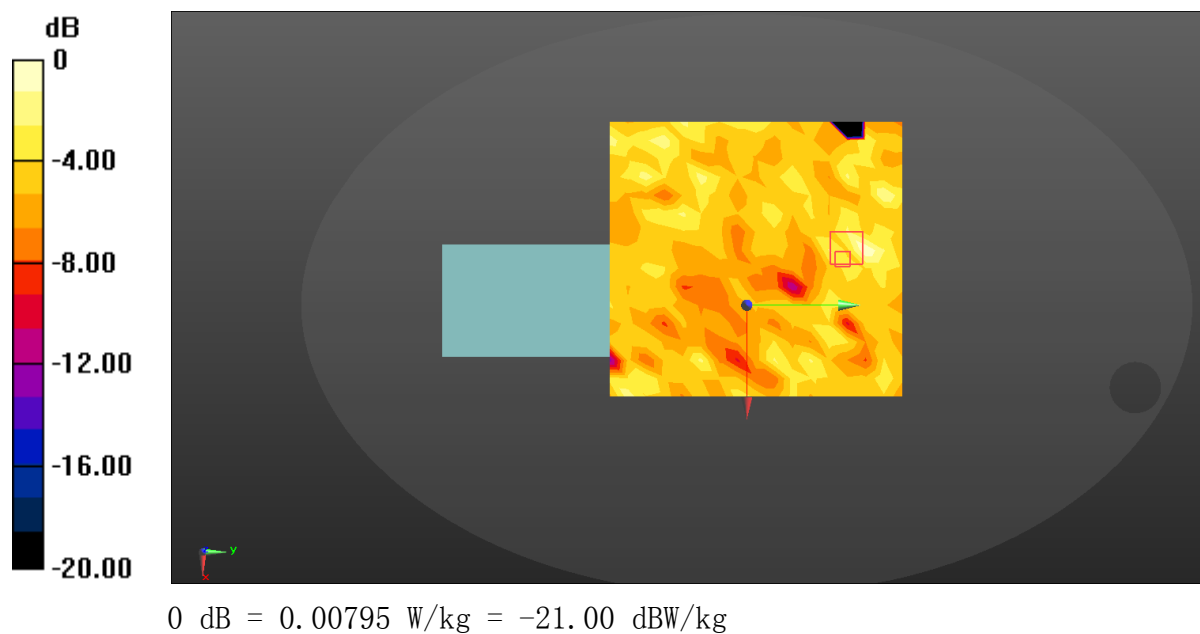

55#_2.4G SRD_Top_2442


Communication System: UID 0, SRD (0); Frequency: 2442 MHz; Duty Cycle: 1:1.118
Medium parameters used: $f = 2442$ MHz; $\sigma = 1.868$ S/m; $\epsilon_r = 38.382$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(7.27, 7.27, 7.27); Calibrated: 3/26/2024;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 3/26/2024
- Phantom: ELI V8.0; Type: QD OVA 004 Ax; Serial: 2095
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

Area Scan (6x19x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 1.18 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 0.9740 V/m; Power Drift = 0.05 dB
Peak SAR (extrapolated) = 1.76 W/kg
SAR(1 g) = 0.976 W/kg; SAR(10 g) = 0.495 W/kg
Maximum value of SAR (measured) = 1.51 W/kg

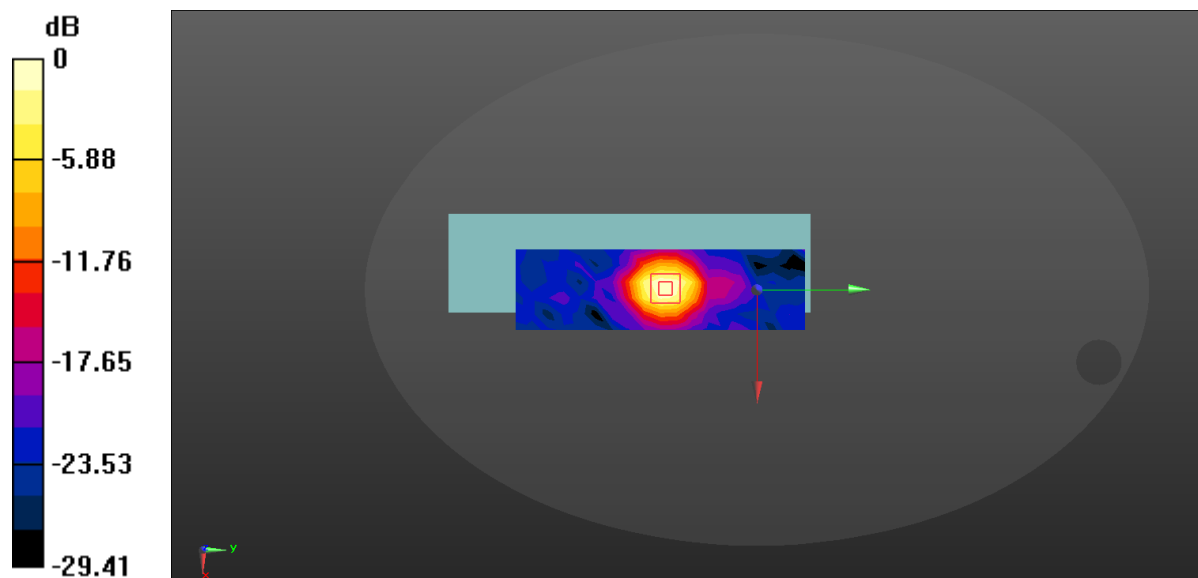

0 dB = 1.51 W/kg = 1.79 dBW/kg

56#_2.4G SRD_Top_2412


Communication System: UID 0, SRD (0); Frequency: 2412 MHz; Duty Cycle: 1:1.118
Medium parameters used: $f = 2412$ MHz; $\sigma = 1.833$ S/m; $\epsilon_r = 38.511$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(7.27, 7.27, 7.27); Calibrated: 3/26/2024;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 3/26/2024
- Phantom: ELI V8.0; Type: QD OVA 004 Ax; Serial: 2095
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

Area Scan (6x19x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 1.08 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 0.5930 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 1.93 W/kg
SAR(1 g) = 1.02 W/kg; SAR(10 g) = 0.510 W/kg
Maximum value of SAR (measured) = 1.64 W/kg

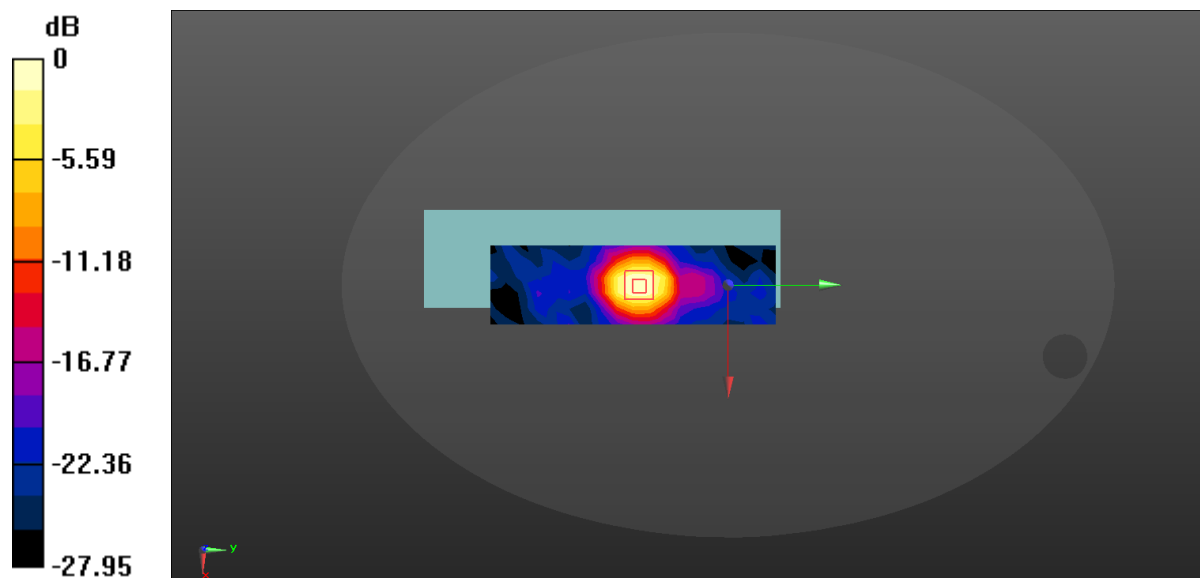

$$0 \text{ dB} = 1.64 \text{ W/kg} = 2.15 \text{ dBW/kg}$$

57#_2.4G SRD_Top_2467


Communication System: UID 0, SRD (0); Frequency: 2467 MHz; Duty Cycle: 1:1.118
Medium parameters used: $f = 2467$ MHz; $\sigma = 1.897$ S/m; $\epsilon_r = 38.277$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(7.27, 7.27, 7.27); Calibrated: 3/26/2024;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 3/26/2024
- Phantom: ELI V8.0; Type: QD OVA 004 Ax; Serial: 2095
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

Area Scan (6x19x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 1.17 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 0.9980 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 1.54 W/kg
SAR(1 g) = 0.894 W/kg; SAR(10 g) = 0.470 W/kg
Maximum value of SAR (measured) = 1.33 W/kg

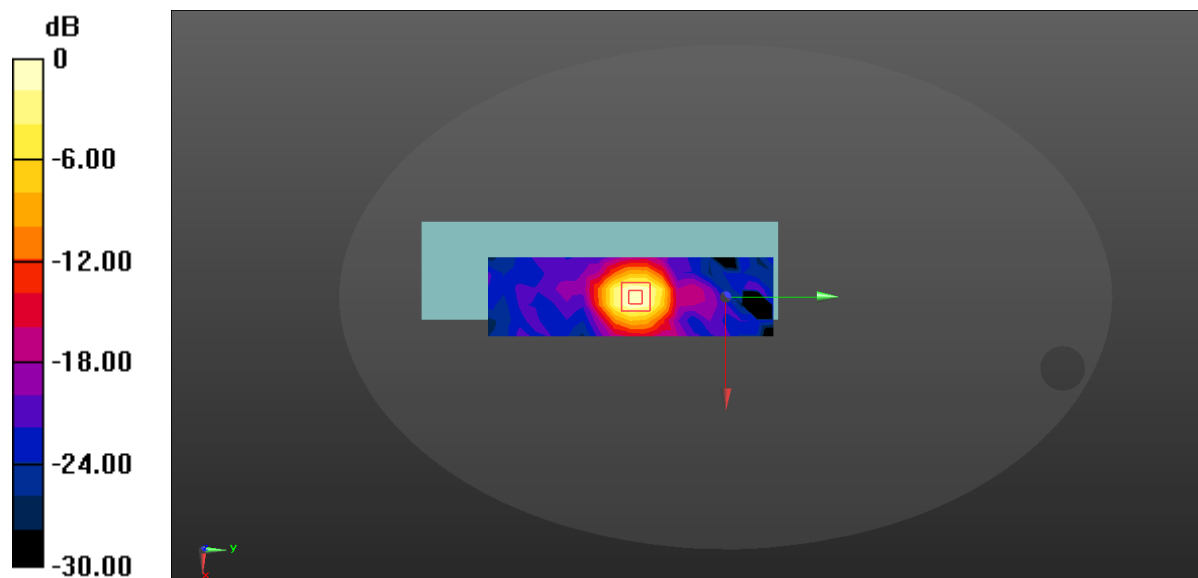

0 dB = 1.33 W/kg = 1.24 dBW/kg

58#_2.4G SRD_Top_2442


Communication System: UID 0, SRD (0); Frequency: 2442 MHz; Duty Cycle: 1:1.118
Medium parameters used: $f = 2442$ MHz; $\sigma = 1.868$ S/m; $\epsilon_r = 38.382$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(7.27, 7.27, 7.27); Calibrated: 3/26/2024;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 3/26/2024
- Phantom: ELI V8.0; Type: QD OVA 004 Ax; Serial: 2095
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

Area Scan (19x6x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 1.47 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 17.12 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 1.74 W/kg
SAR(1 g) = 0.968 W/kg; SAR(10 g) = 0.490 W/kg
Maximum value of SAR (measured) = 1.48 W/kg

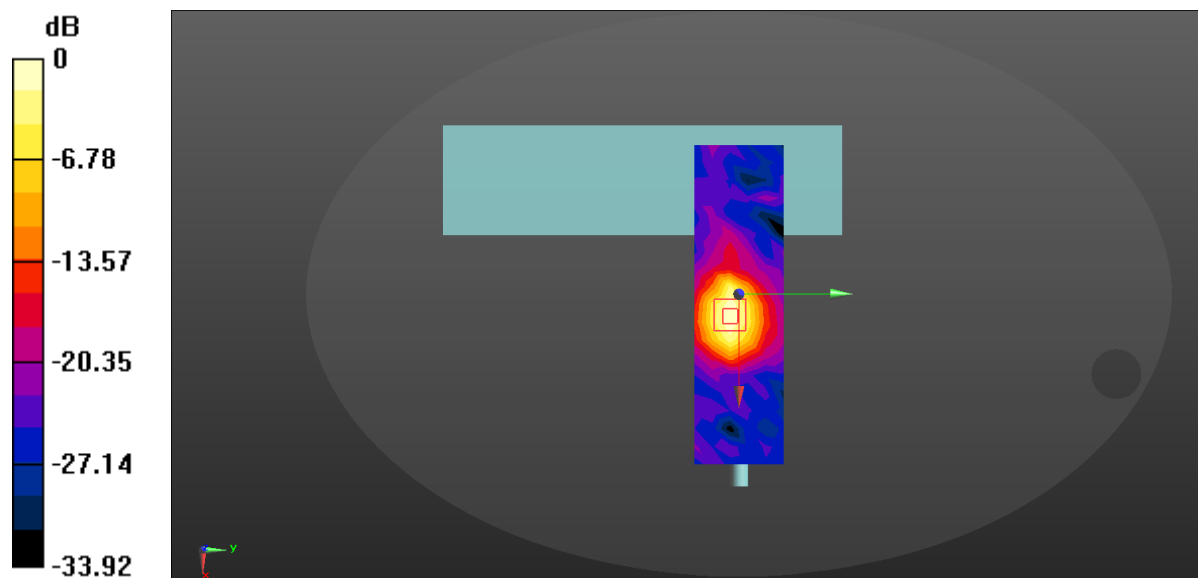

0 dB = 1.48 W/kg = 1.70 dBW/kg

59#_2.4G SRD_Top_2412


Communication System: UID 0, SRD (0); Frequency: 2412 MHz; Duty Cycle: 1:1.118
Medium parameters used: $f = 2412$ MHz; $\sigma = 1.833$ S/m; $\epsilon_r = 38.511$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(7.27, 7.27, 7.27); Calibrated: 3/26/2024;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 3/26/2024
- Phantom: ELI V8.0; Type: QD OVA 004 Ax; Serial: 2095
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

Area Scan (19x6x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 1.57 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 14.43 V/m; Power Drift = 0.11 dB
Peak SAR (extrapolated) = 1.62 W/kg
SAR(1 g) = 0.891 W/kg; SAR(10 g) = 0.455 W/kg
Maximum value of SAR (measured) = 1.37 W/kg

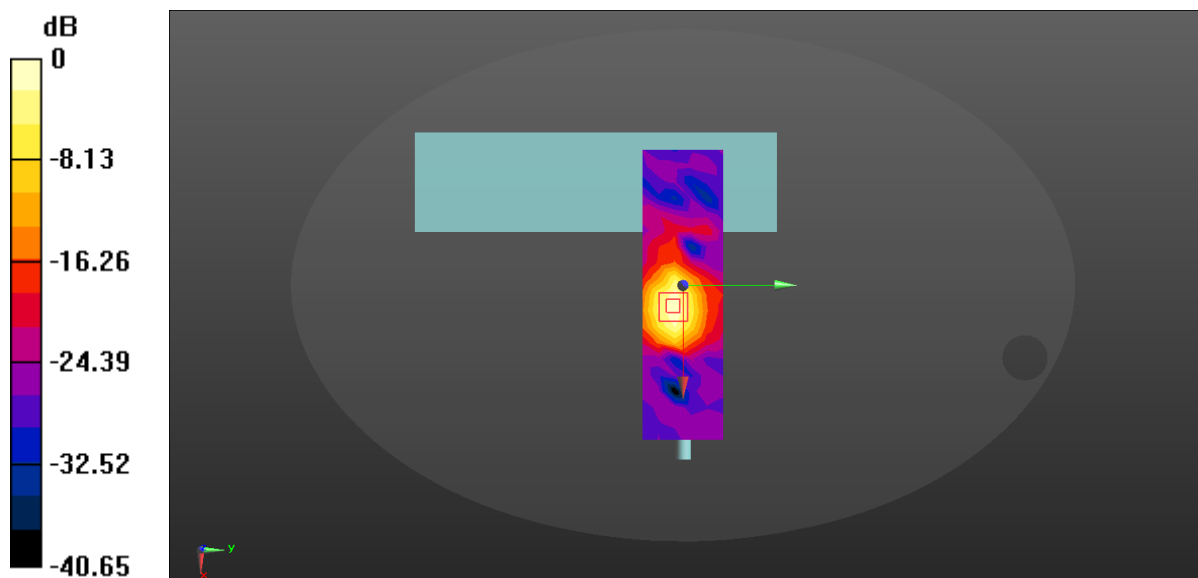

0 dB = 1.57 W/kg = 1.96 dBW/kg

60#_2.4G SRD_Top_2467


Communication System: UID 0, SRD (0); Frequency: 2467 MHz; Duty Cycle: 1:1.118
Medium parameters used: $f = 2467$ MHz; $\sigma = 1.897$ S/m; $\epsilon_r = 38.277$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(7.27, 7.27, 7.27); Calibrated: 3/26/2024;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 3/26/2024
- Phantom: ELI V8.0; Type: QD OVA 004 Ax; Serial: 2095
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

Area Scan (19x6x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 1.36 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 17.19 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 1.74 W/kg
SAR(1 g) = 0.980 W/kg; SAR(10 g) = 0.510 W/kg
Maximum value of SAR (measured) = 1.46 W/kg

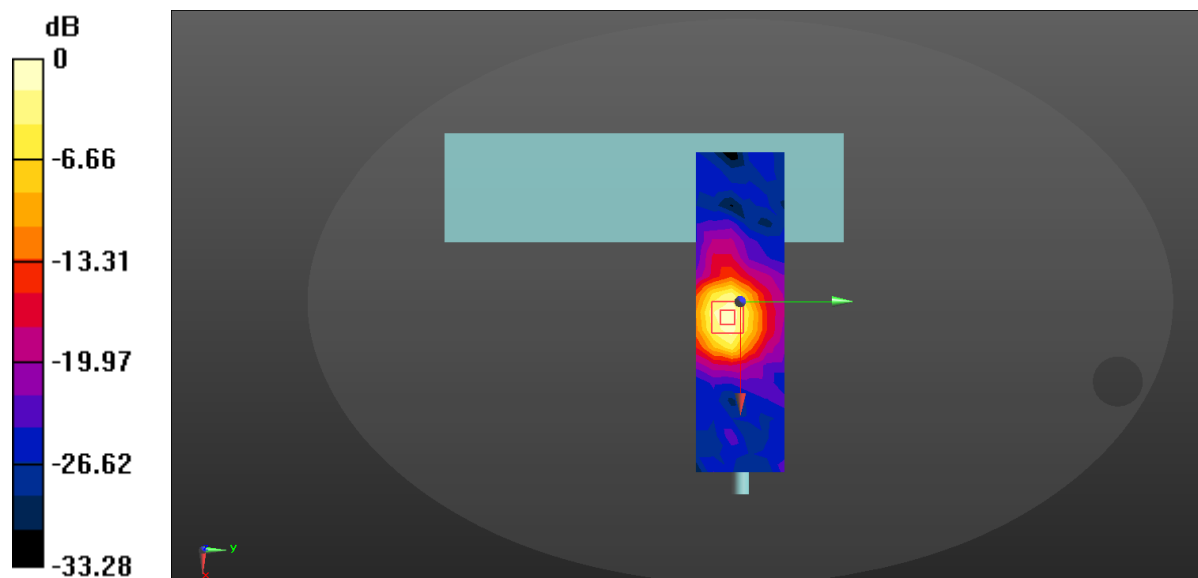

0 dB = 1.46 W/kg = 1.64 dBW/kg