



## Appendix D

### RF Test Data for B1 WIFI(Conducted Measurement)

Product Name: E Ink Tablet, Smart E Ink Tablet, ePaper Tablet, E-bag Tablet, E-book Tablet, E-reader Tablet, Eyes protection E Ink Tablet, E-paper Tablet, Color E Ink Tablet, Color ePaper Tablet

Trade Mark: BOOX

Test Model: Leaf2

#### Environmental Conditions

Temperature:	25.2°C
Relative Humidity:	52.4%
ATM Pressure:	100.0 kPa
Test Engineer:	Simba Huang
Supervised by:	Seal Chen



# Contents

	Page
<b>COVER PAGE</b>	
1 Duty Cycle .....	3
1.1 Test Result.....	3
1.2 Test Graphs.....	4
2 Maximum Conducted Output Power .....	11
2.1 Test Result.....	11
3 -26dB Bandwidth .....	12
3.1 Test Result.....	12
3.2 Test Graphs.....	13
4 Occupied Channel Bandwidth .....	20
4.1 Test Result.....	20
4.2 Test Graphs.....	21
5 Maximum Power Spectral Density Level .....	28
5.1 Test Result.....	28
5.2 Test Graphs.....	29
6 Frequency Stability .....	36
6.1 Test Result.....	36
7 Conducted RF Spurious Emission.....	40
7.1 Test Result.....	40
7.2 Test Graphs.....	41
8 Restrict Band .....	48
8.1 Test Result.....	48
8.2 Test Graphs.....	50





# 1 Duty Cycle



## 1.1 Test Result



Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
a	5180	Ant1	98.56	0.06	0.5
a	5200	Ant1	98.78	0.05	0.49
a	5240	Ant1	98.8	0.05	0.49
n20	5180	Ant1	98.7	0.06	0.53
n20	5200	Ant1	98.7	0.06	0.53
n20	5240	Ant1	98.7	0.06	0.53
n40	5190	Ant1	97	0.13	1.08
n40	5230	Ant1	96.93	0.14	1.09
ac20	5180	Ant1	98.59	0.06	0.53
ac20	5200	Ant1	98.69	0.06	0.53
ac20	5240	Ant1	98.6	0.06	0.53
ac40	5190	Ant1	96.89	0.14	1.06
ac40	5230	Ant1	96.64	0.15	1.09
ac80	5210	Ant1	90.77	0.42	2.27


## 1.2 Test Graphs

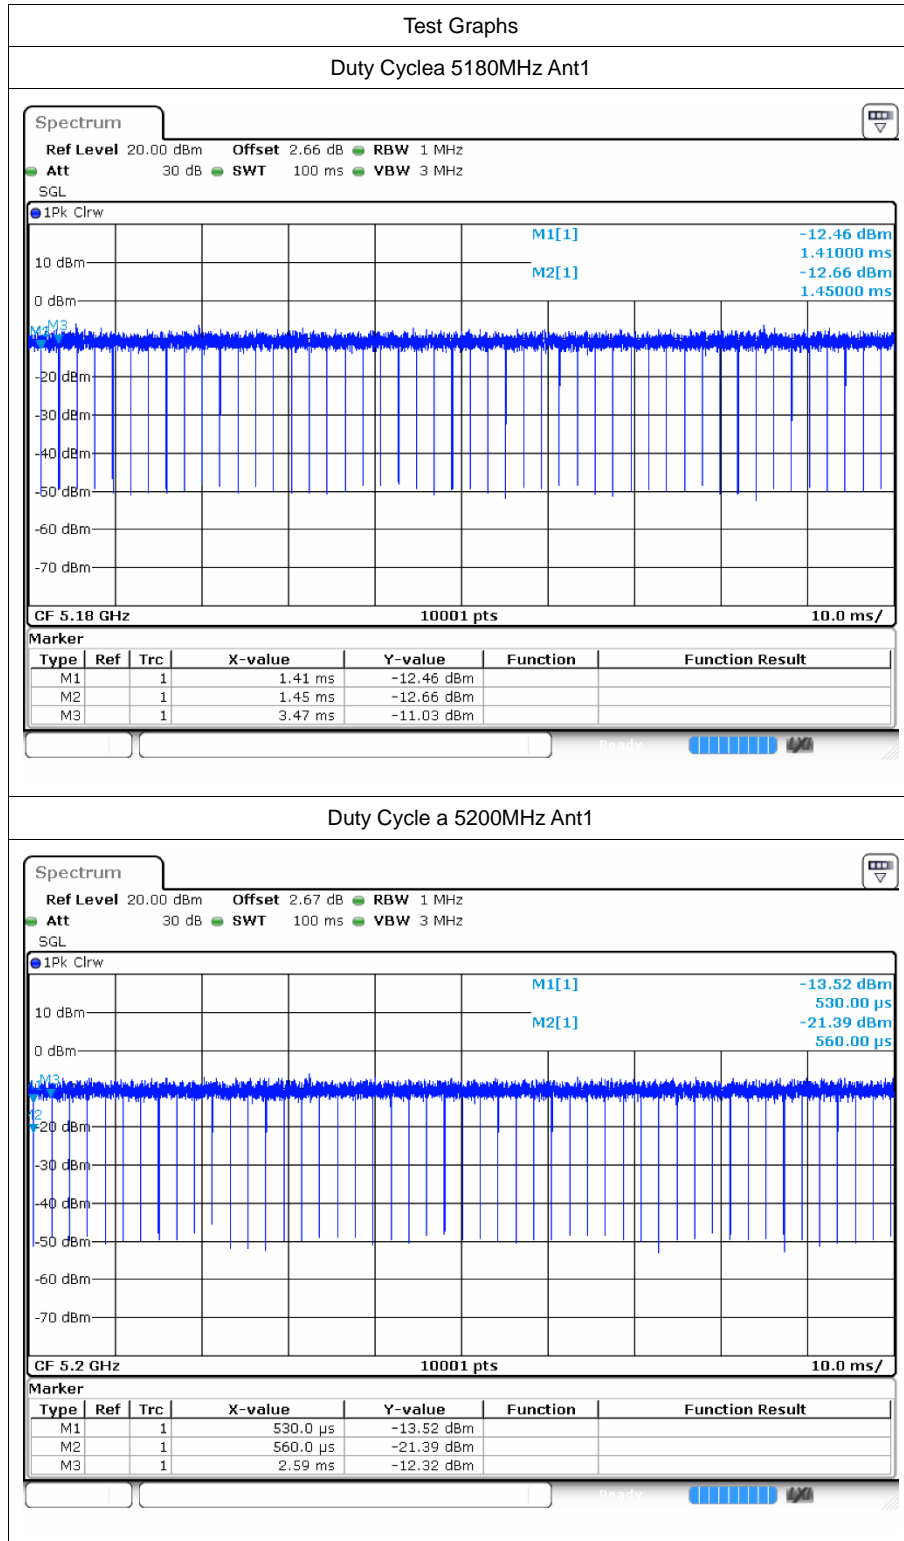

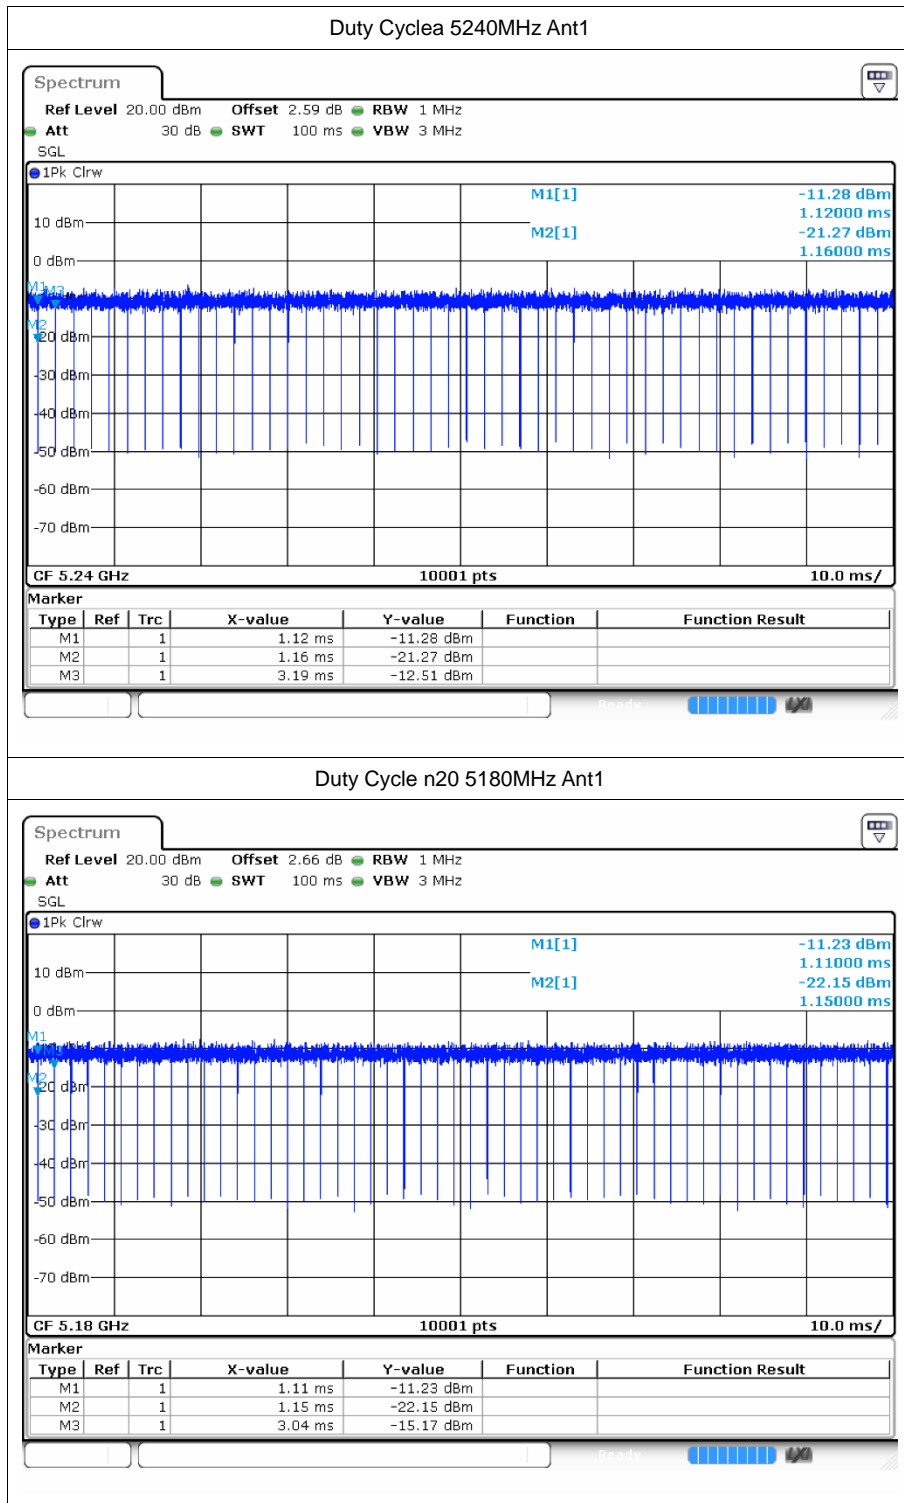


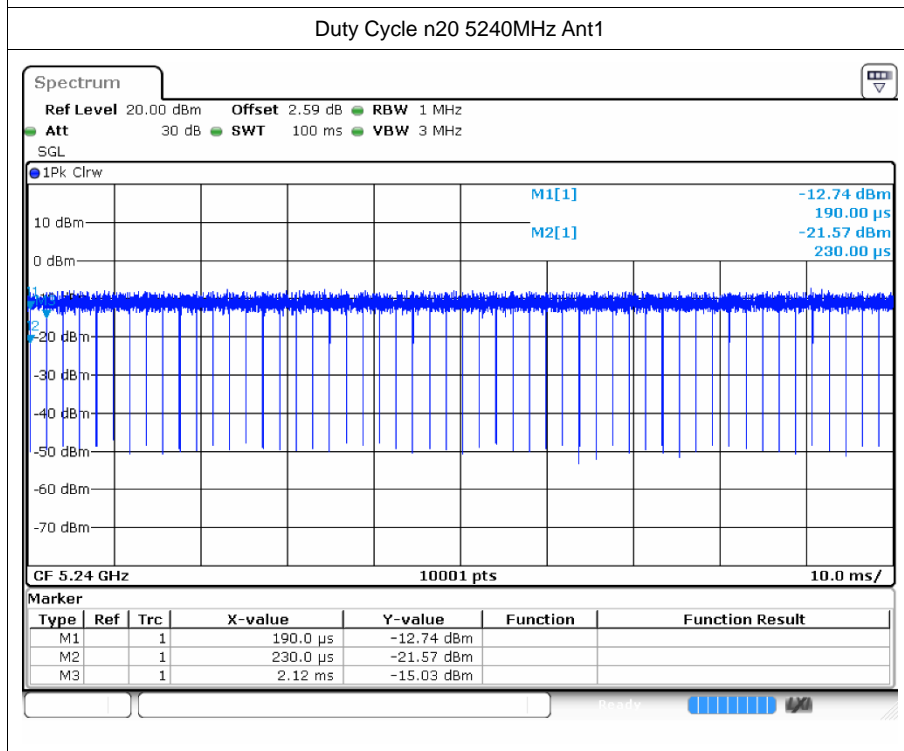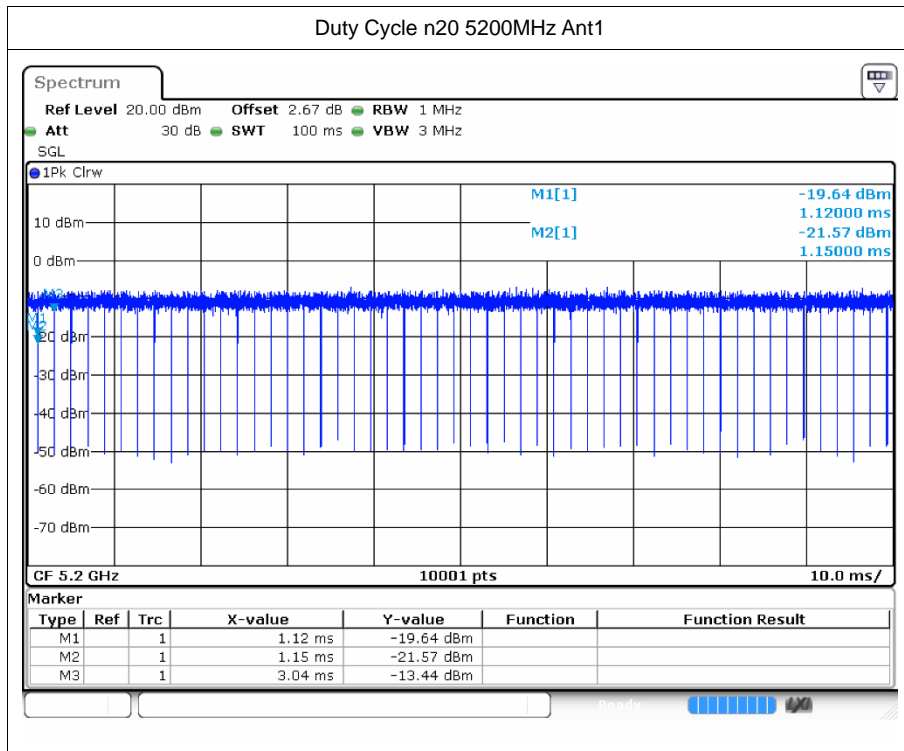


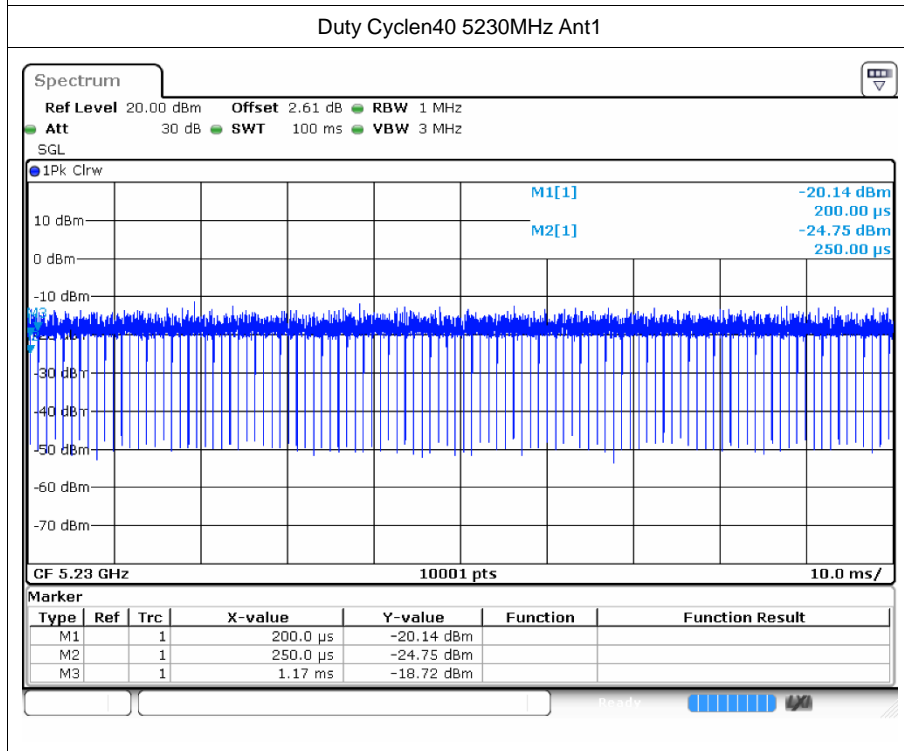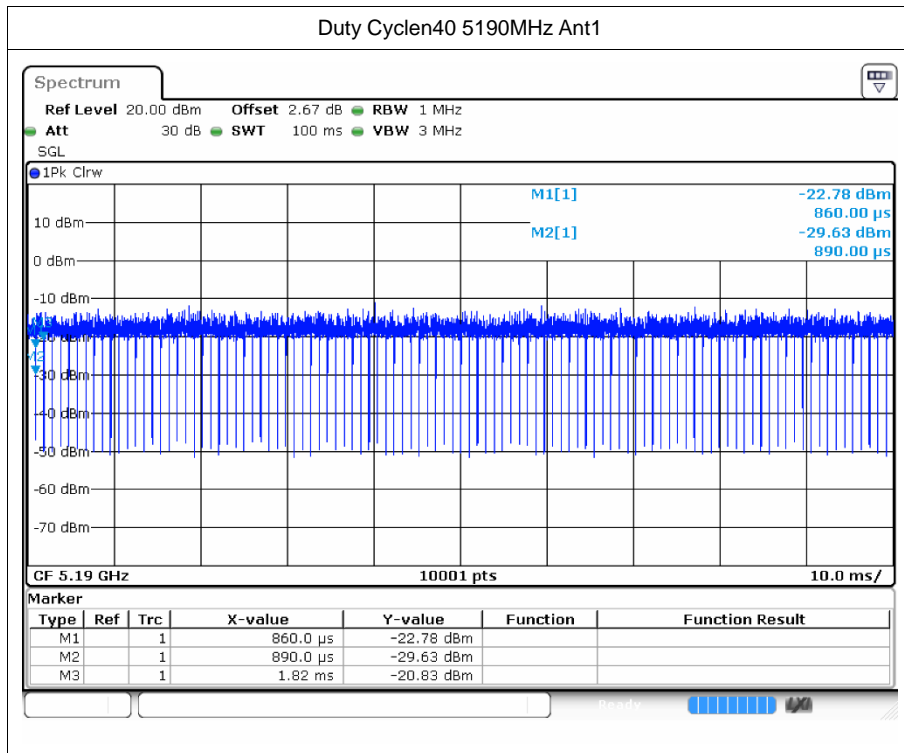

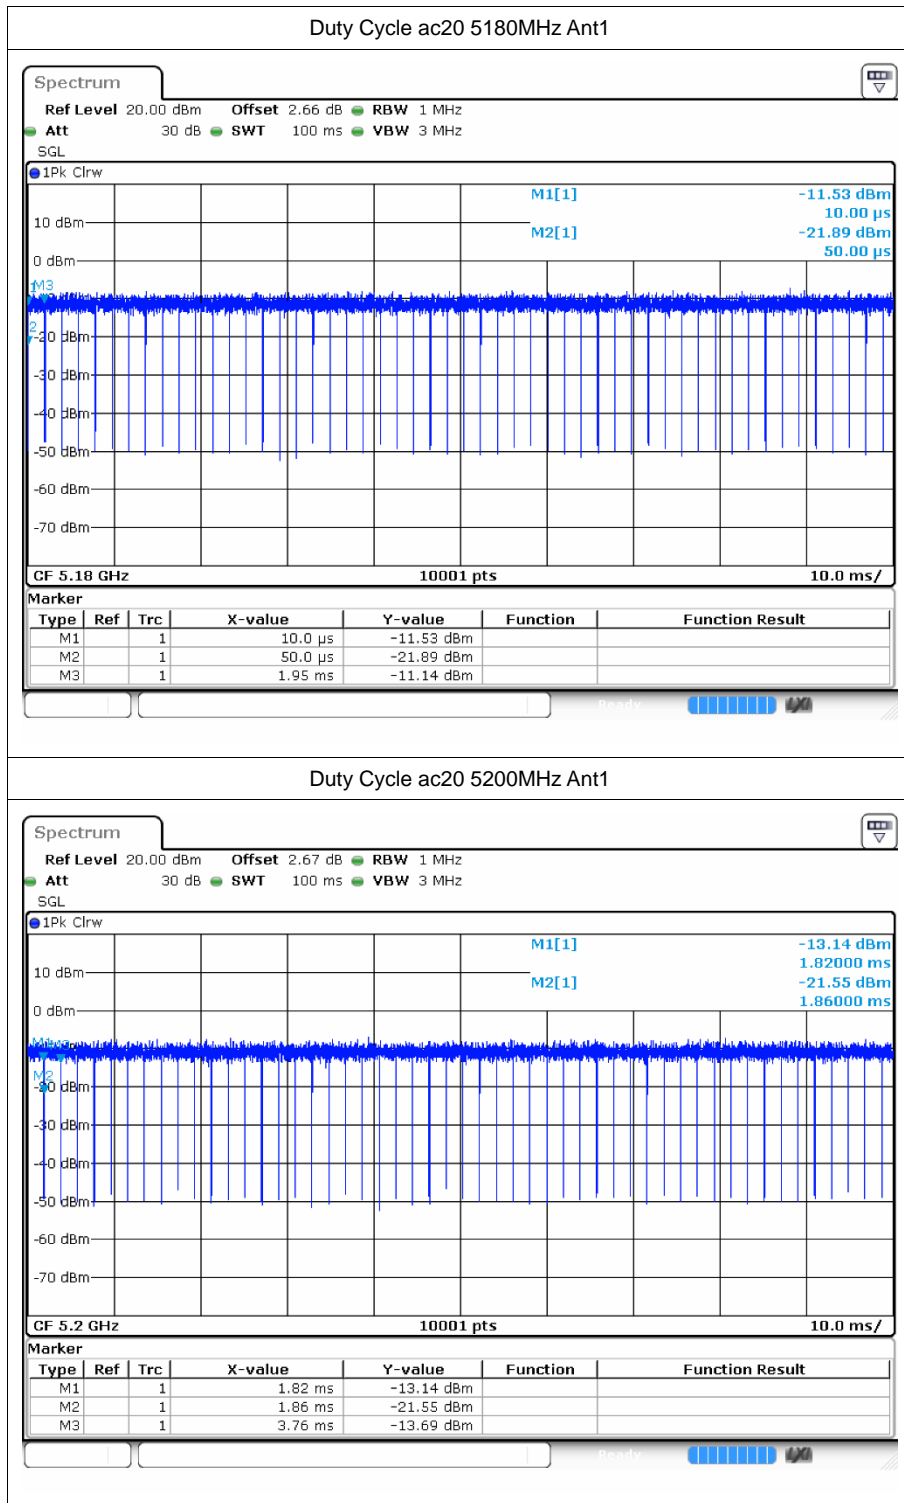



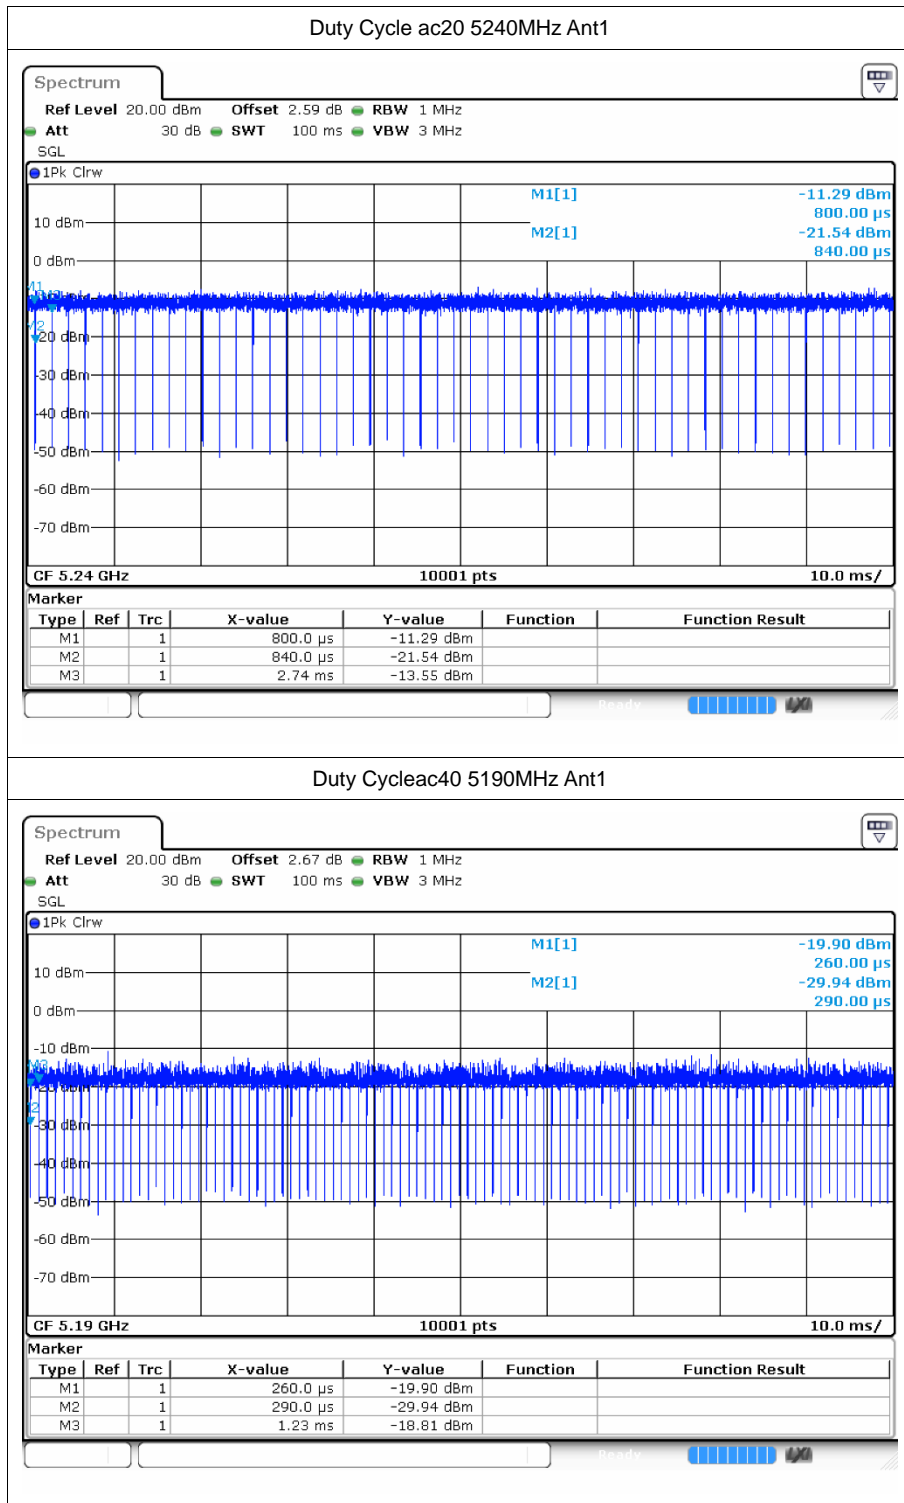

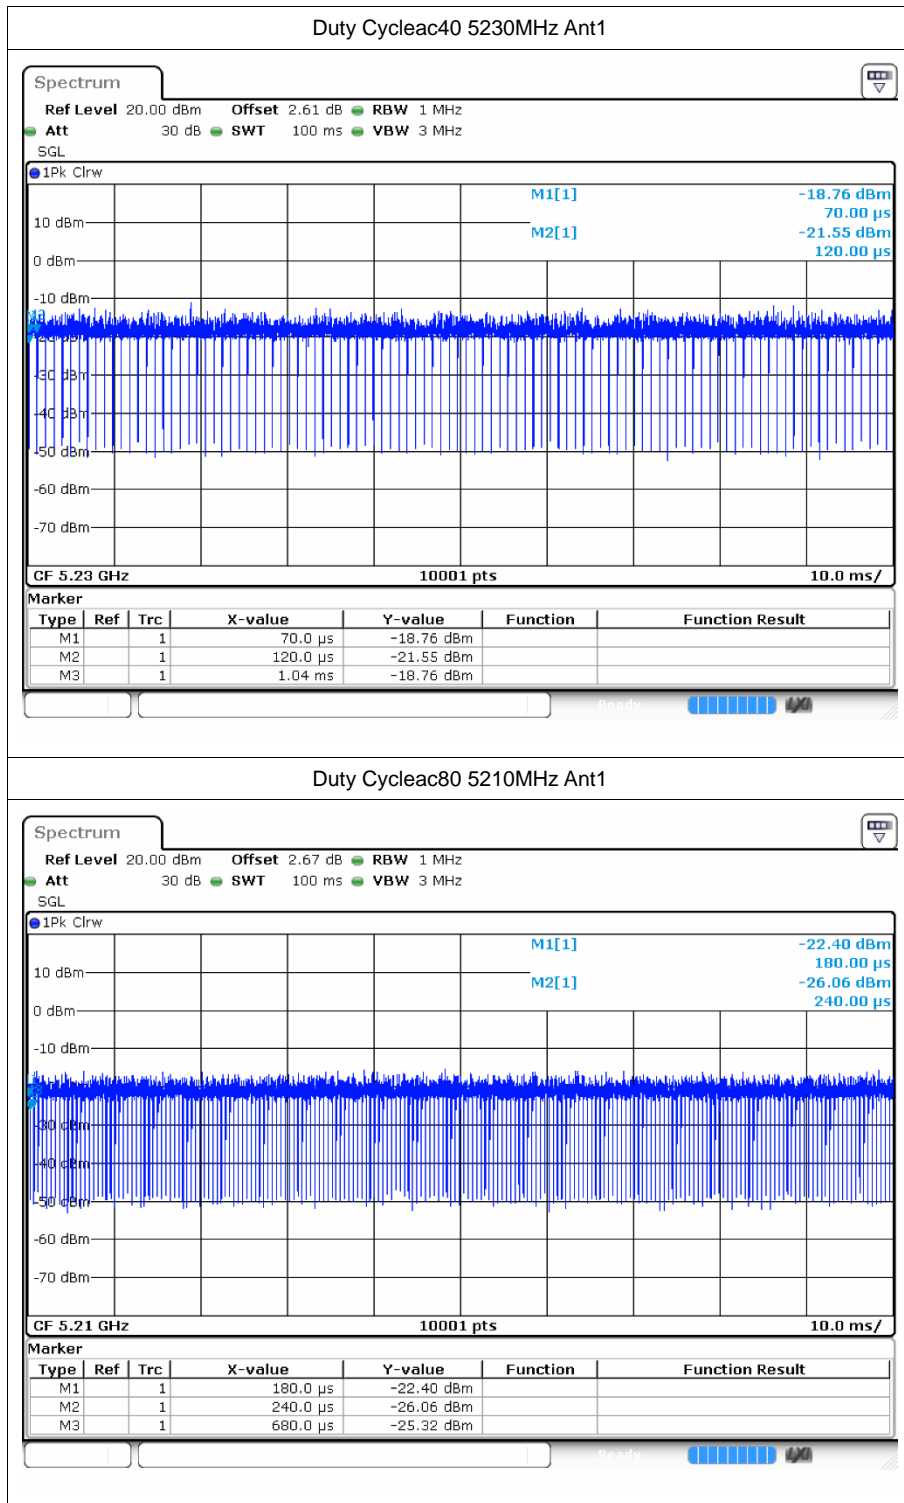



## 2 Maximum Conducted Output Power

### 2.1 Test Result

Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
a	5180	Ant1	-1.77	0.06	-1.71	24	Pass
a	5200	Ant1	-1.49	0.05	-1.44	24	Pass
a	5240	Ant1	-1.78	0.05	-1.73	24	Pass
n20	5180	Ant1	-1.06	0.06	-1	24	Pass
n20	5200	Ant1	-1.71	0.06	-1.65	24	Pass
n20	5240	Ant1	-1.92	0.06	-1.86	24	Pass
n40	5190	Ant1	-1.15	0.13	-1.02	24	Pass
n40	5230	Ant1	-1.35	0.14	-1.21	24	Pass
ac20	5180	Ant1	-1.08	0.06	-1.02	24	Pass
ac20	5200	Ant1	-1.81	0.06	-1.75	24	Pass
ac20	5240	Ant1	-1.95	0.06	-1.89	24	Pass
ac40	5190	Ant1	-2.12	0.14	-1.98	24	Pass
ac40	5230	Ant1	-1.39	0.15	-1.24	24	Pass
ac80	5210	Ant1	-1.77	0.42	-1.35	24	Pass




### 3 -26dB Bandwidth



#### 3.1 Test Result



Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Limit -26 dB Bandwidth (MHz)	Verdict
a	5180	Ant1	22.26	0.5	Pass
a	5200	Ant1	21.99	0.5	Pass
a	5240	Ant1	22.2	0.5	Pass
n20	5180	Ant1	23.931	0.5	Pass
n20	5200	Ant1	22.8	0.5	Pass
n20	5240	Ant1	21.867	0.5	Pass
n40	5190	Ant1	40.734	0.5	Pass
n40	5230	Ant1	41.316	0.5	Pass
ac20	5180	Ant1	22.53	0.5	Pass
ac20	5200	Ant1	22.815	0.5	Pass
ac20	5240	Ant1	22.905	0.5	Pass
ac40	5190	Ant1	40.902	0.5	Pass
ac40	5230	Ant1	40.77	0.5	Pass
ac80	5210	Ant1	81.66	0.5	Pass





### 3.2 Test Graphs


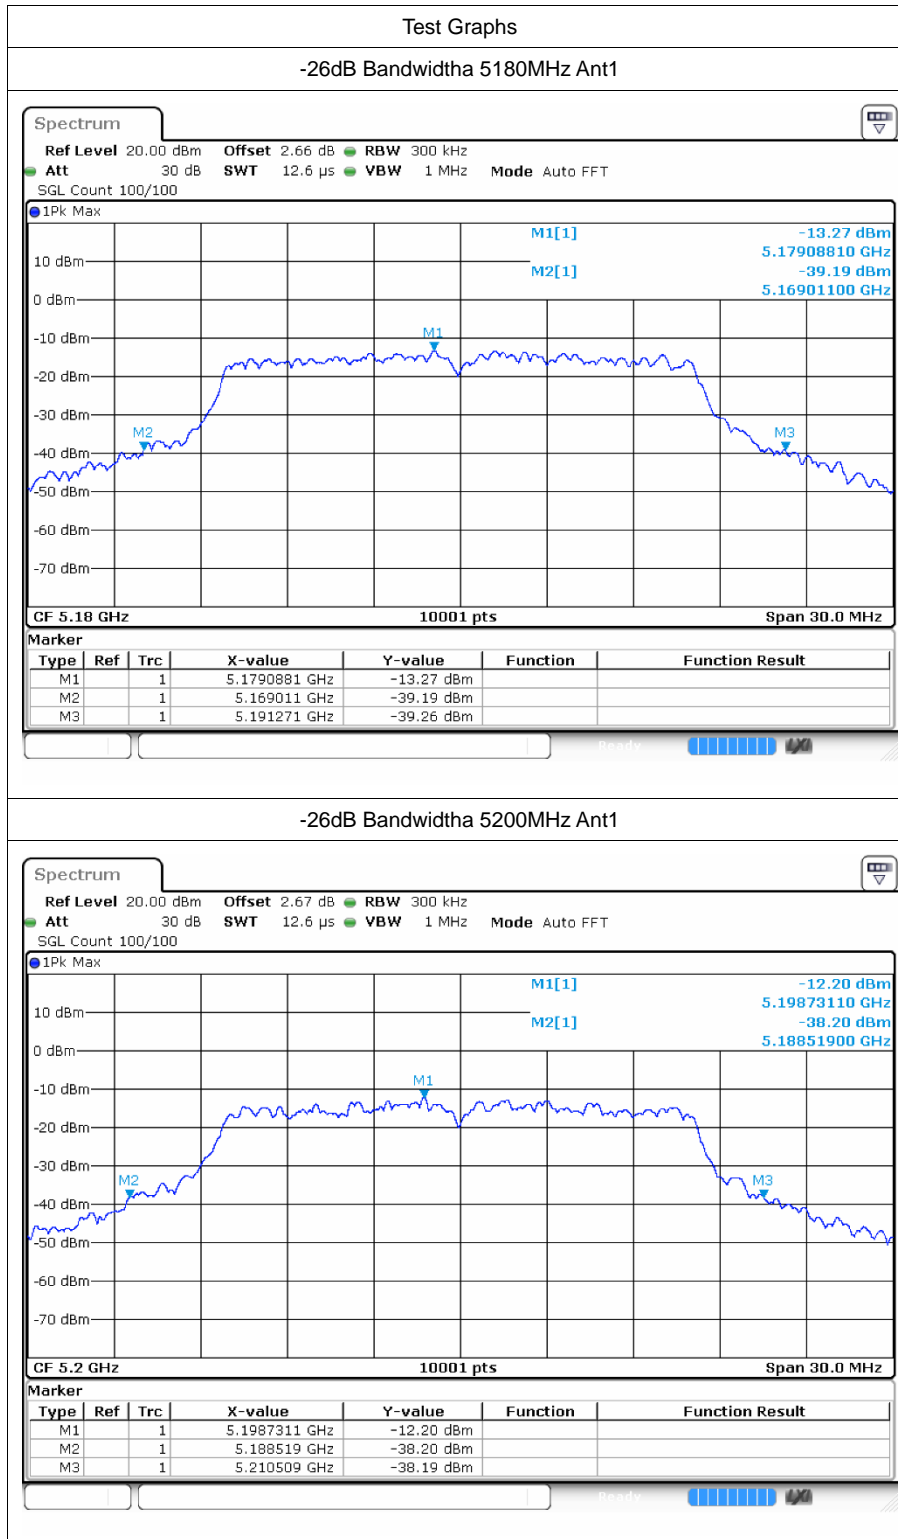


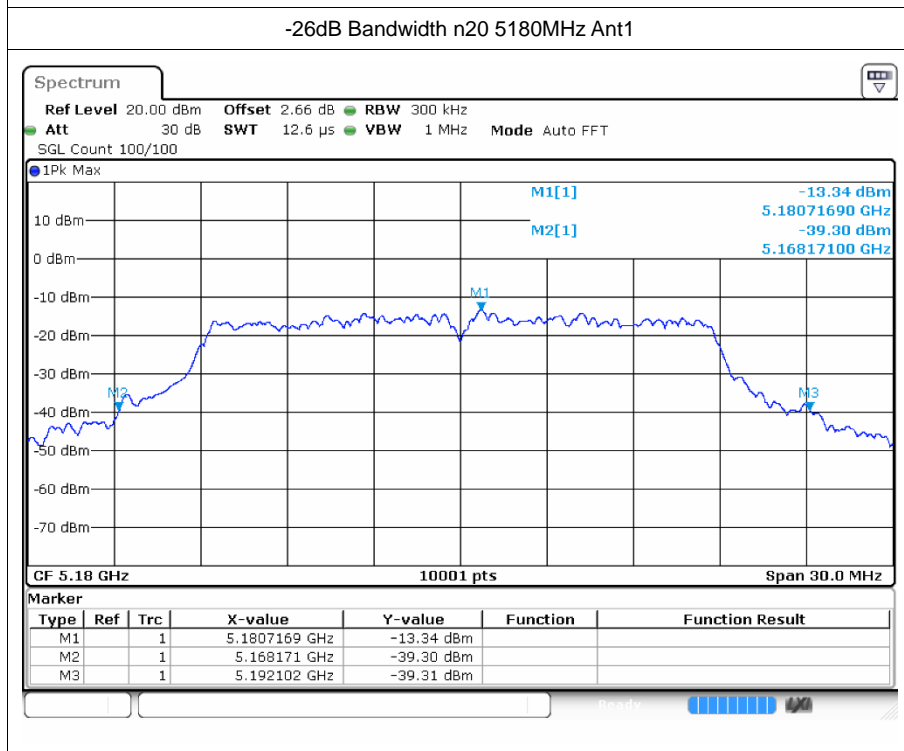
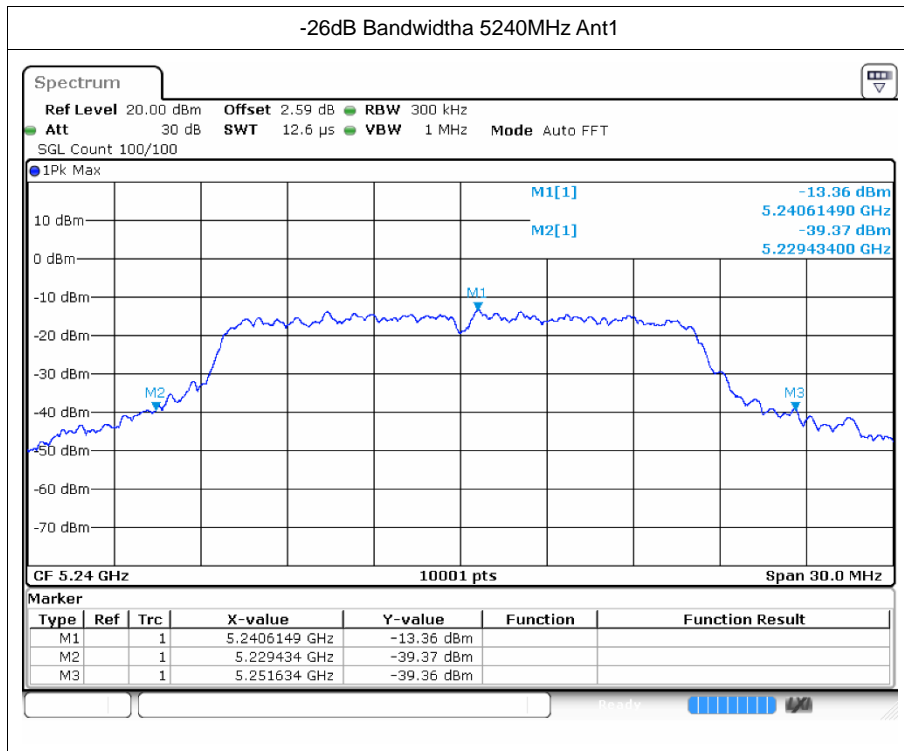


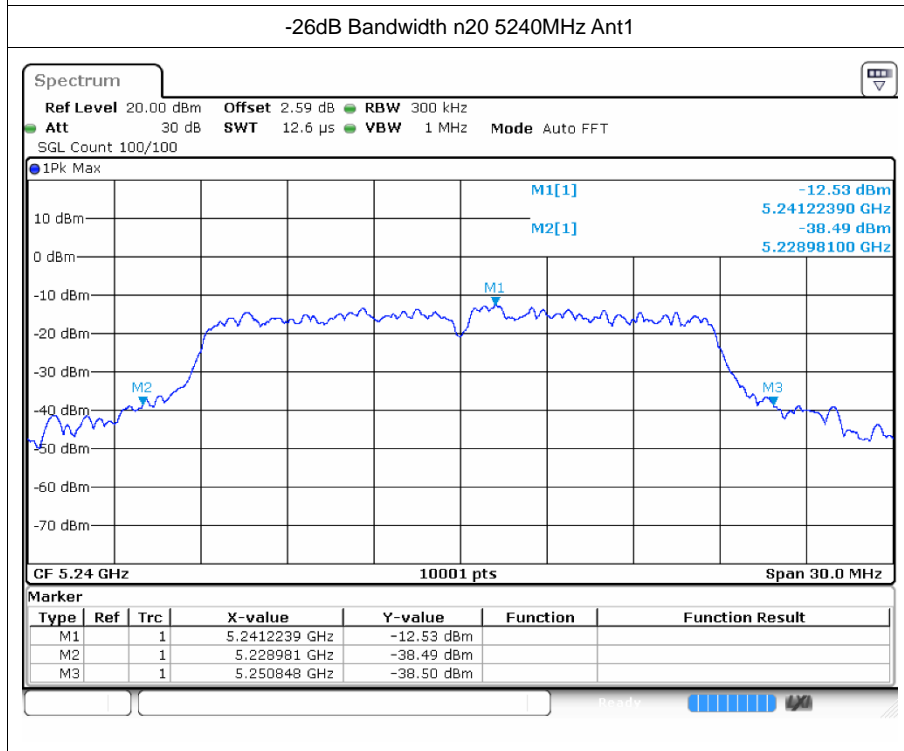
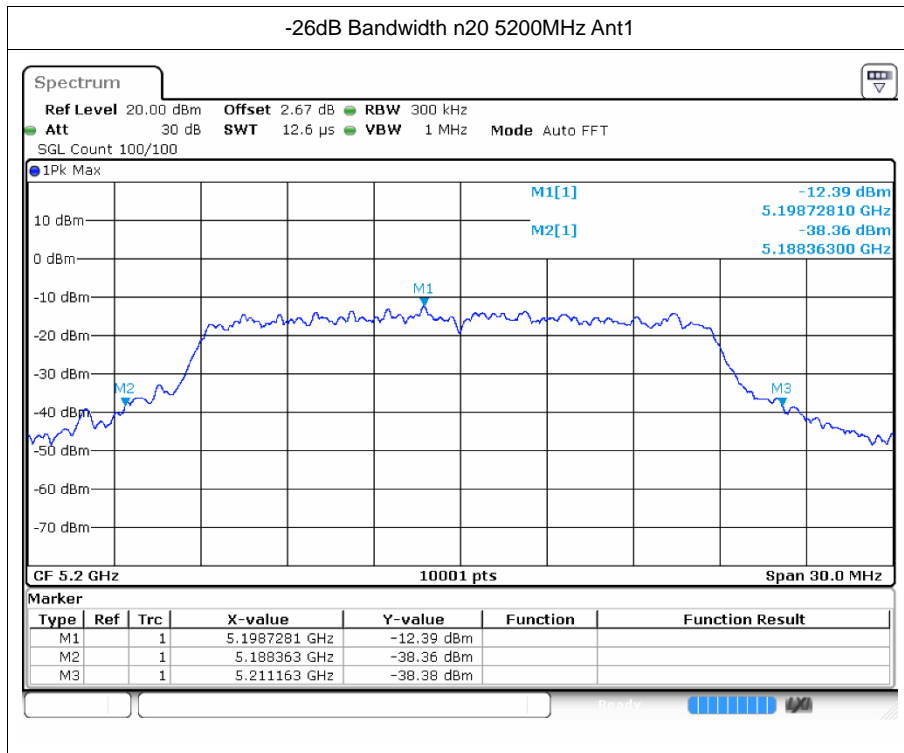


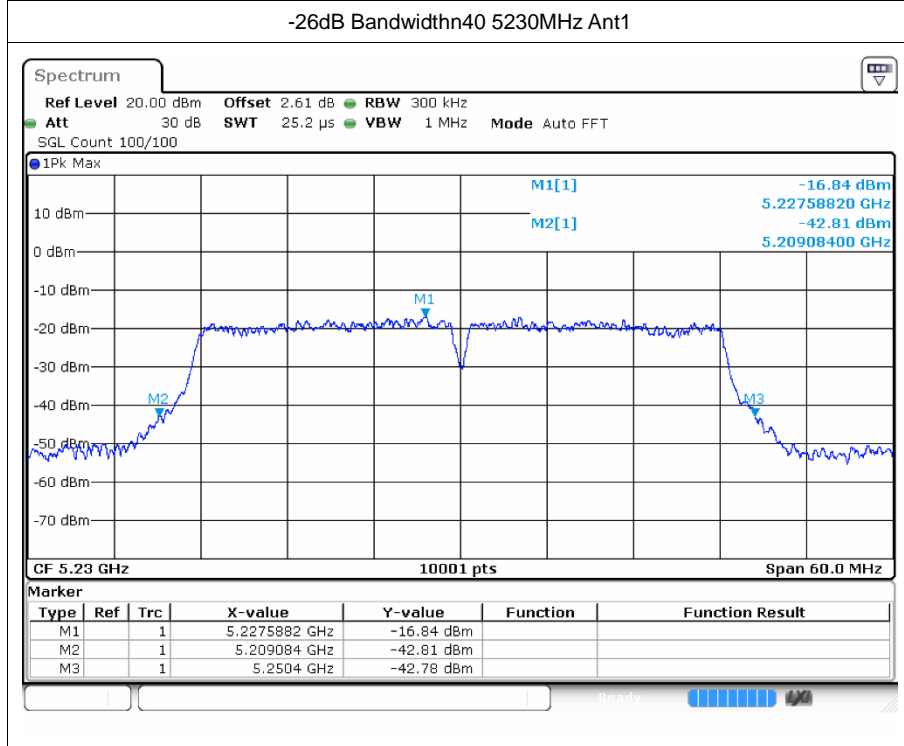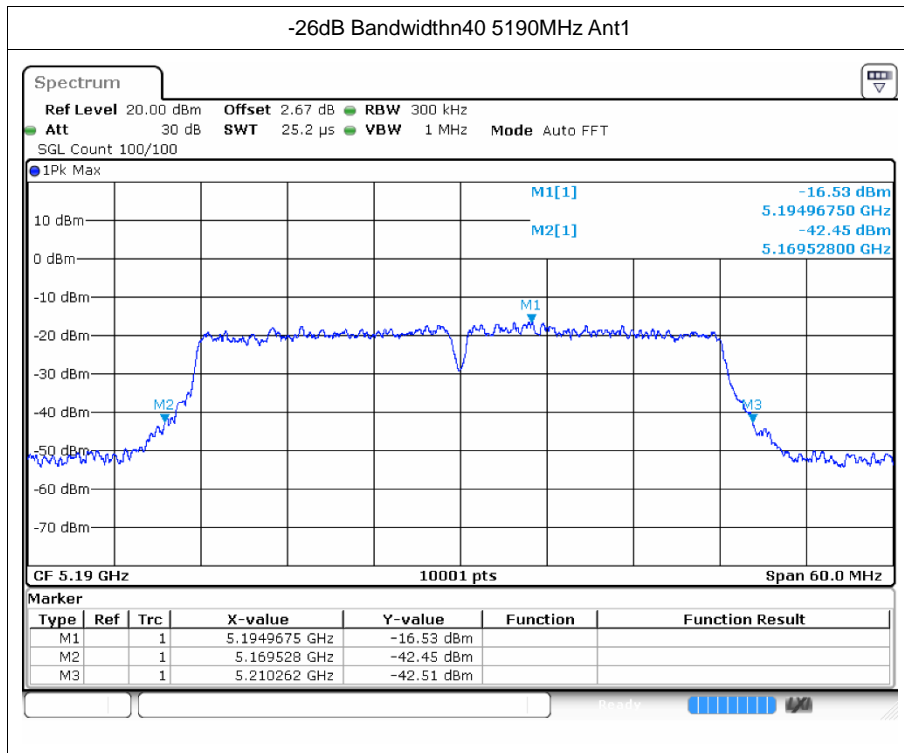



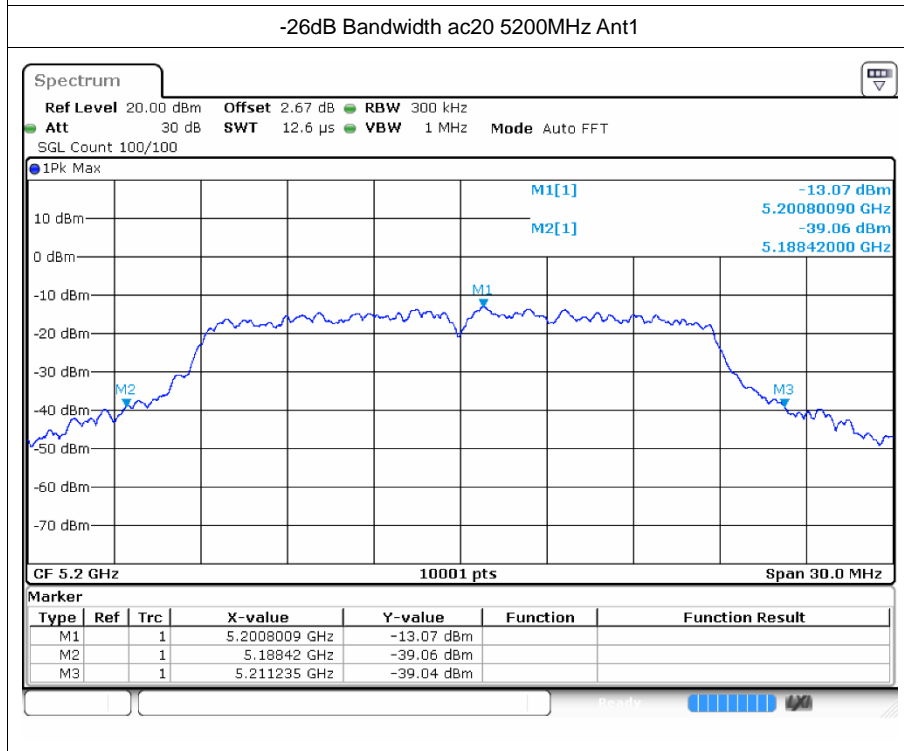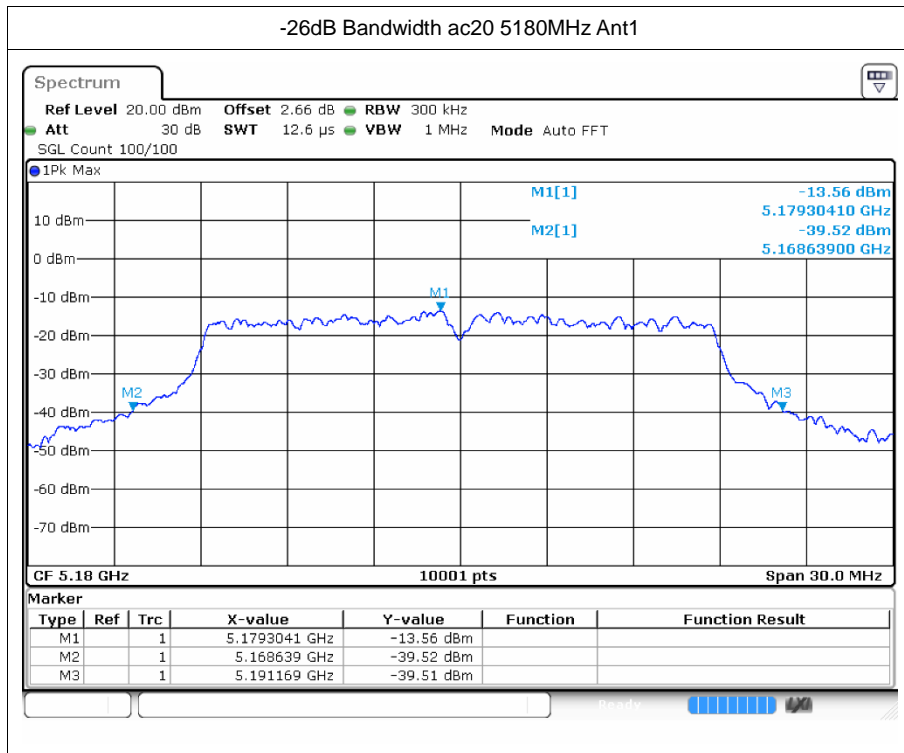

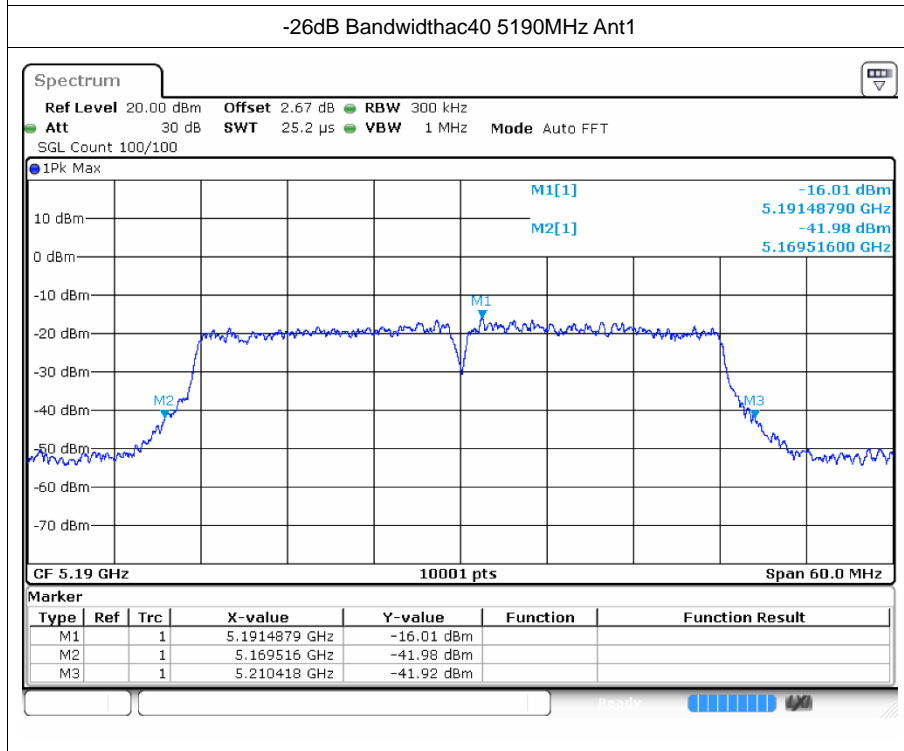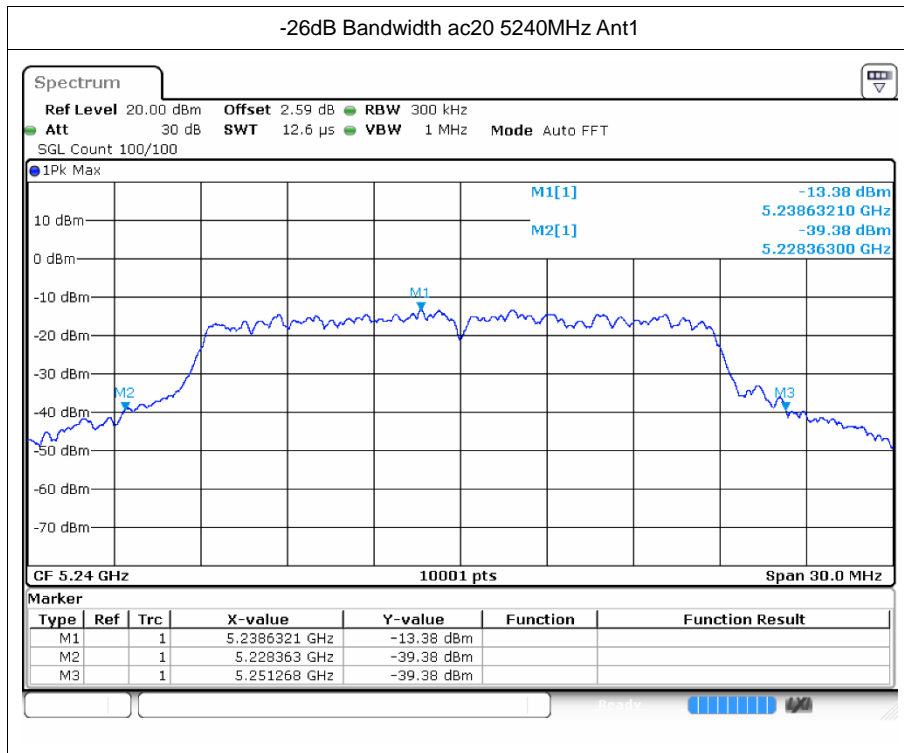

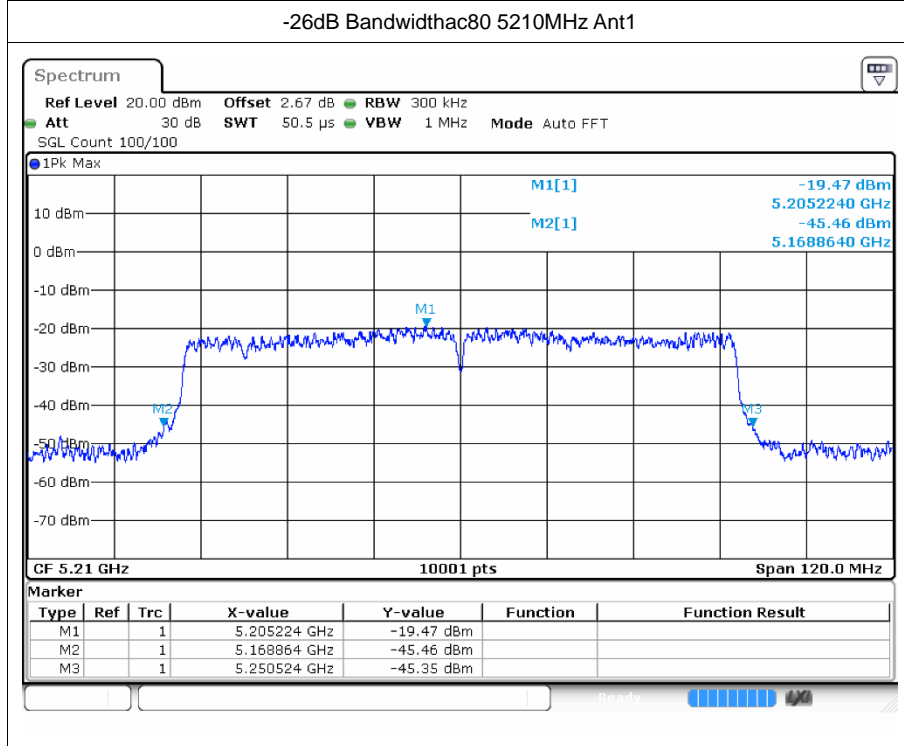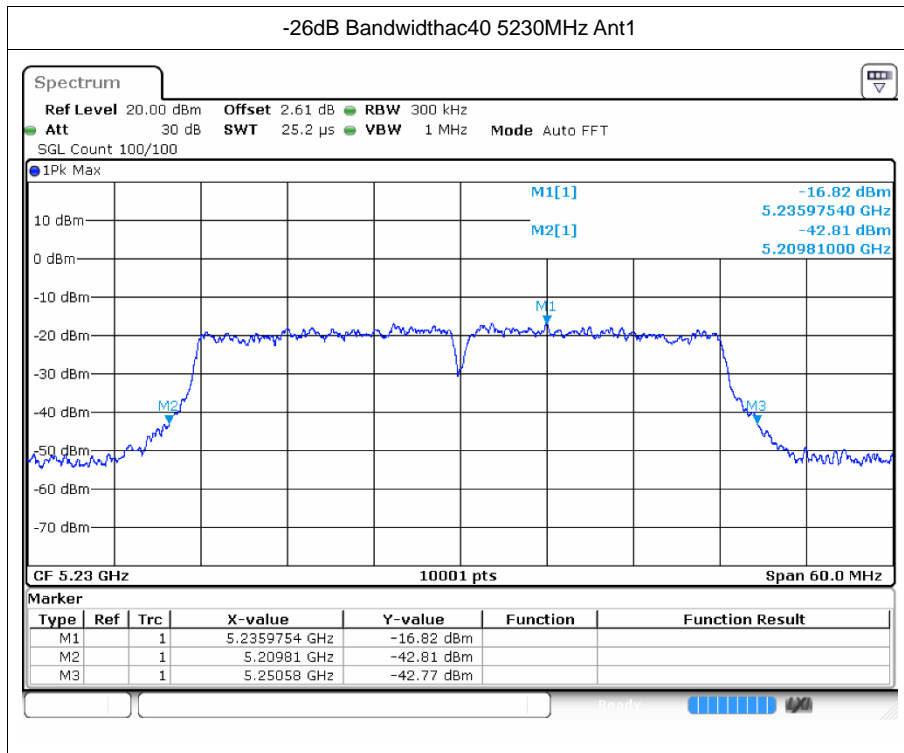





## 4 Occupied Channel Bandwidth


### 4.1 Test Result


Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
a	5180	Ant1	16.516
a	5200	Ant1	16.513
a	5240	Ant1	16.486
n20	5180	Ant1	17.656
n20	5200	Ant1	17.698
n20	5240	Ant1	17.674
n40	5190	Ant1	36.272
n40	5230	Ant1	36.29
ac20	5180	Ant1	17.728
ac20	5200	Ant1	17.785
ac20	5240	Ant1	17.767
ac40	5190	Ant1	36.332
ac40	5230	Ant1	36.212
ac80	5210	Ant1	75.436

## 4.2 Test Graphs

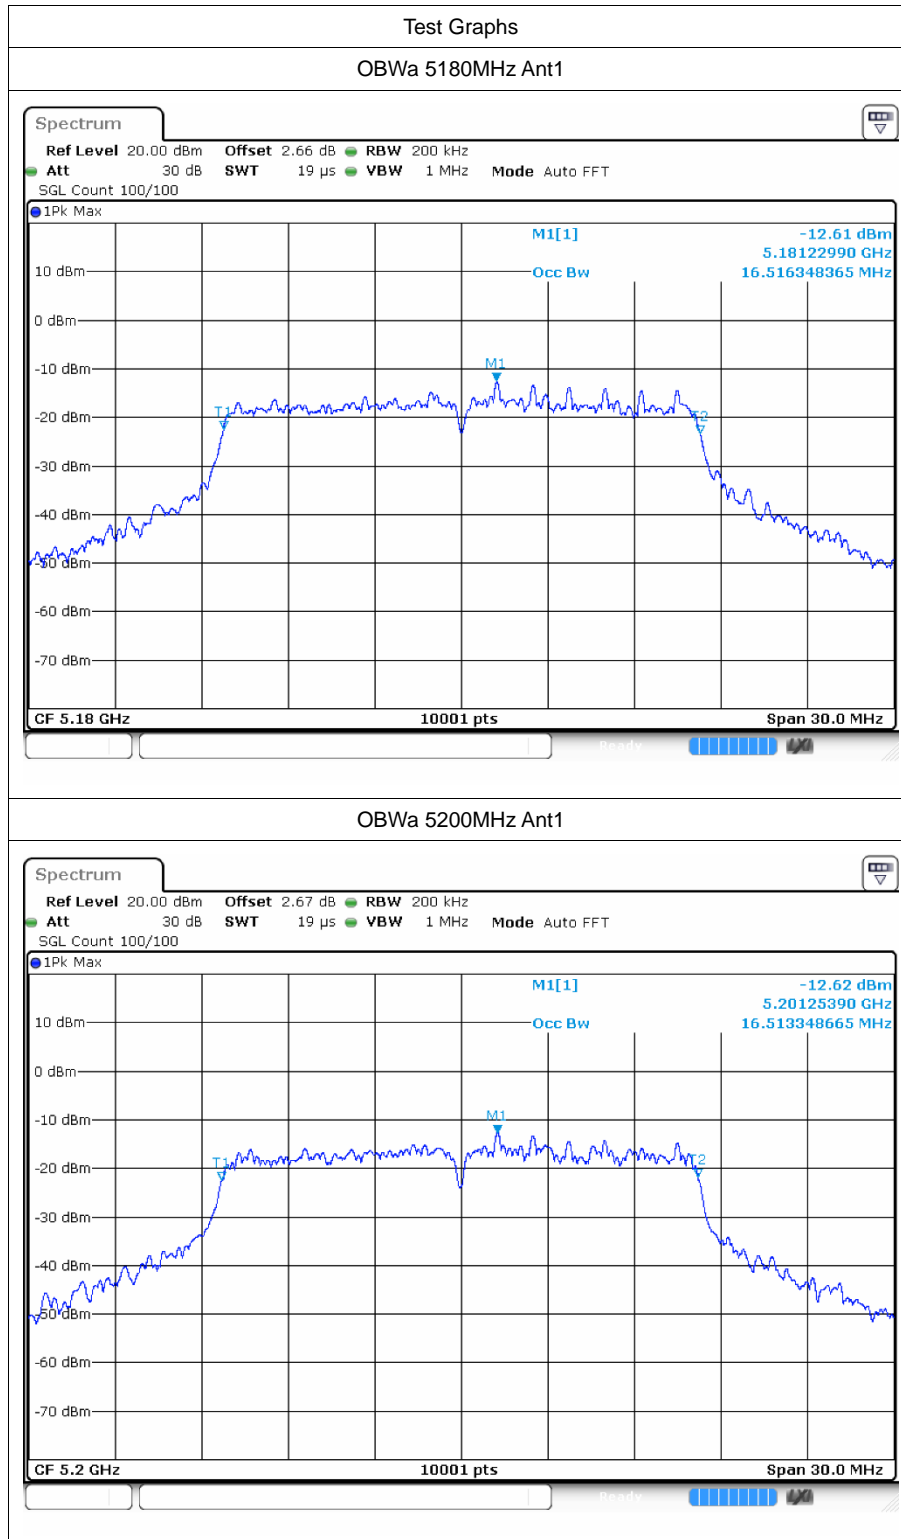


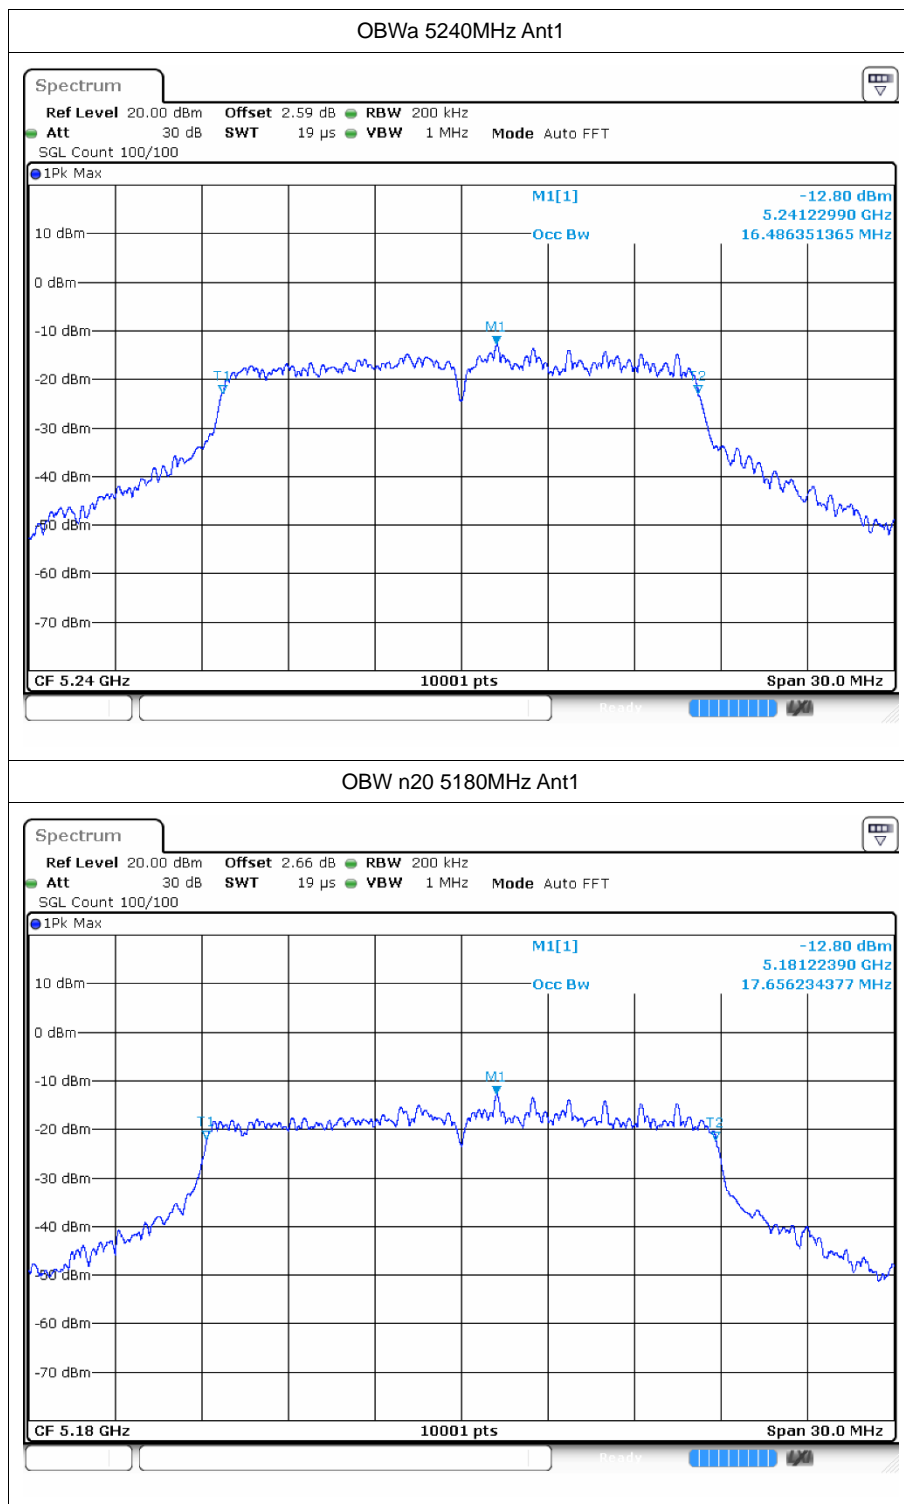


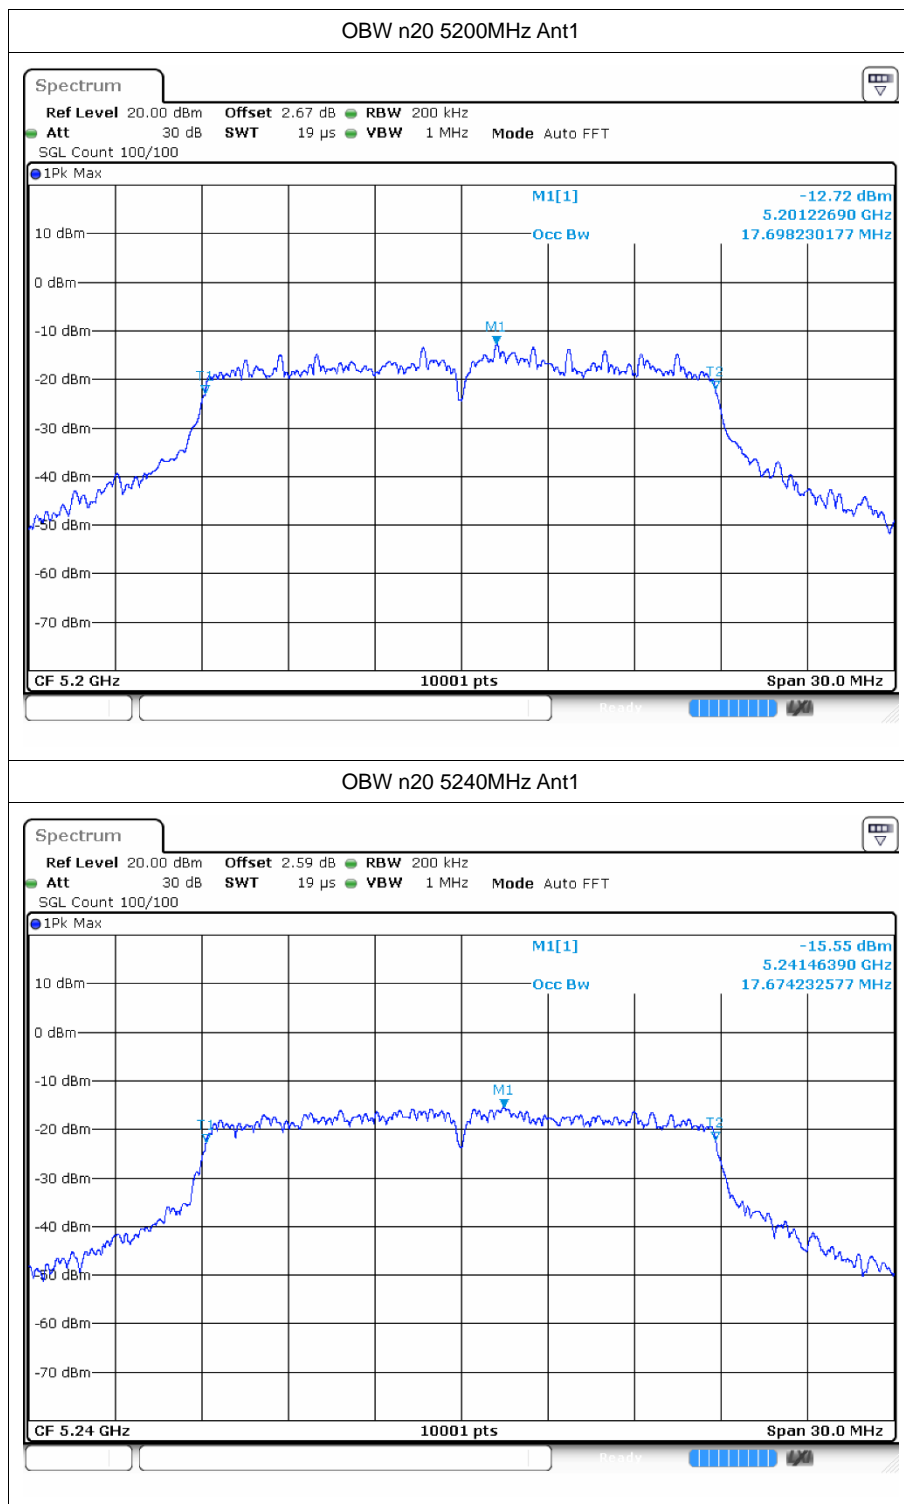


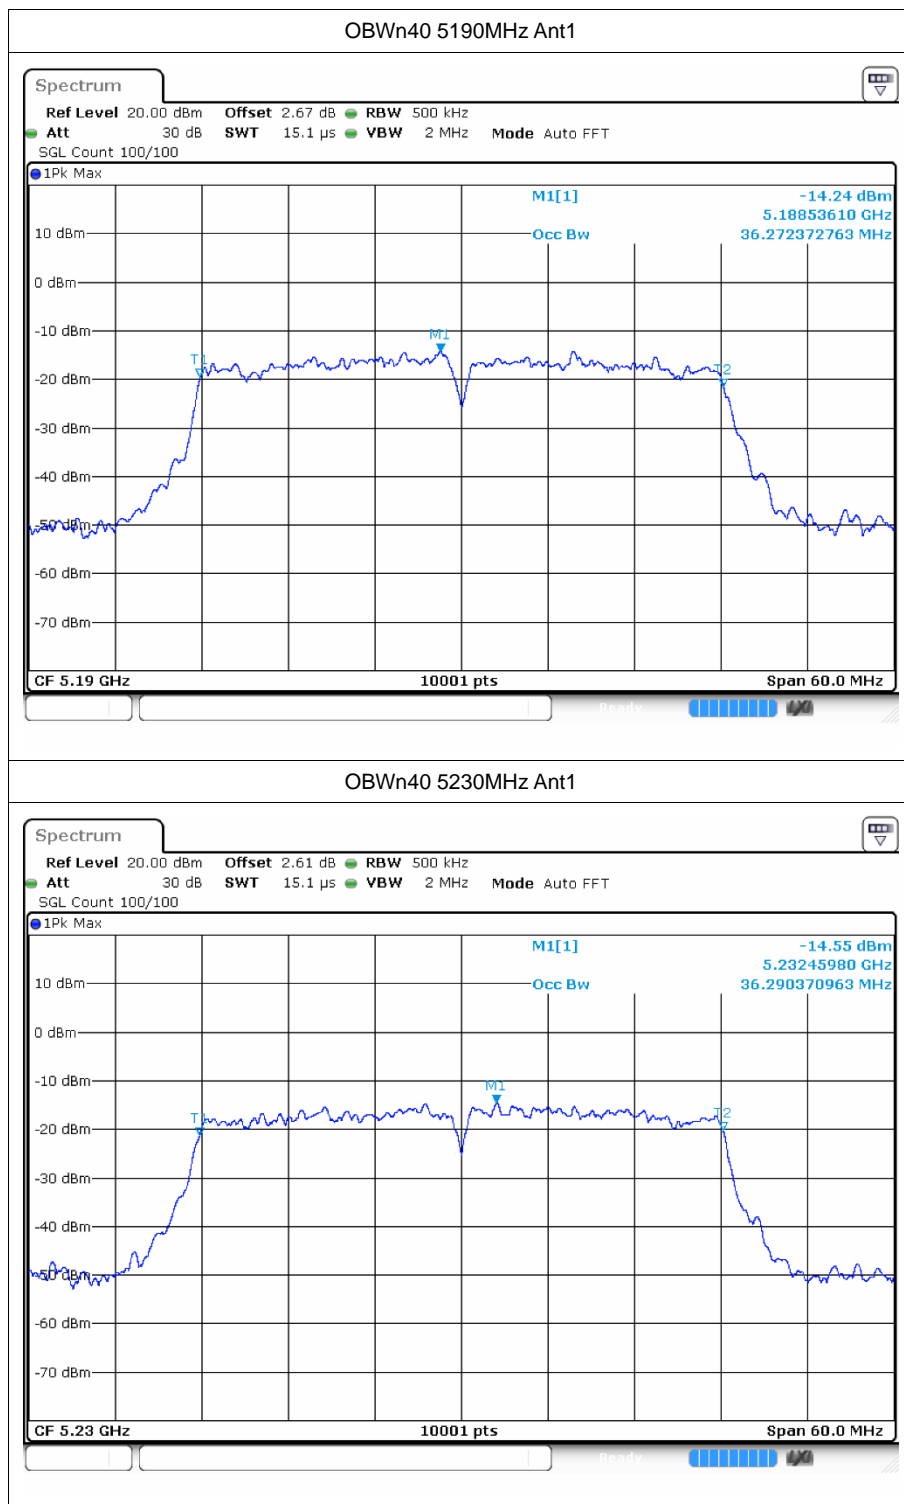



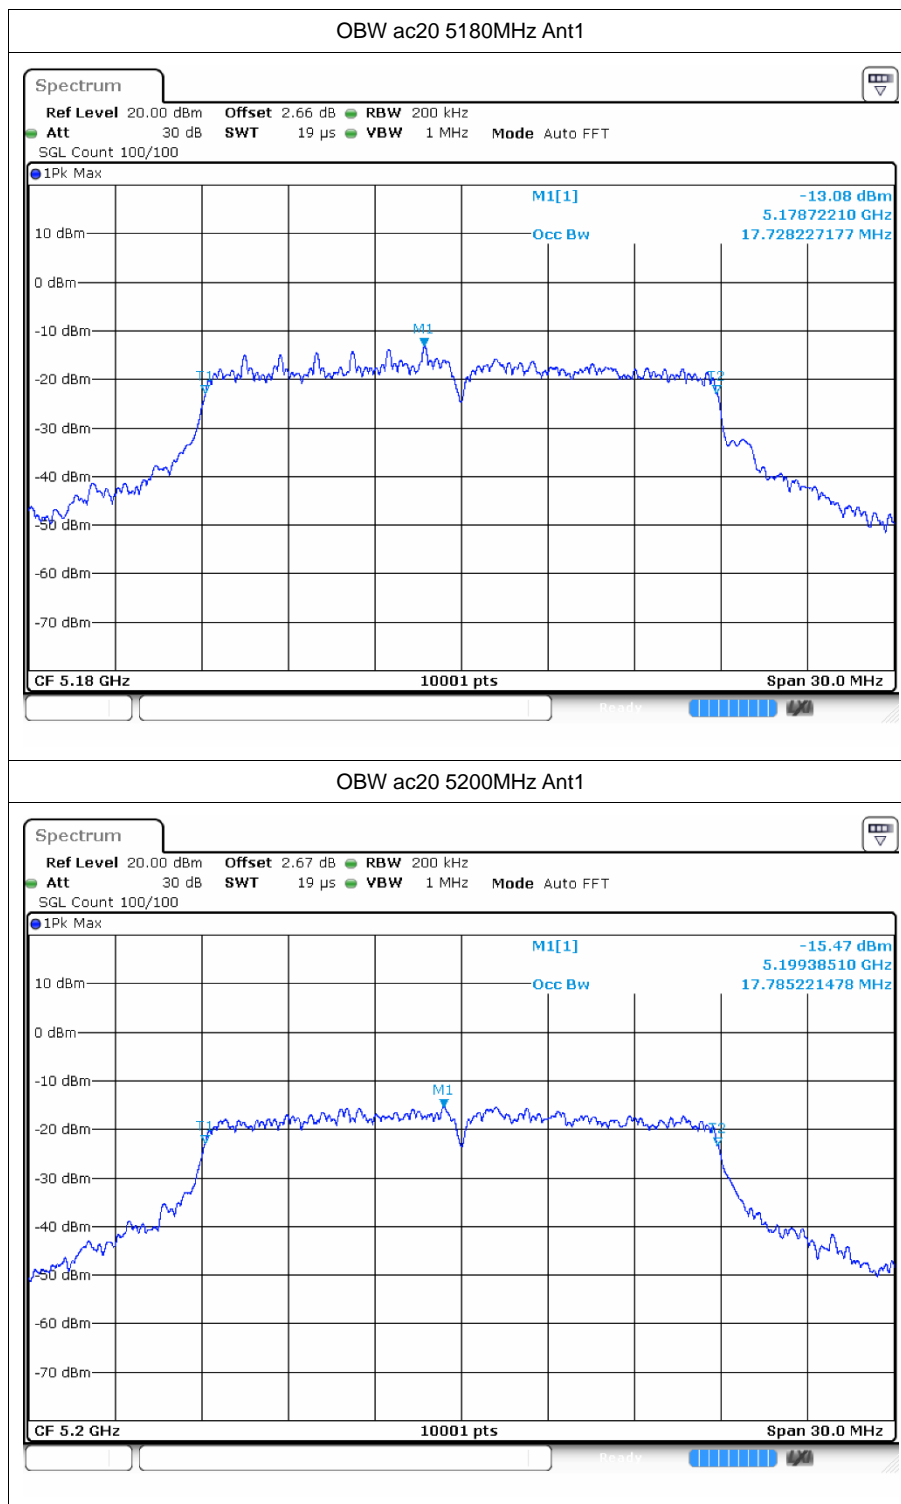

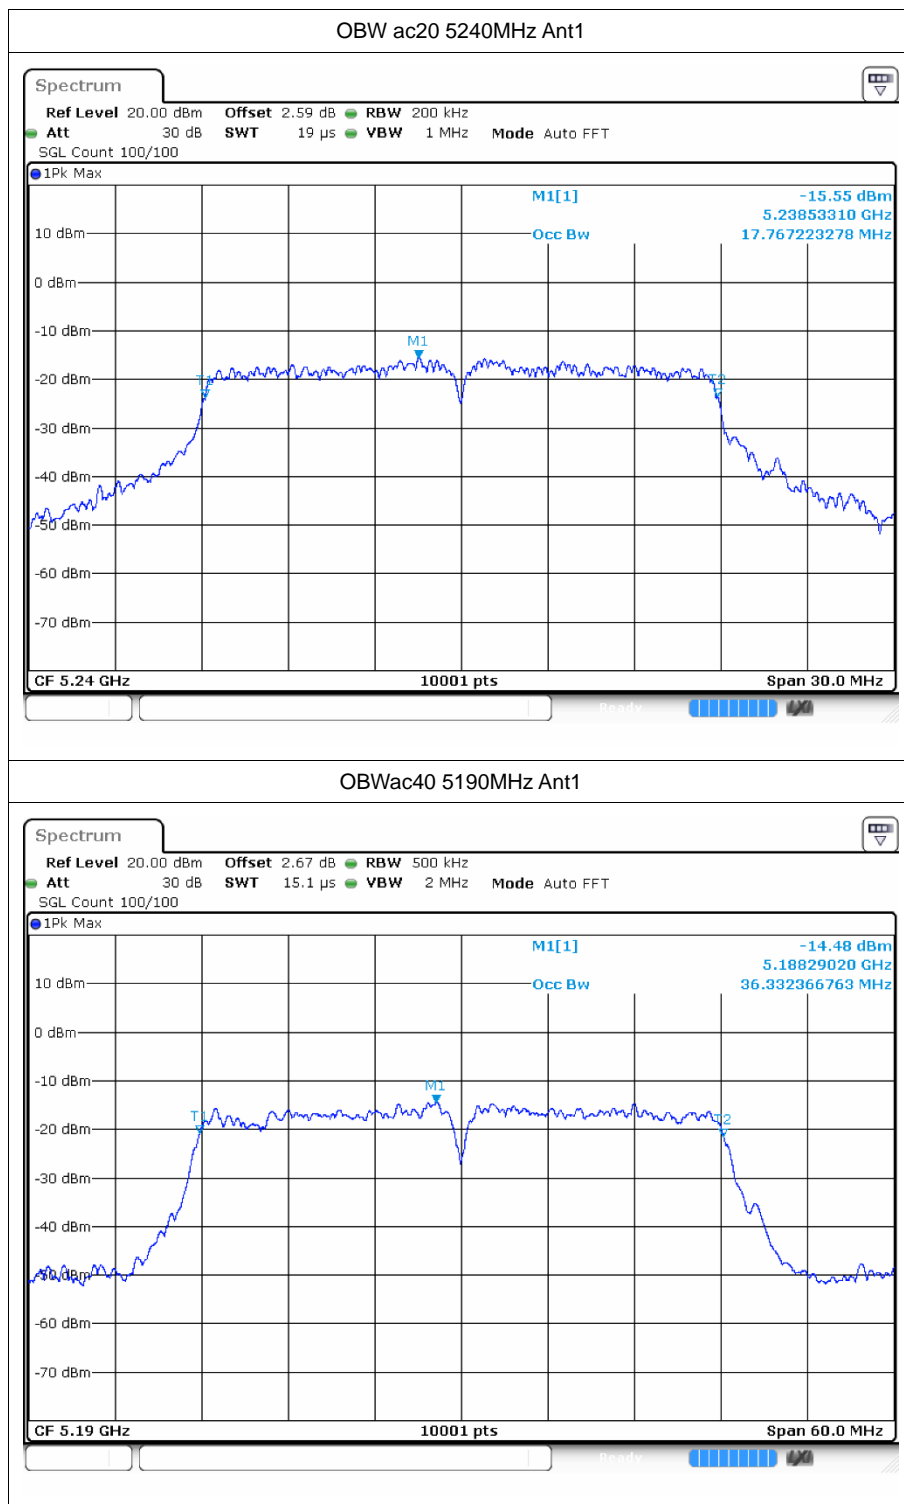

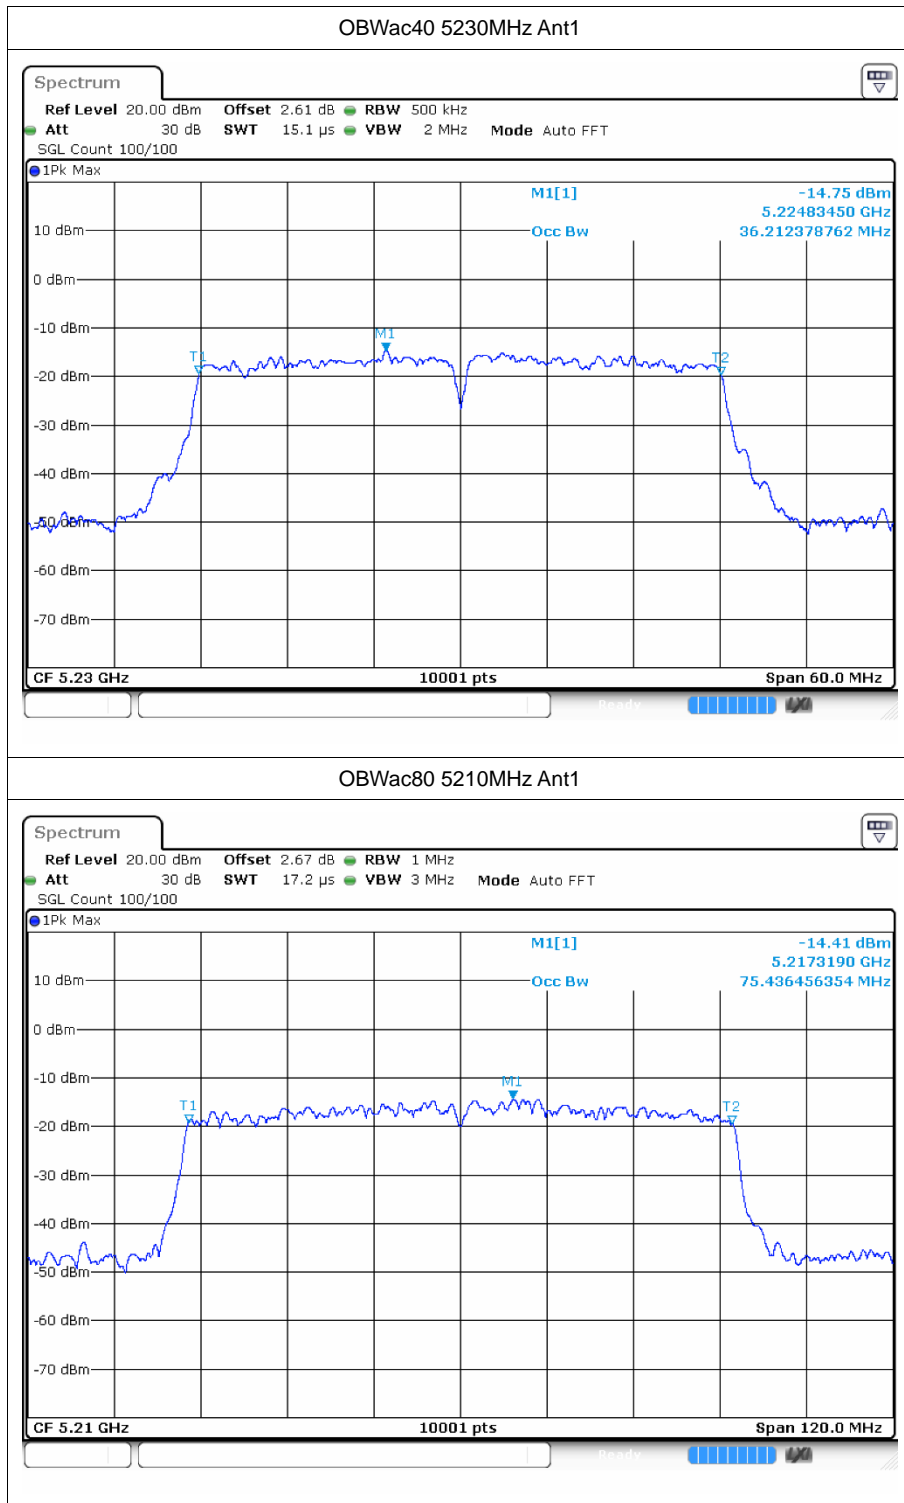





## 5 Maximum Power Spectral Density Level


### 5.1 Test Result


Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm)	Duty Factor (dB)	Total PSD (dBm)	Limit (dBm)	Verdict
a	5180	Ant1	-7.86	0.06	-7.80	11	Pass
a	5200	Ant1	-8.06	0.05	-8.01	11	Pass
a	5240	Ant1	-7.79	0.05	-7.74	11	Pass
n20	5180	Ant1	-8.09	0.06	-8.03	11	Pass
n20	5200	Ant1	-7.39	0.06	-7.33	11	Pass
n20	5240	Ant1	-8.31	0.06	-8.25	11	Pass
n40	5190	Ant1	-11.19	0.13	-11.06	11	Pass
n40	5230	Ant1	-10.97	0.14	-10.83	11	Pass
ac20	5180	Ant1	-8.86	0.06	-8.80	11	Pass
ac20	5200	Ant1	-7.9	0.06	-7.84	11	Pass
ac20	5240	Ant1	-7.87	0.06	-7.81	11	Pass
ac40	5190	Ant1	-11.14	0.14	-11.00	11	Pass
ac40	5230	Ant1	-11.77	0.15	-11.62	11	Pass
ac80	5210	Ant1	-14.36	0.42	-13.94	11	Pass

## 5.2 Test Graphs

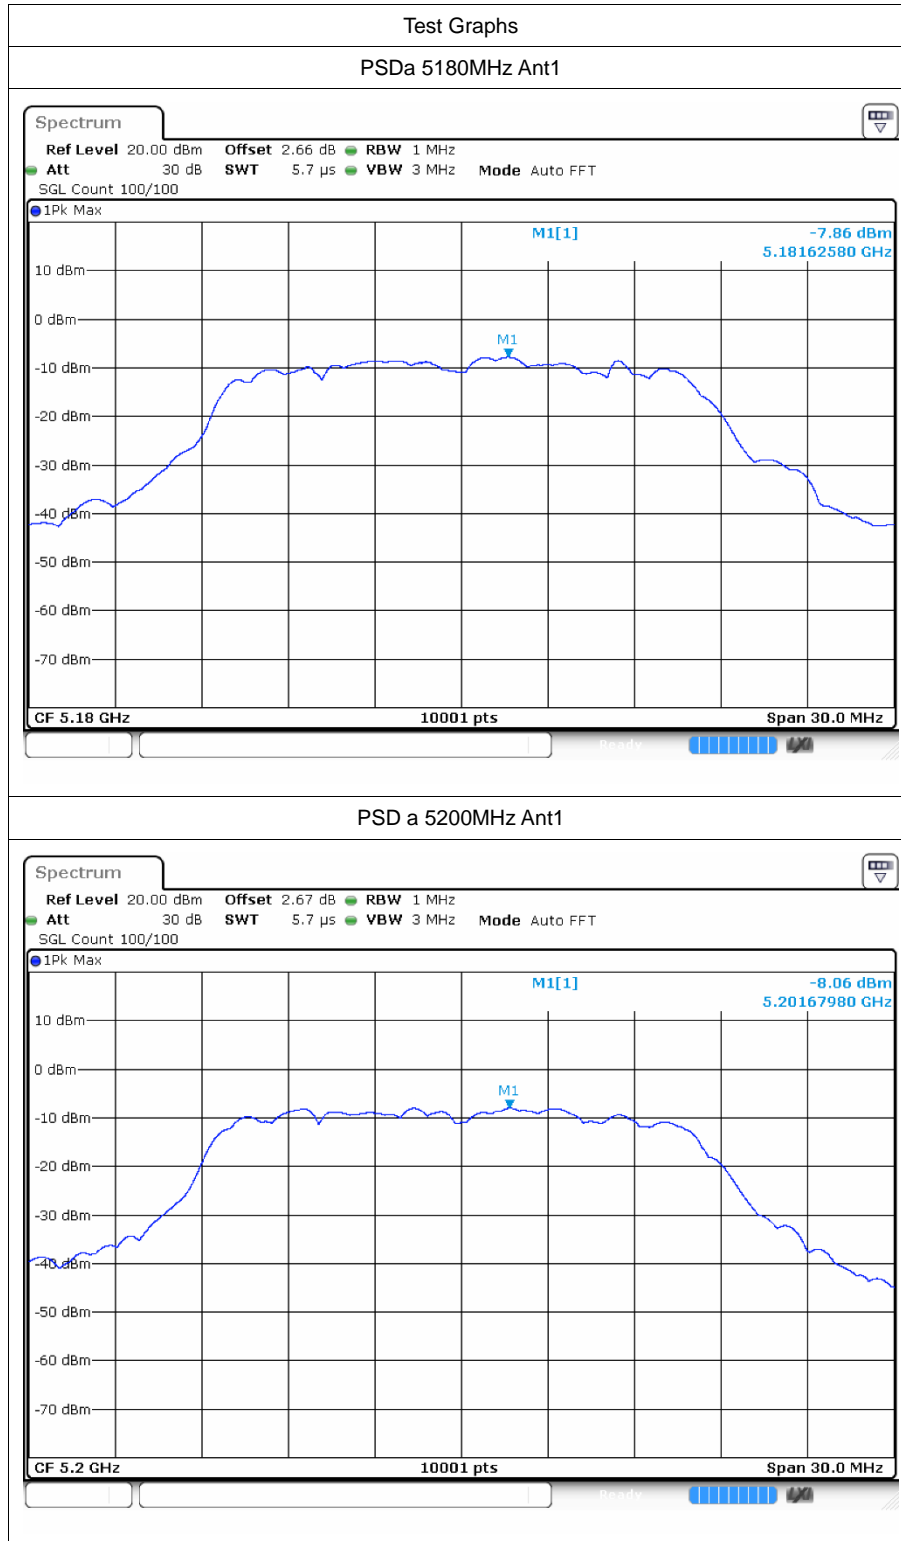


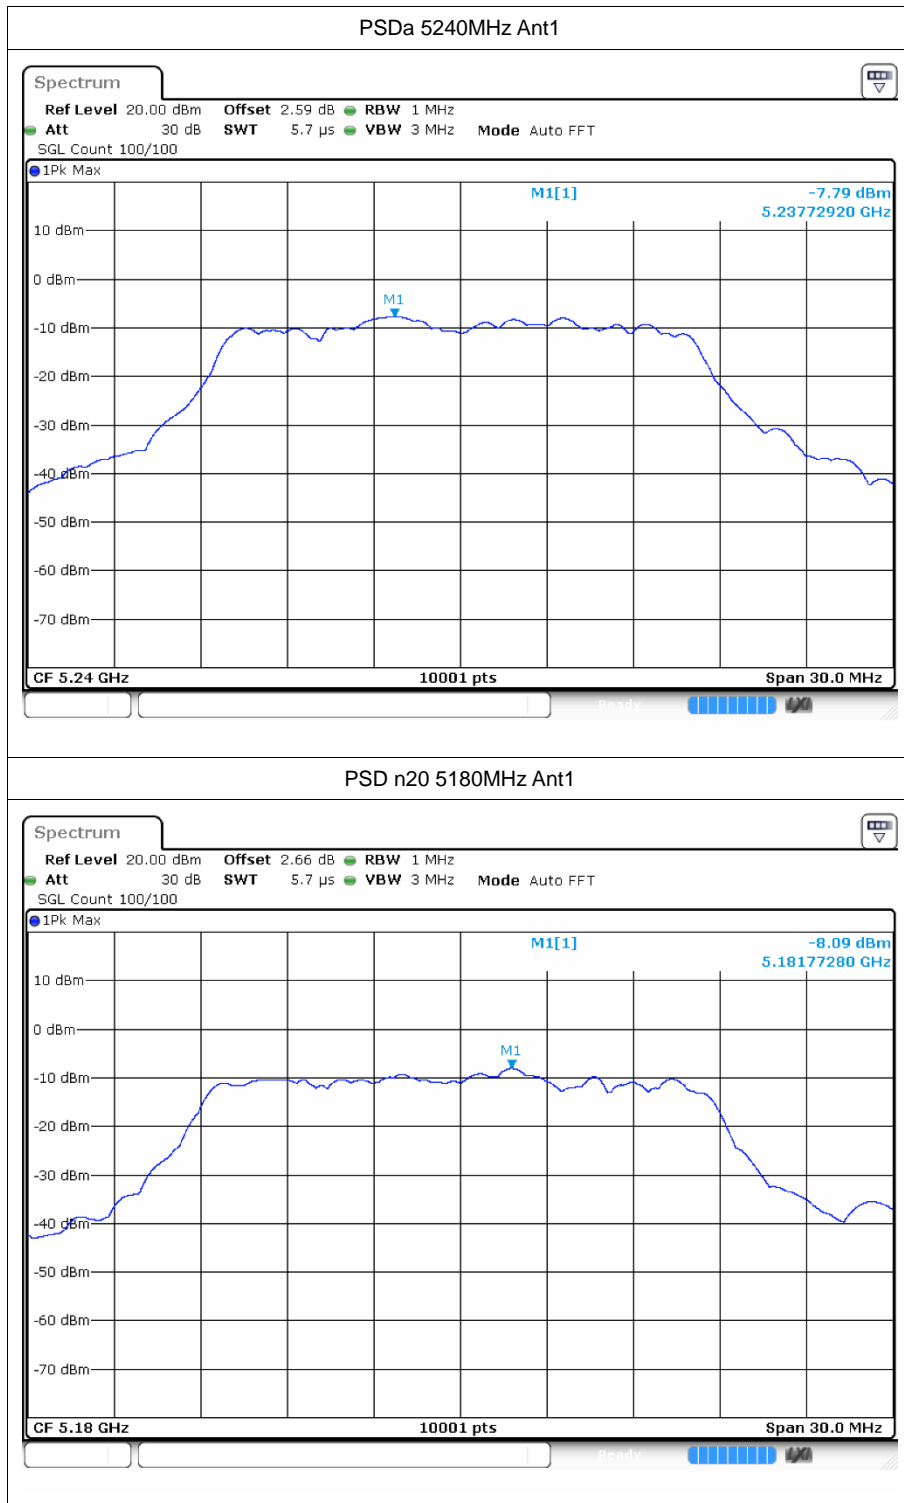


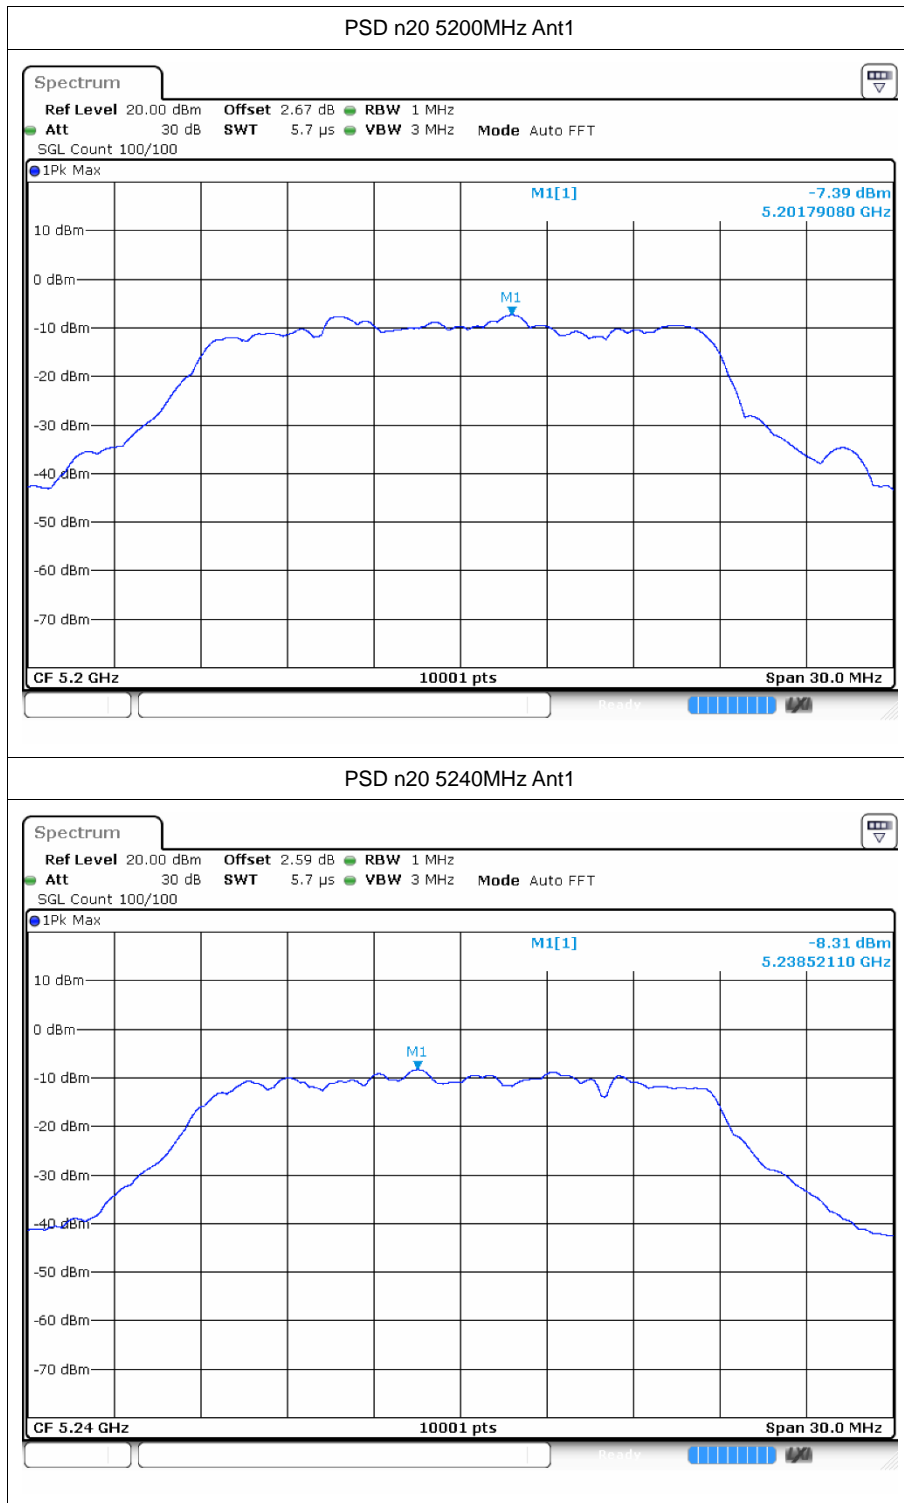


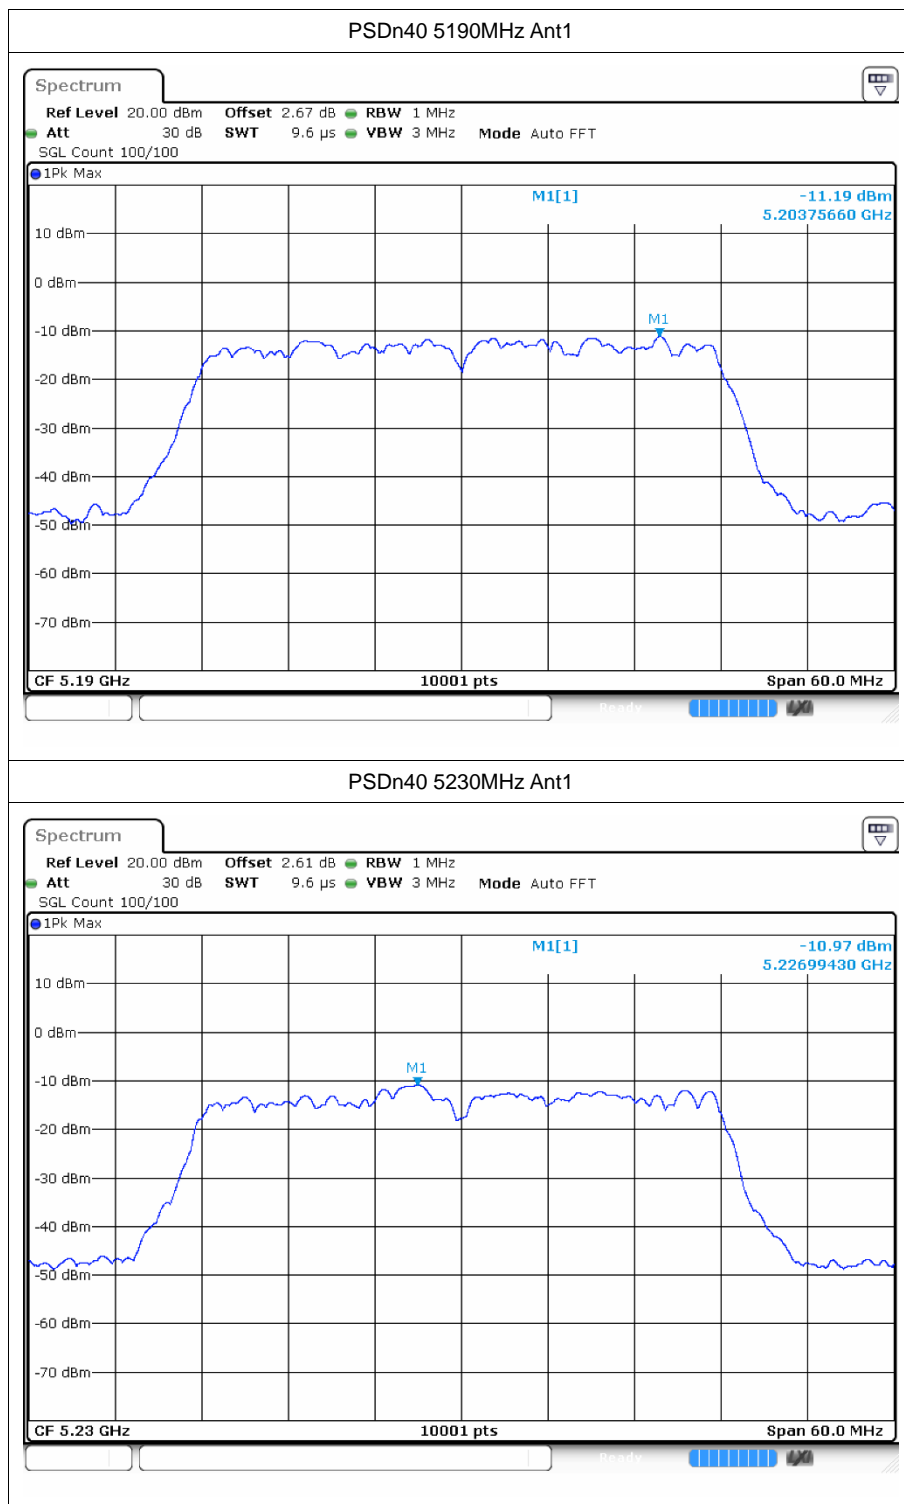



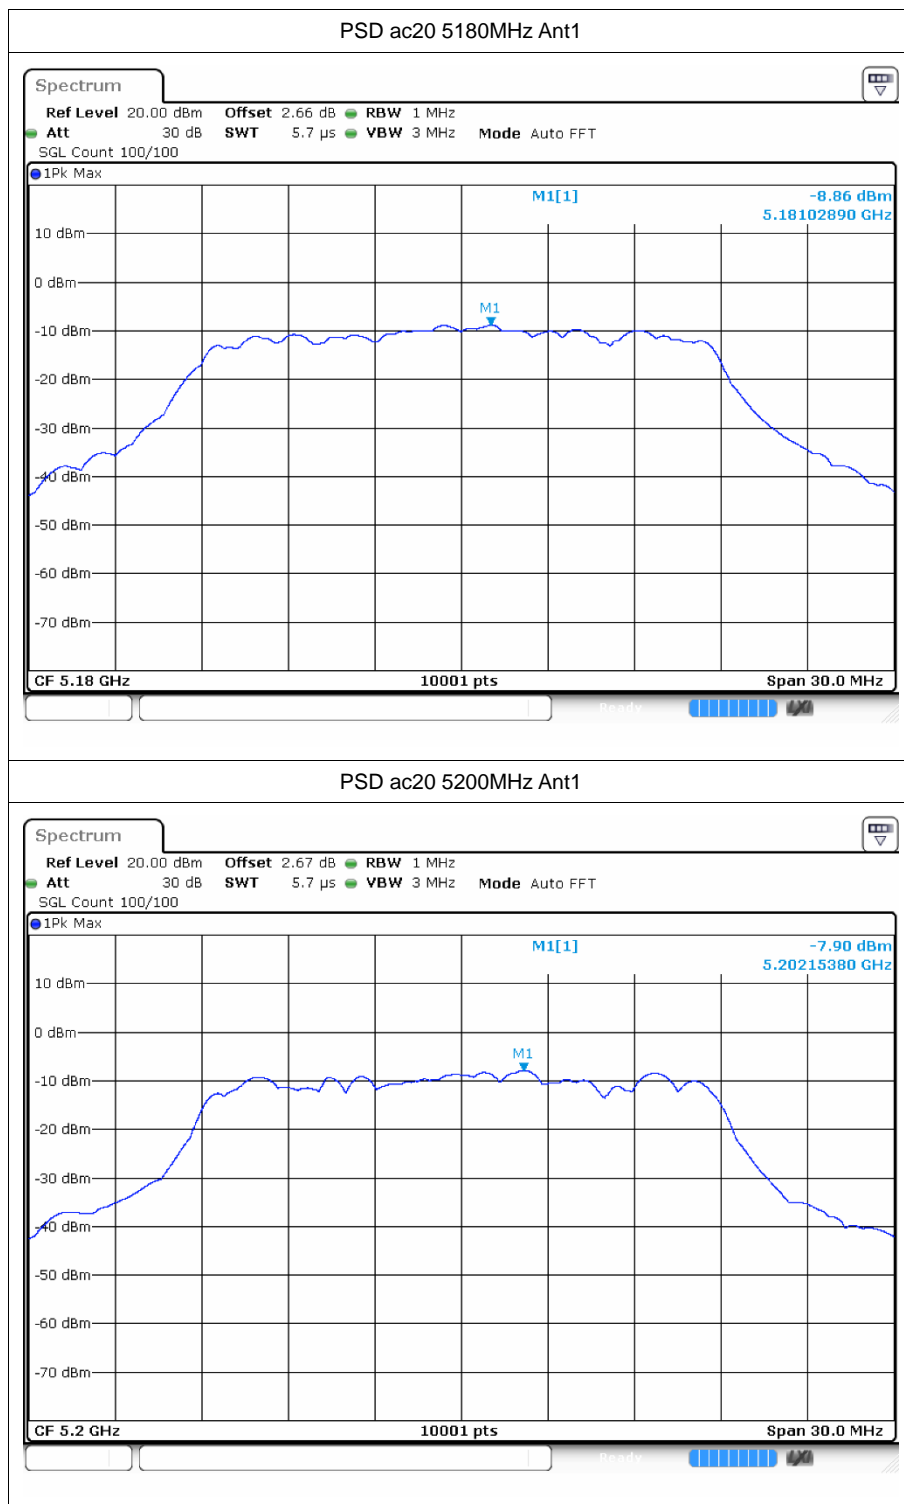

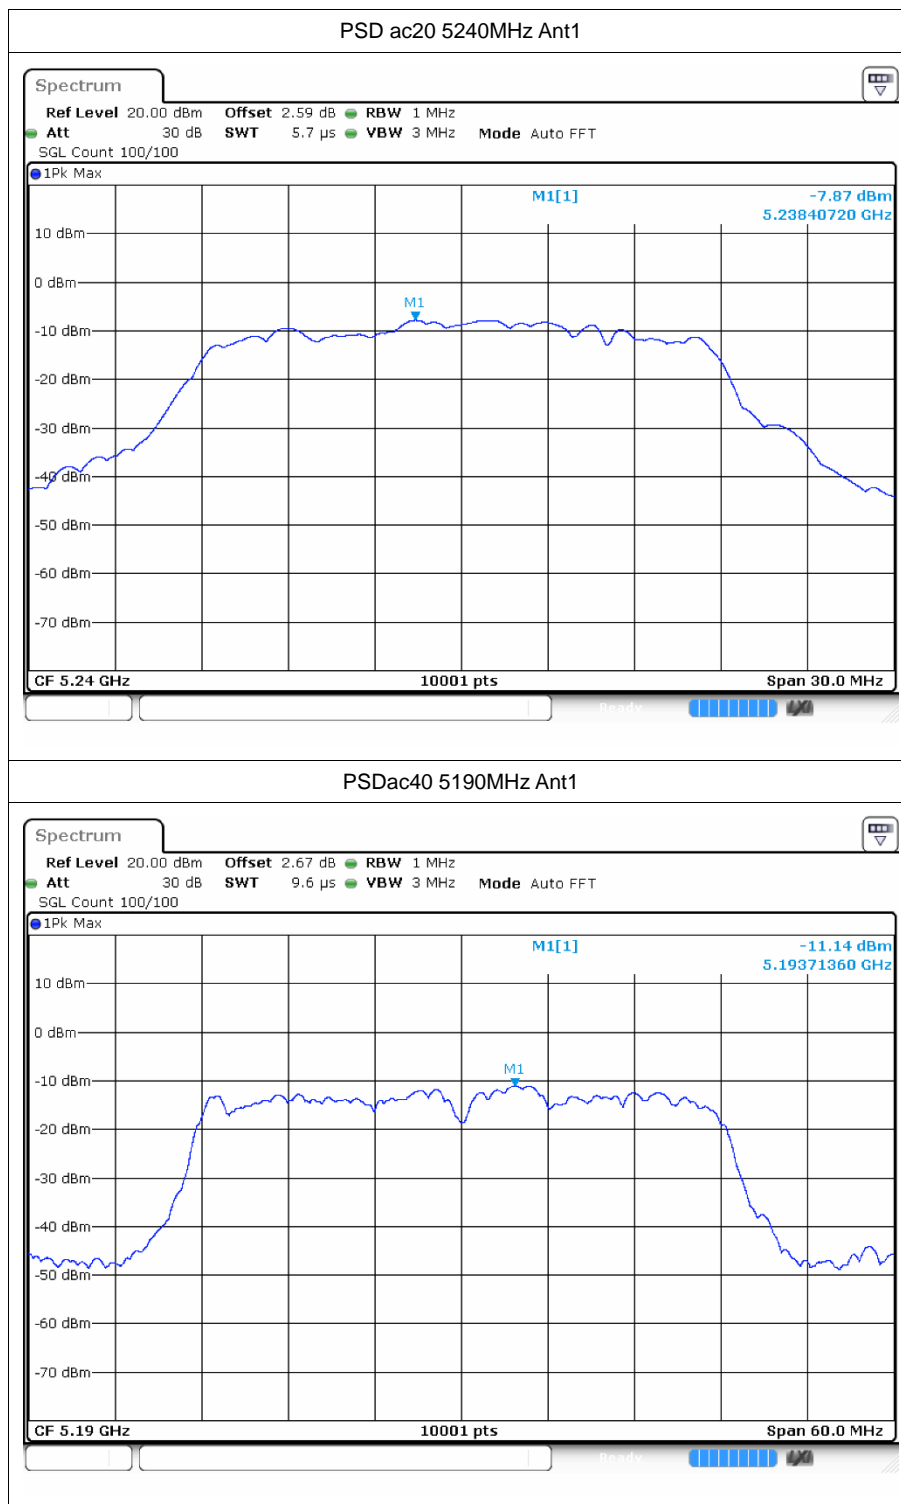

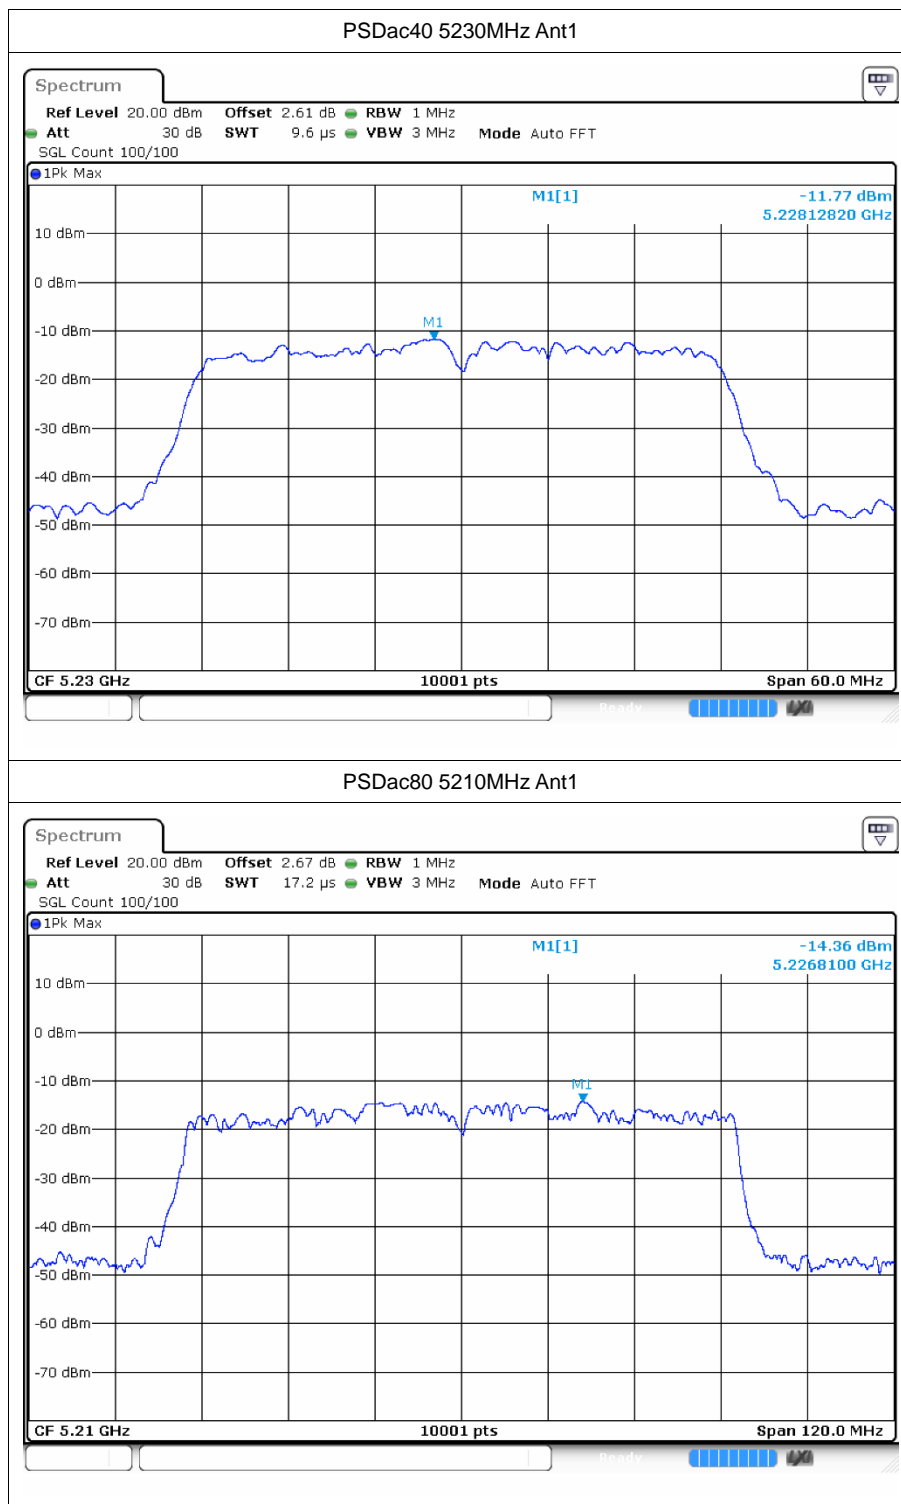



## 6 Frequency Stability

### 6.1 Test Result

Condition	Mode	Frequency (MHz)	Antenna	Measured Frequency (MHz)	Frequency Error (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
20C 102V	a	5180	Ant1	5180	0	0	25	Pass
20C 120V	a	5180	Ant1	5180	0	0	25	Pass
20C 138V	a	5180	Ant1	5179.98	-20000	-3.86	25	Pass
-20C 120V	a	5180	Ant1	5179.98	-20000	-3.86	25	Pass
-10C 120V	a	5180	Ant1	5179.96	-40000	-7.72	25	Pass
0C 120V	a	5180	Ant1	5180.02	20000	3.86	25	Pass
10C 120V	a	5180	Ant1	5179.98	-20000	-3.86	25	Pass
30C 120V	a	5180	Ant1	5180	0	0	25	Pass
40C 120V	a	5180	Ant1	5180	0	0	25	Pass
50C 120V	a	5180	Ant1	5179.98	-20000	-3.86	25	Pass
20C 102V	a	5200	Ant1	5199.96	-40000	-7.69	25	Pass
20C 120V	a	5200	Ant1	5199.98	-20000	-3.85	25	Pass
20C 138V	a	5200	Ant1	5199.98	-20000	-3.85	25	Pass
-20C 120V	a	5200	Ant1	5199.96	-40000	-7.69	25	Pass
-10C 120V	a	5200	Ant1	5199.98	-20000	-3.85	25	Pass
0C 120V	a	5200	Ant1	5199.98	-20000	-3.85	25	Pass
10C 120V	a	5200	Ant1	5199.98	-20000	-3.85	25	Pass
30C 120V	a	5200	Ant1	5200	0	0	25	Pass
40C 120V	a	5200	Ant1	5199.98	-20000	-3.85	25	Pass
20C 102V	a	5200	Ant1	5199.96	-40000	-7.69	25	Pass
20C 102V	a	5240	Ant1	5239.98	-20000	-3.82	25	Pass
20C 120V	a	5240	Ant1	5239.98	-20000	-3.82	25	Pass
20C 138V	a	5240	Ant1	5239.96	-40000	-7.63	25	Pass
-20C 120V	a	5240	Ant1	5239.96	-40000	-7.63	25	Pass
-10C 120V	a	5240	Ant1	5239.98	-20000	-3.82	25	Pass
0C 120V	a	5240	Ant1	5239.98	-20000	-3.82	25	Pass
10C 120V	a	5240	Ant1	5240	0	0	25	Pass
30C 120V	a	5240	Ant1	5239.98	-20000	-3.82	25	Pass
40C 120V	a	5240	Ant1	5239.96	-40000	-7.63	25	Pass
50C 120V	a	5240	Ant1	5240	0	0	25	Pass
20C 102V	n20	5180	Ant1	5179.98	-20000	-3.86	25	Pass
20C 120V	n20	5180	Ant1	5179.98	-20000	-3.86	25	Pass
20C 138V	n20	5180	Ant1	5180	0	0	25	Pass
-20C 120V	n20	5180	Ant1	5179.96	-40000	-7.72	25	Pass



-10C 120V	n20	5180	Ant1	5179.98	-20000	-3.86	25	Pass
0C 120V	n20	5180	Ant1	5179.96	-40000	-7.72	25	Pass
10C 120V	n20	5180	Ant1	5179.98	-20000	-3.86	25	Pass
30C 120V	n20	5180	Ant1	5179.96	-40000	-7.72	25	Pass
40C 120V	n20	5180	Ant1	5179.98	-20000	-3.86	25	Pass
50C 120V	n20	5180	Ant1	5179.98	-20000	-3.86	25	Pass
20C 102V	n20	5200	Ant1	5199.96	-40000	-7.69	25	Pass
20C 120V	n20	5200	Ant1	5199.96	-40000	-7.69	25	Pass
20C 138V	n20	5200	Ant1	5200	0	0	25	Pass
-20C 120V	n20	5200	Ant1	5199.96	-40000	-7.69	25	Pass
-10C 120V	n20	5200	Ant1	5199.96	-40000	-7.69	25	Pass
0C 120V	n20	5200	Ant1	5199.94	-60000	-11.54	25	Pass
10C 120V	n20	5200	Ant1	5199.98	-20000	-3.85	25	Pass
30C 120V	n20	5200	Ant1	5199.96	-40000	-7.69	25	Pass
40C 120V	n20	5200	Ant1	5199.96	-40000	-7.69	25	Pass
50C 120V	n20	5200	Ant1	5199.98	-20000	-3.85	25	Pass
20C 102V	n20	5240	Ant1	5239.96	-40000	-7.63	25	Pass
20C 120V	n20	5240	Ant1	5239.98	-20000	-3.82	25	Pass
20C 138V	n20	5240	Ant1	5239.98	-20000	-3.82	25	Pass
-20C 120V	n20	5240	Ant1	5239.96	-40000	-7.63	25	Pass
-10C 120V	n20	5240	Ant1	5239.98	-20000	-3.82	25	Pass
0C 120V	n20	5240	Ant1	5239.98	-20000	-3.82	25	Pass
10C 120V	n20	5240	Ant1	5239.96	-40000	-7.63	25	Pass
30C 120V	n20	5240	Ant1	5239.98	-20000	-3.82	25	Pass
40C 120V	n20	5240	Ant1	5239.96	-40000	-7.63	25	Pass
50C 120V	n20	5240	Ant1	5239.98	-20000	-3.82	25	Pass
20C 102V	n40	5190	Ant1	5189.96	-40000	-7.71	25	Pass
20C 120V	n40	5190	Ant1	5190	0	0	25	Pass
20C 138V	n40	5190	Ant1	5190	0	0	25	Pass
-20C 120V	n40	5190	Ant1	5190	0	0	25	Pass
-10C 120V	n40	5190	Ant1	5189.96	-40000	-7.71	25	Pass
0C 120V	n40	5190	Ant1	5189.96	-40000	-7.71	25	Pass
10C 120V	n40	5190	Ant1	5190	0	0	25	Pass
30C 120V	n40	5190	Ant1	5190	0	0	25	Pass
40C 120V	n40	5190	Ant1	5189.96	-40000	-7.71	25	Pass
50C 120V	n40	5190	Ant1	5189.96	-40000	-7.71	25	Pass
20C 102V	n40	5230	Ant1	5229.96	-40000	-7.65	25	Pass
20C 120V	n40	5230	Ant1	5229.92	-80000	-15.3	25	Pass
20C 138V	n40	5230	Ant1	5229.96	-40000	-7.65	25	Pass
-20C 120V	n40	5230	Ant1	5229.96	-40000	-7.65	25	Pass
-10C 120V	n40	5230	Ant1	5229.96	-40000	-7.65	25	Pass
0C 120V	n40	5230	Ant1	5229.96	-40000	-7.65	25	Pass
10C 120V	n40	5230	Ant1	5229.96	-40000	-7.65	25	Pass



30C 120V	n40	5230	Ant1	5229.96	-40000	-7.65	25	Pass
40C 120V	n40	5230	Ant1	5230	0	0	25	Pass
50C 120V	n40	5230	Ant1	5230	0	0	25	Pass
20C 102V	ac20	5180	Ant1	5179.98	-20000	-3.86	25	Pass
20C 120V	ac20	5180	Ant1	5179.96	-40000	-7.72	25	Pass
20C 138V	ac20	5180	Ant1	5179.98	-20000	-3.86	25	Pass
-20C 120V	ac20	5180	Ant1	5179.98	-20000	-3.86	25	Pass
-10C 120V	ac20	5180	Ant1	5179.98	-20000	-3.86	25	Pass
0C 120V	ac20	5180	Ant1	5180	0	0	25	Pass
10C 120V	ac20	5180	Ant1	5180	0	0	25	Pass
30C 120V	ac20	5180	Ant1	5179.96	-40000	-7.72	25	Pass
40C 120V	ac20	5180	Ant1	5179.98	-20000	-3.86	25	Pass
50C 120V	ac20	5180	Ant1	5179.98	-20000	-3.86	25	Pass
20C 102V	ac20	5200	Ant1	5199.98	-20000	-3.85	25	Pass
20C 120V	ac20	5200	Ant1	5199.98	-20000	-3.85	25	Pass
20C 138V	ac20	5200	Ant1	5200	0	0	25	Pass
-20C 120V	ac20	5200	Ant1	5200	0	0	25	Pass
-10C 120V	ac20	5200	Ant1	5200	0	0	25	Pass
0C 120V	ac20	5200	Ant1	5199.96	-40000	-7.69	25	Pass
10C 120V	ac20	5200	Ant1	5200	0	0	25	Pass
30C 120V	ac20	5200	Ant1	5199.98	-20000	-3.85	25	Pass
40C 120V	ac20	5200	Ant1	5199.98	-20000	-3.85	25	Pass
50C 120V	ac20	5200	Ant1	5199.98	-20000	-3.85	25	Pass
20C 102V	ac20	5240	Ant1	5239.98	-20000	-3.82	25	Pass
20C 120V	ac20	5240	Ant1	5240	0	0	25	Pass
20C 138V	ac20	5240	Ant1	5239.98	-20000	-3.82	25	Pass
-20C 120V	ac20	5240	Ant1	5239.96	-40000	-7.63	25	Pass
-10C 120V	ac20	5240	Ant1	5240	0	0	25	Pass
0C 120V	ac20	5240	Ant1	5239.98	-20000	-3.82	25	Pass
10C 120V	ac20	5240	Ant1	5239.98	-20000	-3.82	25	Pass
30C 120V	ac20	5240	Ant1	5239.96	-40000	-7.63	25	Pass
40C 120V	ac20	5240	Ant1	5239.98	-20000	-3.82	25	Pass
50C 120V	ac20	5240	Ant1	5239.98	-20000	-3.82	25	Pass
20C 102V	ac40	5190	Ant1	5189.96	-40000	-7.71	25	Pass
20C 120V	ac40	5190	Ant1	5189.96	-40000	-7.71	25	Pass
20C 138V	ac40	5190	Ant1	5190	0	0	25	Pass
-20C 120V	ac40	5190	Ant1	5189.96	-40000	-7.71	25	Pass
-10C 120V	ac40	5190	Ant1	5190	0	0	25	Pass
0C 120V	ac40	5190	Ant1	5189.96	-40000	-7.71	25	Pass
10C 120V	ac40	5190	Ant1	5189.96	-40000	-7.71	25	Pass
30C 120V	ac40	5190	Ant1	5189.96	-40000	-7.71	25	Pass
40C 120V	ac40	5190	Ant1	5189.96	-40000	-7.71	25	Pass
50C 120V	ac40	5190	Ant1	5189.96	-40000	-7.71	25	Pass



20C 102V	ac40	5230	Ant1	5229.96	-40000	-7.65	25	Pass
20C 120V	ac40	5230	Ant1	5229.96	-40000	-7.65	25	Pass
20C 138V	ac40	5230	Ant1	5230	0	0	25	Pass
-20C 120V	ac40	5230	Ant1	5229.96	-40000	-7.65	25	Pass
-10C 120V	ac40	5230	Ant1	5229.96	-40000	-7.65	25	Pass
0C 120V	ac40	5230	Ant1	5229.96	-40000	-7.65	25	Pass
10C 120V	ac40	5230	Ant1	5229.96	-40000	-7.65	25	Pass
30C 120V	ac40	5230	Ant1	5229.96	-40000	-7.65	25	Pass
40C 120V	ac40	5230	Ant1	5229.96	-40000	-7.65	25	Pass
50C 120V	ac40	5230	Ant1	5229.96	-40000	-7.65	25	Pass
20C 102V	ac80	5210	Ant1	5210	0	0	25	Pass
20C 120V	ac80	5210	Ant1	5210	0	0	25	Pass
20C 138V	ac80	5210	Ant1	5210	0	0	25	Pass
-20C 120V	ac80	5210	Ant1	5210	0	0	25	Pass
-10C 120V	ac80	5210	Ant1	5210	0	0	25	Pass
0C 120V	ac80	5210	Ant1	5210	0	0	25	Pass
10C 120V	ac80	5210	Ant1	5210	0	0	25	Pass
30C 120V	ac80	5210	Ant1	5210	0	0	25	Pass
40C 120V	ac80	5210	Ant1	5210	0	0	25	Pass
50C 120V	ac80	5210	Ant1	5210	0	0	25	Pass



## 7 Conducted RF Spurious Emission


### 7.1 Test Result



Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
a	5180	Ant1	-33.9	-27	Pass
a	5200	Ant1	-33.74	-27	Pass
a	5240	Ant1	-34.37	-27	Pass
n20	5180	Ant1	-33.98	-27	Pass
n20	5200	Ant1	-33.95	-27	Pass
n20	5240	Ant1	-34.59	-27	Pass
n40	5190	Ant1	-33.94	-27	Pass
n40	5230	Ant1	-33.95	-27	Pass
ac20	5180	Ant1	-33.92	-27	Pass
ac20	5200	Ant1	-33.98	-27	Pass
ac20	5240	Ant1	-34.37	-27	Pass
ac40	5190	Ant1	-33.95	-27	Pass
ac40	5230	Ant1	-33.92	-27	Pass
ac80	5210	Ant1	-32.97	-27	Pass











## 7.2 Test Graphs


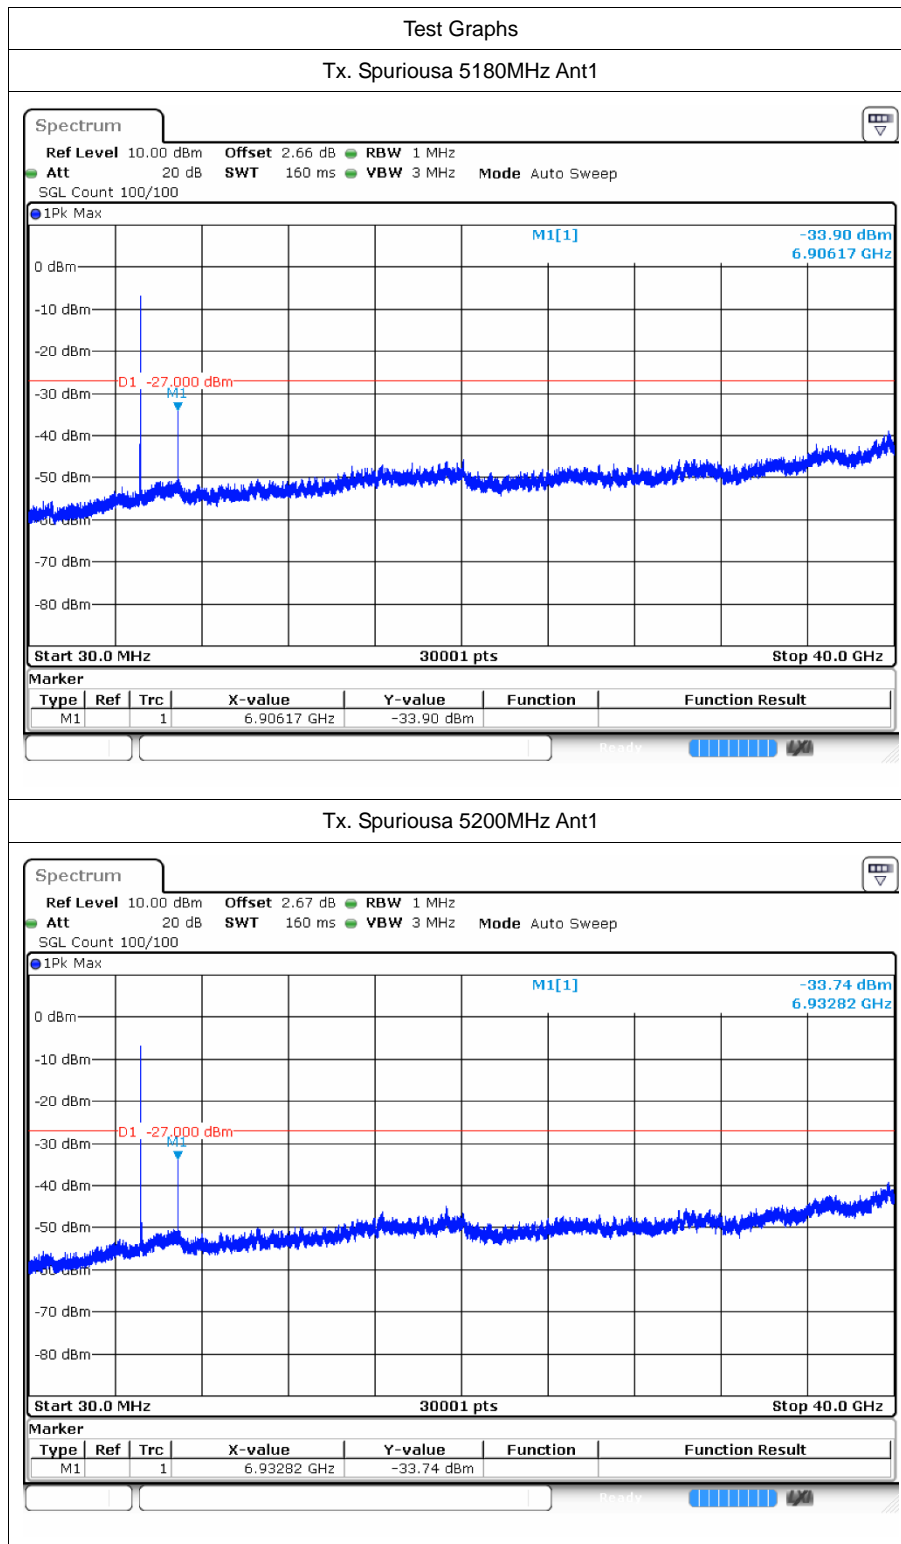


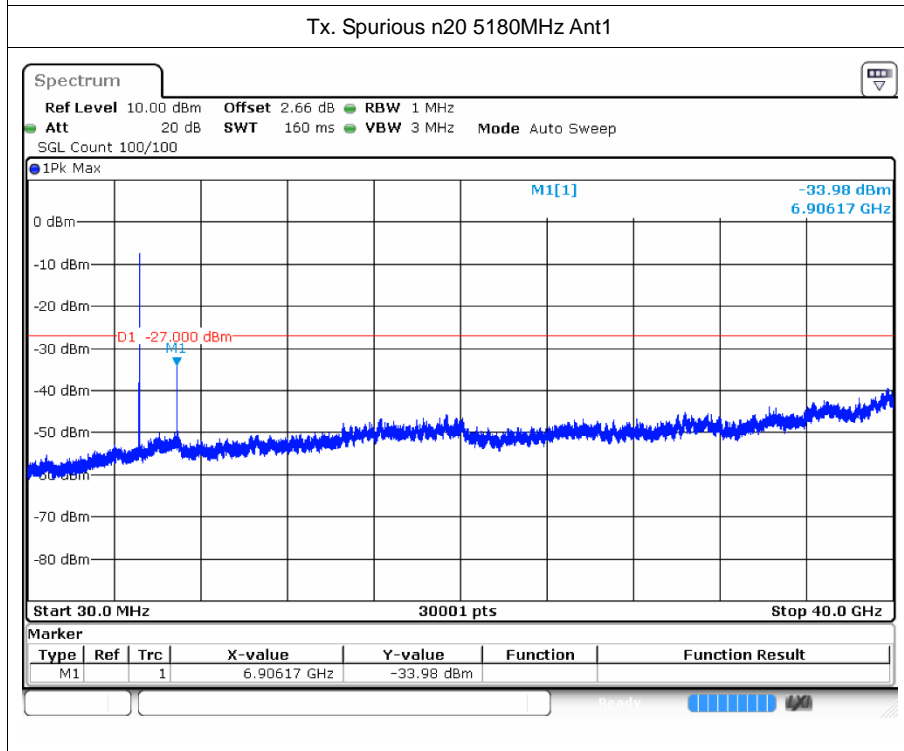
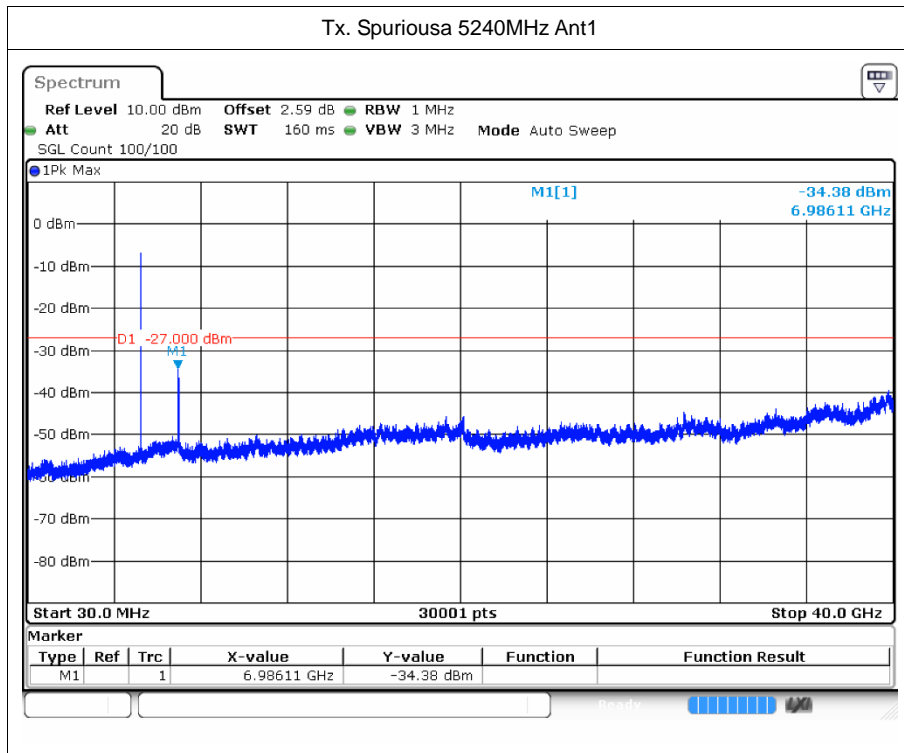


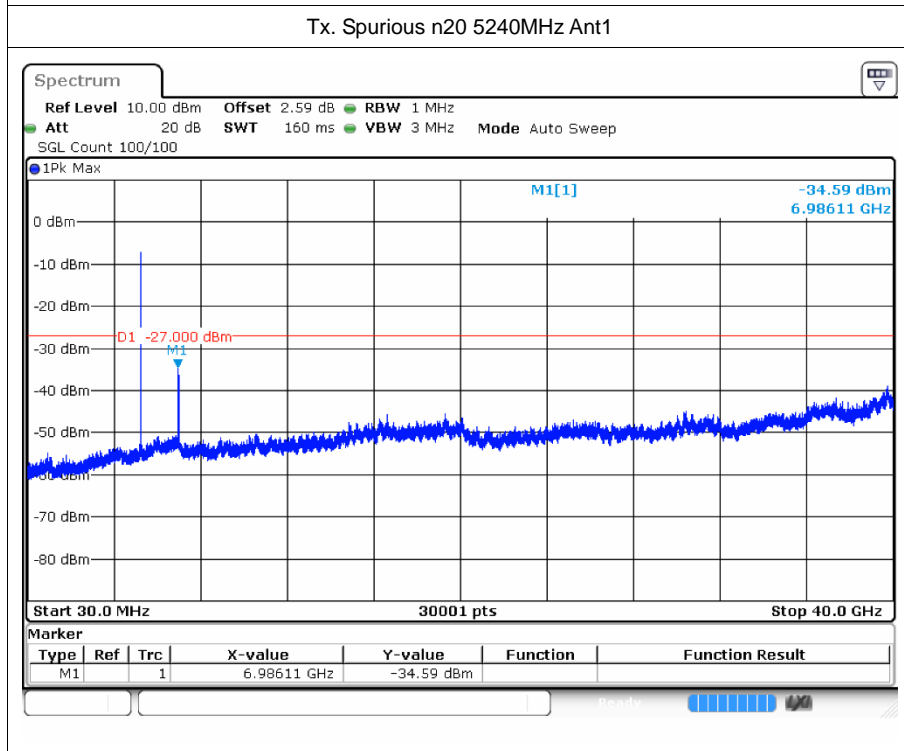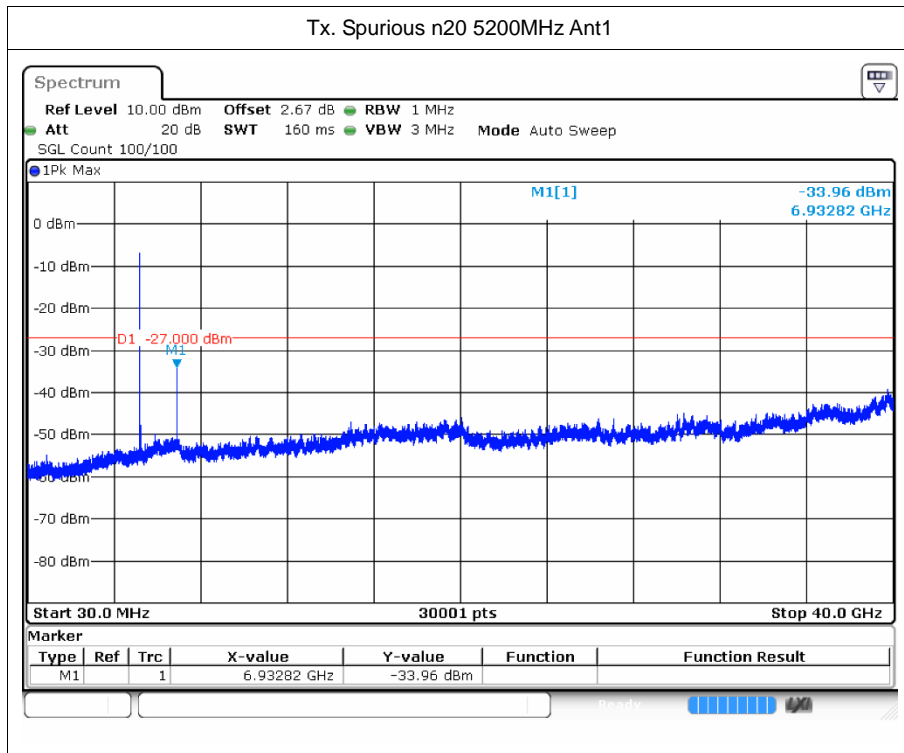

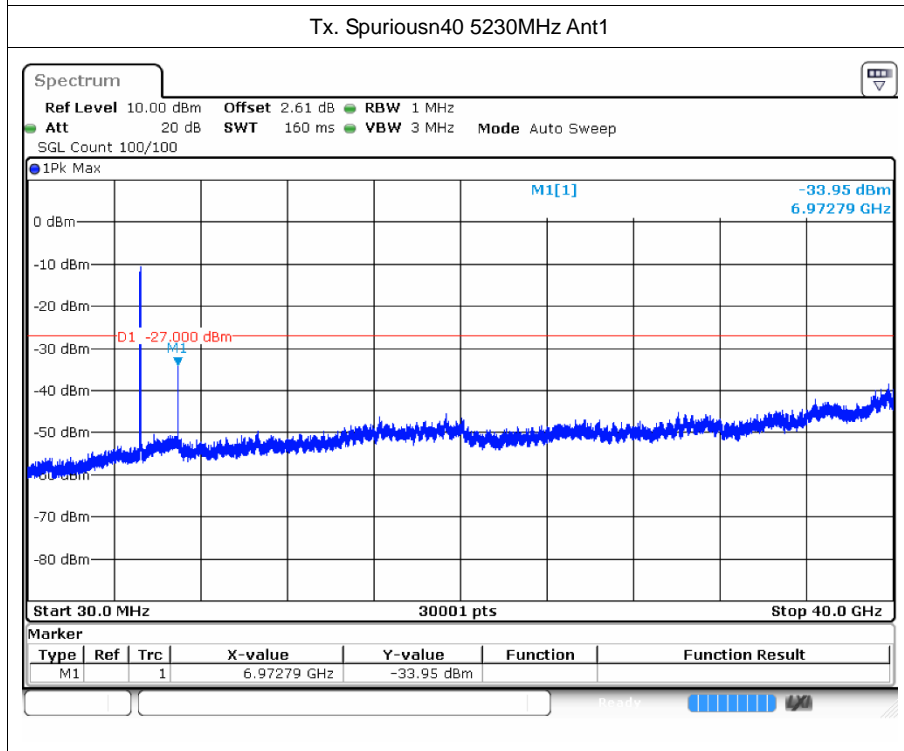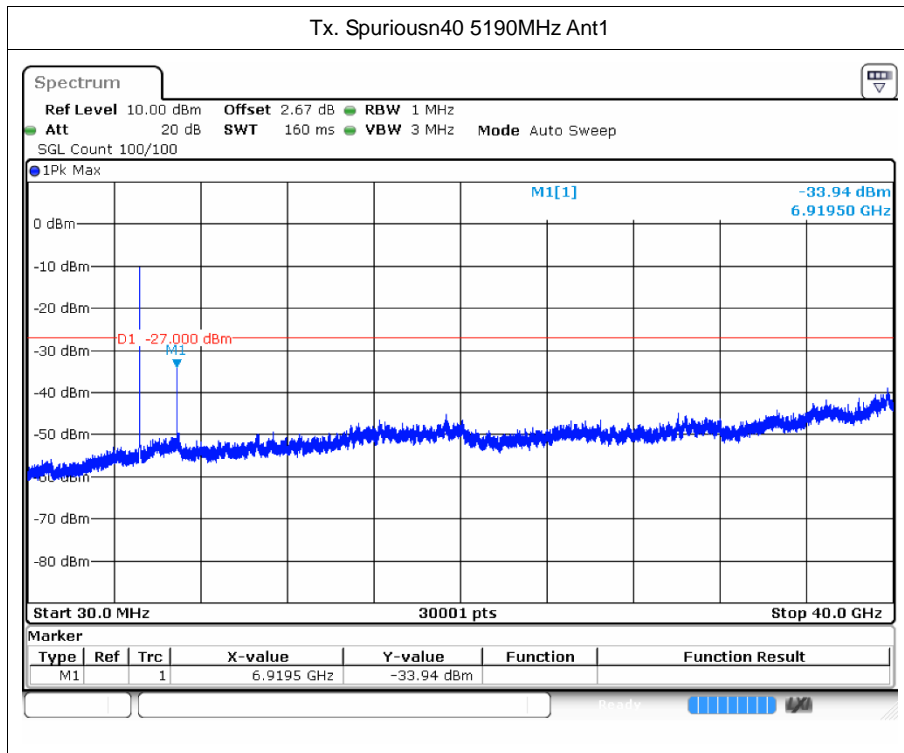

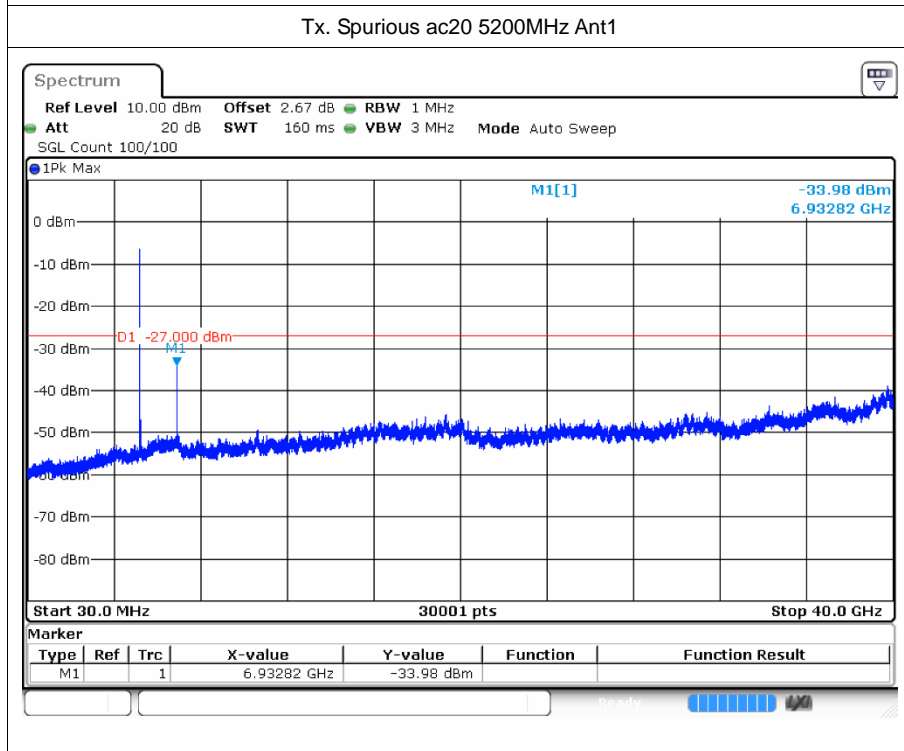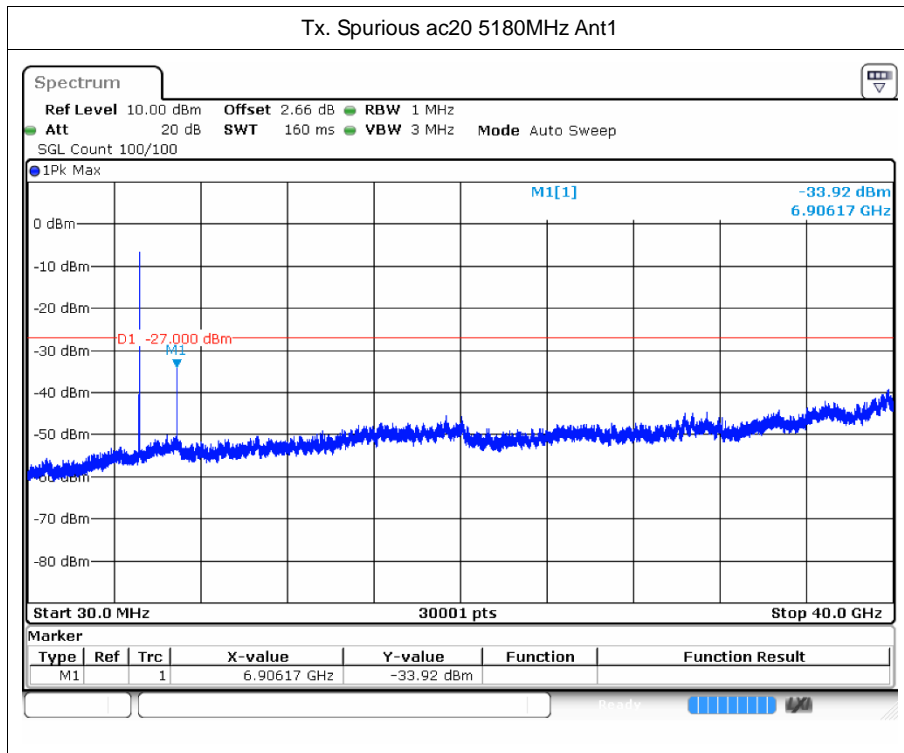

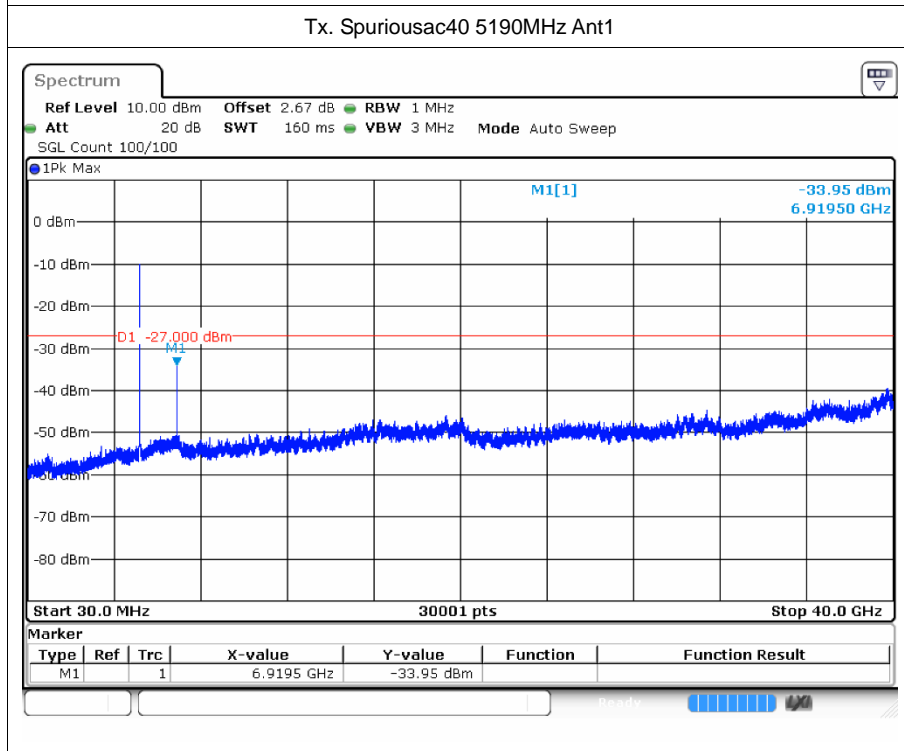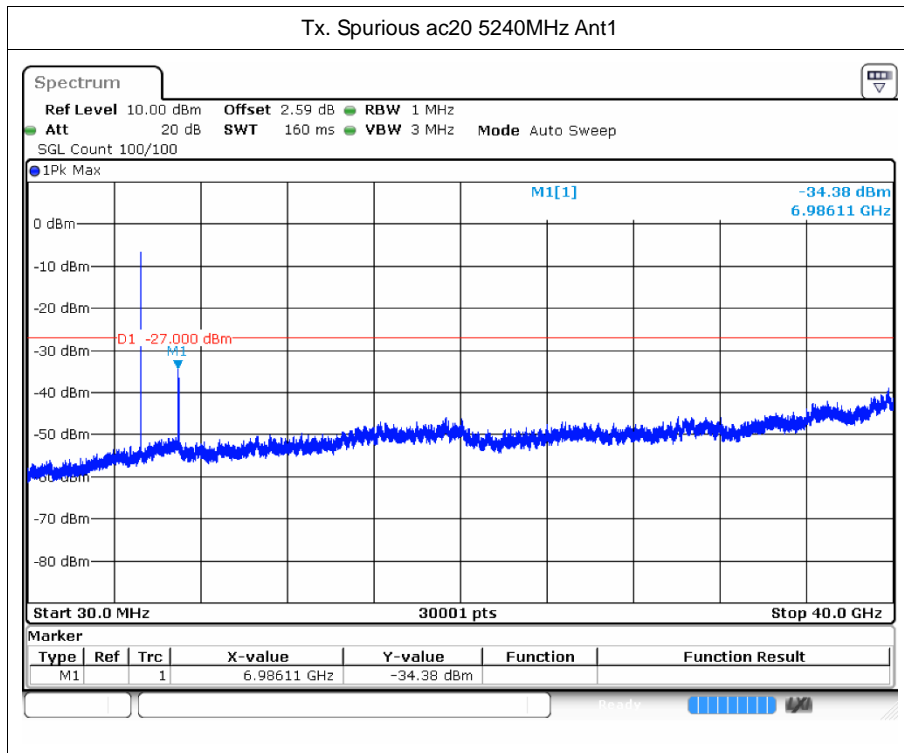

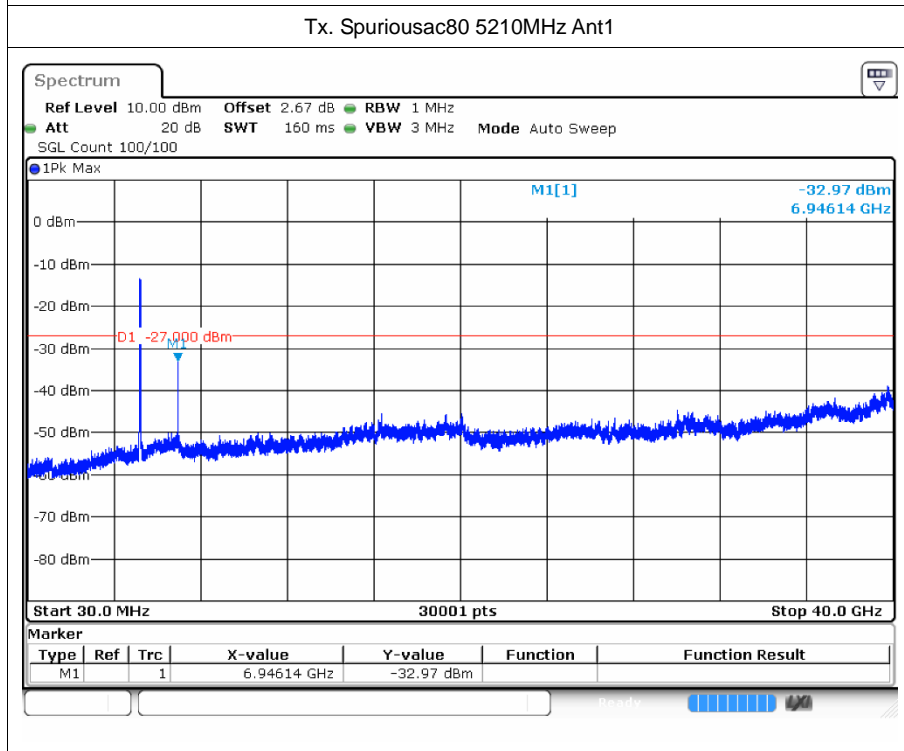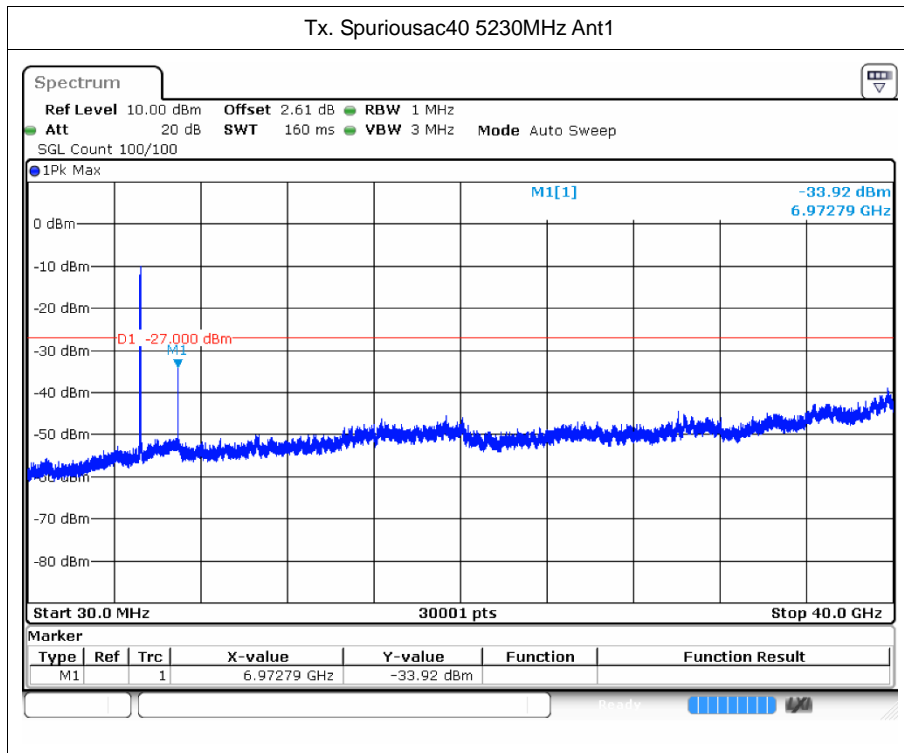



## 8 Restrict Band

### 8.1 Test Result

Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
a	5180	Ant1	4500	-46.36	2	50.87	Peak	68.2	Pass
a	5180	Ant1	4500	-56.15	2	41.08	Average	54	Pass
a	5180	Ant1	4991.4	-43.99	2	53.24	Peak	68.2	Pass
a	5180	Ant1	4963.4	-52.53	2	44.7	Average	54	Pass
a	5180	Ant1	5150	-45.2	2	52.03	Peak	68.2	Pass
a	5180	Ant1	5150	-55.5	2	41.73	Average	54	Pass
a	5240	Ant1	5350	-48.44	2	48.79	Peak	68.2	Pass
a	5240	Ant1	5350	-56.2	2	41.03	Average	54	Pass
a	5240	Ant1	5455.44	-42.92	2	54.31	Peak	68.2	Pass
a	5240	Ant1	5446.32	-53.91	2	43.32	Average	54	Pass
a	5240	Ant1	5460	-47.94	2	49.29	Peak	68.2	Pass
a	5240	Ant1	5460	-55.66	2	41.57	Average	54	Pass
n20	5180	Ant1	4500	-46.57	2	50.66	Peak	68.2	Pass
n20	5180	Ant1	4500	-56.02	2	41.21	Average	54	Pass
n20	5180	Ant1	5019.4	-43.15	2	54.08	Peak	68.2	Pass
n20	5180	Ant1	4964.1	-53.14	2	44.09	Average	54	Pass
n20	5180	Ant1	5150	-45.54	2	51.69	Peak	68.2	Pass
n20	5180	Ant1	5150	-56.06	2	41.17	Average	54	Pass
n20	5240	Ant1	5350	-50.07	2	47.16	Peak	68.2	Pass
n20	5240	Ant1	5350	-56.24	2	40.99	Average	54	Pass
n20	5240	Ant1	5448.72	-44.58	2	52.65	Peak	68.2	Pass
n20	5240	Ant1	5446.8	-53.65	2	43.58	Average	54	Pass
n20	5240	Ant1	5460	-47.66	2	49.57	Peak	68.2	Pass
n20	5240	Ant1	5460	-56.03	2	41.2	Average	54	Pass
n40	5190	Ant1	4500	-45.35	2	51.88	Peak	68.2	Pass
n40	5190	Ant1	4500	-56.27	2	40.96	Average	54	Pass
n40	5190	Ant1	4978.15	-43.5	2	53.73	Peak	68.2	Pass
n40	5190	Ant1	4964.28	-53.61	2	43.62	Average	54	Pass
n40	5190	Ant1	5150	-46.54	2	50.69	Peak	68.2	Pass
n40	5190	Ant1	5150	-56.04	2	41.19	Average	54	Pass
n40	5230	Ant1	5350	-46.85	2	50.38	Peak	68.2	Pass
n40	5230	Ant1	5350	-56.07	2	41.16	Average	54	Pass
n40	5230	Ant1	5448.12	-43.12	2	54.11	Peak	68.2	Pass
n40	5230	Ant1	5449.47	-53.91	2	43.32	Average	54	Pass





n40	5230	Ant1	5460	-45.32	2	51.91	Peak	68.2	Pass
n40	5230	Ant1	5460	-55.54	2	41.69	Average	54	Pass
ac20	5180	Ant1	4500	-45.89	2	51.34	Peak	68.2	Pass
ac20	5180	Ant1	4500	-55.58	2	41.65	Average	54	Pass
ac20	5180	Ant1	5115.3	-43.87	2	53.36	Peak	68.2	Pass
ac20	5180	Ant1	4967.6	-53.61	2	43.62	Average	54	Pass
ac20	5180	Ant1	5150	-44.81	2	52.42	Peak	68.2	Pass
ac20	5180	Ant1	5150	-55.67	2	41.56	Average	54	Pass
ac20	5240	Ant1	5350	-47.77	2	49.46	Peak	68.2	Pass
ac20	5240	Ant1	5350	-56.5	2	40.73	Average	54	Pass
ac20	5240	Ant1	5449.2	-44.7	2	52.53	Peak	68.2	Pass
ac20	5240	Ant1	5450.64	-53.72	2	43.51	Average	54	Pass
ac20	5240	Ant1	5460	-47.56	2	49.67	Peak	68.2	Pass
ac20	5240	Ant1	5460	-55.57	2	41.66	Average	54	Pass
ac40	5190	Ant1	4500	-46.73	2	50.5	Peak	68.2	Pass
ac40	5190	Ant1	4500	-56.34	2	40.89	Average	54	Pass
ac40	5190	Ant1	4976.69	-42.63	2	54.6	Peak	68.2	Pass
ac40	5190	Ant1	4965.01	-53.62	2	43.61	Average	54	Pass
ac40	5190	Ant1	5150	-46.76	2	50.47	Peak	68.2	Pass
ac40	5190	Ant1	5150	-56.09	2	41.14	Average	54	Pass
ac40	5230	Ant1	5350	-47.73	2	49.5	Peak	68.2	Pass
ac40	5230	Ant1	5350	-56.16	2	41.07	Average	54	Pass
ac40	5230	Ant1	5408.43	-44.22	2	53.01	Peak	68.2	Pass
ac40	5230	Ant1	5448.39	-54.03	2	43.2	Average	54	Pass
ac40	5230	Ant1	5460	-46.58	2	50.65	Peak	68.2	Pass
ac40	5230	Ant1	5460	-55.68	2	41.55	Average	54	Pass
ac80	5210	Ant1	4500	-46.77	2	50.46	Peak	68.2	Pass
ac80	5210	Ant1	4500	-55.91	2	41.32	Average	54	Pass
ac80	5210	Ant1	4646.15	-43.76	2	53.47	Peak	68.2	Pass
ac80	5210	Ant1	4966.89	-53.12	2	44.11	Average	54	Pass
ac80	5210	Ant1	5150	-47.38	2	49.85	Peak	68.2	Pass
ac80	5210	Ant1	5150	-55.82	2	41.41	Average	54	Pass

## 8.2 Test Graphs

