



FCC TEST REPORT

**Test report
On Behalf of
ONYX INTERNATIONAL INC.
For
E-reader
Model No.: Max3, Max3 Pro, Max3 Plus, Max3 Lite, Monitor,
Monitor Plus, Monitor Pro, Musician, e-Music, e-Score, Max3+**

FCC ID: XR3-MAX3

Prepared for : ONYX INTERNATIONAL INC.
ROOM C301, BUILDING 2, #21 HEJING SOUTH ROAD, LIWAN DISTRICT,
GUANGZHOU, China

Prepared By : Shenzhen HUAKE Testing Technology Co., Ltd.
1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai Street,
Bao'an District, Shenzhen City, China

Date of Test: Aug. 20, 2019 ~Aug. 26, 2019

Date of Report: Aug. 26, 2019

Report Number: HK1908272116-2E



TABLE OF CONTENTS

1. Test Result Summary	4
1.1. TEST PROCEDURES AND RESULTS.....	4
1.2. TEST FACILITY	4
1.3. MEASUREMENT UNCERTAINTY	5
2. EUT Description	6
2.1. GENERAL DESCRIPTION OF EUT	6
2.2. OPERATION FREQUENCY EACH OF CHANNEL.....	7
2.3. OPERATION OF EUT DURING TESTING	7
2.4. DESCRIPTION OF TEST SETUP	8
3. Genera Information	9
3.1. TEST ENVIRONMENT AND MODE	9
3.2. DESCRIPTION OF SUPPORT UNITS	10
4. Test Results and Measurement Data	11
4.1. CONDUCTED EMISSION	11
4.2. MAXIMUM CONDUCTED OUTPUT POWER	15
4.3. 6dB EMISSION BANDWIDTH	19
4.4. 26dB BANDWIDTH AND 99% OCCUPIED BANDWIDTH.....	28
4.5. POWER SPECTRAL DENSITY	37
4.6. BAND EDGE.....	54
4.7. SPURIOUS EMISSION	81
4.8. FREQUENCY STABILITY MEASUREMENT.....	91
4.9. ANTENNA REQUIREMENT	95
4.10. PHOTOGRAPHS OF TEST SETUP	96



1. Test Result Summary

1.1. TEST PROCEDURES AND RESULTS

Requirement	CFR 47 Section	Result
Antenna requirement	§15.203	PASS
AC Power Line Conducted Emission	§15.207	PASS
Maximum Conducted Output Power	§15.407(a) §2.1046	PASS
6dB Emission Bandwidth	§15.407(e)	PASS
26dB Emission Bandwidth & 99% Occupied Bandwidth	§15.407(a) §2.1049	PASS
Power Spectral Density	§15.407(a)	PASS
Band edge	§15.407(a)	PASS
Radiated Emission	§15.407(a) §2.1053	PASS
Frequency Stability	§15.407(g) §2.1055	PASS

Note:

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.

1.2. TEST FACILITY

Test Firm : Shenzhen HUAKE Testing Technology Co., Ltd.

Address : 1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai Street, Bao'an District, Shenzhen City, China



1.3. Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	MU
1	Conducted Emission	$\pm 2.56\text{dB}$
2	RF power, conducted	$\pm 0.12\text{dB}$
3	Spurious emissions, conducted	$\pm 0.11\text{dB}$
4	All emissions, radiated(<1G)	$\pm 3.92\text{dB}$
5	All emissions, radiated(>1G)	$\pm 4.28\text{dB}$
6	Temperature	$\pm 0.1^\circ\text{C}$
7	Humidity	$\pm 1.0\%$



2. EUT Description

2.1. GENERAL DESCRIPTION OF EUT

Equipment	E-reader
Model Name	Max3
Serial No.	Max3 Pro, Max3 Plus, Max3 Lite, Monitor, Monitor Plus, Monitor Pro, Musician, e-Music, e-Score, Max3+
Trade Mark	BOOX
Model Difference	All model's the function, software and electric circuit are the same, only with a product color and model named different. Test sample model: Max3.
FCC ID	XR3-MAX3
Operation Frequency:	IEEE 802.11a/n/ac(HT20) 5.180GHz-5.240GHz IEEE 802.11n/ac(HT40) 5.190GHz-5.230GHz IEEE 802.11ac(HT80) 5.210GHz IEEE 802.11a/n/ac(HT20)5.745GHz-5.825GHz IEEE 802.11n/ac(HT40)5.755GHz-5.795GHz IEEE 802.11ac(HT80) 5.775GHz
Modulation Technology:	IEEE 802.11a/n/ac
Modulation Type	CCK/OFDM/DBPSK/DAPSK
Antenna Type	Internal Antenna
Antenna Gain	2dBi
Power Source	DC3.8V from battery or DC5V/9V/12V from adapter With AC100-240V, 50/60Hz, 0.8A Max.
Power Supply:	DC3.8V from battery or DC5V/9V/12V from adapter With AC100-240V, 50/60Hz, 0.8A Max.



2.2. Operation Frequency each of channel

802.11a/802.11n(HT20) 802.11ac(HT20)		802.11n(HT40)/ 802.11ac(HT40)		802.11ac(HT80)	
Channel	Frequency	Channel	Frequency	Channel	Frequency
36	5180	38	5190	42	5210
40	5200	46	5230	155	5775
44	5220	151	5755		
48	5240	159	5790		
149	5745				
153	5765				
157	5785				
161	5805				
165	5825				

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

2.3. Operation of EUT during testing

For 802.11a/n (HT20)/ac(HT20)

Band I (5150 - 5250 MHz)			Band IV (5725 - 5850 MHz)		
Channel Number	Channel	Frequency (MHz)	Channel Number	Channel	Frequency (MHz)
36	Low	5180	149	Low	5745
40	Mid	5200	157	Mid	5785
48	High	5240	165	High	5825

For 802.11n (HT40)/ ac(HT40)

Band I (5150 - 5250 MHz)			Band IV (5725 - 5850 MHz)		
Channel Number	Channel	Frequency (MHz)	Channel Number	Channel	Frequency (MHz)
38	Low	5190	151	Low	5755
46	High	5230	159	High	5795




For 802.11ac(HT80)


Band I (5150 - 5250 MHz)		Band IV (5725 - 5850 MHz)	
Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)
42	5210	155	5775

2.4. DESCRIPTION OF TEST SETUP

Operation of EUT during conducted and Radiation testing:



Operation of EUT Above 1GHz Radiation testing:



- Adapter information
Model: FC67U
Input: 100-240V~, 50/60Hz, 0.8A Max.
Output: 5V-3A, 9V-2.66A, 12V-2A

The sample was placed (0.8m below 1GHz, 1.5m above 1GHz) above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages. The worst case is X&Z position



3. Genera Information

3.1. Test environment and mode

Operating Environment:	
Temperature:	25.0 °C
Humidity:	56 % RH
Atmospheric Pressure:	1010 mbar
Test Mode:	
Engineering mode:	Keep the EUT in continuous transmitting by select channel and modulations(The value of duty cycle is 100%)
<p>The sample was placed 0.8m/1.5m for blow/above 1GHz above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.</p>	

<p>We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:</p>	
Per-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.	
Mode	Data rate
802.11a	6 Mbps
802.11n(HT20)	MCS0
802.11n(HT40)	MCS0
802.11ac(HT20)/ac(HT40)/ac(HT80)	/
Final Test Mode:	
Operation mode:	Keep the EUT in continuous transmitting with modulation



3.2. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment	Model No.	Serial No.	FCC ID	Trade Name
/	/	/	/	/

Note:

- 1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.*
- 2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.*
- 3. For conducted measurements (Output Power, Emission Bandwidth, Power Spectral Density, Spurious Emissions), the antenna of EUT is connected to the test equipment via temporary antenna connector, the antenna connector is soldered on the antenna port of EUT, and the temporary antenna connector is listed in the Test Instruments.*



4. Test Results and Measurement Data

4.1. Conducted Emission

4.1.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.207														
Test Method:	ANSI C63.10:2013														
Frequency Range:	150 kHz to 30 MHz														
Receiver setup:	RBW=9 kHz, VBW=30 kHz, Sweep time=auto														
Limits:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													
Test Setup:	<p><i>Remark:</i> E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p>														
Test Mode:	Tx Mode														
Test Procedure:	<ol style="list-style-type: none"> 1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement. 														
Test Result:	PASS														



4.1.2. Test Instruments

Conducted Emission Shielding Room Test Site (843)				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Receiver	R&S	ESCI 7	HKE-010	Dec. 27, 2019
LISN	R&S	ENV216	HKE-002	Dec. 27, 2019
Coax cable (9KHz-30MHz)	Times	381806-002	N/A	Dec. 27, 2019
Conducted test software	Tonscend	TS+ Rev 2.5.0.0	HKE-081	N/A


Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).



4.1.3. Test data

All the test modes completed for test. only the worst result of AC 240V/60Hz (802.11a at 5180MHz) was reported

Conducted Emission on Line Terminal of the power line (150 kHz to 30MHz)

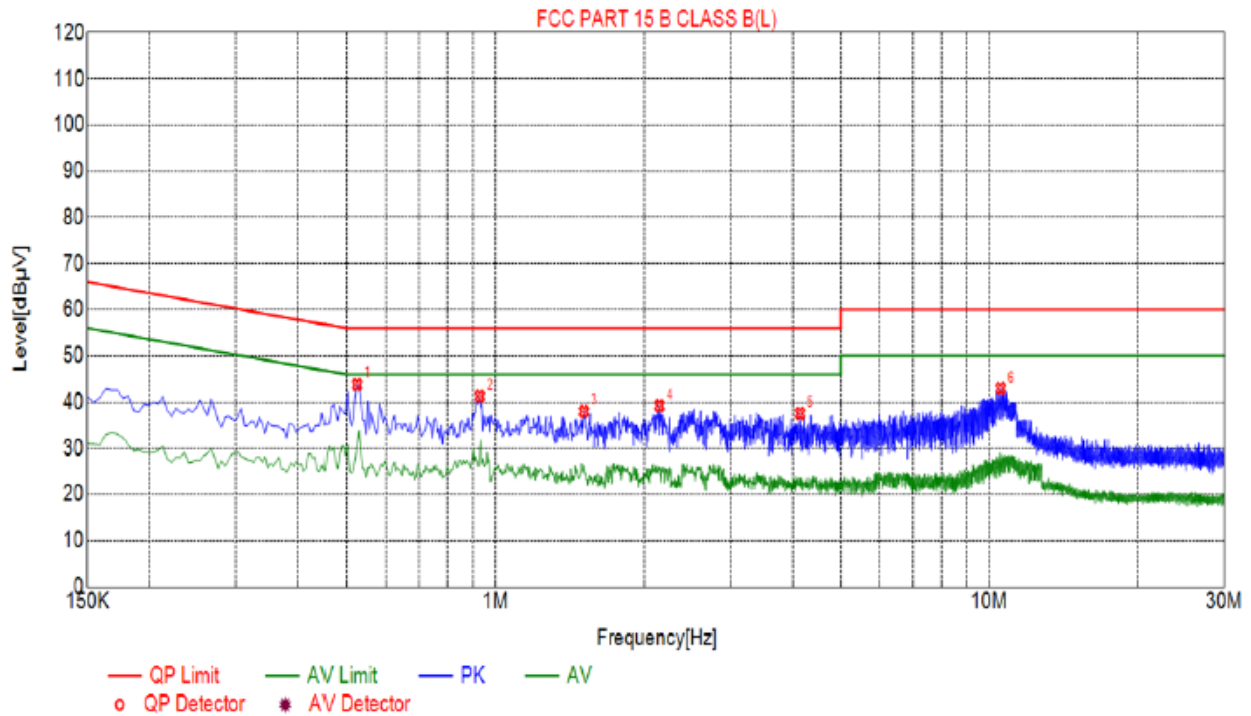


Suspected List						
NO.	Freq. [MHz]	Level [dBµV]	Factor [dB]	Limit [dBµV]	Margin [dB]	Detector
1	0.5235	43.82	10.04	56.00	12.18	PK
2	0.9285	41.29	10.06	56.00	14.71	PK
3	1.5090	37.99	10.11	56.00	18.01	PK
4	2.1480	39.23	10.16	56.00	16.77	PK
5	4.1370	37.58	10.25	56.00	18.42	PK
6	10.5495	43.00	10.04	60.00	17.00	PK

Remark: Margin = Limit – Level
 Correction factor = Cable lose + LISN insertion loss
 Level=Test receiver reading + correction factor



Conducted Emission on Neutral Terminal of the power line (150 kHz to 30MHz)

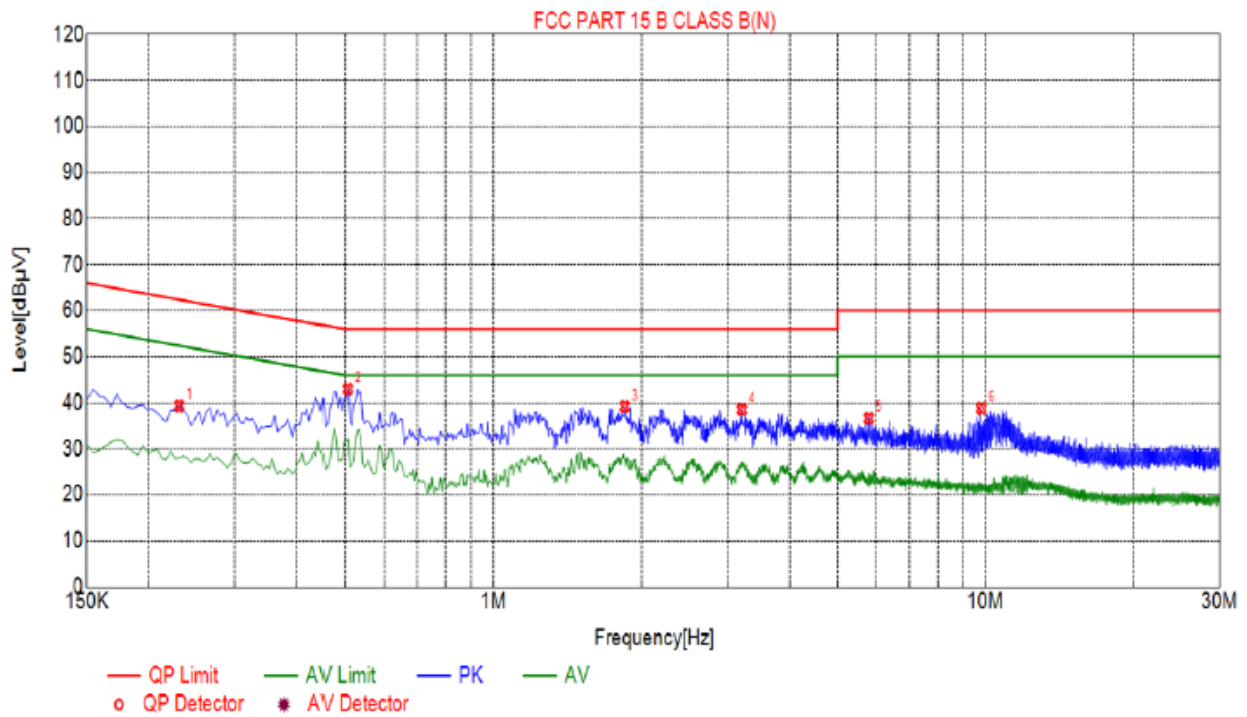

Suspected List						
NO.	Freq. [MHz]	Level [dBµV]	Factor [dB]	Limit [dBµV]	Margin [dB]	Detector
1	0.2310	39.35	10.03	62.41	23.06	PK
2	0.5055	43.02	10.04	56.00	12.98	PK
3	1.8465	39.22	10.14	56.00	16.78	PK
4	3.2010	38.54	10.23	56.00	17.46	PK
5	5.8020	36.66	10.24	60.00	23.34	PK
6	9.8160	38.80	10.07	60.00	21.20	PK

Remark: Margin = Limit – Level
 Correction factor = Cable lose + LISN insertion loss
 Level=Test receiver reading + correction factor



4.2.2. Test Instruments

RF Test Room				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 27, 2019
Power meter	Agilent	E4419B	HKE-085	Dec. 27, 2019
Power Sensor	Agilent	E9300A	HKE-086	Dec. 27, 2019
RF cable	Times	1-40G	HKE-034	Dec. 27, 2019
RF automatic control unit	Tonscend	JS0806-2	HKE-060	Dec. 27, 2019

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).



4.2.3. Test Data

Configuration Band I (5150 - 5250 MHz)				
Mode	Test channel	Maximum Conducted Output Power (dBm)	FCC Limit (dBm)	Result
11a	CH36	7.86	23.97	PASS
11a	CH40	7.79	23.97	PASS
11a	CH48	7.62	23.97	PASS
11n(HT20)	CH36	7.73	23.97	PASS
11n(HT20)	CH40	7.51	23.97	PASS
11n(HT20)	CH48	7.62	23.97	PASS
11n(HT40)	CH38	7.54	23.97	PASS
11n(HT40)	CH46	7.33	23.97	PASS
11ac(HT20)	CH36	7.84	23.97	PASS
11ac(HT20)	CH40	7.76	23.97	PASS
11ac(HT20)	CH48	7.89	23.97	PASS
11ac(HT40)	CH38	7.22	23.97	PASS
11ac(HT40)	CH46	7.16	23.97	PASS
11ac(HT80)	CH42	6.41	23.97	PASS




Configuration Band IV (5725 - 5850 MHz)				
Mode	Test channel	Maximum Conducted Output Power (dBm)	FCC Limit (dBm)	Result
11a	CH149	7.48	30	PASS
11a	CH157	7.37	30	PASS
11a	CH165	7.76	30	PASS
11n (HT20)	CH149	7.43	30	PASS
11n (HT20)	CH157	7.26	30	PASS
11n (HT20)	CH165	7.75	30	PASS
11n (HT40)	CH151	7.11	30	PASS
11n (HT40)	CH159	7.17	30	PASS
11ac(HT20)	CH149	7.73	30	PASS
11ac(HT20)	CH157	7.69	30	PASS
11ac(HT20)	CH165	7.35	30	PASS
11ac(HT40)	CH151	7.16	30	PASS
11ac(HT40)	CH159	7.22	30	PASS
11ac(HT80)	CH155	6.53	30	PASS



4.3. 6dB Emission Bandwidth

4.3.1. Test Specification

Test Requirement:	FCC CFR47 Part 15 Section 15.407(e)& Part 2 J Section 2.1049
Test Method:	KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section C
Limit:	>500kHz
Test Setup:	 <p style="text-align: center;">Spectrum Analyzer EUT</p>
Test Mode:	Transmitting mode with modulation
Test Procedure:	<ol style="list-style-type: none"> 1. KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section C 2. Set to the maximum power setting and enable the EUT transmit continuously. 3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz. 4. Measure and record the results in the test report.
Test Result:	PASS

4.3.2. Test Instruments

RF Test Room				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 27, 2019
RF cable	Times	1-40G	HKE-034	Dec. 27, 2019
RF automatic control unit	Tonscend	JS0806-2	HKE-060	Dec. 27, 2019

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).



4.3.3. Test data


Band IV (5725 - 5850 MHz)					
Mode	Test channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limit (MHz)	Result
11a	CH149	5745	16.45	0.5	PASS
11a	CH157	5785	16.43	0.5	PASS
11a	CH161	5825	16.51	0.5	PASS
11n(HT20)	CH149	5745	17.64	0.5	PASS
11n(HT20)	CH157	5785	17.64	0.5	PASS
11n(HT20)	CH161	5825	17.63	0.5	PASS
11n(HT40)	CH151	5755	35.24	0.5	PASS
11n(HT40)	CH159	5795	35.25	0.5	PASS
11ac(HT20)	CH149	5745	17.66	0.5	PASS
11ac(HT20)	CH157	5785	17.64	0.5	PASS
11ac(HT20)	CH165	5825	17.63	0.5	PASS
11ac(HT40)	CH151	5755	35.21	0.5	PASS
11ac(HT40)	CH159	5795	35.25	0.5	PASS
11ac(HT80)	CH155	5755	75.18	0.5	PASS

Test plots as follows:




Band IV (5725 – 5850 MHz)



802.11a

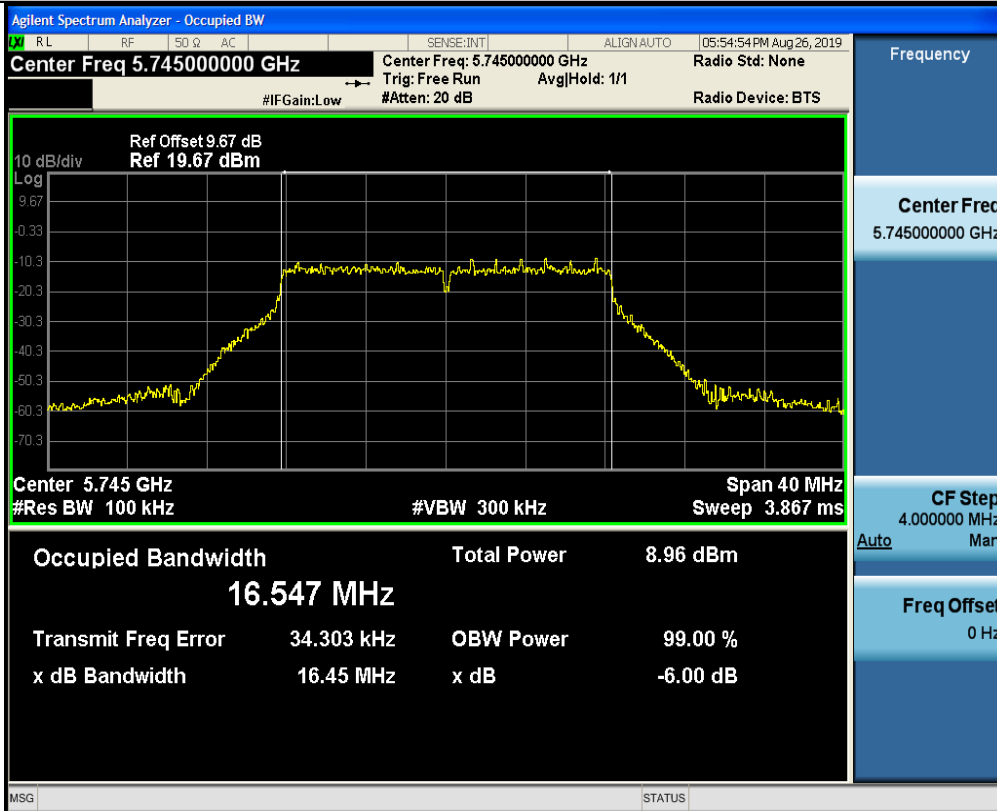


Low

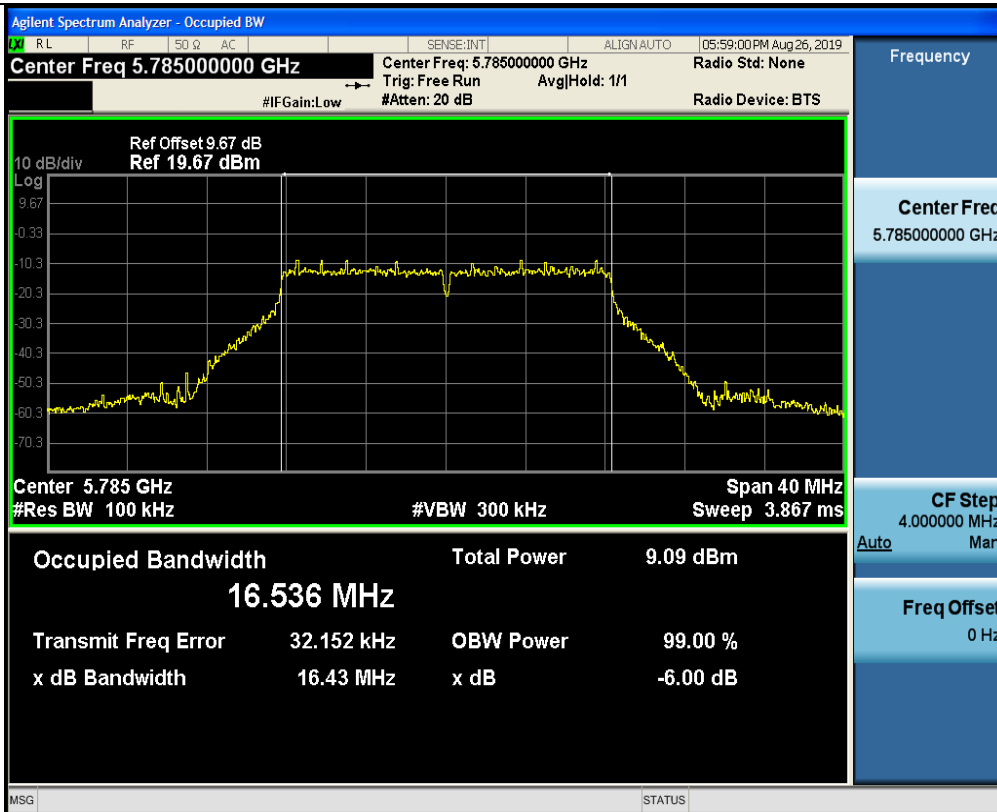


Mid

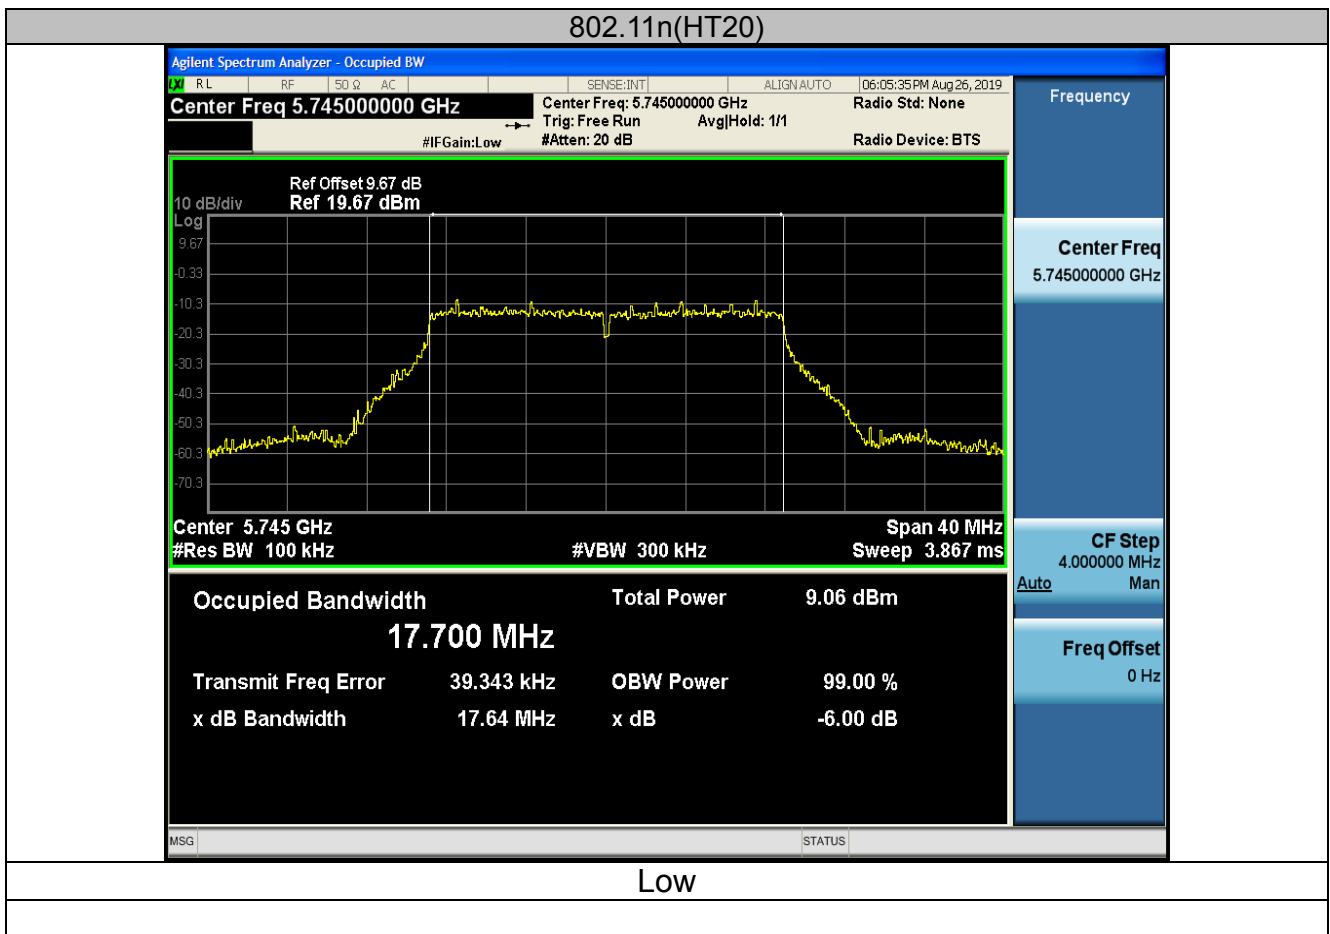
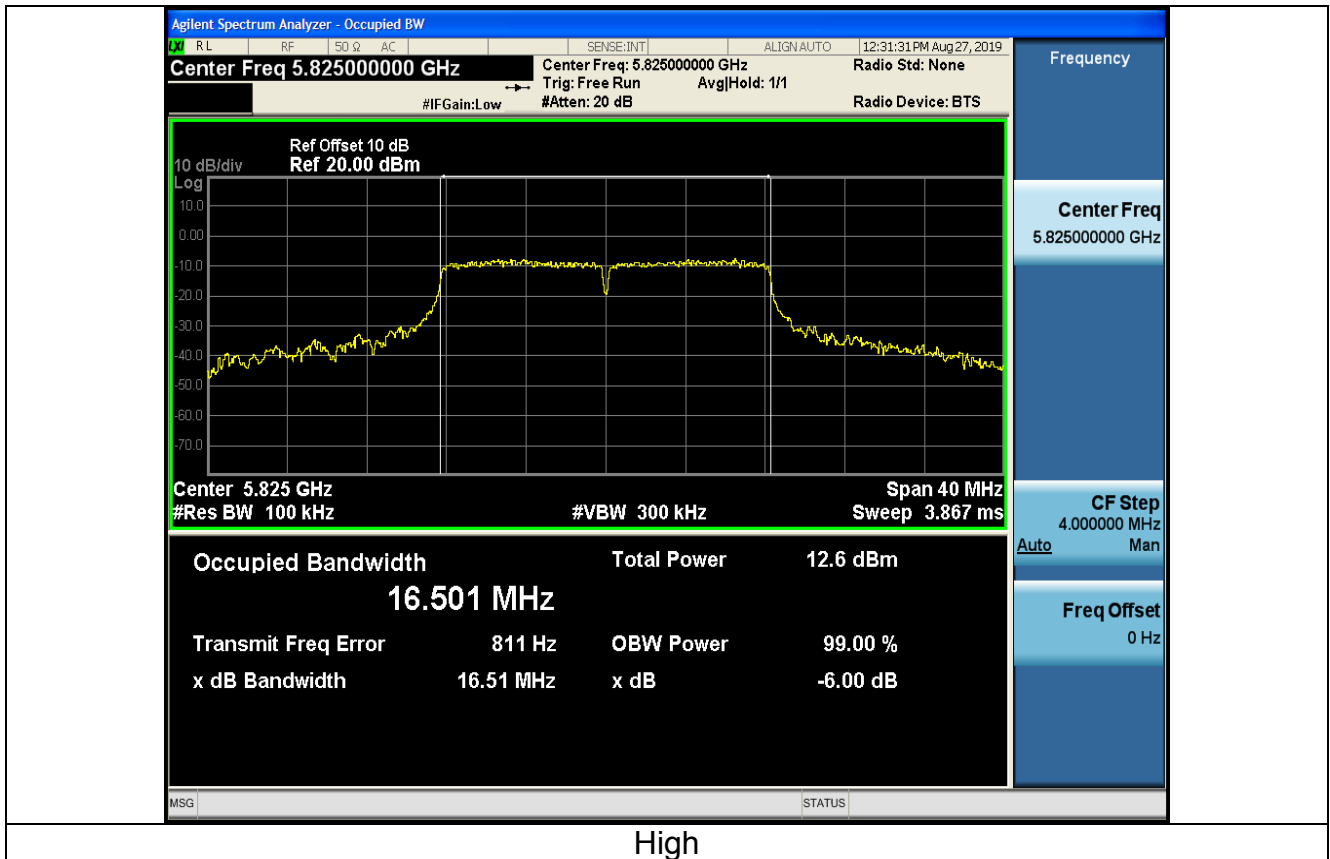


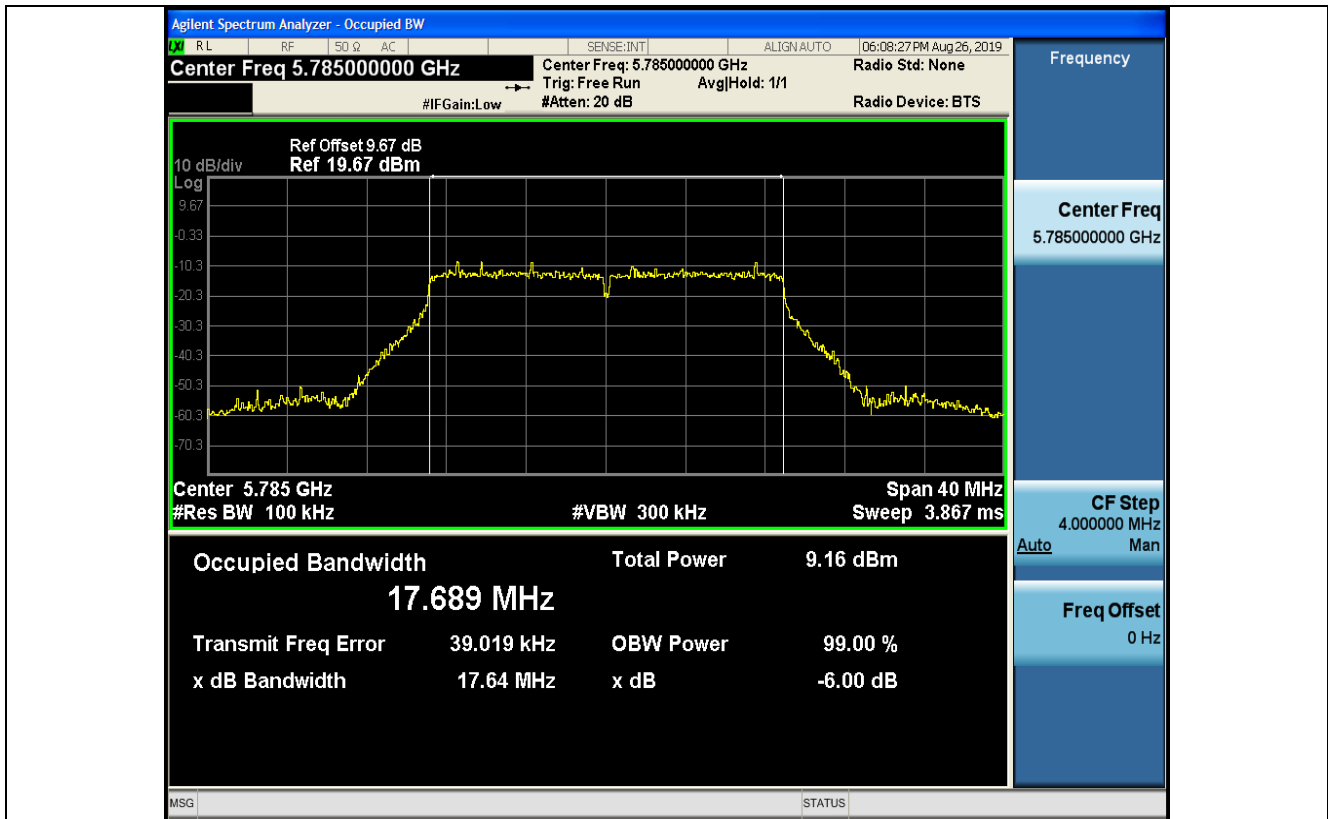

Mid

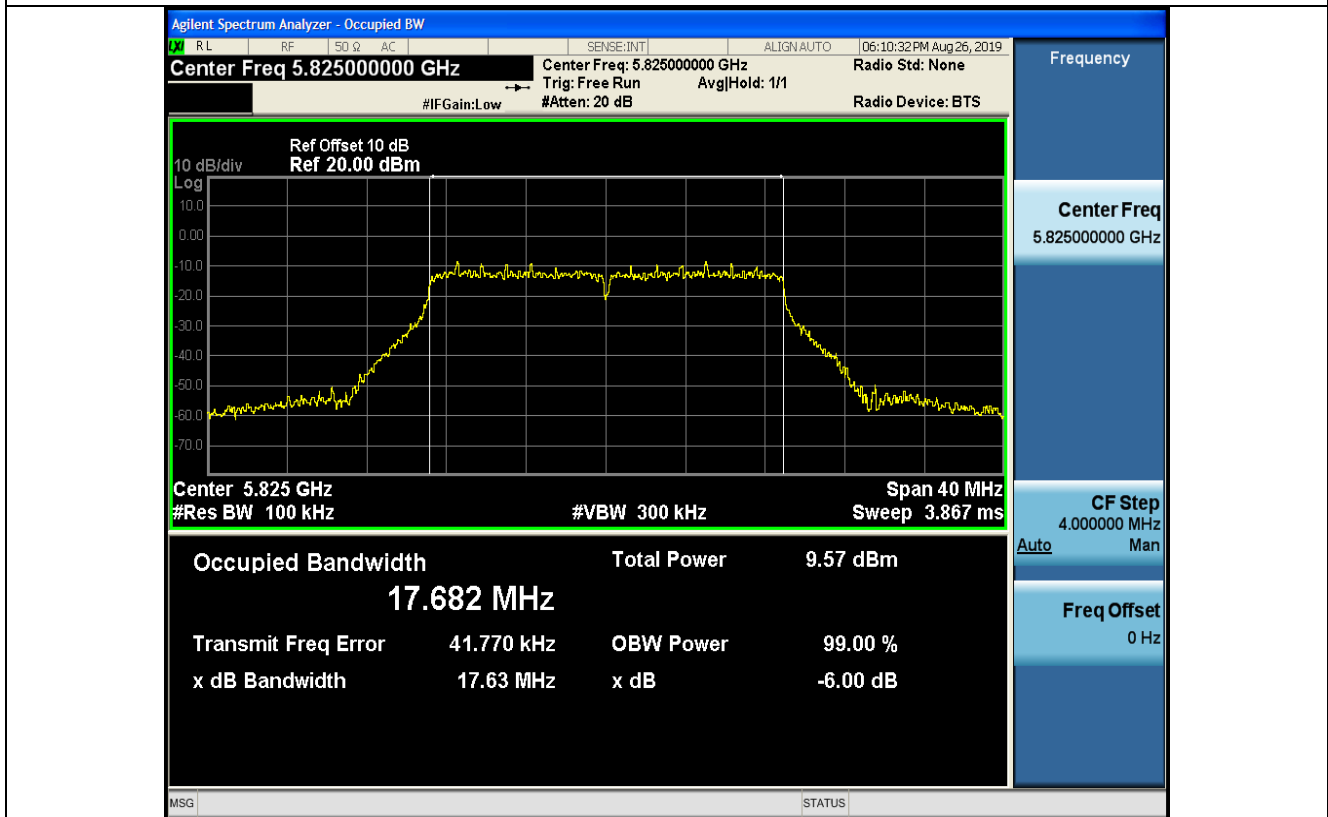


High

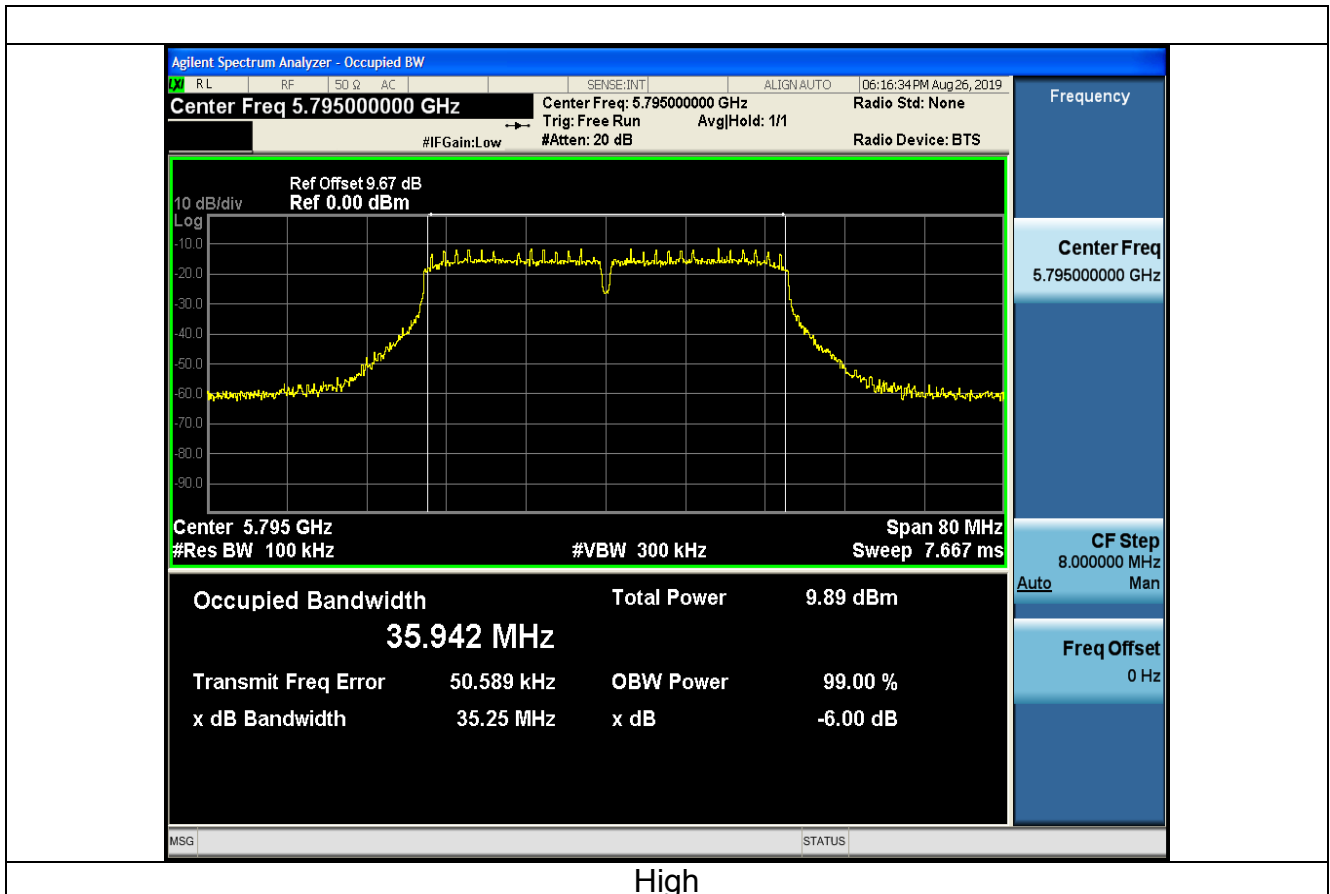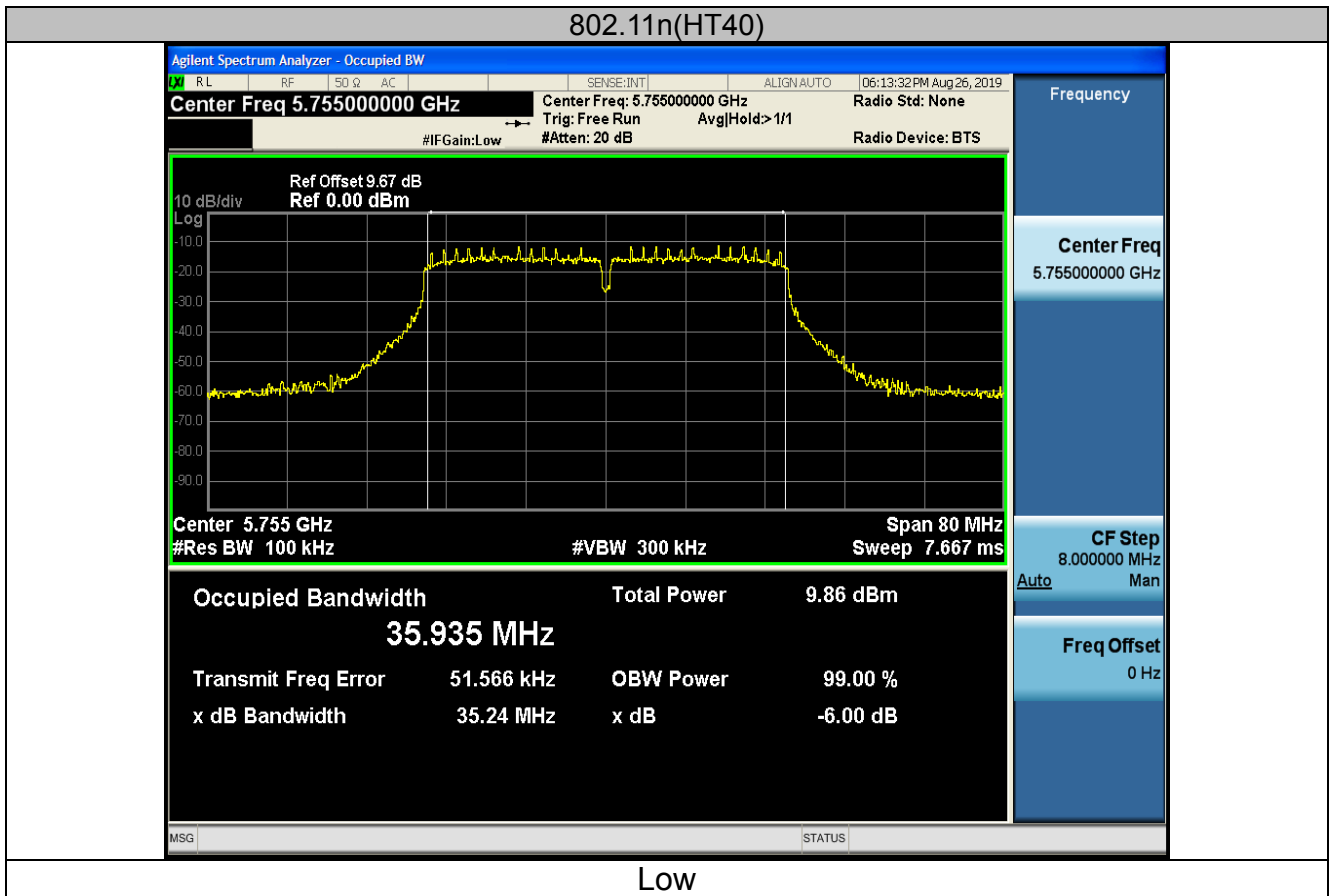






802.11ac(HT20)

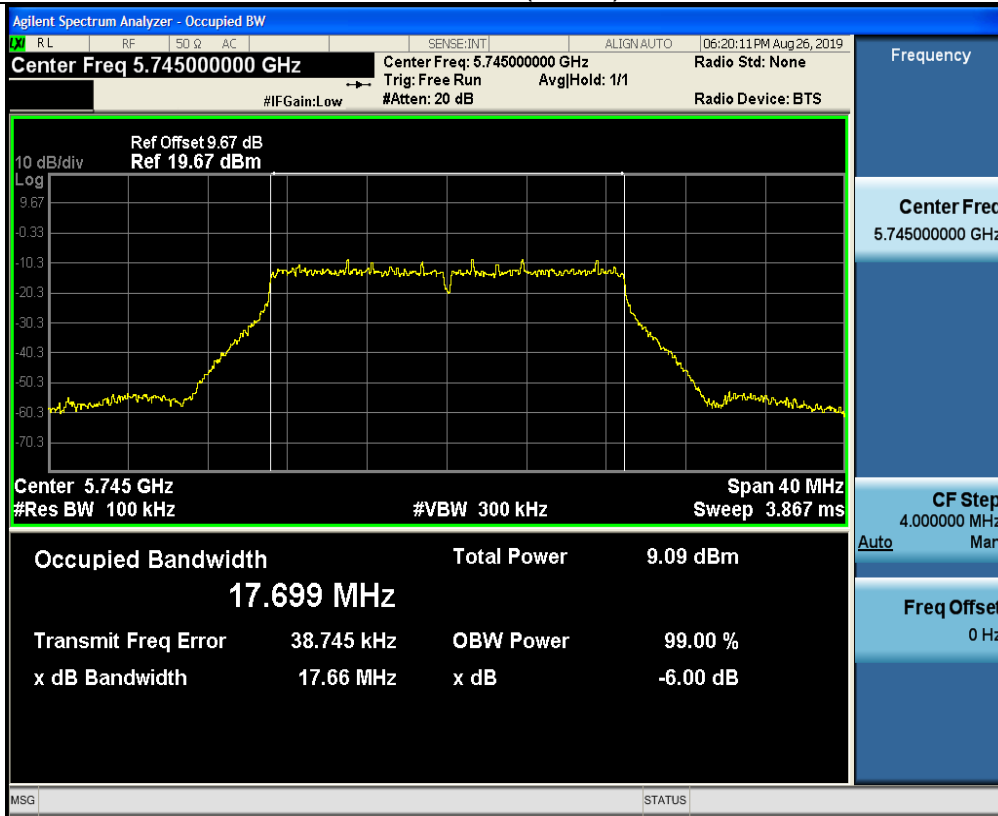


Low

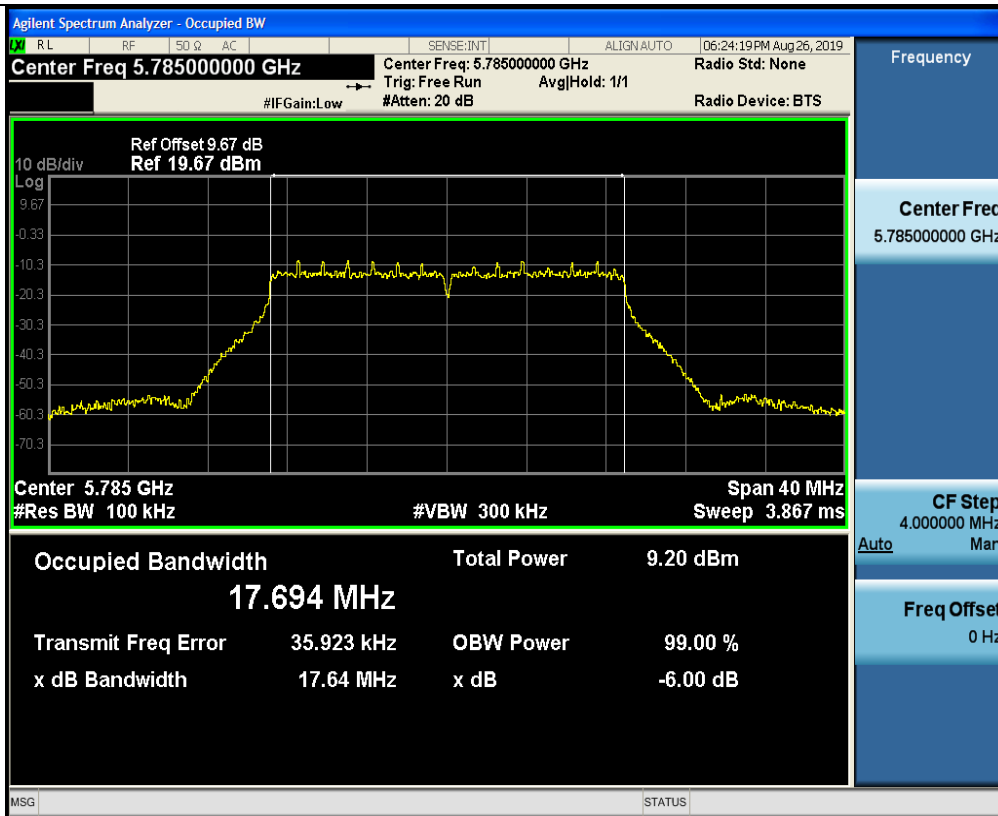


Mid

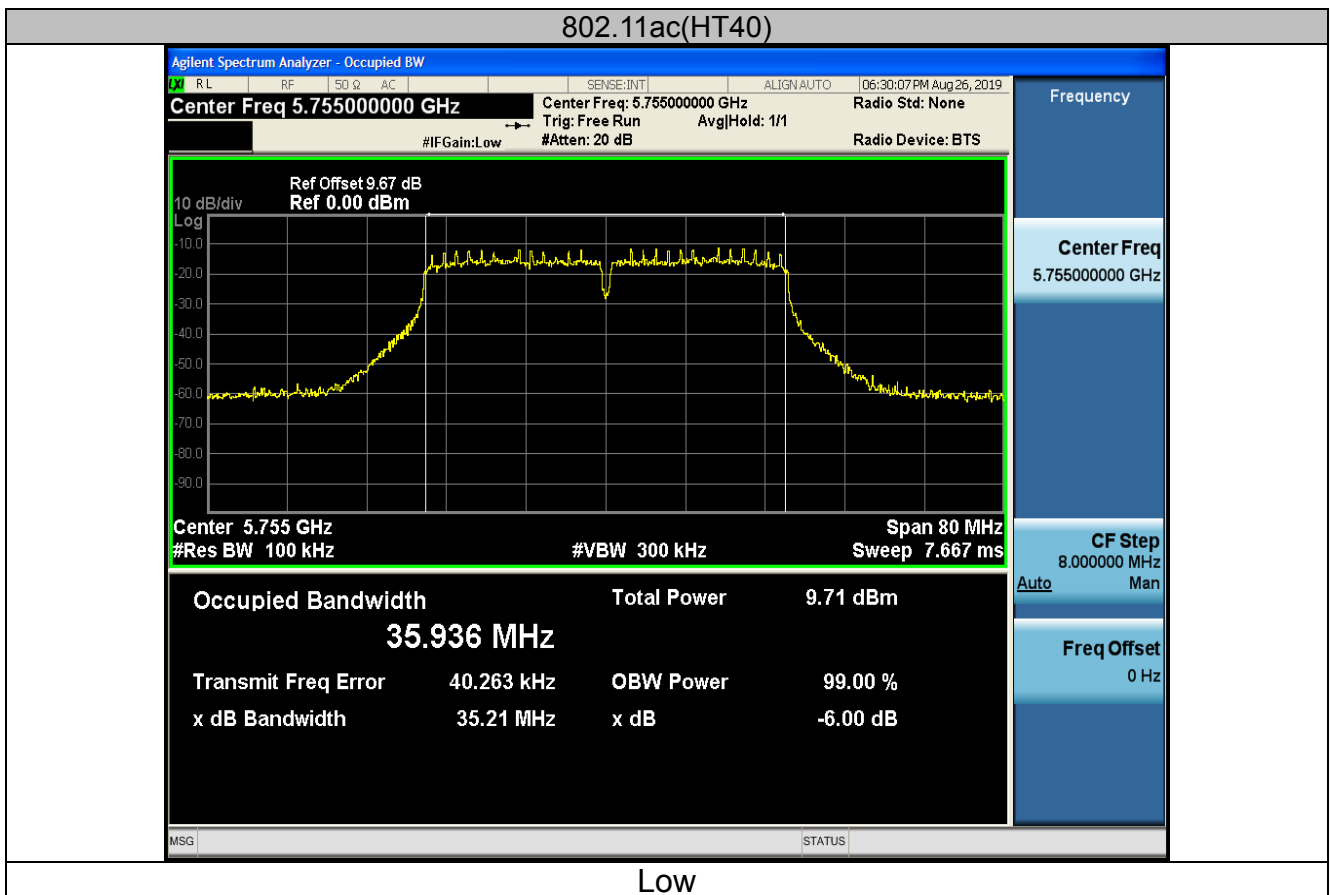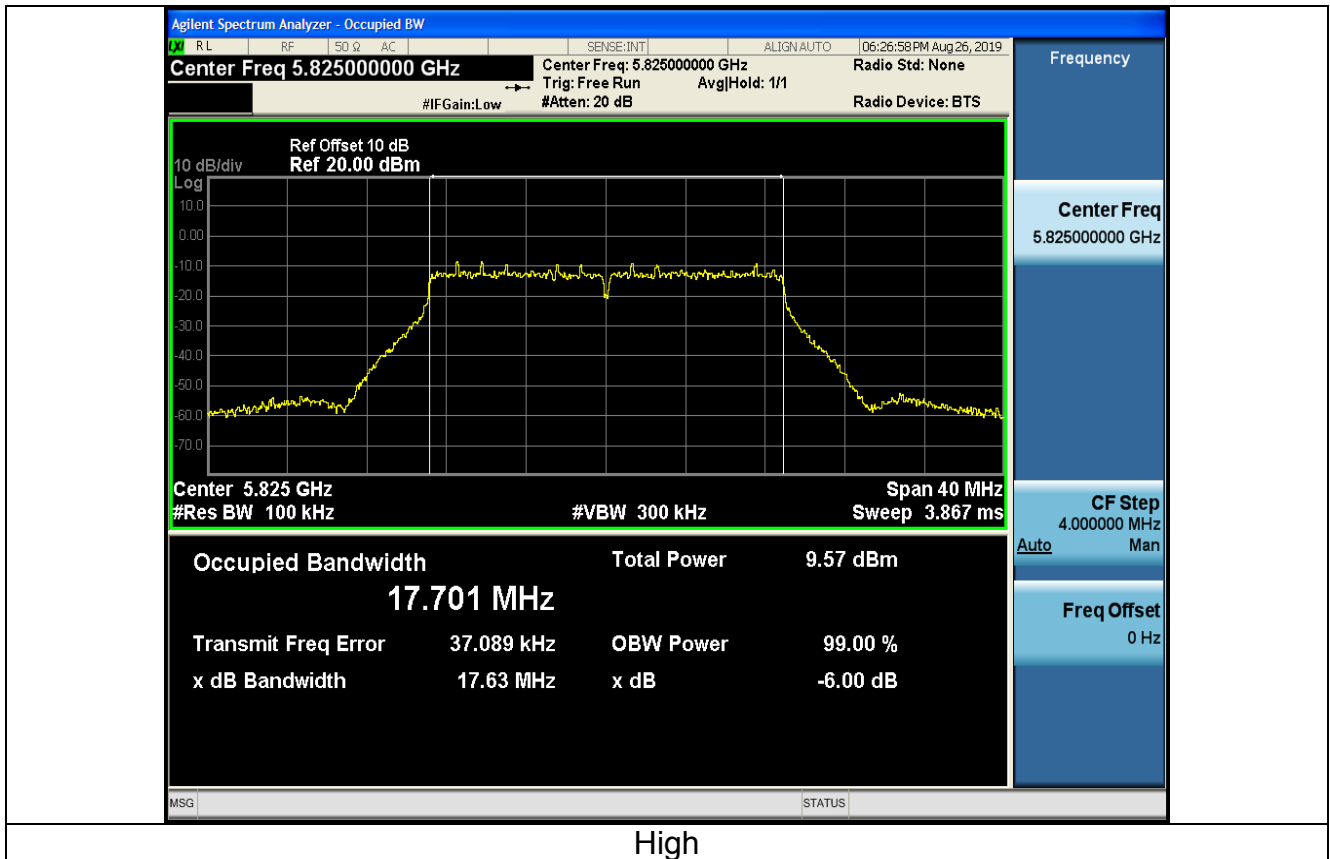

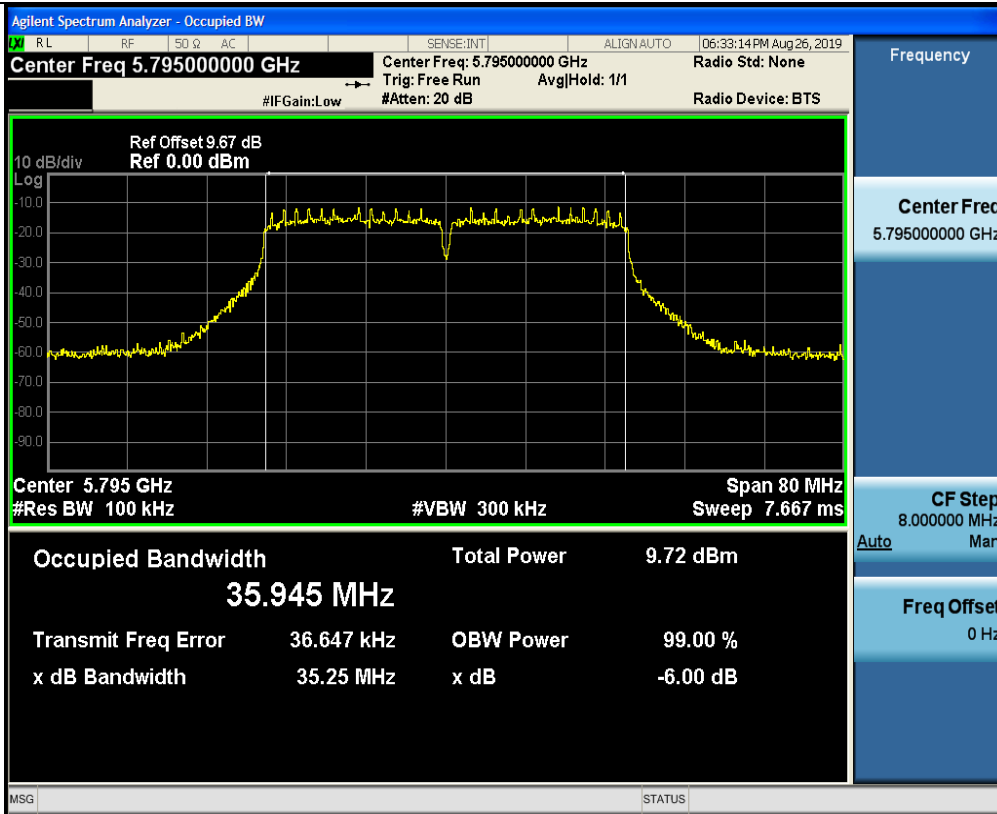

High


802.11ac(HT80)

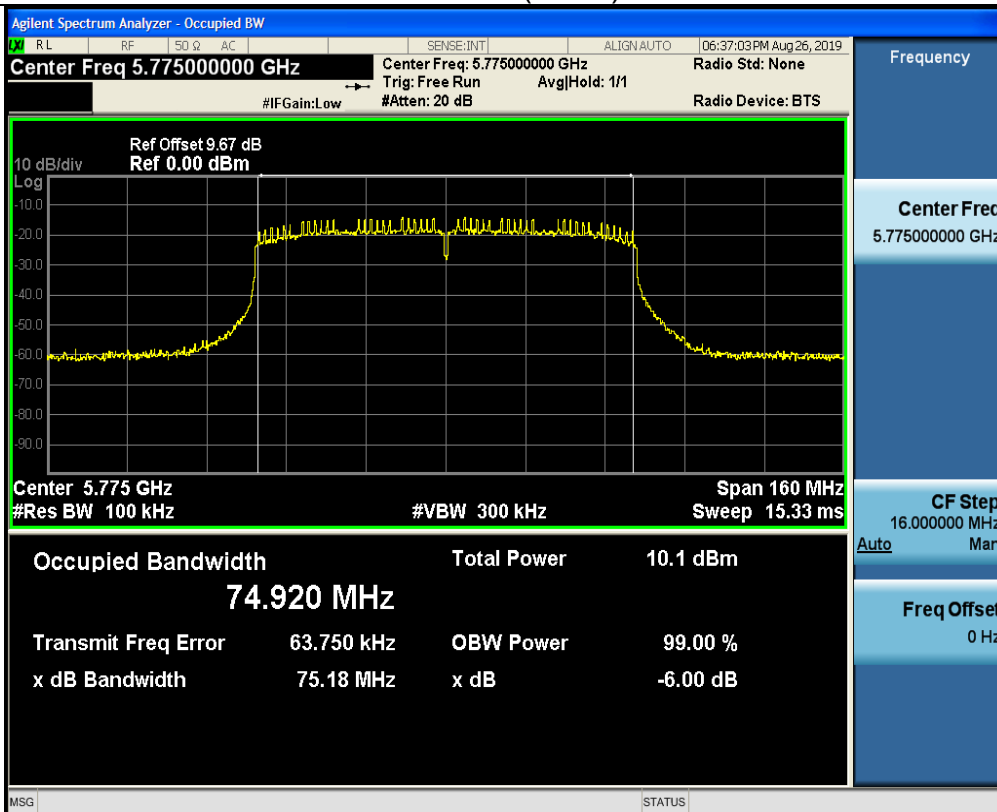



4.4. 26dB Bandwidth and 99% Occupied Bandwidth

4.4.1. Test Specification

Test Requirement:	47 CFR Part 15C Section 15.407 (a)& Part 2 J Section 2.1049
Test Method:	KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section C
Limit:	No restriction limits
Test Setup:	 <p style="text-align: center;">Spectrum Analyzer EUT</p>
Test Mode:	Transmitting mode with modulation
Test Procedure:	<ol style="list-style-type: none"> 1. KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section C 2. Set to the maximum power setting and enable the EUT transmit continuously. 3. Make the measurement with the spectrum analyzer's resolution bandwidth $RBW = 1\% EBW$, $VBW \geq 3RBW$, In order to make an accurate measurement. 4. Measure and record the results in the test report.
Test Result:	PASS

4.4.2. Test Instruments

RF Test Room				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 27, 2019
RF cable	Times	1-40G	HKE-034	Dec. 27, 2019
RF automatic control unit	Tonscend	JS0806-2	HKE-060	Dec. 27, 2019

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).



4.4.3. Test data


Band I

Mode	Test channel	Frequency (MHz)	26 dB Bandwidth (MHz)	Verdict
11a	CH36	5180	21.72	PASS
11a	CH40	5200	22.18	PASS
11a	CH48	5240	21.48	PASS
11n(HT20)	CH36	5180	22.44	PASS
11n(HT20)	CH40	5200	22.32	PASS
11n(HT20)	CH48	5240	22.22	PASS
11n(HT40)	CH38	5190	42.53	PASS
11n(HT40)	CH46	5230	43.37	PASS
11ac(HT20)	CH36	5180	21.82	PASS
11ac(HT20)	CH40	5200	21.67	PASS
11ac(HT20)	CH48	5240	21.81	PASS
11ac(HT40)	CH38	5190	41.73	PASS
11ac(HT40)	CH46	5230	41.87	PASS
11ac(HT80)	CH42	5210	83.79	PASS


Test plots as follows:





Band I (5150 – 5250 MHz)

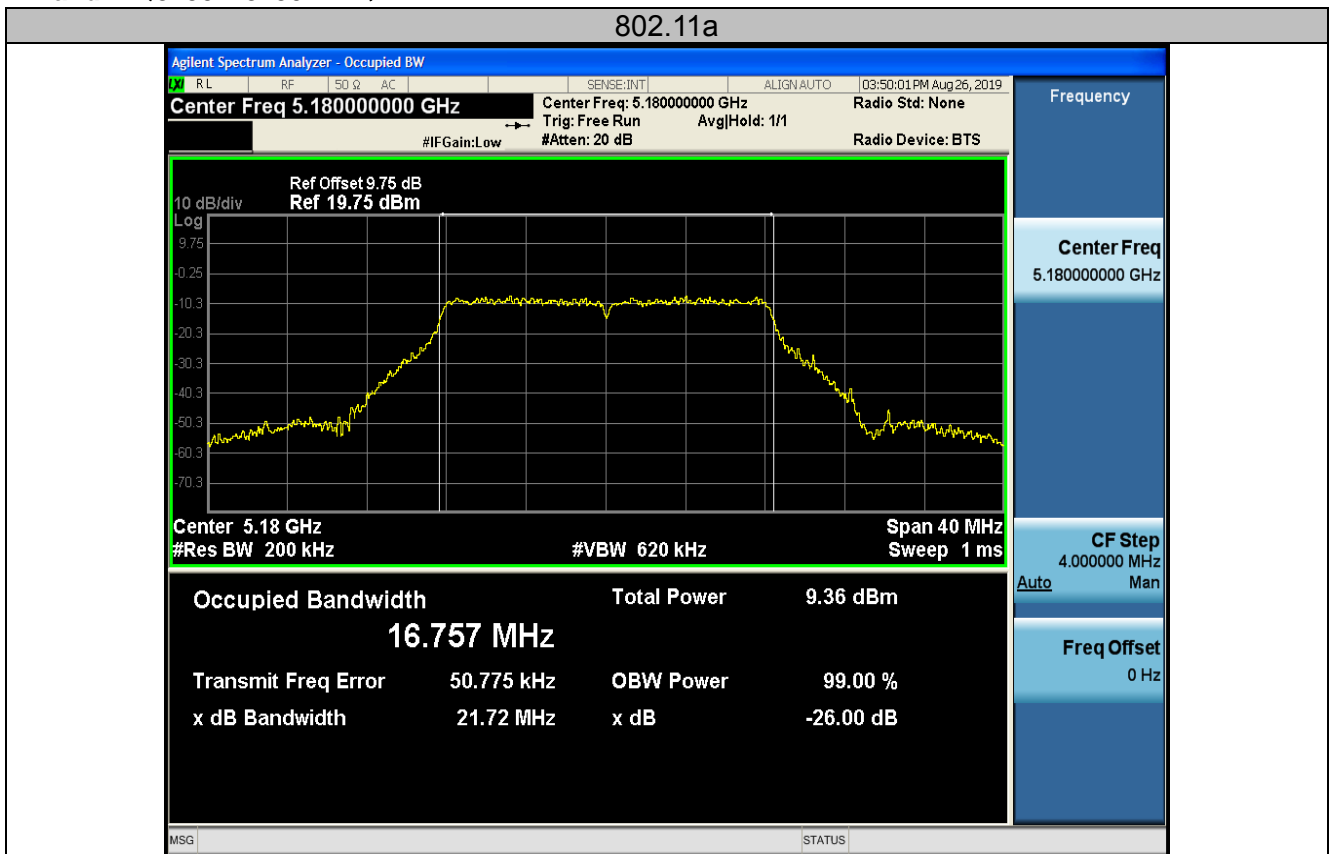


Low

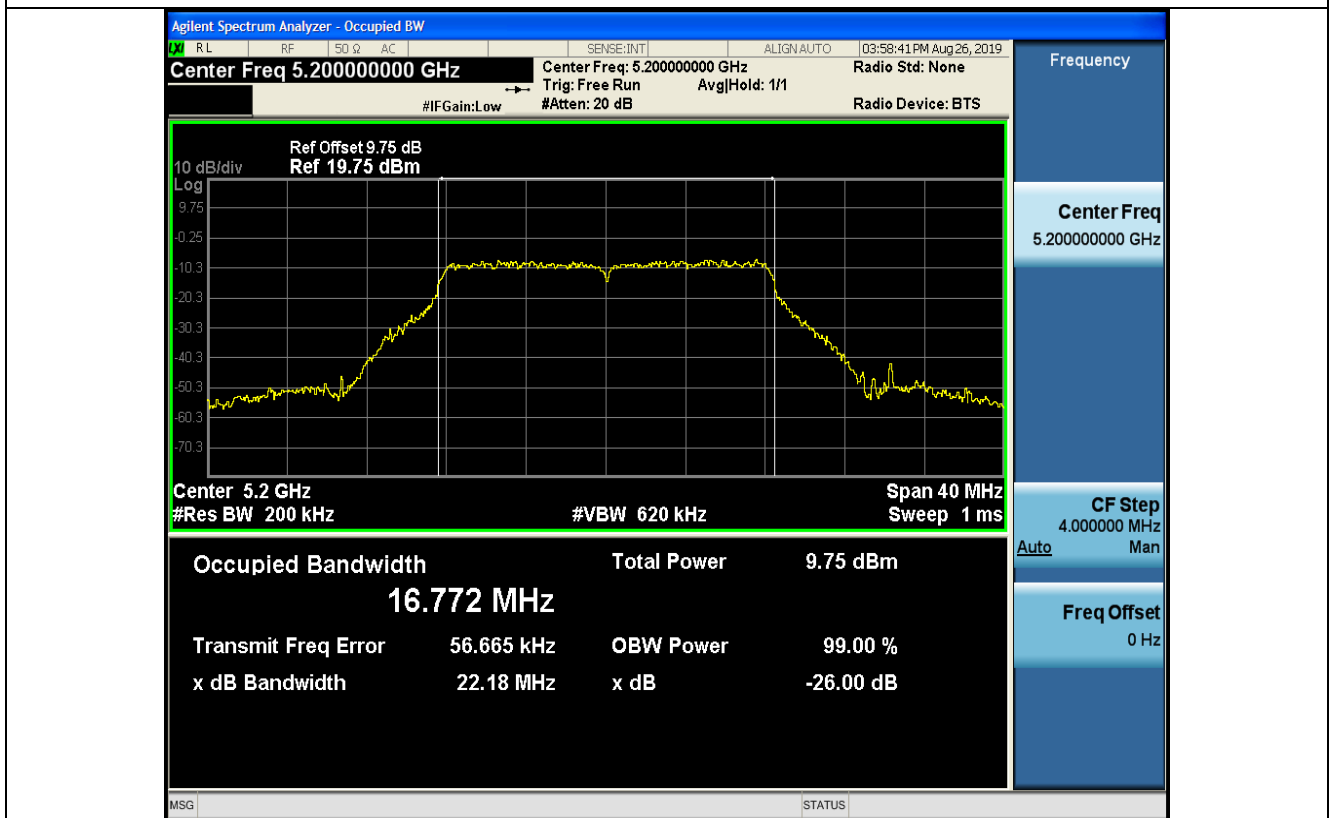


Mid

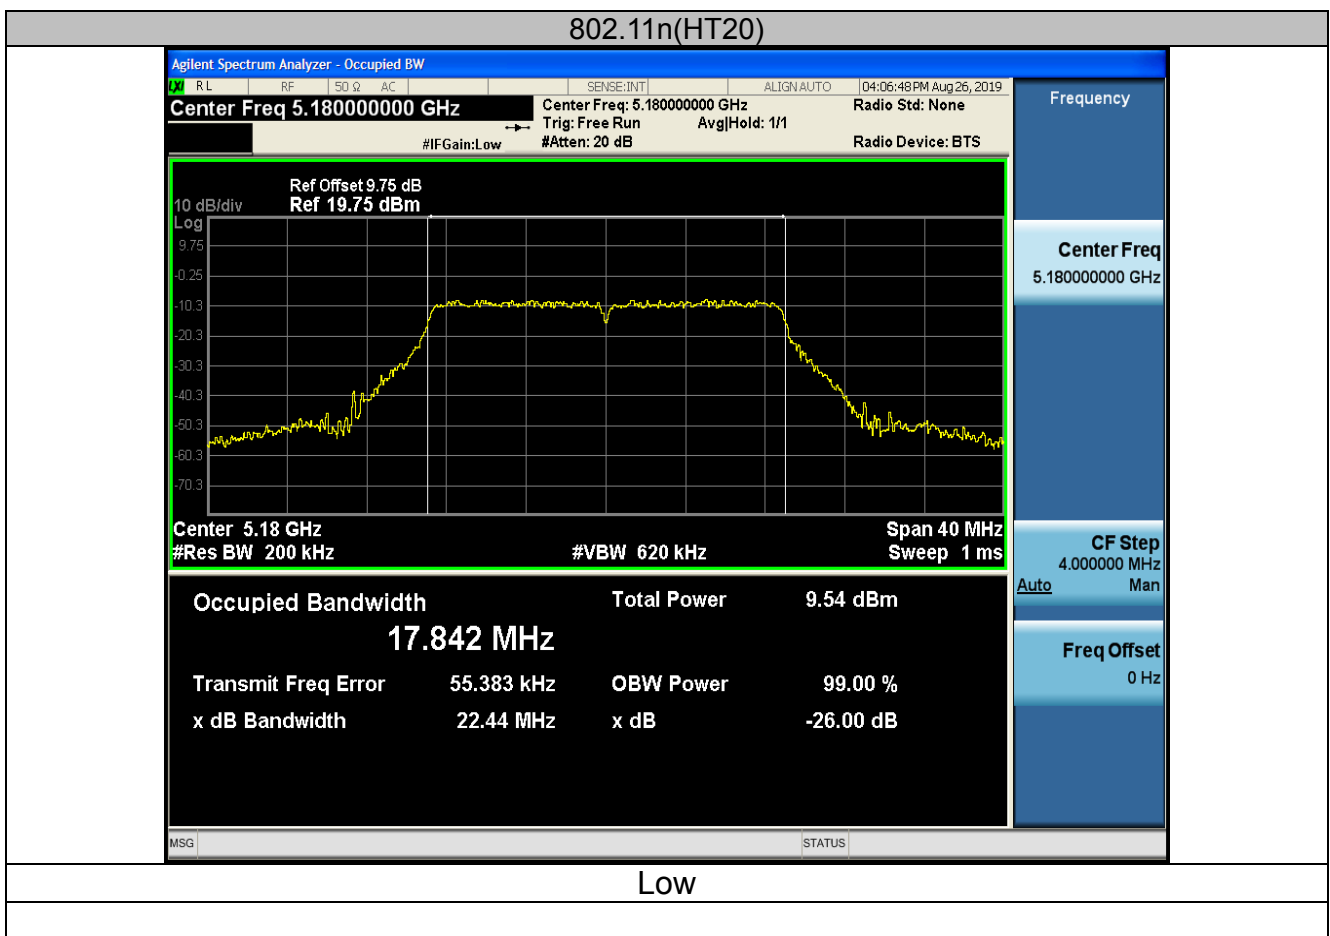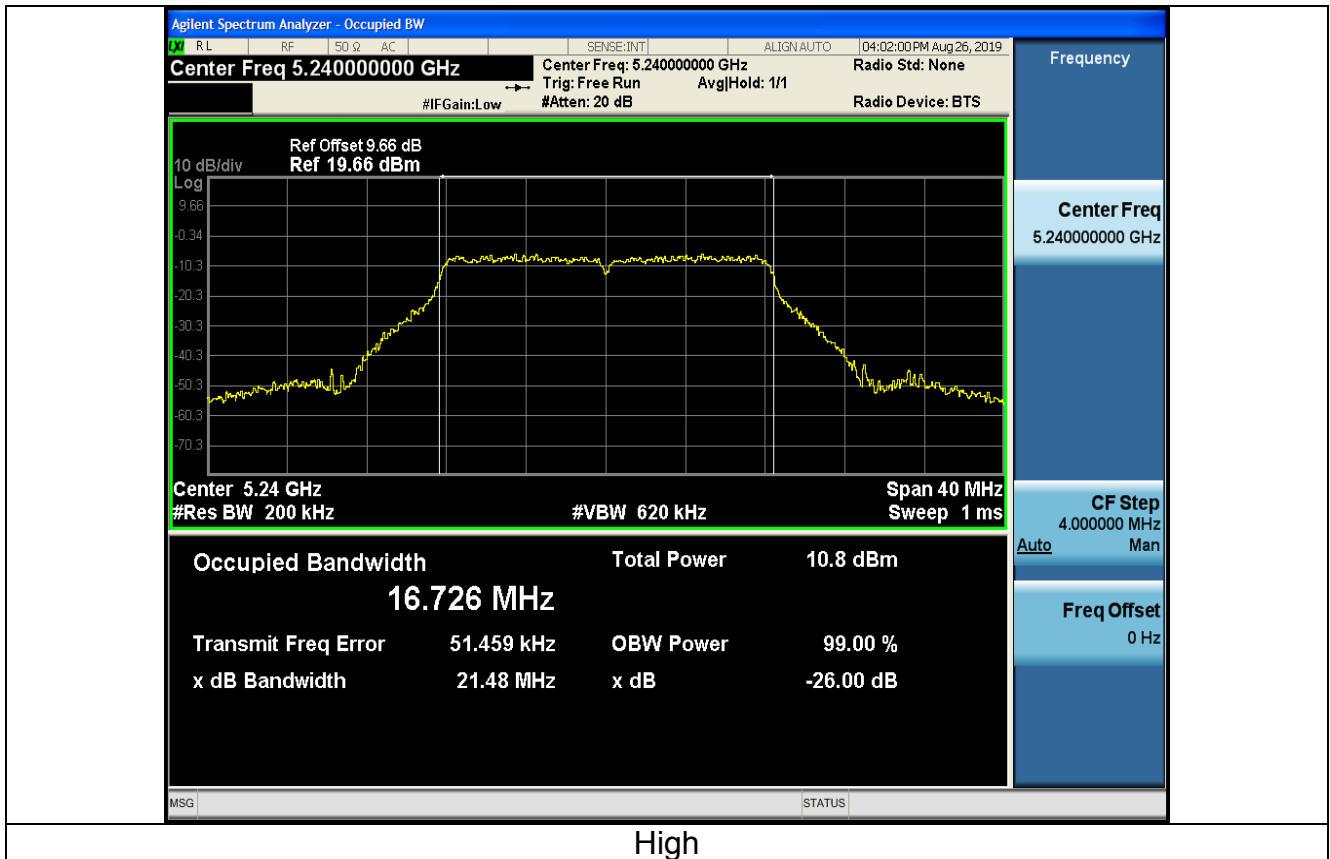

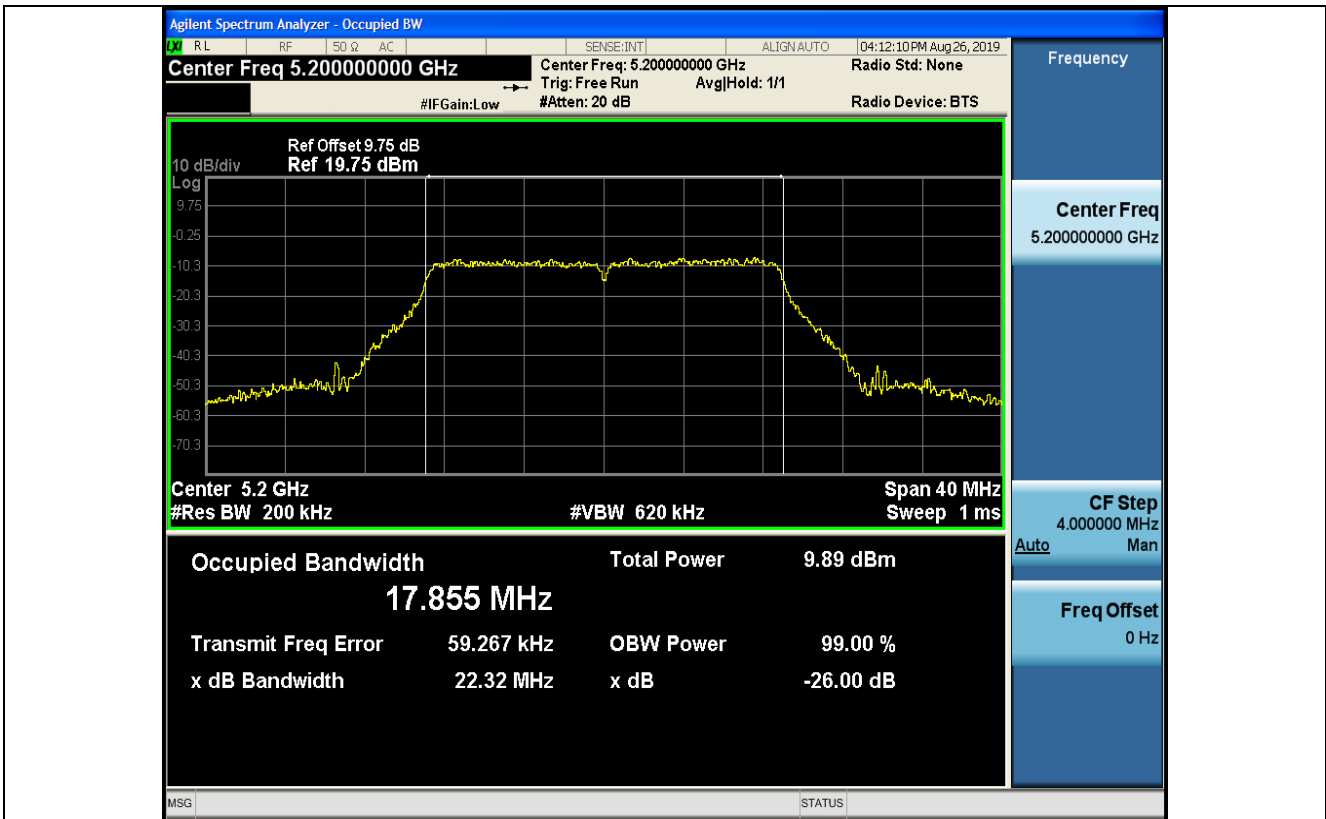


Mid

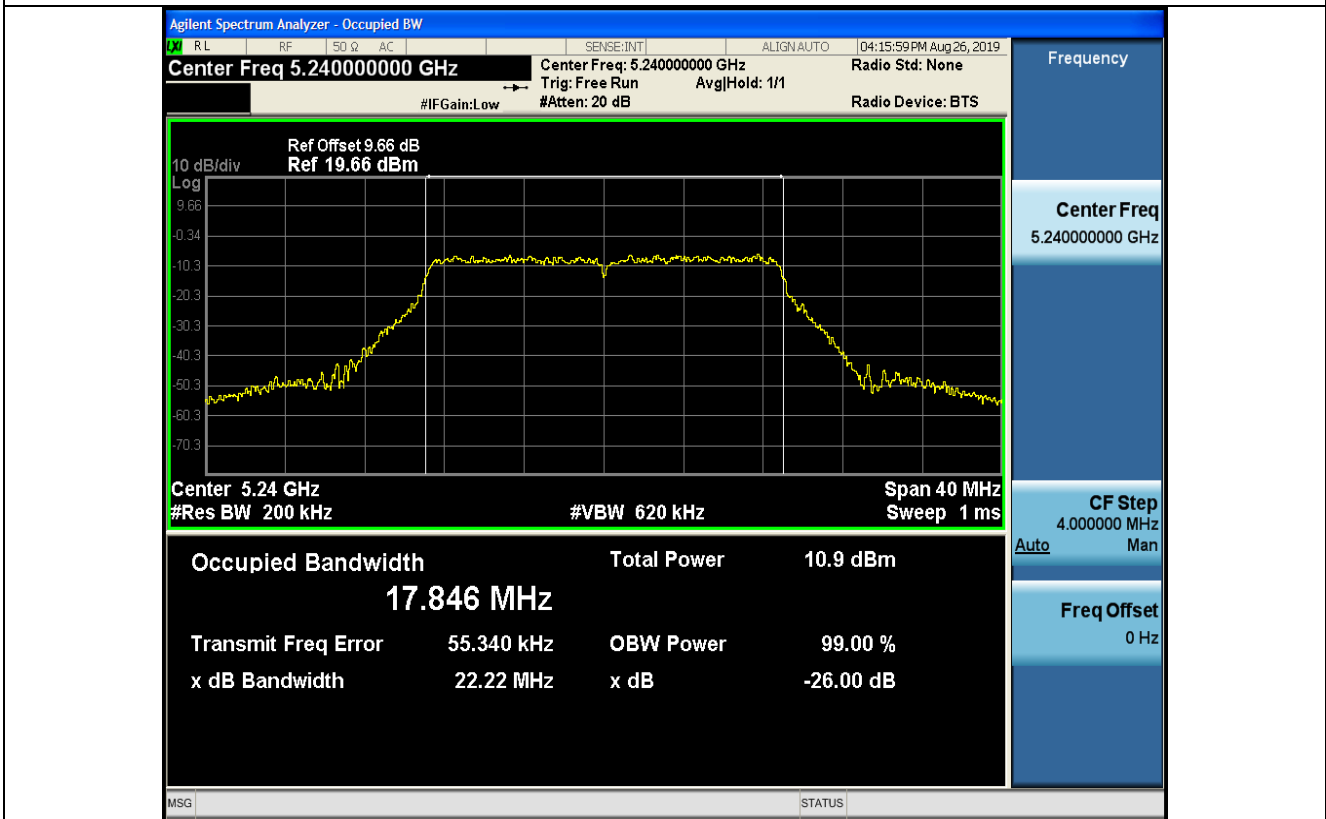


High



802.11n(HT40)

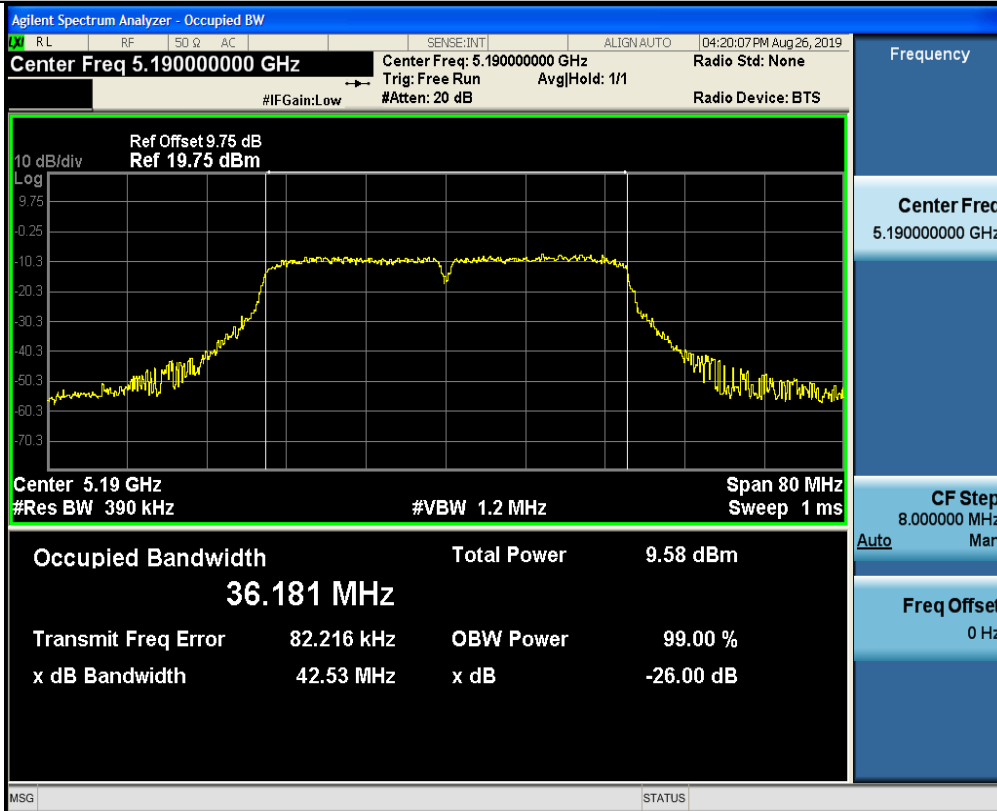


Low

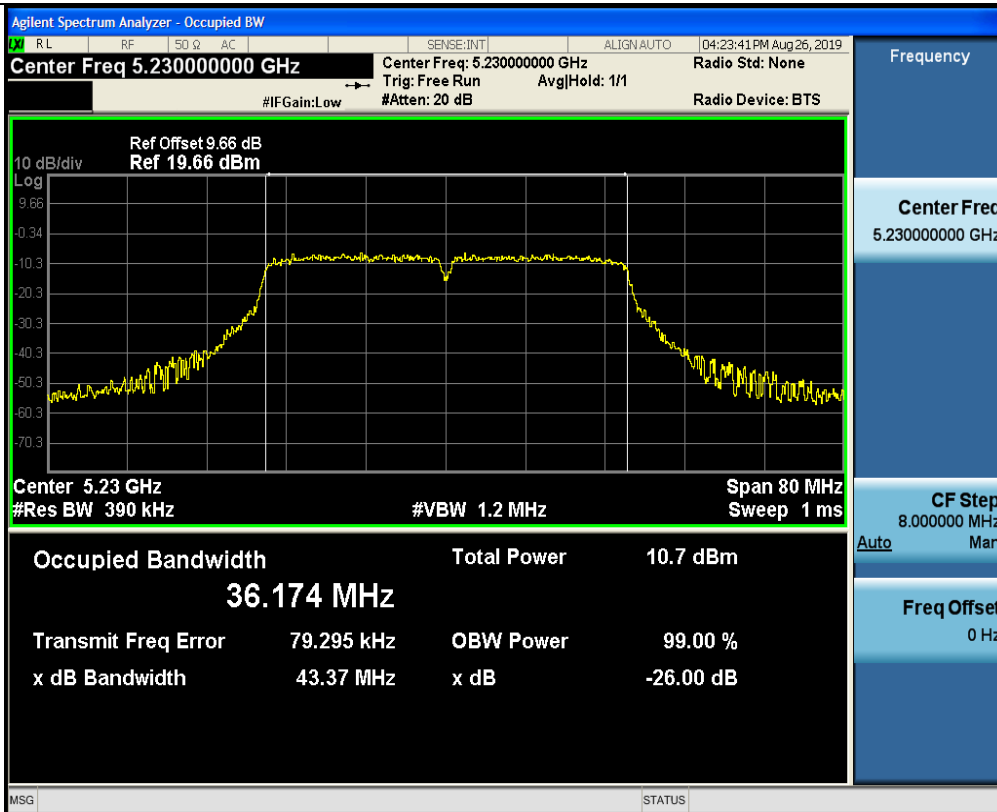


High





802.11ac(HT20)


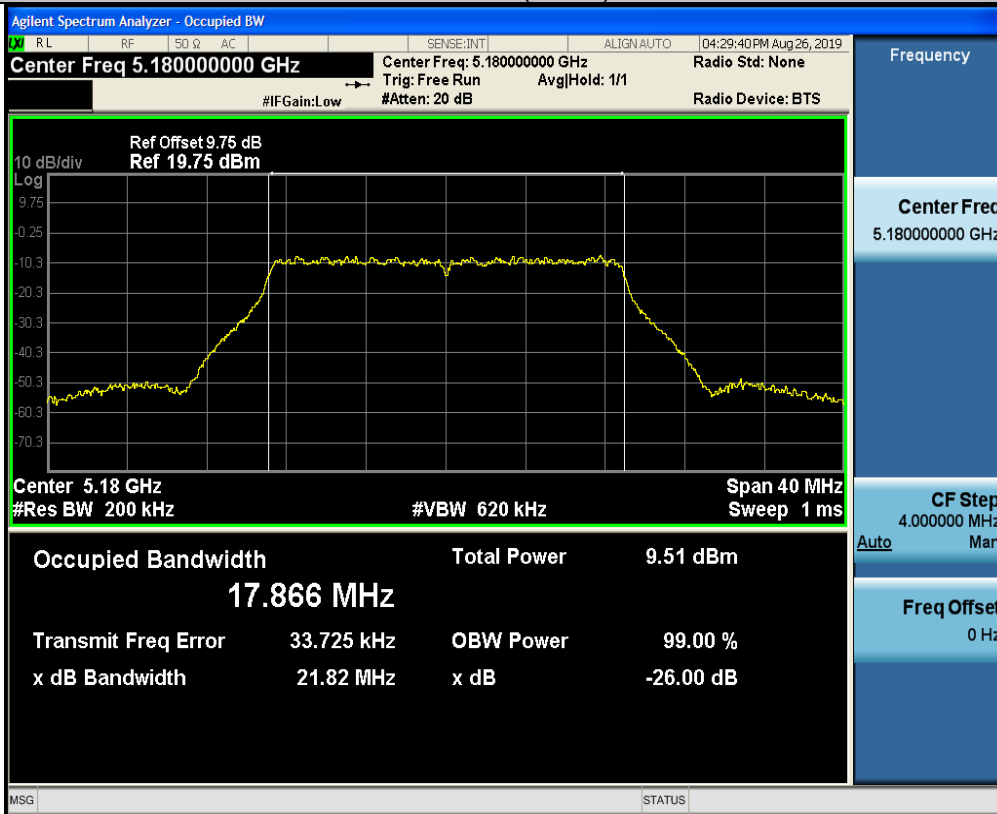


Low

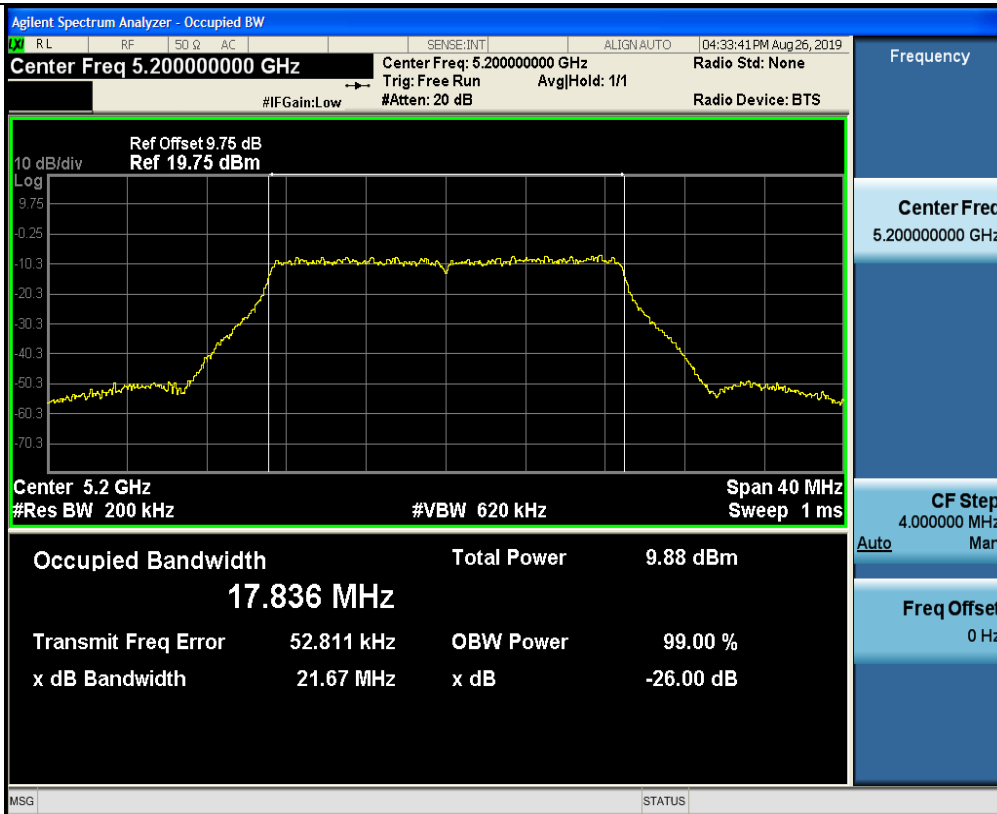

Mid

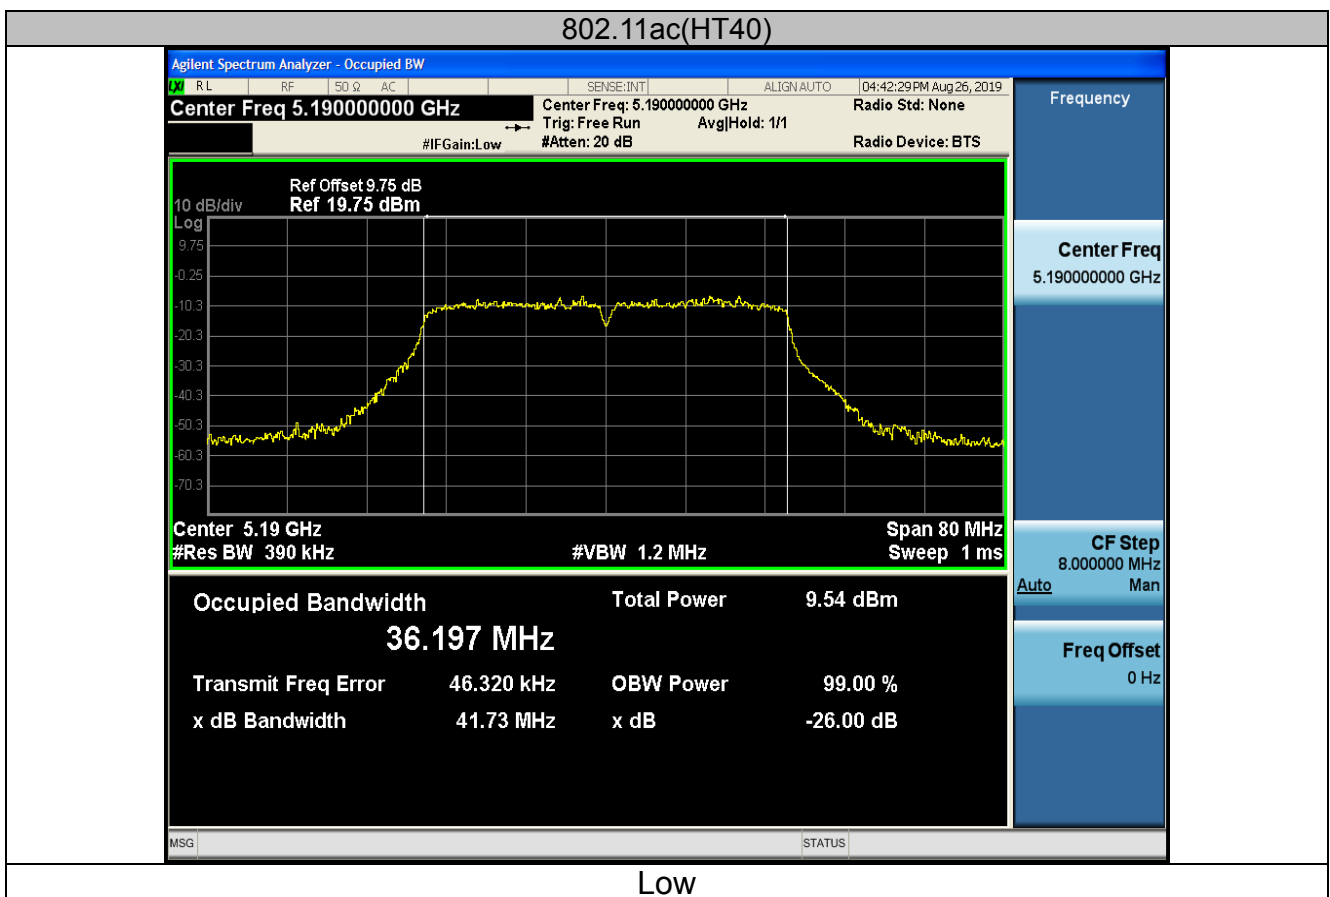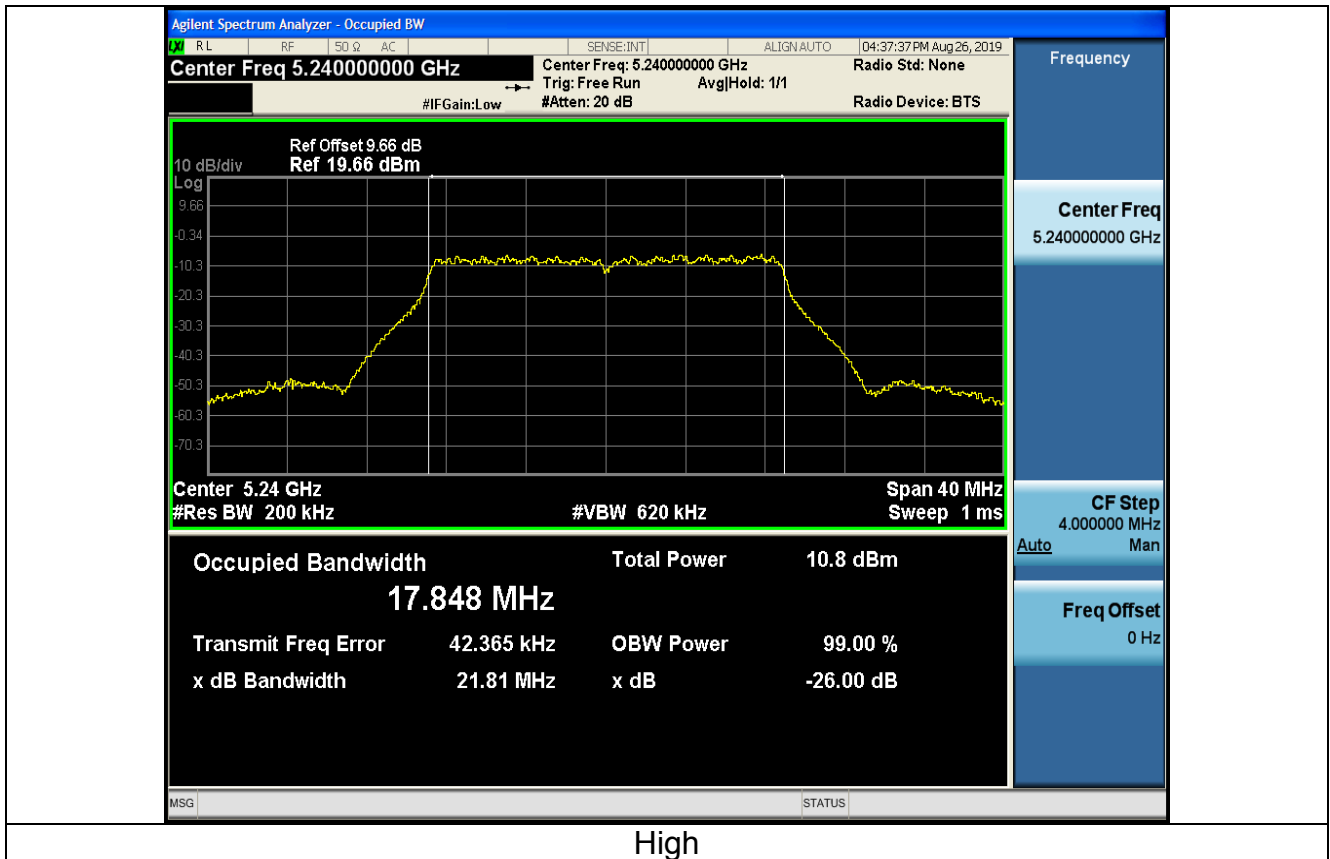

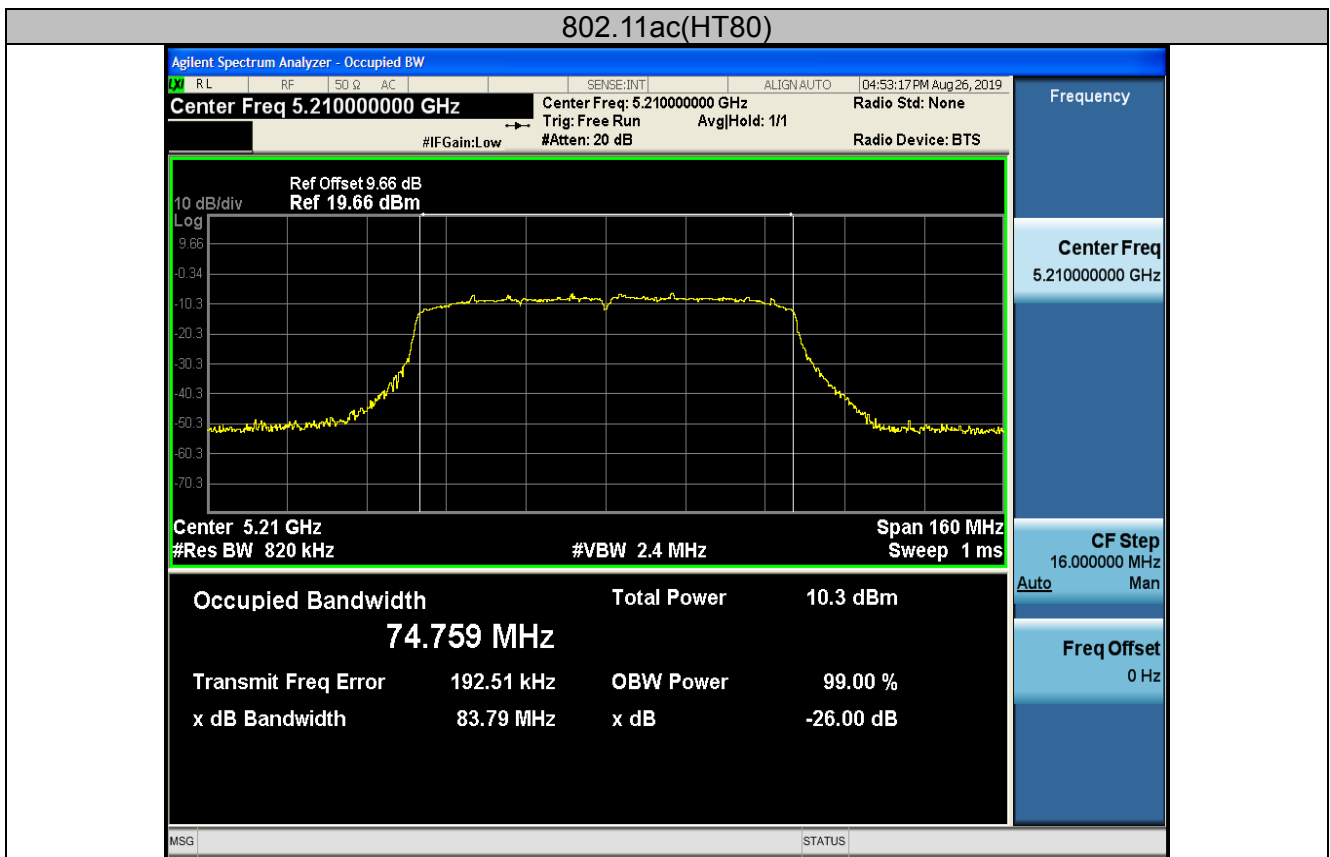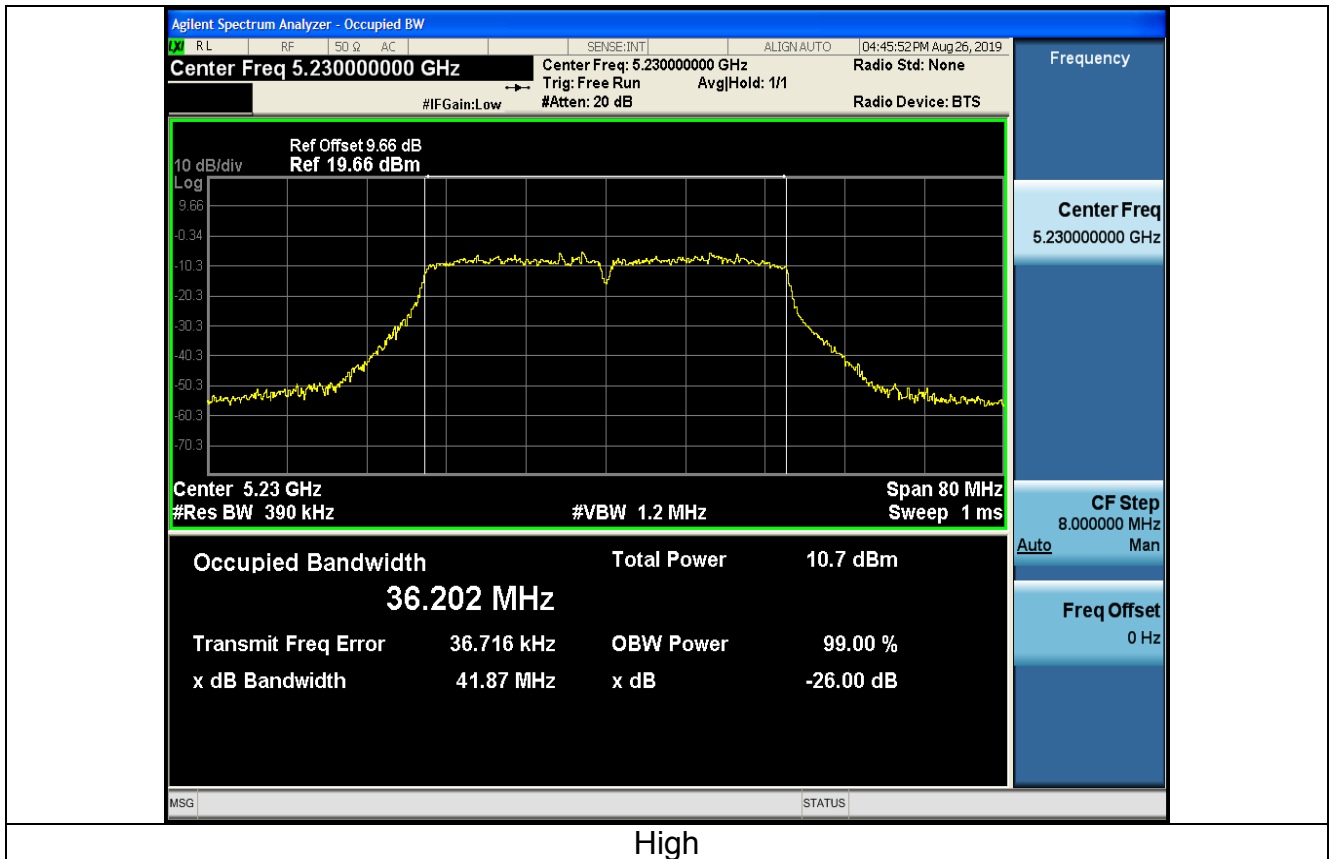



4.5.3. Test data

Configuration Band I (5150 - 5250 MHz)						
Mode	Test channel	Level [dBm/MHz]	10log(1/x) Factor [dB]	Power Spectral Density	Limit (dBm/MHz)	Result
11a	CH36	-1.94	0	-1.94	11	PASS
11a	CH40	-1.48	0	-1.48	11	PASS
11a	CH48	-0.59	0	-0.59	11	PASS
11n(HT20)	CH36	-2.13	0	-2.13	11	PASS
11n(HT20)	CH40	-2.10	0	-2.10	11	PASS
11n(HT20)	CH48	-0.66	0	-0.66	11	PASS
11n(HT40)	CH38	-5.57	0	-5.57	11	PASS
11n(HT40)	CH46	-4.35	0	-4.35	11	PASS
11ac(HT20)	CH36	-3.39	0	-3.39	11	PASS
11ac(HT20)	CH40	-2.19	0	-2.19	11	PASS
11ac(HT20)	CH48	-1.96	0	-1.96	11	PASS
11ac(HT40)	CH38	-5.08	0	-5.08	11	PASS
11ac(HT40)	CH46	-4.36	0	-4.36	11	PASS
11ac(HT80)	CH42	-8.08	0	-8.08	11	PASS



Configuration Band IV (5725 - 5850 MHz)						
Mode	Test channel	Level [dBm/500kHz]	10log(1/x) Factor[dB]	Power Spectral Density	Limit (dBm/500kHz)	Result
11a	CH149	-5.15	0	-5.15	30	PASS
11a	CH157	-5.23	0	-5.23	30	PASS
11a	CH161	-2.07	0	-2.07	30	PASS
11n(HT20)	CH149	-5.19	0	-5.19	30	PASS
11n(HT20)	CH157	-5.24	0	-5.24	30	PASS
11n(HT20)	CH161	-4.91	0	-4.91	30	PASS
11n(HT40)	CH151	-7.58	0	-7.58	30	PASS
11n(HT40)	CH159	-8.13	0	-8.13	30	PASS
11ac(HT20)	CH149	-5.42	0	-5.42	30	PASS
11ac(HT20)	CH157	-5.25	0	-5.25	30	PASS
11ac(HT20)	CH161	-4.47	0	-4.47	30	PASS
11ac(HT40)	CH151	-7.05	0	-7.05	30	PASS
11ac(HT40)	CH159	-7.15	0	-7.15	30	PASS
11ac(HT80)	CH155	-10.57	0	-10.57	30	PASS

Test plots as follows:



Band I (5150 – 5250 MHz)


802.11a




Low




Mid

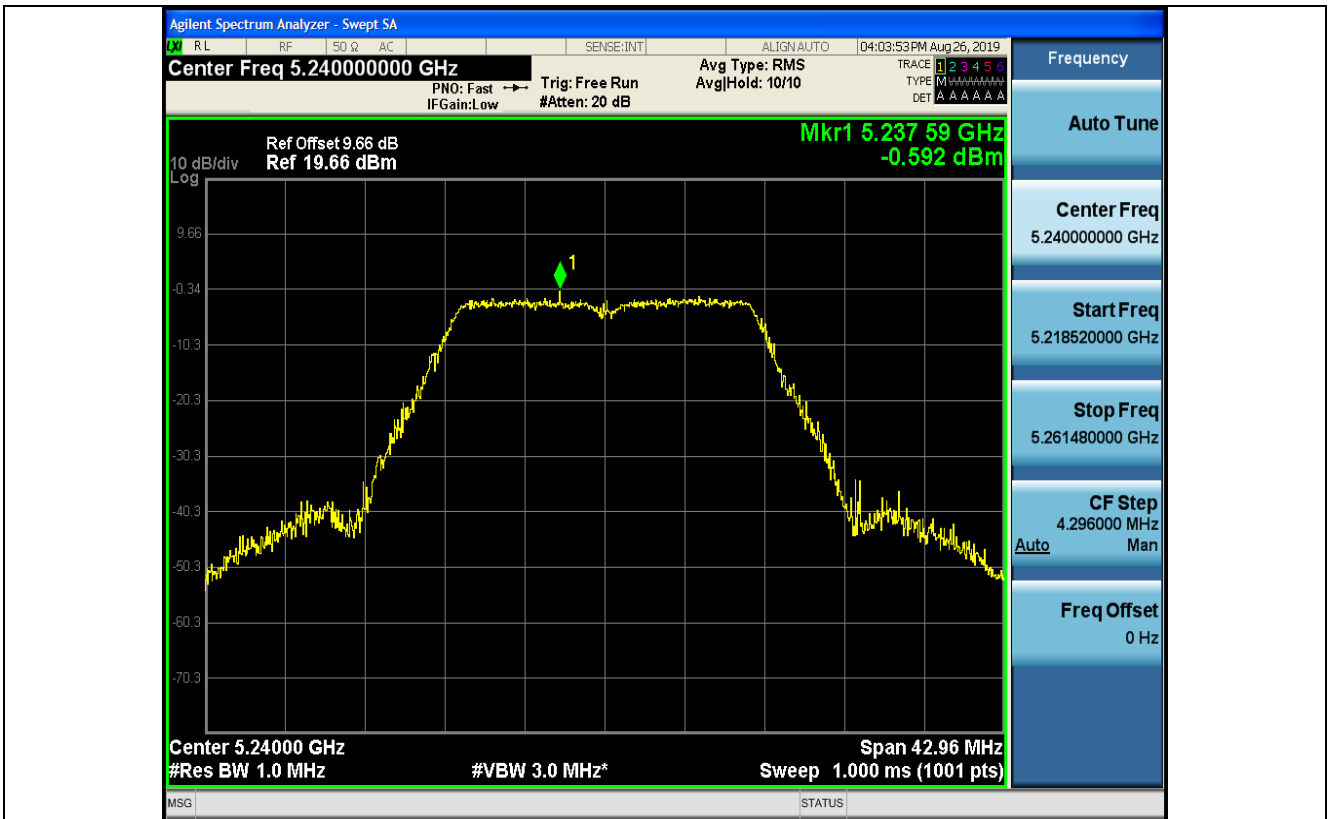


High

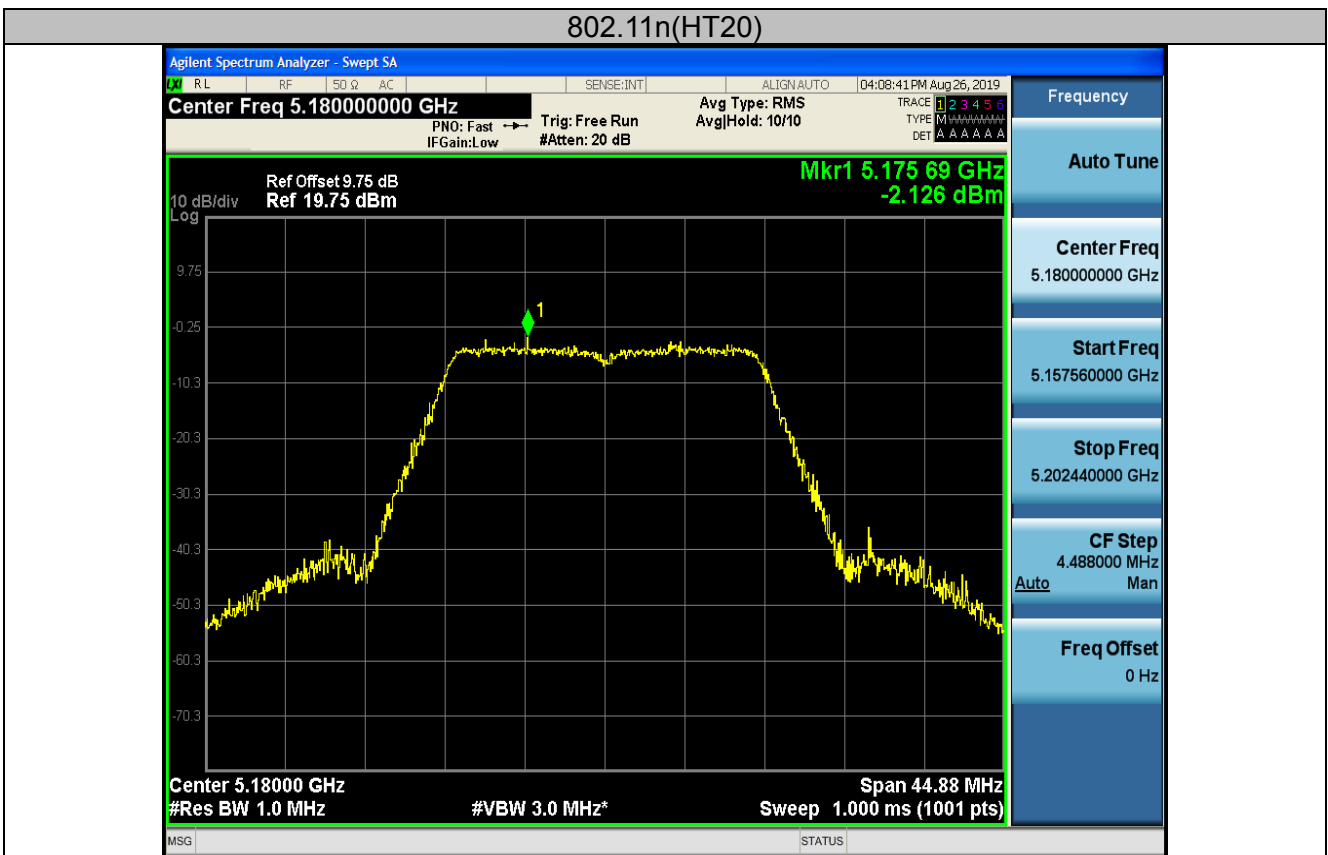

Low

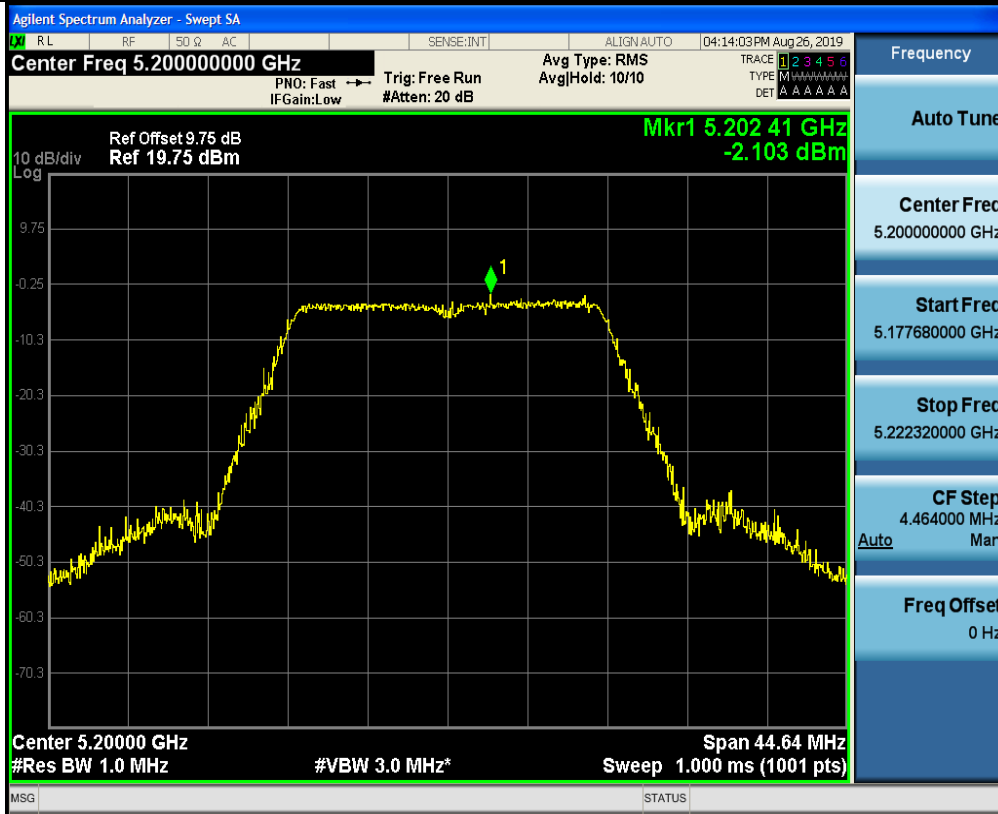


Mid

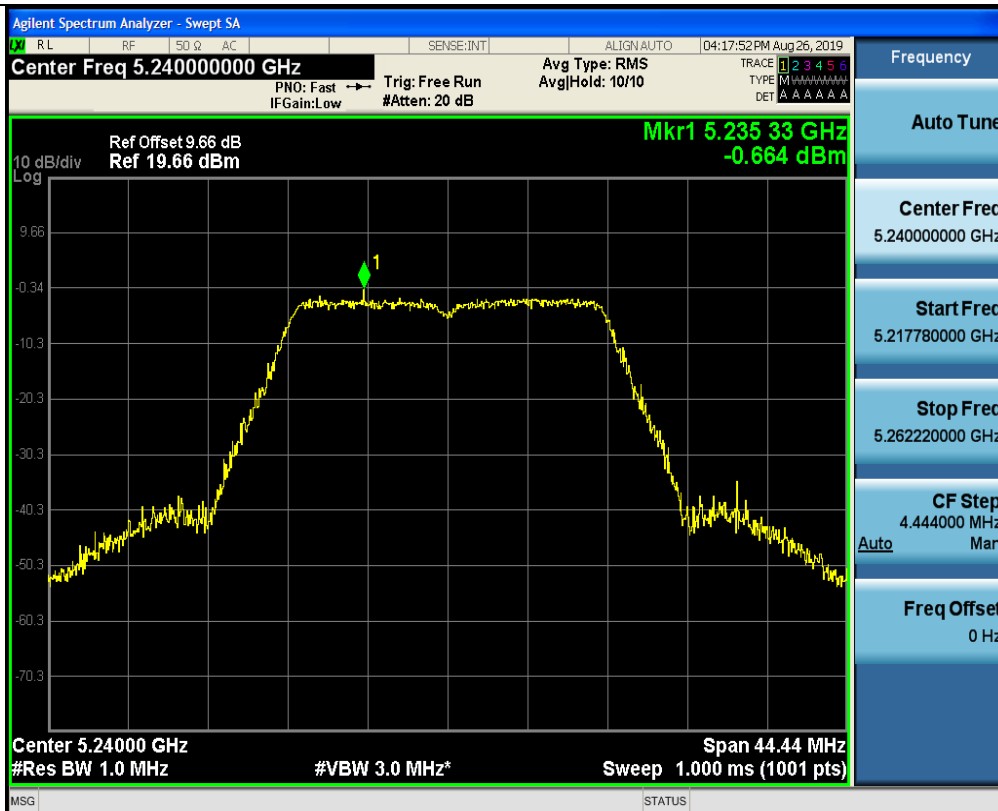


High



802.11n(HT40)

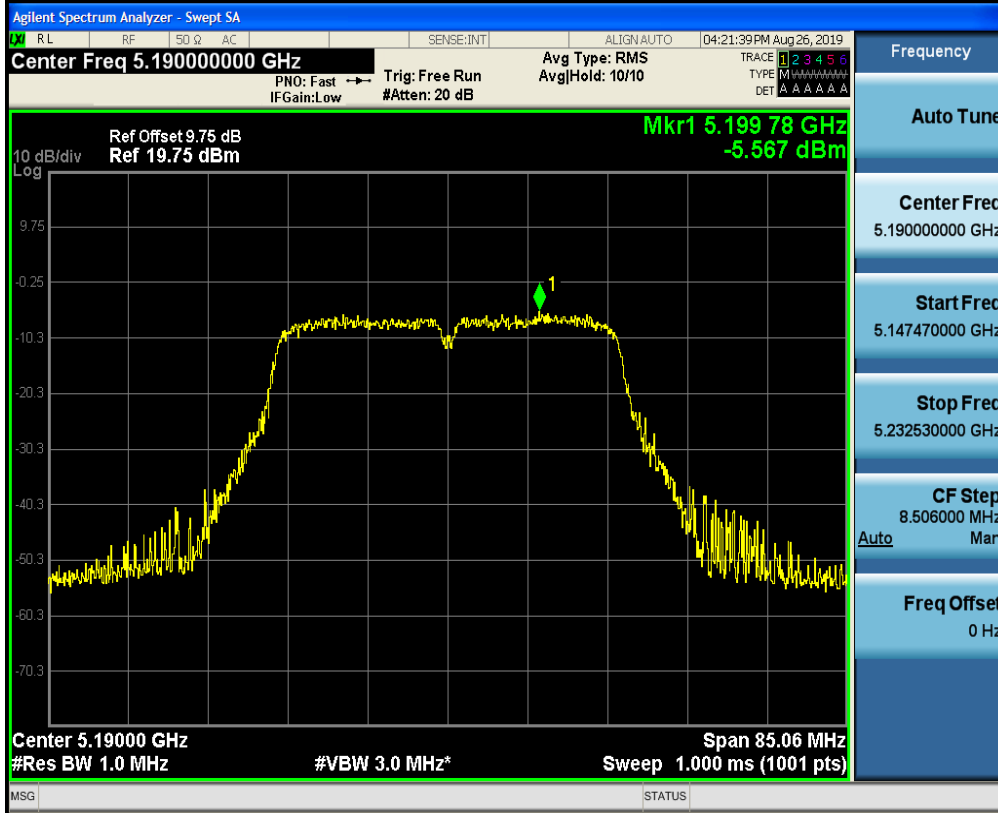


Low

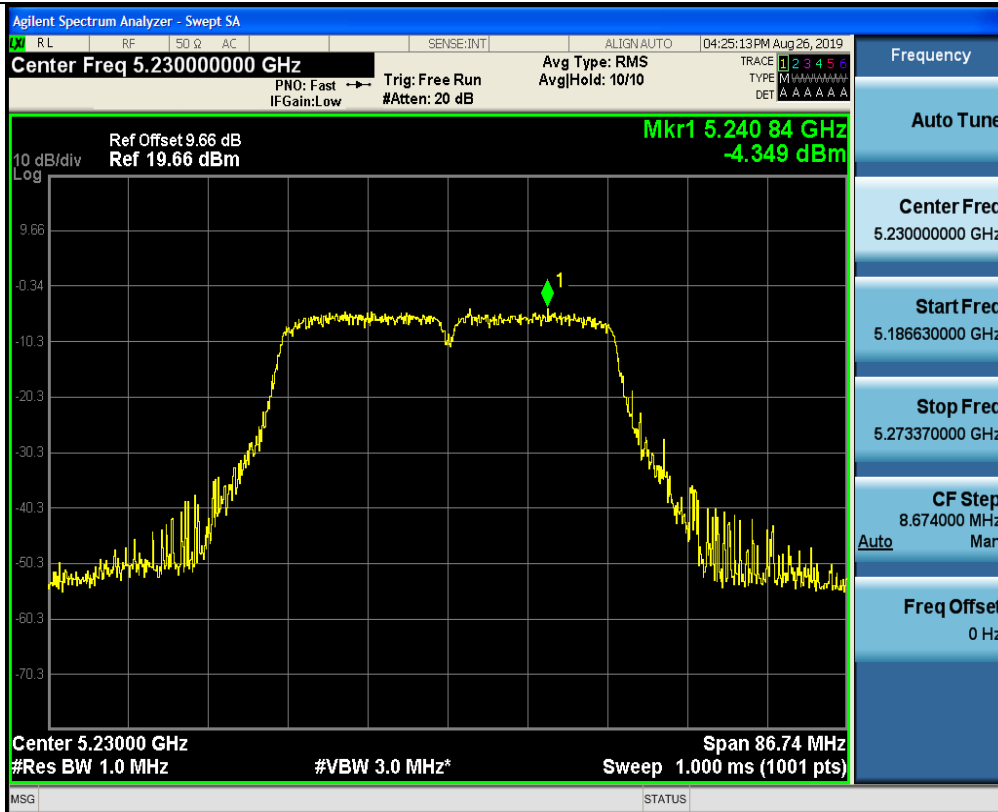


High




802.11ac(HT20)

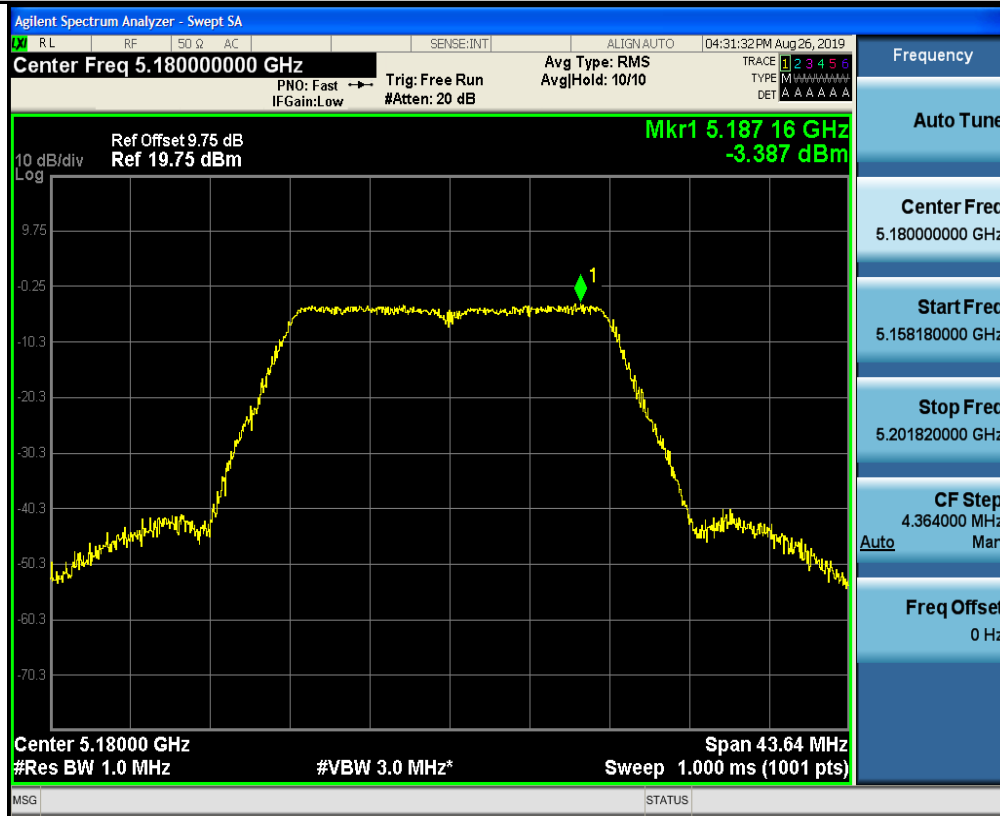

Low

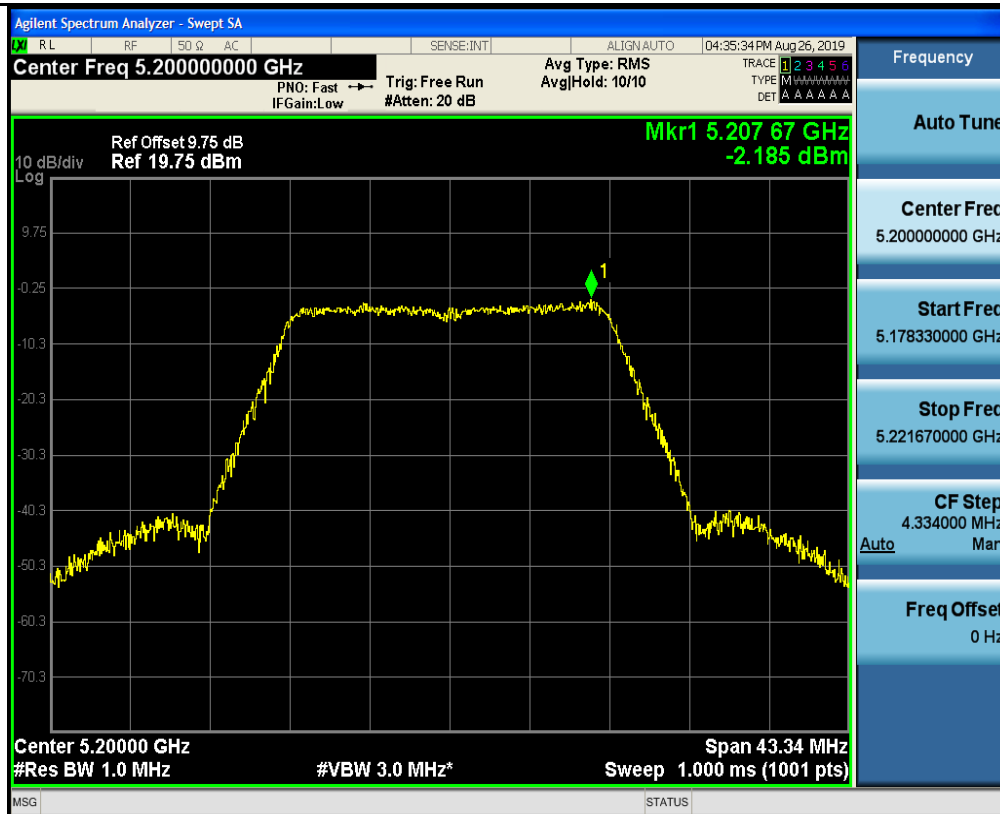


Mid

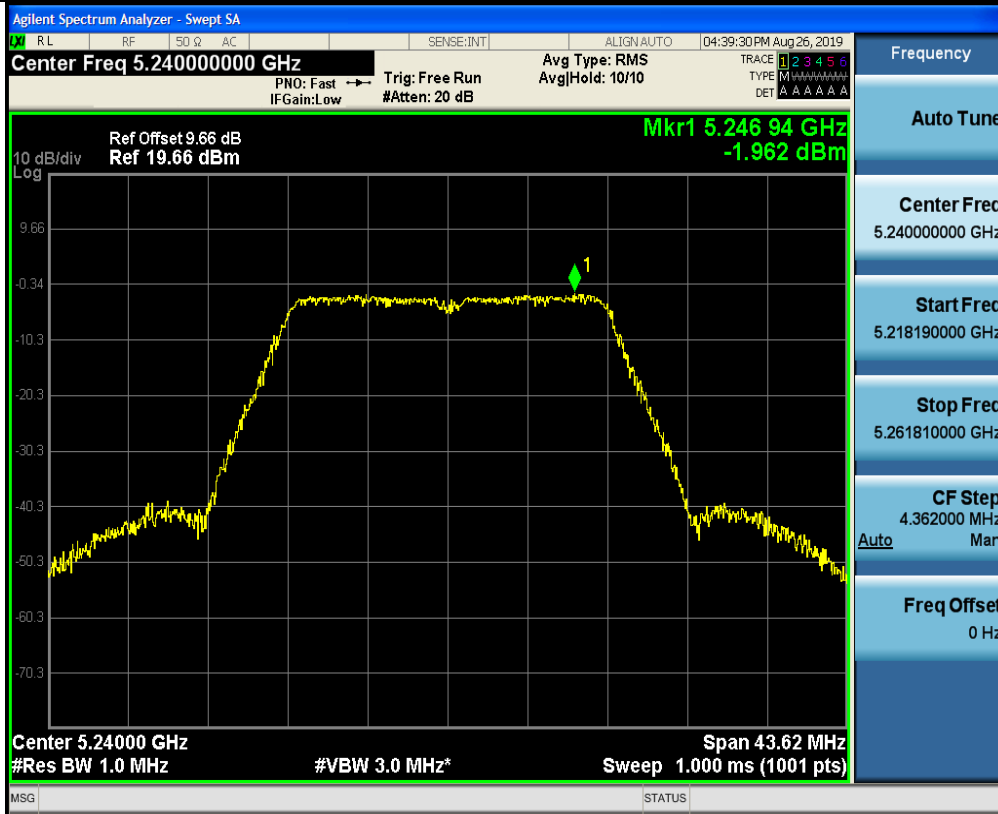


High


802.11ac(HT40)

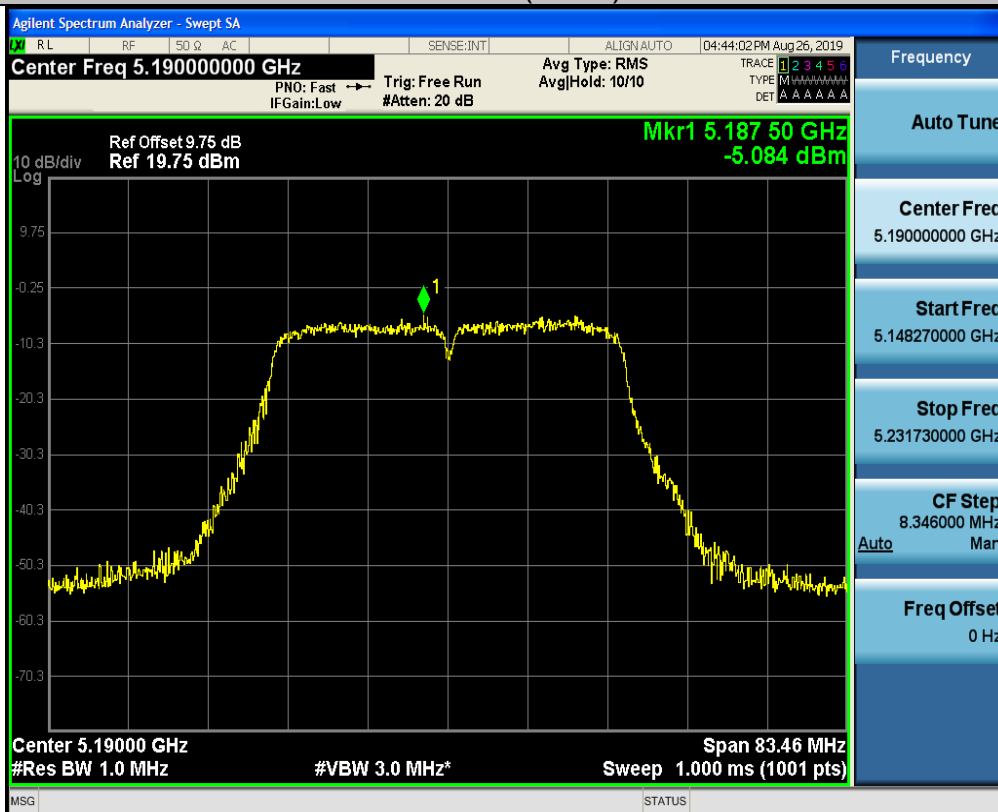

Low

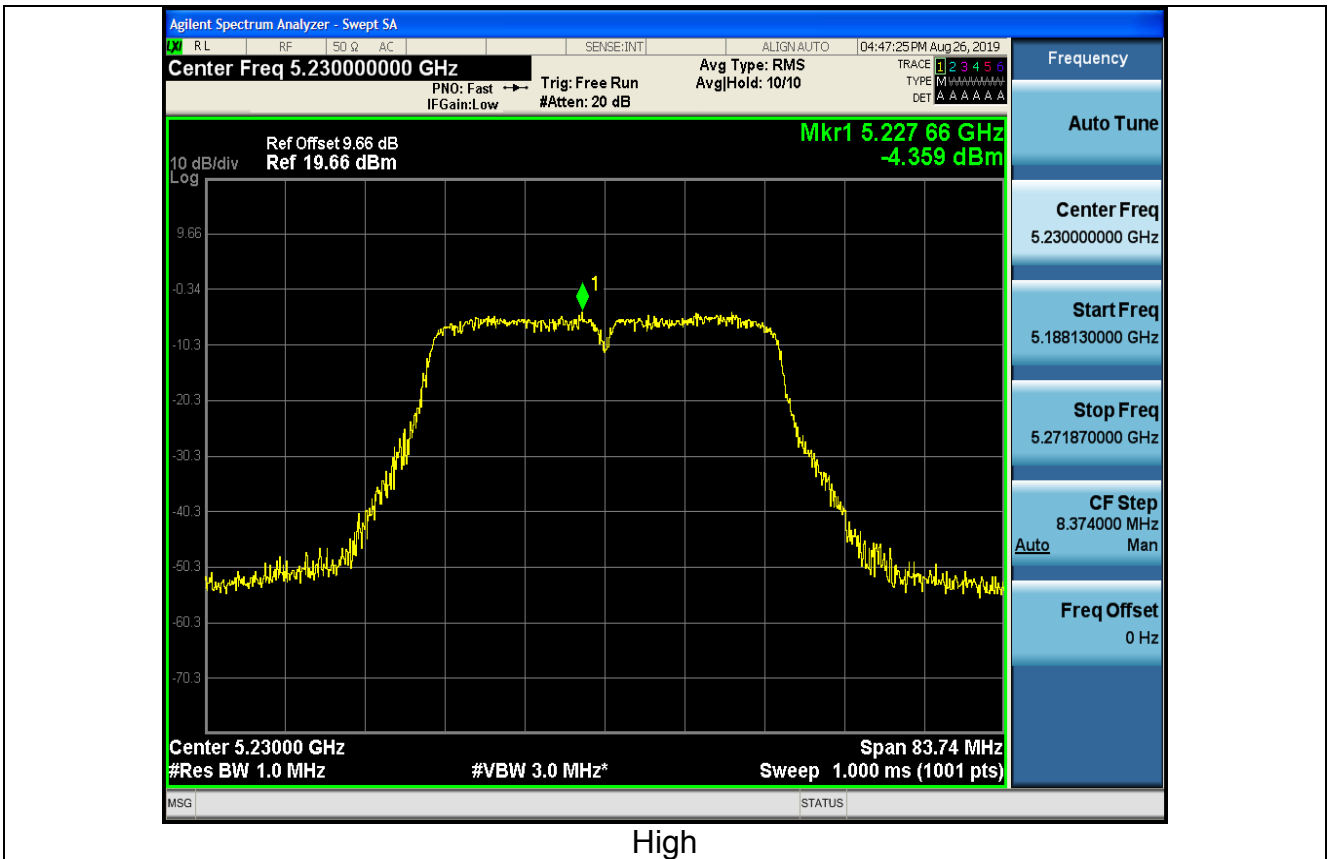


802.11ac(HT80)

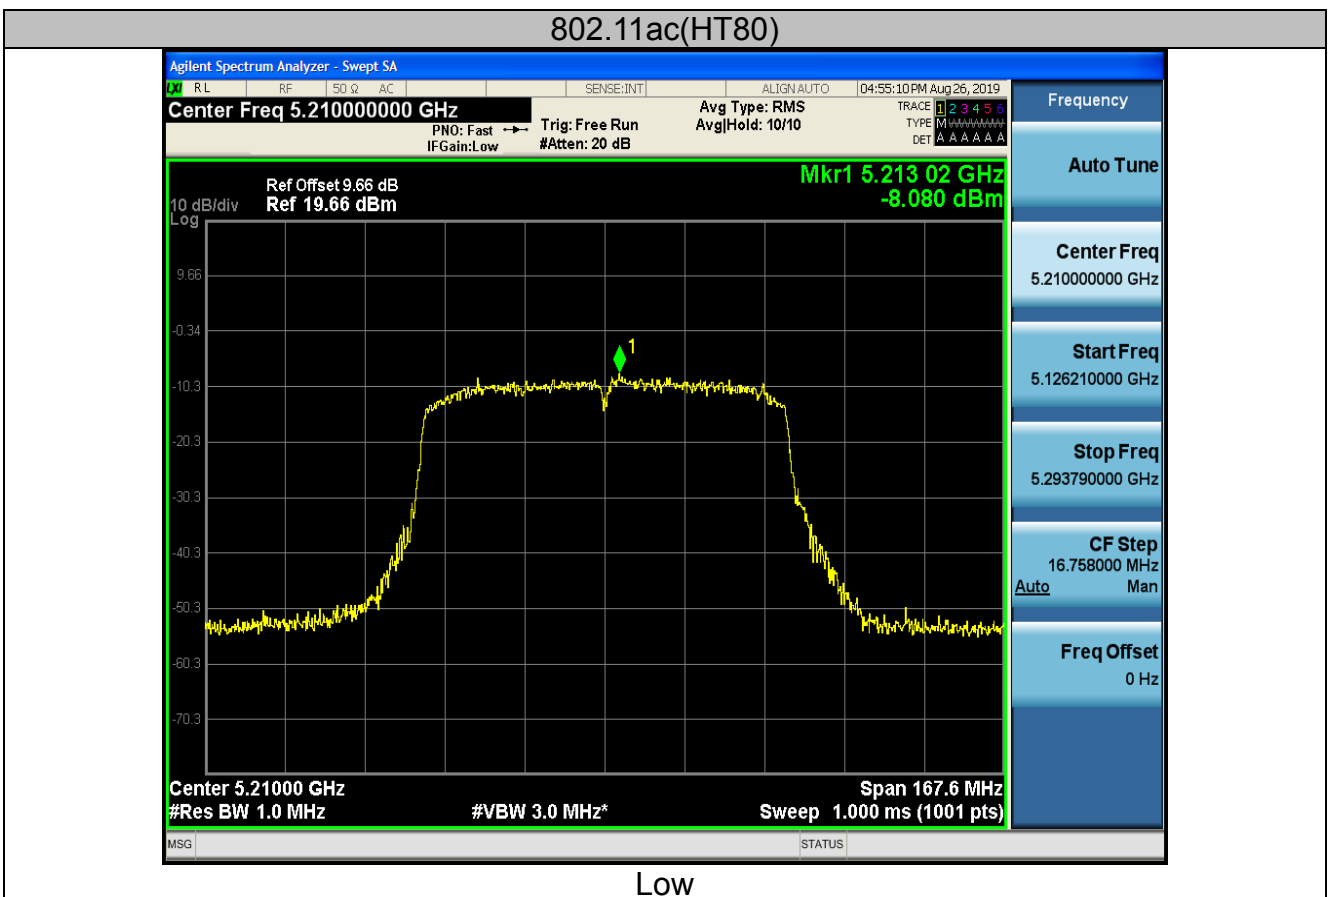



Band IV (5725 – 5850 MHz)

802.11a

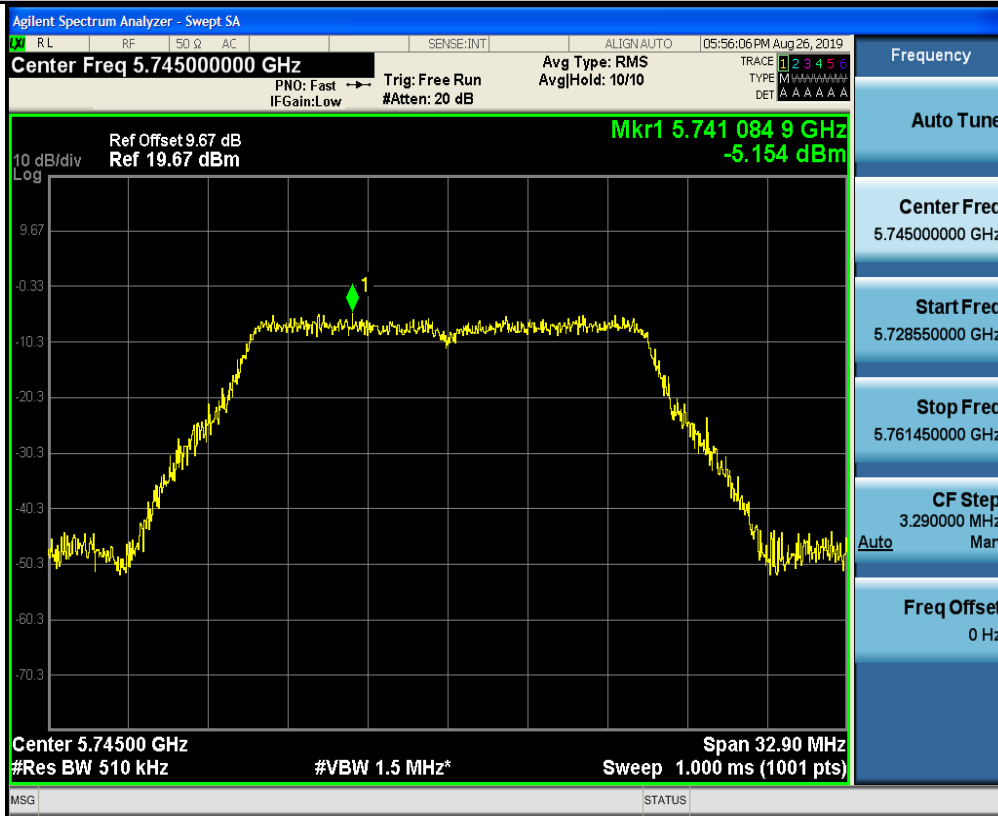

Low



Mid




High


802.11n(HT20)



Low

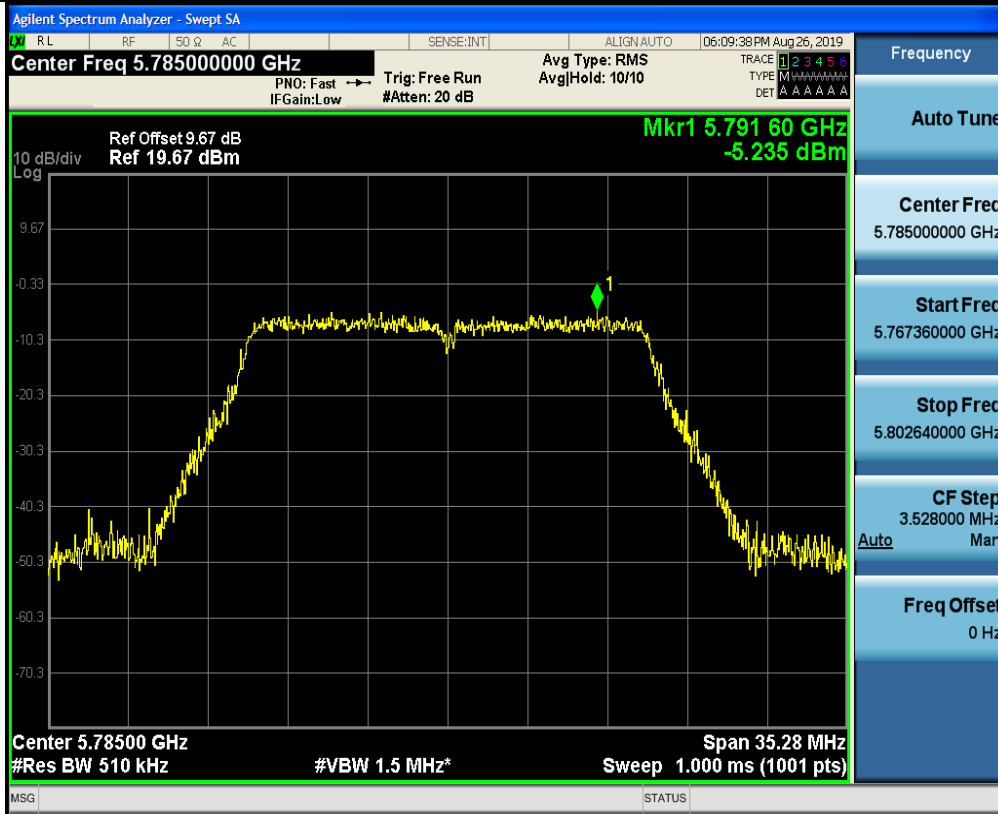


Mid

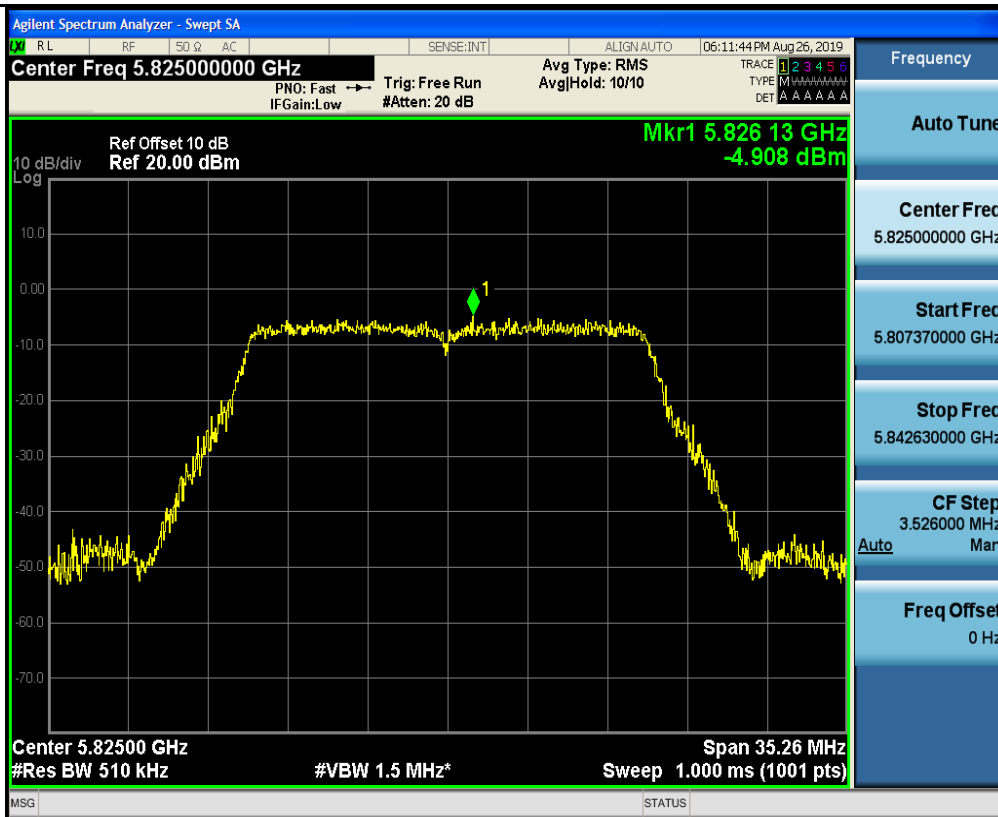


High



802.11n(HT40)

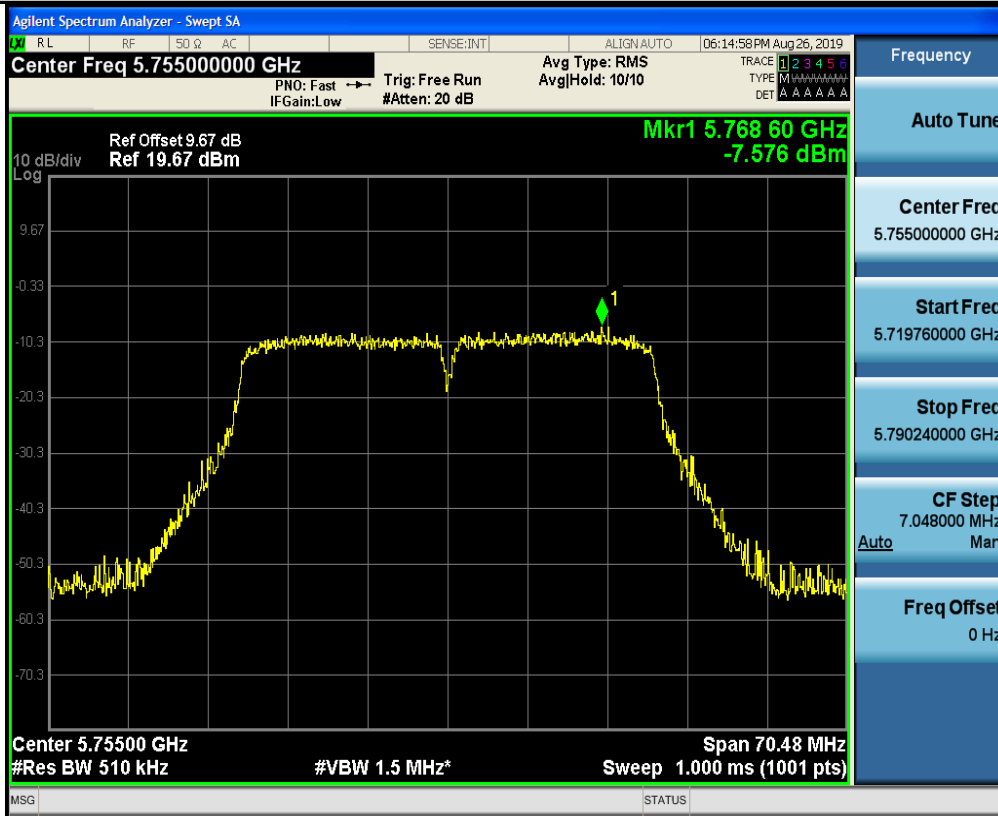


Low

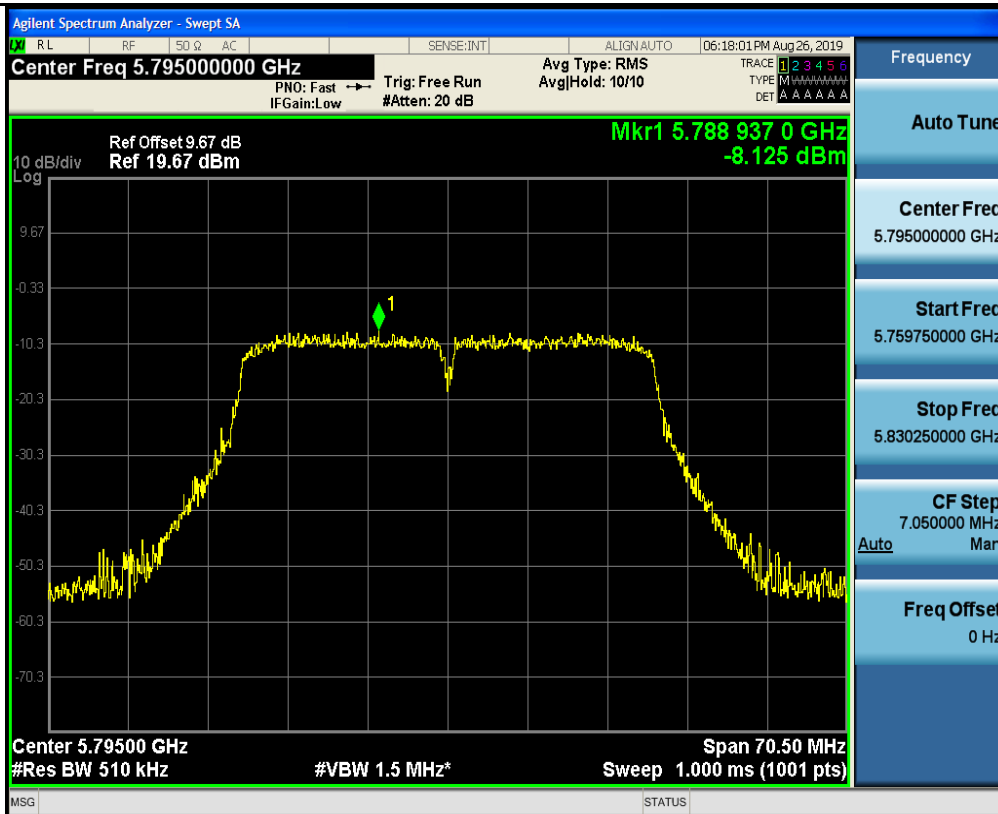


High


802.11ac(HT20)

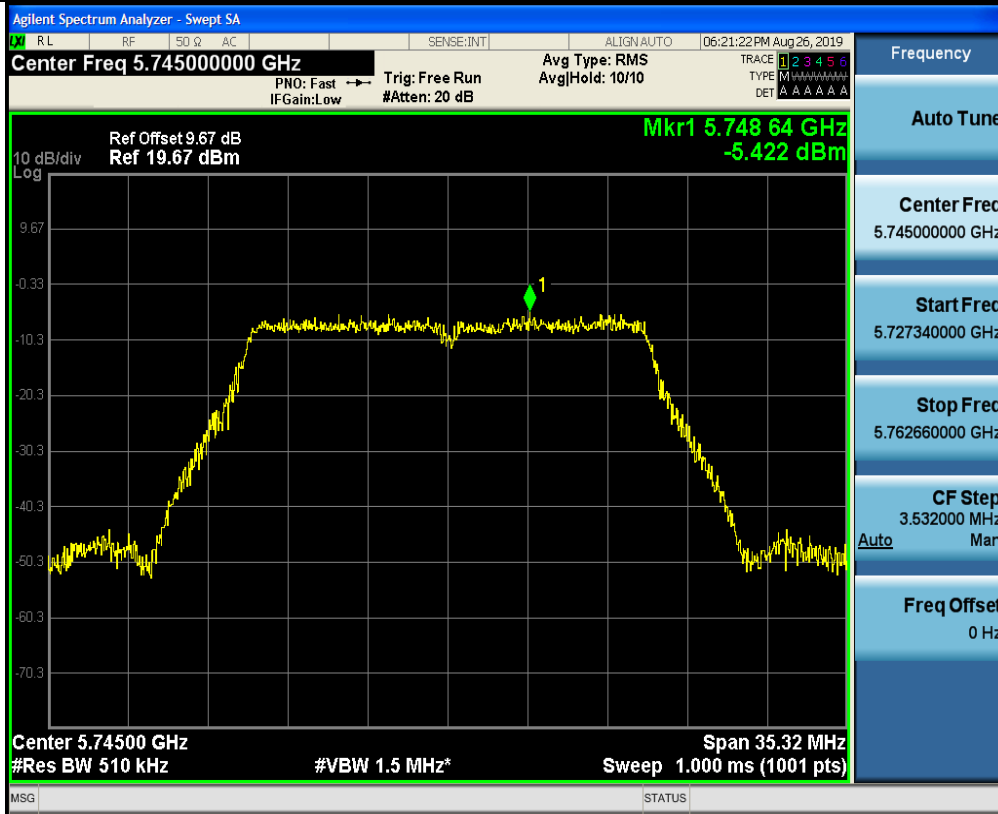


Low

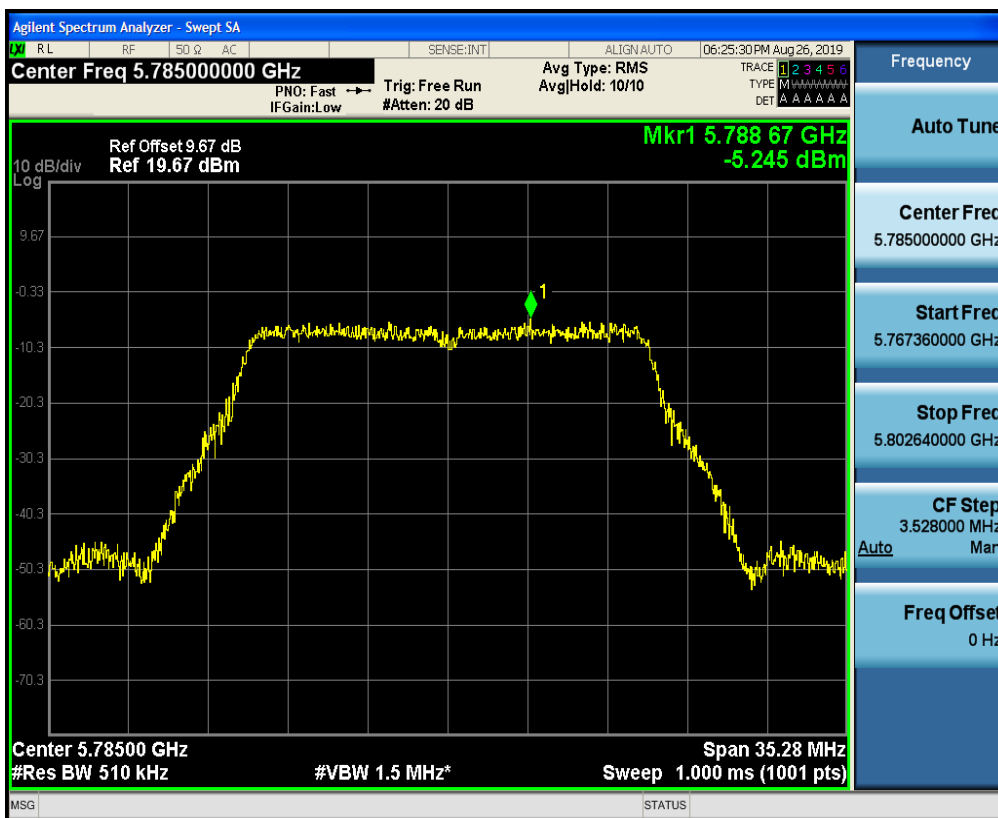


Mid

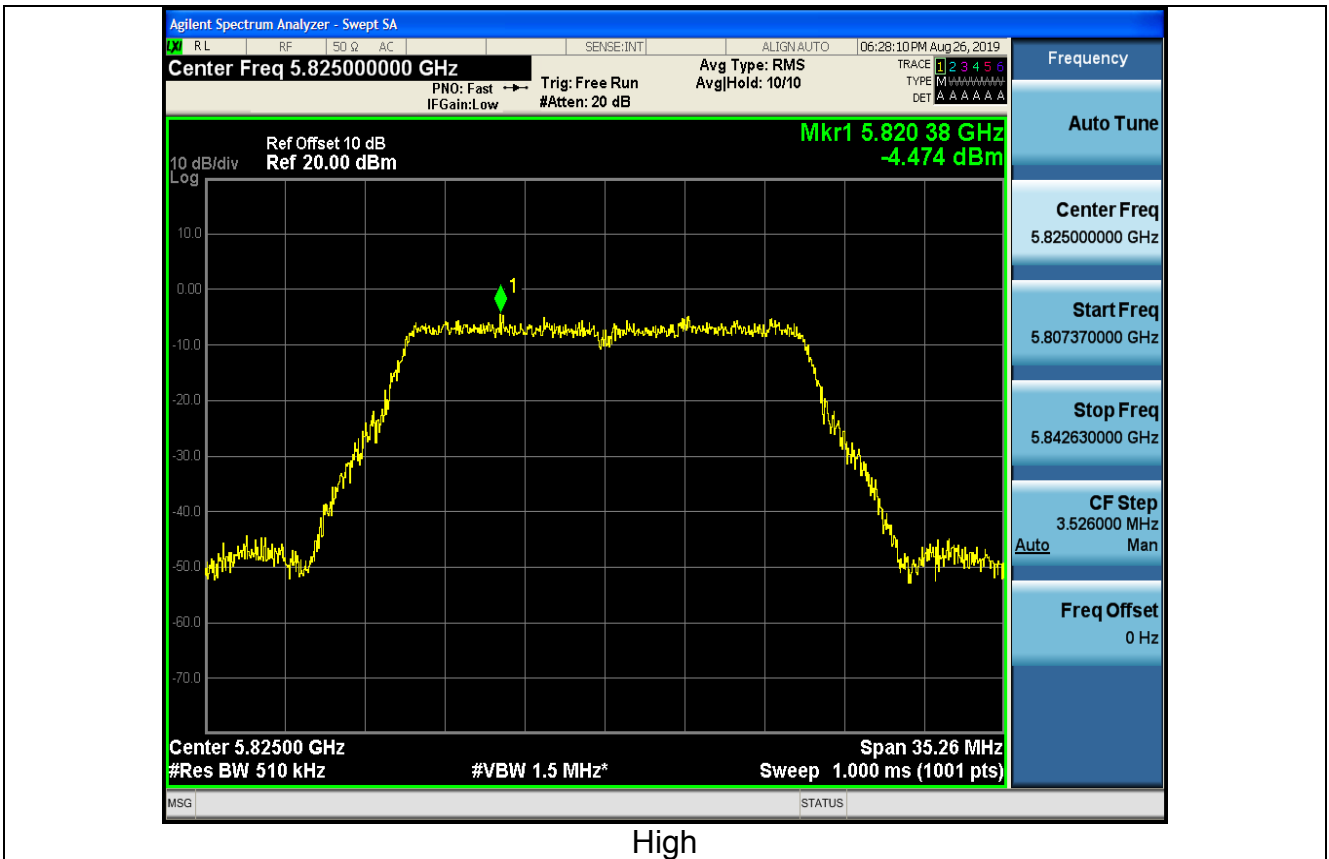


802.11ac(HT40)

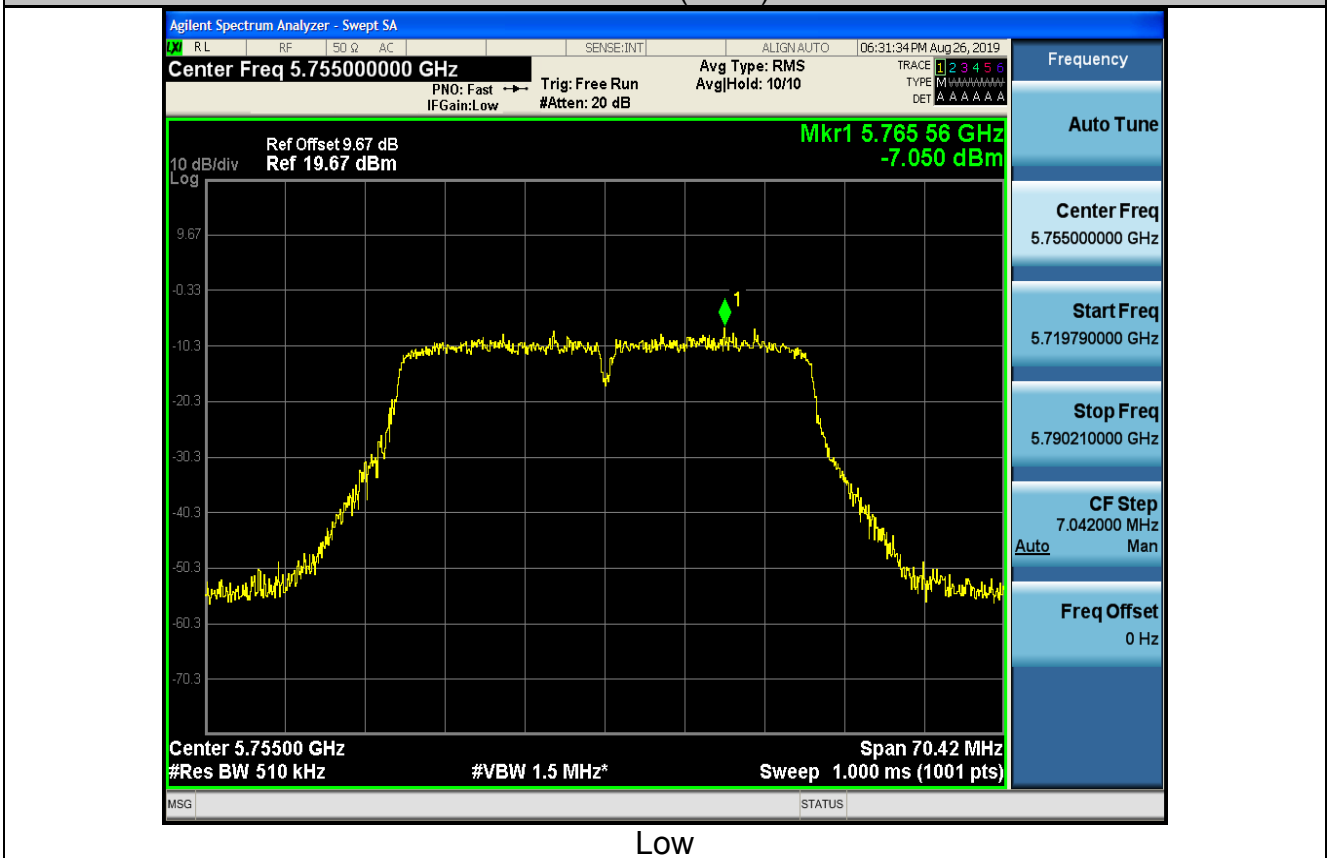

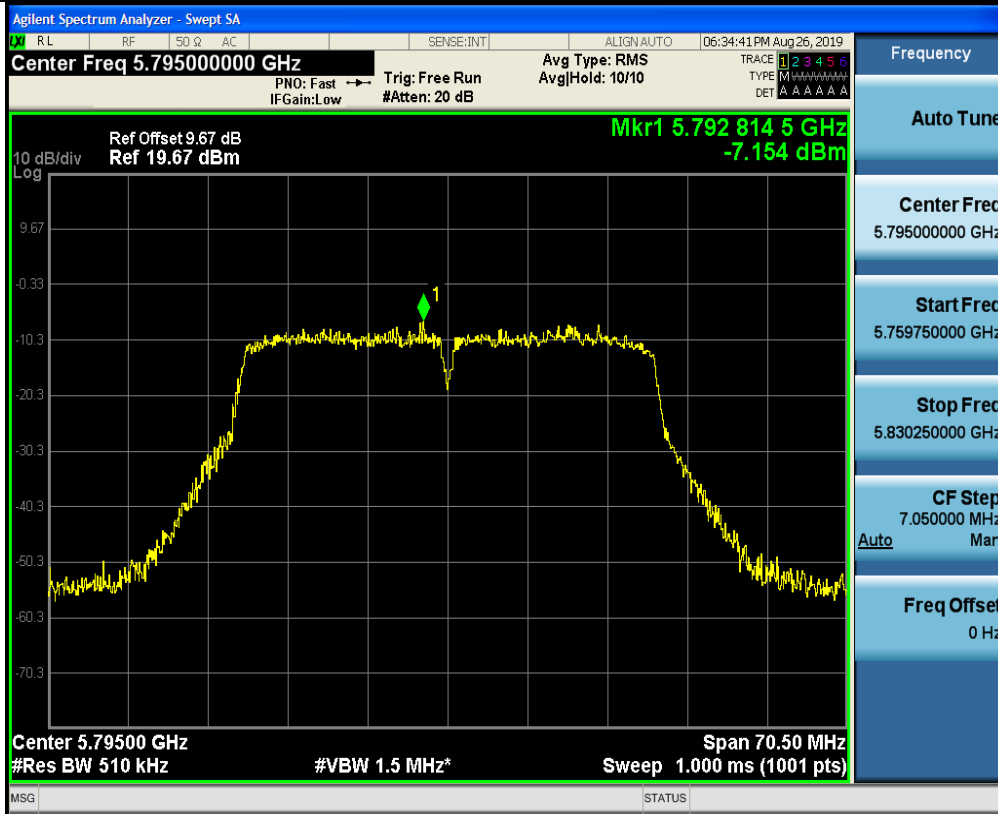

High
802.11ac(HT80)

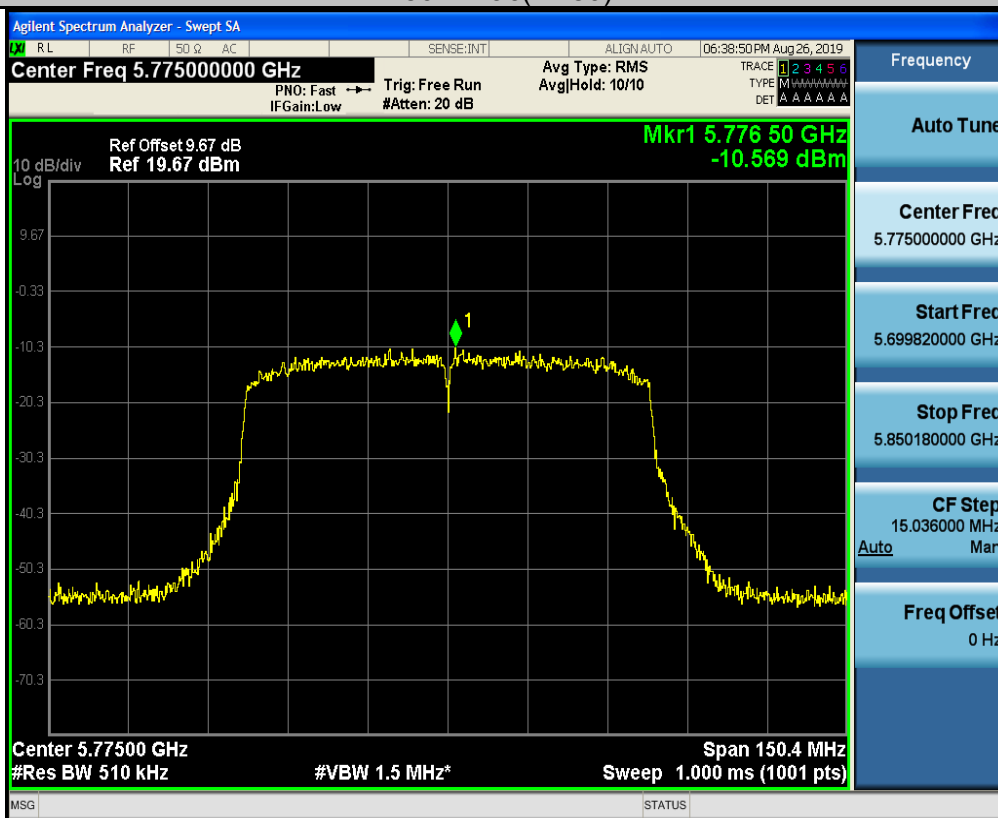

Low



4.6. Band edge

4.6.1. Test Specification

Test Requirement:	FCC CFR47 Part 15E Section 15.407
Test Method:	ANSI C63.10 2013
Limit:	<p>For band I&II&III: $E[\text{dB}\mu\text{V}/\text{m}] = \text{EIRP}[\text{dBm}] + 95.2 = 68.2 \text{ dB}\mu\text{V}/\text{m}$, for $\text{EIRP}(\text{dBm}) = -27\text{dBm}$</p> <p>For transmitters operating in the 5.725-5.85 GHz band:</p> <p>All emissions shall be limited to a level of $-27 \text{ dBm}/\text{MHz}$ at 75 MHz or more above or below the band edge increasing linearly to $10 \text{ dBm}/\text{MHz}$ at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of $15.6 \text{ dBm}/\text{MHz}$ at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of $27 \text{ dBm}/\text{MHz}$ at the band edge.</p> <p>For band IV(5715-5725MHz&5850-5860MHz): $E[\text{dB}\mu\text{V}/\text{m}] = \text{EIRP}[\text{dBm}] + 95.2 = 78.2 \text{ dB}\mu\text{V}/\text{m}$, for $\text{EIRP}(\text{dBm}) = -27\text{dBm}$;</p> <p>For band IV(other un-restricted band): $E[\text{dB}\mu\text{V}/\text{m}] = \text{EIRP}[\text{dBm}] + 95.2 = 68.2 \text{ dB}\mu\text{V}/\text{m}$, for $\text{EIRP}(\text{dBm}) = -27\text{dBm}$</p>
Test Setup:	
Test Mode:	Transmitting mode with modulation
Test Procedure:	<ol style="list-style-type: none"> 1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the



	<p>maximum reading.</p> <p>5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasipeak or average method as specified and then reported in a data sheet.</p>
Test Result:	PASS



4.6.2. Test Instruments

Radiated Emission Test Site (966)				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Receiver	R&S	ESRP3	HKE-005	Dec. 27, 2019
Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 27, 2019
Preamplifier	EMCI	EMC051845S E	HKE-015	Dec. 27, 2019
Preamplifier	Agilent	83051A	HKE-016	Dec. 27, 2019
Loop antenna	Schwarzbeck	FMZB 1519 B	HKE-014	Dec. 26, 2019
Broadband antenna	Schwarzbeck	VULB 9163	HKE-012	Dec. 26, 2019
Horn antenna	Schwarzbeck	9120D	HKE-013	Dec. 26, 2019
Antenna Mast	Keleto	CC-A-4M	N/A	N/A
Position controller	Taiwan MF	MF7802	HKE-011	Dec. 27, 2019
Radiated test software	Tonscend	TS+ Rev 2.5.0.0	HKE-082	N/A
RF cable (9KHz-1GHz)	Times	381806-001	N/A	N/A
Hf antenna	Schwarzbeck	LB-180400-KF	HKE-031	Dec. 27, 2019
RF cable	Tonscend	1-18G	HKE-099	Dec. 27, 2019
RF cable	Times	1-40G	HKE-034	Dec. 27, 2019

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).



4.6.3. Test Data

Radiated Band Edge Test:

Operation Mode: 802.11a Mode with 5.2G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5150	52.17	-2.49	49.68	74	-24.32	peak
5150	/	-2.49	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5150	51.59	-2.49	49.1	74	-24.9	peak
5150	/	-2.49	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: TX CH High with 5.2G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5250	54.16	-2.28	51.88	74	-22.12	peak
5250	/	-2.28	/	54	/	AVG
5350	51.78	-2.11	49.67	74	-24.33	peak
5350	/	-2.11	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5250	52.48	-2.28	50.2	74	-23.8	peak
5250	/	-2.28	/	54	/	AVG
5350	51.07	-2.11	48.96	74	-25.04	peak
5350	/	-2.11	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: 802.11n20 Mode with 5.2G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5150	54.64	-2.49	52.15	74	-21.85	peak
5150	/	-2.49	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5150	51.49	-2.49	49	74	-25	peak
5150	/	-2.49	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: TX CH High with 5.2G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5250	51.52	-2.28	49.24	74	-24.76	peak
5250	/	-2.28	/	54	/	AVG
5350	50.37	-2.11	48.26	74	-25.74	peak
5350	/	-2.11	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5250	54.23	-2.28	51.95	74	-22.05	peak
5250	/	-2.28	/	54	/	AVG
5350	50.75	-2.11	48.64	74	-25.36	peak
5350	/	-2.11	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: 802.11 n40 Mode with 5.2G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5150	52.15	-2.49	49.66	74	-24.34	peak
5150	/	-2.49	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5150	51.07	-2.49	48.58	74	-25.42	peak
5150	/	-2.49	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: TX CH High with 5.2G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5250	52.16	-2.28	49.88	74	-24.12	peak
5250	/	-2.28	/	54	/	AVG
5350	49.22	-2.11	47.11	74	-26.89	peak
5350	/	-2.11	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5250	52.36	-2.28	50.08	74	-23.92	peak
5250	/	-2.28	/	54	/	AVG
5350	49.15	-2.11	47.04	74	-26.96	peak
5350	/	-2.11	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: 802.11 ac20 Mode with 5.2G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5150	54.22	-2.49	51.73	74	-22.27	peak
5150	/	-2.49	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5150	52.36	-2.49	49.87	74	-24.13	peak
5150	/	-2.49	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: TX CH High with 5.2G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5250	54.46	-2.28	52.18	74	-21.82	peak
5250	/	-2.28	/	54	/	AVG
5350	53.09	-2.11	50.98	74	-23.02	peak
5350	/	-2.11	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5250	53.45	-2.28	51.17	74	-22.83	peak
5250	/	-2.28	/	54	/	AVG
5350	51.96	-2.11	49.85	74	-24.15	peak
5350	/	-2.11	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: 802.11 ac40 Mode with 5.2G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5150	53.45	-2.49	50.96	74	-23.04	peak
5150	/	-2.49	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5150	51.25	-2.49	48.76	74	-25.24	peak
5150	/	-2.49	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: TX CH High with 5.2G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5250	54.45	-2.28	52.17	74	-21.83	peak
5250	/	-2.28	/	54	/	AVG
5350	51.77	-2.11	49.66	74	-24.34	peak
5350	/	-2.11	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5250	53.27	-2.28	50.99	74	-23.01	peak
5250	/	-2.28	/	54	/	AVG
5350	49.46	-2.11	47.35	74	-26.65	peak
5350	/	-2.11	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: 802.11 ac80 Mode with 5.2G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5150	53.22	-2.49	50.73	74	-23.27	peak
5150	/	-2.49	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5150	51.66	-2.49	49.17	74	-24.83	peak
5150	/	-2.49	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: TX CH High with 5.2G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5250	53.52	-2.28	51.24	74	-22.76	peak
5250	/	-2.28	/	54	/	AVG
5350	50.15	-2.11	48.04	74	-25.96	peak
5350	/	-2.11	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5250	53.13	-2.28	50.85	74	-23.15	peak
5250	/	-2.28	/	54	/	AVG
5350	49.45	-2.11	47.34	74	-26.66	peak
5350	/	-2.11	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: 802.11a Mode with 5.8G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5650	57.42	-2.06	55.36	68.2	-12.84	peak
5650	35.1	-2.06	33.04	48.2	-15.16	AVG
5700	91.36	-1.96	89.4	105.2	-15.8	peak
5700	65.78	-1.96	63.82	85.2	-21.38	AVG
5720	93.15	-2.87	90.28	110.8	-20.52	peak
5720	73.92	-2.87	71.05	90.8	-19.75	AVG
5725	111.02	-2.14	108.88	122.2	-13.32	peak
5725	90.56	-2.14	88.42	102.2	-13.78	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5650	59.71	-2.06	57.65	68.2	-10.55	peak
5650	36.36	-2.06	34.3	48.2	-13.9	AVG
5700	90.25	-1.96	88.29	105.2	-16.91	peak
5700	65.14	-1.96	63.18	85.2	-22.02	AVG
5720	94.49	-2.87	91.62	110.8	-19.18	peak
5720	72.21	-2.87	69.34	90.8	-21.46	AVG
5725	112.06	-2.14	109.92	122.2	-12.28	peak
5725	88.75	-2.14	86.61	102.2	-15.59	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: TX CH High with 5.8G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5850	113.56	-1.97	111.59	122.2	-10.61	peak
5850	87.17	-1.97	85.2	102.2	-17	AVG
5855	94.68	-2.13	92.55	110.8	-18.25	peak
5855	73.32	-2.13	71.19	90.8	-19.61	AVG
5875	86.25	-2.65	83.6	105.2	-21.6	peak
5875	68.08	-2.65	65.43	85.2	-19.77	AVG
5925	53.46	-2.28	51.18	68.2	-17.02	peak
5925	37.66	-2.28	35.38	48.2	-12.82	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5850	112.52	-1.97	110.55	122.2	-11.65	peak
5850	90.26	-1.97	88.29	102.2	-13.91	AVG
5855	93.75	-2.13	91.62	110.8	-19.18	peak
5855	76.15	-2.13	74.02	90.8	-16.78	AVG
5875	86.22	-2.65	83.57	105.2	-21.63	peak
5875	68.45	-2.65	65.8	85.2	-19.4	AVG
5925	55.88	-2.28	53.6	68.2	-14.6	peak
5925	37.23	-2.28	34.95	48.2	-13.25	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: 802.11n20 Mode with 5.8G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5650	57.14	-2.06	55.08	68.2	-13.12	peak
5650	37.85	-2.06	35.79	48.2	-12.41	AVG
5700	92.45	-1.96	90.49	105.2	-14.71	peak
5700	68.12	-1.96	66.16	85.2	-19.04	AVG
5720	95.35	-2.87	92.48	110.8	-18.32	peak
5720	78.09	-2.87	75.22	90.8	-15.58	AVG
5725	112.63	-2.14	110.49	122.2	-11.71	peak
5725	89.47	-2.14	87.33	102.2	-14.87	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5650	61.43	-2.06	59.37	68.2	-8.83	peak
5650	35.69	-2.06	33.63	48.2	-14.57	AVG
5700	98.16	-1.96	96.2	105.2	-9	peak
5700	68.58	-1.96	66.62	85.2	-18.58	AVG
5720	93.35	-2.87	90.48	110.8	-20.32	peak
5720	72.45	-2.87	69.58	90.8	-21.22	AVG
5725	112.08	-2.14	109.94	122.2	-12.26	peak
5725	90.56	-2.14	88.42	102.2	-13.78	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: TX CH High with 5.8G
Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5850	112.75	-1.97	110.78	122.2	-11.42	peak
5850	88.63	-1.97	86.66	102.2	-15.54	AVG
5855	93.25	-2.13	91.12	110.8	-19.68	peak
5855	75.16	-2.13	73.03	90.8	-17.77	AVG
5875	86.28	-2.65	83.63	105.2	-21.57	peak
5875	65.11	-2.65	62.46	85.2	-22.74	AVG
5925	51.95	-2.28	49.67	68.2	-18.53	peak
5925	38.05	-2.28	35.77	48.2	-12.43	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5850	111.61	-1.97	109.64	122.2	-12.56	peak
5850	90.47	-1.97	88.5	102.2	-13.7	AVG
5855	94.25	-2.13	92.12	110.8	-18.68	peak
5855	75.64	-2.13	73.51	90.8	-17.29	AVG
5875	87.54	-2.65	84.89	105.2	-20.31	peak
5875	66.73	-2.65	64.08	85.2	-21.12	AVG
5925	57.22	-2.28	54.94	68.2	-13.26	peak
5925	38.82	-2.28	36.54	48.2	-11.66	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: 802.11n40 Mode with 5.8G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5650	57.68	-2.06	55.62	68.2	-12.58	peak
5650	35.15	-2.06	33.09	48.2	-15.11	AVG
5700	93.77	-1.96	91.81	105.2	-13.39	peak
5700	68.62	-1.96	66.66	85.2	-18.54	AVG
5720	95.36	-2.87	92.49	110.8	-18.31	peak
5720	75.78	-2.87	72.91	90.8	-17.89	AVG
5725	111.16	-2.14	109.02	122.2	-13.18	peak
5725	84.54	-2.14	82.4	102.2	-19.8	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5650	62.56	-2.06	60.5	68.2	-7.7	peak
5650	38.18	-2.06	36.12	48.2	-12.08	AVG
5700	96.42	-1.96	94.46	105.2	-10.74	peak
5700	67.85	-1.96	65.89	85.2	-19.31	AVG
5720	92.14	-2.87	89.27	110.8	-21.53	peak
5720	72.94	-2.87	70.07	90.8	-20.73	AVG
5725	112.23	-2.14	110.09	122.2	-12.11	peak
5725	88.47	-2.14	86.33	102.2	-15.87	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: TX CH High with 5.8G
Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5850	111.41	-1.97	109.44	122.2	-12.76	peak
5850	87.68	-1.97	85.71	102.2	-16.49	AVG
5855	94.35	-2.13	92.22	110.8	-18.58	peak
5855	77.42	-2.13	75.29	90.8	-15.51	AVG
5875	87.01	-2.65	84.36	105.2	-20.84	peak
5875	67.23	-2.65	64.58	85.2	-20.62	AVG
5925	54.59	-2.28	52.31	68.2	-15.89	peak
5925	37.74	-2.28	35.46	48.2	-12.74	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5850	110.98	-1.97	109.01	122.2	-13.19	peak
5850	87.59	-1.97	85.62	102.2	-16.58	AVG
5855	92.26	-2.13	90.13	110.8	-20.67	peak
5855	74.06	-2.13	71.93	90.8	-18.87	AVG
5875	87.74	-2.65	85.09	105.2	-20.11	peak
5875	65.26	-2.65	62.61	85.2	-22.59	AVG
5925	53.38	-2.28	51.1	68.2	-17.1	peak
5925	38.74	-2.28	36.46	48.2	-11.74	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: 802.11ac20 Mode with 5.8G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5650	57.64	-2.06	55.58	68.2	-12.62	peak
5650	34.18	-2.06	32.12	48.2	-16.08	AVG
5700	90.63	-1.96	88.67	105.2	-16.53	peak
5700	67.22	-1.96	65.26	85.2	-19.94	AVG
5720	93.48	-2.87	90.61	110.8	-20.19	peak
5720	73.58	-2.87	70.71	90.8	-20.09	AVG
5725	111.16	-2.14	109.02	122.2	-13.18	peak
5725	87.21	-2.14	85.07	102.2	-17.13	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5650	60.63	-2.06	58.57	68.2	-9.63	peak
5650	36.12	-2.06	34.06	48.2	-14.14	AVG
5700	91.45	-1.96	89.49	105.2	-15.71	peak
5700	65.36	-1.96	63.4	85.2	-21.8	AVG
5720	95.58	-2.87	92.71	110.8	-18.09	peak
5720	72.13	-2.87	69.26	90.8	-21.54	AVG
5725	112.05	-2.14	109.91	122.2	-12.29	peak
5725	87.66	-2.14	85.52	102.2	-16.68	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: TX CH High with 5.8G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5850	112.52	-1.97	110.55	122.2	-11.65	peak
5850	89.05	-1.97	87.08	102.2	-15.12	AVG
5855	96.35	-2.13	94.22	110.8	-16.58	peak
5855	77.17	-2.13	75.04	90.8	-15.76	AVG
5875	87.96	-2.65	85.31	105.2	-19.89	peak
5875	65.34	-2.65	62.69	85.2	-22.51	AVG
5925	54.68	-2.28	52.4	68.2	-15.8	peak
5925	35.24	-2.28	32.96	48.2	-15.24	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5850	112.14	-1.97	110.17	122.2	-12.03	peak
5850	88.52	-1.97	86.55	102.2	-15.65	AVG
5855	93.92	-2.13	91.79	110.8	-19.01	peak
5855	74.36	-2.13	72.23	90.8	-18.57	AVG
5875	85.49	-2.65	82.84	105.2	-22.36	peak
5875	65.05	-2.65	62.4	85.2	-22.8	AVG
5925	54.11	-2.28	51.83	68.2	-16.37	peak
5925	35.24	-2.28	32.96	48.2	-15.24	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: 802.11ac40 Mode with 5.8G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5650	58.45	-2.06	56.39	68.2	-11.81	peak
5650	37.28	-2.06	35.22	48.2	-12.98	AVG
5700	90.63	-1.96	88.67	105.2	-16.53	peak
5700	67.74	-1.96	65.78	85.2	-19.42	AVG
5720	91.02	-2.87	88.15	110.8	-22.65	peak
5720	75.36	-2.87	72.49	90.8	-18.31	AVG
5725	110.48	-2.14	108.34	122.2	-13.86	peak
5725	87.18	-2.14	85.04	102.2	-17.16	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5650	58.59	-2.06	56.53	68.2	-11.67	peak
5650	37.14	-2.06	35.08	48.2	-13.12	AVG
5700	90.25	-1.96	88.29	105.2	-16.91	peak
5700	71.75	-1.96	69.79	85.2	-15.41	AVG
5720	96.45	-2.87	93.58	110.8	-17.22	peak
5720	82.66	-2.87	79.79	90.8	-11.01	AVG
5725	112.35	-2.14	110.21	122.2	-11.99	peak
5725	89.17	-2.14	87.03	102.2	-15.17	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: TX CH High with 5.8G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5850	113.14	-1.97	111.17	122.2	-11.03	peak
5850	87.22	-1.97	85.25	102.2	-16.95	AVG
5855	94.58	-2.13	92.45	110.8	-18.35	peak
5855	71.69	-2.13	69.56	90.8	-21.24	AVG
5875	87.34	-2.65	84.69	105.2	-20.51	peak
5875	64.07	-2.65	61.42	85.2	-23.78	AVG
5925	52.95	-2.28	50.67	68.2	-17.53	peak
5925	35.42	-2.28	33.14	48.2	-15.06	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5850	113.77	-1.97	111.8	122.2	-10.4	peak
5850	88.65	-1.97	86.68	102.2	-15.52	AVG
5855	92.32	-2.13	90.19	110.8	-20.61	peak
5855	74.45	-2.13	72.32	90.8	-18.48	AVG
5875	86.96	-2.65	84.31	105.2	-20.89	peak
5875	66.28	-2.65	63.63	85.2	-21.57	AVG
5925	55.59	-2.28	53.31	68.2	-14.89	peak
5925	36.17	-2.28	33.89	48.2	-14.31	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: 802.11ac80 Mode with 5.8G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5650	58.15	-2.06	56.09	68.2	-12.11	peak
5650	36.63	-2.06	34.57	48.2	-13.63	AVG
5700	90.78	-1.96	88.82	105.2	-16.38	peak
5700	67.22	-1.96	65.26	85.2	-19.94	AVG
5720	91.08	-2.87	88.21	110.8	-22.59	peak
5720	75.13	-2.87	72.26	90.8	-18.54	AVG
5725	111.87	-2.14	109.73	122.2	-12.47	peak
5725	88.16	-2.14	86.02	102.2	-16.18	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5650	60.34	-2.06	58.28	68.2	-9.92	peak
5650	36.15	-2.06	34.09	48.2	-14.11	AVG
5700	90.02	-1.96	88.06	105.2	-17.14	peak
5700	65.75	-1.96	63.79	85.2	-21.41	AVG
5720	95.56	-2.87	92.69	110.8	-18.11	peak
5720	76.18	-2.87	73.31	90.8	-17.49	AVG
5725	113.32	-2.14	111.18	122.2	-11.02	peak
5725	85.63	-2.14	83.49	102.2	-18.71	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: TX CH High with 5.8G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5850	112.53	-1.97	110.56	122.2	-11.64	peak
5850	89.59	-1.97	87.62	102.2	-14.58	AVG
5855	95.63	-2.13	93.5	110.8	-17.3	peak
5855	76.05	-2.13	73.92	90.8	-16.88	AVG
5875	87.16	-2.65	84.51	105.2	-20.69	peak
5875	65.49	-2.65	62.84	85.2	-22.36	AVG
5925	53.37	-2.28	51.09	68.2	-17.11	peak
5925	37.24	-2.28	34.96	48.2	-13.24	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
5850	111.16	-1.97	109.19	122.2	-13.01	peak
5850	87.79	-1.97	85.82	102.2	-16.38	AVG
5855	93.24	-2.13	91.11	110.8	-19.69	peak
5855	74.63	-2.13	72.5	90.8	-18.3	AVG
5875	86.28	-2.65	83.63	105.2	-21.57	peak
5875	66.01	-2.65	63.36	85.2	-21.84	AVG
5925	54.22	-2.28	51.94	68.2	-16.26	peak
5925	36.54	-2.28	34.26	48.2	-13.94	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



4.7. Spurious Emission

4.7.1.1. Test Specification

Test Requirement:	FCC CFR47 Part 15 Section 15.407 & 15.209 & 15.205				
Test Method:	KDB 789033 D02 v02r01				
Frequency Range:	9kHz to 40GHz				
Measurement Distance:	3 m				
Antenna Polarization:	Horizontal & Vertical				
Operation mode:	Transmitting mode with modulation				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	9kHz- 150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value
	150kHz- 30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value
	30MHz-1GHz	Quasi-peak	100kHz	300kHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		Peak	1MHz	10Hz	Average Value
Limit:	Unwanted spurious emissions fallen in restricted bands per FCC Part15.205 shall comply with the general field strength limits set forth in § 15.209 as below table,				
	Frequency	Field Strength (microvolts/meter)	Measurement Distance (meters)		
	0.009-0.490	2400/F(KHz)	300		
	0.490-1.705	24000/F(KHz)	30		
	1.705-30	30	30		
	30-88	100	3		
	88-216	150	3		
	216-960	200	3		
	Above 960	500	3		
	Frequency	Limit (dBuV/m @3m)	Detector		
Above 1G	74.0	Peak			
	54.0	Average			
Test setup:	For radiated emissions below 30MHz				
	<p>Distance = 3m</p> <p>EUT</p> <p>Turn table</p> <p>Ground Plane</p> <p>Pre -Amplifier</p> <p>Receiver</p> <p>Computer</p>				
	30MHz to 1GHz				


	<p>Above 1GHz</p>
<p>Test Procedure:</p>	<ol style="list-style-type: none"> 1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotating table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
<p>Test results:</p>	<p>PASS</p>



4.7.2. Test Data

All the test modes completed for test. only the worst result of AC 240V/60Hz (802.11a at 5180MHz) was reported Below 1GHz

Horizontal

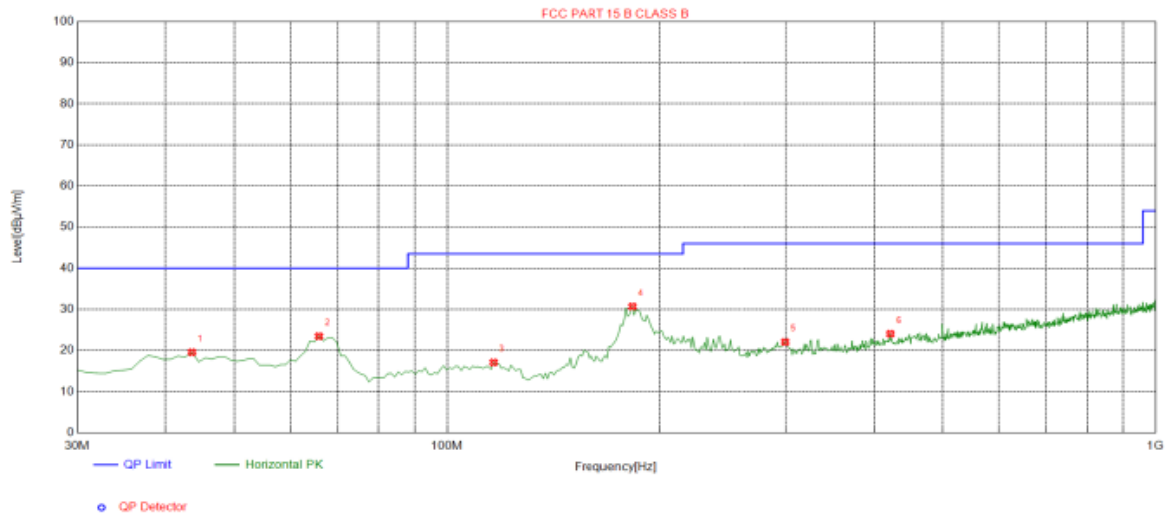


Suspected List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	43.5800	19.56	-13.90	40.00	20.44	100	31	Horizontal
2	65.8900	23.46	-16.64	40.00	16.54	100	23	Horizontal
3	116.330	17.09	-16.49	43.50	26.41	100	290	Horizontal
4	183.260	30.70	-16.58	43.50	12.80	100	349	Horizontal
5	299.660	22.05	-12.74	46.00	23.95	100	26	Horizontal
6	421.880	24.05	-10.00	46.00	21.95	100	113	Horizontal

Remark: Margin = Limit – Level
 Correction factor = Cable lose + LISN insertion loss
 Level=Test receiver reading + correction factor



Vertical

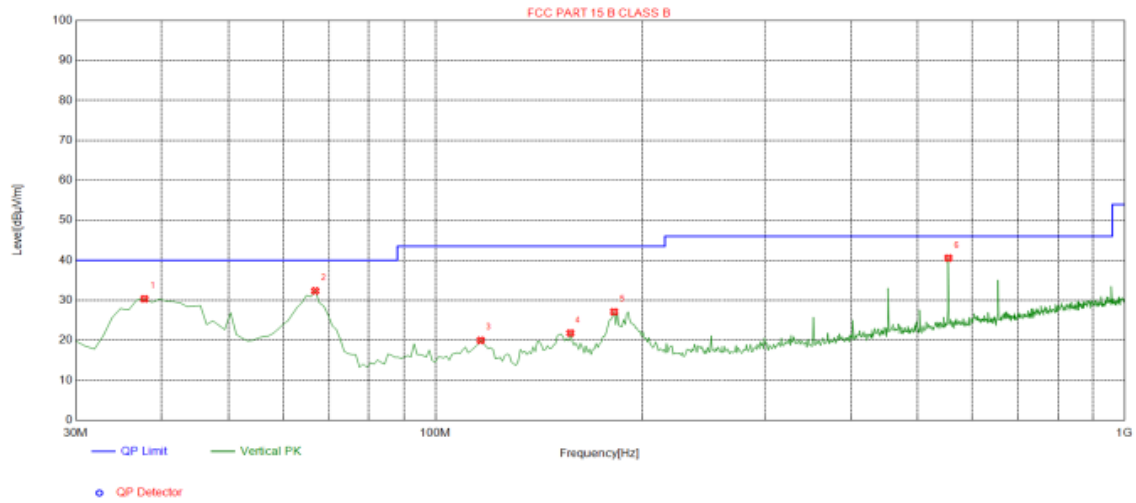

Suspected List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	37.7600	30.35	-15.26	40.00	9.65	100	123	Vertical
2	66.8600	32.36	-16.88	40.00	7.64	100	227	Vertical
3	116.330	19.98	-16.49	43.50	23.52	100	171	Vertical
4	157.070	21.81	-18.43	43.50	21.69	100	195	Vertical
5	182.290	27.12	-16.66	43.50	16.38	100	171	Vertical
6	554.770	40.55	-6.83	46.00	5.45	100	288	Vertical

Remark: Margin = Limit – Level
 Correction factor = Cable lose + LISN insertion loss
 Level=Test receiver reading + correction factor

**Above 1GHz**

LOW CH 36 (802.11 a Mode with 5.2G)/5180

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
3647	61.51	-4.59	56.92	74	-17.08	peak
3647	48.28	-4.59	43.69	54	-10.31	AVG
10360	52.47	3.74	56.21	74	-17.79	peak
10360	42.36	3.74	46.1	54	-7.9	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
3647	62.47	-4.59	57.88	74	-16.12	peak
3647	48.25	-4.59	43.66	54	-10.34	AVG
10360	51.36	3.74	55.1	74	-18.9	peak
10360	41.58	3.74	45.32	54	-8.68	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



MID CH40 (802.11 a Mode with 5.2G)/5200

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
3647	62.42	-4.59	57.83	74	-16.17	peak
3647	45.28	-4.59	40.69	54	-13.31	AVG
10400	54.06	3.74	57.8	74	-16.2	peak
10400	41.66	3.74	45.4	54	-8.6	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
3647	62.45	-4.59	57.86	74	-16.14	peak
3647	46.26	-4.59	41.67	54	-12.33	AVG
10400	53.89	3.74	57.63	74	-16.37	peak
10400	40.14	3.74	43.88	54	-10.12	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



HIGH CH 48 (802.11a Mode with 5.2G)/5240
Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
3647	62.08	-4.59	57.49	74	-16.51	peak
3647	47.38	-4.59	42.79	54	-11.21	AVG
10480	53.25	3.75	57	74	-17	peak
10480	41.74	3.75	45.49	54	-8.51	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
3647	61.22	-4.59	56.63	74	-17.37	peak
3647	45.35	-4.59	40.76	54	-13.24	AVG
10480	52.42	3.75	56.17	74	-17.83	peak
10480	40.06	3.75	43.81	54	-10.19	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Remark:

- (1) Measuring frequencies from 1 GHz to the 40 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.



LOW CH 149 (802.11 a Mode with 5.8G)/5745

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
3647	62.17	-4.59	57.58	74	-16.42	peak
3647	47.52	-4.59	42.93	54	-11.07	AVG
11570	55.63	4.21	59.84	74	-14.16	peak
11570	40.44	4.21	44.65	54	-9.35	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
3647	61.52	-4.59	56.93	74	-17.07	peak
3647	47.46	-4.59	42.87	54	-11.13	AVG
11570	53.14	4.21	57.35	74	-16.65	peak
11570	40.55	4.21	44.76	54	-9.24	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



MID CH157 (802.11 a Mode with 5.8G)/5785

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
3647	61.41	-4.59	56.82	74	-17.18	peak
3647	46.62	-4.59	42.03	54	-11.97	AVG
11570	54.32	4.21	58.53	74	-15.47	peak
11570	40.78	4.21	44.99	54	-9.01	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
3647	60.65	-4.59	56.06	74	-17.94	peak
3647	46.42	-4.59	41.83	54	-12.17	AVG
11570	53.13	4.21	57.34	74	-16.66	peak
11570	40.56	4.21	44.77	54	-9.23	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



HIGH CH 165 (802.11a Mode with 5.8G)/5825

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
3647	62.28	-4.59	57.69	74	-16.31	peak
3647	46.42	-4.59	41.83	54	-12.17	AVG
11650	54.27	4.84	59.11	74	-14.89	peak
11650	43.65	4.84	48.49	54	-5.51	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
3647	61.12	-4.59	56.53	74	-17.47	peak
3647	45.06	-4.59	40.47	54	-13.53	AVG
11650	55.66	4.84	60.5	74	-13.5	peak
11650	40.17	4.84	45.01	54	-8.99	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Remark:

- (1) Measuring frequencies from 1 GHz to the 40 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) Data of measurement within this frequency range shown "----" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.



4.8. Frequency Stability Measurement

4.8.1. Test Specification

Test Requirement:	FCC Part15 Section 15.407(g) &Part2 J Section 2.1055
Test Method:	ANSI C63.10: 2013
Limit:	The frequency tolerance shall be maintained within the band of operation frequency over a temperature variation of 0 degrees to 35 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.
Test Setup:	<pre> graph TD SA[Spectrum Analyzer] --- EUT[EUT] subgraph TC [Temperature Chamber] EUT end P[AC/DC Power supply] --- EUT </pre>
Test Procedure:	The EUT was placed inside the environmental test chamber and powered by nominal AC/DC voltage. b. Turn the EUT on and couple its output to a spectrum analyzer. c. Turn the EUT off and set the chamber to the highest temperature specified. d. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. e. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature. f. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.
Test Result:	PASS
Remark:	N/A



4.8.2. Test Instruments

RF Test Room				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 27, 2019
Temperature and humidity meter	Boyang	HTC-1	HKE-077	Dec. 27, 2019
programmable power supply	Agilent	E3646A	HKE-092	Dec. 27, 2019

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

**Test Result as follows:**

Mode	Voltage (V)	FHL (5180MHz)	Deviation (KHz)	FHH (5240MHz)	Deviation (KHz)
5.2G Band	4.2V	5179.978	22	5239.975	25
	3.8V	5179.969	31	5239.978	22
	3.4V	5179.973	27	5239.963	37

Mode	Temperature (°C)	FHL (5180MHz)	Deviation (KHz)	FHH (5240MHz)	Deviation (KHz)
5.2G Band	-30	5179.982	18	5239.965	35
	-20	5179.971	29	5239.970	30
	-10	5179.978	22	5239.968	32
	0	5179.985	15	5239.973	27
	10	5179.966	34	5239.980	20
	20	5179.983	17	5239.977	23
	30	5179.975	25	5239.969	31
	40	5179.974	26	5239.963	37
	50	5179.969	31	5239.975	25



Mode	Voltage (V)	FHL (5745MHz)	Deviation (KHz)	FHH (5825MHz)	Deviation (KHz)
5.8G Band	4.2V	5744.978	22	5824.980	20
	3.8V	5744.985	15	5824.973	27
	3.4V	5744.977	23	5824.976	24

Mode	Temperature (°C)	FHL (5745MHz)	Deviation (KHz)	FHH (5825MHz)	Deviation (KHz)
5.8G Band	-30	5744.965	35	5824.965	35
	-20	5744.971	29	5824.967	23
	-10	5744.969	31	5824.979	21
	0	5744.972	28	5824.983	27
	10	5744.981	19	5824.967	34
	20	5744.977	23	5824.963	37
	30	5744.969	31	5824.985	15
	40	5744.972	28	5824.974	26
	50	5744.974	26	5824.981	19

4.9. ANTENNA REQUIREMENT

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.


Refer to statement below for compliance.

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

Antenna Connected Construction

The antenna used in this product is a Internal Antenna, The directional gains of antenna used for transmitting is 2dBi.

WIFI ANTENNA

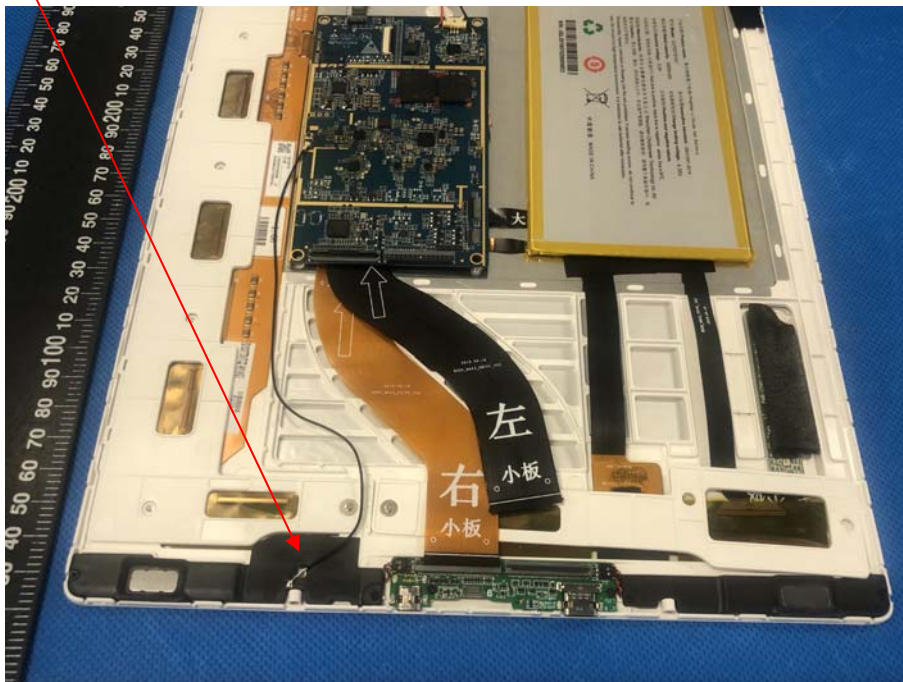

4.10. Photographs of Test Setup

Radiated Emission





Conducted Emission

