



# SAR Test Report

For

**Applicant Name:** Guangzhou Munbyn Information Technology Co., Ltd.  
**Address:** Unit L3A01-4, No. 31-6, Xicha Road, Baiyun District, Guangzhou  
**EUT Name:** Android Barcode Scanner  
**Brand Name:** Munbyn  
**Model Number:** IPDA099  
**Series Model Number:** IPDA061, MC01, MC02, MC03, MC04, MC05

## Issued By

**Company Name:** BTF Testing Lab (Shenzhen) Co., Ltd.  
**Address:** F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

**Report Number:** BTF240626R00501  
**Test Standards:** FCC 47 CFR§2.1093 IEC/IEEE 62209-1528: 2020  
IEEE C95.1-2019 KDB447498 D04 KDB865664 D01  
KDB865664 D02 KDB941225 D01 KDB941225 D05  
KDB248227 D01 KDB941225 D06 KDB648474 D04  
KDB690783 D01

**Test Conclusion:** Pass  
**Test Date:** 2024-07-02 to 2024-07-18  
**Date of Issue:** 2024-07-19

**Prepared By:** Zoey Zhang  
Zoey Zhang / Project Engineer

**Date:** 2024-07-19

**Approved By:** Ryan.CJ  
Ryan.CJ / EMC Manager

**Date:** 2024-07-19



*Note: All the test results in this report only related to the testing samples. Which can be duplicated completely for the legal use with approval of applicant; it shall not be reproduced except in full without the written approval of BTF Testing Lab (Shenzhen) Co., Ltd., All the objections should be raised within thirty days from the date of issue. To validate the report, you can contact us.*

Revision History		
Version	Issue Date	Revisions Content
R_V0	2024-07-19	Original
<i>Note:</i>	<i>Once the revision has been made, then previous versions reports are invalid.</i>	

**Table of Contents**

1. Introduction .....	4
1.1 Identification of Testing Laboratory .....	4
1.2 Identification of the Responsible Testing Location .....	4
1.3 Laboratory Condition .....	4
1.4 Announcement .....	4
2. Product Information .....	5
2.1 Application Information .....	5
2.2 Manufacturer Information .....	5
2.3 Factory Information .....	5
2.4 General Description of Equipment under Test (EUT) .....	5
2.5 Equipment under Test Ancillary Equipment .....	5
2.6 Technical Information .....	5
3. Summary of Test Results .....	7
3.1 Test Standards .....	7
3.2 Device Category and SAR Limit .....	7
3.3 Test Result Summary .....	8
3.4 Test Uncertainty .....	9
4. Measurement System .....	11
4.1 Specific Absorption Rate (SAR) Definition .....	11
4.2 MVG SAR System .....	11
5. System Verification .....	16
5.1 Purpose of System Check .....	16
5.2 System Check Setup .....	16
6. TEST POSITION CONFIGURATIONS .....	17
6.1 Head Exposure Conditions .....	17
6.2 Body-worn Position Conditions .....	22
6.3 Hotspot Mode Exposure Position Conditions .....	23
6.4 Product Specific 10g Exposure Consideration .....	23
7. Measurement Procedure .....	24
7.1 Measurement Process Diagram .....	24
7.2 SAR Scan General Requirement .....	25
7.3 Measurement Procedure .....	26
7.4 Area & Zoom Scan Procedure .....	26
8. Conducted RF Output Power .....	27
8.1 GSM .....	27
8.2 WCDMA .....	28
8.3 LTE .....	29
8.4 Wi-Fi .....	39
8.5 Bluetooth .....	40
9. Test Exclusion Consideration .....	41
9.1 SAR Test Exclusion Consideration Table .....	41
10. Test Result .....	42
11. SAR Measurement Variability .....	48
12. Simultaneous Transmission .....	49
12.1 Simultaneous Transmission Mode Considerations .....	49
12.2 Sum SAR of Simultaneous Transmission .....	49
13. Test Equipment List .....	50
ANNEX A Simulating Liquid Verification Result .....	51
ANNEX B System Check Result .....	51
ANNEX C SAR Dipole Calibrations .....	52
ANNEX D Test Data .....	71
ANNEX E SAR Test Setup Photos .....	131
ANNEX F EUT External and Internal Photos .....	133
ANNEX G Calibration Information .....	133

## 1. Introduction

### 1.1 Identification of Testing Laboratory

Company Name:	BTF Testing Lab (Shenzhen) Co., Ltd.
Address:	F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China
Phone Number:	+86-0755-23146130
Fax Number:	+86-0755-23146130

### 1.2 Identification of the Responsible Testing Location

Test Location:	BTF Testing Lab (Shenzhen) Co., Ltd.
Address:	F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China
Description:	All measurement facilities used to collect the measurement data are located at F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China
FCC Registration Number	518915
Designation Number	CN1330

### 1.3 Laboratory Condition

Ambient Temperature:	21°C to 25°C
Ambient Relative Humidity:	48% to 59%
Ambient Pressure:	100 kPa to 102 kPa

### 1.4 Announcement

- (1) The test report reference to the report template version v0.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing, reviewing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) This document may not be altered or revised in any way unless done so by BTF and all revisions are duly noted in the revisions section.
- (5) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
- (6) The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.

## 2. Product Information

### 2.1 Application Information

Company Name:	Guangzhou Munbyn Information Technology Co., Ltd.
Address:	Unit L3A01-4, No. 31-6, Xicha Road, Baiyun District, Guangzhou

### 2.2 Manufacturer Information

Company Name:	Guangzhou Munbyn Information Technology Co., Ltd.
Address:	Unit L3A01-4, No. 31-6, Xicha Road, Baiyun District, Guangzhou

### 2.3 Factory Information

Company Name:	Guangzhou Munbyn Information Technology Co., Ltd.
Address:	Unit L3A01-4, No. 31-6, Xicha Road, Baiyun District, Guangzhou

### 2.4 General Description of Equipment under Test (EUT)

EUT Name	Android Barcode Scanner
Under Test Model Name	IPDA099
Series Model Name	IPDA061, MC01, MC02, MC03, MC04, MC05
Description of Model name differentiation	Only the model is different, others are the same.
Sample No.	BTF SN240626008/1 E1

### 2.5 Equipment under Test Ancillary Equipment

Ancillary Equipment 1	Rechargeable Battery	
	Capacity	4500mAh
	Rated Voltage	3.8V

### 2.6 Technical Information

Network and Wireless connectivity	2G Network GSM/GPRS/EGPRS 850/1900 3G Network WCDMA/HSDPA/HSUPA Band 2/5 4G Network FDD LTE Band 2/4/5/7/13/17 TDD LTE Band 38/41 2.4G WIFI 802.11b, 802.11g, 802.11n(HT20/40) 5G WIFI 802.11a, 802.11n(HT20), 802.11ac(VHT20) BT (EDR+BLE)
-----------------------------------	--

The requirement for the following technical information of the EUT was tested in this report:

Operating Mode	GSM, WCDMA, LTE, WLAN, Bluetooth		
Frequency Range	GSM 850	TX: 824 ~ 849 MHz	RX: 869 ~ 894 MHz
	GSM 1900	TX: 1850 ~ 1910 MHz	RX: 1930 ~ 1990 MHz
	WCDMA Band 2	TX: 1850 ~ 1910 MHz	RX: 1930 ~ 1990 MHz
	WCDMA Band 5	TX: 824 ~ 849 MHz	RX: 869 ~ 894 MHz
	LTE Band 2	TX: 1850 ~ 1910 MHz	RX: 1930 ~ 1990 MHz
	LTE Band 4	TX: 1710 ~ 1755 MHz	RX: 2110 ~ 2155 MHz
	LTE Band 5	TX: 824 ~ 849 MHz	RX: 869 ~ 894 MHz
	LTE Band 7	TX: 2500 ~ 2570 MHz	RX: 2620 ~ 2690 MHz
	LTE Band 13	TX: 777 ~ 787 MHz	RX: 746 ~ 756 MHz
	LTE Band 17	TX: 704 ~ 716 MHz	RX: 734 ~ 746 MHz
	LTE Band 38	2570 ~ 2620 MHz	
	LTE Band 41	2496 ~ 2690 MHz	
	802.11b/g/n(HT20/40)	2412 ~ 2462 MHz 2422 ~ 2452 MHz	
	802.11a /802.11n(HT20) /802.11ac(VHT20)	5150 ~ 5250 MHz 5725 ~ 5850 MHz	
Bluetooth	2402 ~ 2480 MHz		
Antenna Type	WWAN: FPC Antenna WLAN: FPC Antenna BT: FPC Antenna		
Hotspot Function	Support		
Power Reduction	Not Support		
Exposure Category	General Population/Uncontrolled exposure		
EUT Stage	Portable Device		
Product	Type		
	<input type="checkbox"/> Production unit	<input checked="" type="checkbox"/> Identical prototype	

### 3. Summary of Test Results

#### 3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 2.1093	Radiofrequency radiation exposure evaluation: portable devices
2	IEC/IEEE 62209-1528: 2020	Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Part 1528: Human models, instrumentation, and procedures (Frequency range of 4 MHz to 10 GHz)
3	IEEE C95.1-2019	IEEE Standard for Safety Levels with Respect to Human Exposure to Electric, Magnetic, and Electromagnetic Fields, 0 Hz to 300 GHz
4	KDB447498 D04	Interim General RF Exposure Guidance v01
5	KDB865664 D01	SAR measurement 100MHz to 6GHz v01r04
6	KDB865664 D02	RF Exposure Reporting v01r02
7	KDB941225 D01	3G SAR Procedures v03r01
8	KDB941225 D05	SAR for LTE Devices v02r05
9	KDB248227 D01	802.11 Wi-Fi SAR v02r02
10	KDB941225 D06	Hotspot Mode v02r01
11	KDB648474 D04	Handset SAR v01r03
12	KDB690783 D01	SAR Listings on Grant v01r03

#### 3.2 Device Category and SAR Limit

This device belongs to portable device category because its radiating structure is allowed to be used within 20 centimeters of the body of the user. Limit for General Population/Uncontrolled exposure should be applied for this device, it is 1.6 W/kg as averaged over any 1 gram of tissue.

Body Position	SAR Value (W/Kg)	
	General Population/ Uncontrolled Exposure	Occupational/ Controlled Exposure
Whole-Body SAR (averaged over the entire body)	0.08	0.4
Partial-Body SAR (averaged over any 1 gram of tissue)	1.60	8.0
SAR for hands, wrists, feet and ankles (averaged over any 10 grams of tissue)	4.0	20.0

**NOTE:**

**General Population/Uncontrolled Exposure:** Locations where there is the exposure of individuals who have no knowledge or control of their exposure. General population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

**Occupational/Controlled Exposure:** Locations where there is exposure that may be incurred by persons who are aware of the potential for exposure. In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

### 3.3 Test Result Summary

The maximum results of Specific Absorption Rate (SAR) found during test as follows:

<Highest Reported standalone SAR Summary>

Exposure Position	Frequency Band	Reported SAR (W/kg)	Equipment Class	Highest Reported SAR (W/kg)	
Head 1-g SAR (0 mm Gap)	GSM 850	0.381	PCE	1.038	
	GSM 1900	0.087			
	WCDMA Band II	0.624			
	WCDMA Band V	0.281			
	LTE Band 2	1.014			
	LTE Band 4	1.038			
	LTE Band 5	0.590			
	LTE Band 7	0.549			
	LTE Band 13	0.528			
	LTE Band 17	0.460			
	LTE Band 38	0.104			
	LTE Band 41	0.107			
	WLAN 2.4 GHz	0.410			DTS
	WLAN 5.2 GHz	0.182			NII
WLAN 5.8 GHz	0.272				
Exposure Position	Frequency Band	Reported SAR (W/kg)	Equipment Class	Highest Reported SAR (W/kg)	
Hotspot(Body) 1-g SAR (10 mm Gap)	GSM 850	0.498	PCE	1.056	
	GSM 1900	0.365			
	WCDMA Band II	0.564			
	WCDMA Band V	0.273			
	LTE Band 2	0.707			
	LTE Band 4	1.056			
	LTE Band 5	0.293			
	LTE Band 7	0.330			
	LTE Band 13	0.247			
	LTE Band 17	0.267			
	LTE Band 38	0.097			
	LTE Band 41	0.124			
	WLAN 2.4 GHz	0.171			DTS
	WLAN 5.2 GHz	0.142			NII
WLAN 5.8 GHz	0.147				

This device is in compliance with Specific Absorption Rate(SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC47 CFR part 2(2.1093) and ANSI/IEEE C95.1-2019, and had been tested in accordance with the measurement methods and procedures specified in IEC/IEEE 62209-1528: 2020.

<Highest Reported Simultaneous SAR>

Exposure Position	Simultaneous Configuration	Highest Reported Simultaneous Transmission SAR (W/kg)	Limit (W/kg)	Verdict
Head 1-g SAR (0 mm Gap)	LTE Band 4 + 2.4G WIFI	1.448	1.6	Pass
Hotspot(Body) 1-g SAR (10 mm Gap)	LTE Band 4 + 2.4G WIFI	1.227	1.6	Pass



### 3.4 Test Uncertainty

#### 3.4.1 Measurement uncertainty evaluation for SAR test

#### Measurement uncertainty evaluation for SAR test (300MHz to 6GHz)

Uncertainty Component	Tol (+-%)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10 g Ui (+-%)	Vi veff
<b>Measurement System</b>								
Probe calibration	5.8	N	1	1	1	5.80	5.80	∞
Axial Isotropy	3.5	R	√3	√0.5	√0.5	1.43	1.43	∞
Hemispherical Isotropy	5.9	R	√3	√0.5	√0.5	2.41	2.41	∞
Boundary effect	1.0	R	√3	1	1	0.58	0.58	∞
Linearity	4.7	R	√3	1	1	2.71	2.71	∞
System detection limits	1.0	R	√3	1	1	0.58	0.58	∞
Modulation response	3.0	R	√3	1	1	1.73	1.73	∞
Readout Electronics	0.5	N	1	1	1	0.50	0.50	∞
Response Time	0	R	√3	1	1	0.00	0.00	∞
Integration Time	1.4	R	√3	1	1	0.81	0.81	∞
RF ambient Conditions - Noise	3.0	R	√3	1	1	1.73	1.73	∞
RF ambient Conditions - Reflections	3.0	R	√3	1	1	1.73	1.73	∞
Probe positioner Mechanical Tolerance	1.4	R	√3	1	1	0.81	0.81	∞
Probe positioning with respect to Phantom Shell	1.4	R	√3	1	1	0.81	0.81	∞
Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation	2.3	R	√3	1	1	1.33	1.33	∞
<b>Test sample Related</b>								
Test sample positioning	2.6	N	1	1	1	2.60	2.60	11
Device Holder Uncertainty	3.0	N	1	1	1	3.00	3.00	7
Output power Variation - SAR drift measurement	5.0	R	√3	1	1	2.89	2.89	∞
SAR scaling	2.0	R	√3	1	1	1.15	1.15	∞
<b>Phantom and Tissue Parameters</b>								
Phantom Shell Uncertainty - Shape, Thickness and Permittivity	4	R	√3	1	1	2.31	2.31	∞
Uncertainty in SAR correction for deviation in permittivity and conductivity	2.0	N	1	1	0.84	2.00	1.68	∞
Liquid conductivity measurement	4.0	N	1	0.78	0.71	3.12	2.84	5
Liquid permittivity measurement	5.0	N	1	0.23	0.26	1.15	1.30	5
Liquid Conductivity - Temperature Uncertainty	2.5	R	√3	0.78	0.71	1.13	1.02	∞
Liquid permittivity - Temperature Uncertainty	2.5	R	√3	0.23	0.26	0.33	0.38	∞
Combined Standard Uncertainty		RSS				10.47	10.34	
Expanded Uncertainty (95% Confidence interval)		k				20.95	20.69	

\* This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

## 3.4.2 Measurement uncertainty evaluation for system check

Uncertainty Component	Tol (+- %)	Prob. Dist.	Div.	Ci (1g)	Ci (10 g)	1g Ui (+-%)	10 g Ui (+-%)	Vi veff
<b>Measurement System</b>								
Probe calibration	5.8	N	1	1	1	5.80	5.80	∞
Axial Isotropy	3.5	R	√3	1	1	2.02	2.02	∞
Hemispherical Isotropy	5.9	R	√3	0	0	0.00	0.00	∞
Boundary effect	1	R	√3	1	1	0.58	0.58	∞
Linearity	4.7	R	√3	1	1	2.71	2.71	∞
System detection limits	1	R	√3	1	1	0.58	0.58	∞
Modulation response	0	N	√3	0	0	0.00	0.00	∞
Readout Electronics	0.5	N	1	1	1	0.50	0.50	∞
Response Time	0	R	√3	0	0	0.00	0.00	∞
Integration Time	1.4	R	√3	0	0	0.00	0.00	∞
RF ambient Conditions - Noise	3	R	√3	1	1	1.73	1.73	∞
RF ambient Conditions - Reflections	3	R	√3	1	1	1.73	1.73	∞
Probe positioner Mechanical Tolerance	1.4	R	√3	1	1	0.81	0.81	∞
Probe positioning with respect to Phantom Shell	1.4	R	√3	1	1	0.81	0.81	∞
Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation	2.3	R	√3	1	1	1.33	1.33	∞
<b>Dipole</b>								
Deviation of experimental source from numerical source	5	N	1	1	1	5.00	5.00	∞
Input Power and SAR drift measurement	0.5	R	√3	1	1	0.29	0.29	∞
Dipole Axis to Liquid Dist.	2.0	R	√3	1	1	1.15	1.15	∞
<b>Phantom and Tissue Parameters</b>								
Phantom Shell Uncertainty - Shape, Thickness and Permittivity	4	R	√3	1	1	2.31	2.31	∞
Uncertainty in SAR correction for deviation in permittivity and conductivity	2.0	N	1	1	0.84	2.00	1.68	∞
Liquid conductivity measurement	4	N	1	0.78	0.71	3.12	2.84	5
Liquid permittivity measurement	5.0	N	1	0.23	0.26	1.15	1.30	5
Liquid Conductivity - Temperature Uncertainty	2.5	R	√3	0.78	0.71	1.13	1.02	∞
Liquid permittivity - Temperature Uncertainty	2.5	R	√3	0.23	0.26	0.33	0.38	∞
Combined Standard Uncertainty		RSS				10.16	10.03	
Expanded Uncertainty (95% Confidence interval)		k				20.32	20.06	

## 4. Measurement System

### 4.1 Specific Absorption Rate (SAR) Definition

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person’s awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg) SAR measurement can be related to the electrical field in the tissue by

$$SAR = \frac{\sigma E^2}{\rho}$$

Where: σ is the conductivity of the tissue,  
ρ is the mass density of the tissue and E is the RMS electrical field strength.

### 4.2 MVG SAR System

#### 4.2.1 SAR system diagram

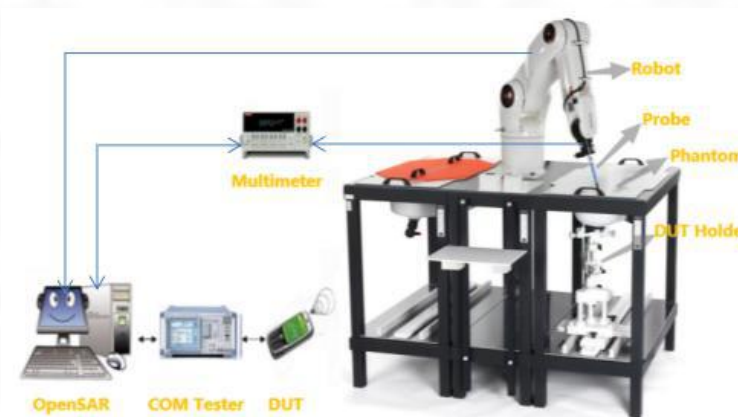

#### 4.2.2 Robot



- A standard high precision 6-axis robot (Denso) with teaches pendant with Scanning System
- It must be able to scan all the volume of the phantom to evaluate the tridimensional distribution of SAR.
  - Must be able to set the probe orthogonal of the surface of the phantom ( $\pm 30^\circ$ ).
  - Detects stresses on the probe and stop itself if necessary to keep the integrity of the probe.

#### 4.2.3 E-Field Probe

For the measurements, the Specific Dosimetric SSE2 E-Field Probe with following specifications is used:

- Dynamic range: 0.01-100 W/kg
- Tip diameter: 2mm for SSE2
- Distance between probe tip and sensor centre: 1mm for SSE2
- Distance between sensor centre and the inner phantom surface: 2mm for  $f \geq 4\text{GHz}$ .
- Probe linearity:  $< 0.25\text{dB}$ .
- Axial Isotropy:  $< 0.25\text{dB}$ .
- Spherical Isotropy:  $< 0.50\text{dB}$ .
- Calibration range: 150 to 6000 MHz for head & body simulating liquid
- Angle between probe axis (evaluation axis) and surface normal line: less than  $20^\circ$ .



#### 4.2.4 Phantoms

##### **SAM Phantom**

For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The probe scanning of the E-Field is done in the 2 halves of the normalized head. The normalized shape of the phantom corresponds to the dimensions of 90% of an adult head size. It enables the dosimetric evaluation of left and right-hand phone usage and includes an additional flat phantom part for the simplified body performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.



**SAM Phantom**

The thickness of the phantom amounts to 2 mm±0.2 mm. The materials for the phantom do not affect the radiation of the device under test (DUT) :  $\epsilon_r' < 5$   
 The head is filled with tissue simulating liquid. The hand do not have to be modeled.

**TWIN SAM phantom**

	Mechanical	Electrical	
Overall thickness	2±0.2 mm(except ear area)	Relative permittivity	3.4
Dimensions	1000 mm(L) x 500 mm(W) x 200 mm(H)	Loss tangent	0.02
Maximum volume	27 L		
Material	Fiberglass based		

**ELLIPTICAL Phantom**

The phantom is for Body performance check filled with tissue-equivalent liquid to a depth of at least 150 mm, whose shell material is resistant to damage or reaction with tissue-equivalent liquid chemicals.




**ELLI Phantom**

The shape of the phantom is an ellipse with length 600mm±5mm and width 400mm±5mm. The phantom shell is made of low-loss and low-permittivity material, having loss tangent  $\tan\delta \leq 0.05$  and relative permittivity:  
 $\epsilon_r' \leq 5$  for  $f \leq 3$  GHz  
 $3 \leq \epsilon_r' \leq 5$  for  $f > 3$  GHz  
 The thickness of the bottom-wall of the flat phantom is 2.0 mm with a tolerance of ± 0.2 mm.

**Technical & mechanical characteristics**

Shell thickness	2 mm ± 0.2 mm
Filling volume	25 L
Dimensions	600 mm x 400 mm x 200mm
Permittivity	4.4
Loss tangent	0.017

#### 4.2.5 Device Holder

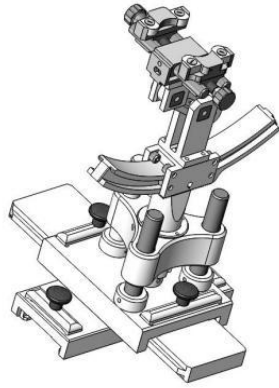

System Material	Permittivity	Loss tangent
Delrin	3.7	0.005


System Material	Permittivity	Loss tangent
PMMA	2.9	0.028

*(The positioning system allows obtaining cheek and tilting position with a very good accuracy. In compliance with CENELEC, the tilt angle uncertainty is lower than 1°.)*


#### 4.2.6 Simulating Liquid

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15 cm. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm. The nominal dielectric values of the tissue simulating liquids in the phantom and the tolerance of 5%.

Head Liquid Depth

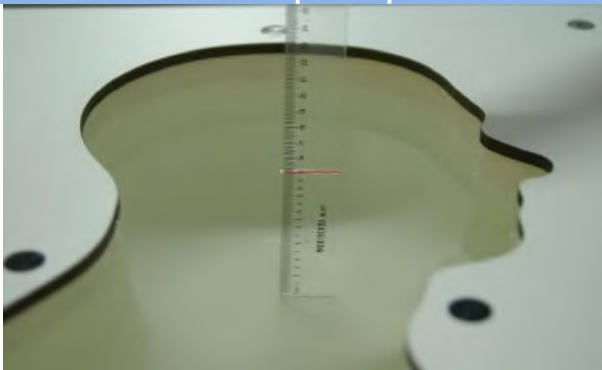

Body Liquid Depth

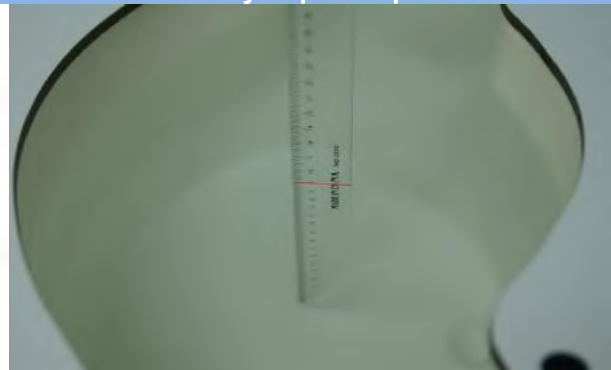

The following table gives the recipes for tissue simulating liquid and the theoretical Conductivity/Permittivity.


Head (Reference IEEE1528)								
Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity $\sigma$ (S/m)	Permittivity $\epsilon$
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
900	40.3	57.9	0.2	1.4	0.2	0	0.97	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.4	40.0
2450	55.0	0	0	0.1	0	44.9	1.80	39.2
2600	54.9	0	0	0.1	0	45.0	1.96	39.0
Frequency (MHz)	Water (%)	Hexyl Carbitol (%)			Triton X-100 (%)		Conductivity $\sigma$ (S/m)	Permittivity $\epsilon$
5200	62.52	17.24			17.24		4.66	36.0
5800	62.52	17.24			17.24		5.27	35.3
Body (From instrument manufacturer)								
Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity $\sigma$ (S/m)	Permittivity $\epsilon$
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
900	50.8	48.2	0	0.9	0.1	0	1.05	55.0
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0.1	0	31.3	1.95	52.7
2600	68.2	0	0	0.1	0	31.7	2.16	52.5
Frequency(MHz)	Water	DGBE (%)			Salt (%)		Conductivity $\sigma$ (S/m)	Permittivity $\epsilon$
5200	78.60	21.40			/		5.30	49.00
5800	78.50	21.40			0.1		6.00	48.20

## 5. System Verification

### 5.1 Purpose of System Check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. The setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

### 5.2 System Check Setup

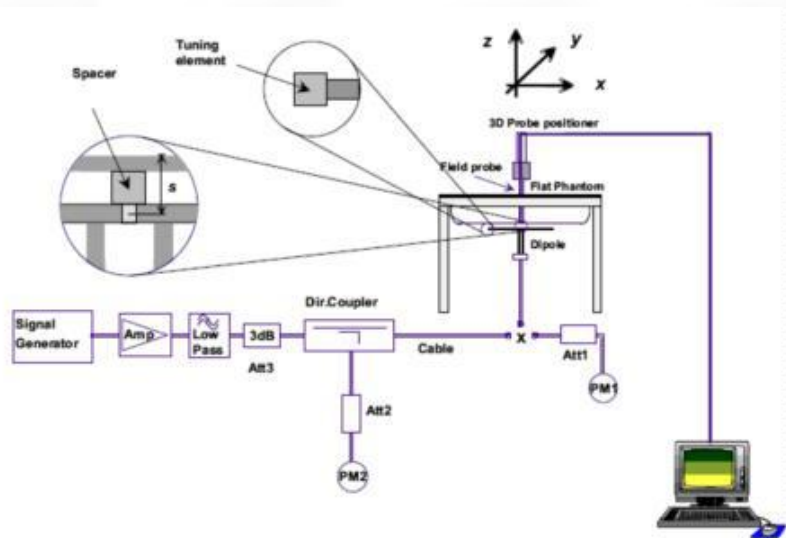



## 6. TEST POSITION CONFIGURATIONS

According to KDB 648474 D04 Handset, handsets are tested for SAR compliance in head, body-worn accessory and other use configurations described in the following subsections.

### 6.1 Head Exposure Conditions


Head exposure is limited to next to the ear voice mode operations. Head SAR compliance is tested according to the test positions defined in IEC IEEE 62209-1528:2020 using the SAM phantom illustrated as below.

#### 6.1.1 Definition of the cheek position


The cheek position is established using steps a) to j) as follows.

- (a) Configure the DUT for voice operation, if necessary. For example, for a DUT with a flip.a)swivel, or slide cover piece, open the cover if this is consistent with voice operation. If the DUT can also be used with the cover closed, both configurations shall be tested.
- (b) Define two imaginary lines on the DUT, the vertical centreline and the horizontal line, relative to the DUT in vertical orientation as shown in Figure 15.
- (c) The vertical centreline passes through two points on the front side of the DUT: the midpoint of the width  $w$  of the DUT at the level of the acoustic output (Point A in Figure 15), and the midpoint of the width  $w_t$  at the bottom of the DUT (Point B). The horizontal line is perpendicular to the vertical centerline, and passes through the centre of the acoustic output (Figure 15). The two lines intersect at Point A. Note that for many DUTs, Point A coincides with the centre of the acoustic output. However, the acoustic output could be located elsewhere on the horizontal line. Also note that the vertical centreline is not necessarily parallel to the front face of the DUT, especially for clamshell DUTs, DUTs with flip cover pieces, and other irregularly shaped DUTs.
- (d) Position the DUT close to the surface of the phantom such that Point A is on the (virtual) extension of the line passing through points RE (right-ear ear reference point) and LE left-ear ear reference point) on the phantom (see Figure 16a) and Figure 16b)). The plane determined by the vertical centreline and the horizontal line of the DUT shall be parallel to the sagittal plane of the phantom.
- (e) Translate the DUT towards the phantom along the line passing through RE and LE until the DUT touches the ear (see Figure 16c)).
- (f) Rotate the DUT around the (virtual) LE-RE Line until the DUT vertical centreline is in the)reference plane(see Figure 16d)).
- (g) Rotate the DUT around its vertical centreline until the plane established by the DUT vertical centreline and horizontal line is parallel to the N-F line (see Annex G), and then translate the DUT towards the phantom along the LE-RE line until DUT Point A touches the ear at the ERP (ear reference point) (see Figure 16e))
- (h) While keeping Point A on the line passing through RE and LE and maintaining the DUT in contact with the pinna, rotate the DUT about the N-F line until any point on the DUT is in contact with a phantom point below the pinna (cheek) (see Figure 16f)). The physical angles of rotation shall be documented.
- (i) While keeping DUT Point A in contact with the ERP rotate the DUT around a line perpendicular to the plane established by the DUT vertical centreline and horizontal line and passing through DUT Point A, until the DUT vertical centreline is in the reference plane(see Figure 16g)).

- (j) Verify that the cheek position is correct as follows:
- 1) the N-F line is in the plane established by the DUT vertical centreline and horizontal line;
  - 2) DUT Point A touches the pinna at the ERP
  - 3) the DUT vertical centreline is in the reference plane.

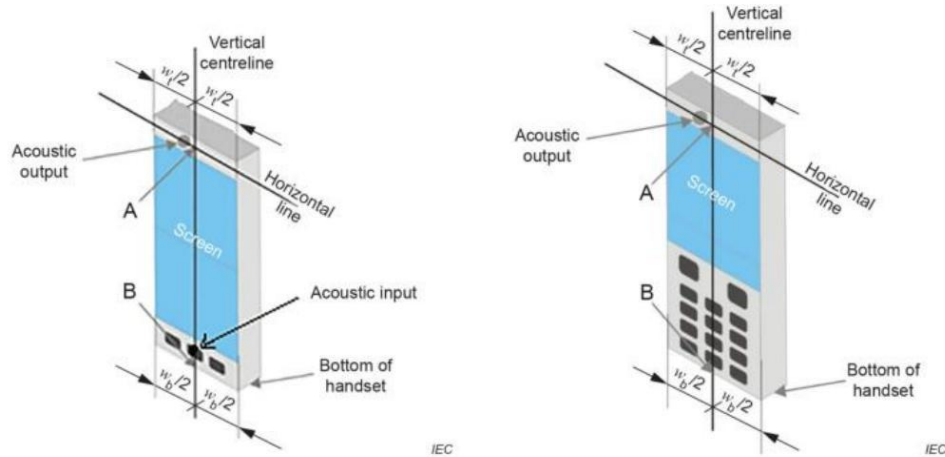


**Figure 15 - Vertical and horizontal reference lines and reference points A and B on two example device types: a full touch-screen smart phone (left) and a DUT with a keypad (right)**

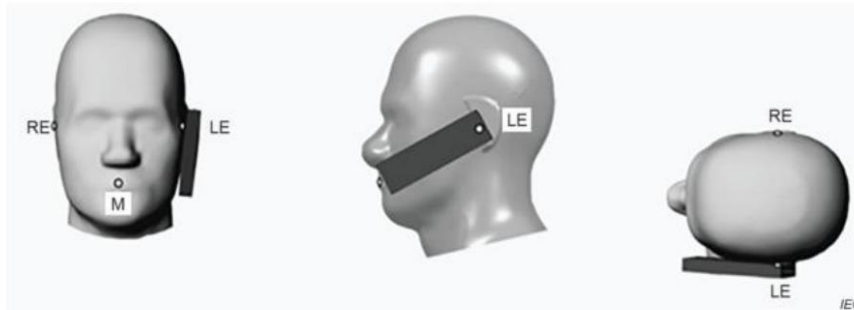


NOTE The reference points for the right-ear ear reference point (RE), left-ear ear reference point (LE), and mouth (M), which establish the reference plane for DUT positioning, are indicated. This device position shall be maintained for the sagittal phantom test set-up shown in Figure G.4.

**a) Phone position 1 – cheek position**

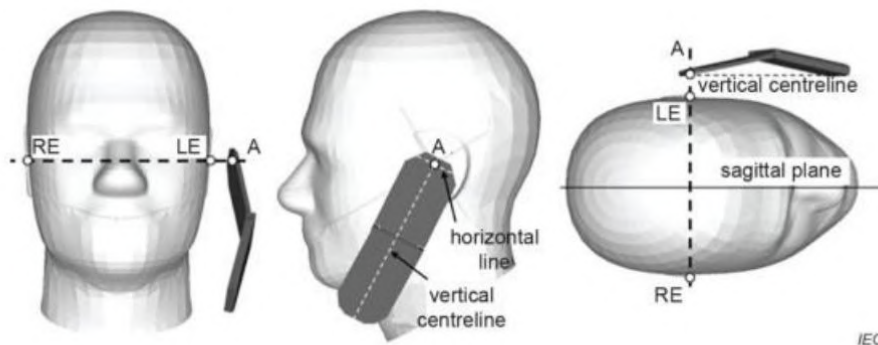


**b) One possible DUT position against the head after applying 7.2.4.2.2 c)**

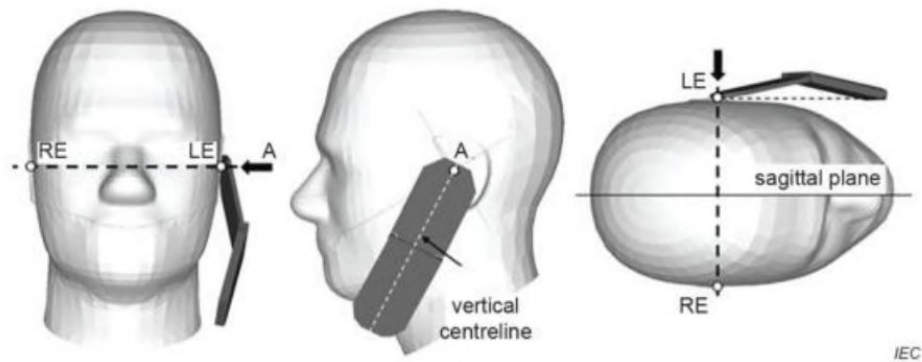


NOTE The black arrows show the direction of translation of the DUT for 7.2.4.2.2 d).

**c) DUT position after applying 7.2.4.2.2 d)**

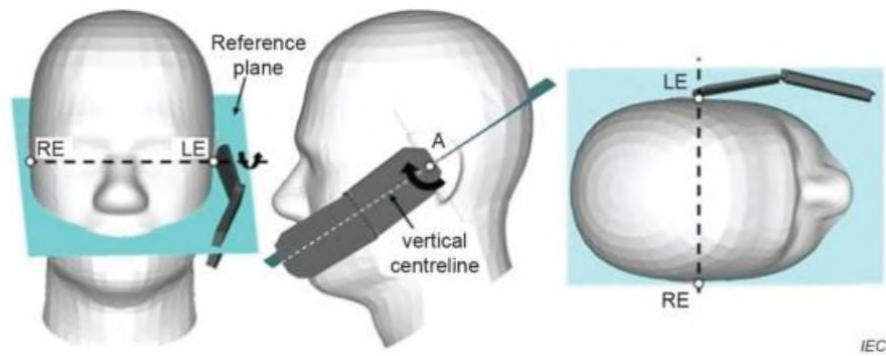


NOTE The curved black arrows show the direction of rotation of the DUT for 7.2.4.2.2 e).

**d) DUT position after applying 7.2.4.2.2 e)**

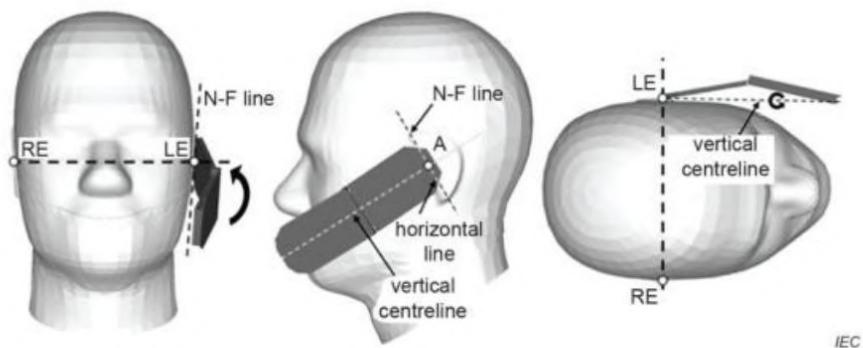


NOTE The curved black arrows show the direction of rotation of the DUT for 7.2.4.2.2 f).

**e) DUT position after applying 7.2.4.2.2 f)**

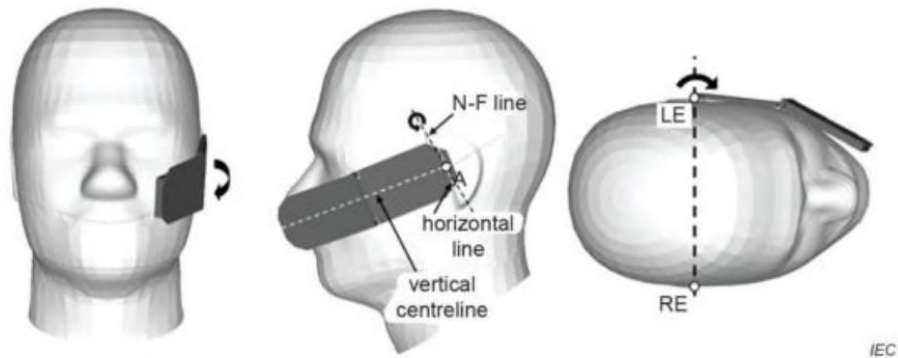

NOTE The curved black arrows show the direction of rotation of the DUT for 7.2.4.2.2 g)

f) DUT position after applying 7.2.4.2.2 g)

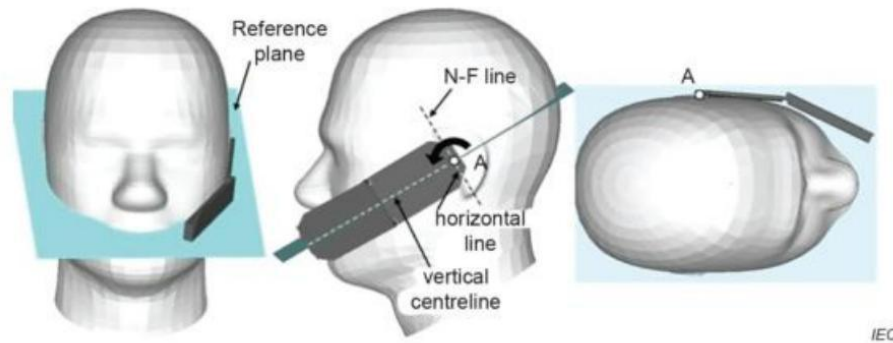

© IEC/IEEE 2020

NOTE The curved black arrows show the direction of rotation of the DUT for 7.2.4.2.2 h).


g) DUT position after applying 7.2.4.2.2 h)

**Figure 16 – Cheek position of the DUT on the left side of SAM where the device position shall be maintained for the phantom test set-up**

### 6.1.2 Definition of the tilt position

The tilt position is established using steps a) through d) as follows.

- (a) Repeat steps a) through j) of 7.2.4.2.2 to place the DUT in the cheek position)(see Figure16).
- (b) While maintaining the orientation of the DUT, move the DUT away from the pinna along the line passing through RE and LE far enough to allow a rotation of the DUT away from the cheek by 15°.
- (c) Rotate the DUT around the horizontal line by 15°(see Figure 17).
- (d) While maintaining the orientation of the DUT. move the DUT towards the phantom on a line passing through RE and LE until any part of the DUT touches the ear. The tilt position is obtained when the contact is on the pinna. If the contact is at any location other than the pinna, e.g. an extended antenna in contact with the back of the head phantom, the angle of the DUT shall be reduced. in this case, the tilt position is obtained if any part of the DUT is in contact with the pinna and a second point on the DUT is in contact with the phantom,e.g.the antenna in contact with the back of the head.

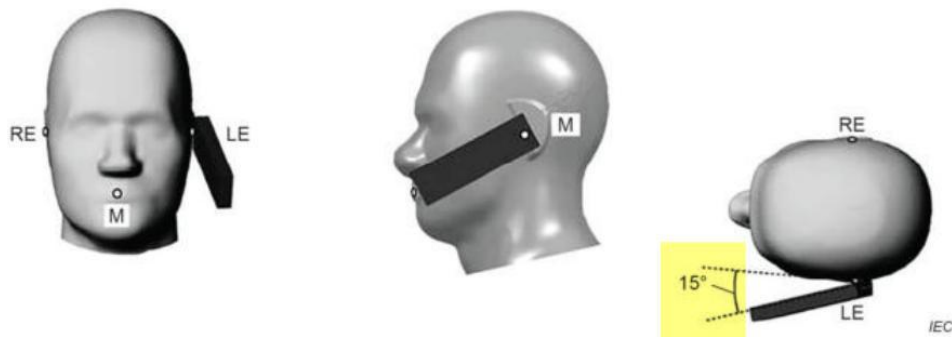

**Key**

- M Mouth reference point
- LE Left-ear ear reference point
- RE Right-ear ear reference point

This device position shall be maintained for the phantom test set-up.


**Figure 17 – Tilt position of the DUT on the left side of SAM**

## 6.2 Body-worn Position Conditions

Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in KDB 447498 are used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode. When the reported SAR for a body-worn accessory.


Body-worn accessories that do not contain metallic or conductive components may be tested according to worst-case exposure configurations, typically according to the smallest test separation distance required for the group of body-worn accessories with similar operating and exposure characteristics. All body-worn accessories containing metallic components are tested in conjunction with the host device.

Body-worn accessory SAR compliance is based on a single minimum test separation distance for all wireless and operating modes applicable to each body-worn accessory used by the host, and according to the relevant voice and/or data mode transmissions and operations. If a body-worn accessory supports voice only operations in its normal and expected use conditions, testing of data mode for body-worn compliance is not required. A conservative minimum test separation distance for supporting off-the-shelf body-worn accessories that may be acquired by users of consumer handsets is used to test for body-worn accessory SAR compliance. This distance is determined by the handset manufacturer, according to the requirements of Supplement C 01-01. Devices that are designed to operate on the body of users using lanyards and straps, or without requiring additional body-worn accessories, will be tested using a conservative minimum test separation distance  $\leq 5$  mm to support compliance.

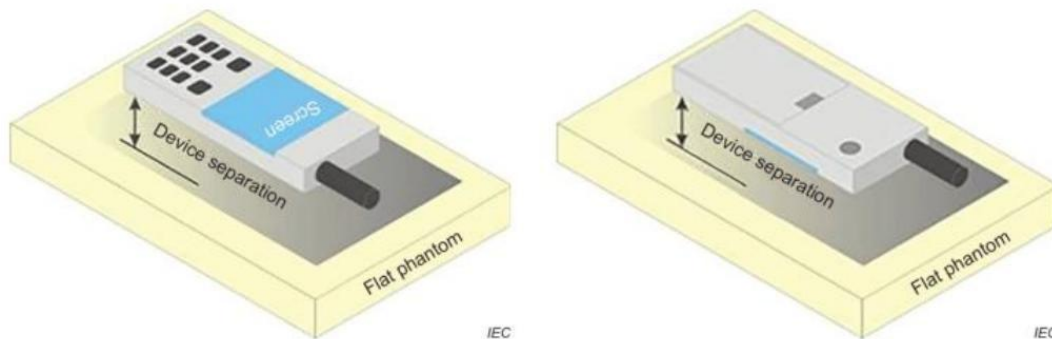

### 6.3 Hotspot Mode Exposure Position Conditions

For handsets that support hotspot mode operations, with wireless router capabilities and various web browsing functions, the relevant hand and body exposure conditions are tested according to the hotspot SAR procedures in KDB 941225. A test separation distance of 10 mm is required between the phantom and all surfaces and edges with a transmitting antenna located within 25 mm from that surface or edge. When the form factor of a handset is smaller than 9 cm x 5 cm, a test separation distance of 5 mm (instead of 10 mm) is required for testing hotspot mode. When the separation distance required for body-worn accessory testing is larger than or equal to that tested for hotspot mode, in the same wireless mode and for the same surface of the phone, the hotspot mode SAR data may be used to support body-worn accessory SAR compliance for that particular configuration (surface).

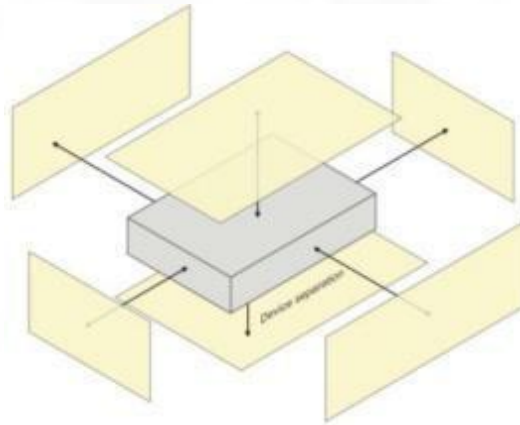

### 6.4 Product Specific 10g Exposure Consideration


According with FCC KDB 648474 D04, for smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, unless it is confirmed otherwise through KDB inquiries, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless modes and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance;

The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at  $\leq 25$  mm from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions. The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.

## 7. Measurement Procedure

### 7.1 Measurement Process Diagram

Body SAR

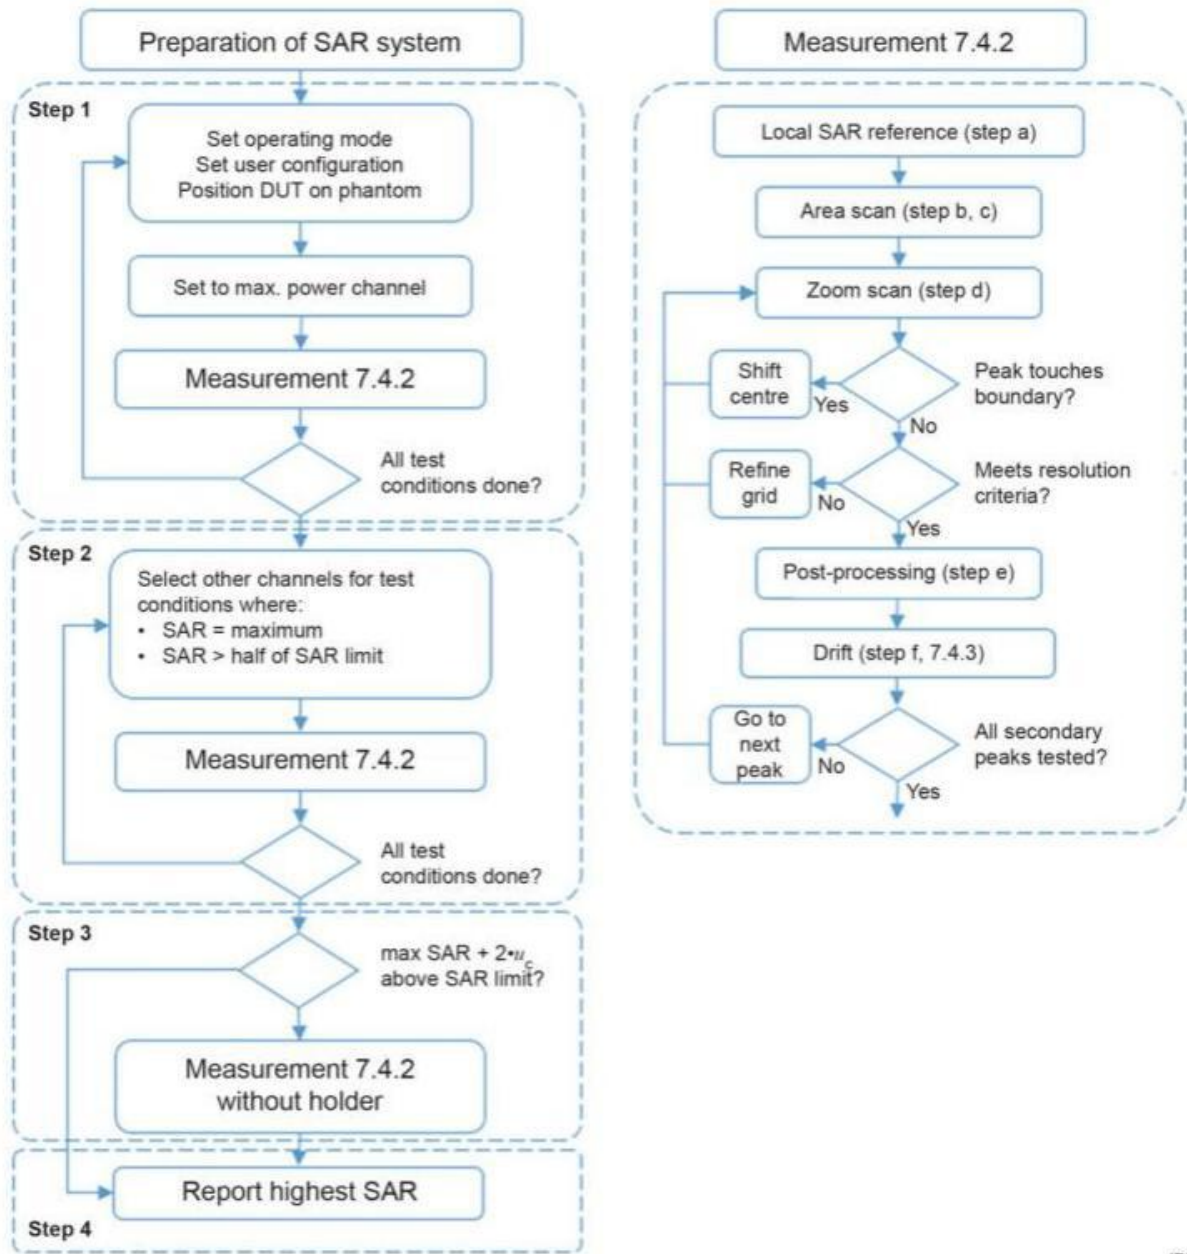

IEC



## 7.2 SAR Scan General Requirement

Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1 g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEC/IEEE 62209-1528: 2020.

**Table 3 – Area scan parameters**

Parameter	DUT transmit frequency being tested	
	$f \leq 3$ GHz	3 GHz < $f \leq 10$ GHz
Maximum distance between the measured points (geometric centre of the sensors) and the inner phantom surface ( $z_{M1}$ in Figure 20 in mm)	5 ± 1	$\delta \ln(2)/2 \pm 0,5^a$
Maximum spacing between adjacent measured points in mm (see O.8.3.1) <sup>b</sup>	20, or half of the corresponding zoom scan length, whichever is smaller	60/f, or half of the corresponding zoom scan length, whichever is smaller
Maximum angle between the probe axis and the phantom surface normal ( $\alpha$ in Figure 20) <sup>c</sup>	5° (flat phantom only) 30° (other phantoms)	5° (flat phantom only) 20° (other phantoms)
Tolerance in the probe angle	1°	1°

<sup>a</sup>  $\delta$  is the penetration depth for a plane-wave incident normally on a planar half-space.  
<sup>b</sup> See Clause O.8 on how  $\Delta x$  and  $\Delta y$  may be selected for individual area scan requirements.  
<sup>c</sup> The probe angle relative to the phantom surface normal is restricted due to the degradation in the measurement accuracy in fields with steep spatial gradients. The measurement accuracy decreases with increasing probe angle and increasing frequency. This is the reason for the tighter probe angle restriction at frequencies above 3 GHz.

**Table 4 – Zoom scan parameters**

Parameter	DUT transmit frequency being tested	
	$f \leq 3$ GHz	3 GHz < $f \leq 10$ GHz
Maximum distance between the closest measured points and the phantom surface ( $z_{M1}$ in Figure 20 and Table 3, in mm)	5	$\delta \ln(2)/2^a$
Maximum angle between the probe axis and the phantom surface normal ( $\alpha$ in Figure 20)	5° (flat phantom only) 30° (other phantoms)	5° (flat phantom only) 20° (other phantoms)
Maximum spacing between measured points in the x- and y-directions ( $\Delta x$ and $\Delta y$ , in mm)	8	24/f <sup>b</sup>
For uniform grids: Maximum spacing between measured points in the direction normal to the phantom shell ( $\Delta z_1$ in Figure 20, in mm)	5	10/(f - 1)
For graded grids: Maximum spacing between the two closest measured points in the direction normal to the phantom shell ( $\Delta z_1$ in Figure 20, in mm)	4	12/f
For graded grids: Maximum incremental increase in the spacing between measured points in the direction normal to the phantom shell ( $R_z = \Delta z_2/\Delta z_1$ in Figure 20)	1,5	1,5
Minimum edge length of the zoom scan volume in the x- and y-directions ( $L_z$ in O.8.3.2, in mm)	30	22
Minimum edge length of the zoom scan volume in the direction normal to the phantom shell ( $L_n$ in O.8.3.2 in mm)	30	22
Tolerance in the probe angle	1°	1°

<sup>a</sup>  $\delta$  is the penetration depth for a plane-wave incident normally on a planar half-space.  
<sup>b</sup> This is the maximum spacing allowed, which might not work for all circumstances.

### 7.3 Measurement Procedure

The following steps are used for each test position

- a. Establish a call with the maximum output power with a base station simulator. The connection between the mobile and the base station simulator is established via air interface
- b. Measurement of the local E-field value at a fixed location. This value serves as a reference value for calculating a possible power drift.
- c. Measurement of the SAR distribution with a grid of 8 to 16mm \* 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme.
- d. Around this point, a cube of 30 \* 30 \* 30 mm or 32 \* 32 \* 32 mm is assessed by measuring 5 or 8 \* 5 or 8\*4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

### 7.4 Area & Zoom Scan Procedure

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g. Area scan and zoom scan resolution setting follows KDB 865664 D01v01r04 quoted below.

When the 1 g SAR of the highest peak is within 2 dB of the SAR limit, additional zoom scans are required for other peaks within 2 dB of the highest peak that have not been included in any zoom scan to ensure there is no increase in SAR.

## 8. Conducted RF Output Power

### 8.1 GSM

Mode: GSM850		Maximum Tune-up(dBm)	Burst Average Power (dBm)			Division Factors	Frame-Average Power (dBm)		
			CH128	CH190	CH251		CH128	CH190	CH251
			824.2MHz	836.6MHz	848.8MHz		824.2MHz	836.6MHz	848.8MHz
GSM		<b>32.00</b>	30.51	<b>31.59</b>	31.05	-9.03	21.48	<b>22.56</b>	22.02
GPRS (GMSK)	1Tx slot	31.00	30.95	30.60	29.20	-9.03	21.92	21.57	20.17
	2Tx slots	31.00	29.10	30.73	30.24	-6.02	23.08	24.71	24.22
	3Tx slots	30.50	30.06	28.96	29.32	-4.26	25.80	24.70	25.06
	4Tx slots	<b>30.00</b>	29.47	29.62	<b>29.93</b>	-3.01	26.46	26.61	<b>26.92</b>
EGPRS (8PSK)	1Tx slot	31.00	30.04	30.50	30.56	-9.03	21.01	21.47	21.53
	2Tx slots	30.50	30.33	30.07	30.27	-6.02	24.31	24.05	24.25
	3Tx slots	31.00	29.92	30.51	30.36	-4.26	25.66	26.25	26.10
	4Tx slots	30.50	29.94	29.53	30.06	-3.01	26.93	26.52	27.05
Mode: GSM1900		Maximum Tune-up(dBm)	Burst Average Power (dBm)			Division Factors	Frame-Average Power (dBm)		
			CH512	CH661	CH810		CH512	CH661	CH810
			1850.2MHz	1880.0MHz	1909.8MHz		1850.2MHz	1880.0MHz	1909.8MHz
GSM		<b>30.00</b>	<b>29.96</b>	29.54	29.89	-9.03	<b>20.93</b>	20.51	20.86
GPRS (GMSK)	1Tx slot	28.50	28.45	27.40	27.41	-9.03	19.42	18.37	18.38
	2Tx slots	28.50	28.37	27.90	28.39	-6.02	22.35	21.88	22.37
	3Tx slots	28.00	27.13	27.82	27.45	-4.26	22.87	23.56	23.19
	4Tx slots	<b>29.00</b>	27.66	27.97	<b>28.53</b>	-3.01	24.65	24.96	<b>25.52</b>
EGPRS (8PSK)	1Tx slot	28.50	28.17	27.68	27.87	-9.03	19.14	18.65	18.84
	2Tx slots	29.00	28.06	28.65	28.13	-6.02	22.04	22.63	22.11
	3Tx slots	29.00	28.80	27.93	28.41	-4.26	24.54	23.67	24.15
	4Tx slots	28.50	28.14	27.68	27.61	-3.01	25.13	24.67	24.60
Note:									
1) Division Factors									
To average the power, the division factor is as follows:									
1Tx-slot = 1 transmit time slot out of 8 time slots=> conducted power divided by (8/1) => -9.03dB									
2Tx-slots = 2 transmit time slots out of 8 time slots=> conducted power divided by (8/2) => -6.02dB									
3Tx-slots = 3 transmit time slots out of 8 time slots=> conducted power divided by (8/3) => -4.26dB									
4Tx-slots = 4 transmit time slots out of 8 time slots=> conducted power divided by (8/4) => -3.01dB									

## 8.2 WCDMA

Mode		Maximum Tune-up(dBm)	WCDMA Band II		
			Conducted Power (dBm)		
			CH9262	CH9400	CH9538
RMC 12.2K		<b>24.00</b>	<b>23.83</b>	23.13	23.51
HSDPA	Subtest-1	22.50	21.46	22.45	22.39
	Subtest-2	22.50	22.47	21.75	21.39
	Subtest-3	23.50	23.00	22.47	22.32
	Subtest-4	23.00	22.40	22.61	22.42
HSUPA	Subtest-1	23.00	21.84	21.76	22.84
	Subtest-2	22.50	22.05	22.25	21.71
	Subtest-3	22.50	21.87	21.99	22.00
	Subtest-4	22.50	22.29	22.33	22.01
	Subtest-5	23.00	22.07	21.63	22.68
Mode		Maximum Tune-up(dBm)	WCDMA Band V		
			Conducted Power (dBm)		
			CH4132	CH4183	CH4233
RMC 12.2K		<b>24.00</b>	22.74	<b>23.74</b>	23.55
HSDPA	Subtest-1	23.00	22.56	22.05	22.26
	Subtest-2	22.50	21.98	21.90	22.38
	Subtest-3	23.00	22.84	22.44	21.91
	Subtest-4	22.50	21.57	22.45	22.17
HSUPA	Subtest-1	23.00	22.59	22.36	21.91
	Subtest-2	22.50	22.13	22.48	22.11
	Subtest-3	23.00	22.41	21.71	22.82
	Subtest-4	22.50	22.44	22.02	21.60
	Subtest-5	22.50	22.10	22.06	22.12
Per KDB 941225 D01, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq 1/2$ dB higher than the primary mode (RMC12.2kbps) or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is $\leq 1.2$ W/kg, SAR measurement is not required for the secondary mode.					

### 8.3 LTE

Band 2

LTE-FDD Band 2				Maximum Tune-up(dBm)	Conducted Power(dBm)		
Bandwidth	Modulation	RB allocation	RB offset		18607	18900	19193
					1850.7MHz	1880.0MHz	1909.3MHz
1.4MHz	QPSK	1	0	23.50	22.97	23.45	23.48
			2	23.50	23.29	22.67	23.46
			5	23.50	22.61	23.21	23.43
		3	0	23.50	23.21	22.53	22.93
			2	23.50	23.07	23.16	22.74
			3	23.50	23.37	23.42	23.26
	16QAM	6	0	23.50	23.01	22.83	23.40
			0	23.50	22.80	23.12	22.69
			2	23.50	22.68	22.91	23.03
		1	5	23.50	23.48	22.59	22.73
			0	23.50	23.07	23.29	23.20
			2	23.50	22.72	22.64	23.39
3	3	23.50	23.44	22.95	23.08		
	6	0	23.50	22.53	23.40	22.74	
	6	0	23.50	22.53	23.40	22.74	
Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	18615	18900	19185
					1851.5MHz	1880.0MHz	1908.5MHz
3MHz	QPSK	1	0	23.50	23.04	23.12	23.13
			7	23.50	22.80	23.36	22.74
			14	23.50	23.03	22.79	23.01
		8	0	23.50	22.85	23.45	22.52
			4	23.50	23.02	22.65	23.09
			7	23.00	22.61	22.78	22.59
	15	0	23.50	23.27	22.77	23.25	
	16QAM	1	0	23.50	23.02	23.47	23.26
			7	23.50	23.09	22.90	22.67
			14	23.50	22.59	22.83	23.13
		8	0	23.00	22.53	22.91	22.79
			4	23.50	23.34	22.91	23.06
7			23.00	22.54	22.68	22.81	
15	0	23.00	22.77	22.80	22.80		
Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	18625	18900	19175
					1852.5MHz	1880.0MHz	1907.5MHz
5MHz	QPSK	1	0	23.00	22.75	22.83	22.60
			13	23.00	22.59	22.80	22.59
			24	23.50	23.20	23.11	23.33
		12	0	23.50	23.21	22.75	22.72
			6	23.50	22.85	22.84	23.29
			13	23.50	23.33	23.37	22.53
	25	0	23.50	22.83	22.91	23.41	
	16QAM	1	0	23.50	23.05	22.99	23.03
			13	23.00	22.80	22.55	22.98
			24	24.00	23.46	23.02	23.50
		12	0	23.50	22.81	23.40	22.85
			6	23.50	23.46	22.80	23.22
13			23.50	22.62	22.79	23.15	
25	0	23.50	23.25	23.37	22.70		

LTE-FDD Band 2				Maximum Tune-up(dBm)	Conducted Power(dBm)				
Bandwidth	Modulation	RB allocation	RB offset		18650	18900	19150		
					1855.0MHz	1880.0MHz	1905.0MHz		
10MHz	QPSK	1	0	23.50	22.53	22.86	23.26		
			25	23.50	23.24	22.76	23.10		
			49	23.50	23.22	23.34	22.87		
		25	0	23.50	23.33	23.28	23.24		
			13	23.50	22.53	23.01	22.77		
			25	24.00	23.50	22.65	22.62		
	50	0	23.50	22.55	23.19	22.83			
		16QAM	1	0	23.50	22.58	23.48	22.53	
				25	23.50	23.13	22.93	23.08	
	49			23.50	23.10	22.63	22.87		
	16QAM	25	0	23.50	23.16	23.36	22.59		
			13	23.50	23.20	23.47	22.78		
			25	23.50	22.78	22.67	23.12		
		50	0	23.50	23.45	22.99	22.85		
			15MHz	QPSK	1	0	23.50	23.12	22.70
38						23.50	23.21	22.65	23.12
74	23.50	22.83				22.79	23.44		
36	0	23.50	23.37		23.30	23.05			
	18	23.00	22.68		22.70	22.56			
	39	23.50	23.15		22.72	23.04			
75	0	23.50	23.37	22.86	23.35				
	16QAM	1	0	23.50	23.25	23.00	22.92		
			38	23.50	22.54	23.11	22.56		
74			23.50	23.45	22.74	22.57			
36		0	23.50	23.43	23.07	22.75			
		18	23.50	22.92	23.05	23.07			
		39	23.50	23.39	23.43	22.61			
75	0	23.50	23.33	23.47	22.78				
	20MHz	QPSK	1	0	<b>24.00</b>	23.30	22.76	<b>23.93</b>	
				50	23.50	23.06	23.23	23.46	
99				23.50	22.72	23.32	22.92		
50	0		23.50	22.71	23.38	22.69			
	25		23.50	23.28	23.02	22.83			
	50		23.50	23.43	22.65	<b>23.14</b>			
100	0	23.50	22.92	23.34	23.44				
	16QAM	1	0	24.00	22.57	23.88	23.36		
			50	23.00	22.94	22.80	22.60		
99			23.50	23.13	23.09	22.99			
50		0	23.50	23.18	22.81	22.70			
		25	23.50	23.48	22.72	23.23			
		50	23.50	22.82	23.24	22.69			
100	0	23.50	22.78	23.33	23.17				
	Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	18675	18900	19125	
						1857.5MHz	1880.0MHz	1902.5MHz	
Bandwidth						Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)
	1860.0MHz	1880.0MHz	1900.0MHz						

Band 4

LTE-FDD Band 4				Maximum Tune-up(dBm)	Conducted Power(dBm)			
Bandwidth	Modulation	RB allocation	RB offset		19957	20175	20393	
					1710.7MHz	1732.5MHz	1754.3MHz	
1.4MHz	QPSK	1	0	23.50	23.07	22.79	22.71	
			2	23.50	22.85	23.23	22.59	
			5	23.50	22.61	23.24	23.46	
		3	0	23.50	23.03	23.14	22.56	
			2	23.50	23.06	23.26	23.22	
			3	23.50	22.54	23.06	23.33	
	16QAM	6	0	23.50	23.28	23.30	22.69	
			1	0	23.50	23.38	23.36	22.61
				2	23.50	23.19	23.49	23.03
		5		23.00	22.52	22.88	22.65	
		3	0	23.50	23.29	22.86	22.99	
			2	23.50	22.76	23.17	23.43	
3	23.50		22.96	23.13	22.85			
6	0	23.50	22.83	22.76	23.16			
	Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	19965	20175	20385
						1711.5MHz	1732.5MHz	1753.5MHz
3MHz	QPSK	1	0	23.50	23.49	23.49	23.08	
			7	23.00	22.96	22.96	22.87	
			14	23.50	23.20	23.35	23.18	
		8	0	23.50	23.32	22.82	23.29	
			4	23.50	22.83	23.32	22.84	
			7	23.00	22.91	22.98	22.78	
	16QAM	15	0	23.50	23.06	22.91	23.15	
			1	0	23.50	22.59	23.42	22.93
				7	23.50	23.31	23.37	23.25
		14		23.50	22.83	22.73	23.04	
		8	0	23.00	22.94	22.88	22.98	
			4	23.50	23.08	23.21	22.96	
			7	23.50	22.76	23.49	22.60	
		15	0	23.50	23.37	22.56	22.53	
			Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	19976
1712.5MHz	1732.5MHz							1752.5MHz
5MHz	QPSK	1	0	23.50	23.48	22.60	23.16	
			13	23.50	23.25	22.92	22.81	
			24	23.50	23.12	22.80	23.47	
		12	0	23.50	23.16	22.62	23.01	
			6	23.50	22.66	22.74	23.27	
			13	23.50	22.98	22.82	23.41	
	16QAM	25	0	23.50	23.35	22.92	22.58	
			1	0	23.50	22.51	23.44	23.31
				13	23.50	22.92	22.63	23.33
		24		23.50	22.71	22.82	23.38	
		12	0	23.50	23.22	22.62	23.02	
			6	23.50	23.46	22.79	23.38	
			13	23.50	23.27	22.61	23.49	
		25	0	23.50	22.52	23.12	23.45	

LTE-FDD Band 4				Maximum Tune-up(dBm)	Conducted Power(dBm)			
Bandwidth	Modulation	RB allocation	RB offset		20000	20175	20350	
					1715.0MHz	1732.5MHz	1750.0MHz	
10MHz	QPSK	1	0	23.50	23.03	22.56	23.31	
			25	23.00	22.89	22.88	22.66	
			49	23.50	23.39	22.99	22.81	
		25	0	23.00	22.98	22.98	22.69	
			13	23.50	23.31	22.53	23.44	
			25	23.00	22.62	22.76	22.76	
	50	0	23.50	23.25	22.59	23.31		
		16QAM	1	0	23.50	23.29	23.04	22.88
				25	23.50	22.75	23.11	23.42
	49			23.50	23.37	23.39	22.86	
	25	1	0	23.50	23.35	23.03	23.22	
			13	23.50	23.11	22.75	23.38	
			25	23.50	22.52	23.33	23.36	
	50	1	0	23.50	22.52	23.01	22.63	
			16QAM	1	0	23.50	20025	20175
25					23.50	1717.5MHz	1732.5MHz	1747.5MHz
15MHz	QPSK	1	0	23.50	23.03	22.79	23.00	
			38	23.00	22.61	22.88	22.69	
			74	23.50	23.06	22.92	22.69	
		36	0	24.00	23.13	22.95	23.50	
			18	23.50	23.38	22.91	23.29	
			39	23.50	23.16	23.44	22.63	
	75	0	23.50	22.74	23.31	23.16		
		16QAM	1	0	23.50	23.17	22.71	22.58
				38	23.50	23.18	22.96	22.62
	74			23.50	23.15	23.46	23.46	
	36	1	0	23.50	23.39	23.20	22.76	
			18	23.50	23.45	23.00	23.01	
			39	23.50	22.73	23.21	23.44	
	75	1	0	23.50	23.32	23.00	22.73	
			16QAM	1	0	23.50	20050	20175
25					23.50	1720.0MHz	1732.5MHz	1745.0MHz
20MHz	QPSK	1	0	<b>24.00</b>	23.07	<b>23.89</b>	23.04	
			50	23.00	22.71	22.61	22.97	
			99	24.00	23.50	22.54	23.15	
		50	0	23.00	22.89	22.61	22.77	
			25	23.50	23.04	22.64	22.56	
			50	23.50	23.45	<b>23.22</b>	23.28	
	100	0	23.50	22.58	22.64	23.32		
		16QAM	1	0	24.00	23.80	22.52	23.03
				50	23.50	22.96	23.11	23.37
	99			23.00	22.89	22.83	22.82	
	50	1	0	23.50	22.66	23.15	23.40	
			25	23.00	22.87	22.58	22.60	
			50	23.50	22.52	23.36	22.89	
	100	1	0	23.50	23.27	22.71	23.20	



Band 5

LTE-FDD Band 5				Maximum Tune-up(dBm)	Conducted Power(dBm)		
Bandwidth	Modulation	RB allocation	RB offset		20407	20525	20643
					824.7MHz	836.5MHz	848.3MHz
1.4MHz	QPSK	1	0	23.50	23.44	23.36	23.19
			2	23.50	23.38	22.89	22.57
			5	23.50	22.91	22.61	23.41
		3	0	23.50	23.24	22.53	22.51
			2	23.50	22.57	23.15	23.04
			3	23.50	22.72	23.13	23.06
	6	0	23.50	22.80	22.54	23.34	
	16QAM	1	0	23.50	23.21	22.52	23.21
			2	23.50	22.62	23.32	23.27
			5	23.00	22.77	22.60	22.99
		3	0	23.50	23.45	23.48	23.46
			2	24.00	22.89	23.38	23.50
			3	23.50	23.16	22.63	23.28
	6	0	23.50	23.43	22.93	22.95	
	Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	20415	20525
					825.5MHz	836.5MHz	847.5MHz
3MHz	QPSK	1	0	23.50	22.51	23.14	22.51
			7	23.50	23.34	23.05	22.76
			14	23.50	23.10	22.71	22.76
		8	0	23.00	22.82	22.78	22.51
			4	23.50	23.07	22.88	22.96
			7	23.50	22.77	23.30	22.62
	15	0	23.00	22.83	22.50	22.70	
	16QAM	1	0	23.00	22.71	22.71	22.59
			7	23.50	22.99	23.09	22.61
			14	23.50	23.48	22.86	22.59
		8	0	23.50	23.27	22.65	22.70
			4	23.00	22.86	22.92	22.98
			7	23.50	23.21	23.36	22.65
	15	0	23.50	22.68	22.81	23.35	

LTE-FDD Band 5				Maximum Tune-up(dBm)	Conducted Power(dBm)		
Bandwidth	Modulation	RB allocation	RB offset		20425	20525	20625
					826.5MHz	836.5MHz	846.5MHz
5MHz	QPSK	1	0	23.00	22.58	22.53	22.65
			13	23.50	23.12	22.89	23.46
			24	23.50	23.08	23.06	23.25
		12	0	23.50	22.98	22.67	23.29
			6	23.50	22.87	23.33	22.83
			13	23.50	23.18	22.50	23.29
	25	0	23.50	23.49	22.95	23.41	
	16QAM	1	0	23.50	22.94	22.84	23.40
			13	23.50	22.70	23.09	22.65
			24	23.50	23.16	22.52	22.81
		12	0	23.50	23.23	22.54	22.99
			6	23.50	22.74	23.21	22.60
			13	23.50	22.85	22.55	23.04
	25	0	23.50	22.63	22.96	23.29	

Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	20450	20525	20600
					829.0MHz	836.5MHz	844.0MHz
10MHz	QPSK	1	0	24.00	22.92	23.88	22.75
			25	23.50	23.41	22.58	23.44
			49	23.50	22.90	23.23	23.04
		25	0	23.50	23.27	23.09	23.42
			13	23.50	22.90	23.45	22.96
			25	23.50	23.11	23.29	23.43
	50	0	23.50	22.75	23.17	22.79	
	16QAM	1	0	24.00	23.37	23.75	23.12
			25	23.50	23.20	23.15	23.09
			49	23.50	23.03	22.91	23.37
		25	0	23.50	22.88	23.28	22.90
			13	23.50	23.29	22.59	23.38
			25	23.50	22.80	22.97	23.18
		50	0	23.50	23.13	22.60	22.92

Band 7

LTE-FDD Band 7				Maximum Tune-up(dBm)	Conducted Power(dBm)			
Bandwidth	Modulation	RB allocation	RB offset		20775	21100	21425	
				2502.5MHz	2535MHz	2567.5MHz		
5MHz	QPSK	1	0	23.50	22.74	23.32	23.27	
			12	23.50	22.65	22.95	23.32	
			24	23.50	23.11	22.85	23.32	
		12	0	23.50	22.96	23.24	22.94	
			6	23.50	23.01	22.77	22.68	
			13	23.50	23.06	22.62	22.78	
	25	0	23.50	23.49	22.78	22.52		
	16QAM	1	0	23.50	23.31	22.84	23.43	
			12	23.50	22.58	23.06	22.62	
			24	23.50	23.23	23.05	23.27	
		12	0	23.50	23.26	23.07	22.69	
			6	23.50	23.42	23.34	22.51	
			13	23.50	22.92	23.23	23.05	
		25	0	23.50	22.55	23.33	23.30	
		Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	20800	21100
2505MHz							2535MHz	2565MHz
10MHz	QPSK	1	0	23.50	23.09	22.82	23.00	
			24	23.50	23.45	22.88	22.67	
			49	23.00	22.52	22.87	22.67	
		25	0	23.50	22.56	23.23	22.81	
			12	23.50	23.16	23.33	22.54	
			25	23.50	23.09	23.22	22.95	
	50	0	23.00	22.56	22.51	22.87		
	16QAM	1	0	23.50	23.42	22.90	23.24	
			24	23.50	22.84	23.36	23.43	
			49	23.50	22.95	22.85	23.31	
		25	0	23.50	23.37	22.52	22.61	
			12	23.50	23.01	22.64	23.12	
			25	23.00	22.84	22.89	22.99	
		50	0	23.50	22.82	22.64	23.38	

LTE-FDD Band 7				Maximum Tune-up(dBm)	Conducted Power(dBm)			
Bandwidth	Modulation	RB allocation	RB offset		20825	21100	21375	
					2507.5MHz	2535MHz	2562.5MHz	
15MHz	QPSK	1	0	23.50	23.20	22.76	23.07	
			38	23.50	23.08	23.10	23.43	
			74	23.00	22.61	22.61	22.73	
		38	0	23.50	23.40	23.37	22.62	
			18	23.50	22.71	23.21	22.80	
			37	23.00	22.95	22.62	22.85	
	75	0	23.50	23.33	22.76	23.13		
	16QAM	1	0	23.50	22.95	23.04	23.05	
			38	23.50	23.33	22.81	23.40	
			74	23.50	23.42	23.37	23.24	
		38	0	24.00	23.42	23.08	23.50	
			18	23.50	23.24	22.72	22.83	
			37	23.50	23.21	23.08	23.02	
		75	0	23.00	22.95	22.58	22.92	
		Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	20850	21100
20MHz		QPSK	1	0	<b>24.00</b>	23.23	23.10	<b>23.83</b>
	49			23.50	23.39	22.57	22.86	
	99			23.00	22.79	22.95	22.61	
	50		0	23.50	23.03	22.80	<b>23.36</b>	
			25	23.50	23.09	23.18	23.19	
			50	23.50	22.57	23.33	22.62	
	100		0	23.50	23.39	22.72	23.20	
	16QAM		1	0	24.00	22.70	22.78	23.63
				49	23.00	22.68	22.97	22.58
		99		23.50	23.20	23.46	23.11	
		50	0	23.50	23.04	23.16	22.94	
			25	23.50	23.04	22.93	22.82	
			50	23.50	23.03	23.19	22.74	
		100	0	23.50	23.28	22.64	22.52	

Band 13

LTE-FDD Band 13				Maximum Tune-up(dBm)	Conducted Power(dBm)		
Bandwidth	Modulation	RB allocation	RB offset		23205	23230	23255
					779.5MHz	782.0MHz	784.5MHz
5MHz	QPSK	1	0	23.00	22.74	22.68	22.66
			13	23.50	23.23	23.06	22.53
			24	23.00	22.83	22.93	22.93
		12	0	23.50	23.32	22.53	23.41
			6	23.00	22.93	22.58	22.91
			13	23.50	23.39	23.04	22.62
	25	0	23.00	22.80	22.95	22.56	
	16QAM	1	0	23.00	22.90	22.81	22.55
			13	23.00	22.72	22.96	22.70
			24	23.50	22.60	22.87	23.25
		12	0	23.50	22.58	22.58	23.06
			6	23.50	22.70	23.07	22.75
			13	23.50	23.30	22.84	22.65
		25	0	23.00	22.67	22.65	22.82

Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	23230	
					782.0MHz	
10MHz	QPSK	1	0	24.00	23.86	
			25	23.50	23.45	
			49	23.50	23.23	
		25	0	23.50	23.22	
			13	23.50	23.47	
			25	23.00	22.85	
		50	0	23.00	22.82	
		16QAM	1	0	24.00	23.75
				25	23.00	22.84
	49			23.00	22.64	
	25		0	23.00	22.57	
			13	23.50	23.22	
			25	23.50	23.26	
	50	0	23.00	22.59		

Band 17

LTE-FDD Band 17				Maximum Tune-up(dBm)	Conducted Power(dBm)			
Bandwidth	Modulation	RB allocation	RB offset		23755	23790	23825	
				706.5MHz	710MHz	713.5MHz		
5MHz	QPSK	1	0	23.00	22.95	22.82	22.99	
			13	23.50	22.70	23.00	23.28	
			24	23.00	22.63	22.81	22.83	
		12	0	23.50	22.66	23.21	23.47	
			6	23.00	22.71	22.94	22.71	
			13	23.50	23.10	22.94	23.40	
		25	0	23.50	22.72	23.46	23.35	
		16QAM	1	0	23.00	22.60	22.68	22.51
				13	23.50	23.21	23.15	22.58
	24			23.50	23.41	22.65	23.32	
	12		0	23.50	23.22	22.60	23.36	
			6	23.50	23.14	23.46	22.72	
			13	23.00	22.97	22.83	22.97	
	25	0	23.50	22.97	23.36	23.03		
	Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	23780	23790	23800
10MHz	QPSK	1	0	24.00	22.81	23.17	23.95	
			25	23.50	23.15	22.95	23.09	
			49	23.50	22.69	23.01	23.41	
		25	0	23.00	22.64	22.85	22.89	
			13	23.50	23.26	23.17	22.50	
			25	23.50	22.52	22.85	23.27	
		50	0	23.50	23.33	22.72	22.63	
		16QAM	1	0	24.00	22.52	22.99	23.84
				25	23.50	22.83	22.95	23.31
	49			23.50	23.28	22.61	22.85	
	25		0	23.50	23.39	23.00	22.87	
			13	23.50	23.23	23.48	22.70	
			25	23.50	23.47	22.99	23.44	
	50	0	23.50	23.02	23.14	23.43		

Band 38

LTE-TDD Band 38				Maximum Tune-up(dBm)	Conducted Power(dBm)		
Bandwidth	Modulation	RB allocation	RB offset		37775	38000	38225
					2572.50MHz	2595.00MHz	2617.50MHz
5MHz	QPSK	1	0	23.50	23.02	22.88	23.23
			12	23.50	23.24	23.17	22.78
			24	23.50	23.33	23.04	22.88
		12	0	24.00	22.85	22.56	23.50
			6	23.50	22.83	23.04	23.13
			13	23.50	23.35	22.56	22.59
	25	0	23.50	23.10	22.99	23.27	
	16QAM	1	0	23.50	23.01	22.94	23.02
			12	23.50	23.39	22.76	22.87
			24	23.50	22.52	23.41	23.45
		12	0	23.50	22.97	23.04	23.17
			6	23.50	23.38	23.46	22.76
			13	23.50	23.08	23.07	23.16
		25	0	23.50	22.98	23.24	23.20
		0	23.50	22.98	23.24	23.20	
Bandwidth		Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	37800	38000
					2575.00MHz	2595.00MHz	2615.00MHz
10MHz	QPSK	1	0	23.50	22.81	23.06	22.80
			24	23.50	23.01	22.64	22.55
			49	23.50	22.76	23.32	23.07
		25	0	23.50	23.24	23.33	22.73
			12	23.50	23.41	22.88	22.94
			25	23.00	22.86	22.55	22.93
	50	0	23.50	23.34	23.12	22.74	
	16QAM	1	0	23.50	23.12	22.63	23.20
			24	23.50	22.84	22.59	23.05
			49	23.50	22.64	23.34	23.40
		25	0	23.50	22.89	23.25	22.65
			12	23.50	23.36	23.23	22.57
			25	23.50	23.33	23.36	22.86
		50	0	23.50	22.82	22.84	23.03

LTE-TDD Band 38				Maximum Tune-up(dBm)	Conducted Power(dBm)		
Bandwidth	Modulation	RB allocation	RB offset		37825	38000	38175
					2577.50MHz	2595.00MHz	2612.50MHz
15MHz	QPSK	1	0	23.50	23.20	23.33	22.68
			38	23.50	23.05	23.19	22.81
			74	23.50	23.40	23.32	22.96
		38	0	23.50	22.65	22.84	23.00
			18	23.00	22.57	22.80	22.70
			37	23.50	22.86	23.33	23.49
	75	0	23.50	23.03	22.98	23.32	
	16QAM	1	0	23.50	22.59	23.10	23.35
			38	23.50	22.91	22.89	23.11
			74	23.50	23.40	23.42	23.33
		38	0	23.50	22.63	23.41	22.86
			18	23.50	22.74	23.24	22.51
			37	23.50	23.21	23.39	23.07
		75	0	23.50	23.06	23.38	23.33

Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	37850	38000	38150
					2580.00MHz	2595.00MHz	2610.00MHz
20MHz	QPSK	1	0	24.00	23.15	22.96	23.91
			49	23.50	22.63	22.64	23.01
			99	23.00	22.57	22.83	22.67
		50	0	23.50	23.23	22.86	22.64
			25	23.00	22.82	23.26	23.00
			50	23.50	23.43	22.63	22.81
	100	0	23.50	22.84	22.61	23.25	
	16QAM	1	0	24.00	23.45	22.57	23.84
			49	23.50	23.25	22.88	22.92
			99	23.50	22.92	23.38	23.36
		50	0	23.00	22.72	22.54	22.67
			25	23.50	22.68	23.19	23.21
			50	23.50	23.09	23.38	23.42
		100	0	23.50	23.28	23.02	22.72

Band 41

LTE-TDD Band 41				Maximum Tune-up(dBm)	Conducted Power(dBm)			
Bandwidth	Modulation	RB allocation	RB offset		40065	40590	41215	
				2537.5MHz	2590.0MHz	2652.5MHz		
5MHz	QPSK	1	0	23.50	23.47	22.96	22.73	
			13	23.50	23.38	22.94	23.25	
			24	23.00	22.61	22.55	22.94	
		12	0	23.50	22.73	22.64	23.41	
			6	23.50	22.94	22.55	23.05	
			13	23.50	23.36	23.37	23.34	
	25	0	23.50	23.33	22.51	23.31		
	16QAM	1	0	23.50	23.02	22.64	22.76	
			13	23.00	22.62	22.98	22.74	
			24	23.50	23.23	22.74	23.47	
		12	0	23.50	23.06	23.34	22.79	
			6	23.50	23.42	23.00	22.84	
			13	24.00	23.50	23.05	23.16	
		25	0	23.50	23.12	23.26	23.00	
		Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	40090	40590
2540.0MHz							2590.0MHz	2650.0MHz
10MHz	QPSK	1	0	23.00	22.80	22.65	22.82	
			25	23.50	23.43	23.05	23.15	
			49	23.50	22.86	22.60	23.35	
		25	0	23.50	22.96	23.46	22.58	
			13	23.00	22.79	22.86	22.98	
			25	23.00	22.97	22.84	22.66	
	50	0	23.50	23.21	22.83	23.49		
	16QAM	1	0	23.50	22.96	23.32	22.88	
			25	23.00	22.57	22.90	22.82	
			49	24.00	23.50	22.67	23.25	
		25	0	23.50	23.09	22.74	22.77	
			13	23.50	23.19	23.29	22.97	
			25	23.50	23.43	23.02	23.07	
		50	0	23.50	22.90	22.92	23.42	

LTE-TDD Band 41				Maximum Tune-up(dBm)	Conducted Power(dBm)			
Bandwidth	Modulation	RB allocation	RB offset		40115	40590	41165	
					2542.5MHz	2590.0MHz	2647.5MHz	
15MHz	QPSK	1	0	23.50	23.04	23.16	23.24	
			38	23.50	23.00	23.47	22.80	
			74	23.50	22.51	22.72	23.19	
		36	0	23.50	22.98	23.11	22.72	
			18	23.50	22.73	23.41	22.76	
			39	23.50	23.48	22.85	22.97	
		75	0	23.50	22.99	22.76	23.27	
		16QAM	1	0	23.50	22.62	23.04	23.48
				38	23.50	23.15	22.64	23.26
	74			23.50	22.55	23.28	23.01	
	36		0	23.50	23.33	23.43	22.75	
			18	23.50	23.25	22.99	22.90	
			39	23.50	23.34	22.68	23.22	
	75	0	23.50	23.25	23.24	23.45		
	Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	40140	40590	41140
					2545.0MHz	2590.0MHz	2645.0MHz	
20MHz	QPSK	1	0	<b>24.00</b>	22.90	22.76	<b>23.93</b>	
			50	23.50	22.53	22.65	23.21	
			99	23.00	22.84	22.76	22.52	
		50	0	23.50	23.25	22.67	<b>23.41</b>	
			25	23.00	22.95	22.61	22.83	
			50	23.50	22.65	23.09	22.69	
		100	0	23.50	23.47	23.03	22.58	
		16QAM	1	0	24.00	23.18	23.74	22.86
				50	23.50	23.29	23.24	23.11
	99			23.50	22.65	22.94	23.34	
	50		0	23.50	23.22	23.09	23.38	
			25	23.50	23.20	23.49	22.84	
			50	23.50	23.14	22.60	22.59	
	100	0	23.50	23.44	23.32	23.46		

### 8.4 Wi-Fi

Band (GHz)	Mode	Channel	Freq. (MHz)	Average Power (dBm)	Maximum Tune-up(dBm)	SAR Test Require.
2.4g Wifi (2.4~2.4835)	802.11b	1	2412	19.44	19.50	No
		6	2437	19.92	20.00	No
		11	2462	<b>19.98</b>	<b>20.00</b>	Yes
	802.11g	1	2412	22.28	22.00	No
		6	2437	22.18	22.50	No
		11	2462	22.34	22.50	No
	802.11n(HT20)	1	2412	22.30	22.50	No
		6	2437	22.27	22.50	No
		11	2462	22.42	22.50	No
	802.11n(HT40)	3	2422	22.31	22.50	No
		6	2437	22.07	22.50	No
		9	2452	<b>22.44</b>	<b>22.50</b>	Yes

Note: SAR is not required for the following 2.4 GHz OFDM conditions as the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2W/kg.

Band (GHz)	Mode	Channel	Freq. (MHz)	Average power (dBm)	Maximum Tune-up(dBm)	SAR Test Require.
U-NII-1 (5.150~5.250)	802.11a	36	5180	15.82	16.00	No
		40	5200	15.53	16.00	No
		48	5240	16.58	17.00	No
	802.11n(HT20)	36	5180	15.58	16.00	No
		40	5200	15.44	15.50	No
		48	5240	16.45	16.50	No
	802.11ac(VHT20)	36	5180	15.73	16.00	No
		40	5200	15.75	16.00	No
		48	5240	<b>16.61</b>	<b>17.00</b>	Yes
Band (GHz)	Mode	Channel	Freq. (MHz)	Average power (dBm)	Maximum Tune-up(dBm)	SAR Test Require.
U-NII-3 (5.725~5.850)	802.11a	149	5745	16.01	16.50	No
		157	5785	15.57	16.00	No
		165	5825	15.54	16.00	No
	802.11n(HT20)	149	5745	<b>16.07</b>	<b>16.50</b>	Yes
		157	5785	15.83	16.00	No
		165	5825	15.97	16.00	No
	802.11ac(VHT20)	149	5745	16.04	16.50	No
		157	5785	15.88	16.00	No
		165	5825	15.82	16.00	No

### 8.5 Bluetooth

EDR	Mode	Maximum Tune-up(dBm)	Average Conducted Output Power (dBm)		
			0	39	78
			2402MHz	2441MHz	2480MHz
			GFSK	-1.00	-1.56
	$\pi/4$ QPSK	1.50	0.88	1.05	0.38
	8DPSK	<b>1.50</b>	1.32	<b>1.48</b>	0.84
BLE	Mode	Maximum Tune-up(dBm)	Average Conducted Output Power (dBm)		
			0	20	39
			2402MHz	2440MHz	2480MHz
			1Mbps	-1.00	-1.81

Channel	Frequency (GHz)	Max. Tune-up Power (dBm)	Max. Power (mW)	Test distance (mm)	Exclusion thresholds for 1-g SAR(mW)	RF exposure evaluation required
39	2.441	1.50	1.41	0	2.75	No
39	2.441	1.50	1.41	10	10.28	No

**Note**  
 1. Per KDB 447498 D04 Interim General RF Exposure Guidance v01, the 1-g SAR test exclusion thresholds for 300 MHz to 6 GHz at test separation distances  $\leq 40$  cm are determined by:

$$P_{th} \text{ (mW)} = \begin{cases} ERP_{20 \text{ cm}} (d/20 \text{ cm})^x & d \leq 20 \text{ cm} \\ ERP_{20 \text{ cm}} & 20 \text{ cm} < d \leq 40 \text{ cm} \end{cases} \quad \text{(B.2)}$$

where

$$P_{th} \text{ (mW)} = ERP_{20 \text{ cm}} \text{ (mW)} = \begin{cases} 2040f & 0.3 \text{ GHz} \leq f < 1.5 \text{ GHz} \\ 3060 & 1.5 \text{ GHz} \leq f \leq 6 \text{ GHz} \end{cases} \quad \text{(B.1)}$$


and  $f$  is in GHz,  $d$  is the separation distance (cm), and  $ERP_{20 \text{ cm}}$  is per Formula (B.1).

- \*When the minimum test separation distance is  $< 5$  mm, a distance of 5 mm is applied to determine estimated SAR.
- Per KDB 248227 D01 v02r02, choose the highest output power channel to test SAR and determine further SAR exclusion.
  - The output power of all data rate were prescan, just the worst case (the lowest data rate) of all mode were shown in report.



## 9. Test Exclusion Consideration

Antenna information:

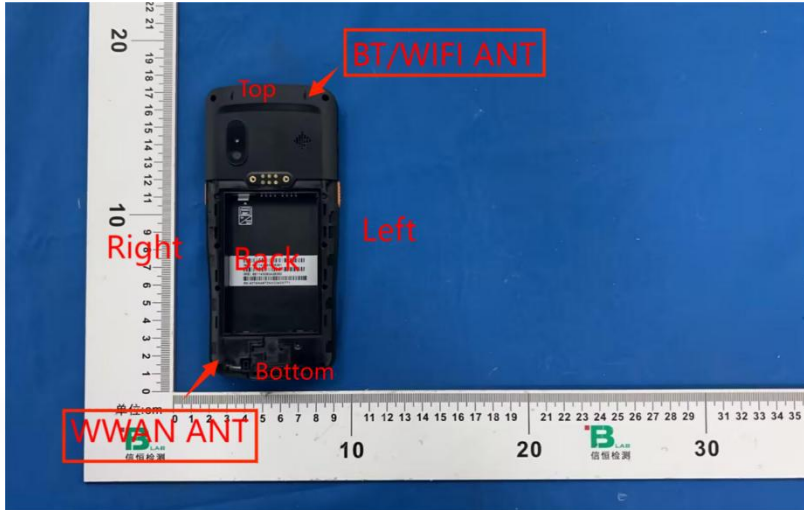

WWAN Main Antenna	GSM/WCDMA/LTE TX/RX
WLAN/BT Antenna	WLAN/BT TX/RX
Note:	
1. KDB 447498 D04v01, particular DUT edges were not required to be evaluated for SAR if the antenna-to-edge distance is greater than 2.5cm.	
2. Per KDB648474 D04, 10-g extremity SAR is not required when Body-Worn mode 1-g reported SAR < 1.2W/Kg.	

Distance of The Antenna to the EUT surface and edge (mm)						
Antenna	Front Side (mm)	Back Side (mm)	Left Edge (mm)	Right Edge (mm)	Top Edge (mm)	Bottom Edge (mm)
WWAN	<25	<25	56	<25	147	<25
BT/Wifi	<25	<25	<25	63	<25	140
Positions for SAR tests: Hotspot mode						
Antenna	Front Side (mm)	Back Side (mm)	Left Edge (mm)	Right Edge (mm)	Top Edge (mm)	Bottom Edge (mm)
WWAN	Yes	Yes	No	Yes	No	Yes
BT/Wifi	Yes	Yes	Yes	No	Yes	No

### 9.1 SAR Test Exclusion Consideration Table

Per KDB 447498 requires when the standalone SAR test exclusion of section 4.3.1 is applied to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to the following format to determine simultaneous transmission SAR test exclusion:

$$(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})} / x]$$

W/kg for test separation distances  $\leq 50$  mm;

where  $x = 7.5$  for 1-g SAR, and  $x = 18.75$  for 10-g SAR.

0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is  $> 50$  mm

Mode	Channel	Frequency (GHz)	Max tune-up power (dBm)	Max. Power (mW)	Exposure Position	Head	Body-worn
					Test Dist.(mm)	0	10
BT	39	2.441	1.50	1.41	Estimated SAR(W/kg)	0.059	0.029

## 10. Test Result

Head(0mm gap)												
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
GSM 850 (voice)	Left Cheek	190	836.6	3.540	0.304	100.00	1.000	31.59	32.00	1.099	0.334	/
	Left Tilt	190	836.6	0.630	0.196	100.00	1.000	31.59	32.00	1.099	0.215	/
	Right Cheek	190	836.6	-3.850	0.347	100.00	1.000	31.59	32.00	1.099	<b>0.381</b>	1#
	Right Tilt	190	836.6	-2.170	0.212	100.00	1.000	31.59	32.00	1.099	0.233	/
Body(10mm Gap)												
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
GSM 850 (voice)	Front	190	836.6	-2.490	0.370	100.00	1.000	31.59	32.00	1.099	<b>0.407</b>	/
	Back	190	836.6	1.730	0.311	100.00	1.000	31.59	32.00	1.099	0.342	/
	Right	190	836.6	0.240	0.186	100.00	1.000	31.59	32.00	1.099	0.204	/
	Bottom	190	836.6	2.620	0.178	100.00	1.000	31.59	32.00	1.099	0.196	/
Body(hotspot open, 10mm Gap)												
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
GPRS 850+4slots	Front	251	848.8	-3.510	0.490	100.00	1.000	29.93	30.00	1.016	<b>0.498</b>	2#
	Back	251	848.8	-2.630	0.395	100.00	1.000	29.93	30.00	1.016	0.401	/
	Right	251	848.8	-1.040	0.225	100.00	1.000	29.93	30.00	1.016	0.229	/
	Bottom	251	848.8	2.530	0.203	100.00	1.000	29.93	30.00	1.016	0.206	/

Head(0mm gap)												
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
GSM 1900 (voice)	Left Cheek	512	1850.2	3.420	0.079	100.00	1.000	29.96	30.00	1.009	0.080	/
	Left Tilt	512	1850.2	1.660	0.050	100.00	1.000	29.96	30.00	1.009	0.050	/
	Right Cheek	512	1850.2	-0.720	0.086	100.00	1.000	29.96	30.00	1.009	<b>0.087</b>	3#
	Right Tilt	512	1850.2	-1.340	0.062	100.00	1.000	29.96	30.00	1.009	0.063	/
Body(hotspot open, 10mm Gap)												
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
GSM 1900 (voice)	Front	512	1850.2	-2.710	0.106	100.00	1.000	29.96	30.00	1.009	<b>0.107</b>	/
	Back	512	1850.2	0.140	0.092	100.00	1.000	29.96	30.00	1.009	0.093	/
	Right	512	1850.2	3.290	0.074	100.00	1.000	29.96	30.00	1.009	0.075	/
	Bottom	512	1850.2	-1.450	0.069	100.00	1.000	29.96	30.00	1.009	0.070	/
Body(hotspot open, 10mm Gap)												
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
GPRS 1900+4slots	Front	810	1909.8	-1.190	0.328	100.00	1.000	28.53	29.00	1.114	<b>0.365</b>	4#
	Back	810	1909.8	4.360	0.205	100.00	1.000	28.53	29.00	1.114	0.228	/
	Right	810	1909.8	-0.220	0.119	100.00	1.000	28.53	29.00	1.114	0.133	/
	Bottom	810	1909.8	-3.780	0.102	100.00	1.000	28.53	29.00	1.114	0.114	/

Head(0mm gap)												
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
WCDMA Band 2 (RMC*)	Left Cheek	9262	1852.4	2.970	0.512	100.00	1.000	23.83	24.00	1.040	0.532	/
	Left Tilt	9262	1852.4	0.130	0.289	100.00	1.000	23.83	24.00	1.040	0.301	/
	Right Cheek	9262	1852.4	-0.410	0.600	100.00	1.000	23.83	24.00	1.040	<b>0.624</b>	5#
	Right Tilt	9262	1852.4	-1.620	0.324	100.00	1.000	23.83	24.00	1.040	0.337	/
Body(hotspot open, 10mm Gap)												
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas. SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
WCDMA Band 2 (RMC*)	Front	9262	1852.4	-4.320	0.542	100.00	1.000	23.83	24.00	1.040	<b>0.564</b>	6#
	Back	9262	1852.4	3.440	0.485	100.00	1.000	23.83	24.00	1.040	0.504	/
	Right	9262	1852.4	-0.750	0.312	100.00	1.000	23.83	24.00	1.040	0.324	/
	Bottom	9262	1852.4	2.610	0.515	100.00	1.000	23.83	24.00	1.040	0.536	/

Head(0mm gap)												
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
WCDMA Band 5 (RMC*)	Left Cheek	4183	836.6	-1.400	0.231	100.00	1.000	23.74	24.00	1.062	0.245	/
	Left Tilt	4183	836.6	2.970	0.101	100.00	1.000	23.74	24.00	1.062	0.107	/
	Right Cheek	4183	836.6	-3.620	0.265	100.00	1.000	23.74	24.00	1.062	<b>0.281</b>	7#
	Right Tilt	4183	836.6	2.810	0.122	100.00	1.000	23.74	24.00	1.062	0.130	/
Body(hotspot open, 10mm Gap)												
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
WCDMA Band 5 (RMC*)	Front	4183	836.6	-4.390	0.257	100.00	1.000	23.74	24.00	1.062	<b>0.273</b>	8#
	Back	4183	836.6	-1.680	0.140	100.00	1.000	23.74	24.00	1.062	0.149	/
	Right	4183	836.6	1.310	0.226	100.00	1.000	23.74	24.00	1.062	0.240	/
	Bottom	4183	836.6	-4.670	0.078	100.00	1.000	23.74	24.00	1.062	0.083	/

Head(0mm gap)													
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
Band 2 (BW: 20MHz)	1RB	Left Cheek	19100	1900.0	0.160	0.985	100.00	1.000	23.93	24.00	1.016	1.001	/
		Left Tilt	19100	1900.0	-1.330	0.710	100.00	1.000	23.93	24.00	1.016	0.721	/
		Right Cheek	18700	1860.0	0.490	0.821	100.00	1.000	23.30	23.50	1.047	0.860	/
		Right Cheek	18900	1880.0	-4.550	0.703	100.00	1.000	22.76	23.00	1.057	0.743	/
		Right Cheek	19100	1900.0	-3.120	0.998	100.00	1.000	23.93	24.00	1.016	<b>1.014</b>	9#
		Right Cheek(Repeated)	19100	1900.0	0.560	0.976	100.00	1.000	23.93	24.00	1.016	0.992	/
	50%RB	Right Tilt	19100	1900.0	2.790	0.869	100.00	1.000	23.93	24.00	1.016	0.883	/
		Left Cheek	19100	1900.0	-4.630	0.870	100.00	1.000	23.14	23.50	1.086	0.945	/
		Left Tilt	19100	1900.0	1.290	0.601	100.00	1.000	23.14	23.50	1.086	0.653	/
		Right Cheek	19100	1900.0	-0.430	0.932	100.00	1.000	23.14	23.50	1.086	1.012	/
		Right Tilt	19100	1900.0	0.670	0.638	100.00	1.000	23.14	23.50	1.086	0.693	/
Body(hotspot open, 10mm Gap)													
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
Band 2 (BW: 20MHz)	1RB	Front	19100	1900.0	-1.560	0.696	100.00	1.000	23.93	24.00	1.016	<b>0.707</b>	10#
		Back	19100	1900.0	1.460	0.538	100.00	1.000	23.93	24.00	1.016	0.547	/
		Right	19100	1900.0	0.160	0.412	100.00	1.000	23.93	24.00	1.016	0.419	/
		Bottom	19100	1900.0	2.440	0.605	100.00	1.000	23.93	24.00	1.016	0.615	/
	50%RB	Front	19100	1900.0	-3.280	0.611	100.00	1.000	23.14	23.50	1.086	0.664	/
		Back	19100	1900.0	1.790	0.487	100.00	1.000	23.14	23.50	1.086	0.529	/
		Right	19100	1900.0	2.360	0.374	100.00	1.000	23.14	23.50	1.086	0.406	/
		Bottom	19100	1900.0	-4.750	0.563	100.00	1.000	23.14	23.50	1.086	0.611	/

Head(0mm gap)													
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
Band 4 (BW: 20MHz)	1RB	Left Cheek	20175	1732.5	1.420	0.976	100.00	1.000	23.89	24.00	1.026	1.001	/
		Left Tilt	20175	1732.5	-0.770	0.793	100.00	1.000	23.89	24.00	1.026	0.814	/
		Right Cheek	20050	1720.0	2.780	0.855	100.00	1.000	23.07	23.50	1.104	0.944	/
		Right Cheek	20175	1732.5	1.640	1.012	100.00	1.000	23.89	24.00	1.026	<b>1.038</b>	11#
		Right Cheek	20300	1745.0	3.150	0.847	100.00	1.000	23.04	23.50	1.112	0.942	/
		Right Cheek(Repeated)	20175	1732.5	-1.940	0.992	100.00	1.000	23.89	24.00	1.026	1.018	/
	50%RB	Right Tilt	20175	1732.5	0.600	0.815	100.00	1.000	23.89	24.00	1.026	0.836	/
		Left Cheek	20175	1732.5	-1.560	0.926	100.00	1.000	23.22	23.50	1.067	0.988	/
		Left Tilt	20175	1732.5	2.790	0.588	100.00	1.000	23.22	23.50	1.067	0.627	/
		Right Cheek	20175	1732.5	-0.840	0.968	100.00	1.000	23.22	23.50	1.067	1.033	/
		Right Tilt	20175	1732.5	-2.450	0.623	100.00	1.000	23.22	23.50	1.067	0.665	/

Body(hotspot open, 10mm Gap)													
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
Band 4 (BW: 20MHz)	1RB	Front	20050	1720.0	3.780	0.846	100.00	1.000	23.07	23.50	1.104	0.934	/
		Front	20175	1732.5	3.290	1.029	100.00	1.000	23.89	24.00	1.026	<b>1.056</b>	12#
		Front	20300	1745.0	-2.440	0.832	100.00	1.000	23.04	23.50	1.112	0.925	/
		Front(Repeated)	20175	1732.5	0.750	0.980	100.00	1.000	23.89	24.00	1.026	1.005	/
		Back	20175	1732.5	-1.470	0.913	100.00	1.000	23.89	24.00	1.026	0.937	/
		Right	20175	1732.5	0.320	0.745	100.00	1.000	23.89	24.00	1.026	0.764	/
	Bottom	20175	1732.5	-0.550	0.986	100.00	1.000	23.89	24.00	1.026	1.012	/	
	50%RB	Front	20175	1732.5	2.410	0.989	100.00	1.000	23.22	23.50	1.067	1.055	/
		Back	20175	1732.5	-3.790	0.904	100.00	1.000	23.22	23.50	1.067	0.965	/
		Right	20175	1732.5	4.130	0.689	100.00	1.000	23.22	23.50	1.067	0.735	/
Bottom		20175	1732.5	4.280	0.942	100.00	1.000	23.22	23.50	1.067	1.005	/	
Head(0mm gap)													
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
Band 5 (BW: 10MHz)	1RB	Left Cheek	20525	836.5	2.460	0.508	100.00	1.000	23.88	24.00	1.028	0.522	/
		Left Tilt	20525	836.5	1.580	0.269	100.00	1.000	23.88	24.00	1.028	0.277	/
		Right Cheek	20525	836.5	-3.550	0.574	100.00	1.000	23.88	24.00	1.028	<b>0.590</b>	13#
		Right Tilt	20525	836.5	4.960	0.297	100.00	1.000	23.88	24.00	1.028	0.305	/
	50%RB	Left Cheek	20525	836.5	0.080	0.485	100.00	1.000	23.45	23.50	1.012	0.491	/
		Left Tilt	20525	836.5	-1.840	0.240	100.00	1.000	23.45	23.50	1.012	0.243	/
		Right Cheek	20525	836.5	3.670	0.522	100.00	1.000	23.45	23.50	1.012	0.528	/
		Right Tilt	20525	836.5	-2.890	0.262	100.00	1.000	23.45	23.50	1.012	0.265	/
Body(hotspot open, 10mm Gap)													
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
Band 5 (BW: 10MHz)	1RB	Front	20525	836.5	-1.600	0.285	100.00	1.000	23.88	24.00	1.028	<b>0.293</b>	14#
		Back	20525	836.5	3.290	0.184	100.00	1.000	23.88	24.00	1.028	0.189	/
		Right	20525	836.5	-0.860	0.213	100.00	1.000	23.88	24.00	1.028	0.219	/
		Bottom	20525	836.5	3.470	0.086	100.00	1.000	23.88	24.00	1.028	0.088	/
	50%RB	Front	20525	836.5	-1.890	0.262	100.00	1.000	23.45	23.50	1.012	0.265	/
		Back	20525	836.5	2.660	0.145	100.00	1.000	23.45	23.50	1.012	0.147	/
		Right	20525	836.5	0.400	0.186	100.00	1.000	23.45	23.50	1.012	0.188	/
		Bottom	20525	836.5	4.720	0.071	100.00	1.000	23.45	23.50	1.012	0.072	/
Head(0mm gap)													
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
Band 7 (BW: 20MHz)	1RB	Left Cheek	21350	2560.0	3.820	0.496	100.00	1.000	23.83	24.00	1.040	0.516	/
		Left Tilt	21350	2560.0	-0.870	0.242	100.00	1.000	23.83	24.00	1.040	0.252	/
		Right Cheek	21350	2560.0	-1.490	0.528	100.00	1.000	23.83	24.00	1.040	<b>0.549</b>	15#
		Right Tilt	21350	2560.0	1.980	0.278	100.00	1.000	23.83	24.00	1.040	0.289	/
	50%RB	Left Cheek	21350	2560.0	2.880	0.450	100.00	1.000	23.36	23.50	1.033	0.465	/
		Left Tilt	21350	2560.0	-4.730	0.204	100.00	1.000	23.36	23.50	1.033	0.211	/
		Right Cheek	21350	2560.0	0.360	0.482	100.00	1.000	23.36	23.50	1.033	0.498	/
		Right Tilt	21350	2560.0	2.030	0.233	100.00	1.000	23.36	23.50	1.033	0.241	/
Body(hotspot open, 10mm Gap)													
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
Band 7 (BW: 20MHz)	1RB	Front	21350	2560.0	-4.920	0.317	100.00	1.000	23.83	24.00	1.040	<b>0.330</b>	16#
		Back	21350	2560.0	2.580	0.279	100.00	1.000	23.83	24.00	1.040	0.290	/
		Right	21350	2560.0	-0.920	0.153	100.00	1.000	23.83	24.00	1.040	0.159	/
		Bottom	21350	2560.0	2.360	0.291	100.00	1.000	23.83	24.00	1.040	0.303	/
	50%RB	Front	21350	2560.0	-1.860	0.298	100.00	1.000	23.36	23.50	1.033	0.308	/
		Back	21350	2560.0	3.480	0.269	100.00	1.000	23.36	23.50	1.033	0.278	/
		Right	21350	2560.0	0.200	0.135	100.00	1.000	23.36	23.50	1.033	0.139	/
		Bottom	21350	2560.0	1.070	0.278	100.00	1.000	23.36	23.50	1.033	0.287	/

Head(0mm gap)													
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
Band 13 (BW: 10MHz)	1RB	Left Cheek	23230	782.0	4.630	0.493	100.00	1.000	23.86	24.00	1.033	0.509	/
		Left Tilt	23230	782.0	-2.370	0.337	100.00	1.000	23.86	24.00	1.033	0.348	/
		Right Cheek	23230	782.0	3.420	0.511	100.00	1.000	23.86	24.00	1.033	<b>0.528</b>	17#
		Right Tilt	23230	782.0	0.490	0.379	100.00	1.000	23.86	24.00	1.033	0.392	/
	50%RB	Left Cheek	23230	782.0	-3.260	0.441	100.00	1.000	23.47	23.50	1.007	0.444	/
		Left Tilt	23230	782.0	1.640	0.331	100.00	1.000	23.47	23.50	1.007	0.333	/
		Right Cheek	23230	782.0	2.880	0.468	100.00	1.000	23.47	23.50	1.007	0.471	/
		Right Tilt	23230	782.0	-0.750	0.352	100.00	1.000	23.47	23.50	1.007	0.354	/

Body(hotspot open, 10mm Gap)													
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
Band 13 (BW: 10MHz)	1RB	Front	23230	782.0	-3.230	0.239	100.00	1.000	23.86	24.00	1.033	<b>0.247</b>	18#
		Back	23230	782.0	4.510	0.195	100.00	1.000	23.86	24.00	1.033	0.201	/
		Right	23230	782.0	2.300	0.214	100.00	1.000	23.86	24.00	1.033	0.221	/
		Bottom	23230	782.0	-0.800	0.103	100.00	1.000	23.86	24.00	1.033	0.106	/
	50%RB	Front	23230	782.0	-1.270	0.209	100.00	1.000	23.47	23.50	1.007	0.210	/
		Back	23230	782.0	1.030	0.182	100.00	1.000	23.47	23.50	1.007	0.183	/
		Right	23230	782.0	2.480	0.191	100.00	1.000	23.47	23.50	1.007	0.192	/
		Bottom	23230	782.0	3.980	0.093	100.00	1.000	23.47	23.50	1.007	0.094	/

Head(0mm gap)													
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
Band 17 (BW:10MHz)	1RB	Left Cheek	23800	711.0	2.890	0.408	100.00	1.000	23.95	24.00	1.012	0.413	/
		Left Tilt	23800	711.0	-1.450	0.201	100.00	1.000	23.95	24.00	1.012	0.203	/
		Right Cheek	23800	711.0	2.500	0.455	100.00	1.000	23.95	24.00	1.012	<b>0.460</b>	19#
		Right Tilt	23800	711.0	-1.250	0.220	100.00	1.000	23.95	24.00	1.012	0.223	/
	50%RB	Left Cheek	23800	711.0	4.980	0.354	100.00	1.000	23.27	23.50	1.054	0.373	/
		Left Tilt	23800	711.0	0.370	0.176	100.00	1.000	23.27	23.50	1.054	0.186	/
		Right Cheek	23800	711.0	2.480	0.397	100.00	1.000	23.27	23.50	1.054	0.418	/
		Right Tilt	23800	711.0	1.660	0.199	100.00	1.000	23.27	23.50	1.054	0.210	/

Body(hotspot open, 10mm Gap)													
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
Band 17 (BW:10MHz)	1RB	Front	23800	711.0	-2.080	0.264	100.00	1.000	23.95	24.00	1.012	<b>0.267</b>	20#
		Back	23800	711.0	-4.180	0.152	100.00	1.000	23.95	24.00	1.012	0.154	/
		Right	23800	711.0	3.090	0.109	100.00	1.000	23.95	24.00	1.012	0.110	/
		Bottom	23800	711.0	-0.320	0.205	100.00	1.000	23.95	24.00	1.012	0.207	/
	50%RB	Front	23800	711.0	2.880	0.237	100.00	1.000	23.27	23.50	1.054	0.250	/
		Back	23800	711.0	-1.770	0.126	100.00	1.000	23.27	23.50	1.054	0.133	/
		Right	23800	711.0	3.640	0.092	100.00	1.000	23.27	23.50	1.054	0.097	/
		Bottom	23800	711.0	0.910	0.188	100.00	1.000	23.27	23.50	1.054	0.198	/

Head(0mm gap)													
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
Band 38 (BW:20MHz)	1RB	Left Cheek	38150	2610.0	3.430	0.094	100.00	1.000	23.91	24.00	1.021	0.096	/
		Left Tilt	38150	2610.0	-0.160	0.068	100.00	1.000	23.91	24.00	1.021	0.069	/
		Right Cheek	38150	2610.0	-3.680	0.102	100.00	1.000	23.91	24.00	1.021	<b>0.104</b>	21#
		Right Tilt	38150	2610.0	2.530	0.076	100.00	1.000	23.91	24.00	1.021	0.078	/
	50%RB	Left Cheek	38150	2610.0	0.780	0.083	100.00	1.000	23.00	23.00	1.000	0.083	/
		Left Tilt	38150	2610.0	1.850	0.060	100.00	1.000	23.00	23.00	1.000	0.060	/
		Right Cheek	38150	2610.0	2.920	0.092	100.00	1.000	23.00	23.00	1.000	0.092	/
		Right Tilt	38150	2610.0	0.010	0.071	100.00	1.000	23.00	23.00	1.000	0.071	/

Body(hotspot open, 10mm Gap)													
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
Band 38 (BW:20MHz)	1RB	Front	38150	2610.0	1.820	0.095	100.00	1.000	23.91	24.00	1.021	<b>0.097</b>	22#
		Back	38150	2610.0	2.490	0.084	100.00	1.000	23.91	24.00	1.021	0.086	/
		Right	38150	2610.0	-1.220	0.065	100.00	1.000	23.91	24.00	1.021	0.066	/
		Bottom	38150	2610.0	3.740	0.090	100.00	1.000	23.91	24.00	1.021	0.092	/
	50%RB	Front	38150	2610.0	-0.700	0.092	100.00	1.000	23.00	23.00	1.000	0.092	/
		Back	38150	2610.0	4.620	0.079	100.00	1.000	23.00	23.00	1.000	0.079	/
		Right	38150	2610.0	-1.420	0.058	100.00	1.000	23.00	23.00	1.000	0.058	/
		Bottom	38150	2610.0	2.860	0.085	100.00	1.000	23.00	23.00	1.000	0.085	/

Head(0mm gap)													
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
Band 41 (BW: 20MHz)	1RB	Left Cheek	41140	2645.0	3.870	0.100	100.00	1.000	23.93	24.00	1.016	0.102	/
		Left Tilt	41140	2645.0	-1.990	0.080	100.00	1.000	23.93	24.00	1.016	0.081	/
		Right Cheek	41140	2645.0	4.360	0.105	100.00	1.000	23.93	24.00	1.016	<b>0.107</b>	23#
		Right Tilt	41140	2645.0	2.760	0.087	100.00	1.000	23.93	24.00	1.016	0.088	/
	50%RB	Left Cheek	41140	2645.0	-0.750	0.089	100.00	1.000	23.41	23.50	1.021	0.091	/
		Left Tilt	41140	2645.0	3.440	0.069	100.00	1.000	23.41	23.50	1.021	0.070	/
		Right Cheek	41140	2645.0	2.950	0.096	100.00	1.000	23.41	23.50	1.021	0.098	/
		Right Tilt	41140	2645.0	2.130	0.074	100.00	1.000	23.41	23.50	1.021	0.076	/

Body(hotspot open, 10mm Gap)													
Mode	Channel Type	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
Band 41 (BW: 20MHz)	1RB	Front	41140	2645.0	2.580	0.122	100.00	1.000	23.93	24.00	1.016	<b>0.124</b>	24#
		Back	41140	2645.0	4.840	0.094	100.00	1.000	23.93	24.00	1.016	0.096	/
		Right	41140	2645.0	-0.750	0.076	100.00	1.000	23.93	24.00	1.016	0.077	/
		Bottom	41140	2645.0	3.240	0.105	100.00	1.000	23.93	24.00	1.016	0.107	/
	50%RB	Front	41140	2645.0	-1.660	0.111	100.00	1.000	23.41	23.50	1.021	0.113	/
		Back	41140	2645.0	0.430	0.090	100.00	1.000	23.41	23.50	1.021	0.092	/
		Right	41140	2645.0	2.190	0.067	100.00	1.000	23.41	23.50	1.021	0.068	/
		Bottom	41140	2645.0	0.280	0.098	100.00	1.000	23.41	23.50	1.021	0.100	/

Head(0mm gap)												
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
2.4g (2.4~2.4835) 802.11b	Left Cheek	11	2462	1.230	0.391	100.00	1.000	19.98	20.00	1.005	0.393	/
	Left Tilt	11	2462	-1.820	0.189	100.00	1.000	19.98	20.00	1.005	0.190	/
	Right Cheek	11	2462	-4.990	0.408	100.00	1.000	19.98	20.00	1.005	<b>0.410</b>	25#
	Right Tilt	11	2462	-2.400	0.207	100.00	1.000	19.98	20.00	1.005	0.208	/

Body(hotspot open, 10mm Gap)												
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
2.4g (2.4~2.4835) 802.11b	Front	11	2462	-4.440	0.170	100.00	1.000	19.98	20.00	1.005	<b>0.171</b>	26#
	Back	11	2462	-2.050	0.128	100.00	1.000	19.98	20.00	1.005	0.129	/
	Left	11	2462	1.120	0.109	100.00	1.000	19.98	20.00	1.005	0.110	/
	Top	11	2462	3.830	0.152	100.00	1.000	19.98	20.00	1.005	0.153	/

Head(0mm gap)												
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
2.4g (2.4~2.4835) 802.11n(HT40)	Left Cheek	9	2452	3.290	0.331	100.00	1.000	22.44	22.50	1.014	0.336	/
	Left Tilt	9	2452	-2.650	0.155	100.00	1.000	22.44	22.50	1.014	0.157	/
	Right Cheek	9	2452	3.470	0.352	100.00	1.000	22.44	22.50	1.014	<b>0.357</b>	/
	Right Tilt	9	2452	0.270	0.175	100.00	1.000	22.44	22.50	1.014	0.177	/

Body(hotspot open, 10mm Gap)												
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
2.4g (2.4~2.4835) 802.11n(HT40)	Front	9	2452	0.150	0.148	100.00	1.000	22.44	22.50	1.014	<b>0.150</b>	/
	Back	9	2452	4.770	0.116	100.00	1.000	22.44	22.50	1.014	0.118	/
	Left	9	2452	-2.850	0.099	100.00	1.000	22.44	22.50	1.014	0.100	/
	Top	9	2452	1.690	0.132	100.00	1.000	22.44	22.50	1.014	0.134	/

Head(0mm gap)												
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
U-NII-1 (5.150~5.250) 802.11ac(VHT20)	Left Cheek	48	5240	4.390	0.145	100.00	1.000	16.61	17.00	1.094	0.159	/
	Left Tilt	48	5240	-0.540	0.096	100.00	1.000	16.61	17.00	1.094	0.105	/
	Right Cheek	48	5240	-3.480	0.166	100.00	1.000	16.61	17.00	1.094	<b>0.182</b>	27#
	Right Tilt	48	5240	3.250	0.106	100.00	1.000	16.61	17.00	1.094	0.116	/

Body(hotspot open, 10mm Gap)												
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
U-NII-1 (5.150~5.250) 802.11ac(VHT20)	Front	48	5240	-4.850	0.130	100.00	1.000	16.61	17.00	1.094	<b>0.142</b>	28#
	Back	48	5240	2.330	0.116	100.00	1.000	16.61	17.00	1.094	0.127	/
	Left	48	5240	0.510	0.082	100.00	1.000	16.61	17.00	1.094	0.090	/
	Top	48	5240	1.290	0.097	100.00	1.000	16.61	17.00	1.094	0.106	/

Head(0mm gap)												
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
U-NII-3 (5.725~5.850) 802.11n(HT20)	Left Cheek	149	5745	2.060	0.201	100.00	1.000	16.07	16.50	1.104	0.222	/
	Left Tilt	149	5745	-1.740	0.102	100.00	1.000	16.07	16.50	1.104	0.113	/
	Right Cheek	149	5745	-4.900	0.246	100.00	1.000	16.07	16.50	1.104	<b>0.272</b>	29#
	Right Tilt	149	5745	3.990	0.129	100.00	1.000	16.07	16.50	1.104	0.142	/

Body(hotspot open, 10mm Gap)												
Mode	Position	Ch.	Freq. (MHz)	Power Drift (%)	1g Meas SAR (W/kg)	Duty cycle (%)	Duty cycle Factor	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	1g Scaled SAR (W/kg)	Meas. No.
U-NII-3 (5.725~5.850) 802.11n(HT20)	Front	149	5745	-2.940	0.133	100.00	1.000	16.07	16.50	1.104	<b>0.147</b>	30#
	Back	149	5745	3.770	0.104	100.00	1.000	16.07	16.50	1.104	0.115	/
	Left	149	5745	2.960	0.071	100.00	1.000	16.07	16.50	1.104	0.078	/
	Top	149	5745	1.110	0.087	100.00	1.000	16.07	16.50	1.104	0.096	/

Note:

- The maximum SAR Value of each test band is marked bold.
- SAR plot is provided only for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination.
- Per KDB 447498 D04 v01, for each exposure position, if the highest output power channel Reported SAR  $\leq 0.8W/kg$ , other channels SAR testing is not necessary.
- Per KDB 447498 D04 v01, head/body-worn use is evaluated with the device positioned at 0mm/10 mm from a head/flat phantom respectively filled with head tissue-equivalent medium.
- Per KDB Publication 941225 D06 where SAR test considerations for handsets (L x W  $\geq 9$  cm x 5 cm) are based on a composite test separation distance of 10 mm from the front, back and edges of the device with antennas 2.5 cm or closer to the edge of the device, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.
- Per KDB 447498 D04 v01, the report SAR is measured SAR value adjusted for maximum tune-up tolerance. Scaling Factor =  $10^{[(\text{tune-up limit power (dBm)} - \text{Ave. power power (dBm)})/10]}$ , where tune-up limit is the maximum rated power among all production units.  
Reported SAR(W/kg) = Measured SAR (W/kg) \* Scaling Factor.

## 11. SAR Measurement Variability

According to KDB 865664 D01, SAR measurement variability was assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. Alternatively, if the highest measured SAR for both head and body tissue-equivalent media are  $\leq 1.45$  W/kg and the ratio of these highest SAR values, i.e., largest divided by smallest value, is  $\leq 1.10$ , the highest SAR configuration for either head or body tissue-equivalent medium may be used to perform the repeated measurement. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR repeated measurement procedure:

1. When the highest measured SAR is  $< 0.80$  W/kg, repeated measurement is not required.
2. When the highest measured SAR is  $\geq 0.80$  W/kg, repeat that measurement once.
3. If the ratio of largest to smallest SAR for the original and first repeated measurements is  $> 1.20$ , or when the original or repeated measurement is  $\geq 1.45$  W/kg, perform a second repeated measurement.
4. If the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ , and the original, first or second repeated measurement is  $\geq 1.5$  W/kg, perform a third repeated measurement.

Note: For 1g SAR, the highest measured 1g SAR is  $1.029 > 0.80$  W/kg, repeated measurement is as below.

Mode	Position	Ch.	Freq. (MHz)	1g Meas SAR (W/kg)	the ratio of largest to smallest SAR for the original and first repeated measurements
LTE Band 2 (BW: 20MHz)	Right Cheek	19100	1900.0	0.998	1.023
	Right Cheek(Repeated)	19100	1900.0	0.976	
LTE Band 4 (BW: 20MHz)	Right Cheek	20175	1732.5	1.012	1.020
	Right Cheek(Repeated)	20175	1732.5	0.992	
LTE Band 4 (BW: 20MHz)	Front	20175	1732.5	1.029	1.050
	Front(Repeated)	20175	1732.5	0.980	

According to the above ratio result, we don't need to perform a second repeated measurement for these bands.



## 12. Simultaneous Transmission

Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneous transmitting antenna. When the sum of SAR 1g of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit (SAR 1g 1.6 W/kg), the simultaneous transmission SAR is not required. When the sum of SAR 1g is greater than the SAR limit (SAR 1g 1.6 W/kg), SAR test exclusion is determined by the SAR to Peak Location Ratio (SPLSR).

### 12.1 Simultaneous Transmission Mode Considerations

Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneous transmitting antenna. The device has 2 Tx antennas, WWAN main antenna, Wifi/BT antenna supports 2.4G/5G Wi-Fi and BT. The 2 antennas can always transmit simultaneously. The work mode combination is showed as below table.

Application Simultaneous Transmission information:

NO.	Configuration	Head	Body-worn
1	WWAN+WIFI(2.4g)	Yes	Yes
2	WWAN+WIFI(5g)	Yes	Yes
3	WWAN+BT	Yes	Yes

### 12.2 Sum SAR of Simultaneous Transmission

Head

Band	Channel Type	Test Position	Scaled				Σ SAR (W/kg) WWAN + WIFI 2.4G	Σ SAR (W/kg) WWAN + WIFI 5G MAX	Σ SAR (W/kg) WWAN + BT	SPLSR	Remark
			WWAN	WIFI 2.4G	WIFI 5G MAX	Bluetooth					
LTE Band 4	1RB	Left Cheek	1.001	0.393	0.222	0.059	1.394	1.223	1.060	N/A	N/A
		Left Tilt	0.814	0.190	0.113	0.059	1.004	0.927	0.873	N/A	N/A
		Right Cheek	1.038	0.410	0.272	0.059	<b>1.448</b>	1.310	1.097	N/A	N/A
		Right Tilt	0.836	0.208	0.142	0.059	1.044	0.978	0.895	N/A	N/A
	50%RB	Left Cheek	0.988	0.393	0.222	0.059	1.381	1.210	1.047	N/A	N/A
		Left Tilt	0.627	0.190	0.113	0.059	0.817	0.740	0.686	N/A	N/A
		Right Cheek	1.033	0.410	0.272	0.059	1.443	1.305	1.092	N/A	N/A
		Right Tilt	0.665	0.208	0.142	0.059	0.873	0.807	0.724	N/A	N/A

Hotspot(body-worn)

Band	Channel Type	Test Position	Scaled				Σ SAR (W/kg) WWAN + WIFI 2.4G	Σ SAR (W/kg) WWAN + WIFI 5G MAX	Σ SAR (W/kg) WWAN + BT	SPLSR	Remark
			WWAN	WIFI 2.4G	WIFI 5G MAX	Bluetooth					
LTE Band 4	1RB	Front	1.056	0.171	0.147	0.029	<b>1.227</b>	1.203	1.085	N/A	N/A
		Back	0.937	0.129	0.115	0.029	1.066	1.052	0.966	N/A	N/A
		Left	/	0.110	0.078	0.029	0.110	0.078	0.029	N/A	N/A
		Right	0.764	/	/	/	0.764	0.764	0.764	N/A	N/A
		Top	0	0.153	0.096	0.029	0.153	0.096	0.029	N/A	N/A
		Bottom	1.012	/	/	/	1.012	1.012	1.012	N/A	N/A
	50%RB	Front	1.055	0.171	0.147	0.029	1.226	1.202	1.084	N/A	N/A
		Back	0.965	0.129	0.115	0.029	1.094	1.080	0.994	N/A	N/A
		Left	/	0.110	0.078	0.029	0.110	0.078	0.029	N/A	N/A
		Right	0.735	/	/	/	0.735	0.735	0.735	N/A	N/A
		Top	/	0.153	0.096	0.029	0.153	0.096	0.029	N/A	N/A
		Bottom	1.005	/	/	/	1.005	1.005	1.005	N/A	N/A

### 13. Test Equipment List

Description	Manufacturer	Model	Serial No./Version	Cal. Date	Cal. Due
E-Field Probe	MVG	SSE2	04/22 EPG0365	2024/02/06	2025/02/05
6 1/2 Digital Multimeter	Keithley	DMM6500	4527164	2023/11/16	2024/11/15
Wideband Radio Communication Tester	ROHDE & SCHWARZ	CMW500	161997	2023/11/16	2024/11/15
MXG Vector Signal Generator	Agilent	N5182A	MY46240163	2023/11/16	2024/11/15
E-Series Avg. Power Sensor	KEYSIGHT	E9300A	MY55050017	2024/03/20	2025/03/19
EPM Series Power Meter	KEYSIGHT	E4418B	MY41293435	2024/03/20	2025/03/19
10dB Attenuator	MIDWEST MICROWAVE	263-10dB	/	2024/03/20	2025/03/19
Coupler	MERRIMAC	CWM-10R-10.8G	LOT-83391	2024/03/20	2025/03/19
750MHz Validation Dipole	MVG	SID750	07/22 DIP 0G750-655	2023/02/06	2025/02/05
835MHz Validation Dipole	MVG	SID835	07/22 DIP 0G835-656	2023/02/06	2025/02/05
1800MHz Validation Dipole	MVG	SID1800	07/22 DIP 1G800-657	2023/02/06	2025/02/05
1900MHz Validation Dipole	MVG	SID1900	07/22 DIP 1G900-658	2023/02/06	2025/02/05
2450MHz Validation Dipole	MVG	SID2450	07/22 DIP 2G450-662	2023/02/06	2025/02/05
2600MHz Validation Dipole	MVG	SID2600	07/22 DIP 2G600-663	2023/02/06	2025/02/05
5200MHz-5800MHz Validation Dipole	MVG	SID5000	07/22 DIP5G000-670	2023/02/06	2025/02/05
LIMESAR Dielectric Probe	MVG	SCLMP	06/22 OCPG88	2024/02/02	2025/02/01
ENA Series Network Analyzer	Agilent	E5071B	MY42301221	2023/11/16	2024/11/15
Thermometer	Riters	DT-232	21A11	2024/03/20	2025/03/19
Antenna network emulator	MVG	ANTA 74	07/22 ANTA 74	/	/
SAM Phantom	MVG	SAM	07/22 SAM149	/	/
Mobile Phone Positioning System	MVG	MSH 118	07/22 MSH 118	/	/
Mechanical Calibration Kit	PNA	50Ω 35mm 9G	BTF-EM-068	2023/11/16	2024/11/15
Open SAR test software	MVG	/	V5.3.5	/	/

Note: For dipole antennas, BTF has adopted 3 years as calibration intervals, and on annual basis, every measurement dipole has been evaluated and is in compliance with the following criteria:

1. There is no physical damage on the dipole;
2. System validation with specific dipole is within 10% of calibrated value;
3. Return-loss in within 20% of calibrated measurement.
4. Impedance (real or imaginary parts) in within 5 Ohms of calibrated measurement.

## ANNEX A Simulating Liquid Verification Result

The dielectric parameters of the liquids were verified prior to the SAR evaluation using an SCLMP Dielectric Probe Kit.

Dielectric performance of tissue simulating liquid									
Frequency (MHz)	$\epsilon_r$		$\sigma$ (s/m)		Delta ( $\epsilon_r$ )	Delta ( $\sigma$ )	Limit	Temp (°C)	Date
	Target	Measured	Target	Measured					
750	41.90	41.80	0.89	0.86	0.24%	3.37%	±5%	20.0	2/7/2024
835	41.50	41.41	0.90	0.87	0.22%	3.33%	±5%	20.0	4/7/2024
1800	40.00	39.91	1.40	1.37	0.23%	2.14%	±5%	20.0	8/7/2024
1900	40.00	39.88	1.40	1.41	0.30%	-0.71%	±5%	20.0	10/7/2024
2450	39.20	39.08	1.80	1.81	0.31%	-0.56%	±5%	20.0	12/7/2024
2600	39.00	38.88	1.96	1.97	0.31%	-0.51%	±5%	20.0	16/7/2024
5200	36.00	35.88	4.66	4.70	0.33%	-0.86%	±5%	20.0	18/7/2024
5800	35.30	35.18	5.27	5.31	0.34%	-0.76%	±5%	20.0	18/7/2024

NOTE: The dielectric parameters of the tissue-equivalent liquid should be measured under similar ambient conditions and within 2 °C of the conditions expected during the SAR evaluation to satisfy protocol requirements.

## ANNEX B System Check Result

Comparing to the original SAR value provided by MVG, the validation data should be within its specification of 10 % (for 10 g).

Frequency (MHz)	Input Power (mW)	10g SAR (W/Kg)	1g SAR (W/Kg)	10g SAR 1W input power normalized (W/Kg)	1g SAR 1W input power normalized (W/Kg)	10g SAR Standard target (1W) (W/Kg)	1g SAR Standard target (1W) (W/Kg)	1g SAR Deviation	10g SAR Deviation
750	16	0.092	0.138	5.75	8.63	5.55	8.49	3.60%	1.59%
835	16	0.106	0.163	6.63	10.19	6.17	9.79	7.37%	4.06%
1800	16	0.312	0.588	19.50	36.75	20.61	39.33	-5.39%	-6.56%
1900	16	0.322	0.630	20.13	39.38	20.70	40.97	-2.78%	-3.89%
2450	16	0.352	0.793	22.00	49.56	23.86	54.4	-7.80%	-8.89%
2600	16	0.421	0.866	26.31	54.13	24.48	57.14	7.49%	-5.28%
5200	13	0.288	1.019	22.15	78.38	21.29	73.88	4.06%	6.10%
5800	13	0.277	0.981	21.31	75.46	21.5	74.21	-0.89%	1.69%

## ANNEX C SAR Dipole Calibrations

### Justification for Extended SAR Dipole Calibrations


Referring to KDB 865664D01V01r04, if dipoles are verified in return loss (<-20dB, within 20% of prior calibration) and in impedance (within 5 ohm of prior calibration), the annual calibration is not necessary and the calibration interval can be extended. While calibration intervals not exceed 3 years.

### 07/22 DIP 2G450-662 SID2450 2450MHz Validation Dipole Calibrations


Frequency (MHz)	Return loss(dB)		Impedance( $\Omega$ )				error range (%)		Results (P/F)	Date of Measurement
	measurement	target	measurement		target		Return loss( $\pm 20\%$ )	Impedance( $\pm 5 \Omega$ )		
			real part	imaginary part	real part	imaginary part				
CW750	-20.92	-25.44	55.89	1.5	55.2	-1.2	-17.77%	3.4	P	2/5/2024
CW835	-29.88	-26.27	52.8	-1.7	52.5	-4.2	13.74%	2.8	P	2/5/2024
CW1800	-24.55	-26.54	52.4	-0.2	52.8	+3.8	-7.50%	4.4	P	2/5/2024
CW1900	-25.67	-23.01	51.9	-5.3	51.0	-7.0	11.56%	2.6	P	2/5/2024
CW2450	-24.37	-21.23	48.3	5.7	49.4	+8.6	14.79%	4.0	P	2/5/2024
CW2600	-20.56	-23.05	57.3	5.7	54.3	+5.5	-10.80%	3.2	P	2/5/2024
CW5200	-21.14	-20.29	58.4	-4.5	58.76	-4.43	4.19%	0.43	P	2/5/2024
CW5800	-28.88	-28.48	50.8	0.1	50.12	-3.76	1.40%	4.34	P	2/5/2024

Dipole calibration report data	Self-examination data								
<b>750MHz Dipole</b>									
<table border="1"> <thead> <tr> <th>Frequency (MHz)</th> <th>Return Loss (dB)</th> <th>Requirement (dB)</th> <th>Impedance</th> </tr> </thead> <tbody> <tr> <td>750</td> <td>-25.44</td> <td>-20</td> <td>55.2 <math>\Omega</math> - 1.2 j<math>\Omega</math></td> </tr> </tbody> </table>	Frequency (MHz)	Return Loss (dB)	Requirement (dB)	Impedance	750	-25.44	-20	55.2 $\Omega$ - 1.2 j $\Omega$	
Frequency (MHz)	Return Loss (dB)	Requirement (dB)	Impedance						
750	-25.44	-20	55.2 $\Omega$ - 1.2 j $\Omega$						
<b>835MHz Dipole</b>									
<table border="1"> <thead> <tr> <th>Frequency (MHz)</th> <th>Return Loss (dB)</th> <th>Requirement (dB)</th> <th>Impedance</th> </tr> </thead> <tbody> <tr> <td>835</td> <td>-26.27</td> <td>-20</td> <td>52.5 <math>\Omega</math> - 4.2 j<math>\Omega</math></td> </tr> </tbody> </table>	Frequency (MHz)	Return Loss (dB)	Requirement (dB)	Impedance	835	-26.27	-20	52.5 $\Omega$ - 4.2 j $\Omega$	
Frequency (MHz)	Return Loss (dB)	Requirement (dB)	Impedance						
835	-26.27	-20	52.5 $\Omega$ - 4.2 j $\Omega$						


### 1800MHz Dipole

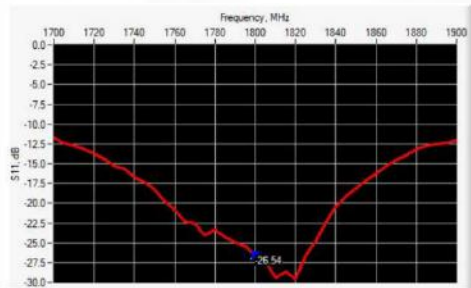


Frequency (MHz)	Return Loss (dB)	Requirement (dB)	Impedance
1800	-26.54	-20	52.8 Ω + 3.8 jΩ

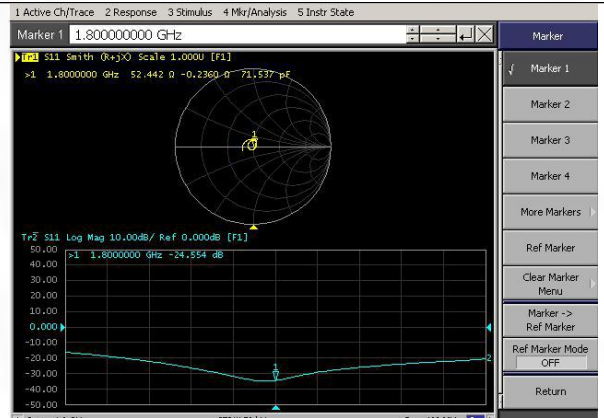


### 1900MHz Dipole

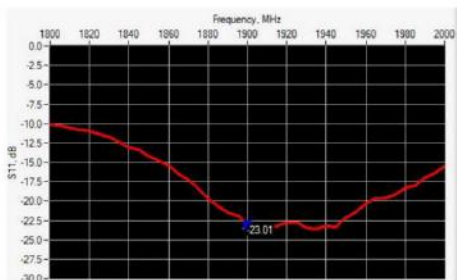


Frequency (MHz)	Return Loss (dB)	Requirement (dB)	Impedance
1900	-23.01	-20	51.0 Ω - 7.0 jΩ

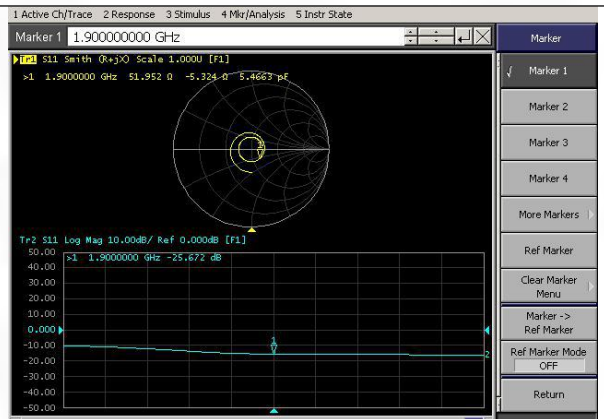


### 2450MHz Dipole

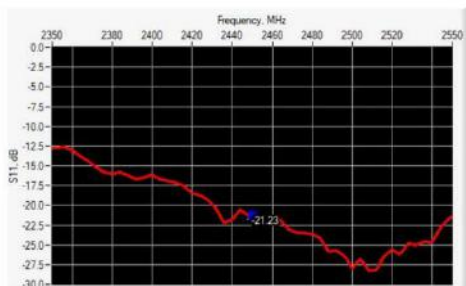


Frequency (MHz)	Return Loss (dB)	Requirement (dB)	Impedance
2450	-21.23	-20	49.4 Ω + 8.6 jΩ

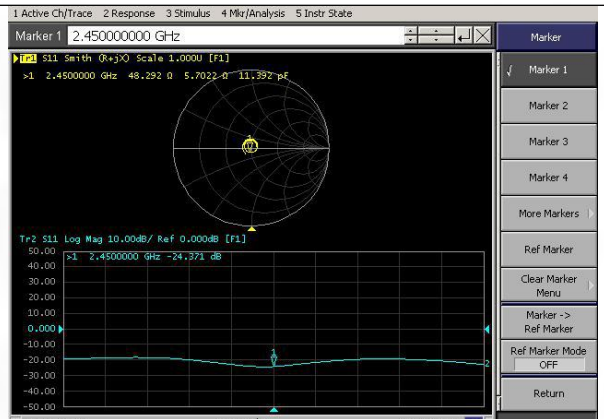

### 2600MHz Dipole

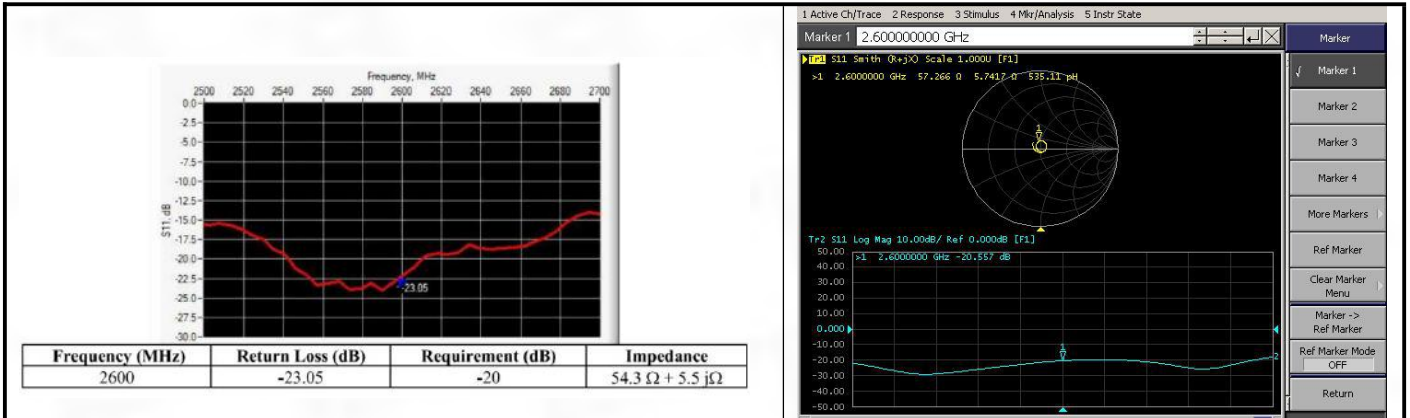

5000MHz Dipole

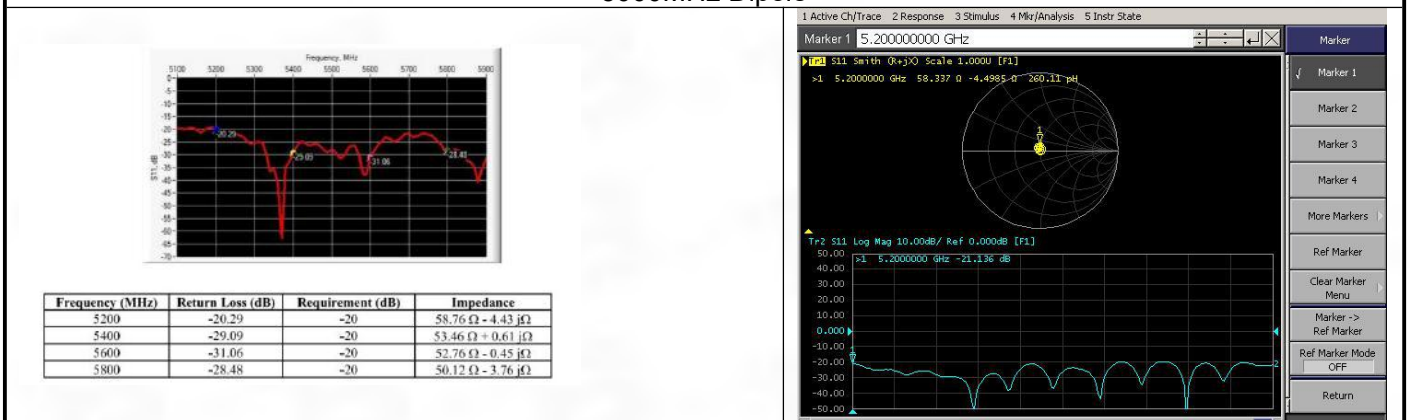

## System Performance Check Data (750 MHz)

### System check at 750 MHz

Date of measurement: 2/7/2024


#### A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	1.65
Area Scan	dx=8mm dy=8mm, Adaptive 1 max
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm, Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW750
Channels	Middle
Signal	CW

#### B. Permittivity

Frequency (MHz)	750.000
Relative permittivity (real part)	41.800
Relative permittivity (imaginary part)	21.460
Conductivity (S/m)	0.860

#### C. SAR Surface and Volume

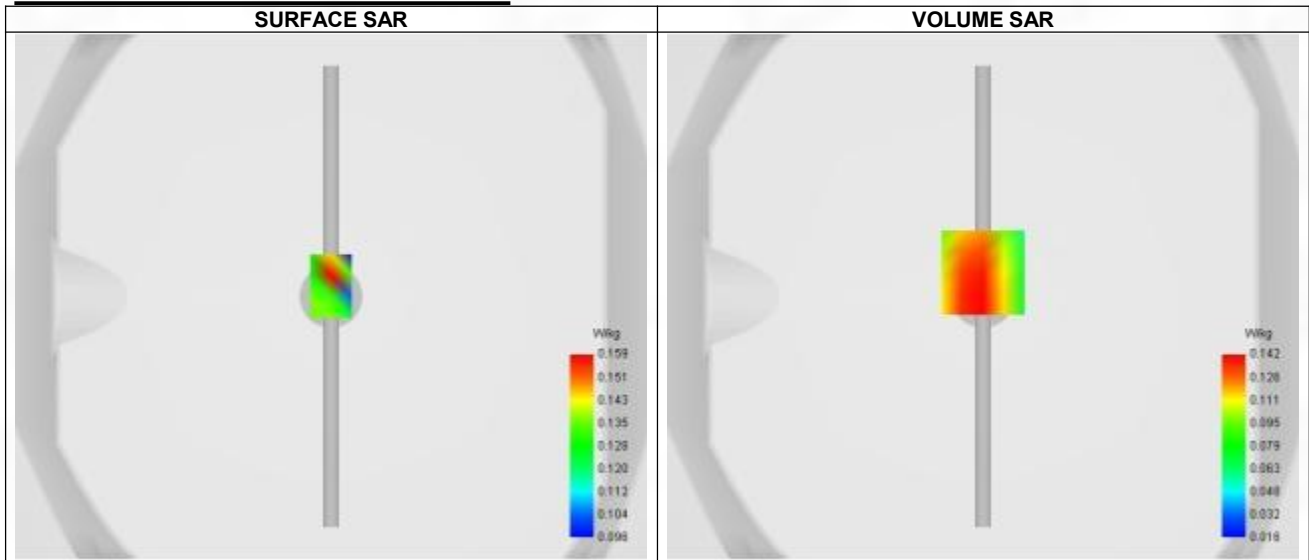


Maximum location: X=0.00, Y=9.00 ; SAR Peak: 0.20 W/kg

#### D. SAR 1g & 10g


SAR 10g (W/Kg)	0.092
SAR 1g (W/Kg)	0.138
Variation (%)	-2.190
Horizontal validation criteria: minimum distance (mm)	9.285
Vertical validation criteria: SAR ratio M2/M1 (%)	64.79%

#### E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.287	0.142	0.092	0.073	0.042

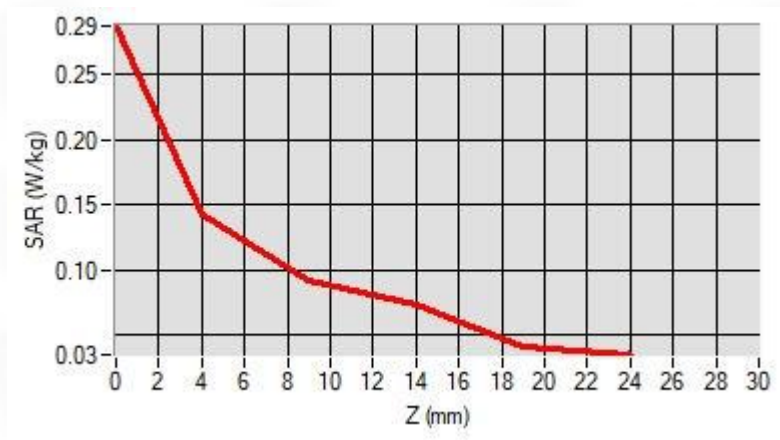

### F. 3D Image

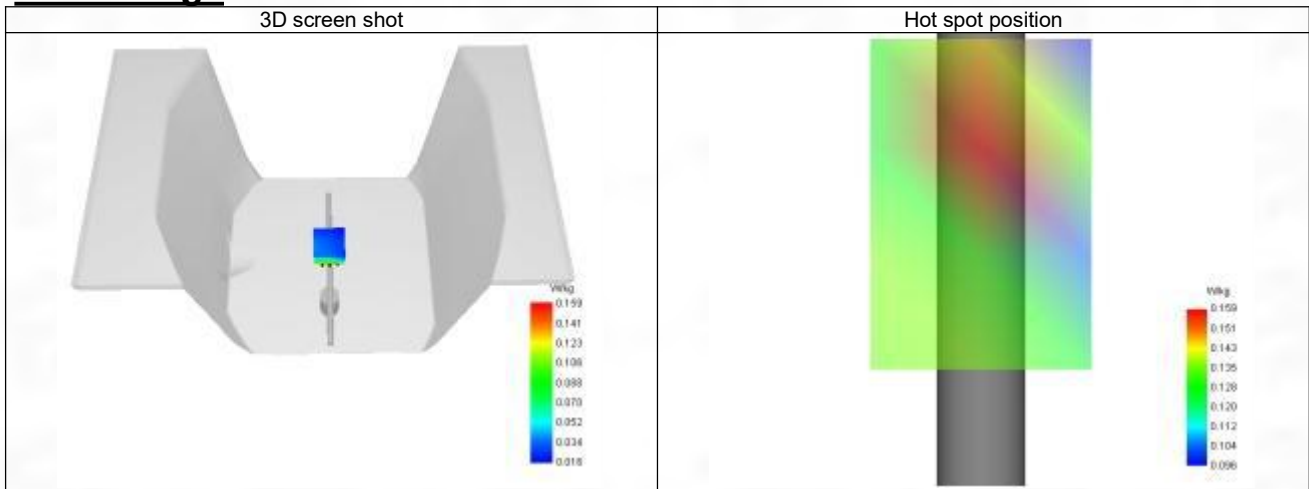



## System Performance Check Data (835 MHz)

### System check at 835 MHz

Date of measurement: 4/7/2024


#### A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	1.68
Area Scan	dx=8mm dy=8mm, Adaptive 1 max
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm, Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW835
Channels	Middle
Signal	CW

#### B. Permittivity

Frequency (MHz)	835.000
Relative permittivity (real part)	41.410
Relative permittivity (imaginary part)	19.490
Conductivity (S/m)	0.870

#### C. SAR Surface and Volume

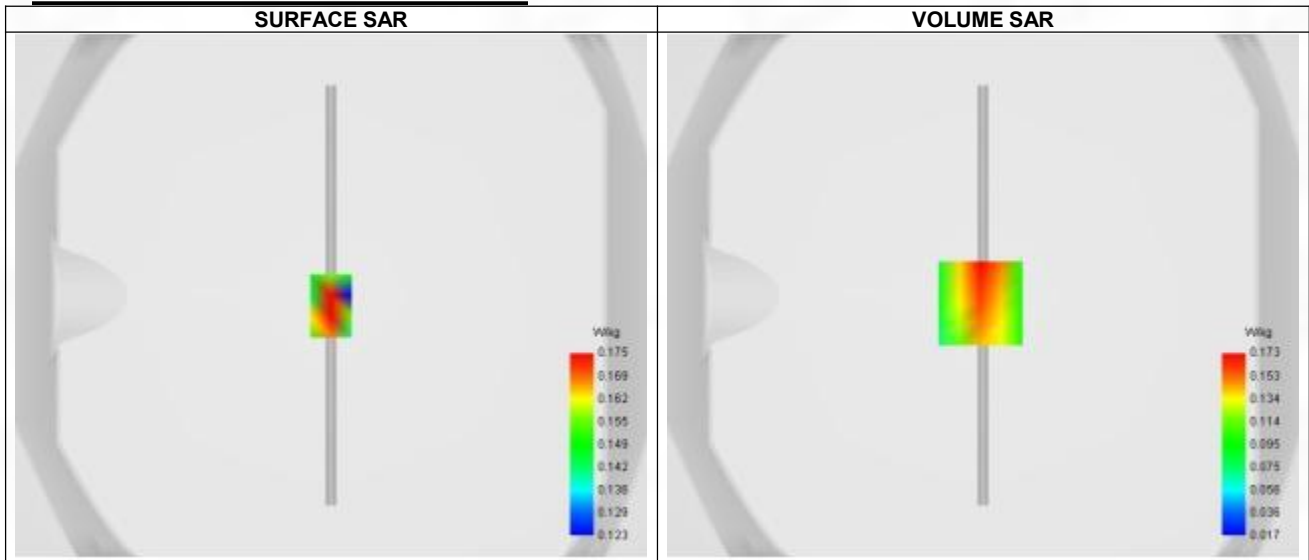


Maximum location: X=-1.00, Y=-3.00 ; SAR Peak: 0.26 W/kg

#### D. SAR 1g & 10g


SAR 10g (W/Kg)	0.106
SAR 1g (W/Kg)	0.163
Variation (%)	-3.390
Horizontal validation criteria: minimum distance (mm)	8.487
Vertical validation criteria: SAR ratio M2/M1 (%)	66.47%

#### E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.059	0.173	0.115	0.061	0.072

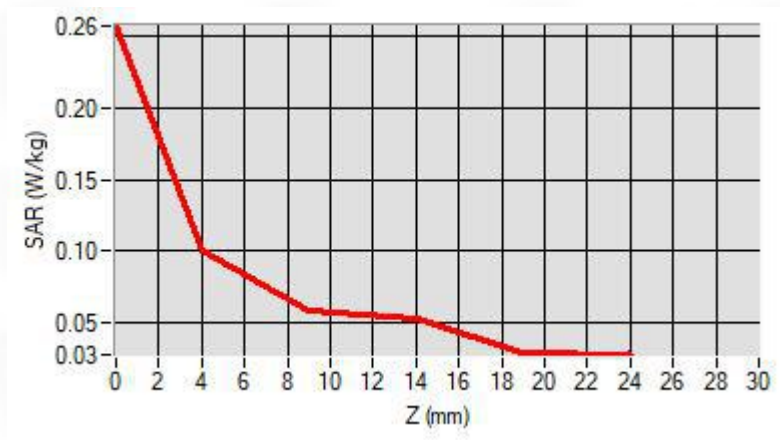

### F. 3D Image

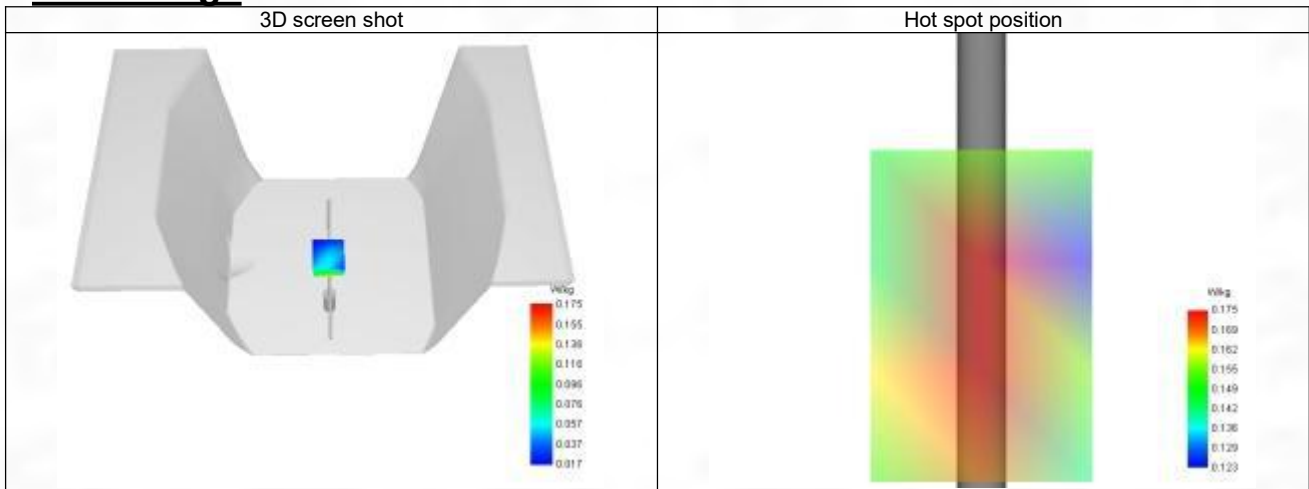

## System Performance Check Data (1800 MHz)

### System check at 1800 MHz

Date of measurement: 8/7/2024


#### A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	1.96
Area Scan	dx=8mm dy=8mm, Adaptive 1 max
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm, Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW1800
Channels	Middle
Signal	CW

#### B. Permittivity

Frequency (MHz)	1800.000
Relative permittivity (real part)	39.910
Relative permittivity (imaginary part)	14.090
Conductivity (S/m)	1.370

#### C. SAR Surface and Volume

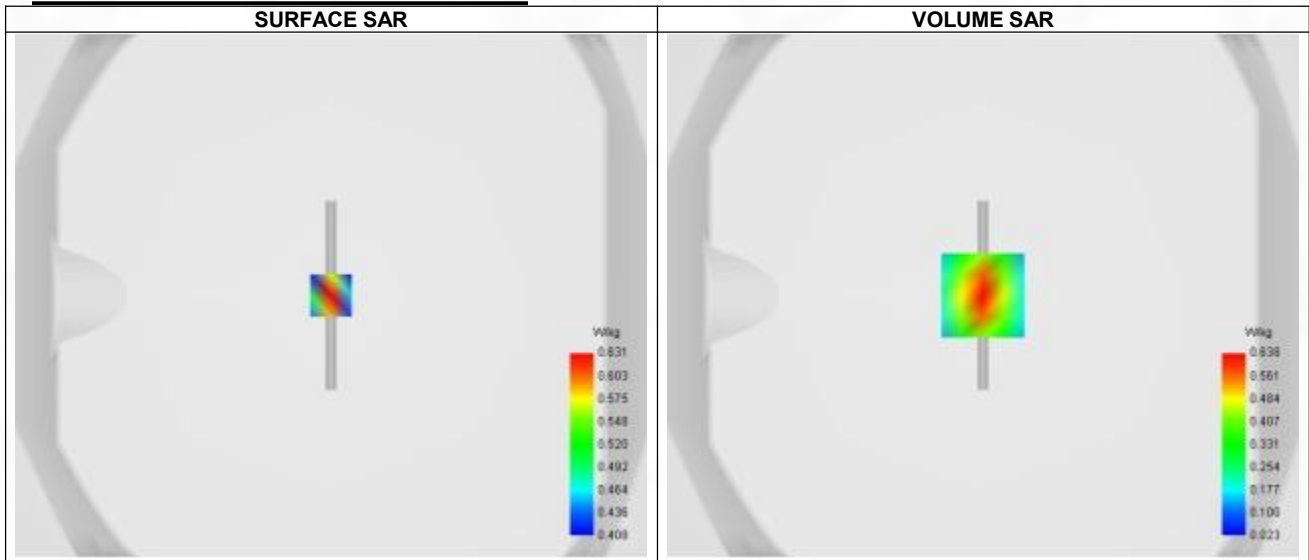


Maximum location: X=0.00, Y=0.00 ; SAR Peak: 1.00 W/kg

#### D. SAR 1g & 10g


SAR 10g (W/Kg)	0.312
SAR 1g (W/Kg)	0.588
Variation (%)	-0.250
Horizontal validation criteria: minimum distance (mm)	8.698
Vertical validation criteria: SAR ratio M2/M1 (%)	55.80%

#### E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.003	0.638	0.356	0.204	0.127

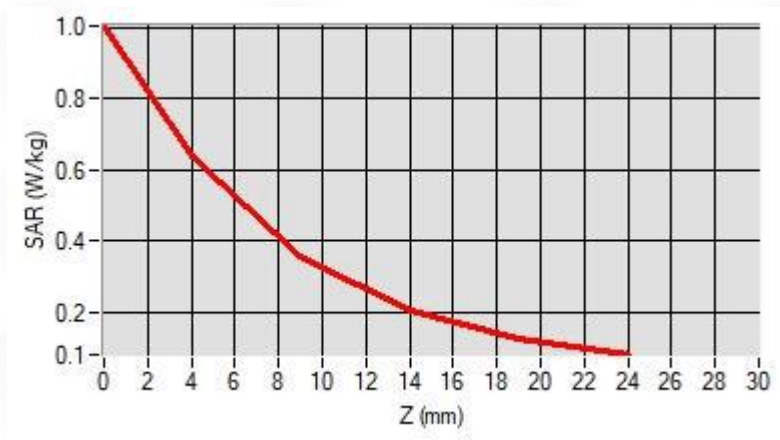

### F. 3D Image

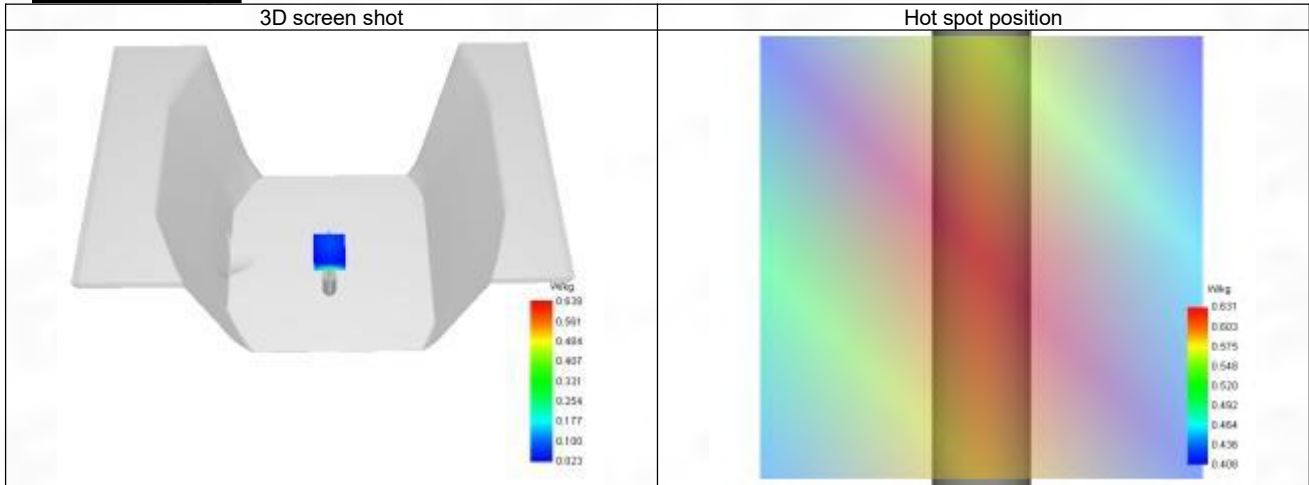

## System Performance Check Data (1900 MHz)

### System check at 1900 MHz

Date of measurement: 10/7/2024


#### A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	2.24
Area Scan	dx=8mm dy=8mm, Adaptive 1 max
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm, Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW1900
Channels	Middle
Signal	CW

#### B. Permittivity

Frequency (MHz)	1900.000
Relative permittivity (real part)	39.880
Relative permittivity (imaginary part)	13.380
Conductivity (S/m)	1.410

#### C. SAR Surface and Volume

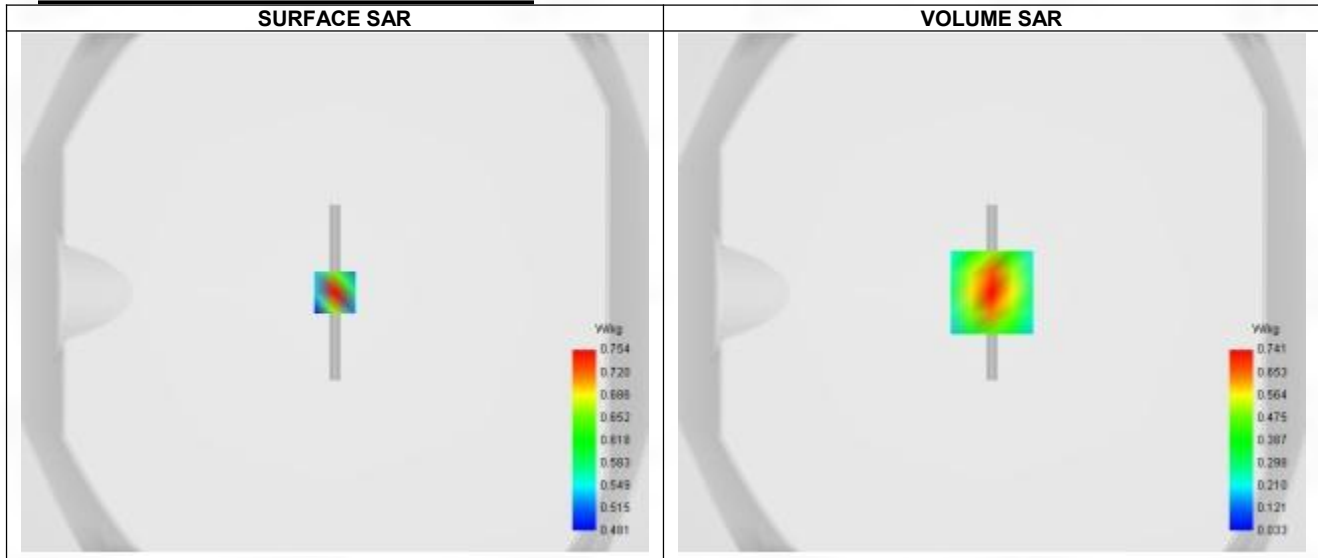


Maximum location: X=0.00, Y=0.00 ; SAR Peak: 1.18 W/kg

#### D. SAR 1g & 10g


SAR 10g (W/Kg)	0.322
SAR 1g (W/Kg)	0.630
Variation (%)	-2.080
Horizontal validation criteria: minimum distance (mm)	8.699
Vertical validation criteria: SAR ratio M2/M1 (%)	52.96%

#### E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.201	0.759	0.402	0.239	0.156

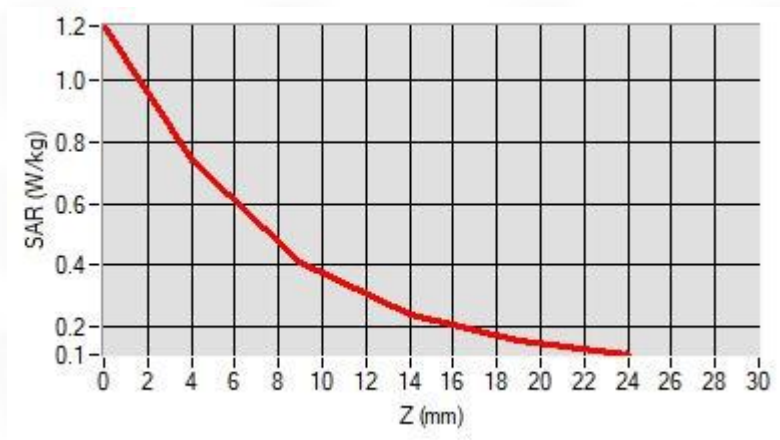

### F. 3D Image

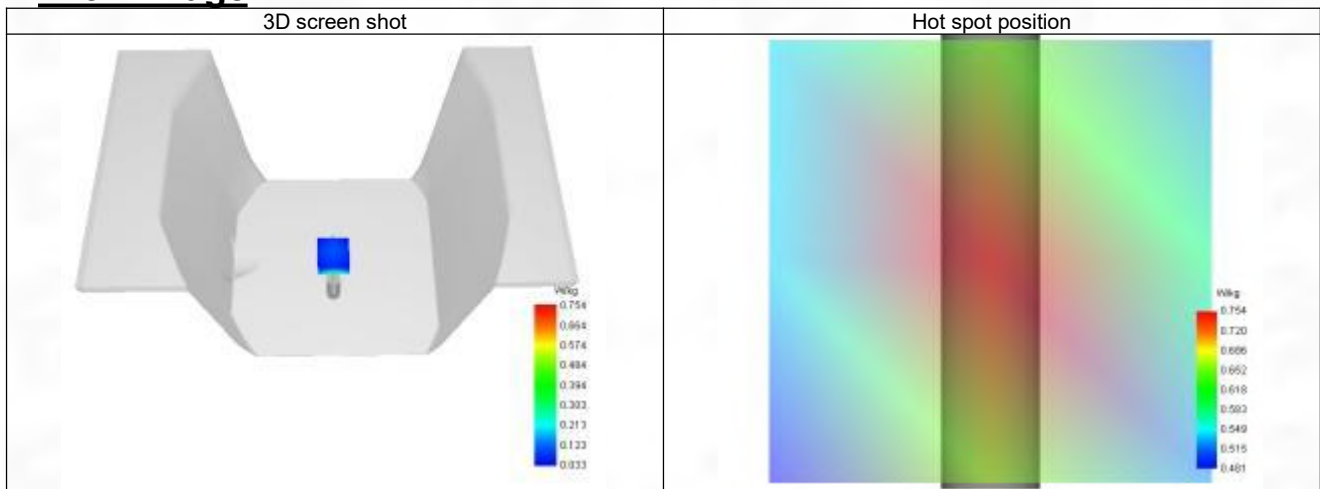

## System Performance Check Data (2450 MHz)

### System check at 2450 MHz

Date of measurement: 12/7/2024


#### A. Experimental conditions.

Probe	SN 04/22 EPGO365
ConvF	2.36
Area Scan	dx=8mm dy=8mm, Adaptive 1 max
Zoom Scan	5x5x7, dx=5mm dy=5mm dz=5mm, Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW2450
Channels	Middle
Signal	CW

#### B. Permittivity

Frequency (MHz)	2450.000
Relative permittivity (real part)	39.080
Relative permittivity (imaginary part)	13.340
Conductivity (S/m)	1.810

#### C. SAR Surface and Volume

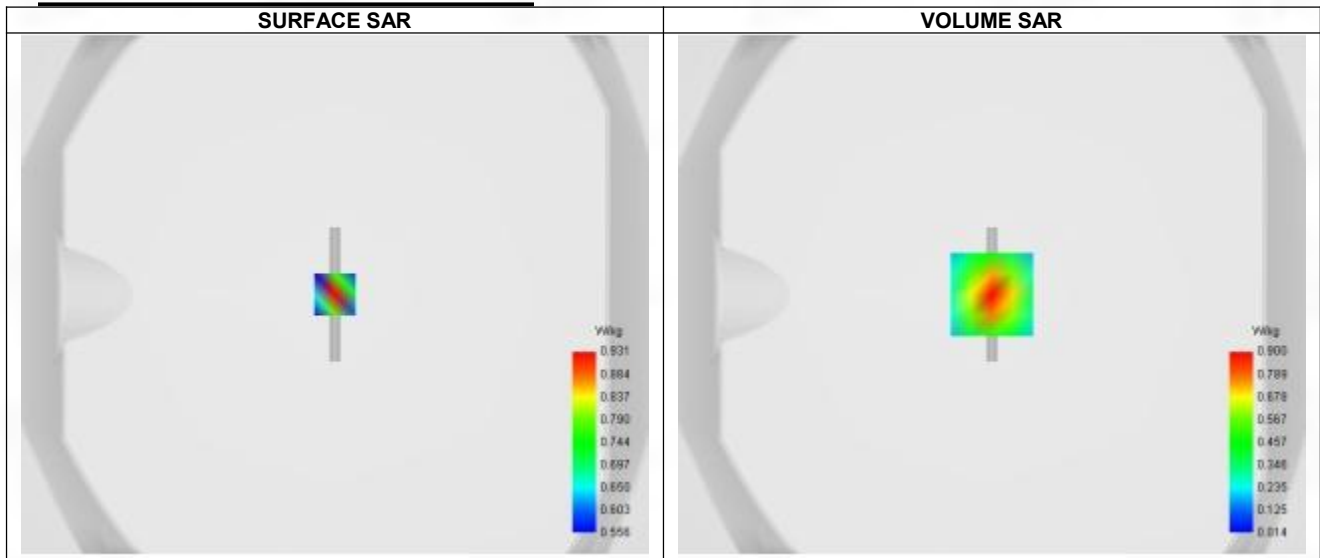


Maximum location: X=0.00, Y=0.00 ; SAR Peak: 1.47 W/kg

#### D. SAR 1g & 10g


SAR 10g (W/Kg)	0.352
SAR 1g (W/Kg)	0.793
Variation (%)	-2.570
Horizontal validation criteria: minimum distance (mm)	9.787
Vertical validation criteria: SAR ratio M2/M1 (%)	53.00%

#### E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.466	0.900	0.477	0.261	0.158

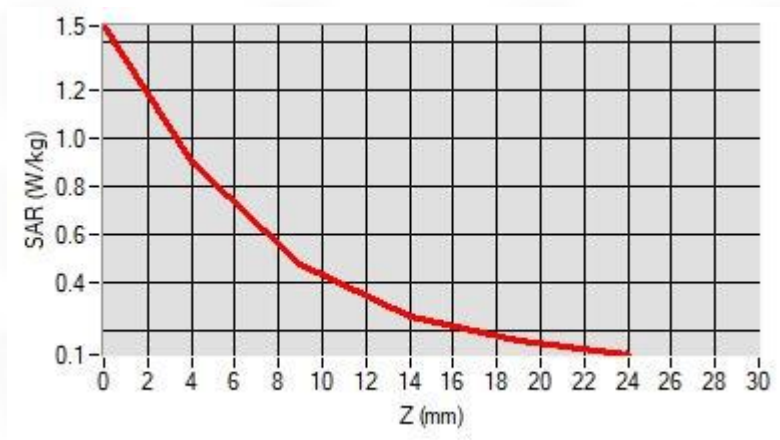

### F. 3D Image

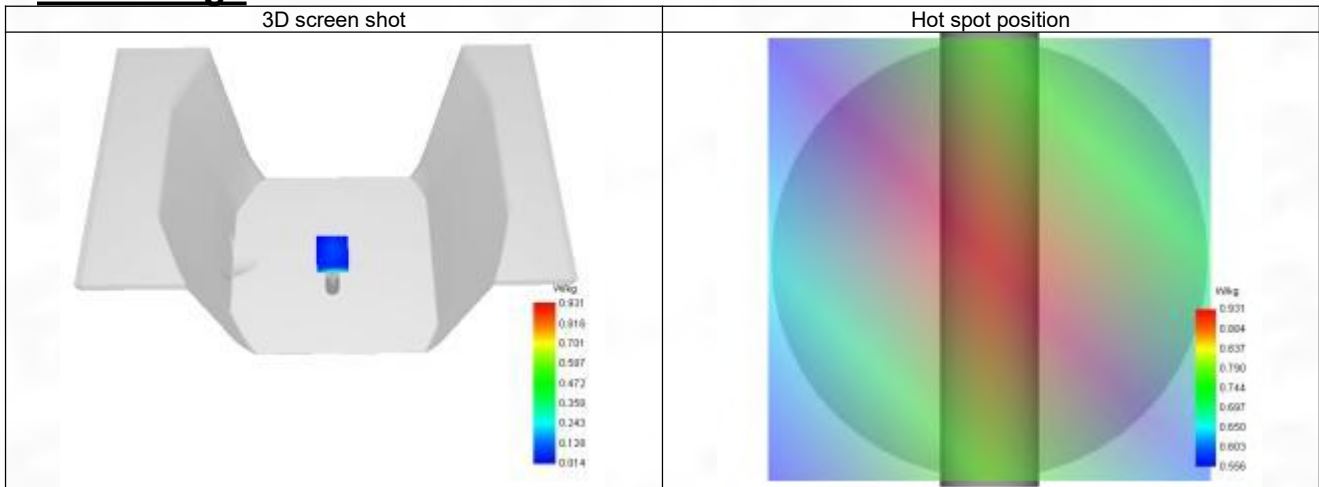



## System Performance Check Data (2600 MHz)

### System check at 2600 MHz

Date of measurement: 16/7/2024


#### A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	2.40
Area Scan	dx=8mm dy=8mm, Adaptive 1 max
Zoom Scan	5x5x7, dx=5mm dy=5mm dz=5mm, Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW2600
Channels	Middle
Signal	CW

#### B. Permittivity

Frequency (MHz)	2600.000
Relative permittivity (real part)	38.880
Relative permittivity (imaginary part)	12.690
Conductivity (S/m)	1.970

#### C. SAR Surface and Volume

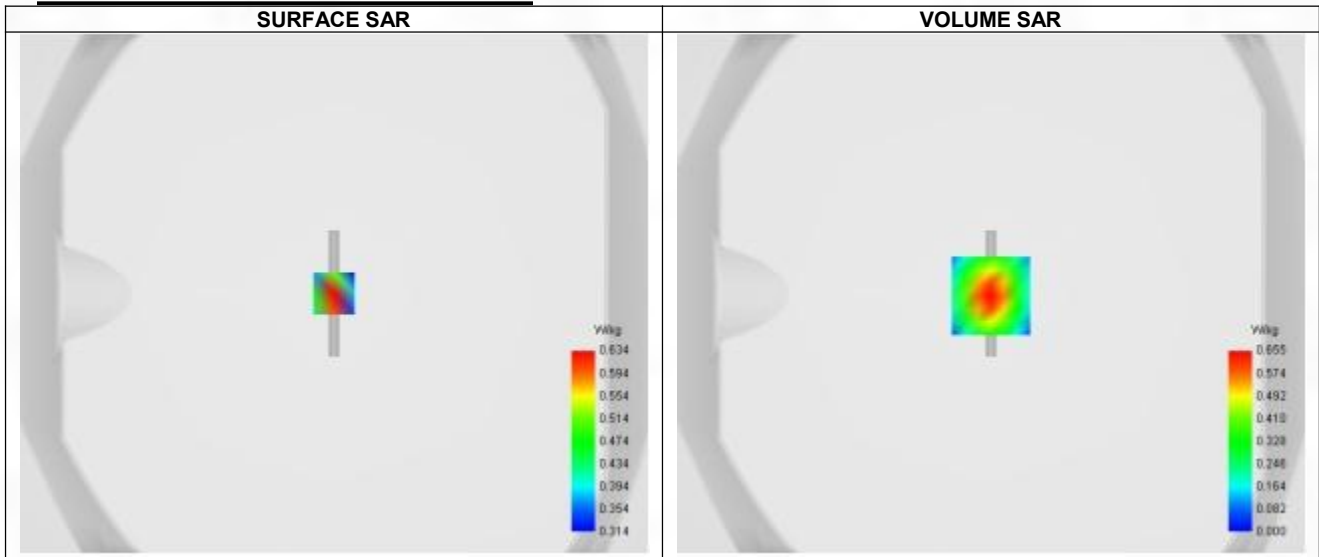


Maximum location: X=0.00, Y=-1.00 ; SAR Peak: 1.02 W/kg

#### D. SAR 1g & 10g


SAR 10g (W/Kg)	0.421
SAR 1g (W/Kg)	0.866
Variation (%)	2.980
Horizontal validation criteria: minimum distance (mm)	9.362
Vertical validation criteria: SAR ratio M2/M1 (%)	54.81%

#### E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.020	0.655	0.359	0.187	0.091

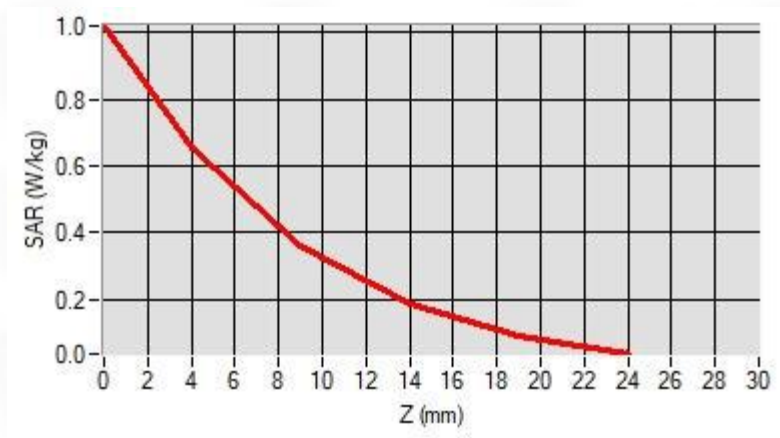

### F. 3D Image

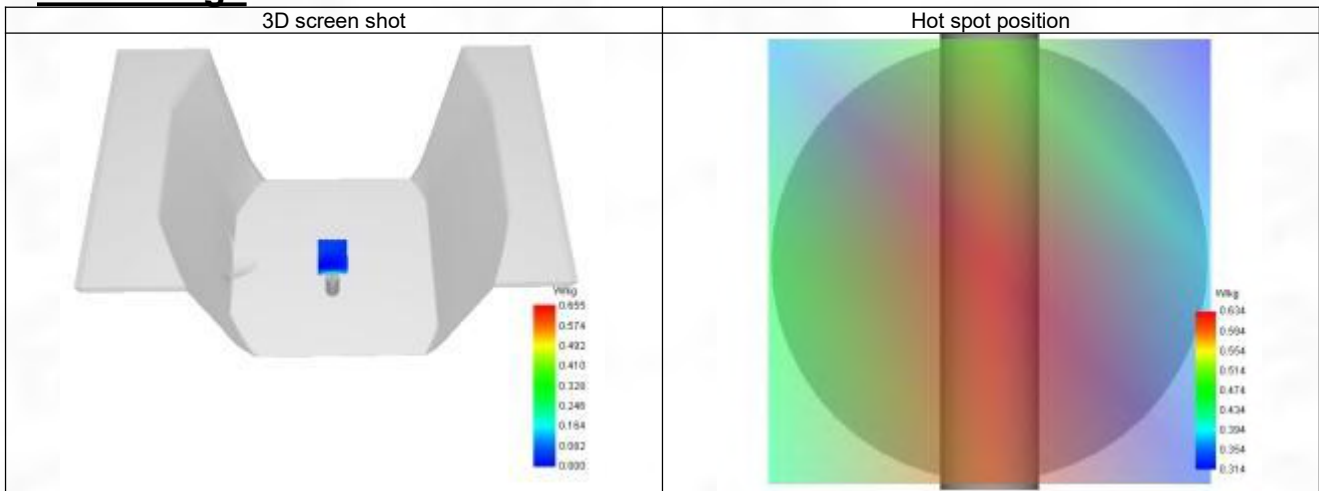

## System Performance Check Data (5200 MHz)

### System check at 5200 MHz

Date of measurement: 18/7/2024


#### A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	2.24
Area Scan	dx=8mm dy=8mm, Adaptive 1 max
Zoom Scan	7x7x12, dx=4mm dy=4mm dz=2mm, Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW5200
Channels	Middle
Signal	CW

#### B. Permittivity

Frequency (MHz)	5200.000
Relative permittivity (real part)	35.880
Relative permittivity (imaginary part)	16.250
Conductivity (S/m)	4.700

#### C. SAR Surface and Volume

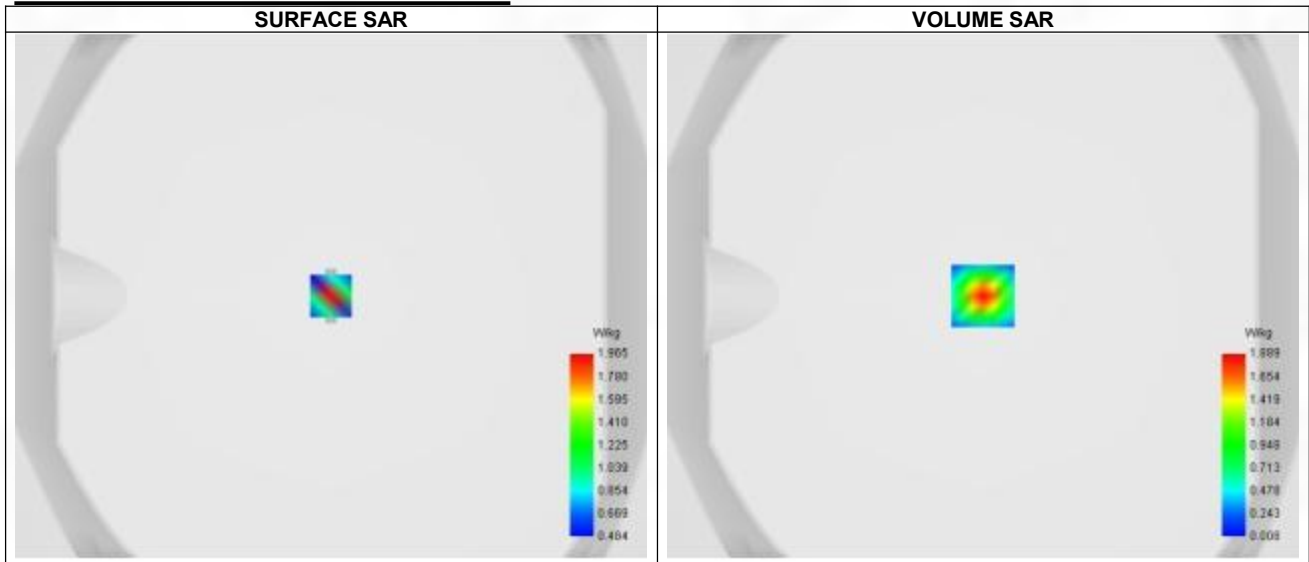


Maximum location: X=0.00, Y=0.00 ; SAR Peak: 3.38 W/kg

#### D. SAR 1g & 10g


SAR 10g (W/Kg)	0.288
SAR 1g (W/Kg)	1.019
Variation (%)	-3.400
Horizontal validation criteria: minimum distance (mm)	6.287
Vertical validation criteria: SAR ratio M2/M1 (%)	54.05%

#### E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00
SAR (W/Kg)	3.268	1.889	1.021	0.523	0.266	0.142	0.085	0.060	0.052

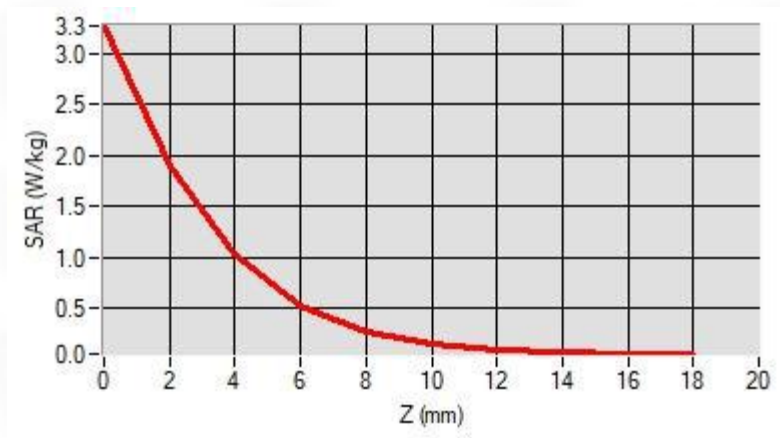

### F. 3D Image

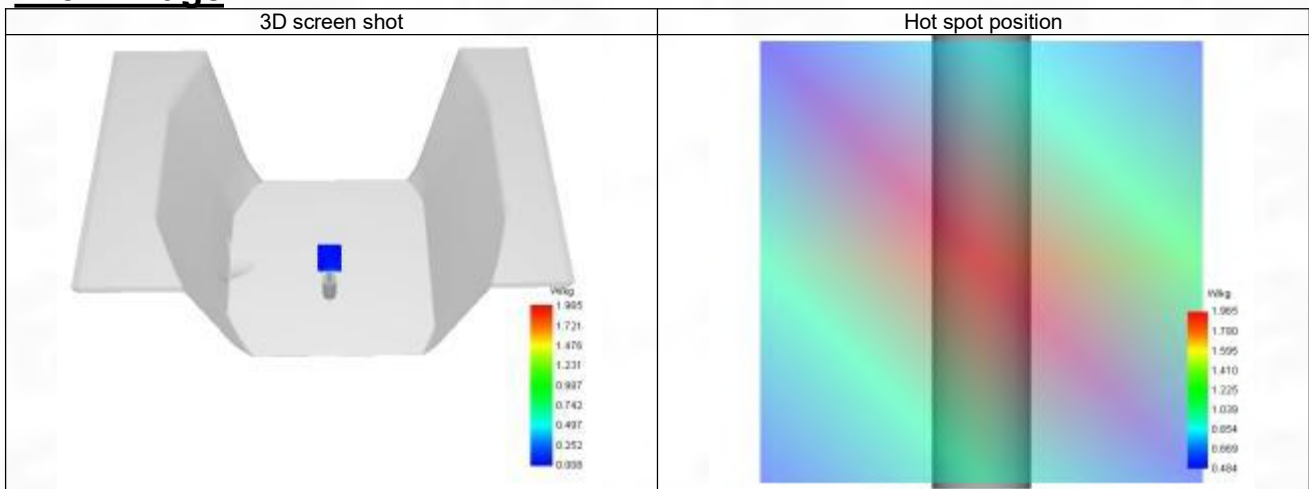

## System Performance Check Data (5800 MHz)

### System check at 5800 MHz

Date of measurement: 18/7/2024


#### A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	2.04
Area Scan	dx=8mm dy=8mm, Adaptive 1 max
Zoom Scan	7x7x12, dx=4mm dy=4mm dz=2mm, Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW5800
Channels	Middle
Signal	CW

#### B. Permittivity

Frequency (MHz)	5800.000
Relative permittivity (real part)	35.180
Relative permittivity (imaginary part)	16.480
Conductivity (S/m)	5.310

#### C. SAR Surface and Volume

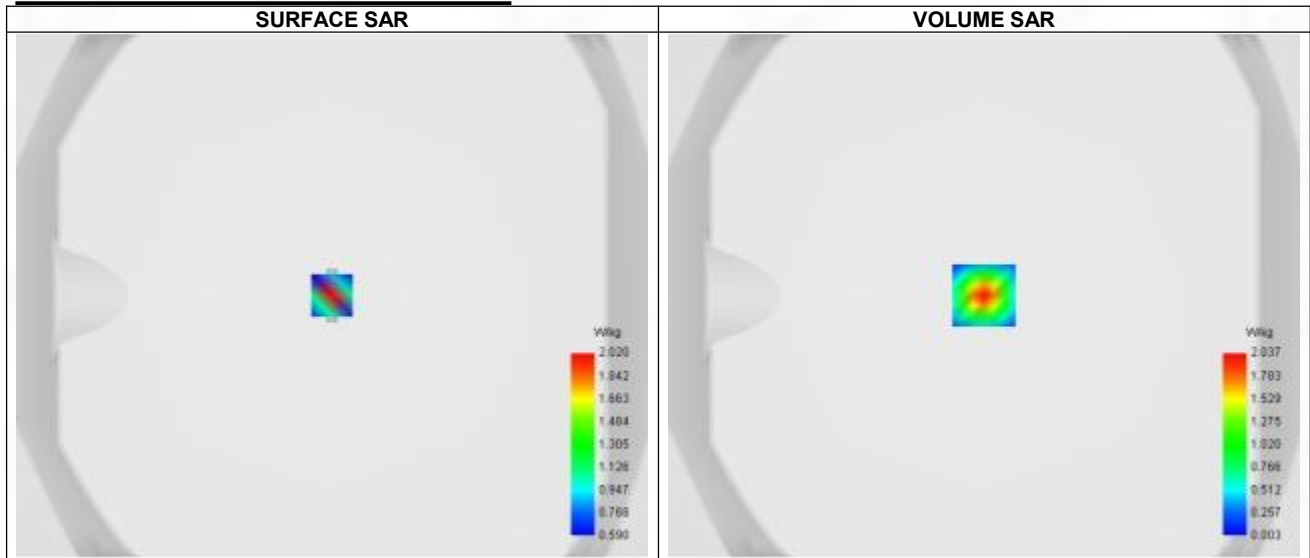


#### D. SAR 1g & 10g


SAR 10g (W/Kg)	0.277
SAR 1g (W/Kg)	0.981
Variation (%)	0.490
Horizontal validation criteria: minimum distance (mm)	7.145
Vertical validation criteria: SAR ratio M2/M1 (%)	44.92%

#### E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00
SAR (W/Kg)	3.948	2.037	0.915	0.361	0.135	0.055	0.033	0.037	0.059

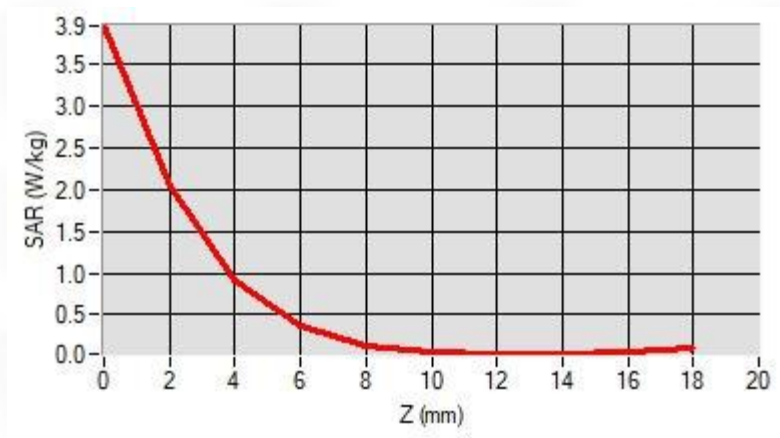

### F. 3D Image

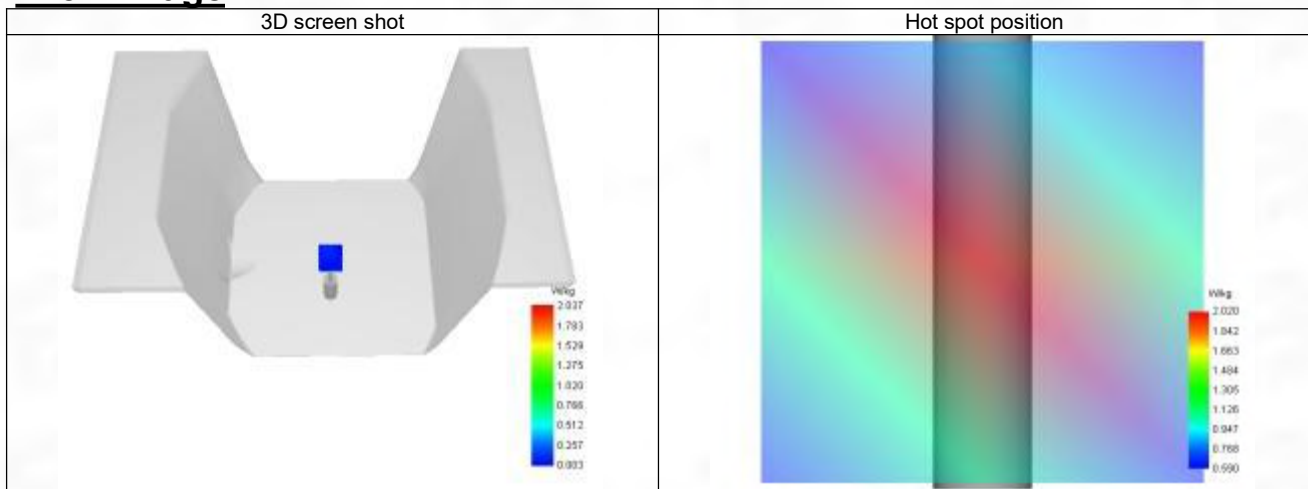

## ANNEX D Test Data

1-Head with front position in dist. 0mm on Channel 190 in GSM850 voice

### SAR Measurement at GSM850 (Cheek, Right)

Date of measurement: 4/7/2024


#### A. Experimental conditions.

Probe	SN 04/22 EPG0365
ConvF	1.68
Area Scan	dx=8mm dy=8mm, Adaptive 1 max
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm, Complete
Phantom	Right head
Device Position	Cheek
Band	GSM850
Channels	Middle (190)
Signal	TDMA (GSM)
Modulation	GMSK

#### B. Permittivity

Frequency (MHz)	836.600
Relative permittivity (real part)	41.408
Relative permittivity (imaginary part)	19.481
Conductivity (S/m)	0.871

#### C. SAR Surface and Volume

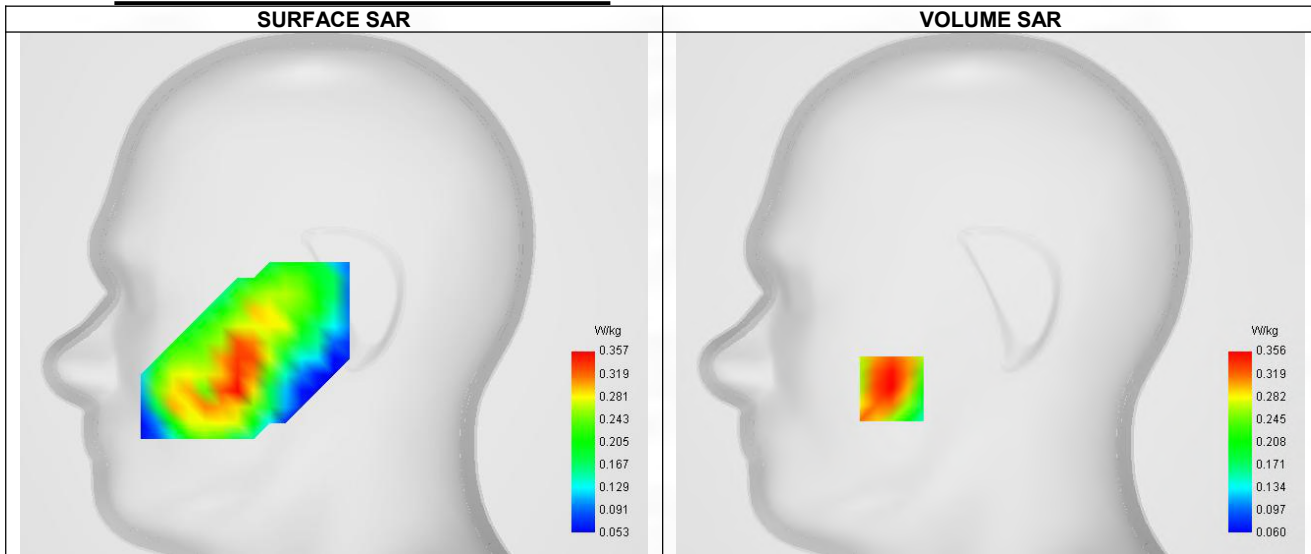


Maximum location: X=-49.00, Y=-47.00 ; SAR Peak: 0.50 W/kg

#### D. SAR 1g & 10g


SAR 10g (W/Kg)	0.243
SAR 1g (W/Kg)	0.347
Variation (%)	-3.850
Horizontal validation criteria: minimum distance (mm)	8.415
Vertical validation criteria: SAR ratio M2/M1 (%)	68.82%

#### E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.492	0.356	0.245	0.183	0.151

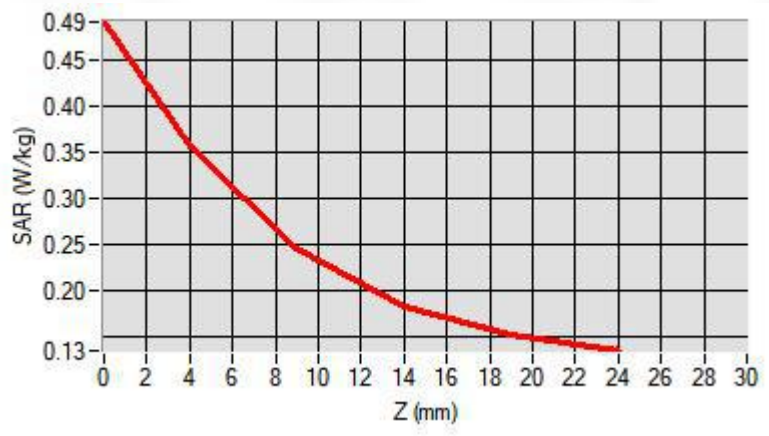

### F. 3D Image

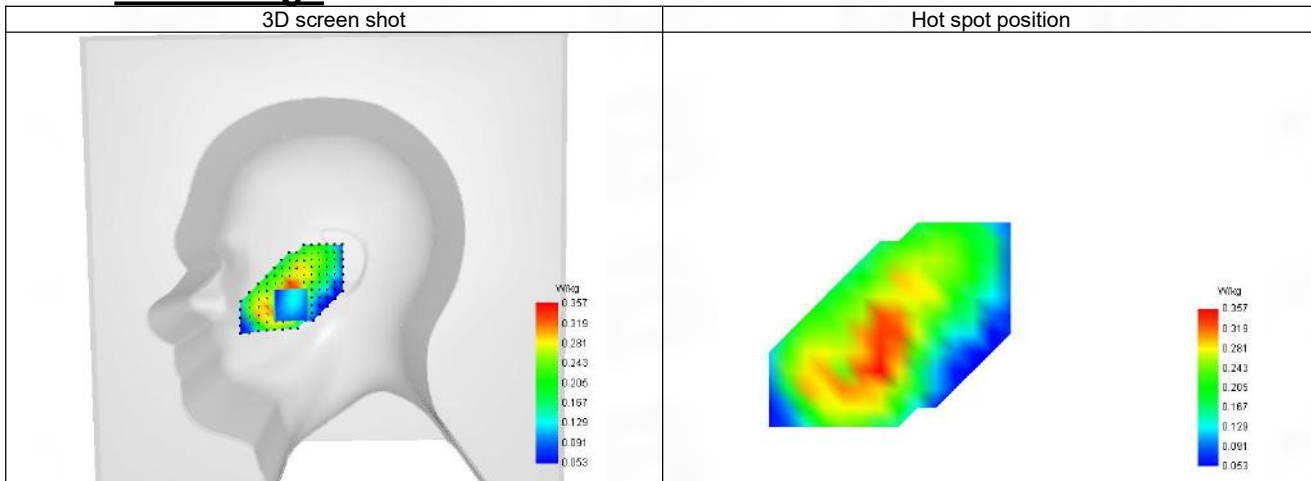



**2-Body with front position in dist. 10mm on Channel 251 in GPRS850+4slots**

**SAR Measurement at GPRS850 (Body, Validation Plane)**

Date of measurement: 4/7/2024


**A. Experimental conditions.**

Probe	SN 04/22 EPG0365
ConvF	1.68
Area Scan	dx=8mm dy=8mm, Adaptive 1 max
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm, Complete
Phantom	Validation plane
Device Position	Body
Band	GPRS850
Channels	Higher (251)
Signal	TDMA (GPRS)
Modulation	GMSK (CS-1)
TX-slots	4

**B. Permittivity**

Frequency (MHz)	848.800
Relative permittivity (real part)	41.389
Relative permittivity (imaginary part)	19.413
Conductivity (S/m)	0.877

**C. SAR Surface and Volume**

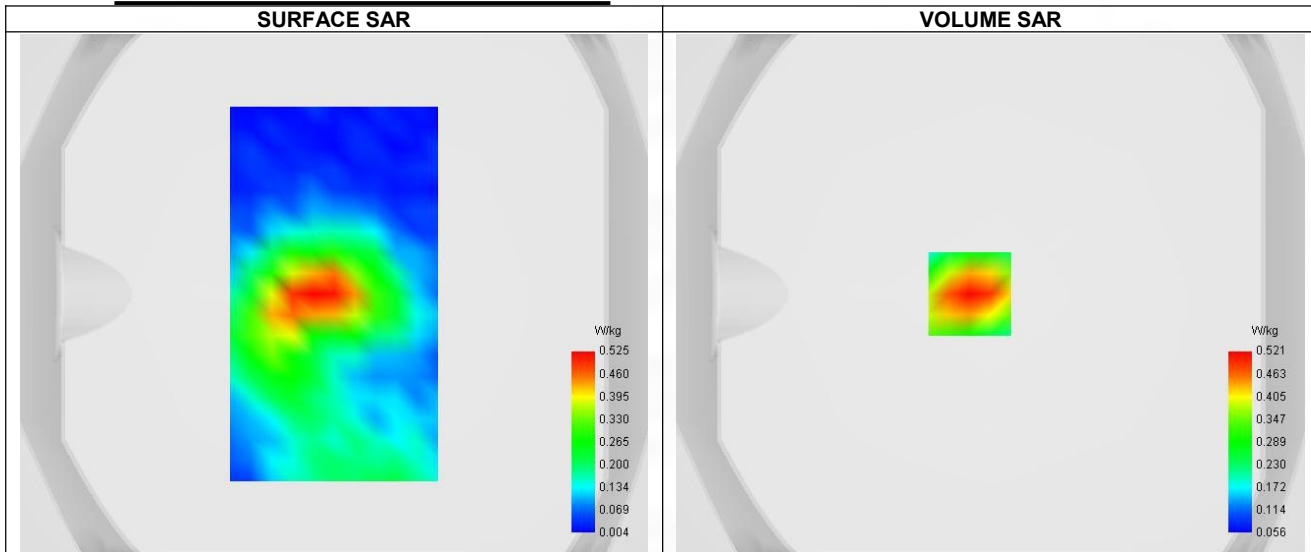


Maximum location: X=-8.00, Y=0.00 ; SAR Peak: 0.77 W/kg

**D. SAR 1g & 10g**


SAR 10g (W/Kg)	0.295
SAR 1g (W/Kg)	0.490
Variation (%)	-3.510
Horizontal validation criteria: minimum distance (mm)	8.472
Vertical validation criteria: SAR ratio M2/M1 (%)	61.42%

**E. Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.767	0.521	0.320	0.202	0.135

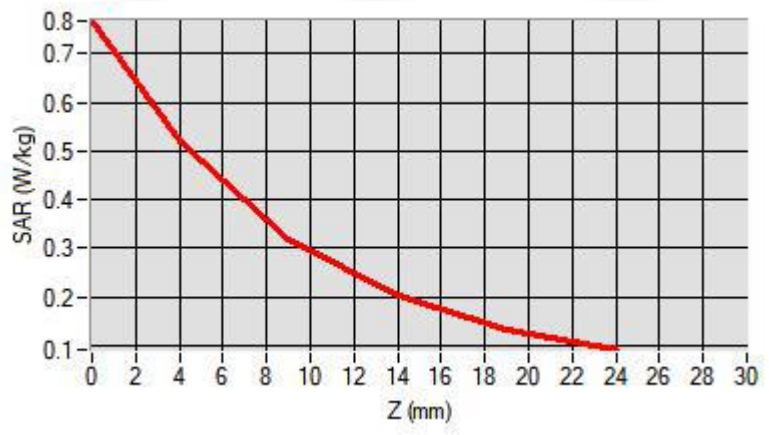

### F. 3D Image

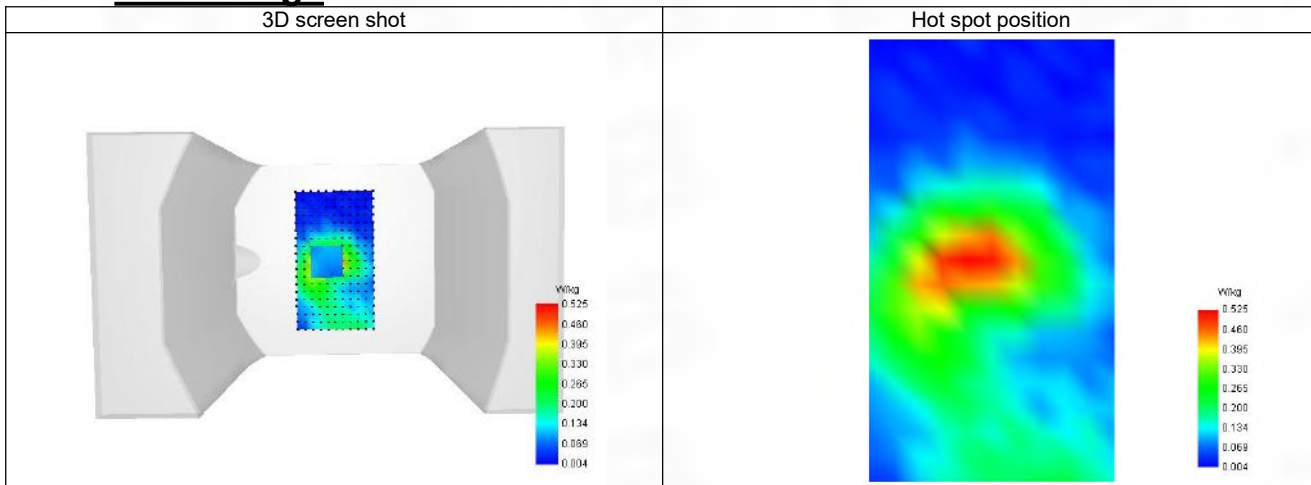

3-Head with front position in dist. 0mm on Channel 512 in GSM1900 voice

**SAR Measurement at GSM1900 (Cheek, Right)**

Date of measurement: 8/7/2024


**A. Experimental conditions.**

Probe	SN 04/22 EPGO365
ConvF	1.96
Area Scan	dx=8mm dy=8mm, Adaptative 1 max
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm, Complete
Phantom	Right head
Device Position	Cheek
Band	GSM1900
Channels	Lower (512)
Signal	TDMA (GSM)
Modulation	GMSK

**B. Permittivity**

Frequency (MHz)	1850.200
Relative permittivity (real part)	39.895
Relative permittivity (imaginary part)	13.734
Conductivity (S/m)	1.390

**C. SAR Surface and Volume**

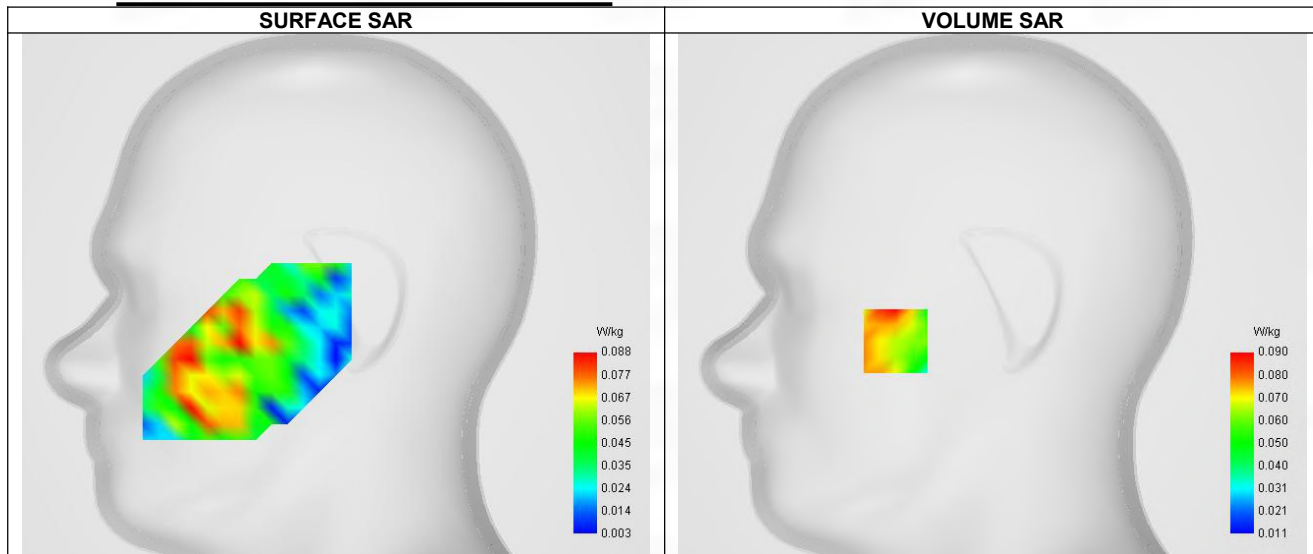


Maximum location: X=-48.00, Y=-23.00 ; SAR Peak: 0.17 W/kg

**D. SAR 1g & 10g**


SAR 10g (W/Kg)	0.051
SAR 1g (W/Kg)	0.086
Variation (%)	-0.720
Horizontal validation criteria: minimum distance (mm)	8.730
Vertical validation criteria: SAR ratio M2/M1 (%)	70.00%

**E. Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	-0.070	0.090	0.063	0.024	0.048

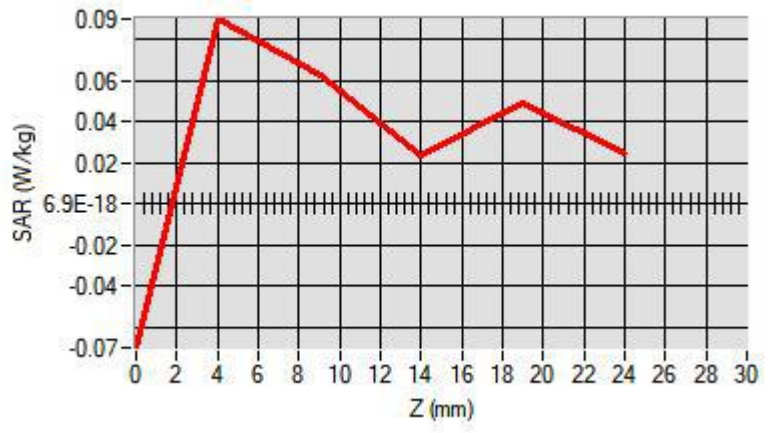

### F. 3D Image

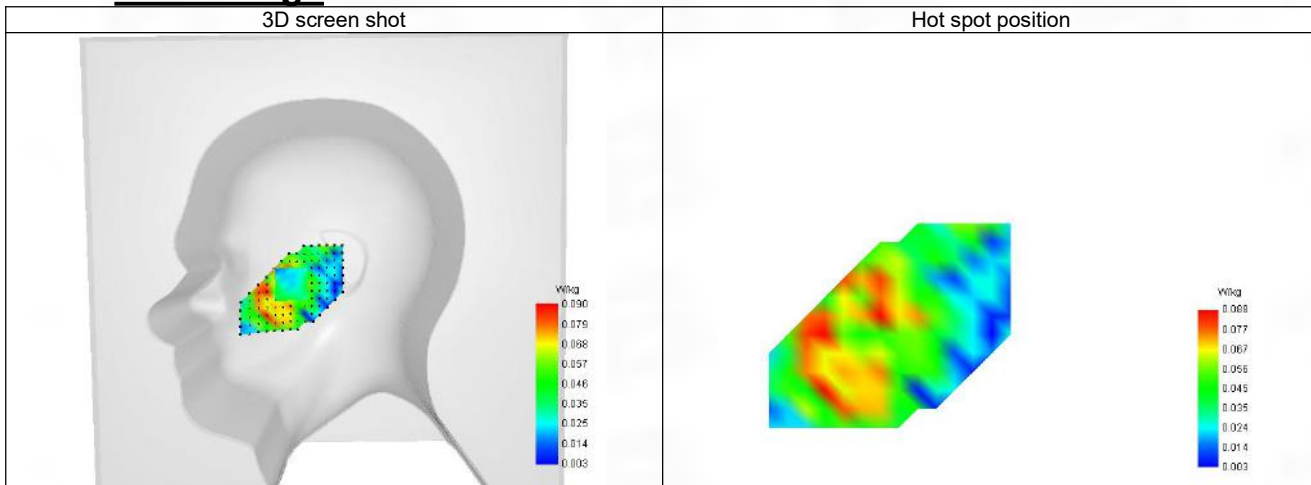

**4-Body with front position in dist. 10mm on Channel 810 in GPRS1900+4slots**

**SAR Measurement at GPRS1900 (Body, Validation Plane)**

Date of measurement: 8/7/2024


**A. Experimental conditions.**

Probe	SN 04/22 EPGO365
ConvF	1.96
Area Scan	dx=8mm dy=8mm, Adaptive 1 max
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm, Complete
Phantom	Validation plane
Device Position	Body
Band	GPRS1900
Channels	Higher (810)
Signal	TDMA (GPRS)
Modulation	GMSK (CS-1)
TX-slots	4

**B. Permittivity**

Frequency (MHz)	1909.800
Relative permittivity (real part)	39.866
Relative permittivity (Imaginary part)	13.379
Conductivity (S/m)	1.417

**C. SAR Surface and Volume**

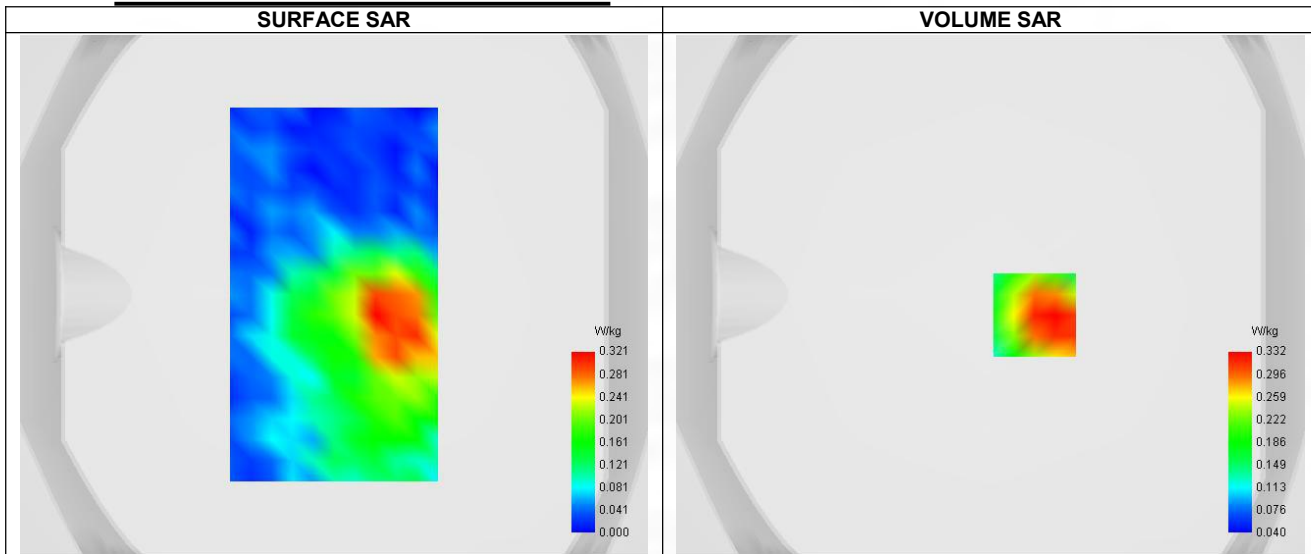


Maximum location: X=17.00, Y=-8.00 ; SAR Peak: 0.55 W/kg

**D. SAR 1g & 10g**


SAR 10g (W/Kg)	0.203
SAR 1g (W/Kg)	0.328
Variation (%)	-1.190
Horizontal validation criteria: minimum distance (mm)	8.327
Vertical validation criteria: SAR ratio M2/M1 (%)	54.22%

**E. Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.612	0.332	0.180	0.126	0.101

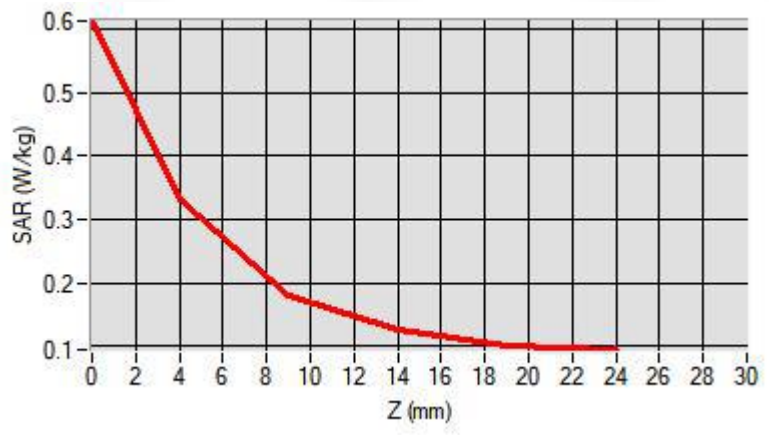

### F. 3D Image

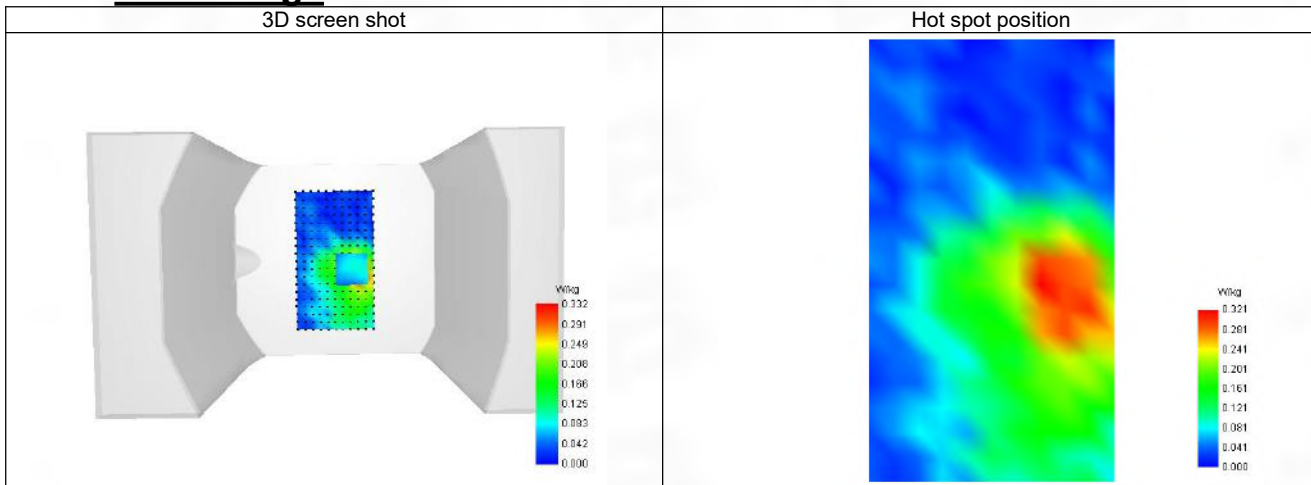

**5-Head with front position in dist. 0mm on Channel 9262 in WCDMA Band 2**

**SAR Measurement at Band 2 (1900) (Cheek, Right)**

Date of measurement: 8/7/2024


**A. Experimental conditions.**

Probe	SN 04/22 EPG0365
ConvF	1.96
Area Scan	dx=8mm dy=8mm, Adaptative 1 max
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm, Complete
Phantom	Right head
Device Position	Cheek
Band	Band 2 (1900)
Channels	Lower (9262)
Signal	WCDMA
Mode	Release 99
Connection Type	RMC, 12.2 kbps

**B. Permittivity**

Frequency (MHz)	1852.400
Relative permittivity (real part)	39.894
Relative permittivity (imaginary part)	13.718
Conductivity (S/m)	1.391

**C. SAR Surface and Volume**

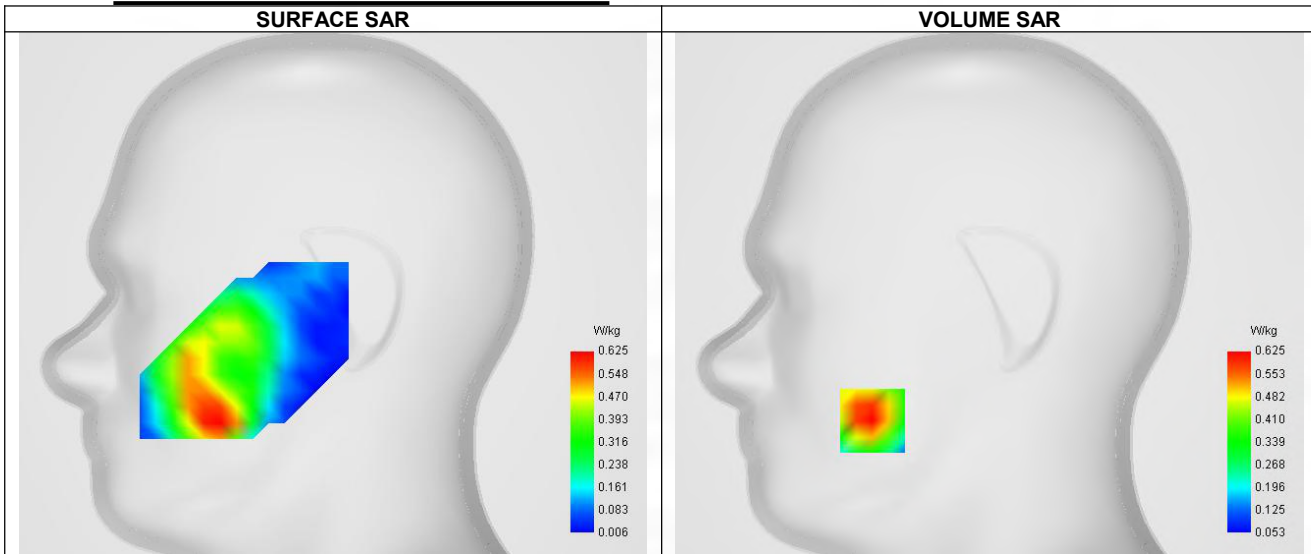


Maximum location: X=-58.00, Y=-63.00 ; SAR Peak: 0.89 W/kg

**D. SAR 1g & 10g**


SAR 10g (W/Kg)	0.369
SAR 1g (W/Kg)	0.600
Variation (%)	-0.410
Horizontal validation criteria: minimum distance (mm)	8.613
Vertical validation criteria: SAR ratio M2/M1 (%)	65.12%

**E. Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.879	0.625	0.407	0.271	0.189

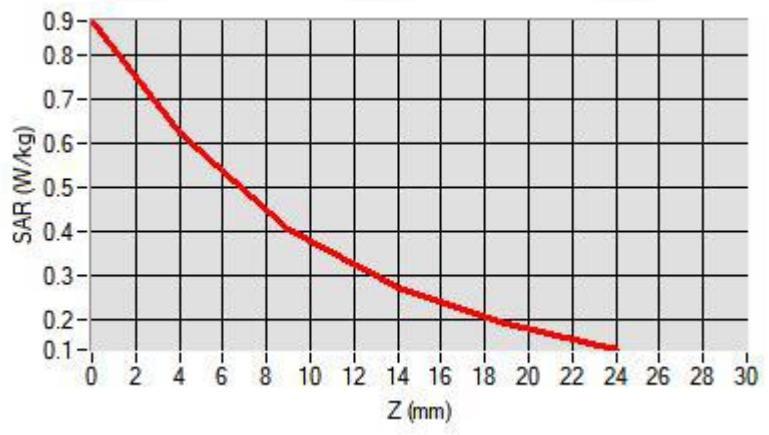

### F. 3D Image

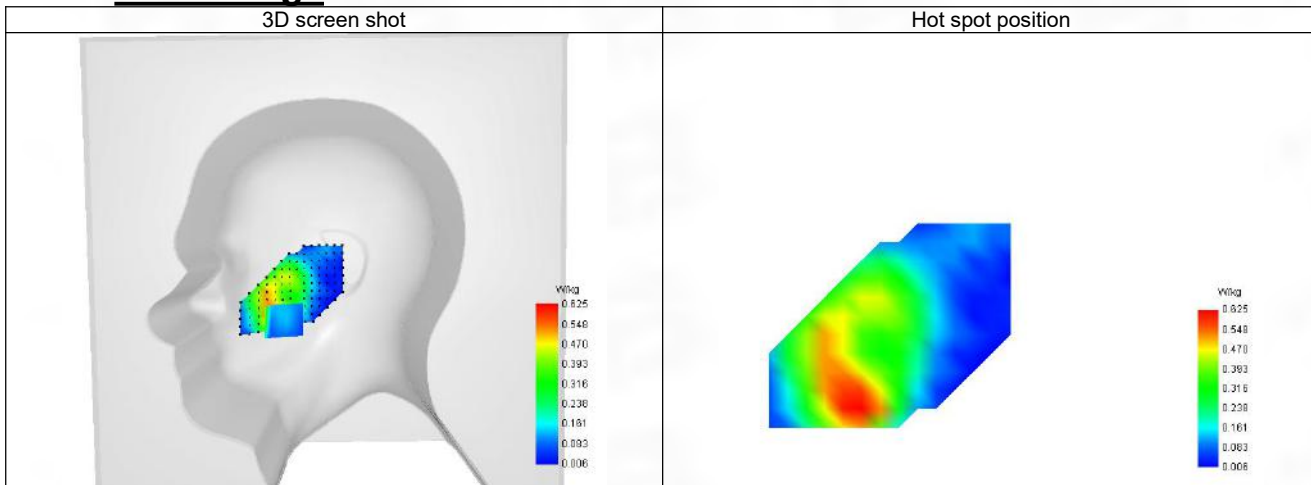



**6-Body with front position in dist. 10mm on Channel 9262 in WCDMA Band 2**

**SAR Measurement at Band 2 (1900) (Body, Validation Plane)**

Date of measurement: 8/7/2024


**A. Experimental conditions.**

Probe	SN 04/22 EPGO365
ConvF	1.96
Area Scan	dx=8mm dy=8mm, Adaptive 1 max
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm, Complete
Phantom	Validation plane
Device Position	Body
Band	Band 2 (1900)
Channels	Lower (9262)
Signal	WCDMA
Mode	Release 99
Connection Type	RMC, 12.2 kbps

**B. Permittivity**

Frequency (MHz)	1852.400
Relative permittivity (real part)	39.894
Relative permittivity (imaginary part)	13.718
Conductivity (S/m)	1.391

**C. SAR Surface and Volume**

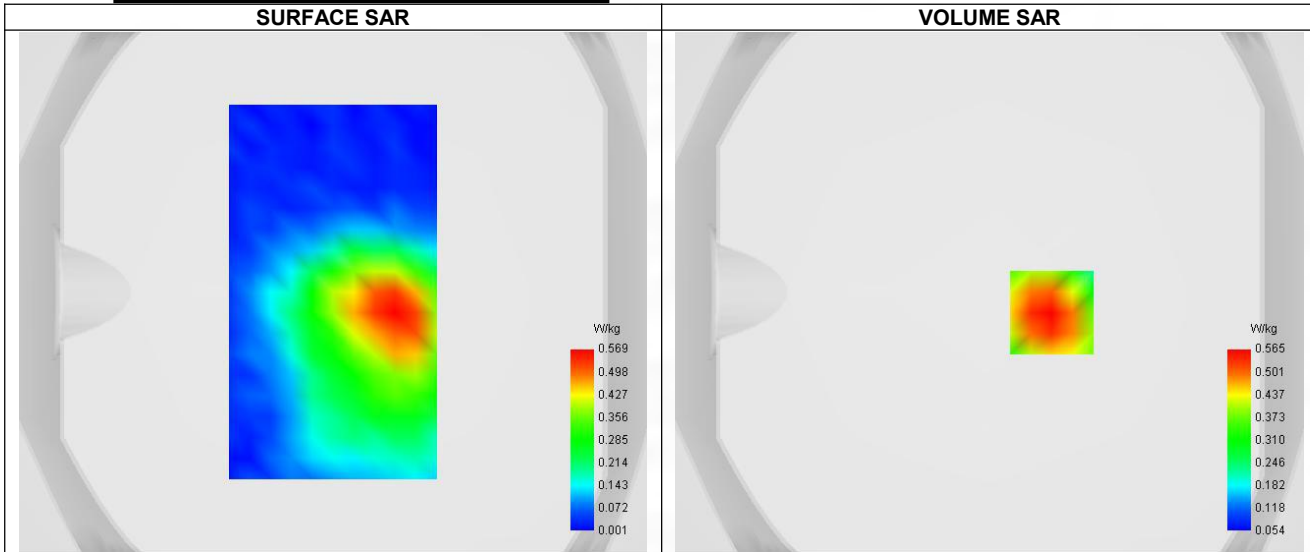


Maximum location: X=24.00, Y=-8.00 ; SAR Peak: 0.85 W/kg

**D. SAR 1g & 10g**


SAR 10g (W/Kg)	0.332
SAR 1g (W/Kg)	0.542
Variation (%)	-4.320
Horizontal validation criteria: minimum distance (mm)	8.263
Vertical validation criteria: SAR ratio M2/M1 (%)	60.71%

**E. Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.842	0.565	0.343	0.218	0.151

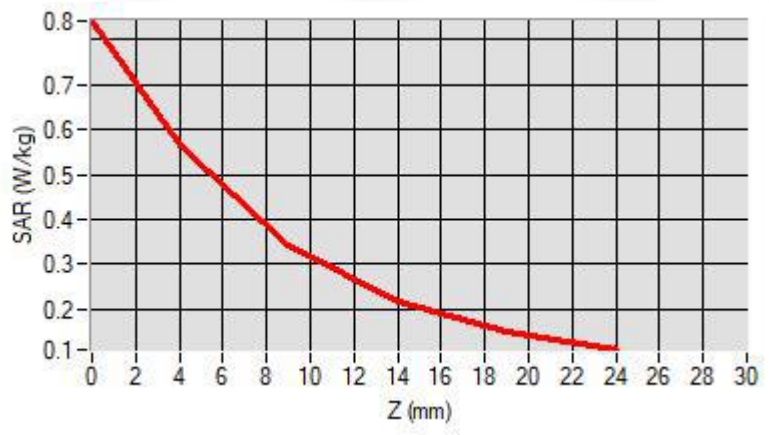

### F. 3D Image

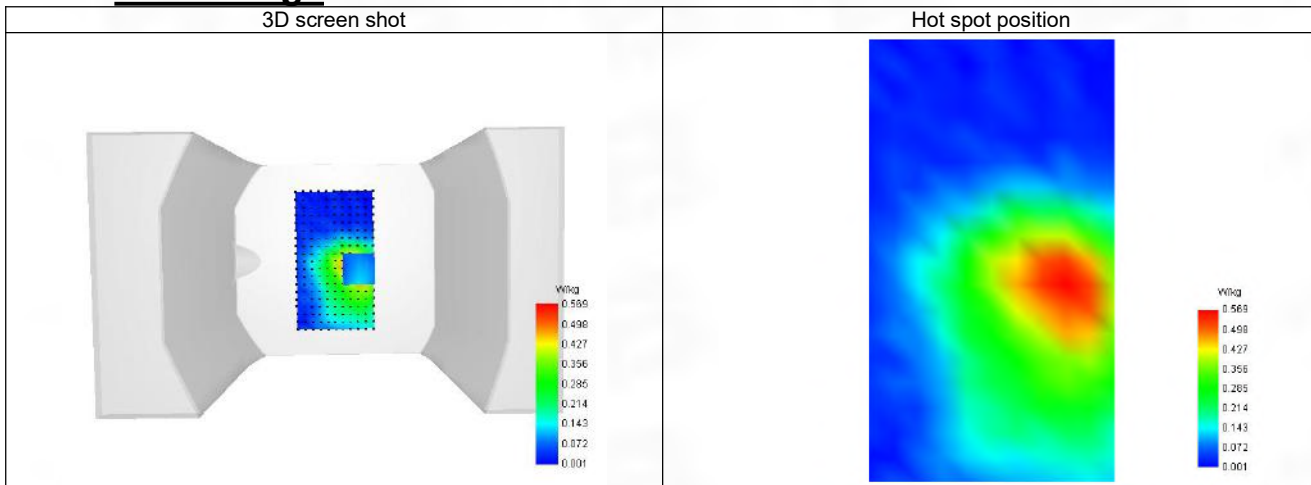

**7-Head with front position in dist. 0mm on Channel 4183 in WCDMA Band 5**

**SAR Measurement at Band 5 (850) (Cheek, Right)**

Date of measurement: 4/7/2024


**A. Experimental conditions.**

Probe	SN 04/22 EPG0365
ConvF	1.68
Area Scan	dx=8mm dy=8mm, Adaptative 1 max
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm, Complete
Phantom	Right head
Device Position	Cheek
Band	Band 5 (850)
Channels	Middle (4183)
Signal	WCDMA
Mode	Release 99
Connection Type	RMC, 12.2 kbps

**B. Permittivity**

Frequency (MHz)	836.600
Relative permittivity (real part)	41.408
Relative permittivity (imaginary part)	19.481
Conductivity (S/m)	0.871

**C. SAR Surface and Volume**

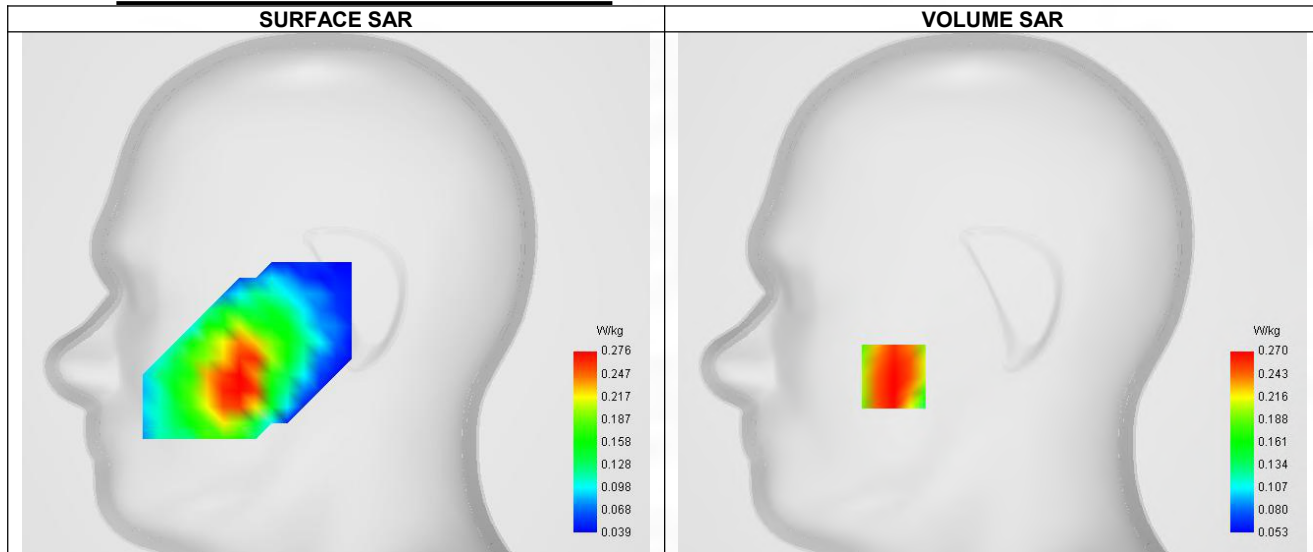


Maximum location: X=-49.00, Y=-41.00 ; SAR Peak: 0.35 W/kg

**D. SAR 1g & 10g**


SAR 10g (W/Kg)	0.199
SAR 1g (W/Kg)	0.265
Variation (%)	-3.620
Horizontal validation criteria: minimum distance (mm)	8.775
Vertical validation criteria: SAR ratio M2/M1 (%)	80.74%

**E. Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.222	0.270	0.218	0.165	0.147

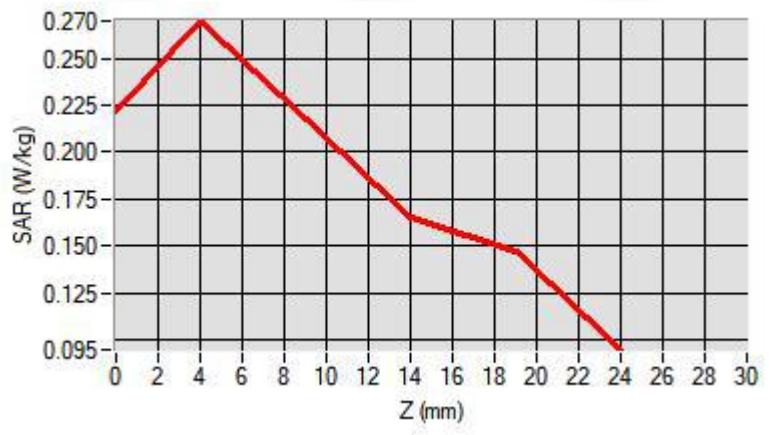

### F. 3D Image

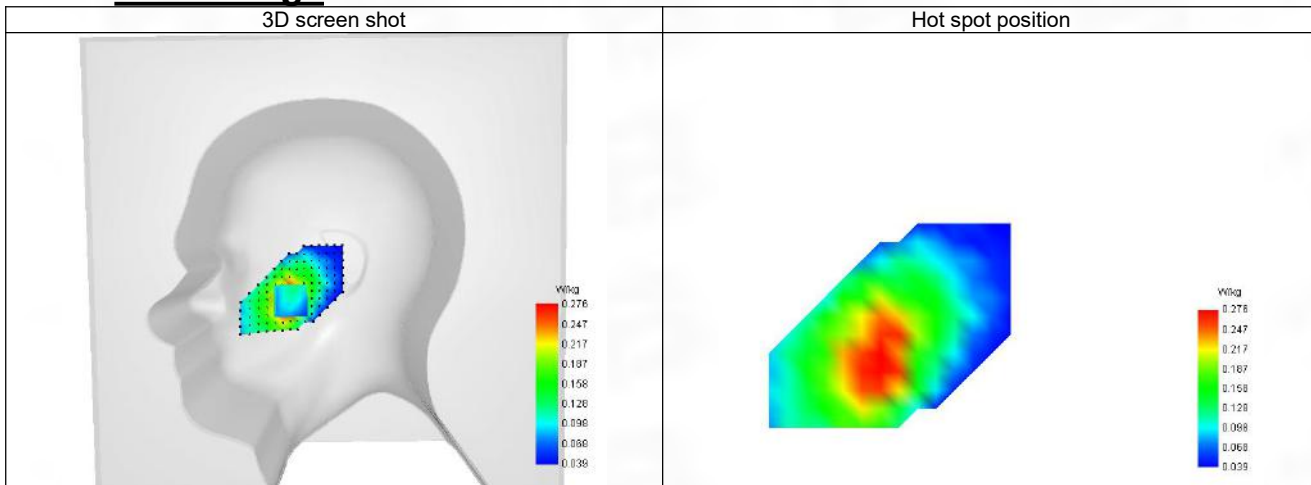

**8-Body with front position in dist. 10mm on Channel 4183 in WCDMA Band 5**

**SAR Measurement at Band 5 (850) (Body, Validation Plane)**

Date of measurement: 4/7/2024


**A. Experimental conditions.**

Probe	SN 04/22 EPG0365
ConvF	1.68
Area Scan	dx=8mm dy=8mm, Adaptative 1 max
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm, Complete
Phantom	Validation plane
Device Position	Body
Band	Band 5 (850)
Channels	Middle (4183)
Signal	WCDMA
Mode	Release 99
Connection Type	RMC, 12.2 kbps

**B. Permittivity**

Frequency (MHz)	836.600
Relative permittivity (real part)	41.408
Relative permittivity (imaginary part)	19.481
Conductivity (S/m)	0.871

**C. SAR Surface and Volume**

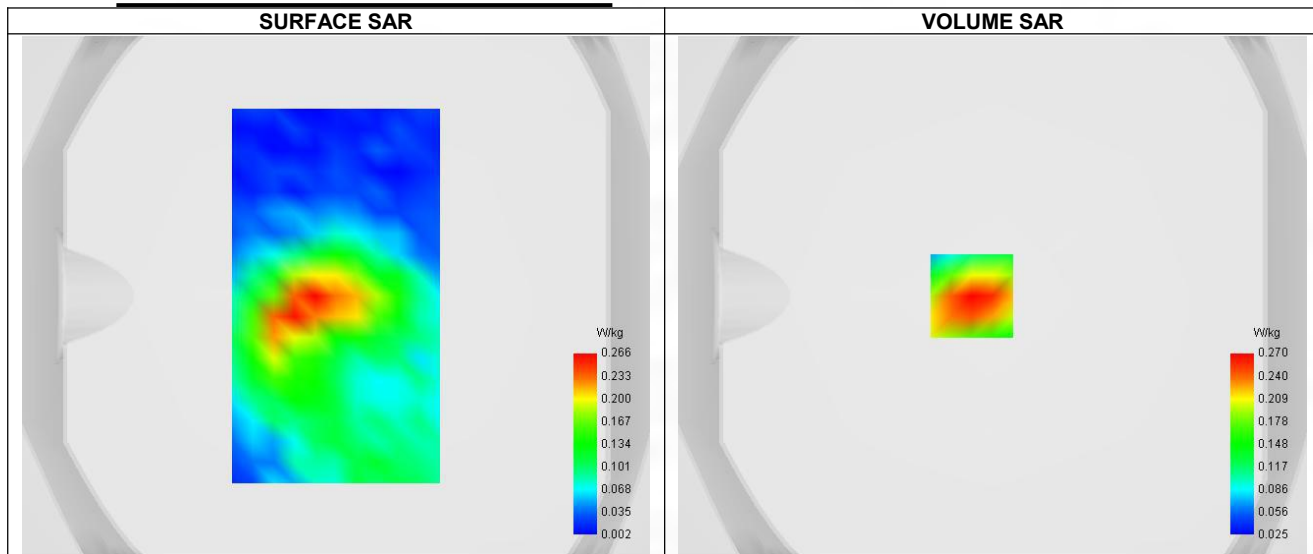


Maximum location: X=-8.00, Y=0.00 ; SAR Peak: 0.40 W/kg

**D. SAR 1g & 10g**


SAR 10g (W/Kg)	0.157
SAR 1g (W/Kg)	0.257
Variation (%)	-4.390
Horizontal validation criteria: minimum distance (mm)	8.469
Vertical validation criteria: SAR ratio M2/M1 (%)	62.96%

**E. Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.396	0.270	0.170	0.114	0.085

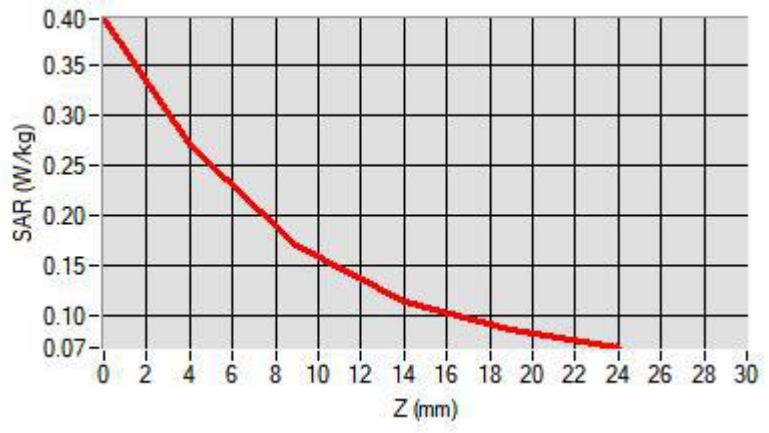

### F. 3D Image

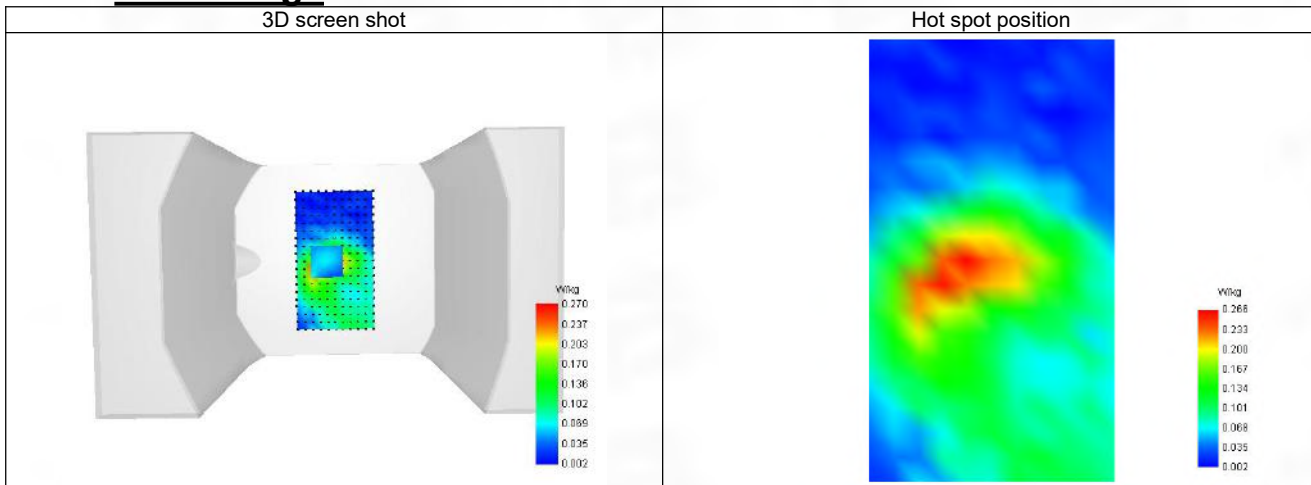

**9-Head with front position in dist. 0mm on Channel 19100 in LTE band 2**

**SAR Measurement at LTE band 2 (Cheek, Right)**

Date of measurement: 10/7/2024


**A. Experimental conditions.**

Probe	SN 04/22 EPGO365
ConvF	2.24
Area Scan	dx=8mm dy=8mm, Adaptive 1 max
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm, Complete
Phantom	Right head
Device Position	Cheek
Band	LTE band 2
Channels	Higher (19100)
Signal	LTE FDD
Cell Bandwidth	20 Mhz
Modulation	SC-OFDM - QPSK
RB offset	0
RB size	1

**B. Permittivity**

Frequency (MHz)	1891.090
Relative permittivity (real part)	39.883
Relative permittivity (imaginary part)	13.443
Conductivity (S/m)	1.406

**C. SAR Surface and Volume**

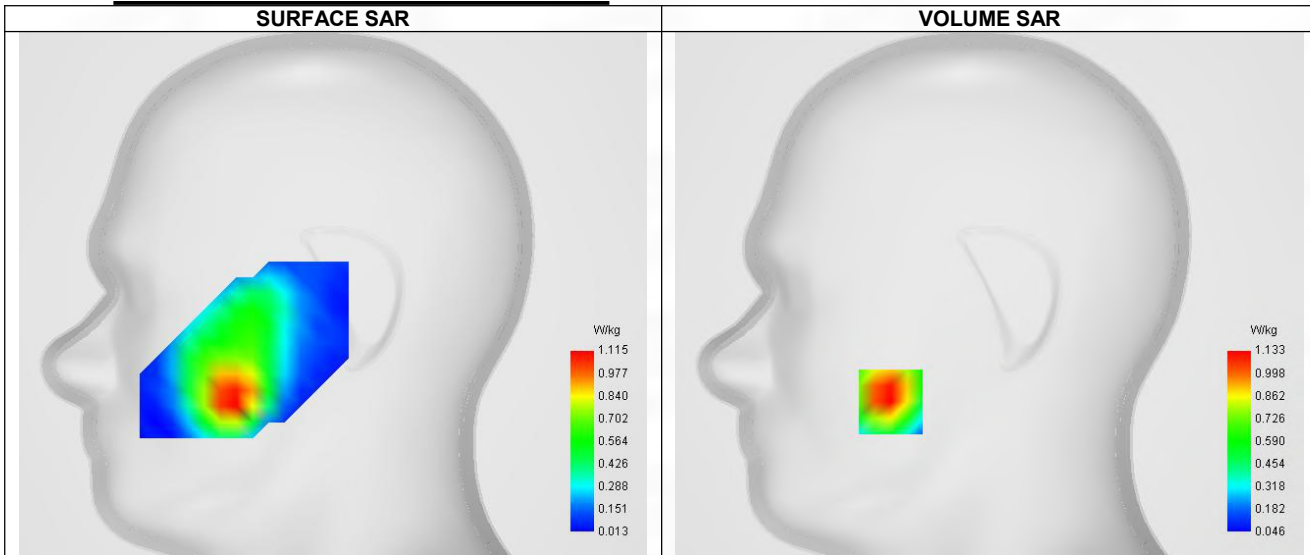

Maximum location: X=-49.00, Y=-54.00 ; SAR Peak: 1.59 W/kg


**D. SAR 1g & 10g**

SAR 10g (W/Kg)	0.657
SAR 1g (W/Kg)	0.998
Variation (%)	-3.120
Horizontal validation criteria: minimum distance (mm)	8.716
Vertical validation criteria: SAR ratio M2/M1 (%)	66.28%


**E. Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00
--------	------	------	------	-------	-------

SAR (W/Kg)	1.551	1.133	0.751	0.489	0.311
------------	-------	-------	-------	-------	-------

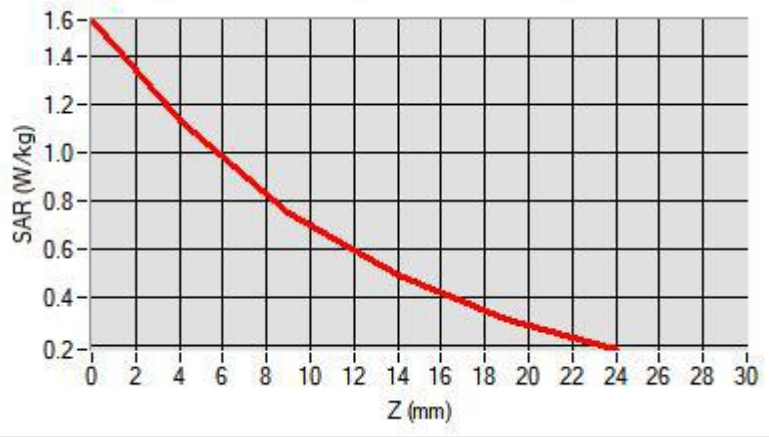

### F. 3D Image

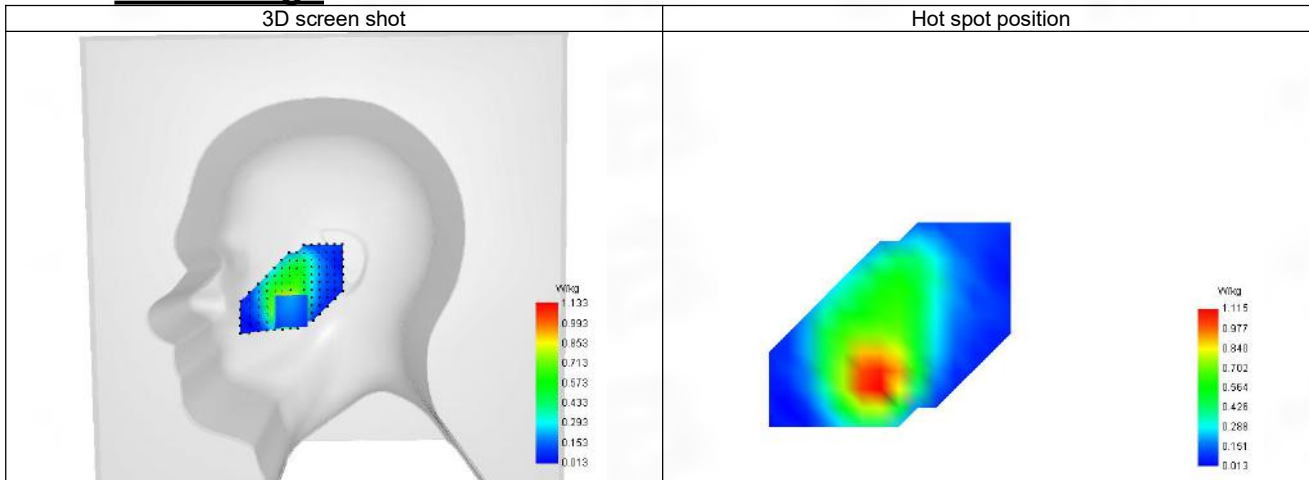



**10-Body with front position in dist. 10mm on Channel 19100 in LTE band 2**

**SAR Measurement at LTE band 2 (Body, Validation Plane)**

Date of measurement: 10/7/2024


**A. Experimental conditions.**

Probe	SN 04/22 EPGO365
ConvF	2.24
Area Scan	dx=8mm dy=8mm, Adaptive 1 max
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm, Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 2
Channels	Higher (19100)
Signal	LTE FDD
Cell Bandwidth	20 Mhz
Modulation	SC-OFDM - QPSK
RB offset	0
RB size	1

**B. Permittivity**

Frequency (MHz)	1891.090
Relative permittivity (real part)	39.883
Relative permittivity (imaginary part)	13.443
Conductivity (S/m)	1.406

**C. SAR Surface and Volume**

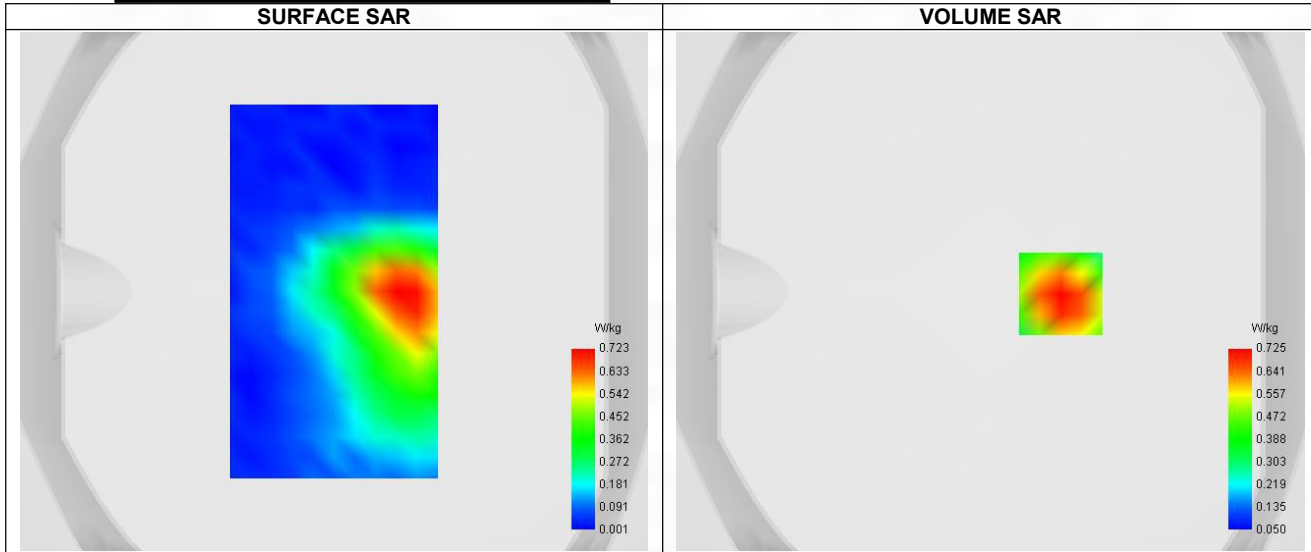


Maximum location: X=27.00, Y=-1.00 ; SAR Peak: 1.04 W/kg

**D. SAR 1g & 10g**


SAR 10g (W/Kg)	0.432
SAR 1g (W/Kg)	0.696
Variation (%)	-1.560
Horizontal validation criteria: minimum distance (mm)	8.423
Vertical validation criteria: SAR ratio M2/M1 (%)	64.14%

**E. Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.037	0.725	0.465	0.310	0.220

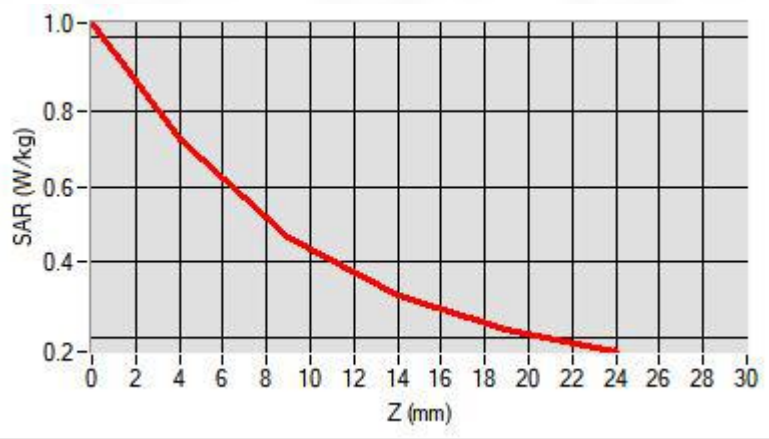

### F. 3D Image

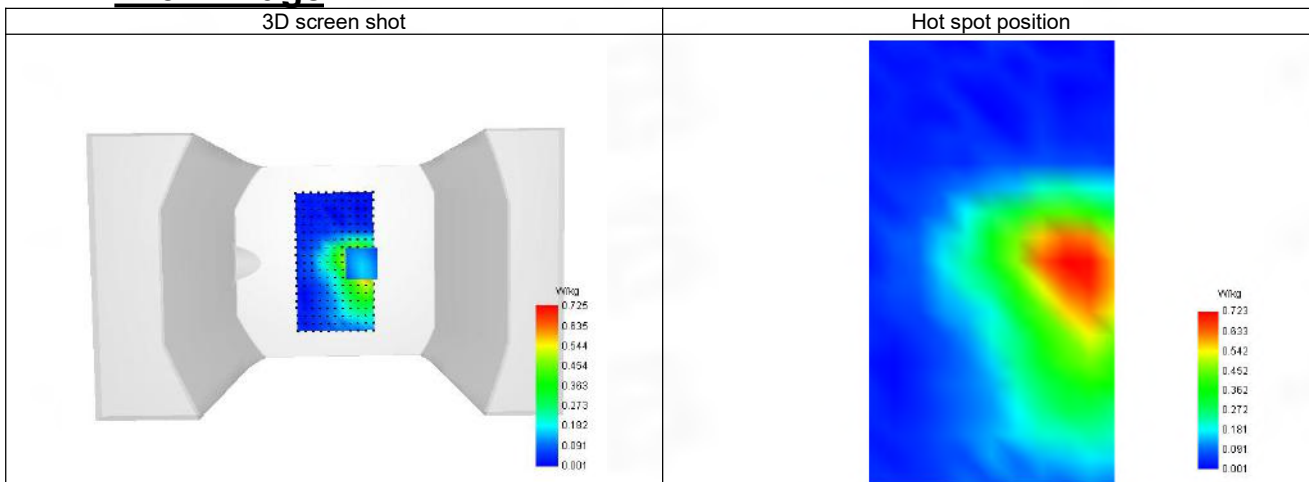

**11-Head with front position in dist. 0mm on Channel 20175 in LTE band 4**

**SAR Measurement at LTE band 4 (Cheek, Right)**

Date of measurement: 8/7/2024


**A. Experimental conditions.**

Probe	SN 04/22 EPG0365
ConvF	1.96
Area Scan	dx=8mm dy=8mm, Adaptive 1 max
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm, Complete
Phantom	Right head
Device Position	Cheek
Band	LTE band 4
Channels	Middle (20175)
Signal	LTE FDD
Cell Bandwidth	20 Mhz
Modulation	SC-OFDM - QPSK
RB offset	0
RB size	1

**B. Permittivity**

Frequency (MHz)	1723.590
Relative permittivity (real part)	40.029
Relative permittivity (imaginary part)	14.518
Conductivity (S/m)	1.330

**C. SAR Surface and Volume**

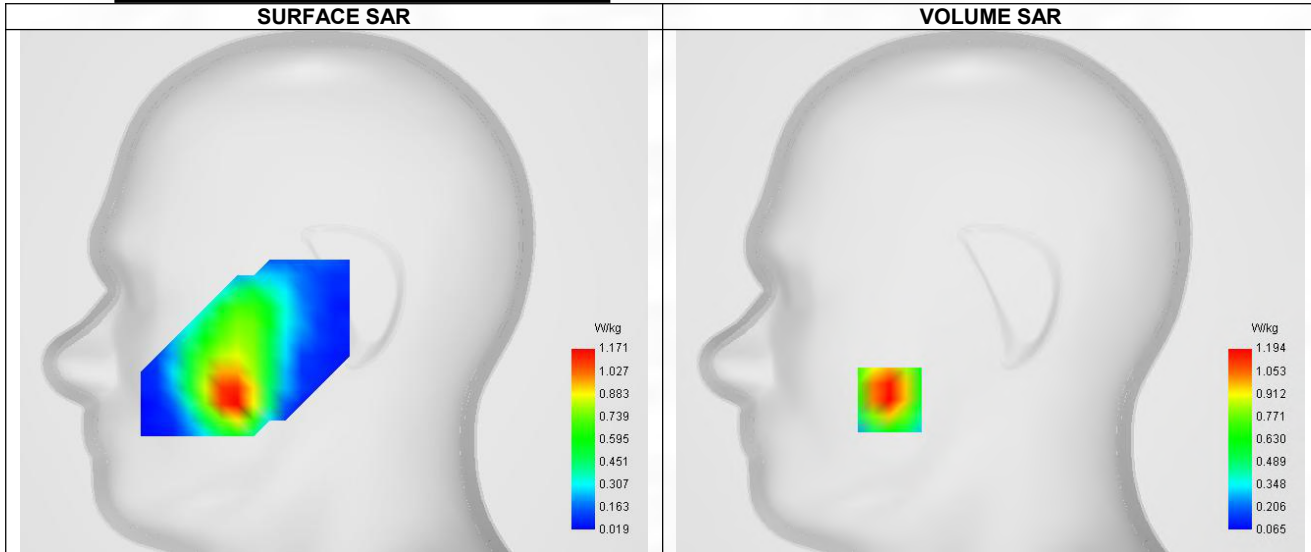


Maximum location: X=-50.00, Y=-54.00 ; SAR Peak: 1.71 W/kg

**D. SAR 1g & 10g**


SAR 10g (W/Kg)	0.689
SAR 1g (W/Kg)	1.012
Variation (%)	1.640
Horizontal validation criteria: minimum distance (mm)	8.551
Vertical validation criteria: SAR ratio M2/M1 (%)	63.90%

**E. Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.691	1.194	0.763	0.488	0.315

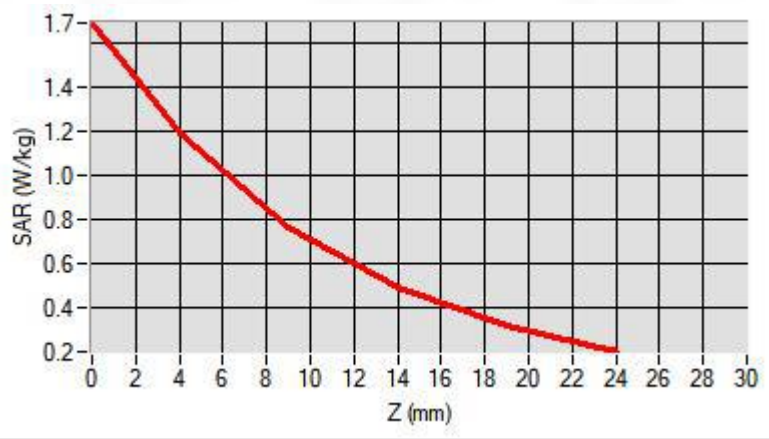

### F. 3D Image

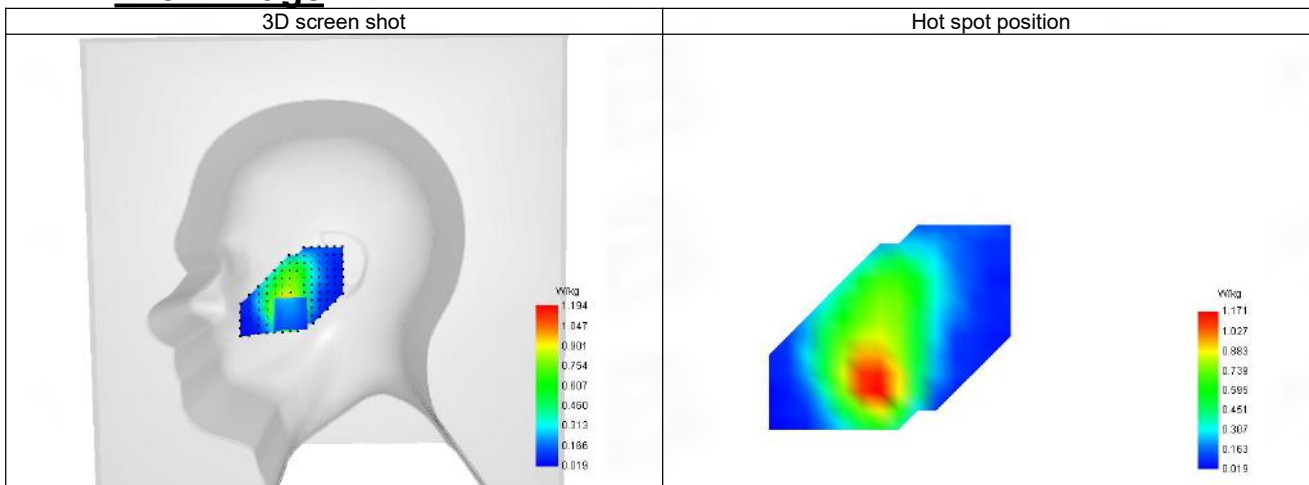

**12-Body with front position in dist. 10mm on Channel 20175 in LTE band 4**

**SAR Measurement at LTE band 4 (Body, Validation Plane)**

Date of measurement: 8/7/2024


**A. Experimental conditions.**

Probe	SN 04/22 EPG0365
ConvF	1.96
Area Scan	dx=8mm dy=8mm, Adaptive 1 max
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm, Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 4
Channels	Middle (20175)
Signal	LTE FDD
Cell Bandwidth	20 Mhz
Modulation	SC-OFDM - QPSK
RB offset	0
RB size	1

**B. Permittivity**

Frequency (MHz)	1723.590
Relative permittivity (real part)	40.029
Relative permittivity (imaginary part)	14.518
Conductivity (S/m)	1.330

**C. SAR Surface and Volume**

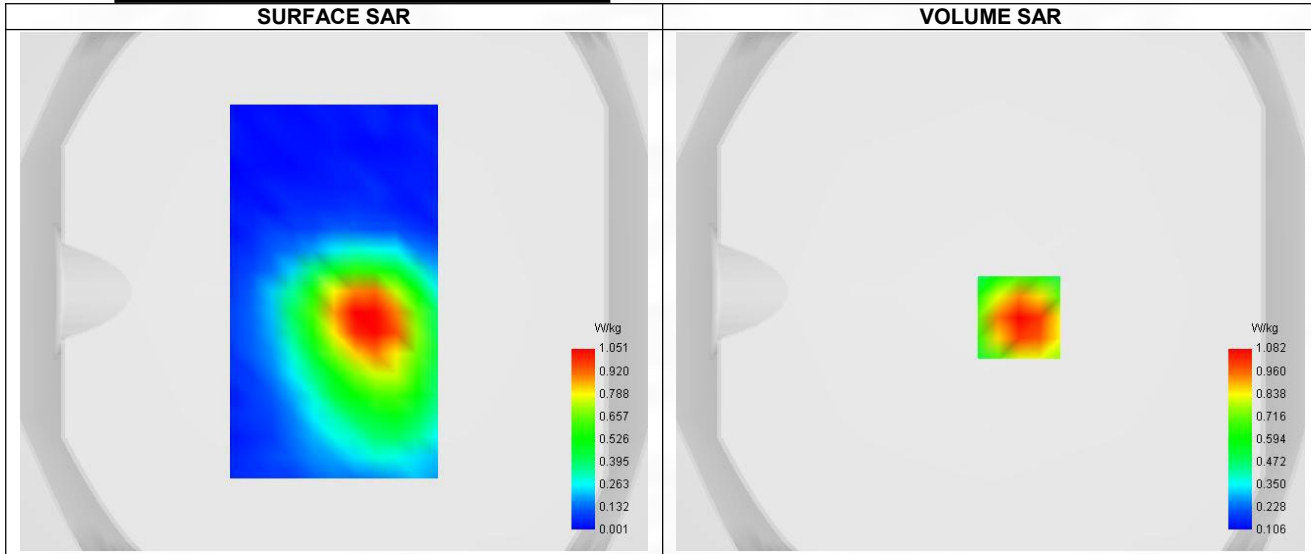


Maximum location: X=11.00, Y=-10.00 ; SAR Peak: 1.51 W/kg

**D. SAR 1g & 10g**


SAR 10g (W/Kg)	0.650
SAR 1g (W/Kg)	1.029
Variation (%)	3.290
Horizontal validation criteria: minimum distance (mm)	8.356
Vertical validation criteria: SAR ratio M2/M1 (%)	66.36%

**E. Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.498	1.082	0.718	0.483	0.335

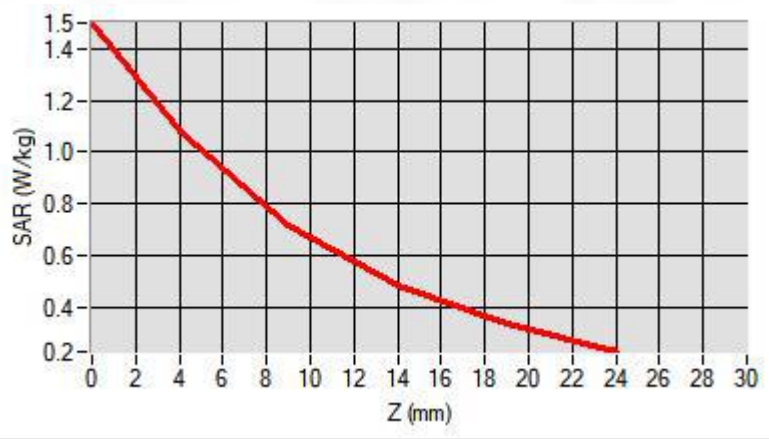

### F. 3D Image

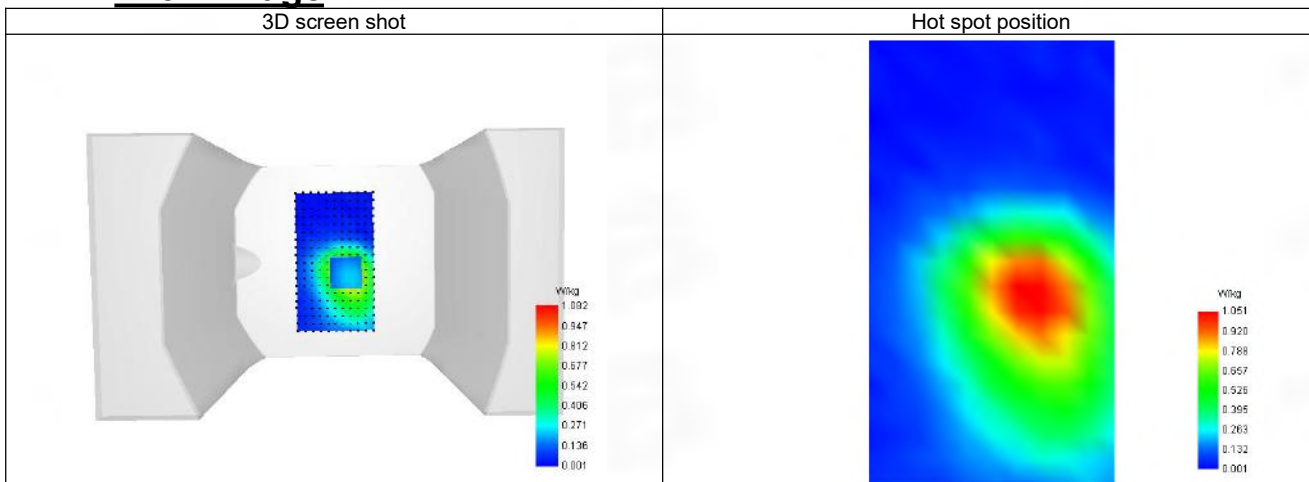

**13-Head with front position in dist. 0mm on Channel 20525 in LTE band 5**

**SAR Measurement at LTE band 5 (Cheek, Right)**

Date of measurement: 4/7/2024


**A. Experimental conditions.**

Probe	SN 04/22 EPG0365
ConvF	1.68
Area Scan	dx=8mm dy=8mm, Adaptive 1 max
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm, Complete
Phantom	Right head
Device Position	Cheek
Band	LTE band 5
Channels	Middle (20525)
Signal	LTE FDD
Cell Bandwidth	10 Mhz
Modulation	SC-OFDM - QPSK
RB offset	0
RB size	1

**B. Permittivity**

Frequency (MHz)	832.090
Relative permittivity (real part)	41.423
Relative permittivity (imaginary part)	19.557
Conductivity (S/m)	0.870

**C. SAR Surface and Volume**

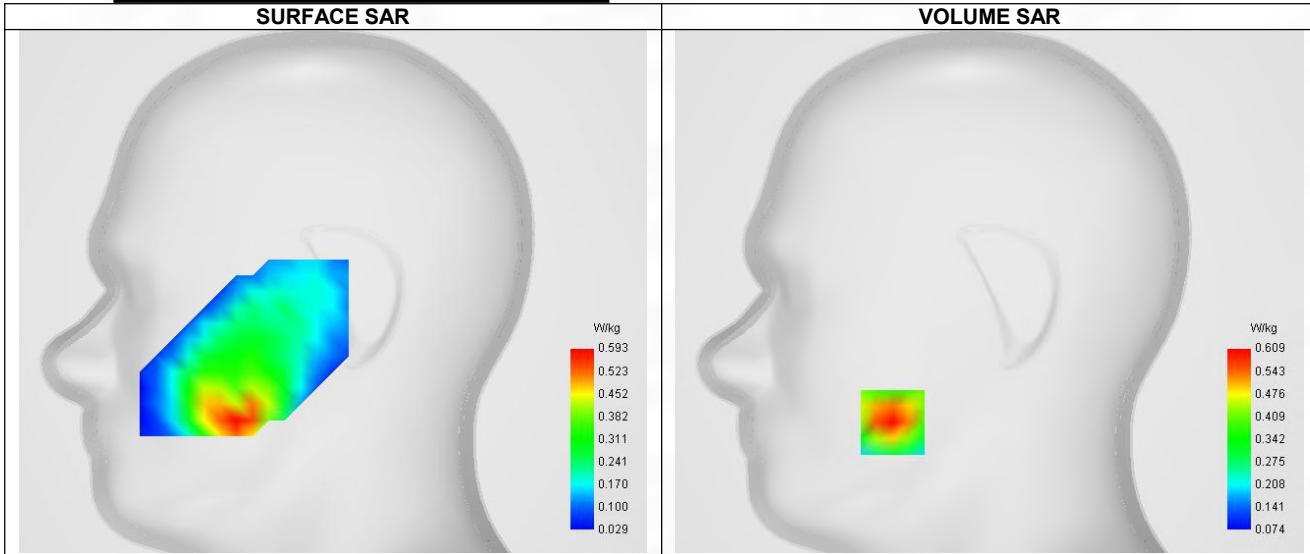


Maximum location: X=-48.00, Y=-65.00 ; SAR Peak: 0.92 W/kg

**D. SAR 1g & 10g**


SAR 10g (W/Kg)	0.345
SAR 1g (W/Kg)	0.574
Variation (%)	-3.550
Horizontal validation criteria: minimum distance (mm)	8.762
Vertical validation criteria: SAR ratio M2/M1 (%)	60.76%

**E. Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.913	0.609	0.370	0.238	0.170

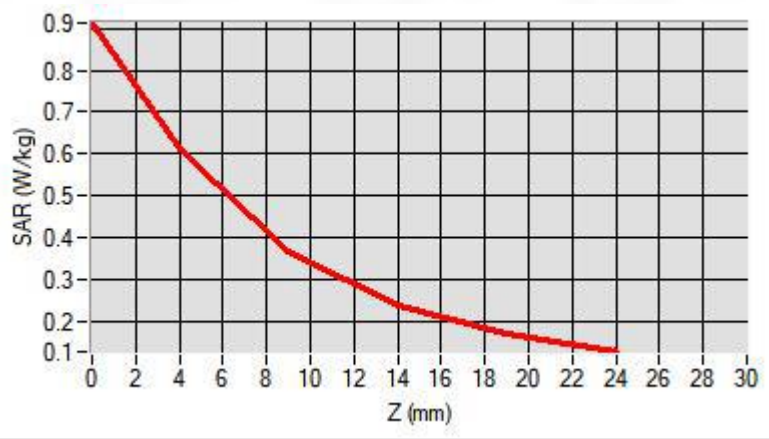

### F. 3D Image

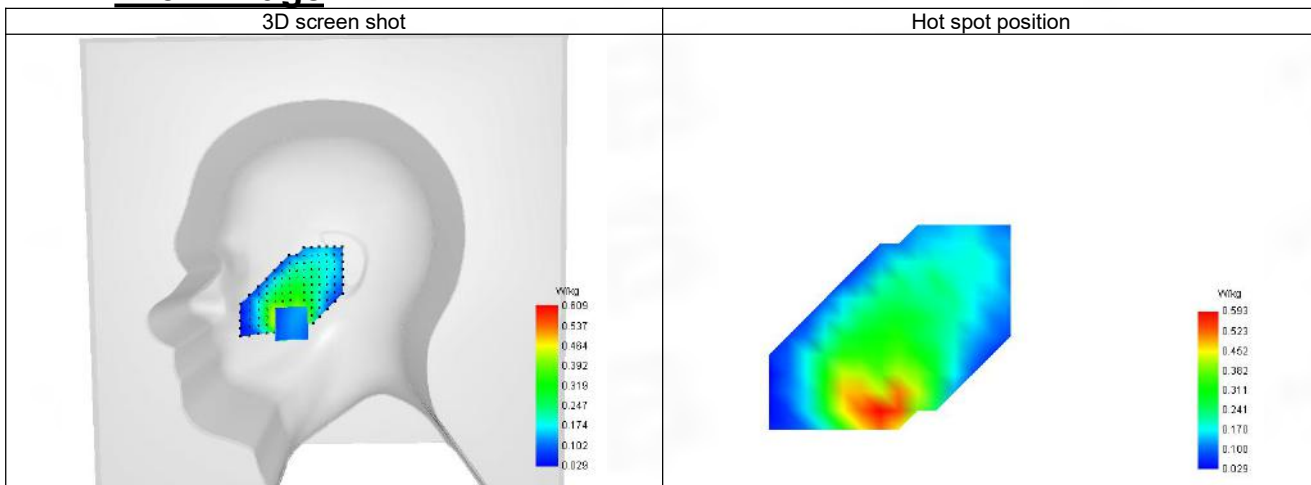



**14-Body with front position in dist. 10mm on Channel 20525 in LTE band 5**

**SAR Measurement at LTE band 5 (Body, Validation Plane)**

Date of measurement: 4/7/2024


**A. Experimental conditions.**

Probe	SN 04/22 EPG0365
ConvF	1.68
Area Scan	dx=8mm dy=8mm, Adaptive 1 max
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm, Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 5
Channels	Middle (20525)
Signal	LTE FDD
Cell Bandwidth	10 Mhz
Modulation	SC-OFDM - QPSK
RB offset	0
RB size	1

**B. Permittivity**

Frequency (MHz)	832.090
Relative permittivity (real part)	41.423
Relative permittivity (imaginary part)	19.557
Conductivity (S/m)	0.870

**C. SAR Surface and Volume**

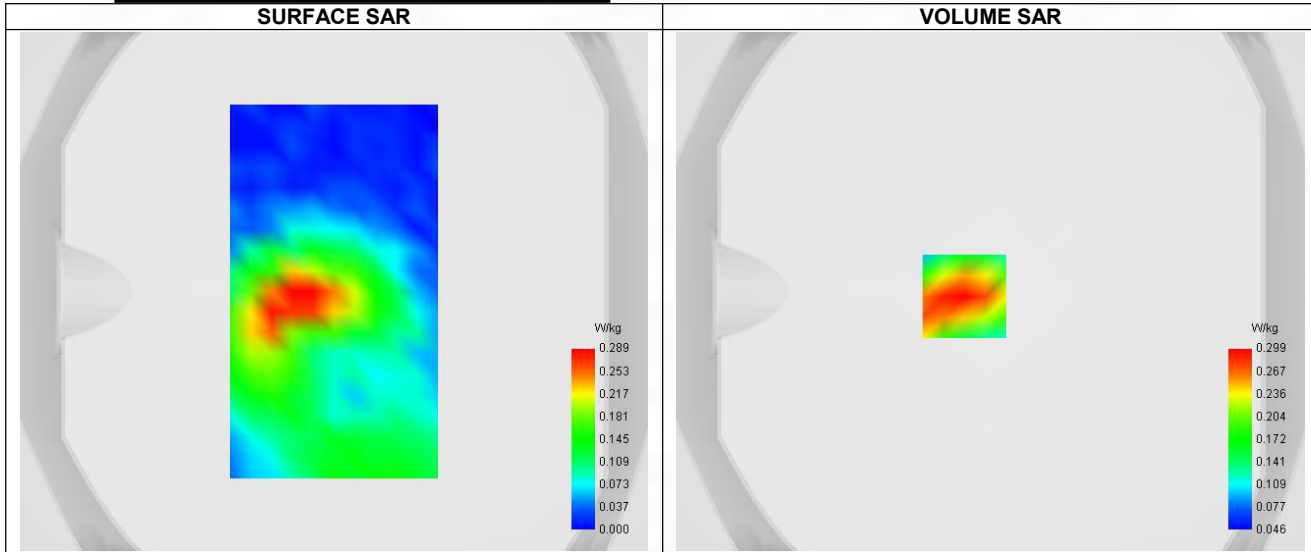


Maximum location: X=-10.00, Y=-2.00 ; SAR Peak: 0.44 W/kg

**D. SAR 1g & 10g**


SAR 10g (W/Kg)	0.182
SAR 1g (W/Kg)	0.285
Variation (%)	-1.600
Horizontal validation criteria: minimum distance (mm)	8.372
Vertical validation criteria: SAR ratio M2/M1 (%)	69.57%

**E. Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.402	0.299	0.208	0.148	0.109

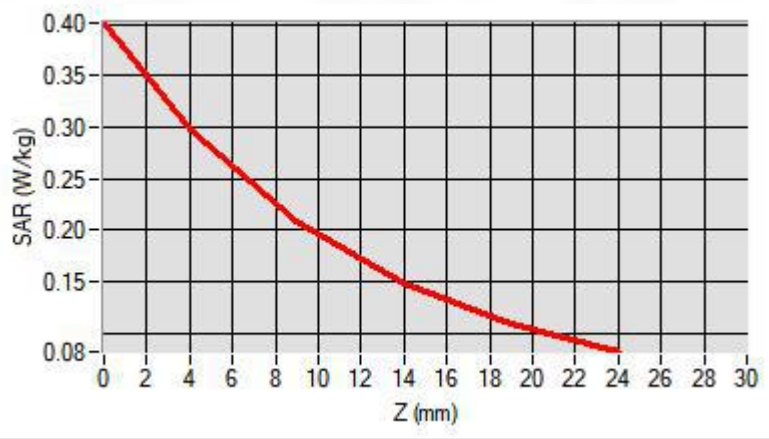

### F. 3D Image

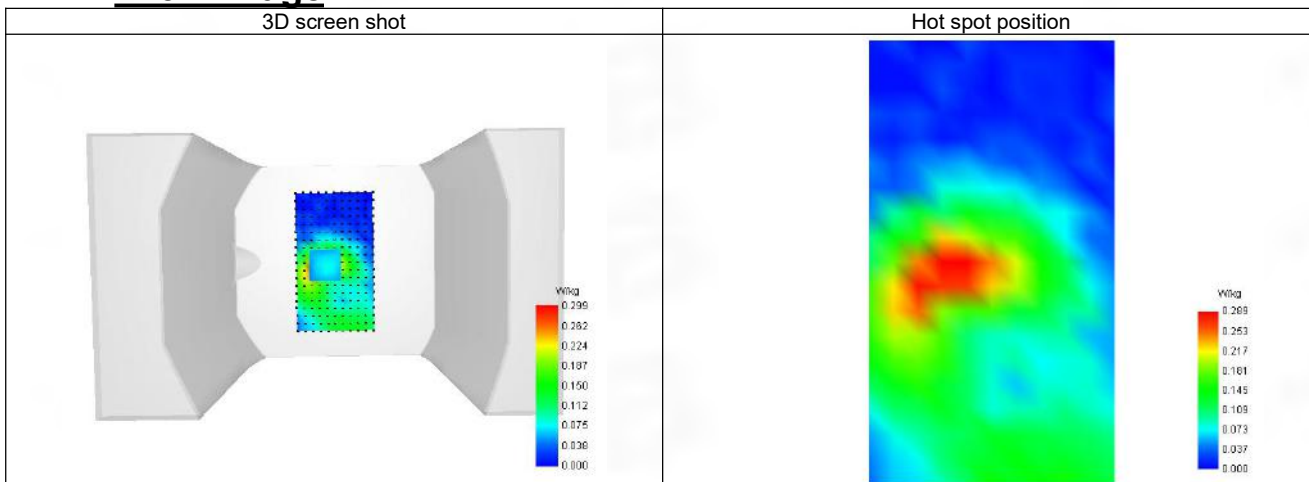

15-Head with front position in dist. 0mm on Channel 21350 in LTE band 7

**SAR Measurement at LTE band 7 (Cheek, Right)**

Date of measurement: 16/7/2024


**A. Experimental conditions.**

Probe	SN 04/22 EPG0365
ConvF	2.40
Area Scan	dx=8mm dy=8mm, Adaptative 1 max
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm, Complete
Phantom	Right head
Device Position	Cheek
Band	LTE band 7
Channels	Higher (21350)
Signal	LTE FDD
Cell Bandwidth	20 Mhz
Modulation	SC-OFDM - QPSK
RB offset	0
RB size	1

**B. Permittivity**

Frequency (MHz)	2551.090
Relative permittivity (real part)	38.945
Relative permittivity (imaginary part)	12.902
Conductivity (S/m)	1.918

**C. SAR Surface and Volume**

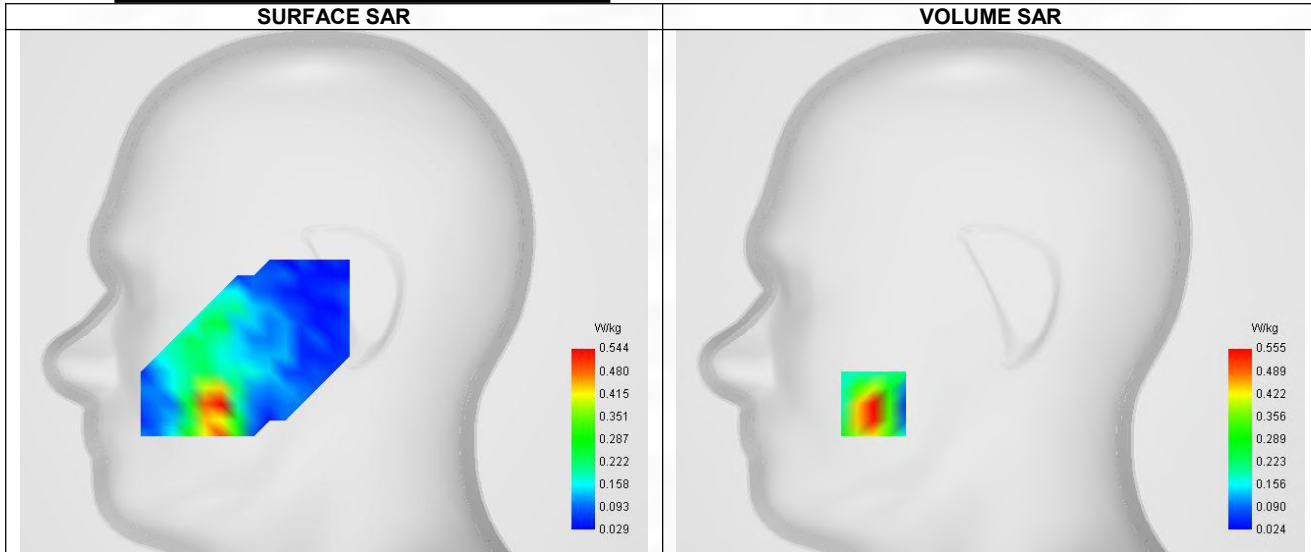


Maximum location: X=-58.00, Y=-56.00 ; SAR Peak: 0.93 W/kg

**D. SAR 1g & 10g**


SAR 10g (W/Kg)	0.269
SAR 1g (W/Kg)	0.528
Variation (%)	-1.490
Horizontal validation criteria: minimum distance (mm)	8.130
Vertical validation criteria: SAR ratio M2/M1 (%)	53.87%

**E. Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.890	0.555	0.299	0.163	0.096

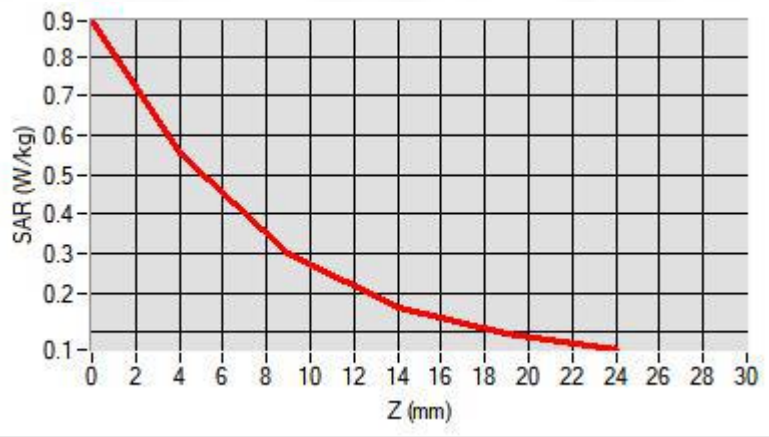

### F. 3D Image

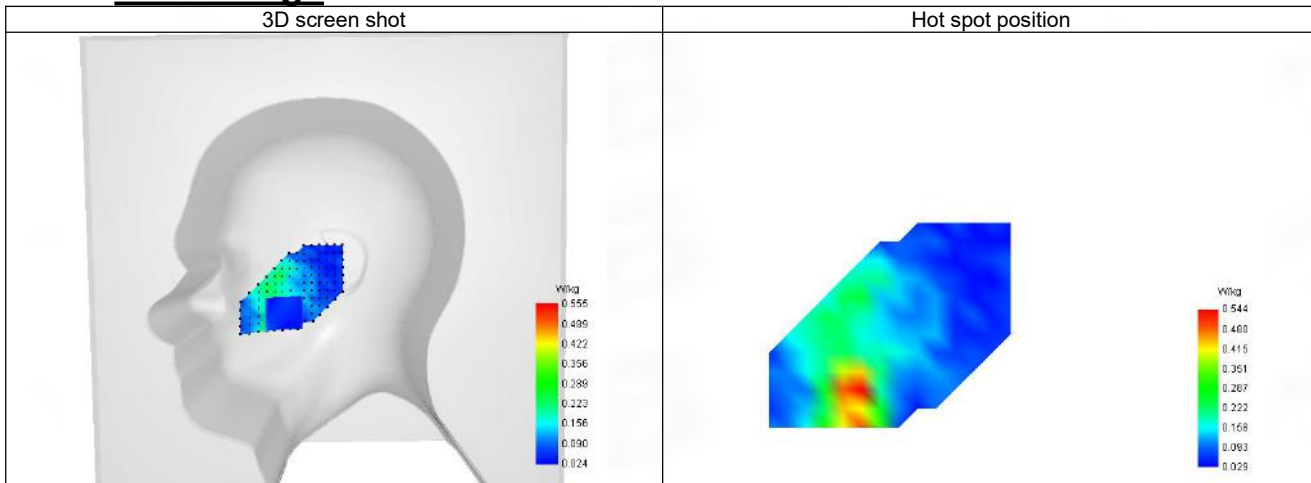

**16-Body with front position in dist. 10mm on Channel 21350 in LTE band 7**

**SAR Measurement at LTE band 7 (Body, Validation Plane)**

Date of measurement: 16/7/2024


**A. Experimental conditions.**

Probe	SN 04/22 EPGO365
ConvF	2.40
Area Scan	dx=8mm dy=8mm, Adaptive 1 max
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm, Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 7
Channels	Higher (21350)
Signal	LTE FDD
Cell Bandwidth	20 Mhz
Modulation	SC-OFDM - QPSK
RB offset	0
RB size	1

**B. Permittivity**

Frequency (MHz)	2551.090
Relative permittivity (real part)	38.945
Relative permittivity (imaginary part)	12.902
Conductivity (S/m)	1.918

**C. SAR Surface and Volume**

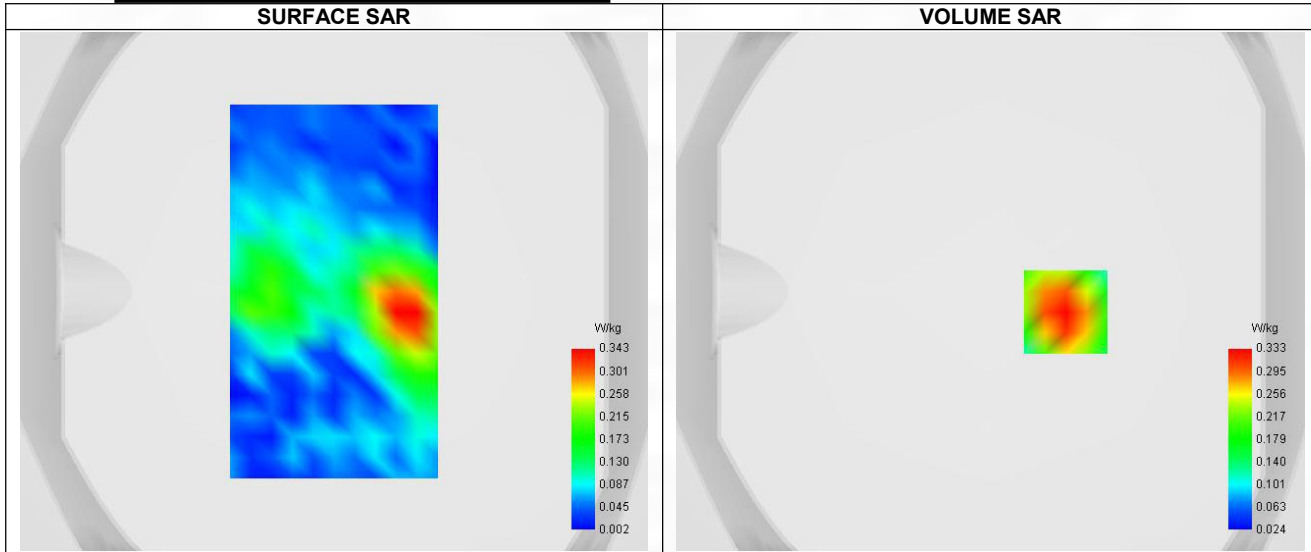


Maximum location: X=29.00, Y=-8.00 ; SAR Peak: 0.50 W/kg

**D. SAR 1g & 10g**


SAR 10g (W/Kg)	0.190
SAR 1g (W/Kg)	0.317
Variation (%)	-4.920
Horizontal validation criteria: minimum distance (mm)	8.152
Vertical validation criteria: SAR ratio M2/M1 (%)	62.16%

**E. Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.488	0.333	0.207	0.133	0.092

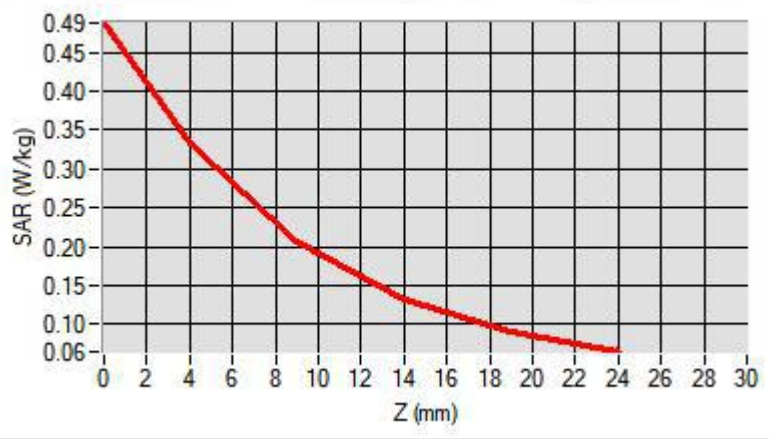

### F. 3D Image

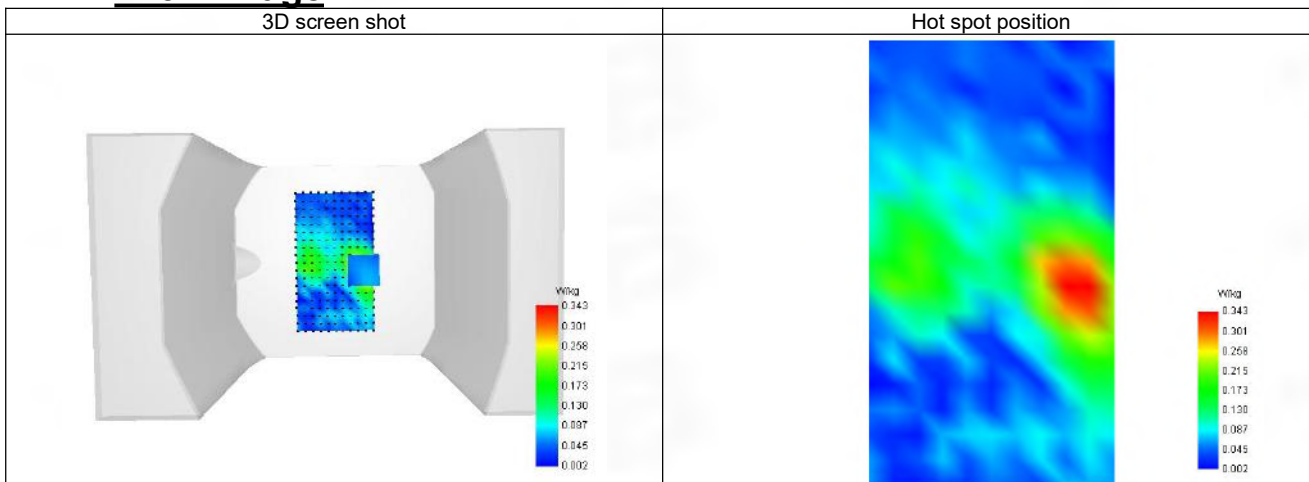

**17-Head with front position in dist. 0mm on Channel 23230 in LTE band 13**

**SAR Measurement at LTE band 13 (Cheek, Right)**

Date of measurement: 2/7/2024


**A. Experimental conditions.**

Probe	SN 04/22 EPG0365
ConvF	1.65
Area Scan	dx=8mm dy=8mm, Adaptative 1 max
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm, Complete
Phantom	Right head
Device Position	Cheek
Band	LTE band 13
Channels	Middle (23230)
Signal	LTE FDD
Cell Bandwidth	10 Mhz
Modulation	SC-OFDM - QPSK
RB offset	0
RB size	1

**B. Permittivity**

Frequency (MHz)	777.590
Relative permittivity (real part)	41.673
Relative permittivity (imaginary part)	20.821
Conductivity (S/m)	0.863

**C. SAR Surface and Volume**

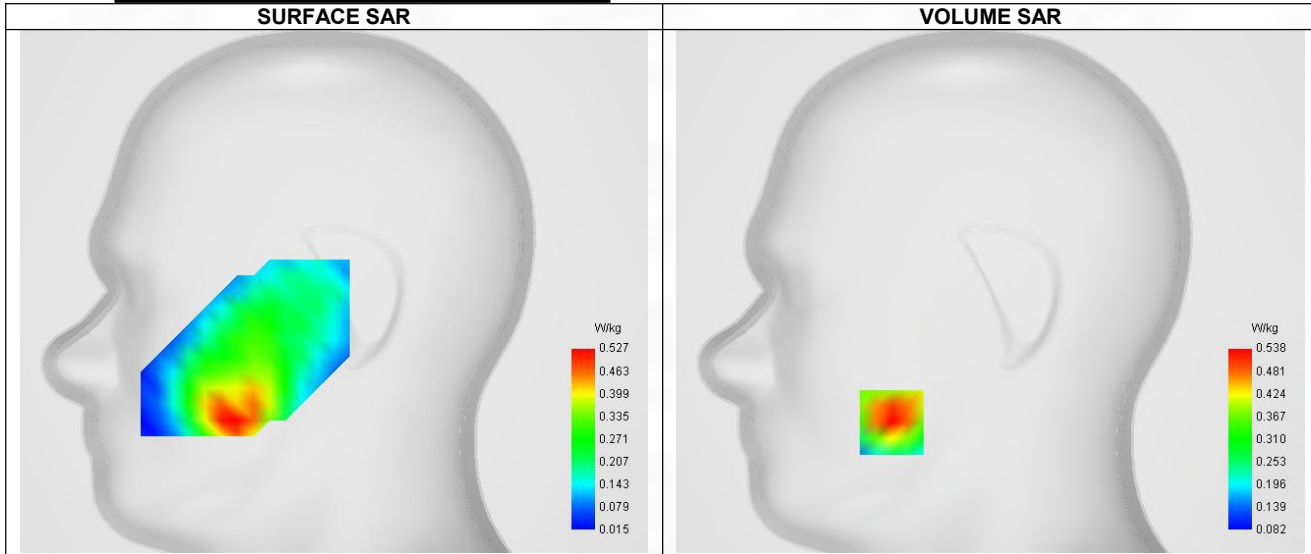


Maximum location: X=-49.00, Y=-65.00 ; SAR Peak: 0.84 W/kg

**D. SAR 1g & 10g**


SAR 10g (W/Kg)	0.311
SAR 1g (W/Kg)	0.511
Variation (%)	3.420
Horizontal validation criteria: minimum distance (mm)	8.045
Vertical validation criteria: SAR ratio M2/M1 (%)	58.92%

**E. Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.822	0.538	0.317	0.200	0.142

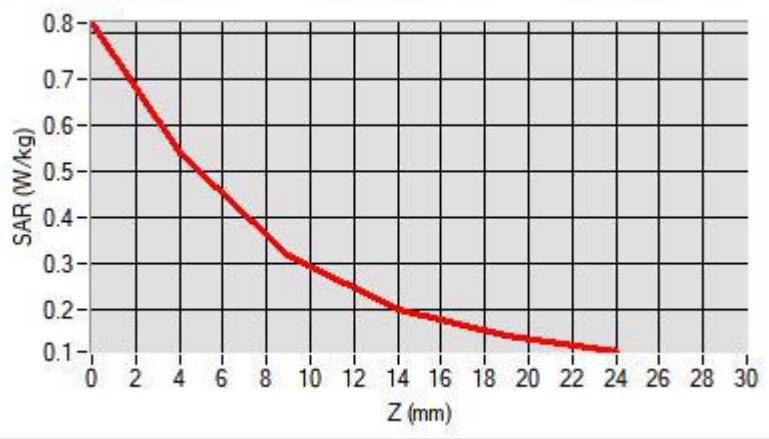

### F. 3D Image

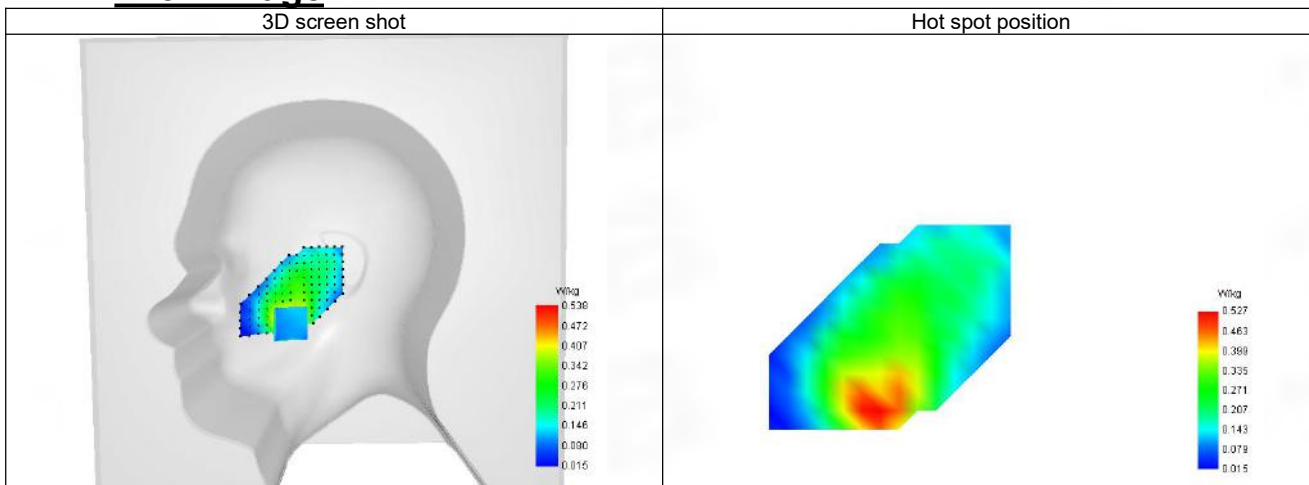



**18-Body with front position in dist. 10mm on Channel 23230 in LTE band 13**

**SAR Measurement at LTE band 13 (Body, Validation Plane)**

Date of measurement: 2/7/2024


**A. Experimental conditions.**

Probe	SN 04/22 EPGO365
ConvF	1.65
Area Scan	dx=8mm dy=8mm, Adaptative 1 max
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm, Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 13
Channels	Middle (23230)
Signal	LTE FDD
Cell Bandwidth	10 Mhz
Modulation	SC-OFDM - QPSK
RB offset	0
RB size	1

**B. Permittivity**

Frequency (MHz)	777.590
Relative permittivity (real part)	41.673
Relative permittivity (imaginary part)	20.821
Conductivity (S/m)	0.863

**C. SAR Surface and Volume**

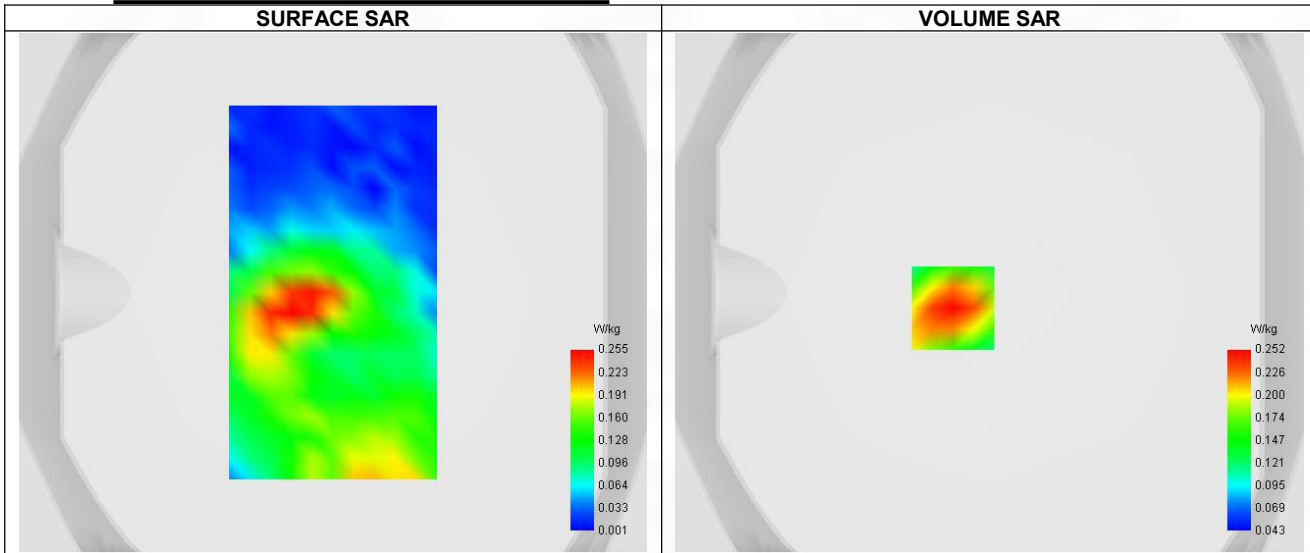

Maximum location: X=-14.00, Y=-6.00 ; SAR Peak: 0.36 W/kg


**D. SAR 1g & 10g**

SAR 10g (W/Kg)	0.152
SAR 1g (W/Kg)	0.239
Variation (%)	-3.230
Horizontal validation criteria: minimum distance (mm)	8.438
Vertical validation criteria: SAR ratio M2/M1 (%)	65.48%


**E. Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00
--------	------	------	------	-------	-------

SAR (W/Kg)	0.357	0.252	0.165	0.113	0.082
------------	-------	-------	-------	-------	-------

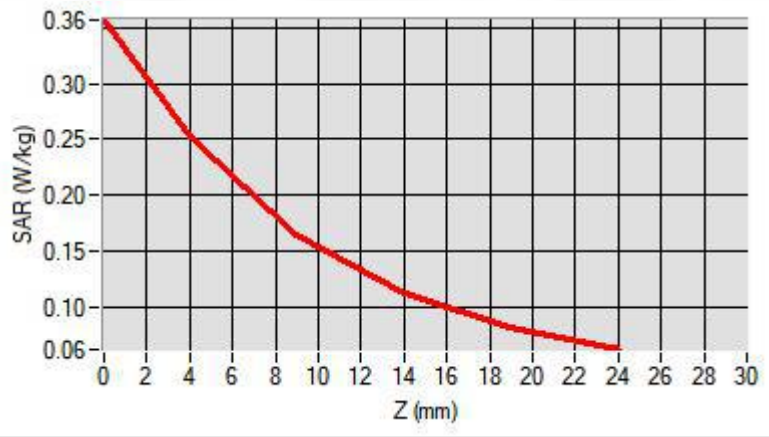

### F. 3D Image

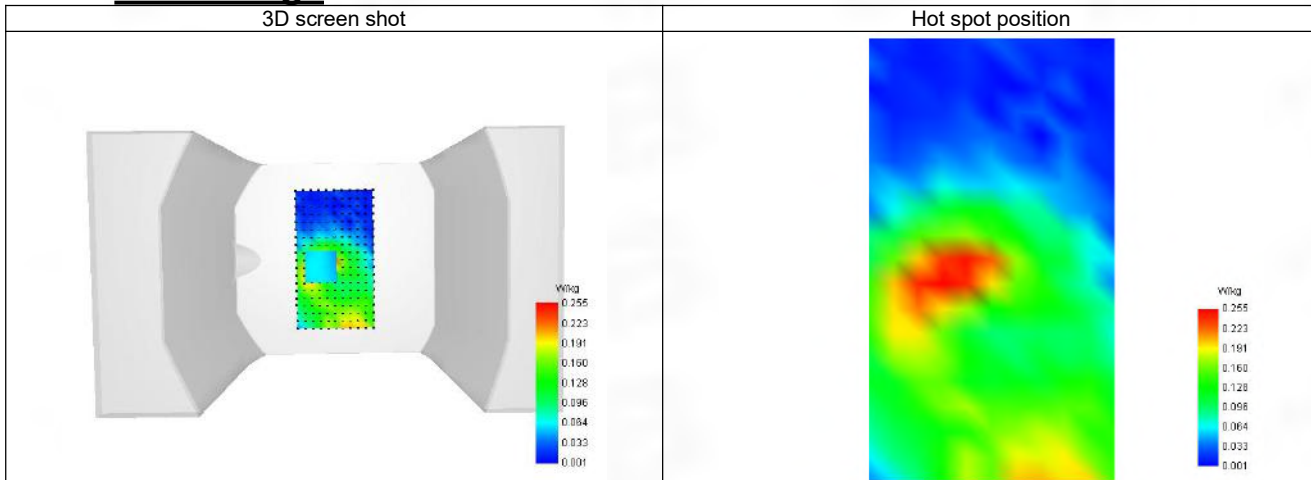

**19-Head with front position in dist. 0mm on Channel 23800 in LTE band 17**

**SAR Measurement at LTE band 17 (Cheek, Right)**

Date of measurement: 2/7/2024


**A. Experimental conditions.**

Probe	SN 04/22 EPG0365
ConvF	1.65
Area Scan	dx=8mm dy=8mm, Adaptative 1 max
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Right head
Device Position	Cheek
Band	LTE band 17
Channels	Higher (23800)
Signal	LTE FDD
Cell Bandwidth	10 Mhz
Modulation	SC-OFDM - QPSK
RB offset	0
RB size	1

**B. Permittivity**

Frequency (MHz)	706.590
Relative permittivity (real part)	41.999
Relative permittivity (imaginary part)	22.466
Conductivity (S/m)	0.855

**C. SAR Surface and Volume**

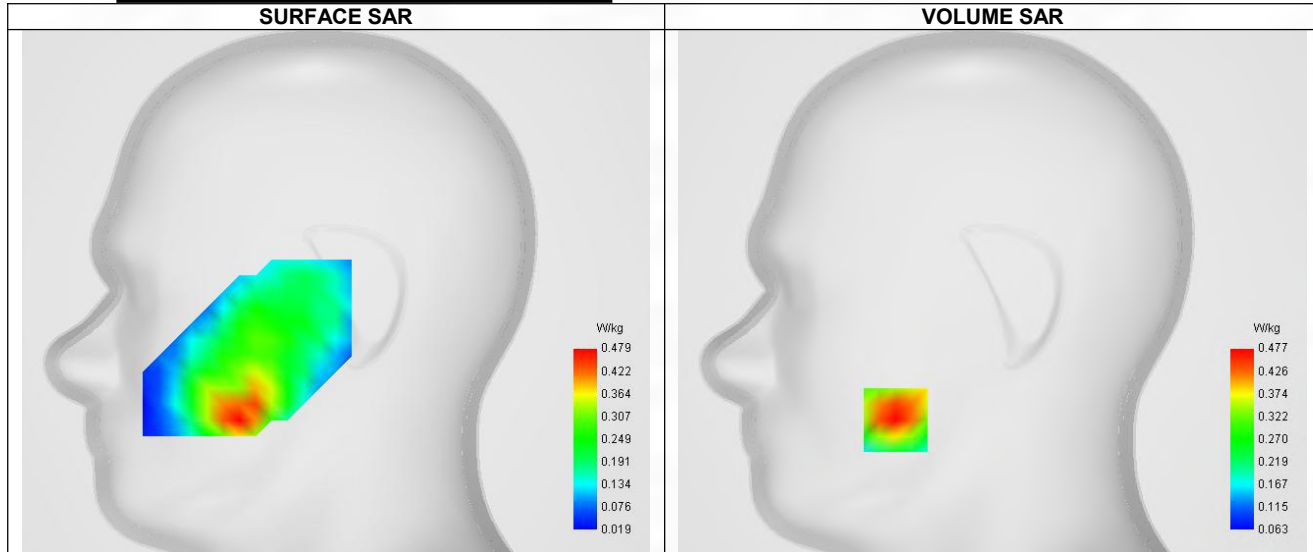


Maximum location: X=-48.00, Y=-64.00 ; SAR Peak: 0.68 W/kg

**D. SAR 1g & 10g**


SAR 10g (W/Kg)	0.289
SAR 1g (W/Kg)	0.455
Variation (%)	2.500
Horizontal validation criteria: minimum distance (mm)	8.149
Vertical validation criteria: SAR ratio M2/M1 (%)	65.62%

**E. Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.673	0.477	0.313	0.215	0.158

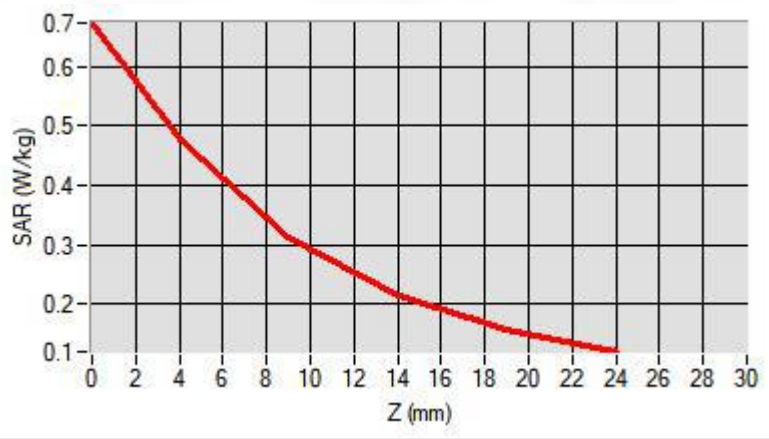

### F. 3D Image

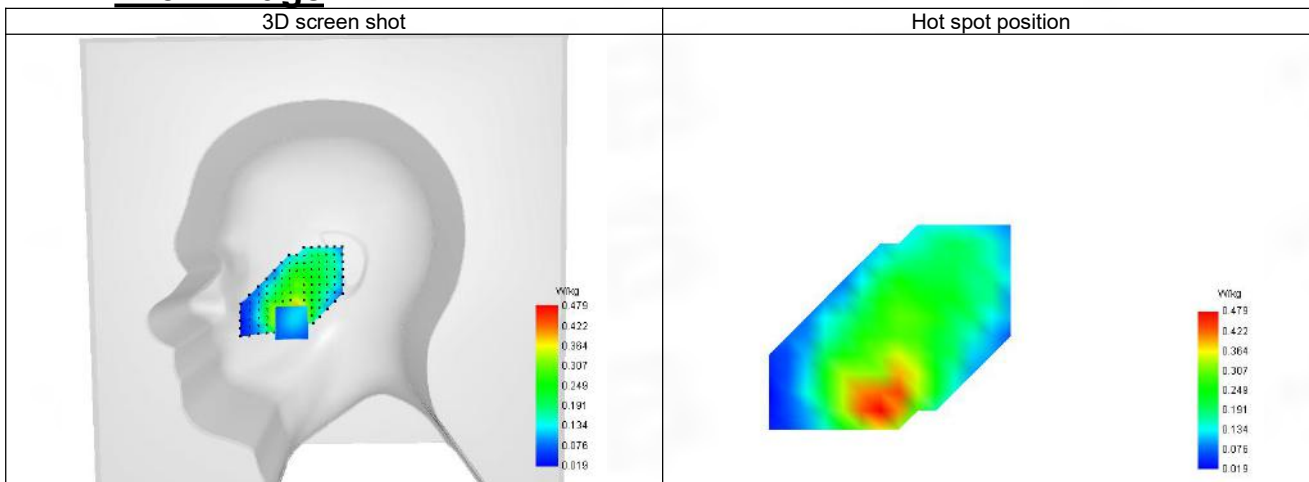

**20-Body with front position in dist. 10mm on Channel 23800 in LTE band 17**

**SAR Measurement at LTE band 17 (Body, Validation Plane)**

Date of measurement: 2/7/2024


**A. Experimental conditions.**

Probe	SN 04/22 EPG0365
ConvF	1.65
Area Scan	dx=8mm dy=8mm, Adaptative 1 max
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm, Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 17
Channels	Higher (23800)
Signal	LTE FDD
Cell Bandwidth	10 Mhz
Modulation	SC-OFDM - QPSK
RB offset	0
RB size	1

**B. Permittivity**

Frequency (MHz)	706.590
Relative permittivity (real part)	41.999
Relative permittivity (imaginary part)	22.466
Conductivity (S/m)	0.855

**C. SAR Surface and Volume**

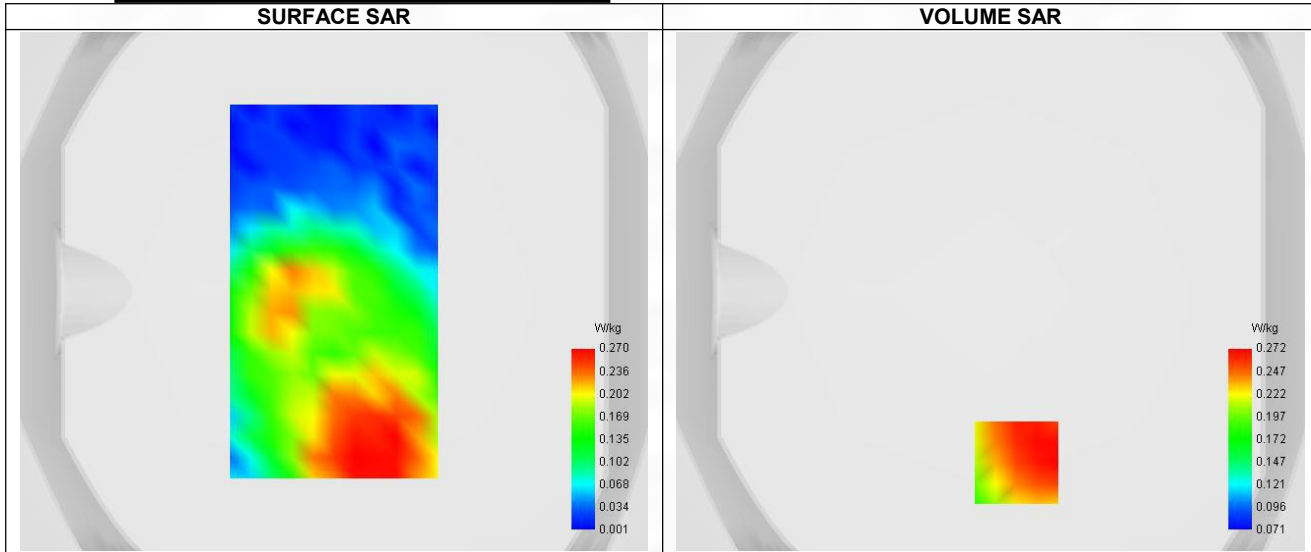


Maximum location: X=10.00, Y=-66.00 ; SAR Peak: 0.34 W/kg

**D. SAR 1g & 10g**


SAR 10g (W/Kg)	0.203
SAR 1g (W/Kg)	0.264
Variation (%)	-2.080
Horizontal validation criteria: minimum distance (mm)	8.295
Vertical validation criteria: SAR ratio M2/M1 (%)	58.82%

**E. Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.774	0.272	0.160	0.165	0.102

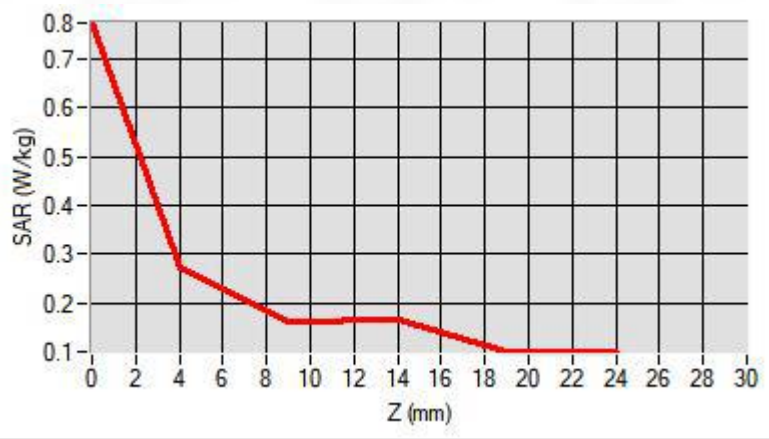

### F. 3D Image

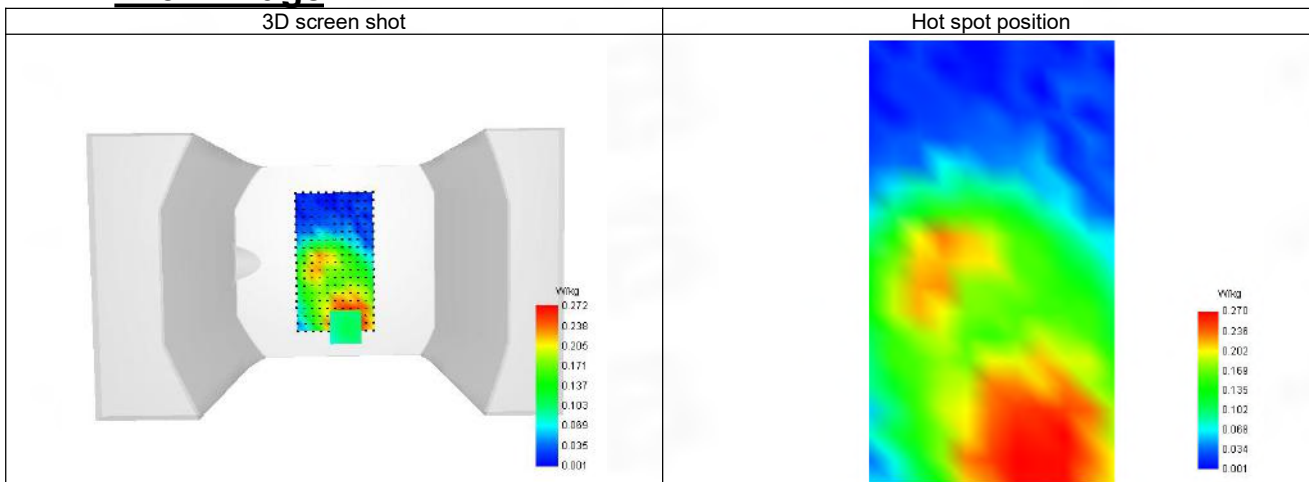

**21-Head with front position in dist. 0mm on Channel 38150 in LTE band 38**

**SAR Measurement at LTE band 38 (Cheek, Right)**

Date of measurement: 16/7/2024


**A. Experimental conditions.**

Probe	SN 04/22 EPG0365
ConvF	2.40
Area Scan	dx=8mm dy=8mm, Adaptive 1 max
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm, Complete
Phantom	Right head
Device Position	Cheek
Band	LTE band 38
Channels	Higher (38150)
Signal	LTE TDD
Cell Bandwidth	20 Mhz
Modulation	SC-OFDM - QPSK
RB offset	0
RB size	1
Subframe configuration	0
Special subframe configuration	0
Cyclic prefix	Normal
Duty Cycle (%)	0.61

**B. Permittivity**

Frequency (MHz)	2601.090
Relative permittivity (real part)	38.879
Relative permittivity (imaginary part)	12.691
Conductivity (S/m)	1.971

**C. SAR Surface and Volume**

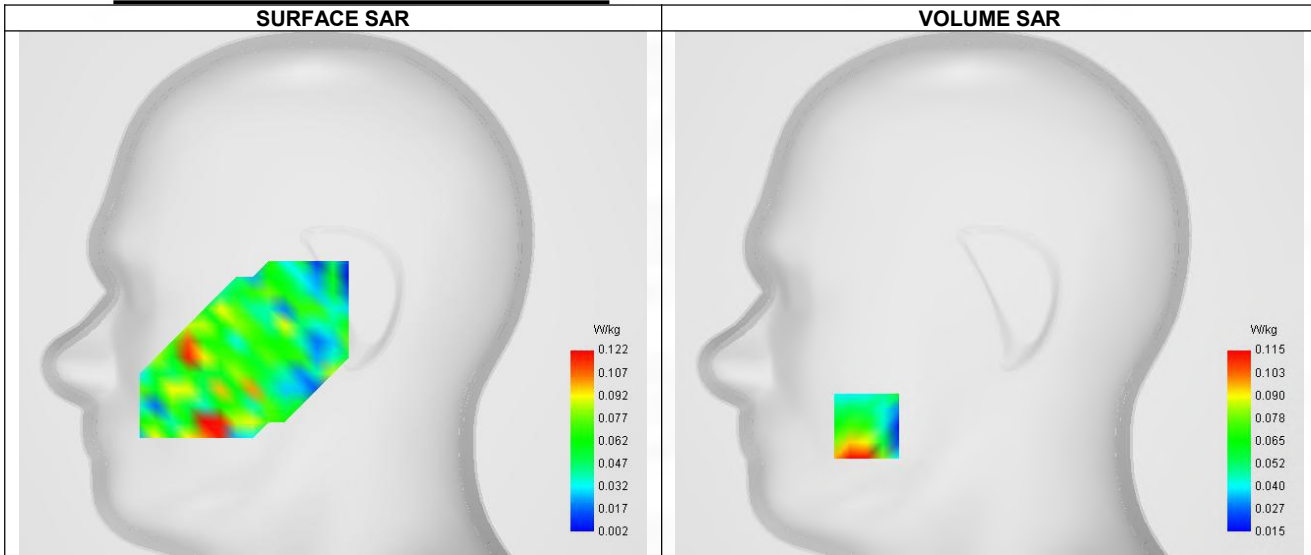

Maximum location: X=-61.00, Y=-66.00 ; SAR Peak: 0.16 W/kg


**D. SAR 1g & 10g**

SAR 10g (W/Kg)	0.086
SAR 1g (W/Kg)	0.102
Variation (%)	-3.680
Horizontal validation criteria: minimum distance (mm)	8.715


Vertical validation criteria: SAR ratio M2/M1 (%)	64.35%
---	--------

### E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.275	0.115	0.074	0.070	0.050

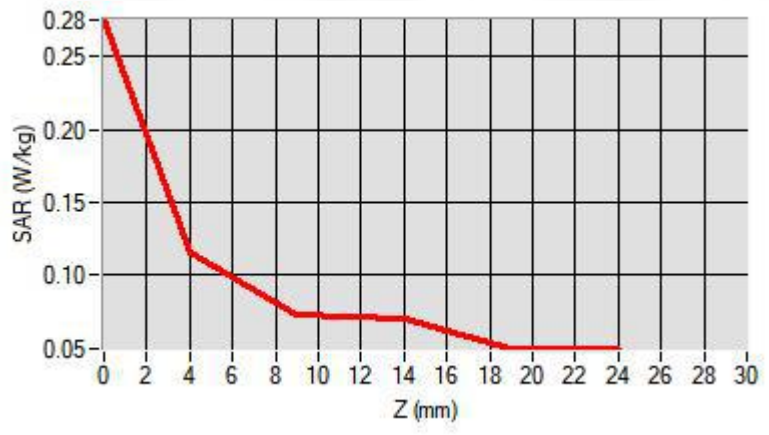

### F. 3D Image

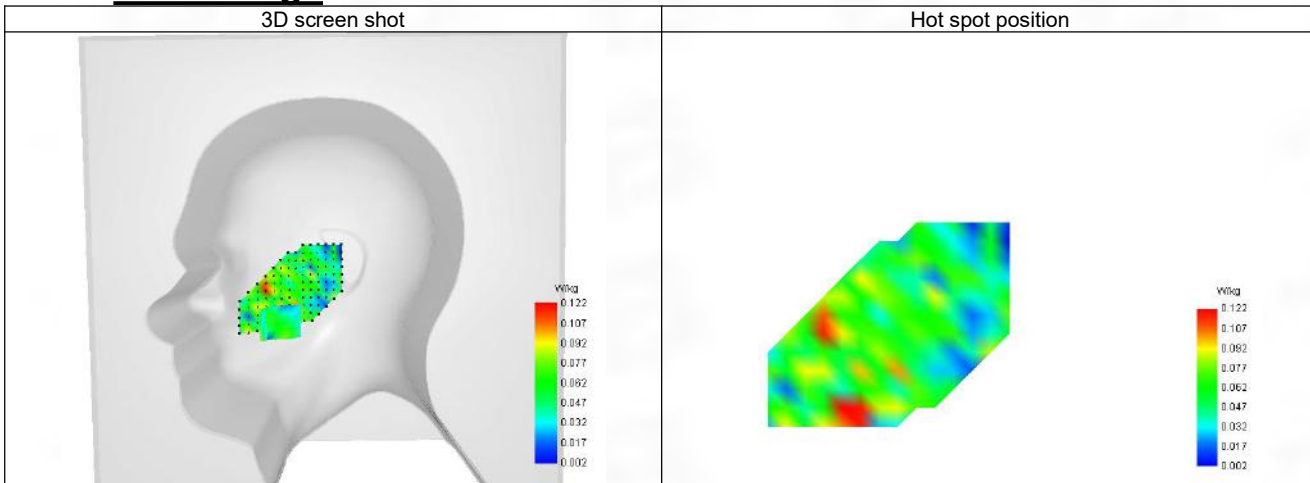



22-Body with front position in dist. 10mm on Channel 38150 in LTE band 38

**SAR Measurement at LTE band 38 (Body, Validation Plane)**

Date of measurement: 16/7/2024


**A. Experimental conditions.**

Probe	SN 04/22 EPG0365
ConvF	2.40
Area Scan	dx=8mm dy=8mm, Adaptive 1 max
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm, Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 38
Channels	Higher (38150)
Signal	LTE TDD
Cell Bandwidth	20 Mhz
Modulation	SC-OFDM - QPSK
RB offset	0
RB size	1
Subframe configuration	0
Special subframe configuration	0
Cyclic prefix	Normal
Duty Cycle (%)	0.61

**B. Permittivity**

Frequency (MHz)	2601.090
Relative permittivity (real part)	38.879
Relative permittivity (imaginary part)	12.691
Conductivity (S/m)	1.971

**C. SAR Surface and Volume**

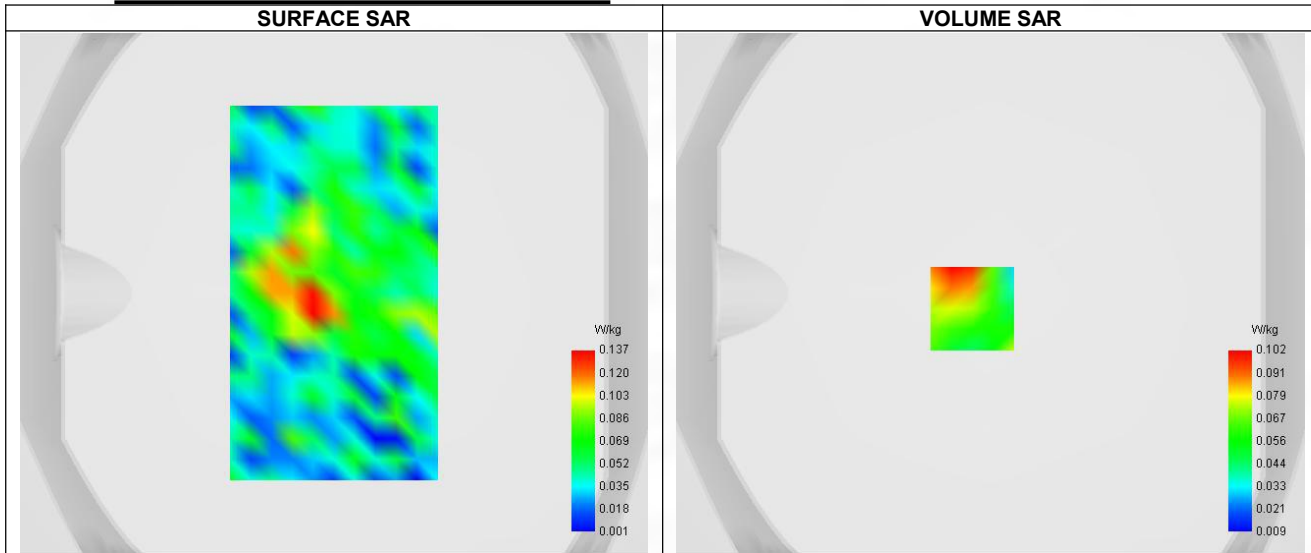

Maximum location: X=-7.00, Y=-6.00 ; SAR Peak: 0.16 W/kg


**D. SAR 1g & 10g**

SAR 10g (W/Kg)	0.064
SAR 1g (W/Kg)	0.095
Variation (%)	1.820
Horizontal validation criteria: minimum distance (mm)	8.663


Vertical validation criteria: SAR ratio M2/M1 (%)	53.92%
---	--------

### E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.145	0.102	0.055	0.042	0.048

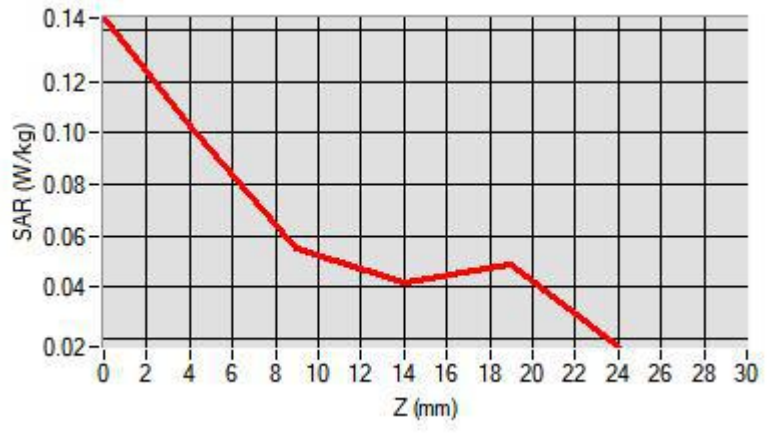

### F. 3D Image

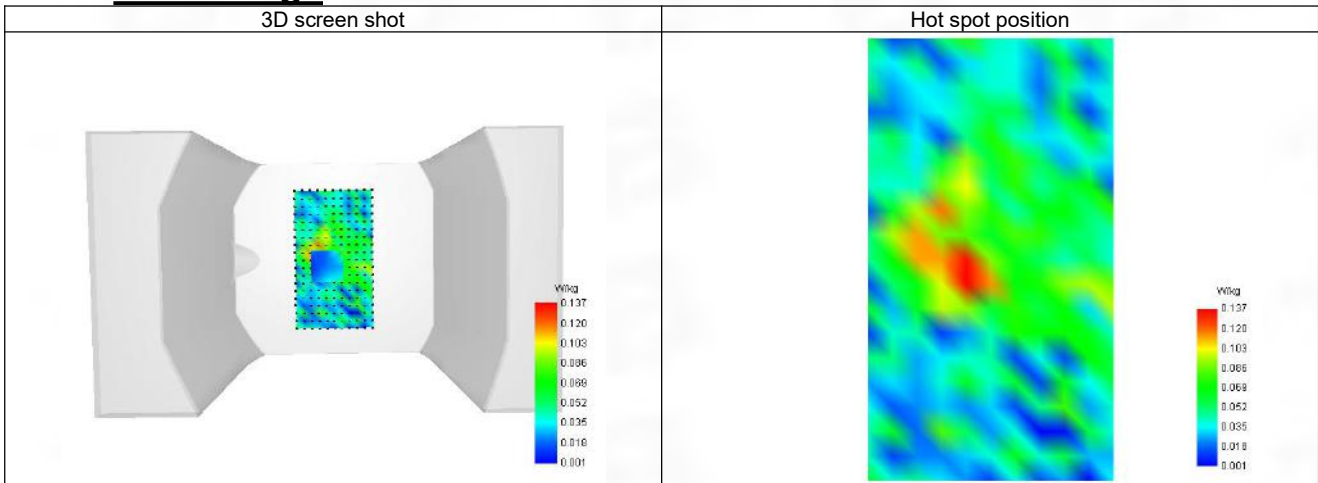

**23-Head with front position in dist. 0mm on Channel 41140 in LTE band 41**

**SAR Measurement at LTE band 41 (Cheek, Right)**

Date of measurement: 16/7/2024


**A. Experimental conditions.**

Probe	SN 04/22 EPG0365
ConvF	2.40
Area Scan	dx=8mm dy=8mm, Adaptive 1 max
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm, Complete
Phantom	Right head
Device Position	Cheek
Band	LTE band 41
Channels	Higher (41140)
Signal	LTE TDD
Cell Bandwidth	20 Mhz
Modulation	SC-OFDM - QPSK
RB offset	0
RB size	1
Subframe configuration	0
Special subframe configuration	0
Cyclic prefix	Normal
Duty Cycle (%)	0.61

**B. Permittivity**

Frequency (MHz)	2636.090
Relative permittivity (real part)	38.838
Relative permittivity (imaginary part)	12.739
Conductivity (S/m)	2.008

**C. SAR Surface and Volume**

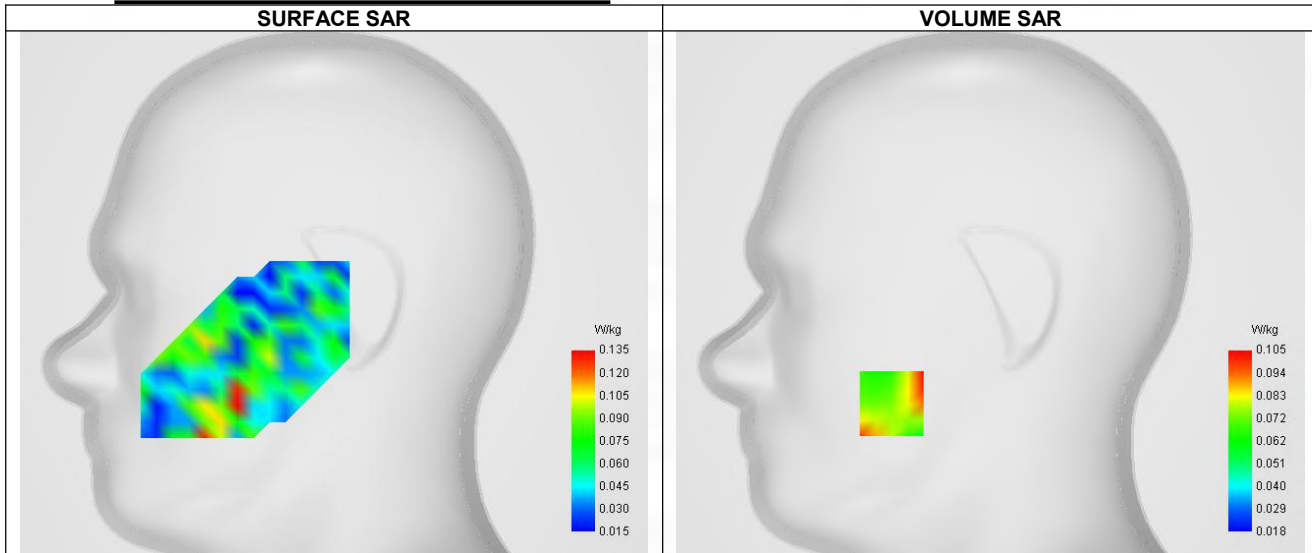

Maximum location: X=-49.00, Y=-55.00 ; SAR Peak: 0.23 W/kg


**D. SAR 1g & 10g**

SAR 10g (W/Kg)	0.084
SAR 1g (W/Kg)	0.105
Variation (%)	4.360
Horizontal validation criteria: minimum distance (mm)	8.754


Vertical validation criteria: SAR ratio M2/M1 (%)	98.10%
---	--------

### E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	-0.402	0.105	0.103	0.018	0.078

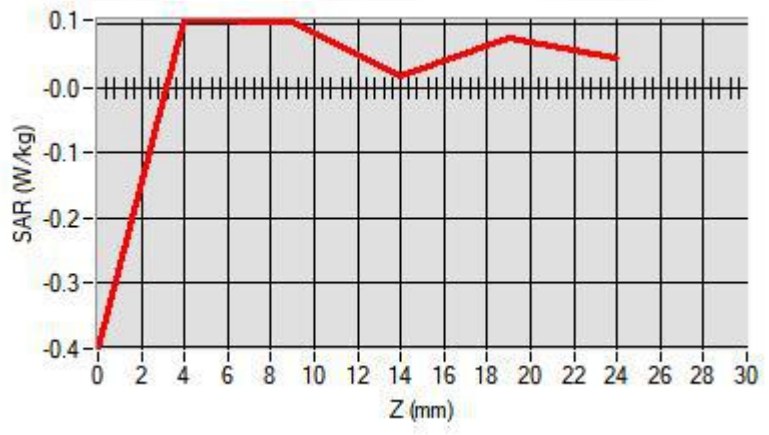

### F. 3D Image

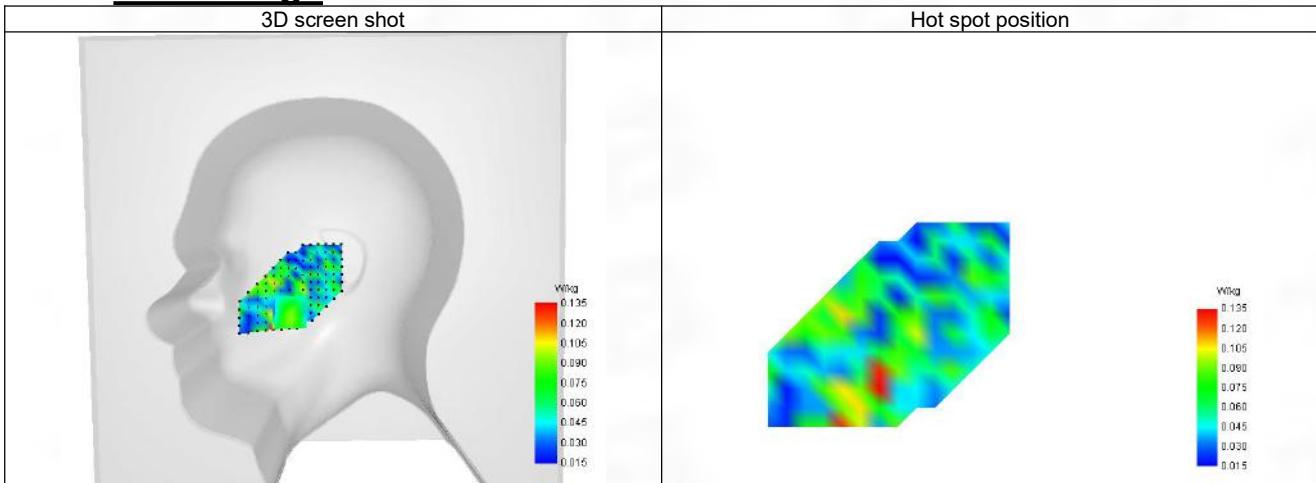

**24-Body with front position in dist. 10mm on Channel 41140 in LTE band 41**

**SAR Measurement at LTE band 41 (Body, Validation Plane)**

Date of measurement: 16/7/2024


**A. Experimental conditions.**

Probe	SN 04/22 EPG0365
ConvF	2.40
Area Scan	dx=8mm dy=8mm, Adaptive 1 max
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm, Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 41
Channels	Higher (41140)
Signal	LTE TDD
Cell Bandwidth	20 Mhz
Modulation	SC-OFDM - QPSK
RB offset	0
RB size	1
Subframe configuration	0
Special subframe configuration	0
Cyclic prefix	Normal
Duty Cycle (%)	0.61

**B. Permittivity**

Frequency (MHz)	2636.090
Relative permittivity (real part)	38.838
Relative permittivity (imaginary part)	12.739
Conductivity (S/m)	2.008

**C. SAR Surface and Volume**

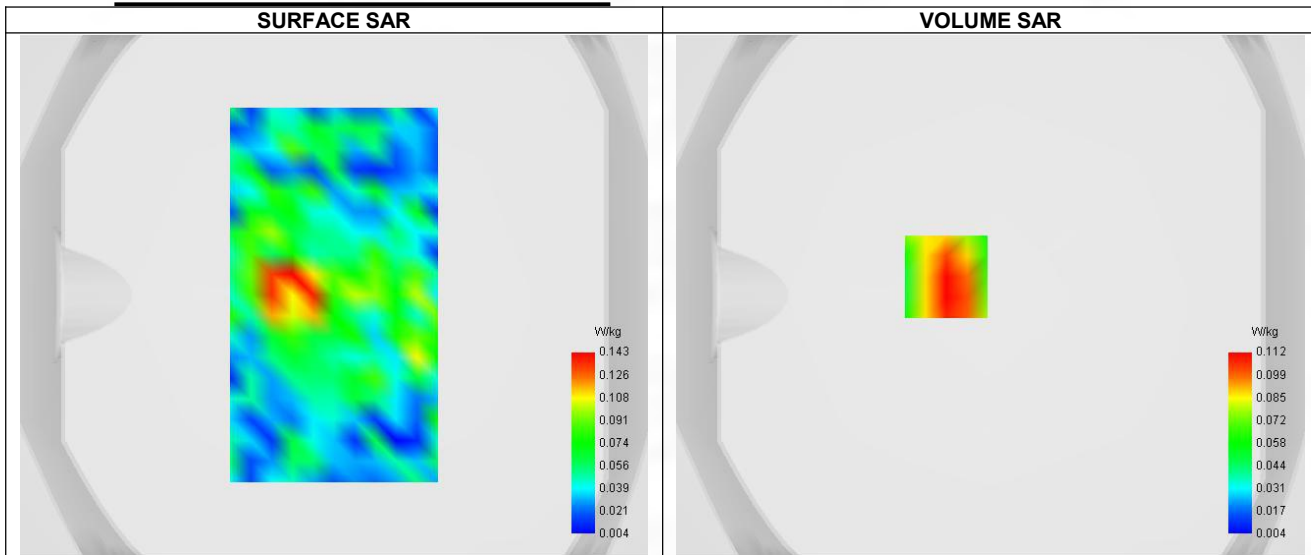

Maximum location: X=-17.00, Y=7.00 ; SAR Peak: 0.22 W/kg


**D. SAR 1g & 10g**

SAR 10g (W/Kg)	0.074
SAR 1g (W/Kg)	0.122
Variation (%)	2.580
Horizontal validation criteria: minimum distance (mm)	8.172


Vertical validation criteria: SAR ratio M2/M1 (%)	42.86%
---	--------

### E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.292	0.112	0.048	0.044	0.034

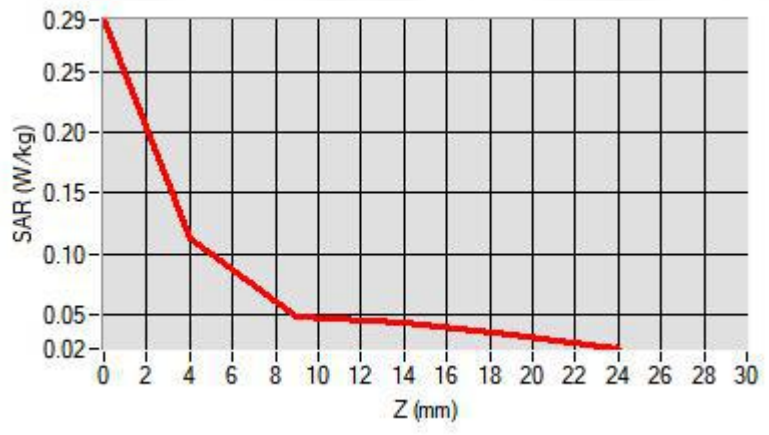

### F. 3D Image

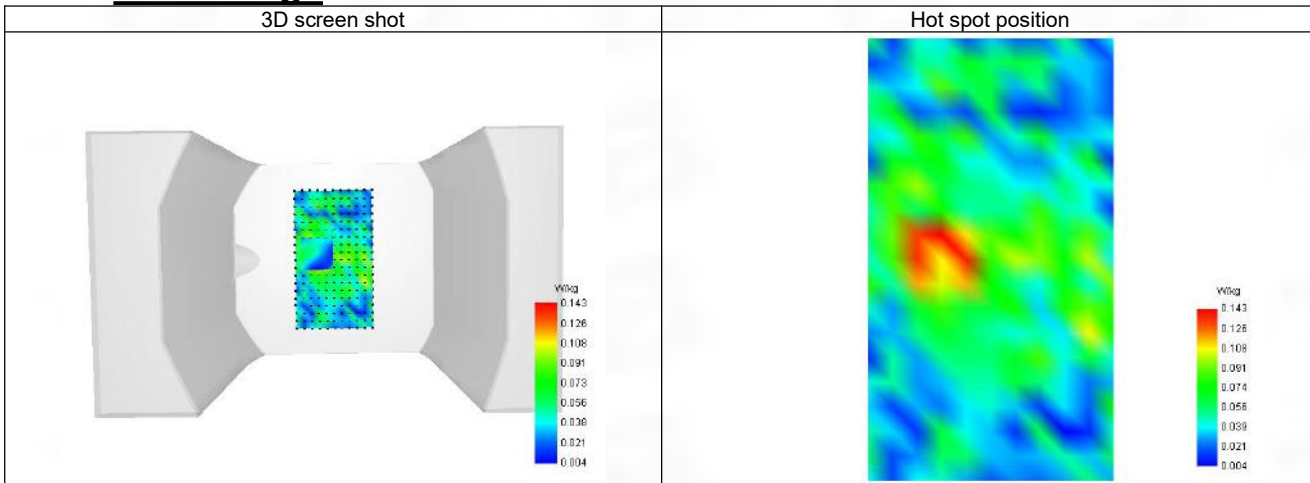

**25-Head with front position in dist. 0mm on Channel 11 in IEEE 802.11b ISM**

**SAR Measurement at IEEE 802.11b ISM (Cheek, Right)**

Date of measurement: 12/7/2024


**A. Experimental conditions.**

Probe	SN 04/22 EPGO365
ConvF	2.36
Area Scan	dx=8mm dy=8mm, Adaptative 1 max
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm, Complete
Phantom	Right head
Device Position	Cheek
Band	IEEE 802.11b ISM
Channels	Higher (11)
Signal	IEEE 802.11

**B. Permittivity**

Frequency (MHz)	2462.000
Relative permittivity (real part)	39.064
Relative permittivity (imaginary part)	13.288
Conductivity (S/m)	1.823

**C. SAR Surface and Volume**

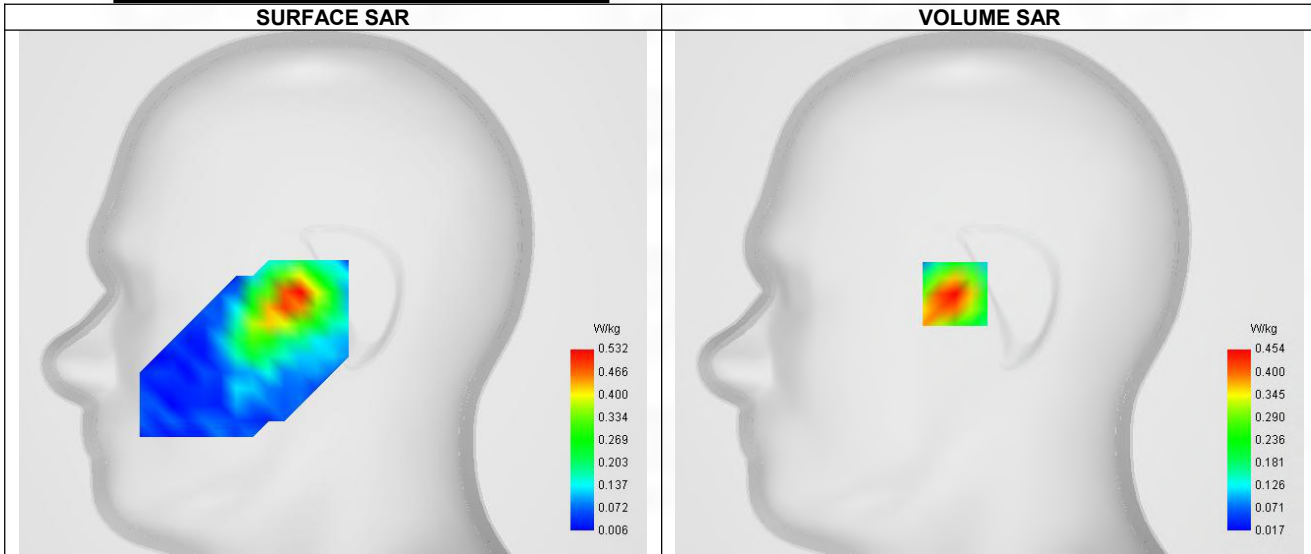


Maximum location: X=-17.00, Y=-1.00 ; SAR Peak: 0.83 W/kg

**D. SAR 1g & 10g**


SAR 10g (W/Kg)	0.223
SAR 1g (W/Kg)	0.408
Variation (%)	-4.990
Horizontal validation criteria: minimum distance (mm)	8.823
Vertical validation criteria: SAR ratio M2/M1 (%)	44.71%

**E. Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.831	0.454	0.203	0.097	0.059

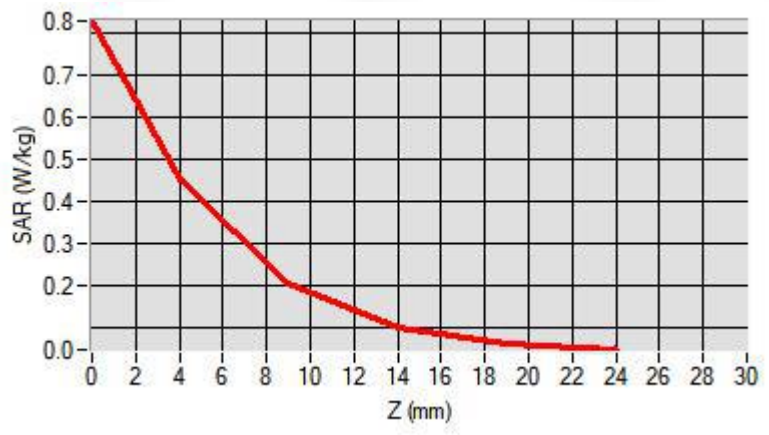

### F. 3D Image

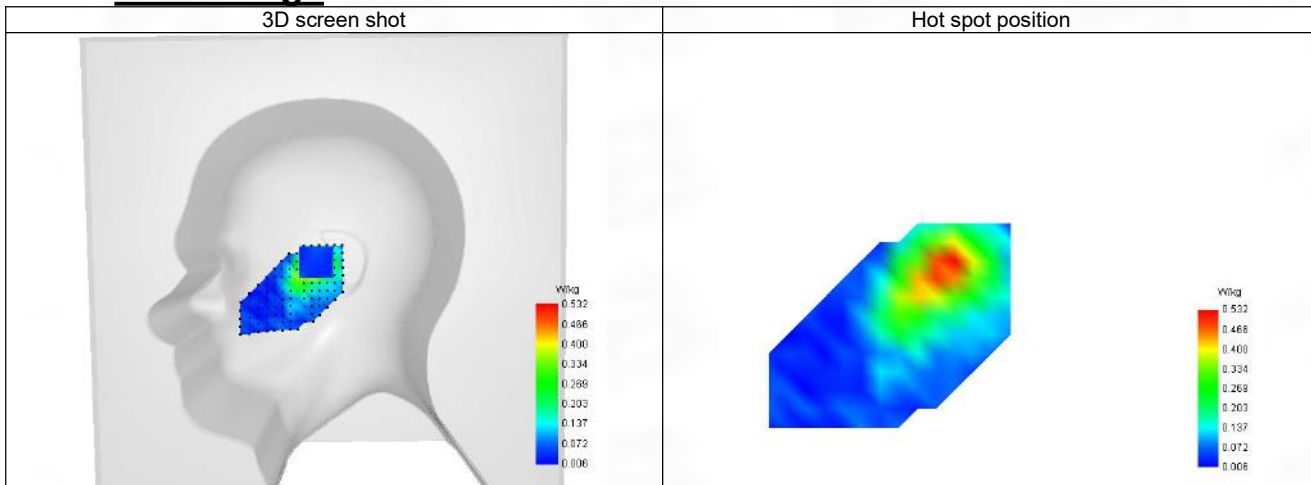



**26-Body with back position in dist. 10mm on Channel 11 in IEEE 802.11b ISM**

**SAR Measurement at IEEE 802.11b ISM (Body, Validation Plane)**

Date of measurement: 12/7/2024


**A. Experimental conditions.**

Probe	SN 04/22 EPGO365
ConvF	2.36
Area Scan	dx=8mm dy=8mm, Adaptative 1 max
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm, Complete
Phantom	Validation plane
Device Position	Body
Band	IEEE 802.11b ISM
Channels	Higher (11)
Signal	IEEE 802.11

**B. Permittivity**

Frequency (MHz)	2462.000
Relative permittivity (real part)	41.189
Relative permittivity (imaginary part)	13.288
Conductivity (S/m)	1.823

**C. SAR Surface and Volume**

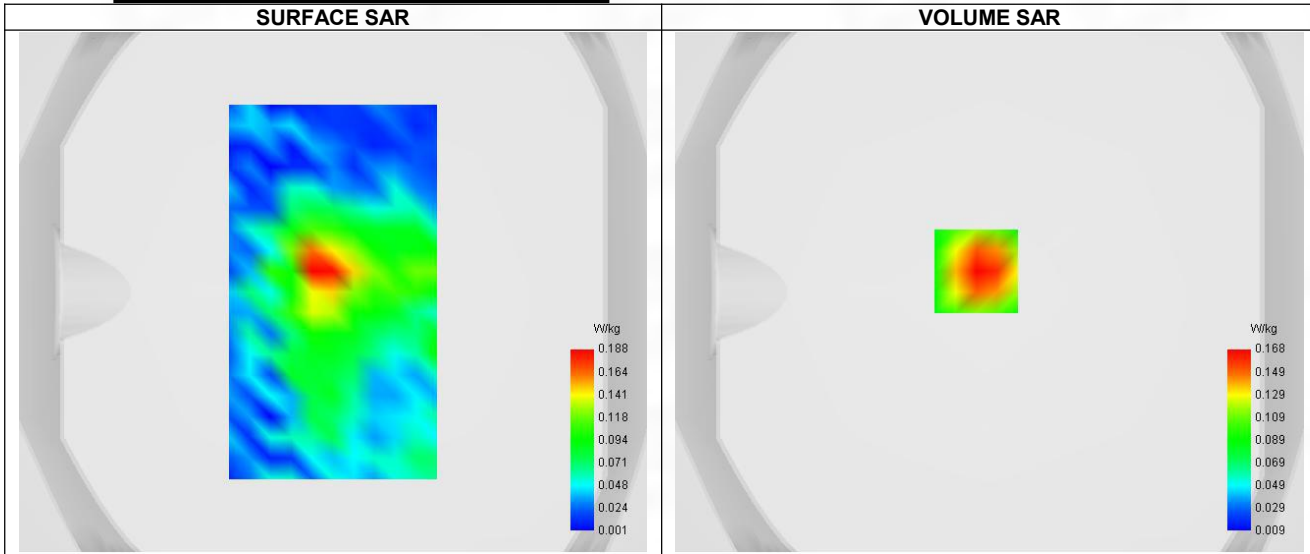


Maximum location: X=-5.00, Y=8.00 ; SAR Peak: 0.34 W/kg

**D. SAR 1g & 10g**


SAR 10g (W/Kg)	0.093
SAR 1g (W/Kg)	0.170
Variation (%)	-4.440
Horizontal validation criteria: minimum distance (mm)	8.162
Vertical validation criteria: SAR ratio M2/M1 (%)	40.48%

**E. Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.338	0.168	0.068	0.036	0.035

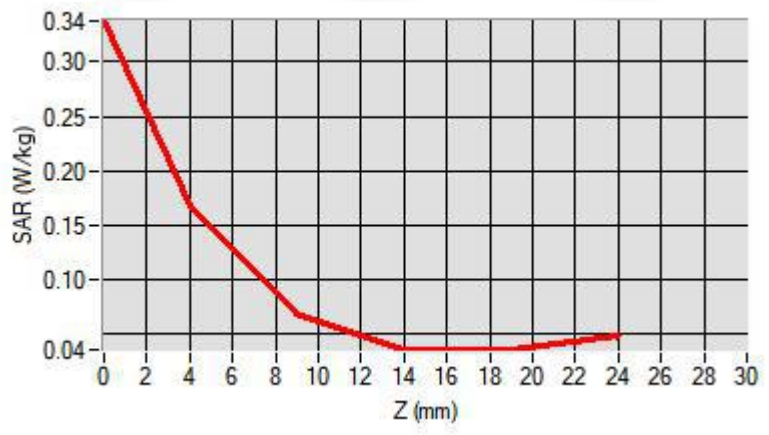

### F. 3D Image

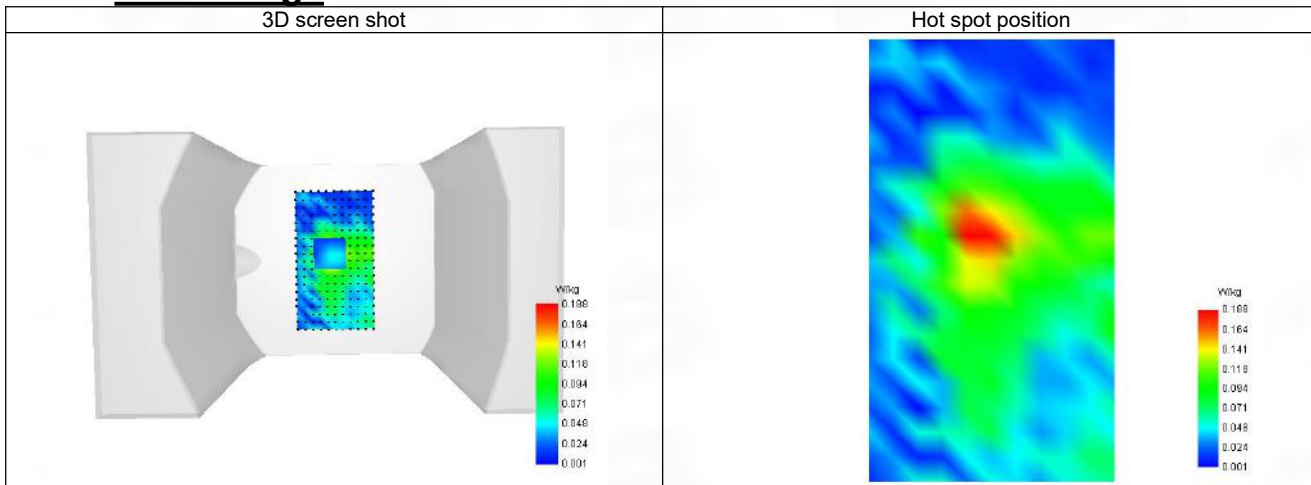

**27-Head with front position in dist. 0mm on Channel 48 in IEEE 802.11ac U-NII**

**SAR Measurement at IEEE 802.11ac U-NII (Cheek, Right)**

Date of measurement: 18/7/2024


**A. Experimental conditions.**

Probe	SN 04/22 EPGO365
ConvF	2.24
Area Scan	dx=8mm dy=8mm, Adaptive 1 max
Zoom Scan	7x7x12, dx=4mm dy=4mm dz=5mm, Complete
Phantom	Right head
Device Position	Cheek
Band	IEEE 802.11ac U-NII
Channels	Higher (48)
Signal	IEEE 802.11

**B. Permittivity**

Frequency (MHz)	5240.000
Relative permittivity (real part)	35.840
Relative permittivity (imaginary part)	16.264
Conductivity (S/m)	4.740

**C. SAR Surface and Volume**

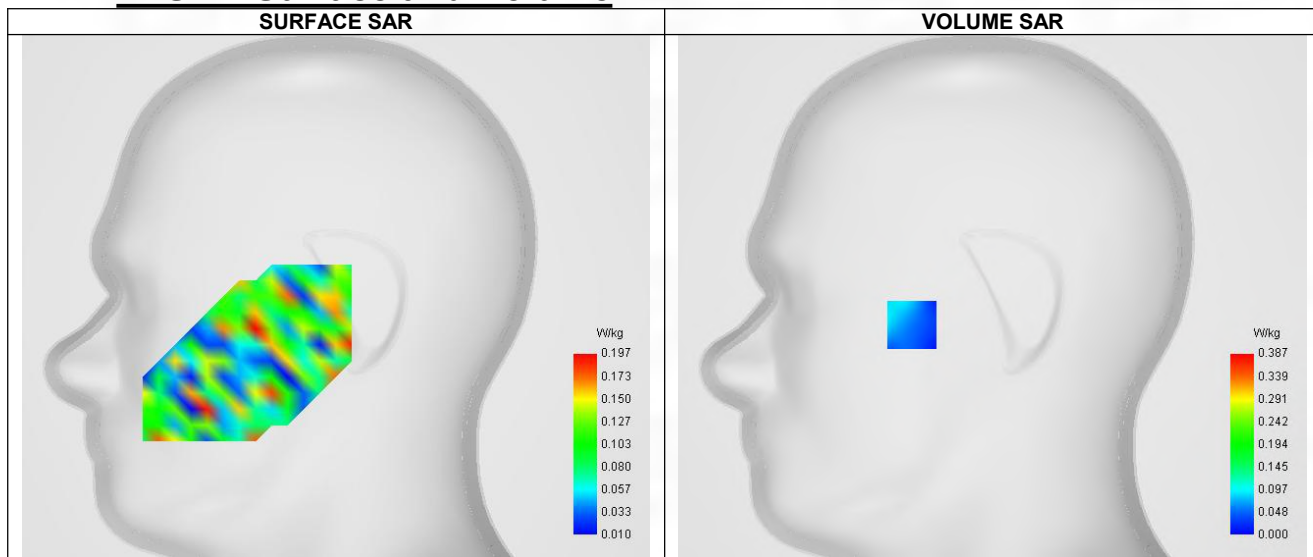


Maximum location: X=-40.00, Y=-14.00 ; SAR Peak: 0.49 W/kg

**D. SAR 1g & 10g**


SAR 10g (W/Kg)	0.124
SAR 1g (W/Kg)	0.166
Variation (%)	-3.480
Horizontal validation criteria: minimum distance (mm)	8.025
Vertical validation criteria: SAR ratio M2/M1 (%)	59.57%

**E. Z Axis Scan**

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00
SAR (W/Kg)	0.234	0.094	0.056	0.003	0.051	0.000	0.051	0.021	0.049

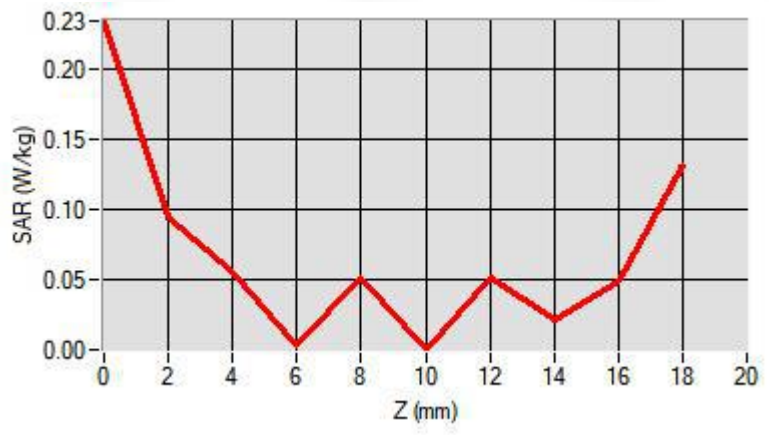

### F. 3D Image

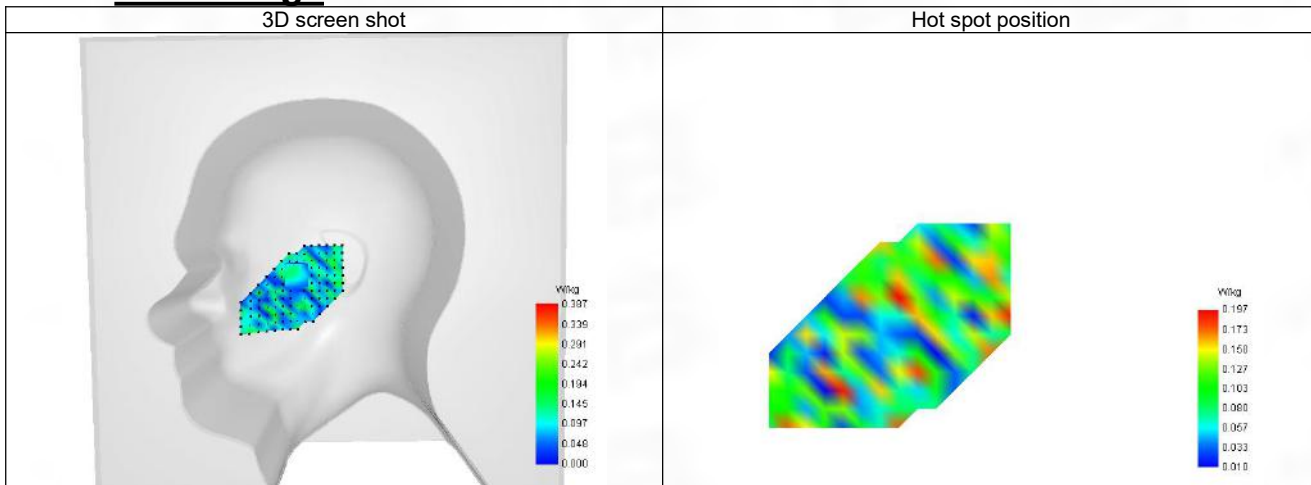

**28-Body with front position in dist. 10mm on Channel 48 in IEEE 802.11ac U-NII**

**SAR Measurement at IEEE 802.11ac U-NII (Body, Validation Plane)**

Date of measurement: 18/7/2024


**A. Experimental conditions.**

Probe	SN 04/22 EPGO365
ConvF	2.24
Area Scan	dx=8mm dy=8mm, Adaptive 1 max
Zoom Scan	7x7x12, dx=4mm dy=4mm dz=5mm, Complete
Phantom	Validation plane
Device Position	Body
Band	IEEE 802.11ac U-NII
Channels	Higher (48)
Signal	IEEE 802.11

**B. Permittivity**

Frequency (MHz)	5240.000
Relative permittivity (real part)	35.840
Relative permittivity (imaginary part)	16.264
Conductivity (S/m)	4.740

**C. SAR Surface and Volume**

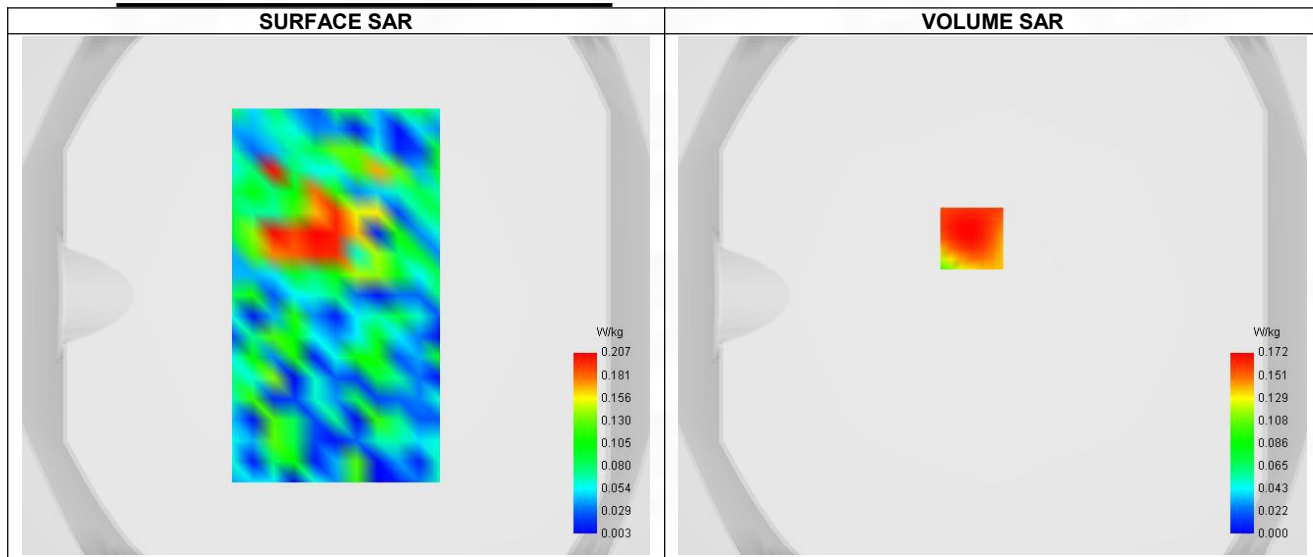


Maximum location: X=-8.00, Y=22.00 ; SAR Peak: 0.36 W/kg

**D. SAR 1g & 10g**


SAR 10g (W/Kg)	0.076
SAR 1g (W/Kg)	0.130
Variation (%)	-4.850
Horizontal validation criteria: minimum distance (mm)	8.592
Vertical validation criteria: SAR ratio M2/M1 (%)	56.40%

**E. Z Axis Scan**

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00
SAR (W/Kg)	0.287	0.172	0.097	0.064	0.039	0.032	0.027	0.027	0.030

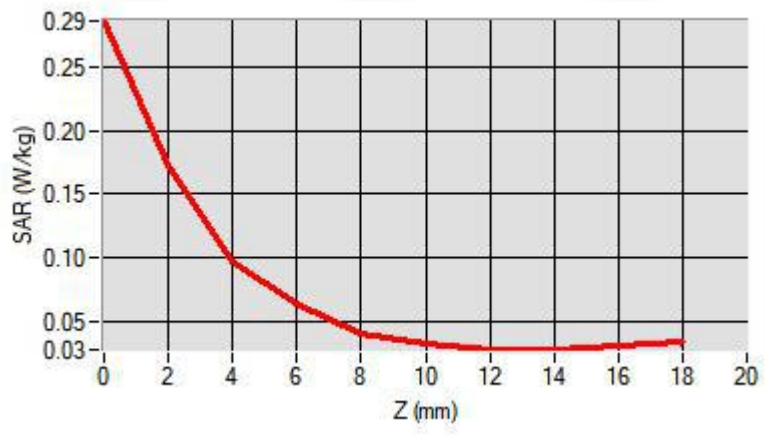

### F. 3D Image

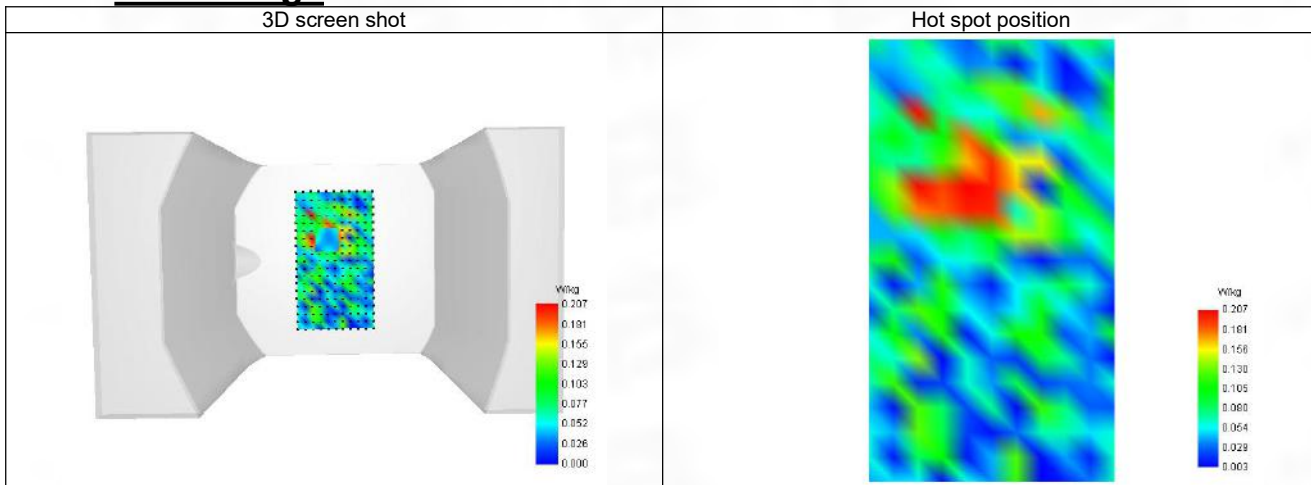

**29-Head with front position in dist. 0mm on Channel 149 in IEEE 802.11n U-NII**

**SAR Measurement at IEEE 802.11n U-NII (Cheek, Right)**

Date of measurement: 18/7/2024


**A. Experimental conditions.**

Probe	SN 04/22 EPGO365
ConvF	2.04
Area Scan	dx=8mm dy=8mm, Adaptive 1 max
Zoom Scan	7x7x12, dx=4mm dy=4mm dz=5mm, Complete
Phantom	Right head
Device Position	Cheek
Band	IEEE 802.11n U-NII
Channels	Lower (149)
Signal	IEEE 802.11

**B. Permittivity**

Frequency (MHz)	5745.000
Relative permittivity (real part)	35.235
Relative permittivity (imaginary part)	16.464
Conductivity (S/m)	5.255

**C. SAR Surface and Volume**

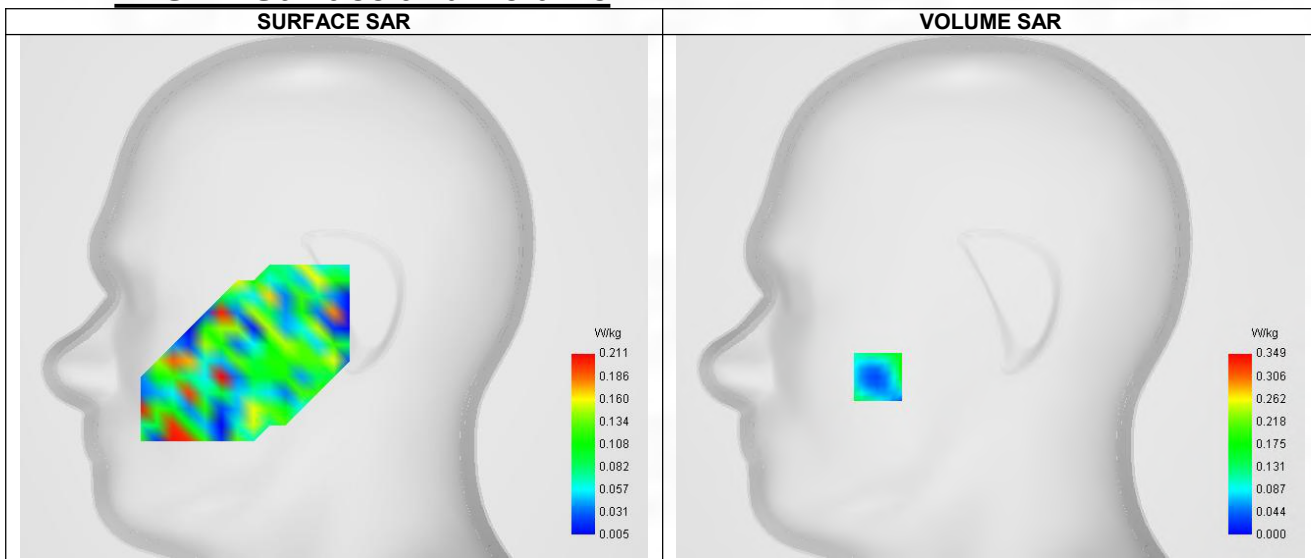


Maximum location: X=-56.00, Y=-40.00 ; SAR Peak: 0.91 W/kg

**D. SAR 1g & 10g**


SAR 10g (W/Kg)	0.132
SAR 1g (W/Kg)	0.246
Variation (%)	-4.900
Horizontal validation criteria: minimum distance (mm)	8.245
Vertical validation criteria: SAR ratio M2/M1 (%)	35.39%

**E. Z Axis Scan**

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00
SAR (W/Kg)	0.374	0.178	0.063	0.094	0.037	0.057	0.064	0.091	0.072

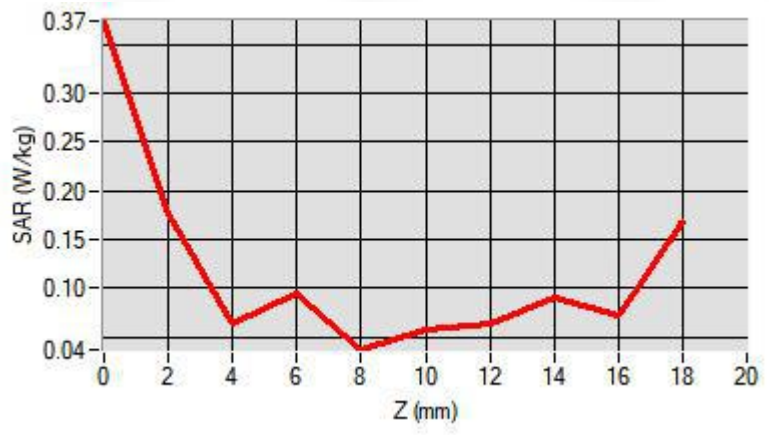

### F. 3D Image

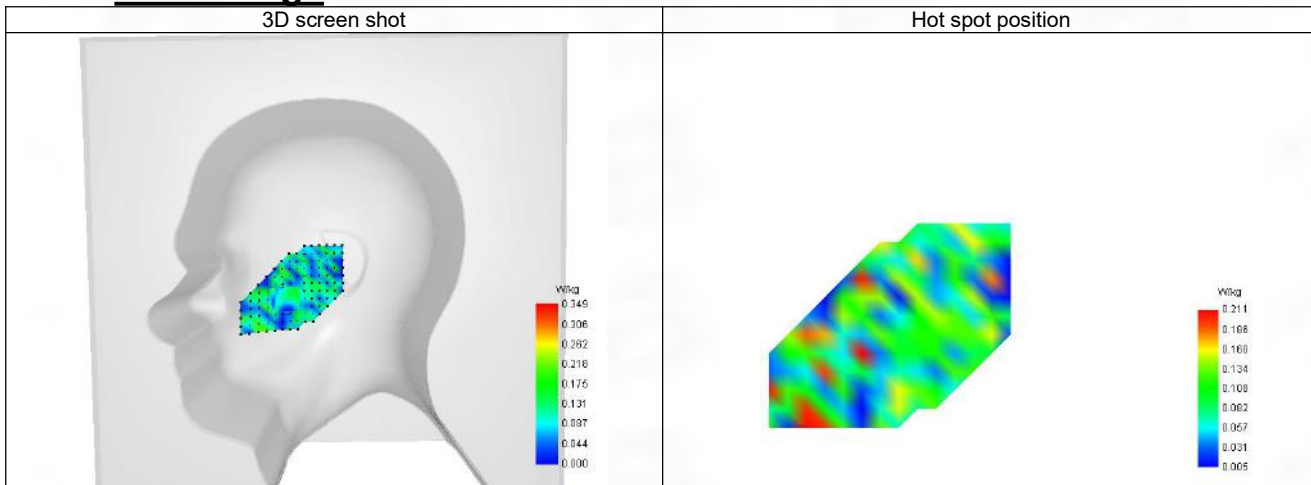



**30-Body with front position in dist. 10mm on Channel 149 in IEEE 802.11n U-NII**

**SAR Measurement at IEEE 802.11n U-NII (Body, Validation Plane)**

Date of measurement: 18/7/2024


**A. Experimental conditions.**

Probe	SN 04/22 EPGO365
ConvF	2.04
Area Scan	dx=8mm dy=8mm, Adaptive 1 max
Zoom Scan	7x7x12, dx=4mm dy=4mm dz=5mm, Complete
Phantom	Validation plane
Device Position	Body
Band	IEEE 802.11n U-NII
Channels	Lower (149)
Signal	IEEE 802.11

**B. Permittivity**

Frequency (MHz)	5745.000
Relative permittivity (real part)	35.235
Relative permittivity (imaginary part)	16.464
Conductivity (S/m)	5.255

**C. SAR Surface and Volume**

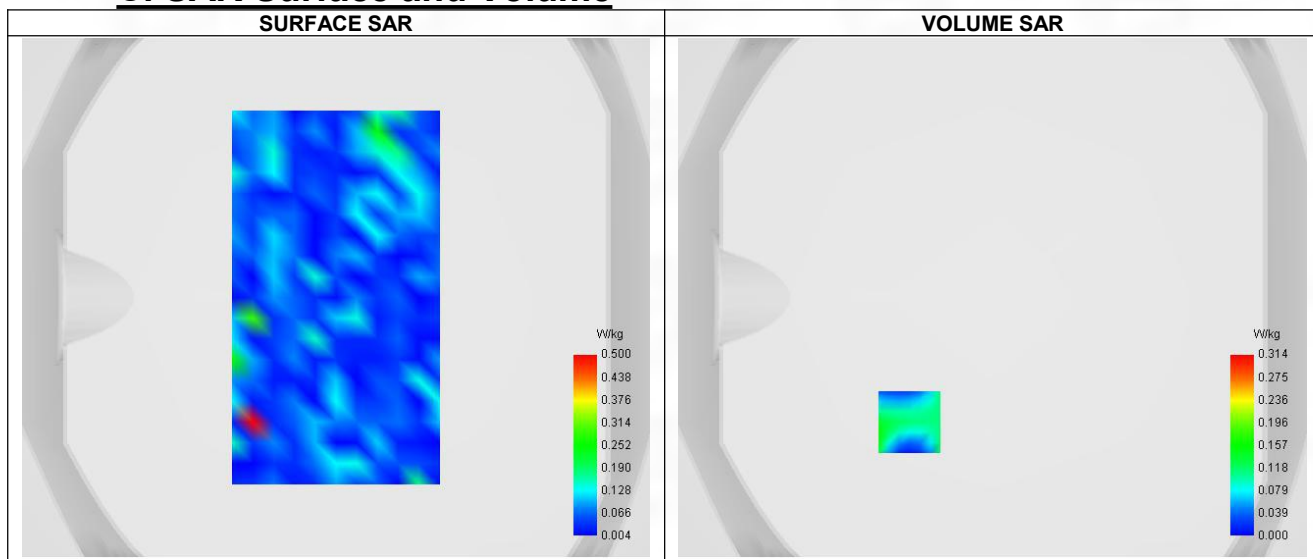


Maximum location: X=-32.00, Y=-48.00 ; SAR Peak: 0.61 W/kg

**D. SAR 1g & 10g**


SAR 10g (W/Kg)	0.084
SAR 1g (W/Kg)	0.133
Variation (%)	-2.940
Horizontal validation criteria: minimum distance (mm)	8.279
Vertical validation criteria: SAR ratio M2/M1 (%)	56.21%

**E. Z Axis Scan**

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00
SAR (W/Kg)	0.398	0.153	0.086	0.006	0.007	0.094	0.093	0.058	0.070

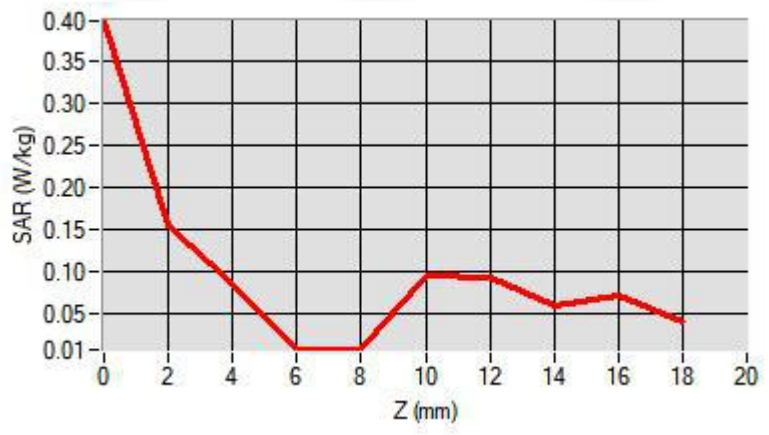


### F. 3D Image

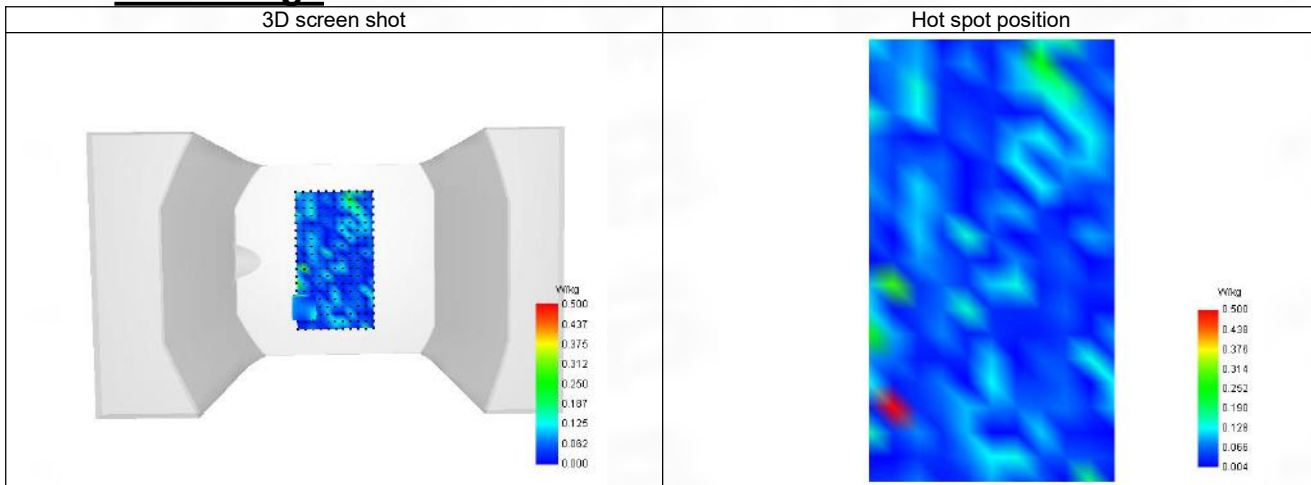


## ANNEX E SAR Test Setup Photos


Reference Photo: simulation liquid depth 15cm

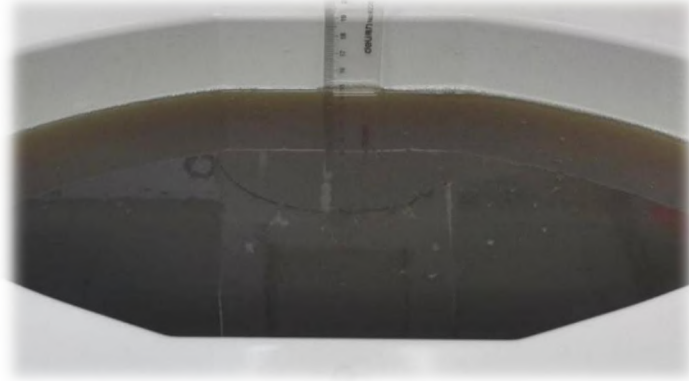


Reference Photos

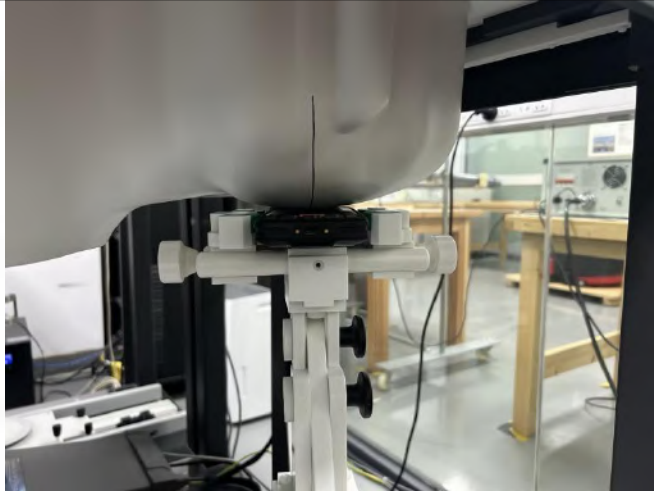


Left Head - Cheek

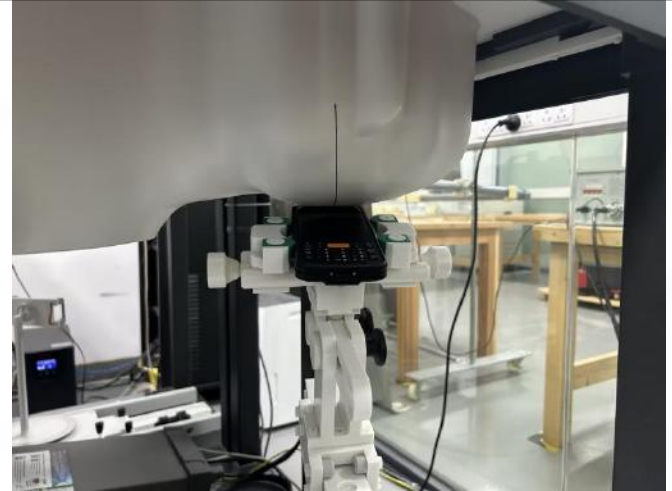


Left Head - Tilt

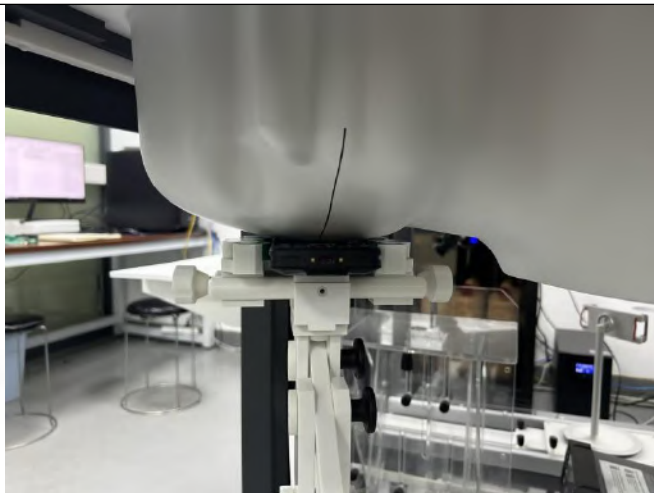

Right Head - Cheek

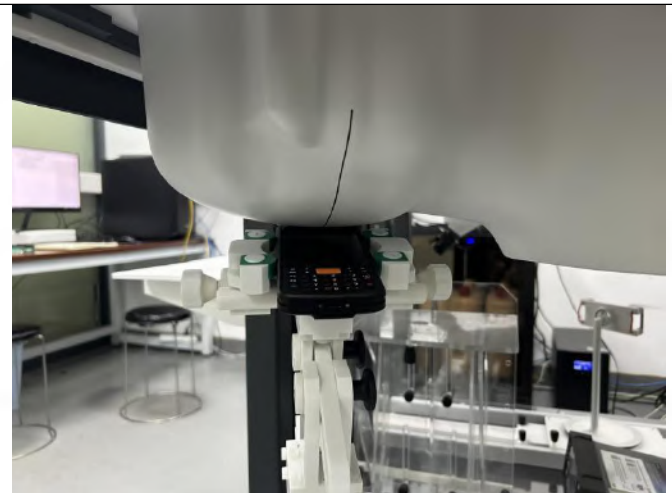

Right Head - Tilt

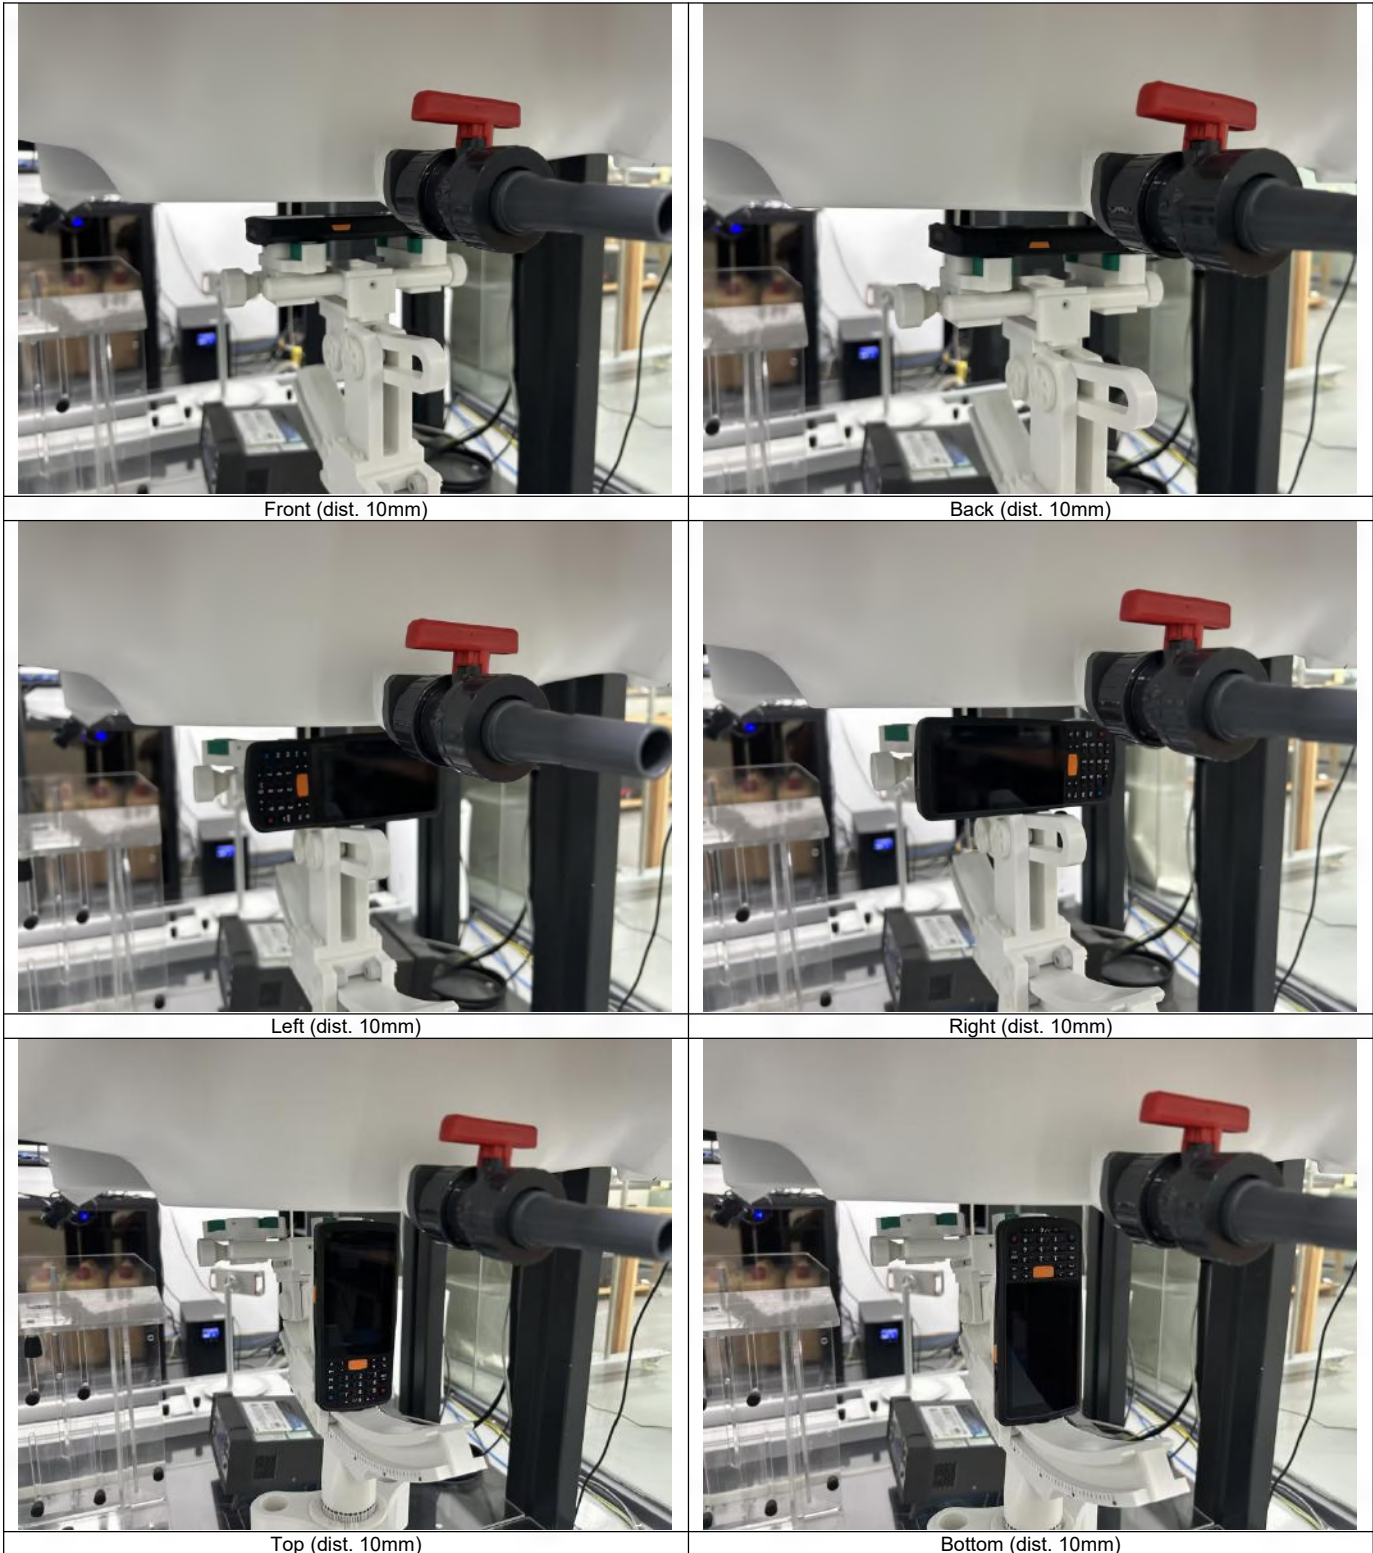

## ANNEX F EUT External and Internal Photos

Please refer to RF Report.

## ANNEX G Calibration Information

Please refer to the document "Calibration.pdf".



BTF Testing Lab (Shenzhen) Co., Ltd.

F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street,  
Bao'an District, Shenzhen, China

[www.btf-lab.com](http://www.btf-lab.com)

**--END OF REPORT--**