



Test report 2023-0314-EMC-TR-23-0223-V01

Designation:	CAP M2 17E/19/23/25T [WCS] F-AC-F1
Manufacturer:	Commscope
Serial No(s):	FICMBA2338001
ID No.	7856326-1010 Rev: 00
FCC ID	XS5-CAPM217192325
Test Specification(s):	ANSI 63.26:2015 FCC Rules and Regulations as listed in 47 CFR, Part 20 and Part 27:2023-10-13
Test Plan:	"Infoblatt_für_CAP M2 17E_19_21_25T_ID7856326-1010 " from customer.

Date of issue:	2024-01-31		Signature:
Version:	01	Technical Reviewer:	
Date of receipt EUT:	2023-10-13		
Performance date:	2023-11-20 to 2023-12-14	Report Reviewer:	



BNetzA-CAB-19/21-20



Deutsche
Akkreditierungsstelle
D-PL-12024-06-04

The test results relates only to the tested item. The sample has been provided by the client.

Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.

Bureau Veritas
Consumer Products Services Germany GmbH
www.bureauveritas.de/cps
Phone: +49 (0)40 – 740 41 – 0

Schwerin
Wilhelm-Hennemann-Str. 8, 19061 Schwerin
cps-schwerin@de.bureauveritas.com

Tuerkheim
Businesspark A96, 86842 Tuerkheim
cps-tuerkheim@de.bureauveritas.com

Managing Director: Sebastian Doose/Stefan Kischka

Hamburg
Oehleckerring 40, 22419 Hamburg
cps-hamburg@de.bureauveritas.com

Nuremberg
Thurn-und-Taxis-Str. 18, 90411 Nuremberg
cps-nuernberg@de.bureauveritas.com

Reg.No.: Schwerin HRB 3564



**BUREAU
VERITAS**

EMC Test Report No.: 23-0223

EMC tests on Andrew CAP M2 17E/19/23/25T [WCS 2300] F-AC-F1

Client: Commscope
Andrew Wireless System GmbH
Industriering 10
86675 Buchdorf
Germany

Test laboratory: Bureau Veritas Consumer Products Services Germany GmbH
Thurn-und-Taxis-Straße 18
D-90411 Nürnberg
Tel.: +49 40 74041 0

Test location: Bureau Veritas Consumer Products Services Germany GmbH
Thurn-und-Taxis-Straße 18
D-90411 Nürnberg

Laboratory accreditation no: DAKKS D-PL-12024-06-04
BNETZA-CAB-19/21-20

FCC Designation Number: DE0023
FCC Test Firm Registration: 366481

Versions management:

V 01.00 Initial release



Table of Contents

1 APPLIED STANDARDS AND TEST SUMMARY 4

1.1 CFR APPLIED STANDARDS 4

1.2 FCC REFERENCE TABLE 5

1.3 MEASUREMENT SUMMARY/SIGNATURES 6

2 ADMINISTRATIVE DATA10

2.1 TESTING LABORATORY10

2.2 APPLICANT DATA10

2.3 MANUFACTURER DATA10

3 TEST OBJECT DATA11

3.1 GENERAL EUT DESCRIPTION11

3.2 EUT MAIN COMPONENTS12

3.3 ANCILLARY EQUIPMENT12

3.4 AUXILIARY EQUIPMENT13

3.5 EUT SETUPS14

3.6 OPERATING MODES15

3.7 PRODUCT LABELLING17

4 TEST RESULTS18

4.1 EFFECTIVE RADIATED POWER, MEAN OUTPUT POWER AND ZONE ENHANCER
GAIN 18

4.2 PEAK TO AVERAGE RATIO28

4.3 OCCUPIED BANDWIDTH/INPUT-VERSUS-OUTPUT SPECTRUM34

4.4 CONDUCTED SPURIOUS EMISSIONS AT ANTENNA TERMINALS43

4.5 OUT-OF-BAND EMISSION LIMITS66

4.6 OUT-OF-BAND REJECTION81

4.7 FREQUENCY STABILITY83

4.8 FIELD STRENGTH OF SPURIOUS RADIATION84

5 TEST EQUIPMENT100

5.1 CONDUCTED EMISSIONS100

5.2 RADIATED EMISSIONS100

6 ANTENNA FACTORS, CABLE LOSS AND SAMPLE CALCULATIONS101

6.1 ANTENNA CHASE CBL 6111C (30 MHZ – 1 GHZ)101

6.2 ANTENNA ROHDE & SCHWARZ HL 025 (1 GHZ – 18 GHZ)102

6.3 ANTENNA ARA INC. MWH-1826-B (18 GHZ – 26.5 GHZ) PARTIALLY IN
CONJUNCTION WITH PRE-AMPLIFIER MITEQ JS43-1800-4000: THE USE OF THE
PRE-AMPLIFIER IS DEPENDENT FROM THE FIELD STRENGTH103

7 MEASUREMENT UNCERTAINTIES104

8 PHOTO REPORT105

ANNEX A: ACCREDITATION CERTIFICATE (FOR INFORMATION)106

ANNEX B: ADDITIONAL INFORMATION PROVIDED BY CLIENT107



EMC Test Report No.: 23-0223

EMC tests on Andrew CAP M2 17E/19/23/25T [WCS 2300] F-AC-F1

1 APPLIED STANDARDS AND TEST SUMMARY

1.1 CFR APPLIED STANDARDS

Type of Authorization

Certification for an Industrial Signal Booster.

Applicable FCC Rules

Prepared in accordance with the requirements of FCC Rules and Regulations as listed in 47 CFR Ch.1 Parts 2 and 20, 22 and 27. The following subparts are applicable to the results in this test report.

Part 2, Subpart J - Equipment Authorization Procedures, Certification

Part 20, Commercial Mobile Services

§ 20.21 Signal Boosters

Part 27; Miscellaneous Wireless Communications Services

Subpart C – Technical standards

§ 27.50 – Power and antenna height limits

§ 27.54 – Frequency stability

§ 27.53 – Emission

The tests were selected and performed with reference to:

- FCC Public Notice 935210 applying "Signal Boosters Basic Certification Requirements" 935210 D02, 2019-15-04.
- FCC Public Notice 935210 applying "Measurement guidance for industrial and non-consumer signal booster, repeater and amplifier devices" 935210 D05, 2019-04-03.
- FCC Public Notice 971168 applying "Measurement guidance for certification of licensed digital transmitters" 971168 D01, 2019-04-09.
- ANSI C63.26: 2015



Summary Test Results:

The EUT complies with all performed tests as listed in chapter 1.3 Measurement Summary/Signatures.

1.2 FCC REFERENCE TABLE

Measurement	FCC reference
Effective radiated power, mean output power and zone enhancer gain	§ 2.1046 § 27.50 KDB 935210 D05 v01r04: 3.5
Peak to Average Ratio	§ 27.50
Occupied bandwidth	§ 2.1049
Input-versus-output spectrum	KDB 935210 D05 v01r04: 3.4
Conducted spurious Emission at Antenna Terminal	§ 2.1051 § 27.53 KDB 935210 D05 v01r04: 3.6
Out-of-band emissions limits	§ 2.1051 § 27.53 KDB 935210 D05 v01r04: 3.6
Frequency stability	§ 2.1055 § 27.54
Field strength of spurious radiation	§ 2.1053 § 27.53
Out-of-band rejection	KDB 935210 D05 v01r04: 3.3
All measurements	ANSI 63.26



1.3 MEASUREMENT SUMMARY/SIGNATURES

47 CFR CHAPTER I FCC PART 27 Subpart C [Base Stations/Repeater]

§ 2.1046, § 27.50

Effective Radiated Power, mean output power and zone enhancer gain
The measurement was performed according to ANSI C63.26, KDB 935210 D05 v01r04: 3.5

Final Result

OP-Mode

Table with 2 columns: Test Description and Final Result. Rows include Frequency Band, Direction, Input Power, Signal Type and various AGC/Wideband/Narrowband/5G test results.

47 CFR CHAPTER I FCC PART 27 Subpart C [Base Stations/Repeater]

§ 27.50

Peak to Average Ratio
The measurement was performed according to ANSI C63.26

Final Result

Table with 2 columns: Test Description and Final Result. Rows include various AGC/Wideband/Narrowband/5G test results for Peak to Average Ratio.

47 CFR CHAPTER I FCC PART 27 Subpart C [Base Stations/Repeater]

§ 2.1049

Occupied Bandwidth/Input-versus-output Spectrum
The measurement was performed according to ANSI C63.26, KDB 935210 D05 v01r04: 3.4

Final Result

OP-Mode

Table with 2 columns: Test Description and Final Result. Rows include Frequency Band, Direction, Input Power, Signal Type and various AGC/Wideband/Narrowband/5G test results.



EMC Test Report No.: 23-0223

EMC tests on Andrew CAP M2 17E/19/23/25T [WCS 2300] F-AC-F1

47 CFR CHAPTER I FCC PART 27 Subpart C [Base
Stations/Repeater]

§ 2.1051, § 27.53

Conducted spurious emissions at antenna terminals
The measurement was performed according to ANSI C63.26

Final Result

OP-Mode

Frequency Band, Direction, Input Power, Signal Type

WCS 2300, low, RF downlink, Wideband	
WCS 2300, mid, RF downlink, Wideband	Passed
WCS 2300, high, RF downlink, Wideband	Passed
WCS 2300low, RF downlink, Narrowband	Passed
WCS 2300, mid, RF downlink, Narrowband	Passed
WCS 2300, high, RF downlink, Narrowband	Passed
WCS 2300, low, RF downlink, Wideband 5G	Passed
WCS 2300, mid, RF downlink, Wideband 5G	Passed
WCS 2300, high, RF downlink, Wideband 5G	Passed



EMC Test Report No.: 23-0223

EMC tests on Andrew CAP M2 17E/19/23/25T [WCS 2300] F-AC-F1

47 CFR CHAPTER I FCC PART 27 Subpart C [Base Stations/Repeater] §2.1051, § 27.53

Out-of-band emission limits

The measurement was performed according to ANSI C63.26, KDB 935210 D05 v01r04: 3.6

OP-Mode

Band Edge, Frequency Band, Number of signals, Direction, Input Power, Signal Type

Upper, Band 30 WCS 2300, 1, RF downlink, 0.3 dB < AGC, Wideband	Passed
Upper, Band 30 WCS 2300, 1, RF downlink, 3 dB > AGC, Wideband	Passed
Upper, Band 30 WCS 2300, 1, RF downlink, 0.3 dB < AGC, Wideband 5G	Passed
Upper, Band 30 WCS 2300, 1, RF downlink, 3 dB > AGC, Wideband 5G	Passed
Upper, Band 30 WCS 2300, 1, RF downlink, 0.3 dB < AGC, Narrowband	Passed
Upper, Band 30 WCS 2300, 1, RF downlink, 3 dB > AGC, Narrowband	Passed
Lower, Band 30 WCS 2300, 1, RF downlink, 0.3 dB < AGC, Wideband	Passed
Lower, Band 30 WCS 2300, 1, RF downlink, 3 dB > AGC, Wideband	Passed
Lower, Band 30 WCS 2300, 1, RF downlink, 0.3 dB < AGC, Wideband 5G	Passed
Lower, Band 30 WCS 2300, 1, RF downlink, 3 dB > AGC, Wideband 5G	Passed
Lower, Band 30 WCS 2300, 1, RF downlink, 0.3 dB < AGC, Narrowband	Passed
Lower, Band 30 WCS 2300, 1, RF downlink, 3 dB > AGC, Narrowband	Passed
Upper, Band 30 WCS 2300, 2, RF downlink, 0.3 dB < AGC, Wideband	Passed
Upper, Band 30 WCS 2300, 2, RF downlink, 3 dB > AGC, Wideband	Passed
Upper, Band 30 WCS 2300, 2, RF downlink, 0.3 dB < AGC, Narrowband	Passed
Upper, Band 30 WCS 2300, 2, RF downlink, 3 dB > AGC, Narrowband	Passed
Lower, Band 30 WCS 2300, 2, RF downlink, 0.3 dB < AGC, Wideband	Passed
Lower, Band 30 WCS 2300, 2, RF downlink, 3 dB > AGC, Wideband	Passed
Lower, Band 30 WCS 2300, 2, RF downlink, 0.3 dB < AGC, Narrowband	Passed
Lower, Band 30 WCS 2300, 2, RF downlink, 3 dB > AGC, Narrowband	Passed



EMC Test Report No.: 23-0223

EMC tests on Andrew CAP M2 17E/19/23/25T [WCS 2300] F-AC-F1

47 CFR CHAPTER I FCC PART 27 Subpart C [Base Stations/Repeater]

KDB 935210 D05 v01r04: 3.3

Out-of-band rejection

The measurement was performed according to ANSI C63.26; KDB 935210 D05 v01r04: 3.3

Final Result

OP-Mode

Frequency Band, Direction

Band 30 WCS 2300, RF downlink

Setup

Passed

47 CFR CHAPTER I FCC PART 27 Subpart C [Base Stations/Repeater]

§2.1055, §27.54

Frequency stability

Final Result

OP-Mode

Not applicable

Not applicable

47 CFR CHAPTER I FCC PART 27 Subpart C [Base Stations/Repeater]

§ 2.1053, § 27.53

Field strength of spurious radiation

The measurement was performed according to ANSI C63.26

Final Result

OP-Mode, one antenne in use

Frequency Band, Test Frequency, Direction

WCS 2300, RF downlink

Passed

OP-Mode, MIMO

Frequency Band, Test Frequency, Direction

WCS 2300, RF downlink

Passed

Report version control			
Version	Release date	Change Description	Version validity
Initial	2024-01-31	--	Valid



**BUREAU
VERITAS**

EMC Test Report No.: 23-0223

EMC tests on Andrew CAP M2 17E/19/23/25T [WCS 2300] F-AC-F1

2 ADMINISTRATIVE DATA

2.1 TESTING LABORATORY

Bureau Veritas Consumer Products Services

Germany GmbH

Thurn-und-Taxis-Straße 18

D-90411 Nürnberg

Tel.: +49 40 74041 0

Fax: +49 40 74041-2755

2.2 APPLICANT DATA

Company Name: Commscope
Andrew Wireless Systems GmbH

Address: Industriering 10
86675 Buchdorf
Germany

Contact Person: Mr. Jiri Cecka

2.3 MANUFACTURER DATA

Company Name: Please see applicant data.

Address: Please see applicant data.



EMC Test Report No.: 23-0223

EMC tests on Andrew CAP M2 17E/19/23/25T [WCS 2300] F-AC-F1



3 TEST OBJECT DATA

3.1 GENERAL EUT DESCRIPTION

Kind of Device product description	Cellular Repeater
Product name	Cellular Repeater
Type	CAP M2 17E/19/23/25T F-AC-F1
Declared EUT data by the supplier	
General Product Description	The EUT is an industrial signal booster supporting the following: Band 30 (WCS-2300): 2350 – 2360 MHz A RF operation is only supported for the downlink.
Booster Type	Industrial Signal Booster
Voltage Type	AC
Voltage Level	100 to 240 V
Maximum Output Donor Port [Uplink]	-
Nominal Output Server Port [Downlink]	32 dBm
Nominal Gain [Uplink]	-
Nominal Gain [Downlink]	37 dB

The main components of the EUT are listed and described in chapter 3.2 EUT Main components.



3.2 EUT MAIN COMPONENTS

Sample Parameter	Value
Serial Number	FICMBA2338001
HW Version	7856326-1010 Rev: 00
SW Version	V5.0.0.196
Comment	-----

NOTE: The short description is used to simplify the identification of the EUT in this test report.

3.3 ANCILLARY EQUIPMENT

For the purposes of this test report, ancillary equipment is defined as equipment which is used in conjunction with the EUT to provide operational and control features to the EUT. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Ancillary Equipment can influence the test results.

Device	Details (Manufacturer, Type Model, OUT Code)	Description
-	-	-



3.4 AUXILIARY EQUIPMENT

For the purposes of this test report, auxiliary equipment is defined as equipment which is used temporarily to enable operational and control features especially used for the tests of the EUT which is not used during normal operation or equipment that is used during the tests in combination with the EUT but is not subject of this test report. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Auxiliary Equipment can influence the test results.

Device	Details (Manufacturer, Type, S/N)	Description
AUX1	Commscope, ION-E PSU Shelf AC, DC18596	Power supply rack
	GE Power Electronisc Inc., CAR1212FPBC-Z, DC17936	Power plug-in module
AUX2	Commscope, ION-E WCS-2, SZAEA11819A0005	Module rack
	Commscope, ION-E OPT, SZBEAD2012A0115	Optical plug-in module
	Commscope, RFD HB, SZBEAQ2140A0006	RF card plug-in module
	Commscope, RFD HB, SZBEAG2210A0008	RF card plug-in module
	Commscope, ION-E RFD, SZBEAG1825A0018	RF card plug-in module
	Commscope, ION-E RFD, SZBEAP2103A0457	RF card plug-in module



3.5 EUT SETUPS

This chapter describes the combination of EUTs and equipment used for testing. The rationale for selecting the EUTs, ancillary and auxiliary equipment and interconnecting cables, is to test a representative configuration meeting the requirements of the referenced standards.

Setup	Combination of EUTs	Description and Rationale
	,	Setup for all tests



3.6 OPERATING MODES

This chapter describes the operating modes of the EUT used for testing.

3.6.1 TEST CHANNELS

Band	Direction	Lower Frequency Band Edge [MHz]	Upper Frequency Band Edge [MHz]	Center Frequency [MHz]	Port
30, WCS 2300	Downlink	2350.00	2360.00	2355.00	Donor

3.6.2 DEFINITION OF USED FREQUENCY BANDS

Narrowband: representation by a GSM signal

Wideband: representation by an AWGN signal with 4.1 MHz

Wideband 5G: representation by an AWGN signal with 9.4 MHz

3.6.3 AUTOMATIC GAIN CONTROL LEVEL

AGC Levels							
Band	Direction	Signal Type	AGC Start Pin [dBm]	AGC Start Pin -0.3 dB [dBm]	AGC Start Pin +3 dB [dBm]	Frequency [MHz]	Frequency
30	Downlink	Narrowband	-4.0	-4.3	-1.3	2356.0	Mid
30	Downlink	Wideband	-4.2	-4.5	-1.5	2355.0	
30	Downlink	Wideband 5G	-4.3	-4.6	-1.6	2355.0	
30	Downlink	Narrowband	-6.0	-6.3	-3.0	2350.2	Low
30	Downlink	Wideband	-4.0	-4.3	-1.0	2357.5	
30	Downlink	Wideband 5G	-4.3	-4.6	-1.6	2355.0	
30	Downlink	Narrowband	-4.2	-4.5	-1.2	2359.8	High
30	Downlink	Wideband	-4.2	-4.5	-1.2	2357.5	
30	Downlink	Wideband 5G	-4.7	-5.0	-2.0	2355.0	
30	Downlink	Narrowband	-4.4	-4.8	-1.4	2357.6	Max.Power
30	Downlink	Wideband	-4.2	-4.5	-1.2	2357.5	
30	Downlink	Wideband 5G	-4.3	-4.6	-1.6	2355.0	

Remark:

If the measured frequency f_0 for the max power has a too low distance to the band edges, because in the tests modulated signals must be used: The next possible frequency to the according band edge is used.

For example for minimum distances to the band edges:

GSM signal (narrowband): 0.2 MHz

AWGN signal (wideband): 2.5 MHz

AWGN signal (wideband 5G): Here only measurements at the mid frequency are possible, because the signal band has the same bandwidth as the used channel.



EMC Test Report No.: 23-0223

EMC tests on Andrew CAP M2 17E/19/23/25T [WCS 2300] F-AC-F1

3.6.4 REMARKS TO THE MEASUREMENTS

Cause of an inappropriate control mode in the transmission of the narrowband signal (GSM signal) at f_{mid} , f_{mid} is increased by 1 MHz, Hereby the abbreviations are:

f_{mid} for wideband signals (AWGN signals)

f_{mid+1} for narrowband signals (GSM signals)

In the real use of the repeater narrowband signals aren't used.

3.7 PRODUCT LABELLING

3.7.1 FCC ID LABEL

Please refer to the documentation of the applicant.

3.7.2 LOCATION OF THE LABEL ON THE EUT

Please refer to the documentation of the applicant.

EMC Test Report No.: 23-0223

EMC tests on Andrew CAP M2 17E/19/23/25T [WCS 2300] F-AC-F1

4 TEST RESULTS

4.1 EFFECTIVE RADIATED POWER, MEAN OUTPUT POWER AND ZONE ENHANCER GAIN

Standard FCC Part 27, §27.50

The test was performed according to:

ANSI C63.26, KDB 935210 D05 v01r04: 3.5

Test date: 2023-11-20


Environmental conditions: 23 °C ± 5 K; 40 % r. F. ± 20 % r. F.

Test engineer: Thomas Hufnagel

4.1.1 TEST DESCRIPTION

This test case is intended to demonstrate compliance to the signal booster power and gain limits and requirements for industrial signal boosters.

The EUT was connected to the test setup according to the following diagram:

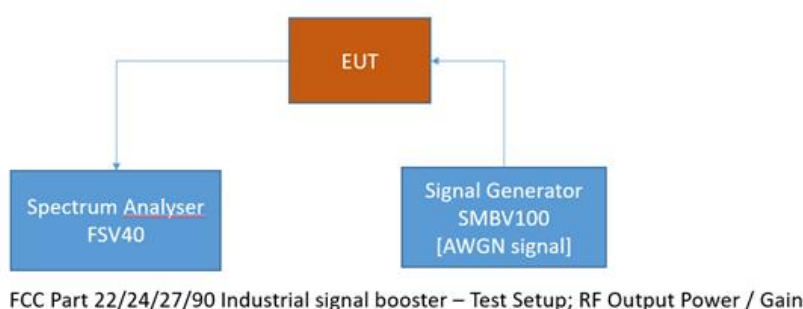

The attenuation of the measuring and stimulus path are known for each measured frequency and are considered.

The Spectrum Analyzer settings can be directly found in the measurement diagrams.



4.1.2 TEST REQUIREMENTS/LIMITS: ABSTRACTS FROM STANDARDS

Part 27; Miscellaneous Wireless Communication Services

Subpart C – Technical standards

§ 27.50

Abstract § 27.50 from FCC:

(a) The following power limits and related requirements apply to stations transmitting in the 2305-2320 MHz band or the 2345-2360 MHz band.

(1) Base and fixed stations. (i) For base and fixed stations transmitting in the 2305-2315 MHz band or the 2350-2360 MHz band:

(A) The average equivalent isotropically radiated power (EIRP) must not exceed 2,000 watts within any 5 megahertz of authorized bandwidth and must not exceed 400 watts within any 1 megahertz of authorized bandwidth.

**EMC Test Report No.: 23-0223**

EMC tests on Andrew CAP M2 17E/19/23/25T [WCS 2300] F-AC-F1



4.1.3 TEST PROTOCOL

Band 30 WCS 2300, downlink,							
Signal Type	Input Power	Frequency [MHz]	Input Power [dBm]	Maximum Average Output Power [dBm]	Limit Average Output Power [dBm]	Margin to Limit [dB]	Gain [dB]
Wideband	0.3 dB < AGC	2357.5	-5.0	31.9	63.0	31.1	36.8
Wideband	3 dB > AGC	2357.5	-1.6	31.8	63.0	31.2	33.5
Narrowband	0.3 dB < AGC	2357.6	-4.8	31.7	56.0	24.3	36.5
Narrowband	3 dB > AGC	2357.6	-1.4	31.7	56.0	24.3	33.2
Wideband 5G	0.3 dB < AGC	2355.0	-4.7	31.8	63.0	31.2	36.4
Wideband 5G	3 dB > AGC	2355.0	-1.4	31.8	63.0	31.2	33.2

Remark: Please see next sub-clause for the measurement plot.



EMC Test Report No.: 23-0223

EMC tests on Andrew CAP M2 17E/19/23/25T [WCS 2300] F-AC-F1

Maximum output power at the worst case consideration

The highest power level in the tables above is

$p_{\text{highest}} = 31.9 \text{ dBm}$ at the channel which has the most output power of all channels.

Hereby at an antenna gain of $G_{\text{dB}} = 15 \text{ dBi}$ the highest effective radiated output power EIRP $p_{\text{EIRP 1CH}}$ of one channel is:

$$p_{\text{EIRP 1CH}} = p_{\text{highest}} + G_{\text{dB}}$$

This results in:

$$p_{\text{EIRP 1CH}} = 31.9 \text{ dBm} + 15 \text{ dB} = 46.9 \text{ dBm}$$

The equivalent power P is according the given formula:

$$P_{\text{EIRP 1CH}} =$$

$$P_{\text{EIRP 1CH}} [W] = 10 \text{EXP}(p_{\text{EIRP 1CH}} [dBm] / 10) * 0.001 [W]$$

This results in:

$$P_{\text{EIRP 1CH}} [W] = 10 \text{EXP}(46.9 [dBm] / 10) * 0.001 [W] = 49.0 \text{ W}$$

Supposed all four antenna ports are working together in MIMO operation the worst case of the highest output power $p_{\text{EIRP 2CH}}$ is:

$$p_{\text{EIRP 2CH}} = 2 * p_{\text{EIRP 1CH}}$$

This results in:

$$p_{\text{EIRP 4CH}} = 2 * 49.9 \text{ W} = 98.0 \text{ W}$$

Final result of this consideration:

$$p_{\text{EIRP 4CH}} = 98.0 \text{ W} < 2000 \text{ W}, \text{ hereby } 2000 \text{ W} \text{ is the highest allowed limit in this band.}$$

The DUT doesn't exceed the limit.




EMC Test Report No.: 23-0223


EMC tests on Andrew CAP M2 17E/19/23/25T [WCS 2300] F-AC-F1

4.1.4 MEASUREMENT PLOT

Band: .WCS 2300; ANT 2; Frequency: 2.3575 GHz; Band Edge: f0; Mod: AWGN; Input Power
0.3 dB < AGC

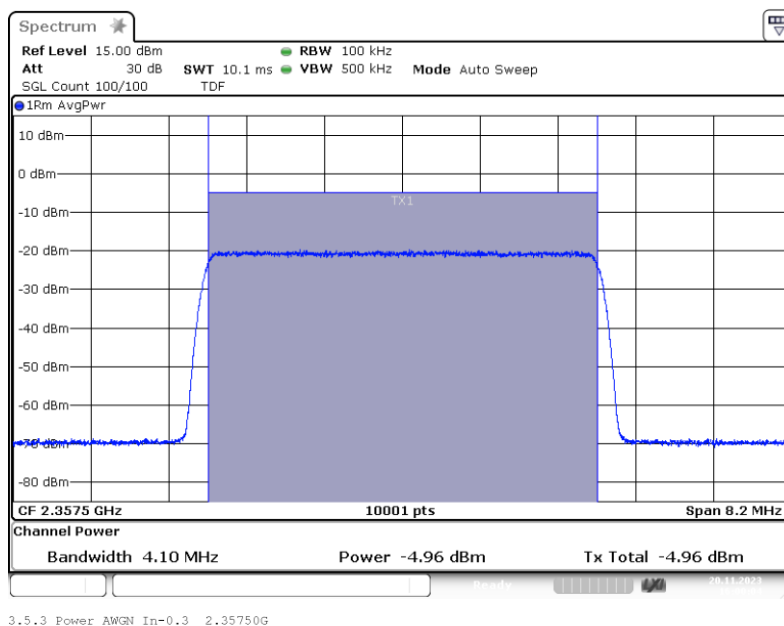

Band: .WCS 2300; ANT 2; Frequency: 2.3575 GHz; Band Edge: f0; Mod: AWGN; Output Power
0.3 dB < AGC

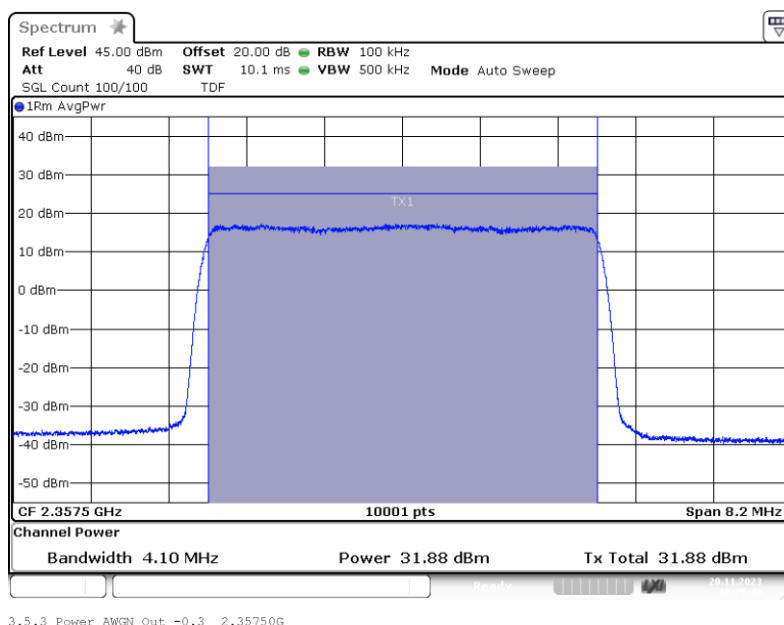




**BUREAU
VERITAS**


EMC Test Report No.: 23-0223

EMC tests on Andrew CAP M2 17E/19/23/25T [WCS 2300] F-AC-F1

Band: .WCS 2300; ANT 2; Frequency: 2.3575 GHz; Band Edge: f0; Mod: AWGN; Input Power
3 dB > AGC

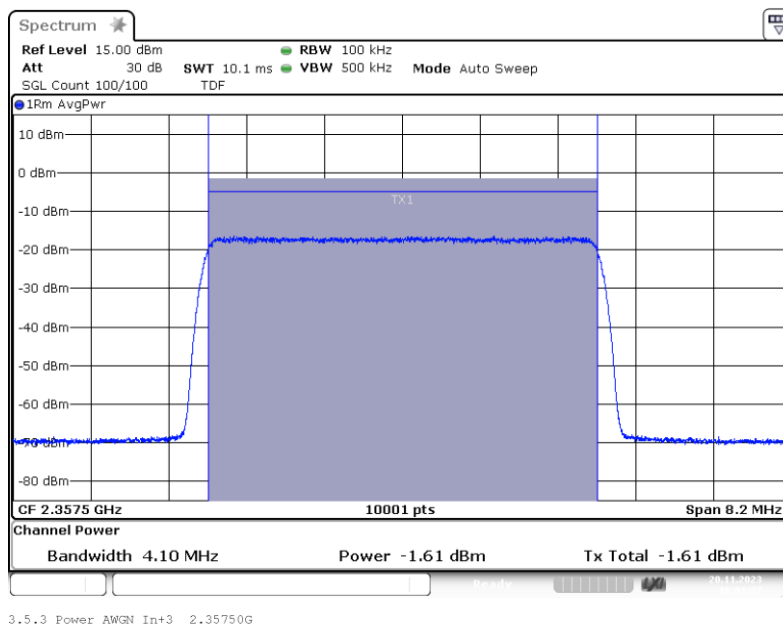

Band: .WCS 2300; ANT 2; Frequency: 2.3575 GHz; Band Edge: f0; Mod: AWGN; Output Power
3 dB > AGC

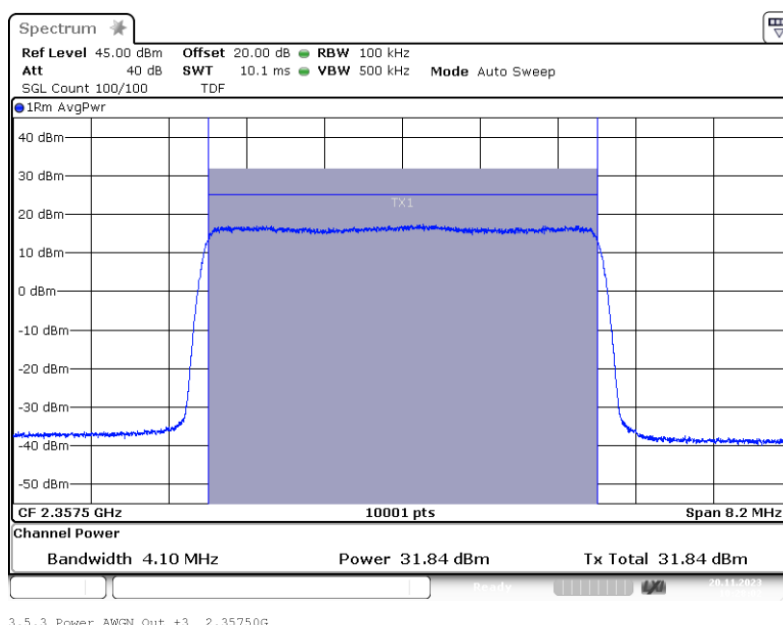





EMC Test Report No.: 23-0223

EMC tests on Andrew CAP M2 17E/19/23/25T [WCS 2300] F-AC-F1

Band: .WCS 2300; ANT 2; Frequency: 2.3576 GHz; Band Edge: f0; Mod: GSM; Input Power
0.3 dB < AGC

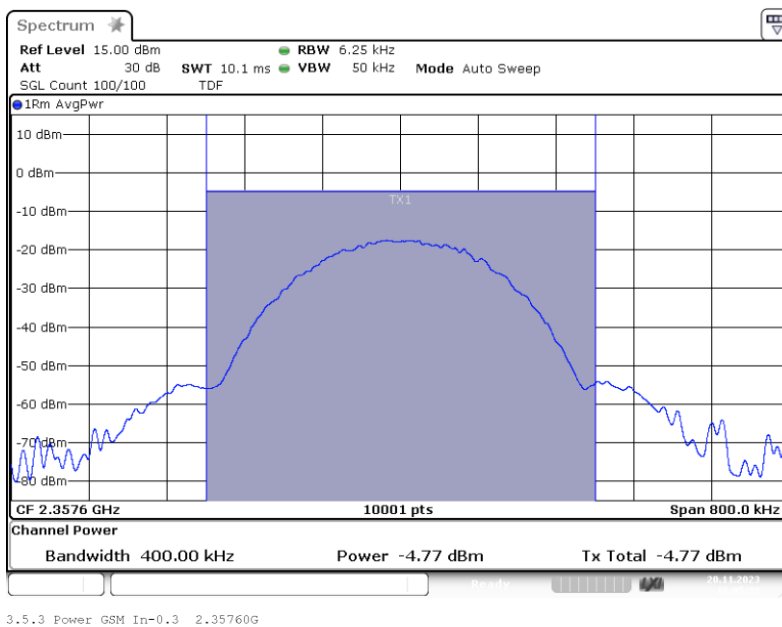

Band: .WCS 2300; ANT 2; Frequency: 2.3576 GHz; Band Edge: f0; Mod: GSM; Output Power
0.3 dB < AGC

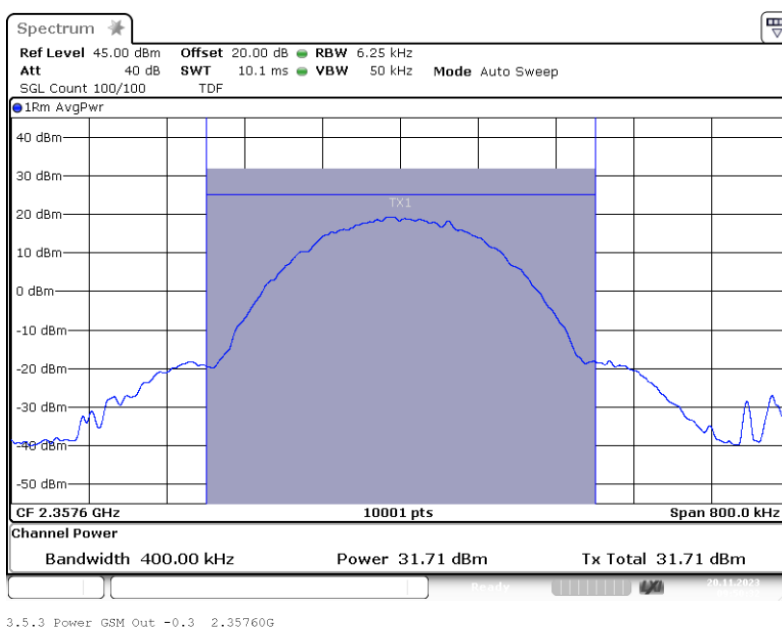





EMC Test Report No.: 23-0223

EMC tests on Andrew CAP M2 17E/19/23/25T [WCS 2300] F-AC-F1

Band: .WCS 2300; ANT 2; Frequency: 2.3576 GHz; Band Edge: f0; Mod: GSM; Input Power 3 dB > AGC

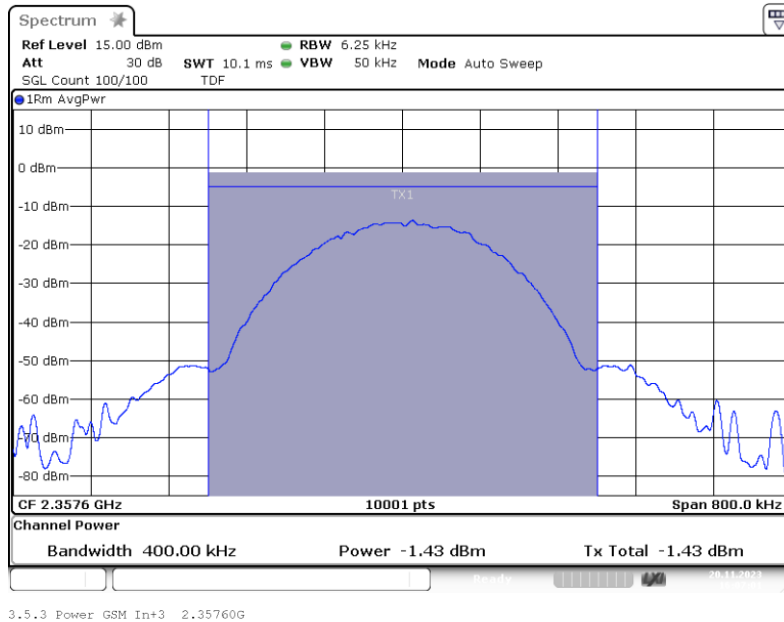

Band: .WCS 2300; ANT 2; Frequency: 2.3576 GHz; Band Edge: f0; Mod: GSM; Output Power 3 dB > AGC

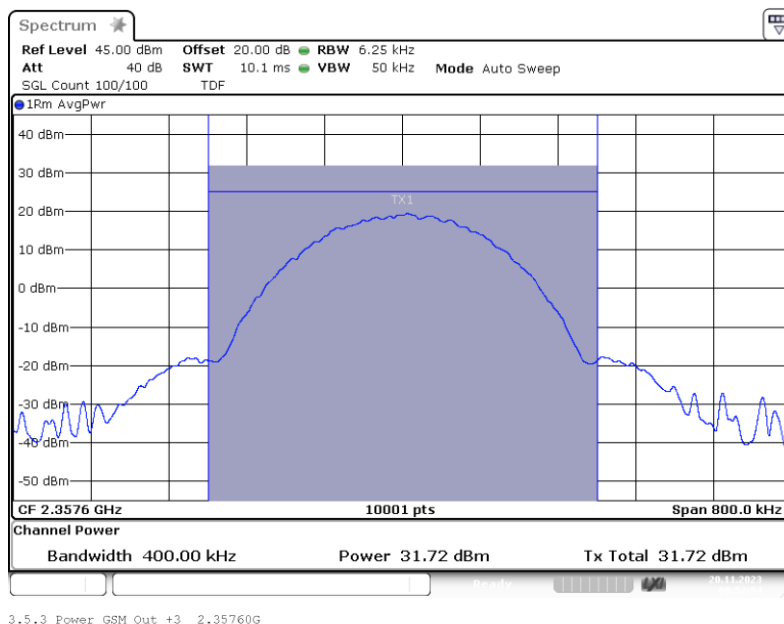





EMC Test Report No.: 23-0223

EMC tests on Andrew CAP M2 17E/19/23/25T [WCS 2300] F-AC-F1

Band: .WCS 2300; ANT 2; Frequency: 2.3550 GHz; Band Edge: mid; Mod: AWGN 10M; Input Power 0.3 dB < AGC

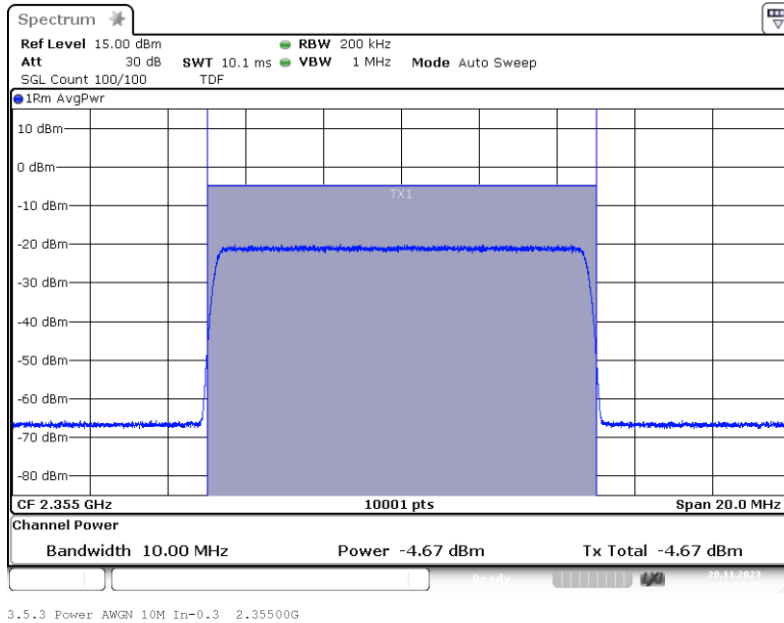

Band: .WCS 2300; ANT 2; Frequency: 2.3550 GHz; Band Edge: mid; Mod: AWGN 10M; Output Power 0.3 dB < AGC

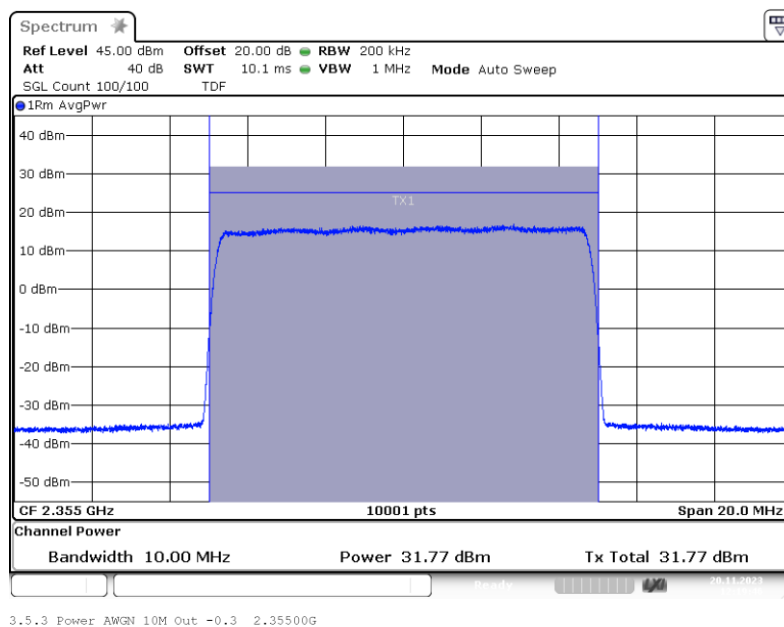





EMC Test Report No.: 23-0223

EMC tests on Andrew CAP M2 17E/19/23/25T [WCS 2300] F-AC-F1

Band: .WCS 2300; ANT 2; Frequency: 2.3550 GHz; Band Edge: mid; Mod: AWGN 10M; Input Power 3 dB > AGC

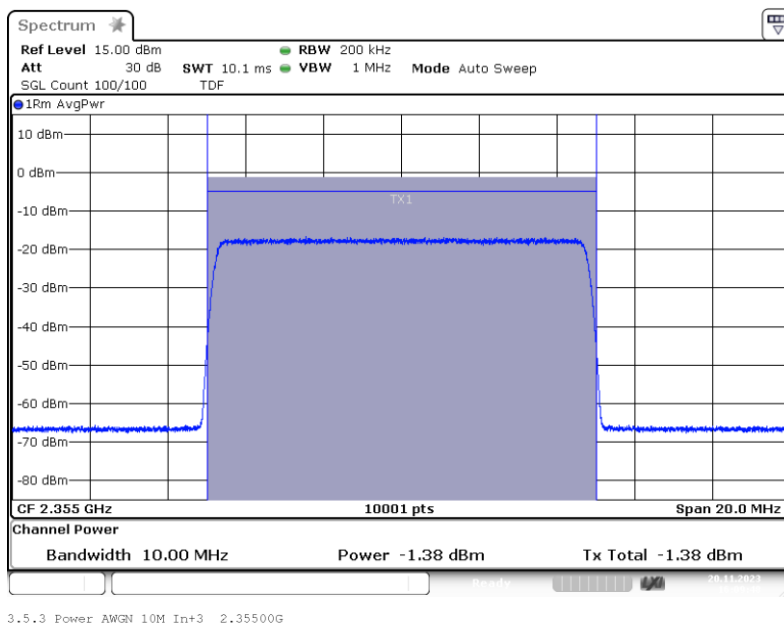

Band: .WCS 2300; ANT 2; Frequency: 2.3550 GHz; Band Edge: mid; Mod: AWGN 10M; Output Power 3 dB > AGC

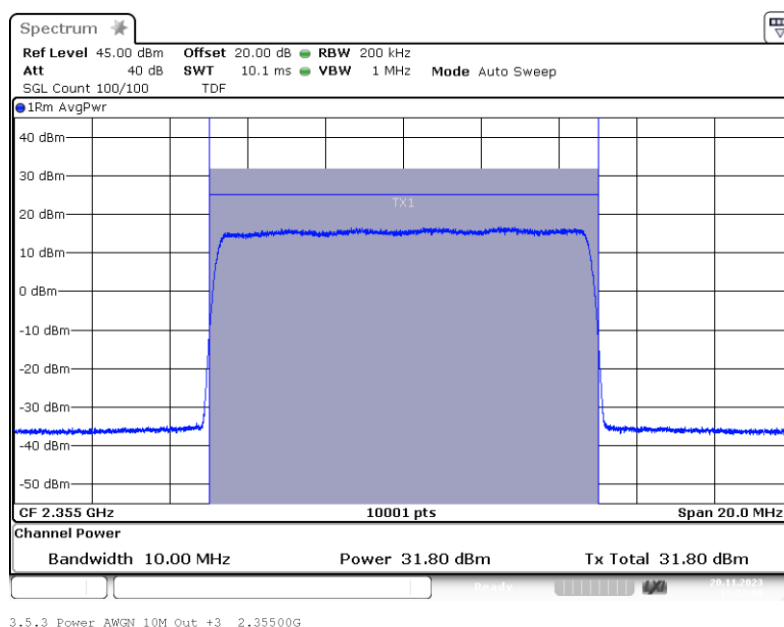

4.1.5 TEST EQUIPMENT USED

- Conducted



EMC Test Report No.: 23-0223

EMC tests on Andrew CAP M2 17E/19/23/25T [WCS 2300] F-AC-F1

4.2 PEAK TO AVERAGE RATIO

Standard FCC PART 27, § 27.50

The test was performed according to:

ANSI C63.26

Test date: 2023-11-20


Environmental conditions: 23 °C ± 5 K; 40 % r. F. ± 20 % r. F.

Test engineer: Thomas Hufnagel

4.2.1 TEST DESCRIPTION

This test case is intended to demonstrate compliance to the signal booster power and gain limits and requirements for industrial signal booster.

The EUT was connected to the test setup according to the following diagram:

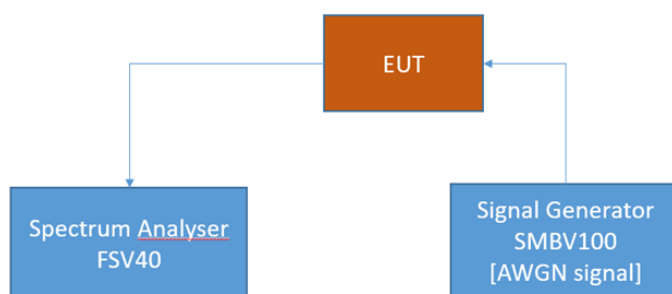

FCC Part 22/24/27/90 Industrial signal booster – Test Setup; RF Output Power / Gain

The attenuation of the measuring and stimulus path are known for each measured frequency and are considered.

The Spectrum Analyzer settings can be directly found in the measurement diagrams.



4.2.2 TEST REQUIREMENTS/LIMITS

Part 27; Miscellaneous Wireless Communication Services

Subpart C – Technical standards

§ 27.50

Abstract § 27.50 from FCC:

(a) The following power limits and related requirements apply to stations transmitting in the 2305-2320 MHz band or the 2345-2360 MHz band.

(B) The peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB. The PAPR measurements should be made using either an instrument with complementary cumulative distribution function (CCDF) capabilities to determine that PAPR will not exceed 13 dB for more than 0.1 percent of the time or other Commission approved procedure. The measurement must be performed using a signal corresponding to the highest PAPR expected during periods of continuous transmission.



EMC Test Report No.: 23-0223

EMC tests on Andrew CAP M2 17E/19/23/25T [WCS 2300] F-AC-F1

4.2.3 TEST PROTOCOL

Band 30 WCS 2300, downlink						
Signal Type	Input Power	Frequency [MHz]	Input Power [dBm]	PAPR [dB]	Limit PAPR [dB]	Margin to Fictive Limit [dB]
Wideband	0.3 dB < AGC	2357.5	-5.0	8.4	13.0	4.6
Wideband	3 dB > AGC	2357.5	-1.6	8.4	13.0	4.7
Narrowband	0.3 dB < AGC	2357.6	-4.8	0.1	13.0	12.9
Narrowband	3 dB > AGC	2357.6	-1.4	0.1	13.0	12.9
Wideband 5G	0.3 dB < AGC	2355.0	-4.7	8.4	13.0	4.6
Wideband 5G	3 dB > AGC	2355.0	-1.4	8.4	13.0	4.6

Remark: Please see next sub-clause for the measurement plot.




EMC Test Report No.: 23-0223

EMC tests on Andrew CAP M2 17E/19/23/25T [WCS 2300] F-AC-F1


4.2.4 MEASUREMENT PLOT (SHOWING VALUE)

Band: .WCS 2300; ANT 2; Frequency: 2.3575 GHz; Band Edge: f0; Mod: AWGN; PAPR 0.3 dB < AGC

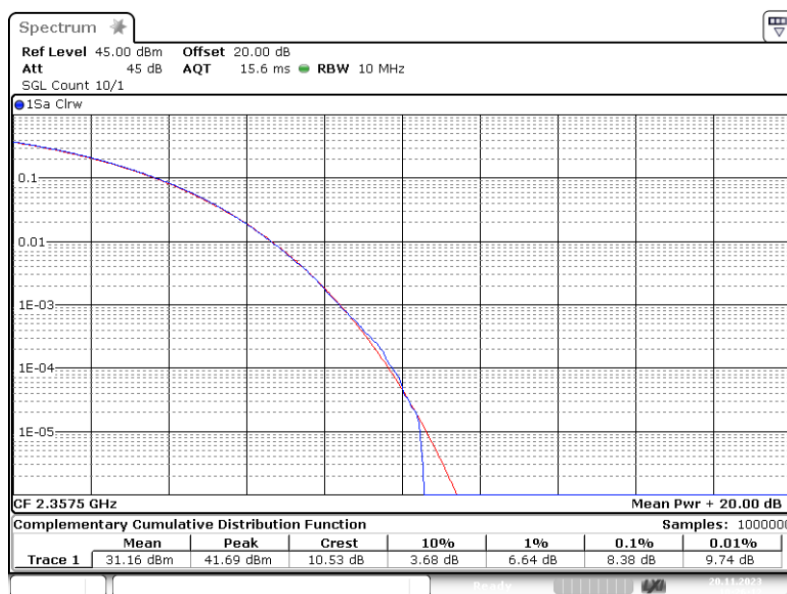

4.0 PAPR AWGN Out -0.3 2.358G

Band: .WCS 2300; ANT 2; Frequency: 2.3575 GHz; Band Edge: f0; Mod: AWGN; PAPR 3 dB > AGC

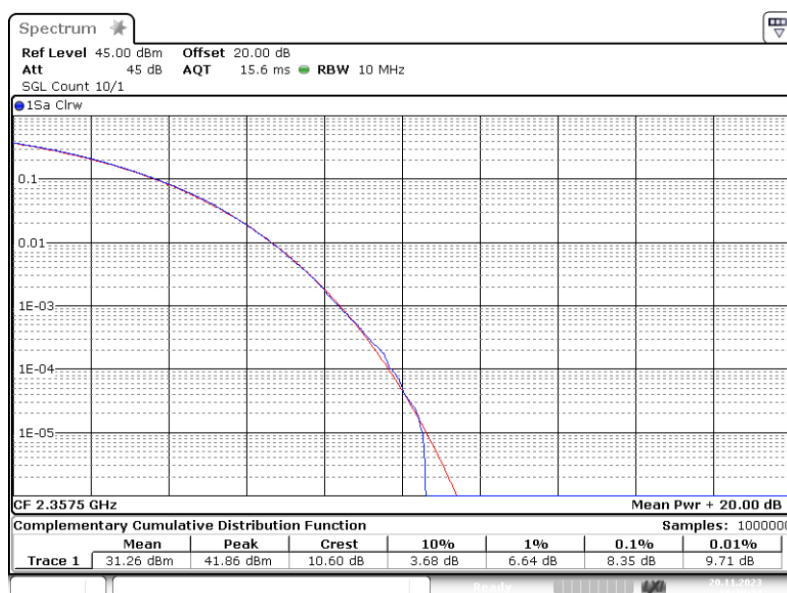


4.0 PAPR AWGN Out +3 2.358G




EMC Test Report No.: 23-0223

EMC tests on Andrew CAP M2 17E/19/23/25T [WCS 2300] F-AC-F1

Band: .WCS 2300; ANT 2; Frequency: 2.3576 GHz; Band Edge: f0; Mod: GSM; PAPR 0.3 dB < AGC

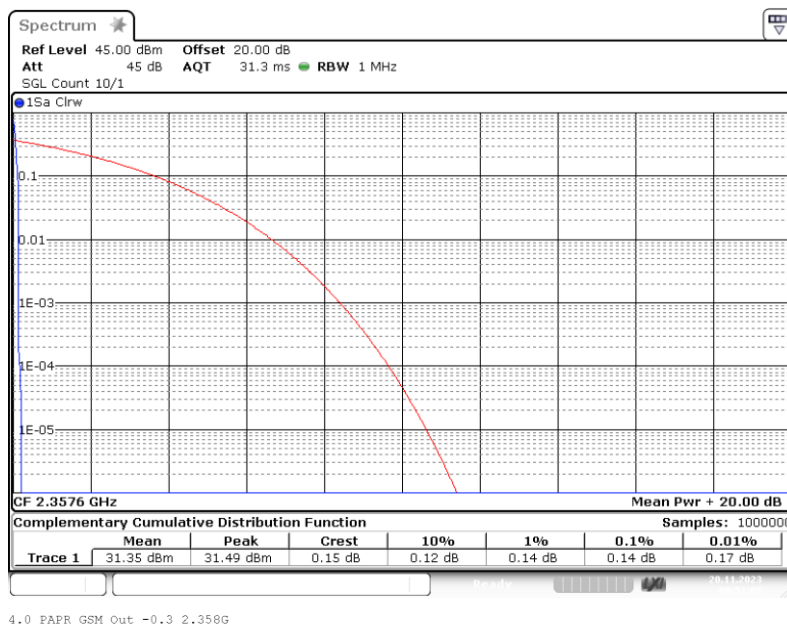

Band: .WCS 2300; ANT 2; Frequency: 2.3576 GHz; Band Edge: f0; Mod: GSM; PAPR 3 dB > AGC

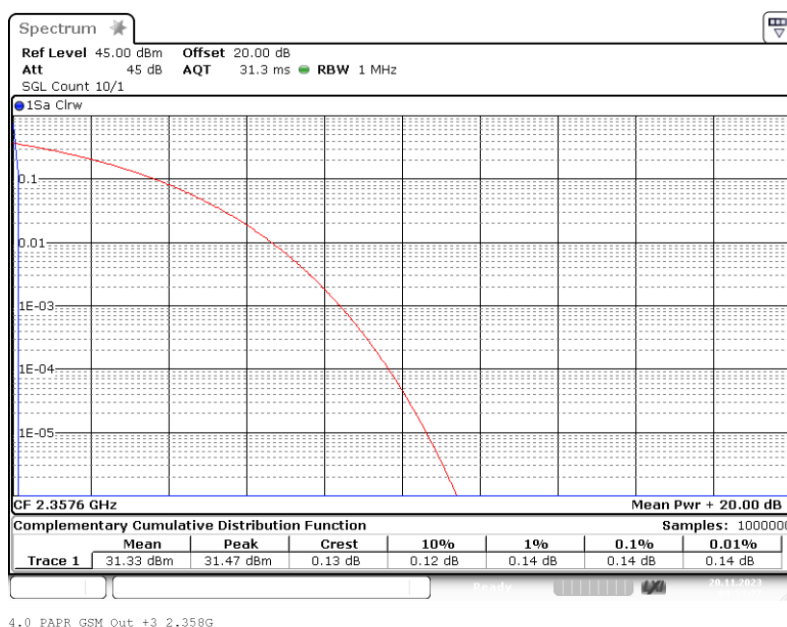





EMC Test Report No.: 23-0223

EMC tests on Andrew CAP M2 17E/19/23/25T [WCS 2300] F-AC-F1

Band: .WCS 2300; ANT 2; Frequency: 2.3550 GHz; Band Edge: mid; Mod: AWGN 10M; PAPR 0.3 dB < AGC

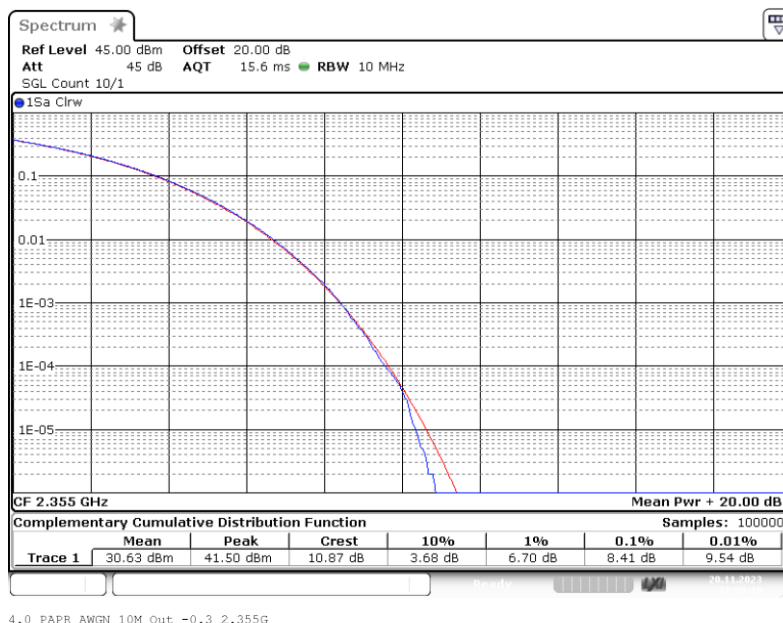

Band: .WCS 2300; ANT 2; Frequency: 2.3550 GHz; Band Edge: mid; Mod: AWGN 10M; PAPR 3 dB > AGC

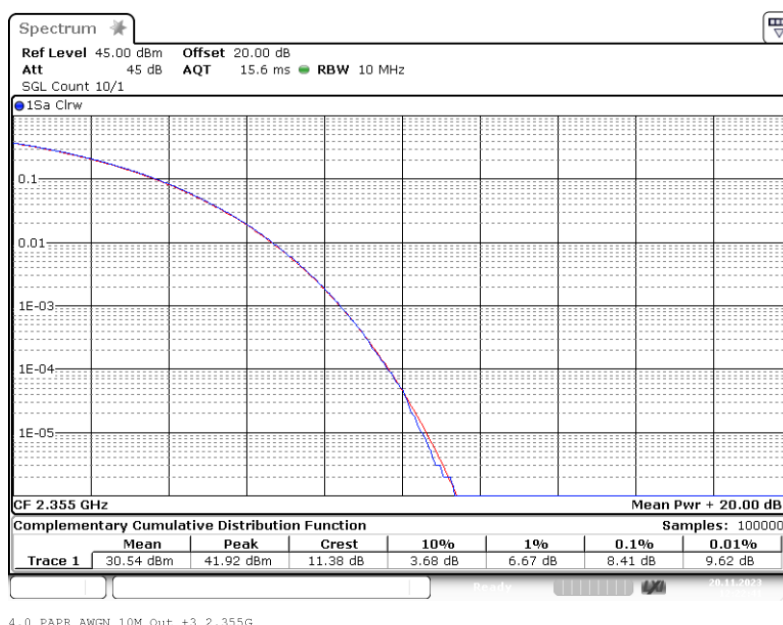

4.2.5 TEST EQUIPMENT USED

- Conducted



EMC Test Report No.: 23-0223

EMC tests on Andrew CAP M2 17E/19/23/25T [WCS 2300] F-AC-F1

4.3 OCCUPIED BANDWIDTH/INPUT-VERSUS-OUTPUT SPECTRUM

Standard FCC Part 2.1049; Occupied Bandwidth

The test was performed according to:

ANSI C63.26, KDB 935210 D05 v01r04: 3.4

Test date: 2023-11-20


Environmental conditions: 23 °C ± 5 K; 40 % r. F. ± 20 % r. F.

Test engineer: Thomas Hufnagel

4.3.1 TEST DESCRIPTION

This test case is intended to demonstrate compliance to the applicable conducted spurious emission limits.

The EUT was connected to the test setups according to the following diagram:

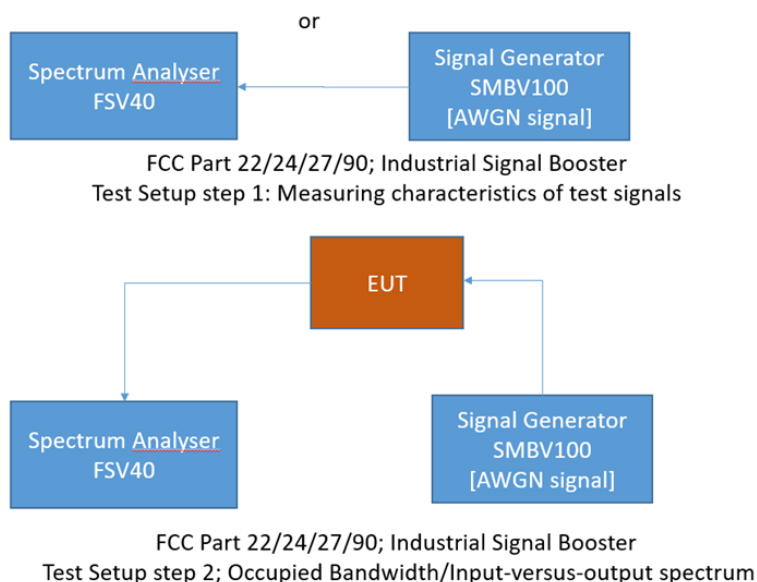

The attenuation of the measuring and stimulus path are known for each measured frequency and are considered.

The Spectrum Analyzer settings can be directly found in the measurement diagrams.



4.3.2 TEST REQUIREMENTS/LIMITS

Abstract § 2.1049 from FCC:

FCC Part 2.1049; Occupied Bandwidth:

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.3 percent of the total mean power radiated by a given emission shall be measured under the following conditions as applicable:

(h) Transmitters employing digital modulation techniques—when modulated by an input signal such that its amplitude and symbol rate represent the maximum rated conditions under which the equipment will be operated. The signal shall be applied through any filter networks, pseudo-random generators or other devices required in normal service. Additionally, the occupied bandwidth shall be shown for operation with any devices used for modifying the spectrum when such devices are optional at the discretion of the user.

(i) Transmitters designed for other types of modulation—when modulated by an appropriate signal of sufficient amplitude to be representative of the type of service in which used. A description of the input signal should be supplied.

**EMC Test Report No.: 23-0223**

EMC tests on Andrew CAP M2 17E/19/23/25T [WCS 2300] F-AC-F1



4.3.3 TEST PROTOCOL

Band 30 WCS 2300, downlink							
Signal Type	Input Power	Signal Frequency [MHz]	Occupied Bandwidth SG [kHz]	Occupied Bandwidth Booster [kHz]	Delta Occupied Bandwidth [kHz]	Limit Delta Occupied Bandwidth [kHz]	Margin to Limit [kHz]
Wideband	0.3 dB < AGC	2355.0	4386.0	4382.3	3.7	205.0	201.3
Wideband	3 dB > AGC	2355.0	4389.0	4387.2	1.9	205.0	203.1
Narrowband	0.3 dB < AGC	2356.0	314.9	318.8	3.9	10.0	6.1
Narrowband	3 dB > AGC	2356.0	324.1	315.7	8.4	10.0	1.6
Wideband 5G	0.3 dB < AGC	2355.0	9949.0	9944.5	4.5	470.0	465.5
Wideband 5G	3 dB > AGC	2355.0	9950.5	9943.0	7.5	470.0	462.5

Remark: Please see next sub-clause for the measurement plot.




BUREAU
VERITAS

EMC Test Report No.: 23-0223

EMC tests on Andrew CAP M2 17E/19/23/25T [WCS 2300] F-AC-F1


4.3.4 MEASUREMENT PLOT

Band: .WCS 2300; ANT 2; Frequency: 2.3550 GHz; Band Edge: mid; Mod: AWGN; Input OCBw 0.3 dB < AGC

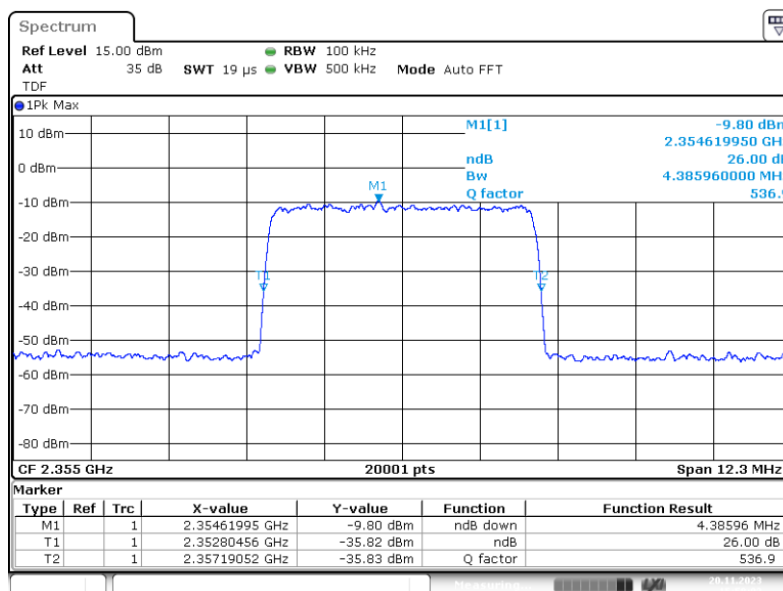

3.4 OCBw AWGN In-0.3 2.3550G _26dB

Band: .WCS 2300; ANT 2; Frequency: 2.3550 GHz; Band Edge: mid; Mod: AWGN; Output OCBw 0.3 dB < AGC

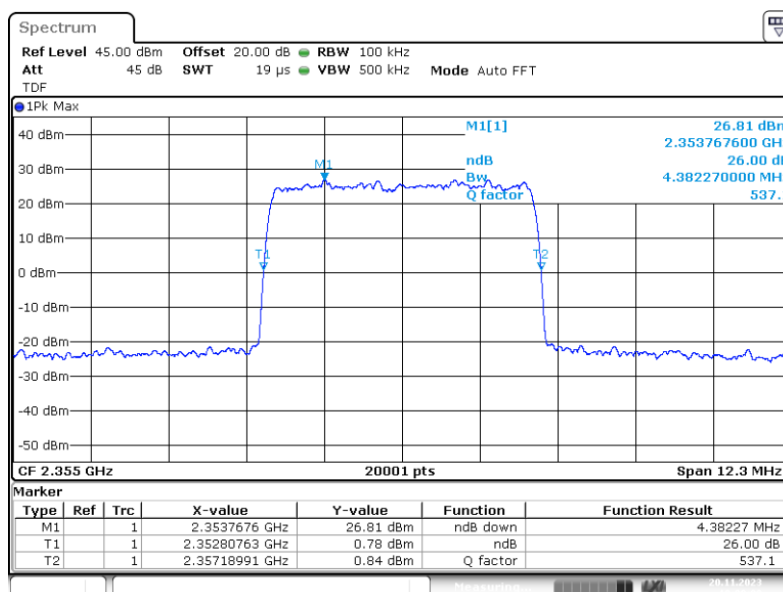

3.4 OCBw AWGN Out -0.3 2.3550G _26dB




EMC Test Report No.: 23-0223


EMC tests on Andrew CAP M2 17E/19/23/25T [WCS 2300] F-AC-F1



Band: .WCS 2300; ANT 2; Frequency: 2.3550 GHz; Band Edge: mid; Mod: AWGN; Input OCBw 3 dB > AGC

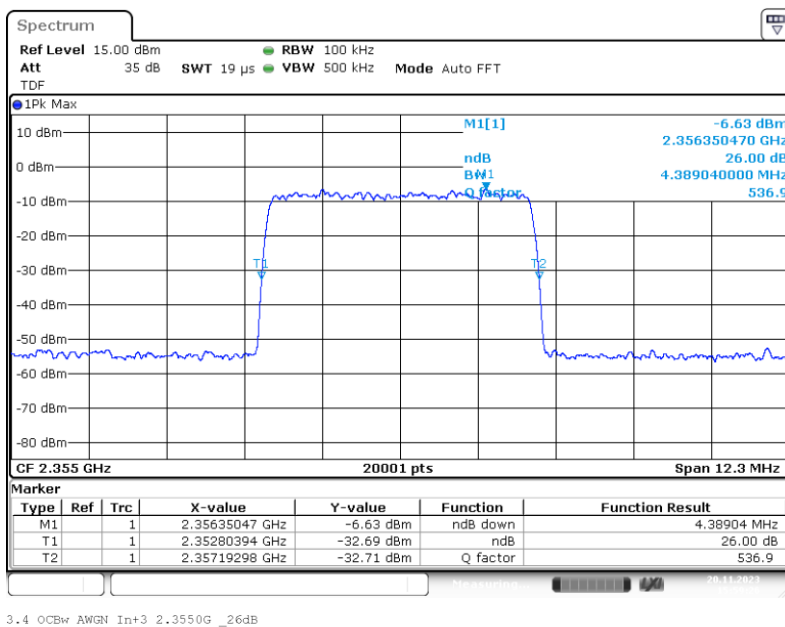

Band: .WCS 2300; ANT 2; Frequency: 2.3550 GHz; Band Edge: mid; Mod: AWGN; Output OCBw 3 dB > AGC

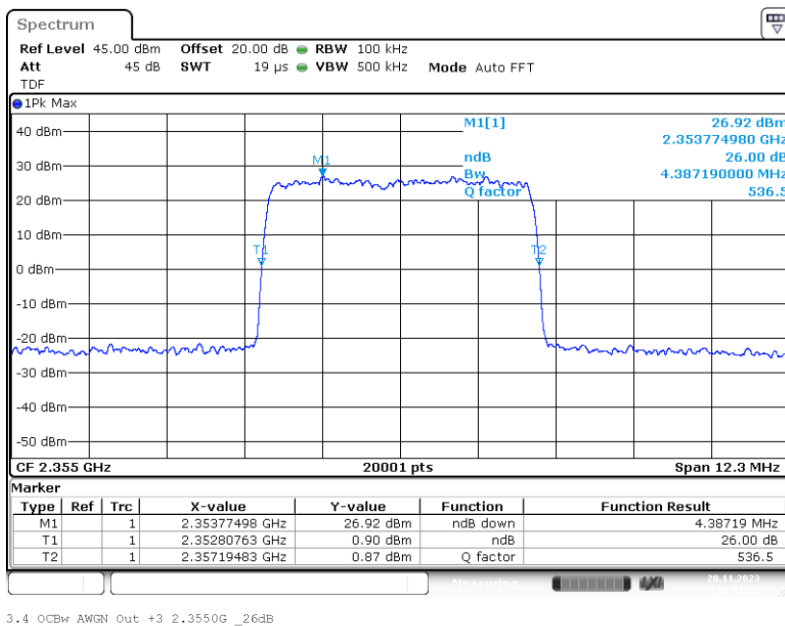




EMC Test Report No.: 23-0223


EMC tests on Andrew CAP M2 17E/19/23/25T [WCS 2300] F-AC-F1



Band: .WCS 2300; ANT 2; Frequency: 2.3560 GHz; Band Edge: mid; Mod: GSM; Input OCBw 0.3 dB < AGC

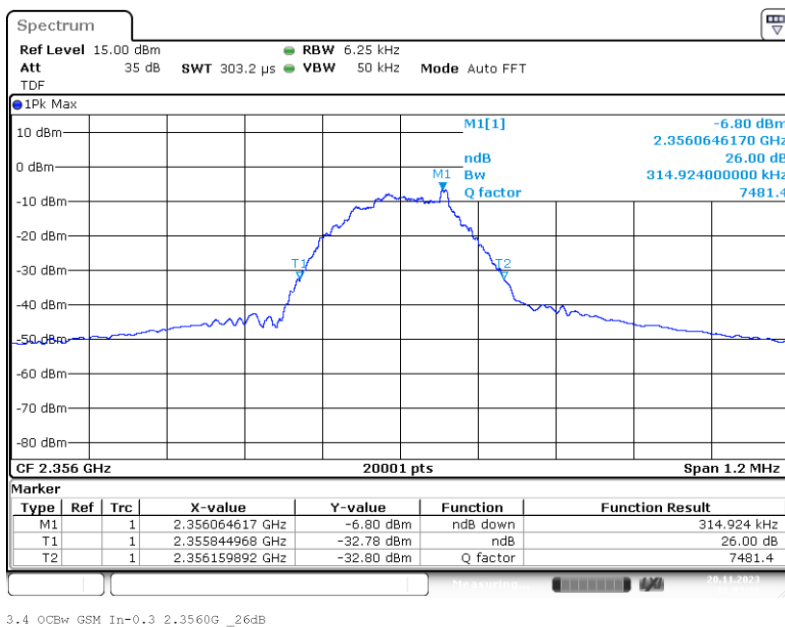

Band: .WCS 2300; ANT 2; Frequency: 2.3560 GHz; Band Edge: mid; Mod: GSM; Output OCBw 0.3 dB < AGC

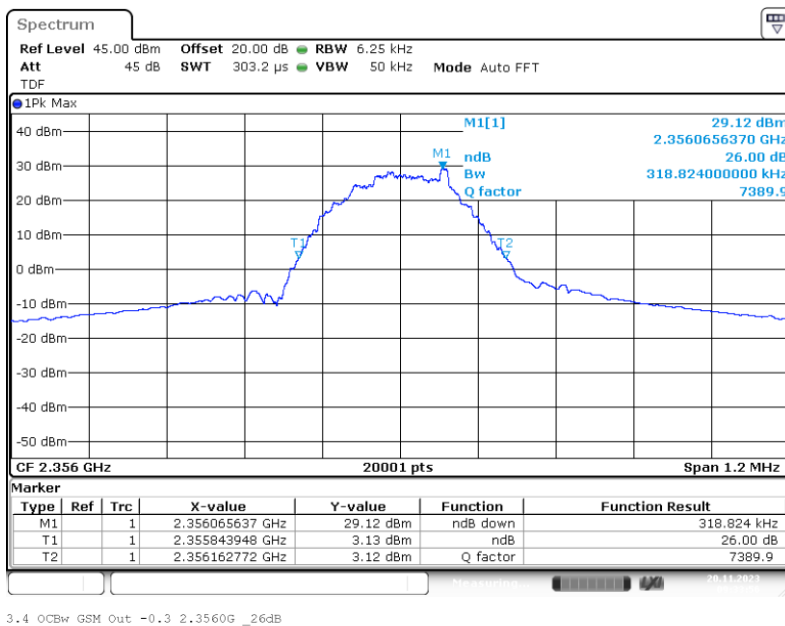




EMC Test Report No.: 23-0223


EMC tests on Andrew CAP M2 17E/19/23/25T [WCS 2300] F-AC-F1



Band: .WCS 2300; ANT 2; Frequency: 2.3560 GHz; Band Edge: mid; Mod: GSM; Input OCBw 3 dB > AGC

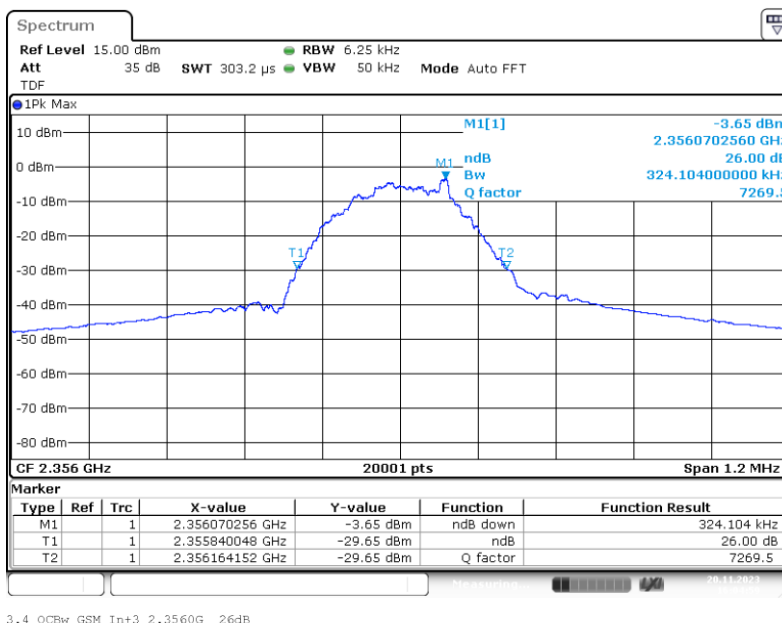

Band: .WCS 2300; ANT 2; Frequency: 2.3560 GHz; Band Edge: mid; Mod: GSM; Output OCBw 3 dB > AGC

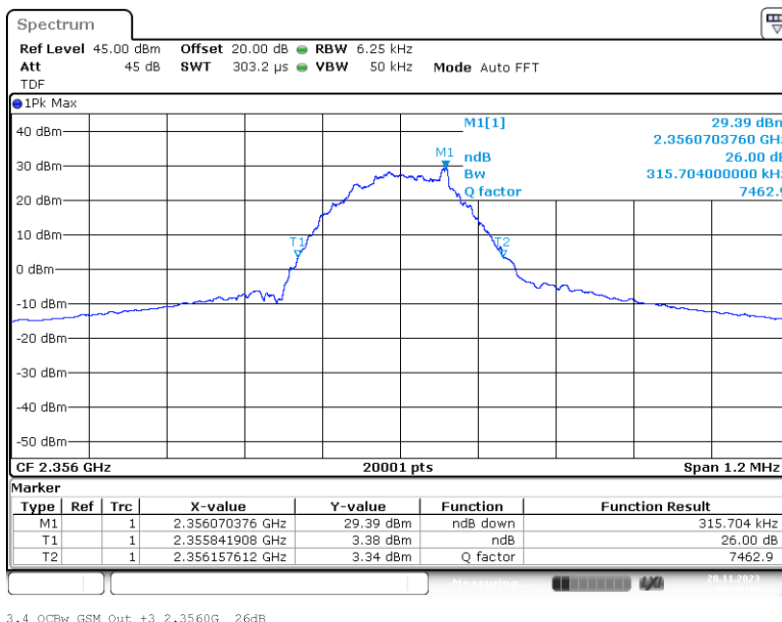




EMC Test Report No.: 23-0223

EMC tests on Andrew CAP M2 17E/19/23/25T [WCS 2300] F-AC-F1




Band: .WCS 2300; ANT 2; Frequency: 2.3550 GHz; Band Edge: mid; Mod: AWGN 10M; Input OCBw 0.3 dB < AGC

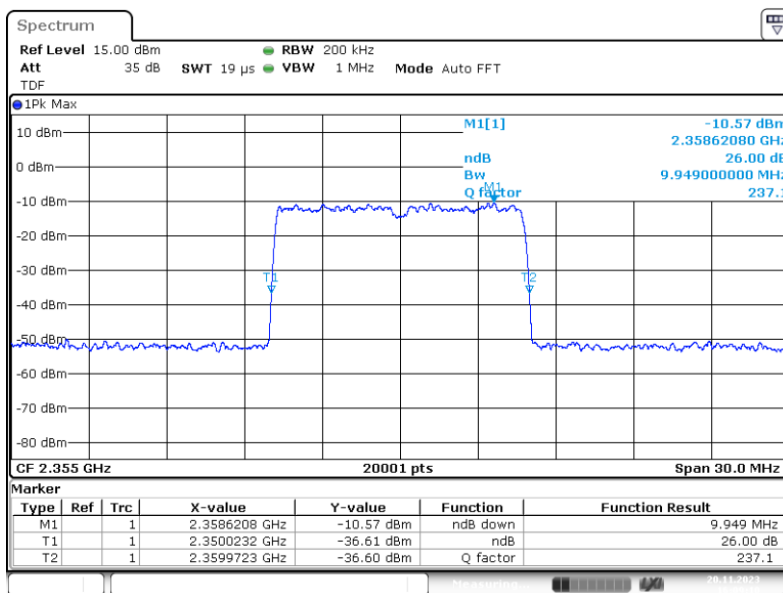

3.4 OCBw AWGN 10M In-0.3 2.3550G _26dB

Band: .WCS 2300; ANT 2; Frequency: 2.3550 GHz; Band Edge: mid; Mod: AWGN 10M; Output OCBw 0.3 dB < AGC

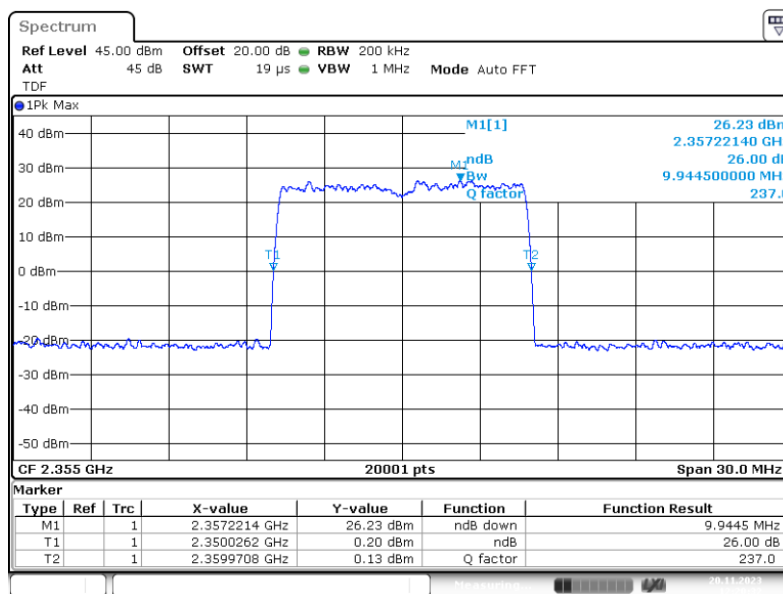


3.4 OCBw AWGN 10M Out -0.3 2.3550G _26dB



EMC Test Report No.: 23-0223


EMC tests on Andrew CAP M2 17E/19/23/25T [WCS 2300] F-AC-F1

Band: .WCS 2300; ANT 2; Frequency: 2.3550 GHz; Band Edge: mid; Mod: AWGN 10M; Input OCBw 3 dB > AGC

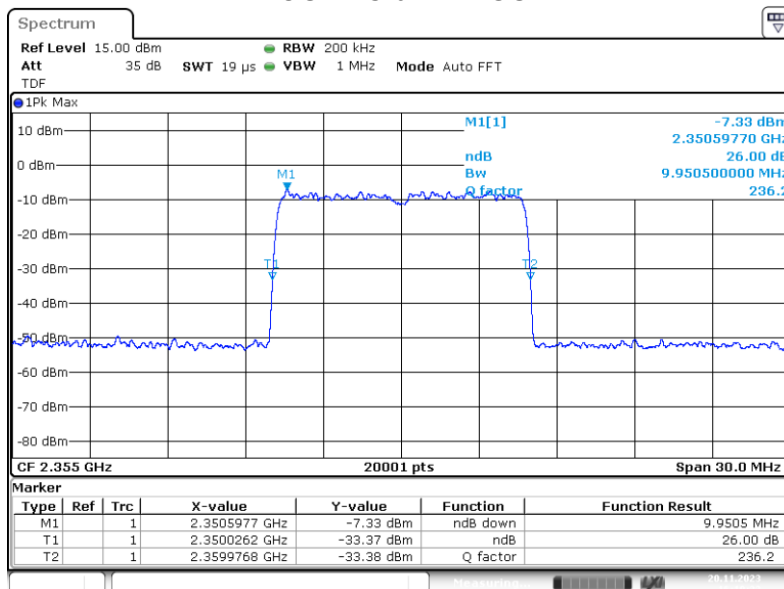

3.4 OCBw AWGN 10M In+3 2.3550G _26dB

Band: .WCS 2300; ANT 2; Frequency: 2.3550 GHz; Band Edge: mid; Mod: AWGN 10M; Output OCBw 3 dB > AGC

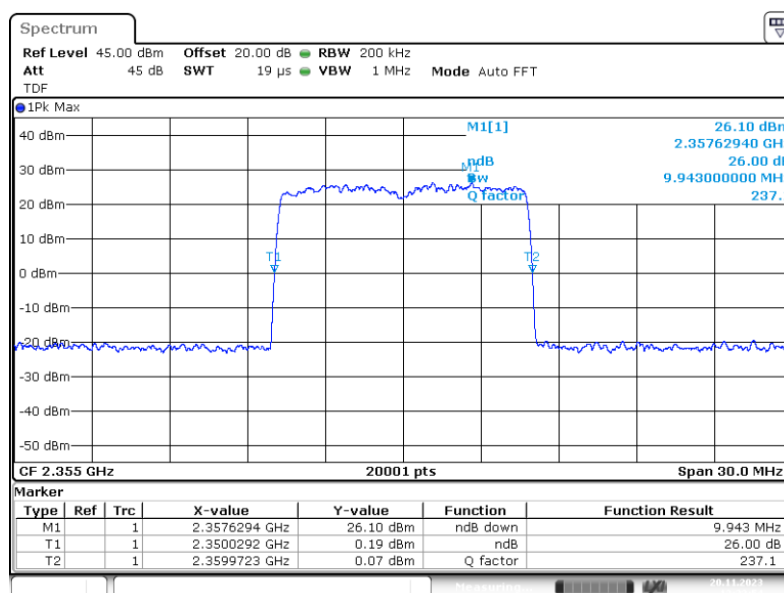

3.4 OCBw AWGN 10M Out +3 2.3550G _26dB

4.3.5 TEST EQUIPMENT USED

- Conducted

EMC Test Report No.: 23-0223

EMC tests on Andrew CAP M2 17E/19/23/25T [WCS 2300] F-AC-F1

4.4 CONDUCTED SPURIOUS EMISSIONS AT ANTENNA TERMINALS

Standard FCC Part § 2.1051, § 27.53

The test was performed according to:
ANSI C63.26, KDB 935210 D05 v01r04: 3.6

Test date: 2023-12-14


Environmental conditions: 23 °C ± 5 K; 40 % r. F. ± 20 % r. F.

Test engineer: Thomas Hufnagel

4.4.1 TEST DESCRIPTION

This test case is intended to demonstrate compliance to the signal booster power and gain limits and requirements for industrial signal boosters.

The EUT was connected to the test setup according to the following diagram:

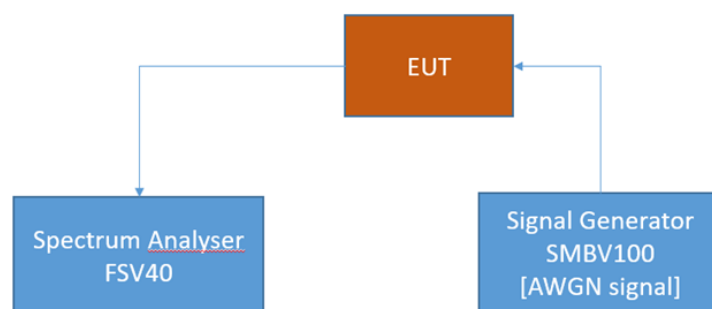

FCC Part 22/24/27/90 Industrial signal booster – Test Setup; RF Output Power / Gain

The attenuation of the measuring and stimulus path are known for each measured frequency and are considered.

The Spectrum Analyzer settings can be directly found in the measurement diagrams.



4.4.2 TEST REQUIREMENTS/LIMITS

Abstract § 2.1051 from FCC:

FCC Part 2.1051; Measurement required: Spurious emissions at antenna terminal:

The radio frequency voltage or powers generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of each harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in § 2.1049 as appropriate. The magnitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be specified.

Part 27; Miscellaneous Wireless Communication Services

Subpart C – Technical standards

§27.53 – Emission limits

Abstract § 27.53 FCC:

(a) For operations in the 2305-2320 MHz band and the 2345-2360 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power P (with averaging performed only during periods of transmission) within the licensed band(s) of operation, in watts, by the following amounts:

(1) For base and fixed stations' operations in the 2305-2320 MHz band and the 2345-2360 MHz band:

(i) By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2305 and 2320 MHz and on all frequencies between 2345 and 2360 MHz that are outside the licensed band(s) of operation, and not less than $75 + 10 \log (P)$ dB on all frequencies between 2320 and 2345 MHz;

(ii) By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2300 and 2305 MHz, $70 + 10 \log (P)$ dB on all frequencies between 2287.5 and 2300 MHz, $72 + 10 \log (P)$ dB on all frequencies between 2285 and 2287.5 MHz, and $75 + 10 \log (P)$ dB below 2285 MHz;

(iii) By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2360 and 2362.5 MHz, $55 + 10 \log (P)$ dB on all frequencies between 2362.5 and 2365 MHz, $70 + 10 \log (P)$ dB on all frequencies between 2365 and 2367.5 MHz, $72 + 10 \log (P)$ dB on all frequencies between 2367.5 and 2370 MHz, and $75 + 10 \log (P)$ dB above 2370 MHz.



(2) For fixed customer premises equipment (CPE) stations operating in the 2305-2320 MHz band and the 2345-2360 MHz band transmitting with more than 2 watts per 5 megahertz average EIRP:

(i) By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2305 and 2320 MHz and on all frequencies between 2345 and 2360 MHz that are outside the licensed band(s) of operation, and not less than $75 + 10 \log (P)$ dB on all frequencies between 2320 and 2345 MHz;

(ii) By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2300 and 2305 MHz, $70 + 10 \log (P)$ dB on all frequencies between 2287.5 and 2300 MHz, $72 + 10 \log (P)$ dB on all frequencies between 2285 and 2287.5 MHz, and $75 + 10 \log (P)$ dB below 2285 MHz;

(iii) By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2360 and 2362.5 MHz, $55 + 10 \log (P)$ dB on all frequencies between 2362.5 and 2365 MHz, $70 + 10 \log (P)$ dB on all frequencies between 2365 and 2367.5 MHz, $72 + 10 \log (P)$ dB on all frequencies between 2367.5 and 2370 MHz, and $75 + 10 \log (P)$ dB above 2370 MHz.

(3) For fixed CPE stations operating in the 2305-2320 MHz and 2345-2360 MHz bands transmitting with 2 watts per 5 megahertz average EIRP or less:

(i) By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2305 and 2320 MHz and on all frequencies between 2345 and 2360 MHz that are outside the licensed band(s) of operation, not less than $55 + 10 \log (P)$ dB on all frequencies between 2320 and 2324 MHz and between 2341 and 2345 MHz, not less than $61 + 10 \log (P)$ dB on all frequencies between 2324 and 2328 MHz and between 2337 and 2341 MHz, and not less than $67 + 10 \log (P)$ dB on all frequencies between 2328 and 2337 MHz;

(ii) By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2300 and 2305 MHz, $55 + 10 \log (P)$ dB on all frequencies between 2296 and 2300 MHz, $61 + 10 \log (P)$ dB on all frequencies between 2292 and 2296 MHz, $67 + 10 \log (P)$ dB on all frequencies between 2288 and 2292 MHz, and $70 + 10 \log (P)$ dB below 2288 MHz;

(iii) By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2360 and 2365 MHz, and not less than $70 + 10 \log (P)$ dB above 2365 MHz.



EMC Test Report No.: 23-0223

EMC tests on Andrew CAP M2 17E/19/23/25T [WCS 2300] F-AC-F1

4.4.3 TEST PROTOCOL

General considerations concerning the limits:

The measuring bandwidth of 1 MHz was chosen according the test requirements except at the band edges: At the band edges reducing of measurement bandwidth was necessary to prevent overlaying the RF-signal over the spurious emissions.

Also outside the Downlink frequency band at lower frequencies the measurement bandwidths were reduced to have the possibility to record the spurious emissions at these lower frequencies.

At frequencies where measuring bandwidths were reduced also the limit lines were reduced according the given formula:

$$p_{RBWreduced} [dBm] = 10 * \log \left(RBWreduced [kHz] - 1000 \text{ kHz} \right) + p_{RBW 1000 \text{ kHz}} [dBm]$$

Hereby "p" are the limit lines' values.



EMC Test Report No.: 23-0223

EMC tests on Andrew CAP M2 17E/19/23/25T [WCS 2300] F-AC-F1



Band 30, WCS 2300, downlink							
Test Frequency	Signal Type	Spurious Freq. [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Limit [dBm]	Margin to Limit [dB]
low	Wideband	0.00905	-90.6	RMS	1	-75.0	15.6
low	Wideband	0.14749	-75.4	RMS	10	-65.0	10.4
low	Wideband	949.4	-63.6	RMS	100	-55.0	8.6
low	Wideband	2248.8	-47.3	RMS	1000	-45.0	2.3
low	Wideband	2285.3	-48.7	RMS	1000	-42.0	6.7
low	Wideband	2291.1	-55.2	RMS	100	-50.0	5.2
low	Wideband	2302.2	-48.2	RMS	100	-42.0	6.2
low	Wideband	2305.9	-47.1	RMS	100	-23.0	24.1
low	Wideband	2326.4	-65.8	RMS	100	-45.0	20.8
low	Wideband	2341.5	-56.9	RMS	100	-55.0	1.9
low	Wideband	2360.1	-44.7	RMS	100	-23.0	21.7
low	Wideband	2360.2	-47.4	RMS	100	-23.0	24.4
low	Wideband	2366.7	-56.6	RMS	100	-50.0	6.6
low	Wideband	2366.1	-57.4	RMS	100	-50.0	7.4
low	Wideband	2366.7	-56.6	RMS	100	-50.0	6.6
low	Wideband	2546.7	-52.1	RMS	1000	-45.0	7.1
low	Wideband	6973.0	-51.0	RMS	1000	-45.0	6.0
low	Wideband	19548.3	-51.0	RMS	1000	-45.0	6.0
low	Wideband	20296.2	-50.8	RMS	1000	-45.0	5.8
mid	Wideband	0.02650	-91.3	RMS	1	-75.0	16.3
mid	Wideband	0.15749	-75.7	RMS	10	-65.0	10.7
mid	Wideband	952.1	-62.9	RMS	100	-55.0	7.9
mid	Wideband	2111.3	-46.8	RMS	1000	-45.0	1.8
mid	Wideband	2287.1	-49.2	RMS	1000	-42.0	7.2
mid	Wideband	2288.6	-55.5	RMS	100	-50.0	5.5
mid	Wideband	2301.6	-48.2	RMS	100	-42.0	6.2
mid	Wideband	2311.9	-47.3	RMS	100	-23.0	24.3
mid	Wideband	2321.0	-66.4	RMS	100	-45.0	21.4
mid	Wideband	2334.4	-56.6	RMS	100	-55.0	1.6
mid	Wideband	2360.0	-43.1	RMS	100	-23.0	20.1
mid	Wideband	2361.7	-47.9	RMS	100	-23.0	24.9
mid	Wideband	2366.1	-56.4	RMS	100	-50.0	6.4
mid	Wideband	2366.1	-56.9	RMS	100	-50.0	6.9
mid	Wideband	2366.1	-56.9	RMS	100	-50.0	6.9
mid	Wideband	2538.7	-52.1	RMS	1000	-45.0	7.1
mid	Wideband	6835.5	-51.1	RMS	1000	-45.0	6.1
mid	Wideband	19521.8	-50.6	RMS	1000	-45.0	5.6
mid	Wideband	20293.2	-50.7	RMS	1000	-45.0	5.7



EMC Test Report No.: 23-0223

EMC tests on Andrew CAP M2 17E/19/23/25T [WCS 2300] F-AC-F1



Band 30, WCS 2300, downlink							
Test Frequency	Signal Type	Spurious Freq. [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Limit [dBm]	Margin to Limit [dB]
high	Wideband	0.00905	-90.4	RMS	1	-75.0	15.4
high	Wideband	0.15249	-75.8	RMS	10	-65.0	10.8
high	Wideband	949.6	-64.1	RMS	100	-55.0	9.1
high	Wideband	1740.5	-47.2	RMS	1000	-45.0	2.2
high	Wideband	2285.5	-49.2	RMS	1000	-42.0	7.2
high	Wideband	2292.9	-55.3	RMS	100	-50.0	5.3
high	Wideband	2282.8	-48.4	RMS	100	-42.0	6.4
high	Wideband	2310.0	-47.3	RMS	100	-23.0	24.3
high	Wideband	2320.9	-66.2	RMS	100	-45.0	21.2
high	Wideband	2333.0	-56.6	RMS	100	-55.0	1.6
high	Wideband	2360.0	-40.3	RMS	100	-23.0	17.3
high	Wideband	2360.0	-40.5	RMS	100	-23.0	17.5
high	Wideband	2365.0	-57.3	RMS	100	-50.0	7.3
high	Wideband	2367.9	-56.1	RMS	100	-50.0	6.1
high	Wideband	2367.9	-56.4	RMS	100	-50.0	6.4
high	Wideband	2546.2	-52.0	RMS	1000	-45.0	7.0
high	Wideband	6868.0	-51.2	RMS	1000	-45.0	6.2
high	Wideband	19559.8	-50.4	RMS	1000	-45.0	5.4
high	Wideband	20302.2	-50.8	RMS	1000	-45.0	5.8



EMC Test Report No.: 23-0223

EMC tests on Andrew CAP M2 17E/19/23/25T [WCS 2300] F-AC-F1



Band 30, WCS 2300, downlink							
Test Frequency	Signal Type	Spurious Freq. [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Limit [dBm]	Margin to Limit [dB]
low	Narrowband	0.00996	-90.2	RMS	1	-75.0	15.2
low	Narrowband	0.14749	-75.3	RMS	10	-65.0	10.3
low	Narrowband	811.0	-64.3	RMS	100	-55.0	9.3
low	Narrowband	2243.3	-47.4	RMS	1000	-45.0	2.4
low	Narrowband	2284.3	-49.1	RMS	1000	-42.0	7.1
low	Narrowband	2287.7	-54.5	RMS	100	-50.0	4.5
low	Narrowband	2302.4	-47.4	RMS	100	-42.0	5.4
low	Narrowband	2314.4	-47.1	RMS	100	-23.0	24.1
low	Narrowband	2329.7	-65.7	RMS	100	-45.0	20.7
low	Narrowband	2332.0	-56.4	RMS	100	-55.0	1.4
low	Narrowband	2362.1	-46.9	RMS	100	-23.0	23.9
low	Narrowband	2360.0	-47.9	RMS	100	-23.0	24.9
low	Narrowband	2367.0	-58.2	RMS	100	-50.0	8.2
low	Narrowband	2368.3	-56.9	RMS	100	-50.0	6.9
low	Narrowband	2368.3	-57.4	RMS	100	-50.0	7.4
low	Narrowband	2546.2	-51.9	RMS	1000	-45.0	6.9
low	Narrowband	6944.0	-51.5	RMS	1000	-45.0	6.5
low	Narrowband	19887.8	-51.0	RMS	1000	-45.0	6.0
low	Narrowband	20324.7	-50.3	RMS	1000	-45.0	5.3
mid	Narrowband	0.01850	-90.1	RMS	1	-75.0	15.1
mid	Narrowband	0.10250	-76.1	RMS	10	-65.0	11.1
mid	Narrowband	950.9	-64.2	RMS	100	-55.0	9.2
mid	Narrowband	2184.3	-47.0	RMS	1000	-45.0	2.0
mid	Narrowband	2281.8	-49.0	RMS	1000	-42.0	7.0
mid	Narrowband	2289.1	-55.3	RMS	100	-50.0	5.3
mid	Narrowband	2300.6	-43.7	RMS	100	-42.0	1.7
mid	Narrowband	2300.6	-47.5	RMS	100	-23.0	24.5
mid	Narrowband	2327.4	-65.7	RMS	100	-45.0	20.7
mid	Narrowband	2330.6	-56.8	RMS	100	-55.0	1.8
mid	Narrowband	2360.0	-44.5	RMS	100	-23.0	21.5
mid	Narrowband	2360.1	-48.0	RMS	100	-23.0	25.0
mid	Narrowband	2365.9	-57.2	RMS	100	-50.0	7.2
mid	Narrowband	2369.5	-55.6	RMS	100	-50.0	5.6
mid	Narrowband	2369.0	-56.7	RMS	100	-50.0	6.7
mid	Narrowband	2546.2	-49.8	RMS	1000	-45.0	4.8
mid	Narrowband	6850.5	-51.4	RMS	1000	-45.0	6.4
mid	Narrowband	19538.3	-51.4	RMS	1000	-45.0	6.4
mid	Narrowband	20280.7	-51.1	RMS	1000	-45.0	6.1



EMC Test Report No.: 23-0223

EMC tests on Andrew CAP M2 17E/19/23/25T [WCS 2300] F-AC-F1



Band 30, WCS 2300, downlink							
Test Frequency	Signal Type	Spurious Freq. [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Limit [dBm]	Margin to Limit [dB]
high	Narrowband	0.01141	-90.3	RMS	1	-75.0	15.3
high	Narrowband	0.10250	-75.2	RMS	10	-65.0	10.2
high	Narrowband	950.6	-63.8	RMS	100	-55.0	8.8
high	Narrowband	2180.3	-46.7	RMS	1000	-45.0	1.7
high	Narrowband	2280.8	-49.4	RMS	1000	-42.0	7.4
high	Narrowband	2290.1	-55.3	RMS	100	-50.0	5.3
high	Narrowband	2300.0	-47.6	RMS	100	-42.0	5.6
high	Narrowband	2316.6	-46.0	RMS	100	-23.0	23.0
high	Narrowband	2325.3	-65.9	RMS	100	-45.0	20.9
high	Narrowband	2337.7	-57.2	RMS	100	-55.0	2.2
high	Narrowband	2361.5	-46.6	RMS	100	-23.0	23.6
high	Narrowband	2366.5	-56.9	RMS	100	-50.0	6.9
high	Narrowband	2368.0	-56.6	RMS	100	-50.0	6.6
high	Narrowband	2377.9	-55.3	RMS	100	-50.0	5.3
high	Narrowband	2546.2	-51.0	RMS	1000	-45.0	6.0
high	Narrowband	6855.0	-51.1	RMS	1000	-45.0	6.1
high	Narrowband	19976.3	-51.0	RMS	1000	-45.0	6.0
high	Narrowband	20298.2	-50.7	RMS	1000	-45.0	5.7

**EMC Test Report No.: 23-0223**

EMC tests on Andrew CAP M2 17E/19/23/25T [WCS 2300] F-AC-F1



Band 30, WCS 2300, downlink							
Test Frequency	Signal Type	Spurious Freq. [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Limit [dBm]	Margin to Limit [dB]
low	Wideband 5G	0.00905	-91.3	RMS	1	-75.0	16.3
low	Wideband 5G	0.14749	-75.6	RMS	10	-65.0	10.6
low	Wideband 5G	950.1	-64.0	RMS	100	-55.0	9.0
low	Wideband 5G	1828.9	-47.1	RMS	1000	-45.0	2.1
low	Wideband 5G	2287.1	-47.9	RMS	1000	-42.0	5.9
low	Wideband 5G	2290.0	-55.5	RMS	100	-50.0	5.5
low	Wideband 5G	2287.1	-47.9	RMS	100	-42.0	5.9
low	Wideband 5G	2312.8	-47.6	RMS	100	-23.0	24.6
low	Wideband 5G	2328.3	-65.7	RMS	100	-45.0	20.7
low	Wideband 5G	2331.0	-56.6	RMS	100	-55.0	1.6
low	Wideband 5G	2360.0	-36.7	RMS	100	-23.0	13.7
low	Wideband 5G	2361.5	-43.7	RMS	100	-23.0	20.7
low	Wideband 5G	2366.9	-56.1	RMS	100	-50.0	6.1
low	Wideband 5G	2365.9	-56.9	RMS	100	-50.0	6.9
low	Wideband 5G	2365.9	-57.1	RMS	100	-50.0	7.1
low	Wideband 5G	2546.2	-51.1	RMS	1000	-45.0	6.1
low	Wideband 5G	6839.5	-50.6	RMS	1000	-45.0	5.6
low	Wideband 5G	19970.3	-51.4	RMS	1000	-45.0	6.4
low	Wideband 5G	20295.2	-50.9	RMS	1000	-45.0	5.9
mid	Wideband 5G	0.01550	-90.6	RMS	1	-75.0	15.6
mid	Wideband 5G	0.15749	-75.9	RMS	10	-65.0	10.9
mid	Wideband 5G	951.4	-64.3	RMS	100	-55.0	9.3
mid	Wideband 5G	1681.0	-47.2	RMS	1000	-45.0	2.2
mid	Wideband 5G	2286.7	-49.2	RMS	1000	-42.0	7.2
mid	Wideband 5G	2290.1	-55.3	RMS	100	-50.0	5.3
mid	Wideband 5G	2302.9	-47.9	RMS	100	-42.0	5.9
mid	Wideband 5G	2309.3	-47.4	RMS	100	-23.0	24.4
mid	Wideband 5G	2320.4	-66.1	RMS	100	-45.0	21.1
mid	Wideband 5G	2331.0	-56.7	RMS	100	-55.0	1.7
mid	Wideband 5G	2360.0	-36.7	RMS	100	-23.0	13.7
mid	Wideband 5G	2362.0	-41.3	RMS	100	-23.0	18.3
mid	Wideband 5G	2365.3	-57.2	RMS	100	-50.0	7.2
mid	Wideband 5G	2368.1	-56.9	RMS	100	-50.0	6.9
mid	Wideband 5G	2365.3	-57.2	RMS	100	-50.0	7.2
mid	Wideband 5G	2546.2	-51.0	RMS	1000	-45.0	6.0
mid	Wideband 5G	6999.0	-51.2	RMS	1000	-45.0	6.2
mid	Wideband 5G	19546.3	-51.2	RMS	1000	-45.0	6.2
mid	Wideband 5G	20022.2	-51.4	RMS	1000	-45.0	6.4



EMC Test Report No.: 23-0223

EMC tests on Andrew CAP M2 17E/19/23/25T [WCS 2300] F-AC-F1




Band 30, WCS 2300, downlink							
Test Frequency	Signal Type	Spurious Freq. [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Limit [dBm]	Margin to Limit [dB]
high	Wideband 5G	0.01550	-90.0	RMS	1	-75.0	15.0
high	Wideband 5G	0.12749	-76.3	RMS	10	-65.0	11.3
high	Wideband 5G	949.3	-63.9	RMS	100	-55.0	8.9
high	Wideband 5G	2161.3	-47.2	RMS	1000	-45.0	2.2
high	Wideband 5G	2284.3	-49.3	RMS	1000	-42.0	7.3
high	Wideband 5G	2290.6	-55.1	RMS	100	-50.0	5.1
high	Wideband 5G	2303.0	-47.9	RMS	100	-42.0	5.9
high	Wideband 5G	2316.3	-47.1	RMS	100	-23.0	24.1
high	Wideband 5G	2321.5	-65.9	RMS	100	-45.0	20.9
high	Wideband 5G	2330.5	-56.0	RMS	100	-55.0	1.0
high	Wideband 5G	2360.0	-37.4	RMS	100	-23.0	14.4
high	Wideband 5G	2361.8	-45.3	RMS	100	-23.0	22.3
high	Wideband 5G	2366.0	-57.7	RMS	100	-50.0	7.7
high	Wideband 5G	2367.7	-57.2	RMS	100	-50.0	7.2
high	Wideband 5G	2376.5	-56.6	RMS	100	-50.0	6.6
high	Wideband 5G	2546.2	-49.1	RMS	1000	-45.0	4.1
high	Wideband 5G	6819.5	-51.2	RMS	1000	-45.0	6.2
high	Wideband 5G	19579.8	-51.1	RMS	1000	-45.0	6.1
high	Wideband 5G	20294.2	-50.6	RMS	1000	-45.0	5.6


Remark: Please see next sub-clause for the measurement plot.

4.4.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE. "WORST CASE")

Frequency Band = Band 30 WCS 2300, ANT 2, Test Frequency = low, Direction = RF downlink, Signal Type = AWGN

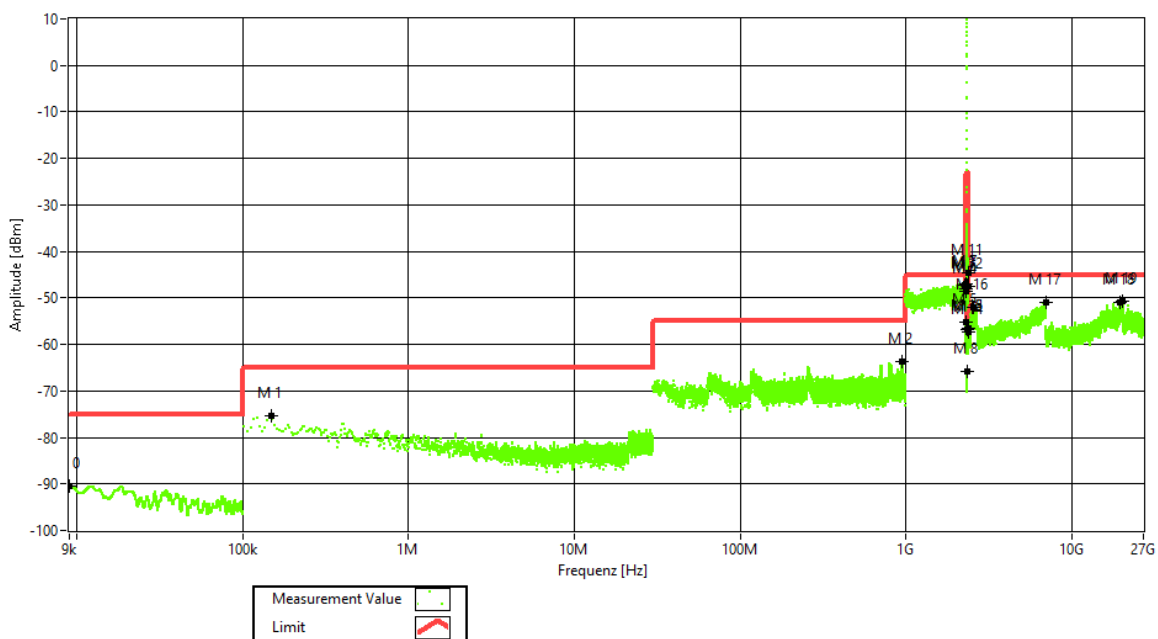

Frequency Band = Band 30 WCS 2300, ANT 2, Test Frequency = mid, Direction = RF downlink, Signal Type = AWGN

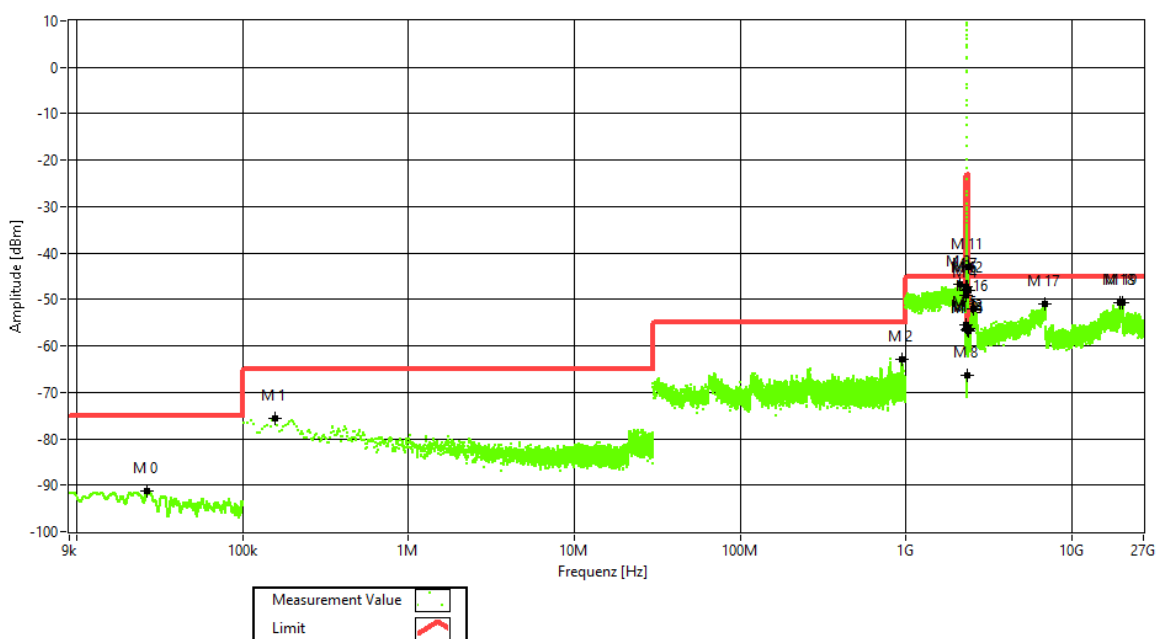




EMC Test Report No.: 23-0223

EMC tests on Andrew CAP M2 17E/19/23/25T [WCS 2300] F-AC-F1



Frequency Band = Band 30 WCS 2300, ANT 2, Test Frequency = high, Direction = RF downlink,
Signal Type = AWGN

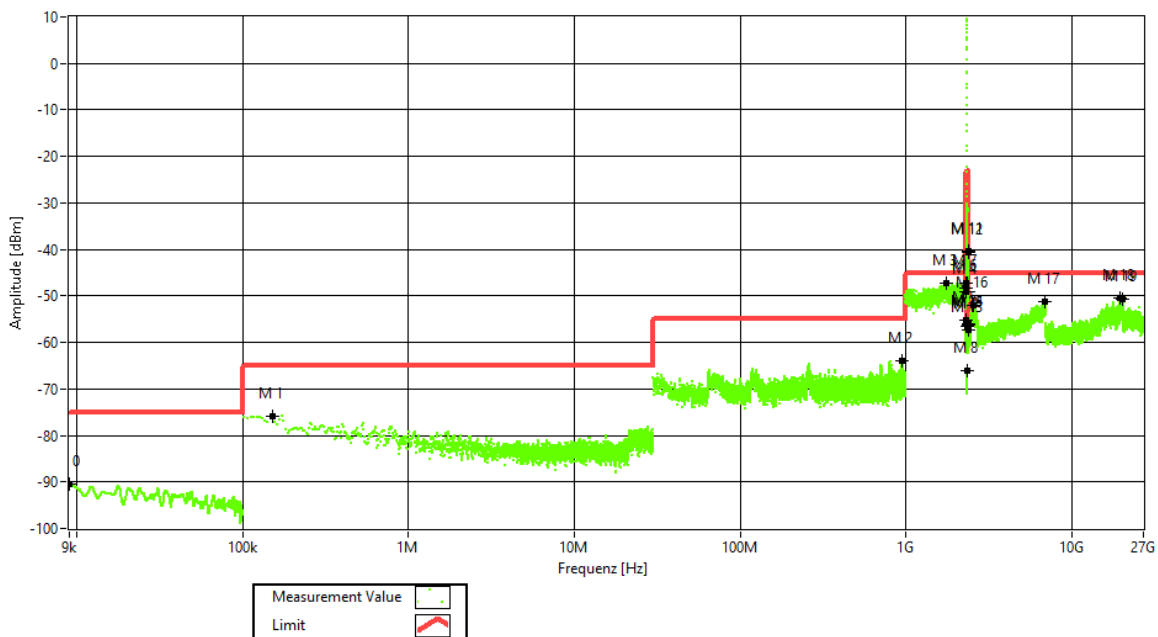




EMC Test Report No.: 23-0223


EMC tests on Andrew CAP M2 17E/19/23/25T [WCS 2300] F-AC-F1



Frequency Band = Band 30 WCS 2300, ANT 2, Test Frequency = low, Direction = RF downlink, Signal Type = GSM

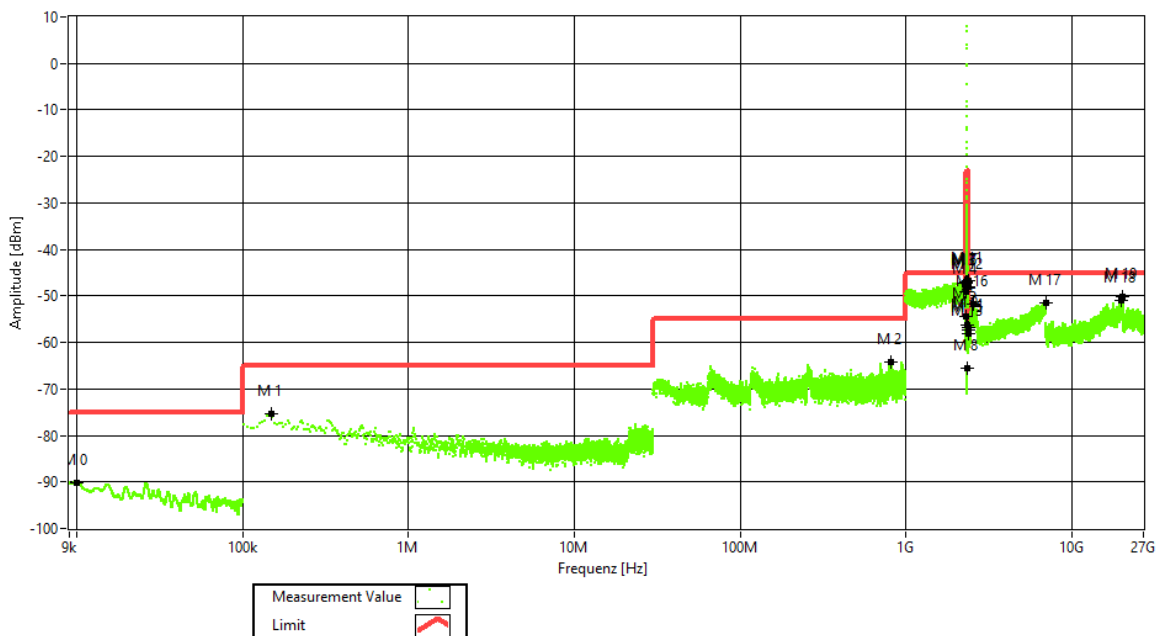

Frequency Band = Band 30 WCS 2300, ANT 2, Test Frequency = mid, Direction = RF downlink, Signal Type = GSM

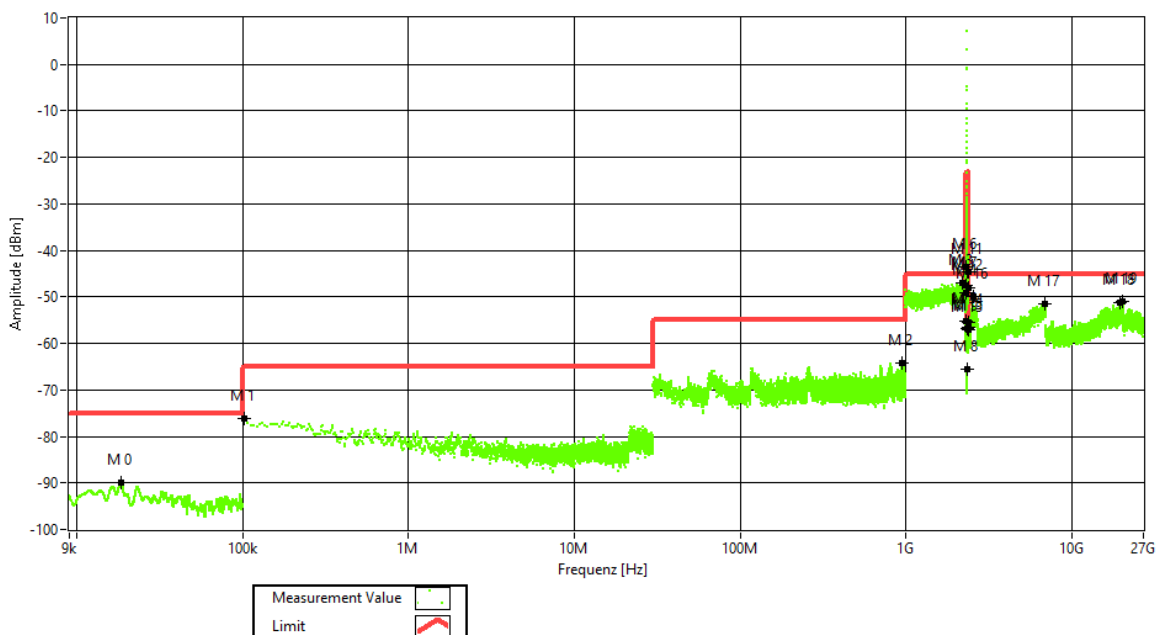




EMC Test Report No.: 23-0223

EMC tests on Andrew CAP M2 17E/19/23/25T [WCS 2300] F-AC-F1



Frequency Band = Band 30 WCS 2300, ANT 2, Test Frequency = high, Direction = RF downlink,
Signal Type = GSM

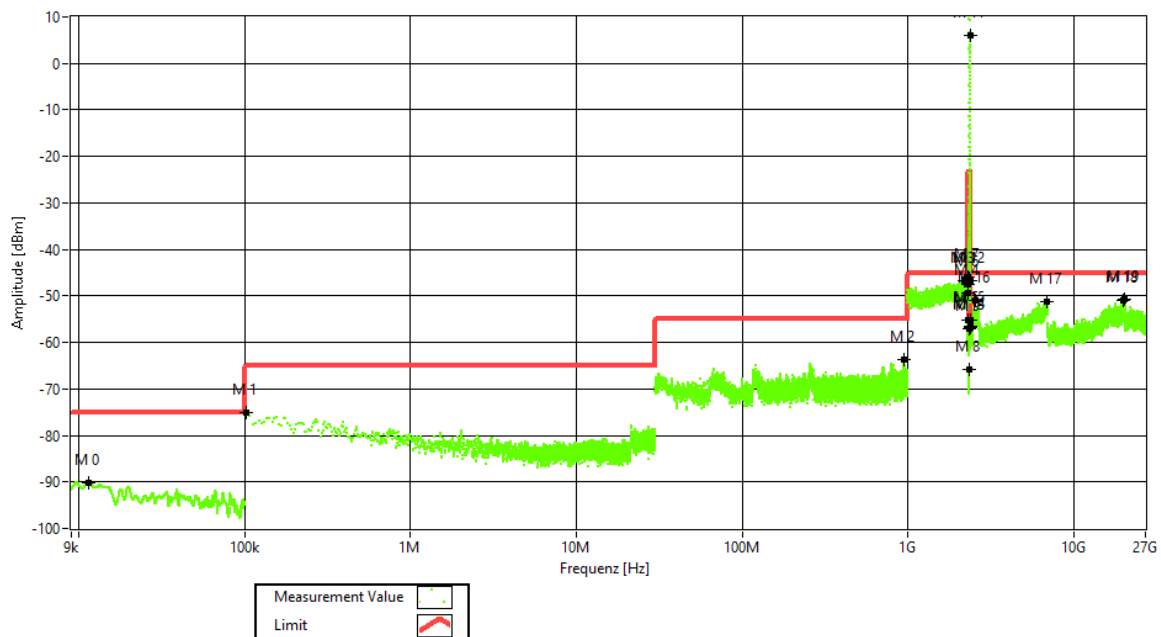




EMC Test Report No.: 23-0223


EMC tests on Andrew CAP M2 17E/19/23/25T [WCS 2300] F-AC-F1



Frequency Band = Band 30 WCS 2300, ANT 2, Test Frequency = low, Direction = RF downlink, Signal Type = AWGN10

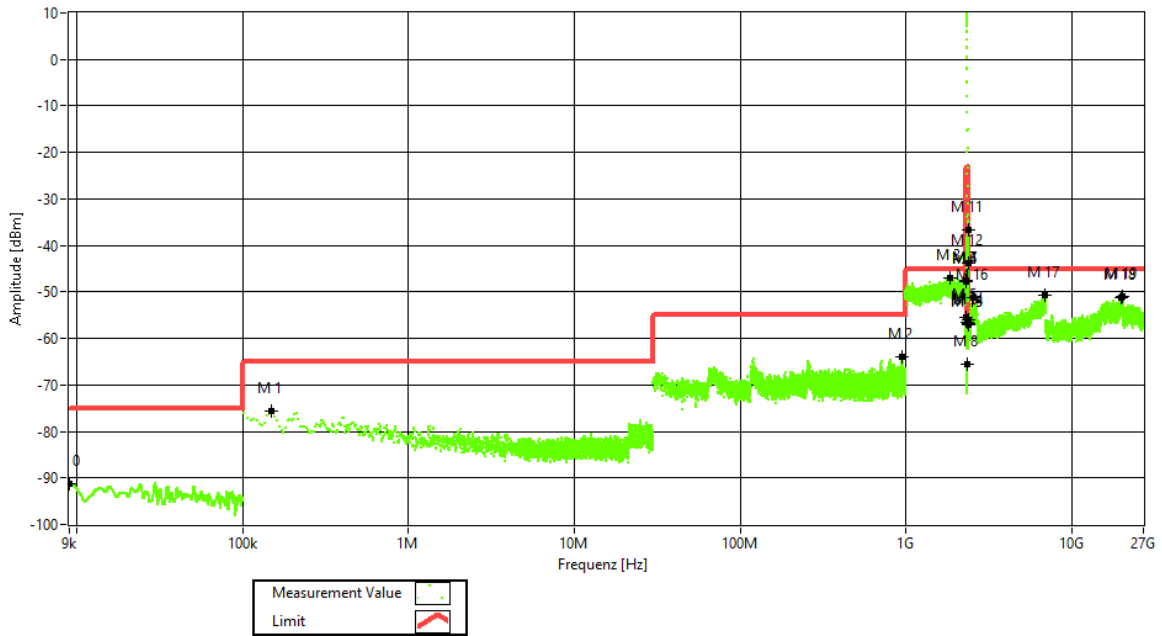

Frequency Band = Band 30 WCS 2300, ANT 2, Test Frequency = mid, Direction = RF downlink, Signal Type = AWGN10

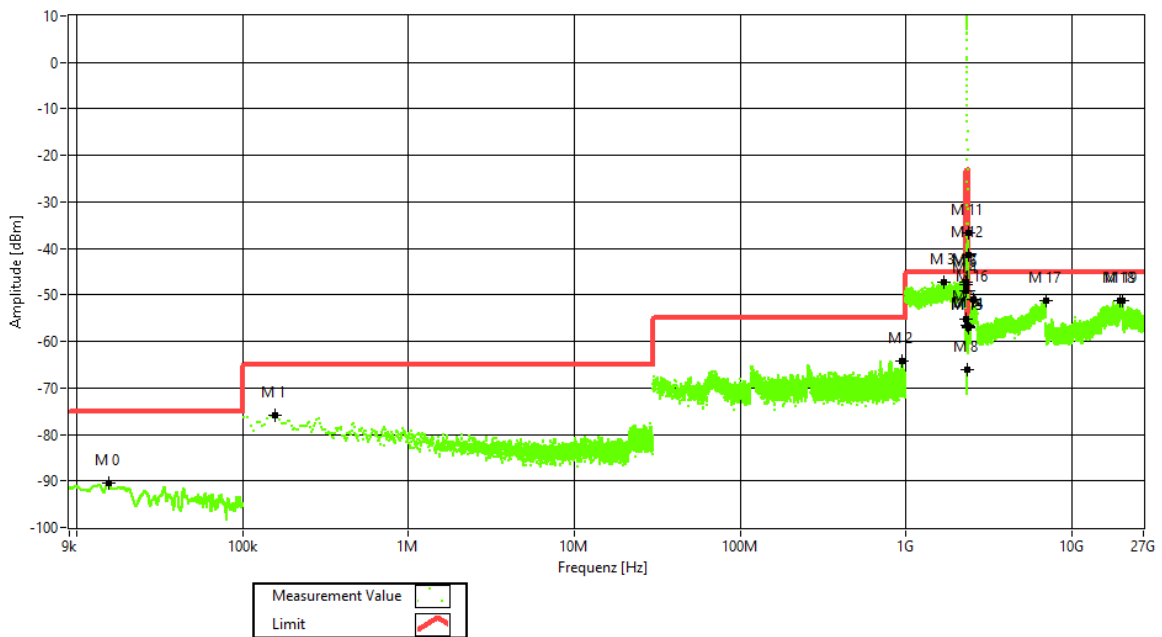




EMC Test Report No.: 23-0223

EMC tests on Andrew CAP M2 17E/19/23/25T [WCS 2300] F-AC-F1



Frequency Band = Band 30 WCS 2300, ANT 2, Test Frequency = high, Direction = RF downlink,
Signal Type = AWGN10

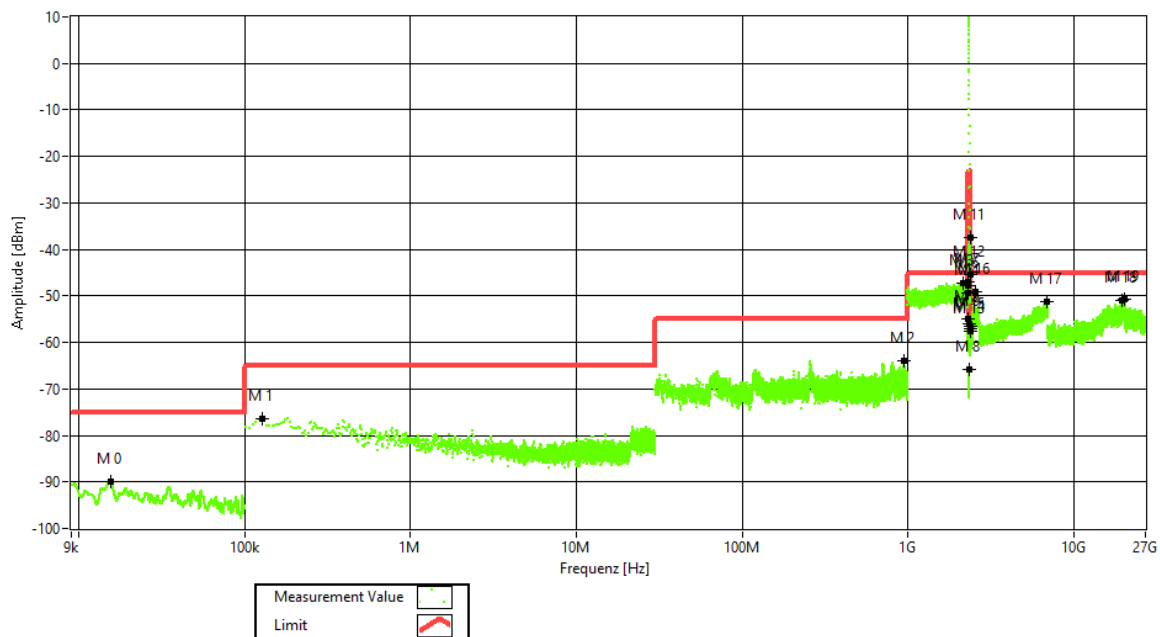




EMC Test Report No.: 23-0223


EMC tests on Andrew CAP M2 17E/19/23/25T [WCS 2300] F-AC-F1



Frequency Band = Band 30 WCS 2300 (LBS), ANT 2, Test Frequency = low, Direction = RF downlink,
Signal Type = Narrowband

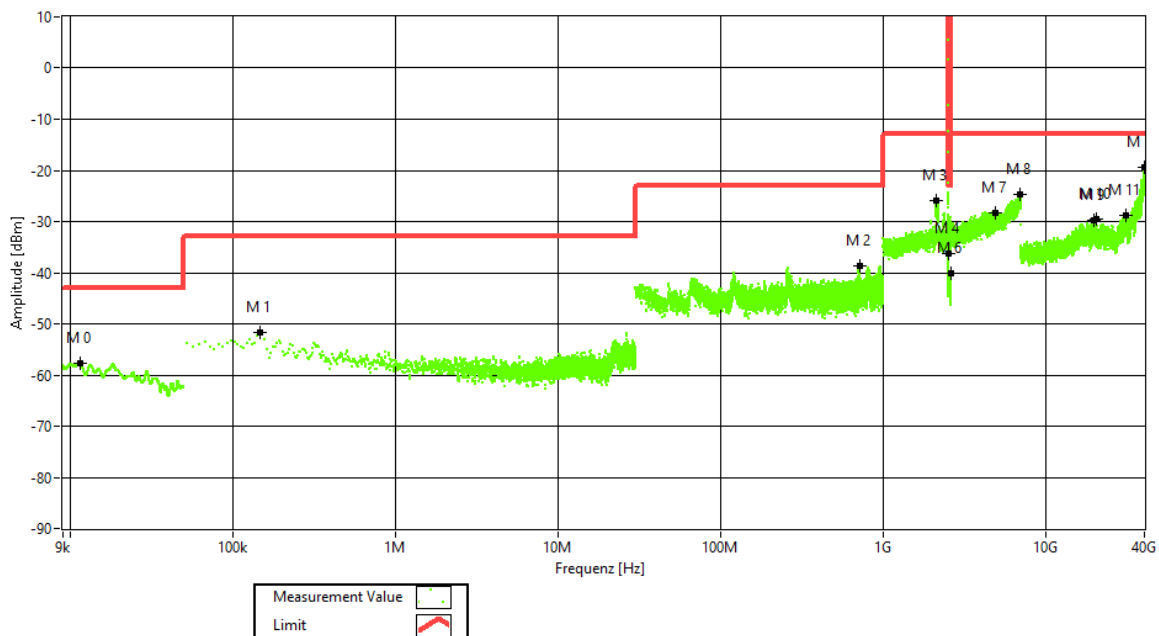

Frequency Band = Band 30 WCS 2300 (LBS), ANT 2, Test Frequency = mid, Direction = RF downlink,
Signal Type = Narrowband

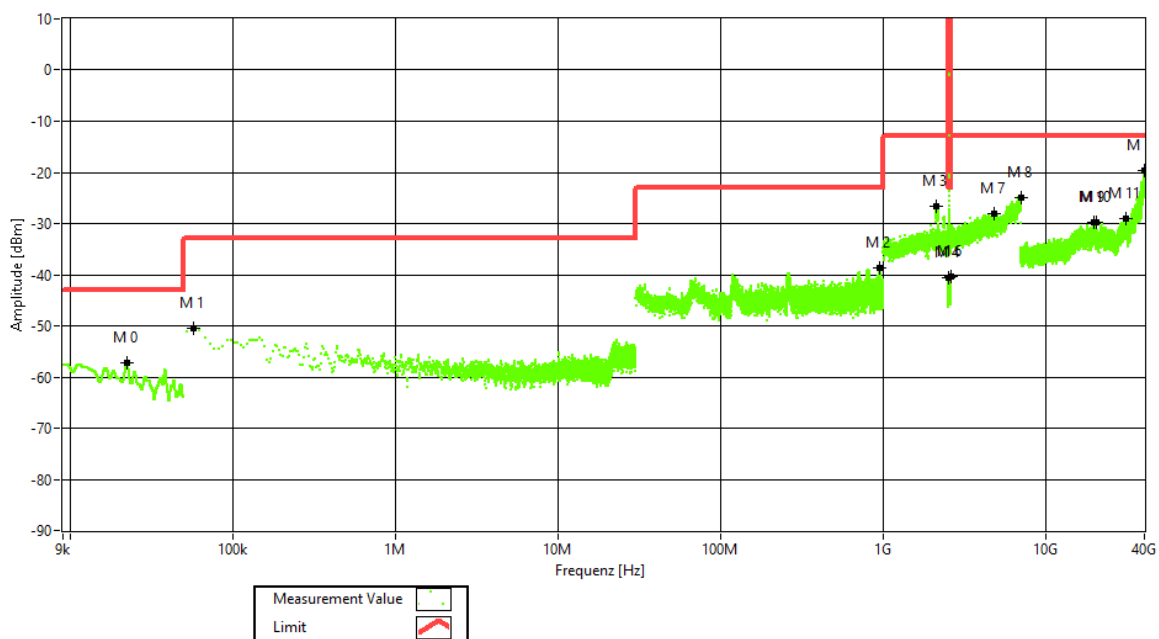




EMC Test Report No.: 23-0223

EMC tests on Andrew CAP M2 17E/19/23/25T [WCS 2300] F-AC-F1



Frequency Band = Band 30 WCS 2300 (LBS), ANT 2, Test Frequency = high, Direction = RF downlink,
Signal Type = Narrowband

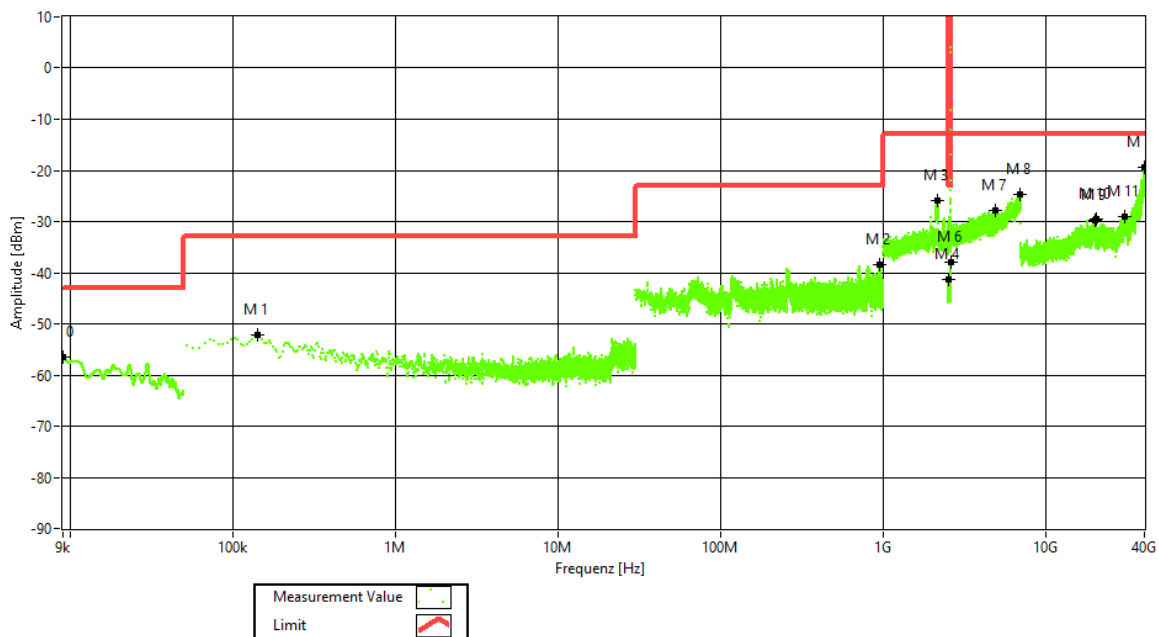




EMC Test Report No.: 23-0223


EMC tests on Andrew CAP M2 17E/19/23/25T [WCS 2300] F-AC-F1



Frequency Band = Band 30 WCS 2300 (LBS), ANT 2, Test Frequency = low, Direction = RF downlink,
Signal Type = AWGN

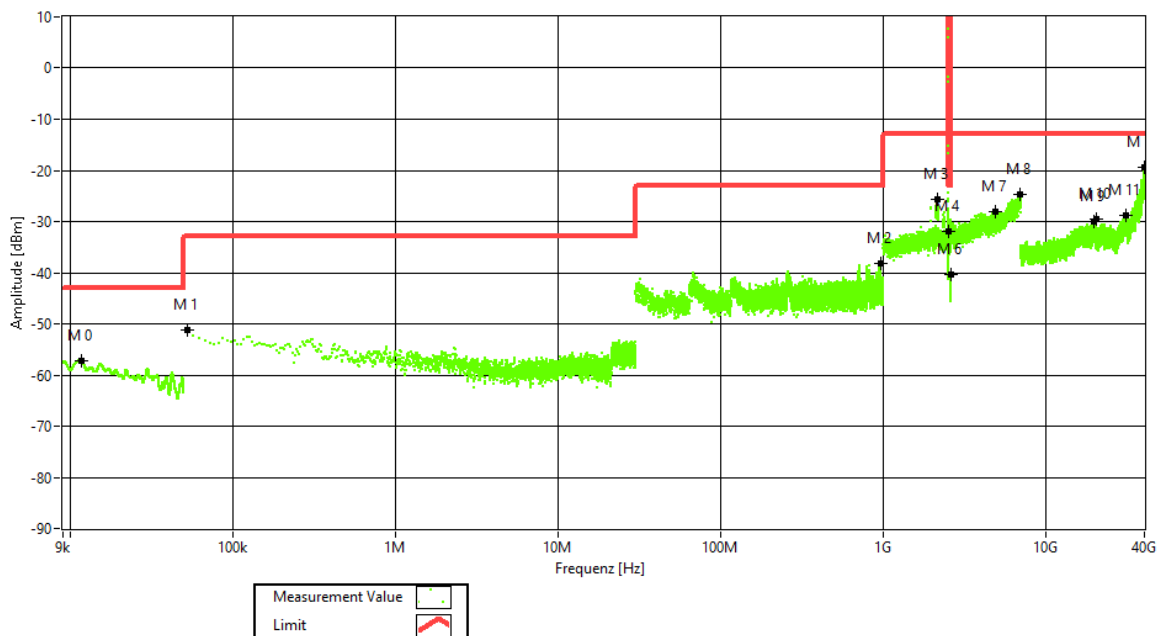

Frequency Band = Band 30 WCS 2300 (LBS), ANT 2, Test Frequency = mid, Direction = RF downlink,
Signal Type = AWGN

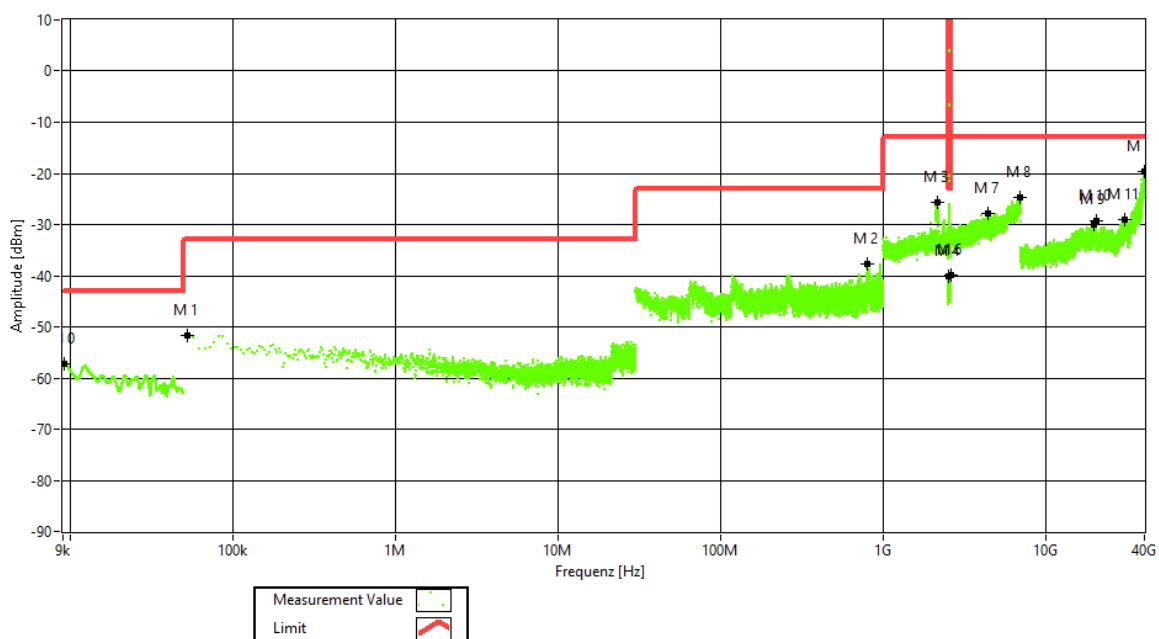




EMC Test Report No.: 23-0223

EMC tests on Andrew CAP M2 17E/19/23/25T [WCS 2300] F-AC-F1



Frequency Band = Band 30 WCS 2300 (LBS), ANT 2, Test Frequency = high, Direction = RF downlink,
Signal Type = AWGN

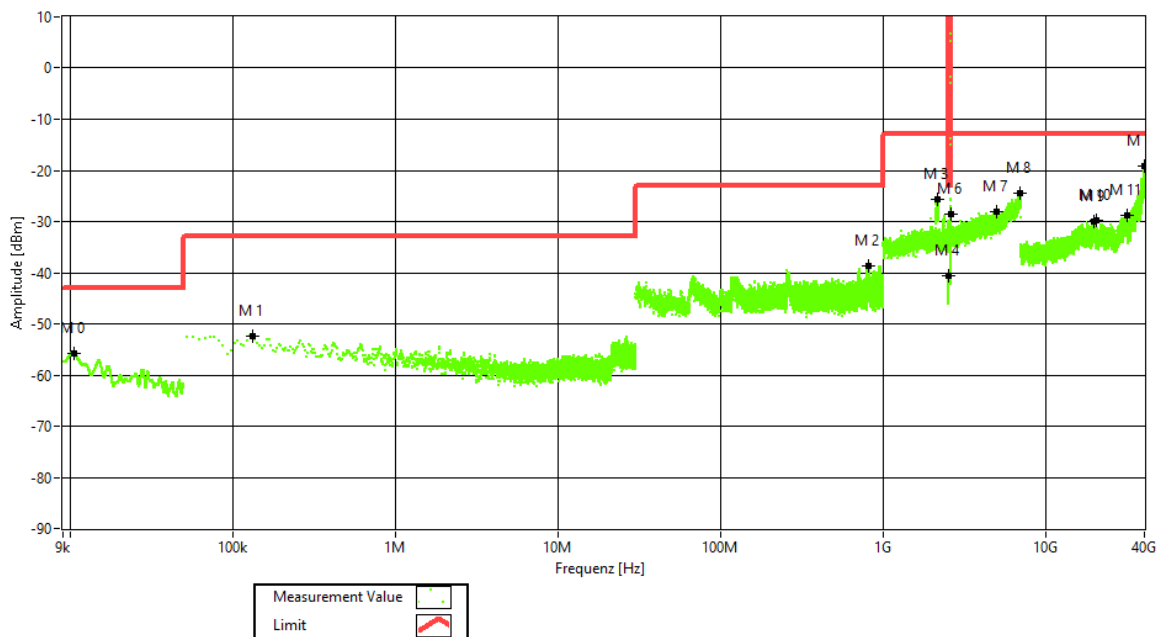




EMC Test Report No.: 23-0223


EMC tests on Andrew CAP M2 17E/19/23/25T [WCS 2300] F-AC-F1



Frequency Band = Band 30 WCS 2300 (LBS), ANT 2, Test Frequency = low, Direction = RF downlink,
Signal Type = AWGN100

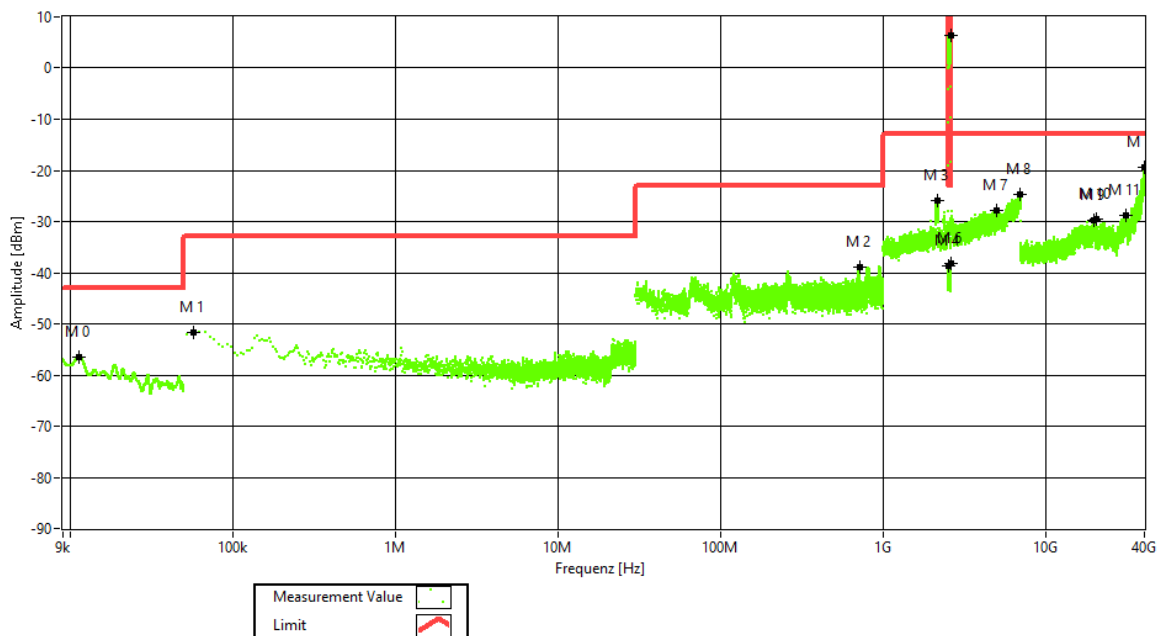

Frequency Band = Band 30 WCS 2300 (LBS), ANT 2, Test Frequency = mid, Direction = RF downlink,
Signal Type = AWGN100

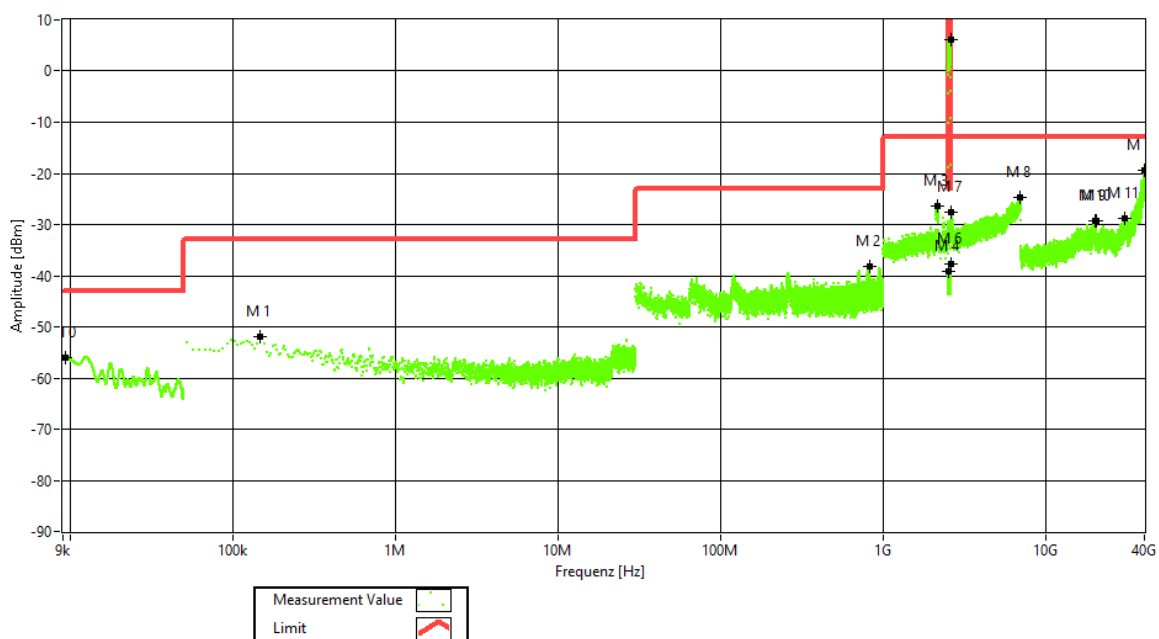




EMC Test Report No.: 23-0223

EMC tests on Andrew CAP M2 17E/19/23/25T [WCS 2300] F-AC-F1



Frequency Band = Band 30 WCS 2300 (LBS), ANT 2, Test Frequency = high, Direction = RF downlink,
Signal Type = AWGN100

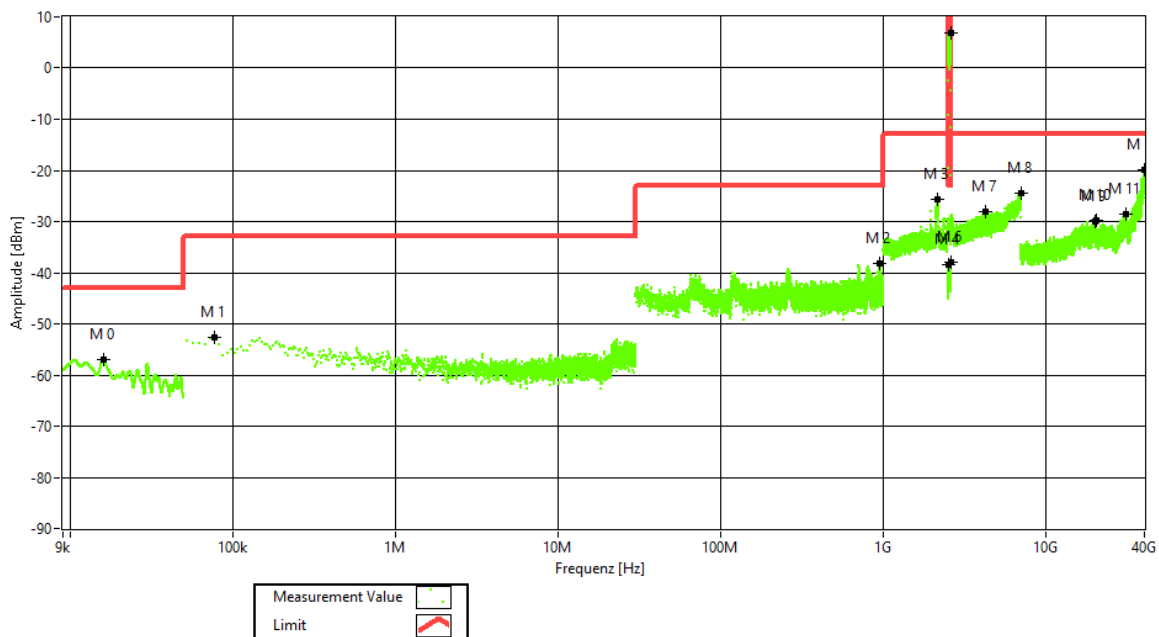



**BUREAU
VERITAS**

EMC Test Report No.: 23-0223

EMC tests on Andrew CAP M2 17E/19/23/25T [WCS 2300] F-AC-F1

4.4.5 TEST EQUIPMENT USED

- Conducted

EMC Test Report No.: 23-0223

EMC tests on Andrew CAP M2 17E/19/23/25T [WCS 2300] F-AC-F1

4.5 OUT-OF-BAND EMISSION LIMITS

Standard FCC Part § 2.1051, § 27.53

The test was performed according to:
ANSI C63.26, KDB 935210 D05 v01r04: 3.6

Test date: 2024-01-05


Environmental conditions: 23 °C ± 5 K; 40 % r. F. ± 20 % r. F.

Test engineer: Thomas Hufnagel

4.5.1 TEST DESCRIPTION

This test case is intended to demonstrate compliance to the out-of-band emission limit for industrial signal boosters. The limits itself come from the applicable rule part for each operating band.

The EUT was connected to the test setup according to the following diagram:

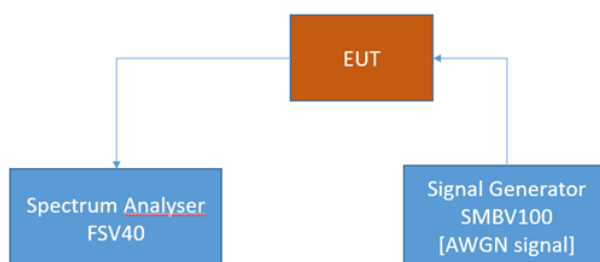

FCC Part 22/24/27/90 Industrial signal booster – Test Setup; Out-of-band emissions

The attenuation of the measuring and stimulus path are known for each measured frequency and are considered.

The Spectrum Analyser settings can be directly found in the measurement diagrams.



4.5.2 TEST REQUIREMENTS/LIMITS

Abstract § 2.1051 from FCC:

FCC Part 2.1051; Measurement required: Spurious emissions at antenna terminal:

The radio frequency voltage or powers generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of each harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in § 2.1049 as appropriate. The magnitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be specified.

Part 27; Miscellaneous Wireless Communication Services

Subpart C – Technical standards

§27.53 – Emission limits

Abstract § 27.53 FCC:

(a) For operations in the 2305-2320 MHz band and the 2345-2360 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power P (with averaging performed only during periods of transmission) within the licensed band(s) of operation, in watts, by the following amounts:

(1) For base and fixed stations' operations in the 2305-2320 MHz band and the 2345-2360 MHz band:

(i) By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2305 and 2320 MHz and on all frequencies between 2345 and 2360 MHz that are outside the licensed band(s) of operation, and not less than $75 + 10 \log (P)$ dB on all frequencies between 2320 and 2345 MHz;

(ii) By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2300 and 2305 MHz, $70 + 10 \log (P)$ dB on all frequencies between 2287.5 and 2300 MHz, $72 + 10 \log (P)$ dB on all frequencies between 2285 and 2287.5 MHz, and $75 + 10 \log (P)$ dB below 2285 MHz;

(iii) By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2360 and 2362.5 MHz, $55 + 10 \log (P)$ dB on all frequencies between 2362.5 and 2365 MHz, $70 + 10 \log (P)$ dB on all frequencies between 2365 and 2367.5 MHz, $72 + 10 \log (P)$ dB on all frequencies between 2367.5 and 2370 MHz, and $75 + 10 \log (P)$ dB above 2370 MHz.



EMC Test Report No.: 23-0223

EMC tests on Andrew CAP M2 17E/19/23/25T [WCS 2300] F-AC-F1

(2) For fixed customer premises equipment (CPE) stations operating in the 2305-2320 MHz band and the 2345-2360 MHz band transmitting with more than 2 watts per 5 megahertz average EIRP:

(i) By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2305 and 2320 MHz and on all frequencies between 2345 and 2360 MHz that are outside the licensed band(s) of operation, and not less than $75 + 10 \log (P)$ dB on all frequencies between 2320 and 2345 MHz;

(ii) By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2300 and 2305 MHz, $70 + 10 \log (P)$ dB on all frequencies between 2287.5 and 2300 MHz, $72 + 10 \log (P)$ dB on all frequencies between 2285 and 2287.5 MHz, and $75 + 10 \log (P)$ dB below 2285 MHz;

(iii) By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2360 and 2362.5 MHz, $55 + 10 \log (P)$ dB on all frequencies between 2362.5 and 2365 MHz, $70 + 10 \log (P)$ dB on all frequencies between 2365 and 2367.5 MHz, $72 + 10 \log (P)$ dB on all frequencies between 2367.5 and 2370 MHz, and $75 + 10 \log (P)$ dB above 2370 MHz.

(3) For fixed CPE stations operating in the 2305-2320 MHz and 2345-2360 MHz bands transmitting with 2 watts per 5 megahertz average EIRP or less:

(i) By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2305 and 2320 MHz and on all frequencies between 2345 and 2360 MHz that are outside the licensed band(s) of operation, not less than $55 + 10 \log (P)$ dB on all frequencies between 2320 and 2324 MHz and between 2341 and 2345 MHz, not less than $61 + 10 \log (P)$ dB on all frequencies between 2324 and 2328 MHz and between 2337 and 2341 MHz, and not less than $67 + 10 \log (P)$ dB on all frequencies between 2328 and 2337 MHz;

(ii) By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2300 and 2305 MHz, $55 + 10 \log (P)$ dB on all frequencies between 2296 and 2300 MHz, $61 + 10 \log (P)$ dB on all frequencies between 2292 and 2296 MHz, $67 + 10 \log (P)$ dB on all frequencies between 2288 and 2292 MHz, and $70 + 10 \log (P)$ dB below 2288 MHz;

(iii) By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2360 and 2365 MHz, and not less than $70 + 10 \log (P)$ dB above 2365 MHz.

4.5.3 TEST PROTOCOL

Band 30 WCS 2300, downlink, Number of input signals = 1							
Signal Type	Input Power	Band Edge	Signal Frequency [MHz]	Input Power [dBm]	Maximum Out-of-band Power [dBm]	Limit Out-of-band Power [dBm]	Margin to Limit [dB]
Wideband	0.3 dB < AGC	upper	2357.5	-4.5	-42.4	-13.0	29.4
Wideband	3 dB > AGC	upper	2357.5	-1.2	-42.6	-13.0	29.6
Wideband 5G	0.3 dB < AGC	upper	2355.0	-4.8	-38.4	-13.0	25.4
Wideband 5G	3 dB > AGC	upper	2355.0	-1.8	-38.2	-13.0	25.2
Narrowband	0.3 dB < AGC	upper	2359.8	-4.5	-28.6	-13.0	15.6
Narrowband	3 dB > AGC	upper	2359.8	-1.2	-29.0	-13.0	16.0
Wideband	0.3 dB < AGC	lower	2352.5	-4.3	-42.3	-13.0	29.3
Wideband	3 dB > AGC	lower	2352.5	-1.0	-41.7	-13.0	28.7
Wideband 5G	0.3 dB < AGC	lower	2355.0	-4.6	-38.4	-13.0	25.4
Wideband 5G	3 dB > AGC	lower	2355.0	-1.6	-38.0	-13.0	25.0
Narrowband	0.3 dB < AGC	lower	2350.2	-4.1	-28.8	-13.0	15.8
Narrowband	3 dB > AGC	lower	2350.2	-4.5	-42.4	-13.0	29.4

Band 30 WCS 2300, downlink, Number of input signals = 2								
Signal Type	Input Power	Band Edge	Signal Frequency f1 [MHz]	Signal Frequency f2 [MHz]	Input Power [dBm]	Maximum Out-of-band Power [dBm]	Limit Out-of-band Power [dBm]	Margin to Limit [dB]
Wideband	0.3 dB < AGC	upper	2357.5	2355.0	-4.3	-43.4	-13.0	30.4
Wideband	3 dB > AGC	upper	2357.5	2355.0	-1.0	-42.4	-13.0	29.4
Narrowband	0.3 dB < AGC	upper	2359.8	2359.6	-4.7	-31.9	-13.0	18.9
Narrowband	3 dB > AGC	upper	2359.8	2359.6	-1.4	-32.3	-13.0	19.3
Wideband	0.3 dB < AGC	lower	2352.5	2355.0	-4.5	-44.0	-13.0	31.0
Wideband	3 dB > AGC	lower	2352.5	2355.0	-1.2	-44.4	-13.0	31.4
Narrowband	0.3 dB < AGC	lower	2350.2	2350.4	-4.1	-32.2	-13.0	19.2
Narrowband	3 dB > AGC	lower	2350.2	2350.4	-0.8	-32.5	-13.0	19.5

Remark: Please see next sub-clause for the measurement plot.




EMC Test Report No.: 23-0223

EMC tests on Andrew CAP M2 17E/19/23/25T [WCS 2300] F-AC-F1


4.5.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")

Band: WCS ANT 2; Frequency: 2.3500 GHz to 2.3600 GHz; Band Edge: upper; Mod: AWGN;
Input Power = 0.3 dB < AGC; Number of signals 1

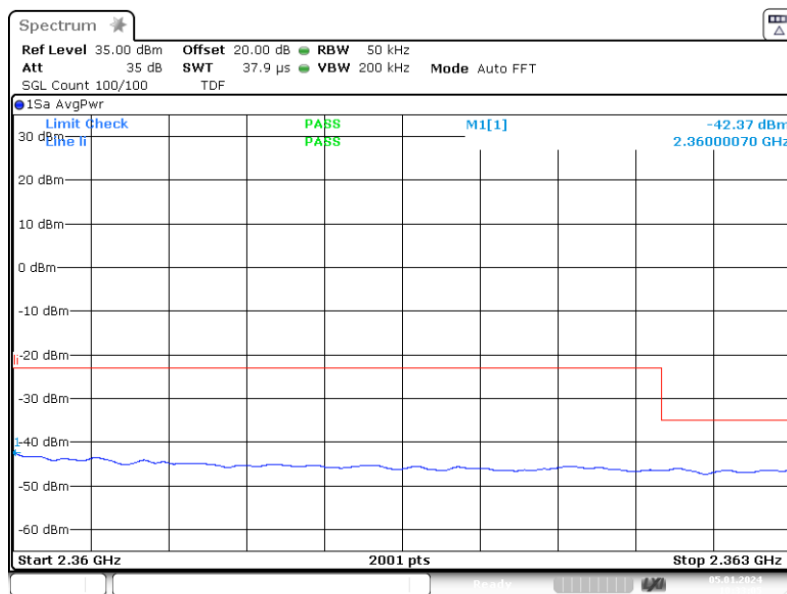

3.6.2 out of band emi WCS2300_R AWGN upper 1carrier +0.3 dB
2.360G 2.363G

Band: WCS ANT 2; Frequency: 2.3500 GHz to 2.3600 GHz; Band Edge: upper; Mod: AWGN;
Input Power = 3 dB > AGC; Number of signals 1

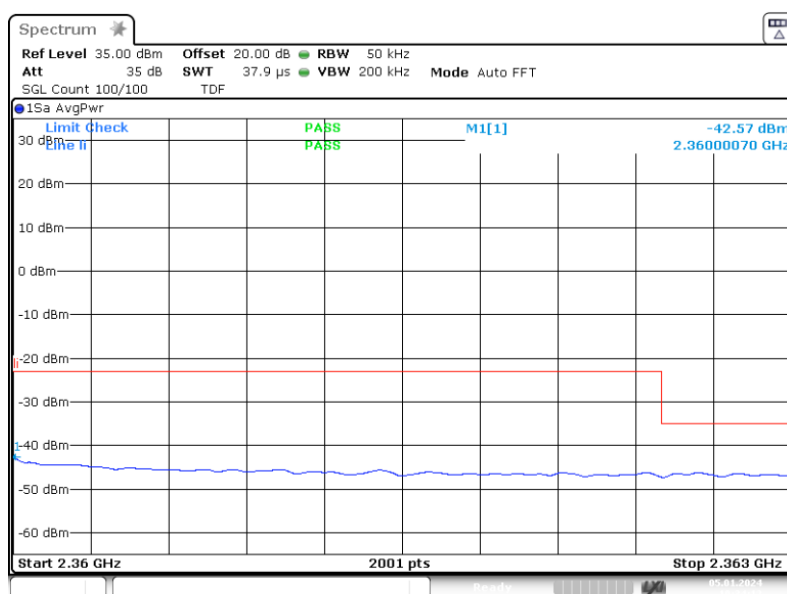


3.6.2 out of band emi WCS2300_R AWGN upper 1carrier +3.0 dB
2.360G 2.363G



EMC Test Report No.: 23-0223


EMC tests on Andrew CAP M2 17E/19/23/25T [WCS 2300] F-AC-F1

Band: WCS ANT 2; Frequency: 2.3500 GHz to 2.3600 GHz; Band Edge: upper; Mod: AWGN 10M; Input Power = 0.3 dB < AGC; Number of signals 1

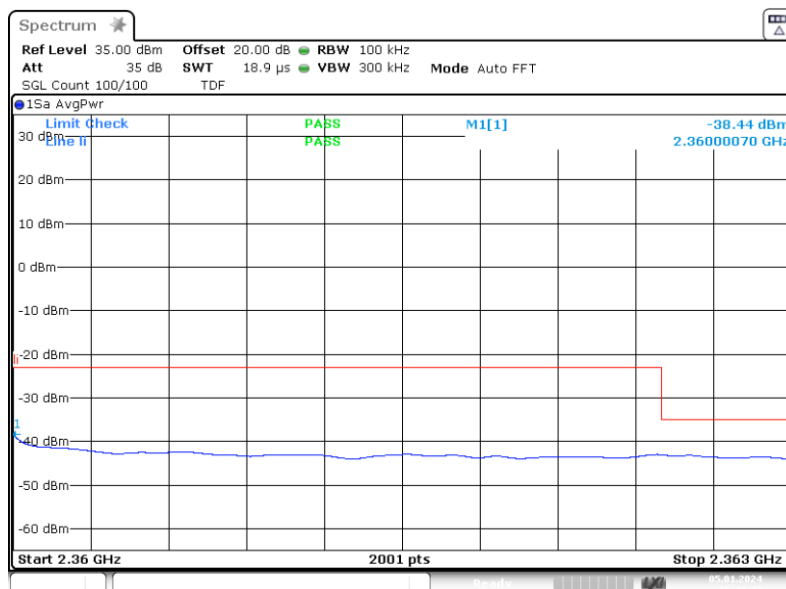

3.6.2 out of band emi WCS2300_R AWGN 10M upper lcarrier -0.3
dB 2.360G 2.363G

Band: WCS ANT 2; Frequency: 2.3500 GHz to 2.3600 GHz; Band Edge: upper; Mod: AWGN 10M; Input Power = 3 dB > AGC; Number of signals 1

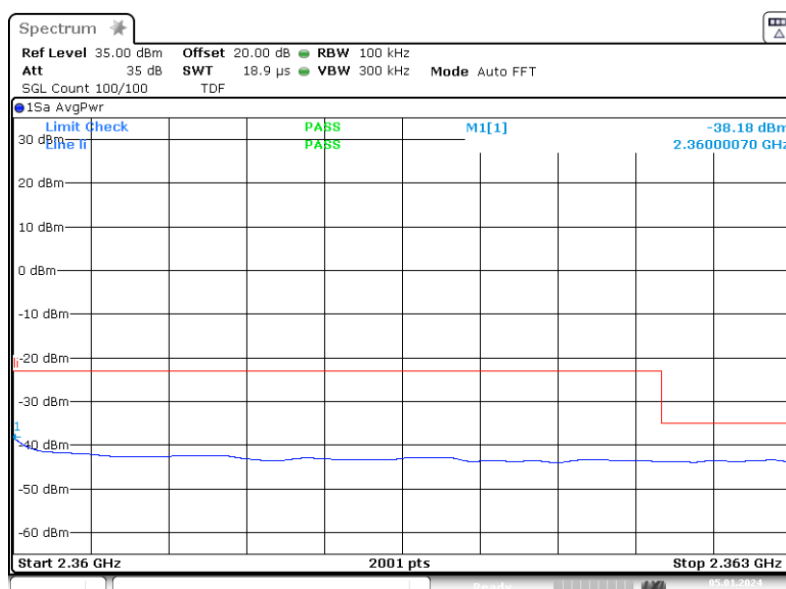


3.6.2 out of band emi WCS2300_R AWGN 10M upper lcarrier +3.0
dB 2.360G 2.363G




EMC Test Report No.: 23-0223

EMC tests on Andrew CAP M2 17E/19/23/25T [WCS 2300] F-AC-F1

Band: WCS ANT 2; Frequency: 2.3500 GHz to 2.3600 GHz; Band Edge: upper; Mod: GSM;
Input Power = 0.3 dB < AGC; Number of signals 1

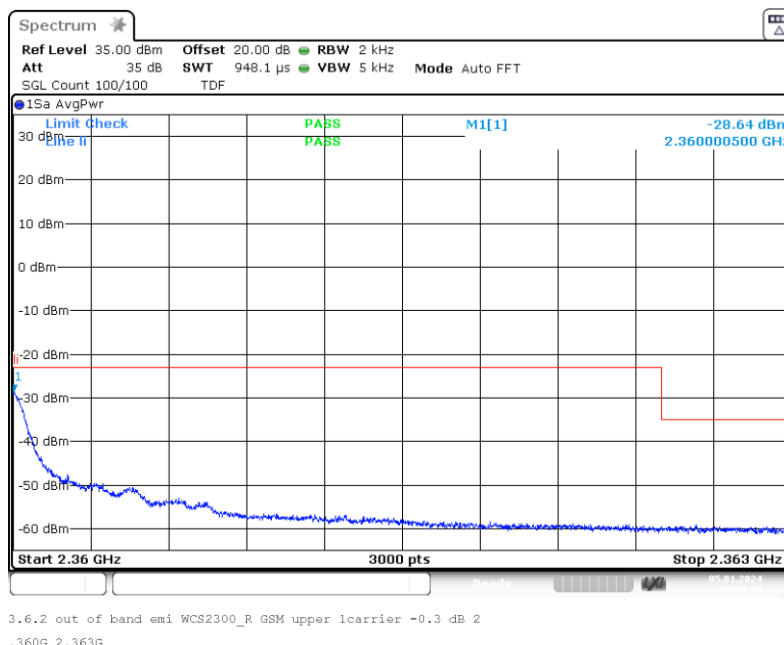

Band: WCS ANT 2; Frequency: 2.3500 GHz to 2.3600 GHz; Band Edge: upper; Mod: GSM;
Input Power = 3 dB > AGC; Number of signals 1

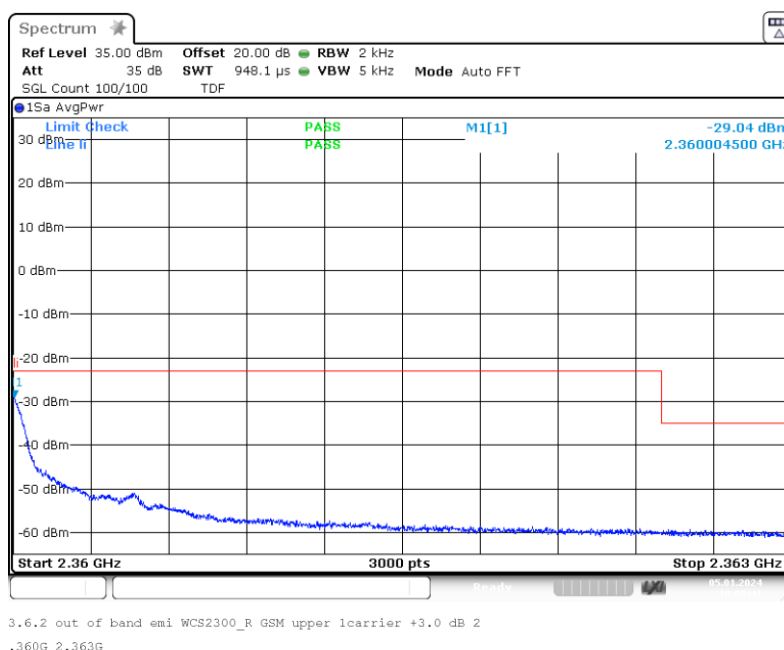




BUREAU
VERITAS


EMC Test Report No.: 23-0223

EMC tests on Andrew CAP M2 17E/19/23/25T [WCS 2300] F-AC-F1

Band: WCS ANT 2; Frequency: 2.3500 GHz to 2.3600 GHz; Band Edge: lower; Mod: AWGN;
Input Power = 0.3 dB < AGC; Number of signals 1

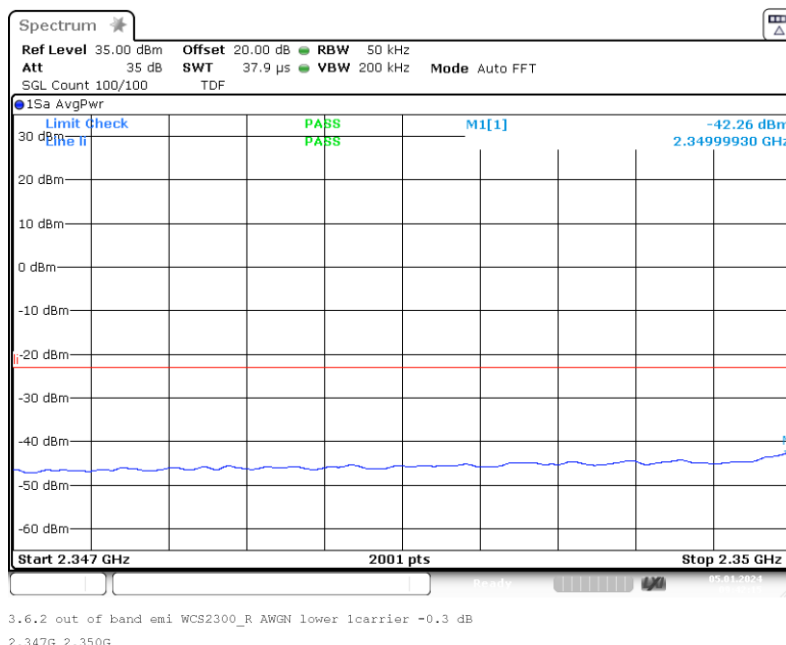

Band: WCS ANT 2; Frequency: 2.3500 GHz to 2.3600 GHz; Band Edge: lower; Mod: AWGN;
Input Power = 3 dB > AGC; Number of signals 1

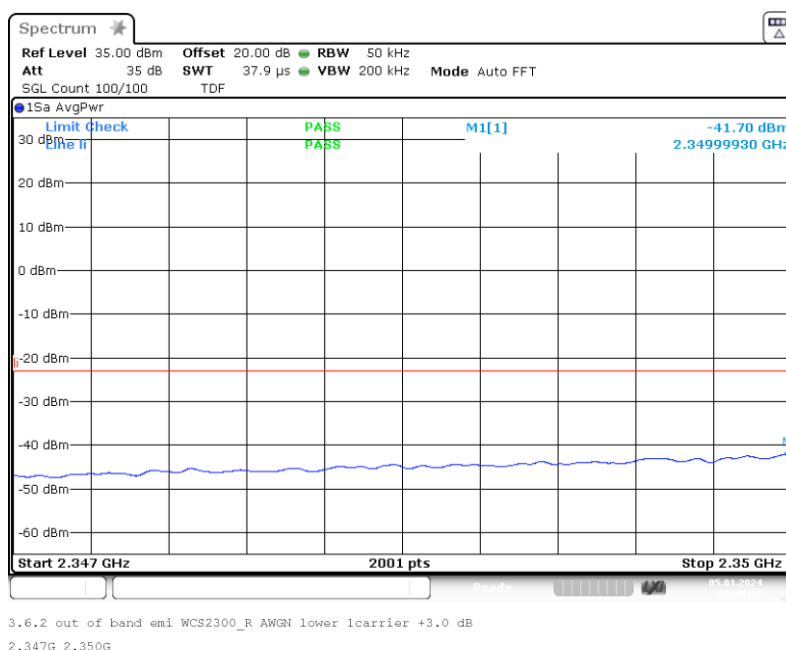




EMC Test Report No.: 23-0223


EMC tests on Andrew CAP M2 17E/19/23/25T [WCS 2300] F-AC-F1

Band: WCS ANT 2; Frequency: 2.3500 GHz to 2.3600 GHz; Band Edge: lower; Mod: AWGN 10M; Input Power = 0.3 dB < AGC; Number of signals 1

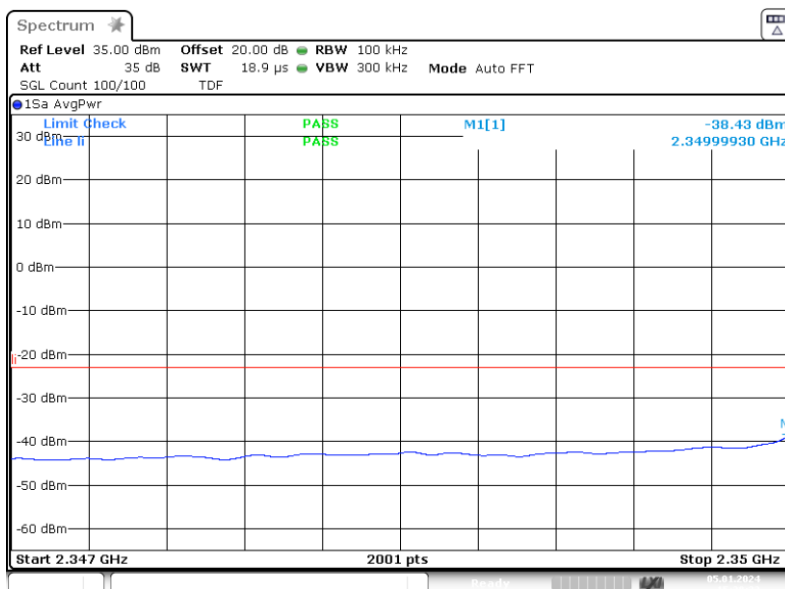

3.6.2 out of band emi WCS2300_R AWGN 10M lower lcarrier -0.3
dB 2.347G 2.350G

Band: WCS ANT 2; Frequency: 2.3500 GHz to 2.3600 GHz; Band Edge: lower; Mod: AWGN 10M; Input Power = 3 dB > AGC; Number of signals 1

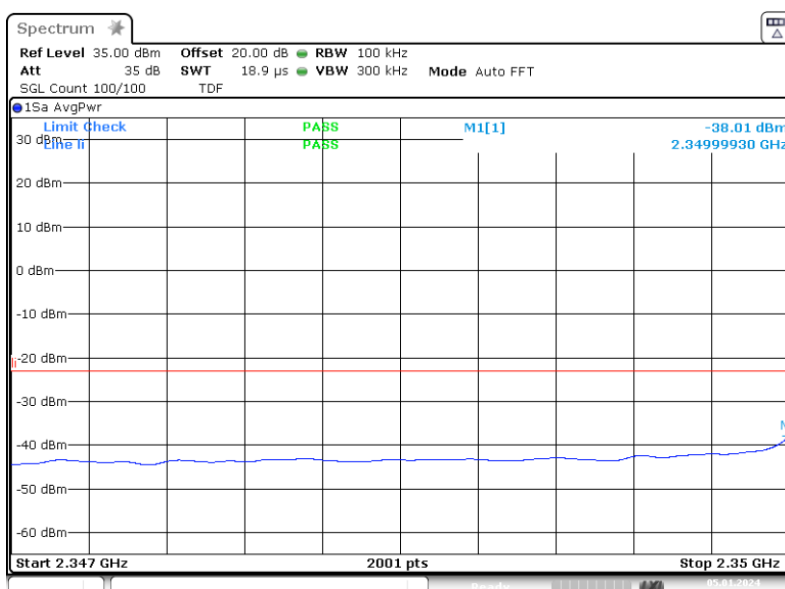

3.6.2 out of band emi WCS2300_R AWGN 10M lower lcarrier +3.0
dB 2.347G 2.350G




BUREAU
VERITAS


EMC Test Report No.: 23-0223

EMC tests on Andrew CAP M2 17E/19/23/25T [WCS 2300] F-AC-F1

Band: WCS ANT 2; Frequency: 2.3500 GHz to 2.3600 GHz; Band Edge: lower; Mod: GSM;
Input Power = 0.3 dB < AGC; Number of signals 1

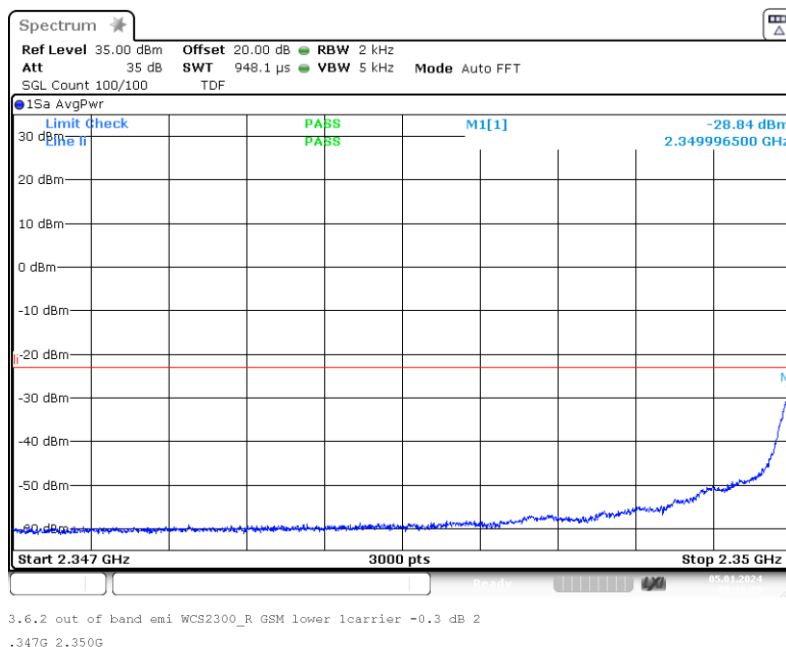

Band: WCS ANT 2; Frequency: 2.3500 GHz to 2.3600 GHz; Band Edge: lower; Mod: GSM;
Input Power = 3 dB > AGC; Number of signals 1

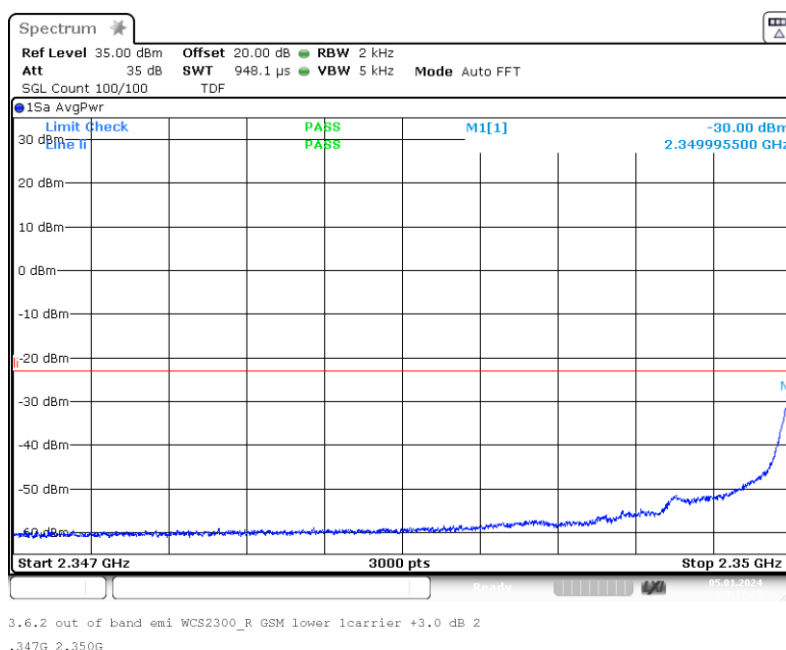




BUREAU
VERITAS


EMC Test Report No.: 23-0223

EMC tests on Andrew CAP M2 17E/19/23/25T [WCS 2300] F-AC-F1

Band: WCS ANT 2; Frequency: 2.3500 GHz to 2.3600 GHz; Band Edge: upper; Mod: AWGN;
Input Power = 0.3 dB < AGC; Number of signals 2

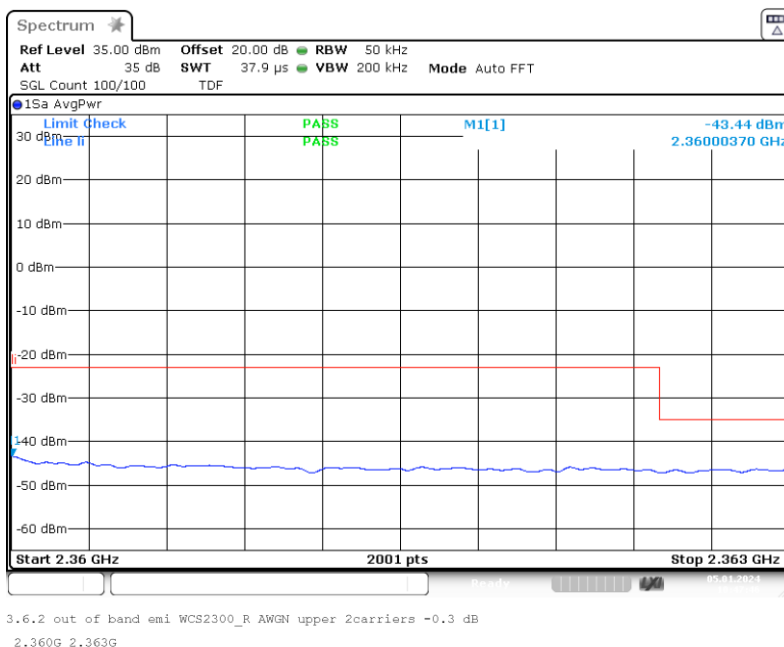

Band: WCS ANT 2; Frequency: 2.3500 GHz to 2.3600 GHz; Band Edge: upper; Mod: AWGN;
Input Power = 3 dB > AGC; Number of signals 2

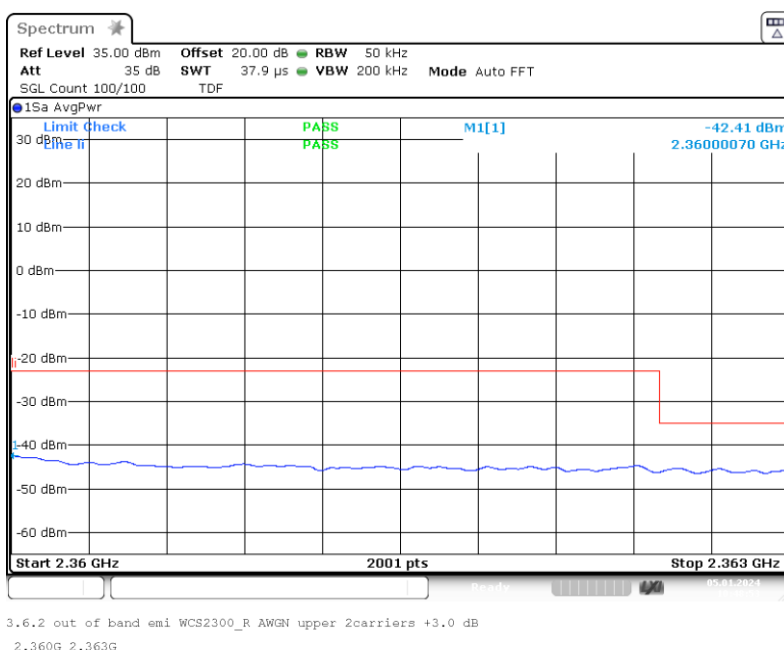





EMC Test Report No.: 23-0223

EMC tests on Andrew CAP M2 17E/19/23/25T [WCS 2300] F-AC-F1

Band: WCS ANT 2; Frequency: 2.3500 GHz to 2.3600 GHz; Band Edge: upper; Mod: GSM;
Input Power = 0.3 dB < AGC; Number of signals 2

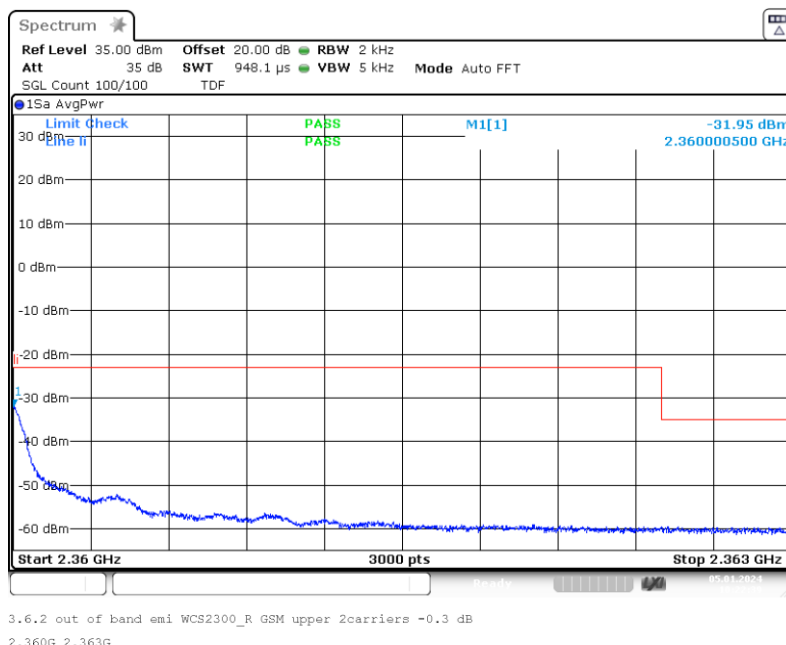

Band: WCS ANT 2; Frequency: 2.3500 GHz to 2.3600 GHz; Band Edge: upper; Mod: GSM;
Input Power = 3 dB > AGC; Number of signals 2

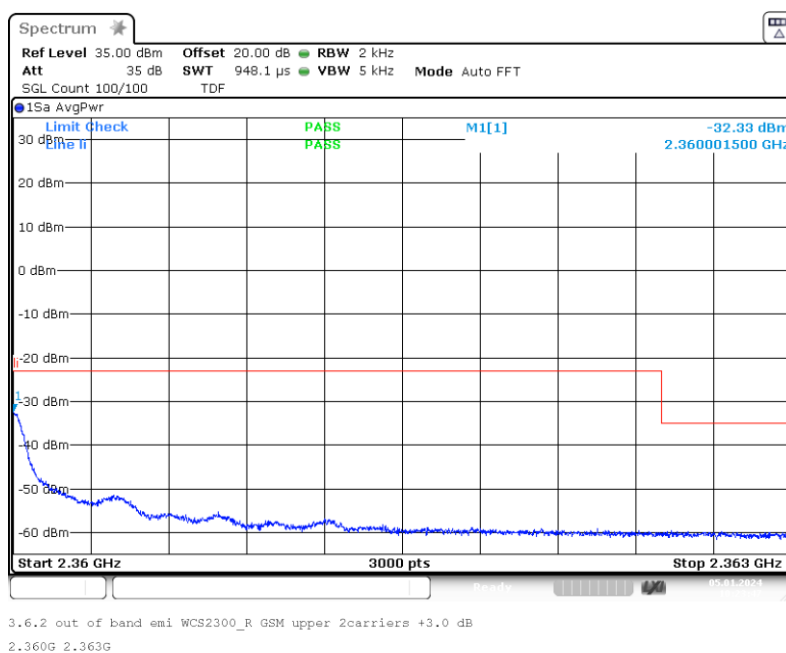




BUREAU
VERITAS


EMC Test Report No.: 23-0223

EMC tests on Andrew CAP M2 17E/19/23/25T [WCS 2300] F-AC-F1

Band: WCS ANT 2; Frequency: 2.3500 GHz to 2.3600 GHz; Band Edge: lower; Mod: AWGN;
Input Power = 0.3 dB < AGC; Number of signals 2

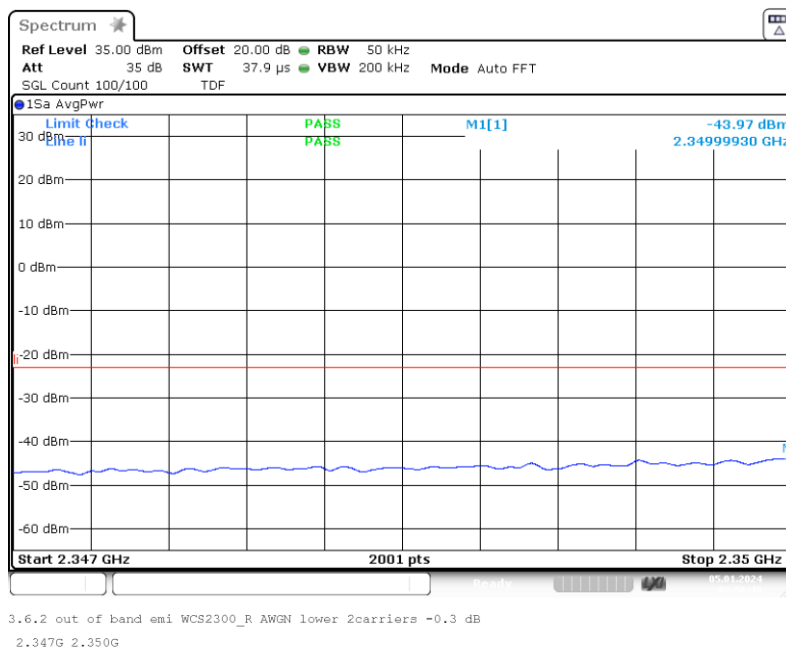

Band: WCS ANT 2; Frequency: 2.3500 GHz to 2.3600 GHz; Band Edge: lower; Mod: AWGN;
Input Power = 3 dB > AGC; Number of signals 2

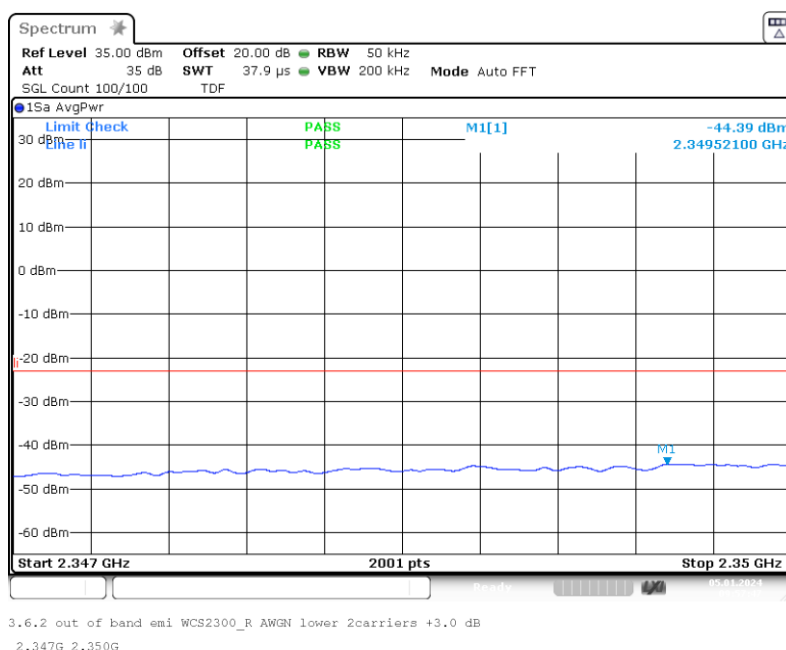



**BUREAU
VERITAS**

EMC Test Report No.: 23-0223

EMC tests on Andrew CAP M2 17E/19/23/25T [WCS 2300] F-AC-F1

4.5.5 TEST EQUIPMENT USED

- Conducted



EMC Test Report No.: 23-0223

EMC tests on Andrew CAP M2 17E/19/23/25T [WCS 2300] F-AC-F1

4.6 OUT-OF-BAND REJECTION

Standard KDB 935210 D05

The test was performed according to:

ANSI C63.26; KDB 935210 D05

Test date: 2023-11-20


Environmental conditions: 23 °C ± 5 K; 40 % r. F. ± 20 % r. F.

Test engineer: Thomas Hufnagel

4.6.1 TEST DESCRIPTION

This test case is intended to demonstrate compliance to the out-of-band rejection test case for industrial signal boosters.

The EUT was connected to the test setup according to the following diagram:

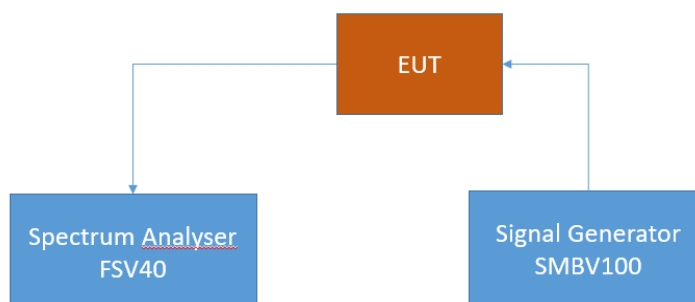

FCC Part 22/24/27/90 Industrial signal booster – Test Setup; Out-of-band rejection

The attenuation of the measuring and stimulus path are known for each measured frequency and are considered.

The Spectrum Analyzer settings can be directly found in the measurement diagrams.


4.6.2 TEST PROTOCOL

Band 30 WCS 2300, downlink				
Highest Power Frequency [MHz]	Output Power [dBm]	Lower Highest Power -20 dB Frequency [MHz]	Upper Highest Power -20 dB Frequency [MHz]	20 dB Bandwidth [MHz]
2357.60	21.13	2349.6925	2360.3125	10.620

Remark: Please see next sub-clause for the measurement plot.

4.6.3 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")

Frequency Band = WCS 2300, Direction = RF downlink

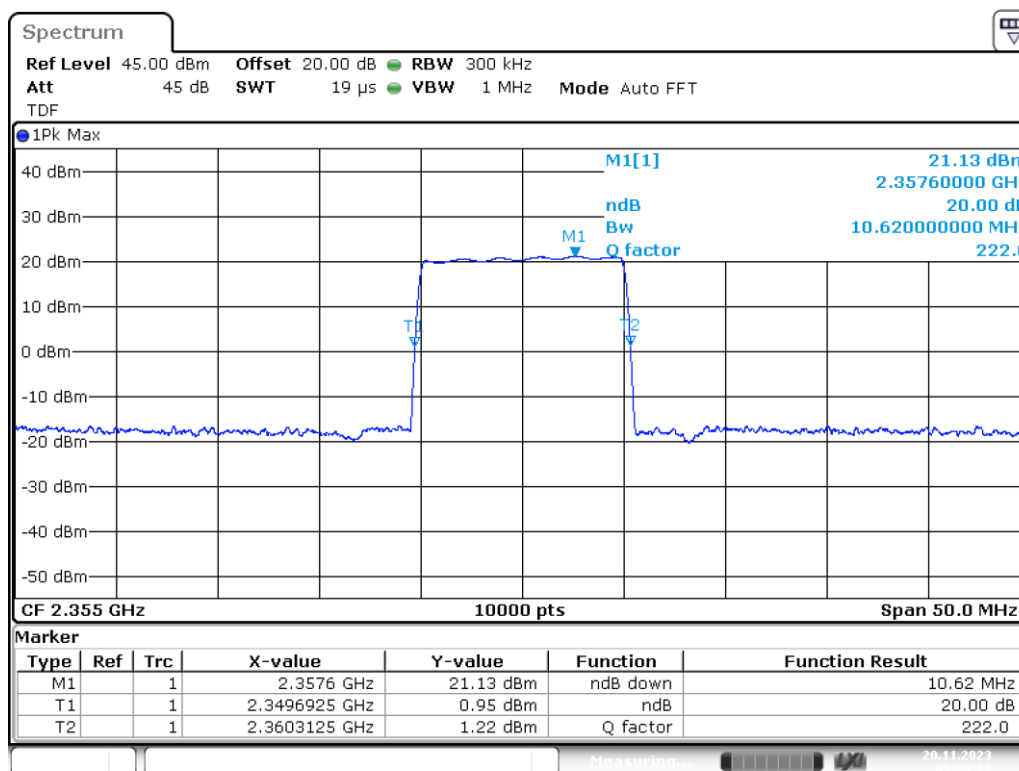

3.3 Out of band rejection WCS2300_R 2.35500G
_20dB

4.6.4 TEST EQUIPMENT USED

- Conducted



EMC Test Report No.: 23-0223

EMC tests on Andrew CAP M2 17E/19/23/25T [WCS 2300] F-AC-F1

4.7 FREQUENCY STABILITY

The frequency stability test case was not carried out, as any frequency errors are eliminated by the given system architecture. This is achieved by generating the LOs in the head-end station and the LOs in the remote unit with a common reference clock. This reference clock is transmitted from the head-end station to the remote unit and regenerated there. This means that the same reference frequency is used for all signal conversions (up- and down-conversion as well as analog-to-digital and digital-to-analog conversion) and any frequency error in the reference clock is compensated therefore. This is already clear from the measurement markings for the occupied bandwidth (26 dB bandwidth). It can be seen that the DUT has no influence on the frequency (comparison between input and output signal). In addition, it is operationally necessary for the frequency deviation to be significantly smaller than the spectral distance between the transmission bandwidth edge and the channel bandwidth edge in order to meet the signal quality requirement (signal purity) and such ensure that the fundamental emissions remain within the authorized bands of operation.

EMC Test Report No.: 23-0223

EMC tests on Andrew CAP M2 17E/19/23/25T [WCS 2300] F-AC-F1

4.8 FIELD STRENGTH OF SPURIOUS RADIATION

Standard FCC Part § 2.1053, § 27.53

The test was performed according to:
ANSI C63.26

Test date: 2023-11-02 to 2023-11-03


Environmental conditions: 23 °C ± 5 K; 40 % r. F. ± 20 % r. F.


Test engineer: Thomas Hufnagel

4.8.1 TEST DESCRIPTION

This test case is intended to demonstrate compliance to the applicable radiated spurious emission measurements.

The EUT was connected to the test setup according to the following diagram:

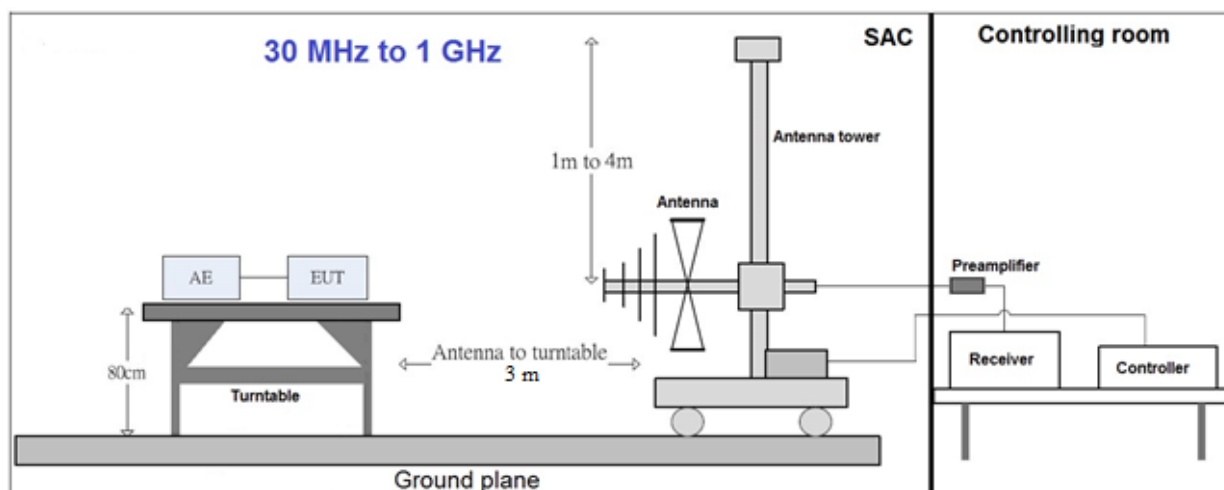

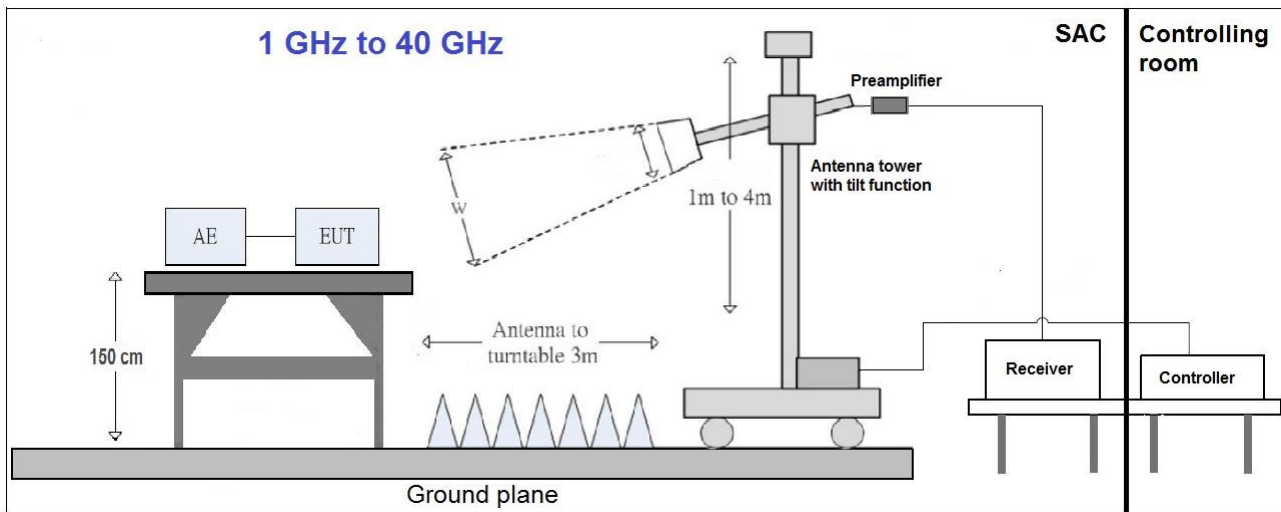

The test set-up was made in accordance to the general provisions of ANSI C63.4 in a typical installation configuration. The Equipment Under Test (EUT) was set up on a non-conductive table 1.5 x 1.5 m² in the semi-anechoic chamber, 0.8 meter above the ground or floor-standing arrangement shall be placed on the horizontal ground reference plane. The influence of the EUT support table that is used between 30–1000 MHz was evaluated. For the initial measurements, the receiving antenna is varied from 1-4 meter height and is changed in the vertical plane from vertical to horizontal polarization at each frequency. The highest emissions between 30 MHz to 1000 MHz were analyzed in details by operating the spectrum analyzer and/or EMI receiver in quasi-peak mode to determine the precise amplitude of the emissions.

The measurement procedure is implemented into the EMI test software BAT EMC from NEXIO. Exploratory tests are performed at 3 orthogonal axes to determine the worst-case orientation of a body-worn or handheld EUT. The final test on all kind of EUTs is also performed at 3 axes. A pre-check is performed while the EUT is powered by a DC power source. ?

1. Measurement above 30 MHz and up to 1 GHz

Step 1: Preliminary scan

This is a preliminary test to identify the highest amplitudes relative to the limit.

Settings for step 1:

- Antenna distance: 10 m
- Detector: Peak-Maxhold/RMS (FFT-based)
- Frequency range: 30 – 1000 MHz
- Frequency steps: 30 kHz
- IF-Bandwidth: 120 kHz
- Measuring time/Frequency step: 5 ms
- Turntable angle range: -180° to 180°
- Turntable step size: 30°
- Height variation range: 1 – 4 m
- Height variation step size: 1 m
- Polarisation: Horizontal + Vertical

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

Step 2: Adjustment measurement

In this step the accuracy of the turntable azimuth and antenna height will be improved. This is necessary to find out the maximum value of every frequency.

For each frequency, which was determined the turntable azimuth and antenna height will be adjusted. The turntable azimuth will slowly vary by $\pm 45^\circ$ around this value. During this action, the value of emission is continuously measured. The turntable azimuth at the highest emission will be recorded and adjusted. In this position, the antenna height will also slowly vary by ± 100 cm around the antenna height determined. During this action, the value of emission is also continuously measured. The antenna height of the highest emission will also be recorded and adjusted.

- Detector: Peak – Maxhold; RMS
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range: $\pm 30^\circ$ around the determined value
- Antenna Polarisation: max. value determined in step 1

Step 3: Final measurement with QP detector

With the settings determined in step 3, the final measurement will be performed:

EMI receiver settings for step 4:

- Detector: Quasi-Peak (< 1 GHz); RMS; Peak
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 1 s

After the measurement a plot will be generated which contains a diagram with the results of the preliminary scan and a chart with the frequencies and values of the results of the final measurement.

3. Measurement above 1 GHz

The following modifications apply to the measurement procedure for the frequency range above 1 GHz:

Step 1:

The Equipment Under Test (EUT) was set up on a non-conductive support at 1.5 m height in the semi-anechoic chamber. Absorbers are placed around and between the turn table and the antenna tower.

All steps were performed with one height (1.5 m) of the receiving antenna only.

The EUT is turned during the preliminary measurement across the elevation axis, with a step size of 30° .

The turn table step size (azimuth angle) for the preliminary measurement is 15° .

Step 2:

The maximum RFI field strength was determined during the measurement by rotating the turntable (± 180 degrees) and varying the height of the receive antenna ($h = 1 \dots 4$ m) with an additional tilt function of the antenna. The turn table azimuth will slowly vary by $\pm 15^\circ$.

EMI receiver settings (for all steps):

- Detector: Peak, Average
- IF Bandwidth = 1 MHz



EMC Test Report No.: 23-0223

EMC tests on Andrew CAP M2 17E/19/23/25T [WCS 2300] F-AC-F1

Step 3:

Spectrum analyser settings for step 3:

- Detector: Peak/Average
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 1 MHz
- Measuring time: 1 s

Remarks to the measurement in the frequency range between 1 GHz and 18 GHz:

In this range for noise reduction it was necessary to bring the antenna into a distance of 1 m to the test table with the DUT.

This also means that the height scan in this range is between 1.33 m for the lowest position and 2.33 m in the highest positions: This equates to the same scan range of the DUT as in 3 m antenna distance to the DUT and a height variation between 1 m and 4 m.



4.8.2 TEST REQUIREMENTS/LIMITS

Abstract from FCC Part § 2.1053:

FCC Part 2.1053; Measurement required: Field strength of spurious radiation:

Measurements shall be made to detect spurious emissions that may be radiated directly from the cabinet, control circuits, power leads, or intermediate circuit elements under normal conditions of installation and operation. Curves or equivalent data shall be supplied showing the magnitude of each harmonic and other spurious emission. For this test, single sideband, independent sideband, and controlled carrier transmitters shall be modulated under the conditions specified in paragraph (c) of § 2.1049, as appropriate.

Part 27; Miscellaneous Wireless Communication Services

Subpart C – Technical standards

§27.53 – Emission limits

Abstract § 27.53 FCC:

(a) For operations in the 2305-2320 MHz band and the 2345-2360 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power P (with averaging performed only during periods of transmission) within the licensed band(s) of operation, in watts, by the following amounts:

(1) For base and fixed stations' operations in the 2305-2320 MHz band and the 2345-2360 MHz band:

(i) By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2305 and 2320 MHz and on all frequencies between 2345 and 2360 MHz that are outside the licensed band(s) of operation, and not less than $75 + 10 \log (P)$ dB on all frequencies between 2320 and 2345 MHz;

(ii) By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2300 and 2305 MHz, $70 + 10 \log (P)$ dB on all frequencies between 2287.5 and 2300 MHz, $72 + 10 \log (P)$ dB on all frequencies between 2285 and 2287.5 MHz, and $75 + 10 \log (P)$ dB below 2285 MHz;

(iii) By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2360 and 2362.5 MHz, $55 + 10 \log (P)$ dB on all frequencies between 2362.5 and 2365 MHz, $70 + 10 \log (P)$ dB on all frequencies between 2365 and 2367.5 MHz, $72 + 10 \log (P)$ dB on all frequencies between 2367.5 and 2370 MHz, and $75 + 10 \log (P)$ dB above 2370 MHz.

(2) For fixed customer premises equipment (CPE) stations operating in the 2305-2320 MHz band and the 2345-2360 MHz band transmitting with more than 2 watts per 5 megahertz average EIRP:



EMC Test Report No.: 23-0223

EMC tests on Andrew CAP M2 17E/19/23/25T [WCS 2300] F-AC-F1



- (i) By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2305 and 2320 MHz and on all frequencies between 2345 and 2360 MHz that are outside the licensed band(s) of operation, and not less than $75 + 10 \log (P)$ dB on all frequencies between 2320 and 2345 MHz;
- (ii) By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2300 and 2305 MHz, $70 + 10 \log (P)$ dB on all frequencies between 2287.5 and 2300 MHz, $72 + 10 \log (P)$ dB on all frequencies between 2285 and 2287.5 MHz, and $75 + 10 \log (P)$ dB below 2285 MHz;
- (iii) By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2360 and 2362.5 MHz, $55 + 10 \log (P)$ dB on all frequencies between 2362.5 and 2365 MHz, $70 + 10 \log (P)$ dB on all frequencies between 2365 and 2367.5 MHz, $72 + 10 \log (P)$ dB on all frequencies between 2367.5 and 2370 MHz, and $75 + 10 \log (P)$ dB above 2370 MHz.
- (3) For fixed CPE stations operating in the 2305-2320 MHz and 2345-2360 MHz bands transmitting with 2 watts per 5 megahertz average EIRP or less:
- (i) By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2305 and 2320 MHz and on all frequencies between 2345 and 2360 MHz that are outside the licensed band(s) of operation, not less than $55 + 10 \log (P)$ dB on all frequencies between 2320 and 2324 MHz and between 2341 and 2345 MHz, not less than $61 + 10 \log (P)$ dB on all frequencies between 2324 and 2328 MHz and between 2337 and 2341 MHz, and not less than $67 + 10 \log (P)$ dB on all frequencies between 2328 and 2337 MHz;
- (ii) By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2300 and 2305 MHz, $55 + 10 \log (P)$ dB on all frequencies between 2296 and 2300 MHz, $61 + 10 \log (P)$ dB on all frequencies between 2292 and 2296 MHz, $67 + 10 \log (P)$ dB on all frequencies between 2288 and 2292 MHz, and $70 + 10 \log (P)$ dB below 2288 MHz;
- (iii) By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2360 and 2365 MHz, and not less than $70 + 10 \log (P)$ dB above 2365 MHz.



EMC Test Report No.: 23-0223

EMC tests on Andrew CAP M2 17E/19/23/25T [WCS 2300] F-AC-F1

4.8.3 TEST PROTOCOL

General considerations concerning the limits:

The measuring bandwidth of 1 MHz was chosen according the test requirements except at the bands from 30 MHz to 1 GHz: At these bands reducing of measurement bandwidth was done.

Also outside the downlink frequency band at lower frequencies the measurement bandwidths were reduced to have the possibility to record the spurious emissions at these lower frequencies.

At frequencies where measuring bandwidths were reduced also the limit lines were reduced according the given formula:

$$p_{RBWreduced} [dBm] = 10 * \log \left(RBWreduced [kHz] - 1000 kHz \right) + p_{RBW 1000 kHz} [dBm]$$

Hereby "p" are the limit lines' values.

Considerations to MIMO operation:

At this test the two output ports ANT 1 and ANT 2 are together in function according KDB 935210 D02 v04r02 chapter II (o) (2).

Measurement tables (showing the highest value. "worst case") with one antenna

At this tables the highest peak value of spurious radiation per frequency test band is shown.

Band 30 WCS 2300, downlink;						
Spurious Freq. [MHz]	Spurious Level [dBm]	Pin [dBm]	Detector	RBW [kHz]	Limit [dBm]	Margin to Limit [dB]
271.3/hor..	-63.1	-4.3	RMS	100	-55.0	8.1
273.1/vert.	-64.9	-4.3	RMS	100	-55.0	9.9
17271.4/hor.	-53.5	-4.3	RMS	1000	-45.0	8.5
17258.1/ver.	-50.6	-4.3	RMS	1000	-45.0	5.6
26653.5/hor.	-65.9	-4.3	RMS	1000	-45.0	20.9
26633.4/vert.	-65.3	-4.3	RMS	1000	-45.0	20.3

Measurement tables (showing the highest value. "worst case") with two antennas (MIMO)

At this tables the highest peak value of spurious radiation per frequency test band is shown.

Band 30 WCS 2300, downlink;						
Spurious Freq. [MHz]	Spurious Level [dBm]	Pin [dBm]	Detector	RBW [kHz]	Limit [dBm]	Margin to Limit [dB]
271.6/hor..	-63.6	-4.3	RMS	100	-55.0	8.6
271.0/vert.	-62.3	-4.3	RMS	100	-55.0	7.3
17240.5/hor.	-53.3	-4.3	RMS	1000	-45.0	8.3
17259.3/ver.	-53.8	-4.3	RMS	1000	-45.0	8.8
26646.0/hor.	-65.6	-4.3	RMS	1000	-45.0	20.6
26653.5/vert.	-65.2	-4.3	RMS	1000	-45.0	20.2

Abbreviations:

Hor.: horizontal position

Vert.: vertical position

Remark: Please see next sub-clause for the measurement plot.



EMC Test Report No.: 23-0223


EMC tests on Andrew CAP M2 17E/19/23/25T [WCS 2300] F-AC-F1




4.8.4 MEASUREMENT PLOTS (SHOWING THE HIGHEST VALUE. "WORST CASE") WITH ONE ANTENNA

4.8.4.1 Frequency Band = Band WCS 2300, ANT 2. Direction = RF Downlink

30 MHz - 1 GHz, horizontal

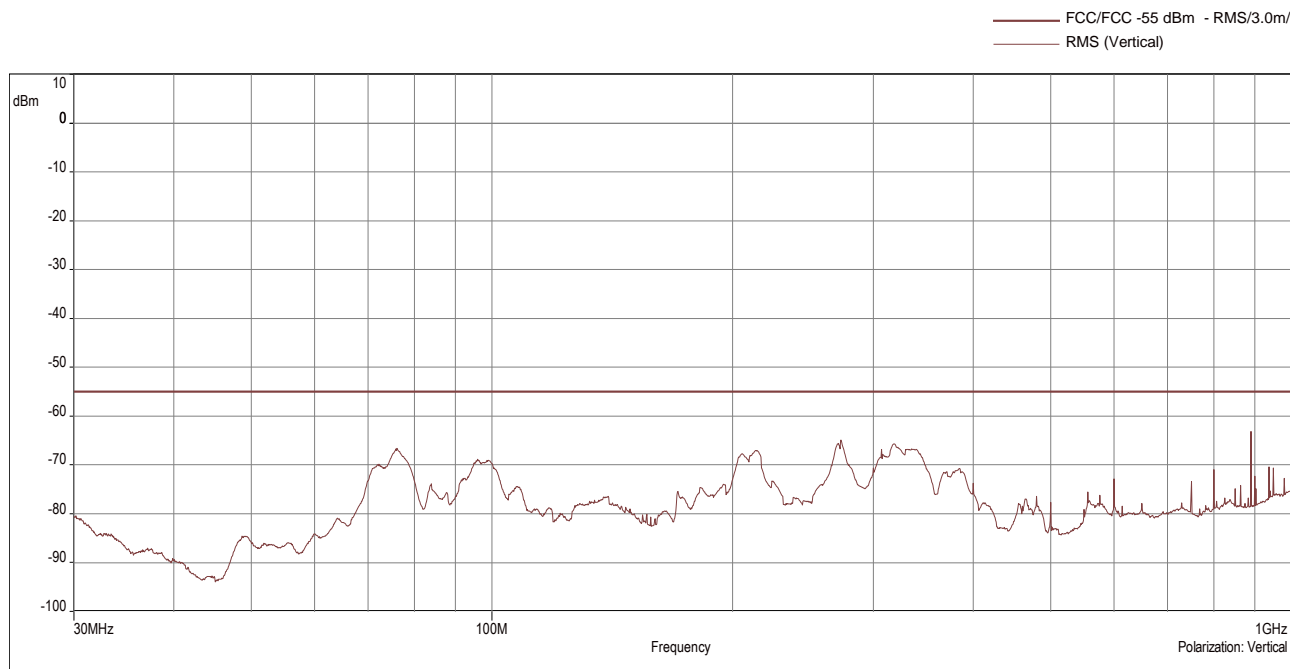

30 MHz - 1 GHz, vertical

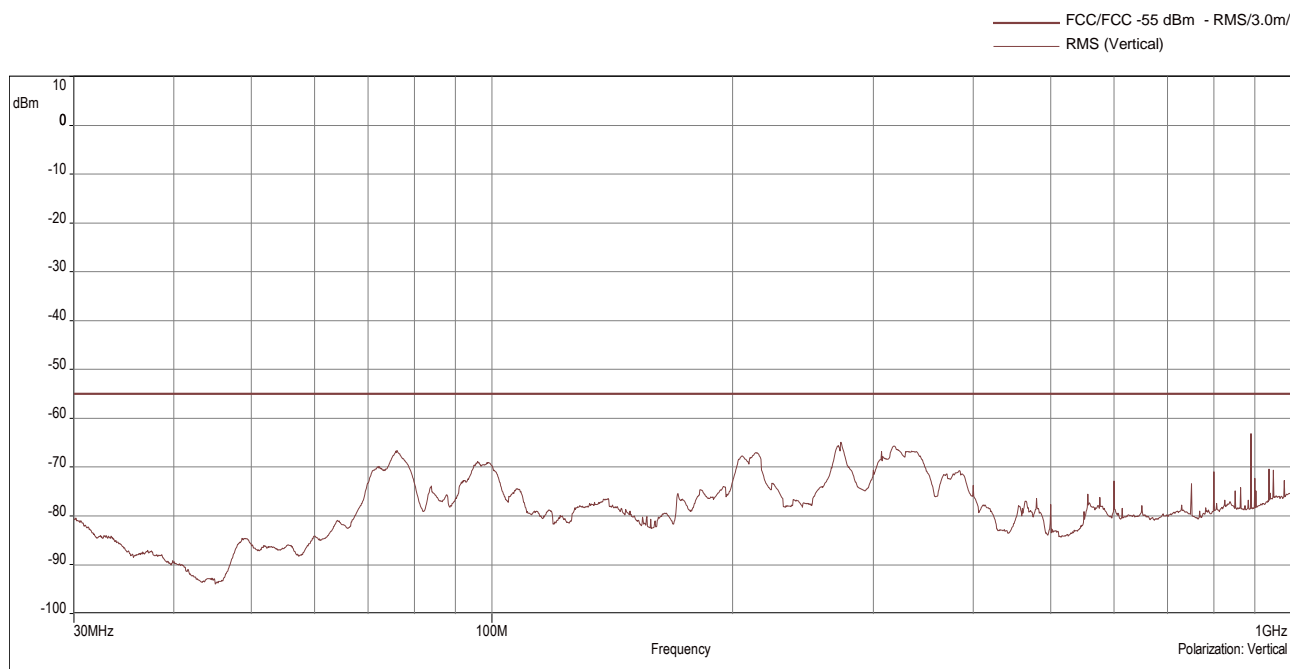




EMC Test Report No.: 23-0223


EMC tests on Andrew CAP M2 17E/19/23/25T [WCS 2300] F-AC-F1



1 GHz - 18 GHz, horizontal

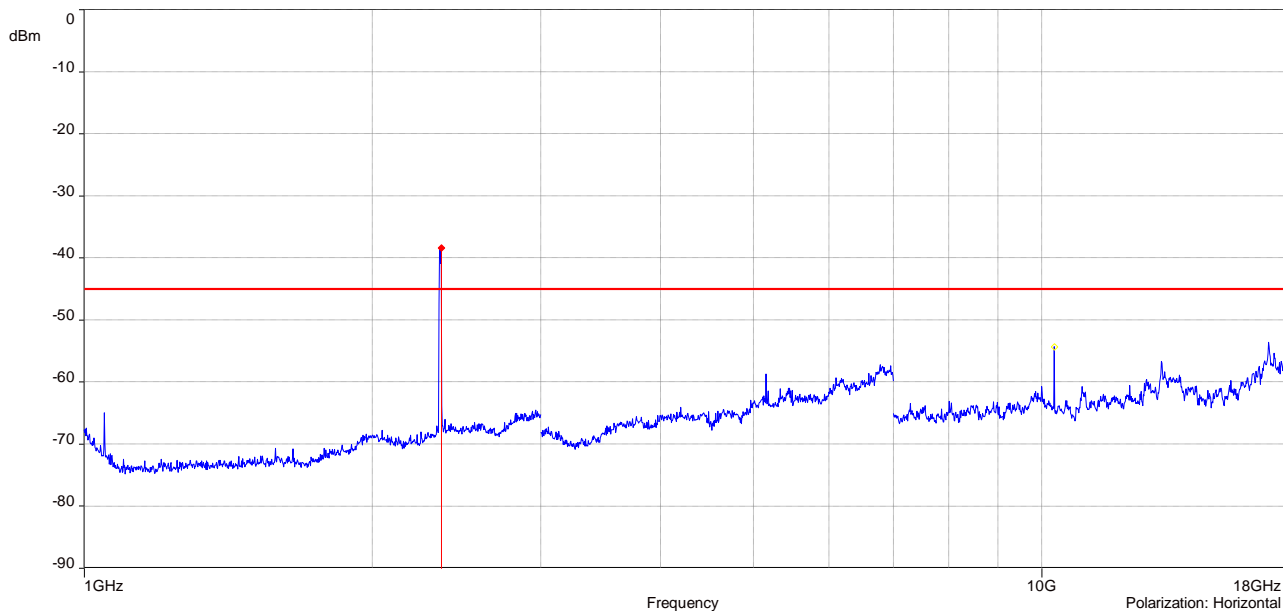

1 GHz - 18 GHz, vertical

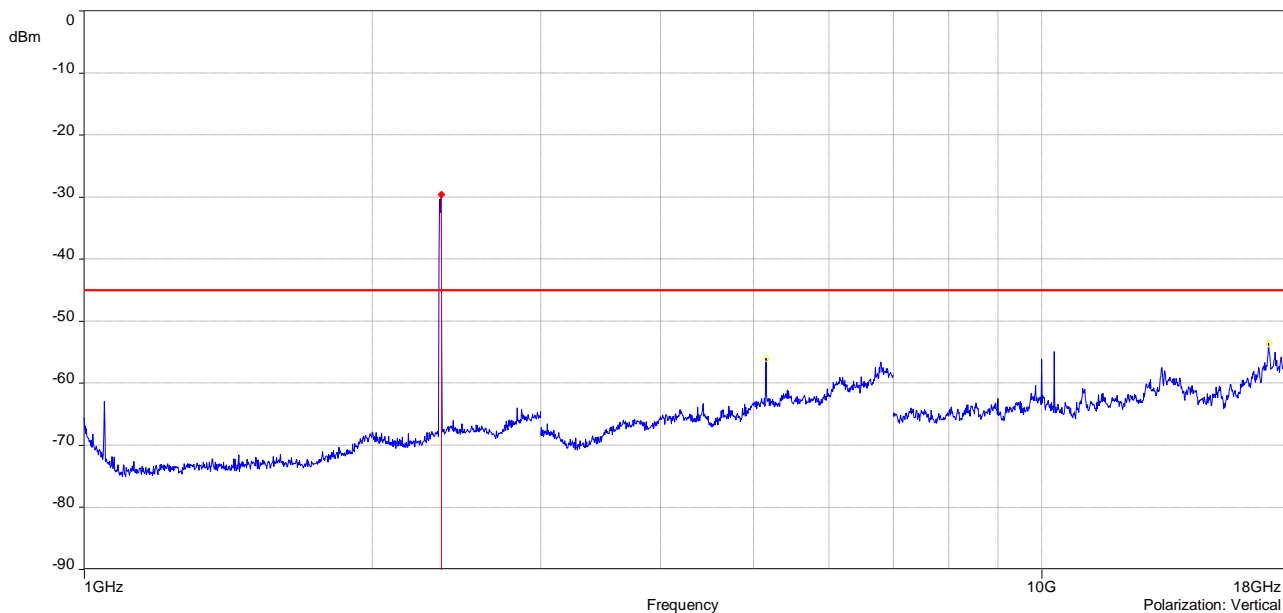




EMC Test Report No.: 23-0223

EMC tests on Andrew CAP M2 17E/19/23/25T [WCS 2300] F-AC-F1




18 GHz - 27 GHz, horizontal

— FCC/FCC -45 dBm - RMS/3.0m/
— RMS (Horizontal)

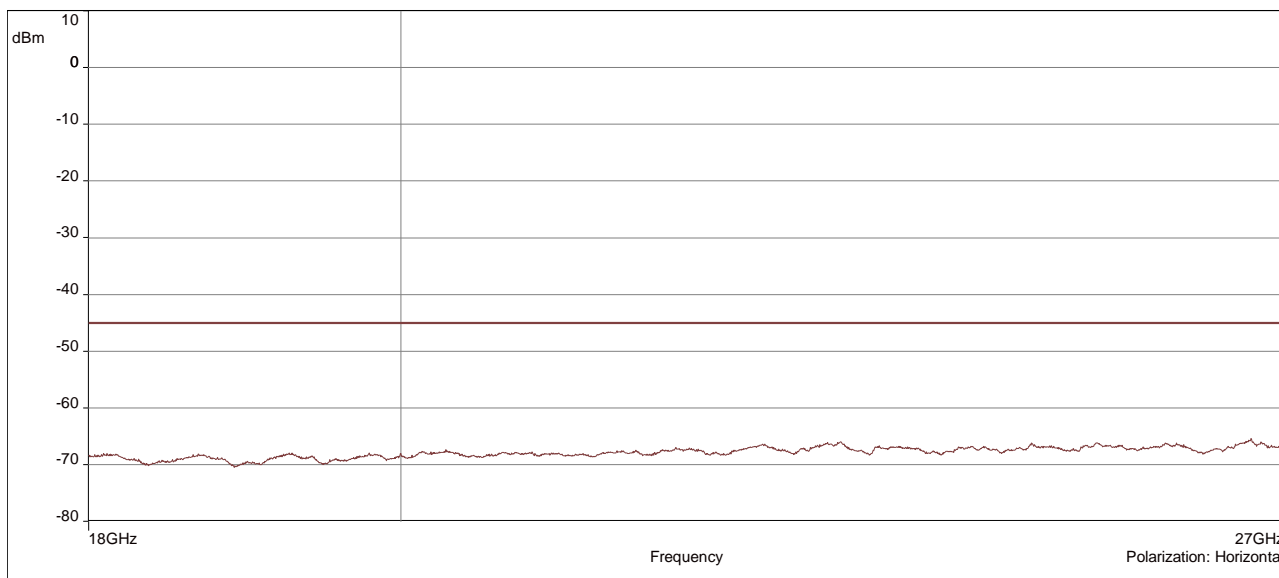

18 GHz - 27 GHz, vertical

— FCC/FCC -45 dBm - RMS/3.0m/
— RMS (Vertical)

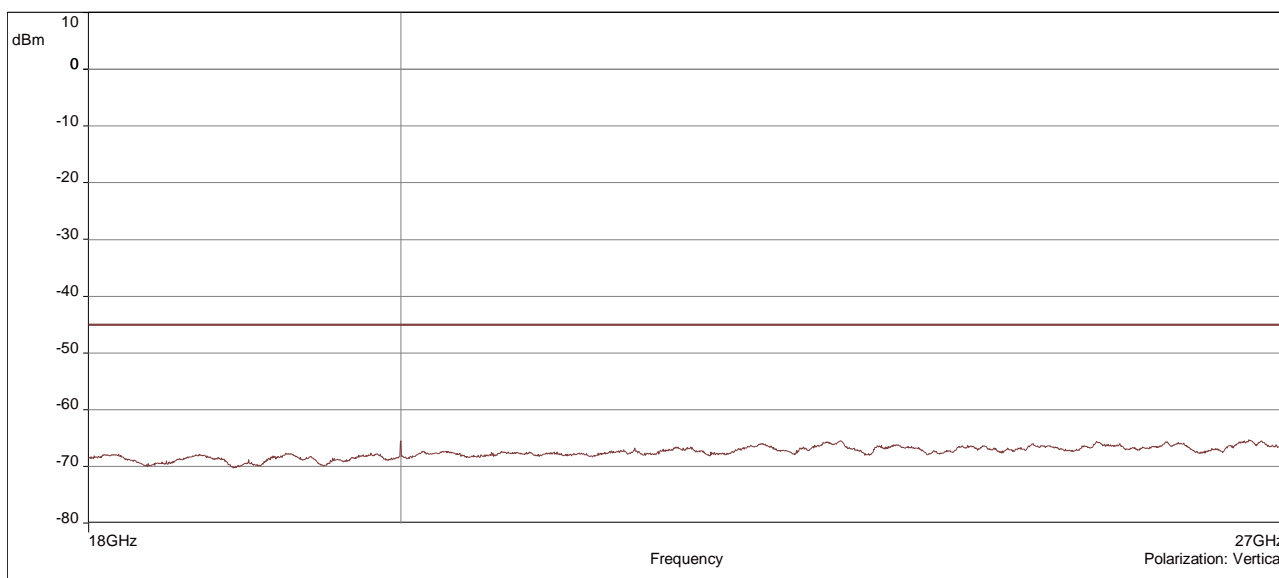




EMC Test Report No.: 23-0223

EMC tests on Andrew CAP M2 17E/19/23/25T [WCS 2300] F-AC-F1




4.8.4.2 Frequency Band = Band WCS 2300, ANT 1and 2 (MIMO). Direction = RF Downlink

30 MHz - 1 GHz, horizontal

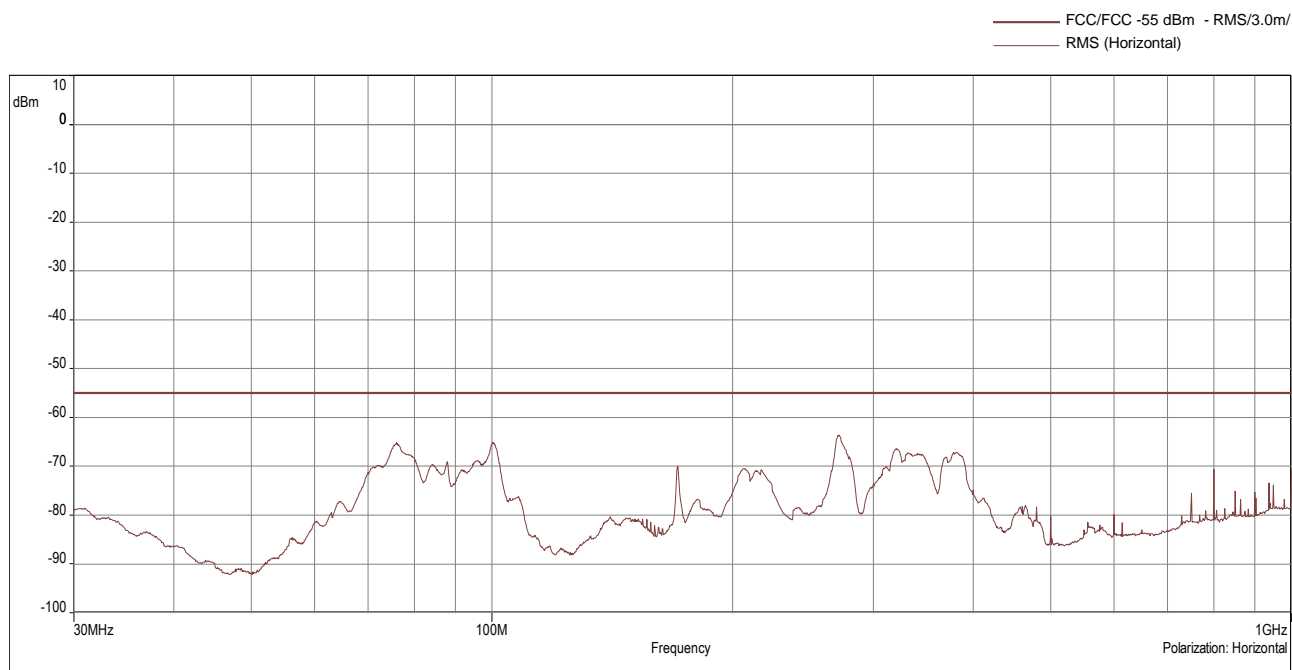

30 MHz - 1 GHz, vertical

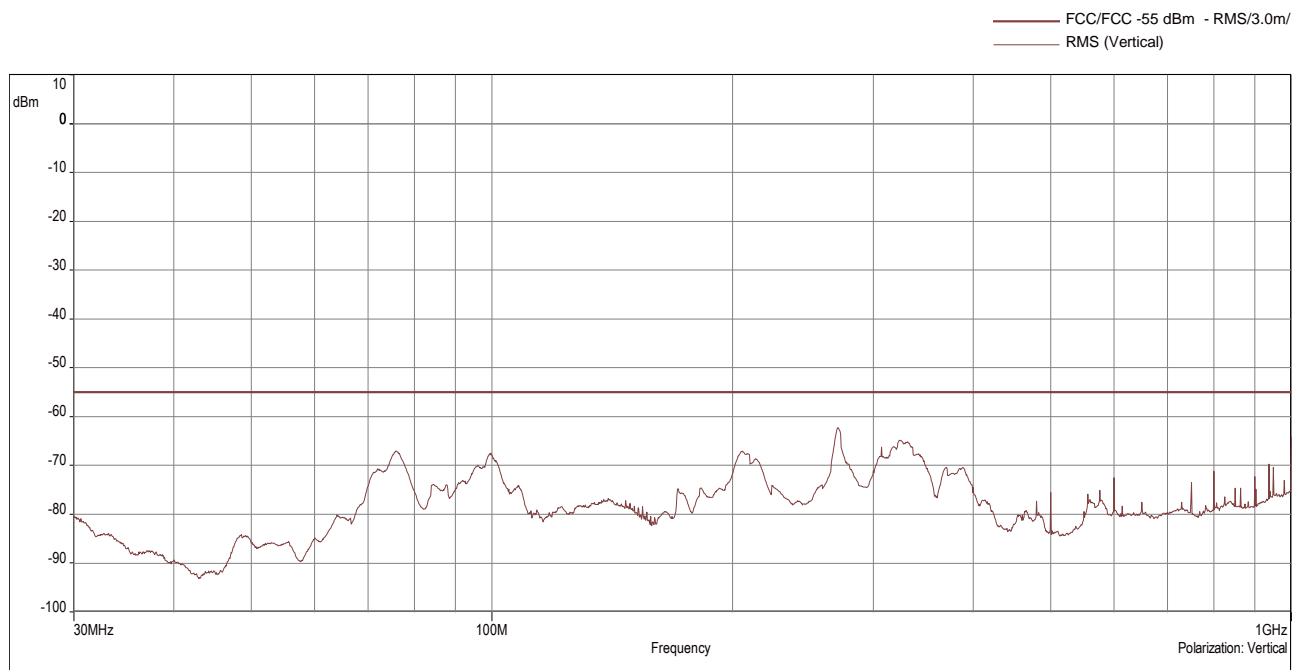




EMC Test Report No.: 23-0223


EMC tests on Andrew CAP M2 17E/19/23/25T [WCS 2300] F-AC-F1



1 GHz - 18 GHz, horizontal

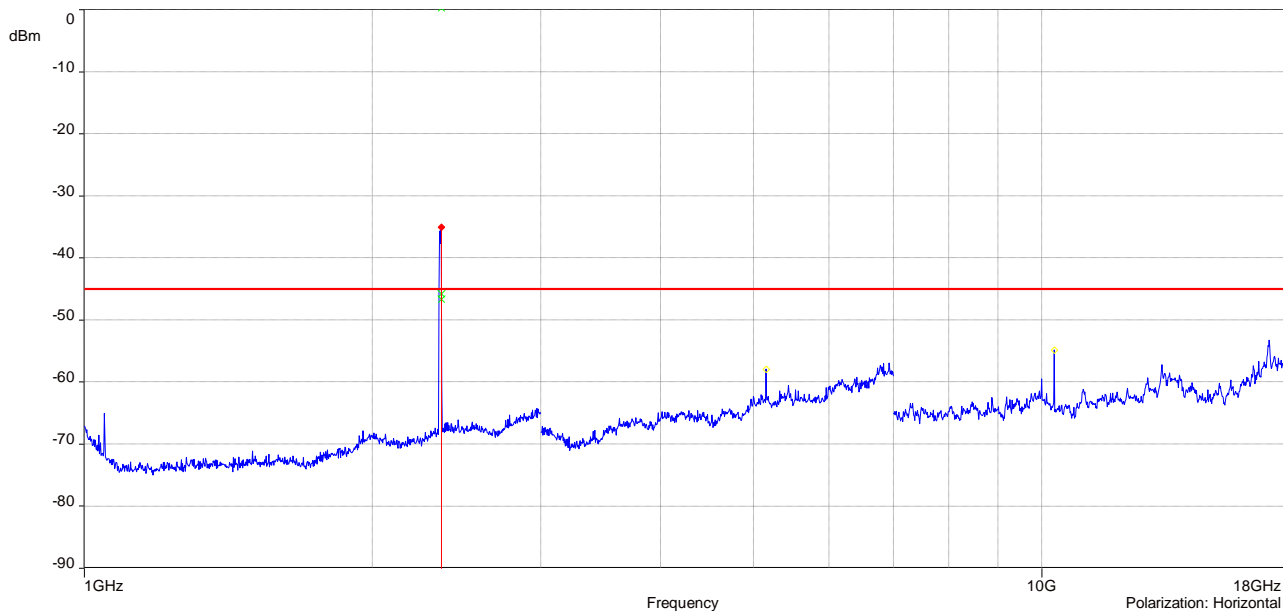

1 GHz - 18 GHz, vertical

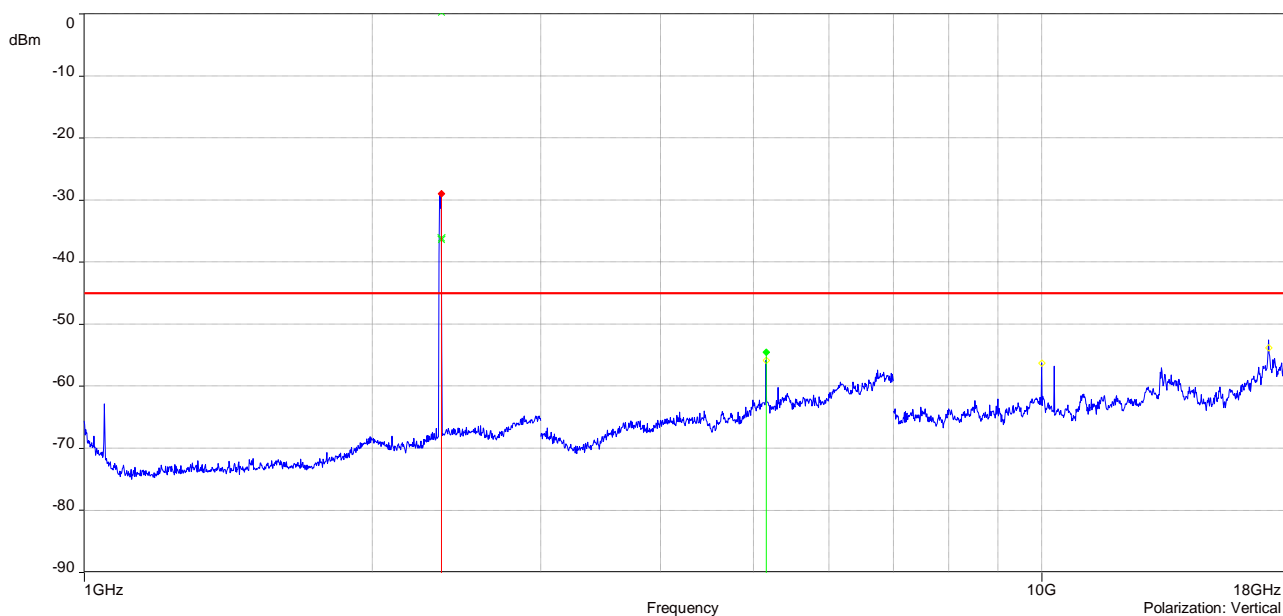




EMC Test Report No.: 23-0223

EMC tests on Andrew CAP M2 17E/19/23/25T [WCS 2300] F-AC-F1




18 GHz - 27 GHz, horizontal

— FCC/FCC -45 dBm - RMS/3.0m/
— RMS (Horizontal)

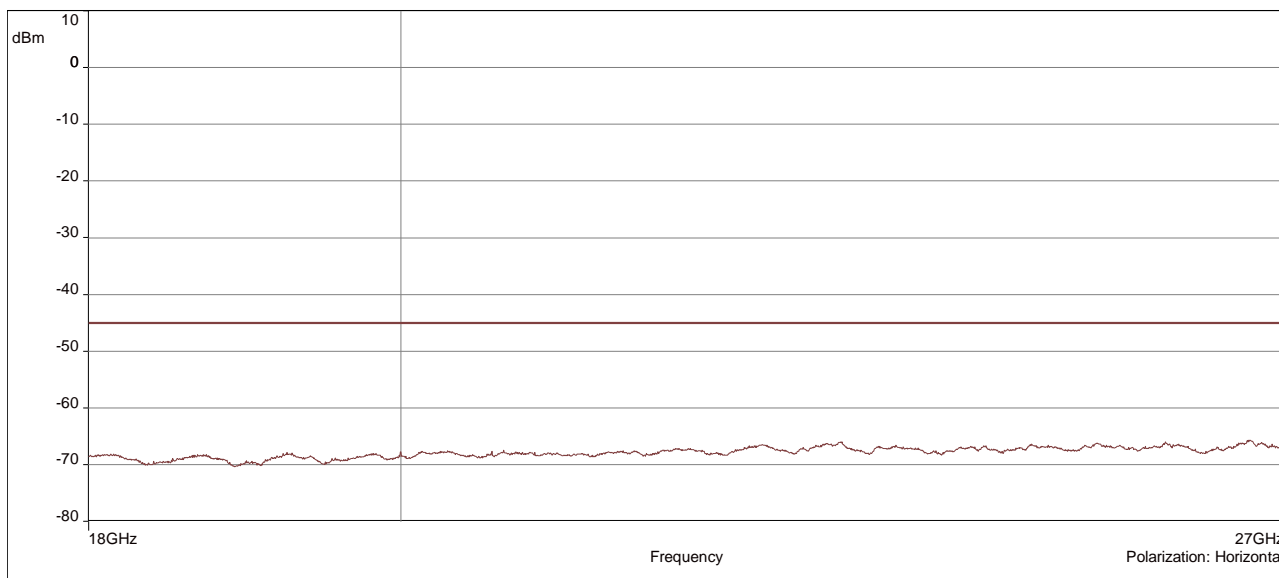

18 GHz - 27 GHz, vertical

— FCC/FCC -45 dBm - RMS/3.0m/
— RMS (Vertical)

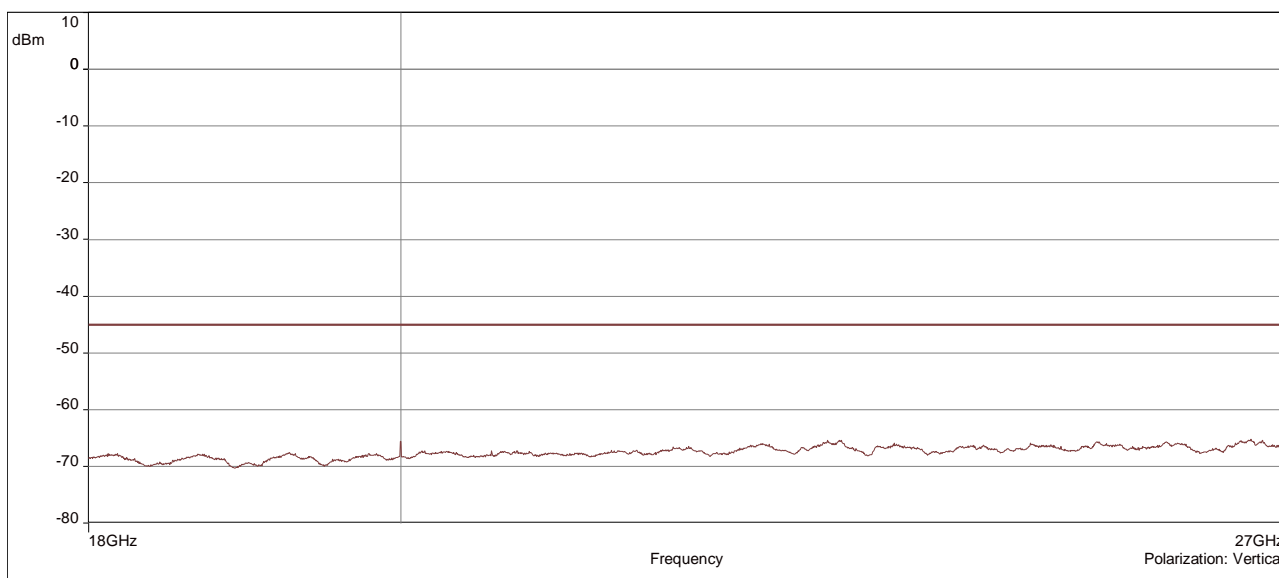



EMC Test Report No.: 23-0223

EMC tests on Andrew CAP M2 17E/19/23/25T [WCS 2300] F-AC-F1

4.8.5 FIELD STRENGTH CALCULATIONS

$$\mathbf{FS} = \mathbf{SA} + \mathbf{AF} + \mathbf{CL} + \mathbf{PA}$$

Where as:

- FS** = Field strength
- SA** = EMC test receiver reading
- AF** = Antenna factor
- CL** = Cable loss
- PA** = Preamplifier

4.8.6 TEST EQUIPMENT USED

- Radiated Emissions



EMC Test Report No.: 23-0223

EMC tests on Andrew CAP M2 17E/19/23/25T [WCS 2300] F-AC-F1





EMC Test Report No.: 23-0223

EMC tests on Andrew CAP M2 17E/19/23/25T [WCS 2300] F-AC-F1



5 TEST EQUIPMENT

5.1 CONDUCTED EMISSIONS

Ref.No.	Type	Description	Manufacturer	Inventory no.	Last Calibration	Calibration Due
1.1	FSV40 *	Signal Analyzer 10 Hz - 40 GHz	Rohde & Schwarz	E-003139	2023-10	2024-10
1.2	SMBV100A	Vector Signal Generator 9 kHz - 6 GHz	Rohde & Schwarz	E-003206	2023-01	2025-01
1.3	n. a.	Switchbox for Wireless	Bureau Veritas	E-003951	2023-10	2024-10
1.4	LabView	Software	NI	Auto Messung 1 Channel V8	---	---

5.2 RADIATED EMISSIONS

Ref.No.	Type	Description	Manufacturer	Inventory no.	Last Calibration	Calibration Due
1.5	ESU40 *	EMI test receiver 10 Hz - 40 GHz	Rohde & Schwarz	E-003138	2023-10	2024-10
1.6	CBL 6111C	Antenna 30 MHz - 1 GHz	Chase	E-003226	2021-10	2024-10
1.7	HL 025	Antenna 1 GHz - 18 GHz	Rohde & Schwarz	E-003259	2022-10	2024-10
1.8	MWH-1826/B	Antenna 18 GHz - 26.5 GHz	ARA Inc.	E-003233	2022-11	2024-11
1.9	AM1431 *	Pre amplifier 10 kHz - 1 GHz	Miteq	E-003365	2023-10	2024-10
1.10	AFS4-00102000 *	Preamplifier 100 MHz - 20 GHz	Miteq	E-003633	2022-10	2023-10
1.11	AMP-18000-40000- 60-18-2.9-F	Preamplifier 18 GHz - 40 GHz	TTE Europe	E-004003	2023-10	2024-10
1.12	CO3000	Controller SAC	Innco systems GmbH	E-003052 with Software 1.02.62	---	---
1.13	BAT-EMC	Software	Nexio	V 2023.0.3.0	---	---

6 ANTENNA FACTORS, CABLE LOSS AND SAMPLE CALCULATIONS

This chapter contains the antenna factors with their corresponding path loss of the used measurement path for all antennas.

6.1 ANTENNA CHASE CBL 6111C (30 MHZ – 1 GHZ)

($d_{Limit} = 3 \text{ m}$)

Frequency	AF	Corr.	cable loss 1 (inside chamber)	cable loss 2 (outside chamber)	cable loss 3 (switch unit)	cable loss 4 (to receiver)	distance corr. (-20 dB/decade)	d_{Limit} (meas. distance (limit))	d_{used} (meas. distance (used))
MHz	dB (1/m)	dB	dB	dB	dB	dB	dB	m	m
30	18.6	0.6	0.29	0.04	0.23	0.02	0.0	3	3
50	6.0	0.9	0.39	0.09	0.32	0.08	0.0	3	3
100	9.7	1.2	0.56	0.14	0.47	0.08	0.0	3	3
150	7.9	1.6	0.73	0.20	0.59	0.12	0.0	3	3
200	7.6	1.9	0.84	0.21	0.70	0.11	0.0	3	3
250	9.5	2.1	0.98	0.24	0.80	0.13	0.0	3	3
300	11.0	2.3	1.04	0.26	0.89	0.15	0.0	3	3
350	12.4	2.6	1.18	0.31	0.96	0.13	0.0	3	3
400	13.6	2.9	1.28	0.35	1.03	0.19	0.0	3	3
450	14.7	3.1	1.39	0.38	1.11	0.22	0.0	3	3
500	15.6	3.2	1.44	0.39	1.20	0.19	0.0	3	3
550	16.3	3.5	1.55	0.46	1.24	0.23	0.0	3	3
600	17.2	3.5	1.59	0.43	1.29	0.23	0.0	3	3
650	18.1	3.6	1.67	0.34	1.35	0.22	0.0	3	3
700	18.5	3.6	1.67	0.42	1.41	0.15	0.0	3	3
750	19.1	4.1	1.87	0.54	1.46	0.25	0.0	3	3
800	19.6	4.1	1.90	0.46	1.51	0.25	0.0	3	3
850	20.1	4.4	1.99	0.60	1.56	0.27	0.0	3	3
900	20.8	4.7	2.14	0.60	1.63	0.29	0.0	3	3
950	21.1	4.8	2.22	0.60	1.66	0.33	0.0	3	3
1000	21.6	4.9	2.23	0.61	1.71	0.30	0.0	3	3

Sample calculation

$$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + AF \text{ (dB 1/m)} + Corr. \text{ (dB)}$$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

distance correction = $-20 * \text{LOG} (d_{Limit}/ d_{used})$

Linear interpolation will be used for frequencies in between the values in the table.

Tables show an extract of values.

6.2 ANTENNA ROHDE & SCHWARZ HL 025 (1 GHZ – 18 GHZ)

Frequency	AF	Corr.
MHz	dB (1/m)	dB
1000	24.4	-19.4
2000	28.5	-17.4
3000	31.0	-16.1
4000	33.1	-14.7
5000	34.4	-13.7
6000	34.7	-12.7
7000	35.6	-11.0

cable loss 1 (relay + cable inside chamber)	cable loss 2 (outside chamber)	cable loss 3 (switch unit. attenuator & pre-amp)	cable loss 4 (to receiver)
dB	dB	dB	dB
0.99	0.31	-21.51	0.79
1.44	0.44	-20.63	1.38
1.87	0.53	-19.85	1.33
2.41	0.67	-19.13	1.31
2.78	0.86	-18.71	1.40
2.74	0.90	-17.83	1.47
2.82	0.86	-16.19	1.46

Frequency	AF	Corr.
MHz	dB (1/m)	dB
3000	31.0	-23.4
4000	33.1	-23.3
5000	34.4	-21.7
6000	34.7	-21.2
7000	35.6	-19.8

cable loss 1 (relay inside chamber)	cable loss 2 (inside chamber)	cable loss 3 (outside chamber)	cable loss 4 (switch unit. attenuator & pre-amp)	cable loss 5 (to receiver)	used for FCC 15.247
dB	dB	dB	dB	dB	
0.47	1.87	0.53	-27.58	1.33	
0.56	2.41	0.67	-28.23	1.31	
0.61	2.78	0.86	-27.35	1.40	
0.58	2.74	0.90	-26.89	1.47	
0.66	2.82	0.86	-25.58	1.46	

Frequency	AF	Corr.
MHz	dB (1/m)	dB
7000	35.6	-57.3
8000	36.3	-56.3
9000	37.1	-55.3
10000	37.5	-56.2
11000	37.5	-55.3
12000	37.6	-53.7
13000	38.2	-53.5
14000	39.9	-56.3
15000	40.9	-54.1
16000	41.3	-54.1
17000	42.8	-54.4
18000	44.2	-54.7

cable loss 1 (relay inside chamber)	cable loss 2 (High Pass)	cable loss 3 (pre-amp)	cable loss 4 (inside chamber)	cable loss 5 (outside chamber)	cable loss 6 (to receiver)
dB	dB	dB	dB	dB	dB
0.56	1.28	-62.72	2.66	0.94	1.46
0.69	0.71	-61.49	2.84	1.00	1.53
0.68	0.65	-60.80	3.06	1.09	1.60
0.70	0.54	-61.91	3.28	1.20	1.67
0.80	0.61	-61.40	3.43	1.27	1.70
0.84	0.42	-59.70	3.53	1.26	1.73
0.83	0.44	-59.81	3.75	1.32	1.83
0.91	0.53	-63.03	3.91	1.40	1.77
0.98	0.54	-61.05	4.02	1.44	1.83
1.23	0.49	-61.51	4.17	1.51	1.85
1.36	0.76	-62.36	4.34	1.53	2.00
1.70	0.53	-62.88	4.41	1.55	1.91

Sample calculation

$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + AF \text{ (dB 1/m)} + Corr. \text{ (dB)}$
 U = Receiver reading
 AF = Antenna factor
 Corr. = sum of single correction factors of used cables. switch unit. distance correction. amplifier (if applicable)
 Linear interpolation will be used for frequencies in between the values in the table.
 Tables show an extract of values.



6.3 ANTENNA ARA INC. MWH-1826-B (18 GHZ – 26.5 GHZ) PARTIALLY IN CONJUNCTION WITH PRE-AMPLIFIER MITEQ JS43-1800-4000: THE USE OF THE PRE-AMPLIFIER IS DEPENDENT FROM THE FIELD STRENGTH

Table with 5 columns: Frequency (MHz), AF (dB (1/m)), Corr. (dB), cable loss 1 (inside chamber) (dB), cable loss 2 (pre-amp) (dB), cable loss 3 (inside chamber) (dB), cable loss 4 (switch unit) (dB), cable loss 5 (to receiver) (dB). Rows range from 18000 to 26500 MHz.

Sample calculation

E (dB μV/m) = U (dB μV) + AF (dB 1/m) + Corr. (dB)
U = Receiver reading
AF = Antenna factor
Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)
Linear interpolation will be used for frequencies in between the values in the table.
Table shows an extract of values.



EMC Test Report No.: 23-0223

EMC tests on Andrew CAP M2 17E/19/23/25T [WCS 2300] F-AC-F1

7 MEASUREMENT UNCERTAINTIES

KDB 935210 D05	ECL
Power measurement	0,68 dB
Measuring AGC threshold level	0,90 dB
Out of band rejection	0,90 dB
Input-versus-output signal comparison	0,91 dB
Mean power output	0,90 dB
Measuring out-of-band/out-of-block (including intermodulation) emissions and spurious emissions	0,90 dB
Out-of-band/out-of-block emissions conducted measurements	0,90 dB
Spurious emissions conducted	2,18 dB
Spurious emissions radiated measurements	5,38 dB
Total frequency uncertainty	2×10^{-7}

Reference :

ECL-MU5.4.6.3-EMC-14-001-V03.00 MU Wireless.xlsx



**BUREAU
VERITAS**

EMC Test Report No.: 23-0223

EMC tests on Andrew CAP M2 17E/19/23/25T [WCS 2300] F-AC-F1

8 PHOTO REPORT

Please see separate photo report.



EMC Test Report No.: 23-0223

EMC tests on Andrew CAP M2 17E/19/23/25T [WCS 2300] F-AC-F1

ANNEX A: ACCREDITATION CERTIFICATE (FOR INFORMATION)

The accreditation relates to competences stated on the accreditation certificate. The current certificate is available on the homepage of the DAkkS and can be downloaded under accredited bodies with the processing number:

<https://www.dakks.de/en>



**BUREAU
VERITAS**

EMC Test Report No.: 23-0223

EMC tests on Andrew CAP M2 17E/19/23/25T [WCS 2300] F-AC-F1

ANNEX B: ADDITIONAL INFORMATION PROVIDED BY CLIENT

None.

***** End of test report *****