



ECL-TA Test Report No.: 20-004

| | |
|------------------------|--|
| Designation: | CAP MX AC 6/7E/80-85/17E/19/23/25T |
| Manufacturer: | Andrew |
| Serial No(s): | 8 |
| ID No. | 7830127-0001, Rev.: 00 |
| Test Specification(s): | ANSI 63.26:2015 FCC Rules and Regulations as listed in 47 CFR, Part 20:2019-10-01 |
| Test Plan: | Measurement of Band 5 / CELL 850 downlink. |
| Test Result: | Passed |

| | | | |
|-------------------|-----------------------------|------------------------|------------|
| Date of issue: | 2020-10-23 | | Signature: |
| Version: | 01 | Technical Reviewer: | |
| Date of delivery: | 2020-07 | | |
| Performance date: | 2020-09-09. – 2020-10-05 | Report Reviewer: | |



The test results relates only to the tested item. The sample has been provided by the client.
Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.

Bureau Veritas
Consumer Products Services Germany GmbH
www.bureauveritas.de/cps
Phone: +49 (0)40 – 740 41 – 0

Schwerin
Wilhelm-Hennemann-Str. 8, 19061 Schwerin
cps-schwerin@de.bureauveritas.com

Tuerkheim
Businesspark A96, 86842 Tuerkheim
cps-tuerkheim@de.bureauveritas.com

Managing Director: Sebastian Doose/Stefan Kischka

Hamburg
Oehleckerring 40, 22419 Hamburg
cps-hamburg@de.bureauveritas.com

Nuremberg
Thurn-und-Taxis-Str. 18, 90411 Nuremberg
cps-nuernberg@de.bureauveritas.com

Reg.No.: Schwerin HRB 3564



**BUREAU
VERITAS**

EfectiveECL-TA-20-004-V01.00

TA tests on Andrew CAP MX AC 6/7E/80-
85/17E/19/23/25T

Commscope

Client:

Andrew Wireless System GmbH

Industriering 10

86675 Buchdorf Germany

Test Laboratory:

Bureau Veritas Consumer Products Services Germany GmbH

Thurn-und-Taxis-Straße 18

D-90411 Nürnberg

Tel.: +49 40 74041 0

Fax: +49 40 74041-2755

Versions management:

V01.00

Initial release



Effective ECL-TA-20-004-V01.00

TA tests on Andrew CAP MX AC 6/7E/80-85/17E/19/23/25T

Table of Contents

| | | |
|-----|---|----|
| 1 | APPLIED STANDARDS AND TEST SUMMARY | 4 |
| 1.1 | APPLIED STANDARDS | 4 |
| 1.2 | FCC-IC CORRELATION TABLE | 5 |
| 1.3 | MEASUREMENT SUMMARY/SIGNATURES | 6 |
| 2 | ADMINISTRATIVE DATA | 9 |
| 2.1 | TESTING LABORATORY | 9 |
| 2.2 | APPLICANT DATA | 9 |
| 2.3 | MANUFACTURER DATA | 9 |
| 3 | TEST OBJECT DATA..... | 10 |
| 3.1 | GENERAL EUT DESCRIPTION | 10 |
| 3.2 | EUT MAIN COMPONENTS | 11 |
| 3.3 | ANCILLARY EQUIPMENT | 11 |
| 3.4 | AUXILIARY EQUIPMENT..... | 12 |
| 3.5 | EUT SETUPS..... | 13 |
| 3.6 | PRODUCT LABELLING..... | 14 |
| 4 | TEST RESULTS | 15 |
| 4.1 | EFFECTIVE RADIATED POWER, MEAN OUTPUT POWER AND ZONE ENHANCER GAIN 15 | |
| 4.2 | PEAK TO AVERAGE RATIO | 22 |
| 4.3 | OCCUPIED BANDWIDTH/INPUT-VERSUS-OUTPUT SPECTRUM..... | 26 |
| 4.4 | CONDUCTED SPURIOUS EMISSIONS AT ANTENNA TERMINALS..... | 34 |
| 4.5 | OUT-OF-BAND EMISSION LIMITS | 42 |
| 4.6 | OUT-OF-BAND REJECTION | 54 |
| 4.7 | FIELD STRENGTH OF SPURIOUS RADIATION..... | 56 |
| 5 | TEST EQUIPMENT | 64 |
| 6 | ANTENNA FACTORS, CABLE LOSS AND SAMPLE CALCULATIONS | 65 |
| 6.1 | ANTENNA CHASE CBL 6111C (30 MHZ – 1 GHZ) | 65 |
| 6.2 | ANTENNA ROHDE & SCHWARZ HL 025 (1 GHZ – 18 GHZ) | 66 |
| 6.3 | ANTENNA ARA INC. MWH-1826-B (18 GHZ – 26.5 GHZ) PARTIALLY IN CONJUNCTION WITH PRE-AMPLIFIER MITEQ JS43-1800-4000: THE USE OF THE PRE-AMPLIFIER IS DEPENDENT FROM THE FIELD STRENGTH | 67 |
| 7 | MEASUREMENT UNCERTAINTIES..... | 68 |
| 8 | PHOTO REPORT | 69 |
| | Annex A: Accreditation certificate (for information) | 70 |
| | Annex B: Additional information provided by client..... | 71 |



Effective ECL-TA-20-004-V01.00

TA tests on Andrew CAP MX AC 6/7E/80-
85/17E/19/23/25T

1 APPLIED STANDARDS AND TEST SUMMARY

1.1 APPLIED STANDARDS

Type of Authorization

Certification for an Industrial Signal Booster.

Applicable FCC Rules

Prepared in accordance with the requirements of FCC Rules and Regulations as listed in 47 CFR Ch.1 Parts 2 and 20, 22. The following subparts are applicable to the results in this test report.

Part 2, Subpart J - Equipment Authorization Procedures, Certification

Part 20, Commercial Mobile Services

§ 20.21 Signal Boosters

Part 22, Subpart H – Cellular Radiotelephone Service

§ 22.905 – Channels for cellular service

§ 22.913 – Effective radiated power limits

§ 22.917 – Emission limitations for cellular equipment

The tests were selected and performed with reference to:

- FCC Public Notice 935210 applying "Signal Boosters Basic Certification Requirements" 935210 D02, 2019-15-04.
- FCC Public Notice 935210 applying "Measurement guidance for industrial and non-consumer signal booster, repeater and amplifier devices" 935210 D05, 2019-04-03.
- FCC Public Notice 971168 applying "Measurement guidance for certification of licensed digital transmitters" 971168 D01, 2019-04-09.
- ANSI C63.26: 2015



Effective ECL-TA-20-004-V01.00

TA tests on Andrew CAP MX AC 6/7E/80-
85/17E/19/23/25T

Summary Test Results:

The EUT complies with all performed tests as listed in chapter 1.3 Measurement Summary/Signatures.

1.2 FCC-IC CORRELATION TABLE

**Correlation of measurement requirements for
Industrial Signal Booster from FCC and ISED Canada**

| Measurement | FCC reference | ISED reference |
|--|--|---|
| Effective radiated power, mean output power and zone enhancer gain | § 2.1046 § 22.913 KDB 935210 D05 v01r04: 3.5 | RSS-GEN Issue 5, 6.12 RSS-131 Issue 3: 5.2.3 RSS-132 Issue 3, 5.4 SRSP-503, Issue 7, 5.1.1 |
| Peak to Average Ratio | § 22.913 | RSS-132 Issue 3, 5.4 |
| Occupied bandwidth Input-versus-output spectrum | § 2.1049 KDB 935210 D05 v01r04: 3.4 | RSS-GEN Issue 5, 6.7 RSS-131 Issue 3: 5.2.2 |
| Conducted spurious Emission at Antenna Terminal | § 2.1051 § 22.917 KDB 935210 D05 v01r04: 3.6 | RSS-GEN Issue 5, 6.13 RSS-132 Issue 3, 5.5 |
| Out-of-band emissions limits | § 2.1051 § 22.917 KDB 935210 D05 v01r04: 3.6 | RSS-GEN Issue 5, 6.13 RSS-132 Issue 3, 5.5 |
| Frequency stability | § 2.1055 § 22.355 | RSS-GEN Issue 5, 6.11 RSS-131 Issue 3: 5.2.4 RSS-132 Issue 3, 5.3 |
| Field strength of spurious radiation | § 2.1053 § 22.917 | RSS-GEN Issue 5, 6.13 RSS-132 Issue 3, 5.5 |
| Out-of-band rejection | KDB 935210 D05 v01r04: 3.3 | RSS-131 Issue 3: 5.2.1 |
| All measurements | ANSI 63.26 | ANSI 63.26 |



**BUREAU
VERITAS**

Effective ECL-TA-20-004-V01.00

TA tests on Andrew CAP MX AC 6/7E/80-
85/17E/19/23/25T

1.3 MEASUREMENT SUMMARY/SIGNATURES

**47 CFR CHAPTER I FCC PART 22 Subpart H [Base § 2.1046, § 22.913
Stations/Repeater]**

Effective Radiated Power, mean output power and zone enhancer gain
The measurement was performed according to ANSI C63.26, KDB
935210 D05 v01r04: 3.5

Final Result

OP-Mode

Frequency Band, Direction, Input Power, Signal Type

Band 5 CELL 850, RF downlink, 0.3 dB < AGC, Narrowband

Band 5 CELL 850, RF downlink, 0.3 dB < AGC, Wideband

Band 5 CELL 850, RF downlink, 3 dB > AGC, Narrowband

Band 5 CELL 850, RF downlink, 3 dB > AGC, Wideband

FCC

IC

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

**47 CFR CHAPTER I FCC PART 22 Subpart H [Base § 22.913
Stations/Repeater]**

Peak to Average Ratio

The measurement was performed according to ANSI C63.26

Final Result

OP-Mode

Frequency Band, Direction, Input Power, Signal Type

Band 5 CELL 850, RF downlink, 0.3 dB < AGC, Narrowband

Band 5 CELL 850, RF downlink, 0.3 dB < AGC, Wideband

Band 5 CELL 850, RF downlink, 3 dB > AGC, Narrowband

Band 5 CELL 850, RF downlink, 3 dB > AGC, Wideband

FCC

IC

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

**47 CFR CHAPTER I FCC PART 22 Subpart H [Base § 2.1049
Stations/Repeater]**

Occupied Bandwidth/Input-versus-output Spectrum

The measurement was performed according to ANSI C63.26, KDB
935210 D05 v01r04: 3.4

Final Result

OP-Mode

Frequency Band, Direction, Input Power, Signal Type

Band 5 CELL 850, RF downlink, 0.3 dB < AGC, Narrowband

Band 5 CELL 850, RF downlink, 0.3 dB < AGC, Wideband

Band 5 CELL 850, RF downlink, 3 dB > AGC, Narrowband

Band 5 CELL 850, RF downlink, 3 dB > AGC, Wideband

FCC

IC

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed



EfectiveECL-TA-20-004-V01.00

TA tests on Andrew CAP MX AC 6/7E/80-85/17E/19/23/25T

47 CFR CHAPTER I FCC PART 22 Subpart H [Base § 2.1051, § 22.917 Stations/Repeater]

Conducted spurious emissions at antenna terminals
The measurement was performed according to ANSI C63.26 **Final Result**

| OP-Mode | FCC | IC |
|--|--------|--------|
| Frequency Band, Direction, Input Power, Signal Type | | |
| Band 5 CELL 850, RF downlink, 0.3 dB < AGC, Narrowband | Passed | Passed |
| Band 5 CELL 850, RF downlink, 0.3 dB < AGC, Wideband | Passed | Passed |
| Band 5 CELL 850, RF downlink, 3 dB > AGC, Narrowband | Passed | Passed |
| Band 5 CELL 850, RF downlink, 3 dB > AGC, Wideband | Passed | Passed |

47 CFR CHAPTER I FCC PART 22 Subpart H [Base § 2.1051, § 22.917 Stations/Repeater]

Out-of-band emission limits
The measurement was performed according to ANSI C63.26, KDB 935210 D05 v01r04: 3.6 **Final Result**

| OP-Mode | FCC | IC |
|---|--------|--------|
| Band Edge, Frequency Band, Number of signals, Direction, Input Power, Signal Type | | |
| Lower, Band 5 CELL 850, 1, RF downlink, 0.3 dB < AGC, Narrowband | Passed | Passed |
| Lower, Band 5 CELL 850, 1, RF downlink, 0.3 dB < AGC, Wideband | Passed | Passed |
| Lower, Band 5 CELL 850, 1, RF downlink, 3 dB > AGC, Narrowband | Passed | Passed |
| Lower, Band 5 CELL 850, 1, RF downlink, 3 dB > AGC, Wideband | Passed | Passed |
| Lower, Band 5 CELL 850, 2, RF downlink, 0.3 dB < AGC, Narrowband | Passed | Passed |
| Lower, Band 5 CELL 850, 2, RF downlink, 0.3 dB < AGC, Wideband | Passed | Passed |
| Lower, Band 5 CELL 850, 2, RF downlink, 3 dB > AGC, Narrowband | Passed | Passed |
| Lower, Band 5 CELL 850, 2, RF downlink, 3 dB > AGC, Wideband | Passed | Passed |

47 CFR CHAPTER I FCC PART 22 Subpart H [Base § 2.1051, § 22.917 Stations/Repeater]

Out-of-band emission limits
The measurement was performed according to ANSI C63.26, KDB 935210 D05 v01r04: 3.6 **Final Result**

| OP-Mode | FCC | IC |
|---|--------|--------|
| Band Edge, Frequency Band, Number of signals, Direction, Input Power, Signal Type | | |
| Upper, Band 5 CELL 850, 1, RF downlink, 0.3 dB < AGC, Narrowband | Passed | Passed |
| Upper, Band 5 CELL 850, 1, RF downlink, 0.3 dB < AGC, Wideband | Passed | Passed |
| Upper, Band 5 CELL 850, 1, RF downlink, 3 dB > AGC, Narrowband | Passed | Passed |
| Upper, Band 5 CELL 850, 1, RF downlink, 3 dB > AGC, Wideband | Passed | Passed |
| Upper, Band 5 CELL 850, 2, RF downlink, 0.3 dB < AGC, Narrowband | Passed | Passed |
| Upper, Band 5 CELL 850, 2, RF downlink, 0.3 dB < AGC, Wideband | Passed | Passed |
| Upper, Band 5 CELL 850, 2, RF downlink, 3 dB > AGC, Narrowband | Passed | Passed |
| Upper, Band 5 CELL 850, 2, RF downlink, 3 dB > AGC, Wideband | Passed | Passed |



**BUREAU
VERITAS**

EfectiveECL-TA-20-004-V01.00

TA tests on Andrew CAP MX AC 6/7E/80-
85/17E/19/23/25T

**47 CFR CHAPTER I FCC PART 22 Subpart H [Base KDB 935210 D05 v01r04: 3.3
Stations/Repeater]**

Out-of-band rejection

The measurement was performed according to ANSI C63.26; KDB
935210 D05 v01r04: 3.3

Final Result

OP-Mode

Frequency Band, Direction

Setup

FCC

IC

Band 5 CELL 850, RF downlink

Passed

Passed

**47 CFR CHAPTER I FCC PART 22 Subpart H [Base § 2.1053, § 22.917
Stations/Repeater]**

Field strength of spurious radiation

The measurement was performed according to ANSI C63.26

Final Result

OP-Mode

Frequency Band, Test Frequency, Direction

FCC

IC

Band 5 CELL 850, high, RF downlink

Passed

Passed

Band 5 CELL 850, low, RF downlink

Passed

Passed

Band 5 CELL 850, mid, RF downlink

Passed

Passed

The test case frequency stability was not performed, since the EUT is not equipped with signal processing capabilities.



EfectiveECL-TA-20-004-V01.00

TA tests on Andrew CAP MX AC 6/7E/80-
85/17E/19/23/25T

2 ADMINISTRATIVE DATA

2.1 TESTING LABORATORY

Bureau Veritas Consumer Products Services Germany GmbH
Thurn-und-Taxis-Straße 18
D-90411 Nürnberg
Tel.: +49 40 74041 0
Fax: +49 40 74041-2755

2.2 APPLICANT DATA

Company Name: Commscope
Andrew Wireless Systems GmbH

Address: Industriering 10
86675 Buchdorf
Germany

Contact Person: Mr. Frank Futter

2.3 MANUFACTURER DATA

Company Name: Please see applicant data.

Address:



EfectiveECL-TA-20-004-V01.00

TA tests on Andrew CAP MX AC 6/7E/80-85/17E/19/23/25T

3 TEST OBJECT DATA

3.1 GENERAL EUT DESCRIPTION

| | |
|--|---|
| Kind of Device product description | Cellular Repeater |
| Product name | Cellular Repeater |
| Type | |
| Declared EUT data by the supplier | |
| General Product Description | The EUT is an industrial signal booster supporting the following: Band 5/CELL 850 Band 5 CELL 850/USA 700E Band 5 CELL 850/USA 750 Band 14/LMR 750 Band 25/PCS 1900 Band 27/CELL 800 Band 30/WCS 2300 Band 41/BRS Band 66/AWS 1700E (partly) Band 70/Band 70 Band 71/USA 600 A RF operation is only supported for the downlink. |
| Booster Type | Industrial Signal Booster |
| Voltage Type | AC/50 Hz – 60 Hz |
| Voltage Level | 100 V - 240 V |
| Maximum Output Donor Port [Uplink] | - |
| Nominal Output Server Port [Downlink] | All bands: 33 dBm |
| Nominal Gain [Uplink] | - |
| Nominal Gain [Downlink] | All bands: 33 dB |

The main components of the EUT are listed and described in chapter 3.2 EUT Main components.



Effective ECL-TA-20-004-V01.00

TA tests on Andrew CAP MX AC 6/7E/80-
85/17E/19/23/25T

3.2 EUT MAIN COMPONENTS

| Sample Name | FCC-ID | IC-ID |
|------------------|-----------------------|-------------|
| | XS5-CAPMX | 2237E-CAPMX |
| Sample Parameter | Value | |
| Serial Number | 8 | |
| HW Version | 7830127-0001 Rev.: 00 | |
| SW Version | 2.9.0.292 | |
| Comment | ----- | |

NOTE: The short description is used to simplify the identification of the EUT in this test report.

3.3 ANCILLARY EQUIPMENT

For the purposes of this test report, ancillary equipment is defined as equipment which is used in conjunction with the EUT to provide operational and control features to the EUT. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Ancillary Equipment can influence the test results.

| Device | Details (Manufacturer, Type Model, OUT Code) | Description |
|--------|--|-------------|
| - | - | - |



EfectiveECL-TA-20-004-V01.00

TA tests on Andrew CAP MX AC 6/7E/80-
85/17E/19/23/25T

3.4 AUXILIARY EQUIPMENT

For the purposes of this test report, auxiliary equipment is defined as equipment which is used temporarily to enable operational and control features especially used for the tests of the EUT which is not used during normal operation or equipment that is used during the tests in combination with the EUT but is not subject of this test report. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Auxiliary Equipment can influence the test results.

| Device | Details (Manufacturer; Type; S/N) | Description |
|---------------|--|---|
| AUX1 | Commscope/General Electric; ION-E PSU Shelf, AC; DM77662 | Rack in Conjunction with AUX 2 |
| AUX2 | Commscope/General Electric; Power Supply Unit; LBGPE17KZ39047532 | Power Supply |
| AUX3 | Commscope; ION-E WCS-2; SZAEAJ1952A0032 | Subrack in Conjunction with AUX 4, 5,6, 7 and 8 |
| AUX4 | Commscope; ION-E OPT; SZBEAD1951A0011 | Optical Card |
| AUX5 | Commscope; ION-E SUI; SZBEAC1746A0015 | LAN System Interface |
| AUX6 | Commscope; ION-E RFD; SZBEAP1920A0057 | RF Card |
| AUX7 | Commscope; ION-E RFD; SZBEAP1924A0023 | RF Card |
| AUX 8 | Commscope; ION-E RFD; SZBEAP1946A0003 | RF Card |



EffectiveECL-TA-20-004-V01.00

TA tests on Andrew CAP MX AC 6/7E/80-85/17E/19/23/25T

3.5 EUT SETUPS

This chapter describes the combination of EUTs and equipment used for testing. The rationale for selecting the EUTs, ancillary and auxiliary equipment and interconnecting cables, is to test a representative configuration meeting the requirements of the referenced standards.

| Setup | Combination of EUTs | Description and Rationale |
|-------|---------------------|---------------------------|
| | | Setup for all tests |

OPERATING MODES

This chapter describes the operating modes of the EUT used for testing.

3.5.1 TEST CHANNELS

| Band | Direction | Lower Frequency Band Edge [MHz] | Upper Frequency Band Edge [MHz] | Center Frequency [MHz] | Port |
|--------------|-----------|---------------------------------|---------------------------------|------------------------|-------|
| 5 (CELL 850) | Downlink | 869.00 | 894.00 | 881.50 | Donor |

3.5.2 AUTOMATIC GAIN CONTROL LEVELS

| AGC Levels | | | | | | | |
|------------|-----------|-------------|---------------------|-----------------------------|---------------------------|-----------------|-----------|
| Band | Direction | Signal Type | AGC Start Pin [dBm] | AGC Start Pin -0.3 dB [dBm] | AGC Start Pin +3 dB [dBm] | Frequency [MHz] | Frequency |
| 5 | Downlink | Narrowband | -1.8 | -2.1 | 1.2 | 881.50 | Mid |
| 5 | Downlink | Wideband | -1.8 | -2.1 | 1.2 | 881.50 | |
| 5 | Downlink | Narrowband | -2.0 | -2.3 | 1.0 | 869.20 | Low |
| 5 | Downlink | Wideband | -1.6 | -1.9 | 1.4 | 871.50 | |
| 5 | Downlink | Narrowband | -2.6 | -2.9 | 0.4 | 893.80 | High |
| 5 | Downlink | Wideband | -2.2 | -2.5 | 0.8 | 891.50 | |
| 5 | Downlink | Narrowband | -2.6 | -2.9 | 0.4 | 891.58 | Max.Power |
| 5 | Downlink | Wideband | -2.4 | -2.7 | 0.6 | 891.50 | |

Remark:

If the measured frequency f_0 for the max power has a too low distance to the band edges, because in the tests modulated signals must be used: The next possible frequency to the according band edge is used.

For example for the minimum distances to the band edges:

GSM-Signal (narrowband): 0.2 MHz

AWGN-signal (wideband): 2.5 MHz



EfectiveECL-TA-20-004-V01.00

TA tests on Andrew CAP MX AC 6/7E/80-
85/17E/19/23/25T

3.6 PRODUCT LABELLING

3.6.1 FCC ID LABEL

Please refer to the documentation of the applicant.

3.6.2 LOCATION OF THE LABEL ON THE EUT

Please refer to the documentation of the applicant.



Effective ECL-TA-20-004-V01.00

TA tests on Andrew CAP MX AC 6/7E/80-85/17E/19/23/25T

4 TEST RESULTS

4.1 EFFECTIVE RADIATED POWER, MEAN OUTPUT POWER AND ZONE ENHANCER GAIN

Standard FCC Part 22, § 22.913

The test was performed according to:
ANSI C63.26, KDB 935210 D05 v01r04: 3.5

Test date: 2020-10-05


Environmental conditions: 22 ° C; 45 % r. F.

Test engineer: Thomas Hufnagel

4.1.1 TEST DESCRIPTION

This test case is intended to demonstrate compliance to the signal booster power and gain limits and requirements for industrial signal boosters per FCC § 22.913, RSS-132 with subpart 5.4 and SRSP-503 with subpart 5.1.1.

The EUT was connected to the test setup according to the following diagram:

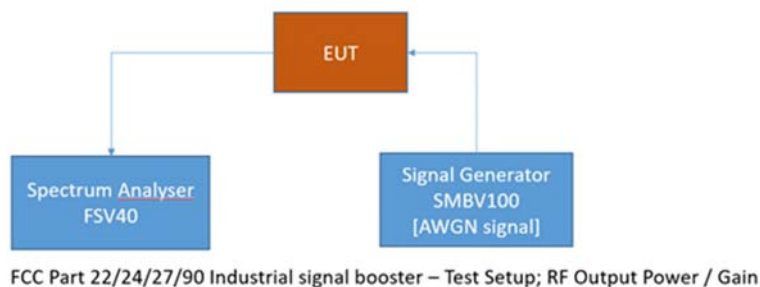

The attenuation of the measuring and stimulus path are known for each measured frequency and are considered.

The Spectrum Analyzer settings can be directly found in the measurement diagrams.



Effective ECL-TA-20-004-V01.00

TA tests on Andrew CAP MX AC 6/7E/80-85/17E/19/23/25T

4.1.2 TEST REQUIREMENTS/LIMITS: ABSTRACTS FROM STANDARDS

Part 27; Miscellaneous Wireless Communication Services

Subpart C – Technical standards

§ 22.913

Abstract § 22.913 from FCC:

(a) *Maximum ERP*. The ERP of transmitters in the Cellular Radiotelephone Service must not exceed the limits in this section.

(1) Except as described in paragraphs (a)(2), (3), and (4) of this section, the ERP of base stations and repeaters must not exceed—

- (i) 500 watts per emission; or
- (ii) 400 watts/MHz (PSD) per sector.

(2) Except as described in paragraphs (a)(3) and (4) of this section, for systems operating in areas more than 72 kilometers (45 miles) from international borders that:

- (i) Are located in counties with population densities of 100 persons or fewer per square mile, based upon the most recently available population statistics from the Bureau of the Census; or
- (ii) Extend coverage into Unserved Area on a secondary basis (*see* § 22.949), the ERP of base transmitters and repeaters must not exceed—

- (A) 1000 watts per emission; or
- (B) 800 watts/MHz (PSD) per sector.

(3) Provided that they also comply with paragraphs (b) and (c) of this section, licensees are permitted to operate their base transmitters and repeaters with an ERP greater than 400 watts/MHz (PSD) per sector, up to a maximum ERP of 1000 watts/MHz (PSD) per sector unless they meet the conditions in paragraph (a)(4) of this section.

(4) Provided that they also comply with paragraphs (b) and (c) of this section, licensees of systems operating in areas more than 72 kilometers (45 miles) from international borders that:

- (i) Are located in counties with population densities of 100 persons or fewer per square mile, based upon the most recently available population statistics from the Bureau of the Census; or
- (ii) Extend coverage into Unserved Area on a secondary basis (*see* § 22.949), are permitted to operate base transmitters and repeaters with an ERP greater than 800 watts/MHz (PSD) per sector, up to a maximum of 2000 watts/MHz (PSD) per sector.



BUREAU
VERITAS

EfectiveECL-TA-20-004-V01.00

TA tests on Andrew CAP MX AC 6/7E/80-
85/17E/19/23/25T

Abstract RSS-132 from ISED:

RSS-132; 5.4 Transmitter Output Power and Equivalent Isotropically Radiated Power

The transmitter output power shall be measured in terms of average power. The equivalent isotropically radiated power (e.i.r.p.) for mobile equipment shall not exceed 11.5 watts. Refer to SRSP-503 for base station e.i.r.p. limits.

Abstract SRSP-503 from ISED:

SRSP-503; 5.1.1 Transmitter Output Power and Equivalent Isotropically Radiated Power

The transmitter output power shall be measured in terms of average power. The equivalent isotropically radiated power (e.i.r.p.) for mobile equipment shall not exceed 11.5 watts. Refer to SRSP-503 for base station e.i.r.p. limits.



Effective ECL-TA-20-004-V01.00

TA tests on Andrew CAP MX AC 6/7E/80-85/17E/19/23/25T

4.1.3 TEST PROTOCOL

| Band 5, downlink | | | | | | | |
|------------------|--------------|-----------------|-------------------|------------------------------------|----------------------------------|----------------------|-----------|
| Signal Type | Input Power | Frequency [MHz] | Input Power [dBm] | Maximum Average Output Power [dBm] | Limit Average Output Power [dBm] | Margin to Limit [dB] | Gain [dB] |
| Wideband | 0.3 dB < AGC | 891.50 | -2.7 | 31.1 | 60.0 | 28.9 | 33.8 |
| Wideband | 3 dB > AGC | 891.50 | 0.6 | 30.8 | 60.0 | 29.2 | 30.2 |
| Narrowband | 0.3 dB < AGC | 891.58 | -2.9 | 31.3 | 60.0 | 28.7 | 34.2 |
| Narrowband | 3 dB > AGC | 891.58 | 0.4 | 31.2 | 60.0 | 28.8 | 30.8 |

Remarks: Please see next sub-clause for the measurement plot.




BUREAU
VERITAS

EffectiveECL-TA-20-004-V01.00


TA tests on Andrew CAP MX AC 6/7E/80-85/17E/19/23/25T

4.1.4 MEASUREMENT PLOT

Band: CELL 850; Frequency: 891.5800 MHz; Band Edge: f0; Mod: AWGN; Output Power 0.3 dB < AGC

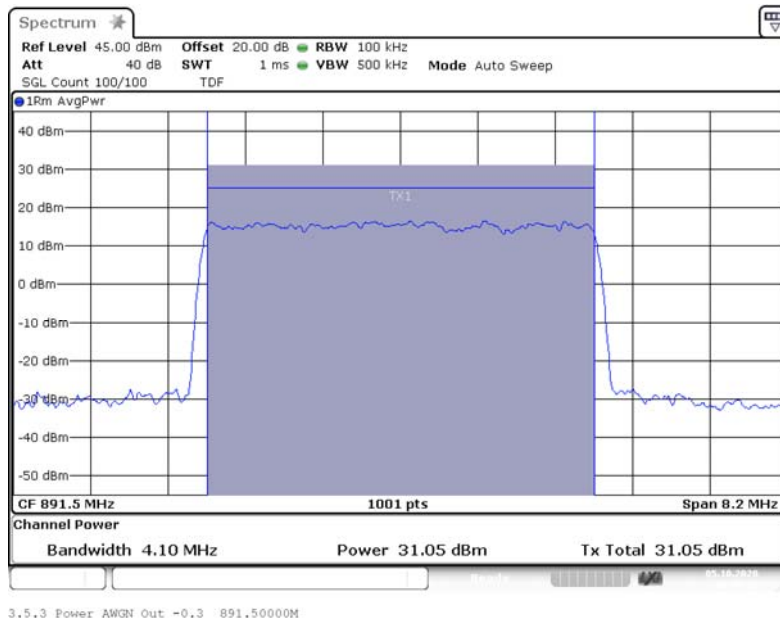

Band: CELL 850; Frequency: 891.5800 MHz; Band Edge: f0; Mod: AWGN; Output Power 3 dB > AGC

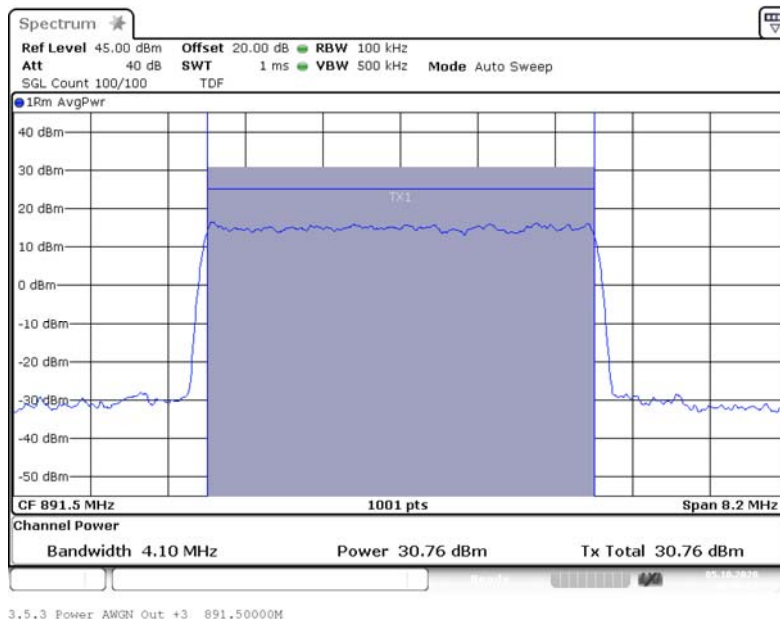



BUREAU
VERITAS

EffectiveECL-TA-20-004-V01.00


TA tests on Andrew CAP MX AC 6/7E/80-85/17E/19/23/25T

Band: CELL 850; Frequency: 891.5800 MHz; Band Edge: f0; Mod: GSM; Output Power 0.3 dB < AGC



3.5.3 Power GSM Out -0.3 891.58000M

Band: CELL 850; Frequency: 891.5800 MHz; Band Edge: f0; Mod: GSM; Output Power 3 dB > AGC

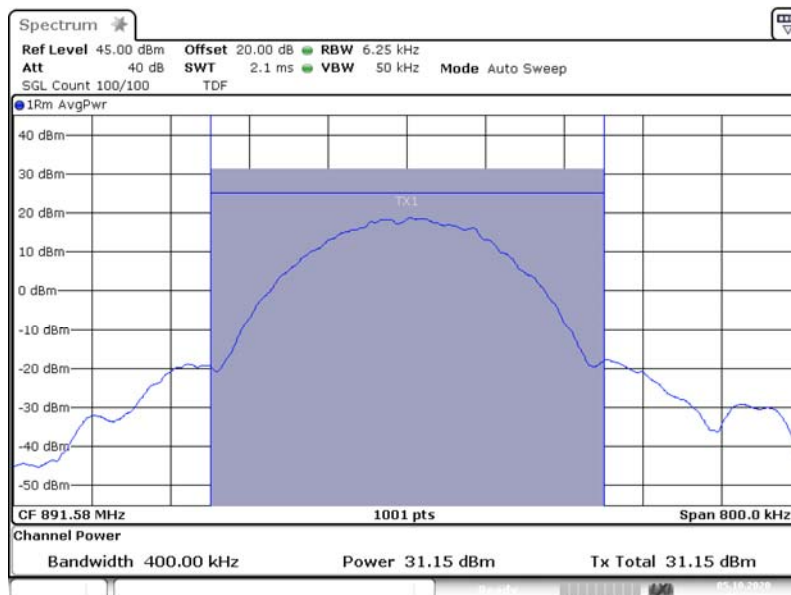

3.5.3 Power GSM Out +3 891.58000M



BUREAU
VERITAS

EfectiveECL-TA-20-004-V01.00

TA tests on Andrew CAP MX AC 6/7E/80-
85/17E/19/23/25T

4.1.5 TEST EQUIPMENT USED

- Conducted



EfectiveECL-TA-20-004-V01.00

TA tests on Andrew CAP MX AC 6/7E/80-
85/17E/19/23/25T

4.2 PEAK TO AVERAGE RATIO

Standard FCC Part 22, § 22.913

The test was performed according to:
ANSI C63.26

Test date: 2020-10-05


Environmental conditions: 22 ° C; 45 % r. F.

Test engineer: Thomas Hufnagel

4.2.1 TEST DESCRIPTION

This test case is intended to demonstrate compliance to the signal booster power and gain limits and requirements for industrial signal boosters per FCC § 22.913 and RSS-132 with subpart 5.4.

The EUT was connected to the test setup according to the following diagram:

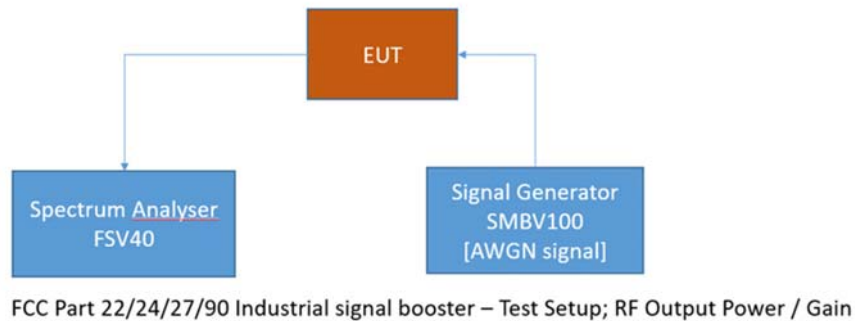

The attenuation of the measuring and stimulus path are known for each measured frequency and are considered.

The Spectrum Analyzer settings can be directly found in the measurement diagrams.



Effective ECL-TA-20-004-V01.00

TA tests on Andrew CAP MX AC 6/7E/80-85/17E/19/23/25T

4.2.2 TEST REQUIREMENTS/LIMITS

Part 27; Miscellaneous Wireless Communication Services

Subpart C – Technical standards

§ 22.913

Abstract § 22.913 from FCC:

(d) *Power measurement.* Measurement of the ERP of Cellular base transmitters and repeaters must be made using an average power measurement technique. The peak-to-average ratio (PAR) of the transmission must not exceed 13 dB.

Abstract RSS-132 from ISED:

RSS-132; 5.4 Transmitter Output Power and Equivalent Isotropically Radiated Power

In addition, the peak-to-average power ratio (PAPR) of the transmitter shall not exceed 13 dB for more than 0.1% of the time using a signal corresponding to the highest PAPR during periods of continuous transmission.

4.2.3 TEST PROTOCOL

| Band 5 CELL 850, downlink | | | | | | |
|----------------------------------|--------------------|------------------------|--------------------------|------------------|------------------------|-----------------------------|
| Signal Type | Input Power | Frequency [MHz] | Input Power [dBm] | PAPR [dB] | Limit PAPR [dB] | Margin to Limit [dB] |
| Wideband | 0.3 dB < AGC | 881.50 | -2.1 | 8.8 | 13.0 | 4.2 |
| Wideband | 3 dB > AGC | 881.50 | 1.2 | 8.8 | 13.0 | 4.2 |
| Narrowband | 0.3 dB < AGC | 881.50 | -2.1 | 0.2 | 13.0 | 12.8 |
| Narrowband | 3 dB > AGC | 881.50 | 1.2 | 0.2 | 13.0 | 12.8 |

Remark: Please see next sub-clause for the measurement plot.




BUREAU
VERITAS

EffectiveECL-TA-20-004-V01.00

TA tests on Andrew CAP MX AC 6/7E/80-85/17E/19/23/25T

4.2.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")

Band: CELL 850; Frequency: 891.5800 MHz; Band Edge: f0; Mod: AWGN; PAPR 0.3 dB < AGC

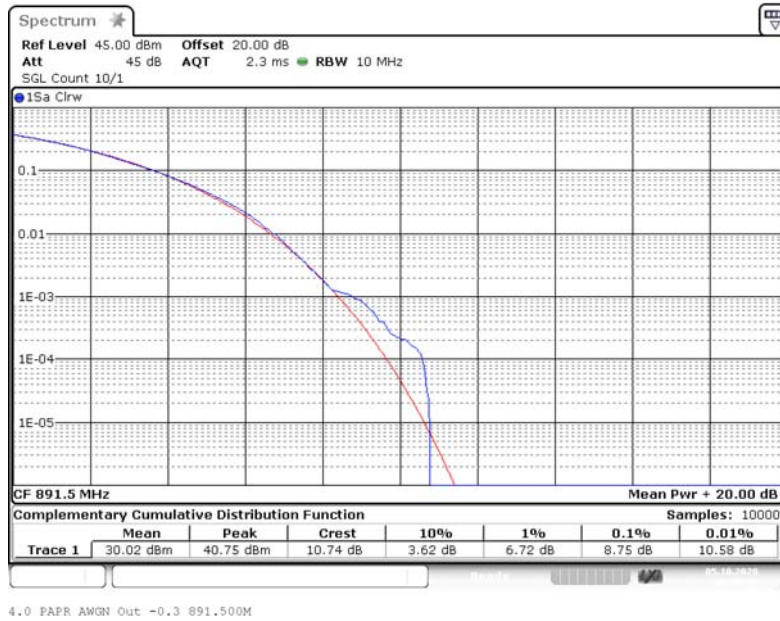

Band: CELL 850; Frequency: 891.5800 MHz; Band Edge: f0; Mod: AWGN; PAPR 3 dB > AGC






**BUREAU
VERITAS**


EffectiveECL-TA-20-004-V01.00

TA tests on Andrew CAP MX AC 6/7E/80-85/17E/19/23/25T

Band: CELL 850; Frequency: 881.5000 MHz; Band Edge: mid; Mod: GSM; PAPR 0.3 dB < AGC

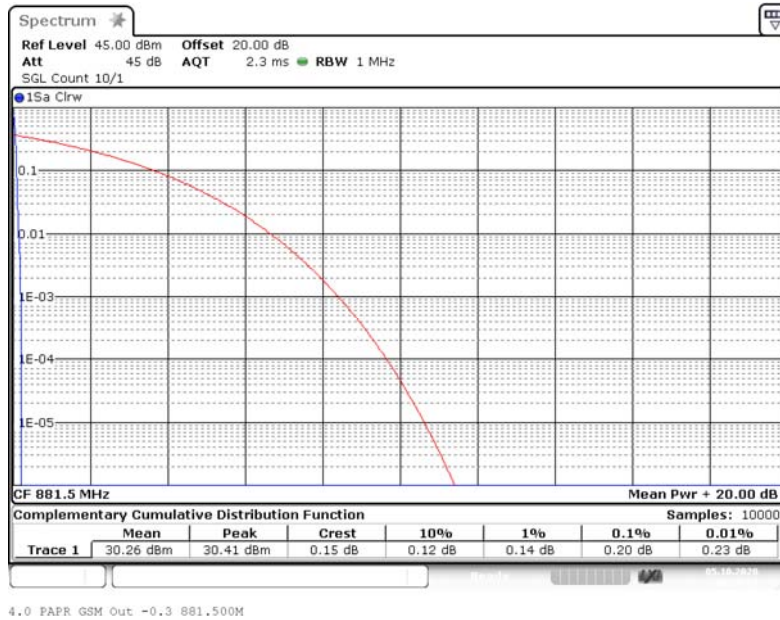

Band: CELL 850; Frequency: 881.5000 MHz; Band Edge: mid; Mod: GSM; PAPR 3 dB > AGC

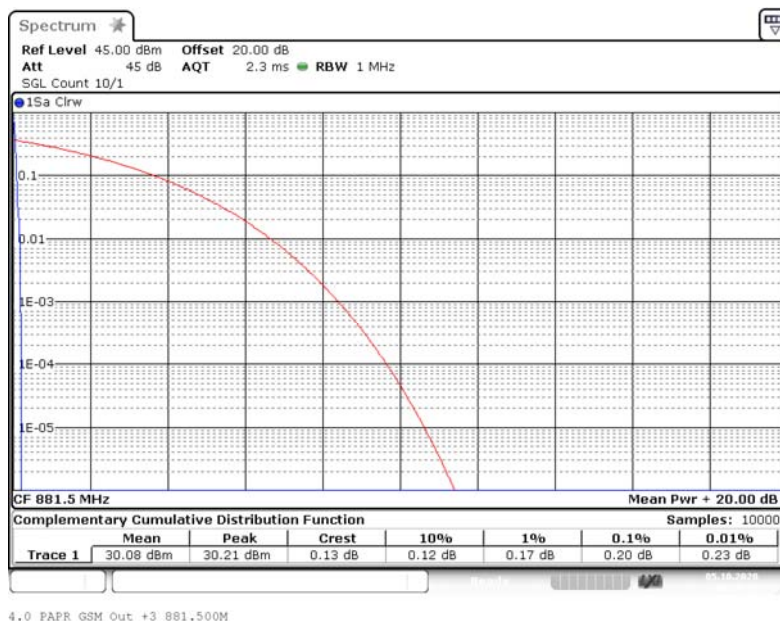

4.2.5 TEST EQUIPMENT USED

- Conducted

EfectiveECL-TA-20-004-V01.00

TA tests on Andrew CAP MX AC 6/7E/80-85/17E/19/23/25T

4.3 OCCUPIED BANDWIDTH/INPUT-VERSUS-OUTPUT SPECTRUM

Standard FCC Part 2.1049; Occupied Bandwidth

The test was performed according to:
ANSI C63.26, KDB 935210 D05 v01r04: 3.4

Test date: 2020-10-05


Environmental conditions: 22 ° C; 45 % r. F.

Test engineer: Thomas Hufnagel

4.3.1 TEST DESCRIPTION

This test case is intended to demonstrate compliance to the applicable conducted spurious emission limits per FCC § 2.1049, RSS-GEN with subpart 6.7 and RSS-131 with subpart 5.2.2

The EUT was connected to the test setups according to the following diagram:

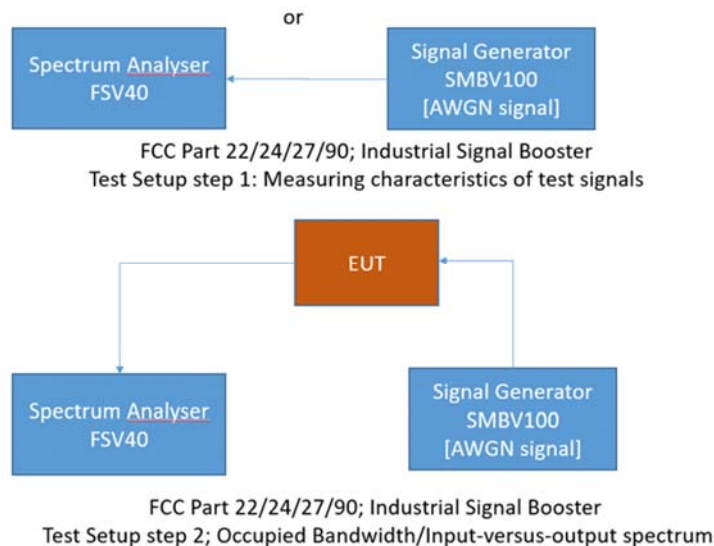

The attenuation of the measuring and stimulus path are known for each measured frequency and are considered.

The Spectrum Analyzer settings can be directly found in the measurement diagrams.



Effective ECL-TA-20-004-V01.00

TA tests on Andrew CAP MX AC 6/7E/80-85/17E/19/23/25T

4.3.2 TEST REQUIREMENTS/LIMITS

Abstract § 2.1049 from FCC:

FCC Part 2.1049; Occupied Bandwidth:

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.3 percent of the total mean power radiated by a given emission shall be measured under the following conditions as applicable:

(h) Transmitters employing digital modulation techniques—when modulated by an input signal such that its amplitude and symbol rate represent the maximum rated conditions under which the equipment will be operated. The signal shall be applied through any filter networks, pseudo-random generators or other devices required in normal service. Additionally, the occupied bandwidth shall be shown for operation with any devices used for modifying the spectrum when such devices are optional at the discretion of the user.

(i) Transmitters designed for other types of modulation—when modulated by an appropriate signal of sufficient amplitude to be representative of the type of service in which used. A description of the input signal should be supplied.

Abstract RSS-GEN from ISED:

RSS-GEN; 6.7 Occupied Bandwidth

The occupied bandwidth or the “99% emission bandwidth” is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs.

In some cases, the “x dB bandwidth” is required, which is defined as the frequency range between two points, one at the lowest frequency below and one at the highest frequency above the carrier frequency, at which the maximum power level of the transmitted emission is attenuated x dB below the maximum in-band power level of the modulated signal, where the two points are on the outskirts of the in-band emission.

The following conditions shall be observed for measuring the occupied bandwidth and x dB bandwidth:

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.



**BUREAU
VERITAS**

EffectiveECL-TA-20-004-V01.00

TA tests on Andrew CAP MX AC 6/7E/80-
85/17E/19/23/25T

- The detector of the spectrum analyzer shall be set to "Sample". However, a peak, or peak hold, may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or "Max Hold") may be necessary to determine the occupied / x dB bandwidth if the device is not transmitting continuously.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / x dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted.

For the 99% emission bandwidth, the trace data points are recovered and directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached, and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the occupied bandwidth (or the 99% emission bandwidth).

Abstract RSS-130 from ISED:

RSS-131; 5.2.2 Input-versus-output spectrum

The spectral growth of the 26 dB bandwidth of the output signal shall be less than 5% of the input signal spectrum.



Effective ECL-TA-20-004-V01.00

TA tests on Andrew CAP MX AC 6/7E/80-85/17E/19/23/25T

4.3.3 TEST PROTOCOL

| Band 5 CELL 850, downlink | | | | | | | |
|--------------------------------------|--------------------|-------------------------------|------------------------------------|---|---------------------------------------|---|------------------------------|
| Signal Type | Input Power | Signal Frequency [MHz] | Occupied Bandwidth SG [kHz] | Occupied Bandwidth Booster [kHz] | Delta Occupied Bandwidth [kHz] | Limit Delta Occupied Bandwidth [kHz] | Margin to Limit [kHz] |
| Wideband | 0.3 dB < AGC | 881.50 | 4335.3 | 4334.1 | 1.2 | 205.0 | 203.8 |
| Wideband | 3 dB > AGC | 881.50 | 4334.1 | 4334.1 | 0.0 | 205.0 | 205.0 |
| Narrowband | 0.3 dB < AGC | 881.50 | 316.4 | 317.0 | 0.6 | 10.0 | 9.4 |
| Narrowband | 3 dB > AGC | 881.50 | 320.5 | 319.4 | 1.1 | 10.0 | 8.9 |

Remark: Please see next sub-clause for the measurement plot.




BUREAU VERITAS

EffectiveECL-TA-20-004-V01.00


TA tests on Andrew CAP MX AC 6/7E/80-85/17E/19/23/25T

4.3.4 MEASUREMENT PLOT

Band: CELL 850; Frequency: 881.5000 MHz; Band Edge: mid; Mod: AWGN; Input OCBW 0.3 dB < AGC

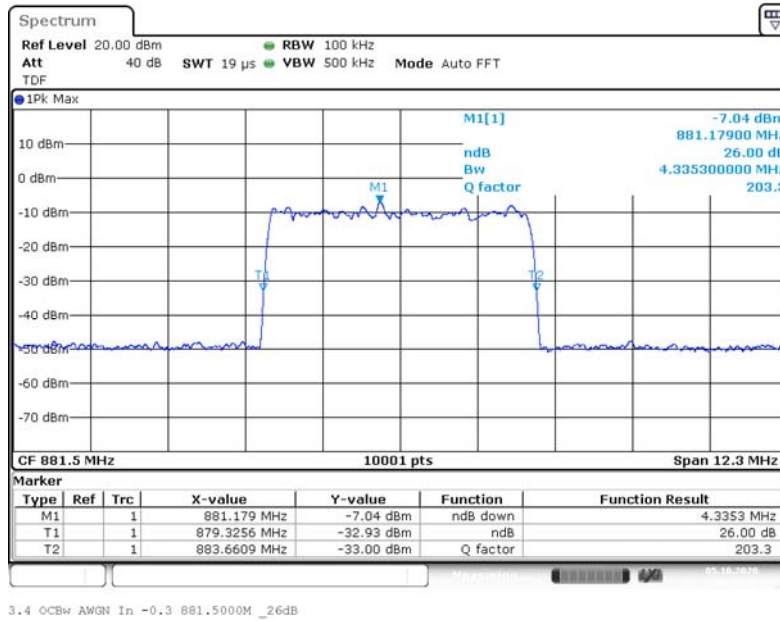

Input Signal

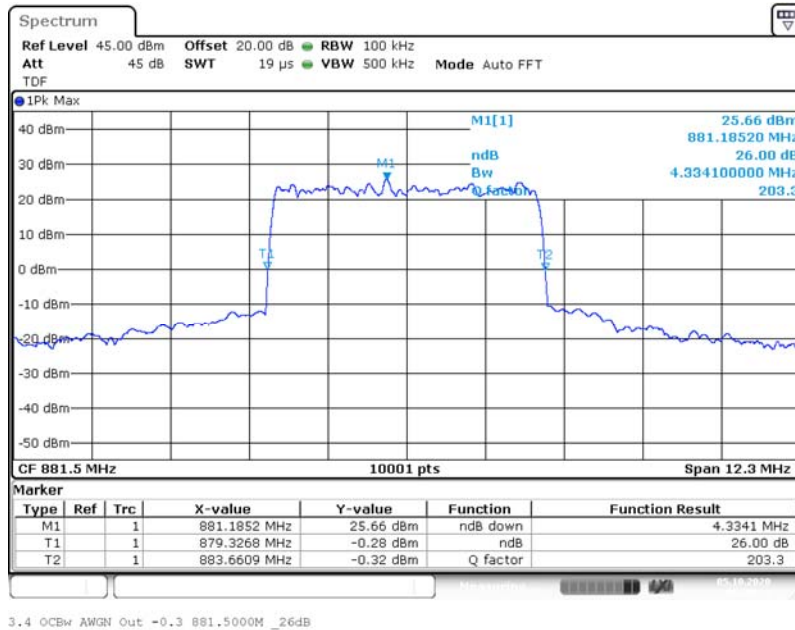

Output Signal




BUREAU
VERITAS


EffectiveECL-TA-20-004-V01.00

TA tests on Andrew CAP MX AC 6/7E/80-85/17E/19/23/25T

Band: CELL 850; Frequency: 881.5000 MHz; Band Edge: mid; Mod: AWGN; Input OCBW 3 dB > AGC

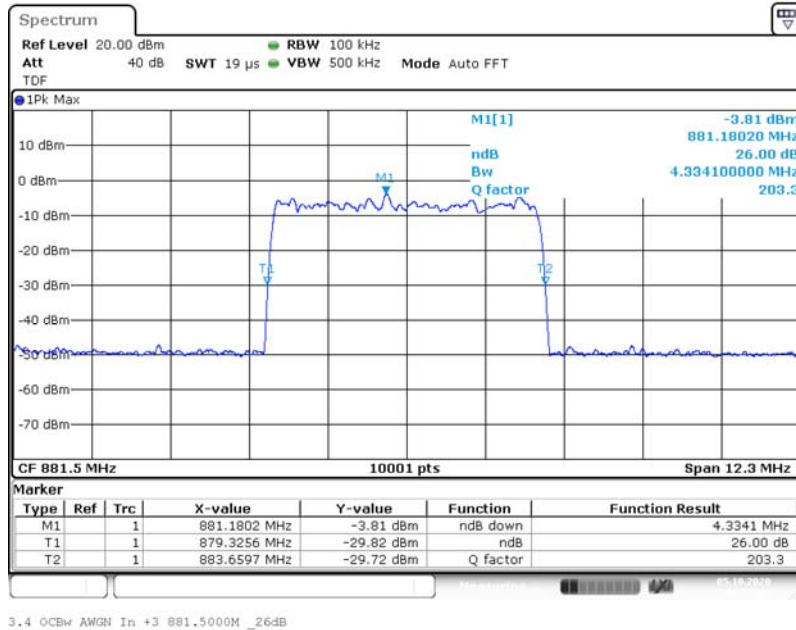

Input Signal

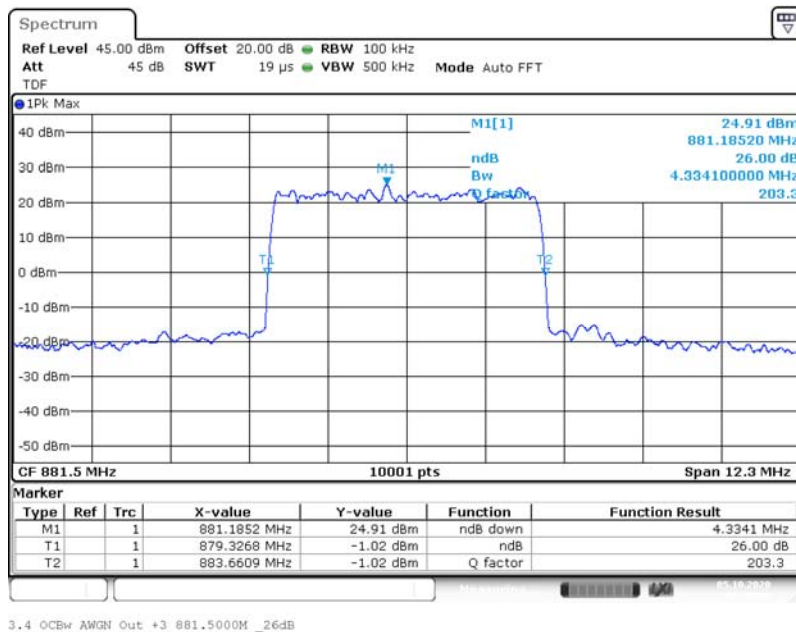

Output Signal




**BUREAU
VERITAS**


EffectiveECL-TA-20-004-V01.00

TA tests on Andrew CAP MX AC 6/7E/80-85/17E/19/23/25T

Band: CELL 850; Frequency: 881.5000 MHz; Band Edge: mid; Mod: GSM; Input OCBW 0.3 dB < AGC

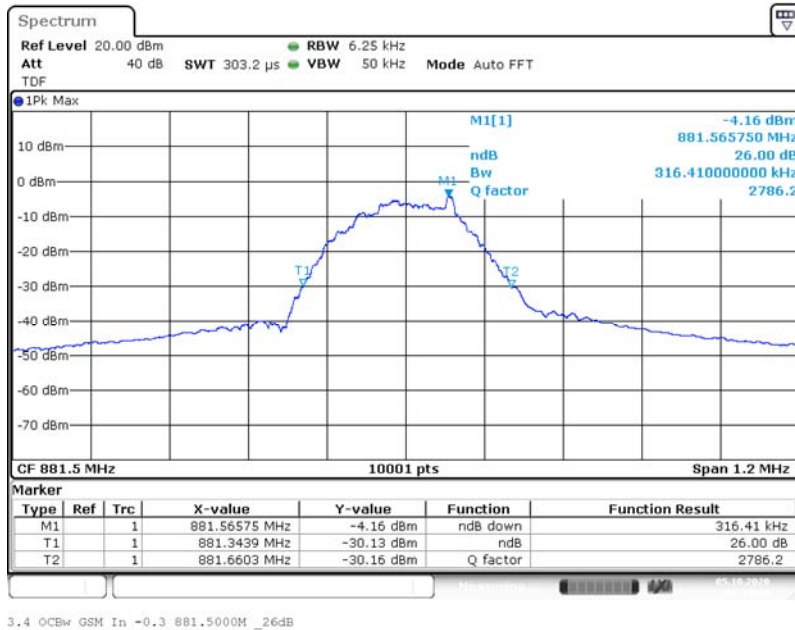

Input Signal

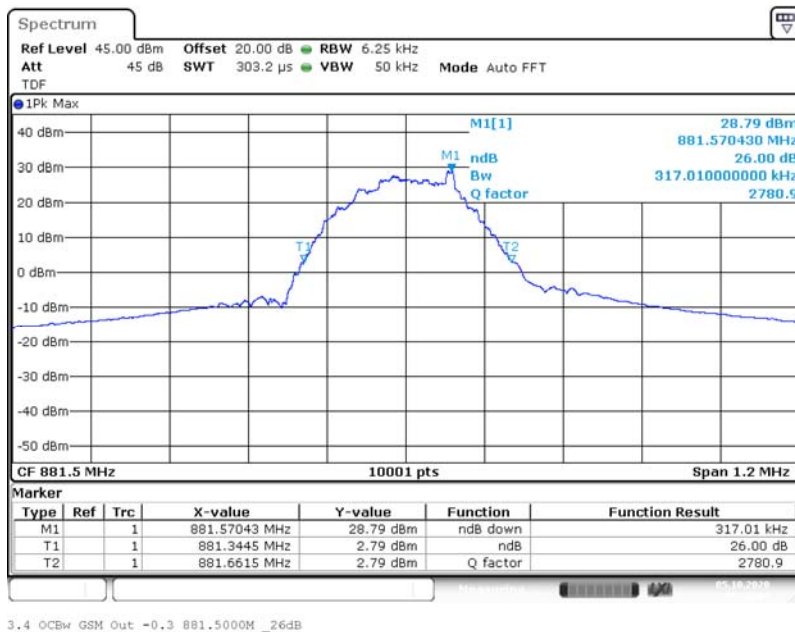

Output Signal




**BUREAU
VERITAS**


EfectiveECL-TA-20-004-V01.00

TA tests on Andrew CAP MX AC 6/7E/80-85/17E/19/23/25T

Band: CELL 850; Frequency: 881.5000 MHz; Band Edge: mid; Mod: GSM; Input OCBW 3 dB > AGC

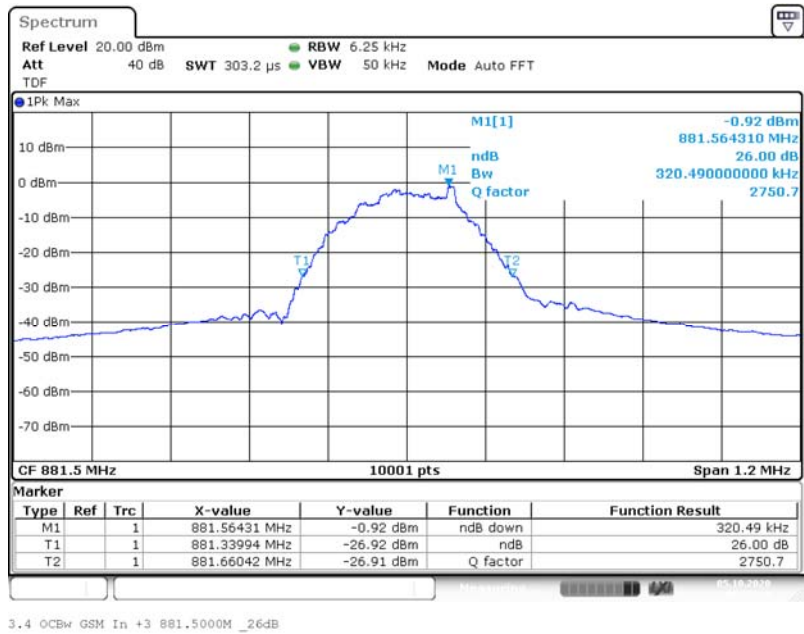

Input Signal

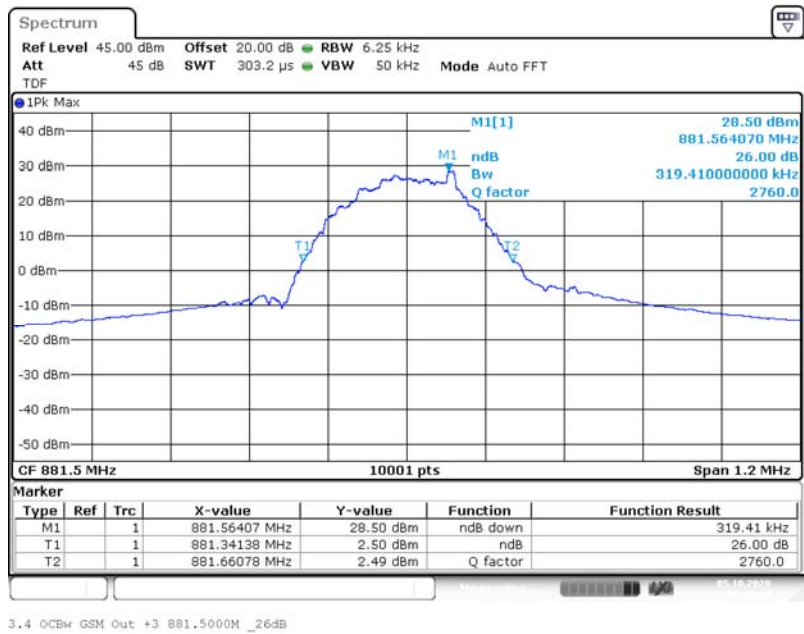

Output Signal

4.3.5 TEST EQUIPMENT USED

- Conducted



Effective ECL-TA-20-004-V01.00

TA tests on Andrew CAP MX AC 6/7E/80-85/17E/19/23/25T

4.4 CONDUCTED SPURIOUS EMISSIONS AT ANTENNA TERMINALS

Standard FCC Part § 2.1051, § 27.53

The test was performed according to:
ANSI C63.26, KDB 935210 D05 v01r04: 3.6

Test date: 2020-09-09


Environmental conditions: 24 ° C; 43 % r. F.

Test engineer: Thomas Hufnagel

4.4.1 TEST DESCRIPTION

This test case is intended to demonstrate compliance to the signal booster power and gain limits and requirements for industrial signal boosters per FCC § 2.1051, FCC § 22.917, RSS-GEN with subpart 6.13 and RSS-132 with subpart 5.2.2.

The EUT was connected to the test setup according to the following diagram:

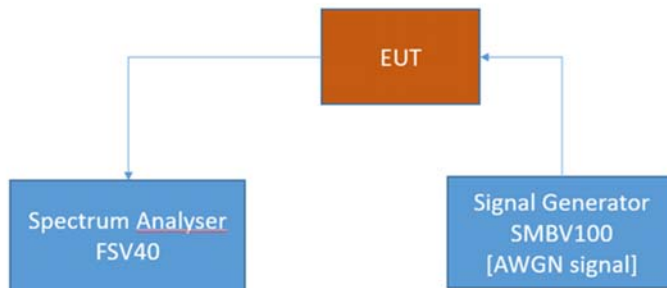

FCC Part 22/24/27/90 Industrial signal booster – Test Setup; RF Output Power / Gain

The attenuation of the measuring and stimulus path are known for each measured frequency and are considered.

The Spectrum Analyser settings can be directly found in the measurement diagrams.



Effective ECL-TA-20-004-V01.00

TA tests on Andrew CAP MX AC 6/7E/80-85/17E/19/23/25T

4.4.2 TEST REQUIREMENTS/LIMITS

Abstract § 2.1051 from FCC:

FCC Part 2.1051; Measurement required: Spurious emissions at antenna terminal:

The radio frequency voltage or powers generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of each harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in § 2.1049 as appropriate. The magnitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be specified.

Abstract § 22.917 FCC:

Part 22, Subpart H – Cellular Radiotelephone Service; Band 5

§ 22.917 Emission limitations for cellular equipment.

The rules in this section govern the spectral characteristics of emissions in the Cellular Radiotelephone Service.

(a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

Abstract RSS-132 from ISED:

RSS-132; 5.5 Transmitter Unwanted Emissions

Mobile and base station equipment shall comply with the limits in (i) and (ii) below.

(i) In the first 1.0 MHz band immediately outside and adjacent to each of the sub-bands specified in Section 5.1, the power of emissions per any 1% of the occupied bandwidth shall be attenuated (in dB) below the transmitter output power P (dBW) by at least $43 + 10 \log_{10} p$ (watts).

(ii)

After the first 1.0 MHz immediately outside and adjacent to each of the sub-bands, the power of emissions in any 100 kHz bandwidth shall be attenuated (in dB) below the transmitter output power P (dBW) by at least $43 + 10 \log_{10} p$ (watts). If the measurement is performed using 1% of the occupied bandwidth, power integration over 100 kHz is required.



EffectiveECL-TA-20-004-V01.00

TA tests on Andrew CAP MX AC 6/7E/80-85/17E/19/23/25T

4.4.3 TEST PROTOCOL

| Band 5, CELL 850, downlink | | | | | | | |
|-----------------------------------|--------------------|-----------------------------|-----------------------------|-----------------|------------------|--------------------|-----------------------------|
| Test Frequency | Signal Type | Spurious Freq. [MHz] | Spurious Level [dBm] | Detector | RBW [kHz] | Limit [dBm] | Margin to Limit [dB] |
| low | Wideband | 0.0273701 | -59.8 | RMS | 1 | -33 | 26.8 |
| low | Wideband | 0.0524996 | -50.8 | RMS | 10 | -23 | 27.8 |
| low | Wideband | 68.5209 | -45.5 | RMS | 100 | -13 | 32.5 |
| low | Wideband | 707.1462 | -44.3 | RMS | 100 | -13 | 31.3 |
| low | Wideband | 868.8125 | -37.5 | RMS | 10 | -23 | 14.5 |
| low | Wideband | 894.1025 | -55.8 | RMS | 10 | -23 | 32.8 |
| low | Wideband | 955.298 | -42.2 | RMS | 100 | -13 | 29.2 |
| low | Wideband | 6970.9 | -31.2 | RMS | 1000 | -13 | 18.2 |
| mid | Wideband | 0.0272473 | -61.4 | RMS | 1 | -33 | 28.4 |
| mid | Wideband | 0.0624979 | -52.5 | RMS | 10 | -23 | 29.5 |
| mid | Wideband | 119.4155 | -45.4 | RMS | 100 | -13 | 32.4 |
| mid | Wideband | 708.846 | -43.8 | RMS | 100 | -13 | 30.8 |
| mid | Wideband | 868.4778 | -55.9 | RMS | 10 | -23 | 32.9 |
| mid | Wideband | 894.2024 | -55.6 | RMS | 10 | -23 | 32.6 |
| mid | Wideband | 935.7581 | -43.6 | RMS | 100 | -13 | 30.6 |
| mid | Wideband | 6901.9 | -30.8 | RMS | 1000 | -13 | 17.8 |
| high | Wideband | 0.0487098 | -60.8 | RMS | 1 | -33 | 27.8 |
| high | Wideband | 0.0524996 | -53.5 | RMS | 10 | -23 | 30.5 |
| high | Wideband | 117.6657 | -45.1 | RMS | 100 | -13 | 32.1 |
| high | Wideband | 809.532 | -44.4 | RMS | 100 | -13 | 31.4 |
| high | Wideband | 865.5544 | -54.9 | RMS | 10 | -23 | 31.9 |
| high | Wideband | 894.1475 | -38.3 | RMS | 10 | -23 | 15.3 |
| high | Wideband | 940.3058 | -43.4 | RMS | 100 | -13 | 30.4 |
| high | Wideband | 6795.4 | -31.2 | RMS | 1000 | -13 | 18.2 |



EfectiveECL-TA-20-004-V01.00

TA tests on Andrew CAP MX AC 6/7E/80-85/17E/19/23/25T

| Band 5, CELL 850, downlink | | | | | | | |
|-----------------------------------|--------------------|-----------------------------|-----------------------------|-----------------|------------------|--------------------|-----------------------------|
| Test Frequency | Signal Type | Spurious Freq. [MHz] | Spurious Level [dBm] | Detector | RBW [kHz] | Limit [dBm] | Margin to Limit [dB] |
| low | Narrowband | 0.0150824 | -61.5 | RMS | 1 | -33 | 28.5 |
| low | Narrowband | 0.1524829 | -55.3 | RMS | 10 | -23 | 32.3 |
| low | Narrowband | 120.9153 | -45.4 | RMS | 100 | -13 | 32.4 |
| low | Narrowband | 710.0458 | -43.6 | RMS | 100 | -13 | 30.6 |
| low | Narrowband | 868.8775 | -52.8 | RMS | 10 | -23 | 29.8 |
| low | Narrowband | 894.1974 | -53.4 | RMS | 10 | -23 | 30.4 |
| low | Narrowband | 942.2548 | -43.3 | RMS | 100 | -13 | 30.3 |
| low | Narrowband | 6883.4 | -30.7 | RMS | 1000 | -13 | 17.7 |
| mid | Narrowband | 0.011519 | -60.9 | RMS | 1 | -33 | 27.9 |
| mid | Narrowband | 0.0524996 | -54.9 | RMS | 10 | -23 | 31.9 |
| mid | Narrowband | 122.3152 | -44.8 | RMS | 100 | -13 | 31.8 |
| mid | Narrowband | 708.4461 | -44.0 | RMS | 100 | -13 | 31.0 |
| mid | Narrowband | 864.8498 | -56.5 | RMS | 10 | -23 | 33.5 |
| mid | Narrowband | 894.2024 | -55.0 | RMS | 10 | -23 | 32.0 |
| mid | Narrowband | 953.8988 | -43.7 | RMS | 100 | -13 | 30.7 |
| mid | Narrowband | 6958.4 | -31.0 | RMS | 1000 | -13 | 18.0 |
| high | Narrowband | 0.0126658 | -61.5 | RMS | 1 | -33 | 28.5 |
| high | Narrowband | 0.1574821 | -54.5 | RMS | 10 | -23 | 31.5 |
| high | Narrowband | 67.321 | -45.1 | RMS | 100 | -13 | 32.1 |
| high | Narrowband | 810.9818 | -43.6 | RMS | 100 | -13 | 30.6 |
| high | Narrowband | 868.8125 | -51.5 | RMS | 10 | -23 | 28.5 |
| high | Narrowband | 894.1475 | -52.2 | RMS | 10 | -23 | 29.2 |
| high | Narrowband | 937.1574 | -43.8 | RMS | 100 | -13 | 30.8 |
| high | Narrowband | 6926.4 | -30.9 | RMS | 1000 | -13 | 17.9 |

Remark: Please see next sub-clause for the measurement plot.

General considerations concerning the measurement plots:

The measuring bandwidth of 100 kHz was chosen according the test requirements except at the band edges: At the band edges reducing of measurement bandwidth was necessary to prevent overlaying the RF-signal over the spurious emissions.

Also outside the downlink frequency band at lower frequencies the measurement bandwidths were reduced to have the possibility to record the spurious emissions at these lower frequencies.

At frequencies where measuring bandwidths were reduced also the border lines were reduced according the given formula:

$$p_{RBWreduced} [dBm] = 10 * \log(RBWreduced [kHz] - 100 kHz) + p_{RBW 100 kHz} [dBm]$$

Hereby "p" are the border lines' values.




BUREAU
VERITAS

EffectiveECL-TA-20-004-V01.00


TA tests on Andrew CAP MX AC 6/7E/80-
85/17E/19/23/25T

4.4.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")

Frequency Band = Band 5, Test Frequency = low, Direction = RF downlink, Signal Type = Wideband

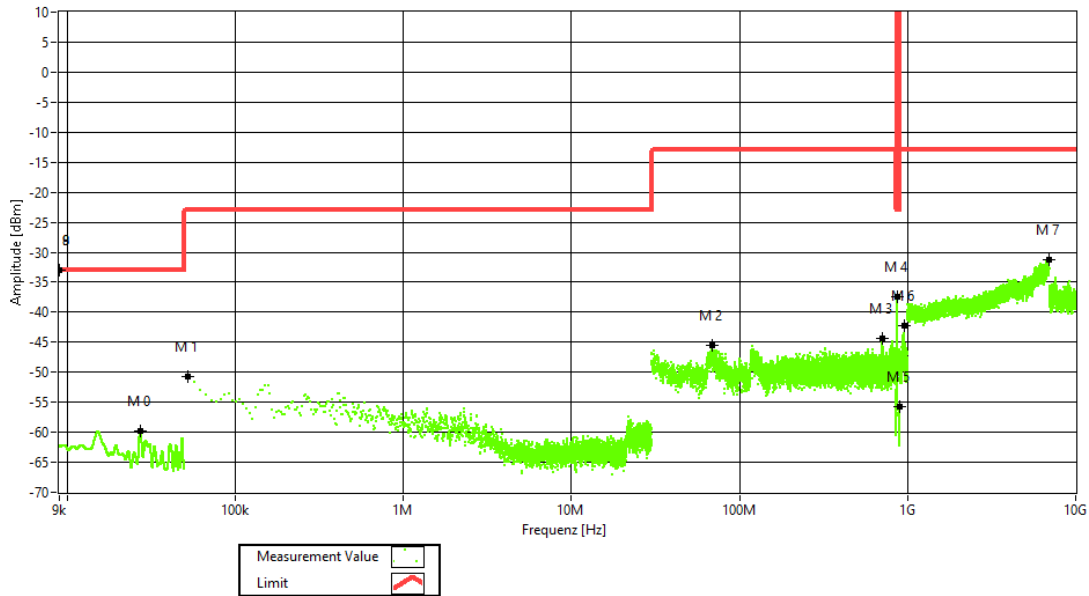

Frequency Band = Band 5, Test Frequency = mid, Direction = RF downlink, Signal Type = Wideband

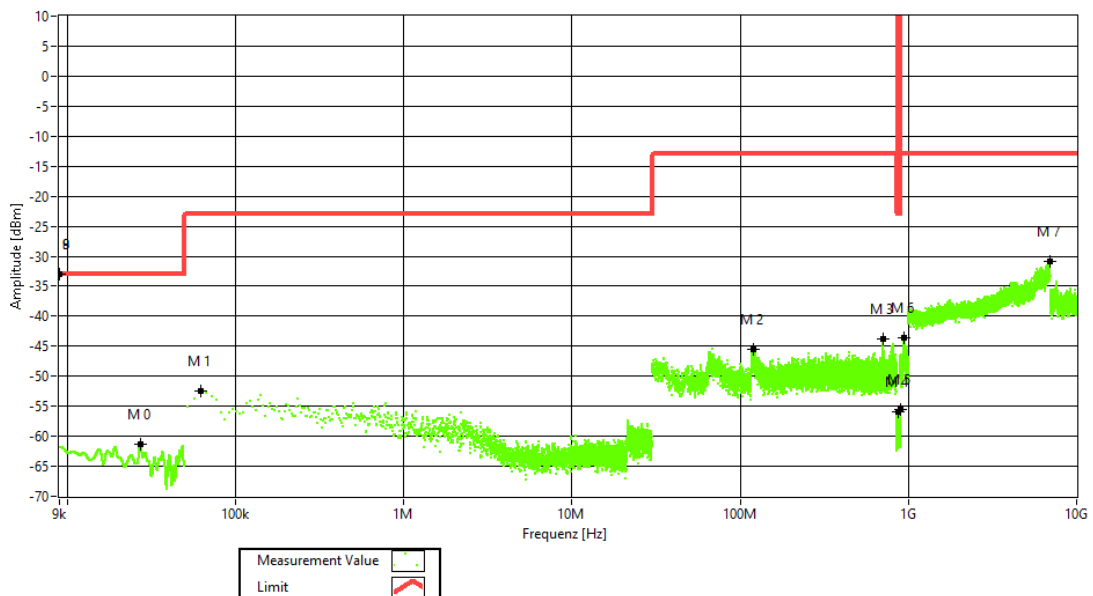




BUREAU
VERITAS

EffectiveECL-TA-20-004-V01.00

TA tests on Andrew CAP MX AC 6/7E/80-
85/17E/19/23/25T

Frequency Band = Band 5, Test Frequency = high, Direction = RF downlink, Signal Type =
Wideband

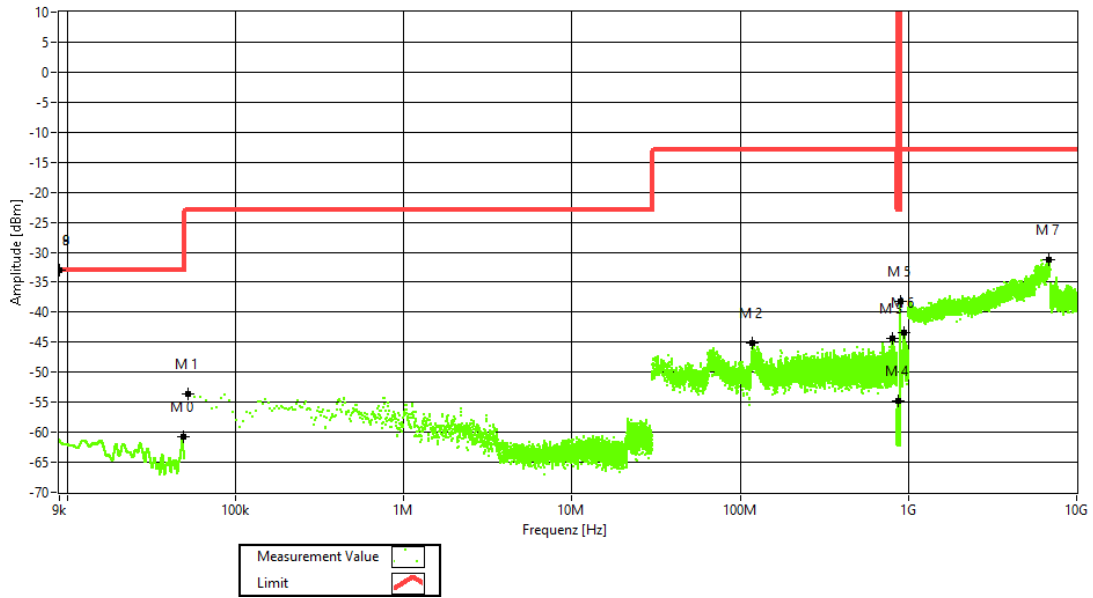




BUREAU
VERITAS


EffectiveECL-TA-20-004-V01.00

TA tests on Andrew CAP MX AC 6/7E/80-
85/17E/19/23/25T

Frequency Band = Band 5, Test Frequency = low, Direction = RF downlink, Signal Type = Narrowband

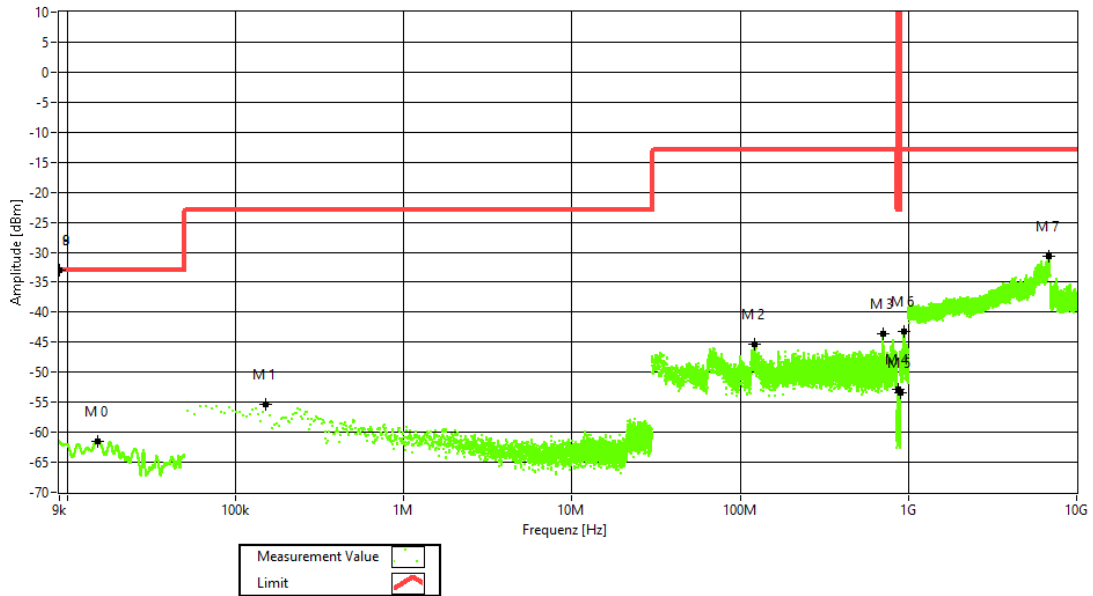

Frequency Band = Band 5, Test Frequency = mid, Direction = RF downlink, Signal Type = Narrowband

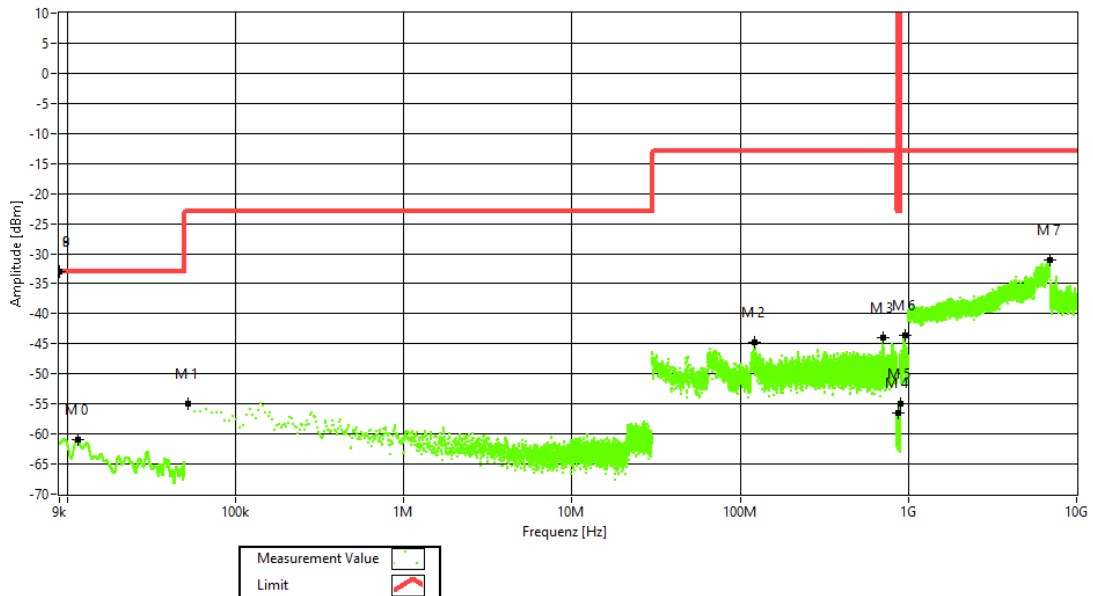




BUREAU
VERITAS

EffectiveECL-TA-20-004-V01.00

TA tests on Andrew CAP MX AC 6/7E/80-
85/17E/19/23/25T

Frequency Band = Band 5, Test Frequency = high, Direction = RF downlink, Signal Type =
Narrowband

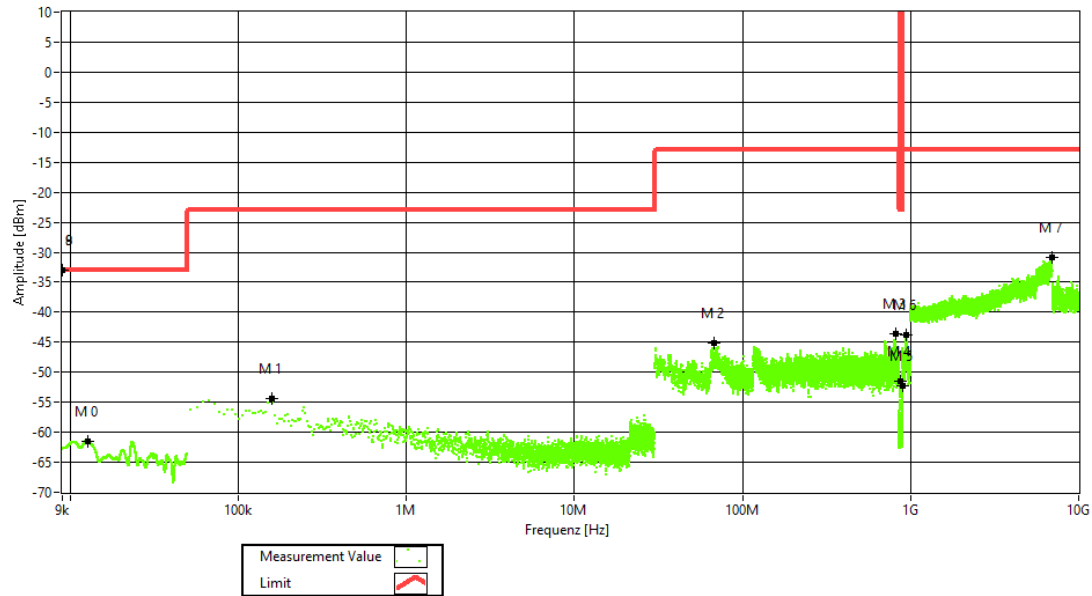

4.4.5 TEST EQUIPMENT USED

- Conducted



Effective ECL-TA-20-004-V01.00

TA tests on Andrew CAP MX AC 6/7E/80-85/17E/19/23/25T

4.5 OUT-OF-BAND EMISSION LIMITS

Standard FCC Part § 2.1051, § 27.53

The test was performed according to:
ANSI C63.26, KDB 935210 D05 v01r04: 3.6

Test date: 2020-10-05


Environmental conditions: 22 ° C; 45 % r. F.

Test engineer: Thomas Hufnagel

4.5.1 TEST DESCRIPTION

This test case is intended to demonstrate compliance to the out-of-band emission limit for industrial signal boosters. The limits itself come from the applicable rule part for each operating band per FCC § 2.1051, FCC § 22.917, RSS-GEN with subpart 6.13 and RSS-132 with subpart 5.2.2.

The EUT was connected to the test setup according to the following diagram:

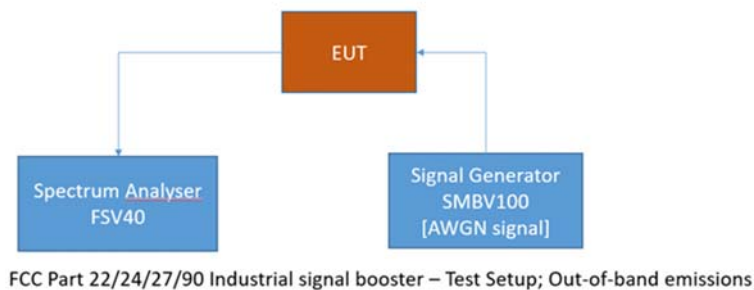

The attenuation of the measuring and stimulus path are known for each measured frequency and are considered.

The Spectrum Analyser settings can be directly found in the measurement diagrams.



Effective ECL-TA-20-004-V01.00

TA tests on Andrew CAP MX AC 6/7E/80-85/17E/19/23/25T

4.5.2 TEST REQUIREMENTS/LIMITS

Abstract § 2.1051 from FCC:

FCC Part 2.1051; Measurement required: Spurious emissions at antenna terminal:

The radio frequency voltage or powers generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of each harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in § 2.1049 as appropriate. The magnitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be specified.

Abstract § 22.917 FCC:

Part 22, Subpart H – Cellular Radiotelephone Service; Band 5

§ 22.917 Emission limitations for cellular equipment.

The rules in this section govern the spectral characteristics of emissions in the Cellular Radiotelephone Service.

(a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

Abstract RSS-132 from ISED:

RSS-132; 5.5 Transmitter Unwanted Emissions

Mobile and base station equipment shall comply with the limits in (i) and (ii) below.

(i) In the first 1.0 MHz band immediately outside and adjacent to each of the sub-bands specified in Section 5.1, the power of emissions per any 1% of the occupied bandwidth shall be attenuated (in dB) below the transmitter output power P (dBW) by at least $43 + 10 \log_{10} p$ (watts).

(ii)

After the first 1.0 MHz immediately outside and adjacent to each of the sub-bands, the power of emissions in any 100 kHz bandwidth shall be attenuated (in dB) below the transmitter output power P (dBW) by at least $43 + 10 \log_{10} p$ (watts). If the measurement is performed using 1% of the occupied bandwidth, power integration over 100 kHz is required.



Effective ECL-TA-20-004-V01.00

TA tests on Andrew CAP MX AC 6/7E/80-85/17E/19/23/25T

4.5.3 TEST PROTOCOL

| Band 5, downlink, Number of input signals = 1 | | | | | | | |
|--|--------------------|------------------|-------------------------------|--------------------------|--|--------------------------------------|-----------------------------|
| Signal Type | Input Power | Band Edge | Signal Frequency [MHz] | Input Power [dBm] | Maximum Out-of-band Power [dBm] | Limit Out-of-band Power [dBm] | Margin to Limit [dB] |
| Wideband | -0.3 dB < AGC | upper | 891.50 | -2.7 | -30.6 | -13 | 17.6 |
| Wideband | 3 dB > AGC | upper | 891.50 | 0.6 | -31.5 | -13 | 18.5 |
| Narrowband | -0.3 dB < AGC | upper | 893.80 | -2.9 | -30.6 | -13 | 17.6 |
| Narrowband | 3 dB > AGC | upper | 893.80 | 0.4 | -30.6 | -13 | 17.6 |
| Wideband | -0.3 dB < AGC | lower | 871.50 | -1.9 | -31.0 | -13 | 18.0 |
| Wideband | 3 dB > AGC | lower | 871.50 | 1.4 | -31.3 | -13 | 18.3 |
| Narrowband | -0.3 dB < AGC | lower | 869.20 | -2.3 | -30.2 | -13 | 17.2 |
| Narrowband | 3 dB > AGC | lower | 869.20 | 1.0 | -30.4 | -13 | 17.4 |

| Band 5, downlink, Number of input signals = 2 | | | | | | | | |
|--|--------------------|------------------|----------------------------------|----------------------------------|--------------------------|--|--------------------------------------|-----------------------------|
| Signal Type | Input Power | Band Edge | Signal Frequency f1 [MHz] | Signal Frequency f2 [MHz] | Input Power [dBm] | Maximum Out-of-band Power [dBm] | Limit Out-of-band Power [dBm] | Margin to Limit [dB] |
| WB | -0.3 dB < AGC | upper | 891.50 | 889.00 | -2.7 | -33.6 | -13 | 20.6 |
| WB | 3 dB > AGC | upper | 891.50 | 889.00 | 0.6 | -34.1 | -13 | 21.1 |
| NB | -0.3 dB < AGC | upper | 893.80 | 893.60 | -2.9 | -31.0 | -13 | 18.0 |
| NB | 3 dB > AGC | upper | 893.80 | 893.60 | 0.4 | -31.3 | -13 | 18.3 |
| WB | -0.3 dB < AGC | lower | 871.50 | 874.00 | -1.9 | -33.9 | -13 | 20.9 |
| WB | 3 dB > AGC | lower | 871.50 | 874.00 | 1.4 | -34.3 | -13 | 21.3 |
| NB | -0.3 dB < AGC | lower | 869.20 | 869.40 | -2.3 | -32.2 | -13 | 19.2 |
| NB | 3 dB > AGC | lower | 869.20 | 869.40 | 1.0 | -31.9 | -13 | 18.9 |

Remark: Please see next sub-clause for the measurement plot.

Explanations concerning table with two input signals:

“WB” means Wideband.
 “NB” means Narrowband.




BUREAU
VERITAS

EffectiveECL-TA-20-004-V01.00

TA tests on Andrew CAP MX AC 6/7E/80-
85/17E/19/23/25T

4.5.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")

Band: CELL 850; Frequency: 869.0000 MHz to 894.0000 MHz; Band Edge: upper; Mod: AWGN;
Input Power = 0.3 dB < AGC; Number of signals 1

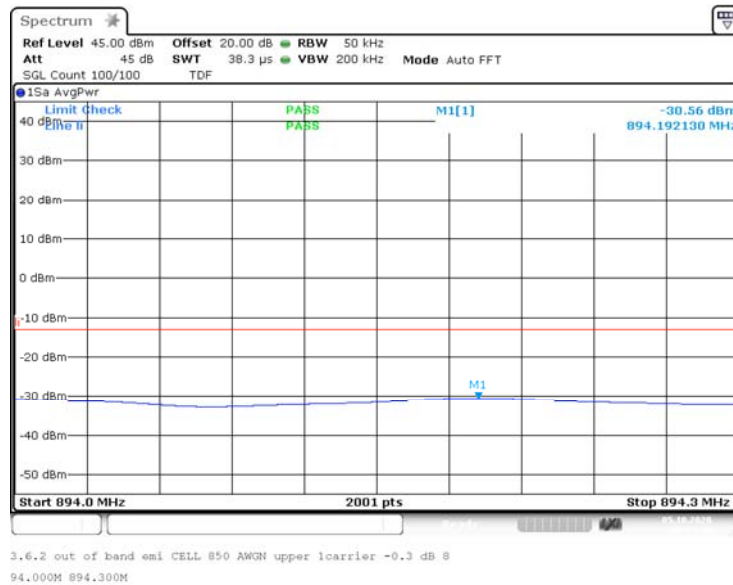

Band: CELL 850; Frequency: 869.0000 MHz to 894.0000 MHz; Band Edge: upper; Mod: AWGN;
Input Power = 3 dB > AGC; Number of signals 1






BUREAU
VERITAS


EffectiveECL-TA-20-004-V01.00

TA tests on Andrew CAP MX AC 6/7E/80-85/17E/19/23/25T

Band: CELL 850; Frequency: 869.0000 MHz to 894.0000 MHz; Band Edge: upper; Mod: GSM; Input Power = 0.3 dB < AGC; Number of signals 1

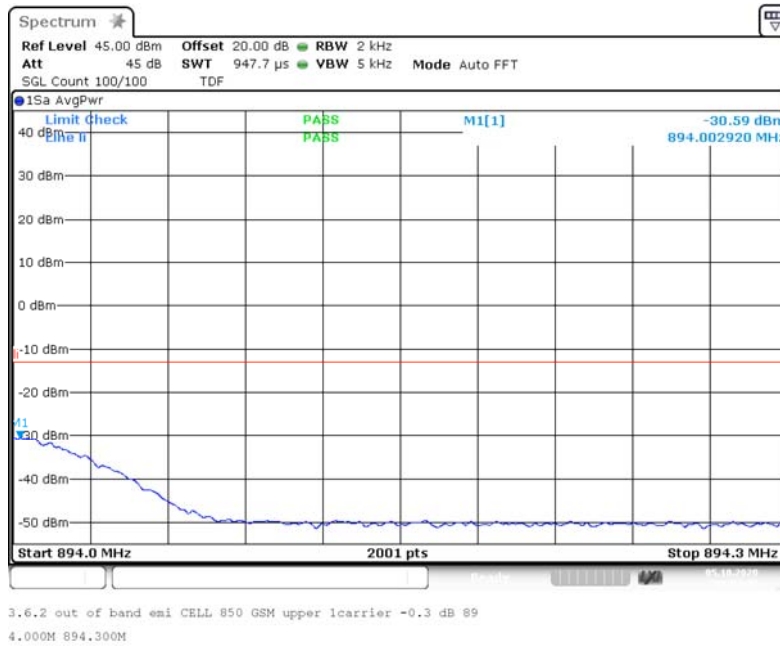

Band: CELL 850; Frequency: 869.0000 MHz to 894.0000 MHz; Band Edge: upper; Mod: GSM; Input Power = 3 dB > AGC; Number of signals 1

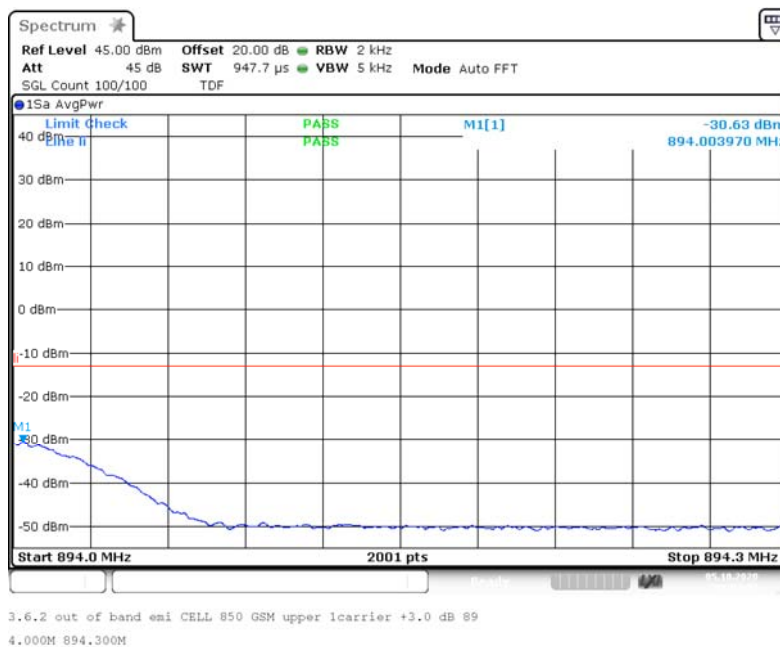




BUREAU
VERITAS


EffectiveECL-TA-20-004-V01.00

TA tests on Andrew CAP MX AC 6/7E/80-85/17E/19/23/25T

Band: CELL 850; Frequency: 869.0000 MHz to 894.0000 MHz; Band Edge: lower; Mod: AWGN;
Input Power = 0.3 dB < AGC; Number of signals 1

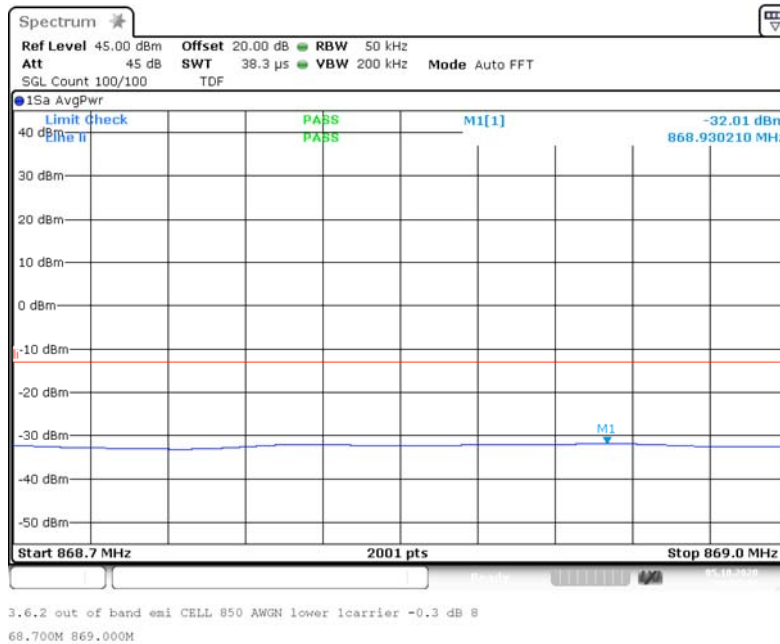

Band: CELL 850; Frequency: 869.0000 MHz to 894.0000 MHz; Band Edge: lower; Mod: AWGN;
Input Power = 3 dB > AGC; Number of signals 1

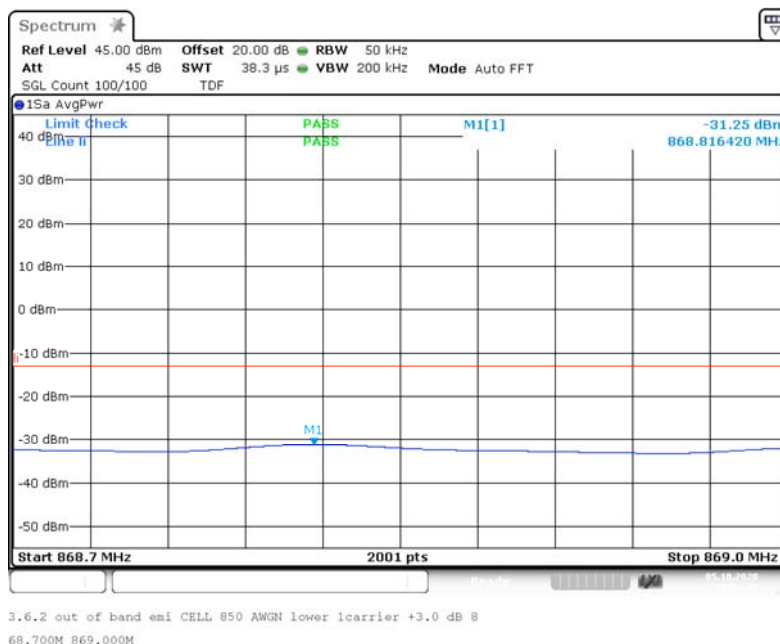




BUREAU
VERITAS


EffectiveECL-TA-20-004-V01.00

TA tests on Andrew CAP MX AC 6/7E/80-85/17E/19/23/25T

Band: CELL 850; Frequency: 869.0000 MHz to 894.0000 MHz; Band Edge: lower; Mod: GSM; Input Power = 0.3 dB < AGC; Number of signals 1

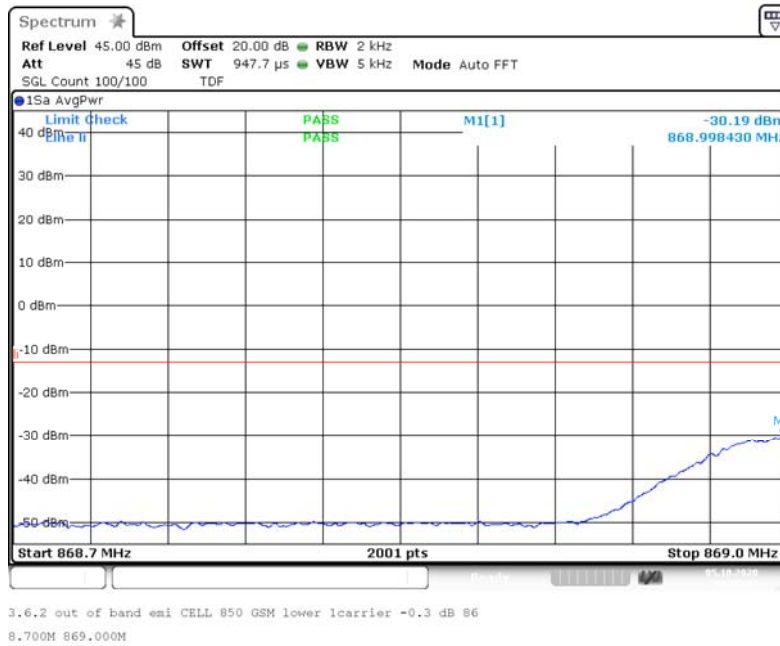

Band: CELL 850; Frequency: 869.0000 MHz to 894.0000 MHz; Band Edge: lower; Mod: GSM; Input Power = 3 dB > AGC; Number of signals 1

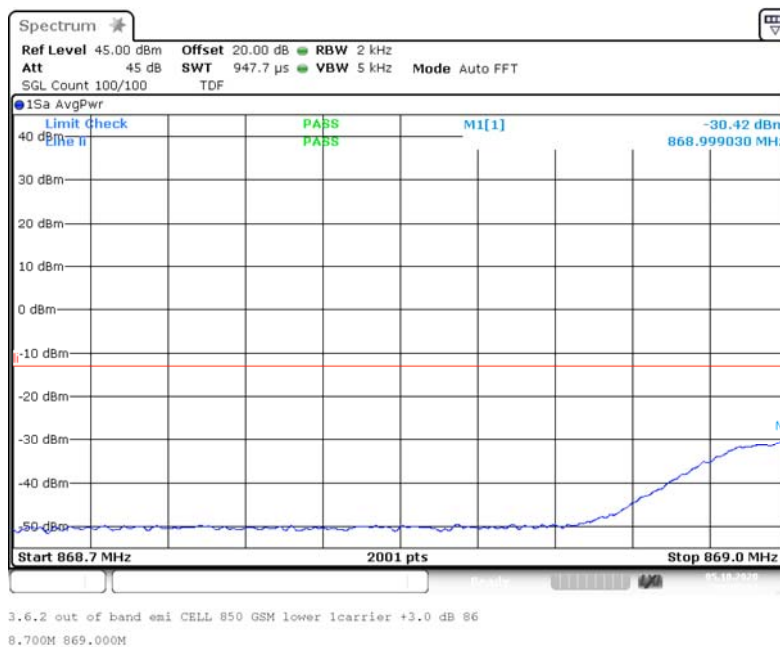




BUREAU
VERITAS

EffectiveECL-TA-20-004-V01.00


TA tests on Andrew CAP MX AC 6/7E/80-
85/17E/19/23/25T

Band: CELL 850; Frequency: 869.0000 MHz to 894.0000 MHz; Band Edge: upper; Mod: AWGN;
Input Power = 0.3 dB < AGC; Number of signals 2

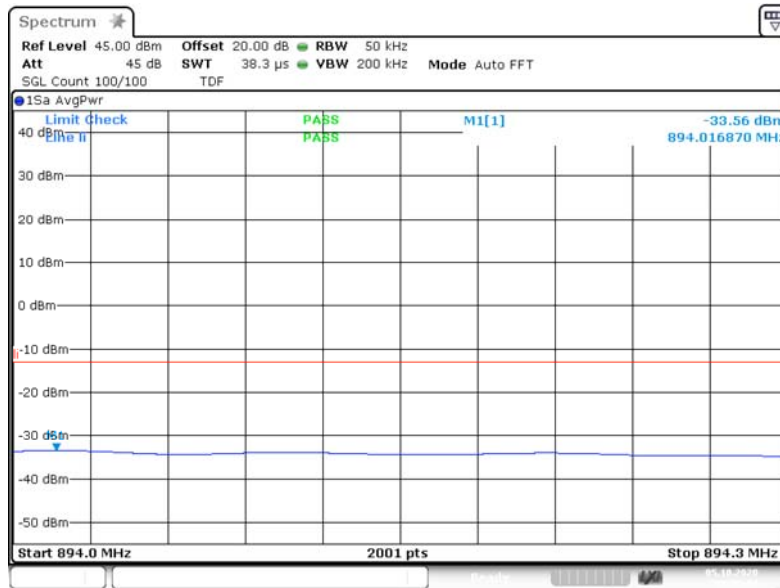

3.6.2 out of band emi CELL 850 AWGN upper 2carriers -0.3 dB
894.000M 894.300M

Band: CELL 850; Frequency: 869.0000 MHz to 894.0000 MHz; Band Edge: upper; Mod: AWGN;
Input Power = 3 dB > AGC; Number of signals 2

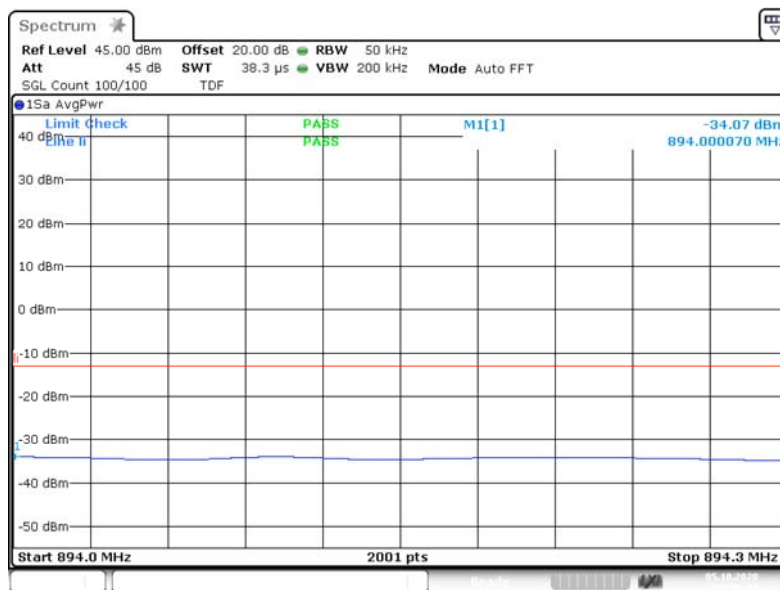

3.6.2 out of band emi CELL 850 AWGN upper 2carriers +3.0 dB
894.000M 894.300M




BUREAU
VERITAS


EffectiveECL-TA-20-004-V01.00

TA tests on Andrew CAP MX AC 6/7E/80-85/17E/19/23/25T

Band: CELL 850; Frequency: 869.0000 MHz to 894.0000 MHz; Band Edge: upper; Mod: GSM; Input Power = 0.3 dB < AGC; Number of signals 2

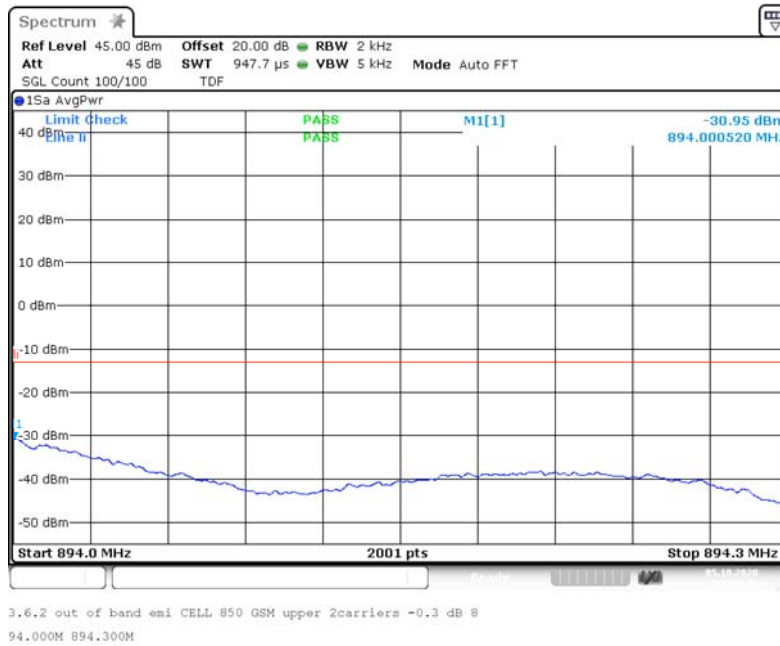

Band: CELL 850; Frequency: 869.0000 MHz to 894.0000 MHz; Band Edge: upper; Mod: GSM; Input Power = 3 dB > AGC; Number of signals 2

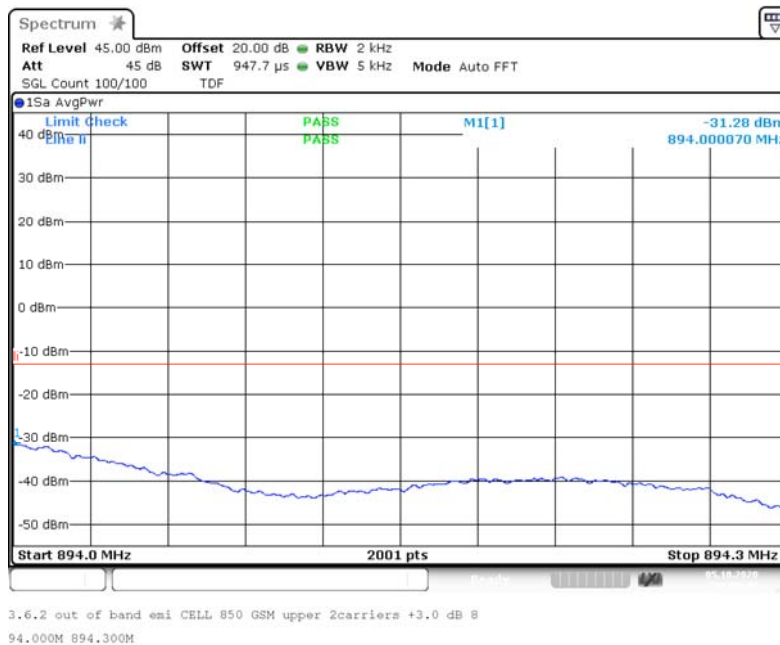




BUREAU
VERITAS


EffectiveECL-TA-20-004-V01.00

TA tests on Andrew CAP MX AC 6/7E/80-85/17E/19/23/25T

Band: CELL 850; Frequency: 869.0000 MHz to 894.0000 MHz; Band Edge: lower; Mod: AWGN;
Input Power = 0.3 dB < AGC; Number of signals 2

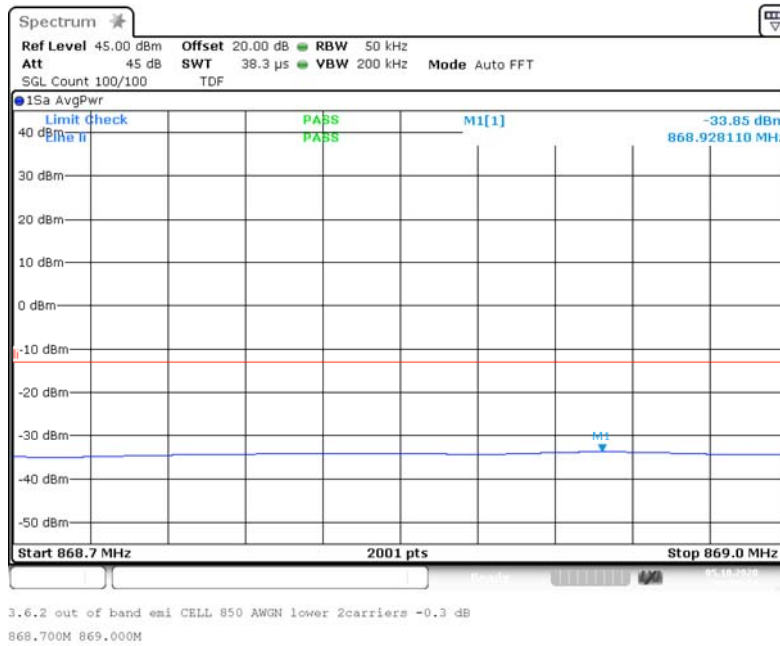

Band: CELL 850; Frequency: 869.0000 MHz to 894.0000 MHz; Band Edge: lower; Mod: AWGN;
Input Power = 3 dB > AGC; Number of signals 2

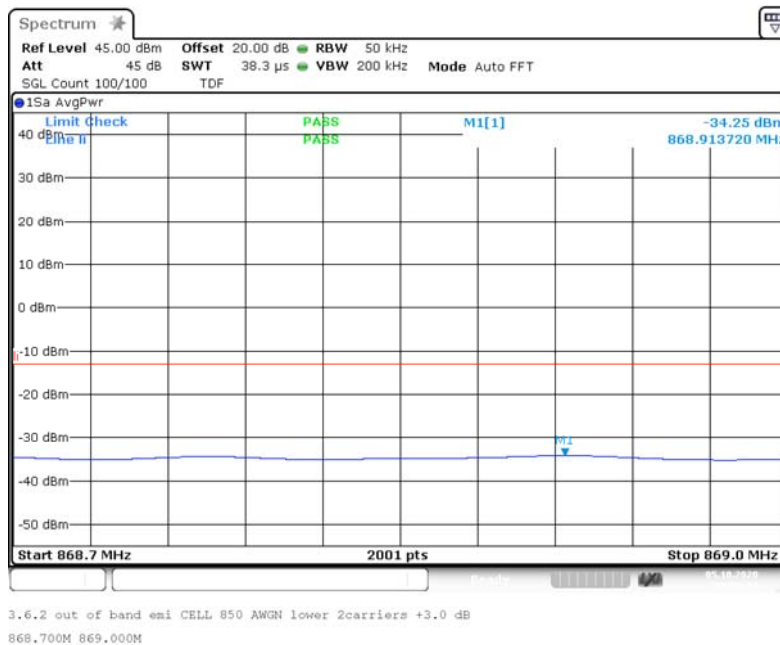




BUREAU
VERITAS


EffectiveECL-TA-20-004-V01.00

TA tests on Andrew CAP MX AC 6/7E/80-85/17E/19/23/25T

Band: CELL 850; Frequency: 869.0000 MHz to 894.0000 MHz; Band Edge: lower; Mod: GSM; Input Power = 0.3 dB < AGC; Number of signals 2

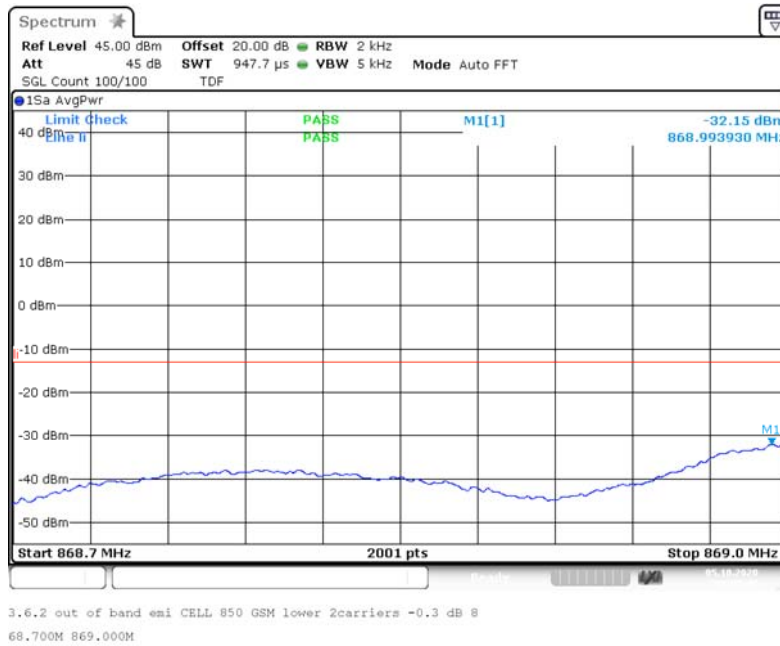

Band: CELL 850; Frequency: 869.0000 MHz to 894.0000 MHz; Band Edge: lower; Mod: GSM; Input Power = 3 dB > AGC; Number of signals 2

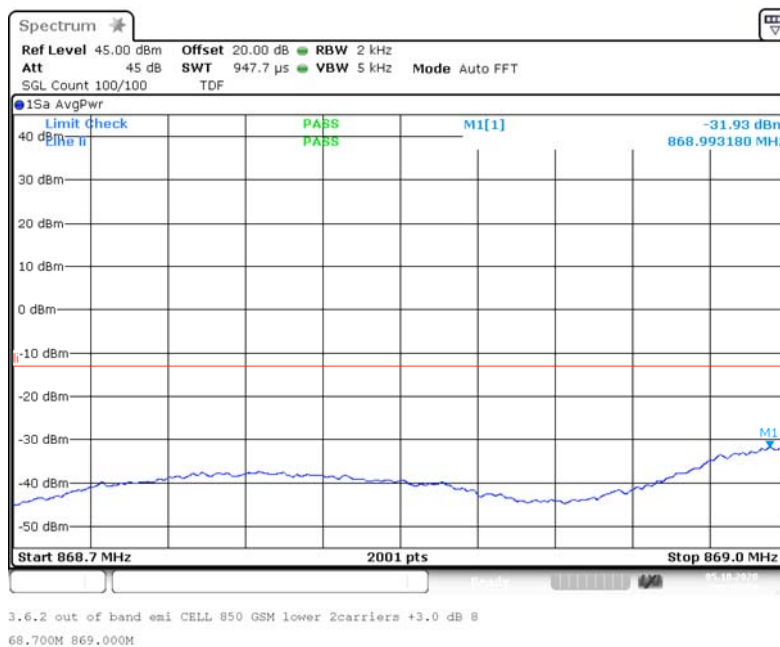



BUREAU
VERITAS

EfectiveECL-TA-20-004-V01.00

TA tests on Andrew CAP MX AC 6/7E/80-
85/17E/19/23/25T

4.5.5 TEST EQUIPMENT USED

- Conducted



Effective ECL-TA-20-004-V01.00

TA tests on Andrew CAP MX AC 6/7E/80-85/17E/19/23/25T

4.6 OUT-OF-BAND REJECTION

Standard FCC Part 27

The test was performed according to:
ANSI C63.26; KDB 935210 D05

Test date: 2020-10-05


Environmental conditions: 22 ° C; 45 % r. F.

Test engineer: Thomas Hufnagel

4.6.1 TEST DESCRIPTION

This test case is intended to demonstrate compliance to the out-of-band rejection test case for industrial signal boosters.

The EUT was connected to the test setup according to the following diagram:

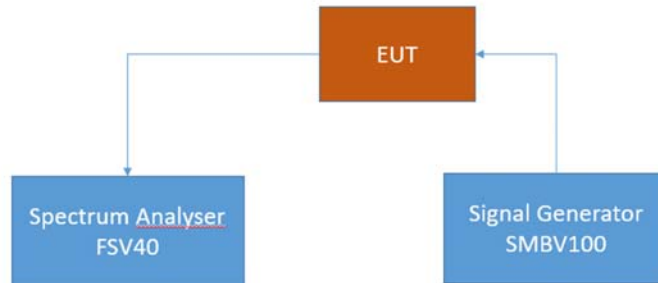

FCC Part 22/24/27/90 Industrial signal booster – Test Setup; Out-of-band rejection

The attenuation of the measuring and stimulus path are known for each measured frequency and are considered.

The Spectrum Analyzer settings can be directly found in the measurement diagrams.

4.6.2 TEST REQUIREMENTS/LIMITS

Abstract RSS-131 from ISED:

RSS-131; 5.2.1 Out-of-band rejection

The gain-versus-frequency response and the 20 dB bandwidth of the zone enhancer shall be reported. The zone enhancer shall reject amplification of other signals outside the passband of the zone enhancer.



EffectiveECL-TA-20-004-V01.00

TA tests on Andrew CAP MX AC 6/7E/80-85/17E/19/23/25T


4.6.3 TEST PROTOCOL

| Band 5 CELL 850, downlink | | | | |
|-------------------------------|--------------------|--|--|-----------------------|
| Highest Power Frequency [MHz] | Output Power [dBm] | Lower Highest Power -20 dB Frequency [MHz] | Upper Highest Power -20 dB Frequency [MHz] | 20 dB Bandwidth [MHz] |
| 891.58 | 24.21 | 867.869 | 895.131 | 27.262 |

Remark: Please see next sub-clause for the measurement plot.

4.6.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")

Frequency Band = Band 5 CELL 850, Direction = RF downlink

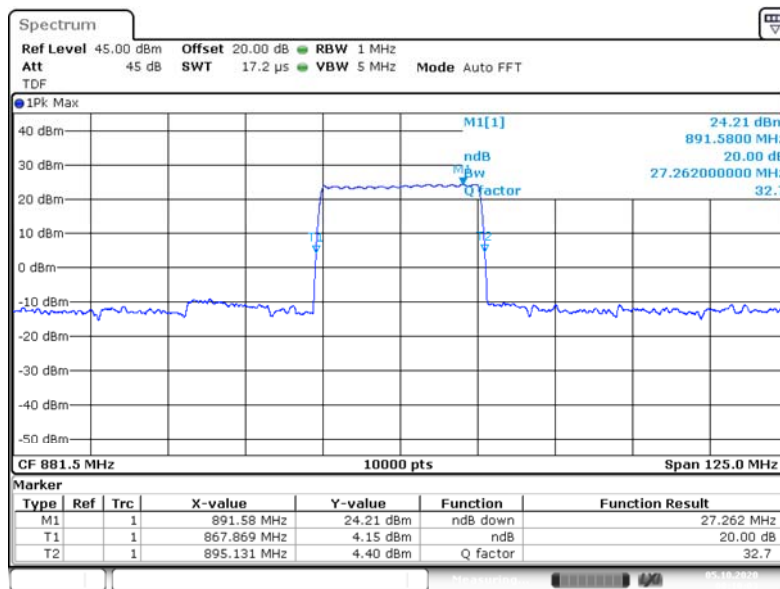

3.3 Out of band rejection CELL 850 881.50000M
_20dB

4.6.5 TEST EQUIPMENT USED

- Conducted

Effective ECL-TA-20-004-V01.00

TA tests on Andrew CAP MX AC 6/7E/80-85/17E/19/23/25T

4.7 FIELD STRENGTH OF SPURIOUS RADIATION

Standard FCC Part 27, § 24.53

The test was performed according to:
ANSI C63.26

Test date: 2020-09-09


Environmental conditions: 23 ° C; 46 % r. F.

Test engineer: Thomas Hufnagel

4.7.1 TEST DESCRIPTION


This test case is intended to demonstrate compliance to the applicable radiated spurious emission measurements per § 2.1053

The EUT was connected to the test setup according to the following diagram:

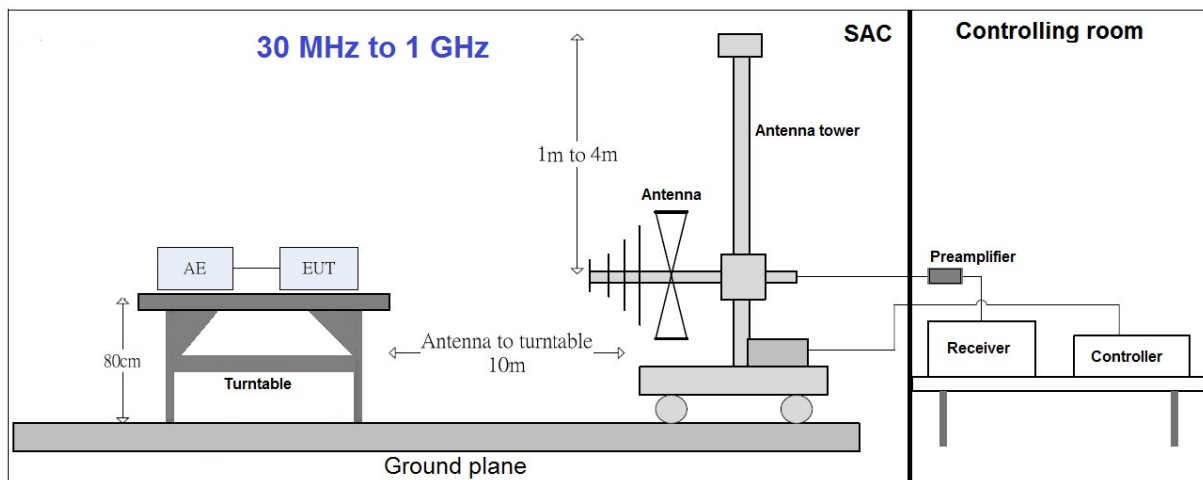

EffectiveECL-TA-20-004-V01.00

TA tests on Andrew CAP MX AC 6/7E/80-85/17E/19/23/25T

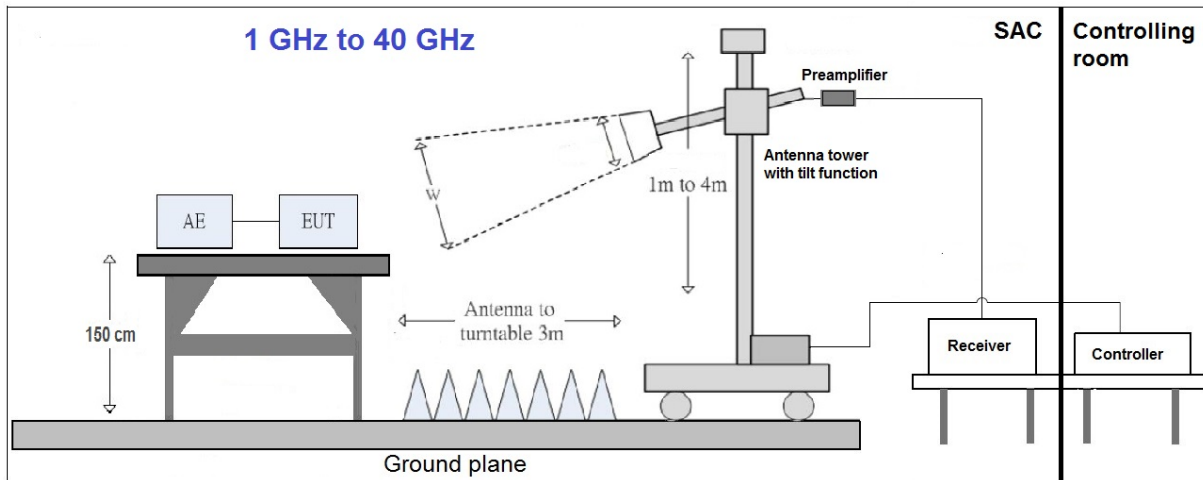

The test set-up was made in accordance to the general provisions of ANSI C63.4 in a typical installation configuration. The Equipment Under Test (EUT) was set up on a non-conductive table 1.5 x 1.5 m² in the semi-anechoic chamber, 0.8 meter above the ground or floor-standing arrangement shall be placed on the horizontal ground reference plane.. The influence of the EUT support table that is used between 30–1000 MHz was evaluated. For the initial measurements, the receiving antenna is varied from 1-4 meter height and is changed in the vertical plane from vertical to horizontal polarization at each frequency. The highest emissions between 30 MHz to 1000 MHz were analyzed in details by operating the spectrum analyzer and/or EMI receiver in quasi-peak mode to determine the precise amplitude of the emissions.

The measurement procedure is implemented into the EMI test software BAT EMC from NEXIO. Exploratory tests are performed at 3 orthogonal axes to determine the worst-case orientation of a body-worn or handheld EUT. The final test on all kind of EUTs is also performed at 3 axes. A pre-check is performed while the EUT is powered by a DC power source. ?

1. Measurement above 30 MHz and up to 1 GHz

Step 1: Preliminary scan

This is a preliminary test to identify the highest amplitudes relative to the limit.

Settings for step 1:

- Antenna distance: 10 m
- Detector: Peak-Maxhold/RMS (FFT-based)
- Frequency range: 30 – 1000 MHz
- Frequency steps: 30 kHz
- IF-Bandwidth: 120 kHz
- Measuring time/Frequency step: 5 ms
- Turntable angle range: -180° to 180°
- Turntable step size: 30°
- Height variation range: 1 – 4 m
- Height variation step size: 1 m
- Polarisation: Horizontal + Vertical

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.



Effective ECL-TA-20-004-V01.00

TA tests on Andrew CAP MX AC 6/7E/80-
85/17E/19/23/25T

Step 2: Adjustment measurement

In this step the accuracy of the turntable azimuth and antenna height will be improved. This is necessary to find out the maximum value of every frequency.

For each frequency, which was determined the turntable azimuth and antenna height will be adjusted. The turntable azimuth will slowly vary by $\pm 45^\circ$ around this value. During this action, the value of emission is continuously measured. The turntable azimuth at the highest emission will be recorded and adjusted. In this position, the antenna height will also slowly vary by ± 100 cm around the antenna height determined. During this action, the value of emission is also continuously measured. The antenna height of the highest emission will also be recorded and adjusted.

- Detector: Peak – Maxhold; RMS
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range: $\pm 30^\circ$ around the determined value
- Antenna Polarisation: max. value determined in step 1

Step 3: Final measurement with QP detector

With the settings determined in step 3, the final measurement will be performed:

EMI receiver settings for step 4:

- Detector: Quasi-Peak (< 1 GHz); RMS; Peak
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 1 s

After the measurement a plot will be generated which contains a diagram with the results of the preliminary scan and a chart with the frequencies and values of the results of the final measurement.

3. Measurement above 1 GHz

The following modifications apply to the measurement procedure for the frequency range above 1 GHz:

Step 1:

The Equipment Under Test (EUT) was set up on a non-conductive support at 1.5 m height in the semi-anechoic chamber. Absorbers are placed around and between the turn table and the antenna tower.

All steps were performed with one height (1.5 m) of the receiving antenna only.

The EUT is turned during the preliminary measurement across the elevation axis, with a step size of 30° .

The turn table step size (azimuth angle) for the preliminary measurement is 15° .

Step 2:

The maximum RFI field strength was determined during the measurement by rotating the turntable (± 180 degrees) and varying the height of the receive antenna ($h = 1 \dots 4$ m) with an additional tilt function of the antenna. The turn table azimuth will slowly vary by $\pm 15^\circ$.

EMI receiver settings (for all steps):

- Detector: Peak, Average
- IF Bandwidth = 1 MHz

Effective ECL-TA-20-004-V01.00

TA tests on Andrew CAP MX AC 6/7E/80-
85/17E/19/23/25T

Step 3:

Spectrum analyser settings for step 3:

- Detector: Peak/Average
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 1 MHz
- Measuring time: 1 s

4.7.2 TEST REQUIREMENTS/LIMITS

Abstract from FCC Part § 2.1053:

FCC Part 2.1053; Measurement required: Field strength of spurious radiation:

Measurements shall be made to detect spurious emissions that may be radiated directly from the cabinet, control circuits, power leads, or intermediate circuit elements under normal conditions of installation and operation. Curves or equivalent data shall be supplied showing the magnitude of each harmonic and other spurious emission. For this test, single sideband, independent sideband, and controlled carrier transmitters shall be modulated under the conditions specified in paragraph (c) of § 2.1049, as appropriate.

Abstract RSS-132 from ISED:

RSS-132; 5.5 Transmitter Unwanted Emissions

Mobile and base station equipment shall comply with the limits in (i) and (ii) below.

(i) In the first 1.0 MHz band immediately outside and adjacent to each of the sub-bands specified in Section 5.1, the power of emissions per any 1% of the occupied bandwidth shall be attenuated (in dB) below the transmitter output power P (dBW) by at least $43 + 10 \log_{10} p$ (watts).

(ii)

After the first 1.0 MHz immediately outside and adjacent to each of the sub-bands, the power of emissions in any 100 kHz bandwidth shall be attenuated (in dB) below the transmitter output power P (dBW) by at least $43 + 10 \log_{10} p$ (watts). If the measurement is performed using 1% of the occupied bandwidth, power integration over 100 kHz is required.



EfectiveECL-TA-20-004-V01.00

TA tests on Andrew CAP MX AC 6/7E/80-85/17E/19/23/25T

4.7.3 TEST PROTOCOL

30 MHz to 1 GHz:

| Band 5 CELL 850, downlink; | | | | | | |
|----------------------------|----------------------|-----------------------|----------|-----------|-------------|----------------------|
| Spurious Freq. [MHz] | Spurious Level [dBm] | Pin (Sum Level) [dBm] | Detector | RBW [kHz] | Limit [dBm] | Margin to Limit [dB] |
| 36.14 | -66.0 | -2.3 | PEAK | 120 | -13.0 | 53.0 |
| 74.67 | -56.5 | -2.3 | PEAK | 120 | -13.0 | 43.5 |
| 133.66 | -64.5 | -2.3 | PEAK | 120 | -13.0 | 51.5 |
| 273.45 | -53.7 | -2.3 | PEAK | 120 | -13.0 | 40.7 |
| 600.01 | -62.2 | -2.3 | PEAK | 120 | -13.0 | 49.2 |
| 869.21 | -56.6 | -2.3 | PEAK | 120 | -13.0 | 43.6 |

Above 1 GHz:

| Band 5 CELL 850, downlink; | | | | | | |
|----------------------------|----------------------|-----------------------|----------|-----------|-------------|----------------------|
| Spurious Freq. [MHz] | Spurious Level [dBm] | Pin (Sum Level) [dBm] | Detector | RBW [kHz] | Limit [dBm] | Margin to Limit [dB] |
| 2849.27 | -42.1 | -2.3 | PEAK | 1000 | -13.0 | 29.1 |
| 3538.12 | -41.3 | -2.3 | PEAK | 1000 | -13.0 | 28.3 |
| 8496.1 | -29.2 | -2.3 | PEAK | 1000 | -13.0 | 16.2 |
| 16744.0 | -21.0 | -2.3 | PEAK | 1000 | -13.0 | 8.0 |
| 17195.4 | -21.2 | -2.3 | PEAK | 1000 | -13.0 | 8.2 |
| 17799.8 | -19.6 | -2.3 | PEAK | 1000 | -13.0 | 6.6 |

Remarks: Please see next sub-clause for the measurement plot.

Although usually a RMS detector is used for measurements in this cases a PEAK detector was used.

The limits are values for use of a RMS detector, but it is so, that the use of a PEAK detector results in readings with higher measured levels. Because the levels with the higher values with PEAK detector are in tolerance, the limits with a RMS detector are definitely also in tolerance.



BUREAU
VERITAS



EffectiveECL-TA-20-004-V01.00

TA tests on Andrew CAP MX AC 6/7E/80-
85/17E/19/23/25T

4.7.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")

Frequency Band = Band 5 CELL 850, Test Frequency = low, Direction = RF downlink

30 MHz - 1 GHz

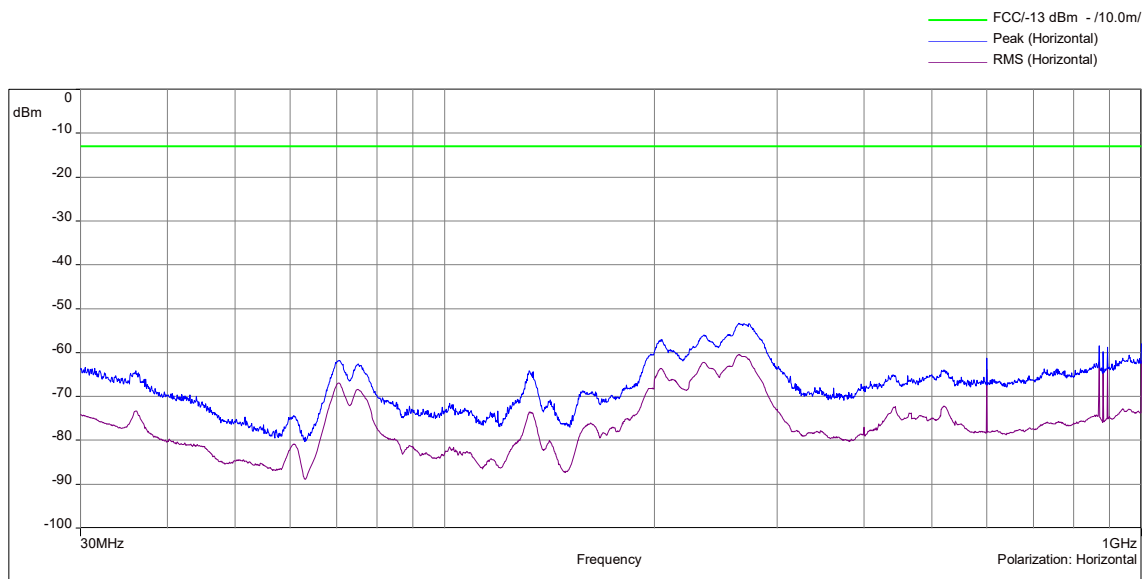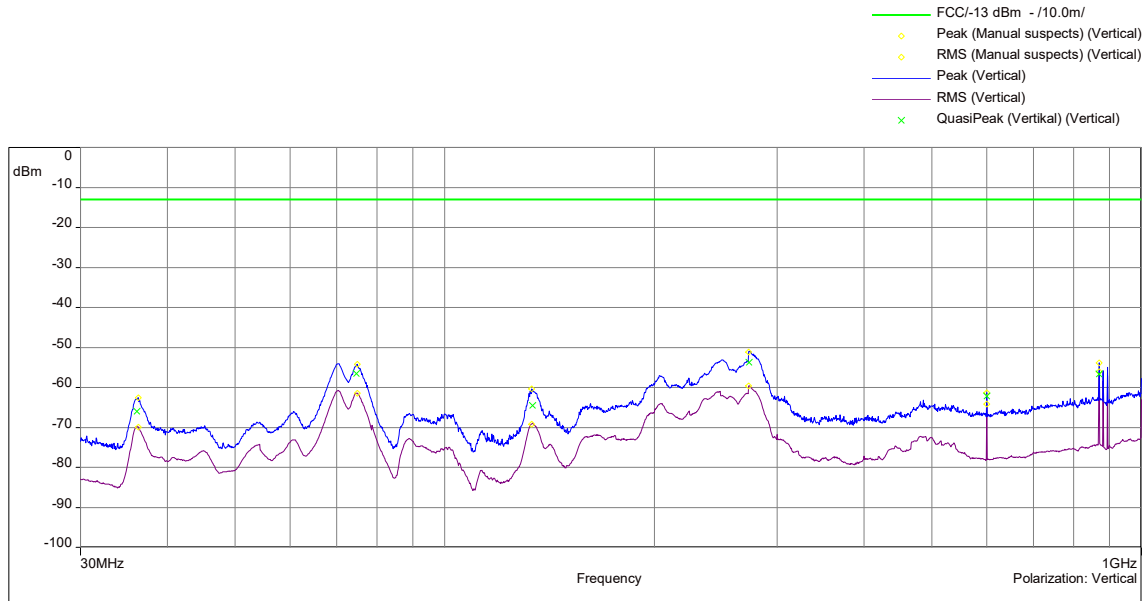




BUREAU
VERITAS

EffectiveECL-TA-20-004-V01.00


TA tests on Andrew CAP MX AC 6/7E/80-
85/17E/19/23/25T

1 GHz - 18 GHz

- FCC/-13 dBm - /3.0m/
- Peak (Manual suspects) (Vertical)
- Avg (Manual suspects) (Vertical)
- RMS (Manual suspects) (Vertical)
- Peak (Vertical)
- Avg (Vertical)
- RMS (Vertical)
- Peak (Vertical) (Vertical)
- RMS (Vertical) (Vertical)

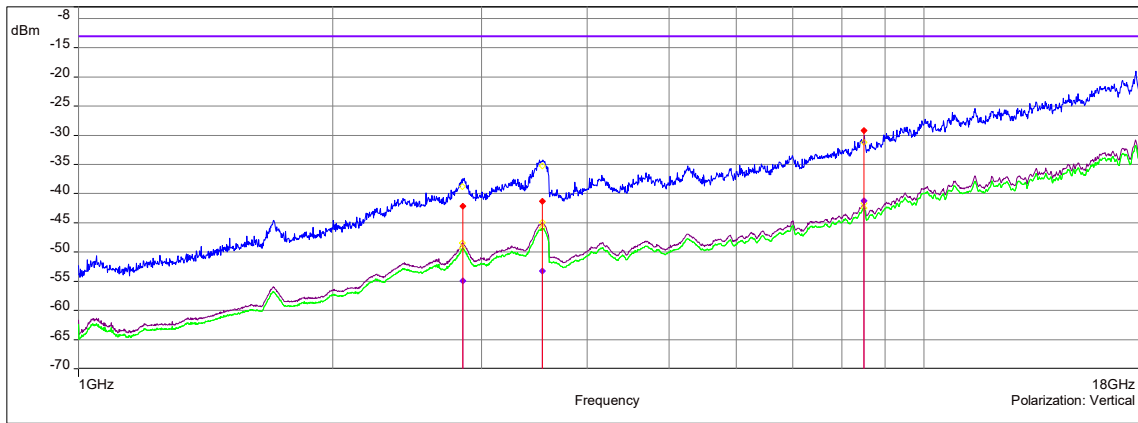

- FCC/-13 dBm - /3.0m/
- Peak (Manual suspects) (Horizontal)
- Avg (Manual suspects) (Horizontal)
- RMS (Manual suspects) (Horizontal)
- Peak (Horizontal)
- Avg (Horizontal)
- RMS (Horizontal)
- Peak (Vertical) (Horizontal)
- RMS (Vertical) (Horizontal)

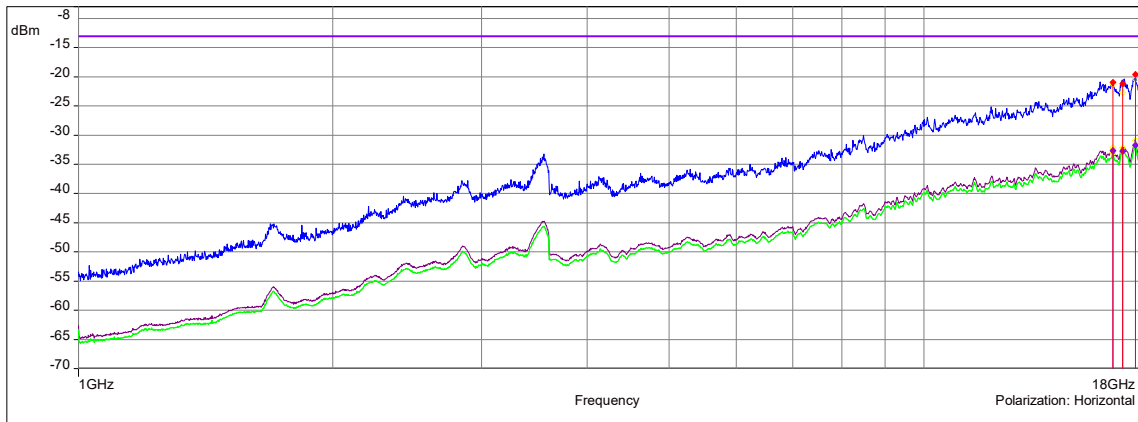



BUREAU
VERITAS

EfectiveECL-TA-20-004-V01.00

TA tests on Andrew CAP MX AC 6/7E/80-
85/17E/19/23/25T

4.7.5 FIELD STRENGTH CALCULATIONS

$$\mathbf{FS} = \mathbf{SA} + \mathbf{AF} + \mathbf{CL} + \mathbf{PA}$$

Where as:

- FS** = Field strength
- SA** = EMC test receiver reading
- AF** = Antenna factor
- CL** = Cable loss
- PA** = Preamplifier

4.7.6 TEST EQUIPMENT USED

- Radiated Emissions



EffectiveECL-TA-20-004-V01.00

TA tests on Andrew CAP MX AC 6/7E/80-
85/17E/19/23/25T

5 TEST EQUIPMENT

1 Conducted

| Ref.No. | Type | Description | Manufacturer | Inventory no. | Last Calibration | Calibration Due |
|---------|----------|--|-----------------|---------------|---------------------|-----------------|
| 1.1 | FSV40 | Signal Analyzer 10 Hz - 40 GHz | Rohde & Schwarz | E2050 | 2019-10 | 2020-10 |
| 1.2 | SMBV100A | Vector Signal Generator 9 kHz - 6 GHz | Rohde & Schwarz | G2089 | 2017-08/ 2020-08 | 2022-08 |
| 1.3 | SMIQ | Vector Signal Generator 9 kHz - 3.3 GHz | Rohde & Schwarz | G1509 | 2018-10 | 2021-10 |
| 1.4 | SMIQ | Vector Signal Generator 9 kHz - 3.3 GHz | Rohde & Schwarz | G1510 | 2018-10 | 2021-10 |
| 1.5 | ESH3-Z5 | Line Impedance Stabilisation Network (LISN) 150 Hz - 30 MHz | Rohde & Schwarz | K794 | 2019-02 | 2020-10 |
| 1.6 | 30.3015 | ThermoHygro Datalogger | TFA | X 507 | 2018-08 | 2021-08 |
| 1.7 | BAT-EMC | Software | Nexio | V3.17.0.26 | --- | --- |

2 Radiated Emissions

| Ref.No. | Type | Description | Manufacturer | Inventory no. | Last Calibration | Calibration Due |
|---------|----------------|-------------------------------------|-----------------|---------------|------------------|-----------------|
| 2.1 | ESU40 | EMI test receiver 10 Hz - 40 GHz | Rohde & Schwarz | E2025 | 2018-10 | 2020-10 |
| 2.2 | HFH2-Z2 | Antenna 9 kHz - 30 MHz | Rohde & Schwarz | K549 | 2018-10 | 2020-10 |
| 2.3 | CBL 6111C | Antenna 30 MHz - 1 GHz | Chase | K1026 | 2020-01 | 2021-01 |
| 2.4 | HL 025 | Antenna 1 GHz - 18 GHz | Rohde & Schwarz | K1114 | 2019-06 | 2021-06 |
| 2.5 | MWH-1826/B | Antenna 18 GHz - 26.5 GHz | ARA Inc. | K1042 | 2018-11 | 2020-11 |
| 2.6 | MWH-2640/B | Antenna 26 GHz - 40 GHz | ARA Inc. | K1043 | 2018-11 | 2020-11 |
| 2.7 | AM1431 | Pre amplifier 10 kHz - 1 GHz | Miteq | K1721 | 2019-10 | 2020-10 |
| 2.8 | AFS4-00102000 | Preamplifier 100 MHz - 20 GHz | Miteq | K817 | 2019-08 | 2021-08. |
| 2.9 | AFS4-00102000 | Preamplifier 100 MHz - 20 GHz | Miteq | K838 | 2019-10 | 2020-10 |
| 2.10 | JS43-1800-4000 | Preamplifier 18 GHz - 40 GHz | Miteq | K1104 | 2019-05 | 2020-10 |
| 2.11 | BAT-EMC | Software | Nexio | V3.17.0.26 | --- | --- |



Effective ECL-TA-20-004-V01.00

TA tests on Andrew CAP MX AC 6/7E/80-85/17E/19/23/25T

6 ANTENNA FACTORS, CABLE LOSS AND SAMPLE CALCULATIONS

This chapter contains the antenna factors with their corresponding path loss of the used measurement path for all antennas.

6.1 ANTENNA CHASE CBL 6111C (30 MHZ – 1 GHZ)

(d = 10 m)

| Frequency | AF Horizontal R&S CBL 6111C | AF Vertikal R&S CBL 6111C | Corr. |
|-----------|-----------------------------------|---------------------------------|-------|
| 30 | 47.9 | 38.1 | -38.1 |
| 50 | 34.4 | 26.4 | -38.0 |
| 100 | 31.6 | 32.8 | -38.0 |
| 150 | 33.7 | 33.9 | -37.9 |
| 200 | 30.3 | 32.8 | -37.7 |
| 250 | 33.6 | 36.5 | -37.5 |
| 300 | 34.5 | 36.8 | -37.1 |
| 350 | 36.3 | 37.2 | -37.0 |
| 400 | 36.9 | 38.3 | -36.8 |
| 450 | 38.0 | 39.6 | -36.5 |
| 500 | 39.2 | 40.4 | -36.0 |
| 550 | 41.2 | 42.1 | -35.9 |
| 600 | 41.6 | 41.7 | -35.7 |
| 650 | 41.9 | 42.9 | -35.9 |
| 700 | 42.3 | 43.4 | -35.6 |
| 750 | 43.5 | 43.9 | -35.7 |
| 800 | 43.6 | 44.6 | -36.0 |
| 850 | 45.0 | 45.1 | -36.1 |
| 900 | 45.2 | 45.1 | -36.6 |
| 950 | 46.4 | 46.4 | -36.4 |
| 1000 | 45.8 | 47.0 | -36.0 |

| cable loss (antenna - pre-amp) | pre-amp | cable loss (inside chamber) | cable loss (to receiver) |
|--------------------------------------|---------|-----------------------------------|-----------------------------|
| -0,01 | -38.3 | 0.0 | 0.1 |
| 0,28 | -38.4 | 0.3 | 0.1 |
| 0,52 | -38.7 | 0.5 | 0.2 |
| 0,73 | -38.8 | 0.7 | 0.2 |
| 0,95 | -38.9 | 1.0 | 0.3 |
| 1,10 | -38.9 | 1.1 | 0.3 |
| 1,20 | -38.6 | 1.2 | 0.3 |
| 1,29 | -38.6 | 1.3 | 0.3 |
| 1,36 | -38.5 | 1.4 | 0.3 |
| 1,42 | -38.2 | 1.4 | 0.4 |
| 1,48 | -37.9 | 1.5 | 0.4 |
| 1,54 | -37.8 | 1.5 | 0.4 |
| 1,60 | -37.7 | 1.6 | 0.4 |
| 1,64 | -38.0 | 1.6 | 0.5 |
| 1,71 | -37.8 | 1.7 | 0.5 |
| 1,76 | -38.0 | 1.8 | 0.5 |
| 1,80 | -38.3 | 1.8 | 0.5 |
| 1,84 | -38.4 | 1.8 | 0.5 |
| 1,91 | -39.0 | 1.9 | 0.5 |
| 1,93 | -38.9 | 1.9 | 0.6 |
| 1,99 | -38.6 | 2.0 | 0.6 |

Sample calculation

$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + AF \text{ (dB 1/m)} + Corr. \text{ (dB)}$
 U = Receiver reading
 AF = Antenna factor
 Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)
 distance correction = $-20 * LOG (d_{Limit} / d_{used})$
 Linear interpolation will be used for frequencies in between the values in the table.
 Tables show an extract of values.



EfectiveECL-TA-20-004-V01.00

TA tests on Andrew CAP MX AC 6/7E/80-85/17E/19/23/25T

6.2 ANTENNA ROHDE & SCHWARZ HL 025 (1 GHZ – 18 GHZ)

| Frequency | AF R&S HL 025 | Corr. |
|-----------|------------------|-------|
| MHz | dB (1/m) | dB |
| 1000 | 33.2 | -18.9 |
| 2000 | 39.4 | -17.8 |
| 3000 | 42.8 | -17.0 |
| 4000 | 45.1 | -16.6 |
| 5000 | 46.8 | -16.6 |
| 6000 | 48.5 | -16.7 |
| 7000 | 50.2 | -16.2 |
| 8000 | 50.4 | -15.3 |
| 9000 | 51.9 | -14.4 |
| 10000 | 53.8 | -14.0 |
| 11000 | 54.5 | -14.1 |
| 12000 | 55.3 | -14.4 |
| 13000 | 55.7 | -14.7 |
| 14000 | 56.5 | -14.8 |
| 15000 | 56.4 | -14.7 |
| 16000 | 57.2 | -14.3 |
| 17000 | 57.6 | -14.5 |
| 18000 | 57.6 | -14.6 |

| pre-amp | cable loss (to receiver) |
|---------|-----------------------------|
| dB | dB |
| -20.92 | 2.01 |
| -20.60 | 2.78 |
| -20.44 | 3.42 |
| -20.58 | 3.99 |
| -21.08 | 4.46 |
| -21.53 | 4.87 |
| -21.53 | 5.35 |
| -20.97 | 5.66 |
| -20.44 | 6.05 |
| -20.43 | 6.45 |
| -20.84 | 6.69 |
| -21.41 | 7.04 |
| -22.09 | 7.36 |
| -22.48 | 7.66 |
| -22.56 | 7.90 |
| -22.49 | 8.20 |
| -22.90 | 8.45 |
| -23.27 | 8.71 |

Sample calculation

$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + AF \text{ (dB 1/m)} + Corr. \text{ (dB)}$
 U = Receiver reading
 AF = Antenna factor
 Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)
 Linear interpolation will be used for frequencies in between the values in the table.
 Tables show an extract of values.



EffectiveECL-TA-20-004-V01.00

TA tests on Andrew CAP MX AC 6/7E/80-85/17E/19/23/25T

6.3 ANTENNA ARA INC. MWH-1826-B (18 GHZ – 26.5 GHZ) PARTIALLY IN CONJUNCTION WITH PRE-AMPLIFIER MITEQ JS43-1800-4000: THE USE OF THE PRE-AMPLIFIER IS DEPENDENT FROM THE FIELD STRENGTH

| Frequency | AF | Corr. |
|-----------|--------------------------|-------|
| MHz | EMCO 3160-09 dB (1/m) | dB |
| 18000 | 44.3 | -37.5 |
| 18500 | 43.9 | -37.6 |
| 19000 | 44.4 | -36.9 |
| 19500 | 44.1 | -36.1 |
| 20000 | 44.6 | -36.3 |
| 20500 | 44.9 | -36.1 |
| 21000 | 45.2 | -35.9 |
| 21500 | 45.0 | -35.7 |
| 22000 | 45.1 | -35.3 |
| 22500 | 45.4 | -35.0 |
| 23000 | 45.7 | -35.6 |
| 23500 | 45.8 | -34.3 |
| 24000 | 45.3 | -34.8 |
| 24500 | 45.3 | -35.0 |
| 25000 | 46.1 | -34.3 |
| 25500 | 46.5 | -34.2 |
| 26000 | 46.7 | -34.8 |
| 26500 | 46.5 | -34.4 |
| 27000 | 46.4 | -35.1 |

| pre-amp | cable loss (to receiver) |
|---------|-----------------------------|
| dB | dB |
| -46.2 | 8.7 |
| -46.4 | 8.8 |
| -45.9 | 9.0 |
| -45.2 | 9.1 |
| -45.6 | 9.3 |
| -45.5 | 9.4 |
| -45.3 | 9.4 |
| -45.3 | 9.7 |
| -45.1 | 9.8 |
| -44.8 | 9.8 |
| -45.5 | 9.9 |
| -44.4 | 10.1 |
| -45.0 | 10.2 |
| -45.3 | 10.4 |
| -44.8 | 10.5 |
| -44.7 | 10.5 |
| -45.4 | 10.6 |
| -45.1 | 10.7 |
| -46.0 | 10.9 |

Sample calculation

$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + AF \text{ (dB 1/m)} + Corr. \text{ (dB)}$
 U = Receiver reading
 AF = Antenna factor
 Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)
 Linear interpolation will be used for frequencies in between the values in the table.
 Table shows an extract of values.



**BUREAU
VERITAS**

Effective ECL-TA-20-004-V01.00

TA tests on Andrew CAP MX AC 6/7E/80-
85/17E/19/23/25T

7 MEASUREMENT UNCERTAINTIES

| KDB 935210 D05 | ECL |
|---|--------------------|
| Power measurement | 0,68 dB |
| Measuring AGC threshold level | 0,90 dB |
| Out of band rejection | 0,90 dB |
| Input-versus-output signal comparison | 0,91 dB |
| Mean power output | 0,90 dB |
| Measuring out-of-band/out-of-block (including intermodulation) emissions and spurious emissions | 0,90 dB |
| Out-of-band/out-of-block emissions conducted measurements | 0,90 dB |
| Spurious emissions conducted | 2,18 dB |
| Spurious emissions radiated measurements | 5,38 dB |
| Total frequency uncertainty | 2×10^{-7} |


Reference :

ECL-MU5.4.6.3-EMC-14-001-V03.00 MU Wireless.xlsx

EffectiveECL-TA-20-004-V01.00

TA tests on Andrew CAP MX AC 6/7E/80-85/17E/19/23/25T

8 PHOTO REPORT

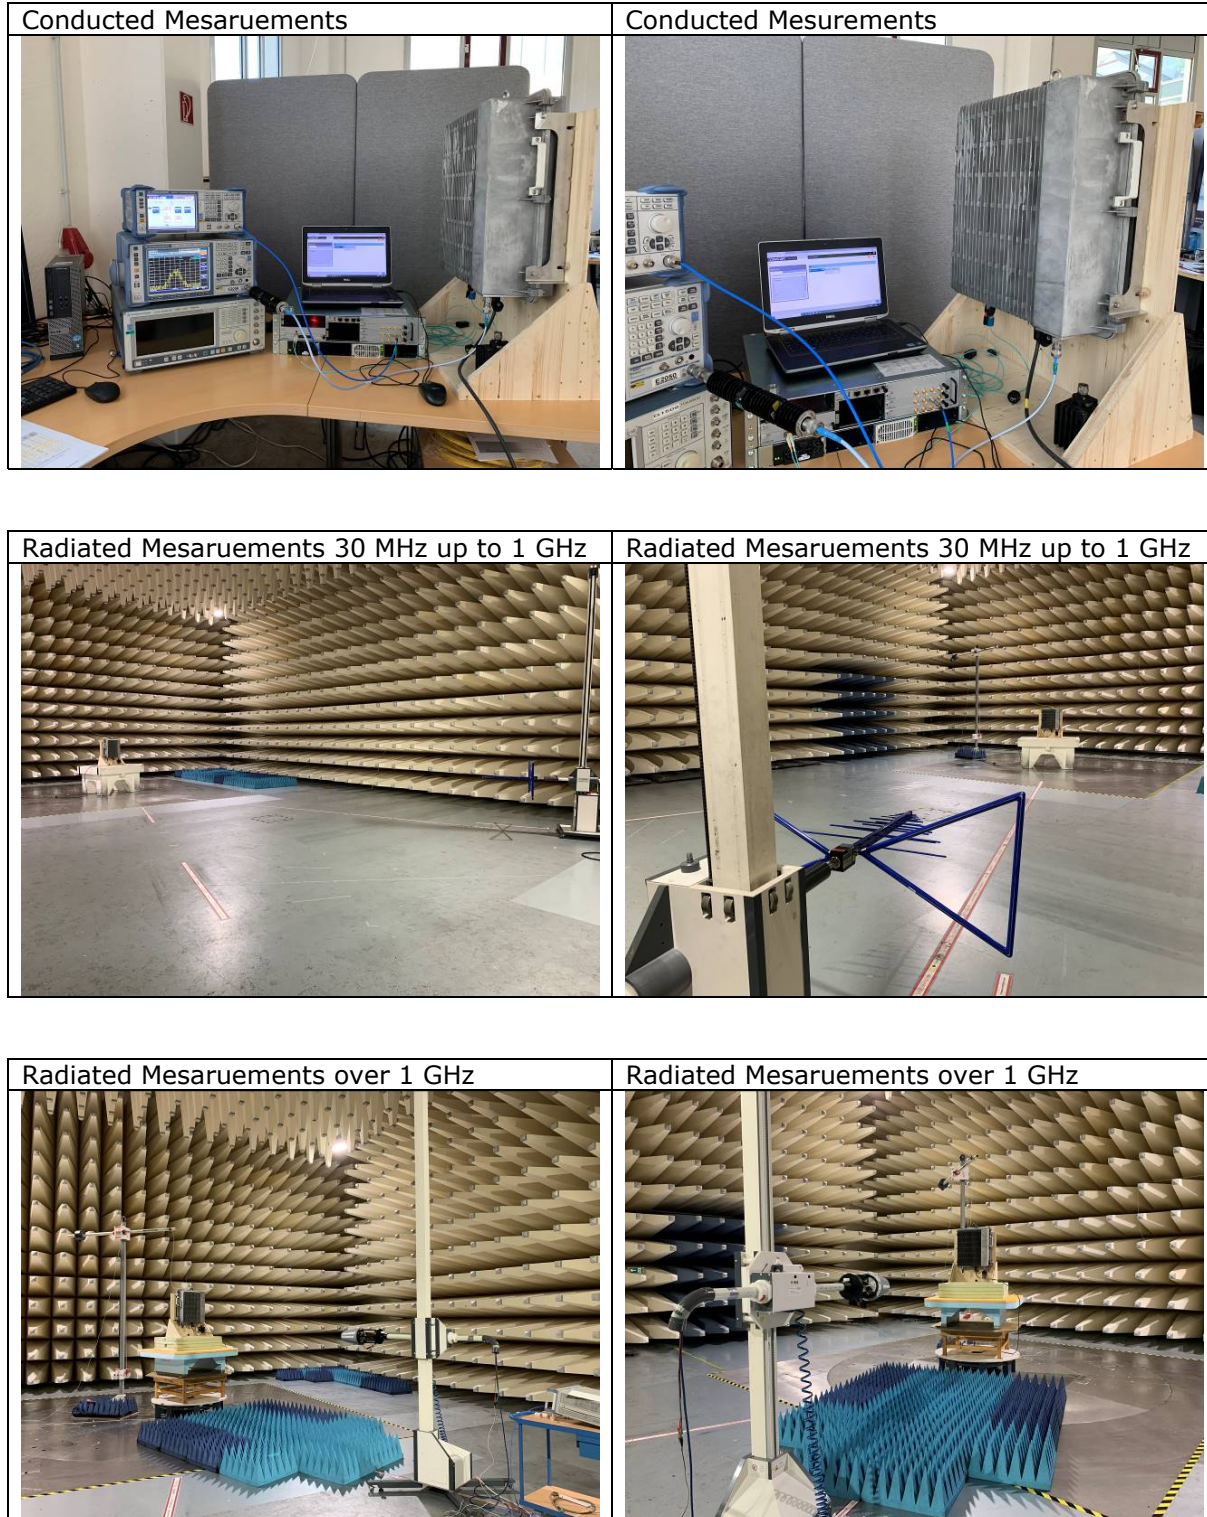



**BUREAU
VERITAS**

EfectiveECL-TA-20-004-V01.00

TA tests on Andrew CAP MX AC 6/7E/80-
85/17E/19/23/25T

Annex A: Accreditation certificate (for information)

The accreditation relates to competences stated on the accreditation certificate. The current certificate is available on the homepage of the DAkkS and can be downloaded under accredited bodies with the processing number:

<https://www.dakks.de/en>



BUREAU
VERITAS

EfectiveECL-TA-20-004-V01.00

TA tests on Andrew CAP MX AC 6/7E/80-
85/17E/19/23/25T

Annex B: Additional information provided by client

None.

***** End of test report *****