

FCC Measurement/Technical Report on

PSR 7/8 B

Cellular Repeater

FCC ID: XS5-PSR78B
IC: 2237E-PSR78B

Test Report Reference: MDE_BVNBG_1903_FCC01_rev2

Test Laboratory:

7layers GmbH
Borsigstrasse 11
40880 Ratingen
Germany



Deutsche
Akkreditierungsstelle
D-PL-12140-01-00

Note:

The following test results relate only to the devices specified in this document. This report shall not be reproduced in parts without the written approval of the test laboratory.

7layers GmbH

Borsigstraße 11
40880 Ratingen, Germany
T +49 (0) 2102 749 0
F +49 (0) 2102 749 350

Geschäftsführer/

Managing Directors:

Frank Spiller
Bernhard Retka
Alexandre Norré-Oudard

Registergericht/registered:

Düsseldorf HRB 75554
USt-Id.-Nr./VAT-No. DE203159652
Steuer-Nr./TAX-No. 147/5869/0385

*a Bureau Veritas
Group Company*

www.7layers.com

Table of Contents

1.1	Applied Standards	3
1.2	FCC-ISED Correlation Table	4
1.3	Measurement Summary / Signatures	5
2	Administrative Data	21
2.1	Testing Laboratory	21
2.2	Project Data	21
2.3	Applicant Data	21
2.4	Manufacturer Data	21
3	Test object Data	22
3.1	General EUT Description	22
3.2	EUT Main components	23
3.3	Ancillary Equipment	23
3.4	Auxiliary Equipment	23
3.5	EUT Setups	23
3.6	Operating Modes	24
3.7	Product labelling	26
4	Test Results	27
4.1	Effective Radiated Power, mean output power and zone enhancer gain	27
4.2	Peak to Average Ratio	42
4.3	Occupied Bandwidth / Input-versus-output Spectrum	85
4.3	Conducted spurious emissions at antenna terminals	169
4.4	Out-of-band emission limits	193
4.5	Out-of-band rejection	211
4.6	Noise figure	220
4.7	Field strength of spurious radiation	224
5	Test Equipment	239
6	Antenna Factors, Cable Loss and Sample Calculations	242
6.1	LISN R&S ESH3-Z5 (150 kHz – 30 MHz)	242
6.2	Antenna R&S HFH2-Z2 (9 kHz – 30 MHz)	243
6.3	Antenna R&S HL562 (30 MHz – 1 GHz)	244
6.4	Antenna R&S HF907 (1 GHz – 18 GHz)	245
6.5	Antenna EMCO 3160-09 (18 GHz – 26.5 GHz)	246
6.6	Antenna EMCO 3160-10 (26.5 GHz – 40 GHz)	247
7	Measurement Uncertainties	248
8	Photo Report	249

Applied Standards and Test Summary

1.1 APPLIED STANDARDS

Prepared in accordance with the requirements of FCC Rules and Regulations as listed in 47 CFR Ch.1 Parts 2 and 90, (10/1/18 Edition). The following subparts are applicable to the results in this test report.

Part 2, Subpart J - Equipment Authorization Procedures, Certification

Part 90; Private Land Mobile Radio Services

Subpart R - Regulations Governing the Licensing and Use of Frequencies in the 763-775 and 793-805 MHz Bands

90.542 - Broadband transmitting power limits
90.543 - Emission limitations

Subpart S - Regulations Governing Licensing and Use of Frequencies in the 806-824, 851-869, 896-901, And 935-940 MHz Bands

§ 90.635 - Limitations on power and antenna height
§ 90.691 - Emission mask requirements for EA-based systems

Subpart I - General Technical Standards

§ 90.213 - Frequency Stability
§ 90.219 - Use of signal boosters

The tests were selected and performed with reference to:

- FCC Public Notice 935210 applying "Signal Boosters Basic Certification Requirements" 935210 D02 v04r02, 2019-04-15.
- FCC Public Notice 935210 applying "Measurement guidance for industrial and non-consumer signal booster, repeater and amplifier devices" 935210 D05 v01r03, 2019-04-15.
- FCC Public Notice 971168 applying "Measurement guidance for certification of licensed digital transmitters" 971168 D01 v03r01, 2018-04-09
- ANSI C63.26: 2015

Summary Test Results:

The EUT complied with all performed tests as listed in chapter 1.3 Measurement Summary / Signatures.

1.2 FCC-ISED CORRELATION TABLE

Correlation of measurement requirements for Industrial Signal Booster from FCC and ISED Canada

Band 14 (758 MHz – 768 MHz)

Measurement	FCC reference	ISED reference
Effective radiated power, mean output power and zone enhancer gain	§2.1046 §90.542 KDB 935210 D05 v01r03: 3.5	RSS-GEN Issue 5, 6.12 RSS-140 Issue 1, 4.3 SRSP-540, Issue 7, 5.1.1 RSS-131, Issue 3, 6.2
Peak to Average Ratio	-	RSS 140 Issue 1: 4.3
Occupied bandwidth Input-versus-output spectrum	§2.1049 KDB 935210 D05 v01r03: 3.4	RSS-GEN Issue 5, 6.7 RSS-131, Issue 3, 6.6
Conducted spurious Emission at Antenna Terminal	§2.1051 §90.543	RSS-GEN Issue 5, 6.13 RSS-140 Issue 1, 4.4 RSS-131, Issue 3, 6.5
Out-of-band emissions limits/Intermodulation	§2.1051 §90.213 KDB 935210 D05 v01r03: 3.6	RSS-GEN Issue 5, 6.13 RSS-140 Issue 1, 4.4 RSS-131, Issue 3, 6.3
Frequency stability	§2.1055	RSS-GEN Issue 5, 6.11 RSS-140 Issue 1, 4.2 RSS-131, Issue 3, 6.6
Field strength of spurious radiation	§2.1053 §90.543	RSS-GEN Issue 5, 6.13 RSS-140 Issue 1, 4.4 RSS-131, Issue 3, 6.5
Out-of-band rejection	KDB 935210 D05 v01r03: 3.3	RSS-131, Issue 3, 6.2.1
Noise figure	§90.219	RSS-131, Issue 3, 6.4

1.3 MEASUREMENT SUMMARY / SIGNATURES

Band 758 MHz – 768 MHz (Downlink) / 788 MHz – 798 MHz (Uplink)

47 CFR CHAPTER I FCC PART 90 Subpart R/I [Base Stations/Repeater]

**§2.1046, §90.542 (a),
KDB 935210 D02 II (p)(4)**

Effective Radiated Power, mean output power and zone enhancer gain
The measurement was performed according to ANSI C63.26, KDB
935210 D05 v01r03: 3.5

Final Result

OP-Mode

Frequency Band, Direction, Input Power, Signal Type

Band 758 MHz – 768 MHz, RF downlink, 0.3 dB < AGC, CW

Band 788 MHz – 798 MHz, RF uplink, 0.3 dB < AGC, CW

Band 758 MHz – 768 MHz, RF downlink, 3 dB > AGC, CW

Band 788 MHz – 798 MHz, RF uplink, 3 dB > AGC, CW

Setup

S01_AA01

S01_AA01

S01_AA01

S01_AA01

FCC

Passed

Passed

Passed

Passed

IC

Passed

Passed

Passed

Passed

47 CFR CHAPTER I FCC PART 90 Subpart R/I [Base Stations/Repeater]

Peak to Average Ratio

The measurement was performed according to ANSI C63.26

Final Result

OP-Mode

Frequency Band, Direction, Input Power, Signal Type

Band 758 MHz – 768 MHz, RF downlink, 0.3 dB < AGC, 5M00G7D

Band 788 MHz – 798 MHz, RF uplink, 0.3 dB < AGC, 5M00G7D

Band 758 MHz – 768 MHz, RF downlink, 3 dB > AGC, 5M00G7D

Band 788 MHz – 798 MHz, RF uplink, 3 dB > AGC, 5M00G7D

Setup

S01_AA01

S01_AA01

S01_AA01

S01_AA01

FCC

Passed

Passed

Passed

Passed

IC

Passed

Passed

Passed

Passed

47 CFR CHAPTER I FCC PART 90 Subpart R/I [Base Stations/Repeater]

**§2.1049,
KDB 935210 D02 II (p)(3)**

Occupied Bandwidth / Input-versus-output Spectrum

The measurement was performed according to ANSI C63.26, KDB
935210 D05 v01r03: 3.4

Final Result

OP-Mode

Frequency Band, Direction, Input Power, Signal Type

Band 758 MHz – 768 MHz, RF downlink, 0.3 dB < AGC, 5M00G7D

Band 788 MHz – 798 MHz, RF uplink, 0.3 dB < AGC, 5M00G7D

Band 758 MHz – 768 MHz, RF downlink, 3 dB > AGC, 5M00G7D

Band 788 MHz – 798 MHz, RF uplink, 3 dB > AGC, 5M00G7D

Setup

S01_AA01

S01_AA01

S01_AA01

S01_AA01

FCC

Performed

Performed

Performed

Performed

IC

Passed

Passed

Passed

Passed

**47 CFR CHAPTER I FCC PART 90 Subpart R/I
[Base Stations/Repeater]**

§2.1051, §90.543

Conducted spurious emissions at antenna terminals
The measurement was performed according to ANSI C63.26

Final Result

OP-Mode

Frequency Band, Test Frequency, Direction, Signal Type

Band 758 MHz – 768 MHz, high, RF downlink, CW

Band 788 MHz – 798 MHz, high, RF uplink, CW

Band 758 MHz – 768 MHz, low, RF downlink, CW

Band 788 MHz – 798 MHz, low, RF uplink, CW

Band 758 MHz – 768 MHz, mid, RF downlink, CW

Band 788 MHz – 798 MHz, mid, RF uplink, CW

Setup

S01_AA01

S01_AA01

S01_AA01

S01_AA01

S01_AA01

S01_AA01

FCC

Passed¹⁾

Passed¹⁾

Passed¹⁾

Passed¹⁾

Passed¹⁾

Passed¹⁾

IC

Passed¹⁾

Passed¹⁾

Passed¹⁾

Passed¹⁾

Passed¹⁾

Passed¹⁾

**47 CFR CHAPTER I FCC PART 90 Subpart R/I
[Base Stations/Repeater]**

§2.1053, §90.543

KDB 935210 D02 II (p)(3)

Out-of-band emission limits / Intermodulation

The measurement was performed according to ANSI C63.26, KDB
935210 D05 v01r03: 3.6

Final Result

OP-Mode

Frequency Band, Number of signals, Direction, Input Power,
Signal Type

Band 758 MHz – 768 MHz, 2, RF downlink, 0.3 dB < AGC, CW

Band 788 MHz – 798 MHz, 2, RF uplink, 0.3 dB < AGC, CW

Band 758 MHz – 768 MHz, 2, RF downlink, 3 dB > AGC, CW

Band 788 MHz – 798 MHz, 2, RF uplink, 3 dB > AGC, CW

Setup

S01_AA01

S01_AA01

S01_AA01

S01_AA01

FCC

Passed

Passed

Passed

Passed

IC

Passed

Passed

Passed

Passed

**47 CFR CHAPTER I FCC PART 90 Subpart S/I
[Base Stations/Repeater]**

KDB 935210 D02 II (p)(2)

Out-of-band rejection

The measurement was performed according to ANSI C63.26

Final Result

OP-Mode

Frequency Band, Direction

Band 758 MHz – 768 MHz, RF downlink

Band 788 MHz – 798 MHz, RF uplink

Setup

S01_AA01

S01_AA01

FCC

Passed

Passed

IC

Passed

Passed

**47 CFR CHAPTER I FCC PART 90 Subpart R/I
[Base Stations/Repeater]**

§90.219(d)(6)(ii)/(iii), (e)(3)

Noise figure

The measurement was performed according to ANSI C63.26

Final Result

OP-Mode

Frequency Band, Direction, Test Step

Band 758 MHz – 768 MHz, RF downlink, passband

Band 788 MHz – 798 MHz, RF uplink, passband

Setup

S01_AA01

S01_AA01

FCC

Passed

Passed

IC

Passed

Passed

47 CFR CHAPTER I FCC PART 90 Subpart R/I
[Base Stations/Repeater]

\$2.1053, \$90.543

Field strength of spurious radiation

The measurement was performed according to ANSI C63.26

Final Result

OP-Mode

Frequency Band, Test Frequency, Direction

Band 758 MHz – 768 MHz, high, RF downlink

Band 788 MHz – 798 MHz, high, RF uplink

Band 758 MHz – 768 MHz, low, RF downlink

Band 788 MHz – 798 MHz, low, RF uplink

Band 758 MHz – 768 MHz, mid, RF downlink

Band 788 MHz – 798 MHz, mid, RF uplink

Setup

FCC

IC

S01_AA01

Passed

Passed

S01_AA01

Passed

Passed

S01_AA01

Passed

Passed

S01_AA01

Passed

Passed

S01_AA01

Passed

Passed

S01_AA01

Passed

Passed

Band 769 MHz – 775 MHz (Downlink) / 799 MHz – 805 MHz (Uplink)

47 CFR CHAPTER I FCC PART 90 Subpart R/I [Base Stations/Repeater]

**§2.1046, §90.541 (a), §90.635
(a), §90.531 (b)(3)(4)
KDB 935210 D02 II (p)(4)**

Effective Radiated Power, mean output power and zone enhancer gain
The measurement was performed according to ANSI C63.26, KDB
935210 D05 v01r03: 3.5

Final Result

OP-Mode

Frequency Band, Direction, Input Power, Signal Type

Band 769 MHz – 775 MHz, RF downlink, 0.3 dB < AGC, CW

Band 799 MHz – 805 MHz, RF uplink, 0.3 dB < AGC, CW

Band 769 MHz – 775 MHz, RF downlink, 3 dB > AGC, CW

Band 799 MHz – 805 MHz, RF uplink, 3 dB > AGC, CW

Setup

S01_AA01

S01_AA01

S01_AA01

S01_AA01

FCC

Passed

Passed

Passed

Passed

IC

Passed

Passed

Passed

Passed

47 CFR CHAPTER I FCC PART 90 Subpart R/I [Base Stations/Repeater]

Peak to Average Ratio

The measurement was performed according to ANSI C63.26

Final Result

OP-Mode

Frequency Band, Direction, Input Power, Signal Type

Band 769 MHz – 775 MHz, RF downlink, 0.3 dB < AGC, 4K00F3E

Band 799 MHz – 805 MHz, RF uplink, 0.3 dB < AGC, 4K00F3E

Band 769 MHz – 775 MHz, RF downlink, 0.3 dB < AGC, 11K3F3E

Band 799 MHz – 805 MHz, RF uplink, 0.3 dB < AGC, 11K3F3E

Band 769 MHz – 775 MHz, RF downlink, 0.3 dB < AGC, 8K10F1D

Band 799 MHz – 805 MHz, RF uplink, 0.3 dB < AGC, 8K10F1D

Band 769 MHz – 775 MHz, RF downlink, 0.3 dB < AGC, 9K80D7W

Band 799 MHz – 805 MHz, RF uplink, 0.3 dB < AGC, 9K80D7W

Band 769 MHz – 775 MHz, RF downlink, 0.3 dB < AGC, 16K0F3E

Band 799 MHz – 805 MHz, RF uplink, 0.3 dB < AGC, 16K0F3E

Band 769 MHz – 775 MHz, RF downlink, 3 dB > AGC, 4K00F3E

Band 799 MHz – 805 MHz, RF uplink, 3 dB > AGC, 4K00F3E

Band 769 MHz – 775 MHz, RF downlink, 3 dB > AGC, 11K3F3E

Band 799 MHz – 805 MHz, RF uplink, 3 dB > AGC, 11K3F3E

Band 769 MHz – 775 MHz, RF downlink, 3 dB > AGC, 8K10F1D

Band 799 MHz – 805 MHz, RF uplink, 3 dB > AGC, 8K10F1D

Band 769 MHz – 775 MHz, RF downlink, 3 dB > AGC, 9K80D7W

Band 799 MHz – 805 MHz, RF uplink, 3 dB > AGC, 9K80D7W

Band 769 MHz – 775 MHz, RF downlink, 3 dB > AGC, 16K0F3E

Band 799 MHz – 805 MHz, RF uplink, 3 dB > AGC, 16K0F3E

Setup

S01_AA01

S01_AA01

S01_AA01

S01_AA01

S01_AA01

S01_AA01

S01_AA01

S01_AA01

S01_AA01

S01_AA01

S01_AA01

S01_AA01

S01_AA01

S01_AA01

S01_AA01

S01_AA01

S01_AA01

S01_AA01

S01_AA01

S01_AA01

FCC

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

IC

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

**47 CFR CHAPTER I FCC PART 90 Subpart R/I
[Base Stations/Repeater]**

**§2.1049,
KDB 935210 D02 II (p)(3)**

Occupied Bandwidth / Input-versus-output Spectrum

The measurement was performed according to ANSI C63.26, KDB 935210 D05 v01r03: 3.4

Final Result

OP-Mode

Frequency Band, Direction, Input Power, Signal Type

	Setup	FCC	IC
Band 769 MHz – 775 MHz, RF downlink, 0.3 dB < AGC, 4K00F3E	S01_AA01	Performed	Passed
Band 799 MHz – 805 MHz, RF uplink, 0.3 dB < AGC, 4K00F3E	S01_AA01	Performed	Passed
Band 769 MHz – 775 MHz, RF downlink, 0.3 dB < AGC, 11K3F3E	S01_AA01	Performed	Passed
Band 799 MHz – 805 MHz, RF uplink, 0.3 dB < AGC, 11K3F3E	S01_AA01	Performed	Passed
Band 769 MHz – 775 MHz, RF downlink, 0.3 dB < AGC, 8K10F1D	S01_AA01	Performed	Passed
Band 799 MHz – 805 MHz, RF uplink, 0.3 dB < AGC, 8K10F1D	S01_AA01	Performed	Passed
Band 769 MHz – 775 MHz, RF downlink, 0.3 dB < AGC, 9K80D7W	S01_AA01	Performed	Passed
Band 799 MHz – 805 MHz, RF uplink, 0.3 dB < AGC, 9K80D7W	S01_AA01	Performed	Passed
Band 769 MHz – 775 MHz, RF downlink, 0.3 dB < AGC, 16K0F3E	S01_AA01	Performed	Passed
Band 799 MHz – 805 MHz, RF uplink, 0.3 dB < AGC, 16K0F3E	S01_AA01	Performed	Passed
Band 769 MHz – 775 MHz, RF downlink, 3 dB > AGC, 4K00F3E	S01_AA01	Performed	Passed
Band 799 MHz – 805 MHz, RF uplink, 3 dB > AGC, 4K00F3E	S01_AA01	Performed	Passed
Band 769 MHz – 775 MHz, RF downlink, 3 dB > AGC, 11K3F3E	S01_AA01	Performed	Passed
Band 799 MHz – 805 MHz, RF uplink, 3 dB > AGC, 11K3F3E	S01_AA01	Performed	Passed
Band 769 MHz – 775 MHz, RF downlink, 3 dB > AGC, 8K10F1D	S01_AA01	Performed	Passed
Band 799 MHz – 805 MHz, RF uplink, 3 dB > AGC, 8K10F1D	S01_AA01	Performed	Passed
Band 769 MHz – 775 MHz, RF downlink, 3 dB > AGC, 9K80D7W	S01_AA01	Performed	Passed
Band 799 MHz – 805 MHz, RF uplink, 3 dB > AGC, 9K80D7W	S01_AA01	Performed	Passed
Band 769 MHz – 775 MHz, RF downlink, 3 dB > AGC, 16K0F3E	S01_AA01	Performed	Passed
Band 799 MHz – 805 MHz, RF uplink, 3 dB > AGC, 16K0F3E	S01_AA01	Performed	Passed

**47 CFR CHAPTER I FCC PART 90 Subpart R/I
[Base Stations/Repeater]**

§2.1051, §90.543

Conducted spurious emissions at antenna terminals

The measurement was performed according to ANSI C63.26

Final Result

OP-Mode

Frequency Band, Test Frequency, Direction, Signal Type

	Setup	FCC	IC
Band 769 MHz – 775 MHz, high, RF downlink, CW	S01_AA01	Passed ¹⁾	Passed ¹⁾
Band 799 MHz – 805 MHz, high, RF uplink, CW	S01_AA01	Passed ¹⁾	Passed ¹⁾
Band 769 MHz – 775 MHz, low, RF downlink, CW	S01_AA01	Passed ¹⁾	Passed ¹⁾
Band 799 MHz – 805 MHz, low, RF uplink, CW	S01_AA01	Passed ¹⁾	Passed ¹⁾
Band 769 MHz – 775 MHz, mid, RF downlink, CW	S01_AA01	Passed ¹⁾	Passed ¹⁾
Band 799 MHz – 805 MHz, mid, RF uplink, CW	S01_AA01	Passed ¹⁾	Passed ¹⁾

**47 CFR CHAPTER I FCC PART 90 Subpart R/I
[Base Stations/Repeater]**

**§2.1053, §90.543
KDB 935210 D02 II (p)(3)**

Out-of-band emission limits / Intermodulation

The measurement was performed according to ANSI C63.26, KDB 935210 D05 v01r03: 3.6

Final Result

OP-Mode

Frequency Band, Number of signals, Direction, Input Power, Signal Type

Band 769 MHz – 775 MHz, 2, RF downlink, 0.3 dB < AGC, CW

Band 799 MHz – 805 MHz, 2, RF uplink, 0.3 dB < AGC, CW

Band 769 MHz – 775 MHz, 2, RF downlink, 3 dB > AGC, CW

Band 799 MHz – 805 MHz, 2, RF uplink, 3 dB > AGC, CW

Setup

FCC

IC

S01_AA01

Passed

Passed

S01_AA01

Passed

Passed

S01_AA01

Passed

Passed

S01_AA01

Passed

Passed

**47 CFR CHAPTER I FCC PART 90 Subpart S/I
[Base Stations/Repeater]**

KDB 935210 D02 II (p)(2)

Out-of-band rejection

The measurement was performed according to ANSI C63.26

Final Result

OP-Mode

Frequency Band, Direction

Band 769 MHz – 775 MHz, RF downlink

Band 799 MHz – 805 MHz, RF uplink

Setup

FCC

IC

S01_AA01

Passed

Passed

S01_AA01

Passed

Passed

**47 CFR CHAPTER I FCC PART 90 Subpart R/I
[Base Stations/Repeater]**

§90.219(d)(6)(ii)/(iii), (e)(3)

Noise figure

The measurement was performed according to ANSI C63.26

Final Result

OP-Mode

Frequency Band, Direction, Test Step

Band 769 MHz – 775 MHz, RF downlink, passband

Band 799 MHz – 805 MHz, RF uplink, passband

Setup

FCC

IC

S01_AA01

Passed

Passed

S01_AA01

Passed

Passed

**47 CFR CHAPTER I FCC PART 90 Subpart R/I
[Base Stations/Repeater]**

§2.1053, §90.543

Field strength of spurious radiation

The measurement was performed according to ANSI C63.26

Final Result

OP-Mode

Frequency Band, Test Frequency, Direction

Band 769 MHz – 775 MHz, high, RF downlink

Band 799 MHz – 805 MHz, high, RF uplink

Band 769 MHz – 775 MHz, low, RF downlink

Band 799 MHz – 805 MHz, low, RF uplink

Band 769 MHz – 775 MHz, mid, RF downlink

Band 799 MHz – 805 MHz, mid, RF uplink

Setup

FCC

IC

S01_AA01

Passed

Passed

S01_AA01

Passed

Passed

S01_AA01

Passed

Passed

S01_AA01

Passed

Passed

S01_AA01

Passed

Passed

S01_AA01

Passed

Passed

Band 851 MHz – 854 MHz (Downlink) / 806 MHz – 809 MHz (Uplink)

47 CFR CHAPTER I FCC PART 90 Subpart S/I [Base Stations/Repeater]

**§2.1046, §90.635 (a),
KDB 935210 D02 II (p)(4)**

Effective Radiated Power, mean output power and zone enhancer gain
The measurement was performed according to ANSI C63.26, KDB
935210 D05 v01r03: 3.5

Final Result

OP-Mode

Frequency Band, Direction, Input Power, Signal Type

Band 851 MHz – 854 MHz, RF downlink, 0.3 dB < AGC, CW

Band 806 MHz – 809 MHz, RF uplink, 0.3 dB < AGC, CW

Band 851 MHz – 854 MHz, RF downlink, 3 dB > AGC, CW

Band 806 MHz – 809 MHz, RF uplink, 3 dB > AGC, CW

Setup

S01_AA01

S01_AA01

S01_AA01

S01_AA01

FCC

Passed

Passed

Passed

Passed

IC

Passed

Passed

Passed

Passed

47 CFR CHAPTER I FCC PART 90 Subpart S/I [Base Stations/Repeater]

Peak to Average Ratio

The measurement was performed according to ANSI C63.26

Final Result

OP-Mode

Frequency Band, Direction, Input Power, Signal Type

Band 851 MHz – 854 MHz, RF downlink, 0.3 dB < AGC, 4K00F3E

Band 806 MHz – 809 MHz, RF uplink, 0.3 dB < AGC, 4K00F3E

Band 851 MHz – 854 MHz, RF downlink, 0.3 dB < AGC, 11K3F3E

Band 806 MHz – 809 MHz, RF uplink, 0.3 dB < AGC, 11K3F3E

Band 851 MHz – 854 MHz, RF downlink, 0.3 dB < AGC, 8K10F1D

Band 806 MHz – 809 MHz, RF uplink, 0.3 dB < AGC, 8K10F1D

Band 851 MHz – 854 MHz, RF downlink, 0.3 dB < AGC, 9K80D7W

Band 806 MHz – 809 MHz, RF uplink, 0.3 dB < AGC, 9K80D7W

Band 851 MHz – 854 MHz, RF downlink, 3 dB > AGC, 4K00F3E

Band 806 MHz – 809 MHz, RF uplink, 3 dB > AGC, 4K00F3E

Band 851 MHz – 854 MHz, RF downlink, 3 dB > AGC, 11K3F3E

Band 806 MHz – 809 MHz, RF uplink, 3 dB > AGC, 11K3F3E

Band 851 MHz – 854 MHz, RF downlink, 3 dB > AGC, 8K10F1D

Band 806 MHz – 809 MHz, RF uplink, 3 dB > AGC, 8K10F1D

Band 851 MHz – 854 MHz, RF downlink, 3 dB > AGC, 9K80D7W

Band 806 MHz – 809 MHz, RF uplink, 3 dB > AGC, 9K80D7W

Setup

S01_AA01

S01_AA01

S01_AA01

S01_AA01

S01_AA01

S01_AA01

S01_AA01

S01_AA01

S01_AA01

S01_AA01

S01_AA01

S01_AA01

S01_AA01

S01_AA01

S01_AA01

S01_AA01

FCC

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

IC

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

47 CFR CHAPTER I FCC PART 90 Subpart R/I
[Base Stations/Repeater]

§2.1049,
KDB 935210 D02 II (p)(3)

Occupied Bandwidth / Input-versus-output Spectrum

The measurement was performed according to ANSI C63.26, KDB
 935210 D05 v01r03: 3.4

Final Result

OP-Mode

Frequency Band, Direction, Input Power, Signal Type

	Setup	FCC	IC
Band 851 MHz – 854 MHz, RF downlink, 0.3 dB < AGC, 4K00F3E	S01_AA01	Performed	Passed
Band 806 MHz – 809 MHz, RF uplink, 0.3 dB < AGC, 4K00F3E	S01_AA01	Performed	Passed
Band 851 MHz – 854 MHz, RF downlink, 0.3 dB < AGC, 11K3F3E	S01_AA01	Performed	Passed
Band 806 MHz – 809 MHz, RF uplink, 0.3 dB < AGC, 11K3F3E	S01_AA01	Performed	Passed
Band 851 MHz – 854 MHz, RF downlink, 0.3 dB < AGC, 8K10F1D	S01_AA01	Performed	Passed
Band 806 MHz – 809 MHz, RF uplink, 0.3 dB < AGC, 8K10F1D	S01_AA01	Performed	Passed
Band 851 MHz – 854 MHz, RF downlink, 0.3 dB < AGC, 9K80D7W	S01_AA01	Performed	Passed
Band 806 MHz – 809 MHz, RF uplink, 0.3 dB < AGC, 9K80D7W	S01_AA01	Performed	Passed
Band 851 MHz – 854 MHz, RF downlink, 3 dB > AGC, 4K00F3E	S01_AA01	Performed	Passed
Band 806 MHz – 809 MHz, RF uplink, 3 dB > AGC, 4K00F3E	S01_AA01	Performed	Passed
Band 851 MHz – 854 MHz, RF downlink, 3 dB > AGC, 11K3F3E	S01_AA01	Performed	Passed
Band 806 MHz – 809 MHz, RF uplink, 3 dB > AGC, 11K3F3E	S01_AA01	Performed	Passed
Band 851 MHz – 854 MHz, RF downlink, 3 dB > AGC, 8K10F1D	S01_AA01	Performed	Passed
Band 806 MHz – 809 MHz, RF uplink, 3 dB > AGC, 8K10F1D	S01_AA01	Performed	Passed
Band 851 MHz – 854 MHz, RF downlink, 3 dB > AGC, 9K80D7W	S01_AA01	Performed	Passed
Band 806 MHz – 809 MHz, RF uplink, 3 dB > AGC, 9K80D7W	S01_AA01	Performed	Passed

47 CFR CHAPTER I FCC PART 90 Subpart S/I
[Base Stations/Repeater]

§2.1051, §90.691 (a)(2)

Conducted spurious emissions at antenna terminals

The measurement was performed according to ANSI C63.26

Final Result

OP-Mode

Frequency Band, Test Frequency, Direction, Signal Type

	Setup	FCC	IC
Band 851 MHz – 854 MHz, high, RF downlink, CW	S01_AA01	Passed	Passed
Band 806 MHz – 809 MHz, high, RF uplink, CW	S01_AA01	Passed	Passed
Band 851 MHz – 854 MHz, low, RF downlink, CW	S01_AA01	Passed	Passed
Band 806 MHz – 809 MHz, low, RF uplink, CW	S01_AA01	Passed	Passed
Band 851 MHz – 854 MHz, mid, RF downlink, CW	S01_AA01	Passed	Passed
Band 806 MHz – 809 MHz, mid, RF uplink, CW	S01_AA01	Passed	Passed

**47 CFR CHAPTER I FCC PART 90 Subpart S/I
[Base Stations/Repeater]**

**§2.1053, §90.691 (a)(2)
KDB 935210 D02 II (p)(3)**

Out-of-band emission limits / Intermodulation

The measurement was performed according to ANSI C63.26, KDB 935210 D05 v01r03: 3.6

Final Result

OP-Mode

Frequency Band, Number of signals, Direction, Input Power, Signal Type

Band 851 MHz – 854 MHz, 2, RF downlink, 0.3 dB < AGC, CW

Setup

FCC

IC

S01_AA01

Passed

Passed

Band 806 MHz – 809 MHz, 2, RF uplink, 0.3 dB < AGC, CW

S01_AA01

Passed

Passed

Band 851 MHz – 854 MHz, 2, RF downlink, 3 dB > AGC, CW

S01_AA01

Passed

Passed

Band 806 MHz – 809 MHz, 2, RF uplink, 3 dB > AGC, CW

S01_AA01

Passed

Passed

**47 CFR CHAPTER I FCC PART 90 Subpart S/I
[Base Stations/Repeater]**

KDB 935210 D02 II (p)(2)

Out-of-band rejection

The measurement was performed according to ANSI C63.26

Final Result

OP-Mode

Frequency Band, Direction

Band 851 MHz – 854 MHz, RF downlink

Setup

FCC

IC

S01_AA01

Passed

Passed

Band 806 MHz – 809 MHz, RF uplink

S01_AA01

Passed

Passed

**47 CFR CHAPTER I FCC PART 90 Subpart S/I
[Base Stations/Repeater]**

§90.219(d)(6)(ii)/(iii), (e)(3)

Noise figure

The measurement was performed according to ANSI C63.26

Final Result

OP-Mode

Frequency Band, Direction, Test Step

Band 851 MHz – 854 MHz, RF downlink, passband

Setup

FCC

IC

S01_AA01

Passed

Passed

Band 806 MHz – 809 MHz, RF uplink, passband

S01_AA01

Passed

Passed

**47 CFR CHAPTER I FCC PART 90 Subpart S/I
[Base Stations/Repeater]**

§2.1053, §90.691 (a)(2)

Field strength of spurious radiation

The measurement was performed according to ANSI C63.26

Final Result

OP-Mode

Frequency Band, Test Frequency, Direction

Band 851 MHz – 854 MHz, high, RF downlink

Setup

FCC

IC

S01_AA01

Passed

Passed

Band 806 MHz – 809 MHz, high, RF uplink

S01_AA01

Passed

Passed

Band 851 MHz – 854 MHz, low, RF downlink

S01_AA01

Passed

Passed

Band 806 MHz – 809 MHz, low, RF uplink

S01_AA01

Passed

Passed

Band 851 MHz – 854 MHz, mid, RF downlink

S01_AA01

Passed

Passed

Band 806 MHz – 809 MHz, mid, RF uplink

S01_AA01

Passed

Passed

Band 854 MHz – 862 MHz (Downlink) / 809 MHz – 817 MHz (Uplink)

47 CFR CHAPTER I FCC PART 90 Subpart S/I [Base Stations/Repeater]

**§2.1046, §90.635 (a),
KDB 935210 D02 II (p)(4)**

Effective Radiated Power, mean output power and zone enhancer gain
The measurement was performed according to ANSI C63.26, KDB
935210 D05 v01r03: 3.5

Final Result

OP-Mode

Frequency Band, Direction, Input Power, Signal Type

Band 854 MHz – 862 MHz, RF downlink, 0.3 dB < AGC, CW

Band 809 MHz – 817 MHz, RF uplink, 0.3 dB < AGC, CW

Band 854 MHz – 862 MHz, RF downlink, 3 dB > AGC, CW

Band 809 MHz – 817 MHz, RF uplink, 3 dB > AGC, CW

Setup

S01_AA01

S01_AA01

S01_AA01

S01_AA01

FCC

Passed

Passed

Passed

Passed

IC

Passed

Passed

Passed

Passed

47 CFR CHAPTER I FCC PART 90 Subpart S/I [Base Stations/Repeater]

Peak to Average Ratio

The measurement was performed according to ANSI C63.26

Final Result

OP-Mode

Frequency Band, Direction, Input Power, Signal Type

Band 854 MHz – 862 MHz, RF downlink, 0.3 dB < AGC, 4K00F3E

Band 809 MHz – 817 MHz, RF uplink, 0.3 dB < AGC, 4K00F3E

Band 854 MHz – 862 MHz, RF downlink, 0.3 dB < AGC, 11K3F3E

Band 809 MHz – 817 MHz, RF uplink, 0.3 dB < AGC, 11K3F3E

Band 854 MHz – 862 MHz, RF downlink, 0.3 dB < AGC, 8K10F1D

Band 809 MHz – 817 MHz, RF uplink, 0.3 dB < AGC, 8K10F1D

Band 854 MHz – 862 MHz, RF downlink, 0.3 dB < AGC, 9K80D7W

Band 809 MHz – 817 MHz, RF uplink, 0.3 dB < AGC, 9K80D7W

Band 854 MHz – 862 MHz, RF downlink, 3 dB > AGC, 4K00F3E

Band 809 MHz – 817 MHz, RF uplink, 3 dB > AGC, 4K00F3E

Band 854 MHz – 862 MHz, RF downlink, 3 dB > AGC, 11K3F3E

Band 809 MHz – 817 MHz, RF uplink, 3 dB > AGC, 11K3F3E

Band 854 MHz – 862 MHz, RF downlink, 3 dB > AGC, 8K10F1D

Band 809 MHz – 817 MHz, RF uplink, 3 dB > AGC, 8K10F1D

Band 854 MHz – 862 MHz, RF downlink, 3 dB > AGC, 9K80D7W

Band 809 MHz – 817 MHz, RF uplink, 3 dB > AGC, 9K80D7W

Setup

S01_AA01

S01_AA01

S01_AA01

S01_AA01

S01_AA01

S01_AA01

S01_AA01

S01_AA01

S01_AA01

S01_AA01

S01_AA01

S01_AA01

S01_AA01

S01_AA01

S01_AA01

S01_AA01

FCC

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

IC

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

47 CFR CHAPTER I FCC PART 90 Subpart R/I
[Base Stations/Repeater]

§2.1049,
KDB 935210 D02 II (p)(3)

Occupied Bandwidth / Input-versus-output Spectrum

The measurement was performed according to ANSI C63.26, KDB
 935210 D05 v01r03: 3.4

Final Result

OP-Mode

Frequency Band, Direction, Input Power, Signal Type

	Setup	FCC	IC
Band 854 MHz – 862 MHz, RF downlink, 0.3 dB < AGC, 4K00F3E	S01_AA01	Performed	Passed
Band 809 MHz – 817 MHz, RF uplink, 0.3 dB < AGC, 4K00F3E	S01_AA01	Performed	Passed
Band 854 MHz – 862 MHz, RF downlink, 0.3 dB < AGC, 11K3F3E	S01_AA01	Performed	Passed
Band 809 MHz – 817 MHz, RF uplink, 0.3 dB < AGC, 11K3F3E	S01_AA01	Performed	Passed
Band 854 MHz – 862 MHz, RF downlink, 0.3 dB < AGC, 8K10F1D	S01_AA01	Performed	Passed
Band 809 MHz – 817 MHz, RF uplink, 0.3 dB < AGC, 8K10F1D	S01_AA01	Performed	Passed
Band 854 MHz – 862 MHz, RF downlink, 0.3 dB < AGC, 9K80D7W	S01_AA01	Performed	Passed
Band 809 MHz – 817 MHz, RF uplink, 0.3 dB < AGC, 9K80D7W	S01_AA01	Performed	Passed
Band 854 MHz – 862 MHz, RF downlink, 3 dB > AGC, 4K00F3E	S01_AA01	Performed	Passed
Band 809 MHz – 817 MHz, RF uplink, 3 dB > AGC, 4K00F3E	S01_AA01	Performed	Passed
Band 854 MHz – 862 MHz, RF downlink, 3 dB > AGC, 11K3F3E	S01_AA01	Performed	Passed
Band 809 MHz – 817 MHz, RF uplink, 3 dB > AGC, 11K3F3E	S01_AA01	Performed	Passed
Band 854 MHz – 862 MHz, RF downlink, 3 dB > AGC, 8K10F1D	S01_AA01	Performed	Passed
Band 809 MHz – 817 MHz, RF uplink, 3 dB > AGC, 8K10F1D	S01_AA01	Performed	Passed
Band 854 MHz – 862 MHz, RF downlink, 3 dB > AGC, 9K80D7W	S01_AA01	Performed	Passed
Band 809 MHz – 817 MHz, RF uplink, 3 dB > AGC, 9K80D7W	S01_AA01	Performed	Passed

47 CFR CHAPTER I FCC PART 90 Subpart S/I
[Base Stations/Repeater]

§2.1051, §90.691 (a)(2)

Conducted spurious emissions at antenna terminals

The measurement was performed according to ANSI C63.26

Final Result

OP-Mode

Frequency Band, Test Frequency, Direction, Signal Type

	Setup	FCC	IC
Band 854 MHz – 862 MHz, high, RF downlink, CW	S01_AA01	Passed	Passed
Band 809 MHz – 817 MHz, high, RF uplink, CW	S01_AA01	Passed	Passed
Band 854 MHz – 862 MHz, low, RF downlink, CW	S01_AA01	Passed	Passed
Band 809 MHz – 817 MHz, low, RF uplink, CW	S01_AA01	Passed	Passed
Band 854 MHz – 862 MHz, mid, RF downlink, CW	S01_AA01	Passed	Passed
Band 809 MHz – 817 MHz, mid, RF uplink, CW	S01_AA01	Passed	Passed

**47 CFR CHAPTER I FCC PART 90 Subpart S/I
[Base Stations/Repeater]**

**§2.1053, §90.691 (a)(2)
KDB 935210 D02 II (p)(3)**

Out-of-band emission limits / Intermodulation

The measurement was performed according to ANSI C63.26, KDB 935210 D05 v01r03: 3.6

Final Result

OP-Mode

Frequency Band, Number of signals, Direction, Input Power, Signal Type

Band 854 MHz – 862 MHz, 2, RF downlink, 0.3 dB < AGC, CW

Setup

FCC

IC

S01_AA01

Passed

Passed

Band 809 MHz – 817 MHz, 2, RF uplink, 0.3 dB < AGC, CW

S01_AA01

Passed

Passed

Band 854 MHz – 862 MHz, 2, RF downlink, 3 dB > AGC, CW

S01_AA01

Passed

Passed

Band 809 MHz – 817 MHz, 2, RF uplink, 3 dB > AGC, CW

S01_AA01

Passed

Passed

**47 CFR CHAPTER I FCC PART 90 Subpart S/I
[Base Stations/Repeater]**

KDB 935210 D02 II (p)(2)

Out-of-band rejection

The measurement was performed according to ANSI C63.26

Final Result

OP-Mode

Frequency Band, Direction

Band 854 MHz – 862 MHz, RF downlink

Setup

FCC

IC

S01_AA01

Passed

Passed

Band 809 MHz – 817 MHz, RF uplink

S01_AA01

Passed

Passed

**47 CFR CHAPTER I FCC PART 90 Subpart S/I
[Base Stations/Repeater]**

§90.219(d)(6)(ii)/(iii), (e)(3)

Noise figure

The measurement was performed according to ANSI C63.26

Final Result

OP-Mode

Frequency Band, Direction, Test Step

Band 854 MHz – 862 MHz, RF downlink, passband

Setup

FCC

IC

S01_AA01

Passed

Passed

Band 809 MHz – 817 MHz, RF uplink, passband

S01_AA01

Passed

Passed

**47 CFR CHAPTER I FCC PART 90 Subpart S/I
[Base Stations/Repeater]**

§2.1053, §90.691 (a)(2)

Field strength of spurious radiation

The measurement was performed according to ANSI C63.26

Final Result

OP-Mode

Frequency Band, Test Frequency, Direction

Band 854 MHz – 862 MHz, high, RF downlink

Setup

FCC

IC

S01_AA01

Passed

Passed

Band 809 MHz – 817 MHz, high, RF uplink

S01_AA01

Passed

Passed

Band 854 MHz – 862 MHz, low, RF downlink

S01_AA01

Passed

Passed

Band 809 MHz – 817 MHz, low, RF uplink

S01_AA01

Passed

Passed

Band 854 MHz – 862 MHz, mid, RF downlink

S01_AA01

Passed

Passed

Band 809 MHz – 817 MHz, mid, RF uplink

S01_AA01

Passed

Passed

Band 862 MHz – 869 MHz (Downlink) / 817 MHz – 824 MHz (Uplink)

47 CFR CHAPTER I FCC PART 90 Subpart S/I [Base Stations/Repeater]

§2.1046, §90.635 (a),
KDB 935210 D02 II (p)(4)

Effective Radiated Power, mean output power and zone enhancer gain
The measurement was performed according to ANSI C63.26, KDB
935210 D05 v01r03: 3.5

Final Result

OP-Mode

Frequency Band, Direction, Input Power, Signal Type

Band 862 MHz – 869 MHz, RF downlink, 0.3 dB < AGC, CW

Band 817 MHz – 824 MHz, RF uplink, 0.3 dB < AGC, CW

Band 862 MHz – 869 MHz, RF downlink, 3 dB > AGC, CW

Band 817 MHz – 824 MHz, RF uplink, 3 dB > AGC, CW

Setup

S01_AA01

S01_AA01

S01_AA01

S01_AA01

FCC

Passed

Passed

Passed

Passed

IC

Passed

Passed

Passed

Passed

47 CFR CHAPTER I FCC PART 90 Subpart S/I [Base Stations/Repeater]

Peak to Average Ratio

The measurement was performed according to ANSI C63.26

Final Result

OP-Mode

Frequency Band, Direction, Input Power, Signal Type

Band 862 MHz – 869 MHz, RF downlink, 0.3 dB < AGC, 4K00F3E

Band 817 MHz – 824 MHz, RF uplink, 0.3 dB < AGC, 4K00F3E

Band 862 MHz – 869 MHz, RF downlink, 0.3 dB < AGC, 11K3F3E

Band 817 MHz – 824 MHz, RF uplink, 0.3 dB < AGC, 11K3F3E

Band 862 MHz – 869 MHz, RF downlink, 0.3 dB < AGC, 8K10F1D

Band 817 MHz – 824 MHz, RF uplink, 0.3 dB < AGC, 8K10F1D

Band 862 MHz – 869 MHz, RF downlink, 0.3 dB < AGC, 9K80D7W

Band 817 MHz – 824 MHz, RF uplink, 0.3 dB < AGC, 9K80D7W

Band 862 MHz – 869 MHz, RF downlink, 0.3 dB < AGC, 16K0F3E

Band 817 MHz – 824 MHz, RF uplink, 0.3 dB < AGC, 16K0F3E

Band 862 MHz – 869 MHz, RF downlink, 3 dB > AGC, 4K00F3E

Band 817 MHz – 824 MHz, RF uplink, 3 dB > AGC, 4K00F3E

Band 862 MHz – 869 MHz, RF downlink, 3 dB > AGC, 11K3F3E

Band 817 MHz – 824 MHz, RF uplink, 3 dB > AGC, 11K3F3E

Band 862 MHz – 869 MHz, RF downlink, 3 dB > AGC, 8K10F1D

Band 817 MHz – 824 MHz, RF uplink, 3 dB > AGC, 8K10F1D

Band 862 MHz – 869 MHz, RF downlink, 3 dB > AGC, 9K80D7W

Band 817 MHz – 824 MHz, RF uplink, 3 dB > AGC, 9K80D7W

Band 862 MHz – 869 MHz, RF downlink, 3 dB > AGC, 16K0F3E

Band 817 MHz – 824 MHz, RF uplink, 3 dB > AGC, 16K0F3E

Setup

S01_AA01

S01_AA01

S01_AA01

S01_AA01

S01_AA01

S01_AA01

S01_AA01

S01_AA01

S01_AA01

S01_AA01

S01_AA01

S01_AA01

S01_AA01

S01_AA01

S01_AA01

S01_AA01

S01_AA01

S01_AA01

S01_AA01

S01_AA01

FCC

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

IC

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

**47 CFR CHAPTER I FCC PART 90 Subpart R/I
[Base Stations/Repeater]**

**§2.1049,
KDB 935210 D02 II (p)(3)**

Occupied Bandwidth / Input-versus-output Spectrum

The measurement was performed according to ANSI C63.26, KDB 935210 D05 v01r03: 3.4

Final Result

OP-Mode

Frequency Band, Direction, Input Power, Signal Type

	Setup	FCC	IC
Band 862 MHz – 869 MHz, RF downlink, 0.3 dB < AGC, 4K00F3E	S01_AA01	Performed	Passed
Band 817 MHz – 824 MHz, RF uplink, 0.3 dB < AGC, 4K00F3E	S01_AA01	Performed	Passed
Band 862 MHz – 869 MHz, RF downlink, 0.3 dB < AGC, 11K3F3E	S01_AA01	Performed	Passed
Band 817 MHz – 824 MHz, RF uplink, 0.3 dB < AGC, 11K3F3E	S01_AA01	Performed	Passed
Band 862 MHz – 869 MHz, RF downlink, 0.3 dB < AGC, 8K10F1D	S01_AA01	Performed	Passed
Band 817 MHz – 824 MHz, RF uplink, 0.3 dB < AGC, 8K10F1D	S01_AA01	Performed	Passed
Band 862 MHz – 869 MHz, RF downlink, 0.3 dB < AGC, 9K80D7W	S01_AA01	Performed	Passed
Band 817 MHz – 824 MHz, RF uplink, 0.3 dB < AGC, 9K80D7W	S01_AA01	Performed	Passed
Band 862 MHz – 869 MHz, RF downlink, 0.3 dB < AGC, 16K0F3E	S01_AA01	Performed	Passed
Band 817 MHz – 824 MHz, RF uplink, 0.3 dB < AGC, 16K0F3E	S01_AA01	Performed	Passed
Band 862 MHz – 869 MHz, RF downlink, 3 dB > AGC, 4K00F3E	S01_AA01	Performed	Passed
Band 817 MHz – 824 MHz, RF uplink, 3 dB > AGC, 4K00F3E	S01_AA01	Performed	Passed
Band 862 MHz – 869 MHz, RF downlink, 3 dB > AGC, 11K3F3E	S01_AA01	Performed	Passed
Band 817 MHz – 824 MHz, RF uplink, 3 dB > AGC, 11K3F3E	S01_AA01	Performed	Passed
Band 862 MHz – 869 MHz, RF downlink, 3 dB > AGC, 8K10F1D	S01_AA01	Performed	Passed
Band 817 MHz – 824 MHz, RF uplink, 3 dB > AGC, 8K10F1D	S01_AA01	Performed	Passed
Band 862 MHz – 869 MHz, RF downlink, 3 dB > AGC, 9K80D7W	S01_AA01	Performed	Passed
Band 817 MHz – 824 MHz, RF uplink, 3 dB > AGC, 9K80D7W	S01_AA01	Performed	Passed
Band 862 MHz – 869 MHz, RF downlink, 3 dB > AGC, 16K0F3E	S01_AA01	Performed	Passed
Band 817 MHz – 824 MHz, RF uplink, 3 dB > AGC, 16K0F3E	S01_AA01	Performed	Passed

**47 CFR CHAPTER I FCC PART 90 Subpart S/I
[Base Stations/Repeater]**

§2.1051, §90.691 (a)(2)

Conducted spurious emissions at antenna terminals

The measurement was performed according to ANSI C63.26

Final Result

OP-Mode

Frequency Band, Test Frequency, Direction, Signal Type

	Setup	FCC	IC
Band 862 MHz – 869 MHz, high, RF downlink, CW	S01_AA01	Passed	Passed
Band 817 MHz – 824 MHz, high, RF uplink, CW	S01_AA01	Passed	Passed
Band 862 MHz – 869 MHz, low, RF downlink, CW	S01_AA01	Passed	Passed
Band 817 MHz – 824 MHz, low, RF uplink, CW	S01_AA01	Passed	Passed
Band 862 MHz – 869 MHz, mid, RF downlink, CW	S01_AA01	Passed	Passed
Band 817 MHz – 824 MHz, mid, RF uplink, CW	S01_AA01	Passed	Passed

**47 CFR CHAPTER I FCC PART 90 Subpart S/I
[Base Stations/Repeater]**
**§2.1053, §90.691 (a)(2)
KDB 935210 D02 II (p)(3)**

Out-of-band emission limits / Intermodulation

The measurement was performed according to ANSI C63.26, KDB 935210 D05 v01r03: 3.6

Final Result
OP-Mode

Frequency Band, Number of signals, Direction, Input Power, Signal Type

	Setup	FCC	IC
Band 862 MHz – 869 MHz, 2, RF downlink, 0.3 dB < AGC, CW	S01_AA01	Passed	Passed
Band 817 MHz – 824 MHz, 2, RF uplink, 0.3 dB < AGC, CW	S01_AA01	Passed	Passed
Band 862 MHz – 869 MHz, 2, RF downlink, 3 dB > AGC, CW	S01_AA01	Passed	Passed
Band 817 MHz – 824 MHz, 2, RF uplink, 3 dB > AGC, CW	S01_AA01	Passed	Passed

**47 CFR CHAPTER I FCC PART 90 Subpart S/I
[Base Stations/Repeater]**
KDB 935210 D02 II (p)(2)

Out-of-band rejection

The measurement was performed according to ANSI C63.26

Final Result
OP-Mode

Frequency Band, Direction

	Setup	FCC	IC
Band 862 MHz – 869 MHz, RF downlink	S01_AA01	Passed	Passed
Band 817 MHz – 824 MHz, RF uplink	S01_AA01	Passed	Passed

**47 CFR CHAPTER I FCC PART 90 Subpart S/I
[Base Stations/Repeater]**
§90.219(d)(6)(ii)/(iii), (e)(3)

Noise figure

The measurement was performed according to ANSI C63.26

Final Result
OP-Mode

Frequency Band, Direction, Test Step

	Setup	FCC	IC
Band 862 MHz – 869 MHz, RF downlink, passband	S01_AA01	Passed	Passed
Band 817 MHz – 824 MHz, RF uplink, passband	S01_AA01	Passed	Passed

**47 CFR CHAPTER I FCC PART 90 Subpart S/I
[Base Stations/Repeater]**
§2.1053, §90.691 (a)(2)

Field strength of spurious radiation

The measurement was performed according to ANSI C63.26

Final Result
OP-Mode

Frequency Band, Test Frequency, Direction

	Setup	FCC	IC
Band 862 MHz – 869 MHz, high, RF downlink	S01_AA01	Passed	Passed
Band 817 MHz – 824 MHz, high, RF uplink	S01_AA01	Passed	Passed
Band 862 MHz – 869 MHz, low, RF downlink	S01_AA01	Passed	Passed
Band 817 MHz – 824 MHz, low, RF uplink	S01_AA01	Passed	Passed
Band 862 MHz – 869 MHz, mid, RF downlink	S01_AA01	Passed	Passed
Band 817 MHz – 824 MHz, mid, RF uplink	S01_AA01	Passed	Passed


- 1) Final noise level of repeater for bands 769-775, 799-805 measured with reduced amplifier gain.

The test case frequency stability was not performed, since the EUT is not equipped with signal processing capabilities.

Report version control			
Version	Release date	Change Description	Version validity
initial	2019-09-19	--	invalid
rev1	2019-10-24	Added sample calculation p.31 Added comment for noise in pass band test case on this page and removed respective chapter. Added plots with 10 dB reduction in amplification for bands 769-775 and 799-805	invalid
rev2	2019-11-06	Noise figure results added	valid



(responsible for accreditation scope)
Dipl.-Ing. Marco Kullik



(responsible for testing and report)
B.Sc. Jens Dörwald



7 layers GmbH, Borsigstr. 11
40880 Ratingen, Germany
Phone +49 (0)2102 749 0

2 ADMINISTRATIVE DATA

2.1 TESTING LABORATORY

Company Name: 7layers GmbH
Address: Borsigstr. 11
40880 Ratingen
Germany

The test facility is accredited by the following accreditation organisation:

Laboratory accreditation no: DAkKS D-PL-12140-01-00
FCC Designation Number: DE0015
FCC Test Firm Registration: 929146
ISED CAB Identifier: DE0007; ISED#:3699A
Responsible for accreditation scope: Dipl.-Ing. Marco Kullik
Report Template Version: 2019-03-11

2.2 PROJECT DATA

Responsible for testing and report: B.Sc. Jens Dörwald
Employees who performed the tests: documented internally at 7Layers
Date of Report: 2019-11-06
Testing Period: 2019-06-25 to 2019-09-16

2.3 APPLICANT DATA

Company Name: Commscope
Andrew Wireless Systems GmbH
Address: Industriering 10
86675 Buchdorf
Germany
Contact Person: Mr. Frank Futter

2.4 MANUFACTURER DATA

Company Name: please see applicant data
Address:
Contact Person:

3 TEST OBJECT DATA

3.1 GENERAL EUT DESCRIPTION

Kind of Device product description	Cellular Repeater
Product name	Cellular Repeater
Type	PSR 7/8 B
Declared EUT data by the supplier	
General Product Description	The EUT is an industrial signal booster supporting the following: Downlink / Uplink Band 758-768 MHz / 788-798 MHz Band 769-775 MHz / 799-805 MHz Band 851-854 MHz / 806-809 MHz Band 854-862 MHz / 809-817 MHz Band 862-869 MHz / 817-824 MHz
Booster Type	Industrial Signal Booster
Voltage Type	AC
Voltage Level	88 – 264 V, 47 – 63 Hz
Maximum Output Donor Port [Uplink]	Band 788-798 MHz: 27.0 dBm Band 799-805 MHz: 27.9 dBm Band 806-809 MHz: 26.7 dBm Band 809-817 MHz: 27.3 dBm Band 817-824 MHz: 27.4 dBm
Maximum Output Server Port [Downlink]	Band 758-768 MHz: 27.8 dBm Band 769-775 MHz: 32.2 dBm Band 851-854 MHz: 32.7 dBm Band 854-862 MHz: 27.4 dBm Band 862-869 MHz: 33.1 dBm
Maximum Gain [Uplink]	Band 788-798 MHz: 88.1 dB Band 799-805 MHz: 89.7 dB Band 806-809 MHz: 88.6 dB Band 809-817 MHz: 89.4 dB Band 817-824 MHz: 88.5 dB
Maximum Gain [Downlink]	Band 758-768 MHz: 89.9 dB Band 769-775 MHz: 89.5 dB Band 851-854 MHz: 89.0 dB Band 854-862 MHz: 89.1 dB Band 862-869 MHz: 89.2 dB

The main components of the EUT are listed and described in chapter 3.2 EUT Main components.

3.2 EUT MAIN COMPONENTS

Sample Name	Sample Code	Description
EUT A	DE1277013aa01	FCC sample
Sample Parameter	Value	
Serial Number	190405BA001	
HW Version	7831851-0001	
SW Version	SW V01.00.00.44	
Comment	-	

NOTE: The short description is used to simplify the identification of the EUT in this test report.

3.3 ANCILLARY EQUIPMENT

For the purposes of this test report, ancillary equipment is defined as equipment which is used in conjunction with the EUT to provide operational and control features to the EUT. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Ancillary Equipment can influence the test results.

Device	Details (Manufacturer, Type Model, OUT Code)	Description
-	-	-

3.4 AUXILIARY EQUIPMENT

For the purposes of this test report, auxiliary equipment is defined as equipment which is used temporarily to enable operational and control features especially used for the tests of the EUT which is not used during normal operation or equipment that is used during the tests in combination with the EUT but is not subject of this test report. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Auxiliary Equipment can influence the test results.

Device	Details (Manufacturer, HW, SW, S/N)	Description
-	-	-

3.5 EUT SETUPS

This chapter describes the combination of EUTs and equipment used for testing. The rationale for selecting the EUTs, ancillary and auxiliary equipment and interconnecting cables, is to test a representative configuration meeting the requirements of the referenced standards.

Setup	Combination of EUTs	Description and Rationale
S01_AA01	EUT A	Setup for all tests

3.6 OPERATING MODES

This chapter describes the operating modes of the EUTs used for testing.

3.6.1 TEST CHANNELS

Band [MHz]	Direction	Lower Frequency Band Edge [MHz]	Upper Frequency Band Edge [MHz]	Center Frequency [MHz]	Port
758 - 768	downlink	760.5000	765.5000	763.0000	Donor
769 - 775	downlink	769.0125	774.9875	772.0000	Donor
851 - 854	downlink	851.0125	853.9875	852.5000	Donor
854 - 862	downlink	854.0125	861.9875	858.0000	Donor
862 - 869	downlink	862.0125	868.9875	865.5000	Donor
788 - 798	uplink	790.5000	795.5000	793.0000	ANT
799 - 805	uplink	799.0125	804.9875	802.0000	ANT
806 - 809	uplink	806.0125	808.9875	807.5000	ANT
809 - 817	uplink	809.0125	816.9875	813.0000	ANT
817 - 824	uplink	817.0125	823.9875	820.5000	ANT

3.6.2 AUTOMATIC GAIN CONTROL LEVELS

Downlink

AGC Levels							
Band [MHz]	Direction	Emission Designator	AGC Start Pin [dBm]	AGC Start Pin -0.3 dB [dBm]	AGC Start Pin +3 dB [dBm]	Frequency [MHz]	Frequency
758 - 768	downlink	CW	-57.4	-57.7	-54.4	763.0000	f_m
758 - 768	downlink	CW	-57.2	-57.5	-54.2	760.5000	f_{low}
758 - 768	downlink	CW	-57.6	-57.0	-54.6	765.5000	f_{high}
758 - 768	downlink	CW	-57.4	-57.7	-54.4	767.2496	f_0
769 - 775	downlink	CW	-56.2	-56.5	-53.2	772.0000	f_m
769 - 775	downlink	CW	-56.6	-56.9	-53.6	769.0125	f_{low}
769 - 775	downlink	CW	-56.0	-56.3	-53.0	774.9875	f_{high}
769 - 775	downlink	CW	-57.2	-57.5	-54.2	769.3000	f_0
851 - 854	downlink	CW	-56.0	-56.3	-53.0	852.5000	f_m
851 - 854	downlink	CW	-55.2	-55.5	-52.2	851.0125	f_{low}
851 - 854	downlink	CW	-56.4	-56.7	-53.4	853.9875	f_{high}
851 - 854	downlink	CW	-56.4	-56.7	-53.4	853.7325	f_0
854 - 862	downlink	CW	-55.8	-56.1	-52.8	858.0000	f_m
854 - 862	downlink	CW	-56.2	-56.5	-53.2	854.0125	f_{low}
854 - 862	downlink	CW	-56.0	-56.3	-53.0	861.9875	f_{high}
854 - 862	downlink	CW	-56.2	-56.5	-53.2	859.2465	f_0
862 - 869	downlink	CW	-55.8	-56.1	-52.8	865.5000	f_m
862 - 869	downlink	CW	-56.0	-56.3	-53.0	862.0125	f_{low}
862 - 869	downlink	CW	-55.2	-55.5	-52.2	868.9875	f_{high}
862 - 869	downlink	CW	-56.2	-56.5	-53.2	863.4002	f_0

Uplink

AGC Levels							
Band [MHz]	Direction	Emission Designator	AGC Start Pin [dBm]	AGC Start Pin -0.3 dB [dBm]	AGC Start Pin +3 dB [dBm]	Frequency [MHz]	Frequency
788 – 798	uplink	CW	-60.8	-61.1	-57.8	793.0000	f_m
788 – 798	uplink	CW	-61.0	-61.3	-58.0	790.5000	f_{low}
788 – 798	uplink	CW	-60.2	-60.5	-57.2	795.5000	f_{high}
788 – 798	uplink	CW	-60.8	-61.1	-57.8	792.0051	f_0
799 – 805	uplink	CW	-60.8	-61.1	-57.8	802,0000	f_m
799 – 805	uplink	CW	-61.8	-62.1	-58.8	799,0125	f_{low}
799 – 805	uplink	CW	-60.4	-60.7	-57.4	804,9875	f_{high}
799 – 805	uplink	CW	-61.8	-62.1	-58.8	799,6992	f_0
806 – 809	uplink	CW	-61.4	-61.7	-58.4	807,5000	f_m
806 – 809	uplink	CW	-61.0	-61.3	-58.0	806,0125	f_{low}
806 – 809	uplink	CW	-61.4	-61.7	-58.4	808,9875	f_{high}
806 – 809	uplink	CW	-61.8	-62.1	-58.8	808,2521	f_0
809 – 817	uplink	CW	-61.2	-61.5	-58.2	813,0000	f_m
809 – 817	uplink	CW	-61.6	-61.9	-58.6	809,0125	f_{low}
809 – 817	uplink	CW	-61.4	-61.7	-58.4	816,9875	f_{high}
809 – 817	uplink	CW	-61.8	-62.1	-58.8	816,0467	f_0
817 - 824	uplink	CW	-60.8	-61.1	-57.8	820,5000	f_m
817 - 824	uplink	CW	-61.4	-61.7	-58.4	817,0125	f_{low}
817 - 824	uplink	CW	-61.2	-61.5	-58.2	823,9875	f_{high}
817 - 824	uplink	CW	-61.2	-61.5	-58.2	823,9020	f_0

3.7 PRODUCT LABELLING

3.7.1 FCC ID LABEL

Please refer to the documentation of the applicant.

3.7.2 LOCATION OF THE LABEL ON THE EUT

Please refer to the documentation of the applicant.

4 TEST RESULTS

4.1 EFFECTIVE RADIATED POWER, MEAN OUTPUT POWER AND ZONE ENHANCER GAIN


Standard FCC Part 90, §90.635, §90.542

The test was performed according to:
ANSI C63.26, KDB 935210 D05 v01r03: 3.5

4.1.1 TEST DESCRIPTION

This test case is intended to demonstrate compliance to the signal booster power and gain limits and requirements for industrial signal boosters.

The EUT was connected to the test setup according to the following diagram:

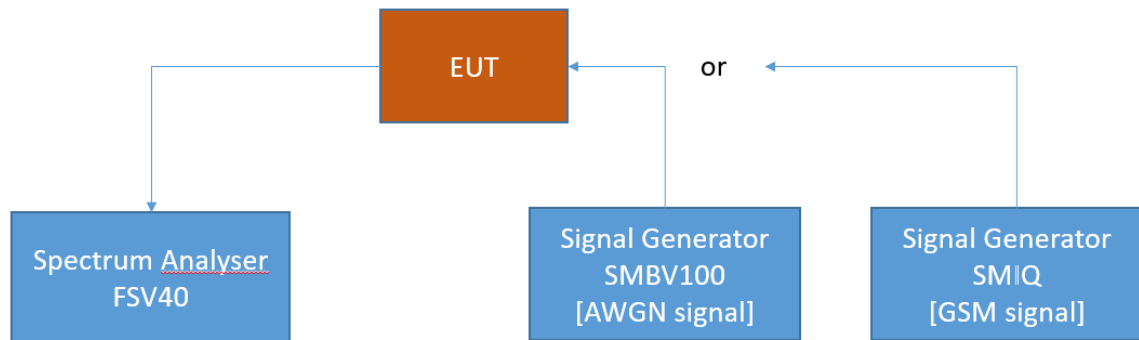

FCC Part 22/24/27/90 Industrial signal booster – Test Setup; RF Output Power / Gain

The attenuation of the measuring and stimulus path are known for each measured frequency and are considered.

The Spectrum Analyzer settings can be directly found in the measurement diagrams.

4.1.2 TEST REQUIREMENTS / LIMITS

FCC Part 90

§90.219 (d)(3)(i)

The output power capability of a signal booster must be designed for deployments providing a radiated power not exceeding 5 Watts ERP for each retransmitted channel.

KDB 935210 D02

V. PART 90 SIGNAL BOOSTER SPECIFIC REQUIREMENTS

(j) Other provisions for part 90 boosters in specific bands and/or for specific conditions.

(1) Equipment authorizations to support both Section 90.219 and higher power operations. For devices that support output power higher than the 5 W ERP limit of Section 90.219, and are intended for marketing and subsequent US non-federal (FCC) station operations both within and outside the scope of the Section 90.219 authorization and deployment framework,8 for equipment authorization purposes the following provisions apply.

(i) For equipment to be certified as acceptable for Section 90.219(b) operations, B9A and B9B Form 731 applications must contain test data, install/operating instructions, etc., specifically for the Section 90.219(e) requirements, along with the usual Sections 2.911(c), 2.1033(c), 90.203, and associated contents requirements. In addition, the B9A or B9B application must contain test data, install/operating instructions, etc., for other intended and supported maximum output powers and maximum emissions end-use configurations.

(ii) Per the usual OET practice, the highest output powers for each emission mode are listed on Form 731 line entries. It is preferred, however not required, that the Section 90.219 associated emission modes (reflecting maximum 5 W ERP) are also separately listed on the Form 731 line entries. A grant comment should be applied that specific station authorizations are required for equipment operations exceeding Section 90.219 conditions.

Band 26 / 27 (862 MHz – 869 MHz)

§ 90.635

(a) The effective radiated power and antenna height for base stations may not exceed 1 kilowatt (30 dBw) and 304 m. (1,000 ft.) above average terrain (AAT), respectively, or the equivalent thereof as determined from the Table. These are maximum values, and applicants will be required to justify power levels and antenna heights requested.

Band 14 (758 MHz – 768 MHz)

§90.542 (a)(3)

(a) The following power limits apply to the 758-768/788-798 MHz band:

(3) Fixed and base stations transmitting a signal in the 758-768 MHz band with an emission bandwidth greater than 1 MHz must not exceed an ERP of 1000 watts/MHz and an antenna height of 305 m HAAT, except that antenna heights greater than 305 m HAAT are permitted if power levels are reduced below 1000 watts/MHz ERP accordance with Table 3 of this section.

4.1.3 TEST PROTOCOL

Band 758 MHz – 768 MHz, downlink							
Emission Designator	Input Power	Frequency f_0 [MHz]	Input Power [dBm]	Maximum Average Output Power [dBm]	Limit Average Output Power [dBm]	Margin to Limit [dB]	Gain [dB]
CW	0.3 dB < AGC	767.2496	-57.5	32.4	60.0	27.6	89.9
CW	3 dB > AGC	767.2496	-54.4	32.2	60.0	27.8	86.6

Band 769 MHz – 775 MHz, downlink							
Emission Designator	Input Power	Frequency f_0 [MHz]	Input Power [dBm]	Maximum Average Output Power [dBm]	Limit Average Output Power [dBm]	Margin to Limit [dB]	Gain [dB]
CW	0.3 dB < AGC	769.3000	-57.5	32.0	33.0	1.0	89.5
CW	3 dB > AGC	769.3000	-54.2	32.2	33.0	0.8	86.6

Band 851 MHz – 854 MHz, downlink							
Emission Designator	Input Power	Frequency f_0 [MHz]	Input Power [dBm]	Maximum Average Output Power [dBm]	Limit Average Output Power [dBm]	Margin to Limit [dB]	Gain [dB]
CW	0.3 dB < AGC	853.7325	-56.7	32.3	60.0	27.7	89.0
CW	3 dB > AGC	853.7325	-53.4	32.7	60.0	27.3	86.1

Band 854 MHz – 862 MHz, downlink							
Emission Designator	Input Power	Frequency f_0 [MHz]	Input Power [dBm]	Maximum Average Output Power [dBm]	Limit Average Output Power [dBm]	Margin to Limit [dB]	Gain [dB]
CW	0.3 dB < AGC	859.2465	-56.5	32.6	60.0	27.4	89.1
CW	3 dB > AGC	859.2465	-53.2	33.0	60.0	27.0	86.2

Band 862 MHz – 869 MHz, downlink							
Emission Designator	Input Power	Frequency f_0 [MHz]	Input Power [dBm]	Maximum Average Output Power [dBm]	Limit Average Output Power [dBm]	Margin to Limit [dB]	Gain [dB]
CW	0.3 dB < AGC	863.4002	-56.5	32.7	60.0	27.3	89.2
CW	3 dB > AGC	863.4002	-53.2	33.1	60.0	26.9	86.3

Band 788 MHz – 798 MHz, uplink							
Emission Designator	Input Power	Frequency f_0 [MHz]	Input Power [dBm]	Maximum Average Output Power [dBm]	Limit Average Output Power [dBm]	Margin to Limit [dB]	Gain [dB]
CW	0.3 dB < AGC	792.0051	-61.1	27.0	60.0	33.0	88.1
CW	3 dB > AGC	792.0051	-57.8	26.8	60.0	33.2	84.6

Band 799 MHz – 805 MHz, uplink							
Emission Designator	Input Power	Frequency f_0 [MHz]	Input Power [dBm]	Maximum Average Output Power [dBm]	Limit Average Output Power [dBm]	Margin to Limit [dB]	Gain [dB]
CW	0.3 dB < AGC	799.6992	-62.1	27.6	33.0	5.4	89.7
CW	3 dB > AGC	799.6992	-58.8	27.9	33.0	5.1	86.7

Band 806 MHz – 809 MHz, uplink							
Emission Designator	Input Power	Frequency f_0 [MHz]	Input Power [dBm]	Maximum Average Output Power [dBm]	Limit Average Output Power [dBm]	Margin to Limit [dB]	Gain [dB]
CW	0.3 dB < AGC	808.2561	-62.1	26.5	60.0	33.5	88.6
CW	3 dB > AGC	808.2561	-58.8	26.7	60.0	33.3	85.5

Band 809 MHz – 817 MHz, uplink							
Emission Designator	Input Power	Frequency f_0 [MHz]	Input Power [dBm]	Maximum Average Output Power [dBm]	Limit Average Output Power [dBm]	Margin to Limit [dB]	Gain [dB]
CW	0.3 dB < AGC	816.0467	-62.1	27.3	60.0	32.7	89.4
CW	3 dB > AGC	816.0467	-58.8	26.6	60.0	33.4	85.4

Band 817 MHz – 824 MHz, uplink							
Emission Designator	Input Power	Frequency f_0 [MHz]	Input Power [dBm]	Maximum Average Output Power [dBm]	Limit Average Output Power [dBm]	Margin to Limit [dB]	Gain [dB]
CW	0.3 dB < AGC	823.9020	-61.5	27.0	60.0	33.0	88.5
CW	3 dB > AGC	823.9020	-58.2	27.4	60.0	32.6	85.6

Remark: Please see next sub-clause for the measurement plot.

Sample calculation for output power 2 W

The conducted output power of the DUT can be 33 dBm (2 W) in the band 758 – 768 MHz.

This output power of 2 W (conducted) can be transformed to maximum 5 W per channel ERP by using appropriate antenna equipment.


For example:

Feeder cable loss + antenna gain: 0 dBd


$33 \text{ dBm (2 W)} + (4 \text{ dBd}) = 37 \text{ dBm (5 W) ERP}$

4.1.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")


Frequency Band = 758 MHz – 768 MHz, Direction = RF downlink,
Input Power = 0.3 dB < AGC, CW at f_0

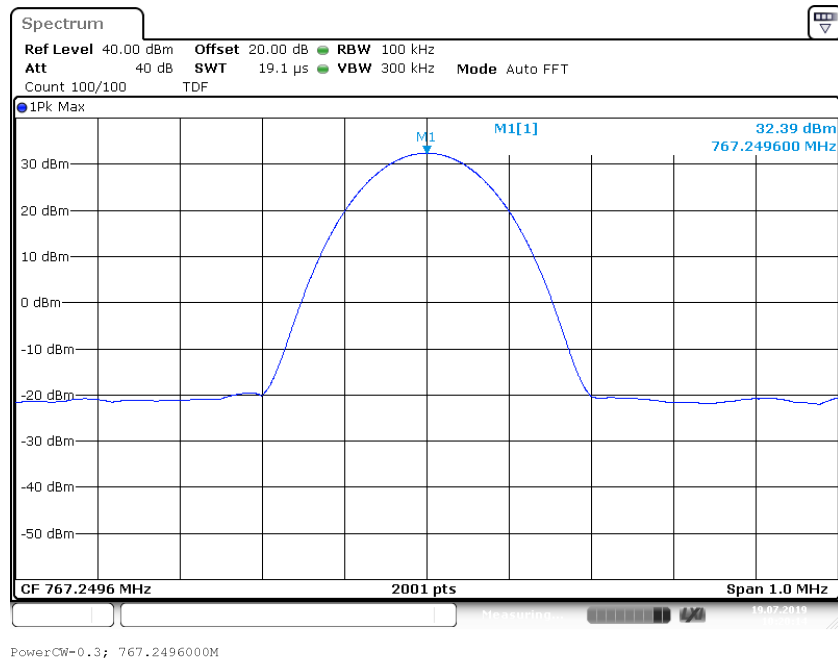


Frequency Band = 758 MHz – 768 MHz, Direction = RF downlink,
Input Power = 3 dB > AGC, CW at f_0

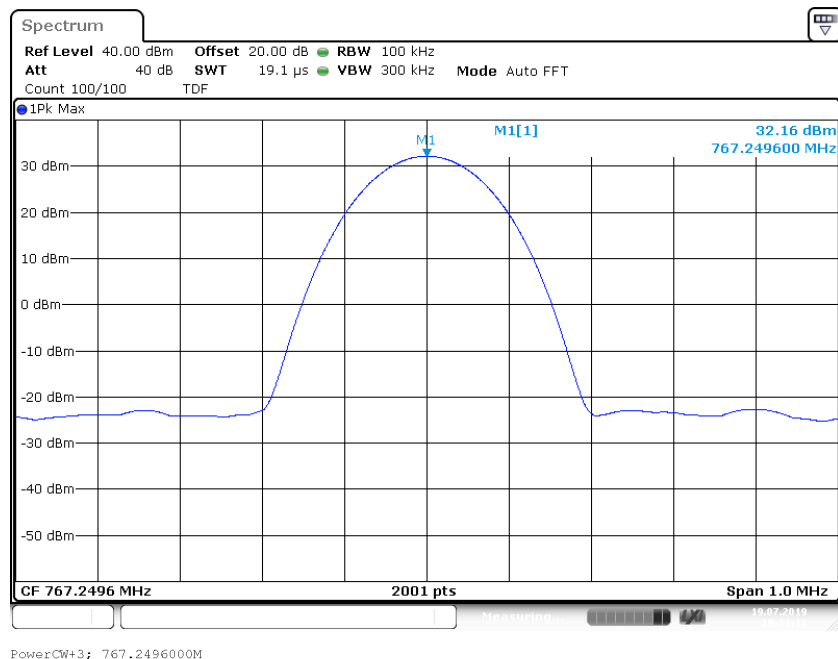


Frequency Band = 769 MHz – 775 MHz, Direction = RF downlink,
Input Power = 0.3 dB < AGC, CW at f_0

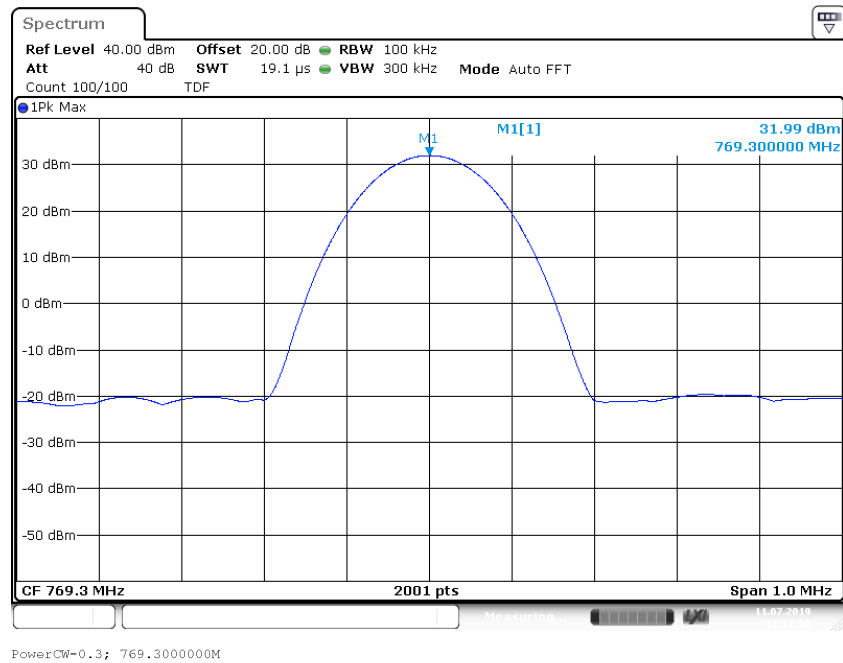


Frequency Band = 769 MHz – 775 MHz, Direction = RF downlink,
Input Power = 3 dB > AGC, CW at f_0

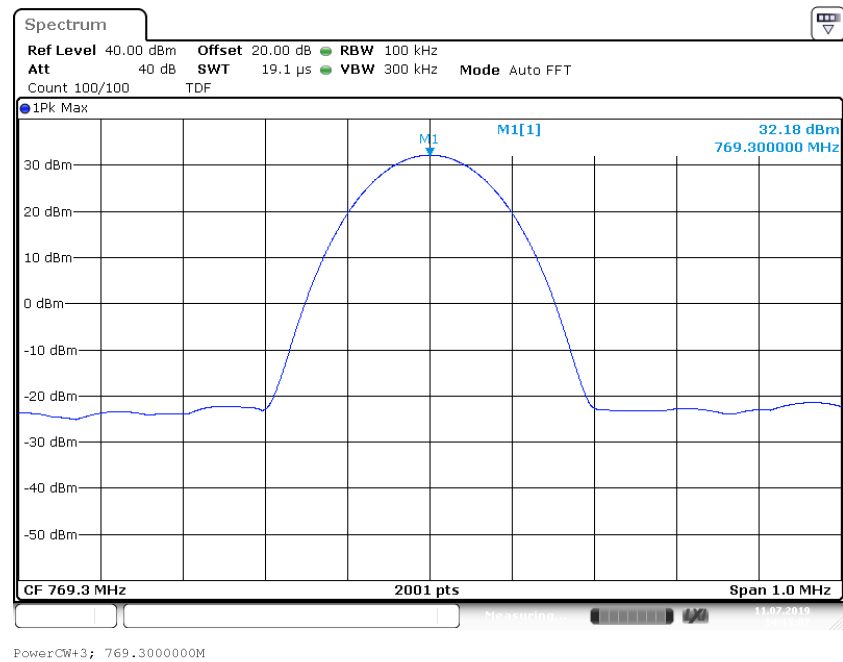


Frequency Band = 851 MHz – 854 MHz, Direction = RF downlink,
Input Power = 0.3 dB < AGC, CW at f_0

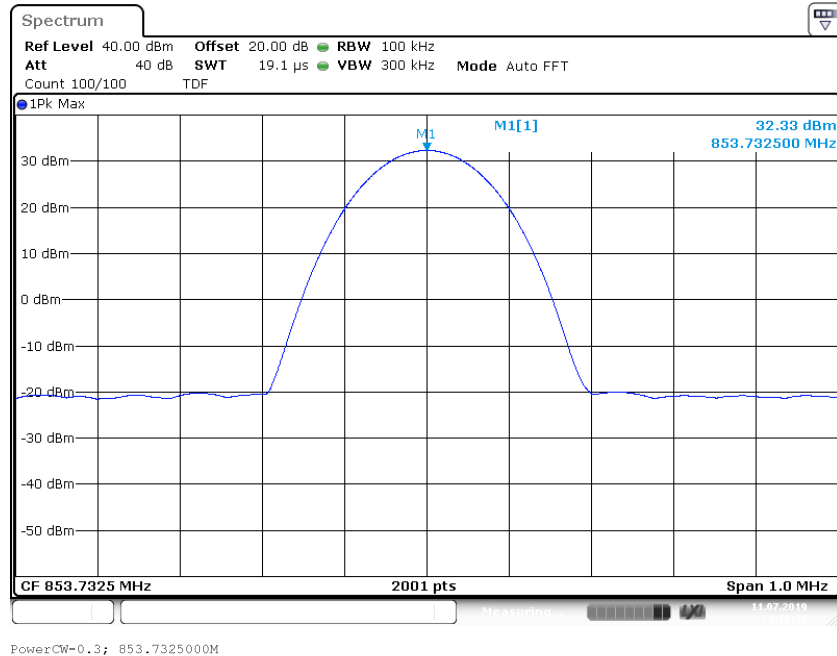


Frequency Band = 851 MHz – 854 MHz, Direction = RF downlink,
Input Power = 3 dB > AGC, CW at f_0

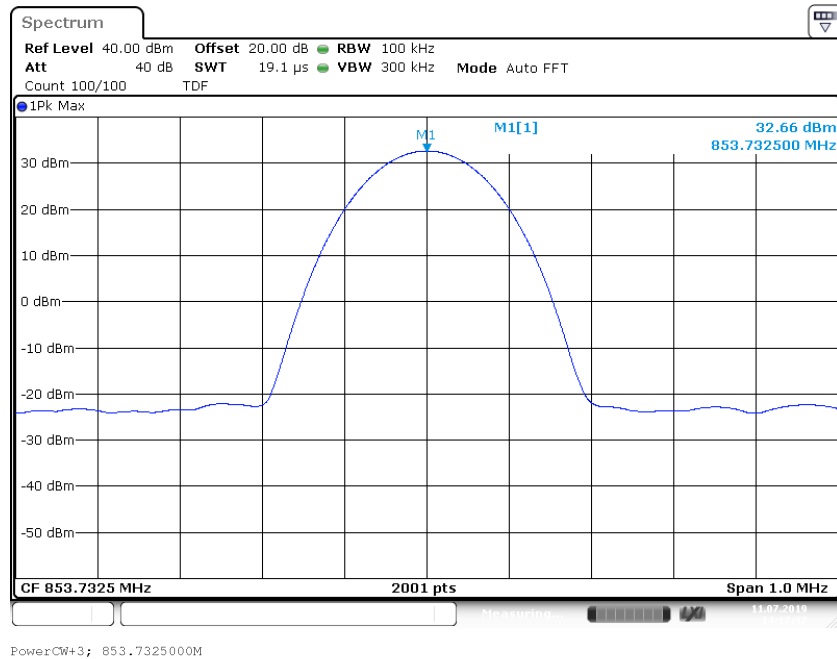


Frequency Band = 854 MHz – 862 MHz, Direction = RF downlink,
Input Power = 0.3 dB < AGC, CW at f_0

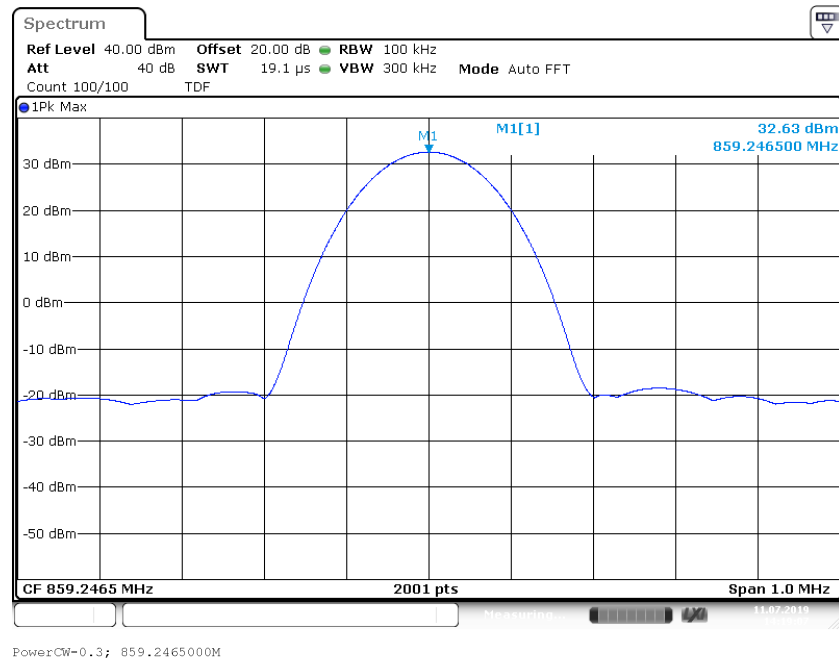


Frequency Band = 854 MHz – 862 MHz, Direction = RF downlink,
Input Power = 3 dB > AGC, CW at f_0

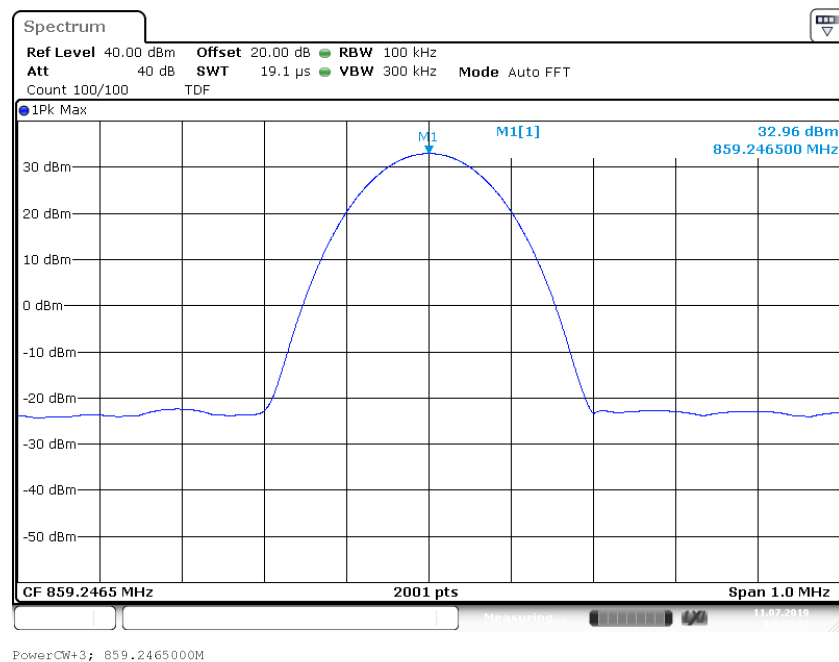


Frequency Band = 862 MHz – 869 MHz, Direction = RF downlink,
Input Power = 0.3 dB < AGC, CW at f_0

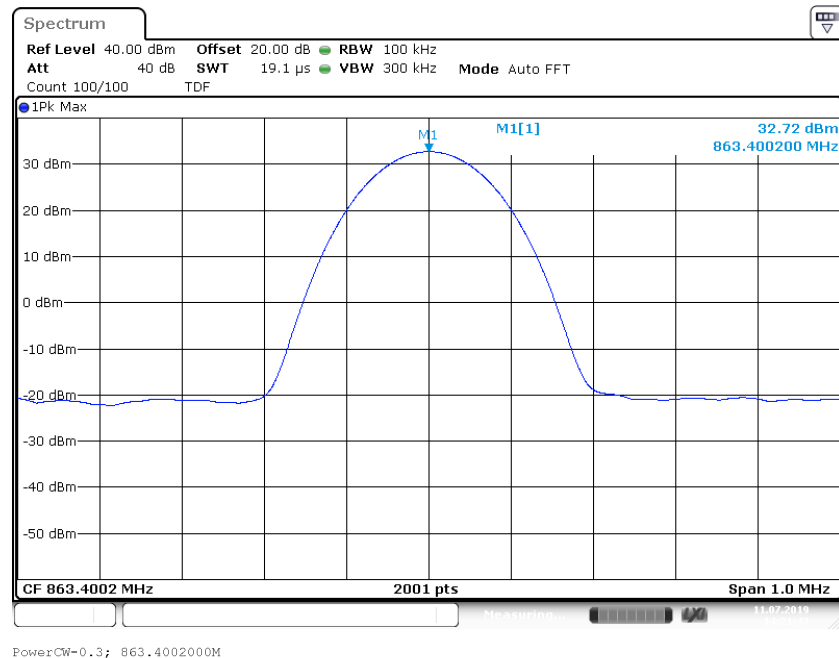

Frequency Band = 862 MHz – 869 MHz, Direction = RF downlink,
Input Power = 3 dB > AGC, CW at f_0

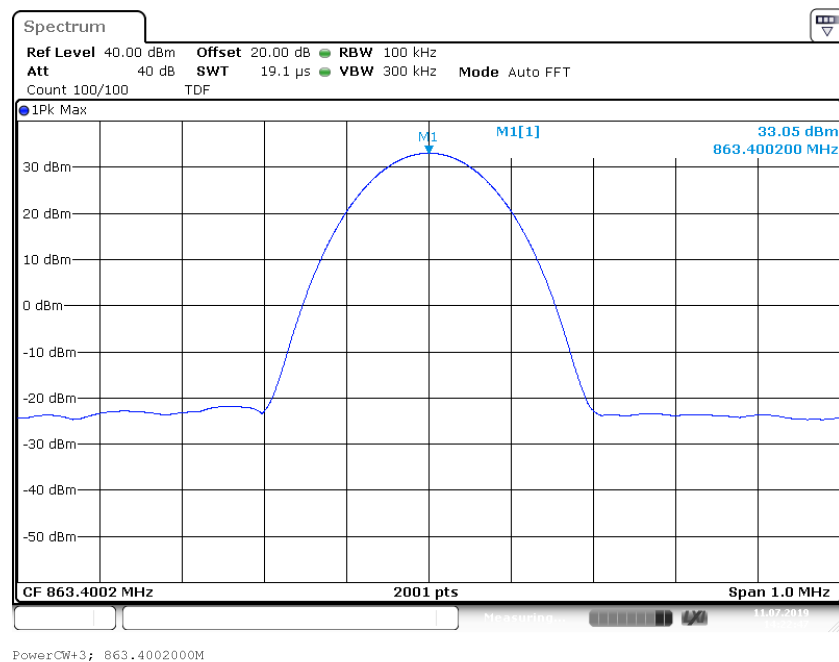


Frequency Band = 788 MHz – 798 MHz, Direction = RF uplink,
Input Power = 0.3 dB < AGC, CW at f_0

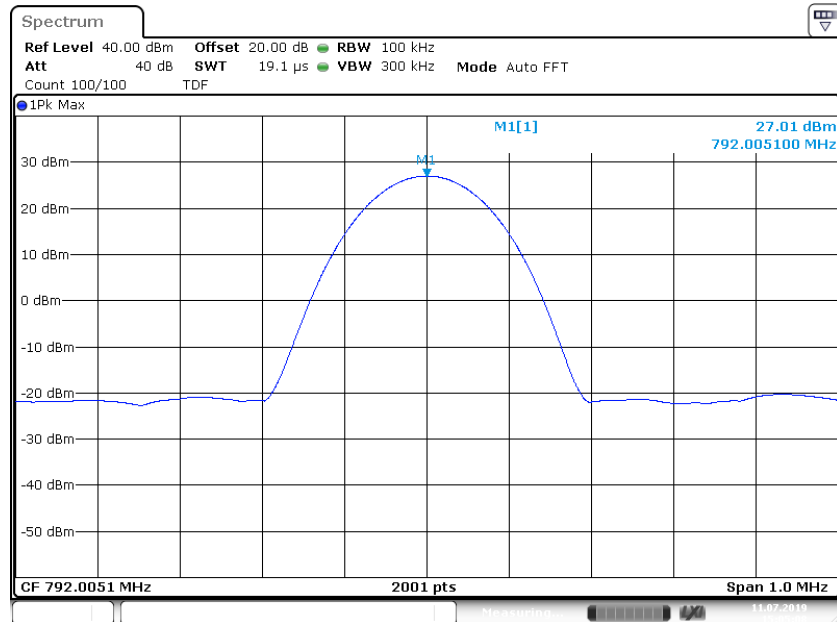


Power: CW=0.3; 792.0051000M

Frequency Band = 788 MHz – 798 MHz, Direction = RF uplink,
Input Power = 3 dB > AGC, CW at f_0

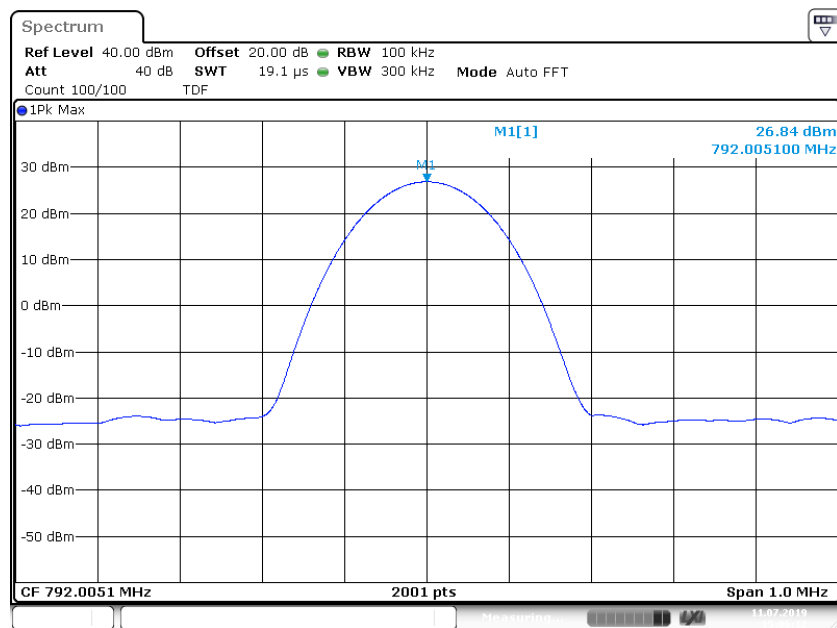


Power: CW=3; 792.0051000M


Frequency Band = 799 MHz – 805 MHz, Direction = RF uplink,
Input Power = 0.3 dB < AGC, CW at f_0

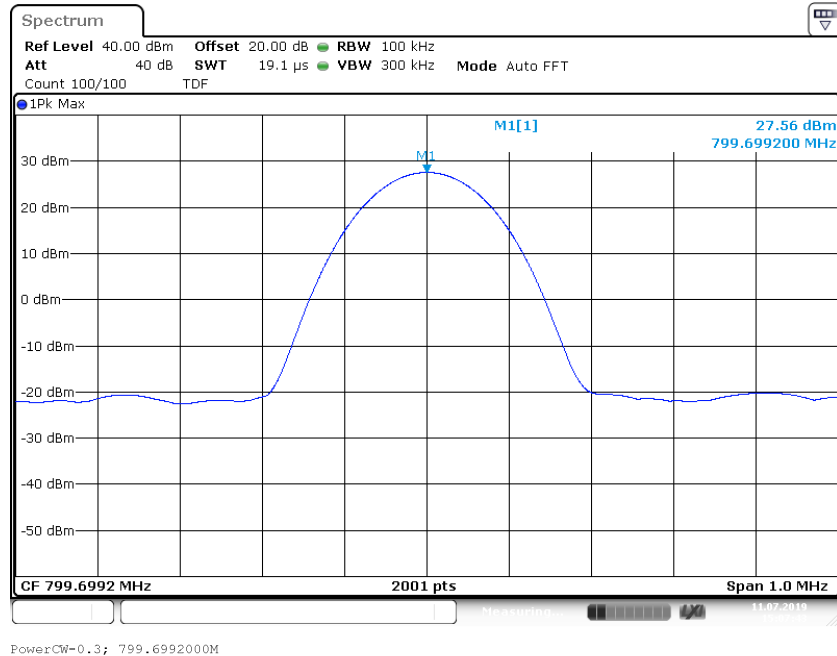

Frequency Band = 799 MHz – 805 MHz, Direction = RF uplink,
Input Power = 3 dB > AGC, CW at f_0

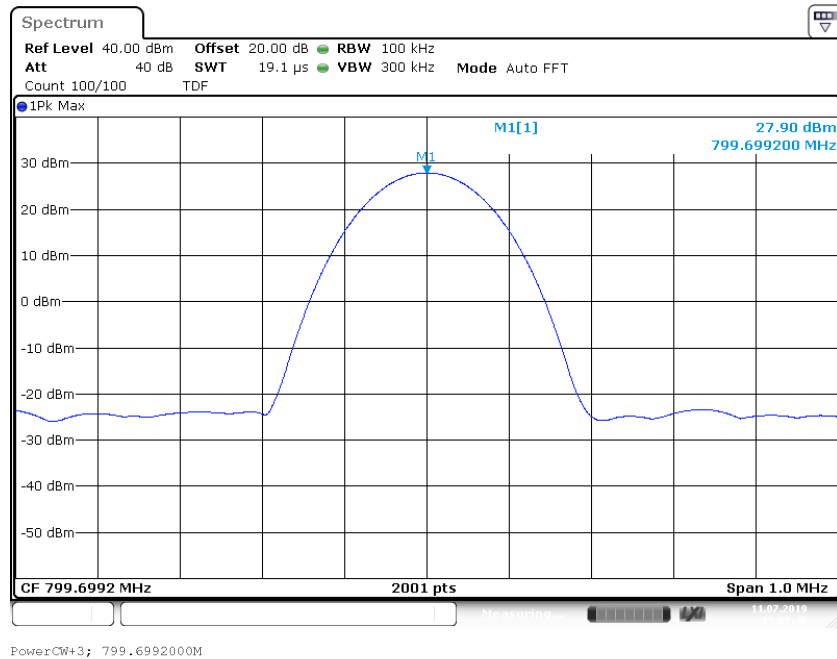


Frequency Band = 806 MHz – 809 MHz, Direction = RF uplink,
Input Power = 0.3 dB < AGC, CW at f_0

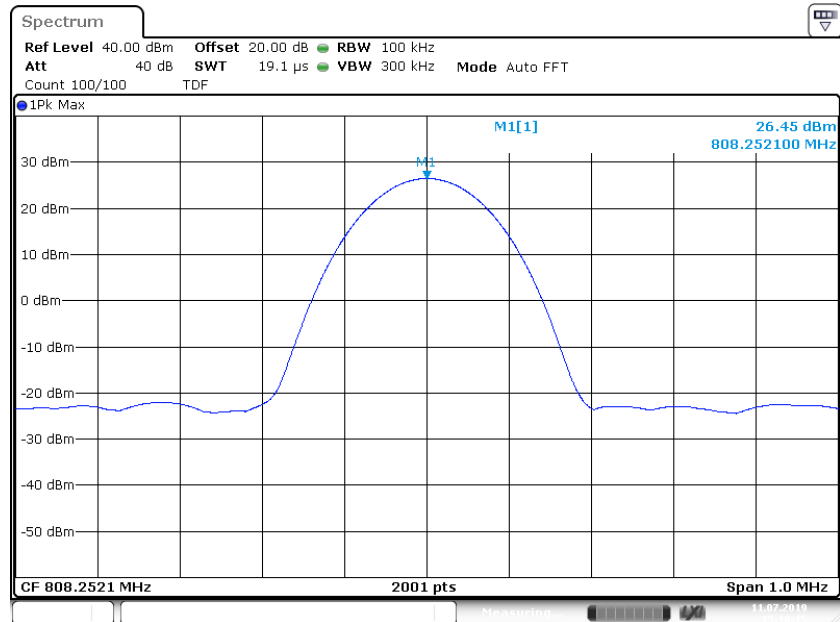


PowerCW=0.3; 808.2521000M

Frequency Band = 806 MHz – 809 MHz, Direction = RF uplink,
Input Power = 3 dB > AGC, CW at f_0

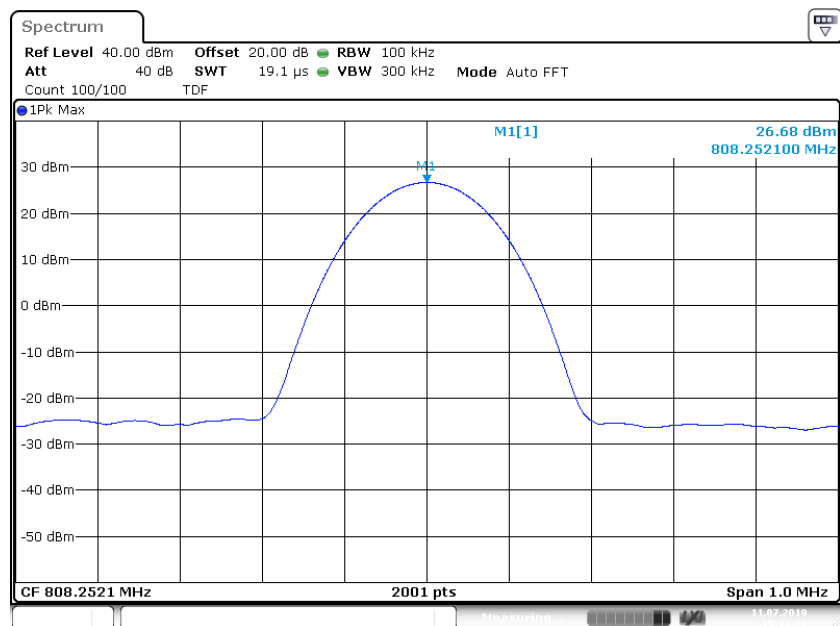


PowerCW=3; 808.2521000M

Frequency Band = 809 MHz – 817 MHz, Direction = RF uplink,
Input Power = 0.3 dB < AGC, CW at f_0

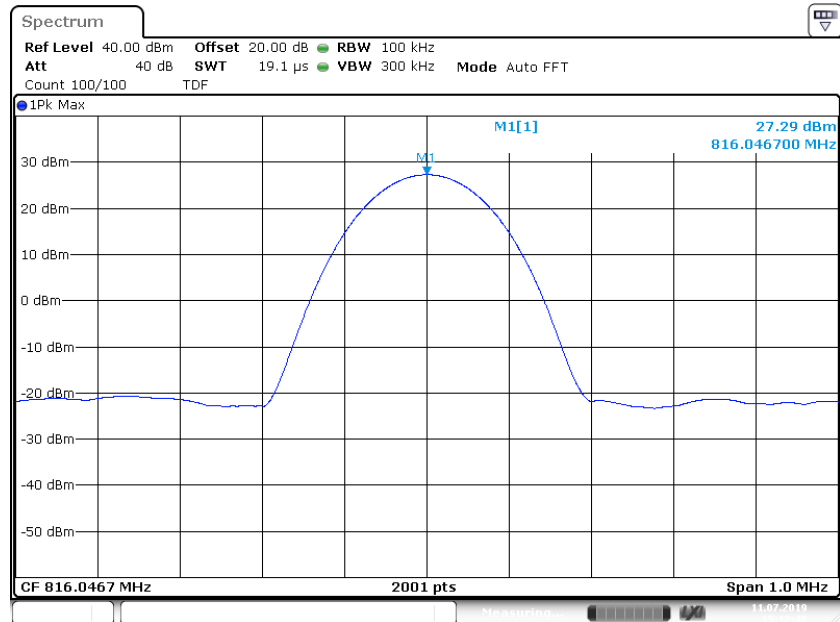


PowerCW=0.3; 816.0467000M

Frequency Band = 809 MHz – 817 MHz, Direction = RF uplink,
Input Power = 3 dB > AGC, CW at f_0

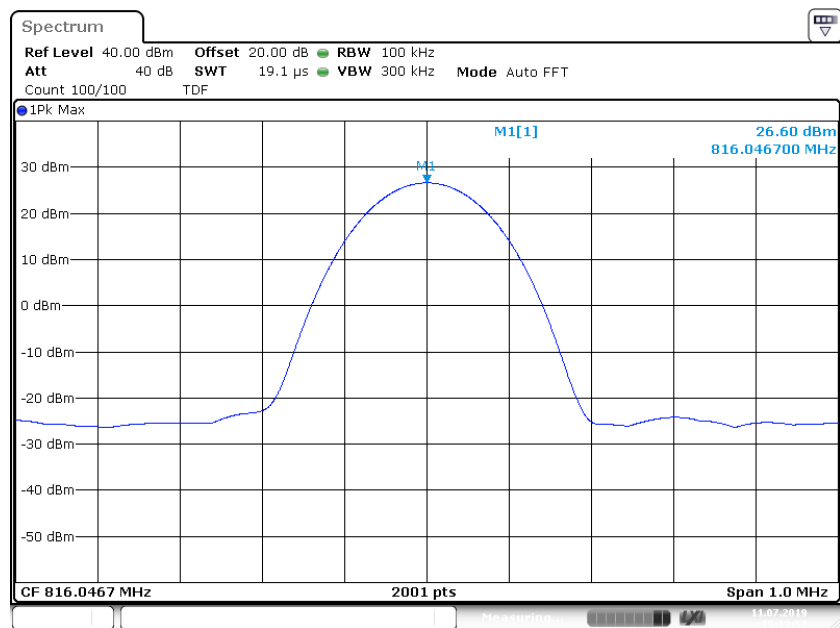


PowerCW=3; 816.0467000M

Input Power = 0.3 dB < AGC, CW at f_0



Input Power = 3 dB > AGC, CW at f_0



4.1.5 TEST EQUIPMENT USED

- FCC cond. Test Lab, BV Nbg

4.2 PEAK TO AVERAGE RATIO


Standard -

The test was performed according to:
ANSI C63.26

4.2.1 TEST DESCRIPTION

This test case is intended to demonstrate compliance to the signal booster power and gain limits and requirements for industrial signal boosters.

The EUT was connected to the test setup according to the following diagram:

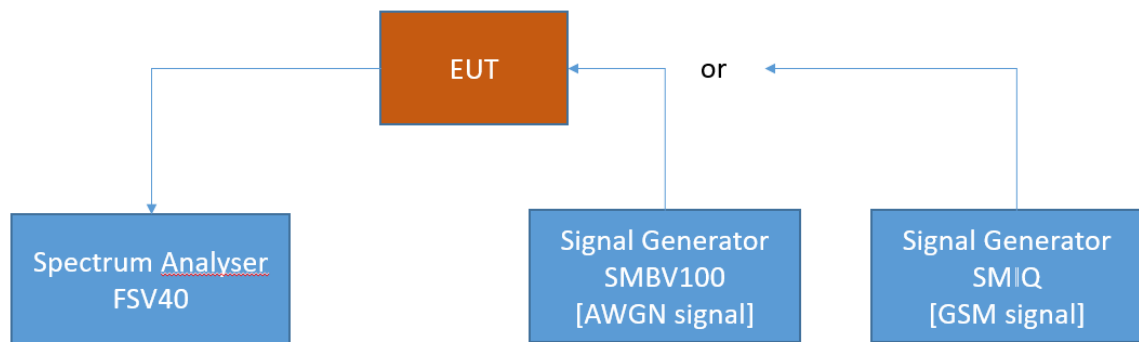

FCC Part 22/24/27/90 Industrial signal booster – Test Setup; RF Output Power / Gain

The attenuation of the measuring and stimulus path are known for each measured frequency and are considered.

The Spectrum Analyzer settings can be directly found in the measurement diagrams.

4.2.2 TEST REQUIREMENTS / LIMITS

There is no requirement for the Peak-to-Average value in the applicable rule parts.

4.2.3 TEST PROTOCOL

Band 758 MHz – 768 MHz, downlink						
Emission Designator	Input Power	Frequency [MHz]	Input Power [dBm]	PAPR [dB]	Limit PAPR [dB] *)	Margin to Limit [dB]
5M00G7D	0.3 dB < AGC	760.5000	-57.5	8.1	13.0	4.9
5M00G7D	3 dB > AGC	763.0000	-54.4	8.2	13.0	4.8

Band 769 MHz – 775 MHz, downlink						
Emission Designator	Input Power	Frequency [MHz]	Input Power [dBm]	PAPR [dB]	Limit PAPR [dB] *)	Margin to Limit [dB]
4K00F3E	0.3 dB < AGC	769.0125	-56.9	0.3	13.0	12.7
4K00F3E	3 dB > AGC	769.0125	-53.6	0.3	13.0	12.7
11K3F3E	0.3 dB < AGC	769.0125	-56.9	0.3	13.0	12.7
11K3F3E	3 dB > AGC	772.0000	-53.2	0.3	13.0	12.7
8K10F1D	0.3 dB < AGC	769.3000	-57.5	0.2	13.0	12.8
8K10F1D	3 dB > AGC	774.9875	-53.0	0.2	13.0	12.8
9K80D7W	0.3 dB < AGC	772.0000	-56.5	2.4	13.0	10.6
9K80D7W	3 dB > AGC	769.0125	-53.6	2.4	13.0	10.6
16K0F3E	0.3 dB < AGC	772.0000	-56.5	0.4	13.0	12.6
16K0F3E	3 dB > AGC	774.9875	-53.0	0.4	13.0	12.6

Band 851 MHz – 854 MHz, downlink						
Emission Designator	Input Power	Frequency [MHz]	Input Power [dBm]	PAPR [dB]	Limit PAPR [dB] *)	Margin to Limit [dB]
4K00F3E	0.3 dB < AGC	851.0125	-55.5	0.3	13.0	12.7
4K00F3E	3 dB > AGC	852.5000	-53.0	0.2	13.0	12.8
11K3F3E	0.3 dB < AGC	851.0125	-55.5	0.3	13.0	12.7
11K3F3E	3 dB > AGC	852.5000	-53.0	0.2	13.0	12.8
8K10F1D	0.3 dB < AGC	851.0125	-55.5	0.2	13.0	12.8
8K10F1D	3 dB > AGC	851.0125	-52.2	0.2	13.0	12.8
9K80D7W	0.3 dB < AGC	852.5000	-56.3	2.4	13.0	10.6
9K80D7W	3 dB > AGC	852.5000	-53.0	2.4	13.0	10.6

Band 854 MHz – 862 MHz, downlink						
Emission Designator	Input Power	Frequency [MHz]	Input Power [dBm]	PAPR [dB]	Limit PAPR [dB] *)	Margin to Limit [dB]
4K00F3E	0.3 dB < AGC	858.0000	-56.1	0.3	13.0	12.7
4K00F3E	3 dB > AGC	854.0125	-53.2	0.3	13.0	12.7
11K3F3E	0.3 dB < AGC	859.2465	-56.5	0.3	13.0	12.7
11K3F3E	3 dB > AGC	858.0000	-52.8	0.3	13.0	12.7
8K10F1D	0.3 dB < AGC	858.0000	-56.1	0.2	13.0	12.8
8K10F1D	3 dB > AGC	858.0000	-52.8	0.2	13.0	12.8
9K80D7W	0.3 dB < AGC	858.0000	-56.1	2.4	13.0	10.6
9K80D7W	3 dB > AGC	859.2465	-53.2	2.4	13.0	10.6

Band 862 MHz – 869 MHz, downlink						
Emission Designator	Input Power	Frequency [MHz]	Input Power [dBm]	PAPR [dB]	Limit PAPR [dB] *)	Margin to Limit [dB]
4K00F3E	0.3 dB < AGC	865.5000	-56.1	0.3	13.0	12.7
4K00F3E	3 dB > AGC	868.9875	-52.2	0.3	13.0	12.7
11K3F3E	0.3 dB < AGC	865.5000	-56.1	0.3	13.0	12.7
11K3F3E	3 dB > AGC	868.9875	-52.2	0.3	13.0	12.7
8K10F1D	0.3 dB < AGC	868.9875	-55.5	0.2	13.0	12.8
8K10F1D	3 dB > AGC	863.4002	-53.2	0.2	13.0	12.8
9K80D7W	0.3 dB < AGC	863.4002	-56.5	2.4	13.0	10.6
9K80D7W	3 dB > AGC	863.4002	-53.2	2.4	13.0	10.6
16K0F3E	0.3 dB < AGC	863.4002	-56.5	0.4	13.0	12.6
16K0F3E	3 dB > AGC	868.9875	-52.2	0.4	13.0	12.6

Band 788 MHz – 798 MHz, uplink						
Emission Designator	Input Power	Frequency [MHz]	Input Power [dBm]	PAPR [dB]	Limit PAPR [dB] *)	Margin to Limit [dB]
5M00G7D	0.3 dB < AGC	795.5000	-60.5	8.7	13.0	4.3
5M00G7D	3 dB > AGC	792.0051	-57.8	8.7	13.0	4.3

Band 799 MHz – 805 MHz, uplink						
Emission Designator	Input Power	Frequency [MHz]	Input Power [dBm]	PAPR [dB]	Limit PAPR [dB] *)	Margin to Limit [dB]
4K00F3E	0.3 dB < AGC	804.9875	-60.7	0.3	13.0	12.7
4K00F3E	3 dB > AGC	804.9875	-57.4	0.3	13.0	12.7
11K3F3E	0.3 dB < AGC	799.0125	-62.1	0.3	13.0	12.7
11K3F3E	3 dB > AGC	802.0000	-57.8	0.3	13.0	12.7
8K10F1D	0.3 dB < AGC	804.9875	-60.7	0.2	13.0	12.8
8K10F1D	3 dB > AGC	802.0000	-57.8	0.2	13.0	12.8
9K80D7W	0.3 dB < AGC	802.0000	-61.1	2.4	13.0	10.6
9K80D7W	3 dB > AGC	802.0000	-57.8	2.4	13.0	10.6
16K0F3E	0.3 dB < AGC	802.0000	-61.1	0.4	13.0	12.6
16K0F3E	3 dB > AGC	799.0125	-58.8	0.4	13.0	12.6

Band 806 MHz – 809 MHz, uplink						
Emission Designator	Input Power	Frequency [MHz]	Input Power [dBm]	PAPR [dB]	Limit PAPR [dB] *)	Margin to Limit [dB]
4K00F3E	0.3 dB < AGC	808.2521	-62.1	0.3	13.0	12.7
4K00F3E	3 dB > AGC	807.5000	-58.4	0.7	13.0	12.3
11K3F3E	0.3 dB < AGC	806.0125	-61.3	0.3	13.0	12.7
11K3F3E	3 dB > AGC	807.5000	-58.4	0.7	13.0	12.3
8K10F1D	0.3 dB < AGC	808.9875	-61.7	0.2	13.0	12.8
8K10F1D	3 dB > AGC	807.5000	-58.4	0.6	13.0	12.4
9K80D7W	0.3 dB < AGC	808.9875	-61.7	2.6	13.0	10.4
9K80D7W	3 dB > AGC	806.0125	-58.0	3.0	13.0	10.0


Band 809 MHz – 817 MHz, uplink						
Emission Designator	Input Power	Frequency [MHz]	Input Power [dBm]	PAPR [dB]	Limit PAPR [dB] *)	Margin to Limit [dB]
4K00F3E	0.3 dB < AGC	809.0125	-61.9	0.3	13.0	12.7
4K00F3E	3 dB > AGC	813.0000	-58.2	0.7	13.0	12.3
11K3F3E	0.3 dB < AGC	809.0125	-61.9	0.3	13.0	12.7
11K3F3E	3 dB > AGC	813.0000	-58.2	0.7	13.0	12.3
8K10F1D	0.3 dB < AGC	809.0125	-61.9	0.2	13.0	12.8
8K10F1D	3 dB > AGC	813.0000	-58.2	0.6	13.0	12.4
9K80D7W	0.3 dB < AGC	813.0000	-61.5	2.5	13.0	10.5
9K80D7W	3 dB > AGC	809.0125	-58.6	2.7	13.0	10.3

Band 817 MHz – 824 MHz, uplink						
Emission Designator	Input Power	Frequency [MHz]	Input Power [dBm]	PAPR [dB]	Limit PAPR [dB] *)	Margin to Limit [dB]
4K00F3E	0.3 dB < AGC	817.0125	-61.7	0.2	13.0	12.8
4K00F3E	3 dB > AGC	817.0125	-58.4	0.3	13.0	12.7
11K3F3E	0.3 dB < AGC	820.5000	-61.1	0.3	13.0	12.7
11K3F3E	3 dB > AGC	817.0125	-58.4	0.3	13.0	12.7
8K10F1D	0.3 dB < AGC	823.9020	-61.5	0.2	13.0	12.8
8K10F1D	3 dB > AGC	817.0125	-58.4	0.2	13.0	12.8
9K80D7W	0.3 dB < AGC	817.0125	-61.7	2.4	13.0	10.6
9K80D7W	3 dB > AGC	820.5000	-57.8	2.7	13.0	10.3
16K0F3E	0.3 dB < AGC	817.0125	-61.7	0.3	13.0	12.7
16K0F3E	3 dB > AGC	817.0125	-58.4	0.3	13.0	12.7


Remark: *) Limit only for comparison purposes, no Part 90 requirement
Please see next sub-clause for the measurement plot.

4.2.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")


Frequency Band = 758 MHz – 768 MHz, Direction = RF downlink,
Input Power = 0.3 dB < AGC, Emission Designator = 5M00G7D

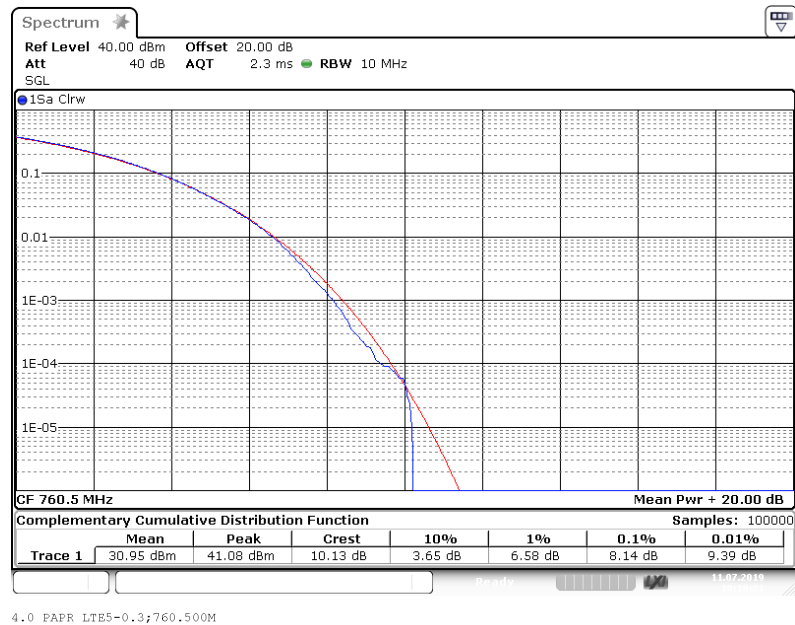


Frequency Band = 758 MHz – 768 MHz, Direction = RF downlink,
Input Power = 3 dB > AGC Emission Designator = 5M00G7D

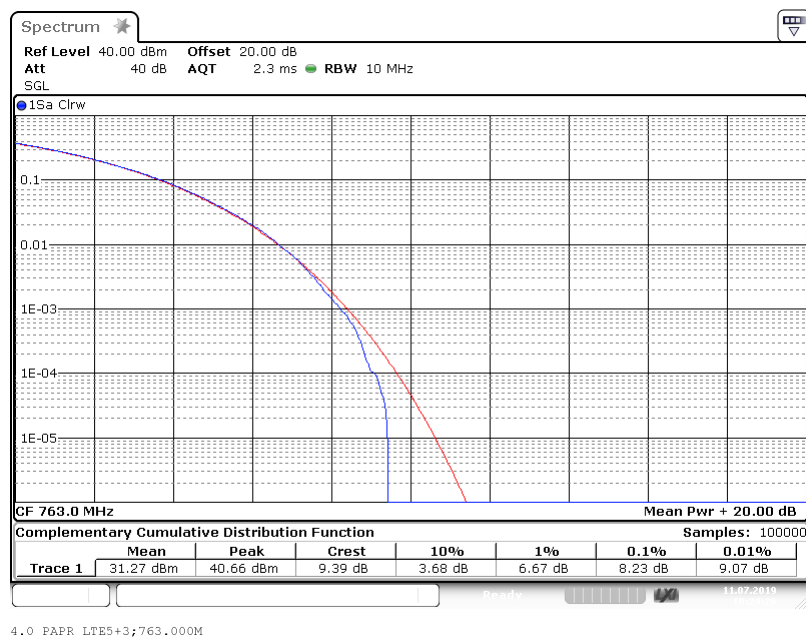


Frequency Band = 769 MHz – 775 MHz, Direction = RF downlink,
Input Power = 0.3 dB < AGC, Emission Designator = 4K00F3E

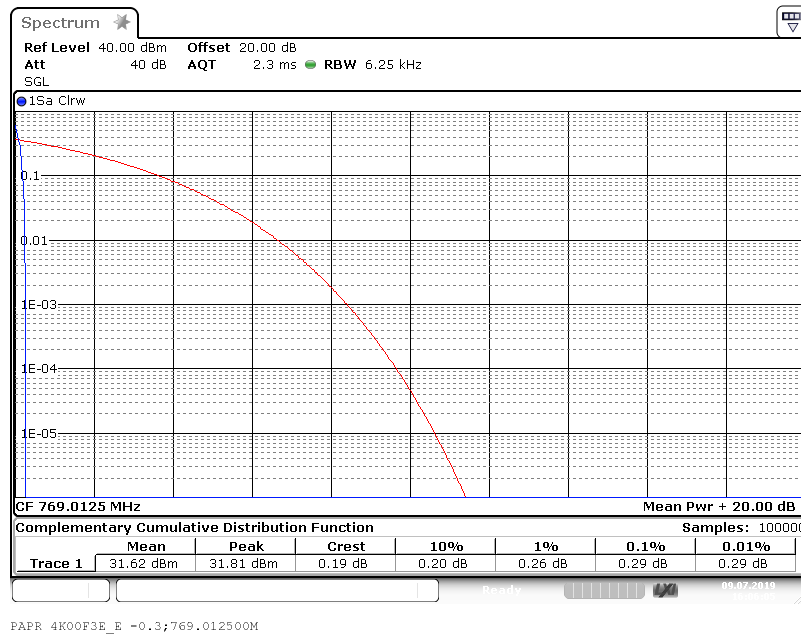


Frequency Band = 769 MHz – 775 MHz, Direction = RF downlink,
Input Power = 3 dB > AGC Emission Designator = 4K00F3E

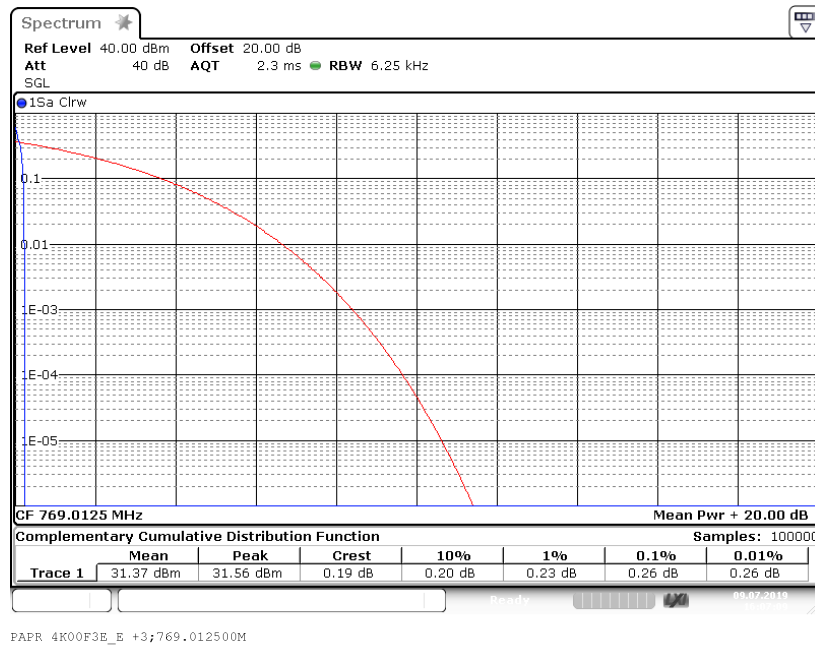


Frequency Band = 769 MHz – 775 MHz, Direction = RF downlink,
Input Power = 0.3 dB < AGC, Emission Designator = 11K3F3E

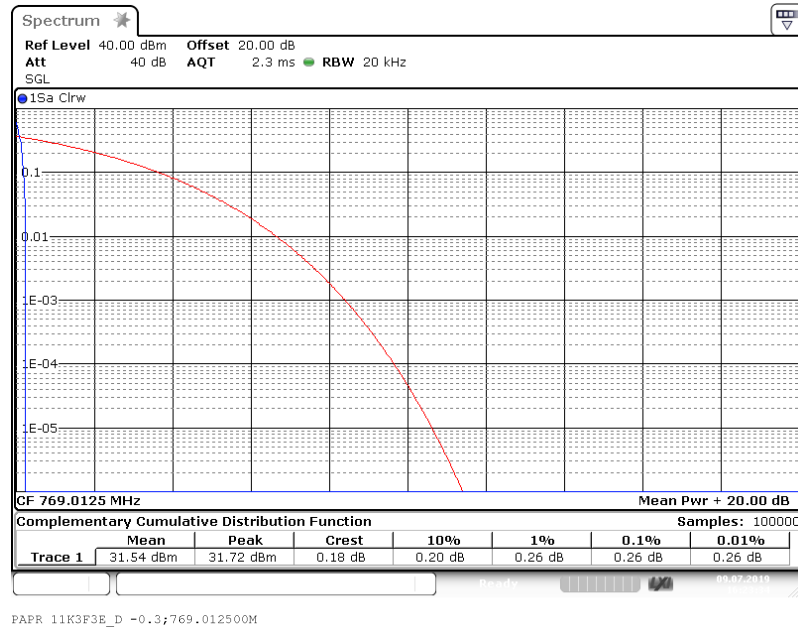


Frequency Band = 769 MHz – 775 MHz, Direction = RF downlink,
Input Power = 3 dB > AGC Emission Designator = 11K3F3E

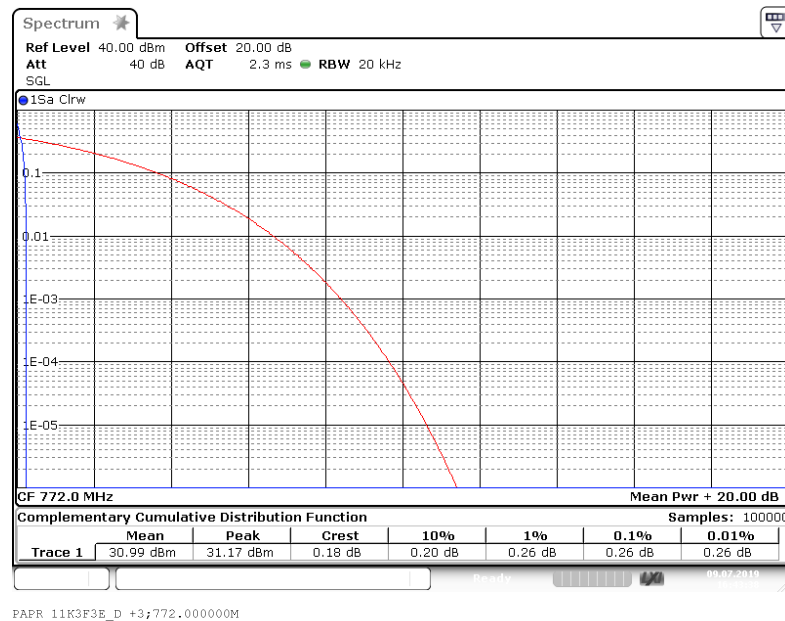


Frequency Band = 769 MHz – 775 MHz, Direction = RF downlink,
Input Power = 0.3 dB < AGC, Emission Designator = 8K10F1D

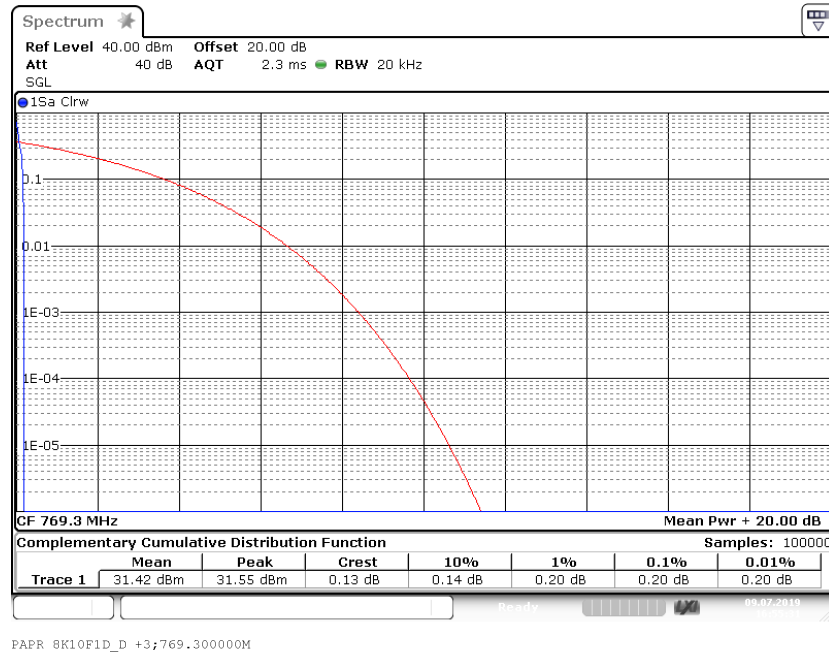


Frequency Band = 769 MHz – 775 MHz, Direction = RF downlink,
Input Power = 3 dB > AGC Emission Designator = 8K10F1D

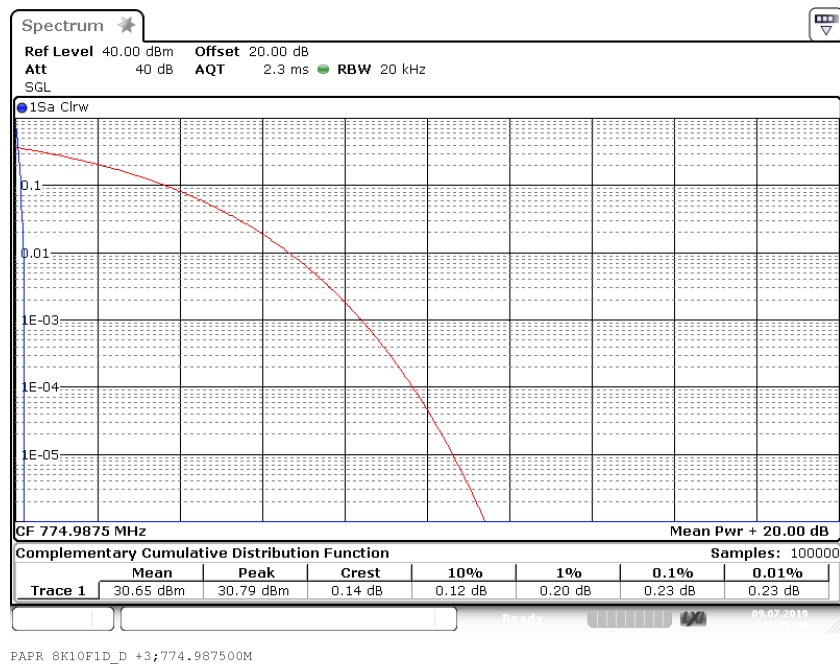


Frequency Band = 769 MHz – 775 MHz, Direction = RF downlink,
Input Power = 0.3 dB < AGC, Emission Designator = 9K80D7W

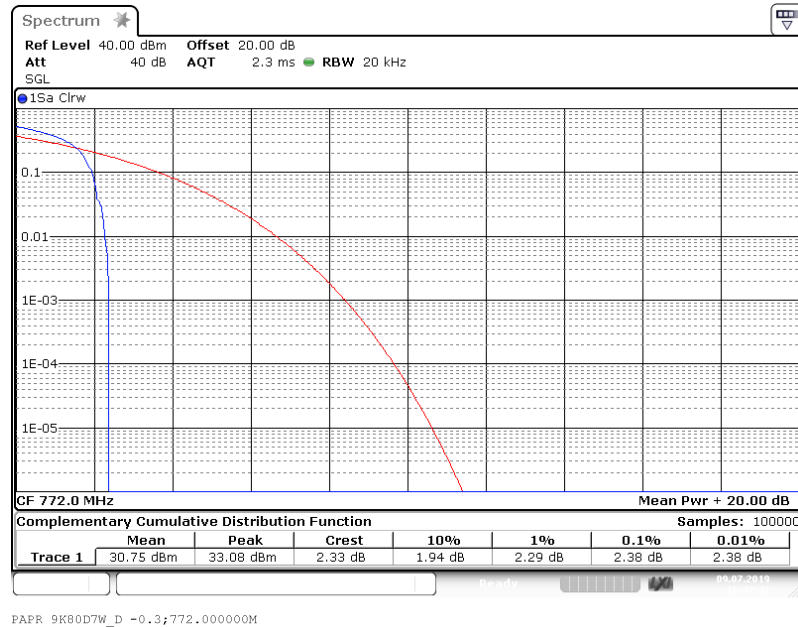


Frequency Band = 769 MHz – 775 MHz, Direction = RF downlink,
Input Power = 3 dB > AGC Emission Designator = 9K80D7W

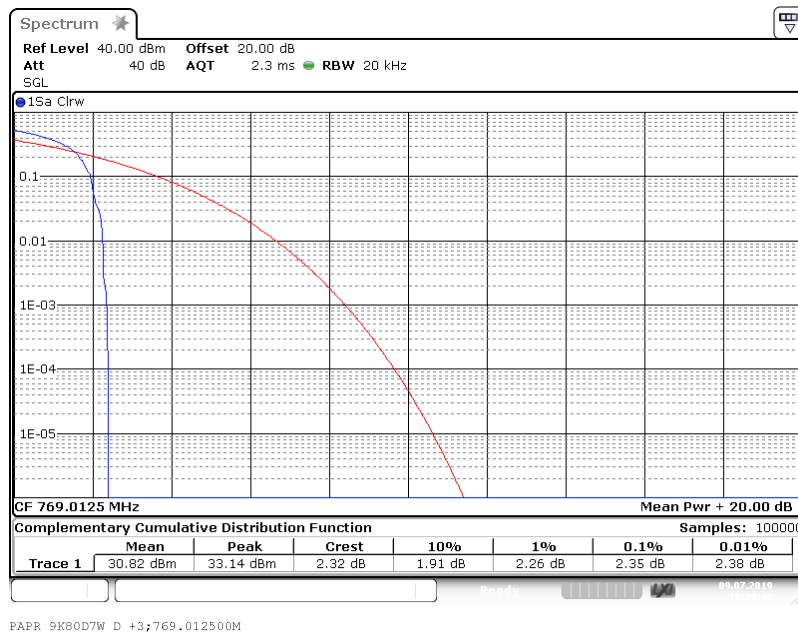


Frequency Band = 769 MHz – 775 MHz, Direction = RF downlink,
Input Power = 0.3 dB < AGC, Emission Designator = 16K0F3E

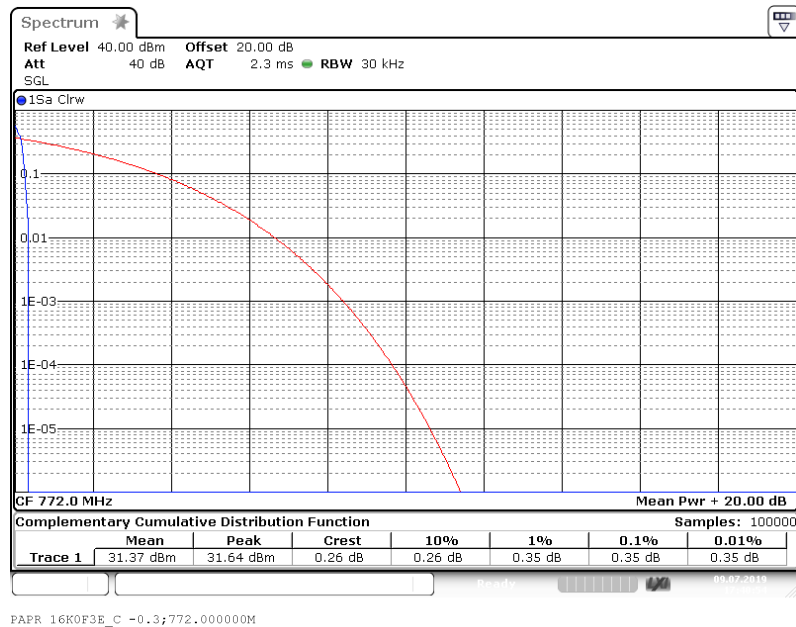

Frequency Band = 769 MHz – 775 MHz, Direction = RF downlink,
Input Power = 3 dB > AGC Emission Designator = 16K0F3E

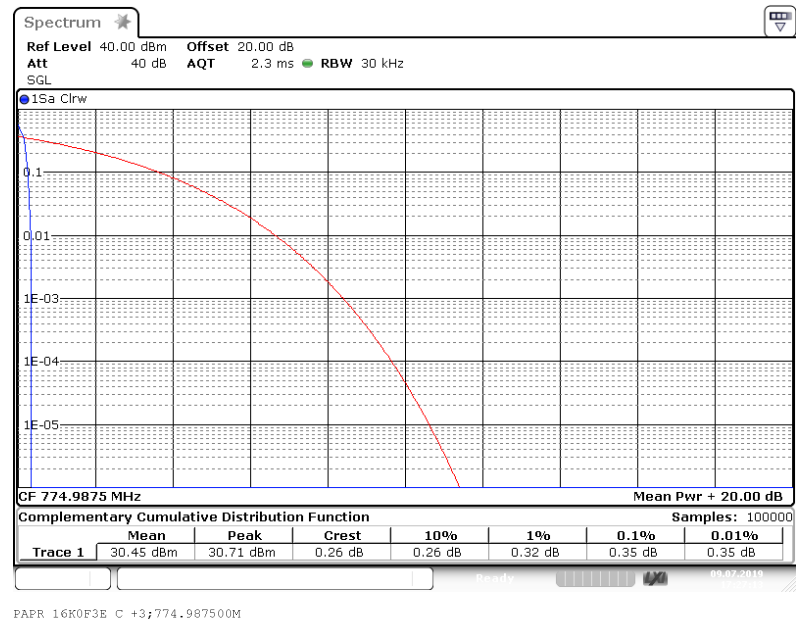


Frequency Band = 851 MHz – 854 MHz, Direction = RF downlink,
Input Power = 0.3 dB < AGC, Emission Designator = 4K00F3E

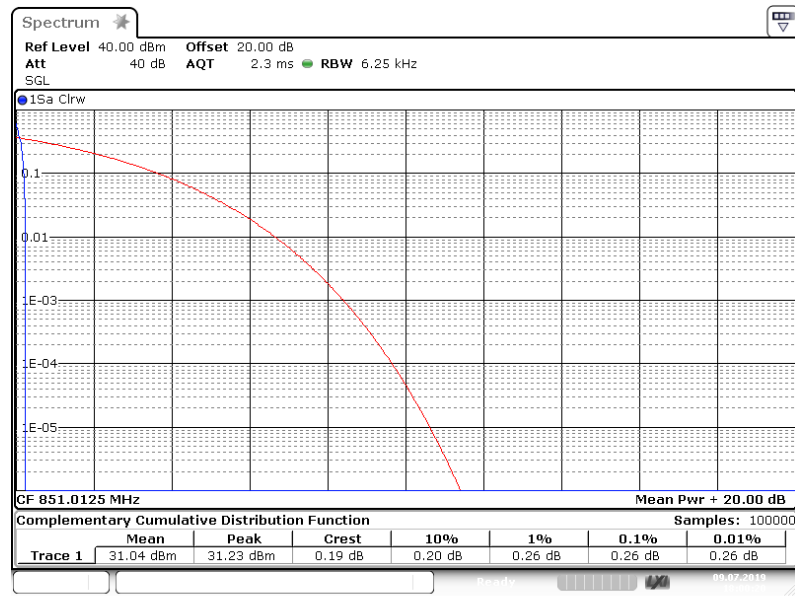


PAPR 4K00F3E_H -0.3;851.012500M

Frequency Band = 851 MHz – 854 MHz, Direction = RF downlink,
Input Power = 3 dB > AGC Emission Designator = 4K00F3E

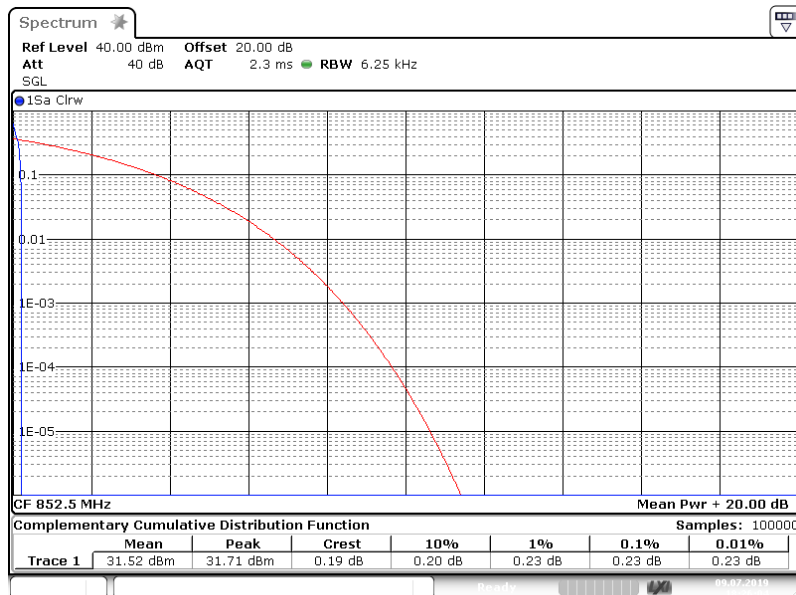


PAPR 4K00F3E_H +3;852.500000M


Frequency Band = 851 MHz – 854 MHz, Direction = RF downlink,
Input Power = 0.3 dB < AGC, Emission Designator = 11K3F3E

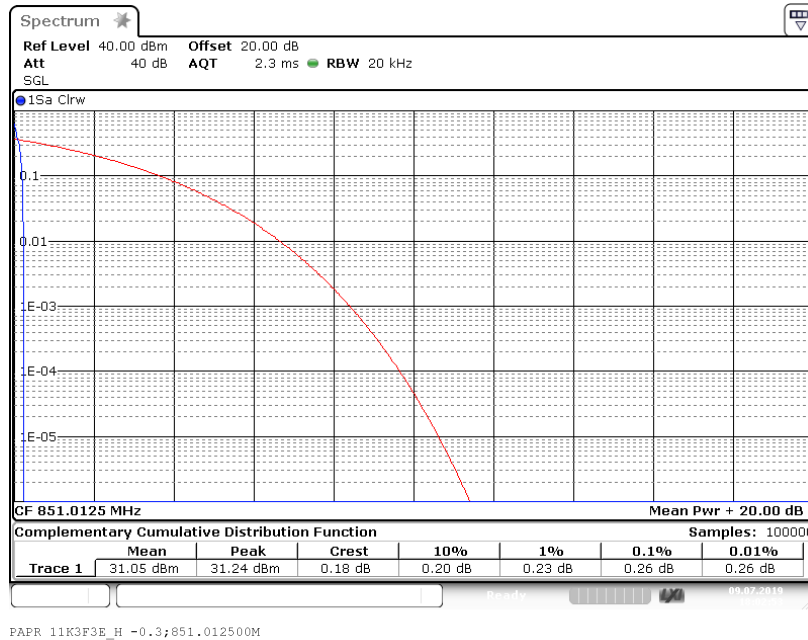


Frequency Band = 851 MHz – 854 MHz, Direction = RF downlink,
Input Power = 3 dB > AGC Emission Designator = 11K3F3E

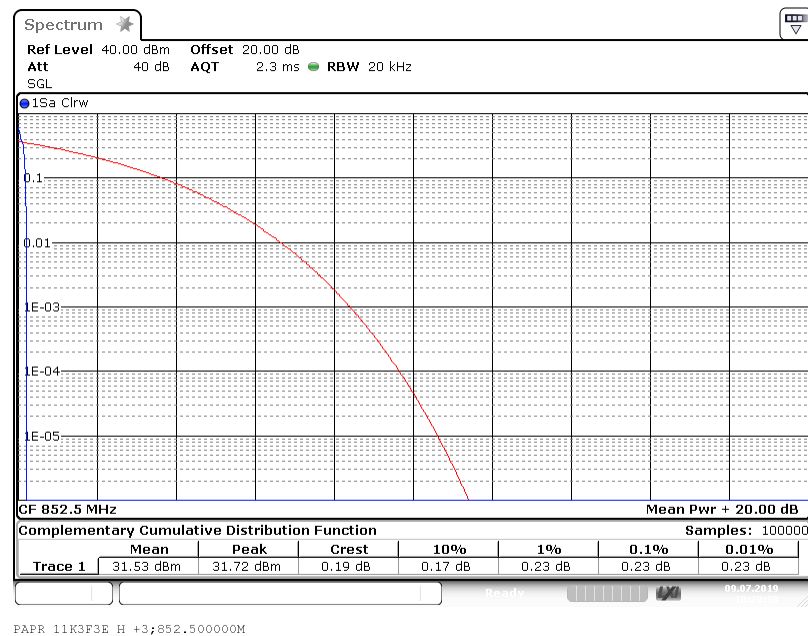


Frequency Band = 851 MHz – 854 MHz, Direction = RF downlink,
Input Power = 0.3 dB < AGC, Emission Designator = 8K10F1D

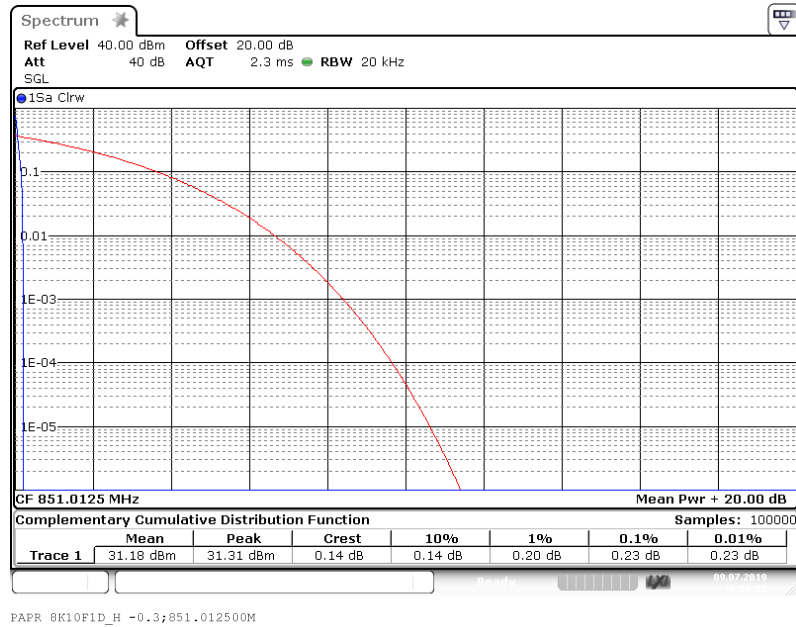


Frequency Band = 851 MHz – 854 MHz, Direction = RF downlink,
Input Power = 3 dB > AGC Emission Designator = 8K10F1D

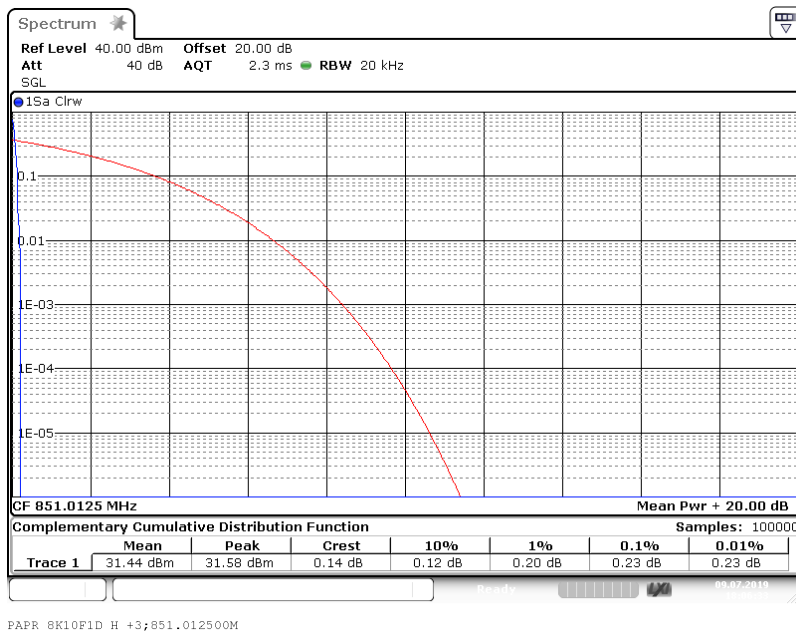


Frequency Band = 851 MHz – 854 MHz, Direction = RF downlink,
Input Power = 0.3 dB < AGC, Emission Designator = 9K80D7W

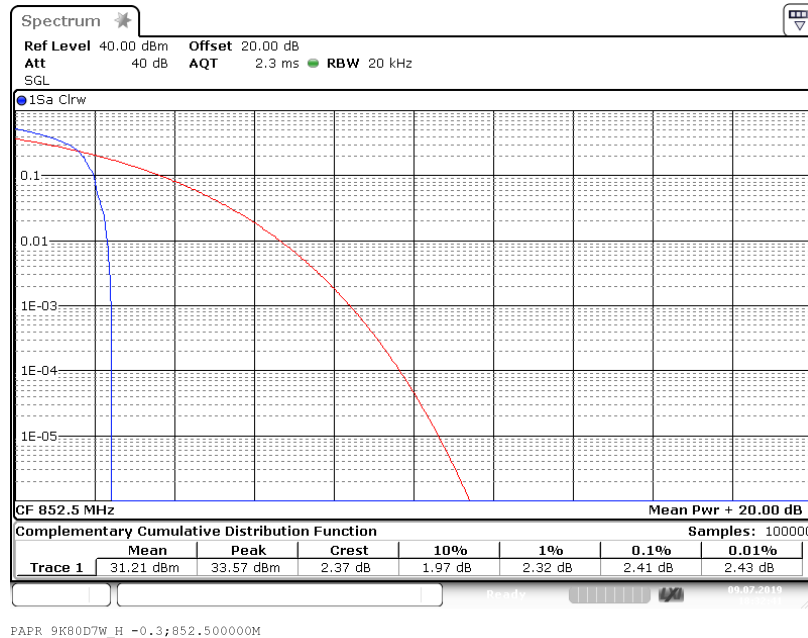

Frequency Band = 851 MHz – 854 MHz, Direction = RF downlink,
Input Power = 3 dB > AGC Emission Designator = 9K80D7W

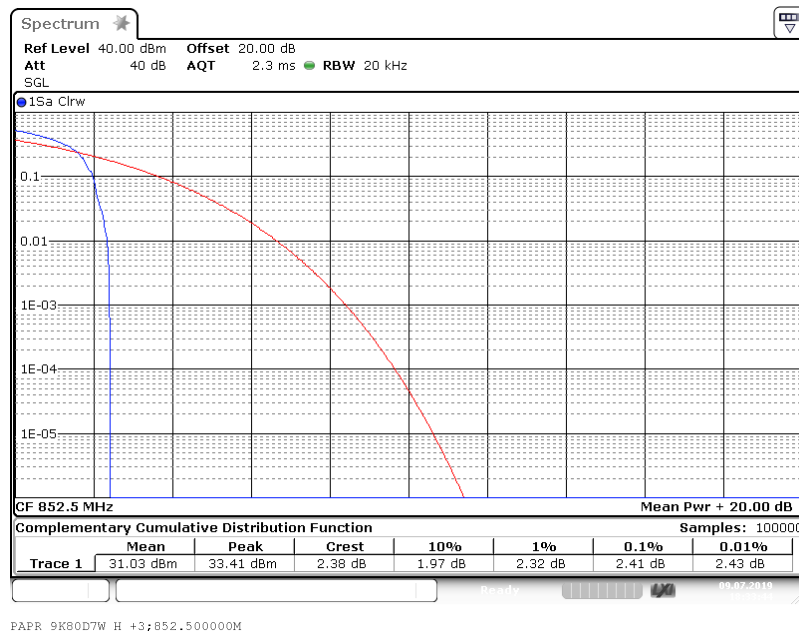


Frequency Band = 854 MHz – 862 MHz, Direction = RF downlink,
Input Power = 0.3 dB < AGC, Emission Designator = 4K00F3E

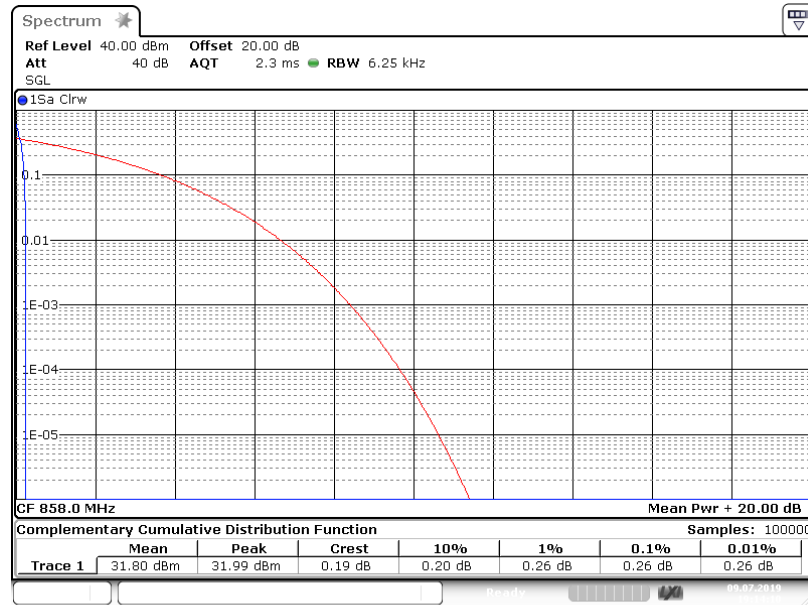


PAPR 4K00F3E_D -0.3;858.000000M

Frequency Band = 854 MHz – 862 MHz, Direction = RF downlink,
Input Power = 3 dB > AGC Emission Designator = 4K00F3E

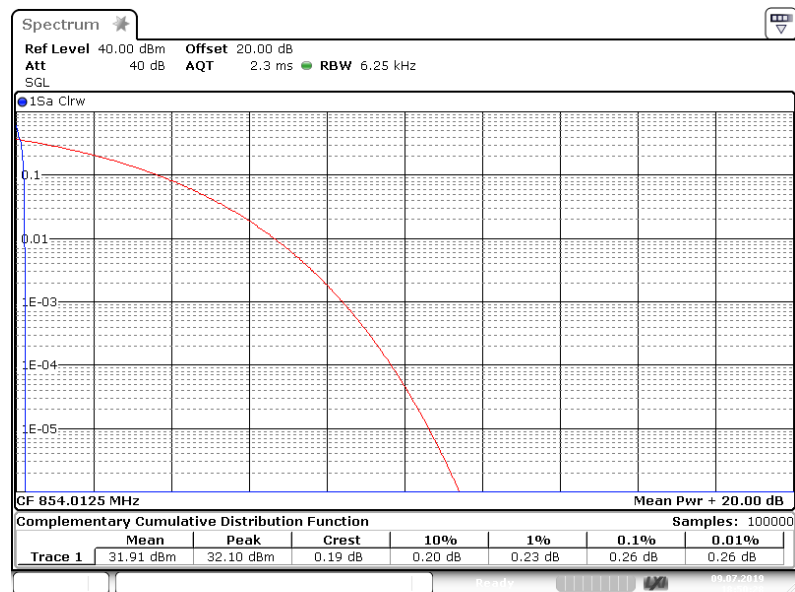


PAPR 4K00F3E_D +3;854.012500M


Frequency Band = 854 MHz – 862 MHz, Direction = RF downlink,
Input Power = 0.3 dB < AGC, Emission Designator = 11K3F3E

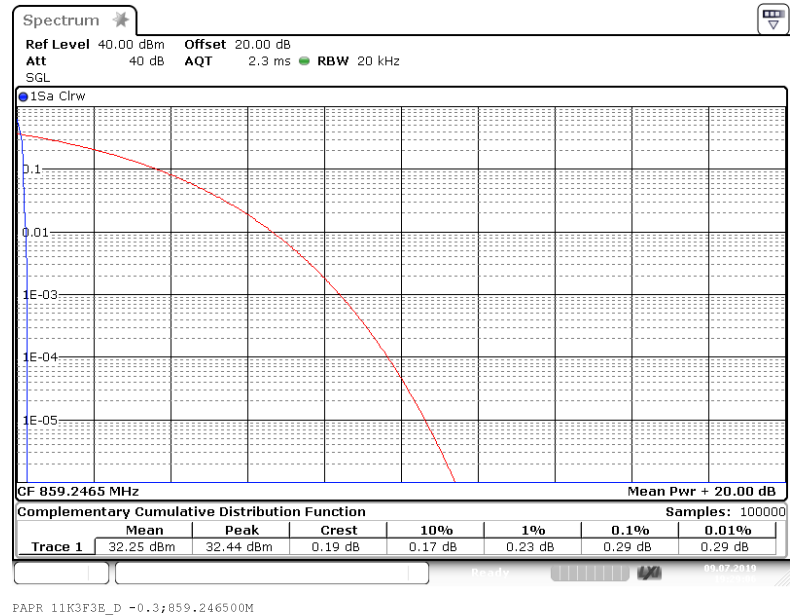


Frequency Band = 854 MHz – 862 MHz, Direction = RF downlink,
Input Power = 3 dB > AGC Emission Designator = 11K3F3E

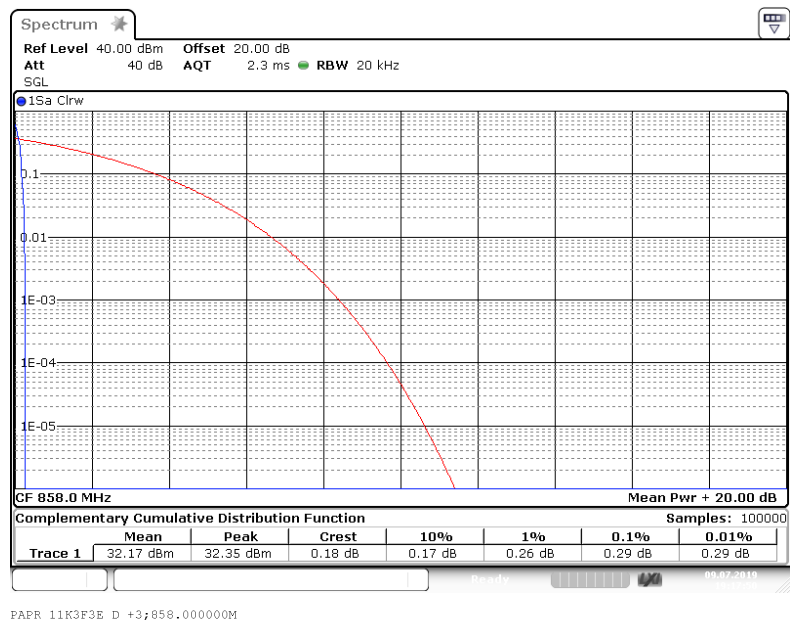


Frequency Band = 854 MHz – 862 MHz, Direction = RF downlink,
Input Power = 0.3 dB < AGC, Emission Designator = 8K10F1D

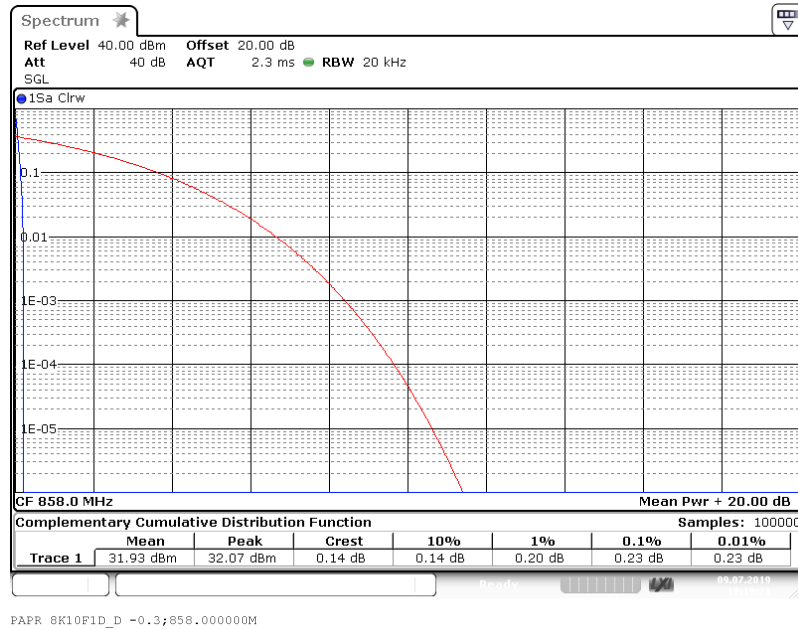


Frequency Band = 854 MHz – 862 MHz, Direction = RF downlink,
Input Power = 3 dB > AGC Emission Designator = 8K10F1D

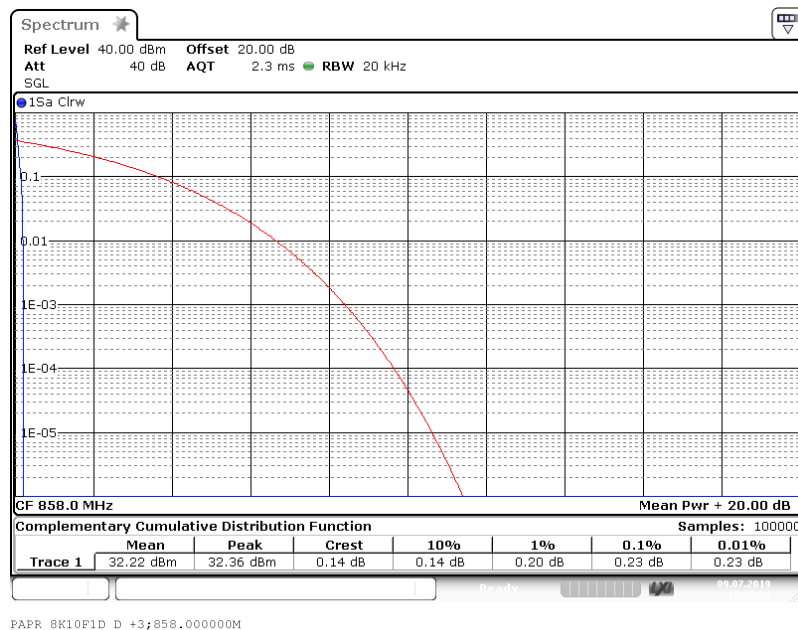


Frequency Band = 854 MHz – 862 MHz, Direction = RF downlink,
Input Power = 0.3 dB < AGC, Emission Designator = 9K80D7W

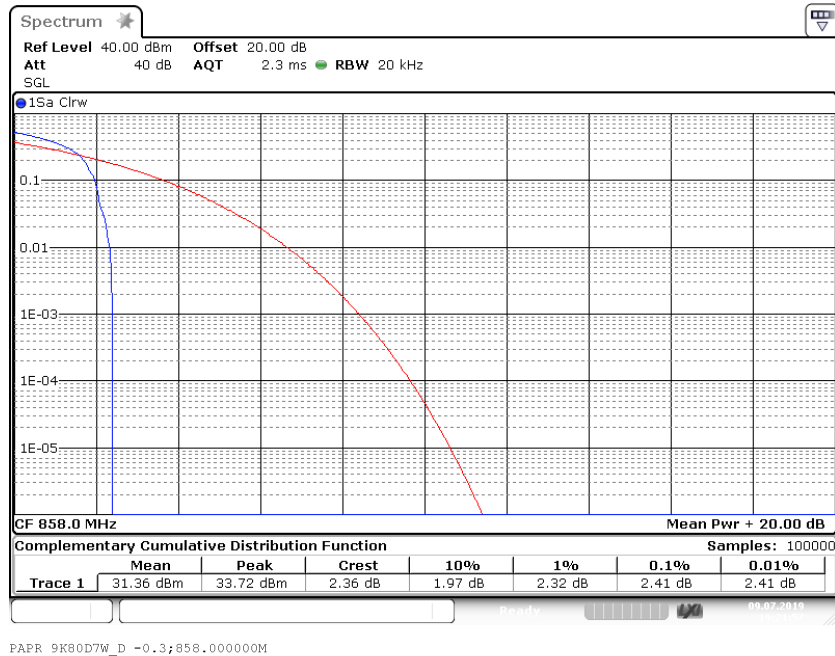


Frequency Band = 854 MHz – 862 MHz, Direction = RF downlink,
Input Power = 3 dB > AGC Emission Designator = 9K80D7W

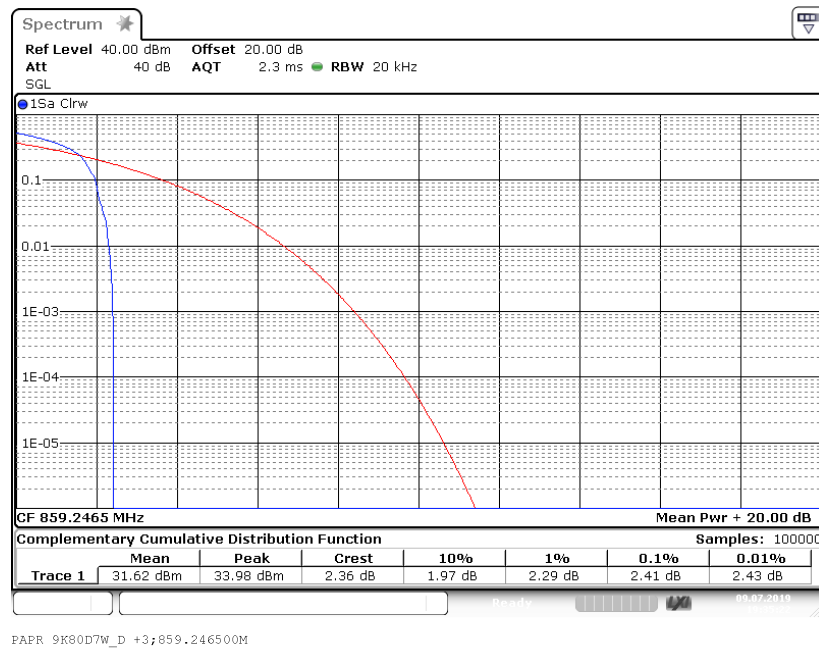


Frequency Band = 862 MHz – 869 MHz, Direction = RF downlink,
Input Power = 0.3 dB < AGC, Emission Designator = 4K00F3E

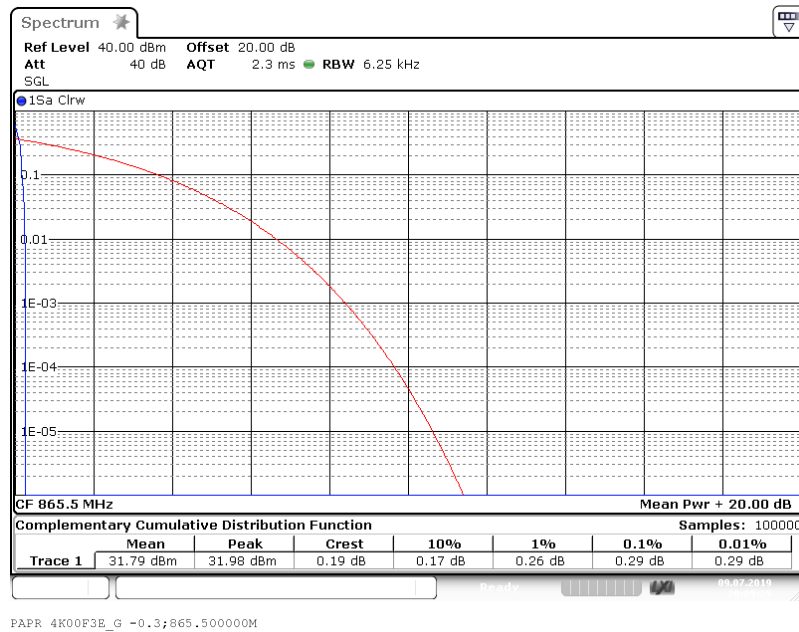

Frequency Band = 862 MHz – 869 MHz, Direction = RF downlink,
Input Power = 3 dB > AGC Emission Designator = 4K00F3E

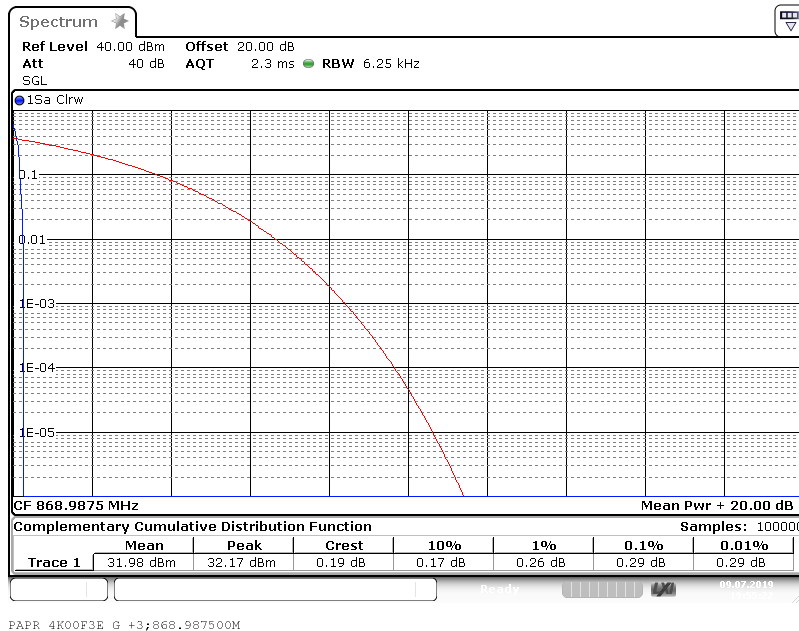


Frequency Band = 862 MHz – 869 MHz, Direction = RF downlink,
Input Power = 0.3 dB < AGC, Emission Designator = 11K3F3E

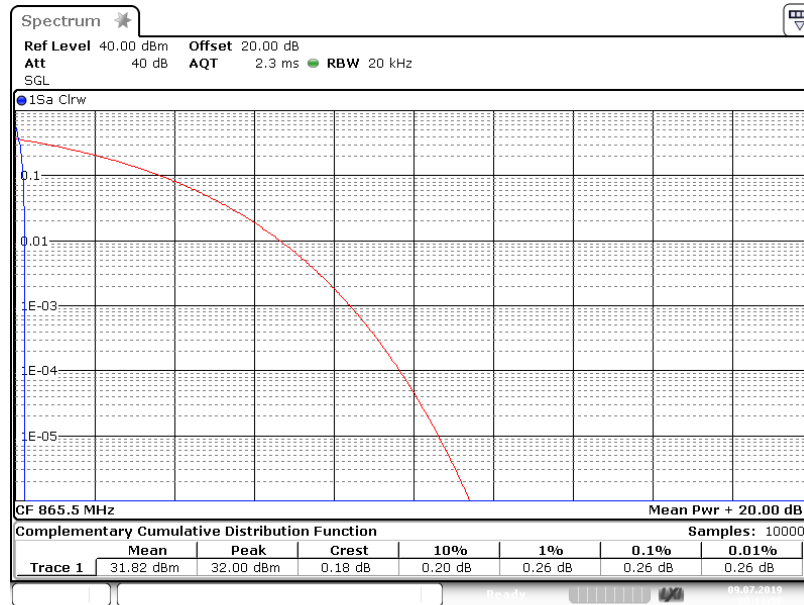


PAPR 11K3F3E_G -0.3;865.500000M

Frequency Band = 862 MHz – 869 MHz, Direction = RF downlink,
Input Power = 3 dB > AGC Emission Designator = 11K3F3E

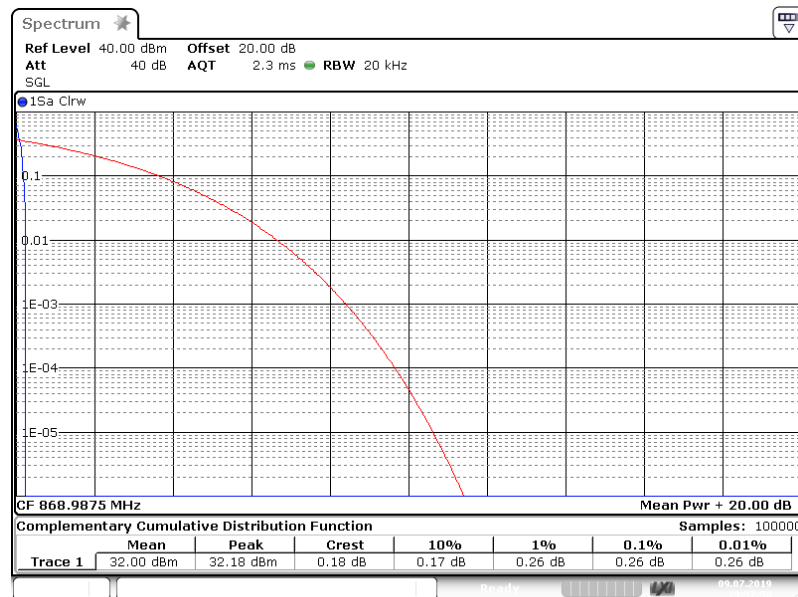


PAPR 11K3F3E_G +3;868.987500M


Frequency Band = 862 MHz – 869 MHz, Direction = RF downlink,
Input Power = 0.3 dB < AGC, Emission Designator = 8K10F1D

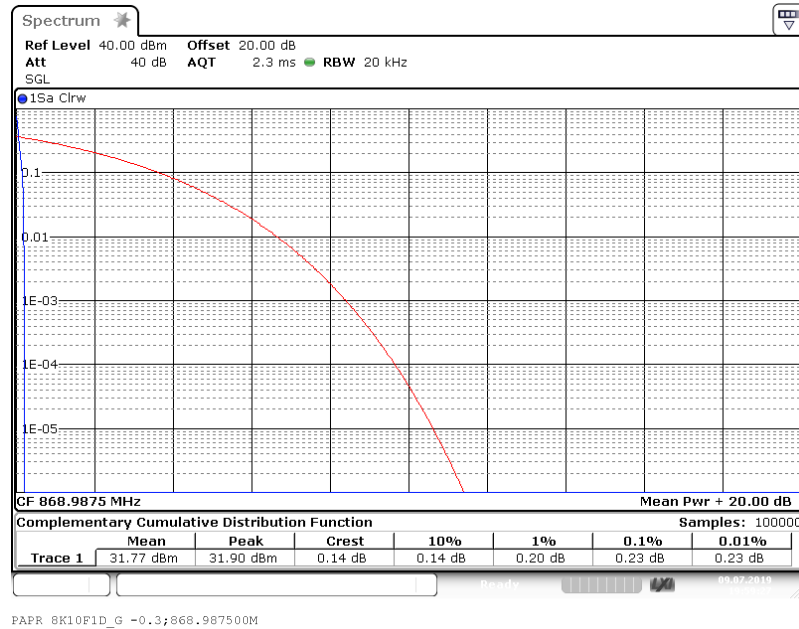


Frequency Band = 862 MHz – 869 MHz, Direction = RF downlink,
Input Power = 3 dB > AGC Emission Designator = 8K10F1D

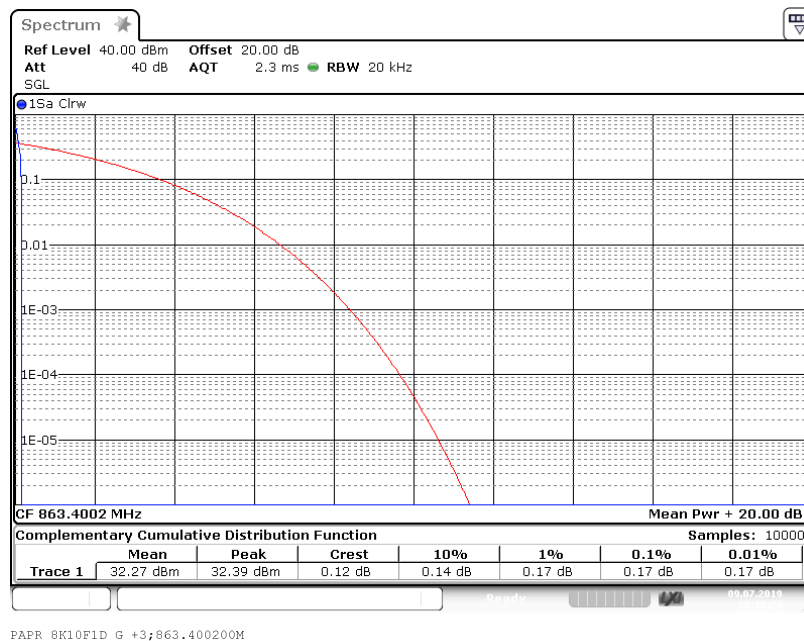


Frequency Band = 862 MHz – 869 MHz, Direction = RF downlink,
Input Power = 0.3 dB < AGC, Emission Designator = 9K80D7W

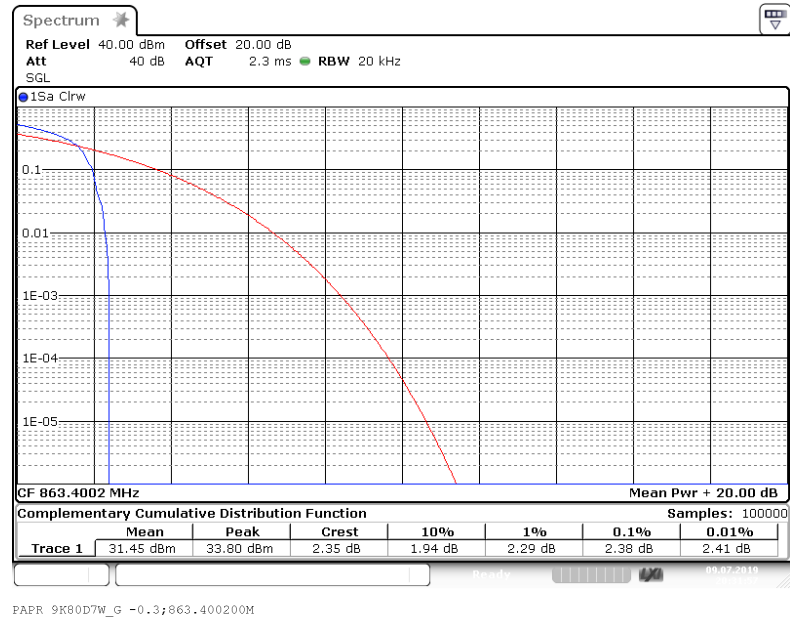


Frequency Band = 862 MHz – 869 MHz, Direction = RF downlink,
Input Power = 3 dB > AGC Emission Designator = 9K80D7W

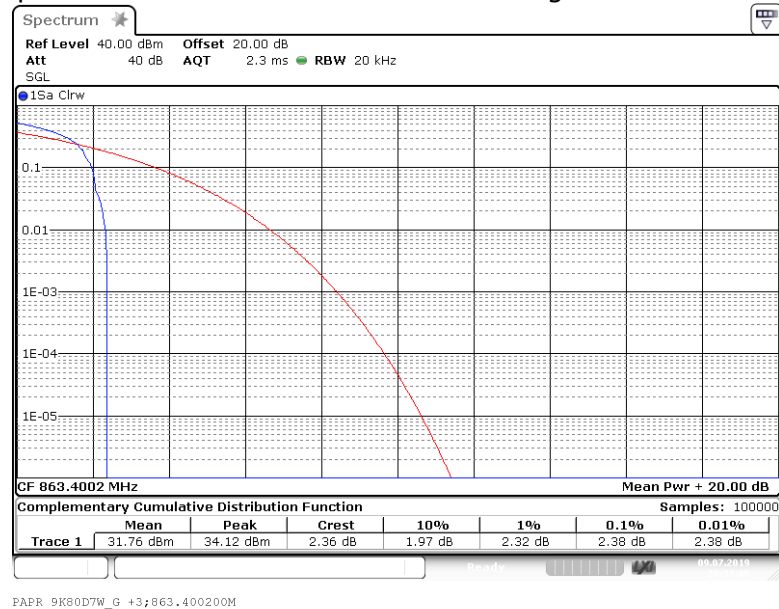


Frequency Band = 862 MHz – 869 MHz, Direction = RF downlink,
Input Power = 0.3 dB < AGC, Emission Designator = 16K0F3E

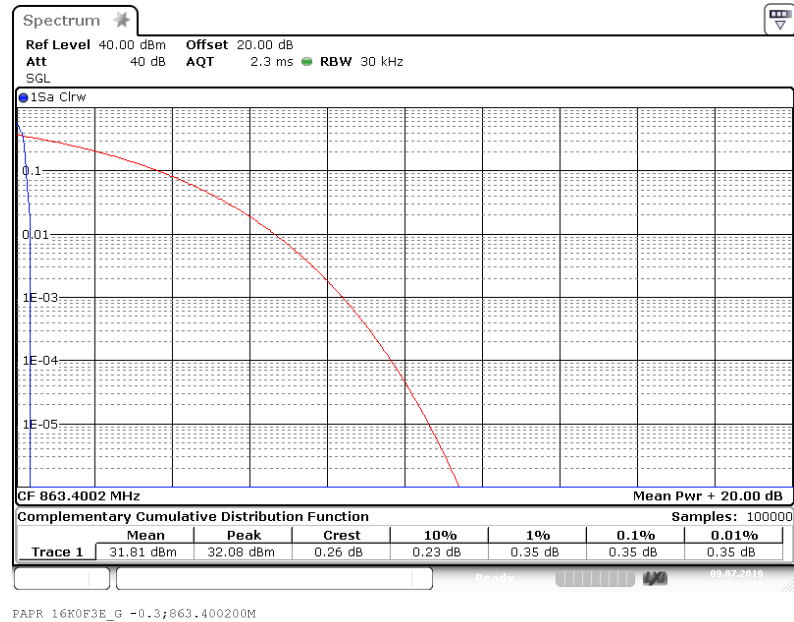


Frequency Band = 862 MHz – 869 MHz, Direction = RF downlink,
Input Power = 3 dB > AGC Emission Designator = 16K0F3E

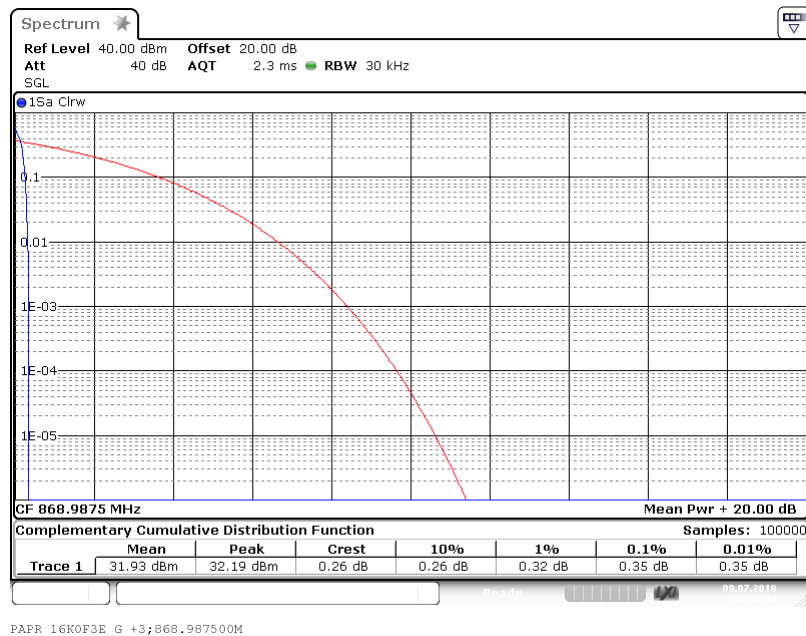


Frequency Band = 788 MHz – 798 MHz, Direction = RF uplink,
Input Power = 0.3 dB < AGC, Emission Designator = 5M00G7D

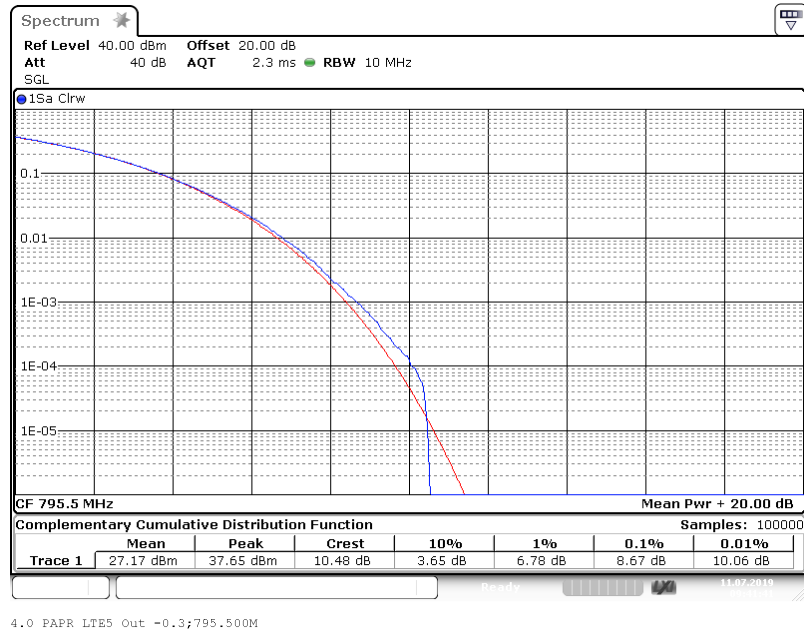

Frequency Band = 788 MHz – 798 MHz, Direction = RF uplink,
Input Power = 3 dB > AGC Emission Designator = 5M00G7D

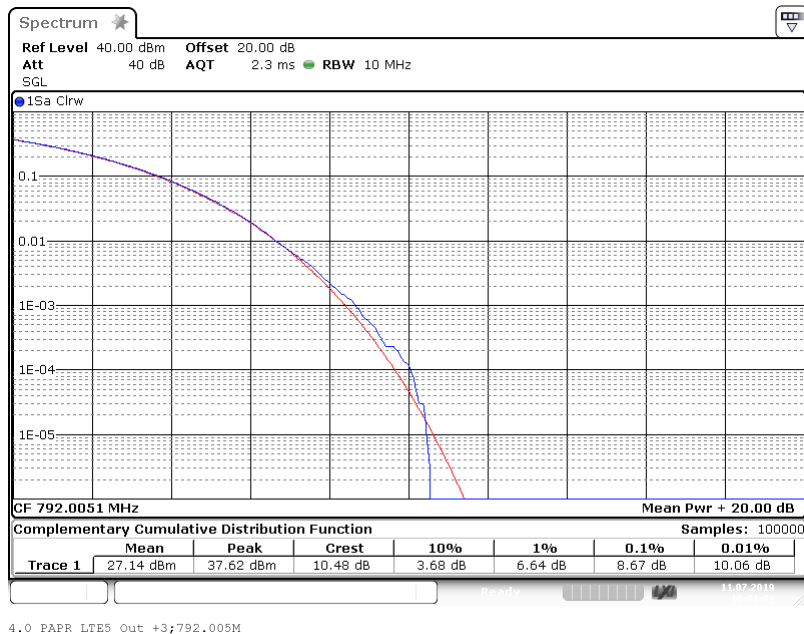

Frequency Band = 799 MHz – 805 MHz, Direction = RF uplink,
Input Power = 0.3 dB < AGC, Emission Designator = 4K00F3E

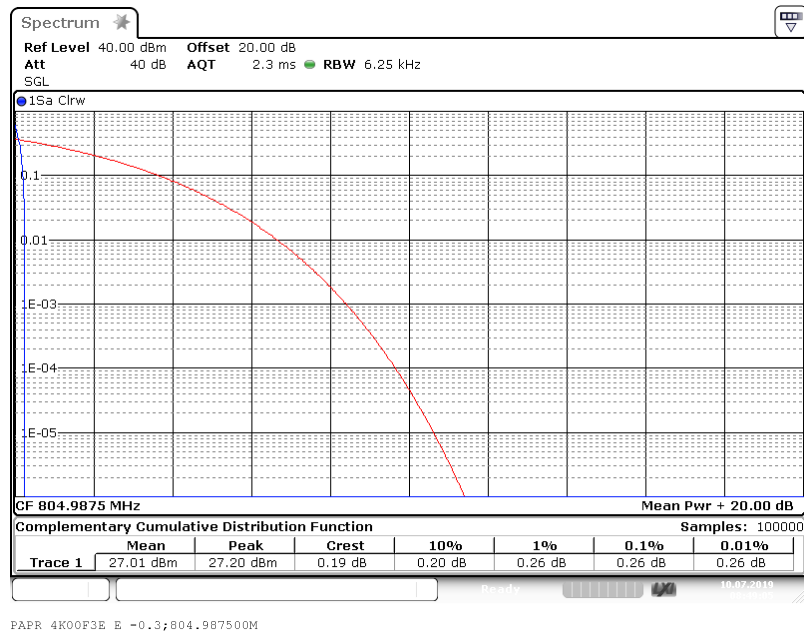

Frequency Band = 799 MHz – 805 MHz, Direction = RF uplink,
Input Power = 3 dB > AGC Emission Designator = 4K00F3E

