


Application Information	
04Version	5.244.350
TotalTime	3m 43s 875ms
AdditionalInfor	NULL

Passive Test For 2.4g								
Freq (MHz)	Effi (%)	Gain (dBi)	Gain (dBd)	UHS (%)	DHIS (%)	Max (dB)	Min (dB)	AttH (dB)
2400	7.2	-1.46	-3.61	6.765	0.432	-1.46	-40.65	43
2410	7.98	-1.11	-3.26	7.55	0.435	-1.11	-38.48	43.06
2420	8.26	-1	-3.15	7.843	0.416	-1	-36.74	43.19
2430	8.04	-1.11	-3.26	7.635	0.401	-1.11	-36.49	43.18
2440	8.66	-0.78	-2.93	8.241	0.421	-0.78	-35.34	43.26
2450	9.17	-0.51	-2.66	8.729	0.444	-0.51	-35.76	43.34
2460	7.25	-1.59	-3.74	6.919	0.33	-1.59	-38.23	43.06
2470	7	-1.64	-3.79	6.642	0.355	-1.64	-34.46	43.03
2480	8.14	-0.94	-3.09	7.694	0.442	-0.94	-33.18	43.28
2490	8.69	-0.57	-2.72	8.224	0.468	-0.57	-34.42	43.34
2500	7.98	-0.79	-2.94	7.546	0.439	-0.79	-36.21	43.41

2400.00MHz - 2500.00MHz Gain


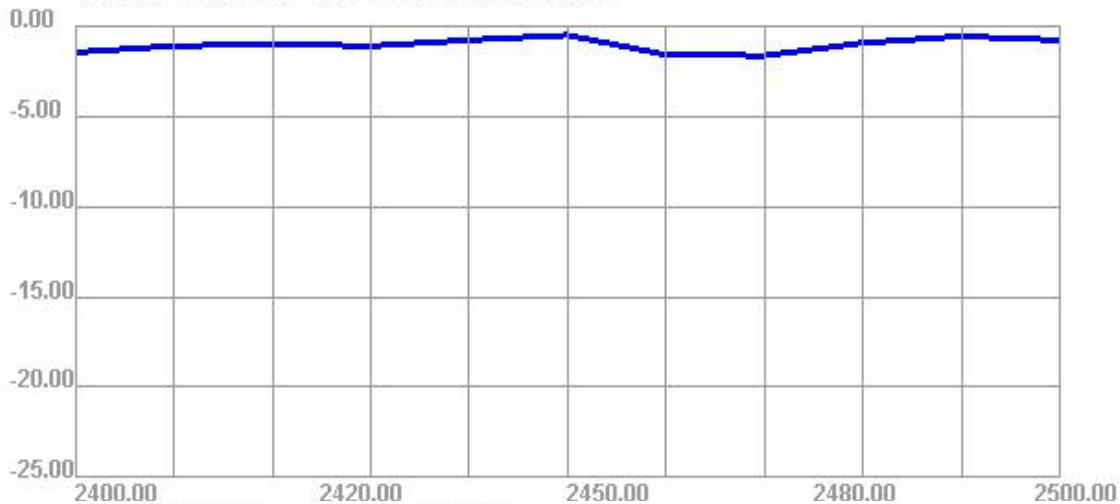


2400.00MHz - 2500.00MHz Efficiency




2400.000MHz


2400.000MHz H

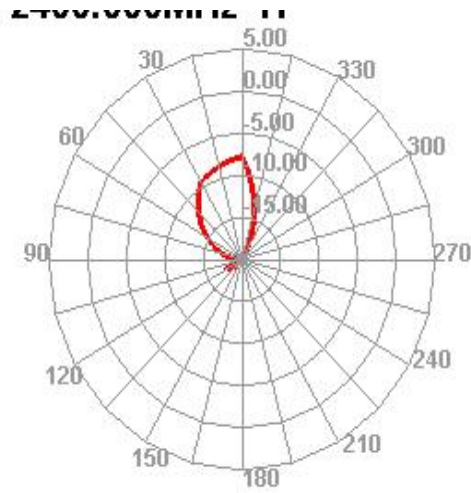


2400.000MHz E1

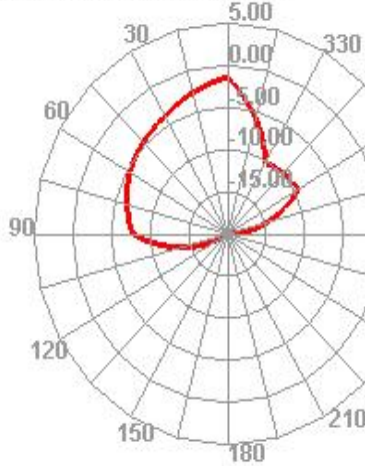


2400.000MHz E2

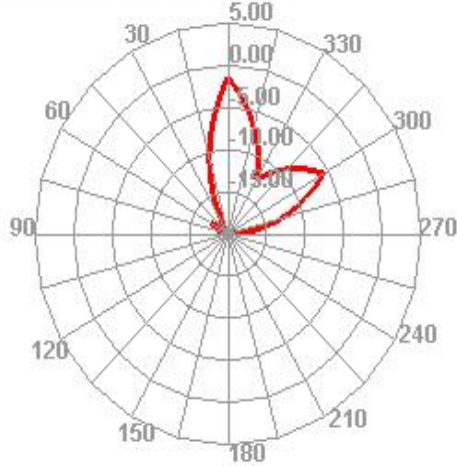

2450.000MHz



2450.000MHz H

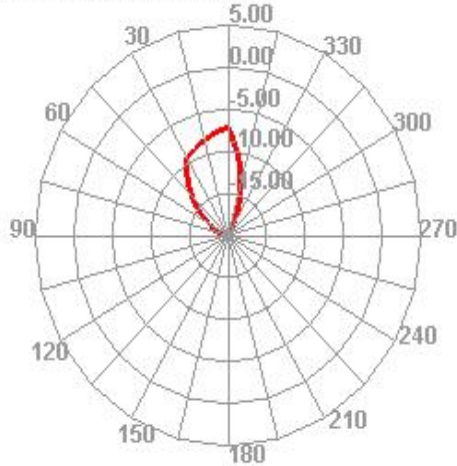


2450.000MHz E1




2450.000MHz E2







2500.000MHz

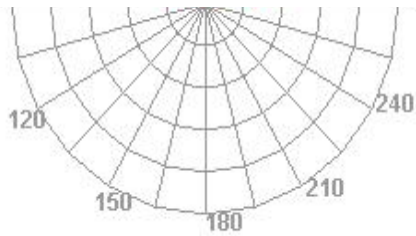

2500.000MHz H

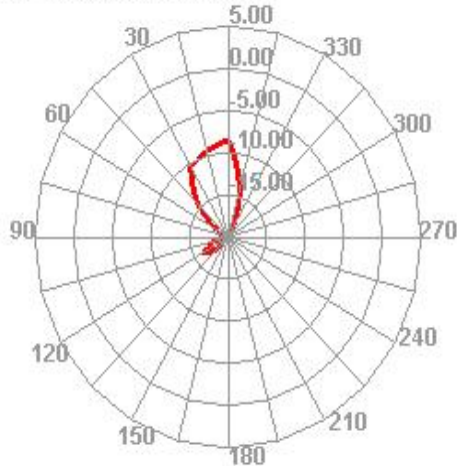

2500.000MHz E1

2500.000MHz E2

