



Shenzhen Huaxia Testing Technology Co., Ltd.

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

Telephone: +86-755-26648640

Fax: +86-755-26648637

Website: www.cqa-cert.com

Report Template Version: V05

Report Template Revision Date: 2021-11-03

TEST REPORT

Report No.: CQASZ20220801474E-01
Applicant: Shenzhen Unplug Optoelectronic Technology Co.,LTD
Address of Applicant: 1321, No.5 Golf Avenue, Guanlan street, Longhua District, Shenzhen
Equipment Under Test (EUT):
Product: LED TV backlight
Model No.: PJX-55, PJX-60, PJX-65
Test Model No.: PJX-65
Brand Name: Urquhart Studios
FCC ID: 2A8L4PJX-65
Standards: 47 CFR Part 15, Subpart C
Date of Receipt: 2022-8-25
Date of Test: 2022-8-25 to 2022-9-27
Date of Issue: 2022-10-20
Test Result : **PASS***

*In the configuration tested, the EUT complied with the standards specified above

Tested By: _____

Lewis Zhou

(Lewis Zhou)

Reviewed By: _____

Timo Lei

(Timo Lei)

Approved By: _____

Jack Ai

(Jack Ai)



1 Version

Revision History Of Report

Report No.	Version	Description	Issue Date
CQASZ20220801474E-01	Rev.01	Initial report	2022-10-20

2 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10 2013	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10 2013	PASS
Conducted Peak & Average Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(3)	ANSI C63.10 2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(2)	ANSI C63.10 2013	PASS
Power Spectral Density	47 CFR Part 15, Subpart C Section 15.247 (e)	ANSI C63.10 2013	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 2013	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 2013	PASS
Radiated Spurious Emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2013	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2013	PASS

3 Contents

	Page
1 VERSION	2
2 TEST SUMMARY	3
3 CONTENTS	4
4 GENERAL INFORMATION	5
4.1 CLIENT INFORMATION	5
4.2 GENERAL DESCRIPTION OF EUT	5
4.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD	5
4.4 TEST ENVIRONMENT AND MODE	7
4.5 DESCRIPTION OF SUPPORT UNITS	15
4.6 TEST LOCATION	15
4.7 TEST FACILITY	15
4.8 STATEMENT OF THE MEASUREMENT UNCERTAINTY	16
4.9 DEVIATION FROM STANDARDS	16
4.10 ABNORMALITIES FROM STANDARD CONDITIONS	16
4.11 OTHER INFORMATION REQUESTED BY THE CUSTOMER	16
4.12 EQUIPMENT LIST	17
5 TEST RESULTS AND MEASUREMENT DATA	18
5.1 ANTENNA REQUIREMENT	18
5.2 CONDUCTED EMISSIONS	19
5.3 CONDUCTED PEAK & AVERAGE OUTPUT POWER	23
<i>Test Result</i>	24
<i>Test Graphs</i>	25
5.4 6DB OCCUPY BANDWIDTH	31
<i>Test Result</i>	32
<i>Test Graphs</i>	33
5.5 POWER SPECTRAL DENSITY	38
<i>Test Result</i>	39
<i>Test Graphs</i>	40
5.6 BAND-EDGE FOR RF CONDUCTED EMISSIONS	46
<i>Test Result</i>	47
5.6.1 <i>Test Graphs</i>	48
5.7 RF CONDUCTED SPURIOUS EMISSIONS	52
<i>Test Result</i>	53
<i>Test Graphs</i>	55
5.8 RADIATED SPURIOUS EMISSIONS	73
5.8.1 <i>Radiated emission below 1GHz</i>	76
5.8.2 <i>Transmitter emission above 1GHz</i>	78
5.9 RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY	80
6 PHOTOGRAPHS - EUT TEST SETUP	86
6.1 CONDUCTED EMISSION	87
7 PHOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS	88

4 General Information

4.1 Client Information

Applicant:	Shenzhen Unplug Optoelectronic Technology Co.,LTD
Address of Applicant:	1321, No.5 Golf Avenue, Guanlan street, Longhua District, Shenzhen
Manufacturer:	Shenzhen Unplug Optoelectronic Technology Co.,LTD
Address of Manufacturer:	1321, No.5 Golf Avenue, Guanlan street, Longhua District, Shenzhen
Factory:	Shenzhen Unplug Optoelectronic Technology Co.,LTD
Address of Factory:	1321, No.5 Golf Avenue, Guanlan street, Longhua District, Shenzhen

4.2 General Description of EUT

Product Name:	LED TV backlight
Model No.:	PJX-55, PJX-60, PJX-65
Test Model No.:	PJX-65
Trade Mark:	Urquhart Studios
Software Version:	T866_20220622.img
Hardware Version:	ZH902_T866_DDR3*4_V1.1
Power Supply:	MODEL:KA2401A-1202000US INPUT:100-240V~ 50/60Hz 0.65A Max OUTPUT:12V= 2000mA
EUT Supports Radios application:	2.4GHz: Wi-Fi: 802.11b/g/n(HT20): 2412MHz~2462MHz; 802.11n(HT40): 2422MHz~2452MHz

4.3 Product Specification subjective to this standard

Operation Frequency:	IEEE 802.11b/g/n(HT20): 2412MHz to 2462MHz IEEE 802.11n(HT40): 2422MHz to 2452MHz
Channel Numbers:	IEEE 802.11b/g, IEEE 802.11n HT20: 11 Channels IEEE 802.11n HT40: 7 Channels
Channel Separation:	5MHz
Type of Modulation:	IEEE for 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE for 802.11g : OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE for 802.11n(HT20 and HT40) : OFDM (64QAM, 16QAM, QPSK, BPSK)
Transfer Rate:	IEEE for 802.11b: 1Mbps/2Mbps/5.5Mbps/11Mbps IEEE for 802.11g : 6Mbps/9Mbps/12Mbps/18Mbps/24Mbps/36Mbps/48Mbps/54Mbps IEEE for 802.11n(HT20) : 6.5Mbps/13Mbps/19.5Mbps/26Mbps/39Mbps/52Mbps/58.5Mbps/65Mbps IEEE for 802.11n(HT40) : 13.5Mbps/27Mbps/40.5Mbps/54Mbps/81Mbps/108Mbps/121.5Mbps/135Mbps
Product Type:	<input checked="" type="checkbox"/> Mobile <input type="checkbox"/> Portable <input type="checkbox"/> Fix Location
Test Software of EUT:	ADB
Antenna Type:	metal antenna
Antenna Gain:	2.55dBi

Operation Frequency each of channel(802.11b/g/n HT20)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		
Operation Frequency each of channel(802.11n HT40)							
Channel	Frequency	Channel	Frequency	Channel	Frequency		
3	2422MHz	6	2437MHz	9	2452MHz		
4	2427MHz	7	2442MHz				
5	2432MHz	8	2447MHz				

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

For 802.11b/g/n (HT20):

Channel	Frequency
The Lowest channel	2412MHz
The Middle channel	2437MHz
The Highest channel	2462MHz

For 802.11n (HT40):

Channel	Frequency
The Lowest channel	2422MHz
The Middle channel	2437MHz
The Highest channel	2452MHz


Note:

Software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel individually.

4.4 Test Environment and Mode

Operating Environment:	
Radiated Emissions:	
Temperature:	25.3 °C
Humidity:	55 % RH
Atmospheric Pressure:	1009 mbar
Conducted Emissions:	
Temperature:	25.6 °C
Humidity:	60 % RH
Atmospheric Pressure:	1009 mbar
Radio conducted item test (RF Conducted test room):	
Temperature:	25.5 °C
Humidity:	52 % RH
Atmospheric Pressure:	1009 mbar
Test mode:	
Transmitting mode:	Keep the EUT in transmitting mode with all kind of modulation and all kind of data rate.

Run Software:

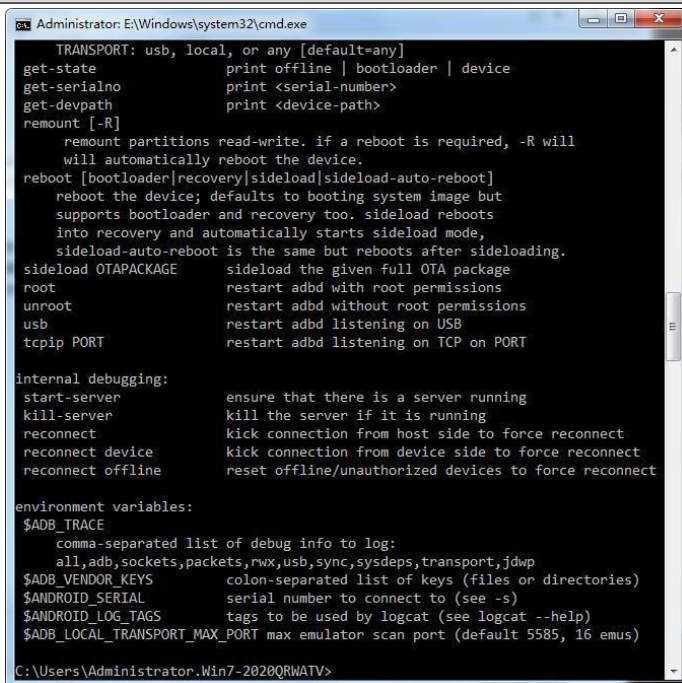

```
Administrator: E:\Windows\system32\cmd.exe
TRANSPORT: usb, local, or any [default=any]
get-state          print offline | bootloader | device
get-serialno      print <serial-number>
get-devpath       print <device-path>
remount [-R]
    remount partitions read-write. if a reboot is required, -R will
    will automatically reboot the device.
reboot [bootloader|recovery|sideload|sideload-auto-reboot]
    reboot the device; defaults to booting system image but
    supports bootloader and recovery too. sideload reboots
    into recovery and automatically starts sideload mode,
    sideload-auto-reboot is the same but reboots after sideloading.
sideload OTAPACKAGE
    sideload the given full OTA package
root              restart adb with root permissions
unroot            restart adb without root permissions
usb               restart adb listening on USB
tcpip PORT        restart adb listening on TCP on PORT

internal debugging:
start-server      ensure that there is a server running
kill-server       kill the server if it is running
reconnect         kick connection from host side to force reconnect
reconnect device  kick connection from device side to force reconnect
reconnect offline reset offline/unauthorized devices to force reconnect

environment variables:
$ADB_TRACE
    comma-separated list of debug info to log:
    all,adb,sockets,packets,rwx,usb,sysdeps,transport,jdwp
$ADB_VENDOR_KEYS
    colon-separated list of keys (files or directories)
$ANDROID_SERIAL
    serial number to connect to (see -s)
$ANDROID_LOG_TAGS
    tags to be used by logcat (see logcat --help)
$ADB_LOCAL_TRANSPORT_MAX_PORT
    max emulator scan port (default 5585, 16 emus)


C:\Users\Administrator.Win7-2020QRWATV>
```


Operated Mode for Worst Duty Cycle:		
Test Mode	Duty Cycle(%)	Average correction factor(dB)
IEEE802.11b	99.52	0.02
IEEE802.11g	97.18	0.12
IEEE802.11n (HT20)	97.01	0.13
IEEE802.11n (HT40)	94.20	0.26

Remark:

- 1) Duty cycle= On Time/ Period;
- 2) Duty Cycle factor = $10 * \log(1/ \text{Duty cycle})$;



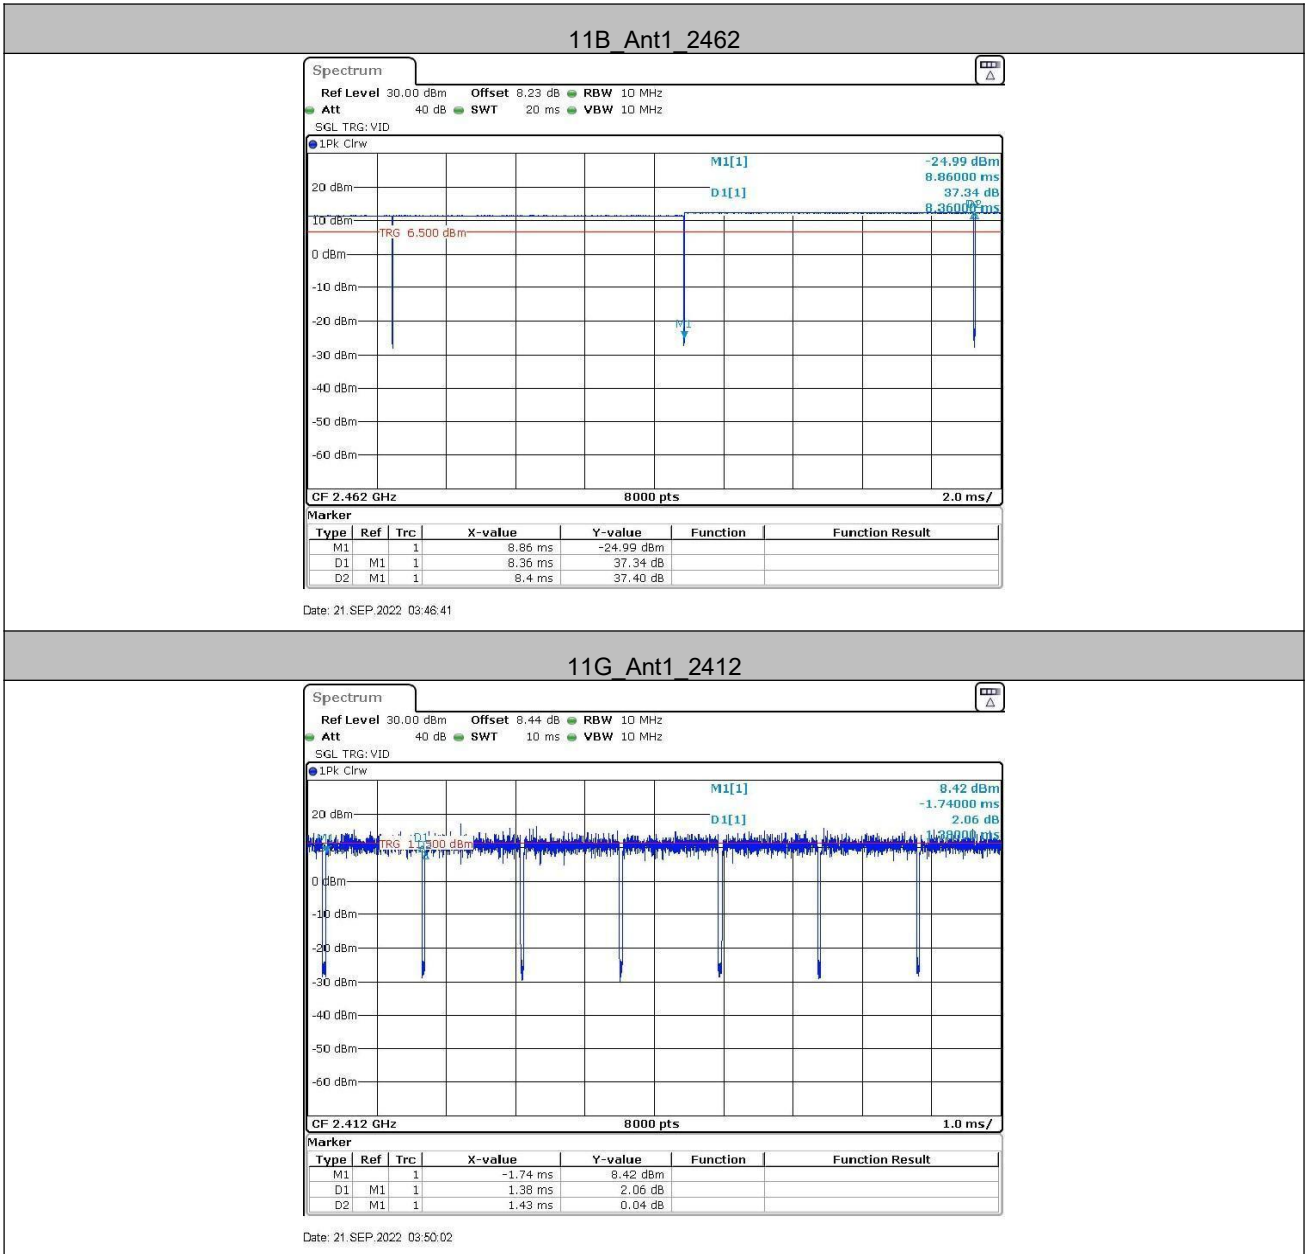

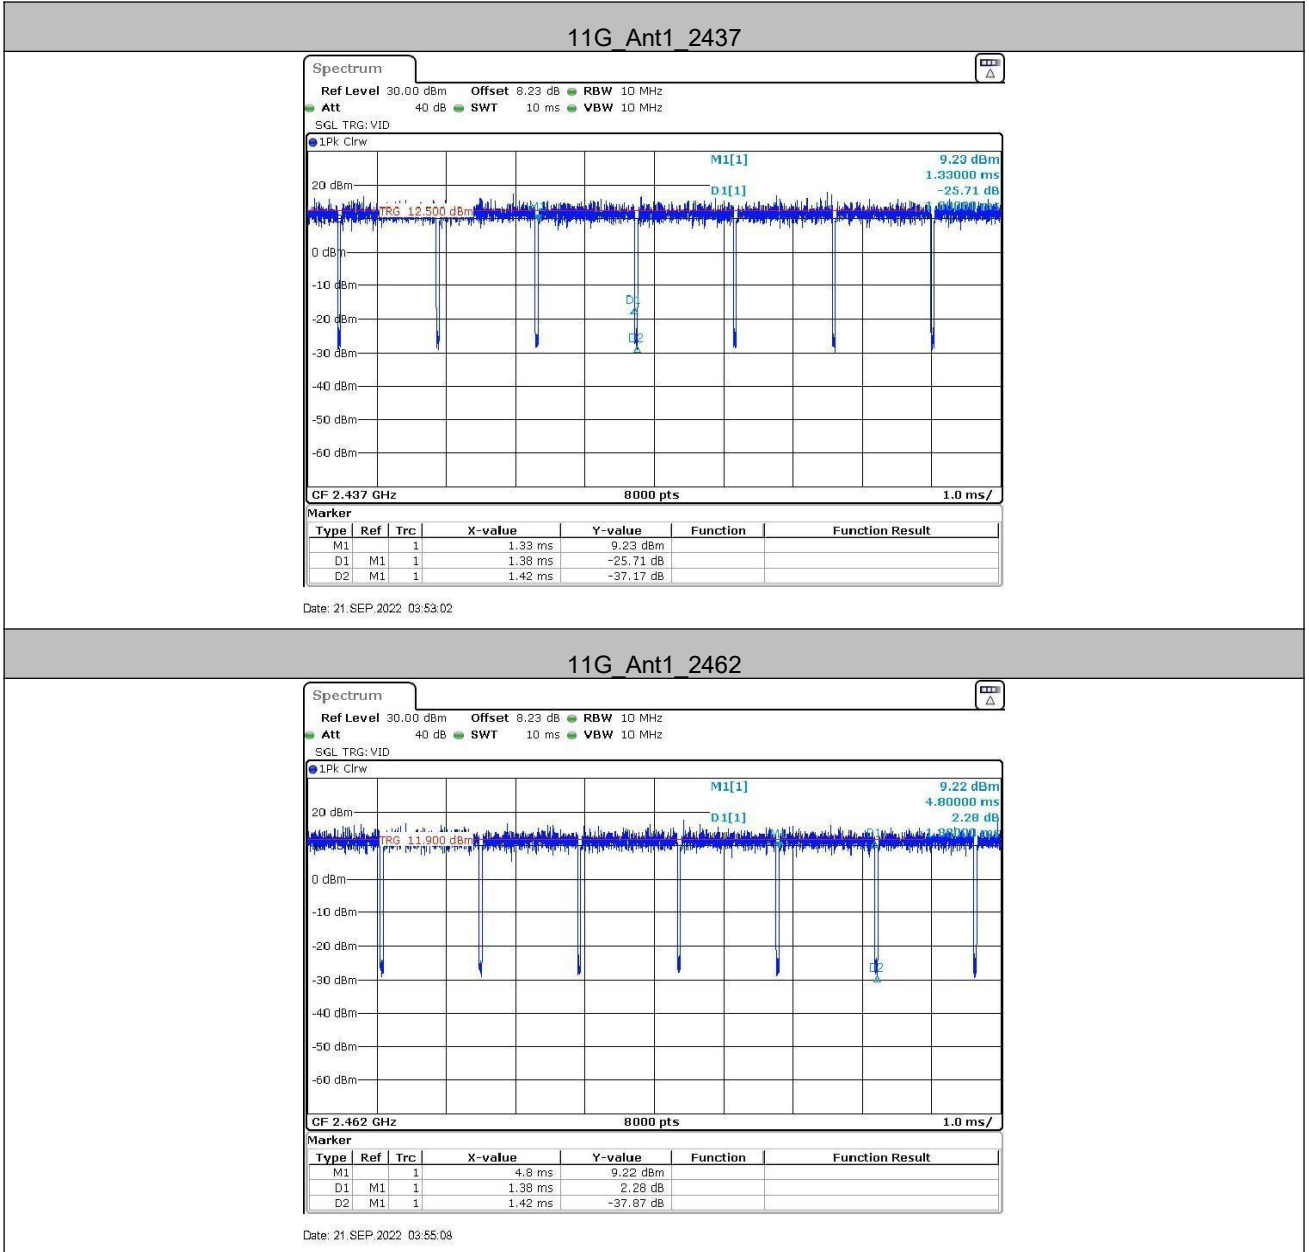







4.5 Description of Support Units

The EUT has been tested with associated equipment below.

1) Support equipment

Description	Manufacturer	Model No.	Certification	Supplied by
/	/	/	/	/

2) Cable

Cable No.	Description	Manufacturer	Cable Type/Length	Supplied by
/	/	/	/	/

4.6 Test Location

All tests were performed at:

Shenzhen Huaxia Testing Technology Co., Ltd.

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua New District, Shenzhen, Guangdong, China

4.7 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **A2LA (Certificate No. 4742.01)**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4742.01.

- **FCC Registration No.: 522263**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.:522263

4.8 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate.

The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities.

The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the **Shenzhen Huaxia Testing Technology Co., Ltd.** quality system acc. to DIN EN ISO/IEC 17025.

Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CQA laboratory is reported:

No.	Item	Uncertainty	Notes
1	Radiated Emission (Below 1GHz)	5.12dB	(1)
2	Radiated Emission (Above 1GHz)	4.60dB	(1)
3	Conducted Disturbance (0.15~30MHz)	3.34dB	(1)
4	Radio Frequency	3×10^{-8}	(1)
5	Duty cycle	0.6 %.	(1)
6	Occupied Bandwidth	1.1%	(1)
7	RF conducted power	0.86dB	(1)
8	RF power density	0.74	(1)
9	Conducted Spurious emissions	0.86dB	(1)
10	Temperature test	0.8°C	(1)
11	Humidity test	2.0%	(1)
12	Supply voltages	0.5 %.	(1)
13	Frequency Error	5.5 Hz	(1)

(1)This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

4.9 Deviation from Standards

None.

4.10 Abnormalities from Standard Conditions

None.

4.11 Other Information Requested by the Customer

None.

4.12 Equipment List


Test Equipment	Manufacturer	Model No.	Instrument No.	Calibration Date	Calibration Due Date
EMI Test Receiver	R&S	ESR7	CQA-005	2022/09/9	2023/09/08
Spectrum analyzer	R&S	FSU26	CQA-038	2022/09/9	2023/09/08
Spectrum analyzer	R&S	FSU40	CQA-075	2022/09/9	2023/09/08
Preamplifier	MITEQ	AFS4-00010300-18-10P-4	CQA-035	2022/09/9	2023/09/08
Preamplifier	MITEQ	AMF-6D-02001800-29-20P	CQA-036	2022/09/9	2023/09/08
Preamplifier	EMCI	EMC184055SE	CQA-089	2022/09/9	2023/09/08
Loop antenna	Schwarzbeck	FMZB1516	CQA-060	2021/09/16	2024/09/15
Bilog Antenna	R&S	HL562	CQA-011	2021/09/16	2024/09/15
Horn Antenna	R&S	HF906	CQA-012	2021/09/16	2024/09/15
Horn Antenna	Schwarzbeck	BBHA 9170	CQA-088	2021/09/16	2024/09/15
Coaxial Cable (Above 1GHz)	CQA	N/A	C007	2022/09/9	2023/09/08
Coaxial Cable (Below 1GHz)	CQA	N/A	C013	2022/09/9	2023/09/08
RF cable(9KHz~40GHz)	CQA	RF-01	CQA-079	2022/09/9	2023/09/08
Antenna Connector	CQA	RFC-01	CQA-080	2022/09/9	2023/09/08
Power Sensor	KEYSIGHT	U2021XA	CQA-30	2022/09/9	2023/09/08
N1918A Power Analysis Manager Power Panel	Agilent	N1918A	CQA-074	2022/09/9	2023/09/08
Power meter	R&S	NRVD	CQA-029	2022/09/9	2023/09/08
Power divider	MIDWEST	PWD-2533-02-SMA-79	CQA-067	2022/09/9	2023/09/08
EMI Test Receiver	R&S	ESR7	CQA-005	2022/09/9	2023/09/08
LISN	R&S	ENV216	CQA-003	2022/09/9	2023/09/08
Coaxial cable	CQA	N/A	CQA-C009	2022/09/9	2023/09/08
DC power	KEYSIGHT	E3631A	CQA-028	2022/09/9	2023/09/08

Test software:


	Manufacturer	Software brand
Radiated Emissions test software	Tonscend	JS1120-3
Conducted Emissions test software	Audix	e3
RF Conducted test software	Audix	e3

5 Test results and Measurement Data

5.1 Antenna Requirement

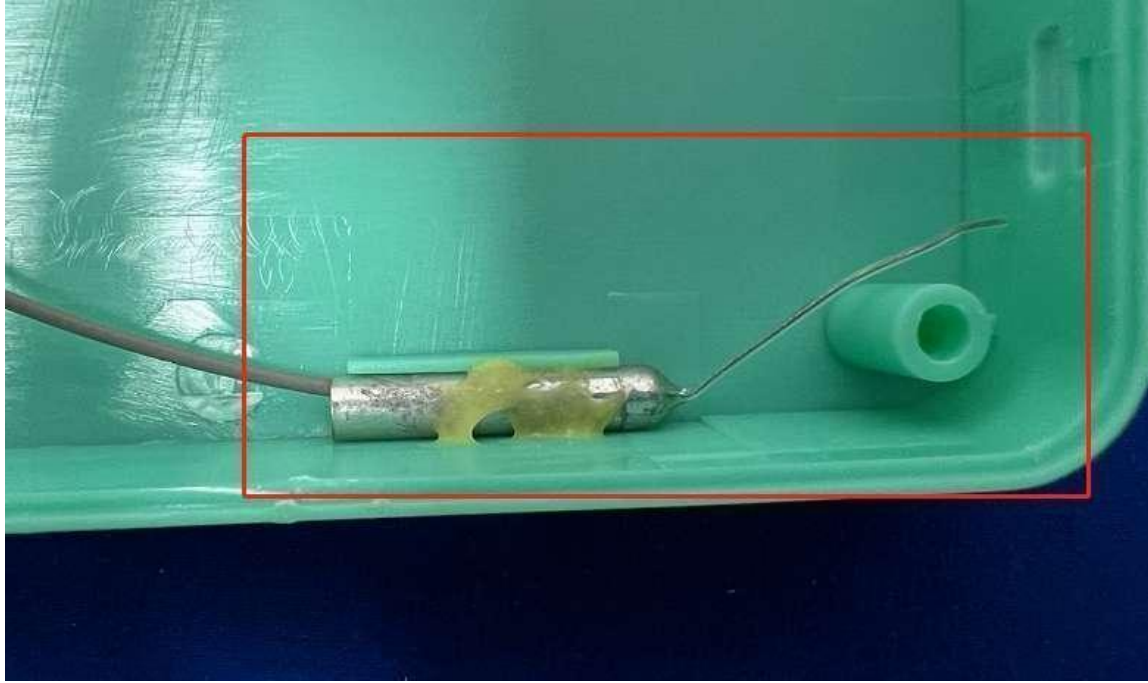Standard requirement:	47 CFR Part 15C Section 15.203 /247(c)
<p>15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p>	
EUT Antenna:	
<p>The antenna is metal antenna. The best case gain of the antenna is 2.55 dBi.</p>	


5.2 Conducted Emissions

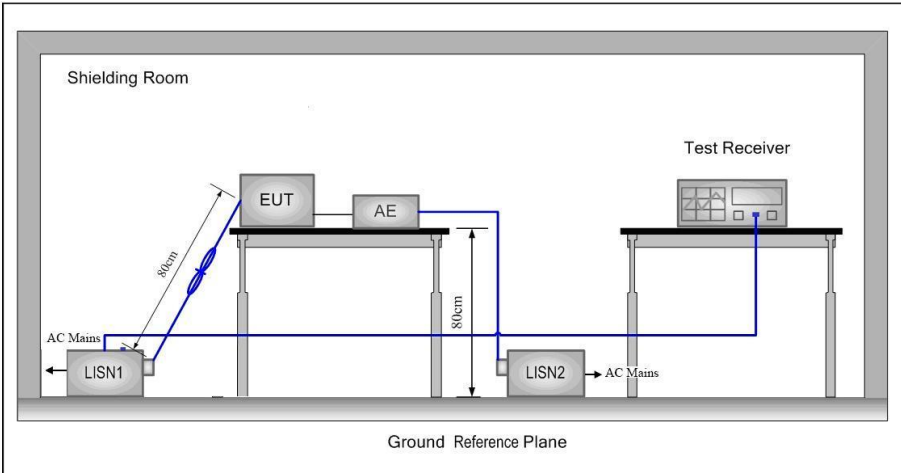Test Requirement:	47 CFR Part 15C Section 15.207														
Test Method:	ANSI C63.10: 2013														
Test Frequency Range:	150kHz to 30MHz														
Limit:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
	Frequency range (MHz)		Limit (dBuV)												
		Quasi-peak	Average												
	0.15-0.5	66 to 56*	56 to 46*												
	0.5-5	56	46												
5-30	60	50													
* Decreases with the logarithm of the frequency.															
Test Procedure:	1) The mains terminal disturbance voltage test was conducted in a shielded room.														
	2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.														
	3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,														
	4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.														
	5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.														
Test Setup:															

Exploratory Test Mode:	Transmitting with all kind of modulations, data rates at lowest, middle and highest channel.
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate of 802.11b at middle channel is the worst case. Only the worst case is recorded in the report.
Test Voltage:	AC120V/60Hz
Test Results:	Pass

Measurement Data

Live Line:

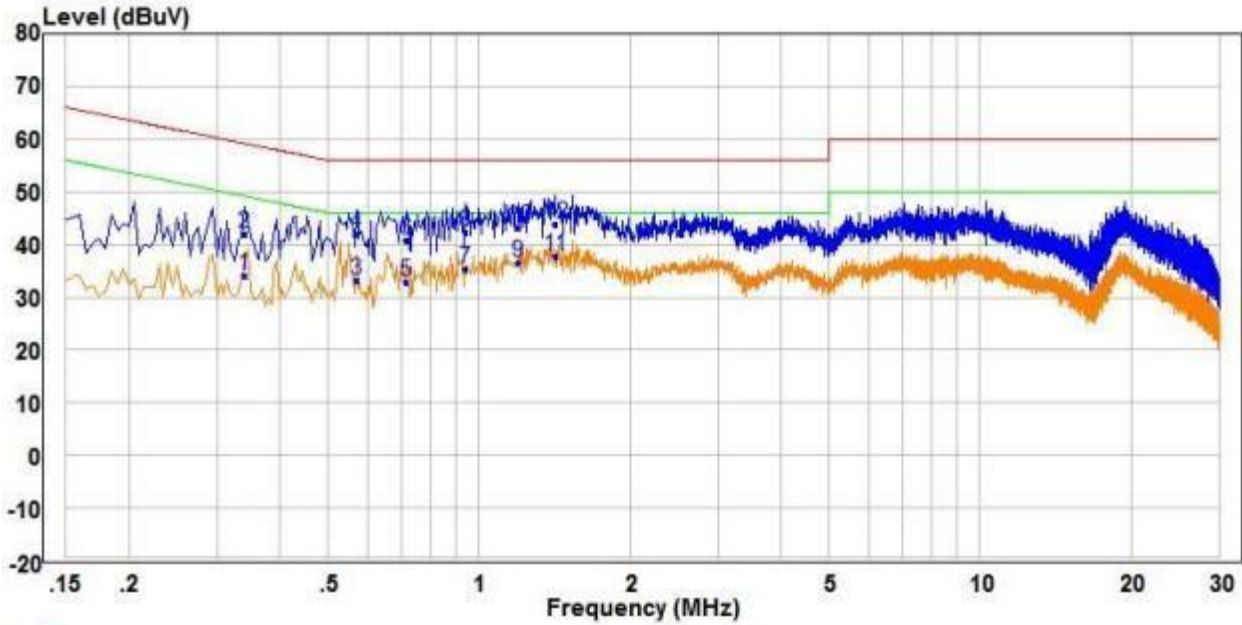


	Freq	Read	Factor	Level	Limit	Over	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB		
1	0.340	24.60	9.54	34.14	49.20	-15.06	Average	Line
2	0.340	32.44	9.54	41.98	59.20	-17.22	QP	Line
3	0.570	23.58	9.77	33.35	46.00	-12.65	Average	Line
4	0.570	32.23	9.77	42.00	56.00	-14.00	QP	Line
5	0.715	22.94	9.89	32.83	46.00	-13.17	Average	Line
6	0.715	31.06	9.89	40.95	56.00	-15.05	QP	Line
7	0.940	25.63	9.74	35.37	46.00	-10.63	Average	Line
8	0.940	32.72	9.74	42.46	56.00	-13.54	QP	Line
9	1.195	26.46	10.20	36.66	46.00	-9.34	Average	Line
10	1.195	33.04	10.20	43.24	56.00	-12.76	QP	Line
11 PP	1.420	26.98	10.68	37.66	46.00	-8.34	Average	Line
12 QP	1.420	33.01	10.68	43.69	56.00	-12.31	QP	Line

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

Neutral Line:

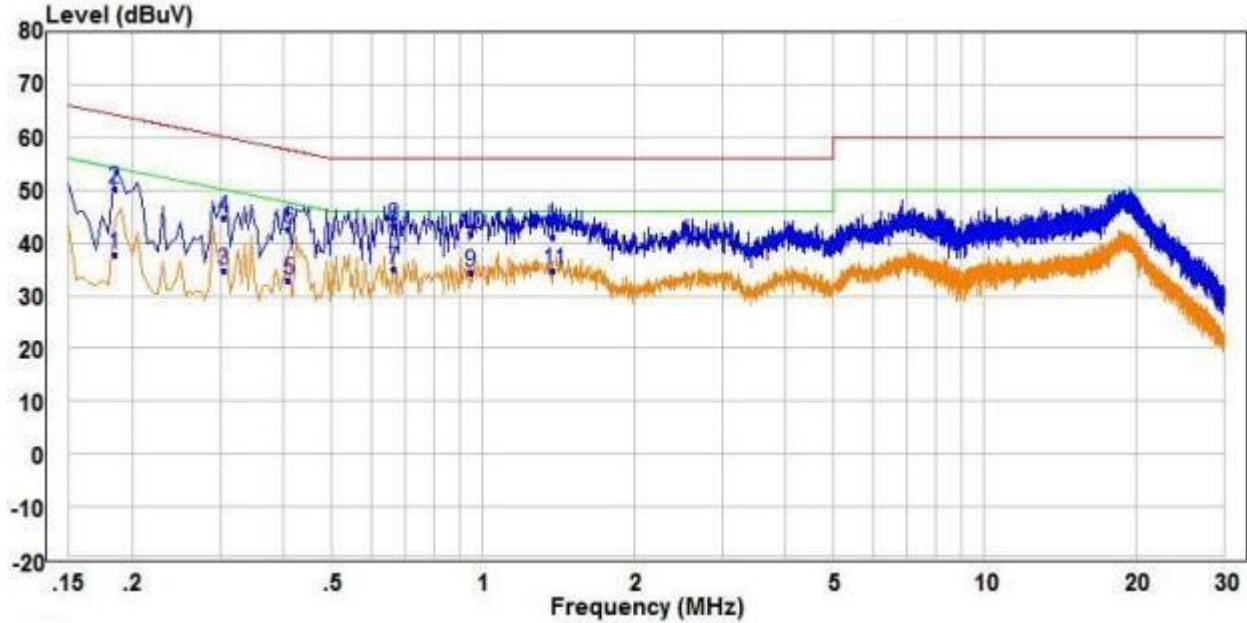


	Read Freq	Read Level	Factor	Limit Level	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dB		
1	0.185	28.14	9.63	37.77	54.26	-16.49 Average	Neutral
2	0.185	40.56	9.63	50.19	64.26	-14.07 QP	Neutral
3	0.305	25.33	9.49	34.82	50.11	-15.29 Average	Neutral
4	0.305	35.40	9.49	44.89	60.11	-15.22 QP	Neutral
5	0.410	23.28	9.61	32.89	47.65	-14.76 Average	Neutral
6	0.410	32.98	9.61	42.59	57.65	-15.06 QP	Neutral
7	PP 0.665	25.04	9.87	34.91	46.00	-11.09 Average	Neutral
8	QP 0.665	33.33	9.87	43.20	56.00	-12.80 QP	Neutral
9	0.945	24.79	9.74	34.53	46.00	-11.47 Average	Neutral
10	0.945	32.06	9.74	41.80	56.00	-14.20 QP	Neutral
11	1.380	25.10	9.72	34.82	46.00	-11.18 Average	Neutral
12	1.380	31.27	9.72	40.99	56.00	-15.01 QP	Neutral

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.


5.3 Conducted Peak & Average Output Power

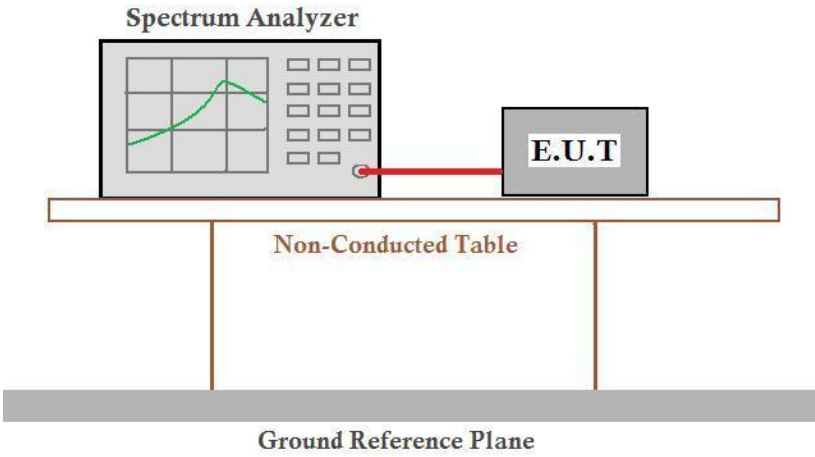
Test Requirement:	47 CFR Part 15C Section 15.247 (b)(3)
Test Method:	ANSI C63.10: 2013
Test Setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by a Ground Reference Plane.</p>
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40). Only the worst case is recorded in the report.
Limit:	30dBm
Test Results:	Pass


Test Result


TestMode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
11B	Ant1	2412	7.25	≤30	PASS
		2437	8.04	≤30	PASS
		2462	9.26	≤30	PASS
11G	Ant1	2412	7.15	≤30	PASS
		2437	7.87	≤30	PASS
		2462	8.06	≤30	PASS
11N20SISO	Ant1	2412	6.96	≤30	PASS
		2437	7.74	≤30	PASS
		2462	8.89	≤30	PASS
11N40SISO	Ant1	2422	7.41	≤30	PASS
		2437	8.79	≤30	PASS
		2452	7.76	≤30	PASS


Test Graphs

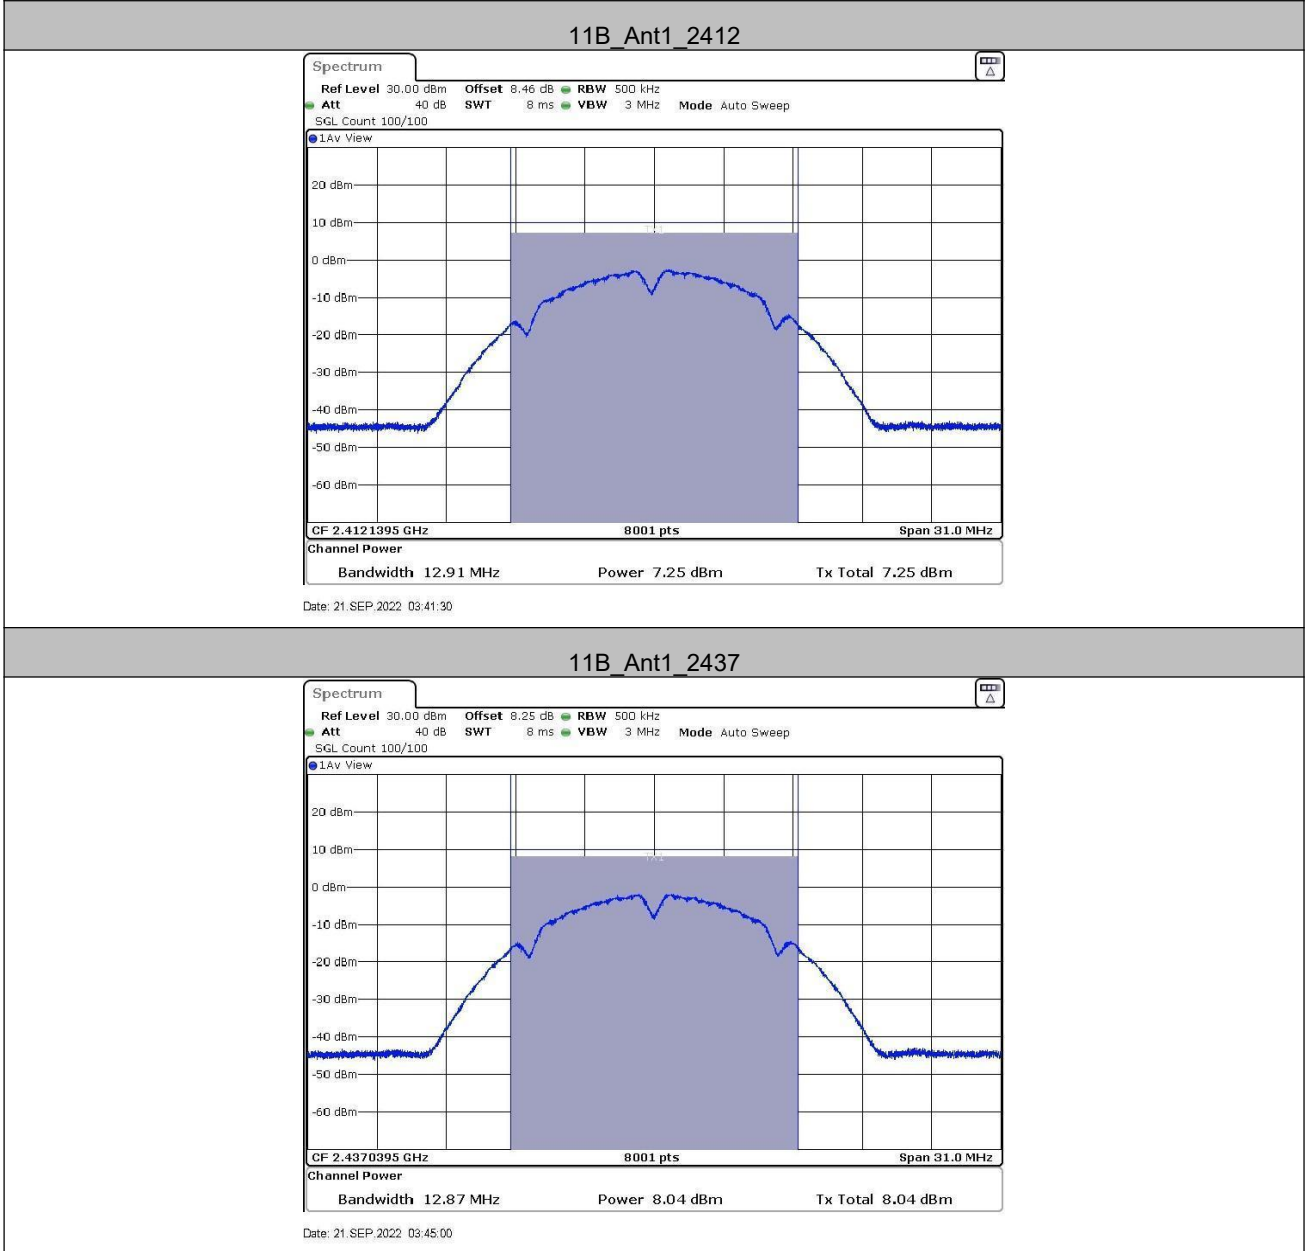

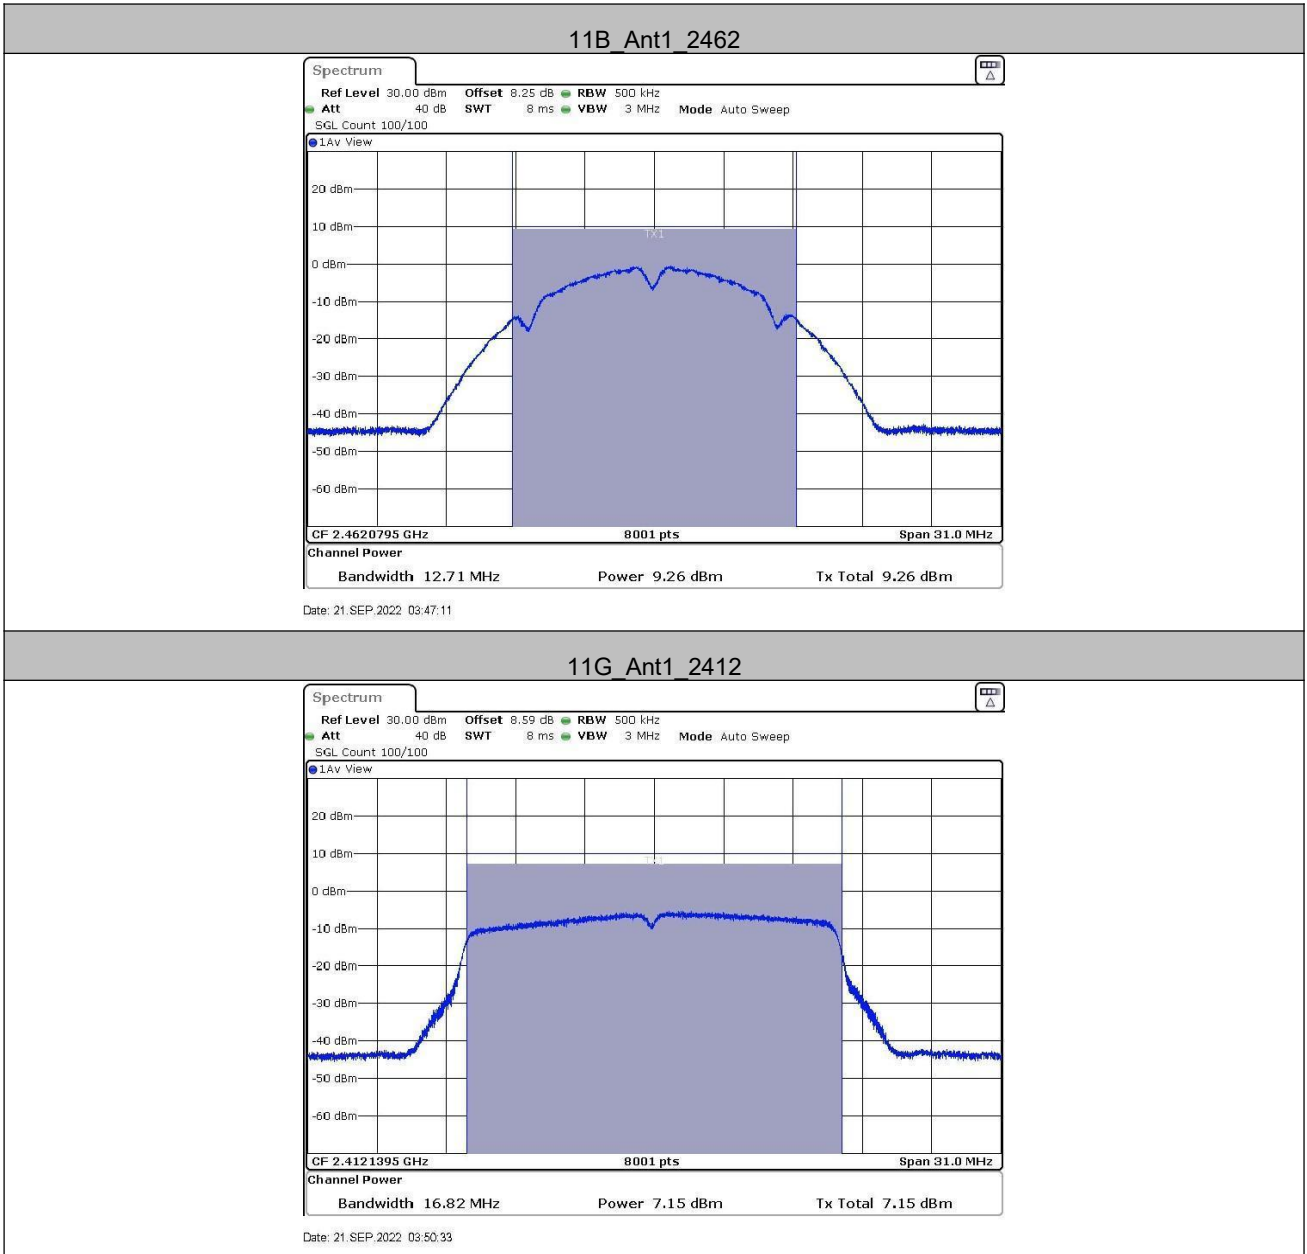


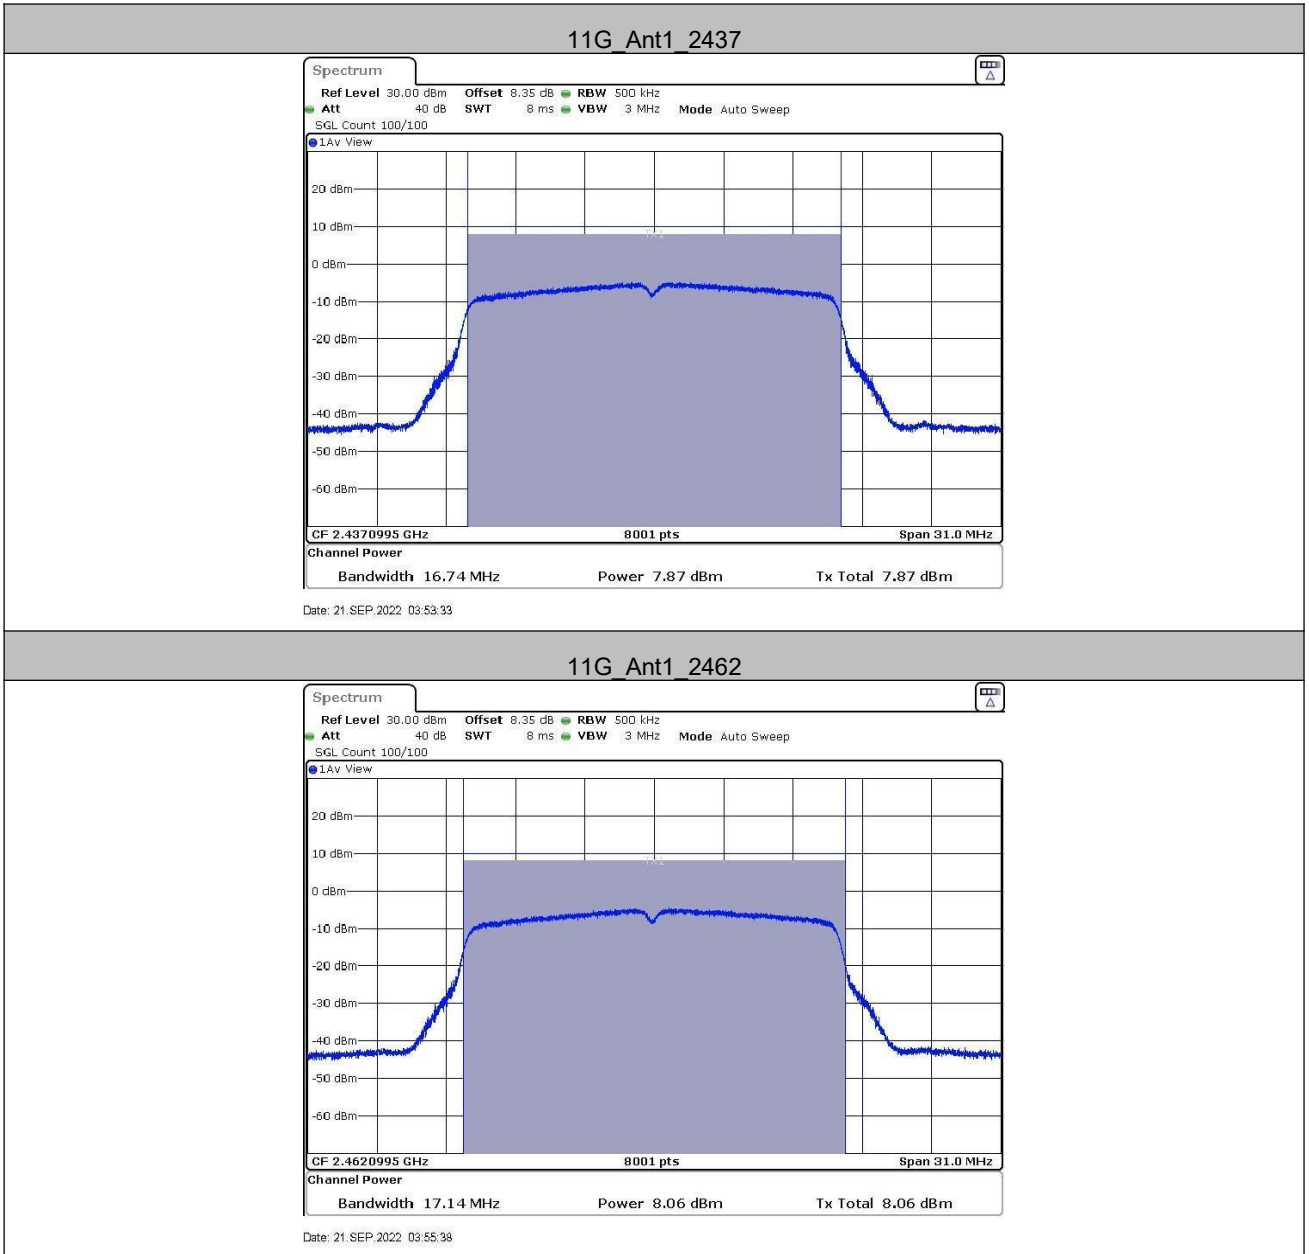

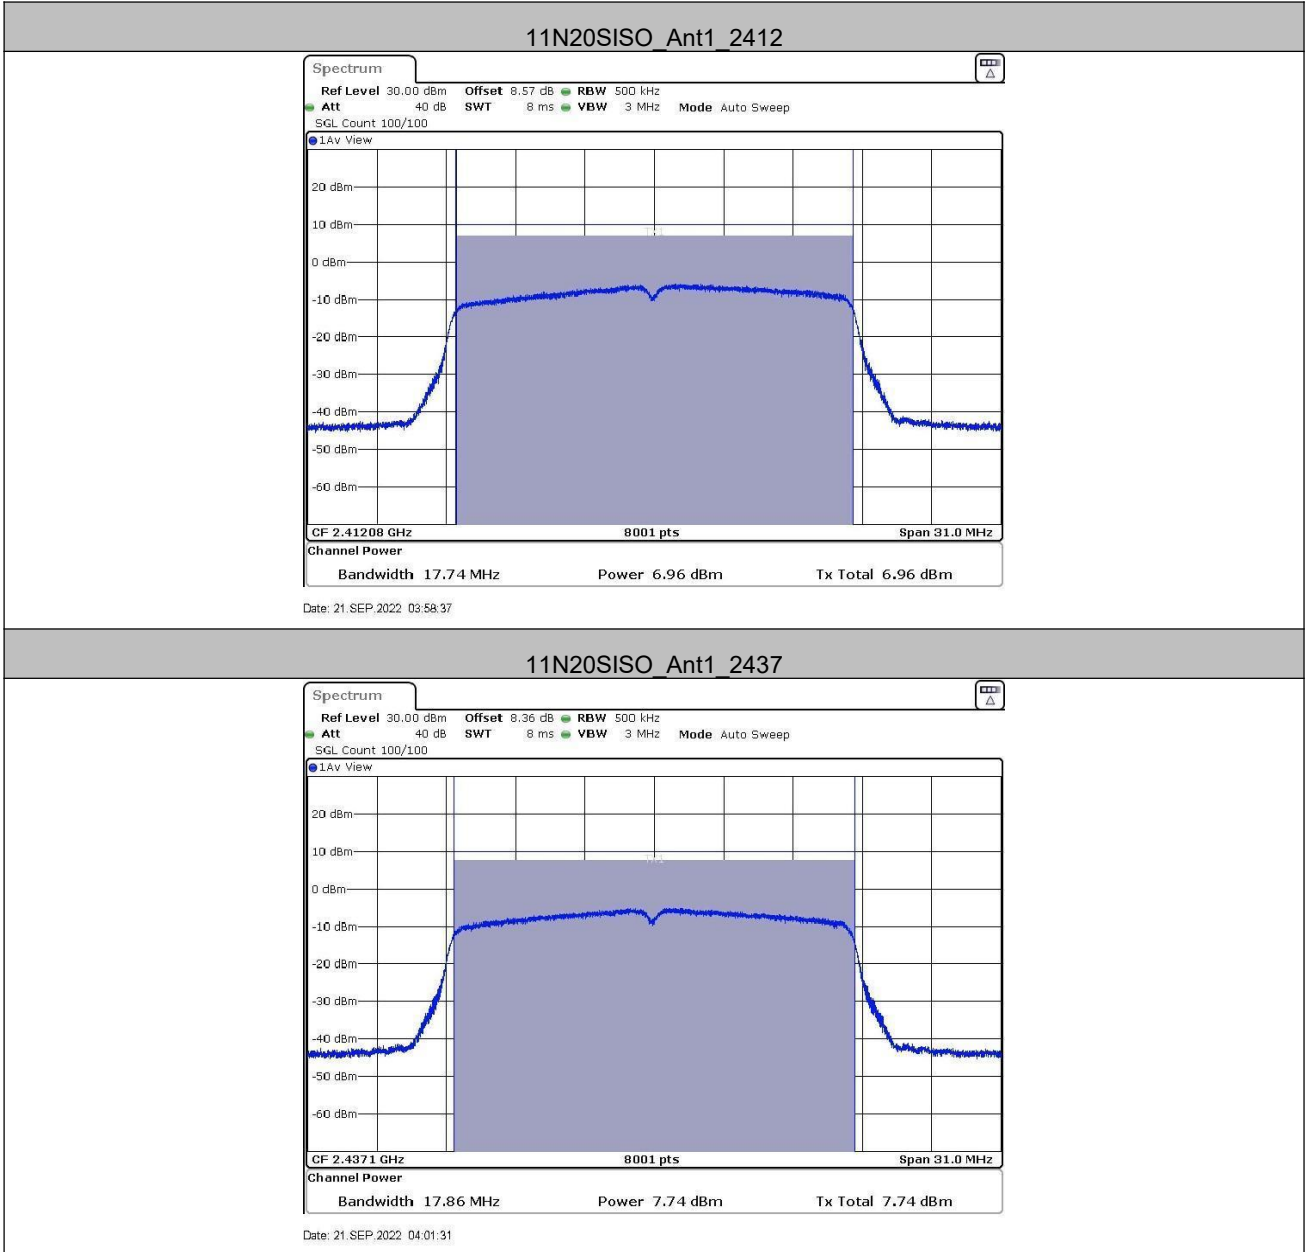

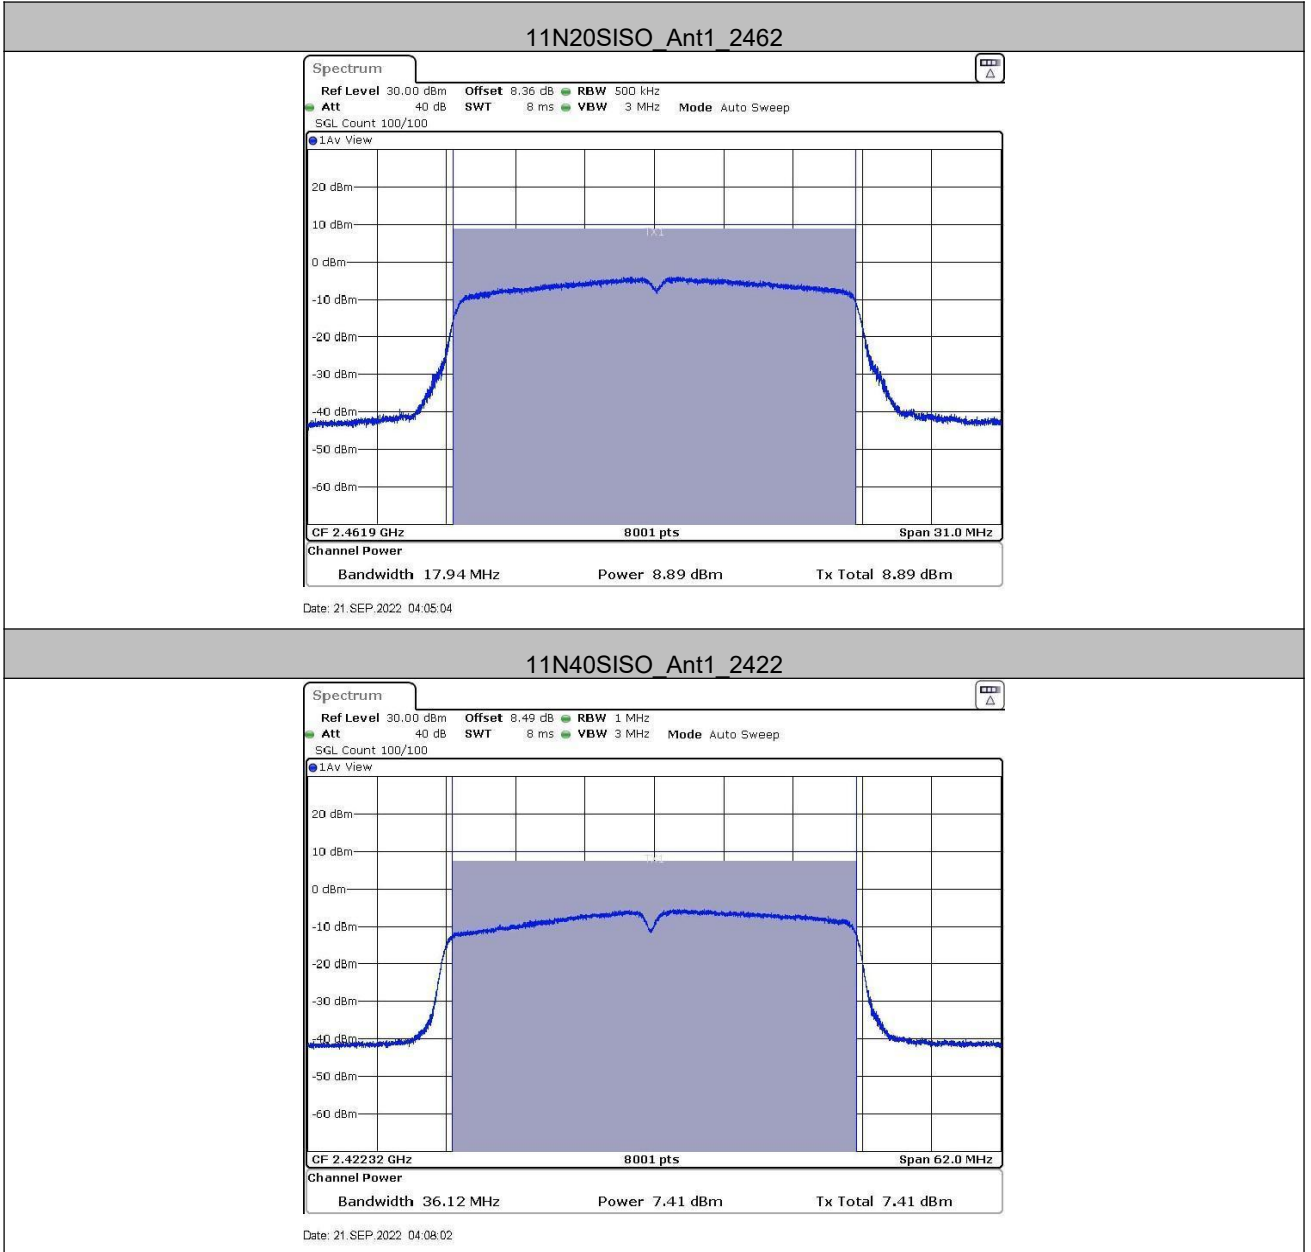


11N40SISO_Ant1_2437

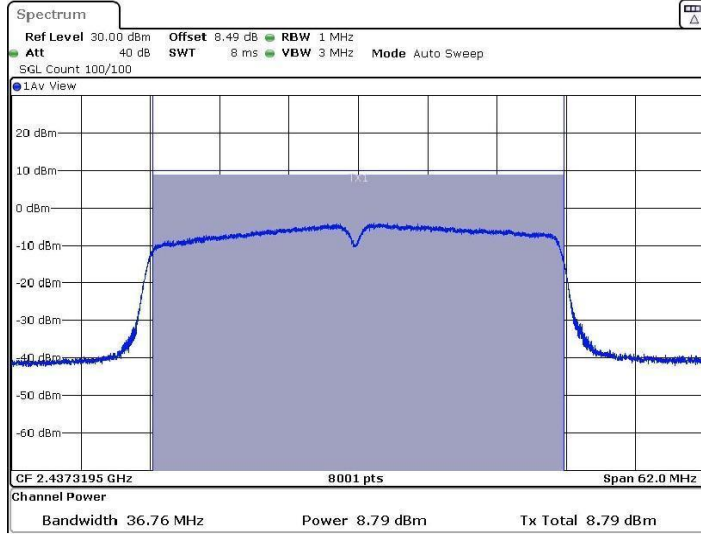


Date: 21.SEP.2022 04:11:10

11N40SISO_Ant1_2452

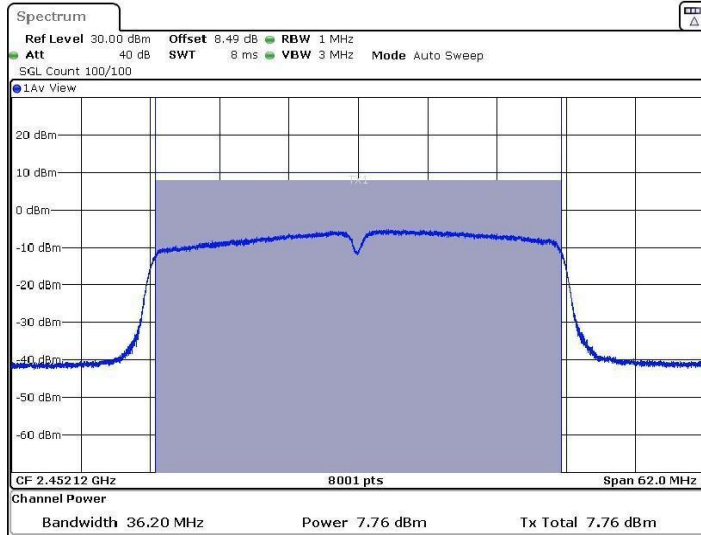

Date: 21.SEP.2022 04:13:28


5.4 6dB Occupy Bandwidth

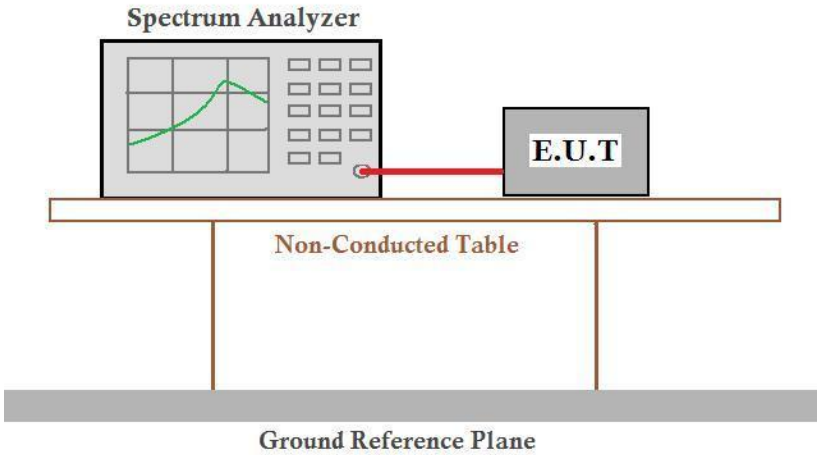
Test Requirement:	47 CFR Part 15C Section 15.247 (a)(2)
Test Method:	ANSI C63.10: 2013
Test Setup:	 <p>Offset=cable loss+ attenuation factor</p>
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40). Only the worst case is recorded in the report.
Limit:	≥ 500 kHz
Test Results:	Pass

Test Result

TestMode	Antenna	Channel	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	8.160	2408.400	2416.560	0.5	PASS
		2437	8.160	2432.920	2441.080	0.5	PASS
		2462	8.120	2457.960	2466.080	0.5	PASS
11G	Ant1	2412	15.400	2404.400	2419.800	0.5	PASS
		2437	16.400	2428.800	2445.200	0.5	PASS
		2462	16.400	2453.800	2470.200	0.5	PASS
11N20SISO	Ant1	2412	16.440	2404.400	2420.840	0.5	PASS
		2437	13.880	2430.640	2444.520	0.5	PASS
		2462	17.280	2453.560	2470.840	0.5	PASS
11N40SISO	Ant1	2422	31.440	2408.160	2439.600	0.5	PASS
		2437	32.720	2421.880	2454.600	0.5	PASS
		2452	35.840	2434.400	2470.240	0.5	PASS


Test Graphs

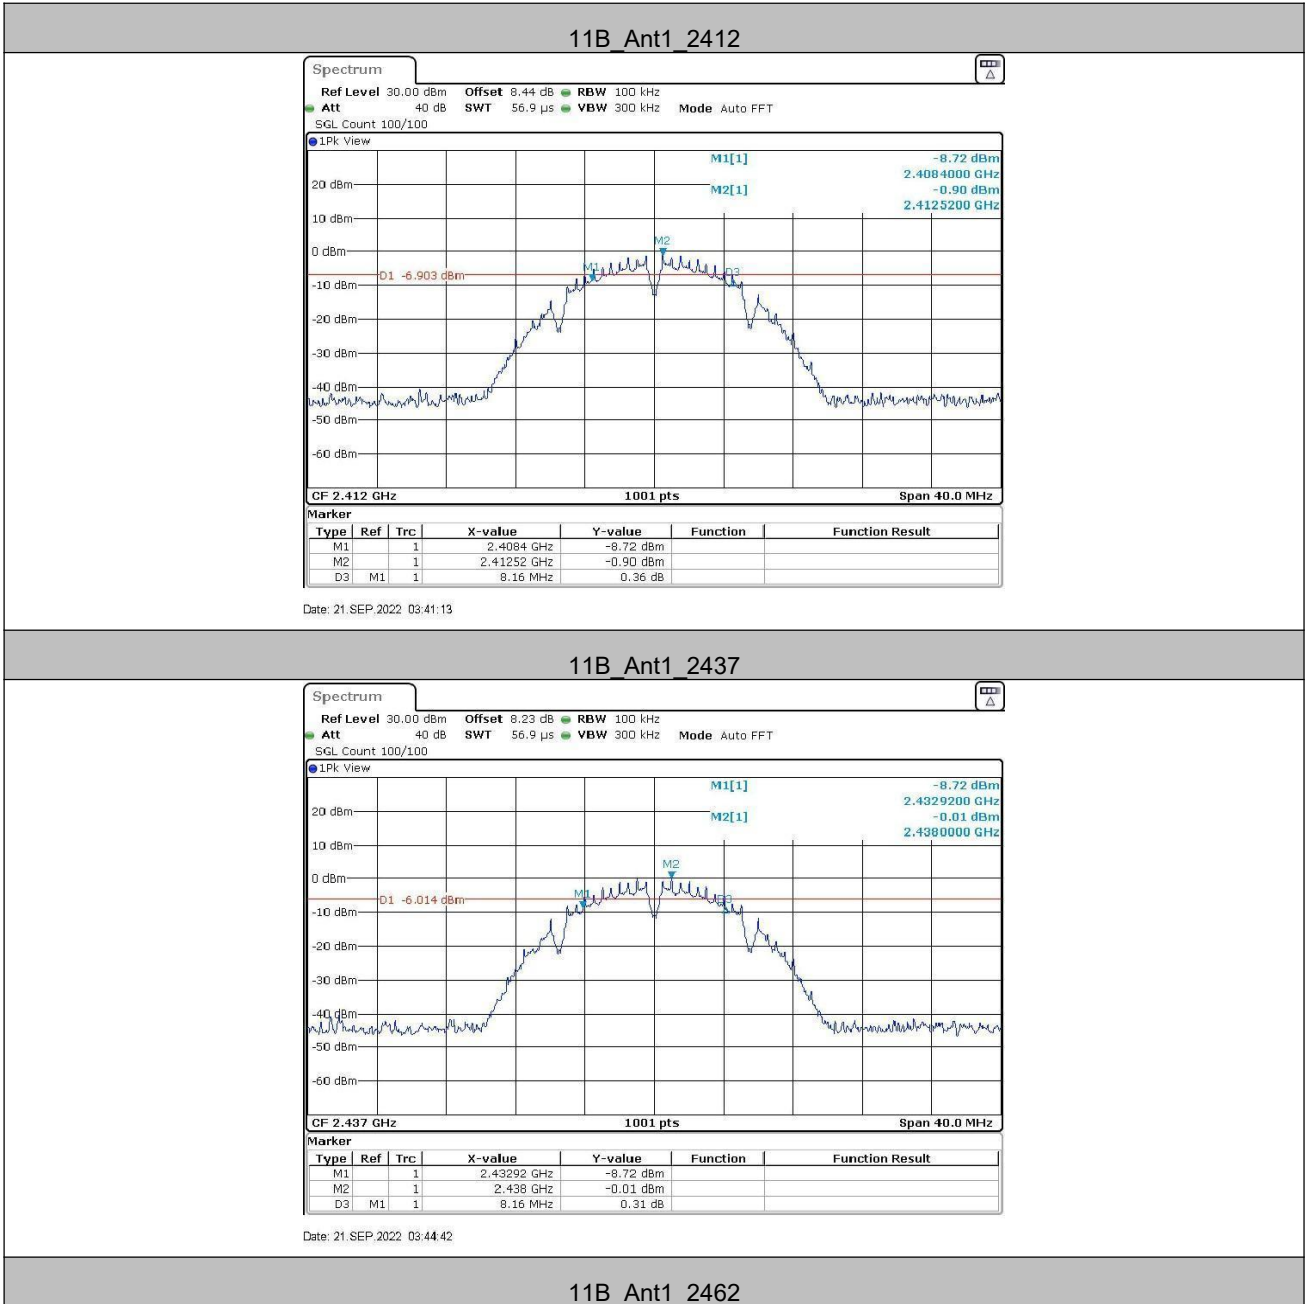

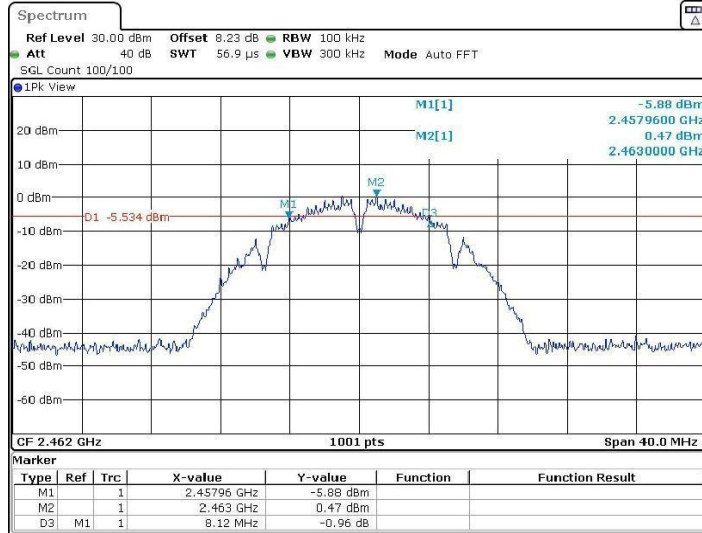


Date: 21.SEP.2022 03:46:54

11G_Ant1_2412

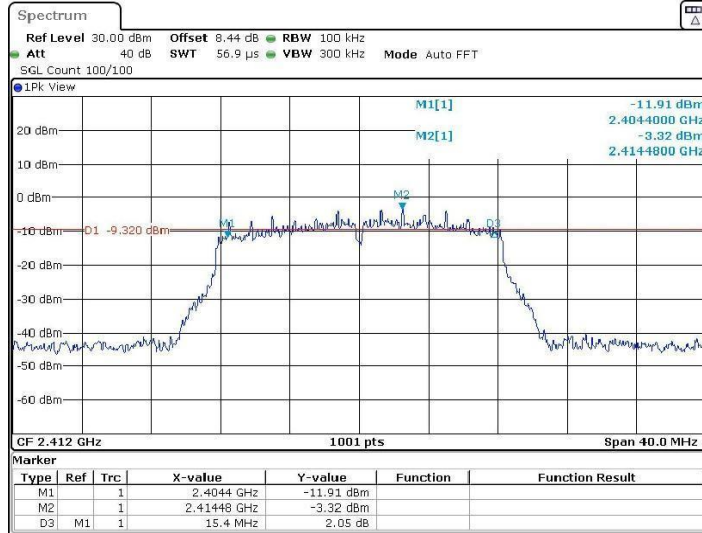


Date: 21.SEP.2022 03:50:15

11G_Ant1_2437

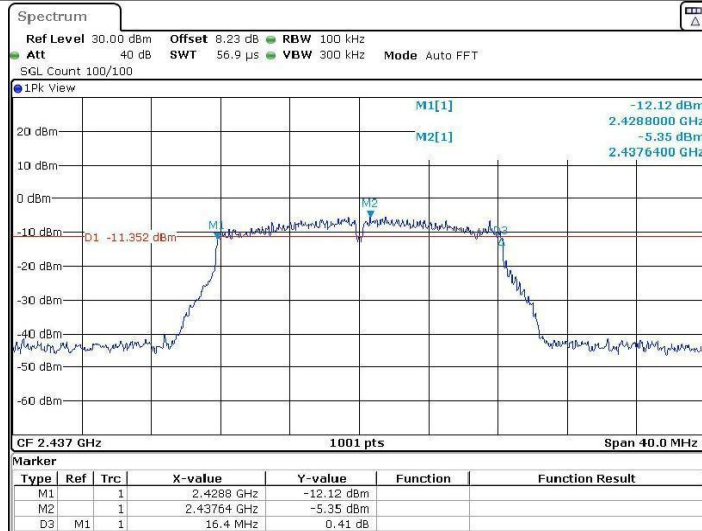


Date: 21.SEP.2022 03:53:15

11G_Ant1_2462

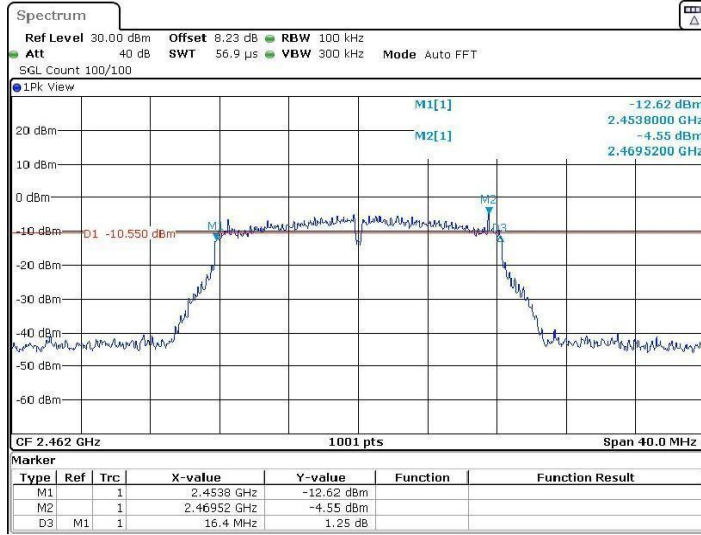


Date: 21.SEP.2022 03:55:21

11N20SISO_Ant1_2412

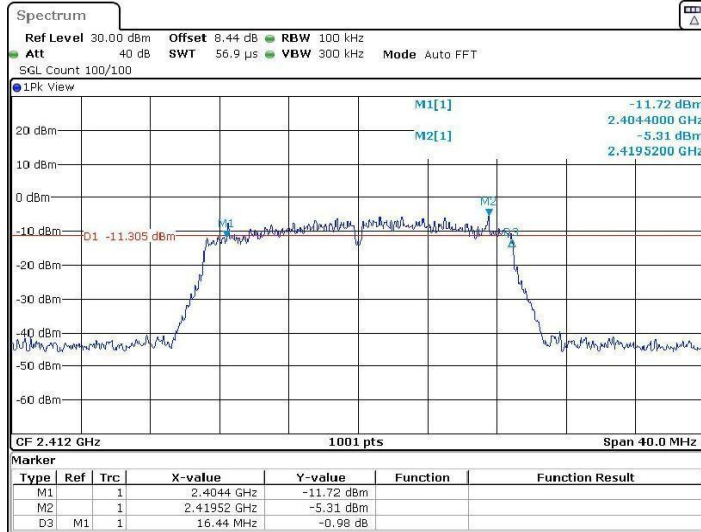


Date: 21.SEP.2022 03:58:20

11N20SISO_Ant1_2437

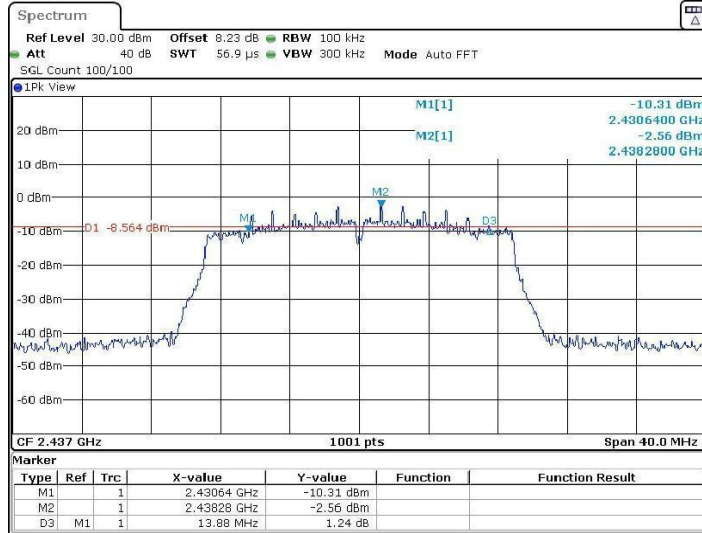


Date: 21.SEP.2022 04:01:13

11N20SISO_Ant1_2462

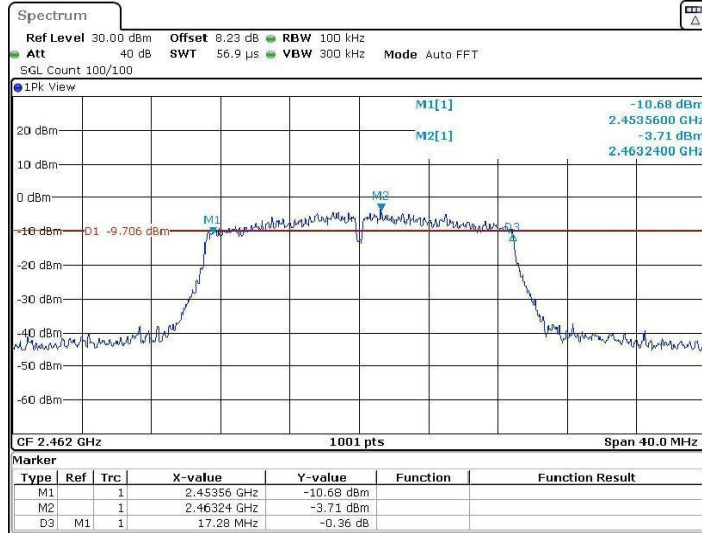


Date: 21.SEP.2022 04:04:47

11N40SISO_Ant1_2422

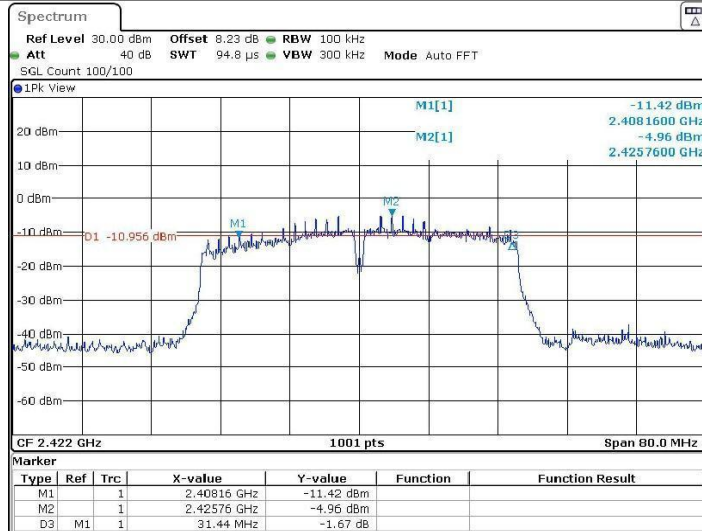


Date: 21.SEP.2022 04:07:44

11N40SISO_Ant1_2437

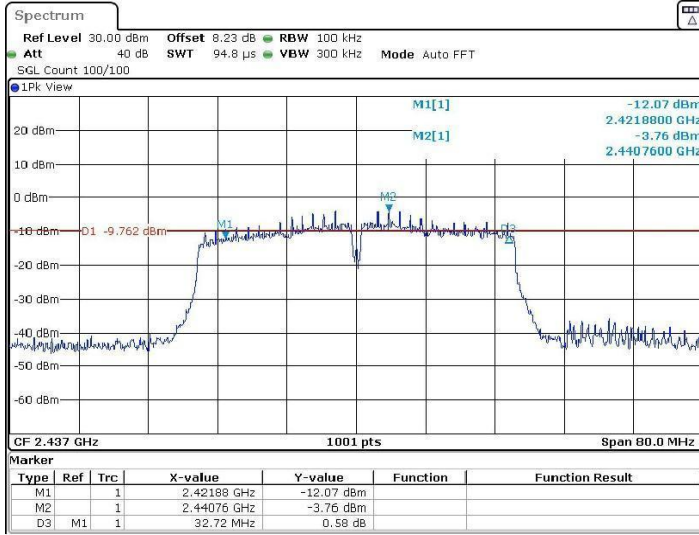


Date: 21.SEP.2022 04:10:53

11N40SISO_Ant1_2452

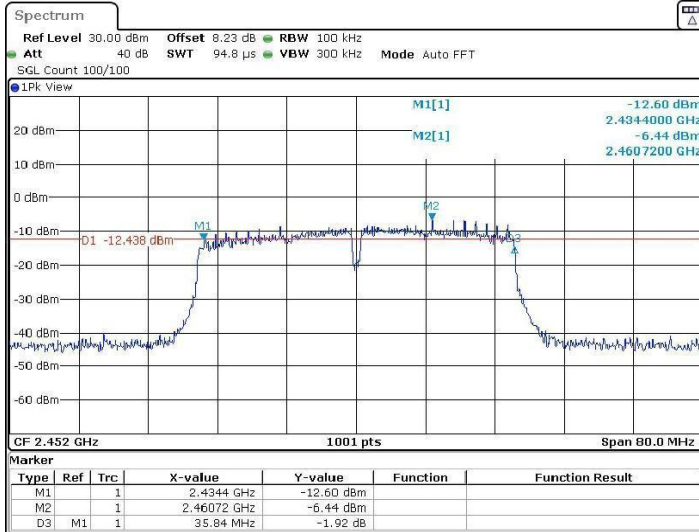

Date: 21.SEP.2022 04:13:10


5.5 Power Spectral Density

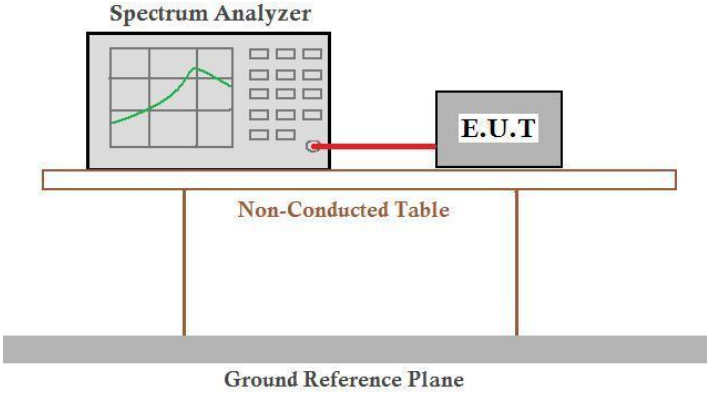
Test Requirement:	47 CFR Part 15C Section 15.247 (e)
Test Method:	ANSI C63.10: 2013
Test Setup:	 <p>Offset=cable loss+ attenuation factor</p>
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40). Only the worst case is recorded in the report.
Limit:	$\leq 8.00\text{dBm}/3\text{kHz}$
Test Results:	Pass

Test Result


TestMode	Antenna	Channel	Result[dBm/3-100kHz]	Limit[dBm/3kHz]	Verdict
11B	Ant1	2412	-23.58	≤8	PASS
		2437	-22.73	≤8	PASS
		2462	-17.48	≤8	PASS
11G	Ant1	2412	-22.25	≤8	PASS
		2437	-20.47	≤8	PASS
		2462	-24.77	≤8	PASS
11N20SISO	Ant1	2412	-22.38	≤8	PASS
		2437	-20.37	≤8	PASS
		2462	-23.58	≤8	PASS
11N40SISO	Ant1	2422	-22.65	≤8	PASS
		2437	-22.18	≤8	PASS
		2452	-25.4	≤8	PASS

Test Graphs

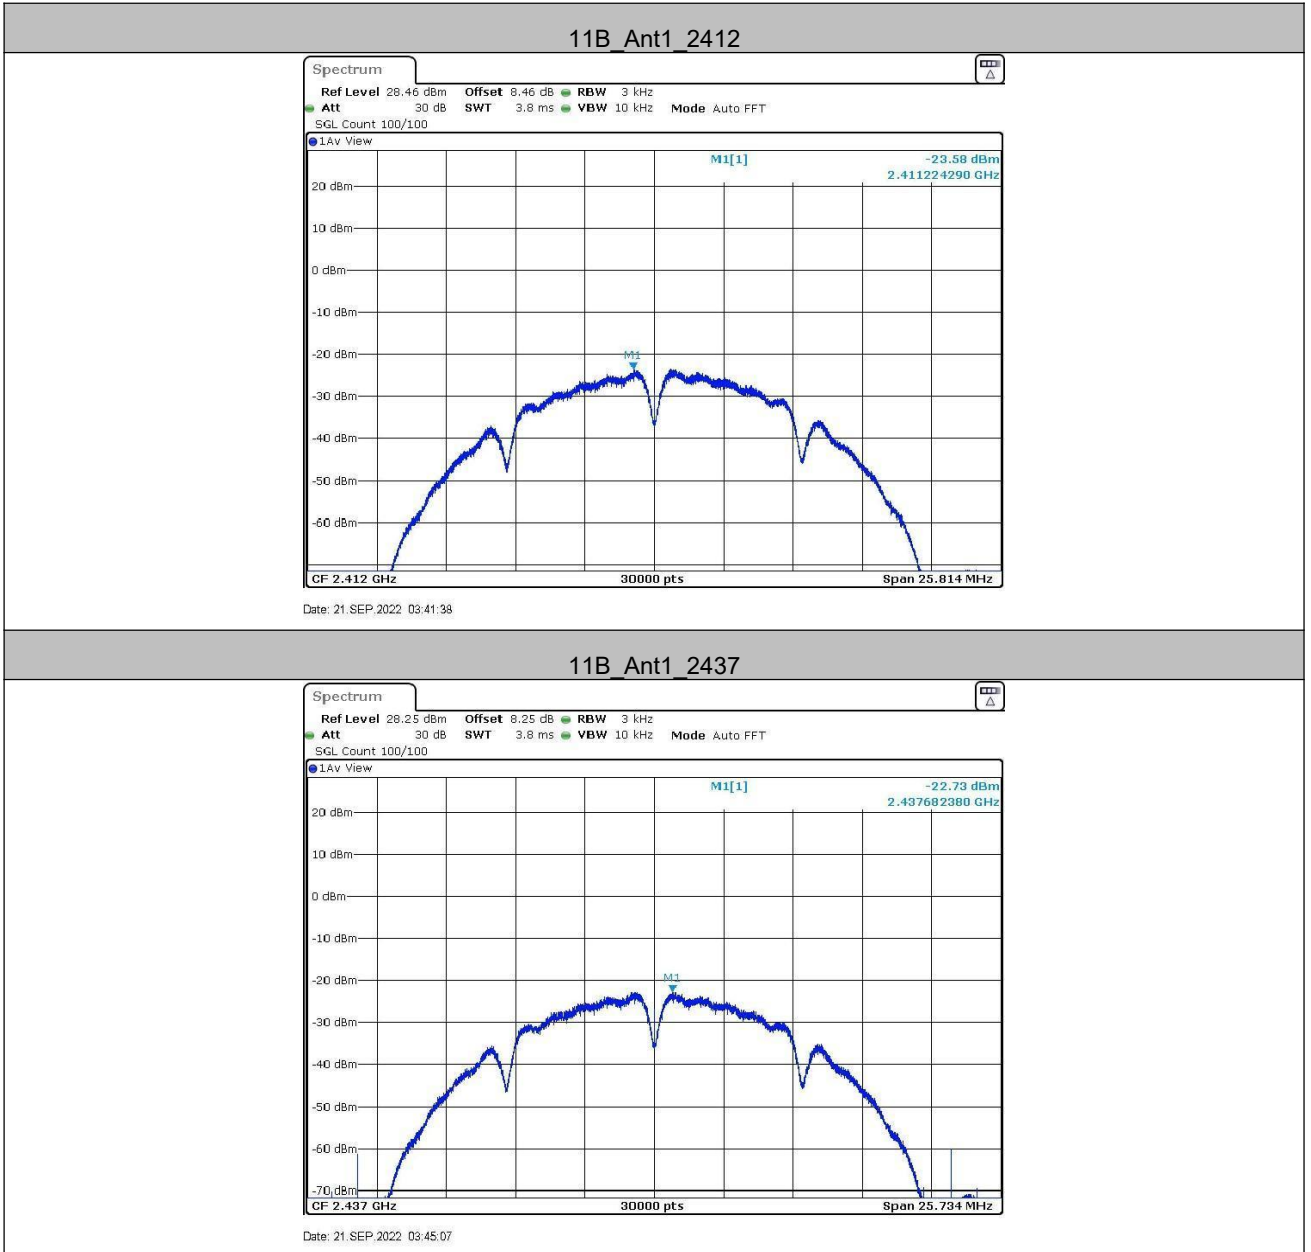


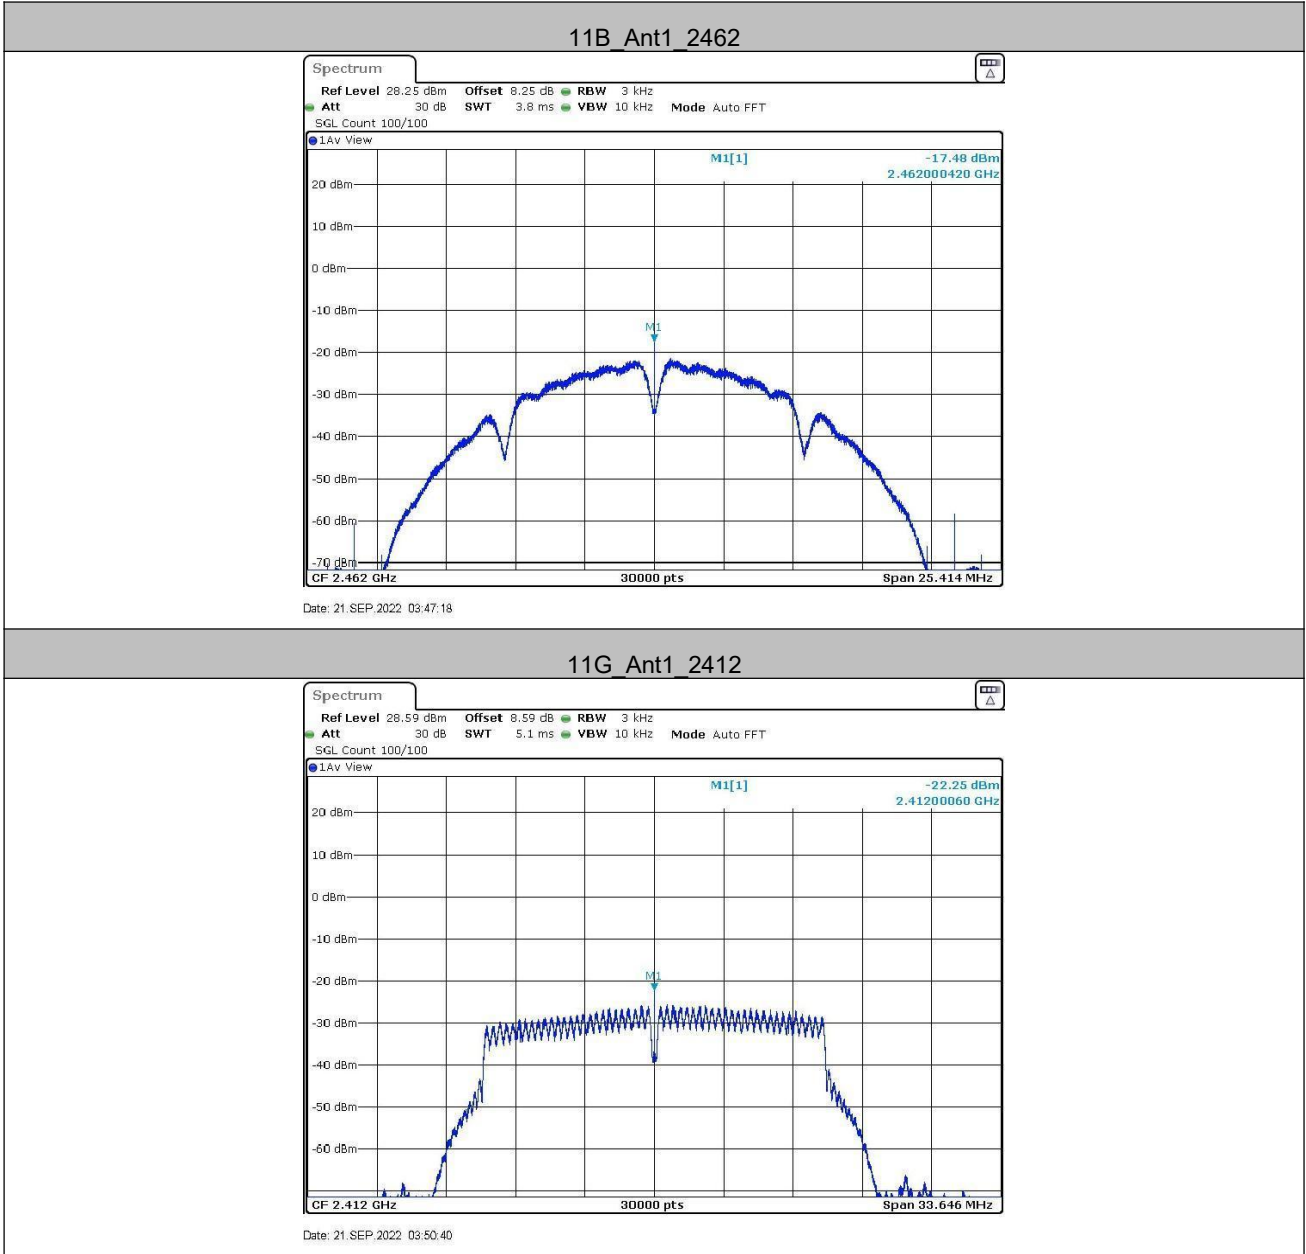


11G_Ant1_2437

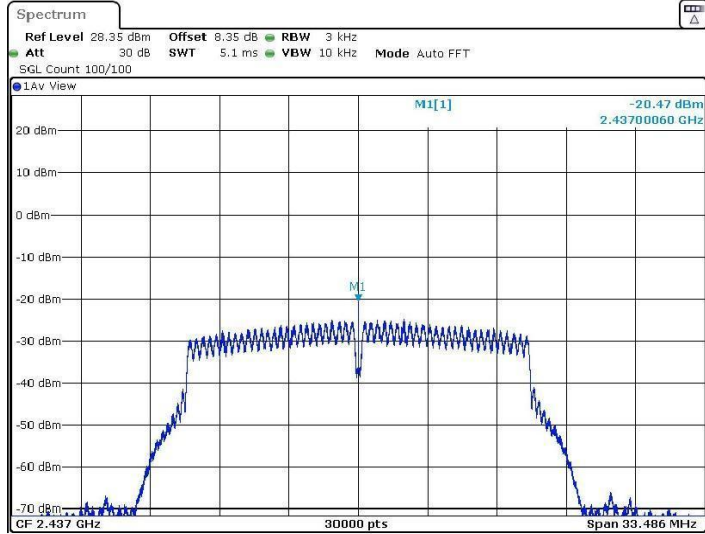

11G_Ant1_2462

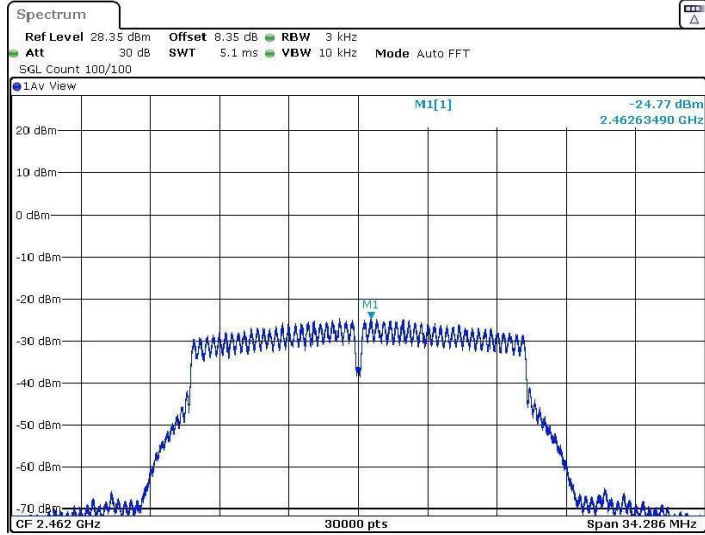


11N20SISO_Ant1_2412

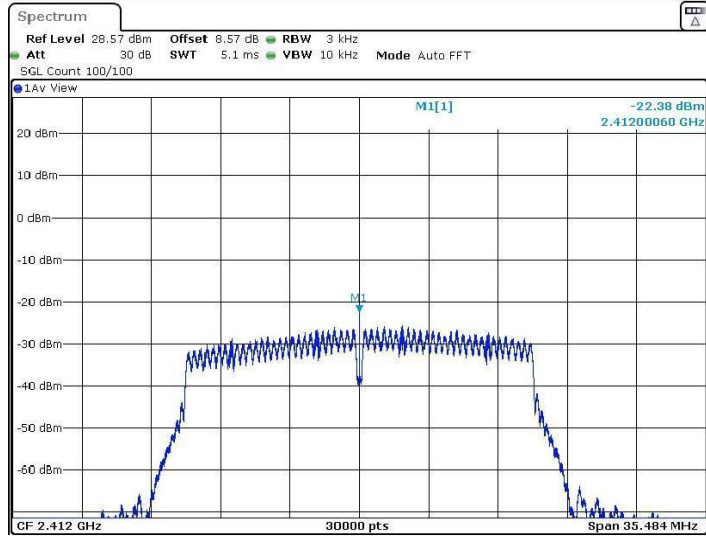


Date: 21.SEP.2022 03:58:44

11N20SISO_Ant1_2437

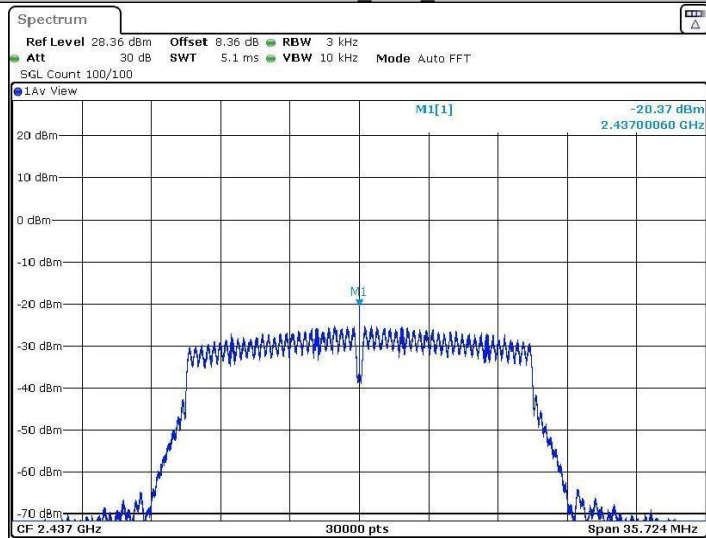



Date: 21.SEP.2022 04:01:38

11N20SISO Ant1_2462

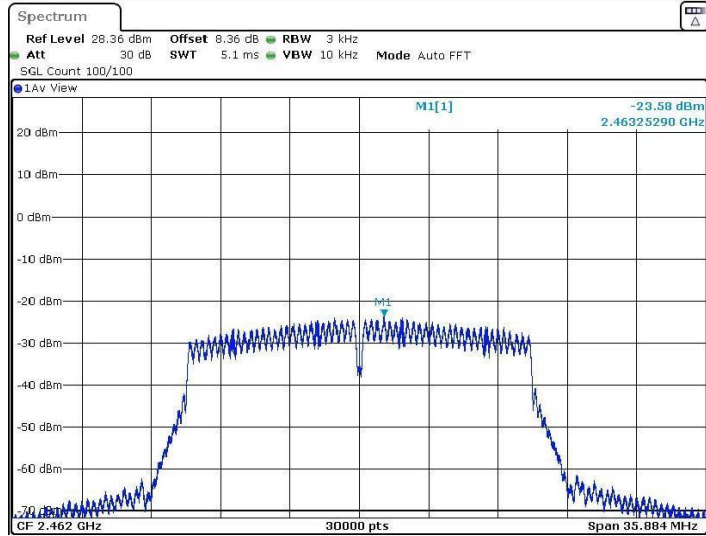


11N40SISO Ant1_2422

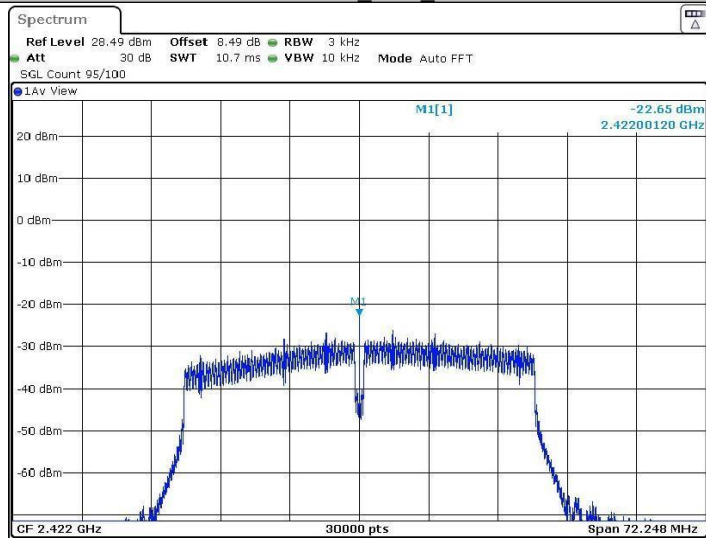

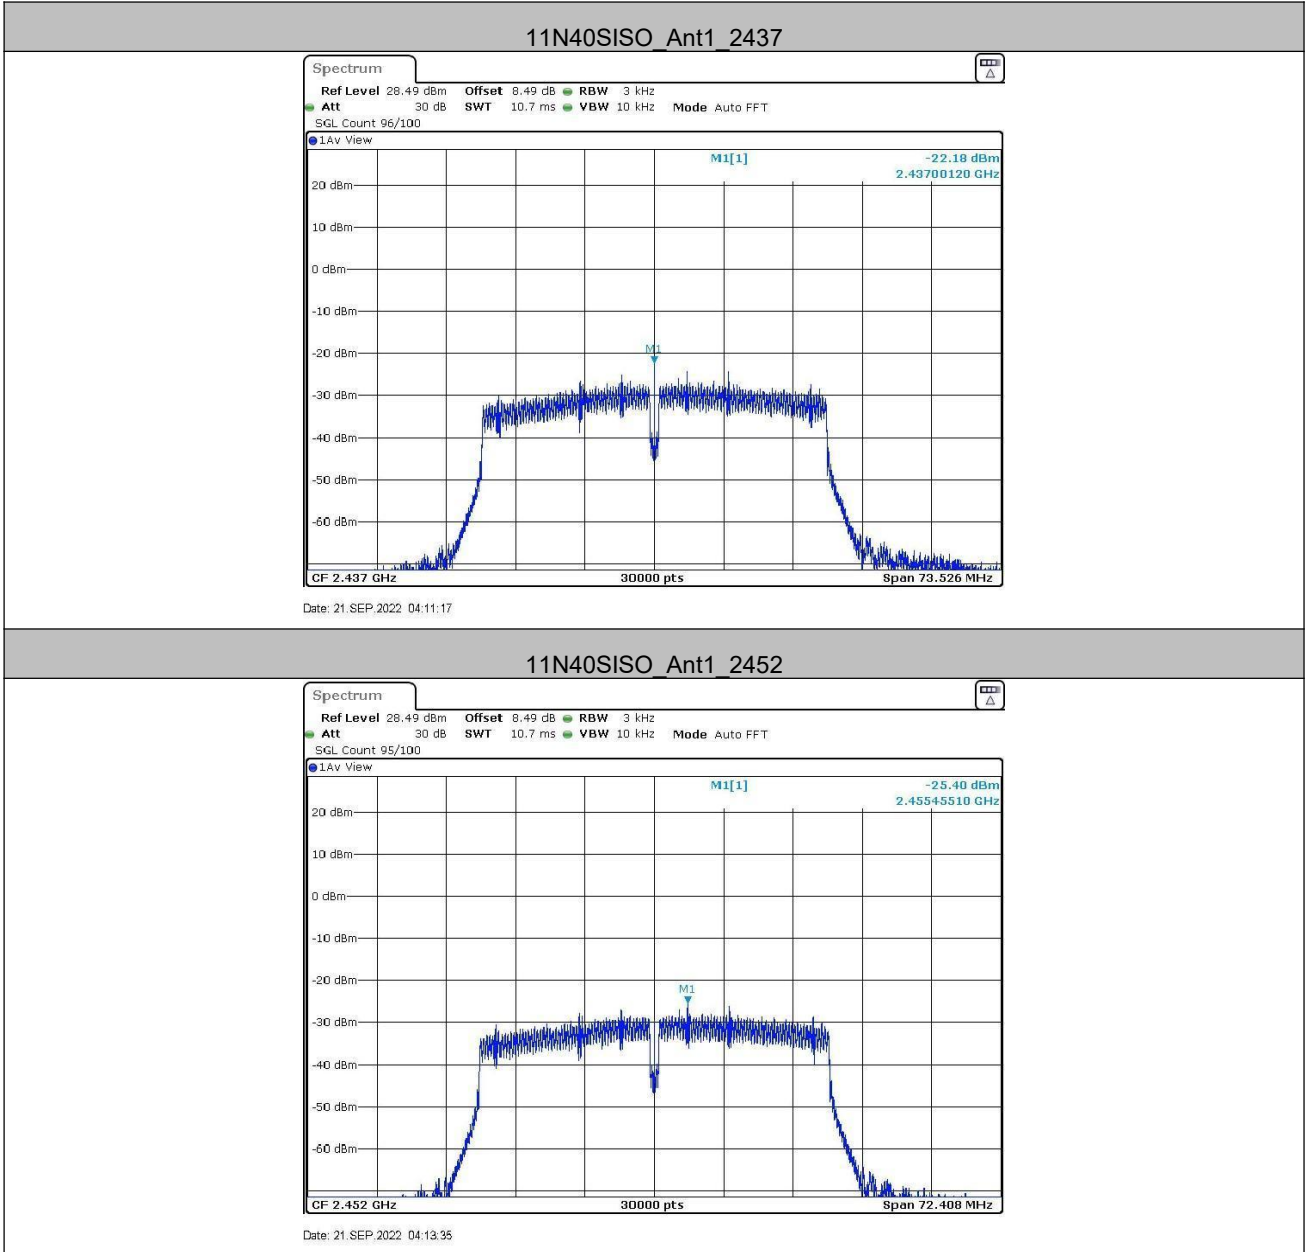


5.6 Band-edge for RF Conducted Emissions

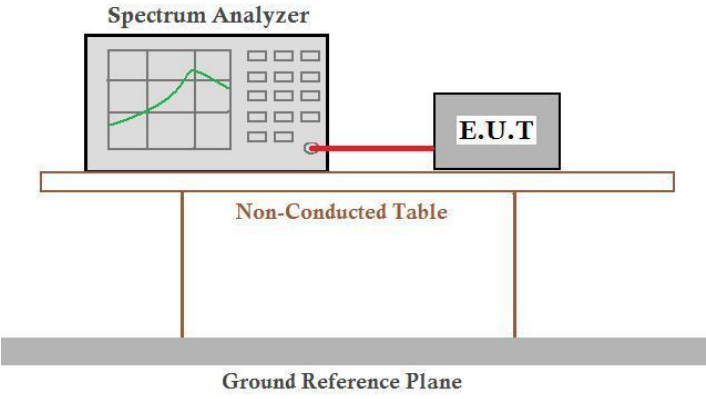
Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10: 2013
Test Setup:	 <p>Offset=cable loss+ attenuation factor</p>
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40). Only the worst case is recorded in the report.
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test Results:	Pass

Test Result


TestMode	Antenna	ChName	Channel	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
11B	Ant1	Low	2412	-1.25	-49.78	≤ -31.25	PASS
		High	2462	1.60	-49.16	≤ -28.4	PASS
11G	Ant1	Low	2412	-3.20	-46.71	≤ -33.2	PASS
		High	2462	-4.88	-49.06	≤ -34.88	PASS
11N20SISO	Ant1	Low	2412	-3.39	-44.57	≤ -33.39	PASS
		High	2462	-1.83	-49.05	≤ -31.83	PASS
11N40SISO	Ant1	Low	2422	-4.98	-45.12	≤ -34.98	PASS
		High	2452	-5.22	-44.57	≤ -35.22	PASS

5.6.1 Test Graphs

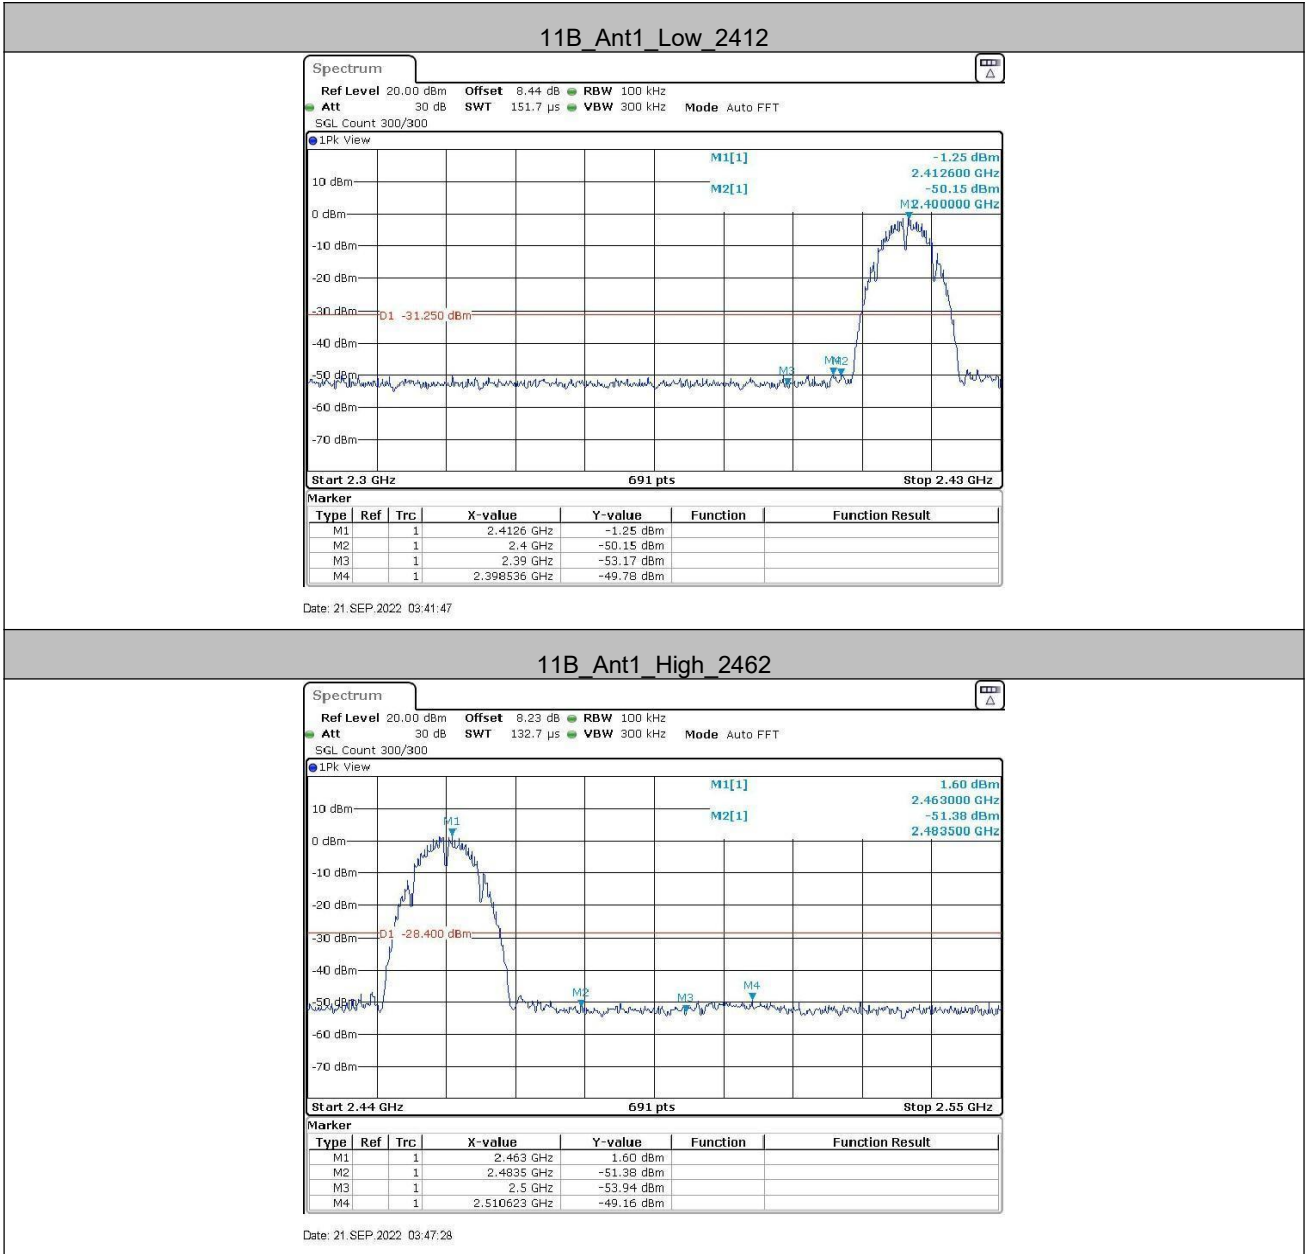

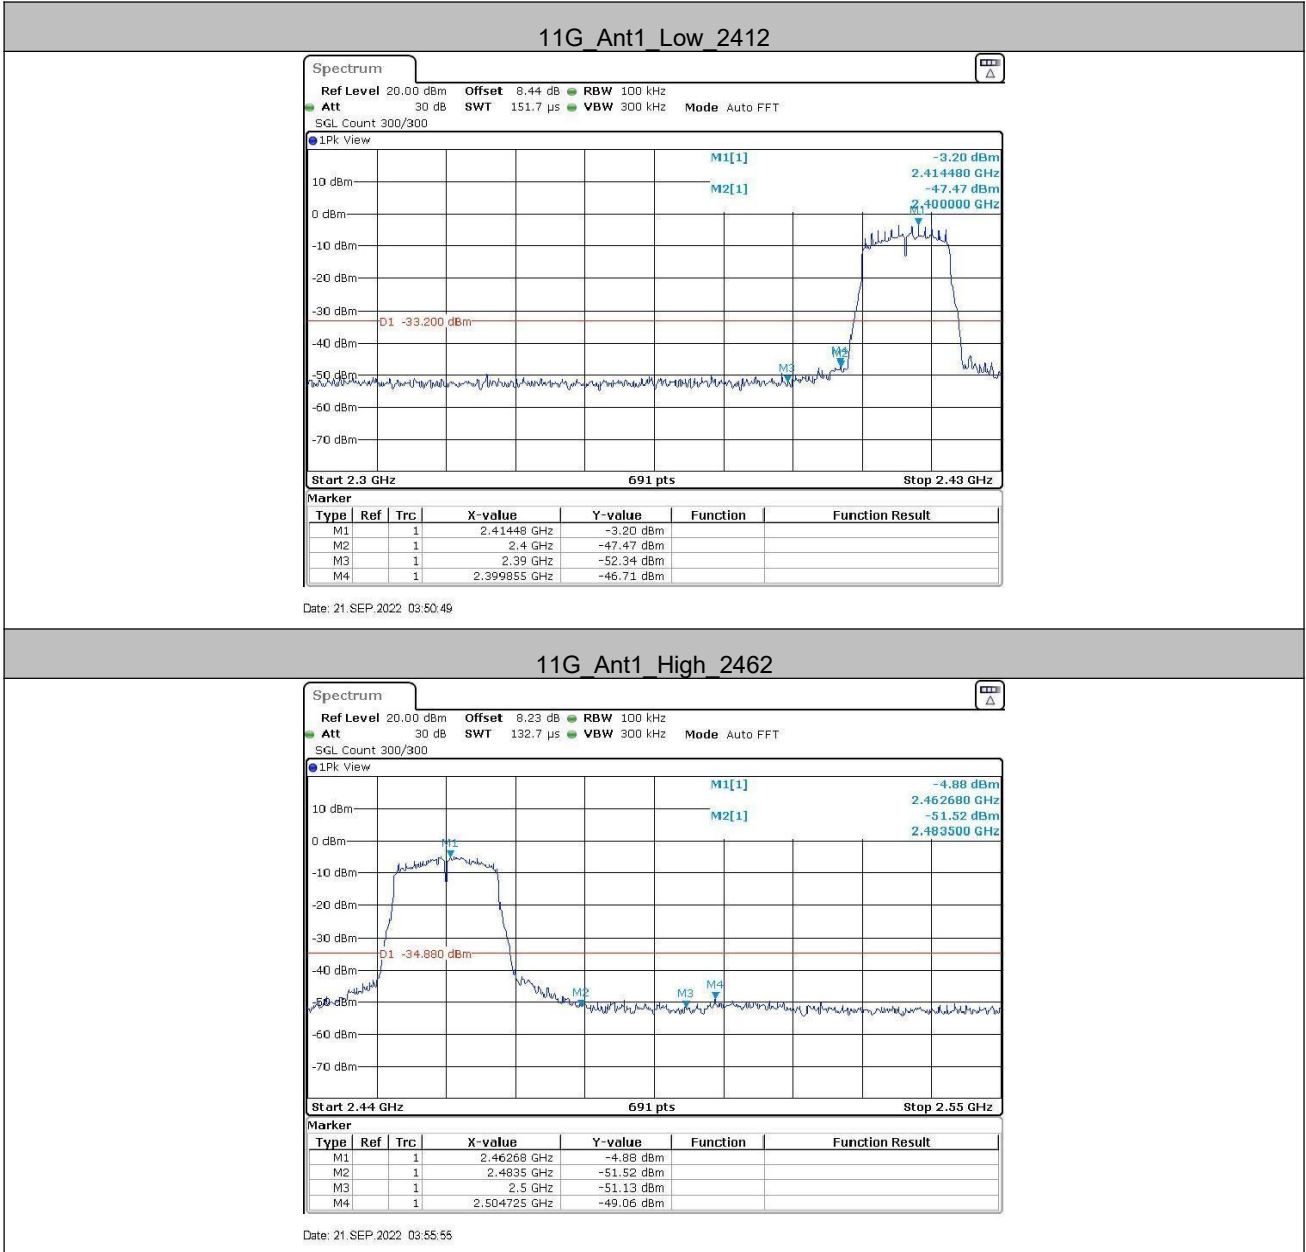


11N20SISO_Ant1_Low_2412

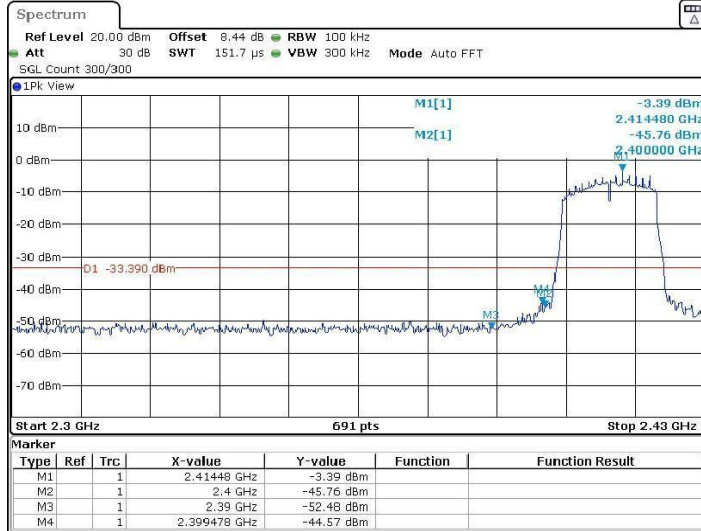


Date: 21.SEP.2022 03:58:55

11N20SISO_Ant1_High_2462

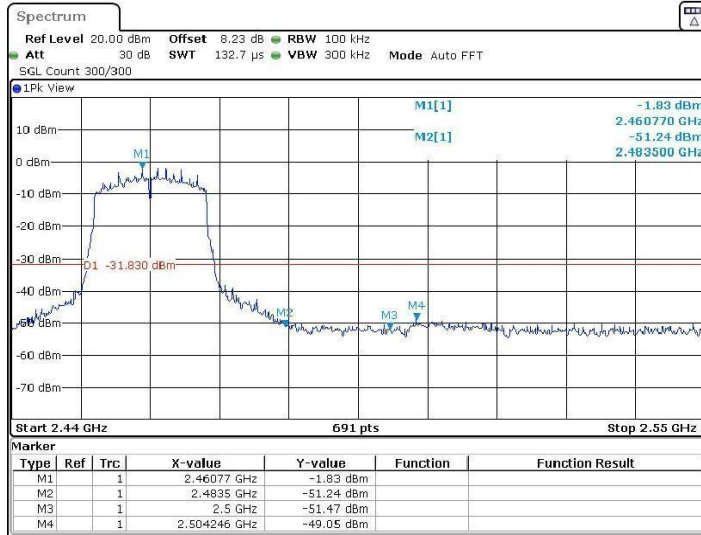


Date: 21.SEP.2022 04:05:21

11N40SISO_Ant1_Low_2422

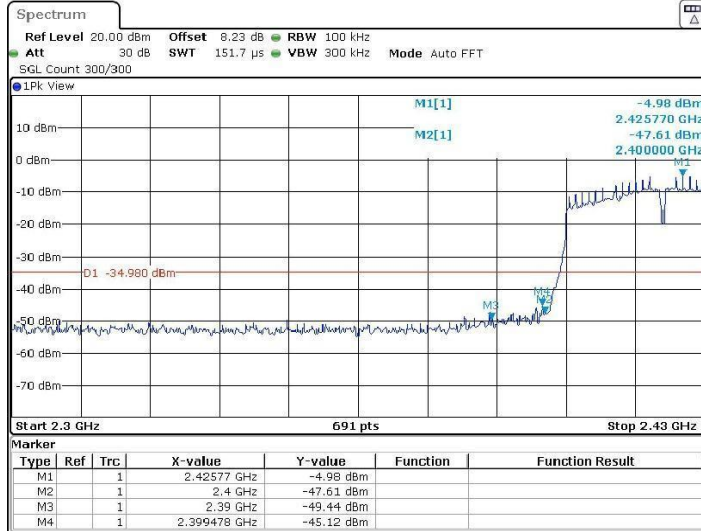


Date: 21.SEP.2022 04:08:19

11N40SISO_Ant1_High_2452

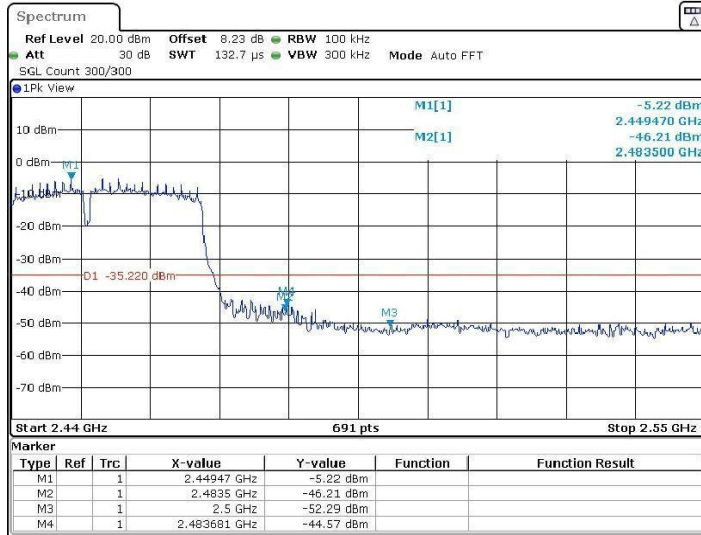

Date: 21.SEP.2022 04:13:45

5.7 RF Conducted Spurious Emissions

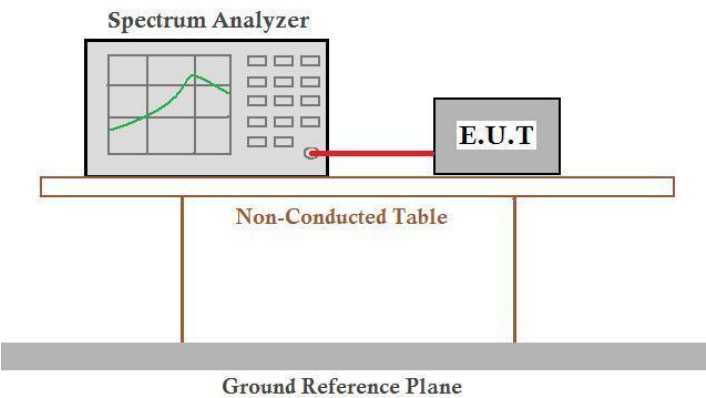Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10: 2013
Test Setup:	 <p>The diagram illustrates the test setup for RF conducted spurious emissions. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by two vertical legs. Below the table is a Ground Reference Plane, represented by a thick grey bar.</p> <p>Offset=cable loss+ attenuation factor</p>
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40). Only the worst case is recorded in the report.
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test Results:	Pass

Test Result

TestMode	Antenna	Channel	FreqRange [Mhz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
11B	Ant1	2412	Reference	-0.79	-0.79	---	PASS
			30~1000	-0.79	-58.29	≤-30.79	PASS
			1000~26500	-0.79	-55.29	≤-30.79	PASS
		2437	Reference	0.22	0.22	---	PASS
			30~1000	0.22	-59.31	≤-29.78	PASS
			1000~26500	0.22	-55.21	≤-29.78	PASS
		2462	Reference	1.22	1.22	---	PASS
			30~1000	1.22	-59.28	≤-28.78	PASS
			1000~26500	1.22	-55.08	≤-28.78	PASS
11G	Ant1	2412	Reference	-3.15	-3.15	---	PASS
			30~1000	-3.15	-58.64	≤-33.15	PASS
			1000~26500	-3.15	-54.56	≤-33.15	PASS
		2437	Reference	-2.68	-2.68	---	PASS
			30~1000	-2.68	-59.19	≤-32.68	PASS
			1000~26500	-2.68	-55.3	≤-32.68	PASS
		2462	Reference	-2.22	-2.22	---	PASS
			30~1000	-2.22	-59	≤-32.22	PASS
			1000~26500	-2.22	-54.97	≤-32.22	PASS
11N20SISO	Ant1	2412	Reference	-3.13	-3.13	---	PASS
			30~1000	-3.13	-58.99	≤-33.13	PASS
			1000~26500	-3.13	-54.09	≤-33.13	PASS
		2437	Reference	-2.62	-2.62	---	PASS
			30~1000	-2.62	-58.42	≤-32.62	PASS
			1000~26500	-2.62	-55.45	≤-32.62	PASS
		2462	Reference	-1.41	-1.41	---	PASS
			30~1000	-1.41	-58.98	≤-31.41	PASS
			1000~26500	-1.41	-55.56	≤-31.41	PASS
11N40SISO	Ant1	2422	Reference	-4.98	-4.98	---	PASS
			30~1000	-4.98	-59.35	≤-34.98	PASS
			1000~26500	-4.98	-55.2	≤-34.98	PASS
		2437	Reference	-3.85	-3.85	---	PASS
			30~1000	-3.85	-58.32	≤-33.85	PASS
			1000~26500	-3.85	-55.15	≤-33.85	PASS
		2452	Reference	-4.63	-4.63	---	PASS

			30~1000	-4.63	-59.16	≤-34.63	PASS
			1000~26500	-4.63	-55.26	≤-34.63	PASS

Test Graphs

