

<b>Prüfbericht-Nr.:</b> <i>Test report no.:</i>	<b>CN22OBY1 001</b>	<b>Auftrags-Nr.:</b> <i>Order no.:</i>	<b>168376481</b>	Seite 1 von 20 Page 1 of 20
<b>Kunden-Referenz-Nr.:</b> <i>Client reference no.:</i>	<b>N/A</b>	<b>Auftragsdatum:</b> <i>Order date:</i>	<b>2022-06-09</b>	
<b>Auftraggeber:</b> <i>Client:</i>	<b>Honeywell International Inc.</b> 12 Clintonville Road, Northford, CT 06472, United States			
<b>Prüfgegenstand:</b> <i>Test item:</i>	I/O Module			
<b>Bezeichnung / Typ-Nr.:</b> <i>Identification / Type no.:</i>	IQ5-IO-8DO-B, IQ5-IO-8DO-HOA-B			
<b>Auftrags-Inhalt:</b> <i>Order content:</i>	Test Report			
<b>Prüfgrundlage:</b> <i>Test specification:</i>	CFR47 FCC Part 15: Subpart C Section 15.247 RSS-247 Issue 2 February 2017 RSS-Gen Issue 5 March 2019			
<b>Wareneingangsdatum:</b> <i>Date of sample receipt:</i>	2022-06-09	Please refer to Photo Document		
<b>Prüfmuster-Nr.:</b> <i>Test sample no.:</i>	A003268712-005, 014 A003274086-019,023			
<b>Prüfzeitraum:</b> <i>Testing period:</i>	2022-06-13 – 2022-07-13			
<b>Ort der Prüfung:</b> <i>Place of testing:</i>	TÜV Rheinland (Shenzhen) Co., Ltd.			
<b>Prüflaboratorium:</b> <i>Testing laboratory:</i>	TÜV Rheinland (Shenzhen) Co., Ltd.			
<b>Prüfergebnis*:</b> <i>Test result*:</i>	Pass			
<b>geprüft von:</b> <i>tested by:</i>	<u><i>x Bell Hu</i></u>	<b>genehmigt von:</b> <i>authorized by:</i>	<u><i>XI Lin Lin</i></u>	
<b>Datum:</b> <i>Date:</i>	2022-07-20	<b>Ausstellungsdatum:</b> <i>Issue date:</i>	2022-07-20	
<b>Stellung / Position:</b>	Project Manager <small>Signed by: Bell Hu</small>	<b>Stellung / Position:</b>	Reviewer <small>Signed by: Lin Lin</small>	
<b>Sonstiges / Other:</b>	FCC ID: 2A8LT-IQ5IO8DOB IC: 1609A-IQ5IO8DOB, PMN: IQ5-IO-8DO-B, IQ5-IO-8DO-HOA-B HVIN: 601001			
<b>Zustand des Prüfgegenstandes bei Anlieferung:</b> <i>Condition of the test item at delivery:</i>	Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>			
* Legende:	1 = sehr gut P(ass) = entspricht o.g. Prüfgrundlage(n)	2 = gut F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	3 = befriedigend N/A = nicht anwendbar	4 = ausreichend N/T = nicht getestet
* Legend:	1 = very good P(ass) = passed a.m. test specification(s)	2 = good F(ail) = failed a.m. test specification(s)	3 = satisfactory N/A = not applicable	4 = sufficient N/T = not tested
<b>Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.</b> <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

v05

## **Test Summary**

**5.1.1 ANTENNA REQUIREMENT**

RESULT: *Pass*

**5.1.2 MAXIMUM PEAK CONDUCTED OUTPUT POWER**

RESULT: *Pass*

**5.1.3 CONDUCTED POWER SPECTRAL DENSITY**

RESULT: *Pass*

**5.1.4 6DB BANDWIDTH**

RESULT: *Pass*

**5.1.5 99% BANDWIDTH**

RESULT: *Pass*

**5.1.6 CONDUCTED SPURIOUS EMISSIONS MEASURED IN 100 KHZ BANDWIDTH**

RESULT: *Pass*

**5.1.7 RADIATED SPURIOUS EMISSION**

RESULT: *Pass*

**5.1.8 CONDUCTED EMISSION ON AC MAINS**

RESULT: *Pass*

## Contents

<b>1</b>	<b>GENERAL REMARKS .....</b>	<b>4</b>
<b>1.1</b>	<b>COMPLEMENTARY MATERIALS .....</b>	<b>4</b>
<b>2</b>	<b>TEST SITES .....</b>	<b>5</b>
<b>2.1</b>	<b>TEST FACILITIES .....</b>	<b>5</b>
<b>2.2</b>	<b>LIST OF TEST AND MEASUREMENT INSTRUMENTS.....</b>	<b>5</b>
<b>2.3</b>	<b>TRACEABILITY .....</b>	<b>6</b>
<b>2.4</b>	<b>CALIBRATION .....</b>	<b>6</b>
<b>2.5</b>	<b>MEASUREMENT UNCERTAINTY.....</b>	<b>6</b>
<b>2.6</b>	<b>LOCATION OF ORIGINAL DATA.....</b>	<b>6</b>
<b>2.7</b>	<b>STATUS OF FACILITY USED FOR TESTING.....</b>	<b>6</b>
<b>3</b>	<b>GENERAL PRODUCT INFORMATION .....</b>	<b>7</b>
<b>3.1</b>	<b>PRODUCT FUNCTION AND INTENDED USE.....</b>	<b>7</b>
<b>3.2</b>	<b>RATINGS AND SYSTEM DETAILS .....</b>	<b>7</b>
<b>3.3</b>	<b>INDEPENDENT OPERATION MODES .....</b>	<b>8</b>
<b>3.4</b>	<b>NOISE GENERATING AND NOISE SUPPRESSING PARTS.....</b>	<b>8</b>
<b>3.5</b>	<b>SUBMITTED DOCUMENTS.....</b>	<b>8</b>
<b>4</b>	<b>TEST SET-UP AND OPERATION MODES .....</b>	<b>9</b>
<b>4.1</b>	<b>PRINCIPLE OF CONFIGURATION SELECTION .....</b>	<b>9</b>
<b>4.2</b>	<b>TEST OPERATION AND TEST SOFTWARE.....</b>	<b>9</b>
<b>4.3</b>	<b>SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT.....</b>	<b>9</b>
<b>4.4</b>	<b>COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....</b>	<b>9</b>
<b>4.5</b>	<b>TEST SETUP DIAGRAM.....</b>	<b>10</b>
<b>5</b>	<b>TEST RESULTS .....</b>	<b>12</b>
<b>5.1</b>	<b>TRANSMITTER REQUIREMENT &amp; TEST SUITES .....</b>	<b>12</b>
<b>5.1.1</b>	<i>Antenna Requirement .....</i>	<i>12</i>
<b>5.1.2</b>	<i>Maximum Peak Conducted Output Power.....</i>	<i>13</i>
<b>5.1.3</b>	<i>Conducted Power Spectral Density .....</i>	<i>14</i>
<b>5.1.4</b>	<i>6dB Bandwidth .....</i>	<i>15</i>
<b>5.1.5</b>	<i>99% Bandwidth .....</i>	<i>16</i>
<b>5.1.6</b>	<i>Conducted Spurious Emissions Measured in 100 kHz Bandwidth .....</i>	<i>17</i>
<b>5.1.7</b>	<i>Radiated Spurious Emission .....</i>	<i>18</i>
<b>5.1.8</b>	<i>Conducted Emission on AC Mains.....</i>	<i>19</i>
<b>6</b>	<b>PHOTOGRAPHS OF THE TEST SET-UP.....</b>	<b>20</b>
<b>7</b>	<b>LIST OF TABLES.....</b>	<b>20</b>

# 1 General Remarks

## 1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A: Photographs of the Test Set-up

Appendix B: Test Results of Bluetooth Low energy

## 2 Test Sites

### 2.1 Test Facilities

**TÜV Rheinland (Shenzhen) Co., Ltd.**

No. 362 Huanguan Road Middle, Longhua District, 518110, Shenzhen, P. R. China.

FCC Registration No.: 694916

IC Registration No.: 25069 and the CAB identifier is CN0078.

### 2.2 List of Test and Measurement Instruments

**Table 1: List of Test and Measurement Equipment**

<b>Radio Spectrum Testing (TS8997)</b>				
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model</b>	<b>Serial No.</b>	<b>Cal. until</b>
Signal Analyzer	R&S	FSV 40	101441	2022-08-09
OSP	R&S	OSP 150	101017	2022-12-02
Control PC	DELL	OptiPlex 7050	FTJZ9P2	N/A
Test Software	R&S	WMS32 (V11.00.00)	N/A	N/A
Power Meter	R&S	NRP2	107105	2022-12-02
Wideband Power Sensor	R&S	NRP-Z81	105677	2022-08-09
Shielding Room 8#	Albatross	SR8	APC17151-SR8	2024-06-22
<b>Unwanted Emission Testing (TS9975)</b>				
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model</b>	<b>Serial No.</b>	<b>Cal. until</b>
EMI Test Receiver	R&S	ESR 7	102021	2022-08-10
Signal Analyzer	R&S	FSV 40	101439	2022-08-09
System Controller Interface	R&S	SCI-100	S10010038	N/A
Filterbank	R&S	Wlan	100759	2022-08-09
OSP	R&S	OSP 120	102040	N/A
Pre-amplifier	R&S	SCU08F1	08320031	2022-08-09
Amplifier	R&S	SCU-18F	180070	2022-08-09
Amplifier	R&S	SCU40A	100475	2022-08-09
Trilog Broadband Antenna (30 MHz - 7 GHz)	Schwarzbeck	VULB 9162	193	2022-08-08
Double-Ridged Antenna (1 -18 GHz)	ETS-LINDGREN	3117	00218717	2022-08-08
Wideband Ridged Horn Antenna (18-40 GHz)	Steatite	QMS-00880	19067	2022-08-08
Active Loop Antenna	Schwarzbeck	FMZB 1513	302	2022-09-13
Test software	R&S	EMC32 (V10.60.10)	N/A	N/A
Control PC	Dell	OptiPlex 7050	36NV9P2	N/A

**Prüfbericht - Nr.: CN22OBY1 001**  
*Test Report No.:*

 Seite 6 von 20  
 Page 6 of 20

3m Semi-Anechoic Chamber	Albatross	SAC-3m	APC17151-SAC	2024-06-22
--------------------------	-----------	--------	--------------	------------

Conducted Emission				
Equipment	Manufacturer	Model No.	Serial No.	Cal. Until
EMI Test Receiver	R&S	ESR3	102428	2022-08-10
Artificial Mains Network	R&S	ENV216	102333	2022-08-10
EMC32 test software	R&S	EMC32(Ver.10.50.00)	N/A	N/A

## 2.3 Traceability

All measurement equipment calibrations are traceable to NIM (National Institute of Metrology) or where calibration is performed in other countries, to equivalent nationally recognized standards organizations.

## 2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

## 2.5 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements as below table.

Parameter	Uncertainty (k=2)
Occupied Channel Bandwidth	± 2.08 %
RF output power, conducted	± 0.99 dB
Unwanted Emissions, conducted	± 0.89 dB
All emissions, radiated	± 4.17 dB
Conducted Emission, (9kHz to 150kHz)/(150kHz to 30MHz)	± 3.70 dB / ± 3.30 dB

## 2.6 Location of Original Data

The original copies of all test data taken during actual testing were attached at Appendix A & B of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Shenzhen) Co., Ltd. file for certification follow-up purposes.

## 2.7 Status of Facility Used for Testing

The TÜV Rheinland (Shenzhen) Co., Ltd. Test facility located at No. 362 Huanguan Road Middle, Longhua District, 518110, Shenzhen, P. R. China. is listed on the US Federal Communications Commission list of facilities approved to perform measurements.

## 3 General Product Information

### 3.1 Product Function and Intended Use

The EUT is I/O Module, which supports Bluetooth (Low Energy) wireless technology. The difference between two modules is only on the display. IQ5-IO-8DO-B is LED, and IQ5-IO-8DO-HOA-B is LCD. As above difference, IQ5-IO-8DO-HOA-B is tested on RF part as the typical one.

For details refer to the User Manual, Technical Description and Circuit Diagram.

### 3.2 Ratings and System Details

**Table 2: Technical Specification of EUT**

General Information of EUT	Value
Kind of Equipment:	I/O Module
Type Designation:	IQ5-IO-8DO-B, IQ5-IO-8DO-HOA-B
FCC ID:	2A8LT-IQ5IO8DOB
IC:	1609A-IQ5IO8DOB
HVIN:	601001
PMN:	IQ5-IO-8DO-B, IQ5-IO-8DO-HOA-B
Operating Voltage:	AC/DC 24V
Testing Voltage:	AC 120V, 60Hz
Technical Specification of Bluetooth (Low Energy)	
Frequency Range:	2402 MHz to 2480 MHz
Type of Modulation:	GFSK
Channel Number:	40 channels
Data Rate:	1 Mbps, 2Mbps
Channel Separation:	2 MHz
Antenna Type:	Integral antenna
Antenna Gain:	3.1 dBi

**Table 3: RF Channel and Frequency of Bluetooth (Low Energy)**

RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)
<b>0</b>	<b>2402</b>	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	<b>19</b>	<b>2440</b>	29	2460	<b>39</b>	<b>2480</b>

Test frequencies are lowest channel: 2402 MHz, middle channel: 2440 MHz and highest channel: 2480 MHz

### 3.3 Independent Operation Modes

The basic operation modes are:

- A. On, Bluetooth Low Energy transmitting mode
  - 1) Low Channel
  - 2) Middle Channel
  - 3) High Channel
- B. On, Normal Working with Bluetooth connected
- C. Off

### 3.4 Noise Generating and Noise Suppressing Parts

Refer to Circuit Diagram for further details.

### 3.5 Submitted Documents

- Application Form
- User Manual
- FCC/IC Label and Location Info



## 4 Test Set-up and Operation Modes

### 4.1 Principle of Configuration Selection

**Radio Spectrum:** The equipment under test (EUT) was configured at its highest power output in order to measure its highest possible radiation and conducted level. The test modes were adapted accordingly in reference to the instructions for use.

**Emission:** The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

### 4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5. All tests were performed according to the procedures in ANSI C63.10: 2013.

### 4.3 Special Accessories and Auxiliary Equipment

Table 4: Auxiliary Equipment Used during Test

Description	Manufacturer	Model	S/N	Rating
Laptop	Lenovo	T480	PF-16A6N8	N/A
DC power Supply	Topward	3303D	809332	0-30 Volts, 0-3 Amps
Transformer	DELIXI	BK-100	N/A	Input 110V AC Output 24V AC

### 4.4 Countermeasures to Achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Technical Construction File (TCF).

No additional measures were employed to achieve compliance.

## 4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test (Below 1GHz)

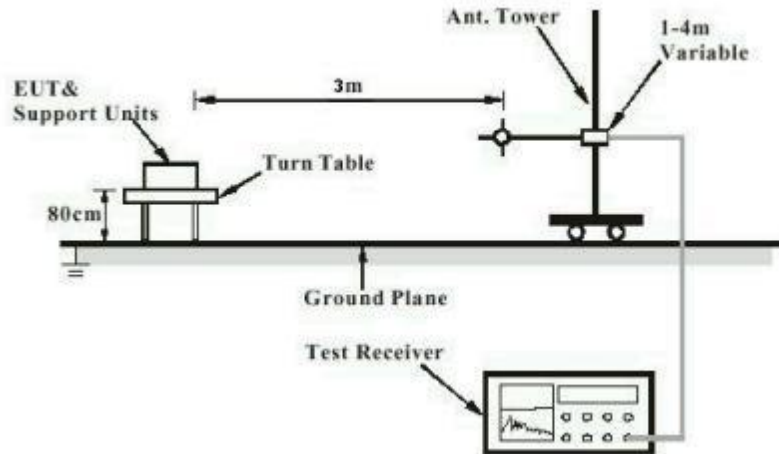


Diagram of Measurement Configuration for Radiation Test (Above 1GHz)

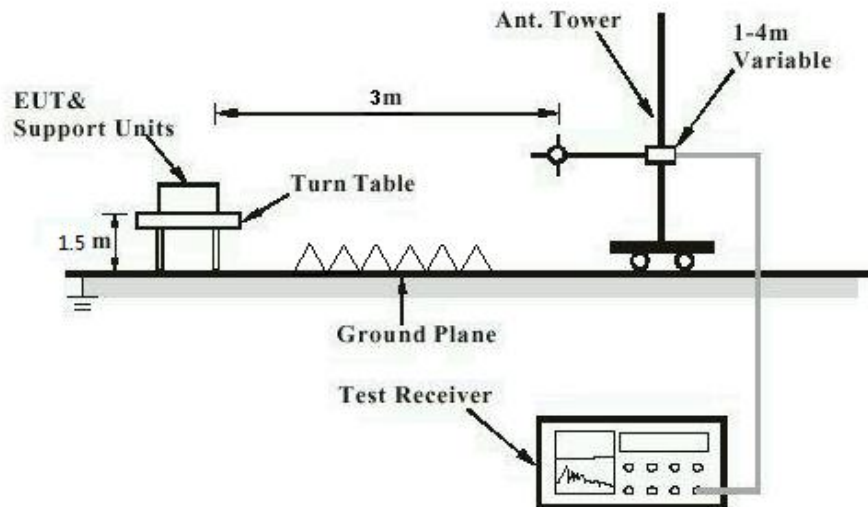


Diagram of Measurement Configuration for Mains Conduction Measurement


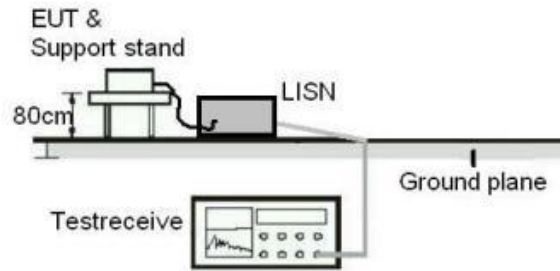


Diagram of Measurement Configuration for Conducted Transmitter Measurement

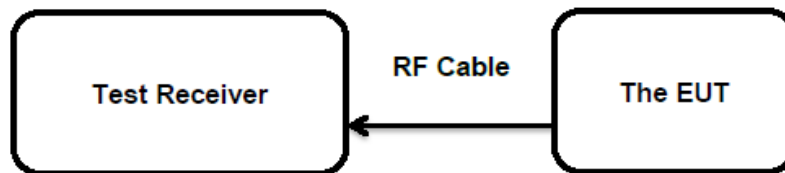

## 5 Test Results

### 5.1 Transmitter Requirement & Test Suites

#### 5.1.1 Antenna Requirement

**RESULT:****Pass****Test Specification**

Test standard : FCC Part 15.247(b)(4) and Part 15.203  
RSS-Gen Clause 6.8

According to the manufacturer declared, the EUT has an Integral antenna, the directional gain of antenna is 3.1 dBi, permanent attachment and no consideration of replacement.

Therefore, the EUT is considered sufficient to comply with the provision.

Refer to EUT Photo for further details.

### 5.1.2 Maximum Peak Conducted Output Power

**RESULT:**
**Pass**
**Test Specification**

Test standard : FCC Part 15.247(b)(3)  
                   : RSS-247 Clause 5.4(d)  
 Basic standard : ANSI C63.10: 2013  
 Limits : 1.0 Watts  
 Kind of test site : Shielded Room

**Test Setup**

Date of testing : 2022-06-13  
 Input voltage : AC 120V, 60Hz  
 Operation mode : A  
 Test channel : Low / Middle / High  
 Ambient temperature : 26.3 °C  
 Relative humidity : 57 %  
 Atmospheric pressure : 101 kPa

**Table 5: Test Result of Maximum Peak Conducted Output Power**

Test Mode	Data Rate	Test Channel (MHz)	Measured Peak Power		Limit (W)
			(dBm)	(W)	
Bluetooth (Low Energy)	1 Mbps	2402	8.40	0.0069	< 1.0
		2440	8.40	0.0069	
		2480	8.50	0.0071	
	2 Mbps	2402	8.20	0.0066	
		2440	8.30	0.0068	
		2480	8.40	0.0069	
<b>Maximum Measured Value</b>			8.50	0.0071	

Note:

- 1) The cable loss is taken into account in results.
- 2) Antenna gain(G): 3.1 dBi,  
 $e.i.r.p.=P_{(Peak\ power)}+ G$ , which is far below the 4 W

### 5.1.3 Conducted Power Spectral Density

**RESULT:****Pass****Test Specification**

Test standard : FCC Part 15.247(e)  
RSS-247 Clause 5.2(b)  
Basic standard : ANSI C63.10: 2013  
Limits : < 8 dBm / 3kHz  
Kind of test site : Shielded Room

**Test Setup**

Date of testing : 2022-06-13  
Input voltage : AC 120V, 60Hz  
Operation mode : A  
Test channel : Low / Middle / High  
Ambient temperature : 26.3 °C  
Relative humidity : 57 %  
Atmospheric pressure : 101 kPa

For the measurement records, refer to the appendix B.

### 5.1.4 6dB Bandwidth

**RESULT:****Pass****Test Specification**

Test standard	: FCC Part 15.247(a)(2) RSS-247 Clause 5.2(a)
Basic standard	: ANSI C63.10: 2013
Limits	: > 500 KHz
Kind of test site	: Shielded Room

**Test Setup**

Date of testing	: 2022-06-13
Input voltage	: AC 120V, 60Hz
Operation mode	: A
Test channel	: Low / Middle / High
Ambient temperature	: 26.3 °C
Relative humidity	: 57 %
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendix B.

### 5.1.5 99% Bandwidth

**RESULT:****Pass****Test Specification**

Test standard : RSS-Gen Clause 6.7  
Basic standard : ANSI C63.10: 2013  
Kind of test site : Shielded Room

**Test Setup**

Date of testing : 2022-06-13  
Input voltage : AC 120V, 60Hz  
Operation mode : A  
Test channel : Low / Middle / High  
Ambient temperature : 26.3 °C  
Relative humidity : 57 %  
Atmospheric pressure : 101 kPa

For the measurement records, refer to the appendix B.



## 5.1.6 Conducted Spurious Emissions Measured in 100 kHz Bandwidth

**RESULT:****Pass****Test Specification**

Test standard	: FCC Part 15.247(d) RSS-247 Clause 5.5
Basic standard	: ANSI C63.10: 2013
Limits	: 20dB (below that in the 100kHz bandwidth within the band that contains the highest level of the desired power); In addition, radiated emissions which fall in the restricted bands, must also comply with the radiated emission limits specified in 15.209(a)
Kind of test site	: Shielded Room

**Test Setup**

Date of testing	: 2022-06-13
Input voltage	: AC 120V, 60Hz
Operation mode	: A
Test channel	: Low / Middle / High
Ambient temperature	: 26.3 °C
Relative humidity	: 57 %
Atmospheric pressure	: 101 kPa

Test results of 100kHz Bandwidth of Frequency Band Edge by Conducted method refer to test plots, and compliance is achieved as well.

For the measurement records, refer to the appendix B.

**Prüfbericht - Nr.: CN22OBY1 001**

Test Report No.:

Seite 18 von 20

Page 18 of 20

## 5.1.7 Radiated Spurious Emission

**RESULT:****Pass****Test Specification**

Test standard : FCC Part 15.247(d) & FCC Part 15.205  
RSS-247 Clause 3.3

Basic standard : ANSI C63.10: 2013

Limits : Refer to 15.209(a) of FCC part 15.247(d)  
RSS-Gen Section 8.9 & 8.10

Kind of test site : 3m Semi-anechoic Chamber

**Test Setup**

Date of testing : 2022-06-19

Input voltage : AC 120V, 60Hz

Operation mode : A

Test channel : Low / Middle / High

Ambient temperature : Refer to test result

Relative humidity : Refer to test result

Atmospheric pressure : 101 kPa

**Remark:**

Testing carried out within frequency range 9kHz to the tenth harmonics. Only the worst-case spurious emissions configuration of the each mode were reported.

For the measurement records, refer to the appendix B.

### 5.1.8 Conducted Emission on AC Mains

**RESULT:****Pass****Test Specification**

Test standard	: FCC Part 15.207(a) RSS-Gen Clause 8.8
Basic standard	: ANSI C63.10: 2013
Frequency range	: 0.15 – 30MHz
Classification	: Class B
Limits	: FCC Part 15.207(a) RSS-Gen Table 3
Kind of test site	: Shielded Room

**Test Setup**

Date of testing	: 2022-07-13
Input voltage	: AC 120V, 60Hz
Operation mode	: B
Earthing	: Not connected
Ambient temperature	: 24.1 °C
Relative humidity	: 52.8 %
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendix B.

## 6 Photographs of the Test Set-Up

For photographs of the test set-up, refer to the appendix A.

## 7 List of Tables


Table 1: List of Test and Measurement Equipment.....	5
Table 2: Technical Specification of EUT .....	7
Table 3: RF Channel and Frequency of Bluetooth (Low Energy) .....	8
Table 4: Auxiliary Equipment Used during Test .....	9
Table 5: Test Result of Maximum Peak Conducted Output Power.....	13

## Appendix B: Test Results of Bluetooth (Low Energy)


<b>APPENDIX B: TEST RESULTS OF BLUETOOTH (LOW ENERGY)</b> .....	<b>1</b>
<b>APPENDIX B.1: TEST RESULTS OF CONDUCTED POWER SPECTRAL DENSITY</b> .....	<b>2</b>
<i>Bluetooth LE Mode, 1Mbps</i> .....	2
<i>Bluetooth LE Mode, 2Mbps</i> .....	3
<b>APPENDIX B.2: TEST RESULTS OF 6DB BANDWIDTH</b> .....	<b>5</b>
<i>Bluetooth LE Mode, 1Mbps</i> .....	5
<i>Bluetooth LE Mode, 2Mbps</i> .....	8
<b>APPENDIX B.3: TEST RESULTS OF 99% BANDWIDTH</b> .....	<b>11</b>
<i>Bluetooth LE Mode, 1Mbps</i> .....	11
<i>Bluetooth LE Mode, 2Mbps</i> .....	14
<b>APPENDIX B.4: TEST RESULTS OF CONDUCTED SPURIOUS EMISSIONS MEASURED IN 100 KHZ BANDWIDTH</b> .....	<b>17</b>
<i>Bluetooth LE Mode, 1Mbps</i> .....	17
<i>Bluetooth LE Mode, 2Mbps</i> .....	21
<b>APPENDIX B.5: TEST RESULTS OF RADIATED SPURIOUS EMISSIONS</b> .....	<b>25</b>
30 MHz to 1GHz.....	25
1GHz-18GHz.....	29
<b>APPENDIX B.6: TEST RESULTS OF RADIATED EMISSIONS IN RESTRICTED BANDS</b> .....	<b>41</b>
<b>APPENDIX B.7: TEST PLOTS OF CONDUCTED EMISSION ON AC MAINS</b> .....	<b>45</b>
<i>Normal Working with Bluetooth connected</i> .....	45

### Appendix B.1: Test Results of Conducted Power Spectral Density


Bluetooth LE Mode, 1Mbps

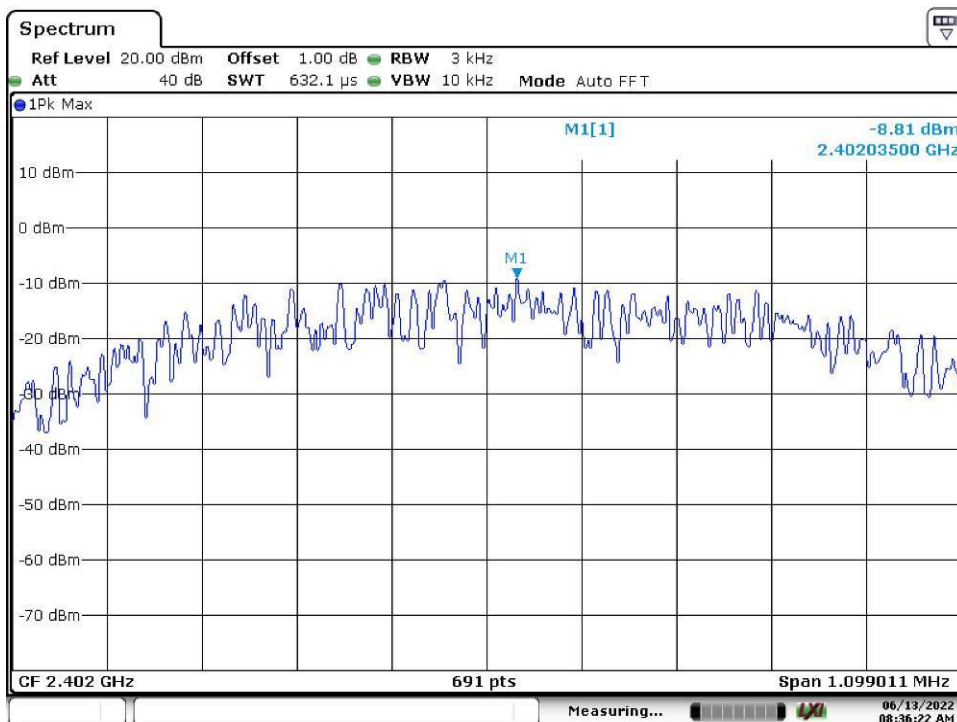

Date: 13.JUN.2022 08:36:21

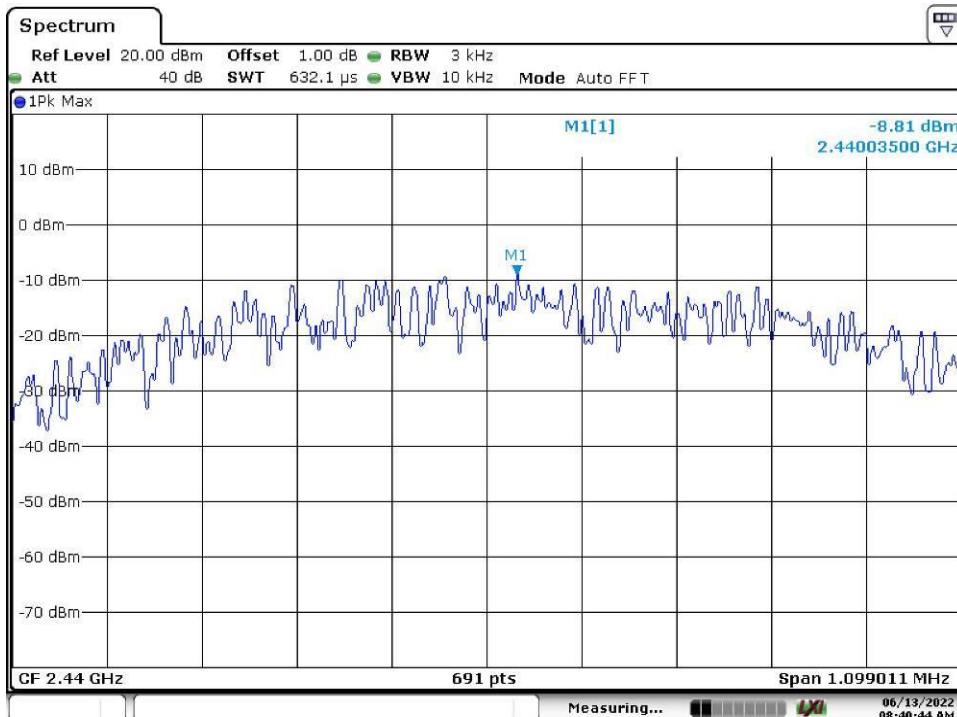


Date: 13.JUN.2022 08:40:44

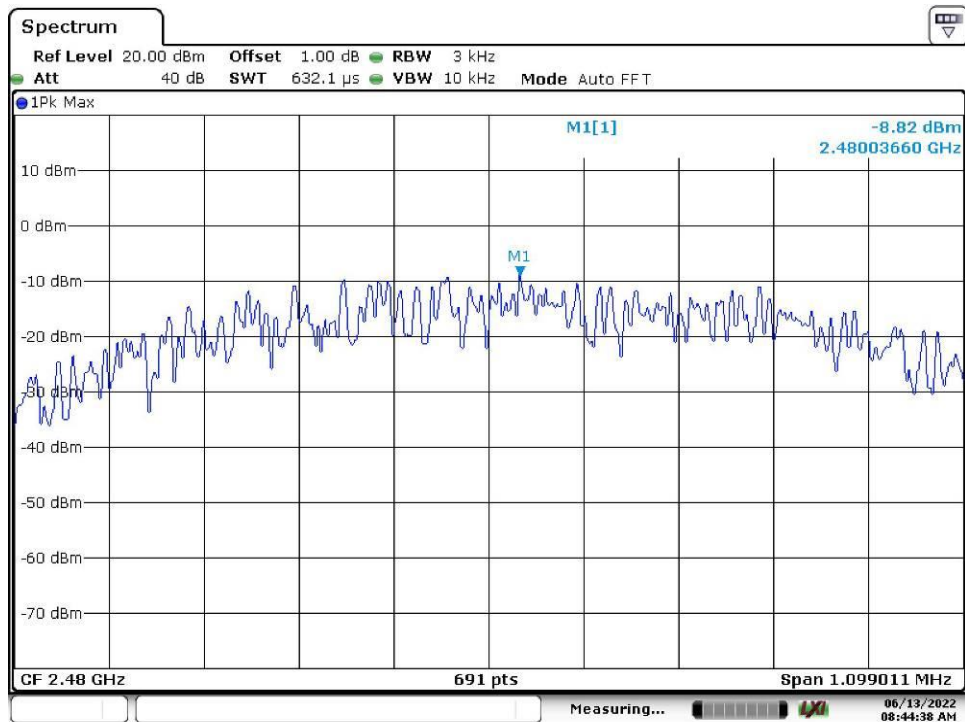


Date: 13.JUN.2022 00:44:30


Bluetooth LE Mode, 2Mbps

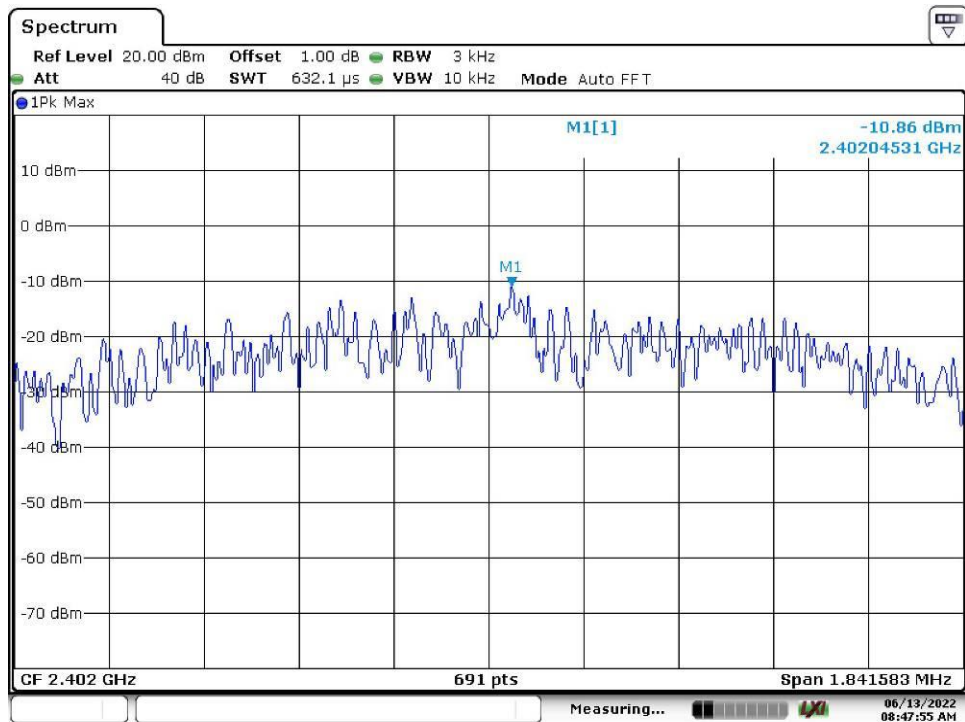

Date: 13.JUN.2022 00:47:56

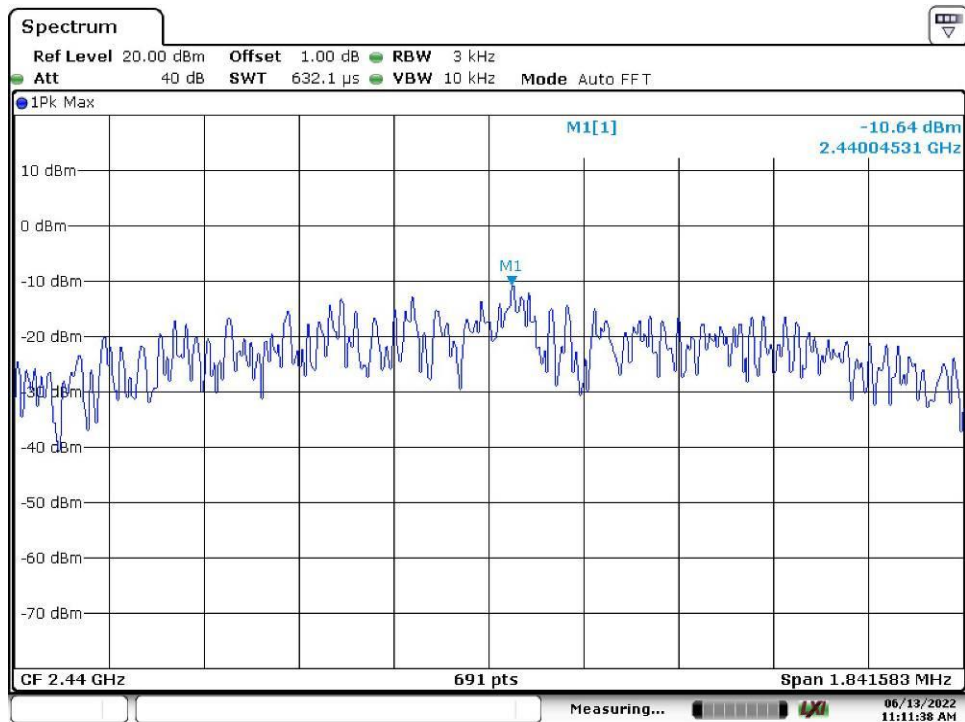

Date: 13.JUN.2022 11:11:30

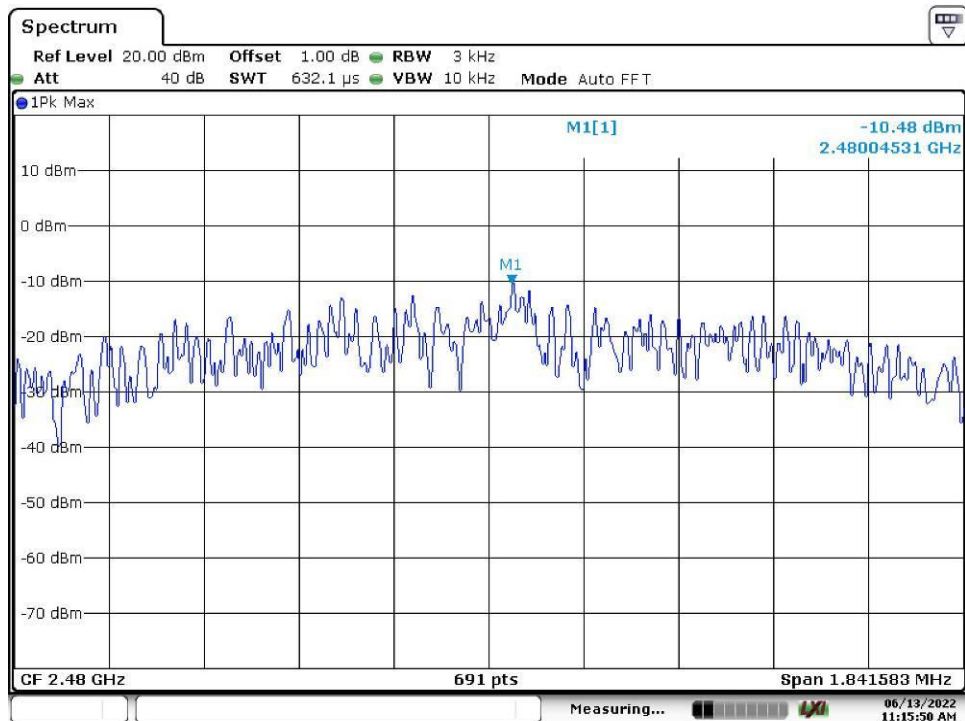

Date: 13.JUN.2022 11:15:50



## Appendix B.2: Test Results of 6dB Bandwidth

Bluetooth LE Mode, 1Mbps

### Minimum Emission Bandwidth 6 dB (2402 MHz; 10.000 dBm; 1 MHz)

Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013


#### 6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2402.000000	0.732674	0.500000	---	2401.683168	2402.415842

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2402.000000	6.9	PASS

6 dB Bandwidth

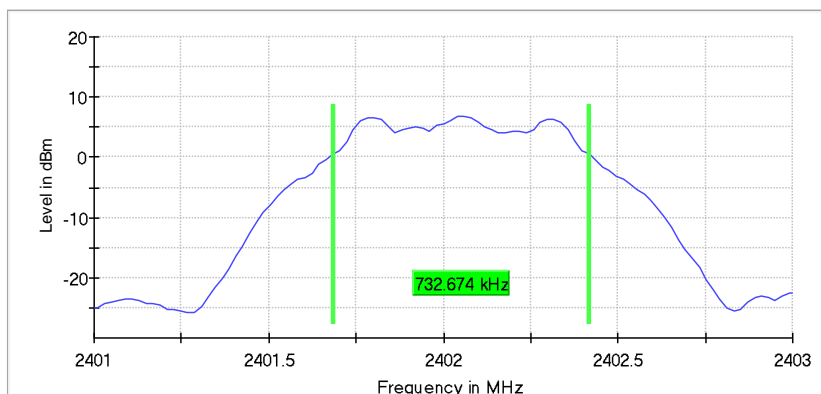

#### Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.40100 GHz	2.40100 GHz
Stop Frequency	2.40300 GHz	2.40300 GHz
Span	2.000 MHz	2.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	101	~ 40
Sweeptime	18.938 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	8 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.20 dB	0.50 dB

**Minimum Emission Bandwidth 6 dB (2440 MHz; 10.000 dBm; 1 MHz)**


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

**6 dB Bandwidth**

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2440.000000	0.732674	0.500000	---	2439.683168	2440.415842

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2440.000000	7.0	PASS

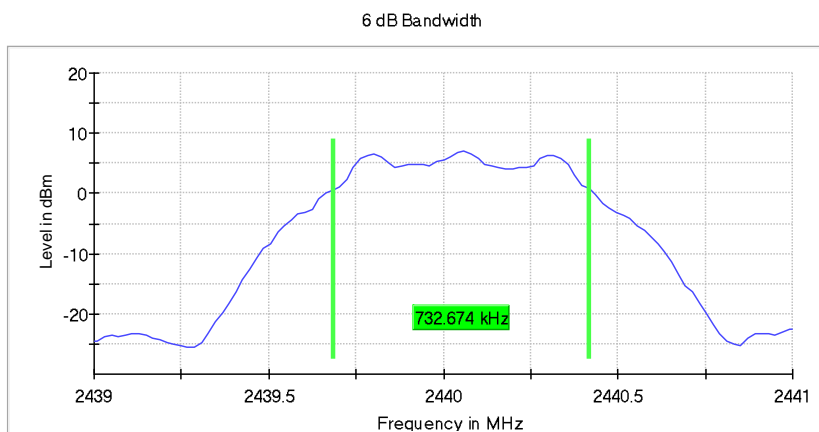

**Measurement**

Setting	Instrument Value	Target Value
Start Frequency	2.43900 GHz	2.43900 GHz
Stop Frequency	2.44100 GHz	2.44100 GHz
Span	2.000 MHz	2.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	101	~ 40
Sweeptime	18.938 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	12 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.20 dB	0.50 dB

**Minimum Emission Bandwidth 6 dB (2480 MHz; 10.000 dBm; 1 MHz)**


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

**6 dB Bandwidth**

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2480.000000	0.732674	0.500000	---	2479.683168	2480.415842

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2480.000000	7.1	PASS

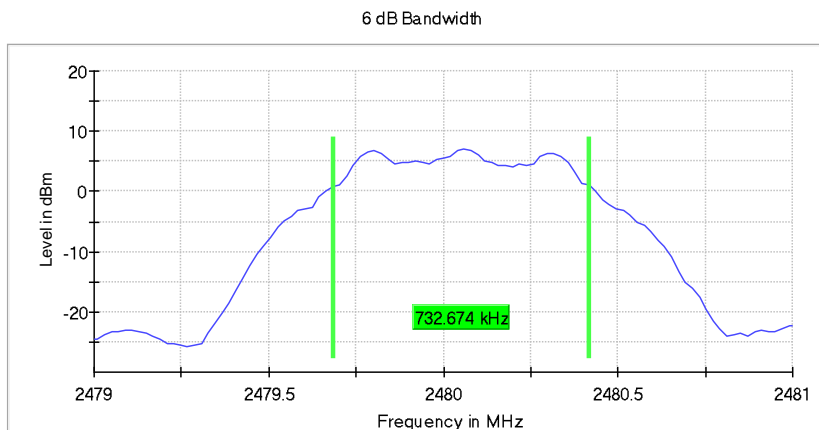

**Measurement**

Setting	Instrument Value	Target Value
Start Frequency	2.47900 GHz	2.47900 GHz
Stop Frequency	2.48100 GHz	2.48100 GHz
Span	2.000 MHz	2.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	101	~ 40
Sweeptime	18.938 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	9 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.00 dB	0.50 dB

Bluetooth LE Mode, 2Mbps

**Minimum Emission Bandwidth 6 dB (2402 MHz; 10.000 dBm; 2 MHz)**


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

**6 dB Bandwidth**

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2402.000000	1.227722	0.500000	---	2401.445545	2402.673267

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2402.000000	7.0	PASS

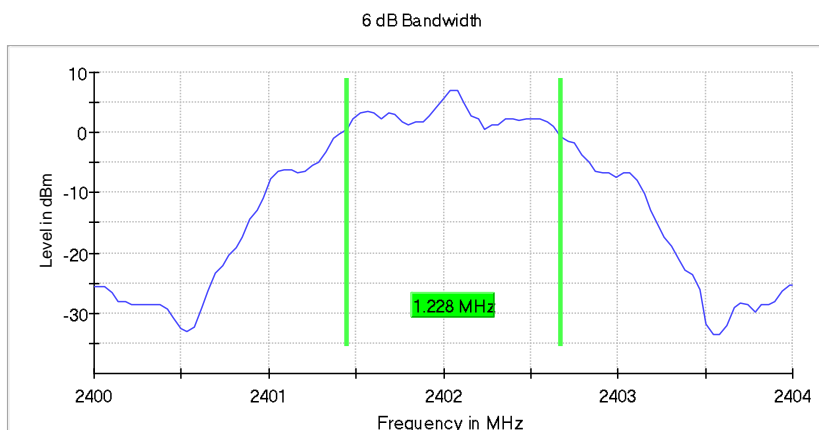

**Measurement**

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.40400 GHz	2.40400 GHz
Span	4.000 MHz	4.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	101	~ 80
SweepTime	18.938 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	11 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.26 dB	0.50 dB

### Minimum Emission Bandwidth 6 dB (2440 MHz; 10.000 dBm; 2 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

#### 6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2440.000000	1.227722	0.500000	---	2439.445545	2440.673267

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2440.000000	7.0	PASS

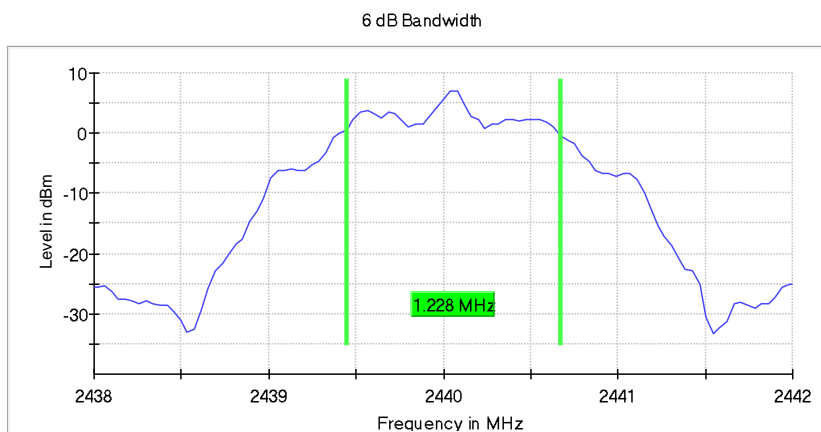

#### Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.43800 GHz	2.43800 GHz
Stop Frequency	2.44200 GHz	2.44200 GHz
Span	4.000 MHz	4.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	101	~ 80
Sweeptime	18.938 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	15 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.08 dB	0.50 dB

### Minimum Emission Bandwidth 6 dB (2480 MHz; 10.000 dBm; 2 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

#### 6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2480.000000	1.227722	0.500000	---	2479.445545	2480.673267

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2480.000000	7.2	PASS

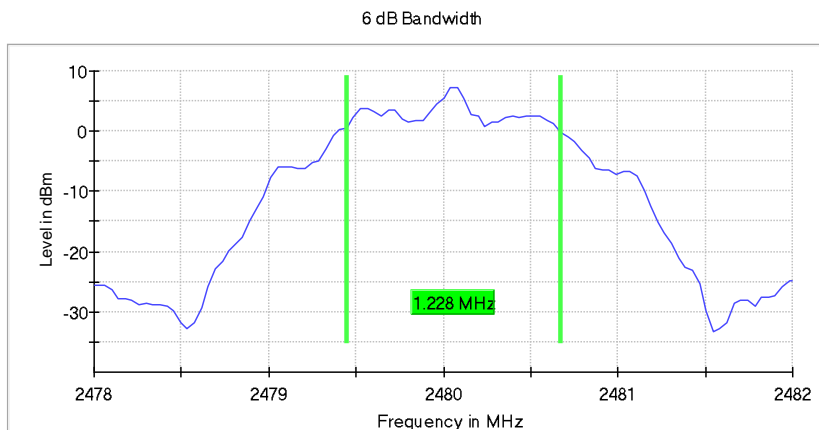

#### Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.47800 GHz	2.47800 GHz
Stop Frequency	2.48200 GHz	2.48200 GHz
Span	4.000 MHz	4.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	101	~ 80
Sweeptime	18.938 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	11 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.08 dB	0.50 dB

### Appendix B.3: Test Results of 99% Bandwidth

Bluetooth LE Mode, 1Mbps

#### Occupied Channel Bandwidth 99% (2402 MHz; 10.000 dBm; 1 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

#### 99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2402.000000	1.045000	---	---	2401.542500	2402.587500

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2402.000000	PASS

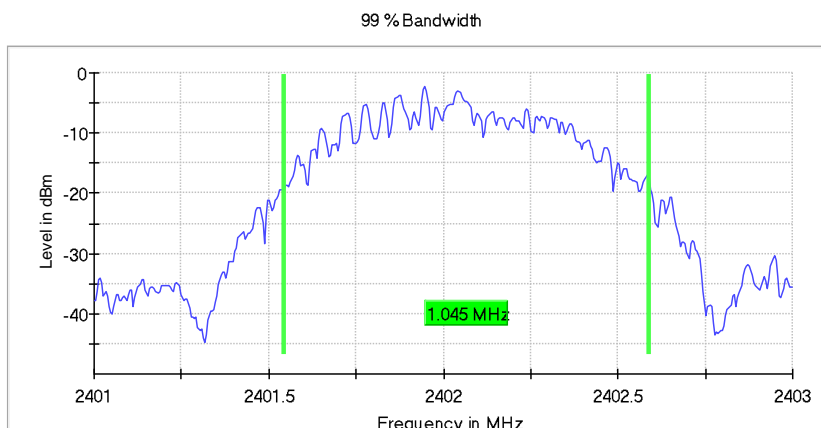

#### Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.40100 GHz	2.40100 GHz
Stop Frequency	2.40300 GHz	2.40300 GHz
Span	2.000 MHz	2.000 MHz
RBW	10.000 kHz	>= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	400	~ 400
Sweeptime	189.648 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	6 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.12 dB	0.30 dB

**Occupied Channel Bandwidth 99% (2440 MHz; 10.000 dBm; 1 MHz)**


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

**99 % Bandwidth**

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2440.000000	1.045000	---	---	2439.542500	2440.587500

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2440.000000	PASS

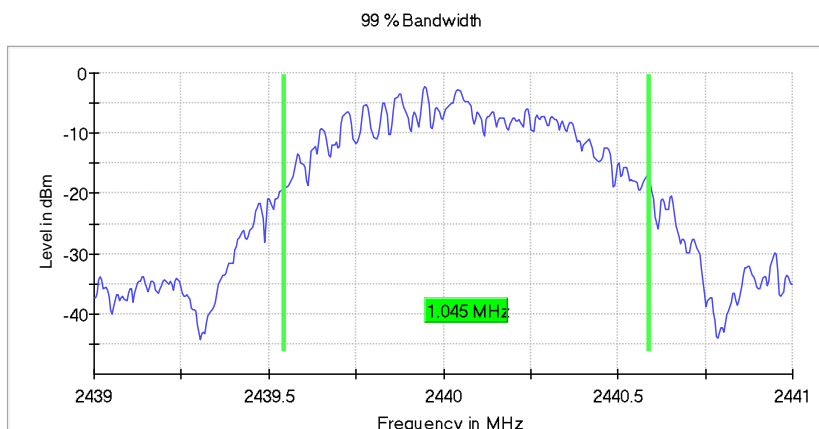

**Measurement**

Setting	Instrument Value	Target Value
Start Frequency	2.43900 GHz	2.43900 GHz
Stop Frequency	2.44100 GHz	2.44100 GHz
Span	2.000 MHz	2.000 MHz
RBW	10.000 kHz	>= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	400	~ 400
Sweeptime	189.648 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	5 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.20 dB	0.30 dB



**Occupied Channel Bandwidth 99% (2480 MHz; 10.000 dBm; 1 MHz)**


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

**99 % Bandwidth**

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2480.000000	1.045000	---	---	2479.542500	2480.587500

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2480.000000	PASS

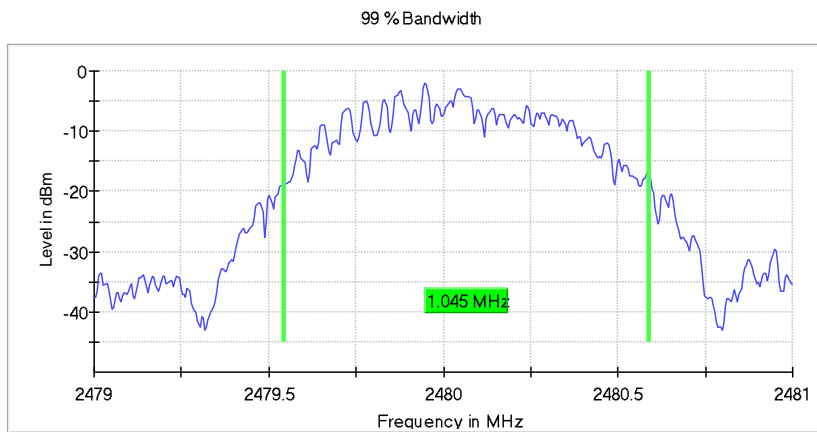

**Measurement**

Setting	Instrument Value	Target Value
Start Frequency	2.47900 GHz	2.47900 GHz
Stop Frequency	2.48100 GHz	2.48100 GHz
Span	2.000 MHz	2.000 MHz
RBW	10.000 kHz	>= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	400	~ 400
Sweeptime	189.648 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	6 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.23 dB	0.30 dB

Bluetooth LE Mode, 2Mbps

**Occupied Channel Bandwidth 99% (2402 MHz; 10.000 dBm; 2 MHz)**


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

**99 % Bandwidth**

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2402.000000	2.030000	---	---	2401.065000	2403.095000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2402.000000	PASS

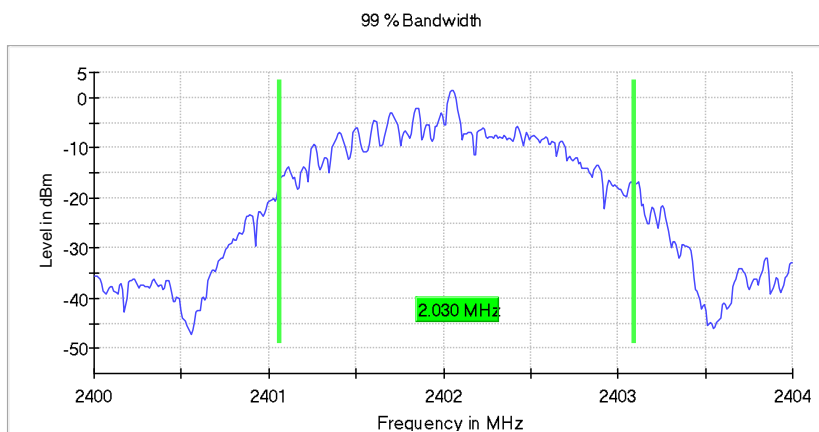

**Measurement**

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.40400 GHz	2.40400 GHz
Span	4.000 MHz	4.000 MHz
RBW	20.000 kHz	>= 20.000 kHz
VBW	100.000 kHz	>= 60.000 kHz
SweepPoints	400	~ 400
Sweeptime	94.824 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	7 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.10 dB	0.30 dB

**Occupied Channel Bandwidth 99% (2440 MHz; 10.000 dBm; 2 MHz)**


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

**99 % Bandwidth**

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2440.000000	2.030000	---	---	2439.065000	2441.095000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2440.000000	PASS

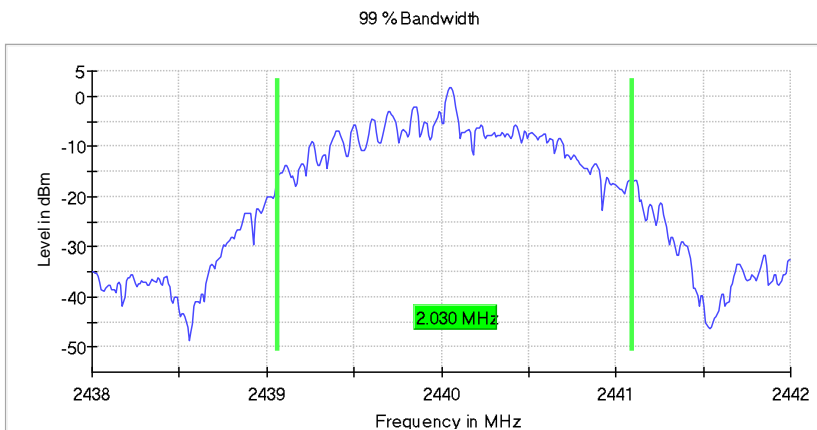

**Measurement**

Setting	Instrument Value	Target Value
Start Frequency	2.43800 GHz	2.43800 GHz
Stop Frequency	2.44200 GHz	2.44200 GHz
Span	4.000 MHz	4.000 MHz
RBW	20.000 kHz	>= 20.000 kHz
VBW	100.000 kHz	>= 60.000 kHz
SweepPoints	400	~ 400
Sweeptime	94.824 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	8 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.21 dB	0.30 dB

**Occupied Channel Bandwidth 99% (2480 MHz; 10.000 dBm; 2 MHz)**


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

**99 % Bandwidth**

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2480.000000	2.030000	---	---	2479.065000	2481.095000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2480.000000	PASS

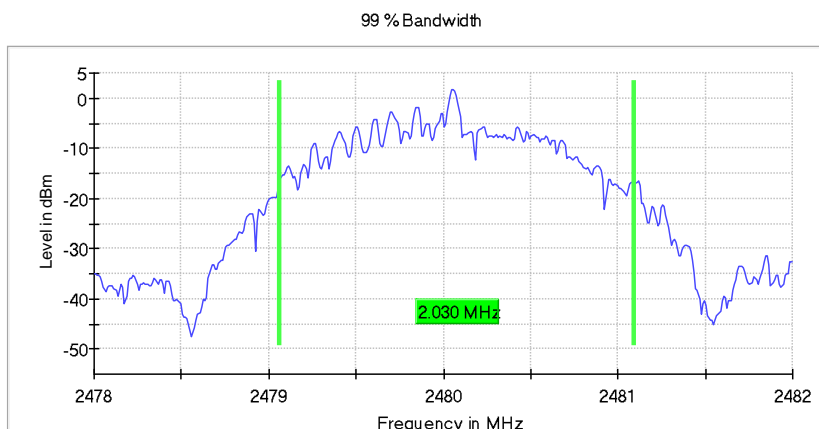

**Measurement**

Setting	Instrument Value	Target Value
Start Frequency	2.47800 GHz	2.47800 GHz
Stop Frequency	2.48200 GHz	2.48200 GHz
Span	4.000 MHz	4.000 MHz
RBW	20.000 kHz	>= 20.000 kHz
VBW	100.000 kHz	>= 60.000 kHz
SweepPoints	400	~ 400
Sweeptime	94.824 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	6 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.16 dB	0.30 dB


### Appendix B.4: Test Results of Conducted Spurious Emissions Measured in 100 kHz Bandwidth

Bluetooth LE Mode, 1Mbps

Low Channel:



Date: 13.JUN.2022 00:31:07

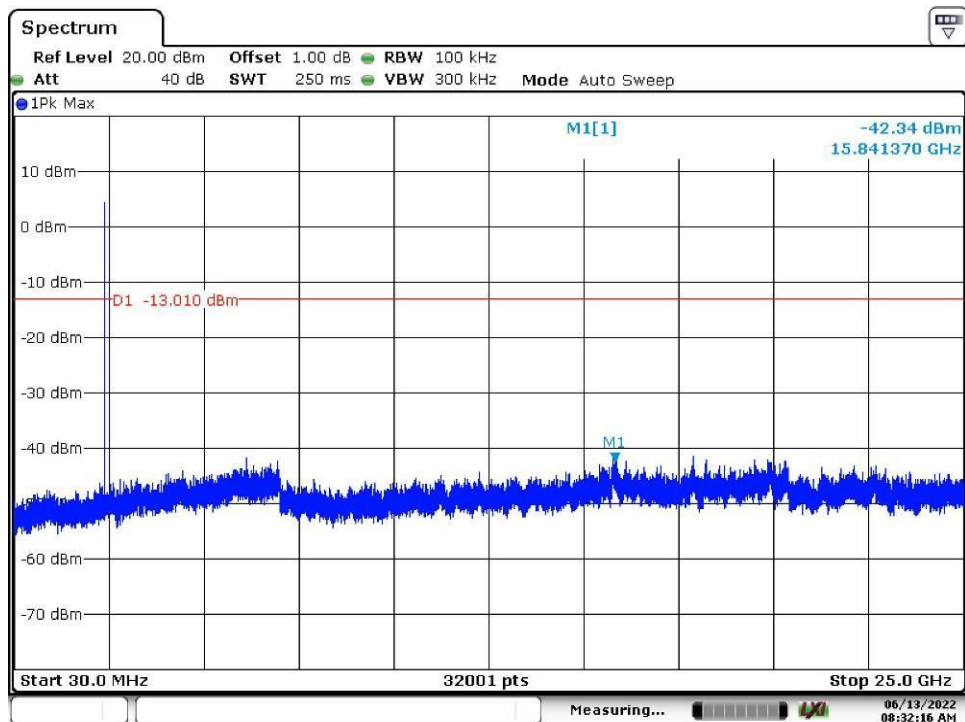


Date: 13.JUN.2022 00:32:16

Middle Channel:



Date: 13.JUN.2022 00:30:25

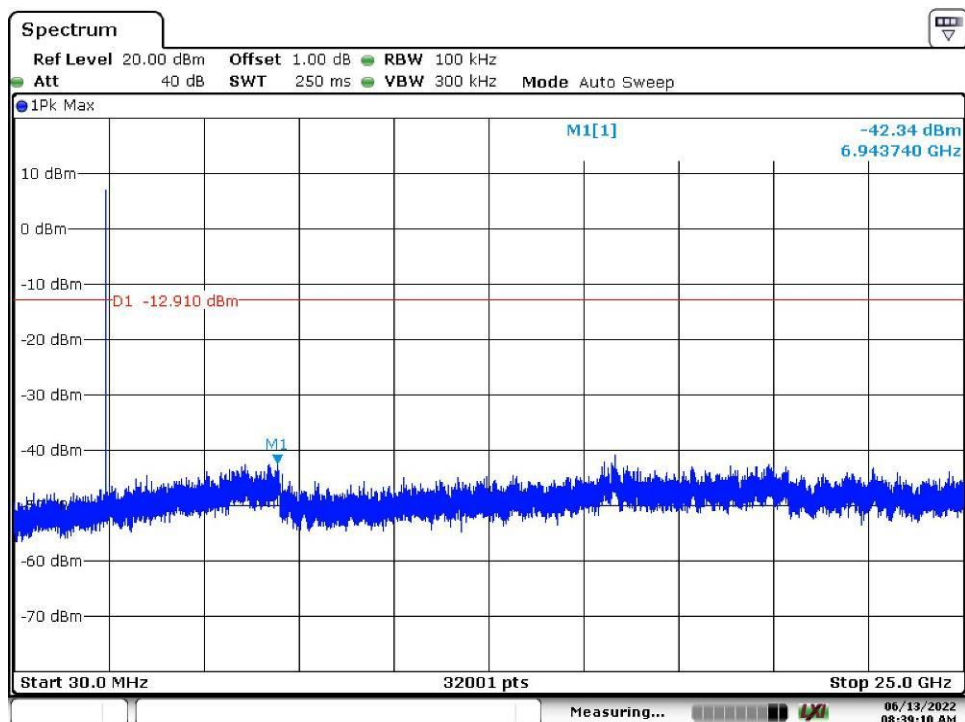


Date: 13.JUN.2022 00:39:11

High Channel:




Date: 13.JUN.2022 00:42:40

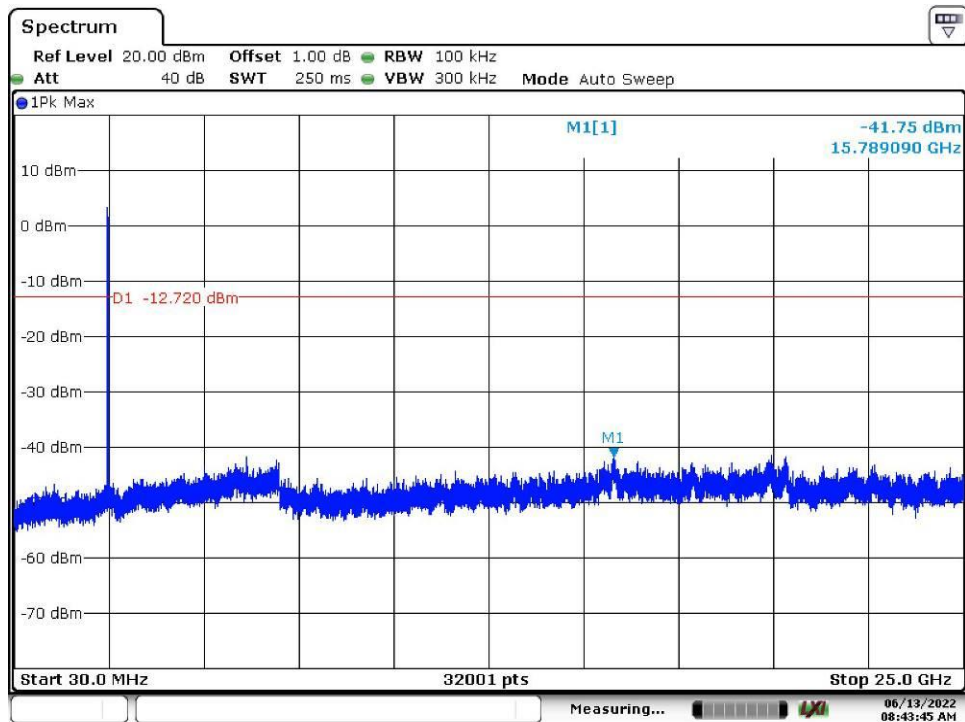


Date: 13.JUN.2022 00:43:45

Band Edge, Low Channel:

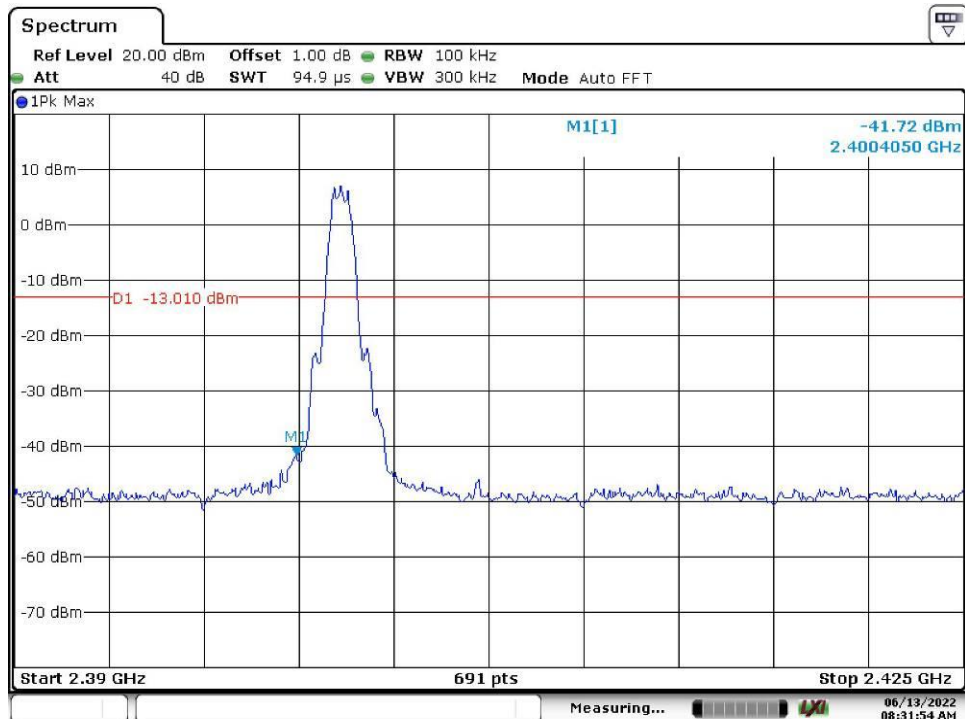

Band Edge, High Channel:

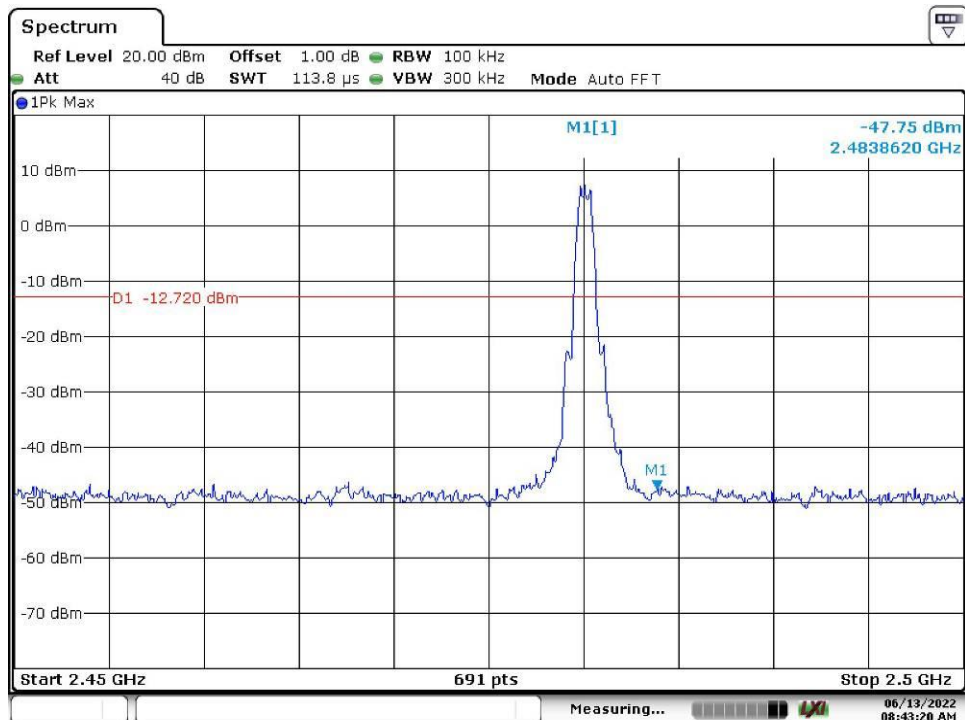




Bluetooth LE Mode, 2Mbps

Low Channel:




Date: 13.JUN.2022 00:45:10

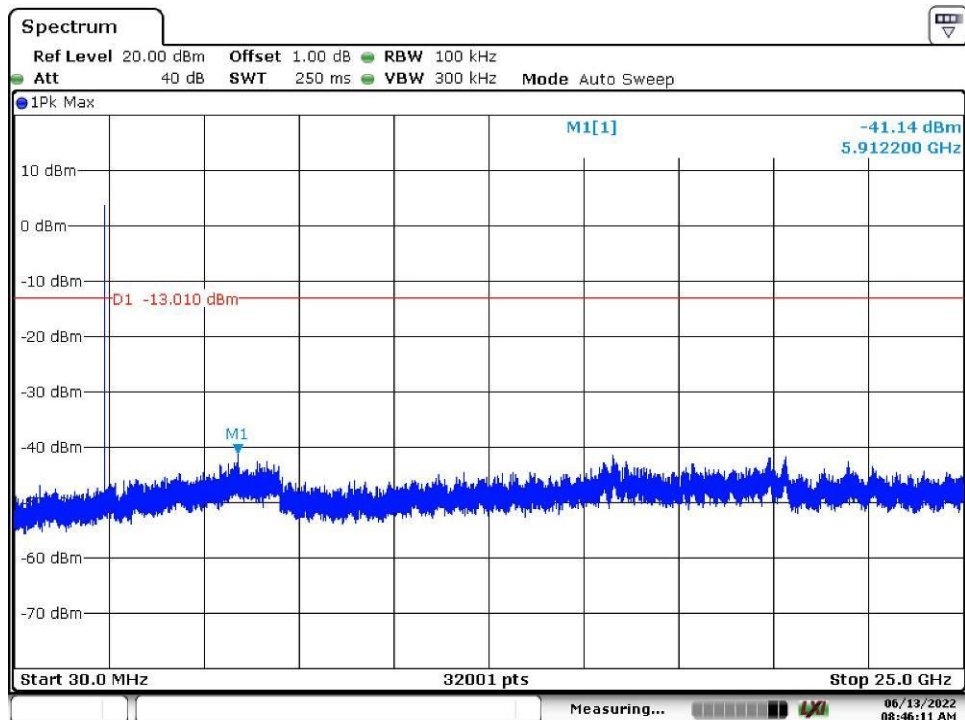


Date: 13.JUN.2022 00:46:12

Middle Channel:

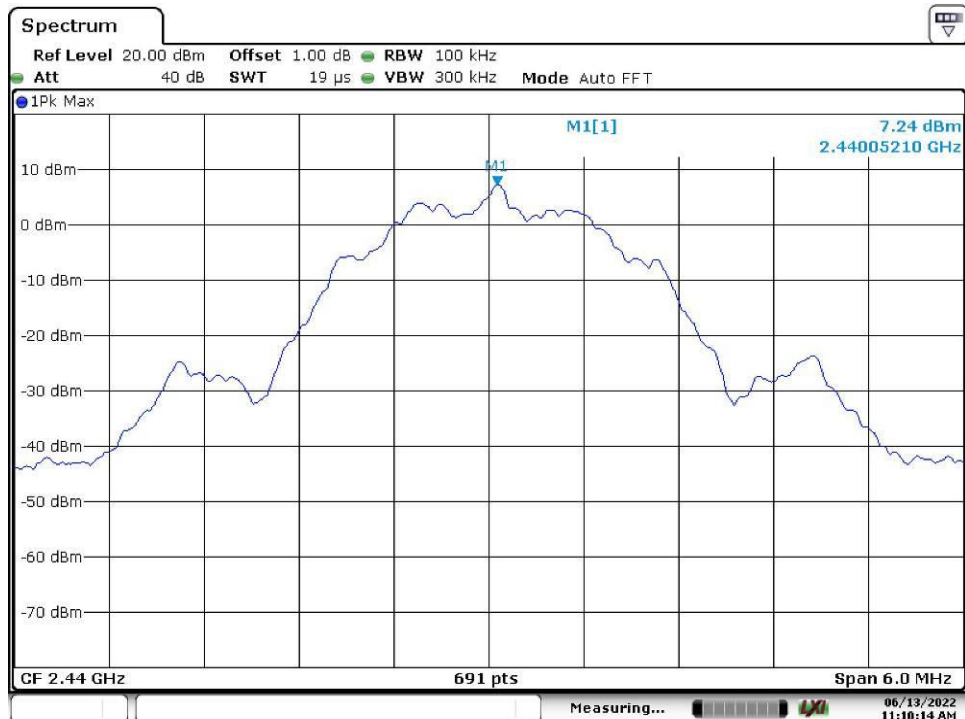


Date: 13.JUN.2022 11:10:14

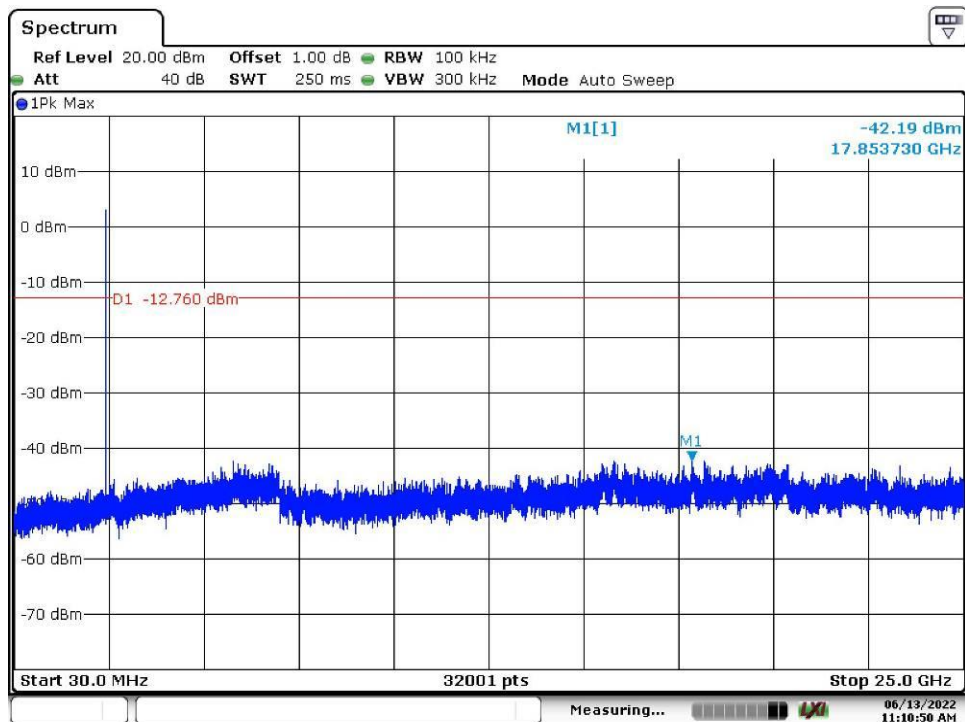


Date: 13.JUN.2022 11:10:49

High Channel:

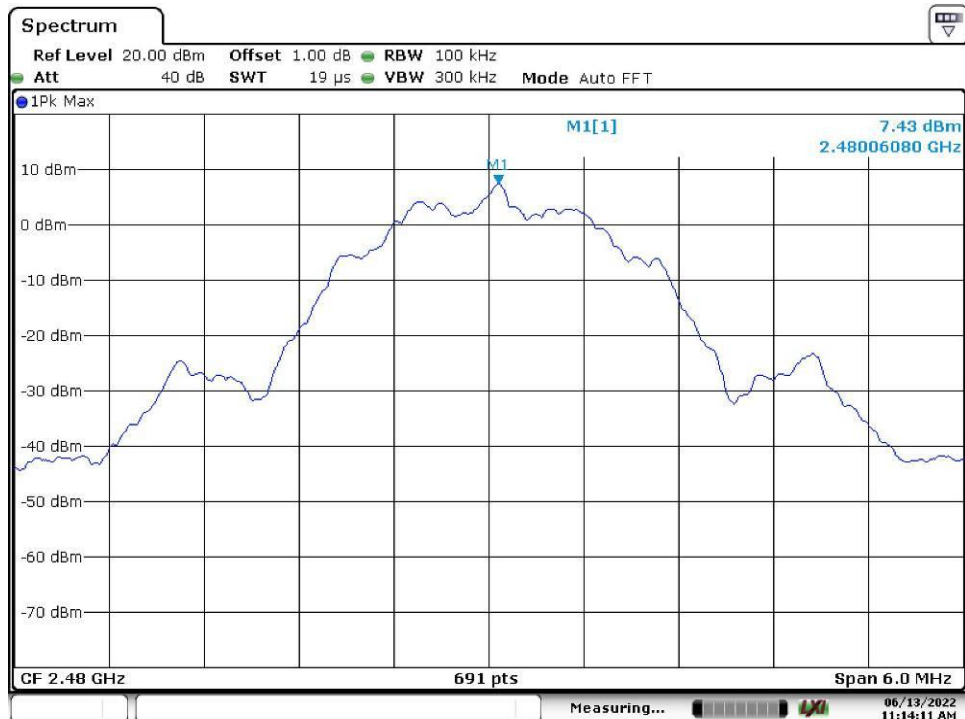


Date: 13.JUN.2022 11:14:11

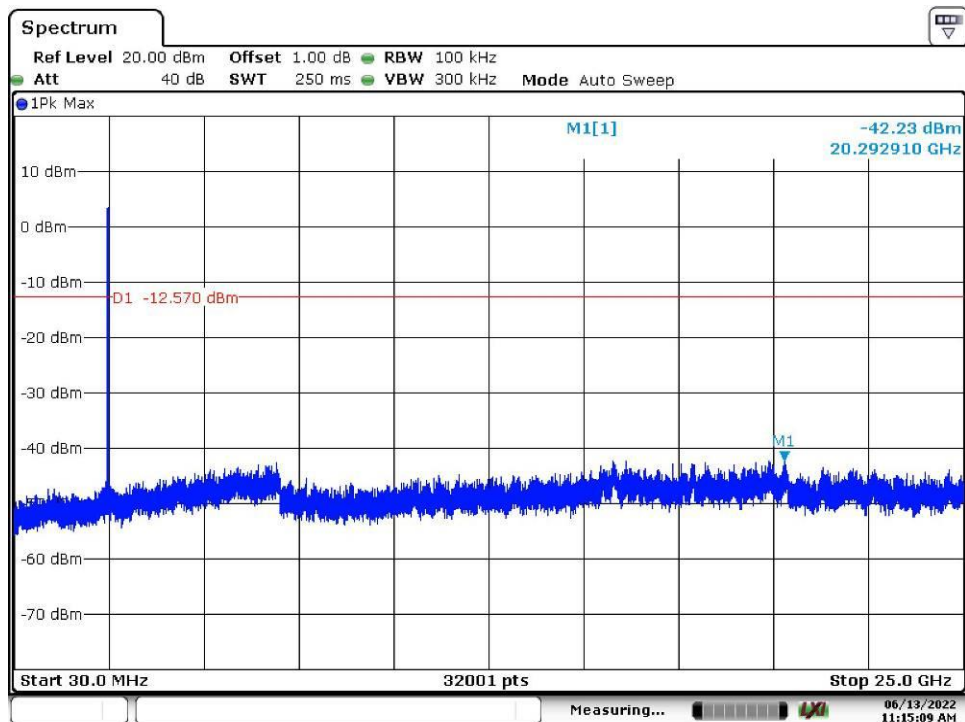


Date: 13.JUN.2022 11:15:09

Band Edge, Low Channel:

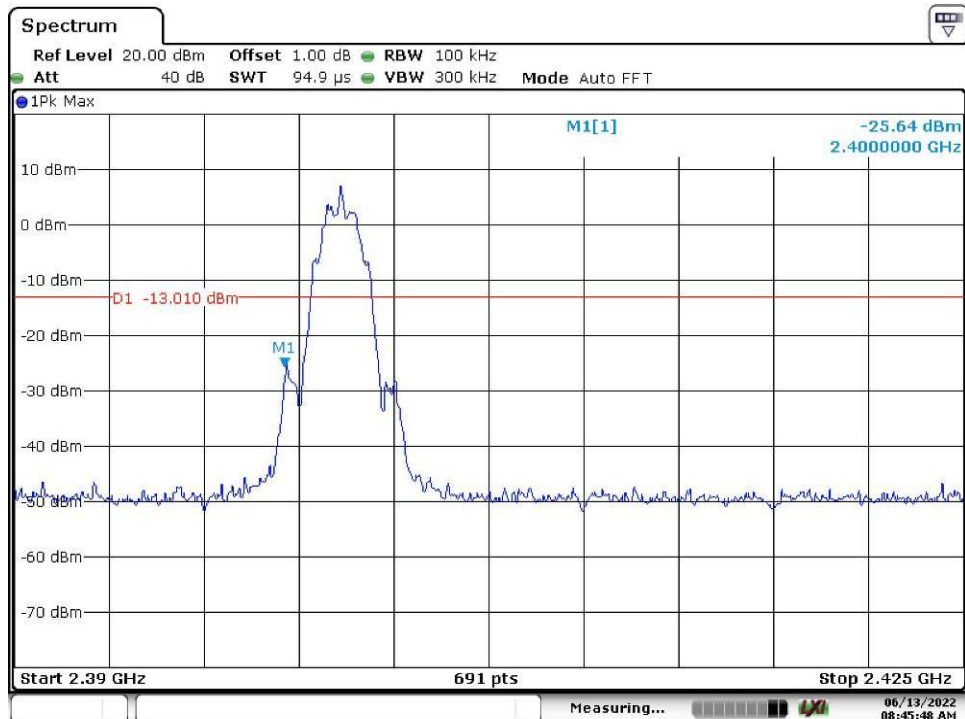

Date: 13.JUN.2022 08:45:40

Band Edge, High Channel:

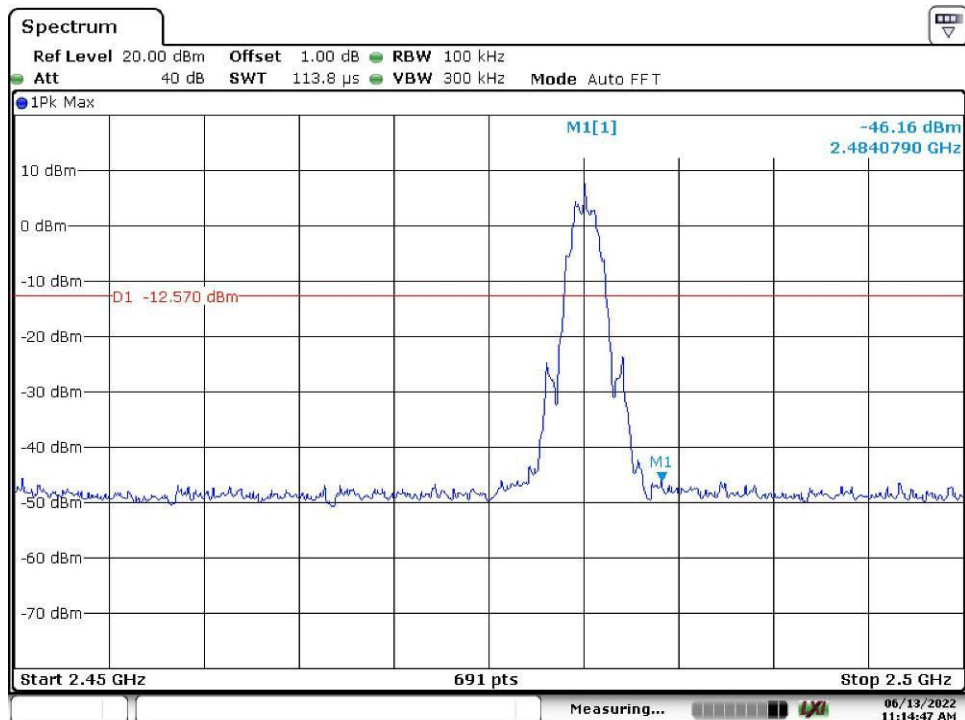

Date: 13.JUN.2022 11:14:47

## Appendix B.5: Test Results of Radiated Spurious Emissions


Note:

- 1) This testing was carried out on different modulations, but only the worst case was presented in this report.
- 2) Testing was carried out within frequency range 9kHz to the tenth harmonics. The measurement results below 30MHz and 18GHz - 26.5GHz were greater than 20dB below the limit, so only the radiated spurious emissions from 30MHz to 18GHz were reported.

30 MHz to 1GHz

### EUT Information

EUT Name:	I/O Module
Model:	IQ5-IO-8DO-HOA-B
Test Mode:	BLE 1M_High channel
Order No/Sample No:	168376481/A003268712-005
Test Voltage::	120V/60Hz
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

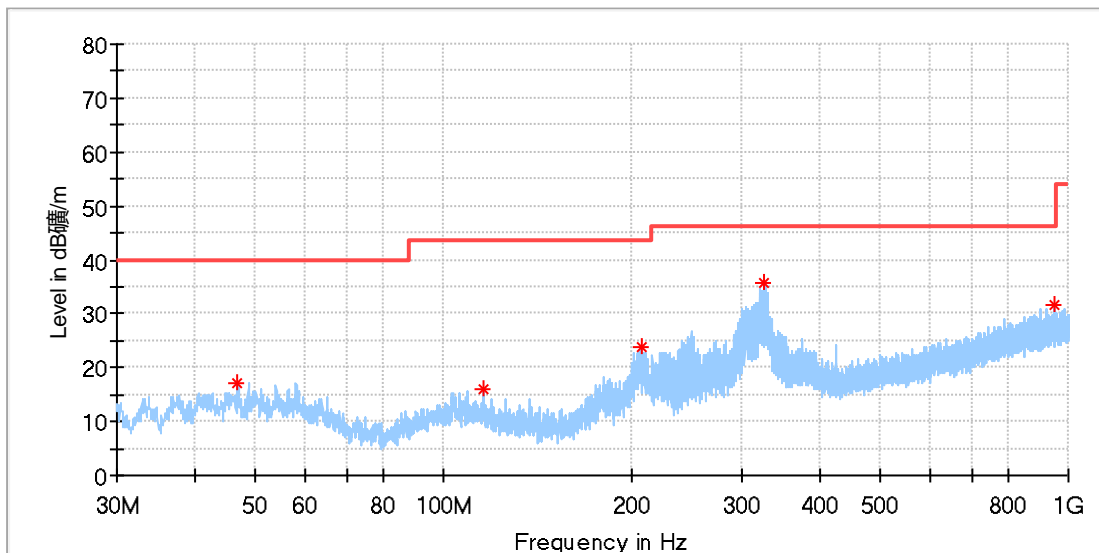


### Critical\_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
46.878000	17.08	40.00	22.92	100.0	H	181.0	-18.5
115.505500	15.91	43.50	27.59	100.0	H	92.0	-19.8
207.170500	23.93	43.50	19.57	100.0	H	52.0	-18.9
325.025500	35.76	46.00	10.24	100.0	H	6.0	-15.6
951.306000	31.77	46.00	14.23	100.0	H	181.0	-4.4

## EUT Information

EUT Name:	I/O Module
Model:	IQ5-IO-8DO-HOA-B
Test Mode:	BLE 1M_High channel
Order No/Sample No:	168376481/A003268712-005
Test Voltage::	120V/60Hz
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

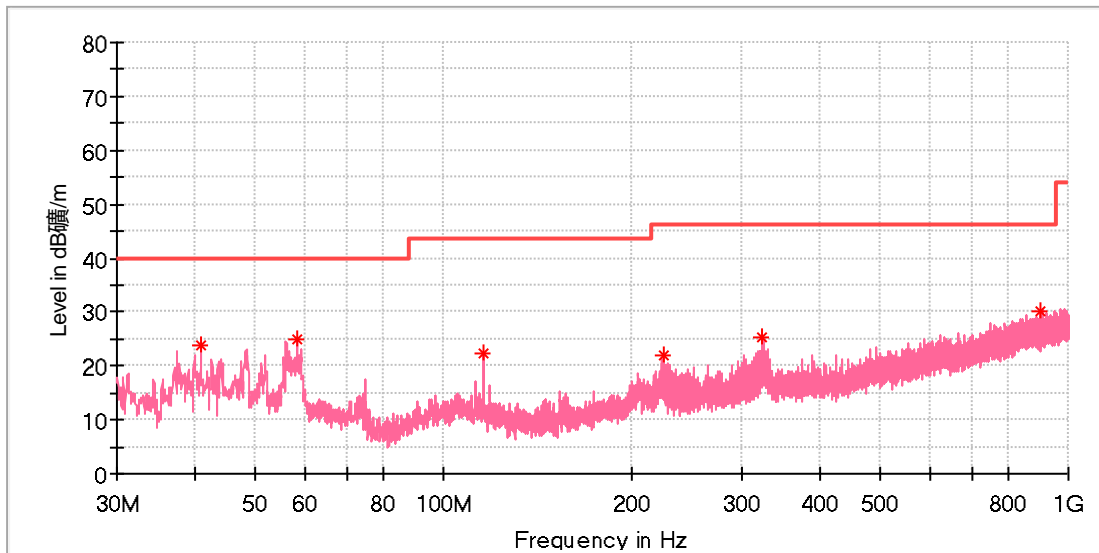


## Critical\_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
40.864000	23.76	40.00	16.24	100.0	V	283.0	-19.9
58.324000	24.84	40.00	15.16	100.0	V	217.0	-18.8
115.602500	22.16	43.50	21.34	100.0	V	325.0	-19.9
224.970000	22.09	46.00	23.91	100.0	V	0.0	-18.3
322.843000	25.13	46.00	20.87	100.0	V	57.0	-15.7
899.120000	30.08	46.00	15.92	100.0	V	145.0	-5.0

## EUT Information

EUT Name:	I/O Module
Model:	IQ5-IO-8DO-HOA-B
Test Mode:	BLE 1M_Low channel
Order No/Sample No:	168376481/A003268712-005
Test Voltage::	120V/60Hz
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

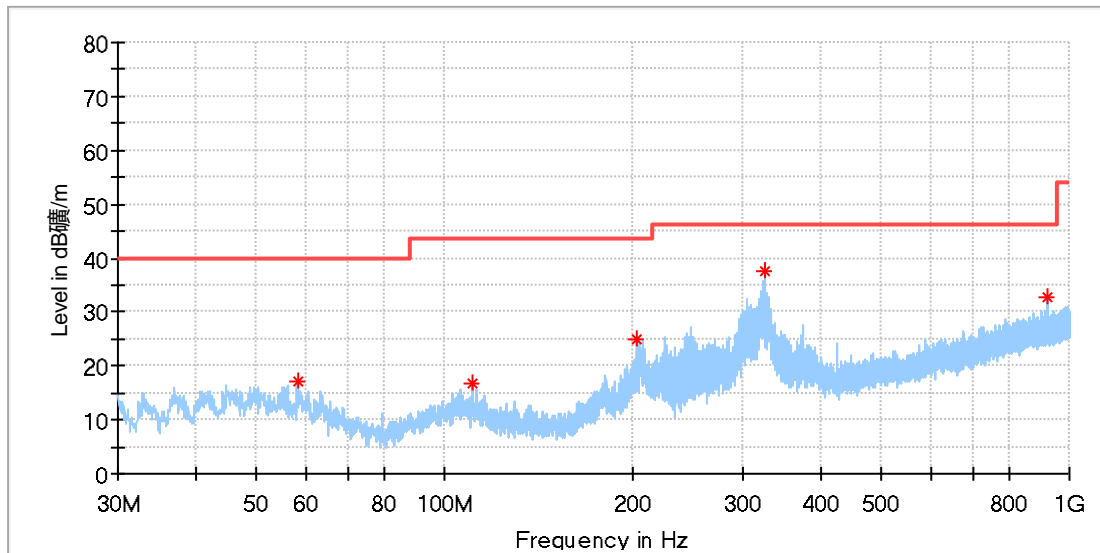


## Critical\_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
58.130000	17.19	40.00	22.81	100.0	H	218.0	-18.8
110.607000	16.80	43.50	26.70	100.0	H	35.0	-19.2
202.708500	24.84	43.50	18.66	100.0	H	49.0	-18.9
324.977000	37.71	46.00	8.29	100.0	H	6.0	-15.6
925.067500	32.57	46.00	13.43	100.0	H	204.0	-4.7

## EUT Information

EUT Name:	I/O Module
Model:	IQ5-IO-8DO-HOA-B
Test Mode:	BLE 1M_Low channel
Order No/Sample No:	168376481/A003268712-005
Test Voltage::	120V/60Hz
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

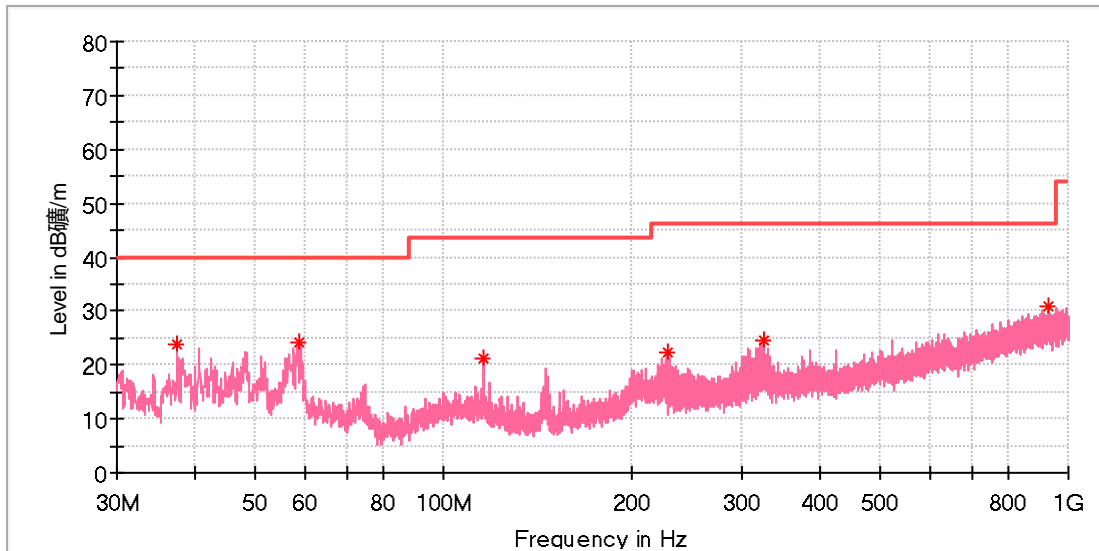

## Critical\_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
37.517500	23.88	40.00	16.12	100.0	V	185.0	-21.0
58.906000	24.04	40.00	15.96	100.0	V	287.0	-18.9
115.651000	21.21	43.50	22.29	100.0	V	96.0	-19.9
227.637500	22.41	46.00	23.59	100.0	V	124.0	-18.2
325.025500	24.46	46.00	21.54	100.0	V	138.0	-15.6
929.190000	30.76	46.00	15.24	100.0	V	116.0	-4.7




1GHz-18GHz

Note: The highest waveform in the figure is Bluetooth Fundamental.

### EUT Information

EUT Name:	I/O Module
Model:	IQ5-IO-8DO-HOA-B
Test Mode:	BLE 1M_High channel
Order No/Sample No:	168376481/A003268712-005
Test Voltage::	120V/60Hz
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

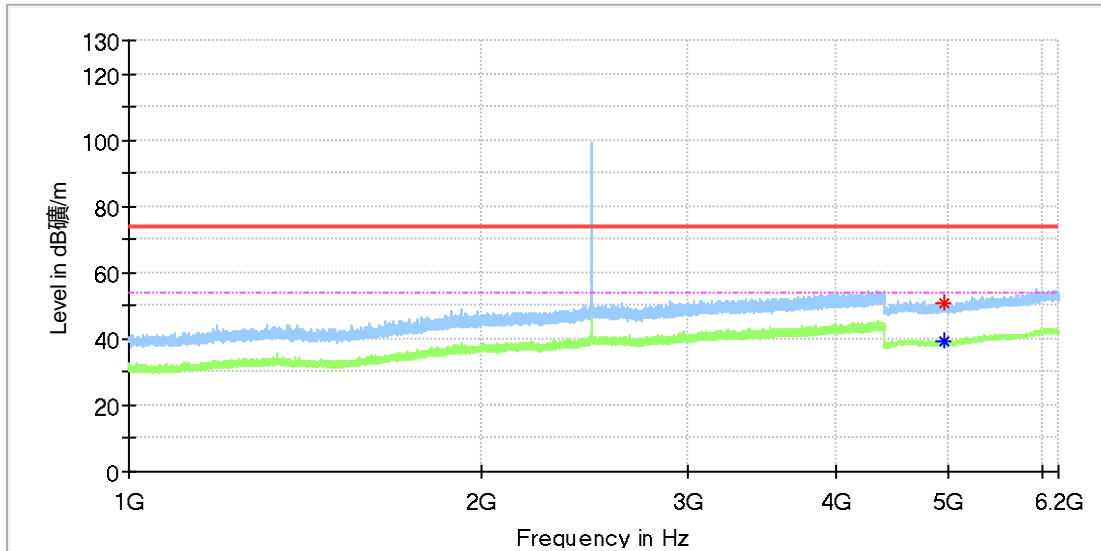


### Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4946.500000	50.76	---	74.00	23.24	100.0	H	353.0	11.8
4960.000000	---	39.59	54.00	14.41	100.0	H	196.0	11.8

### EUT Information

EUT Name:	I/O Module
Model:	IQ5-IO-8DO-HOA-B
Test Mode:	BLE 1M_High channel
Order No/Sample No:	168376481/A003268712-005
Test Voltage::	120V/60Hz
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

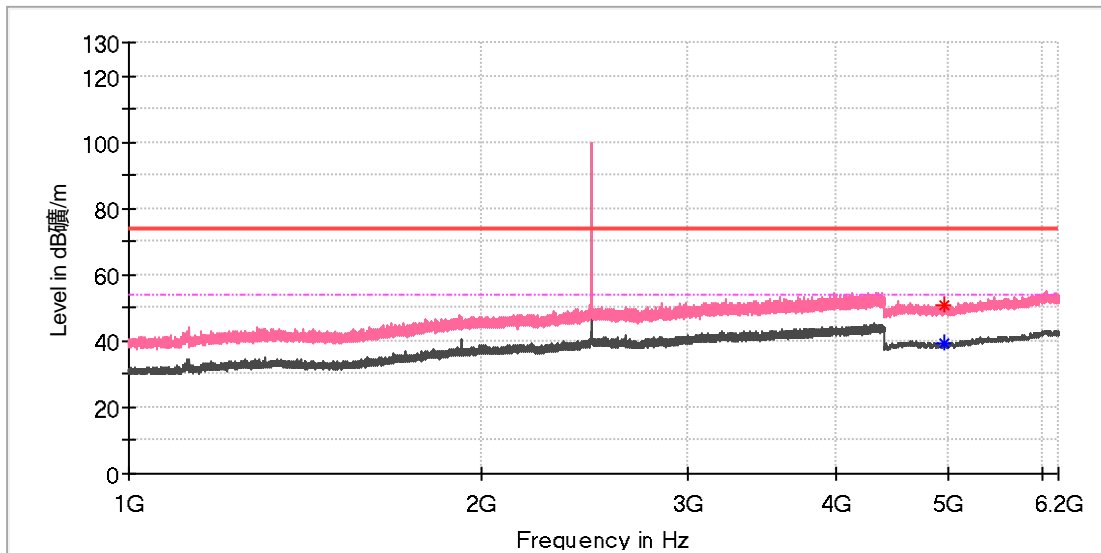


### Critical\_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4948.500000	50.78	---	74.00	23.22	100.0	V	276.0	11.8
4949.500000	---	39.29	54.00	14.71	100.0	V	143.0	11.8

### EUT Information

EUT Name:	I/O Module
Model:	IQ5-IO-8DO-HOA-B
Test Mode:	BLE 1M_High channel
Order No/Sample No:	168376481/A003268712-005
Test Voltage::	120V/60Hz
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

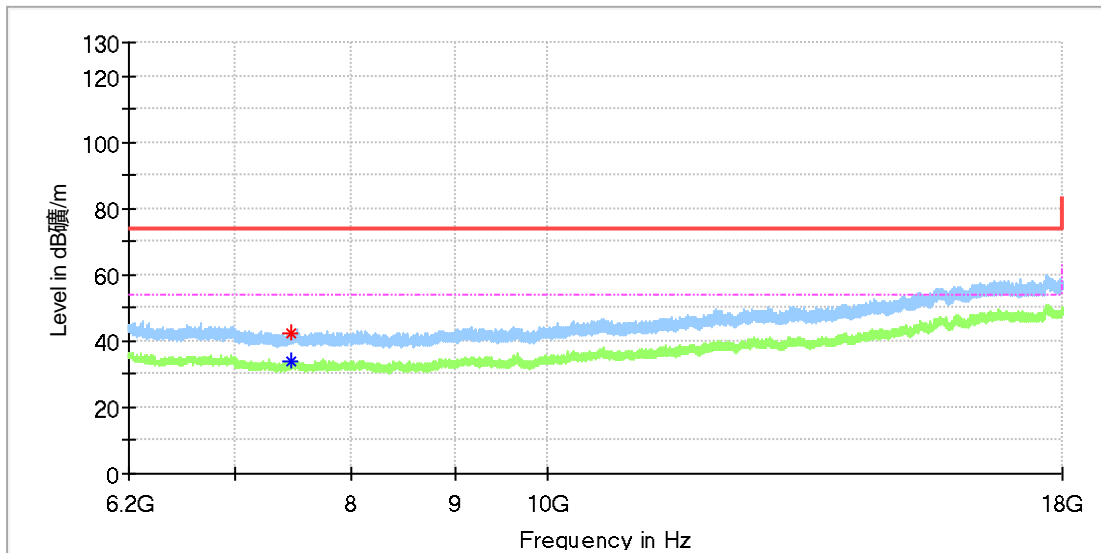


### Critical\_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7454.241667	42.46	---	74.00	31.54	100.0	H	92.0	8.5
7464.566667	---	33.66	54.00	20.34	100.0	H	287.0	8.6

### EUT Information

EUT Name:	I/O Module
Model:	IQ5-IO-8DO-HOA-B
Test Mode:	BLE 1M_High channel
Order No/Sample No:	168376481/A003268712-005
Test Voltage::	120V/60Hz
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

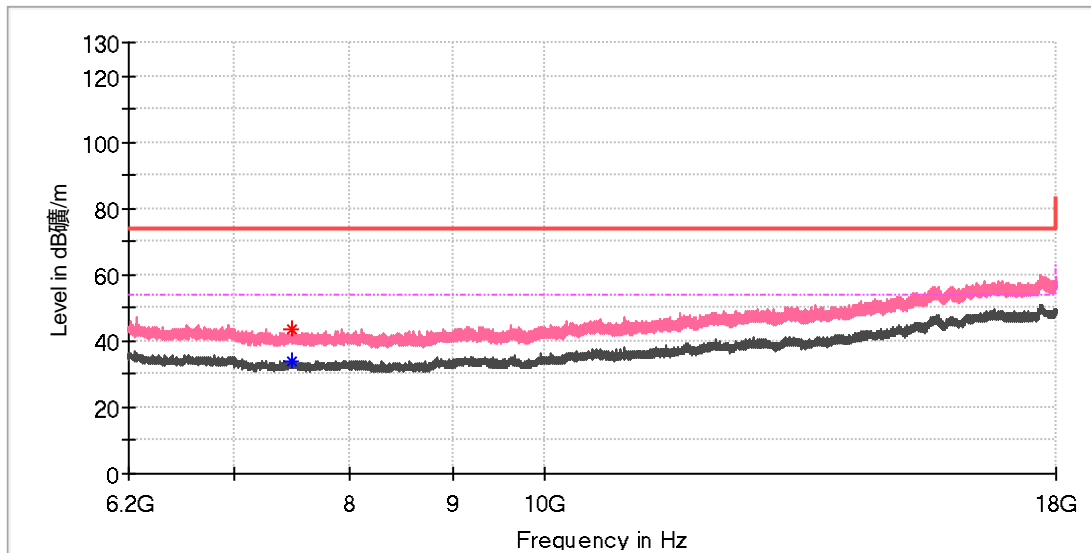


### Critical\_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7475.875000	43.59	---	74.00	30.41	100.0	V	258.0	8.6
7476.366667	---	33.95	54.00	20.05	100.0	V	86.0	8.6

### EUT Information

EUT Name:	I/O Module
Model:	IQ5-IO-8DO-HOA-B
Test Mode:	BLE 1M_Low channel
Order No/Sample No:	168376481/A003268712-005
Test Voltage::	120V/60Hz
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

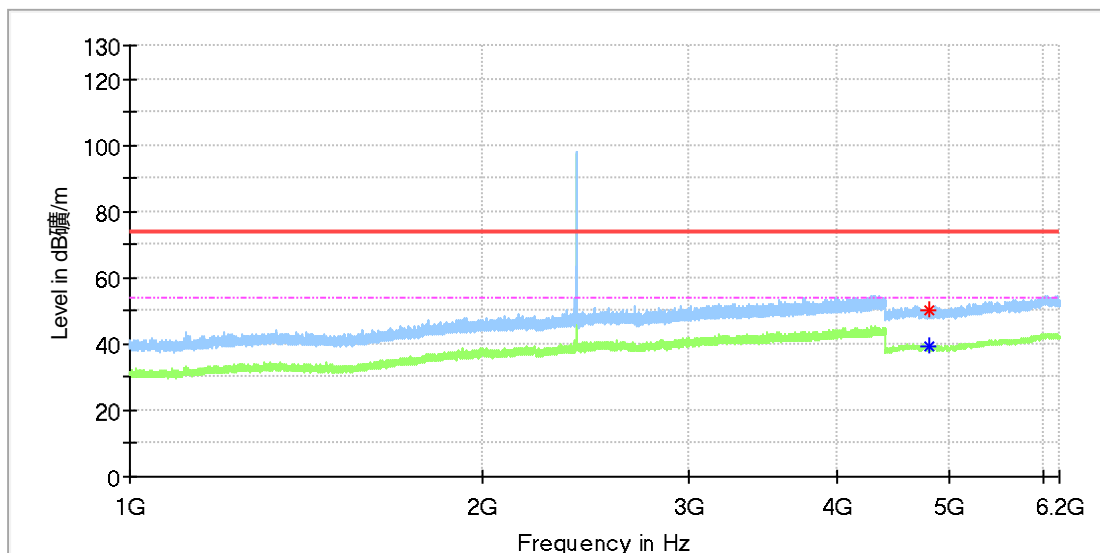


### Critical\_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4804.000000	---	39.45	54.00	14.55	100.0	H	200.0	11.8
4808.000000	50.21	---	74.00	23.79	100.0	H	276.0	11.8

### EUT Information

EUT Name:	I/O Module
Model:	IQ5-IO-8DO-HOA-B
Test Mode:	BLE 1M_Low channel
Order No/Sample No:	168376481/A003268712-005
Test Voltage::	120V/60Hz
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

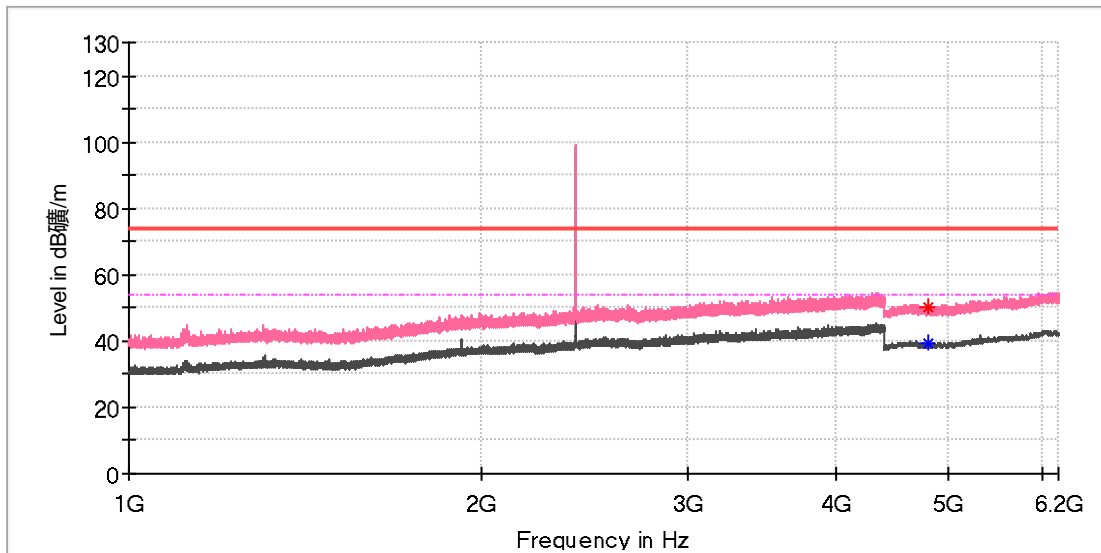


### Critical\_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4801.000000	---	39.25	54.00	14.75	100.0	V	158.0	11.8
4809.000000	50.26	---	74.00	23.74	100.0	V	334.0	11.8

### EUT Information

EUT Name:	I/O Module
Model:	IQ5-IO-8DO-HOA-B
Test Mode:	BLE 1M_Low channel
Order No/Sample No:	168376481/A003268712-005
Test Voltage::	120V/60Hz
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

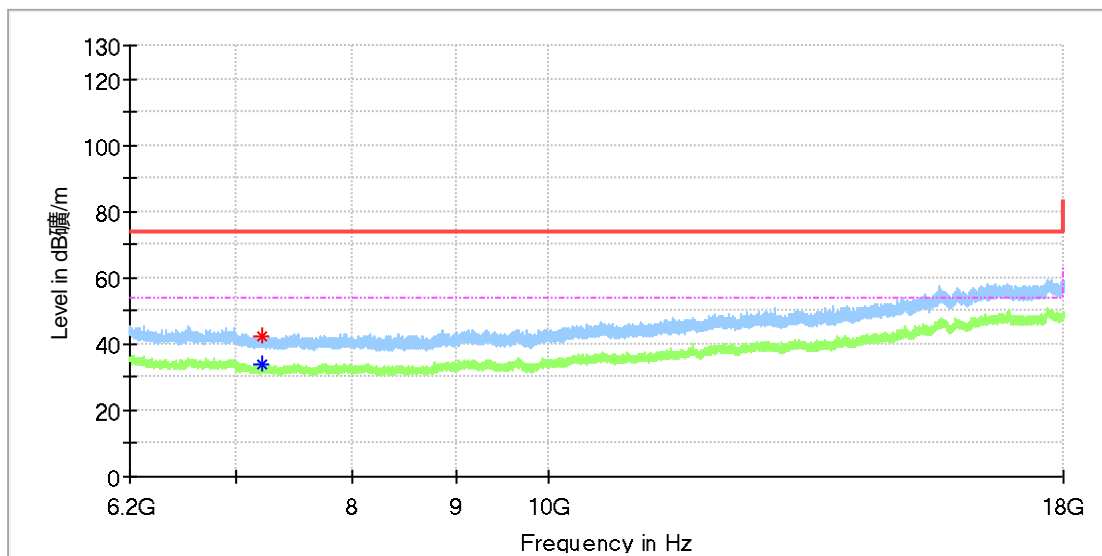


### Critical\_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7207.425000	---	33.69	54.00	20.31	100.0	H	86.0	8.8
7210.375000	42.55	---	74.00	31.45	100.0	H	212.0	8.7

### EUT Information

EUT Name:	I/O Module
Model:	IQ5-IO-8DO-HOA-B
Test Mode:	BLE 1M_Low channel
Order No/Sample No:	168376481/A003268712-005
Test Voltage::	120V/60Hz
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

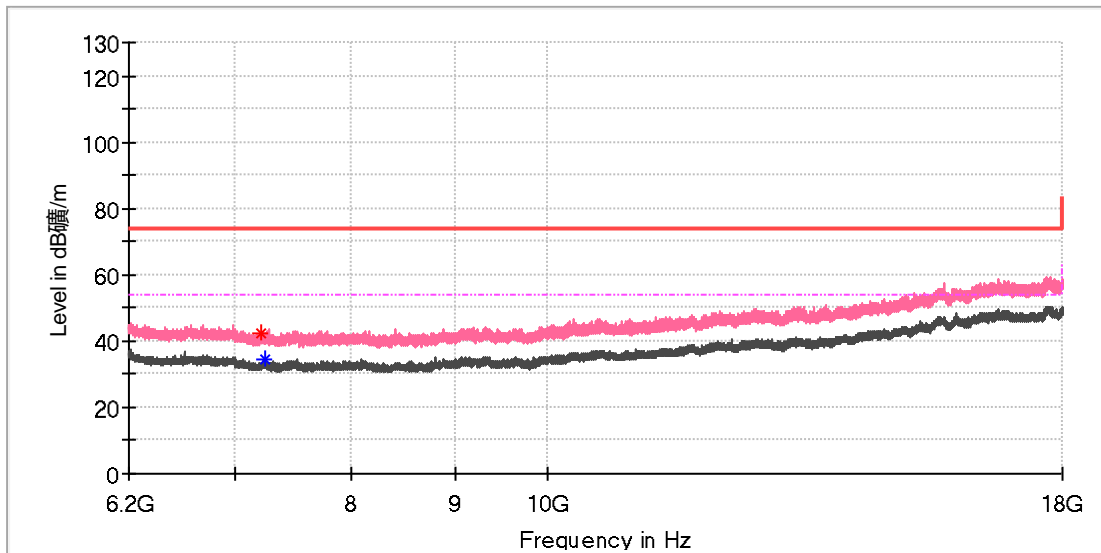


### Critical\_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7213.816667	42.36	---	74.00	31.64	100.0	V	96.0	8.7
7246.266667	---	34.44	54.00	19.56	100.0	V	292.0	8.6



### EUT Information

EUT Name:	I/O Module
Model:	IQ5-IO-8DO-HOA-B
Test Mode:	BLE 1M_Mid channel
Order No/Sample No:	168376481/A003268712-005
Test Voltage::	120V/60Hz
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

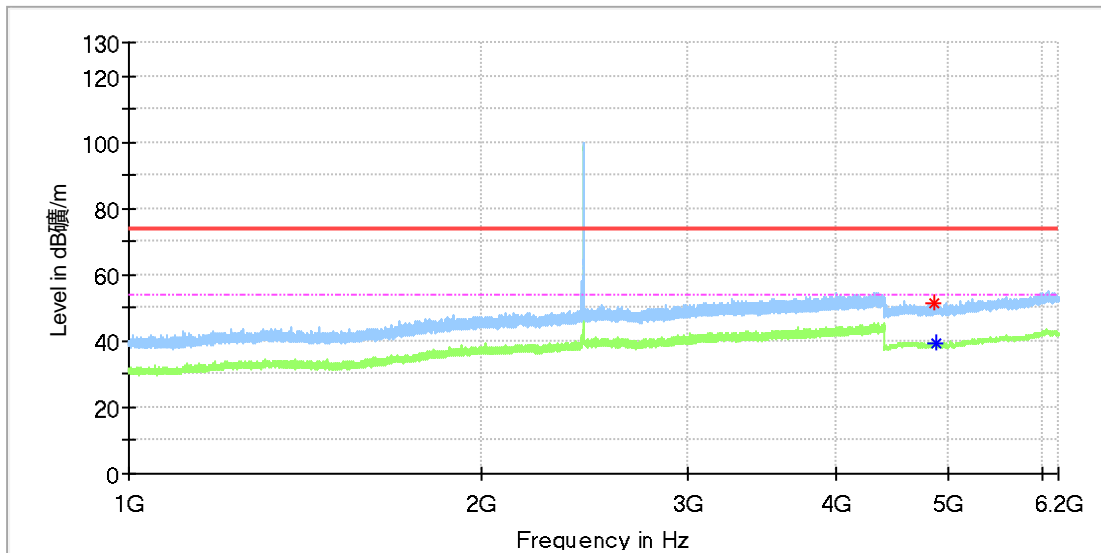


### Critical\_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4864.000000	51.28	---	74.00	22.72	100.0	H	218.0	11.8
4869.500000	---	39.49	54.00	14.51	100.0	H	118.0	11.8

### EUT Information

EUT Name:	I/O Module
Model:	IQ5-IO-8DO-HOA-B
Test Mode:	BLE 1M_Mid channel
Order No/Sample No:	168376481/A003268712-005
Test Voltage::	120V/60Hz
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

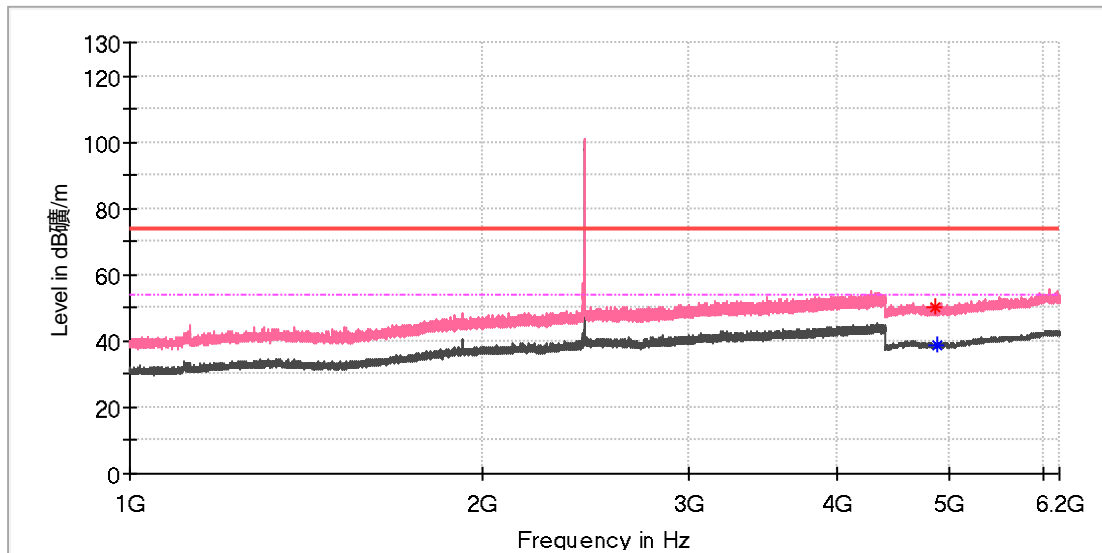


### Critical\_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4861.000000	50.39	---	74.00	23.61	100.0	V	315.0	11.8
4871.000000	---	38.95	54.00	15.05	100.0	V	258.0	11.8

### EUT Information

EUT Name:	I/O Module
Model:	IQ5-IO-8DO-HOA-B
Test Mode:	BLE 1M_Mid channel
Order No/Sample No:	168376481/A003268712-005
Test Voltage::	120V/60Hz
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

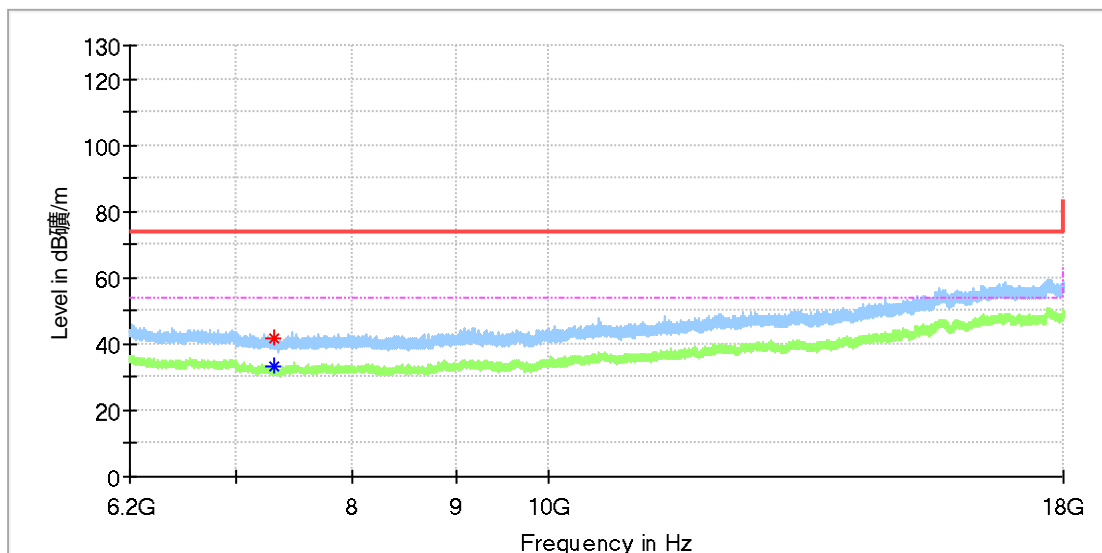


### Critical\_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7303.300000	---	33.22	54.00	20.78	100.0	H	0.0	8.3
7311.166667	41.66	---	74.00	32.34	100.0	H	180.0	8.2

### EUT Information

EUT Name:	I/O Module
Model:	IQ5-IO-8DO-HOA-B
Test Mode:	BLE 1M_Mid channel
Order No/Sample No:	168376481/A003268712-005
Test Voltage::	120V/60Hz
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

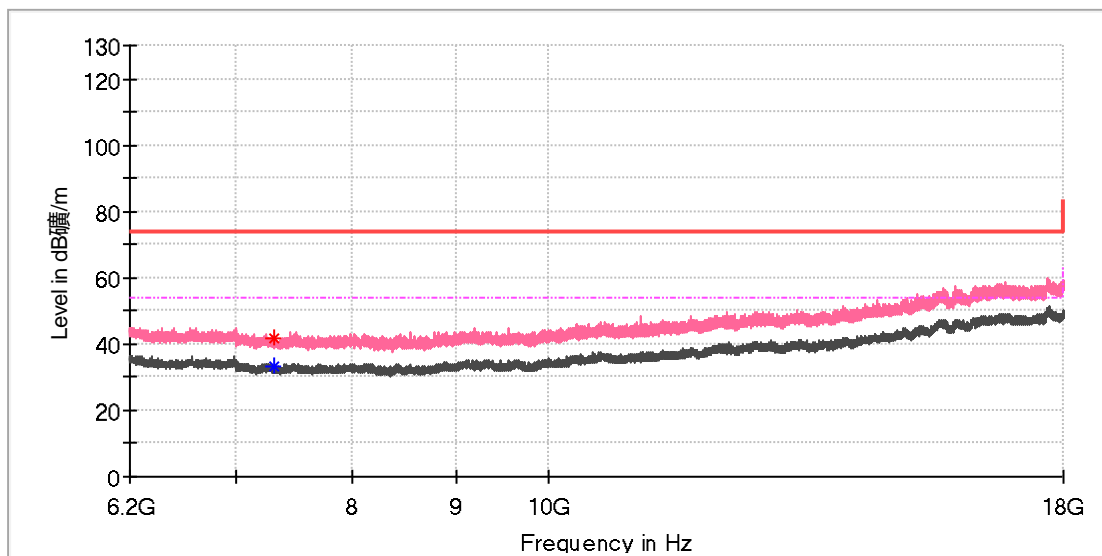


### Critical\_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7306.741667	---	33.55	54.00	20.45	100.0	V	342.0	8.3
7311.166667	41.93	---	74.00	32.07	100.0	V	263.0	8.2

## Appendix B.6: Test Results of Radiated Emissions in Restricted Bands

### EUT Information

EUT Name:	I/O Module
Model:	IQ5-IO-8DO-HOA-B
Test Mode:	BLE 1M_High channel
Order No/Sample No:	168376481/A003268712-005
Test Voltage::	120V/60Hz
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

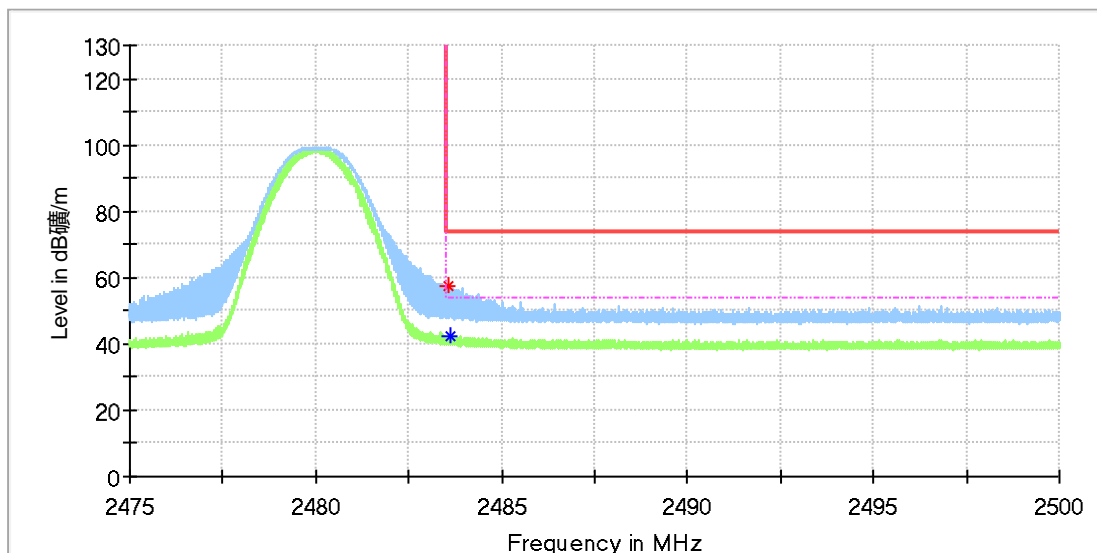


### Critical\_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.587500	57.62	---	74.00	16.38	100.0	H	136.0	7.4
2483.637500	---	42.44	54.00	11.56	100.0	H	136.0	7.4

### EUT Information

EUT Name:	I/O Module
Model:	IQ5-IO-8DO-HOA-B
Test Mode:	BLE 1M_High channel
Order No/Sample No:	168376481/A003268712-005
Test Voltage::	120V/60Hz
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

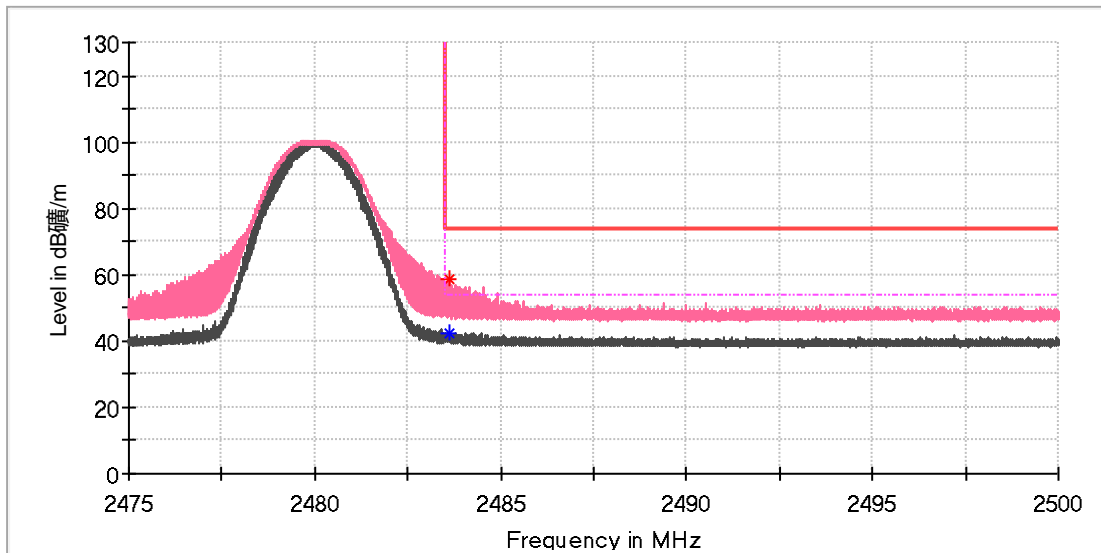


### Critical\_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.620000	58.75	---	74.00	15.25	100.0	V	63.0	7.4
2483.647500	---	42.54	54.00	11.46	100.0	V	63.0	7.4

### EUT Information

EUT Name:	I/O Module
Model:	IQ5-IO-8DO-HOA-B
Test Mode:	BLE 1M_Low channel
Order No/Sample No:	168376481/A003268712-005
Test Voltage::	120V/60Hz
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

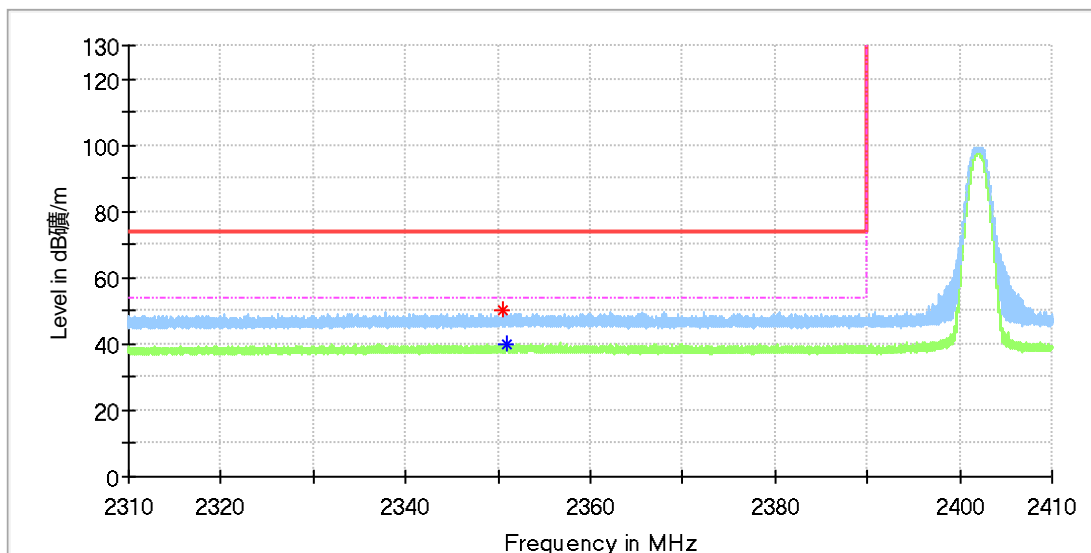


### Critical\_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2350.600000	50.11	---	74.00	23.89	100.0	H	304.0	6.9
2350.970000	---	39.85	54.00	14.15	100.0	H	317.0	6.9

### EUT Information

EUT Name:	I/O Module
Model:	IQ5-IO-8DO-HOA-B
Test Mode:	BLE 1M_Low channel
Order No/Sample No:	168376481/A003268712-005
Test Voltage::	120V/60Hz
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

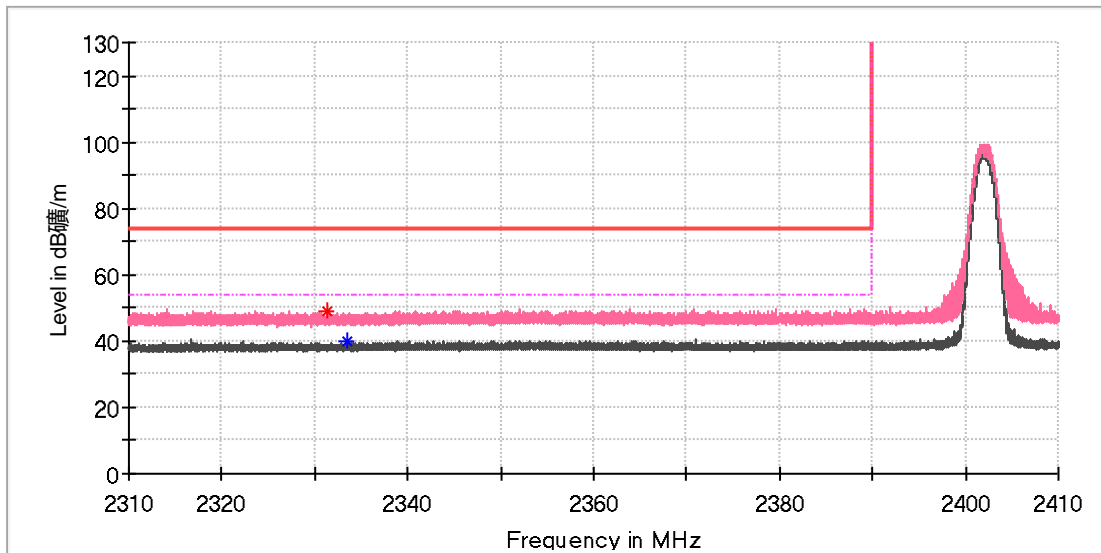

### Critical\_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2331.405000	48.74	---	74.00	25.26	100.0	V	320.0	6.7
2333.450000	---	39.75	54.00	14.25	100.0	V	285.0	6.7




## Appendix B.7: Test Plots of Conducted Emission on AC Mains

Normal Working with Bluetooth connected

### EUT Information

EUT Name:	I/O Module
Order No:	168376481(P00404422)
Model:	IQ5-IO-8DO-HOA-B
Test mode:	On, Normal working with Bluetooth connected
Test Voltage:	AC 120V/60Hz
Test By:/Review By:	Jeff Liao/Gary Chen
Test Standard:	FCC Part 15C
Tem./Hum./Pressure:	24.1°C/52.8%/101kPa
Remark:	SR2

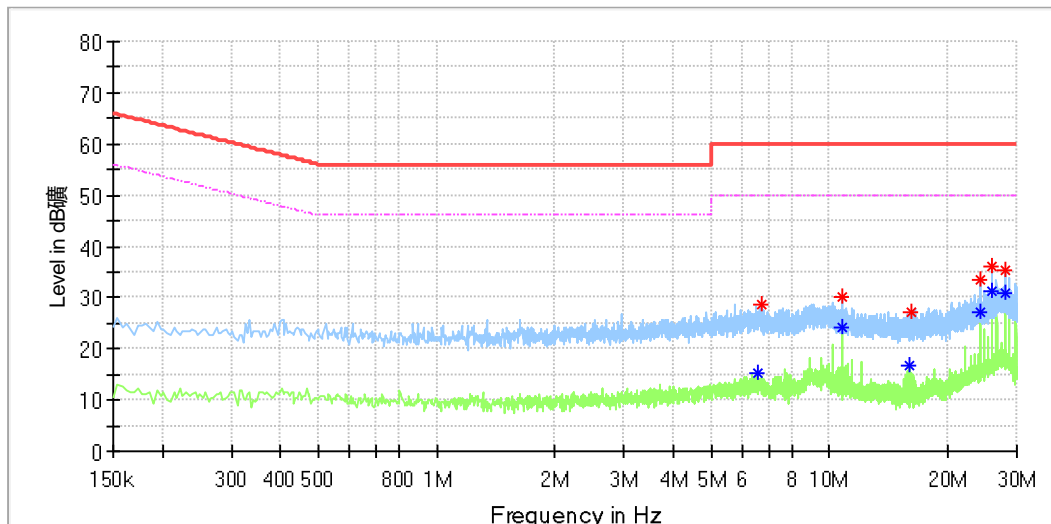


### Critical Freqs

Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
6.550000	---	15.09	50.00	34.91	L1	10.3
6.746000	28.63	---	60.00	31.37	L1	10.3
10.786000	30.23	---	60.00	29.77	L1	10.3
10.786000	---	24.06	50.00	25.94	L1	10.3
16.002000	---	16.76	50.00	33.24	L1	10.4
16.106000	27.02	---	60.00	32.98	L1	10.4
24.114000	---	27.05	50.00	22.95	L1	10.4
24.114000	33.65	---	60.00	26.35	L1	10.4
26.018000	36.23	---	60.00	23.77	L1	10.4
26.018000	---	31.17	50.00	18.83	L1	10.4
27.926000	35.46	---	60.00	24.54	L1	10.4
27.926000	---	31.04	50.00	18.96	L1	10.4

### EUT Information

EUT Name: I/O Module  
 Order No: 168376481(P00404422)  
 Model: IQ5-IO-8DO-HOA-B  
 Test mode: On, Normal working with Bluetooth connected  
 Test Voltage: AC 120V/60Hz  
 Test By:/Review By: Jeff Liao/Gary Chen  
 Test Standard: FCC Part 15C  
 Tem./Hum./Pressure: 24.1°C/52.8%/101kPa  
 Remark: SR2

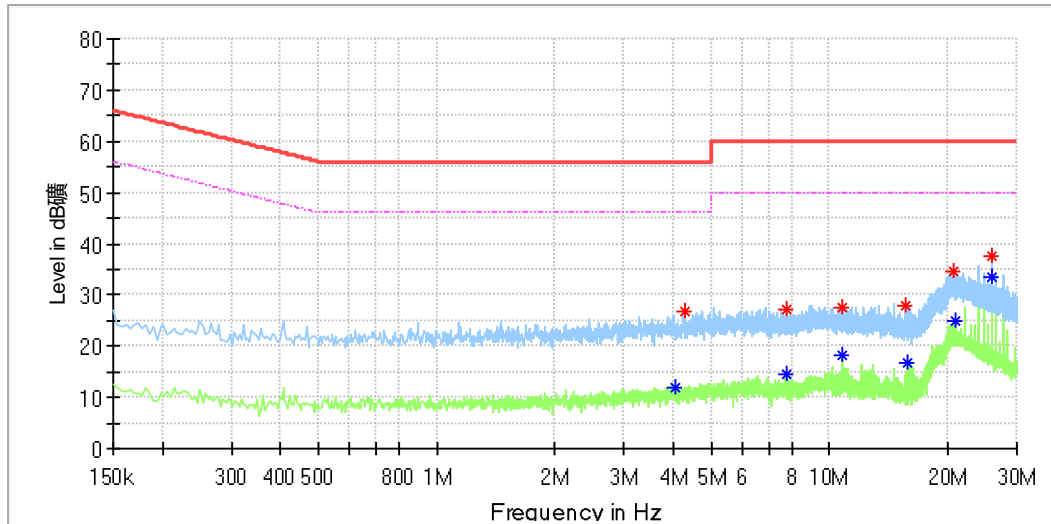


### Critical Freqs

Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
4.030000	---	12.07	46.00	33.93	N	9.9
4.290000	26.81	---	56.00	29.19	N	9.9
7.754000	---	14.40	50.00	35.60	N	10.0
7.754000	27.02	---	60.00	32.98	N	10.0
10.766000	---	18.20	50.00	31.80	N	10.0
10.766000	27.61	---	60.00	32.39	N	10.0
15.690000	27.99	---	60.00	32.01	N	10.1
15.798000	---	16.87	50.00	33.13	N	10.1
20.762000	34.75	---	60.00	25.25	N	10.3
20.834000	---	25.07	50.00	24.93	N	10.3
25.974000	37.58	---	60.00	22.42	N	10.3
25.974000	---	33.63	50.00	16.37	N	10.3

### EUT Information

EUT Name:	I/O Module
Order No:	168376481(P00404422)
Model:	IQ5-IO-8DO-HOA-B
Test mode:	On, Normal working with Bluetooth connected
Test Voltage:	AC 120V/60Hz
Test By:/Review By:	Jeff Liao/Gary Chen
Test Standard:	FCC Part 15C
Tem./Hum./Pressure:	24.1°C/52.8%/101kPa
Remark:	SR2

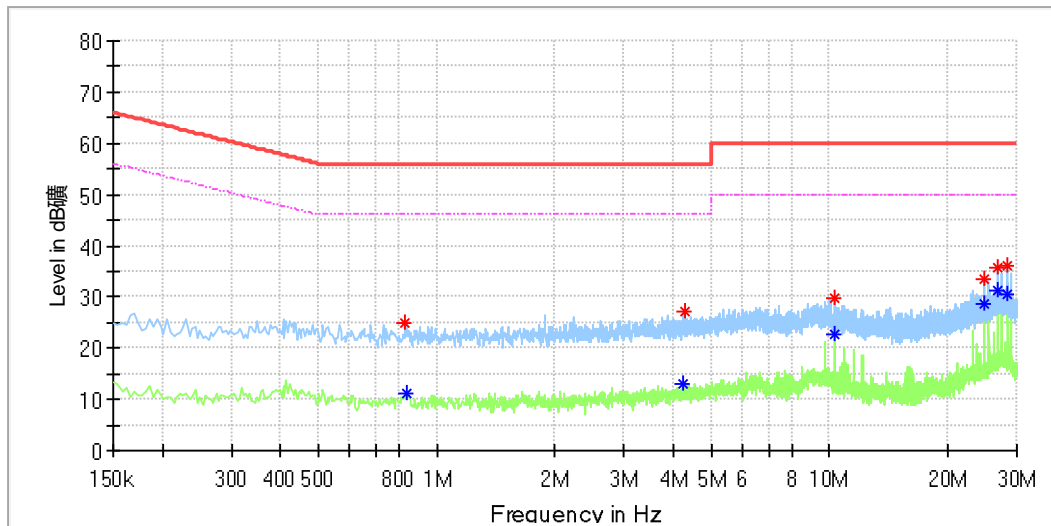


### Critical Freqs

Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.830000	24.82	---	56.00	31.18	L1	10.0
0.834000	---	11.31	46.00	34.69	L1	10.0
4.214000	---	13.14	46.00	32.86	L1	10.2
4.294000	26.99	---	56.00	29.01	L1	10.2
10.310000	---	22.54	50.00	27.46	L1	10.3
10.310000	29.73	---	60.00	30.27	L1	10.3
24.870000	---	28.70	50.00	21.30	L1	10.4
24.870000	33.53	---	60.00	26.47	L1	10.4
26.694000	---	31.41	50.00	18.59	L1	10.4
26.694000	35.69	---	60.00	24.31	L1	10.4
28.514000	36.18	---	60.00	23.82	L1	10.4
28.514000	---	30.47	50.00	19.53	L1	10.4

### EUT Information

EUT Name:	I/O Module
Order No:	168376481(P00404422)
Model:	IQ5-IO-8DO-HOA-B
Test mode:	On, Normal working with Bluetooth connected
Test Voltage:	AC 120V/60Hz
Test By:/Review By:	Jeff Liao/Gary Chen
Test Standard:	FCC Part 15C
Tem./Hum./Pressure:	24.1°C/52.8%//101kPa
Remark:	SR2

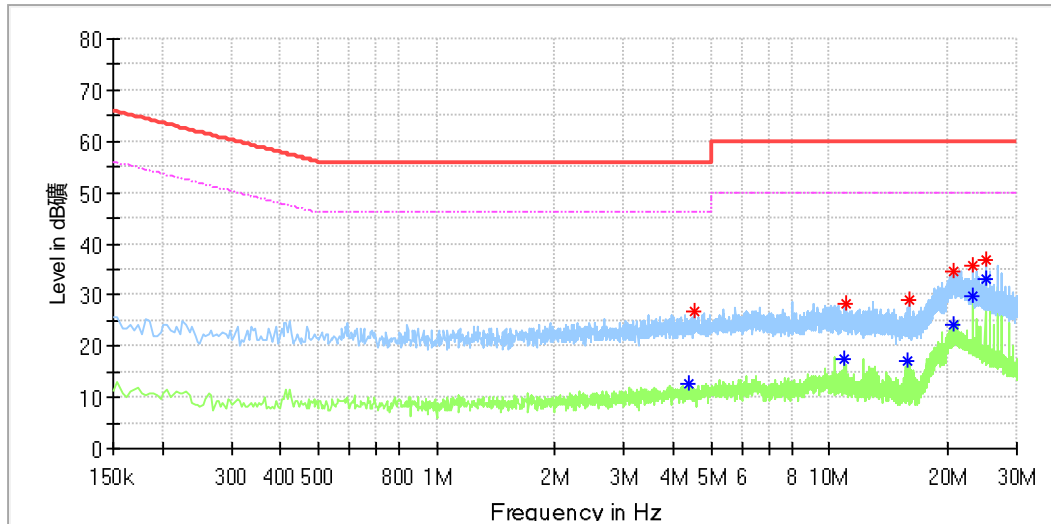

### Critical Freqs

Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
4.382000	---	12.76	46.00	33.24	N	9.9
4.546000	26.70	---	56.00	29.30	N	9.9
10.874000	---	17.33	50.00	32.67	N	10.0
10.990000	28.33	---	60.00	31.67	N	10.0
15.798000	---	17.17	50.00	32.83	N	10.1
15.998000	28.91	---	60.00	31.09	N	10.2
20.662000	---	24.18	50.00	25.82	N	10.3
20.662000	34.66	---	60.00	25.34	N	10.3
23.098000	---	29.59	50.00	20.41	N	10.3
23.098000	35.73	---	60.00	24.27	N	10.3
24.922000	36.92	---	60.00	23.08	N	10.3
24.922000	---	33.19	50.00	16.81	N	10.3