

InnoComm Mobile Technology Corporation
3F, No. 6, Hsin Ann Rd., Hsinchu Science Park, Hsinchu 30078, Taiwan
TEL: +886-3-5781868 FAX: +886-3-5781187

BT4.0 Low Energy Module
User Manual

FCC ID: YAIBM05-AN


Introduction

This document describes pin definition, mechanical drawing and reflow data of Bluetooth Low Energy Module and hope it can help designer to design in easier and manufacturing smoothly.


Pin Definition

Pin #	Pin Name	Direction	Voltage	Description
1	VDD	I	1.8V to 3.3V	Input power can range from 1.8V to 3.3V
2	VSS	I	GND	Ground
3	TEST0	I/O	1.8V to 3.3V	Mfg Test pin 0; MODE "POINTER". Internally pulled-up (active low)
4	TEST1	I/O	1.8V to 3.3V	Mfg Test pin 1; MODE "JOYSTICK". Internally pulled-up (active low)
5	SDA	I/O	1.8V to 3.3V	I2C data to interface with sensors (gyro & accelerometer) for relative motion. May also interface to additional I2C memory.
6	SCL	O	1.8V to 3.3V	I2C clock to interface with sensors (gyro & accelerometer) for relative motion. May also interface to additional I2C memory.
7	TEST2	I/O	1.8V to 3.3V	Mfg Test pin 2
8	GPIO_2	I/O	1.8V to 3.3V	Interrupt from I2C accelerometer. Internally pulled-up.
9	GPIO_3	I/O	1.8V to 3.3V	Interrupt from I2C gyro. Internally pulled-up.
10	GPIO_0	I/O	1.8V to 3.3V	"A" button. Internally pulled-up.
11	GPIO_1	I/O	1.8V to 3.3V	"B" button. Internally pulled-up.
12	GPIO_4	I/O	1.8V to 3.3V	General I/O - UNUSED. Internally pulled-up.
13	GPIO_5	I/O	1.8V to 3.3V	"HOME" button. Internally pulled-up.
14	GPIO_6	I/O	1.8V to 3.3V	"HELP" button. Internally pulled-up.
15	GPIO_7	I/O	1.8V to 3.3V	"PAUSE" button. Internally pulled-up.
16	GPIO_10	I/O	1.8V to 3.3V	LED for player "1".
17	GPIO_11	I/O	1.8V to 3.3V	LED for player "2".
18	ADC_0	I	1.8V to 3.3V	ADC input for X direction on joystick.
19	ADC_1	I	1.8V to 3.3V	ADC input for Y direction on joystick.
20	ADC_2	I	1.8V to 3.3V	ADC input for battery voltage.
21	GPIO_8	I/O	1.8V to 3.3V	Power LED.
22	GPIO_9	I/O	1.8V to 3.3V	IR LED.
23	GPIO_12	I/O	1.8V to 3.3V	General I/O - UNUSED. Internally pulled-up.

Mechanical Drawing

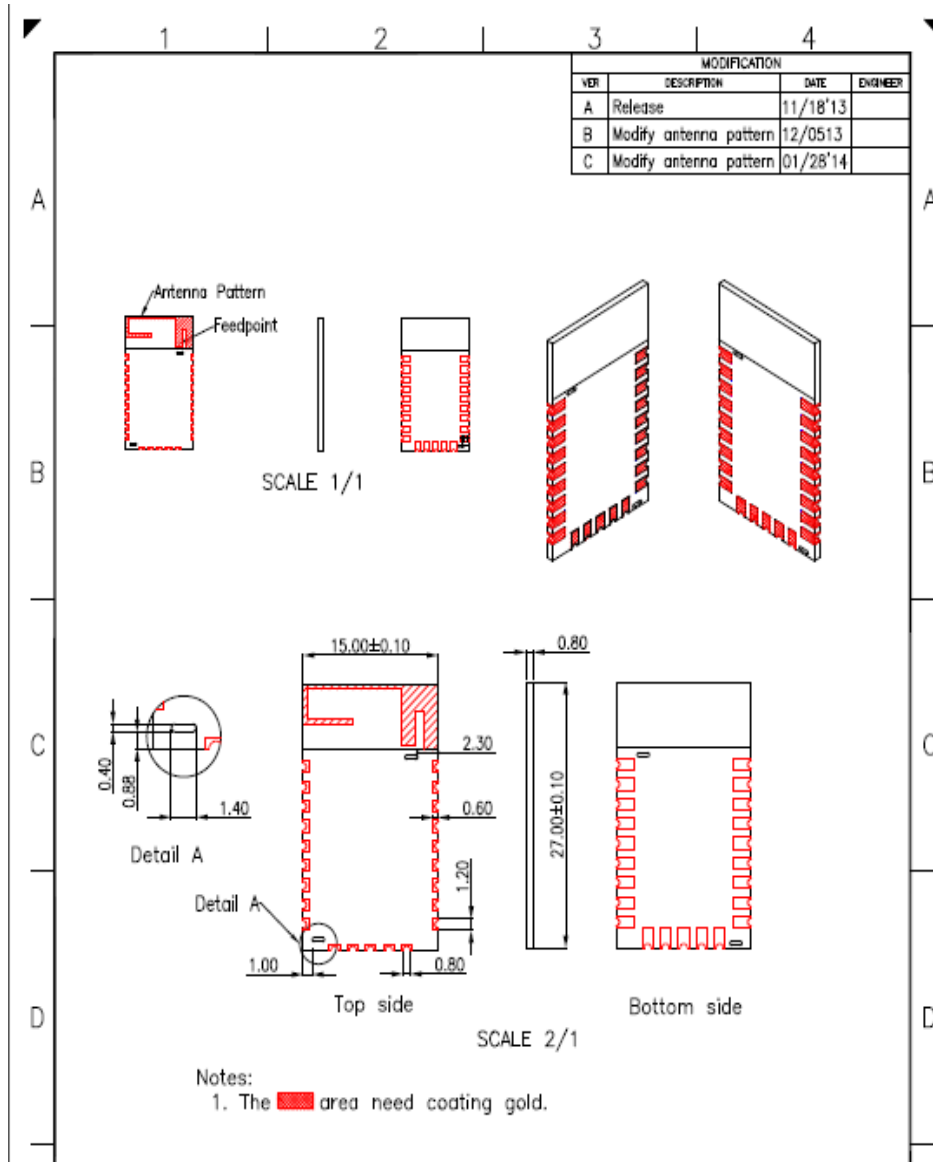

Reflow data

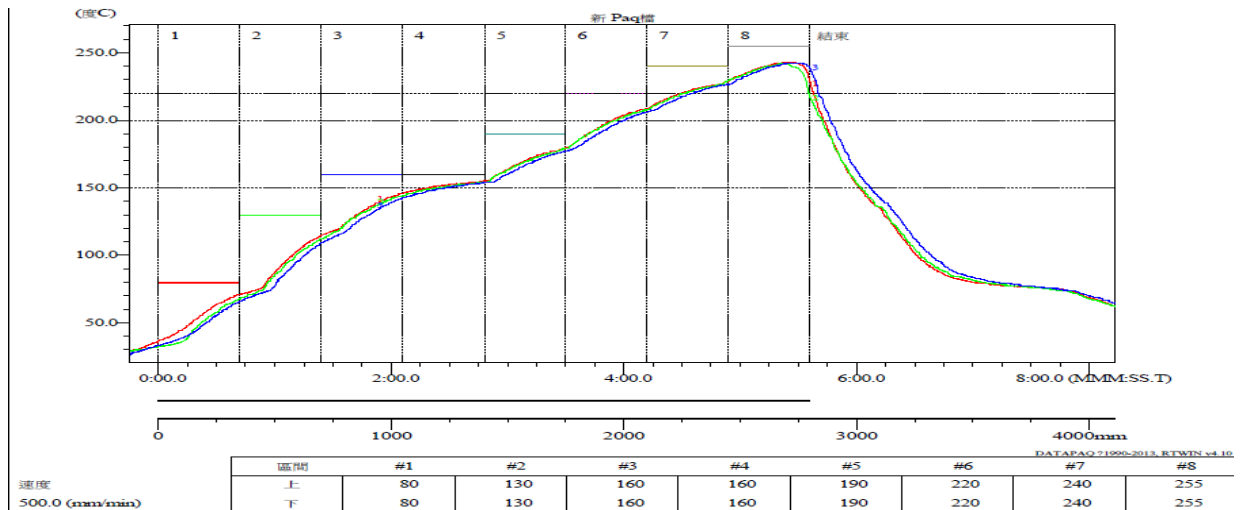

Federal Communication Commission Interference Statement

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

Radiation Exposure Statement:

The product comply with the FCC portable RF exposure limit set forth for an uncontrolled environment and are safe for intended operation as described in this manual. The further RF exposure reduction can be achieved if the product can be kept as far as possible from the user body or set the device to lower output power if such function is available.

This device is intended only for OEM integrators under the following conditions:

- 1) The transmitter module may not be co-located with any other transmitter or antenna.

As long as 1 condition above is met, further transmitter test will not be required. However, the OEM integrator is still responsible for testing their end-product for any additional compliance requirements required with this module installed

IMPORTANT NOTE: In the event that these conditions can not be met (for example certain laptop configurations or co-location with another transmitter), then the FCC authorization is no longer considered valid and the FCC ID can not be used on the final product. In these circumstances, the OEM integrator will be responsible for re-evaluating the end product (including the transmitter) and obtaining a separate FCC authorization.

End Product Labeling

The product can be kept as far as possible from the user body or set the device to lower output power if such function is available. The final end product must be labeled in a visible area with the following: "Contains FCC ID: YAIBM05-AN". The grantee's FCC ID can be used only when all FCC compliance requirements are met.

Manual Information To the End User

The OEM integrator has to be aware not to provide information to the end user regarding how to install or remove this RF module in the user's manual of the end product which integrates this module.

The end user manual shall include all required regulatory information/warning as show in this manual.