



# TEST REPORT

**Report Reference No.**..... : **TRE1711016601** R/C.....: 43547  
**FCC ID**..... : **YAMMD62XVHF**  
**Applicant's name**..... : **Hytera Communications Corporation Limited**  
**Address**..... : Hytera Tower, Hi-Tech Industrial Park North,9108# Beihuan Road, Nanshan District, Shenzhen, China  
**Manufacturer**..... : Hytera Communications Corporation Limited  
**Address**..... : Hytera Tower, Hi-Tech Industrial Park North,9108# Beihuan Road, Nanshan District, Shenzhen, China  
**Test item description** ..... : **Digital Mobile Radio**  
**Trade Mark** ..... : Hytera  
**Model/Type reference**..... : MD625 VHF  
**Listed Model(s)**..... : MD622 VHF,MD626 VHF,MD628 VHF  
**Standard** ..... : **FCC CFR Title 47 Part 15 Subpart C Section 15.247**  
**Date of receipt of test sample**..... : Nov. 24, 2017  
**Date of testing**..... : Nov. 27, 2017 – Jan. 29, 2018  
**Date of issue**..... : Jan. 29, 2018  
**Result**..... : **PASS**

Compiled by  
 ( Position+Printed name+Signature): File administrators Shayne Zhu

*Shayne Zhu*

Supervised by  
 (Position+Printed name+Signature): Project Engineer Cary Luo

*Cary Luo*

Approved by  
 (Position+Printed name+Signature): RF Manager Hans Hu

*Hans Hu*

**Testing Laboratory Name** ..... : **Shenzhen Huatongwei International Inspection Co., Ltd.**  
**Address**..... : 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

**Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

*The test report merely correspond to the test sample.*

## Contents

<b>1.</b>	<b><u>TEST STANDARDS AND REPORT VERSION</u></b>	<b>3</b>
1.1.	Test Standards	3
1.2.	Report version information	3
<b>2.</b>	<b><u>TEST DESCRIPTION</u></b>	<b>4</b>
<b>3.</b>	<b><u>SUMMARY</u></b>	<b>5</b>
3.1.	Client Information	5
3.2.	Product Description	5
3.3.	Operation state	6
3.4.	EUT configuration	6
3.5.	Modifications	6
<b>4.</b>	<b><u>TEST ENVIRONMENT</u></b>	<b>7</b>
4.1.	Address of the test laboratory	7
4.2.	Test Facility	7
4.3.	Environmental conditions	8
4.4.	Statement of the measurement uncertainty	8
4.1.	Equipments Used during the Test	9
<b>5.</b>	<b><u>TEST CONDITIONS AND RESULTS</u></b>	<b>11</b>
5.1.	Antenna requirement	11
5.2.	Conducted Emissions (AC Main)	12
5.3.	Conducted Peak Output Power	13
5.4.	20 dB Bandwidth	17
5.5.	Carrier Frequencies Separation	21
5.6.	Hopping Channel Number	23
5.7.	Dwell Time	25
5.8.	Pseudorandom Frequency Hopping Sequence	32
5.9.	Restricted band (radiated)	33
5.10.	Band edge and Spurious Emissions (conducted)	35
5.11.	Spurious Emissions (radiated)	51
<b>6.</b>	<b><u>TEST SETUP PHOTOS</u></b>	<b>57</b>
<b>7.</b>	<b><u>EXTERANAL AND INTERNAL PHOTOS</u></b>	<b>58</b>

## **1. TEST STANDARDS AND REPORT VERSION**

### **1.1. Test Standards**

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

[ANSI C63.10-2013](#): American National Standard for Testing Unlicensed Wireless Devices

### **1.2. Report version information**

Revision No.	Date of issue	Description
N/A	2018-01-29	Original

## **2. TEST DESCRIPTION**

<b>Test Item</b>	<b>Section in CFR 47</b>	<b>Result</b>	<b>Test Engineer</b>
Antenna Requirement	15.203/15.247 (c)	Pass	Jiuru Pan
AC Power Line Conducted Emissions	15.207	N/A	N/A
Conducted Peak Output Power	15.247 (b)(1)	Pass	Jiuru Pan
20 dB Bandwidth	15.247 (a)(1)	Pass	Jiuru Pan
Carrier Frequencies Separation	15.247 (a)(1)	Pass	Jiuru Pan
Hopping Channel Number	15.247 (a)(1)	Pass	Jiuru Pan
Dwell Time	15.247 (a)(1)	Pass	Jiuru Pan
Pseudorandom Frequency Hopping Sequence	15.247(b)(4)	Pass	Jiuru Pan
Restricted band	15.247(d)/15.205	Pass	Jiuru Pan
Radiated Emissions	15.247(d)/15.209	Pass	Jiuru Pan

Note: The measurement uncertainty is not included in the test result.

### 3. SUMMARY

#### 3.1. Client Information

Applicant:	Hytera Communications Corporation Limited
Address:	Hytera Tower, Hi-Tech Industrial Park North,9108# Beihuan Road, Nanshan District, Shenzhen, China
Manufacturer:	Hytera Communications Corporation Limited
Address:	Hytera Tower, Hi-Tech Industrial Park North,9108# Beihuan Road, Nanshan District, Shenzhen, China

#### 3.2. Product Description

Name of EUT:	Digital Mobile Radio
Trade Mark:	Hytera
Model No.:	MD625 VHF
Listed Model(s):	MD622 VHF,MD626 VHF,MD628 VHF
Power supply:	DC 13.6V
Adapter information:	-
Hardware version:	A
Software version:	V1.01.13.001
<b>Bluetooth</b>	
Version:	Supported BT4.0+EDR
Modulation:	GFSK, $\pi/4$ DQPSK, 8DPSK
Operation frequency:	2402MHz~2480MHz
Channel number:	79
Channel separation:	1MHz
Antenna type:	Integral Antenna
Antenna gain:	0dBi

### 3.3. Operation state

#### ➤ Test frequency list

According to section 15.31(m), regards to the operating frequency range over 10 MHz, must select three channel which were tested. the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, please see the above gray bottom.

Channel	Frequency (MHz)
00	2402
01	2403
⋮	⋮
39	2441
⋮	⋮
77	2479
78	2480

#### ➤ TEST MODE

For RF test items:
The engineering test program was provided and enabled to make EUT continuous transmit
For AC power line conducted emissions:
The EUT was set to connect with the Bluetooth instrument under large package sizes transmission.
For Radiated suprious emissions test item:
The EUT in each of three orthogonal axis emissions had been tested ,but only the worst case (X axis) data recorded in the report.

### 3.4. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- - supplied by the manufacturer
- - supplied by the lab

/	Manufacturer:	/
	Model No.:	/
/	Manufacturer:	/
	Model No.:	/

### 3.5. Modifications

No modifications were implemented to meet testing criteria.

## **4. TEST ENVIRONMENT**

### **4.1. Address of the test laboratory**

Laboratory: Shenzhen Huatongwei International Inspection Co., Ltd.

Address: 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

### **4.2. Test Facility**

#### **CNAS-Lab Code: L1225**

Shenzhen Huatongwei International Inspection Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories.

#### **A2LA-Lab Cert. No.: 3902.01**

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

#### **FCC-Registration No.: 762235**

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration No. 762235.

#### **IC-Registration No.: 5377B-1**

Two 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 5377B-1.

#### **ACA**

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our A2LA accreditation.

### 4.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15~35°C
Relative Humidity:	30~60 %
Air Pressure:	950~1050mba

### 4.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors in calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report according to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the Shenzhen Huatongwei International Inspection Co., Ltd. quality system according to ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Here after the best measurement capability for Shenzhen Huatongwei International Inspection Co., Ltd. is reported:

Test Items	Measurement Uncertainty	Notes
Transmitter power conducted	0.57 dB	(1)
Transmitter power Radiated	2.20 dB	(1)
Conducted spurious emissions 9kHz~40GHz	1.60 dB	(1)
Radiated spurious emissions 9kHz~40GHz	2.20 dB	(1)
Conducted Emissions 9kHz~30MHz	3.39 dB	(1)
Radiated Emissions 30~1000MHz	4.24 dB	(1)
Radiated Emissions 1~18GHz	5.16 dB	(1)
Radiated Emissions 18~40GHz	5.54 dB	(1)
Occupied Bandwidth	-----	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.



#### 4.1. Equipments Used during the Test

Conducted Emissions						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. (mm-dd-yy)	Next Cal. (mm-dd-yy)
1	EMI Test Receiver	R&S	ESCI	101247	11/11/2017	11/10/2018
2	Artificial Mains	SCHWARZBECK	NNLK 8121	573	11/11/2017	11/10/2018
3	2-Line V-Network	R&S	ESH3-Z5	100049	11/11/2017	11/10/2018
4	Pulse Limiter	R&S	ESH3-Z2	101488	11/11/2017	11/10/2018
5	RF Connection Cable	HUBER+SUHNER	EF400	N/A	11/21/2017	11/20/2018
6	Test Software	R&S	ES-K1	N/A	N/A	N/A

Radiated Emissions						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. (mm-dd-yy)	Next Cal. (mm-dd-yy)
1	EMI Test Receiver	R&S	ESCI	101247	11/11/2017	11/10/2018
2	Loop Antenna	R&S	HFH2-Z2	100020	11/20/2017	11/19/2018
3	Ultra-Broadband Antenna	SCHWARZBECK	VULB9163	538	4/5/2017	4/4/2018
4	Preamplifier	SCHWARZBECK	BBV 9743	9743-0022	10/18/2017	10/17/2018
5	RF Connection Cable	HUBER+SUHNER	RE-7-FL	N/A	11/21/2017	11/20/2018
6	EMI Test Software	R&S	ESK1	N/A	N/A	N/A
7	Spectrum Analyzer	R&S	FSP40	100597	11/11/2017	11/10/2018
8	Horn Antenna	SCHWARZBECK	9120D	1011	3/27/2017	3/26/2018
9	Horn Antenna	SCHWARZBECK	BBHA9170	25841	3/27/2017	3/26/2018
10	Broadband Preamplifier	SCHWARZBECK	BBV 9718	9718-248	10/18/2017	10/17/2018
11	High pass filter	Compliance Direction systems	BSU-6	34202	11/11/2017	11/10/2018
12	RF Connection Cable	HUBER+SUHNER	RE-7-FH	N/A	11/21/2017	11/20/2018
13	EMI Test Software	Audix	E3	N/A	N/A	N/A
14	Turntable	MATURO	TT2.0	/	N/A	N/A
15	Antenna Mast	MATURO	TAM-4.0-P	/	N/A	N/A

<b>RF Conducted Test</b>						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. (mm-dd-yy)	Next Cal. (mm-dd-yy)
1	Spectrum Analyzer	R&S	FSV40	100048	11/11/2017	11/10/2018
2	EXA Signal Analyzer	Agilent	N9020A	184247	9/22/2017	9/21/2018
3	Power Meter	Agilent	U2021XA	178231	9/22/2017	9/21/2018
4	OSP	R&S	OSP120	101317	N/A	N/A

The Cal.Interval was one year.

## 5. TEST CONDITIONS AND RESULTS

### 5.1. Antenna requirement

#### Requirement

##### **FCC CFR Title 47 Part 15 Subpart C Section 15.203:**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

##### **FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1)(i):**

(i) Systems operating in the 2400~2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

#### Test Result:

**Passed**       **Not Applicable**

The directional gain of the antenna less than 0 dBi, please refer to the below antenna photo.



## 5.2. Conducted Emissions (AC Main)


### LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\* Decreases with the logarithm of the frequency.

### TEST CONFIGURATION

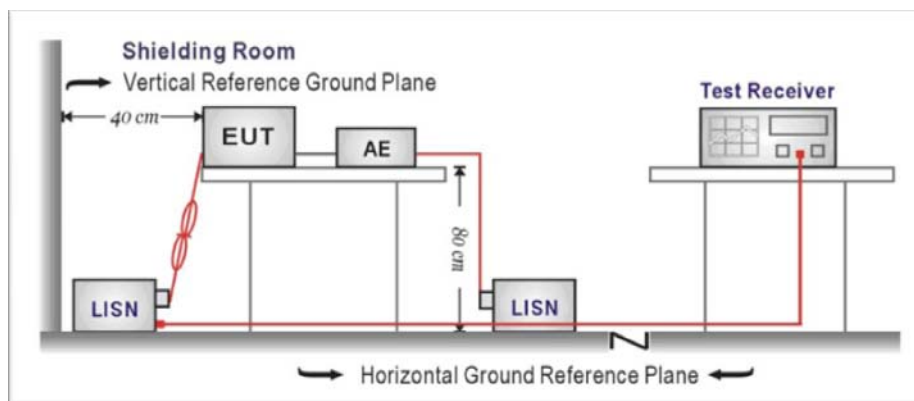

### TEST PROCEDURE

1. The EUT was setup according to ANSI C63.10:2013 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedances stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment.
4. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
7. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
8. During the above scans, the emissions were maximized by cable manipulation.

### TEST RESULTS


Passed       Not Applicable

### 5.3. Conducted Peak Output Power

#### LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (b)(1): For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

#### TEST CONFIGURATION

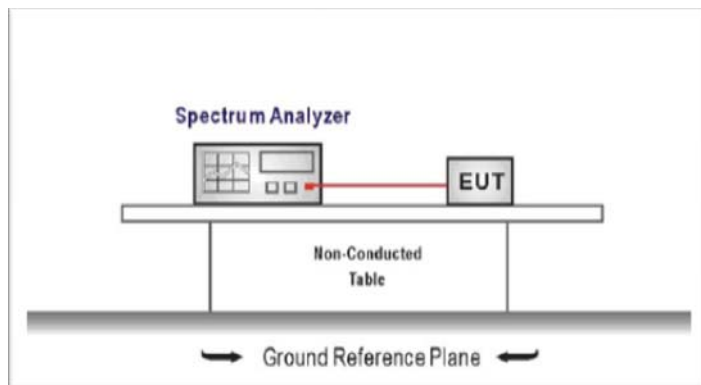

#### TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the pathloss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:  
Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel  
RBW  $\geq$  the 20 dB bandwidth of the emission being measured, VBW  $\geq$  RBW  
Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.

#### TEST MODE:




Please refer to the clause 3.3




#### TEST RESULTS

Passed       Not Applicable

Modulation type	Channel	Output power (dBm)	Limit (dBm)	Result
GFSK	00	4.93	$\leq 30.00$	Pass
	39	6.39		
	78	7.50		
$\pi/4$ DQPSK	00	3.99	$\leq 21.00$	Pass
	39	5.86		
	78	6.82		
8DPSK	00	4.25	$\leq 21.00$	Pass
	39	5.94		
	78	6.94		

Modulation Type:		GFSK
CH00	<p>Agilent Spectrum Analyzer - Sweep SA          Center Freq 2.40200000 GHz          #Avg Type: RMS          Avg/Hold: 500/500          Ref Offset 0.5 dB          Ref 20.00 dBm          Mkr1 2.402 190 GHz          4.931 dBm          Center 2.402000 GHz          #Res BW 1.0 MHz          #VBW 3.0 MHz          Span 5.000 MHz          Sweep 1.000 ms (1001 pts)</p>	<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.40200000 GHz</p> <p>Start Freq 2.399500000 GHz</p> <p>Stop Freq 2.404500000 GHz</p> <p>CF Step 500.000 kHz Auto Man</p> <p>Freq Offset 0 Hz</p>
CH39	<p>Agilent Spectrum Analyzer - Sweep SA          Center Freq 2.44100000 GHz          #Avg Type: RMS          Avg/Hold: 500/500          Ref Offset 0.5 dB          Ref 20.00 dBm          Mkr1 2.440 840 GHz          6.389 dBm          Center 2.441000 GHz          #Res BW 1.0 MHz          #VBW 3.0 MHz          Span 5.000 MHz          Sweep 1.000 ms (1001 pts)</p>	<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.44100000 GHz</p> <p>Start Freq 2.438500000 GHz</p> <p>Stop Freq 2.443500000 GHz</p> <p>CF Step 500.000 kHz Auto Man</p> <p>Freq Offset 0 Hz</p>
CH78	<p>Agilent Spectrum Analyzer - Sweep SA          Center Freq 2.48000000 GHz          #Avg Type: RMS          Avg/Hold: 500/500          Ref Offset 0.5 dB          Ref 20.00 dBm          Mkr1 2.479 860 GHz          7.501 dBm          Center 2.480000 GHz          #Res BW 1.0 MHz          #VBW 3.0 MHz          Span 5.000 MHz          Sweep 1.000 ms (1001 pts)</p>	<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.48000000 GHz</p> <p>Start Freq 2.477500000 GHz</p> <p>Stop Freq 2.482500000 GHz</p> <p>CF Step 500.000 kHz Auto Man</p> <p>Freq Offset 0 Hz</p>

Modulation Type:		$\pi/4$ DQPSK
CH00		<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.40200000 GHz</p> <p>Start Freq 2.399500000 GHz</p> <p>Stop Freq 2.404500000 GHz</p> <p>CF Step 500.000 kHz</p> <p>Freq Offset 0 Hz</p>
CH39		<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.44100000 GHz</p> <p>Start Freq 2.438500000 GHz</p> <p>Stop Freq 2.443500000 GHz</p> <p>CF Step 500.000 kHz</p> <p>Freq Offset 0 Hz</p>
CH78		<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.48000000 GHz</p> <p>Start Freq 2.477500000 GHz</p> <p>Stop Freq 2.482500000 GHz</p> <p>CF Step 500.000 kHz</p> <p>Freq Offset 0 Hz</p>

Modulation Type:		8DPSK	
<p>CH00</p>			<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.40200000 GHz</p> <p>Start Freq 2.399500000 GHz</p> <p>Stop Freq 2.404500000 GHz</p> <p>CF Step 500.000 kHz</p> <p>Freq Offset 0 Hz</p>
<p>CH39</p>			<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.44100000 GHz</p> <p>Start Freq 2.438500000 GHz</p> <p>Stop Freq 2.443500000 GHz</p> <p>CF Step 500.000 kHz</p> <p>Freq Offset 0 Hz</p>
<p>CH78</p>			<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.48000000 GHz</p> <p>Start Freq 2.477500000 GHz</p> <p>Stop Freq 2.482500000 GHz</p> <p>CF Step 500.000 kHz</p> <p>Freq Offset 0 Hz</p>




### 5.4. 20 dB Bandwidth

**LIMIT**

N/A

**TEST CONFIGURATION**

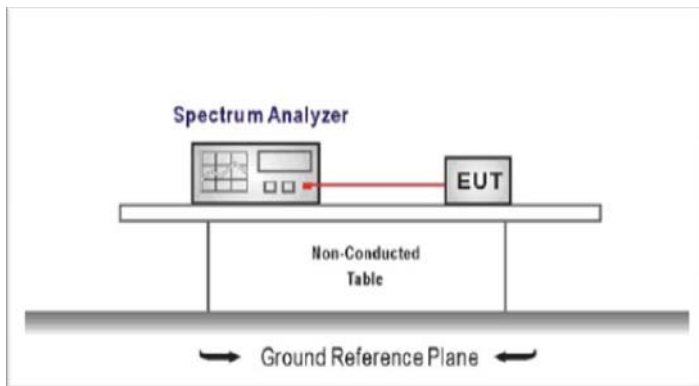

**TEST PROCEDURE**

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:  
 Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel  
 RBW ≥ 1% of the 20 dB bandwidth, VBW ≥ RBW  
 Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.

**TEST MODE:**

Please refer to the clause 3.3

**TEST RESULTS**

Passed       Not Applicable

Modulation type	Channel	20 dB Bandwidth (MHz)	Limit (MHz)	Result
GFSK	00	1.38	-	Pass
	39	1.24		
	78	1.31		
π/4DQPSK	00	1.23	-	Pass
	39	1.37		
	78	1.24		
8DPSK	00	1.26	-	Pass
	39	1.26		
	78	1.31		

Modulation Type:		GFSK
CH00	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.40200000 GHz</p> <p>Mkr1 2.4020725 GHz -0.51935 dBm</p> <p>Occupied Bandwidth 1.1535 MHz</p> <p>Total Power 11.6 dBm</p> <p>Transmit Freq Error -117.76 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.381 MHz</p> <p>x dB -20.00 dB</p>	<p>Frequency</p> <p>Center Freq 2.40200000 GHz</p> <p>CF Step 250.000 kHz</p> <p>Freq Offset 0 Hz</p>
CH39	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.44100000 GHz</p> <p>Mkr1 2.4410725 GHz 0.91599 dBm</p> <p>Occupied Bandwidth 1.0008 MHz</p> <p>Total Power 13.0 dBm</p> <p>Transmit Freq Error -51.054 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.236 MHz</p> <p>x dB -20.00 dB</p>	<p>Frequency</p> <p>Center Freq 2.44100000 GHz</p> <p>CF Step 250.000 kHz</p> <p>Freq Offset 0 Hz</p>
CH78	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.48000000 GHz</p> <p>Mkr1 2.4800725 GHz 2.0458 dBm</p> <p>Occupied Bandwidth 1.0040 MHz</p> <p>Total Power 14.1 dBm</p> <p>Transmit Freq Error -23.701 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.306 MHz</p> <p>x dB -20.00 dB</p>	<p>Frequency</p> <p>Center Freq 2.48000000 GHz</p> <p>CF Step 250.000 kHz</p> <p>Freq Offset 0 Hz</p>

Modulation Type:		$\pi/4$ DQPSK
CH00	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.40200000 GHz</p> <p>Center Freq: 2.402000000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 500/500</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 0.5 dB</p> <p>Ref: 20.00 dBm</p> <p>Mkr1 2.4020225 GHz</p> <p>2.4731 dBm</p> <p>Center 2.402 GHz</p> <p>#Res BW 30 kHz</p> <p>#VBW 100 kHz</p> <p>Span 2.5 MHz</p> <p>Sweep 2.667 ms</p> <p>Occupied Bandwidth 1.1693 MHz</p> <p>Total Power 10.5 dBm</p> <p>Transmit Freq Error 8.682 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.229 MHz</p> <p>x dB -20.00 dB</p>	<p>Frequency</p> <p>Center Freq 2.40200000 GHz</p> <p>CF Step 250.000 kHz</p> <p>Freq Offset 0 Hz</p>
CH39	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.441000000 GHz</p> <p>Center Freq: 2.441000000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 500/500</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 0.5 dB</p> <p>Ref: 20.00 dBm</p> <p>Mkr1 2.441015 GHz</p> <p>4.4326 dBm</p> <p>Center 2.441 GHz</p> <p>#Res BW 30 kHz</p> <p>#VBW 100 kHz</p> <p>Span 2.5 MHz</p> <p>Sweep 2.667 ms</p> <p>Occupied Bandwidth 1.2300 MHz</p> <p>Total Power 12.4 dBm</p> <p>Transmit Freq Error -13.813 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.371 MHz</p> <p>x dB -20.00 dB</p>	<p>Frequency</p> <p>Center Freq 2.441000000 GHz</p> <p>CF Step 250.000 kHz</p> <p>Freq Offset 0 Hz</p>
CH78	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.480000000 GHz</p> <p>Center Freq: 2.480000000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 500/500</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 0.5 dB</p> <p>Ref: 20.00 dBm</p> <p>Mkr1 2.480015 GHz</p> <p>5.4611 dBm</p> <p>Center 2.48 GHz</p> <p>#Res BW 30 kHz</p> <p>#VBW 100 kHz</p> <p>Span 2.5 MHz</p> <p>Sweep 2.667 ms</p> <p>Occupied Bandwidth 1.1899 MHz</p> <p>Total Power 13.5 dBm</p> <p>Transmit Freq Error 12.878 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.235 MHz</p> <p>x dB -20.00 dB</p>	<p>Frequency</p> <p>Center Freq 2.480000000 GHz</p> <p>CF Step 250.000 kHz</p> <p>Freq Offset 0 Hz</p>


Modulation Type:		8DPSK
CH00	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.40200000 GHz</p> <p>Ref Offset 0.5 dB Ref 20.00 dBm</p> <p>Mkr1 2.40202 GHz 2.4216 dBm</p> <p>Center 2.402 GHz</p> <p>Occupied Bandwidth 1.1781 MHz</p> <p>Total Power 10.8 dBm</p> <p>Transmit Freq Error 6.506 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.261 MHz</p> <p>x dB -20.00 dB</p>	<p>Frequency</p> <p>Center Freq 2.40200000 GHz</p> <p>CF Step 250.000 kHz</p> <p>Freq Offset 0 Hz</p>
CH39	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.44100000 GHz</p> <p>Ref Offset 0.5 dB Ref 20.00 dBm</p> <p>Mkr1 2.4410225 GHz 4.5660 dBm</p> <p>Center 2.441 GHz</p> <p>Occupied Bandwidth 1.1846 MHz</p> <p>Total Power 13.1 dBm</p> <p>Transmit Freq Error 4.938 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.263 MHz</p> <p>x dB -20.00 dB</p>	<p>Frequency</p> <p>Center Freq 2.44100000 GHz</p> <p>CF Step 250.000 kHz</p> <p>Freq Offset 0 Hz</p>
CH78	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.48000000 GHz</p> <p>Ref Offset 0.5 dB Ref 20.00 dBm</p> <p>Mkr1 2.480015 GHz 5.3395 dBm</p> <p>Center 2.48 GHz</p> <p>Occupied Bandwidth 1.2155 MHz</p> <p>Total Power 13.9 dBm</p> <p>Transmit Freq Error 1.687 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.313 MHz</p> <p>x dB -20.00 dB</p>	<p>Frequency</p> <p>Center Freq 2.48000000 GHz</p> <p>CF Step 250.000 kHz</p> <p>Freq Offset 0 Hz</p>

## 5.5. Carrier Frequencies Separation

### LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1): Frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25 kHz or the  $2/3 \times 20$  dB bandwidth of the hopping channel, whichever is greater.

### TEST CONFIGURATION

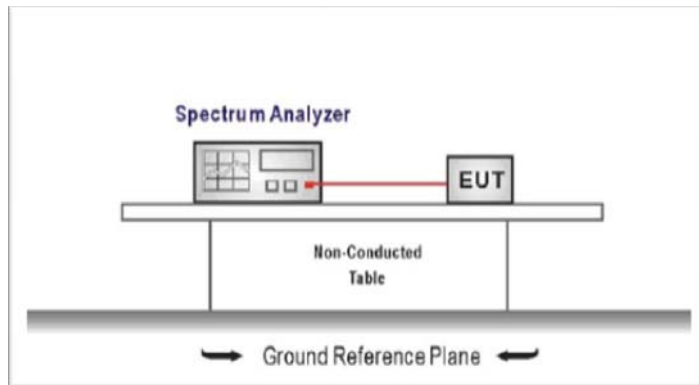

### TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:  
Span = wide enough to capture the peaks of two adjacent channels  
RBW  $\geq$  1% of the span, VBW  $\geq$  RBW  
Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.

### TEST MODE:

Please refer to the clause 3.3

### TEST RESULTS

Passed       Not Applicable




Modulation type	Channel	Carrier Frequencies Separation (MHz)	Limit (MHz) *	Result
GFSK	39	0.99	$\geq 0.92$	Pass
$\pi/4$ DQPSK	39	1.00	$\geq 0.92$	Pass
8DPSK	39	1.00	$\geq 0.88$	Pass

Note:

\*: GFSK limit =  $2/3 \times$  The maximum 20 dB Bandwidth for GFSK modulation on the section 5.4.

$\pi/4$ DQPSK limit =  $2/3 \times$  The maximum 20 dB Bandwidth for  $\pi/4$ DQPSK modulation on the section 5.4.

8DPSK limit =  $2/3 \times$  The maximum 20 dB Bandwidth for 8DPSK modulation on the section 5.4


<p>GFSK</p>		
<p><math>\pi/4</math>DQPSK</p>		
<p>8DPSK</p>		

### 5.6. Hopping Channel Number

#### LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1):Frequency hopping systems in the 2400–2483.5 MHz band shall use at least **15** channels.

#### TEST CONFIGURATION

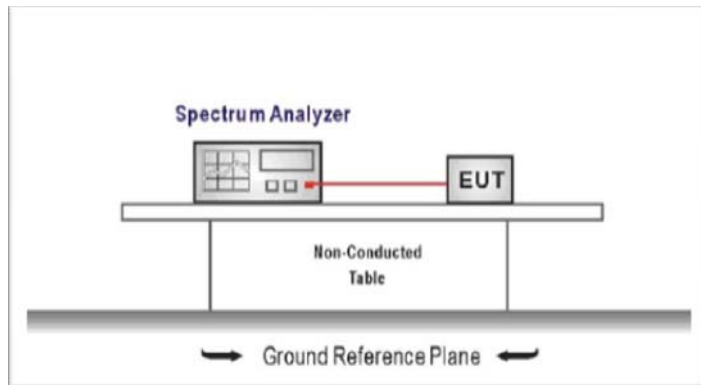

#### TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:  
 Span = the frequency band of operation  
 RBW  $\geq$  1% of the span, VBW  $\geq$  RBW  
 Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.




#### TEST MODE:

Please refer to the clause 3.3

#### TEST RESULTS

Passed       Not Applicable

Modulation type	Channel number	Limit	Result
GFSK	79	$\geq 15.00$	Pass
$\pi/4$ DQPSK	79		
8DPSK	79		
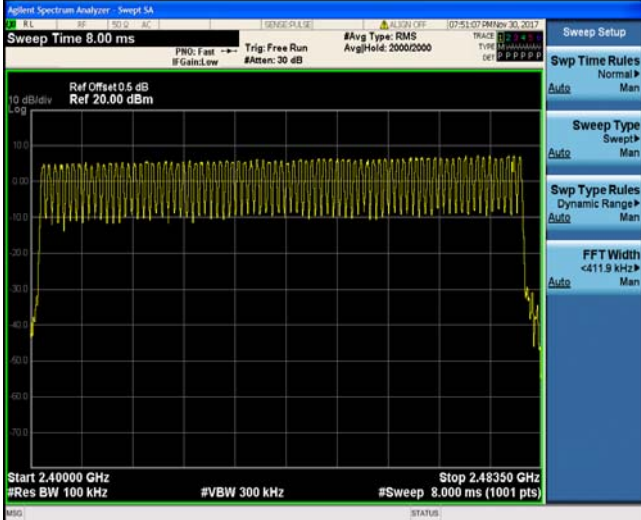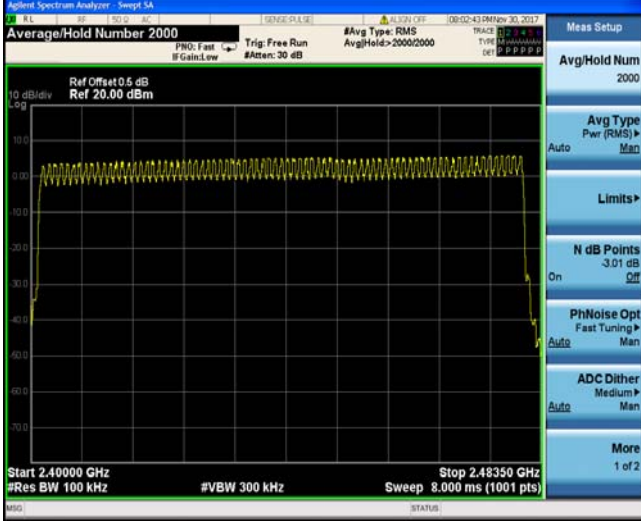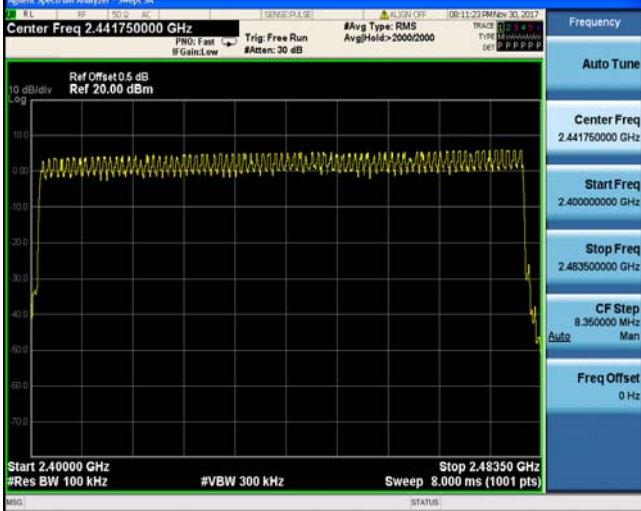
<p>GFSK</p>		
<p><math>\pi/4</math>DQPSK</p>		
<p>8DPSK</p>		




## 5.7. Dwell Time

### LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1):The average time of occupancy on any channel shall not be greater than 0.4 seconds within a pe-riod of 0.4 seconds multiplied by the number of hopping channels employed.

### TEST CONFIGURATION

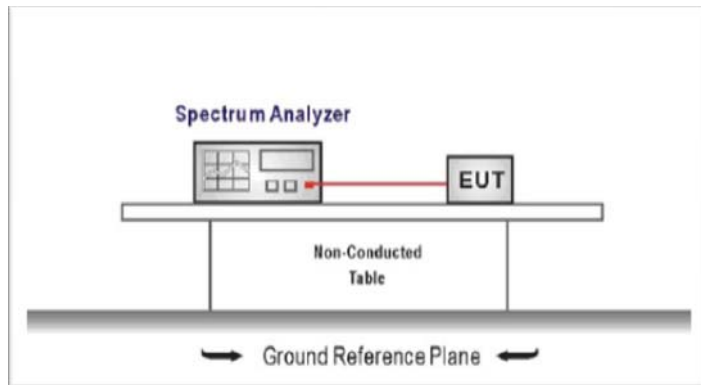

### TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:  
Span = zero span, centered on a hopping channel, RBW= 1 MHz, VBW ≥ RBW  
Sweep = as necessary to capture the entire dwell time per hopping channel,  
Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.

### TEST MODE:

Please refer to the clause 3.3







### TEST RESULTS

Passed       Not Applicable



Modulation type	Channel	Burst Width [ms/hop/ch]	Total Hops[hop*ch]	Dwell time (Second)	Limit (Second)	Result
GFSK	DH1	0.38	319.00	0.12	≤ 0.40	Pass
	DH3	1.65	160.00	0.26		
	DH5	2.89	107.00	0.31		
π/4DQPSK	2DH1	0.40	319.00	0.13	≤ 0.40	Pass
	2DH3	1.66	160.00	0.27		
	2DH5	2.90	107.00	0.31		
8DPSK	3DH1	0.39	319.00	0.12	≤ 0.40	Pass
	3DH3	1.65	168.00	0.28		
	3DH5	2.90	107.00	0.31		




Note:




1. We have tested all mode at high,middle and low channel,and recoreded worst case at middle channel.
2. Dwell time= Burst Width [ms/hop/ch]\* Total Hops[hop\*ch]

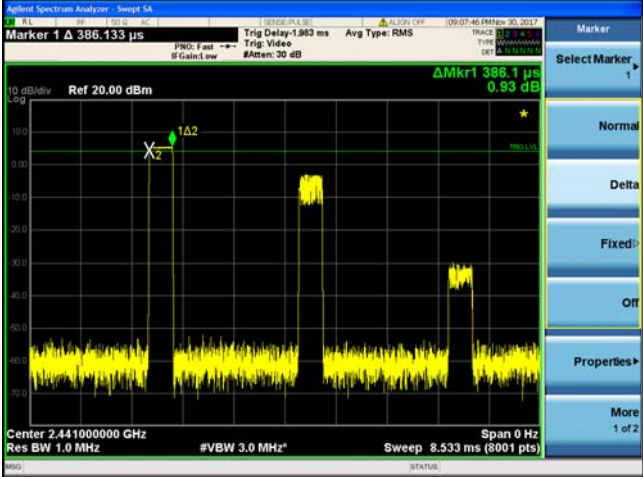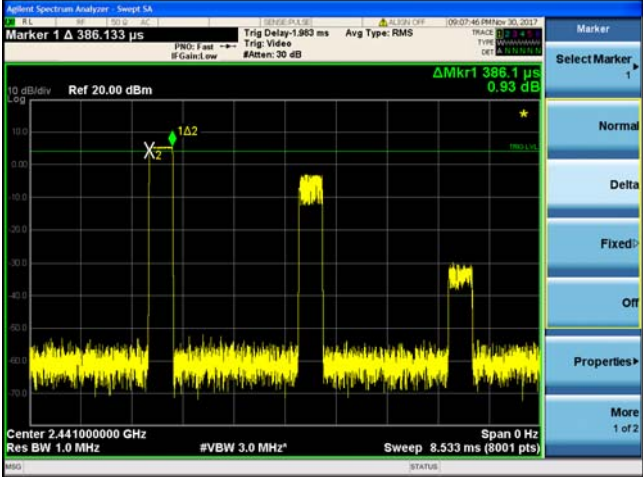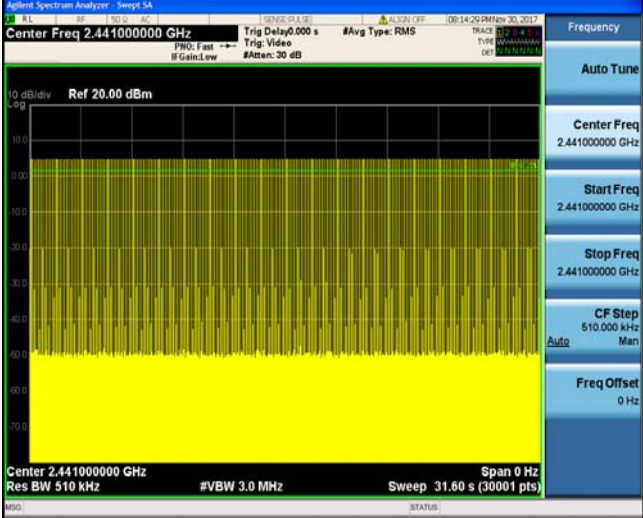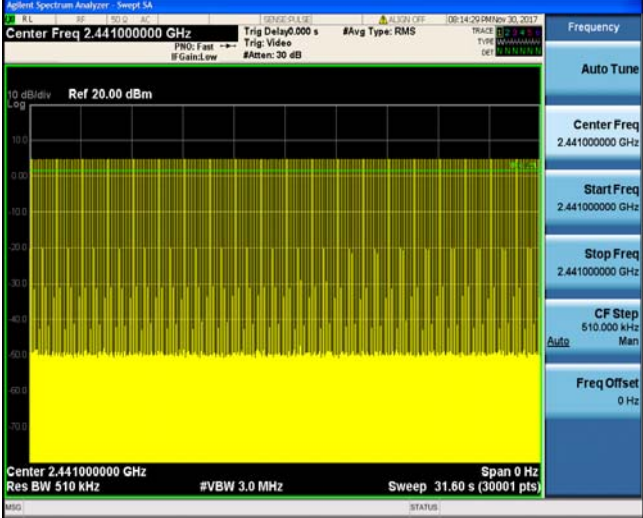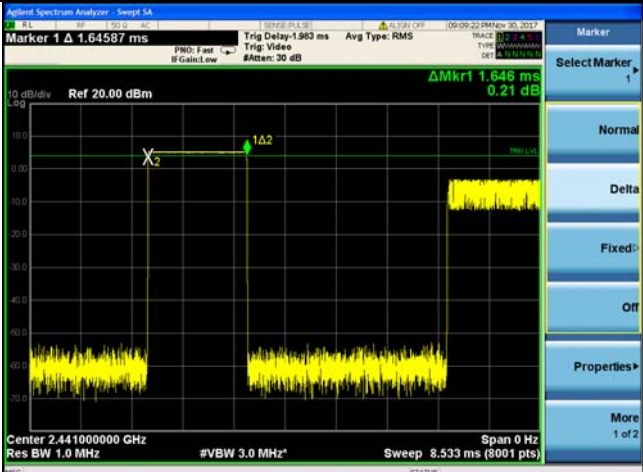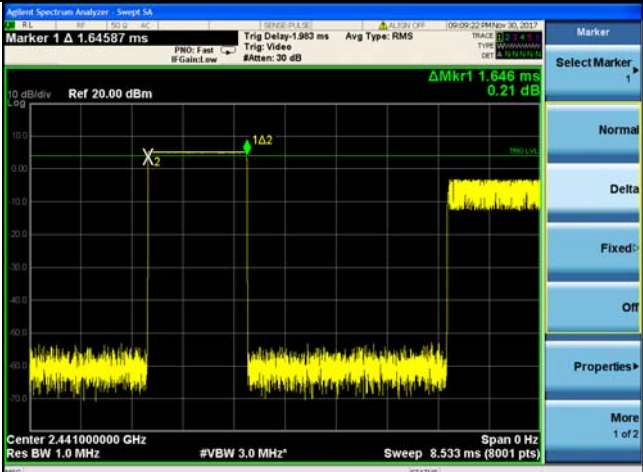Modulation Type:		GFSK
DH1		
		
DH3		

DH5	

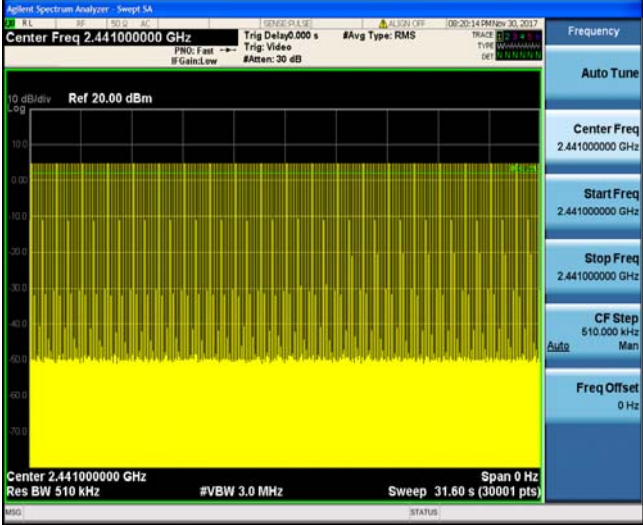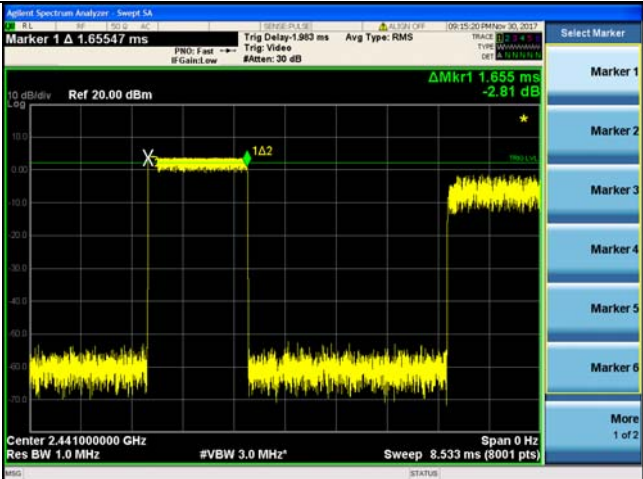Modulation Type:		$\pi/4$ DQPSK
2DH1		
		
		

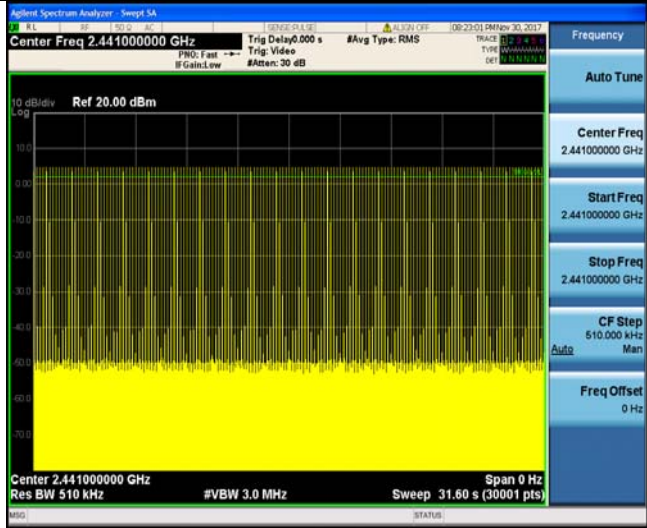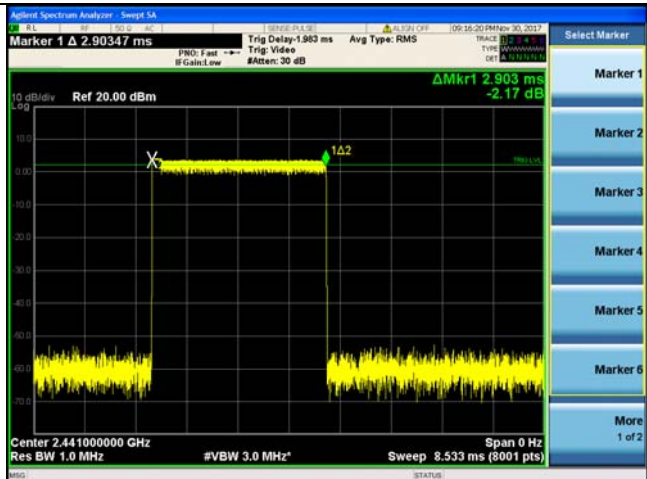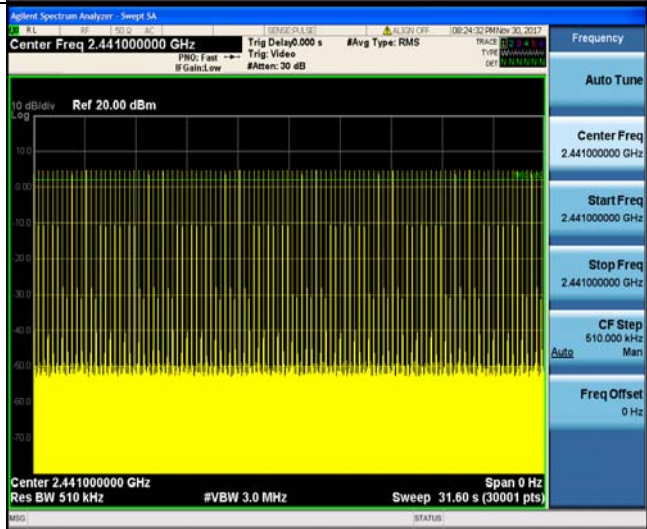	
	
2DH5	

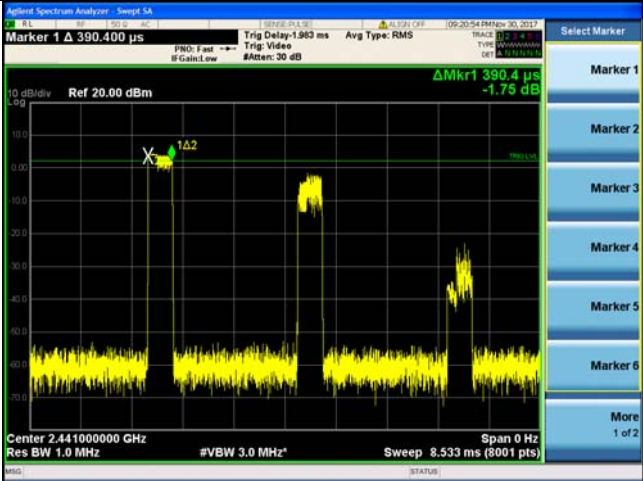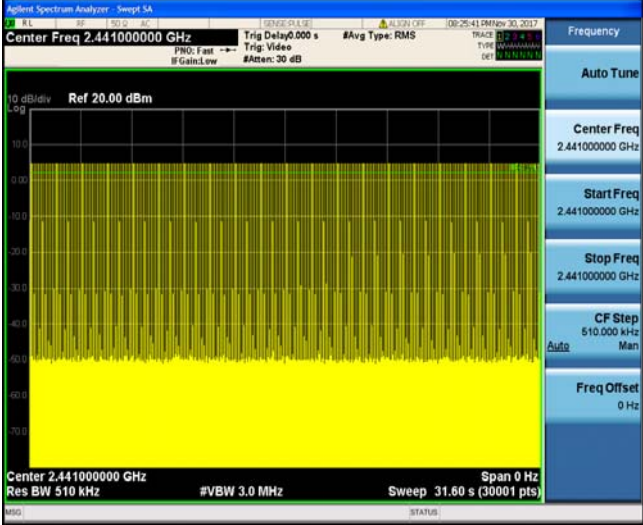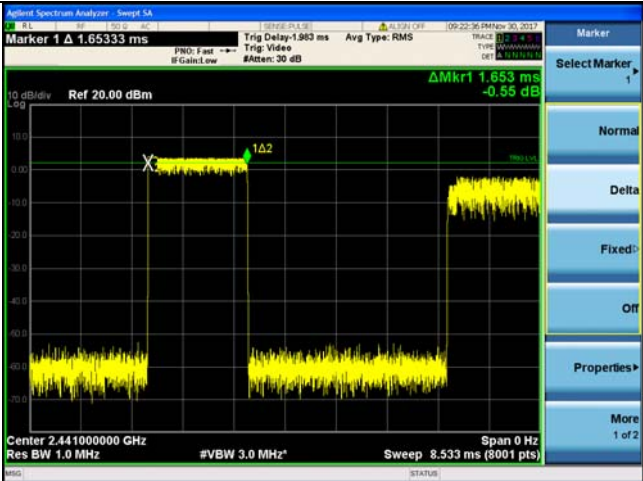Modulation Type:		8DPSK
3DH1		
		
		

3DH5	

### 5.8. Pseudorandom Frequency Hopping Sequence


#### LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1):Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo-randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

#### TEST RESULTS


The pseudorandom frequency hopping sequence may be generated in a nine-stage shift register whose 5<sup>th</sup> and 9<sup>th</sup> stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first one of 9 consecutive ones, for example: the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence:  $2^9 - 1 = 511$  bits
- Longest sequence of zeros: 8 (non-inverted signal)

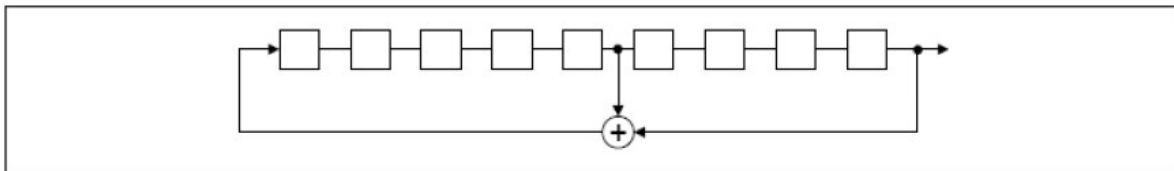

*Linear Feedback Shift Register for Generation of the PRBS sequence*

An example of pseudorandom frequency hopping sequence as follows:

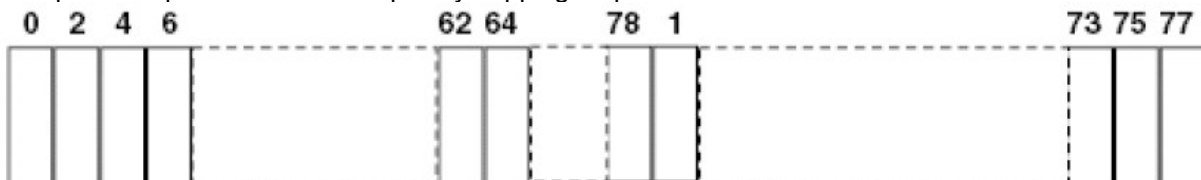

Each frequency used equally on the average by each transmitter. The system receiver has input bandwidths that match the hopping channel bandwidths of their corresponding transmitter and shift frequencies in synchronization with the transmitted signals.




**5.9. Restricted band (radiated)**

**LIMIT**

**FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, Radiated Emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the Radiated Emissions limits specified in §15.209(a) (see §15.205(c)).

**TEST CONFIGURATION**

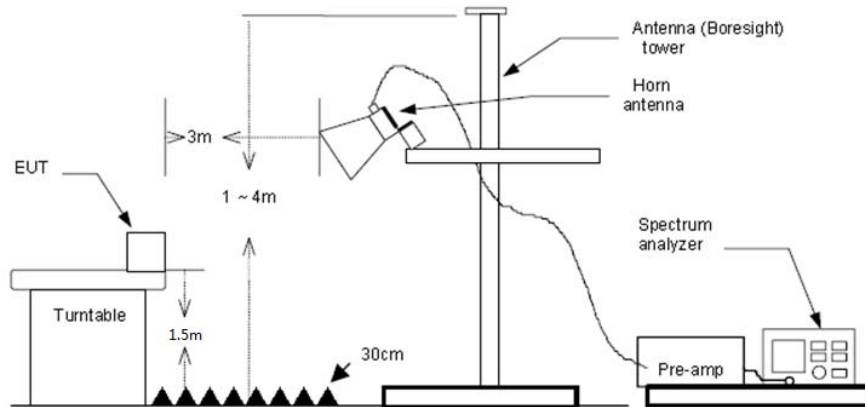

**TEST PROCEDURE**

1. The EUT was setup and tested according to ANSI C63.10:2013 for compliance to FCC 47CFR 15.247 requirements.
2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.
5. The receiver set as follow:  
 RBW=1 MHz, VBW=3 MHz Peak detector for Peak value  
 RBW=1 MHz, VBW=10 Hz Peak detector for Average value.

**TEST MODE:**

Please refer to the clause 3.3

**TEST RESULTS**

**Passed**       **Not Applicable**

**Note:**

- 1) Final level= Read level + Antenna Factor+ Cable Loss- Preamp Factor
- 2) Have pre-scan all modulation mode, found the GFSK modulation which it was worst case, so only the worst case's data on the test report.
- 3) The peak level is lower than average limit(54 dBuV/m), this data is the too weak instrument of signal is unable to test.

CH00									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Polarization	Test value
2310.00	34.10	28.05	6.62	37.65	31.12	74.00	-42.88	Vertical	Peak
2390.03	35.81	27.65	6.75	37.87	32.34	74.00	-41.66	Vertical	
2310.00	32.36	28.05	6.62	37.65	29.38	74.00	-44.62	Horizontal	
2390.03	32.21	27.65	6.75	37.87	28.74	74.00	-45.26	Horizontal	


CH78									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Polarization	Test value
2483.50	41.99	27.26	6.83	37.87	38.21	74.00	-35.79	Vertical	Peak
2493.30	51.98	27.23	6.84	37.87	48.18	74.00	-25.82	Vertical	
2500.00	33.74	27.20	6.84	37.87	29.91	74.00	-44.09	Vertical	
2483.50	46.33	27.26	6.83	37.87	42.55	74.00	-31.45	Horizontal	
2491.95	47.24	27.23	6.83	37.87	43.43	74.00	-30.57	Horizontal	
2500.00	33.10	27.20	6.84	37.87	29.27	74.00	-44.73	Horizontal	

## 5.10. Band edge and Spurious Emissions (conducted)

### LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### TEST CONFIGURATION

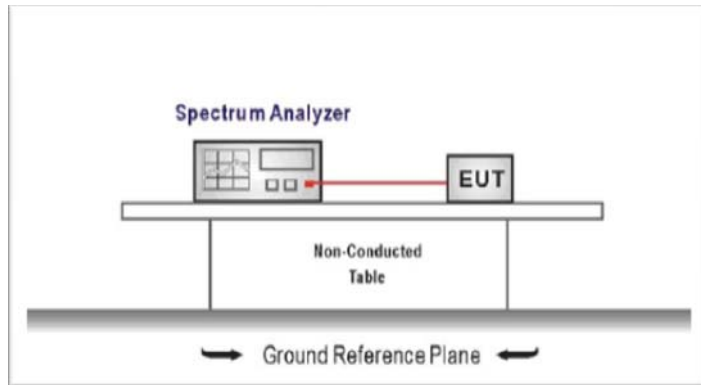

### TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:  
RBW = 100 kHz, VBW  $\geq$  RBW  
Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.

### TEST MODE:

Please refer to the clause 3.3


### TEST RESULTS

Passed       Not Applicable

Test Item:	Band edge	Modulation type:	GFSK
<p>CH00</p> <p>No hopping mode</p>			<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.357500000 GHz</p> <p>Start Freq 2.310000000 GHz</p> <p>Stop Freq 2.405000000 GHz</p> <p>CF Step 9.500000 MHz</p> <p>Freq Offset 0 Hz</p>
<p>CH00</p> <p>Hopping mode</p>			<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.357500000 GHz</p> <p>Start Freq 2.310000000 GHz</p> <p>Stop Freq 2.405000000 GHz</p> <p>CF Step 9.500000 MHz</p> <p>Freq Offset 0 Hz</p>
<p>CH78</p> <p>No hopping mode</p>			<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.489000000 GHz</p> <p>Start Freq 2.478000000 GHz</p> <p>Stop Freq 2.500000000 GHz</p> <p>CF Step 2.200000 MHz</p> <p>Freq Offset 0 Hz</p>



CH78  
Hopping mode

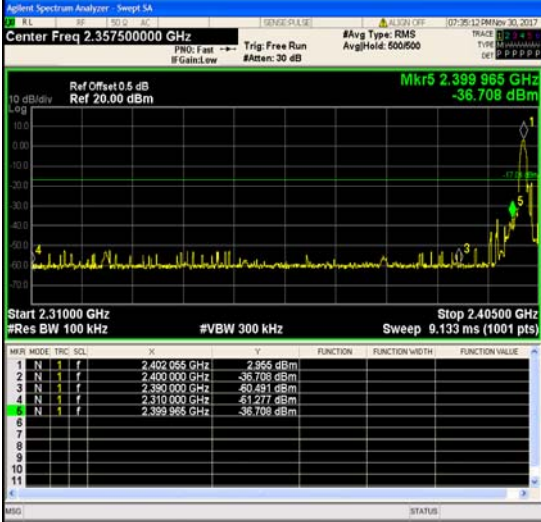

Test Item:	Band edge	Modulation type:	$\pi/4$ DQPSK
<p>CH00</p> <p>No hopping mode</p>			<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.357500000 GHz</p> <p>Start Freq 2.310000000 GHz</p> <p>Stop Freq 2.405000000 GHz</p> <p>CF Step 9.500000 MHz</p> <p>Freq Offset 0 Hz</p>
<p>CH00</p> <p>Hopping mode</p>			<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.357500000 GHz</p> <p>Start Freq 2.310000000 GHz</p> <p>Stop Freq 2.405000000 GHz</p> <p>CF Step 9.500000 MHz</p> <p>Freq Offset 0 Hz</p>
<p>CH78</p> <p>No hopping mode</p>			<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.489000000 GHz</p> <p>Start Freq 2.478000000 GHz</p> <p>Stop Freq 2.500000000 GHz</p> <p>CF Step 2.200000 MHz</p> <p>Freq Offset 0 Hz</p>

CH78  
Hopping mode


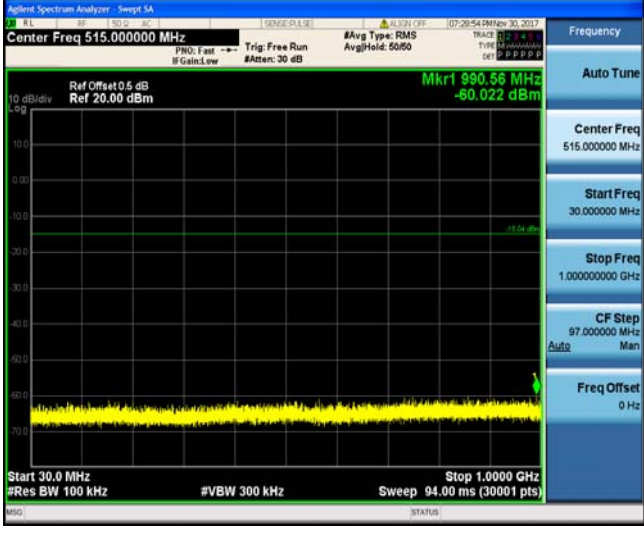
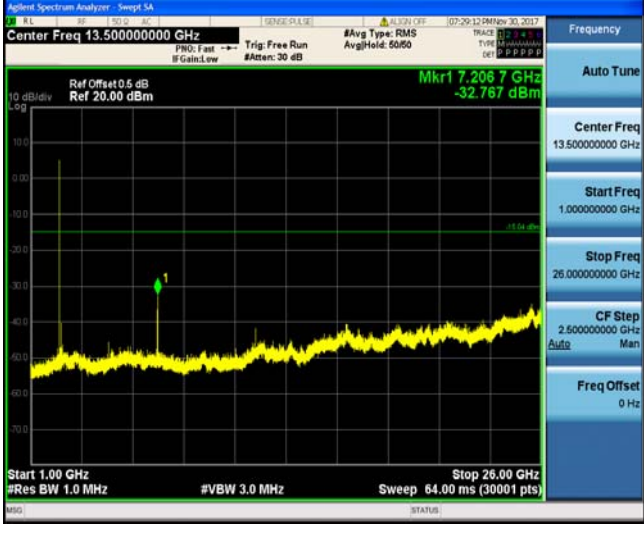


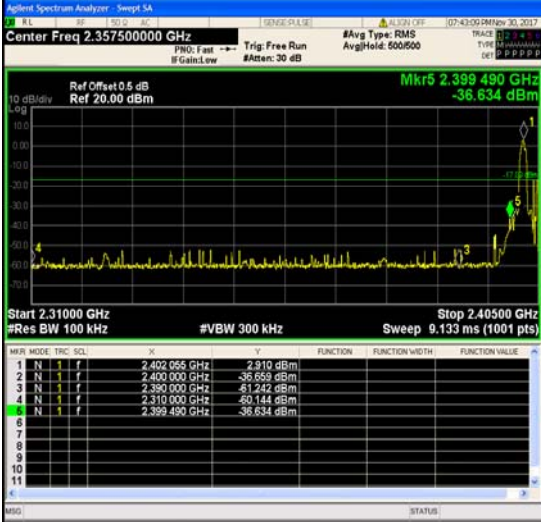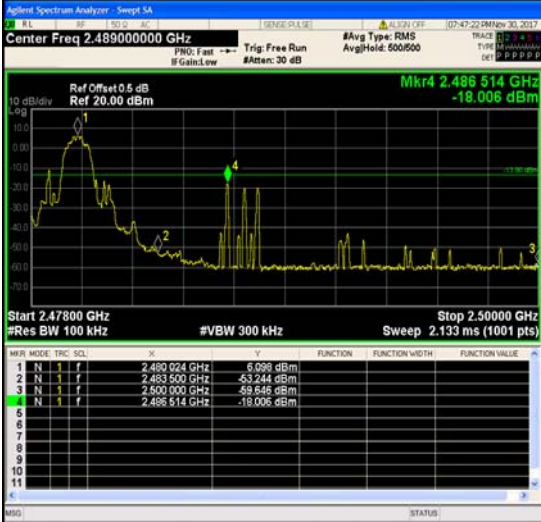Test Item:	Band edge	Modulation type:	8DPSK
<p>CH00</p> <p>No hopping mode</p>			<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.357500000 GHz</p> <p>Start Freq 2.310000000 GHz</p> <p>Stop Freq 2.405000000 GHz</p> <p>CF Step 9.500000 MHz</p> <p>Freq Offset 0 Hz</p>
<p>CH00</p> <p>Hopping mode</p>			<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.357500000 GHz</p> <p>Start Freq 2.310000000 GHz</p> <p>Stop Freq 2.405000000 GHz</p> <p>CF Step 9.500000 MHz</p> <p>Freq Offset 0 Hz</p>
<p>CH78</p> <p>No hopping mode</p>			<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.489000000 GHz</p> <p>Start Freq 2.478000000 GHz</p> <p>Stop Freq 2.500000000 GHz</p> <p>CF Step 2.200000 MHz</p> <p>Freq Offset 0 Hz</p>



CH78  
Hoppig mode





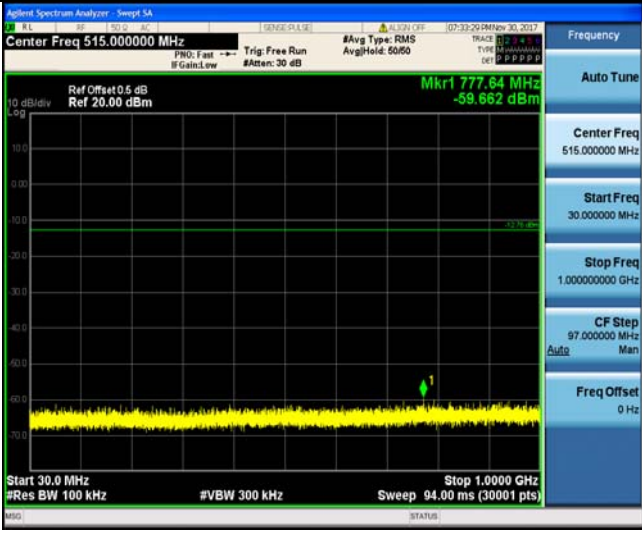
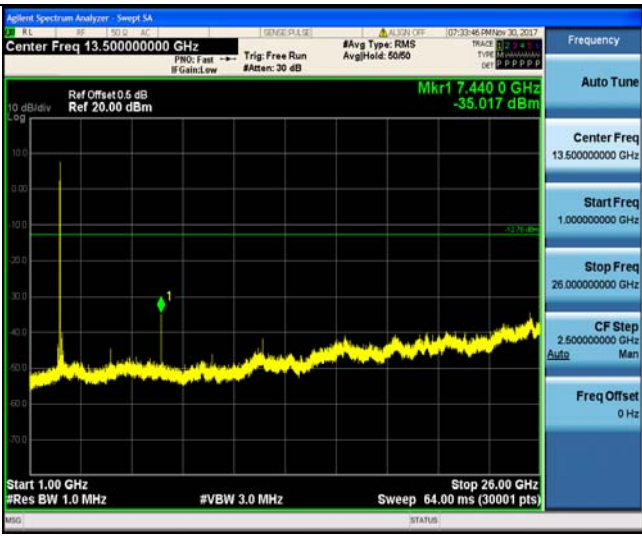
Test Item:	SE	Modulation type:	GFSK
reference level CH00			
CH00			
			


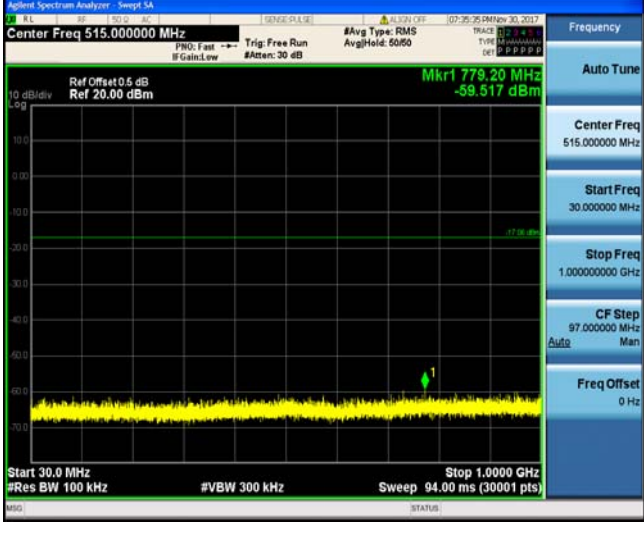

reference level CH39


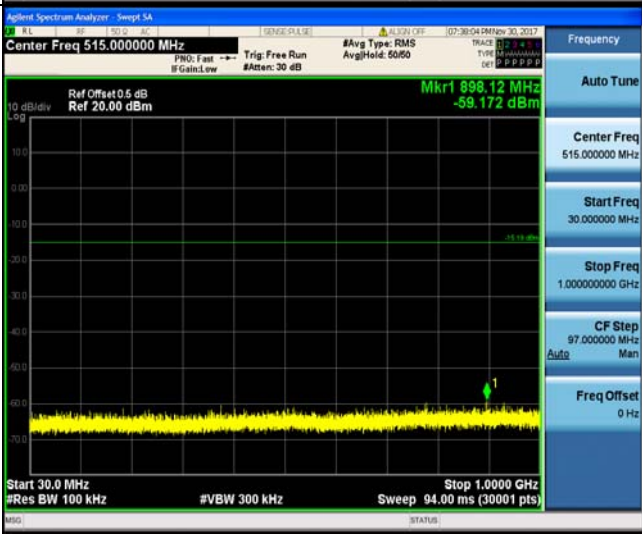
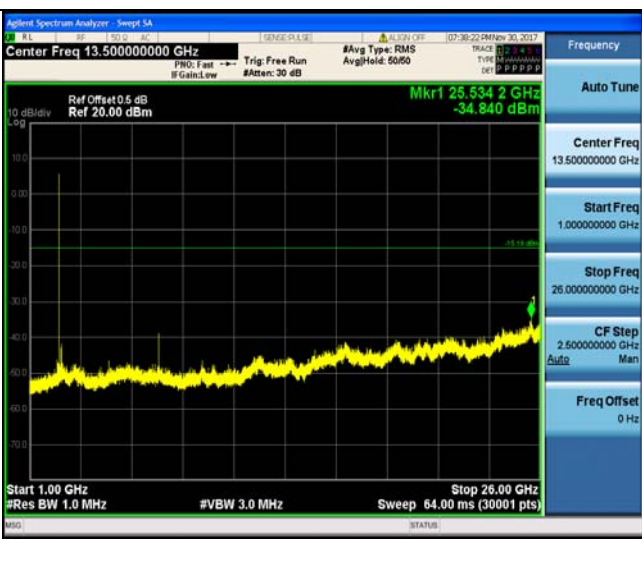



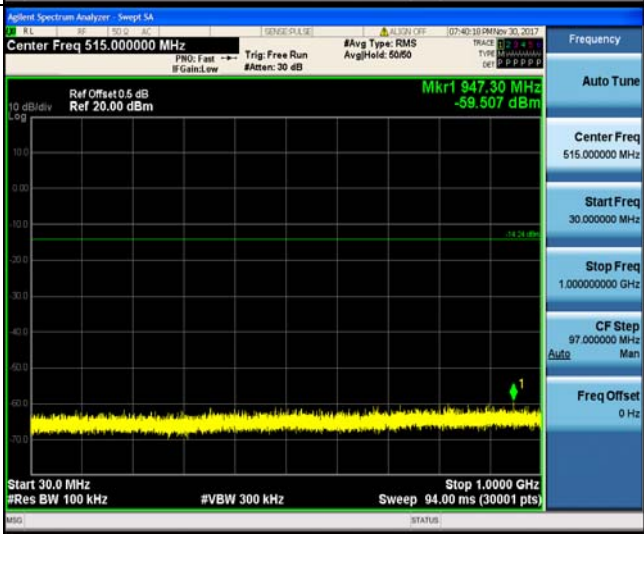
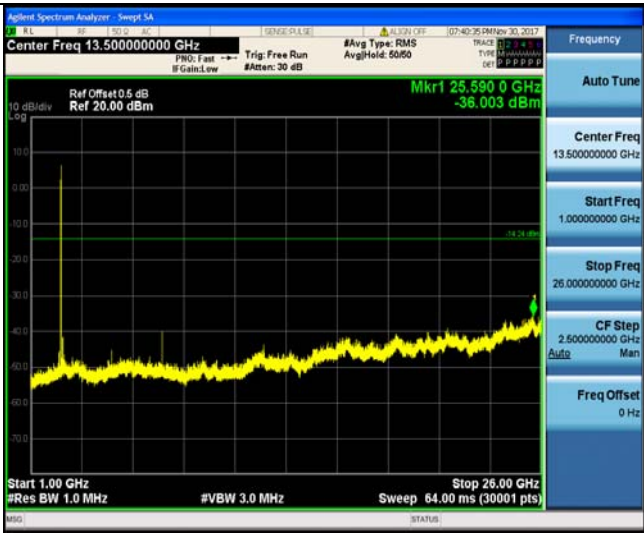
CH39

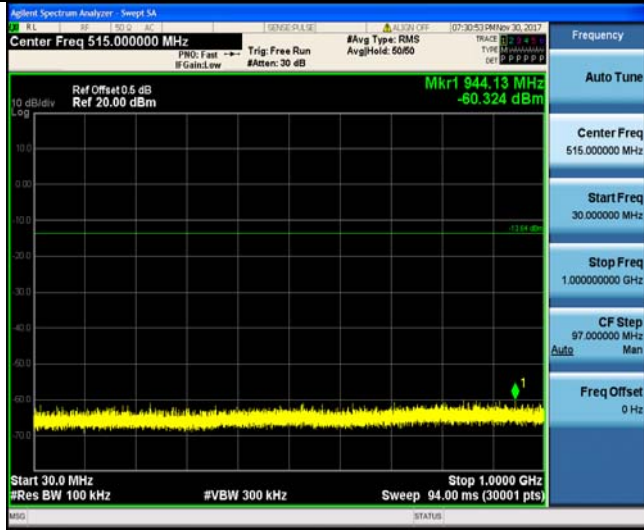




<p>reference level CH78</p>	
<p>CH78</p>	
	


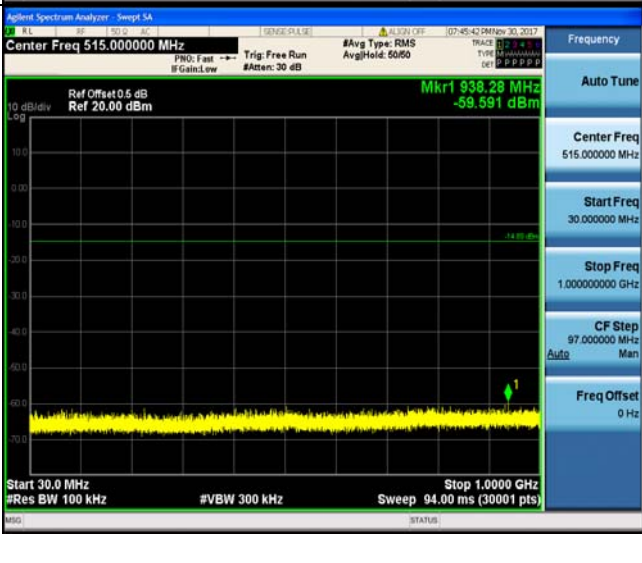
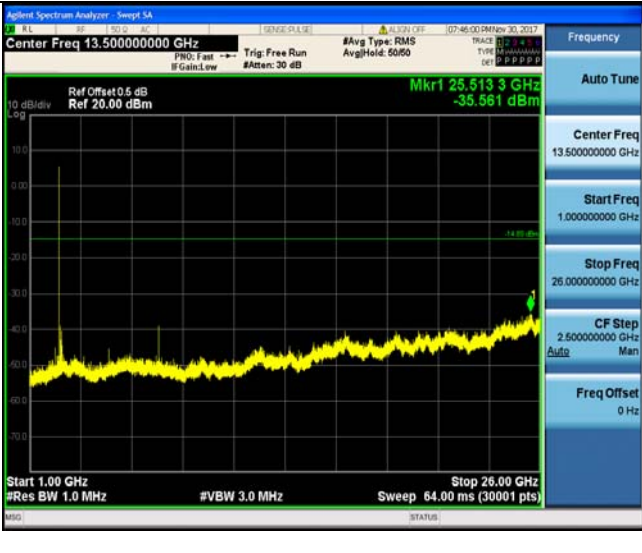
Test Item:	SE	Modulation type:	$\pi/4$ DQPSK
reference level CH00		 <p>Agilent Spectrum Analyzer - Sweep SA Center Freq 2.40200000 GHz #Avg Type: RMS Avg/Hold: 100/100 Trig: Free Run #Att: 30 dB</p> <p>Ref Offset: 0.5 dB Ref 20.50 dBm</p> <p>Mkr1 2.402 03 GHz -2.939 dBm</p> <p>Center 2.40200 GHz #Res BW 100 kHz #VBW 300 kHz Span 30.00 MHz Sweep 2.933 ms (1001 pts)</p>	
CH00		 <p>Agilent Spectrum Analyzer - Sweep SA Center Freq 515.000000 MHz #Avg Type: RMS Avg/Hold: 50/50 Trig: Free Run #Att: 30 dB</p> <p>Ref Offset: 0.5 dB Ref 20.00 dBm</p> <p>Mkr1 779.20 MHz -59.517 dBm</p> <p>Start 30.0 MHz #Res BW 100 kHz #VBW 300 kHz Stop 1.0000 GHz Sweep 94.00 ms (30001 pts)</p>	
		 <p>Agilent Spectrum Analyzer - Sweep SA Center Freq 13.50000000 GHz #Avg Type: RMS Avg/Hold: 50/50 Trig: Free Run #Att: 30 dB</p> <p>Ref Offset: 0.5 dB Ref 20.00 dBm</p> <p>Mkr1 25.530 0 GHz -35.294 dBm</p> <p>Start 1.00 GHz #Res BW 1.0 MHz #VBW 3.0 MHz Stop 26.00 GHz Sweep 64.00 ms (30001 pts)</p>	


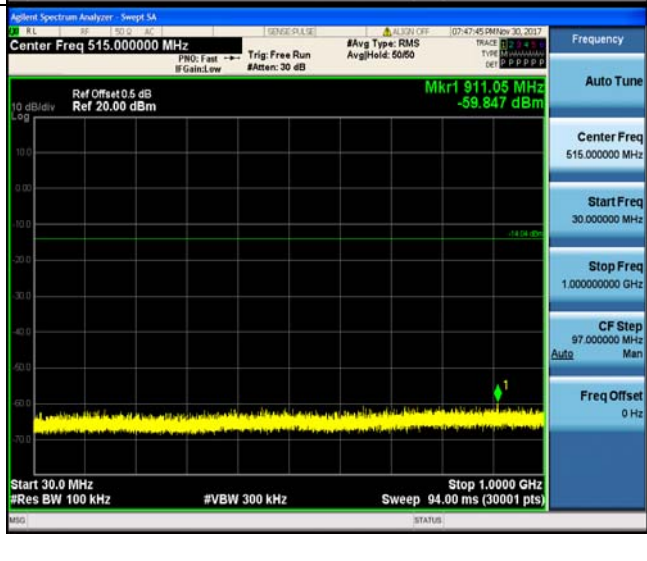
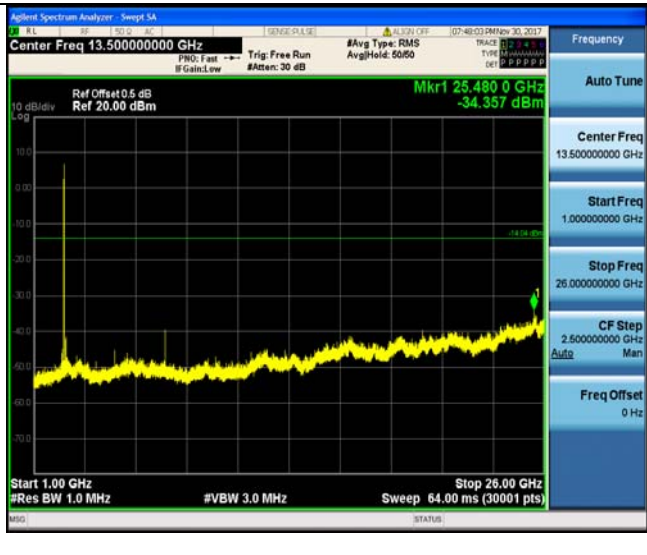
<p>reference level CH39</p>	
<p>CH39</p>	
	
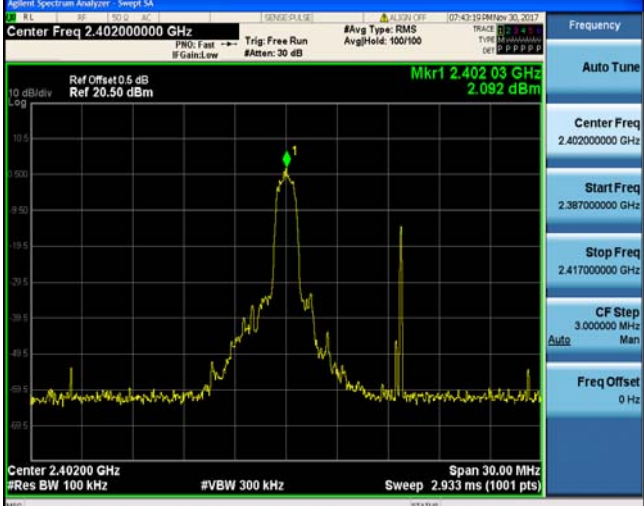
<p>reference level CH78</p>	
<p>CH78</p>	
	

Test Item:	SE	Modulation type:	8DPSK
reference level CH00		 <p>Agilent Spectrum Analyzer - Sweep SA            Center Freq 2.40200000 GHz            Ref Offset 0.5 dB            Ref 20.50 dBm            Mkr1 2.402 03 GHz            2.092 dBm            #Avg Type: RMS            Avg/Hold: 100/100            #Att: 30 dB            Span 30.00 MHz            #Res BW 100 kHz            #VBW 300 kHz            Sweep 2.933 ms (1001 pts)</p>	
CH00		 <p>Agilent Spectrum Analyzer - Sweep SA            Center Freq 515.000000 MHz            Ref Offset 0.5 dB            Ref 20.00 dBm            Mkr1 515.00 MHz            -60.100 dBm            #Avg Type: RMS            Avg/Hold: 50/50            #Att: 30 dB            Start 30.0 MHz            Stop 1.0000 GHz            #Res BW 100 kHz            #VBW 300 kHz            Sweep 94.00 ms (30001 pts)</p>	
		 <p>Agilent Spectrum Analyzer - Sweep SA            Center Freq 13.50000000 GHz            Ref Offset 0.5 dB            Ref 20.00 dBm            Mkr1 13.500 GHz            -34.439 dBm            #Avg Type: RMS            Avg/Hold: 50/50            #Att: 30 dB            Start 1.00 GHz            Stop 26.00 GHz            #Res BW 1.0 MHz            #VBW 3.0 MHz            Sweep 64.00 ms (30001 pts)</p>	



<p>reference level CH39</p>	
<p>CH39</p>	
	

<p>reference level CH78</p>	 <p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.48000000 GHz</p> <p>Mkr1 2.48018 GHz -5.962 dBm</p> <p>Center 2.48000 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.933 ms (1001 pts)</p>
<p>CH78</p>	 <p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 515.000000 MHz</p> <p>Mkr1 511.05 MHz -59.847 dBm</p> <p>Start 30.0 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 94.00 ms (30001 pts)</p>
	 <p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 13.50000000 GHz</p> <p>Mkr1 25.4800 GHz -34.357 dBm</p> <p>Start 1.00 GHz #Res BW 1.0 MHz #VBW 3.0 MHz Sweep 64.00 ms (30001 pts)</p>

### 5.11. Spurious Emissions (radiated)


#### LIMIT

#### FCC CFR Title 47 Part 15 Subpart C Section 15.209


Frequency	Limit (dBuV/m @3m)	Value
30 MHz ~ 88 MHz	40.00	Quasi-peak
88 MHz ~ 216 MHz	43.50	Quasi-peak
216 MHz ~ 960 MHz	46.00	Quasi-peak
960 MHz ~ 1 GHz	54.00	Quasi-peak
Above 1 GHz	54.00	Average
	74.00	Peak

#### TEST CONFIGURATION


- Below 30 MHz

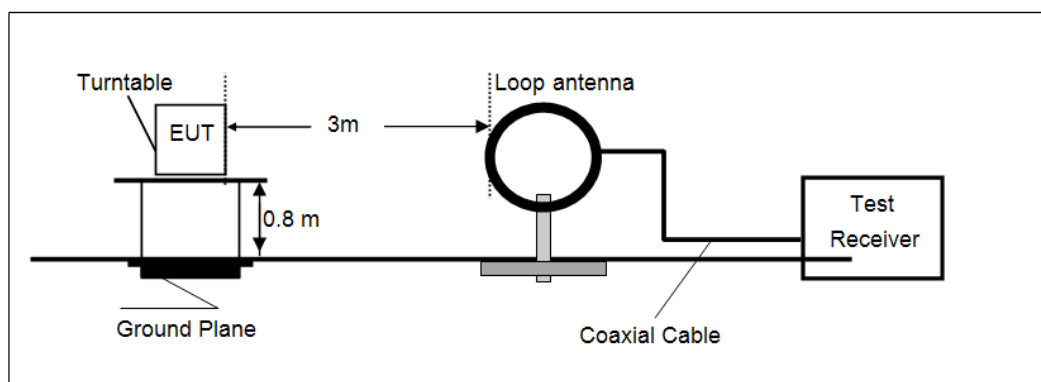

- 30 MHz ~1000 MHz

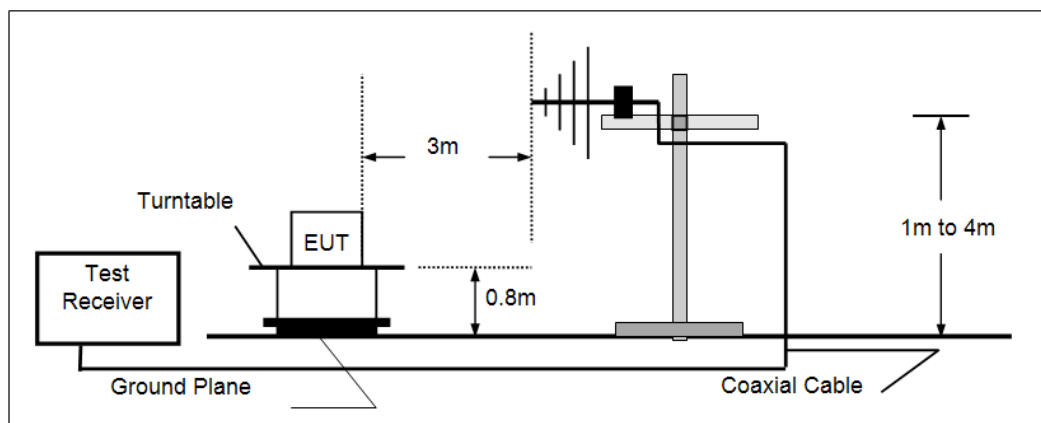

- Above 1 GHz

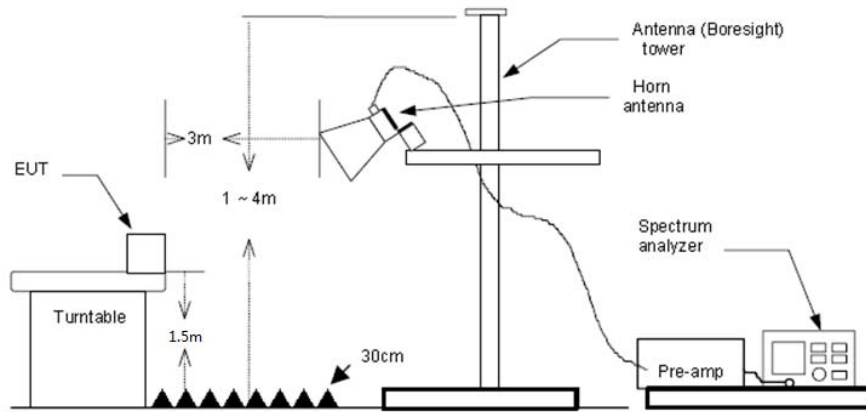

## TEST PROCEDURE

1. The EUT was tested according to ANSI C63.10:2013.
2. The EUT is placed on a turn table which is 0.8 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna.
5. Use the following spectrum analyzer settings
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Below 1 GHz, RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold; If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
  - (3) Above 1 GHz, RBW=1 MHz, VBW=3 MHz Peak detector for Peak value  
RBW=1 MHz, VBW=10 Hz Peak detector for Average value.

## TEST MODE:

Please refer to the clause 3.3

## TEST RESULTS

**Passed**       **Not Applicable**

Note:


- 1) Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- 2) The emission levels of other frequencies are very lower than the limit and not show in test report.
- 3) Below 1 GHz, Have pre-scan all modulation mode, found the GFSK modulation High channel which it was worst case, so only the worst case's data on the test report.
- 4) Above 1 GHz, Have pre-scan all modulation mode, found the GFSK modulation which it was worst case, so only the worst case's data on the test report
- 5) The peak level is lower than average limit (54 dBuV/m), this data is the too weak instrument of signal is unable to test.

### ➤ **9 kHz ~ 30 MHz**

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.


➤ 30MHz ~ 1GHz

Polarization: Vertical

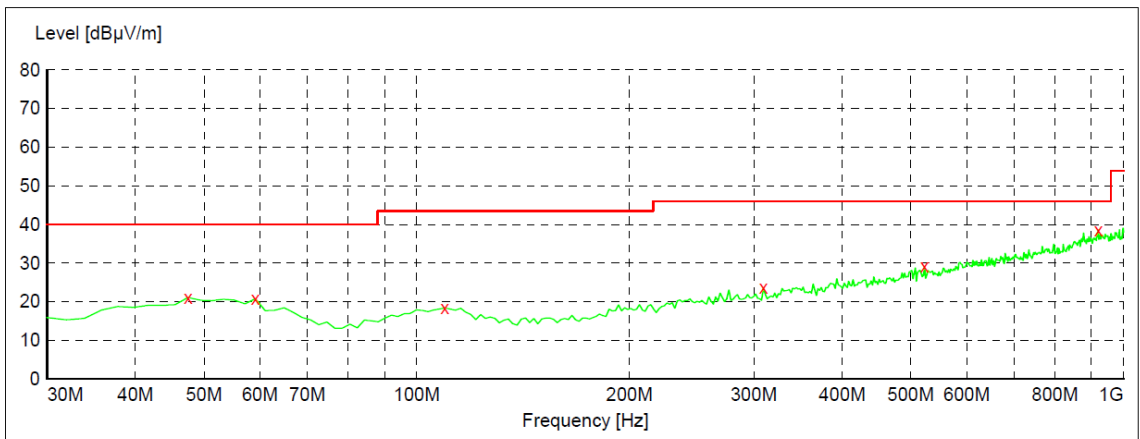


x x x MES GM1712046122\_red

Frequency MHz	Level dBuV/m	Transd dB	Limit dBuV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
47.460000	21.10	-8.8	40.0	18.9	QP	100.0	189.00	VERTICAL
59.100000	20.80	-9.8	40.0	19.2	QP	100.0	253.00	VERTICAL
109.540000	18.40	-10.8	43.5	25.1	QP	100.0	253.00	VERTICAL
309.360000	23.60	-7.1	46.0	22.4	QP	100.0	321.00	VERTICAL
522.760000	29.10	-1.3	46.0	16.9	QP	100.0	229.00	VERTICAL
920.460000	38.60	7.0	46.0	7.4	QP	100.0	241.00	VERTICAL

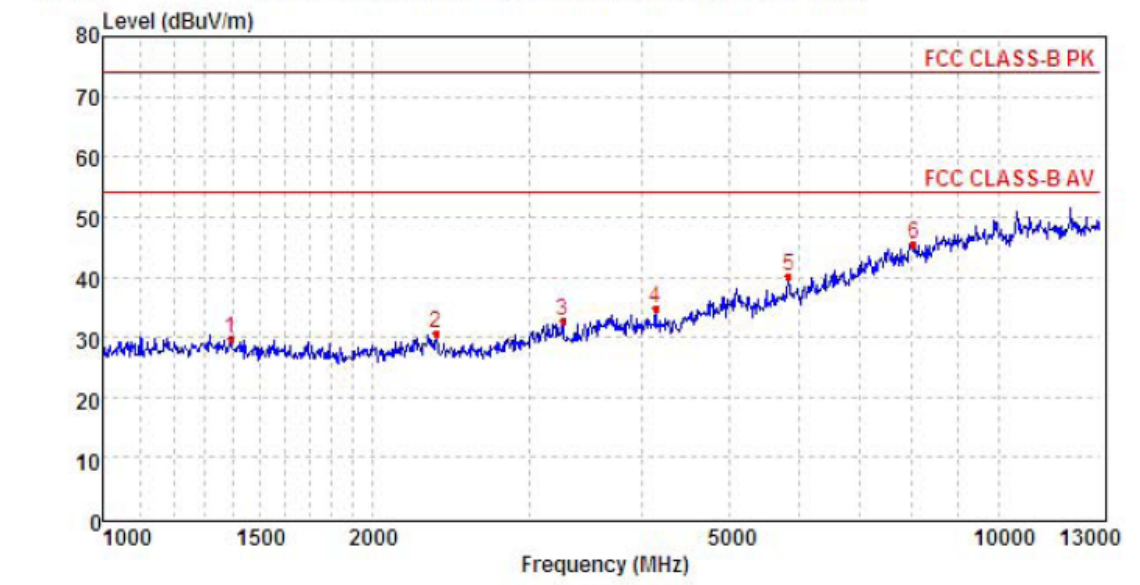


Mark	Frequency MHz	Reading dbuv/m	Antenna db	Cable db	Preamp db	Level dbuv/m	Limit dbuv/m	Over limit	Remark
1	1388.62	35.4	25.9	5.0	36.5	29.8	74.0	-44.2	Peak
2	2355.36	33.8	27.8	6.7	37.8	30.5	74.0	-43.5	Peak
3	3262.33	34.9	28.4	7.8	38.3	32.8	74.0	-41.2	Peak
4	4141.19	33.9	29.9	8.9	37.8	34.9	74.0	-39.1	Peak
5	5824.77	32.9	32.1	10.6	35.3	40.3	74.0	-33.7	Peak
6	8047.04	30.5	37.1	12.4	34.5	45.5	74.0	-28.5	Peak

Polarization: Horizontal

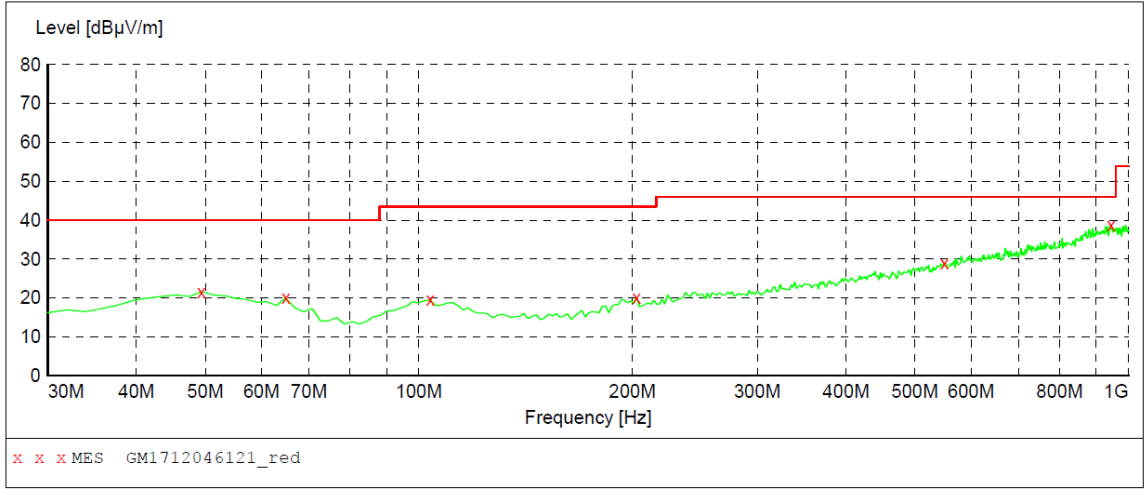

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
49.400000	21.60	-8.7	40.0	18.4	QP	300.0	359.00	HORIZONTAL
64.920000	20.00	-11.4	40.0	20.0	QP	100.0	7.00	HORIZONTAL
103.720000	19.50	-10.5	43.5	24.0	QP	100.0	304.00	HORIZONTAL
202.660000	20.20	-10.2	43.5	23.3	QP	300.0	204.00	HORIZONTAL
549.920000	29.00	-0.8	46.0	17.0	QP	100.0	34.00	HORIZONTAL
943.740000	38.80	7.2	46.0	7.2	QP	100.0	276.00	HORIZONTAL

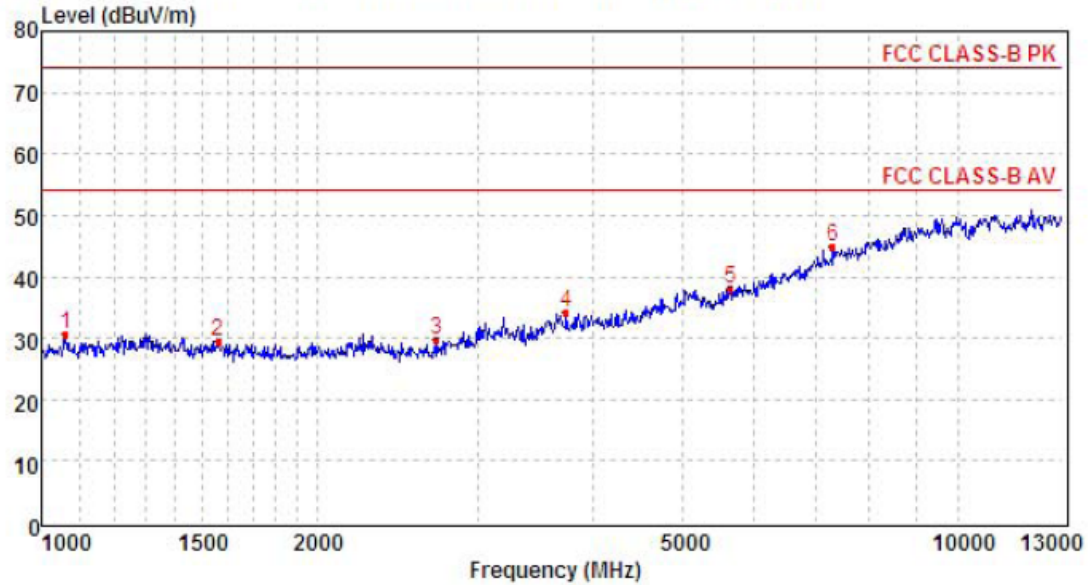

Mark	Frequency MHZ	Reading dbuv/m	Antenna db	Cable db	Preamp db	Level dbuv/m	Limit dbuv/m	Over limit	Remark
1	1063.49	37.3	25.4	4.4	36.6	30.5	74.0	-43.5	Peak
2	1558.52	35.4	25.3	5.5	36.7	29.5	74.0	-44.5	Peak
3	2698.34	32.6	28.1	7.1	38.1	29.7	74.0	-44.3	Peak
4	3737.38	34.6	29.4	8.4	38.2	34.2	74.0	-39.8	Peak
5	5648.22	31.6	31.7	10.3	35.7	37.9	74.0	-36.1	Peak
6	7299.72	31.5	36.3	12.0	35.0	44.8	74.0	-29.2	Peak

## ➤ Above 1 GHz

CH00 for GFSK									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Polarization	Test value
1195.05	50.27	26.26	4.65	36.57	44.61	74.00	-29.39	Vertical	Peak
4809.50	58.19	31.58	9.55	36.93	62.39	74.00	-11.61	Vertical	
7209.02	50.15	36.21	11.87	35.07	63.16	74.00	-10.84	Vertical	
12024.96	41.53	39.69	14.65	33.28	62.59	74.00	-11.41	Vertical	
4809.50	42.06	31.58	9.55	36.93	46.26	54.00	-7.74	Vertical	Average
7209.02	31.66	36.21	11.87	35.07	44.67	54.00	-9.33	Vertical	
12024.97	23.55	39.69	14.65	33.28	44.61	54.00	-9.39	Vertical	
1724.17	48.85	25.25	5.81	36.98	42.93	74.00	-31.07	Horizontal	Peak
4809.50	60.51	31.58	9.55	36.93	64.71	74.00	-9.29	Horizontal	
7209.02	46.18	36.21	11.87	35.07	59.19	74.00	-14.81	Horizontal	
12024.96	41.78	39.69	14.65	33.28	62.84	74.00	-11.16	Horizontal	
4809.50	43.45	31.58	9.55	36.93	47.65	54.00	-6.35	Horizontal	Average
7209.02	28.02	36.21	11.87	35.07	41.03	54.00	-12.97	Horizontal	
12024.97	23.72	39.69	14.65	33.28	44.78	54.00	-9.22	Horizontal	

CH39 for GFSK									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Polarization	Test value
1724.17	49.72	25.25	5.81	36.98	43.80	74.00	-30.20	Vertical	Peak
4883.52	50.62	31.43	9.59	36.73	54.91	74.00	-19.09	Vertical	
7319.96	48.02	36.30	11.99	34.92	61.39	74.00	-12.61	Vertical	
12210.02	40.00	39.57	14.52	32.79	61.30	74.00	-12.70	Vertical	
4883.52	34.83	31.43	9.59	36.73	39.12	54.00	-14.88	Vertical	Average
7319.96	26.05	36.30	11.99	34.92	39.42	54.00	-14.58	Vertical	
12210.01	21.98	39.57	14.52	32.79	43.28	54.00	-10.72	Vertical	
1198.10	48.78	26.29	4.66	36.57	43.16	74.00	-30.84	Horizontal	Peak
4883.52	48.98	31.43	9.59	36.73	53.27	74.00	-20.73	Horizontal	
7319.96	50.20	36.30	11.99	34.92	63.57	74.00	-10.43	Horizontal	
12210.02	38.63	39.57	14.52	32.79	59.93	74.00	-14.07	Horizontal	
4883.52	35.45	31.43	9.59	36.73	39.74	54.00	-14.26	Horizontal	Average
7319.97	31.13	36.30	11.99	34.92	44.50	54.00	-9.50	Horizontal	
12210.03	21.47	39.57	14.52	32.79	42.77	54.00	-11.23	Horizontal	

CH78 for GFSK									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Polarization	Test value
1198.10	47.41	26.29	4.66	36.57	41.79	74.00	-32.21	Vertical	Peak
4958.68	52.45	31.46	9.64	36.52	57.03	74.00	-16.97	Vertical	
7451.57	43.22	36.20	12.24	34.86	56.80	74.00	-17.20	Vertical	
12429.54	36.78	39.04	14.39	32.76	57.45	74.00	-16.55	Vertical	
4958.68	34.79	31.46	9.64	36.52	39.37	54.00	-14.63	Vertical	Average
7451.57	23.57	36.20	12.24	34.86	37.15	54.00	-16.85	Vertical	
12429.55	20.75	39.04	14.39	32.76	41.42	54.00	-12.58	Vertical	
1198.10	47.14	26.29	4.66	36.57	41.52	74.00	-32.48	Horizontal	Peak
4958.68	55.66	31.46	9.64	36.52	60.24	74.00	-13.76	Horizontal	
7451.57	46.23	36.20	12.24	34.86	59.81	74.00	-14.19	Horizontal	
12429.54	35.14	39.04	14.39	32.76	55.81	74.00	-18.19	Horizontal	
4958.68	37.15	31.46	9.64	36.52	41.73	54.00	-12.27	Horizontal	Average
7451.57	28.43	36.20	12.24	34.86	42.01	54.00	-11.99	Horizontal	
12429.55	21.09	39.04	14.39	32.76	41.76	54.00	-12.24	Horizontal	



➤ Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The peak level is lower than average limit(54dBuV/m), this data is the too weak instrument of signal is unable to test. The emission levels of other frequencies are very lower than the limit and not show in test report.






## 6. TEST SETUP PHOTOS


Radiated Emission:

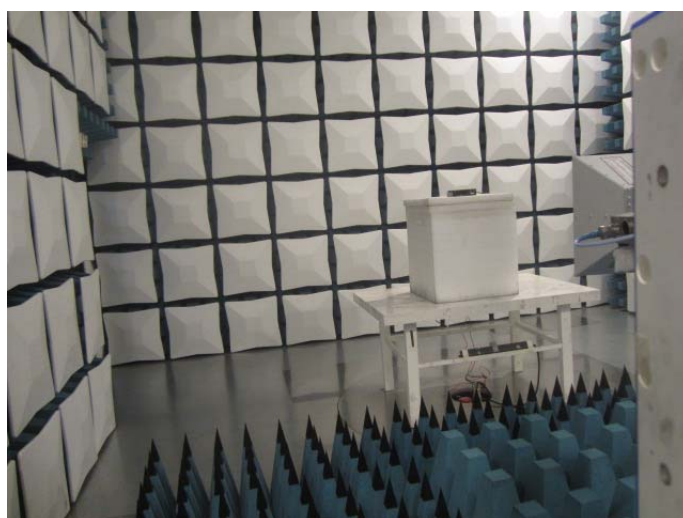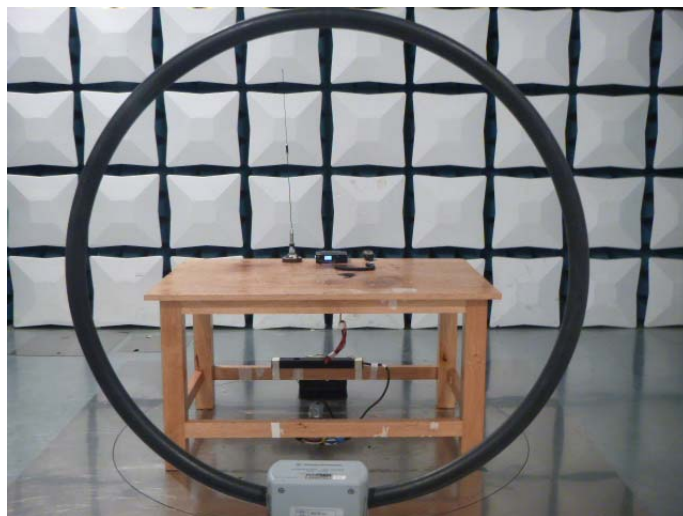


## 7. EXTERANAL AND INTERNAL PHOTOS External Photos of the EUT

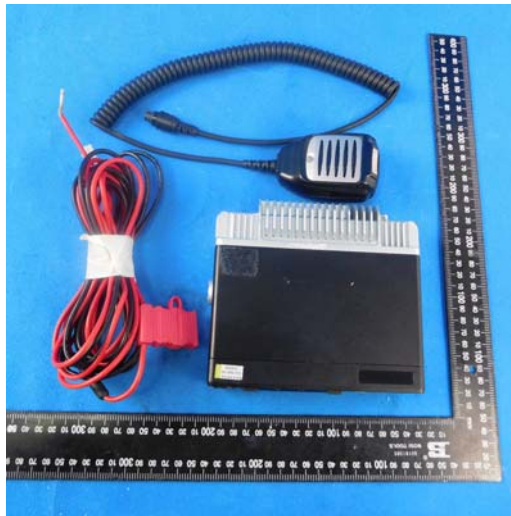


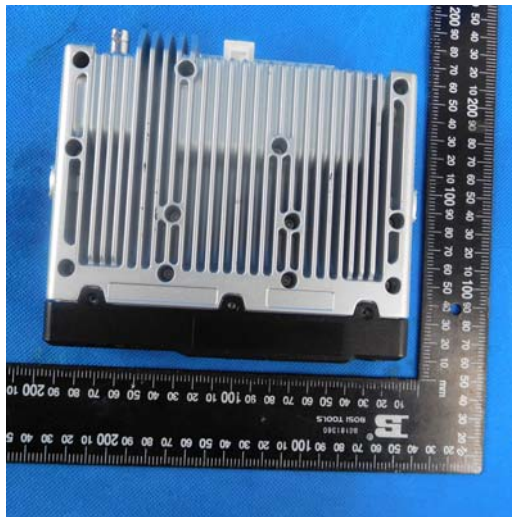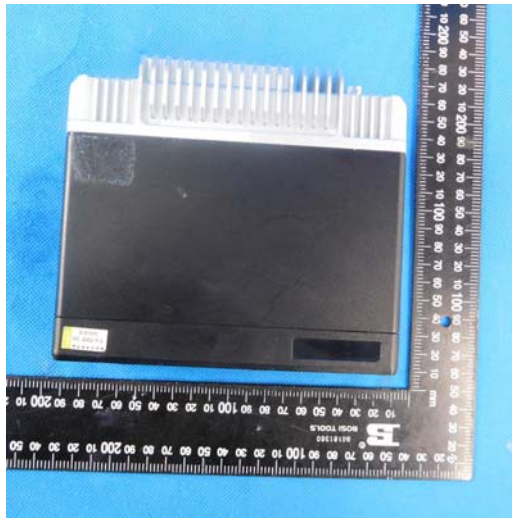



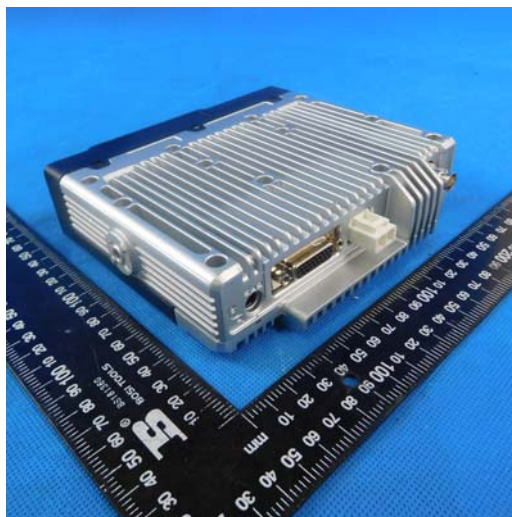



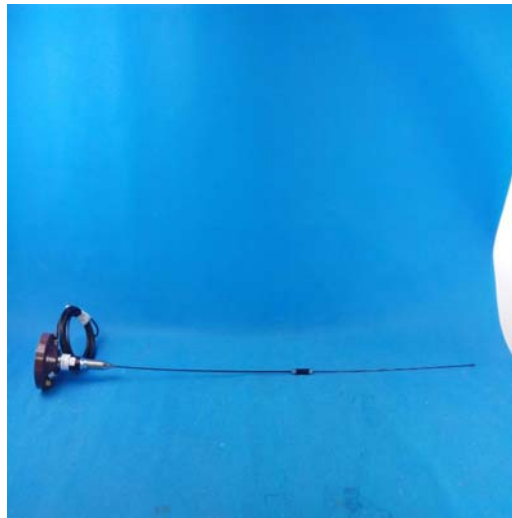


### Internal Photos of the EUT


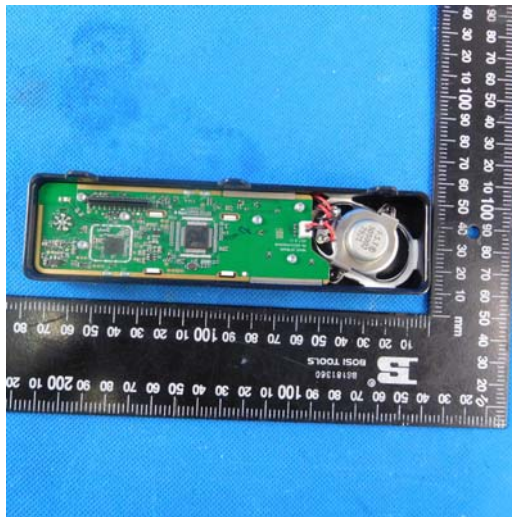


BT ANT

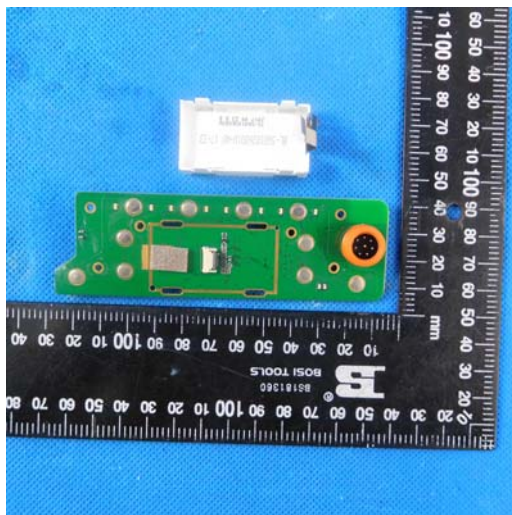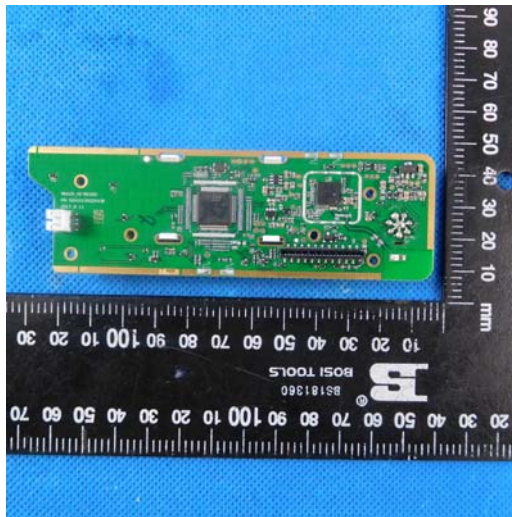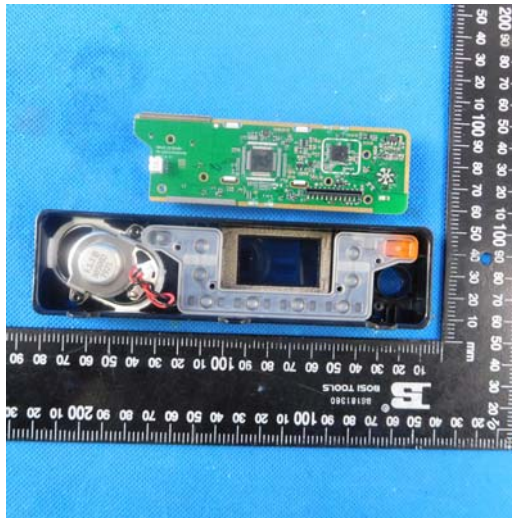

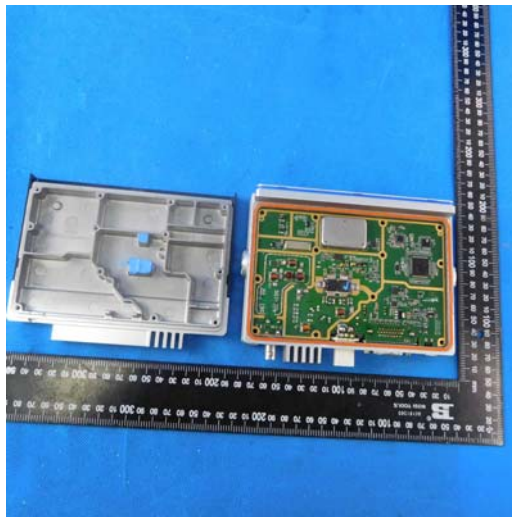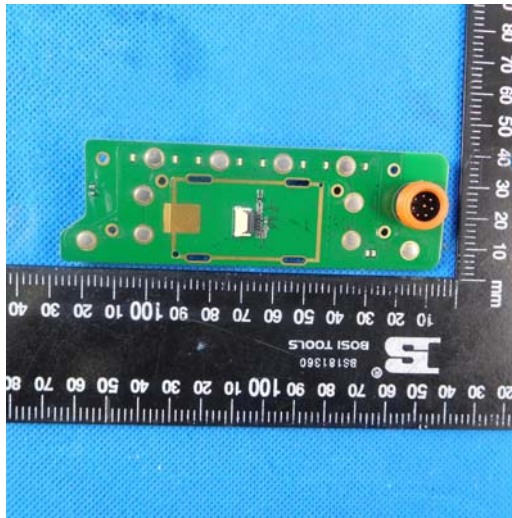



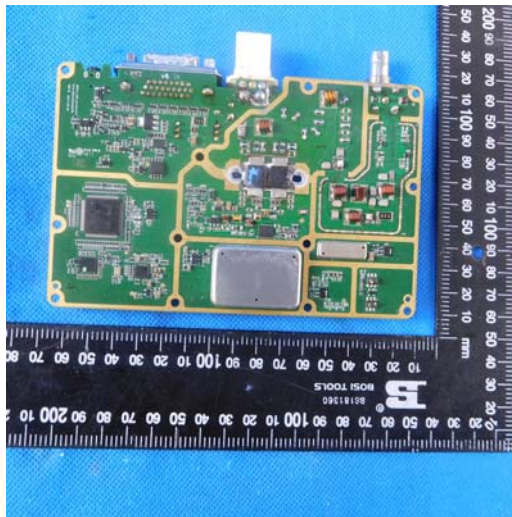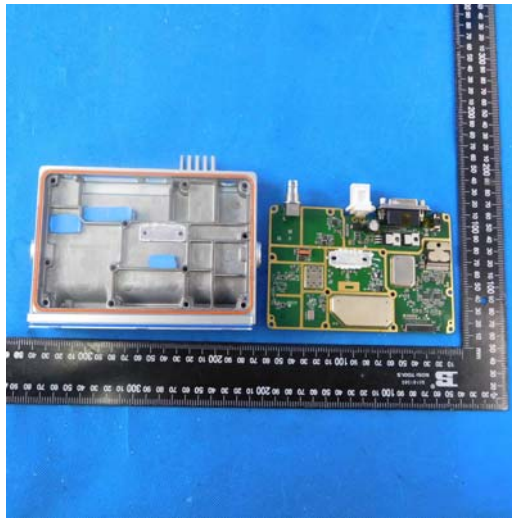



-----End of Report-----