

Fig.A.6.1.93 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch9, 7.5 GHz-10 GHz)

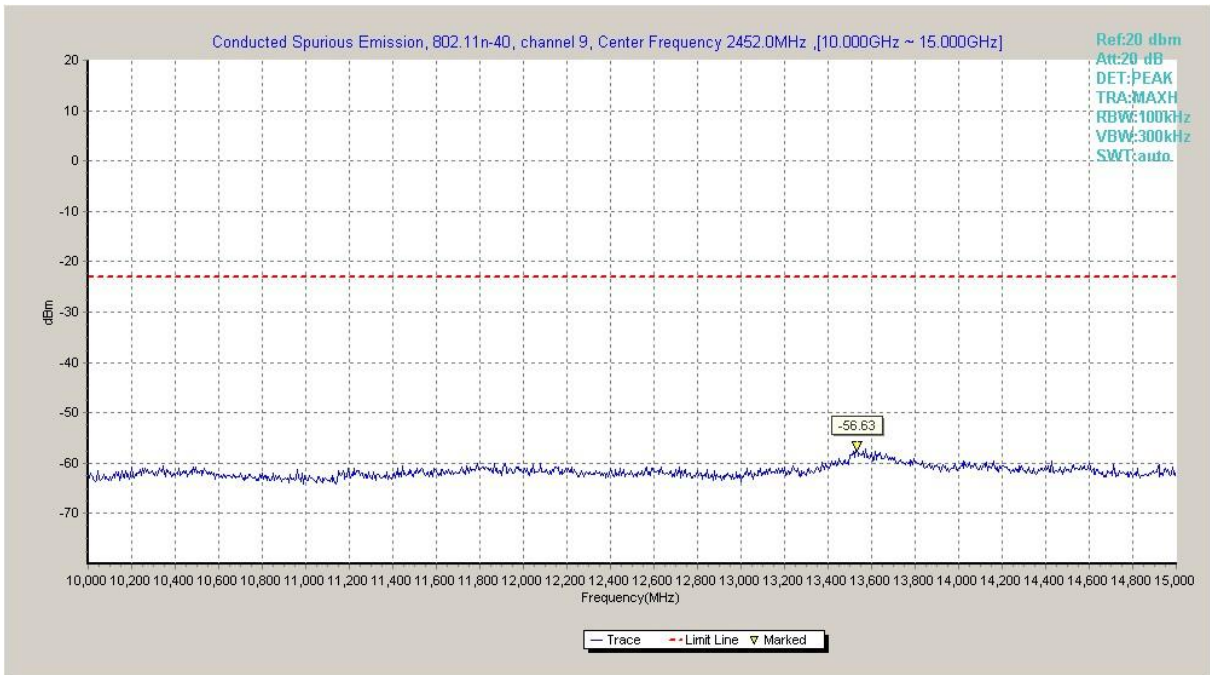


Fig.A.6.1.94 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch9, 10 GHz-15 GHz)

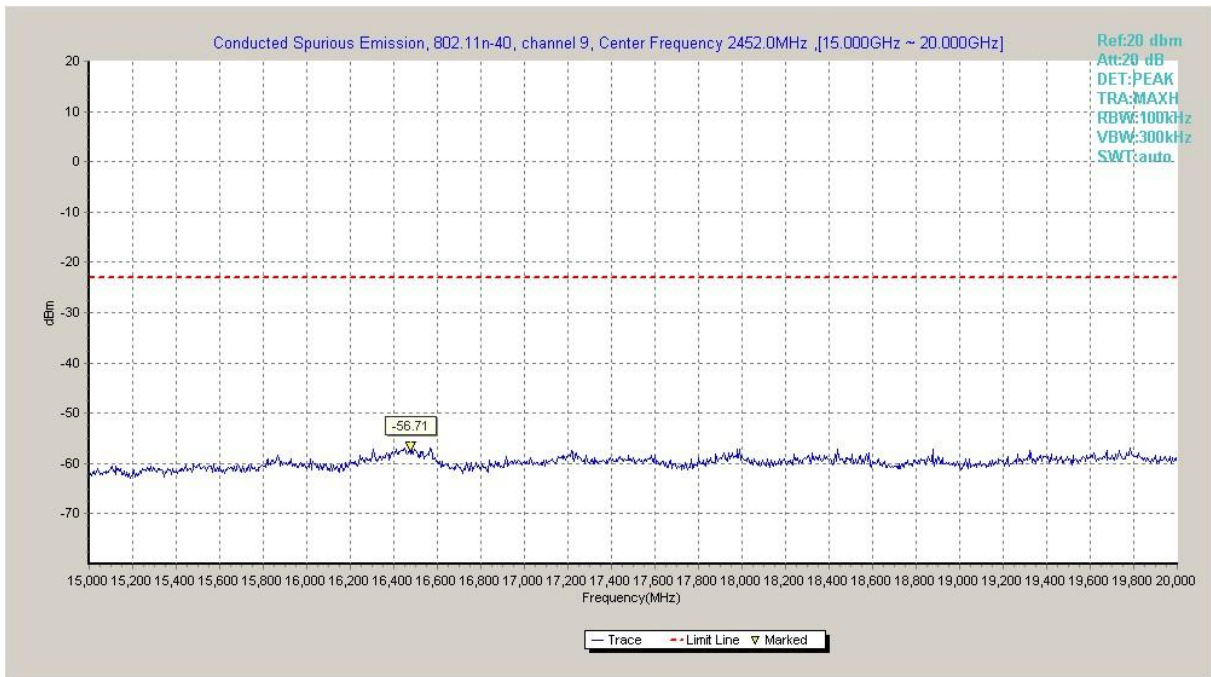


Fig.A.6.1.95 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch9, 15 GHz-20 GHz)

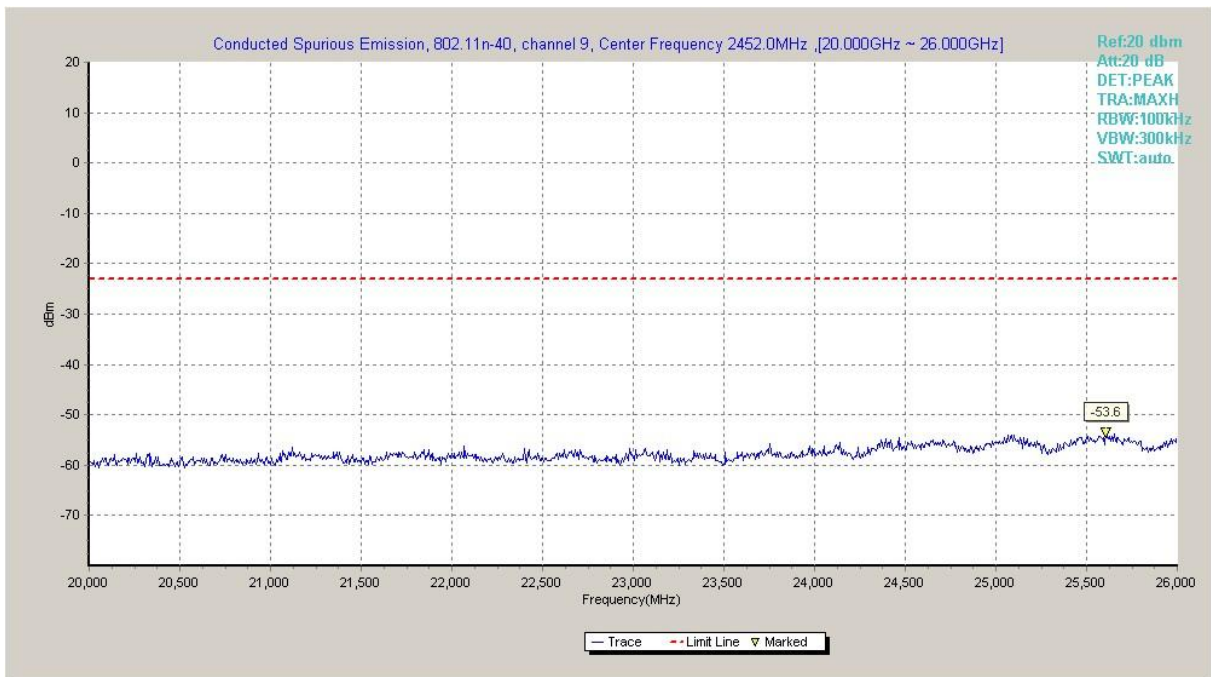


Fig.A.6.1.96 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch9, 20 GHz-26 GHz)

A.6.2 Transmitter Spurious Emission - Radiated

Method of Measurement: See ANSI C63.10-2013-clause 6.4 & 6.5 & 6.6

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247, 15.205, 15.209	20dB below peak output power

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Limit in restricted band:

Frequency of emission (MHz)	Field strength(μ V/m)	Field strength(dBuV/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Frequency (MHz)	Field strength(μ V/m)	Measurement distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30

Test Condition

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	100KHz/300KHz	5
1000-4000	1MHz/1MHz	15
4000-18000	1MHz/1MHz	40
18000-26500	1MHz/1MHz	20

EUT ID: EUT1

Measurement Results for Set.4:

802.11b mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11b	Power	2.38GHz ~2.43GHz	Fig.A.6.2.1	P
	Power	2.45GHz ~2.5GHz	Fig.A.6.2.2	P

802.11g mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11g	Power	2.38GHz ~2.43GHz	Fig.A.6.2.3	P
	Power	2.45GHz ~2.5GHz	Fig.A.6.2.4	P

802.11n-HT20 mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11n	Power	2.38GHz ~2.43GHz	Fig.A.6.2.5	P
	Power	2.45GHz ~2.5GHz	Fig.A.6.2.6	P

802.11n-HT40 mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11n	Power	2.38GHz ~2.43GHz	Fig.A.6.2.7	P
	Power	2.45GHz ~2.5GHz	Fig.A.6.2.8	P

Conclusion: Pass

Note:

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

P_{Mea} is the field strength recorded from the instrument.

The measurement results are obtained as described below:

$$\text{Result} = P_{Mea} + A_{Rpl} = P_{Mea} + \text{Cable Loss} + \text{Antenna Factor}$$



802.11b-Average

Ch1

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Antenna Pol. (H/V)
2389.945	39.9	-38.8	27.7	51.000	H
17781.000	31.8	-18.5	45.6	4.700	H
17973.000	31.8	-17.7	45.6	3.900	V
17976.000	31.7	-17.7	45.6	3.800	H
17886.000	31.7	-18.5	45.6	4.600	H
17980.500	31.7	-17.7	45.6	3.800	H

Ch6

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Antenna Pol. (H/V)
17959.500	31.8	-17.7	45.6	3.900	H
17997.000	31.7	-17.7	45.6	3.800	H
18000.000	31.7	-45.6	44.5	32.766	V
17850.000	31.7	-18.5	45.6	4.600	H
17928.000	31.6	-17.7	45.6	3.700	H
17971.500	31.6	-17.7	45.6	3.700	H

Ch11

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Antenna Pol. (H/V)
2483.535	40.6	-38.9	27.7	51.800	H
17877.000	31.6	-18.5	45.6	4.500	H
17937.000	31.6	-17.7	45.6	3.700	V
17872.500	31.6	-18.5	45.6	4.500	H
17997.000	31.5	-17.7	45.6	3.600	H
17883.000	31.5	-18.5	45.6	4.400	H



802.11b-Peak

Ch1

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Antenna Pol. (H/V)
2389.460	52.5	-38.8	27.7	63.600	H
17868.000	44.3	-18.5	45.6	17.200	H
17725.500	44.1	-18.9	45.6	17.400	V
17629.500	44.1	-18.9	45.6	17.400	H
17791.500	44.1	-18.5	45.6	17.000	H
17971.500	44.0	-17.7	45.6	16.100	H

Ch6

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Antenna Pol. (H/V)
17487.000	44.4	-19.2	41.5	22.100	H
17799.000	44.3	-18.5	45.6	17.200	H
17910.000	43.9	-18.5	45.6	16.800	V
17439.000	43.8	-19.2	41.5	21.500	H
17370.000	43.7	-19.5	41.5	21.700	H
17950.500	43.7	-17.7	45.6	15.800	H

Ch11

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Antenna Pol. (H/V)
2483.620	52.5	-38.9	27.7	63.700	H
17940.000	44.6	-17.7	45.6	16.700	H
17509.500	44.5	-19.2	45.6	18.100	V
17796.000	44.4	-18.5	45.6	17.300	H
17566.500	44.2	-18.9	45.6	17.500	H
17475.000	44.0	-19.2	41.5	21.700	H



802.11g - Average

Ch1

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Antenna Pol. (H/V)
2389.985	42.9	-38.8	27.7	54.000	H
17811.000	31.7	-18.5	45.6	4.600	H
17956.500	31.7	-17.7	45.6	3.800	V
17934.000	31.7	-17.7	45.6	3.800	H
17965.500	31.7	-17.7	45.6	3.800	H
17976.000	31.6	-17.7	45.6	3.700	H

Ch6

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Antenna Pol. (H/V)
17977.500	31.8	-17.7	45.6	3.900	H
17433.000	31.7	-19.2	41.5	9.400	H
17959.500	31.7	-17.7	45.6	3.800	V
17940.000	31.7	-17.7	45.6	3.800	H
17880.000	31.7	-18.5	45.6	4.600	H
17823.000	31.7	-18.5	45.6	4.600	H

Ch11

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Antenna Pol. (H/V)
2483.515	51.0	-38.9	27.7	62.200	H
17959.500	31.9	-17.7	45.6	4.000	H
17971.500	31.8	-17.7	45.6	3.900	V
17820.000	31.8	-18.5	45.6	4.700	H
17809.500	31.8	-18.5	45.6	4.700	H
17946.000	31.8	-17.7	45.6	3.900	H



802.11g - Peak

Ch1

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Antenna Pol. (H/V)
2389.960	55.6	-38.8	27.7	66.700	H
17319.000	45.2	-19.5	41.5	23.200	H
17473.500	45.1	-19.2	41.5	22.800	V
17868.000	45.0	-18.5	45.6	17.900	H
17968.500	44.7	-17.7	45.6	16.800	H
17707.500	44.0	-18.9	45.6	17.300	H

Ch6

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Antenna Pol. (H/V)
17830.5	44.2	-18.5	45.6	17.1	H
17652	44.2	-18.9	45.6	17.5	H
17766	44.2	-18.5	45.6	17.1	V
17556	44.1	-19.2	45.6	17.7	H
17418	44.1	-19.2	41.5	21.8	H
17976	44	-17.7	45.6	16.1	H

Ch11

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Antenna Pol. (H/V)
2483.585	69.7	-38.9	27.7	80.900	H
17484.000	44.6	-19.2	41.5	22.300	H
17571.000	44.6	-18.9	45.6	17.900	V
17916.000	44.5	-17.7	45.6	16.600	H
17715.000	44.2	-18.9	45.6	17.500	H
17508.000	44.2	-19.2	45.6	17.800	H

802.11n-HT20-Average

Ch1

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Antenna Pol. (H/V)
2390.000	43.2	-38.8	27.7	54.300	H
17874.000	32.0	-18.5	45.6	4.900	H
17967.000	32.0	-17.7	45.6	4.100	V
17893.500	31.9	-18.5	45.6	4.800	H
17965.500	31.9	-17.7	45.6	4.000	H
17977.500	31.8	-17.7	45.6	3.900	H

Ch6

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Antenna Pol. (H/V)
17974.500	32.0	-17.7	45.6	4.100	H
17473.500	31.9	-19.2	41.5	9.600	H
17977.500	31.9	-17.7	45.6	4.000	V
17952.000	31.9	-17.7	45.6	4.000	H
17940.000	31.9	-17.7	45.6	4.000	H
17770.500	31.9	-18.5	45.6	4.800	H

Ch11

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Antenna Pol. (H/V)
2483.505	53.0	-38.9	27.7	64.200	H
17959.500	32.1	-17.7	45.6	4.200	H
17857.500	32.1	-18.5	45.6	5.000	V
17820.000	32.1	-18.5	45.6	5.000	H
17998.500	32.0	-17.7	45.6	4.100	H
17985.000	32.0	-17.7	45.6	4.100	H



802.11n-HT20-Peak

Ch1

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Antenna Pol. (H/V)
2389.920	56.3	-38.8	27.7	67.400	H
17391.000	45.0	-19.2	41.5	22.700	H
17824.500	44.4	-18.5	45.6	17.300	V
17866.500	44.4	-18.5	45.6	17.300	H
17977.500	44.1	-17.7	45.6	16.200	H
17601.000	44.1	-18.9	45.6	17.400	H

Ch6

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Antenna Pol. (H/V)
17817.000	44.4	-18.5	45.6	17.300	H
17811.000	44.4	-18.5	45.6	17.300	H
17677.500	44.2	-18.9	45.6	17.500	V
17724.000	43.9	-18.9	45.6	17.200	H
17598.000	43.9	-18.9	45.6	17.200	H
17769.000	43.9	-18.5	45.6	16.800	H

Ch11

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Antenna Pol. (H/V)
2483.545	71.3	-38.9	27.7	82.500	H
17973.000	44.3	-17.7	45.6	16.400	H
17923.500	44.2	-17.7	45.6	16.300	V
17808.000	44.1	-18.5	45.6	17.000	H
18000.000	44.1	-45.6	44.5	45.166	H
17758.500	44.0	-18.5	45.6	16.900	H



802.11n-HT40-Average

Ch3

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Antenna Pol. (H/V)
2389.995	42.9	-38.8	27.7	54.000	H
17454.000	32.0	-19.2	41.5	9.700	H
17971.500	32.0	-17.7	45.6	4.100	V
17962.500	32.0	-17.7	45.6	4.100	H
17989.500	32.0	-17.7	45.6	4.100	H
17820.000	32.0	-18.5	45.6	4.900	H

Ch6

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Antenna Pol. (H/V)
17976.000	32.0	-17.7	45.6	4.100	H
17755.500	32.0	-18.5	45.6	4.900	H
17791.500	32.0	-18.5	45.6	4.900	V
17971.500	32.0	-17.7	45.6	4.100	H
17959.500	32.0	-17.7	45.6	4.100	H
17845.500	32.0	-18.5	45.6	4.900	H

Ch9

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Antenna Pol. (H/V)
2483.535	52.0	-38.9	27.7	63.200	H
17964.000	32.2	-17.7	45.6	4.300	H
17857.500	32.1	-18.5	45.6	5.000	V
17847.000	32.0	-18.5	45.6	4.900	H
17974.500	32.0	-17.7	45.6	4.100	H
17841.000	32.0	-18.5	45.6	4.900	H



802.11n-HT40-Peak

Ch3

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Antenna Pol. (H/V)
2389.985	55.5	-38.8	27.7	66.600	H
17479.500	44.7	-19.2	41.5	22.400	H
17481.000	44.6	-19.2	41.5	22.300	V
17749.500	44.3	-18.5	45.6	17.200	H
17769.000	44.3	-18.5	45.6	17.200	H
17830.500	44.2	-18.5	45.6	17.100	H

Ch6

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Antenna Pol. (H/V)
17478.000	45.0	-19.2	41.5	22.700	H
17466.000	44.6	-19.2	41.5	22.300	H
17844.000	44.5	-18.5	45.6	17.400	V
17862.000	44.2	-18.5	45.6	17.100	H
17683.500	44.1	-18.9	45.6	17.400	H
17556.000	44.0	-19.2	45.6	17.600	H

Ch9

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Antenna Pol. (H/V)
2484.445	69.2	-38.9	27.7	80.400	H
17872.500	45.0	-18.5	45.6	17.900	H
17452.500	44.9	-19.2	41.5	22.600	V
17769.000	44.5	-18.5	45.6	17.400	H
17392.500	44.5	-19.2	41.5	22.200	H
17818.500	44.5	-18.5	45.6	17.400	H

Test graphs as below:

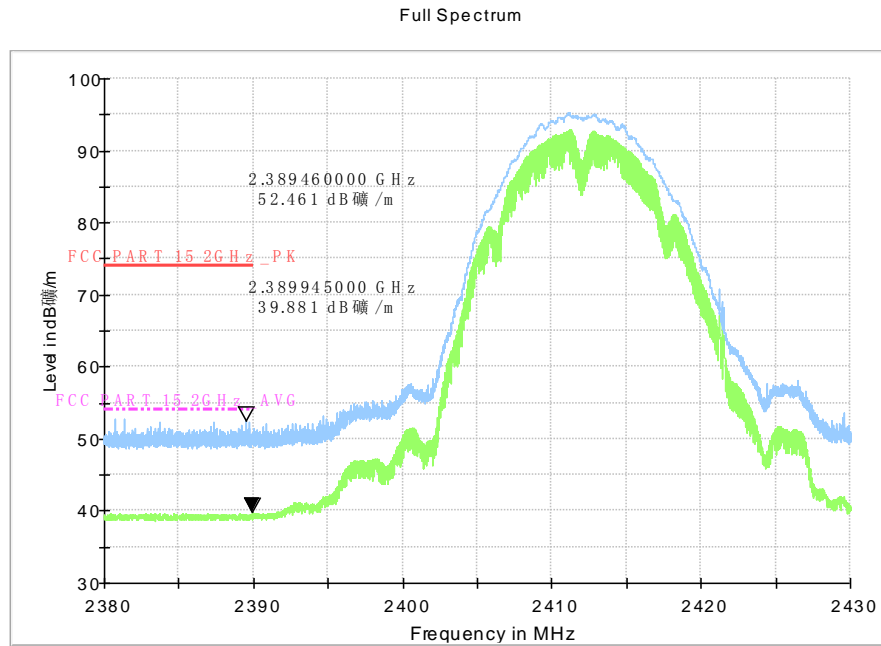


Fig.A.6.2.1 Transmitter Spurious Emission - Radiated (Power): 802.11b, ch1, 2.38 GHz – 2.43GHz

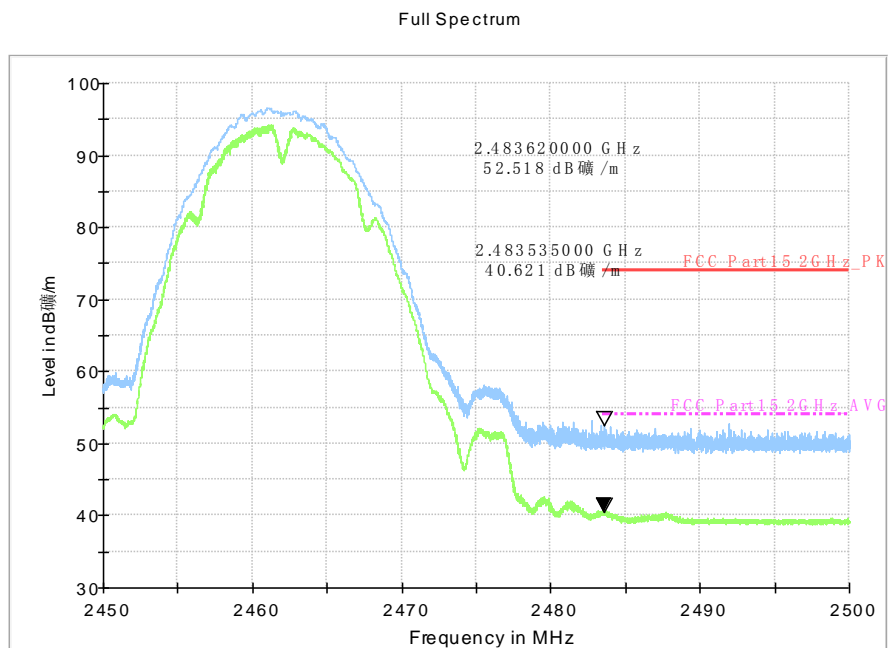


Fig.A.6.2.2 Transmitter Spurious Emission - Radiated (Power): 802.11b, ch11, 2.45 GHz - 2.50GHz

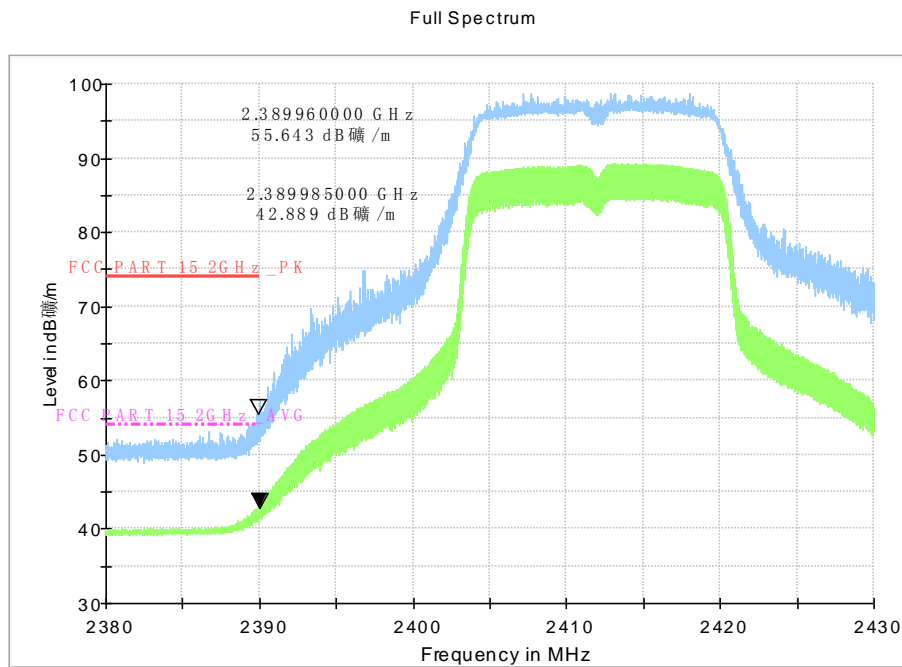


Fig.A.6.2.3 Transmitter Spurious Emission - Radiated (Power): 802.11g, ch1, 2.38 GHz - 2.43GHz

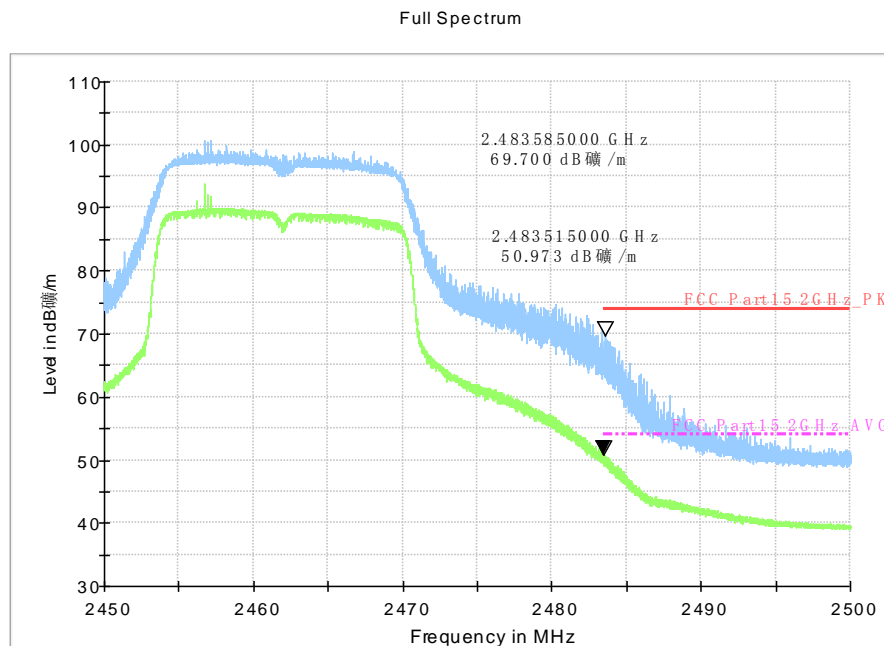


Fig.A.6.2.4 Transmitter Spurious Emission - Radiated (Power): 802.11g, ch11, 2.45 GHz - 2.50GHz

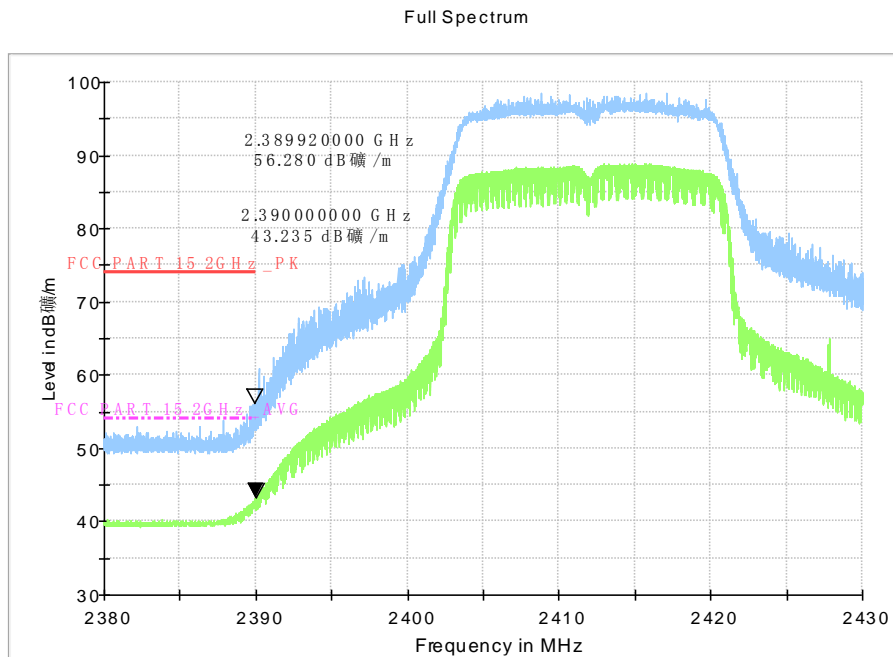


Fig.A.6.2.5 Transmitter Spurious Emission - Radiated (Power): 802.11n-HT20, ch1, 2.38 GHz - 2.45GHz

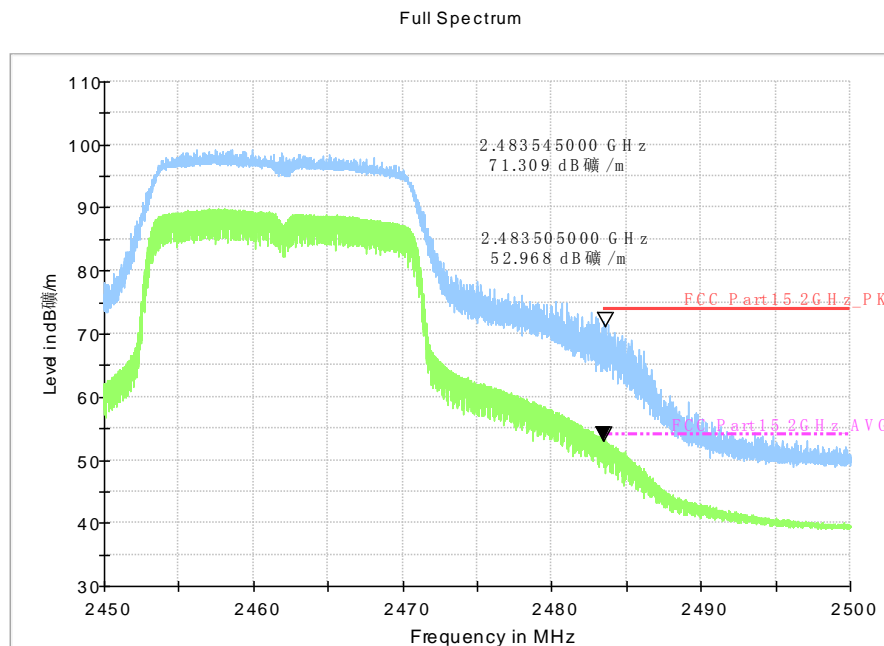


Fig.A.6.2.6 Transmitter Spurious Emission - Radiated (Power): 802.11n-HT20, ch11, 2.45 GHz - 2.50GHz

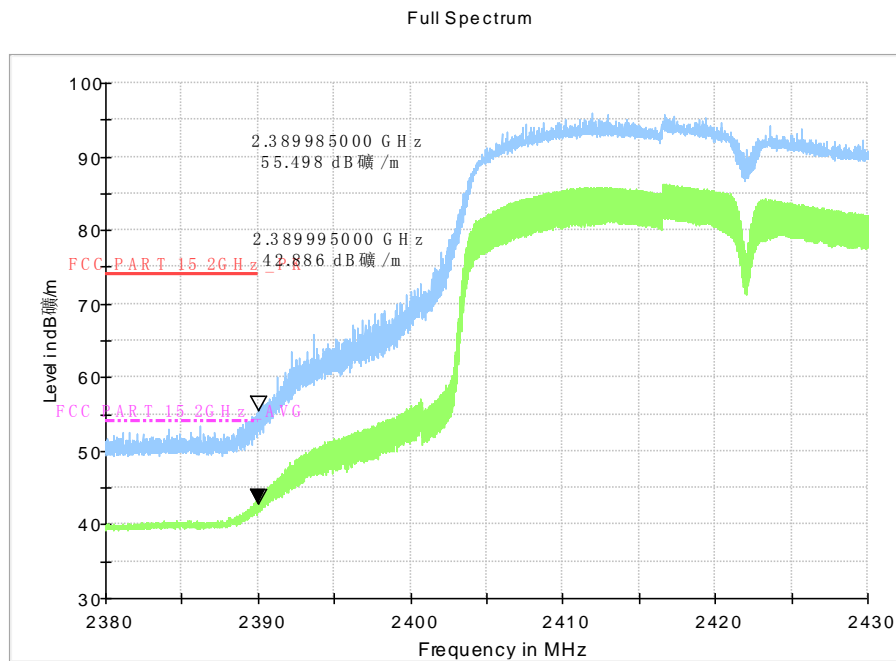


Fig.A.6.2.7 Transmitter Spurious Emission - Radiated (Power): 802.11n-HT40, ch3, 2.38 GHz - 2.43GHz

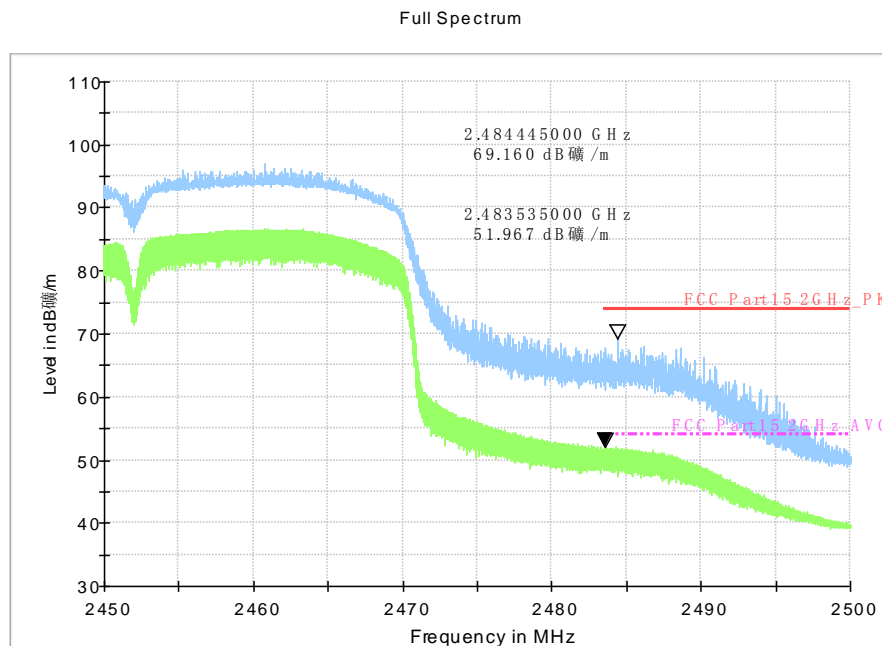


Fig.A.6.2.8 Transmitter Spurious Emission - Radiated (Power): 802.11n-HT40, ch9, 2.45 GHz - 2.50GHz

A.7. AC Power-line Conducted Emission

Method of Measurement: See ANSI C63.10-2013-clause 6.2

- 1 The one EUT cable configuration and arrangement and mode of operation that produced the emission with the highest amplitude relative to the limit is selected for the final measurement, while applying the appropriate modulating signal to the EUT.
- 2 If the EUT is relocated from an exploratory test site to a final test site, the highest emissions shall be maximized at the final test location before final ac power-line conducted emission measurements are performed.
- 3 The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment in the system) is then performed for the full frequency range for which the EUT is being tested for compliance without further variation of the EUT arrangement, cable positions, or EUT mode of operation.
- 4 If the EUT is comprised of equipment units that have their own separate ac power connections, e.g., floor-standing equipment with independent power cords for each shelf that are able to connect directly to the ac power network, each current-carrying conductor of one unit is measured while the other units are connected to a second (or more) LISN(s). All units shall be separately measured. If a power strip is provided by the manufacturer, to supply all of the units making up the EUT, only the conductors in the power cord of the power strip shall be measured.
- 5 If the EUT uses a detachable antenna, these measurements shall be made with a suitable dummy load connected to the antenna output terminals; otherwise, the tests shall be made with the antenna connected and, if adjustable, fully extended. When measuring the ac conducted emissions from a device that operates between 150 kHz and 30 MHz a non-detachable antenna may be replaced with a dummy load for the measurements within the fundamental emission band of the transmitter, but only for those measurements.³⁶ Record the six highest EUT emissions relative to the limit of each of the current-carrying conductors of the power cords of the equipment that comprises the EUT over the frequency range specified by the procuring or regulatory agency. Diagram or photograph the test setup that was used. See Clause 8 for full reporting requirements.

Test Condition:

Voltage (V)	Frequency (Hz)
120	60

Measurement Result and limit:

WLAN (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dB μ V)	Result (dB μ V)		Conclusion
		With charger		
		802.11b	Idle	
0.15 to 0.5	66 to 56	Fig.A.7.1	Fig.A.7.2	P
0.5 to 5	56			
5 to 30	60			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Average Limit)

Frequency range (MHz)	Average Limit (dB μ V)	Result (dB μ V)		Conclusion
		With charger		
		802.11b	Idle	
0.15 to 0.5	56 to 46	Fig.A.7.1	Fig.A.7.2	P
0.5 to 5	46			
5 to 30	50			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Conclusion: Pass

Test graphs as below:

Traffic: Set.4

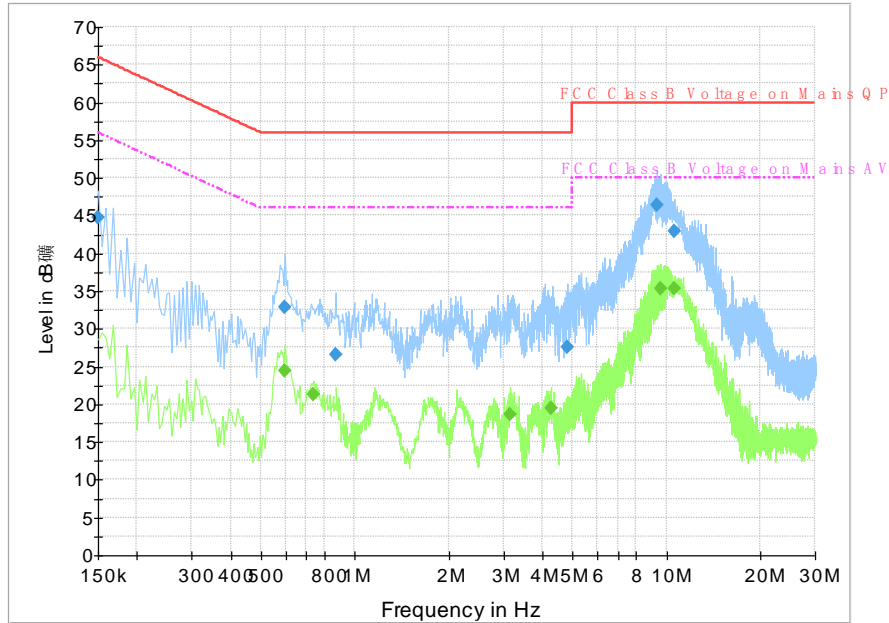


Fig.A.7.1 AC Powerline Conducted Emission-802.11b

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth h (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.150000	44.7	2000.	9.000	On	L1	30.7	21.3	66.0	
0.595500	32.9	2000.	9.000	On	L1	19.8	23.1	56.0	
0.865500	26.6	2000.	9.000	On	N	19.7	29.4	56.0	
4.807500	27.5	2000.	9.000	On	N	19.6	28.5	56.0	
9.303000	46.4	2000.	9.000	On	L1	19.7	13.6	60.0	
10.576500	42.9	2000.	9.000	On	L1	19.7	17.1	60.0	

Final Result 2

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.595500	24.5	2000.	9.000	On	L1	19.8	21.5	46.0	
0.739500	21.3	2000.	9.000	On	L1	19.8	24.7	46.0	
3.165000	18.6	2000.	9.000	On	L1	19.6	27.4	46.0	
4.249500	19.5	2000.	9.000	On	L1	19.6	26.5	46.0	
9.564000	35.3	2000.	9.000	On	L1	19.7	14.7	50.0	
10.567500	35.4	2000.	9.000	On	L1	19.7	14.6	50.0	

Idle: Set.4

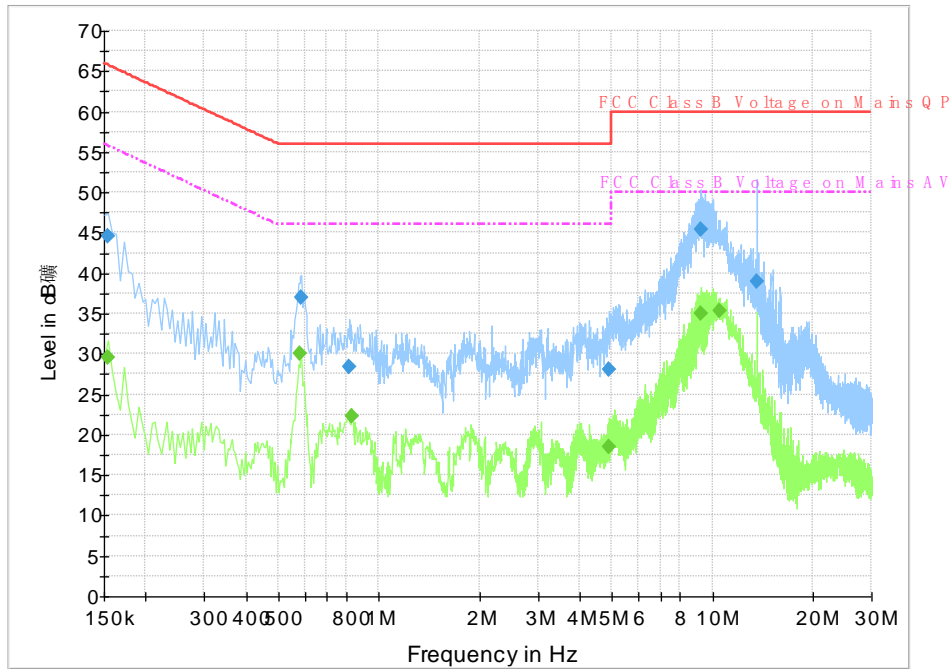


Fig.A.7.2 AC Powerline Conducted Emission-Idle

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth h (kHz)	Filter	Line	Corr. (dB)	Margi n (dB)	Limit (dBµV)	Commen t
0.154500	44.6	2000.	9.000	On	L1	29.7	21.2	65.8	
0.586500	37.0	2000.	9.000	On	L1	19.8	19.0	56.0	
0.816000	28.3	2000.	9.000	On	N	19.7	27.7	56.0	
4.915500	28.1	2000.	9.000	On	N	19.6	27.9	56.0	
9.235500	45.3	2000.	9.000	On	L1	19.7	14.7	60.0	
13.560000	39.0	2000.	9.000	On	L1	19.8	21.0	60.0	

Final Result 2

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.154500	29.5	2000.	9.000	On	L1	29.7	26.3	55.8	
0.582000	30.0	2000.	9.000	On	L1	19.8	16.0	46.0	
0.829500	22.3	2000.	9.000	On	L1	19.7	23.7	46.0	
4.893000	18.5	2000.	9.000	On	L1	19.6	27.5	46.0	
9.280500	35.0	2000.	9.000	On	L1	19.7	15.0	50.0	
10.500000	35.3	2000.	9.000	On	L1	19.7	14.7	50.0	

ANNEX B: Accreditation Certificate

United States Department of Commerce
National Institute of Standards and Technology

NVLAP[®]

Certificate of Accreditation to ISO/IEC 17025:2005

NVLAP LAB CODE: 600118-0

Telecommunication Technology Labs, CAICT
Beijing
China

*is accredited by the National Voluntary Laboratory Accreditation Program for specific services,
listed on the Scope of Accreditation, for:*

Electromagnetic Compatibility & Telecommunications

*This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005.
This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality
management system (refer to joint ISO-ILAC-IAF Communique dated January 2009).*

2018-09-28 through 2019-09-30
Effective Dates




For the National Voluntary Laboratory Accreditation Program

END OF REPORT