Label & Location (MPA2MPSU and MPA4MPSU)



Label position

Label

WIGTN

MPA2MPSU / MPA4MPSU

Rated Voltage: 100 - 240 VAC Rated Frequency: 50 - 60 Hz

Rated Current: 1.1 A

CAN ICES-003(B)/NMB-003(B)

FCC ID: 2A8LTMPA24 IC: 1609A-MPA24

LISTED
Equipment
BP21172
his device complies with part 15 of the FCC R

SECURITY

This device complies with part 15 of the FCC Rules, Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Honeywell North America Representative:

Honeywell Commercial Security 715 Peachtree St. NE Atlanta, GA 30308 USA

CAN/ULC 60839-11-1 Access Control Grade 1








length

9,4 cm +/- 0,1

Label & Location (MPA2MPSU and MPA4MPSU)

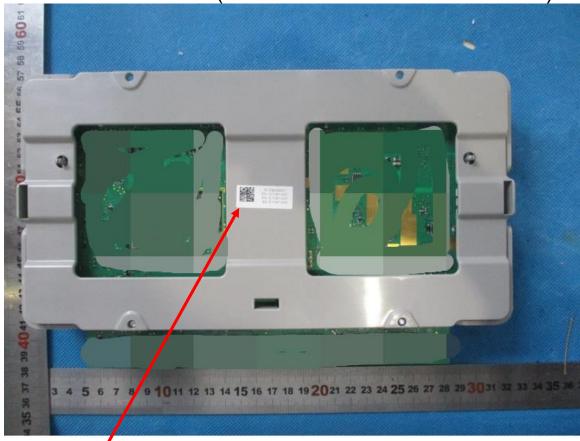

Label position

MPA2C3 / MPA2C3-4

Output Voltage: 10-14 V == Output Current: 3 A

UK





CAN ICES-003(B)/NMB-003(B)

FC.

FCC ID: 2A8LTMPA24 IC: 1609A-MPA24

This device complies with part 15 of the FCC Rules, Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

UK Representative:

Honeywell Building Technology Building 5 Carlton Park King Edward Avenue Narborough Leicester LE19-0AL United Kingdom

EU Representative:

Honeywell Novar GmbH Johannes-Mauthe-Strasse 14 72458 Albstadt Germany

North America Representative:

Honeywell Commercial Security 715 Peachtree St. NE Atlanta, GA 30308 USA

800-27122 / A

38 mm

66	-	~
oo	m	m