


4

3

2

1

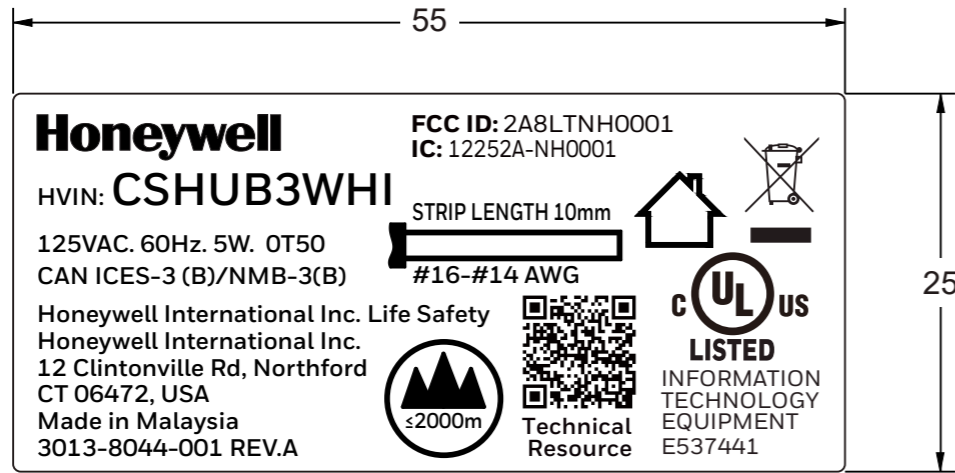

- 1. MATERIAL: MATT WHITE POLYESTER FILM, AND PERMANENT PRESSURE-SENSITIVE ACRYLIC ADHESIVE BACKING, 8 LK LINER.
- 2. MUST BE A UL RECOGNIZED COMPONENT LABEL. PER UL MARKING AND LABELING SYSTEM PGJ12, FOR APPLICATION ON ABS, AT A TEMPERATURE RANGE OF -50°F TO 200°F .
- 3. LABELS TO BE SUPPLIED ON CONTINUOUS RELEASE LINER IN ROLL FORM. SCRAP TO BE REMOVED.
- 4. ALL PRINTING TO BE BLACK (PMS PROCESS BLACK C). USING INDELIBLE INK.
- 5. ALL TOLERANCE +/-0.5MM UNLESS OTHER SPECIFICATION.
- 6. KEY: CUT _____
- 7. THIS PRODUCT MUST BE PRODUCED USING COMPLIANT MATERIALS AND PROCESSES PER ES 50040083.

NOT RELEASED

			<input type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>		FIRST USED ON	CSHUB3WHI		DWN.	YUNA	13-SEP-2023	Honeywell	
			MAT'L.		MAT'L. SPEC.		()		DIMENSIONS ARE IN:		THIRD ANGLE PROJECTION		DES.			
			OR _____		()		()		<input type="checkbox"/> INCHES				NEXT ASS'Y		ENVIRONMENTAL & COMBUSTION CONTROLS	
									<input type="checkbox"/> MILLIMETERS				REFERENCE		NAME	
									INDICATES DECREASING DIMENSION		INDICATES INCREASING DIMENSION				LABEL, NAMEPLATE	
									-TOLERANCE UNLESS NOTED-						PART NO.	
									MACHINED S ±5°		FORMED S ±2°				3013-8044-001	
									MILLIMETERS		INCHES		DEV. NO.		REV.	
									OVER 0 TO 6 ± 0.1		.0 ± .02		90130		A	
									6 TO 30 ± 0.2		.00 ± .01					
									30 TO 100 ± 0.3		.000 ± .010					
									100 TO 300 ± 0.5							
									300 TO 1000 ± 0.8							
									HONEYWELL CONFIDENTIAL AND PROPRIETARY		SIZE		SCALE		SHT 1 OF 1	
											B		2:1			

4

3

2