


4

3

2

1

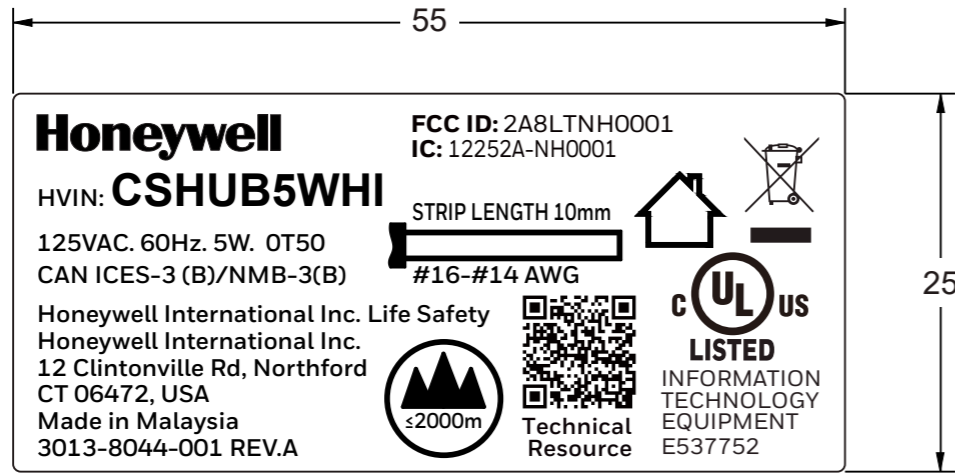

- 1. MATERIAL: MATT WHITE POLYESTER FILM, AND PERMANENT PRESSURE-SENSITIVE ACRYLIC ADHESIVE BACKING, 8 LK LINER.
- 2. MUST BE A UL RECOGNIZED COMPONENT LABEL. PER UL MARKING AND LABELING SYSTEM PGJ12, FOR APPLICATION ON ABS, AT A TEMPERATURE RANGE OF -50°F TO 200°F.
- 3. LABELS TO BE SUPPLIED ON CONTINUOUS RELEASE LINER IN ROLL FORM. SCRAP TO BE REMOVED.
- 4. ALL PRINTING TO BE BLACK (PMS PROCESS BLACK C). USING INDELIBLE INK.
- 5. ALL TOLERANCE +/-0.5MM UNLESS OTHER SPECIFICATION.
- 6. KEY: CUT _____
- 7. THIS PRODUCT MUST BE PRODUCED USING COMPLIANT MATERIALS AND PROCESSES PER ES 50040083.

NOT RELEASED

| | | | | | | | | | | | | | | | | |
|--|--|--|--------------------------|--|--------------------------|--|--------------------------|--|--|------------------|--------------------------------|------|--|-------------|--------------------------------------|--|
| | | | <input type="checkbox"/> | | <input type="checkbox"/> | | <input type="checkbox"/> | | FIRST USED ON | CSHUB3WHI | | DWN. | YUNA | 13-SEP-2023 | Honeywell | |
| | | | MAT'L. | | MAT'L. SPEC. | | () | | DIMENSIONS ARE IN: | | THIRD ANGLE PROJECTION | | DES. | | | |
| | | | OR _____ | | () | | () | | <input type="checkbox"/> INCHES | | | | NEXT ASS'Y | | ENVIRONMENTAL & COMBUSTION CONTROLS | |
| | | | | | | | | | <input type="checkbox"/> MILLIMETERS | | | | REFERENCE | | NAME | |
| | | | | | | | | | DRAFT CALLOUTS | | | | | | LABEL, NAMEPLATE | |
| | | | | | | | | | INDICATES DECREASING DIMENSION | | INDICATES INCREASING DIMENSION | | | | PART NO. | |
| | | | | | | | | | -TOLERANCE UNLESS NOTED- | | | | | | 3013-8044-001 | |
| | | | | | | | | | MACHINED S ±5° | | FORMED S ±2° | | | | REV. | |
| | | | | | | | | | MILLIMETERS | | INCHES | | DEV. NO. | | A | |
| | | | | | | | | | OVER 0 TO 6 ±0.1 | | .0 ±.02 | | 90130 | | SCALE 2:1 | |
| | | | | | | | | | 6 TO 30 ±0.2 | | .00 ±.01 | | HONEYWELL CONFIDENTIAL AND PROPRIETARY | | SHT 1 OF 1 | |
| | | | | | | | | | 30 TO 100 ±0.3 | | .000 ±.010 | | SIZE B | | ARCHIVE REF.NO. 1 3013-8044-001_A.ai | |
| | | | | | | | | | 100 TO 300 ±0.5 | | | | | | (MAC) | |
| | | | | | | | | | 300 TO 1000 ±0.8 | | | | | | | |
| | | | | | | | | | CONTROLLED BY DATABASE FILE: | | | | | | | |
| | | | | | | | | | DIMENSIONS & TOLERANCES PER ANSI Y14.5M-1994 & ECC ENGINEERING STANDARDS | | | | | | | |
| | | | | | | | | | A 06-28-2021 0165149 | | | | | | | |
| | | | | | | | | | REV. DATE E.O. | | | | | | | |

4

3

2