


Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5510MHz


Vertical

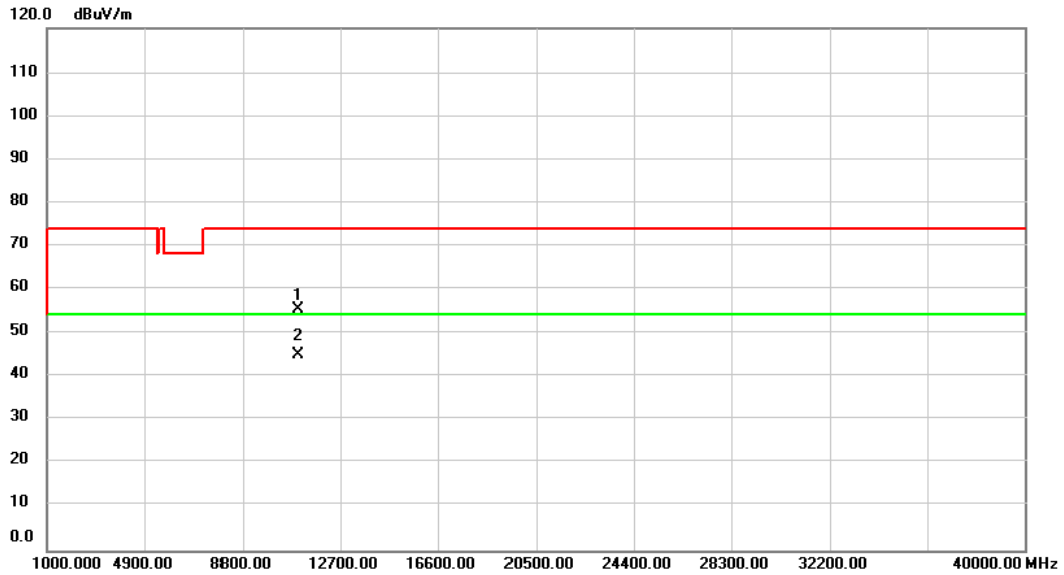

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11020.00	51.01	4.30	55.31	74.00	-18.69	peak	
2	*	11020.00	40.80	4.30	45.10	54.00	-8.90	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5510MHz


Horizontal

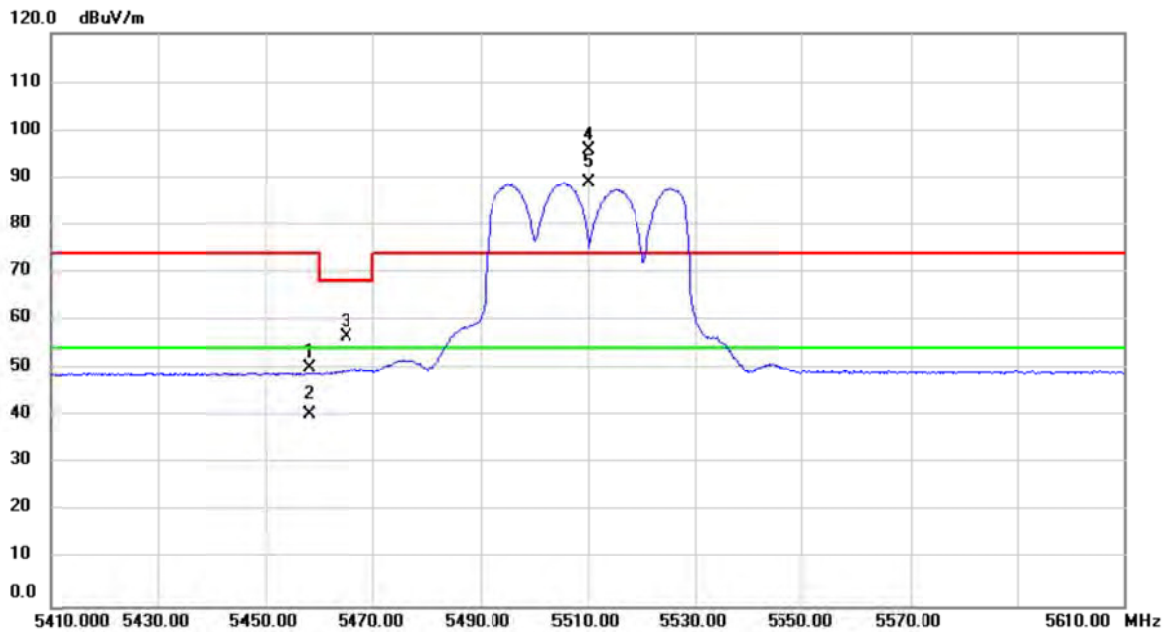

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5458.000	11.55	38.82	50.37	74.00	-23.63	peak	
2		5458.000	1.63	38.82	40.45	54.00	-13.55	AVG	
3		5465.080	17.86	38.83	56.69	68.20	-11.51	peak	
4	X	5510.000	57.06	38.89	95.95	74.00	21.95	peak	No Limit
5	*	5510.000	50.04	38.89	88.93	54.00	34.93	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5510MHz


Horizontal

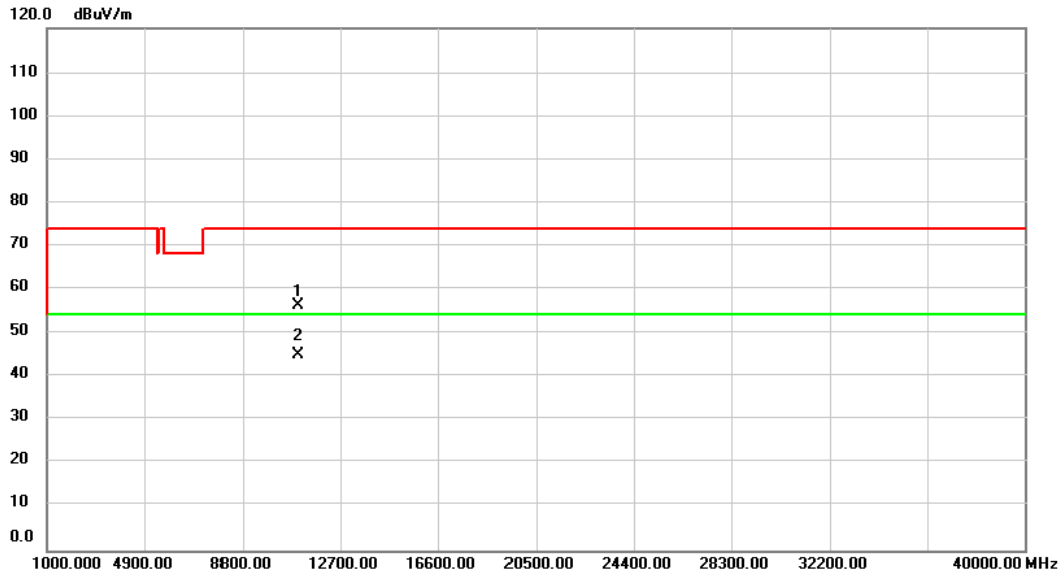

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11020.00	51.91	4.30	56.21	74.00	-17.79	peak	
2	*	11020.00	40.74	4.30	45.04	54.00	-8.96	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5550MHz


Vertical

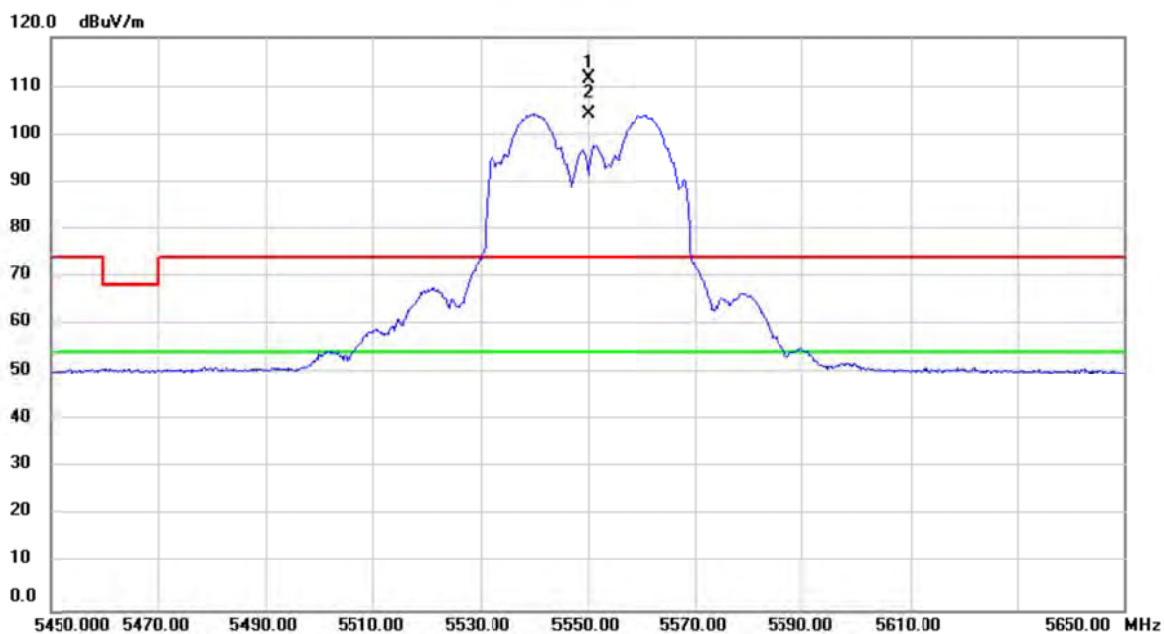

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5550.000	72.40	39.02	111.42	74.00	37.42	peak	No Limit
2	*	5550.000	65.22	39.02	104.24	54.00	50.24	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5550MHz


Vertical

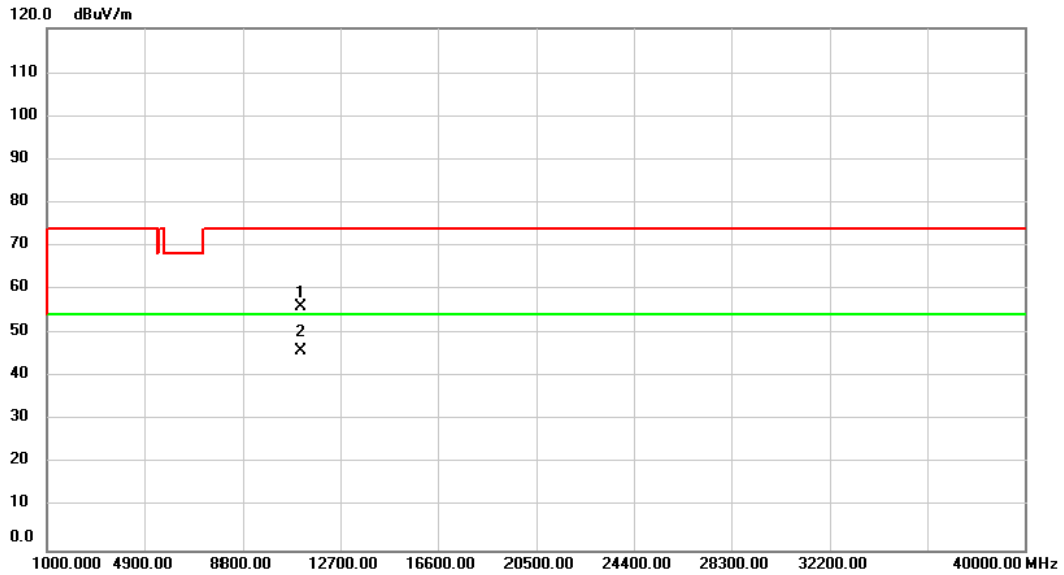

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11100.00	51.43	4.46	55.89	74.00	-18.11	peak	
2	*	11100.00	41.50	4.46	45.96	54.00	-8.04	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5550MHz


Horizontal

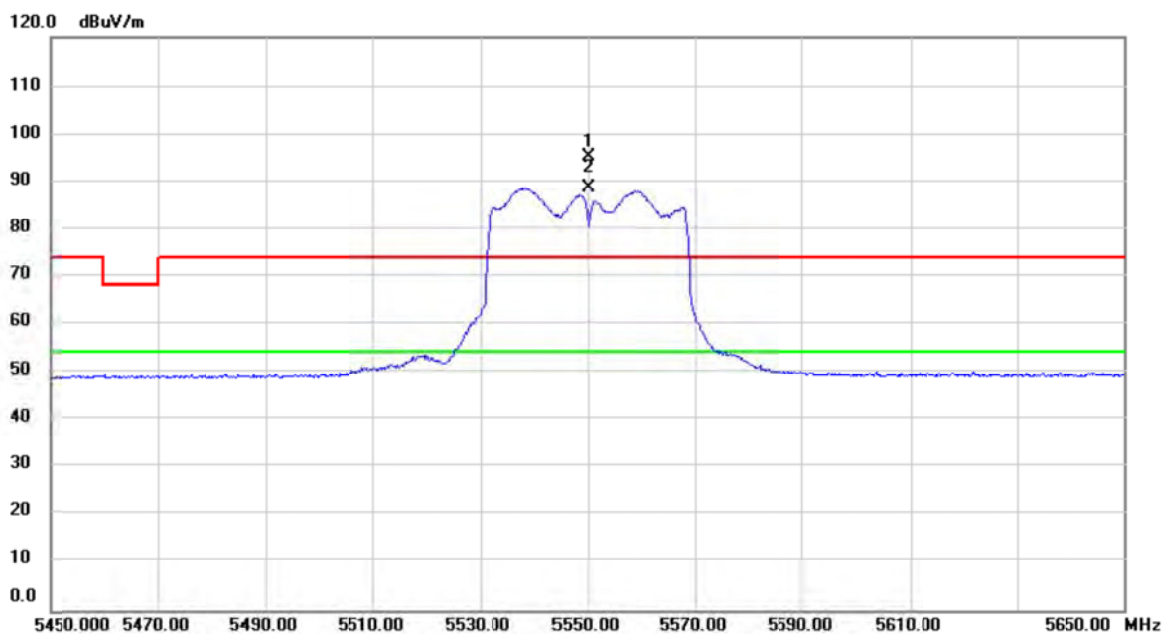

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5550.000	56.36	39.02	95.38	74.00	21.38	peak	No Limit
2	*	5550.000	49.56	39.02	88.58	54.00	34.58	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5550MHz


Horizontal

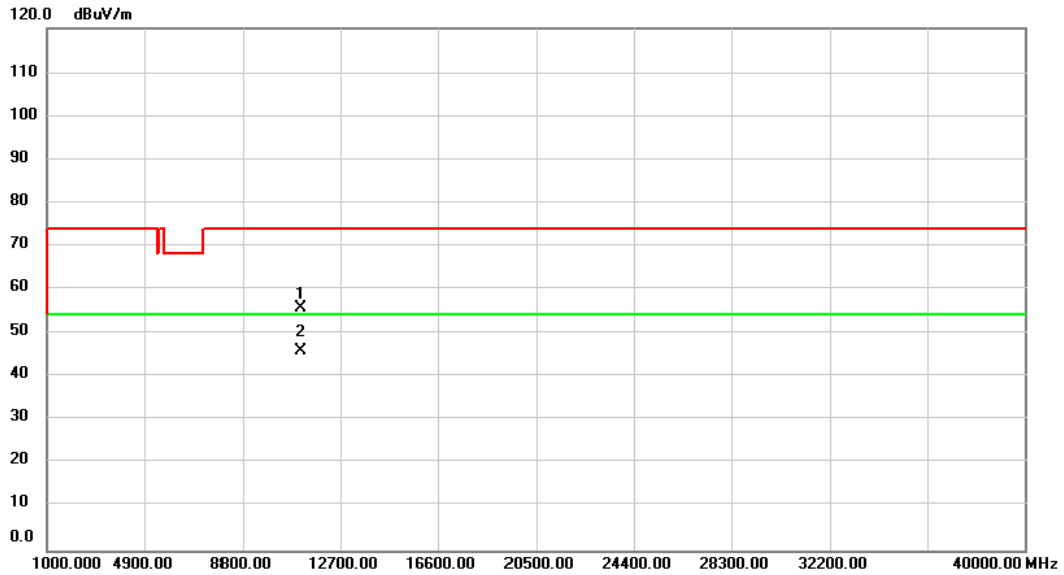

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11100.00	51.30	4.46	55.76	74.00	-18.24	peak	
2	*	11100.00	41.46	4.46	45.92	54.00	-8.08	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5670MHz


Vertical

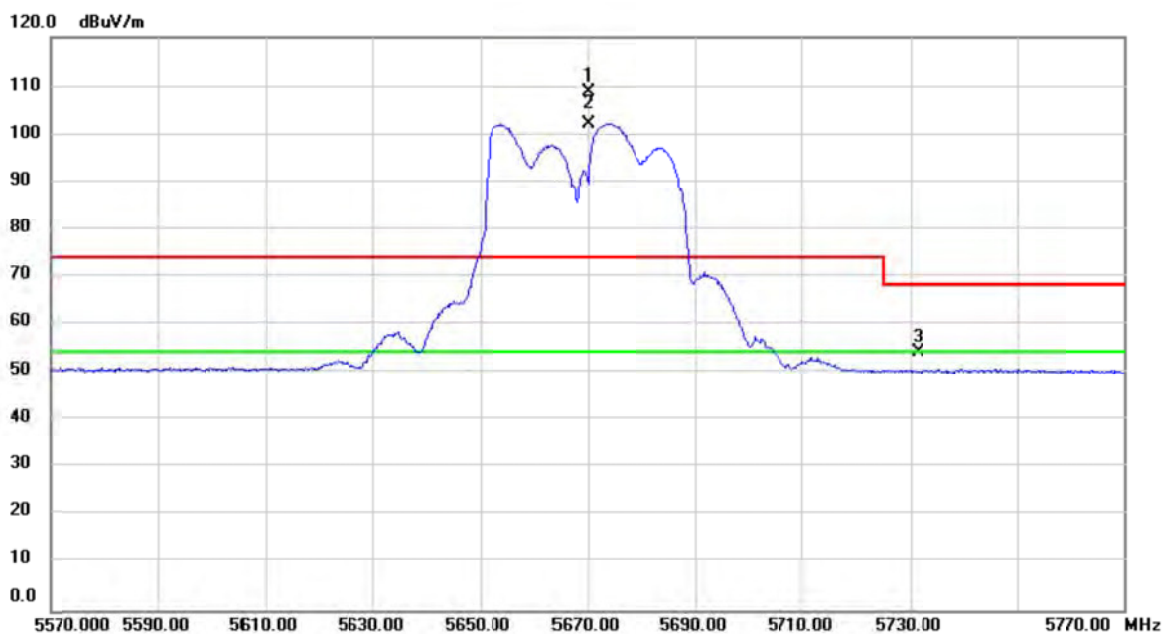

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5670.000	69.46	39.36	108.82	74.00	34.82	peak	No Limit
2	*	5670.000	62.80	39.36	102.16	54.00	48.16	AVG	No Limit
3		5731.400	14.64	39.54	54.18	68.20	-14.02	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5670MHz


Vertical

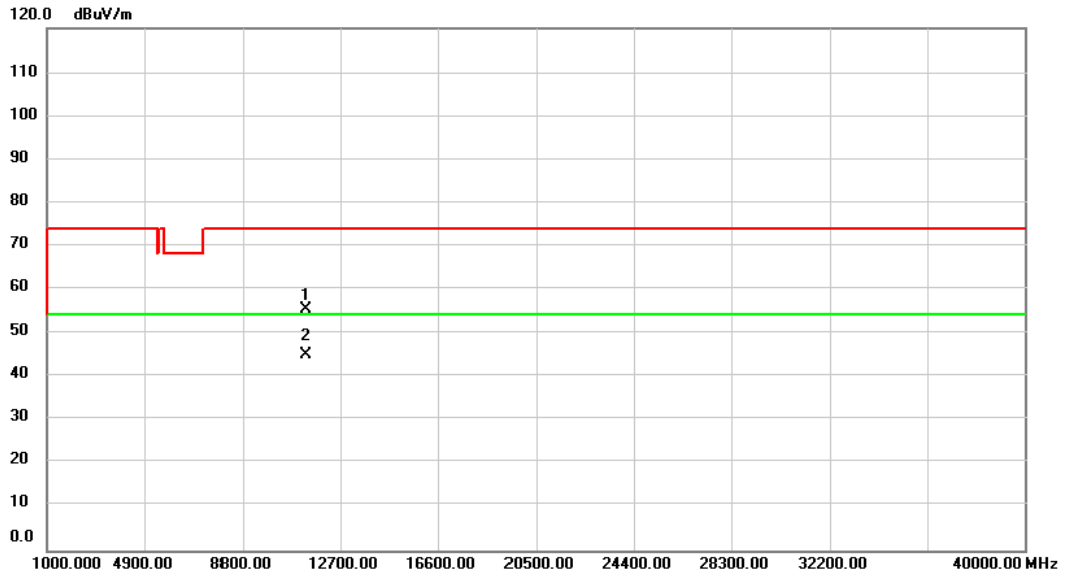

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11340.00	50.36	4.93	55.29	74.00	-18.71	peak	
2	*	11340.00	40.25	4.93	45.18	54.00	-8.82	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5670MHz


Horizontal

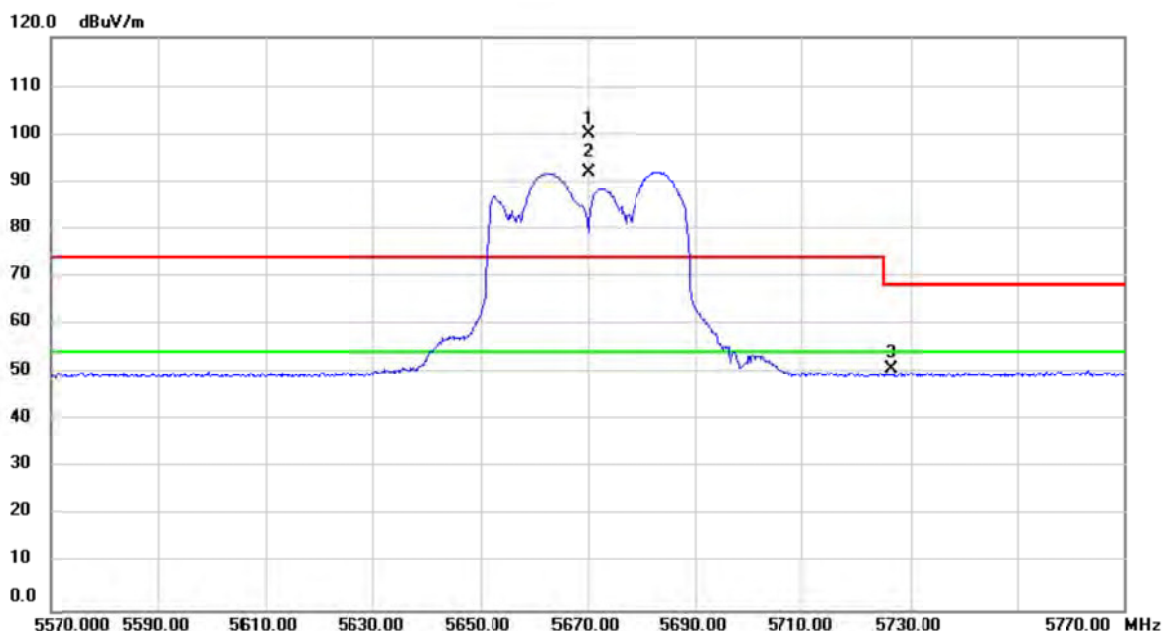

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5670.000	60.67	39.36	100.03	74.00	26.03	peak	No Limit
2	*	5670.000	52.67	39.36	92.03	54.00	38.03	AVG	No Limit
3		5726.485	11.27	39.53	50.80	68.20	-17.40	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5670MHz


Horizontal

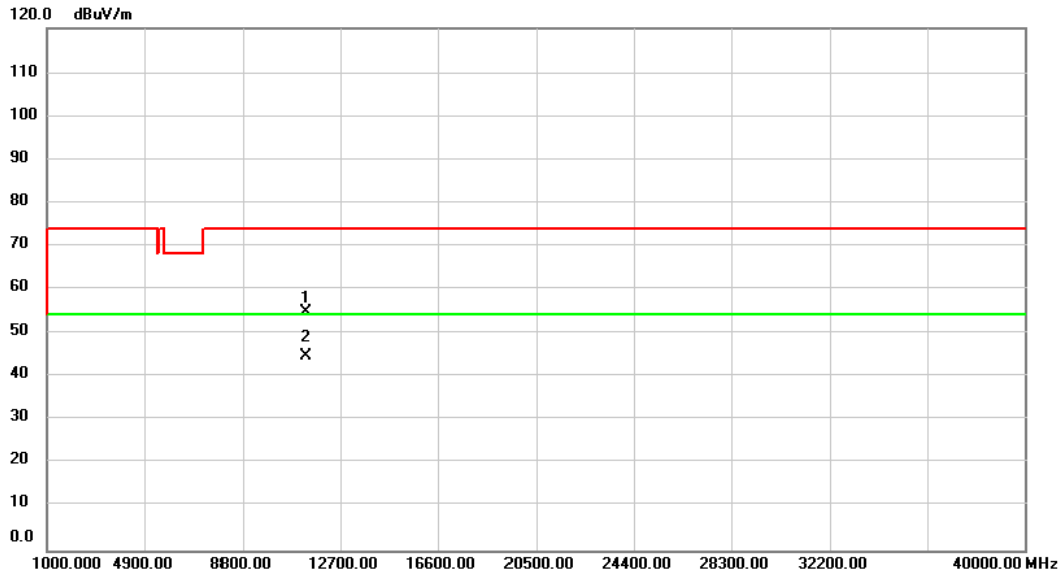

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11340.00	49.80	4.93	54.73	74.00	-19.27	peak	
2	*	11340.00	40.06	4.93	44.99	54.00	-9.01	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5530MHz


Vertical

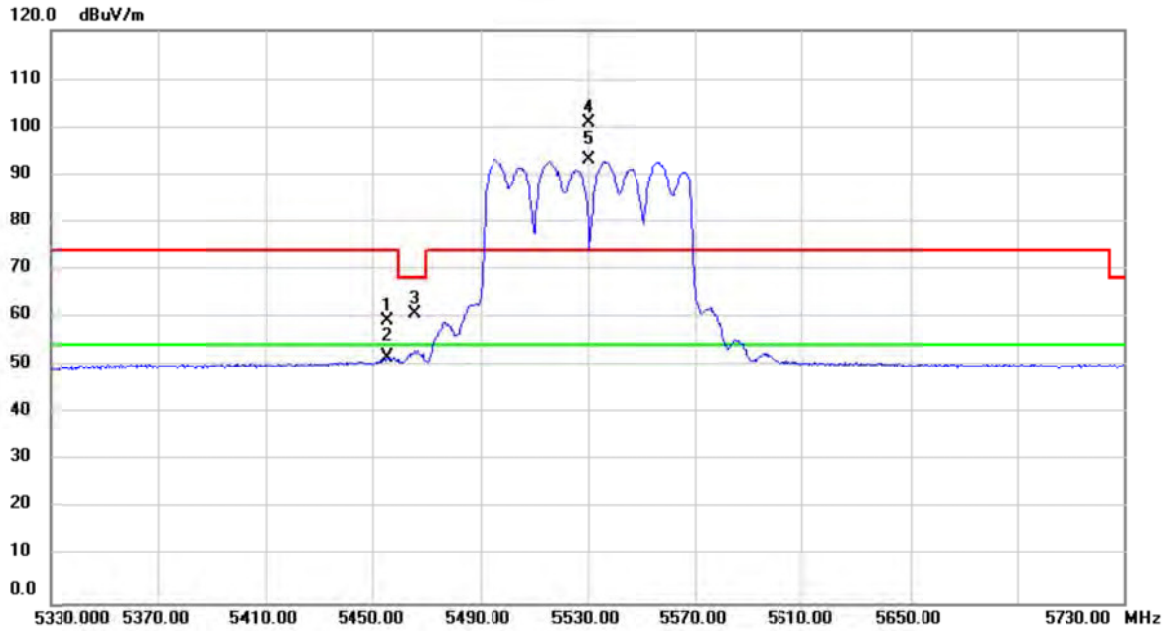

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detedor	Comment
1		5455.600	20.55	38.81	59.36	74.00	-14.64	peak	
2		5455.600	13.03	38.81	51.84	54.00	-2.16	AVG	
3		5465.940	21.96	38.83	60.79	68.20	-7.41	peak	
4	X	5530.000	61.87	38.95	100.82	74.00	26.82	peak	No Limit
5	*	5530.000	54.12	38.95	93.07	54.00	39.07	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5530MHz


Vertical

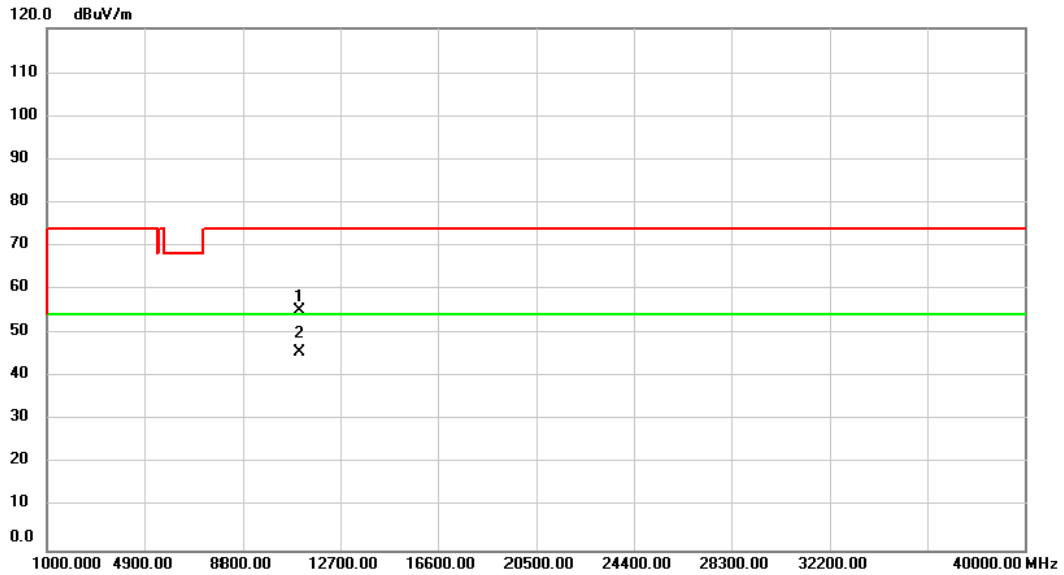

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11060.00	50.78	4.38	55.16	74.00	-18.84	peak	
2	*	11060.00	41.49	4.38	45.87	54.00	-8.13	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5530MHz


Horizontal

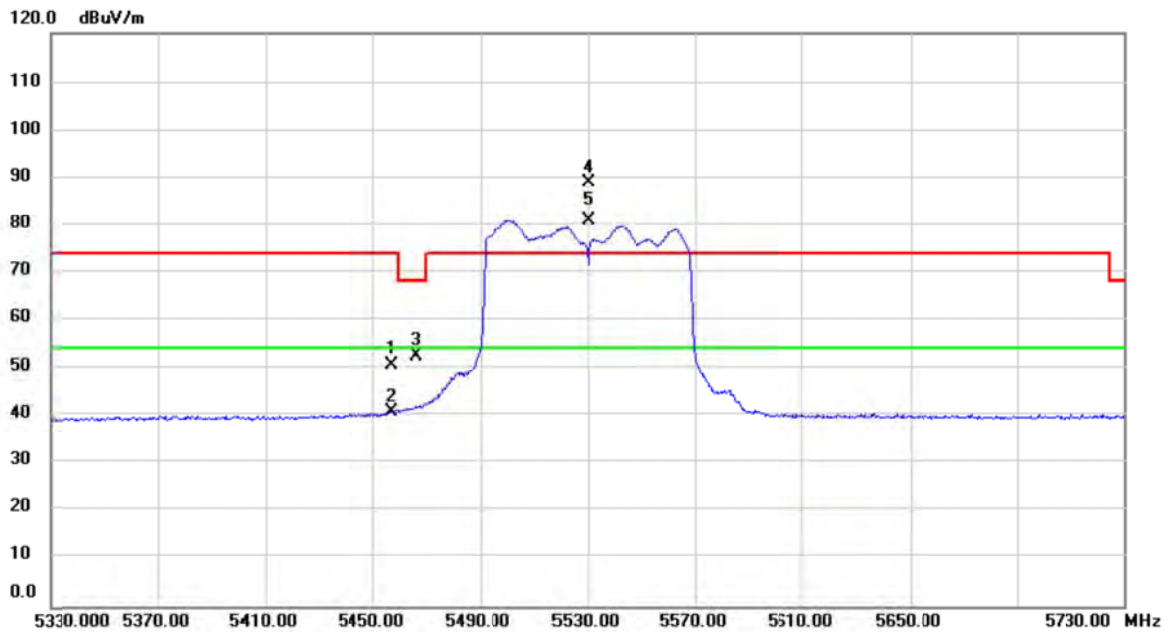

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5457.200	12.04	38.82	50.86	74.00	-23.14	peak	
2		5457.200	2.13	38.82	40.95	74.00	-33.05	peak	
3		5466.080	13.96	38.83	52.79	68.20	-15.41	peak	
4	X	5530.000	50.00	38.95	88.95	74.00	14.95	peak	No Limit
5	*	5530.000	42.01	38.95	80.96	54.00	26.96	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5530MHz


Horizontal

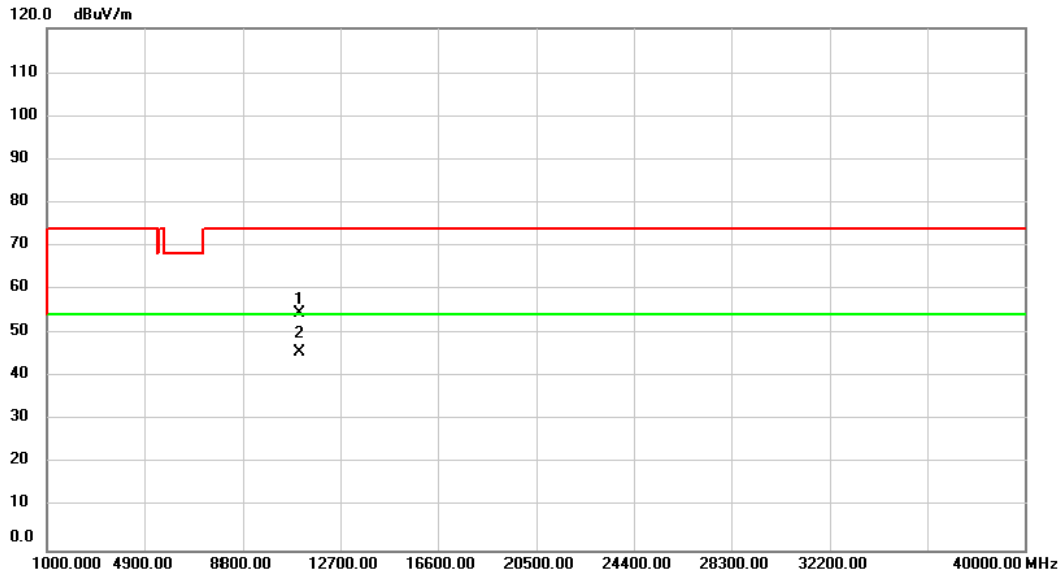

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11060.00	50.12	4.38	54.50	74.00	-19.50	peak	
2	*	11060.00	41.36	4.38	45.74	54.00	-8.26	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5610MHz


Vertical

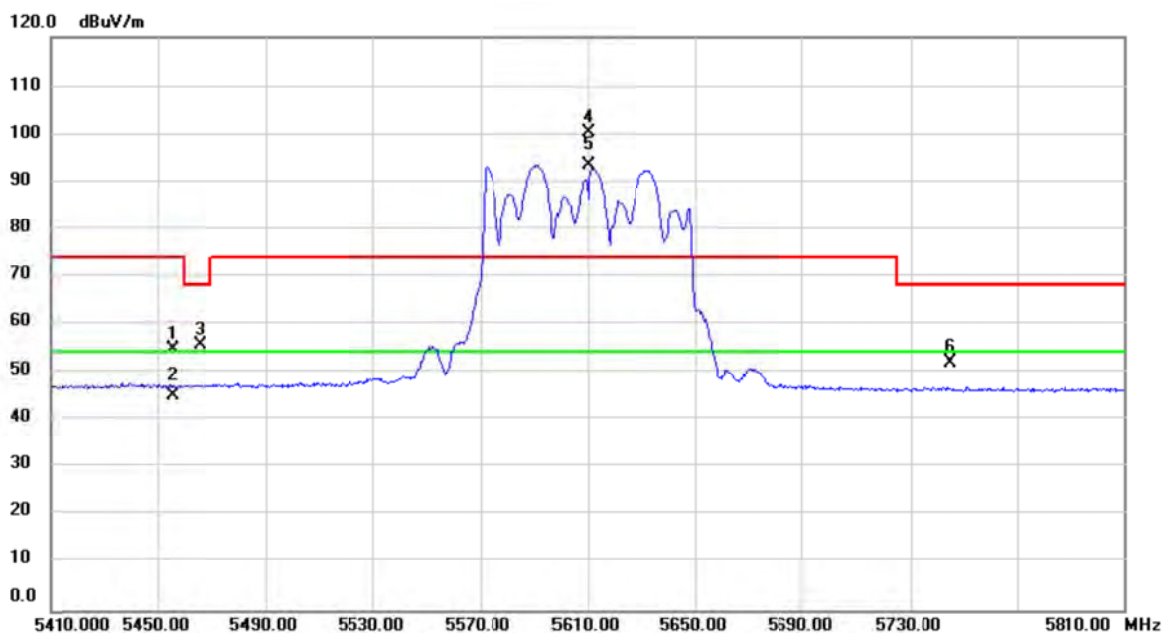

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5455.650	16.09	38.81	54.90	74.00	-19.10	peak	
2		5455.650	6.36	38.81	45.17	54.00	-8.83	AVG	
3		5465.560	16.90	38.83	55.73	68.20	-12.47	peak	
4	X	5610.000	61.13	39.18	100.31	74.00	26.31	peak	No Limit
5	*	5610.000	54.34	39.18	93.52	54.00	39.52	AVG	No Limit
6		5745.315	12.61	39.58	52.19	68.20	-16.01	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5610MHz


Vertical

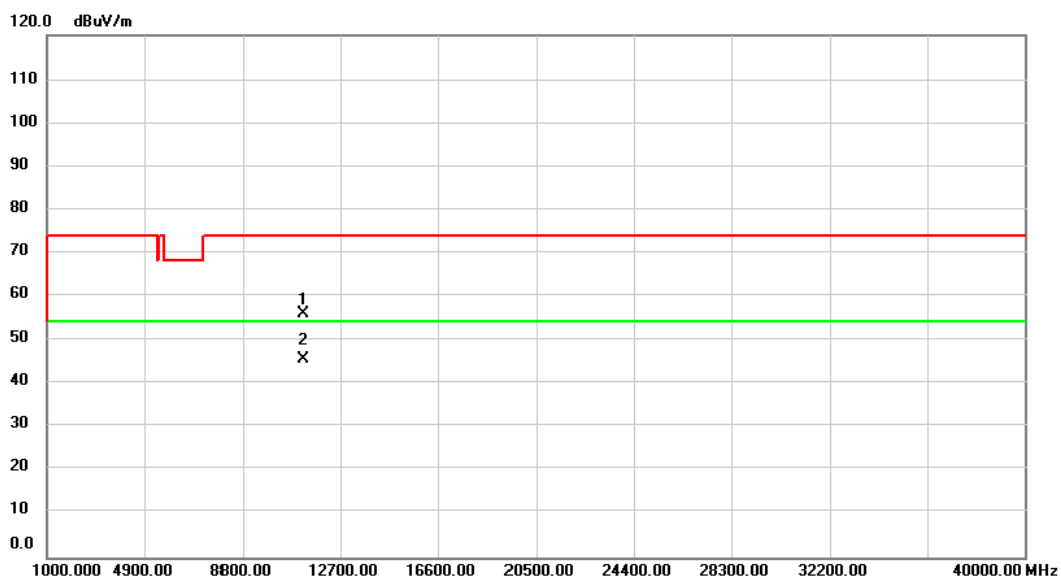

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11220.00	51.22	4.69	55.91	74.00	-18.09	peak	
2	*	11220.00	40.96	4.69	45.65	54.00	-8.35	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5610MHz


Horizontal

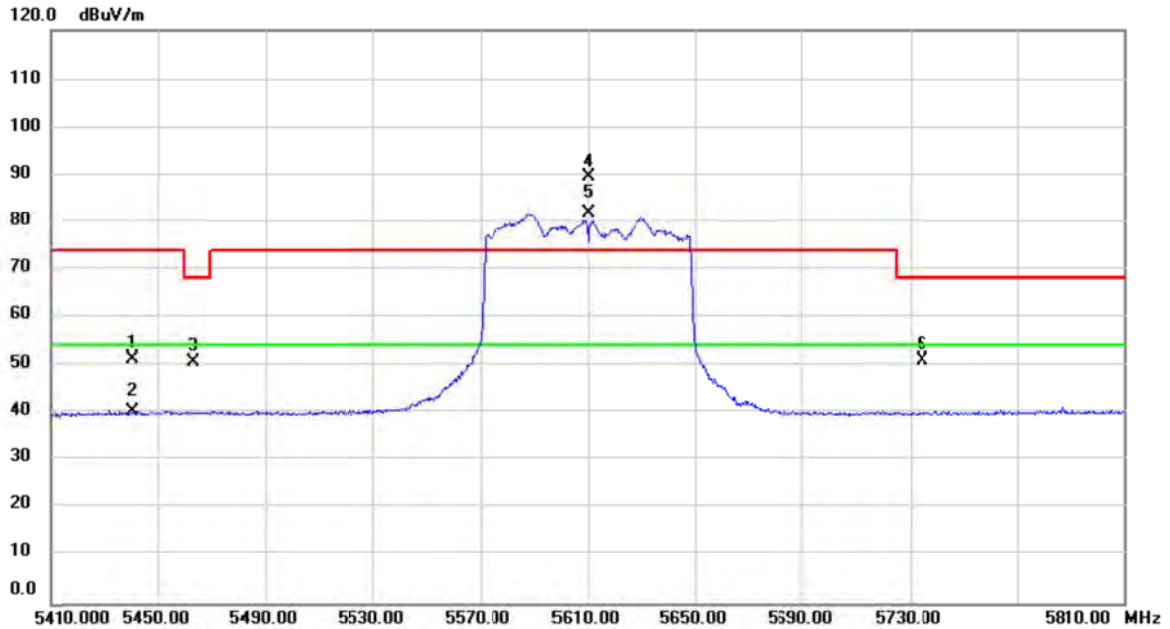

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5440.700	12.64	38.80	51.44	74.00	-22.56	peak	
2		5440.700	1.40	38.80	40.20	54.00	-13.80	AVG	
3		5463.020	12.14	38.83	50.97	68.20	-17.23	peak	
4	X	5610.000	50.43	39.18	89.61	74.00	15.61	peak	No Limit
5	*	5610.000	42.43	39.18	81.61	54.00	27.61	AVG	No Limit
6		5734.520	11.48	39.55	51.03	68.20	-17.17	peak	


Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5610MHz

Horizontal

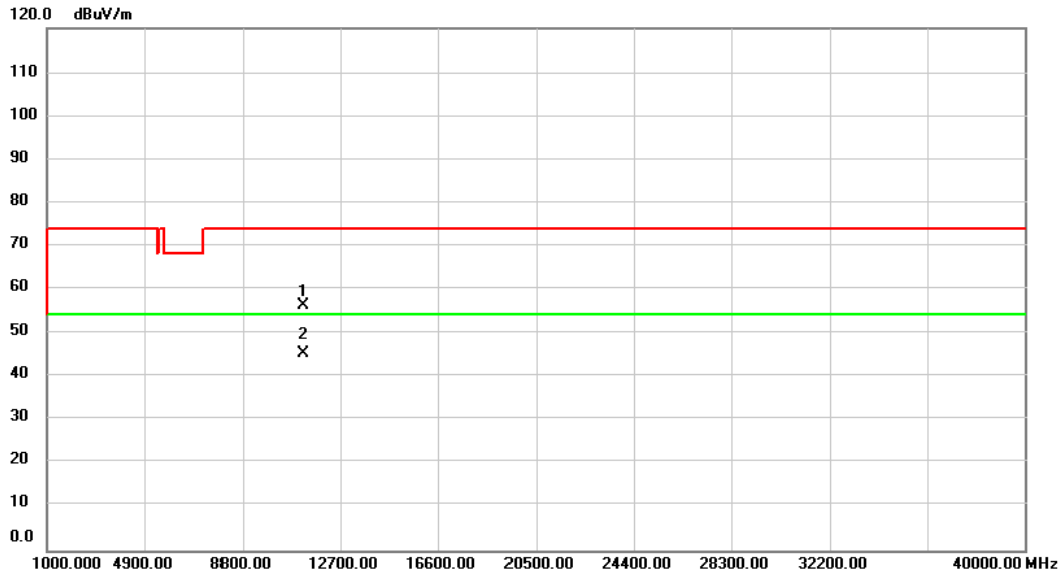

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11220.00	51.54	4.69	56.23	74.00	-17.77	peak	
2	*	11220.00	40.73	4.69	45.42	54.00	-8.58	AVG	

TX A Mode_DUTY CYCLE

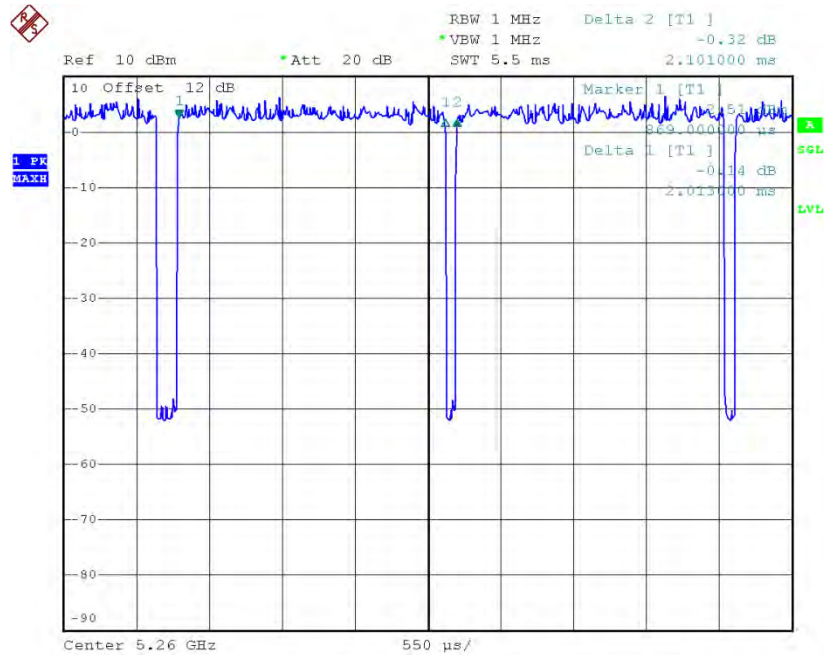

Date: 29.APR.2016 13:56:38

Duty cycle: TX 5260 MHz

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$

T_{ON} : 2.013 msec

T_{Total} : 2.101 msec

Duty cycle: 95.81 %

$$\text{Duty Factor} = 10 \log(1/\text{Duty cycle})$$


Duty Factor = 0.19

Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is less than 98 %, so, the output power and power density should be calculated as

$$\text{Output Power} = \text{Measured power} + \text{Duty factor}$$

$$\text{Power Spectral Density} = \text{Measured density} + \text{Duty factor}$$

TX N20 Mode_DUTY CYCLE

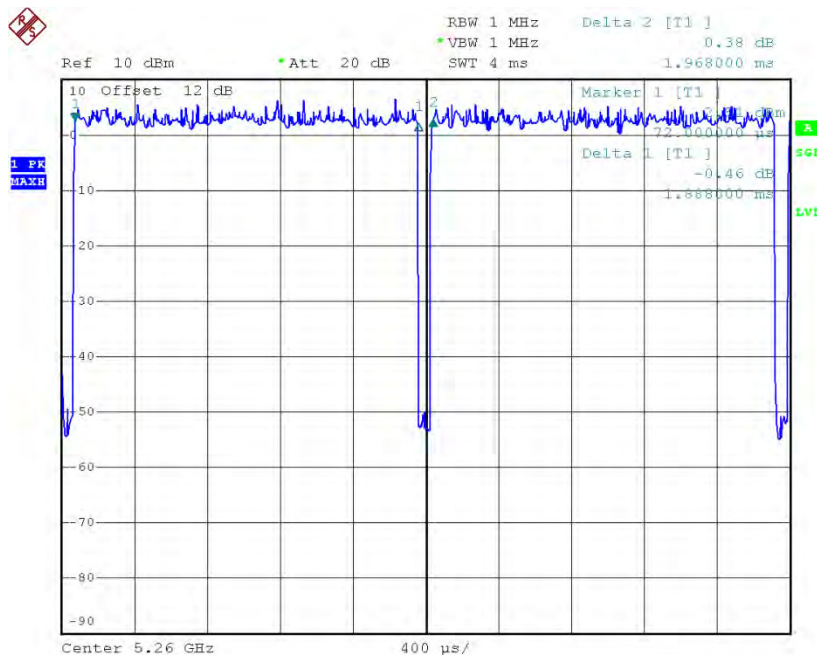

Date: 29.APR.2016 13:58:20

Duty cycle: TX 5260 MHz

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$

T_{ON} : 1.888 msec

T_{Total} : 1.968 msec

Duty cycle: 95.93 %

$$\text{Duty Factor} = 10 \log(1/\text{Duty cycle})$$


Duty Factor = 0.18

Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is less than 98 %, so, the output power and power density should be calculated as

$$\text{Output Power} = \text{Measured power} + \text{Duty factor}$$

$$\text{Power Spectral Density} = \text{Measured density} + \text{Duty factor}$$

TX N40 Mode_DUTY CYCLE

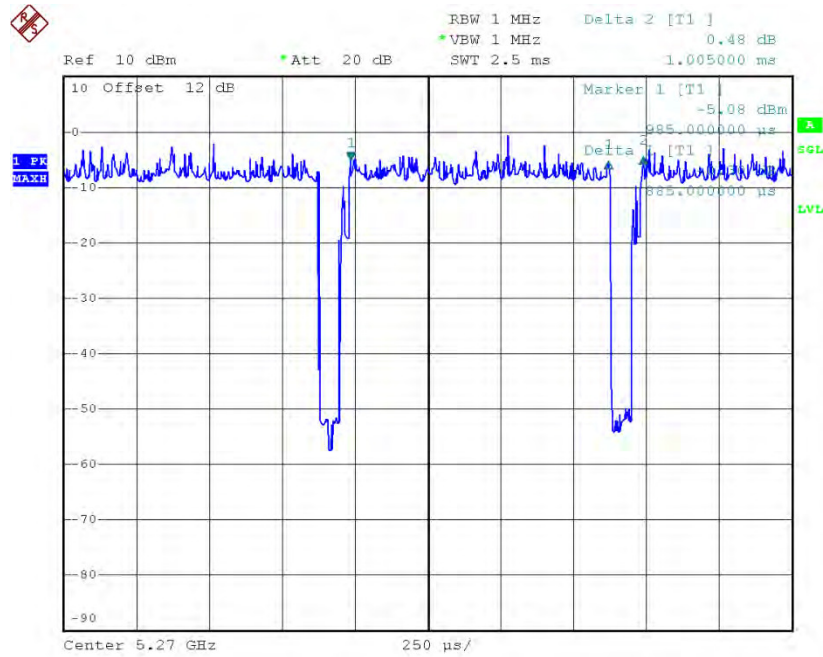

Date: 29.APR.2016 14:34:31

Duty cycle: TX 5270 MHz

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$

T_{ON} : 0.885 msec

T_{Total} : 1.005 msec

Duty cycle: 88.06 %

$$\text{Duty Factor} = 10 \log(1/\text{Duty cycle})$$


Duty Factor = 0.55

Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is less than 98 %, so, the output power and power density should be calculated as

$$\text{Output Power} = \text{Measured power} + \text{Duty factor}$$

$$\text{Power Spectral Density} = \text{Measured density} + \text{Duty factor}$$

TX AC20 Mode_DUTY CYCLE

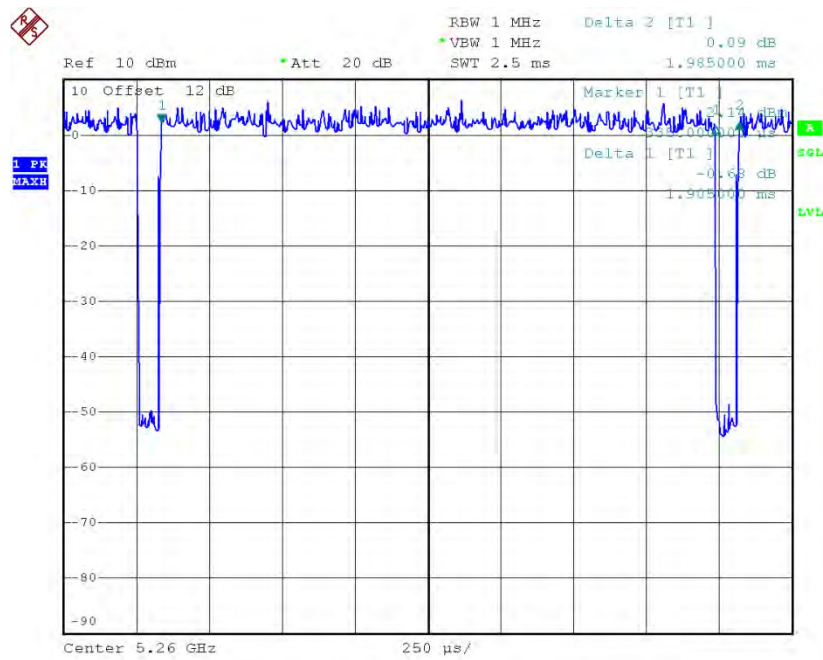

Date: 29.APR.2016 14:14:53

Duty cycle: TX 5260 MHz

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$

T_{ON} : 1.905 msec

T_{Total} : 1.985 msec

Duty cycle: 95.97 %

$$\text{Duty Factor} = 10 \log(1/\text{Duty cycle})$$


Duty Factor = 0.18

Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is less than 98 %, so, the output power and power density should be calculated as

$$\text{Output Power} = \text{Measured power} + \text{Duty factor}$$

$$\text{Power Spectral Density} = \text{Measured density} + \text{Duty factor}$$

TX AC40 Mode_DUTY CYCLE

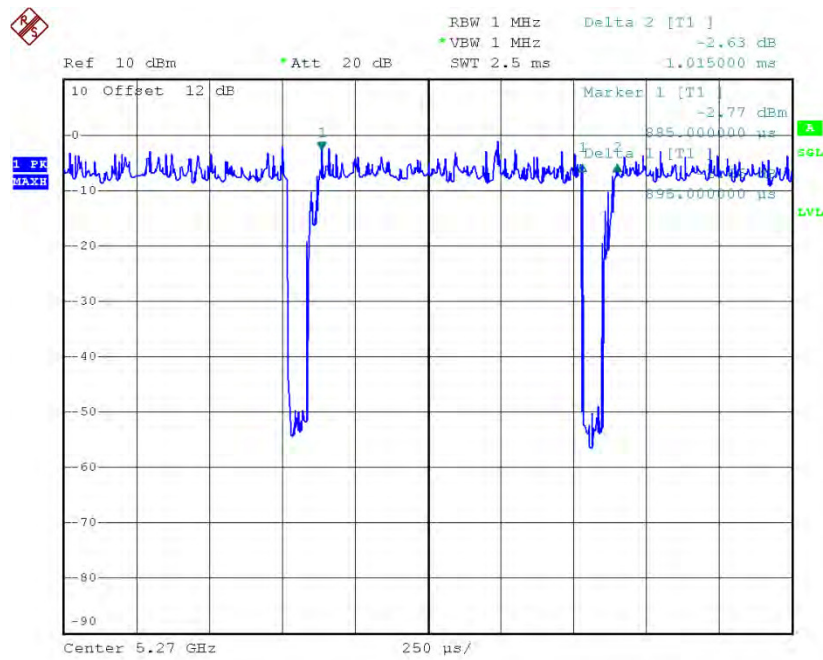

Date: 29.APR.2016 14:43:19

Duty cycle: TX 5270 MHz

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$

T_{ON} : 0.895 msec

T_{Total} : 1.015 msec

Duty cycle: 88.18 %

$$\text{Duty Factor} = 10 \log(1/\text{Duty cycle})$$


Duty Factor = 0.55

Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is less than 98 %, so, the output power and power density should be calculated as

$$\text{Output Power} = \text{Measured power} + \text{Duty factor}$$

$$\text{Power Spectral Density} = \text{Measured density} + \text{Duty factor}$$

TX AC80 Mode_DUTY CYCLE

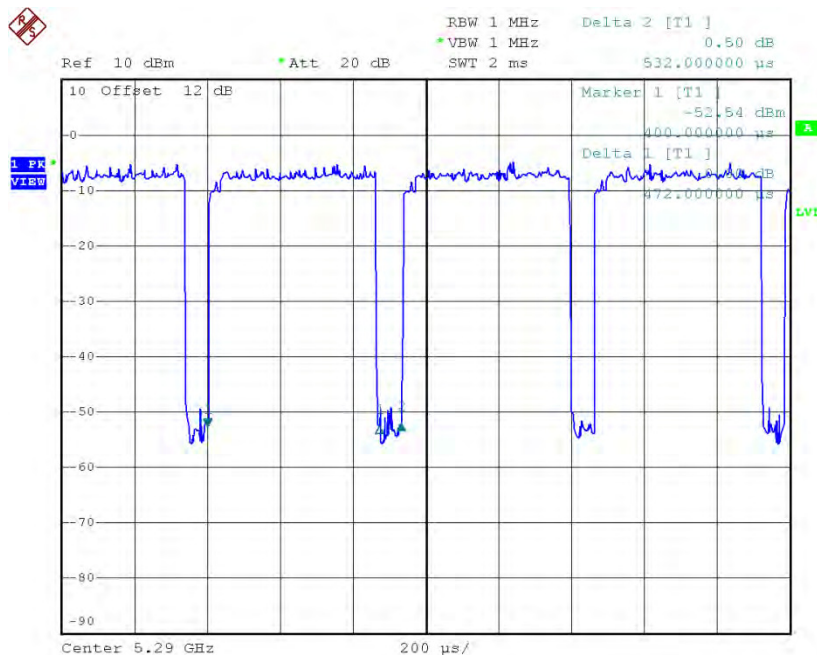

Date: 29.APR.2016 15:08:45

Duty cycle: TX 5290 MHz

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$

T_{ON} : 0.472 msec

T_{Total} : 0.532 msec

Duty cycle: 88.72 %

$$\text{Duty Factor} = 10 \log(1/\text{Duty cycle})$$

Duty Factor = 0.52


Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is less than 98 %, so, the output power and power density should be calculated as

$$\text{Output Power} = \text{Measured power} + \text{Duty factor}$$

$$\text{Power Spectral Density} = \text{Measured density} + \text{Duty factor}$$


ATTACHMENT E -BANDWIDTH

TX CH60

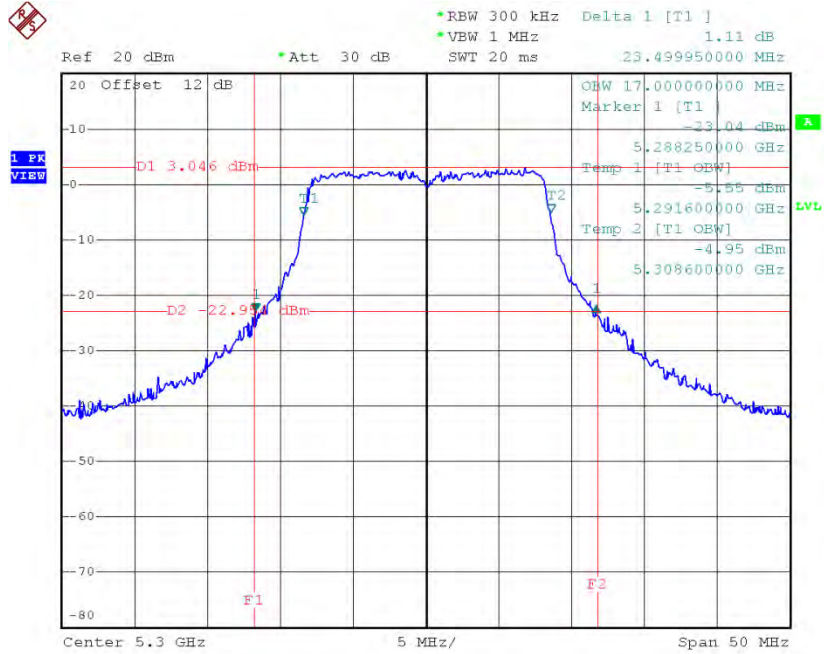

Date: 29.APR.2016 13:17:13

TX CH64

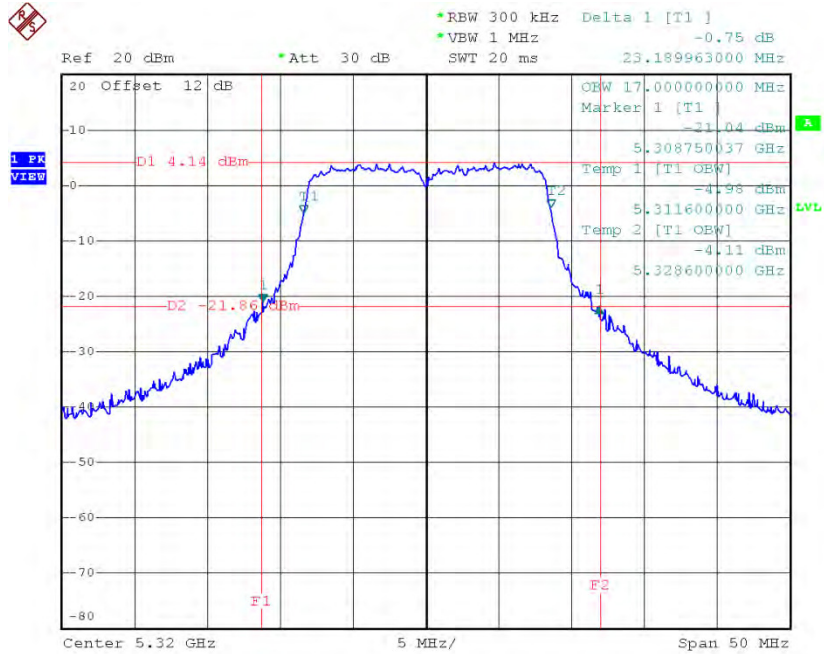


Date: 29.APR.2016 13:52:21

Test Mode: UNII-2A/TX N20 Mode_CH52/CH60/CH64


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH52	5260	24.10	18.10
CH60	5300	24.75	18.10
CH64	5320	24.00	18.20

TX CH52

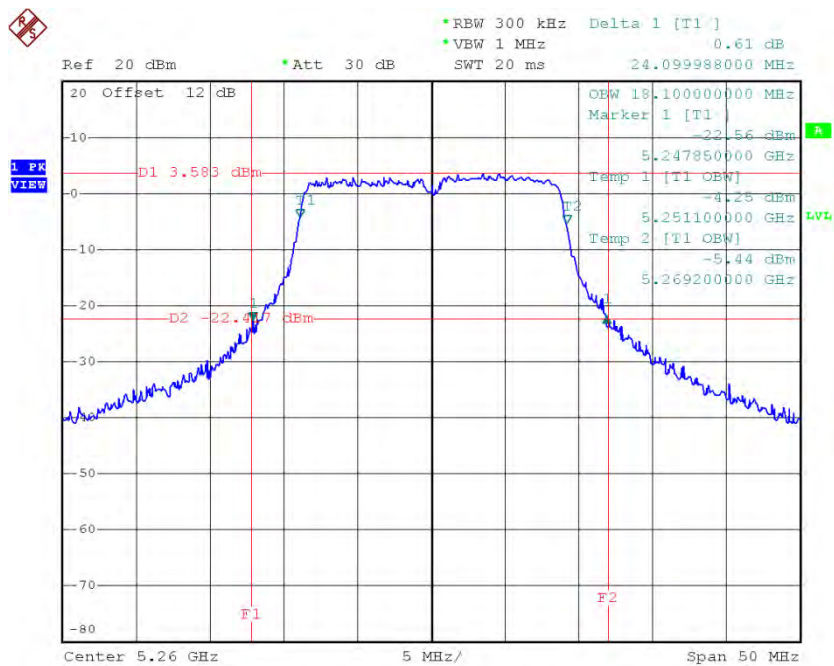


Date: 29.APR.2016 13:58:08

TX CH60

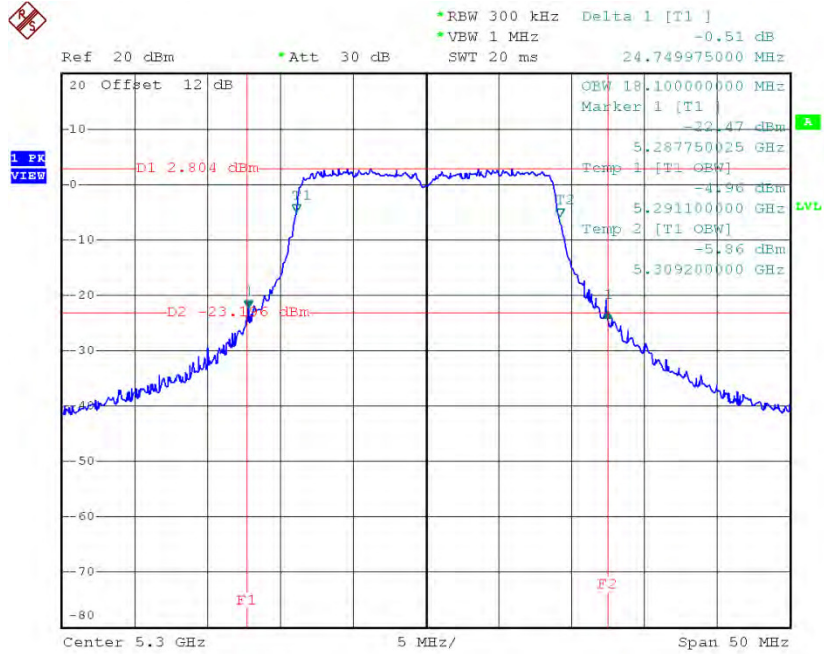

Date: 29.APR.2016 14:08:01

TX CH64

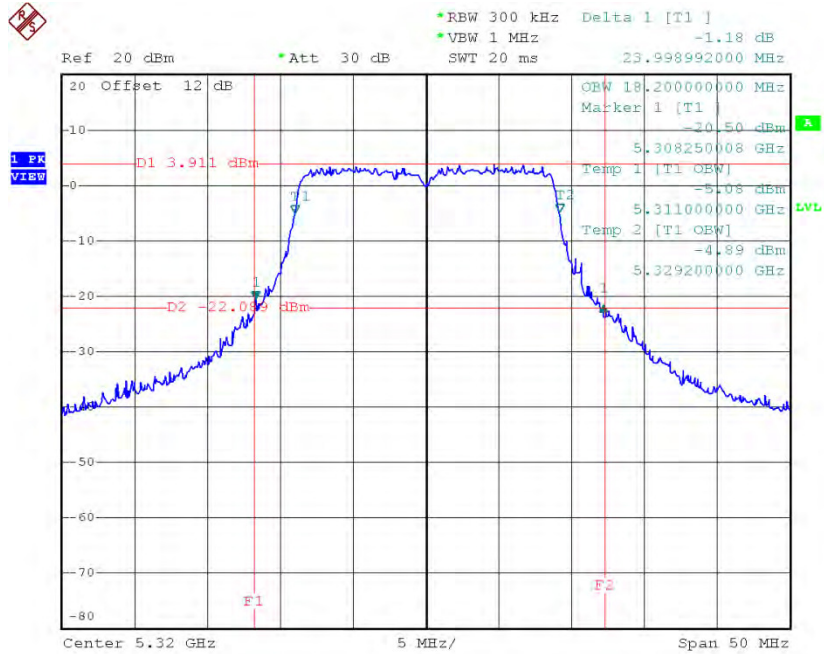


Date: 29.APR.2016 14:08:56

Test Mode: UNII-2A/TX N40 Mode_CH54/CH62


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH54	5270	44.70	36.40
CH62	5310	44.99	36.40

TX CH54

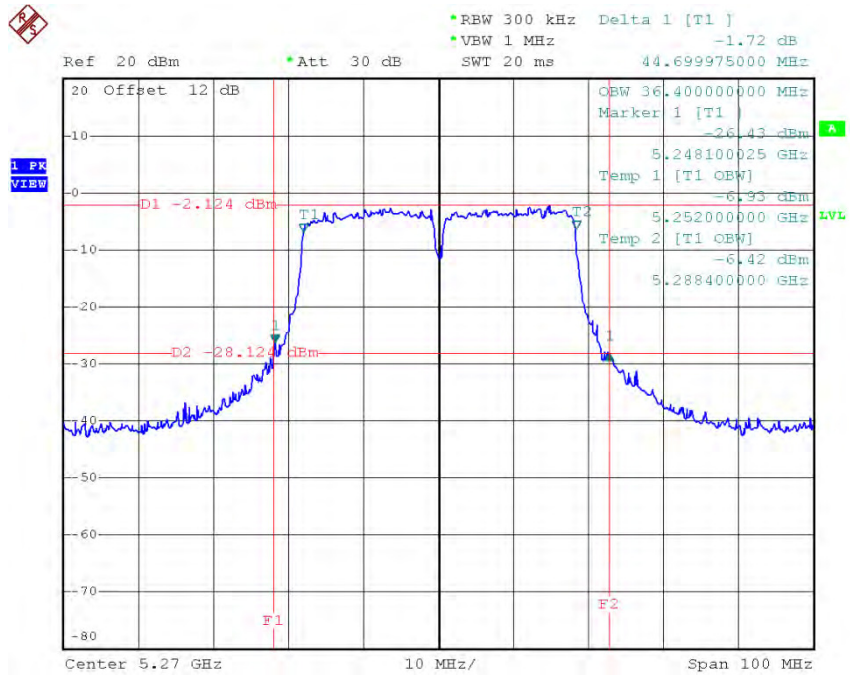

Date: 29.APR.2016 14:34:13

TX CH62

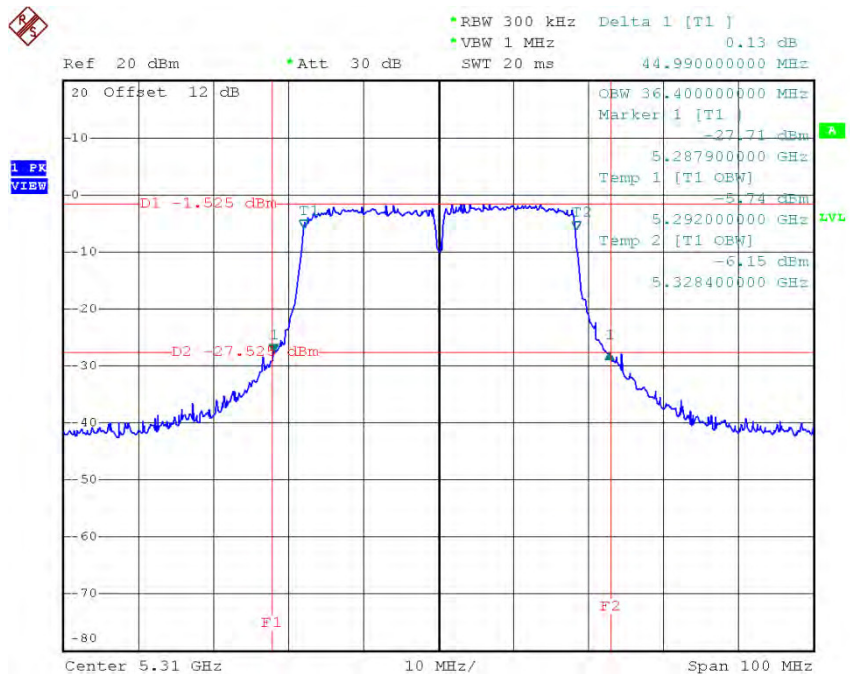


Date: 29.APR.2016 14:35:30

Test Mode: UNII-2C/TX A Mode_CH100/CH116/CH140


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH100	5500	23.59	17.00
CH116	5580	22.59	17.00
CH140	5700	22.99	17.10

TX CH100

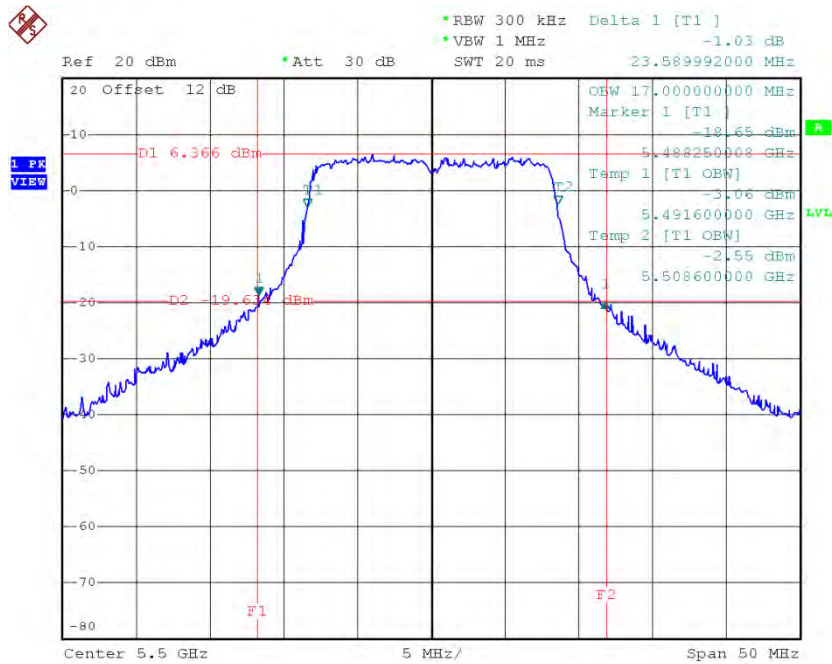


Date: 29.APR.2016 13:31:24

TX CH116

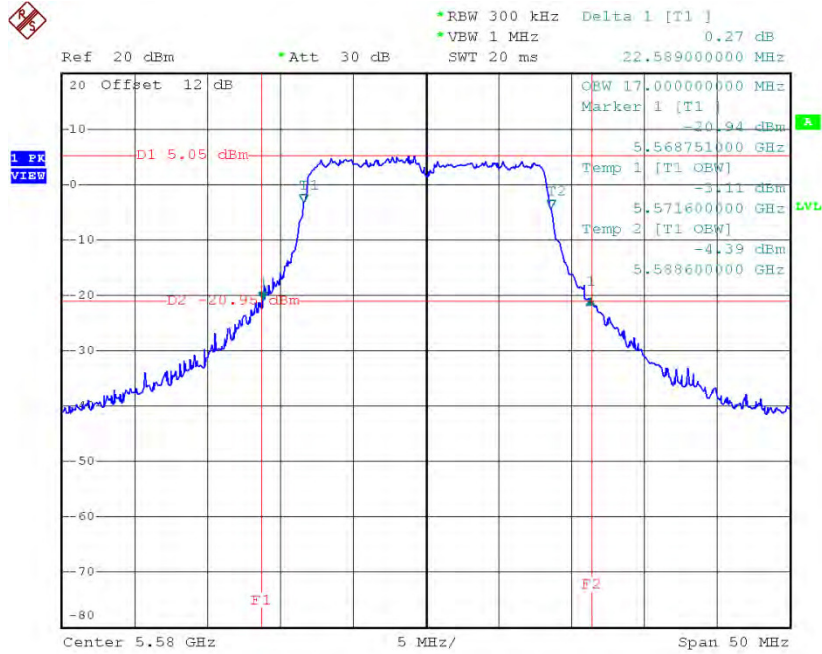

Date: 29.APR.2016 13:45:00

TX CH140

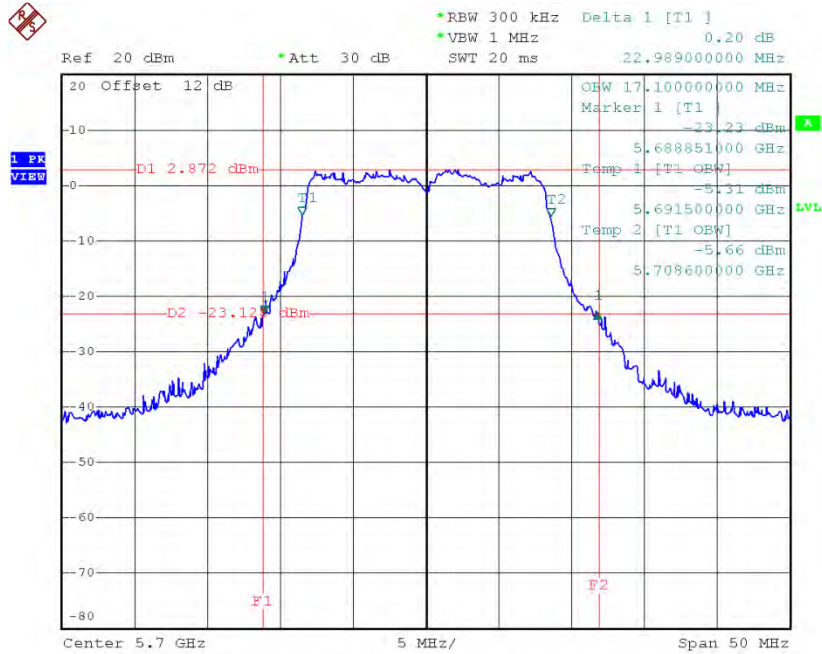


Date: 29.APR.2016 13:50:41

Test Mode: UNII-2C/TX N20 Mode_CH100/CH116/CH140


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH100	5500	24.09	18.10
CH116	5580	23.70	17.90
CH140	5700	23.85	18.00

TX CH100

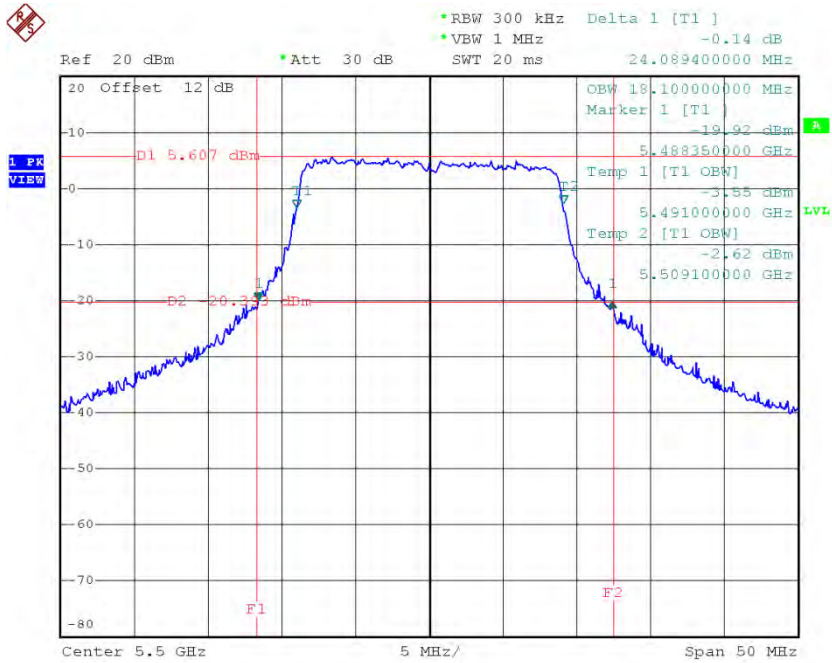


Date: 29.APR.2016 15:12:04

TX CH116

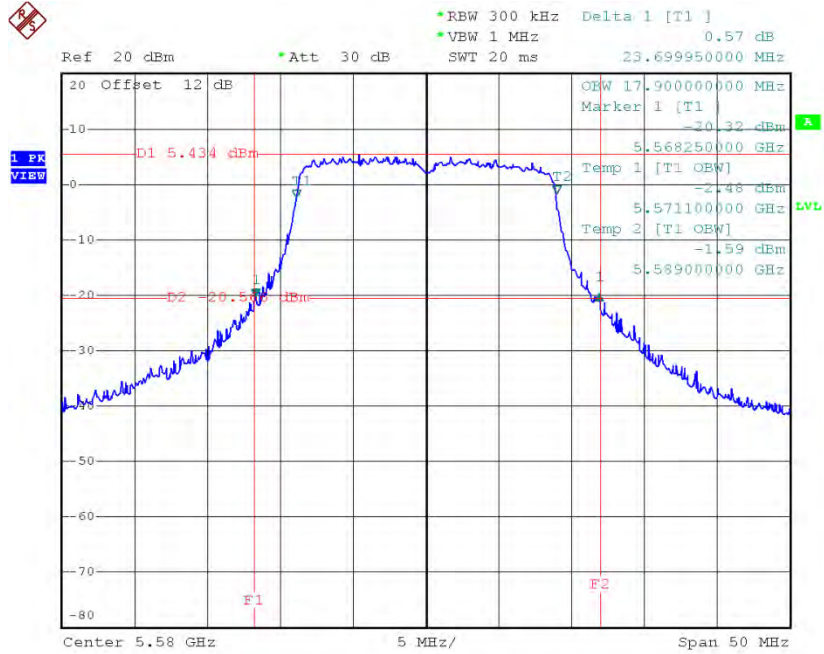

Date: 29.APR.2016 15:21:54

TX CH140

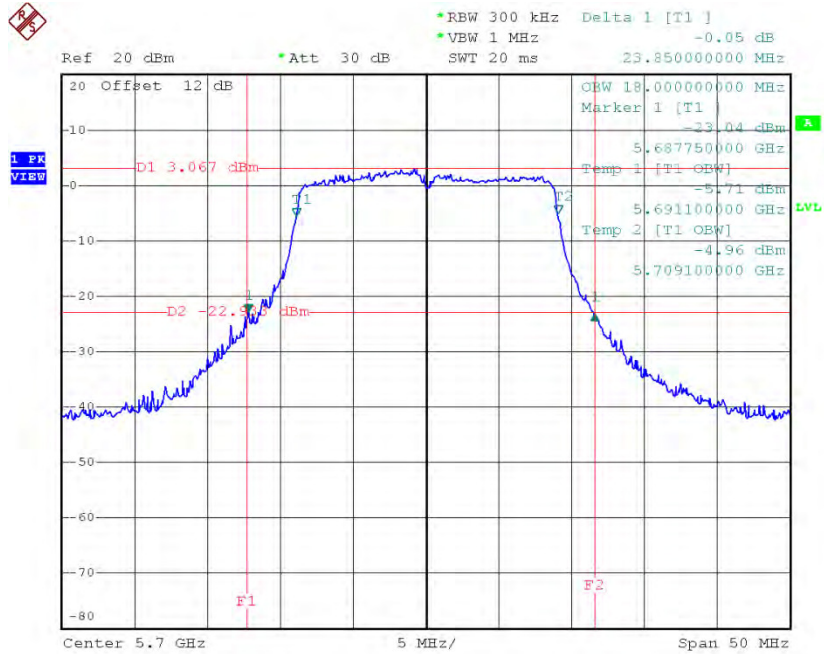


Date: 29.APR.2016 15:22:45

Test Mode: UNII-2C/TX N40 Mode_CH102/CH110/CH134


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH102	5510	44.00	36.20
CH110	5550	44.80	36.60
CH134	5670	45.00	36.40

TX CH102

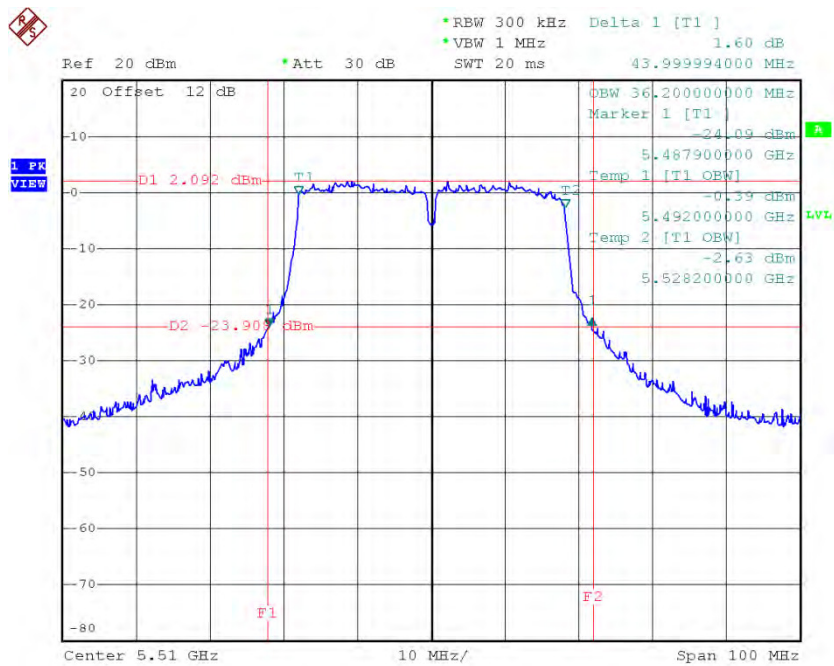


Date: 29.APR.2016 15:57:49

TX CH110

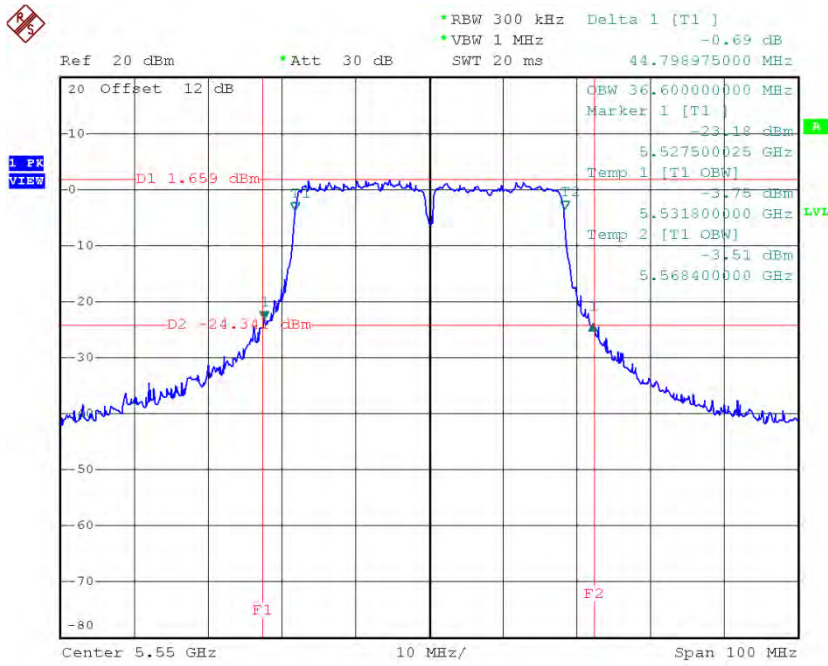

Date: 29.APR.2016 16:07:29

TX CH134

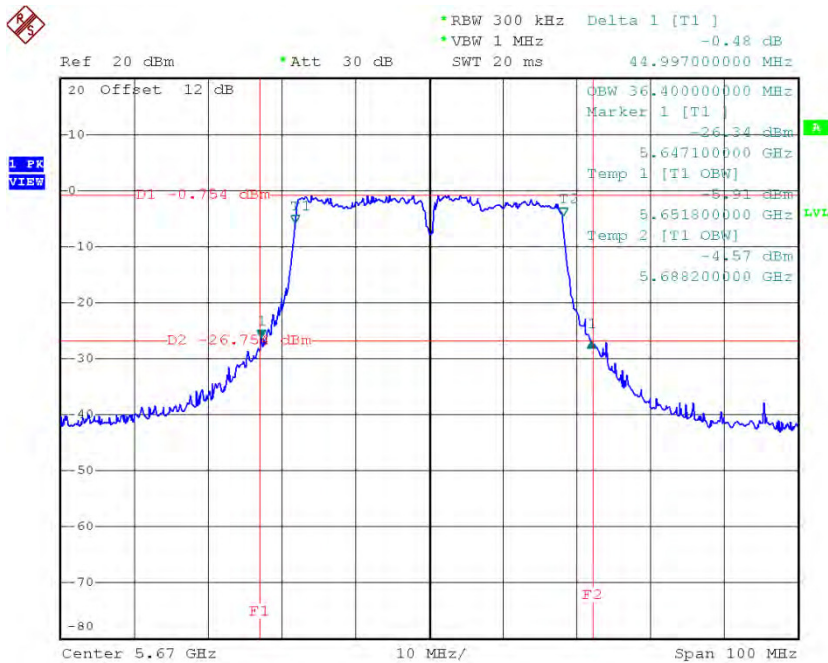


Date: 29.APR.2016 16:11:55

Test Mode: UNII-2A/TX AC20 Mode_CH52/CH60/CH64


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH52	5260	23.89	18.10
CH60	5300	24.65	18.10
CH64	5320	24.30	18.10

TX CH52

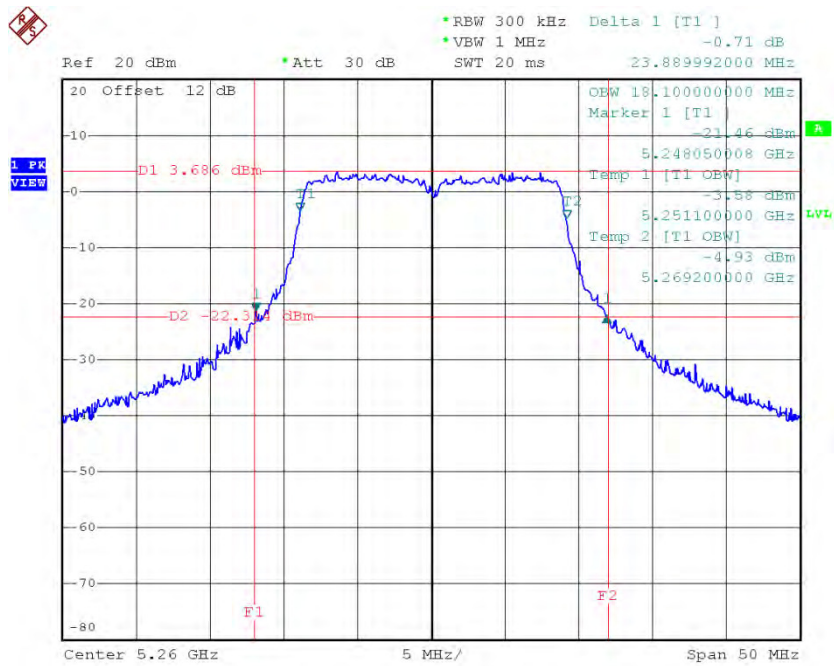


Date: 29.APR.2016 14:14:19

TX CH60

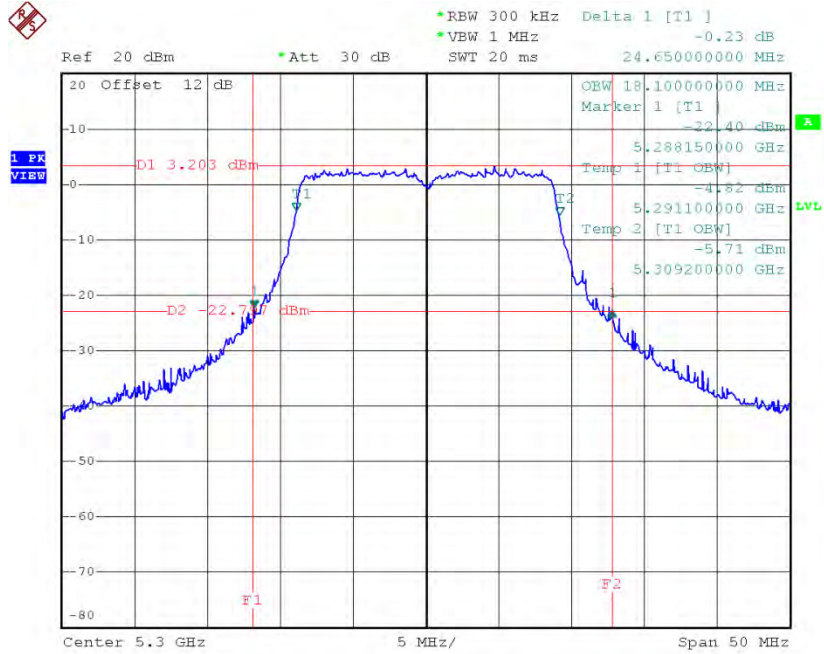

Date: 29.APR.2016 14:16:32

TX CH64

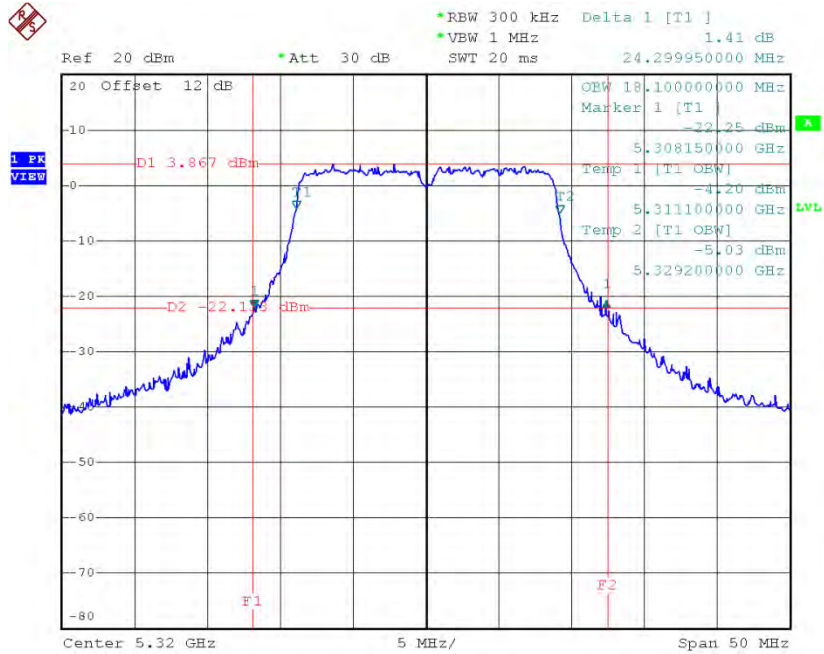


Date: 29.APR.2016 14:17:27

Test Mode: UNII-2A/TX AC40 Mode_CH54/CH62


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH54	5270	45.30	36.60
CH62	5310	44.59	36.40

TX CH54

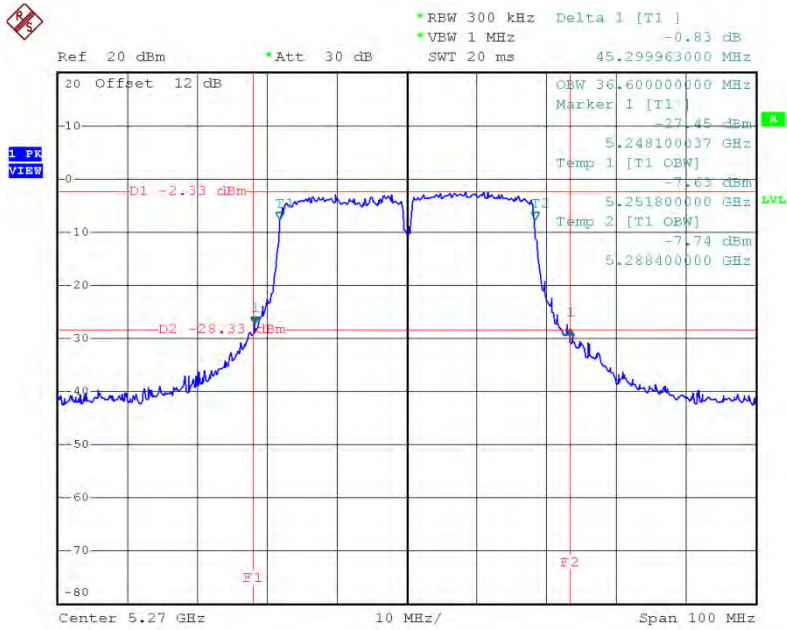

Date: 29.APR.2016 14:43:01

TX CH62

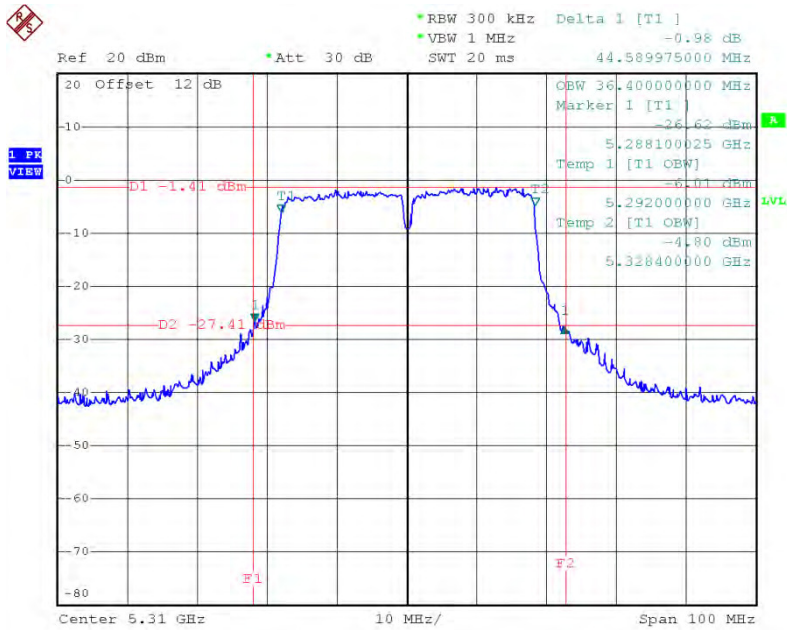


Date: 29.APR.2016 14:44:10

Test Mode: UNII-2A/TX AC80 Mode_CH58

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH58	5290	85.00	76.00

TX CH58

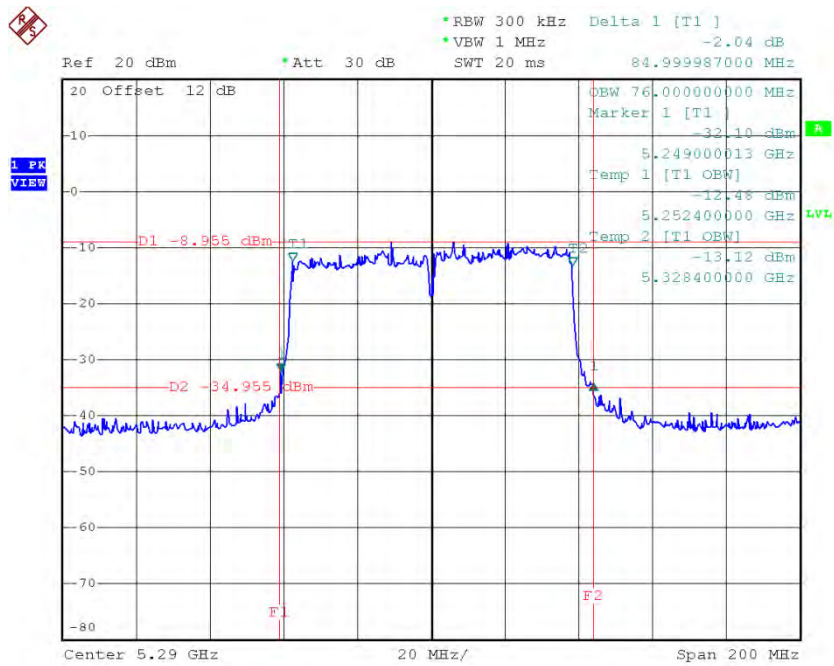


Date: 29.APR.2016 14:55:53

Test Mode: UNII-2C/TX AC20 Mode_CH100/CH116/CH140


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH100	5500	25.10	18.10
CH116	5580	23.65	18.00
CH140	5700	23.79	18.20

TX CH100

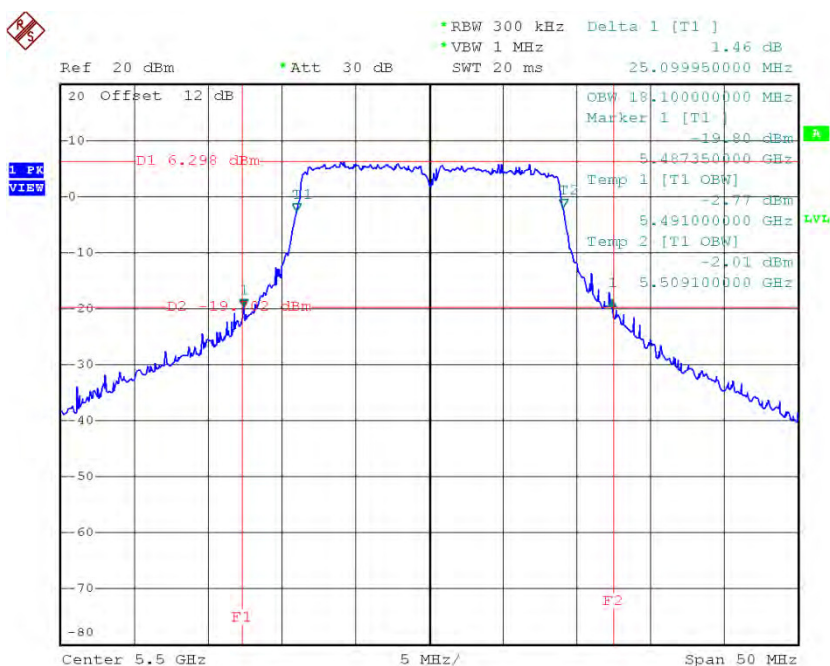


Date: 29.APR.2016 15:40:59

TX CH116

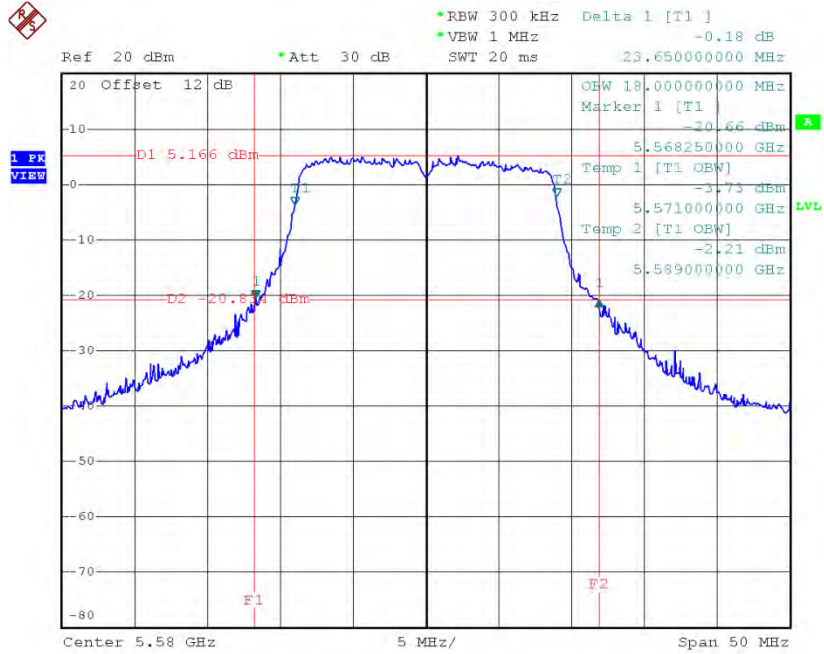


Date: 29.APR.2016 15:42:11

TX CH140

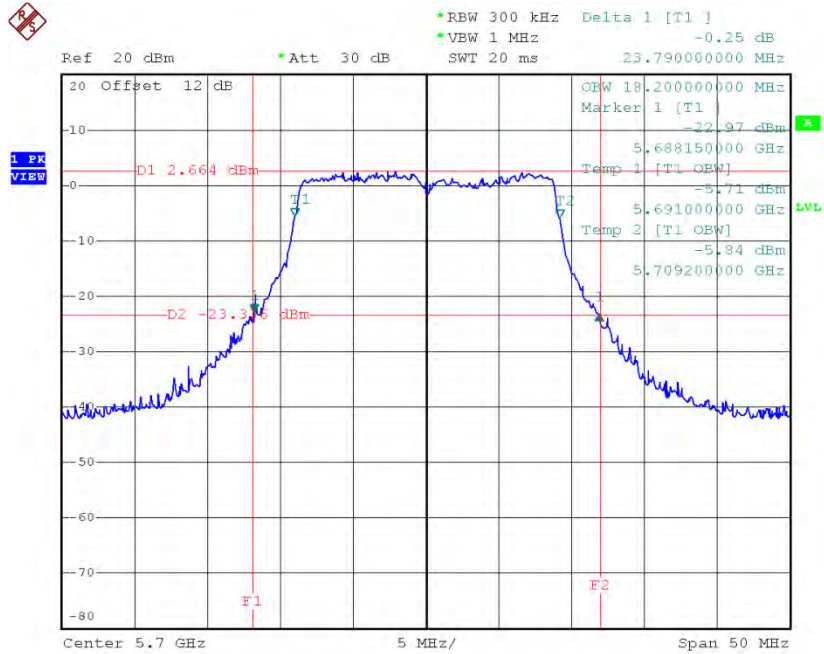


Date: 29.APR.2016 15:47:08

TX CH110

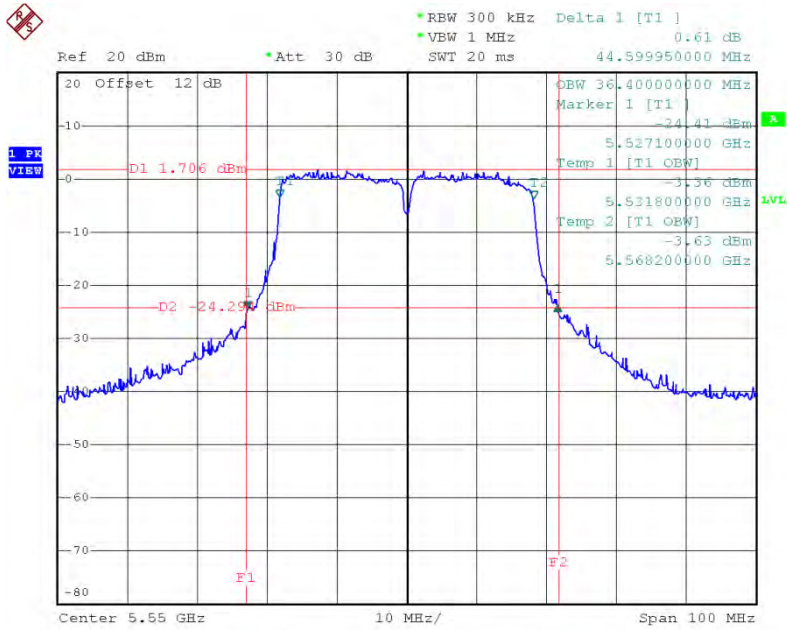

Date: 29.APR.2016 16:30:19

TX CH134

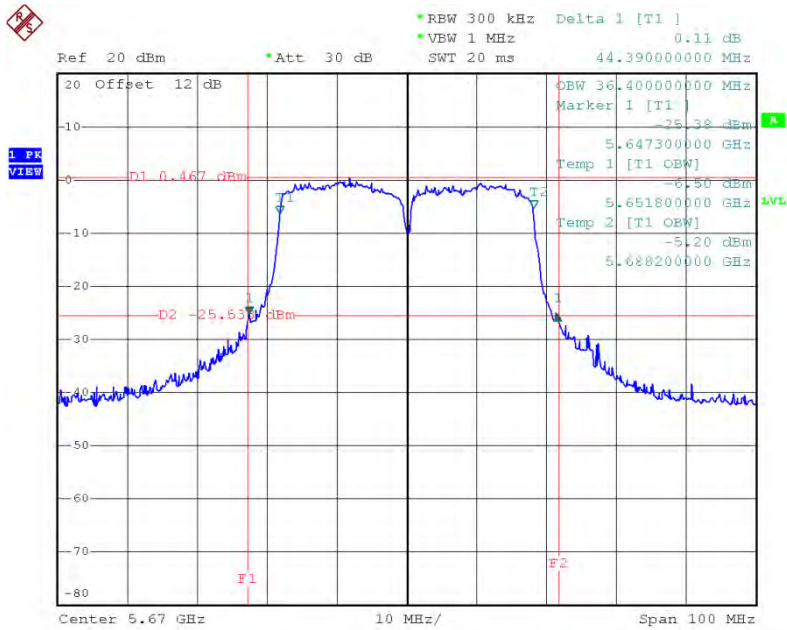


Date: 29.APR.2016 16:35:04

Test Mode: UNII-2C/TX AC80 Mode_CH106


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH106	5530	84.00	76.00
CH122	5610	86.00	76.00

TX CH106

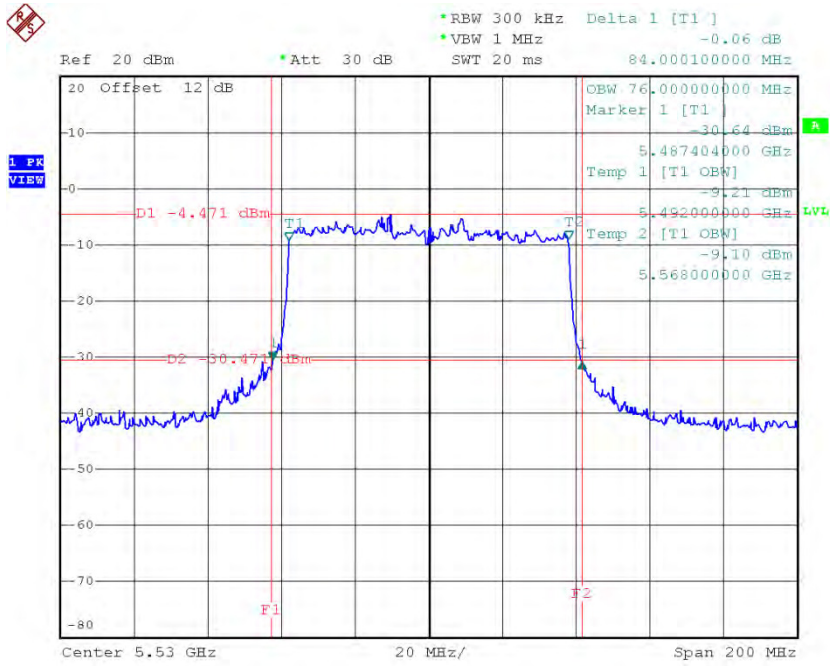

Date: 29.APR.2016 16:38:11

TX CH122

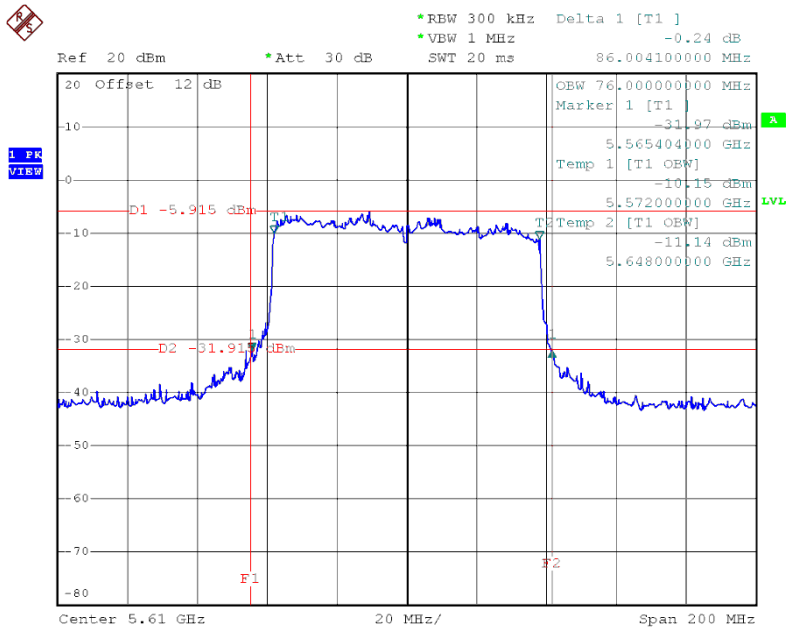

Date: 29.APR.2016 16:45:04

ATTACHMENT F - MAXIMUM OUTPUT POWER

Test Mode: UNII-2A/TX A Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	11.69	0.19	11.88	23.24	0.21
CH60	5300	11.32	0.19	11.51	23.24	0.21
CH64	5320	12.00	0.19	12.19	23.24	0.21

Test Mode: UNII-2A/TX A Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	8.67	0.19	8.86	23.24	0.21
CH60	5300	9.06	0.19	9.25	23.24	0.21
CH64	5320	10.18	0.19	10.37	23.24	0.21

Test Mode: UNII-2A/TX A Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	9.91	0.19	10.10	23.24	0.21
CH60	5300	10.89	0.19	11.08	23.24	0.21
CH64	5320	11.41	0.19	11.60	23.24	0.21

Test Mode: UNII-2A/TX A Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	15.23	23.24	0.21
CH60	5300	15.49	23.24	0.21
CH64	5320	16.22	23.24	0.21

Test Mode: UNII-2A/TX N20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	11.85	0.18	12.03	23.24	0.21
CH60	5300	11.35	0.18	11.53	23.24	0.21
CH64	5320	12.05	0.18	12.23	23.24	0.21

Test Mode: UNII-2A/TX N20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	8.77	0.18	8.95	23.24	0.21
CH60	5300	9.30	0.18	9.48	23.24	0.21
CH64	5320	10.01	0.18	10.19	23.24	0.21

Test Mode: UNII-2A/TX N20 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	10.71	0.18	10.89	23.24	0.21
CH60	5300	10.97	0.18	11.15	23.24	0.21
CH64	5320	11.45	0.18	11.63	23.24	0.21

Test Mode: UNII-2A/TX N20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	15.57	23.24	0.21
CH60	5300	15.58	23.24	0.21
CH64	5320	16.20	23.24	0.21

Test Mode: UNII-2A/TX N40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	7.80	0.55	8.35	23.24	0.21
CH62	5310	8.88	0.55	9.43	23.24	0.21

Test Mode: UNII-2A/TX N40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	6.24	0.55	6.79	23.24	0.21
CH62	5310	6.61	0.55	7.16	23.24	0.21

Test Mode: UNII-2A/TX N40 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	6.37	0.55	6.92	23.24	0.21
CH62	5310	6.00	0.55	6.55	23.24	0.21

Test Mode: UNII-2A/TX N40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	12.19	23.24	0.21
CH62	5310	12.67	23.24	0.21

Test Mode: UNII-2C/TX A Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	13.44	0.19	13.63	23.24	0.21
CH116	5580	12.99	0.19	13.18	23.24	0.21
CH140	5700	10.58	0.19	10.77	23.24	0.21

Test Mode: UNII-2C/TX A Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	10.03	0.19	10.22	23.24	0.21
CH116	5580	10.27	0.19	10.46	23.24	0.21
CH140	5700	8.17	0.19	8.36	23.24	0.21

Test Mode: UNII-2C/TX A Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	11.19	0.19	11.38	23.24	0.21
CH116	5580	11.39	0.19	11.58	23.24	0.21
CH140	5700	8.03	0.19	8.22	23.24	0.21

Test Mode: UNII-2C/TX A Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	16.75	23.24	0.21
CH116	5580	16.65	23.24	0.21
CH140	5700	14.05	23.24	0.21

Test Mode: UNII-2C/TX N20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	13.85	0.18	14.03	23.24	0.21
CH116	5580	13.00	0.18	13.18	23.24	0.21
CH140	5700	10.54	0.18	10.72	23.24	0.21

Test Mode: UNII-2C/TX N20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	9.96	0.18	10.14	23.24	0.21
CH116	5580	10.01	0.18	10.19	23.24	0.21
CH140	5700	7.90	0.18	8.08	23.24	0.21

Test Mode: UNII-2C/TX N20 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	10.61	0.18	10.79	23.24	0.21
CH116	5580	11.38	0.18	11.56	23.24	0.21
CH140	5700	7.94	0.18	8.12	23.24	0.21

Test Mode: UNII-2C/TX N20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	16.78	23.24	0.21
CH116	5580	16.59	23.24	0.21
CH140	5700	13.93	23.24	0.21

Test Mode: UNII-2C/TX N40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	12.81	0.55	13.36	23.24	0.21
CH110	5550	12.27	0.55	12.82	23.24	0.21
CH134	5670	9.78	0.55	10.33	23.24	0.21

Test Mode: UNII-2C/TX N40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	8.88	0.55	9.43	23.24	0.21
CH110	5550	9.09	0.55	9.64	23.24	0.21
CH134	5670	7.79	0.55	8.34	23.24	0.21

Test Mode: UNII-2C/TX N40 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	9.55	0.55	10.10	23.24	0.21
CH110	5550	10.11	0.55	10.66	23.24	0.21
CH134	5670	7.84	0.55	8.39	23.24	0.21

Test Mode: UNII-2C/TX N40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	16.10	23.24	0.21
CH110	5550	16.02	23.24	0.21
CH134	5670	13.90	23.24	0.21

Test Mode: UNII-2A/TX AC20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	11.19	0.18	11.37	23.24	0.21
CH60	5300	10.79	0.18	10.97	23.24	0.21
CH64	5320	11.32	0.18	11.50	23.24	0.21

Test Mode: UNII-2A/TX AC20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	8.13	0.18	8.31	23.24	0.21
CH60	5300	8.69	0.18	8.87	23.24	0.21
CH64	5320	9.59	0.18	9.77	23.24	0.21

Test Mode: UNII-2A/TX AC20 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	10.01	0.18	10.19	23.24	0.21
CH60	5300	10.30	0.18	10.48	23.24	0.21
CH64	5320	10.76	0.18	10.94	23.24	0.21

Test Mode: UNII-2A/TX AC20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	14.90	23.24	0.21
CH60	5300	14.97	23.24	0.21
CH64	5320	15.56	23.24	0.21

Test Mode: UNII-2A/TX AC40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	8.19	0.55	8.74	23.24	0.21
CH62	5310	8.99	0.55	9.54	23.24	0.21

Test Mode: UNII-2A/TX AC40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	6.49	0.55	7.04	23.24	0.21
CH62	5310	6.79	0.55	7.34	23.24	0.21

Test Mode: UNII-2A/TX AC40 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	6.52	0.55	7.07	23.24	0.21
CH62	5310	6.12	0.55	6.67	23.24	0.21

Test Mode: UNII-2A/TX AC40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	12.46	23.24	0.21
CH62	5310	12.80	23.24	0.21

Test Mode: UNII-2A/TX AC80 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH55	5290	3.35	0.52	3.87	23.24	0.21

Test Mode: UNII-2A/TX AC80 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH55	5290	1.25	0.52	1.77	23.24	0.21

Test Mode: UNII-2A/TX AC80 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH55	5290	1.10	0.52	1.62	23.24	0.21

Test Mode: UNII-2A/TX AC80 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH55	5290	5.29	23.24	0.21

Test Mode: UNII-2C/TX AC20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	13.56	0.18	13.74	23.24	0.21
CH116	5580	12.37	0.18	12.55	23.24	0.21
CH140	5700	10.10	0.18	10.28	23.24	0.21

Test Mode: UNII-2C/TX AC20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	9.32	0.18	9.50	23.24	0.21
CH116	5580	9.47	0.18	9.65	23.24	0.21
CH140	5700	8.49	0.18	8.67	23.24	0.21

Test Mode: UNII-2C/TX AC20 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	10.00	0.18	10.18	23.24	0.21
CH116	5580	11.18	0.18	11.36	23.24	0.21
CH140	5700	9.49	0.18	9.67	23.24	0.21

Test Mode: UNII-2C/TX AC20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	16.33	23.24	0.21
CH116	5580	16.12	23.24	0.21
CH140	5700	14.36	23.24	0.21

Test Mode: UNII-2C/TX AC40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	12.80	0.55	13.35	23.24	0.21
CH110	5550	12.48	0.55	13.03	23.24	0.21
CH134	5670	10.16	0.55	10.71	23.24	0.21

Test Mode: UNII-2C/TX AC40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	8.98	0.55	9.53	23.24	0.21
CH110	5550	9.40	0.55	9.95	23.24	0.21
CH134	5670	8.07	0.55	8.62	23.24	0.21

Test Mode: UNII-2C/TX AC40 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	10.15	0.55	10.70	23.24	0.21
CH110	5550	10.49	0.55	11.04	23.24	0.21
CH134	5670	8.08	0.55	8.63	23.24	0.21

Test Mode: UNII-2C/TX AC40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	16.27	23.24	0.21
CH110	5550	16.30	23.24	0.21
CH134	5670	14.20	23.24	0.21

Test Mode: UNII-2C/TX AC80 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	6.33	0.52	6.85	23.24	0.21
CH122	5610	5.51	0.52	6.03	23.24	0.21

Test Mode: UNII-2C/TX AC80 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	2.89	0.52	3.41	23.24	0.21
CH122	5610	3.00	0.52	3.52	23.24	0.21

Test Mode: UNII-2C/TX AC80 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	3.68	0.52	4.20	23.24	0.21
CH122	5610	3.72	0.52	4.24	23.24	0.21

Test Mode: UNII-2C/TX AC80 Mode_Total


Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	9.85	23.24	0.21
CH122	5610	9.50	23.24	0.21

ATTACHMENT G - POWER SPECTRAL DENSITY


Test Mode: UNII-2A/ TX A Mode_CH52/CH60/CH64_ANT 1

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	-0.43	0.19	-0.24	10.24
CH60	5300	-0.43	0.19	-0.24	10.24
CH64	5320	0.54	0.19	0.73	10.24


CH52

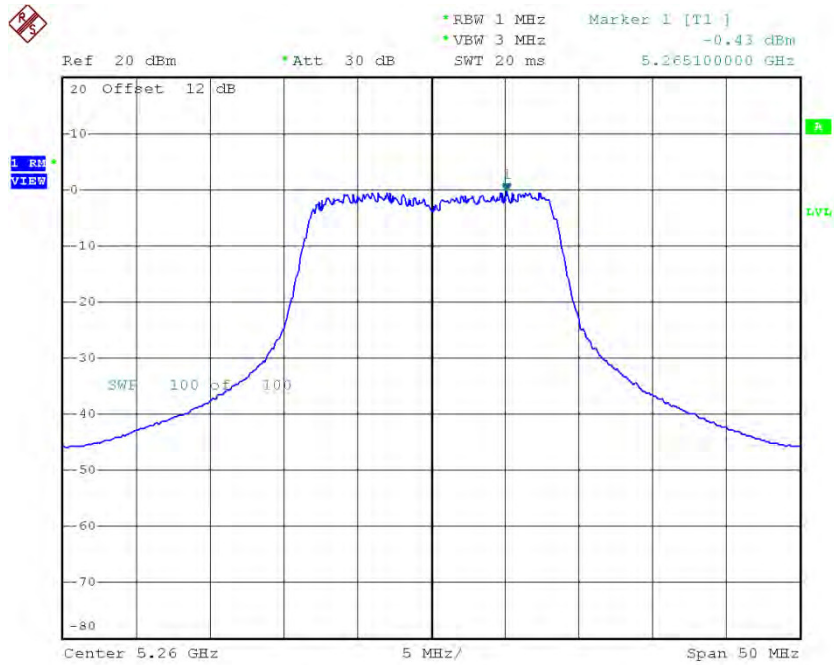

Date: 29.APR.2016 11:49:21

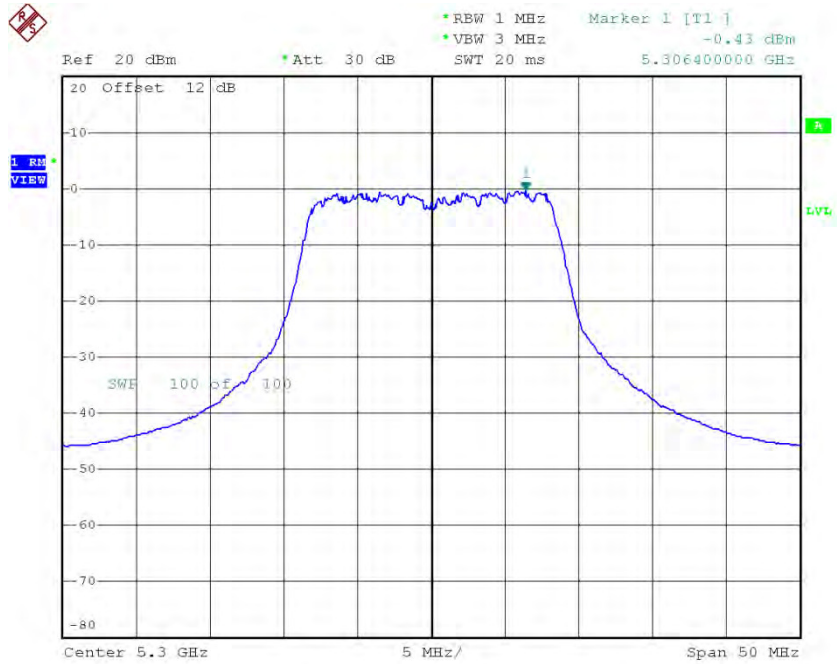CH60

Date: 29.APR.2016 13:17:21

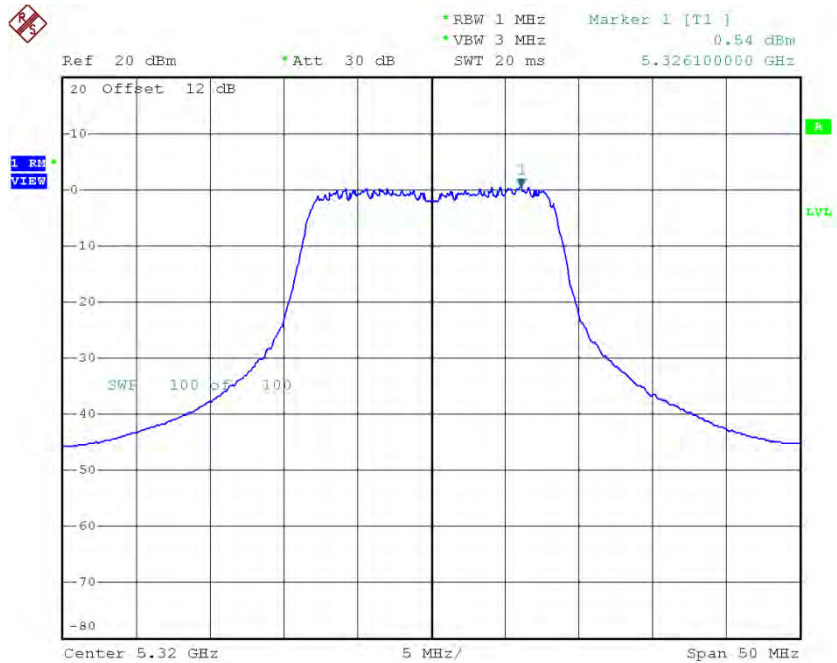
CH64

Date: 29.APR.2016 13:52:29


Test Mode: UNII-2A/ TX A Mode_CH52/CH60/CH64_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	-2.82	0.19	-2.63	10.24
CH60	5300	-2.07	0.19	-1.88	10.24
CH64	5320	-1.51	0.19	-1.32	10.24


CH52

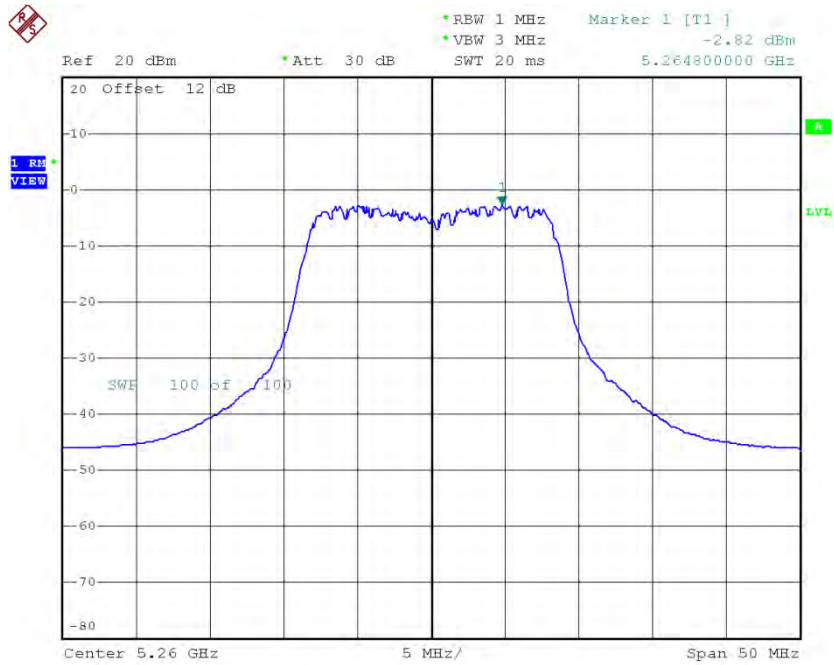

Date: 29.APR.2016 13:24:11

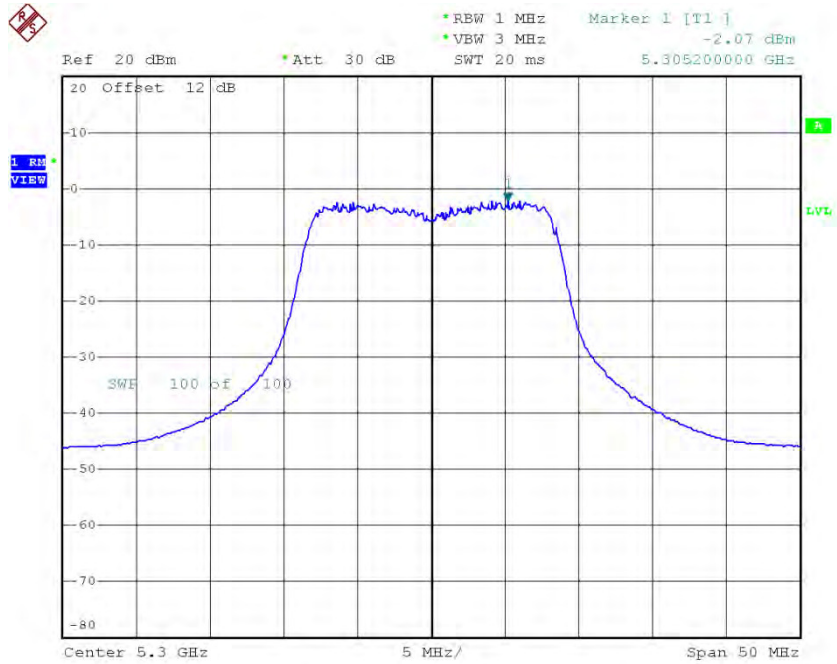CH60

Date: 29.APR.2016 13:18:47

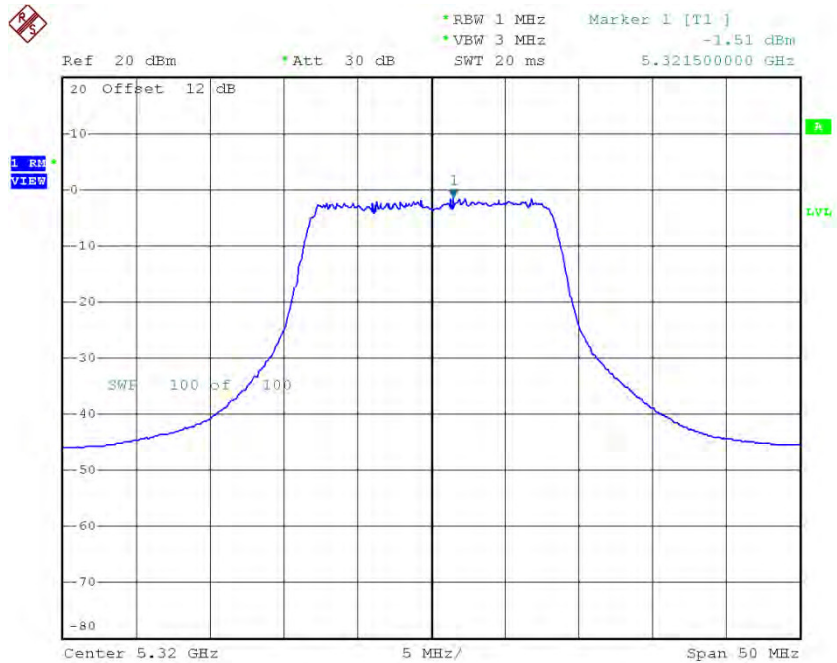
CH64

Date: 29.APR.2016 13:54:16

Test Mode: UNII-2A/ TX A Mode_CH52/CH60/CH64_ANT 3


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	-1.13	0.19	-0.94	10.24
CH60	5300	-0.93	0.19	-0.74	10.24
CH64	5320	-0.16	0.19	0.03	10.24

CH52

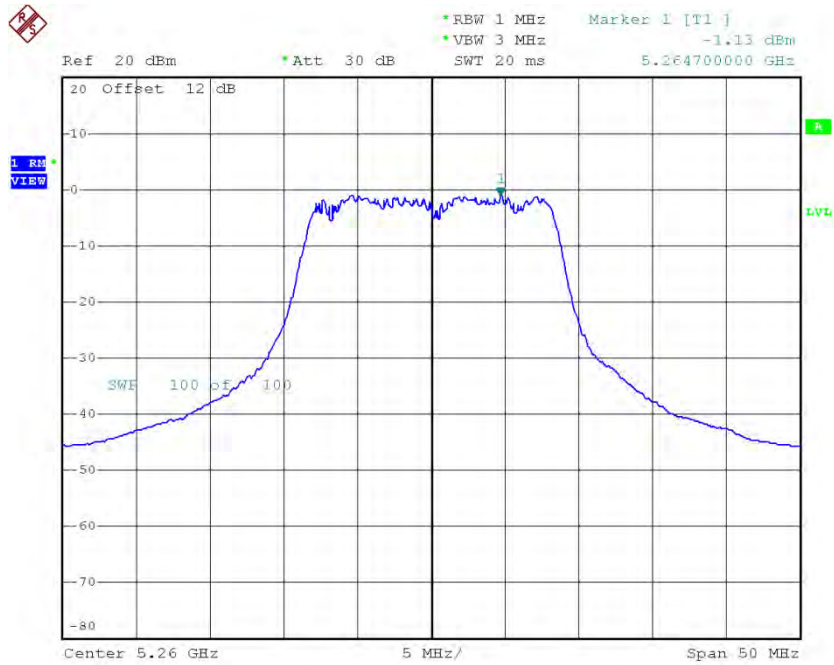


Date: 29.APR.2016 13:21:16

CH60

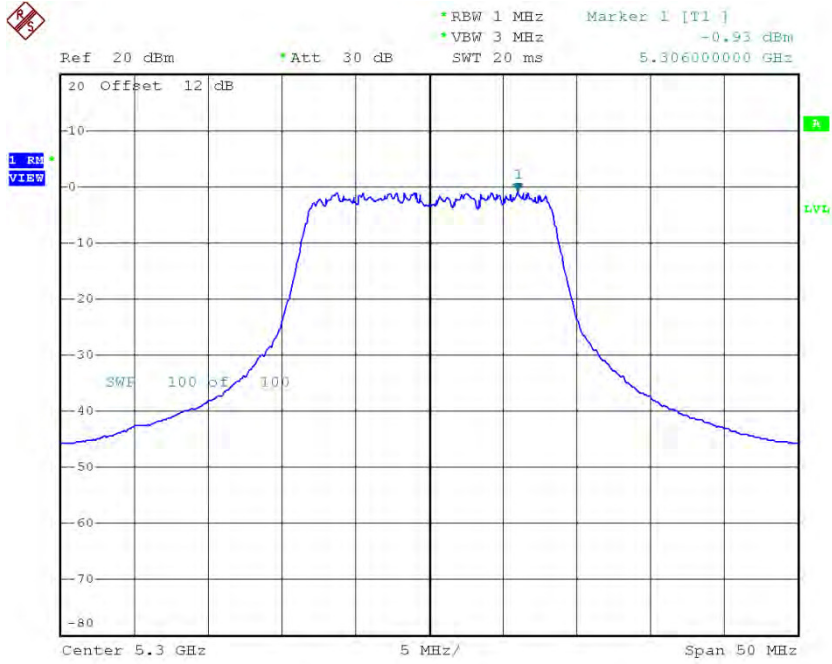

Date: 29.APR.2016 13:19:46

CH64

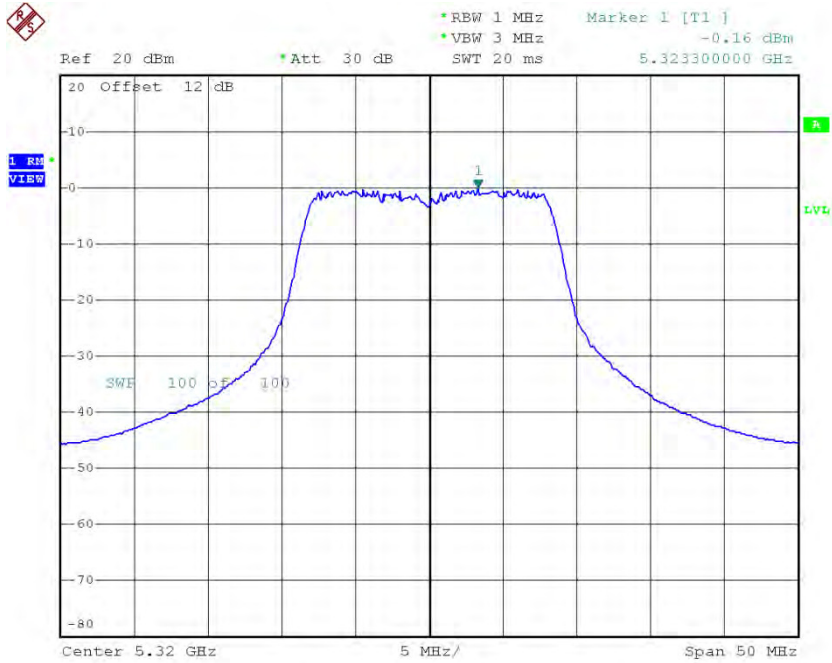

Date: 29.APR.2016 13:55:36


Test Mode: UNII-2A/ TX A Mode_CH52/CH60/CH64_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	3.50	10.24
CH60	5300	3.75	10.24
CH64	5320	4.55	10.24

Test Mode: UNII-2A/TX N20 Mode_CH52/CH60/CH64_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	0.29	0.18	0.47	10.24
CH60	5300	-0.55	0.18	-0.37	10.24
CH64	5320	0.09	0.18	0.27	10.24

CH52

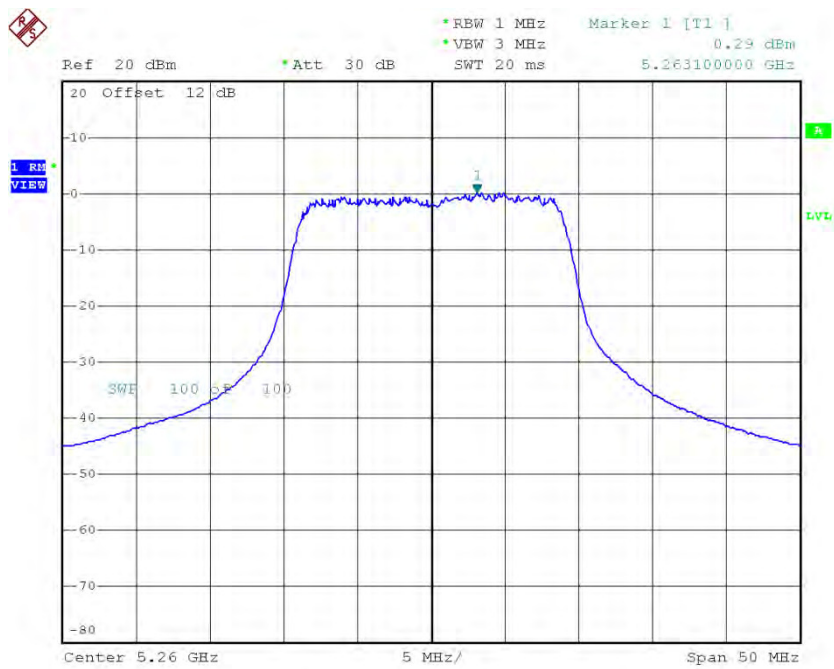


Date: 29.APR.2016 13:58:16

CH60

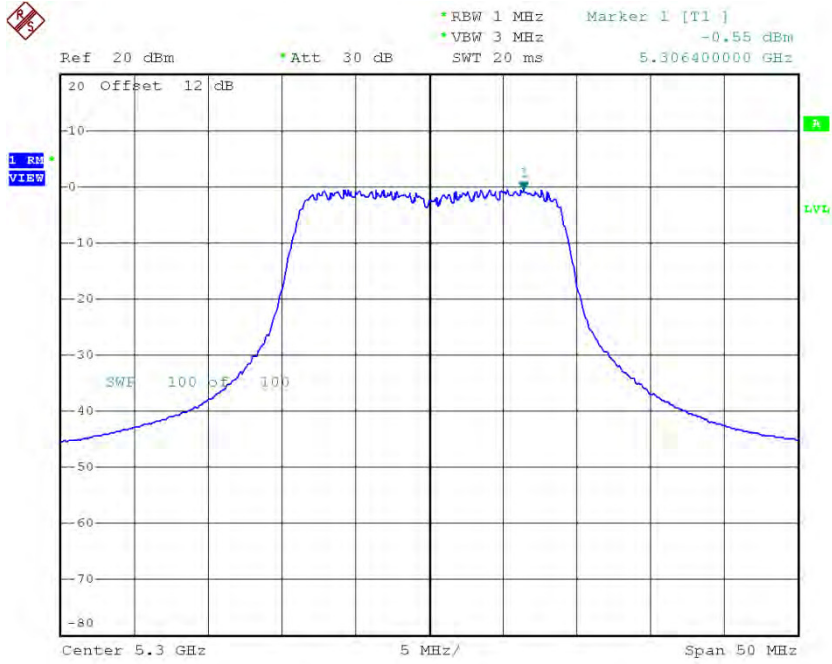

Date: 29.APR.2016 14:08:09

CH64

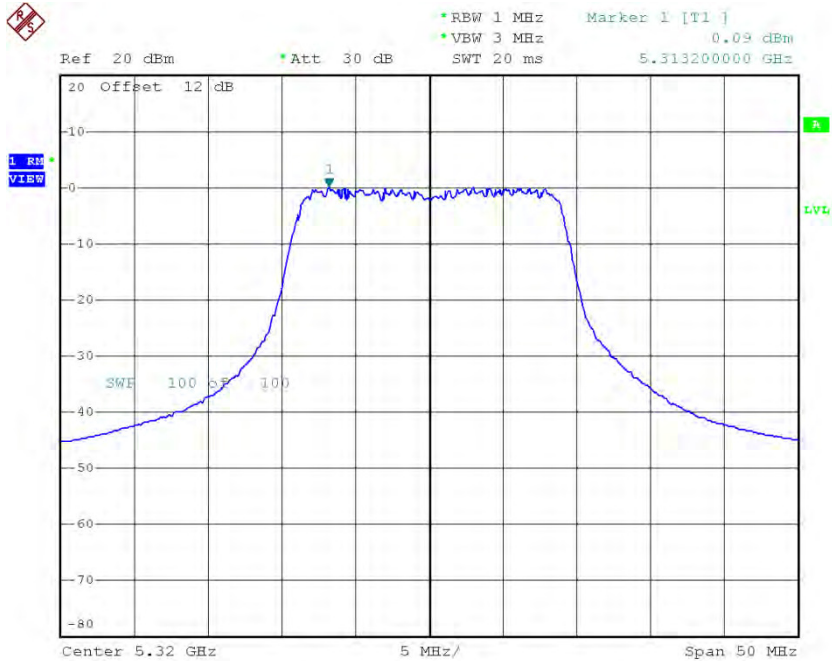


Date: 29.APR.2016 14:09:04


Test Mode: UNII-2A/TX N20 Mode_CH52/CH60/CH64_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	-3.28	0.18	-3.10	10.24
CH60	5300	-2.61	0.18	-2.43	10.24
CH64	5320	-1.97	0.18	-1.79	10.24


CH52

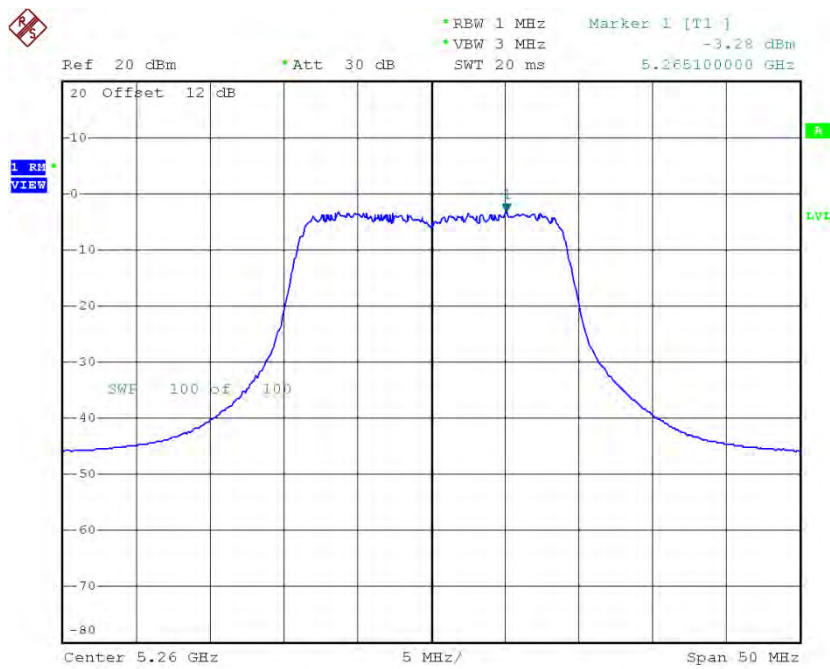

Date: 29.APR.2016 14:00:07

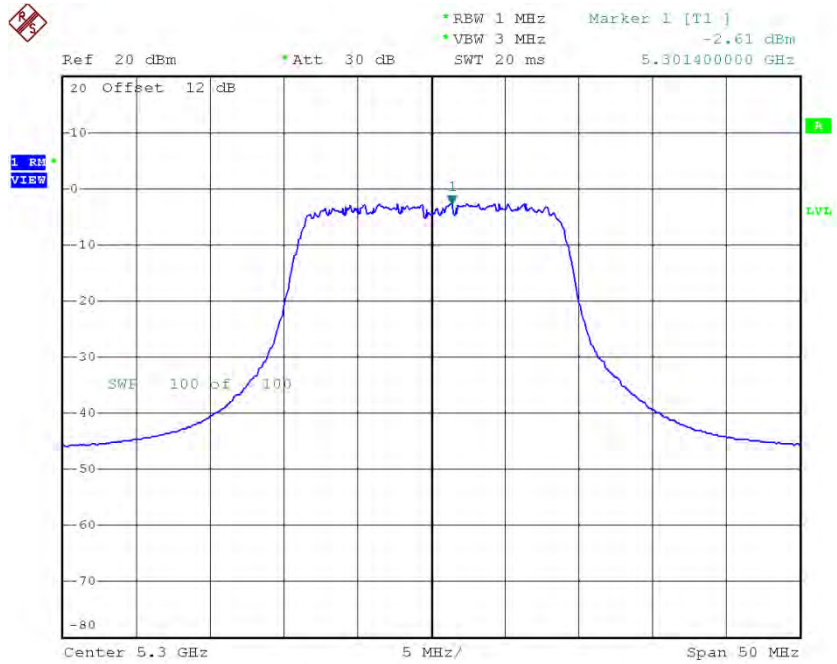CH60


Date: 29.APR.2016 14:05:13

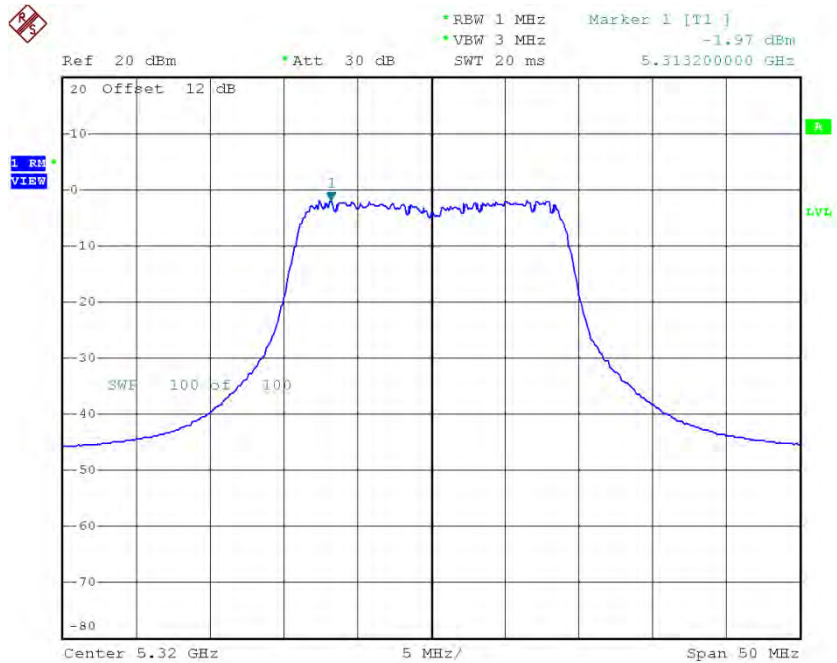CH64

Date: 29.APR.2016 14:06:15


Test Mode: UNII-2A/TX N20 Mode_CH52/CH60/CH64_ANT 3

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	-1.21	0.18	-1.03	10.24
CH60	5300	-1.07	0.18	-0.89	10.24
CH64	5320	-0.19	0.18	-0.01	10.24

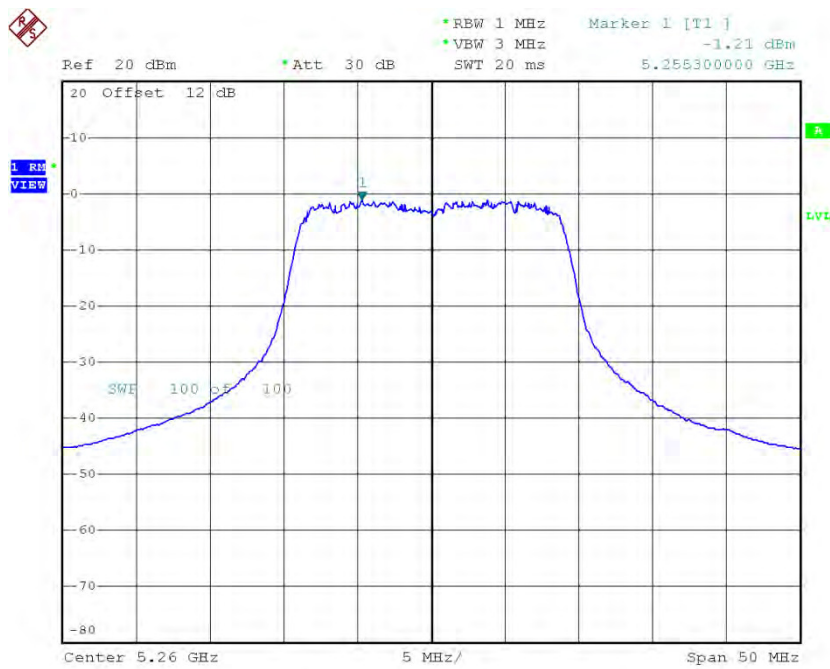CH52


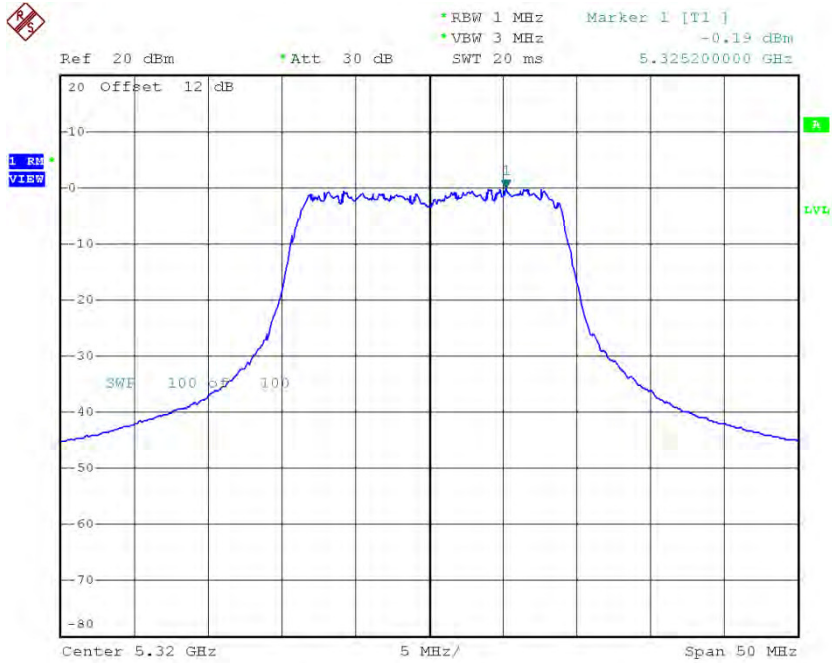
Date: 29.APR.2016 14:01:11

CH60

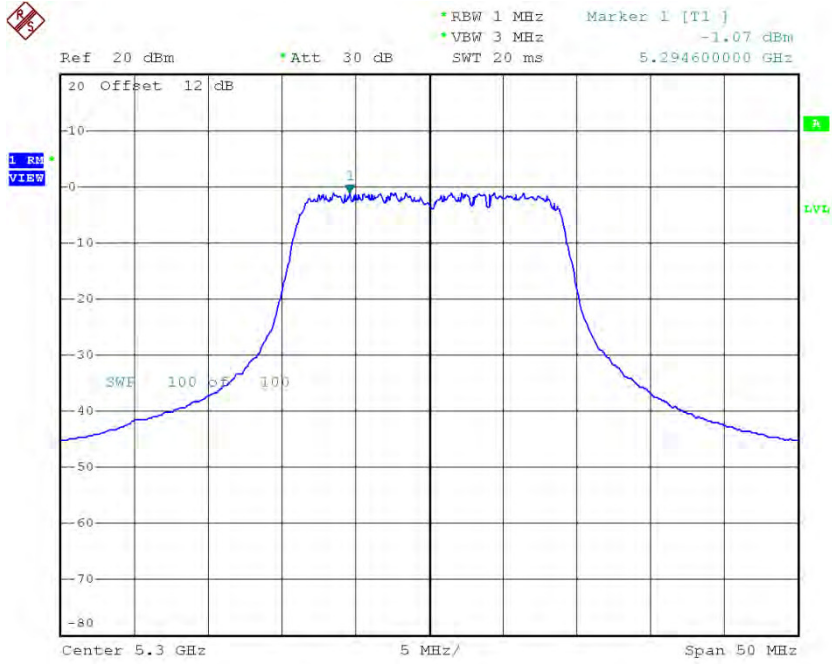

Date: 29.APR.2016 14:02:57

CH64




Date: 29.APR.2016 14:03:53

Test Mode: UNII-2A/TX N20 Mode_CH52/CH60/CH64_Total


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	3.79	10.24
CH60	5300	3.63	10.24
CH64	5320	4.35	10.24

Test Mode: UNII-2A/TX N40 Mode_CH54/CH62_ANT 1

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH54	5270	-5.83	0.55	-5.28	10.24
CH62	5310	-5.43	0.55	-4.88	10.24

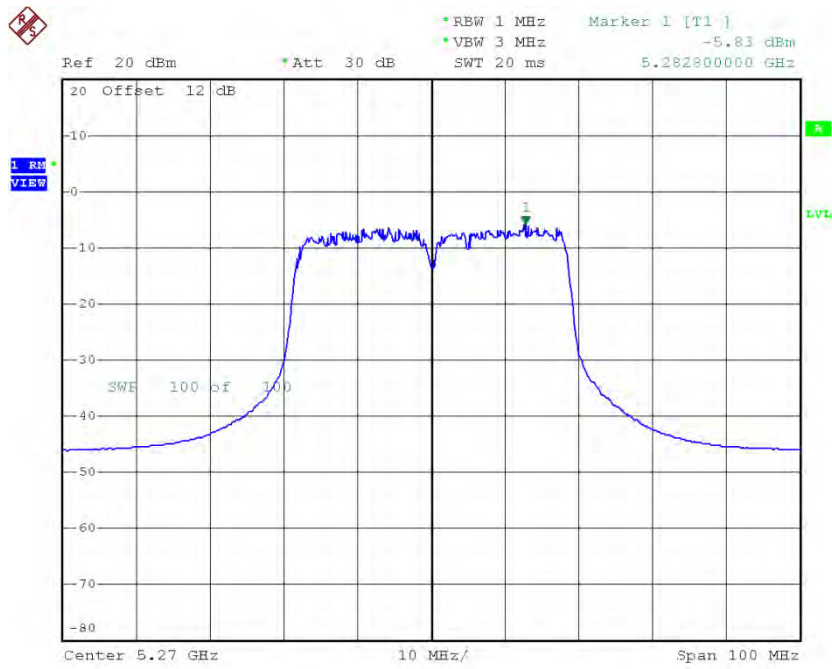CH54

Date: 29.APR.2016 14:34:21

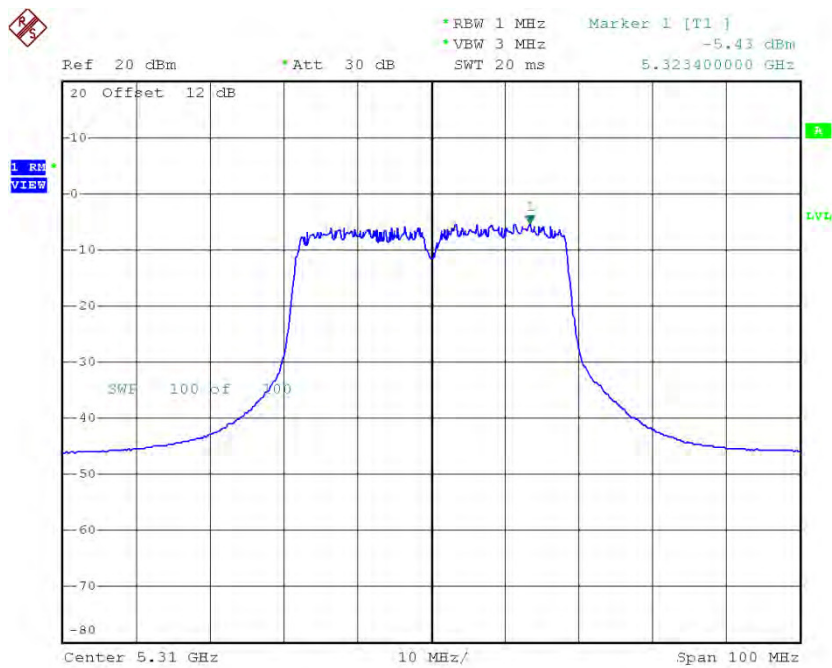
CH62

Date: 29.APR.2016 14:35:38

Test Mode: UNII-2A/TX N40 Mode_CH54/CH62_ANT 2


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH54	5270	-7.69	0.55	-7.14	10.24
CH62	5310	-7.25	0.55	-6.70	10.24

CH54

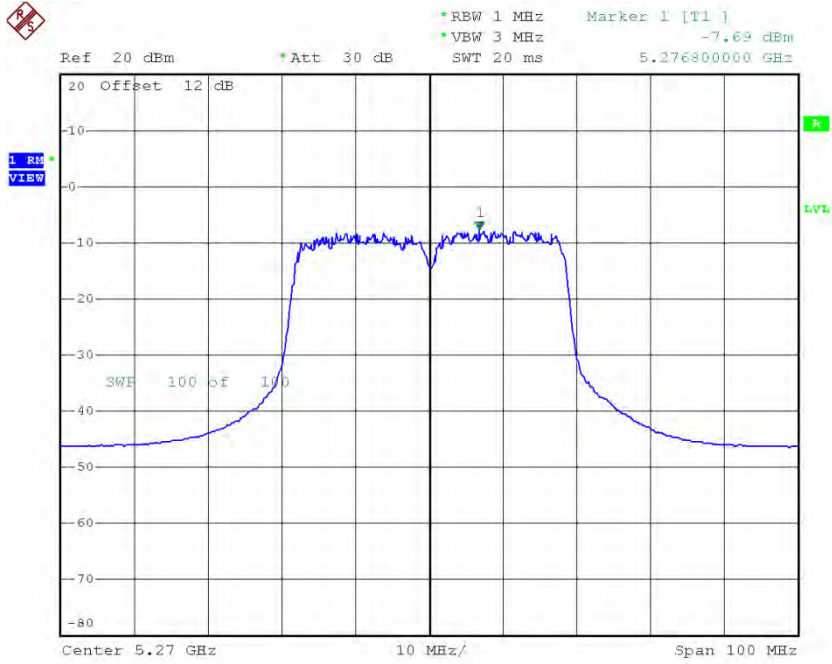

Date: 29.APR.2016 14:31:31

CH62

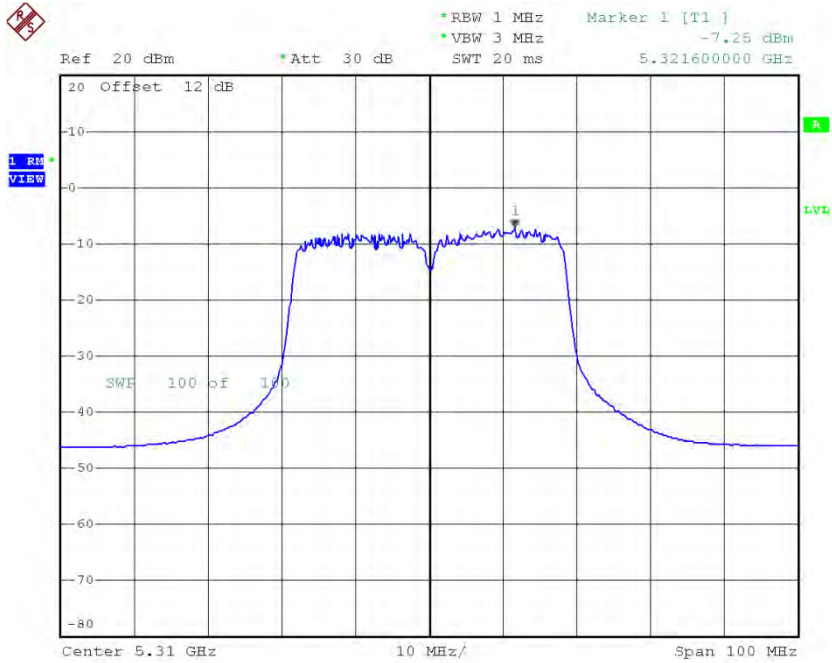


Date: 29.APR.2016 14:33:15

Test Mode: UNII-2A/TX N40 Mode_CH54/CH62_ANT 3


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH54	5270	-7.61	0.55	-7.06	10.24
CH62	5310	-8.17	0.55	-7.62	10.24

CH54

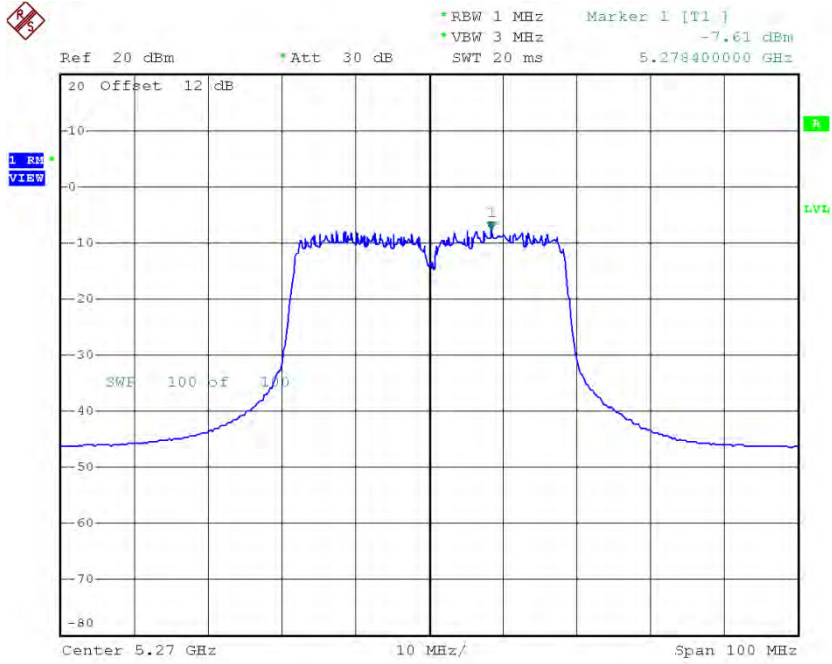

Date: 29.APR.2016 14:28:47

CH62

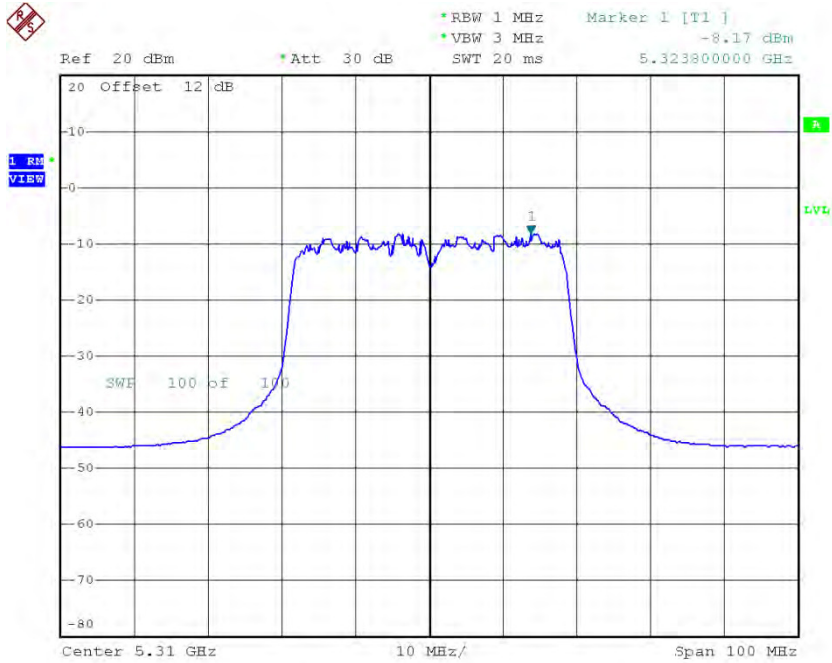

Date: 29.APR.2016 14:30:03


Test Mode: UNII-2A/TX N40 Mode_CH54/CH62_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH54	5270	-1.63	10.24
CH62	5310	-1.47	10.24

Test Mode: UNII-2C/ TX A Mode_CH100/CH116/CH140_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH100	5500	2.78	0.19	2.97	10.24
CH116	5580	1.85	0.19	2.04	10.24
CH140	5700	-0.70	0.19	-0.51	10.24

CH100

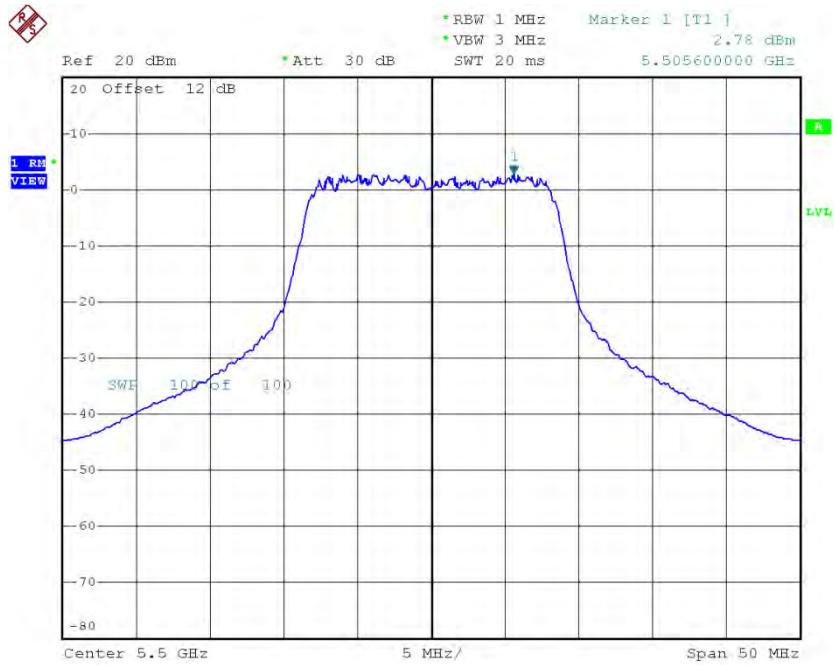


Date: 29.APR.2016 13:31:33

CH116

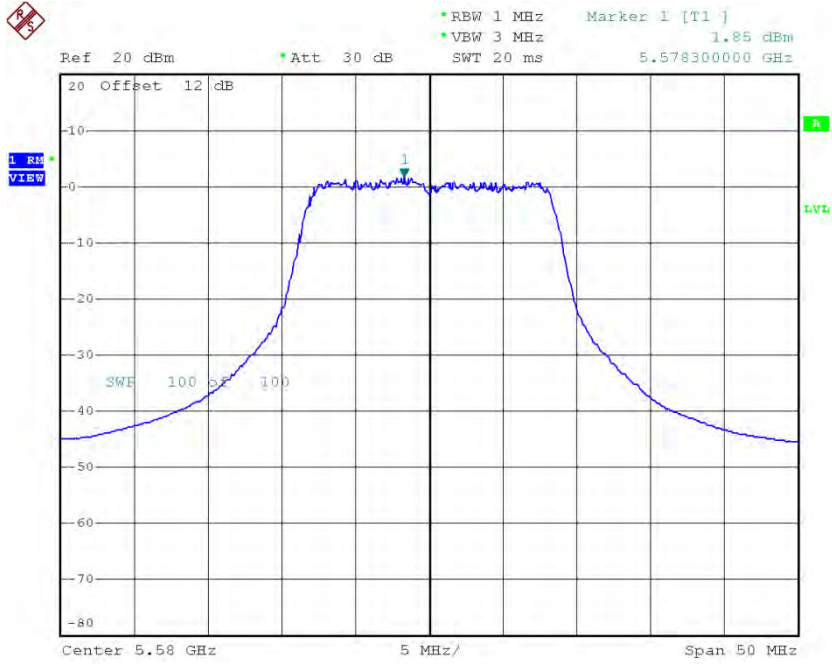

Date: 29.APR.2016 13:44:25

CH140

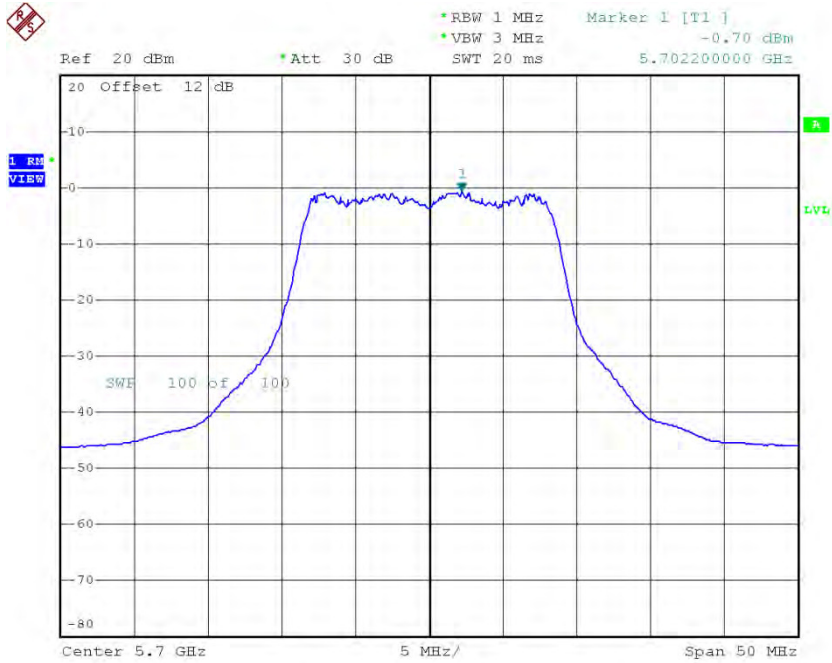


Date: 29.APR.2016 13:50:49


Test Mode: UNII-2C/ TX A Mode_CH100/CH116/CH140_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH100	5500	-1.73	0.19	-1.54	10.24
CH116	5580	-1.06	0.19	-0.87	10.24
CH140	5700	-1.38	0.19	-1.19	10.24


CH100

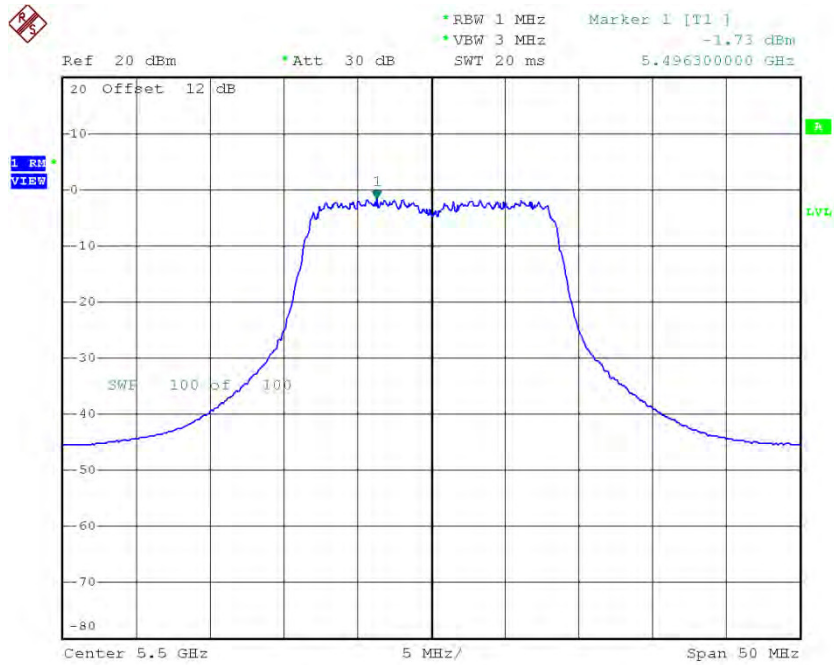

Date: 29.APR.2016 13:36:48

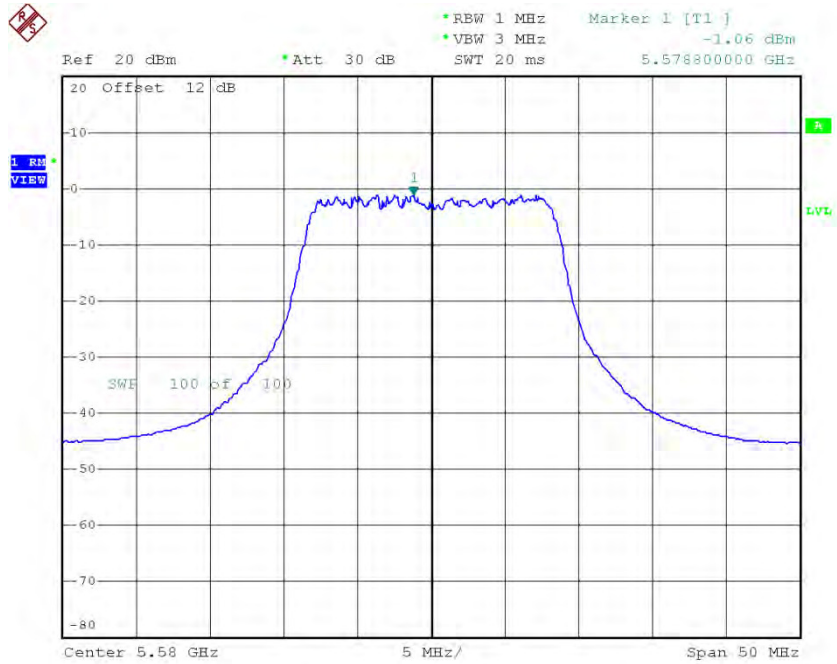CH116

Date: 29.APR.2016 13:45:57

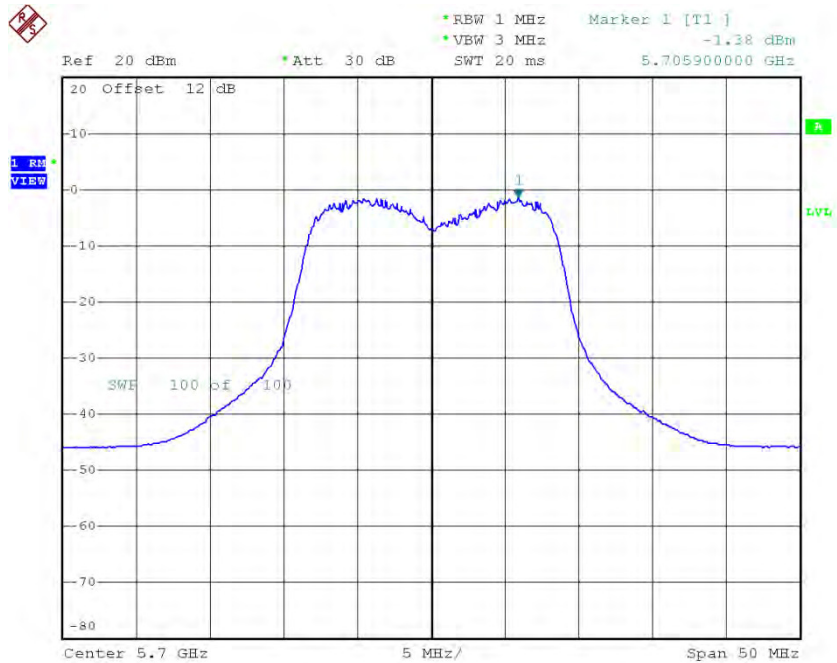
CH140

Date: 29.APR.2016 13:49:26

Test Mode: UNII-2C/ TX A Mode_CH100/CH116/CH140_ANT 3


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH100	5500	-1.80	0.19	-1.61	10.24
CH116	5580	0.50	0.19	0.69	10.24
CH140	5700	-1.06	0.19	-0.87	10.24

CH100

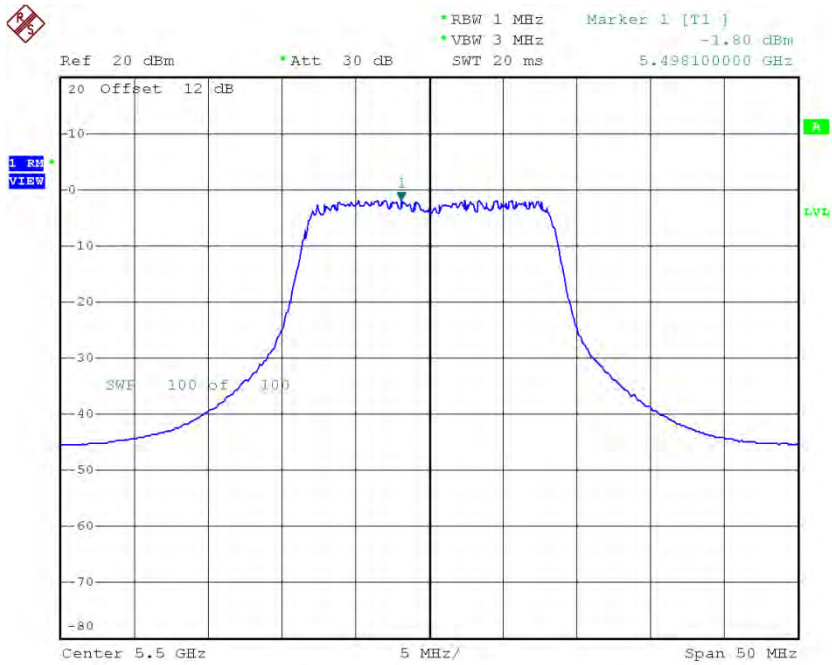


Date: 29.APR.2016 13:38:08

CH116

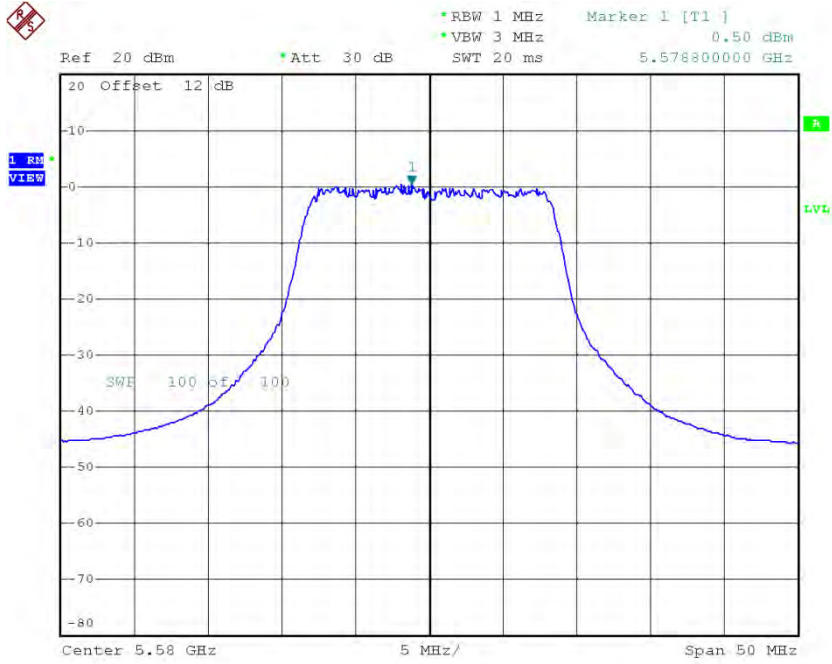

Date: 29.APR.2016 13:46:52

CH140

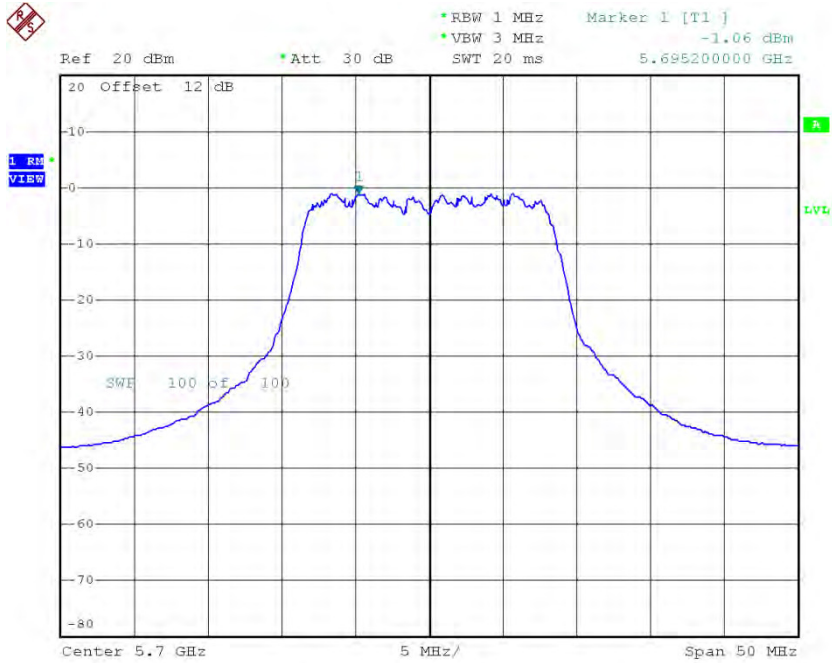

Date: 29.APR.2016 13:48:05


Test Mode: UNII-2C/ TX A Mode_CH100/CH116/CH140_Total

Channel	Frequency (MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH100	5500	5.20	10.24
CH116	5580	5.44	10.24
CH140	5700	3.80	10.24


Test Mode: UNII-2C/TX N20 Mode_CH100/CH116/CH140_ANT 1

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH100	5500	2.41	0.18	2.59	10.24
CH116	5580	1.80	0.18	1.98	10.24
CH140	5700	-0.35	0.18	-0.17	10.24


CH100

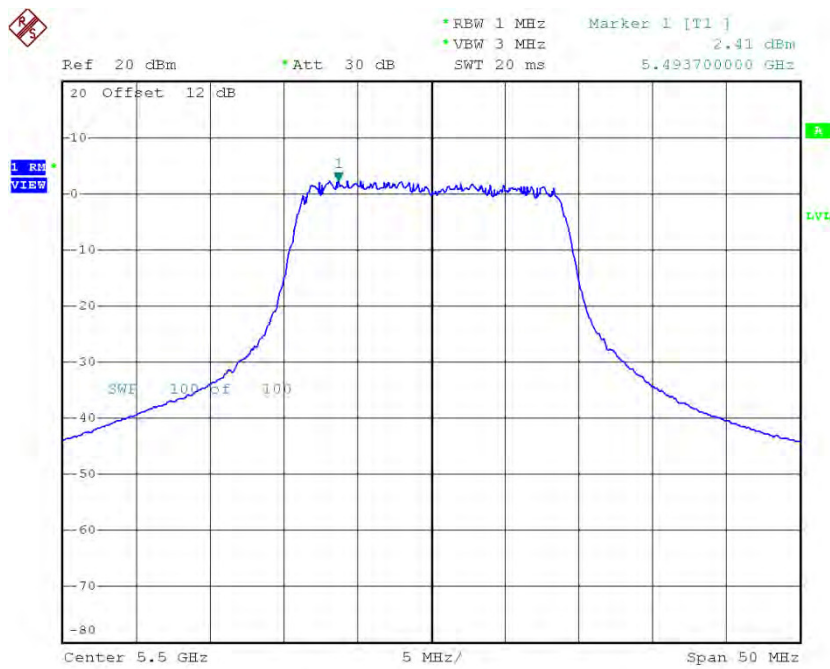

Date: 29.APR.2016 15:12:25

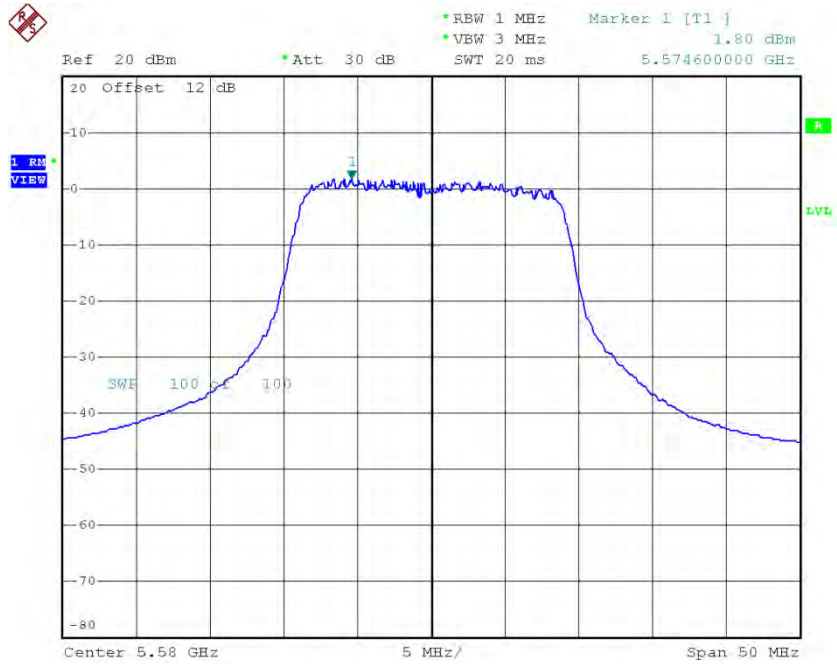CH116

Date: 29.APR.2016 15:22:02

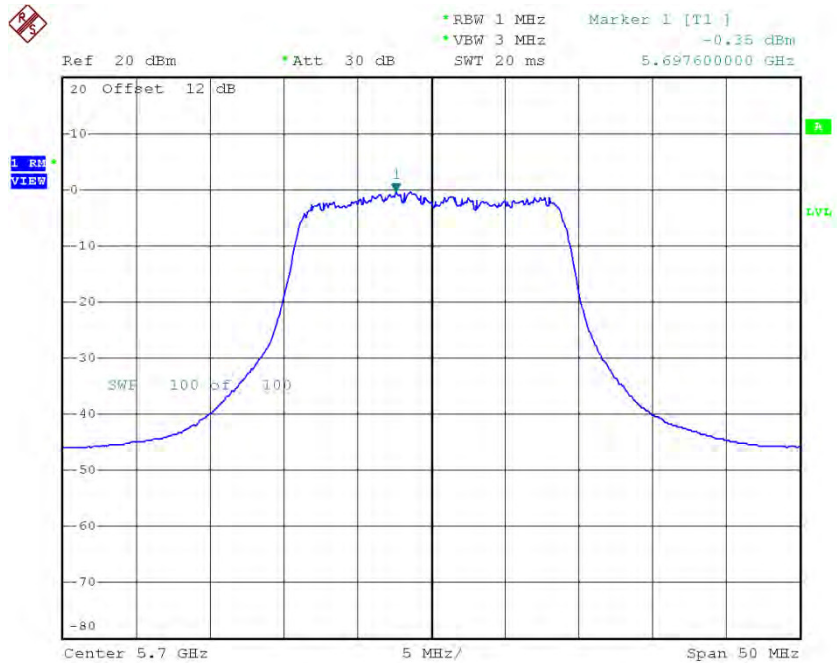
CH140

Date: 29.APR.2016 15:22:53

Test Mode: UNII-2C/TX N20 Mode_CH100/CH116/CH140_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH100	5500	-1.45	0.18	-1.27	10.24
CH116	5580	-0.43	0.18	-0.25	10.24
CH140	5700	-2.57	0.18	-2.39	10.24

CH100

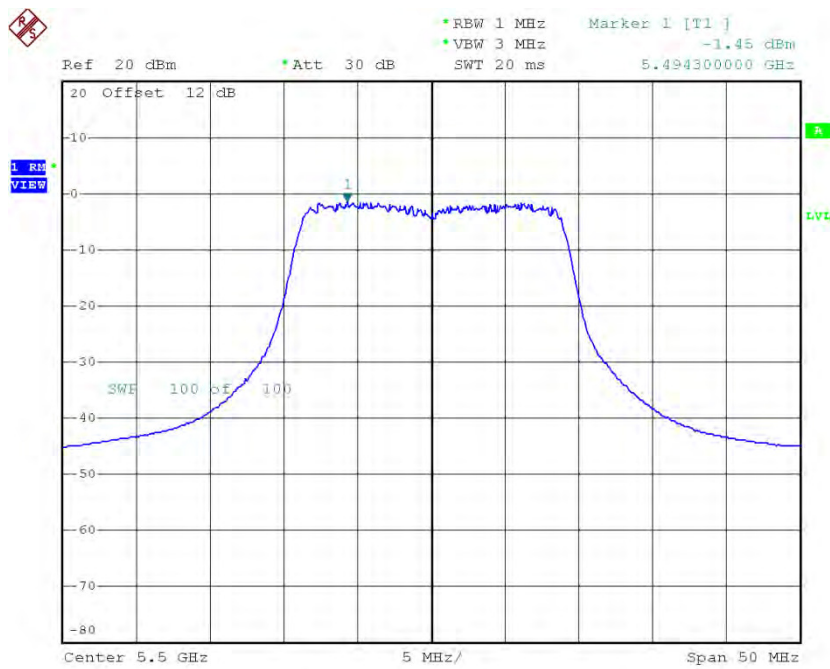


Date: 29.APR.2016 15:13:54

Test Mode: UNII-2C/TX N20 Mode_CH100/CH116/CH140_ANT 3


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH100	5500	-0.19	0.18	-0.01	10.24
CH116	5580	0.47	0.18	0.65	10.24
CH140	5700	-1.05	0.18	-0.87	10.24

CH100

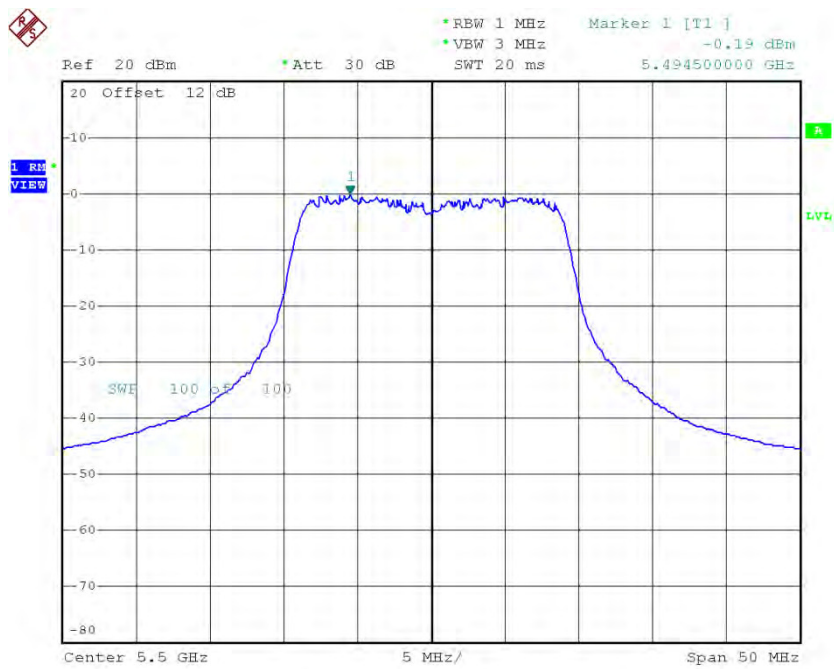


Date: 29.APR.2016 15:15:33

CH116

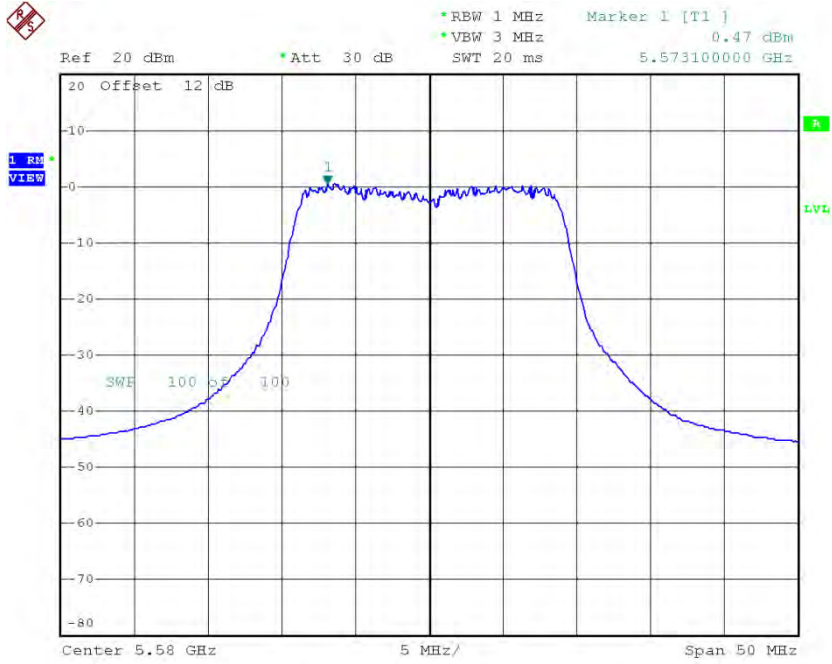

Date: 29.APR.2016 15:20:41

CH140

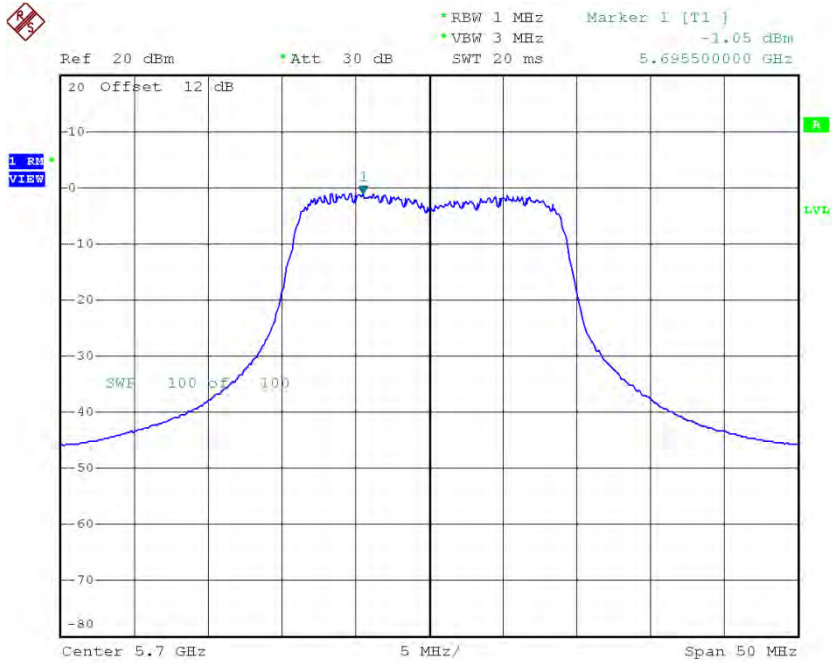

Date: 29.APR.2016 15:25:02


Test Mode: UNII-2C/TX N20 Mode_CH100/CH116/CH140_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH100	5500	5.51	10.24
CH116	5580	5.66	10.24
CH140	5700	3.72	10.24

Test Mode: UNII-2C/TX N40 Mode_CH102/CH110/CH134_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH102	5510	-1.94	0.55	-1.39	10.24
CH110	5550	-1.89	0.55	-1.34	10.24
CH134	5670	-4.57	0.55	-4.02	10.24

CH102

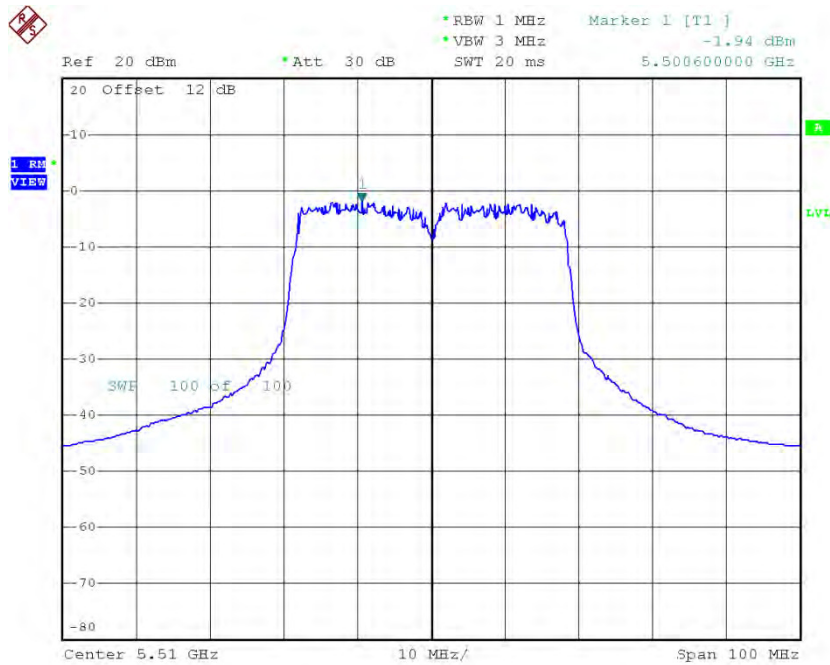


Date: 29.APR.2016 15:57:58

CH110

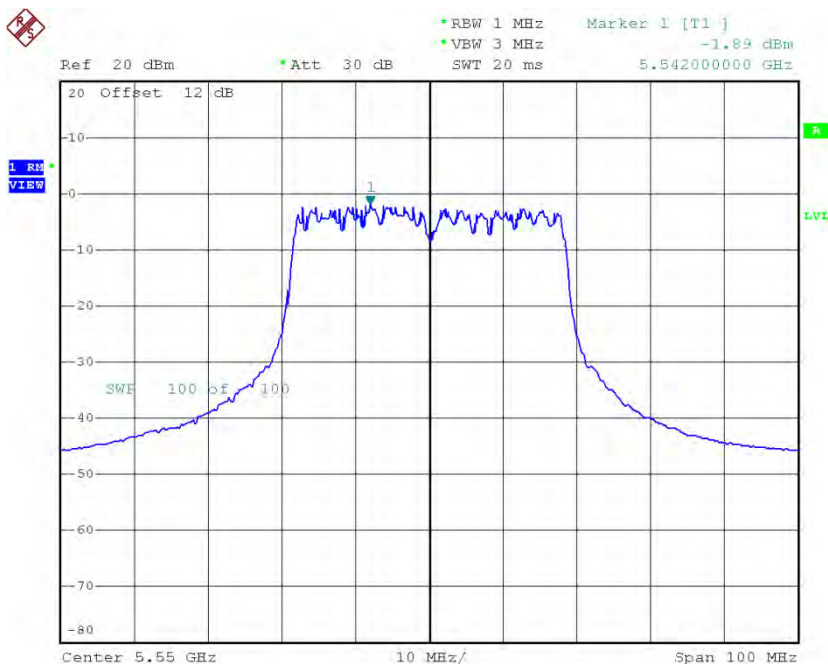

Date: 29.APR.2016 16:07:37

CH134

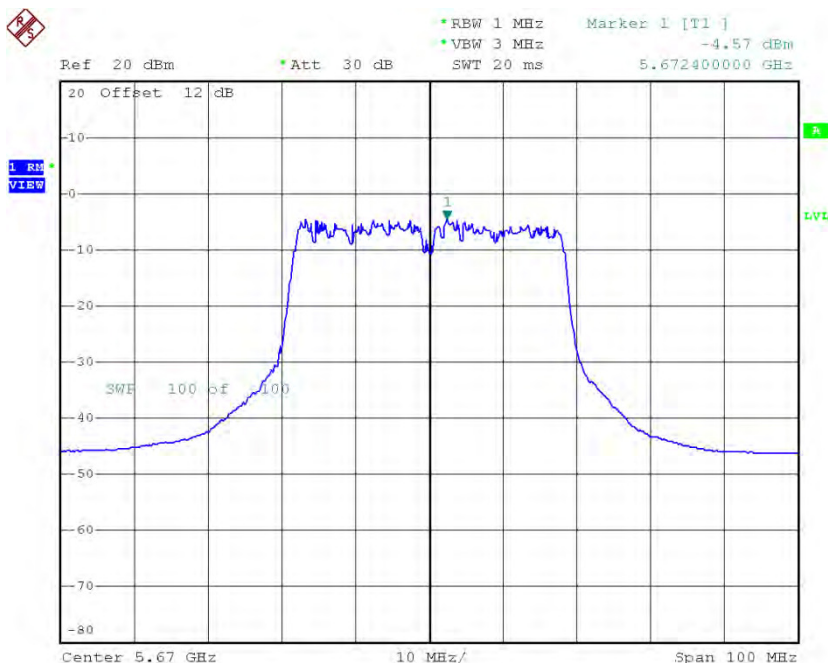


Date: 29.APR.2016 16:12:04


Test Mode: UNII-2C/TX N40 Mode_CH102/CH110/CH134_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH102	5510	-5.73	0.55	-5.18	10.24
CH110	5550	-5.10	0.55	-4.55	10.24
CH134	5670	-5.97	0.55	-5.42	10.24


CH102

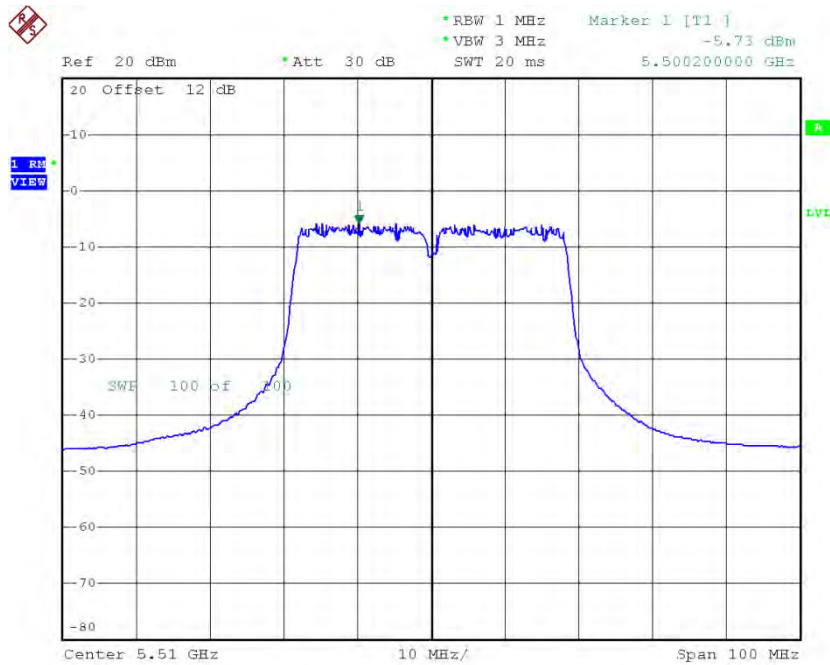

Date: 29.APR.2016 15:59:08

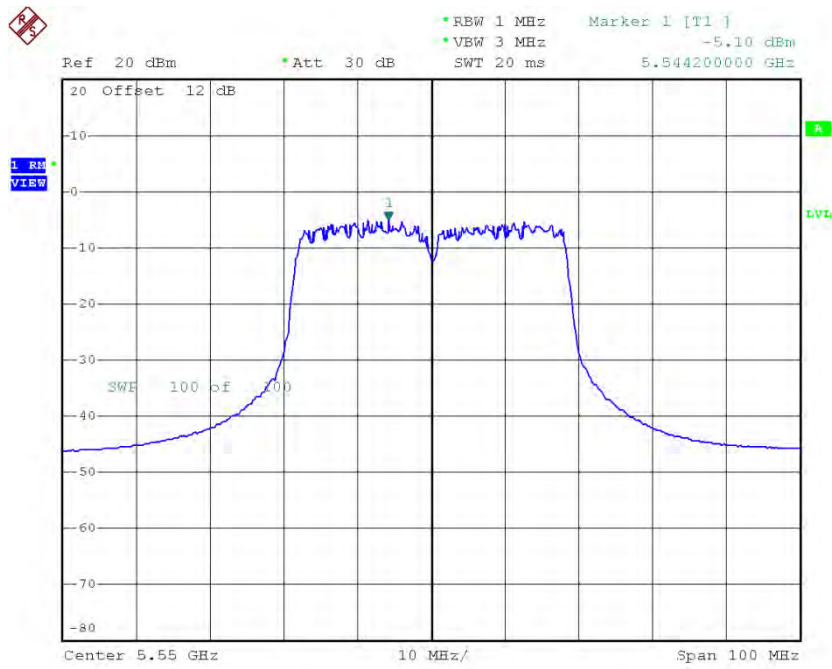CH110

Date: 29.APR.2016 16:06:53

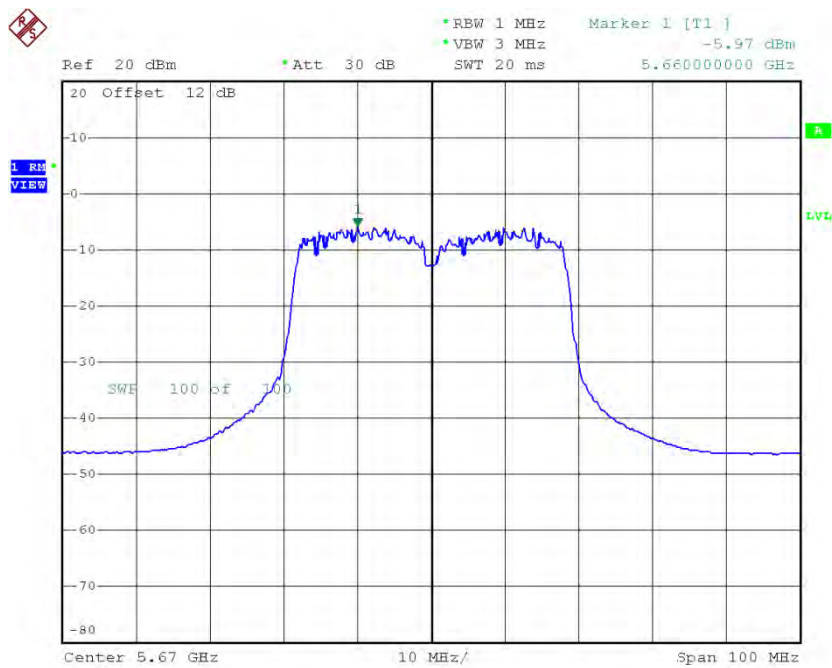CH134

Date: 29.APR.2016 16:12:53


Test Mode: UNII-2C/TX N40 Mode_CH102/CH110/CH134_ANT 3

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH102	5510	-5.01	0.55	-4.46	10.24
CH110	5550	-4.27	0.55	-3.72	10.24
CH134	5670	-6.43	0.55	-5.88	10.24




Date: 29.APR.2016 16:00:14

CH110

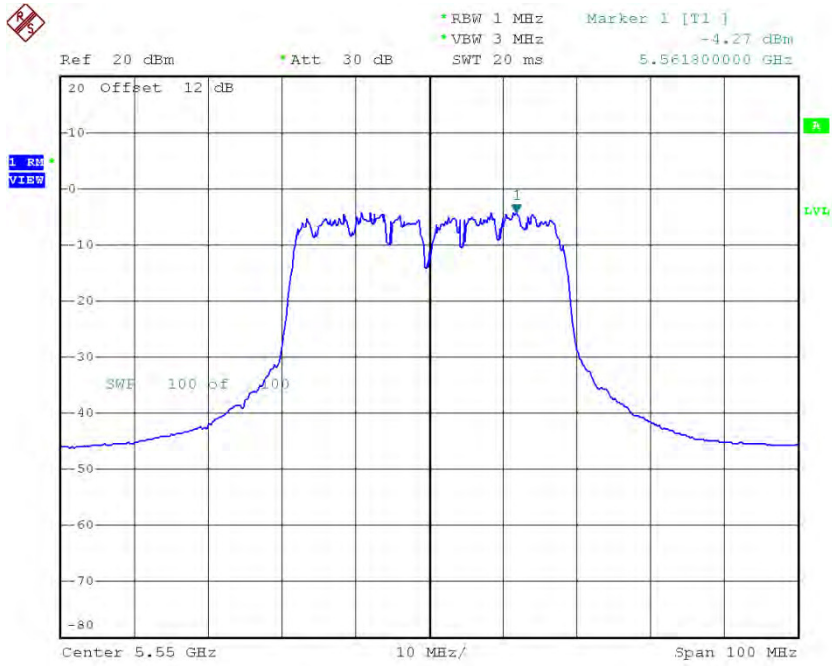

Date: 29.APR.2016 16:06:10

CH134

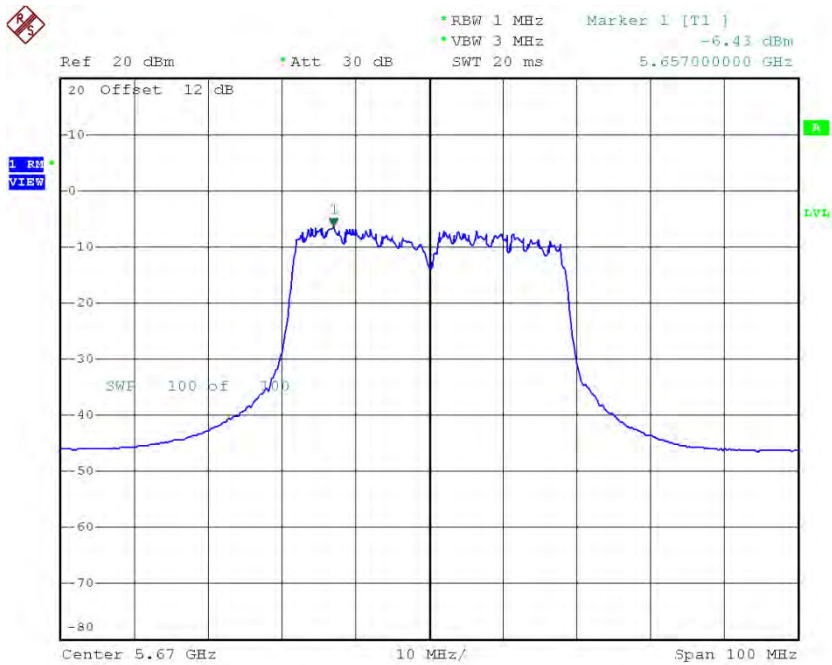


Date: 29.APR.2016 16:13:40

Test Mode: UNII-2C/TX N40 Mode_CH102/CH110/CH134_Total


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH102	5510	1.42	10.24
CH110	5550	1.79	10.24
CH134	5670	-0.26	10.24

CH60

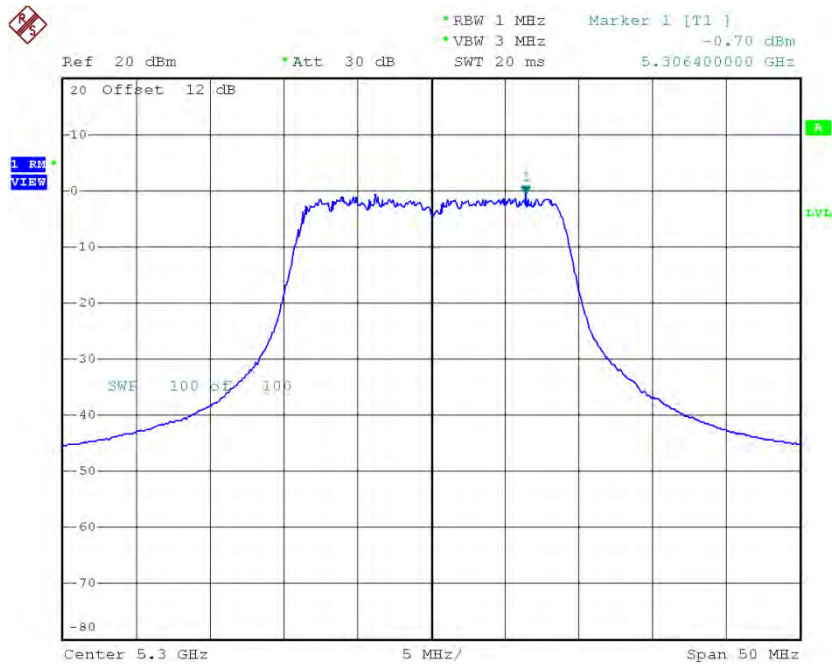

Date: 29.APR.2016 14:16:40


CH64

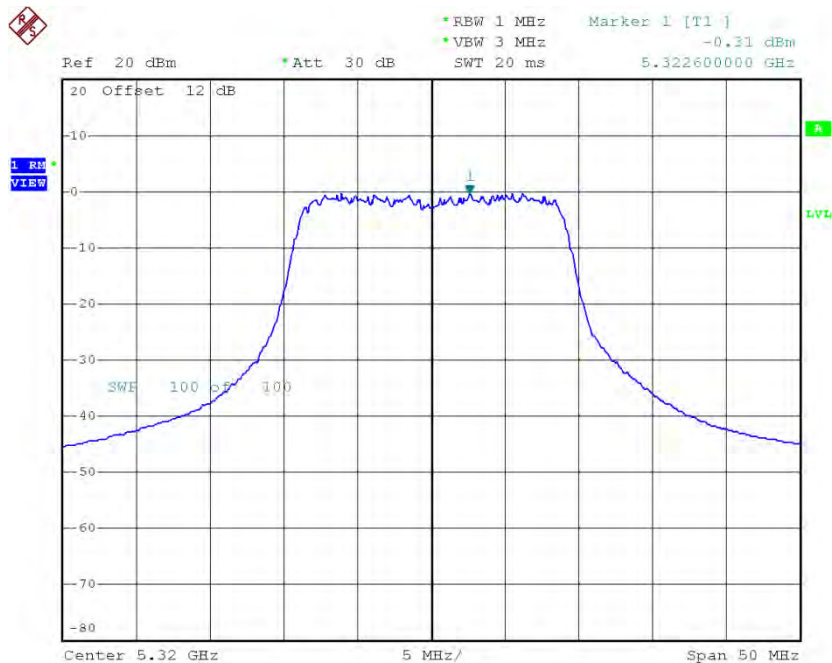


Date: 29.APR.2016 14:17:35

Test Mode: UNII-2A/TX AC20 Mode_CH52/CH60/CH64_ANT 3


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	-2.38	0.18	-2.20	10.24
CH60	5300	-0.94	0.18	-0.76	10.24
CH64	5320	-0.39	0.18	-0.21	10.24

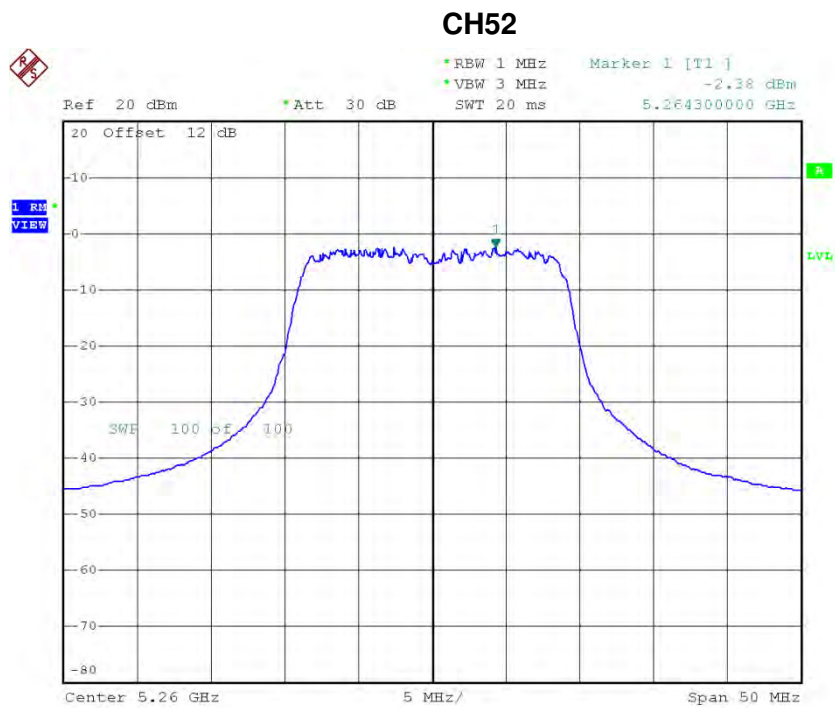

Date: 29.APR.2016 14:22:57

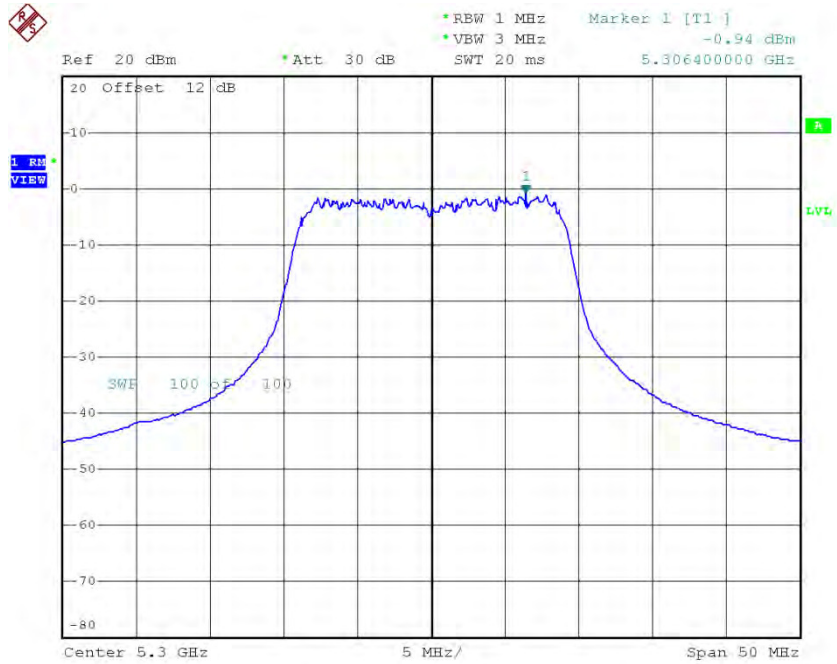CH60

Date: 29.APR.2016 14:24:11

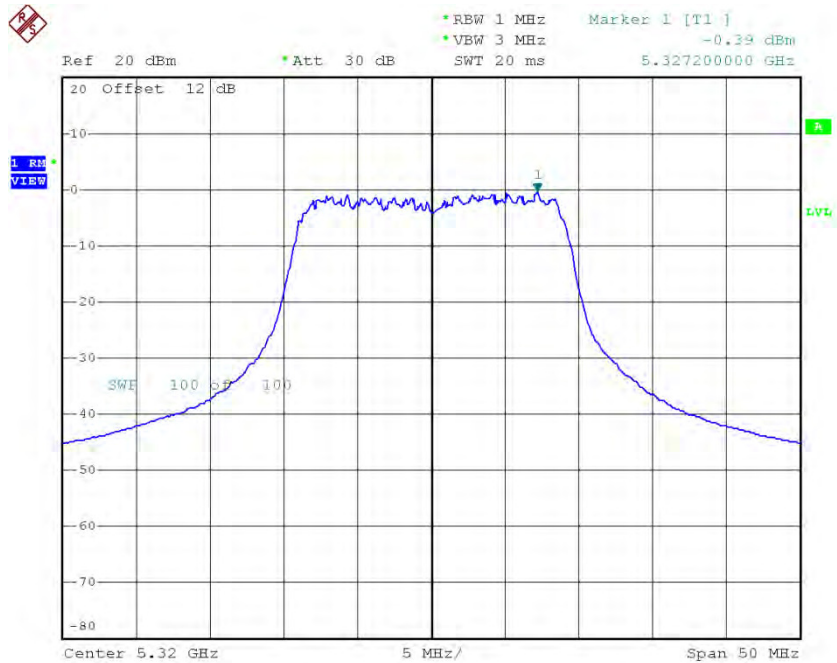CH64

Date: 29.APR.2016 14:25:09


Test Mode: UNII-2A/TX AC20 Mode_CH52/CH60/CH64_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	3.18	10.24
CH60	5300	3.55	10.24
CH64	5320	4.05	10.24

Test Mode: UNII-2A/TX AC40 Mode_CH54/CH62_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH54	5270	-6.16	0.55	-5.61	10.24
CH62	5310	-5.11	0.55	-4.56	10.24

CH54

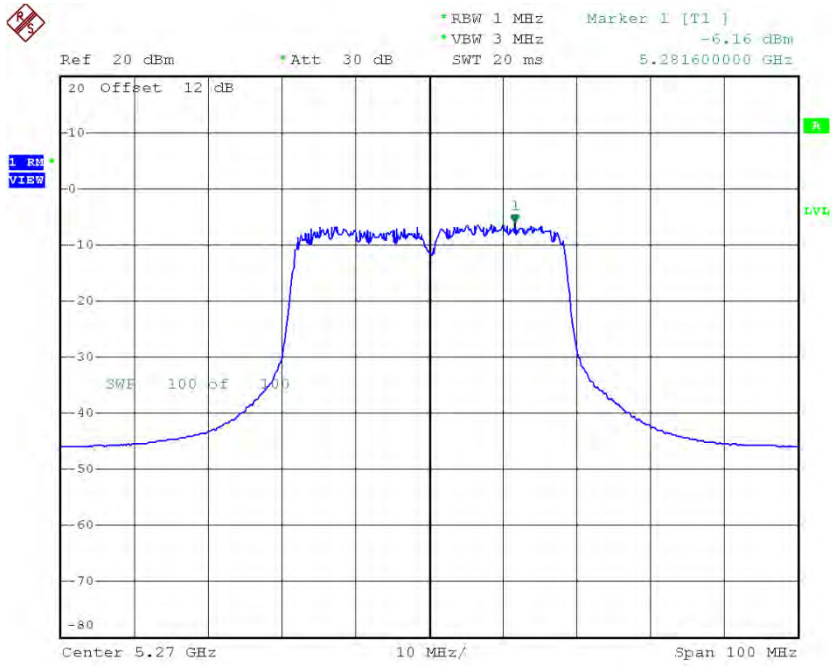

Date: 29.APR.2016 14:43:10

CH62

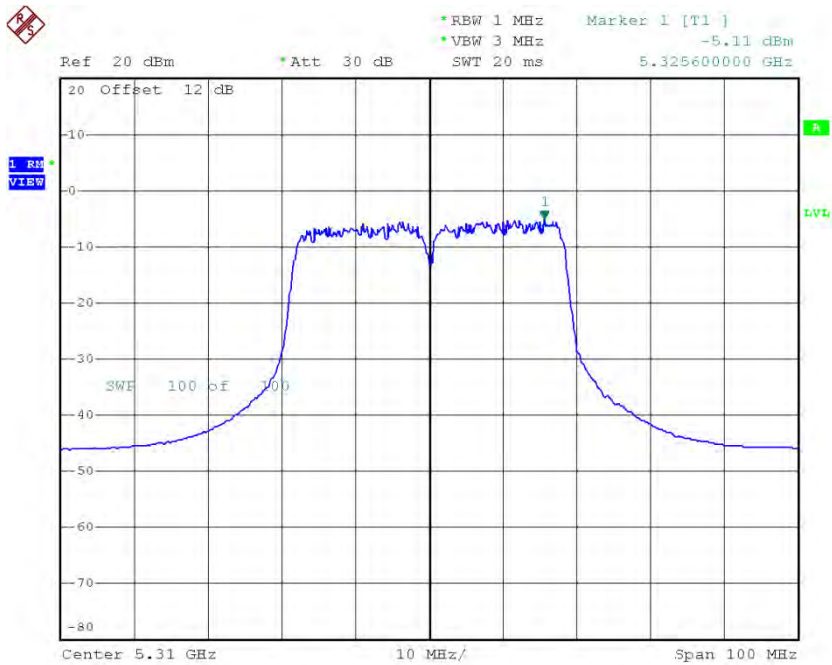

Date: 29.APR.2016 14:44:18


Test Mode: UNII-2A/TX AC40 Mode_CH54/CH62_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH54	5270	-7.26	0.55	-6.71	10.24
CH62	5310	-7.11	0.55	-6.56	10.24

Test Mode: UNII-2A/TX AC40 Mode_CH54/CH62_ANT 3


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH54	5270	-7.81	0.55	-7.26	10.24
CH62	5310	-7.93	0.55	-7.38	10.24

CH54

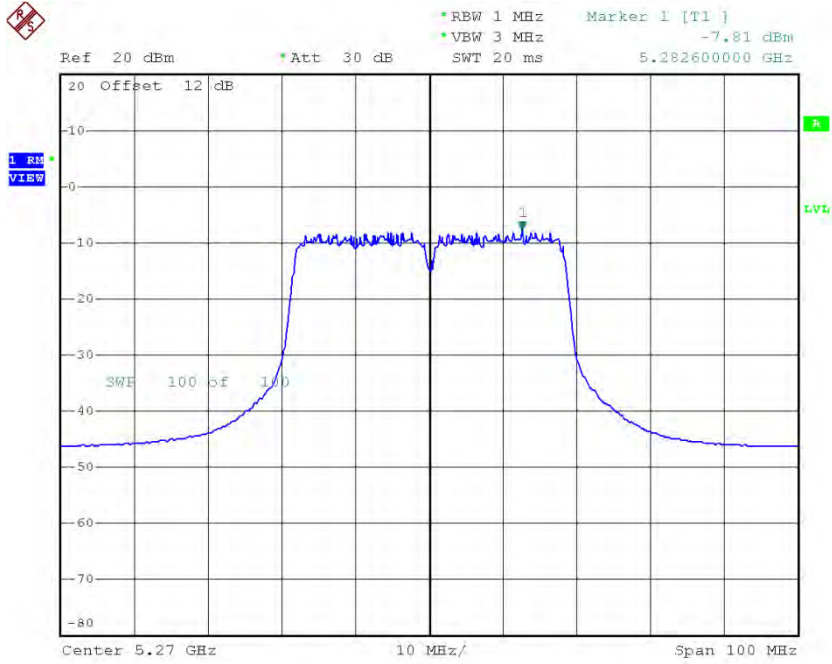

Date: 29.APR.2016 14:48:52

CH62

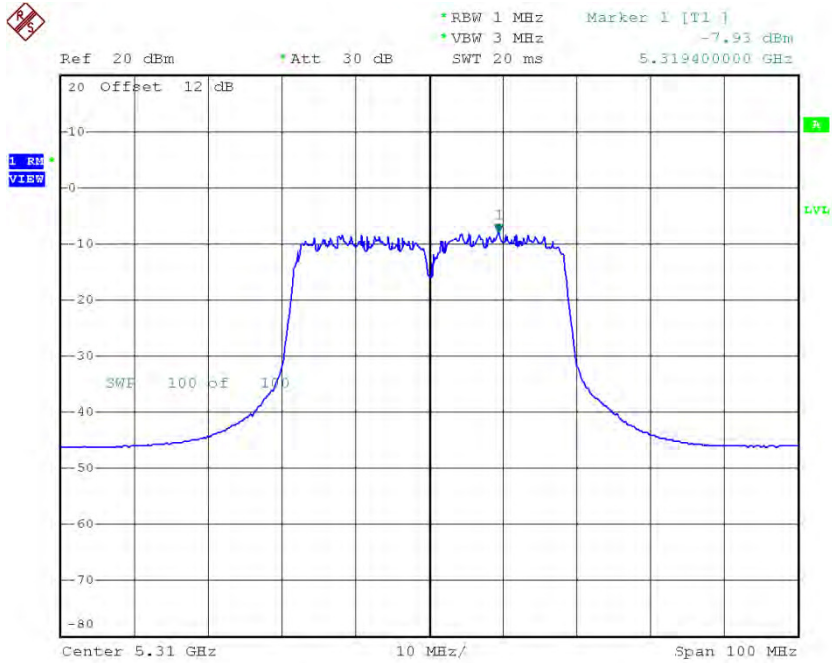


Date: 29.APR.2016 14:50:10

Test Mode: UNII-2A/TX AC40 Mode_CH54/CH62_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH54	5270	-1.70	10.24
CH62	5310	-1.23	10.24

Test Mode: UNII-2A/TX AC80 Mode_CH58_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH58	5290	-13.72	0.52	-13.20	10.24

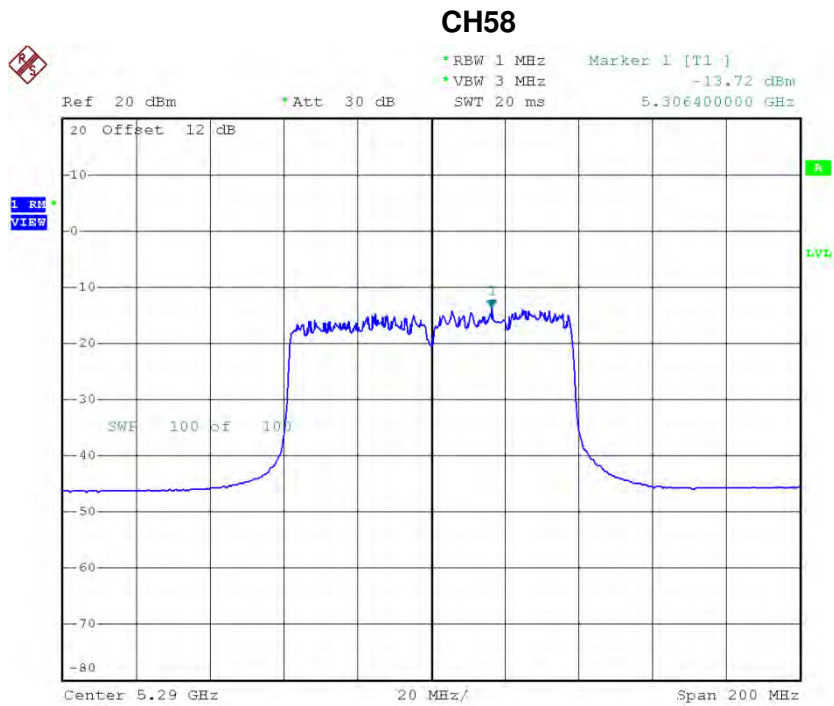

Date: 29.APR.2016 14:56:04

Test Mode: UNII-2A/TX AC80 Mode_CH58_ANT 2


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH58	5290	-15.47	0.52	-14.95	10.24

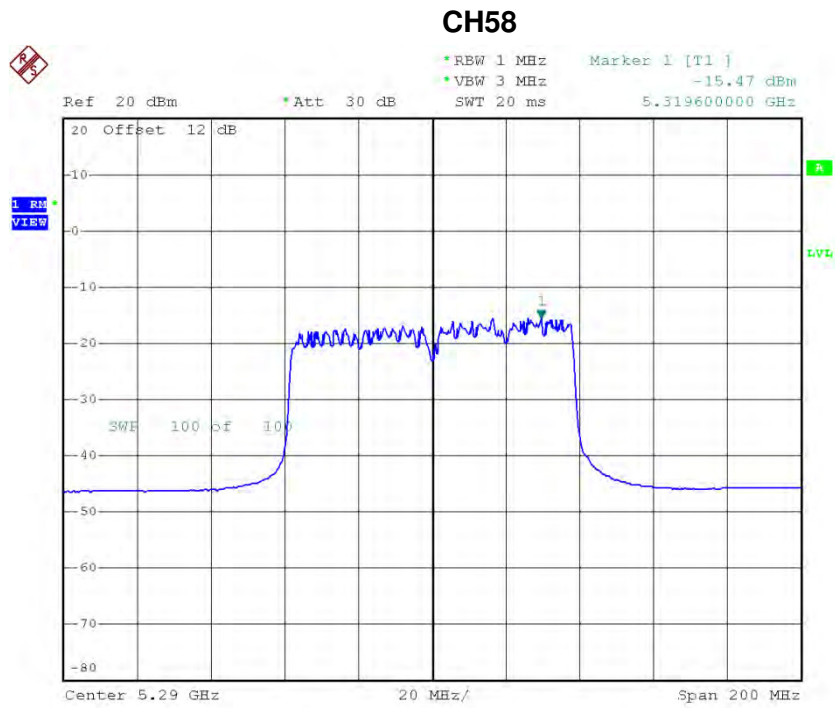

Date: 29.APR.2016 14:54:56

Test Mode: UNII-2A/TX AC80 Mode_CH58_ANT 3

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH58	5290	-15.76	0.52	-15.24	10.24

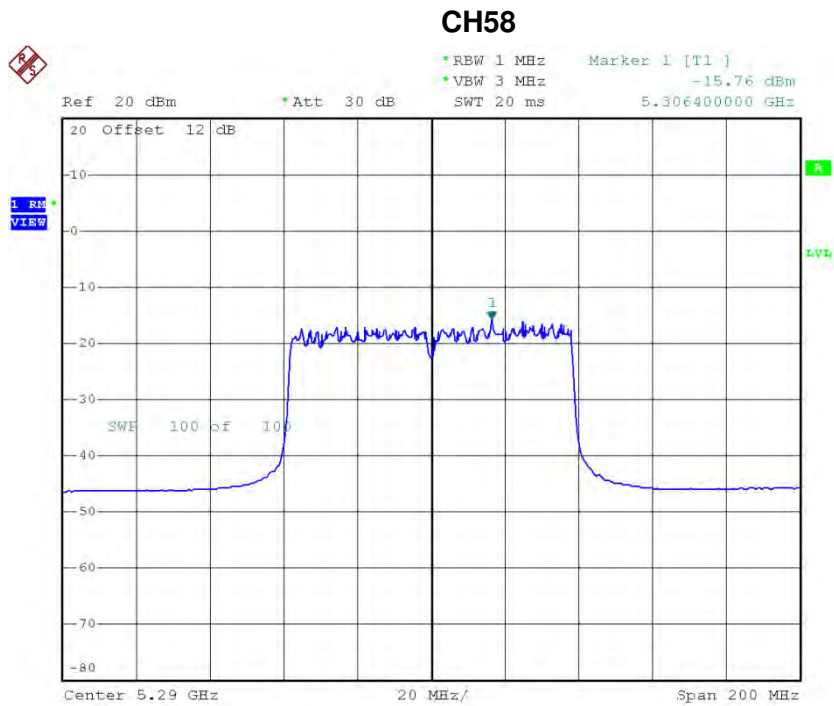

Date: 29.APR.2016 14:53:29


Test Mode: UNII-2A/TX AC80 Mode_CH58_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH58	5290	-9.60	10.24

Test Mode: UNII-2C/TX AC20 Mode_CH100/CH116/CH140_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH100	5500	2.93	0.18	3.11	10.24
CH116	5580	1.25	0.18	1.43	10.24
CH140	5700	-0.99	0.18	-0.81	10.24

CH100

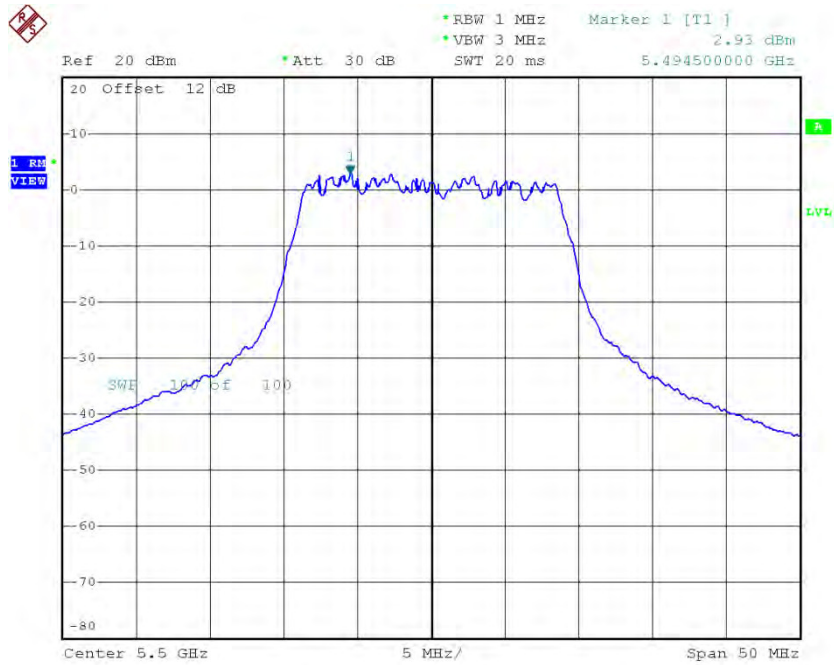


Date: 29.APR.2016 15:41:07

CH116

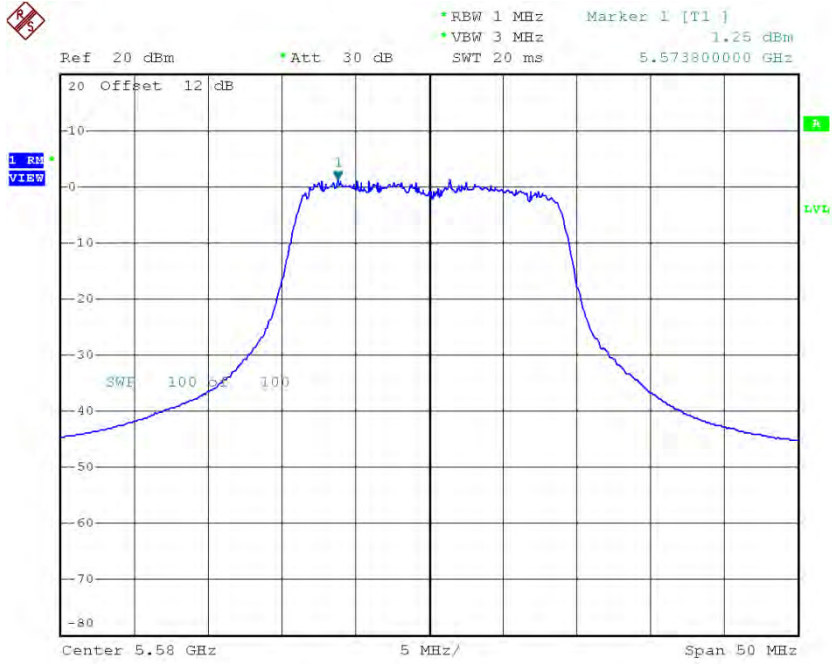

Date: 29.APR.2016 15:42:20

CH140

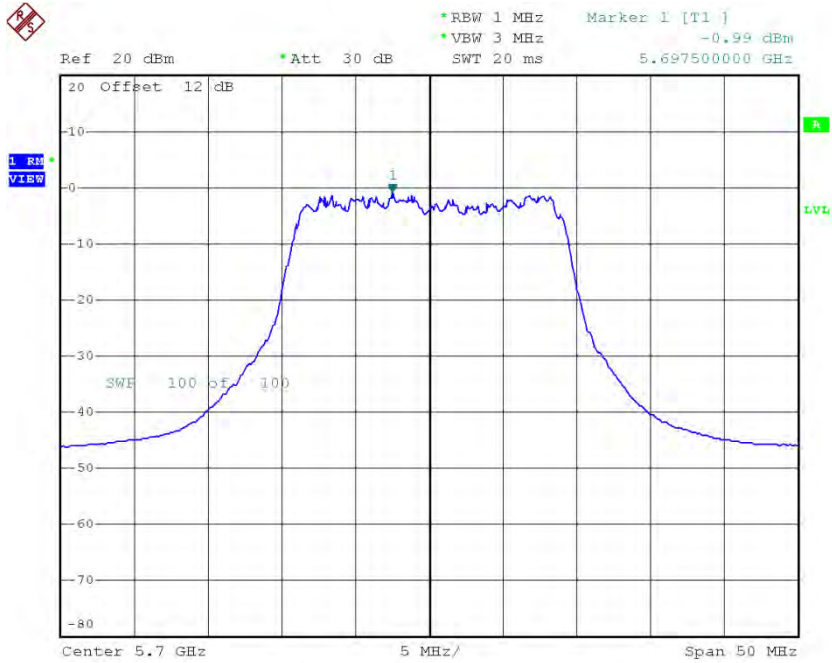


Date: 29.APR.2016 15:47:17


Test Mode: UNII-2C/TX AC20 Mode_CH100/CH116/CH140_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH100	5500	-1.68	0.18	-1.50	10.24
CH116	5580	-1.59	0.18	-1.41	10.24
CH140	5700	-2.88	0.18	-2.70	10.24


CH100

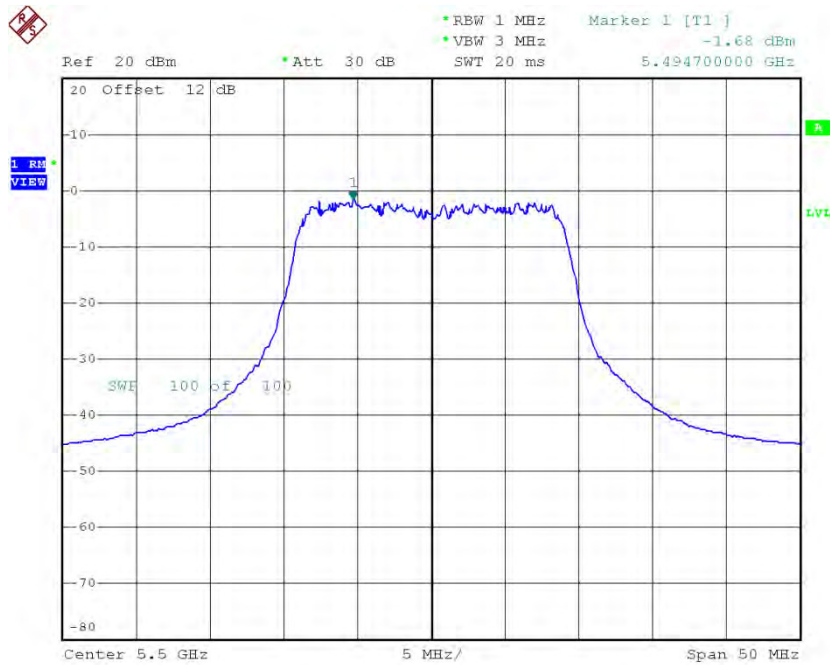

Date: 29.APR.2016 15:40:04

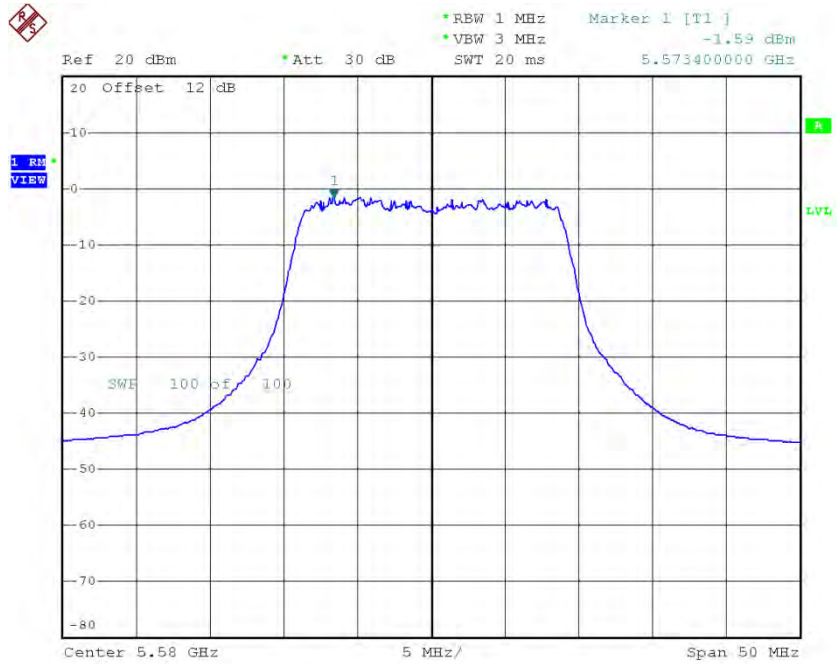CH116

Date: 29.APR.2016 15:42:58

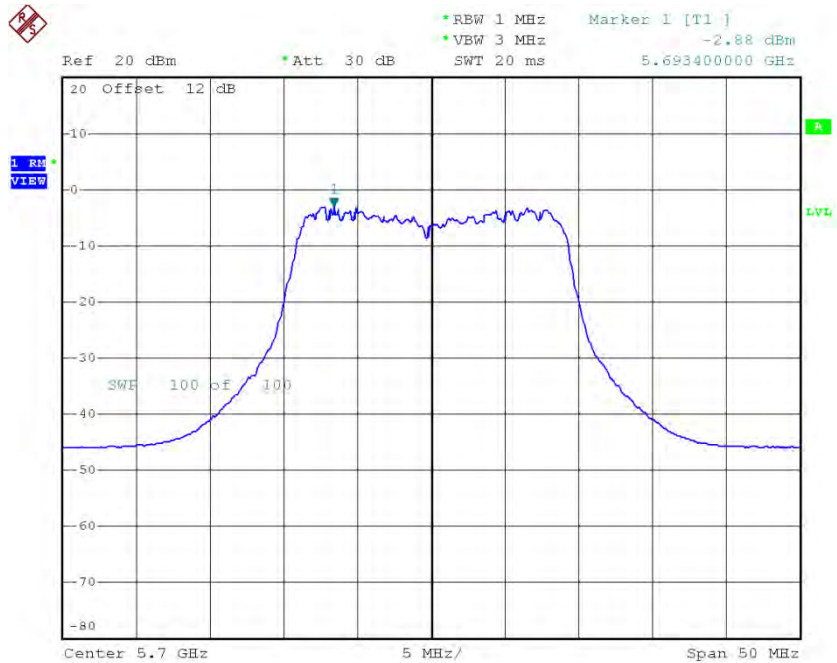
CH140

Date: 29.APR.2016 15:46:26

Test Mode: UNII-2C/TX AC20 Mode_CH100/CH116/CH140_ANT 3


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH100	5500	-0.57	0.18	-0.39	10.24
CH116	5580	0.40	0.18	0.58	10.24
CH140	5700	-1.60	0.18	-1.42	10.24

CH100

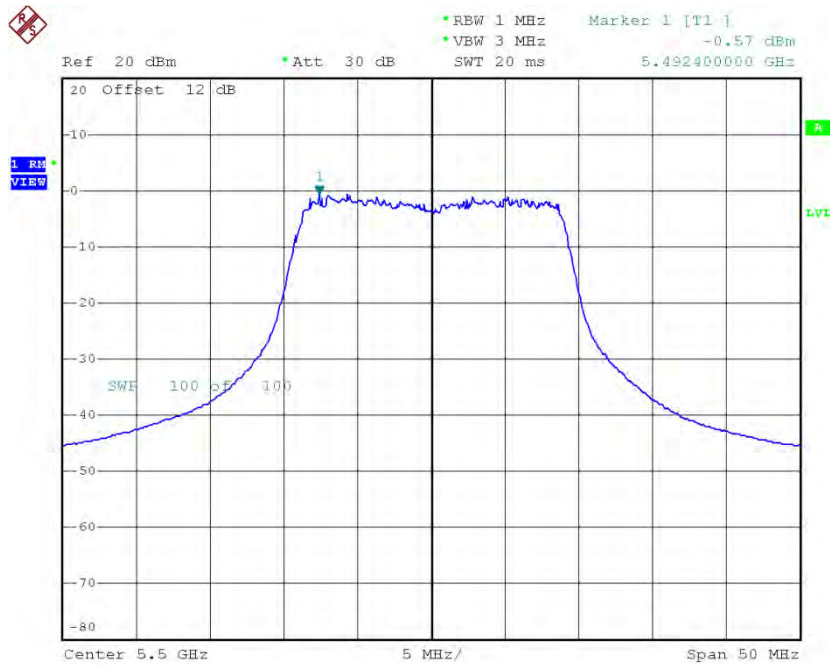


Date: 29.APR.2016 15:38:59

CH116

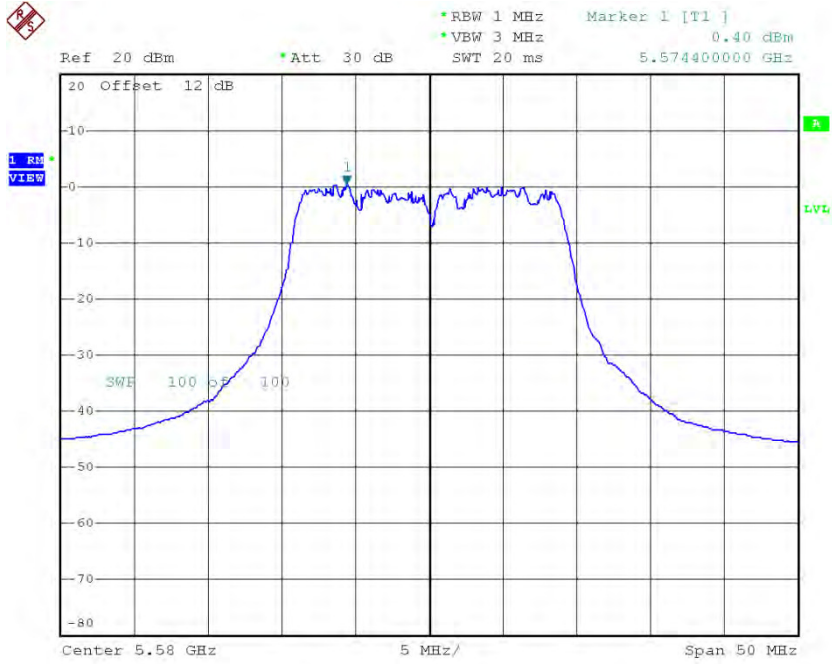

Date: 29.APR.2016 15:43:38

CH140

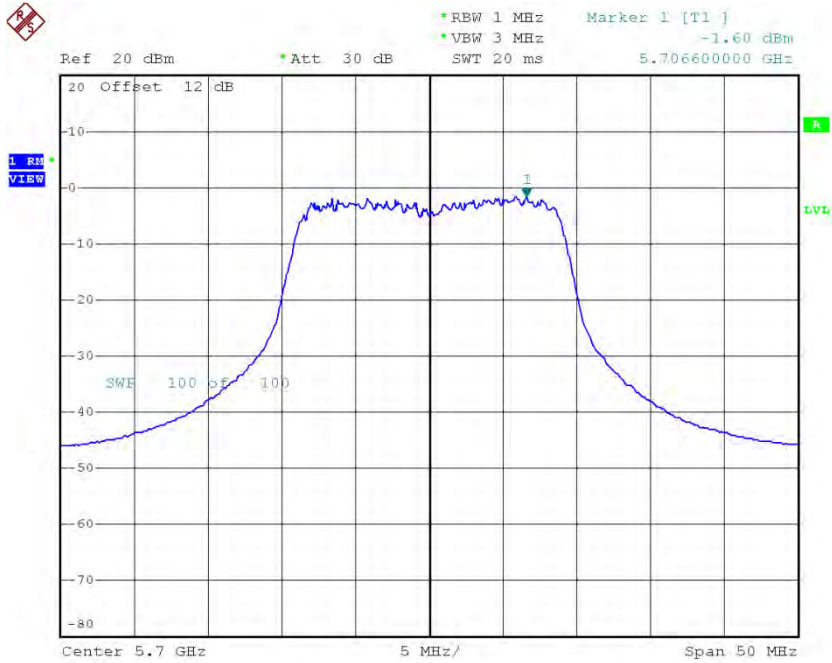

Date: 29.APR.2016 15:44:30


Test Mode: UNII-2C/TX AC20 Mode_CH100/CH116/CH140_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH100	5500	5.64	10.24
CH116	5580	5.12	10.24
CH140	5700	3.20	10.24

Test Mode: UNII-2C/TX AC40 Mode_CH102/CH110/CH134_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH102	5510	-1.79	0.55	-1.24	10.24
CH110	5550	-1.97	0.55	-1.42	10.24
CH134	5670	-4.01	0.55	-3.46	10.24

CH102

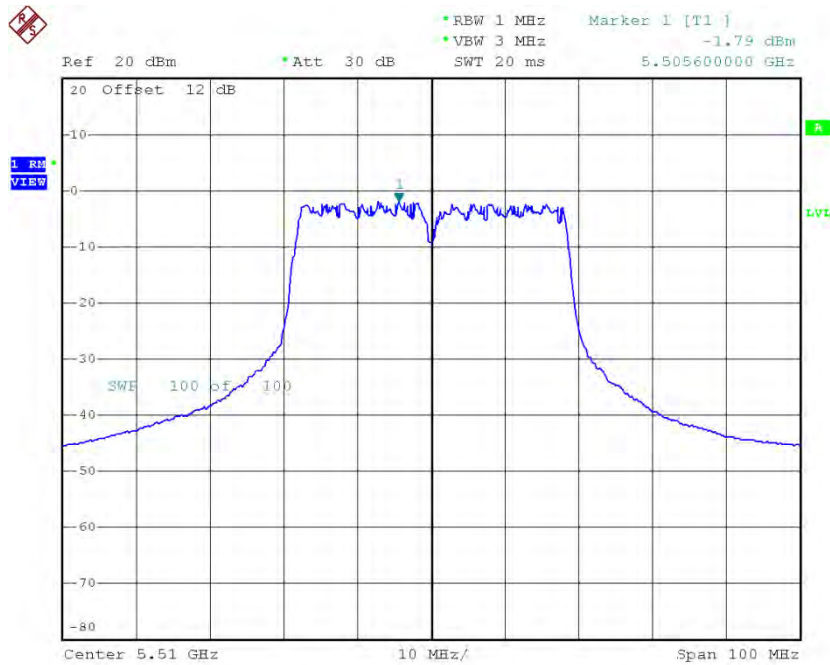


Date: 29.APR.2016 16:20:05

CH110

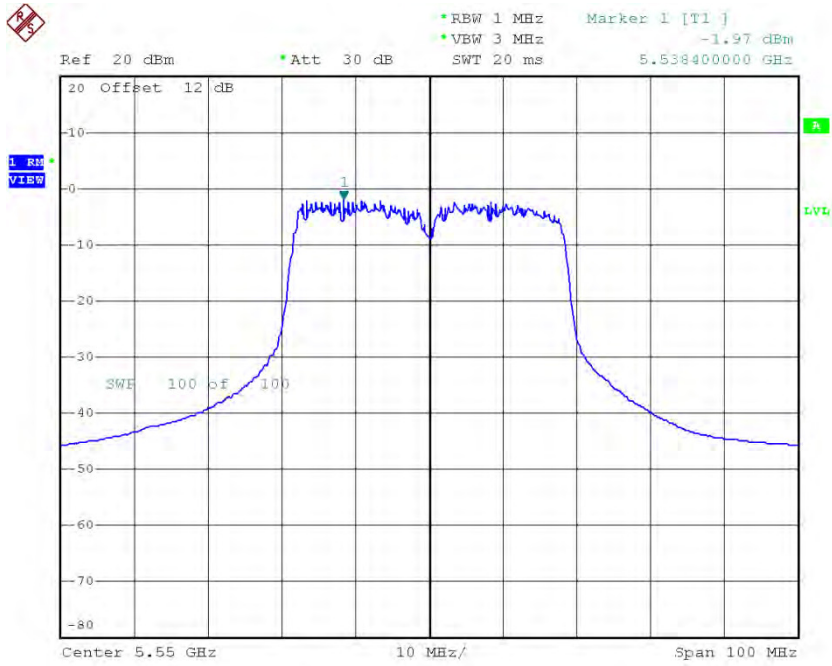

Date: 29.APR.2016 16:30:27

CH134

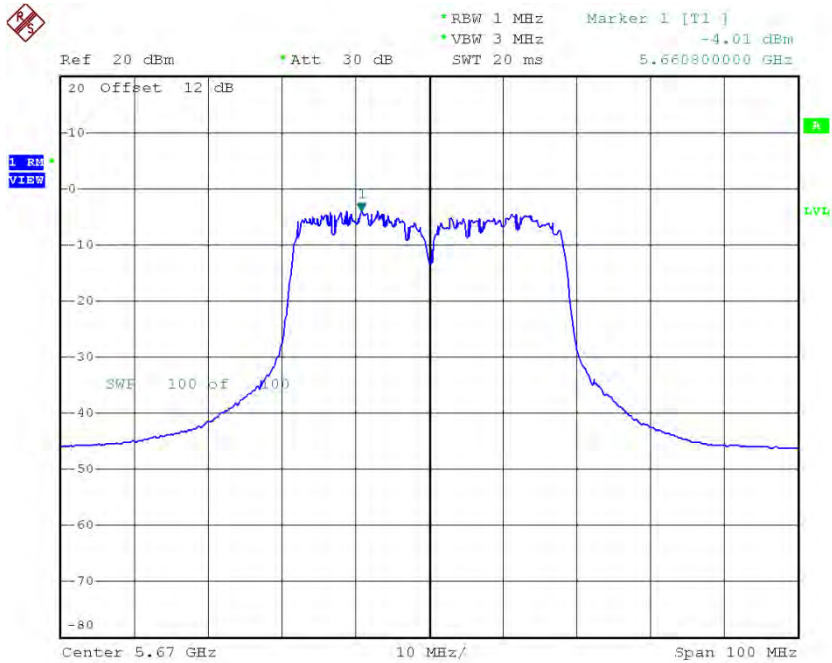


Date: 29.APR.2016 16:35:12

Test Mode: UNII-2C/TX AC40 Mode_CH102/CH110/CH134_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH102	5510	-5.66	0.55	-5.11	10.24
CH110	5550	-5.60	0.55	-5.05	10.24
CH134	5670	-6.40	0.55	-5.85	10.24

CH102

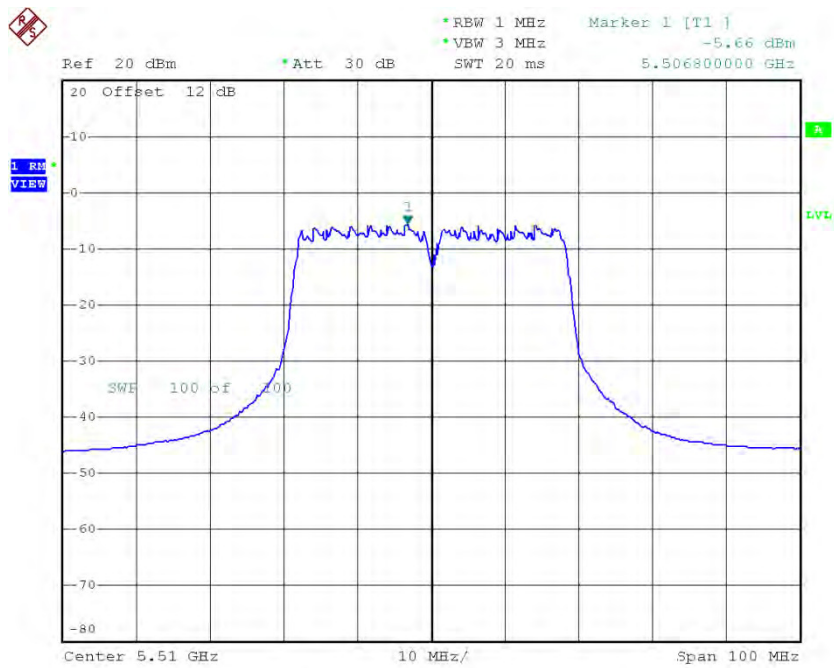


Date: 29.APR.2016 16:18:59

Test Mode: UNII-2C/TX AC40 Mode_CH102/CH110/CH134_ANT 3


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH102	5510	-5.00	0.55	-4.45	10.24
CH110	5550	-4.35	0.55	-3.80	10.24
CH134	5670	-6.77	0.55	-6.22	10.24

CH102

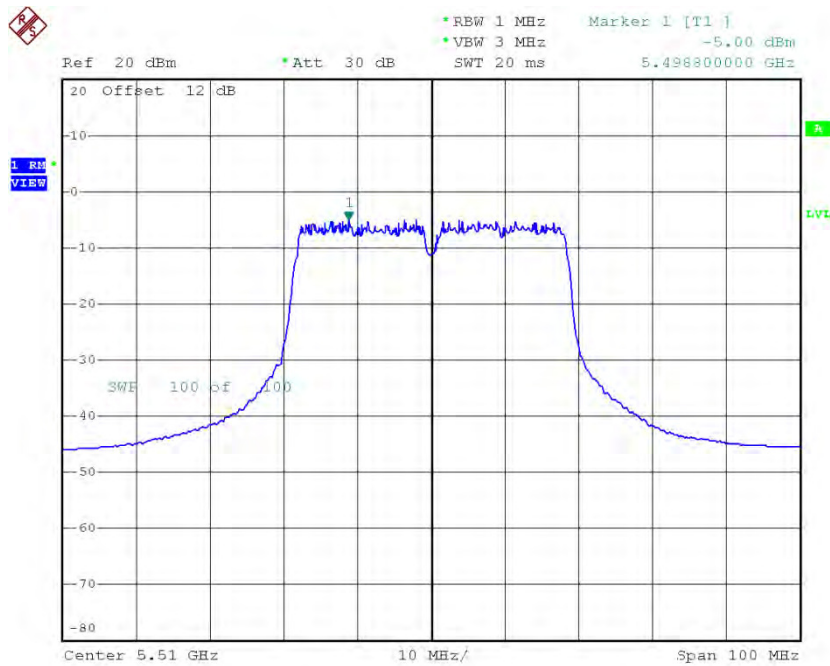


Date: 29.APR.2016 16:17:55

CH110

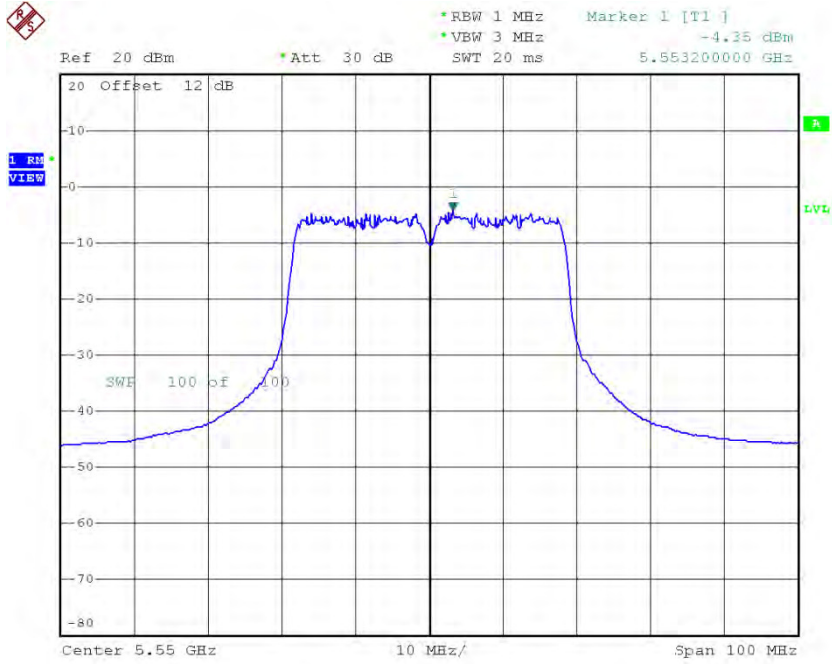

Date: 29.APR.2016 16:31:50

CH134

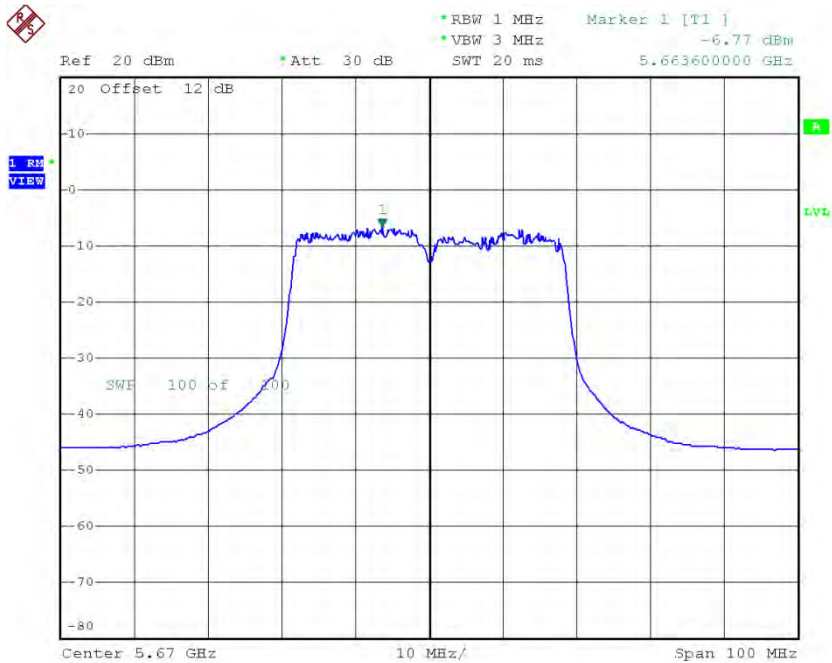

Date: 29.APR.2016 16:33:01


Test Mode: UNII-2C/TX AC40 Mode_CH102/CH110/CH134_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH102	5510	1.52	10.24
CH110	5550	1.61	10.24
CH134	5670	-0.23	10.24

Test Mode: UNII-2C/TX AC80 Mode_CH106/CH122_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH106	5530	-10.40	0.52	-9.88	10.24
CH122	5610	-10.96	0.52	-10.44	10.24

CH106

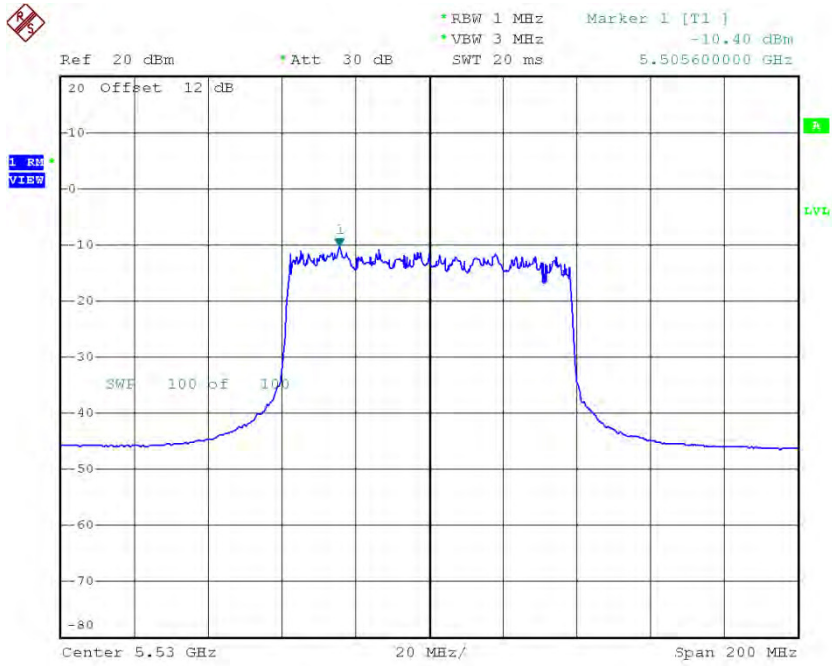

Date: 29.APR.2016 16:38:22

CH122

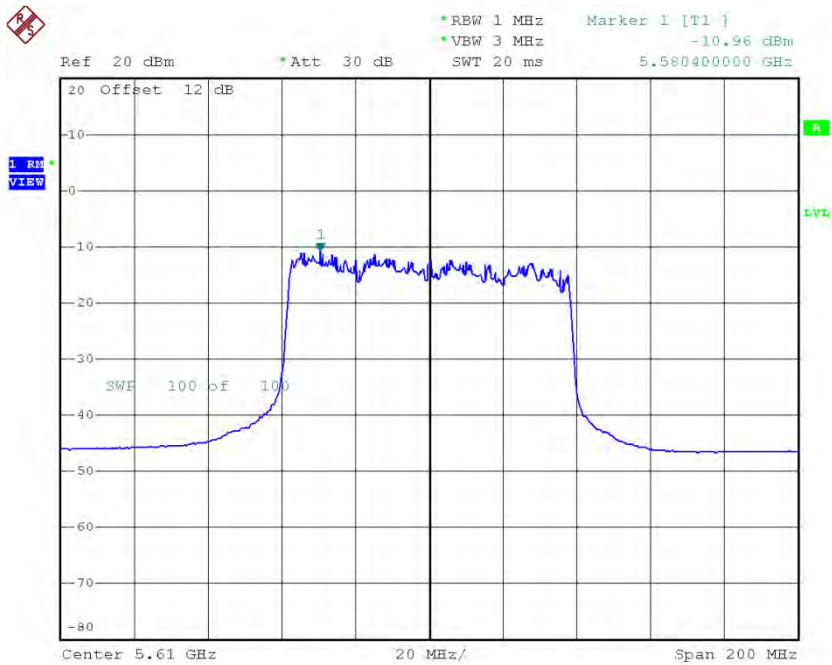


Date: 29.APR.2016 16:45:15

Test Mode: UNII-2C/TX AC80 Mode_CH106/CH122_ANT 2


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH106	5530	-14.48	0.52	-13.96	10.24
CH122	5610	-14.17	0.52	-13.65	10.24

CH106

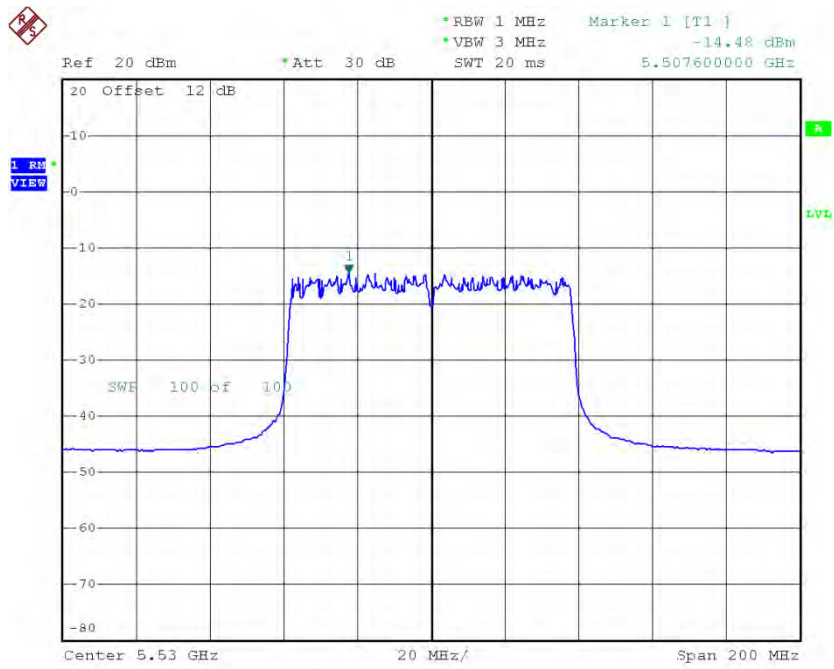

Date: 29.APR.2016 16:39:35

CH122

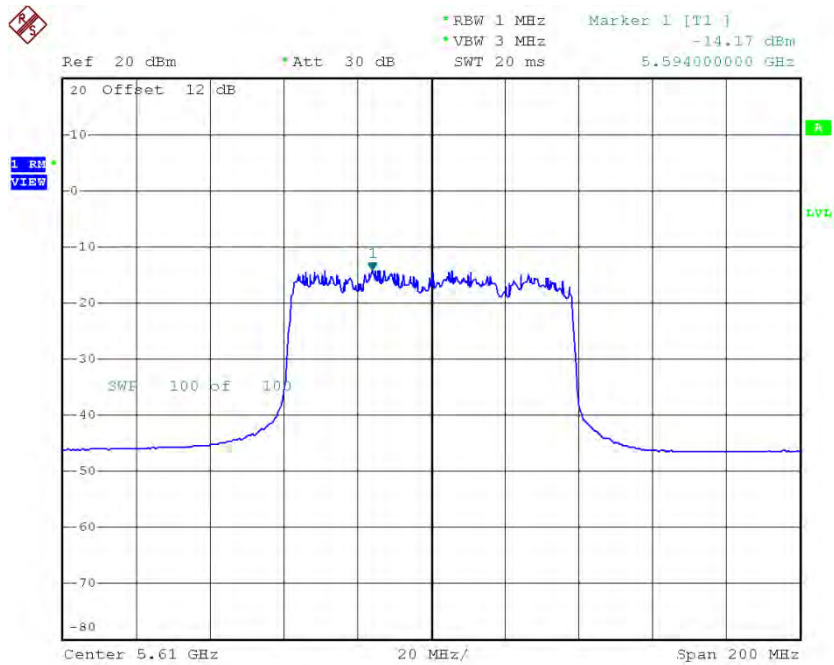


Date: 29.APR.2016 16:43:54

Test Mode: UNII-2C/TX AC80 Mode_CH106/CH122_ANT 3


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH106	5530	-13.96	0.52	-13.44	10.24
CH122	5610	-11.08	0.52	-10.56	10.24

CH106

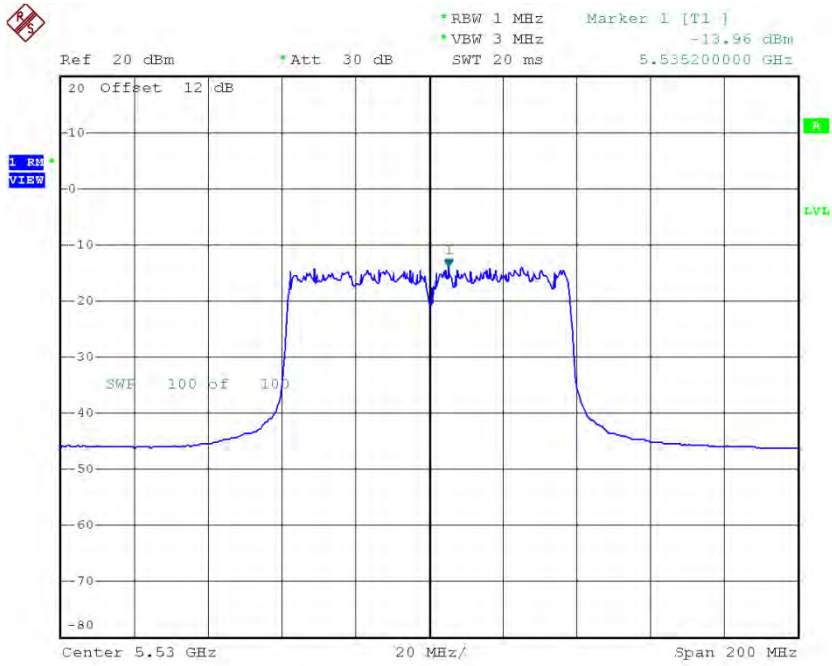

Date: 29.APR.2016 16:40:58

CH122

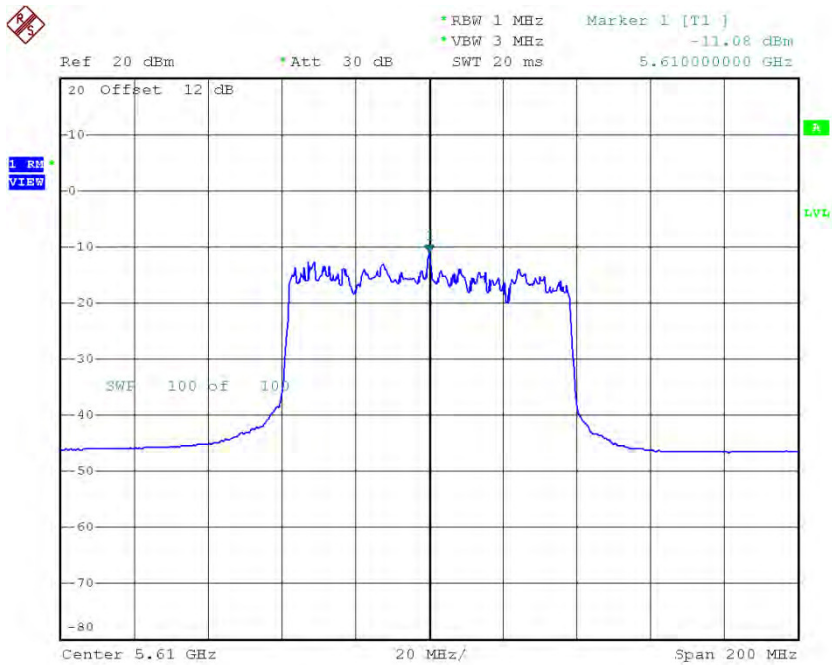

Date: 29.APR.2016 16:42:25

Test Mode: UNII-2C/TX AC80 Mode_CH106/CH122_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH106	5530	-7.25	10.24
CH122	5610	-6.55	10.24

ATTACHMENT H - FREQUENCY STABILITY

Test Mode:	UNII-2A
-------------------	----------------

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5260.0000
132	5260.0799
120	5260.0750
108	5260.0600
Max. Deviation (MHz)	0.0799
Max. Deviation (ppm)	15.1877

Temperature vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(°C)	5260.0000
-5	5260.0550
5	5260.0600
15	5260.0799
25	5260.0800
35	5260.0750
45	5260.0600
50	5260.0399
Max. Deviation (MHz)	0.0800
Max. Deviation (ppm)	15.2067

Test Mode:	UNII-2C
-------------------	----------------

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5500.0000
132	5500.0599
120	5500.0800
108	5500.0800
Max. Deviation (MHz)	0.0800
Max. Deviation (ppm)	14.5432

Temperature vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(°C)	5500.0000
-5	5500.0751
5	5500.0800
15	5500.0751
25	5500.0702
35	5500.0800
45	5500.0950
50	5500.0800
Max. Deviation (MHz)	0.0950
Max. Deviation (ppm)	17.2750