


Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5300MHz


**Vertical**

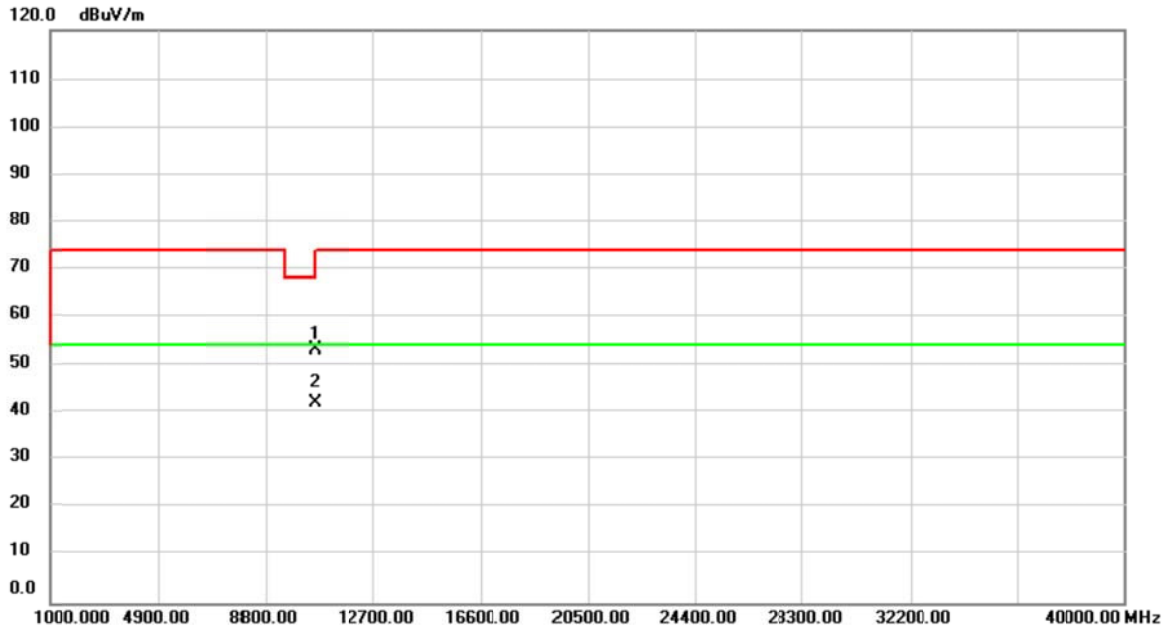

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10600.10	49.91	3.42	53.33	74.00	-20.67	peak	
2	*	10600.10	38.62	3.42	42.04	54.00	-11.96	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5300MHz


### Horizontal

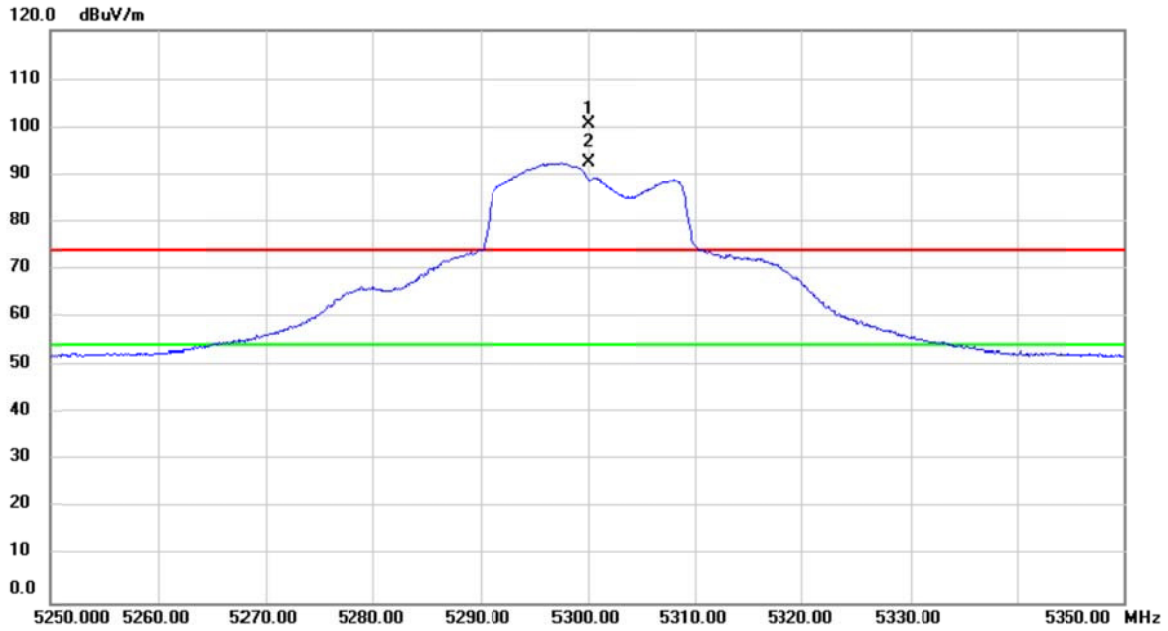

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5300.000	61.96	38.63	100.59	74.00	26.59	peak	No Limit
2	*	5300.000	53.78	38.63	92.41	54.00	38.41	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5300MHz


**Horizontal**

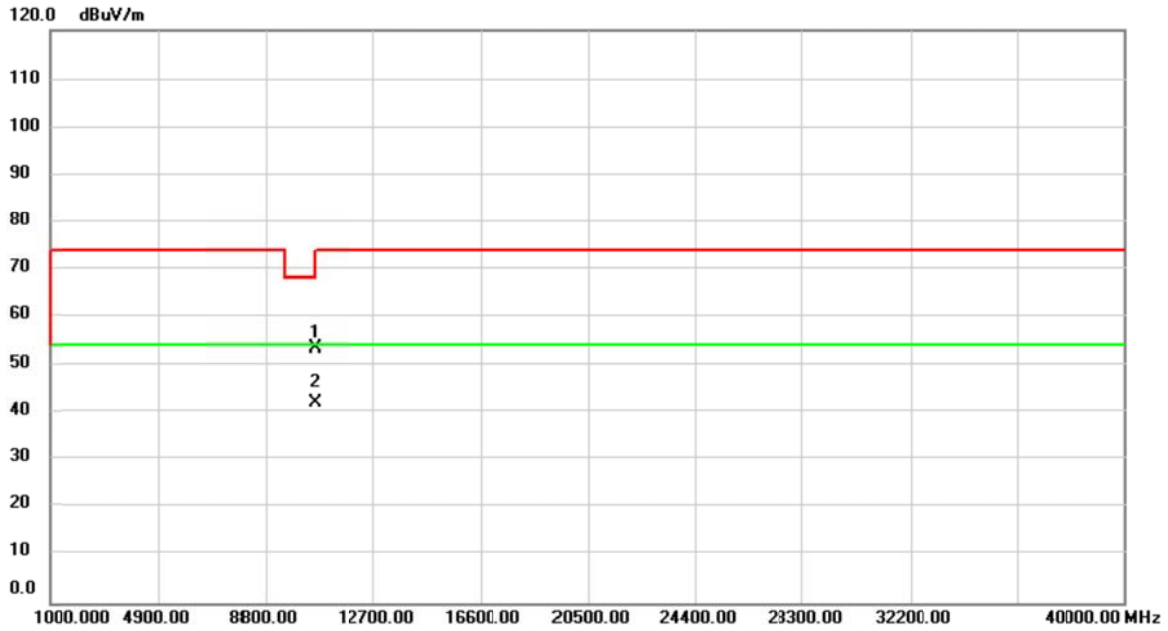

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10600.10	50.21	3.42	53.63	74.00	-20.37	peak	
2	*	10600.10	38.62	3.42	42.04	54.00	-11.96	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5320MHz


**Vertical**

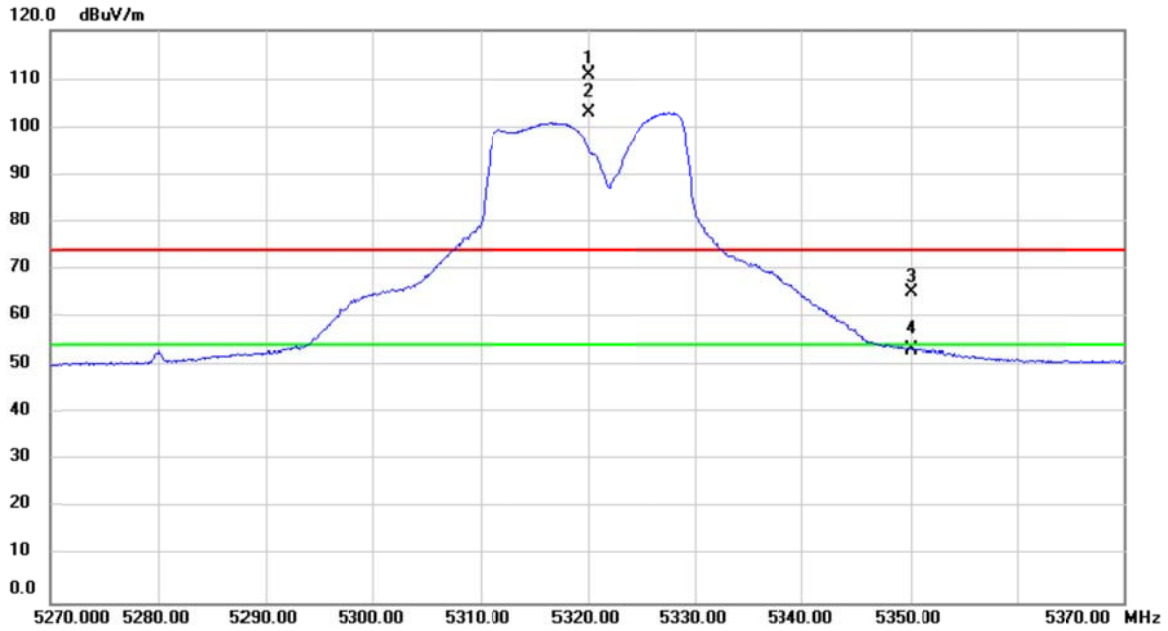

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5320.000	72.09	38.66	110.75	74.00	36.75	peak	No Limit
2	*	5320.000	64.34	38.66	103.00	54.00	49.00	AVG	No Limit
3		5350.000	26.68	38.69	65.37	74.00	-8.63	peak	
4		5350.000	14.70	38.69	53.39	54.00	-0.61	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5320MHz


### Vertical

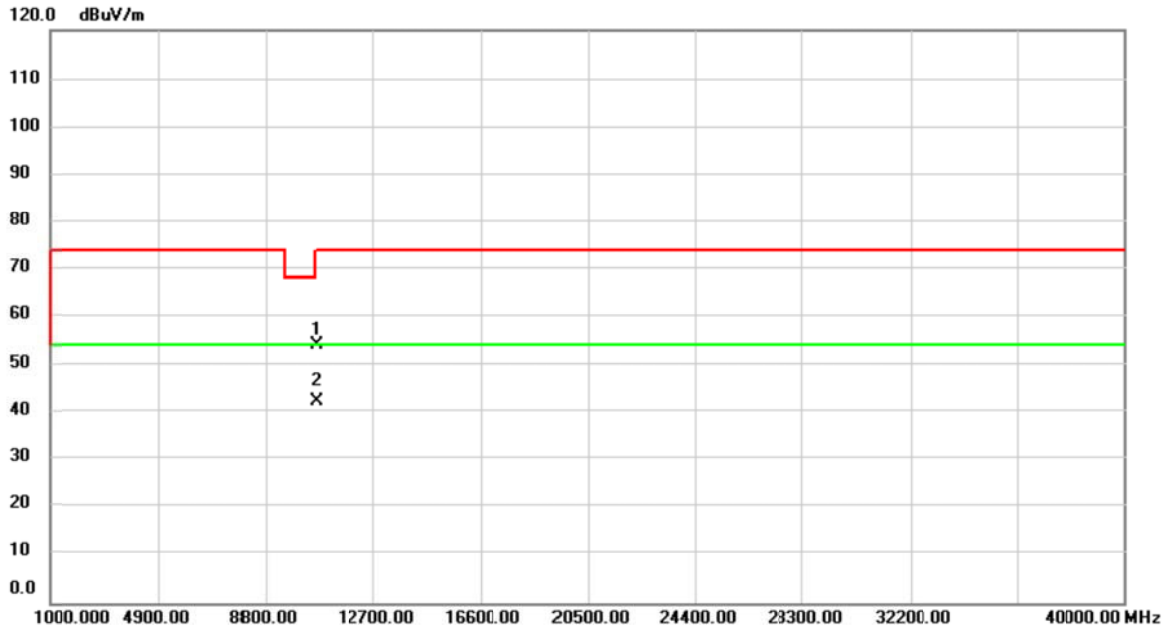

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10640.00	50.57	3.51	54.08	74.00	-19.92	peak	
2	*	10640.00	39.04	3.51	42.55	54.00	-11.45	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5320MHz


### Horizontal

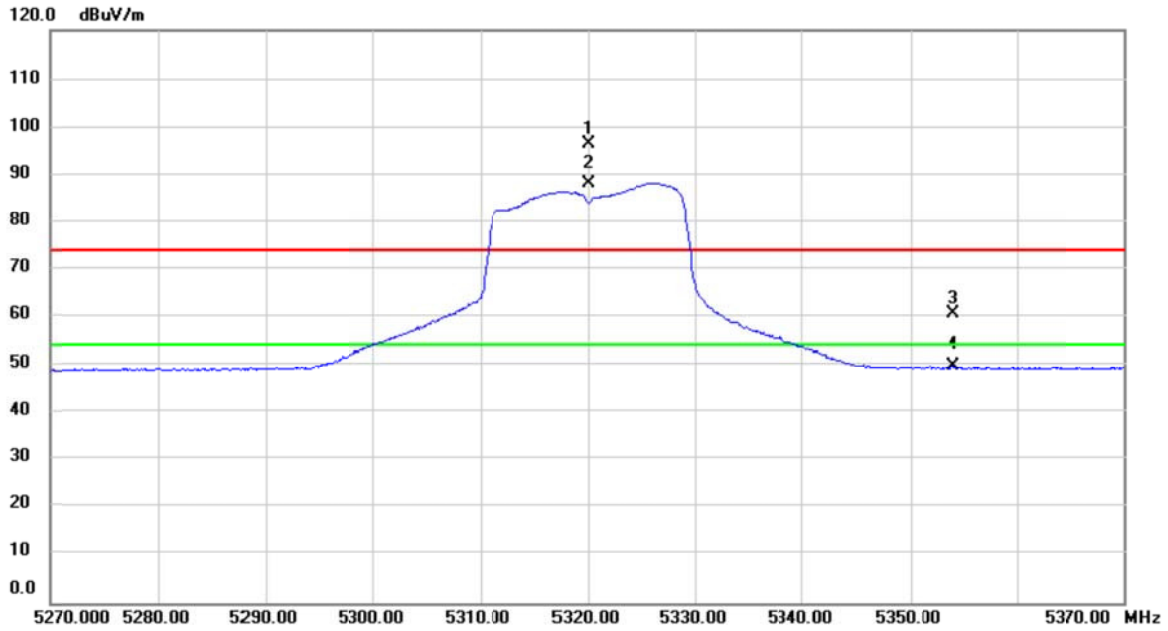

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5320.000	57.85	38.66	96.51	74.00	22.51	peak	No Limit
2	*	5320.000	49.46	38.66	88.12	54.00	34.12	AVG	No Limit
3		5354.000	22.09	38.69	60.78	74.00	-13.22	peak	
4		5354.000	11.29	38.69	49.98	54.00	-4.02	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5320MHz


### Horizontal

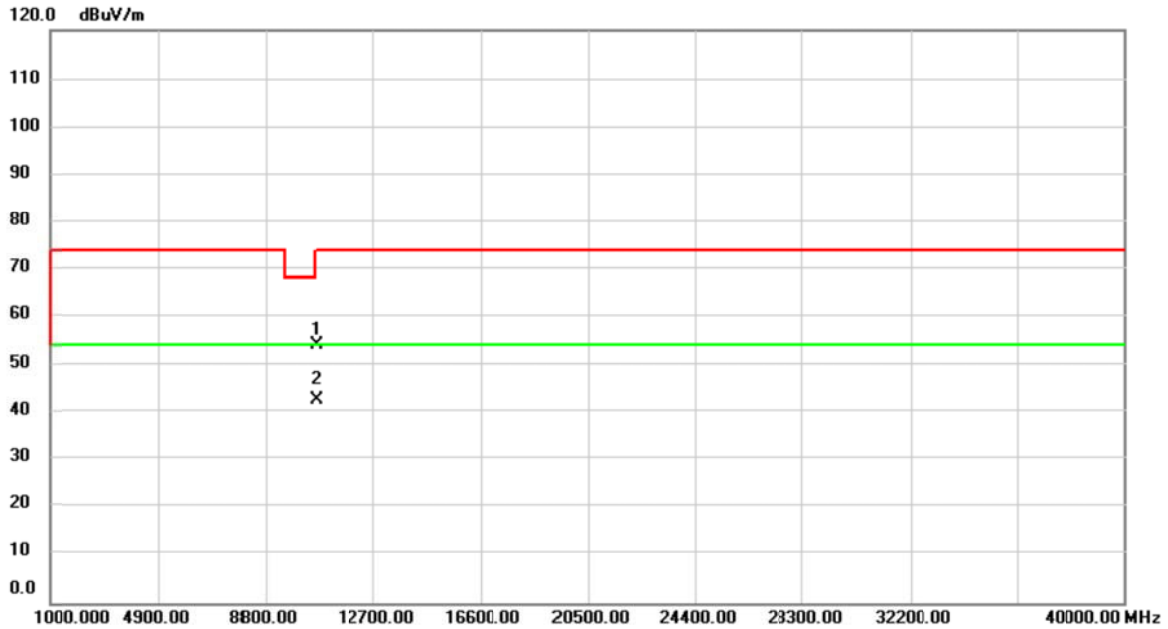

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10640.00	50.72	3.51	54.23	74.00	-19.77	peak	
2	*	10640.00	39.22	3.51	42.73	54.00	-11.27	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5270MHz

### Vertical

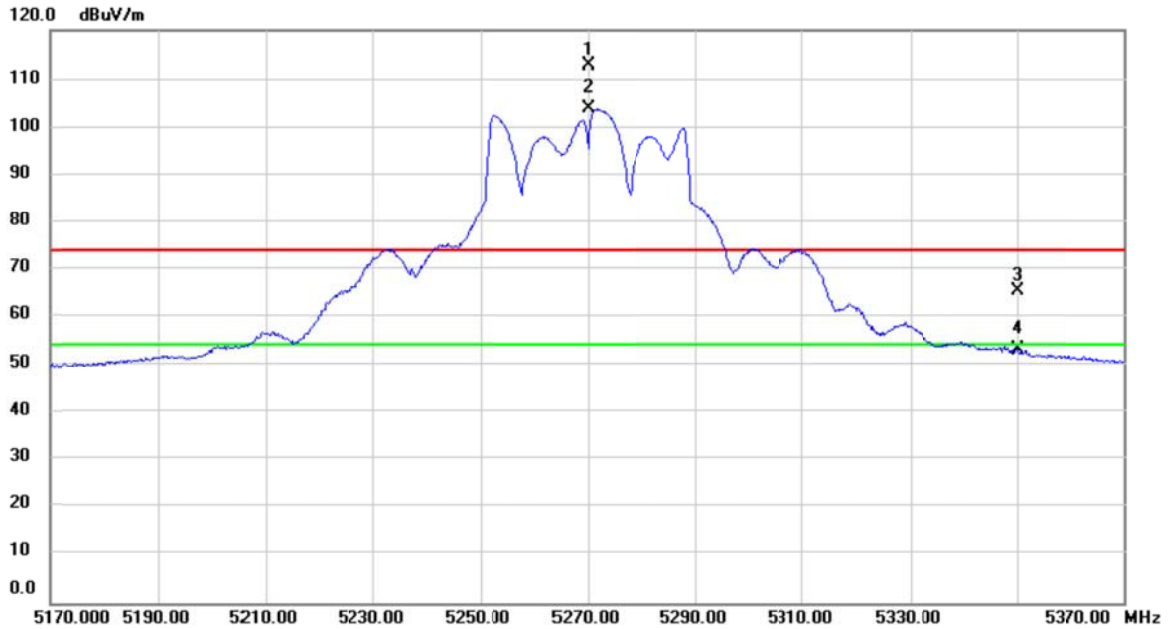


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5270.000	74.03	38.60	112.63	74.00	38.63	peak	No Limit
2	*	5270.000	65.25	38.60	103.85	54.00	49.85	AVG	No Limit
3		5350.000	26.84	38.69	65.53	74.00	-8.47	peak	
4		5350.000	14.43	38.69	53.12	54.00	-0.88	AVG	



Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5270MHz


**Vertical**

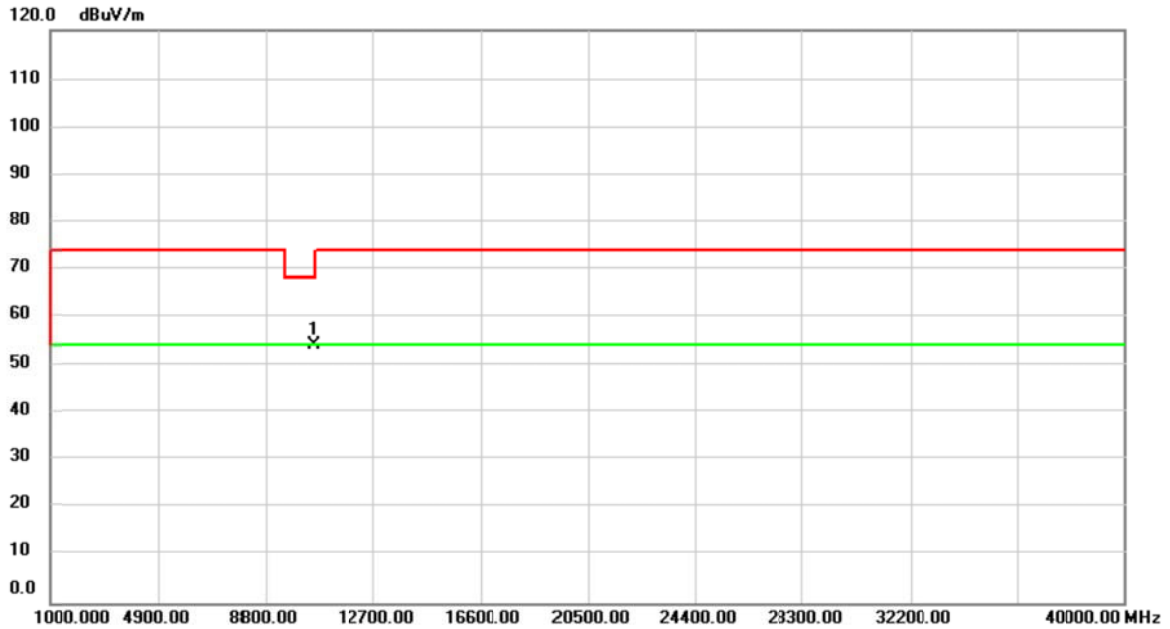

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10540.00	50.98	3.29	54.27	68.20	-13.93	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5270MHz


### Horizontal

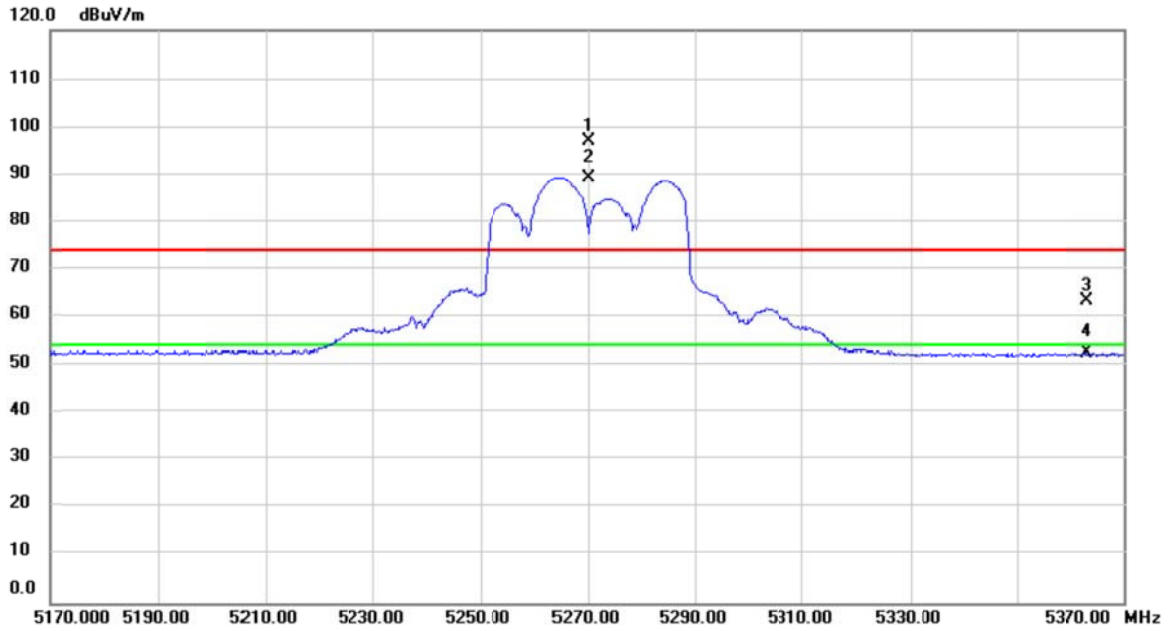

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5270.000	58.45	38.60	97.05	74.00	23.05	peak	No Limit
2	*	5270.000	50.74	38.60	89.34	54.00	35.34	AVG	No Limit
3		5363.080	24.68	38.71	63.39	74.00	-10.61	peak	
4		5363.080	14.09	38.71	52.80	54.00	-1.20	AVG	


Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5270MHz

### Horizontal

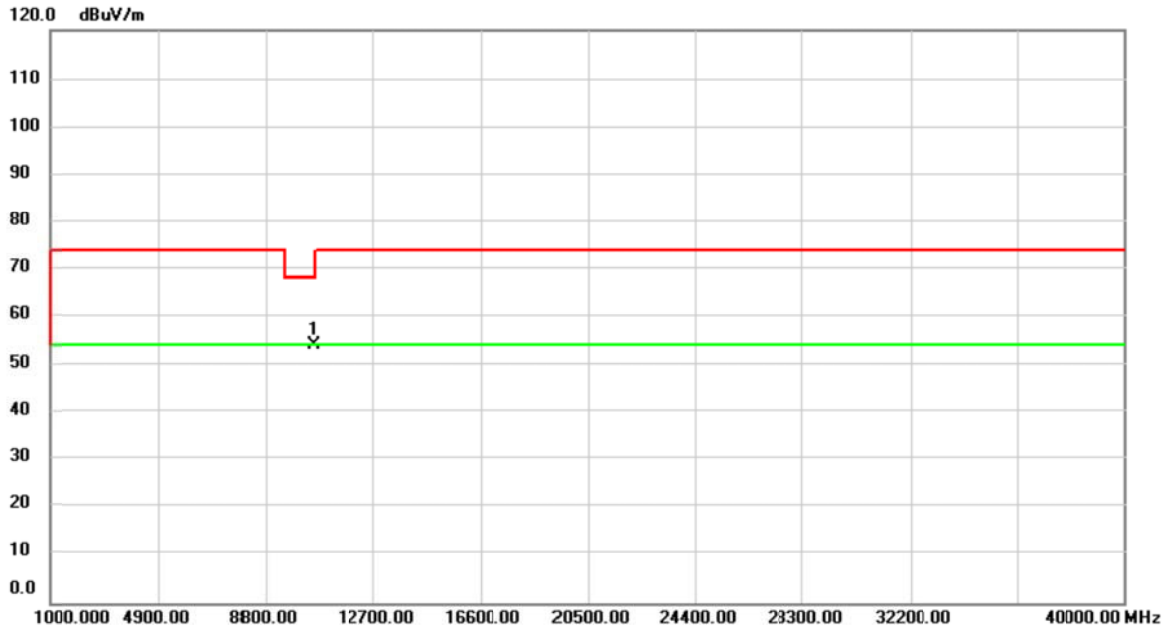

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10540.00	50.85	3.29	54.14	68.20	-14.06	peak	


Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5310MHz

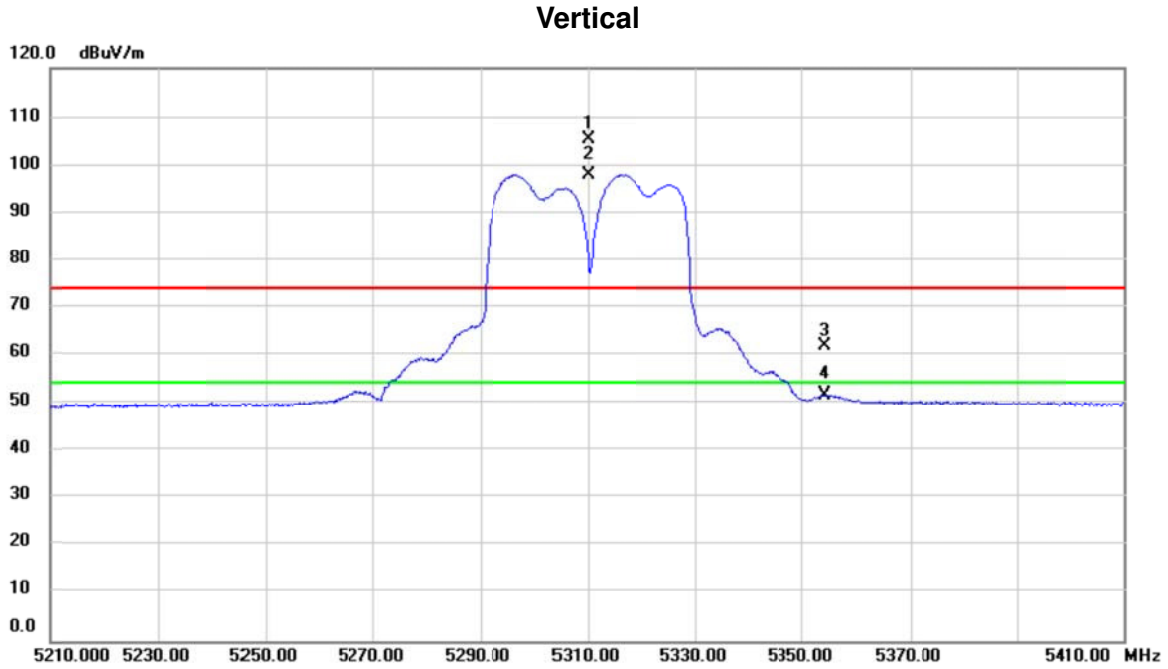

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5310.000	66.96	38.64	105.60	74.00	31.60	peak	No Limit
2	*	5310.000	59.45	38.64	98.09	54.00	44.09	AVG	No Limit
3		5354.400	23.19	38.69	61.88	74.00	-12.12	peak	
4		5354.400	13.19	38.69	51.88	54.00	-2.12	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5310MHz


### Vertical

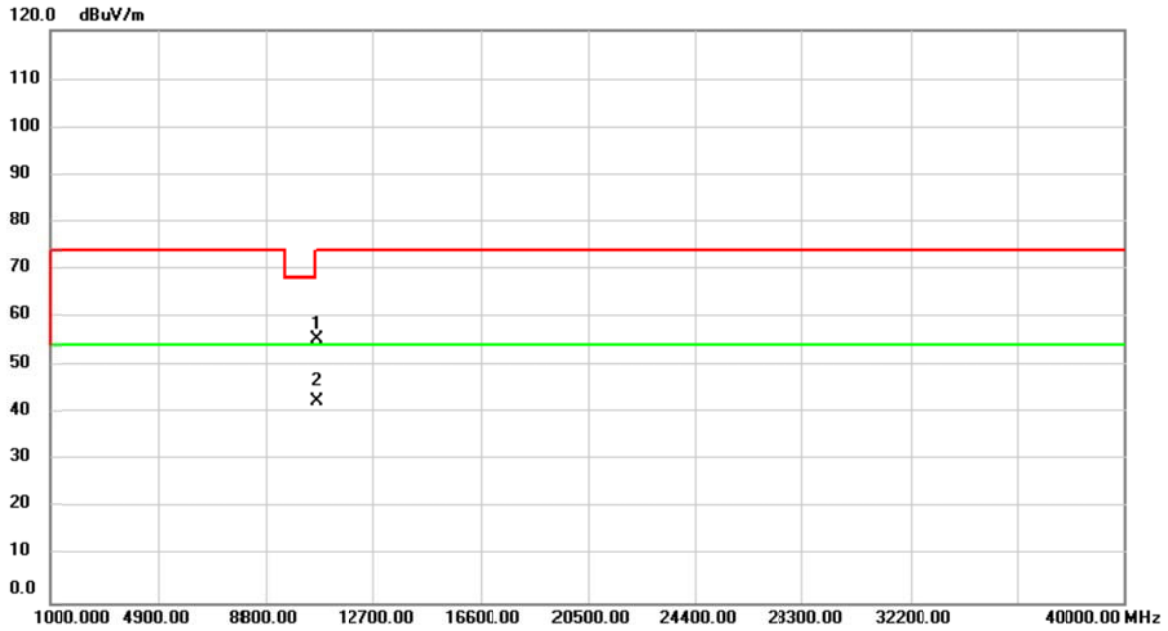

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10620.00	51.97	3.45	55.42	74.00	-18.58	peak	
2	*	10620.00	39.00	3.45	42.45	54.00	-11.55	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5310MHz


### Horizontal

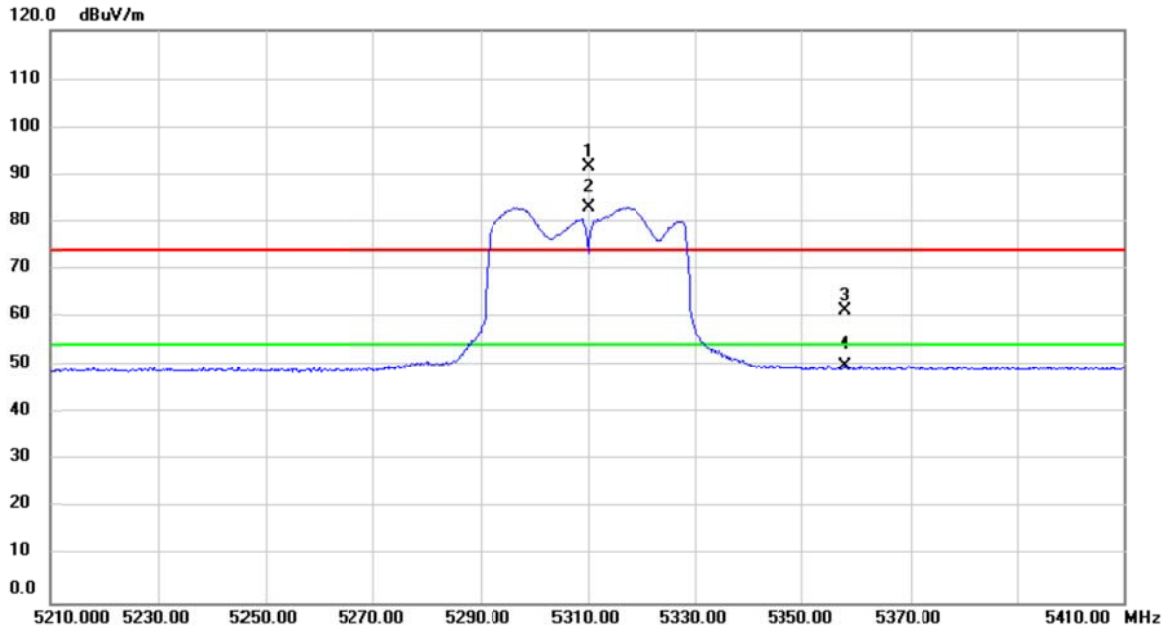

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5310.000	53.00	38.64	91.64	74.00	17.64	peak	No Limit
2	*	5310.000	44.24	38.64	82.88	54.00	28.88	AVG	No Limit
3		5358.000	22.72	38.70	61.42	74.00	-12.58	peak	
4		5358.000	11.33	38.70	50.03	54.00	-3.97	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5310MHz


### Horizontal

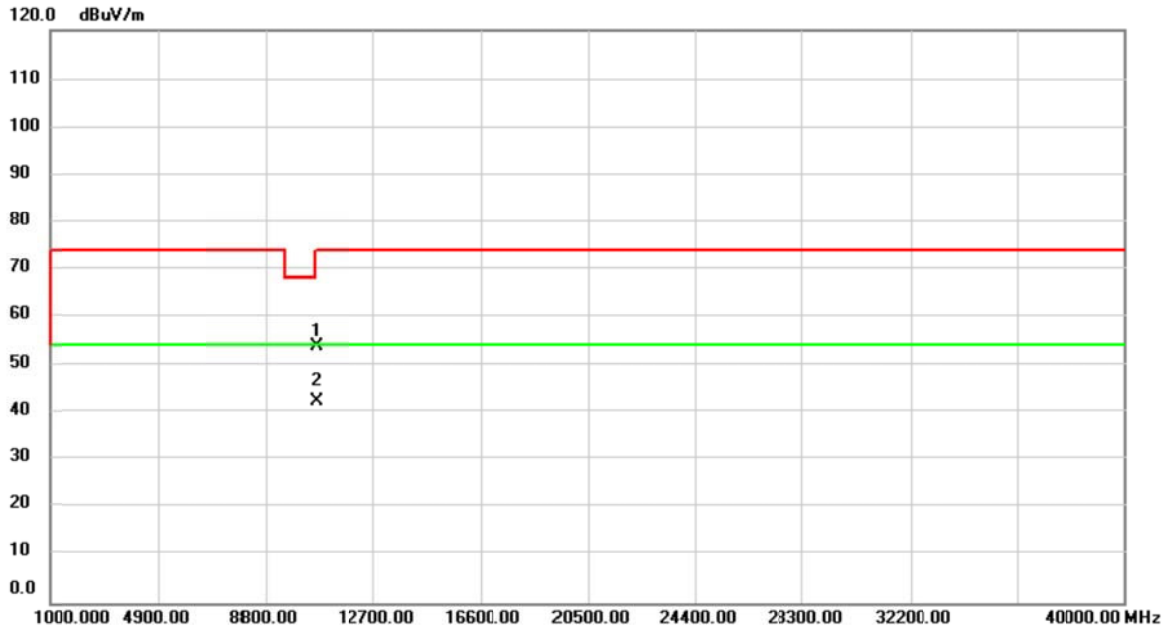

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10620.00	50.37	3.45	53.82	74.00	-20.18	peak	
2	*	10620.00	38.99	3.45	42.44	54.00	-11.56	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC80 Mode 5290MHz

**Vertical**

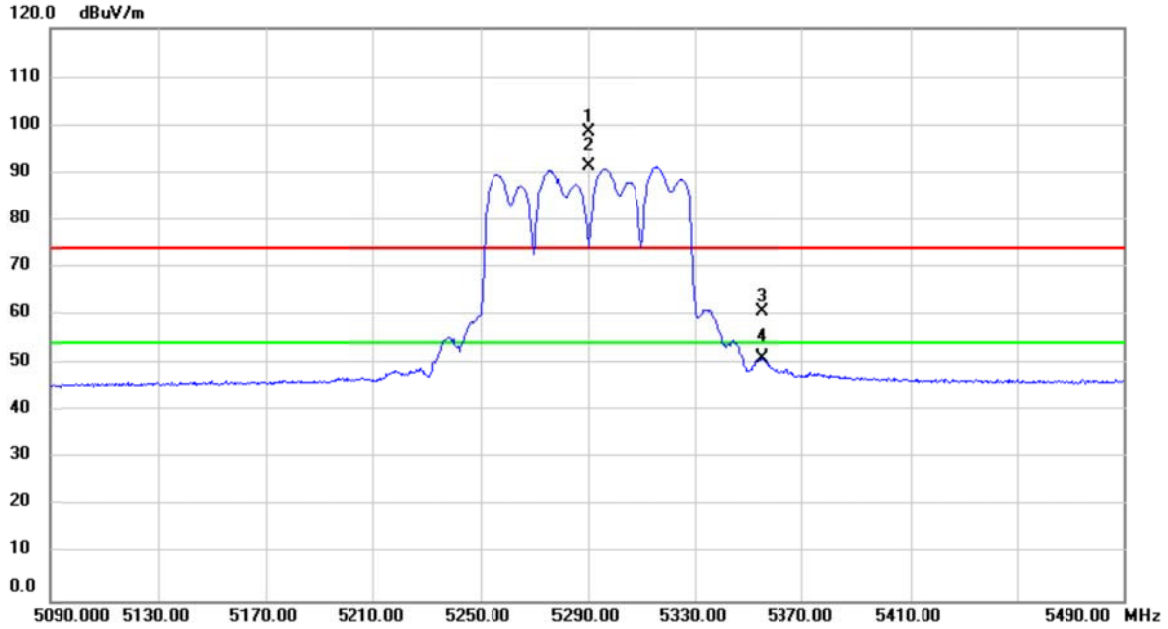


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5290.000	60.07	38.62	98.69	74.00	24.69	peak	No Limit
2	*	5290.000	52.61	38.62	91.23	54.00	37.23	AVG	No Limit
3		5354.800	22.16	38.69	60.85	74.00	-13.15	peak	
4		5354.800	12.61	38.69	51.30	54.00	-2.70	AVG	



Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC80 Mode 5290MHz


**Vertical**

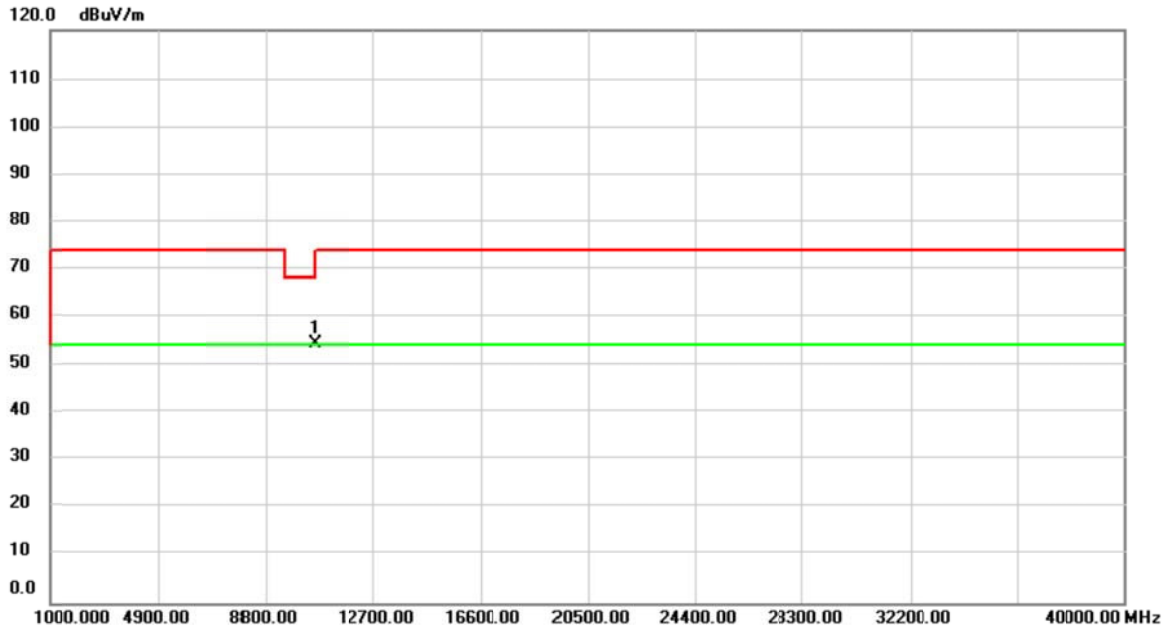

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10580.00	50.96	3.38	54.34	68.20	-13.86	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC80 Mode 5290MHz


### Horizontal

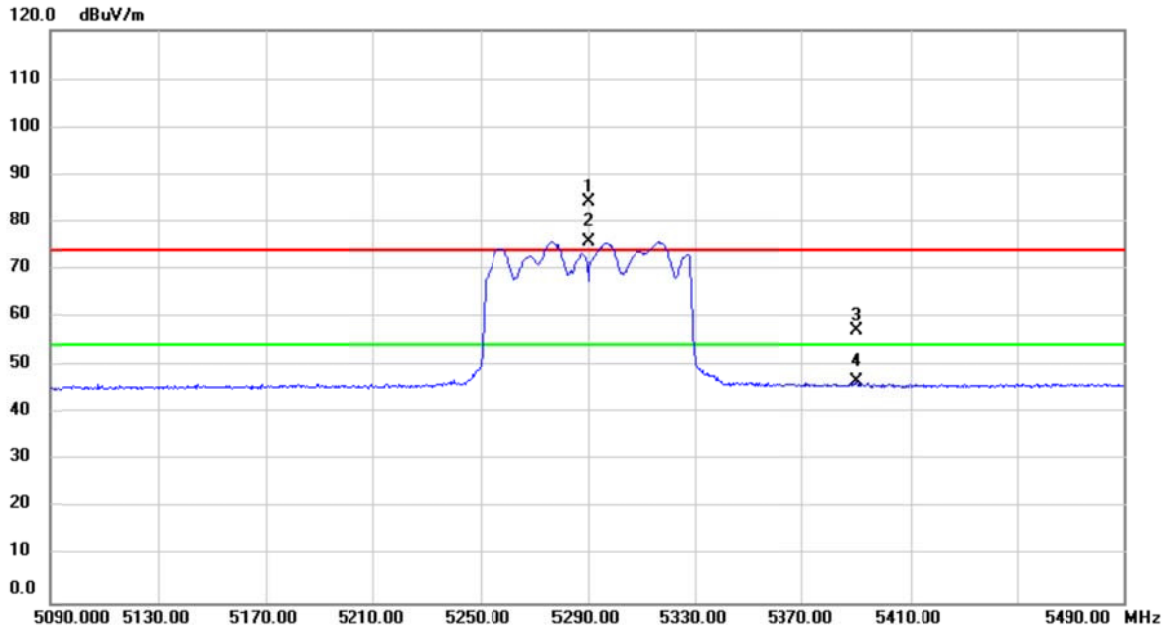

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5290.000	45.40	38.62	84.02	74.00	10.02	peak	No Limit
2	*	5290.000	37.14	38.62	75.76	54.00	21.76	AVG	No Limit
3		5390.400	18.42	38.74	57.16	74.00	-16.84	peak	
4		5390.400	7.77	38.74	46.51	54.00	-7.49	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC80 Mode 5290MHz


### Horizontal

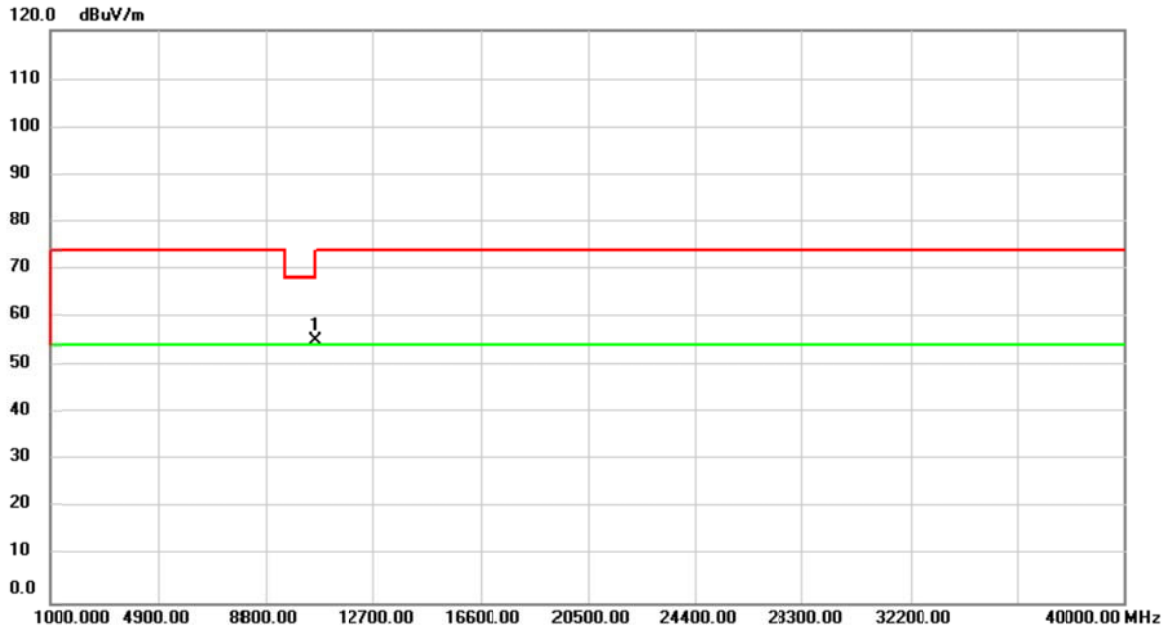

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10580.00	51.77	3.38	55.15	68.20	-13.05	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5500MHz


### Vertical

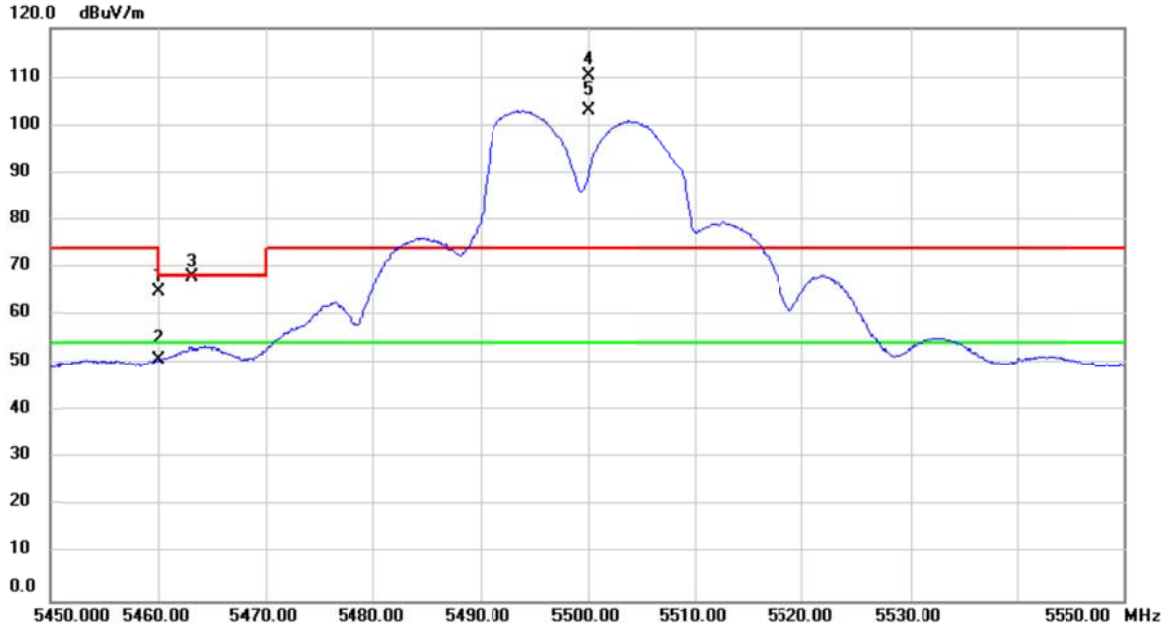

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5460.000	26.04	38.82	64.86	68.20	-3.34	peak	
2		5460.000	12.01	38.82	50.83	54.00	-3.17	AVG	
3		5463.100	29.00	38.83	67.83	68.20	-0.37	peak	
4	X	5500.000	71.52	38.87	110.39	74.00	36.39	peak	No Limit
5	*	5500.000	64.20	38.87	103.07	54.00	49.07	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5500MHz


### Vertical

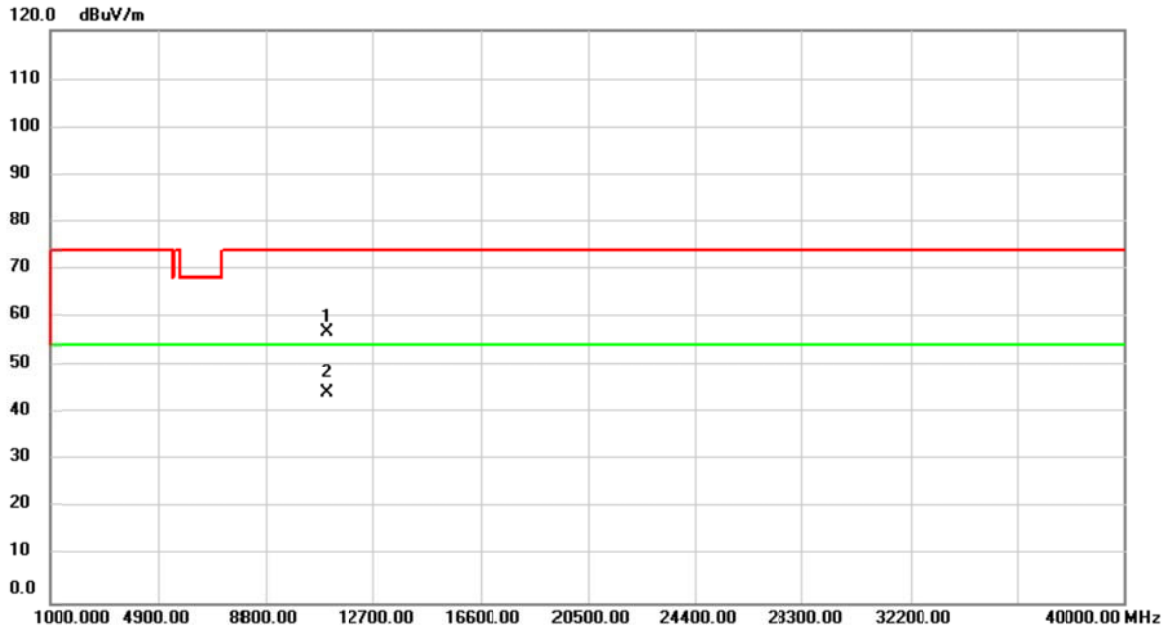

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11000.00	52.72	4.26	56.98	74.00	-17.02	peak	
2	*	11000.00	39.96	4.26	44.22	54.00	-9.78	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5500MHz


### Horizontal

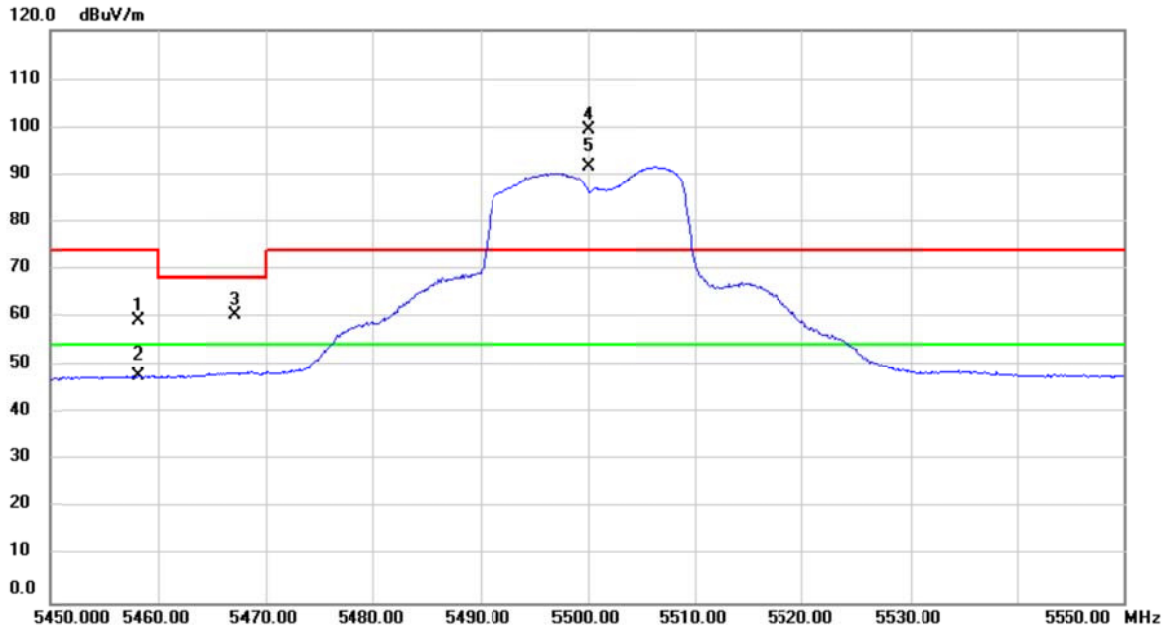

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5458.200	20.57	38.82	59.39	74.00	-14.61	peak	
2		5458.200	9.07	38.82	47.89	54.00	-6.11	AVG	
3		5467.310	21.53	38.83	60.36	68.20	-7.84	peak	
4	X	5500.000	60.58	38.87	99.45	74.00	25.45	peak	No Limit
5	*	5500.000	52.66	38.87	91.53	54.00	37.53	AVG	No Limit


Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5500MHz

**Horizontal**

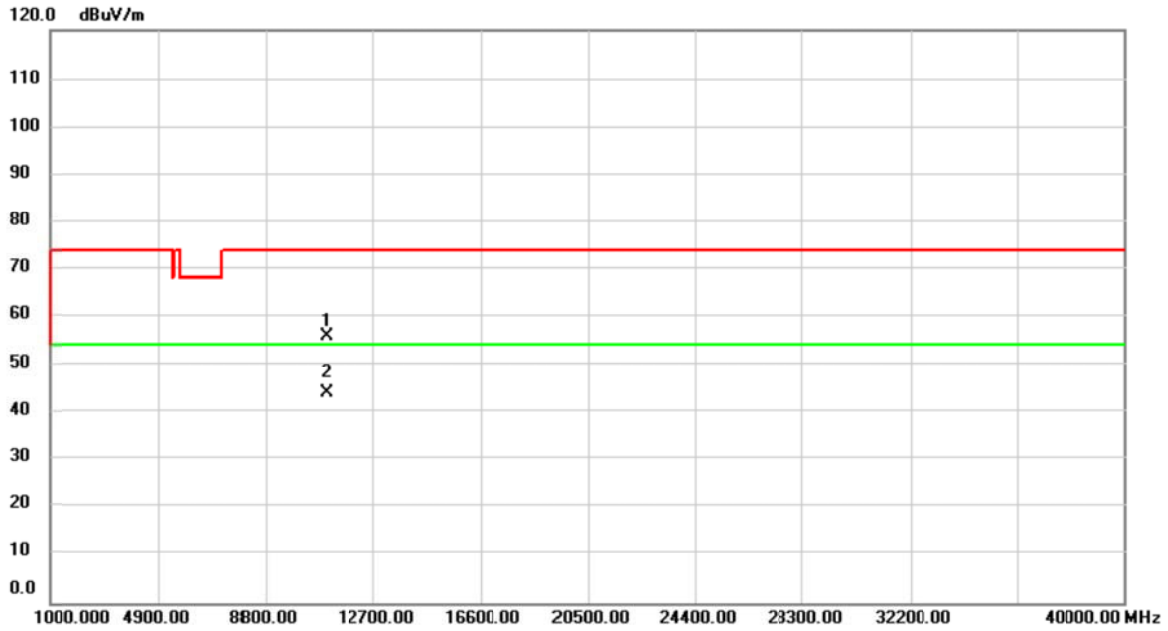

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11000.00	51.75	4.26	56.01	74.00	-17.99	peak	
2	*	11000.00	39.98	4.26	44.24	54.00	-9.76	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5580MHz

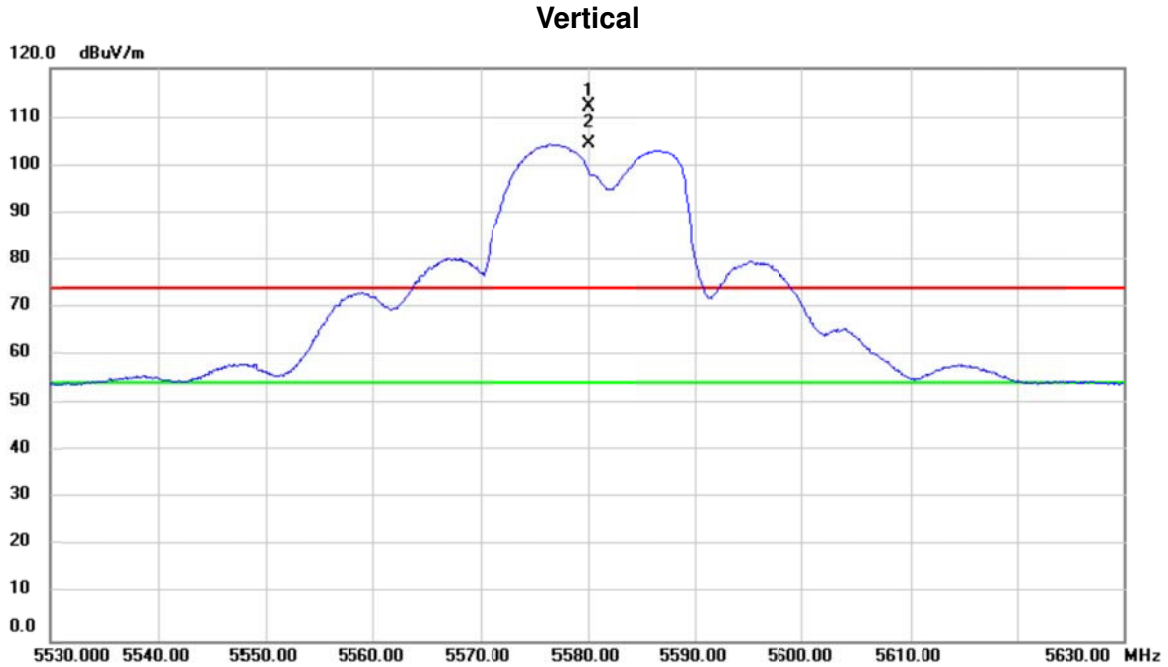


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5580.000	72.99	39.10	112.09	74.00	38.09	peak	No Limit
2	*	5580.000	65.31	39.10	104.41	54.00	50.41	AVG	No Limit



Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5580MHz


### Vertical

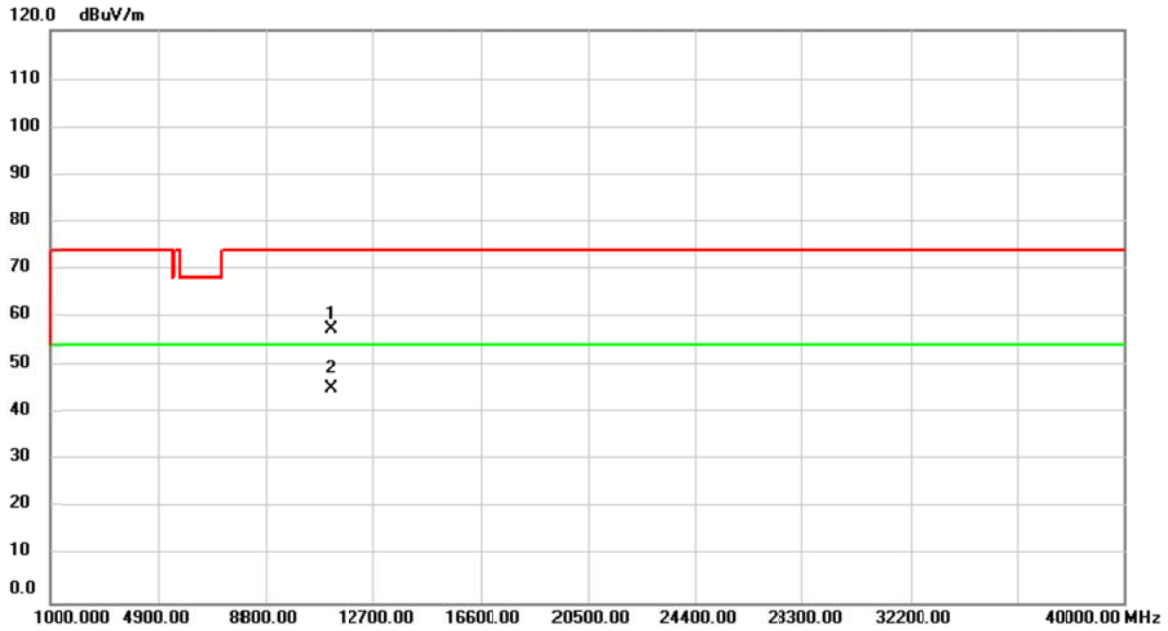

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11160.00	52.97	4.58	57.55	74.00	-16.45	peak	
2	*	11160.00	40.59	4.58	45.17	54.00	-8.83	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5580MHz


### Horizontal

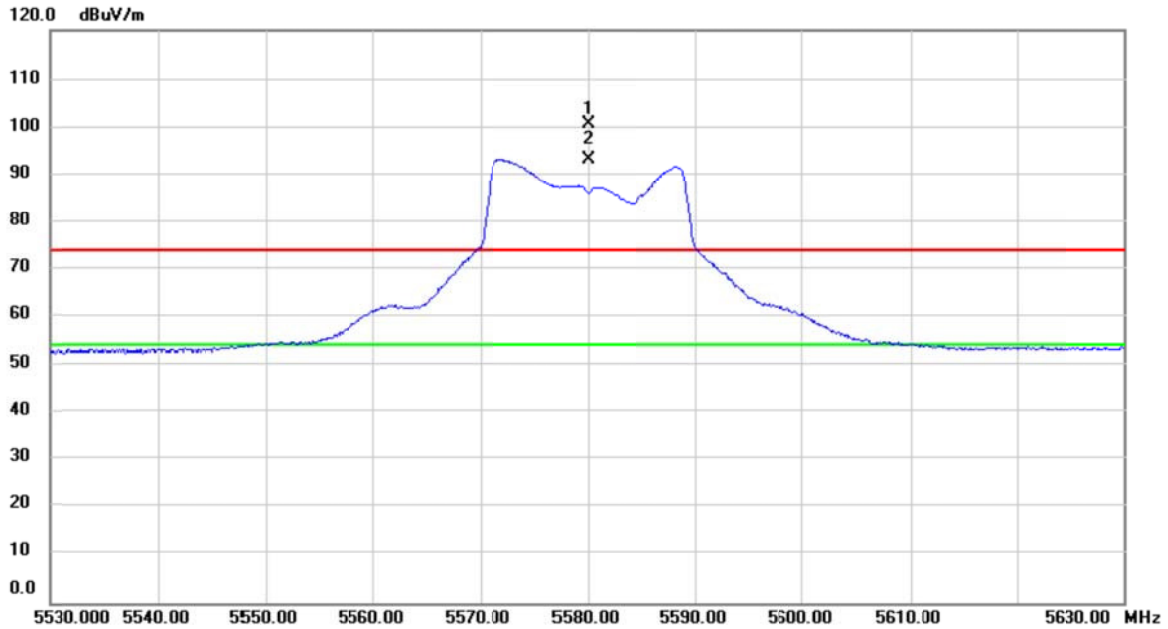

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5580.000	61.50	39.10	100.60	74.00	26.60	peak	No Limit
2	*	5580.000	54.04	39.10	93.14	54.00	39.14	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5580MHz


### Horizontal

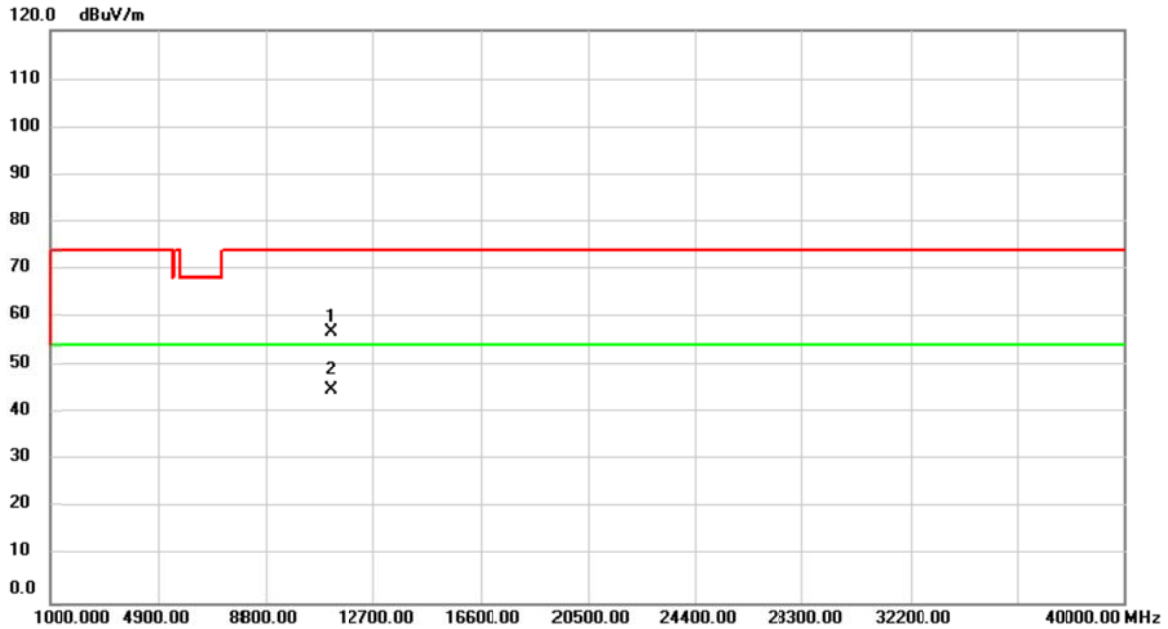

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11160.00	52.31	4.58	56.89	74.00	-17.11	peak	
2	*	11160.00	40.40	4.58	44.98	54.00	-9.02	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5700MHz


**Vertical**

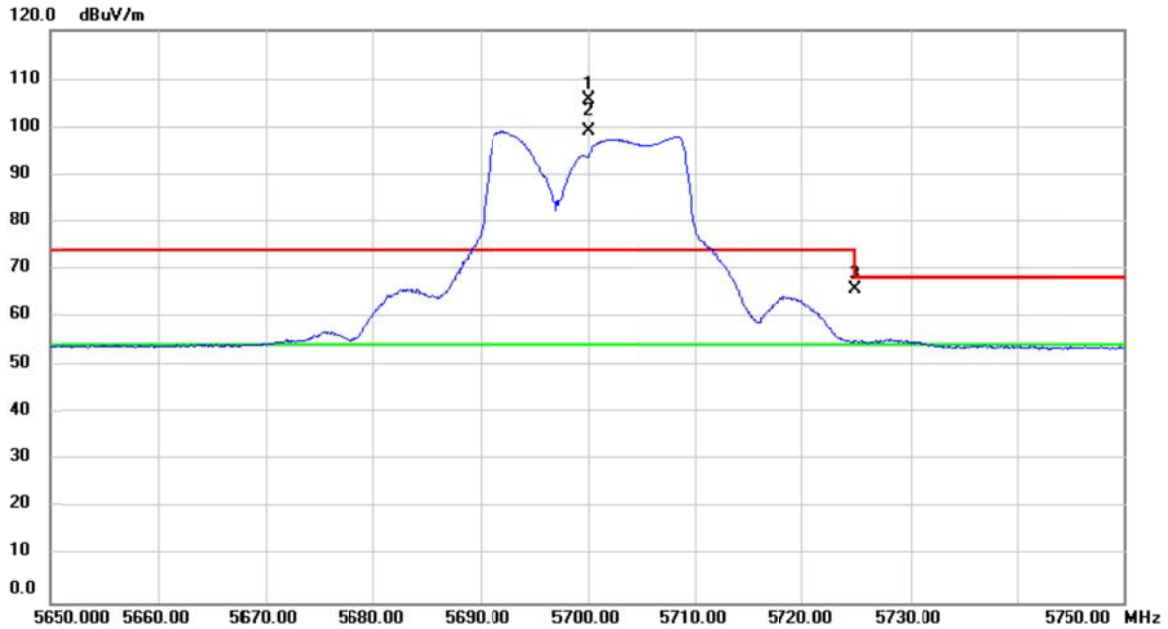

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5700.000	66.42	39.45	105.87	74.00	31.87	peak	No Limit
2	*	5700.000	59.62	39.45	99.07	54.00	45.07	AVG	No Limit
3		5725.000	26.36	39.53	65.89	68.20	-2.31	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5700MHz


### Vertical

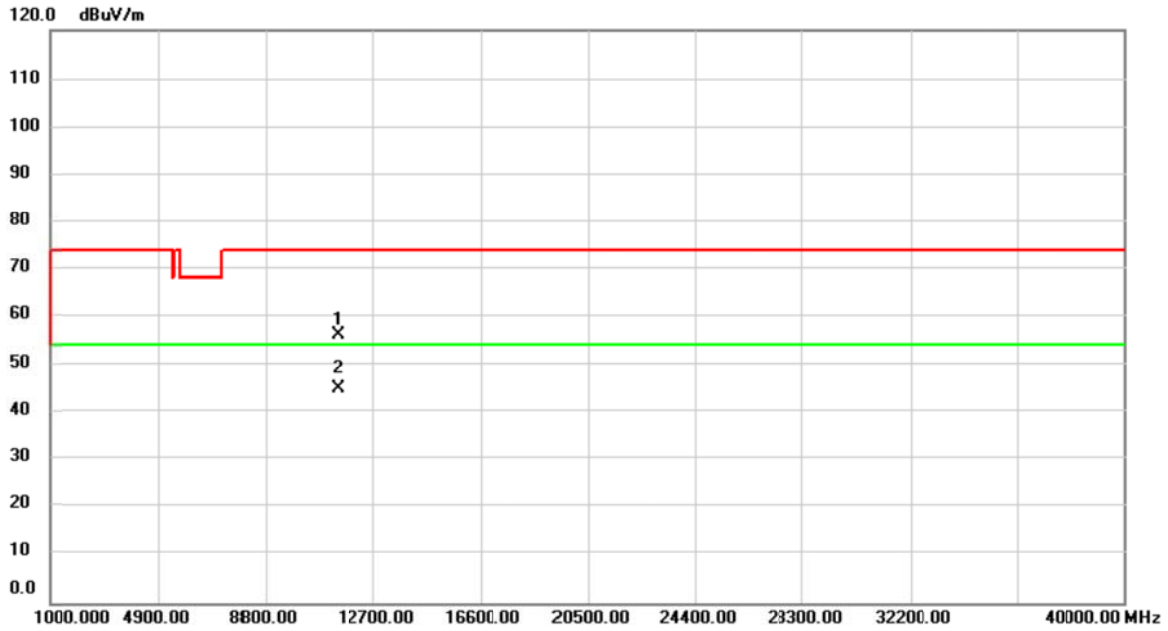

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11400.00	51.09	5.05	56.14	74.00	-17.86	peak	
2	*	11400.00	40.21	5.05	45.26	54.00	-8.74	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5700MHz


### Horizontal

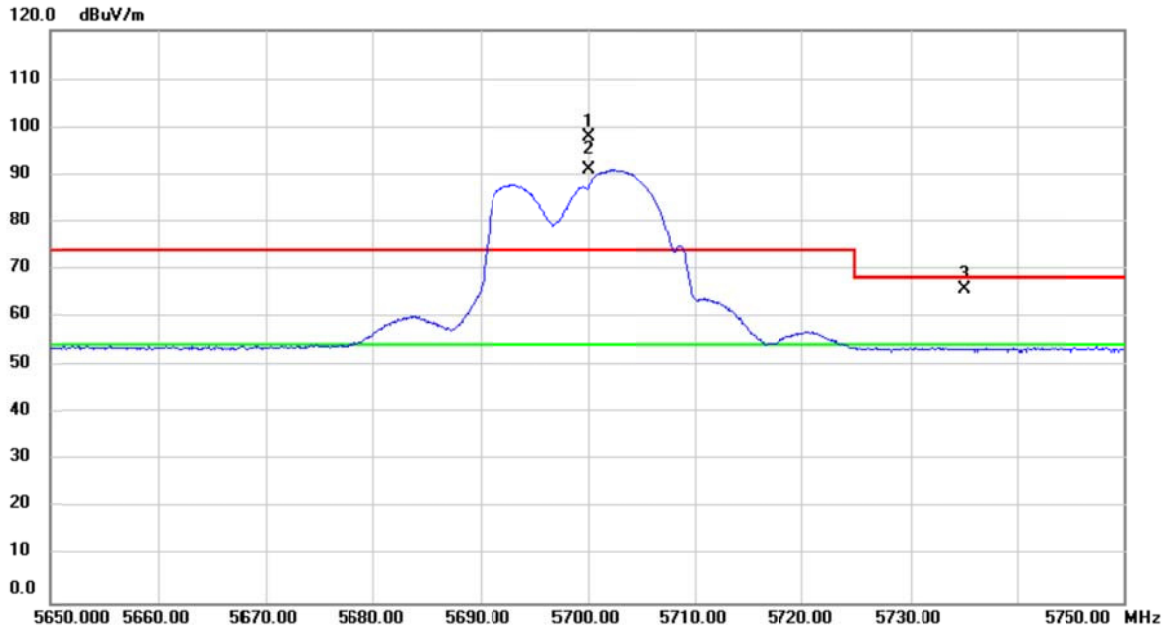

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5700.000	58.55	39.45	98.00	74.00	24.00	peak	No Limit
2	*	5700.000	51.62	39.45	91.07	54.00	37.07	AVG	No Limit
3		5735.075	26.25	39.55	65.80	68.20	-2.40	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5700MHz


**Horizontal**

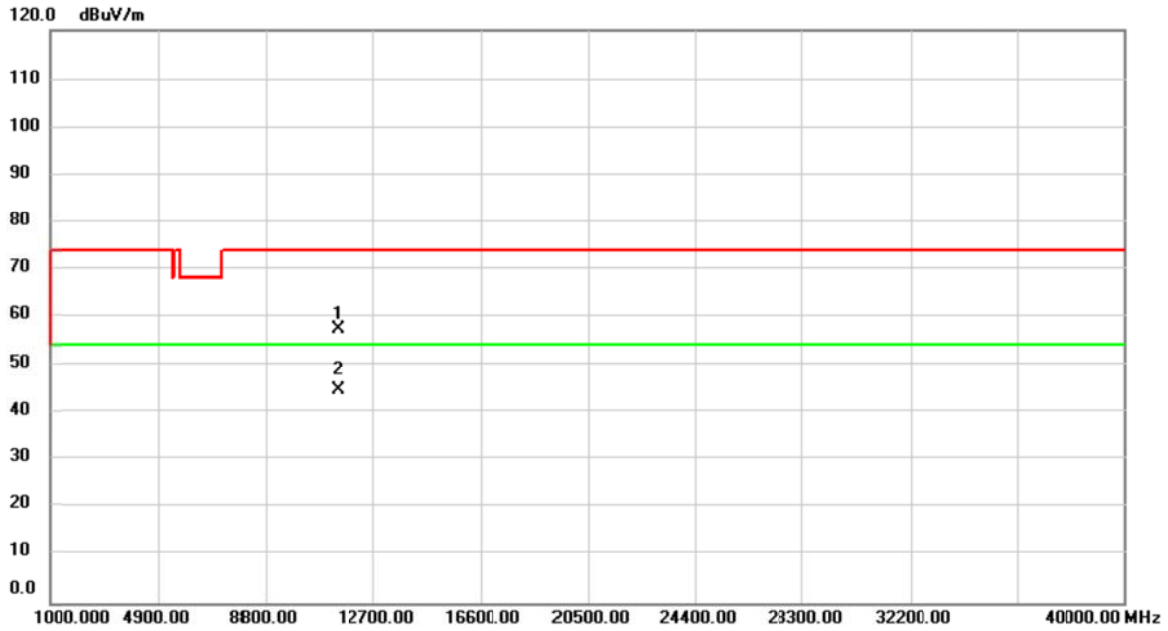

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11400.00	52.42	5.05	57.47	74.00	-16.53	peak	
2	*	11400.00	39.81	5.05	44.86	54.00	-9.14	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5510MHz

### Vertical

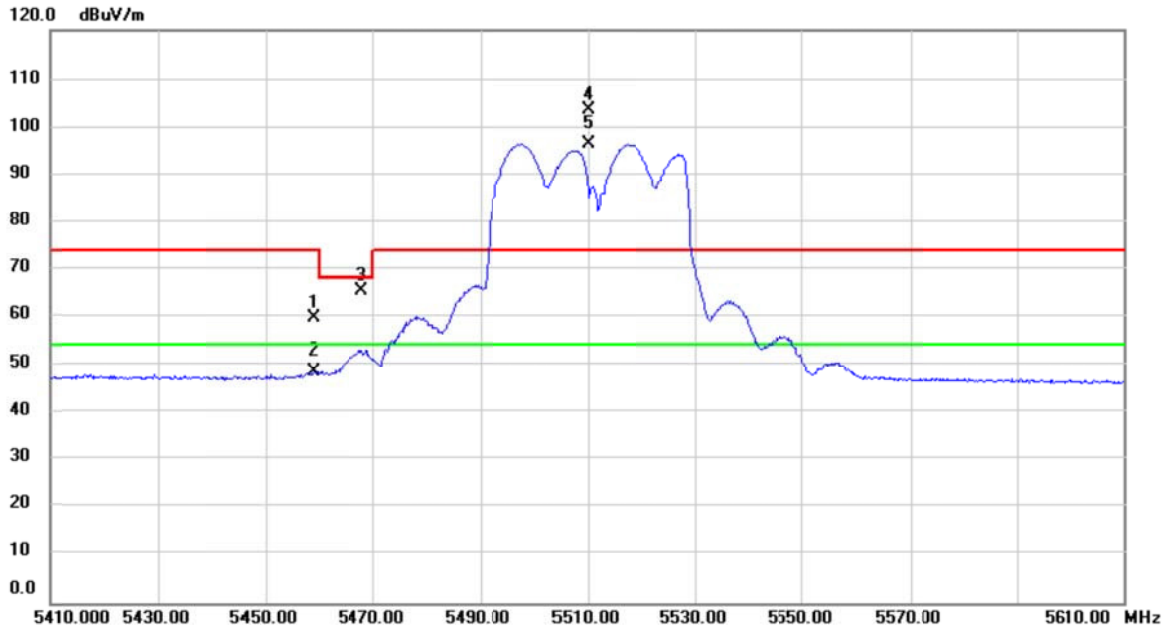


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5459.000	20.89	38.82	59.71	74.00	-14.29	peak	
2		5459.000	9.90	38.82	48.72	54.00	-5.28	AVG	
3		5467.880	26.69	38.83	65.52	68.20	-2.68	peak	
4	X	5510.000	64.72	38.89	103.61	74.00	29.61	peak	No Limit
5	*	5510.000	57.59	38.89	96.48	54.00	42.48	AVG	No Limit



Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5510MHz


### Vertical

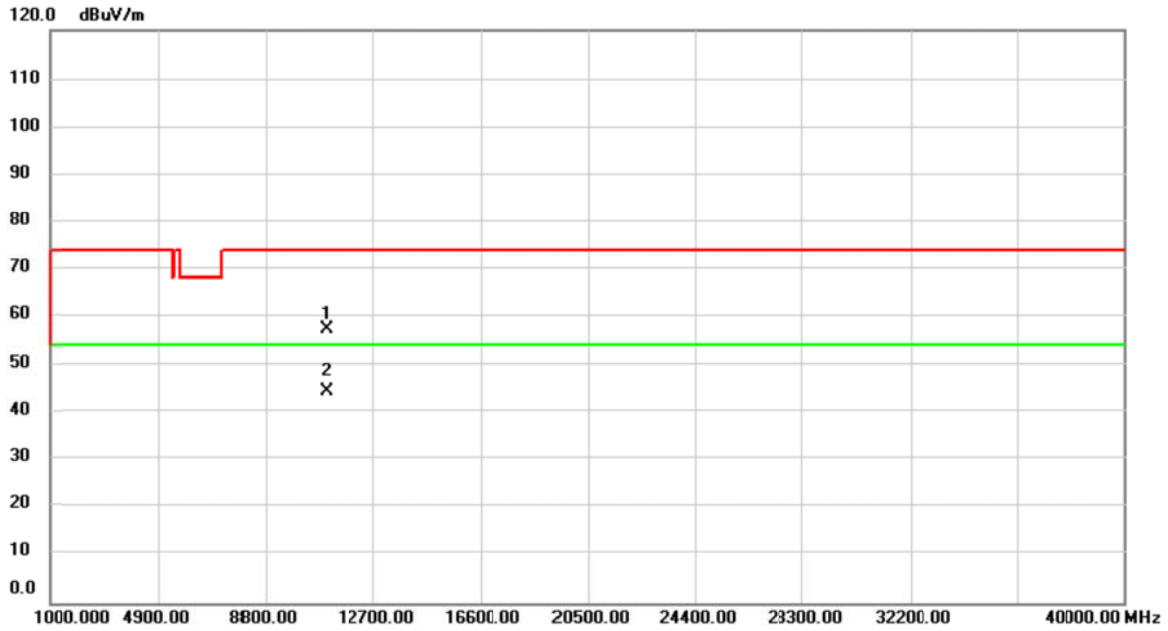

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11020.00	53.28	4.30	57.58	74.00	-16.42	peak	
2	*	11020.00	40.21	4.30	44.51	54.00	-9.49	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5510MHz


### Horizontal

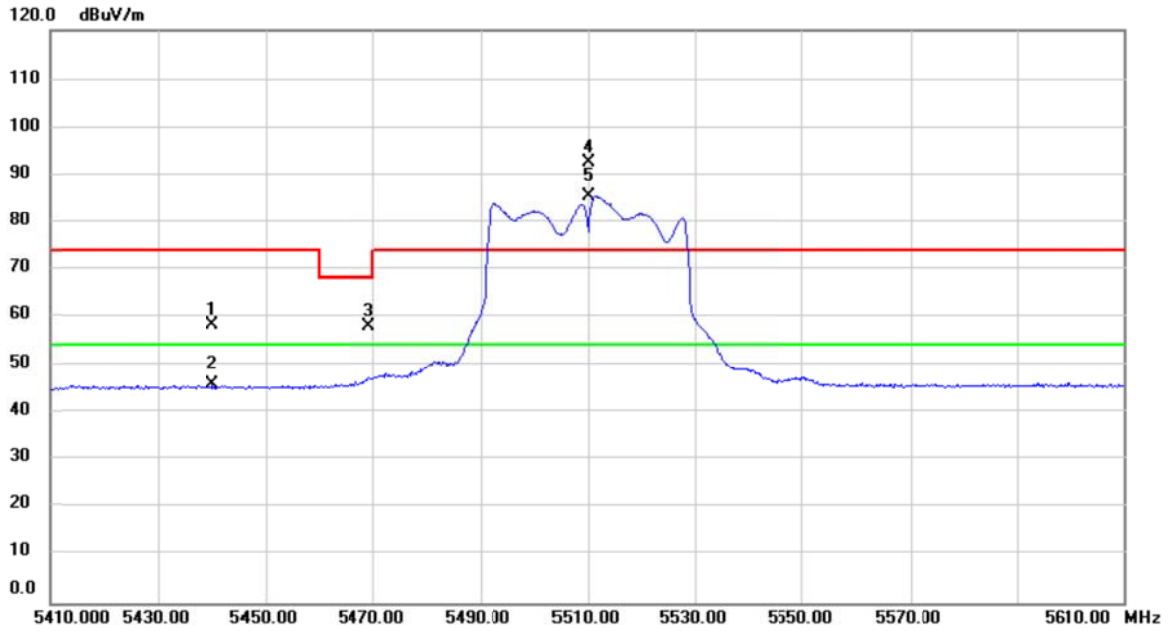

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5440.400	19.58	38.80	58.38	74.00	-15.62	peak	
2		5440.400	7.11	38.80	45.91	54.00	-8.09	AVG	
3		5469.220	19.16	38.84	58.00	68.20	-10.20	peak	
4	X	5510.000	53.52	38.89	92.41	74.00	18.41	peak	No Limit
5	*	5510.000	46.41	38.89	85.30	54.00	31.30	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5510MHz


**Horizontal**

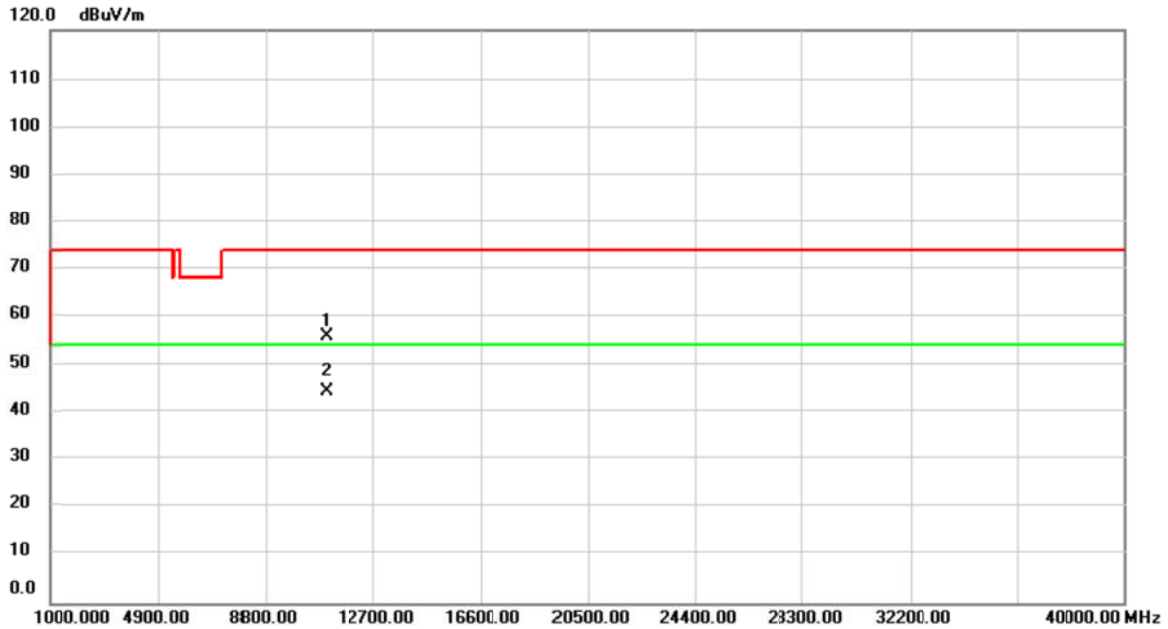

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11020.00	51.56	4.30	55.86	74.00	-18.14	peak	
2	*	11020.00	40.19	4.30	44.49	54.00	-9.51	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5550MHz


### Vertical

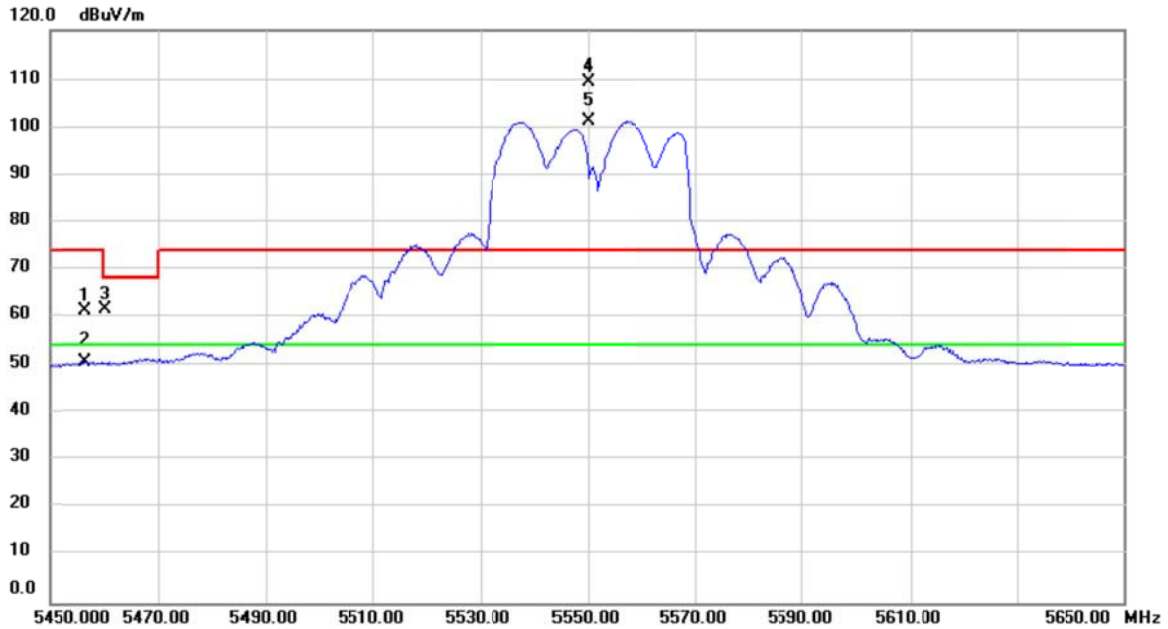

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5456.600	22.55	38.82	61.37	74.00	-12.63	peak	
2		5456.600	12.01	38.82	50.83	54.00	-3.17	AVG	
3		5460.300	22.98	38.82	61.80	68.20	-6.40	peak	
4	X	5550.000	70.34	39.02	109.36	74.00	35.36	peak	No Limit
5	*	5550.000	62.24	39.02	101.26	54.00	47.26	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5550MHz


**Vertical**

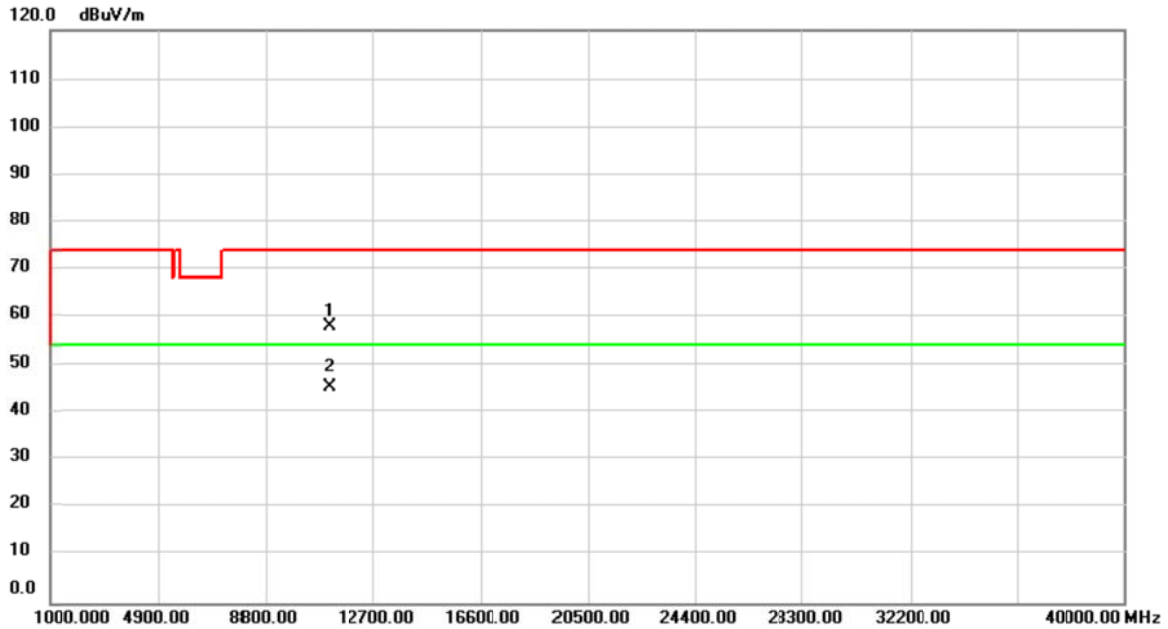

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11100.00	53.51	4.46	57.97	74.00	-16.03	peak	
2	*	11100.00	41.02	4.46	45.48	54.00	-8.52	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5550MHz


### Horizontal

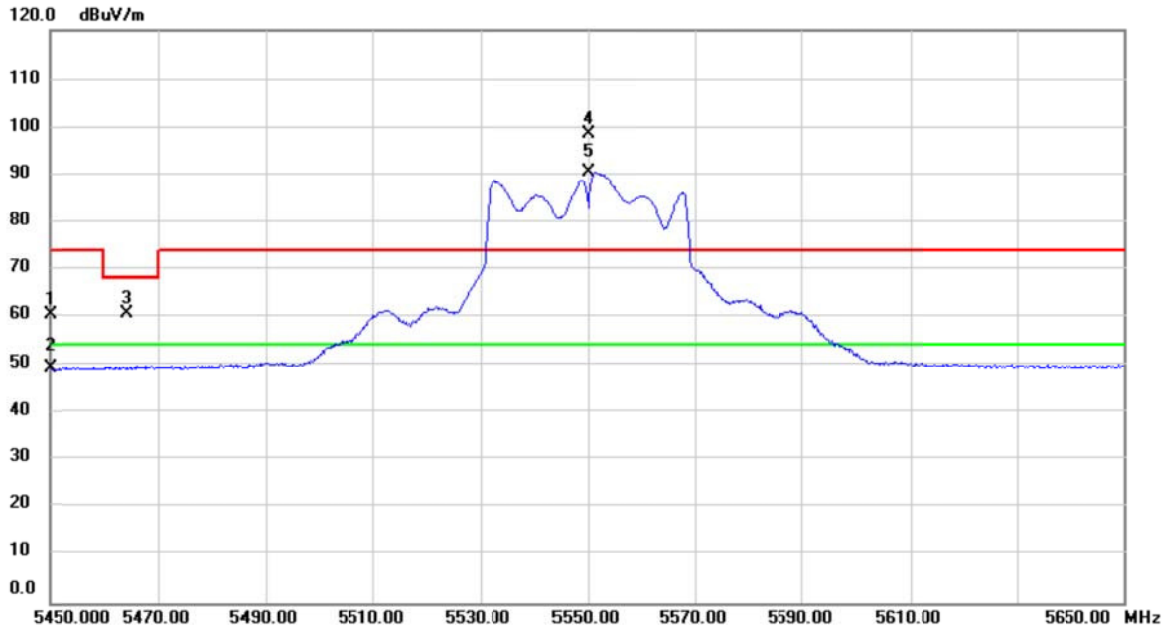

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5450.000	21.63	38.81	60.44	74.00	-13.56	peak	
2		5450.000	10.81	38.81	49.62	54.00	-4.38	AVG	
3		5464.280	21.86	38.83	60.69	68.20	-7.51	peak	
4	X	5550.000	59.53	39.02	98.55	74.00	24.55	peak	No Limit
5	*	5550.000	51.35	39.02	90.37	54.00	36.37	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5550MHz


**Horizontal**

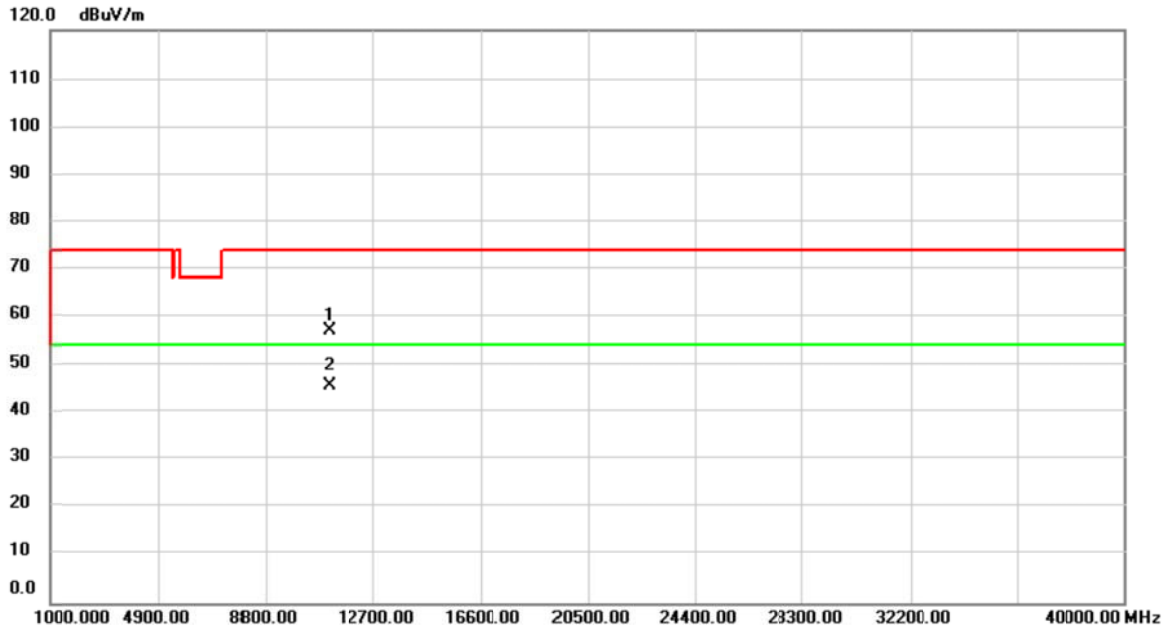

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11100.00	52.80	4.46	57.26	74.00	-16.74	peak	
2	*	11100.00	41.15	4.46	45.61	54.00	-8.39	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5670MHz

### Vertical

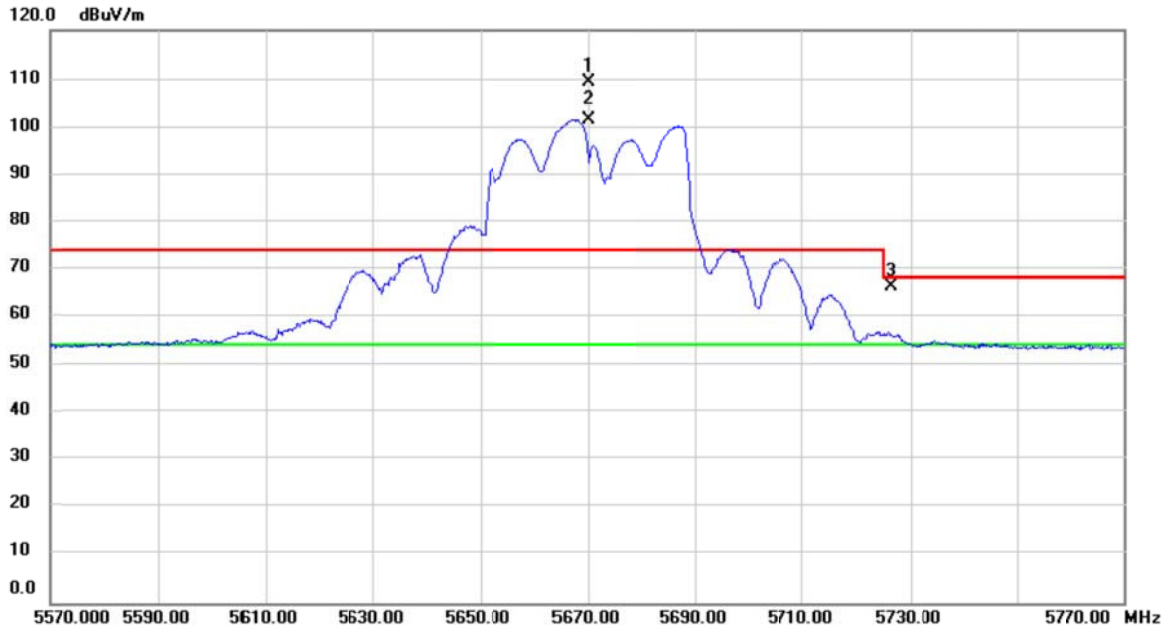


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5670.000	69.88	39.36	109.24	74.00	35.24	peak	No Limit
2	*	5670.000	62.15	39.36	101.51	54.00	47.51	AVG	No Limit
3		5726.305	27.00	39.53	66.53	68.20	-1.67	peak	



Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5670MHz


### Vertical

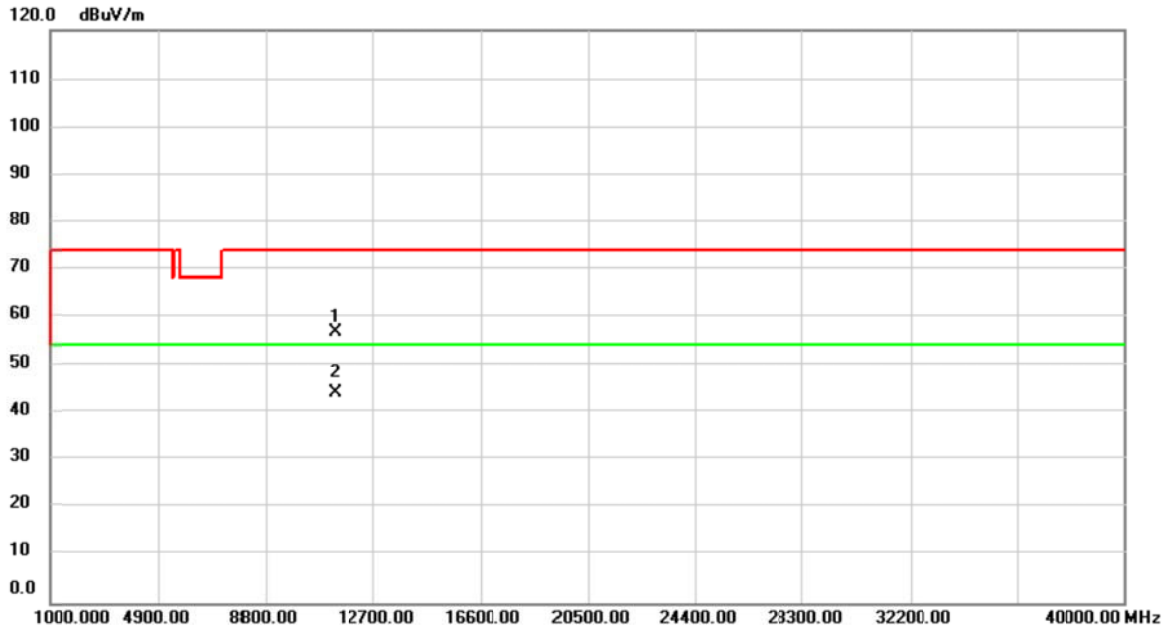

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11340.00	51.83	4.93	56.76	74.00	-17.24	peak	
2	*	11340.00	39.44	4.93	44.37	54.00	-9.63	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5670MHz


**Horizontal**

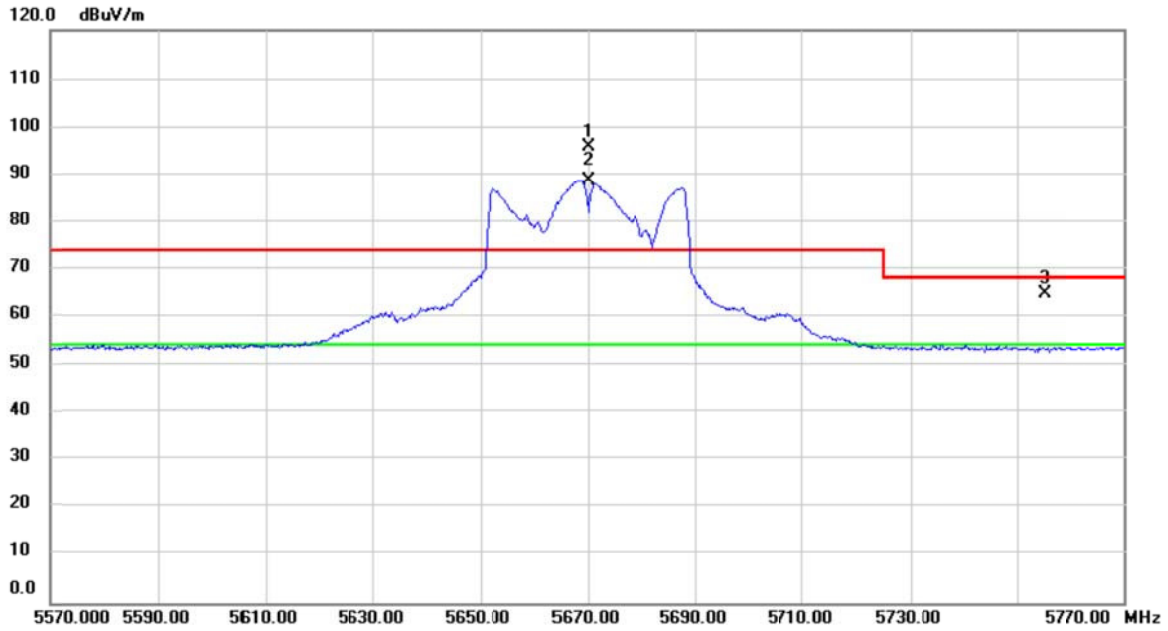

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5670.000	56.61	39.36	95.97	74.00	21.97	peak	No Limit
2	*	5670.000	49.34	39.36	88.70	54.00	34.70	AVG	No Limit
3		5755.195	25.30	39.61	64.91	68.20	-3.29	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5670MHz


### Horizontal

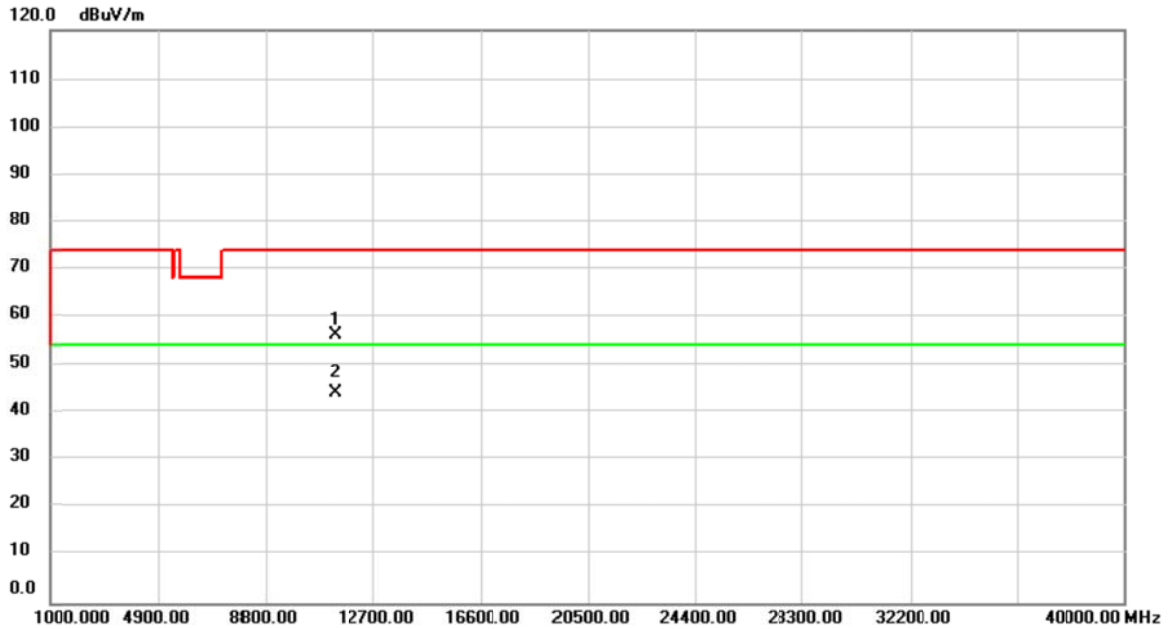

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11340.00	51.33	4.93	56.26	74.00	-17.74	peak	
2	*	11340.00	39.44	4.93	44.37	54.00	-9.63	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5530MHz


**Vertical**

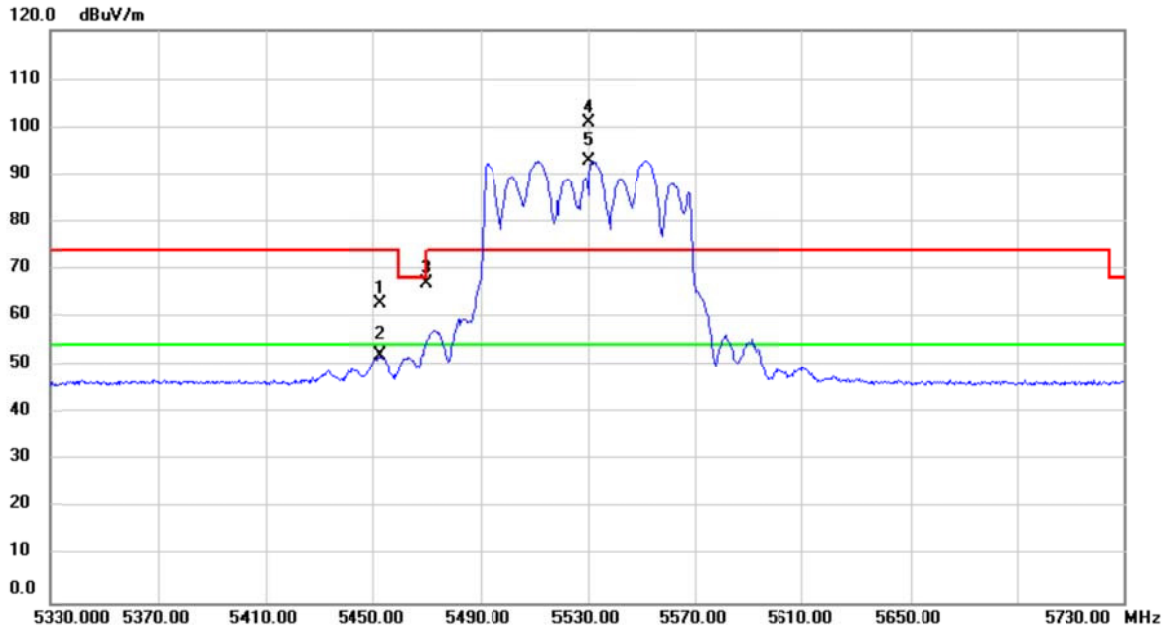

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5452.800	24.16	38.81	62.97	74.00	-11.03	peak	
2		5452.800	13.14	38.81	51.95	54.00	-2.05	AVG	
3		5469.970	28.08	38.84	66.92	68.20	-1.28	peak	
4	X	5530.000	61.87	38.95	100.82	74.00	26.82	peak	No Limit
5	*	5530.000	53.98	38.95	92.93	54.00	38.93	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5530MHz


**Vertical**

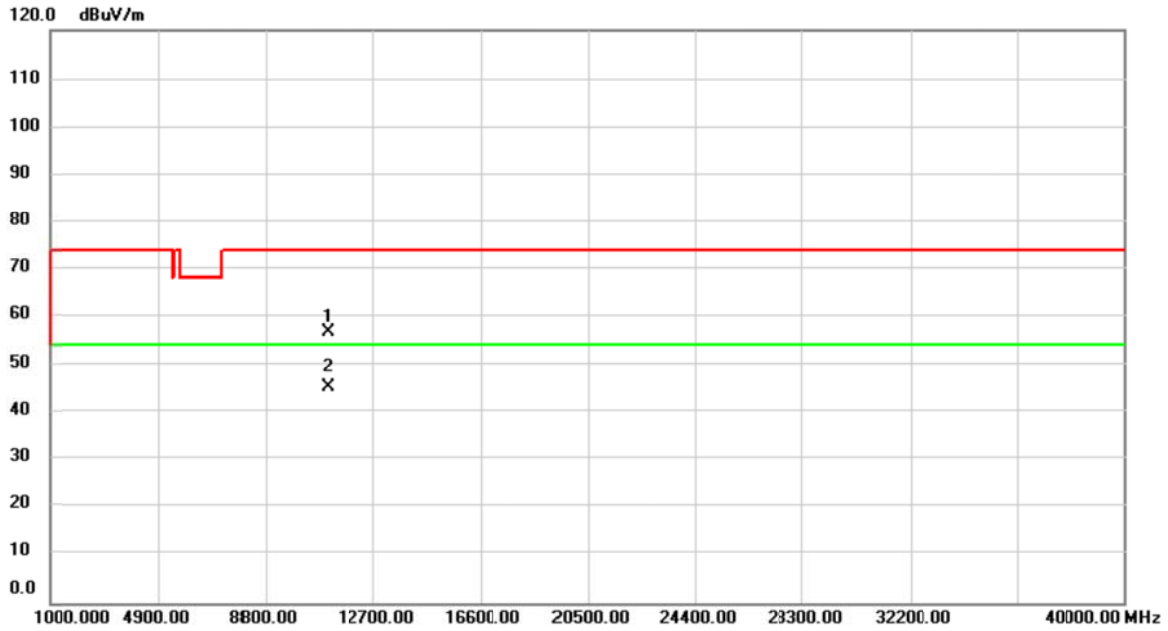

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11060.00	52.39	4.38	56.77	74.00	-17.23	peak	
2	*	11060.00	40.98	4.38	45.36	54.00	-8.64	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5530MHz


### Horizontal

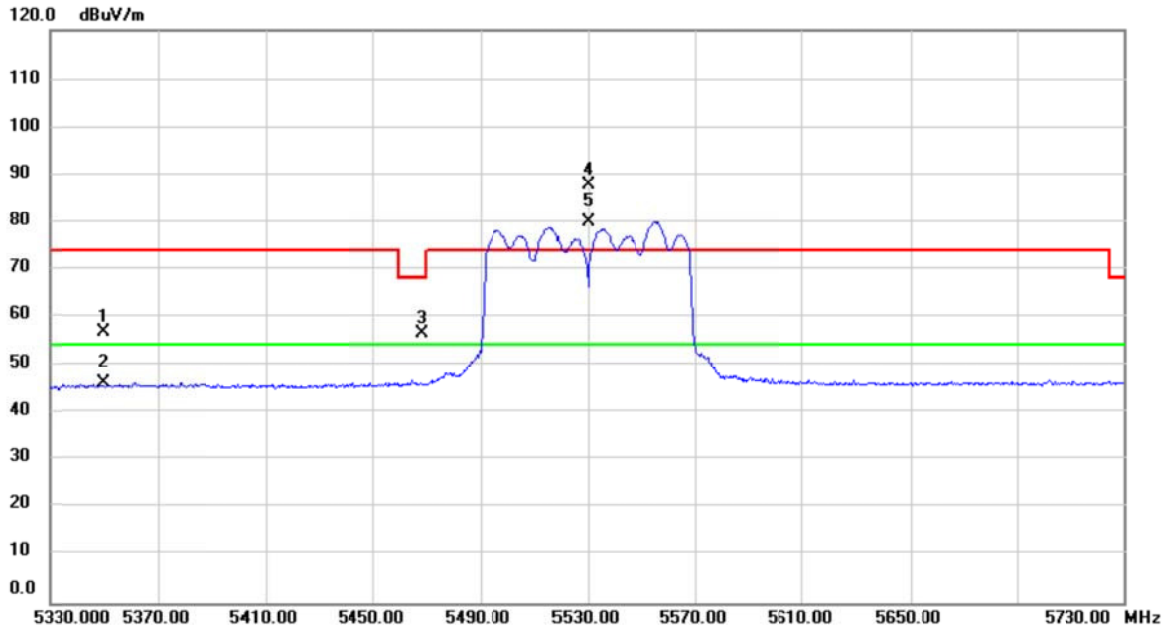

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5350.000	18.16	38.69	56.85	74.00	-17.15	peak	
2	X	5350.000	7.76	38.69	46.45	54.00	-7.55	AVG	
3	X	5468.580	17.80	38.83	56.63	68.20	-11.57	peak	
4	X	5530.000	48.87	38.95	87.82	74.00	13.82	peak	No Limit
5	*	5530.000	40.89	38.95	79.84	54.00	25.84	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5530MHz


**Horizontal**

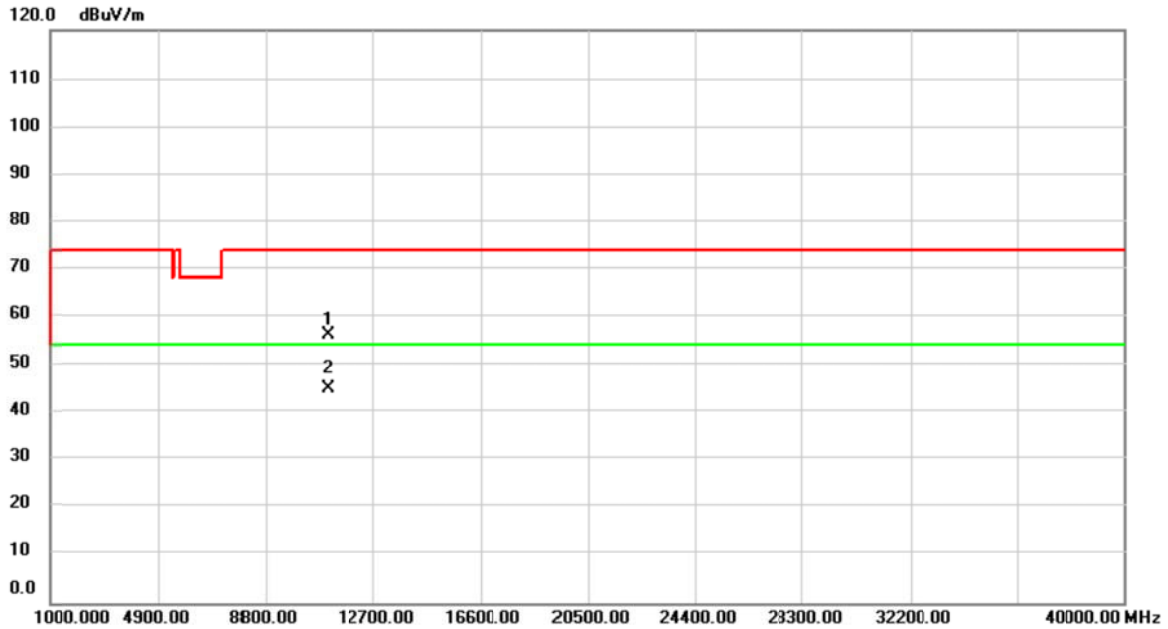

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11060.00	51.91	4.38	56.29	74.00	-17.71	peak	
2	*	11060.00	40.79	4.38	45.17	54.00	-8.83	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5610MHz

Vertical

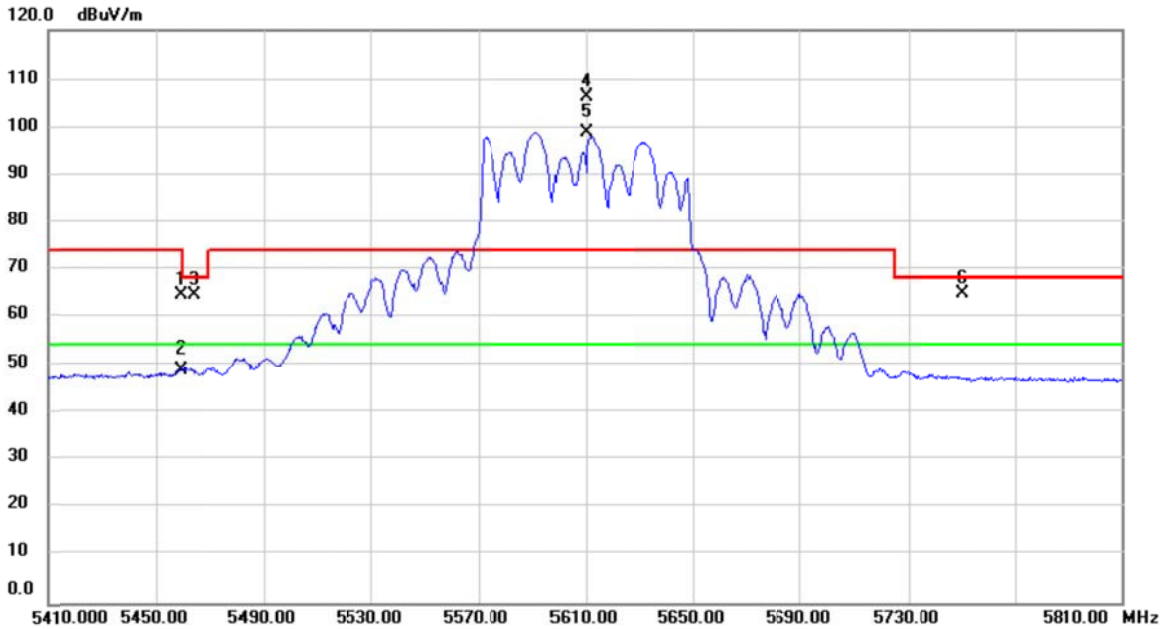


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5459.200	25.75	38.82	64.57	74.00	-9.43	peak	
2		5459.200	10.34	38.82	49.16	54.00	-4.84	AVG	
3		5464.260	25.81	38.83	64.64	68.20	-3.56	peak	
4	X	5610.000	67.10	39.18	106.28	74.00	32.28	peak	No Limit
5	*	5610.000	59.65	39.18	98.83	54.00	44.83	AVG	No Limit
6		5750.755	25.48	39.60	65.08	68.20	-3.12	peak	



Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5610MHz


**Vertical**

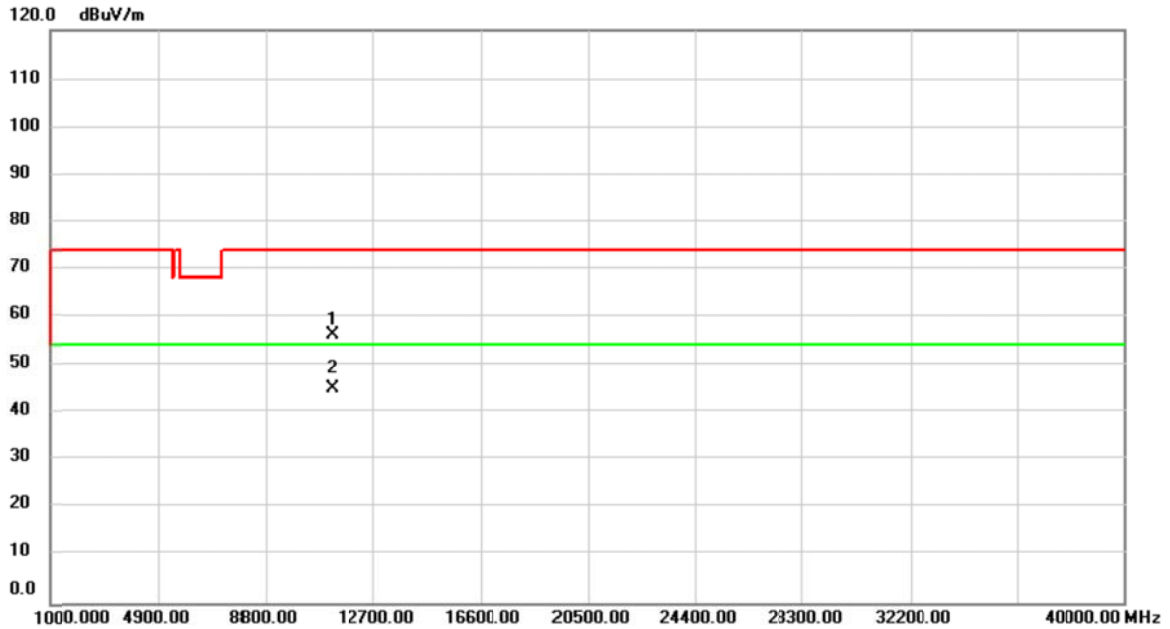

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11220.00	51.60	4.69	56.29	74.00	-17.71	peak	
2	*	11220.00	40.45	4.69	45.14	54.00	-8.86	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5610MHz


**Horizontal**

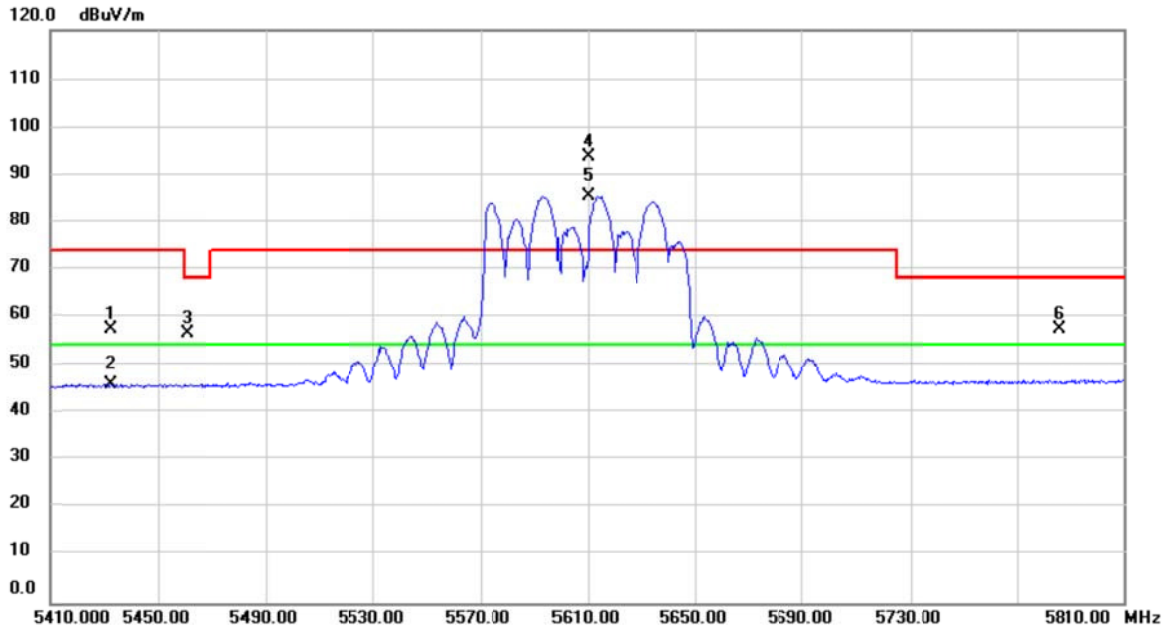

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5432.850	18.65	38.79	57.44	74.00	-16.56	peak	
2		5432.850	7.35	38.79	46.14	54.00	-7.86	AVG	
3		5460.890	17.86	38.82	56.68	68.20	-11.52	peak	
4	X	5610.000	54.58	39.18	93.76	74.00	19.76	peak	No Limit
5	*	5610.000	46.07	39.18	85.25	54.00	31.25	AVG	No Limit
6		5785.690	17.80	39.70	57.50	68.20	-10.70	peak	


Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5610MHz

### Horizontal

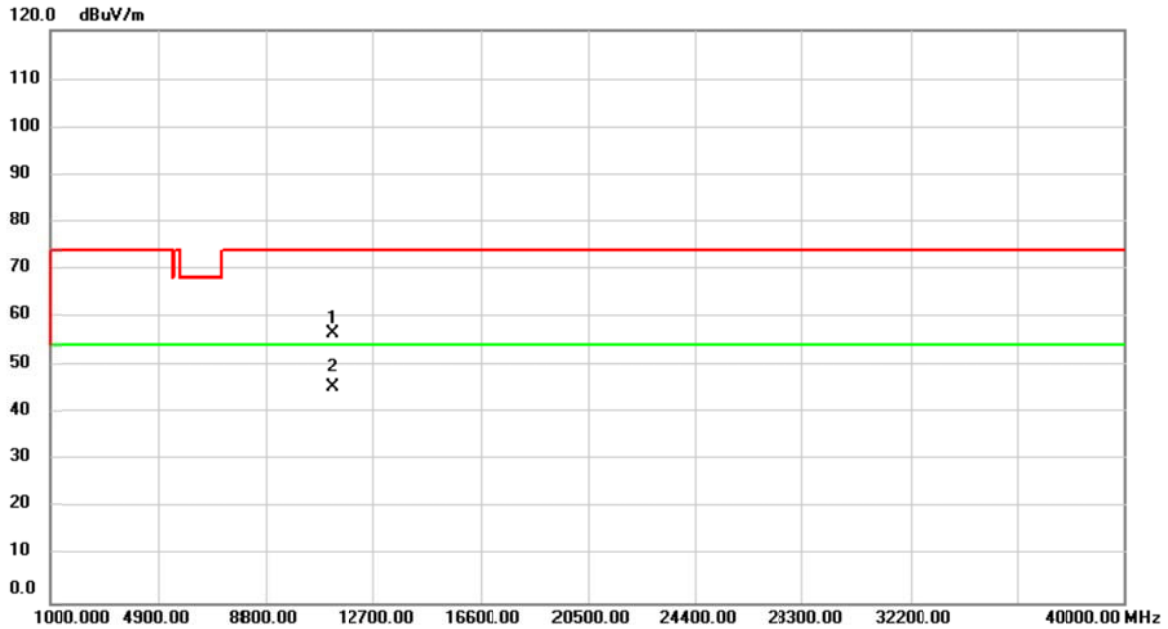

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11220.00	51.83	4.69	56.52	74.00	-17.48	peak	
2	*	11220.00	40.64	4.69	45.33	54.00	-8.67	AVG	

TX A Mode\_DUTY CYCLE

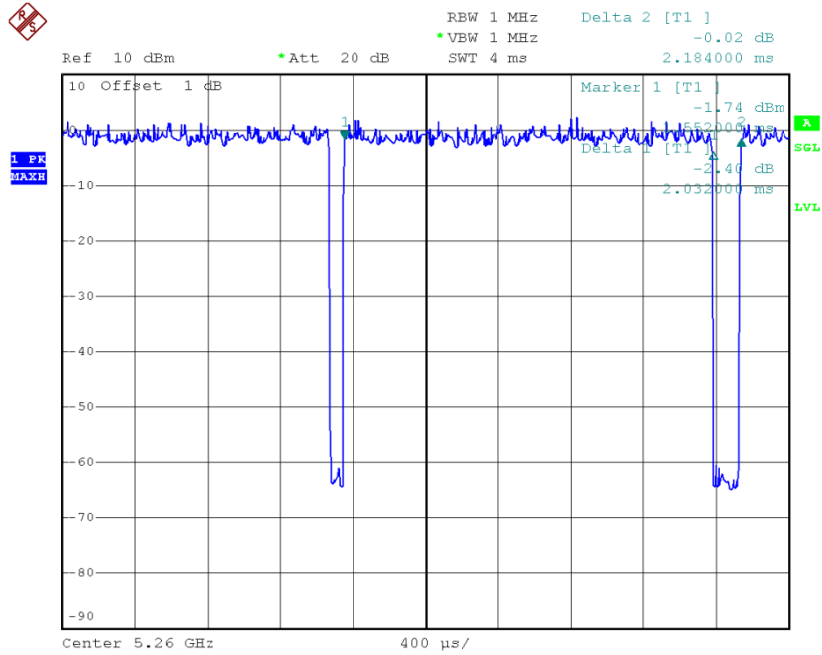

Date: 5.JUL.2016 11:35:50

Duty cycle: TX 5260 MHz

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$

$T_{\text{ON}}$ : 2.032 msec

$T_{\text{Total}}$ : 2.184 msec

Duty cycle: 93.04 %

$$\text{Duty Factor} = 10 \log(1/\text{Duty cycle})$$


Duty Factor = 0.31

Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is less than 98 %, so, the output power and power density should be calculated as

$$\text{Output Power} = \text{Measured power} + \text{Duty factor}$$

$$\text{Power Spectral Density} = \text{Measured density} + \text{Duty factor}$$

**TX N20 Mode\_DUTY CYCLE**

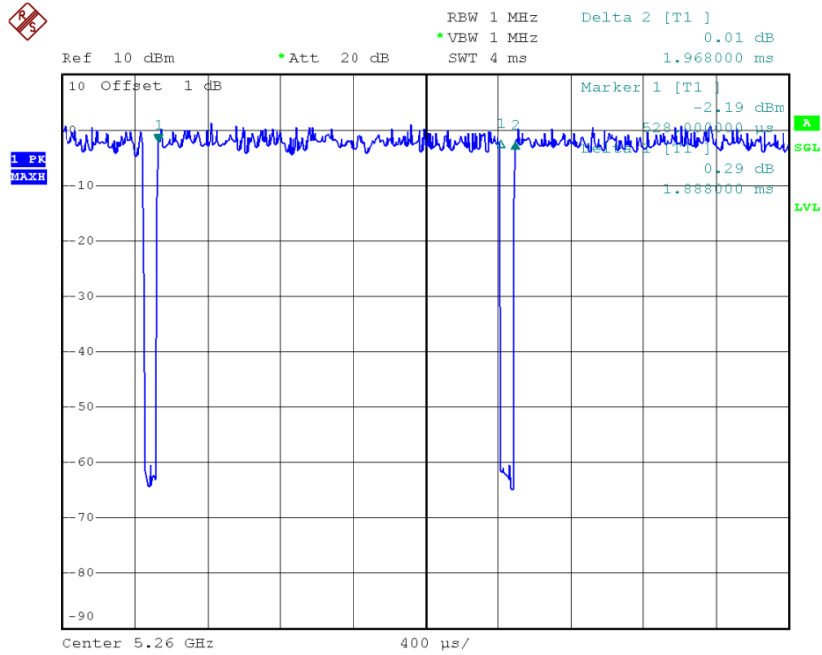

Date: 5.JUL.2016 11:42:00

Duty cycle: TX 5260 MHz

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$

$T_{\text{ON}}$ : 1.888 msec

$T_{\text{Total}}$ : 1.968 msec

Duty cycle: 95.93 %

$$\text{Duty Factor} = 10 \log(1/\text{Duty cycle})$$


Duty Factor = 0.18

Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle is less than 98 %, so, the output power and power density should be cacluated as

$$\text{Output Power} = \text{Measured power} + \text{Ducy factor}$$

$$\text{Power Spectral Density} = \text{Measured density} + \text{Duty factor}$$

TX N40 Mode\_DUTY CYCLE

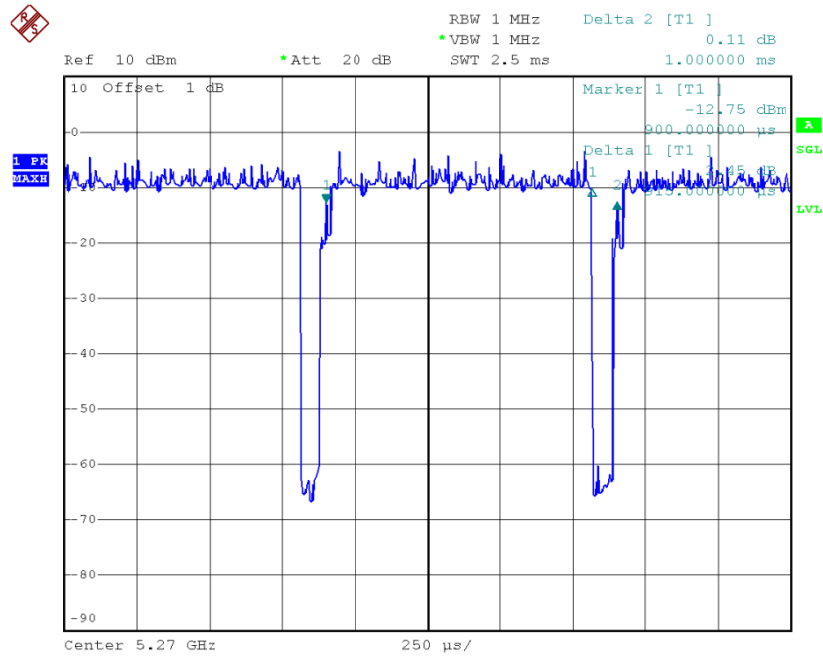

Date: 5.JUL.2016 11:46:31

Duty cycle: TX 5270 MHz

$$\text{Duty cycle} = T_{ON} / T_{Total}$$

$T_{ON}$ : 0.915 msec

$T_{Total}$ : 1.000 msec

Duty cycle: 91.5 %

$$\text{Duty Factor} = 10 \log(1/\text{Duty cycle})$$


Duty Factor = 0.39

Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is less than 98 %, so, the output power and power density should be calculated as

$$\text{Output Power} = \text{Measured power} + \text{Duty factor}$$

$$\text{Power Spectral Density} = \text{Measured density} + \text{Duty factor}$$

**TX AC20 Mode\_DUTY CYCLE**

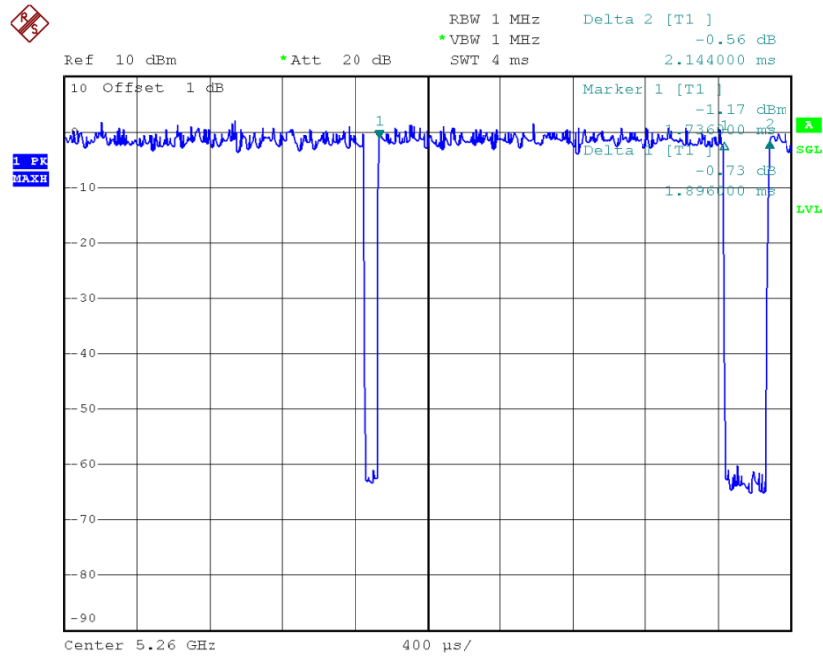

Date: 5.JUL.2016 11:49:30

Duty cycle: TX 5260 MHz

Duty cycle =  $T_{ON} / T_{Total}$

$T_{ON}$ : 1.896 msec

$T_{Total}$ : 2.144 msec

Duty cycle: 88.43 %

Duty Factor=  $10 \log(1/Duty \ cycle)$


Duty Factor = 0.53

Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle is less than 98 %, so, the output power and power density should be cacluated as

Output Power = Measured power + Ducus factor

Power Spectral Density = Measured density + Duty factor

TX AC40 Mode\_DUTY CYCLE

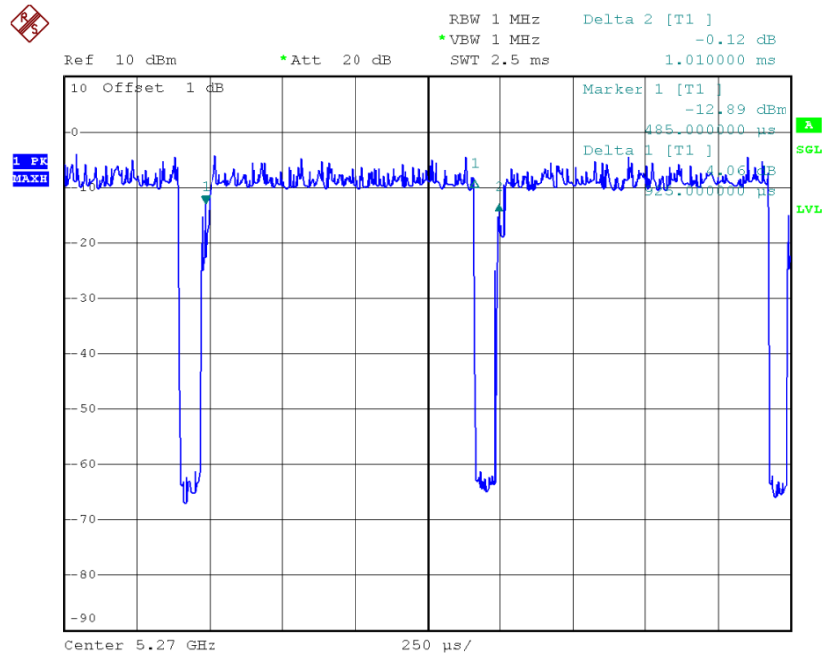

Date: 5.JUL.2016 11:54:21

Duty cycle: TX 5270 MHz

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$

$T_{\text{ON}}$ : 0.925 msec

$T_{\text{Total}}$ : 1.010 msec

Duty cycle: 91.58 %

$$\text{Duty Factor} = 10 \log(1/\text{Duty cycle})$$

Duty Factor = 0.38


Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is less than 98 %, so, the output power and power density should be calculated as

$$\text{Output Power} = \text{Measured power} + \text{Duty factor}$$

$$\text{Power Spectral Density} = \text{Measured density} + \text{Duty factor}$$



TX AC80 Mode\_DUTY CYCLE

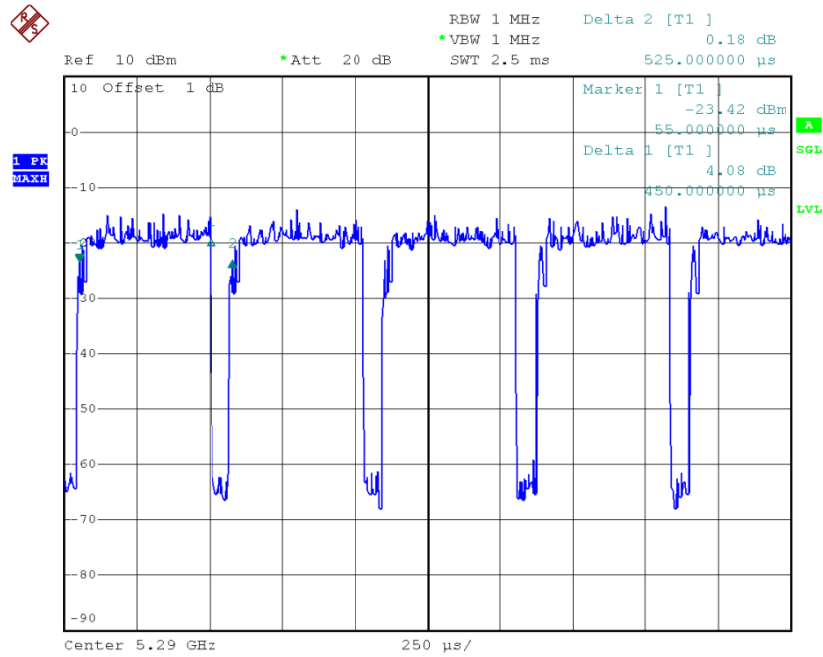

Date: 5.JUL.2016 13:37:32

Duty cycle: TX 5290 MHz

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$

$T_{\text{ON}}$ : 0.450 msec

$T_{\text{Total}}$ : 0.525 msec

Duty cycle: 82.71 %

$$\text{Duty Factor} = 10 \log(1/\text{Duty cycle})$$

Duty Factor = 0.67

Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is less than 98 %, so, the output power and power density should be calculated as

$$\text{Output Power} = \text{Measured power} + \text{Duty factor}$$


$$\text{Power Spectral Density} = \text{Measured density} + \text{Duty factor}$$

## ATTACHMENT E -BANDWIDTH

**Test Mode: UNII-2A/TX A Mode\_CH52/CH60/CH64**


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH52	5260	32.58	18.00
CH60	5300	33.18	18.10
CH64	5320	22.88	17.00

**TX CH52**

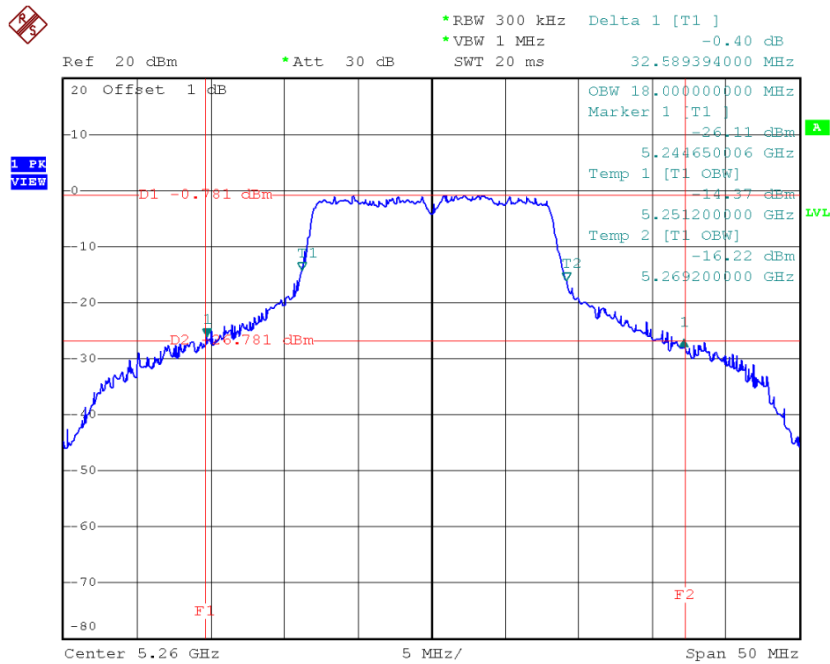


Date: 5.JUL.2016 11:35:15

**TX CH60**

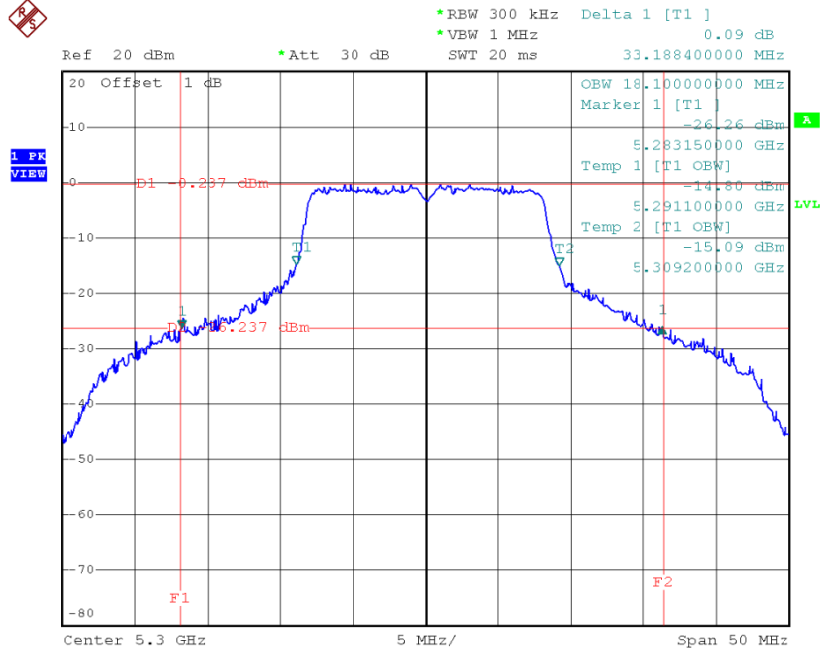

Date: 5.JUL.2016 11:39:15


**TX CH64**

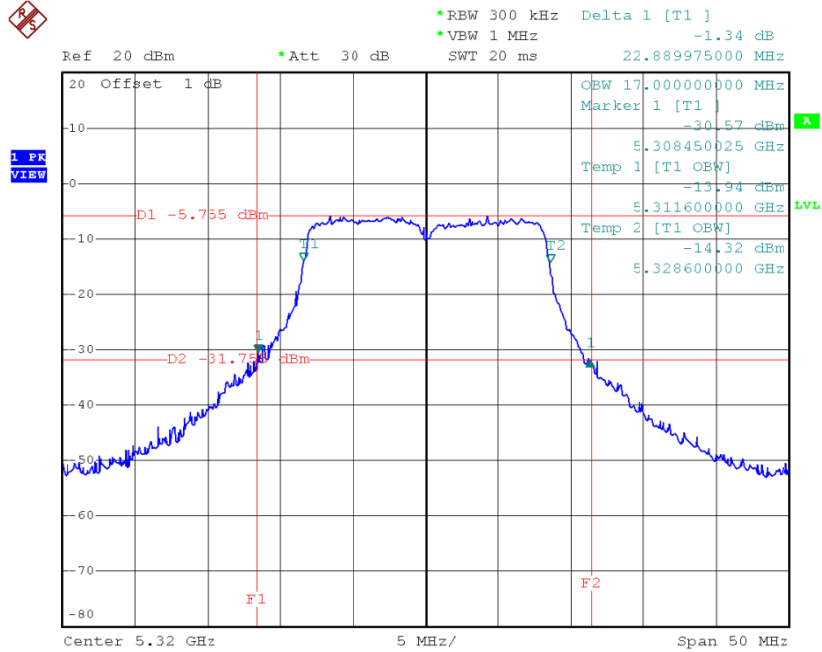

Date: 5.JUL.2016 11:40:36


**Test Mode: UNII-2A/TX N20 Mode\_CH52/CH60/CH64**

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH52	5260	34.59	19.20
CH60	5300	34.09	18.90
CH64	5320	23.69	18.00

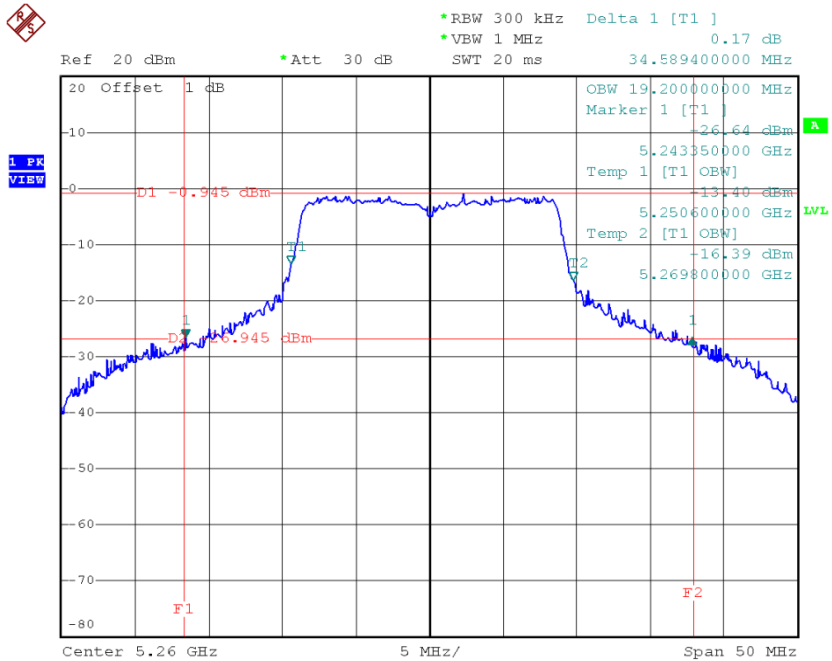**TX CH52**


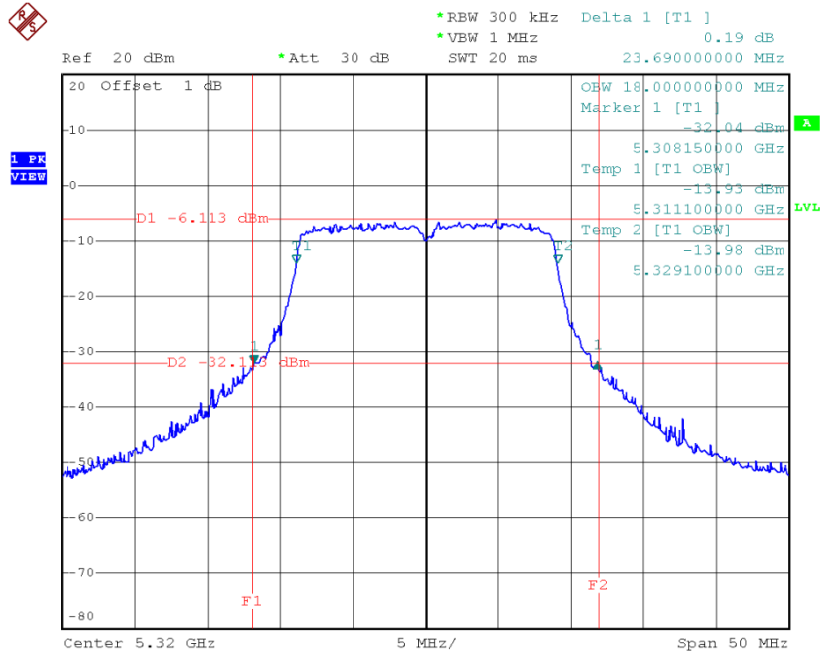
Date: 5.JUL.2016 11:41:48

**TX CH60**

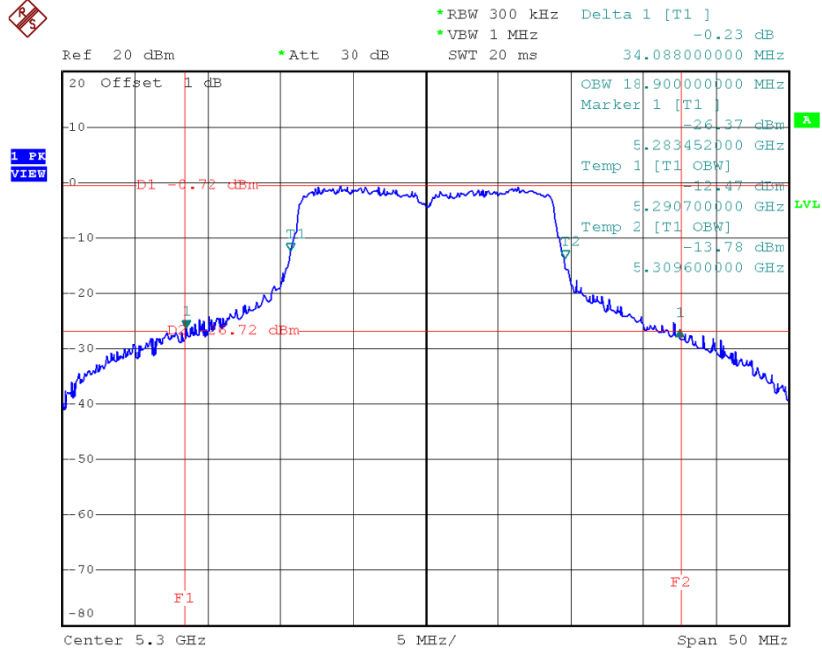

Date: 5.JUL.2016 11:43:15

**TX CH64**




Date: 5.JUL.2016 11:44:31

**Test Mode: UNII-2A/TX N40 Mode\_CH54/CH62**


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH54	5270	69.20	37.00
CH62	5310	43.70	36.40

### TX CH54

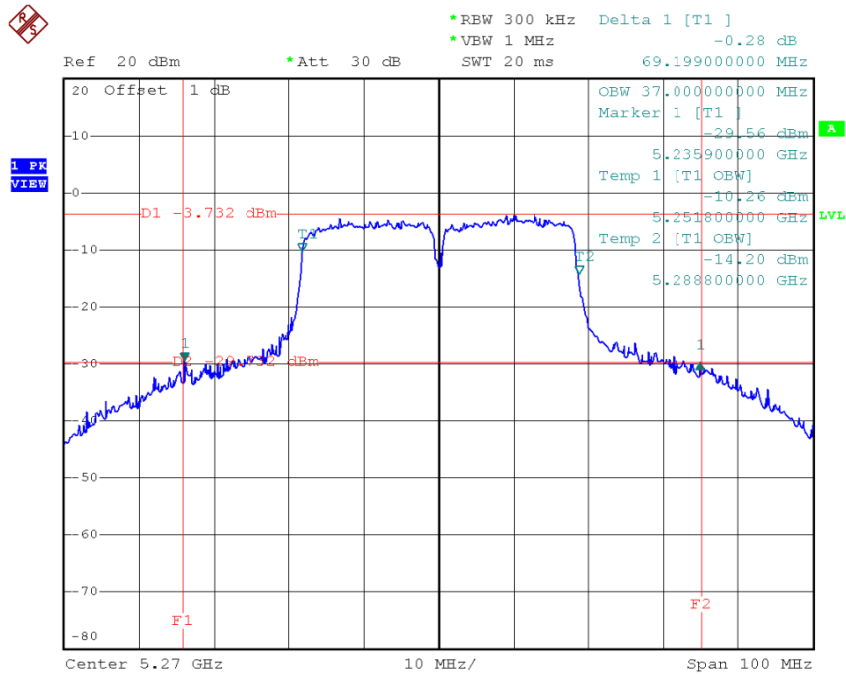

Date: 5.JUL.2016 11:45:56

### TX CH62

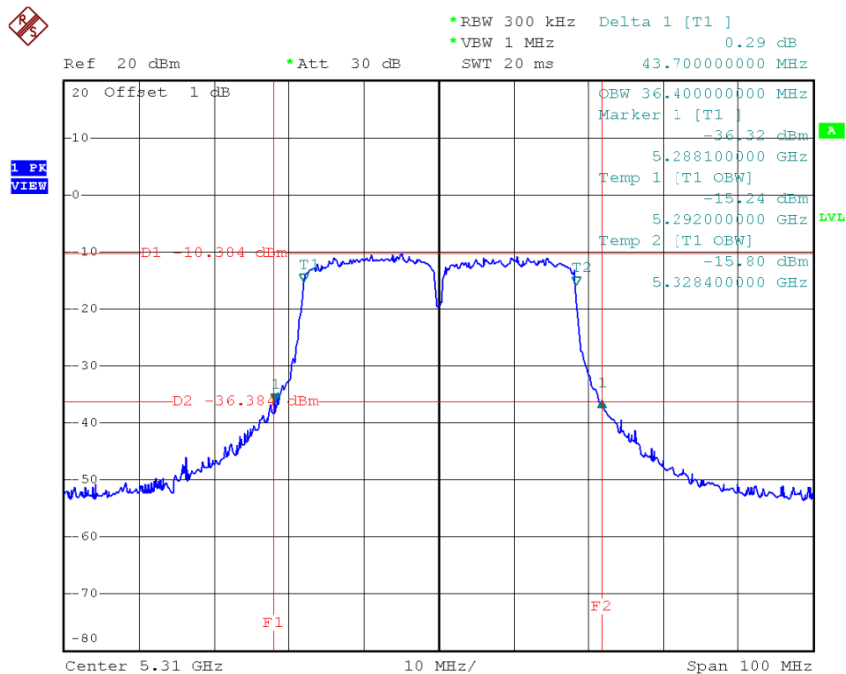


Date: 5.JUL.2016 11:47:34



**Test Mode: UNII-2C/TX A Mode\_CH100/CH116/CH140**


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH100	5500	29.78	17.50
CH116	5580	37.05	20.40
CH140	5700	22.38	16.90

**TX CH100**

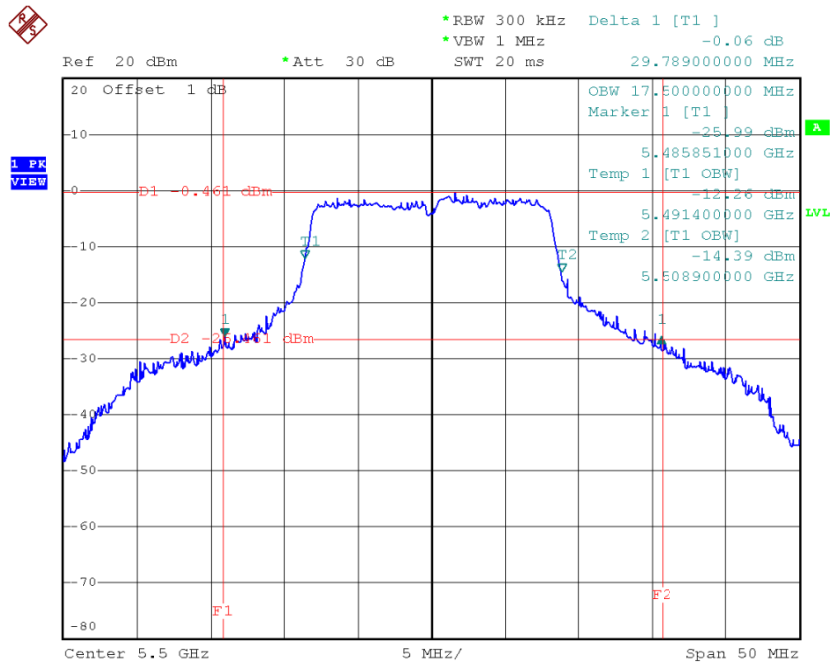


Date: 5.JUL.2016 14:41:48

**TX CH116**

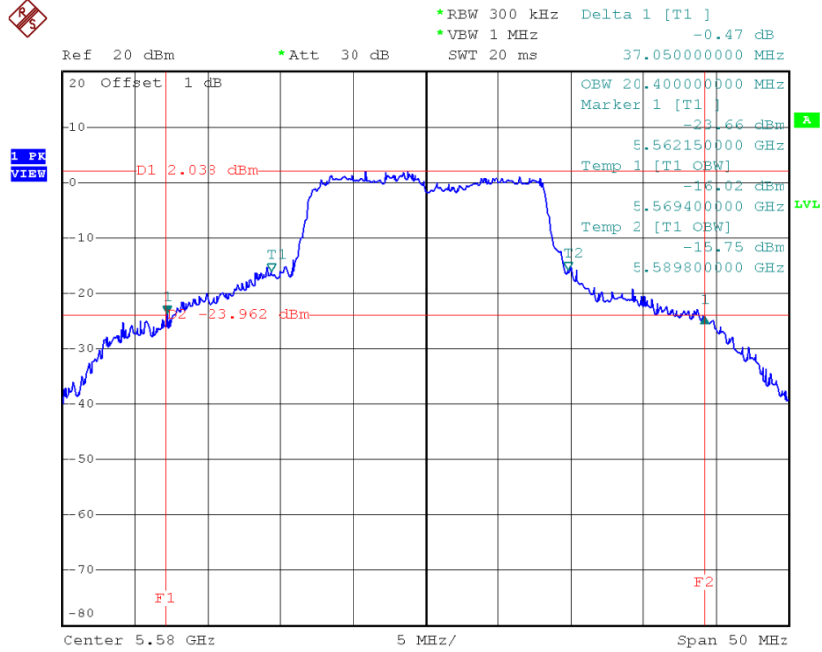

Date: 5.JUL.2016 14:49:58

**TX CH140**

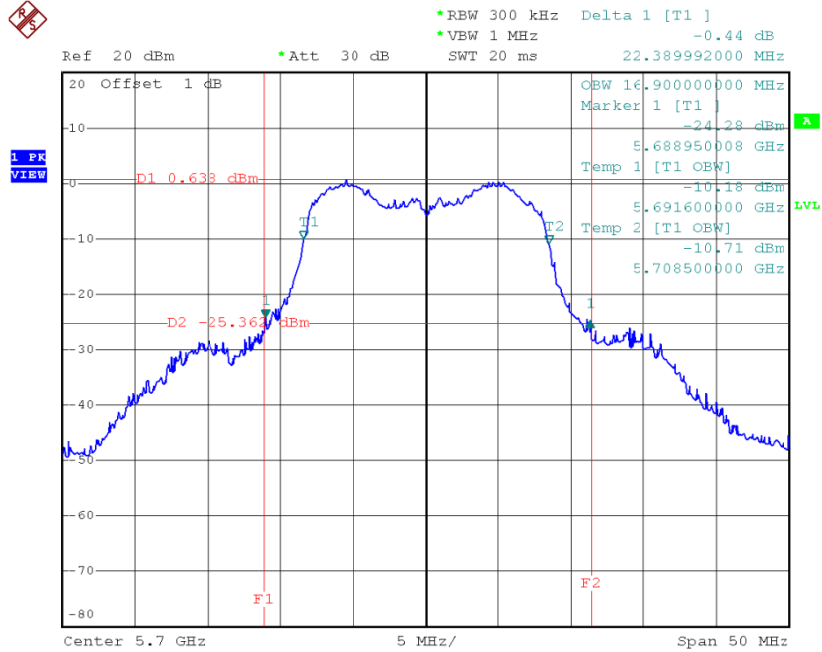


Date: 5.JUL.2016 14:51:23

**Test Mode: UNII-2C/TX N20 Mode\_CH100/CH116/CH140**


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH100	5500	32.25	18.60
CH116	5580	38.79	20.70
CH140	5700	23.95	17.80

**TX CH100**

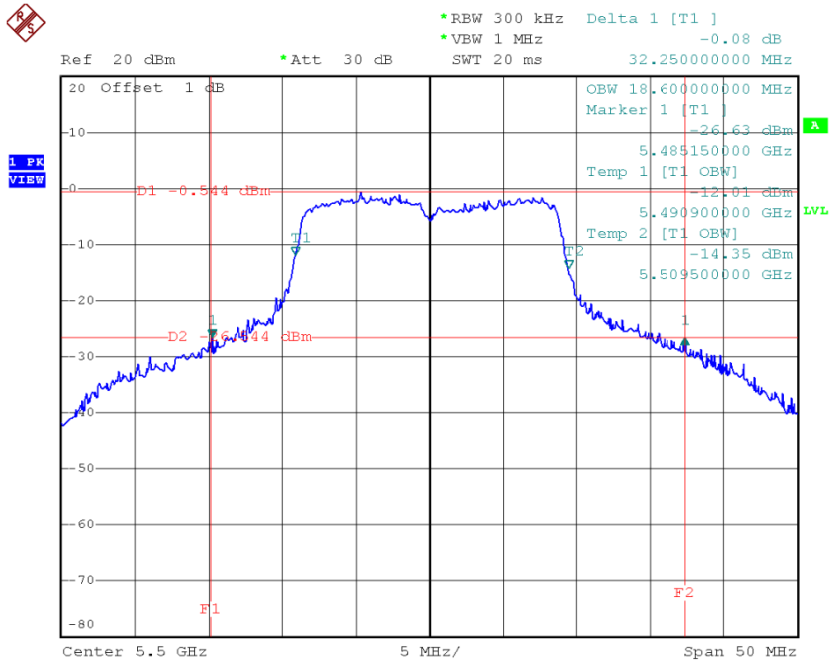


Date: 5.JUL.2016 14:53:33

### TX CH116

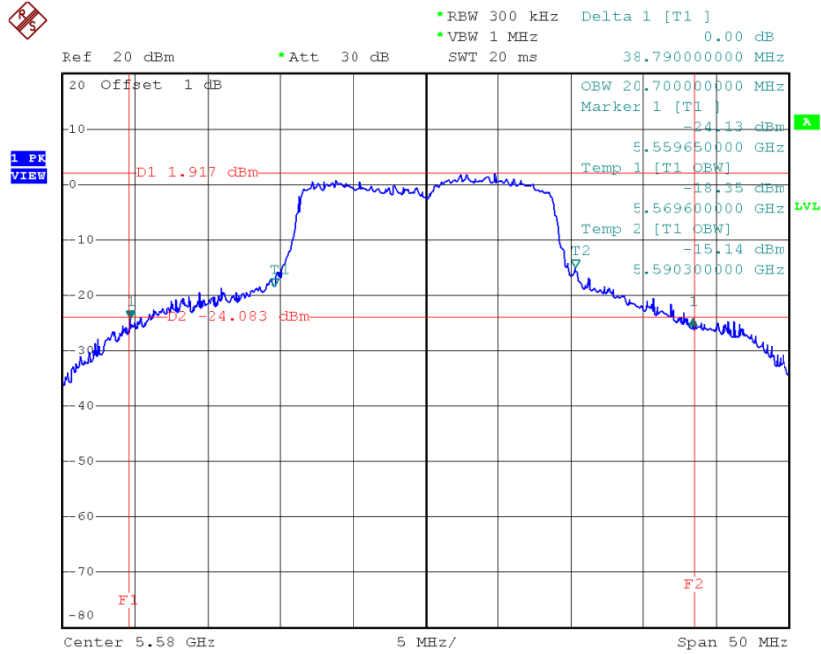

Date: 5.JUL.2016 14:55:28

### TX CH140

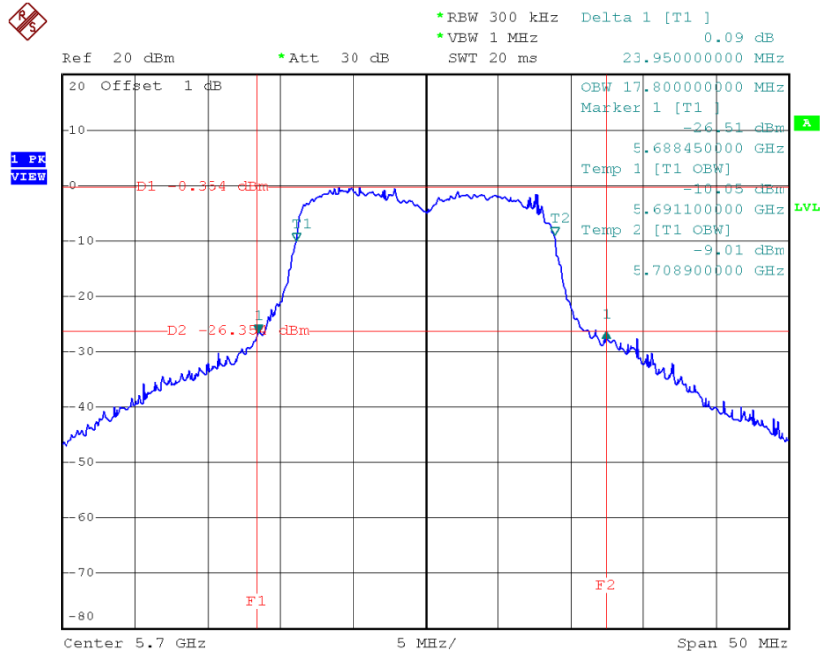


Date: 5.JUL.2016 14:59:35

**Test Mode: UNII-2C/TX N40 Mode\_CH102/CH110/CH134**


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH102	5510	44.59	36.40
CH110	5550	72.19	37.60
CH134	5670	61.50	36.60

**TX CH102**

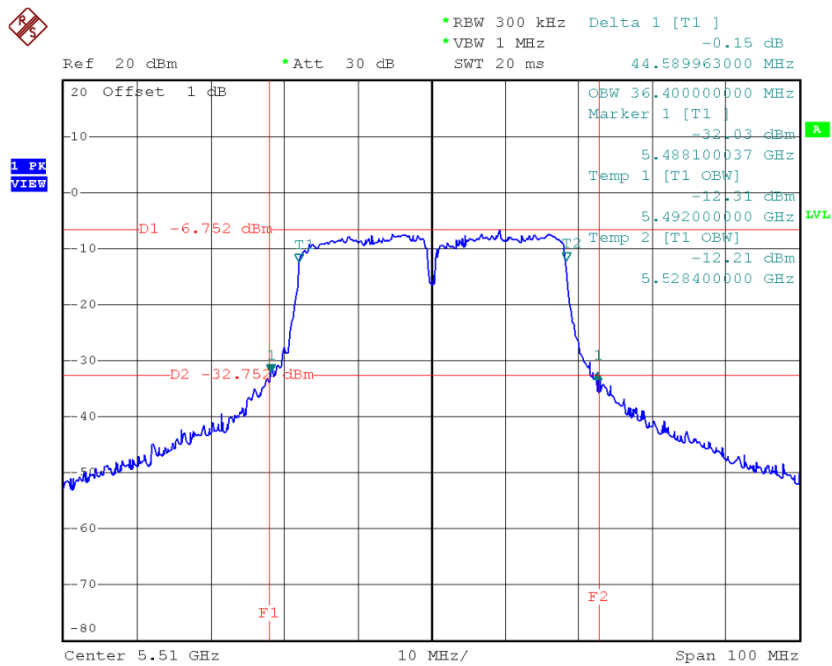


Date: 5.JUL.2016 15:02:12

TX CH110

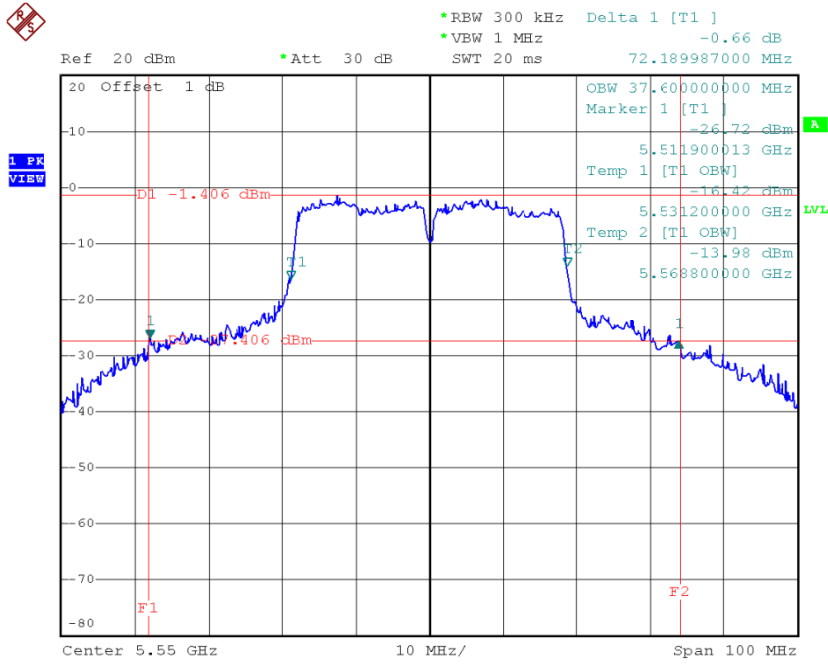

Date: 5.JUL.2016 15:03:53


TX CH134

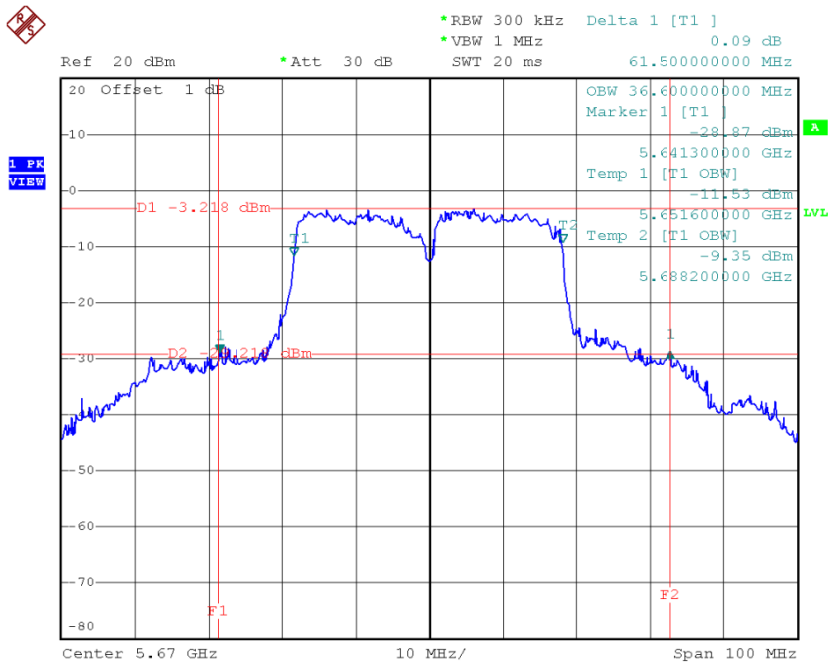

Date: 5.JUL.2016 15:05:24


**Test Mode: UNII-2A/TX AC20 Mode\_CH52/CH60/CH64**

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH52	5260	34.98	18.80
CH60	5300	34.75	18.90
CH64	5320	23.89	18.10

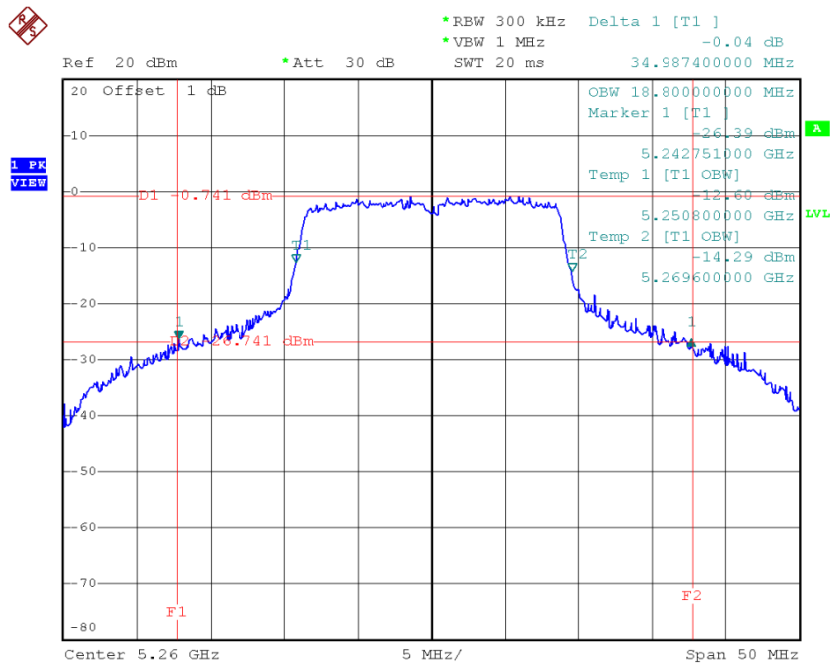**TX CH52**


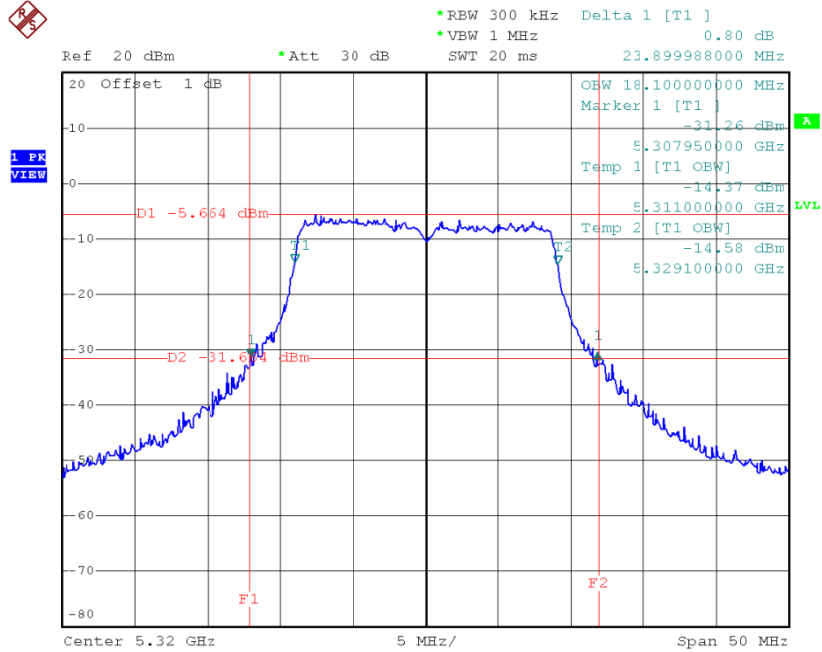
Date: 5.JUL.2016 11:48:54

**TX CH60**

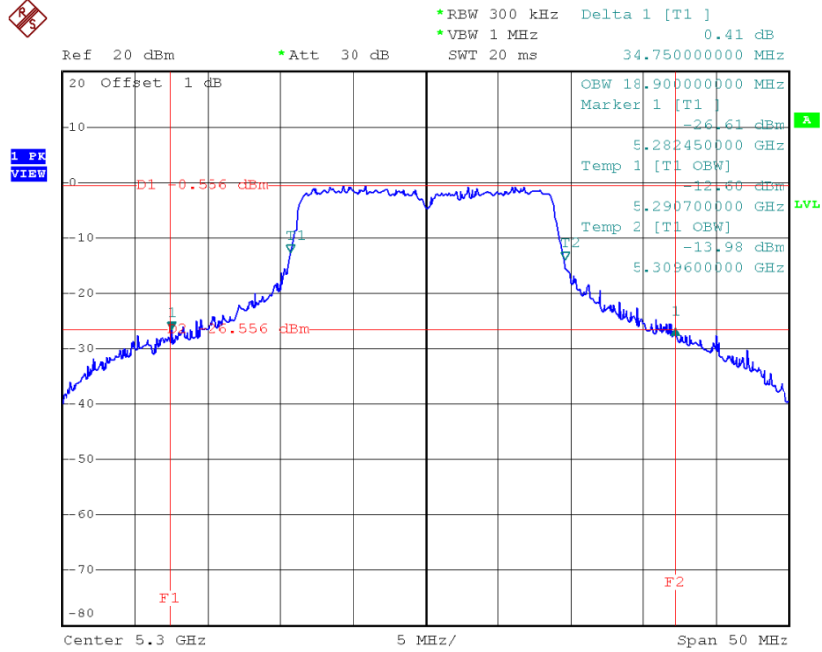

Date: 5.JUL.2016 11:51:26

**TX CH64**




Date: 5.JUL.2016 11:52:23



**Test Mode: UNII-2A/TX AC40 Mode\_CH54/CH62**


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH54	5270	66.00	37.00
CH62	5310	44.39	36.40

TX CH54

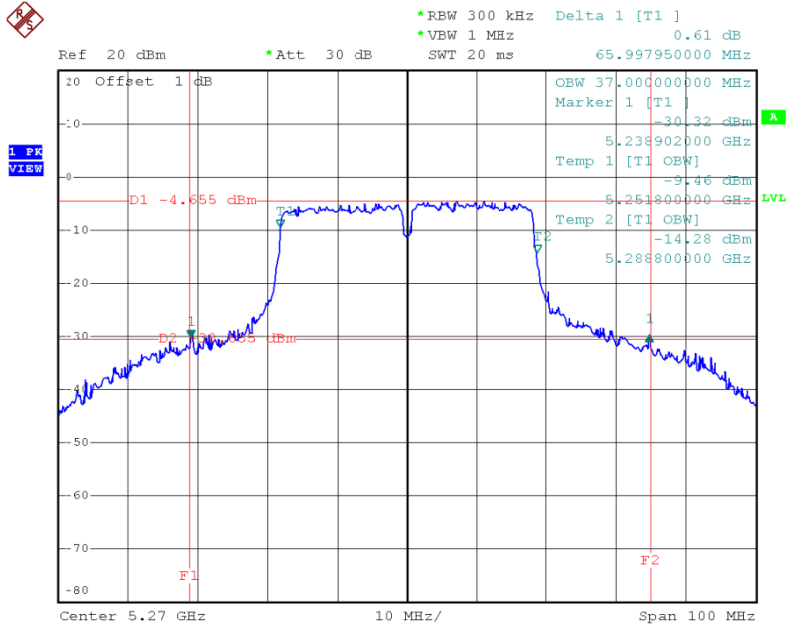

Date: 5.JUL.2016 11:53:46

TX CH62

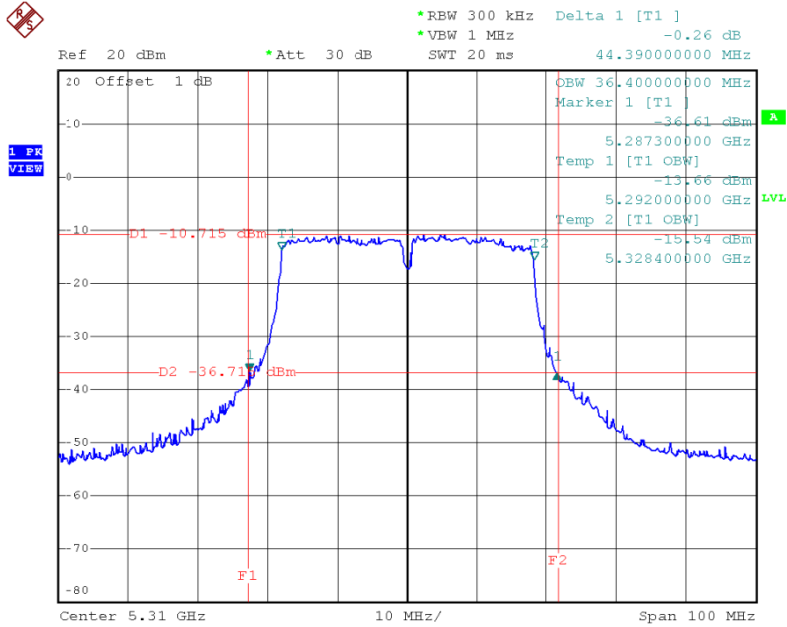


Date: 5.JUL.2016 11:55:06

**Test Mode: UNII-2A/TX AC80 Mode\_CH58**

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH58	5290	84.20	76.00

**TX CH58**

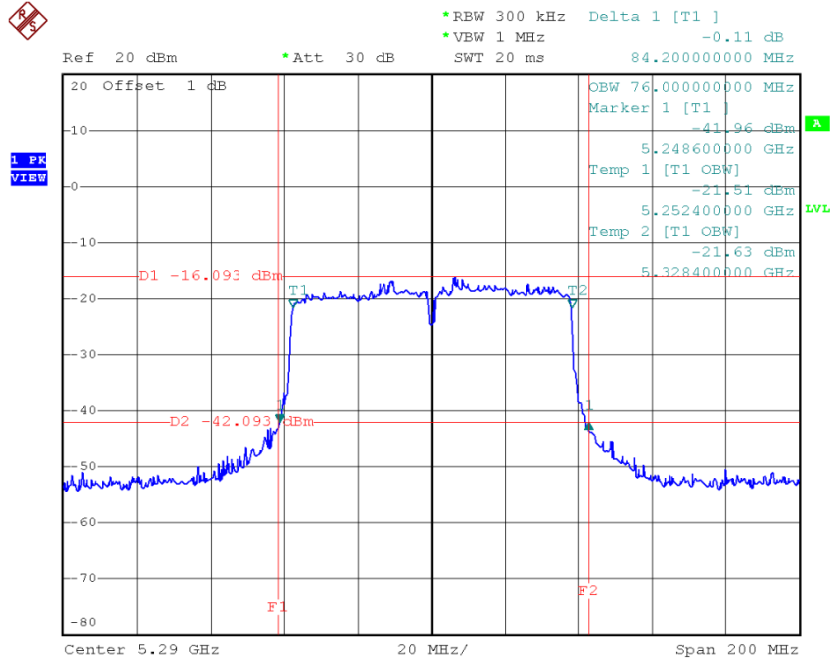


Date: 5.JUL.2016 11:56:52

**Test Mode: UNII-2C/TX AC20 Mode\_CH100/CH116/CH140**


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH100	5500	30.45	18.50
CH116	5580	30.08	20.80
CH140	5700	23.71	18.20

**TX CH100**

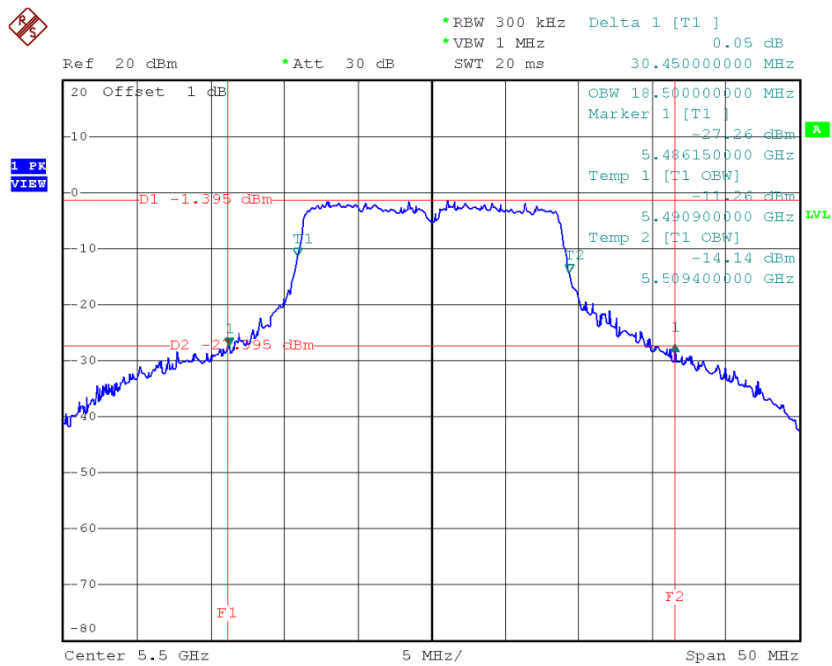


Date: 5.JUL.2016 15:08:04

**TX CH116**

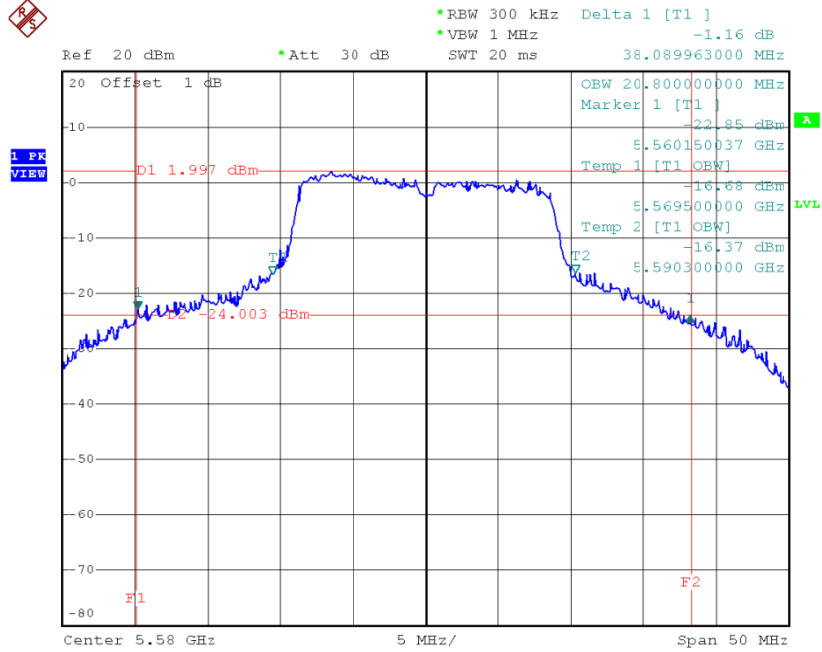

Date: 5.JUL.2016 15:09:28


**TX CH140**

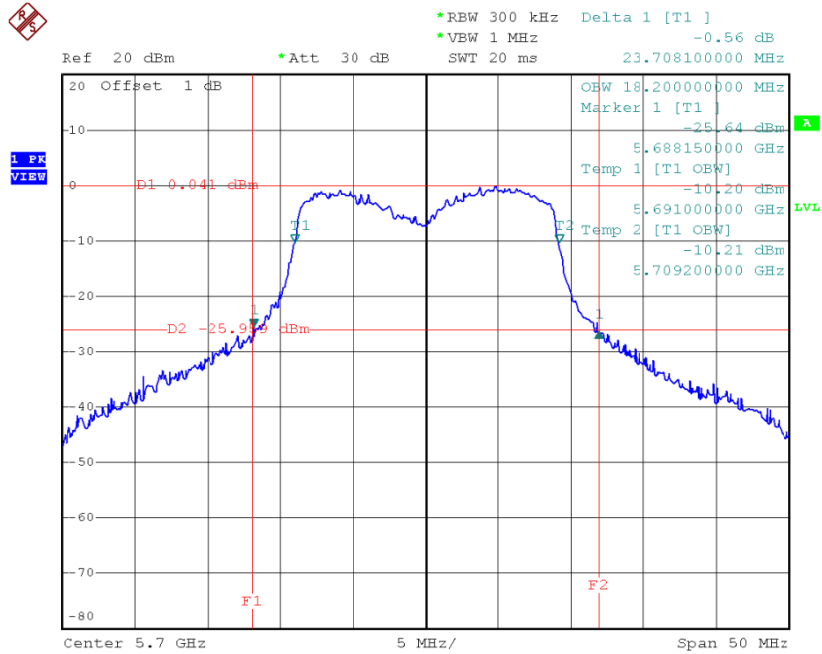

Date: 5.JUL.2016 15:10:28




### TX CH110

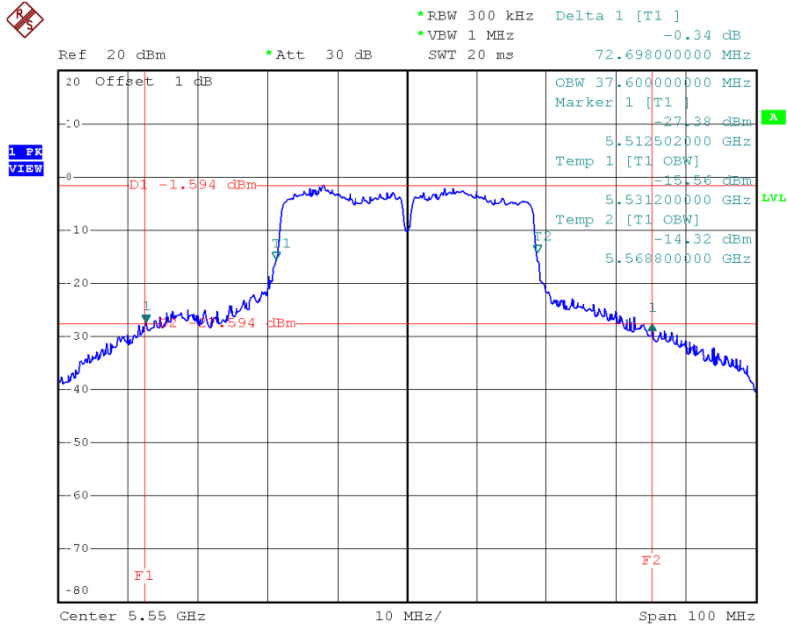

Date: 5.JUL.2016 15:13:38

### TX CH134

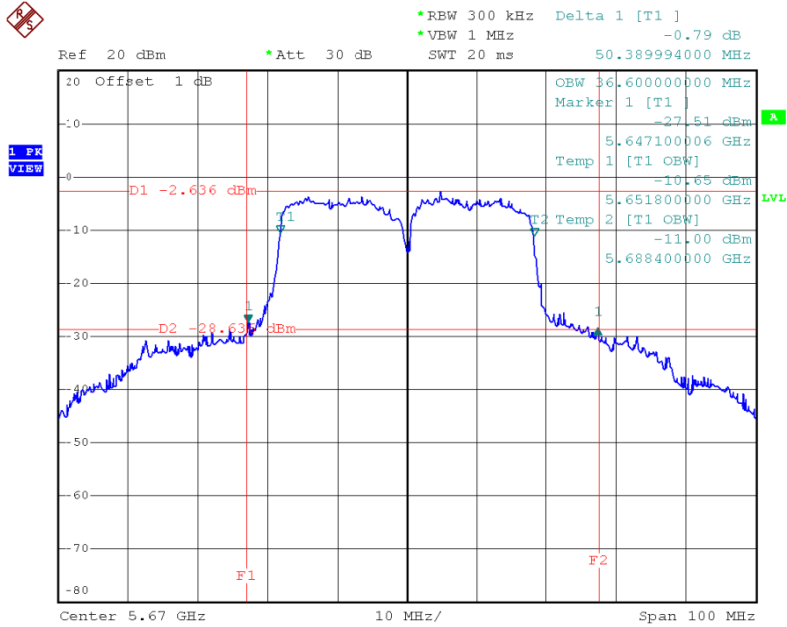


Date: 5.JUL.2016 15:16:12

**Test Mode: UNII-2C/TX AC80 Mode\_CH106**

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH106	5530	84.79	76.00
CH122	5610	126.79	76.40




**TX CH106**

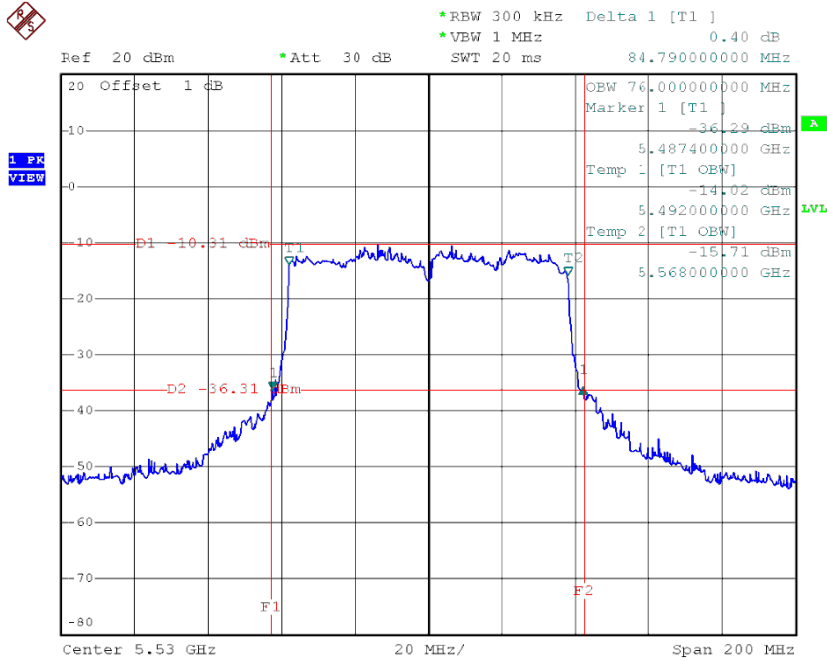

Date: 5.JUL.2016 15:21:02

**TX CH122**

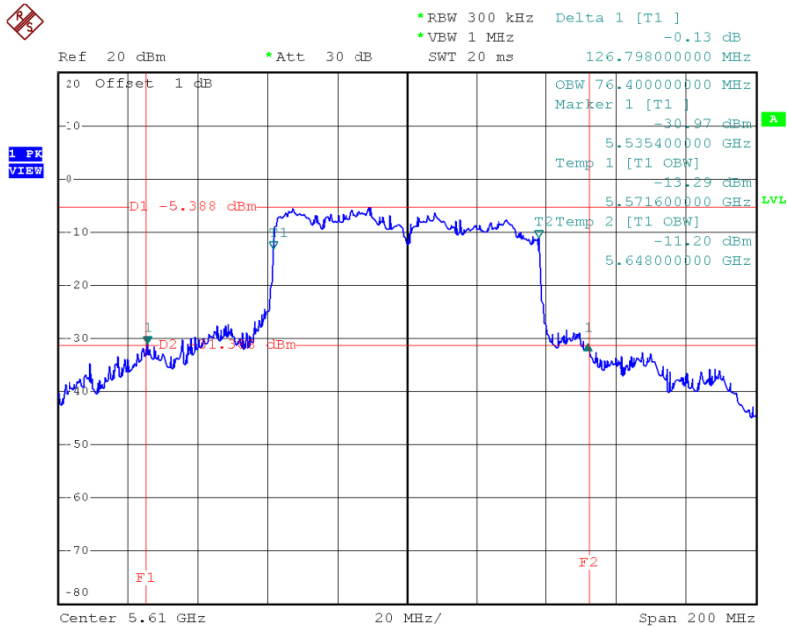

Date: 5.JUL.2016 15:18:37

## ATTACHMENT F - MAXIMUM OUTPUT POWER

**Test Mode: UNII-2A/TX A Mode\_ANT 1**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	9.92	0.31	10.23	23.24	0.21
CH60	5300	10.05	0.31	10.36	23.24	0.21
CH64	5320	3.00	0.31	3.31	23.24	0.21

**Test Mode: UNII-2A/TX A Mode\_ANT 2**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	10.66	0.31	10.97	23.24	0.21
CH60	5300	11.06	0.31	11.37	23.24	0.21
CH64	5320	4.28	0.31	4.59	23.24	0.21

**Test Mode: UNII-2A/TX A Mode\_ANT 3**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	15.98	0.31	16.29	23.24	0.21
CH60	5300	14.85	0.31	15.16	23.24	0.21
CH64	5320	9.20	0.31	9.51	23.24	0.21

**Test Mode: UNII-2A/TX A Mode\_Total**

Channel	Frequency (MHz)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	18.17	23.24	0.21
CH60	5300	17.59	23.24	0.21
CH64	5320	11.45	23.24	0.21

**Test Mode: UNII-2A/TX N20 Mode\_ANT 1**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	9.98	0.18	10.16	23.24	0.21
CH60	5300	10.14	0.18	10.32	23.24	0.21
CH64	5320	3.00	0.18	3.18	23.24	0.21

**Test Mode: UNII-2A/TX N20 Mode\_ANT 2**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	10.93	0.18	11.11	23.24	0.21
CH60	5300	11.16	0.18	11.34	23.24	0.21
CH64	5320	4.29	0.18	4.47	23.24	0.21

**Test Mode: UNII-2A/TX N20 Mode\_ANT 3**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	15.14	0.18	15.32	23.24	0.21
CH60	5300	14.96	0.18	15.14	23.24	0.21
CH64	5320	10.60	0.18	10.78	23.24	0.21

**Test Mode: UNII-2A/TX N20 Mode\_Total**

Channel	Frequency (MHz)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	17.58	23.24	0.21
CH60	5300	17.56	23.24	0.21
CH64	5320	12.27	23.24	0.21

**Test Mode: UNII-2A/TX N40 Mode\_ANT 1**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	8.86	0.39	9.25	23.24	0.21
CH62	5310	1.96	0.39	2.35	23.24	0.21

**Test Mode: UNII-2A/TX N40 Mode\_ANT 2**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	9.63	0.39	10.02	23.24	0.21
CH62	5310	3.07	0.39	3.46	23.24	0.21

**Test Mode: UNII-2A/TX N40 Mode\_ANT 3**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	13.52	0.39	13.91	23.24	0.21
CH62	5310	7.78	0.39	8.17	23.24	0.21

**Test Mode: UNII-2A/TX N40 Mode\_Total**

Channel	Frequency (MHz)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	16.34	23.24	0.21
CH62	5310	10.21	23.24	0.21

**Test Mode: UNII-2C/TX A Mode\_ANT 1**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	5.89	0.31	6.20	23.24	0.21
CH116	5580	8.47	0.31	8.78	23.24	0.21
CH140	5700	7.95	0.31	8.26	23.24	0.21

**Test Mode: UNII-2C/TX A Mode\_ANT 2**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	2.52	0.31	2.83	23.24	0.21
CH116	5580	7.19	0.31	7.50	23.24	0.21
CH140	5700	4.25	0.31	4.56	23.24	0.21

**Test Mode: UNII-2C/TX A Mode\_ANT 3**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	9.09	0.31	9.40	23.24	0.21
CH116	5580	9.73	0.31	10.04	23.24	0.21
CH140	5700	5.85	0.31	6.16	23.24	0.21

**Test Mode: UNII-2C/TX A Mode\_Total**

Channel	Frequency (MHz)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	11.71	23.24	0.21
CH116	5580	13.67	23.24	0.21
CH140	5700	11.37	23.24	0.21

**Test Mode: UNII-2C/TX N20 Mode\_ANT 1**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	5.93	0.18	6.11	23.24	0.21
CH116	5580	8.69	0.18	8.87	23.24	0.21
CH140	5700	7.86	0.18	8.04	23.24	0.21

**Test Mode: UNII-2C/TX N20 Mode\_ANT 2**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	2.48	0.18	2.66	23.24	0.21
CH116	5580	8.15	0.18	8.33	23.24	0.21
CH140	5700	4.26	0.18	4.44	23.24	0.21

**Test Mode: UNII-2C/TX N20 Mode\_ANT 3**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	9.06	0.18	9.24	23.24	0.21
CH116	5580	9.72	0.18	9.90	23.24	0.21
CH140	5700	5.80	0.18	5.98	23.24	0.21

**Test Mode: UNII-2C/TX N20 Mode\_Total**

Channel	Frequency (MHz)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	11.56	23.24	0.21
CH116	5580	13.85	23.24	0.21
CH140	5700	11.18	23.24	0.21

**Test Mode: UNII-2C/TX N40 Mode\_ANT 1**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	2.37	0.39	2.76	23.24	0.21
CH110	5550	8.01	0.39	8.40	23.24	0.21
CH134	5670	9.22	0.39	9.61	23.24	0.21

**Test Mode: UNII-2C/TX N40 Mode\_ANT 2**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	-0.78	0.39	-0.39	23.24	0.21
CH110	5550	5.91	0.39	6.30	23.24	0.21
CH134	5670	7.12	0.39	7.51	23.24	0.21

**Test Mode: UNII-2C/TX N40 Mode\_ANT 3**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	5.18	0.39	5.57	23.24	0.21
CH110	5550	9.83	0.39	10.22	23.24	0.21
CH134	5670	8.16	0.39	8.55	23.24	0.21

**Test Mode: UNII-2C/TX N40 Mode\_Total**

Channel	Frequency (MHz)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	8.06	23.24	0.21
CH110	5550	13.36	23.24	0.21
CH134	5670	13.41	23.24	0.21



**Test Mode: UNII-2A/TX AC20 Mode\_ANT 1**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	9.91	0.53	10.44	23.24	0.21
CH60	5300	10.09	0.53	10.62	23.24	0.21
CH64	5320	2.95	0.53	3.48	23.24	0.21

**Test Mode: UNII-2A/TX AC20 Mode\_ANT 2**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	10.80	0.53	11.33	23.24	0.21
CH60	5300	11.03	0.53	11.56	23.24	0.21
CH64	5320	4.36	0.53	4.89	23.24	0.21

**Test Mode: UNII-2A/TX AC20 Mode\_ANT 3**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	15.15	0.53	15.68	23.24	0.21
CH60	5300	15.01	0.53	15.54	23.24	0.21
CH64	5320	10.68	0.53	11.21	23.24	0.21

**Test Mode: UNII-2A/TX AC20 Mode\_Total**

Channel	Frequency (MHz)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	17.90	23.24	0.21
CH60	5300	17.90	23.24	0.21
CH64	5320	12.68	23.24	0.21

**Test Mode: UNII-2A/TX AC40 Mode\_ANT 1**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	8.97	0.38	9.35	23.24	0.21
CH62	5310	1.50	0.38	1.88	23.24	0.21

**Test Mode: UNII-2A/TX AC40 Mode\_ANT 2**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	9.51	0.38	9.89	23.24	0.21
CH62	5310	2.58	0.38	2.96	23.24	0.21

**Test Mode: UNII-2A/TX AC40 Mode\_ANT 3**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	13.50	0.38	13.88	23.24	0.21
CH62	5310	7.40	0.38	7.78	23.24	0.21

**Test Mode: UNII-2A/TX AC40 Mode\_Total**

Channel	Frequency (MHz)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	16.32	23.24	0.21
CH62	5310	9.79	23.24	0.21

**Test Mode: UNII-2A/TX AC80 Mode\_ANT 1**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH55	5290	-2.90	0.67	-2.23	23.24	0.21

**Test Mode: UNII-2A/TX AC80 Mode\_ANT 2**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH55	5290	-1.73	0.67	-1.06	23.24	0.21

**Test Mode: UNII-2A/TX AC80 Mode\_ANT 3**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH55	5290	2.94	0.67	3.61	23.24	0.21

**Test Mode: UNII-2A/TX AC80 Mode\_Total**

Channel	Frequency (MHz)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH55	5290	5.66	23.24	0.21

**Test Mode: UNII-2C/TX AC20 Mode\_ANT 1**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	5.93	0.53	6.46	23.24	0.21
CH116	5580	8.61	0.53	9.14	23.24	0.21
CH140	5700	7.38	0.53	7.91	23.24	0.21

**Test Mode: UNII-2C/TX AC20 Mode\_ANT 2**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	2.44	0.53	2.97	23.24	0.21
CH116	5580	8.01	0.53	8.54	23.24	0.21
CH140	5700	4.39	0.53	4.92	23.24	0.21

**Test Mode: UNII-2C/TX AC20 Mode\_ANT 3**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	9.08	0.53	9.61	23.24	0.21
CH116	5580	9.71	0.53	10.24	23.24	0.21
CH140	5700	5.80	0.53	6.33	23.24	0.21

**Test Mode: UNII-2C/TX AC20 Mode\_Total**

Channel	Frequency (MHz)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	11.92	23.24	0.21
CH116	5580	14.14	23.24	0.21
CH140	5700	11.33	23.24	0.21

**Test Mode: UNII-2C/TX AC40 Mode\_ANT 1**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	2.43	0.38	2.81	23.24	0.21
CH110	5550	7.95	0.38	8.33	23.24	0.21
CH134	5670	9.00	0.38	9.38	23.24	0.21

**Test Mode: UNII-2C/TX AC40 Mode\_ANT 2**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	-0.96	0.38	-0.58	23.24	0.21
CH110	5550	5.86	0.38	6.24	23.24	0.21
CH134	5670	7.37	0.38	7.75	23.24	0.21

**Test Mode: UNII-2C/TX AC40 Mode\_ANT 3**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	5.18	0.38	5.56	23.24	0.21
CH110	5550	9.77	0.38	10.15	23.24	0.21
CH134	5670	8.15	0.38	8.53	23.24	0.21

**Test Mode: UNII-2C/TX AC40 Mode\_Total**

Channel	Frequency (MHz)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	8.05	23.24	0.21
CH110	5550	13.30	23.24	0.21
CH134	5670	13.38	23.24	0.21

**Test Mode: UNII-2C/TX AC80 Mode\_ANT 1**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	7.56	0.67	8.23	23.24	0.21
CH122	5610	7.38	0.67	8.05	23.24	0.21

**Test Mode: UNII-2C/TX AC80 Mode\_ANT 2**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	5.06	0.67	5.73	23.24	0.21
CH122	5610	6.98	0.67	7.65	23.24	0.21

**Test Mode: UNII-2C/TX AC80 Mode\_ANT 3**

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	9.78	0.67	10.45	23.24	0.21
CH122	5610	9.07	0.67	9.74	23.24	0.21


**Test Mode: UNII-2C/TX AC80 Mode\_Total**

Channel	Frequency (MHz)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	13.32	23.24	0.21
CH122	5610	13.35	23.24	0.21

## ATTACHMENT G - POWER SPECTRAL DENSITY

**Test Mode: UNII-2A/ TX A Mode\_CH52/CH60/CH64\_ANT 1**


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	-3.86	0.31	-3.55	10.24
CH60	5300	-3.57	0.31	-3.26	10.24
CH64	5320	-9.24	0.31	-8.93	10.24

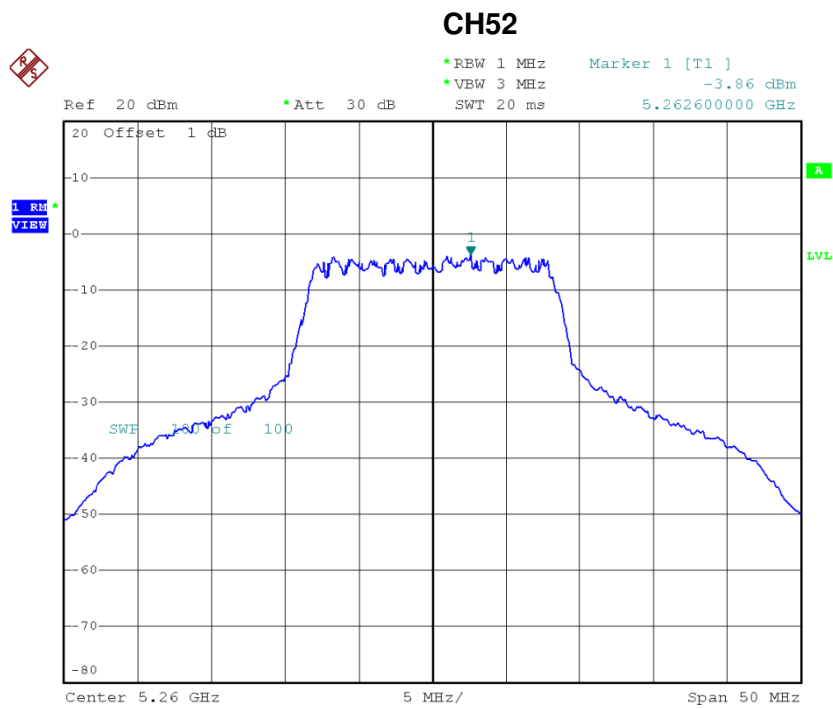

Date: 5.JUL.2016 11:35:23




### CH60

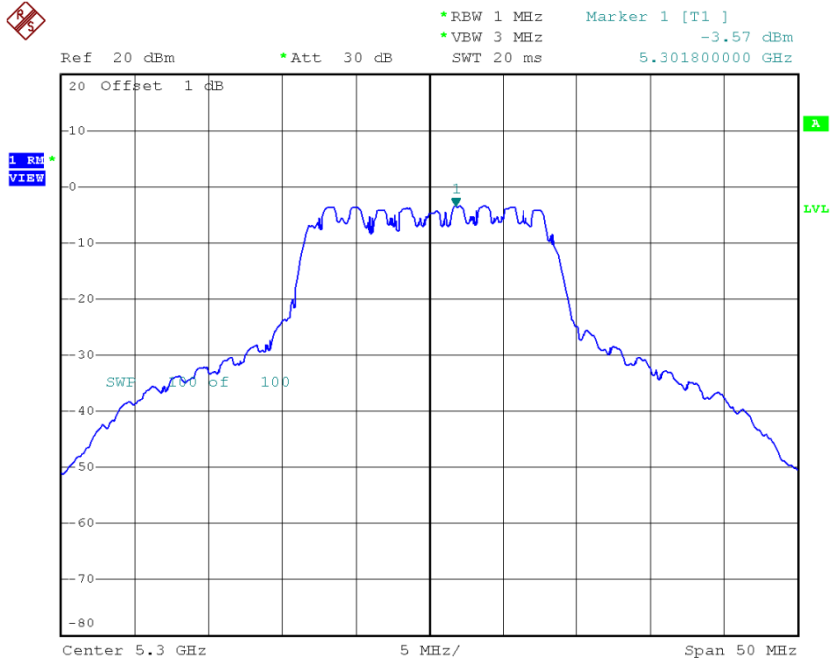

Date: 5.JUL.2016 11:39:23


### CH64

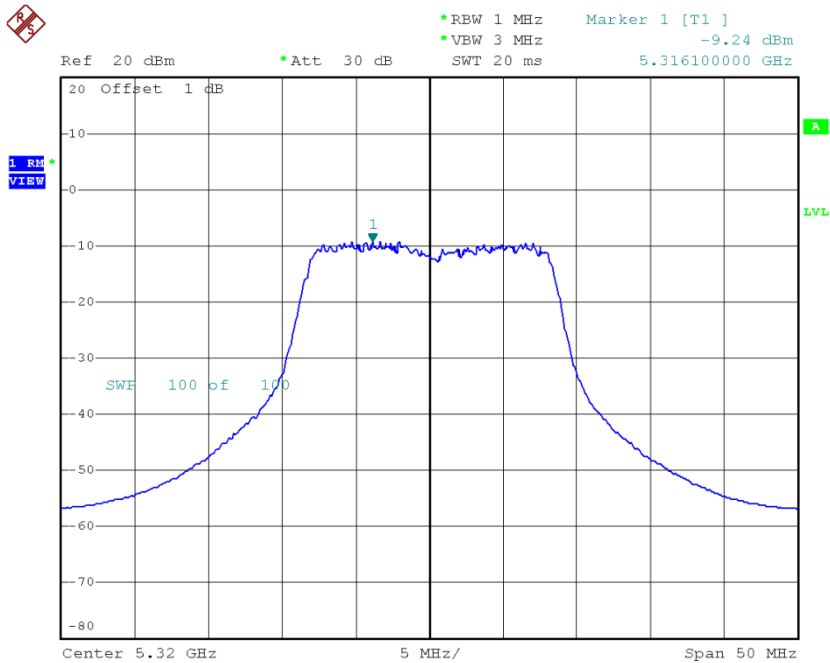

Date: 5.JUL.2016 11:40:45


**Test Mode: UNII-2A/ TX A Mode\_CH52/CH60/CH64\_ANT 2**

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	-1.72	0.31	-1.41	10.24
CH60	5300	-1.39	0.31	-1.08	10.24
CH64	5320	-6.27	0.31	-5.96	10.24

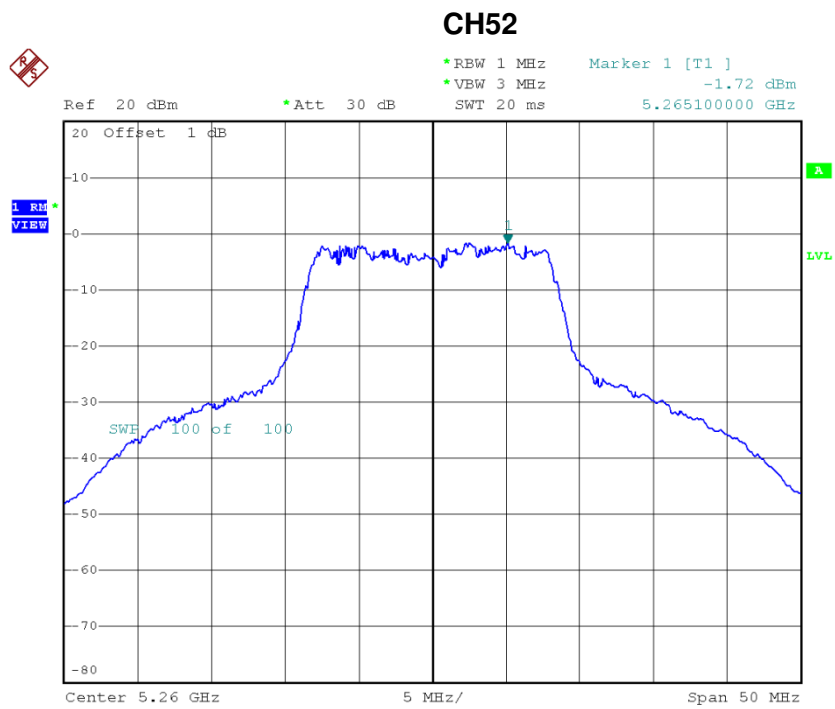


Date: 5.JUL.2016 13:04:52

### CH60

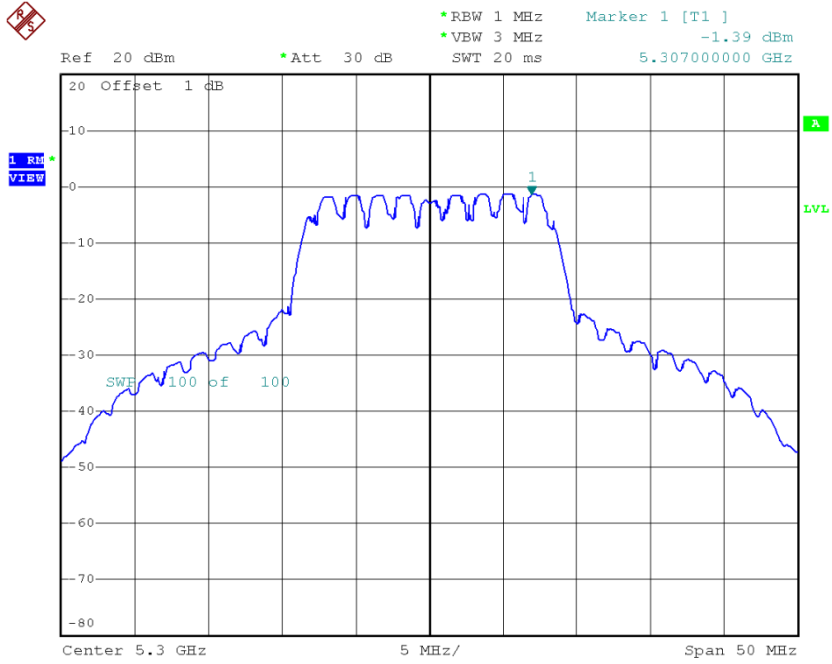

Date: 5.JUL.2016 13:09:19


### CH64

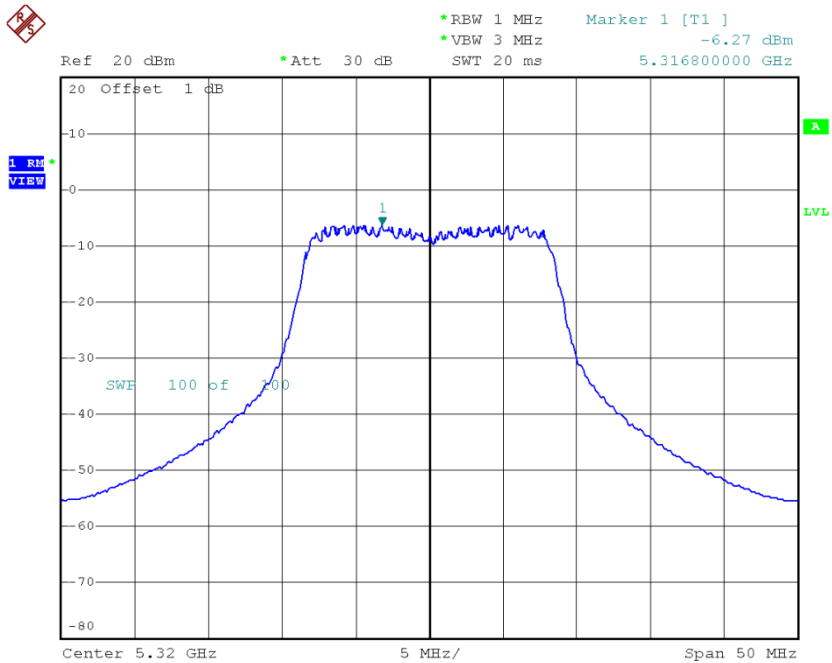

Date: 5.JUL.2016 13:10:27


**Test Mode: UNII-2A/ TX A Mode\_CH52/CH60/CH64\_ANT 3**

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	-0.23	0.31	0.08	10.24
CH60	5300	-0.12	0.31	0.19	10.24
CH64	5320	-7.34	0.31	-7.03	10.24

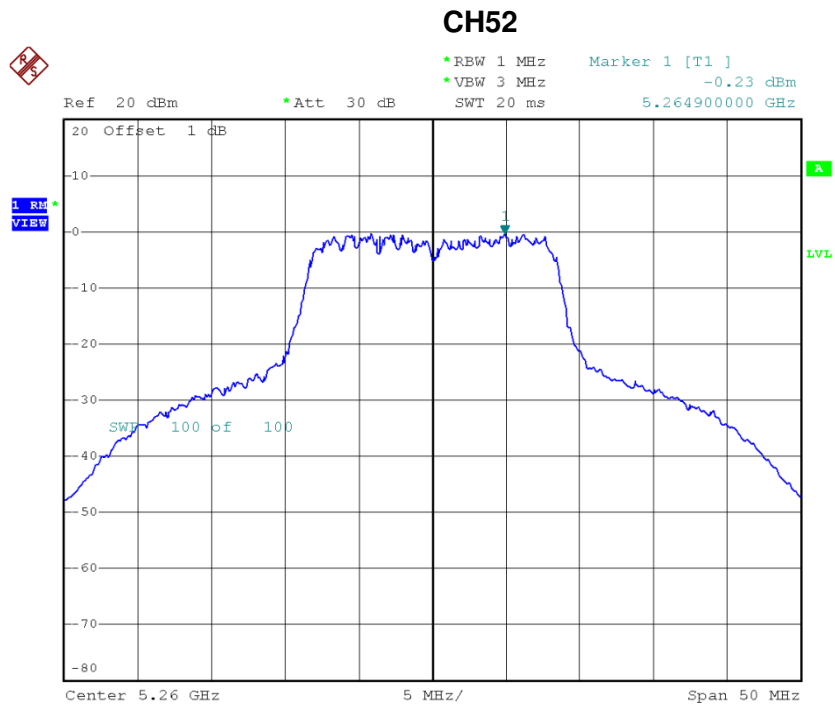


Date: 5.JUL.2016 13:52:36

### CH60

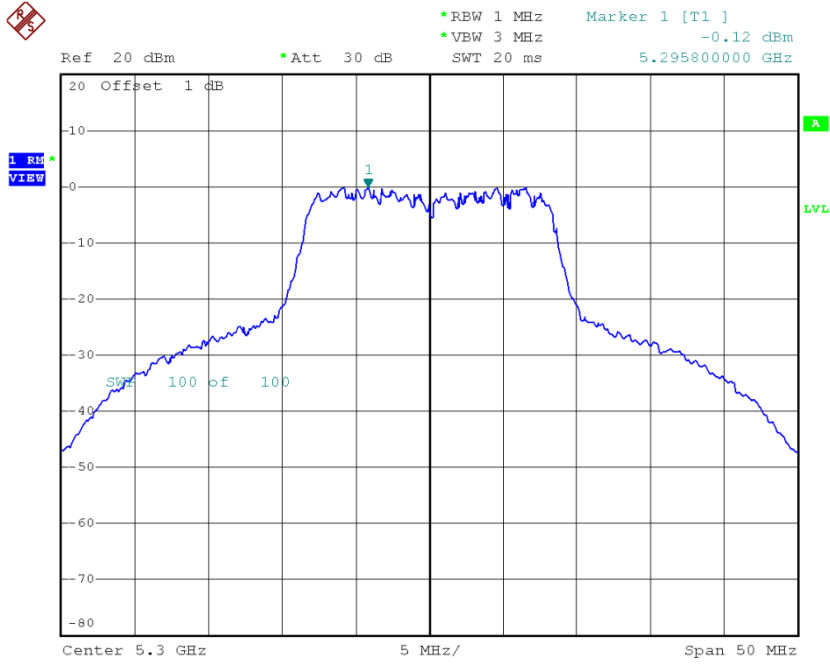

Date: 5.JUL.2016 14:05:27

### CH64

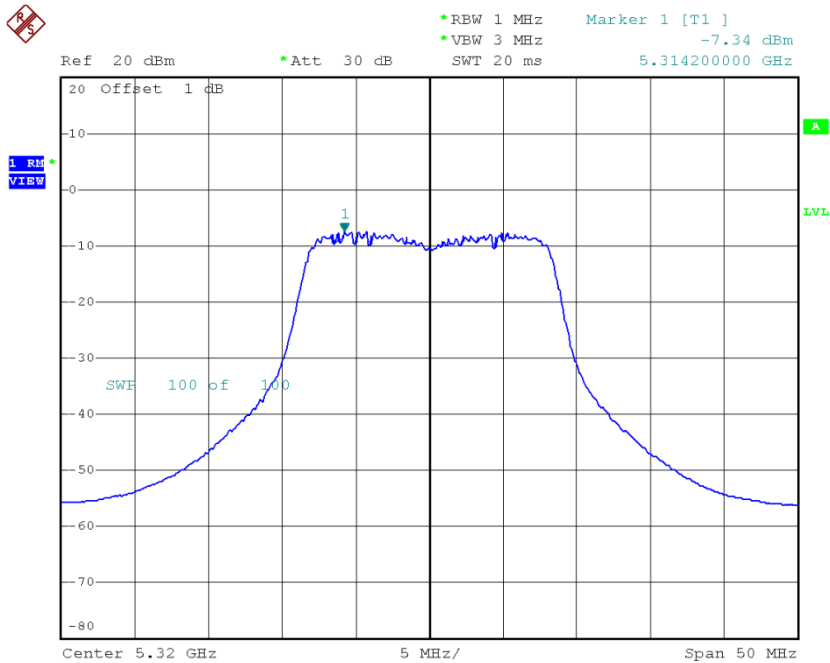


Date: 5.JUL.2016 14:06:33

**Test Mode: UNII-2A/ TX A Mode\_CH52/CH60/CH64\_Total**

Channel	Frequency (MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	3.15	10.24
CH60	5300	3.37	10.24
CH64	5320	-2.61	10.24


**Test Mode: UNII-2A/TX N20 Mode\_CH52/CH60/CH64\_ANT 1**

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	-4.66	0.18	-4.48	10.24
CH60	5300	-4.15	0.18	-3.97	10.24
CH64	5320	-9.80	0.18	-9.62	10.24

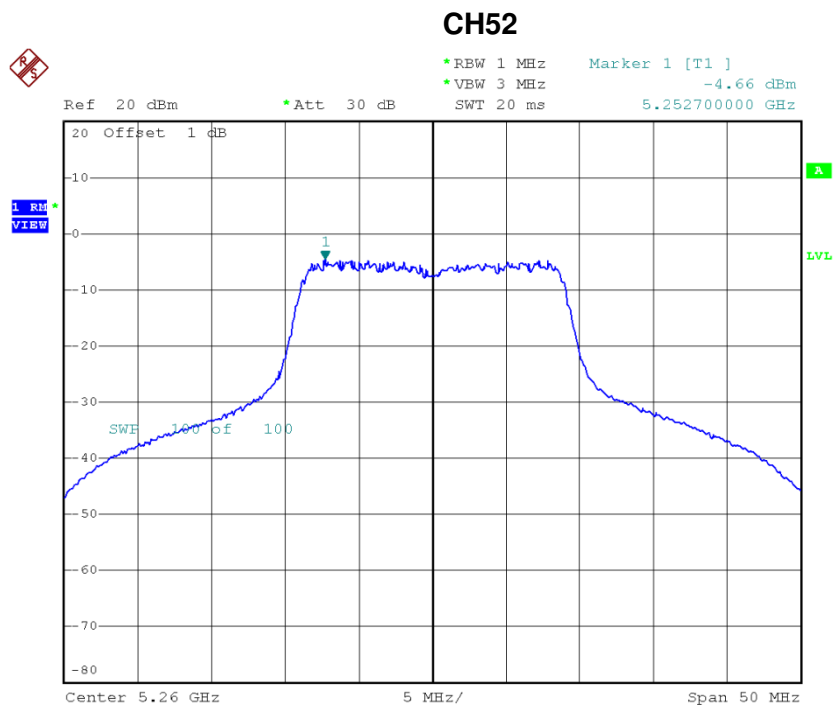


Date: 5.JUL.2016 11:41:56

### CH60

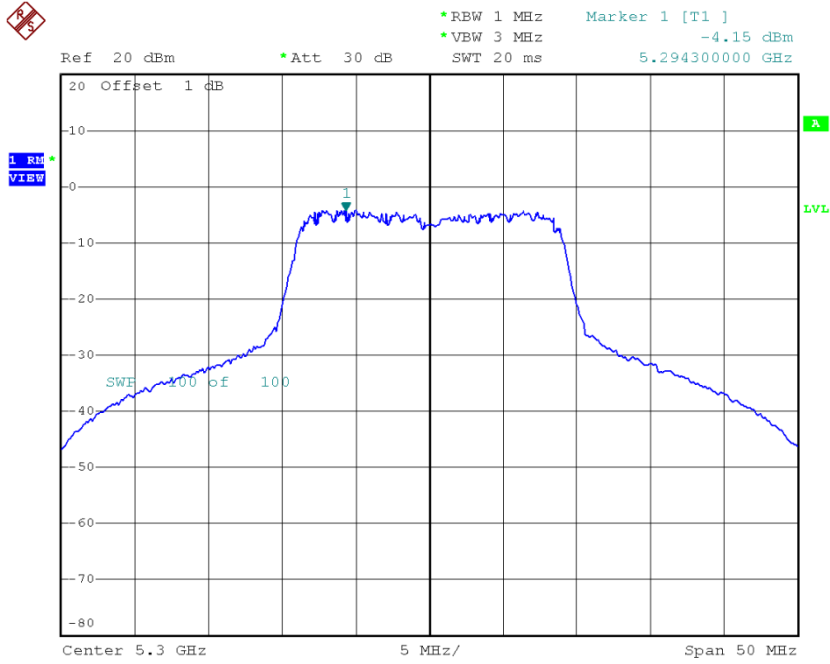

Date: 5.JUL.2016 11:43:23

### CH64

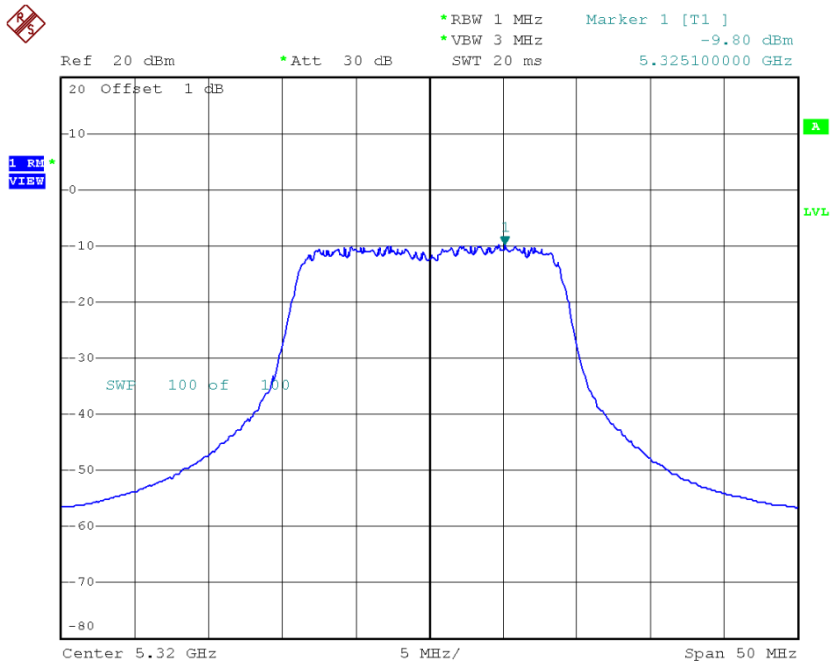


Date: 5.JUL.2016 11:44:39




**Test Mode: UNII-2A/TX N20 Mode\_CH52/CH60/CH64\_ANT 2**

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	-0.65	0.18	-0.47	10.24
CH60	5300	-1.23	0.18	-1.05	10.24
CH64	5320	-6.70	0.18	-6.52	10.24

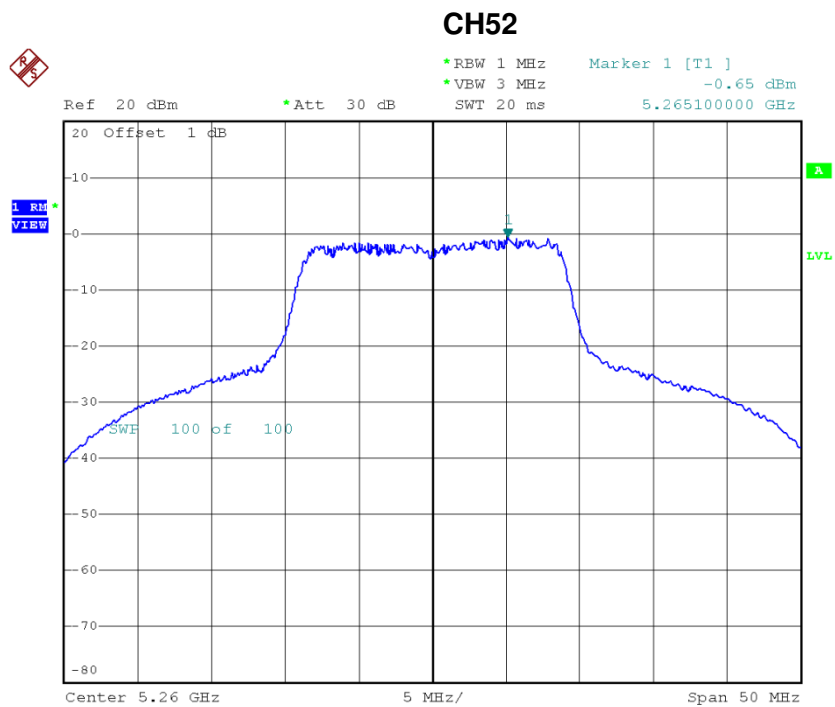


Date: 5.JUL.2016 13:12:53

### CH60

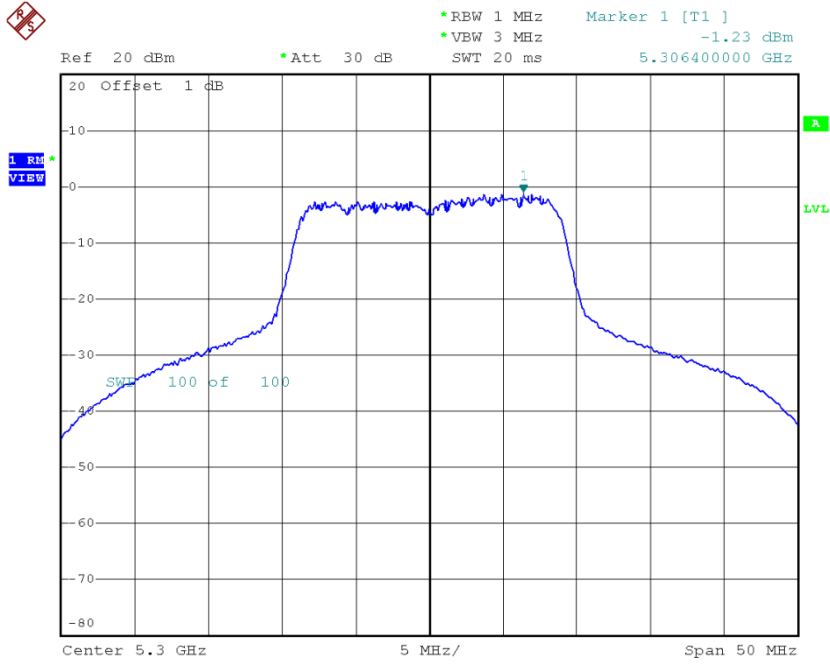

Date: 5.JUL.2016 13:15:32

### CH64

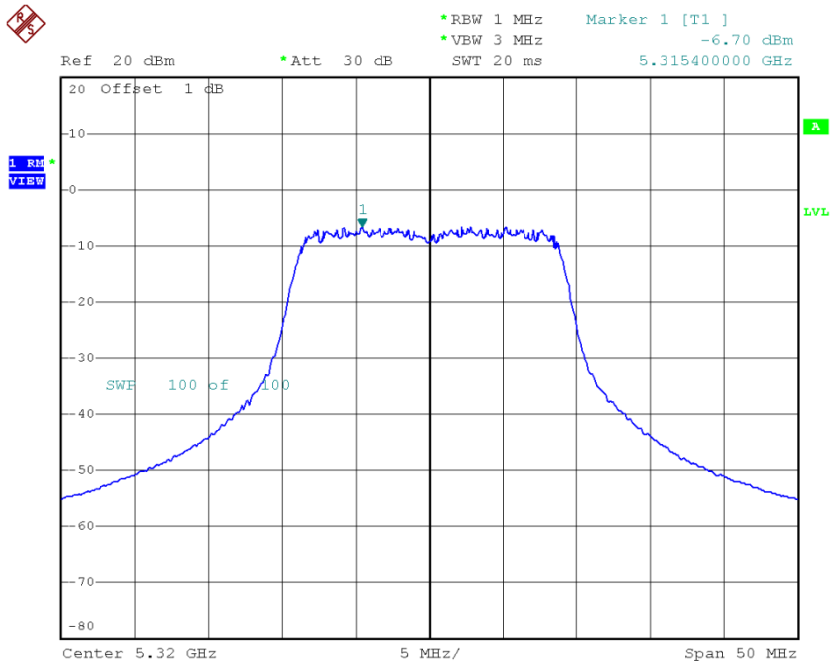

Date: 5.JUL.2016 13:16:32