



REPORT No.: SZ24060309S01

TEST REPORT

APPLICANT : BLU Products, Inc.
PRODUCT NAME : Smart Phone
MODEL NAME : F5
BRAND NAME : BLU
FCC ID : YHLBLU5C
STANDARD(S) : FCC 47 CFR Part 2 (2.1093)
IEEE 1528-2013
RECEIPT DATE : 2024-07-10
TEST DATE : 2024-07-10 to 2024-08-17
ISSUE DATE : 2024-09-04



Edited by:

Xie Yiyun

Xie Yiyun (Rapporteur)

Approved by:

Gan Yue ming

Gan Yueming (Supervisor)

NOTE: This document is issued by Shenzhen Morlab Communications Technology Co., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd.
FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen, Guangdong Province, P. R. China

Tel: 86-755-36698555

Http://www.morlab.cn

Fax: 86-755-36698525

E-mail: service@morlab.cn





DIRECTORY

1. SAR Results Summary	5
2. Technical Information	7
2.1. Applicant and Manufacturer Information	7
2.2. Equipment under Test (EUT) Description	7
2.3. Environment of Test Site/Conditions	9
3. Specific Absorption Rate (SAR)	10
3.1. Introduction	10
3.2. SAR Definition	10
4. RF Exposure Limits	11
4.1. Uncontrolled Environment	11
4.2. Controlled Environment	11
5. Applied Reference Documents	12
6. SAR Measurement System	13
6.1. E-Field Probe	14
6.2. Data Acquisition Electronics (DAE)	15
6.3. Robot	15
6.4. Measurement Server	16
6.5. Light Beam Unit	16
6.6. Phantom	16
6.7. Device Holder	17
6.8. Data Storage and Evaluation	18
6.9. Test Equipment List	20
7. Tissue Simulating Liquids	22
8. SAR System Verification	25
8.1. Purpose of System Performance Check	25
8.2. System Setup	25



8.3. Validation Results	26
9. EUT Testing Position	30
9.1. Handset Reference Points	30
9.2. Positioning for Cheek / Touch	31
9.3. Positioning for Ear / 15° Tilt	31
9.4. SAR Evaluation near the Mouth/Jaw Regions of the Phantom	32
9.5. Body-worn Configurations	32
9.6. Hotspot Mode Exposure Position Conditions	33
10. Measurement Procedures	34
10.1. Spatial Peak SAR Evaluation	34
10.2. Power Reference Measurement	35
10.3. Area Scan Procedures	35
10.4. Zoom Scan Procedures	35
10.5. SAR Averaged Methods	36
10.6. Power Drift Monitoring	36
11. SAR Test Procedure	37
11.1. General Scan Requirements	37
11.2. Test Procedure	38
11.3. Description of Interpolation/Extrapolation Scheme	38
11.4. Wireless Router	38
12. SAR Test Configuration	40
13. Conducted Power List	52
14. Carrier Aggregation	52
14.1. LTE Uplink Carrier Aggregation	52
14.2. LTE Downlink Carrier Aggregation	53
14.3. 5G NR Carrier Aggregation	55
15. 5G NR EN-DC Consideration	56
16. Hotspot Mode Evaluation Procedure	60



17. Block Diagram of the Tests to be Performed	62
17.1. Head	62
17.2. Body	63
18. Proximity Sensor Considerations	64
18.1. Proximity Sensor Triggering Distances	64
18.2. Proximity Sensor Coverage	65
19. Test Results List	66
19.1. Test Guidance	66
19.2. Head SAR Data	72
19.3. Body-worn SAR Data	87
19.4. Hotspot SAR Data	95
19.5. Repeated SAR Assessment	109
19.6. Extremity SAR Assessment	111
20. Simultaneous Transmission Evaluation	112
20.1. Simultaneous Transmission Consideration	112
20.2. Simultaneous Transmission Analysis	113
21. Uncertainty Assessment	113
Annex A General Information	114
Annex B Test Setup Photos	
Annex C Plots of System Performance Check	
Annex D Plots of Maximum SAR Test Results	
Annex E Conducted Power	
Annex F Simultaneous Transmission Data	
Annex G DASY Calibration Certificate	

Changed History		
Version	Date	Reason for Change
1.0	2024-09-04	First edition

1. SAR Results Summary

The maximum results of Specific Absorption Rate (SAR) found during test as bellows:

<Highest Reported SAR Summary>

Frequency Band		Highest SAR Summary			
		Head (Gap 0mm)	Body-worn (Gap 15mm)	Hotspot (Gap 10mm)	Extremity (Gap 0mm)
		1g SAR (W/kg)			10g SAR (W/kg)
GSM	GSM850	0.566	0.553	1.146	N/A
	GSM1900	1.147	0.726	1.122	N/A
WCDMA	WCDMA II	1.107	0.585	0.852	N/A
	WCDMA IV	1.088	0.400	0.939	N/A
	WCDMA V	0.592	0.570	1.148	N/A
LTE	LTE Band 2	0.939	0.654	1.154	N/A
	LTE Band 5	0.437	0.422	1.067	N/A
	LTE Band 7	0.872	0.741	1.126	N/A
	LTE Band 12/17	0.430	0.463	0.595	N/A
	LTE Band 13	0.535	0.491	0.844	N/A
	LTE Band 25	1.026	0.569	1.150	N/A
	LTE Band 26	0.458	0.390	0.994	N/A
	LTE Band 38	0.804	0.319	0.707	N/A
	LTE Band 41	0.722	0.170	0.379	N/A
	LTE Band 66/4	1.174	0.411	0.875	N/A
	LTE Band 71	0.471	0.482	0.665	N/A
5G NR	n2	1.152	1.049	1.083	N/A
	n5	0.451	0.413	0.938	N/A
	n25	1.093	1.104	1.080	N/A
	n41	1.140	0.962	0.840	N/A
	n66	1.127	0.926	1.138	N/A
	n71	0.453	0.263	0.510	N/A
	n77	1.136	1.172	1.106	N/A
WLAN	2.4GHz WLAN	0.241	0.216	0.355	N/A
	5GHz WLAN	0.359	0.360	0.307	0.353
2.4GHz Band	Bluetooth	N/A	0.037	0.081	N/A



Highest Simultaneous Transmission SAR _{1g} (W/Kg):	1.581	Limit (W/kg): 1.6
--	-------	-------------------

Note:

1. This device is in compliance with Specific Absorption Rate (SAR) for general population or uncontrolled exposure limits (1.6 W/kg as averaged over any 1 gram of tissue; specified in FCC 47 CFR Part 1 (1.1310) and ANSI/IEEE C95.1-1992), and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.
2. For FDD-LTE Band 4/17 is full covered by FDD-LTE Band 66/12, therefore only FDD-LTE Band 66/12 was tested.
3. When the test result is a critical value, we will use the measurement uncertainty give the judgment result based on the 95% confidence intervals.



2. Technical Information

Note: Provide by applicant.

2.1. Applicant and Manufacturer Information

Applicant:	BLU Products, Inc.
Applicant Address:	8600 NW 36th Street, Suite #300 Miami, FL 33166, USA
Manufacturer:	BLU Products, Inc.
Manufacturer Address:	8600 NW 36th Street, Suite #300 Miami, FL 33166, USA

2.2. Equipment under Test (EUT) Description

Product Name:	Smart Phone
EUT IMEI:	352233930364527/02 352233930363826/02
Hardware Version:	BL_E115S2_01
Software Version:	BLU_F0090_V14.0.02.00_GENERIC 12-07-2024
Frequency Bands:	GSM 850: 824 MHz ~ 849 MHz GSM 1900: 1850 MHz ~ 1910 MHz WCDMA Band II: 1850 MHz ~ 1910 MHz WCDMA Band IV: 1710 MHz ~ 1755 MHz WCDMA Band V: 824 MHz ~ 849 MHz LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 17: 704 MHz ~ 716 MHz LTE Band 25: 1850 MHz ~ 1915 MHz LTE Band 26: 814 MHz ~ 849 MHz LTE Band 38: 2570 MHz ~ 2620 MHz LTE Band 41: 2496 MHz ~ 2690 MHz LTE Band 66: 1710 MHz ~ 1780 MHz LTE Band 71: 663 MHz ~ 698 MHz 5G NR n2: 1850 MHz ~ 1910 MHz 5G NR n5: 824 MHz ~ 849 MHz 5G NR n25: 1850 MHz ~ 1915 MHz 5G NR n41: 2496 MHz ~ 2690 MHz



	5G NR n66: 1710 MHz ~ 1780 MHz 5G NR n71: 663 MHz ~ 698 MHz 5G NR n77: 3450 MHz ~ 3550 MHz; 3700 MHz ~ 3980 MHz WLAN 2.4GHz: 2412 MHz ~ 2462 MHz WLAN 5.2GHz: 5180 MHz ~ 5240 MHz WLAN 5.3GHz: 5260 MHz ~ 5320 MHz WLAN 5.5GHz: 5500 MHz ~ 5720 MHz WLAN 5.8GHz: 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz	
Modulation Mode:	GSM/GPRS: GMSK EDGE: 8PSK WCDMA: QPSK, 16QAM LTE: QPSK, 16QAM, 64QAM 5G NR: DFT-s-OFDM/CP-OFDM, PI/2 BPSK QPSK, 16QAM, 64QAM, 256QAM 802.11b: DSSS 802.11a/g/n-HT20/HT40/ac-VHT20/40/80: OFDM BR+EDR: GFSK (1Mbps), $\pi/4$ -DQPSK (2Mbps), 8-DPSK (3Mbps) Bluetooth LE: GFSK (1Mbps, 2Mbps)	
Multi-slot Class:	GPRS: Multi-slot Class 12 EDGE: Multi-slot Class 12	
Operation Class:	Class B	
Carrier Aggregation:	Uplink & Downlink	
VoLTE Mode:	Support	
VoWi-Fi Mode:	Support	
Hotspot Mode:	Support (5G WLAN only for B1 & B4)	
Antenna Type:	WWAN: PIFA Antenna WLAN: PIFA Antenna Bluetooth: PIFA Antenna	
SIM Cards Description:	SIM 1	GSM+WCDMA+LTE+5G NR
	SIM 2	GSM+WCDMA+LTE+5G NR

Note: For more detailed description, please refer to specification or user manual supplied by the applicant and/or manufacturer.

2.3. Environment of Test Site/Conditions

Normal Temperature (NT):	20-25 °C
Relative Humidity:	30-75 %

Test Frequency:	GSM 850MHz/1900MHz WCDMA Band II/IV/V FDD-LTE Band 2/4/5/7/12/13/17/25/26/66/71 TDD-LTE Band 38/41 5G NR n2/5/25/41/66/71/77 WLAN 2.4GHz WLAN 5GHz Bluetooth
Operation Mode:	Call established
Power Level:	GSM 850 MHz Maximum output power (level 5) GSM 1900MHz Maximum output power (level 0) WCDMA Band II/IV/V (All Up Bits) FDD-LTE Band 2/4/5/7/12/13/17/25/26/66/71 (Maximum output power) TDD-LTE Band 38/41 (Maximum output power) 5G NR n2/5/25/41/66/71/77 (Maximum output power) WLAN 2.4GHz/WLAN 5GHz/Bluetooth Refers to annex E in this report

During SAR test, EUT is in Traffic Mode (Channel Allocated) at Normal Voltage Condition. A communication link is set up with a System Simulator (SS) by air link, and a call is established.

The EUT shall use its internal transmitter. The antenna(s), battery and accessories shall be those specified by the Factory. The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power output. If a wireless link is used, the antenna connected to the output of the base station simulator shall be placed at least 50 cm away from the handset.

The signal transmitted by the simulator to the antenna feeding point shall be lower than the output power level of the handset by at least 35 dB.

3. Specific Absorption Rate (SAR)

3.1. Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational or controlled and general population or uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational or controlled exposure limits are Middle than the limits for general population or uncontrolled.

3.2. SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by(dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density. (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg).

SAR measurement can be either related to the temperature elevation in tissue by,

$$SAR = C \left(\frac{\delta T}{\delta t} \right)$$

Where C is the specific head capacity, δT is the temperature rise and δt the exposure duration, or related to the electrical field in the tissue by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where σ is the conductivity of the tissue, ρ is the mass density of the tissue and |E| is the rmselectrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.



4. RF Exposure Limits

4.1. Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

4.2. Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for General Population/Uncontrolled Exposure (W/kg)

Type Exposure	Uncontrolled Environment Limit
Spatial Peak SAR (1g cube tissue for head and trunk)	1.6 W/kg
Spatial Peak SAR (10g cube tissue for limbs)	4.0 W/kg
Spatial Peak SAR (1g cube tissue for whole body)	0.08 W/kg

Note:

1. Occupational/Uncontrolled Environments are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure (i.e. as a result of employment or occupation).
2. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

5. Applied Reference Documents

Leading reference documents for testing:

Identity	Document Title	Method Determination /Remark
FCC 47 CFR Part 2(2.1093)	Radio Frequency Radiation Exposure Evaluation: Portable Devices	No deviation
IEEE 1528-2013	IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques	No deviation
KDB 447498 D01v06	General RF Exposure Guidance	No deviation
KDB 248227 D01v02r02	SAR Measurement Procedures for 802.11 Transmitters	No deviation
KDB 865664 D01v01r04	SAR Measurement 100 MHz to 6 GHz	No deviation
KDB 865664 D02v01r02	RF Exposure Reporting	No deviation
KDB 648474 D04v01r03	Handset SAR	No deviation
KDB 941225 D01v03r01	3G SAR MEAUREMENT PROCEDURES	No deviation
KDB 941225 D05v02r05	SAR Evaluation Consideration for LTE Devices	No deviation
KDB 941225 D06v02r01	SAR Evaluation Procedures For Portable Devices With Wireless Router Capabilities	No deviation
Note 1: Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.		

6. SAR Measurement System

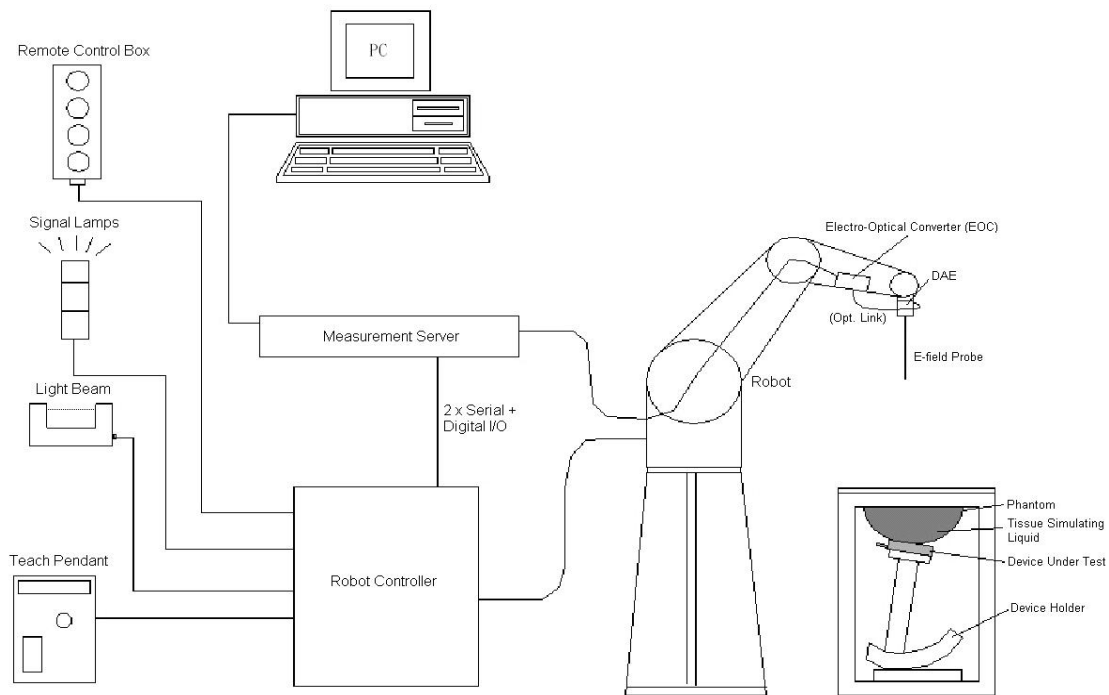


Fig 6.1 SPEAG DASY System Configurations

The DASY system for performance compliance tests is illustrated above graphically. This system consists of the following items:

- A standard high precision 6-axis robot with controller, a teach pendant and software.
- A data acquisition electronic (DAE) attached to the robot arm extension.
- A dosimetric probe equipped with an optical surface detector system.
- The electro-optical converter (ECO) performs the conversion between optical and electrical signals
- A measurement server performs the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the accuracy of the probe positioning.
- A computer operating Windows XP.
- DASY software.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom.
- A device holder.
- Tissue simulating liquid.
- Dipole for evaluating the proper functioning of the system.
- Some of the components are described in details in the following sub-sections.

6.1. E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

➤ E-Field Probe Specification

<ES3DV3 Probe>

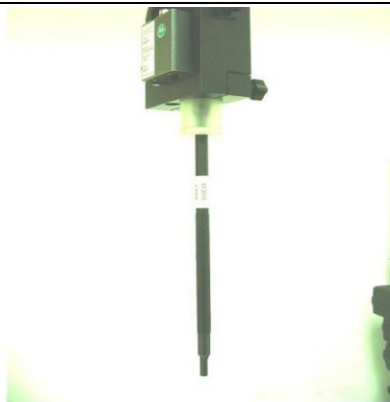
Construction	Symmetrical design with triangular core Built-in optical fiber for surface detection system. Built-in shielding against static charges. PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz to 3 GHz; Linearity: ± 0.2 dB	
Directivity	± 0.2 dB in HSL (rotation around probe axis) ± 0.4 dB in HSL (rotation normal to probe axis)	
Dynamic Range	5 μ W/g to 100 mW/g; Linearity: ± 0.2 dB	
Dimensions	Overall length: 330 mm (Tip: 16 mm) Tip diameter: 6.8 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.7 mm	

Fig 6.2 Photo of ES3DV3

<EX3DV4 Probe>

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz to 6 GHz; Linearity: ± 0.2 dB	
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)	
Dynamic Range	10 μ W/g to 100 mW/g; Linearity: ± 0.2 dB	
Dimensions	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

Fig 6.3 Photo of EX3DV4

➤ E-Field Probe Calibration

Each probe needs to be calibrated according to a dosimetric assessment procedure with accuracy better than $\pm 10\%$. The spherical isotropy shall be evaluated and within ± 0.25 dB. The sensitivity parameters (NormX, NormY, and NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested. The calibration data can be referred to appendix C of this report.

6.2. Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock. The input impedance of the DAE is 200M Ω ; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Fig 6.4 Photo of DAE

6.3. Robot

The SPEAG DASY system uses the high precision robots (DASY4: RX90BL; DASY5: TX90XL) type from Stäubli SA (France). For the 6-axis controller system, the robot controller version (DASY4: CS7MB; DASY5: CS8c) from Stäubli is used. The Stäubli robot series have many features that are important for our application:

High precision (repeatability ± 0.035 mm)

High reliability (industrial design)

Jerk-free straight movements

Low ELF interference (the closed metallic construction shields against motor control fields)



Fig 6.5 Photo of DASY5

6.4. Measurement Server

The measurement server is based on a PC/104 CPU board with CPU (DASY4: 166 MHz, Intel Pentium; DASY5: 400 MHz, Intel Celeron), chip disk (DASY4: 32 MB; DASY5: 128 MB), RAM (DASY4: 64 MB, DASY5: 128 MB). The necessary circuits for communication with the DAE electronic box, as well as the 16 bits AD converter system for optical detection and digital I/O interface are contained on the DASY I/O board, which is directly connected to the PC/104 bus of the CPU board. The measurement server performs all the real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operations.



Fig 6.6 Photo of Server for DASY5

6.5. Light Beam Unit

The light beam switch allows automatic "tooling" of the probe. During the process, the actual position of the probe tip with respect to the robot arm is measured, as well as the probe length and the horizontal probe offset. The software then corrects all movements, such that the robot coordinates are valid for the probe tip.

The repeatability of this process is better than 0.1 mm. If a position has been taught with an aligned probe, the same position will be reached with another aligned probe within 0.1 mm, even if the other probe has different dimensions. During probe rotations, the probe tip will keep its actual position.



Fig. 6.7 Photo of Light Beam

6.6. Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm (sagging: <1%) Center ear point: 6 ± 0.2 mm
Filling Volume	Approx. 25 liters
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet
Measurement Areas	Left Head, Right Head, Flat Phantom



Fig. 6.8 Photo of SAM Phantom

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

6.7. Device Holder

<Device Holder for SAM Twin Phantom>

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of ± 0.5 mm would produce a SAR uncertainty of ± 20 %. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.

The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation center for both scales is the ear reference point (EPR). Thus the device needs no repositioning when changing the angles.

The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

<Laptop Extension Kit>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Fig 6.9 Device Holder

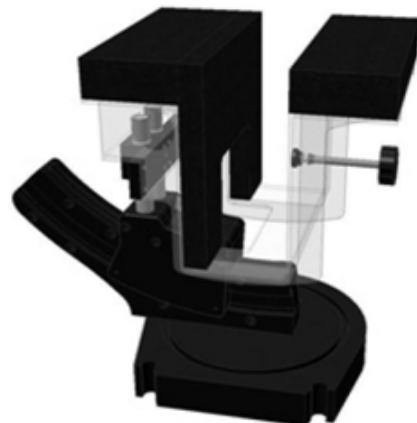


Fig 6.10 Laptop Extension Kit

6.8. Data Storage and Evaluation

➤ Data Storage

The DASY software stores the assessed data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all the necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files. The post-processing software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of erroneous parameter settings. For example, if a measurement has been performed with an incorrect crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be reevaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type (e.g., [V/m], [A/m], [mW/g]). Some of these units are not available in certain situations or give meaningless results, e.g., a SAR-output in a non-lose media, will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

➤ Data Evaluation

The DASY post-processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software.

Probe parameters:	- Sensitivity	$\text{Norm}_i, a_{i0}, a_{i1}, a_{i2}$
	- Conversion factor	ConvF_i
	- Diode compression point	dcpi
Device parameters:	- Frequency	f
	- Crest factor	cf
Media parameters:	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multi-meter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the



exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power.

The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \times \frac{cf}{dcp_i}$$

With V_i = compensated signal of channel i , ($i = x, y, z$)
 U_i = input signal of channel i , ($i = x, y, z$)
 cf = crest factor of exciting field (DASY parameter)
 dcp_i = diode compression point (DASY parameter)

From the compensated input signals, the primary field data for each channel can be evaluated:

$$\text{E-field Probes: } E_i = \sqrt{\frac{V_i}{\text{Norm}_i \times \text{ConvF}}}$$

$$\text{H-field Probes: } H_i = \sqrt{V_i} \times \frac{a_{i0} + a_{i1} + a_{i2} f^2}{f}$$

With V_i = compensated signal of channel i , ($i = x, y, z$)
 Norm_i = sensor sensitivity of channel i , ($i = x, y, z$), $\mu\text{V}/(\text{V/m})^2$ for E-field
 Probes ConvF = sensitivity enhancement in solution
 a_{ij} = sensor sensitivity factors for H-field probes
 f = carrier frequency [GHz]
 E_i = electric field strength of channel i in V/m
 H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{\text{tot}} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$\text{SAR} = E_{\text{tot}}^2 \times \frac{\sigma}{\rho \times 1000}$$

with SAR = local specific absorption rate in mW/g

E_{tot} = total field strength in V/m

σ = conductivity in [mho/m] or [Siemens/m]

ρ = equivalent tissue density in g/cm^3

Note that the density is set to 1, to account for actual head tissue density rather than the density of the tissue simulating liquid.



6.9. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial No./ SW Version	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit	D750V3	1223	2022.08.22	2025.08.21
SPEAG	900MHz System Validation Kit	D900V2	1d064	2021.12.17	2024.12.16
SPEAG	1800MHz System Validation Kit	D1800V2	2d158	2021.12.17	2024.12.16
SPEAG	2000MHz System Validation Kit	D2000V2	1050	2021.12.18	2024.12.17
SPEAG	2450MHz System Validation Kit	D2450V2	805	2021.12.17	2024.12.16
SPEAG	2600MHz System Validation Kit	D2600V2	1198	2022.08.17	2025.08.16
SPEAG	3500MHz System Validation Kit	D3500V2	1104	2023.06.03	2026.06.02
SPEAG	3700MHz System Validation Kit	D3700V2	1076	2023.06.03	2026.06.02
SPEAG	3900MHz System Validation Kit	D3900V2	1046	2023.06.02	2026.06.01
SPEAG	5000MHz System Validation Kit	D5GHzV2	1176	2021.12.19	2024.12.18
SPEAG	DOSIMETRIC ASSESSMENT SYSTEM Software	DASY5	52.10.4.1527	NCR	NCR
SPEAG	Dosimetric E-Field Probe	EX3DV4	7608	2024.03.21	2025.03.20
SPEAG	Data Acquisition Electronics	DAE4	1643	2024.03.27	2025.03.26
SPEAG	SAM Twin Phantom 2	QD000P40CC	TP-1464	NCR	NCR
SPEAG	Phone Positioner	N/A	N/A	NCR	NCR
R&S	Network Emulator	CMW500	165755	2024.01.25	2025.01.24
Anritsu	Network Emulator	MT8820C	6201274521	2024.01.25	2025.01.24
Anritsu	Network Emulator	MT8821C	6261830572	2024.01.25	2025.01.24
Anritsu	Network Emulator	MT8000A	6262148249	2024.06.30	2025.06.29
Agilent	Network Analyzer	E5071B	MY42404762	2024.01.25	2025.01.24
SPEAG	Dielectric Assessment KIT	DAK-3.5	1279	2024.03.18	2025.03.17
mini-circuits	Amplifier	ZHL-42W+	608501717	NCR	NCR
mini-circuits	Amplifier	ZVE-8G+	754401735	NCR	NCR
Agilent	Signal Generator	N5182B	MY53050509	2023.09.19	2024.09.18
R&S	Power Sensor	NRP8S	103215	2024.01.25	2025.01.24
Agilent	Power Meter	E4416A	MY45102093	2023.09.19	2024.09.18
R&S	Power Sensor	NRP8S	103240	2024.01.25	2025.01.24
Anritsu	Power Meter	E4418B	GB43318055	2024.05.30	2025.05.29
Agilent	Dual Directional Coupler	778D	50422	NA	NA
MCL	Attenuation	351-218-010	N/A	NA	NA



R&S	Spectrum Analyzer	N9030A	MY54170556	2023.10.07	2024.10.06
KTJ	Thermo meter	TA298	N/A	2023.11.22	2024.11.21
SPEAG	Tissue Simulating Liquids	HBBL600-10000V6		24H	

Note:

1. The calibration certificate of DASY can be referred to appendix G of this report.
2. The Insertion Loss calibration of Dual Directional Coupler and Attenuator were characterized via the network analyzer and compensated during system check.
3. The dielectric probe kit was calibrated via the network analyzer, with the specified procedure (calibrated in pure water) and calibration kit (standard) short circuit, before the dielectric measurement. The specific procedure and calibration kit are provided by Speag.
4. In system check we need to monitor the level on the power meter, and adjust the power amplifier level to have precise power level to the dipole; the measured SAR will be normalized to 1W input power according to the ratio of 1W to the input power to the dipole. For system check, the calibration of the power amplifier is deemed not critically required for correct measurement; the power meter is critical and we do have calibration for it.
5. Attenuator insertion loss is calibrated by the network Analyzer, which the calibration is valid, before system check.
6. N.C.R means No Calibration Requirement.

7. Tissue Simulating Liquids

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15cm. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15cm, which is shown in Fig. 7.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 7.2. The nominal dielectric values of the tissue simulating liquids in the phantom and the tolerance of 5% are listed in below table.

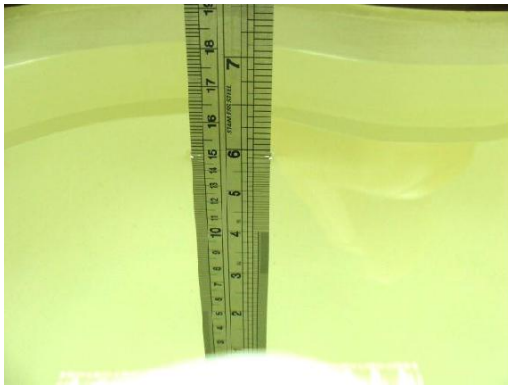


Fig 7.1 Photo of Liquid Height for Head SAR



Fig 7.2 Photo of Liquid Height for Body SAR

The following table gives the recipes for tissue simulating liquids

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
Head								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
1800,1900,2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0
Body								
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
1800,1900,2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7
2600	68.1	0	0	0.1	0	31.8	2.16	52.5

Simulating Liquid for 5GHz, Manufactured by SPEAG.

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%



Note: Please refer to the validation results for dielectric parameters of each frequency band.
The dielectric properties of the tissue simulating liquids were verified prior to the SAR evaluation using a SPEAG Dielectric Assessment KIT and an Agilent Network Analyzer.

Table 1: Dielectric Performance of Tissue Simulating Liquid

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity (σ)	Conductivity Target (σ)	Delta (σ) (%)	Limit (%)	Date
750	HSL	22.5	0.932	0.89	4.72	±5	2024.07.12
750	HSL	22.5	0.924	0.89	3.82	±5	2024.07.17
750	HSL	22.8	0.933	0.89	4.83	±5	2024.08.01
900	HSL	22.4	0.982	0.97	1.24	±5	2024.07.10
900	HSL	22.1	0.981	0.97	1.13	±5	2024.07.14
900	HSL	22.6	0.991	0.97	2.16	±5	2024.08.11
1800	HSL	22.6	1.433	1.40	2.36	±5	2024.07.11
1800	HSL	22.4	1.454	1.40	3.86	±5	2024.07.13
1800	HSL	22.2	1.427	1.40	1.93	±5	2024.07.18
1800	HSL	22.5	1.463	1.40	4.50	±5	2024.07.24
1800	HSL	22.8	1.428	1.40	2.00	±5	2024.07.25
1800	HSL	22.5	1.459	1.40	4.21	±5	2024.08.17
2000	HSL	22.3	1.411	1.40	0.79	±5	2024.07.20
2000	HSL	22.2	1.405	1.40	0.36	±5	2024.07.28
2450	HSL	22.3	1.833	1.80	1.83	±5	2024.07.30
2600	HSL	22.2	1.959	1.96	-0.05	±5	2024.07.21
2600	HSL	22.7	1.943	1.96	-0.87	±5	2024.07.22
2600	HSL	22.4	1.955	1.96	-0.26	±5	2024.07.26
2600	HSL	22.2	1.933	1.96	-1.38	±5	2024.07.29
2600	HSL	22.4	1.918	1.96	-2.14	±5	2024.08.02
3500	HSL	22.7	2.929	2.91	0.65	±5	2024.07.19
3500	HSL	22.1	2.931	2.91	0.72	±5	2024.08.03
3700	HSL	22.5	3.103	3.05	1.74	±5	2024.08.07
3900	HSL	22.2	3.117	3.15	-1.05	±5	2024.07.23
3900	HSL	22.4	3.109	3.15	-1.30	±5	2024.08.16
5250	HSL	22.6	4.631	4.71	-1.68	±5	2024.07.27
5600	HSL	22.8	4.964	5.07	-2.09	±5	2024.08.12
5750	HSL	22.3	5.238	5.22	0.34	±5	2024.08.13
Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Permittivity (ϵ_r)	Permittivity Target (ϵ_r)	Delta (ϵ_r) (%)	Limit (%)	Date



REPORT No.: SZ24060309S01

750	HSL	22.5	43.159	41.90	3.00	±5	2024.07.12
750	HSL	22.5	43.084	41.90	2.83	±5	2024.07.17
750	HSL	22.8	43.296	41.90	3.33	±5	2024.08.01
900	HSL	22.4	42.931	41.50	3.45	±5	2024.07.10
900	HSL	22.1	41.785	41.50	0.69	±5	2024.07.14
900	HSL	22.6	42.972	41.50	3.55	±5	2024.08.11
1800	HSL	22.6	40.548	40.00	1.37	±5	2024.07.11
1800	HSL	22.4	40.701	40.00	1.75	±5	2024.07.13
1800	HSL	22.2	40.732	40.00	1.83	±5	2024.07.18
1800	HSL	22.5	41.203	40.00	3.01	±5	2024.07.24
1800	HSL	22.8	40.396	40.00	0.99	±5	2024.07.25
1800	HSL	22.5	40.832	40.00	2.08	±5	2024.08.17
2000	HSL	22.3	40.184	40.00	0.46	±5	2024.07.20
2000	HSL	22.2	40.233	40.00	0.58	±5	2024.07.28
2450	HSL	22.3	39.648	39.20	1.14	±5	2024.07.30
2600	HSL	22.2	38.562	39.00	-1.12	±5	2024.07.21
2600	HSL	22.7	38.474	39.00	-1.35	±5	2024.07.22
2600	HSL	22.4	38.967	39.00	-0.08	±5	2024.07.26
2600	HSL	22.2	38.241	39.00	-1.95	±5	2024.07.29
2600	HSL	22.4	38.556	39.00	-1.14	±5	2024.08.02
3500	HSL	22.7	37.349	37.90	-1.45	±5	2024.07.19
3500	HSL	22.1	37.574	37.90	-0.86	±5	2024.08.03
3700	HSL	22.5	36.955	37.70	-1.98	±5	2024.08.07
3900	HSL	22.2	36.923	37.50	-1.54	±5	2024.07.23
3900	HSL	22.4	36.741	37.50	-2.02	±5	2024.08.16
5250	HSL	22.6	35.394	35.95	-1.55	±5	2024.07.27
5600	HSL	22.8	35.221	35.50	-0.79	±5	2024.08.12
5750	HSL	22.3	36.341	35.35	2.80	±5	2024.08.13

8. SAR System Verification

Each DASY system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the DASY software, enable the user to conduct the system performance check and system validation. System validation kit includes a dipole, tripod holder to fix it underneath the flat phantom and a corresponding distance holder.

8.1. Purpose of System Performance Check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

8.2. System Setup

The output power on dipole port must be calibrated to 24 dBm (250 mW) before dipole is connected. In the simplified setup for system evaluation, the DUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave which comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The system check verifies that the system operates within its specifications. It is performed daily or before every SAR measurement. The system check uses normal SAR measurements in the flat section of the phantom with a matched dipole at a specified distance. The system verification setup is shown as below.



Fig 8.1 Photo of Dipole Setup

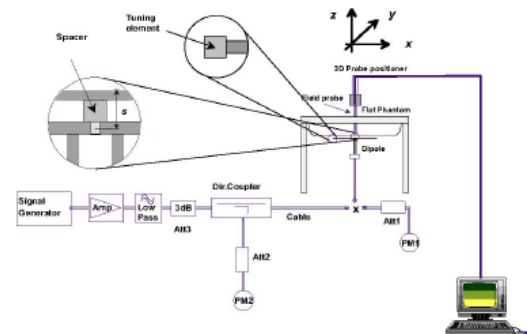


Fig 8.2 System Setup for System Evaluation

8.3. Validation Results

After system check testing, the SAR result will be normalized to 1W forward input power and compared with the reference SAR value derived from validation dipole certificate report. The deviation of system check should be within 10%.

<Validation Setup>

Frequency (MHz)	Tissue Type	Input Power(mW)	Dipole S/N	Probe S/N	DAE S/N
750	HSL	250	D750V3-1223	7608	1643
900	HSL	250	D900V2-1d064	7608	1643
1800	HSL	250	D1800V2-2d158	7608	1643
2000	HSL	250	D2000V2-1050	7608	1643
2450	HSL	250	D2450V2-805	7608	1643
2600	HSL	250	D2600V2-1198	7608	1643
3500	HSL	100	D3500V2-1104	7608	1643
3700	HSL	100	D3700V2-1076	7608	1643
3900	HSL	100	D3900V2-1176	7608	1643
5250	HSL	100	D5GHzV2-1176-5250	7608	1643
5600	HSL	100	D5GHzV2-1176-5600	7608	1643
5750	HSL	100	D5GHzV2-1176-5750	7608	1643

<System Validation>

Frequency (MHz)	Tissue Type	Conductivity (σ)	Permittivity (ϵ_r)	CW Signal Validation		
				Sensitivity	Probe Linearity	Probe Isotropy
750	HSL	0.851	42.43	PASS	PASS	PASS
835	HSL	0.898	41.88	PASS	PASS	PASS
1750	HSL	1.386	39.91	PASS	PASS	PASS
1800	HSL	1.449	41.26	PASS	PASS	PASS
1900	HSL	1.435	39.65	PASS	PASS	PASS
2000	HSL	1.451	39.42	PASS	PASS	PASS
2300	HSL	1.764	38.99	PASS	PASS	PASS
2450	HSL	1.863	38.85	PASS	PASS	PASS
2600	HSL	1.973	38.58	PASS	PASS	PASS
3400	HSL	2.88	38.10	PASS	PASS	PASS
3500	HSL	2.91	37.90	PASS	PASS	PASS
3700	HSL	3.05	37.70	PASS	PASS	PASS
3900	HSL	3.15	37.50	PASS	PASS	PASS



REPORT No.: SZ24060309S01

4100	HSL	3.25	37.20	PASS	PASS	PASS
4200	HSL	3.34	37.00	PASS	PASS	PASS
4400	HSL	3.58	36.70	PASS	PASS	PASS
4600	HSL	3.70	36.60	PASS	PASS	PASS
4800	HSL	3.82	36.40	PASS	PASS	PASS
4900	HSL	3.96	36.20	PASS	PASS	PASS
5250	HSL	4.528	35.32	PASS	PASS	PASS
5600	HSL	4.905	34.89	PASS	PASS	PASS
5750	HSL	5.077	34.28	PASS	PASS	PASS

Frequency (MHz)	Tissue Type	Conductivity (σ)	Permittivity (ϵ_r)	Modulation Signal Validation		
				Mod. Type	Duty Factor	PAR
750	HSL	0.851	42.43	N/A	N/A	N/A
835	HSL	0.898	41.88	GMSK	PASS	N/A
1750	HSL	1.386	39.91	N/A	N/A	N/A
1800	HSL	1.449	41.26	N/A	N/A	N/A
1900	HSL	1.435	39.65	GMSK	PASS	N/A
2000	HSL	1.451	39.42	GMSK	PASS	N/A
2300	HSL	1.764	38.99	OFDM	PASS	PASS
2450	HSL	1.863	38.85	OFDM	PASS	PASS
2600	HSL	1.973	38.58	TDD	PASS	N/A
3400	HSL	2.88	38.10	OFDM	PASS	PASS
3500	HSL	2.91	37.90	OFDM	PASS	PASS
3700	HSL	3.05	37.70	OFDM	PASS	PASS
3900	HSL	3.15	37.50	OFDM	PASS	PASS
4100	HSL	3.25	37.20	OFDM	PASS	PASS
4200	HSL	3.34	37.00	OFDM	PASS	PASS
4400	HSL	3.58	36.70	OFDM	PASS	PASS
4600	HSL	3.70	36.60	OFDM	PASS	PASS
4800	HSL	3.82	36.40	OFDM	PASS	PASS
4900	HSL	3.96	36.20	OFDM	PASS	PASS
5250	HSL	4.528	35.32	OFDM	N/A	PASS
5600	HSL	4.905	34.89	OFDM	N/A	PASS
5750	HSL	5.077	34.28	OFDM	N/A	PASS



REPORT No.: SZ24060309S01

<Validation Results>

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2024.07.12	750	HSL	250	2.15	8.54	8.6	0.70
2024.07.17	750	HSL	250	2.27	8.54	9.08	6.32
2024.08.01	750	HSL	250	2.13	8.54	8.52	-0.23
2024.07.10	900	HSL	250	2.78	11.20	11.12	-0.71
2024.07.14	900	HSL	250	2.81	11.20	11.24	0.36
2024.08.11	900	HSL	250	2.83	11.20	11.32	1.07
2024.07.11	1800	HSL	250	10.03	39.20	40.12	2.35
2024.07.13	1800	HSL	250	10.18	39.20	40.72	3.88
2024.07.18	1800	HSL	250	10.12	39.20	40.48	3.27
2024.07.24	1800	HSL	250	10.27	39.20	41.08	4.80
2024.07.25	1800	HSL	250	10.11	39.20	40.44	3.16
2024.08.17	1800	HSL	250	10.19	39.20	40.76	3.98
2024.07.20	2000	HSL	250	11.28	41.60	45.12	8.46
2024.07.28	2000	HSL	250	11.03	41.60	44.12	6.06
2024.07.30	2450	HSL	250	13.76	52.30	55.04	5.24
2024.07.21	2600	HSL	250	15.29	57.00	61.16	7.30
2024.07.22	2600	HSL	250	15.18	57.00	60.72	6.53
2024.07.26	2600	HSL	250	15.34	57.00	61.36	7.65
2024.07.29	2600	HSL	250	15.14	57.00	60.56	6.25
2024.08.02	2600	HSL	250	15.17	57.00	60.68	6.46
2024.07.19	3500	HSL	100	7.28	67.20	72.8	8.33
2024.08.03	3500	HSL	100	7.11	67.20	71.1	5.80
2024.08.07	3700	HSL	100	7.32	67.50	73.2	8.44
2024.07.23	3900	HSL	100	7.28	69.90	72.8	4.15
2024.08.16	3900	HSL	100	7.19	69.90	71.9	2.86
2024.07.27	5250	HSL	100	7.59	76.70	75.9	-1.04
2024.08.12	5600	HSL	100	8.45	80.80	84.5	4.58
2024.08.13	5750	HSL	100	8.23	78.70	82.3	4.57

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Deviation (%)
2024.07.12	750	HSL	250	1.40	5.57	5.6	0.54
2024.07.17	750	HSL	250	1.51	5.57	6.04	8.44
2024.08.01	750	HSL	250	1.46	5.57	5.84	4.85



REPORT No.: SZ24060309S01

2024.07.10	900	HSL	250	1.79	7.19	7.16	-0.42
2024.07.14	900	HSL	250	1.75	7.19	7	-2.64
2024.08.11	900	HSL	250	1.81	7.19	7.24	0.70
2024.07.11	1800	HSL	250	5.11	20.10	20.44	1.69
2024.07.13	1800	HSL	250	5.09	20.10	20.36	1.29
2024.07.18	1800	HSL	250	5.14	20.10	20.56	2.29
2024.07.24	1800	HSL	250	5.09	20.10	20.36	1.29
2024.07.25	1800	HSL	250	5.03	20.10	20.12	0.10
2024.08.17	1800	HSL	250	5.12	20.10	20.48	1.89
2024.07.20	2000	HSL	250	5.33	20.70	21.32	3.00
2024.07.28	2000	HSL	250	5.19	20.70	20.76	0.29
2024.07.30	2450	HSL	250	6.21	23.90	24.84	3.93
2024.07.21	2600	HSL	250	6.28	25.70	25.12	-2.26
2024.07.22	2600	HSL	250	6.53	25.70	26.12	1.63
2024.07.26	2600	HSL	250	6.35	25.70	25.4	-1.17
2024.07.29	2600	HSL	250	6.03	25.70	24.12	-6.15
2024.08.02	2600	HSL	250	5.95	25.70	23.8	-7.39
2024.07.19	3500	HSL	100	2.62	25.10	26.2	4.38
2024.08.03	3500	HSL	100	2.53	25.10	25.3	0.80
2024.08.07	3700	HSL	100	2.31	24.20	23.1	-4.55
2024.07.23	3900	HSL	100	2.21	24.10	22.1	-8.30
2024.08.16	3900	HSL	100	2.39	24.10	23.9	-0.83
2024.07.27	5250	HSL	100	2.31	22.10	23.1	4.52
2024.08.12	5600	HSL	100	2.27	23.30	22.7	-2.58
2024.08.13	5750	HSL	100	2.19	22.50	21.9	-2.67

Note: System checks the specific test data please see Annex C.

9. EUT Testing Position

This EUT was tested in ten different positions. They are right cheek/right tilted/left cheek/left tilted for head, Front/Back/Left/Right/Top/Bottom of the EUT with phantom 10 mm gap, as illustrated below, please refer to Appendix B for the test setup photos.

9.1. Handset Reference Points

The vertical centre line passes through two points on the front side of the handset – the midpoint of the width w_t of the handset at the level of the acoustic output, and the midpoint of the width w_b of the bottom of the handset.

The horizontal line is perpendicular to the vertical centre line and passes the center of the acoustic output. The horizontal line is also tangential to the handset at point A.

The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line.

Also note that the vertical centre line is not necessarily parallel to the front face of the handset, especially for clamshell handsets, handsets with flip covers, and other irregularly shaped handsets.



Fig. 9.1 Illustration for Cheek Position

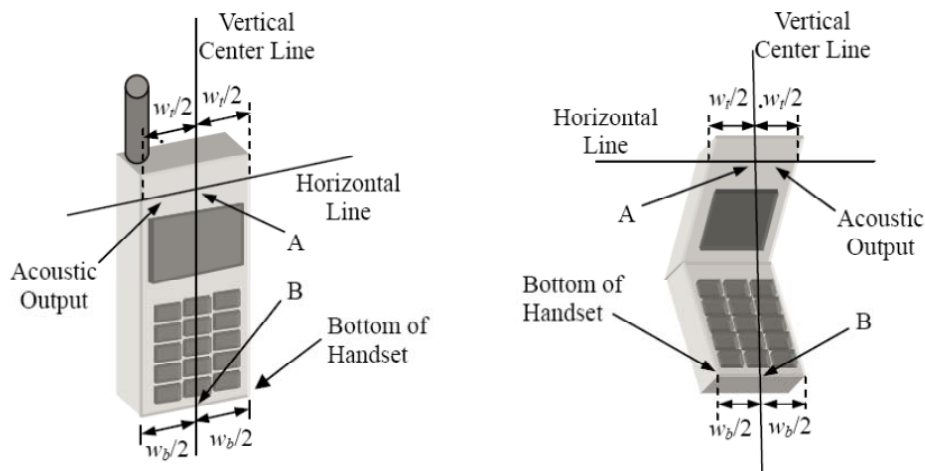


Fig. 9.2 Illustration for Handset Vertical and Horizontal Reference Lines

9.2. Positioning for Cheek / Touch

To position the device with the vertical center line of the body of the device and the horizontal line crossing the center piece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the three ear and mouth reference point (M: Mouth, RE: Right Ear and LE: Left Ear) and align the center of the ear piece with the line RE-LE.

To move the device towards the phantom with the ear piece aligned with the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with the ear, move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost (see below figure)

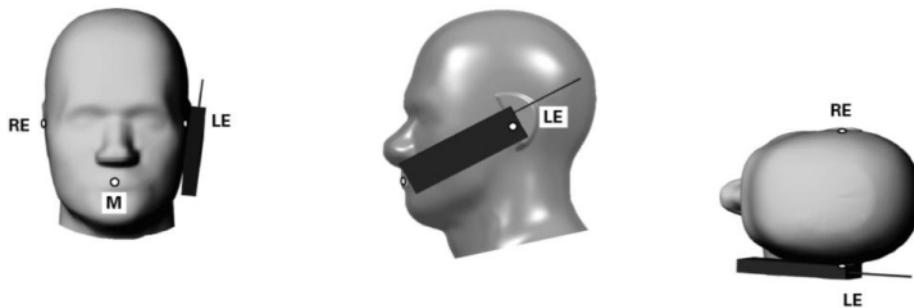


Fig 9.3 Illustration for Cheek Position

9.3. Positioning for Ear / 15° Tilt

To position the device in the “cheek” position described above.

While maintaining the device the reference plane described above and pivoting against the ear, moves it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost (see figure below).

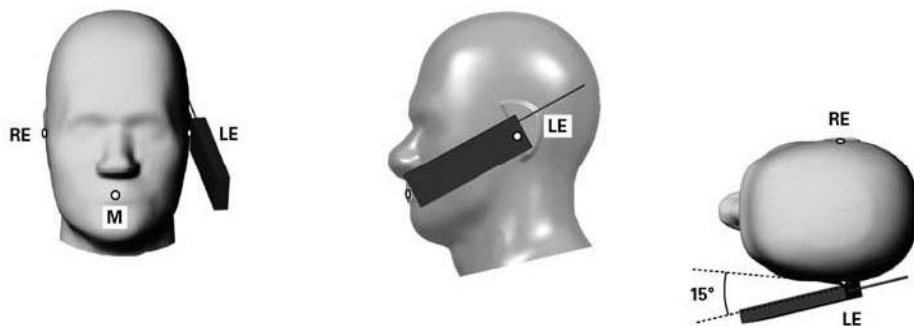


Fig 9.4 Illustration for Tilted Position

9.4. SAR Evaluation near the Mouth/Jaw Regions of the Phantom

Antennas located near the bottom of a phone may require SAR measurements around the mouth and jaw regions of the SAM head phantom. This typically applies to clam-shell style phones that are generally longer in the unfolded normal use positions or to certain older style long rectangular phones.

Under these circumstances, the following procedures apply, adopted from the FCC guidance on SAR handsets document FCC KDB Publication 648474 D04v01r03. The SAR required in these regions of SAM should be measured using a flat phantom. The phone should be positioned with a separation distance of 4 mm between the ear reference point (ERP) and the outer surface of the flat phantom shell. While maintaining this distance at the ERP location, the low (bottom) edge of the phone should be lowered from the phantom to establish the same separation distance between the peak SAR locations identified by the truncated partial SAR distribution measured with the SAM phantom. The distance from the peak SAR location to the phone is determined by the straight line passing perpendicularly through the phantom surface. When it is not feasible to maintain 4 mm separation at the ERP while also establishing the required separation at the peak SAR location, the top edge of the phone will be allowed to touch the phantom with a separation < 4 mm at the ERP. The phone should not be tilted to the left or right while placed in this inclined position to the flat phantom.

9.5. Body-worn Configurations

The body-worn configurations shall be tested with the supplied accessories (belt-clips, holsters, etc.) attached to the device in normal use configuration.

For body-worn and other configurations a flat phantom shall be used which is comprised of material with electrical properties similar to the corresponding tissues.

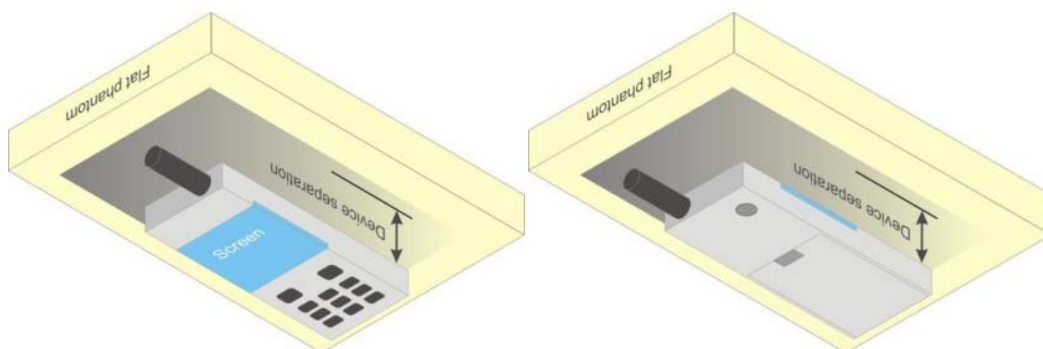


Fig 9.5 Illustration for Body Worn Position

9.6. Hotspot Mode Exposure Position Conditions

For handsets that support hotspot mode operations, with wireless router capabilities and various web browsing functions, the relevant hand and body exposure conditions are tested according to the hotspot SAR procedures in KDB 941225. A test separation distance of 10 mm is required between the phantom and all surfaces and edges with a transmitting antenna located within 25 mm from that surface or edge. When the form factor of a handset is smaller than 9 cm x 5 cm, a test separation distance of 5 mm (instead of 10 mm) is required for testing hotspot mode. When the separation distance required for body-worn accessory testing is larger than or equal to that tested for hotspot mode, in the same wireless mode and for the same surface of the phone, the hotspot mode SAR data may be used to support body-worn accessory SAR compliance for that particular configuration (surface).

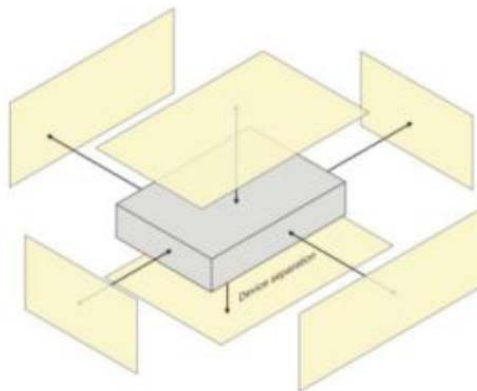


Fig 9.6 Illustration for Hotspot Position

10. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band.
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power.

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band.
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg.

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement.
- (b) Area scan.
- (c) Zoom scan.
- (d) Power drift measurement.

10.1. Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.



The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan.
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters).
- (c) Generation of a high-resolution mesh within the measured volume.
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid.
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface.
- (f) Calculation of the averaged SAR within masses of 1g and 10g.

10.2. Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

10.3. Area Scan Procedures

Area scans are defined prior to the measurement process being executed with a user defined variable spacing between each measurement point (integral) allowing low uncertainty measurements to be conducted. Scans defined for FCC applications utilize a 10mm^2 step integral, with 1mm interpolation used to locate the peak SAR area used for zoom scan assessments.

When an Area Scan has measured all reachable points, it computes the field maxima founding the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE1528-2003.

10.4. Zoom Scan Procedures

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. A density of 1000 kg/m^3 is used to represent the head and body tissue density and not the phantom liquid density, in order to be consistent with the definition of the liquid dielectric properties, i.e. the side length of the 1g cube is 10mm, with the side



length of the 10 g cube 21,5mm. The zoom scan integer steps can be user defined so as to reduce uncertainty, but normal practice for typical test applications utilize a physical step of 5 x 5 x 7 (8mm x 8mm x 5mm) providing a volume of 32mm in the X & Y axis, and 30mm in the Z axis.

10.5. SAR Averaged Methods

In DASY, the interpolation and extrapolation are both based on the modified Quadratic Sheppard's method. The interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5 mm.

10.6. Power Drift Monitoring

All SAR testing is under the DUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of DUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drift more than 5%, the SAR will be retested.

11. SAR Test Procedure

11.1. General Scan Requirements

Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1-g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std. 1528-2013.

			≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			5 mm $\pm$ 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2)$ mm $\pm$ 0.5 mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location			$30^{\circ} \pm 1^{\circ}$	$20^{\circ} \pm 1^{\circ}$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}			≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx_{Zoom} , Δy_{Zoom}			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$ mm	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see IEEE Std 1528-2013 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB Publication 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

11.2. Test Procedure

The Following steps are used for each test position

1. Establish a call with the maximum output power with a base station simulator. The connection between the mobile and the base station simulator is established via air interface.
2. Measurement of the local E-field value at a fixed location. This value serves as a reference value for calculating a possible power drift.
3. Measurement of the SAR distribution with a grid of 8 to 16mm * 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme.
4. Around this point, a cube of 30 * 30 * 30 mm or 32 * 32 * 32 mm is assessed by measuring 5 or 8 * 5 or 8*4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

11.3. Description of Interpolation/Extrapolation Scheme

The local SAR inside the phantom is measured using small dipole sensing elements inside a probe body. The probe tip must not be in contact with the phantom surface in order to minimize measurements errors, but the highest local SAR will occur at the surface of the phantom.

An extrapolation is using to determinate this highest local SAR values. The extrapolation is based on a fourth-order least-square polynomial fit of measured data. The local SAR value is then extrapolated from the liquid surface with a 1mm step.

The measurements have to be performed over a limited time (due to the duration of the battery) so the step of measurement is high. It could vary between 5 and 8 mm. To obtain an accurate assessment of the maximum SAR averaged over 10 grams and 1 gram requires a very fine resolution in the three dimensional scanned data array.

11.4. Wireless Router

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10 from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges,



determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

12. SAR Test Configuration

<GSM Mode>

A summary of these settings are illustrated below:

For GSM850 frequency band, the power control is set to 5 for GSM/GPRS mode (GSMK-CS1) and set to 8 for EDGE mode (MCS5); For GSM1900 frequency band, the power control is set to 0 for GSM/GPRS mode (GSMK-CS1) and set to 2 for EDGE mode (MCS5).

1. Per KDB 447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. Per KDB 941225 D01v03r01, SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS (4Tx slots) for GSM850/GSM1900 is considered as the primary mode.
3. Other configurations of GSM / GPRS / EDGE are considered as secondary modes.

Timeslot consignations:

Remark:

1. The frame-averaged power is linearly reported the maximum burst averaged power over 8 time slots. The calculated method is shown as below:
The duty cycle "x" of different time slots as below:
1 TX slot is 1/8, 2 TX slots is 2/8, 3 TX slots is 3/8 and 4 TX slots is 4/8
Based on the calculation formula:
Frame-averaged power = Burst averaged power + 10 log (x)
So,
Frame-averaged power (1 TX slot) = Burst averaged power (1 TX slot) – 9.03
Frame-averaged power (2 TX slots) = Burst averaged power (2 TX slots) – 6.02
Frame-averaged power (3 TX slots) = Burst averaged power (3 TX slots) – 4.26
Frame-averaged power (4 TX slots) = Burst averaged power (4 TX slots) – 3.01
2. CS1 coding scheme was used in GPRS conducted power measurements and SAR testing, MCS5 coding scheme was used in EGPRS conducted power measurements and SAR testing (if necessary).

No. of Slots:	Slot 1	Slot 2	Slot 3	Slot 4
Slot Consignation:	1Up 4Down	2Up 3Down	3Up 2Down	4Up 1Down
Duty Cycle:	1:8.3	1:4.15	1:2.77	1:2.08
Correct Factor:	-9.03dB	-6.02dB	-4.26dB	-3.01dB

<WCDMA Mode>

Summary of UMTS conducted power measurement:

1. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode, SAR measurement is not required for the secondary mode.
2. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
3. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
4. For HSPA+ devices supporting 16 QAM in the uplink, power measurements procedure is according to the configurations in Table C.11.1.4 of 3GPP TS 34.121-1.
5. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA / HSPA+ is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA / HSPA+ to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA / HSPA+, and according to the following RF output power, the output power results of the secondary modes (HSDPA / HSUPA / DC-HSDPA / HSPA+) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA / HSPA+.
6. A fixed level power reduction is applied for WCDMA Band II when handset open Hotspot mode, the power reduction triggered.

HSDPA Setup Configuration

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	CM (dB) ⁽²⁾
1	2/15	15/15	64	2/15	4/15	0.0
2	12/15 ⁽³⁾	15/15 ⁽³⁾	64	12/15 ⁽³⁾	24/15	1.0
3	15/15	8/15	64	15/8	30/15	1.5
4	15/15	4/15	64	15/4	30/15	1.5
Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$ Note 2: CM = 1 for $\beta_c/\beta_d = 12/15, \beta_{hs}/\beta_c = 24/15$. Note 3: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.						

HSUPA Setup Configuration

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	β_{ec}	β_{ed}	β_{ed} (SF)	β_{ed} (codes)	CM ⁽²⁾ (dB)	MPR (dB)	AG ⁽⁴⁾ Index	E-TFCI
1	11/15 ⁽³⁾	15/15 ⁽³⁾	64	11/15 ⁽³⁾	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 ⁽⁴⁾	15/15 ⁽⁴⁾	64	15/15 ⁽⁴⁾	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g.

Note 6: β_{ed} cannot be set directly; it is set by Absolute Grant Value.

HSPA+ 3GPP release 7 (uplink category 7) 16QAM, Setup Configuration:

Table C.11.1.4: β values for transmitter characteristics tests with HS-DPCCH and E-DCH with 16QAM

Sub-test	β_c (Note 3)	β_d	β_{hs} (Note 1)	β_{ec}	β_{ed} (2xSF2) (Note 4)	β_{ed} (2xSF4) (Note 4)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 4)	E-TFCI (Note 5)	E-TFCI (boost)
1	1	0	30/15	30/15	β_{ed1} : 30/15 β_{ed2} : 30/15	β_{ed3} : 24/15 β_{ed4} : 24/15	3.5	2.5	14	105	105

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0).

Note 3: DPDCH is not configured, therefore the β_c is set to 1 and $\beta_d = 0$ by default.

Note 4: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signaled to use the extrapolation algorithm.

DC-HSDPA Setup Configuration

The following tests were completed according to procedures in section 7.3.13 of 3GPP TS34.108 v9.5.0. A summary of these settings are illustrated below:

Downlink Physical Channels are set as per 3GPP TS34.121-1 v9.0.0 E.5.

Table E.5.0: Levels for HSDPA connection setup


Parameter During Connection setup	Unit	Value
P-CPICH_Ec/Ior	dB	-10
P-CCPCH and SCH_Ec/Ior	dB	-12
PICH_Ec/Ior	dB	-15
HS-PDSCH	dB	off
HS-SCCH_1	dB	off
DPCH_Ec/Ior	dB	-5
OCNS_Ec/Ior	dB	-3.1

Call is set up as per 3GPP TS34.108 v9.5.0 sub clause 7.3.13

The configurations of the fixed reference channels for HSDPA RF tests are described in 3GPP TS 34.121, annex C for FDD and 3GPP TS 34.122.

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table. Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

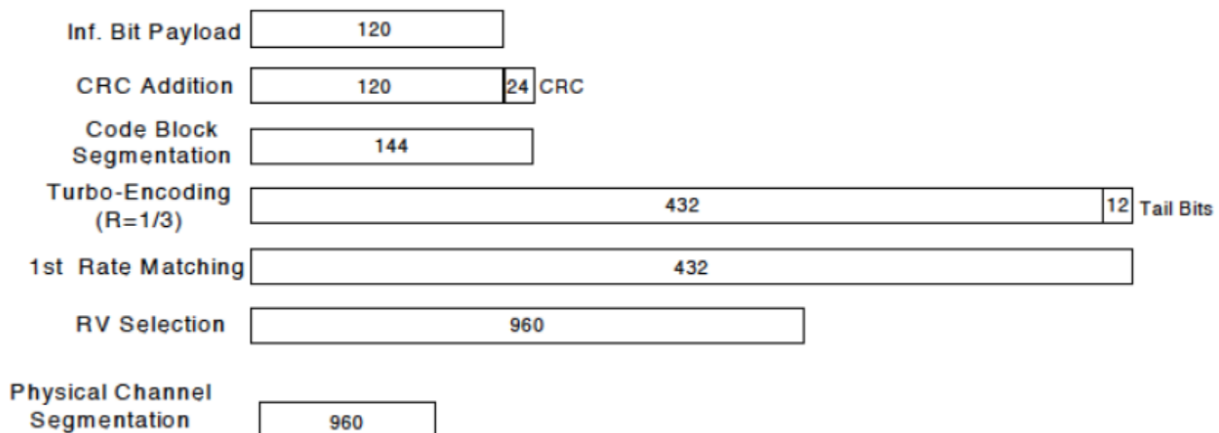
Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)



<CDMA Mode>

1xEV-DO Rev. B

Call box setup procedure

1xEV-DO Release B

1> CMW 500 Signal Generator > 1xEV-DO Taskbar Enable

2> CMW 500 1xEV-DO Signaling Configuration Window >

3> 1xEV-DO Signaling On Window:

Under Access Network Control:

Band Class: BC0: US Cellular

RF Channel: 31

1xEV-DO Power: -70 dBm

4> 1xEV-DO Signaling Configuration Window

Under RF Frequency Band / Channel: Enter Ch. Frequency

- Under Carrier Configuration: RF Frequency
For Two Carriers: Low Channel (1013)

	<u>RF Channel</u>	<u>RF Channel Offset</u>
Carrier [0]	31	0
Carrier [1]	1013	982

- Under Carrier Configuration: RF Pilot
- | | <u>Carrier Sector</u> | <u>Active on AN</u> | <u>Assigned to AT</u> |
|-----------|-----------------------|---------------------|-----------------------|
| Pilot [0] | C0/S0 | ✓ | ✓ |
| | CA/S1 | ✓ | ✓ |

For Three Carriers: Low Channel (1013)

	<u>RF Channel</u>	<u>RF Channel Offset</u>
Carrier [0]	72	0
Carrier [1]	31	-41
Carrier [2]	1013	941

- Under Carrier Configuration: RF Pilot
- | | <u>Carrier Sector</u> | <u>Active on AN</u> | <u>Assigned to AT</u> |
|-----------|-----------------------|---------------------|-----------------------|
| Pilot [0] | C0/S0 | ✓ | ✓ |
| Pilot [1] | C1/S1 | ✓ | ✓ |
| Pilot [2] | C2/S2 | ✓ | ✓ |



<LTE Mode>

LTE Target MPR level

The device implements maximum power reduction per 3GPP 36.101 requirements where the MPR target is as below table. The MPR settings are implemented configured into firmware and cannot be disabled by the end user or LTE carrier network.

Modulation	Channel bandwidth / Transmission bandwidth configuration [RB]						MPR	3GPP
	1.4	3.0	5	10	15	20	Target	MPR
	MHz	MHz	MHz	MHz	MHz	MHz	(dB)	(dB)
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	1	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	1	≤ 1
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	2	≤ 2

Note: The measurement result showed some difference from the target MPR level, due to expected 0.5dB measurement tolerance

LTE Bands

LTE Bands	Channel bandwidth / Transmission bandwidth configuration [RB]					
	1.4	3.0	5	10	15	20
	MHz	MHz	MHz	MHz	MHz	MHz
2	√	√	√	√	√	√
4	√	√	√	√	√	√
5	√	√	√	√	N/A	N/A
7	N/A	N/A	√	√	√	√
12	√	√	√	√	N/A	N/A
13	N/A	N/A	√	√	N/A	N/A
17	N/A	N/A	√	√	N/A	N/A
25	√	√	√	√	√	√
26	√	√	√	√	√	N/A
38	N/A	N/A	√	√	√	√
41	N/A	N/A	√	√	√	√
66	√	√	√	√	√	√
71	N/A	N/A	√	√	√	√

Note:

1. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
2. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.



3. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
4. Per KDB 941225 D05v02r05, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
5. Per KDB 941225 D05v02r05, 16QAM/64QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB941225 D05v02r05, 16QAM/64QAM SAR testing is not required.
6. Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ Db higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported band width is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
7. For LTE B4 / B5 / B7 / B17 the maximum bandwidth does not support three non-overlapping channels, per KDB941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
8. LTE band 2 / 12 SAR test was covered by Band 25 / 17; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. The maximum output power, including tolerance, for the smaller band is $\leq$ the larger band to qualify for the SAR test exclusion.
 - b. The channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band.
9. According to 2017 TCB workshop, for 64 QAM and 16 QAM should be verified by checking the signal constellation with a call box to avoid incorrect maximum power levels due to MPR and other requirements associated with signal modulation, and the following figure is taken from the "Fundamental Measurement >> Modulation Analysis >> constellation" mode of the device connect to the CMW500 base station, therefore, the device 64QAM and 16QAM signal modulation are correct. Identify if Maximum Power Reduction (MPR) is optional or mandatory, i.e. built-in by design: only mandatory MPR may be considered during SAR testing, when the maximum output power is permanently limited by the MPR implemented within the UE; and only for the applicable RB (resource block) configurations specified in LTE standards: b) A-MPR (additional MPR) must be disabled.
10. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.

- b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1 / (duty cycle)"
 - c. For WWAN: Reported SAR (W/kg) = Measured SAR (W/kg) * Tune-up Scaling Factor
 - d. For WLAN/Bluetooth: Reported SAR (W/kg) = Measured SAR (W/kg) * Duty Cycle scaling factor * Tune-up scaling factor
 - e. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The Reported TDD LTE SAR = measured SAR (W/kg) * Tune-up Scaling Factor * scaling factor for extended cyclic prefix.
11. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is: ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
12. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
13. Per KDB 648474 D04v01r03, when the reported SAR for a body-worn accessory measured without a headset connected to the handset is ≤ 1.2 W/kg, SAR testing with a headset connected to the handset is not required.

<WLAN 2.4GHz>

- a) SAR is measured for 2.4 GHz 802.11b DSSS using either the fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:
 - a. When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
 - b. When the reported SAR is > 0.8 W/kg, SAR is required for that position using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.
- b) 2.4 GHz 802.11 g/n OFDM are additionally evaluated for SAR if the highest reported SAR for 802.11b, adjusted by the ratio of the OFDM to DSSS specified maximum output power, is > 1.2 W/kg. When SAR is required for OFDM modes in 2.4 GHz band, the Initial Test configuration Procedures should be followed.
- c) For held-to-ear and hotspot operations, the initial test position procedures were applied. The test position with the highest extrapolated peak SAR will be used as the initial test position. When

reported SAR for the initial test position is ≤ 0.4 W/kg, no additional testing for the remaining test positions was required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is ≤ 0.8 W/kg or all test positions are measured.

- d) Justification for test configurations for WLAN per KDB Publication 248227 D02DR02-41929 for 2.4 GHz WI-FI single transmission chain operations, the highest measured maximum output power channel for DSSS was selected for SAR measurement. SAR for OFDM modes (2.4 GHz 802.11g/n) was not required due to the maximum allowed powers and the highest reported DSSS SAR.
- e) A fixed level power reduction is applied for WiFi when handset operates "held to the body" condition or "held to the ear" condition, the power reduction triggered by audio receiver detection and call establish status.
- f) Per KDB 248227 D01v02r02, In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. SAR is not required for the following 2.4 GHz OFDM conditions:
 - a. When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.
 - b. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

<WLAN 5GHz>

A) U-NII-1 and U-NII-2A Bands

For devices that operate in only one of the U-NII-1 and U-NII-2A bands, the normally required SAR procedures for OFDM configurations are applied. For devices that operate in both U-NII bands using the same transmitter and antenna(s), SAR test reduction is determined according to the following:

1. When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition); otherwise, both bands are tested independently for SAR.
2. When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for the band with lower maximum output power in that test configuration; otherwise, both bands are tested independently for SAR.
3. The two U-NII bands may be aggregated to support a 160 MHz channel on channel number 50.
4. Without additional testing, the maximum output power for this is limited to the lower of the maximum output power certified for the two bands. When SAR measurement is required for at least one of the bands and the highest reported SAR adjusted by the ratio of specified maximum output power of aggregated to standalone band is > 1.2 W/kg, SAR is required for the 160 MHz channel. This procedure does not apply to an aggregated band with maximum output higher than

the standalone band(s); the aggregated band must be tested independently for SAR. SAR is not required when the 160 MHz channel is operating at a reduced maximum power and also qualifies for SAR test exclusion.

B) U-NII-2C and U-NII-3 Bands

The frequency range covered by these bands is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. when Terminal Doppler Weather Radar (TDWR) restriction applies, all channels that operate at 5.60 – 5.65 GHz must be included to apply the SAR test reduction and measurement procedures. When the same transmitter and antenna(s) are used for U-NII-2C band and U-NII-3 band or 5.8 GHz band of §15.247, the bands may be aggregated to enable additional channels with 20, 40 or 80 MHz bandwidth to span across the band gap, as illustrated in Appendix B. The maximum output power for the additional band gap channels is limited to the lower of those certified for the bands. Unless band gap channels are permanently disabled, they must be considered for SAR testing. The frequency range covered by these bands is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. To maintain SAR measurement accuracy and to facilitate test reduction, the channels in U-NII-2C band above 5.65 GHz may be grouped with the 5.8 GHz channels in U-NII-3 or §15.247 band to enable two SAR probe calibration frequency points to cover the bands, including the band gap channels. When band gap channels are supported and the bands are not aggregated for SAR testing, band gap channels must be considered independently in each band according to the normally required OFDM SAR measurement and probe calibration frequency points requirements.

C) OFDM Transmission Mode SAR Test Configuration and Channel Selection Requirements

The initial test configuration for 5 GHz OFDM transmission modes is determined by the 802.11 configuration with the highest maximum output power specified for production units, including tune-up tolerance, in each standalone and aggregated frequency band. SAR for the initial test configuration is measured using the highest maximum output power channel determined by the default power measurement procedures. When multiple configurations in a frequency band have the same specified maximum output power, the initial test configuration is determined according to the following steps applied sequentially.

1. The largest channel bandwidth configuration is selected among the multiple configurations with the same specified maximum output power.
2. If multiple configurations have the same specified maximum output power and largest channel bandwidth, the lowest order modulation among the largest channel bandwidth configurations is selected.
3. If multiple configurations have the same specified maximum output power, largest channel bandwidth and lowest order modulation, the lowest data rate configuration among these configurations is selected.

4. When multiple transmission modes (802.11a/g/n/ac) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, the lowest order 802.11 mode is selected; i.e., 802.11a is chosen over 802.11n then 802.11ac or 802.11g is chosen over 802.11n. After an initial test configuration is determined, if multiple test channels have the same measured maximum output power, the channel chosen for SAR measurement is determined according to the following. These channel selection procedures apply to both the initial test configuration and subsequent test configuration(s), with respect to the default power measurement procedures or additional power measurements required for further SAR test reduction. The same procedures also apply to subsequent highest output power channel(s) selection.
5. The channel closest to mid-band frequency is selected for SAR measurement.
6. For channels with equal separation from mid-band frequency; for example, high and low channels or two mid-band channels, the higher frequency (number) channel is selected for SAR measurement.

D) SAR Test Requirements for OFDM configurations

When SAR measurement is required for 802.11 a/n/ac OFDM configurations, each standalone and frequency aggregated band is considered separately for SAR test reduction. When the same transmitter and antenna(s) are used for U-NII-1 and U-NII-2A bands, additional SAR test reduction applies. When band gap channels between U-NII-2C band and 5.8 GHz U-NII-3 or §15.247 band are supported, the highest maximum output power transmission mode configuration and maximum output power channel across the bands must be used to determine SAR test reduction, according to the initial test configuration and subsequent test configuration requirements. In applying the initial test configuration and subsequent test configuration procedures, the 802.11 transmission configuration with the highest specified maximum output power and the channel within a test configuration with the highest measured maximum output power should be clearly distinguished to apply the procedures.

13. Conducted Power List

Remark: The output power WWAN/WLAN/Bluetooth was recorded in annex E of this report.

14. Carrier Aggregation

14.1. LTE Uplink Carrier Aggregation

➤ Carrier Aggregation Configuration

<Inter-band>

2CC Uplink Carrier Aggregation for Inter-band				
No.	Combination	4 X 4 MIMO	Restriction	Completely Covered by Measurement Superset
1	CA_4A-12A	-	-	No
2	CA_5A-66A	-	-	No
3	CA_12A-66A	-	-	No

Note:

According to October 2018 TCB Workshop publication, LTE uplink CA SAR assessment should follow:

- If the signal uplink 1-g SAR values for each band are both less than 0.8 W/kg and the algebraic summation of the 1-g SAR values are less than 1.45 W/kg no additional measurements need to be performed.
- If one or the signal uplink 1-g SAR values is greater than 0.8 W/kg, instead of algebraically summing the 1-g SAR values, sum up the SAR distributions, similar to the enlarged zoom scan (volume scan) procedures found in FCC KDB Publication 865664 D01. And PAG is required for this case.
- If the algebraic sum of the 1-g SAR values is > 1.45 W/kg additional measurements may have to be made. Submit a KDB inquiry for additional guidance. And PAG is required for this case.

14.2. LTE Downlink Carrier Aggregation

➤ Carrier Aggregation Configuration

For the device supports bands and bandwidths and configurations are provided as follow table was according to 3GPP.

Downlink Carrier Aggregation				
No.	Combination	DL MIMO 4 X 4	Restriction	Completely Covered by Measurement Superset
1	CA_2C	-	-	No
2	CA_41C	-	-	No
3	CA_66C	-	-	No

Downlink Carrier Aggregation				
No.	Combination	DL MIMO 2 X 2	Restriction	Completely Covered by Measurement Superset
1	CA_2A-4A	-	-	No
2	CA_2A-7A	-	-	No
3	CA_2A-2A	-	-	No
4	CA_2A-28A	-	-	No
5	CA_4A-4A	-	-	No
6	CA_4A-5A	-	-	No
7	CA_4A-7A	-	-	No
8	CA_4A-12A	-	-	No
9	CA_5B	-	-	No
10	CA_5A-7A	-	-	No
11	CA_5A-38A	-	-	No
12	CA_5A-41A	-	-	No
13	CA_5A-66A	-	-	No
14	CA_7A-66A	-	-	No
15	CA_12A-66A	-	-	No
16	CA_26A-38A	-	-	No
17	CA_26A-41A	-	-	No
18	CA_41A-41A	-	-	No
19	CA_66A-38A	-	-	No
20	CA_66A-66A	-	-	No

➤ **LTE Downlink Carrier Aggregation Conducted Power**

1. According to KDB941225 D05A v01r02, Uplink maximum output power measurement with downlink carrier aggregation active should be measured, using the highest output channel measured without downlink carrier aggregation, to confirm that uplink maximum output power with downlink carrier aggregation active remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output measured without downlink carrier aggregation active.
2. Uplink maximum output power with downlink carrier aggregation active does not show more than ¼ dB higher than the maximum output power without downlink carrier aggregation active, therefore SAR evaluation with downlink carrier aggregation active can be excluded.
3. For power measurement were control and acknowledge data is sent on uplink channels that operate identical to specifications when downlink carrier aggregation is inactive.
4. Selected highest measured power when downlink carrier aggregation is inactive for conducted power comparison with downlink carrier aggregation is active, to confirm that when downlink carrier aggregation is active uplink maximum output power remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output power measured when downlink carrier aggregation inactive.
5. For non-contiguous intra-band CA, the SCC selected to provide maximum separation from the PCC and must remain fully within the downlink transmission band.
6. For Intra-band, contiguous CA, the downlink channels selected to perform the uplink power measurement must satisfy
7. 3GPP channel spacing (5.4.1A of 3GPP TS 36.521 or equivalent) and channel bandwidth (5.4.2A) requirements.

$$\text{Nominal channel spacing} = \left\lceil \frac{BW_{\text{Channel}(1)} + BW_{\text{Channel}(2)} - 0.1|BW_{\text{Channel}(1)} - BW_{\text{Channel}(2)}|}{0.6} \right\rceil 0.3 \text{ [MHz]}$$

8. The output power of CA uplink & downlink was recorded in annex E of this report.

14.3. 5G NR Carrier Aggregation

➤ Carrier Aggregation Configuration

For the device supports bands and bandwidths and configurations are provided as follow table was according to 3GPP.

2CC Downlink Carrier Aggregation				
NO.	Combination	MIMO	Restriction	Completely Covered by Measurement Superset
1	CA_n2A-n77A	-	-	No
2	CA_n77(2A)	-	-	No
3	CA_n5A-n77A	-	-	No

Note:

- 3GPP channel spacing (5.4.1A of 3GPP TS 38.521 or equivalent) and channel bandwidth (5.3.2A) requirements.

For NR operating bands with 100 kHz channel raster:

$$\text{Nominal channel spacing} = \left\lfloor \frac{BW_{\text{Channel}(1)} + BW_{\text{Channel}(2)} - 2|GB_{\text{Channel}(1)} - GB_{\text{Channel}(2)}|}{0.6} \right\rfloor 0.3 \text{ [MHz]}$$

For NR operating bands with 15 kHz channel raster:

$$\text{Nominal channel spacing} = \left\lfloor \frac{BW_{\text{Channel}(1)} + BW_{\text{Channel}(2)} - 2|GB_{\text{Channel}(1)} - GB_{\text{Channel}(2)}|}{0.015 * 2^{n+1}} \right\rfloor 0.015 * 2^n \text{ [MHz]}$$

- The output power of CA downlink refers to the annex E of this report.

15. 5G NR EN-DC Consideration

➤ General Guidance

- a) It is operated at EN-DC (NSA) or SA for 5G NR implementation according to the character of the device. SAR measurement should be performed separately for the limitations of the probe calculation factors.
- b) When the EN-DC is active the output power of the LTE anchors is equal or less than the standalone carrier, therefore the LTE output power and SAR were estimated based on the standalone carrier to performed sim-TX analysis with 5G NR, WLAN and Bluetooth.
- c) According to October 2020 TCB Workshop publication, EN-DC SAR assessment should follow:
 - a. If the signal uplink 1-g SAR values for each band are both less than 0.8 W/kg and the algebraic summation of the 1-g SAR values are less than 1.45 W/kg no additional measurements need to be performed.
 - b. If one or the signal uplink 1-g SAR values is greater than 0.8 W/kg, instead of algebraically summing the 1-g SAR values, sum up the SAR distributions, similar to the enlarged zoom scan (volume scan) procedures found in FCC KDB Publication 865664 D01. And PAG is required for this case.
 - c. If the algebraic sum of the 1-g SAR values is > 1.45 W/kg additional measurements may have to be made. Submit a KDB inquiry for additional guidance and PAG is required for this case.
 - d. When the algebraic sum of the 1-g SAR values is > 1.6 W/kg, SPLSR analysis procedure should be applied.

➤ 5G NR Anchor Combination

5G-NR	EN-DC Combination	LTE Uplink	5G-NR Uplink	SCS (kHz)	Maximum Bandwidth (MHz)
TDD	DC_2A_n41A	2A	n41	30	100
TDD	DC_2C_n41A	2A	n41	30	100
FDD	DC_2A_n66A	2A	n66	15	40
TDD	DC_2A_n77A	2A	n77	30	100
TDD	DC_4A_n41A	4A	n41	30	100
FDD	DC_5A_n2A	5A	n2	15	40
FDD	DC_5A_n66A	5A	n66	15	40
TDD	DC_5A_n77A	5A	n77	30	100
FDD	DC_7A_n2A	7A	n2	15	40
FDD	DC_7A_n66A	7A	n66	15	40
TDD	DC_7A_n77A	7A	n77	30	100
FDD	DC_12A_n2A	12A	n2	15	40
TDD	DC_12A_n41A	12A	n41	30	100



TDD	DC_12A_n77A	12A	n77	30	100
FDD	DC_13A_n2A	13A	n2	15	40
FDD	DC_13A_n66A	13A	n66	30	100
TDD	DC_26A_n77A	26A	n77	30	100
FDD	DC_66A_n2A	66A	n2	15	40
FDD	DC_66A_n5A	66A	n5	15	20
TDD	DC_66A_n41A	66A	n41	30	100
TDD	DC_66A_n77A	66A	n77	30	100
TDD	DC_5A-7A_n77A	5A / 7A	n77	30	100

➤ **Maximum Power for EN-DC for Head**

EN-DC Configuration	LTE Signal Carrier				5G NR			
	Band	BW (MHz)	Maximum Power(dBm)		Band	BW (MHz)	Maximum Power(dBm)	
			Standalone	EN-DC Active			Standalone	EN-DC Active
DC_2A_n41A	2	20	/	17.5	n41	100	15.0	11.0
DC_2A_n66A	2	20	/	17.5	n66	40	17.0	14.0
DC_2A_n77A	2	20	/	17.5	n77	100	15.5	12.0
DC_4A_n41A	4	20	/	20.0	n41	100	15.0	11.0
DC_5A_n2A	5	10	25	25	n2	40	16.5	13.5
DC_5A_n66A	5	10	25	25	n66	40	17.0	14.0
DC_5A_n77A	5	10	25	25	n77	100	15.5	12.0
DC_7A_n2A	7	20	/	18.5	n2	40	16.5	13.5
DC_7A_n66A	7	20	/	18.5	n66	40	17.0	14.0
DC_7A_n77A	7	20	/	18.5	n77	100	15.5	12.0
DC_12A_n2A	12	10	25.5	25.5	n2	40	16.5	13.5
DC_12A_n41A	12	10	25.5	25.5	n41	100	15.0	11.0
DC_12A_n77A	12	10	25.5	25.5	n77	100	15.5	12.0
DC_13A_n2A	13	10	25.5	25.5	n2	40	16.5	13.5
DC_13A_n66A	13	10	25.5	25.5	n66	40	17.0	14.0
DC_26A_n77A	26	10	25.0	25.0	n77	100	15.5	12.0
DC_66A_n2A	66	20	/	20.0	n2	40	16.5	13.5
DC_66A_n5A	66	20	20.0	16.5	n5	20	24.0	24.0
DC_66A_n41A	66	20	/	20.0	n41	100	15.0	11.0
DC_66A_n77A	66	20	/	20.0	n77	100	15.5	12.0

➤ **Maximum Power for EN-DC for Body-worn**

EN-DC Configuration	LTE Signal Carrier				5G NR			
	Band	BW (MHz)	Maximum Power(dBm)		Band	BW (MHz)	Maximum Power(dBm)	
			Standalone	EN-DC Active			Standalone	EN-DC Active
DC_2A_n41A	2	20	/	22.0	n41	100	24.5	23.5
DC_2A_n66A	2	20	/	22.0	n66	40	24.5	22.0
DC_2A_n77A	2	20	/	22.0	n77	100	21.5	19.0
DC_4A_n41A	4	20	/	25.5	n41	100	24.5	23.5
DC_5A_n2A	5	10	25.0	25.0	n2	40	24.5	21
DC_5A_n66A	5	10	25.0	25.0	n66	40	24.5	22.0
DC_5A_n77A	5	10	25.0	25.0	n77	100	21.5	19.0
DC_7A_n2A	7	20	/	21.0	n2	40	24.5	21
DC_7A_n66A	7	20	/	21.0	n66	40	24.5	22.0
DC_7A_n77A	7	20	/	21.0	n77	100	21.5	19.0
DC_12A_n2A	12	10	25.5	25.5	n2	40	24.5	21
DC_12A_n41A	12	10	25.5	25.5	n41	100	24.5	23.5
DC_12A_n77A	12	10	25.5	25.5	n77	100	21.5	19.0
DC_13A_n2A	13	10	25.5	25.5	n2	40	24.5	21
DC_13A_n66A	13	10	25.5	25.5	n66	40	24.5	22.0
DC_26A_n77A	26	10	25.5	25.5	n77	100	21.5	19.0
DC_66A_n2A	66	20	/	25.5	n2	40	24.5	21
DC_66A_n5A	66	20	25.5	25.5	n5	20	24.0	24.0
DC_66A_n41A	66	20	/	25.5	n41	100	24.5	23.5
DC_66A_n77A	66	20	/	25.5	n77	100	21.5	19.0

➤ **Maximum Power for EN-DC for Hotspot**

EN-DC Configuration	LTE Signal Carrier				5G NR			
	Band	BW (MHz)	Maximum Power(dBm)		Band	BW (MHz)	Maximum Power(dBm)	
			Standalone	EN-DC Active			Standalone	EN-DC Active
DC_2A_n41A	2	20	/	21.5	n41	100	19.0	17.0
DC_2A_n66A	2	20	/	21.5	n66	40	21.5	18.0
DC_2A_n77A	2	20	/	21.5	n77	100	19.0	16.0
DC_4A_n41A	4	20	/	25.5	n41	100	19.0	17.0
DC_5A_n2A	5	10	25.0	21.5	n2	40	20.0	18.0
DC_5A_n66A	5	10	25.0	21.5	n66	40	21.5	18.0
DC_5A_n77A	5	10	25.0	21.5	n77	100	19.0	16.0
DC_7A_n2A	7	20	/	21.5	n2	40	20.0	18.0
DC_7A_n66A	7	20	/	21.5	n66	40	21.5	18.0
DC_7A_n77A	7	20	/	21.5	n77	100	19.0	16.0
DC_12A_n2A	12	10	25.5	25.5	n2	40	20.0	18.0
DC_12A_n41A	12	10	25.5	25.5	n41	100	19.0	17.0
DC_12A_n77A	12	10	25.5	25.5	n77	100	19.0	16.0
DC_13A_n2A	13	10	25.5	25.5	n2	40	20.0	18.0
DC_13A_n66A	13	10	25.5	25.5	n66	40	21.5	18.0
DC_26A_n77A	26	10	25.0	25.0	n77	100	19.0	16.0
DC_66A_n2A	66	20	/	25.5	n2	40	20.0	18.0
DC_66A_n5A	66	20	23.0	20.5	n5	20	24.0	21.0
DC_66A_n41A	66	20	/	25.5	n41	100	19.0	17.0
DC_66A_n77A	66	20	/	25.5	n77	100	19.0	16.0

16. Hotspot Mode Evaluation Procedure

➤ EUT Antenna Location

The location of antenna was recorded in annex B

ANT 0:

TRX: GSM 850, WCDMA Band V, LTE Band 5/12/13/17/26/71, 5G NR n5/71

DRX: GSM 1900, WCDMA Band II/IV, LTE Band 2/4/7/25/38/41/66, 5G NR n2/25/66/41

ANT 1:

DRX: 5G NR n77

ANT 2:

PRX MIMO: GSM 1900, WCDMA Band II/IV, LTE Band 2/4/7/25/38/41/66, 5G NR n2/25/66/41/77

TX (for ENDC): LTE Band 2/4/7/66

ANT 3:

TRX: GSM 1900, WCDMA Band II/IV, LTE Band 2/4/7/25/38/41/66, 5G NR n2/25/66/41

DRX: GSM 850, WCDMA Band V, LTE Band 5/12/13/17/26/71, 5G NR n5/71

ANT 4:

TRX: 5G NR n77

ANT 5:

TX: WLAN 2.4GHz/5GHz, Bluetooth; RX: GPS L1

ANT 6:

DRX MIMO: GSM 1900, WCDMA Band II/IV, LTE Band 2/4/7/25/38/41/66, 5G NR n2/25/66/41

ANT 7:

DRX MIMO: 5G NR n77

➤ EUT Antenna Distance

Antenna Location	Front	Back	Left	Right	Top	Bottom
ANT 0	<5mm	<5mm	<25mm	<5mm	>25mm	<5mm
ANT 2	<5mm	<5mm	<5mm	>25mm	<25mm	>25mm
ANT 3	<5mm	<5mm	<5mm	>25mm	<5mm	>25mm
ANT 4	<5mm	<5mm	>25mm	<25mm	<5mm	>25mm
ANT 5	<5mm	<5mm	>25mm	<5mm	<5mm	>25mm



➤ **Hotspot Evaluation**


Assessment	Hotspot Side for SAR Test Distance: 10mm					
Antennas	Front	Back	Left	Right	Top	Bottom
ANT 0	Yes	Yes	Yes	Yes	No	Yes
ANT 2	Yes	Yes	Yes	No	Yes	No
ANT 3	Yes	Yes	Yes	No	Yes	No
ANT 4	Yes	Yes	No	Yes	Yes	No
ANT 5	Yes	Yes	No	Yes	Yes	No

Note :

3. The SAR evaluation procedures for Portable Devices with Wireless Router function is according to KDB 941225 D06 Hotspot SAR v02r01.
4. Head/Body-worn/Hotspot mode SAR assessments are required.
5. Referring to KDB 941225 D06, when the overall device length and width are $\geq 9\text{cm} \times 5\text{cm}$, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge.

17. Block Diagram of the Tests to be Performed

17.1. Head

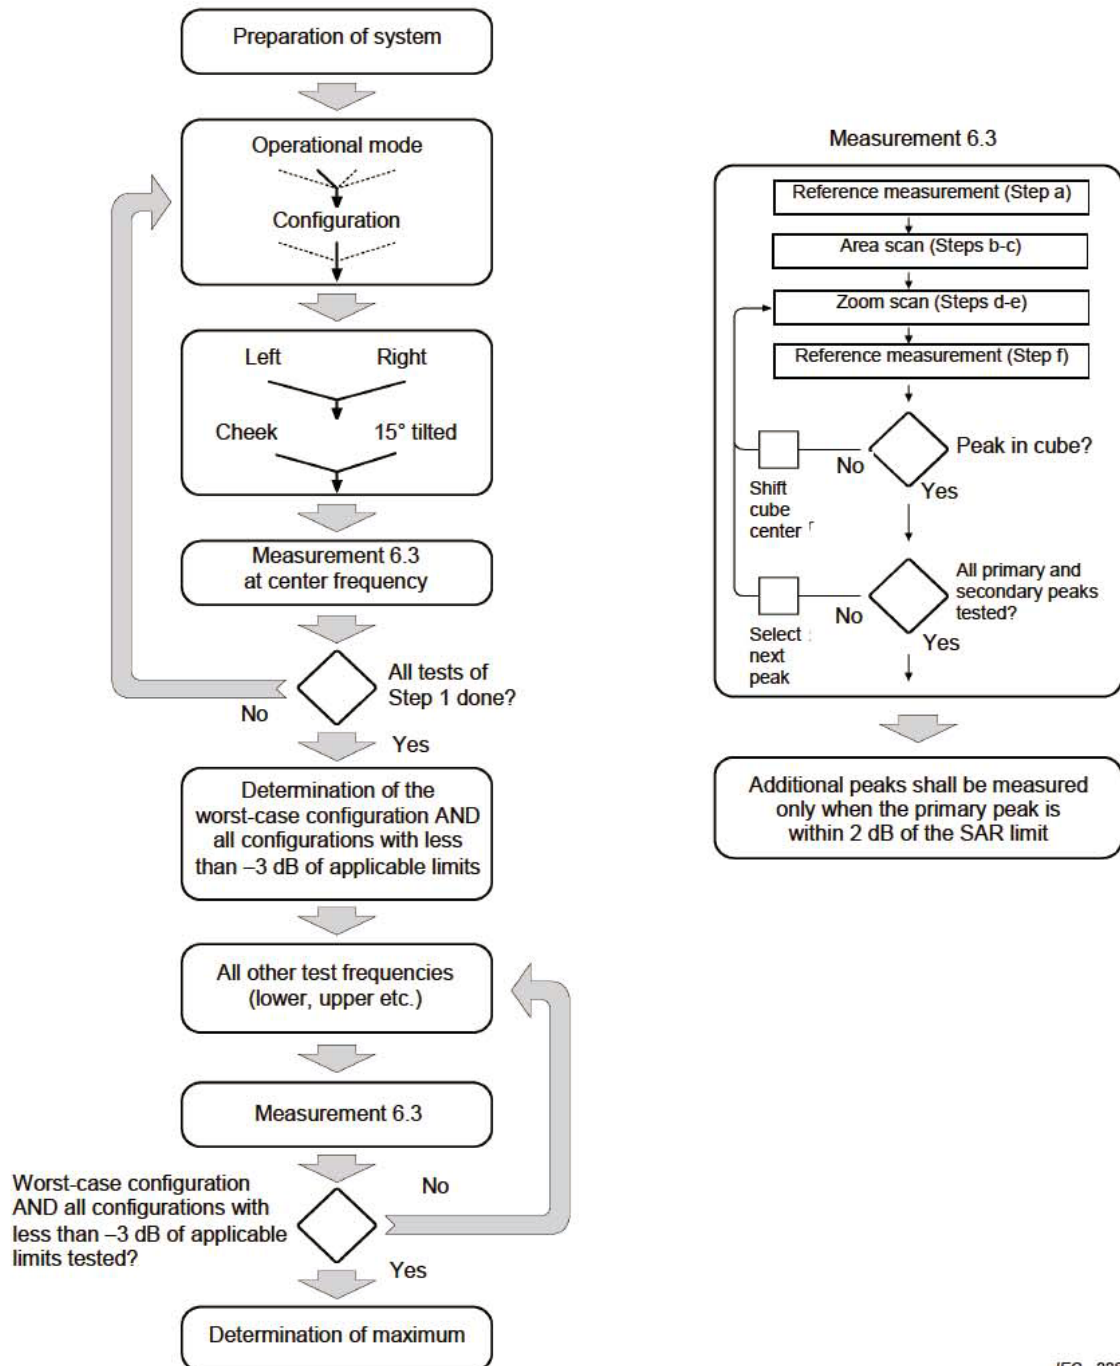

IEC 228/05

17.2. Body

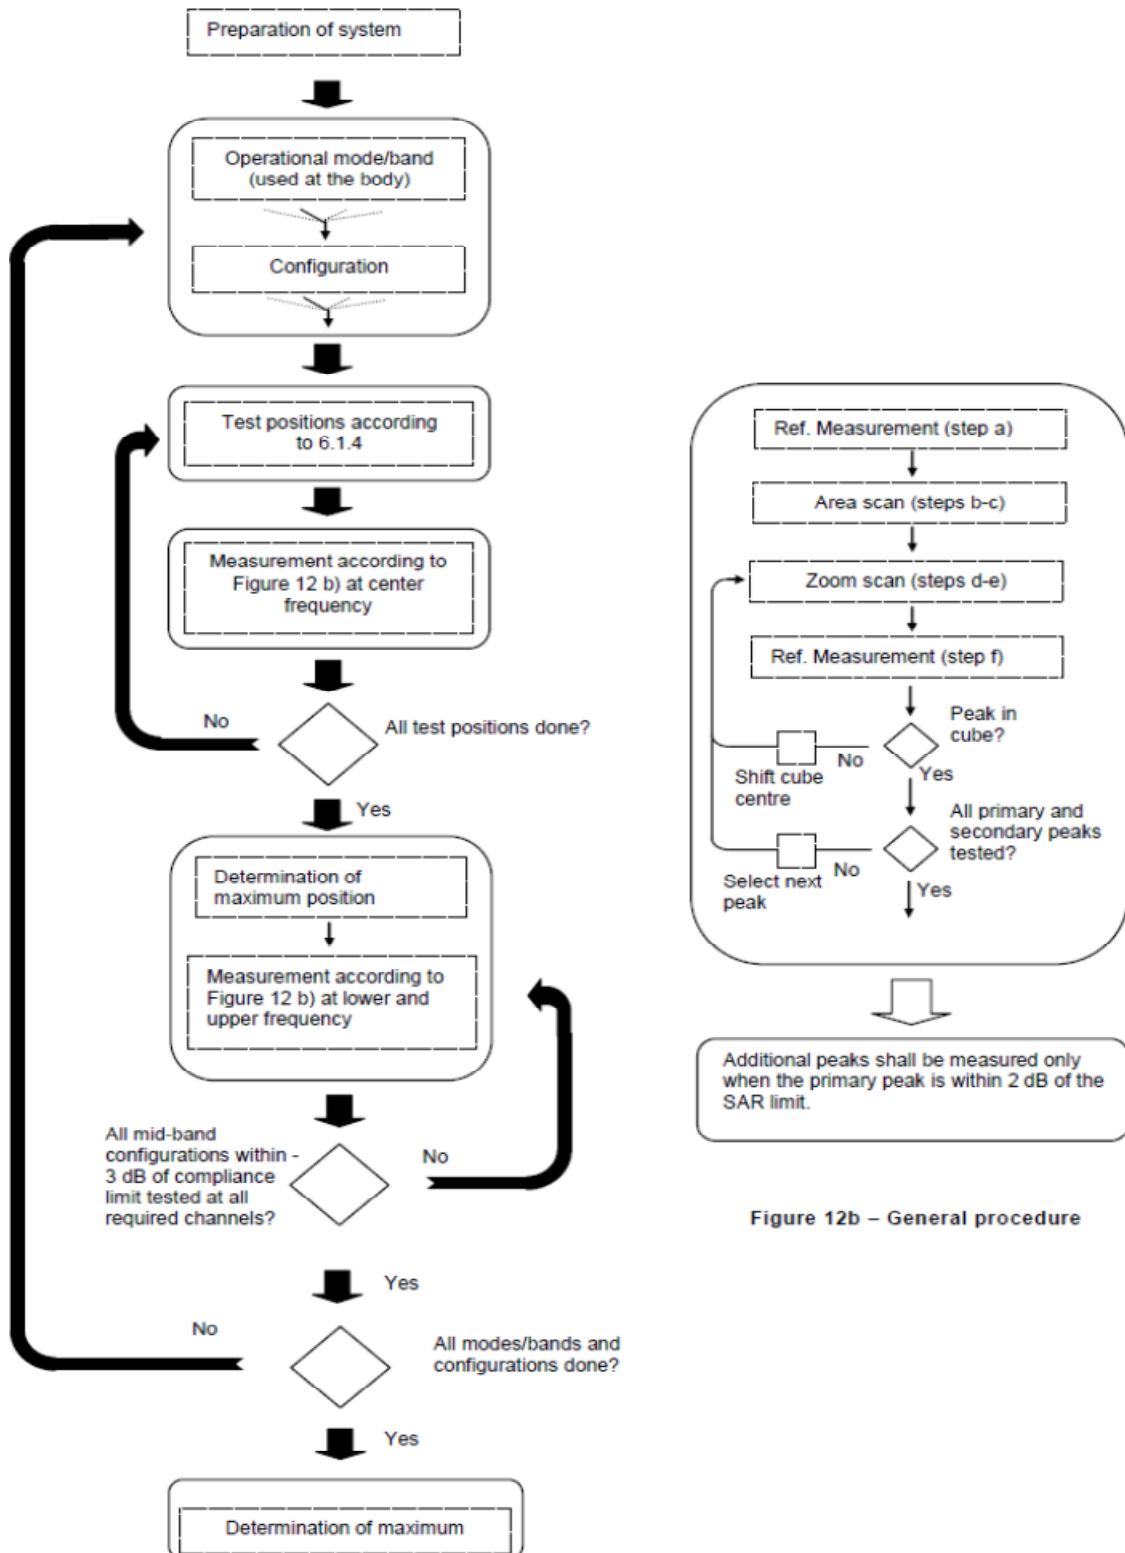


Figure 12b – General procedure

18. Proximity Sensor Considerations

18.1. Proximity Sensor Triggering Distances

➤ P-sensor Triggering Distance Testing

The EUT should be moved further away from and toward the flat phantom that fill with the tissue simulating liquid to determine the proximity sensor triggering distances. Conducted power is monitored qualitatively to identify the general triggering characteristics and recorded quantitatively, versus spacing, as required by the procedures.

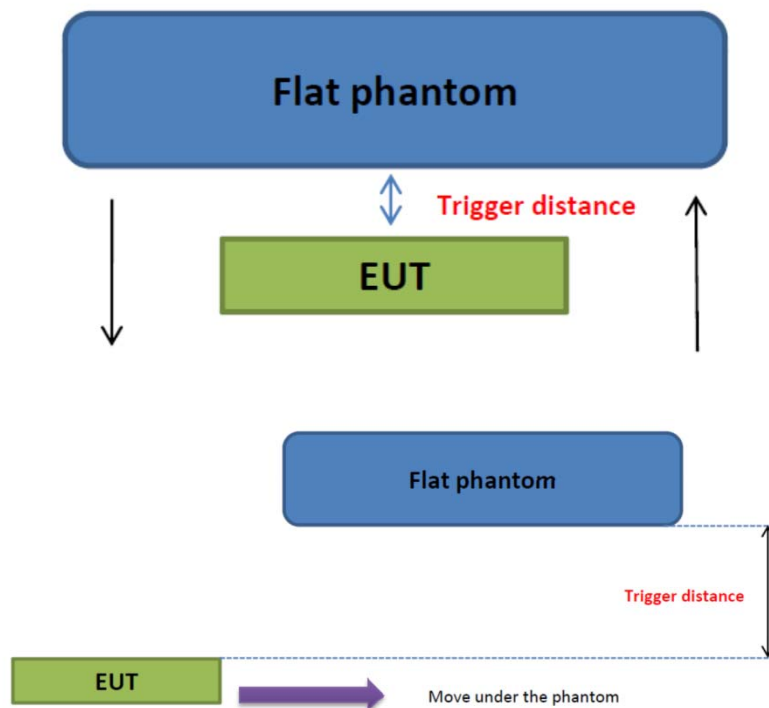


Fig.17.1 Illustration for proximity sensor trigger

➤ P-sensor Triggering Distance

Proximity Sensor Trigger Distance (mm)						
Exposure Position	Front Side	Back Side	Left Side	Right Side	Top Side	Bottom Side
Minimum (CS 0)	22	32	/	17	/	31
Minimum (CS 2)	19	21	/	19	21	/
Minimum (CS 3)	19	27	20	/	36	/



18.2. Proximity Sensor Coverage

Proximity sensors are not normally designed to cover the entire back surface or edges of a smart phone. The sensing regions are usually limited to areas near the sensor element. If a sensor is spatially offset from the antenna(s), it is necessary to verify sensor triggering for conditions where the antenna is next to the user but the sensor is laterally further away to ensure sensor coverage is sufficient for reducing the power to maintain compliance. For P-sensor coverage testing, the device is moved and “along the direction of maximum antenna and sensor offset”. Illustrating in the internal photo exhibit, although the sensor spatially offset, there is no trigger condition where the antenna is next to the user, the sensor is laterally further away, therefore proximity sensor coverage testing is not required. This procedure is not required since the antenna, sensor and peak SAR location is overlapped with the sensor.

19. Test Results List

19.1. Test Guidance

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1 / (duty cycle)".
 - c. For WWAN: Reported SAR (W/kg) = Measured SAR (W/kg) * Tune-up Scaling Factor.
 - d. For WLAN/Bluetooth: Reported SAR (W/kg) = Measured SAR (W/kg) * Duty Cycle scaling factor * Tune-up scaling factor.
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - a. ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - b. ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - c. ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
4. Per KDB 648474 D04v01r03, when the reported SAR for a body-worn accessory measured without a headset connected to the handset is ≤ 1.2 W/kg, SAR testing with a headset connected to the handset is not required.
5. Per KDB648474 D04v01r03, for smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm, when hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg, however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for tablet modes to compare with the 1.2 W/kg SAR test reduction threshold.
6. Per KDB248227 D01v02r02, a Wi-Fi device must be configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools for SAR measurement. The test frequencies established using test mode must correspond to the actual channel frequencies required for operations in the U.S. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92 - 96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. In addition, a periodic

transmission duty factor is required for current generation SAR systems to measure SAR correctly. Unless it is permitted by specific KDB procedures or continuous transmission is specifically restricted by the device, the reported SAR must be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit. When a device is not capable of sustaining continuous transmission or the output can become nonlinear, and it is limited by hardware design and unable to transmit at higher than 85% duty factor, a periodic duty factor within 15% of the maximum duty factor the device is capable of transmitting should be used. The reported SAR must be scaled to the maximum transmission duty factor to determine compliance. Descriptions of the procedures applied to establish the specific duty factor used for SAR testing are required in SAR reports to support the test results.

7. For CA UL SAR measurement, the worst condition of standalone transmission would be tested.
8. When the receiver is active, the hotspot is on/off and SAR sensor is on/off, the reduced power level 1 (SISO) & Reduced power level 4 (for ENDC/CA) will be applied to WWAN/WLAN and used to head SAR testing.
9. When the receiver is tuned off, the hotspot is off and SAR sensor is on, the reduced power level 2 (for SISO) & reduced power level 5 (for ENDC/CA) will be applied to WWAN/WLAN and used to extremity & Body-worn SAR testing.
10. When the receiver is tuned off, the hotspot is active and SAR sensor is on/off, the reduced power level 3 (for SISO) & reduced power level 6 (for ENDC/CA) will be applied to WWAN/WLAN and used to hotspot SAR testing.
11. When the receiver is tuned off, the hotspot is off and SAR sensor is off, the full power will be applied to WWAN/WLAN and used to head & body-worn & hotspot SAR testing.
12. The LTE Band 2/4/7/66 in Ant 2 is only transmitted in the EN-DC combination state and does not support independent transmission.
13. The Power level condition applied should be follow:

Transmission Condition	Wireless System	Antenna	Head	Hotspot
Standalone	GSM 850	ANT 0	Full Power	Full Power
	GSM 1900	ANT 3	Reduced Power Level 1	Reduced Power Level 3
	WCDMA Band II	ANT 3	Reduced Power Level 1	Reduced Power Level 3
	WCDMA Band IV	ANT 3	Reduced Power Level 1	Reduced Power Level 3
	WCDMA Band V	ANT 0	Full Power	Full Power
	LTE Band 2	ANT 3	Reduced Power Level 1	Reduced Power Level 3
	LTE Band 5	ANT 0	Full Power	Full Power
	LTE Band 7	ANT 3	Reduced Power Level 1	Reduced Power Level 3
	LTE Band 12/17	ANT 0	Full Power	Full Power
	LTE Band 13	ANT 0	Full Power	Full Power
	LTE Band 25	ANT 3	Reduced Power Level 1	Reduced Power Level 3



	LTE Band 26	ANT 0	Full Power	Full Power
	LTE Band 38	ANT 3	Reduced Power Level 1	Reduced Power Level 3
	LTE Band 41	ANT 3	Reduced Power Level 1	Reduced Power Level 3
	LTE Band 66/4	ANT 3	Reduced Power Level 1	Reduced Power Level 3
	LTE Band 71	ANT 0	Full Power	Full Power
	5G NR n2	ANT 3	Reduced Power Level 1	Reduced Power Level 3
	5G NR n5	ANT 0	Full Power	Full Power
	5G NR n25	ANT 3	Reduced Power Level 1	Reduced Power Level 3
	5G NR n41	ANT 3	Reduced Power Level 1	Reduced Power Level 3
	5G NR n66	ANT 3	Reduced Power Level 1	Reduced Power Level 3
	5G NR n71	ANT 0	Full Power	Full Power
	5G NR n77	ANT 3	Reduced Power Level 1	Reduced Power Level 3
	WLAN 2.4GHz	ANT 5	Reduced Power Level 1	Reduced Power Level 3
	WLAN 5.2GHz	ANT 5	Reduced Power Level 1	Reduced Power Level 3
	WLAN 5.3GHz	ANT 5	Reduced Power Level 1	/
	WLAN 5.5GHz	ANT 5	Reduced Power Level 1	/
	WLAN 5.8GHz	ANT 5	Reduced Power Level 1	Reduced Power Level 3
	Bluetooth	ANT 5	/	Full Power

Transmission Condition	Wireless System	Antenna	Body-worn	Extremity
Standalone	GSM 850	ANT 0	Full Power	/
	GSM 1900	ANT 3	Full Power	/
	WCDMA Band II	ANT 3	Full Power	/
	WCDMA Band IV	ANT 3	Full Power	/
	WCDMA Band V	ANT 0	Full Power	/
	LTE Band 2	ANT 3	Full Power	/
	LTE Band 5	ANT 0	Full Power	/
	LTE Band 7	ANT 3	Full Power	/
	LTE Band 12/17	ANT 0	Full Power	/
	LTE Band 13	ANT 0	Full Power	/
	LTE Band 25	ANT 3	Full Power	/
	LTE Band 26	ANT 0	Full Power	/
	LTE Band 38	ANT 3	Full Power	/
	LTE Band 41	ANT 3	Full Power	/



	LTE Band 66/4	ANT 3	Full Power	/
	LTE Band 71	ANT 0	Full Power	/
	5G NR n2	ANT 3	Full Power	/
	5G NR n5	ANT 0	Full Power	/
	5G NR n25	ANT 3	Full Power	/
	5G NR n41	ANT 3	Reduced Power Level 2	/
	5G NR n66	ANT 3	Full Power	/
	5G NR n71	ANT 0	Full Power	/
	5G NR n77	ANT 3	Reduced Power Level 2	/
	WLAN 2.4GHz	ANT 5	Full Power	/
	WLAN 5.2GHz	ANT 5	Full Power	/
	WLAN 5.3GHz	ANT 5	Full Power	Reduced Power Level 2
	WLAN 5.5GHz	ANT 5	Full Power	Reduced Power Level 2
	WLAN 5.8GHz	ANT 5	Full Power	/
	Bluetooth	ANT 5	Full Power	/

Transmission Condition	Wireless System	Antenna	Head	Hotspot
EN-DC / CA	GSM 850	ANT 0	Full Power	Full Power
	GSM 1900	ANT 3	Reduced Power Level 1	Reduced Power Level 3
	WCDMA Band II	ANT 3	Reduced Power Level 1	Reduced Power Level 3
	WCDMA Band IV	ANT 3	Reduced Power Level 1	Reduced Power Level 3
	WCDMA Band V	ANT 0	Full Power	Full Power
	LTE Band 2	ANT 3	Reduced Power Level 1	Reduced Power Level 3
		ANT 2	Reduced Power Level 4	Reduced Power Level 6
	LTE Band 5	ANT 0	Full Power	Reduced Power Level 6
	LTE Band 7	ANT 3	Reduced Power Level 1	Reduced Power Level 3
		ANT 2	Reduced Power Level 4	Reduced Power Level 6
	LTE Band 12/17	ANT 0	Full Power	Full Power
	LTE Band 13	ANT 0	Full Power	Reduced Power Level 6
	LTE Band 25	ANT 3	Reduced Power Level 1	Reduced Power Level 3
	LTE Band 26	ANT 0	Full Power	Reduced Power Level 6
	LTE Band 38	ANT 3	Reduced Power Level 1	Reduced Power Level 3
	LTE Band 41	ANT 3	Reduced Power Level 1	Reduced Power Level 3
	LTE Band 66/4	ANT 3	Reduced Power Level 4	Reduced Power Level 6



		ANT 2	Reduced Power Level 4	Full Power
	LTE Band 71	ANT 0	Full Power	Full Power
	5G NR n2	ANT 3	Reduced Power Level 4	Reduced Power Level 6
	5G NR n5	ANT 0	Full Power	Reduced Power Level 6
	5G NR n25	ANT 3	Reduced Power Level 1	Reduced Power Level 3
	5G NR n41	ANT 3	Reduced Power Level 4	Reduced Power Level 6
	5G NR n66	ANT 3	Reduced Power Level 4	Reduced Power Level 6
	5G NR n71	ANT 0	Full Power	Full Power
	5G NR n77	ANT 3	Reduced Power Level 4	Reduced Power Level 6
	WLAN 2.4GHz	ANT 5	Reduced Power Level 1	Reduced Power Level 3
	WLAN 5.2GHz	ANT 5	Reduced Power Level 1	Reduced Power Level 3
	WLAN 5.3GHz	ANT 5	Reduced Power Level 1	/
	WLAN 5.5GHz	ANT 5	Reduced Power Level 1	/
	WLAN 5.8GHz	ANT 5	Reduced Power Level 1	Reduced Power Level 3
	Bluetooth	ANT 5	/	Full Power

Transmission Condition	Wireless System	Antenna	Body-worn	Extremity
EN-DC / CA	GSM 850	ANT 0	Full Power	/
	GSM 1900	ANT 3	Full Power	/
	WCDMA Band II	ANT 3	Full Power	/
	WCDMA Band IV	ANT 3	Full Power	/
	WCDMA Band V	ANT 0	Full Power	/
	LTE Band 2	ANT 3	Full Power	/
		ANT 2	Reduced Power Level 5	/
	LTE Band 5	ANT 0	Full Power	/
	LTE Band 7	ANT 3	Full Power	/
		ANT 2	Reduced Power Level 5	/
	LTE Band 12/17	ANT 0	Full Power	/
	LTE Band 13	ANT 0	Full Power	/
	LTE Band 25	ANT 3	Full Power	/
	LTE Band 26	ANT 0	Full Power	/
	LTE Band 38	ANT 3	Full Power	/
	LTE Band 41	ANT 3	Full Power	/
	LTE Band 66/4	ANT 3	Full Power	/

		ANT 2	Full Power	/
	LTE Band 71	ANT 0	Full Power	/
	5G NR n2	ANT 3	Full Power	/
	5G NR n5	ANT 0	Full Power	/
	5G NR n25	ANT 3	Full Power	/
	5G NR n41	ANT 3	Reduced Power Level 2	/
	5G NR n66	ANT 3	Full Power	/
	5G NR n71	ANT 0	Full Power	/
	5G NR n77	ANT 3	Reduced Power Level 2	/
	WLAN 2.4GHz	ANT 5	Full Power	/
	WLAN 5.2GHz	ANT 5	Full Power	/
	WLAN 5.3GHz	ANT 5	Full Power	Reduced Power Level 2
	WLAN 5.5GHz	ANT 5	Full Power	Reduced Power Level 2
	WLAN 5.8GHz	ANT 5	Full Power	/
	Bluetooth	ANT 5	Full Power	/

14. The 5G NR (NSA) SAR measurement procedure should be followed the TCB workshop publication in October 2020:
- If the signal uplink 1-g SAR values for each band are both less than 0.8 W/kg and the algebraic summation of the 1-g SAR values are less than 1.45 W/kg no additional measurements need to be performed.
 - If one or the signal uplink 1-g SAR values is greater than 0.8 W/kg, instead of algebraically summing the 1-g SAR values, sum up the SAR distributions, similar to the enlarged zoom scan (volume scan) procedures found in FCC KDB Publication 865664 D01. And PAG is required for this case.
 - If the algebraic sum of the 1-g SAR values is > 1.45 W/kg additional measurements may have to be made. Submit a KDB inquiry for additional guidance and PAG is required for this case.
 - When the algebraic sum of the 1-g SAR values is > 1.6 W/kg, SPLSR analysis procedure should be applied.



19.2. Head SAR Data

➤ GSM Head SAR

Plot No.	Band/Mode	Test Position	CH.	Ave. Power (dBm)	Tune-up Limit (dBm)	Tune-up Scaling Factor	Meas. SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
Full Power (ANT 0)								
1#	GPRS 850(4 TX slots)	Right Cheek	189	29.55	30.50	1.245	0.455	0.566
	GPRS 850(4 TX slots)	Right Tilt	189	29.55	30.50	1.245	0.283	0.352
	GPRS 850(4 TX slots)	Left Cheek	189	29.55	30.50	1.245	0.327	0.407
	GPRS 850(4 TX slots)	Left Tilt	189	29.55	30.50	1.245	0.198	0.246
Reduced Power Level 1 (ANT 3)								
2#	GPRS 1900(2 TX slots)	Right Cheek	661	23.95	25.50	1.429	0.803	1.147
	GPRS 1900(2 TX slots)	Right Tilt	661	23.95	25.50	1.429	0.591	0.844
	GPRS 1900(2 TX slots)	Left Cheek	661	23.95	25.50	1.429	0.417	0.596
	GPRS 1900(2 TX slots)	Left Tilt	661	23.95	25.50	1.429	0.474	0.677
	GPRS 1900(2 TX slots)	Right Cheek	512	23.91	25.50	1.442	0.729	1.051
	GPRS 1900(2 TX slots)	Right Cheek	810	23.93	25.50	1.435	0.794	1.140
	GPRS 1900(2 TX slots)	Right Tilt	512	23.91	25.50	1.442	0.510	0.735
	GPRS 1900(2 TX slots)	Right Tilt	810	23.93	25.50	1.435	0.549	0.788

➤ WCDMA Head SAR

Plot No.	Band/Mode	Test Position	CH.	Ave. Power (dBm)	Tune-up Limit (dBm)	Tune-up Scaling Factor	Meas. SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
Reduced Power Level 1 (ANT 3)								
3#	Band II/RMC 12.2Kbps	Right Cheek	9400	17.29	18.50	1.321	0.838	1.107
	Band II/RMC 12.2Kbps	Right Tilt	9400	17.29	18.50	1.321	0.665	0.879
	Band II/RMC 12.2Kbps	Left Cheek	9400	17.29	18.50	1.321	0.432	0.571
	Band II/RMC 12.2Kbps	Left Tilt	9400	17.29	18.50	1.321	0.445	0.588
	Band II/RMC 12.2Kbps	Right Cheek	9262	17.26	18.50	1.330	0.726	0.966
	Band II/RMC 12.2Kbps	Right Cheek	9538	17.28	18.50	1.324	0.747	0.989
	Band II/RMC 12.2Kbps	Right Tilt	9262	17.26	18.50	1.330	0.601	0.800
	Band II/RMC 12.2Kbps	Right Tilt	9538	17.28	18.50	1.324	0.667	0.883
Reduced Power Level 1 (ANT 3)								
	Band IV/RMC 12.2Kbps	Right Cheek	1413	18.99	20.00	1.262	0.787	0.993
	Band IV/RMC 12.2Kbps	Right Tilt	1413	18.99	20.00	1.262	0.709	0.895
	Band IV/RMC 12.2Kbps	Left Cheek	1413	18.99	20.00	1.262	0.465	0.587
	Band IV/RMC 12.2Kbps	Left Tilt	1413	18.99	20.00	1.262	0.551	0.695



REPORT No.: SZ24060309S01

	Band IV/RMC 12.2Kbps	Right Cheek	1312	18.94	20.00	1.276	0.740	0.945
4#	Band IV/RMC 12.2Kbps	Right Cheek	1513	18.96	20.00	1.271	0.856	1.088
	Band IV/RMC 12.2Kbps	Right Tilt	1312	18.94	20.00	1.276	0.726	0.927
	Band IV/RMC 12.2Kbps	Right Tilt	1513	18.96	20.00	1.271	0.819	1.041
Full Power (ANT 0)								
5#	Band V/RMC 12.2Kbps	Right Cheek	4182	24.15	25.50	1.365	0.434	0.592
	Band V/RMC 12.2Kbps	Right Tilt	4182	24.15	25.50	1.365	0.196	0.267
	Band V/RMC 12.2Kbps	Left Cheek	4182	24.15	25.50	1.365	0.331	0.452
	Band V/RMC 12.2Kbps	Left Tilt	4182	24.15	25.50	1.365	0.181	0.247

➤ **LTE QPSK Head SAR**

Plot No.	Band/Mode	Test Position	CH.	Ave. Power (dBm)	Tune-up Limit (dBm)	Tune-up Scaling Factor	Meas. SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
Reduced Power Level 1 (ANT 3)								
	LTE Band 2/1RB#0 20M	Right Cheek	18900	17.01	18.50	1.409	0.633	0.892
	LTE Band 2/1RB#0 20M	Right Tilt	18900	17.01	18.50	1.409	0.524	0.738
	LTE Band 2/1RB#0 20M	Left Cheek	18900	17.01	18.50	1.409	0.397	0.559
	LTE Band 2/1RB#0 20M	Left Tilt	18900	17.01	18.50	1.409	0.273	0.385
	LTE Band 2/1RB#0 20M	Right Cheek	18700	16.94	18.50	1.432	0.634	0.908
6#	LTE Band 2/1RB#0 20M	Right Cheek	19100	16.95	18.50	1.429	0.657	0.939
	LTE Band 2/50RB#0 20M	Right Cheek	18900	15.93	17.50	1.435	0.633	0.909
	LTE Band 2/50RB#0 20M	Right Tilt	18900	15.93	17.50	1.435	0.519	0.745
	LTE Band 2/50RB#0 20M	Left Cheek	18900	15.93	17.50	1.435	0.327	0.469
	LTE Band 2/50RB#0 20M	Left Tilt	18900	15.93	17.50	1.435	0.262	0.376
	LTE Band 2/50RB#0 20M	Right Cheek	18700	15.88	17.50	1.452	0.632	0.918
	LTE Band 2/50RB#0 20M	Right Cheek	19100	15.84	17.50	1.466	0.621	0.910
	LTE Band 2/100RB#0 20M	Right Cheek	18900	15.75	17.50	1.496	0.584	0.874
Reduced Power Level 4 for ENDC (ANT 2)								
	LTE Band 2/1RB#0 20M	Right Cheek	18900	16.01	17.50	1.409	0.469	0.661
	LTE Band 2/1RB#0 20M	Right Tilt	18900	16.01	17.50	1.409	0.103	0.145
	LTE Band 2/1RB#0 20M	Left Cheek	18900	16.01	17.50	1.409	0.291	0.410
	LTE Band 2/1RB#0 20M	Left Tilt	18900	16.01	17.50	1.409	0.069	0.097
	LTE Band 2/50RB#0 20M	Right Cheek	18900	14.93	16.50	1.435	0.247	0.355
	LTE Band 2/50RB#0 20M	Right Tilt	18900	14.93	16.50	1.435	0.060	0.086
	LTE Band 2/50RB#0 20M	Left Cheek	18900	14.93	16.50	1.435	0.141	0.202
	LTE Band 2/50RB#0 20M	Left Tilt	18900	14.93	16.50	1.435	0.037	0.053
Full Power (ANT 0)								
7#	LTE Band 5/1RB#0 10M	Right Cheek	20525	23.69	25.00	1.352	0.323	0.437



	LTE Band 5/1RB#0 10M	Right Tilt	20525	23.69	25.00	1.352	0.192	0.260
	LTE Band 5/1RB#0 10M	Left Cheek	20525	23.69	25.00	1.352	0.272	0.368
	LTE Band 5/1RB#0 10M	Left Tilt	20525	23.69	25.00	1.352	0.159	0.215
	LTE Band 5/25RB#0 10M	Right Cheek	20525	22.55	24.00	1.396	0.247	0.345
	LTE Band 5/25RB#0 10M	Right Tilt	20525	22.55	24.00	1.396	0.129	0.180
	LTE Band 5/25RB#0 10M	Left Cheek	20525	22.55	24.00	1.396	0.234	0.327
	LTE Band 5/25RB#0 10M	Left Tilt	20525	22.55	24.00	1.396	0.123	0.172
Reduced Power Level 1 (ANT 3)								
	LTE Band 7/1RB#0 20M	Right Cheek	21100	13.58	15.00	1.387	0.588	0.815
	LTE Band 7/1RB#0 20M	Right Tilt	21100	13.58	15.00	1.387	0.541	0.750
	LTE Band 7/1RB#0 20M	Left Cheek	21100	13.58	15.00	1.387	0.158	0.219
	LTE Band 7/1RB#0 20M	Left Tilt	21100	13.58	15.00	1.387	0.185	0.257
	LTE Band 7/1RB#0 20M	Right Cheek	20850	13.49	15.00	1.416	0.572	0.810
	LTE Band 7/1RB#0 20M	Right Cheek	21350	13.50	15.00	1.413	0.556	0.785
	LTE Band 7/50RB#0 20M	Right Cheek	21100	12.47	14.00	1.422	0.583	0.829
	LTE Band 7/50RB#0 20M	Right Tilt	21100	12.47	14.00	1.422	0.536	0.762
	LTE Band 7/50RB#0 20M	Left Cheek	21100	12.47	14.00	1.422	0.166	0.236
	LTE Band 7/50RB#0 20M	Left Tilt	21100	12.47	14.00	1.422	0.187	0.266
	LTE Band 7/50RB#0 20M	Right Cheek	20850	12.42	14.00	1.439	0.576	0.829
8#	LTE Band 7/50RB#0 20M	Right Cheek	21350	12.32	14.00	1.472	0.592	0.872
	LTE Band 7/100RB#0 20M	Right Cheek	21100	12.36	14.00	1.459	0.518	0.756
Reduced Power Level 4 for ENDC (ANT 2)								
	LTE Band 7/1RB#0 20M	Right Cheek	21100	17.11	18.50	1.377	0.357	0.492
	LTE Band 7/1RB#0 20M	Right Tilt	21100	17.11	18.50	1.377	0.143	0.197
	LTE Band 7/1RB#0 20M	Left Cheek	21100	17.11	18.50	1.377	0.164	0.226
	LTE Band 7/1RB#0 20M	Left Tilt	21100	17.11	18.50	1.377	0.078	0.108
	LTE Band 7/50RB#0 20M	Right Cheek	21100	16.00	17.50	1.413	0.196	0.277
	LTE Band 7/50RB#0 20M	Right Tilt	21100	16.00	17.50	1.413	0.081	0.115
	LTE Band 7/50RB#0 20M	Left Cheek	21100	16.00	17.50	1.413	0.091	0.128
	LTE Band 7/50RB#0 20M	Left Tilt	21100	16.00	17.50	1.413	0.044	0.062
Full Power (ANT 0)								
	LTE Band 12/1RB#0 10M	Right Cheek	23095	24.08	25.50	1.387	0.297	0.412
	LTE Band 12/1RB#0 10M	Right Tilt	23095	24.08	25.50	1.387	0.172	0.239
9#	LTE Band 12/1RB#0 10M	Left Cheek	23095	24.08	25.50	1.387	0.310	0.430
	LTE Band 12/1RB#0 10M	Left Tilt	23095	24.08	25.50	1.387	0.139	0.193
	LTE Band 12/25RB#0 10M	Right Cheek	23095	22.90	24.50	1.445	0.267	0.386
	LTE Band 12/25RB#0 10M	Right Tilt	23095	22.90	24.50	1.445	0.136	0.197
	LTE Band 12/25RB#0 10M	Left Cheek	23095	22.90	24.50	1.445	0.237	0.343



REPORT No.: SZ24060309S01

	LTE Band 12/25RB#0 10M	Left Tilt	23095	22.90	24.50	1.445	0.105	0.152
Full Power (ANT 0)								
10#	LTE Band 13/1RB#0 10M	Right Cheek	23230	24.18	25.50	1.355	0.395	0.535
	LTE Band 13/1RB#0 10M	Right Tilt	23230	24.18	25.50	1.355	0.154	0.209
	LTE Band 13/1RB#0 10M	Left Cheek	23230	24.18	25.50	1.355	0.308	0.417
	LTE Band 13/1RB#0 10M	Left Tilt	23230	24.18	25.50	1.355	0.141	0.191
	LTE Band 13/25RB#0 10M	Right Cheek	23230	23.17	24.50	1.358	0.312	0.424
	LTE Band 13/25RB#0 10M	Right Tilt	23230	23.17	24.50	1.358	0.117	0.159
	LTE Band 13/25RB#0 10M	Left Cheek	23230	23.17	24.50	1.358	0.244	0.331
	LTE Band 13/25RB#0 10M	Left Tilt	23230	23.17	24.50	1.358	0.113	0.153
Reduced Power Level 1 (ANT 3)								
	LTE Band 25/1RB#0 20M	Right Cheek	26365	17.55	19.00	1.396	0.676	0.944
	LTE Band 25/1RB#0 20M	Right Tilt	26365	17.55	19.00	1.396	0.575	0.803
	LTE Band 25/1RB#0 20M	Left Cheek	26365	17.55	19.00	1.396	0.431	0.602
	LTE Band 25/1RB#0 20M	Left Tilt	26365	17.55	19.00	1.396	0.425	0.593
	LTE Band 25/1RB#0 20M	Right Cheek	26140	17.54	19.00	1.400	0.671	0.939
	LTE Band 25/1RB#0 20M	Right Cheek	26590	17.46	19.00	1.426	0.683	0.974
	LTE Band 25/1RB#0 20M	Right Tilt	26140	17.54	19.00	1.400	0.581	0.813
	LTE Band 25/1RB#0 20M	Right Tilt	26590	17.46	19.00	1.426	0.594	0.847
	LTE Band 25/50RB#0 20M	Right Cheek	26365	16.42	18.00	1.439	0.701	1.009
	LTE Band 25/50RB#0 20M	Right Tilt	26365	16.42	18.00	1.439	0.675	0.971
	LTE Band 25/50RB#0 20M	Left Cheek	26365	16.42	18.00	1.439	0.410	0.590
	LTE Band 25/50RB#0 20M	Left Tilt	26365	16.42	18.00	1.439	0.449	0.646
11#	LTE Band 25/50RB#0 20M	Right Cheek	26140	16.31	18.00	1.476	0.695	1.026
	LTE Band 25/50RB#0 20M	Right Cheek	26590	16.37	18.00	1.455	0.696	1.013
	LTE Band 25/50RB#0 20M	Right Tilt	26140	16.31	18.00	1.476	0.619	0.913
	LTE Band 25/50RB#0 20M	Right Tilt	26590	16.37	18.00	1.455	0.676	0.984
	LTE Band 25/100RB#0 20M	Right Cheek	26365	16.35	18.00	1.462	0.482	0.705
Full Power (ANT 0)								
12#	LTE Band 26/1RB#0 15M	Right Cheek	26865	23.79	25.00	1.321	0.347	0.458
	LTE Band 26/1RB#0 15M	Right Tilt	26865	23.79	25.00	1.321	0.193	0.255
	LTE Band 26/1RB#0 15M	Left Cheek	26865	23.79	25.00	1.321	0.260	0.344
	LTE Band 26/1RB#0 15M	Left Tilt	26865	23.79	25.00	1.321	0.174	0.230
	LTE Band 26/36RB#0 15M	Right Cheek	26865	22.70	24.00	1.349	0.277	0.374
	LTE Band 26/36RB#0 15M	Right Tilt	26865	22.70	24.00	1.349	0.146	0.197
	LTE Band 26/36RB#0 15M	Left Cheek	26865	22.70	24.00	1.349	0.215	0.290
	LTE Band 26/36RB#0 15M	Left Tilt	26865	22.70	24.00	1.349	0.134	0.181



Reduced Power Level 1 (ANT 3)								
	LTE Band 38/1RB#0 20M	Right Cheek	38000	17.16	18.50	1.361	0.491	0.672
13#	LTE Band 38/1RB#0 20M	Right Tilt	38000	17.16	18.50	1.361	0.587	0.804
	LTE Band 38/1RB#0 20M	Left Cheek	38000	17.16	18.50	1.361	0.163	0.223
	LTE Band 38/1RB#0 20M	Left Tilt	38000	17.16	18.50	1.361	0.172	0.236
	LTE Band 38/1RB#0 20M	Right Tilt	37850	17.13	18.50	1.371	0.545	0.752
	LTE Band 38/1RB#0 20M	Right Tilt	38150	17.08	18.50	1.387	0.484	0.675
	LTE Band 38/50RB#0 20M	Right Cheek	38000	16.09	17.50	1.384	0.525	0.731
	LTE Band 38/50RB#0 20M	Right Tilt	38000	16.09	17.50	1.384	0.499	0.695
	LTE Band 38/50RB#0 20M	Left Cheek	38000	16.09	17.50	1.384	0.162	0.225
	LTE Band 38/50RB#0 20M	Left Tilt	38000	16.09	17.50	1.384	0.217	0.302
	LTE Band 38/100RB#0 20M	Right Tilt	38000	16.00	17.50	1.413	0.471	0.669
Reduced Power Level 1 (ANT 3) (HPUE)								
	LTE Band 41/1RB#0 20M	Right Cheek	40620	16.92	18.50	1.439	0.443	0.641
14#	LTE Band 41/1RB#0 20M	Right Tilt	40620	16.92	18.50	1.439	0.499	0.722
	LTE Band 41/1RB#0 20M	Left Cheek	40620	16.92	18.50	1.439	0.144	0.208
	LTE Band 41/1RB#0 20M	Left Tilt	40620	16.92	18.50	1.439	0.152	0.220
	LTE Band 41/50RB#0 20M	Right Cheek	40620	15.95	17.50	1.429	0.453	0.651
	LTE Band 41/50RB#0 20M	Right Tilt	40620	15.95	17.50	1.429	0.468	0.673
	LTE Band 41/50RB#0 20M	Left Cheek	40620	15.95	17.50	1.429	0.138	0.198
	LTE Band 41/50RB#0 20M	Left Tilt	40620	15.95	17.50	1.429	0.159	0.229
Reduced Power Level 1 (ANT 3)								
	LTE Band 41/1RB#0 20M	Right Cheek	40620	13.88	15.50	1.452	0.360	0.526
	LTE Band 41/1RB#0 20M	Right Tilt	40620	13.88	15.50	1.452	0.379	0.554
	LTE Band 41/1RB#0 20M	Left Cheek	40620	13.88	15.50	1.452	0.118	0.172
	LTE Band 41/1RB#0 20M	Left Tilt	40620	13.88	15.50	1.452	0.152	0.222
	LTE Band 41/50RB#0 20M	Right Cheek	40620	12.79	14.50	1.483	0.375	0.559
	LTE Band 41/50RB#0 20M	Right Tilt	40620	12.79	14.50	1.483	0.371	0.553
	LTE Band 41/50RB#0 20M	Left Cheek	40620	12.79	14.50	1.483	0.114	0.170
	LTE Band 41/50RB#0 20M	Left Tilt	40620	12.79	14.50	1.483	0.140	0.209
Reduced Power Level 1 (ANT 3)								
	LTE Band 66/1RB#0 20M	Right Cheek	132322	18.61	20.00	1.377	0.628	0.865
	LTE Band 66/1RB#0 20M	Right Tilt	132322	18.61	20.00	1.377	0.629	0.866
	LTE Band 66/1RB#0 20M	Left Cheek	132322	18.61	20.00	1.377	0.458	0.631
	LTE Band 66/1RB#0 20M	Left Tilt	132322	18.61	20.00	1.377	0.505	0.695
	LTE Band 66/1RB#0 20M	Right Cheek	132072	18.57	20.00	1.390	0.778	1.081



REPORT No.: SZ24060309S01

15#	LTE Band 66/1RB#0 20M	Right Cheek	132572	18.52	20.00	1.406	0.835	1.174
	LTE Band 66/1RB#0 20M	Right Tilt	132072	18.57	20.00	1.390	0.668	0.928
	LTE Band 66/1RB#0 20M	Right Tilt	132572	18.52	20.00	1.406	0.710	0.998
	LTE Band 66/50RB#0 20M	Right Cheek	132322	17.46	19.00	1.426	0.775	1.105
	LTE Band 66/50RB#0 20M	Right Tilt	132322	17.46	19.00	1.426	0.653	0.931
	LTE Band 66/50RB#0 20M	Left Cheek	132322	17.46	19.00	1.426	0.463	0.660
	LTE Band 66/50RB#0 20M	Left Tilt	132322	17.46	19.00	1.426	0.547	0.780
	LTE Band 66/50RB#0 20M	Right Cheek	132072	17.39	19.00	1.449	0.652	0.945
	LTE Band 66/50RB#0 20M	Right Cheek	132572	17.33	19.00	1.469	0.681	1.000
	LTE Band 66/50RB#0 20M	Right Tilt	132072	17.39	19.00	1.449	0.694	1.005
	LTE Band 66/50RB#0 20M	Right Tilt	132572	17.33	19.00	1.469	0.778	1.143
	LTE Band 66/100RB#0 20M	Right Cheek	132322	17.30	19.00	1.479	0.701	1.037
Reduced Power Level 4 for ENDC/CA (ANT 3)								
	LTE Band 66/1RB#0 20M	Right Cheek	132322	15.11	16.50	1.377	0.418	0.576
	LTE Band 66/1RB#0 20M	Right Tilt	132322	15.11	16.50	1.377	0.319	0.439
	LTE Band 66/1RB#0 20M	Left Cheek	132322	15.11	16.50	1.377	0.195	0.269
	LTE Band 66/1RB#0 20M	Left Tilt	132322	15.11	16.50	1.377	0.159	0.220
	LTE Band 66/50RB#0 20M	Right Cheek	132322	14.16	15.50	1.361	0.361	0.491
	LTE Band 66/50RB#0 20M	Right Tilt	132322	14.16	15.50	1.361	0.287	0.391
	LTE Band 66/50RB#0 20M	Left Cheek	132322	14.16	15.50	1.361	0.176	0.239
	LTE Band 66/50RB#0 20M	Left Tilt	132322	14.16	15.50	1.361	0.143	0.195
Reduced Power Level 4 for ENDC (ANT 2)								
	LTE Band 66/1RB#0 20M	Right Cheek	132322	18.78	20.00	1.324	0.443	0.587
	LTE Band 66/1RB#0 20M	Right Tilt	132322	18.78	20.00	1.324	0.110	0.146
	LTE Band 66/1RB#0 20M	Left Cheek	132322	18.78	20.00	1.324	0.240	0.318
	LTE Band 66/1RB#0 20M	Left Tilt	132322	18.78	20.00	1.324	0.071	0.094
	LTE Band 66/50RB#0 20M	Right Cheek	132322	17.63	19.00	1.371	0.246	0.337
	LTE Band 66/50RB#0 20M	Right Tilt	132322	17.63	19.00	1.371	0.059	0.081
	LTE Band 66/50RB#0 20M	Left Cheek	132322	17.63	19.00	1.371	0.130	0.178
	LTE Band 66/50RB#0 20M	Left Tilt	132322	17.63	19.00	1.371	0.038	0.053
Full Power (ANT 0)								
16#	LTE Band 71/1RB#0 20M	Right Cheek	133322	24.05	25.50	1.396	0.337	0.471
	LTE Band 71/1RB#0 20M	Right Tilt	133322	24.05	25.50	1.396	0.161	0.225
	LTE Band 71/1RB#0 20M	Left Cheek	133322	24.05	25.50	1.396	0.309	0.431
	LTE Band 71/1RB#0 20M	Left Tilt	133322	24.05	25.50	1.396	0.199	0.278
	LTE Band 71/50RB#0 20M	Right Cheek	133322	22.99	24.50	1.416	0.268	0.379
	LTE Band 71/50RB#0 20M	Right Tilt	133322	22.99	24.50	1.416	0.129	0.183



REPORT No.: SZ24060309S01

	LTE Band 71/50RB#0 20M	Left Cheek	133322	22.99	24.50	1.416	0.256	0.362
	LTE Band 71/50RB#0 20M	Left Tilt	133322	22.99	24.50	1.416	0.186	0.263

➤ **5G NR DFT-s-QPSK Head SAR**

Plot No.	Band/Mode	Test Position	CH.	Ave. Power (dBm)	Tune-up Limit (dBm)	Tune-up Scaling Factor	Meas. SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
Reduced Power Level 1 (ANT 3)								
	5G NR n2/1RB#1 40M	Right Cheek	378000	15.29	16.50	1.321	0.799	1.056
	5G NR n2/1RB#1 40M	Right Tilt	378000	15.29	16.50	1.321	0.601	0.794
	5G NR n2/1RB#1 40M	Left Cheek	378000	15.29	16.50	1.321	0.447	0.591
	5G NR n2/1RB#1 40M	Left Tilt	378000	15.29	16.50	1.321	0.465	0.614
	5G NR n2/1RB#1 40M	Right Cheek	374000	15.20	16.50	1.349	0.707	0.954
	5G NR n2/1RB#1 40M	Right Cheek	376000	15.24	16.50	1.337	0.740	0.989
17#	5G NR n2/108RB#54 40M	Right Cheek	378000	15.15	16.50	1.365	0.844	1.152
	5G NR n2/108RB#54 40M	Right Tilt	378000	15.15	16.50	1.365	0.662	0.903
	5G NR n2/108RB#54 40M	Left Cheek	378000	15.15	16.50	1.365	0.457	0.624
	5G NR n2/108RB#54 40M	Left Tilt	378000	15.15	16.50	1.365	0.536	0.731
	5G NR n2/108RB#54 40M	Right Cheek	374000	15.10	16.50	1.380	0.833	1.150
	5G NR n2/108RB#54 40M	Right Cheek	376000	15.08	16.50	1.387	0.800	1.109
	5G NR n2/108RB#54 40M	Right Tilt	374000	15.10	16.50	1.380	0.583	0.805
	5G NR n2/108RB#54 40M	Right Tilt	376000	15.08	16.50	1.387	0.605	0.839
	5G NR n2/216RB#0 40M	Right Cheek	378000	14.14	16.50	1.722	0.519	0.894
Reduced Power Level 4 for ENDC (ANT 3)								
	5G NR n2/1RB#1 40M	Right Cheek	378000	13.32	15.00	1.472	0.356	0.524
	5G NR n2/1RB#1 40M	Right Tilt	378000	13.32	15.00	1.472	0.345	0.508
	5G NR n2/1RB#1 40M	Left Cheek	378000	13.32	15.00	1.472	0.124	0.183
	5G NR n2/1RB#1 40M	Left Tilt	378000	13.32	15.00	1.472	0.100	0.147
	5G NR n2/108RB#54 40M	Right Cheek	378000	13.18	14.50	1.355	0.401	0.543
	5G NR n2/108RB#54 40M	Right Tilt	378000	13.18	14.50	1.355	0.360	0.488
	5G NR n2/108RB#54 40M	Left Cheek	378000	13.18	14.50	1.355	0.166	0.225
	5G NR n2/108RB#54 40M	Left Tilt	378000	13.18	14.50	1.355	0.124	0.168
Full Power (ANT 0)								
18#	5G NR n5/1RB#1 20M	Right Cheek	167800	23.86	25.00	1.300	0.347	0.451
	5G NR n5/1RB#1 20M	Right Tilt	167800	23.86	25.00	1.300	0.190	0.247
	5G NR n5/1RB#1 20M	Left Cheek	167800	23.86	25.00	1.300	0.286	0.372
	5G NR n5/1RB#1 20M	Left Tilt	167800	23.86	25.00	1.300	0.207	0.269
	5G NR n5/50RB#25 20M	Right Cheek	167800	23.72	25.00	1.343	0.309	0.415



REPORT No.: SZ24060309S01

	5G NR n5/50RB#25 20M	Right Tilt	167800	23.72	25.00	1.343	0.195	0.262
	5G NR n5/50RB#25 20M	Left Cheek	167800	23.72	25.00	1.343	0.258	0.346
	5G NR n5/50RB#25 20M	Left Tilt	167800	23.72	25.00	1.343	0.158	0.212
Reduced Power Level 1 (ANT 3)								
	5G NR n25/1RB#1 40M	Right Cheek	379000	15.36	16.50	1.300	0.822	1.069
	5G NR n25/1RB#1 40M	Right Tilt	379000	15.36	16.50	1.300	0.710	0.923
	5G NR n25/1RB#1 40M	Left Cheek	379000	15.36	16.50	1.300	0.459	0.597
	5G NR n25/1RB#1 40M	Left Tilt	379000	15.36	16.50	1.300	0.469	0.610
	5G NR n25/1RB#1 40M	Right Cheek	374000	15.22	16.50	1.343	0.729	0.979
	5G NR n25/1RB#1 40M	Right Cheek	376500	15.23	16.50	1.340	0.736	0.986
	5G NR n25/1RB#1 40M	Right Tilt	374000	15.22	16.50	1.343	0.637	0.855
	5G NR n25/1RB#1 40M	Right Tilt	376500	15.23	16.50	1.340	0.702	0.940
	5G NR n25/108RB#54 40M	Right Cheek	379000	15.21	16.50	1.346	0.807	1.086
	5G NR n25/108RB#54 40M	Right Tilt	379000	15.21	16.50	1.346	0.721	0.970
	5G NR n25/108RB#54 40M	Left Cheek	379000	15.21	16.50	1.346	0.486	0.654
	5G NR n25/108RB#54 40M	Left Tilt	379000	15.21	16.50	1.346	0.509	0.685
	5G NR n25/108RB#54 40M	Right Cheek	374000	15.20	16.50	1.349	0.786	1.060
19#	5G NR n25/108RB#54 40M	Right Cheek	376500	15.13	16.50	1.371	0.797	1.093
	5G NR n25/108RB#54 40M	Right Tilt	374000	15.20	16.50	1.349	0.709	0.956
	5G NR n25/108RB#54 40M	Right Tilt	376500	15.13	16.50	1.371	0.707	0.969
	5G NR n25/216RB#0 40M	Right Cheek	379000	14.19	16.50	1.702	0.573	0.975
Reduced Power Level 1 (ANT 3)								
(HPUE)								
	5G NR n41/1RB#136 100M	Right Cheek	518598	15.86	17.00	1.300	0.790	1.027
	5G NR n41/1RB#136 100M	Right Tilt	518598	15.86	17.00	1.300	0.772	1.004
	5G NR n41/1RB#136 100M	Left Cheek	518598	15.86	17.00	1.300	0.231	0.300
	5G NR n41/1RB#136 100M	Left Tilt	518598	15.86	17.00	1.300	0.227	0.296
	5G NR n41/1RB#136 100M	Right Cheek	509202	15.69	17.00	1.352	0.768	1.038
	5G NR n41/1RB#136 100M	Right Cheek	513900	15.50	17.00	1.413	0.619	0.875
20#	5G NR n41/1RB#136 100M	Right Cheek	523296	15.80	17.00	1.318	0.865	1.140
	5G NR n41/1RB#136 100M	Right Cheek	528000	15.53	17.00	1.403	0.702	0.985
	5G NR n41/1RB#136 100M	Right Tilt	509202	15.69	17.00	1.352	0.728	0.984
	5G NR n41/1RB#136 100M	Right Tilt	513900	15.50	17.00	1.413	0.762	1.076
	5G NR n41/1RB#136 100M	Right Tilt	523296	15.80	17.00	1.318	0.785	1.034
	5G NR n41/1RB#136 100M	Right Tilt	528000	15.53	17.00	1.403	0.800	1.122
	5G NR n41/135RB#67 100M	Right Cheek	518598	15.56	17.00	1.393	0.796	1.109
	5G NR n41/135RB#67 100M	Right Tilt	518598	15.56	17.00	1.393	0.673	0.938
	5G NR n41/135RB#67 100M	Left Cheek	518598	15.56	17.00	1.393	0.219	0.305



REPORT No.: SZ24060309S01

	5G NR n41/135RB#67 100M	Left Tilt	518598	15.56	17.00	1.393	0.224	0.312
	5G NR n41/135RB#67 100M	Right Cheek	509202	15.40	17.00	1.445	0.766	1.107
	5G NR n41/135RB#67 100M	Right Cheek	513900	15.50	17.00	1.413	0.795	1.123
	5G NR n41/135RB#67 100M	Right Cheek	523296	15.53	17.00	1.403	0.764	1.072
	5G NR n41/135RB#67 100M	Right Cheek	528000	15.33	17.00	1.469	0.773	1.135
	5G NR n41/135RB#67 100M	Right Tilt	509202	15.40	17.00	1.445	0.684	0.989
	5G NR n41/135RB#67 100M	Right Tilt	513900	15.50	17.00	1.413	0.769	1.086
	5G NR n41/135RB#67 100M	Right Tilt	523296	15.53	17.00	1.403	0.790	1.108
	5G NR n41/135RB#67 100M	Right Tilt	528000	15.33	17.00	1.469	0.697	1.024
	5G NR n41/270RB#0 100M	Right Cheek	518598	14.58	17.00	1.746	0.562	0.981
Reduced Power Level 1 (ANT 3)								
	5G NR n41/1RB#136 100M	Right Cheek	518598	14.86	16.00	1.300	0.820	1.066
	5G NR n41/1RB#136 100M	Right Tilt	518598	14.86	16.00	1.300	0.764	0.993
	5G NR n41/1RB#136 100M	Left Cheek	518598	14.86	16.00	1.300	0.240	0.312
	5G NR n41/1RB#136 100M	Left Tilt	518598	14.86	16.00	1.300	0.269	0.350
	5G NR n41/1RB#136 100M	Right Cheek	509202	14.70	16.00	1.349	0.712	0.960
	5G NR n41/1RB#136 100M	Right Cheek	513900	14.80	16.00	1.318	0.796	1.049
	5G NR n41/1RB#136 100M	Right Cheek	523296	14.74	16.00	1.337	0.809	1.081
	5G NR n41/1RB#136 100M	Right Cheek	528000	14.75	16.00	1.334	0.791	1.055
	5G NR n41/1RB#136 100M	Right Tilt	509202	14.70	16.00	1.349	0.688	0.928
	5G NR n41/1RB#136 100M	Right Tilt	513900	14.80	16.00	1.318	0.779	1.027
	5G NR n41/1RB#136 100M	Right Tilt	523296	14.74	16.00	1.337	0.795	1.063
	5G NR n41/1RB#136 100M	Right Tilt	528000	14.75	16.00	1.334	0.750	1.000
	5G NR n41/135RB#67 100M	Right Cheek	518598	14.12	15.50	1.374	0.754	1.037
	5G NR n41/135RB#67 100M	Right Tilt	518598	14.12	15.50	1.374	0.703	0.966
	5G NR n41/135RB#67 100M	Left Cheek	518598	14.12	15.50	1.374	0.221	0.303
	5G NR n41/135RB#67 100M	Left Tilt	518598	14.12	15.50	1.374	0.247	0.340
	5G NR n41/135RB#67 100M	Right Cheek	509202	13.93	15.50	1.435	0.655	0.940
	5G NR n41/135RB#67 100M	Right Cheek	513900	14.03	15.50	1.403	0.732	1.027
	5G NR n41/135RB#67 100M	Right Cheek	523296	14.04	15.50	1.400	0.744	1.042
	5G NR n41/135RB#67 100M	Right Cheek	528000	14.01	15.50	1.409	0.728	1.026
	5G NR n41/135RB#67 100M	Right Tilt	509202	13.93	15.50	1.435	0.633	0.909
	5G NR n41/135RB#67 100M	Right Tilt	513900	14.03	15.50	1.403	0.717	1.005
	5G NR n41/135RB#67 100M	Right Tilt	523296	14.04	15.50	1.400	0.731	1.024
	5G NR n41/135RB#67 100M	Right Tilt	528000	14.01	15.50	1.409	0.690	0.972
	5G NR n41/270RB#0 100M	Right Cheek	518598	13.11	15.50	1.734	0.526	0.912
Reduced Power Level 4 for ENDC (ANT 3) (HPUE)								



REPORT No.: SZ24060309S01

	5G NR n41/1RB#136 100M	Right Cheek	518598	10.89	12.00	1.291	0.330	0.426
	5G NR n41/1RB#136 100M	Right Tilt	518598	10.89	12.00	1.291	0.284	0.367
	5G NR n41/1RB#136 100M	Left Cheek	518598	10.89	12.00	1.291	0.089	0.115
	5G NR n41/1RB#136 100M	Left Tilt	518598	10.89	12.00	1.291	0.045	0.058
	5G NR n41/135RB#67 100M	Right Cheek	518598	10.59	12.00	1.384	0.329	0.455
	5G NR n41/135RB#67 100M	Right Tilt	518598	10.59	12.00	1.384	0.315	0.436
	5G NR n41/135RB#67 100M	Left Cheek	518598	10.59	12.00	1.384	0.100	0.138
	5G NR n41/135RB#67 100M	Left Tilt	518598	10.59	12.00	1.384	0.046	0.064
Reduced Power Level 4 for ENDC (ANT 3)								
	5G NR n41/1RB#136 100M	Right Cheek	518598	10.86	12.00	1.300	0.295	0.384
	5G NR n41/1RB#136 100M	Right Tilt	518598	10.86	12.00	1.300	0.281	0.365
	5G NR n41/1RB#136 100M	Left Cheek	518598	10.86	12.00	1.300	0.086	0.112
	5G NR n41/1RB#136 100M	Left Tilt	518598	10.86	12.00	1.300	0.040	0.052
	5G NR n41/135RB#67 100M	Right Cheek	518598	10.12	11.50	1.374	0.268	0.368
	5G NR n41/135RB#67 100M	Right Tilt	518598	10.12	11.50	1.374	0.250	0.344
	5G NR n41/135RB#67 100M	Left Cheek	518598	10.12	11.50	1.374	0.078	0.107
	5G NR n41/135RB#67 100M	Left Tilt	518598	10.12	11.50	1.374	0.036	0.049
Reduced Power Level 1 (ANT 3)								
	5G NR n66/1RB#1 40M	Right Cheek	352000	16.89	18.50	1.449	0.755	1.094
21#	5G NR n66/1RB#1 40M	Right Tilt	352000	16.89	18.50	1.449	0.778	1.127
	5G NR n66/1RB#1 40M	Left Cheek	352000	16.89	18.50	1.449	0.419	0.607
	5G NR n66/1RB#1 40M	Left Tilt	352000	16.89	18.50	1.449	0.532	0.771
	5G NR n66/1RB#1 40M	Right Cheek	346000	16.80	18.50	1.479	0.752	1.112
	5G NR n66/1RB#1 40M	Right Cheek	349000	16.84	18.50	1.466	0.724	1.061
	5G NR n66/1RB#1 40M	Right Tilt	346000	16.80	18.50	1.479	0.684	1.012
	5G NR n66/1RB#1 40M	Right Tilt	349000	16.84	18.50	1.466	0.681	0.998
	5G NR n66/108RB#54 40M	Right Cheek	352000	16.69	18.00	1.352	0.827	1.118
	5G NR n66/108RB#54 40M	Right Tilt	352000	16.69	18.00	1.352	0.779	1.053
	5G NR n66/108RB#54 40M	Left Cheek	352000	16.69	18.00	1.352	0.381	0.515
	5G NR n66/108RB#54 40M	Left Tilt	352000	16.69	18.00	1.352	0.453	0.612
	5G NR n66/108RB#54 40M	Right Cheek	346000	16.52	18.00	1.406	0.735	1.033
	5G NR n66/108RB#54 40M	Right Cheek	349000	16.66	18.00	1.361	0.747	1.017
	5G NR n66/108RB#54 40M	Right Tilt	346000	16.52	18.00	1.406	0.594	0.835
	5G NR n66/108RB#54 40M	Right Tilt	349000	16.66	18.00	1.361	0.614	0.836
	5G NR n66/216RB#0 40M	Right Cheek	352000	15.62	18.00	1.730	0.539	0.932
Reduced Power Level 4 for ENDC (ANT 3)								
	5G NR n66/1RB#1 40M	Right Cheek	352000	13.73	15.00	1.340	0.391	0.524
	5G NR n66/1RB#1 40M	Right Tilt	352000	13.73	15.00	1.340	0.393	0.526



REPORT No.: SZ24060309S01

	5G NR n66/1RB#1 40M	Left Cheek	352000	13.73	15.00	1.340	0.173	0.232
	5G NR n66/1RB#1 40M	Left Tilt	352000	13.73	15.00	1.340	0.194	0.260
	5G NR n66/108RB#54 40M	Right Cheek	137600	24.08	25.50	1.387	0.327	0.453
	5G NR n66/108RB#54 40M	Right Tilt	137600	24.08	25.50	1.387	0.153	0.212
	5G NR n66/108RB#54 40M	Left Cheek	137600	24.08	25.50	1.387	0.262	0.363
	5G NR n66/108RB#54 40M	Left Tilt	137600	24.08	25.50	1.387	0.144	0.200
Full Power (ANT 0)								
22#	5G NR n71/1RB#1 20M	Right Cheek	137600	24.08	25.50	1.387	0.327	0.453
	5G NR n71/1RB#1 20M	Right Tilt	137600	24.08	25.50	1.387	0.153	0.212
	5G NR n71/1RB#1 20M	Left Cheek	137600	24.08	25.50	1.387	0.262	0.363
	5G NR n71/1RB#1 20M	Left Tilt	137600	24.08	25.50	1.387	0.144	0.200
	5G NR n71/50RB#25 20M	Right Cheek	137600	23.98	25.00	1.265	0.251	0.317
	5G NR n71/50RB#25 20M	Right Tilt	137600	23.98	25.00	1.265	0.103	0.130
	5G NR n71/50RB#25 20M	Left Cheek	137600	23.98	25.00	1.265	0.214	0.271
	5G NR n71/50RB#25 20M	Left Tilt	137600	23.98	25.00	1.265	0.115	0.145
Reduced Power Level 1 (ANT 4)								
(HPUE)								
	5G NR n77/1RB#1 100M	Right Cheek	633334	15.49	16.50	1.262	0.645	0.814
	5G NR n77/1RB#1 100M	Right Tilt	633334	15.49	16.50	1.262	0.853	1.076
	5G NR n77/1RB#1 100M	Left Cheek	633334	15.49	16.50	1.262	0.874	1.103
23#	5G NR n77/1RB#1 100M	Left Tilt	633334	15.49	16.50	1.262	0.900	1.136
	5G NR n77/135RB#67 100M	Right Cheek	633334	14.83	15.50	1.167	0.528	0.616
	5G NR n77/135RB#67 100M	Right Tilt	633334	14.83	15.50	1.167	0.757	0.883
	5G NR n77/135RB#67 100M	Left Cheek	633334	14.83	15.50	1.167	0.816	0.952
	5G NR n77/135RB#67 100M	Left Tilt	633334	14.83	15.50	1.167	0.904	1.055
	5G NR n77/270RB#0 100M	Left Tilt	633334	13.86	15.50	1.459	0.759	1.107
Reduced Power Level 1 (ANT 4)								
	5G NR n77/1RB#1 100M	Right Cheek	633334	15.55	16.50	1.245	0.516	0.642
	5G NR n77/1RB#1 100M	Right Tilt	633334	15.55	16.50	1.245	0.682	0.849
	5G NR n77/1RB#1 100M	Left Cheek	633334	15.55	16.50	1.245	0.699	0.870
	5G NR n77/1RB#1 100M	Left Tilt	633334	15.55	16.50	1.245	0.711	0.885
	5G NR n77/135RB#67 100M	Right Cheek	633334	14.89	15.50	1.151	0.422	0.486
	5G NR n77/135RB#67 100M	Right Tilt	633334	14.89	15.50	1.151	0.606	0.697
	5G NR n77/135RB#67 100M	Left Cheek	633334	14.89	15.50	1.151	0.623	0.717
	5G NR n77/135RB#67 100M	Left Tilt	633334	14.89	15.50	1.151	0.694	0.799
	5G NR n77/270RB#0 100M	Left Tilt	633334	14.19	15.50	1.352	0.612	0.827
Reduced Power Level 4 for ENDC (ANT 4)								
(HPUE)								



	5G NR n77/1RB#1 100M	Right Cheek	633334	12.05	13.00	1.245	0.383	0.477
	5G NR n77/1RB#1 100M	Right Tilt	633334	12.05	13.00	1.245	0.502	0.625
	5G NR n77/1RB#1 100M	Left Cheek	633334	12.05	13.00	1.245	0.388	0.483
	5G NR n77/1RB#1 100M	Left Tilt	633334	12.05	13.00	1.245	0.418	0.520
	5G NR n77/135RB#67 100M	Right Cheek	633334	11.39	12.50	1.291	0.359	0.464
	5G NR n77/135RB#67 100M	Right Tilt	633334	11.39	12.50	1.291	0.453	0.585
	5G NR n77/135RB#67 100M	Left Cheek	633334	11.39	12.50	1.291	0.362	0.467
	5G NR n77/135RB#67 100M	Left Tilt	633334	11.39	12.50	1.291	0.411	0.531
Reduced Power Level 4 for ENDC (ANT 4)								
	5G NR n77/1RB#1 100M	Right Cheek	633334	12.05	13.50	1.396	0.283	0.395
	5G NR n77/1RB#1 100M	Right Tilt	633334	12.05	13.50	1.396	0.342	0.478
	5G NR n77/1RB#1 100M	Left Cheek	633334	12.05	13.50	1.396	0.261	0.364
	5G NR n77/1RB#1 100M	Left Tilt	633334	12.05	13.50	1.396	0.295	0.412
	5G NR n77/135RB#67 100M	Right Cheek	633334	11.39	13.00	1.449	0.260	0.377
	5G NR n77/135RB#67 100M	Right Tilt	633334	11.39	13.00	1.449	0.315	0.456
	5G NR n77/135RB#67 100M	Left Cheek	633334	11.39	13.00	1.449	0.240	0.348
	5G NR n77/135RB#67 100M	Left Tilt	633334	11.39	13.00	1.449	0.271	0.393
Reduced Power Level 1 (ANT 4) (HPUE)								
	5G NR n77/1RB#136 100M	Right Cheek	662000	14.80	16.00	1.318	0.454	0.598
	5G NR n77/1RB#136 100M	Right Tilt	662000	14.80	16.00	1.318	0.498	0.657
	5G NR n77/1RB#136 100M	Left Cheek	662000	14.80	16.00	1.318	0.617	0.814
	5G NR n77/1RB#136 100M	Left Tilt	662000	14.80	16.00	1.318	0.707	0.932
	5G NR n77/1RB#136 100M	Left Cheek	650000	14.74	16.00	1.337	0.658	0.880
	5G NR n77/1RB#136 100M	Left Cheek	653000	14.78	16.00	1.324	0.677	0.896
	5G NR n77/1RB#136 100M	Left Cheek	656000	14.73	16.00	1.340	0.649	0.870
	5G NR n77/1RB#136 100M	Left Cheek	659000	14.72	16.00	1.343	0.599	0.804
	5G NR n77/1RB#136 100M	Left Tilt	650000	14.74	16.00	1.337	0.575	0.768
	5G NR n77/1RB#136 100M	Left Tilt	653000	14.78	16.00	1.324	0.683	0.904
	5G NR n77/1RB#136 100M	Left Tilt	656000	14.73	16.00	1.340	0.653	0.875
	5G NR n77/1RB#136 100M	Left Tilt	659000	14.72	16.00	1.343	0.720	0.967
	5G NR n77/135RB#67 100M	Right Cheek	662000	14.71	16.00	1.346	0.408	0.549
	5G NR n77/135RB#67 100M	Right Tilt	662000	14.71	16.00	1.346	0.449	0.604
	5G NR n77/135RB#67 100M	Left Cheek	662000	14.71	16.00	1.346	0.555	0.747
	5G NR n77/135RB#67 100M	Left Tilt	662000	14.71	16.00	1.346	0.636	0.856
	5G NR n77/135RB#67 100M	Left Tilt	650000	14.65	16.00	1.365	0.517	0.705
	5G NR n77/135RB#67 100M	Left Tilt	653000	14.69	16.00	1.352	0.614	0.830
	5G NR n77/135RB#67 100M	Left Tilt	656000	14.69	16.00	1.352	0.588	0.795



REPORT No.: SZ24060309S01

	5G NR n77/135RB#67 100M	Left Tilt	659000	14.53	16.00	1.403	0.648	0.909
	5G NR n77/270RB#0 100M	Left Tilt	656000	13.75	16.00	1.679	0.519	0.871
Reduced Power Level 1 (ANT 4)								
	5G NR n77/1RB#1 100M	Right Cheek	656000	15.22	16.50	1.343	0.435	0.584
	5G NR n77/1RB#1 100M	Right Tilt	656000	15.22	16.50	1.343	0.478	0.642
	5G NR n77/1RB#1 100M	Left Cheek	656000	15.22	16.50	1.343	0.598	0.803
	5G NR n77/1RB#1 100M	Left Tilt	656000	15.22	16.50	1.343	0.677	0.909
	5G NR n77/1RB#1 100M	Left Cheek	650000	15.07	16.50	1.390	0.631	0.877
	5G NR n77/1RB#1 100M	Left Cheek	653000	15.14	16.50	1.368	0.648	0.886
	5G NR n77/1RB#1 100M	Left Cheek	662000	15.18	16.50	1.355	0.622	0.843
	5G NR n77/1RB#1 100M	Left Cheek	659000	15.20	16.50	1.349	0.574	0.774
	5G NR n77/1RB#1 100M	Left Tilt	650000	15.07	16.50	1.390	0.550	0.764
	5G NR n77/1RB#1 100M	Left Tilt	653000	15.14	16.50	1.368	0.654	0.894
	5G NR n77/1RB#1 100M	Left Tilt	662000	15.18	16.50	1.355	0.662	0.897
	5G NR n77/1RB#1 100M	Left Tilt	659000	15.20	16.50	1.349	0.626	0.844
	5G NR n77/135RB#67 100M	Right Cheek	656000	14.73	16.00	1.340	0.392	0.525
	5G NR n77/135RB#67 100M	Right Tilt	656000	14.73	16.00	1.340	0.430	0.576
	5G NR n77/135RB#67 100M	Left Cheek	656000	14.73	16.00	1.340	0.580	0.777
	5G NR n77/135RB#67 100M	Left Tilt	656000	14.73	16.00	1.340	0.609	0.816
	5G NR n77/135RB#67 100M	Left Tilt	650000	14.69	16.00	1.352	0.495	0.669
	5G NR n77/135RB#67 100M	Left Tilt	653000	14.73	16.00	1.340	0.589	0.789
	5G NR n77/135RB#67 100M	Left Tilt	662000	14.72	16.00	1.343	0.595	0.799
	5G NR n77/135RB#67 100M	Left Tilt	659000	14.57	16.00	1.390	0.563	0.783
	5G NR n77/270RB#0 100M	Left Tilt	656000	13.79	16.00	1.663	0.563	0.937
Reduced Power Level 4 for ENDC (ANT 4) (HPUE)								
	5G NR n77/1RB#136 100M	Right Cheek	662000	11.34	12.50	1.306	0.319	0.417
	5G NR n77/1RB#136 100M	Right Tilt	662000	11.34	12.50	1.306	0.325	0.425
	5G NR n77/1RB#136 100M	Left Cheek	662000	11.34	12.50	1.306	0.470	0.614
	5G NR n77/1RB#136 100M	Left Tilt	662000	11.34	12.50	1.306	0.484	0.632
	5G NR n77/135RB#67 100M	Right Cheek	662000	11.25	12.50	1.334	0.308	0.411
	5G NR n77/135RB#67 100M	Right Tilt	662000	11.25	12.50	1.334	0.315	0.420
	5G NR n77/135RB#67 100M	Left Cheek	662000	11.25	12.50	1.334	0.452	0.603
	5G NR n77/135RB#67 100M	Left Tilt	662000	11.25	12.50	1.334	0.472	0.629
Reduced Power Level 4 for ENDC (ANT 4)								
	5G NR n77/1RB#136 100M	Right Cheek	656000	11.22	12.50	1.343	0.252	0.338
	5G NR n77/1RB#136 100M	Right Tilt	656000	11.22	12.50	1.343	0.257	0.345
	5G NR n77/1RB#136 100M	Left Cheek	656000	11.22	12.50	1.343	0.372	0.500



	5G NR n77/1RB#136 100M	Left Tilt	656000	11.22	12.50	1.343	0.383	0.514
	5G NR n77/135RB#67 100M	Right Cheek	659000	10.73	12.00	1.340	0.227	0.304
	5G NR n77/135RB#67 100M	Right Tilt	659000	10.73	12.00	1.340	0.231	0.309
	5G NR n77/135RB#67 100M	Left Cheek	659000	10.73	12.00	1.340	0.335	0.449
	5G NR n77/135RB#67 100M	Left Tilt	659000	10.73	12.00	1.340	0.345	0.462

➤ **WLAN Head SAR**

Plot No.	Band/Mode	Test Position	CH.	Ave. Power (dBm)	Tune-up Limit (dBm)	Tune-up Scaling Factor	Meas. SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
Reduced Power Level 1 (ANT 5)								
	WLAN2.4GHz/802.11b	Right Cheek	11	13.94	15.50	1.432	0.066	0.094
	WLAN2.4GHz/802.11b	Right Tilt	11	13.94	15.50	1.432	0.069	0.099
24#	WLAN2.4GHz/802.11b	Left Cheek	11	13.94	15.50	1.432	0.168	0.241
	WLAN2.4GHz/802.11b	Left Tilt	11	13.94	15.50	1.432	0.134	0.192
Reduced Power Level 1 (ANT 5)								
	WLAN5.2GHz/802.11a	Right Cheek	44	12.00	13.50	1.413	0.156	0.227
	WLAN5.2GHz/802.11a	Right Tilt	44	12.00	13.50	1.413	0.190	0.276
	WLAN5.2GHz/802.11a	Left Cheek	44	12.00	13.50	1.413	0.182	0.265
25#	WLAN5.2GHz/802.11a	Left Tilt	44	12.00	13.50	1.413	0.247	0.359
Reduced Power Level 1 (ANT 5)								
	WLAN5.3GHz/802.11a	Right Cheek	52	11.78	13.00	1.324	0.138	0.188
	WLAN5.3GHz/802.11a	Right Tilt	52	11.78	13.00	1.324	0.169	0.230
	WLAN5.3GHz/802.11a	Left Cheek	52	11.78	13.00	1.324	0.172	0.234
26#	WLAN5.3GHz/802.11a	Left Tilt	52	11.78	13.00	1.324	0.215	0.293
Reduced Power Level 1 (ANT 5)								
	WLAN5.5GHz/802.11a	Right Cheek	116	12.35	13.50	1.303	0.189	0.252
27#	WLAN5.5GHz/802.11a	Right Tilt	116	12.35	13.50	1.303	0.217	0.289
	WLAN5.5GHz/802.11a	Left Cheek	116	12.35	13.50	1.303	0.164	0.218
	WLAN5.5GHz/802.11a	Left Tilt	116	12.35	13.50	1.303	0.150	0.200
Reduced Power Level 1 (ANT 5)								
	WLAN5.8GHz/802.11a	Right Cheek	165	11.71	13.00	1.346	0.073	0.101
	WLAN5.8GHz/802.11a	Right Tilt	165	11.71	13.00	1.346	0.050	0.069
	WLAN5.8GHz/802.11a	Left Cheek	165	11.71	13.00	1.346	0.074	0.102
28#	WLAN5.8GHz/802.11a	Left Tilt	165	11.71	13.00	1.346	0.097	0.134

Note:

1. Per KDB 447498 D01v06, for each exposure position, if the highest output power channel Reported SAR ≤ 0.8W/kg, other channels SAR testing is not necessary.
2. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required



when the measured SAR is $\geq 0.8\text{W/kg}$.

3. Per KDB 941225 D05v02r05, 100% RB allocation SAR measurement is not required when the highest reported SAR for 1 RB and 50% RB allocation are $\leq 0.8\text{ W/kg}$.
4. Per KDB 248227 D01v02r02, for 802.11b DSSS, when the reported SAR of the highest measured maximum output power channel for the exposure configuration is $\leq 0.8\text{ W/kg}$, no further SAR testing is required in that exposure configuration.
5. Per KDB 248227 D01v02r02, OFDM SAR is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is $\leq 1.2\text{ W/kg}$.
6. According to KDB 865664 D02v01r02, SAR plot is required for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination.
7. For TDD-LTE, the reported SAR should be scaled with the duty cycle scaling factor 1.006.
8. The 2.4G WLAN reported 1g SAR (W/kg) should be scaled with the duty cycle scaling factor 1.003, WLAN 5.2/5.3/5.8 GHz 802.11a with 1.029 and WLAN 5.5GHz with 1.022.



19.3. Body-worn SAR Data

➤ GSM Body-worn SAR

Plot No.	Band/Mode	Test Position	CH.	Ave. Power (dBm)	Tune-up Limit (dBm)	Tune-up Scaling Factor	Meas. SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
Full Power (ANT 0)								
	GPRS 850(4 TX slots)	Front Side	189	29.55	30.50	1.245	0.315	0.392
29#	GPRS 850(4 TX slots)	Back Side	189	29.55	30.50	1.245	0.444	0.553
Full Power (ANT 3)								
	GPRS 1900(2 TX slots)	Front Side	661	29.45	31.00	1.429	0.319	0.456
30#	GPRS 1900(2 TX slots)	Back Side	661	29.45	31.00	1.429	0.508	0.726

➤ WCDMA Body-worn SAR

Plot No.	Band/Mode	Test Position	CH.	Ave. Power (dBm)	Tune-up Limit (dBm)	Tune-up Scaling Factor	Meas. SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
Full Power (ANT 3)								
	Band II/RMC 12.2Kbps	Front Side	9400	24.32	25.50	1.312	0.365	0.479
31#	Band II/RMC 12.2Kbps	Back Side	9400	24.32	25.50	1.312	0.446	0.585
Full Power (ANT 3)								
	Band IV/RMC 12.2Kbps	Front Side	1413	24.53	25.50	1.250	0.274	0.343
32#	Band IV/RMC 12.2Kbps	Back Side	1413	24.53	25.50	1.250	0.320	0.400
Full Power (ANT 0)								
	Band V/RMC 12.2Kbps	Front Side	4182	24.15	25.50	1.365	0.270	0.368
33#	Band V/RMC 12.2Kbps	Back Side	4182	24.15	25.50	1.365	0.418	0.570

➤ LTE QPSK Body-worn SAR

Plot No.	Band/Mode	Test Position	CH.	Ave. Power (dBm)	Tune-up Limit (dBm)	Tune-up Scaling Factor	Meas. SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
Full Power (ANT 3)								
	LTE Band 2/1RB#0 20M	Front Side	18900	24.03	25.50	1.403	0.295	0.414
	LTE Band 2/1RB#0 20M	Back Side	18900	24.03	25.50	1.403	0.312	0.438
	LTE Band 2/50RB#0 20M	Front Side	18900	22.95	24.50	1.429	0.300	0.429
34#	LTE Band 2/50RB#0 20M	Back Side	18900	22.95	24.50	1.429	0.458	0.654
Reduced Power Level 5 for ENDC (ANT 2)								
	LTE Band 2/1RB#0 20M	Front Side	18900	22.03	23.50	1.403	0.200	0.281
	LTE Band 2/1RB#0 20M	Back Side	18900	22.03	23.50	1.403	0.296	0.415
	LTE Band 2/50RB#0 20M	Front Side	18900	20.95	22.50	1.429	0.257	0.367



	LTE Band 2/50RB#0 20M	Back Side	18900	20.95	22.50	1.429	0.409	0.584
Full Power (ANT 0)								
	LTE Band 5/1RB#0 10M	Front Side	20525	23.69	25.00	1.352	0.181	0.245
35#	LTE Band 5/1RB#0 10M	Back Side	20525	23.69	25.00	1.352	0.312	0.422
	LTE Band 5/25RB#0 10M	Front Side	20525	22.55	24.00	1.396	0.190	0.265
	LTE Band 5/25RB#0 10M	Back Side	20525	22.55	24.00	1.396	0.232	0.324
Full Power (ANT 3)								
	LTE Band 7/1RB#0 20M	Front Side	21100	22.61	24.00	1.377	0.218	0.300
36#	LTE Band 7/1RB#0 20M	Back Side	21100	22.61	24.00	1.377	0.538	0.741
	LTE Band 7/50RB#0 20M	Front Side	21100	21.50	23.00	1.413	0.183	0.258
	LTE Band 7/50RB#0 20M	Back Side	21100	21.50	23.00	1.413	0.506	0.715
Reduced Power Level 5 for ENDC (ANT 2)								
	LTE Band 7/1RB#0 20M	Front Side	21100	21.11	22.50	1.377	0.234	0.322
	LTE Band 7/1RB#0 20M	Back Side	21100	21.11	22.50	1.377	0.343	0.472
	LTE Band 7/50RB#0 20M	Front Side	21100	20.00	21.50	1.413	0.211	0.298
	LTE Band 7/50RB#0 20M	Back Side	21100	20.00	21.50	1.413	0.300	0.424
Full Power (ANT 0)								
	LTE Band 12/1RB#0 10M	Front Side	23095	24.08	25.50	1.387	0.205	0.284
37#	LTE Band 12/1RB#0 10M	Back Side	23095	24.08	25.50	1.387	0.334	0.463
	LTE Band 12/25RB#0 10M	Front Side	23095	22.90	24.50	1.445	0.213	0.308
	LTE Band 12/25RB#0 10M	Back Side	23095	22.90	24.50	1.445	0.256	0.370
Full Power (ANT 0)								
	LTE Band 13/1RB#0 10M	Front Side	23230	24.18	25.50	1.355	0.232	0.314
38#	LTE Band 13/1RB#0 10M	Back Side	23230	24.18	25.50	1.355	0.362	0.491
	LTE Band 13/25RB#0 10M	Front Side	23230	23.17	24.50	1.358	0.233	0.316
	LTE Band 13/25RB#0 10M	Back Side	23230	23.17	24.50	1.358	0.286	0.388
Full Power (ANT 3)								
	LTE Band 25/1RB#0 20M	Front Side	26365	24.08	25.50	1.387	0.307	0.426
39#	LTE Band 25/1RB#0 20M	Back Side	26365	24.08	25.50	1.387	0.410	0.569
	LTE Band 25/50RB#0 20M	Front Side	26365	22.95	24.50	1.429	0.272	0.389
	LTE Band 25/50RB#0 20M	Back Side	26365	22.95	24.50	1.429	0.346	0.494
Full Power (ANT 0)								
	LTE Band 26/1RB#0 15M	Front Side	26865	23.79	25.00	1.321	0.184	0.243
40#	LTE Band 26/1RB#0 15M	Back Side	26865	23.79	25.00	1.321	0.295	0.390
	LTE Band 26/36RB#0 15M	Front Side	26865	22.70	24.00	1.349	0.191	0.258
	LTE Band 26/36RB#0 15M	Back Side	26865	22.70	24.00	1.349	0.234	0.316
Full Power (ANT 3)								
	LTE Band 38/1RB#0 20M	Front Side	38000	23.18	24.50	1.355	0.218	0.297



REPORT No.: SZ24060309S01

41#	LTE Band 38/1RB#0 20M	Back Side	38000	23.18	24.50	1.355	0.234	0.319
	LTE Band 38/50RB#0 20M	Front Side	38000	22.11	23.50	1.377	0.173	0.240
	LTE Band 38/50RB#0 20M	Back Side	38000	22.11	23.50	1.377	0.209	0.290
Full Power (ANT 3) (HPUE)								
	LTE Band 41/1RB#0 20M	Front Side	40620	25.44	27.00	1.432	0.104	0.150
42#	LTE Band 41/1RB#0 20M	Back Side	40620	25.44	27.00	1.432	0.118	0.170
	LTE Band 41/50RB#0 20M	Front Side	40620	24.47	26.00	1.422	0.076	0.109
	LTE Band 41/50RB#0 20M	Back Side	40620	24.47	26.00	1.422	0.083	0.119
Full Power (ANT 3)								
	LTE Band 41/1RB#0 20M	Front Side	40620	22.37	24.00	1.455	0.074	0.108
	LTE Band 41/1RB#0 20M	Back Side	40620	22.37	24.00	1.455	0.099	0.145
	LTE Band 41/50RB#0 20M	Front Side	40620	21.28	23.00	1.486	0.056	0.084
	LTE Band 41/50RB#0 20M	Back Side	40620	21.28	23.00	1.486	0.083	0.124
Full Power (ANT 3)								
	LTE Band 66/1RB#0 20M	Front Side	132322	24.19	25.50	1.352	0.226	0.306
43#	LTE Band 66/1RB#0 20M	Back Side	132322	24.19	25.50	1.352	0.304	0.411
	LTE Band 66/50RB#0 20M	Front Side	132322	23.04	24.50	1.400	0.217	0.304
	LTE Band 66/50RB#0 20M	Back Side	132322	23.04	24.50	1.400	0.277	0.388
Full Power for ENDC (ANT 2)								
	LTE Band 66/1RB#0 20M	Front Side	132322	24.19	25.50	1.352	0.213	0.288
	LTE Band 66/1RB#0 20M	Back Side	132322	24.19	25.50	1.352	0.300	0.406
	LTE Band 66/50RB#0 20M	Front Side	132322	23.04	24.50	1.400	0.196	0.274
	LTE Band 66/50RB#0 20M	Back Side	132322	23.04	24.50	1.400	0.246	0.344
Full Power (ANT 0)								
	LTE Band 71/1RB#0 20M	Front Side	133322	24.05	25.50	1.396	0.306	0.427
44#	LTE Band 71/1RB#0 20M	Back Side	133322	24.05	25.50	1.396	0.345	0.482
	LTE Band 71/50RB#0 20M	Front Side	133322	22.99	24.50	1.416	0.247	0.350
	LTE Band 71/50RB#0 20M	Back Side	133322	22.99	24.50	1.416	0.298	0.422

➤ **5G NR DFT-s-QPSK Body-worn SAR**

Plot No.	Band/Mode	Test Position	CH.	Ave. Power (dBm)	Tune-up Limit (dBm)	Tune-up Scaling Factor	Meas. SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
Full Power (ANT 3)								
	5G NR n2/1RB#1 40M	Front Side	378000	24.32	25.50	1.312	0.441	0.579
	5G NR n2/1RB#1 40M	Back Side	378000	24.32	25.50	1.312	0.620	0.814
	5G NR n2/1RB#1 40M	Back Side	374000	24.23	25.50	1.340	0.605	0.811
45#	5G NR n2/1RB#1 40M	Back Side	376000	24.27	25.50	1.327	0.790	1.049



	5G NR n2/108RB#54 40M	Front Side	378000	24.18	25.50	1.355	0.440	0.596
	5G NR n2/108RB#54 40M	Back Side	378000	24.18	25.50	1.355	0.550	0.745
	5G NR n2/216RB#0 40M	Back Side	378000	23.17	25.50	1.710	0.538	0.920
Reduced Power Level 5 for ENDC (ANT 3)								
	5G NR n2/1RB#1 40M	Front Side	378000	20.82	22.00	1.312	0.260	0.341
	5G NR n2/1RB#1 40M	Back Side	378000	20.82	22.00	1.312	0.421	0.552
	5G NR n2/108RB#54 40M	Front Side	378000	20.68	22.00	1.355	0.267	0.362
	5G NR n2/108RB#54 40M	Back Side	378000	20.68	22.00	1.355	0.427	0.579
Full Power (ANT 0)								
	5G NR n5/1RB#1 20M	Front Side	167800	23.86	25.00	1.300	0.241	0.313
46#	5G NR n5/1RB#1 20M	Back Side	167800	23.86	25.00	1.300	0.318	0.413
	5G NR n5/50RB#25 20M	Front Side	167800	23.72	25.00	1.343	0.216	0.290
	5G NR n5/50RB#25 20M	Back Side	167800	23.72	25.00	1.343	0.287	0.385
Full Power (ANT 3)								
	5G NR n25/1RB#1 40M	Front Side	379000	24.39	25.50	1.291	0.405	0.523
	5G NR n25/1RB#1 40M	Back Side	379000	24.39	25.50	1.291	0.812	1.048
	5G NR n25/1RB#1 40M	Back Side	374000	24.25	25.50	1.334	0.757	1.009
	5G NR n25/1RB#1 40M	Back Side	376500	24.26	25.50	1.330	0.716	0.953
	5G NR n25/108RB#54 40M	Front Side	379000	24.24	25.50	1.337	0.413	0.552
47#	5G NR n25/108RB#54 40M	Back Side	379000	24.24	25.50	1.337	0.826	1.104
	5G NR n25/108RB#54 40M	Back Side	374000	24.23	25.50	1.340	0.740	0.991
	5G NR n25/108RB#54 40M	Back Side	376500	24.16	25.50	1.361	0.756	1.029
	5G NR n25/216RB#0 40M	Back Side	379000	23.22	25.50	1.690	0.600	1.014
Reduced Power Level 2 (ANT 3)								
(HPUE)								
	5G NR n41/1RB#136 100M	Front Side	518598	24.39	25.50	1.291	0.688	0.888
48#	5G NR n41/1RB#136 100M	Back Side	518598	24.39	25.50	1.291	0.745	0.962
	5G NR n41/1RB#136 100M	Front Side	509202	24.22	25.50	1.343	0.709	0.952
	5G NR n41/1RB#136 100M	Front Side	513900	24.19	25.50	1.352	0.665	0.899
	5G NR n41/1RB#136 100M	Front Side	523300	24.33	25.50	1.309	0.632	0.827
	5G NR n41/1RB#136 100M	Front Side	528000	24.26	25.50	1.330	0.625	0.832
	5G NR n41/1RB#136 100M	Back Side	509202	24.22	25.50	1.343	0.713	0.957
	5G NR n41/1RB#136 100M	Back Side	513900	24.19	25.50	1.352	0.653	0.883
	5G NR n41/1RB#136 100M	Back Side	523300	24.33	25.50	1.309	0.692	0.906
	5G NR n41/1RB#136 100M	Back Side	528000	24.26	25.50	1.330	0.628	0.836
	5G NR n41/135RB#67 100M	Front Side	518598	24.09	25.50	1.384	0.644	0.891
	5G NR n41/135RB#67 100M	Back Side	518598	24.09	25.50	1.384	0.624	0.863
	5G NR n41/135RB#67 100M	Front Side	509202	23.93	25.50	1.435	0.653	0.937



	5G NR n41/135RB#67 100M	Front Side	513900	24.03	25.50	1.403	0.612	0.859
	5G NR n41/135RB#67 100M	Front Side	523300	24.06	25.50	1.393	0.602	0.839
	5G NR n41/135RB#67 100M	Front Side	528000	23.96	25.50	1.426	0.522	0.744
	5G NR n41/135RB#67 100M	Back Side	509202	23.93	25.50	1.435	0.665	0.955
	5G NR n41/135RB#67 100M	Back Side	513900	24.03	25.50	1.403	0.673	0.944
	5G NR n41/135RB#67 100M	Back Side	523300	24.06	25.50	1.393	0.566	0.789
	5G NR n41/135RB#67 100M	Back Side	528000	23.96	25.50	1.426	0.468	0.667
	5G NR n41/270RB#0 100M	Back Side	518598	23.11	25.50	1.734	0.511	0.886
Full Power (ANT 3)								
	5G NR n41/1RB#136 100M	Front Side	518598	23.26	24.50	1.330	0.278	0.370
	5G NR n41/1RB#136 100M	Back Side	518598	23.26	24.50	1.330	0.450	0.599
	5G NR n41/135RB#67 100M	Front Side	518598	22.62	23.50	1.225	0.235	0.288
	5G NR n41/135RB#67 100M	Back Side	518598	22.62	23.50	1.225	0.390	0.478
Reduced Power Level 5 for ENDC (ANT 2) (HPUE)								
	5G NR n41/1RB#136 100M	Front Side	518598	20.89	22.00	1.291	0.295	0.381
	5G NR n41/1RB#136 100M	Back Side	518598	20.89	22.00	1.291	0.384	0.496
	5G NR n41/135RB#67 100M	Front Side	518598	20.59	22.00	1.384	0.266	0.368
	5G NR n41/135RB#67 100M	Back Side	518598	20.59	22.00	1.384	0.346	0.479
Full Power (ANT 3)								
	5G NR n66/1RB#1 40M	Front Side	352000	24.43	26.00	1.435	0.337	0.484
49#	5G NR n66/1RB#1 40M	Back Side	352000	24.43	26.00	1.435	0.645	0.926
	5G NR n66/1RB#1 40M	Back Side	346000	24.26	26.00	1.493	0.516	0.770
	5G NR n66/1RB#1 40M	Back Side	349000	24.38	26.00	1.452	0.522	0.758
	5G NR n66/108RB#54 40M	Front Side	352000	24.23	25.50	1.340	0.343	0.460
	5G NR n66/108RB#54 40M	Back Side	352000	24.23	25.50	1.340	0.556	0.745
	5G NR n66/216RB#0 40M	Back Side	352000	23.16	25.50	1.714	0.421	0.722
Reduced Power Level 5 for ENDC (ANT 3)								
	5G NR n66/1RB#1 40M	Front Side	352000	21.93	23.50	1.435	0.260	0.373
	5G NR n66/1RB#1 40M	Back Side	352000	21.93	23.50	1.435	0.418	0.600
	5G NR n66/108RB#54 40M	Front Side	352000	21.73	23.00	1.340	0.269	0.360
	5G NR n66/108RB#54 40M	Back Side	352000	21.73	23.00	1.340	0.411	0.551
Full Power (ANT 0)								
	5G NR n71/1RB#1 20M	Front Side	137600	24.08	25.50	1.387	0.133	0.184
50#	5G NR n71/1RB#1 20M	Back Side	137600	24.08	25.50	1.387	0.190	0.263
	5G NR n71/50RB#25 20M	Front Side	137600	23.98	25.00	1.265	0.103	0.130
	5G NR n71/50RB#25 20M	Back Side	137600	23.98	25.00	1.265	0.159	0.201
Reduced Power Level 4 (ANT 4)								



(HPUE)								
	5G NR n77/1RB#1 100M	Front Side	633334	21.59	23.00	1.384	0.706	0.977
	5G NR n77/1RB#1 100M	Back Side	633334	21.59	23.00	1.384	0.812	1.123
	5G NR n77/135RB#67 100M	Front Side	633334	20.89	22.50	1.449	0.709	1.027
51#	5G NR n77/135RB#67 100M	Back Side	633334	20.89	22.50	1.449	0.809	1.172
	5G NR n77/270RB#0 100M	Back Side	633334	19.92	22.50	1.811	0.600	1.087
Reduced Power Level 5 for ENDC (ANT 4)								
(HPUE)								
	5G NR n77/1RB#1 100M	Front Side	633334	19.05	20.00	1.245	0.438	0.545
	5G NR n77/1RB#1 100M	Back Side	633334	19.05	20.00	1.245	0.456	0.567
	5G NR n77/135RB#67 100M	Front Side	633334	18.39	19.50	1.291	0.394	0.509
	5G NR n77/135RB#67 100M	Back Side	633334	18.39	19.50	1.291	0.410	0.529
Reduced Power Level 2 (ANT 4)								
	5G NR n77/1RB#1 100M	Front Side	633334	21.55	23.00	1.396	0.586	0.818
	5G NR n77/1RB#1 100M	Back Side	633334	21.55	23.00	1.396	0.700	0.977
	5G NR n77/135RB#67 100M	Front Side	633334	20.89	22.00	1.291	0.527	0.681
	5G NR n77/135RB#67 100M	Back Side	633334	20.89	22.00	1.291	0.611	0.789
	5G NR n77/270RB#0 100M	Back Side	633334	20.19	22.00	1.517	0.432	0.655
Reduced Power Level 5 for ENDC (ANT 4)								
	5G NR n77/1RB#1 100M	Front Side	633334	19.05	20.50	1.396	0.333	0.465
	5G NR n77/1RB#1 100M	Back Side	633334	19.05	20.50	1.396	0.364	0.508
	5G NR n77/135RB#67 100M	Front Side	633334	18.39	19.50	1.291	0.301	0.389
	5G NR n77/135RB#67 100M	Back Side	633334	18.39	19.50	1.291	0.318	0.411
Reduced Power Level 2 (ANT 4)								
(HPUE)								
	5G NR n77/1RB#136 100M	Front Side	662000	20.84	22.00	1.306	0.749	0.978
	5G NR n77/1RB#136 100M	Back Side	662000	20.84	22.00	1.306	0.751	0.981
	5G NR n77/1RB#136 100M	Front Side	650000	20.78	22.00	1.324	0.622	0.824
	5G NR n77/1RB#136 100M	Front Side	653000	20.82	22.00	1.312	0.606	0.795
	5G NR n77/1RB#136 100M	Front Side	656000	20.77	22.00	1.327	0.650	0.863
	5G NR n77/1RB#136 100M	Front Side	659000	20.76	22.00	1.330	0.684	0.910
	5G NR n77/1RB#136 100M	Back Side	650000	20.78	22.00	1.324	0.566	0.750
	5G NR n77/1RB#136 100M	Back Side	653000	20.82	22.00	1.312	0.581	0.762
	5G NR n77/1RB#136 100M	Back Side	656000	20.77	22.00	1.327	0.705	0.936
	5G NR n77/1RB#136 100M	Back Side	659000	20.76	22.00	1.330	0.729	0.970
	5G NR n77/135RB#67 100M	Front Side	662000	20.75	22.00	1.334	0.716	0.955
	5G NR n77/135RB#67 100M	Back Side	662000	20.75	22.00	1.334	0.759	1.012
	5G NR n77/135RB#67 100M	Front Side	650000	20.69	22.00	1.352	0.632	0.855



	5G NR n77/135RB#67 100M	Front Side	653000	20.73	22.00	1.340	0.632	0.847
	5G NR n77/135RB#67 100M	Front Side	656000	20.73	22.00	1.340	0.626	0.839
	5G NR n77/135RB#67 100M	Back Side	659000	20.57	22.00	1.390	0.667	0.927
	5G NR n77/135RB#67 100M	Back Side	650000	20.69	22.00	1.352	0.493	0.667
	5G NR n77/135RB#67 100M	Back Side	653000	20.73	22.00	1.340	0.559	0.749
	5G NR n77/135RB#67 100M	Back Side	656000	20.73	22.00	1.340	0.618	0.828
	5G NR n77/135RB#67 100M	Back Side	659000	20.57	22.00	1.390	0.727	1.010
	5G NR n77/270RB#0 100M	Back Side	656000	19.79	22.00	1.663	0.530	0.882
Reduced Power Level 2 (ANT 4)								
	5G NR n77/1RB#1 100M	Front Side	662000	21.22	23.00	1.507	0.524	0.789
	5G NR n77/1RB#1 100M	Back Side	662000	21.22	23.00	1.507	0.584	0.880
	5G NR n77/1RB#1 100M	Back Side	656000	21.07	23.00	1.560	0.500	0.780
	5G NR n77/1RB#1 100M	Back Side	653000	21.14	22.00	1.219	0.512	0.624
	5G NR n77/1RB#1 100M	Back Side	656000	21.18	22.00	1.208	0.535	0.646
	5G NR n77/1RB#1 100M	Back Side	659000	21.20	22.00	1.202	0.571	0.686
	5G NR n77/135RB#67 100M	Front Side	659000	20.73	22.00	1.340	0.522	0.699
	5G NR n77/135RB#67 100M	Back Side	659000	20.73	22.00	1.340	0.562	0.753
	5G NR n77/270RB#0 100M	Back Side	656000	19.79	22.00	1.663	0.462	0.768
Reduced Power Level 5 for ENDC (ANT 4) (HPUE)								
	5G NR n77/1RB#136 100M	Front Side	662000	18.84	20.00	1.306	0.225	0.294
	5G NR n77/1RB#136 100M	Back Side	662000	18.84	20.00	1.306	0.364	0.475
	5G NR n77/135RB#67 100M	Front Side	662000	18.75	20.00	1.334	0.223	0.297
	5G NR n77/135RB#67 100M	Back Side	662000	18.75	20.00	1.334	0.382	0.509
Reduced Power Level 5 for ENDC (ANT 4)								
	5G NR n77/1RB#136 100M	Front Side	656000	18.72	20.00	1.343	0.209	0.281
	5G NR n77/1RB#136 100M	Back Side	656000	18.72	20.00	1.343	0.311	0.418
	5G NR n77/135RB#67 100M	Front Side	656000	18.23	20.00	1.503	0.211	0.317
	5G NR n77/135RB#67 100M	Back Side	656000	18.23	20.00	1.503	0.327	0.492

➤ **WLAN Body-worn SAR**

Plot No.	Band/Mode	Test Position	CH.	Ave. Power (dBm)	Tune-up Limit (dBm)	Tune-up Scaling Factor	Meas. SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
Reduced Power Level 2 (ANT 5)								
	WLAN2.4GHz/802.11b	Front Side	11	18.96	20.50	1.426	0.092	0.132
52#	WLAN2.4GHz/802.11b	Back Side	11	18.96	20.50	1.426	0.151	0.216
Reduced Power Level 2 (ANT 5)								
	WLAN5.2GHz/802.11a	Front Side	44	17.00	18.50	1.413	0.078	0.113
53#	WLAN5.2GHz/802.11a	Back Side	44	17.00	18.50	1.413	0.176	0.256
Reduced Power Level 2 (ANT 5)								
	WLAN5.3GHz/802.11a	Front Side	52	16.78	18.00	1.324	0.082	0.112
54#	WLAN5.3GHz/802.11a	Back Side	52	16.78	18.00	1.324	0.202	0.275
Reduced Power Level 2 (ANT 5)								
	WLAN5.5GHz/802.11a	Front Side	116	17.35	18.50	1.303	0.082	0.109
55#	WLAN5.5GHz/802.11a	Back Side	116	17.35	18.00	1.161	0.146	0.173
Reduced Power Level 2 (ANT 5)								
	WLAN5.8GHz/802.11a	Front Side	165	16.71	18.00	1.346	0.045	0.062
56#	WLAN5.8GHz/802.11a	Back Side	165	16.71	18.00	1.346	0.260	0.360
Full Power (ANT 5)								
	Bluetooth/DH5	Front Side	0	10.67	12.00	1.358	0.020	0.029
57#	Bluetooth/DH5	Back Side	0	10.67	12.00	1.358	0.025	0.037

Note:

1. For TDD-LTE, the reported SAR should be scaled with the duty cycle scaling factor 1.006.
2. The 2.4G WLAN reported 1g SAR (W/kg) should be scaled with the duty cycle scaling factor 1.003, WLAN 5.2/5.3/5.8 GHz 802.11a with 1.029 and WLAN 5.5GHz with 1.022.
3. According to 2016 Oct. TCB workshop for Bluetooth SAR consideration and the theoretical duty cycle is 83.3%, therefore the actual duty cycle will be scaled up to the theoretical value of Bluetooth reported SAR calculation. The duty cycle of Bluetooth is 76.8 %, Therefore the duty cycle scaling factor 1.085 should be used to calculating the reported SAR.



19.4. Hotspot SAR Data

➤ GSM Hotspot SAR

Plot No.	Band/Mode	Test Position	CH.	Ave. Power (dBm)	Tune-up Limit (dBm)	Tune-up Scaling Factor	Meas. SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
Full Power (ANT 0)								
	GPRS 850(4 TX slots)	Front Side	189	29.55	30.50	1.245	0.517	0.643
	GPRS 850(4 TX slots)	Back Side	189	29.55	30.50	1.245	0.819	1.019
	GPRS 850(4 TX slots)	Left Side	189	29.55	30.50	1.245	0.214	0.266
	GPRS 850(4 TX slots)	Right Side	189	29.55	30.50	1.245	0.460	0.572
	GPRS 850(4 TX slots)	Bottom Side	189	29.55	30.50	1.245	0.382	0.475
	GPRS 850(4 TX slots)	Back Side	128	29.52	30.50	1.253	0.786	0.985
58#	GPRS 850(4 TX slots)	Back Side	251	29.57	30.50	1.239	0.925	1.146
Reduced Power Level 3 (ANT 3)								
	GPRS 1900(2 TX slots)	Front Side	661	26.92	28.50	1.439	0.423	0.609
	GPRS 1900(2 TX slots)	Back Side	661	26.92	28.50	1.439	0.707	1.017
	GPRS 1900(2 TX slots)	Left Side	661	26.92	28.50	1.439	0.377	0.542
	GPRS 1900(2 TX slots)	Top Side	661	26.92	28.50	1.439	0.281	0.404
	GPRS 1900(2 TX slots)	Back Side	512	26.88	28.50	1.452	0.731	1.061
59#	GPRS 1900(2 TX slots)	Back Side	810	26.90	28.50	1.445	0.776	1.122

➤ WCDMA Hotspot SAR

Plot No.	Band/Mode	Test Position	CH.	Ave. Power (dBm)	Tune-up Limit (dBm)	Tune-up Scaling Factor	Meas. SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
Reduced Power Level 3 (ANT 3)								
	Band II/RMC 12.2Kbps	Front Side	9400	20.80	22.00	1.318	0.436	0.575
	Band II/RMC 12.2Kbps	Back Side	9400	20.80	22.00	1.318	0.619	0.816
	Band II/RMC 12.2Kbps	Left Side	9400	20.80	22.00	1.318	0.226	0.298
	Band II/RMC 12.2Kbps	Top Side	9400	20.80	22.00	1.318	0.313	0.413
60#	Band II/RMC 12.2Kbps	Back Side	9262	20.77	22.00	1.327	0.642	0.852
	Band II/RMC 12.2Kbps	Back Side	9538	20.79	22.00	1.321	0.576	0.761
Reduced Power Level 3 (ANT 3)								
	Band IV/RMC 12.2Kbps	Front Side	1413	23.00	24.50	1.413	0.481	0.679
	Band IV/RMC 12.2Kbps	Back Side	1413	23.00	24.50	1.413	0.655	0.925
	Band IV/RMC 12.2Kbps	Left Side	1413	23.00	24.50	1.413	0.314	0.444
	Band IV/RMC 12.2Kbps	Top Side	1413	23.00	24.50	1.413	0.547	0.773
	Band IV/RMC 12.2Kbps	Back Side	1312	22.95	24.50	1.429	0.610	0.872



REPORT No.: SZ24060309S01

61#	Band IV/RMC 12.2Kbps	Back Side	1513	22.97	24.50	1.422	0.660	0.939
Full Power (ANT 0)								
	Band V/RMC 12.2Kbps	Front Side	4182	24.15	25.50	1.365	0.430	0.587
	Band V/RMC 12.2Kbps	Back Side	4182	24.15	25.50	1.365	0.698	0.952
	Band V/RMC 12.2Kbps	Left Side	4182	24.15	25.50	1.365	0.182	0.248
	Band V/RMC 12.2Kbps	Right Side	4182	24.15	25.50	1.365	0.407	0.555
	Band V/RMC 12.2Kbps	Bottom Side	4182	24.15	25.50	1.365	0.538	0.734
62#	Band V/RMC 12.2Kbps	Back Side	4132	24.10	25.50	1.380	0.832	1.148
	Band V/RMC 12.2Kbps	Back Side	4233	24.09	25.50	1.384	0.711	0.984

➤ **LTE QPSK Hotspot SAR**

Plot No.	Band/Mode	Test Position	CH.	Ave. Power (dBm)	Tune-up Limit (dBm)	Tune-up Scaling Factor	Meas. SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
Reduced Power Level 3 (ANT 3)								
	LTE Band 2/1RB#0 20M	Front Side	18900	21.67	23.00	1.358	0.493	0.670
	LTE Band 2/1RB#0 20M	Back Side	18900	21.67	23.00	1.358	0.656	0.891
	LTE Band 2/1RB#0 20M	Left Side	18900	21.67	23.00	1.358	0.417	0.566
	LTE Band 2/1RB#0 20M	Top Side	18900	21.67	23.00	1.358	0.448	0.609
	LTE Band 2/1RB#0 20M	Back Side	18700	21.62	23.00	1.374	0.744	1.022
63#	LTE Band 2/1RB#0 20M	Back Side	19100	21.65	23.00	1.365	0.846	1.154
	LTE Band 2/50RB#0 20M	Front Side	18900	20.74	22.00	1.337	0.489	0.654
	LTE Band 2/50RB#0 20M	Back Side	18900	20.74	22.00	1.337	0.708	0.946
	LTE Band 2/50RB#0 20M	Left Side	18900	20.74	22.00	1.337	0.390	0.521
	LTE Band 2/50RB#0 20M	Top Side	18900	20.74	22.00	1.337	0.388	0.519
	LTE Band 2/50RB#0 20M	Back Side	18700	20.74	22.00	1.337	0.828	1.107
	LTE Band 2/50RB#0 20M	Back Side	19100	20.69	22.00	1.352	0.712	0.963
	LTE Band 2/100RB#0 20M	Back Side	18900	20.56	22.00	1.393	0.638	0.889
Reduced Power Level 6 for ENDC (ANT 2)								
	LTE Band 2/1RB#0 20M	Front Side	18900	20.03	21.50	1.403	0.186	0.261
	LTE Band 2/1RB#0 20M	Back Side	18900	20.03	21.50	1.403	0.376	0.527
	LTE Band 2/1RB#0 20M	Left Side	18900	20.03	21.50	1.403	0.367	0.515
	LTE Band 2/1RB#0 20M	Top Side	18900	20.03	21.50	1.403	0.085	0.119
	LTE Band 2/50RB#0 20M	Front Side	18900	18.95	20.50	1.429	0.111	0.159
	LTE Band 2/50RB#0 20M	Back Side	18900	18.95	20.50	1.429	0.203	0.290
	LTE Band 2/50RB#0 20M	Left Side	18900	18.95	20.50	1.429	0.173	0.247
	LTE Band 2/50RB#0 20M	Top Side	18900	18.95	20.50	1.429	0.058	0.083
Full Power (ANT 0)								
	LTE Band 5/1RB#0 10M	Front Side	20525	23.69	25.00	1.352	0.467	0.631



REPORT No.: SZ24060309S01

	LTE Band 5/1RB#0 10M	Back Side	20525	23.69	25.00	1.352	0.755	1.021
	LTE Band 5/1RB#0 10M	Left Side	20525	23.69	25.00	1.352	0.160	0.216
	LTE Band 5/1RB#0 10M	Right Side	20525	23.69	25.00	1.352	0.302	0.408
	LTE Band 5/1RB#0 10M	Bottom Side	20525	23.69	25.00	1.352	0.421	0.569
64#	LTE Band 5/1RB#0 10M	Back Side	20450	23.61	25.00	1.377	0.775	1.067
	LTE Band 5/1RB#0 10M	Back Side	20600	23.66	25.00	1.361	0.781	1.063
	LTE Band 5/25RB#0 10M	Front Side	20525	22.55	24.00	1.396	0.386	0.539
	LTE Band 5/25RB#0 10M	Back Side	20525	22.55	24.00	1.396	0.572	0.799
	LTE Band 5/25RB#0 10M	Left Side	20525	22.55	24.00	1.396	0.109	0.152
	LTE Band 5/25RB#0 10M	Right Side	20525	22.55	24.00	1.396	0.250	0.349
	LTE Band 5/25RB#0 10M	Bottom Side	20525	22.55	24.00	1.396	0.381	0.532
	LTE Band 5/50RB#0 10M	Back Side	20525	22.32	24.00	1.472	0.548	0.807
Reduced Power Level 6 for ENDC/CA (ANT 0)								
	LTE Band 5/1RB#0 10M	Front Side	20525	20.19	21.50	1.352	0.215	0.291
	LTE Band 5/1RB#0 10M	Back Side	20525	20.19	21.50	1.352	0.327	0.442
	LTE Band 5/1RB#0 10M	Left Side	20525	20.19	21.50	1.352	0.082	0.111
	LTE Band 5/1RB#0 10M	Right Side	20525	20.19	21.50	1.352	0.172	0.233
	LTE Band 5/1RB#0 10M	Bottom Side	20525	20.19	21.50	1.352	0.211	0.285
	LTE Band 5/25RB#0 10M	Front Side	20525	19.05	20.50	1.396	0.212	0.296
	LTE Band 5/25RB#0 10M	Back Side	20525	19.05	20.50	1.396	0.315	0.440
	LTE Band 5/25RB#0 10M	Left Side	20525	19.05	20.50	1.396	0.093	0.130
	LTE Band 5/25RB#0 10M	Right Side	20525	19.05	20.50	1.396	0.155	0.216
	LTE Band 5/25RB#0 10M	Bottom Side	20525	19.05	20.50	1.396	0.200	0.279
Reduced Power Level 3 (ANT 3)								
	LTE Band 7/1RB#0 20M	Front Side	21100	18.59	20.00	1.384	0.431	0.596
	LTE Band 7/1RB#0 20M	Back Side	21100	18.59	20.00	1.384	0.769	1.064
	LTE Band 7/1RB#0 20M	Left Side	21100	18.59	20.00	1.384	0.468	0.648
	LTE Band 7/1RB#0 20M	Top Side	21100	18.59	20.00	1.384	0.426	0.589
	LTE Band 7/1RB#0 20M	Back Side	20850	18.50	20.00	1.413	0.713	1.007
65#	LTE Band 7/1RB#0 20M	Back Side	21350	18.51	20.00	1.409	0.799	1.126
	LTE Band 7/50RB#0 20M	Front Side	21100	17.48	19.00	1.419	0.421	0.597
	LTE Band 7/50RB#0 20M	Back Side	21100	17.48	19.00	1.419	0.756	1.073
	LTE Band 7/50RB#0 20M	Left Side	21100	17.48	19.00	1.419	0.406	0.576
	LTE Band 7/50RB#0 20M	Top Side	21100	17.48	19.00	1.419	0.392	0.556
	LTE Band 7/50RB#0 20M	Back Side	20850	17.43	19.00	1.435	0.739	1.061
	LTE Band 7/50RB#0 20M	Back Side	21350	17.33	19.00	1.469	0.751	1.103
	LTE Band 7/100RB#0 20M	Back Side	21100	17.37	19.00	1.455	0.534	0.777
Reduced Power Level 6 for ENDC (ANT 2)								



	LTE Band 7/1RB#0 10M	Front Side	21100	20.11	21.50	1.377	0.239	0.329
	LTE Band 7/1RB#0 10M	Back Side	21100	20.11	21.50	1.377	0.385	0.530
	LTE Band 7/1RB#0 10M	Left Side	21100	20.11	21.50	1.377	0.255	0.351
	LTE Band 7/1RB#0 10M	Top Side	21100	20.11	21.50	1.377	0.057	0.079
	LTE Band 7/50RB#0 10M	Front Side	21100	19.00	20.50	1.413	0.148	0.209
	LTE Band 7/50RB#0 10M	Back Side	21100	19.00	20.50	1.413	0.230	0.325
	LTE Band 7/50RB#0 10M	Left Side	21100	19.00	20.50	1.413	0.159	0.225
	LTE Band 7/50RB#0 10M	Top Side	21100	19.00	20.50	1.413	0.033	0.047
Full Power (ANT 0)								
	LTE Band 12/1RB#0 10M	Front Side	23095	24.08	25.50	1.387	0.260	0.361
66#	LTE Band 12/1RB#0 10M	Back Side	23095	24.08	25.50	1.387	0.429	0.595
	LTE Band 12/1RB#0 10M	Left Side	23095	24.08	25.50	1.387	0.198	0.275
	LTE Band 12/1RB#0 10M	Right Side	23095	24.08	25.50	1.387	0.405	0.562
	LTE Band 12/1RB#0 10M	Bottom Side	23095	24.08	25.50	1.387	0.285	0.395
	LTE Band 12/25RB#0 10M	Front Side	23095	22.90	24.50	1.445	0.211	0.305
	LTE Band 12/25RB#0 10M	Back Side	23095	22.90	24.50	1.445	0.294	0.425
	LTE Band 12/25RB#0 10M	Left Side	23095	22.90	24.50	1.445	0.144	0.208
	LTE Band 12/25RB#0 10M	Right Side	23095	22.90	24.50	1.445	0.248	0.358
	LTE Band 12/25RB#0 10M	Bottom Side	23095	22.90	24.50	1.445	0.236	0.341
Full Power (ANT 0)								
	LTE Band 13/1RB#0 10M	Front Side	23230	24.18	25.50	1.355	0.335	0.454
67#	LTE Band 13/1RB#0 10M	Back Side	23230	24.18	25.50	1.355	0.623	0.844
	LTE Band 13/1RB#0 10M	Left Side	23230	24.18	25.50	1.355	0.169	0.229
	LTE Band 13/1RB#0 10M	Right Side	23230	24.18	25.50	1.355	0.413	0.560
	LTE Band 13/1RB#0 10M	Bottom Side	23230	24.18	25.50	1.355	0.329	0.446
	LTE Band 13/25RB#0 10M	Front Side	23230	23.17	24.50	1.358	0.266	0.361
	LTE Band 13/25RB#0 10M	Back Side	23230	23.17	24.50	1.358	0.403	0.547
	LTE Band 13/25RB#0 10M	Left Side	23230	23.17	24.50	1.358	0.137	0.186
	LTE Band 13/25RB#0 10M	Right Side	23230	23.17	24.50	1.358	0.363	0.493
	LTE Band 13/25RB#0 10M	Bottom Side	23230	23.17	24.50	1.358	0.286	0.388
	LTE Band 13/50RB#0 10M	Back Side	23230	23.09	24.50	1.384	0.406	0.562
Reduced Power Level 6 for ENDC (ANT 0)								
	LTE Band 13/1RB#0 10M	Front Side	23230	22.18	23.50	1.355	0.219	0.297
	LTE Band 13/1RB#0 10M	Back Side	23230	22.18	23.50	1.355	0.318	0.431
	LTE Band 13/1RB#0 10M	Left Side	23230	22.18	23.50	1.355	0.103	0.140
	LTE Band 13/1RB#0 10M	Right Side	23230	22.18	23.50	1.355	0.156	0.211
	LTE Band 13/1RB#0 10M	Bottom Side	23230	22.18	23.50	1.355	0.222	0.301
	LTE Band 13/25RB#0 10M	Front Side	23230	21.17	22.50	1.358	0.225	0.306



	LTE Band 13/25RB#0 10M	Back Side	23230	21.17	22.50	1.358	0.340	0.462
	LTE Band 13/25RB#0 10M	Left Side	23230	21.17	22.50	1.358	0.099	0.134
	LTE Band 13/25RB#0 10M	Right Side	23230	21.17	22.50	1.358	0.138	0.187
	LTE Band 13/25RB#0 10M	Bottom Side	23230	21.17	22.50	1.358	0.235	0.319
Reduced Power Level 3 (ANT 3)								
	LTE Band 25/1RB#0 20M	Front Side	26365	21.63	23.00	1.371	0.558	0.765
	LTE Band 25/1RB#0 20M	Back Side	26365	21.63	23.00	1.371	0.643	0.881
	LTE Band 25/1RB#0 20M	Left Side	26365	21.63	23.00	1.371	0.482	0.661
	LTE Band 25/1RB#0 20M	Top Side	26365	21.63	23.00	1.371	0.395	0.541
	LTE Band 25/1RB#0 20M	Back Side	26140	21.62	23.00	1.374	0.631	0.867
	LTE Band 25/1RB#0 20M	Back Side	26590	21.54	23.00	1.400	0.629	0.880
	LTE Band 25/50RB#0 20M	Front Side	26365	20.50	22.00	1.413	0.604	0.853
	LTE Band 25/50RB#0 20M	Back Side	26365	20.50	22.00	1.413	0.713	1.007
	LTE Band 25/50RB#0 20M	Left Side	26365	20.50	22.00	1.413	0.552	0.780
	LTE Band 25/50RB#0 20M	Top Side	26365	20.50	22.00	1.413	0.395	0.558
	LTE Band 25/50RB#0 20M	Front Side	26140	20.39	22.00	1.449	0.618	0.895
	LTE Band 25/50RB#0 20M	Front Side	26590	20.45	22.00	1.429	0.635	0.907
68#	LTE Band 25/50RB#0 20M	Back Side	26140	20.39	22.00	1.449	0.794	1.150
	LTE Band 25/50RB#0 20M	Back Side	26590	20.45	22.00	1.429	0.779	1.113
	LTE Band 25/100RB#0 20M	Back Side	26365	20.43	22.00	1.435	0.538	0.772
Full Power (ANT 0)								
	LTE Band 26/1RB#0 15M	Front Side	26865	23.79	25.00	1.321	0.349	0.461
69#	LTE Band 26/1RB#0 15M	Back Side	26865	23.79	25.00	1.321	0.752	0.994
	LTE Band 26/1RB#0 15M	Left Side	26865	23.79	25.00	1.321	0.169	0.223
	LTE Band 26/1RB#0 15M	Right Side	26865	23.79	25.00	1.321	0.339	0.448
	LTE Band 26/1RB#0 15M	Bottom Side	26865	23.79	25.00	1.321	0.311	0.411
	LTE Band 26/1RB#0 15M	Back Side	26765	23.68	25.00	1.355	0.686	0.930
	LTE Band 26/1RB#0 15M	Back Side	26965	23.76	25.00	1.330	0.741	0.986
	LTE Band 26/36RB#0 15M	Front Side	26865	22.70	24.00	1.349	0.281	0.379
	LTE Band 26/36RB#0 15M	Back Side	26865	22.70	24.00	1.349	0.582	0.785
	LTE Band 26/36RB#0 15M	Left Side	26865	22.70	24.00	1.349	0.125	0.169
	LTE Band 26/36RB#0 15M	Right Side	26865	22.70	24.00	1.349	0.257	0.347
	LTE Band 26/36RB#0 15M	Bottom Side	26865	22.70	24.00	1.349	0.301	0.406
	LTE Band 26/75RB#0 15M	Back Side	26865	22.53	24.00	1.403	0.537	0.753
Reduced Power Level 6 for ENDC (ANT 0)								
	LTE Band 26/1RB#0 15M	Front Side	26865	20.79	22.00	1.321	0.222	0.293
	LTE Band 26/1RB#0 15M	Back Side	26865	20.79	22.00	1.321	0.342	0.452



REPORT No.: SZ24060309S01

	LTE Band 26/1RB#0 15M	Left Side	26865	20.79	22.00	1.321	0.095	0.126
	LTE Band 26/1RB#0 15M	Right Side	26865	20.79	22.00	1.321	0.135	0.178
	LTE Band 26/1RB#0 15M	Bottom Side	26865	20.79	22.00	1.321	0.208	0.275
	LTE Band 26/36RB#0 15M	Front Side	26865	19.70	21.00	1.349	0.249	0.336
	LTE Band 26/36RB#0 15M	Back Side	26865	19.70	21.00	1.349	0.375	0.506
	LTE Band 26/36RB#0 15M	Left Side	26865	19.70	21.00	1.349	0.098	0.132
	LTE Band 26/36RB#0 15M	Right Side	26865	19.70	21.00	1.349	0.112	0.151
	LTE Band 26/36RB#0 15M	Bottom Side	26865	19.70	21.00	1.349	0.213	0.287
Reduced Power Level 3 (ANT 3)								
	LTE Band 38/1RB#0 20M	Front Side	38000	21.21	22.50	1.346	0.320	0.433
70#	LTE Band 38/1RB#0 20M	Back Side	38000	21.21	22.50	1.346	0.522	0.707
	LTE Band 38/1RB#0 20M	Left Side	38000	21.21	22.50	1.346	0.419	0.567
	LTE Band 38/1RB#0 20M	Top Side	38000	21.21	22.50	1.346	0.325	0.440
	LTE Band 38/50RB#0 20M	Front Side	38000	20.14	21.50	1.368	0.314	0.432
	LTE Band 38/50RB#0 20M	Back Side	38000	20.14	21.50	1.368	0.495	0.681
	LTE Band 38/50RB#0 20M	Left Side	38000	20.14	21.50	1.368	0.400	0.550
	LTE Band 38/50RB#0 20M	Top Side	38000	20.14	21.50	1.368	0.302	0.416
Reduced Power Level 3 (ANT 3) (HPUE)								
	LTE Band 41/1RB#0 20M	Front Side	40620	19.91	21.50	1.442	0.139	0.201
	LTE Band 41/1RB#0 20M	Back Side	40620	19.91	21.50	1.442	0.187	0.271
	LTE Band 41/1RB#0 20M	Left Side	40620	19.91	21.50	1.442	0.147	0.214
	LTE Band 41/1RB#0 20M	Top Side	40620	19.91	21.50	1.442	0.146	0.212
	LTE Band 41/50RB#0 20M	Front Side	40620	18.94	20.50	1.432	0.140	0.202
	LTE Band 41/50RB#0 20M	Back Side	40620	18.94	20.50	1.432	0.175	0.252
	LTE Band 41/50RB#0 20M	Left Side	40620	18.94	20.50	1.432	0.147	0.212
	LTE Band 41/50RB#0 20M	Top Side	40620	18.94	20.50	1.432	0.100	0.145
Reduced Power Level 3 (ANT 3)								
	LTE Band 41/1RB#0 20M	Front Side	40620	16.89	18.50	1.449	0.148	0.216
71#	LTE Band 41/1RB#0 20M	Back Side	40620	16.89	18.50	1.449	0.260	0.379
	LTE Band 41/1RB#0 20M	Left Side	40620	16.89	18.50	1.449	0.161	0.235
	LTE Band 41/1RB#0 20M	Top Side	40620	16.89	18.50	1.449	0.237	0.345
	LTE Band 41/50RB#0 20M	Front Side	40620	15.80	17.50	1.479	0.139	0.207
	LTE Band 41/50RB#0 20M	Back Side	40620	15.80	17.50	1.479	0.252	0.375
	LTE Band 41/50RB#0 20M	Left Side	40620	15.80	17.50	1.479	0.164	0.244
	LTE Band 41/50RB#0 20M	Top Side	40620	15.80	17.50	1.479	0.238	0.354
Reduced Power Level 3 (ANT 3)								
	LTE Band 66/1RB#0 20M	Front Side	132322	21.77	23.00	1.327	0.450	0.597



	LTE Band 66/1RB#0 20M	Back Side	132322	21.77	23.00	1.327	0.626	0.831
	LTE Band 66/1RB#0 20M	Left Side	132322	21.77	23.00	1.327	0.274	0.364
	LTE Band 66/1RB#0 20M	Top Side	132322	21.77	23.00	1.327	0.250	0.332
	LTE Band 66/1RB#0 20M	Back Side	132072	21.73	23.00	1.340	0.352	0.472
	LTE Band 66/1RB#0 20M	Back Side	132572	21.68	23.00	1.355	0.601	0.814
	LTE Band 66/50RB#0 20M	Front Side	132322	20.62	22.00	1.374	0.356	0.489
72#	LTE Band 66/50RB#0 20M	Back Side	132322	20.62	22.00	1.374	0.637	0.875
	LTE Band 66/50RB#0 20M	Left Side	132322	20.62	22.00	1.374	0.317	0.436
	LTE Band 66/50RB#0 20M	Top Side	132322	20.62	22.00	1.374	0.301	0.414
	LTE Band 66/50RB#0 20M	Back Side	132072	20.55	22.00	1.396	0.409	0.571
	LTE Band 66/50RB#0 20M	Back Side	132572	20.49	22.00	1.416	0.521	0.738
	LTE Band 66/100RB#0 20M	Back Side	132572	20.48	22.00	1.419	0.435	0.617
Reduced Power Level 6 for ENDC/CA (ANT 3)								
	LTE Band 66/1RB#0 20M	Front Side	132322	19.19	20.50	1.352	0.139	0.188
	LTE Band 66/1RB#0 20M	Back Side	132322	19.19	20.50	1.352	0.344	0.465
	LTE Band 66/1RB#0 20M	Left Side	132322	19.19	20.50	1.352	0.097	0.131
	LTE Band 66/1RB#0 20M	Top Side	132322	19.19	20.50	1.352	0.090	0.122
	LTE Band 66/50RB#0 20M	Front Side	132322	18.15	19.50	1.365	0.114	0.156
	LTE Band 66/50RB#0 20M	Back Side	132322	18.15	19.50	1.365	0.282	0.385
	LTE Band 66/50RB#0 20M	Left Side	132322	18.15	19.50	1.365	0.080	0.109
	LTE Band 66/50RB#0 20M	Top Side	132322	18.15	19.50	1.365	0.074	0.101
Reduced Power Level 6 for ENDC (ANT 2)								
	LTE Band 66/1RB#0 20M	Front Side	132322	24.19	25.50	1.352	0.104	0.141
	LTE Band 66/1RB#0 20M	Back Side	132322	24.19	25.50	1.352	0.271	0.366
	LTE Band 66/1RB#0 20M	Left Side	132322	24.19	25.50	1.352	0.205	0.277
	LTE Band 66/1RB#0 20M	Top Side	132322	24.19	25.50	1.352	0.052	0.070
	LTE Band 66/50RB#0 20M	Front Side	132322	23.04	24.50	1.400	0.050	0.070
	LTE Band 66/50RB#0 20M	Back Side	132322	23.04	24.50	1.400	0.114	0.160
	LTE Band 66/50RB#0 20M	Left Side	132322	23.04	24.50	1.400	0.102	0.143
	LTE Band 66/50RB#0 20M	Top Side	132322	23.04	24.50	1.400	0.032	0.045
Full Power (ANT 0)								
	LTE Band 71/1RB#0 20M	Front Side	133322	24.05	25.50	1.396	0.312	0.436
	LTE Band 71/1RB#0 20M	Back Side	133322	24.05	25.50	1.396	0.392	0.547
	LTE Band 71/1RB#0 20M	Left Side	133322	24.05	25.50	1.396	0.273	0.381
73#	LTE Band 71/1RB#0 20M	Right Side	133322	24.05	25.50	1.396	0.476	0.665
	LTE Band 71/1RB#0 20M	Bottom Side	133322	24.05	25.50	1.396	0.314	0.438
	LTE Band 71/50RB#0 20M	Front Side	133322	22.99	24.50	1.416	0.236	0.334



REPORT No.: SZ24060309S01

	LTE Band 71/50RB#0 20M	Back Side	133322	22.99	24.50	1.416	0.305	0.432
	LTE Band 71/50RB#0 20M	Left Side	133322	22.99	24.50	1.416	0.213	0.302
	LTE Band 71/50RB#0 20M	Right Side	133322	22.99	24.50	1.416	0.410	0.580
	LTE Band 71/50RB#0 20M	Bottom Side	133322	22.99	24.50	1.416	0.248	0.351

➤ **5G NR DFT-s-QPSK Hotspot SAR**

Plot No.	Band/Mode	Test Position	CH.	Ave. Power (dBm)	Tune-up Limit (dBm)	Tune-up Scaling Factor	Meas. SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
Reduced Power Level 3 (ANT 3)								
	5G NR n2/1RB#1 40M	Front Side	378000	19.79	21.00	1.321	0.471	0.622
	5G NR n2/1RB#1 40M	Back Side	378000	19.79	21.00	1.321	0.782	1.033
	5G NR n2/1RB#1 40M	Left Side	378000	19.79	21.00	1.321	0.442	0.584
	5G NR n2/1RB#1 40M	Top Side	378000	19.79	21.00	1.321	0.317	0.419
	5G NR n2/1RB#1 40M	Back Side	374000	19.70	21.00	1.349	0.799	1.078
74#	5G NR n2/1RB#1 40M	Back Side	376000	19.74	21.00	1.337	0.810	1.083
	5G NR n2/108RB#54 40M	Front Side	378000	19.65	21.00	1.365	0.442	0.602
	5G NR n2/108RB#54 40M	Back Side	378000	19.65	21.00	1.365	0.731	0.997
	5G NR n2/108RB#54 40M	Left Side	378000	19.65	21.00	1.365	0.437	0.597
	5G NR n2/108RB#54 40M	Top Side	378000	19.65	21.00	1.365	0.338	0.462
	5G NR n2/108RB#54 40M	Back Side	374000	19.60	21.00	1.380	0.656	0.906
	5G NR n2/108RB#54 40M	Back Side	376000	19.58	21.00	1.387	0.708	0.982
	5G NR n2/216RB#0 40M	Back Side	378000	18.64	21.00	1.722	0.600	1.033
Reduced Power Level 6 for ENDC (ANT 3)								
	5G NR n2/1RB#1 40M	Front Side	378000	17.82	19.00	1.312	0.302	0.396
	5G NR n2/1RB#1 40M	Back Side	378000	17.82	19.00	1.312	0.371	0.487
	5G NR n2/1RB#1 40M	Left Side	378000	17.82	19.00	1.312	0.193	0.253
	5G NR n2/1RB#1 40M	Top Side	378000	17.82	19.00	1.312	0.304	0.399
	5G NR n2/108RB#54 40M	Front Side	378000	17.68	19.00	1.355	0.245	0.332
	5G NR n2/108RB#54 40M	Back Side	378000	17.68	19.00	1.355	0.308	0.417
	5G NR n2/108RB#54 40M	Left Side	378000	17.68	19.00	1.355	0.125	0.169
	5G NR n2/108RB#54 40M	Top Side	378000	17.68	19.00	1.355	0.236	0.320
Full Power (ANT 0)								
	5G NR n5/1RB#1 20M	Front Side	167800	23.86	25.00	1.300	0.355	0.462
	5G NR n5/1RB#1 20M	Back Side	167800	23.86	25.00	1.300	0.674	0.876
	5G NR n5/1RB#1 20M	Left Side	167800	23.86	25.00	1.300	0.214	0.278
	5G NR n5/1RB#1 20M	Right Side	167800	23.86	25.00	1.300	0.086	0.112
	5G NR n5/1RB#1 20M	Bottom Side	167800	23.86	25.00	1.300	0.355	0.462
75#	5G NR n5/1RB#1 20M	Back Side	166800	23.74	25.00	1.337	0.702	0.938



REPORT No.: SZ24060309S01

	5G NR n5/1RB#1 20M	Back Side	167300	23.78	25.00	1.324	0.700	0.927
	5G NR n5/50RB#25 20M	Front Side	167800	23.72	25.00	1.343	0.360	0.483
	5G NR n5/50RB#25 20M	Back Side	167800	23.72	25.00	1.343	0.550	0.739
	5G NR n5/50RB#25 20M	Left Side	167800	23.72	25.00	1.343	0.171	0.230
	5G NR n5/50RB#25 20M	Right Side	167800	23.72	25.00	1.343	0.080	0.107
	5G NR n5/50RB#25 20M	Bottom Side	167800	23.72	25.00	1.343	0.326	0.438
	5G NR n5/100RB#0 20M	Back Side	167300	22.67	25.00	1.710	0.533	0.911
Reduced Power Level 6 for ENDC (ANT 0)								
	5G NR n5/1RB#1 20M	Front Side	167800	20.86	22.00	1.300	0.221	0.287
	5G NR n5/1RB#1 20M	Back Side	167800	20.86	22.00	1.300	0.347	0.451
	5G NR n5/1RB#1 20M	Left Side	167800	20.86	22.00	1.300	0.128	0.166
	5G NR n5/1RB#1 20M	Right Side	167800	20.86	22.00	1.300	0.080	0.104
	5G NR n5/1RB#1 20M	Bottom Side	167800	20.86	22.00	1.300	0.218	0.283
	5G NR n5/50RB#25 20M	Front Side	167800	20.72	22.00	1.343	0.211	0.283
	5G NR n5/50RB#25 20M	Back Side	167800	20.72	22.00	1.343	0.323	0.434
	5G NR n5/50RB#25 20M	Left Side	167800	20.72	22.00	1.343	0.082	0.110
	5G NR n5/50RB#25 20M	Right Side	167800	20.72	22.00	1.343	0.046	0.062
	5G NR n5/50RB#25 20M	Bottom Side	167800	20.72	22.00	1.343	0.200	0.269
Reduced Power Level 3 (ANT 3)								
	5G NR n25/1RB#1 40M	Front Side	379000	19.84	21.00	1.306	0.418	0.546
	5G NR n25/1RB#1 40M	Back Side	379000	19.84	21.00	1.306	0.621	0.811
	5G NR n25/1RB#1 40M	Left Side	379000	19.84	21.00	1.306	0.205	0.268
	5G NR n25/1RB#1 40M	Top Side	379000	19.84	21.00	1.306	0.297	0.388
	5G NR n25/1RB#1 40M	Back Side	374000	19.70	21.00	1.349	0.544	0.734
	5G NR n25/1RB#1 40M	Back Side	376500	19.71	21.00	1.346	0.694	0.934
	5G NR n25/108RB#54 40M	Front Side	379000	19.69	21.00	1.352	0.408	0.552
	5G NR n25/108RB#54 40M	Back Side	379000	19.69	21.00	1.352	0.663	0.896
	5G NR n25/108RB#54 40M	Left Side	379000	19.69	21.00	1.352	0.348	0.471
	5G NR n25/108RB#54 40M	Top Side	379000	19.69	21.00	1.352	0.402	0.544
	5G NR n25/108RB#54 40M	Back Side	374000	19.68	21.00	1.355	0.648	0.878
76#	5G NR n25/108RB#54 40M	Back Side	376500	19.61	21.00	1.377	0.784	1.080
	5G NR n25/216RB#0 40M	Back Side	379000	18.67	21.00	1.710	0.590	1.009
Reduced Power Level 3 (ANT 3) (HPUE)								
	5G NR n41/1RB#136 100M	Front Side	518598	18.83	20.00	1.309	0.382	0.500
77#	5G NR n41/1RB#136 100M	Back Side	518598	18.83	20.00	1.309	0.642	0.840
	5G NR n41/1RB#136 100M	Left Side	518598	18.83	20.00	1.309	0.409	0.535
	5G NR n41/1RB#136 100M	Top Side	518598	18.83	20.00	1.309	0.306	0.401



	5G NR n41/1RB#136 100M	Back Side	509202	18.76	20.00	1.330	0.629	0.837
	5G NR n41/1RB#136 100M	Back Side	513900	18.67	20.00	1.358	0.611	0.830
	5G NR n41/1RB#136 100M	Back Side	523296	18.77	20.00	1.327	0.622	0.826
	5G NR n41/1RB#136 100M	Back Side	528000	18.80	20.00	1.318	0.629	0.829
	5G NR n41/135RB#67 100M	Front Side	518598	18.53	20.00	1.403	0.335	0.470
	5G NR n41/135RB#67 100M	Back Side	518598	18.53	20.00	1.403	0.553	0.776
	5G NR n41/135RB#67 100M	Left Side	518598	18.53	20.00	1.403	0.385	0.540
	5G NR n41/135RB#67 100M	Top Side	518598	18.53	20.00	1.403	0.291	0.408
	5G NR n41/270RB#67 100M	Back Side	518598	17.55	20.00	1.758	0.471	0.828
Reduced Power Level 3 (ANT 3)								
	5G NR n41/1RB#136 100M	Front Side	518598	19.36	20.50	1.300	0.348	0.452
	5G NR n41/1RB#136 100M	Back Side	518598	19.36	20.50	1.300	0.572	0.744
	5G NR n41/1RB#136 100M	Left Side	518598	19.36	20.50	1.300	0.391	0.508
	5G NR n41/1RB#136 100M	Top Side	518598	19.36	20.50	1.300	0.300	0.390
	5G NR n41/135RB#67 100M	Front Side	518598	18.62	19.50	1.225	0.313	0.383
	5G NR n41/135RB#67 100M	Back Side	518598	18.62	19.50	1.225	0.511	0.626
	5G NR n41/135RB#67 100M	Left Side	518598	18.62	19.50	1.225	0.352	0.431
	5G NR n41/135RB#67 100M	Top Side	518598	18.62	19.50	1.225	0.270	0.331
Reduced Power Level 6 for ENDC (ANT 3) (HPUE)								
	5G NR n41/1RB#136 100M	Front Side	518598	16.89	18.00	1.291	0.240	0.310
	5G NR n41/1RB#136 100M	Back Side	518598	16.89	18.00	1.291	0.351	0.453
	5G NR n41/1RB#136 100M	Left Side	518598	16.89	18.00	1.291	0.260	0.336
	5G NR n41/1RB#136 100M	Top Side	518598	16.89	18.00	1.291	0.151	0.195
	5G NR n41/135RB#67 100M	Front Side	518598	16.59	18.00	1.384	0.182	0.252
	5G NR n41/135RB#67 100M	Back Side	518598	16.59	18.00	1.384	0.267	0.369
	5G NR n41/135RB#67 100M	Left Side	518598	16.59	18.00	1.384	0.198	0.274
	5G NR n41/135RB#67 100M	Top Side	518598	16.59	18.00	1.384	0.115	0.159
Reduced Power Level 6 for ENDC (ANT 3)								
	5G NR n41/1RB#136 100M	Front Side	518598	16.86	18.00	1.300	0.214	0.278
	5G NR n41/1RB#136 100M	Back Side	518598	16.86	18.00	1.300	0.325	0.423
	5G NR n41/1RB#136 100M	Left Side	518598	16.86	18.00	1.300	0.243	0.316
	5G NR n41/1RB#136 100M	Top Side	518598	16.86	18.00	1.300	0.144	0.187
	5G NR n41/135RB#67 100M	Front Side	518598	16.12	17.00	1.225	0.193	0.236
	5G NR n41/135RB#67 100M	Back Side	518598	16.12	17.00	1.225	0.293	0.359
	5G NR n41/135RB#67 100M	Left Side	518598	16.12	17.00	1.225	0.219	0.268
	5G NR n41/135RB#67 100M	Top Side	518598	16.12	17.00	1.225	0.130	0.159



Reduced Power Level 3 (ANT 3)								
	5G NR n66/1RB#1 40M	Front Side	352000	21.37	22.50	1.297	0.551	0.715
	5G NR n66/1RB#1 40M	Back Side	352000	21.37	22.50	1.297	0.819	1.062
	5G NR n66/1RB#1 40M	Left Side	352000	21.37	22.50	1.297	0.293	0.380
	5G NR n66/1RB#1 40M	Top Side	352000	21.37	22.50	1.297	0.513	0.665
	5G NR n66/1RB#1 40M	Back Side	346000	21.20	22.50	1.349	0.776	1.047
	5G NR n66/1RB#1 40M	Back Side	349000	21.32	22.50	1.312	0.761	0.999
	5G NR n66/108RB#54 40M	Front Side	352000	21.17	22.50	1.358	0.568	0.772
78#	5G NR n66/108RB#54 40M	Back Side	352000	21.17	22.50	1.358	0.838	1.138
	5G NR n66/108RB#54 40M	Left Side	352000	21.17	22.50	1.358	0.339	0.460
	5G NR n66/108RB#54 40M	Top Side	352000	21.17	22.50	1.358	0.550	0.747
	5G NR n66/108RB#54 40M	Back Side	346000	21.10	22.50	1.380	0.788	1.088
	5G NR n66/108RB#54 40M	Back Side	349000	21.14	22.50	1.368	0.794	1.086
	5G NR n66/216RB#0 40M	Back Side	352000	20.10	22.50	1.738	0.610	1.060
Reduced Power Level 6 for ENDC (ANT 3)								
	5G NR n66/1RB#1 40M	Front Side	352000	17.93	19.50	1.435	0.198	0.284
	5G NR n66/1RB#1 40M	Back Side	352000	17.93	19.50	1.435	0.340	0.488
	5G NR n66/1RB#1 40M	Left Side	352000	17.93	19.50	1.435	0.117	0.168
	5G NR n66/1RB#1 40M	Top Side	352000	17.93	19.50	1.435	0.193	0.277
	5G NR n66/108RB#54 40M	Front Side	352000	17.73	19.00	1.340	0.207	0.277
	5G NR n66/108RB#54 40M	Back Side	352000	17.73	19.00	1.340	0.339	0.454
	5G NR n66/108RB#54 40M	Left Side	352000	17.73	19.00	1.340	0.111	0.149
	5G NR n66/108RB#54 40M	Top Side	352000	17.73	19.00	1.340	0.201	0.269
Full Power (ANT 0)								
	5G NR n71/1RB#1 20M	Front Side	137600	24.08	25.50	1.387	0.298	0.413
79#	5G NR n71/1RB#1 20M	Back Side	137600	24.08	25.50	1.387	0.368	0.510
	5G NR n71/1RB#1 20M	Left Side	137600	24.08	25.50	1.387	0.069	0.096
	5G NR n71/1RB#1 20M	Right Side	137600	24.08	25.50	1.387	0.259	0.359
	5G NR n71/1RB#1 20M	Bottom Side	137600	24.08	25.50	1.387	0.293	0.406
	5G NR n71/50RB#25 20M	Front Side	137600	23.98	25.00	1.265	0.273	0.345
	5G NR n71/50RB#25 20M	Back Side	137600	23.98	25.00	1.265	0.353	0.446
	5G NR n71/50RB#25 20M	Left Side	137600	23.98	25.00	1.265	0.048	0.061
	5G NR n71/50RB#25 20M	Right Side	137600	23.98	25.00	1.265	0.262	0.331
	5G NR n71/50RB#25 20M	Bottom Side	137600	23.98	25.00	1.265	0.268	0.339
Reduced Power Level 3 (ANT 4)								
(HPUE)								
	5G NR n77/1RB#1 100M	Front Side	633334	19.02	20.00	1.253	0.427	0.535
	5G NR n77/1RB#1 100M	Back Side	633334	19.02	20.00	1.253	0.714	0.895



	5G NR n77/1RB#1 100M	Right Side	633334	19.02	20.00	1.253	0.202	0.253
	5G NR n77/1RB#1 100M	Top Side	633334	19.02	20.00	1.253	0.400	0.501
	5G NR n77/135RB#67 100M	Front Side	633334	18.36	19.50	1.300	0.431	0.561
	5G NR n77/135RB#67 100M	Back Side	633334	18.36	19.50	1.300	0.756	0.983
	5G NR n77/135RB#67 100M	Right Side	633334	18.36	19.50	1.300	0.209	0.271
	5G NR n77/135RB#67 100M	Top Side	633334	18.36	19.50	1.300	0.409	0.531
	5G NR n77/270RB#0 100M	Back Side	633334	17.39	19.50	1.626	0.513	0.834
Reduced Power Level 3 (ANT 4)								
	5G NR n77/1RB#1 100M	Front Side	633334	19.05	20.50	1.396	0.347	0.485
	5G NR n77/1RB#1 100M	Back Side	633334	19.05	20.50	1.396	0.570	0.796
	5G NR n77/1RB#1 100M	Right Side	633334	19.05	20.50	1.396	0.154	0.215
	5G NR n77/1RB#1 100M	Top Side	633334	19.05	20.50	1.396	0.258	0.360
	5G NR n77/135RB#67 100M	Front Side	633334	18.39	20.00	1.449	0.349	0.506
	5G NR n77/135RB#67 100M	Back Side	633334	18.39	20.00	1.449	0.542	0.785
	5G NR n77/135RB#67 100M	Right Side	633334	18.39	20.00	1.449	0.202	0.293
	5G NR n77/135RB#67 100M	Top Side	633334	18.39	20.00	1.449	0.266	0.385
Reduced Power Level 6 for ENDC (ANT 4) (HPUE)								
	5G NR n77/1RB#1 100M	Front Side	633334	16.05	17.00	1.245	0.194	0.241
	5G NR n77/1RB#1 100M	Back Side	633334	16.05	17.00	1.245	0.375	0.467
	5G NR n77/1RB#1 100M	Right Side	633334	16.05	17.00	1.245	0.105	0.131
	5G NR n77/1RB#1 100M	Top Side	633334	16.05	17.00	1.245	0.216	0.269
	5G NR n77/135RB#67 100M	Front Side	633334	15.39	16.50	1.291	0.175	0.226
	5G NR n77/135RB#67 100M	Back Side	633334	15.39	16.50	1.291	0.349	0.451
	5G NR n77/135RB#67 100M	Right Side	633334	15.39	16.50	1.291	0.094	0.121
	5G NR n77/135RB#67 100M	Top Side	633334	15.39	16.50	1.291	0.183	0.236
Reduced Power Level 6 for ENDC (ANT 4)								
	5G NR n77/1RB#1 100M	Front Side	633334	16.05	17.50	1.396	0.190	0.265
	5G NR n77/1RB#1 100M	Back Side	633334	16.05	17.50	1.396	0.320	0.447
	5G NR n77/1RB#1 100M	Right Side	633334	16.05	17.50	1.396	0.083	0.116
	5G NR n77/1RB#1 100M	Top Side	633334	16.05	17.50	1.396	0.253	0.353
	5G NR n77/135RB#67 100M	Front Side	633334	15.39	16.50	1.291	0.167	0.216
	5G NR n77/135RB#67 100M	Back Side	633334	15.39	16.50	1.291	0.274	0.354
	5G NR n77/135RB#67 100M	Right Side	633334	15.39	16.50	1.291	0.077	0.099
	5G NR n77/135RB#67 100M	Top Side	633334	15.39	16.50	1.291	0.250	0.323
Reduced Power Level 3 (ANT 4) (HPUE)								
	5G NR n77/1RB#136 100M	Front Side	662000	18.29	19.50	1.321	0.589	0.778



80#	5G NR n77/1RB#136 100M	Back Side	662000	18.29	19.50	1.321	0.837	1.106
	5G NR n77/1RB#136 100M	Right Side	662000	18.29	19.50	1.321	0.188	0.248
	5G NR n77/1RB#136 100M	Top Side	662000	18.29	19.50	1.321	0.589	0.778
	5G NR n77/1RB#136 100M	Back Side	650000	18.23	19.50	1.340	0.625	0.837
	5G NR n77/1RB#136 100M	Back Side	653000	18.27	19.50	1.327	0.635	0.843
	5G NR n77/1RB#136 100M	Back Side	656000	18.22	19.50	1.343	0.733	0.984
	5G NR n77/1RB#136 100M	Back Side	659000	18.21	19.50	1.346	0.802	1.079
	5G NR n77/135RB#67 100M	Front Side	662000	18.20	19.50	1.349	0.590	0.796
	5G NR n77/135RB#67 100M	Back Side	662000	18.20	19.50	1.349	0.806	1.087
	5G NR n77/135RB#67 100M	Right Side	662000	18.20	19.50	1.349	0.224	0.302
	5G NR n77/135RB#67 100M	Top Side	662000	18.20	19.50	1.349	0.599	0.808
	5G NR n77/135RB#67 100M	Back Side	650000	18.14	19.50	1.368	0.654	0.894
	5G NR n77/135RB#67 100M	Back Side	653000	18.18	19.50	1.355	0.695	0.942
	5G NR n77/135RB#67 100M	Back Side	656000	18.18	19.50	1.355	0.770	1.043
	5G NR n77/135RB#67 100M	Back Side	659000	18.02	19.50	1.406	0.759	1.067
	5G NR n77/270RB#0 100M	Back Side	656000	17.24	19.50	1.683	0.612	1.030
Reduced Power Level 3 (ANT 4)								
	5G NR n77/1RB#1 100M	Front Side	656000	18.22	19.50	1.343	0.267	0.359
	5G NR n77/1RB#1 100M	Back Side	656000	18.22	19.50	1.343	0.404	0.542
	5G NR n77/1RB#1 100M	Right Side	656000	18.22	19.50	1.343	0.123	0.165
	5G NR n77/1RB#1 100M	Top Side	656000	18.22	19.50	1.343	0.205	0.275
	5G NR n77/135RB#67 100M	Front Side	656000	17.73	19.00	1.340	0.304	0.407
	5G NR n77/135RB#67 100M	Back Side	656000	17.73	19.00	1.340	0.442	0.592
	5G NR n77/135RB#67 100M	Right Side	656000	17.73	19.00	1.340	0.103	0.138
	5G NR n77/135RB#67 100M	Top Side	656000	17.73	19.00	1.340	0.245	0.328
Reduced Power Level 6 for ENDC (ANT 4) (HPUE)								
	5G NR n77/1RB#136 100M	Front Side	662000	15.76	16.50	1.186	0.147	0.174
	5G NR n77/1RB#136 100M	Back Side	662000	15.76	16.50	1.186	0.269	0.319
	5G NR n77/1RB#136 100M	Right Side	662000	15.76	16.50	1.186	0.077	0.091
	5G NR n77/1RB#136 100M	Top Side	662000	15.76	16.50	1.186	0.137	0.162
	5G NR n77/135RB#67 100M	Front Side	662000	15.67	16.50	1.211	0.179	0.217
	5G NR n77/135RB#67 100M	Back Side	662000	15.67	16.50	1.211	0.328	0.397
	5G NR n77/135RB#67 100M	Right Side	662000	15.67	16.50	1.211	0.094	0.114
	5G NR n77/135RB#67 100M	Top Side	662000	15.67	16.50	1.211	0.167	0.202
Reduced Power Level 6 for ENDC (ANT 4)								
	5G NR n77/1RB#1 100M	Front Side	656000	16.72	18.00	1.343	0.149	0.200
	5G NR n77/1RB#1 100M	Back Side	656000	16.72	18.00	1.343	0.160	0.215



	5G NR n77/1RB#1 100M	Right Side	656000	16.72	18.00	1.343	0.048	0.064
	5G NR n77/1RB#1 100M	Top Side	656000	16.72	18.00	1.343	0.155	0.208
	5G NR n77/135RB#67 100M	Front Side	656000	16.23	18.00	1.503	0.150	0.225
	5G NR n77/135RB#67 100M	Back Side	656000	16.23	18.00	1.503	0.168	0.253
	5G NR n77/135RB#67 100M	Right Side	656000	16.23	18.00	1.503	0.045	0.068
	5G NR n77/135RB#67 100M	Top Side	656000	16.23	18.00	1.503	0.160	0.241

➤ WLAN Hotspot SAR

Plot No.	Band/Mode	Test Position	CH.	Ave. Power (dBm)	Tune-up Limit (dBm)	Tune-up Scaling Factor	Meas. SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
Reduced Power Level 3 (ANT 5)								
	WLAN2.4GHz/802.11b	Front Side	11	15.94	17.50	1.432	0.204	0.293
81#	WLAN2.4GHz/802.11b	Back Side	11	15.94	17.50	1.432	0.247	0.355
	WLAN2.4GHz/802.11b	Right Side	11	15.94	17.50	1.432	0.189	0.271
	WLAN2.4GHz/802.11b	Top Side	11	15.94	17.50	1.432	0.139	0.200
Reduced Power Level 3 (ANT 5)								
	WLAN5.2GHz/802.11a	Front Side	44	10.99	12.50	1.416	0.084	0.122
82#	WLAN5.2GHz/802.11a	Back Side	44	10.99	12.50	1.416	0.211	0.307
	WLAN5.2GHz/802.11a	Right Side	44	10.99	12.50	1.416	0.161	0.235
	WLAN5.2GHz/802.11a	Top Side	44	10.99	12.50	1.416	0.116	0.169
Reduced Power Level 3 (ANT 5)								
	WLAN5.8GHz/802.11a	Front Side	165	14.69	16.00	1.352	0.045	0.063
83#	WLAN5.8GHz/802.11a	Back Side	165	14.69	16.00	1.352	0.118	0.164
	WLAN5.8GHz/802.11a	Right Side	165	14.69	16.00	1.352	0.082	0.114
	WLAN5.8GHz/802.11a	Top Side	165	14.69	16.00	1.352	0.078	0.109
Full Power (ANT 5)								
	Bluetooth/DH5	Front Side	0	10.67	12.00	1.358	0.023	0.034
84#	Bluetooth/DH5	Back Side	0	10.67	12.00	1.358	0.055	0.081
	Bluetooth/DH5	Right Side	0	10.67	12.00	1.358	0.018	0.027
	Bluetooth/DH5	Top Side	0	10.67	12.00	1.358	0.036	0.053

Note:

- For TDD-LTE, the reported SAR should be scaled with the duty cycle scaling factor 1.006.
- The 2.4G WLAN reported 1g SAR (W/kg) should be scaled with the duty cycle scaling factor 1.003 and WLAN 5.2/5.8 GHz 802.11a with 1.029.
- According to 2016 Oct. TCB workshop for Bluetooth SAR consideration and the theoretical duty cycle is 83.3%, therefore the actual duty cycle will be scaled up to the theoretical value of Bluetooth reported SAR calculation. The duty cycle of Bluetooth is 76.8 %, Therefore the duty cycle scaling factor 1.085 should be used to calculating the reported SAR.



19.5. Repeated SAR Assessment

➤ General Note

In accordance with published RF Exposure KDB procedure 865664 D01 SAR measurement 100 MHz to 6 GHz. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

1. Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg;
2. When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
3. Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
4. Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

➤ Test Results

Plot No.	Band/Mode	Test Position	CH.	Ave. Power (dBm)	Tune-up Limit (dBm)	Tune-up Scaling Factor	Meas. SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
Reduced Power Level 1 (ANT 3)								
OR.	GPRS 1900(2 TX slots)	Right Cheek	661	23.95	25.50	1.429	0.803	1.147
1 st	GPRS 1900(2 TX slots)	Right Cheek	661	23.95	25.50	1.429	0.782	1.117
Reduced Power Level 1 (ANT 3)								
OR.	Band II/RMC 12.2Kbps	Right Cheek	9400	17.29	18.50	1.321	0.838	1.107
1 st	Band II/RMC 12.2Kbps	Right Cheek	9400	17.29	18.50	1.321	0.815	1.077
Reduced Power Level 1 (ANT 3)								
OR.	Band IV/RMC 12.2Kbps	Right Cheek	1513	18.96	20.00	1.271	0.856	1.088
1 st	Band IV/RMC 12.2Kbps	Right Cheek	1513	18.96	20.00	1.271	0.834	1.060
Reduced Power Level 1 (ANT 3)								
OR.	LTE Band 66/1RB#0 20M	Right Cheek	132572	18.52	20.00	1.406	0.835	1.174
1 st	LTE Band 66/1RB#0 20M	Right Cheek	132572	18.52	20.00	1.406	0.824	1.159
Reduced Power Level 1 (ANT 3)								
OR.	5G NR n2/108RB#54 40M	Right Cheek	378000	15.15	16.50	1.365	0.844	1.152
1 st	5G NR n2/108RB#54 40M	Right Cheek	378000	15.15	16.50	1.365	0.824	1.124
Reduced Power Level 1 (ANT 3)								
OR.	5G NR n25/108RB#54 40M	Right Cheek	379000	15.21	16.50	1.346	0.807	1.086



1 st	5G NR n25/108RB#54 40M	Right Cheek	379000	15.21	16.50	1.346	0.781	1.051
Reduced Power Level 1 (ANT 3) (HPUE)								
OR.	5G NR n41/1RB#136 100M	Right Cheek	523296	15.80	17.00	1.318	0.865	1.140
1 st	5G NR n41/1RB#136 100M	Right Cheek	523296	15.80	17.00	1.318	0.839	1.106
Reduced Power Level 1 (ANT 3)								
OR.	5G NR n41/1RB#136 100M	Right Cheek	523296	14.74	16.00	1.337	0.809	1.081
1 st	5G NR n41/1RB#136 100M	Right Cheek	523296	14.74	16.00	1.337	0.781	1.044
Reduced Power Level 1 (ANT 4) (HPUE)								
OR.	5G NR n77/1RB#1 100M	Left Tilt	633334	15.49	16.50	1.262	0.900	1.136
1 st	5G NR n77/1RB#1 100M	Left Tilt	633334	15.49	16.50	1.262	0.881	1.112
Reduced Power Level 2 (ANT 3)								
OR.	5G NR n25/108RB#54 40M	Back Side	379000	24.24	25.50	1.337	0.826	1.104
1 st	5G NR n25/108RB#54 40M	Back Side	379000	24.24	25.50	1.337	0.804	1.075
Reduced Power Level 2 (ANT 4) (HPUE)								
OR.	5G NR n77/135RB#67 100M	Back Side	633334	20.89	22.50	1.449	0.809	1.172
1 st	5G NR n77/135RB#67 100M	Back Side	633334	20.89	22.50	1.449	0.788	1.142
Full Power (ANT 0)								
OR.	GPRS 850(4 TX slots)	Back Side	251	29.57	30.50	1.239	0.925	1.146
1 st	GPRS 850(4 TX slots)	Back Side	251	29.57	30.50	1.239	0.900	1.115
Full Power (ANT 0)								
OR.	Band V/RMC 12.2Kbps	Back Side	4132	24.10	25.50	1.380	0.832	1.148
1 st	Band V/RMC 12.2Kbps	Back Side	4132	24.10	25.50	1.380	0.811	1.119
Reduced Power Level 3 (ANT 3)								
OR.	LTE Band 2/1RB#0 20M	Back Side	19100	21.65	23.00	1.365	0.846	1.154
1 st	LTE Band 2/1RB#0 20M	Back Side	19100	21.65	23.00	1.365	0.801	1.093
Reduced Power Level 3 (ANT 3)								
OR.	5G NR n2/1RB#1 40M	Back Side	376000	19.74	21.00	1.337	0.810	1.083
1 st	5G NR n2/1RB#1 40M	Back Side	376000	19.74	21.00	1.337	0.792	1.059
Reduced Power Level 3 (ANT 3)								
OR.	5G NR n66/108RB#54 40M	Back Side	352000	21.17	22.50	1.358	0.838	1.138
1 st	5G NR n66/108RB#54 40M	Back Side	352000	21.17	22.50	1.358	0.802	1.089
Reduced Power Level 3 (ANT 4)								
OR.	5G NR n77/1RB#136 100M	Back Side	662000	18.29	19.50	1.321	0.837	1.106
1 st	5G NR n77/1RB#136 100M	Back Side	662000	18.29	19.50	1.321	0.813	1.074

19.6. Extremity SAR Assessment

➤ General Guidance

1. According to KDB 648747 D04v01r03 The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB Publication 865664 D01 to address interactive hand use exposure conditions.
2. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.
3. According to the user manual, the EUT diagonal size is greater than 16cm, therefore the 0mm extremity SAR of WLAN 5GHz is required. There are two types of antennas in this device, only the worst antenna was tested the extremity SAR in this report.

➤ Test Results

Plot No.	Band/Mode	Test Position	CH.	Ave. Power (dBm)	Tune-up Limit (dBm)	Tune-up Scaling Factor	Meas. SAR _{10g} (W/kg)	Reported SAR _{10g} (W/kg)
Reduced Power Level 2 (ANT 5)								
	WLAN5.3GHz/802.11a	Front Side	52	10.75	12.00	1.334	0.132	0.181
85#	WLAN5.3GHz/802.11a	Back Side	52	10.75	12.00	1.334	0.257	0.353
Reduced Power Level 2 (ANT 5)								
	WLAN5.5GHz/802.11a	Front Side	116	13.33	14.50	1.309	0.134	0.179
86#	WLAN5.5GHz/802.11a	Back Side	116	13.33	14.50	1.309	0.256	0.343

Note: The 5.3G WLAN 802.11a reported 1g SAR (W/kg) should be scaled with the duty cycle scaling factor 1.029 and WLAN 5.5GHz with 1.022.

20. Simultaneous Transmission Evaluation

20.1. Simultaneous Transmission Consideration

No.	Simultaneous Transmission Consideration	Head	Body-Worn	Hotspot
1	WWAN+WLAN 2.4GHz	Yes	Yes	Yes
2	WWAN+WLAN 5.2GHz/5.8GHz	Yes	Yes	Yes
3	WWAN+WLAN 5.3GHz/5.5GHz	Yes	Yes	No
4	WWAN+Bluetooth	No	Yes	Yes
5	WWAN+WLAN 5.2GHz/5.8GHz+Bluetooth	No	Yes	Yes
6	WWAN+WLAN 5.3GHz/5.5GHz+Bluetooth	No	Yes	No

Note:

- When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of the WWAN and WLAN transmitters. The "Portable Hotspot" feature on the handset was NOT activated, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal.
- The hotspot SAR result may overlap with the body-worn accessory SAR requirements, per KDB 941225 D06, the more conservative configurations can be considered, thus excluding some unnecessary body-worn accessory SAR tests.
- Simultaneous Transmission SAR evaluation is not required for BT and WLAN 2.4GHz, because the software mechanism has been incorporated to guarantee that the WLAN and Bluetooth transmitters would not simultaneously operate.
- Per KDB 447498D01v06, simultaneous transmission SAR evaluation procedures is as followed:
Step 1: If sum of 1 g SAR < 1.6 W/kg, Simultaneous SAR measurement is not required.
Step 2: If sum of 1 g SAR > 1.6 W/kg, ratio of SAR to peak separation distance for pair of transmitters calculated.
Step 3: If the ratio of SAR to peak separation distance is ≤ 0.04 , Simultaneous SAR measurement is not required.
Step 4: If the ratio of SAR to peak separation distance is > 0.04 , Simultaneous SAR measurement is required and simultaneous transmission SAR value is calculated.
(The ratio is determined by: $(SAR_1 + SAR_2) \wedge 1.5/R_i \leq 0.04$,
R_i is the separation distance between the peak SAR locations for the antenna pair in mm.
- This device does not support the combination of WWAN+WLAN 2.4GHz+WLAN 5GHz.

20.2. Simultaneous Transmission Analysis

Remark: The 5G EN-DC & CA Data and simultaneous transmission data were recorded in annex F.

21. Uncertainty Assessment

According to KDB 865664 D01 SAR measurement 100 MHz to 6GHz, when the highest measured 1-g SAR is less than 1.5 W/kg and 10-g extremity SAR less than 3.75 W/kg, the expanded SAR measurement uncertainty must be less than 30% with a confidence interval of $k=2$. When these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE 1528-2013 is not required in the SAR report and submitted for equipment approval. For this device, both the 1-g SAR is less than 1.5 W/kg and 10-g extremity SAR less than 3.75 W/kg. Therefore the measurement uncertainty table is not required in this report.



Annex A General Information

1. Identification of the Responsible Testing Laboratory

Laboratory Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Laboratory Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

2. Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

3. Facilities and Accreditations

The FCC designation number is CN1192, the test firm registration number is 226174.

Note:

The main report is end here and the other Annex (B,C,D,E,F,G) will be submitted separately.

***** END OF MAIN REPORT *****