

TEST REPORT

Application No.: BTEK240308013AE
Version Number: V0
Applicant: Jiang Su Yisin Tech Co., Ltd
Address of Applicant: Rm. 103, Bldg. 1, No. 10, Wenzhou Rd., ETDZ, Shuyang County, Suqian, Jiangsu, CN
Manufacturer: Jiang Su Yisin Tech Co., Ltd
Address of Manufacturer: Rm. 103, Bldg. 1, No. 10, Wenzhou Rd., ETDZ, Shuyang County, Suqian, Jiangsu, CN
Factory: Rayson Technology (SZ)Co., Ltd.
Address of Factory: No.1, Tongfu 1st Road, The 2nd industrial Zone, Loucun, Guangming New District, Shenzhen, China

Equipment Under Test (EUT):

EUT Name: TX Microphone
Model No.: AMP10
Trade Mark: MoerLab
Standard(s) : 47 CFR Part 15, Subpart C 15.247
Date of Receipt: 2024-03-08
Date of Test: 2024-03-08 to 2024-06-03
Date of Issue: 2024-06-03

Test Result:	Pass*
---------------------	--------------


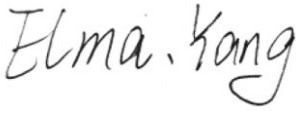
* In the configuration tested, the EUT complied with the standards specified above.



Damon Su
EMC Laboratory Manager



Revision Record				
Version	Chapter	Date	Modifier	Remark
V0		2024-06-03		Original

Authorized for issue by				
				
		<hr/>		
		Carl Yang /Project Engineer		
				
		<hr/>		
		Elma Yang /Reviewer		



2 Test Summary

Radio Spectrum Technical Requirement				
Item	Standard	Method	Requirement	Result
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)	Pass
Other requirements Frequency Hopping Spread Spectrum System Hopping Sequence		N/A	47 CFR Part 15, Subpart C 15.247(a)(1),(g),(h)	Pass

Radio Spectrum Matter Part				
Item	Standard	Method	Requirement	Result
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass
Conducted Peak Output Power		ANSI C63.10 (2013) Section 7.8.5	47 CFR Part 15, Subpart C 15.247(b)(1)	Pass
20dB Bandwidth		ANSI C63.10 (2013) Section 7.8.7	47 CFR Part 15, Subpart C 15.247(a)(1)	Pass
Carrier Frequencies Separation		ANSI C63.10 (2013) Section 7.8.2	47 CFR Part 15, Subpart C 15.247a(1)	Pass
Hopping Channel Number		ANSI C63.10 (2013) Section 7.8.3	47 CFR Part 15, Subpart C 15.247a(1)(iii)	Pass
Dwell Time		ANSI C63.10 (2013) Section 7.8.4	47 CFR Part 15, Subpart C 15.247a(1)(iii)	Pass
Conducted Band Edges Measurement		ANSI C63.10 (2013) Section 7.8.6	47 CFR Part 15, Subpart C 15.247(d)	Pass
Conducted Spurious Emissions		ANSI C63.10 (2013) Section 7.8.8	47 CFR Part 15, Subpart C 15.247(d)	Pass
Radiated Emissions which fall in the restricted bands		ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Radiated Spurious Emissions (Below 1GHz)		ANSI C63.10 (2013) Section 6.4,6.5,6.6	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Radiated Spurious Emissions (Above 1GHz)		ANSI C63.10 (2013) Section 6.4,6.5,6.6	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass

Note:

E.U.T./EUT means Equipment Under Test.

Pass means the test result passed the test standard requirement, please find the detailed decision rule in the report relative section.



3 Contents

	Page
1 Cover Page	1
2 Test Summary	3
3 Contents	4
4 General Information	6
4.1 Details of E.U.T.	6
4.2 Description of Support Units	6
4.3 Measurement Uncertainty	6
4.4 Test Location.....	7
4.5 Deviation from Standards.....	7
4.6 Abnormalities from Standard Conditions	7
5 Equipment List	8
6 Radio Spectrum Technical Requirement	10
6.1 Antenna Requirement	10
6.1.1 Test Requirement:	10
6.1.2 Conclusion	10
6.2 Other requirements Frequency Hopping Spread Spectrum System Hopping Sequence	11
6.2.1 Test Requirement:	11
6.2.2 Conclusion	12
7 Radio Spectrum Matter Test Results	14
7.1 Conducted Emissions at AC Power Line (150kHz-30MHz).....	14
7.1.1 E.U.T. Operation	14
7.1.2 Test Mode Description	14
7.1.3 Test Setup Diagram	15
7.1.4 Measurement Procedure and Data.....	15
7.2 Conducted Peak Output Power.....	18
7.2.1 E.U.T. Operation	18
7.2.2 Test Mode Description	18
7.2.3 Test Setup Diagram	18
7.2.4 Measurement Procedure and Data.....	18
7.3 20dB Bandwidth	19
7.3.1 E.U.T. Operation	19
7.3.2 Test Mode Description	19
7.3.3 Test Setup Diagram	19
7.3.4 Measurement Procedure and Data.....	19
7.4 Carrier Frequencies Separation	20
7.4.1 E.U.T. Operation	20
7.4.2 Test Mode Description	20
7.4.3 Test Setup Diagram	20
7.4.4 Measurement Procedure and Data.....	20
7.5 Hopping Channel Number.....	21
7.5.1 E.U.T. Operation	21
7.5.2 Test Mode Description	21
7.5.3 Test Setup Diagram	21
7.5.4 Measurement Procedure and Data.....	21
7.6 Dwell Time.....	22



7.6.1	E.U.T. Operation	22
7.6.2	Test Mode Description	22
7.6.3	Test Setup Diagram	22
7.6.4	Measurement Procedure and Data.....	22
7.7	Conducted Band Edges Measurement	23
7.7.1	E.U.T. Operation	23
7.7.2	Test Mode Description	23
7.7.3	Test Setup Diagram	24
7.7.4	Measurement Procedure and Data.....	24
7.8	Conducted Spurious Emissions	25
7.8.1	E.U.T. Operation	25
7.8.2	Test Mode Description	25
7.8.3	Test Setup Diagram	25
7.8.4	Measurement Procedure and Data.....	25
7.9	Radiated Emissions which fall in the restricted bands	26
7.9.1	E.U.T. Operation	26
7.9.2	Test Mode Description	26
7.9.3	Test Setup Diagram	27
7.9.4	Measurement Procedure and Data.....	27
7.10	Radiated Spurious Emissions (Below 1GHz).....	29
7.10.1	E.U.T. Operation.....	29
7.10.2	Test Mode Description.....	29
7.10.3	Test Setup Diagram.....	30
7.10.4	Measurement Procedure and Data	30
7.11	Radiated Spurious Emissions (Above 1GHz)	33
7.11.1	E.U.T. Operation.....	33
7.11.2	Test Mode Description.....	33
7.11.3	Test Setup Diagram.....	33
7.11.4	Measurement Procedure and Data	34
8	Test Setup Photo	37
9	EUT Constructional Details (EUT Photos)	37
10	Appendix.....	38



4 General Information

4.1 Details of E.U.T.

Power supply:	DC 4.35V/3.8V from battery or recharge by USB port
Cable(s):	/
Frequency Range:	2402MHz to 2480MHz
Bluetooth Version:	V5.0 Classic
	This test report is for classic mode.
Spectrum Spread Technology:	Frequency Hopping Spread Spectrum(FHSS)
Hopping Channel Type:	Adaptive Frequency Hopping systems
Modulation Type:	GFSK, $\pi/4$ DQPSK, 8DPSK
Number of Channels:	79
Sample Type:	Portable device
Antenna Type:	FPC Antenna
Antenna Gain:	2.66dBi
Remark: The information in this section is provided by the applicant or manufacturer, BANTEK is not liable to the accuracy, suitability, reliability or/and integrity of the information.	
Sample No.:	BTEK240308013AE-01

4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
Adapter	JW	0441	--

4.3 Measurement Uncertainty

Test Item	Measurement Uncertainty
Conducted Emissions at AC Power Line (150kHz-30MHz)	± 3.12 dB
Conducted Peak Output Power	± 0.75 dB
20dB Bandwidth	$\pm 3\%$
Carrier Frequencies Separation	$\pm 7.25 \times 10^{-8}$
Hopping Channel Number	$\pm 7.25 \times 10^{-8}$
Dwell Time	$\pm 0.37\%$
Conducted Band Edges Measurement	± 0.75 dB
Conducted Spurious Emissions	± 0.75 dB
Radiated Emissions which fall in the restricted bands	± 5.08 dB (1GHz-6GHz); ± 5.14 dB(above 6GHz)
Radiated Spurious Emissions (Below 1GHz)	± 5.06 dB (3m); ± 4.46 dB (10m)
Radiated Spurious Emissions (Above 1GHz)	± 5.08 dB (1GHz-6GHz); ± 5.14 dB(above 6GHz)



4.4 Test Location

All tests were performed at:

Shenzhen BANTEK Testing Co., Ltd.,

A5&A6, Building B1&B2, No.45 Gangtou Road, Bogang Community, Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Tel:0755-2334 4200 Fax: 0755-2334 4200

FCC Registration Number: 264293

Designation Number: CN1356

No tests were sub-contracted.

4.5 Deviation from Standards

None

4.6 Abnormalities from Standard Conditions

None



5 Equipment List

Conducted Test					
Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Shielding Room	YIHENG ENECTRONIC	9*5*3.3	YH-BT-220304-04	2022-03-03	2025-03-02
EMI Test Receiver	Rohde&Schwarz	ESCI	101021	2023-06-12	2024-06-11
Measurement Software	Fara	EZ_EMV Ver. FA-03A2	N/A	N/A	N/A
LISN	Rohde&Schwarz	ENV216	101472	2023-06-12	2024-06-11
LISN	Schwarzbeck	NSLK 8128	05127	2023-06-12	2024-06-11

RF Conducted					
Equipment	Manufacturer	Model No	Serial No	Cal Date	Cal Due Date
Shielding Room	YIHENG ENECTRONIC	5.5*3.1*3	YH-BT-220304-03	2022-03-03	2025-03-02
EXA Signal Analyzer	KEYSIGHT	N9020A	MY54230486	2023-06-12	2024-06-11
DC Power Supply	E3632A	E3642A	KR75304416	2023-06-12	2024-06-11
Attenuator	RswTech	SMA-JK-6dB	N/A	2023-06-12	2024-06-11
Attenuator	RswTech	SMA-JK-3dB	N/A	2023-06-12	2024-06-11
RF Control Unit	Techy	TR1029-1	N/A	2023-06-12	2024-06-11
RF Sensor Unit	Techy	TR1029-2	N/A	2023-06-12	2024-06-11
WIDEBAND RADIO COMMUNICATION TESTER	R&S	CMW 500	141258	2023-06-12	2024-06-11
MXG Vector Signal Generator	Agilent	N5182A	US46240522	2023-06-12	2024-06-11
Programmable Temperature&Humidity Chamber	GRT	GR-HWX1000	GR22051001	2023-06-12	2024-06-11
Measurement Software	TACHOY	RF TestSoft	N/A	N/A	N/A

RSE					
Equipment	Manufacturer	Model No	Serial No	Cal Date	Cal Due Date
3m Semi-Anechoic Chamber	YIHENG ENECTRONIC	966	YH-BT-220304-01	2022-05-06	2025-05-05
EMI Test Receiver	Rohde&Schwarz	ESCI	100694	2023-06-12	2024-06-11
TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	01324	2022-06-15	2025-06-14
Pre-Amplifier	Schwarzbeck	BBV 9745	#180	2023-06-12	2024-06-11
Measurement Software	Fara	EZ_EMV Ver. FA-03A2	N/A	2023-06-12	2024-06-11
EXA Signal Analyzer	Keysight	N9020A	MY54440290	2023-06-12	2024-06-11
Horn Antenna	Schwarzbeck	BBHA 9120D	02695	2022-06-15	2025-06-14
Pre-Amplifier	Tonscend	TAP0118045	AP20K806109	2023-06-12	2024-06-11



Horn Antenna	SCHWARZBECK	BBHA9170	1157	2022-06-15	2025-06-14
Low Noise Pre-amplifier	SKET	LNPA-1840G-50	SK2022032902	2023-06-12	2024-06-11
Signal analyzer	ROHDE&SCHWARZ	FSQ40	100010	2023-06-12	2024-06-11
Loop Antenna	ETS	6502	00201177	2022-06-15	2025-06-14

General used equipment					
Equipment	Manufacturer	Model No	Serial No	Cal Date	Cal Due Date
Humidity/Temperature/Brometric Pressure Indicator	KUMAR	F132	N/A	2023-06-12	2024-06-11
Humidity/Temperature/Brometric Pressure Indicator	KUMAR	F132	N/A	2023-06-12	2024-06-11



6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)

6.1.2 Conclusion

Standard Requirement:

Testing shall be performed using the highest gain antenna of each combination of licence-exempt transmitter and antenna type, with the transmitter output power set at the maximum level. When a measurement at the antenna connector is used to determine RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna manufacturer.


15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is a FPC antenna and no consideration of replacement. The best case gain of the antenna is 2.66dBi.

Please refer to internal photos.

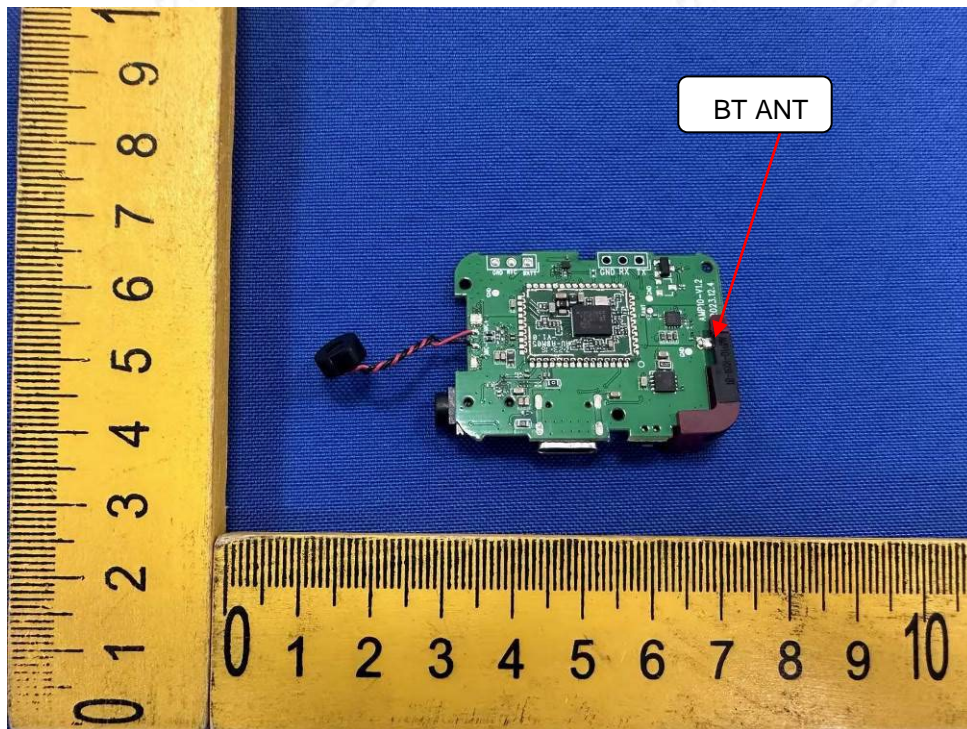

6.2 Other requirements Frequency Hopping Spread Spectrum System Hopping Sequence

6.2.1 Test Requirement:

47 CFR Part 15, Subpart C 15.247(a)(1),(g),(h)

Limit:

Standard Requirement:

The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.

The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.


Compliance for section 15.247(a)(1):

According to Technical Specification, the pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.

- > Number of shift register stages: 9
- > Length of pseudo-random sequence: $2^9 - 1 = 511$ bits
- > Longest sequence of zeros: 8 (non-inverted signal)


Linear Feedback Shift Register for Generation of the PRBS sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:

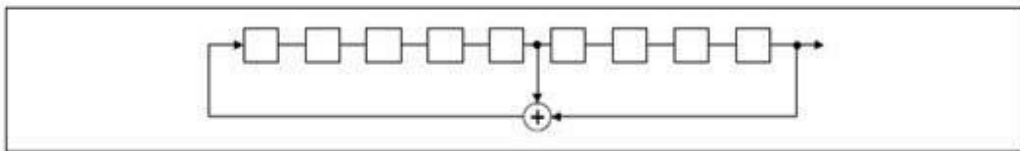

Linear Feedback Shift Register for Generation of the PRBS sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:

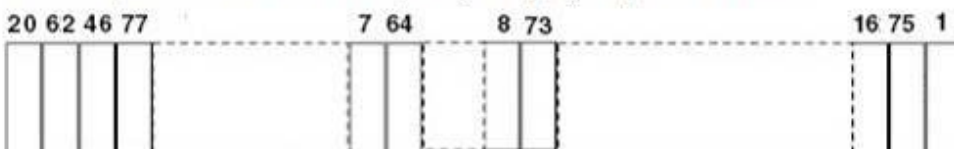

Each frequency used equally on the average by each transmitter.

According to Technical Specification, the receivers are designed to have input and IF bandwidths that match the hopping channel bandwidths of any transmitters and shift frequencies in synchronization with the transmitted signals.

Compliance for section 15.247(g):

According to Technical Specification, the system transmits the packet with the pseudorandom hopping frequency with a continuous data and the short burst transmission from the Bluetooth system is also transmitted under the frequency hopping system with the pseudorandom hopping frequency system.

Compliance for section 15.247(h):

According to Technical specification, the system incorporates with an adaptive system to detect other user within the spectrum band so that it individually and independently to avoid hopping on the occupied channels.

The system is designed not have the ability to coordinated with other FHSS System in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitter.

6.2.2 Conclusion

Standard Requirement:

The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.

The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

Compliance for section 15.247(a)(1):

According to Technical Specification, the pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.

> Number of shift register stages: 9

> Length of pseudo-random sequence: $2^9 - 1 = 511$ bits

> Longest sequence of zeros: 8 (non-inverted signal)

Linear Feedback Shift Register for Generation of the PRBS sequence

Each frequency used equally on the average by each transmitter.

According to Technical Specification, the receivers are designed to have input and IF bandwidths that match the hopping channel bandwidths of any transmitters and shift frequencies in synchronization with the transmitted signals.

Compliance for section 15.247(g):



According to Technical Specification, the system transmits the packet with the pseudorandom hopping frequency with a continuous data and the short burst transmission from the Bluetooth system is also transmitted under the frequency hopping system with the pseudorandom hopping frequency system.

Compliance for section 15.247(h):

According to Technical specification, the system incorporates with an adaptive system to detect other user within the spectrum band so that it individually and independently to avoid hopping on the occupied channels.

The system is designed not have the ability to coordinated with other FHSS System in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitter.



7 Radio Spectrum Matter Test Results

7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207

Test Method: ANSI C63.10 (2013) Section 6.2

Limit:

Frequency of emission(MHz)	Conducted limit(dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

Detector: Peak for pre-scan (9kHz resolution bandwidth) 0.15M to 30MHz

7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 22.2 °C

Humidity: 60.5 % RH


Atmospheric Pressure: 1010 mbar

7.1.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	26	Charge + TX_non-Hop mode_Keep the EUT in charging and continuously transmitting mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.
Pre-scan	28	Charge + TX_Hop mode_Keep the EUT in charging and frequency hopping mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.



7.1.3 Test Setup Diagram

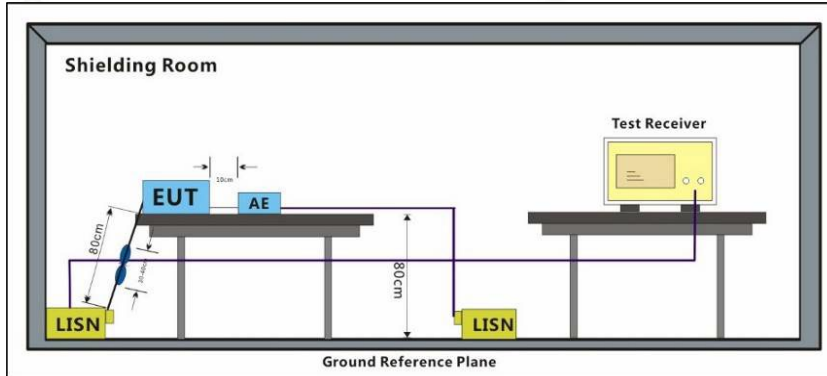


7.1.4 Measurement Procedure and Data

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 50\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane.
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark: $\text{LISN} = \text{Read Level} + \text{Cable Loss} + \text{LISN Factor}$



Test Mode: 26; Line: Live line; Modulation:GFSK; ; Channel:Low

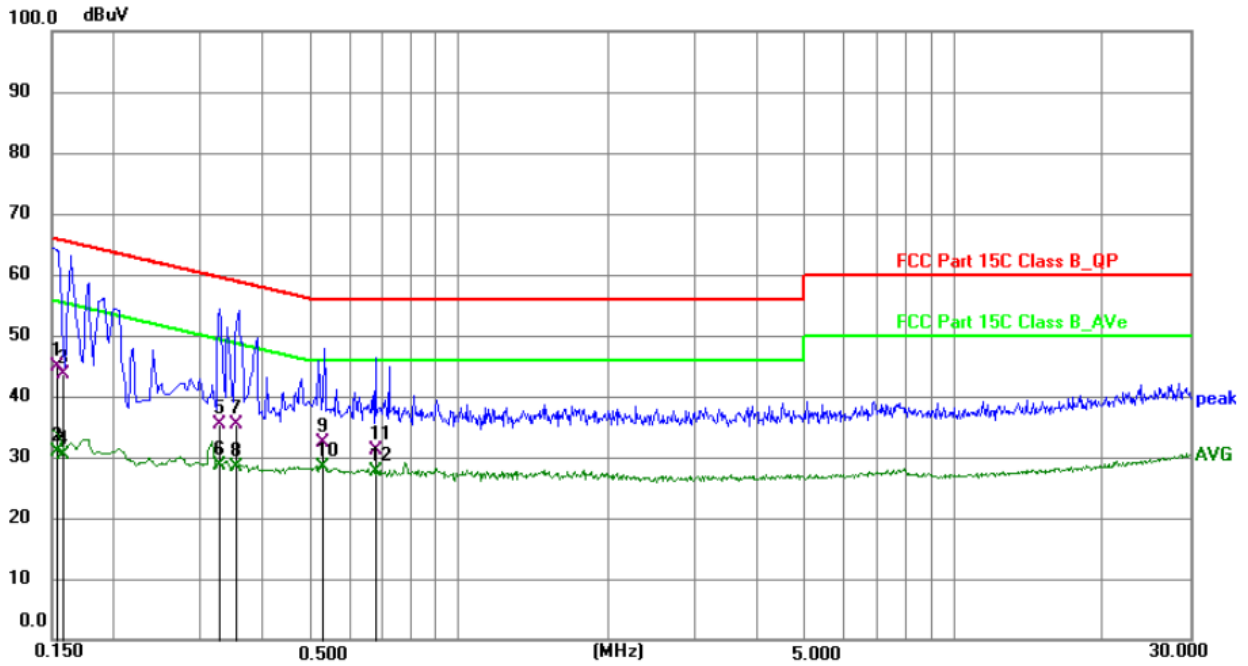


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1536	25.19	19.75	44.94	65.80	-20.86	QP	P	
2	0.1536	11.18	19.75	30.93	55.80	-24.87	AVG	P	
3	0.1583	24.00	19.75	43.75	65.55	-21.80	QP	P	
4	0.1583	10.52	19.75	30.27	55.55	-25.28	AVG	P	
5	0.3274	15.66	19.82	35.48	59.52	-24.04	QP	P	
6	0.3274	8.74	19.82	28.56	49.52	-20.96	AVG	P	
7	0.3542	15.51	19.82	35.33	58.86	-23.53	QP	P	
8	0.3542	8.68	19.82	28.50	48.86	-20.36	AVG	P	
9	0.5295	12.60	19.85	32.45	56.00	-23.55	QP	P	
10 *	0.5295	8.55	19.85	28.40	46.00	-17.60	AVG	P	
11	0.6807	11.18	19.91	31.09	56.00	-24.91	QP	P	
12	0.6807	7.73	19.91	27.64	46.00	-18.36	AVG	P	

Note: Level =Read Level+Factor



Test Mode: 26; Line: Neutral Line; Modulation:GFSK; ; Channel:Low

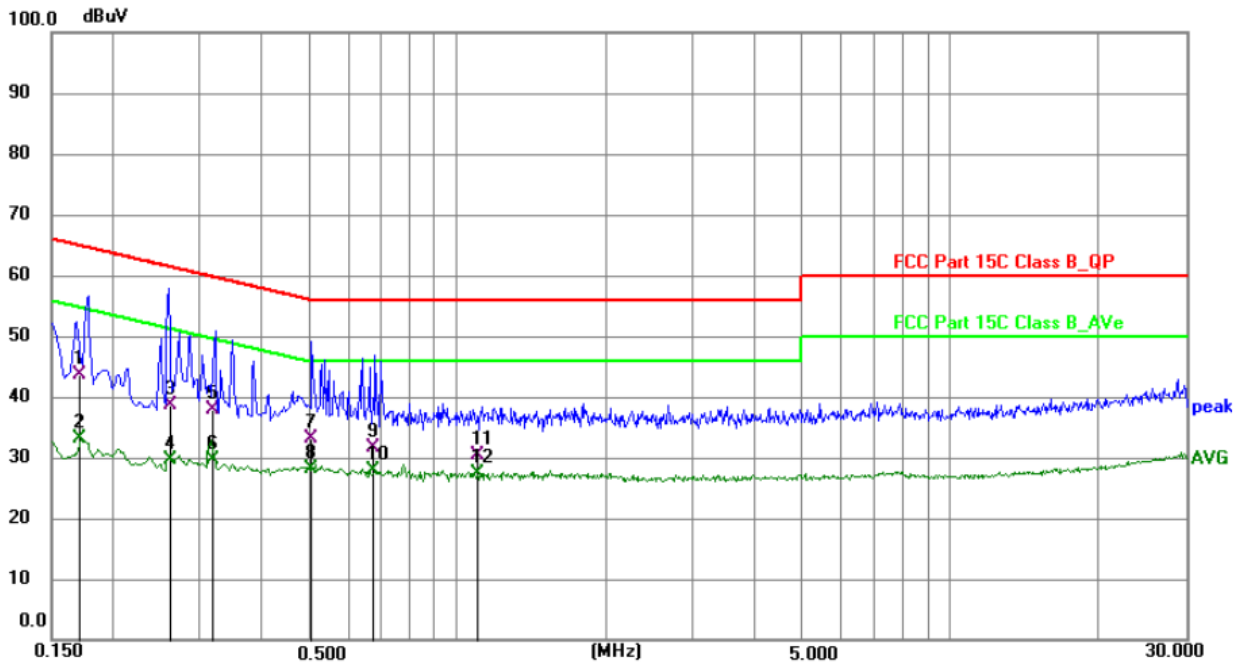

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1716	23.77	19.79	43.56	64.88	-21.32	QP	P	
2	0.1716	13.22	19.79	33.01	54.88	-21.87	AVG	P	
3	0.2612	18.69	19.82	38.51	61.39	-22.88	QP	P	
4	0.2612	9.75	19.82	29.57	51.39	-21.82	AVG	P	
5	0.3199	18.15	19.83	37.98	59.71	-21.73	QP	P	
6	0.3199	9.89	19.83	29.72	49.71	-19.99	AVG	P	
7	0.5029	13.33	19.84	33.17	56.00	-22.83	QP	P	
8 *	0.5029	8.35	19.84	28.19	46.00	-17.81	AVG	P	
9	0.6753	11.74	19.91	31.65	56.00	-24.35	QP	P	
10	0.6753	7.85	19.91	27.76	46.00	-18.24	AVG	P	
11	1.1033	10.43	20.03	30.46	56.00	-25.54	QP	P	
12	1.1033	7.28	20.03	27.31	46.00	-18.69	AVG	P	

Note: Level =Read Level+Factor



7.2 Conducted Peak Output Power

Test Requirement 47 CFR Part 15, Subpart C 15.247(b)(1)
 Test Method: ANSI C63.10 (2013) Section 7.8.5
 Limit:

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq$ hopping channels < 50
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation


7.2.1 E.U.T. Operation

Operating Environment:
 Temperature: 20.5 °C Humidity: 50.0 % RH Atmospheric Pressure: 1010 mbar

7.2.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Pre-scan	25	TX_non-Hop mode_Keep the EUT in continuously transmitting mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.
Final test	26	Charge + TX_non-Hop mode_Keep the EUT in charging and continuously transmitting mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.2.3 Test Setup Diagram

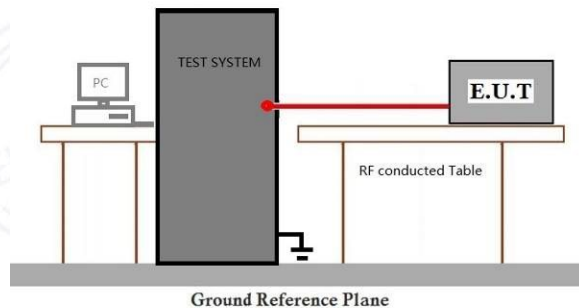

7.2.4 Measurement Procedure and Data

cable loss=0.9dB

Please Refer to Appendix for Details



7.3 20dB Bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.247(a)(1)
 Test Method: ANSI C63.10 (2013) Section 7.8.7


7.3.1 E.U.T. Operation

Operating Environment:
 Temperature: 20.5 °C Humidity: 50.0 % RH Atmospheric Pressure: 1010 mbar

7.3.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Pre-scan	25	TX_non-Hop mode_Keep the EUT in continuously transmitting mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.
Final test	26	Charge + TX_non-Hop mode_Keep the EUT in charging and continuously transmitting mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.3.3 Test Setup Diagram

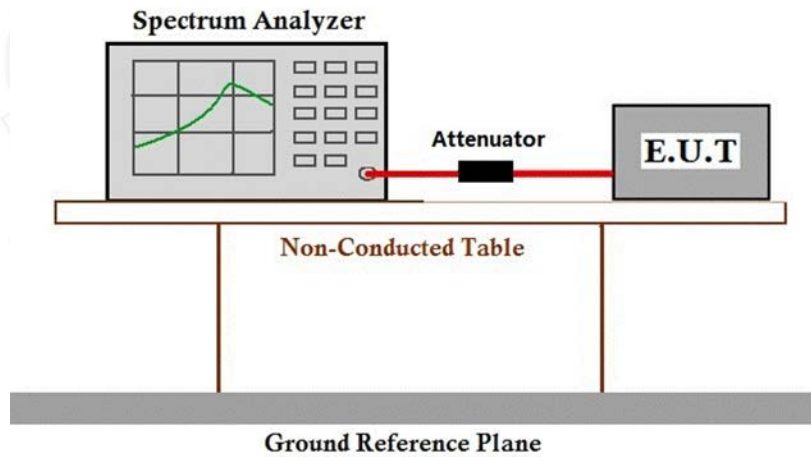

7.3.4 Measurement Procedure and Data

cable loss=0.9dB

Please Refer to Appendix for Details



7.4 Carrier Frequencies Separation

Test Requirement 47 CFR Part 15, Subpart C 15.247a(1)

Test Method: ANSI C63.10 (2013) Section 7.8.2

Limit:

2/3 of the 20dB bandwidth base on the transmission power is less than 0.125W.

7.4.1 E.U.T. Operation

Operating Environment:

Temperature: 20.5 °C


Humidity: 50.0 % RH

Atmospheric Pressure: 1010 mbar

7.4.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Pre-scan	25	TX_non-Hop mode_Keep the EUT in continuously transmitting mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.
Final test	26	Charge + TX_non-Hop mode_Keep the EUT in charging and continuously transmitting mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.4.3 Test Setup Diagram

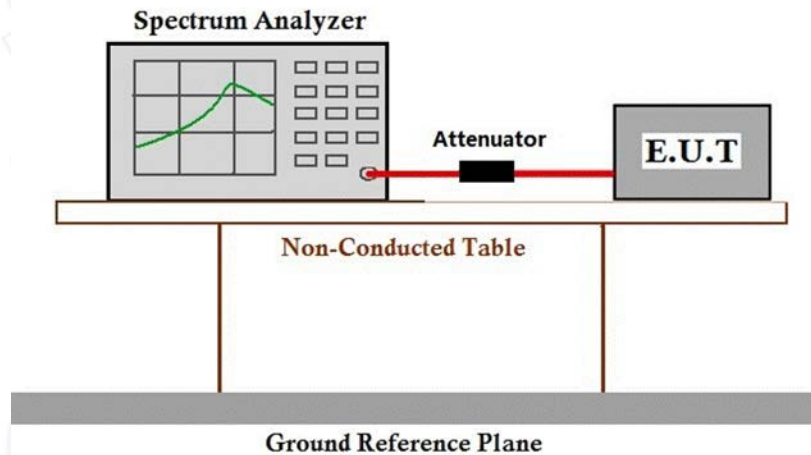

7.4.4 Measurement Procedure and Data

cable loss=0.9dB

Please Refer to Appendix for Details



7.5 Hopping Channel Number

Test Requirement 47 CFR Part 15, Subpart C 15.247a(1)(iii)

Test Method: ANSI C63.10 (2013) Section 7.8.3

Limit:

Frequency range(MHz)	Number of hopping channels (minimum)
902-928	50 for 20dB bandwidth <250kHz
	25 for 20dB bandwidth ≥250kHz
2400-2483.5	15
5725-5850	75

7.5.1 E.U.T. Operation


Operating Environment:

Temperature: 20.5 °C Humidity: 50.0 % RH Atmospheric Pressure: 1010 mbar

7.5.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Pre-scan	27	TX_Hop mode_Keep the EUT in frequency hopping mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.
Final test	28	Charge + TX_Hop mode_Keep the EUT in charging and frequency hopping mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.5.3 Test Setup Diagram

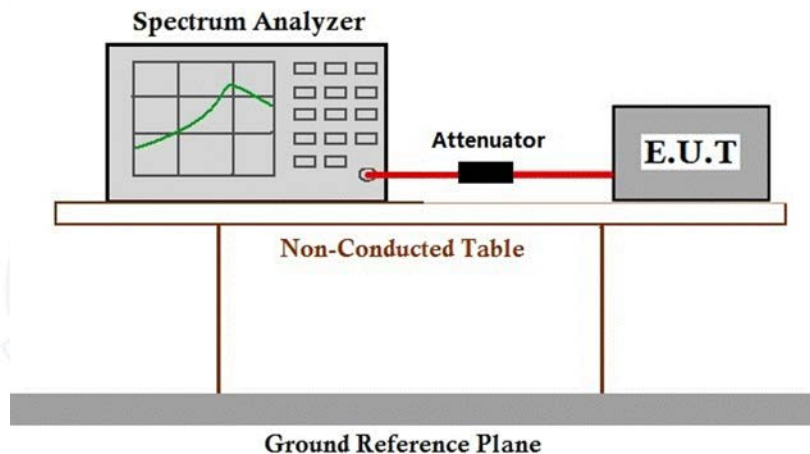

7.5.4 Measurement Procedure and Data

cable loss=0.9dB

Please Refer to Appendix for Details



7.6 Dwell Time

Test Requirement 47 CFR Part 15, Subpart C 15.247a(1)(iii)

Test Method: ANSI C63.10 (2013) Section 7.8.4

Limit:

Frequency(MHz)	Limit
902-928	0.4s within a 20s period(20dB bandwidth<250kHz)
	0.4s within a 10s period(20dB bandwidth≥250kHz)
2400-2483.5	0.4s within a period of 0.4s multiplied by the number of hopping channels
5725-5850	0.4s within a 30s period

7.6.1 E.U.T. Operation


Operating Environment:

Temperature: 20.5 °C Humidity: 50.0 % RH Atmospheric Pressure: 1010 mbar

7.6.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Pre-scan	27	TX_Hop mode_Keep the EUT in frequency hopping mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.
Final test	28	Charge + TX_Hop mode_Keep the EUT in charging and frequency hopping mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.6.3 Test Setup Diagram

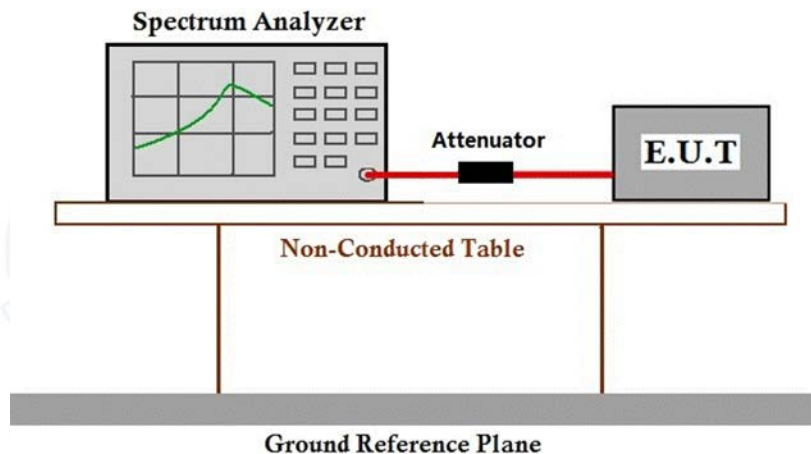

7.6.4 Measurement Procedure and Data

cable loss=0.9dB

Please Refer to Appendix for Details



7.7 Conducted Band Edges Measurement

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)
Test Method: ANSI C63.10 (2013) Section 7.8.6
Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.7.1 E.U.T. Operation


Operating Environment:
Temperature: 20.5 °C Humidity: 50.0 % RH Atmospheric Pressure: 1010 mbar

7.7.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Pre-scan	25	TX_non-Hop mode_Keep the EUT in continuously transmitting mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.
Final test	26	Charge + TX_non-Hop mode_Keep the EUT in charging and continuously transmitting mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.
Pre-scan	27	TX_Hop mode_Keep the EUT in frequency hopping mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.
Final test	28	Charge + TX_Hop mode_Keep the EUT in charging and frequency hopping mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.



7.7.3 Test Setup Diagram

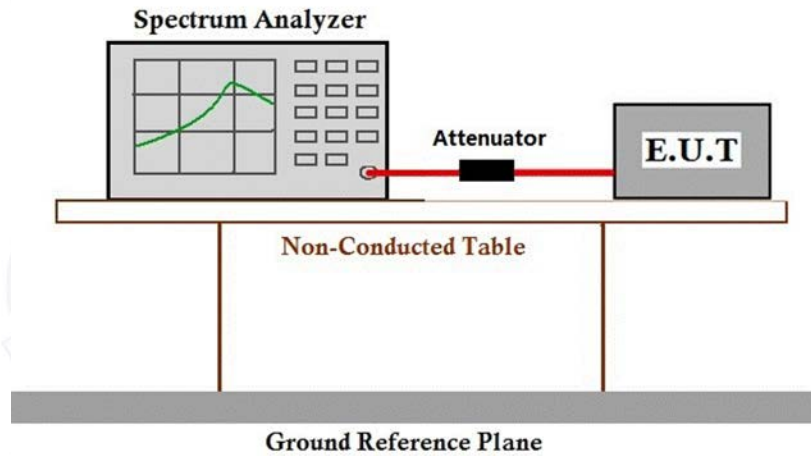

7.7.4 Measurement Procedure and Data

cable loss=0.9dB

Please Refer to Appendix for Details



7.8 Conducted Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)

Test Method: ANSI C63.10 (2013) Section 7.8.8

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.8.1 E.U.T. Operation


Operating Environment:

Temperature: 20.5 °C Humidity: 50.0 % RH Atmospheric Pressure: 1010 mbar

7.8.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Pre-scan	25	TX_non-Hop mode_Keep the EUT in continuously transmitting mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.
Final test	26	Charge + TX_non-Hop mode_Keep the EUT in charging and continuously transmitting mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.8.3 Test Setup Diagram

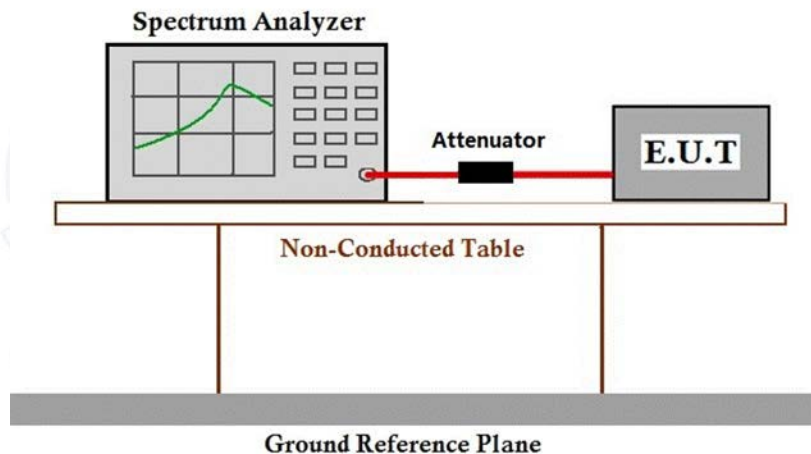

7.8.4 Measurement Procedure and Data

cable loss=0.9dB

Please Refer to Appendix for Details



7.9 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209
 Test Method: ANSI C63.10 (2013) Section 6.10.5
 Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.9.1 E.U.T. Operation


Operating Environment:
 Temperature: 21.4 °C Humidity: 54.3 % RH Atmospheric Pressure: 1010 mbar

7.9.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Pre-scan	25	TX_non-Hop mode_Keep the EUT in continuously transmitting mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.
Final test	26	Charge + TX_non-Hop mode_Keep the EUT in charging and continuously transmitting mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.



7.9.3 Test Setup Diagram

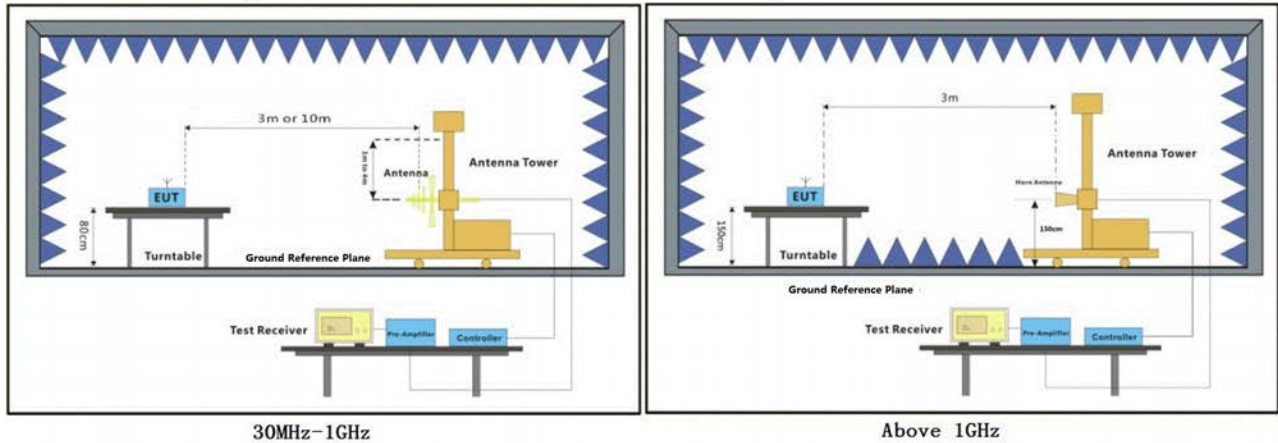

7.9.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

Remark 3: All the modes have been tested and the only shows the worst case GFSK mode



Test Mode: 26; Polarity: Horizontal; Modulation:GFSK; ; Channel:Low

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m)	Limit (dBuv/m)	Margin(dB)	Detector	P/F
1	2310.000	68.09	-30.59	37.50	74.00	-36.50	peak	P
2	2390.000	69.74	-30.49	39.25	74.00	-34.75	peak	P
3	2400.000	79.25	-30.48	48.77	74.00	-25.23	peak	P

Test Mode: 26; Polarity: Vertical; Modulation:GFSK; ; Channel:Low

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m)	Limit (dBuv/m)	Margin(dB)	Detector	P/F
1	2310.000	67.43	-30.59	36.84	74.00	-37.16	peak	P
2	2390.000	68.92	-30.49	38.43	74.00	-35.57	peak	P
3	2400.000	78.71	-30.48	48.23	74.00	-25.77	peak	P

Test Mode: 26; Polarity: Horizontal; Modulation:GFSK; ; Channel:High

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m)	Limit (dBuv/m)	Margin(dB)	Detector	P/F
1	2483.500	79.43	-30.39	49.04	74.00	-24.96	peak	P
2	2500.000	71.32	-30.37	40.95	74.00	-33.05	peak	P

Test Mode: 26; Polarity: Vertical; Modulation:GFSK; ; Channel:High

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m)	Limit (dBuv/m)	Margin(dB)	Detector	P/F
1	2483.500	79.54	-30.39	49.15	74.00	-24.85	peak	P
2	2500.000	71.05	-30.37	40.68	74.00	-33.32	peak	P



7.10 Radiated Spurious Emissions (Below 1GHz)

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209
Test Method: ANSI C63.10 (2013) Section 6.4,6.5,6.6
Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.10.1 E.U.T. Operation


Operating Environment:
Temperature: 25.5 °C Humidity: 68.6 % RH Atmospheric Pressure: 1010 mbar

7.10.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Pre-scan	25	TX_non-Hop mode_Keep the EUT in continuously transmitting mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.
Final test	26	Charge + TX_non-Hop mode_Keep the EUT in charging and continuously transmitting mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.



7.10.3 Test Setup Diagram

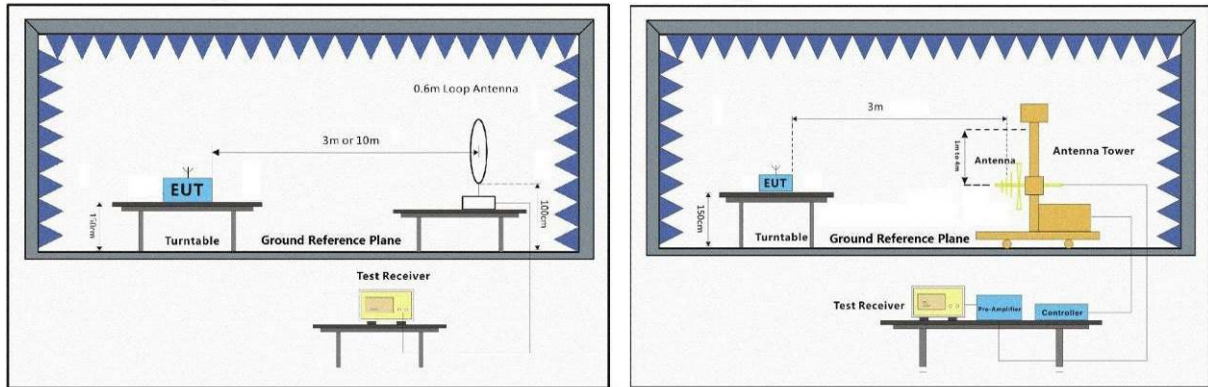

7.10.4 Measurement Procedure and Data


- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- Test the EUT in the lowest channel, the middle channel, the Highest channel.
- The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- Repeat above procedures until all frequencies measured was complete.

Remark:

- Through pre-scan found the worst case is the lowest channel. Only the worst case is recorded in the report.
- The field strength is calculated by adding the Antenna Factor, Cable Factor & Pre-amplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Pre-amplifier Factor
- Scan from 9kHz to 1 GHz, the disturbance below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- All the modes have been tested and the only shows the worst case GFSK mode



Test Mode: 26; Polarity: Horizontal; Modulation:GFSK; ; Channel:Low

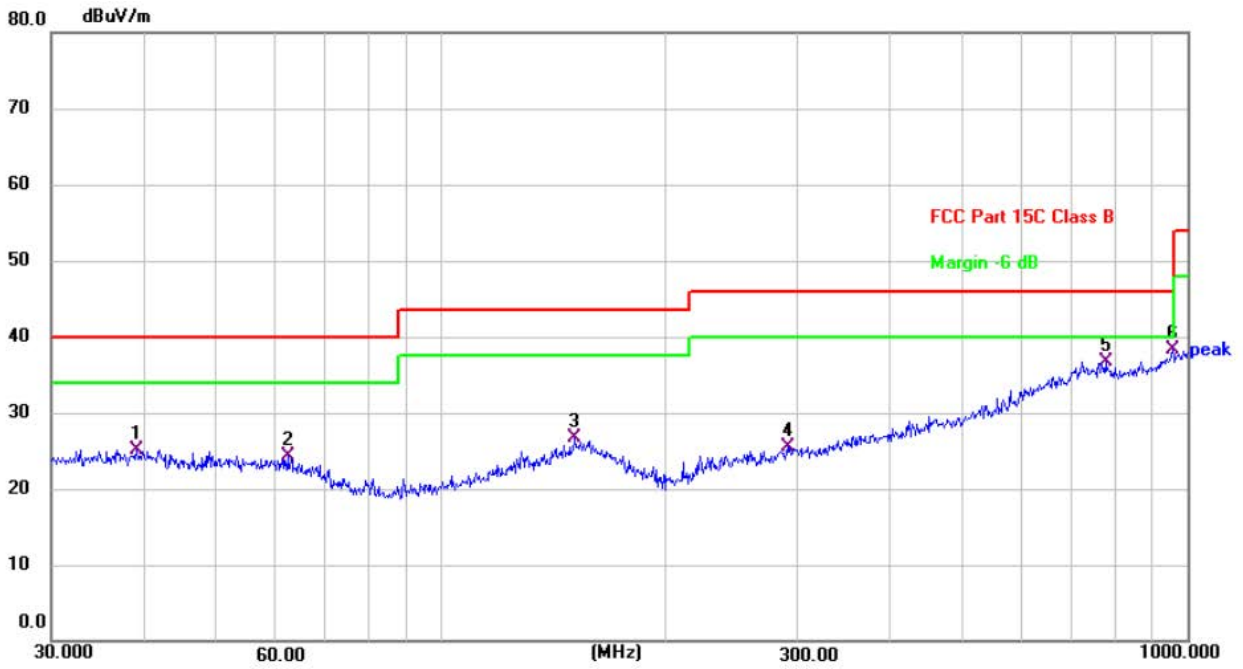


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	39.0244	42.12	-17.00	25.12	40.00	-14.88	QP	100	347	P	
2	62.2128	42.63	-18.40	24.23	40.00	-15.77	QP	100	137	P	
3	151.0665	43.60	-16.85	26.75	43.50	-16.75	QP	199	74	P	
4	291.0360	43.55	-18.01	25.54	46.00	-20.46	QP	199	49	P	
5	776.8778	45.23	-8.43	36.80	46.00	-9.20	QP	199	360	P	
6 *	955.4381	45.21	-6.91	38.30	46.00	-7.70	QP	199	360	P	

Note: Level =Read Level+Factor



Test Mode: 26; Polarity: Vertical; Modulation:GFSK; ; Channel:Low

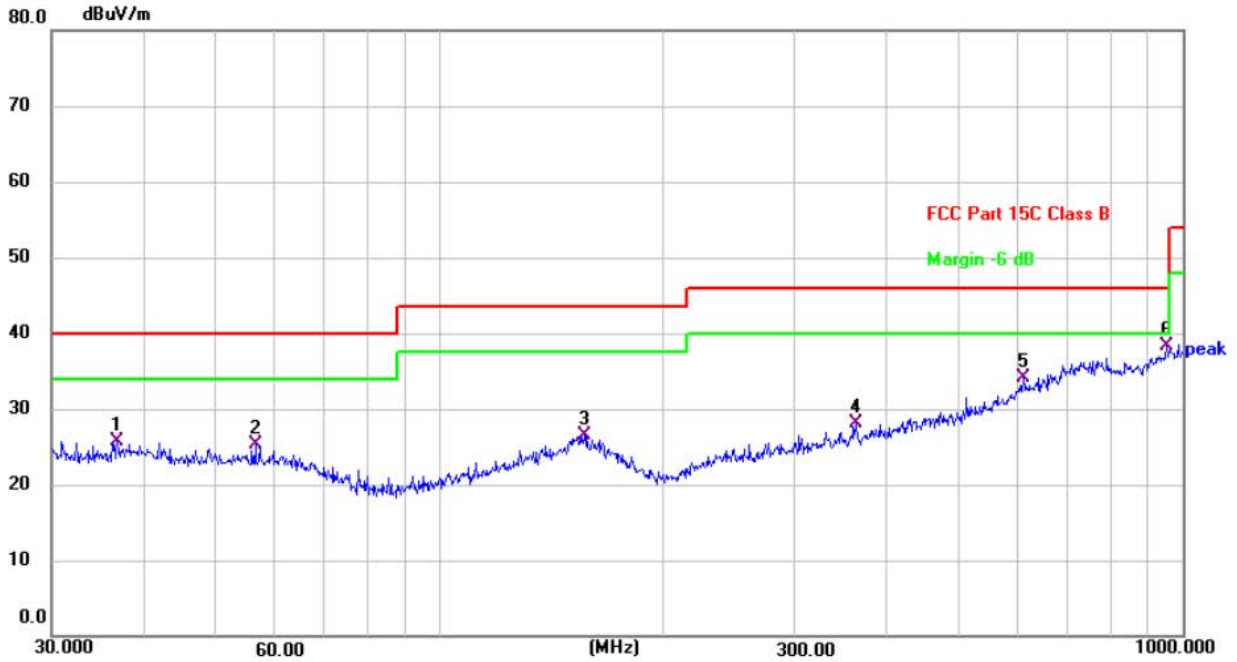

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	36.7662	42.88	-17.26	25.62	40.00	-14.38	QP	300	35	P	
2	56.3948	43.25	-17.98	25.27	40.00	-14.73	QP	300	12	P	
3	156.4578	43.74	-17.20	26.54	43.50	-16.96	QP	200	347	P	
4	362.9844	44.14	-16.10	28.04	46.00	-17.96	QP	200	347	P	
5	609.9217	45.48	-11.36	34.12	46.00	-11.88	QP	300	307	P	
6 *	952.0937	45.28	-6.93	38.35	46.00	-7.65	QP	200	76	P	

Note: Level =Read Level+Factor



7.11 Radiated Spurious Emissions (Above 1GHz)

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209
 Test Method: ANSI C63.10 (2013) Section 6.4,6.5,6.6
 Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.


7.11.1 E.U.T. Operation

Operating Environment:
 Temperature: 21.4 °C Humidity: 54.3 % RH Atmospheric Pressure: 1010 mbar

7.11.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Pre-scan	25	TX_non-Hop mode_Keep the EUT in continuously transmitting mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.
Final test	26	Charge + TX_non-Hop mode_Keep the EUT in charging and continuously transmitting mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.11.3 Test Setup Diagram

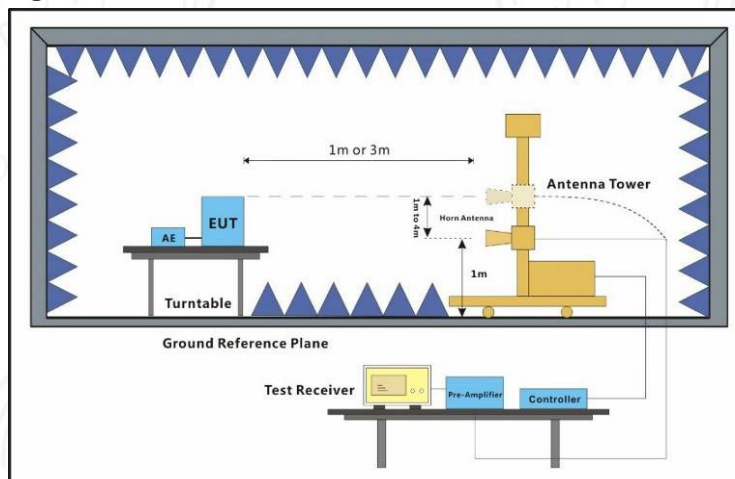

7.11.4 Measurement Procedure and Data

- a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor

2) Scan from 1GHz to 25GHz, the disturbance above 18GHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

3) The field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

4) All the modes have been tested and the only shows the worst case GFSK mode



Test Mode: 26; Polarity: Horizontal; Modulation:GFSK;Channel:Low

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m)	Limit (dBuv/m)	Margin(dB)	Detector	P/F
1	2915.548	68.83	-29.46	39.37	74.00	-34.63	peak	P
2	4276.448	68.49	-28.65	39.84	74.00	-34.16	peak	P
3	6085.433	65.78	-25.20	40.58	74.00	-33.42	peak	P
4	8646.187	70.33	-24.99	45.34	74.00	-28.66	peak	P
5	11046.570	68.86	-22.82	46.03	74.00	-27.97	peak	P
6	14218.043	70.29	-22.04	48.25	74.00	-25.75	peak	P

Test Mode: 26; Polarity: Vertical; Modulation:GFSK;Channel:Low

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m)	Limit (dBuv/m)	Margin(dB)	Detector	P/F
1	2972.669	67.41	-29.72	37.69	74.00	-36.31	peak	P
2	4313.021	69.10	-29.74	39.37	74.00	-34.63	peak	P
3	6353.388	66.50	-26.03	40.47	74.00	-33.53	peak	P
4	8576.270	70.65	-25.53	45.12	74.00	-28.88	peak	P
5	11285.901	67.49	-22.35	45.14	74.00	-28.86	peak	P
6	14955.792	71.07	-20.30	50.77	74.00	-23.23	peak	P

Test Mode: 26; Polarity: Horizontal; Modulation:GFSK;Channel:middle

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m)	Limit (dBuv/m)	Margin(dB)	Detector	P/F
1	2914.716	69.63	-30.05	39.58	74.00	-34.42	peak	P
2	4277.434	69.00	-29.45	39.54	74.00	-34.46	peak	P
3	6085.046	65.58	-25.77	39.82	74.00	-34.18	peak	P
4	8646.116	69.11	-25.71	43.41	74.00	-30.59	peak	P
5	11048.024	68.18	-23.80	44.38	74.00	-29.62	peak	P
6	14218.580	70.43	-20.27	50.17	74.00	-23.83	peak	P

Test Mode: 26; Polarity: Vertical; Modulation:GFSK;Channel:middle

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m)	Limit (dBuv/m)	Margin(dB)	Detector	P/F
1	2973.261	66.71	-29.12	37.59	74.00	-36.41	peak	P
2	4312.340	69.74	-29.67	40.07	74.00	-33.93	peak	P
3	6353.802	66.49	-24.94	41.55	74.00	-32.45	peak	P
4	8575.456	69.90	-24.47	45.43	74.00	-28.57	peak	P
5	11286.620	68.75	-23.47	45.28	74.00	-28.72	peak	P
6	14955.833	70.64	-19.79	50.85	74.00	-23.15	peak	P



Test Mode: 26; Polarity: Horizontal; Modulation:GFSK; Channel:High

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m)	Limit (dBuv/m)	Margin(dB)	Detector	P/F
1	2913.714	70.44	-28.72	41.72	74.00	-32.28	peak	P
2	4277.464	67.27	-29.33	37.94	74.00	-36.06	peak	P
3	6085.102	65.53	-24.99	40.55	74.00	-33.45	peak	P
4	8645.579	68.91	-25.29	43.62	74.00	-30.38	peak	P
5	11046.478	67.18	-23.36	43.82	74.00	-30.18	peak	P
6	14217.975	71.36	-20.84	50.52	74.00	-23.48	peak	P

Test Mode: 26; Polarity: Vertical; Modulation:GFSK;Channel:High

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m)	Limit (dBuv/m)	Margin(dB)	Detector	P/F
1	2972.567	67.02	-29.58	37.44	74.00	-36.56	peak	P
2	4312.624	69.78	-29.26	40.52	74.00	-33.48	peak	P
3	6354.251	67.01	-25.02	41.99	74.00	-32.01	peak	P
4	8576.739	70.15	-25.08	45.07	74.00	-28.93	peak	P
5	11286.417	67.06	-23.40	43.66	74.00	-30.34	peak	P
6	14955.626	71.98	-19.84	52.14	74.00	-21.86	peak	P



8 Test Setup Photo

Please refer to the Appendix Test Setup Photos

9 EUT Constructional Details (EUT Photos)

Please refer to the Appendix EUT Photos






10 Appendix



Cable loss=0.9 dB



1. Dwell Time (Hopping)



Condition	Antenna	Packet Type	Pulse Time(ms)	Hops	Dwell Time(ms)	Limit(s)	Result
NVNT	ANT1	1-DH1	0.376	320.00	120.320	0.40	Pass
NVNT	ANT1	1-DH3	1.631	160.00	260.960	0.40	Pass
NVNT	ANT1	1-DH5	2.880	107.00	308.160	0.40	Pass
NVNT	ANT1	2-DH1	0.386	320.00	123.520	0.40	Pass
NVNT	ANT1	2-DH3	1.639	152.00	249.128	0.40	Pass
NVNT	ANT1	2-DH5	2.886	99.00	285.714	0.40	Pass
NVNT	ANT1	3-DH1	0.387	320.00	123.840	0.40	Pass
NVNT	ANT1	3-DH3	1.638	164.00	268.632	0.40	Pass
NVNT	ANT1	3-DH5	2.889	113.00	326.457	0.40	Pass


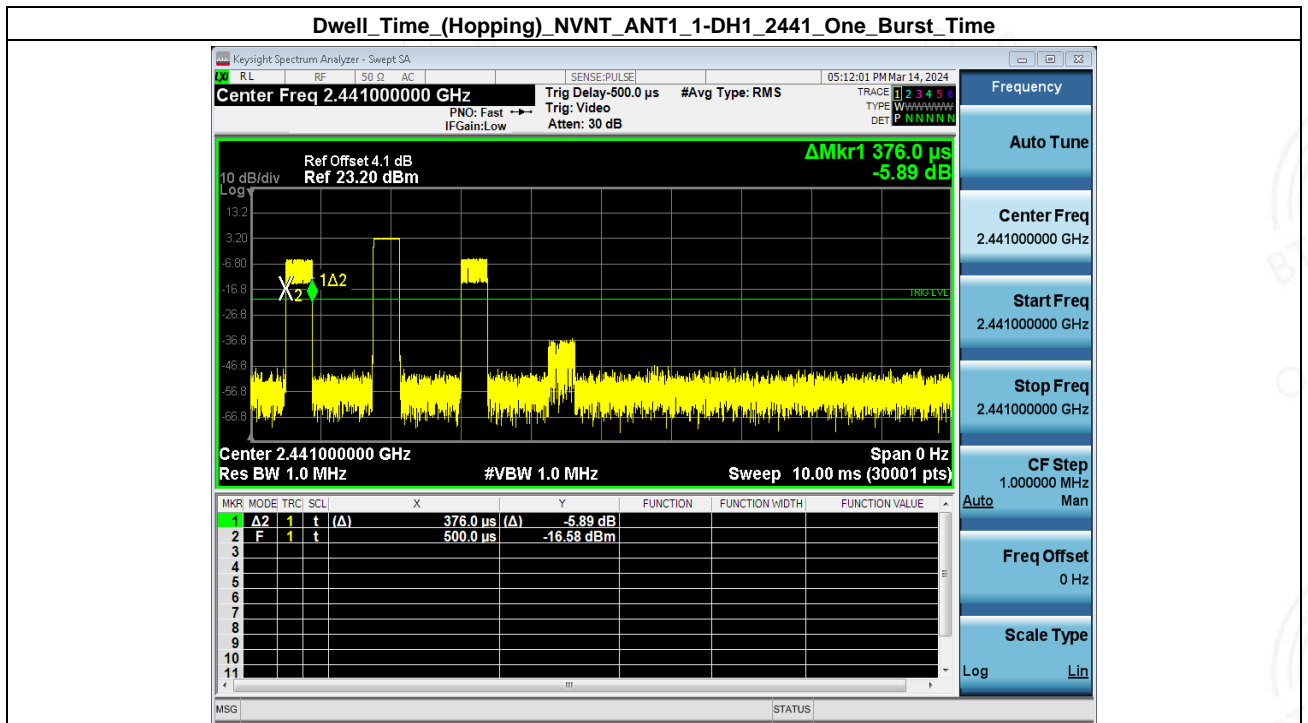


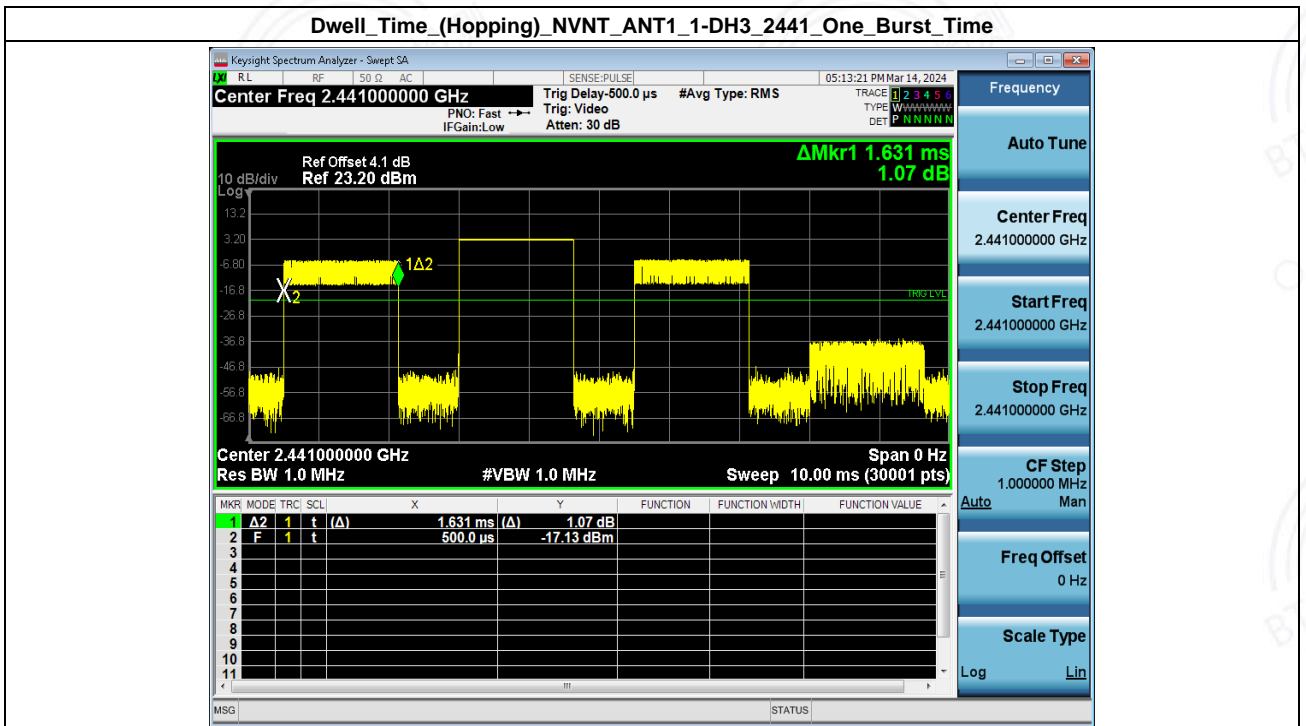
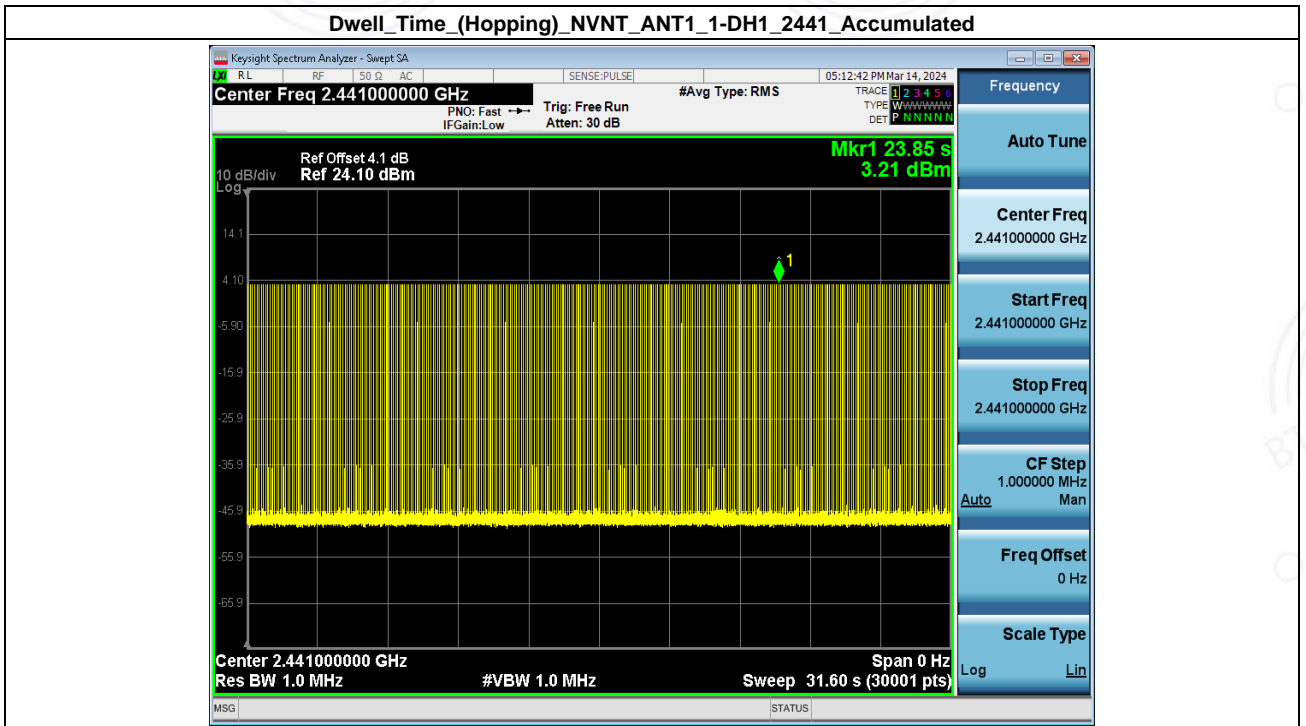


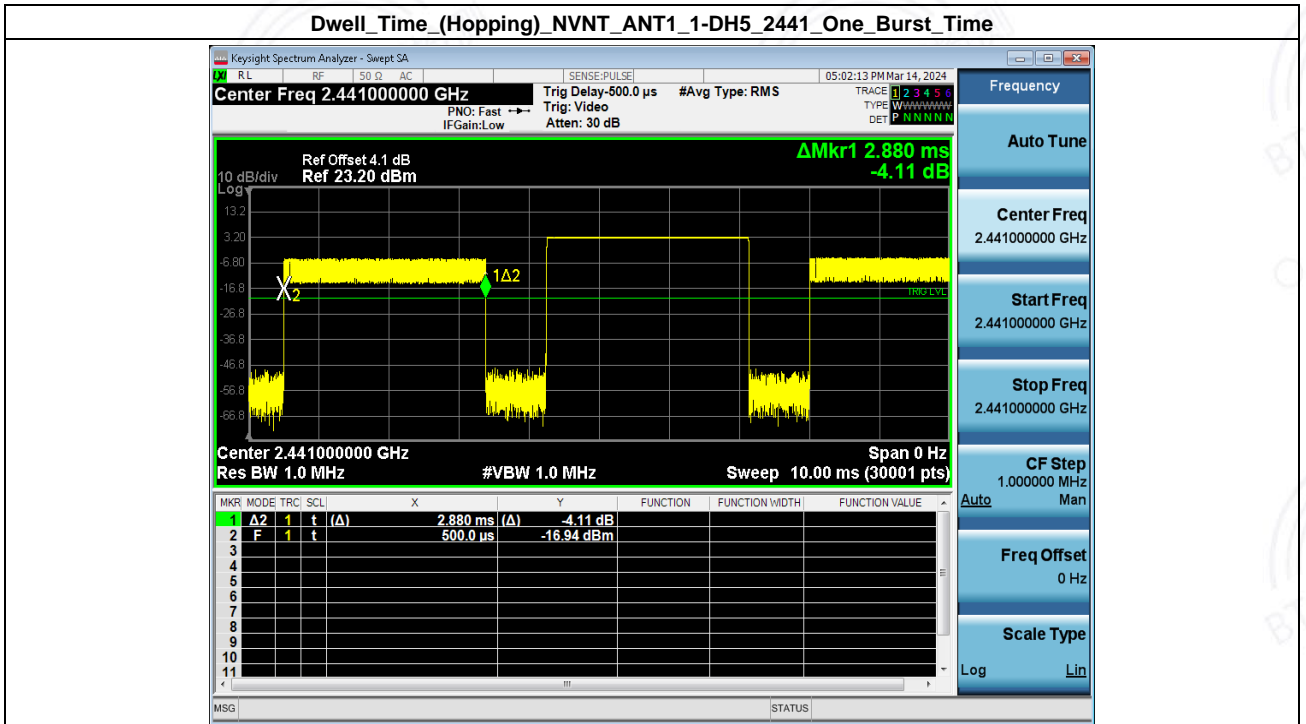
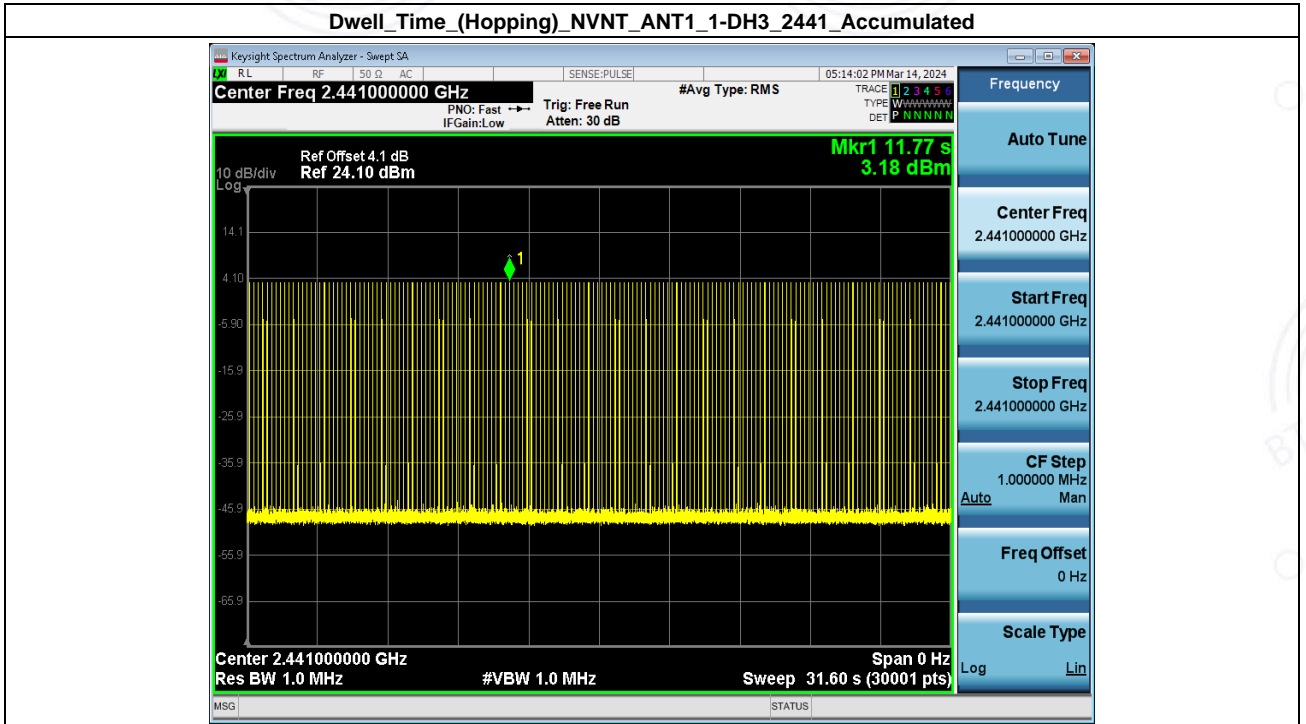


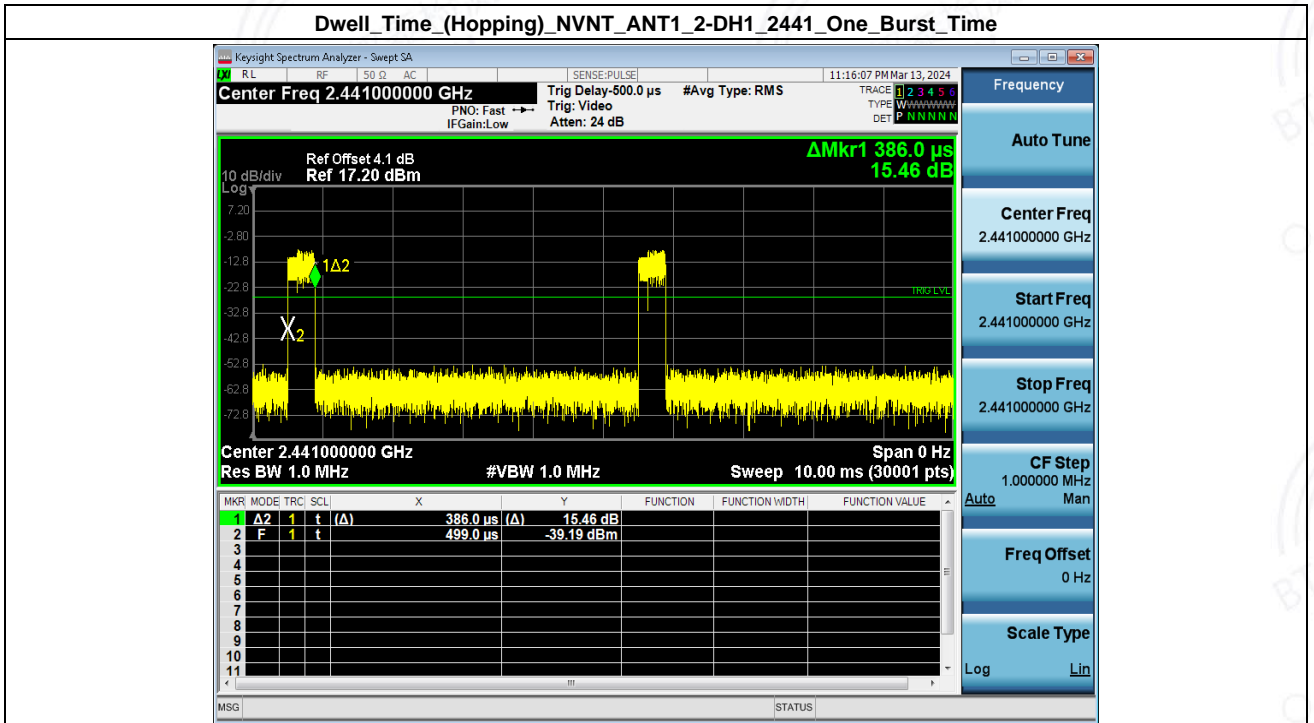
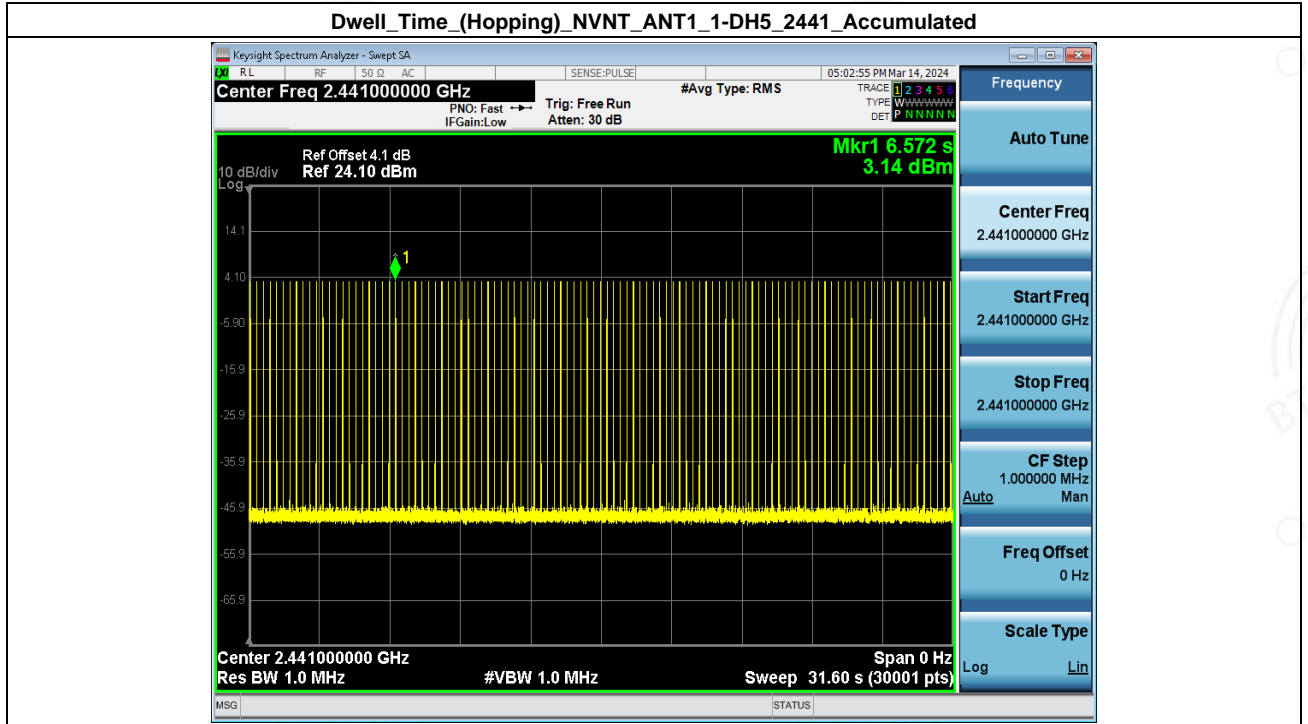


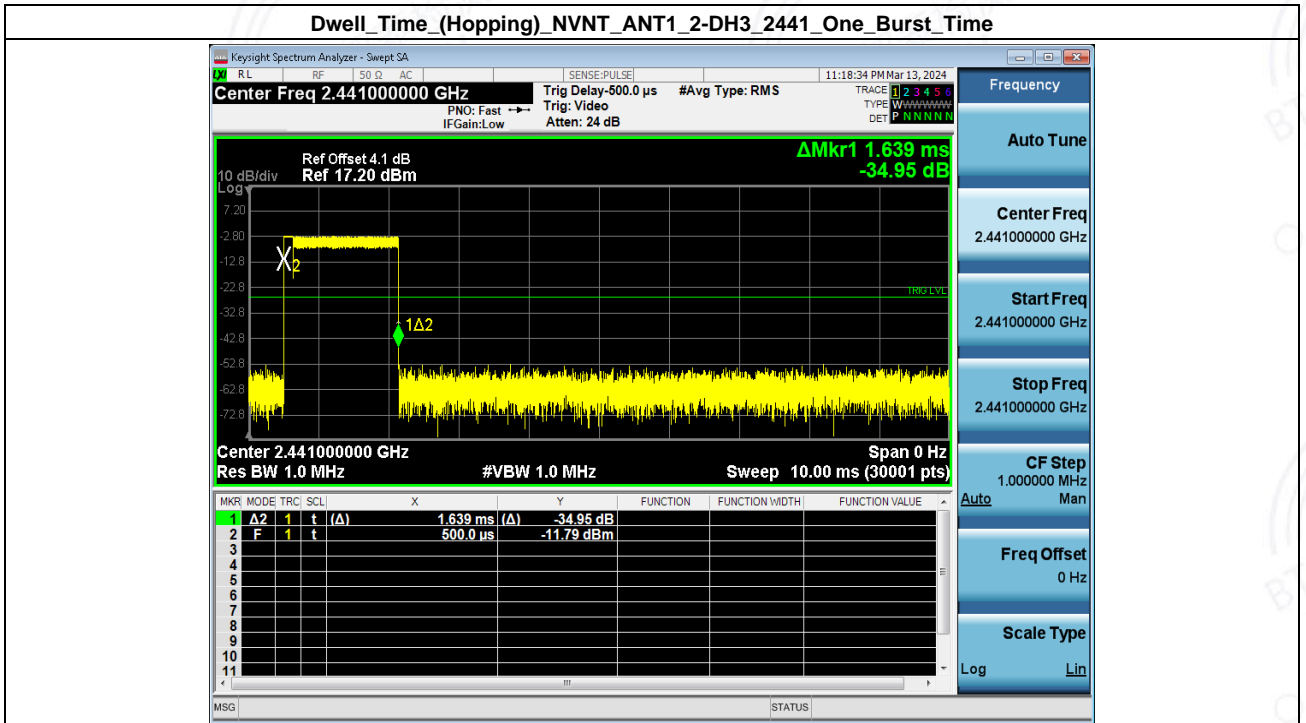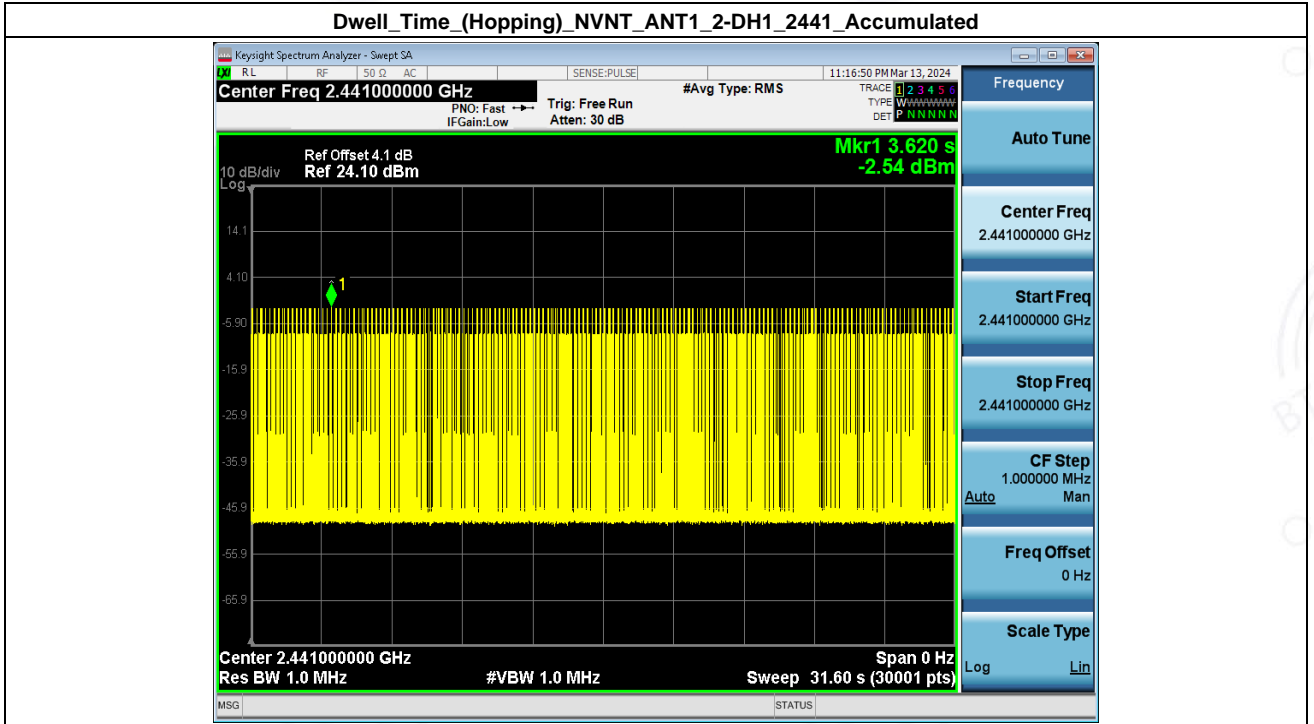


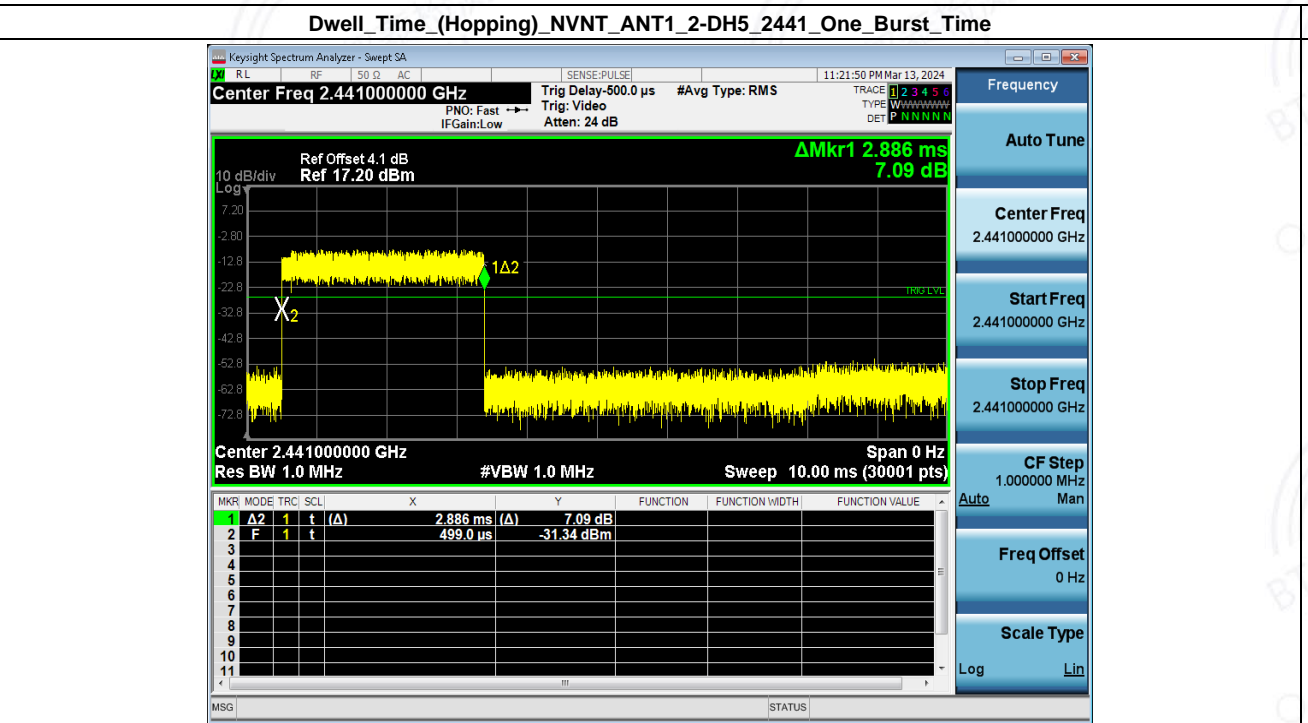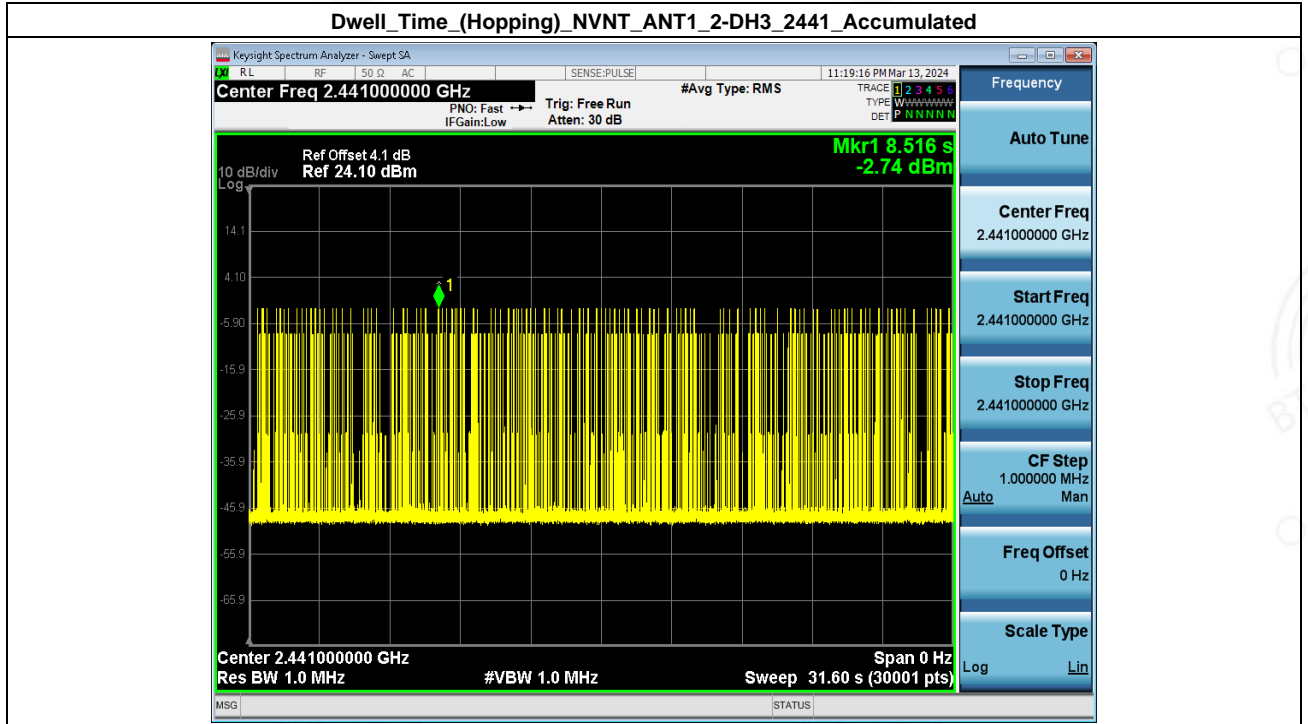

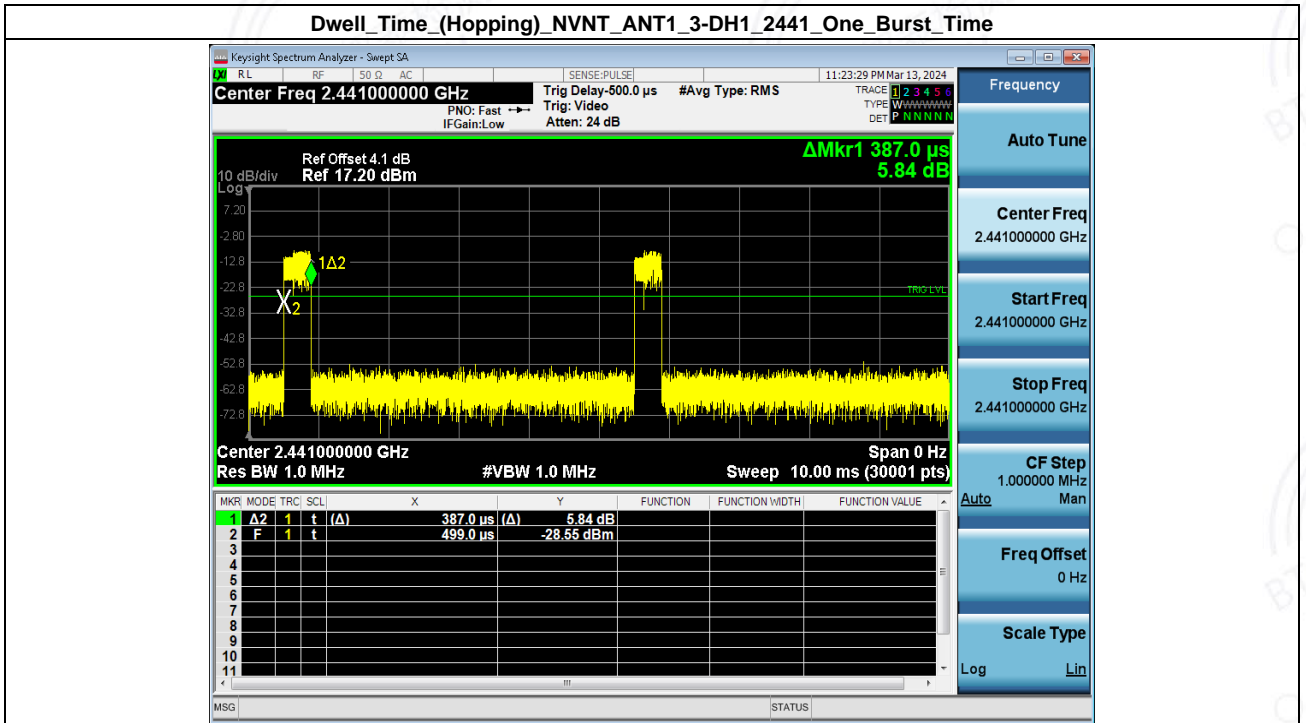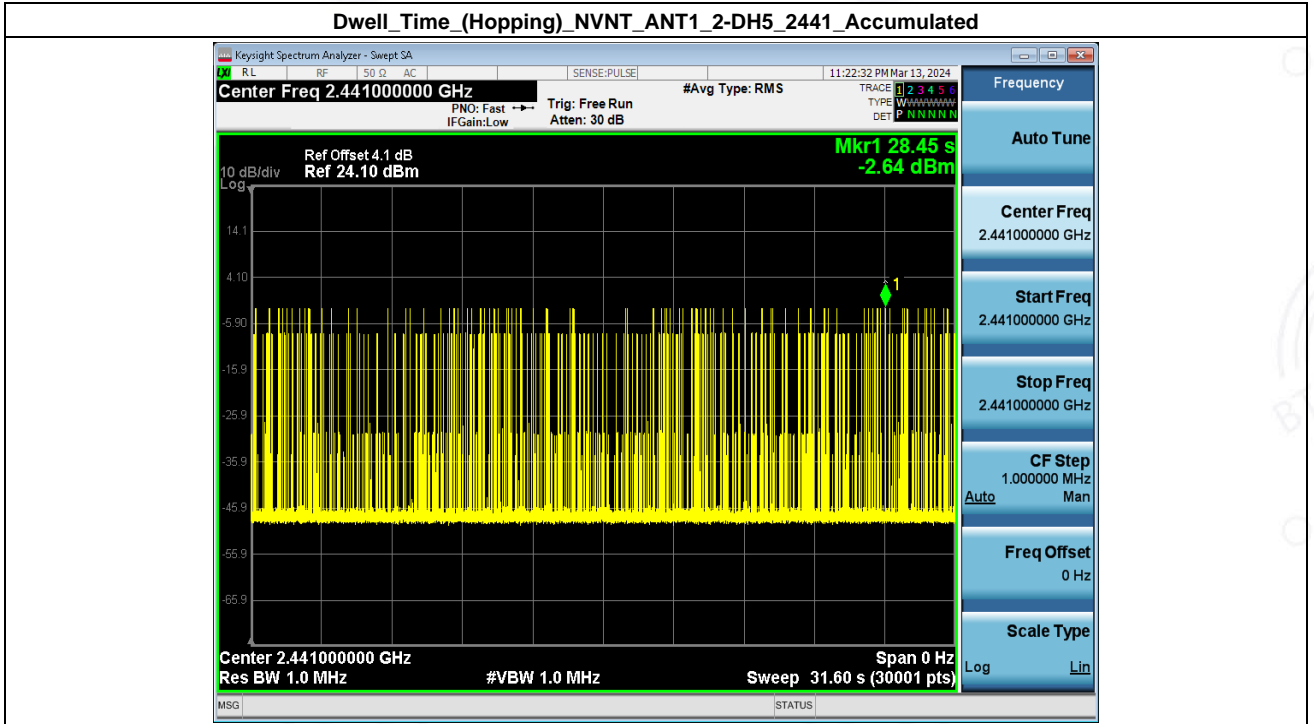

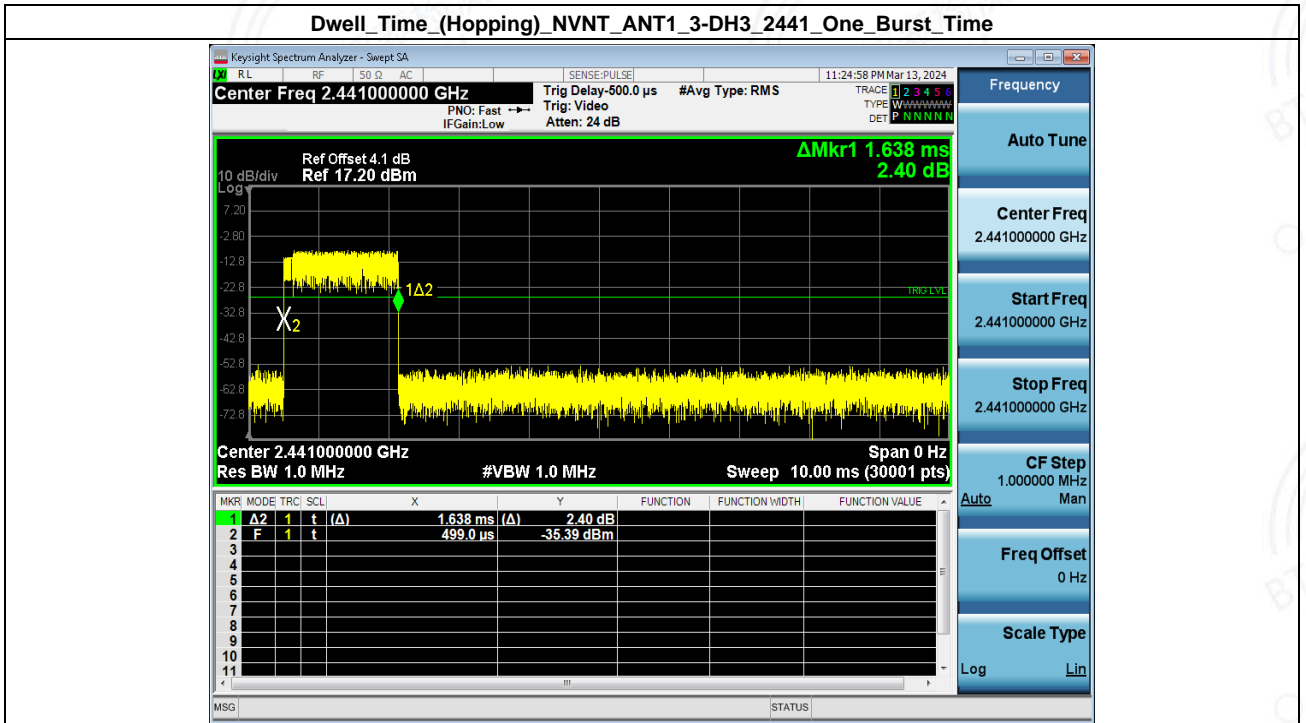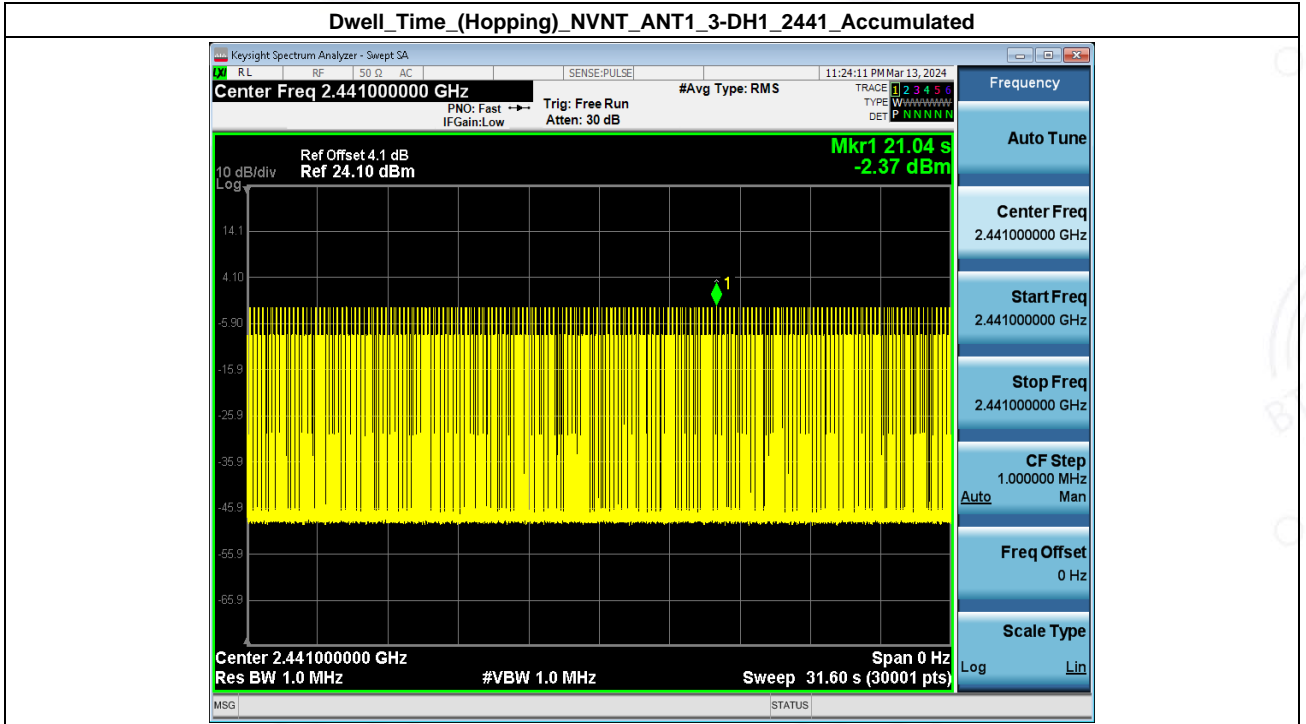


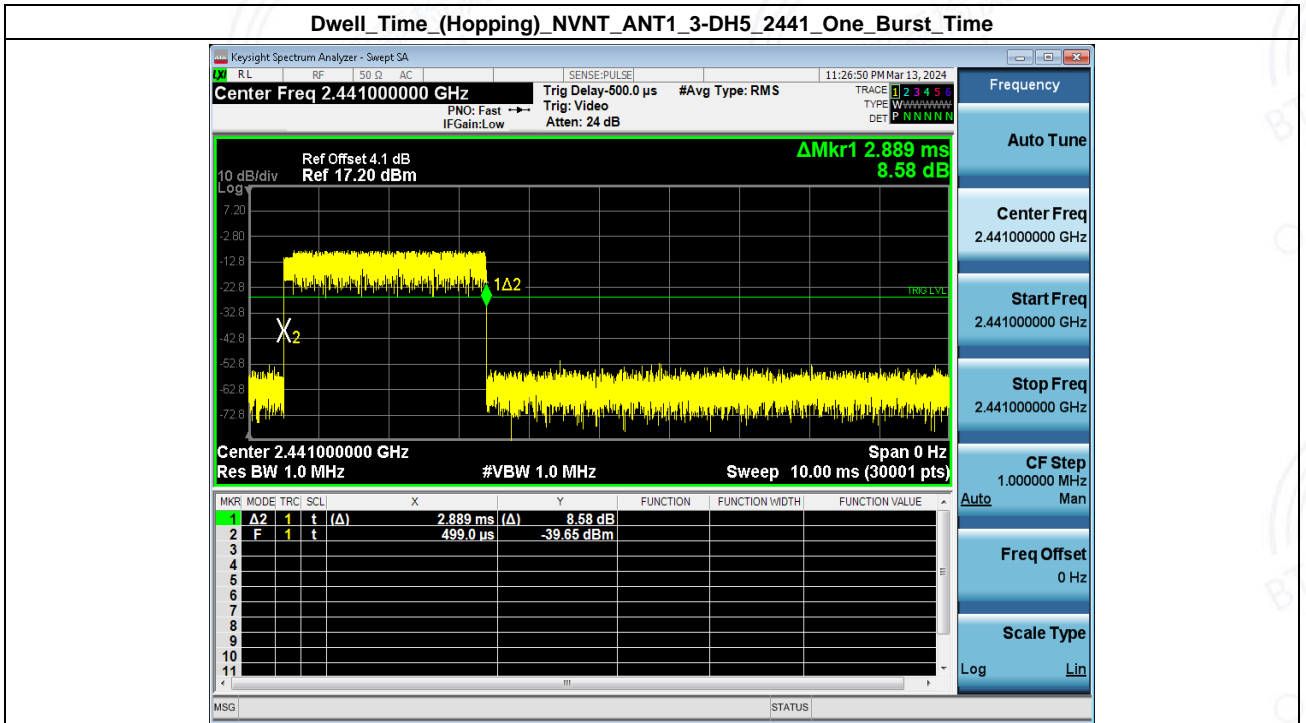
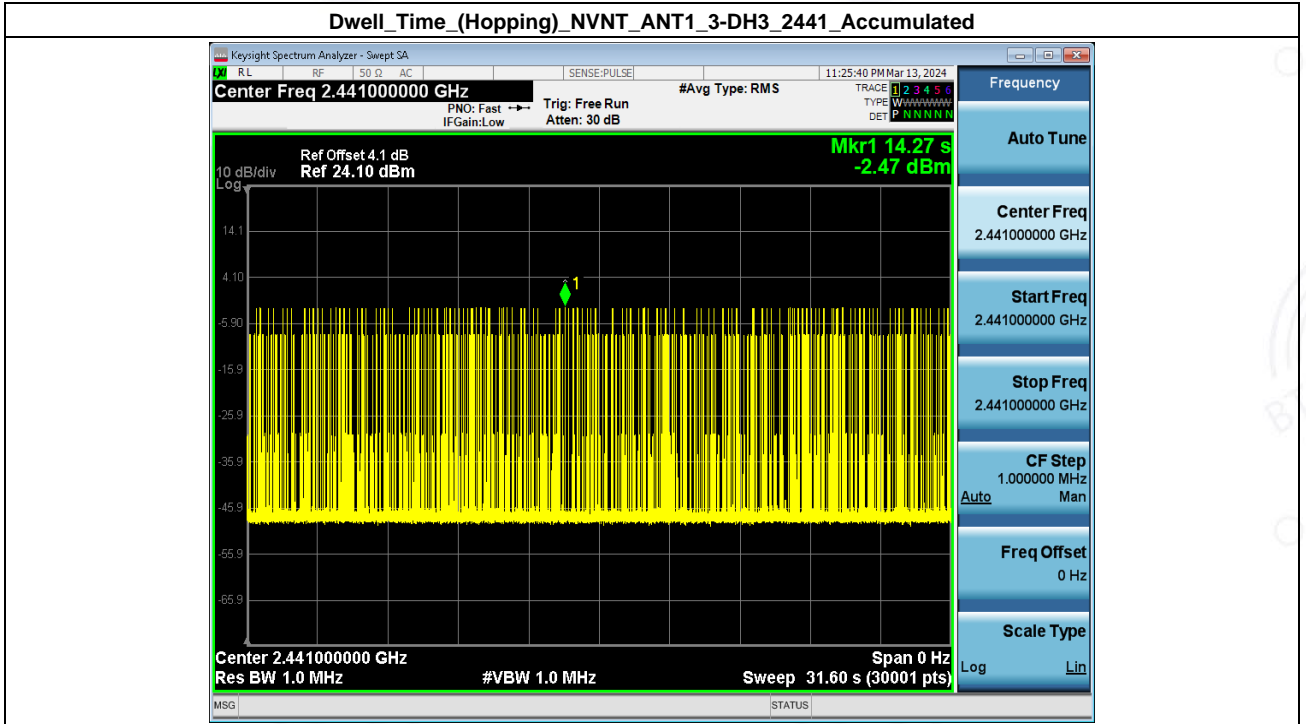



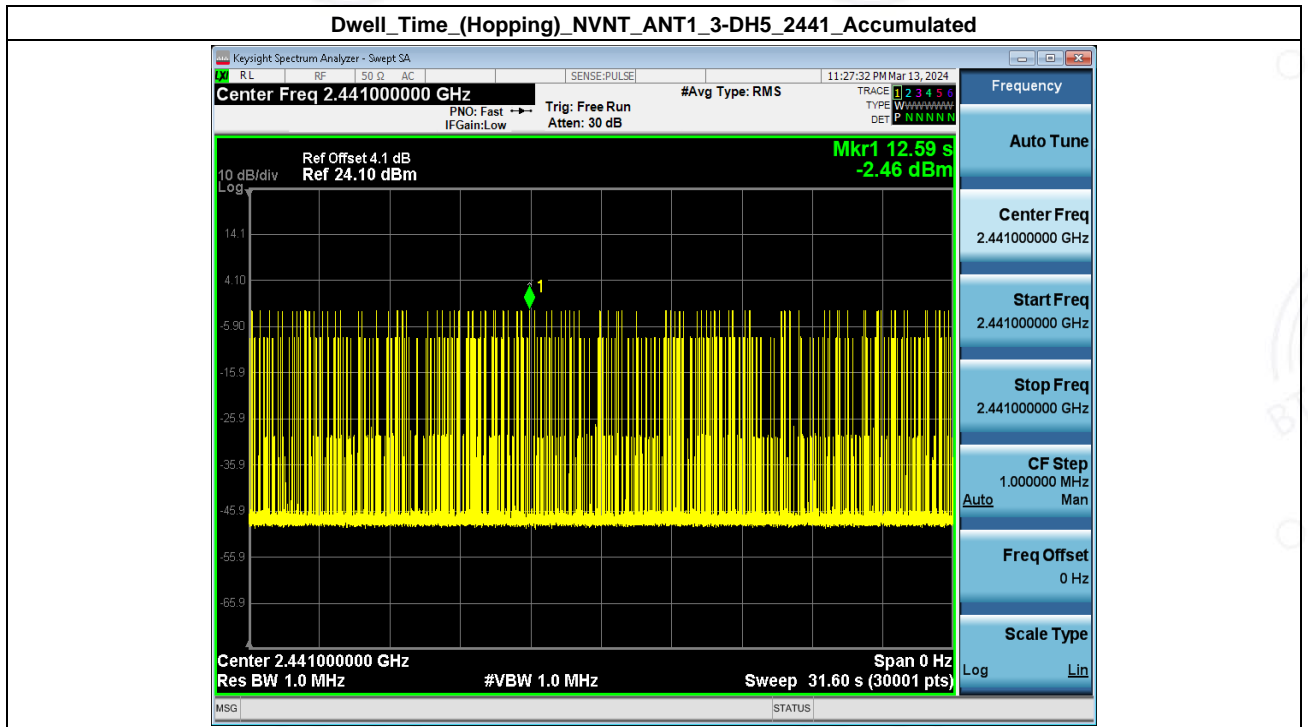




2. -20dB Bandwidth



Condition	Antenna	Modulation	Frequency (MHz)	-20dB BW(MHz)	if larger than CFS
NVNT	ANT1	1-DH5	2402.00	1.022	Yes
NVNT	ANT1	1-DH5	2441.00	1.020	Yes
NVNT	ANT1	1-DH5	2480.00	0.968	No
NVNT	ANT1	2-DH5	2402.00	1.235	Yes
NVNT	ANT1	2-DH5	2441.00	1.265	Yes
NVNT	ANT1	2-DH5	2480.00	1.275	Yes
NVNT	ANT1	3-DH5	2402.00	1.278	Yes
NVNT	ANT1	3-DH5	2441.00	1.284	Yes
NVNT	ANT1	3-DH5	2480.00	1.293	Yes

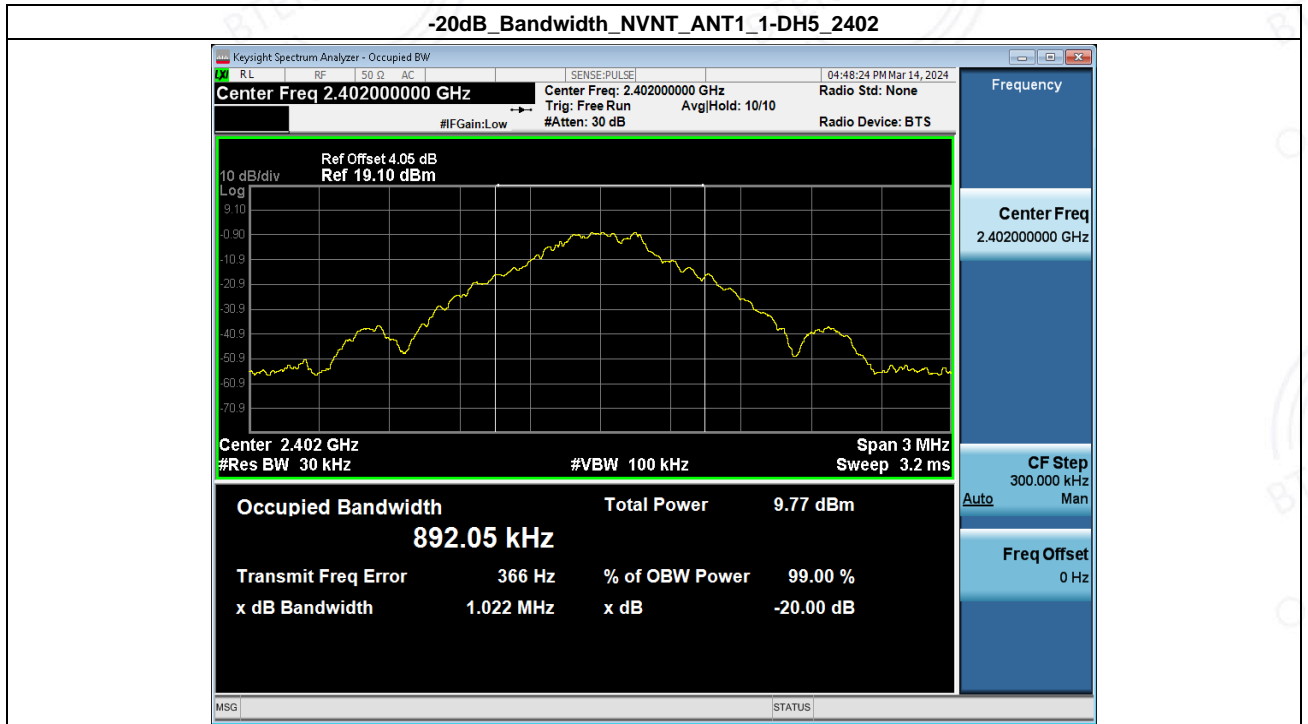

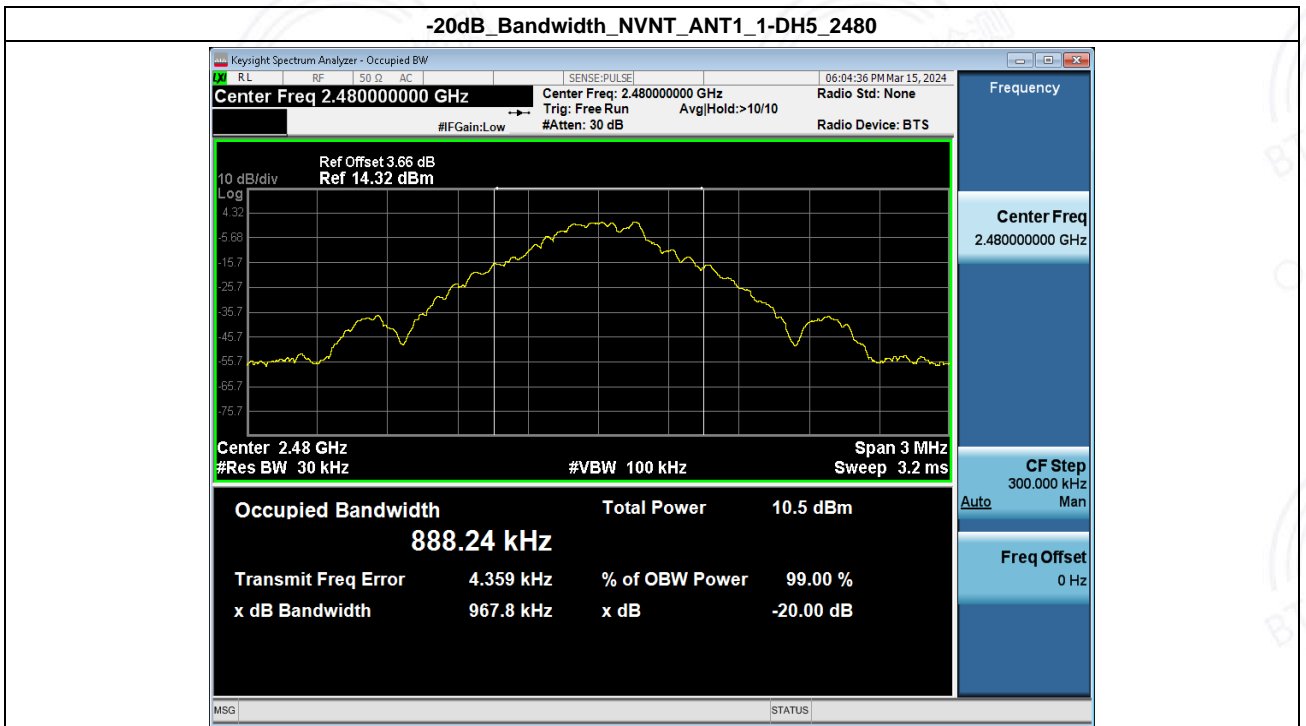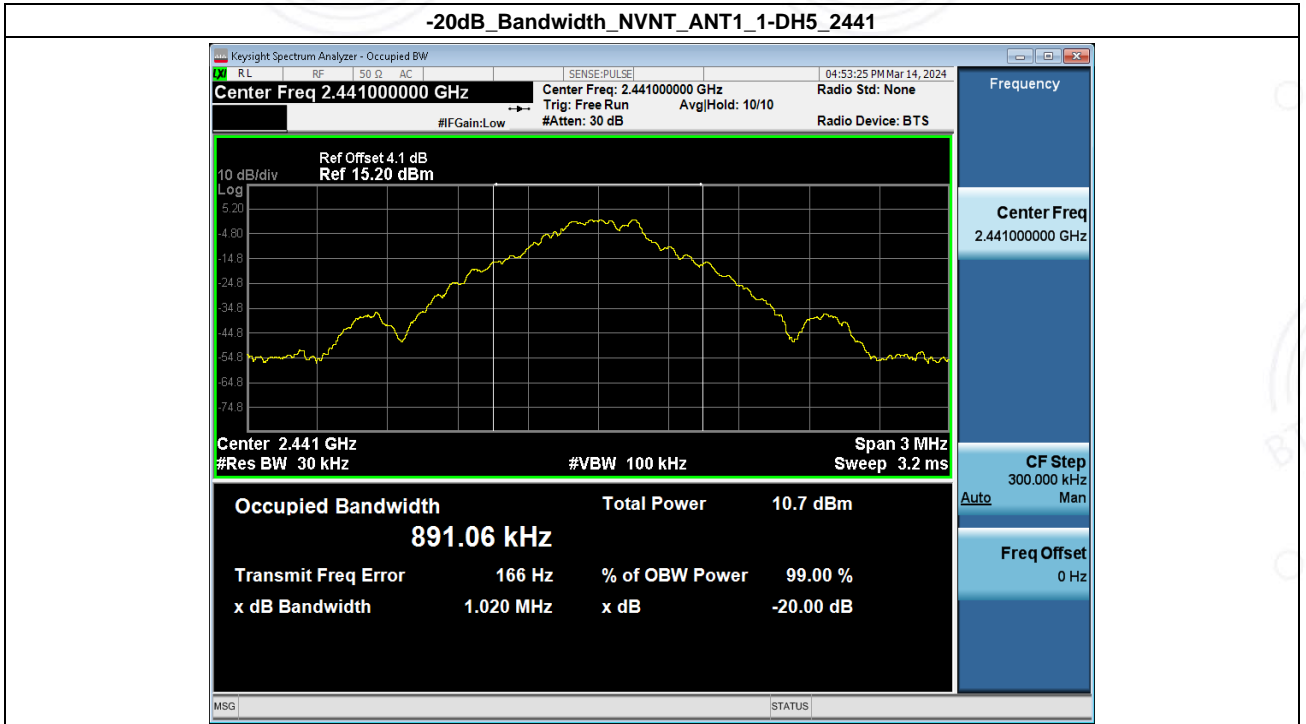

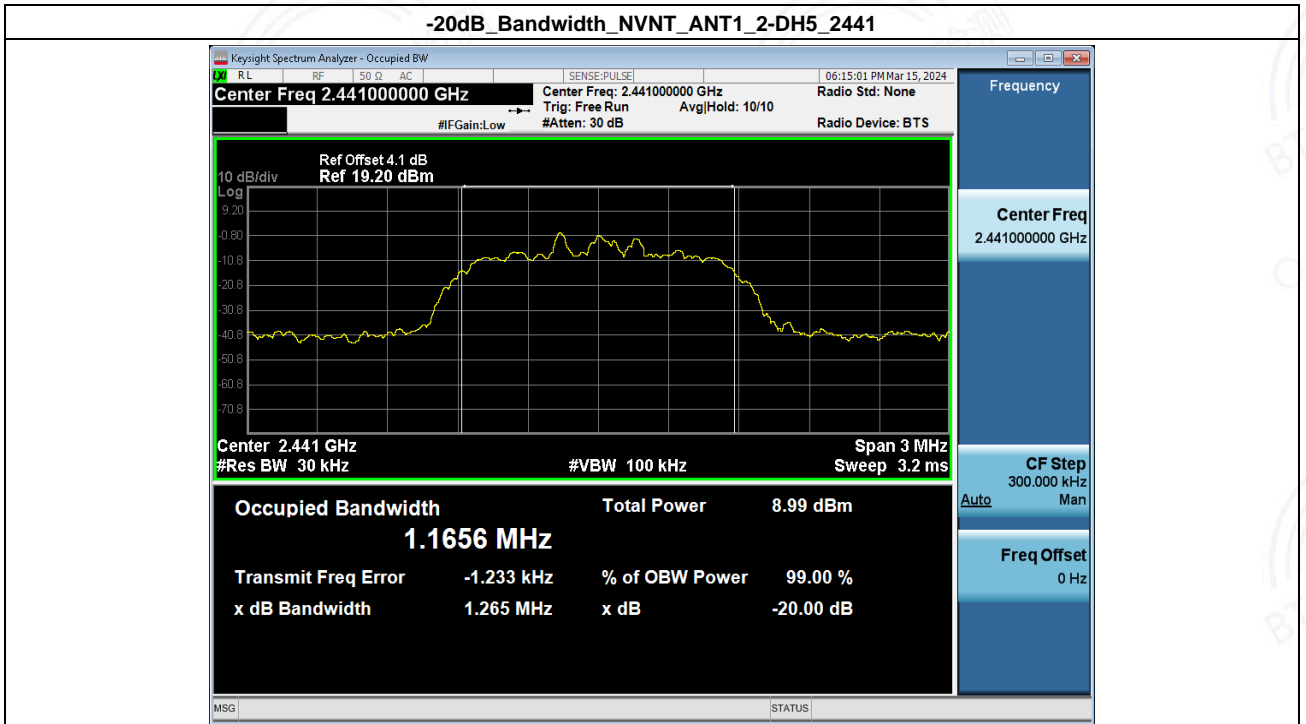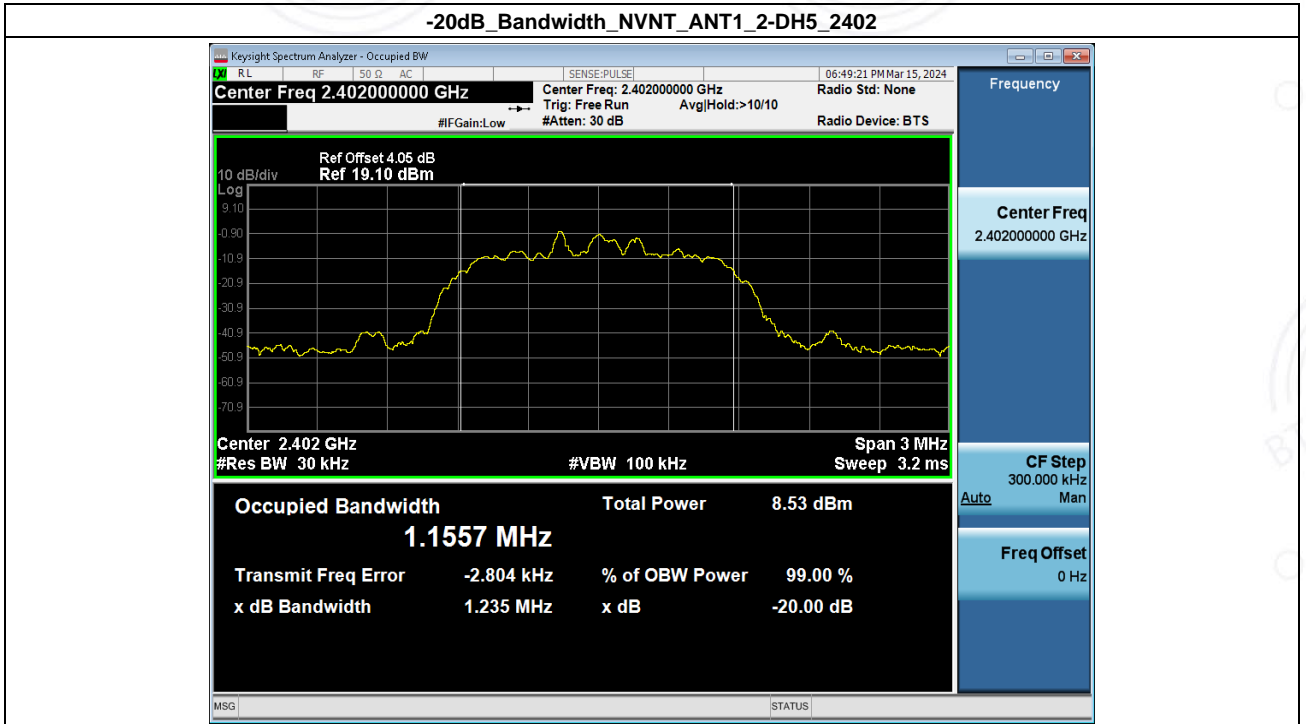


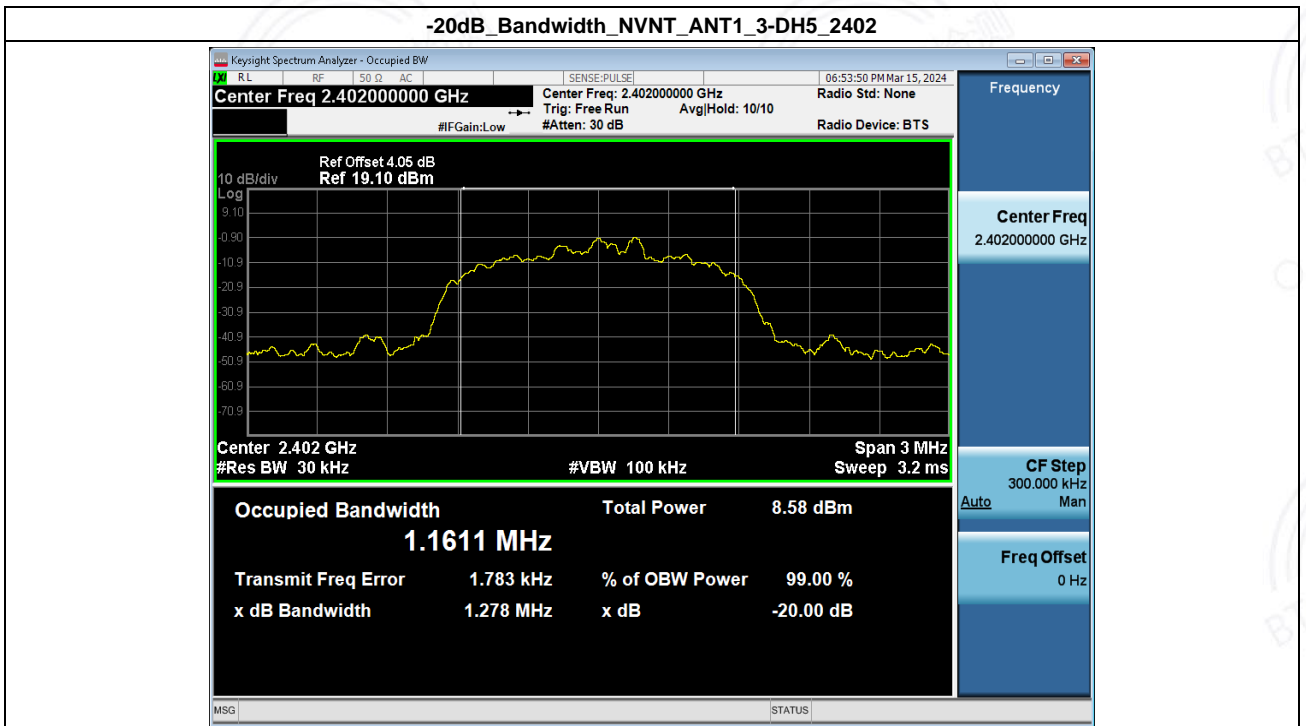
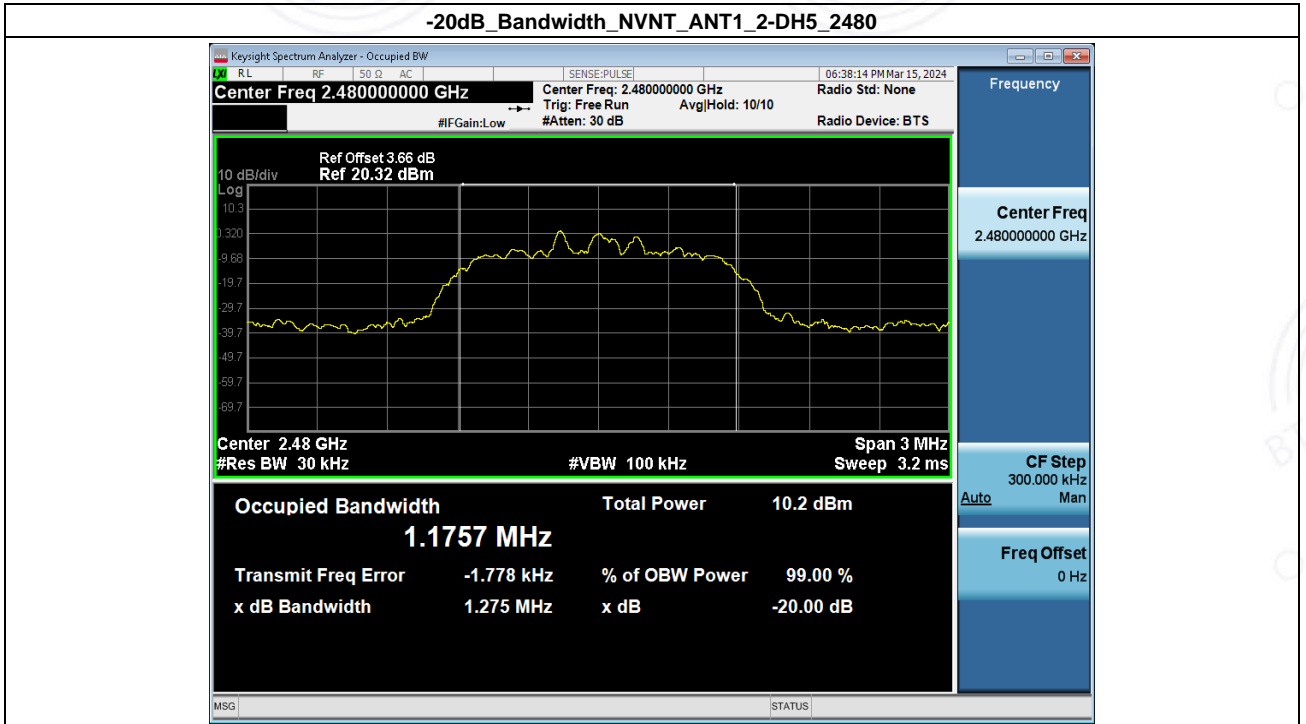


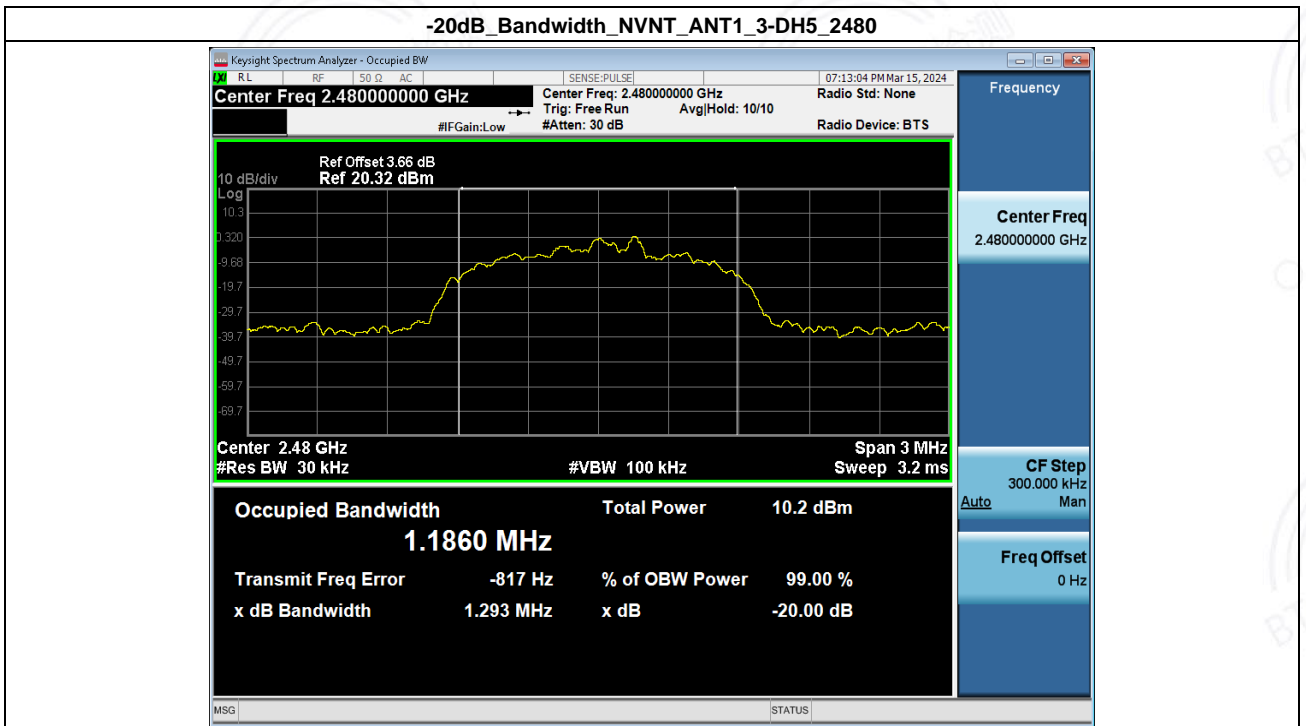
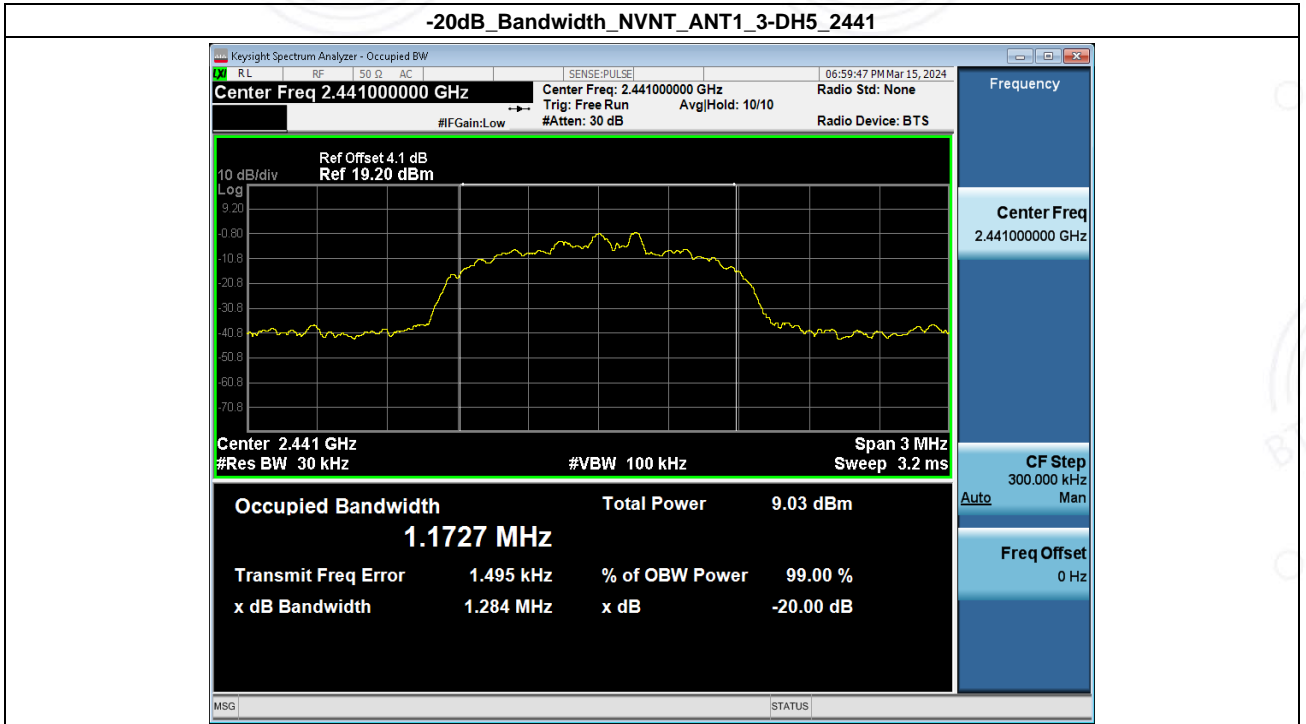




3. 99% Occupied Bandwidth



Condition	Antenna	Modulation	Frequency (MHz)	99%OBW(MHz)
NVNT	ANT1	1-DH5	2402.00	0.895
NVNT	ANT1	1-DH5	2441.00	0.893
NVNT	ANT1	1-DH5	2480.00	0.887
NVNT	ANT1	2-DH5	2402.00	1.157
NVNT	ANT1	2-DH5	2441.00	1.165
NVNT	ANT1	2-DH5	2480.00	1.176
NVNT	ANT1	3-DH5	2402.00	1.161
NVNT	ANT1	3-DH5	2441.00	1.171
NVNT	ANT1	3-DH5	2480.00	1.188

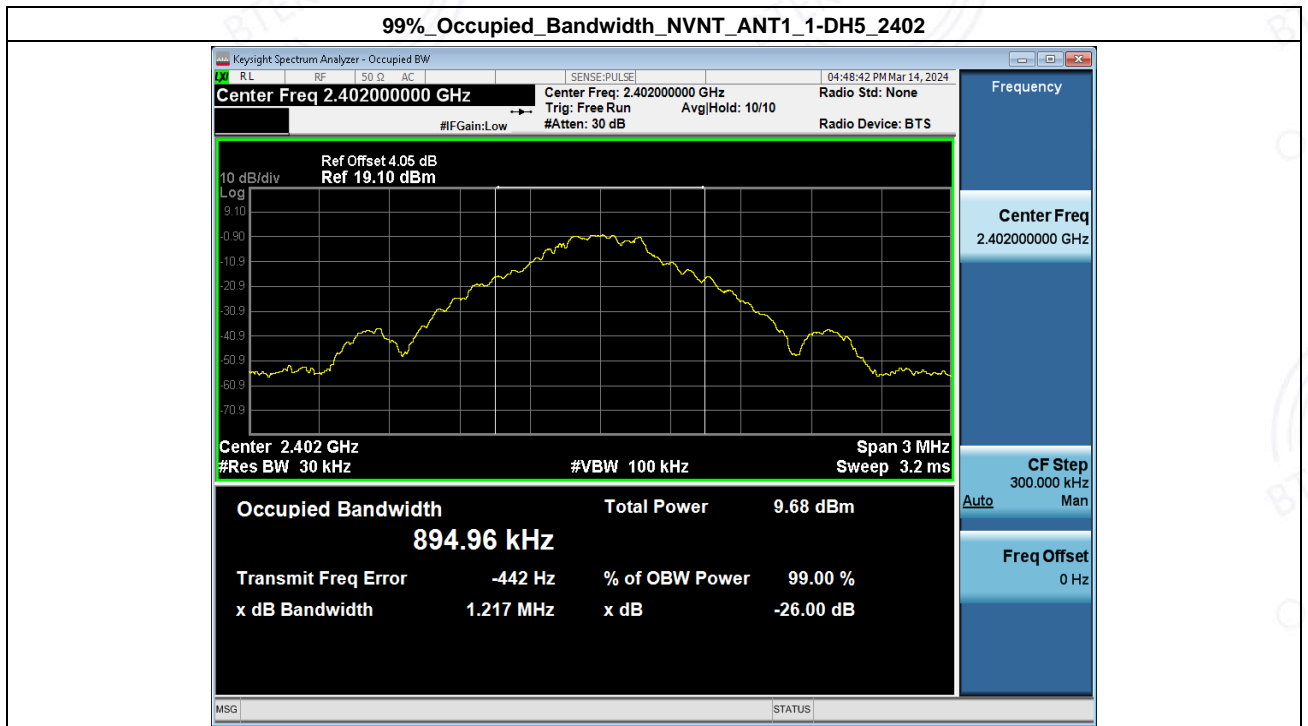

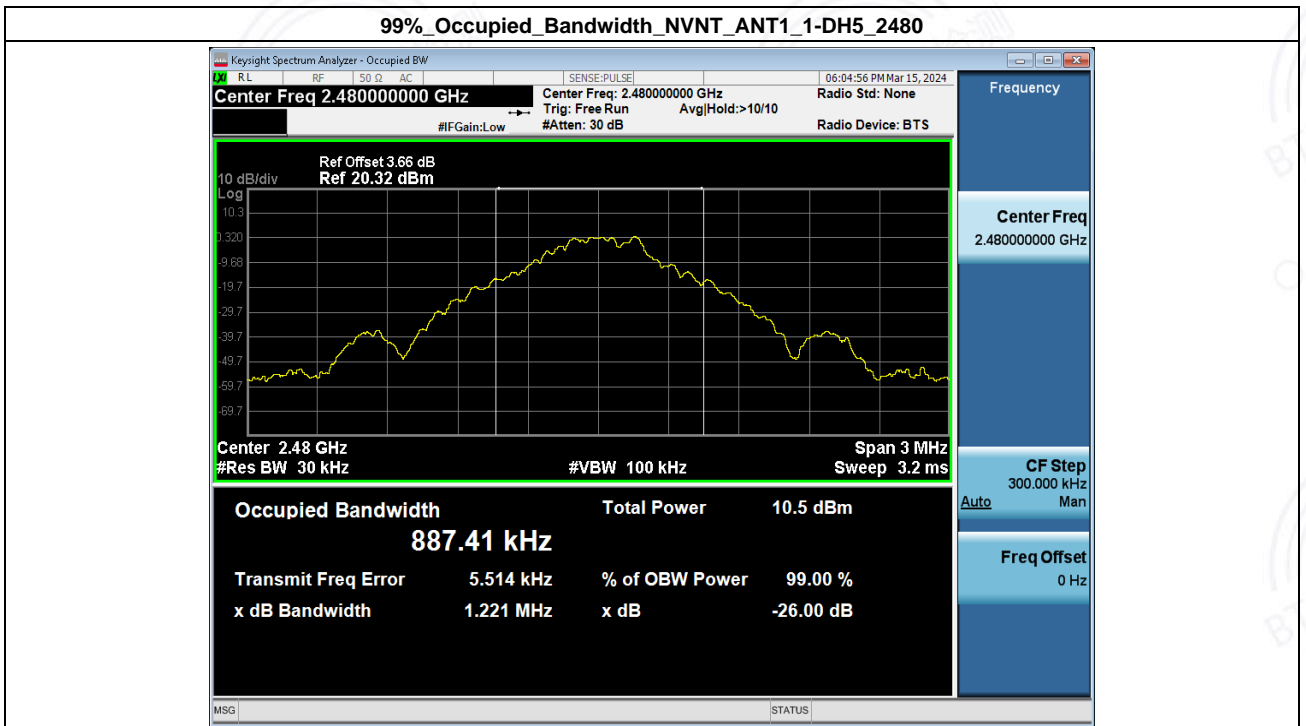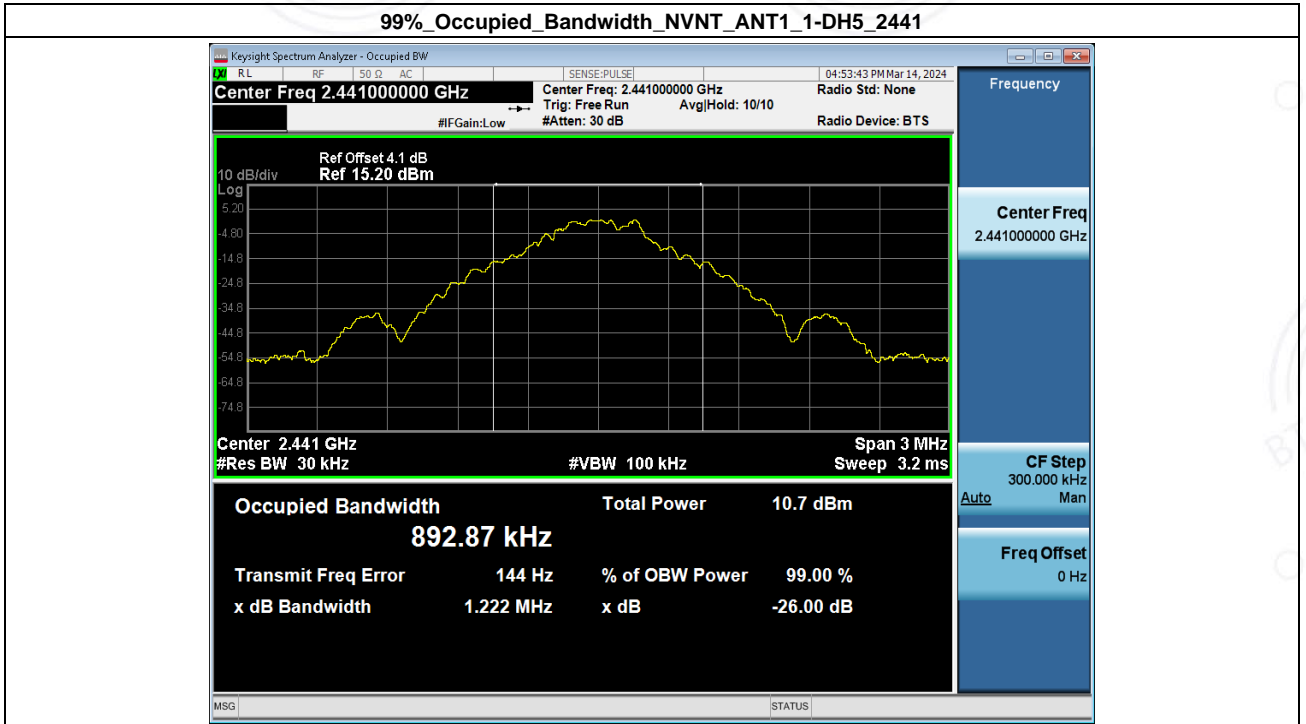

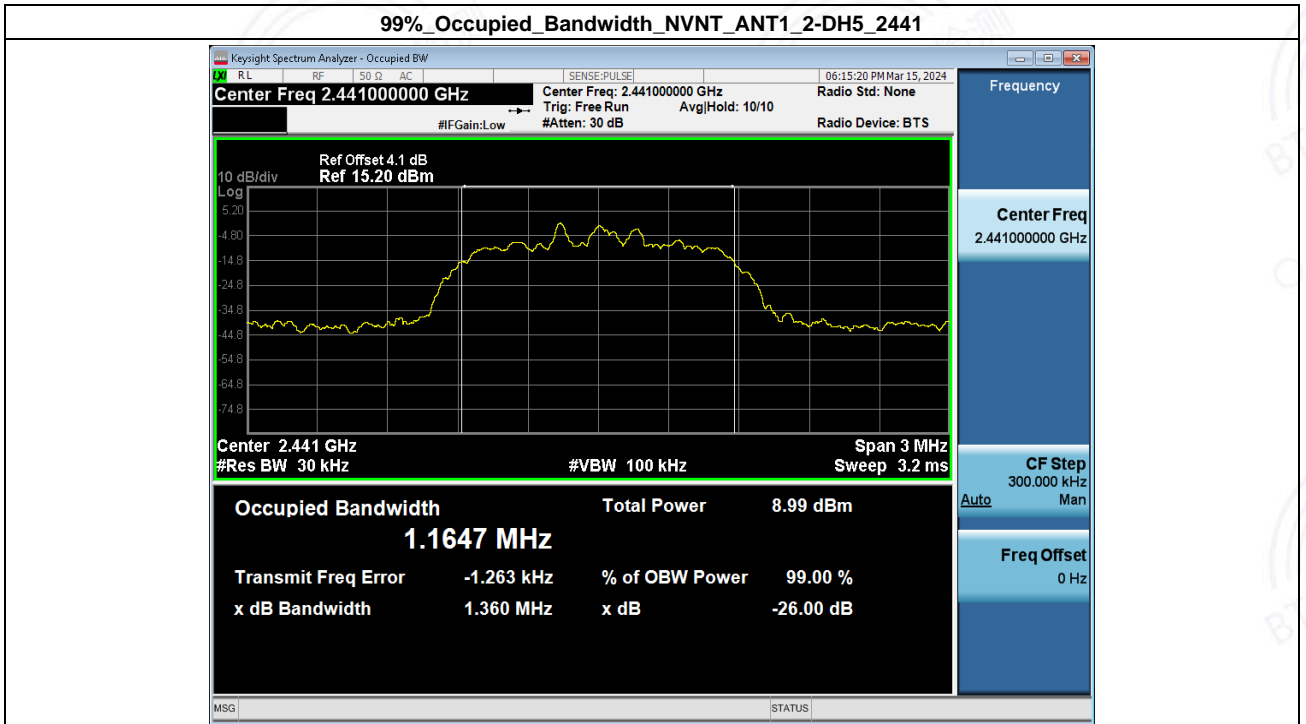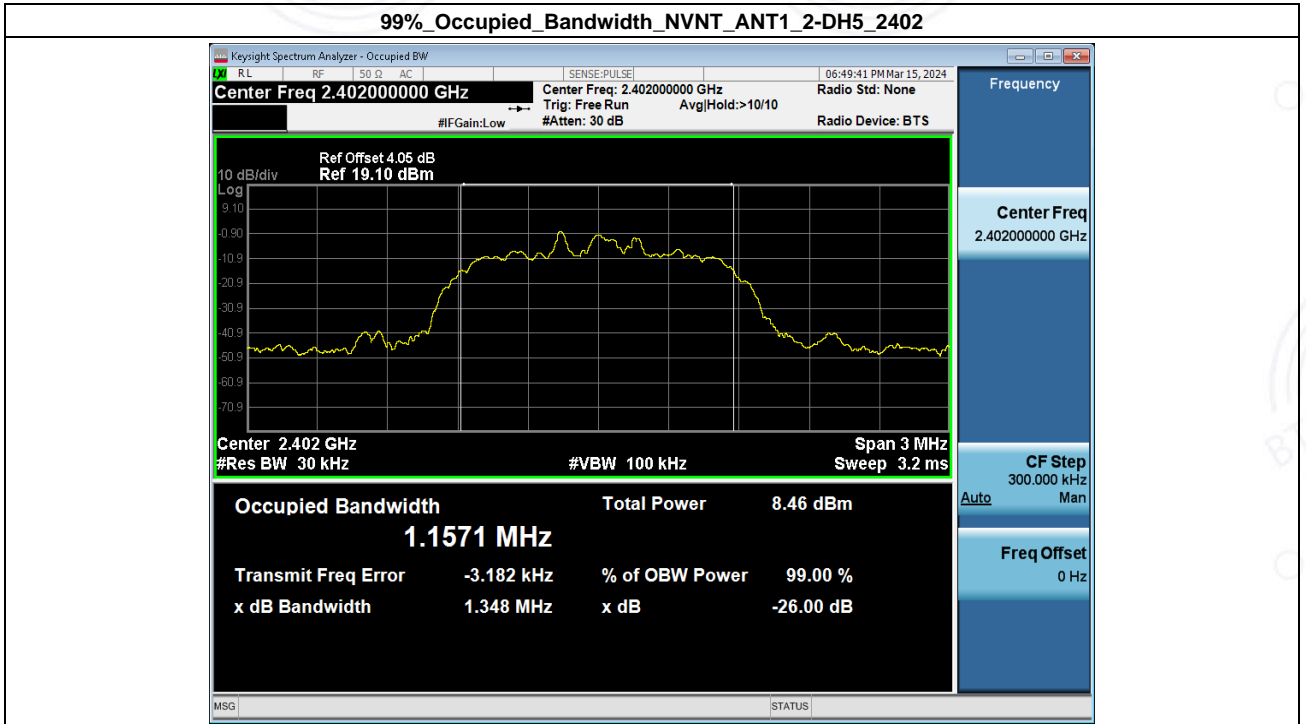


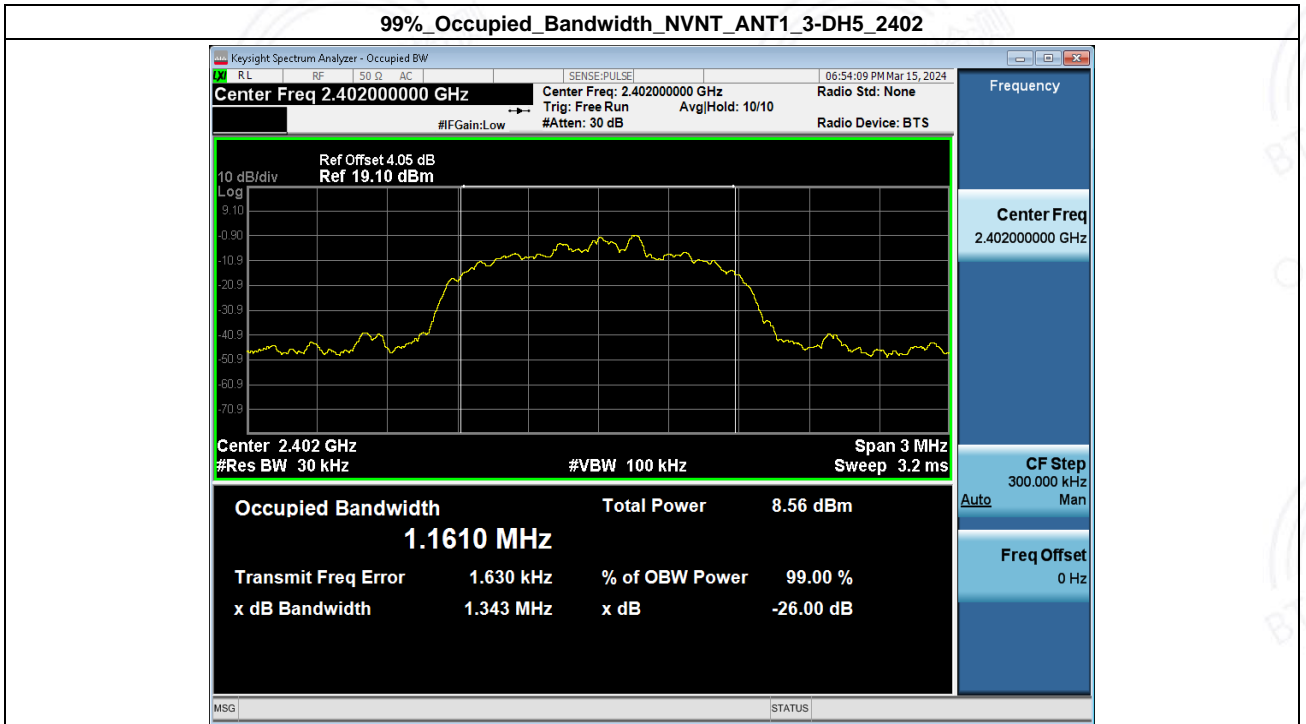
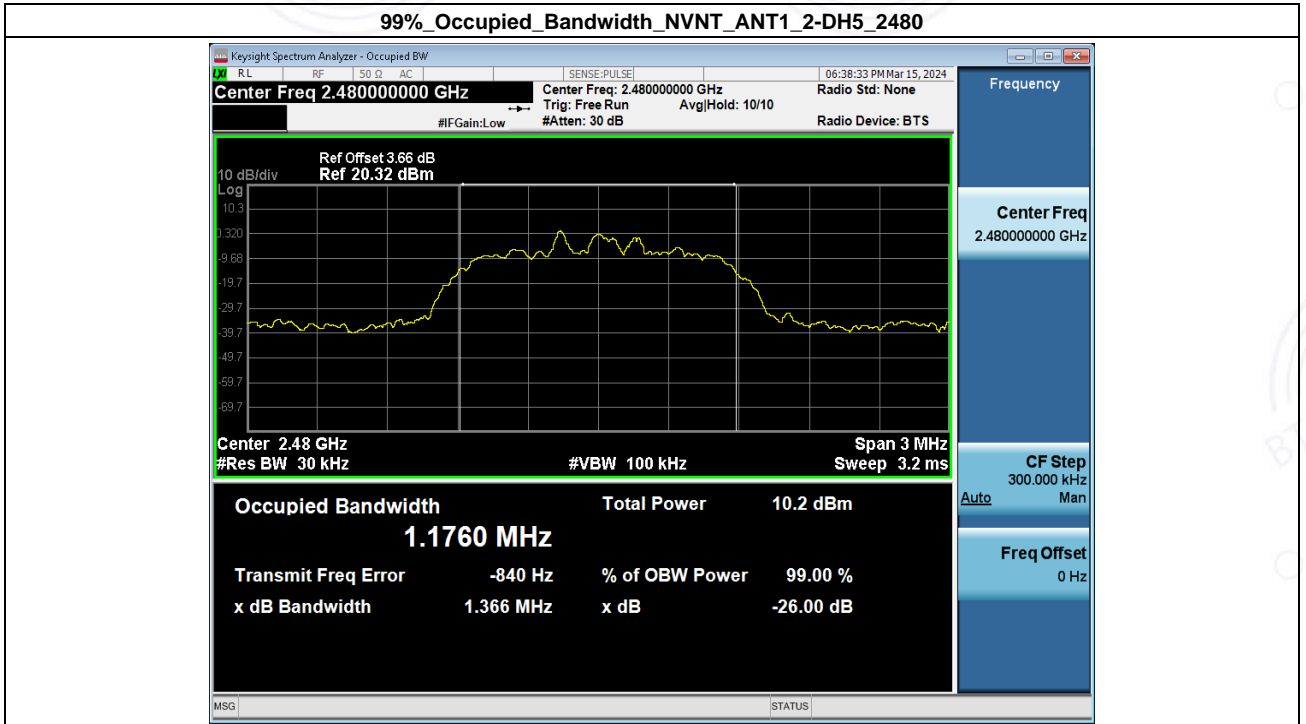


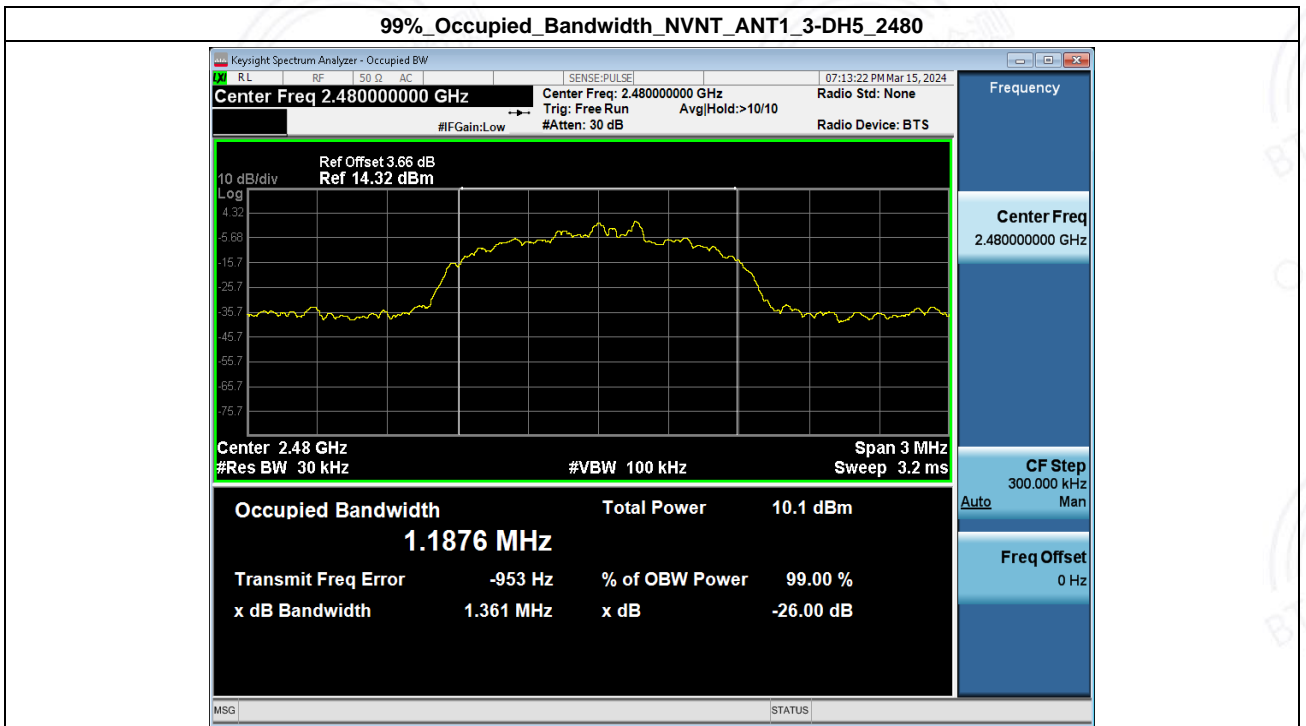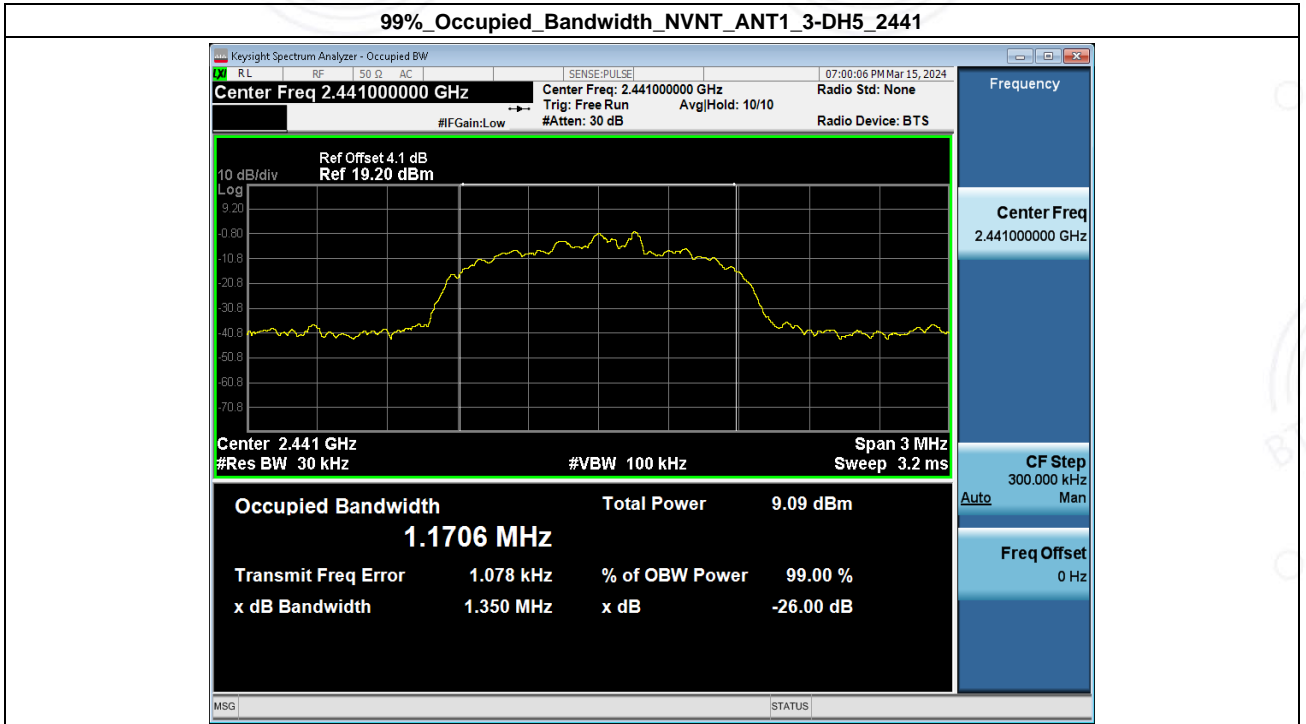


4. Peak Output Power

Condition	Antenna	Modulation	Frequency (MHz)	Max. Conducted Power(dBm)	Max. Conducted Power(mW)	Limit(mW)	Result
NVNT	ANT1	1-DH5	2402.00	2.39	1.73	125	Pass
NVNT	ANT1	1-DH5	2441.00	3.19	2.09	125	Pass
NVNT	ANT1	1-DH5	2480.00	2.93	1.96	125	Pass
NVNT	ANT1	2-DH5	2402.00	1.83	1.53	125	Pass
NVNT	ANT1	2-DH5	2441.00	2.11	1.63	125	Pass
NVNT	ANT1	2-DH5	2480.00	3.09	2.04	125	Pass
NVNT	ANT1	3-DH5	2402.00	1.92	1.56	125	Pass
NVNT	ANT1	3-DH5	2441.00	2.27	1.69	125	Pass
NVNT	ANT1	3-DH5	2480.00	3.20	2.09	125	Pass

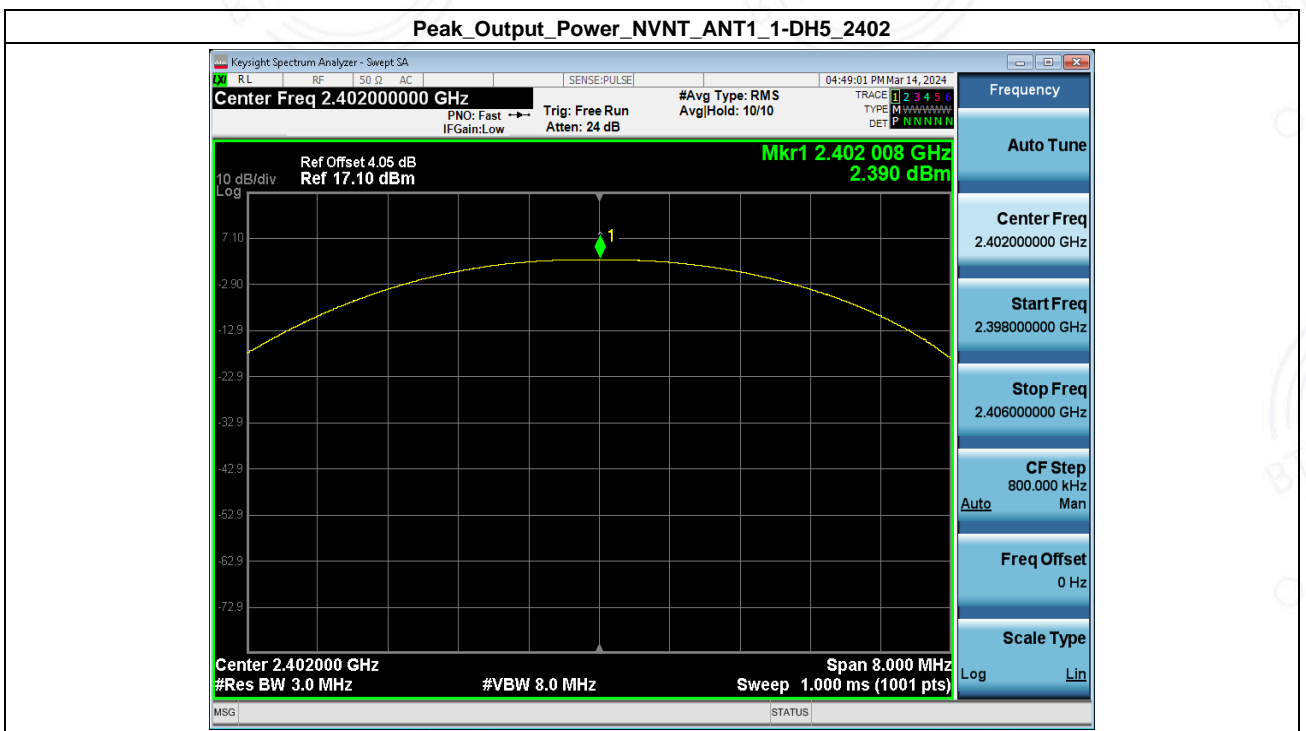


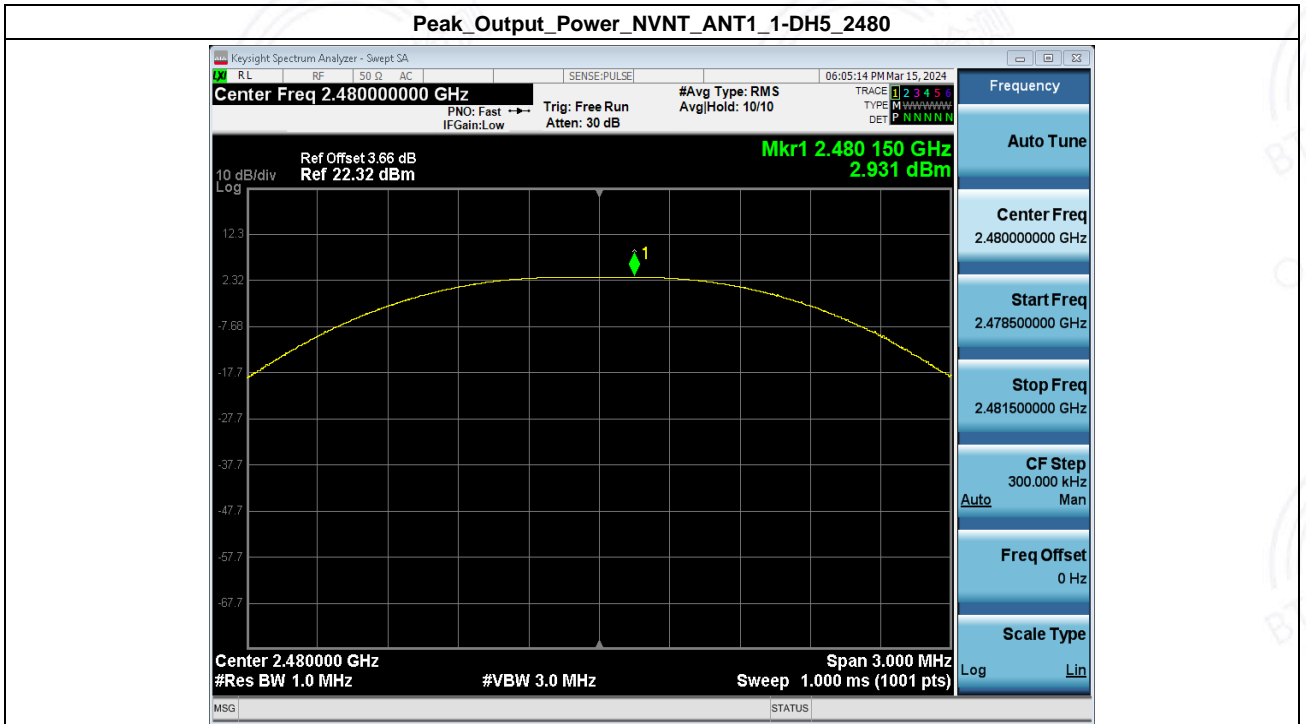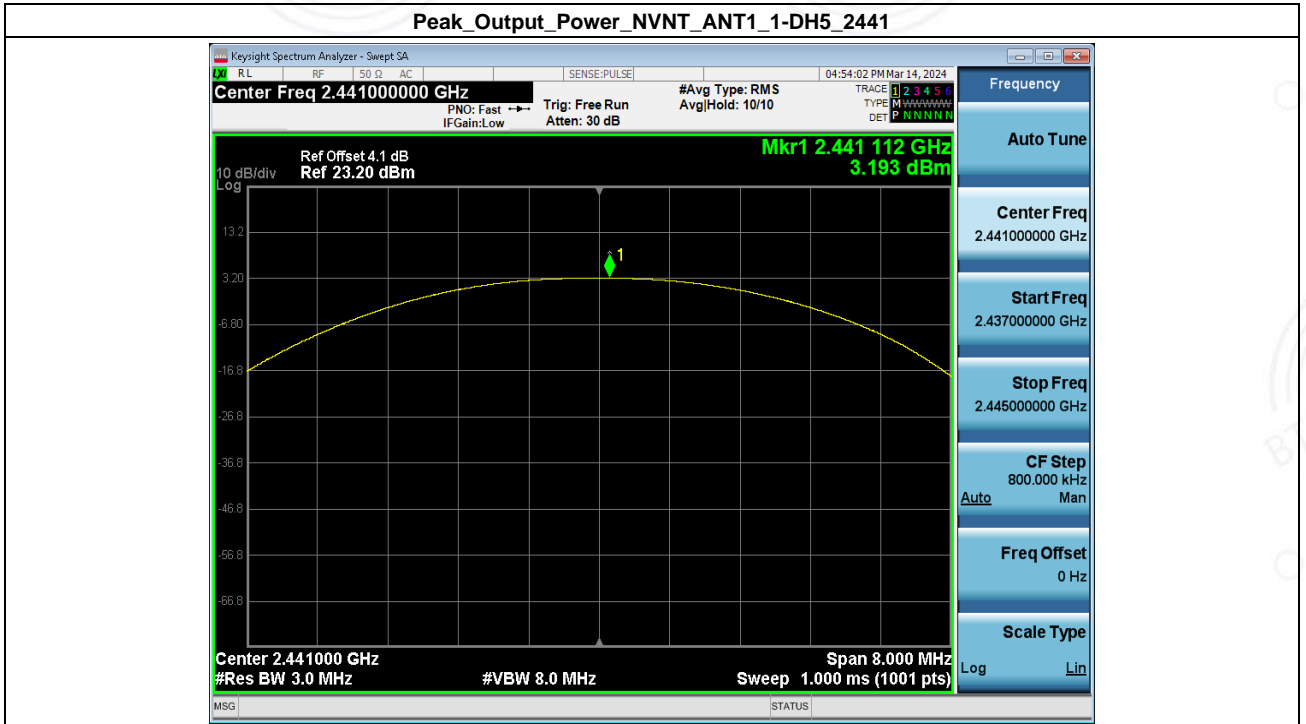


Peak_Output_Power_NVNT_ANT1_2-DH5_2402

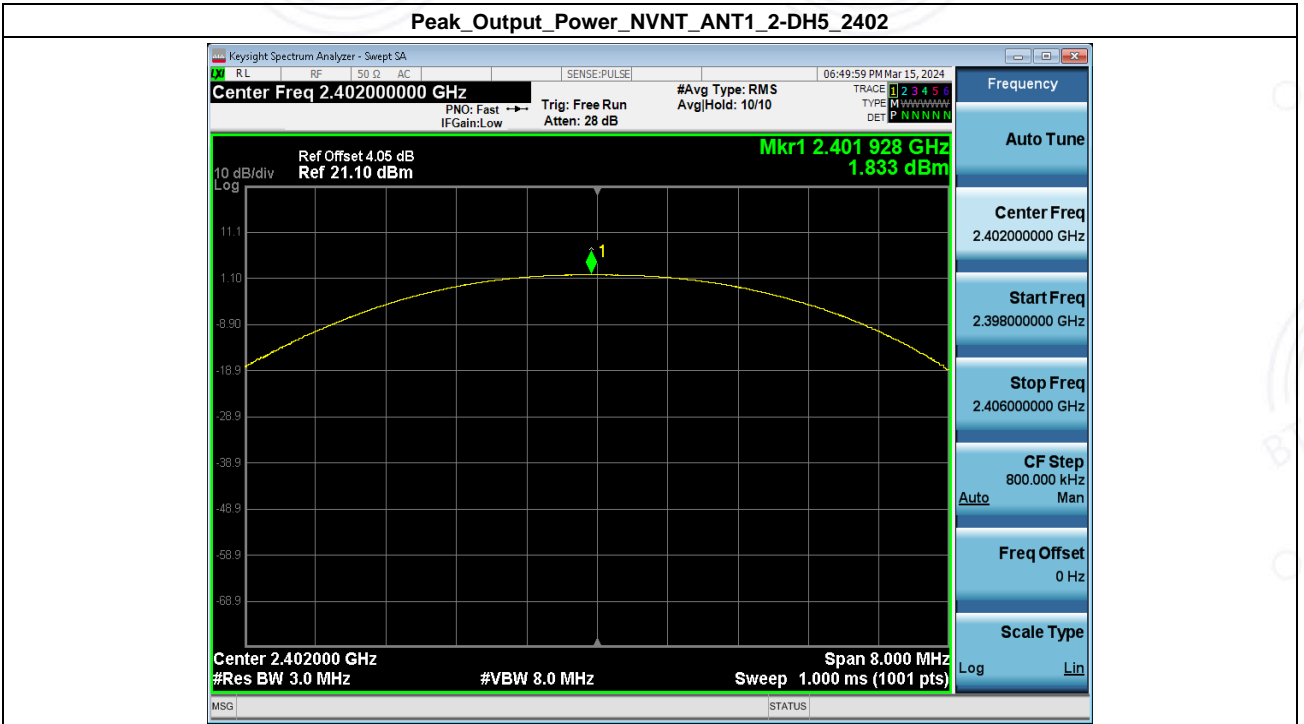


Peak_Output_Power_NVNT_ANT1_2-DH5_2441

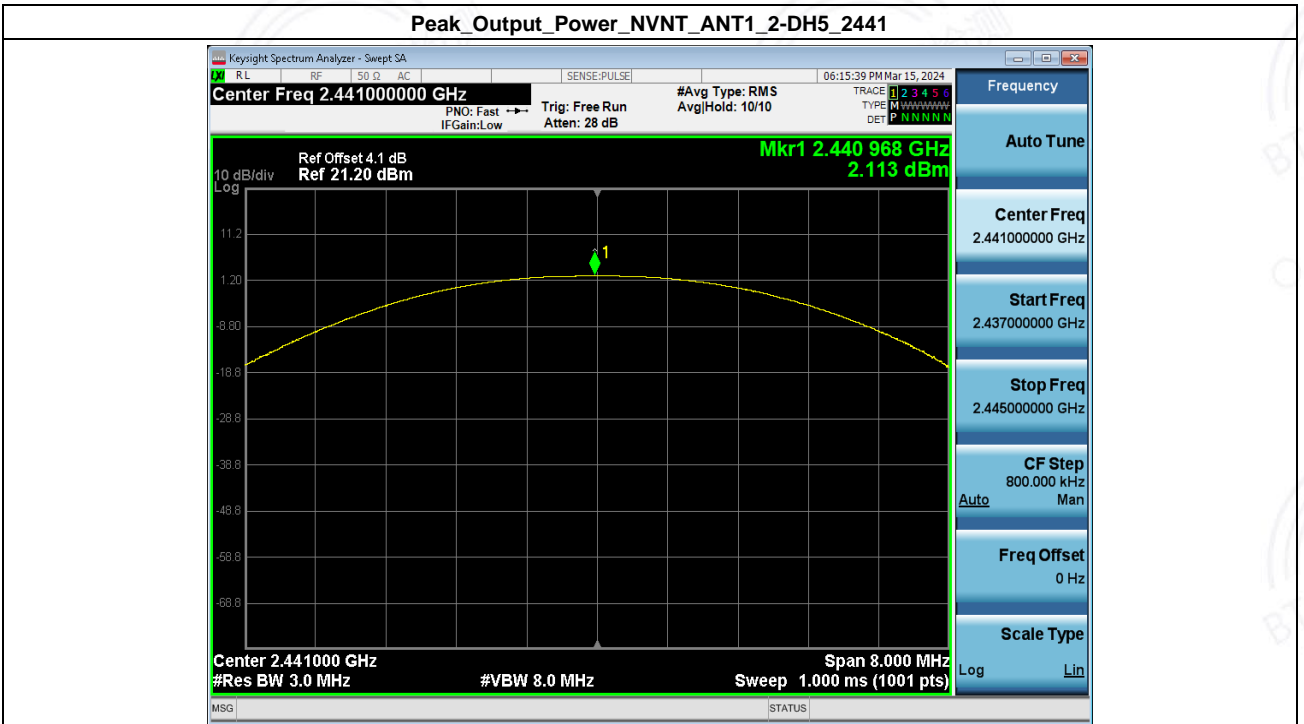


Peak_Output_Power_NVNT_ANT1_2-DH5_2480

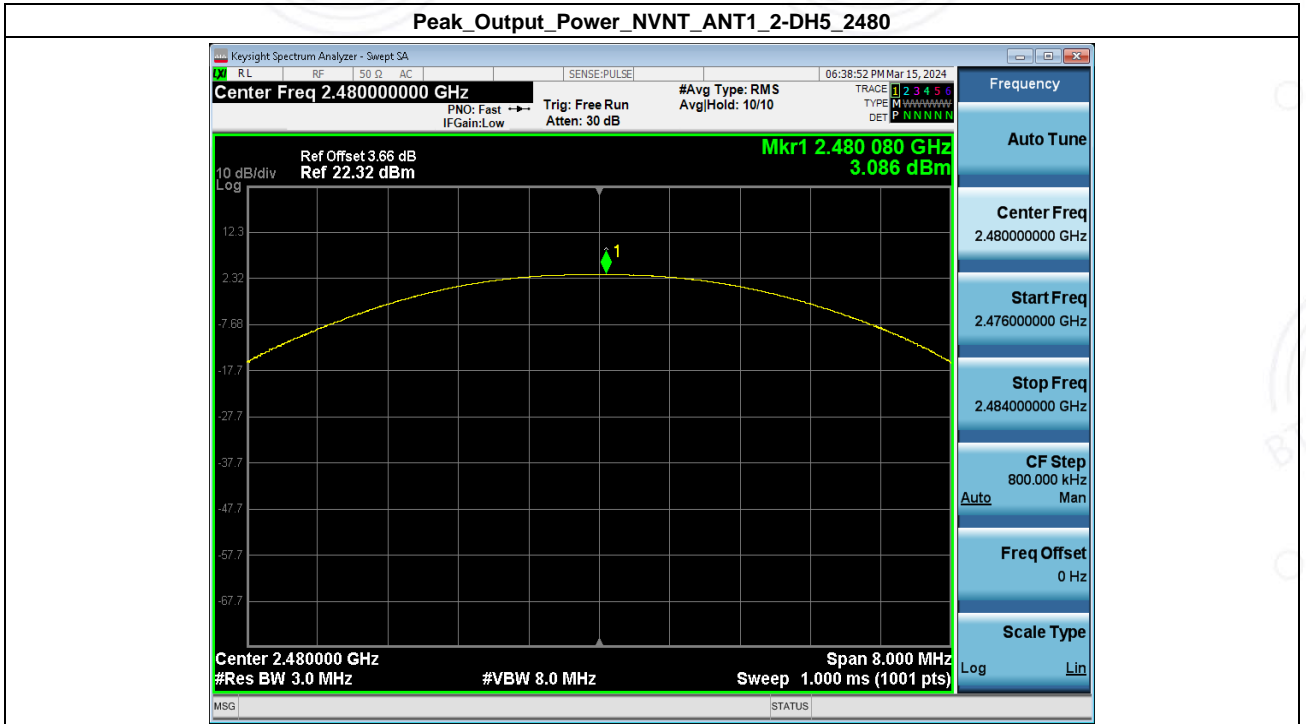


Peak_Output_Power_NVNT_ANT1_3-DH5_2402

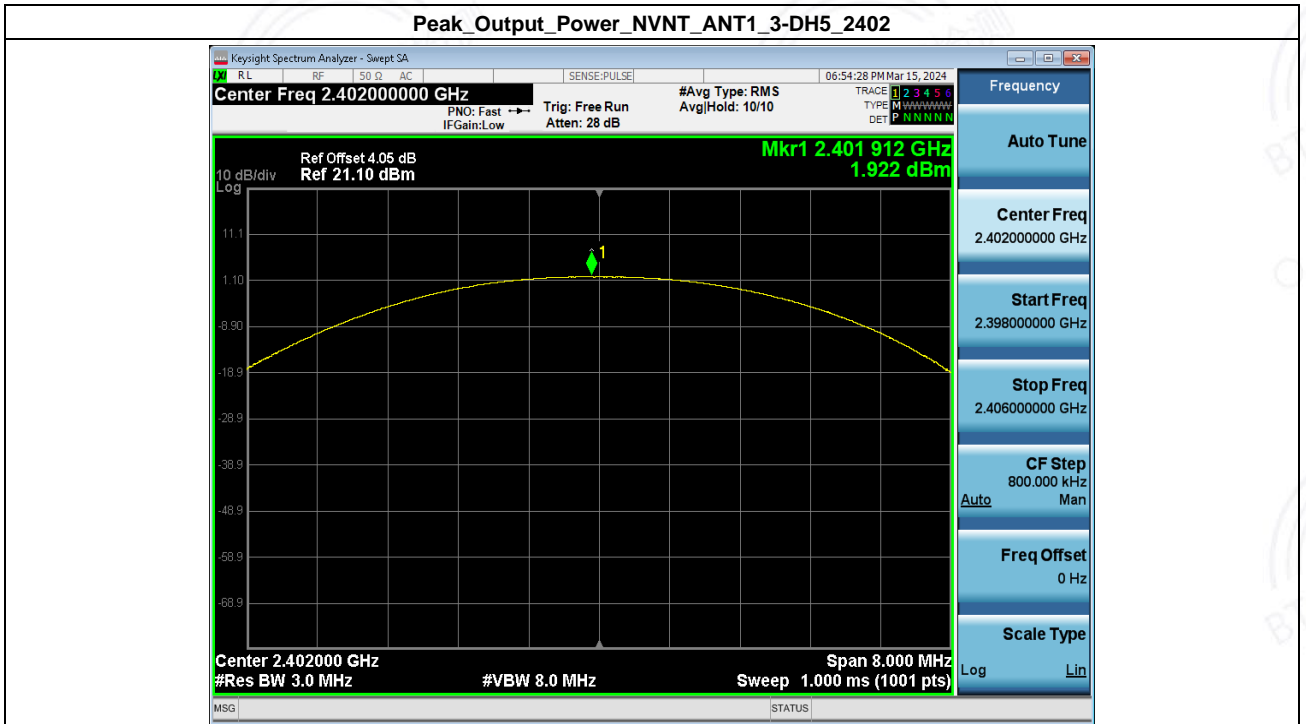

Peak_Output_Power_NVNT_ANT1_3-DH5_2441

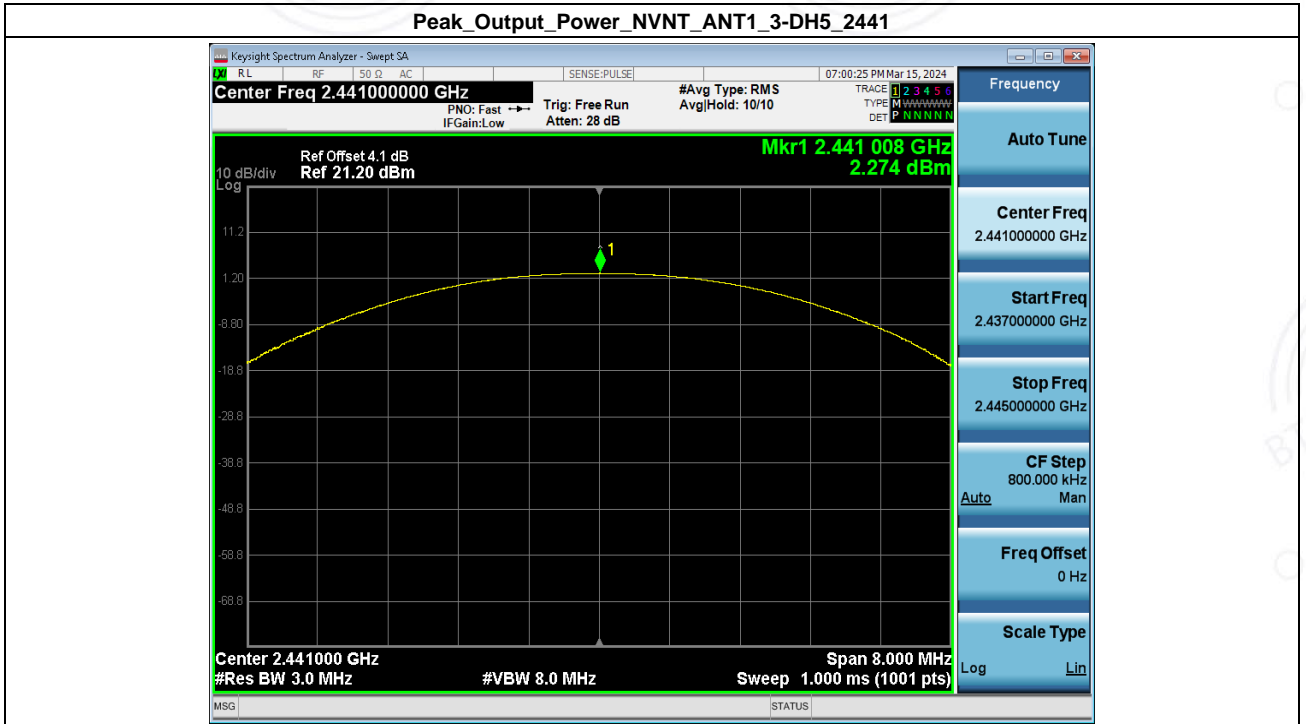


Peak_Output_Power_NVNT_ANT1_3-DH5_2480


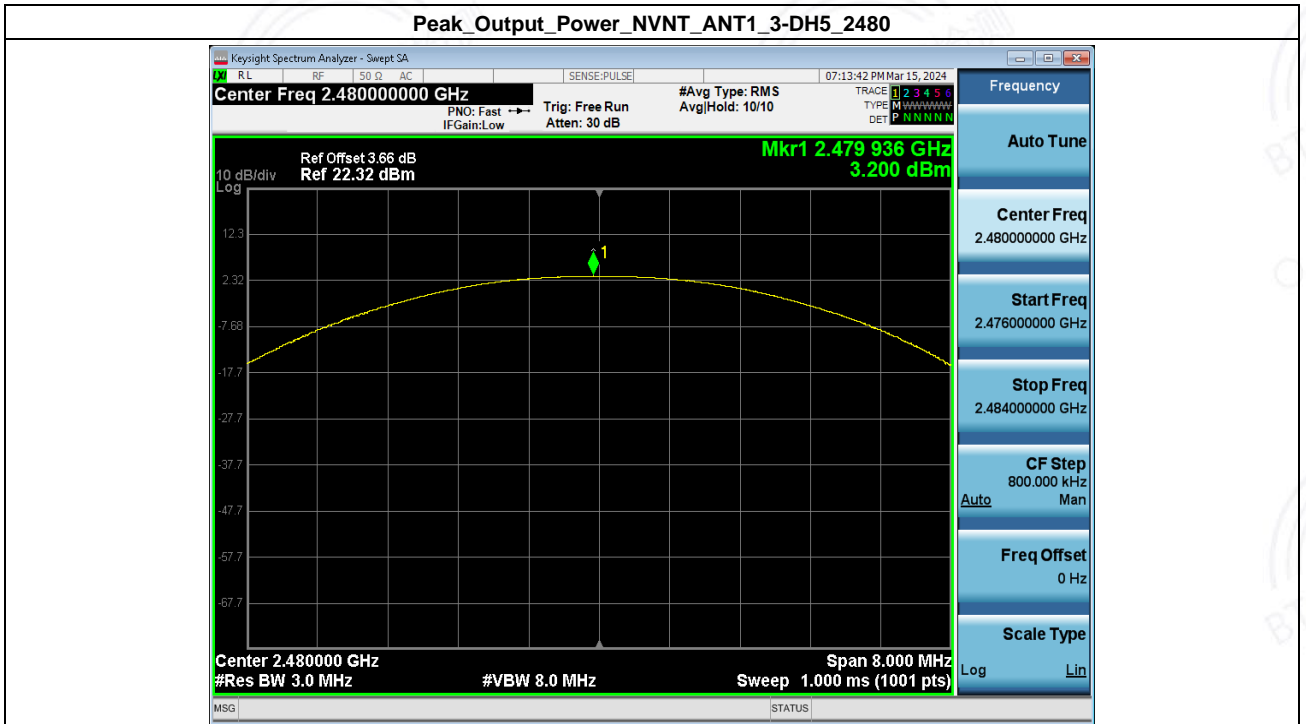




5. Spurious Emissions

Condition	Antenna	Modulation	TX Mode	Spurious MAX.Value(dBm)	Limit	Result
NVNT	ANT1	1-DH5	2402.00	-48.139	-17.828	Pass
NVNT	ANT1	1-DH5	2441.00	-48.594	-16.863	Pass
NVNT	ANT1	1-DH5	2480.00	-48.033	-17.151	Pass
NVNT	ANT1	2-DH5	2402.00	-50.176	-18.432	Pass
NVNT	ANT1	2-DH5	2441.00	-50.477	-17.940	Pass
NVNT	ANT1	2-DH5	2480.00	-49.406	-17.056	Pass
NVNT	ANT1	3-DH5	2402.00	-48.554	-18.281	Pass
NVNT	ANT1	3-DH5	2441.00	-50.979	-17.872	Pass
NVNT	ANT1	3-DH5	2480.00	-47.076	-17.021	Pass


1_Reference_Level_NVNT_ANT1_1-DH5_2402

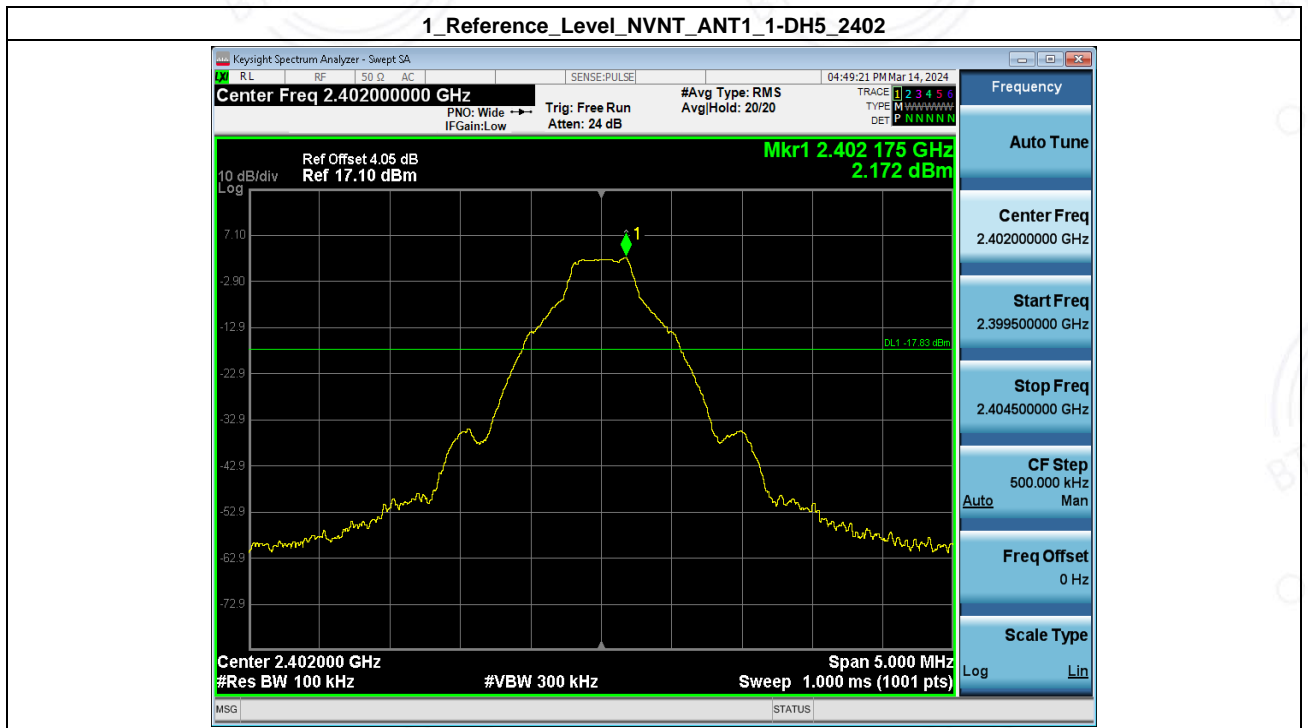

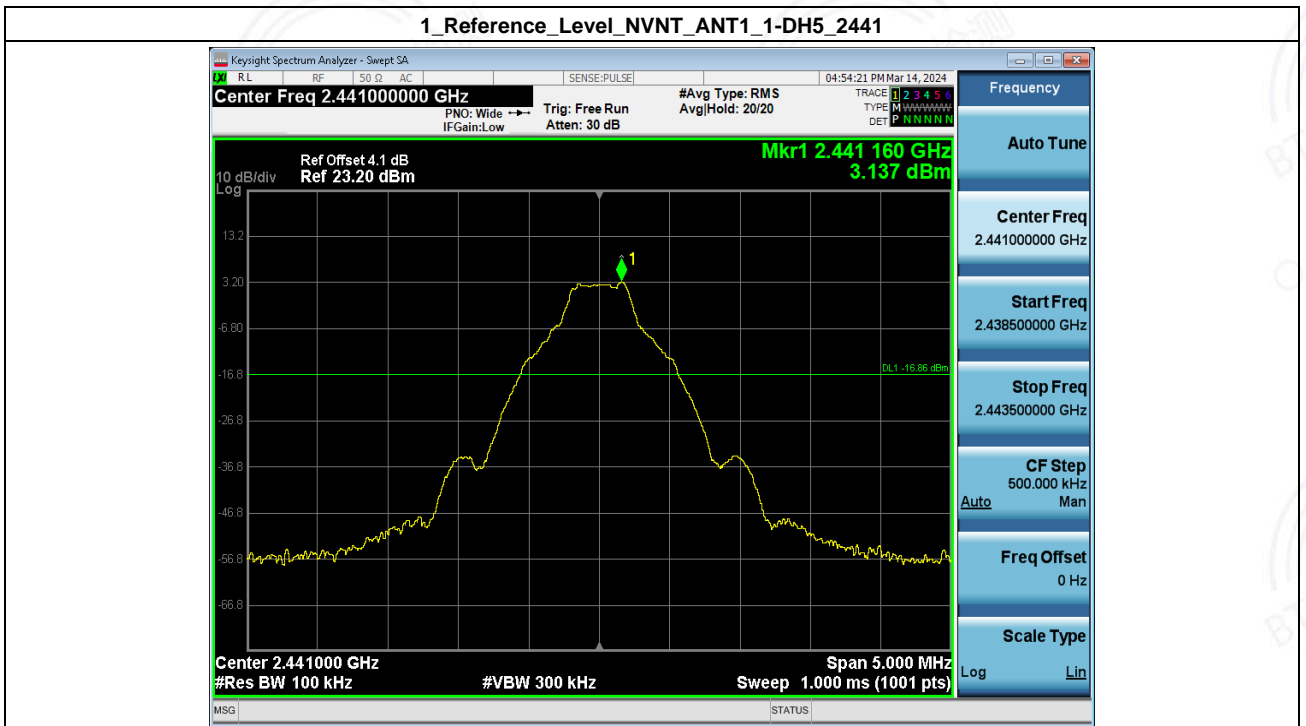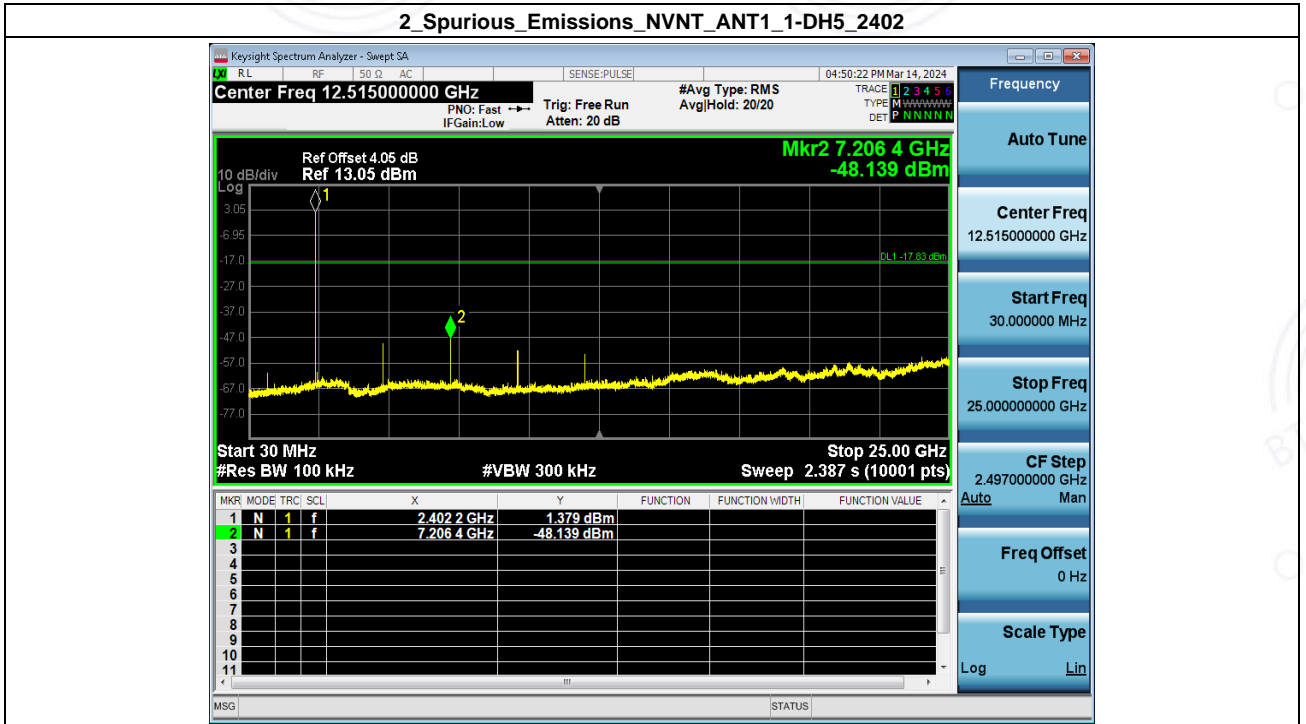


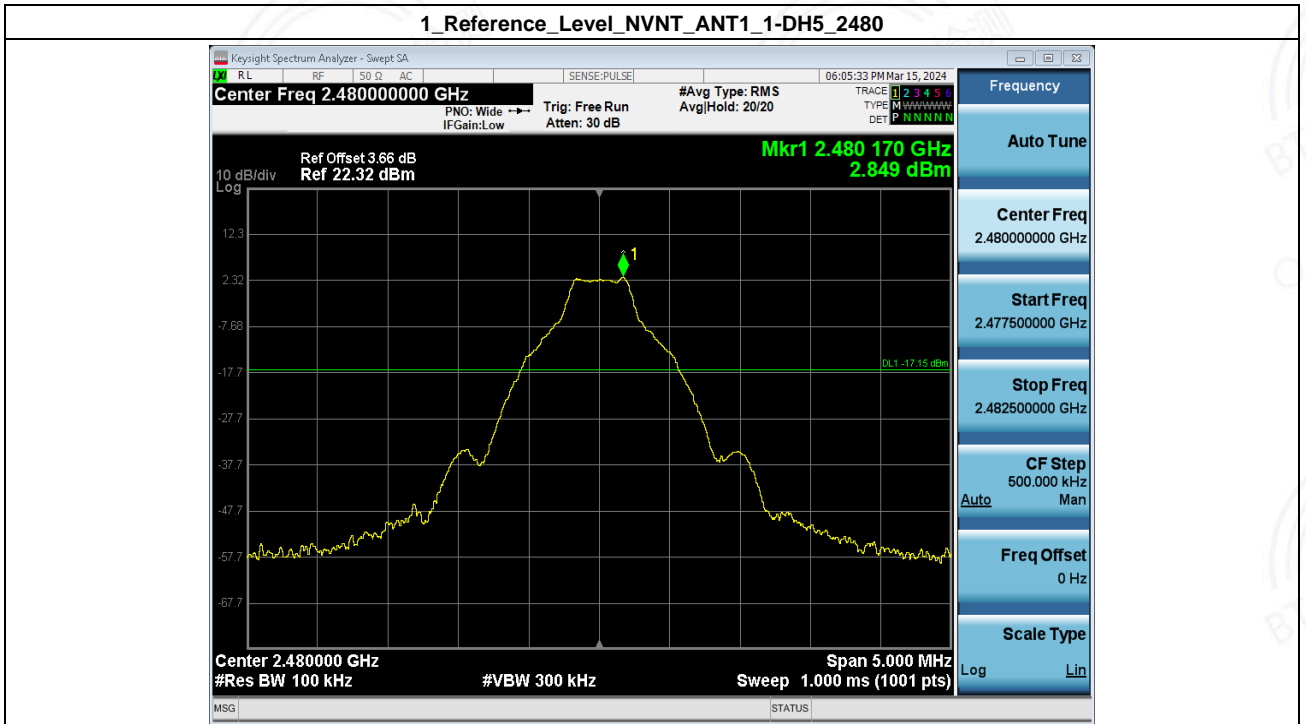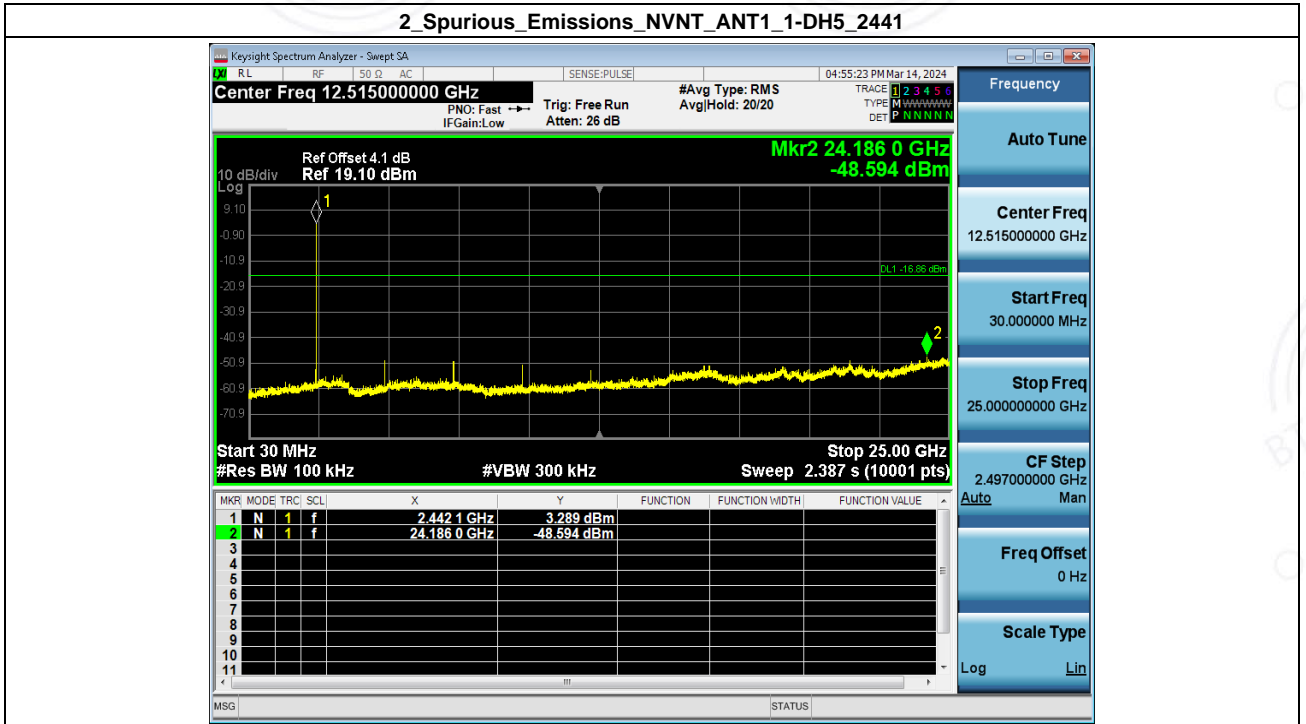


2_Spurious_Emissions_NVNT_ANT1_1-DH5_2480

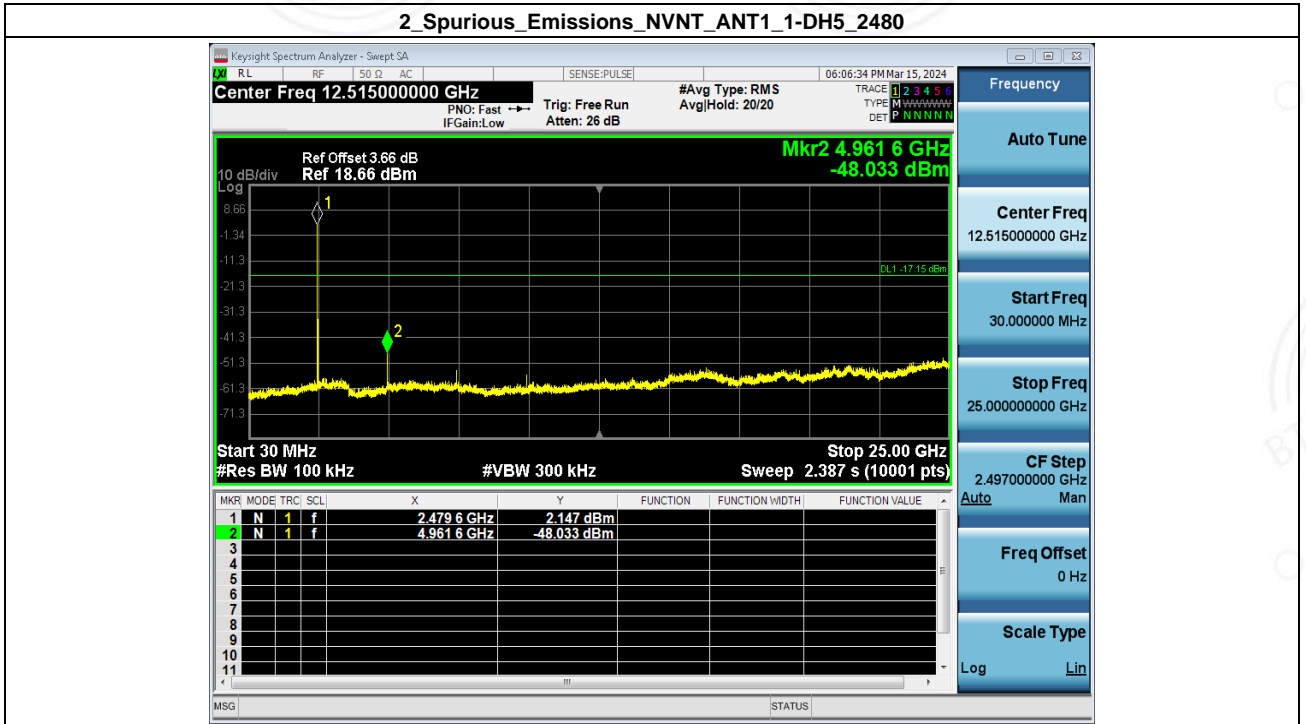


1_Reference_Level_NVNT_ANT1_2-DH5_2402


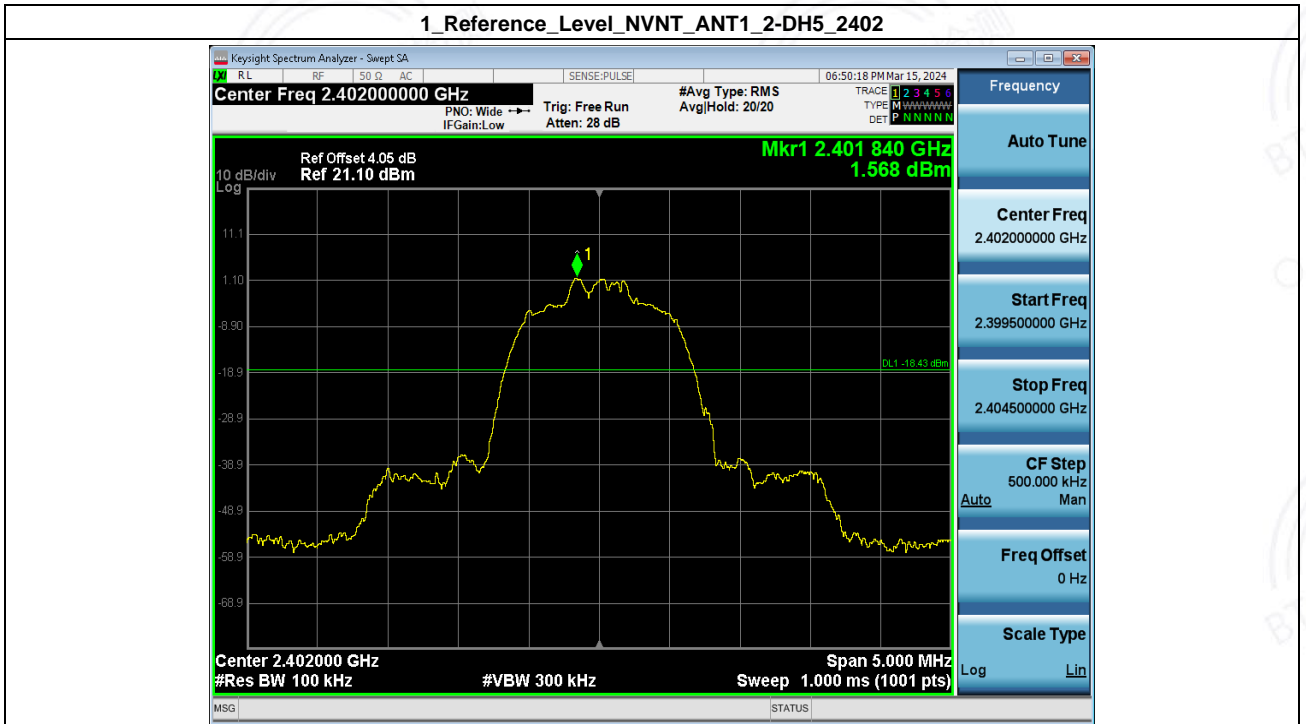


2_Spurious_Emissions_NVNT_ANT1_2-DH5_2402

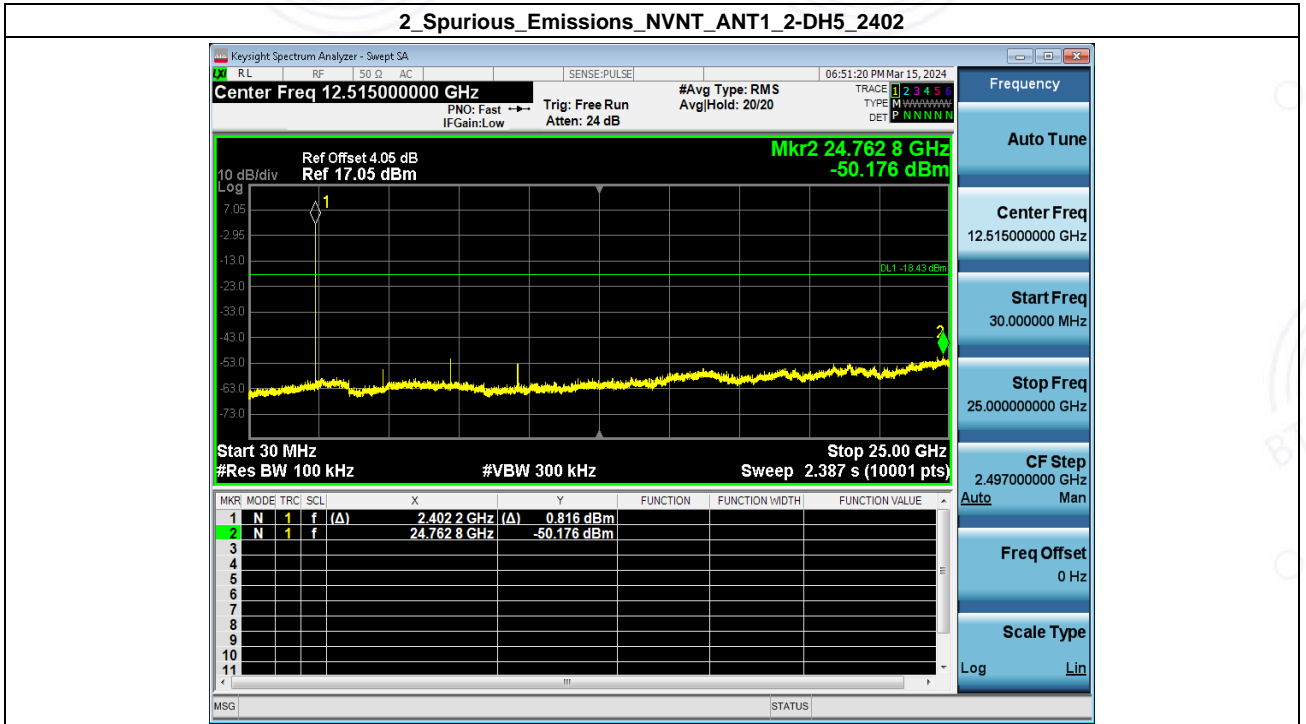


1_Reference_Level_NVNT_ANT1_2-DH5_2441

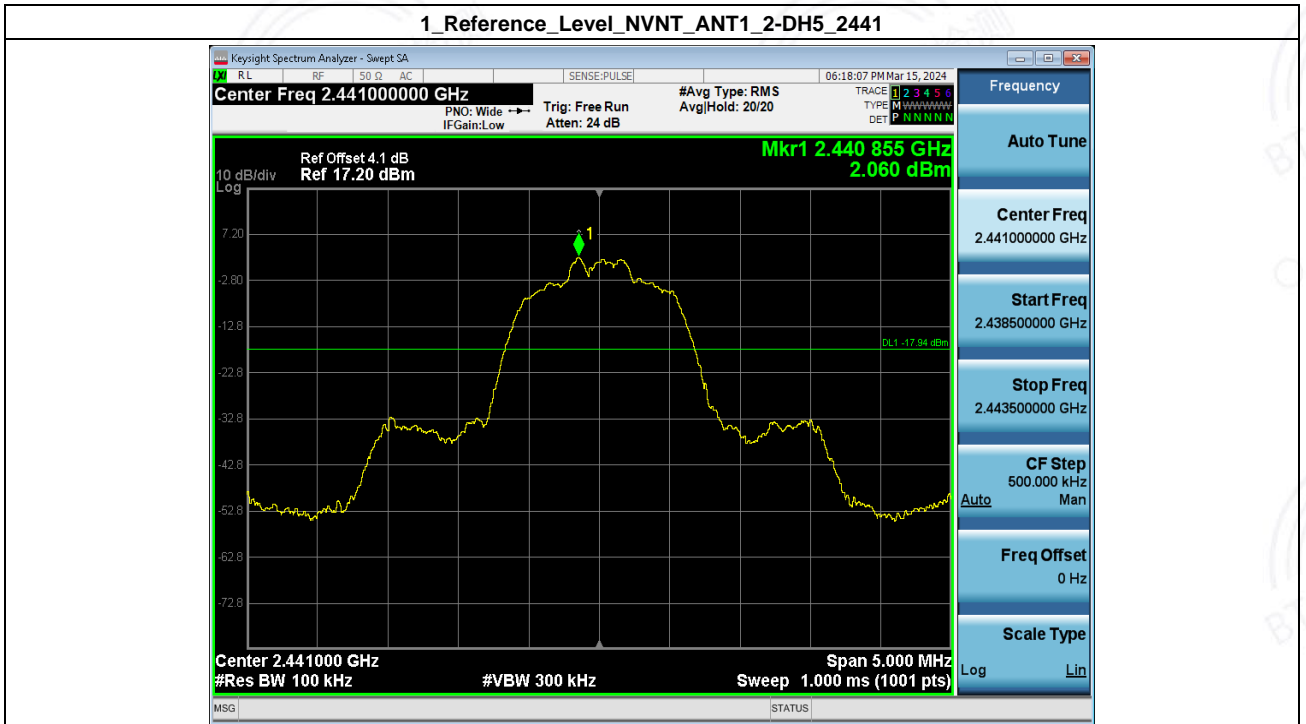


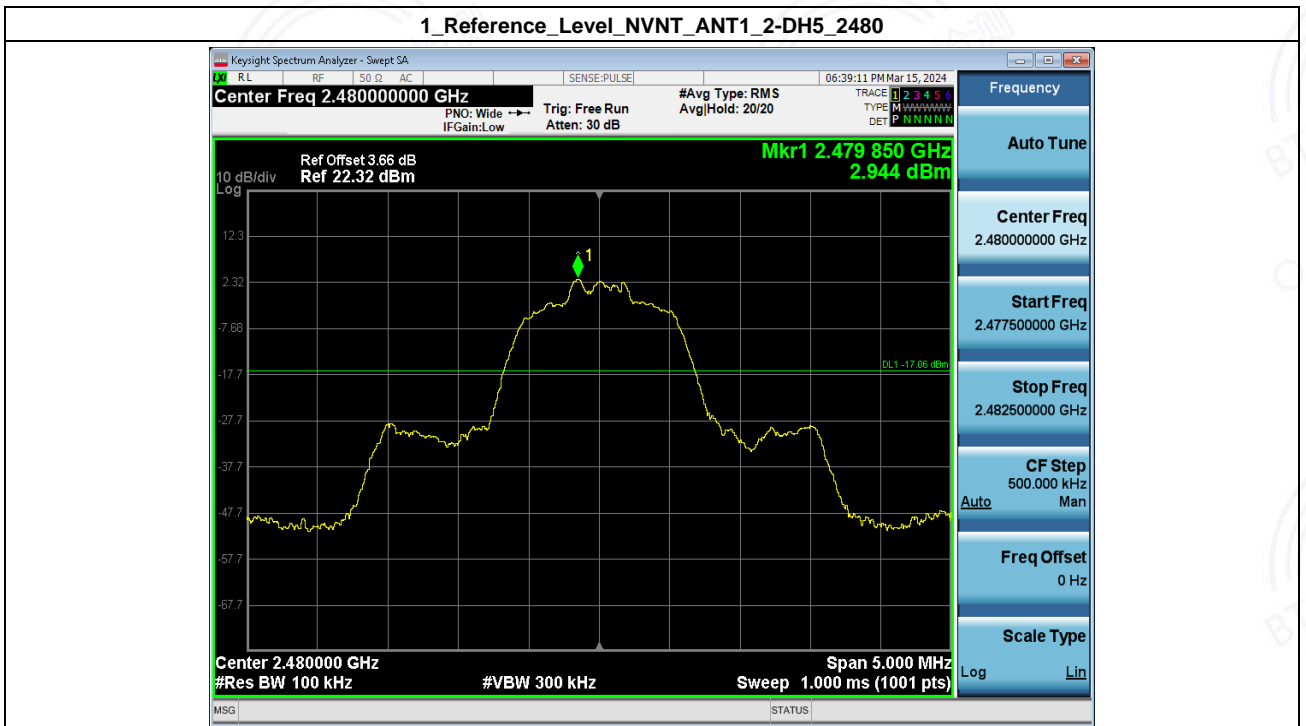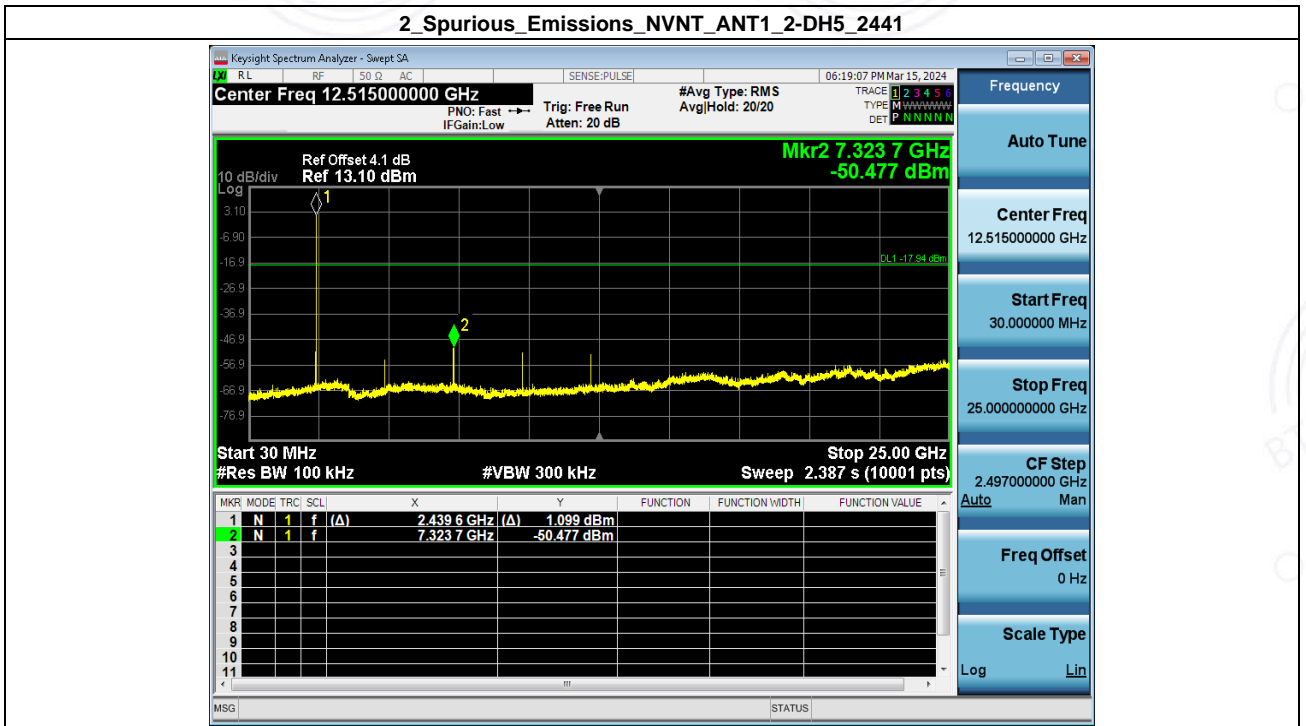


2_Spurious_Emissions_NVNT_ANT1_2-DH5_2480

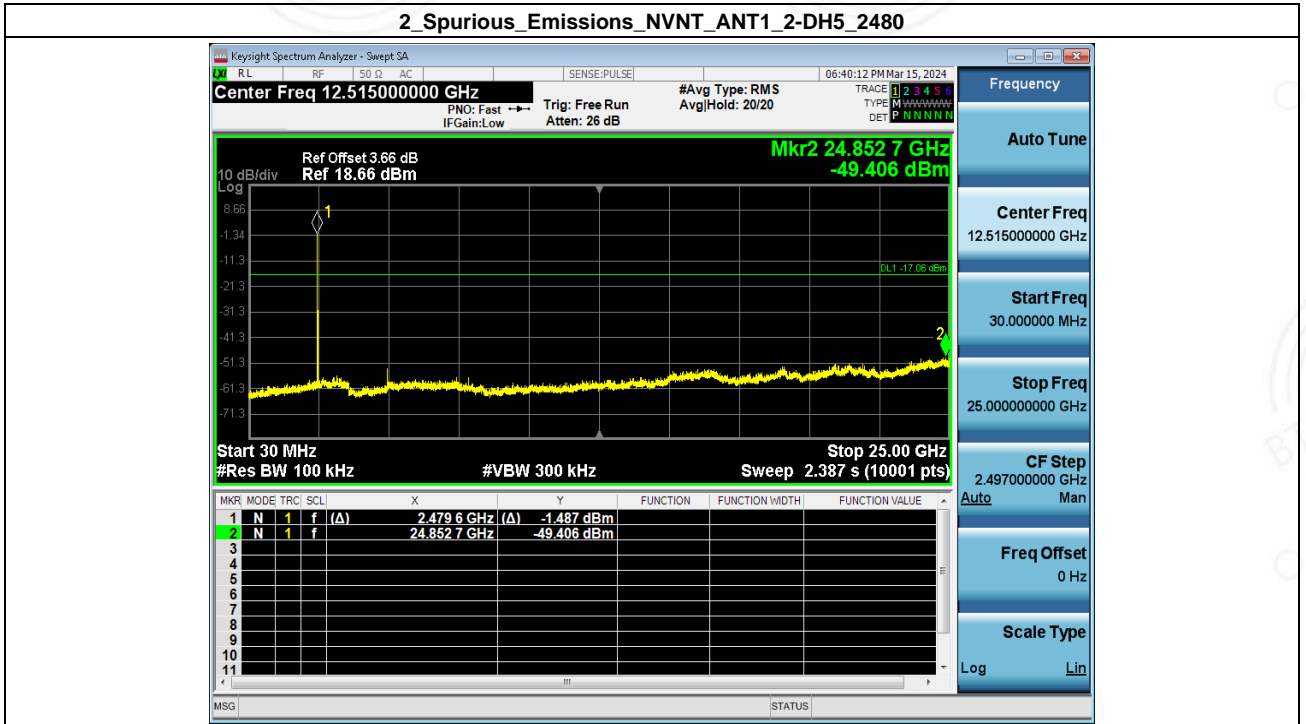


1_Reference_Level_NVNT_ANT1_3-DH5_2402

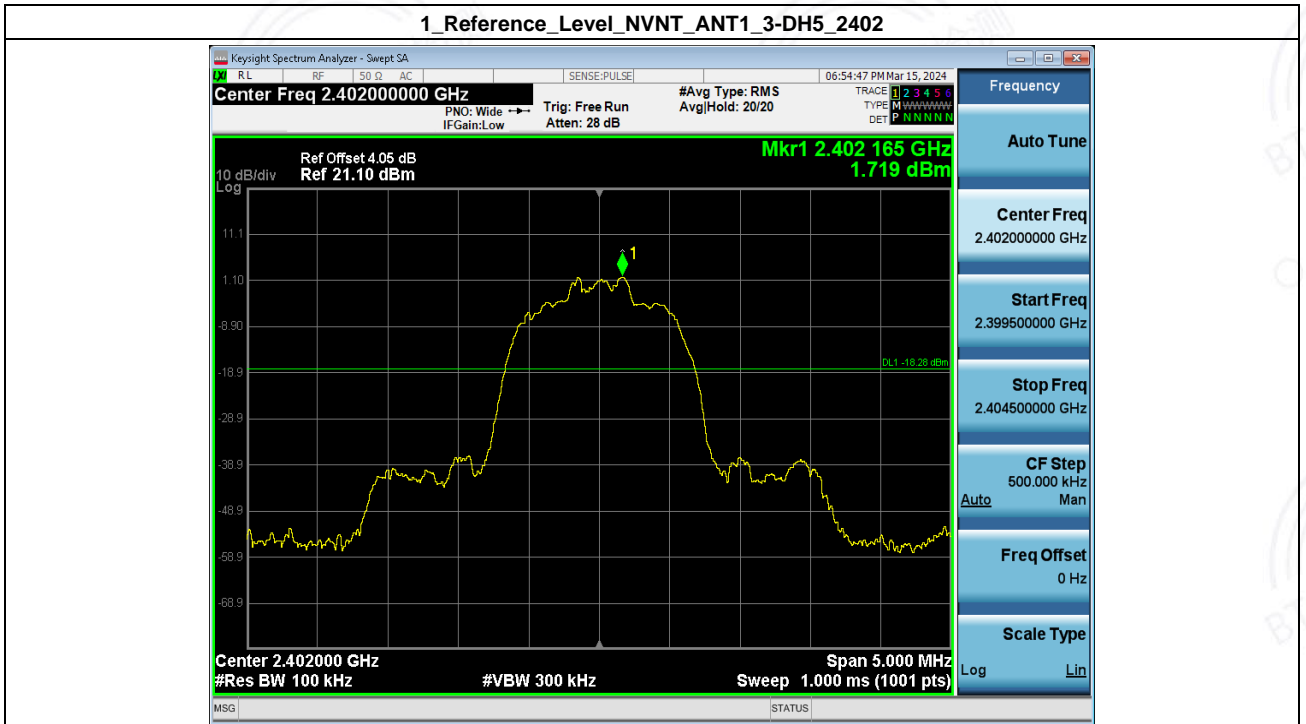


2_Spurious_Emissions_NVNT_ANT1_3-DH5_2402

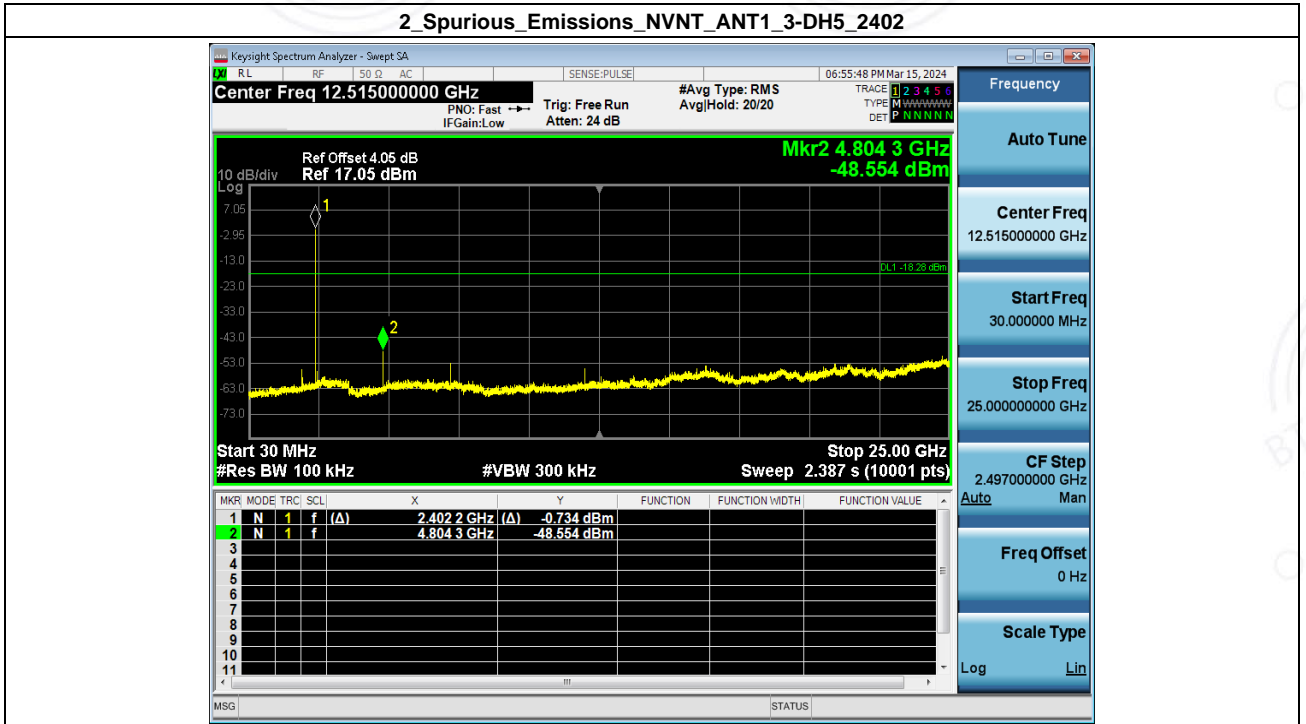


1_Reference_Level_NVNT_ANT1_3-DH5_2441

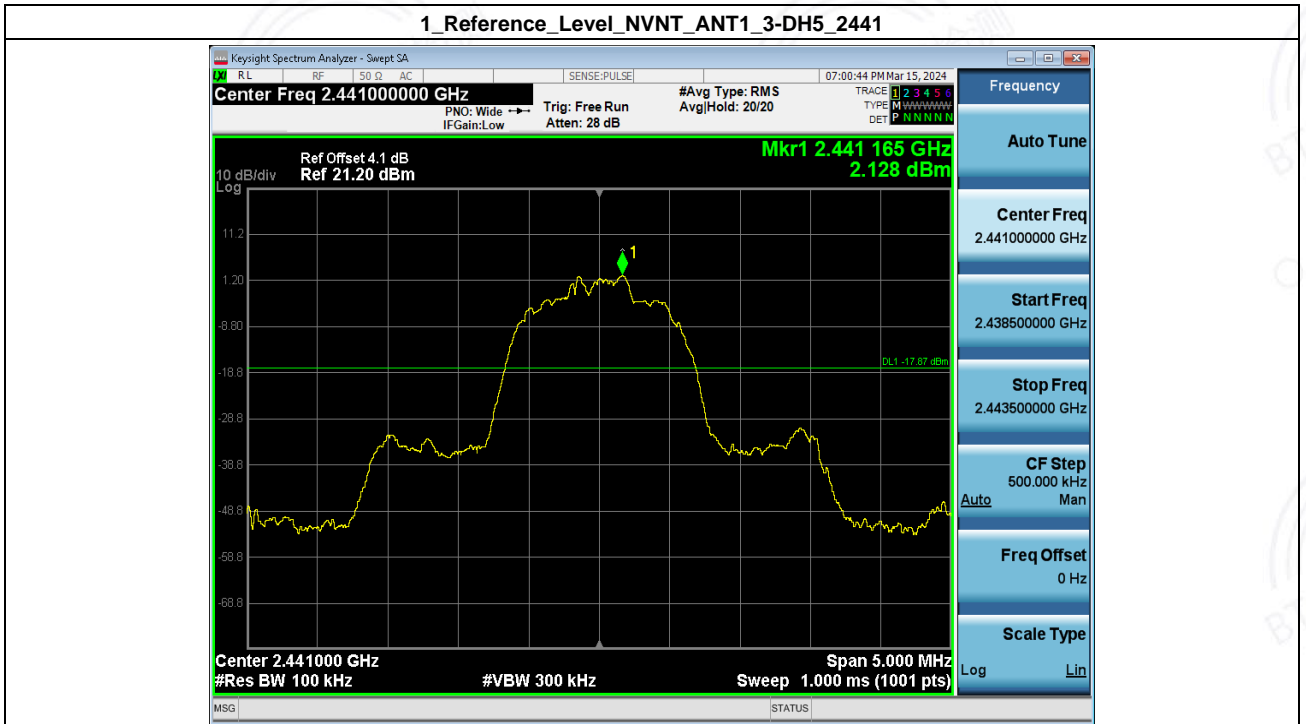


2_Spurious_Emissions_NVNT_ANT1_3-DH5_2441

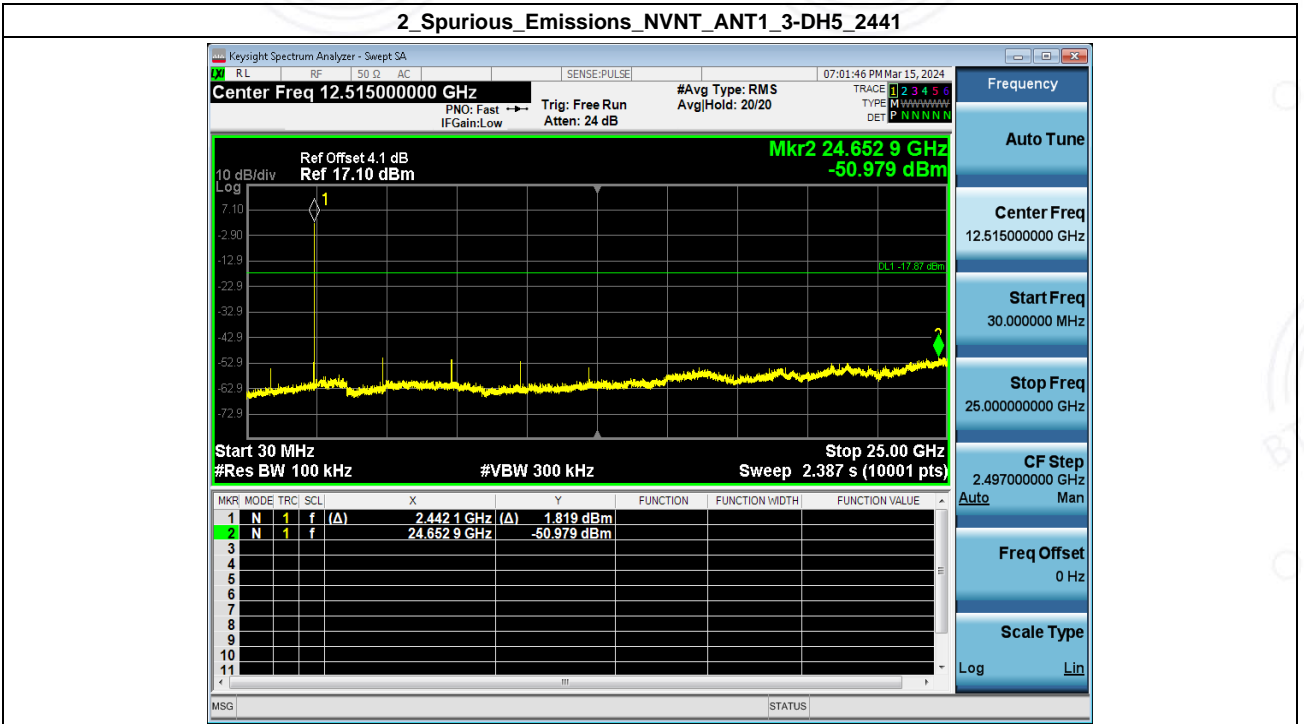


1_Reference_Level_NVNT_ANT1_3-DH5_2480

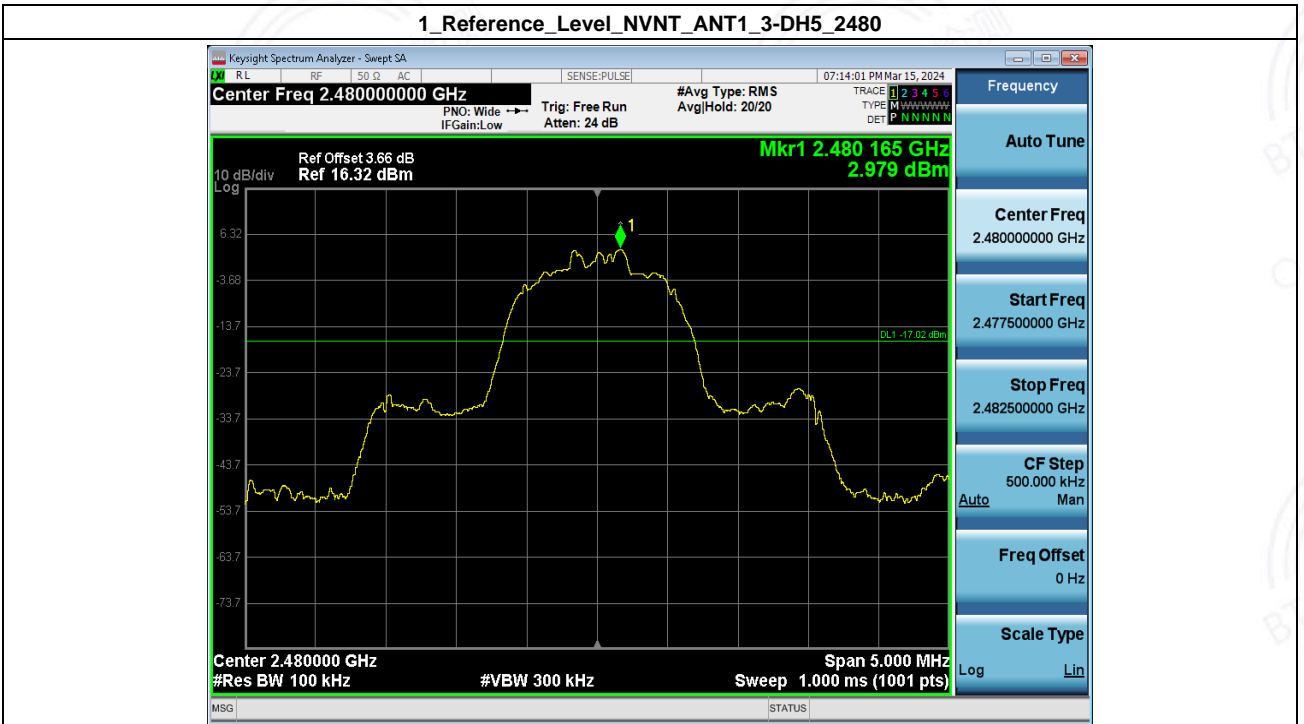

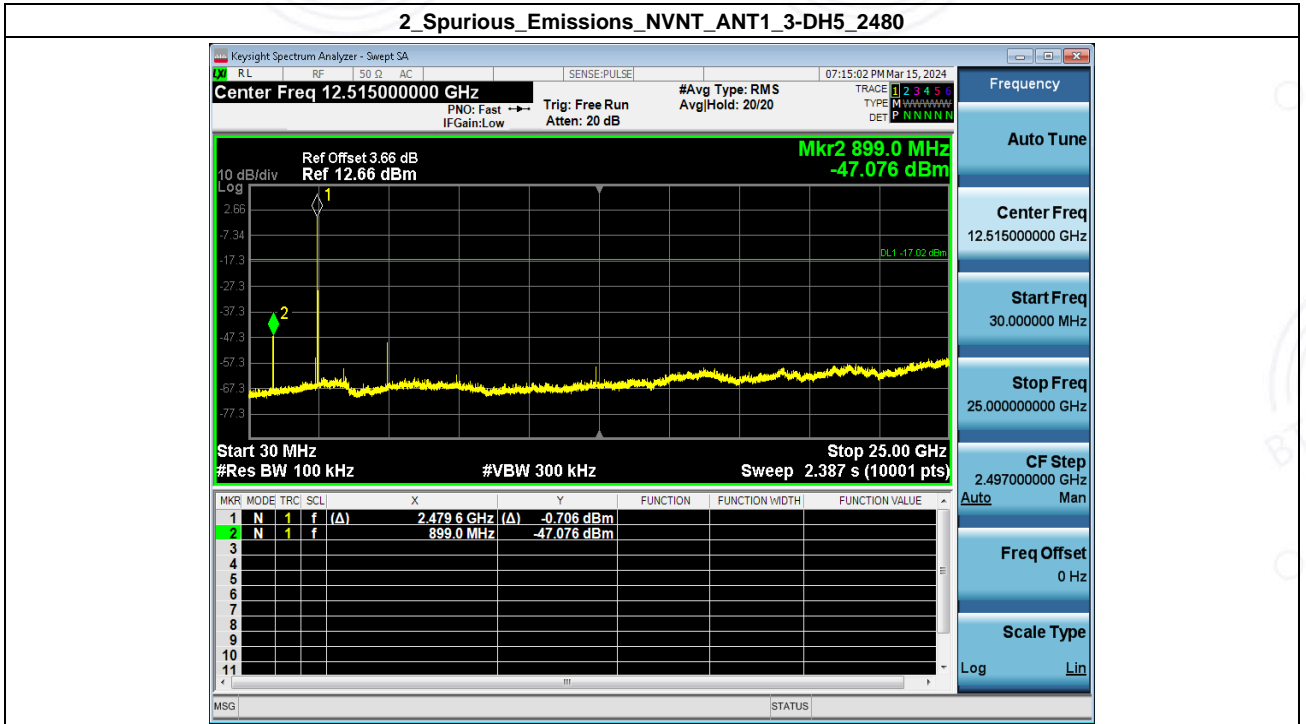


6. Bandedge


Condition	Antenna	Modulation	TX Mode	Bandedge MAX.Value	Limit	Result
NVNT	ANT1	1-DH5	2402.00	-58.017	-17.828	Pass
NVNT	ANT1	1-DH5	Hopping_LCH	-59.652	-15.797	Pass
NVNT	ANT1	1-DH5	2480.00	-58.065	-17.151	Pass
NVNT	ANT1	1-DH5	Hopping_HCH	-58.829	-17.401	Pass
NVNT	ANT1	2-DH5	2402.00	-55.261	-18.432	Pass
NVNT	ANT1	2-DH5	Hopping_LCH	-55.712	-17.051	Pass
NVNT	ANT1	2-DH5	2480.00	-57.694	-16.25	Pass
NVNT	ANT1	2-DH5	Hopping_HCH	-61.608	-17.103	Pass
NVNT	ANT1	3-DH5	2402.00	-54.043	-18.281	Pass
NVNT	ANT1	3-DH5	Hopping_LCH	-56.185	-16.707	Pass
NVNT	ANT1	3-DH5	2480.00	-56.613	-17.021	Pass
NVNT	ANT1	3-DH5	Hopping_HCH	-63.483	-17.353	Pass

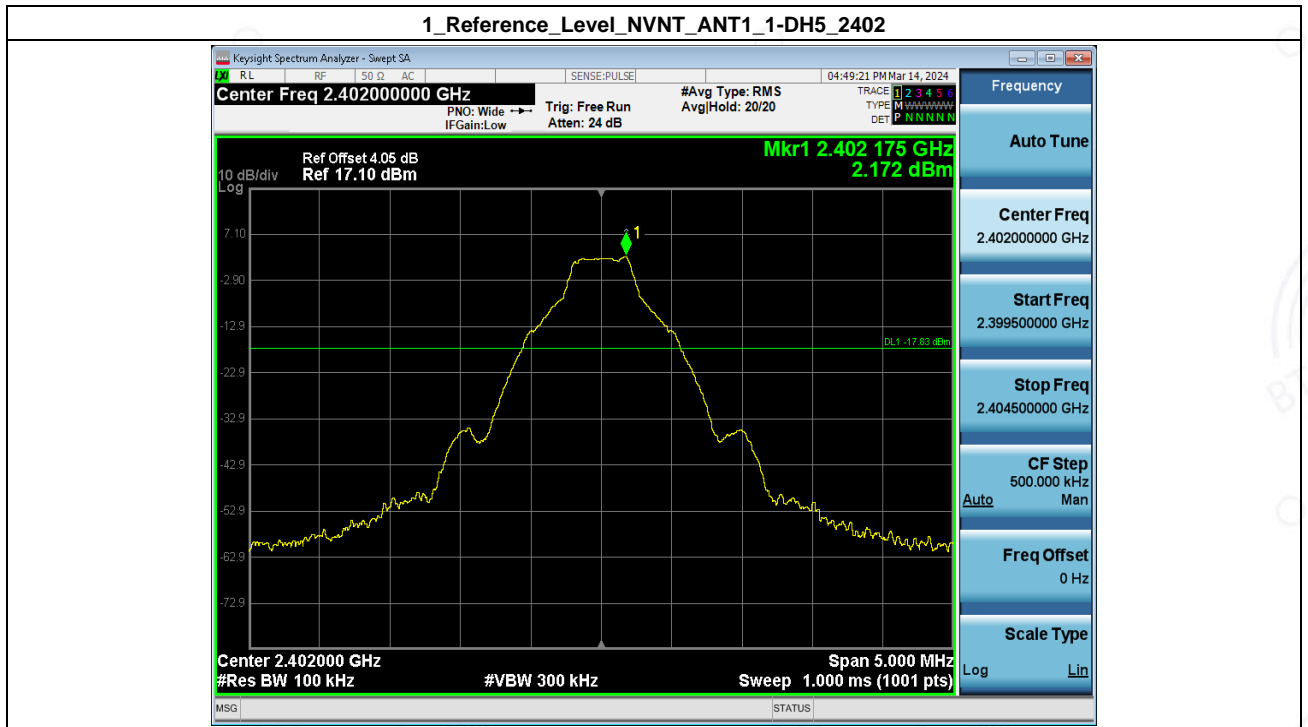


2_Bandedge_NVNT_ANT1_1-DH5_2402

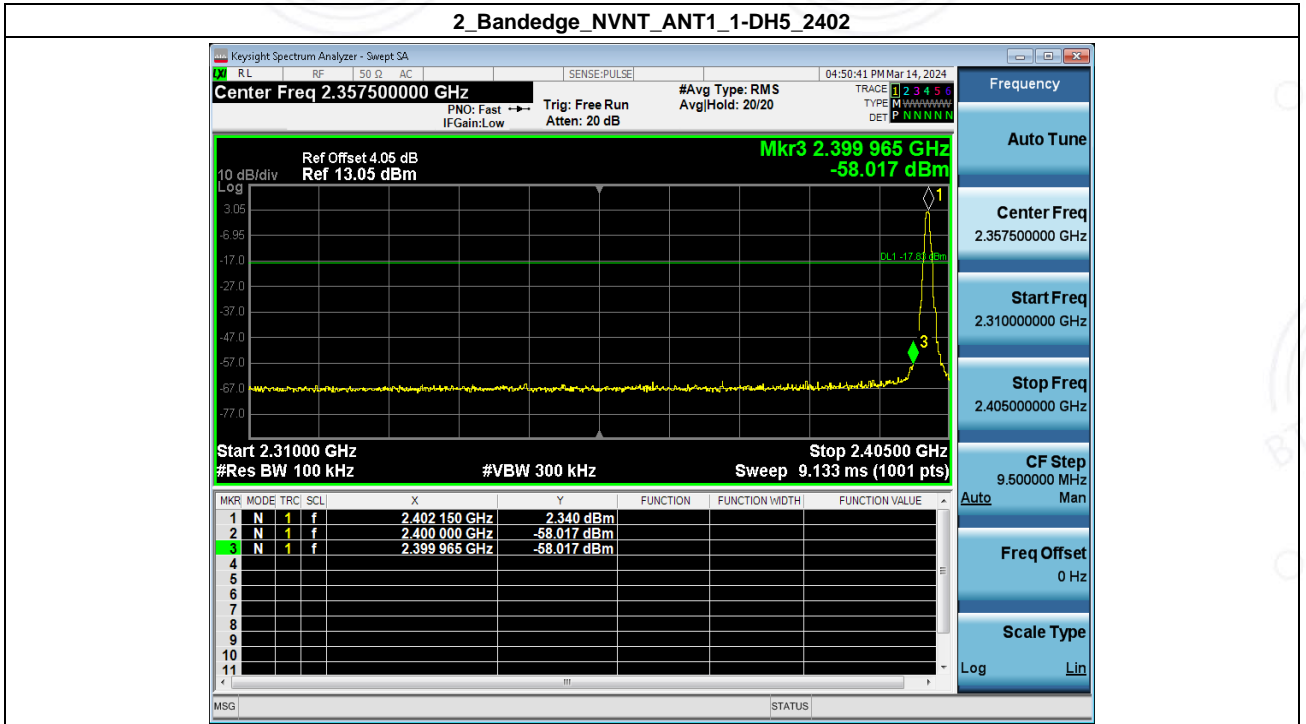


1_Reference_Level_Hopping_NVNT_ANT1_1-DH5_Hopping


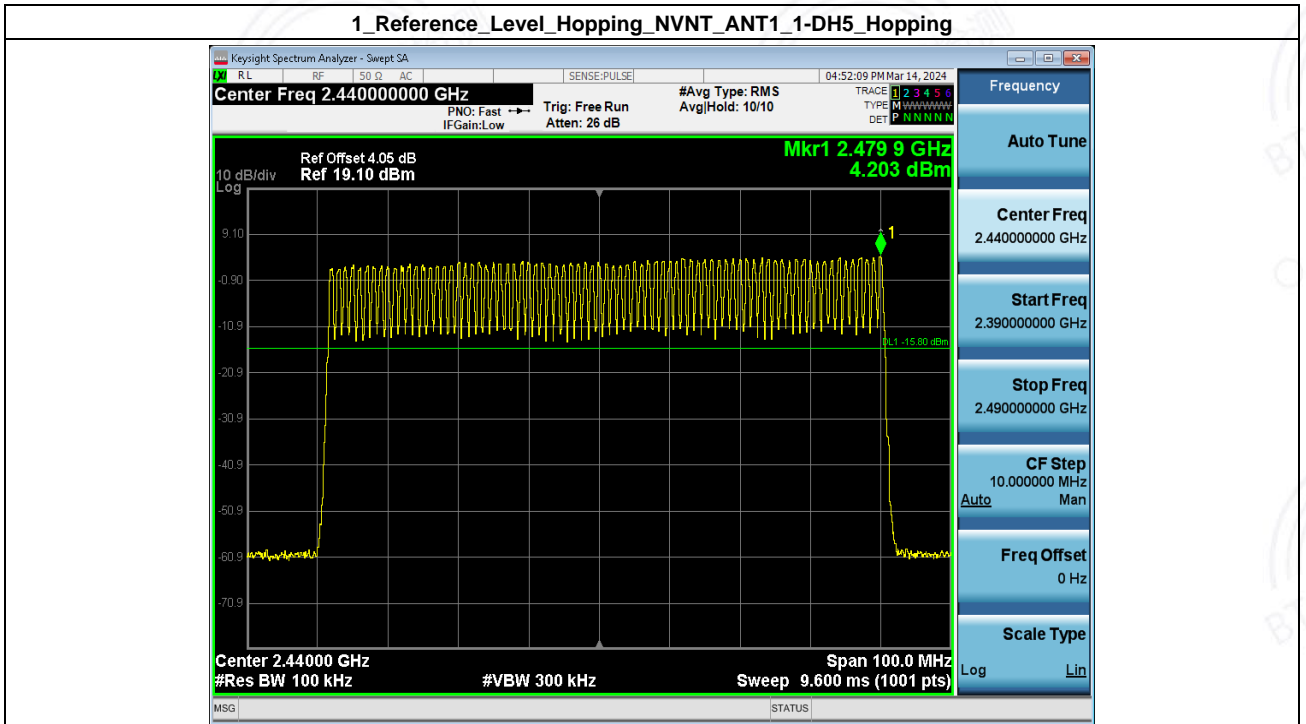


2_Band_Edge_(Hopping)_NVNT_ANT1_1-DH5_Hopping

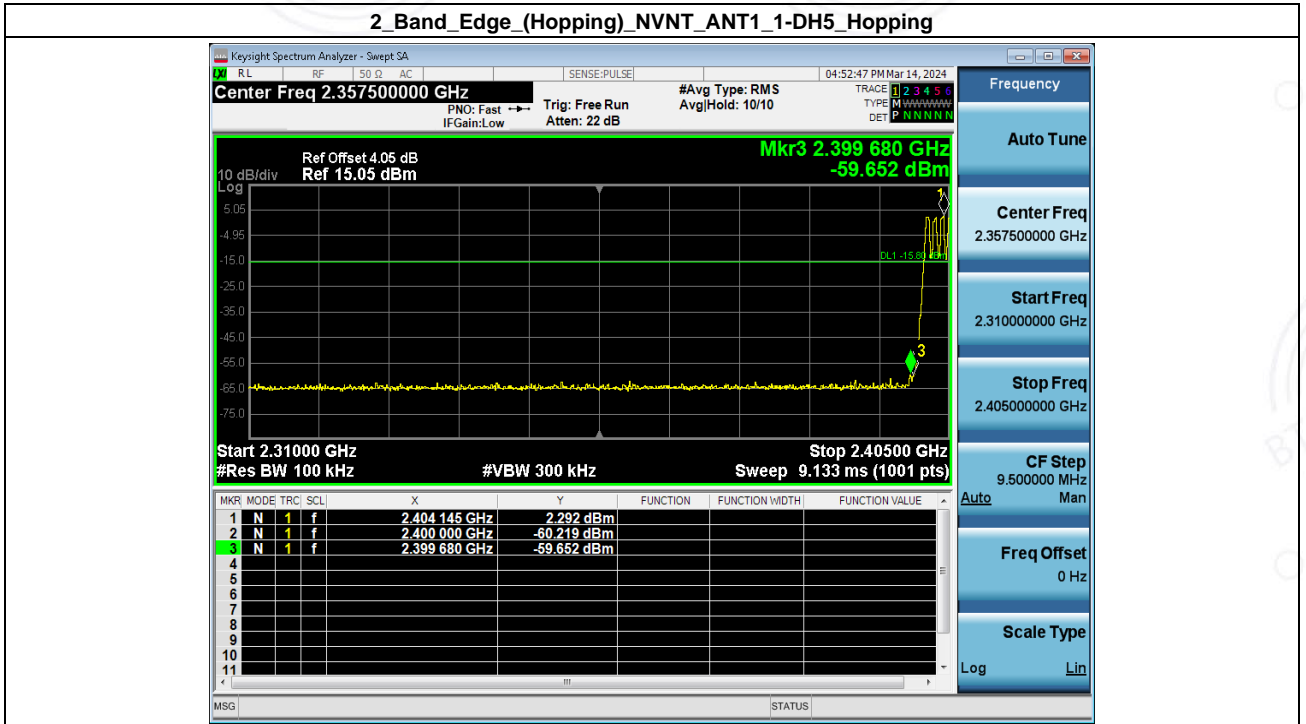


1_Reference_Level_NVNT_ANT1_1-DH5_2480

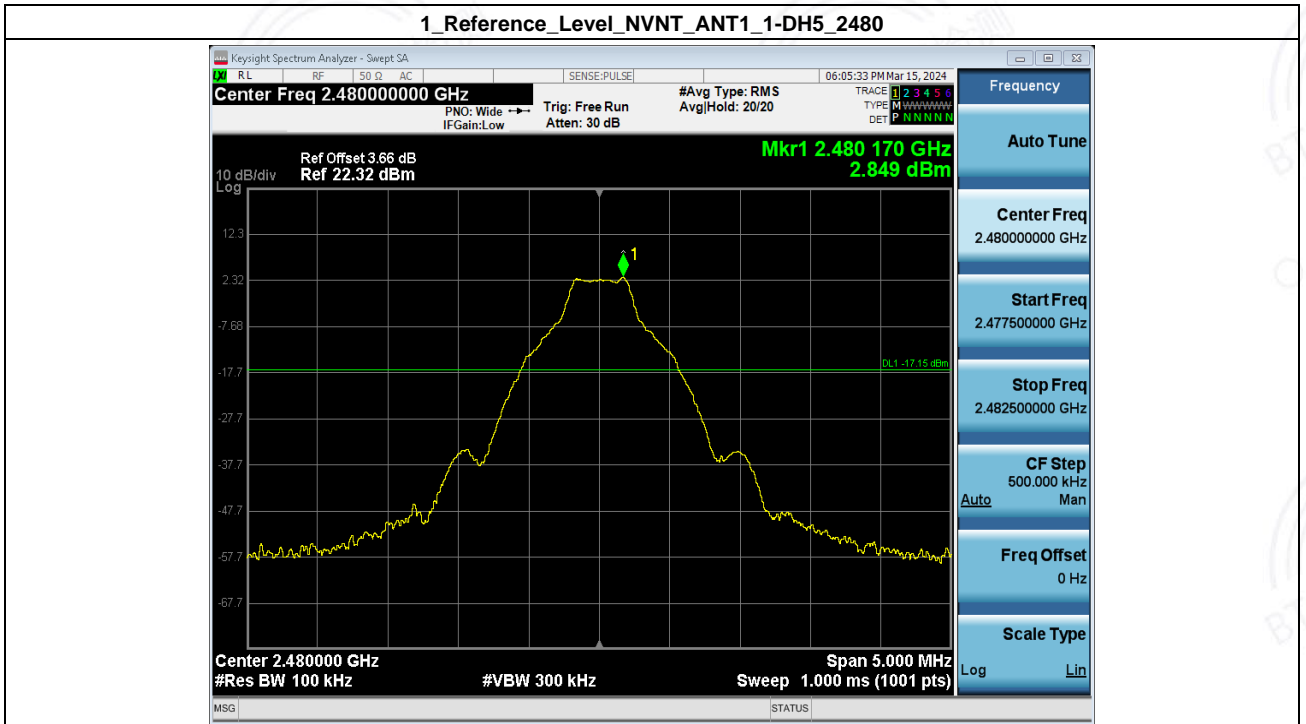


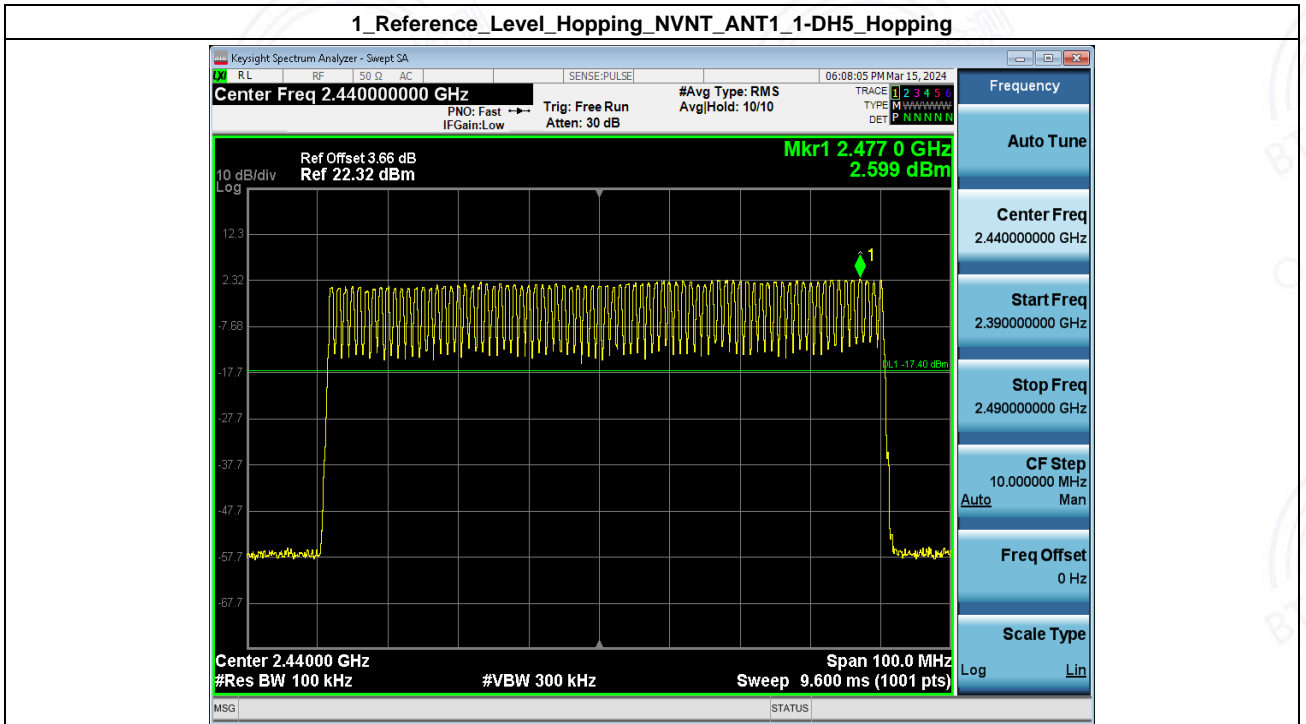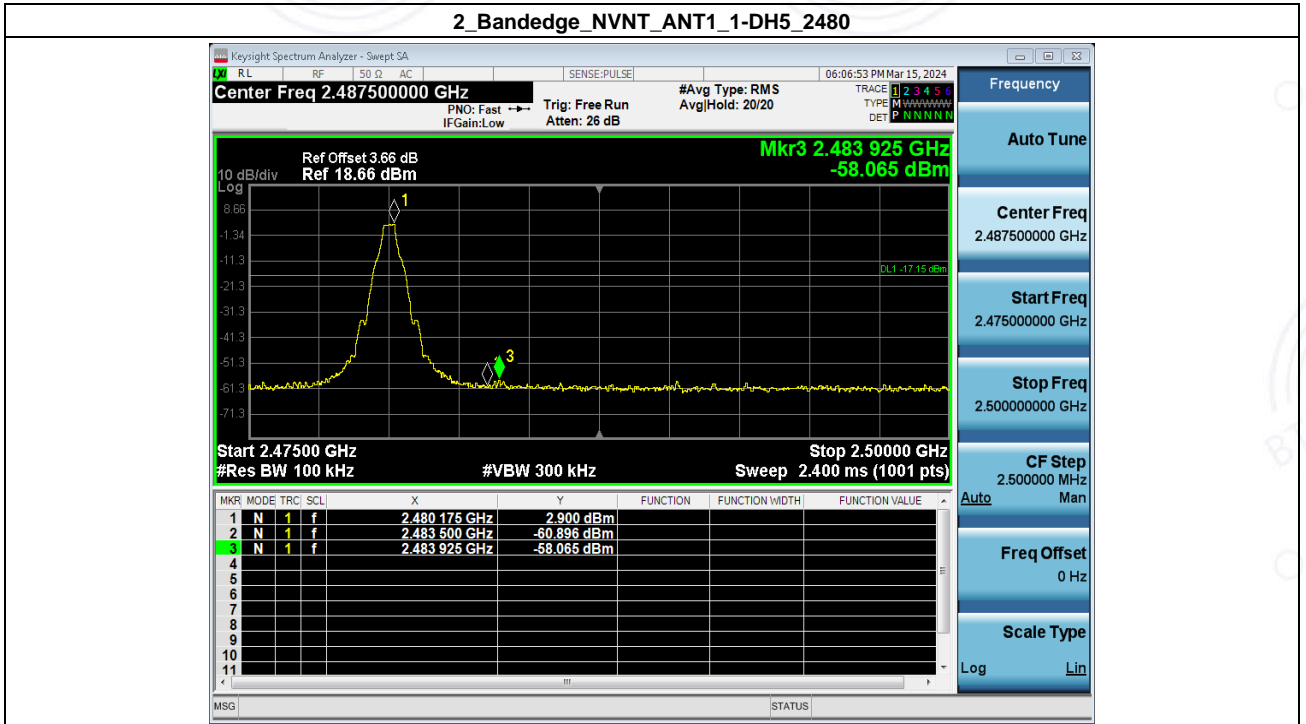


2_Band_Edge_(Hopping)_NVNT_ANT1_1-DH5_Hopping

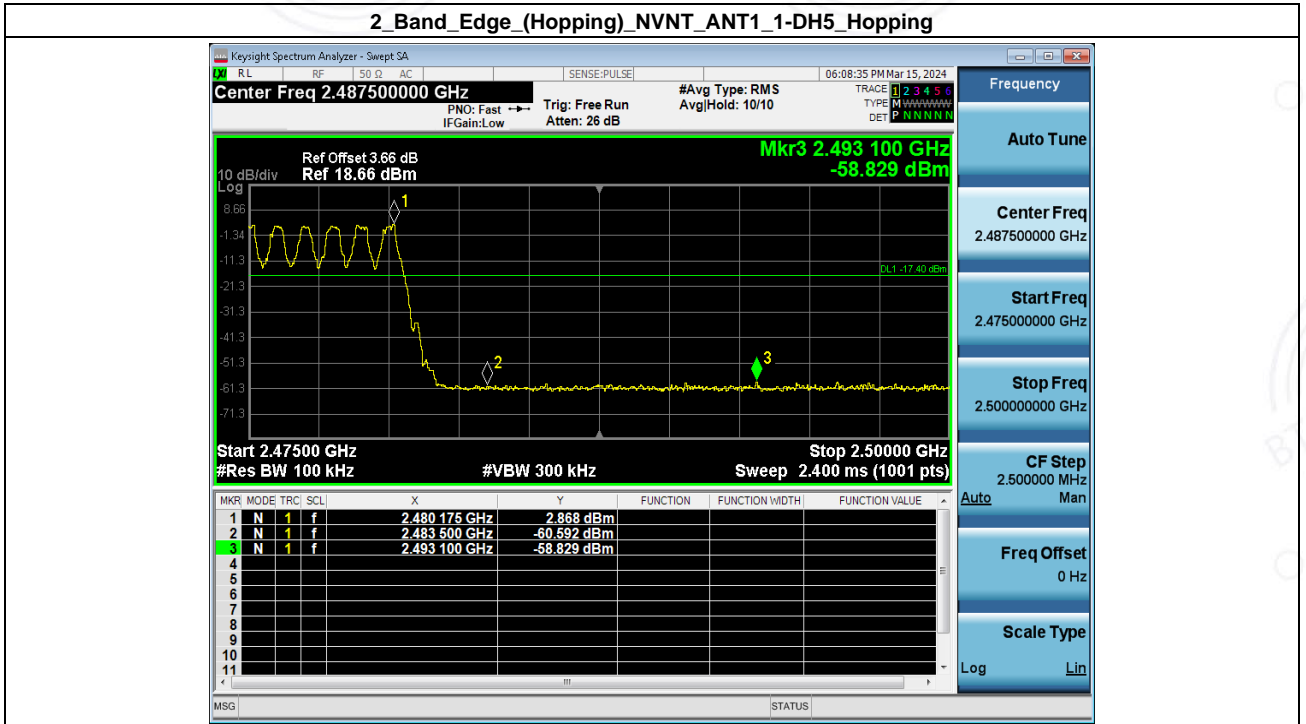


1_Reference_Level_NVNT_ANT1_2-DH5_2402

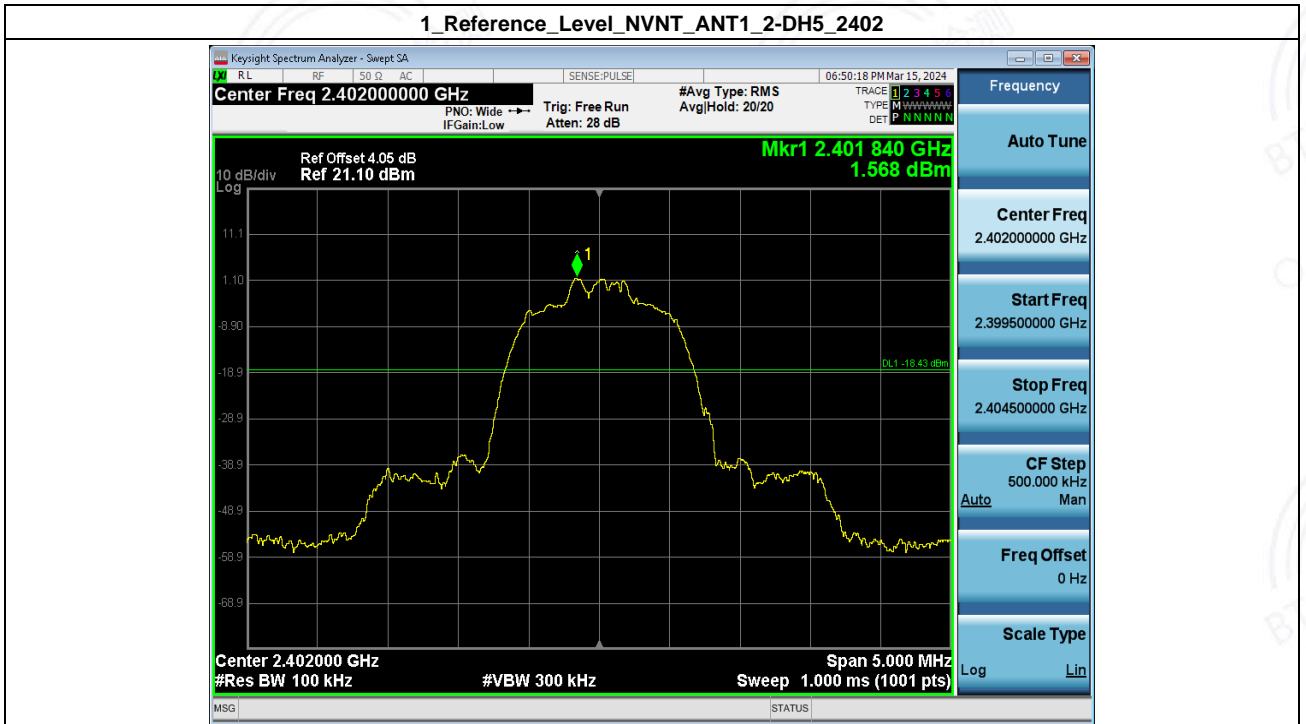


2_Bandedge_NVNT_ANT1_2-DH5_2402

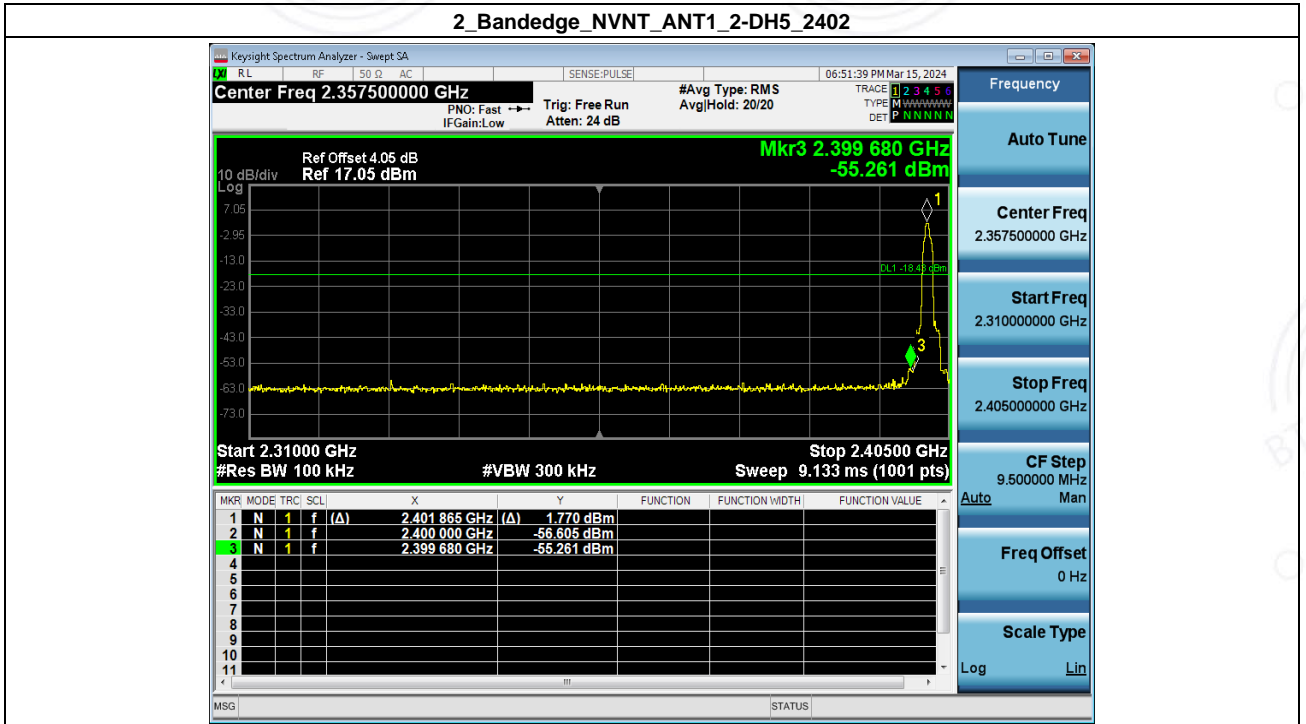


1_Reference_Level_Hopping_NVNT_ANT1_2-DH5_Hopping


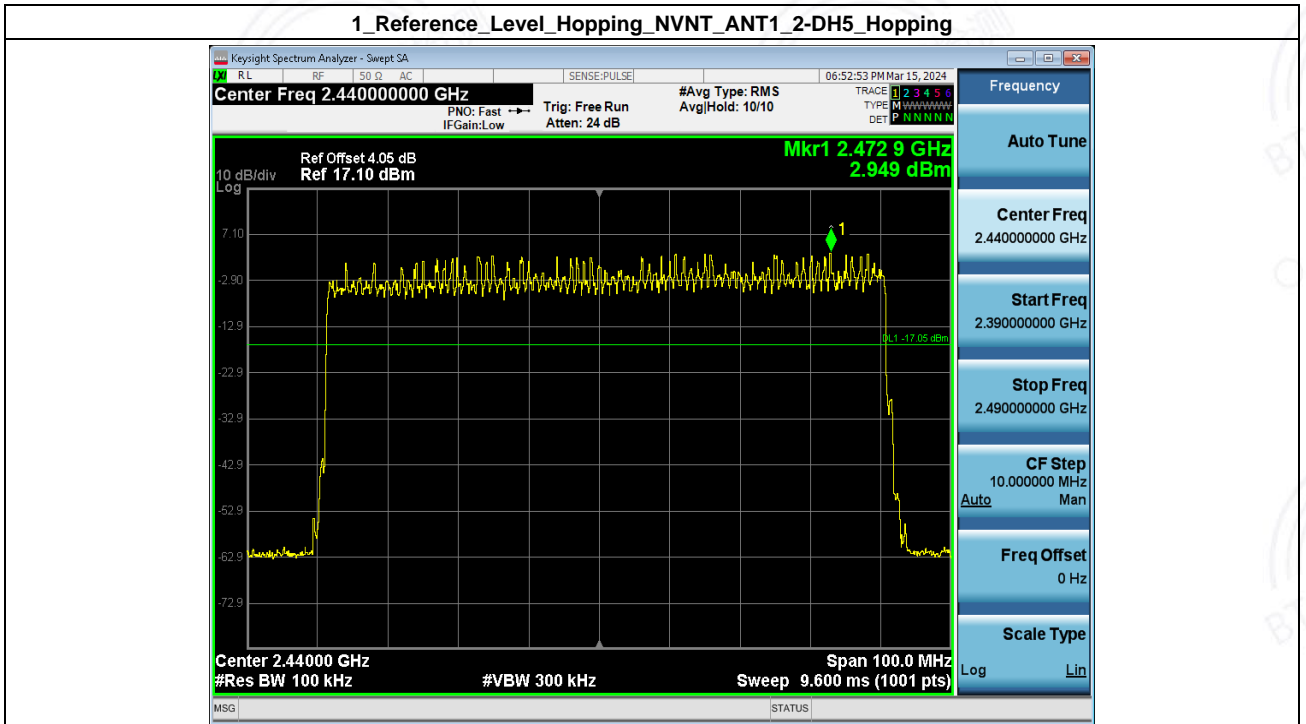




2_Band_Edge_(Hopping)_NVNT_ANT1_2-DH5_Hopping


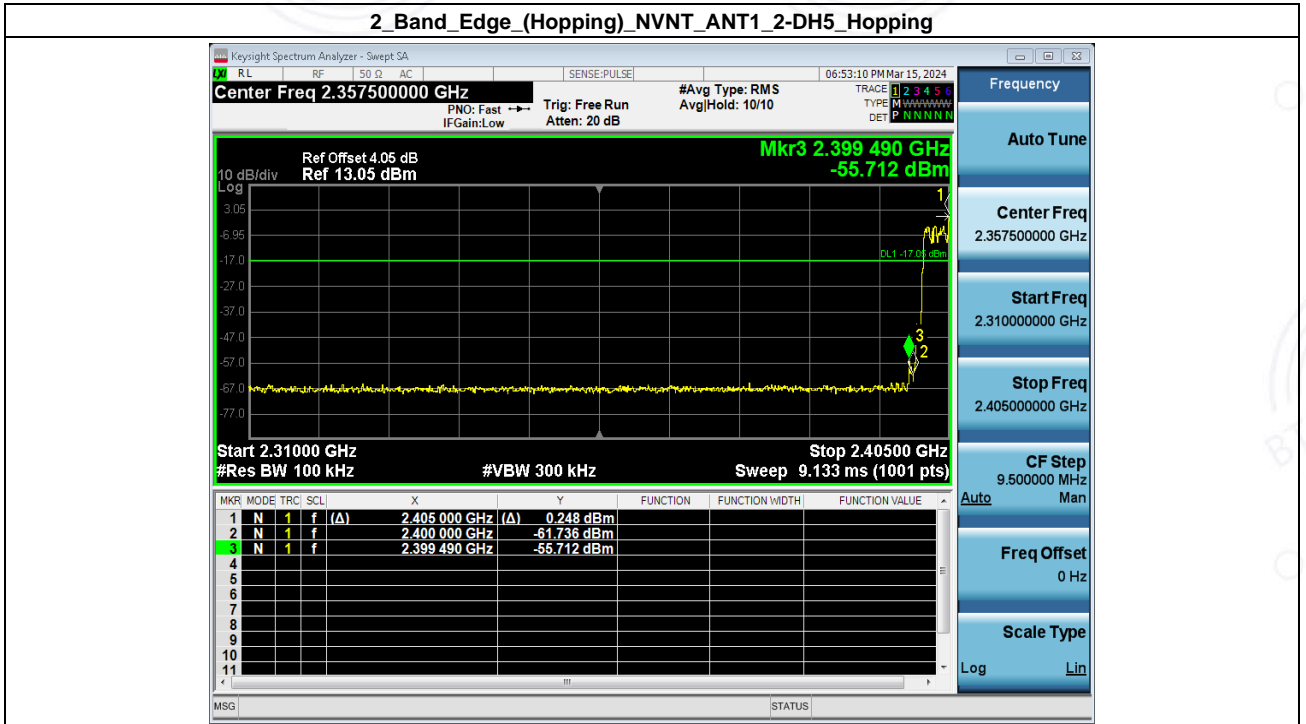




1_Reference_Level_NVNT_ANT1_2-DH5_2480


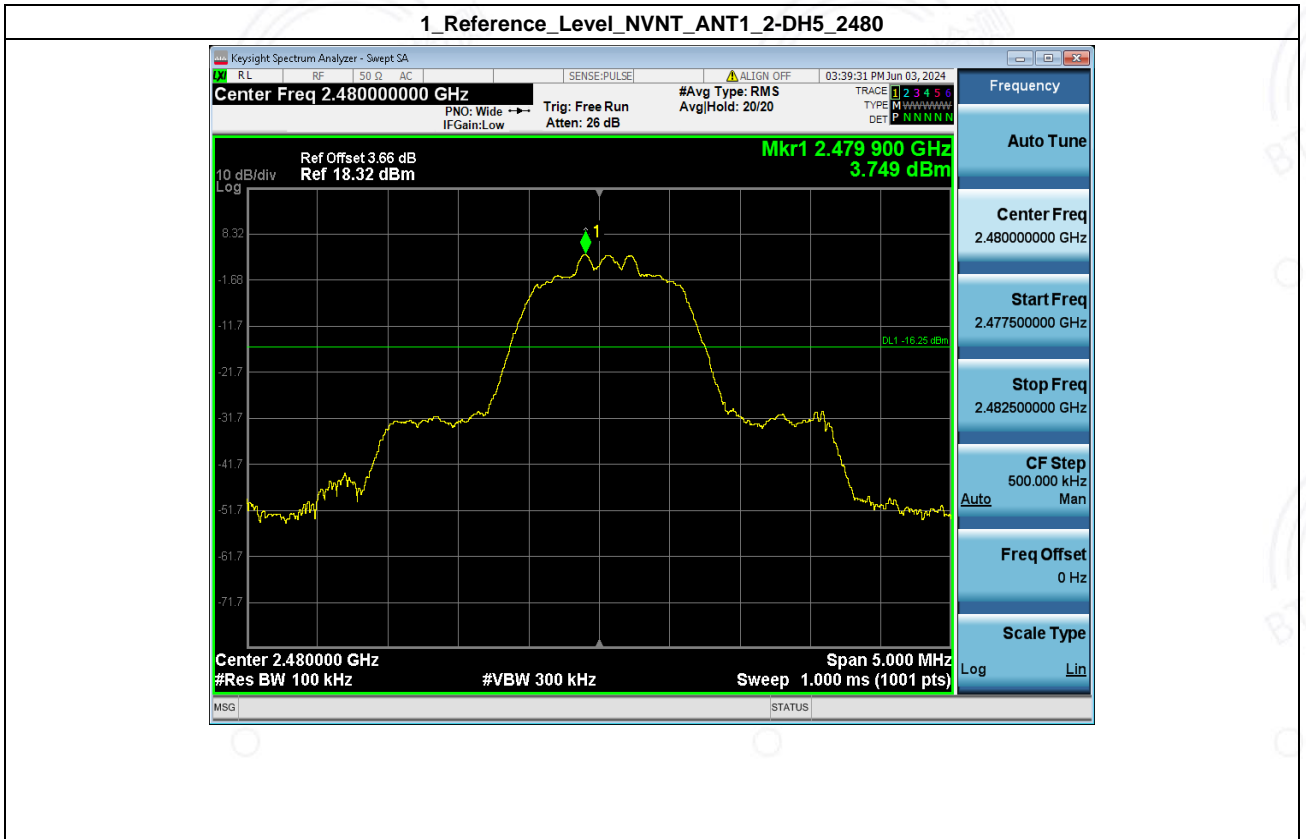


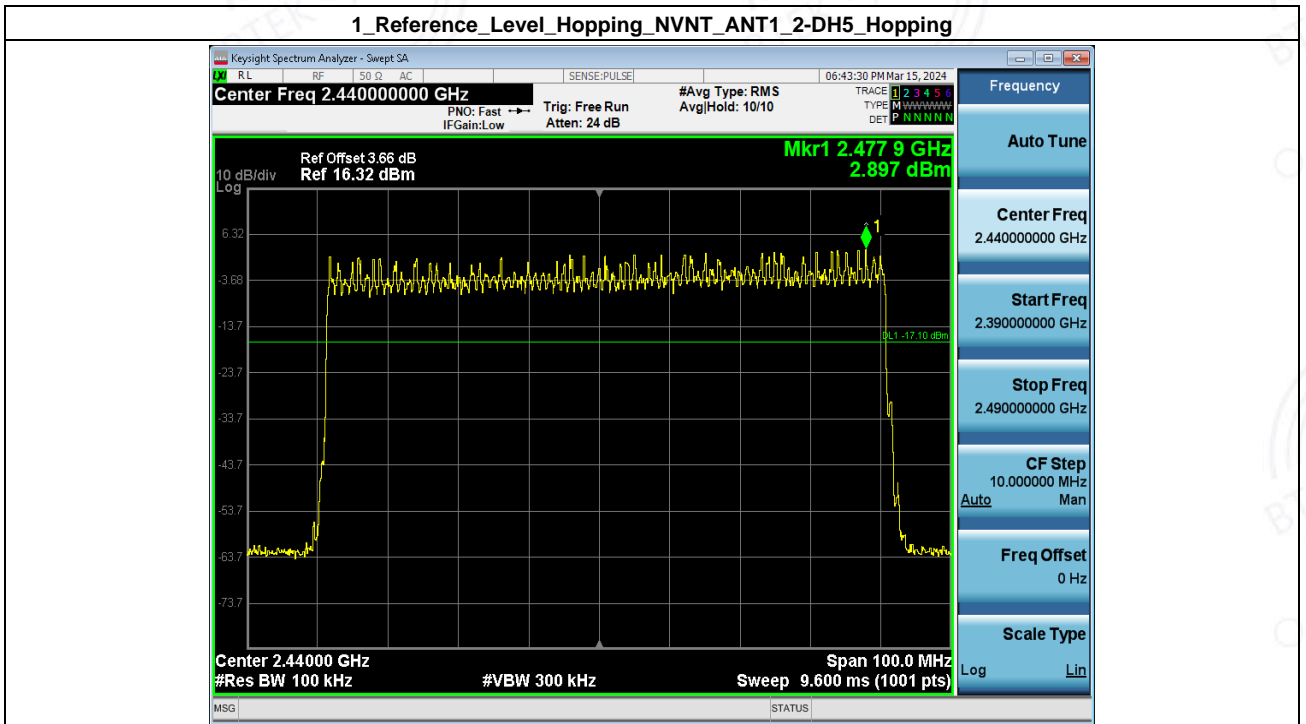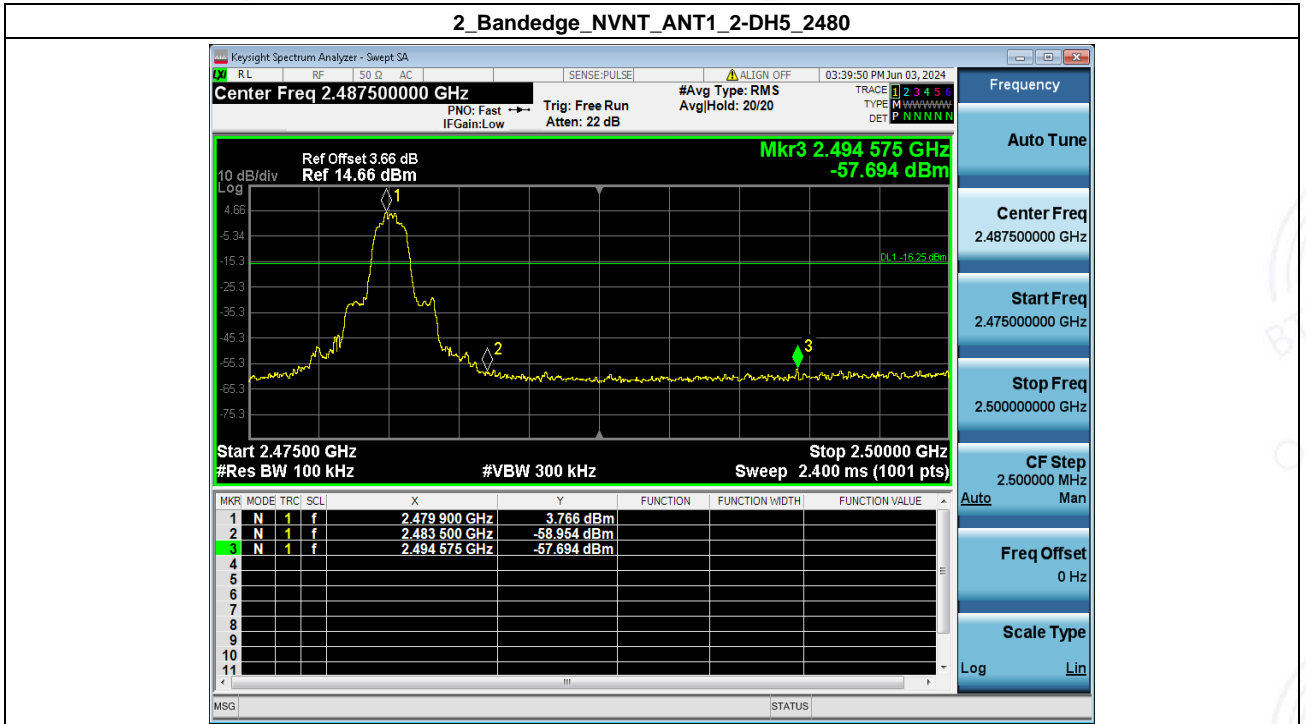


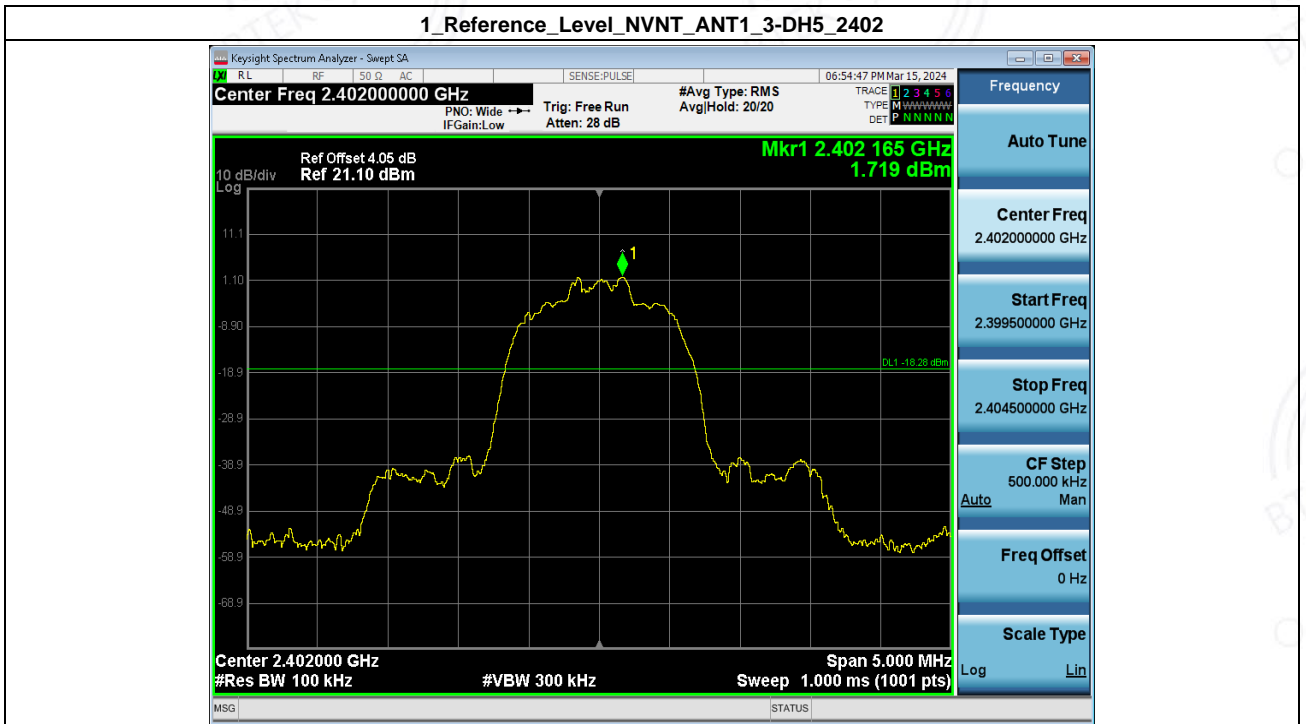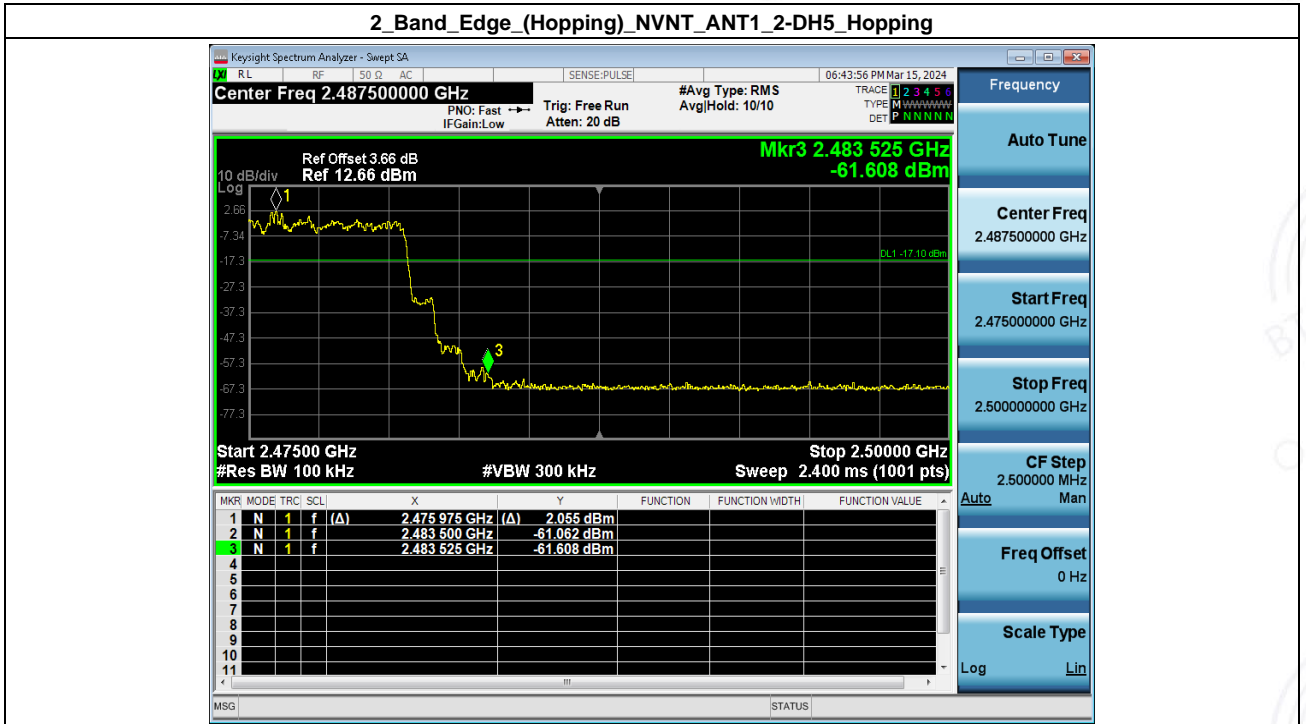

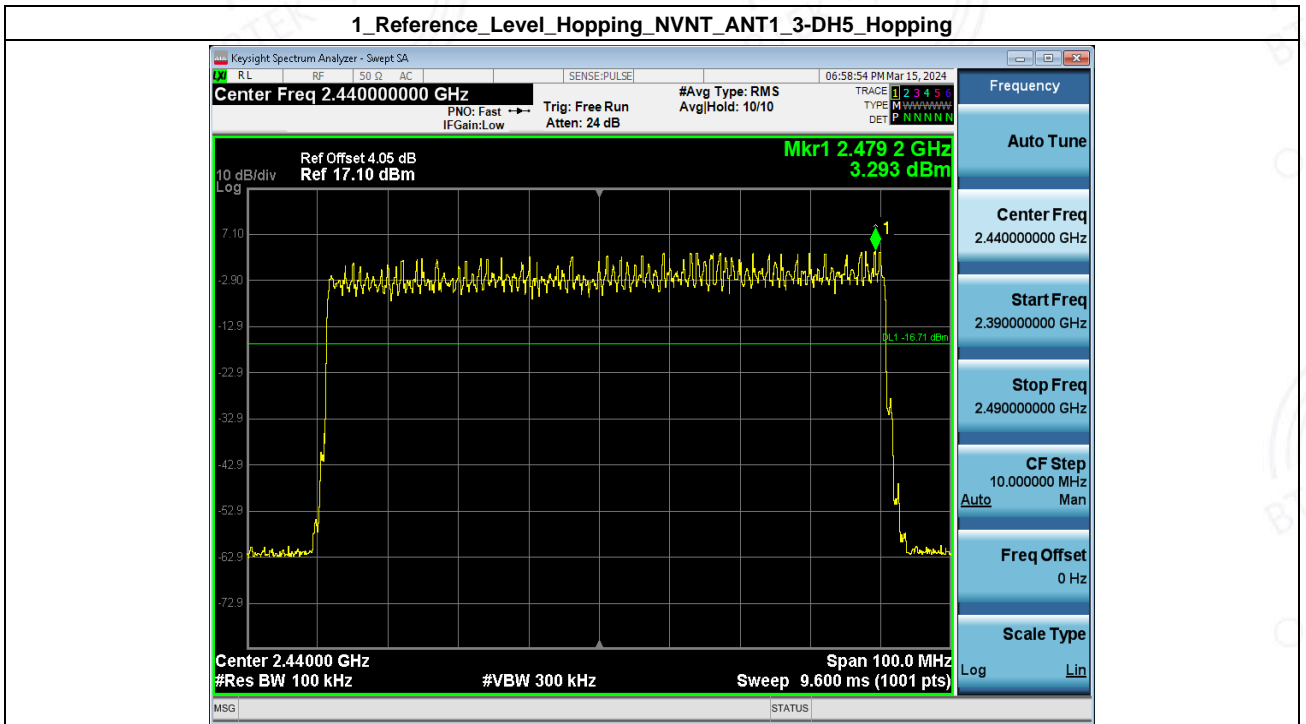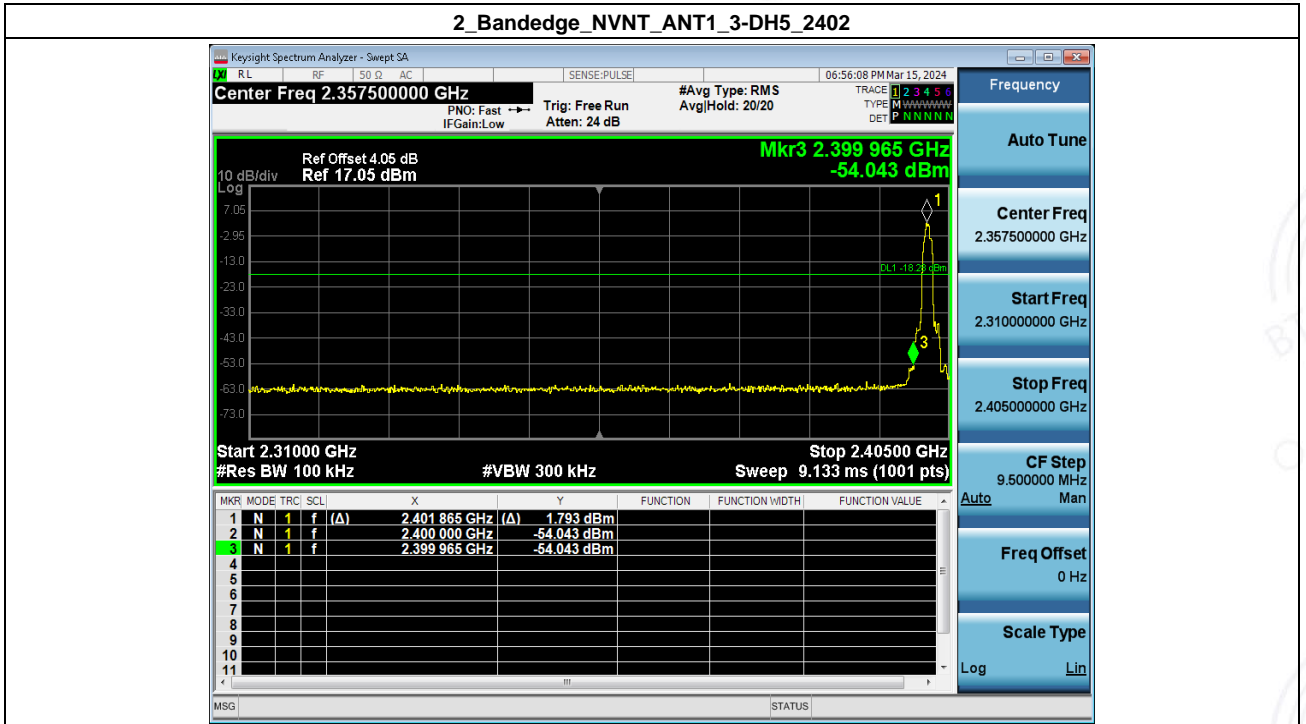

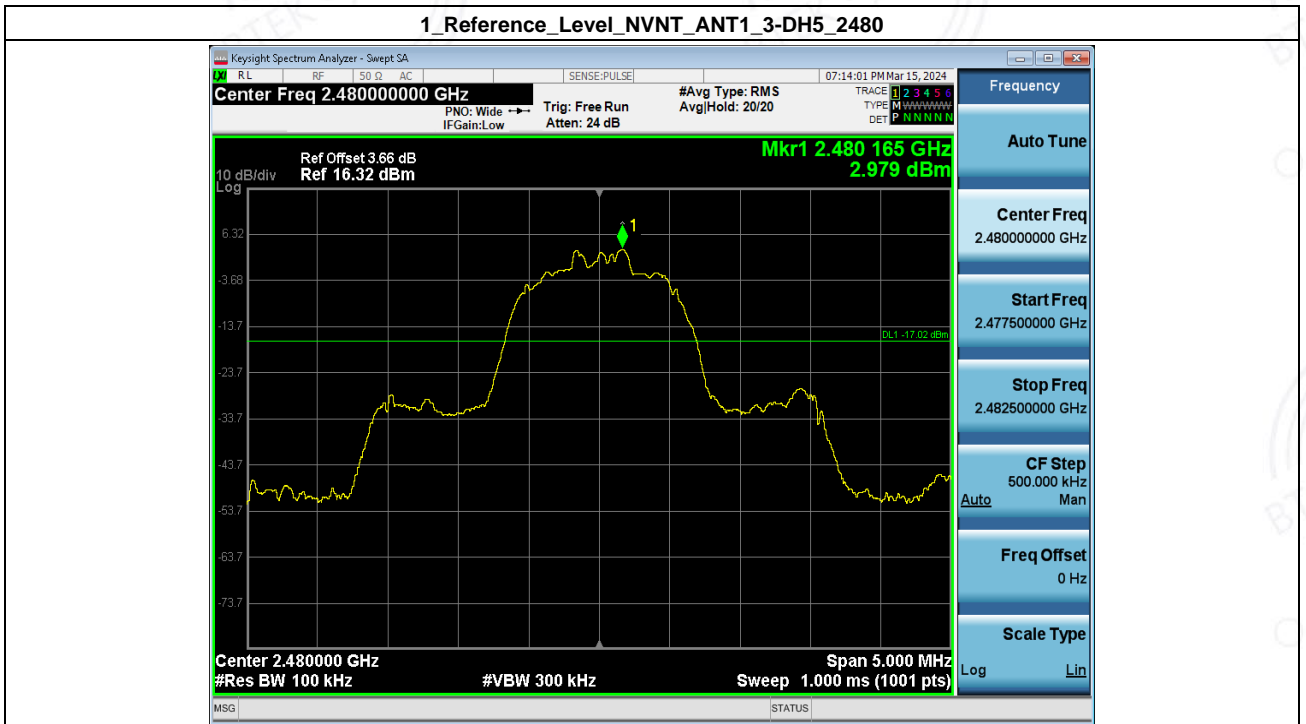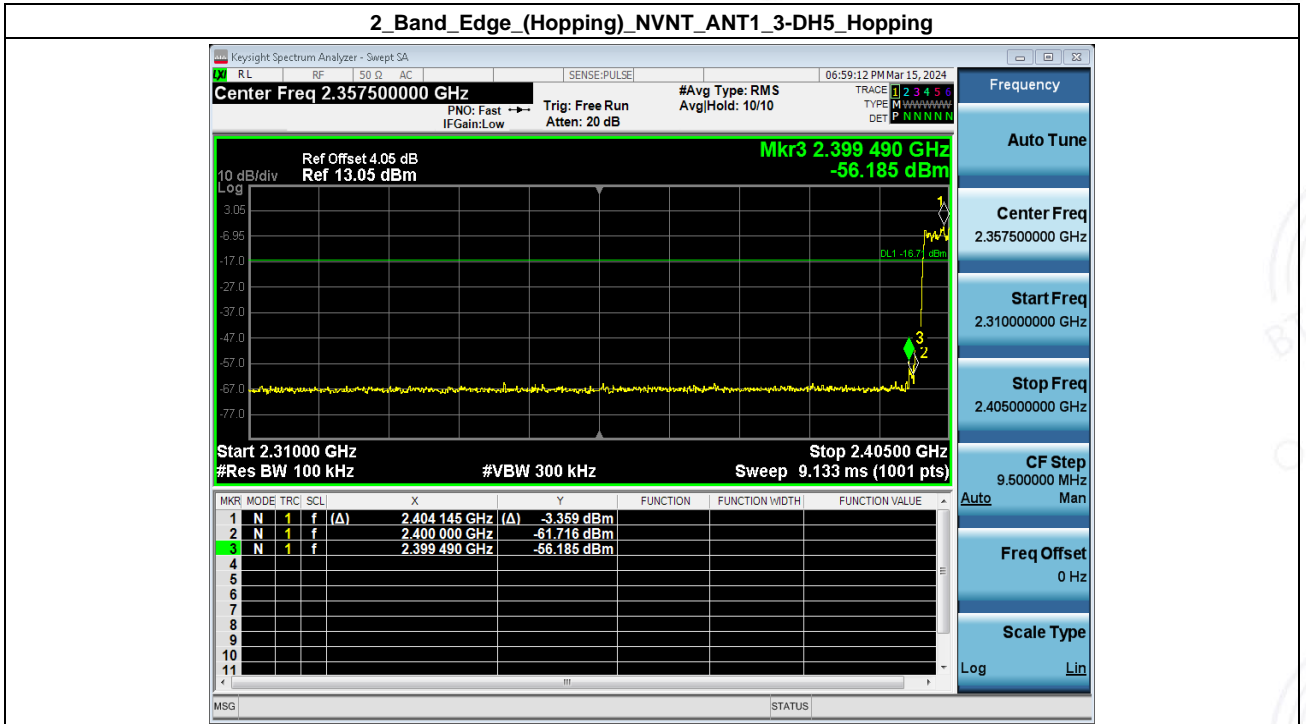


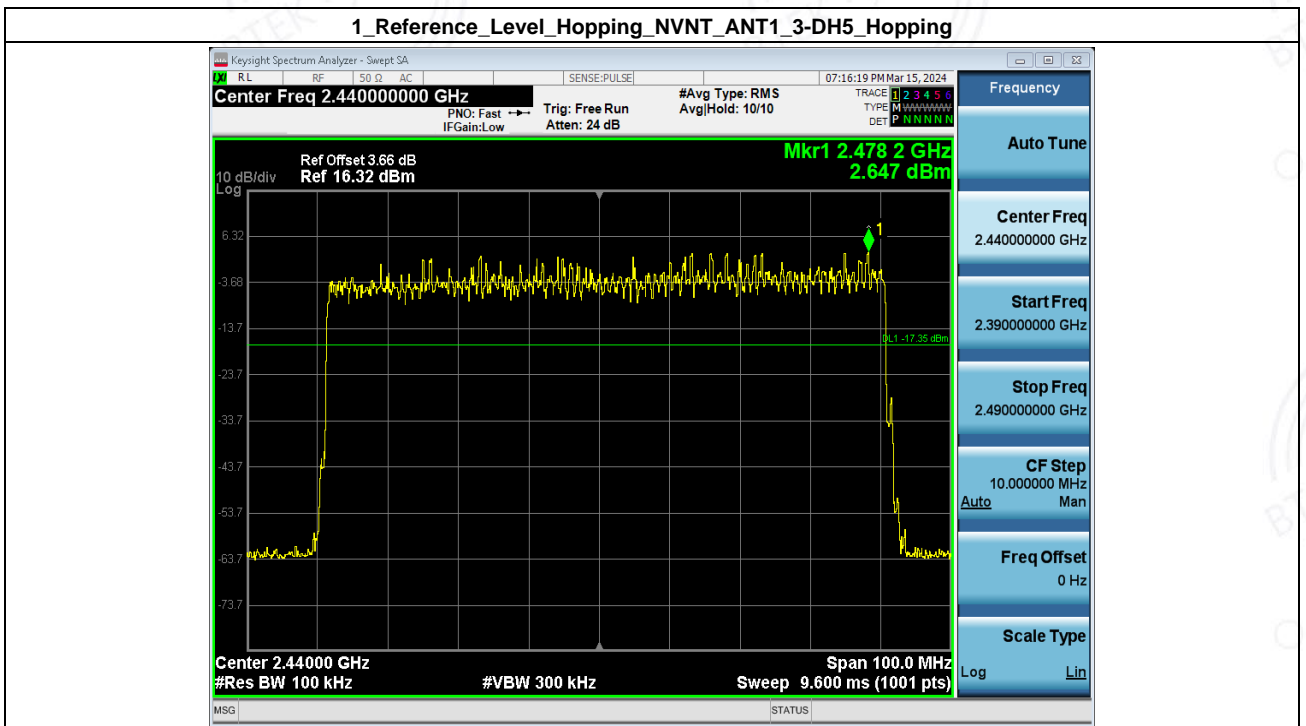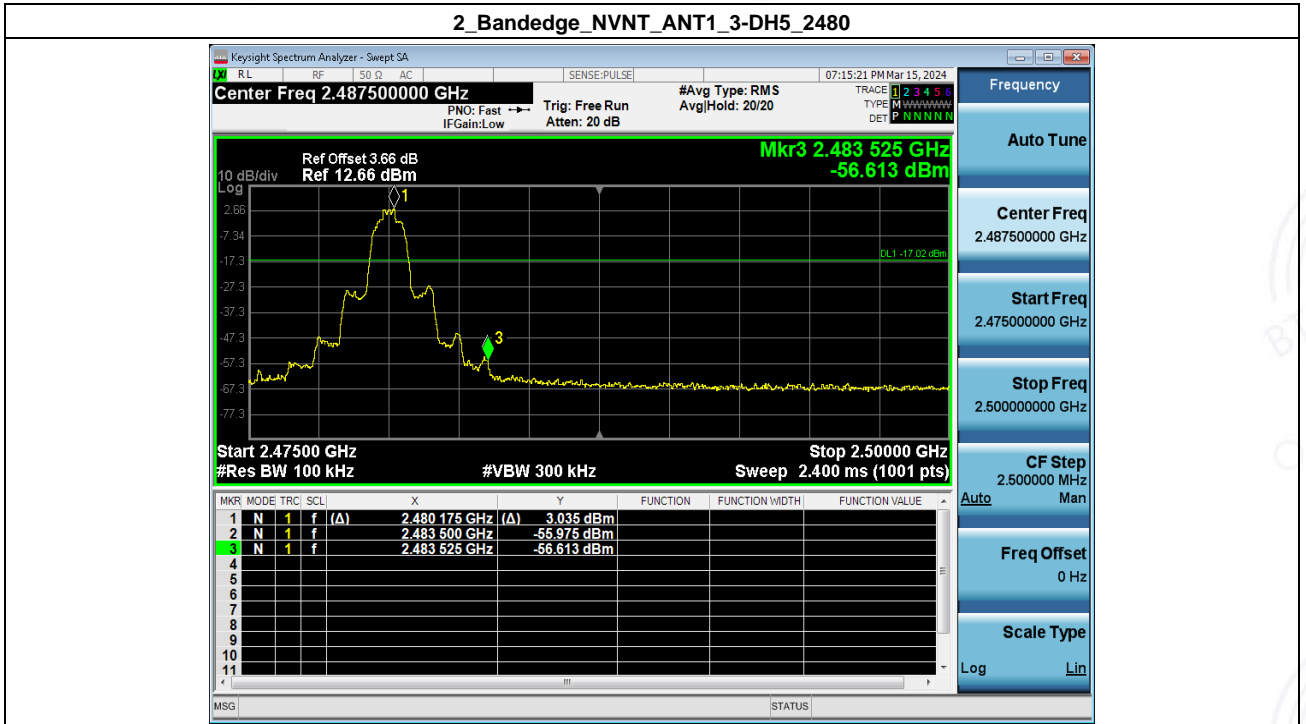


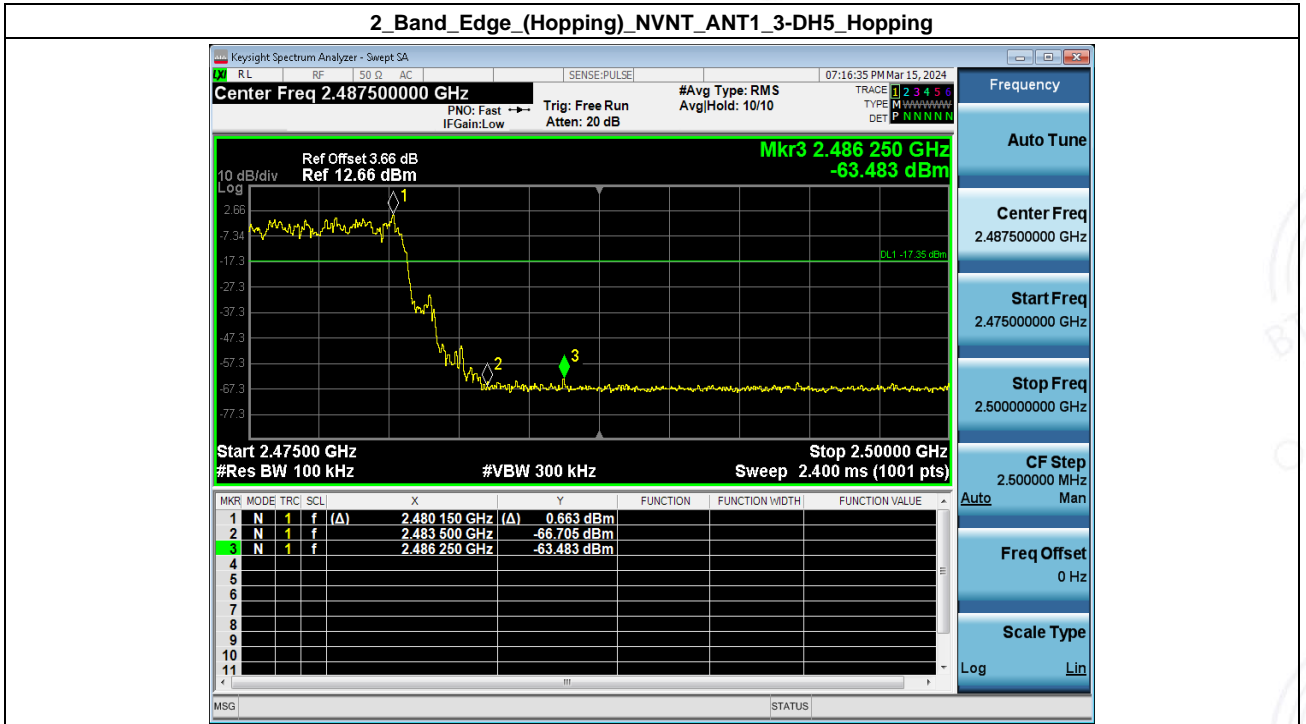

7. Carrier Frequencies Separation (Hopping)



Condition	Antenna	Modulation	Frequency(MHz)	Hopping NO.0 (MHz)	Hopping NO.1 (MHz)	Carrier Frequencies Separation(MHz)	Limit(MHz)	Result
NVNT	ANT1	1-DH5	2441.00	2441.161	2442.172	1.011	0.680	Pass
NVNT	ANT1	2-DH5	2441.00	2440.843	2441.845	1.002	0.843	Pass
NVNT	ANT1	3-DH5	2441.00	2441.161	2442.163	1.002	0.856	Pass

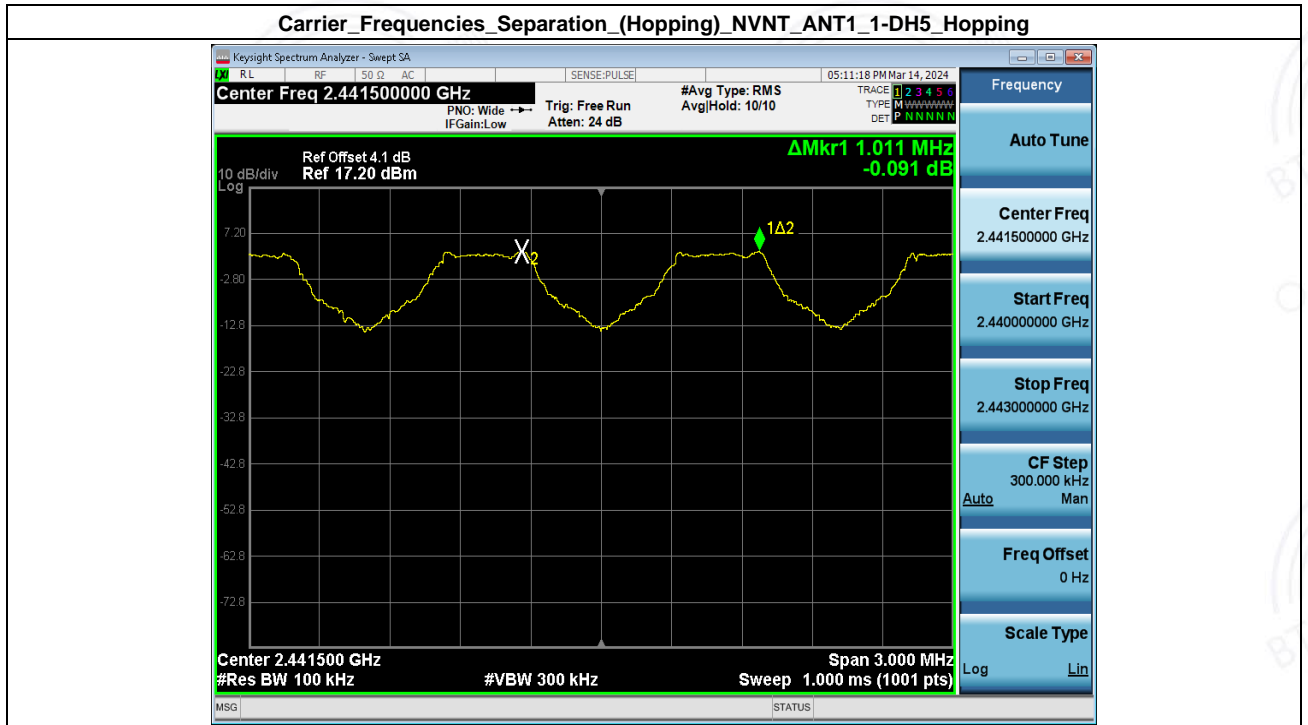


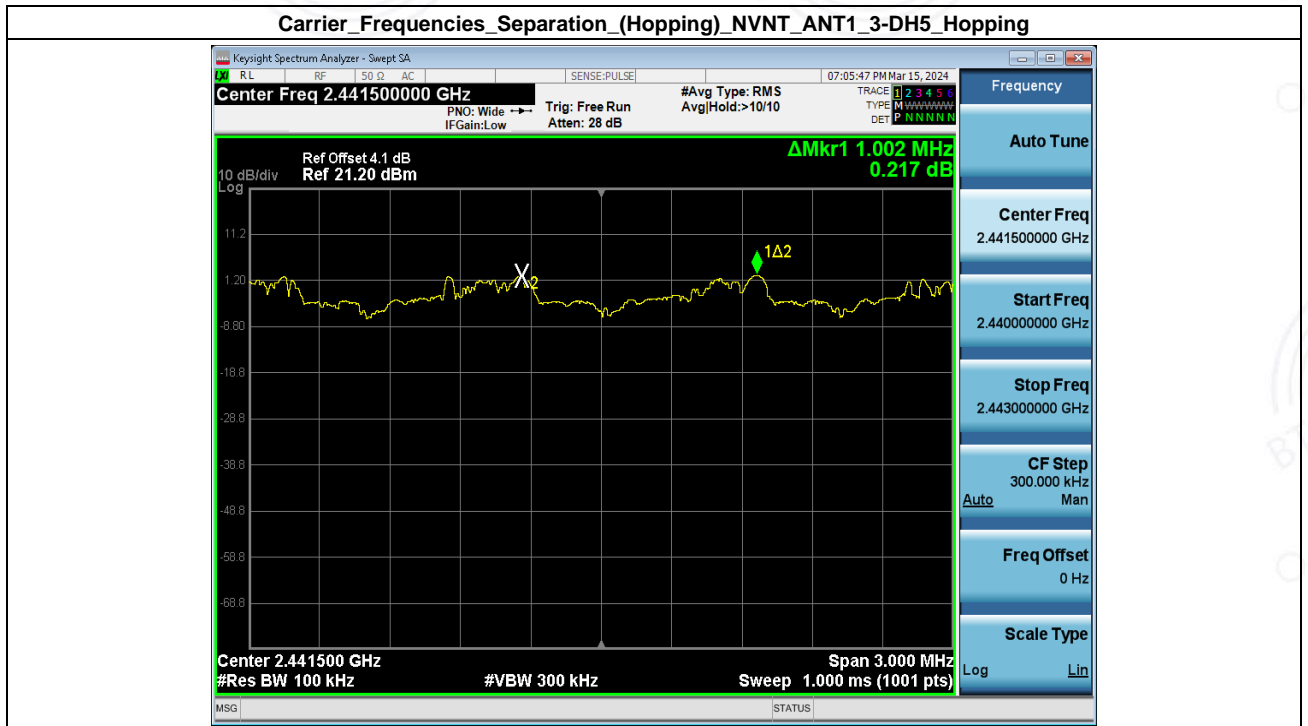

8. Number of Hopping Channel (Hopping)

Condition	Antenna	Modulation	Hopping Num	Limit	Result
NVNT	ANT1	1-DH5	79	15	Pass
NVNT	ANT1	2-DH5	79	15	Pass
NVNT	ANT1	3-DH5	79	15	Pass

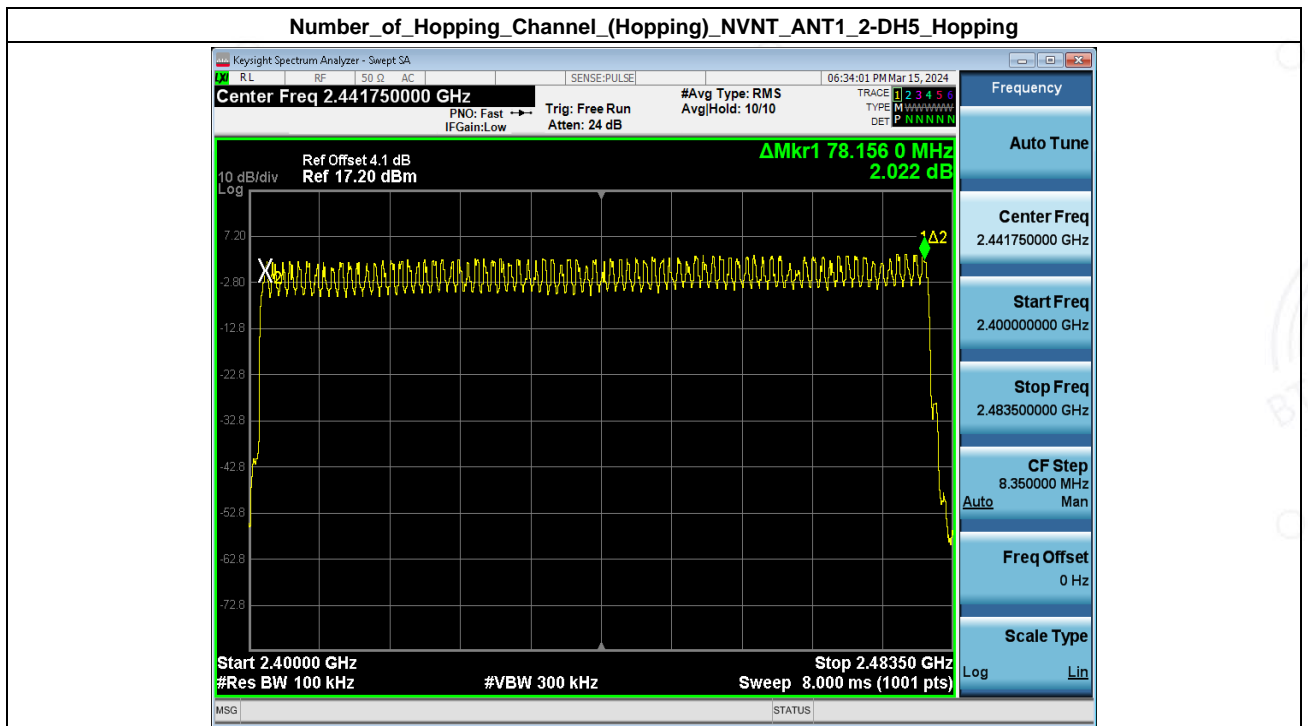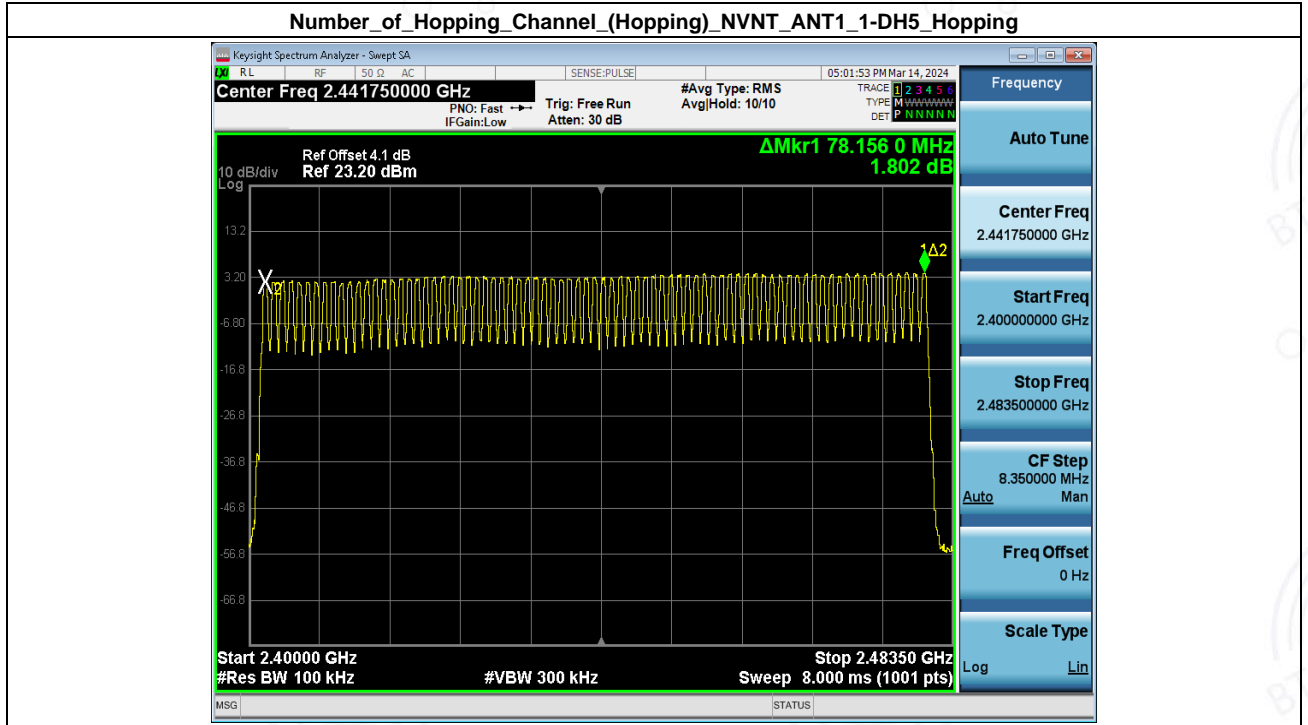

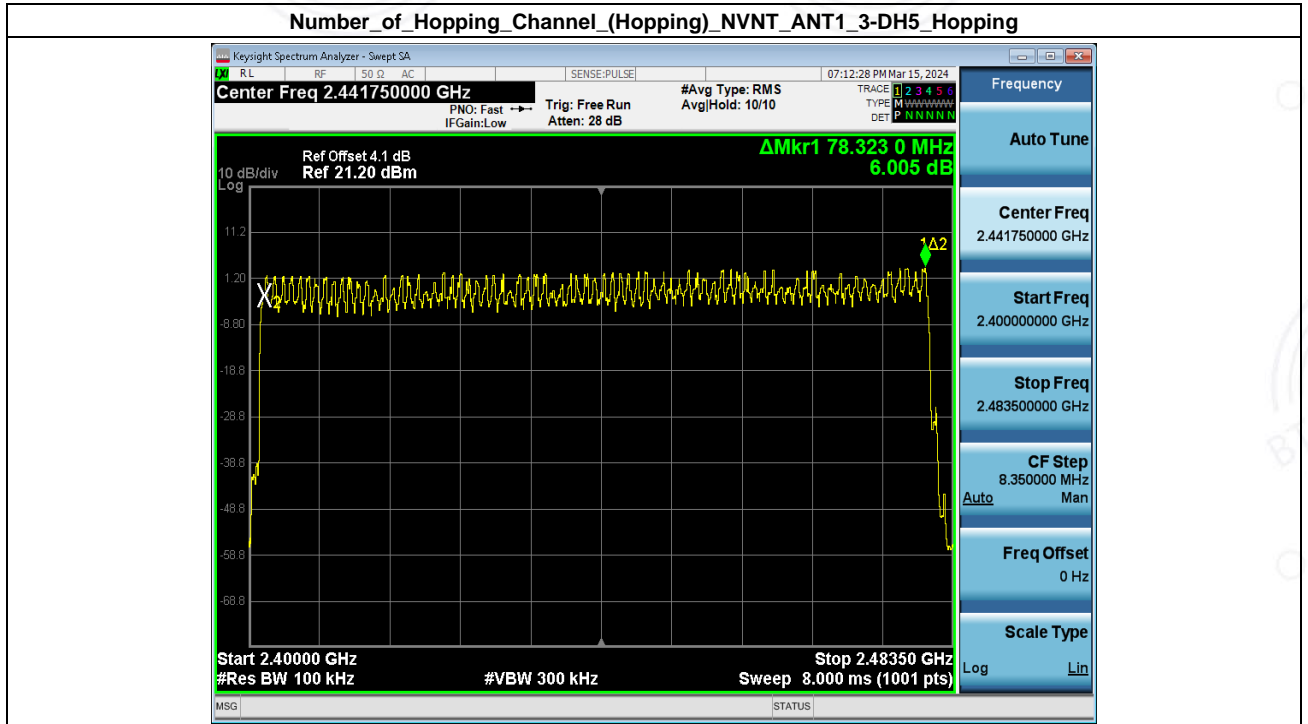

- End of the Report -

