

# **TEST REPORT**

APPLICANT	: BLU Products, Inc.
PRODUCT NAME	: Smart Phone
MODEL NAME	: G53
BRAND NAME	: BLU
FCC ID	: YHLBLUG53W851
STANDARD(S)	: 47 CFR Part 15 Subpart C
RECEIPT DATE	: 2023-10-20
TEST DATE	: 2023-10-25 to 2023-11-28
ISSUE DATE	: 2023-12-04

Yong Mi Edited by: Peng Mi (Rapporteur) Approved by: non msnem Shen Junsheng (Supervisor)

NOTE: This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Fax: 86-755-36698525 Tel: 86-755-36698555 Http://www.morlab.cn E-mail: service@morlab.cn



# DIRECTORY

1. S	Summary of Test Result ······· 4
1.1.	Testing Applied Standards 5
1.2.	Test Equipment List ······ 6
1.3.	Measurement Uncertainty
1.4.	Testing Laboratory 8
2. 0	Seneral Description ······9
2.1.	Information of Applicant and Manufacturer9
2.2.	Information of EUT······9
2.3.	Channel List of EUT ······10
2.4.	Test Configuration of EUT ······11
2.5.	Test Conditions11
2.6.	Test Setup Layout Diagram ······11
3. Т	est Results ······14
3.1.	Antenna Requirement ······14
3.2.	Duty Cycle of Test Signal15
3.3.	Maximum Peak Conducted Output Power ······16
3.4.	Maximum Average Conducted Output Power ······17
3.5.	6 dB Bandwidth ······18
3.6.	Conducted Spurious Emissions and Band Edge19
	Power Spectral Density20
3.8.	Conducted Emission ······21
3.9.	Restricted Frequency Bands22
3.10.	Radiated Emission ······23
Anne	ex A Test Data and Result ······25





Change History				
Version Date		Reason for change		
1.0 2023-12-04		First edition		



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn

E-mail: service@morlab.cn



# 1. Summary of Test Result

No.	Section	Description	Test Date	Test Engineer	Result	Method Determination /Remark
1	15.203	Antenna Requirement	N/A	N/A	PASS	No deviation
2	N/A	Duty Cycle of Test Signal	Nov. 01, 2023	Su Xiaoxian	PASS	No deviation
3	15.247(b)	Maximum Peak Conducted Output Power	Nov. 01, 2023	Su Xiaoxian	PASS	No deviation
4	15.247(b)	Maximum Average Conducted Output Power	Nov. 01, 2023	Su Xiaoxian	PASS	No deviation
5	15.247(a)	Bandwidth	Oct. 25, 2023	Su Xiaoxian	PASS	No deviation
6	15.247(d)	Conducted Spurious Emission and Band Edge	Nov. 07, 2023	Su Xiaoxian	PASS	No deviation
7	15.247(e)	Power Spectral Density	Oct. 25, 2023	Su Xiaoxian	PASS	No deviation
8	15.207	Conducted Emission	Oct. 25&26, 2023	Wang Deyong	PASS	No deviation
9	15.247(d)	Restricted Frequency Bands	Nov. 13, 2023	Gao Jianrou	PASS	No deviation
10	15.209, 15.247(d)	Radiated Emission	Nov. 03, 2023	Gao Jianrou	PASS	No deviation

**Note 1:** The tests were performed according to the method of measurements prescribed in ANSI C63.10-2013 and KDB558074 D01 v05r02.

**Note 2:** Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.

**Note 3:** When the test result is a critical value, we will use the measurement uncertainty give the judgment result based on the 95% confidence intervals.





### **1.1. Testing Applied Standards**

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

• 47 CFR Part 15 Subpart C Radio Frequency Devices



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn

E-mail: service@morlab.cn



### 1.2. Test Equipment List

### **1.2.1 Conducted Test Equipments**

Equipment Name	Serial No.	Туре	Manufacturer	Cal. Date	Due Date
EXA Signal Analzyer	MY53470836	N9010A	Agilent	2023.02.27	2024.02.26
RF Cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
Coaxial Cable	CB02	RF02	Morlab	N/A	N/A
SMA Connector	CN01	RF03	HUBER-SUHNER	N/A	N/A

### 1.2.2 Conducted Emission Test Equipments

Equipment Name	Serial No.	Туре	Manufacturer	Cal. Date	Due Date
Receiver	MY56400093	N9038A	KEYSIGHT	2023.02.09	2024.02.08
LISN	8127449	NSLK 8127	Schwarzbeck	2023.02.21	2024.02.20
Pulse Limiter (10dB)	VTSD 9561 F-B #206	VTSD 9561-F	Schwarzbeck	2023.06.27	2024.06.26
RF Coaxial Cable (DC-100MHz)	BNC	MRE04	Qualwave	N/A	N/A

### 1.2.3 List of Software Used

Description	Manufacturer	Software Version
Test System	MaiWei	2.0.0.0
Morlab EMCR	Morlab	V1.2
TS+ -[JS32-CE]	Tonscend	V2.5.0.0



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525 E-mail: service@morlab.cn

Http://www.morlab.cn

\_



### 1.2.4 Radiated Test Equipments

Equipment	Equipment Serial No.		Manufacturer	Cal. Date	Due Date
Name		Туре	Manalacturer		Bue Bute
Receiver	MY54130016	N9038A	Agilent	2023.06.21	2024.06.20
Test Antenna - Bi-Log	9163-519	VULB 9163	Schwarzbeck	2023.07.01	2024.06.30
Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2023.06.26	2024.06.25
Test Antenna – Horn	01774	BBHA 9120D	Schwarzbeck	2023.07.01	2024.06.30
Test Antenna – Horn	BBHA9170 #773	BBHA9170	Schwarzbeck	2023.07.01	2024.06.30
Preamplifier (10MHz-6GHz)	46732	S10M100L38 02	LUCIX CORP.	2023.06.27	2024.06.26
Preamplifier (2GHz-18GHz)	61171/61172	S020180L32 03	LUCIX CORP.	2023.06.27	2024.06.26
Preamplifier (18GHz-40GHz)	DS77209	DCLNA0118- 40C-S	Decentest	2023.07.04	2024.07.03
RF Coaxial Cable (DC-18GHz)	MRE001	PE330	Pasternack	2023.06.27	2024.06.26
RF Coaxial Cable (DC-18GHz)	MRE002	CLU18	Pasternack	2023.06.27	2024.06.26
RF Coaxial Cable (DC-18GHz)	MRE003	CLU18	Pasternack	2023.06.27	2024.06.26
RF Coaxial Cable (DC-40GHz)	22290045	QA360-40-K K-0.5	Qualwave	2023.07.04	2024.07.03
RF Coaxial Cable (DC-40GHz)	22290046	QA360-40-K KF-2	Qualwave	2023.07.04	2024.07.03
RF Coaxial Cable (DC-18GHz)	22120181	QA500-18-N N-5	Qualwave	2023.07.04	2024.07.03
Notch Filter	N/A	WRCG-2400- 2483.5-60SS	Wainwright	N/A	N/A
Anechoic Chamber	N/A	9m*6m*6m	CRT	2022.05.10	2025.05.09



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

E-mail: service@morlab.cn





### **1.3. Measurement Uncertainty**

Test Items	Uncertainty	Remark
Peak Output Power	±2.22dB	Confidence levels of 95%
Power Spectral Density	±2.22dB	Confidence levels of 95%
Bandwidth	±5%	Confidence levels of 95%
Conducted Spurious Emission	±2.77dB	Confidence levels of 95%
Restricted Frequency Bands	±5%	Confidence levels of 95%
Radiated Emission	±2.95dB	Confidence levels of 95%
Conducted Emission	±2.44dB	Confidence levels of 95%

### 1.4. Testing Laboratory

Laboratory Name	Shenzhen Morlab Communications Technology Co., Ltd.	
Laboratory Address	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong	
	Province, P. R. China	
Telephone	+86 755 36698555	
Facsimile	+86 755 36698525	
FCC Designation Number	CN1192	
FCC Test Firm	226174	
Registration Number	220174	





# 2. General Description

### 2.1. Information of Applicant and Manufacturer

Applicant	pplicant BLU Products, Inc.	
Applicant Address 8600 NW 36th Street, Suite #200 Doral, FL 33166, USA		
Manufacturer	urer BLU Products, Inc.	
Manufacturer Address	8600 NW 36th Street, Suite #200 Doral, FL 33166, USA	

### 2.2. Information of EUT

Product Name:	Smart Phone		
Sample No.:	1#		
Hardware Version:	YK310-MB-V0.1		
Software Version:	BLU_G0851_V13.0.04.04_GENERIC_22-11-2023_2030_DE BUG		
Equipment Type:	Bluetooth LE		
Bluetooth Version:	5.0		
Modulation Type:	GFSK		
Data Rate:	1Mbps, 2Mbps		
<b>Operating Frequency Range:</b>	2402MHz-2480MHz		
Antenna Type:	PIFA Antenna		
Antenna Gain:	-1.45dBi		
	Battery		
	Brand Name:	BLU	
	Model No.:	C966548500P	
	Serial No.:	N/A	
Accessory Information:	Capacity:	5000mAh	
	Rated Voltage:	3.85V	
	Charge Limit:	4.4V	
	Manufacturer:	Shenzhen Jiuliyuan Electronic Technology Co., Ltd.	



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



	AC Adapter			
	Brand Name:	BLU		
	Model No.:	US-TY-2001		
Accessory Information:	Serial No.:	N/A		
Accessory mormation.	Rated Output:	5V=2000A		
	Rated Input:	100-240V~50/60Hz, 0.3A		
	Manufacturer:	SHENZHEN TIANYIN ELECTRONICS CO.,		
		LTD.		

Note 1: We use the dedicated software to control the EUT continuous transmission.

**Note 2:** For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

### 2.3. Channel List of EUT

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

Note 1: The black bold channels were selected for test.





### 2.4. Test Configuration of EUT


Test mode is used to control the EUT under the maximum power level during test.

### 2.5. Test Conditions


Temperature (°C)	15-35
Relative Humidity (%)	30-60
Atmospheric Pressure (kPa)	86-106

### 2.6. Test Setup Layout Diagram

### 2.6.1.Conducted Measurement



### 2.6.2.Conducted Emission Measurement

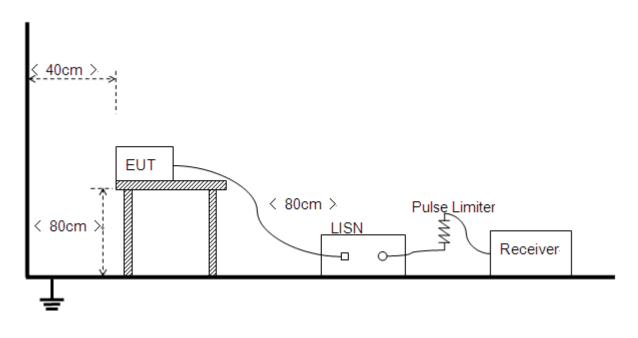



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China


 Tel: 86-755-36698555
 Fax: 86-755-36698525

 Http://www.morlab.cn
 E-mail: service@morlab.cn




### 2.6.3.Radiation Measurement

1) For radiated emissions from 9kHz to 30MHz

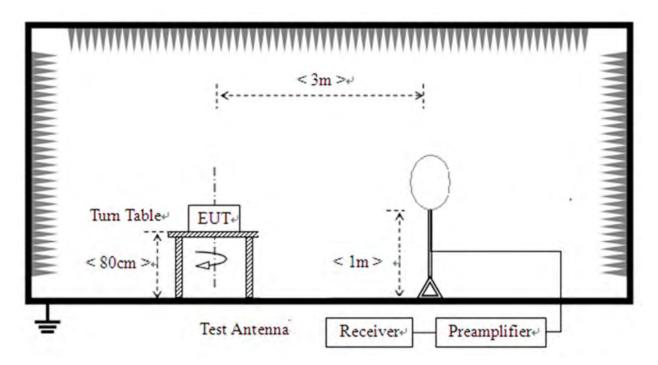

2) For radiated emissions from 30MHz to1GHz

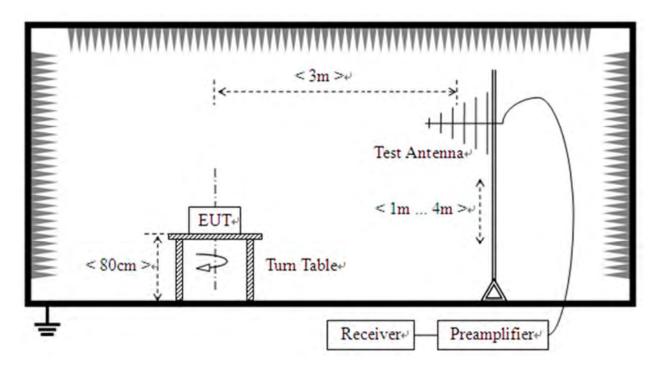




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

 Tel: 86-755-36698555
 Fax: 86-755-36698525

 Http://www.morlab.cn
 E-mail: service@morlab.cn



3) For radiated emissions above 1GHz

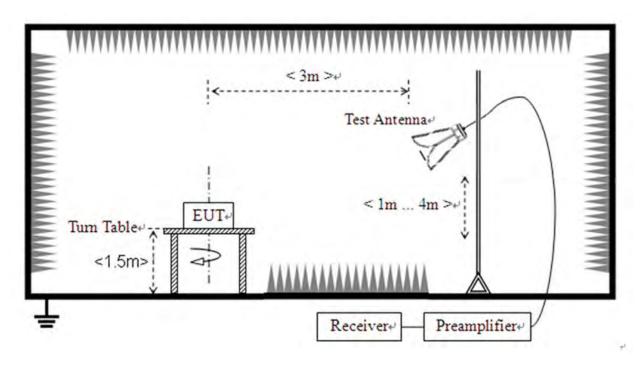



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



### 3.1. Antenna Requirement

### 3.1.1.Requirement

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

#### 3.1.2.Test Result

Inside of the EUT has a PIFA antenna coupled with the metal shrapnel. Please refer to the EUT photos.



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn E-mail: service@morlab.cn



### 3.2. Duty Cycle of Test Signal

### 3.2.1.Requirement

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%). When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be used to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration(T) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed T at any time that data are being acquired (i.e., no transmitter OFF-time is to be considered).

When continuous transmission cannot be achieved and sweep triggering/signal gating cannot be implemented, alternative procedures are provided that can be used to measure the average power; however, they will require an additional measurement of the transmitter duty cycle (D). Within this sub clause, the duty cycle refers to the fraction of time over which the transmitter is ON and is transmitting at its maximum power control level. The duty cycle is considered to be constant if variations are less than  $\pm 2\%$ ; otherwise, the duty cycle is considered to be non constant.

### 3.2.2.Test Result

Refer to Annex A.1 in this report.





### 3.3. Maximum Peak Conducted Output Power

### 3.3.1.Requirement

According to FCC section 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum peak conducted output power of the intentional radiator shall not exceed 1 Watt.

### 3.3.2.Test Procedures

KDB 558074 Section 8.3.1 was used in order to prove compliance.

#### 3.3.3.Test Setup Layout

Refer to chapter 2.6.1 in this report.

#### 3.3.4.Test Result

Refer to Annex A.2 in this report.



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525 E-mail: service@morlab.cn

Http://www.morlab.cn



### 3.4. Maximum Average Conducted Output Power

### 3.4.1.Requirement

According to FCC section 15.247(b)(3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum average conducted output power of the intentional radiator shall not exceed 1 Watt.

### 3.4.2.Test Procedures

KDB 558074 Section 8.3.2 was used in order to prove compliance.

#### 3.4.3.Test Setup Layout

Refer to chapter 2.6.1 in this report.

#### 3.4.4.Test Result


Refer to Annex A.3 in this report.



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 E-mail: service@morlab.cn

Fax: 86-755-36698525

Http://www.morlab.cn





### 3.5.1.Requirement

According to FCC section 15.247(a) (2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

#### 3.5.1.Test Procedures

The steps for the first option are as follows:

- a) Set analyzer center frequency to channel center frequency
- b) Set RBW to100kHz
- c) Set VBW to 300kHz
- d) Detector = peak.
- e) Trace mode = max hold
- f) Sweep time = auto couple
- g) Allow the trace to fully stabilize

h) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by6 dB relative to the maximum level measured in the fundamental emission

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described in 11.8.1 (i.e., RBW = 100 kHz, VBW  $\geq$  3  $\times$  RBW, and peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be  $\geq$ 6 dB.

#### 3.5.2.Test Setup Layout

Refer to chapter 2.6.1 in this report.

#### 3.5.3.Test Result


Refer to Annex A.4 in this report.



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

 Tel:
 86-755-36698555
 Fax:
 86-755-36698525

 Http://www.morlab.cn
 E-mail:
 service@morlab.cn





### 3.6. Conducted Spurious Emissions and Band Edge

#### 3.6.1.Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

#### 3.6.2.Test Procedures

KDB 558074 Section 8.5 and 8.7 was used in order to prove compliance.

#### 3.6.3.Test Setup Layout

Refer to chapter 2.6.1 in this report.

#### 3.6.4.Test Result

Refer to Annex A.5 and A.6 in this report.



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn E-mail: service@morlab.cn



### 3.7. Power Spectral Density

### 3.7.1.Requirement

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

### 3.7.2.Test Procedures

The measured power spectral density was calculated by the reading of the spectrum analyzer and calibration. Following is the test procedure for PSD test:

- a) Set analyzer center frequency to channel center frequency
- b) Set span to1.5 times DTS
- c) Set RBW to 3kHz
- d) Set VBW to 10kHz
- e) Detector = peak
- f) Sweep time = auto couple
- g) Trace mode = max hold
- h) Allow trace to fully stabilize

i) Use the peak marker function to determine the maximum amplitude level within the RBW

### 3.7.3.Test Setup Layout

Refer to chapter 2.6.1 in this report.

### 3.7.4.Test Result

Refer to Annex A.7 in this report.





### 3.8. Conducted Emission

### 3.8.1.Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a  $50\mu$ H/ $50\Omega$  line impedance stabilization network (LISN).

Fraguanay Danga (MHz)	Conducted Limit (dBµV)				
Frequency Range (MHz)	Quai-peak	Average			
0.15 - 0.50	66 to 56	56 to 46			
0.50 - 5	56	46			
5 - 30	60	50			

Note:

(a) The lower limit shall apply at the band edges.

(b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

#### 3.8.2.Test Procedures

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10: 2013.

### 3.8.3.Test Setup Layout

Refer to chapter 2.6.2 in this report.

### 3.8.4.Test Result

Refer to Annex A.8 in this report.





### **3.9. Restricted Frequency Bands**

### 3.9.1.Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

### 3.9.2.Test Procedures

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for  $f \ge 1$ GHz, 100 kHz for f < 1GHz

VBW = 3 MHz Sweep = auto Detector function = peak/average

Trace = max hold

Allow the trace to stabilize

### 3.9.3.Test Setup Layout

Refer to chapter 2.6.3 in this report.

### 3.9.4.Test Result

Refer to Annex A.8 in this report.





### 3.10. Radiated Emission

### 3.10.1.Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (µV/m)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

**Note1:** For above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit. **Note2:**For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK).In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table).





### 3.10.2.Test Procedures

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 30MHz, the emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9kHz-90 kHz, 110kHz-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

For measurements below 1GHz the resolution bandwidth is set to 100kHz for peak detection measurements or 120kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1GHz the resolution bandwidth is set to 1MHz, the video band width is set to 3MHz for peak measurements and as applicable for average measurements.

The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions. For measurements above 1 GHz, keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.

### 3.10.3.Test Setup Layout

Refer to chapter 2.6.3 in this report.

### 3.10.4.Test Result

Refer to Annex A.9 in this report.



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

 Tel: 86-755-36698555
 Fax: 86-755-36698525

 Http://www.morlab.cn
 E-mail: service@morlab.cn



# **Annex A Test Data and Result**

### A.1. Duty Cycle of Test Signal

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	BLE 1M	2402	Ant1	61.29	2.13	2.63
NVNT	BLE 1M	2440	Ant1	61.29	2.13	2.63
NVNT	BLE 1M	2480	Ant1	61.29	2.13	2.63
NVNT	BLE 2M	2402	Ant1	32.26	4.91	5
NVNT	BLE 2M	2440	Ant1	31.75	4.98	5
NVNT	BLE 2M	2480	Ant1	32.26	4.91	5



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China


Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn

E-mail: service@morlab.cn



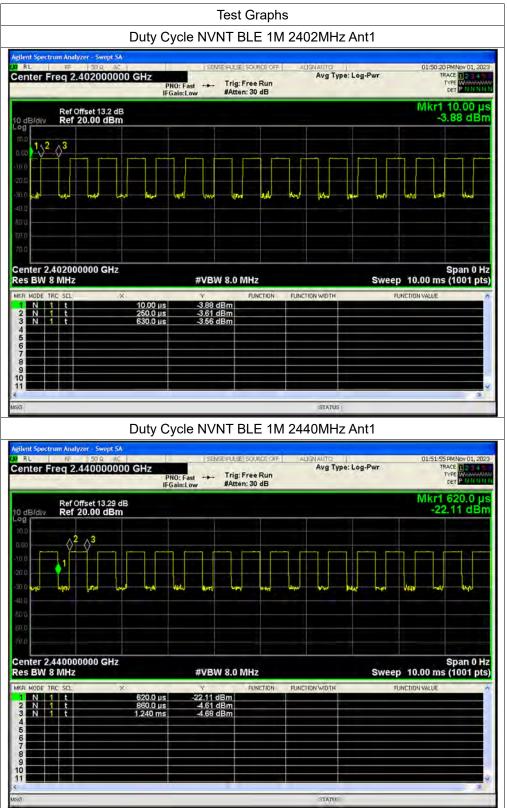


**MORLAB** 

Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn E-mail: service@morlab.cn



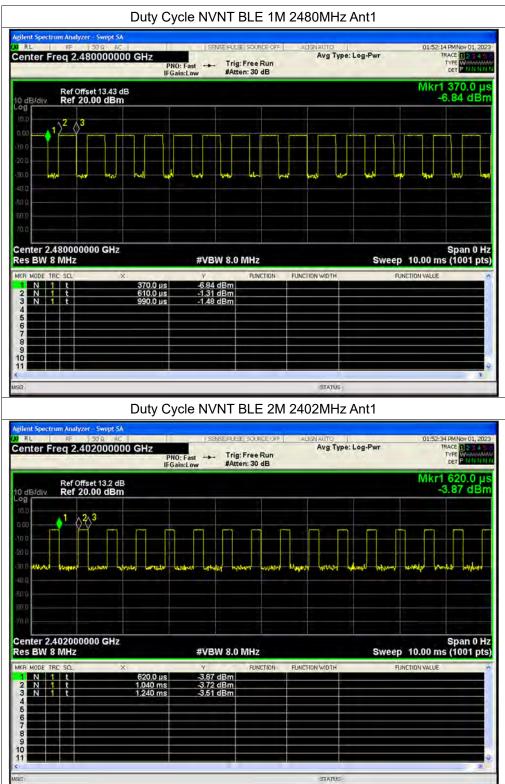




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Fax: 86-755-36698525 Tel: 86-755-36698555 Http://www.morlab.cn E-mail: service@morlab.cn



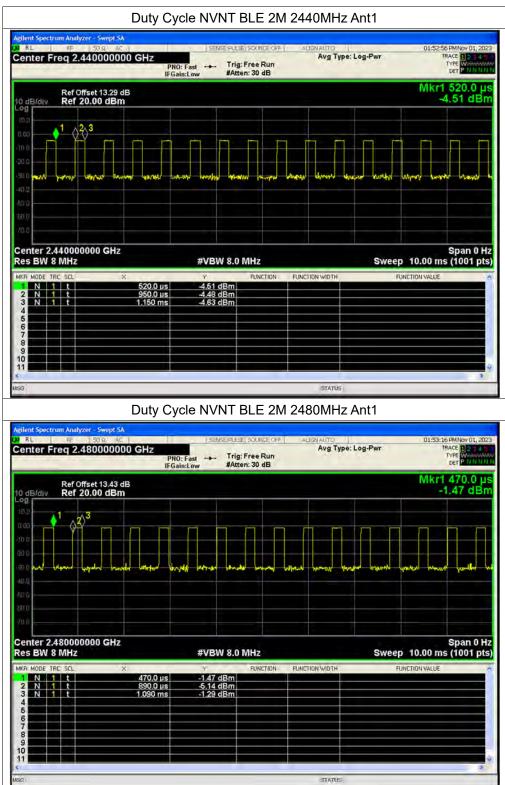

**MORLAB** 

Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn E-mail: service@morlab.cn



### A.2. Maximum Peak Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Total Conducted Power (W)	Limit Conducted (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	-3.58	0	-3.58	0.00044	30	Pass
NVNT	BLE 1M	2440	Ant1	-4.65	0	-4.65	0.00034	30	Pass
NVNT	BLE 1M	2480	Ant1	-1.42	0	-1.42	0.00072	30	Pass
NVNT	BLE 2M	2402	Ant1	-3.52	0	-3.52	0.00044	30	Pass
NVNT	BLE 2M	2440	Ant1	-4.64	0	-4.64	0.00034	30	Pass
NVNT	BLE 2M	2480	Ant1	-1.46	0	-1.46	0.00071	30	Pass



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China


Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn

E-mail: service@morlab.cn



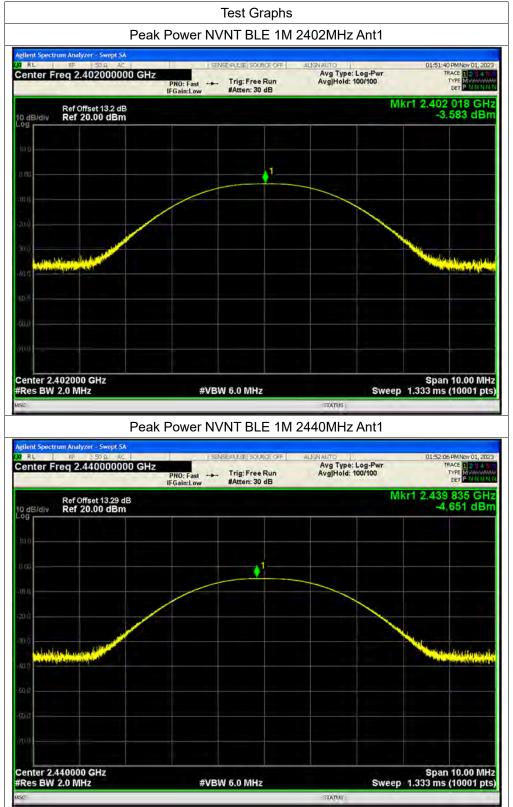




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn E-mail: service@morlab.cn



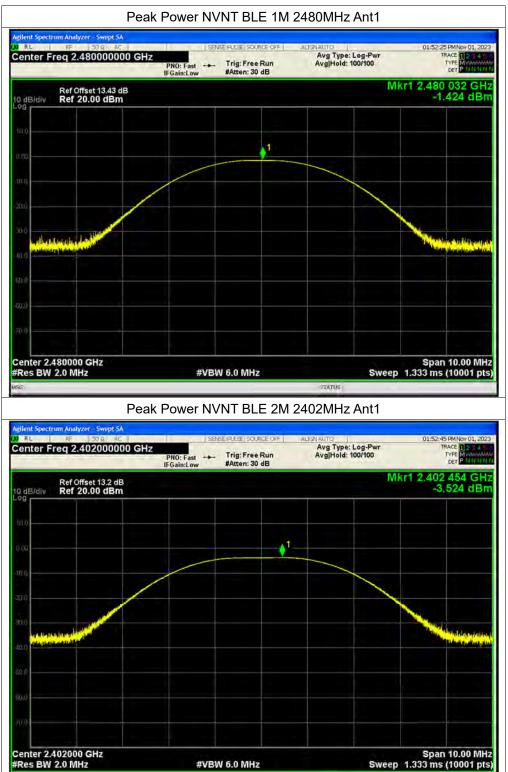


**MORLAB** 

Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn E-mail: service@morlab.cn

STATUS



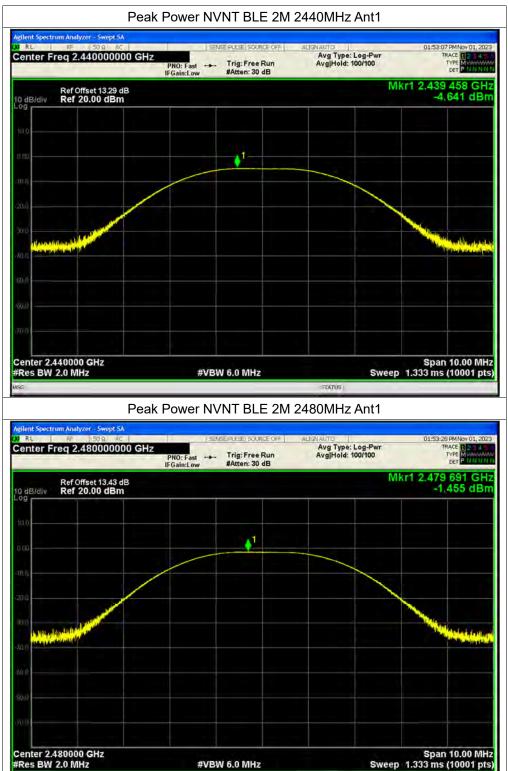




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn E-mail: service@morlab.cn

STATUS





### A.3. Maximum Average Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Total Conducted Power (W)	Limit Conducted (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	-6.29	2.13	-4.16	0.00038	30	Pass
NVNT	BLE 1M	2440	Ant1	-7.18	2.13	-5.05	0.00031	30	Pass
NVNT	BLE 1M	2480	Ant1	-4.04	2.13	-1.91	0.00064	30	Pass
NVNT	BLE 2M	2402	Ant1	-9.01	4.91	-4.1	0.00039	30	Pass
NVNT	BLE 2M	2440	Ant1	-10.06	4.98	-5.08	0.00031	30	Pass
NVNT	BLE 2M	2480	Ant1	-6.77	4.91	-1.86	0.00065	30	Pass



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn

E-mail: service@morlab.cn







Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

 Tel: 86-755-36698555
 Fax: 86-755-36698525

 Http://www.morlab.cn
 E-mail: service@morlab.cn





**MORLAB** 

Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China





**MORLAB** 

Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



### A.4. 6 dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 1M	2402	Ant1	0.679	0.5	Pass
NVNT	BLE 1M	2440	Ant1	0.672	0.5	Pass
NVNT	BLE 1M	2480	Ant1	0.662	0.5	Pass
NVNT	BLE 2M	2402	Ant1	1.155	0.5	Pass
NVNT	BLE 2M	2440	Ant1	1.165	0.5	Pass
NVNT	BLE 2M	2480	Ant1	1.317	0.5	Pass



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn







Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Http://www.morlab.cn E-mail: service@morlab.cn

Fax: 86-755-36698525







Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn E-mail: service@morlab.cn





**MORLAB** 

Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn E-mail: service@morlab.cn



## A.5. Conducted Spurious Emissions

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-23.48	-20	Pass
NVNT	BLE 1M	2440	Ant1	-21.69	-20	Pass
NVNT	BLE 1M	2480	Ant1	-26.45	-20	Pass
NVNT	BLE 2M	2402	Ant1	-22.56	-20	Pass
NVNT	BLE 2M	2440	Ant1	-22.15	-20	Pass
NVNT	BLE 2M	2480	Ant1	-25.76	-20	Pass




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525


Http://www.morlab.cn



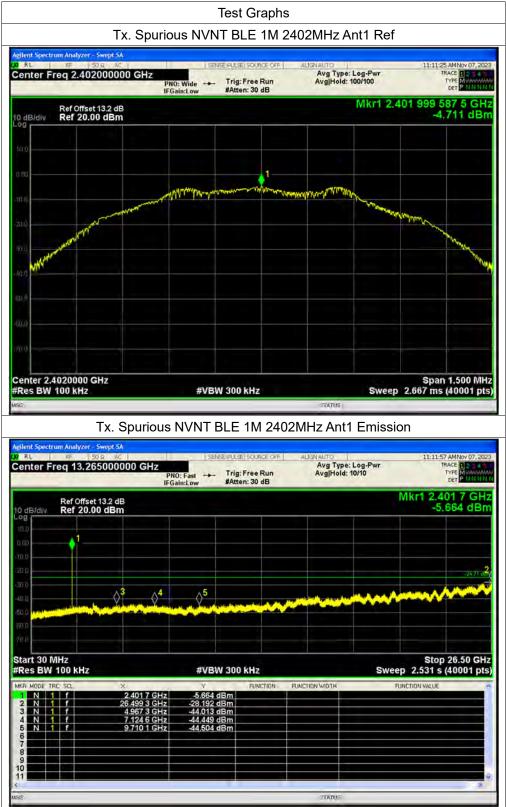





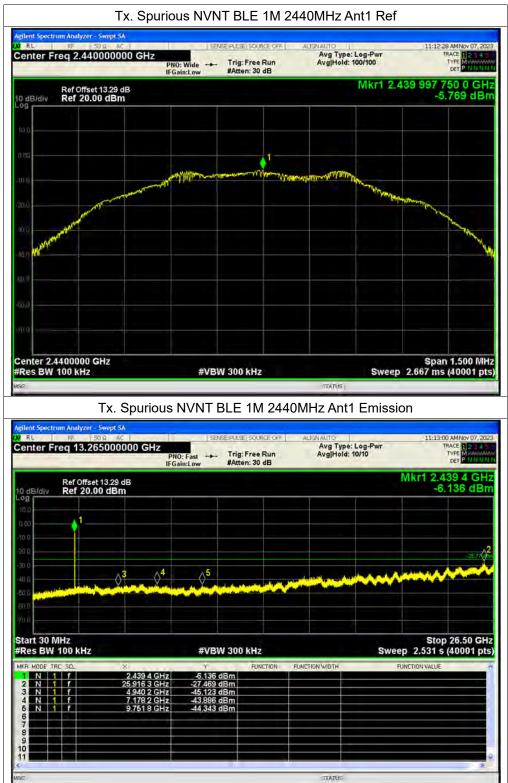




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China


Fax: 86-755-36698525 Tel: 86-755-36698555 Http://www.morlab.cn E-mail: service@morlab.cn



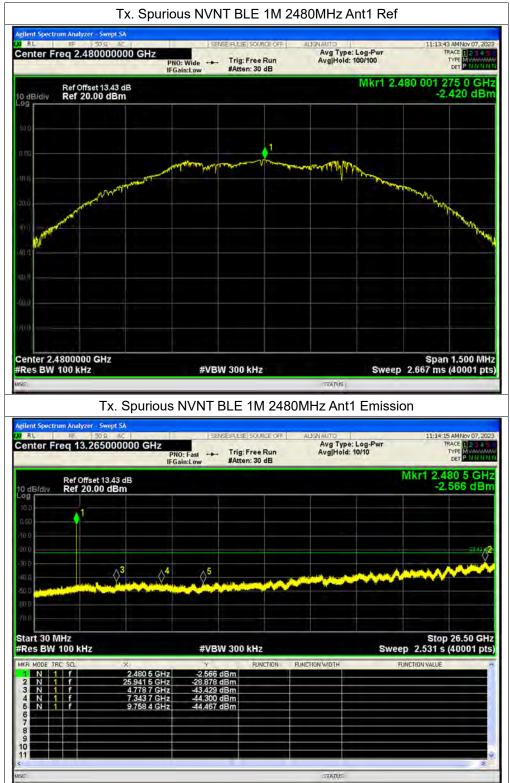







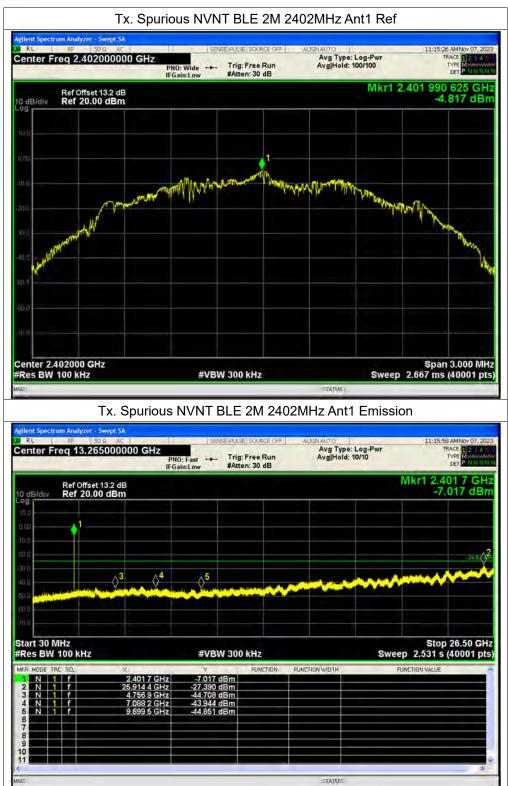


**MORLAB** 



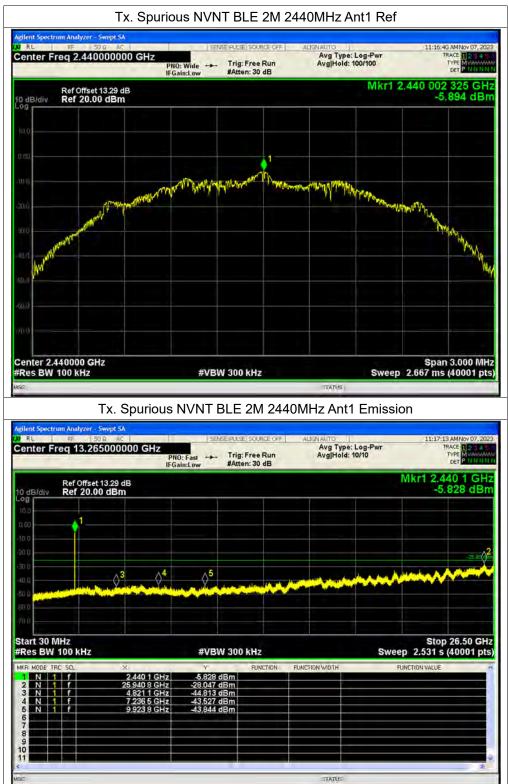





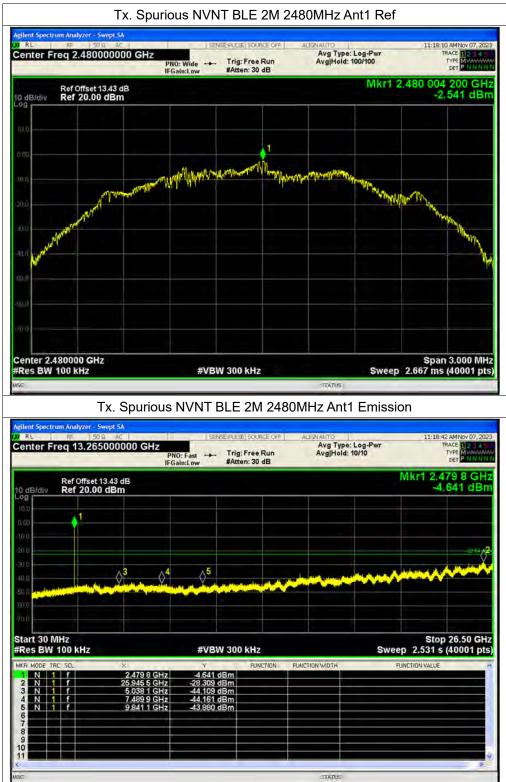



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Fax: 86-755-36698525 Tel: 86-755-36698555 Http://www.morlab.cn E-mail: service@morlab.cn



## A.6. Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-40.76	-20	Pass
NVNT	BLE 1M	2480	Ant1	-43.04	-20	Pass
NVNT	BLE 2M	2402	Ant1	-33	-20	Pass
NVNT	BLE 2M	2480	Ant1	-39.95	-20	Pass




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525


Http://www.morlab.cn



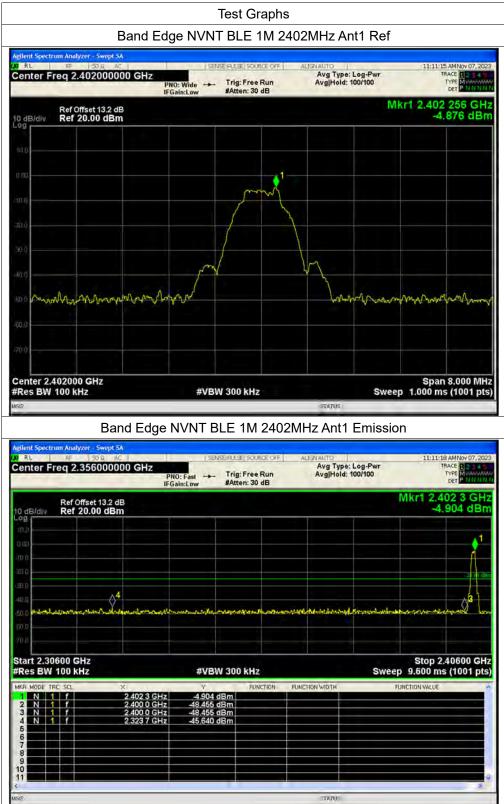





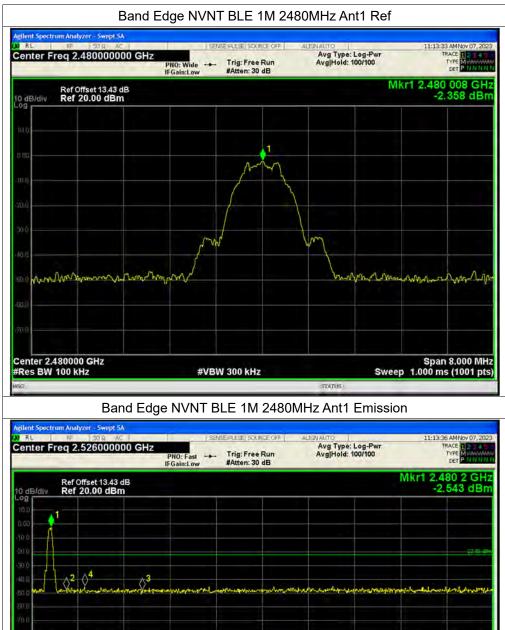

Start 2.47600 GHz #Res BW 100 kHz Stop 2.57600 GHz Sweep 9.600 ms (1001 pts) #VBW 300 kHz FUNCTION N 1 f N 1 f N 1 f N 1 f sm dBm 45 45,406 dBm 67 8 9 10 STATUS







Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

#VBW 300 kHz

dBm

8.231 dBm

FUNCTION

STATUS

TION

Stop 2.40600 GHz Sweep 9.600 ms (1001 pts)



Start 2.30600 GHz #Res BW 100 kHz

> N 1 f N 1 f N 1 f N 1 f

4 5

6789011





02  $\sqrt[4]{0^3}$ Start 2.47600 GHz #Res BW 100 kHz Stop 2.57600 GHz Sweep 9.600 ms (1001 pts) #VBW 300 kHz FUNCTION N 1 f N 1 f ZZZ 1 f 1 f dBm 45 2,497 44.432 dBm 67 8 9 10 TATUS





## A.7. Power Spectral Density

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/3kHz)	Duty Factor (dB)	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	BLE 1M	2402	Ant1	-18.43	0	-18.43	8	Pass
NVNT	BLE 1M	2440	Ant1	-19.95	0	-19.95	8	Pass
NVNT	BLE 1M	2480	Ant1	-16.58	0	-16.58	8	Pass
NVNT	BLE 2M	2402	Ant1	-21.46	0	-21.46	8	Pass
NVNT	BLE 2M	2440	Ant1	-22.52	0	-22.52	8	Pass
NVNT	BLE 2M	2480	Ant1	-19.16	0	-19.16	8	Pass




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525


Http://www.morlab.cn



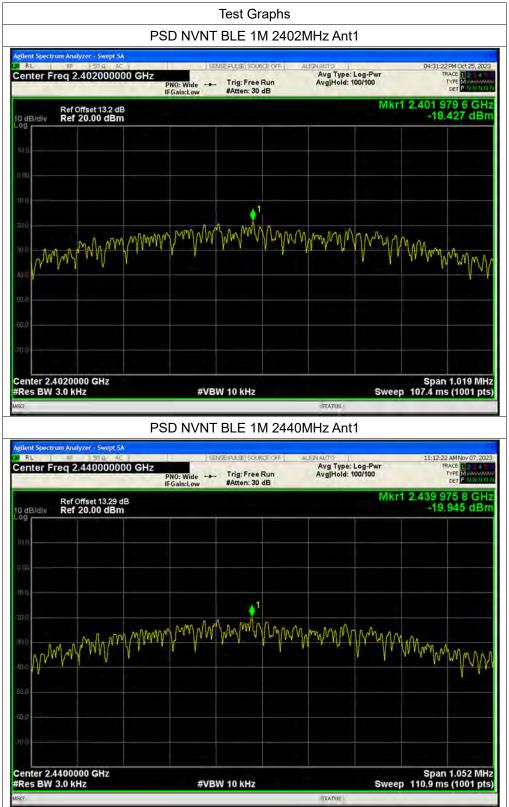





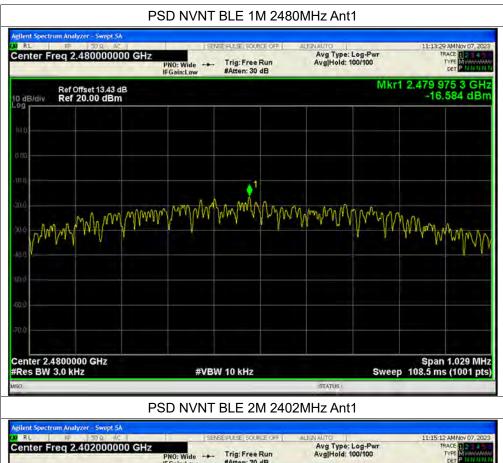






Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn E-mail: service@morlab.cn



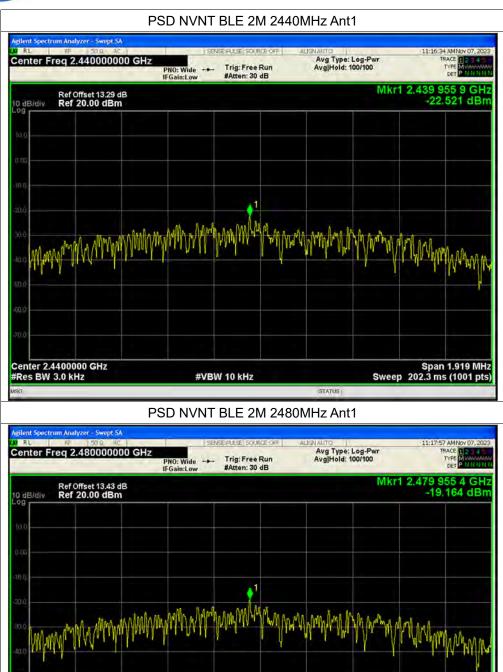

**MORLAB** 

Center 2.4800000 GHz #Res BW 3.0 kHz

Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

#VBW 10 kHz

Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn E-mail: service@morlab.cn

STATUS

Span 1.938 MHz Sweep 204.4 ms (1001 pts)



## A.8. Conducted Emission

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Set RBW=9kHz, VBW=30kHz. Refer to recorded points and plots below.

**Note:** Both of the test voltage AC 120V/60Hz and AC 230V/50Hz were considered and tested respectively, only the results of the worst case AC 120V/60Hz were recorded in this report.

### A. Test Setup:


Test Mode: <u>EUT + Adapter + USB cable + Earphone + BT TX</u> Test voltage: <u>AC 120V/60Hz</u> The measurement results are obtained as below: E [dB $\mu$ V] =U<sub>R</sub> + L<sub>Cable loss</sub> [dB] + A<sub>Factor</sub> U<sub>R</sub>: Receiver Reading A<sub>Factor</sub>: Voltage division factor of LISN



Fax: 86-755-36698525 E-mail: service@morlab.cn



### **B. Test Plot:**

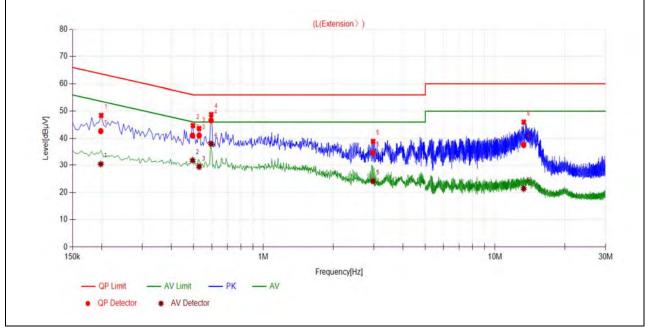


(L Phase)

No.	Fre.	Emission L	.evel (dBµV)	Pow		Power-line	Verdict
	(MHz)	Quai-peak	Average	Quai-peak	beak Average		voruiot
1	0.1986	42.67	30.44	63.67	53.67		PASS
2	0.4945	41.02	31.83	56.09	46.09		PASS
3	0.5278	41.04	29.42	56.00	46.00	Line	PASS
4	0.5944	46.66	38.02	56.00	46.00	Line	PASS
5	2.9728	34.60	24.10	56.00	46.00		PASS
6	13.2915	37.55	21.37	60.00	50.00		PASS







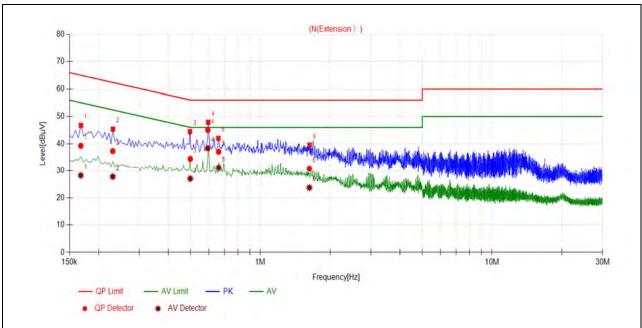

## (N Phase)

No.	Fre.	Emission L	.evel (dBµV)	Power-li		Power-line	Verdict
	(MHz)	Quai-peak	Average	Quai-peak	Average		
1	0.1677	39.27	28.22	65.08	55.08		PASS
2	0.2305	37.32	27.78	62.43	52.43		PASS
3	0.4981	34.44	27.03	56.03	46.03	Noutral	PASS
4	0.5932	45.06	38.40	56.00	46.00	Neutral	PASS
5	0.6598	37.06	31.15	56.00	46.00		PASS
6	1.6266	30.81	23.72	56.00	46.00		PASS



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



## A.9. Restricted Frequency Bands

The lowest and highest channels are tested to verify the Restricted Frequency Bands.

The measurement results are obtained as below:

 $E [dB\mu V/m] = U_R + A_T + A_{Factor} [dB]; A_T = L_{Cable loss} [dB] - G_{preamp} [dB]$ 

A<sub>T</sub>: Total correction Factor except Antenna

U<sub>R</sub>: Receiver Reading

G<sub>preamp</sub>: Preamplifier Gain

A<sub>Factor</sub>: Antenna Factor at 3m

Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.

Channel	Frequency	Detector	Receiver Reading	A <sub>T</sub>	A <sub>Factor</sub>	Max. Emission	Limit	Verdict
	(MHz)	PK/ AV	U <sub>R</sub> (dBµV)	(dB)	(dB@3m)	E (dBµV/m)	(dBµV/m)	Verdiot
0	2374.05	PK	22.98	6.74	27.20	56.92	74	PASS
0	2390.00	AV	10.36	6.74	27.20	44.30	54	PASS
39	2486.14	PK	22.26	6.74	27.20	56.20	74	PASS
39	2485.92	AV	12.10	6.74	27.20	46.04	54	PASS

#### 1Mbps



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525


Http://www.morlab.cn





	1Oct 28, 2023	04:10:52 0	ALIGN OFF	1	SENSE:IN		ser - Swept SA	F PRESEL		Ceysig R L
Marker Select Marker	E 1 2 3 4 5 6 E M W W W W W	TRAC	Type: Voltage Hold:>100/100	Avg	Trig: Free Run #Atten: 6 dB	GHz PNO: Fast	48000000		r 1 2	
1	48 GHz 7 dBµV	2.374 0 22.97	Mkr1				.99 dBµV	Ref 82	lív	dB/d
Norm										0 0
Del			2 <sup>1</sup>	angen angenaan die		week and the second second			مجرميرون	
Fixed										0 9 
c		000 ms (	Sweep 1		3.0 MHz	#VBW	1 MHz	00 GHz ISPR) 1	W (C	s B
Properties	IN VALUE	FUNCTI	FUNCTION WIDTH	FUNCTION	¥ 22.977 dBµV 21.718 dBµV	048 GHz 000 GHz		SCL f		N
<b>M</b> o 1 o										
	7			_						

(PEAK, Channel 0)

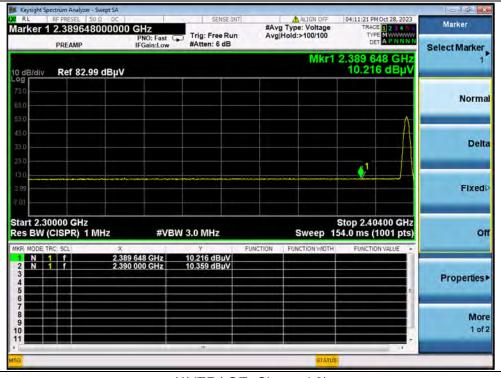

# (AVERAGE, Channel 0)




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Fax: 86-755-36698525



0.6	04:25:56 PM Oct 28, 2023	ALIGN OFF	T	SENSE:IN	1		Analyzer - Swe SEL 50 Ω		1
Marker	TRACE 1 2 3 4 5 6 TYPE MWWWWW	Type: Voltage Hold:>100/100		Trig: Free Run		00000 G			ker
Select Marke	DET PNNNNN	Hold:>100/100	n	#Atten: 6 dB	NO: Fast Gain:Low	P	MP	PRE	
	2.486 140 GHz 22.260 dBµV	Mkr2				IBμV	f 82.99 d	Re	B/div
Norn								_	
De			الله و المحد و	malakanatakanatak	2	1	Ì	/	1
Fixe									
	Stop 2.50000 GHz 000 ms (1001 pts)	Sweep 1.	Filler	3.0 MHz	#VBW		R) 1 MH	7800 (CISP	BW
	FUNCTION VALUE	FUNCTION WIDTH	FUNCTI	19.737 dBµV 22.260 dBµV	0 GHz	× 2.483 50 2.486 14		1 f	N
Propertie	E								
Ma 1 c									
	-								
		STATUS							-

## (PEAK, Channel 39)

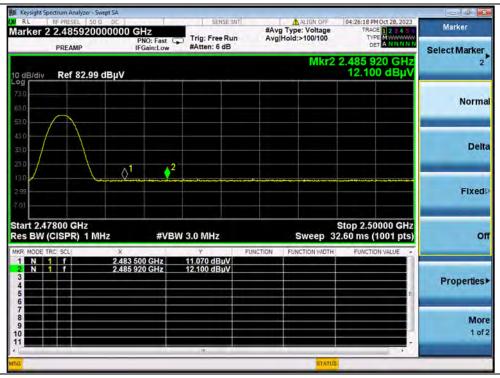


## (AVERAGE, Channel 39)





#### 2Mbps

Channel	Frequency	Detector	Receiver Reading	A <sub>T</sub>	A <sub>Factor</sub>	Max. Emission	Limit	Verdict
Channel	(MHz)	PK/ AV	U <sub>R</sub> (dBµV)	(dB)	(dB@3m)	E (dBµV/m)	(dBµV/m)	veruici
0	2370.51	PK	22.63	6.74	27.20	56.57	74	PASS
0	2389.23	AV	11.52	6.74	27.20	45.46	54	PASS
39	2489.68	РК	23.01	6.74	27.20	56.95	74	PASS
39	2484.36	AV	12.43	6.74	27.20	46.37	54	PASS

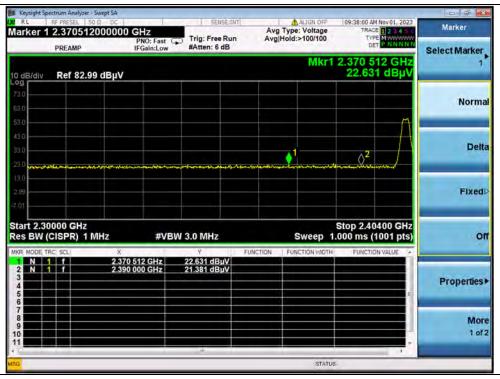

(PEAK, Channel 0)



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn E-mail: service@morlab.cn

Fax: 86-755-36698525



Marker	1 2 3 4 5 6 MW////////	09:38:29 AM N TRACE	ALIGN OFF	#Av	SENSE:IN		32000000 0	C.38923	
Select Marker	ANNNN	DET	Hold:>100/100	Avg	Trig: Free Run #Atten: 6 dB	PNO: Fast C		PREAMP	-
1		2.389 23 11.522	Mkr1				.99 dBµV	Ref 82.	div
Norma									
-	$\land$								
Delta		<b>↓</b> 1:							
Fixed									
to		Stop 2.404 54.0 ms (10			3.0 MHz	#VBW		000 GHz ISPR) 1	
	VALUE ·	FUNCTION	FUNCTION WIDTH	FUNCTION	¥ 11.522 dBuV	232 GHz	× 2 389 2	SCL	
Properties					11.065 dBµV			Î	N 1
Mon 1 of:		_							

(AVERAGE, Channel 0)



(PEAK, Channel 39)

MORLAB

MORLAE

Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 F Http://www.morlab.cn E

Fax: 86-755-36698525 E-mail: service@morlab.cn

Page 64 of 72



Marker Select Marke	09:20:35 AM Nov 01, 2023 TRACE 2 2 3 4 5 1 TYPE M	ALIGN OFF Type: Voltage Hold:>100/100	#A	SENSE:IN Trig: Free Run #Atten: 6 dB	GHz PNO: Fast IFGain:Low	000000			ker 2
	2.484 358 GHz 12.429 dBµV	Mkr2				dBµV	82.99	Re	3/dív
Norm									
De					-2		J		/
Fixe				anaharan din tan dina		10			
	Stop 2.50000 GHz 2.60 ms (1001 pts)	Sweep 32		3.0 MHz	#VBW		GHz R) 1 MI	-	BW
Propertie	FUNCTION VALUE	FUNCTION WIDTH	FUNCTION	12.004 dBµV 12.429 dBµV	500 GHz 358 GHz			RC SCL	N
Ma 1 a									
		STATUS		III.				_	_

(AVERAGE, Channel 39)



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax:

Fax: 86-755-36698525

Http://www.morlab.cn



## A.10. Radiated Emission

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak (or average) limit, it is unnecessary to perform an quasi-peak measurement (or average).

The measurement results are obtained as below:

 $E [dB\mu V/m] = U_R + A_T + A_{Factor} [dB]; A_T = L_{Cable loss} [dB] - G_{preamp} [dB]$ 

A<sub>T</sub>: Total correction Factor except Antenna

U<sub>R</sub>: Receiver Reading

G<sub>preamp</sub>: Preamplifier Gain

A<sub>Factor</sub>: Antenna Factor at 3m

During the test, the total correction Factor  $A_T$  and  $A_{Factor}$  were built in test software.

Note1: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.


Note2: For the frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.


**Note3:** For the frequency, which started from 18GHz to 10th harmonic of the highest frequency, was pre-scanned and the result which was 20dB lower than the limit was not recorded.






## 1Mbps



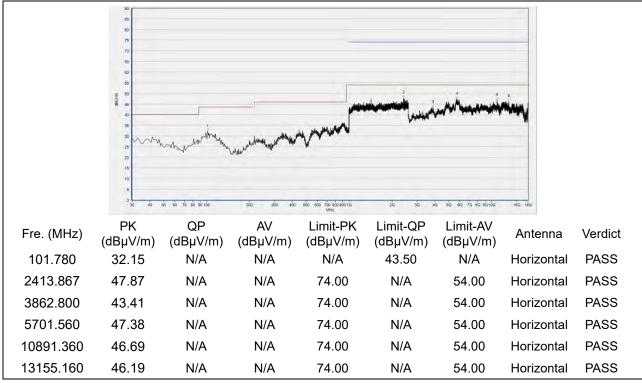

(Antenna Horizontal, 30MHz to 18GHz)

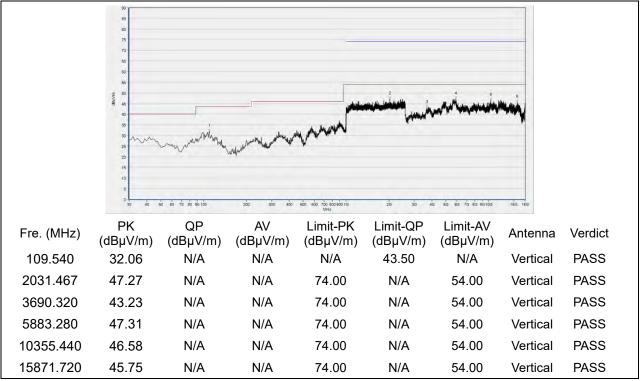


(Antenna Vertical, 30MHz to 18GHz)



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555


Fax: 86-755-36698525 E-mail: service@morlab.cn

Http://www.morlab.cn






#### Plot for Channel 19

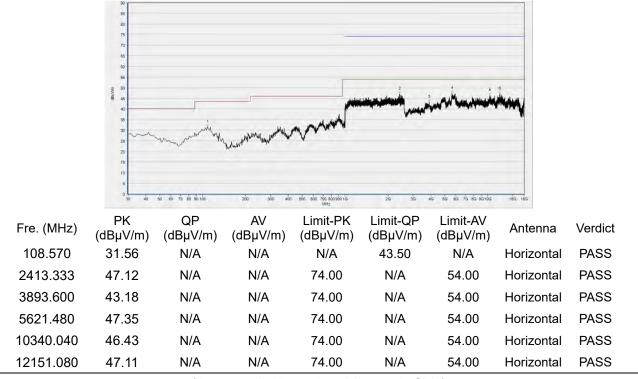

(Antenna Horizontal, 30MHz to 18GHz)

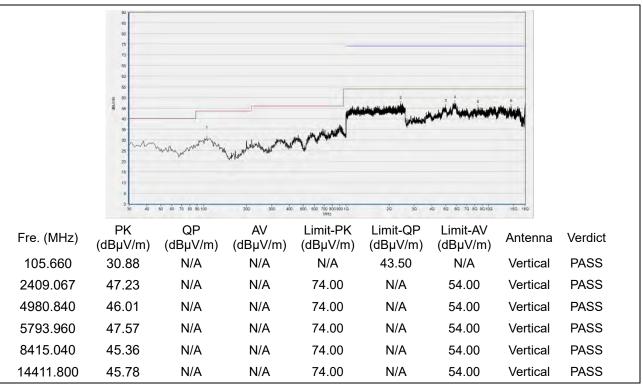

(Antenna Vertical, 30MHz to 18GHz)




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525


Http://www.morlab.cn



### Plot for Channel 39

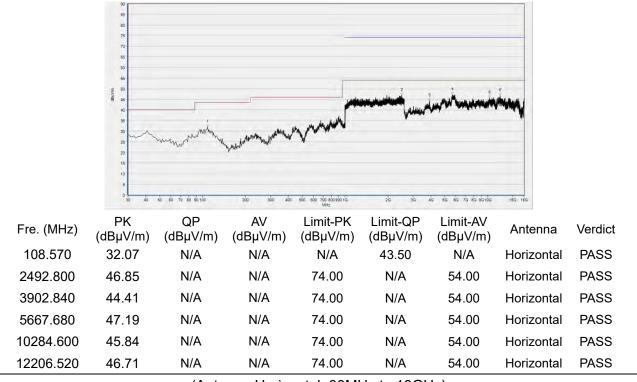

(Antenna Horizontal, 30MHz to 18GHz)

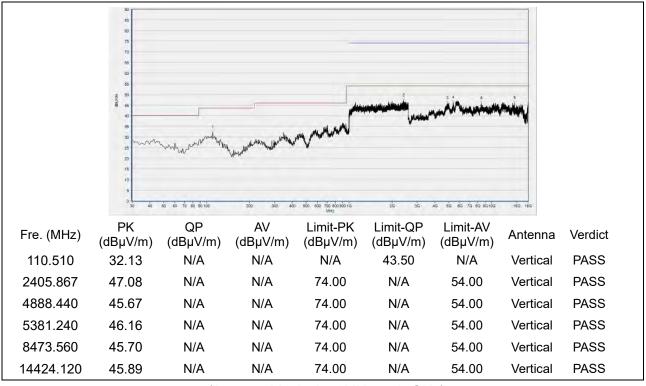

(Antenna Vertical, 30MHz to 18GHz)




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555


Fax: 86-755-36698525

Http://www.morlab.cn




## 2Mbps



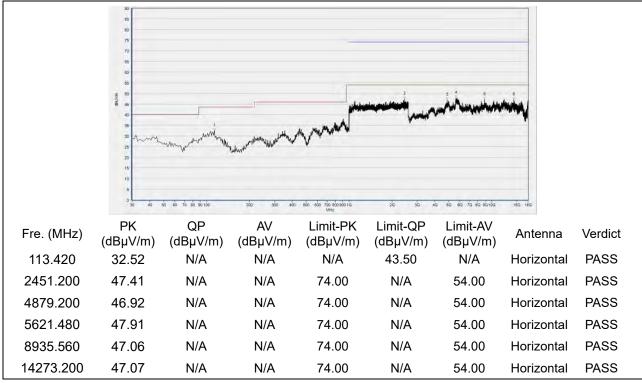

(Antenna Horizontal, 30MHz to 18GHz)

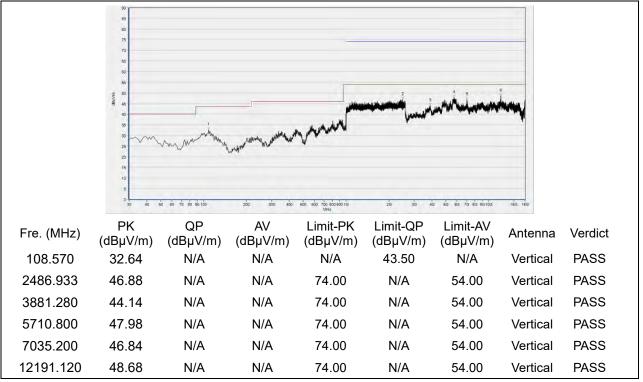

(Antenna Vertical, 30MHz to 18GHz)



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China


Tel: 86-755-36698555

Fax: 86-755-36698525


Http://www.morlab.cn



#### Plot for Channel 19

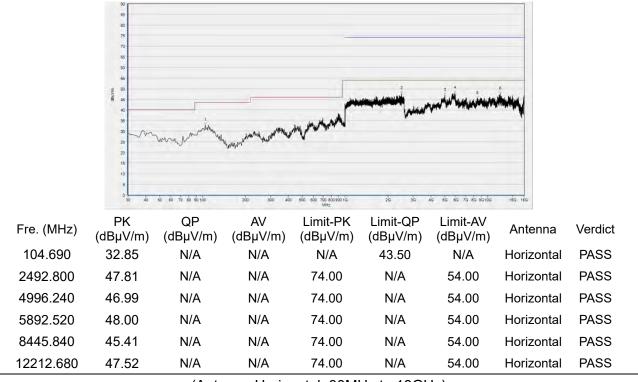

(Antenna Horizontal, 30MHz to 18GHz)

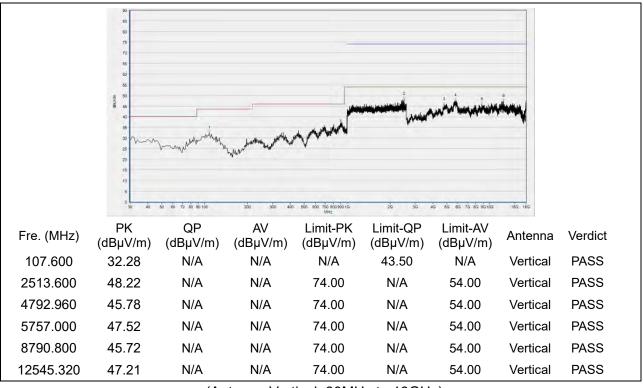

(Antenna Vertical, 30MHz to 18GHz)



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn






#### Plot for Channel 39

	80 80 90 75 70 80 80 80 80 80 80 80 80 80 80 80 80 80	m na a to to to to	the so is		n de de	n eo to so sono - 100	110	
Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
102.750	33.41	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2493.333	47.50	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3847.400	44.10	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5599.920	47.69	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8935.560	47.00	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12144.920	46.91	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

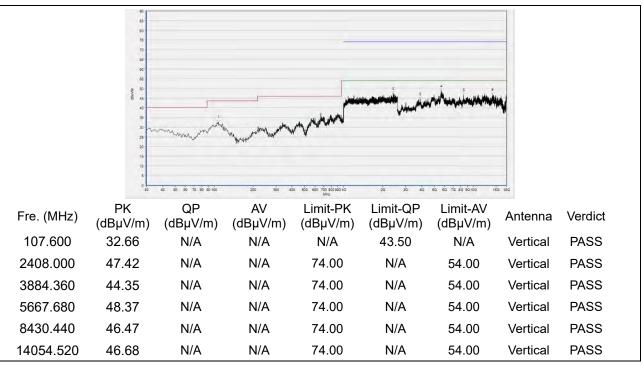

(Antenna Vertical, 30MHz to 18GHz)

END OF REPORT



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Http://www.morlab.cn Fax: 86-755-36698525