

TEST REPORT

Reference No..... : WTX23X05095991W
FCC ID : YHLBLUN3U
Applicant : BLU Products, Inc.
Address : 8600 NW 36th Street, Suite #200,Doral, FL 33166,USA
Manufacturer : BLU Products, Inc.
Address : 8600 NW 36th Street, Suite #200,Doral, FL 33166,USA
Product Name : Smart Phone
Model No..... : N3
FCC Part 2.1093
Standards : IEEE Std C95.1: 2019
IEEE Std C95.3: 2002 + Rev. 2008
IEC/IEEE 62209-1528 Ed. 1.0 (2020-10)
Date of Receipt sample : 2023-05-08
Date of Test..... : 2023-05-08 to 2023-06-15
Date of Issue : 2023-06-16
Test Report Form No. : WTX_IEEE_1528W
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.

Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China
Tel.: +86-755-33663308 Fax.: +86-755-33663309 Email: sem@waltek.com.cn

Tested by:

Jack Sun

Jack Sun

Approved by:

Silin Chen

Silin Chen

TABLE OF CONTENTS

1. General Information4
 1.1 Product Description for Equipment Under Test (EUT)4
 1.2 Test Standards11
 1.3 Test Methodology11
 1.4 Test Facility11

2. Summary of Test Results12

3. Specific Absorption Rate (SAR).....13
 3.1 Introduction.....13
 3.2 SAR Definition13

4. SAR Measurement System14
 4.1 The Measurement System14
 4.2 Probe14
 4.3 Probe Calibration Process16
 4.4 Phantom17
 4.5 Device Holder17
 4.6 Test Equipment List18

5. Tissue Simulating Liquids19
 5.1 Composition of Tissue Simulating Liquid19
 5.2 Tissue Dielectric Parameters for Head and Body Phantoms20
 5.3 Tissue Calibration Result21

6. SAR Measurement Evaluation22
 6.1 Purpose of System Performance Check22
 6.2 System Setup22
 6.3 Validation Results23

7. EUT Testing Position25
 7.1 Define Two Imaginary Lines on The Handset25
 7.2 Cheek Position26
 7.3 Tilted Position26
 7.4 Body Position27
 7.5 EUT Antenna Position27
 7.6 EUT Testing Position28

8. SAR Measurement Procedures30
 8.1 Measurement Procedures30
 8.2 Spatial Peak SAR Evaluation30
 8.3 Area & Zoom Scan Procedures31
 8.4 Volume Scan Procedures31
 8.5 SAR Averaged Methods31
 8.6 Power Drift Monitoring31

9. SAR Test Result32
 9.1 Conducted RF Output Power32
 9.2 Test Results for Standalone SAR Test297
 9.3 Simultaneous Multi-band Transmission SAR Analysis335

10. Measurement Uncertainty340
 10.1 Uncertainty for SAR Test340

Annex A. Plots of System Performance Check342
Annex B. Plots of SAR Measurement342
Annex C. EUT Photos342
Annex D. Test Setup Photos342
Annex E. Calibration Certificate342

Report version

Version No.	Date of issue	Description
Rev.00	2023-06-16	Original
/	/	/

1. General Information

1.1 Product Description for Equipment Under Test (EUT)

General Description of EUT:	
Product Name:	Smart Phone
Brand Name:	BLU
Model No.:	N3
Adding Model(s):	/
Rated Voltage:	DC3.87V
Battery Capacity:	4700mAh(C8462544700P)
Adapter Model	US-KB-PD66W01 Input:AC100-240v~50/60Hz 1.5A Output:DC5V3A;DC9V3A;DC12V3A;DC15V3A;DC20V3.25A;DC11V6A
Software Version:	BOLD_N0070_V13.0.04.00_GENERIC 17-06-2023 20:22
Hardware Version:	KX9NF_04
<i>Note: The test data is gathered from a production sample provided by the manufacturer.</i>	

Technical Characteristics of EUT:	
2G	
Support Networks:	GSM, GPRS, EDGE
Support Band:	GSM850/PCS1900
Uplink Frequency:	GSM/GPRS/EDGE 850: 824~849MHz GSM/GPRS/EDGE 1900: 1850~1910MHz
Downlink Frequency:	GSM/GPRS/EDGE 850: 869~894MHz GSM/GPRS/EDGE 1900: 1930~1990MHz
RF Output Power:	Normal: GSM850: 32.68dBm, GSM1900: 29.86dBm, EDGE850: 26.83dBm, EDGE1900: 25.81dBm Sar sensor: GSM1900: 22.82dBm, EDGE1900: 18.83dBm Receiver ON: GSM1900: 21.73dBm, EDGE1900: 18.0dBm Hotspot ON: GSM850: 30.76dBm, GSM1900: 22.95dBm, EDGE850: 24.99dBm, EDGE1900: 18.97dBm
Type of Modulation:	GMSK, 8PSK
Type of Antenna:	Integral Antenna
Antenna Gain:	GSM850: -3.5dBi; GSM1900:-2dBi
GPRS/EDGE Class:	Class 12
3G	
Support Networks:	WCDMA, HSDPA, HSUPA
Support Band:	WCDMA Band 2, WCDMA Band 4, WCDMA Band 5
Uplink Frequency:	WCDMA Band 2: 1850~1910MHz WCDMA Band 4: 1710-1755MHz WCDMA Band 5: 824~849MHz
Downlink Frequency:	WCDMA Band 2: 1930~1990MHz WCDMA Band 4: 2110-2155MHz WCDMA Band 5: 869~894MHz
RF Output Power:	Normal: WCDMA Band 2: 22.12dBm, WCDMA Band 4: 22.74dBm, WCDMA Band 5: 22.83dBm Sar sensor: WCDMA Band 2: 19.11dBm, WCDMA Band 4: 19.65dBm, Receiver ON: WCDMA Band 2: 13.11dBm, WCDMA Band 4: 14.73dBm, Hotspot ON:

	WCDMA Band 2: 18.12dBm, WCDMA Band 4: 18.69dBm, WCDMA Band 5: 20.79dBm
Type of Modulation:	BPSK
Antenna Type:	Integral Antenna
Antenna Gain:	WCDMA Band 2: -2dBi, WCDMA Band 4: -2dBi, WCDMA Band 5: -3.5dBi
4G	
Support Networks:	FDD-LTE, TDD-LTE
Support Band:	FDD-LTE Band 2, 4, 5, 12, 13, 17, 25, 26, 66, 71 TDD-LTE Band 41
Uplink Frequency:	FDD-LTE Band 2: Tx: 1850-1910MHz, FDD-LTE Band 4: Tx: 1710-1755MHz, FDD-LTE Band 5: Tx: 824-849MHz, FDD-LTE Band 12: Tx: 699-716MHz, FDD-LTE Band 13: Tx: 777-787MHz, FDD-LTE Band 17: Tx: 704-716MHz, FDD-LTE Band 25: Tx: 1850-1915MHz, FDD-LTE Band 26: Tx: 814-824MHz, FDD-LTE Band 26: Tx: 824-849MHz, TDD-LTE Band 41: Tx: 2496-2690MHz FDD-LTE Band 66: Tx: 1710-1780MHz, FDD-LTE Band 71: Tx: 663-698MHz,
Downlink Frequency:	FDD-LTE Band 2: Rx: 1930-1990MHz, FDD-LTE Band 4: Rx: 2110-2155MHz, FDD-LTE Band 5: Rx: 869-894MHz, FDD-LTE Band 12: Rx: 729-746MHz, FDD-LTE Band 13: Rx: 746-756MHz, FDD-LTE Band 17: Rx: 734-746MHz, FDD-LTE Band 25: Rx: 1930-1995MHz, FDD-LTE Band 26: Rx: 859-869MHz, FDD-LTE Band 26: Rx: 869-894MHz, TDD-LTE Band 41: Rx: 2496-2690MHz FDD-LTE Band 66: Rx: 2110-2200MHz, FDD-LTE Band 71: Rx: 617-652MHz,
RF Output Power:	Normal: FDD-LTE Band 2: 22.73dBm FDD-LTE Band 4: 22.86dBm FDD-LTE Band 5: 22.36dBm FDD-LTE Band 12: 22.47dBm FDD-LTE Band 13: 22.58dBm FDD-LTE Band 17: 22.47dBm

	<p>FDD-LTE Band 25: 21.89dBm FDD-LTE Band 26(814-824MHz): 22.59dBm FDD-LTE Band 26(824-849MHz): 22.49dBm TDD-LTE Band 41: 21.71dBm FDD-LTE Band 66: 22.31dBm FDD-LTE Band 71: 22.05dBm Sar sensor: FDD-LTE Band 2: 18.75dBm FDD-LTE Band 4: 19.86dBm FDD-LTE Band 25: 18.84dBm TDD-LTE Band 41: 18.87dBm FDD-LTE Band 66: 19.33dBm Receiver ON: FDD-LTE Band 2: 12.39dBm FDD-LTE Band 4: 13.98dBm FDD-LTE Band 25: 12.56dBm FDD-LTE Band 66: 14.10dBm Hotspot ON: FDD-LTE Band 2: 17.63dBm FDD-LTE Band 4: 19.19dBm FDD-LTE Band 25: 17.72dBm TDD-LTE Band 41: 18.99dBm FDD-LTE Band 66: 19.28dBm,</p>
Type of Modulation:	QPSK, 16QAM
Antenna Type:	Integral Antenna
Antenna Gain:	<p>FDD-LTE Band 2: -2dBi, FDD-LTE Band 4: -2dBi, FDD-LTE Band 5:-3.5dBi, FDD-LTE Band 12: -5dBi, FDD-LTE Band 13: -5dBi, FDD-LTE Band 17:-5.1dBi FDD-LTE Band 25: -2dBi FDD-LTE Band 26: -4.4dBi TDD-LTE Band 41: -2dBi FDD-LTE Band 66: -2dBi FDD-LTE Band 71: -4.5dBi</p>
5G NR	
Support Networks:	5G NR
Support Band:	n2; n5; n25; n41; n66; n71; n77
EN-DC Mode	<p>DC_2A_n77A(DL) DC_12A_n77A(DL) DC_2A_n41A(DL) DC_2C_n41A(DL)</p>

	DC_12A_n41A(DL)
Frequency Range:	5G NR n2: Tx: 1850-1910MHz, Rx: 1930-1990MHz
	5G NR n5: Tx: 824-849MHz, Rx: 869-894MHz
	5G NR 25: Tx: 1850-1915MHz, Rx: 1930-1995MHz
	5G NR n41: Tx: 2496-2690MHz, Rx: 2496-2690MHz
	5G NR n66: Tx: 1710-1780MHz, Rx: 2110-2200MHz
	5G NR n71: Tx: 663-698MHz, Rx: 617-652MHz
	5G NR n77: Tx: 3450-3550MHz, Rx: 3450-3550MHz,
	5G NR n77: Tx: 3700-3980MHz, Rx: 3700-3980MHz
Modulation Type:	DFT-s-OFDM: PI/2 BPSK QPSK / 16QAM / 64QAM / 256QAM CP-OFDM: QPSK / 16QAM / 64QAM / 256QAM
Max. RF Output Power:	Normal: 5G NR n2: 23.30dBm, 5G NR n5: 22.16dBm, 5G NR n25: 23.45dBm, 5G NR n41: 25.74dBm, 5G NR n66: 23.05dBm, 5G NR n71: 22.23dBm 5G NR n77_3450-3550MHz: 25.65dBm 5G NR n77_3700-3980MHz: 25.72dBm Sar sensor: 5G NR n2: 20.36dBm, 5G NR n25: 20.76dBm, 5G NR n41: 20.88dBm, 5G NR n66: 20.15dBm, 5G NR n77_3450-3550MHz: 17.58dBm 5G NR n77_3700-3980MHz: 17.43dBm Receiver ON: 5G NR n2: 14.49dBm, 5G NR n25: 14.48dBm, 5G NR n66: 15.01dBm, 5G NR n77_3450-3550MHz: 15.23dBm 5G NR n77_3700-3980MHz: 15.31dBm Hotspot ON: 5G NR n2: 20.55dBm, 5G NR n25: 20.76dBm, 5G NR n41: 19.82dBm, 5G NR n66: 20.12dBm, 5G NR n77_3450-3550MHz: 15.87dBm 5G NR n77_3700-3980MHz: 15.12dBm
Antenna Type:	Integral Antenna
Antenna Gain:	N2: -2dBi N5:-3.5dBi N25: -2dBi N41: -2dBi N66: -2dBi N71: -4.5dBi N77:1.2dBi

WIFI(5GHz)	
Support Standards:	802.11a, 802.11n-HT20/40, 802.11ac-VHT20/40/80, 802.11ax-VHE20/40/80
Frequency Range:	Band 1: 5180-5240MHz, Band 2: 5260-5320MHz, Band 3: 5500-5700MHz, Band 4: 5745-5825MHz
RF Output Power:	Antenna 0 Normal: 16.67dBm (Conducted) Sar sensor: 14.06dBm (Conducted) Receiver ON: 13.33dBm (Conducted) Hotspot ON: 13.49dBm (Conducted) Antenna 1 Normal: 15.89dBm (Conducted) Sar sensor: 13.50dBm (Conducted) Receiver ON: 14.44dBm (Conducted) Hotspot ON: 13.78dBm (Conducted)
Type of Modulation:	QPSK, 16QAM, 64QAM; 256QAM; 1024QAM
Type of Antenna:	Integral Antenna
Antenna Gain:	-3.8dBi
WIFI(2.4GHz)	
Support Standards:	802.11b, 802.11g, 802.11n, 802.11ax
Frequency Range:	2412-2462MHz for 802.11b/g/n-HT20, 802.11ax-HE20 2422-2452MHz for 802.11n-HT40, 802.11ax-HT40
RF Output Power:	Antenna 0 Normal: 20.91dBm (Conducted) Sar sensor: 17.99dBm (Conducted) Receiver ON: 17.80dBm (Conducted) Hotspot ON: 19.51dBm (Conducted) Antenna 1 Normal: 22.01dBm (Conducted) Sar sensor: 19.26dBm (Conducted) Receiver ON: 20.10dBm (Conducted) Hotspot ON: 19.72dBm (Conducted)
Type of Modulation:	CCK, OFDM, QPSK, BPSK, 16QAM, 64QAM
Data Rate:	1-11Mbps, 6-54Mbps, up to 150Mbps
Quantity of Channels:	11 for 802.11b/g/n-HT20 7 for 802.11n-HT40
Channel Separation:	5MHz
Antenna Type:	Integral Antenna
Antenna Gain:	-2.5dBi
Bluetooth	
Bluetooth Version:	V5.2
Frequency Range:	2402-2480MHz

RF Output Power:	15.50dBm (Conducted)
Data Rate:	1Mbps, 2Mbps, 3Mbps
Modulation:	GFSK, $\pi/4$ DQPSK, 8DPSK
Quantity of Channels:	79/40
Channel Separation:	1MHz/2MHz
Antenna Type:	Integral Antenna
Antenna Gain:	-2.5dBi
NFC	
Support Standards:	NFC
Frequency Range:	13.56MHz
Max. Field Strength:	59.02dBuV/m (at 3m)
Antenna Type:	Integral Antenna
Antenna Gain	0dBi
<i>Note: The Antenna Gain is provided by the customer and can affect the validity of results.</i>	

1.2 Test Standards

The following report is accordance with FCC 47 CFR Part 2.1093, IEEE Std C95.1: 2019, IEEE Std C95.3: 2002 + Rev. 2008, IEC/IEEE 62209-1528 Ed. 1.0 (2020-10), KDB 447498 D01 v06, KDB 648474 D04 v01r03, KDB 248227 D01 v02r02, KDB 941225 D01 v03r01, KDB 941225 D05 v02r05 , and KDB 865664 D01 v01r04 and KDB 865664 D02 v01r02.

The objective is to determine compliance with FCC Part 2.1093 of the Federal Communication Commissions rules.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with KDB 865664 D01 v01r04 and KDB 865664 D02 v01r02. The public notice KDB 447498 D01 v06 for Mobile and Portable Devices RF Exposure Procedure also.

1.4 Test Facility

Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,Block 70 Bao'an District, Shenzhen, Guangdong, China

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010. Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. Has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

2. Summary of Test Results

The maximum results of Specific Absorption Rate (SAR) have found during testing are as follows:

Frequency Band	Head SAR	Body-worn (10mm Gap)	Hotspot (10mm Gap)	SAR _{1g} Limit (W/kg)
	Maximum SAR _{1g} (W/kg)	Maximum SAR _{1g} (W/kg)	Maximum SAR _{1g} (W/kg)	
GSM	0.685	0.494	0.669	1.6
WCDMA	0.421	0.595	0.355	1.6
LTE	0.734	0.647	0.647	1.6
NR	0.038	0.060	0.039	1.6
WLAN 5GHz	0.431	0.265	0.083	1.6
WLAN 2.4GHz	0.295	0.281	0.124	1.6
Bluetooth	0.209	0.135	0.135	1.6
Simultaneous Transmission	1.502	1.141	0.887	1.6

The device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR Part 2.1093 and IEEE Std C95.1: 2019, and had been tested in accordance with the measurement methods and procedure specified in IEC/IEEE 62209-1528 Ed. 1.0 (2020-10) and KDB 865664 D01 v01r04 and KDB 865664 D02 v01r02.

3. Specific Absorption Rate (SAR)

3.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

3.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$SAR = C \left(\frac{\delta T}{\delta t} \right)$$

Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

4. SAR Measurement System

4.1 The Measurement System

Comosar is a system that is able to determine the SAR distribution inside a phantom of human being according to different standards. The Comosar system consists of the following items:

- Main computer to control all the system
- 6 axis robot
- Data acquisition system
- Miniature E-field probe
- Phone holder
- Head simulating tissue

The following figure shows the system.



The EUT under test operating at the maximum power level is placed in the phone holder, under the phantom, which is filled with head simulating liquid. The E-Field probe measures the electric field inside the phantom. The OpenSAR software computes the results to give a SAR value in a 1g or 10g mass.


4.2 Probe

For the measurements the Specific Dosimetric E-Field Probe SSE2 SN 45/15 EPGO280 with following specifications is used

- Dynamic range: 0.01-100 W/kg
- Probe Length: 330 mm
- Length of Individual Dipoles: 4.5 mm
- Maximum external diameter: 8 mm
- Probe Tip External Diameter : 5 mm

- Distance between dipoles / probe extremity: 2.7mm
 - Probe linearity: <0.25 dB
 - Axial Isotropy: <0.25 dB
 - Spherical Isotropy: <0.50 dB
 - Calibration range: 700 to 3000MHz for head & body simulating liquid.
- Angle between probe axis (evaluation axis) and surface normal line: less than 30°

Probe calibration is realized, in compliance with EN 62209-1 and IEC/IEEE 62209-1528 Ed. 1.0 (2020-10) STD, with CALISAR, Antenna proprietary calibration system. The calibration is performed with the EN 62209-1 annexes technique using reference guide at the five frequencies.

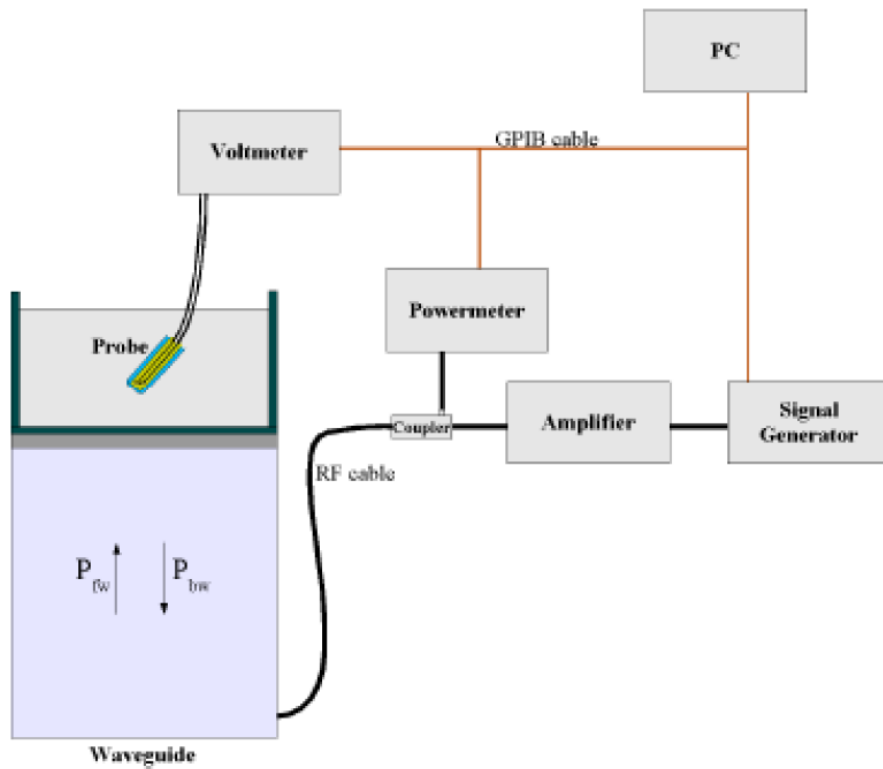

$$SAR = \frac{4(P_{fw} - P_{bw})}{ab\delta} \cos^2\left(\pi \frac{y}{a}\right) e^{-2z/\delta}$$

Where :

P_{fw} = Forward Power

P_{bw} = Backward Power

a and b = Waveguide dimensions

δ = Skin depth

Keithley configuration:

Rate = Medium; Filter = ON; RDGS = 10; Filter type = Moving Average; Range auto after each calibration, a SAR measurement is performed on a validation dipole and compared with a NPL calibrated probe, to verify it.

Waltek Testing Group (Shenzhen) Co., Ltd.

[Http://www.waltek.com.cn](http://www.waltek.com.cn)

The calibration factors, CF(N), for the 3 sensors corresponding to dipole 1, dipole 2 and dipole 3 are:

$$CF(N)=SAR(N)/V_{lin}(N) \quad (N=1,2,3)$$

The linearised output voltage $V_{lin}(N)$ is obtained from the displayed output voltage $V(N)$ using

$$V_{lin}(N)=V(N)*(1+V(N)/DCP(N)) \quad (N=1,2,3)$$

where DCP is the diode compression point in mV.

4.3 Probe Calibration Process

Dosimetric Assessment Procedure

Each E-Probe/Probe Amplifier combination has unique calibration parameters. SATIMO Probe calibration procedure is conducted to determine the proper amplifier settings to enter in the probe parameters. The amplifier settings are determined for a given frequency by subjecting the probe to a known E-field density (1 mW/cm²) using an with CALISAR, Antenna proprietary calibration system.

Free Space Assessment Procedure

The free space E-field from amplified probe outputs is determined in a test chamber. This calibration can be performed in a TEM cell if the frequency is below 1 GHz and in a waveguide or other methodologies above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is rotated 360 degrees until the three channels show the maximum reading. The power density readings equates to 1mW/cm².

Temperature Assessment Procedure

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated head tissue. The E-field in the medium correlates with the temperature rise in the dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

Where:

$$SAR = C \frac{\Delta T}{\Delta t}$$

Δt = exposure time (30 seconds),

C = heat capacity of tissue (brain or muscle),

ΔT = temperature increase due to RF exposure.

SAR is proportional to $\Delta T/\Delta t$, the initial rate of tissue heating, before thermal diffusion takes place. The electric field in the simulated tissue can be used to estimate SAR by equating the thermally derived SAR to that with the E- field component.

$$SAR = \frac{|E|^2 \cdot \sigma}{\rho}$$

Where:

σ = simulated tissue conductivity,


ρ = Tissue density (1.25 g/cm³ for brain tissue)

4.4 Phantom

For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The phantom is a polyurethane shell integrated in a wooden table. The thickness of the phantom amounts to 2mm +/- 0.2mm. It enables the dosimetric evaluation of left and right phone usage and includes an additional flat phantom part for the simplified performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.

4.5 Device Holder

The positioning system allows obtaining cheek and tilting position with a very good accuracy. In compliance with CENELEC, the tilt angle uncertainty is lower than 1°.

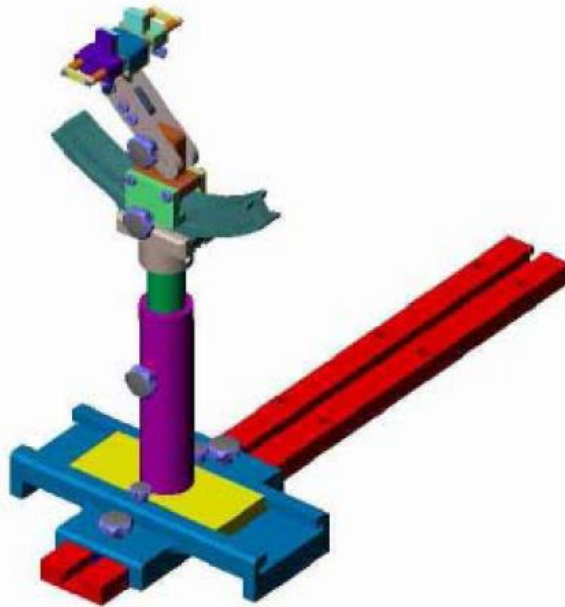

System Material	Permittivity	Loss Tangent
Delrin	3.7	0.005


4.6 Test Equipment List

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
E-Field Probe	MVG	SSE2	SN 18/21 EPGO356	2022-07-08	2023-07-07
750MHz Dipole	MVG	SID750	SN 09/15 DIP 0G750-357	2020-08-29	2023-08-28
835MHz Dipole	MVG	SID835	SN 09/15 DIP 0G835-358	2020-08-29	2023-08-28
1800MHz Dipole	MVG	SID1800	SN 09/15 DIP 1G800-360	2020-08-29	2023-08-28
1900MHz Dipole	MVG	SID1900	SN 09/15 DIP 1G900-361	2020-08-29	2023-08-28
2450MHz Dipole	MVG	SID2450	SN 09/15 DIP 2G450-363	2020-08-29	2023-08-28
2600MHz Dipole	MVG	SID2600	SN 28/21 DIP 2G600-590	2021-07-16	2024-07-15
3500MHz Dipole	MVG	SID3500	SN 28/21 DIP 3G500-592	2021-07-19	2024-07-18
3700MHz Dipole	MVG	SID3700	SN 28/21 DIP 3G700-593	2021-07-19	2024-07-18
3900MHz Dipole	MVG	SID3900	SN 28/21 DIP 3G900-594	2021-07-19	2024-07-18
5 GHz Dipole	MVG	SWG5500	SN 49/16 WGA45	2020-07-03	2023-07-02
Dielectric Probe	SATIMO	SCLMP	SN 47/12 OCPG49	2023-02-25	2024-02-24
SAM Phantom	SATIMO	SAM	SN/ 47/12 SAM95	N/A	N/A
Multi Meter	Keithley	Keithley 2000	4006367	2023-02-25	2024-02-24
Power meter	Keithley	3500	JC-2017-09-001(A)	2023-02-25	2024-02-24
Power meter	Keithley	3500	JC-2017-09-001(B)	2023-02-25	2024-02-24
Power Sensor	HP	11636B	JC-2017-10-002	2023-02-25	2024-02-24
EXG Analog Signal Generator	KEYSIGHT	N5173B	MY61252892	2023-02-25	2024-02-24
Universal Tester	Rohde & Schwarz	CMU200	112315	2023-02-25	2024-02-24
Universal Radio Communication Tester	Rohde & Schwarz	CMW500	148650	2023-02-25	2024-02-24
Network Analyzer	HP	8753C	2901A00831	2023-02-25	2024-02-24


5. Tissue Simulating Liquids

5.1 Composition of Tissue Simulating Liquid

For the measurement of the field distribution inside the SAM phantom with SMTIMO, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm. Please see the following photos for the liquid height.

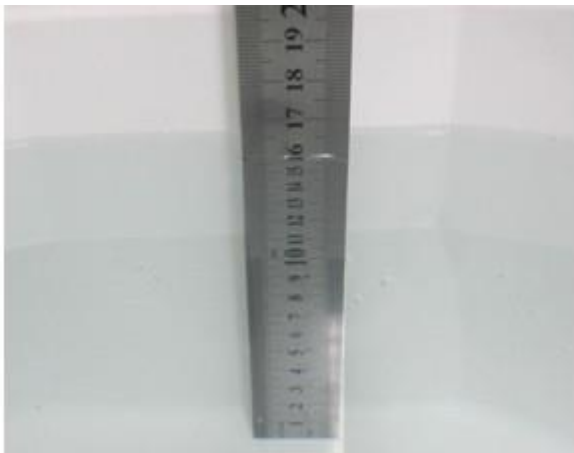

Liquid Height for Head SAR

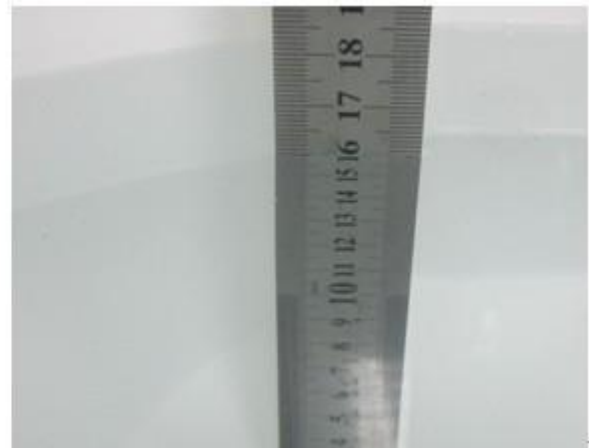

Liquid Height for Body SAR

The Composition of Tissue Simulating Liquid

Frequency (MHz)	Water (%)	Salt (%)	Sugar (%)	HEC (%)	Preventol (%)	DGBE (%)
Head/Body						
750	41.1	1.4	57.0	0.2	0.3	0
835	40.3	1.4	57.9	0.2	0.2	0
1700-1900	55.2	0.3	0	0	0	44.5
2450	55.0	0.1	0	0	0	44.9
2600	54.9	0.1	0	0	0	45.0
3500	71.6	1.3	10.9	0.7	0.7	14.8
3700	71.7	1.3	10.8	0.6	0.8	14.8
3900	71.7	1.3	10.8	0.6	0.8	14.8

Frequency (MHz)	Water (%)	Hexyl Carbitol (%)	Triton X-100 (%)
Head/Body			
5000-6000	65.52	17.24	17.24

5.2 Tissue Dielectric Parameters for Head and Body Phantoms

According to FCC KDBs, IEC/IEEE 62209-1528 Ed. 1.0 (2020-10) and CEI/IEC 62209 standards state that the system validation measurements must be performed using a reference dipole meeting the fore mentioned return loss and mechanical dimension requirements. The validation measurement must be performed against a liquid filled flat phantom, with the phantom constructed as outlined in the fore mentioned standards. Per the standards, the dipole shall be positioned below the bottom of the phantom, with the dipole length centered and parallel to the longest dimension of the flat phantom, with the top surface of the dipole at the described distance from the bottom surface of the phantom.

Target Frequency (MHz)	Head		Body	
	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity (σ)	Permittivity (ϵ_r)
150	0.76	52.3	0.80	61.9
300	0.87	45.3	0.92	58.2
450	0.87	43.5	0.94	56.7
750	0.89	41.9	0.96	55.5
835	0.90	41.5	0.97	55.2
900	0.97	41.5	1.05	55.0
915	0.98	41.5	1.06	55.0
1450	1.20	40.5	1.30	54.0
1610	1.29	40.3	1.40	53.8
1800-2000	1.40	40.0	1.52	53.3
2450	1.80	39.2	1.95	52.7
2600	1.96	39.0	2.16	52.5
3000	2.40	38.5	2.73	52.0
3300	2.88	37.2	3.04	49.3
3500	3.07	36.5	3.29	48.6
3700	3.35	35.2	3.62	47.1
3900	3.62	34.6	4.07	46.7
4200	3.58	37.2	4.08	48.9
5200	4.66	36.0	5.30	49.0
5400	4.86	35.8	5.53	48.7
5600	5.07	35.5	5.77	48.5
5800	5.27	35.3	6.00	48.2

5.3 Tissue Calibration Result

The dielectric parameters of the liquids were verified prior to the SAR evaluation using COMOSAR Dielectric Probe Kit and an Agilent Network Analyzer.

Calibration Result for Dielectric Parameters of Tissue Simulating Liquid

Head/Body Tissue Simulating Liquid									
Freq. MHz.	Temp. (°C)	Conductivity			Permittivity			Limit (%)	Date
		Reading (σ)	Target (σ)	Delta (%)	Reading (ϵ_r)	Target (ϵ_r)	Delta (%)		
750	22.5	0.86	0.89	-3.37	42.28	41.90	0.91	±5	2023-05-29
835	22.5	0.87	0.90	-3.33	42.26	41.50	1.83	±5	2023-05-29
1800	22.2	1.37	1.40	-2.14	39.54	40.00	-1.15	±5	2023-06-01
1900	22.2	1.37	1.40	-2.14	39.52	40.00	-1.20	±5	2023-06-01
2450	22.1	1.76	1.80	-2.22	39.12	39.20	-0.20	±5	2023-06-05
2600	22.1	1.93	1.96	-1.53	38.87	39.0	-0.33	±5	2023-06-05
3500	22.4	3.04	3.07	-0.98	36.42	36.5	-0.22	±5	2023-06-15
3700	22.4	3.33	3.35	-0.60	35.12	35.2	-0.23	±5	2023-06-15
3900	22.4	3.65	3.62	0.83	34.27	34.6	-0.95	±5	2023-06-15
5200	22.5	4.70	4.66	0.86	36.53	36.0	1.47	±5	2023-06-10
5400	22.5	4.82	4.86	-0.82	36.51	35.8	1.98	±5	2023-06-10
5600	22.5	5.10	5.07	0.59	36.68	35.5	3.32	±5	2023-06-13
5800	22.5	5.18	5.27	-1.71	36.27	35.3	2.75	±5	2023-06-13


6. SAR Measurement Evaluation

6.1 Purpose of System Performance Check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

6.2 System Setup

In the simplified setup for system evaluation, the EUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave which comes from a signal generator at frequency 835MHz ,1800MHz, 1900MHz 2450MHz,2600MHz,and 5GHz. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom.

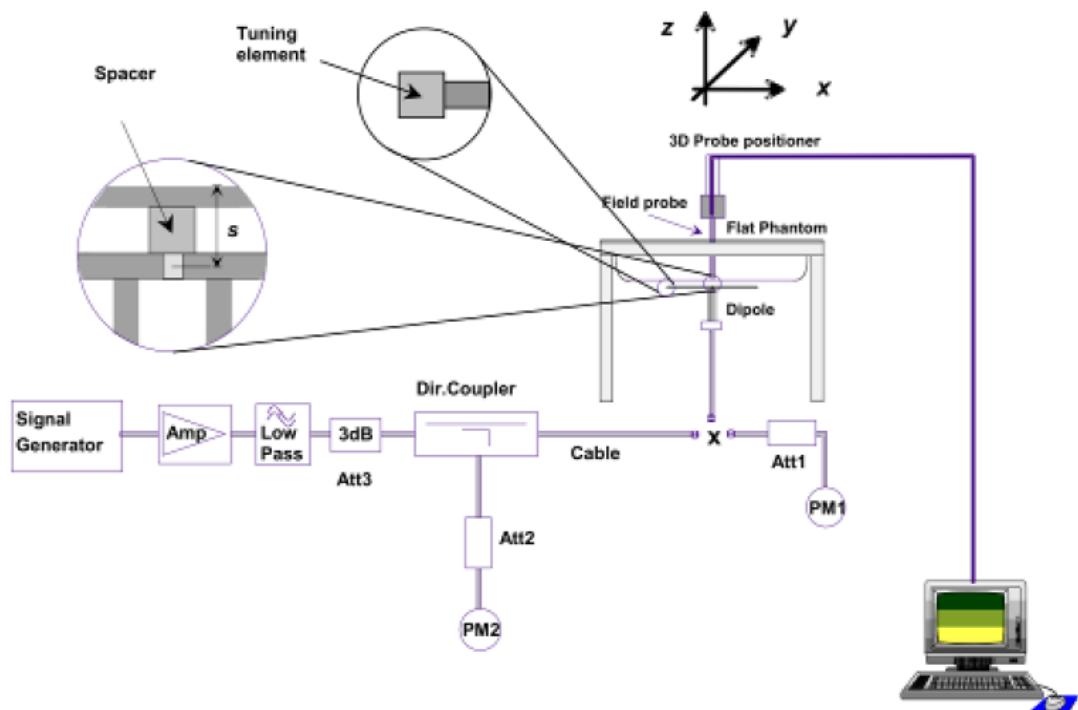

System Verification Setup Block Diagram



Setup Photo of Dipole Antenna

The output power on dipole port must be calibrated to 24 dBm(250 mW) before dipole is connected.
 The output power on 5 GHz Waveguide must be calibrated to 20 dBm (100mW) before 5 GHz Waveguide is connected.

6.3 Validation Results

Comparing to the original SAR value provided by SATIMO, the validation data should be within its specification of 10 %. Table 6.1 shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion.

Frequency	Targeted SAR _{1g}	Measured SAR _{1g}	Normalized SAR _{1g}	Tolerance	Date
MHz	(W/kg)	(W/kg)	(W/kg)	(%)	
Head/Body					
750	8.78	2.16	8.64	-1.59	2023-05-29
835	9.58	2.41	9.64	0.63	2023-05-29
1800	38.76	9.61	38.44	-0.83	2023-06-01
1900	39.49	9.91	39.64	0.38	2023-06-01
2450	54.31	13.45	53.8	-0.94	2023-06-05
2600	56.81	13.67	54.68	-3.75	2023-06-05
3500	68.86	16.14	64.56	-6.24	2022-06-15
3700	67.40	15.39	61.56	-8.66	2022-06-15
3900	67.42	15.93	63.72	-5.49	2022-06-15
5200	161.23	16.946	169.46	5.10	2022-06-10

Reference No.: WTX22X08156486W

5400	165.58	17.111	171.11	3.34	2022-06-10
5600	173.58	17.330	173.30	-0.16	2022-06-13
5800	179.32	18.604	186.04	3.75	2022-06-13

Remark: Referring to IEC/IEEE 62209-1528 Ed. 1.0 (2020-10), the system check shall be performed at a test frequency that is within $\pm 10\%$ or ± 100 MHz of the compliance test mid-band frequency, so the 1750 MHz system verification is made of 1800MHz Dipole.

Targeted and Measurement SAR

Please refer to Annex A for the plots of system performance check.

7. EUT Testing Position

7.1 Define Two Imaginary Lines on The Handset

(a) The vertical centerline passes through two points on the front side of the handset - the midpoint of the width w_t of the handset at the level of the acoustic output, and the midpoint of the width w_b of the bottom of the handset.

(b) The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output. The horizontal line is also tangential to the face of the handset at point A.

(c) The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the Front Side of the handset, especially for clamshell handsets, handsets with flip covers, and other irregularly shaped handsets.

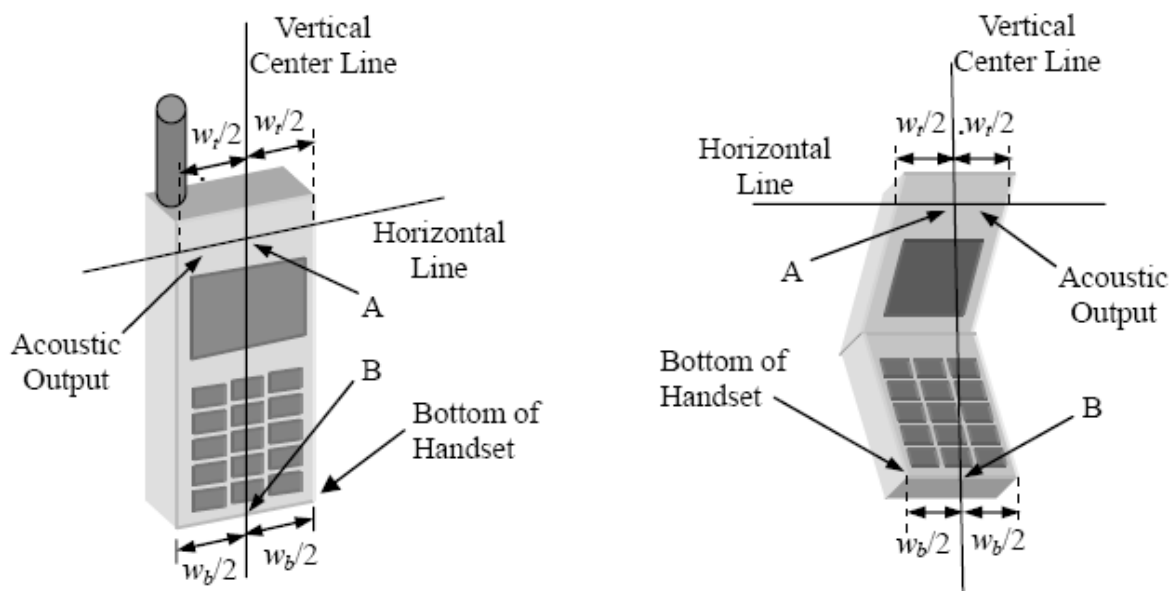


Illustration for Handset Vertical and Horizontal Reference Lines

7.2 Cheek Position

(a) To position the device with the vertical center line of the body of the device and the horizontal line crossing the center piece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the three ear and mouth reference point (M: Mouth, RE: Right Ear, and LE: Left Ear) and align the center of the ear piece with the line RE-LE.

(b) To move the device towards the phantom with the ear piece aligned with the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with the ear, move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost (see Fig. 7.2).

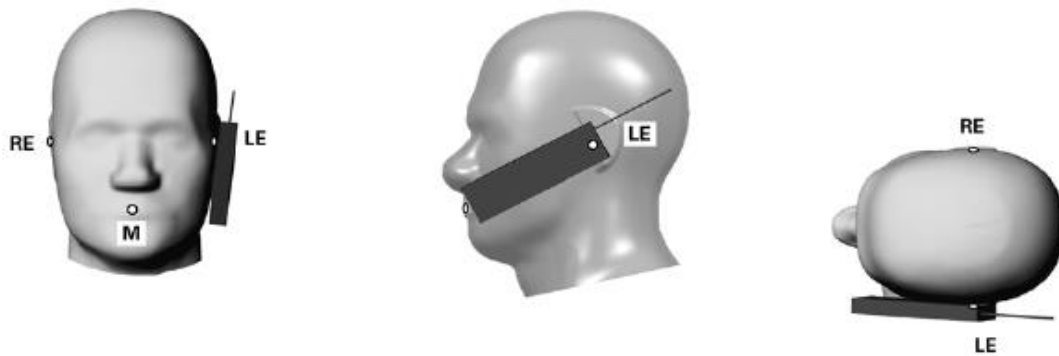


Illustration for Cheek Position

7.3 Tilted Position

(a) To position the device in the “cheek” position described above.

(b) While maintaining the device the reference plane described above and pivoting against the ear, moves it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost (see Fig. 7.3).

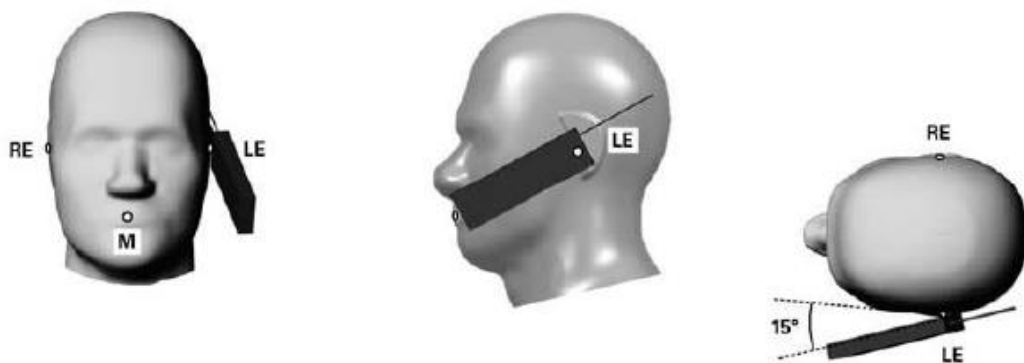


Illustration for Tilted Position

7.4 Body Position

- (a) To position the device parallel to the phantom surface with each side.
- (b) To adjust the device parallel to the flat phantom.
- (c) To adjust the distance between the device surface and the flat phantom to 10mm.


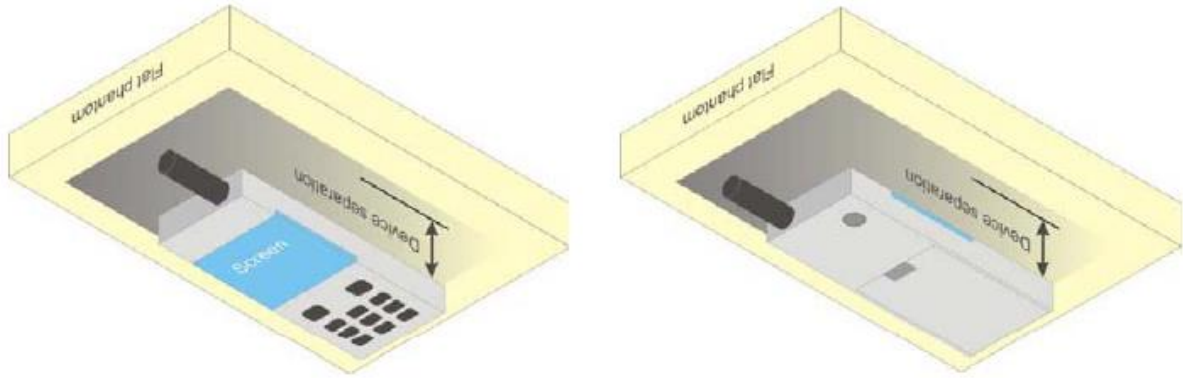


Illustration for Body Position

7.5 EUT Antenna Position

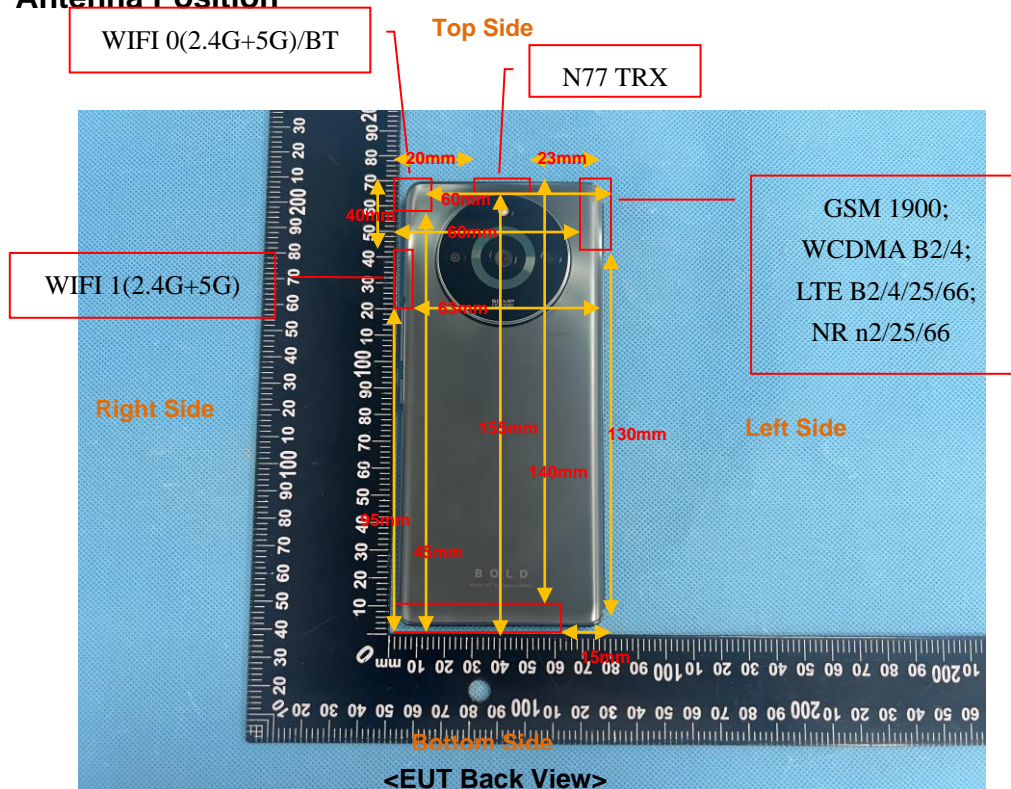

EUT Size: Long*Width =163mm*75mm
 Block Diagram for EUT Antenna Position

Distance of EUT antenna-to-edge/surface(mm), Test distance:10mm						
Antennas	Back side	Front side	Left Edge	Right Edge	Top Edge	Bottom Edge
GSM850; WCDMA B5; 4G: B5, B12, B13, B17, B26, B71, B41 5G NR: n5, n71, n41	<25	<25	<25	<25	140	<25
GSM1900; WCDMA B2; WCDMA B4, 4G:B2, B4, B25, B66 5G NR: n2, n25, n66	<25	<25	<25	60	<25	130
5G NR_n77	<25	<25	<25	<25	<25	155
WLAN 0/Bluetooth	<25	<25	60	<25	<25	145
WLAN 1	<25	<25	63	<25	40	95

7.6 EUT Testing Position

Head/Body mode SAR assessments are required for this device. This EUT was tested in different positions for different SAR test modes, more information as below:

Head SAR tests				
Antennas	Right Cheek	Left Cheek	Right Tilted	Left Tilted
GSM850; WCDMA B5; 4G: B5, B12, B13, B17, B26, B71, B41 5G NR: n5, n71, n41	Yes	Yes	Yes	Yes
GSM1900; WCDMA B2; WCDMA B4, 4G:B2, B4, B25, B66 5G NR: n2, n25, n66	Yes	Yes	Yes	Yes
5G NR_n77	Yes	Yes	Yes	Yes
WLAN 0/Bluetooth	Yes	Yes	Yes	Yes
WLAN 1	Yes	Yes	Yes	Yes

Body-worn SAR tests, Test distance: 10mm		
Antennas	Front	Back
GSM850; WCDMA B5; 4G: B5, B12, B13, B17, B26, B71, B41 5G NR: n5, n71, n41	Yes	Yes
GSM1900; WCDMA B2; WCDMA B4, 4G:B2, B4, B25, B66 5G NR: n2, n25, n66	Yes	Yes
5G NR_n77	Yes	Yes
WLAN 0/Bluetooth	Yes	Yes

WLAN 1	Yes	Yes
--------	-----	-----

Hotspot SAR tests, Test distance: 10mm						
Antennas	Front	Back	Left Side	Right Side	Top Side	Bottom Side
GSM850; WCDMA B5; 4G: B5, B12, B13, B17, B26, B71, B41 5G NR: n5, n71, n41	Yes	Yes	Yes	Yes	No	Yes
GSM1900; WCDMA B2; WCDMA B4, 4G: B2, B4, B25, B66 5G NR: n2, n25, n66	Yes	Yes	Yes	No	Yes	No
5G NR_n77	Yes	Yes	Yes	No	Yes	No
WLAN0/Bluetooth	Yes	Yes	No	Yes	Yes	No
WLAN 1	Yes	Yes	No	No	Yes	No

Remark:

- Referring to KDB 941225 D06, when the overall device length and width are $\geq 9\text{cm} \times 5\text{cm}$, the Hotspot ON test separation distances is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge.
- Referring to KDB 447498 D01v06, a conservative minimum test separation distance for supporting off-the-shelf body-worn accessories that may be acquired by users of consumer handsets should be used to test for body-worn accessory SAR compliance. This distance is determined by the handset manufacturer according to the typical body-worn accessories users may acquire at the time of equipment certification, but not more than 2.5 cm, to enable users to purchase aftermarket body-worn accessories with the required minimum separation.
- Referring to KDB 648474 D04 Handset SAR v01r03, 10-g extremity SAR is required only for the surfaces and edges with Hotspot ON 1-g reported SAR $> 1.2 \text{ W/kg}$.

Please refer to Annex D for the EUT test setup photos.

8. SAR Measurement Procedures

8.1 Measurement Procedures

The measurement procedures are as follows:

- (a) Use base station simulator (if applicable) or engineering software to transmit RF power continuously (continuous Tx) in the highest power channel.
- (b) Keep EUT to radiate maximum output power or 100% factor (if applicable)
- (c) Measure output power through RF cable and power meter.
- (d) Place the EUT in the positions as Annex D demonstrates.
- (e) Set scan area, grid size and other setting on the SATIMO software.
- (f) Measure SAR results for the highest power channel on each testing position.
- (g) Find out the largest SAR result on these testing positions of each band
- (h) Measure SAR results for other channels in worst SAR testing position if the SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

8.2 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The SATIMO software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine. The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

8.3 Area & Zoom Scan Procedures

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan measures 5x5x7 points with step size 8, 8 and 5 mm for 300 MHz to 3 GHz, and 8x8x8 points with step size 4, 4 and 2.5 mm for 3 GHz to 6 GHz. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g.

8.4 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing (step-size is 4, 4 and 2.5 mm). When all volume scan were completed, the software can combine and subsequently superpose these measurement data to calculating the multiband SAR.

8.5 SAR Averaged Methods

The local SAR inside the phantom is measured using small dipole sensing elements inside a probe body. The probe tip must not be in contact with the phantom surface in order to minimize measurements errors, but the highest local SAR will occur at the surface of the phantom.

An extrapolation is using to determinate this highest local SAR values. The extrapolation is based on a fourth-order least-square polynomial fit of measured data. The local SAR value is then extrapolated from the liquid surface with a 1mm step.

The measurements have to be performed over a limited time (due to the duration of the battery) so the step of measurement is high. It could vary between 5 and 8 mm. To obtain an accurate assessment of the maximum SAR averaged over 10g and 1 g requires a very fine resolution in the three dimensional scanned data array.

8.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In SATIMO measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drift more than 5%, the SAR will be retested.

9. SAR Test Result

9.1 Conducted RF Output Power

Summary of Power Reduction:

1. Device is support **Receiver ON/ Hotspot / Sensor ON** reduced power, there are GSM1900&WCDMA B2/4<E B2/4/25/66&5G NR n2/25/66/77 support **Receiver ON**, there are GSM850/1900&WCDMA B2/4/5<E B2/4/25/41/66&5G NR n2/25/41/66/77 support **Hotspot**, there are GSM1900&WCDMA B2/4<E B2/4/25/41/66&5G NR n2/25/41/66/77 support **Sensor ON**. The priority order is Receiver ON to Hotspot to Sensor on.
2. WIFI2.4GHz&WIFI5GHz are support **Receiver ON/ Sensor ON** reduced power; WIFI2.4GHz/ WIFI5.2GHz /WIFI5.8GHz support **Hotspot**.


Reduced power off	Receiver ON	Hotspot	Sensor ON
Power Level P1	Power Level P2	Power Level P3	Power Level P4

Note:

The power management for SAR compliance at different exposure conditions (head, hotspot). The device will invoke corresponding work scenarios power level base on frequency bands/antennas. Refer to the KDB 388624 D02 Pre-Approval Guidance List v18r03.


9.1.1 Proximity Sensor Triggering Test

1. Proximity sensor triggering distances:

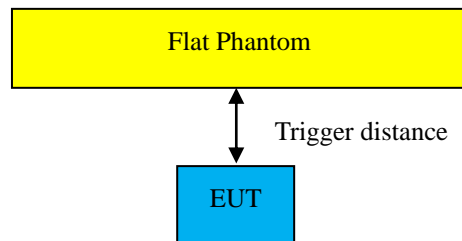


Position	Front side	Back side	Top side	Bottom side	Left side	Right side
Minimum	0	No	No	No	No	No
Required SAR Test	10	10	10	10	10	10

DUT Moving Away the Phantom Output Power:

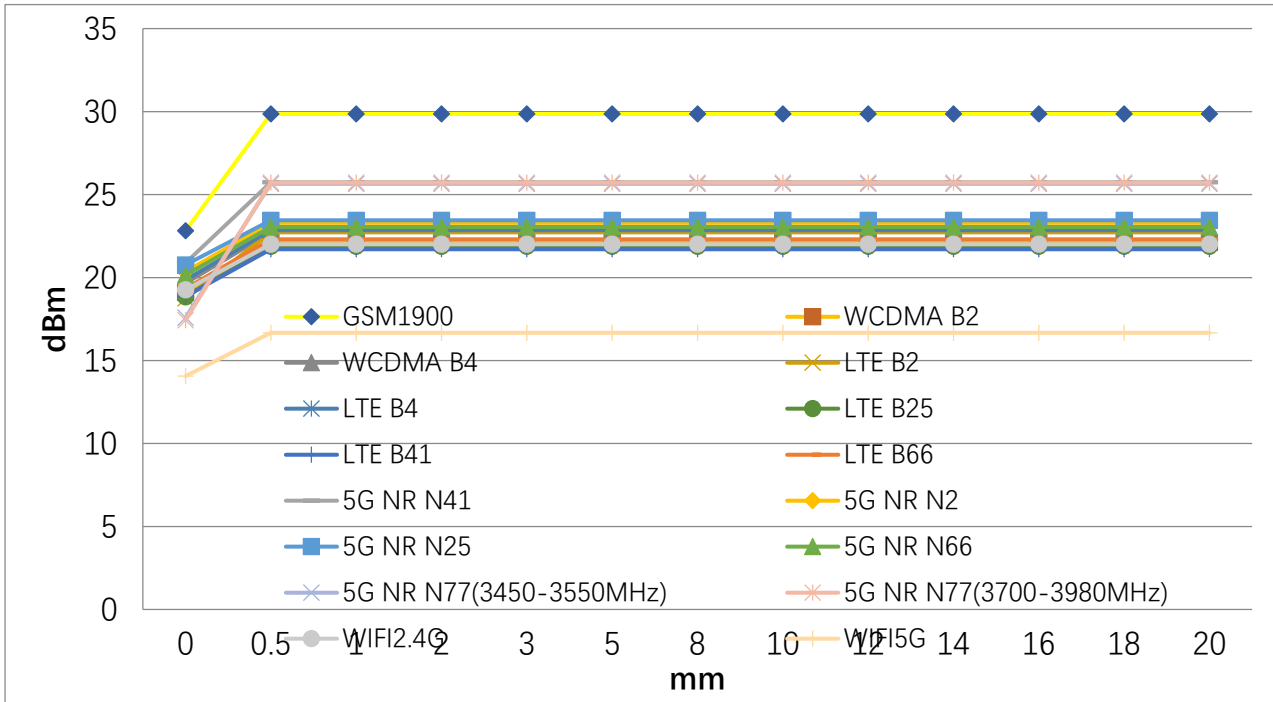

DUT Moving Toward the Phantom Output Power:

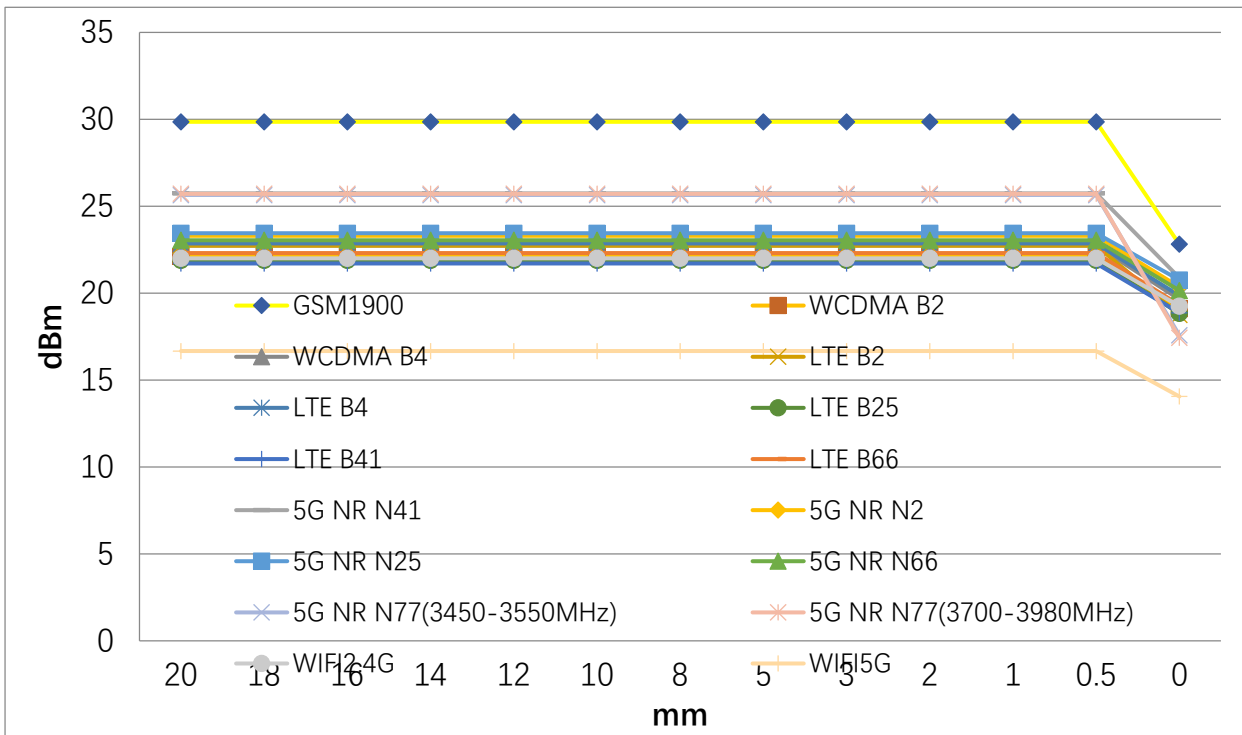


2. Proximity sensor coverage:

If a sensor is spatially offset from the antenna(s), it is necessary to verify sensor triggering for conditions where the antenna is next to the user but the sensor is laterally further away to ensure sensor coverage is sufficient for reducing the power to maintain compliance. For p-sensor coverage testing, the device is moved and "along the direction of maximum antenna and sensor offset".

The proximity sensor and main antenna use same metallic electrode, so there is no spatial offset.

3. Device tilt angle influences to proximity sensor triggering

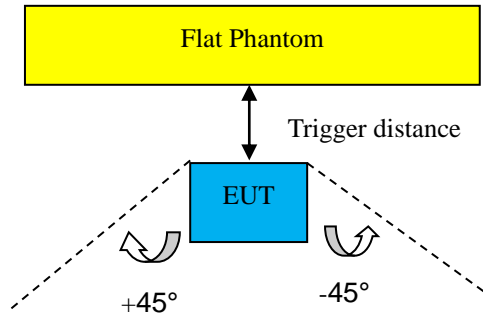

Summary of Tablet Tilt Angle Influence to Proximity Sensor Triggering												
Band	Min. trigger distance and maintained over $\pm 45^\circ$	Power Reduction Status										
		-45°	-35°	-25°	-15°	-5°	-0°	-5°	-15°	-25°	-35°	-45°
GSM1900	front side: 0mm	off	off	off	off	off	on	off	off	off	off	off
WCDMA B2	front side: 0mm	off	off	off	off	off	on	off	off	off	off	off
WCDMA B4	front side: 0mm	off	off	off	off	off	on	off	off	off	off	off
LTE B2	front side: 0mm	off	off	off	off	off	on	off	off	off	off	off
LTE B4	front side: 0mm	off	off	off	off	off	on	off	off	off	off	off
LTE B25	front side: 0mm	off	off	off	off	off	on	off	off	off	off	off
LTE B41	front side: 0mm	off	off	off	off	off	on	off	off	off	off	off
LTE 66	front side: 0mm	off	off	off	off	off	on	off	off	off	off	off
5G NR N41	front side: 0mm	off	off	off	off	off	on	off	off	off	off	off
5G NR N2	front side: 0mm	off	off	off	off	off	on	off	off	off	off	off
5G NR N25	front side: 0mm	off	off	off	off	off	on	off	off	off	off	off
5G NR N66	front side: 0mm	off	off	off	off	off	on	off	off	off	off	off
5G NR N77	front side: 0mm	off	off	off	off	off	on	off	off	off	off	off
WIFI	front side: 0mm	off	off	off	off	off	on	off	off	off	off	off

SAR test plan:

For front side, the worst trigger distance of proximity sensor is 0mm, thus we test these side in 10mm without power reduction.

9.1.2 Conducted RF Output power result:

GSM - Burst Average Power (dBm)								
Band	GSM850(P1)			Tune-up power (dBm)	PCS1900(P1)			Tune-up power (dBm)
Channel	128	190	251		512	661	810	
Frequency (MHz)	824.2	836.6	848.8		1850.2	1880	1909.8	
GSM	32.68	32.50	32.55	33.0	29.72	29.77	29.74	30.0
GPRS (1 slot)	32.66	32.47	32.52	33.0	29.81	29.86	29.85	30.0
GPRS (2 slots)	31.15	30.98	31.02	31.5	28.30	28.37	28.35	28.5
GPRS (3 slots)	29.68	29.51	29.53	30.0	26.82	26.90	26.90	27.0
GPRS (4 slots)	28.58	28.43	28.46	29.0	25.72	25.82	25.79	26.0
EDGE (1 slot)	26.65	26.83	26.64	27.0	25.81	25.81	25.62	26.0
EDGE (2 slots)	25.58	25.76	25.59	26.0	24.76	24.80	24.65	25.0
EDGE (3 slots)	23.40	23.56	23.38	24.0	22.59	22.64	22.49	23.0
21EDGE (4 slots)	22.23	22.39	22.24	22.5	21.32	21.36	21.25	21.5

GSM - Source-Based Time-Average Power (dBm)								
Band	GSM850(P1)			Tune-up power (dBm)	PCS1900(P1)			Tune-up power (dBm)
Channel	128	190	251		512	661	810	
Frequency (MHz)	824.2	836.6	848.8		1850.2	1880	1909.8	
GSM	23.68	23.50	23.55	24.0	20.72	20.77	20.74	21.0
GPRS (1 slot)	23.66	23.47	23.52	24.0	20.81	20.86	20.85	21.0
GPRS (2 slots)	25.15	24.98	25.02	25.5	22.30	22.37	22.35	22.5
GPRS (3 slots)	25.43	25.26	25.28	25.5	22.57	22.65	22.65	23.0
GPRS (4 slots)	25.58	25.43	25.46	26.0	22.72	22.82	22.79	23.0
EDGE (1 slot)	17.65	17.83	17.64	18.0	16.81	16.81	16.62	17.0
EDGE (2 slots)	19.58	19.76	19.59	20.0	18.76	18.80	18.65	19.0
EDGE (3 slots)	19.15	19.31	19.13	19.5	18.34	18.39	18.24	18.5
EDGE (4 slots)	19.23	19.39	19.24	19.5	18.32	18.36	18.25	18.5

Note: The source-based time-averaged power is linearly scaled the maximum burst averaged power based on time slots. The calculated method are shown as below:

Source based time-average power = Burst averaged power - Duty cycle factor in dB

Duty cycle factor = 9 dB for 1 Tx slot, 6 dB for 2 Tx slots, 4.25 dB for 3 Tx slots, 3 dB for 4 Tx slots

GSM - Burst Average Power (dBm)								
Band	GSM 1900 (P4)			Tune-up power (dBm)	GSM 1900 (P2)			Tune-up power (dBm)
Channel	512	661	810		512	661	810	
Frequency (MHz)	1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM	22.81	22.72	22.76	23.0	21.59	21.73	21.70	22.0
GPRS (1 slot)	22.69	22.82	22.82	23.0	21.59	21.72	21.71	22.0
GPRS (2 slots)	21.61	22.74	21.72	23.0	20.66	20.82	20.80	21.0
GPRS (3 slots)	19.58	19.76	19.72	20.0	18.62	18.86	18.79	19.0
GPRS (4 slots)	18.62	18.83	18.78	19.0	17.55	17.76	17.70	18.0
EDGE (1 slot)	18.02	18.01	18.83	19.0	17.87	17.98	17.82	18.0
EDGE (2 slots)	17.68	17.80	17.66	18.0	16.67	16.70	16.60	17.0
EDGE (3 slots)	15.43	15.48	15.30	15.5	14.36	14.42	14.30	14.5
EDGE (4 slots)	14.09	14.14	13.98	14.5	13.00	13.05	12.94	13.5

GSM - Source-Based Time-Average Power (dBm)								
Band	GSM 1900 (P4)			Tune-up power (dBm)	GSM 1900 (P2)			Tune-up power (dBm)
Channel	128	190	251		512	661	810	
Frequency (MHz)	824.2	836.6	848.8		1850.2	1880	1909.8	
GSM	13.81	13.72	13.76	14.0	12.59	12.73	12.70	13.0
GPRS (1 slot)	13.69	13.82	13.82	14.0	12.59	12.72	12.71	13.0
GPRS (2 slots)	15.61	16.74	15.72	17.0	14.66	14.82	14.80	15.0
GPRS (3 slots)	15.33	15.51	15.47	16.0	14.37	14.61	14.54	15.0
GPRS (4 slots)	15.62	15.83	15.78	16.0	14.55	14.76	14.70	15.0
EDGE (1 slot)	9.02	9.01	9.83	10.0	8.87	8.98	8.82	9.0
EDGE (2 slots)	11.68	11.80	11.66	12.0	10.67	10.70	10.60	11.0
EDGE (3 slots)	11.18	11.23	11.05	11.5	10.11	10.17	10.05	10.5
EDGE (4 slots)	11.09	11.14	10.98	11.5	10.00	10.05	9.94	10.5

Note: The source-based time-averaged power is linearly scaled the maximum burst averaged power based on time slots. The calculated method are shown as below:

Source based time-average power = Burst averaged power - Duty cycle factor in dB

Duty cycle factor = 9 dB for 1 Tx slot, 6 dB for 2 Tx slots, 4.25 dB for 3 Tx slots, 3 dB for 4 Tx slots

GSM - Burst Average Power (dBm)								
Band	GSM 850 (P3)			Tune-up power (dBm)	GSM 1900 (P3)			Tune-up power (dBm)
Channel	128	190	251		512	661	810	
Frequency (MHz)	824.2	836.6	848.8		1850.2	1880	1909.8	
GSM	30.75	30.62	30.63	31.0	22.74	22.89	22.87	23.0
GPRS (1 slot)	30.76	30.59	30.59	31.0	22.82	22.95	22.93	23.0
GPRS (2 slots)	29.81	28.65	29.63	30.0	21.73	21.87	21.84	22.0
GPRS (3 slots)	27.80	27.66	27.65	28.0	19.69	19.89	19.84	20.0
GPRS (4 slots)	26.74	26.60	26.57	27.0	18.73	18.96	18.90	19.0
EDGE (1 slot)	24.61	24.78	24.99	25.0	18.93	18.97	18.87	19.0
EDGE (2 slots)	23.80	23.86	23.72	24.0	17.74	17.85	17.69	18.0
EDGE (3 slots)	21.74	21.83	21.70	22.0	15.43	15.53	15.38	16.0
EDGE (4 slots)	20.47	20.52	20.36	21.0	14.09	14.21	14.06	14.5

GSM - Source-Based Time-Average Power (dBm)								
Band	GSM 850 (P3)			Tune-up power (dBm)	GSM 1900 (P3)			Tune-up power (dBm)
Channel	128	190	251		512	661	810	
Frequency (MHz)	824.2	836.6	848.8		1850.2	1880	1909.8	
GSM	21.75	21.62	21.63	22.0	13.74	13.89	13.87	14.0
GPRS (1 slot)	21.76	21.59	21.59	22.0	13.82	13.95	13.93	14.0
GPRS (2 slots)	23.81	22.65	23.63	24.0	15.73	15.87	15.84	16.0
GPRS (3 slots)	23.55	23.41	23.40	24.0	15.44	15.64	15.59	16.0
GPRS (4 slots)	23.74	23.60	23.57	24.0	15.73	15.96	15.90	16.0
EDGE (1 slot)	15.61	15.78	15.99	16.0	9.93	9.97	9.87	1.0
EDGE (2 slots)	17.80	17.86	17.72	18.0	11.74	11.85	11.69	12.0
EDGE (3 slots)	17.49	17.58	17.45	18.0	11.18	11.28	11.13	11.5
EDGE (4 slots)	17.47	17.52	17.36	18.0	11.09	11.21	11.06	11.5

Note: The source-based time-averaged power is linearly scaled the maximum burst averaged power based on time slots. The calculated method are shown as below:

Source based time-average power = Burst averaged power - Duty cycle factor in dB

Duty cycle factor = 9 dB for 1 Tx slot, 6 dB for 2 Tx slots, 4.25 dB for 3 Tx slots, 3 dB for 4 Tx slots

Remark:

1. For Head SAR testing, GSM should be evaluated, therefore the EUT was set in GSM for GSM850 and GSM1900 due to its highest source-based time-average power.
2. For Body SAR testing, GPRS should be evaluated, therefore the EUT was set in GPRS (4TX slots) for GSM850(Normal), GPRS (2TX slots) for GSM850(Hotspot), GPRS (4TX slots) for GSM1900(Normal), GPRS (2TX slots) for GSM1900(Sar sensor), GPRS (2TX slots) for GSM1900(Receiver ON), GPRS (4TX slots) for GSM1900(Hotspot), due to its highest source-based time-average power.
3. Per KDB 447498 D01 v06, the maximum output power channel is used for SAR testing and for further SAR

Waltek Testing Group (Shenzhen) Co., Ltd.

[Http://www.waltek.com.cn](http://www.waltek.com.cn)

test reduction.

4. The DUT do not support DTM function.

WCDMA - Average Power (dBm)								
Band	WCDMA Band II (P1)				WCDMA Band IV(P1)			
Channel	9262	9400	9538	Tune-up power (dBm)	1312	1412	1513	Tune-up power (dBm)
Frequency (MHz)	1852.4	1880.0	1907.6		1712.4	1732.4	1752.6	
RMC 12.2k	22.11	22.12	22.03	22.5	22.74	22.52	22.56	23.0
HSDPA Subtest-1	21.13	21.14	21.02	21.5	21.73	21.50	21.55	22.0
HSDPA Subtest-2	20.63	20.61	20.48	21.5	21.23	20.99	21.05	22.0
HSDPA Subtest-3	20.64	20.62	20.51	21.5	21.23	21.00	21.06	22.0
HSDPA Subtest-4	20.61	20.59	20.50	21.5	21.19	20.96	21.03	22.0
HSUPA Subtest-1	20.17	20.06	20.91	21.5	20.69	20.47	20.52	22.0
HSUPA Subtest-2	20.57	20.62	20.46	21.5	20.19	20.39	20.04	22.0
HSUPA Subtest-3	20.11	20.12	20.01	21.5	20.69	20.51	20.54	22.0
HSUPA Subtest-4	20.08	20.14	20.98	21.5	20.71	20.50	20.55	22.0
HSUPA Subtest-5	20.61	21.11	20.96	21.5	21.70	21.50	21.58	22.0

WCDMA - Average Power (dBm)								
Band	WCDMA Band II(P4)				WCDMA Band IV(P4)			
Channel	9262	9400	9538	Tune-up power (dBm)	1312	1412	1513	Tune-up power (dBm)
Frequency (MHz)	1852.4	1880.0	1907.6		1712.4	1732.4	1752.6	
RMC 12.2k	19.09	19.02	19.11	19.5	19.65	19.46	19.54	20.0
HSDPA Subtest-1	18.12	18.09	18.05	18.5	18.05	18.16	18.05	19.0
HSDPA Subtest-2	17.56	17.53	17.39	18.5	17.54	17.53	17.39	19.0
HSDPA Subtest-3	17.35	17.54	17.44	18.5	17.36	17.57	17.46	19.0
HSDPA Subtest-4	17.47	17.63	17.46	18.5	17.54	17.53	17.48	19.0
HSUPA Subtest-1	17.20	17.15	17.87	18.5	17.82	17.57	17.63	19.0
HSUPA Subtest-2	17.43	17.57	17.36	18.5	17.33	17.10	17.18	19.0
HSUPA Subtest-3	17.08	17.06	17.15	18.5	17.68	17.63	17.50	19.0
HSUPA Subtest-4	17.12	17.11	17.87	18.5	17.86	17.62	17.67	19.0
HSUPA Subtest-5	17.56	18.09	17.84	18.5	18.70	18.45	18.52	19.0

WCDMA - Average Power (dBm)								
Band	WCDMA Band II (P2)				WCDMA Band IV(P2)			
Channel	9262	9400	9538	Tune-up power (dBm)	1312	1412	1513	Tune-up power (dBm)
Frequency (MHz)	1852.4	1880.0	1907.6		1712.4	1732.4	1752.6	
RMC 12.2k	13.08	13.11	13.02	13.5	14.73	14.50	14.53	15.0
HSDPA Subtest-1	12.08	12.10	11.99	12.5	13.70	13.49	13.54	14.0
HSDPA Subtest-2	11.55	11.58	11.49	12.5	13.17	12.95	13.00	14.0
HSDPA Subtest-3	11.59	11.65	11.51	12.5	13.23	13.00	13.04	14.0
HSDPA Subtest-4	11.54	11.60	11.52	12.5	13.19	12.96	13.03	14.0
HSUPA Subtest-1	10.10	10.13	10.01	12.5	12.67	12.52	12.51	14.0
HSUPA Subtest-2	10.60	10.57	10.54	12.5	12.17	12.96	12.02	14.0
HSUPA Subtest-3	11.03	11.09	10.96	12.5	12.69	12.50	12.53	14.0
HSUPA Subtest-4	10.11	10.16	10.07	12.5	12.69	12.57	12.53	14.0
HSUPA Subtest-5	12.05	12.08	11.99	12.5	13.71	13.48	13.54	14.0

WCDMA - Average Power (dBm)								
Band	WCDMA Band II (P3)				WCDMA Band IV(P3)			
Channel	9262	9400	9538	Tune-up power (dBm)	1312	1412	1513	Tune-up power (dBm)
Frequency (MHz)	1852.4	1880.0	1907.6		1712.4	1732.4	1752.6	
RMC 12.2k	18.10	18.12	18.00	18.5	18.69	18.45	18.51	19.0
HSDPA Subtest-1	17.08	17.14	17.01	17.5	17.67	17.62	17.50	18.0
HSDPA Subtest-2	16.72	16.58	16.65	17.5	17.44	17.23	17.23	18.0
HSDPA Subtest-3	16.76	16.61	16.67	17.5	17.38	17.14	17.19	18.0
HSDPA Subtest-4	16.73	16.57	16.68	17.5	17.35	17.10	17.17	18.0
HSUPA Subtest-1	16.20	16.24	16.11	17.5	16.72	16.53	16.46	18.0
HSUPA Subtest-2	16.72	16.76	16.34	17.5	16.23	16.43	16.36	18.0
HSUPA Subtest-3	16.24	16.27	16.16	17.5	16.56	16.54	16.42	18.0
HSUPA Subtest-4	16.22	16.27	16.16	17.5	16.68	16.51	16.56	18.0
HSUPA Subtest-5	17.04	17.11	16.76	17.5	17.75	17.53	17.47	18.0

WCDMA - Average Power (dBm)								
Band	WCDMA Band V(P1)				WCDMA Band V(P3)			
Channel	4132	4183	4233	Tune-up power (dBm)	4132	4183	4233	Tune-up power (dBm)
Frequency (MHz)	826.4	836.6	846.6		826.4	836.6	846.6	
RMC 12.2k	22.82	22.73	22.83	23.0	20.79	20.72	20.77	21.0
HSDPA Subtest-1	21.83	21.75	21.83	22.0	19.78	19.73	19.74	20.0
HSDPA Subtest-2	21.30	21.23	21.30	22.0	19.27	19.21	19.24	20.0
HSDPA Subtest-3	21.34	21.27	21.33	22.0	19.32	19.26	19.31	20.0
HSDPA Subtest-4	21.30	21.23	21.29	22.0	19.27	19.21	19.25	20.0
HSUPA Subtest-1	20.78	20.70	20.77	22.0	18.73	18.65	15.72	20.0
HSUPA Subtest-2	20.29	20.20	20.27	22.0	18.23	18.17	18.23	20.0
HSUPA Subtest-3	20.82	20.71	20.80	22.0	18.75	18.69	18.74	20.0
HSUPA Subtest-4	20.81	20.74	20.81	22.0	18.77	15.68	15.74	20.0
HSUPA Subtest-5	21.79	21.75	21.83	22.0	19.78	19.71	19.74	20.0

Remark:

- per KDB 941225 D01 v03, The 12.2kbps RMC mode was selected for SAR testing(the primary mode).
- When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq 1/4$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode

LTE(P1)

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Verdict
Band2	1.4MHz	QPSK	18607	1RB#0	21.12	PASS
Band2	1.4MHz	QPSK	18607	1RB#2	21.04	PASS
Band2	1.4MHz	QPSK	18607	1RB#5	21.06	PASS
Band2	1.4MHz	QPSK	18607	3RB#0	21.18	PASS
Band2	1.4MHz	QPSK	18607	3RB#1	21.18	PASS
Band2	1.4MHz	QPSK	18607	3RB#3	21.19	PASS
Band2	1.4MHz	QPSK	18607	6RB#0	21.14	PASS
Band2	1.4MHz	QPSK	18900	1RB#0	21.15	PASS
Band2	1.4MHz	QPSK	18900	1RB#2	21.11	PASS
Band2	1.4MHz	QPSK	18900	1RB#5	21.16	PASS
Band2	1.4MHz	QPSK	18900	3RB#0	21.21	PASS
Band2	1.4MHz	QPSK	18900	3RB#1	21.19	PASS
Band2	1.4MHz	QPSK	18900	3RB#3	21.17	PASS
Band2	1.4MHz	QPSK	18900	6RB#0	21.21	PASS
Band2	1.4MHz	QPSK	19193	1RB#0	21.66	PASS
Band2	1.4MHz	QPSK	19193	1RB#2	21.63	PASS
Band2	1.4MHz	QPSK	19193	1RB#5	21.62	PASS
Band2	1.4MHz	QPSK	19193	3RB#0	21.73	PASS
Band2	1.4MHz	QPSK	19193	3RB#1	21.72	PASS
Band2	1.4MHz	QPSK	19193	3RB#3	21.73	PASS
Band2	1.4MHz	QPSK	19193	6RB#0	21.77	PASS
Band2	1.4MHz	16QAM	18607	1RB#0	21.35	PASS
Band2	1.4MHz	16QAM	18607	1RB#2	21.36	PASS
Band2	1.4MHz	16QAM	18607	1RB#5	21.28	PASS
Band2	1.4MHz	16QAM	18607	3RB#0	21.07	PASS
Band2	1.4MHz	16QAM	18607	3RB#1	21.10	PASS
Band2	1.4MHz	16QAM	18607	3RB#3	21.03	PASS
Band2	1.4MHz	16QAM	18607	6RB#0	21.00	PASS
Band2	1.4MHz	16QAM	18900	1RB#0	21.28	PASS
Band2	1.4MHz	16QAM	18900	1RB#2	21.39	PASS
Band2	1.4MHz	16QAM	18900	1RB#5	21.28	PASS
Band2	1.4MHz	16QAM	18900	3RB#0	21.13	PASS
Band2	1.4MHz	16QAM	18900	3RB#1	21.11	PASS
Band2	1.4MHz	16QAM	18900	3RB#3	21.08	PASS

Band2	1.4MHz	16QAM	18900	6RB#0	21.24	PASS
Band2	1.4MHz	16QAM	19193	1RB#0	21.76	PASS
Band2	1.4MHz	16QAM	19193	1RB#2	21.83	PASS
Band2	1.4MHz	16QAM	19193	1RB#5	21.80	PASS
Band2	1.4MHz	16QAM	19193	3RB#0	21.66	PASS
Band2	1.4MHz	16QAM	19193	3RB#1	21.67	PASS
Band2	1.4MHz	16QAM	19193	3RB#3	21.68	PASS
Band2	1.4MHz	16QAM	19193	6RB#0	21.83	PASS
Band2	3MHz	QPSK	18615	1RB#0	21.15	PASS
Band2	3MHz	QPSK	18615	1RB#8	21.11	PASS
Band2	3MHz	QPSK	18615	1RB#14	21.11	PASS
Band2	3MHz	QPSK	18615	8RB#0	21.08	PASS
Band2	3MHz	QPSK	18615	8RB#4	21.07	PASS
Band2	3MHz	QPSK	18615	8RB#7	21.06	PASS
Band2	3MHz	QPSK	18615	15RB#0	21.11	PASS
Band2	3MHz	QPSK	18900	1RB#0	21.26	PASS
Band2	3MHz	QPSK	18900	1RB#8	21.26	PASS
Band2	3MHz	QPSK	18900	1RB#14	21.28	PASS
Band2	3MHz	QPSK	18900	8RB#0	21.20	PASS
Band2	3MHz	QPSK	18900	8RB#4	21.16	PASS
Band2	3MHz	QPSK	18900	8RB#7	21.19	PASS
Band2	3MHz	QPSK	18900	15RB#0	21.22	PASS
Band2	3MHz	QPSK	19185	1RB#0	21.75	PASS
Band2	3MHz	QPSK	19185	1RB#8	21.78	PASS
Band2	3MHz	QPSK	19185	1RB#14	21.84	PASS
Band2	3MHz	QPSK	19185	8RB#0	21.69	PASS
Band2	3MHz	QPSK	19185	8RB#4	21.98	PASS
Band2	3MHz	QPSK	19185	8RB#7	21.76	PASS
Band2	3MHz	QPSK	19185	15RB#0	21.73	PASS
Band2	3MHz	16QAM	18615	1RB#0	21.34	PASS
Band2	3MHz	16QAM	18615	1RB#8	22.25	PASS
Band2	3MHz	16QAM	18615	1RB#14	21.29	PASS
Band2	3MHz	16QAM	18615	8RB#0	21.16	PASS
Band2	3MHz	16QAM	18615	8RB#4	21.16	PASS
Band2	3MHz	16QAM	18615	8RB#7	21.13	PASS
Band2	3MHz	16QAM	18615	15RB#0	21.11	PASS
Band2	3MHz	16QAM	18900	1RB#0	21.44	PASS

Band2	3MHz	16QAM	18900	1RB#8	21.41	PASS
Band2	3MHz	16QAM	18900	1RB#14	21.40	PASS
Band2	3MHz	16QAM	18900	8RB#0	21.24	PASS
Band2	3MHz	16QAM	18900	8RB#4	21.23	PASS
Band2	3MHz	16QAM	18900	8RB#7	21.26	PASS
Band2	3MHz	16QAM	18900	15RB#0	21.24	PASS
Band2	3MHz	16QAM	19185	1RB#0	21.71	PASS
Band2	3MHz	16QAM	19185	1RB#8	21.73	PASS
Band2	3MHz	16QAM	19185	1RB#14	21.01	PASS
Band2	3MHz	16QAM	19185	8RB#0	21.78	PASS
Band2	3MHz	16QAM	19185	8RB#4	21.81	PASS
Band2	3MHz	16QAM	19185	8RB#7	21.83	PASS
Band2	3MHz	16QAM	19185	15RB#0	21.76	PASS
Band2	5MHz	QPSK	18625	1RB#0	21.28	PASS
Band2	5MHz	QPSK	18625	1RB#12	21.18	PASS
Band2	5MHz	QPSK	18625	1RB#24	21.13	PASS
Band2	5MHz	QPSK	18625	12RB#0	21.21	PASS
Band2	5MHz	QPSK	18625	12RB#6	21.18	PASS
Band2	5MHz	QPSK	18625	12RB#13	21.08	PASS
Band2	5MHz	QPSK	18625	25RB#0	21.10	PASS
Band2	5MHz	QPSK	18900	1RB#0	21.39	PASS
Band2	5MHz	QPSK	18900	1RB#12	21.40	PASS
Band2	5MHz	QPSK	18900	1RB#24	21.40	PASS
Band2	5MHz	QPSK	18900	12RB#0	21.33	PASS
Band2	5MHz	QPSK	18900	12RB#6	21.33	PASS
Band2	5MHz	QPSK	18900	12RB#13	21.31	PASS
Band2	5MHz	QPSK	18900	25RB#0	21.36	PASS
Band2	5MHz	QPSK	19175	1RB#0	21.79	PASS
Band2	5MHz	QPSK	19175	1RB#12	21.88	PASS
Band2	5MHz	QPSK	19175	1RB#24	21.96	PASS
Band2	5MHz	QPSK	19175	12RB#0	21.81	PASS
Band2	5MHz	QPSK	19175	12RB#6	21.74	PASS
Band2	5MHz	QPSK	19175	12RB#13	21.80	PASS
Band2	5MHz	QPSK	19175	25RB#0	21.80	PASS
Band2	5MHz	16QAM	18625	1RB#0	21.26	PASS
Band2	5MHz	16QAM	18625	1RB#12	21.15	PASS
Band2	5MHz	16QAM	18625	1RB#24	21.07	PASS

Band2	5MHz	16QAM	18625	12RB#0	21.17	PASS
Band2	5MHz	16QAM	18625	12RB#6	21.17	PASS
Band2	5MHz	16QAM	18625	12RB#13	21.05	PASS
Band2	5MHz	16QAM	18625	25RB#0	21.16	PASS
Band2	5MHz	16QAM	18900	1RB#0	21.36	PASS
Band2	5MHz	16QAM	18900	1RB#12	21.33	PASS
Band2	5MHz	16QAM	18900	1RB#24	21.37	PASS
Band2	5MHz	16QAM	18900	12RB#0	21.35	PASS
Band2	5MHz	16QAM	18900	12RB#6	21.34	PASS
Band2	5MHz	16QAM	18900	12RB#13	21.27	PASS
Band2	5MHz	16QAM	18900	25RB#0	21.35	PASS
Band2	5MHz	16QAM	19175	1RB#0	21.80	PASS
Band2	5MHz	16QAM	19175	1RB#12	21.85	PASS
Band2	5MHz	16QAM	19175	1RB#24	21.88	PASS
Band2	5MHz	16QAM	19175	12RB#0	21.77	PASS
Band2	5MHz	16QAM	19175	12RB#6	21.78	PASS
Band2	5MHz	16QAM	19175	12RB#13	21.81	PASS
Band2	5MHz	16QAM	19175	25RB#0	21.85	PASS
Band2	10MHz	QPSK	18650	1RB#0	21.20	PASS
Band2	10MHz	QPSK	18650	1RB#24	21.03	PASS
Band2	10MHz	QPSK	18650	1RB#49	21.24	PASS
Band2	10MHz	QPSK	18650	25RB#0	21.10	PASS
Band2	10MHz	QPSK	18650	25RB#12	21.14	PASS
Band2	10MHz	QPSK	18650	25RB#25	21.07	PASS
Band2	10MHz	QPSK	18650	50RB#0	21.11	PASS
Band2	10MHz	QPSK	18900	1RB#0	21.25	PASS
Band2	10MHz	QPSK	18900	1RB#24	21.34	PASS
Band2	10MHz	QPSK	18900	1RB#49	21.28	PASS
Band2	10MHz	QPSK	18900	25RB#0	21.37	PASS
Band2	10MHz	QPSK	18900	25RB#12	21.33	PASS
Band2	10MHz	QPSK	18900	25RB#25	21.34	PASS
Band2	10MHz	QPSK	18900	50RB#0	21.33	PASS
Band2	10MHz	QPSK	19150	1RB#0	21.51	PASS
Band2	10MHz	QPSK	19150	1RB#24	21.69	PASS
Band2	10MHz	QPSK	19150	1RB#49	21.79	PASS
Band2	10MHz	QPSK	19150	25RB#0	21.73	PASS
Band2	10MHz	QPSK	19150	25RB#12	21.70	PASS

Band2	10MHz	QPSK	19150	25RB#25	21.79	PASS
Band2	10MHz	QPSK	19150	50RB#0	21.77	PASS
Band2	10MHz	16QAM	18650	1RB#0	21.39	PASS
Band2	10MHz	16QAM	18650	1RB#24	21.22	PASS
Band2	10MHz	16QAM	18650	1RB#49	21.12	PASS
Band2	10MHz	16QAM	18650	25RB#0	21.11	PASS
Band2	10MHz	16QAM	18650	25RB#12	21.13	PASS
Band2	10MHz	16QAM	18650	25RB#25	21.08	PASS
Band2	10MHz	16QAM	18650	50RB#0	21.10	PASS
Band2	10MHz	16QAM	18900	1RB#0	21.44	PASS
Band2	10MHz	16QAM	18900	1RB#24	21.48	PASS
Band2	10MHz	16QAM	18900	1RB#49	21.50	PASS
Band2	10MHz	16QAM	18900	25RB#0	21.34	PASS
Band2	10MHz	16QAM	18900	25RB#12	21.34	PASS
Band2	10MHz	16QAM	18900	25RB#25	21.37	PASS
Band2	10MHz	16QAM	18900	50RB#0	21.31	PASS
Band2	10MHz	16QAM	19150	1RB#0	21.69	PASS
Band2	10MHz	16QAM	19150	1RB#24	21.89	PASS
Band2	10MHz	16QAM	19150	1RB#49	22.05	PASS
Band2	10MHz	16QAM	19150	25RB#0	21.74	PASS
Band2	10MHz	16QAM	19150	25RB#12	21.70	PASS
Band2	10MHz	16QAM	19150	25RB#25	21.78	PASS
Band2	10MHz	16QAM	19150	50RB#0	21.75	PASS
Band2	15MHz	QPSK	18675	1RB#0	21.17	PASS
Band2	15MHz	QPSK	18675	1RB#38	21.18	PASS
Band2	15MHz	QPSK	18675	1RB#74	21.08	PASS
Band2	15MHz	QPSK	18675	38RB#0	21.00	PASS
Band2	15MHz	QPSK	18675	38RB#18	21.09	PASS
Band2	15MHz	QPSK	18675	38RB#37	21.00	PASS
Band2	15MHz	QPSK	18675	75RB#0	21.01	PASS
Band2	15MHz	QPSK	18900	1RB#0	21.20	PASS
Band2	15MHz	QPSK	18900	1RB#38	21.29	PASS
Band2	15MHz	QPSK	18900	1RB#74	21.22	PASS
Band2	15MHz	QPSK	18900	38RB#0	21.31	PASS
Band2	15MHz	QPSK	18900	38RB#18	21.31	PASS
Band2	15MHz	QPSK	18900	38RB#37	21.31	PASS
Band2	15MHz	QPSK	18900	75RB#0	21.32	PASS

Band2	15MHz	QPSK	19125	1RB#0	21.32	PASS
Band2	15MHz	QPSK	19125	1RB#38	21.61	PASS
Band2	15MHz	QPSK	19125	1RB#74	21.76	PASS
Band2	15MHz	QPSK	19125	38RB#0	21.60	PASS
Band2	15MHz	QPSK	19125	38RB#18	21.60	PASS
Band2	15MHz	QPSK	19125	38RB#37	21.61	PASS
Band2	15MHz	QPSK	19125	75RB#0	21.61	PASS
Band2	15MHz	16QAM	18675	1RB#0	21.35	PASS
Band2	15MHz	16QAM	18675	1RB#38	21.17	PASS
Band2	15MHz	16QAM	18675	1RB#74	21.00	PASS
Band2	15MHz	16QAM	18675	38RB#0	21.00	PASS
Band2	15MHz	16QAM	18675	38RB#18	21.00	PASS
Band2	15MHz	16QAM	18675	38RB#37	21.01	PASS
Band2	15MHz	16QAM	18675	75RB#0	21.12	PASS
Band2	15MHz	16QAM	18900	1RB#0	21.39	PASS
Band2	15MHz	16QAM	18900	1RB#38	21.54	PASS
Band2	15MHz	16QAM	18900	1RB#74	21.42	PASS
Band2	15MHz	16QAM	18900	38RB#0	21.31	PASS
Band2	15MHz	16QAM	18900	38RB#18	21.31	PASS
Band2	15MHz	16QAM	18900	38RB#37	21.31	PASS
Band2	15MHz	16QAM	18900	75RB#0	21.31	PASS
Band2	15MHz	16QAM	19125	1RB#0	21.49	PASS
Band2	15MHz	16QAM	19125	1RB#38	21.79	PASS
Band2	15MHz	16QAM	19125	1RB#74	21.95	PASS
Band2	15MHz	16QAM	19125	38RB#0	21.60	PASS
Band2	15MHz	16QAM	19125	38RB#18	21.60	PASS
Band2	15MHz	16QAM	19125	38RB#37	21.61	PASS
Band2	15MHz	16QAM	19125	75RB#0	21.55	PASS
Band2	20MHz	QPSK	18700	1RB#0	21.28	PASS
Band2	20MHz	QPSK	18700	1RB#49	21.08	PASS
Band2	20MHz	QPSK	18700	1RB#99	21.07	PASS
Band2	20MHz	QPSK	18700	50RB#0	21.07	PASS
Band2	20MHz	QPSK	18700	50RB#25	21.08	PASS
Band2	20MHz	QPSK	18700	50RB#50	21.13	PASS
Band2	20MHz	QPSK	18700	100RB#0	21.01	PASS
Band2	20MHz	QPSK	18900	1RB#0	22.19	PASS
Band2	20MHz	QPSK	18900	1RB#49	22.73	PASS

Band2	20MHz	QPSK	18900	1RB#99	21.28	PASS
Band2	20MHz	QPSK	18900	50RB#0	21.35	PASS
Band2	20MHz	QPSK	18900	50RB#25	21.36	PASS
Band2	20MHz	QPSK	18900	50RB#50	21.98	PASS
Band2	20MHz	QPSK	18900	100RB#0	21.70	PASS
Band2	20MHz	QPSK	19100	1RB#0	21.26	PASS
Band2	20MHz	QPSK	19100	1RB#49	21.61	PASS
Band2	20MHz	QPSK	19100	1RB#99	21.84	PASS
Band2	20MHz	QPSK	19100	50RB#0	21.40	PASS
Band2	20MHz	QPSK	19100	50RB#25	21.40	PASS
Band2	20MHz	QPSK	19100	50RB#50	21.49	PASS
Band2	20MHz	QPSK	19100	100RB#0	21.46	PASS
Band2	20MHz	16QAM	18700	1RB#0	21.28	PASS
Band2	20MHz	16QAM	18700	1RB#49	21.08	PASS
Band2	20MHz	16QAM	18700	1RB#99	21.01	PASS
Band2	20MHz	16QAM	18700	50RB#0	21.05	PASS
Band2	20MHz	16QAM	18700	50RB#25	21.05	PASS
Band2	20MHz	16QAM	18700	50RB#50	21.12	PASS
Band2	20MHz	16QAM	18700	100RB#0	21.00	PASS
Band2	20MHz	16QAM	18900	1RB#0	21.41	PASS
Band2	20MHz	16QAM	18900	1RB#49	21.61	PASS
Band2	20MHz	16QAM	18900	1RB#99	21.49	PASS
Band2	20MHz	16QAM	18900	50RB#0	21.37	PASS
Band2	20MHz	16QAM	18900	50RB#25	21.36	PASS
Band2	20MHz	16QAM	18900	50RB#50	21.29	PASS
Band2	20MHz	16QAM	18900	100RB#0	21.30	PASS
Band2	20MHz	16QAM	19100	1RB#0	21.26	PASS
Band2	20MHz	16QAM	19100	1RB#49	21.60	PASS
Band2	20MHz	16QAM	19100	1RB#99	21.84	PASS
Band2	20MHz	16QAM	19100	50RB#0	21.36	PASS
Band2	20MHz	16QAM	19100	50RB#25	21.36	PASS
Band2	20MHz	16QAM	19100	50RB#50	21.50	PASS
Band2	20MHz	16QAM	19100	100RB#0	21.43	PASS

LTE(P4): Sensor ON

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Verdict
Band2	1.4MHz	QPSK	18607	1RB#0	18.36	PASS
Band2	1.4MHz	QPSK	18607	1RB#2	18.36	PASS
Band2	1.4MHz	QPSK	18607	1RB#5	18.32	PASS
Band2	1.4MHz	QPSK	18607	3RB#0	18.40	PASS
Band2	1.4MHz	QPSK	18607	3RB#1	18.36	PASS
Band2	1.4MHz	QPSK	18607	3RB#3	18.33	PASS
Band2	1.4MHz	QPSK	18607	6RB#0	18.40	PASS
Band2	1.4MHz	QPSK	18900	1RB#0	18.49	PASS
Band2	1.4MHz	QPSK	18900	1RB#2	18.41	PASS
Band2	1.4MHz	QPSK	18900	1RB#5	18.46	PASS
Band2	1.4MHz	QPSK	18900	3RB#0	18.40	PASS
Band2	1.4MHz	QPSK	18900	3RB#1	18.41	PASS
Band2	1.4MHz	QPSK	18900	3RB#3	18.44	PASS
Band2	1.4MHz	QPSK	18900	6RB#0	18.43	PASS
Band2	1.4MHz	QPSK	19193	1RB#0	18.47	PASS
Band2	1.4MHz	QPSK	19193	1RB#2	18.46	PASS
Band2	1.4MHz	QPSK	19193	1RB#5	18.49	PASS
Band2	1.4MHz	QPSK	19193	3RB#0	18.49	PASS
Band2	1.4MHz	QPSK	19193	3RB#1	18.47	PASS
Band2	1.4MHz	QPSK	19193	3RB#3	18.49	PASS
Band2	1.4MHz	QPSK	19193	6RB#0	18.51	PASS
Band2	1.4MHz	16QAM	18607	1RB#0	18.58	PASS
Band2	1.4MHz	16QAM	18607	1RB#2	18.55	PASS
Band2	1.4MHz	16QAM	18607	1RB#5	18.52	PASS
Band2	1.4MHz	16QAM	18607	3RB#0	18.26	PASS
Band2	1.4MHz	16QAM	18607	3RB#1	18.25	PASS
Band2	1.4MHz	16QAM	18607	3RB#3	18.21	PASS
Band2	1.4MHz	16QAM	18607	6RB#0	18.41	PASS
Band2	1.4MHz	16QAM	18900	1RB#0	18.62	PASS
Band2	1.4MHz	16QAM	18900	1RB#2	18.63	PASS
Band2	1.4MHz	16QAM	18900	1RB#5	18.63	PASS
Band2	1.4MHz	16QAM	18900	3RB#0	18.31	PASS
Band2	1.4MHz	16QAM	18900	3RB#1	18.31	PASS
Band2	1.4MHz	16QAM	18900	3RB#3	18.30	PASS

Band2	1.4MHz	16QAM	18900	6RB#0	18.32	PASS
Band2	1.4MHz	16QAM	19193	1RB#0	18.68	PASS
Band2	1.4MHz	16QAM	19193	1RB#2	18.71	PASS
Band2	1.4MHz	16QAM	19193	1RB#5	18.64	PASS
Band2	1.4MHz	16QAM	19193	3RB#0	18.43	PASS
Band2	1.4MHz	16QAM	19193	3RB#1	18.38	PASS
Band2	1.4MHz	16QAM	19193	3RB#3	18.35	PASS
Band2	1.4MHz	16QAM	19193	6RB#0	18.55	PASS
Band2	3MHz	QPSK	18615	1RB#0	18.33	PASS
Band2	3MHz	QPSK	18615	1RB#8	18.25	PASS
Band2	3MHz	QPSK	18615	1RB#14	18.24	PASS
Band2	3MHz	QPSK	18615	8RB#0	18.34	PASS
Band2	3MHz	QPSK	18615	8RB#4	18.32	PASS
Band2	3MHz	QPSK	18615	8RB#7	18.30	PASS
Band2	3MHz	QPSK	18615	15RB#0	18.29	PASS
Band2	3MHz	QPSK	18900	1RB#0	18.42	PASS
Band2	3MHz	QPSK	18900	1RB#8	18.41	PASS
Band2	3MHz	QPSK	18900	1RB#14	18.39	PASS
Band2	3MHz	QPSK	18900	8RB#0	18.40	PASS
Band2	3MHz	QPSK	18900	8RB#4	18.41	PASS
Band2	3MHz	QPSK	18900	8RB#7	18.41	PASS
Band2	3MHz	QPSK	18900	15RB#0	18.40	PASS
Band2	3MHz	QPSK	19185	1RB#0	18.45	PASS
Band2	3MHz	QPSK	19185	1RB#8	18.44	PASS
Band2	3MHz	QPSK	19185	1RB#14	18.41	PASS
Band2	3MHz	QPSK	19185	8RB#0	18.46	PASS
Band2	3MHz	QPSK	19185	8RB#4	18.46	PASS
Band2	3MHz	QPSK	19185	8RB#7	18.45	PASS
Band2	3MHz	QPSK	19185	15RB#0	18.47	PASS
Band2	3MHz	16QAM	18615	1RB#0	18.50	PASS
Band2	3MHz	16QAM	18615	1RB#8	18.41	PASS
Band2	3MHz	16QAM	18615	1RB#14	18.37	PASS
Band2	3MHz	16QAM	18615	8RB#0	18.38	PASS
Band2	3MHz	16QAM	18615	8RB#4	18.43	PASS
Band2	3MHz	16QAM	18615	8RB#7	18.34	PASS
Band2	3MHz	16QAM	18615	15RB#0	18.35	PASS
Band2	3MHz	16QAM	18900	1RB#0	18.58	PASS

Band2	3MHz	16QAM	18900	1RB#8	18.57	PASS
Band2	3MHz	16QAM	18900	1RB#14	18.59	PASS
Band2	3MHz	16QAM	18900	8RB#0	18.50	PASS
Band2	3MHz	16QAM	18900	8RB#4	18.48	PASS
Band2	3MHz	16QAM	18900	8RB#7	18.47	PASS
Band2	3MHz	16QAM	18900	15RB#0	18.41	PASS
Band2	3MHz	16QAM	19185	1RB#0	18.62	PASS
Band2	3MHz	16QAM	19185	1RB#8	18.57	PASS
Band2	3MHz	16QAM	19185	1RB#14	18.62	PASS
Band2	3MHz	16QAM	19185	8RB#0	18.54	PASS
Band2	3MHz	16QAM	19185	8RB#4	18.56	PASS
Band2	3MHz	16QAM	19185	8RB#7	18.54	PASS
Band2	3MHz	16QAM	19185	15RB#0	18.50	PASS
Band2	5MHz	QPSK	18625	1RB#0	18.46	PASS
Band2	5MHz	QPSK	18625	1RB#12	18.32	PASS
Band2	5MHz	QPSK	18625	1RB#24	18.33	PASS
Band2	5MHz	QPSK	18625	12RB#0	18.35	PASS
Band2	5MHz	QPSK	18625	12RB#6	18.31	PASS
Band2	5MHz	QPSK	18625	12RB#13	18.18	PASS
Band2	5MHz	QPSK	18625	25RB#0	18.27	PASS
Band2	5MHz	QPSK	18900	1RB#0	18.54	PASS
Band2	5MHz	QPSK	18900	1RB#12	18.55	PASS
Band2	5MHz	QPSK	18900	1RB#24	18.48	PASS
Band2	5MHz	QPSK	18900	12RB#0	18.48	PASS
Band2	5MHz	QPSK	18900	12RB#6	18.40	PASS
Band2	5MHz	QPSK	18900	12RB#13	18.33	PASS
Band2	5MHz	QPSK	18900	25RB#0	18.38	PASS
Band2	5MHz	QPSK	19175	1RB#0	18.60	PASS
Band2	5MHz	QPSK	19175	1RB#12	18.54	PASS
Band2	5MHz	QPSK	19175	1RB#24	18.57	PASS
Band2	5MHz	QPSK	19175	12RB#0	18.44	PASS
Band2	5MHz	QPSK	19175	12RB#6	18.52	PASS
Band2	5MHz	QPSK	19175	12RB#13	18.37	PASS
Band2	5MHz	QPSK	19175	25RB#0	18.47	PASS
Band2	5MHz	16QAM	18625	1RB#0	18.45	PASS
Band2	5MHz	16QAM	18625	1RB#12	18.32	PASS
Band2	5MHz	16QAM	18625	1RB#24	18.30	PASS

Band2	5MHz	16QAM	18625	12RB#0	18.32	PASS
Band2	5MHz	16QAM	18625	12RB#6	18.30	PASS
Band2	5MHz	16QAM	18625	12RB#13	18.22	PASS
Band2	5MHz	16QAM	18625	25RB#0	18.30	PASS
Band2	5MHz	16QAM	18900	1RB#0	18.52	PASS
Band2	5MHz	16QAM	18900	1RB#12	18.48	PASS
Band2	5MHz	16QAM	18900	1RB#24	18.46	PASS
Band2	5MHz	16QAM	18900	12RB#0	18.43	PASS
Band2	5MHz	16QAM	18900	12RB#6	18.45	PASS
Band2	5MHz	16QAM	18900	12RB#13	18.32	PASS
Band2	5MHz	16QAM	18900	25RB#0	18.41	PASS
Band2	5MHz	16QAM	19175	1RB#0	18.55	PASS
Band2	5MHz	16QAM	19175	1RB#12	18.48	PASS
Band2	5MHz	16QAM	19175	1RB#24	18.53	PASS
Band2	5MHz	16QAM	19175	12RB#0	18.45	PASS
Band2	5MHz	16QAM	19175	12RB#6	18.45	PASS
Band2	5MHz	16QAM	19175	12RB#13	18.40	PASS
Band2	5MHz	16QAM	19175	25RB#0	18.49	PASS
Band2	10MHz	QPSK	18650	1RB#0	18.35	PASS
Band2	10MHz	QPSK	18650	1RB#24	18.24	PASS
Band2	10MHz	QPSK	18650	1RB#49	18.13	PASS
Band2	10MHz	QPSK	18650	25RB#0	18.26	PASS
Band2	10MHz	QPSK	18650	25RB#12	18.25	PASS
Band2	10MHz	QPSK	18650	25RB#25	18.24	PASS
Band2	10MHz	QPSK	18650	50RB#0	18.26	PASS
Band2	10MHz	QPSK	18900	1RB#0	18.40	PASS
Band2	10MHz	QPSK	18900	1RB#24	18.49	PASS
Band2	10MHz	QPSK	18900	1RB#49	18.34	PASS
Band2	10MHz	QPSK	18900	25RB#0	18.47	PASS
Band2	10MHz	QPSK	18900	25RB#12	18.46	PASS
Band2	10MHz	QPSK	18900	25RB#25	18.36	PASS
Band2	10MHz	QPSK	18900	50RB#0	18.47	PASS
Band2	10MHz	QPSK	19150	1RB#0	18.34	PASS
Band2	10MHz	QPSK	19150	1RB#24	18.47	PASS
Band2	10MHz	QPSK	19150	1RB#49	18.45	PASS
Band2	10MHz	QPSK	19150	25RB#0	18.51	PASS
Band2	10MHz	QPSK	19150	25RB#12	18.48	PASS

Band2	10MHz	QPSK	19150	25RB#25	18.44	PASS
Band2	10MHz	QPSK	19150	50RB#0	18.53	PASS
Band2	10MHz	16QAM	18650	1RB#0	18.50	PASS
Band2	10MHz	16QAM	18650	1RB#24	18.40	PASS
Band2	10MHz	16QAM	18650	1RB#49	18.31	PASS
Band2	10MHz	16QAM	18650	25RB#0	18.29	PASS
Band2	10MHz	16QAM	18650	25RB#12	18.28	PASS
Band2	10MHz	16QAM	18650	25RB#25	18.23	PASS
Band2	10MHz	16QAM	18650	50RB#0	18.26	PASS
Band2	10MHz	16QAM	18900	1RB#0	18.55	PASS
Band2	10MHz	16QAM	18900	1RB#24	18.69	PASS
Band2	10MHz	16QAM	18900	1RB#49	18.54	PASS
Band2	10MHz	16QAM	18900	25RB#0	18.48	PASS
Band2	10MHz	16QAM	18900	25RB#12	18.50	PASS
Band2	10MHz	16QAM	18900	25RB#25	18.40	PASS
Band2	10MHz	16QAM	18900	50RB#0	18.43	PASS
Band2	10MHz	16QAM	19150	1RB#0	18.51	PASS
Band2	10MHz	16QAM	19150	1RB#24	18.65	PASS
Band2	10MHz	16QAM	19150	1RB#49	18.65	PASS
Band2	10MHz	16QAM	19150	25RB#0	18.50	PASS
Band2	10MHz	16QAM	19150	25RB#12	18.52	PASS
Band2	10MHz	16QAM	19150	25RB#25	18.47	PASS
Band2	10MHz	16QAM	19150	50RB#0	18.47	PASS
Band2	15MHz	QPSK	18675	1RB#0	18.33	PASS
Band2	15MHz	QPSK	18675	1RB#38	18.18	PASS
Band2	15MHz	QPSK	18675	1RB#74	18.06	PASS
Band2	15MHz	QPSK	18675	38RB#0	18.18	PASS
Band2	15MHz	QPSK	18675	38RB#18	18.23	PASS
Band2	15MHz	QPSK	18675	38RB#37	18.23	PASS
Band2	15MHz	QPSK	18675	75RB#0	18.24	PASS
Band2	15MHz	QPSK	18900	1RB#0	18.34	PASS
Band2	15MHz	QPSK	18900	1RB#38	18.43	PASS
Band2	15MHz	QPSK	18900	1RB#74	18.23	PASS
Band2	15MHz	QPSK	18900	38RB#0	18.42	PASS
Band2	15MHz	QPSK	18900	38RB#18	18.45	PASS
Band2	15MHz	QPSK	18900	38RB#37	18.44	PASS
Band2	15MHz	QPSK	18900	75RB#0	18.45	PASS

Band2	15MHz	QPSK	19125	1RB#0	18.20	PASS
Band2	15MHz	QPSK	19125	1RB#38	18.35	PASS
Band2	15MHz	QPSK	19125	1RB#74	18.37	PASS
Band2	15MHz	QPSK	19125	38RB#0	18.37	PASS
Band2	15MHz	QPSK	19125	38RB#18	18.41	PASS
Band2	15MHz	QPSK	19125	38RB#37	18.40	PASS
Band2	15MHz	QPSK	19125	75RB#0	18.41	PASS
Band2	15MHz	16QAM	18675	1RB#0	18.51	PASS
Band2	15MHz	16QAM	18675	1RB#38	18.38	PASS
Band2	15MHz	16QAM	18675	1RB#74	18.26	PASS
Band2	15MHz	16QAM	18675	38RB#0	18.20	PASS
Band2	15MHz	16QAM	18675	38RB#18	18.22	PASS
Band2	15MHz	16QAM	18675	38RB#37	18.23	PASS
Band2	15MHz	16QAM	18675	75RB#0	18.17	PASS
Band2	15MHz	16QAM	18900	1RB#0	18.55	PASS
Band2	15MHz	16QAM	18900	1RB#38	18.64	PASS
Band2	15MHz	16QAM	18900	1RB#74	18.44	PASS
Band2	15MHz	16QAM	18900	38RB#0	18.43	PASS
Band2	15MHz	16QAM	18900	38RB#18	18.44	PASS
Band2	15MHz	16QAM	18900	38RB#37	18.44	PASS
Band2	15MHz	16QAM	18900	75RB#0	18.42	PASS
Band2	15MHz	16QAM	19125	1RB#0	18.37	PASS
Band2	15MHz	16QAM	19125	1RB#38	18.58	PASS
Band2	15MHz	16QAM	19125	1RB#74	18.59	PASS
Band2	15MHz	16QAM	19125	38RB#0	18.39	PASS
Band2	15MHz	16QAM	19125	38RB#18	18.40	PASS
Band2	15MHz	16QAM	19125	38RB#37	18.42	PASS
Band2	15MHz	16QAM	19125	75RB#0	18.36	PASS
Band2	20MHz	QPSK	18700	1RB#0	18.46	PASS
Band2	20MHz	QPSK	18700	1RB#49	18.29	PASS
Band2	20MHz	QPSK	18700	1RB#99	18.28	PASS
Band2	20MHz	QPSK	18700	50RB#0	18.30	PASS
Band2	20MHz	QPSK	18700	50RB#25	18.35	PASS
Band2	20MHz	QPSK	18700	50RB#50	18.22	PASS
Band2	20MHz	QPSK	18700	100RB#0	18.27	PASS
Band2	20MHz	QPSK	18900	1RB#0	18.36	PASS
Band2	20MHz	QPSK	18900	1RB#49	18.51	PASS

Band2	20MHz	QPSK	18900	1RB#99	18.27	PASS
Band2	20MHz	QPSK	18900	50RB#0	18.49	PASS
Band2	20MHz	QPSK	18900	50RB#25	18.52	PASS
Band2	20MHz	QPSK	18900	50RB#50	18.32	PASS
Band2	20MHz	QPSK	18900	100RB#0	18.44	PASS
Band2	20MHz	QPSK	19100	1RB#0	18.29	PASS
Band2	20MHz	QPSK	19100	1RB#49	18.39	PASS
Band2	20MHz	QPSK	19100	1RB#99	18.47	PASS
Band2	20MHz	QPSK	19100	50RB#0	18.24	PASS
Band2	20MHz	QPSK	19100	50RB#25	18.27	PASS
Band2	20MHz	QPSK	19100	50RB#50	18.26	PASS
Band2	20MHz	QPSK	19100	100RB#0	18.30	PASS
Band2	20MHz	16QAM	18700	1RB#0	18.49	PASS
Band2	20MHz	16QAM	18700	1RB#49	18.35	PASS
Band2	20MHz	16QAM	18700	1RB#99	18.24	PASS
Band2	20MHz	16QAM	18700	50RB#0	18.31	PASS
Band2	20MHz	16QAM	18700	50RB#25	18.29	PASS
Band2	20MHz	16QAM	18700	50RB#50	18.17	PASS
Band2	20MHz	16QAM	18700	100RB#0	18.24	PASS
Band2	20MHz	16QAM	18900	1RB#0	18.54	PASS
Band2	20MHz	16QAM	18900	1RB#49	18.75	PASS
Band2	20MHz	16QAM	18900	1RB#99	18.50	PASS
Band2	20MHz	16QAM	18900	50RB#0	18.54	PASS
Band2	20MHz	16QAM	18900	50RB#25	18.47	PASS
Band2	20MHz	16QAM	18900	50RB#50	18.36	PASS
Band2	20MHz	16QAM	18900	100RB#0	18.41	PASS
Band2	20MHz	16QAM	19100	1RB#0	18.29	PASS
Band2	20MHz	16QAM	19100	1RB#49	18.39	PASS
Band2	20MHz	16QAM	19100	1RB#99	18.48	PASS
Band2	20MHz	16QAM	19100	50RB#0	18.24	PASS
Band2	20MHz	16QAM	19100	50RB#25	18.23	PASS
Band2	20MHz	16QAM	19100	50RB#50	18.22	PASS
Band2	20MHz	16QAM	19100	100RB#0	18.25	PASS

LTE(P2): Receiver ON

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Verdict
Band2	1.4MHz	QPSK	18607	1RB#0	12.01	PASS
Band2	1.4MHz	QPSK	18607	1RB#2	11.96	PASS
Band2	1.4MHz	QPSK	18607	1RB#5	11.99	PASS
Band2	1.4MHz	QPSK	18607	3RB#0	11.98	PASS
Band2	1.4MHz	QPSK	18607	3RB#1	11.97	PASS
Band2	1.4MHz	QPSK	18607	3RB#3	11.98	PASS
Band2	1.4MHz	QPSK	18607	6RB#0	12.01	PASS
Band2	1.4MHz	QPSK	18900	1RB#0	12.06	PASS
Band2	1.4MHz	QPSK	18900	1RB#2	12.09	PASS
Band2	1.4MHz	QPSK	18900	1RB#5	12.11	PASS
Band2	1.4MHz	QPSK	18900	3RB#0	12.05	PASS
Band2	1.4MHz	QPSK	18900	3RB#1	12.07	PASS
Band2	1.4MHz	QPSK	18900	3RB#3	12.03	PASS
Band2	1.4MHz	QPSK	18900	6RB#0	12.07	PASS
Band2	1.4MHz	QPSK	19193	1RB#0	12.15	PASS
Band2	1.4MHz	QPSK	19193	1RB#2	12.12	PASS
Band2	1.4MHz	QPSK	19193	1RB#5	12.11	PASS
Band2	1.4MHz	QPSK	19193	3RB#0	12.15	PASS
Band2	1.4MHz	QPSK	19193	3RB#1	12.12	PASS
Band2	1.4MHz	QPSK	19193	3RB#3	12.14	PASS
Band2	1.4MHz	QPSK	19193	6RB#0	12.16	PASS
Band2	1.4MHz	16QAM	18607	1RB#0	12.14	PASS
Band2	1.4MHz	16QAM	18607	1RB#2	12.15	PASS
Band2	1.4MHz	16QAM	18607	1RB#5	12.09	PASS
Band2	1.4MHz	16QAM	18607	3RB#0	11.91	PASS
Band2	1.4MHz	16QAM	18607	3RB#1	11.88	PASS
Band2	1.4MHz	16QAM	18607	3RB#3	11.88	PASS
Band2	1.4MHz	16QAM	18607	6RB#0	12.02	PASS
Band2	1.4MHz	16QAM	18900	1RB#0	12.22	PASS
Band2	1.4MHz	16QAM	18900	1RB#2	12.26	PASS
Band2	1.4MHz	16QAM	18900	1RB#5	12.20	PASS
Band2	1.4MHz	16QAM	18900	3RB#0	11.95	PASS
Band2	1.4MHz	16QAM	18900	3RB#1	11.96	PASS
Band2	1.4MHz	16QAM	18900	3RB#3	11.90	PASS

Band2	1.4MHz	16QAM	18900	6RB#0	12.12	PASS
Band2	1.4MHz	16QAM	19193	1RB#0	12.25	PASS
Band2	1.4MHz	16QAM	19193	1RB#2	12.28	PASS
Band2	1.4MHz	16QAM	19193	1RB#5	12.25	PASS
Band2	1.4MHz	16QAM	19193	3RB#0	12.05	PASS
Band2	1.4MHz	16QAM	19193	3RB#1	12.04	PASS
Band2	1.4MHz	16QAM	19193	3RB#3	12.01	PASS
Band2	1.4MHz	16QAM	19193	6RB#0	12.16	PASS
Band2	3MHz	QPSK	18615	1RB#0	12.03	PASS
Band2	3MHz	QPSK	18615	1RB#8	11.97	PASS
Band2	3MHz	QPSK	18615	1RB#14	11.90	PASS
Band2	3MHz	QPSK	18615	8RB#0	12.02	PASS
Band2	3MHz	QPSK	18615	8RB#4	12.01	PASS
Band2	3MHz	QPSK	18615	8RB#7	11.93	PASS
Band2	3MHz	QPSK	18615	15RB#0	11.93	PASS
Band2	3MHz	QPSK	18900	1RB#0	12.05	PASS
Band2	3MHz	QPSK	18900	1RB#8	12.08	PASS
Band2	3MHz	QPSK	18900	1RB#14	12.03	PASS
Band2	3MHz	QPSK	18900	8RB#0	12.05	PASS
Band2	3MHz	QPSK	18900	8RB#4	12.04	PASS
Band2	3MHz	QPSK	18900	8RB#7	12.05	PASS
Band2	3MHz	QPSK	18900	15RB#0	12.06	PASS
Band2	3MHz	QPSK	19185	1RB#0	12.08	PASS
Band2	3MHz	QPSK	19185	1RB#8	12.09	PASS
Band2	3MHz	QPSK	19185	1RB#14	12.11	PASS
Band2	3MHz	QPSK	19185	8RB#0	12.14	PASS
Band2	3MHz	QPSK	19185	8RB#4	12.14	PASS
Band2	3MHz	QPSK	19185	8RB#7	12.09	PASS
Band2	3MHz	QPSK	19185	15RB#0	12.11	PASS
Band2	3MHz	16QAM	18615	1RB#0	12.14	PASS
Band2	3MHz	16QAM	18615	1RB#8	12.12	PASS
Band2	3MHz	16QAM	18615	1RB#14	12.07	PASS
Band2	3MHz	16QAM	18615	8RB#0	12.07	PASS
Band2	3MHz	16QAM	18615	8RB#4	12.08	PASS
Band2	3MHz	16QAM	18615	8RB#7	12.03	PASS
Band2	3MHz	16QAM	18615	15RB#0	12.00	PASS
Band2	3MHz	16QAM	18900	1RB#0	12.20	PASS

Band2	3MHz	16QAM	18900	1RB#8	12.21	PASS
Band2	3MHz	16QAM	18900	1RB#14	12.20	PASS
Band2	3MHz	16QAM	18900	8RB#0	12.14	PASS
Band2	3MHz	16QAM	18900	8RB#4	12.13	PASS
Band2	3MHz	16QAM	18900	8RB#7	12.10	PASS
Band2	3MHz	16QAM	18900	15RB#0	12.07	PASS
Band2	3MHz	16QAM	19185	1RB#0	12.28	PASS
Band2	3MHz	16QAM	19185	1RB#8	12.29	PASS
Band2	3MHz	16QAM	19185	1RB#14	12.28	PASS
Band2	3MHz	16QAM	19185	8RB#0	12.21	PASS
Band2	3MHz	16QAM	19185	8RB#4	12.21	PASS
Band2	3MHz	16QAM	19185	8RB#7	12.22	PASS
Band2	3MHz	16QAM	19185	15RB#0	12.14	PASS
Band2	5MHz	QPSK	18625	1RB#0	12.12	PASS
Band2	5MHz	QPSK	18625	1RB#12	12.01	PASS
Band2	5MHz	QPSK	18625	1RB#24	11.97	PASS
Band2	5MHz	QPSK	18625	12RB#0	12.03	PASS
Band2	5MHz	QPSK	18625	12RB#6	11.96	PASS
Band2	5MHz	QPSK	18625	12RB#13	11.93	PASS
Band2	5MHz	QPSK	18625	25RB#0	11.94	PASS
Band2	5MHz	QPSK	18900	1RB#0	12.17	PASS
Band2	5MHz	QPSK	18900	1RB#12	12.13	PASS
Band2	5MHz	QPSK	18900	1RB#24	12.10	PASS
Band2	5MHz	QPSK	18900	12RB#0	12.08	PASS
Band2	5MHz	QPSK	18900	12RB#6	12.06	PASS
Band2	5MHz	QPSK	18900	12RB#13	12.02	PASS
Band2	5MHz	QPSK	18900	25RB#0	12.04	PASS
Band2	5MHz	QPSK	19175	1RB#0	12.27	PASS
Band2	5MHz	QPSK	19175	1RB#12	12.23	PASS
Band2	5MHz	QPSK	19175	1RB#24	12.22	PASS
Band2	5MHz	QPSK	19175	12RB#0	12.18	PASS
Band2	5MHz	QPSK	19175	12RB#6	12.15	PASS
Band2	5MHz	QPSK	19175	12RB#13	12.16	PASS
Band2	5MHz	QPSK	19175	25RB#0	12.19	PASS
Band2	5MHz	16QAM	18625	1RB#0	12.12	PASS
Band2	5MHz	16QAM	18625	1RB#12	11.98	PASS
Band2	5MHz	16QAM	18625	1RB#24	11.97	PASS

Band2	5MHz	16QAM	18625	12RB#0	11.97	PASS
Band2	5MHz	16QAM	18625	12RB#6	12.01	PASS
Band2	5MHz	16QAM	18625	12RB#13	11.92	PASS
Band2	5MHz	16QAM	18625	25RB#0	11.99	PASS
Band2	5MHz	16QAM	18900	1RB#0	12.16	PASS
Band2	5MHz	16QAM	18900	1RB#12	12.14	PASS
Band2	5MHz	16QAM	18900	1RB#24	12.11	PASS
Band2	5MHz	16QAM	18900	12RB#0	12.09	PASS
Band2	5MHz	16QAM	18900	12RB#6	12.06	PASS
Band2	5MHz	16QAM	18900	12RB#13	11.99	PASS
Band2	5MHz	16QAM	18900	25RB#0	12.07	PASS
Band2	5MHz	16QAM	19175	1RB#0	12.25	PASS
Band2	5MHz	16QAM	19175	1RB#12	12.17	PASS
Band2	5MHz	16QAM	19175	1RB#24	12.23	PASS
Band2	5MHz	16QAM	19175	12RB#0	12.15	PASS
Band2	5MHz	16QAM	19175	12RB#6	12.17	PASS
Band2	5MHz	16QAM	19175	12RB#13	12.13	PASS
Band2	5MHz	16QAM	19175	25RB#0	12.22	PASS
Band2	10MHz	QPSK	18650	1RB#0	12.05	PASS
Band2	10MHz	QPSK	18650	1RB#24	11.90	PASS
Band2	10MHz	QPSK	18650	1RB#49	11.82	PASS
Band2	10MHz	QPSK	18650	25RB#0	11.98	PASS
Band2	10MHz	QPSK	18650	25RB#12	11.94	PASS
Band2	10MHz	QPSK	18650	25RB#25	11.90	PASS
Band2	10MHz	QPSK	18650	50RB#0	11.96	PASS
Band2	10MHz	QPSK	18900	1RB#0	12.10	PASS
Band2	10MHz	QPSK	18900	1RB#24	12.20	PASS
Band2	10MHz	QPSK	18900	1RB#49	12.07	PASS
Band2	10MHz	QPSK	18900	25RB#0	12.17	PASS
Band2	10MHz	QPSK	18900	25RB#12	12.19	PASS
Band2	10MHz	QPSK	18900	25RB#25	12.09	PASS
Band2	10MHz	QPSK	18900	50RB#0	12.13	PASS
Band2	10MHz	QPSK	19150	1RB#0	12.01	PASS
Band2	10MHz	QPSK	19150	1RB#24	12.17	PASS
Band2	10MHz	QPSK	19150	1RB#49	12.10	PASS
Band2	10MHz	QPSK	19150	25RB#0	12.20	PASS
Band2	10MHz	QPSK	19150	25RB#12	12.20	PASS

Band2	10MHz	QPSK	19150	25RB#25	12.16	PASS
Band2	10MHz	QPSK	19150	50RB#0	12.21	PASS
Band2	10MHz	16QAM	18650	1RB#0	12.24	PASS
Band2	10MHz	16QAM	18650	1RB#24	12.10	PASS
Band2	10MHz	16QAM	18650	1RB#49	11.97	PASS
Band2	10MHz	16QAM	18650	25RB#0	11.97	PASS
Band2	10MHz	16QAM	18650	25RB#12	11.95	PASS
Band2	10MHz	16QAM	18650	25RB#25	11.91	PASS
Band2	10MHz	16QAM	18650	50RB#0	11.94	PASS
Band2	10MHz	16QAM	18900	1RB#0	12.28	PASS
Band2	10MHz	16QAM	18900	1RB#24	12.33	PASS
Band2	10MHz	16QAM	18900	1RB#49	12.26	PASS
Band2	10MHz	16QAM	18900	25RB#0	12.18	PASS
Band2	10MHz	16QAM	18900	25RB#12	12.18	PASS
Band2	10MHz	16QAM	18900	25RB#25	12.09	PASS
Band2	10MHz	16QAM	18900	50RB#0	12.10	PASS
Band2	10MHz	16QAM	19150	1RB#0	12.19	PASS
Band2	10MHz	16QAM	19150	1RB#24	12.36	PASS
Band2	10MHz	16QAM	19150	1RB#49	12.33	PASS
Band2	10MHz	16QAM	19150	25RB#0	12.19	PASS
Band2	10MHz	16QAM	19150	25RB#12	12.17	PASS
Band2	10MHz	16QAM	19150	25RB#25	12.15	PASS
Band2	10MHz	16QAM	19150	50RB#0	12.18	PASS
Band2	15MHz	QPSK	18675	1RB#0	12.03	PASS
Band2	15MHz	QPSK	18675	1RB#38	11.90	PASS
Band2	15MHz	QPSK	18675	1RB#74	11.69	PASS
Band2	15MHz	QPSK	18675	38RB#0	11.92	PASS
Band2	15MHz	QPSK	18675	38RB#18	11.88	PASS
Band2	15MHz	QPSK	18675	38RB#37	11.87	PASS
Band2	15MHz	QPSK	18675	75RB#0	11.87	PASS
Band2	15MHz	QPSK	18900	1RB#0	12.06	PASS
Band2	15MHz	QPSK	18900	1RB#38	12.10	PASS
Band2	15MHz	QPSK	18900	1RB#74	11.95	PASS
Band2	15MHz	QPSK	18900	38RB#0	12.14	PASS
Band2	15MHz	QPSK	18900	38RB#18	12.12	PASS
Band2	15MHz	QPSK	18900	38RB#37	12.14	PASS
Band2	15MHz	QPSK	18900	75RB#0	12.13	PASS

Band2	15MHz	QPSK	19125	1RB#0	11.90	PASS
Band2	15MHz	QPSK	19125	1RB#38	12.06	PASS
Band2	15MHz	QPSK	19125	1RB#74	12.09	PASS
Band2	15MHz	QPSK	19125	38RB#0	12.07	PASS
Band2	15MHz	QPSK	19125	38RB#18	12.08	PASS
Band2	15MHz	QPSK	19125	38RB#37	12.08	PASS
Band2	15MHz	QPSK	19125	75RB#0	12.08	PASS
Band2	15MHz	16QAM	18675	1RB#0	12.25	PASS
Band2	15MHz	16QAM	18675	1RB#38	12.03	PASS
Band2	15MHz	16QAM	18675	1RB#74	11.91	PASS
Band2	15MHz	16QAM	18675	38RB#0	11.87	PASS
Band2	15MHz	16QAM	18675	38RB#18	11.88	PASS
Band2	15MHz	16QAM	18675	38RB#37	11.88	PASS
Band2	15MHz	16QAM	18675	75RB#0	11.83	PASS
Band2	15MHz	16QAM	18900	1RB#0	12.21	PASS
Band2	15MHz	16QAM	18900	1RB#38	12.28	PASS
Band2	15MHz	16QAM	18900	1RB#74	12.16	PASS
Band2	15MHz	16QAM	18900	38RB#0	12.14	PASS
Band2	15MHz	16QAM	18900	38RB#18	12.14	PASS
Band2	15MHz	16QAM	18900	38RB#37	12.08	PASS
Band2	15MHz	16QAM	18900	75RB#0	12.10	PASS
Band2	15MHz	16QAM	19125	1RB#0	12.09	PASS
Band2	15MHz	16QAM	19125	1RB#38	12.25	PASS
Band2	15MHz	16QAM	19125	1RB#74	12.28	PASS
Band2	15MHz	16QAM	19125	38RB#0	12.10	PASS
Band2	15MHz	16QAM	19125	38RB#18	12.10	PASS
Band2	15MHz	16QAM	19125	38RB#37	12.08	PASS
Band2	15MHz	16QAM	19125	75RB#0	12.05	PASS
Band2	20MHz	QPSK	18700	1RB#0	12.16	PASS
Band2	20MHz	QPSK	18700	1RB#49	11.95	PASS
Band2	20MHz	QPSK	18700	1RB#99	11.94	PASS
Band2	20MHz	QPSK	18700	50RB#0	12.02	PASS
Band2	20MHz	QPSK	18700	50RB#25	11.99	PASS
Band2	20MHz	QPSK	18700	50RB#50	11.88	PASS
Band2	20MHz	QPSK	18700	100RB#0	11.94	PASS
Band2	20MHz	QPSK	18900	1RB#0	12.06	PASS
Band2	20MHz	QPSK	18900	1RB#49	12.19	PASS

Band2	20MHz	QPSK	18900	1RB#99	11.95	PASS
Band2	20MHz	QPSK	18900	50RB#0	12.39	PASS
Band2	20MHz	QPSK	18900	50RB#25	12.22	PASS
Band2	20MHz	QPSK	18900	50RB#50	12.06	PASS
Band2	20MHz	QPSK	18900	100RB#0	12.12	PASS
Band2	20MHz	QPSK	19100	1RB#0	11.96	PASS
Band2	20MHz	QPSK	19100	1RB#49	12.08	PASS
Band2	20MHz	QPSK	19100	1RB#99	12.18	PASS
Band2	20MHz	QPSK	19100	50RB#0	11.97	PASS
Band2	20MHz	QPSK	19100	50RB#25	11.96	PASS
Band2	20MHz	QPSK	19100	50RB#50	11.99	PASS
Band2	20MHz	QPSK	19100	100RB#0	12.00	PASS
Band2	20MHz	16QAM	18700	1RB#0	12.17	PASS
Band2	20MHz	16QAM	18700	1RB#49	11.96	PASS
Band2	20MHz	16QAM	18700	1RB#99	11.94	PASS
Band2	20MHz	16QAM	18700	50RB#0	11.98	PASS
Band2	20MHz	16QAM	18700	50RB#25	11.98	PASS
Band2	20MHz	16QAM	18700	50RB#50	11.88	PASS
Band2	20MHz	16QAM	18700	100RB#0	11.93	PASS
Band2	20MHz	16QAM	18900	1RB#0	12.26	PASS
Band2	20MHz	16QAM	18900	1RB#49	12.31	PASS
Band2	20MHz	16QAM	18900	1RB#99	12.22	PASS
Band2	20MHz	16QAM	18900	50RB#0	12.22	PASS
Band2	20MHz	16QAM	18900	50RB#25	12.23	PASS
Band2	20MHz	16QAM	18900	50RB#50	12.08	PASS
Band2	20MHz	16QAM	18900	100RB#0	12.15	PASS
Band2	20MHz	16QAM	19100	1RB#0	11.97	PASS
Band2	20MHz	16QAM	19100	1RB#49	12.10	PASS
Band2	20MHz	16QAM	19100	1RB#99	12.14	PASS
Band2	20MHz	16QAM	19100	50RB#0	11.98	PASS
Band2	20MHz	16QAM	19100	50RB#25	11.97	PASS
Band2	20MHz	16QAM	19100	50RB#50	11.96	PASS
Band2	20MHz	16QAM	19100	100RB#0	11.97	PASS

LTE(P3): Hotspot ON

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Verdict
Band2	1.4MHz	QPSK	18607	1RB#0	17.33	PASS
Band2	1.4MHz	QPSK	18607	1RB#2	17.25	PASS
Band2	1.4MHz	QPSK	18607	1RB#5	17.30	PASS
Band2	1.4MHz	QPSK	18607	3RB#0	17.25	PASS
Band2	1.4MHz	QPSK	18607	3RB#1	17.25	PASS
Band2	1.4MHz	QPSK	18607	3RB#3	17.28	PASS
Band2	1.4MHz	QPSK	18607	6RB#0	17.31	PASS
Band2	1.4MHz	QPSK	18900	1RB#0	17.34	PASS
Band2	1.4MHz	QPSK	18900	1RB#2	17.31	PASS
Band2	1.4MHz	QPSK	18900	1RB#5	17.30	PASS
Band2	1.4MHz	QPSK	18900	3RB#0	17.29	PASS
Band2	1.4MHz	QPSK	18900	3RB#1	17.29	PASS
Band2	1.4MHz	QPSK	18900	3RB#3	17.31	PASS
Band2	1.4MHz	QPSK	18900	6RB#0	17.32	PASS
Band2	1.4MHz	QPSK	19193	1RB#0	17.42	PASS
Band2	1.4MHz	QPSK	19193	1RB#2	17.35	PASS
Band2	1.4MHz	QPSK	19193	1RB#5	17.36	PASS
Band2	1.4MHz	QPSK	19193	3RB#0	17.35	PASS
Band2	1.4MHz	QPSK	19193	3RB#1	17.39	PASS
Band2	1.4MHz	QPSK	19193	3RB#3	17.38	PASS
Band2	1.4MHz	QPSK	19193	6RB#0	17.38	PASS
Band2	1.4MHz	16QAM	18607	1RB#0	17.45	PASS
Band2	1.4MHz	16QAM	18607	1RB#2	17.48	PASS
Band2	1.4MHz	16QAM	18607	1RB#5	17.42	PASS
Band2	1.4MHz	16QAM	18607	3RB#0	17.17	PASS
Band2	1.4MHz	16QAM	18607	3RB#1	17.17	PASS
Band2	1.4MHz	16QAM	18607	3RB#3	17.20	PASS
Band2	1.4MHz	16QAM	18607	6RB#0	17.15	PASS
Band2	1.4MHz	16QAM	18900	1RB#0	17.47	PASS
Band2	1.4MHz	16QAM	18900	1RB#2	17.54	PASS
Band2	1.4MHz	16QAM	18900	1RB#5	17.47	PASS
Band2	1.4MHz	16QAM	18900	3RB#0	17.16	PASS
Band2	1.4MHz	16QAM	18900	3RB#1	17.18	PASS
Band2	1.4MHz	16QAM	18900	3RB#3	17.16	PASS

Band2	1.4MHz	16QAM	18900	6RB#0	17.32	PASS
Band2	1.4MHz	16QAM	19193	1RB#0	17.52	PASS
Band2	1.4MHz	16QAM	19193	1RB#2	17.58	PASS
Band2	1.4MHz	16QAM	19193	1RB#5	17.48	PASS
Band2	1.4MHz	16QAM	19193	3RB#0	17.28	PASS
Band2	1.4MHz	16QAM	19193	3RB#1	17.26	PASS
Band2	1.4MHz	16QAM	19193	3RB#3	17.22	PASS
Band2	1.4MHz	16QAM	19193	6RB#0	17.44	PASS
Band2	3MHz	QPSK	18615	1RB#0	17.21	PASS
Band2	3MHz	QPSK	18615	1RB#8	17.16	PASS
Band2	3MHz	QPSK	18615	1RB#14	17.15	PASS
Band2	3MHz	QPSK	18615	8RB#0	17.25	PASS
Band2	3MHz	QPSK	18615	8RB#4	17.25	PASS
Band2	3MHz	QPSK	18615	8RB#7	17.18	PASS
Band2	3MHz	QPSK	18615	15RB#0	17.20	PASS
Band2	3MHz	QPSK	18900	1RB#0	17.31	PASS
Band2	3MHz	QPSK	18900	1RB#8	17.28	PASS
Band2	3MHz	QPSK	18900	1RB#14	17.27	PASS
Band2	3MHz	QPSK	18900	8RB#0	17.29	PASS
Band2	3MHz	QPSK	18900	8RB#4	17.29	PASS
Band2	3MHz	QPSK	18900	8RB#7	17.29	PASS
Band2	3MHz	QPSK	18900	15RB#0	17.29	PASS
Band2	3MHz	QPSK	19185	1RB#0	17.37	PASS
Band2	3MHz	QPSK	19185	1RB#8	17.36	PASS
Band2	3MHz	QPSK	19185	1RB#14	17.33	PASS
Band2	3MHz	QPSK	19185	8RB#0	17.37	PASS
Band2	3MHz	QPSK	19185	8RB#4	17.38	PASS
Band2	3MHz	QPSK	19185	8RB#7	17.36	PASS
Band2	3MHz	QPSK	19185	15RB#0	17.35	PASS
Band2	3MHz	16QAM	18615	1RB#0	17.40	PASS
Band2	3MHz	16QAM	18615	1RB#8	17.36	PASS
Band2	3MHz	16QAM	18615	1RB#14	17.32	PASS
Band2	3MHz	16QAM	18615	8RB#0	17.33	PASS
Band2	3MHz	16QAM	18615	8RB#4	17.31	PASS
Band2	3MHz	16QAM	18615	8RB#7	17.28	PASS
Band2	3MHz	16QAM	18615	15RB#0	17.27	PASS
Band2	3MHz	16QAM	18900	1RB#0	17.48	PASS

Band2	3MHz	16QAM	18900	1RB#8	17.44	PASS
Band2	3MHz	16QAM	18900	1RB#14	17.46	PASS
Band2	3MHz	16QAM	18900	8RB#0	17.38	PASS
Band2	3MHz	16QAM	18900	8RB#4	17.39	PASS
Band2	3MHz	16QAM	18900	8RB#7	17.33	PASS
Band2	3MHz	16QAM	18900	15RB#0	17.33	PASS
Band2	3MHz	16QAM	19185	1RB#0	17.51	PASS
Band2	3MHz	16QAM	19185	1RB#8	17.50	PASS
Band2	3MHz	16QAM	19185	1RB#14	17.50	PASS
Band2	3MHz	16QAM	19185	8RB#0	17.44	PASS
Band2	3MHz	16QAM	19185	8RB#4	17.48	PASS
Band2	3MHz	16QAM	19185	8RB#7	17.44	PASS
Band2	3MHz	16QAM	19185	15RB#0	17.40	PASS
Band2	5MHz	QPSK	18625	1RB#0	17.37	PASS
Band2	5MHz	QPSK	18625	1RB#12	17.26	PASS
Band2	5MHz	QPSK	18625	1RB#24	17.23	PASS
Band2	5MHz	QPSK	18625	12RB#0	17.24	PASS
Band2	5MHz	QPSK	18625	12RB#6	17.27	PASS
Band2	5MHz	QPSK	18625	12RB#13	17.18	PASS
Band2	5MHz	QPSK	18625	25RB#0	17.19	PASS
Band2	5MHz	QPSK	18900	1RB#0	17.43	PASS
Band2	5MHz	QPSK	18900	1RB#12	17.40	PASS
Band2	5MHz	QPSK	18900	1RB#24	17.38	PASS
Band2	5MHz	QPSK	18900	12RB#0	17.34	PASS
Band2	5MHz	QPSK	18900	12RB#6	17.35	PASS
Band2	5MHz	QPSK	18900	12RB#13	17.26	PASS
Band2	5MHz	QPSK	18900	25RB#0	17.27	PASS
Band2	5MHz	QPSK	19175	1RB#0	17.47	PASS
Band2	5MHz	QPSK	19175	1RB#12	17.46	PASS
Band2	5MHz	QPSK	19175	1RB#24	17.47	PASS
Band2	5MHz	QPSK	19175	12RB#0	17.41	PASS
Band2	5MHz	QPSK	19175	12RB#6	17.37	PASS
Band2	5MHz	QPSK	19175	12RB#13	17.38	PASS
Band2	5MHz	QPSK	19175	25RB#0	17.38	PASS
Band2	5MHz	16QAM	18625	1RB#0	17.37	PASS
Band2	5MHz	16QAM	18625	1RB#12	17.22	PASS
Band2	5MHz	16QAM	18625	1RB#24	17.21	PASS

Band2	5MHz	16QAM	18625	12RB#0	17.25	PASS
Band2	5MHz	16QAM	18625	12RB#6	17.23	PASS
Band2	5MHz	16QAM	18625	12RB#13	17.12	PASS
Band2	5MHz	16QAM	18625	25RB#0	17.23	PASS
Band2	5MHz	16QAM	18900	1RB#0	17.44	PASS
Band2	5MHz	16QAM	18900	1RB#12	17.37	PASS
Band2	5MHz	16QAM	18900	1RB#24	17.35	PASS
Band2	5MHz	16QAM	18900	12RB#0	17.34	PASS
Band2	5MHz	16QAM	18900	12RB#6	17.32	PASS
Band2	5MHz	16QAM	18900	12RB#13	17.21	PASS
Band2	5MHz	16QAM	18900	25RB#0	17.32	PASS
Band2	5MHz	16QAM	19175	1RB#0	17.48	PASS
Band2	5MHz	16QAM	19175	1RB#12	17.40	PASS
Band2	5MHz	16QAM	19175	1RB#24	17.47	PASS
Band2	5MHz	16QAM	19175	12RB#0	17.40	PASS
Band2	5MHz	16QAM	19175	12RB#6	17.39	PASS
Band2	5MHz	16QAM	19175	12RB#13	17.36	PASS
Band2	5MHz	16QAM	19175	25RB#0	17.43	PASS
Band2	10MHz	QPSK	18650	1RB#0	17.30	PASS
Band2	10MHz	QPSK	18650	1RB#24	17.17	PASS
Band2	10MHz	QPSK	18650	1RB#49	17.03	PASS
Band2	10MHz	QPSK	18650	25RB#0	17.18	PASS
Band2	10MHz	QPSK	18650	25RB#12	17.21	PASS
Band2	10MHz	QPSK	18650	25RB#25	17.14	PASS
Band2	10MHz	QPSK	18650	50RB#0	17.19	PASS
Band2	10MHz	QPSK	18900	1RB#0	17.33	PASS
Band2	10MHz	QPSK	18900	1RB#24	17.39	PASS
Band2	10MHz	QPSK	18900	1RB#49	17.30	PASS
Band2	10MHz	QPSK	18900	25RB#0	17.37	PASS
Band2	10MHz	QPSK	18900	25RB#12	17.38	PASS
Band2	10MHz	QPSK	18900	25RB#25	17.30	PASS
Band2	10MHz	QPSK	18900	50RB#0	17.35	PASS
Band2	10MHz	QPSK	19150	1RB#0	17.29	PASS
Band2	10MHz	QPSK	19150	1RB#24	17.38	PASS
Band2	10MHz	QPSK	19150	1RB#49	17.34	PASS
Band2	10MHz	QPSK	19150	25RB#0	17.40	PASS
Band2	10MHz	QPSK	19150	25RB#12	17.43	PASS

Band2	10MHz	QPSK	19150	25RB#25	17.40	PASS
Band2	10MHz	QPSK	19150	50RB#0	17.44	PASS
Band2	10MHz	16QAM	18650	1RB#0	17.44	PASS
Band2	10MHz	16QAM	18650	1RB#24	17.35	PASS
Band2	10MHz	16QAM	18650	1RB#49	17.23	PASS
Band2	10MHz	16QAM	18650	25RB#0	17.24	PASS
Band2	10MHz	16QAM	18650	25RB#12	17.23	PASS
Band2	10MHz	16QAM	18650	25RB#25	17.12	PASS
Band2	10MHz	16QAM	18650	50RB#0	17.20	PASS
Band2	10MHz	16QAM	18900	1RB#0	17.50	PASS
Band2	10MHz	16QAM	18900	1RB#24	17.54	PASS
Band2	10MHz	16QAM	18900	1RB#49	17.47	PASS
Band2	10MHz	16QAM	18900	25RB#0	17.42	PASS
Band2	10MHz	16QAM	18900	25RB#12	17.41	PASS
Band2	10MHz	16QAM	18900	25RB#25	17.28	PASS
Band2	10MHz	16QAM	18900	50RB#0	17.36	PASS
Band2	10MHz	16QAM	19150	1RB#0	17.42	PASS
Band2	10MHz	16QAM	19150	1RB#24	17.54	PASS
Band2	10MHz	16QAM	19150	1RB#49	17.55	PASS
Band2	10MHz	16QAM	19150	25RB#0	17.41	PASS
Band2	10MHz	16QAM	19150	25RB#12	17.41	PASS
Band2	10MHz	16QAM	19150	25RB#25	17.36	PASS
Band2	10MHz	16QAM	19150	50RB#0	17.40	PASS
Band2	15MHz	QPSK	18675	1RB#0	17.26	PASS
Band2	15MHz	QPSK	18675	1RB#38	17.05	PASS
Band2	15MHz	QPSK	18675	1RB#74	16.92	PASS
Band2	15MHz	QPSK	18675	38RB#0	17.11	PASS
Band2	15MHz	QPSK	18675	38RB#18	17.12	PASS
Band2	15MHz	QPSK	18675	38RB#37	17.13	PASS
Band2	15MHz	QPSK	18675	75RB#0	17.12	PASS
Band2	15MHz	QPSK	18900	1RB#0	17.24	PASS
Band2	15MHz	QPSK	18900	1RB#38	17.35	PASS
Band2	15MHz	QPSK	18900	1RB#74	17.16	PASS
Band2	15MHz	QPSK	18900	38RB#0	17.37	PASS
Band2	15MHz	QPSK	18900	38RB#18	17.37	PASS
Band2	15MHz	QPSK	18900	38RB#37	17.38	PASS
Band2	15MHz	QPSK	18900	75RB#0	17.37	PASS

Band2	15MHz	QPSK	19125	1RB#0	17.07	PASS
Band2	15MHz	QPSK	19125	1RB#38	17.25	PASS
Band2	15MHz	QPSK	19125	1RB#74	17.28	PASS
Band2	15MHz	QPSK	19125	38RB#0	17.32	PASS
Band2	15MHz	QPSK	19125	38RB#18	17.31	PASS
Band2	15MHz	QPSK	19125	38RB#37	17.32	PASS
Band2	15MHz	QPSK	19125	75RB#0	17.33	PASS
Band2	15MHz	16QAM	18675	1RB#0	17.47	PASS
Band2	15MHz	16QAM	18675	1RB#38	17.30	PASS
Band2	15MHz	16QAM	18675	1RB#74	17.16	PASS
Band2	15MHz	16QAM	18675	38RB#0	17.12	PASS
Band2	15MHz	16QAM	18675	38RB#18	17.13	PASS
Band2	15MHz	16QAM	18675	38RB#37	17.14	PASS
Band2	15MHz	16QAM	18675	75RB#0	17.05	PASS
Band2	15MHz	16QAM	18900	1RB#0	17.43	PASS
Band2	15MHz	16QAM	18900	1RB#38	17.52	PASS
Band2	15MHz	16QAM	18900	1RB#74	17.35	PASS
Band2	15MHz	16QAM	18900	38RB#0	17.37	PASS
Band2	15MHz	16QAM	18900	38RB#18	17.37	PASS
Band2	15MHz	16QAM	18900	38RB#37	17.36	PASS
Band2	15MHz	16QAM	18900	75RB#0	17.33	PASS
Band2	15MHz	16QAM	19125	1RB#0	17.27	PASS
Band2	15MHz	16QAM	19125	1RB#38	17.44	PASS
Band2	15MHz	16QAM	19125	1RB#74	17.47	PASS
Band2	15MHz	16QAM	19125	38RB#0	17.31	PASS
Band2	15MHz	16QAM	19125	38RB#18	17.32	PASS
Band2	15MHz	16QAM	19125	38RB#37	17.32	PASS
Band2	15MHz	16QAM	19125	75RB#0	17.25	PASS
Band2	20MHz	QPSK	18700	1RB#0	17.38	PASS
Band2	20MHz	QPSK	18700	1RB#49	17.22	PASS
Band2	20MHz	QPSK	18700	1RB#99	17.17	PASS
Band2	20MHz	QPSK	18700	50RB#0	17.24	PASS
Band2	20MHz	QPSK	18700	50RB#25	17.24	PASS
Band2	20MHz	QPSK	18700	50RB#50	17.15	PASS
Band2	20MHz	QPSK	18700	100RB#0	17.20	PASS
Band2	20MHz	QPSK	18900	1RB#0	17.27	PASS
Band2	20MHz	QPSK	18900	1RB#49	17.43	PASS

Band2	20MHz	QPSK	18900	1RB#99	17.20	PASS
Band2	20MHz	QPSK	18900	50RB#0	17.63	PASS
Band2	20MHz	QPSK	18900	50RB#25	17.41	PASS
Band2	20MHz	QPSK	18900	50RB#50	17.29	PASS
Band2	20MHz	QPSK	18900	100RB#0	17.33	PASS
Band2	20MHz	QPSK	19100	1RB#0	17.21	PASS
Band2	20MHz	QPSK	19100	1RB#49	17.28	PASS
Band2	20MHz	QPSK	19100	1RB#99	17.41	PASS
Band2	20MHz	QPSK	19100	50RB#0	17.16	PASS
Band2	20MHz	QPSK	19100	50RB#25	17.20	PASS
Band2	20MHz	QPSK	19100	50RB#50	17.14	PASS
Band2	20MHz	QPSK	19100	100RB#0	17.23	PASS
Band2	20MHz	16QAM	18700	1RB#0	17.42	PASS
Band2	20MHz	16QAM	18700	1RB#49	17.27	PASS
Band2	20MHz	16QAM	18700	1RB#99	17.18	PASS
Band2	20MHz	16QAM	18700	50RB#0	17.24	PASS
Band2	20MHz	16QAM	18700	50RB#25	17.20	PASS
Band2	20MHz	16QAM	18700	50RB#50	17.10	PASS
Band2	20MHz	16QAM	18700	100RB#0	17.14	PASS
Band2	20MHz	16QAM	18900	1RB#0	17.48	PASS
Band2	20MHz	16QAM	18900	1RB#49	17.44	PASS
Band2	20MHz	16QAM	18900	1RB#99	17.41	PASS
Band2	20MHz	16QAM	18900	50RB#0	17.41	PASS
Band2	20MHz	16QAM	18900	50RB#25	17.45	PASS
Band2	20MHz	16QAM	18900	50RB#50	17.30	PASS
Band2	20MHz	16QAM	18900	100RB#0	17.33	PASS
Band2	20MHz	16QAM	19100	1RB#0	17.22	PASS
Band2	20MHz	16QAM	19100	1RB#49	17.30	PASS
Band2	20MHz	16QAM	19100	1RB#99	17.41	PASS
Band2	20MHz	16QAM	19100	50RB#0	17.16	PASS
Band2	20MHz	16QAM	19100	50RB#25	17.19	PASS
Band2	20MHz	16QAM	19100	50RB#50	17.17	PASS
Band2	20MHz	16QAM	19100	100RB#0	17.16	PASS

LTE(P1):

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Verdict
Band4	1.4MHz	QPSK	19957	1RB#0	22.09	PASS
Band4	1.4MHz	QPSK	19957	1RB#2	22.07	PASS
Band4	1.4MHz	QPSK	19957	1RB#5	22.08	PASS
Band4	1.4MHz	QPSK	19957	3RB#0	22.08	PASS
Band4	1.4MHz	QPSK	19957	3RB#1	22.06	PASS
Band4	1.4MHz	QPSK	19957	3RB#3	22.09	PASS
Band4	1.4MHz	QPSK	19957	6RB#0	21.07	PASS
Band4	1.4MHz	QPSK	20175	1RB#0	21.64	PASS
Band4	1.4MHz	QPSK	20175	1RB#2	21.64	PASS
Band4	1.4MHz	QPSK	20175	1RB#5	21.73	PASS
Band4	1.4MHz	QPSK	20175	3RB#0	21.66	PASS
Band4	1.4MHz	QPSK	20175	3RB#1	21.68	PASS
Band4	1.4MHz	QPSK	20175	3RB#3	21.68	PASS
Band4	1.4MHz	QPSK	20175	6RB#0	21.62	PASS
Band4	1.4MHz	QPSK	20393	1RB#0	21.56	PASS
Band4	1.4MHz	QPSK	20393	1RB#2	21.47	PASS
Band4	1.4MHz	QPSK	20393	1RB#5	21.45	PASS
Band4	1.4MHz	QPSK	20393	3RB#0	21.53	PASS
Band4	1.4MHz	QPSK	20393	3RB#1	21.54	PASS
Band4	1.4MHz	QPSK	20393	3RB#3	21.49	PASS
Band4	1.4MHz	QPSK	20393	6RB#0	21.49	PASS
Band4	1.4MHz	16QAM	19957	1RB#0	21.23	PASS
Band4	1.4MHz	16QAM	19957	1RB#2	21.28	PASS
Band4	1.4MHz	16QAM	19957	1RB#5	21.22	PASS
Band4	1.4MHz	16QAM	19957	3RB#0	21.97	PASS
Band4	1.4MHz	16QAM	19957	3RB#1	21.96	PASS
Band4	1.4MHz	16QAM	19957	3RB#3	21.95	PASS
Band4	1.4MHz	16QAM	19957	6RB#0	21.93	PASS
Band4	1.4MHz	16QAM	20175	1RB#0	21.77	PASS
Band4	1.4MHz	16QAM	20175	1RB#2	21.87	PASS
Band4	1.4MHz	16QAM	20175	1RB#5	21.85	PASS
Band4	1.4MHz	16QAM	20175	3RB#0	21.54	PASS
Band4	1.4MHz	16QAM	20175	3RB#1	21.54	PASS
Band4	1.4MHz	16QAM	20175	3RB#3	21.54	PASS

Band4	1.4MHz	16QAM	20175	6RB#0	21.47	PASS
Band4	1.4MHz	16QAM	20393	1RB#0	21.75	PASS
Band4	1.4MHz	16QAM	20393	1RB#2	21.75	PASS
Band4	1.4MHz	16QAM	20393	1RB#5	21.66	PASS
Band4	1.4MHz	16QAM	20393	3RB#0	21.40	PASS
Band4	1.4MHz	16QAM	20393	3RB#1	21.39	PASS
Band4	1.4MHz	16QAM	20393	3RB#3	21.37	PASS
Band4	1.4MHz	16QAM	20393	6RB#0	21.51	PASS
Band4	3MHz	QPSK	19965	1RB#0	22.05	PASS
Band4	3MHz	QPSK	19965	1RB#8	22.04	PASS
Band4	3MHz	QPSK	19965	1RB#14	22.01	PASS
Band4	3MHz	QPSK	19965	8RB#0	21.07	PASS
Band4	3MHz	QPSK	19965	8RB#4	21.09	PASS
Band4	3MHz	QPSK	19965	8RB#7	21.04	PASS
Band4	3MHz	QPSK	19965	15RB#0	21.06	PASS
Band4	3MHz	QPSK	20175	1RB#0	21.58	PASS
Band4	3MHz	QPSK	20175	1RB#8	21.61	PASS
Band4	3MHz	QPSK	20175	1RB#14	21.60	PASS
Band4	3MHz	QPSK	20175	8RB#0	21.59	PASS
Band4	3MHz	QPSK	20175	8RB#4	21.60	PASS
Band4	3MHz	QPSK	20175	8RB#7	21.58	PASS
Band4	3MHz	QPSK	20175	15RB#0	21.62	PASS
Band4	3MHz	QPSK	20385	1RB#0	21.70	PASS
Band4	3MHz	QPSK	20385	1RB#8	21.54	PASS
Band4	3MHz	QPSK	20385	1RB#14	21.50	PASS
Band4	3MHz	QPSK	20385	8RB#0	21.60	PASS
Band4	3MHz	QPSK	20385	8RB#4	21.58	PASS
Band4	3MHz	QPSK	20385	8RB#7	21.52	PASS
Band4	3MHz	QPSK	20385	15RB#0	21.56	PASS
Band4	3MHz	16QAM	19965	1RB#0	21.19	PASS
Band4	3MHz	16QAM	19965	1RB#8	21.17	PASS
Band4	3MHz	16QAM	19965	1RB#14	21.16	PASS
Band4	3MHz	16QAM	19965	8RB#0	21.59	PASS
Band4	3MHz	16QAM	19965	8RB#4	21.42	PASS
Band4	3MHz	16QAM	19965	8RB#7	21.71	PASS
Band4	3MHz	16QAM	19965	15RB#0	21.67	PASS
Band4	3MHz	16QAM	20175	1RB#0	21.79	PASS

Band4	3MHz	16QAM	20175	1RB#8	21.82	PASS
Band4	3MHz	16QAM	20175	1RB#14	21.76	PASS
Band4	3MHz	16QAM	20175	8RB#0	21.66	PASS
Band4	3MHz	16QAM	20175	8RB#4	21.66	PASS
Band4	3MHz	16QAM	20175	8RB#7	21.62	PASS
Band4	3MHz	16QAM	20175	15RB#0	21.60	PASS
Band4	3MHz	16QAM	20385	1RB#0	21.85	PASS
Band4	3MHz	16QAM	20385	1RB#8	21.73	PASS
Band4	3MHz	16QAM	20385	1RB#14	21.66	PASS
Band4	3MHz	16QAM	20385	8RB#0	21.61	PASS
Band4	3MHz	16QAM	20385	8RB#4	21.61	PASS
Band4	3MHz	16QAM	20385	8RB#7	21.54	PASS
Band4	3MHz	16QAM	20385	15RB#0	21.49	PASS
Band4	5MHz	QPSK	19975	1RB#0	22.25	PASS
Band4	5MHz	QPSK	19975	1RB#12	22.23	PASS
Band4	5MHz	QPSK	19975	1RB#24	22.22	PASS
Band4	5MHz	QPSK	19975	12RB#0	21.08	PASS
Band4	5MHz	QPSK	19975	12RB#6	21.10	PASS
Band4	5MHz	QPSK	19975	12RB#13	21.10	PASS
Band4	5MHz	QPSK	19975	25RB#0	21.09	PASS
Band4	5MHz	QPSK	20175	1RB#0	21.76	PASS
Band4	5MHz	QPSK	20175	1RB#12	21.82	PASS
Band4	5MHz	QPSK	20175	1RB#24	21.80	PASS
Band4	5MHz	QPSK	20175	12RB#0	20.72	PASS
Band4	5MHz	QPSK	20175	12RB#6	20.70	PASS
Band4	5MHz	QPSK	20175	12RB#13	20.77	PASS
Band4	5MHz	QPSK	20175	25RB#0	20.62	PASS
Band4	5MHz	QPSK	20375	1RB#0	21.84	PASS
Band4	5MHz	QPSK	20375	1RB#12	21.73	PASS
Band4	5MHz	QPSK	20375	1RB#24	21.63	PASS
Band4	5MHz	QPSK	20375	12RB#0	21.71	PASS
Band4	5MHz	QPSK	20375	12RB#6	21.68	PASS
Band4	5MHz	QPSK	20375	12RB#13	21.51	PASS
Band4	5MHz	QPSK	20375	25RB#0	21.63	PASS
Band4	5MHz	16QAM	19975	1RB#0	21.15	PASS
Band4	5MHz	16QAM	19975	1RB#12	21.10	PASS
Band4	5MHz	16QAM	19975	1RB#24	21.10	PASS

Band4	5MHz	16QAM	19975	12RB#0	21.76	PASS
Band4	5MHz	16QAM	19975	12RB#6	21.89	PASS
Band4	5MHz	16QAM	19975	12RB#13	21.90	PASS
Band4	5MHz	16QAM	19975	25RB#0	21.78	PASS
Band4	5MHz	16QAM	20175	1RB#0	21.70	PASS
Band4	5MHz	16QAM	20175	1RB#12	21.67	PASS
Band4	5MHz	16QAM	20175	1RB#24	21.71	PASS
Band4	5MHz	16QAM	20175	12RB#0	21.69	PASS
Band4	5MHz	16QAM	20175	12RB#6	21.66	PASS
Band4	5MHz	16QAM	20175	12RB#13	21.54	PASS
Band4	5MHz	16QAM	20175	25RB#0	21.62	PASS
Band4	5MHz	16QAM	20375	1RB#0	21.96	PASS
Band4	5MHz	16QAM	20375	1RB#12	21.87	PASS
Band4	5MHz	16QAM	20375	1RB#24	21.83	PASS
Band4	5MHz	16QAM	20375	12RB#0	21.71	PASS
Band4	5MHz	16QAM	20375	12RB#6	21.71	PASS
Band4	5MHz	16QAM	20375	12RB#13	21.53	PASS
Band4	5MHz	16QAM	20375	25RB#0	21.57	PASS
Band4	10MHz	QPSK	20000	1RB#0	22.10	PASS
Band4	10MHz	QPSK	20000	1RB#24	22.11	PASS
Band4	10MHz	QPSK	20000	1RB#49	21.82	PASS
Band4	10MHz	QPSK	20000	25RB#0	21.03	PASS
Band4	10MHz	QPSK	20000	25RB#12	21.06	PASS
Band4	10MHz	QPSK	20000	25RB#25	21.97	PASS
Band4	10MHz	QPSK	20000	50RB#0	21.00	PASS
Band4	10MHz	QPSK	20175	1RB#0	21.61	PASS
Band4	10MHz	QPSK	20175	1RB#24	21.71	PASS
Band4	10MHz	QPSK	20175	1RB#49	21.74	PASS
Band4	10MHz	QPSK	20175	25RB#0	20.66	PASS
Band4	10MHz	QPSK	20175	25RB#12	21.67	PASS
Band4	10MHz	QPSK	20175	25RB#25	21.62	PASS
Band4	10MHz	QPSK	20175	50RB#0	21.64	PASS
Band4	10MHz	QPSK	20350	1RB#0	21.87	PASS
Band4	10MHz	QPSK	20350	1RB#24	21.73	PASS
Band4	10MHz	QPSK	20350	1RB#49	21.48	PASS
Band4	10MHz	QPSK	20350	25RB#0	21.76	PASS
Band4	10MHz	QPSK	20350	25RB#12	21.74	PASS

Band4	10MHz	QPSK	20350	25RB#25	21.63	PASS
Band4	10MHz	QPSK	20350	50RB#0	21.74	PASS
Band4	10MHz	16QAM	20000	1RB#0	21.24	PASS
Band4	10MHz	16QAM	20000	1RB#24	21.22	PASS
Band4	10MHz	16QAM	20000	1RB#49	21.97	PASS
Band4	10MHz	16QAM	20000	25RB#0	21.03	PASS
Band4	10MHz	16QAM	20000	25RB#12	21.01	PASS
Band4	10MHz	16QAM	20000	25RB#25	21.95	PASS
Band4	10MHz	16QAM	20000	50RB#0	21.98	PASS
Band4	10MHz	16QAM	20175	1RB#0	21.71	PASS
Band4	10MHz	16QAM	20175	1RB#24	21.87	PASS
Band4	10MHz	16QAM	20175	1RB#49	21.89	PASS
Band4	10MHz	16QAM	20175	25RB#0	21.64	PASS
Band4	10MHz	16QAM	20175	25RB#12	21.65	PASS
Band4	10MHz	16QAM	20175	25RB#25	21.55	PASS
Band4	10MHz	16QAM	20175	50RB#0	21.59	PASS
Band4	10MHz	16QAM	20350	1RB#0	21.04	PASS
Band4	10MHz	16QAM	20350	1RB#24	21.94	PASS
Band4	10MHz	16QAM	20350	1RB#49	21.65	PASS
Band4	10MHz	16QAM	20350	25RB#0	21.78	PASS
Band4	10MHz	16QAM	20350	25RB#12	21.78	PASS
Band4	10MHz	16QAM	20350	25RB#25	21.62	PASS
Band4	10MHz	16QAM	20350	50RB#0	21.69	PASS
Band4	15MHz	QPSK	20025	1RB#0	21.49	PASS
Band4	15MHz	QPSK	20025	1RB#38	21.42	PASS
Band4	15MHz	QPSK	20025	1RB#74	21.20	PASS
Band4	15MHz	QPSK	20025	38RB#0	22.41	PASS
Band4	15MHz	QPSK	20025	38RB#18	22.41	PASS
Band4	15MHz	QPSK	20025	38RB#37	22.41	PASS
Band4	15MHz	QPSK	20025	75RB#0	22.41	PASS
Band4	15MHz	QPSK	20175	1RB#0	22.25	PASS
Band4	15MHz	QPSK	20175	1RB#38	22.37	PASS
Band4	15MHz	QPSK	20175	1RB#74	22.50	PASS
Band4	15MHz	QPSK	20175	38RB#0	22.34	PASS
Band4	15MHz	QPSK	20175	38RB#18	22.32	PASS
Band4	15MHz	QPSK	20175	38RB#37	22.33	PASS
Band4	15MHz	QPSK	20175	75RB#0	22.34	PASS

Band4	15MHz	QPSK	20325	1RB#0	22.83	PASS
Band4	15MHz	QPSK	20325	1RB#38	22.75	PASS
Band4	15MHz	QPSK	20325	1RB#74	22.71	PASS
Band4	15MHz	QPSK	20325	38RB#0	22.56	PASS
Band4	15MHz	QPSK	20325	38RB#18	22.66	PASS
Band4	15MHz	QPSK	20325	38RB#37	22.55	PASS
Band4	15MHz	QPSK	20325	75RB#0	22.55	PASS
Band4	15MHz	16QAM	20025	1RB#0	22.79	PASS
Band4	15MHz	16QAM	20025	1RB#38	22.61	PASS
Band4	15MHz	16QAM	20025	1RB#74	22.40	PASS
Band4	15MHz	16QAM	20025	38RB#0	22.42	PASS
Band4	15MHz	16QAM	20025	38RB#18	22.42	PASS
Band4	15MHz	16QAM	20025	38RB#37	22.41	PASS
Band4	15MHz	16QAM	20025	75RB#0	22.36	PASS
Band4	15MHz	16QAM	20175	1RB#0	22.42	PASS
Band4	15MHz	16QAM	20175	1RB#38	22.59	PASS
Band4	15MHz	16QAM	20175	1RB#74	22.70	PASS
Band4	15MHz	16QAM	20175	38RB#0	22.32	PASS
Band4	15MHz	16QAM	20175	38RB#18	22.32	PASS
Band4	15MHz	16QAM	20175	38RB#37	22.33	PASS
Band4	15MHz	16QAM	20175	75RB#0	22.29	PASS
Band4	15MHz	16QAM	20325	1RB#0	22.00	PASS
Band4	15MHz	16QAM	20325	1RB#38	22.12	PASS
Band4	15MHz	16QAM	20325	1RB#74	22.18	PASS
Band4	15MHz	16QAM	20325	38RB#0	22.51	PASS
Band4	15MHz	16QAM	20325	38RB#18	22.16	PASS
Band4	15MHz	16QAM	20325	38RB#37	22.16	PASS
Band4	15MHz	16QAM	20325	75RB#0	22.60	PASS
Band4	20MHz	QPSK	20050	1RB#0	22.86	PASS
Band4	20MHz	QPSK	20050	1RB#49	21.29	PASS
Band4	20MHz	QPSK	20050	1RB#99	21.21	PASS
Band4	20MHz	QPSK	20050	50RB#0	20.82	PASS
Band4	20MHz	QPSK	20050	50RB#25	20.80	PASS
Band4	20MHz	QPSK	20050	50RB#50	20.53	PASS
Band4	20MHz	QPSK	20050	100RB#0	20.65	PASS
Band4	20MHz	QPSK	20175	1RB#0	21.56	PASS
Band4	20MHz	QPSK	20175	1RB#49	21.79	PASS

Band4	20MHz	QPSK	20175	1RB#99	21.74	PASS
Band4	20MHz	QPSK	20175	50RB#0	21.64	PASS
Band4	20MHz	QPSK	20175	50RB#25	21.65	PASS
Band4	20MHz	QPSK	20175	50RB#50	21.61	PASS
Band4	20MHz	QPSK	20175	100RB#0	21.65	PASS
Band4	20MHz	QPSK	20300	1RB#0	21.99	PASS
Band4	20MHz	QPSK	20300	1RB#49	21.62	PASS
Band4	20MHz	QPSK	20300	1RB#99	21.23	PASS
Band4	20MHz	QPSK	20300	50RB#0	21.10	PASS
Band4	20MHz	QPSK	20300	50RB#25	21.09	PASS
Band4	20MHz	QPSK	20300	50RB#50	21.90	PASS
Band4	20MHz	QPSK	20300	100RB#0	21.02	PASS
Band4	20MHz	16QAM	20050	1RB#0	21.72	PASS
Band4	20MHz	16QAM	20050	1RB#49	21.28	PASS
Band4	20MHz	16QAM	20050	1RB#99	s22.74	PASS
Band4	20MHz	16QAM	20050	50RB#0	22.76	PASS
Band4	20MHz	16QAM	20050	50RB#25	22.72	PASS
Band4	20MHz	16QAM	20050	50RB#50	21.51	PASS
Band4	20MHz	16QAM	20050	100RB#0	21.59	PASS
Band4	20MHz	16QAM	20175	1RB#0	21.67	PASS
Band4	20MHz	16QAM	20175	1RB#49	21.79	PASS
Band4	20MHz	16QAM	20175	1RB#99	21.34	PASS
Band4	20MHz	16QAM	20175	50RB#0	21.58	PASS
Band4	20MHz	16QAM	20175	50RB#25	21.60	PASS
Band4	20MHz	16QAM	20175	50RB#50	21.58	PASS
Band4	20MHz	16QAM	20175	100RB#0	21.58	PASS
Band4	20MHz	16QAM	20300	1RB#0	21.47	PASS
Band4	20MHz	16QAM	20300	1RB#49	21.60	PASS
Band4	20MHz	16QAM	20300	1RB#99	21.53	PASS
Band4	20MHz	16QAM	20300	50RB#0	21.77	PASS
Band4	20MHz	16QAM	20300	50RB#25	21.79	PASS
Band4	20MHz	16QAM	20300	50RB#50	21.89	PASS
Band4	20MHz	16QAM	20300	100RB#0	21.98	PASS

LTE(P4): Sensor ON

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Verdict
Band4	1.4MHz	QPSK	19957	1RB#0	19.01	PASS
Band4	1.4MHz	QPSK	19957	1RB#2	18.96	PASS
Band4	1.4MHz	QPSK	19957	1RB#5	18.96	PASS
Band4	1.4MHz	QPSK	19957	3RB#0	18.99	PASS
Band4	1.4MHz	QPSK	19957	3RB#1	18.99	PASS
Band4	1.4MHz	QPSK	19957	3RB#3	18.96	PASS
Band4	1.4MHz	QPSK	19957	6RB#0	19.01	PASS
Band4	1.4MHz	QPSK	20175	1RB#0	18.67	PASS
Band4	1.4MHz	QPSK	20175	1RB#2	18.64	PASS
Band4	1.4MHz	QPSK	20175	1RB#5	18.67	PASS
Band4	1.4MHz	QPSK	20175	3RB#0	18.63	PASS
Band4	1.4MHz	QPSK	20175	3RB#1	18.64	PASS
Band4	1.4MHz	QPSK	20175	3RB#3	18.67	PASS
Band4	1.4MHz	QPSK	20175	6RB#0	18.65	PASS
Band4	1.4MHz	QPSK	20393	1RB#0	18.76	PASS
Band4	1.4MHz	QPSK	20393	1RB#2	18.74	PASS
Band4	1.4MHz	QPSK	20393	1RB#5	18.71	PASS
Band4	1.4MHz	QPSK	20393	3RB#0	18.70	PASS
Band4	1.4MHz	QPSK	20393	3RB#1	18.69	PASS
Band4	1.4MHz	QPSK	20393	3RB#3	18.68	PASS
Band4	1.4MHz	QPSK	20393	6RB#0	18.71	PASS
Band4	1.4MHz	16QAM	19957	1RB#0	18.22	PASS
Band4	1.4MHz	16QAM	19957	1RB#2	18.23	PASS
Band4	1.4MHz	16QAM	19957	1RB#5	18.16	PASS
Band4	1.4MHz	16QAM	19957	3RB#0	18.85	PASS
Band4	1.4MHz	16QAM	19957	3RB#1	18.86	PASS
Band4	1.4MHz	16QAM	19957	3RB#3	18.82	PASS
Band4	1.4MHz	16QAM	19957	6RB#0	18.99	PASS
Band4	1.4MHz	16QAM	20175	1RB#0	18.80	PASS
Band4	1.4MHz	16QAM	20175	1RB#2	18.88	PASS
Band4	1.4MHz	16QAM	20175	1RB#5	18.82	PASS
Band4	1.4MHz	16QAM	20175	3RB#0	18.56	PASS
Band4	1.4MHz	16QAM	20175	3RB#1	18.55	PASS
Band4	1.4MHz	16QAM	20175	3RB#3	18.57	PASS

Band4	1.4MHz	16QAM	20175	6RB#0	18.50	PASS
Band4	1.4MHz	16QAM	20393	1RB#0	18.74	PASS
Band4	1.4MHz	16QAM	20393	1RB#2	18.66	PASS
Band4	1.4MHz	16QAM	20393	1RB#5	18.66	PASS
Band4	1.4MHz	16QAM	20393	3RB#0	18.53	PASS
Band4	1.4MHz	16QAM	20393	3RB#1	18.55	PASS
Band4	1.4MHz	16QAM	20393	3RB#3	18.54	PASS
Band4	1.4MHz	16QAM	20393	6RB#0	18.73	PASS
Band4	3MHz	QPSK	19965	1RB#0	18.97	PASS
Band4	3MHz	QPSK	19965	1RB#8	18.97	PASS
Band4	3MHz	QPSK	19965	1RB#14	18.92	PASS
Band4	3MHz	QPSK	19965	8RB#0	19.01	PASS
Band4	3MHz	QPSK	19965	8RB#4	19.02	PASS
Band4	3MHz	QPSK	19965	8RB#7	19.00	PASS
Band4	3MHz	QPSK	19965	15RB#0	18.99	PASS
Band4	3MHz	QPSK	20175	1RB#0	18.57	PASS
Band4	3MHz	QPSK	20175	1RB#8	18.58	PASS
Band4	3MHz	QPSK	20175	1RB#14	18.57	PASS
Band4	3MHz	QPSK	20175	8RB#0	18.61	PASS
Band4	3MHz	QPSK	20175	8RB#4	18.61	PASS
Band4	3MHz	QPSK	20175	8RB#7	18.56	PASS
Band4	3MHz	QPSK	20175	15RB#0	18.62	PASS
Band4	3MHz	QPSK	20385	1RB#0	18.78	PASS
Band4	3MHz	QPSK	20385	1RB#8	18.74	PASS
Band4	3MHz	QPSK	20385	1RB#14	18.68	PASS
Band4	3MHz	QPSK	20385	8RB#0	18.74	PASS
Band4	3MHz	QPSK	20385	8RB#4	18.72	PASS
Band4	3MHz	QPSK	20385	8RB#7	18.66	PASS
Band4	3MHz	QPSK	20385	15RB#0	18.74	PASS
Band4	3MHz	16QAM	19965	1RB#0	18.10	PASS
Band4	3MHz	16QAM	19965	1RB#8	18.09	PASS
Band4	3MHz	16QAM	19965	1RB#14	18.06	PASS
Band4	3MHz	16QAM	19965	8RB#0	18.09	PASS
Band4	3MHz	16QAM	19965	8RB#4	18.09	PASS
Band4	3MHz	16QAM	19965	8RB#7	18.05	PASS
Band4	3MHz	16QAM	19965	15RB#0	18.83	PASS
Band4	3MHz	16QAM	20175	1RB#0	18.73	PASS

Band4	3MHz	16QAM	20175	1RB#8	18.73	PASS
Band4	3MHz	16QAM	20175	1RB#14	18.72	PASS
Band4	3MHz	16QAM	20175	8RB#0	18.71	PASS
Band4	3MHz	16QAM	20175	8RB#4	18.68	PASS
Band4	3MHz	16QAM	20175	8RB#7	18.65	PASS
Band4	3MHz	16QAM	20175	15RB#0	18.61	PASS
Band4	3MHz	16QAM	20385	1RB#0	18.04	PASS
Band4	3MHz	16QAM	20385	1RB#8	18.91	PASS
Band4	3MHz	16QAM	20385	1RB#14	18.85	PASS
Band4	3MHz	16QAM	20385	8RB#0	18.80	PASS
Band4	3MHz	16QAM	20385	8RB#4	18.80	PASS
Band4	3MHz	16QAM	20385	8RB#7	18.75	PASS
Band4	3MHz	16QAM	20385	15RB#0	18.72	PASS
Band4	5MHz	QPSK	19975	1RB#0	19.15	PASS
Band4	5MHz	QPSK	19975	1RB#12	19.07	PASS
Band4	5MHz	QPSK	19975	1RB#24	19.08	PASS
Band4	5MHz	QPSK	19975	12RB#0	19.00	PASS
Band4	5MHz	QPSK	19975	12RB#6	19.05	PASS
Band4	5MHz	QPSK	19975	12RB#13	18.96	PASS
Band4	5MHz	QPSK	19975	25RB#0	19.02	PASS
Band4	5MHz	QPSK	20175	1RB#0	18.73	PASS
Band4	5MHz	QPSK	20175	1RB#12	18.76	PASS
Band4	5MHz	QPSK	20175	1RB#24	18.73	PASS
Band4	5MHz	QPSK	20175	12RB#0	18.65	PASS
Band4	5MHz	QPSK	20175	12RB#6	18.67	PASS
Band4	5MHz	QPSK	20175	12RB#13	18.57	PASS
Band4	5MHz	QPSK	20175	25RB#0	18.59	PASS
Band4	5MHz	QPSK	20375	1RB#0	18.94	PASS
Band4	5MHz	QPSK	20375	1RB#12	18.79	PASS
Band4	5MHz	QPSK	20375	1RB#24	18.81	PASS
Band4	5MHz	QPSK	20375	12RB#0	18.81	PASS
Band4	5MHz	QPSK	20375	12RB#6	18.86	PASS
Band4	5MHz	QPSK	20375	12RB#13	18.70	PASS
Band4	5MHz	QPSK	20375	25RB#0	18.79	PASS
Band4	5MHz	16QAM	19975	1RB#0	19.11	PASS
Band4	5MHz	16QAM	19975	1RB#12	19.05	PASS
Band4	5MHz	16QAM	19975	1RB#24	19.04	PASS

Band4	5MHz	16QAM	19975	12RB#0	18.99	PASS
Band4	5MHz	16QAM	19975	12RB#6	18.01	PASS
Band4	5MHz	16QAM	19975	12RB#13	18.99	PASS
Band4	5MHz	16QAM	19975	25RB#0	18.01	PASS
Band4	5MHz	16QAM	20175	1RB#0	18.68	PASS
Band4	5MHz	16QAM	20175	1RB#12	18.69	PASS
Band4	5MHz	16QAM	20175	1RB#24	18.71	PASS
Band4	5MHz	16QAM	20175	12RB#0	18.67	PASS
Band4	5MHz	16QAM	20175	12RB#6	18.65	PASS
Band4	5MHz	16QAM	20175	12RB#13	18.55	PASS
Band4	5MHz	16QAM	20175	25RB#0	18.63	PASS
Band4	5MHz	16QAM	20375	1RB#0	18.10	PASS
Band4	5MHz	16QAM	20375	1RB#12	18.04	PASS
Band4	5MHz	16QAM	20375	1RB#24	18.01	PASS
Band4	5MHz	16QAM	20375	12RB#0	18.86	PASS
Band4	5MHz	16QAM	20375	12RB#6	18.86	PASS
Band4	5MHz	16QAM	20375	12RB#13	18.71	PASS
Band4	5MHz	16QAM	20375	25RB#0	18.79	PASS
Band4	10MHz	QPSK	20000	1RB#0	19.00	PASS
Band4	10MHz	QPSK	20000	1RB#24	19.01	PASS
Band4	10MHz	QPSK	20000	1RB#49	18.77	PASS
Band4	10MHz	QPSK	20000	25RB#0	18.94	PASS
Band4	10MHz	QPSK	20000	25RB#12	18.95	PASS
Band4	10MHz	QPSK	20000	25RB#25	18.91	PASS
Band4	10MHz	QPSK	20000	50RB#0	18.95	PASS
Band4	10MHz	QPSK	20175	1RB#0	18.54	PASS
Band4	10MHz	QPSK	20175	1RB#24	18.67	PASS
Band4	10MHz	QPSK	20175	1RB#49	18.68	PASS
Band4	10MHz	QPSK	20175	25RB#0	18.67	PASS
Band4	10MHz	QPSK	20175	25RB#12	18.67	PASS
Band4	10MHz	QPSK	20175	25RB#25	18.56	PASS
Band4	10MHz	QPSK	20175	50RB#0	18.65	PASS
Band4	10MHz	QPSK	20350	1RB#0	18.92	PASS
Band4	10MHz	QPSK	20350	1RB#24	18.82	PASS
Band4	10MHz	QPSK	20350	1RB#49	18.70	PASS
Band4	10MHz	QPSK	20350	25RB#0	18.85	PASS
Band4	10MHz	QPSK	20350	25RB#12	18.85	PASS

Band4	10MHz	QPSK	20350	25RB#25	18.79	PASS
Band4	10MHz	QPSK	20350	50RB#0	18.80	PASS
Band4	10MHz	16QAM	20000	1RB#0	19.17	PASS
Band4	10MHz	16QAM	20000	1RB#24	19.14	PASS
Band4	10MHz	16QAM	20000	1RB#49	18.93	PASS
Band4	10MHz	16QAM	20000	25RB#0	18.96	PASS
Band4	10MHz	16QAM	20000	25RB#12	18.97	PASS
Band4	10MHz	16QAM	20000	25RB#25	18.92	PASS
Band4	10MHz	16QAM	20000	50RB#0	18.92	PASS
Band4	10MHz	16QAM	20175	1RB#0	18.09	PASS
Band4	10MHz	16QAM	20175	1RB#24	18.86	PASS
Band4	10MHz	16QAM	20175	1RB#49	18.86	PASS
Band4	10MHz	16QAM	20175	25RB#0	18.66	PASS
Band4	10MHz	16QAM	20175	25RB#12	18.64	PASS
Band4	10MHz	16QAM	20175	25RB#25	18.56	PASS
Band4	10MHz	16QAM	20175	50RB#0	18.60	PASS
Band4	10MHz	16QAM	20350	1RB#0	18.07	PASS
Band4	10MHz	16QAM	20350	1RB#24	18.05	PASS
Band4	10MHz	16QAM	20350	1RB#49	18.88	PASS
Band4	10MHz	16QAM	20350	25RB#0	18.87	PASS
Band4	10MHz	16QAM	20350	25RB#12	18.86	PASS
Band4	10MHz	16QAM	20350	25RB#25	18.84	PASS
Band4	10MHz	16QAM	20350	50RB#0	18.83	PASS
Band4	15MHz	QPSK	20025	1RB#0	19.17	PASS
Band4	15MHz	QPSK	20025	1RB#38	19.06	PASS
Band4	15MHz	QPSK	20025	1RB#74	18.53	PASS
Band4	15MHz	QPSK	20025	38RB#0	18.83	PASS
Band4	15MHz	QPSK	20025	38RB#18	18.87	PASS
Band4	15MHz	QPSK	20025	38RB#37	18.88	PASS
Band4	15MHz	QPSK	20025	75RB#0	18.86	PASS
Band4	15MHz	QPSK	20175	1RB#0	18.49	PASS
Band4	15MHz	QPSK	20175	1RB#38	18.63	PASS
Band4	15MHz	QPSK	20175	1RB#74	18.66	PASS
Band4	15MHz	QPSK	20175	38RB#0	18.58	PASS
Band4	15MHz	QPSK	20175	38RB#18	18.60	PASS
Band4	15MHz	QPSK	20175	38RB#37	18.60	PASS
Band4	15MHz	QPSK	20175	75RB#0	18.61	PASS

Band4	15MHz	QPSK	20325	1RB#0	19.01	PASS
Band4	15MHz	QPSK	20325	1RB#38	18.99	PASS
Band4	15MHz	QPSK	20325	1RB#74	18.76	PASS
Band4	15MHz	QPSK	20325	38RB#0	19.03	PASS
Band4	15MHz	QPSK	20325	38RB#18	19.02	PASS
Band4	15MHz	QPSK	20325	38RB#37	19.04	PASS
Band4	15MHz	QPSK	20325	75RB#0	19.04	PASS
Band4	15MHz	16QAM	20025	1RB#0	19.14	PASS
Band4	15MHz	16QAM	20025	1RB#38	18.97	PASS
Band4	15MHz	16QAM	20025	1RB#74	18.73	PASS
Band4	15MHz	16QAM	20025	38RB#0	18.87	PASS
Band4	15MHz	16QAM	20025	38RB#18	18.85	PASS
Band4	15MHz	16QAM	20025	38RB#37	18.85	PASS
Band4	15MHz	16QAM	20025	75RB#0	18.82	PASS
Band4	15MHz	16QAM	20175	1RB#0	18.64	PASS
Band4	15MHz	16QAM	20175	1RB#38	18.90	PASS
Band4	15MHz	16QAM	20175	1RB#74	18.87	PASS
Band4	15MHz	16QAM	20175	38RB#0	18.59	PASS
Band4	15MHz	16QAM	20175	38RB#18	18.60	PASS
Band4	15MHz	16QAM	20175	38RB#37	18.61	PASS
Band4	15MHz	16QAM	20175	75RB#0	18.56	PASS
Band4	15MHz	16QAM	20325	1RB#0	19.20	PASS
Band4	15MHz	16QAM	20325	1RB#38	19.20	PASS
Band4	15MHz	16QAM	20325	1RB#74	18.96	PASS
Band4	15MHz	16QAM	20325	38RB#0	19.05	PASS
Band4	15MHz	16QAM	20325	38RB#18	19.04	PASS
Band4	15MHz	16QAM	20325	38RB#37	19.04	PASS
Band4	15MHz	16QAM	20325	75RB#0	18.98	PASS
Band4	20MHz	QPSK	20050	1RB#0	18.94	PASS
Band4	20MHz	QPSK	20050	1RB#49	18.75	PASS
Band4	20MHz	QPSK	20050	1RB#99	18.51	PASS
Band4	20MHz	QPSK	20050	50RB#0	18.73	PASS
Band4	20MHz	QPSK	20050	50RB#25	18.77	PASS
Band4	20MHz	QPSK	20050	50RB#50	18.52	PASS
Band4	20MHz	QPSK	20050	100RB#0	18.66	PASS
Band4	20MHz	QPSK	20175	1RB#0	18.67	PASS
Band4	20MHz	QPSK	20175	1RB#49	18.79	PASS

Band4	20MHz	QPSK	20175	1RB#99	18.83	PASS
Band4	20MHz	QPSK	20175	50RB#0	18.68	PASS
Band4	20MHz	QPSK	20175	50RB#25	18.69	PASS
Band4	20MHz	QPSK	20175	50RB#50	18.60	PASS
Band4	20MHz	QPSK	20175	100RB#0	18.69	PASS
Band4	20MHz	QPSK	20300	1RB#0	18.00	PASS
Band4	20MHz	QPSK	20300	1RB#49	18.14	PASS
Band4	20MHz	QPSK	20300	1RB#99	18.94	PASS
Band4	20MHz	QPSK	20300	50RB#0	18.12	PASS
Band4	20MHz	QPSK	20300	50RB#25	18.13	PASS
Band4	20MHz	QPSK	20300	50RB#50	19.86	PASS
Band4	20MHz	QPSK	20300	100RB#0	18.12	PASS
Band4	20MHz	16QAM	20050	1RB#0	18.95	PASS
Band4	20MHz	16QAM	20050	1RB#49	18.78	PASS
Band4	20MHz	16QAM	20050	1RB#99	18.50	PASS
Band4	20MHz	16QAM	20050	50RB#0	18.73	PASS
Band4	20MHz	16QAM	20050	50RB#25	18.73	PASS
Band4	20MHz	16QAM	20050	50RB#50	18.51	PASS
Band4	20MHz	16QAM	20050	100RB#0	18.60	PASS
Band4	20MHz	16QAM	20175	1RB#0	18.70	PASS
Band4	20MHz	16QAM	20175	1RB#49	18.80	PASS
Band4	20MHz	16QAM	20175	1RB#99	18.87	PASS
Band4	20MHz	16QAM	20175	50RB#0	18.65	PASS
Band4	20MHz	16QAM	20175	50RB#25	18.66	PASS
Band4	20MHz	16QAM	20175	50RB#50	18.55	PASS
Band4	20MHz	16QAM	20175	100RB#0	18.62	PASS
Band4	20MHz	16QAM	20300	1RB#0	18.01	PASS
Band4	20MHz	16QAM	20300	1RB#49	18.20	PASS
Band4	20MHz	16QAM	20300	1RB#99	18.92	PASS
Band4	20MHz	16QAM	20300	50RB#0	18.14	PASS
Band4	20MHz	16QAM	20300	50RB#25	18.12	PASS
Band4	20MHz	16QAM	20300	50RB#50	18.07	PASS
Band4	20MHz	16QAM	20300	100RB#0	18.12	PASS

LTE(P2): Receiver ON

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Verdict
Band4	1.4MHz	QPSK	19957	1RB#0	13.79	PASS
Band4	1.4MHz	QPSK	19957	1RB#2	13.75	PASS
Band4	1.4MHz	QPSK	19957	1RB#5	13.78	PASS
Band4	1.4MHz	QPSK	19957	3RB#0	13.75	PASS
Band4	1.4MHz	QPSK	19957	3RB#1	13.73	PASS
Band4	1.4MHz	QPSK	19957	3RB#3	13.77	PASS
Band4	1.4MHz	QPSK	19957	6RB#0	13.75	PASS
Band4	1.4MHz	QPSK	20175	1RB#0	13.36	PASS
Band4	1.4MHz	QPSK	20175	1RB#2	13.37	PASS
Band4	1.4MHz	QPSK	20175	1RB#5	13.37	PASS
Band4	1.4MHz	QPSK	20175	3RB#0	13.33	PASS
Band4	1.4MHz	QPSK	20175	3RB#1	13.34	PASS
Band4	1.4MHz	QPSK	20175	3RB#3	13.35	PASS
Band4	1.4MHz	QPSK	20175	6RB#0	13.39	PASS
Band4	1.4MHz	QPSK	20393	1RB#0	13.53	PASS
Band4	1.4MHz	QPSK	20393	1RB#2	13.50	PASS
Band4	1.4MHz	QPSK	20393	1RB#5	13.49	PASS
Band4	1.4MHz	QPSK	20393	3RB#0	13.48	PASS
Band4	1.4MHz	QPSK	20393	3RB#1	13.48	PASS
Band4	1.4MHz	QPSK	20393	3RB#3	13.47	PASS
Band4	1.4MHz	QPSK	20393	6RB#0	13.46	PASS
Band4	1.4MHz	16QAM	19957	1RB#0	13.92	PASS
Band4	1.4MHz	16QAM	19957	1RB#2	13.95	PASS
Band4	1.4MHz	16QAM	19957	1RB#5	13.93	PASS
Band4	1.4MHz	16QAM	19957	3RB#0	13.67	PASS
Band4	1.4MHz	16QAM	19957	3RB#1	13.67	PASS
Band4	1.4MHz	16QAM	19957	3RB#3	13.66	PASS
Band4	1.4MHz	16QAM	19957	6RB#0	13.63	PASS
Band4	1.4MHz	16QAM	20175	1RB#0	13.50	PASS
Band4	1.4MHz	16QAM	20175	1RB#2	13.54	PASS
Band4	1.4MHz	16QAM	20175	1RB#5	13.51	PASS
Band4	1.4MHz	16QAM	20175	3RB#0	13.28	PASS
Band4	1.4MHz	16QAM	20175	3RB#1	13.27	PASS
Band4	1.4MHz	16QAM	20175	3RB#3	13.25	PASS

Band4	1.4MHz	16QAM	20175	6RB#0	13.23	PASS
Band4	1.4MHz	16QAM	20393	1RB#0	13.40	PASS
Band4	1.4MHz	16QAM	20393	1RB#2	13.40	PASS
Band4	1.4MHz	16QAM	20393	1RB#5	13.34	PASS
Band4	1.4MHz	16QAM	20393	3RB#0	13.34	PASS
Band4	1.4MHz	16QAM	20393	3RB#1	13.34	PASS
Band4	1.4MHz	16QAM	20393	3RB#3	13.27	PASS
Band4	1.4MHz	16QAM	20393	6RB#0	13.48	PASS
Band4	3MHz	QPSK	19965	1RB#0	13.74	PASS
Band4	3MHz	QPSK	19965	1RB#8	13.76	PASS
Band4	3MHz	QPSK	19965	1RB#14	13.70	PASS
Band4	3MHz	QPSK	19965	8RB#0	13.76	PASS
Band4	3MHz	QPSK	19965	8RB#4	13.79	PASS
Band4	3MHz	QPSK	19965	8RB#7	13.78	PASS
Band4	3MHz	QPSK	19965	15RB#0	13.78	PASS
Band4	3MHz	QPSK	20175	1RB#0	13.31	PASS
Band4	3MHz	QPSK	20175	1RB#8	13.33	PASS
Band4	3MHz	QPSK	20175	1RB#14	13.31	PASS
Band4	3MHz	QPSK	20175	8RB#0	13.36	PASS
Band4	3MHz	QPSK	20175	8RB#4	13.37	PASS
Band4	3MHz	QPSK	20175	8RB#7	13.31	PASS
Band4	3MHz	QPSK	20175	15RB#0	13.36	PASS
Band4	3MHz	QPSK	20385	1RB#0	13.61	PASS
Band4	3MHz	QPSK	20385	1RB#8	13.50	PASS
Band4	3MHz	QPSK	20385	1RB#14	13.50	PASS
Band4	3MHz	QPSK	20385	8RB#0	13.51	PASS
Band4	3MHz	QPSK	20385	8RB#4	13.49	PASS
Band4	3MHz	QPSK	20385	8RB#7	13.46	PASS
Band4	3MHz	QPSK	20385	15RB#0	13.52	PASS
Band4	3MHz	16QAM	19965	1RB#0	13.92	PASS
Band4	3MHz	16QAM	19965	1RB#8	13.91	PASS
Band4	3MHz	16QAM	19965	1RB#14	13.86	PASS
Band4	3MHz	16QAM	19965	8RB#0	13.86	PASS
Band4	3MHz	16QAM	19965	8RB#4	13.83	PASS
Band4	3MHz	16QAM	19965	8RB#7	13.82	PASS
Band4	3MHz	16QAM	19965	15RB#0	13.79	PASS
Band4	3MHz	16QAM	20175	1RB#0	13.48	PASS

Band4	3MHz	16QAM	20175	1RB#8	13.51	PASS
Band4	3MHz	16QAM	20175	1RB#14	13.51	PASS
Band4	3MHz	16QAM	20175	8RB#0	13.43	PASS
Band4	3MHz	16QAM	20175	8RB#4	13.43	PASS
Band4	3MHz	16QAM	20175	8RB#7	13.40	PASS
Band4	3MHz	16QAM	20175	15RB#0	13.36	PASS
Band4	3MHz	16QAM	20385	1RB#0	13.76	PASS
Band4	3MHz	16QAM	20385	1RB#8	13.64	PASS
Band4	3MHz	16QAM	20385	1RB#14	13.62	PASS
Band4	3MHz	16QAM	20385	8RB#0	13.55	PASS
Band4	3MHz	16QAM	20385	8RB#4	13.55	PASS
Band4	3MHz	16QAM	20385	8RB#7	13.53	PASS
Band4	3MHz	16QAM	20385	15RB#0	13.46	PASS
Band4	5MHz	QPSK	19975	1RB#0	13.90	PASS
Band4	5MHz	QPSK	19975	1RB#12	13.83	PASS
Band4	5MHz	QPSK	19975	1RB#24	13.84	PASS
Band4	5MHz	QPSK	19975	12RB#0	13.80	PASS
Band4	5MHz	QPSK	19975	12RB#6	13.79	PASS
Band4	5MHz	QPSK	19975	12RB#13	13.79	PASS
Band4	5MHz	QPSK	19975	25RB#0	13.80	PASS
Band4	5MHz	QPSK	20175	1RB#0	13.44	PASS
Band4	5MHz	QPSK	20175	1RB#12	13.45	PASS
Band4	5MHz	QPSK	20175	1RB#24	13.48	PASS
Band4	5MHz	QPSK	20175	12RB#0	13.41	PASS
Band4	5MHz	QPSK	20175	12RB#6	13.44	PASS
Band4	5MHz	QPSK	20175	12RB#13	13.32	PASS
Band4	5MHz	QPSK	20175	25RB#0	13.32	PASS
Band4	5MHz	QPSK	20375	1RB#0	13.68	PASS
Band4	5MHz	QPSK	20375	1RB#12	13.60	PASS
Band4	5MHz	QPSK	20375	1RB#24	13.57	PASS
Band4	5MHz	QPSK	20375	12RB#0	13.61	PASS
Band4	5MHz	QPSK	20375	12RB#6	13.60	PASS
Band4	5MHz	QPSK	20375	12RB#13	13.46	PASS
Band4	5MHz	QPSK	20375	25RB#0	13.55	PASS
Band4	5MHz	16QAM	19975	1RB#0	13.85	PASS
Band4	5MHz	16QAM	19975	1RB#12	13.81	PASS
Band4	5MHz	16QAM	19975	1RB#24	13.82	PASS

Band4	5MHz	16QAM	19975	12RB#0	13.77	PASS
Band4	5MHz	16QAM	19975	12RB#6	13.77	PASS
Band4	5MHz	16QAM	19975	12RB#13	13.80	PASS
Band4	5MHz	16QAM	19975	25RB#0	13.81	PASS
Band4	5MHz	16QAM	20175	1RB#0	13.42	PASS
Band4	5MHz	16QAM	20175	1RB#12	13.42	PASS
Band4	5MHz	16QAM	20175	1RB#24	13.41	PASS
Band4	5MHz	16QAM	20175	12RB#0	13.38	PASS
Band4	5MHz	16QAM	20175	12RB#6	13.38	PASS
Band4	5MHz	16QAM	20175	12RB#13	13.30	PASS
Band4	5MHz	16QAM	20175	25RB#0	13.35	PASS
Band4	5MHz	16QAM	20375	1RB#0	13.84	PASS
Band4	5MHz	16QAM	20375	1RB#12	13.81	PASS
Band4	5MHz	16QAM	20375	1RB#24	13.81	PASS
Band4	5MHz	16QAM	20375	12RB#0	13.63	PASS
Band4	5MHz	16QAM	20375	12RB#6	13.60	PASS
Band4	5MHz	16QAM	20375	12RB#13	13.52	PASS
Band4	5MHz	16QAM	20375	25RB#0	13.53	PASS
Band4	10MHz	QPSK	20000	1RB#0	13.79	PASS
Band4	10MHz	QPSK	20000	1RB#24	13.74	PASS
Band4	10MHz	QPSK	20000	1RB#49	13.51	PASS
Band4	10MHz	QPSK	20000	25RB#0	13.74	PASS
Band4	10MHz	QPSK	20000	25RB#12	13.70	PASS
Band4	10MHz	QPSK	20000	25RB#25	13.72	PASS
Band4	10MHz	QPSK	20000	50RB#0	13.76	PASS
Band4	10MHz	QPSK	20175	1RB#0	13.32	PASS
Band4	10MHz	QPSK	20175	1RB#24	13.41	PASS
Band4	10MHz	QPSK	20175	1RB#49	13.42	PASS
Band4	10MHz	QPSK	20175	25RB#0	13.43	PASS
Band4	10MHz	QPSK	20175	25RB#12	13.42	PASS
Band4	10MHz	QPSK	20175	25RB#25	13.31	PASS
Band4	10MHz	QPSK	20175	50RB#0	13.39	PASS
Band4	10MHz	QPSK	20350	1RB#0	13.65	PASS
Band4	10MHz	QPSK	20350	1RB#24	13.62	PASS
Band4	10MHz	QPSK	20350	1RB#49	13.46	PASS
Band4	10MHz	QPSK	20350	25RB#0	13.59	PASS
Band4	10MHz	QPSK	20350	25RB#12	13.59	PASS

Band4	10MHz	QPSK	20350	25RB#25	13.56	PASS
Band4	10MHz	QPSK	20350	50RB#0	13.57	PASS
Band4	10MHz	16QAM	20000	1RB#0	13.95	PASS
Band4	10MHz	16QAM	20000	1RB#24	13.91	PASS
Band4	10MHz	16QAM	20000	1RB#49	13.70	PASS
Band4	10MHz	16QAM	20000	25RB#0	13.72	PASS
Band4	10MHz	16QAM	20000	25RB#12	13.74	PASS
Band4	10MHz	16QAM	20000	25RB#25	13.71	PASS
Band4	10MHz	16QAM	20000	50RB#0	13.73	PASS
Band4	10MHz	16QAM	20175	1RB#0	13.49	PASS
Band4	10MHz	16QAM	20175	1RB#24	13.58	PASS
Band4	10MHz	16QAM	20175	1RB#49	13.57	PASS
Band4	10MHz	16QAM	20175	25RB#0	13.40	PASS
Band4	10MHz	16QAM	20175	25RB#12	13.40	PASS
Band4	10MHz	16QAM	20175	25RB#25	13.29	PASS
Band4	10MHz	16QAM	20175	50RB#0	13.31	PASS
Band4	10MHz	16QAM	20350	1RB#0	13.74	PASS
Band4	10MHz	16QAM	20350	1RB#24	13.77	PASS
Band4	10MHz	16QAM	20350	1RB#49	13.60	PASS
Band4	10MHz	16QAM	20350	25RB#0	13.62	PASS
Band4	10MHz	16QAM	20350	25RB#12	13.61	PASS
Band4	10MHz	16QAM	20350	25RB#25	13.59	PASS
Band4	10MHz	16QAM	20350	50RB#0	13.57	PASS
Band4	15MHz	QPSK	20025	1RB#0	13.79	PASS
Band4	15MHz	QPSK	20025	1RB#38	13.62	PASS
Band4	15MHz	QPSK	20025	1RB#74	13.29	PASS
Band4	15MHz	QPSK	20025	38RB#0	13.66	PASS
Band4	15MHz	QPSK	20025	38RB#18	13.65	PASS
Band4	15MHz	QPSK	20025	38RB#37	13.65	PASS
Band4	15MHz	QPSK	20025	75RB#0	13.66	PASS
Band4	15MHz	QPSK	20175	1RB#0	13.27	PASS
Band4	15MHz	QPSK	20175	1RB#38	13.38	PASS
Band4	15MHz	QPSK	20175	1RB#74	13.44	PASS
Band4	15MHz	QPSK	20175	38RB#0	13.35	PASS
Band4	15MHz	QPSK	20175	38RB#18	13.35	PASS
Band4	15MHz	QPSK	20175	38RB#37	13.37	PASS
Band4	15MHz	QPSK	20175	75RB#0	13.36	PASS

Band4	15MHz	QPSK	20325	1RB#0	13.75	PASS
Band4	15MHz	QPSK	20325	1RB#38	13.77	PASS
Band4	15MHz	QPSK	20325	1RB#74	13.55	PASS
Band4	15MHz	QPSK	20325	38RB#0	13.82	PASS
Band4	15MHz	QPSK	20325	38RB#18	13.81	PASS
Band4	15MHz	QPSK	20325	38RB#37	13.80	PASS
Band4	15MHz	QPSK	20325	75RB#0	13.80	PASS
Band4	15MHz	16QAM	20025	1RB#0	13.94	PASS
Band4	15MHz	16QAM	20025	1RB#38	13.80	PASS
Band4	15MHz	16QAM	20025	1RB#74	13.51	PASS
Band4	15MHz	16QAM	20025	38RB#0	13.64	PASS
Band4	15MHz	16QAM	20025	38RB#18	13.65	PASS
Band4	15MHz	16QAM	20025	38RB#37	13.66	PASS
Band4	15MHz	16QAM	20025	75RB#0	13.57	PASS
Band4	15MHz	16QAM	20175	1RB#0	13.44	PASS
Band4	15MHz	16QAM	20175	1RB#38	13.56	PASS
Band4	15MHz	16QAM	20175	1RB#74	13.58	PASS
Band4	15MHz	16QAM	20175	38RB#0	13.35	PASS
Band4	15MHz	16QAM	20175	38RB#18	13.37	PASS
Band4	15MHz	16QAM	20175	38RB#37	13.37	PASS
Band4	15MHz	16QAM	20175	75RB#0	13.33	PASS
Band4	15MHz	16QAM	20325	1RB#0	13.95	PASS
Band4	15MHz	16QAM	20325	1RB#38	13.92	PASS
Band4	15MHz	16QAM	20325	1RB#74	13.75	PASS
Band4	15MHz	16QAM	20325	38RB#0	13.82	PASS
Band4	15MHz	16QAM	20325	38RB#18	13.80	PASS
Band4	15MHz	16QAM	20325	38RB#37	13.80	PASS
Band4	15MHz	16QAM	20325	75RB#0	13.77	PASS
Band4	20MHz	QPSK	20050	1RB#0	13.72	PASS
Band4	20MHz	QPSK	20050	1RB#49	13.53	PASS
Band4	20MHz	QPSK	20050	1RB#99	13.29	PASS
Band4	20MHz	QPSK	20050	50RB#0	13.58	PASS
Band4	20MHz	QPSK	20050	50RB#25	13.57	PASS
Band4	20MHz	QPSK	20050	50RB#50	13.28	PASS
Band4	20MHz	QPSK	20050	100RB#0	13.41	PASS
Band4	20MHz	QPSK	20175	1RB#0	13.44	PASS
Band4	20MHz	QPSK	20175	1RB#49	13.54	PASS

Band4	20MHz	QPSK	20175	1RB#99	13.58	PASS
Band4	20MHz	QPSK	20175	50RB#0	13.44	PASS
Band4	20MHz	QPSK	20175	50RB#25	13.44	PASS
Band4	20MHz	QPSK	20175	50RB#50	13.30	PASS
Band4	20MHz	QPSK	20175	100RB#0	13.38	PASS
Band4	20MHz	QPSK	20300	1RB#0	13.70	PASS
Band4	20MHz	QPSK	20300	1RB#49	13.98	PASS
Band4	20MHz	QPSK	20300	1RB#99	13.74	PASS
Band4	20MHz	QPSK	20300	50RB#0	13.88	PASS
Band4	20MHz	QPSK	20300	50RB#25	13.87	PASS
Band4	20MHz	QPSK	20300	50RB#50	13.85	PASS
Band4	20MHz	QPSK	20300	100RB#0	13.84	PASS
Band4	20MHz	16QAM	20050	1RB#0	13.74	PASS
Band4	20MHz	16QAM	20050	1RB#49	13.53	PASS
Band4	20MHz	16QAM	20050	1RB#99	13.24	PASS
Band4	20MHz	16QAM	20050	50RB#0	13.56	PASS
Band4	20MHz	16QAM	20050	50RB#25	13.55	PASS
Band4	20MHz	16QAM	20050	50RB#50	13.25	PASS
Band4	20MHz	16QAM	20050	100RB#0	13.38	PASS
Band4	20MHz	16QAM	20175	1RB#0	13.43	PASS
Band4	20MHz	16QAM	20175	1RB#49	13.55	PASS
Band4	20MHz	16QAM	20175	1RB#99	13.61	PASS
Band4	20MHz	16QAM	20175	50RB#0	13.42	PASS
Band4	20MHz	16QAM	20175	50RB#25	13.43	PASS
Band4	20MHz	16QAM	20175	50RB#50	13.36	PASS
Band4	20MHz	16QAM	20175	100RB#0	13.37	PASS
Band4	20MHz	16QAM	20300	1RB#0	13.75	PASS
Band4	20MHz	16QAM	20300	1RB#49	13.93	PASS
Band4	20MHz	16QAM	20300	1RB#99	13.71	PASS
Band4	20MHz	16QAM	20300	50RB#0	13.85	PASS
Band4	20MHz	16QAM	20300	50RB#25	13.87	PASS
Band4	20MHz	16QAM	20300	50RB#50	13.84	PASS
Band4	20MHz	16QAM	20300	100RB#0	13.78	PASS

LTE(P3): Hotspot ON

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Verdict
Band4	1.4MHz	QPSK	19957	1RB#0	18.93	PASS
Band4	1.4MHz	QPSK	19957	1RB#2	18.92	PASS
Band4	1.4MHz	QPSK	19957	1RB#5	18.90	PASS
Band4	1.4MHz	QPSK	19957	3RB#0	18.94	PASS
Band4	1.4MHz	QPSK	19957	3RB#1	18.93	PASS
Band4	1.4MHz	QPSK	19957	3RB#3	18.90	PASS
Band4	1.4MHz	QPSK	19957	6RB#0	18.96	PASS
Band4	1.4MHz	QPSK	20175	1RB#0	18.57	PASS
Band4	1.4MHz	QPSK	20175	1RB#2	18.56	PASS
Band4	1.4MHz	QPSK	20175	1RB#5	18.57	PASS
Band4	1.4MHz	QPSK	20175	3RB#0	18.60	PASS
Band4	1.4MHz	QPSK	20175	3RB#1	18.57	PASS
Band4	1.4MHz	QPSK	20175	3RB#3	18.55	PASS
Band4	1.4MHz	QPSK	20175	6RB#0	18.63	PASS
Band4	1.4MHz	QPSK	20393	1RB#0	18.71	PASS
Band4	1.4MHz	QPSK	20393	1RB#2	18.67	PASS
Band4	1.4MHz	QPSK	20393	1RB#5	18.68	PASS
Band4	1.4MHz	QPSK	20393	3RB#0	18.65	PASS
Band4	1.4MHz	QPSK	20393	3RB#1	18.63	PASS
Band4	1.4MHz	QPSK	20393	3RB#3	18.63	PASS
Band4	1.4MHz	QPSK	20393	6RB#0	18.68	PASS
Band4	1.4MHz	16QAM	19957	1RB#0	19.15	PASS
Band4	1.4MHz	16QAM	19957	1RB#2	19.18	PASS
Band4	1.4MHz	16QAM	19957	1RB#5	19.11	PASS
Band4	1.4MHz	16QAM	19957	3RB#0	18.81	PASS
Band4	1.4MHz	16QAM	19957	3RB#1	18.81	PASS
Band4	1.4MHz	16QAM	19957	3RB#3	18.76	PASS
Band4	1.4MHz	16QAM	19957	6RB#0	18.94	PASS
Band4	1.4MHz	16QAM	20175	1RB#0	18.85	PASS
Band4	1.4MHz	16QAM	20175	1RB#2	18.88	PASS
Band4	1.4MHz	16QAM	20175	1RB#5	18.76	PASS
Band4	1.4MHz	16QAM	20175	3RB#0	18.46	PASS
Band4	1.4MHz	16QAM	20175	3RB#1	18.46	PASS
Band4	1.4MHz	16QAM	20175	3RB#3	18.39	PASS

Band4	1.4MHz	16QAM	20175	6RB#0	18.62	PASS
Band4	1.4MHz	16QAM	20393	1RB#0	18.65	PASS
Band4	1.4MHz	16QAM	20393	1RB#2	18.61	PASS
Band4	1.4MHz	16QAM	20393	1RB#5	18.58	PASS
Band4	1.4MHz	16QAM	20393	3RB#0	18.47	PASS
Band4	1.4MHz	16QAM	20393	3RB#1	18.47	PASS
Band4	1.4MHz	16QAM	20393	3RB#3	18.46	PASS
Band4	1.4MHz	16QAM	20393	6RB#0	18.65	PASS
Band4	3MHz	QPSK	19965	1RB#0	18.92	PASS
Band4	3MHz	QPSK	19965	1RB#8	18.92	PASS
Band4	3MHz	QPSK	19965	1RB#14	18.88	PASS
Band4	3MHz	QPSK	19965	8RB#0	18.92	PASS
Band4	3MHz	QPSK	19965	8RB#4	18.96	PASS
Band4	3MHz	QPSK	19965	8RB#7	18.93	PASS
Band4	3MHz	QPSK	19965	15RB#0	18.95	PASS
Band4	3MHz	QPSK	20175	1RB#0	18.51	PASS
Band4	3MHz	QPSK	20175	1RB#8	18.53	PASS
Band4	3MHz	QPSK	20175	1RB#14	18.50	PASS
Band4	3MHz	QPSK	20175	8RB#0	18.58	PASS
Band4	3MHz	QPSK	20175	8RB#4	18.55	PASS
Band4	3MHz	QPSK	20175	8RB#7	18.53	PASS
Band4	3MHz	QPSK	20175	15RB#0	18.57	PASS
Band4	3MHz	QPSK	20385	1RB#0	18.79	PASS
Band4	3MHz	QPSK	20385	1RB#8	18.67	PASS
Band4	3MHz	QPSK	20385	1RB#14	18.70	PASS
Band4	3MHz	QPSK	20385	8RB#0	18.70	PASS
Band4	3MHz	QPSK	20385	8RB#4	18.72	PASS
Band4	3MHz	QPSK	20385	8RB#7	18.64	PASS
Band4	3MHz	QPSK	20385	15RB#0	18.71	PASS
Band4	3MHz	16QAM	19965	1RB#0	19.02	PASS
Band4	3MHz	16QAM	19965	1RB#8	19.03	PASS
Band4	3MHz	16QAM	19965	1RB#14	19.01	PASS
Band4	3MHz	16QAM	19965	8RB#0	19.02	PASS
Band4	3MHz	16QAM	19965	8RB#4	19.03	PASS
Band4	3MHz	16QAM	19965	8RB#7	19.00	PASS
Band4	3MHz	16QAM	19965	15RB#0	18.97	PASS
Band4	3MHz	16QAM	20175	1RB#0	18.68	PASS

Band4	3MHz	16QAM	20175	1RB#8	18.69	PASS
Band4	3MHz	16QAM	20175	1RB#14	18.69	PASS
Band4	3MHz	16QAM	20175	8RB#0	18.64	PASS
Band4	3MHz	16QAM	20175	8RB#4	18.66	PASS
Band4	3MHz	16QAM	20175	8RB#7	18.64	PASS
Band4	3MHz	16QAM	20175	15RB#0	18.54	PASS
Band4	3MHz	16QAM	20385	1RB#0	18.97	PASS
Band4	3MHz	16QAM	20385	1RB#8	18.85	PASS
Band4	3MHz	16QAM	20385	1RB#14	18.80	PASS
Band4	3MHz	16QAM	20385	8RB#0	18.75	PASS
Band4	3MHz	16QAM	20385	8RB#4	18.78	PASS
Band4	3MHz	16QAM	20385	8RB#7	18.76	PASS
Band4	3MHz	16QAM	20385	15RB#0	18.67	PASS
Band4	5MHz	QPSK	19975	1RB#0	19.11	PASS
Band4	5MHz	QPSK	19975	1RB#12	19.00	PASS
Band4	5MHz	QPSK	19975	1RB#24	19.04	PASS
Band4	5MHz	QPSK	19975	12RB#0	18.97	PASS
Band4	5MHz	QPSK	19975	12RB#6	18.94	PASS
Band4	5MHz	QPSK	19975	12RB#13	18.93	PASS
Band4	5MHz	QPSK	19975	25RB#0	18.97	PASS
Band4	5MHz	QPSK	20175	1RB#0	18.68	PASS
Band4	5MHz	QPSK	20175	1RB#12	18.72	PASS
Band4	5MHz	QPSK	20175	1RB#24	18.78	PASS
Band4	5MHz	QPSK	20175	12RB#0	18.62	PASS
Band4	5MHz	QPSK	20175	12RB#6	18.62	PASS
Band4	5MHz	QPSK	20175	12RB#13	18.52	PASS
Band4	5MHz	QPSK	20175	25RB#0	18.55	PASS
Band4	5MHz	QPSK	20375	1RB#0	18.86	PASS
Band4	5MHz	QPSK	20375	1RB#12	18.77	PASS
Band4	5MHz	QPSK	20375	1RB#24	18.78	PASS
Band4	5MHz	QPSK	20375	12RB#0	18.76	PASS
Band4	5MHz	QPSK	20375	12RB#6	18.77	PASS
Band4	5MHz	QPSK	20375	12RB#13	18.65	PASS
Band4	5MHz	QPSK	20375	25RB#0	18.74	PASS
Band4	5MHz	16QAM	19975	1RB#0	19.05	PASS
Band4	5MHz	16QAM	19975	1RB#12	19.00	PASS
Band4	5MHz	16QAM	19975	1RB#24	19.01	PASS

Band4	5MHz	16QAM	19975	12RB#0	18.95	PASS
Band4	5MHz	16QAM	19975	12RB#6	18.95	PASS
Band4	5MHz	16QAM	19975	12RB#13	18.94	PASS
Band4	5MHz	16QAM	19975	25RB#0	18.96	PASS
Band4	5MHz	16QAM	20175	1RB#0	18.65	PASS
Band4	5MHz	16QAM	20175	1RB#12	18.64	PASS
Band4	5MHz	16QAM	20175	1RB#24	18.67	PASS
Band4	5MHz	16QAM	20175	12RB#0	18.63	PASS
Band4	5MHz	16QAM	20175	12RB#6	18.67	PASS
Band4	5MHz	16QAM	20175	12RB#13	18.52	PASS
Band4	5MHz	16QAM	20175	25RB#0	18.57	PASS
Band4	5MHz	16QAM	20375	1RB#0	19.03	PASS
Band4	5MHz	16QAM	20375	1RB#12	18.97	PASS
Band4	5MHz	16QAM	20375	1RB#24	18.98	PASS
Band4	5MHz	16QAM	20375	12RB#0	18.82	PASS
Band4	5MHz	16QAM	20375	12RB#6	18.83	PASS
Band4	5MHz	16QAM	20375	12RB#13	18.69	PASS
Band4	5MHz	16QAM	20375	25RB#0	18.72	PASS
Band4	10MHz	QPSK	20000	1RB#0	18.96	PASS
Band4	10MHz	QPSK	20000	1RB#24	18.94	PASS
Band4	10MHz	QPSK	20000	1RB#49	18.73	PASS
Band4	10MHz	QPSK	20000	25RB#0	18.91	PASS
Band4	10MHz	QPSK	20000	25RB#12	18.87	PASS
Band4	10MHz	QPSK	20000	25RB#25	18.88	PASS
Band4	10MHz	QPSK	20000	50RB#0	18.92	PASS
Band4	10MHz	QPSK	20175	1RB#0	18.51	PASS
Band4	10MHz	QPSK	20175	1RB#24	18.63	PASS
Band4	10MHz	QPSK	20175	1RB#49	18.63	PASS
Band4	10MHz	QPSK	20175	25RB#0	18.63	PASS
Band4	10MHz	QPSK	20175	25RB#12	18.63	PASS
Band4	10MHz	QPSK	20175	25RB#25	18.53	PASS
Band4	10MHz	QPSK	20175	50RB#0	18.58	PASS
Band4	10MHz	QPSK	20350	1RB#0	18.86	PASS
Band4	10MHz	QPSK	20350	1RB#24	18.81	PASS
Band4	10MHz	QPSK	20350	1RB#49	18.67	PASS
Band4	10MHz	QPSK	20350	25RB#0	18.79	PASS
Band4	10MHz	QPSK	20350	25RB#12	18.78	PASS

Band4	10MHz	QPSK	20350	25RB#25	18.78	PASS
Band4	10MHz	QPSK	20350	50RB#0	18.76	PASS
Band4	10MHz	16QAM	20000	1RB#0	19.10	PASS
Band4	10MHz	16QAM	20000	1RB#24	19.09	PASS
Band4	10MHz	16QAM	20000	1RB#49	18.86	PASS
Band4	10MHz	16QAM	20000	25RB#0	18.93	PASS
Band4	10MHz	16QAM	20000	25RB#12	18.92	PASS
Band4	10MHz	16QAM	20000	25RB#25	18.89	PASS
Band4	10MHz	16QAM	20000	50RB#0	18.86	PASS
Band4	10MHz	16QAM	20175	1RB#0	18.64	PASS
Band4	10MHz	16QAM	20175	1RB#24	18.82	PASS
Band4	10MHz	16QAM	20175	1RB#49	18.83	PASS
Band4	10MHz	16QAM	20175	25RB#0	18.63	PASS
Band4	10MHz	16QAM	20175	25RB#12	18.63	PASS
Band4	10MHz	16QAM	20175	25RB#25	18.52	PASS
Band4	10MHz	16QAM	20175	50RB#0	18.56	PASS
Band4	10MHz	16QAM	20350	1RB#0	19.04	PASS
Band4	10MHz	16QAM	20350	1RB#24	19.00	PASS
Band4	10MHz	16QAM	20350	1RB#49	18.86	PASS
Band4	10MHz	16QAM	20350	25RB#0	18.82	PASS
Band4	10MHz	16QAM	20350	25RB#12	18.83	PASS
Band4	10MHz	16QAM	20350	25RB#25	18.79	PASS
Band4	10MHz	16QAM	20350	50RB#0	18.82	PASS
Band4	15MHz	QPSK	20025	1RB#0	18.94	PASS
Band4	15MHz	QPSK	20025	1RB#38	18.80	PASS
Band4	15MHz	QPSK	20025	1RB#74	18.50	PASS
Band4	15MHz	QPSK	20025	38RB#0	18.80	PASS
Band4	15MHz	QPSK	20025	38RB#18	18.85	PASS
Band4	15MHz	QPSK	20025	38RB#37	18.82	PASS
Band4	15MHz	QPSK	20025	75RB#0	18.82	PASS
Band4	15MHz	QPSK	20175	1RB#0	18.46	PASS
Band4	15MHz	QPSK	20175	1RB#38	18.59	PASS
Band4	15MHz	QPSK	20175	1RB#74	18.65	PASS
Band4	15MHz	QPSK	20175	38RB#0	18.57	PASS
Band4	15MHz	QPSK	20175	38RB#18	18.55	PASS
Band4	15MHz	QPSK	20175	38RB#37	18.57	PASS
Band4	15MHz	QPSK	20175	75RB#0	18.56	PASS

Band4	15MHz	QPSK	20325	1RB#0	18.95	PASS
Band4	15MHz	QPSK	20325	1RB#38	18.94	PASS
Band4	15MHz	QPSK	20325	1RB#74	18.75	PASS
Band4	15MHz	QPSK	20325	38RB#0	18.99	PASS
Band4	15MHz	QPSK	20325	38RB#18	18.96	PASS
Band4	15MHz	QPSK	20325	38RB#37	19.01	PASS
Band4	15MHz	QPSK	20325	75RB#0	19.01	PASS
Band4	15MHz	16QAM	20025	1RB#0	19.07	PASS
Band4	15MHz	16QAM	20025	1RB#38	18.97	PASS
Band4	15MHz	16QAM	20025	1RB#74	18.68	PASS
Band4	15MHz	16QAM	20025	38RB#0	18.84	PASS
Band4	15MHz	16QAM	20025	38RB#18	18.84	PASS
Band4	15MHz	16QAM	20025	38RB#37	18.83	PASS
Band4	15MHz	16QAM	20025	75RB#0	18.78	PASS
Band4	15MHz	16QAM	20175	1RB#0	18.66	PASS
Band4	15MHz	16QAM	20175	1RB#38	18.73	PASS
Band4	15MHz	16QAM	20175	1RB#74	18.87	PASS
Band4	15MHz	16QAM	20175	38RB#0	18.56	PASS
Band4	15MHz	16QAM	20175	38RB#18	18.56	PASS
Band4	15MHz	16QAM	20175	38RB#37	18.56	PASS
Band4	15MHz	16QAM	20175	75RB#0	18.52	PASS
Band4	15MHz	16QAM	20325	1RB#0	19.14	PASS
Band4	15MHz	16QAM	20325	1RB#38	19.14	PASS
Band4	15MHz	16QAM	20325	1RB#74	18.93	PASS
Band4	15MHz	16QAM	20325	38RB#0	19.02	PASS
Band4	15MHz	16QAM	20325	38RB#18	18.96	PASS
Band4	15MHz	16QAM	20325	38RB#37	19.01	PASS
Band4	15MHz	16QAM	20325	75RB#0	18.96	PASS
Band4	20MHz	QPSK	20050	1RB#0	18.93	PASS
Band4	20MHz	QPSK	20050	1RB#49	18.72	PASS
Band4	20MHz	QPSK	20050	1RB#99	18.48	PASS
Band4	20MHz	QPSK	20050	50RB#0	18.70	PASS
Band4	20MHz	QPSK	20050	50RB#25	18.76	PASS
Band4	20MHz	QPSK	20050	50RB#50	18.47	PASS
Band4	20MHz	QPSK	20050	100RB#0	18.58	PASS
Band4	20MHz	QPSK	20175	1RB#0	18.60	PASS
Band4	20MHz	QPSK	20175	1RB#49	18.72	PASS

Band4	20MHz	QPSK	20175	1RB#99	18.83	PASS
Band4	20MHz	QPSK	20175	50RB#0	18.68	PASS
Band4	20MHz	QPSK	20175	50RB#25	18.64	PASS
Band4	20MHz	QPSK	20175	50RB#50	18.58	PASS
Band4	20MHz	QPSK	20175	100RB#0	18.64	PASS
Band4	20MHz	QPSK	20300	1RB#0	18.92	PASS
Band4	20MHz	QPSK	20300	1RB#49	19.19	PASS
Band4	20MHz	QPSK	20300	1RB#99	18.89	PASS
Band4	20MHz	QPSK	20300	50RB#0	19.10	PASS
Band4	20MHz	QPSK	20300	50RB#25	19.07	PASS
Band4	20MHz	QPSK	20300	50RB#50	19.01	PASS
Band4	20MHz	QPSK	20300	100RB#0	19.05	PASS
Band4	20MHz	16QAM	20050	1RB#0	18.94	PASS
Band4	20MHz	16QAM	20050	1RB#49	18.73	PASS
Band4	20MHz	16QAM	20050	1RB#99	18.49	PASS
Band4	20MHz	16QAM	20050	50RB#0	18.69	PASS
Band4	20MHz	16QAM	20050	50RB#25	18.72	PASS
Band4	20MHz	16QAM	20050	50RB#50	18.50	PASS
Band4	20MHz	16QAM	20050	100RB#0	18.58	PASS
Band4	20MHz	16QAM	20175	1RB#0	18.65	PASS
Band4	20MHz	16QAM	20175	1RB#49	18.77	PASS
Band4	20MHz	16QAM	20175	1RB#99	18.83	PASS
Band4	20MHz	16QAM	20175	50RB#0	18.64	PASS
Band4	20MHz	16QAM	20175	50RB#25	18.61	PASS
Band4	20MHz	16QAM	20175	50RB#50	18.51	PASS
Band4	20MHz	16QAM	20175	100RB#0	18.57	PASS
Band4	20MHz	16QAM	20300	1RB#0	18.97	PASS
Band4	20MHz	16QAM	20300	1RB#49	19.09	PASS
Band4	20MHz	16QAM	20300	1RB#99	18.92	PASS
Band4	20MHz	16QAM	20300	50RB#0	19.06	PASS
Band4	20MHz	16QAM	20300	50RB#25	19.11	PASS
Band4	20MHz	16QAM	20300	50RB#50	19.00	PASS
Band4	20MHz	16QAM	20300	100RB#0	19.07	PASS

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Verdict
Band5	1.4MHz	QPSK	20407	1RB#0	22.05	PASS
Band5	1.4MHz	QPSK	20407	1RB#2	22.04	PASS
Band5	1.4MHz	QPSK	20407	1RB#5	22.10	PASS
Band5	1.4MHz	QPSK	20407	3RB#0	22.05	PASS
Band5	1.4MHz	QPSK	20407	3RB#1	22.07	PASS
Band5	1.4MHz	QPSK	20407	3RB#3	22.06	PASS
Band5	1.4MHz	QPSK	20407	6RB#0	21.14	PASS
Band5	1.4MHz	QPSK	20525	1RB#0	22.05	PASS
Band5	1.4MHz	QPSK	20525	1RB#2	22.02	PASS
Band5	1.4MHz	QPSK	20525	1RB#5	22.03	PASS
Band5	1.4MHz	QPSK	20525	3RB#0	22.09	PASS
Band5	1.4MHz	QPSK	20525	3RB#1	22.08	PASS
Band5	1.4MHz	QPSK	20525	3RB#3	22.11	PASS
Band5	1.4MHz	QPSK	20525	6RB#0	21.07	PASS
Band5	1.4MHz	QPSK	20643	1RB#0	22.02	PASS
Band5	1.4MHz	QPSK	20643	1RB#2	22.15	PASS
Band5	1.4MHz	QPSK	20643	1RB#5	22.01	PASS
Band5	1.4MHz	QPSK	20643	3RB#0	22.06	PASS
Band5	1.4MHz	QPSK	20643	3RB#1	22.07	PASS
Band5	1.4MHz	QPSK	20643	3RB#3	22.06	PASS
Band5	1.4MHz	QPSK	20643	6RB#0	21.08	PASS
Band5	1.4MHz	16QAM	20407	1RB#0	21.01	PASS
Band5	1.4MHz	16QAM	20407	1RB#2	21.00	PASS
Band5	1.4MHz	16QAM	20407	1RB#5	21.05	PASS
Band5	1.4MHz	16QAM	20407	3RB#0	21.04	PASS
Band5	1.4MHz	16QAM	20407	3RB#1	21.02	PASS
Band5	1.4MHz	16QAM	20407	3RB#3	20.99	PASS
Band5	1.4MHz	16QAM	20407	6RB#0	20.14	PASS
Band5	1.4MHz	16QAM	20525	1RB#0	21.24	PASS
Band5	1.4MHz	16QAM	20525	1RB#2	21.28	PASS
Band5	1.4MHz	16QAM	20525	1RB#5	21.25	PASS
Band5	1.4MHz	16QAM	20525	3RB#0	21.00	PASS
Band5	1.4MHz	16QAM	20525	3RB#1	21.00	PASS
Band5	1.4MHz	16QAM	20525	3RB#3	20.95	PASS
Band5	1.4MHz	16QAM	20525	6RB#0	20.95	PASS

Band5	1.4MHz	16QAM	20643	1RB#0	21.01	PASS
Band5	1.4MHz	16QAM	20643	1RB#2	20.99	PASS
Band5	1.4MHz	16QAM	20643	1RB#5	21.01	PASS
Band5	1.4MHz	16QAM	20643	3RB#0	21.12	PASS
Band5	1.4MHz	16QAM	20643	3RB#1	21.12	PASS
Band5	1.4MHz	16QAM	20643	3RB#3	20.93	PASS
Band5	1.4MHz	16QAM	20643	6RB#0	20.07	PASS
Band5	3MHz	QPSK	20415	1RB#0	22.16	PASS
Band5	3MHz	QPSK	20415	1RB#8	22.19	PASS
Band5	3MHz	QPSK	20415	1RB#14	22.17	PASS
Band5	3MHz	QPSK	20415	8RB#0	21.12	PASS
Band5	3MHz	QPSK	20415	8RB#4	21.12	PASS
Band5	3MHz	QPSK	20415	8RB#7	21.13	PASS
Band5	3MHz	QPSK	20415	15RB#0	21.11	PASS
Band5	3MHz	QPSK	20525	1RB#0	22.10	PASS
Band5	3MHz	QPSK	20525	1RB#8	22.10	PASS
Band5	3MHz	QPSK	20525	1RB#14	22.07	PASS
Band5	3MHz	QPSK	20525	8RB#0	21.05	PASS
Band5	3MHz	QPSK	20525	8RB#4	21.04	PASS
Band5	3MHz	QPSK	20525	8RB#7	21.08	PASS
Band5	3MHz	QPSK	20525	15RB#0	21.09	PASS
Band5	3MHz	QPSK	20635	1RB#0	22.05	PASS
Band5	3MHz	QPSK	20635	1RB#8	22.04	PASS
Band5	3MHz	QPSK	20635	1RB#14	22.05	PASS
Band5	3MHz	QPSK	20635	8RB#0	21.10	PASS
Band5	3MHz	QPSK	20635	8RB#4	21.09	PASS
Band5	3MHz	QPSK	20635	8RB#7	21.11	PASS
Band5	3MHz	QPSK	20635	15RB#0	21.13	PASS
Band5	3MHz	16QAM	20415	1RB#0	21.34	PASS
Band5	3MHz	16QAM	20415	1RB#8	21.35	PASS
Band5	3MHz	16QAM	20415	1RB#14	21.34	PASS
Band5	3MHz	16QAM	20415	8RB#0	21.20	PASS
Band5	3MHz	16QAM	20415	8RB#4	21.20	PASS
Band5	3MHz	16QAM	20415	8RB#7	21.22	PASS
Band5	3MHz	16QAM	20415	15RB#0	21.14	PASS
Band5	3MHz	16QAM	20525	1RB#0	21.25	PASS
Band5	3MHz	16QAM	20525	1RB#8	21.22	PASS

Band5	3MHz	16QAM	20525	1RB#14	21.23	PASS
Band5	3MHz	16QAM	20525	8RB#0	21.09	PASS
Band5	3MHz	16QAM	20525	8RB#4	21.10	PASS
Band5	3MHz	16QAM	20525	8RB#7	21.12	PASS
Band5	3MHz	16QAM	20525	15RB#0	21.08	PASS
Band5	3MHz	16QAM	20635	1RB#0	21.31	PASS
Band5	3MHz	16QAM	20635	1RB#8	21.30	PASS
Band5	3MHz	16QAM	20635	1RB#14	21.27	PASS
Band5	3MHz	16QAM	20635	8RB#0	21.13	PASS
Band5	3MHz	16QAM	20635	8RB#4	21.09	PASS
Band5	3MHz	16QAM	20635	8RB#7	21.10	PASS
Band5	3MHz	16QAM	20635	15RB#0	21.05	PASS
Band5	5MHz	QPSK	20425	1RB#0	22.31	PASS
Band5	5MHz	QPSK	20425	1RB#12	22.25	PASS
Band5	5MHz	QPSK	20425	1RB#24	22.22	PASS
Band5	5MHz	QPSK	20425	12RB#0	21.20	PASS
Band5	5MHz	QPSK	20425	12RB#6	21.19	PASS
Band5	5MHz	QPSK	20425	12RB#13	21.14	PASS
Band5	5MHz	QPSK	20425	25RB#0	21.18	PASS
Band5	5MHz	QPSK	20525	1RB#0	22.28	PASS
Band5	5MHz	QPSK	20525	1RB#12	22.24	PASS
Band5	5MHz	QPSK	20525	1RB#24	22.24	PASS
Band5	5MHz	QPSK	20525	12RB#0	21.17	PASS
Band5	5MHz	QPSK	20525	12RB#6	21.12	PASS
Band5	5MHz	QPSK	20525	12RB#13	21.04	PASS
Band5	5MHz	QPSK	20525	25RB#0	21.08	PASS
Band5	5MHz	QPSK	20625	1RB#0	22.25	PASS
Band5	5MHz	QPSK	20625	1RB#12	22.22	PASS
Band5	5MHz	QPSK	20625	1RB#24	22.26	PASS
Band5	5MHz	QPSK	20625	12RB#0	21.13	PASS
Band5	5MHz	QPSK	20625	12RB#6	21.16	PASS
Band5	5MHz	QPSK	20625	12RB#13	21.09	PASS
Band5	5MHz	QPSK	20625	25RB#0	21.12	PASS
Band5	5MHz	16QAM	20425	1RB#0	21.18	PASS
Band5	5MHz	16QAM	20425	1RB#12	21.16	PASS
Band5	5MHz	16QAM	20425	1RB#24	21.13	PASS
Band5	5MHz	16QAM	20425	12RB#0	20.99	PASS

Band5	5MHz	16QAM	20425	12RB#6	20.70	PASS
Band5	5MHz	16QAM	20425	12RB#13	20.82	PASS
Band5	5MHz	16QAM	20425	25RB#0	20.99	PASS
Band5	5MHz	16QAM	20525	1RB#0	21.15	PASS
Band5	5MHz	16QAM	20525	1RB#12	21.13	PASS
Band5	5MHz	16QAM	20525	1RB#24	21.11	PASS
Band5	5MHz	16QAM	20525	12RB#0	20.72	PASS
Band5	5MHz	16QAM	20525	12RB#6	20.84	PASS
Band5	5MHz	16QAM	20525	12RB#13	20.92	PASS
Band5	5MHz	16QAM	20525	25RB#0	20.80	PASS
Band5	5MHz	16QAM	20625	1RB#0	21.34	PASS
Band5	5MHz	16QAM	20625	1RB#12	21.38	PASS
Band5	5MHz	16QAM	20625	1RB#24	21.39	PASS
Band5	5MHz	16QAM	20625	12RB#0	20.85	PASS
Band5	5MHz	16QAM	20625	12RB#6	20.99	PASS
Band5	5MHz	16QAM	20625	12RB#13	20.71	PASS
Band5	5MHz	16QAM	20625	25RB#0	20.89	PASS
Band5	10MHz	QPSK	20450	1RB#0	22.17	PASS
Band5	10MHz	QPSK	20450	1RB#24	22.14	PASS
Band5	10MHz	QPSK	20450	1RB#49	22.10	PASS
Band5	10MHz	QPSK	20450	25RB#0	21.14	PASS
Band5	10MHz	QPSK	20450	25RB#12	21.11	PASS
Band5	10MHz	QPSK	20450	25RB#25	21.22	PASS
Band5	10MHz	QPSK	20450	50RB#0	21.22	PASS
Band5	10MHz	QPSK	20525	1RB#0	22.36	PASS
Band5	10MHz	QPSK	20525	1RB#24	22.13	PASS
Band5	10MHz	QPSK	20525	1RB#49	22.16	PASS
Band5	10MHz	QPSK	20525	25RB#0	21.14	PASS
Band5	10MHz	QPSK	20525	25RB#12	21.12	PASS
Band5	10MHz	QPSK	20525	25RB#25	21.09	PASS
Band5	10MHz	QPSK	20525	50RB#0	21.15	PASS
Band5	10MHz	QPSK	20600	1RB#0	22.10	PASS
Band5	10MHz	QPSK	20600	1RB#24	22.05	PASS
Band5	10MHz	QPSK	20600	1RB#49	22.03	PASS
Band5	10MHz	QPSK	20600	25RB#0	21.19	PASS
Band5	10MHz	QPSK	20600	25RB#12	21.15	PASS
Band5	10MHz	QPSK	20600	25RB#25	21.06	PASS

Band5	10MHz	QPSK	20600	50RB#0	21.11	PASS
Band5	10MHz	16QAM	20450	1RB#0	21.32	PASS
Band5	10MHz	16QAM	20450	1RB#24	21.28	PASS
Band5	10MHz	16QAM	20450	1RB#49	21.26	PASS
Band5	10MHz	16QAM	20450	25RB#0	20.90	PASS
Band5	10MHz	16QAM	20450	25RB#12	20.85	PASS
Band5	10MHz	16QAM	20450	25RB#25	20.79	PASS
Band5	10MHz	16QAM	20450	50RB#0	20.81	PASS
Band5	10MHz	16QAM	20525	1RB#0	21.32	PASS
Band5	10MHz	16QAM	20525	1RB#24	21.27	PASS
Band5	10MHz	16QAM	20525	1RB#49	21.30	PASS
Band5	10MHz	16QAM	20525	25RB#0	20.93	PASS
Band5	10MHz	16QAM	20525	25RB#12	20.72	PASS
Band5	10MHz	16QAM	20525	25RB#25	20.86	PASS
Band5	10MHz	16QAM	20525	50RB#0	20.90	PASS
Band5	10MHz	16QAM	20600	1RB#0	21.30	PASS
Band5	10MHz	16QAM	20600	1RB#24	21.25	PASS
Band5	10MHz	16QAM	20600	1RB#49	21.27	PASS
Band5	10MHz	16QAM	20600	25RB#0	20.90	PASS
Band5	10MHz	16QAM	20600	25RB#12	20.79	PASS
Band5	10MHz	16QAM	20600	25RB#25	20.88	PASS
Band5	10MHz	16QAM	20600	50RB#0	20.95	PASS

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Verdict
Band12	1.4MHz	QPSK	23017	1RB#0	22.22	PASS
Band12	1.4MHz	QPSK	23017	1RB#2	22.22	PASS
Band12	1.4MHz	QPSK	23017	1RB#5	22.19	PASS
Band12	1.4MHz	QPSK	23017	3RB#0	22.25	PASS
Band12	1.4MHz	QPSK	23017	3RB#1	22.26	PASS
Band12	1.4MHz	QPSK	23017	3RB#3	22.22	PASS
Band12	1.4MHz	QPSK	23017	6RB#0	21.25	PASS
Band12	1.4MHz	QPSK	23095	1RB#0	22.22	PASS
Band12	1.4MHz	QPSK	23095	1RB#2	22.17	PASS
Band12	1.4MHz	QPSK	23095	1RB#5	22.19	PASS
Band12	1.4MHz	QPSK	23095	3RB#0	22.28	PASS

Band12	1.4MHz	QPSK	23095	3RB#1	22.26	PASS
Band12	1.4MHz	QPSK	23095	3RB#3	22.27	PASS
Band12	1.4MHz	QPSK	23095	6RB#0	21.24	PASS
Band12	1.4MHz	QPSK	23173	1RB#0	22.19	PASS
Band12	1.4MHz	QPSK	23173	1RB#2	22.17	PASS
Band12	1.4MHz	QPSK	23173	1RB#5	22.09	PASS
Band12	1.4MHz	QPSK	23173	3RB#0	22.22	PASS
Band12	1.4MHz	QPSK	23173	3RB#1	22.22	PASS
Band12	1.4MHz	QPSK	23173	3RB#3	22.18	PASS
Band12	1.4MHz	QPSK	23173	6RB#0	21.26	PASS
Band12	1.4MHz	16QAM	23017	1RB#0	21.31	PASS
Band12	1.4MHz	16QAM	23017	1RB#2	21.39	PASS
Band12	1.4MHz	16QAM	23017	1RB#5	21.30	PASS
Band12	1.4MHz	16QAM	23017	3RB#0	21.14	PASS
Band12	1.4MHz	16QAM	23017	3RB#1	21.15	PASS
Band12	1.4MHz	16QAM	23017	3RB#3	21.14	PASS
Band12	1.4MHz	16QAM	23017	6RB#0	21.28	PASS
Band12	1.4MHz	16QAM	23095	1RB#0	21.38	PASS
Band12	1.4MHz	16QAM	23095	1RB#2	21.43	PASS
Band12	1.4MHz	16QAM	23095	1RB#5	21.41	PASS
Band12	1.4MHz	16QAM	23095	3RB#0	21.16	PASS
Band12	1.4MHz	16QAM	23095	3RB#1	21.13	PASS
Band12	1.4MHz	16QAM	23095	3RB#3	21.15	PASS
Band12	1.4MHz	16QAM	23095	6RB#0	21.11	PASS
Band12	1.4MHz	16QAM	23173	1RB#0	21.25	PASS
Band12	1.4MHz	16QAM	23173	1RB#2	21.34	PASS
Band12	1.4MHz	16QAM	23173	1RB#5	21.24	PASS
Band12	1.4MHz	16QAM	23173	3RB#0	21.11	PASS
Band12	1.4MHz	16QAM	23173	3RB#1	21.09	PASS
Band12	1.4MHz	16QAM	23173	3RB#3	21.13	PASS
Band12	1.4MHz	16QAM	23173	6RB#0	20.98	PASS
Band12	3MHz	QPSK	23025	1RB#0	22.31	PASS
Band12	3MHz	QPSK	23025	1RB#8	22.29	PASS
Band12	3MHz	QPSK	23025	1RB#14	22.26	PASS
Band12	3MHz	QPSK	23025	8RB#0	21.24	PASS
Band12	3MHz	QPSK	23025	8RB#4	21.23	PASS
Band12	3MHz	QPSK	23025	8RB#7	21.24	PASS

Band12	3MHz	QPSK	23025	15RB#0	21.25	PASS
Band12	3MHz	QPSK	23095	1RB#0	22.26	PASS
Band12	3MHz	QPSK	23095	1RB#8	22.18	PASS
Band12	3MHz	QPSK	23095	1RB#14	22.16	PASS
Band12	3MHz	QPSK	23095	8RB#0	21.21	PASS
Band12	3MHz	QPSK	23095	8RB#4	21.22	PASS
Band12	3MHz	QPSK	23095	8RB#7	21.16	PASS
Band12	3MHz	QPSK	23095	15RB#0	21.20	PASS
Band12	3MHz	QPSK	23165	1RB#0	22.27	PASS
Band12	3MHz	QPSK	23165	1RB#8	22.20	PASS
Band12	3MHz	QPSK	23165	1RB#14	22.19	PASS
Band12	3MHz	QPSK	23165	8RB#0	21.24	PASS
Band12	3MHz	QPSK	23165	8RB#4	21.24	PASS
Band12	3MHz	QPSK	23165	8RB#7	21.17	PASS
Band12	3MHz	QPSK	23165	15RB#0	21.21	PASS
Band12	3MHz	16QAM	23025	1RB#0	21.44	PASS
Band12	3MHz	16QAM	23025	1RB#8	21.42	PASS
Band12	3MHz	16QAM	23025	1RB#14	21.43	PASS
Band12	3MHz	16QAM	23025	8RB#0	21.34	PASS
Band12	3MHz	16QAM	23025	8RB#4	21.32	PASS
Band12	3MHz	16QAM	23025	8RB#7	21.30	PASS
Band12	3MHz	16QAM	23025	15RB#0	21.27	PASS
Band12	3MHz	16QAM	23095	1RB#0	21.46	PASS
Band12	3MHz	16QAM	23095	1RB#8	21.36	PASS
Band12	3MHz	16QAM	23095	1RB#14	21.30	PASS
Band12	3MHz	16QAM	23095	8RB#0	21.25	PASS
Band12	3MHz	16QAM	23095	8RB#4	21.22	PASS
Band12	3MHz	16QAM	23095	8RB#7	21.17	PASS
Band12	3MHz	16QAM	23095	15RB#0	21.11	PASS
Band12	3MHz	16QAM	23165	1RB#0	21.13	PASS
Band12	3MHz	16QAM	23165	1RB#8	21.14	PASS
Band12	3MHz	16QAM	23165	1RB#14	21.10	PASS
Band12	3MHz	16QAM	23165	8RB#0	21.26	PASS
Band12	3MHz	16QAM	23165	8RB#4	21.26	PASS
Band12	3MHz	16QAM	23165	8RB#7	21.23	PASS
Band12	3MHz	16QAM	23165	15RB#0	21.14	PASS
Band12	5MHz	QPSK	23035	1RB#0	22.43	PASS

Band12	5MHz	QPSK	23035	1RB#12	22.43	PASS
Band12	5MHz	QPSK	23035	1RB#24	22.36	PASS
Band12	5MHz	QPSK	23035	12RB#0	21.25	PASS
Band12	5MHz	QPSK	23035	12RB#6	21.27	PASS
Band12	5MHz	QPSK	23035	12RB#13	21.26	PASS
Band12	5MHz	QPSK	23035	25RB#0	21.25	PASS
Band12	5MHz	QPSK	23095	1RB#0	22.34	PASS
Band12	5MHz	QPSK	23095	1RB#12	22.32	PASS
Band12	5MHz	QPSK	23095	1RB#24	22.28	PASS
Band12	5MHz	QPSK	23095	12RB#0	21.27	PASS
Band12	5MHz	QPSK	23095	12RB#6	21.25	PASS
Band12	5MHz	QPSK	23095	12RB#13	21.18	PASS
Band12	5MHz	QPSK	23095	25RB#0	21.23	PASS
Band12	5MHz	QPSK	23155	1RB#0	22.36	PASS
Band12	5MHz	QPSK	23155	1RB#12	22.35	PASS
Band12	5MHz	QPSK	23155	1RB#24	22.41	PASS
Band12	5MHz	QPSK	23155	12RB#0	21.30	PASS
Band12	5MHz	QPSK	23155	12RB#6	21.26	PASS
Band12	5MHz	QPSK	23155	12RB#13	21.20	PASS
Band12	5MHz	QPSK	23155	25RB#0	21.27	PASS
Band12	5MHz	16QAM	23035	1RB#0	21.36	PASS
Band12	5MHz	16QAM	23035	1RB#12	21.33	PASS
Band12	5MHz	16QAM	23035	1RB#24	21.28	PASS
Band12	5MHz	16QAM	23035	12RB#0	21.23	PASS
Band12	5MHz	16QAM	23035	12RB#6	21.23	PASS
Band12	5MHz	16QAM	23035	12RB#13	21.22	PASS
Band12	5MHz	16QAM	23035	25RB#0	21.27	PASS
Band12	5MHz	16QAM	23095	1RB#0	21.51	PASS
Band12	5MHz	16QAM	23095	1RB#12	21.53	PASS
Band12	5MHz	16QAM	23095	1RB#24	21.50	PASS
Band12	5MHz	16QAM	23095	12RB#0	21.28	PASS
Band12	5MHz	16QAM	23095	12RB#6	21.27	PASS
Band12	5MHz	16QAM	23095	12RB#13	21.23	PASS
Band12	5MHz	16QAM	23095	25RB#0	21.19	PASS
Band12	5MHz	16QAM	23155	1RB#0	21.34	PASS
Band12	5MHz	16QAM	23155	1RB#12	21.27	PASS
Band12	5MHz	16QAM	23155	1RB#24	21.33	PASS

Band12	5MHz	16QAM	23155	12RB#0	21.28	PASS
Band12	5MHz	16QAM	23155	12RB#6	21.32	PASS
Band12	5MHz	16QAM	23155	12RB#13	21.23	PASS
Band12	5MHz	16QAM	23155	25RB#0	21.29	PASS
Band12	10MHz	QPSK	23060	1RB#0	22.38	PASS
Band12	10MHz	QPSK	23060	1RB#24	22.24	PASS
Band12	10MHz	QPSK	23060	1RB#49	22.26	PASS
Band12	10MHz	QPSK	23060	25RB#0	21.24	PASS
Band12	10MHz	QPSK	23060	25RB#12	21.22	PASS
Band12	10MHz	QPSK	23060	25RB#25	21.30	PASS
Band12	10MHz	QPSK	23060	50RB#0	21.29	PASS
Band12	10MHz	QPSK	23095	1RB#0	22.23	PASS
Band12	10MHz	QPSK	23095	1RB#24	22.25	PASS
Band12	10MHz	QPSK	23095	1RB#49	22.18	PASS
Band12	10MHz	QPSK	23095	25RB#0	21.25	PASS
Band12	10MHz	QPSK	23095	25RB#12	21.27	PASS
Band12	10MHz	QPSK	23095	25RB#25	21.22	PASS
Band12	10MHz	QPSK	23095	50RB#0	21.26	PASS
Band12	10MHz	QPSK	23130	1RB#0	22.47	PASS
Band12	10MHz	QPSK	23130	1RB#24	22.26	PASS
Band12	10MHz	QPSK	23130	1RB#49	22.24	PASS
Band12	10MHz	QPSK	23130	25RB#0	21.27	PASS
Band12	10MHz	QPSK	23130	25RB#12	21.28	PASS
Band12	10MHz	QPSK	23130	25RB#25	21.17	PASS
Band12	10MHz	QPSK	23130	50RB#0	21.26	PASS
Band12	10MHz	16QAM	23060	1RB#0	21.50	PASS
Band12	10MHz	16QAM	23060	1RB#24	21.37	PASS
Band12	10MHz	16QAM	23060	1RB#49	21.41	PASS
Band12	10MHz	16QAM	23060	25RB#0	21.22	PASS
Band12	10MHz	16QAM	23060	25RB#12	21.23	PASS
Band12	10MHz	16QAM	23060	25RB#25	21.29	PASS
Band12	10MHz	16QAM	23060	50RB#0	21.26	PASS
Band12	10MHz	16QAM	23095	1RB#0	21.44	PASS
Band12	10MHz	16QAM	23095	1RB#24	21.41	PASS
Band12	10MHz	16QAM	23095	1RB#49	21.36	PASS
Band12	10MHz	16QAM	23095	25RB#0	21.30	PASS
Band12	10MHz	16QAM	23095	25RB#12	21.31	PASS

Band12	10MHz	16QAM	23095	25RB#25	21.24	PASS
Band12	10MHz	16QAM	23095	50RB#0	21.27	PASS
Band12	10MHz	16QAM	23130	1RB#0	21.24	PASS
Band12	10MHz	16QAM	23130	1RB#24	21.15	PASS
Band12	10MHz	16QAM	23130	1RB#49	21.14	PASS
Band12	10MHz	16QAM	23130	25RB#0	21.32	PASS
Band12	10MHz	16QAM	23130	25RB#12	21.33	PASS
Band12	10MHz	16QAM	23130	25RB#25	21.20	PASS
Band12	10MHz	16QAM	23130	50RB#0	21.22	PASS

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Verdict
Band13	5MHz	QPSK	23205	1RB#0	22.49	PASS
Band13	5MHz	QPSK	23205	1RB#12	22.50	PASS
Band13	5MHz	QPSK	23205	1RB#24	22.51	PASS
Band13	5MHz	QPSK	23205	12RB#0	21.29	PASS
Band13	5MHz	QPSK	23205	12RB#6	21.29	PASS
Band13	5MHz	QPSK	23205	12RB#13	21.28	PASS
Band13	5MHz	QPSK	23205	25RB#0	21.31	PASS
Band13	5MHz	QPSK	23230	1RB#0	22.42	PASS
Band13	5MHz	QPSK	23230	1RB#12	22.43	PASS
Band13	5MHz	QPSK	23230	1RB#24	22.42	PASS
Band13	5MHz	QPSK	23230	12RB#0	21.34	PASS
Band13	5MHz	QPSK	23230	12RB#6	21.34	PASS
Band13	5MHz	QPSK	23230	12RB#13	21.23	PASS
Band13	5MHz	QPSK	23230	25RB#0	21.32	PASS
Band13	5MHz	QPSK	23255	1RB#0	22.48	PASS
Band13	5MHz	QPSK	23255	1RB#12	22.43	PASS
Band13	5MHz	QPSK	23255	1RB#24	22.57	PASS
Band13	5MHz	QPSK	23255	12RB#0	21.30	PASS
Band13	5MHz	QPSK	23255	12RB#6	21.30	PASS
Band13	5MHz	QPSK	23255	12RB#13	21.21	PASS
Band13	5MHz	QPSK	23255	25RB#0	21.27	PASS
Band13	5MHz	16QAM	23205	1RB#0	21.35	PASS
Band13	5MHz	16QAM	23205	1RB#12	21.30	PASS

Band13	5MHz	16QAM	23205	1RB#24	21.37	PASS
Band13	5MHz	16QAM	23205	12RB#0	21.31	PASS
Band13	5MHz	16QAM	23205	12RB#6	21.27	PASS
Band13	5MHz	16QAM	23205	12RB#13	21.29	PASS
Band13	5MHz	16QAM	23205	25RB#0	21.33	PASS
Band13	5MHz	16QAM	23230	1RB#0	21.56	PASS
Band13	5MHz	16QAM	23230	1RB#12	21.57	PASS
Band13	5MHz	16QAM	23230	1RB#24	21.56	PASS
Band13	5MHz	16QAM	23230	12RB#0	21.38	PASS
Band13	5MHz	16QAM	23230	12RB#6	21.37	PASS
Band13	5MHz	16QAM	23230	12RB#13	21.28	PASS
Band13	5MHz	16QAM	23230	25RB#0	21.31	PASS
Band13	5MHz	16QAM	23255	1RB#0	21.43	PASS
Band13	5MHz	16QAM	23255	1RB#12	21.39	PASS
Band13	5MHz	16QAM	23255	1RB#24	21.41	PASS
Band13	5MHz	16QAM	23255	12RB#0	21.29	PASS
Band13	5MHz	16QAM	23255	12RB#6	21.31	PASS
Band13	5MHz	16QAM	23255	12RB#13	21.22	PASS
Band13	5MHz	16QAM	23255	25RB#0	21.31	PASS
Band13	10MHz	QPSK	23230	1RB#0	22.35	PASS
Band13	10MHz	QPSK	23230	1RB#24	22.58	PASS
Band13	10MHz	QPSK	23230	1RB#49	22.37	PASS
Band13	10MHz	QPSK	23230	25RB#0	21.28	PASS
Band13	10MHz	QPSK	23230	25RB#12	21.28	PASS
Band13	10MHz	QPSK	23230	25RB#25	21.24	PASS
Band13	10MHz	QPSK	23230	50RB#0	21.29	PASS
Band13	10MHz	16QAM	23230	1RB#0	21.49	PASS
Band13	10MHz	16QAM	23230	1RB#24	21.51	PASS
Band13	10MHz	16QAM	23230	1RB#49	21.52	PASS
Band13	10MHz	16QAM	23230	25RB#0	21.27	PASS
Band13	10MHz	16QAM	23230	25RB#12	21.28	PASS
Band13	10MHz	16QAM	23230	25RB#25	21.23	PASS
Band13	10MHz	16QAM	23230	50RB#0	21.25	PASS

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Verdict
Band17	5MHz	QPSK	23755	1RB#0	22.43	PASS
Band17	5MHz	QPSK	23755	1RB#12	22.36	PASS
Band17	5MHz	QPSK	23755	1RB#24	22.46	PASS
Band17	5MHz	QPSK	23755	12RB#0	21.30	PASS
Band17	5MHz	QPSK	23755	12RB#6	21.28	PASS
Band17	5MHz	QPSK	23755	12RB#13	21.24	PASS
Band17	5MHz	QPSK	23755	25RB#0	21.25	PASS
Band17	5MHz	QPSK	23790	1RB#0	22.36	PASS
Band17	5MHz	QPSK	23790	1RB#12	22.38	PASS
Band17	5MHz	QPSK	23790	1RB#24	22.38	PASS
Band17	5MHz	QPSK	23790	12RB#0	21.30	PASS
Band17	5MHz	QPSK	23790	12RB#6	21.34	PASS
Band17	5MHz	QPSK	23790	12RB#13	21.24	PASS
Band17	5MHz	QPSK	23790	25RB#0	21.29	PASS
Band17	5MHz	QPSK	23825	1RB#0	22.46	PASS
Band17	5MHz	QPSK	23825	1RB#12	22.43	PASS
Band17	5MHz	QPSK	23825	1RB#24	22.51	PASS
Band17	5MHz	QPSK	23825	12RB#0	21.34	PASS
Band17	5MHz	QPSK	23825	12RB#6	21.36	PASS
Band17	5MHz	QPSK	23825	12RB#13	21.25	PASS
Band17	5MHz	QPSK	23825	25RB#0	21.33	PASS
Band17	5MHz	16QAM	23755	1RB#0	21.32	PASS
Band17	5MHz	16QAM	23755	1RB#12	21.27	PASS
Band17	5MHz	16QAM	23755	1RB#24	21.35	PASS
Band17	5MHz	16QAM	23755	12RB#0	21.26	PASS
Band17	5MHz	16QAM	23755	12RB#6	21.26	PASS
Band17	5MHz	16QAM	23755	12RB#13	21.23	PASS
Band17	5MHz	16QAM	23755	25RB#0	21.27	PASS
Band17	5MHz	16QAM	23790	1RB#0	21.55	PASS
Band17	5MHz	16QAM	23790	1RB#12	21.55	PASS
Band17	5MHz	16QAM	23790	1RB#24	21.57	PASS
Band17	5MHz	16QAM	23790	12RB#0	21.34	PASS
Band17	5MHz	16QAM	23790	12RB#6	21.34	PASS
Band17	5MHz	16QAM	23790	12RB#13	21.29	PASS
Band17	5MHz	16QAM	23790	25RB#0	21.29	PASS

Band17	5MHz	16QAM	23825	1RB#0	21.43	PASS
Band17	5MHz	16QAM	23825	1RB#12	21.38	PASS
Band17	5MHz	16QAM	23825	1RB#24	21.43	PASS
Band17	5MHz	16QAM	23825	12RB#0	20.34	PASS
Band17	5MHz	16QAM	23825	12RB#6	21.36	PASS
Band17	5MHz	16QAM	23825	12RB#13	21.32	PASS
Band17	5MHz	16QAM	23825	25RB#0	21.32	PASS
Band17	10MHz	QPSK	23780	1RB#0	22.27	PASS
Band17	10MHz	QPSK	23780	1RB#24	22.31	PASS
Band17	10MHz	QPSK	23780	1RB#49	22.23	PASS
Band17	10MHz	QPSK	23780	25RB#0	21.23	PASS
Band17	10MHz	QPSK	23780	25RB#12	21.21	PASS
Band17	10MHz	QPSK	23780	25RB#25	21.20	PASS
Band17	10MHz	QPSK	23780	50RB#0	21.25	PASS
Band17	10MHz	QPSK	23790	1RB#0	22.26	PASS
Band17	10MHz	QPSK	23790	1RB#24	22.27	PASS
Band17	10MHz	QPSK	23790	1RB#49	22.47	PASS
Band17	10MHz	QPSK	23790	25RB#0	21.26	PASS
Band17	10MHz	QPSK	23790	25RB#12	21.28	PASS
Band17	10MHz	QPSK	23790	25RB#25	21.23	PASS
Band17	10MHz	QPSK	23790	50RB#0	21.27	PASS
Band17	10MHz	QPSK	23800	1RB#0	22.37	PASS
Band17	10MHz	QPSK	23800	1RB#24	22.31	PASS
Band17	10MHz	QPSK	23800	1RB#49	22.29	PASS
Band17	10MHz	QPSK	23800	25RB#0	21.32	PASS
Band17	10MHz	QPSK	23800	25RB#12	21.29	PASS
Band17	10MHz	QPSK	23800	25RB#25	21.25	PASS
Band17	10MHz	QPSK	23800	50RB#0	21.28	PASS
Band17	10MHz	16QAM	23780	1RB#0	21.46	PASS
Band17	10MHz	16QAM	23780	1RB#24	21.47	PASS
Band17	10MHz	16QAM	23780	1RB#49	21.42	PASS
Band17	10MHz	16QAM	23780	25RB#0	21.22	PASS
Band17	10MHz	16QAM	23780	25RB#12	21.21	PASS
Band17	10MHz	16QAM	23780	25RB#25	21.20	PASS
Band17	10MHz	16QAM	23780	50RB#0	21.21	PASS
Band17	10MHz	16QAM	23790	1RB#0	21.48	PASS
Band17	10MHz	16QAM	23790	1RB#24	21.47	PASS

Band17	10MHz	16QAM	23790	1RB#49	21.42	PASS
Band17	10MHz	16QAM	23790	25RB#0	21.31	PASS
Band17	10MHz	16QAM	23790	25RB#12	21.29	PASS
Band17	10MHz	16QAM	23790	25RB#25	21.26	PASS
Band17	10MHz	16QAM	23790	50RB#0	21.24	PASS
Band17	10MHz	16QAM	23800	1RB#0	21.24	PASS
Band17	10MHz	16QAM	23800	1RB#24	21.22	PASS
Band17	10MHz	16QAM	23800	1RB#49	21.20	PASS
Band17	10MHz	16QAM	23800	25RB#0	21.33	PASS
Band17	10MHz	16QAM	23800	25RB#12	21.35	PASS
Band17	10MHz	16QAM	23800	25RB#25	21.24	PASS
Band17	10MHz	16QAM	23800	50RB#0	21.26	PASS

LTE(P1)

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Verdict
Band25	1.4MHz	QPSK	26047	1RB#0	21.50	PASS
Band25	1.4MHz	QPSK	26047	1RB#2	21.24	PASS
Band25	1.4MHz	QPSK	26047	1RB#5	21.31	PASS
Band25	1.4MHz	QPSK	26047	3RB#0	21.44	PASS
Band25	1.4MHz	QPSK	26047	3RB#1	21.46	PASS
Band25	1.4MHz	QPSK	26047	3RB#3	21.50	PASS
Band25	1.4MHz	QPSK	26047	6RB#0	21.45	PASS
Band25	1.4MHz	QPSK	26365	1RB#0	21.69	PASS
Band25	1.4MHz	QPSK	26365	1RB#2	21.38	PASS
Band25	1.4MHz	QPSK	26365	1RB#5	21.63	PASS
Band25	1.4MHz	QPSK	26365	3RB#0	21.68	PASS
Band25	1.4MHz	QPSK	26365	3RB#1	21.69	PASS
Band25	1.4MHz	QPSK	26365	3RB#3	21.70	PASS
Band25	1.4MHz	QPSK	26365	6RB#0	21.66	PASS
Band25	1.4MHz	QPSK	26683	1RB#0	21.01	PASS
Band25	1.4MHz	QPSK	26683	1RB#2	21.82	PASS
Band25	1.4MHz	QPSK	26683	1RB#5	21.84	PASS
Band25	1.4MHz	QPSK	26683	3RB#0	21.47	PASS
Band25	1.4MHz	QPSK	26683	3RB#1	21.44	PASS
Band25	1.4MHz	QPSK	26683	3RB#3	21.45	PASS
Band25	1.4MHz	QPSK	26683	6RB#0	21.43	PASS

Band25	1.4MHz	16QAM	26047	1RB#0	21.42	PASS
Band25	1.4MHz	16QAM	26047	1RB#2	21.25	PASS
Band25	1.4MHz	16QAM	26047	1RB#5	21.32	PASS
Band25	1.4MHz	16QAM	26047	3RB#0	21.36	PASS
Band25	1.4MHz	16QAM	26047	3RB#1	21.36	PASS
Band25	1.4MHz	16QAM	26047	3RB#3	21.37	PASS
Band25	1.4MHz	16QAM	26047	6RB#0	21.30	PASS
Band25	1.4MHz	16QAM	26365	1RB#0	21.48	PASS
Band25	1.4MHz	16QAM	26365	1RB#2	21.47	PASS
Band25	1.4MHz	16QAM	26365	1RB#5	21.46	PASS
Band25	1.4MHz	16QAM	26365	3RB#0	21.57	PASS
Band25	1.4MHz	16QAM	26365	3RB#1	21.59	PASS
Band25	1.4MHz	16QAM	26365	3RB#3	21.58	PASS
Band25	1.4MHz	16QAM	26365	6RB#0	21.55	PASS
Band25	1.4MHz	16QAM	26683	1RB#0	21.41	PASS
Band25	1.4MHz	16QAM	26683	1RB#2	21.49	PASS
Band25	1.4MHz	16QAM	26683	1RB#5	21.42	PASS
Band25	1.4MHz	16QAM	26683	3RB#0	21.33	PASS
Band25	1.4MHz	16QAM	26683	3RB#1	21.34	PASS
Band25	1.4MHz	16QAM	26683	3RB#3	21.39	PASS
Band25	1.4MHz	16QAM	26683	6RB#0	21.47	PASS
Band25	3MHz	QPSK	26055	1RB#0	21.44	PASS
Band25	3MHz	QPSK	26055	1RB#8	21.37	PASS
Band25	3MHz	QPSK	26055	1RB#14	21.36	PASS
Band25	3MHz	QPSK	26055	8RB#0	21.40	PASS
Band25	3MHz	QPSK	26055	8RB#4	21.37	PASS
Band25	3MHz	QPSK	26055	8RB#7	21.36	PASS
Band25	3MHz	QPSK	26055	15RB#0	21.42	PASS
Band25	3MHz	QPSK	26365	1RB#0	21.69	PASS
Band25	3MHz	QPSK	26365	1RB#8	21.64	PASS
Band25	3MHz	QPSK	26365	1RB#14	21.60	PASS
Band25	3MHz	QPSK	26365	8RB#0	21.63	PASS
Band25	3MHz	QPSK	26365	8RB#4	21.66	PASS
Band25	3MHz	QPSK	26365	8RB#7	21.61	PASS
Band25	3MHz	QPSK	26365	15RB#0	21.60	PASS
Band25	3MHz	QPSK	26675	1RB#0	21.57	PASS
Band25	3MHz	QPSK	26675	1RB#8	21.47	PASS

Band25	3MHz	QPSK	26675	1RB#14	21.45	PASS
Band25	3MHz	QPSK	26675	8RB#0	21.47	PASS
Band25	3MHz	QPSK	26675	8RB#4	21.50	PASS
Band25	3MHz	QPSK	26675	8RB#7	21.41	PASS
Band25	3MHz	QPSK	26675	15RB#0	21.47	PASS
Band25	3MHz	16QAM	26055	1RB#0	21.57	PASS
Band25	3MHz	16QAM	26055	1RB#8	21.52	PASS
Band25	3MHz	16QAM	26055	1RB#14	21.45	PASS
Band25	3MHz	16QAM	26055	8RB#0	21.49	PASS
Band25	3MHz	16QAM	26055	8RB#4	21.47	PASS
Band25	3MHz	16QAM	26055	8RB#7	21.41	PASS
Band25	3MHz	16QAM	26055	15RB#0	21.41	PASS
Band25	3MHz	16QAM	26365	1RB#0	21.85	PASS
Band25	3MHz	16QAM	26365	1RB#8	21.81	PASS
Band25	3MHz	16QAM	26365	1RB#14	21.73	PASS
Band25	3MHz	16QAM	26365	8RB#0	21.73	PASS
Band25	3MHz	16QAM	26365	8RB#4	21.71	PASS
Band25	3MHz	16QAM	26365	8RB#7	21.66	PASS
Band25	3MHz	16QAM	26365	15RB#0	21.64	PASS
Band25	3MHz	16QAM	26675	1RB#0	21.79	PASS
Band25	3MHz	16QAM	26675	1RB#8	21.61	PASS
Band25	3MHz	16QAM	26675	1RB#14	21.61	PASS
Band25	3MHz	16QAM	26675	8RB#0	21.50	PASS
Band25	3MHz	16QAM	26675	8RB#4	21.50	PASS
Band25	3MHz	16QAM	26675	8RB#7	21.44	PASS
Band25	3MHz	16QAM	26675	15RB#0	21.43	PASS
Band25	5MHz	QPSK	26065	1RB#0	21.59	PASS
Band25	5MHz	QPSK	26065	1RB#12	21.50	PASS
Band25	5MHz	QPSK	26065	1RB#24	21.38	PASS
Band25	5MHz	QPSK	26065	12RB#0	20.50	PASS
Band25	5MHz	QPSK	26065	12RB#6	20.46	PASS
Band25	5MHz	QPSK	26065	12RB#13	21.37	PASS
Band25	5MHz	QPSK	26065	25RB#0	21.41	PASS
Band25	5MHz	QPSK	26365	1RB#0	21.88	PASS
Band25	5MHz	QPSK	26365	1RB#12	21.82	PASS
Band25	5MHz	QPSK	26365	1RB#24	21.78	PASS
Band25	5MHz	QPSK	26365	12RB#0	21.75	PASS

Band25	5MHz	QPSK	26365	12RB#6	21.70	PASS
Band25	5MHz	QPSK	26365	12RB#13	21.63	PASS
Band25	5MHz	QPSK	26365	25RB#0	21.66	PASS
Band25	5MHz	QPSK	26665	1RB#0	21.71	PASS
Band25	5MHz	QPSK	26665	1RB#12	21.59	PASS
Band25	5MHz	QPSK	26665	1RB#24	21.61	PASS
Band25	5MHz	QPSK	26665	12RB#0	21.58	PASS
Band25	5MHz	QPSK	26665	12RB#6	21.60	PASS
Band25	5MHz	QPSK	26665	12RB#13	21.37	PASS
Band25	5MHz	QPSK	26665	25RB#0	21.52	PASS
Band25	5MHz	16QAM	26065	1RB#0	21.54	PASS
Band25	5MHz	16QAM	26065	1RB#12	21.42	PASS
Band25	5MHz	16QAM	26065	1RB#24	21.39	PASS
Band25	5MHz	16QAM	26065	12RB#0	21.41	PASS
Band25	5MHz	16QAM	26065	12RB#6	21.39	PASS
Band25	5MHz	16QAM	26065	12RB#13	21.30	PASS
Band25	5MHz	16QAM	26065	25RB#0	21.42	PASS
Band25	5MHz	16QAM	26365	1RB#0	21.80	PASS
Band25	5MHz	16QAM	26365	1RB#12	21.76	PASS
Band25	5MHz	16QAM	26365	1RB#24	21.70	PASS
Band25	5MHz	16QAM	26365	12RB#0	21.66	PASS
Band25	5MHz	16QAM	26365	12RB#6	21.74	PASS
Band25	5MHz	16QAM	26365	12RB#13	21.60	PASS
Band25	5MHz	16QAM	26365	25RB#0	21.70	PASS
Band25	5MHz	16QAM	26665	1RB#0	21.85	PASS
Band25	5MHz	16QAM	26665	1RB#12	21.74	PASS
Band25	5MHz	16QAM	26665	1RB#24	21.74	PASS
Band25	5MHz	16QAM	26665	12RB#0	21.59	PASS
Band25	5MHz	16QAM	26665	12RB#6	21.61	PASS
Band25	5MHz	16QAM	26665	12RB#13	21.37	PASS
Band25	5MHz	16QAM	26665	25RB#0	21.49	PASS
Band25	10MHz	QPSK	26090	1RB#0	21.51	PASS
Band25	10MHz	QPSK	26090	1RB#24	21.32	PASS
Band25	10MHz	QPSK	26090	1RB#49	21.18	PASS
Band25	10MHz	QPSK	26090	25RB#0	21.39	PASS
Band25	10MHz	QPSK	26090	25RB#12	21.42	PASS
Band25	10MHz	QPSK	26090	25RB#25	21.38	PASS

Band25	10MHz	QPSK	26090	50RB#0	21.41	PASS
Band25	10MHz	QPSK	26365	1RB#0	21.75	PASS
Band25	10MHz	QPSK	26365	1RB#24	21.76	PASS
Band25	10MHz	QPSK	26365	1RB#49	21.60	PASS
Band25	10MHz	QPSK	26365	25RB#0	21.77	PASS
Band25	10MHz	QPSK	26365	25RB#12	21.80	PASS
Band25	10MHz	QPSK	26365	25RB#25	21.75	PASS
Band25	10MHz	QPSK	26365	50RB#0	21.74	PASS
Band25	10MHz	QPSK	26640	1RB#0	21.67	PASS
Band25	10MHz	QPSK	26640	1RB#24	21.64	PASS
Band25	10MHz	QPSK	26640	1RB#49	21.45	PASS
Band25	10MHz	QPSK	26640	25RB#0	21.57	PASS
Band25	10MHz	QPSK	26640	25RB#12	21.64	PASS
Band25	10MHz	QPSK	26640	25RB#25	21.46	PASS
Band25	10MHz	QPSK	26640	50RB#0	21.59	PASS
Band25	10MHz	16QAM	26090	1RB#0	21.67	PASS
Band25	10MHz	16QAM	26090	1RB#24	21.55	PASS
Band25	10MHz	16QAM	26090	1RB#49	21.38	PASS
Band25	10MHz	16QAM	26090	25RB#0	21.40	PASS
Band25	10MHz	16QAM	26090	25RB#12	21.39	PASS
Band25	10MHz	16QAM	26090	25RB#25	21.35	PASS
Band25	10MHz	16QAM	26090	50RB#0	21.36	PASS
Band25	10MHz	16QAM	26365	1RB#0	21.86	PASS
Band25	10MHz	16QAM	26365	1RB#24	21.87	PASS
Band25	10MHz	16QAM	26365	1RB#49	21.78	PASS
Band25	10MHz	16QAM	26365	25RB#0	21.77	PASS
Band25	10MHz	16QAM	26365	25RB#12	21.77	PASS
Band25	10MHz	16QAM	26365	25RB#25	21.72	PASS
Band25	10MHz	16QAM	26365	50RB#0	21.72	PASS
Band25	10MHz	16QAM	26640	1RB#0	21.79	PASS
Band25	10MHz	16QAM	26640	1RB#24	21.78	PASS
Band25	10MHz	16QAM	26640	1RB#49	21.63	PASS
Band25	10MHz	16QAM	26640	25RB#0	21.65	PASS
Band25	10MHz	16QAM	26640	25RB#12	21.64	PASS
Band25	10MHz	16QAM	26640	25RB#25	21.48	PASS
Band25	10MHz	16QAM	26640	50RB#0	21.57	PASS
Band25	15MHz	QPSK	26115	1RB#0	21.45	PASS

Band25	15MHz	QPSK	26115	1RB#38	21.21	PASS
Band25	15MHz	QPSK	26115	1RB#74	21.08	PASS
Band25	15MHz	QPSK	26115	38RB#0	21.35	PASS
Band25	15MHz	QPSK	26115	38RB#18	21.35	PASS
Band25	15MHz	QPSK	26115	38RB#37	21.31	PASS
Band25	15MHz	QPSK	26115	75RB#0	21.31	PASS
Band25	15MHz	QPSK	26365	1RB#0	21.66	PASS
Band25	15MHz	QPSK	26365	1RB#38	21.73	PASS
Band25	15MHz	QPSK	26365	1RB#74	21.49	PASS
Band25	15MHz	QPSK	26365	38RB#0	21.74	PASS
Band25	15MHz	QPSK	26365	38RB#18	21.72	PASS
Band25	15MHz	QPSK	26365	38RB#37	21.72	PASS
Band25	15MHz	QPSK	26365	75RB#0	21.72	PASS
Band25	15MHz	QPSK	26615	1RB#0	21.49	PASS
Band25	15MHz	QPSK	26615	1RB#38	21.55	PASS
Band25	15MHz	QPSK	26615	1RB#74	21.31	PASS
Band25	15MHz	QPSK	26615	38RB#0	21.56	PASS
Band25	15MHz	QPSK	26615	38RB#18	21.54	PASS
Band25	15MHz	QPSK	26615	38RB#37	21.54	PASS
Band25	15MHz	QPSK	26615	75RB#0	21.54	PASS
Band25	15MHz	16QAM	26115	1RB#0	21.64	PASS
Band25	15MHz	16QAM	26115	1RB#38	21.48	PASS
Band25	15MHz	16QAM	26115	1RB#74	21.33	PASS
Band25	15MHz	16QAM	26115	38RB#0	21.32	PASS
Band25	15MHz	16QAM	26115	38RB#18	21.30	PASS
Band25	15MHz	16QAM	26115	38RB#37	21.32	PASS
Band25	15MHz	16QAM	26115	75RB#0	21.46	PASS
Band25	15MHz	16QAM	26365	1RB#0	21.82	PASS
Band25	15MHz	16QAM	26365	1RB#38	21.81	PASS
Band25	15MHz	16QAM	26365	1RB#74	21.66	PASS
Band25	15MHz	16QAM	26365	38RB#0	21.73	PASS
Band25	15MHz	16QAM	26365	38RB#18	21.72	PASS
Band25	15MHz	16QAM	26365	38RB#37	21.72	PASS
Band25	15MHz	16QAM	26365	75RB#0	21.67	PASS
Band25	15MHz	16QAM	26615	1RB#0	21.61	PASS
Band25	15MHz	16QAM	26615	1RB#38	21.73	PASS
Band25	15MHz	16QAM	26615	1RB#74	21.52	PASS

Band25	15MHz	16QAM	26615	38RB#0	21.53	PASS
Band25	15MHz	16QAM	26615	38RB#18	21.54	PASS
Band25	15MHz	16QAM	26615	38RB#37	21.54	PASS
Band25	15MHz	16QAM	26615	75RB#0	21.49	PASS
Band25	20MHz	QPSK	26140	1RB#0	21.63	PASS
Band25	20MHz	QPSK	26140	1RB#49	21.34	PASS
Band25	20MHz	QPSK	26140	1RB#99	21.40	PASS
Band25	20MHz	QPSK	26140	50RB#0	21.41	PASS
Band25	20MHz	QPSK	26140	50RB#25	21.37	PASS
Band25	20MHz	QPSK	26140	50RB#50	21.38	PASS
Band25	20MHz	QPSK	26140	100RB#0	21.39	PASS
Band25	20MHz	QPSK	26365	1RB#0	21.64	PASS
Band25	20MHz	QPSK	26365	1RB#49	21.89	PASS
Band25	20MHz	QPSK	26365	1RB#99	21.49	PASS
Band25	20MHz	QPSK	26365	50RB#0	21.77	PASS
Band25	20MHz	QPSK	26365	50RB#25	21.78	PASS
Band25	20MHz	QPSK	26365	50RB#50	21.68	PASS
Band25	20MHz	QPSK	26365	100RB#0	21.73	PASS
Band25	20MHz	QPSK	26590	1RB#0	21.56	PASS
Band25	20MHz	QPSK	26590	1RB#49	21.73	PASS
Band25	20MHz	QPSK	26590	1RB#99	21.50	PASS
Band25	20MHz	QPSK	26590	50RB#0	21.64	PASS
Band25	20MHz	QPSK	26590	50RB#25	21.66	PASS
Band25	20MHz	QPSK	26590	50RB#50	21.57	PASS
Band25	20MHz	QPSK	26590	100RB#0	21.58	PASS
Band25	20MHz	16QAM	26140	1RB#0	21.62	PASS
Band25	20MHz	16QAM	26140	1RB#49	21.46	PASS
Band25	20MHz	16QAM	26140	1RB#99	21.42	PASS
Band25	20MHz	16QAM	26140	50RB#0	21.38	PASS
Band25	20MHz	16QAM	26140	50RB#25	21.34	PASS
Band25	20MHz	16QAM	26140	50RB#50	21.40	PASS
Band25	20MHz	16QAM	26140	100RB#0	21.35	PASS
Band25	20MHz	16QAM	26365	1RB#0	21.81	PASS
Band25	20MHz	16QAM	26365	1RB#49	21.06	PASS
Band25	20MHz	16QAM	26365	1RB#99	21.70	PASS
Band25	20MHz	16QAM	26365	50RB#0	21.81	PASS
Band25	20MHz	16QAM	26365	50RB#25	21.80	PASS

Band25	20MHz	16QAM	26365	50RB#50	21.70	PASS
Band25	20MHz	16QAM	26365	100RB#0	21.72	PASS
Band25	20MHz	16QAM	26590	1RB#0	21.58	PASS
Band25	20MHz	16QAM	26590	1RB#49	21.72	PASS
Band25	20MHz	16QAM	26590	1RB#99	21.48	PASS
Band25	20MHz	16QAM	26590	50RB#0	21.64	PASS
Band25	20MHz	16QAM	26590	50RB#25	21.64	PASS
Band25	20MHz	16QAM	26590	50RB#50	21.55	PASS
Band25	20MHz	16QAM	26590	100RB#0	21.54	PASS

LTE(P4)

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Verdict
Band25	1.4MHz	QPSK	26047	1RB#0	18.37	PASS
Band25	1.4MHz	QPSK	26047	1RB#2	18.28	PASS
Band25	1.4MHz	QPSK	26047	1RB#5	18.36	PASS
Band25	1.4MHz	QPSK	26047	3RB#0	18.32	PASS
Band25	1.4MHz	QPSK	26047	3RB#1	18.32	PASS
Band25	1.4MHz	QPSK	26047	3RB#3	18.36	PASS
Band25	1.4MHz	QPSK	26047	6RB#0	18.40	PASS
Band25	1.4MHz	QPSK	26365	1RB#0	18.47	PASS
Band25	1.4MHz	QPSK	26365	1RB#2	18.42	PASS
Band25	1.4MHz	QPSK	26365	1RB#5	18.41	PASS
Band25	1.4MHz	QPSK	26365	3RB#0	18.44	PASS
Band25	1.4MHz	QPSK	26365	3RB#1	18.42	PASS
Band25	1.4MHz	QPSK	26365	3RB#3	18.41	PASS
Band25	1.4MHz	QPSK	26365	6RB#0	18.44	PASS
Band25	1.4MHz	QPSK	26683	1RB#0	18.53	PASS
Band25	1.4MHz	QPSK	26683	1RB#2	18.44	PASS
Band25	1.4MHz	QPSK	26683	1RB#5	18.48	PASS
Band25	1.4MHz	QPSK	26683	3RB#0	18.47	PASS
Band25	1.4MHz	QPSK	26683	3RB#1	18.47	PASS
Band25	1.4MHz	QPSK	26683	3RB#3	18.49	PASS
Band25	1.4MHz	QPSK	26683	6RB#0	18.48	PASS
Band25	1.4MHz	16QAM	26047	1RB#0	18.50	PASS
Band25	1.4MHz	16QAM	26047	1RB#2	18.51	PASS
Band25	1.4MHz	16QAM	26047	1RB#5	18.51	PASS

Band25	1.4MHz	16QAM	26047	3RB#0	18.23	PASS
Band25	1.4MHz	16QAM	26047	3RB#1	18.25	PASS
Band25	1.4MHz	16QAM	26047	3RB#3	18.25	PASS
Band25	1.4MHz	16QAM	26047	6RB#0	18.26	PASS
Band25	1.4MHz	16QAM	26365	1RB#0	18.64	PASS
Band25	1.4MHz	16QAM	26365	1RB#2	18.66	PASS
Band25	1.4MHz	16QAM	26365	1RB#5	18.66	PASS
Band25	1.4MHz	16QAM	26365	3RB#0	18.30	PASS
Band25	1.4MHz	16QAM	26365	3RB#1	18.30	PASS
Band25	1.4MHz	16QAM	26365	3RB#3	18.28	PASS
Band25	1.4MHz	16QAM	26365	6RB#0	18.45	PASS
Band25	1.4MHz	16QAM	26683	1RB#0	18.64	PASS
Band25	1.4MHz	16QAM	26683	1RB#2	18.69	PASS
Band25	1.4MHz	16QAM	26683	1RB#5	18.64	PASS
Band25	1.4MHz	16QAM	26683	3RB#0	18.40	PASS
Band25	1.4MHz	16QAM	26683	3RB#1	18.39	PASS
Band25	1.4MHz	16QAM	26683	3RB#3	18.41	PASS
Band25	1.4MHz	16QAM	26683	6RB#0	18.33	PASS
Band25	3MHz	QPSK	26055	1RB#0	18.33	PASS
Band25	3MHz	QPSK	26055	1RB#8	18.30	PASS
Band25	3MHz	QPSK	26055	1RB#14	18.22	PASS
Band25	3MHz	QPSK	26055	8RB#0	18.36	PASS
Band25	3MHz	QPSK	26055	8RB#4	18.37	PASS
Band25	3MHz	QPSK	26055	8RB#7	18.29	PASS
Band25	3MHz	QPSK	26055	15RB#0	18.32	PASS
Band25	3MHz	QPSK	26365	1RB#0	18.44	PASS
Band25	3MHz	QPSK	26365	1RB#8	18.44	PASS
Band25	3MHz	QPSK	26365	1RB#14	18.37	PASS
Band25	3MHz	QPSK	26365	8RB#0	18.43	PASS
Band25	3MHz	QPSK	26365	8RB#4	18.42	PASS
Band25	3MHz	QPSK	26365	8RB#7	18.41	PASS
Band25	3MHz	QPSK	26365	15RB#0	18.41	PASS
Band25	3MHz	QPSK	26675	1RB#0	18.57	PASS
Band25	3MHz	QPSK	26675	1RB#8	18.45	PASS
Band25	3MHz	QPSK	26675	1RB#14	18.50	PASS
Band25	3MHz	QPSK	26675	8RB#0	18.49	PASS
Band25	3MHz	QPSK	26675	8RB#4	18.50	PASS

Band25	3MHz	QPSK	26675	8RB#7	18.45	PASS
Band25	3MHz	QPSK	26675	15RB#0	18.51	PASS
Band25	3MHz	16QAM	26055	1RB#0	18.48	PASS
Band25	3MHz	16QAM	26055	1RB#8	18.43	PASS
Band25	3MHz	16QAM	26055	1RB#14	18.40	PASS
Band25	3MHz	16QAM	26055	8RB#0	18.42	PASS
Band25	3MHz	16QAM	26055	8RB#4	18.43	PASS
Band25	3MHz	16QAM	26055	8RB#7	18.37	PASS
Band25	3MHz	16QAM	26055	15RB#0	18.37	PASS
Band25	3MHz	16QAM	26365	1RB#0	18.62	PASS
Band25	3MHz	16QAM	26365	1RB#8	18.61	PASS
Band25	3MHz	16QAM	26365	1RB#14	18.51	PASS
Band25	3MHz	16QAM	26365	8RB#0	18.51	PASS
Band25	3MHz	16QAM	26365	8RB#4	18.52	PASS
Band25	3MHz	16QAM	26365	8RB#7	18.47	PASS
Band25	3MHz	16QAM	26365	15RB#0	18.42	PASS
Band25	3MHz	16QAM	26675	1RB#0	18.77	PASS
Band25	3MHz	16QAM	26675	1RB#8	18.65	PASS
Band25	3MHz	16QAM	26675	1RB#14	18.65	PASS
Band25	3MHz	16QAM	26675	8RB#0	18.57	PASS
Band25	3MHz	16QAM	26675	8RB#4	18.56	PASS
Band25	3MHz	16QAM	26675	8RB#7	18.50	PASS
Band25	3MHz	16QAM	26675	15RB#0	18.46	PASS
Band25	5MHz	QPSK	26065	1RB#0	18.49	PASS
Band25	5MHz	QPSK	26065	1RB#12	18.35	PASS
Band25	5MHz	QPSK	26065	1RB#24	18.33	PASS
Band25	5MHz	QPSK	26065	12RB#0	18.32	PASS
Band25	5MHz	QPSK	26065	12RB#6	18.31	PASS
Band25	5MHz	QPSK	26065	12RB#13	18.22	PASS
Band25	5MHz	QPSK	26065	25RB#0	18.30	PASS
Band25	5MHz	QPSK	26365	1RB#0	18.58	PASS
Band25	5MHz	QPSK	26365	1RB#12	18.56	PASS
Band25	5MHz	QPSK	26365	1RB#24	18.49	PASS
Band25	5MHz	QPSK	26365	12RB#0	18.47	PASS
Band25	5MHz	QPSK	26365	12RB#6	18.48	PASS
Band25	5MHz	QPSK	26365	12RB#13	18.38	PASS
Band25	5MHz	QPSK	26365	25RB#0	18.42	PASS

Band25	5MHz	QPSK	26665	1RB#0	18.67	PASS
Band25	5MHz	QPSK	26665	1RB#12	18.59	PASS
Band25	5MHz	QPSK	26665	1RB#24	18.60	PASS
Band25	5MHz	QPSK	26665	12RB#0	18.60	PASS
Band25	5MHz	QPSK	26665	12RB#6	18.63	PASS
Band25	5MHz	QPSK	26665	12RB#13	18.38	PASS
Band25	5MHz	QPSK	26665	25RB#0	18.50	PASS
Band25	5MHz	16QAM	26065	1RB#0	18.44	PASS
Band25	5MHz	16QAM	26065	1RB#12	18.32	PASS
Band25	5MHz	16QAM	26065	1RB#24	18.31	PASS
Band25	5MHz	16QAM	26065	12RB#0	18.32	PASS
Band25	5MHz	16QAM	26065	12RB#6	18.35	PASS
Band25	5MHz	16QAM	26065	12RB#13	18.22	PASS
Band25	5MHz	16QAM	26065	25RB#0	18.33	PASS
Band25	5MHz	16QAM	26365	1RB#0	18.58	PASS
Band25	5MHz	16QAM	26365	1RB#12	18.52	PASS
Band25	5MHz	16QAM	26365	1RB#24	18.49	PASS
Band25	5MHz	16QAM	26365	12RB#0	18.45	PASS
Band25	5MHz	16QAM	26365	12RB#6	18.50	PASS
Band25	5MHz	16QAM	26365	12RB#13	18.36	PASS
Band25	5MHz	16QAM	26365	25RB#0	18.45	PASS
Band25	5MHz	16QAM	26665	1RB#0	18.76	PASS
Band25	5MHz	16QAM	26665	1RB#12	18.80	PASS
Band25	5MHz	16QAM	26665	1RB#24	18.82	PASS
Band25	5MHz	16QAM	26665	12RB#0	18.62	PASS
Band25	5MHz	16QAM	26665	12RB#6	18.62	PASS
Band25	5MHz	16QAM	26665	12RB#13	18.43	PASS
Band25	5MHz	16QAM	26665	25RB#0	18.50	PASS
Band25	10MHz	QPSK	26090	1RB#0	18.37	PASS
Band25	10MHz	QPSK	26090	1RB#24	18.30	PASS
Band25	10MHz	QPSK	26090	1RB#49	18.14	PASS
Band25	10MHz	QPSK	26090	25RB#0	18.28	PASS
Band25	10MHz	QPSK	26090	25RB#12	18.28	PASS
Band25	10MHz	QPSK	26090	25RB#25	18.23	PASS
Band25	10MHz	QPSK	26090	50RB#0	18.28	PASS
Band25	10MHz	QPSK	26365	1RB#0	18.46	PASS
Band25	10MHz	QPSK	26365	1RB#24	18.55	PASS

Band25	10MHz	QPSK	26365	1RB#49	18.36	PASS
Band25	10MHz	QPSK	26365	25RB#0	18.51	PASS
Band25	10MHz	QPSK	26365	25RB#12	18.50	PASS
Band25	10MHz	QPSK	26365	25RB#25	18.46	PASS
Band25	10MHz	QPSK	26365	50RB#0	18.52	PASS
Band25	10MHz	QPSK	26640	1RB#0	18.55	PASS
Band25	10MHz	QPSK	26640	1RB#24	18.59	PASS
Band25	10MHz	QPSK	26640	1RB#49	18.50	PASS
Band25	10MHz	QPSK	26640	25RB#0	18.56	PASS
Band25	10MHz	QPSK	26640	25RB#12	18.61	PASS
Band25	10MHz	QPSK	26640	25RB#25	18.49	PASS
Band25	10MHz	QPSK	26640	50RB#0	18.56	PASS
Band25	10MHz	16QAM	26090	1RB#0	18.57	PASS
Band25	10MHz	16QAM	26090	1RB#24	18.45	PASS
Band25	10MHz	16QAM	26090	1RB#49	18.33	PASS
Band25	10MHz	16QAM	26090	25RB#0	18.27	PASS
Band25	10MHz	16QAM	26090	25RB#12	18.27	PASS
Band25	10MHz	16QAM	26090	25RB#25	18.29	PASS
Band25	10MHz	16QAM	26090	50RB#0	18.26	PASS
Band25	10MHz	16QAM	26365	1RB#0	18.66	PASS
Band25	10MHz	16QAM	26365	1RB#24	18.67	PASS
Band25	10MHz	16QAM	26365	1RB#49	18.51	PASS
Band25	10MHz	16QAM	26365	25RB#0	18.55	PASS
Band25	10MHz	16QAM	26365	25RB#12	18.55	PASS
Band25	10MHz	16QAM	26365	25RB#25	18.44	PASS
Band25	10MHz	16QAM	26365	50RB#0	18.49	PASS
Band25	10MHz	16QAM	26640	1RB#0	18.75	PASS
Band25	10MHz	16QAM	26640	1RB#24	18.81	PASS
Band25	10MHz	16QAM	26640	1RB#49	18.68	PASS
Band25	10MHz	16QAM	26640	25RB#0	18.63	PASS
Band25	10MHz	16QAM	26640	25RB#12	18.62	PASS
Band25	10MHz	16QAM	26640	25RB#25	18.53	PASS
Band25	10MHz	16QAM	26640	50RB#0	18.58	PASS
Band25	15MHz	QPSK	26115	1RB#0	18.32	PASS
Band25	15MHz	QPSK	26115	1RB#38	18.19	PASS
Band25	15MHz	QPSK	26115	1RB#74	18.03	PASS
Band25	15MHz	QPSK	26115	38RB#0	18.25	PASS

Band25	15MHz	QPSK	26115	38RB#18	18.22	PASS
Band25	15MHz	QPSK	26115	38RB#37	18.23	PASS
Band25	15MHz	QPSK	26115	75RB#0	18.18	PASS
Band25	15MHz	QPSK	26365	1RB#0	18.42	PASS
Band25	15MHz	QPSK	26365	1RB#38	18.46	PASS
Band25	15MHz	QPSK	26365	1RB#74	18.24	PASS
Band25	15MHz	QPSK	26365	38RB#0	18.47	PASS
Band25	15MHz	QPSK	26365	38RB#18	18.47	PASS
Band25	15MHz	QPSK	26365	38RB#37	18.48	PASS
Band25	15MHz	QPSK	26365	75RB#0	18.46	PASS
Band25	15MHz	QPSK	26615	1RB#0	18.34	PASS
Band25	15MHz	QPSK	26615	1RB#38	18.46	PASS
Band25	15MHz	QPSK	26615	1RB#74	18.30	PASS
Band25	15MHz	QPSK	26615	38RB#0	18.50	PASS
Band25	15MHz	QPSK	26615	38RB#18	18.49	PASS
Band25	15MHz	QPSK	26615	38RB#37	18.49	PASS
Band25	15MHz	QPSK	26615	75RB#0	18.51	PASS
Band25	15MHz	16QAM	26115	1RB#0	18.50	PASS
Band25	15MHz	16QAM	26115	1RB#38	18.37	PASS
Band25	15MHz	16QAM	26115	1RB#74	18.25	PASS
Band25	15MHz	16QAM	26115	38RB#0	18.19	PASS
Band25	15MHz	16QAM	26115	38RB#18	18.24	PASS
Band25	15MHz	16QAM	26115	38RB#37	18.24	PASS
Band25	15MHz	16QAM	26115	75RB#0	18.17	PASS
Band25	15MHz	16QAM	26365	1RB#0	18.57	PASS
Band25	15MHz	16QAM	26365	1RB#38	18.66	PASS
Band25	15MHz	16QAM	26365	1RB#74	18.41	PASS
Band25	15MHz	16QAM	26365	38RB#0	18.45	PASS
Band25	15MHz	16QAM	26365	38RB#18	18.48	PASS
Band25	15MHz	16QAM	26365	38RB#37	18.48	PASS
Band25	15MHz	16QAM	26365	75RB#0	18.43	PASS
Band25	15MHz	16QAM	26615	1RB#0	18.48	PASS
Band25	15MHz	16QAM	26615	1RB#38	18.65	PASS
Band25	15MHz	16QAM	26615	1RB#74	18.54	PASS
Band25	15MHz	16QAM	26615	38RB#0	18.47	PASS
Band25	15MHz	16QAM	26615	38RB#18	18.50	PASS
Band25	15MHz	16QAM	26615	38RB#37	18.49	PASS

Band25	15MHz	16QAM	26615	75RB#0	18.44	PASS
Band25	20MHz	QPSK	26140	1RB#0	18.48	PASS
Band25	20MHz	QPSK	26140	1RB#49	18.30	PASS
Band25	20MHz	QPSK	26140	1RB#99	18.29	PASS
Band25	20MHz	QPSK	26140	50RB#0	18.27	PASS
Band25	20MHz	QPSK	26140	50RB#25	18.29	PASS
Band25	20MHz	QPSK	26140	50RB#50	18.21	PASS
Band25	20MHz	QPSK	26140	100RB#0	18.25	PASS
Band25	20MHz	QPSK	26365	1RB#0	18.44	PASS
Band25	20MHz	QPSK	26365	1RB#49	18.54	PASS
Band25	20MHz	QPSK	26365	1RB#99	18.28	PASS
Band25	20MHz	QPSK	26365	50RB#0	18.50	PASS
Band25	20MHz	QPSK	26365	50RB#25	18.84	PASS
Band25	20MHz	QPSK	26365	50RB#50	18.39	PASS
Band25	20MHz	QPSK	26365	100RB#0	18.49	PASS
Band25	20MHz	QPSK	26590	1RB#0	18.36	PASS
Band25	20MHz	QPSK	26590	1RB#49	18.58	PASS
Band25	20MHz	QPSK	26590	1RB#99	18.49	PASS
Band25	20MHz	QPSK	26590	50RB#0	18.52	PASS
Band25	20MHz	QPSK	26590	50RB#25	18.53	PASS
Band25	20MHz	QPSK	26590	50RB#50	18.49	PASS
Band25	20MHz	QPSK	26590	100RB#0	18.50	PASS
Band25	20MHz	16QAM	26140	1RB#0	18.51	PASS
Band25	20MHz	16QAM	26140	1RB#49	18.32	PASS
Band25	20MHz	16QAM	26140	1RB#99	18.24	PASS
Band25	20MHz	16QAM	26140	50RB#0	18.25	PASS
Band25	20MHz	16QAM	26140	50RB#25	18.24	PASS
Band25	20MHz	16QAM	26140	50RB#50	18.20	PASS
Band25	20MHz	16QAM	26140	100RB#0	18.27	PASS
Band25	20MHz	16QAM	26365	1RB#0	18.63	PASS
Band25	20MHz	16QAM	26365	1RB#49	18.59	PASS
Band25	20MHz	16QAM	26365	1RB#99	18.46	PASS
Band25	20MHz	16QAM	26365	50RB#0	18.55	PASS
Band25	20MHz	16QAM	26365	50RB#25	18.53	PASS
Band25	20MHz	16QAM	26365	50RB#50	18.41	PASS
Band25	20MHz	16QAM	26365	100RB#0	18.48	PASS
Band25	20MHz	16QAM	26590	1RB#0	18.41	PASS

Band25	20MHz	16QAM	26590	1RB#49	18.65	PASS
Band25	20MHz	16QAM	26590	1RB#99	18.49	PASS
Band25	20MHz	16QAM	26590	50RB#0	18.49	PASS
Band25	20MHz	16QAM	26590	50RB#25	18.50	PASS
Band25	20MHz	16QAM	26590	50RB#50	18.45	PASS
Band25	20MHz	16QAM	26590	100RB#0	18.47	PASS

LTE(P2)

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Verdict
Band25	1.4MHz	QPSK	26047	1RB#0	12.11	PASS
Band25	1.4MHz	QPSK	26047	1RB#2	12.06	PASS
Band25	1.4MHz	QPSK	26047	1RB#5	12.07	PASS
Band25	1.4MHz	QPSK	26047	3RB#0	12.06	PASS
Band25	1.4MHz	QPSK	26047	3RB#1	12.05	PASS
Band25	1.4MHz	QPSK	26047	3RB#3	12.11	PASS
Band25	1.4MHz	QPSK	26047	6RB#0	12.14	PASS
Band25	1.4MHz	QPSK	26365	1RB#0	12.14	PASS
Band25	1.4MHz	QPSK	26365	1RB#2	12.15	PASS
Band25	1.4MHz	QPSK	26365	1RB#5	12.15	PASS
Band25	1.4MHz	QPSK	26365	3RB#0	12.14	PASS
Band25	1.4MHz	QPSK	26365	3RB#1	12.15	PASS
Band25	1.4MHz	QPSK	26365	3RB#3	12.13	PASS
Band25	1.4MHz	QPSK	26365	6RB#0	12.12	PASS
Band25	1.4MHz	QPSK	26683	1RB#0	12.25	PASS
Band25	1.4MHz	QPSK	26683	1RB#2	12.21	PASS
Band25	1.4MHz	QPSK	26683	1RB#5	12.25	PASS
Band25	1.4MHz	QPSK	26683	3RB#0	12.21	PASS
Band25	1.4MHz	QPSK	26683	3RB#1	12.20	PASS
Band25	1.4MHz	QPSK	26683	3RB#3	12.20	PASS
Band25	1.4MHz	QPSK	26683	6RB#0	12.20	PASS
Band25	1.4MHz	16QAM	26047	1RB#0	12.23	PASS
Band25	1.4MHz	16QAM	26047	1RB#2	12.23	PASS
Band25	1.4MHz	16QAM	26047	1RB#5	12.24	PASS
Band25	1.4MHz	16QAM	26047	3RB#0	11.99	PASS
Band25	1.4MHz	16QAM	26047	3RB#1	12.00	PASS

Band25	1.4MHz	16QAM	26047	3RB#3	12.01	PASS
Band25	1.4MHz	16QAM	26047	6RB#0	12.01	PASS
Band25	1.4MHz	16QAM	26365	1RB#0	12.28	PASS
Band25	1.4MHz	16QAM	26365	1RB#2	12.38	PASS
Band25	1.4MHz	16QAM	26365	1RB#5	12.27	PASS
Band25	1.4MHz	16QAM	26365	3RB#0	12.03	PASS
Band25	1.4MHz	16QAM	26365	3RB#1	12.02	PASS
Band25	1.4MHz	16QAM	26365	3RB#3	12.00	PASS
Band25	1.4MHz	16QAM	26365	6RB#0	12.19	PASS
Band25	1.4MHz	16QAM	26683	1RB#0	12.14	PASS
Band25	1.4MHz	16QAM	26683	1RB#2	12.12	PASS
Band25	1.4MHz	16QAM	26683	1RB#5	12.13	PASS
Band25	1.4MHz	16QAM	26683	3RB#0	12.02	PASS
Band25	1.4MHz	16QAM	26683	3RB#1	12.04	PASS
Band25	1.4MHz	16QAM	26683	3RB#3	12.01	PASS
Band25	1.4MHz	16QAM	26683	6RB#0	12.19	PASS
Band25	3MHz	QPSK	26055	1RB#0	12.07	PASS
Band25	3MHz	QPSK	26055	1RB#8	11.98	PASS
Band25	3MHz	QPSK	26055	1RB#14	11.94	PASS
Band25	3MHz	QPSK	26055	8RB#0	12.10	PASS
Band25	3MHz	QPSK	26055	8RB#4	12.05	PASS
Band25	3MHz	QPSK	26055	8RB#7	12.03	PASS
Band25	3MHz	QPSK	26055	15RB#0	12.05	PASS
Band25	3MHz	QPSK	26365	1RB#0	12.18	PASS
Band25	3MHz	QPSK	26365	1RB#8	12.10	PASS
Band25	3MHz	QPSK	26365	1RB#14	12.10	PASS
Band25	3MHz	QPSK	26365	8RB#0	12.15	PASS
Band25	3MHz	QPSK	26365	8RB#4	12.12	PASS
Band25	3MHz	QPSK	26365	8RB#7	12.11	PASS
Band25	3MHz	QPSK	26365	15RB#0	12.12	PASS
Band25	3MHz	QPSK	26675	1RB#0	12.35	PASS
Band25	3MHz	QPSK	26675	1RB#8	12.16	PASS
Band25	3MHz	QPSK	26675	1RB#14	12.23	PASS
Band25	3MHz	QPSK	26675	8RB#0	12.20	PASS
Band25	3MHz	QPSK	26675	8RB#4	12.23	PASS
Band25	3MHz	QPSK	26675	8RB#7	12.16	PASS
Band25	3MHz	QPSK	26675	15RB#0	12.23	PASS

Band25	3MHz	16QAM	26055	1RB#0	12.27	PASS
Band25	3MHz	16QAM	26055	1RB#8	12.18	PASS
Band25	3MHz	16QAM	26055	1RB#14	12.11	PASS
Band25	3MHz	16QAM	26055	8RB#0	12.15	PASS
Band25	3MHz	16QAM	26055	8RB#4	12.15	PASS
Band25	3MHz	16QAM	26055	8RB#7	12.09	PASS
Band25	3MHz	16QAM	26055	15RB#0	12.08	PASS
Band25	3MHz	16QAM	26365	1RB#0	12.35	PASS
Band25	3MHz	16QAM	26365	1RB#8	12.27	PASS
Band25	3MHz	16QAM	26365	1RB#14	12.25	PASS
Band25	3MHz	16QAM	26365	8RB#0	12.21	PASS
Band25	3MHz	16QAM	26365	8RB#4	12.21	PASS
Band25	3MHz	16QAM	26365	8RB#7	12.20	PASS
Band25	3MHz	16QAM	26365	15RB#0	12.14	PASS
Band25	3MHz	16QAM	26675	1RB#0	12.44	PASS
Band25	3MHz	16QAM	26675	1RB#8	12.37	PASS
Band25	3MHz	16QAM	26675	1RB#14	12.35	PASS
Band25	3MHz	16QAM	26675	8RB#0	12.25	PASS
Band25	3MHz	16QAM	26675	8RB#4	12.25	PASS
Band25	3MHz	16QAM	26675	8RB#7	12.19	PASS
Band25	3MHz	16QAM	26675	15RB#0	12.16	PASS
Band25	5MHz	QPSK	26065	1RB#0	12.19	PASS
Band25	5MHz	QPSK	26065	1RB#12	12.03	PASS
Band25	5MHz	QPSK	26065	1RB#24	12.01	PASS
Band25	5MHz	QPSK	26065	12RB#0	12.10	PASS
Band25	5MHz	QPSK	26065	12RB#6	12.10	PASS
Band25	5MHz	QPSK	26065	12RB#13	11.97	PASS
Band25	5MHz	QPSK	26065	25RB#0	12.02	PASS
Band25	5MHz	QPSK	26365	1RB#0	12.30	PASS
Band25	5MHz	QPSK	26365	1RB#12	12.28	PASS
Band25	5MHz	QPSK	26365	1RB#24	12.18	PASS
Band25	5MHz	QPSK	26365	12RB#0	12.23	PASS
Band25	5MHz	QPSK	26365	12RB#6	12.23	PASS
Band25	5MHz	QPSK	26365	12RB#13	12.12	PASS
Band25	5MHz	QPSK	26365	25RB#0	12.17	PASS
Band25	5MHz	QPSK	26665	1RB#0	12.41	PASS
Band25	5MHz	QPSK	26665	1RB#12	12.28	PASS

Band25	5MHz	QPSK	26665	1RB#24	12.31	PASS
Band25	5MHz	QPSK	26665	12RB#0	12.32	PASS
Band25	5MHz	QPSK	26665	12RB#6	12.34	PASS
Band25	5MHz	QPSK	26665	12RB#13	12.14	PASS
Band25	5MHz	QPSK	26665	25RB#0	12.22	PASS
Band25	5MHz	16QAM	26065	1RB#0	12.18	PASS
Band25	5MHz	16QAM	26065	1RB#12	12.04	PASS
Band25	5MHz	16QAM	26065	1RB#24	12.04	PASS
Band25	5MHz	16QAM	26065	12RB#0	12.04	PASS
Band25	5MHz	16QAM	26065	12RB#6	12.06	PASS
Band25	5MHz	16QAM	26065	12RB#13	11.95	PASS
Band25	5MHz	16QAM	26065	25RB#0	12.06	PASS
Band25	5MHz	16QAM	26365	1RB#0	12.28	PASS
Band25	5MHz	16QAM	26365	1RB#12	12.25	PASS
Band25	5MHz	16QAM	26365	1RB#24	12.16	PASS
Band25	5MHz	16QAM	26365	12RB#0	12.15	PASS
Band25	5MHz	16QAM	26365	12RB#6	12.16	PASS
Band25	5MHz	16QAM	26365	12RB#13	12.15	PASS
Band25	5MHz	16QAM	26365	25RB#0	12.17	PASS
Band25	5MHz	16QAM	26665	1RB#0	12.48	PASS
Band25	5MHz	16QAM	26665	1RB#12	12.48	PASS
Band25	5MHz	16QAM	26665	1RB#24	12.54	PASS
Band25	5MHz	16QAM	26665	12RB#0	12.34	PASS
Band25	5MHz	16QAM	26665	12RB#6	12.37	PASS
Band25	5MHz	16QAM	26665	12RB#13	12.20	PASS
Band25	5MHz	16QAM	26665	25RB#0	12.23	PASS
Band25	10MHz	QPSK	26090	1RB#0	12.11	PASS
Band25	10MHz	QPSK	26090	1RB#24	12.02	PASS
Band25	10MHz	QPSK	26090	1RB#49	11.88	PASS
Band25	10MHz	QPSK	26090	25RB#0	12.00	PASS
Band25	10MHz	QPSK	26090	25RB#12	12.04	PASS
Band25	10MHz	QPSK	26090	25RB#25	11.98	PASS
Band25	10MHz	QPSK	26090	50RB#0	12.03	PASS
Band25	10MHz	QPSK	26365	1RB#0	12.16	PASS
Band25	10MHz	QPSK	26365	1RB#24	12.26	PASS
Band25	10MHz	QPSK	26365	1RB#49	12.09	PASS
Band25	10MHz	QPSK	26365	25RB#0	12.26	PASS

Band25	10MHz	QPSK	26365	25RB#12	12.26	PASS
Band25	10MHz	QPSK	26365	25RB#25	12.19	PASS
Band25	10MHz	QPSK	26365	50RB#0	12.22	PASS
Band25	10MHz	QPSK	26640	1RB#0	12.31	PASS
Band25	10MHz	QPSK	26640	1RB#24	12.34	PASS
Band25	10MHz	QPSK	26640	1RB#49	12.21	PASS
Band25	10MHz	QPSK	26640	25RB#0	12.30	PASS
Band25	10MHz	QPSK	26640	25RB#12	12.33	PASS
Band25	10MHz	QPSK	26640	25RB#25	12.21	PASS
Band25	10MHz	QPSK	26640	50RB#0	12.28	PASS
Band25	10MHz	16QAM	26090	1RB#0	12.25	PASS
Band25	10MHz	16QAM	26090	1RB#24	12.18	PASS
Band25	10MHz	16QAM	26090	1RB#49	12.05	PASS
Band25	10MHz	16QAM	26090	25RB#0	12.07	PASS
Band25	10MHz	16QAM	26090	25RB#12	11.99	PASS
Band25	10MHz	16QAM	26090	25RB#25	12.00	PASS
Band25	10MHz	16QAM	26090	50RB#0	11.96	PASS
Band25	10MHz	16QAM	26365	1RB#0	12.37	PASS
Band25	10MHz	16QAM	26365	1RB#24	12.39	PASS
Band25	10MHz	16QAM	26365	1RB#49	12.29	PASS
Band25	10MHz	16QAM	26365	25RB#0	12.30	PASS
Band25	10MHz	16QAM	26365	25RB#12	12.30	PASS
Band25	10MHz	16QAM	26365	25RB#25	12.19	PASS
Band25	10MHz	16QAM	26365	50RB#0	12.26	PASS
Band25	10MHz	16QAM	26640	1RB#0	12.45	PASS
Band25	10MHz	16QAM	26640	1RB#24	12.49	PASS
Band25	10MHz	16QAM	26640	1RB#49	12.31	PASS
Band25	10MHz	16QAM	26640	25RB#0	12.40	PASS
Band25	10MHz	16QAM	26640	25RB#12	12.34	PASS
Band25	10MHz	16QAM	26640	25RB#25	12.26	PASS
Band25	10MHz	16QAM	26640	50RB#0	12.28	PASS
Band25	15MHz	QPSK	26115	1RB#0	12.08	PASS
Band25	15MHz	QPSK	26115	1RB#38	11.95	PASS
Band25	15MHz	QPSK	26115	1RB#74	11.81	PASS
Band25	15MHz	QPSK	26115	38RB#0	11.97	PASS
Band25	15MHz	QPSK	26115	38RB#18	11.95	PASS
Band25	15MHz	QPSK	26115	38RB#37	11.95	PASS

Band25	15MHz	QPSK	26115	75RB#0	11.95	PASS
Band25	15MHz	QPSK	26365	1RB#0	12.17	PASS
Band25	15MHz	QPSK	26365	1RB#38	12.19	PASS
Band25	15MHz	QPSK	26365	1RB#74	11.97	PASS
Band25	15MHz	QPSK	26365	38RB#0	12.17	PASS
Band25	15MHz	QPSK	26365	38RB#18	12.18	PASS
Band25	15MHz	QPSK	26365	38RB#37	12.18	PASS
Band25	15MHz	QPSK	26365	75RB#0	12.18	PASS
Band25	15MHz	QPSK	26615	1RB#0	12.08	PASS
Band25	15MHz	QPSK	26615	1RB#38	12.22	PASS
Band25	15MHz	QPSK	26615	1RB#74	12.05	PASS
Band25	15MHz	QPSK	26615	38RB#0	12.21	PASS
Band25	15MHz	QPSK	26615	38RB#18	12.22	PASS
Band25	15MHz	QPSK	26615	38RB#37	12.21	PASS
Band25	15MHz	QPSK	26615	75RB#0	12.24	PASS
Band25	15MHz	16QAM	26115	1RB#0	12.26	PASS
Band25	15MHz	16QAM	26115	1RB#38	12.13	PASS
Band25	15MHz	16QAM	26115	1RB#74	11.99	PASS
Band25	15MHz	16QAM	26115	38RB#0	11.97	PASS
Band25	15MHz	16QAM	26115	38RB#18	11.95	PASS
Band25	15MHz	16QAM	26115	38RB#37	11.96	PASS
Band25	15MHz	16QAM	26115	75RB#0	11.91	PASS
Band25	15MHz	16QAM	26365	1RB#0	12.32	PASS
Band25	15MHz	16QAM	26365	1RB#38	12.37	PASS
Band25	15MHz	16QAM	26365	1RB#74	12.19	PASS
Band25	15MHz	16QAM	26365	38RB#0	12.17	PASS
Band25	15MHz	16QAM	26365	38RB#18	12.18	PASS
Band25	15MHz	16QAM	26365	38RB#37	12.18	PASS
Band25	15MHz	16QAM	26365	75RB#0	12.13	PASS
Band25	15MHz	16QAM	26615	1RB#0	12.22	PASS
Band25	15MHz	16QAM	26615	1RB#38	12.42	PASS
Band25	15MHz	16QAM	26615	1RB#74	12.23	PASS
Band25	15MHz	16QAM	26615	38RB#0	12.23	PASS
Band25	15MHz	16QAM	26615	38RB#18	12.22	PASS
Band25	15MHz	16QAM	26615	38RB#37	12.23	PASS
Band25	15MHz	16QAM	26615	75RB#0	12.19	PASS
Band25	20MHz	QPSK	26140	1RB#0	12.22	PASS

Band25	20MHz	QPSK	26140	1RB#49	12.03	PASS
Band25	20MHz	QPSK	26140	1RB#99	11.98	PASS
Band25	20MHz	QPSK	26140	50RB#0	12.06	PASS
Band25	20MHz	QPSK	26140	50RB#25	12.05	PASS
Band25	20MHz	QPSK	26140	50RB#50	11.93	PASS
Band25	20MHz	QPSK	26140	100RB#0	12.01	PASS
Band25	20MHz	QPSK	26365	1RB#0	12.19	PASS
Band25	20MHz	QPSK	26365	1RB#49	12.56	PASS
Band25	20MHz	QPSK	26365	1RB#99	11.98	PASS
Band25	20MHz	QPSK	26365	50RB#0	12.24	PASS
Band25	20MHz	QPSK	26365	50RB#25	12.25	PASS
Band25	20MHz	QPSK	26365	50RB#50	12.13	PASS
Band25	20MHz	QPSK	26365	100RB#0	12.19	PASS
Band25	20MHz	QPSK	26590	1RB#0	12.12	PASS
Band25	20MHz	QPSK	26590	1RB#49	12.33	PASS
Band25	20MHz	QPSK	26590	1RB#99	12.22	PASS
Band25	20MHz	QPSK	26590	50RB#0	12.26	PASS
Band25	20MHz	QPSK	26590	50RB#25	12.30	PASS
Band25	20MHz	QPSK	26590	50RB#50	12.25	PASS
Band25	20MHz	QPSK	26590	100RB#0	12.25	PASS
Band25	20MHz	16QAM	26140	1RB#0	12.23	PASS
Band25	20MHz	16QAM	26140	1RB#49	12.03	PASS
Band25	20MHz	16QAM	26140	1RB#99	11.95	PASS
Band25	20MHz	16QAM	26140	50RB#0	12.04	PASS
Band25	20MHz	16QAM	26140	50RB#25	12.04	PASS
Band25	20MHz	16QAM	26140	50RB#50	11.95	PASS
Band25	20MHz	16QAM	26140	100RB#0	12.00	PASS
Band25	20MHz	16QAM	26365	1RB#0	12.32	PASS
Band25	20MHz	16QAM	26365	1RB#49	12.28	PASS
Band25	20MHz	16QAM	26365	1RB#99	12.21	PASS
Band25	20MHz	16QAM	26365	50RB#0	12.30	PASS
Band25	20MHz	16QAM	26365	50RB#25	12.26	PASS
Band25	20MHz	16QAM	26365	50RB#50	12.17	PASS
Band25	20MHz	16QAM	26365	100RB#0	12.23	PASS
Band25	20MHz	16QAM	26590	1RB#0	12.07	PASS
Band25	20MHz	16QAM	26590	1RB#49	12.32	PASS
Band25	20MHz	16QAM	26590	1RB#99	12.21	PASS

Band25	20MHz	16QAM	26590	50RB#0	12.25	PASS
Band25	20MHz	16QAM	26590	50RB#25	12.24	PASS
Band25	20MHz	16QAM	26590	50RB#50	12.21	PASS
Band25	20MHz	16QAM	26590	100RB#0	12.25	PASS

LTE(P3)

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Verdict
Band25	1.4MHz	QPSK	26047	1RB#0	17.28	PASS
Band25	1.4MHz	QPSK	26047	1RB#2	17.20	PASS
Band25	1.4MHz	QPSK	26047	1RB#5	17.30	PASS
Band25	1.4MHz	QPSK	26047	3RB#0	17.21	PASS
Band25	1.4MHz	QPSK	26047	3RB#1	17.22	PASS
Band25	1.4MHz	QPSK	26047	3RB#3	17.25	PASS
Band25	1.4MHz	QPSK	26047	6RB#0	17.25	PASS
Band25	1.4MHz	QPSK	26365	1RB#0	17.39	PASS
Band25	1.4MHz	QPSK	26365	1RB#2	17.33	PASS
Band25	1.4MHz	QPSK	26365	1RB#5	17.37	PASS
Band25	1.4MHz	QPSK	26365	3RB#0	17.28	PASS
Band25	1.4MHz	QPSK	26365	3RB#1	17.28	PASS
Band25	1.4MHz	QPSK	26365	3RB#3	17.31	PASS
Band25	1.4MHz	QPSK	26365	6RB#0	17.34	PASS
Band25	1.4MHz	QPSK	26683	1RB#0	17.38	PASS
Band25	1.4MHz	QPSK	26683	1RB#2	17.32	PASS
Band25	1.4MHz	QPSK	26683	1RB#5	17.30	PASS
Band25	1.4MHz	QPSK	26683	3RB#0	17.33	PASS
Band25	1.4MHz	QPSK	26683	3RB#1	17.36	PASS
Band25	1.4MHz	QPSK	26683	3RB#3	17.33	PASS
Band25	1.4MHz	QPSK	26683	6RB#0	17.38	PASS
Band25	1.4MHz	16QAM	26047	1RB#0	17.42	PASS
Band25	1.4MHz	16QAM	26047	1RB#2	17.41	PASS
Band25	1.4MHz	16QAM	26047	1RB#5	17.42	PASS
Band25	1.4MHz	16QAM	26047	3RB#0	17.12	PASS
Band25	1.4MHz	16QAM	26047	3RB#1	17.14	PASS
Band25	1.4MHz	16QAM	26047	3RB#3	17.16	PASS
Band25	1.4MHz	16QAM	26047	6RB#0	17.16	PASS

Band25	1.4MHz	16QAM	26365	1RB#0	17.48	PASS
Band25	1.4MHz	16QAM	26365	1RB#2	17.54	PASS
Band25	1.4MHz	16QAM	26365	1RB#5	17.50	PASS
Band25	1.4MHz	16QAM	26365	3RB#0	17.21	PASS
Band25	1.4MHz	16QAM	26365	3RB#1	17.19	PASS
Band25	1.4MHz	16QAM	26365	3RB#3	17.20	PASS
Band25	1.4MHz	16QAM	26365	6RB#0	17.19	PASS
Band25	1.4MHz	16QAM	26683	1RB#0	17.54	PASS
Band25	1.4MHz	16QAM	26683	1RB#2	17.51	PASS
Band25	1.4MHz	16QAM	26683	1RB#5	17.48	PASS
Band25	1.4MHz	16QAM	26683	3RB#0	17.23	PASS
Band25	1.4MHz	16QAM	26683	3RB#1	17.23	PASS
Band25	1.4MHz	16QAM	26683	3RB#3	17.22	PASS
Band25	1.4MHz	16QAM	26683	6RB#0	17.41	PASS
Band25	3MHz	QPSK	26055	1RB#0	17.22	PASS
Band25	3MHz	QPSK	26055	1RB#8	17.14	PASS
Band25	3MHz	QPSK	26055	1RB#14	17.10	PASS
Band25	3MHz	QPSK	26055	8RB#0	17.24	PASS
Band25	3MHz	QPSK	26055	8RB#4	17.24	PASS
Band25	3MHz	QPSK	26055	8RB#7	17.18	PASS
Band25	3MHz	QPSK	26055	15RB#0	17.19	PASS
Band25	3MHz	QPSK	26365	1RB#0	17.32	PASS
Band25	3MHz	QPSK	26365	1RB#8	17.29	PASS
Band25	3MHz	QPSK	26365	1RB#14	17.23	PASS
Band25	3MHz	QPSK	26365	8RB#0	17.28	PASS
Band25	3MHz	QPSK	26365	8RB#4	17.30	PASS
Band25	3MHz	QPSK	26365	8RB#7	17.28	PASS
Band25	3MHz	QPSK	26365	15RB#0	17.27	PASS
Band25	3MHz	QPSK	26675	1RB#0	17.45	PASS
Band25	3MHz	QPSK	26675	1RB#8	17.32	PASS
Band25	3MHz	QPSK	26675	1RB#14	17.31	PASS
Band25	3MHz	QPSK	26675	8RB#0	17.35	PASS
Band25	3MHz	QPSK	26675	8RB#4	17.35	PASS
Band25	3MHz	QPSK	26675	8RB#7	17.30	PASS
Band25	3MHz	QPSK	26675	15RB#0	17.35	PASS
Band25	3MHz	16QAM	26055	1RB#0	17.38	PASS
Band25	3MHz	16QAM	26055	1RB#8	17.35	PASS

Band25	3MHz	16QAM	26055	1RB#14	17.29	PASS
Band25	3MHz	16QAM	26055	8RB#0	17.33	PASS
Band25	3MHz	16QAM	26055	8RB#4	17.31	PASS
Band25	3MHz	16QAM	26055	8RB#7	17.27	PASS
Band25	3MHz	16QAM	26055	15RB#0	17.23	PASS
Band25	3MHz	16QAM	26365	1RB#0	17.49	PASS
Band25	3MHz	16QAM	26365	1RB#8	17.45	PASS
Band25	3MHz	16QAM	26365	1RB#14	17.37	PASS
Band25	3MHz	16QAM	26365	8RB#0	17.39	PASS
Band25	3MHz	16QAM	26365	8RB#4	17.40	PASS
Band25	3MHz	16QAM	26365	8RB#7	17.33	PASS
Band25	3MHz	16QAM	26365	15RB#0	17.27	PASS
Band25	3MHz	16QAM	26675	1RB#0	17.65	PASS
Band25	3MHz	16QAM	26675	1RB#8	17.48	PASS
Band25	3MHz	16QAM	26675	1RB#14	17.49	PASS
Band25	3MHz	16QAM	26675	8RB#0	17.42	PASS
Band25	3MHz	16QAM	26675	8RB#4	17.39	PASS
Band25	3MHz	16QAM	26675	8RB#7	17.37	PASS
Band25	3MHz	16QAM	26675	15RB#0	17.34	PASS
Band25	5MHz	QPSK	26065	1RB#0	17.38	PASS
Band25	5MHz	QPSK	26065	1RB#12	17.26	PASS
Band25	5MHz	QPSK	26065	1RB#24	17.25	PASS
Band25	5MHz	QPSK	26065	12RB#0	17.24	PASS
Band25	5MHz	QPSK	26065	12RB#6	17.25	PASS
Band25	5MHz	QPSK	26065	12RB#13	17.16	PASS
Band25	5MHz	QPSK	26065	25RB#0	17.16	PASS
Band25	5MHz	QPSK	26365	1RB#0	17.48	PASS
Band25	5MHz	QPSK	26365	1RB#12	17.43	PASS
Band25	5MHz	QPSK	26365	1RB#24	17.38	PASS
Band25	5MHz	QPSK	26365	12RB#0	17.39	PASS
Band25	5MHz	QPSK	26365	12RB#6	17.36	PASS
Band25	5MHz	QPSK	26365	12RB#13	17.28	PASS
Band25	5MHz	QPSK	26365	25RB#0	17.32	PASS
Band25	5MHz	QPSK	26665	1RB#0	17.53	PASS
Band25	5MHz	QPSK	26665	1RB#12	17.45	PASS
Band25	5MHz	QPSK	26665	1RB#24	17.48	PASS
Band25	5MHz	QPSK	26665	12RB#0	17.46	PASS

Band25	5MHz	QPSK	26665	12RB#6	17.49	PASS
Band25	5MHz	QPSK	26665	12RB#13	17.28	PASS
Band25	5MHz	QPSK	26665	25RB#0	17.36	PASS
Band25	5MHz	16QAM	26065	1RB#0	17.37	PASS
Band25	5MHz	16QAM	26065	1RB#12	17.22	PASS
Band25	5MHz	16QAM	26065	1RB#24	17.20	PASS
Band25	5MHz	16QAM	26065	12RB#0	17.27	PASS
Band25	5MHz	16QAM	26065	12RB#6	17.24	PASS
Band25	5MHz	16QAM	26065	12RB#13	17.14	PASS
Band25	5MHz	16QAM	26065	25RB#0	17.24	PASS
Band25	5MHz	16QAM	26365	1RB#0	17.46	PASS
Band25	5MHz	16QAM	26365	1RB#12	17.37	PASS
Band25	5MHz	16QAM	26365	1RB#24	17.37	PASS
Band25	5MHz	16QAM	26365	12RB#0	17.34	PASS
Band25	5MHz	16QAM	26365	12RB#6	17.36	PASS
Band25	5MHz	16QAM	26365	12RB#13	17.27	PASS
Band25	5MHz	16QAM	26365	25RB#0	17.37	PASS
Band25	5MHz	16QAM	26665	1RB#0	17.66	PASS
Band25	5MHz	16QAM	26665	1RB#12	17.65	PASS
Band25	5MHz	16QAM	26665	1RB#24	17.67	PASS
Band25	5MHz	16QAM	26665	12RB#0	17.54	PASS
Band25	5MHz	16QAM	26665	12RB#6	17.54	PASS
Band25	5MHz	16QAM	26665	12RB#13	17.29	PASS
Band25	5MHz	16QAM	26665	25RB#0	17.36	PASS
Band25	10MHz	QPSK	26090	1RB#0	17.30	PASS
Band25	10MHz	QPSK	26090	1RB#24	17.13	PASS
Band25	10MHz	QPSK	26090	1RB#49	17.04	PASS
Band25	10MHz	QPSK	26090	25RB#0	17.23	PASS
Band25	10MHz	QPSK	26090	25RB#12	17.16	PASS
Band25	10MHz	QPSK	26090	25RB#25	17.15	PASS
Band25	10MHz	QPSK	26090	50RB#0	17.18	PASS
Band25	10MHz	QPSK	26365	1RB#0	17.36	PASS
Band25	10MHz	QPSK	26365	1RB#24	17.38	PASS
Band25	10MHz	QPSK	26365	1RB#49	17.24	PASS
Band25	10MHz	QPSK	26365	25RB#0	17.42	PASS
Band25	10MHz	QPSK	26365	25RB#12	17.43	PASS
Band25	10MHz	QPSK	26365	25RB#25	17.33	PASS

Band25	10MHz	QPSK	26365	50RB#0	17.39	PASS
Band25	10MHz	QPSK	26640	1RB#0	17.47	PASS
Band25	10MHz	QPSK	26640	1RB#24	17.50	PASS
Band25	10MHz	QPSK	26640	1RB#49	17.36	PASS
Band25	10MHz	QPSK	26640	25RB#0	17.47	PASS
Band25	10MHz	QPSK	26640	25RB#12	17.47	PASS
Band25	10MHz	QPSK	26640	25RB#25	17.38	PASS
Band25	10MHz	QPSK	26640	50RB#0	17.44	PASS
Band25	10MHz	16QAM	26090	1RB#0	17.47	PASS
Band25	10MHz	16QAM	26090	1RB#24	17.34	PASS
Band25	10MHz	16QAM	26090	1RB#49	17.22	PASS
Band25	10MHz	16QAM	26090	25RB#0	17.21	PASS
Band25	10MHz	16QAM	26090	25RB#12	17.20	PASS
Band25	10MHz	16QAM	26090	25RB#25	17.13	PASS
Band25	10MHz	16QAM	26090	50RB#0	17.15	PASS
Band25	10MHz	16QAM	26365	1RB#0	17.53	PASS
Band25	10MHz	16QAM	26365	1RB#24	17.55	PASS
Band25	10MHz	16QAM	26365	1RB#49	17.41	PASS
Band25	10MHz	16QAM	26365	25RB#0	17.40	PASS
Band25	10MHz	16QAM	26365	25RB#12	17.41	PASS
Band25	10MHz	16QAM	26365	25RB#25	17.33	PASS
Band25	10MHz	16QAM	26365	50RB#0	17.40	PASS
Band25	10MHz	16QAM	26640	1RB#0	17.64	PASS
Band25	10MHz	16QAM	26640	1RB#24	17.65	PASS
Band25	10MHz	16QAM	26640	1RB#49	17.50	PASS
Band25	10MHz	16QAM	26640	25RB#0	17.51	PASS
Band25	10MHz	16QAM	26640	25RB#12	17.50	PASS
Band25	10MHz	16QAM	26640	25RB#25	17.38	PASS
Band25	10MHz	16QAM	26640	50RB#0	17.45	PASS
Band25	15MHz	QPSK	26115	1RB#0	17.19	PASS
Band25	15MHz	QPSK	26115	1RB#38	17.08	PASS
Band25	15MHz	QPSK	26115	1RB#74	16.94	PASS
Band25	15MHz	QPSK	26115	38RB#0	17.13	PASS
Band25	15MHz	QPSK	26115	38RB#18	17.12	PASS
Band25	15MHz	QPSK	26115	38RB#37	17.12	PASS
Band25	15MHz	QPSK	26115	75RB#0	17.12	PASS
Band25	15MHz	QPSK	26365	1RB#0	17.29	PASS

Band25	15MHz	QPSK	26365	1RB#38	17.35	PASS
Band25	15MHz	QPSK	26365	1RB#74	17.07	PASS
Band25	15MHz	QPSK	26365	38RB#0	17.37	PASS
Band25	15MHz	QPSK	26365	38RB#18	17.33	PASS
Band25	15MHz	QPSK	26365	38RB#37	17.32	PASS
Band25	15MHz	QPSK	26365	75RB#0	17.33	PASS
Band25	15MHz	QPSK	26615	1RB#0	17.19	PASS
Band25	15MHz	QPSK	26615	1RB#38	17.36	PASS
Band25	15MHz	QPSK	26615	1RB#74	17.19	PASS
Band25	15MHz	QPSK	26615	38RB#0	17.38	PASS
Band25	15MHz	QPSK	26615	38RB#18	17.37	PASS
Band25	15MHz	QPSK	26615	38RB#37	17.34	PASS
Band25	15MHz	QPSK	26615	75RB#0	17.35	PASS
Band25	15MHz	16QAM	26115	1RB#0	17.42	PASS
Band25	15MHz	16QAM	26115	1RB#38	17.25	PASS
Band25	15MHz	16QAM	26115	1RB#74	17.13	PASS
Band25	15MHz	16QAM	26115	38RB#0	17.12	PASS
Band25	15MHz	16QAM	26115	38RB#18	17.12	PASS
Band25	15MHz	16QAM	26115	38RB#37	17.12	PASS
Band25	15MHz	16QAM	26115	75RB#0	17.03	PASS
Band25	15MHz	16QAM	26365	1RB#0	17.49	PASS
Band25	15MHz	16QAM	26365	1RB#38	17.54	PASS
Band25	15MHz	16QAM	26365	1RB#74	17.30	PASS
Band25	15MHz	16QAM	26365	38RB#0	17.34	PASS
Band25	15MHz	16QAM	26365	38RB#18	17.33	PASS
Band25	15MHz	16QAM	26365	38RB#37	17.33	PASS
Band25	15MHz	16QAM	26365	75RB#0	17.31	PASS
Band25	15MHz	16QAM	26615	1RB#0	17.38	PASS
Band25	15MHz	16QAM	26615	1RB#38	17.54	PASS
Band25	15MHz	16QAM	26615	1RB#74	17.40	PASS
Band25	15MHz	16QAM	26615	38RB#0	17.34	PASS
Band25	15MHz	16QAM	26615	38RB#18	17.37	PASS
Band25	15MHz	16QAM	26615	38RB#37	17.36	PASS
Band25	15MHz	16QAM	26615	75RB#0	17.32	PASS
Band25	20MHz	QPSK	26140	1RB#0	17.38	PASS
Band25	20MHz	QPSK	26140	1RB#49	17.19	PASS
Band25	20MHz	QPSK	26140	1RB#99	17.17	PASS

Band25	20MHz	QPSK	26140	50RB#0	17.24	PASS
Band25	20MHz	QPSK	26140	50RB#25	17.17	PASS
Band25	20MHz	QPSK	26140	50RB#50	17.12	PASS
Band25	20MHz	QPSK	26140	100RB#0	17.20	PASS
Band25	20MHz	QPSK	26365	1RB#0	17.31	PASS
Band25	20MHz	QPSK	26365	1RB#49	17.42	PASS
Band25	20MHz	QPSK	26365	1RB#99	17.18	PASS
Band25	20MHz	QPSK	26365	50RB#0	17.44	PASS
Band25	20MHz	QPSK	26365	50RB#25	17.72	PASS
Band25	20MHz	QPSK	26365	50RB#50	17.26	PASS
Band25	20MHz	QPSK	26365	100RB#0	17.35	PASS
Band25	20MHz	QPSK	26590	1RB#0	17.26	PASS
Band25	20MHz	QPSK	26590	1RB#49	17.48	PASS
Band25	20MHz	QPSK	26590	1RB#99	17.36	PASS
Band25	20MHz	QPSK	26590	50RB#0	17.41	PASS
Band25	20MHz	QPSK	26590	50RB#25	17.41	PASS
Band25	20MHz	QPSK	26590	50RB#50	17.35	PASS
Band25	20MHz	QPSK	26590	100RB#0	17.38	PASS
Band25	20MHz	16QAM	26140	1RB#0	17.40	PASS
Band25	20MHz	16QAM	26140	1RB#49	17.24	PASS
Band25	20MHz	16QAM	26140	1RB#99	17.17	PASS
Band25	20MHz	16QAM	26140	50RB#0	17.17	PASS
Band25	20MHz	16QAM	26140	50RB#25	17.20	PASS
Band25	20MHz	16QAM	26140	50RB#50	17.13	PASS
Band25	20MHz	16QAM	26140	100RB#0	17.15	PASS
Band25	20MHz	16QAM	26365	1RB#0	17.55	PASS
Band25	20MHz	16QAM	26365	1RB#49	17.43	PASS
Band25	20MHz	16QAM	26365	1RB#99	17.38	PASS
Band25	20MHz	16QAM	26365	50RB#0	17.43	PASS
Band25	20MHz	16QAM	26365	50RB#25	17.41	PASS
Band25	20MHz	16QAM	26365	50RB#50	17.31	PASS
Band25	20MHz	16QAM	26365	100RB#0	17.37	PASS
Band25	20MHz	16QAM	26590	1RB#0	17.27	PASS
Band25	20MHz	16QAM	26590	1RB#49	17.52	PASS
Band25	20MHz	16QAM	26590	1RB#99	17.37	PASS
Band25	20MHz	16QAM	26590	50RB#0	17.36	PASS
Band25	20MHz	16QAM	26590	50RB#25	17.39	PASS

Band25	20MHz	16QAM	26590	50RB#50	17.38	PASS
Band25	20MHz	16QAM	26590	100RB#0	17.37	PASS

Band 26(814-824MHz)

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Verdict
Band26	1.4MHz	QPSK	26697	1RB#0	22.32	PASS
Band26	1.4MHz	QPSK	26697	1RB#2	22.26	PASS
Band26	1.4MHz	QPSK	26697	1RB#5	22.31	PASS
Band26	1.4MHz	QPSK	26697	3RB#0	22.37	PASS
Band26	1.4MHz	QPSK	26697	3RB#1	22.39	PASS
Band26	1.4MHz	QPSK	26697	3RB#3	22.35	PASS
Band26	1.4MHz	QPSK	26697	6RB#0	21.35	PASS
Band26	1.4MHz	QPSK	26740	1RB#0	22.30	PASS
Band26	1.4MHz	QPSK	26740	1RB#2	22.27	PASS
Band26	1.4MHz	QPSK	26740	1RB#5	22.25	PASS
Band26	1.4MHz	QPSK	26740	3RB#0	22.32	PASS
Band26	1.4MHz	QPSK	26740	3RB#1	22.31	PASS
Band26	1.4MHz	QPSK	26740	3RB#3	22.29	PASS
Band26	1.4MHz	QPSK	26740	6RB#0	21.34	PASS
Band26	1.4MHz	QPSK	26783	1RB#0	22.17	PASS
Band26	1.4MHz	QPSK	26783	1RB#2	22.12	PASS
Band26	1.4MHz	QPSK	26783	1RB#5	22.21	PASS
Band26	1.4MHz	QPSK	26783	3RB#0	22.25	PASS
Band26	1.4MHz	QPSK	26783	3RB#1	22.24	PASS
Band26	1.4MHz	QPSK	26783	3RB#3	22.21	PASS
Band26	1.4MHz	QPSK	26783	6RB#0	21.23	PASS
Band26	1.4MHz	16QAM	26697	1RB#0	21.45	PASS
Band26	1.4MHz	16QAM	26697	1RB#2	21.48	PASS
Band26	1.4MHz	16QAM	26697	1RB#5	21.39	PASS
Band26	1.4MHz	16QAM	26697	3RB#0	21.28	PASS
Band26	1.4MHz	16QAM	26697	3RB#1	21.31	PASS
Band26	1.4MHz	16QAM	26697	3RB#3	21.24	PASS
Band26	1.4MHz	16QAM	26697	6RB#0	21.43	PASS
Band26	1.4MHz	16QAM	26740	1RB#0	21.22	PASS
Band26	1.4MHz	16QAM	26740	1RB#2	21.24	PASS

Band26	1.4MHz	16QAM	26740	1RB#5	21.22	PASS
Band26	1.4MHz	16QAM	26740	3RB#0	21.29	PASS
Band26	1.4MHz	16QAM	26740	3RB#1	21.31	PASS
Band26	1.4MHz	16QAM	26740	3RB#3	21.24	PASS
Band26	1.4MHz	16QAM	26740	6RB#0	21.36	PASS
Band26	1.4MHz	16QAM	26783	1RB#0	21.32	PASS
Band26	1.4MHz	16QAM	26783	1RB#2	21.37	PASS
Band26	1.4MHz	16QAM	26783	1RB#5	21.33	PASS
Band26	1.4MHz	16QAM	26783	3RB#0	21.17	PASS
Band26	1.4MHz	16QAM	26783	3RB#1	21.15	PASS
Band26	1.4MHz	16QAM	26783	3RB#3	21.10	PASS
Band26	1.4MHz	16QAM	26783	6RB#0	21.30	PASS
Band26	3MHz	QPSK	26705	1RB#0	22.43	PASS
Band26	3MHz	QPSK	26705	1RB#8	22.39	PASS
Band26	3MHz	QPSK	26705	1RB#14	22.34	PASS
Band26	3MHz	QPSK	26705	8RB#0	21.34	PASS
Band26	3MHz	QPSK	26705	8RB#4	21.34	PASS
Band26	3MHz	QPSK	26705	8RB#7	21.36	PASS
Band26	3MHz	QPSK	26705	15RB#0	21.32	PASS
Band26	3MHz	QPSK	26740	1RB#0	22.30	PASS
Band26	3MHz	QPSK	26740	1RB#8	22.26	PASS
Band26	3MHz	QPSK	26740	1RB#14	22.25	PASS
Band26	3MHz	QPSK	26740	8RB#0	21.32	PASS
Band26	3MHz	QPSK	26740	8RB#4	21.31	PASS
Band26	3MHz	QPSK	26740	8RB#7	21.31	PASS
Band26	3MHz	QPSK	26740	15RB#0	21.33	PASS
Band26	3MHz	QPSK	26775	1RB#0	22.28	PASS
Band26	3MHz	QPSK	26775	1RB#8	22.29	PASS
Band26	3MHz	QPSK	26775	1RB#14	22.31	PASS
Band26	3MHz	QPSK	26775	8RB#0	21.22	PASS
Band26	3MHz	QPSK	26775	8RB#4	21.20	PASS
Band26	3MHz	QPSK	26775	8RB#7	21.19	PASS
Band26	3MHz	QPSK	26775	15RB#0	21.23	PASS
Band26	3MHz	16QAM	26705	1RB#0	21.60	PASS
Band26	3MHz	16QAM	26705	1RB#8	21.55	PASS
Band26	3MHz	16QAM	26705	1RB#14	21.50	PASS
Band26	3MHz	16QAM	26705	8RB#0	21.39	PASS

Band26	3MHz	16QAM	26705	8RB#4	21.40	PASS
Band26	3MHz	16QAM	26705	8RB#7	21.39	PASS
Band26	3MHz	16QAM	26705	15RB#0	21.36	PASS
Band26	3MHz	16QAM	26740	1RB#0	21.54	PASS
Band26	3MHz	16QAM	26740	1RB#8	21.47	PASS
Band26	3MHz	16QAM	26740	1RB#14	21.44	PASS
Band26	3MHz	16QAM	26740	8RB#0	21.32	PASS
Band26	3MHz	16QAM	26740	8RB#4	21.29	PASS
Band26	3MHz	16QAM	26740	8RB#7	21.31	PASS
Band26	3MHz	16QAM	26740	15RB#0	21.27	PASS
Band26	3MHz	16QAM	26775	1RB#0	21.46	PASS
Band26	3MHz	16QAM	26775	1RB#8	21.45	PASS
Band26	3MHz	16QAM	26775	1RB#14	21.44	PASS
Band26	3MHz	16QAM	26775	8RB#0	21.29	PASS
Band26	3MHz	16QAM	26775	8RB#4	21.29	PASS
Band26	3MHz	16QAM	26775	8RB#7	21.29	PASS
Band26	3MHz	16QAM	26775	15RB#0	21.26	PASS
Band26	5MHz	QPSK	26715	1RB#0	22.56	PASS
Band26	5MHz	QPSK	26715	1RB#12	22.52	PASS
Band26	5MHz	QPSK	26715	1RB#24	22.52	PASS
Band26	5MHz	QPSK	26715	12RB#0	21.38	PASS
Band26	5MHz	QPSK	26715	12RB#6	21.34	PASS
Band26	5MHz	QPSK	26715	12RB#13	21.37	PASS
Band26	5MHz	QPSK	26715	25RB#0	21.37	PASS
Band26	5MHz	QPSK	26740	1RB#0	22.48	PASS
Band26	5MHz	QPSK	26740	1RB#12	22.47	PASS
Band26	5MHz	QPSK	26740	1RB#24	22.46	PASS
Band26	5MHz	QPSK	26740	12RB#0	21.38	PASS
Band26	5MHz	QPSK	26740	12RB#6	21.39	PASS
Band26	5MHz	QPSK	26740	12RB#13	21.30	PASS
Band26	5MHz	QPSK	26740	25RB#0	21.39	PASS
Band26	5MHz	QPSK	26765	1RB#0	22.43	PASS
Band26	5MHz	QPSK	26765	1RB#12	22.41	PASS
Band26	5MHz	QPSK	26765	1RB#24	22.46	PASS
Band26	5MHz	QPSK	26765	12RB#0	21.27	PASS
Band26	5MHz	QPSK	26765	12RB#6	21.29	PASS
Band26	5MHz	QPSK	26765	12RB#13	21.25	PASS

Band26	5MHz	QPSK	26765	25RB#0	21.28	PASS
Band26	5MHz	16QAM	26715	1RB#0	21.44	PASS
Band26	5MHz	16QAM	26715	1RB#12	21.38	PASS
Band26	5MHz	16QAM	26715	1RB#24	21.38	PASS
Band26	5MHz	16QAM	26715	12RB#0	20.36	PASS
Band26	5MHz	16QAM	26715	12RB#6	20.35	PASS
Band26	5MHz	16QAM	26715	12RB#13	20.34	PASS
Band26	5MHz	16QAM	26715	25RB#0	20.40	PASS
Band26	5MHz	16QAM	26740	1RB#0	21.60	PASS
Band26	5MHz	16QAM	26740	1RB#12	21.60	PASS
Band26	5MHz	16QAM	26740	1RB#24	21.61	PASS
Band26	5MHz	16QAM	26740	12RB#0	21.40	PASS
Band26	5MHz	16QAM	26740	12RB#6	21.39	PASS
Band26	5MHz	16QAM	26740	12RB#13	21.39	PASS
Band26	5MHz	16QAM	26740	25RB#0	21.37	PASS
Band26	5MHz	16QAM	26765	1RB#0	21.32	PASS
Band26	5MHz	16QAM	26765	1RB#12	21.28	PASS
Band26	5MHz	16QAM	26765	1RB#24	21.33	PASS
Band26	5MHz	16QAM	26765	12RB#0	21.24	PASS
Band26	5MHz	16QAM	26765	12RB#6	21.29	PASS
Band26	5MHz	16QAM	26765	12RB#13	21.23	PASS
Band26	5MHz	16QAM	26765	25RB#0	21.28	PASS
Band26	10MHz	QPSK	26740	1RB#0	22.31	PASS
Band26	10MHz	QPSK	26740	1RB#24	22.37	PASS
Band26	10MHz	QPSK	26740	1RB#49	22.59	PASS
Band26	10MHz	QPSK	26740	25RB#0	21.34	PASS
Band26	10MHz	QPSK	26740	25RB#12	21.33	PASS
Band26	10MHz	QPSK	26740	25RB#25	21.38	PASS
Band26	10MHz	QPSK	26740	50RB#0	21.40	PASS
Band26	10MHz	16QAM	26740	1RB#0	21.57	PASS
Band26	10MHz	16QAM	26740	1RB#24	21.56	PASS
Band26	10MHz	16QAM	26740	1RB#49	21.55	PASS
Band26	10MHz	16QAM	26740	25RB#0	21.35	PASS
Band26	10MHz	16QAM	26740	25RB#12	21.34	PASS
Band26	10MHz	16QAM	26740	25RB#25	21.38	PASS
Band26	10MHz	16QAM	26740	50RB#0	21.37	PASS

Band26(824-849MHz)

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Verdict
Band26	1.4MHz	QPSK	26797	1RB#0	22.22	PASS
Band26	1.4MHz	QPSK	26797	1RB#2	22.22	PASS
Band26	1.4MHz	QPSK	26797	1RB#5	22.22	PASS
Band26	1.4MHz	QPSK	26797	3RB#0	22.24	PASS
Band26	1.4MHz	QPSK	26797	3RB#1	22.24	PASS
Band26	1.4MHz	QPSK	26797	3RB#3	22.23	PASS
Band26	1.4MHz	QPSK	26797	6RB#0	21.30	PASS
Band26	1.4MHz	QPSK	26915	1RB#0	22.17	PASS
Band26	1.4MHz	QPSK	26915	1RB#2	22.15	PASS
Band26	1.4MHz	QPSK	26915	1RB#5	22.19	PASS
Band26	1.4MHz	QPSK	26915	3RB#0	22.23	PASS
Band26	1.4MHz	QPSK	26915	3RB#1	22.23	PASS
Band26	1.4MHz	QPSK	26915	3RB#3	22.18	PASS
Band26	1.4MHz	QPSK	26915	6RB#0	21.25	PASS
Band26	1.4MHz	QPSK	27033	1RB#0	22.18	PASS
Band26	1.4MHz	QPSK	27033	1RB#2	22.14	PASS
Band26	1.4MHz	QPSK	27033	1RB#5	22.21	PASS
Band26	1.4MHz	QPSK	27033	3RB#0	22.26	PASS
Band26	1.4MHz	QPSK	27033	3RB#1	22.26	PASS
Band26	1.4MHz	QPSK	27033	3RB#3	22.35	PASS
Band26	1.4MHz	QPSK	27033	6RB#0	21.26	PASS
Band26	1.4MHz	16QAM	26797	1RB#0	21.19	PASS
Band26	1.4MHz	16QAM	26797	1RB#2	21.20	PASS
Band26	1.4MHz	16QAM	26797	1RB#5	21.12	PASS
Band26	1.4MHz	16QAM	26797	3RB#0	21.20	PASS
Band26	1.4MHz	16QAM	26797	3RB#1	21.17	PASS
Band26	1.4MHz	16QAM	26797	3RB#3	21.20	PASS
Band26	1.4MHz	16QAM	26797	6RB#0	21.24	PASS
Band26	1.4MHz	16QAM	26915	1RB#0	21.34	PASS
Band26	1.4MHz	16QAM	26915	1RB#2	21.36	PASS
Band26	1.4MHz	16QAM	26915	1RB#5	21.30	PASS
Band26	1.4MHz	16QAM	26915	3RB#0	21.18	PASS
Band26	1.4MHz	16QAM	26915	3RB#1	21.14	PASS
Band26	1.4MHz	16QAM	26915	3RB#3	21.10	PASS

Band26	1.4MHz	16QAM	26915	6RB#0	20.28	PASS
Band26	1.4MHz	16QAM	27033	1RB#0	21.39	PASS
Band26	1.4MHz	16QAM	27033	1RB#2	21.42	PASS
Band26	1.4MHz	16QAM	27033	1RB#5	21.42	PASS
Band26	1.4MHz	16QAM	27033	3RB#0	21.13	PASS
Band26	1.4MHz	16QAM	27033	3RB#1	21.15	PASS
Band26	1.4MHz	16QAM	27033	3RB#3	21.18	PASS
Band26	1.4MHz	16QAM	27033	6RB#0	21.15	PASS
Band26	3MHz	QPSK	26805	1RB#0	22.33	PASS
Band26	3MHz	QPSK	26805	1RB#8	22.33	PASS
Band26	3MHz	QPSK	26805	1RB#14	22.33	PASS
Band26	3MHz	QPSK	26805	8RB#0	21.26	PASS
Band26	3MHz	QPSK	26805	8RB#4	21.27	PASS
Band26	3MHz	QPSK	26805	8RB#7	21.24	PASS
Band26	3MHz	QPSK	26805	15RB#0	21.25	PASS
Band26	3MHz	QPSK	26915	1RB#0	22.29	PASS
Band26	3MHz	QPSK	26915	1RB#8	22.26	PASS
Band26	3MHz	QPSK	26915	1RB#14	22.26	PASS
Band26	3MHz	QPSK	26915	8RB#0	21.23	PASS
Band26	3MHz	QPSK	26915	8RB#4	21.20	PASS
Band26	3MHz	QPSK	26915	8RB#7	21.20	PASS
Band26	3MHz	QPSK	26915	15RB#0	21.23	PASS
Band26	3MHz	QPSK	27025	1RB#0	22.18	PASS
Band26	3MHz	QPSK	27025	1RB#8	22.16	PASS
Band26	3MHz	QPSK	27025	1RB#14	22.20	PASS
Band26	3MHz	QPSK	27025	8RB#0	21.25	PASS
Band26	3MHz	QPSK	27025	8RB#4	21.25	PASS
Band26	3MHz	QPSK	27025	8RB#7	21.22	PASS
Band26	3MHz	QPSK	27025	15RB#0	21.27	PASS
Band26	3MHz	16QAM	26805	1RB#0	21.48	PASS
Band26	3MHz	16QAM	26805	1RB#8	21.50	PASS
Band26	3MHz	16QAM	26805	1RB#14	21.45	PASS
Band26	3MHz	16QAM	26805	8RB#0	21.35	PASS
Band26	3MHz	16QAM	26805	8RB#4	21.34	PASS
Band26	3MHz	16QAM	26805	8RB#7	21.32	PASS
Band26	3MHz	16QAM	26805	15RB#0	21.27	PASS
Band26	3MHz	16QAM	26915	1RB#0	21.46	PASS

Band26	3MHz	16QAM	26915	1RB#8	21.39	PASS
Band26	3MHz	16QAM	26915	1RB#14	21.42	PASS
Band26	3MHz	16QAM	26915	8RB#0	21.33	PASS
Band26	3MHz	16QAM	26915	8RB#4	21.29	PASS
Band26	3MHz	16QAM	26915	8RB#7	21.28	PASS
Band26	3MHz	16QAM	26915	15RB#0	21.25	PASS
Band26	3MHz	16QAM	27025	1RB#0	21.42	PASS
Band26	3MHz	16QAM	27025	1RB#8	21.40	PASS
Band26	3MHz	16QAM	27025	1RB#14	21.40	PASS
Band26	3MHz	16QAM	27025	8RB#0	21.23	PASS
Band26	3MHz	16QAM	27025	8RB#4	21.25	PASS
Band26	3MHz	16QAM	27025	8RB#7	21.24	PASS
Band26	3MHz	16QAM	27025	15RB#0	21.23	PASS
Band26	5MHz	QPSK	26815	1RB#0	22.32	PASS
Band26	5MHz	QPSK	26815	1RB#12	22.45	PASS
Band26	5MHz	QPSK	26815	1RB#24	22.46	PASS
Band26	5MHz	QPSK	26815	12RB#0	21.35	PASS
Band26	5MHz	QPSK	26815	12RB#6	21.35	PASS
Band26	5MHz	QPSK	26815	12RB#13	21.31	PASS
Band26	5MHz	QPSK	26815	25RB#0	21.34	PASS
Band26	5MHz	QPSK	26915	1RB#0	22.44	PASS
Band26	5MHz	QPSK	26915	1RB#12	22.39	PASS
Band26	5MHz	QPSK	26915	1RB#24	22.40	PASS
Band26	5MHz	QPSK	26915	12RB#0	21.27	PASS
Band26	5MHz	QPSK	26915	12RB#6	21.26	PASS
Band26	5MHz	QPSK	26915	12RB#13	21.24	PASS
Band26	5MHz	QPSK	26915	25RB#0	21.27	PASS
Band26	5MHz	QPSK	27015	1RB#0	22.37	PASS
Band26	5MHz	QPSK	27015	1RB#12	22.30	PASS
Band26	5MHz	QPSK	27015	1RB#24	22.37	PASS
Band26	5MHz	QPSK	27015	12RB#0	21.29	PASS
Band26	5MHz	QPSK	27015	12RB#6	21.27	PASS
Band26	5MHz	QPSK	27015	12RB#13	21.20	PASS
Band26	5MHz	QPSK	27015	25RB#0	21.29	PASS
Band26	5MHz	16QAM	26815	1RB#0	21.36	PASS
Band26	5MHz	16QAM	26815	1RB#12	21.31	PASS
Band26	5MHz	16QAM	26815	1RB#24	21.34	PASS

Band26	5MHz	16QAM	26815	12RB#0	21.35	PASS
Band26	5MHz	16QAM	26815	12RB#6	21.36	PASS
Band26	5MHz	16QAM	26815	12RB#13	21.30	PASS
Band26	5MHz	16QAM	26815	25RB#0	20.37	PASS
Band26	5MHz	16QAM	26915	1RB#0	21.33	PASS
Band26	5MHz	16QAM	26915	1RB#12	21.24	PASS
Band26	5MHz	16QAM	26915	1RB#24	21.26	PASS
Band26	5MHz	16QAM	26915	12RB#0	21.31	PASS
Band26	5MHz	16QAM	26915	12RB#6	21.30	PASS
Band26	5MHz	16QAM	26915	12RB#13	21.22	PASS
Band26	5MHz	16QAM	26915	25RB#0	21.30	PASS
Band26	5MHz	16QAM	27015	1RB#0	21.48	PASS
Band26	5MHz	16QAM	27015	1RB#12	21.42	PASS
Band26	5MHz	16QAM	27015	1RB#24	21.57	PASS
Band26	5MHz	16QAM	27015	12RB#0	21.33	PASS
Band26	5MHz	16QAM	27015	12RB#6	21.30	PASS
Band26	5MHz	16QAM	27015	12RB#13	21.25	PASS
Band26	5MHz	16QAM	27015	25RB#0	21.25	PASS
Band26	10MHz	QPSK	26840	1RB#0	22.38	PASS
Band26	10MHz	QPSK	26840	1RB#24	22.36	PASS
Band26	10MHz	QPSK	26840	1RB#49	22.31	PASS
Band26	10MHz	QPSK	26840	25RB#0	21.30	PASS
Band26	10MHz	QPSK	26840	25RB#12	21.29	PASS
Band26	10MHz	QPSK	26840	25RB#25	21.18	PASS
Band26	10MHz	QPSK	26840	50RB#0	21.24	PASS
Band26	10MHz	QPSK	26915	1RB#0	22.33	PASS
Band26	10MHz	QPSK	26915	1RB#24	22.32	PASS
Band26	10MHz	QPSK	26915	1RB#49	22.28	PASS
Band26	10MHz	QPSK	26915	25RB#0	21.29	PASS
Band26	10MHz	QPSK	26915	25RB#12	21.27	PASS
Band26	10MHz	QPSK	26915	25RB#25	21.16	PASS
Band26	10MHz	QPSK	26915	50RB#0	21.22	PASS
Band26	10MHz	QPSK	26990	1RB#0	22.25	PASS
Band26	10MHz	QPSK	26990	1RB#24	22.23	PASS
Band26	10MHz	QPSK	26990	1RB#49	22.20	PASS
Band26	10MHz	QPSK	26990	25RB#0	21.26	PASS
Band26	10MHz	QPSK	26990	25RB#12	21.27	PASS

Band26	10MHz	QPSK	26990	25RB#25	21.10	PASS
Band26	10MHz	QPSK	26990	50RB#0	21.22	PASS
Band26	10MHz	16QAM	26840	1RB#0	21.52	PASS
Band26	10MHz	16QAM	26840	1RB#24	21.49	PASS
Band26	10MHz	16QAM	26840	1RB#49	21.47	PASS
Band26	10MHz	16QAM	26840	25RB#0	21.28	PASS
Band26	10MHz	16QAM	26840	25RB#12	21.30	PASS
Band26	10MHz	16QAM	26840	25RB#25	21.18	PASS
Band26	10MHz	16QAM	26840	50RB#0	21.22	PASS
Band26	10MHz	16QAM	26915	1RB#0	21.49	PASS
Band26	10MHz	16QAM	26915	1RB#24	21.45	PASS
Band26	10MHz	16QAM	26915	1RB#49	21.47	PASS
Band26	10MHz	16QAM	26915	25RB#0	21.25	PASS
Band26	10MHz	16QAM	26915	25RB#12	21.25	PASS
Band26	10MHz	16QAM	26915	25RB#25	21.10	PASS
Band26	10MHz	16QAM	26915	50RB#0	21.20	PASS
Band26	10MHz	16QAM	26990	1RB#0	21.49	PASS
Band26	10MHz	16QAM	26990	1RB#24	21.42	PASS
Band26	10MHz	16QAM	26990	1RB#49	21.42	PASS
Band26	10MHz	16QAM	26990	25RB#0	21.31	PASS
Band26	10MHz	16QAM	26990	25RB#12	21.30	PASS
Band26	10MHz	16QAM	26990	25RB#25	21.13	PASS
Band26	10MHz	16QAM	26990	50RB#0	21.20	PASS
Band26	15MHz	QPSK	26865	1RB#0	22.49	PASS
Band26	15MHz	QPSK	26865	1RB#38	22.30	PASS
Band26	15MHz	QPSK	26865	1RB#74	22.21	PASS
Band26	15MHz	QPSK	26865	38RB#0	21.27	PASS
Band26	15MHz	QPSK	26865	38RB#18	21.25	PASS
Band26	15MHz	QPSK	26865	38RB#37	21.25	PASS
Band26	15MHz	QPSK	26865	75RB#0	21.25	PASS
Band26	15MHz	QPSK	26915	1RB#0	22.20	PASS
Band26	15MHz	QPSK	26915	1RB#38	22.18	PASS
Band26	15MHz	QPSK	26915	1RB#74	22.07	PASS
Band26	15MHz	QPSK	26915	38RB#0	21.23	PASS
Band26	15MHz	QPSK	26915	38RB#18	21.22	PASS
Band26	15MHz	QPSK	26915	38RB#37	21.21	PASS
Band26	15MHz	QPSK	26915	75RB#0	21.21	PASS

Band26	15MHz	QPSK	26965	1RB#0	22.24	PASS
Band26	15MHz	QPSK	26965	1RB#38	22.19	PASS
Band26	15MHz	QPSK	26965	1RB#74	22.15	PASS
Band26	15MHz	QPSK	26965	38RB#0	21.22	PASS
Band26	15MHz	QPSK	26965	38RB#18	21.22	PASS
Band26	15MHz	QPSK	26965	38RB#37	21.22	PASS
Band26	15MHz	QPSK	26965	75RB#0	21.23	PASS
Band26	15MHz	16QAM	26865	1RB#0	21.47	PASS
Band26	15MHz	16QAM	26865	1RB#38	21.48	PASS
Band26	15MHz	16QAM	26865	1RB#74	21.34	PASS
Band26	15MHz	16QAM	26865	38RB#0	21.25	PASS
Band26	15MHz	16QAM	26865	38RB#18	21.25	PASS
Band26	15MHz	16QAM	26865	38RB#37	21.28	PASS
Band26	15MHz	16QAM	26865	75RB#0	21.20	PASS
Band26	15MHz	16QAM	26915	1RB#0	21.52	PASS
Band26	15MHz	16QAM	26915	1RB#38	21.49	PASS
Band26	15MHz	16QAM	26915	1RB#74	21.38	PASS
Band26	15MHz	16QAM	26915	38RB#0	21.20	PASS
Band26	15MHz	16QAM	26915	38RB#18	21.20	PASS
Band26	15MHz	16QAM	26915	38RB#37	21.21	PASS
Band26	15MHz	16QAM	26915	75RB#0	21.21	PASS
Band26	15MHz	16QAM	26965	1RB#0	21.20	PASS
Band26	15MHz	16QAM	26965	1RB#38	21.15	PASS
Band26	15MHz	16QAM	26965	1RB#74	21.07	PASS
Band26	15MHz	16QAM	26965	38RB#0	21.22	PASS
Band26	15MHz	16QAM	26965	38RB#18	21.22	PASS
Band26	15MHz	16QAM	26965	38RB#37	21.22	PASS
Band26	15MHz	16QAM	26965	75RB#0	21.22	PASS

LTE(P1):

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Verdict
Band66	1.4MHz	QPSK	131979	1RB#0	22.10	PASS
Band66	1.4MHz	QPSK	131979	1RB#2	22.07	PASS
Band66	1.4MHz	QPSK	131979	1RB#5	22.03	PASS
Band66	1.4MHz	QPSK	131979	3RB#0	22.10	PASS
Band66	1.4MHz	QPSK	131979	3RB#1	22.10	PASS

Band66	1.4MHz	QPSK	131979	3RB#3	22.08	PASS
Band66	1.4MHz	QPSK	131979	6RB#0	21.11	PASS
Band66	1.4MHz	QPSK	132322	1RB#0	22.11	PASS
Band66	1.4MHz	QPSK	132322	1RB#2	22.05	PASS
Band66	1.4MHz	QPSK	132322	1RB#5	22.03	PASS
Band66	1.4MHz	QPSK	132322	3RB#0	22.04	PASS
Band66	1.4MHz	QPSK	132322	3RB#1	22.05	PASS
Band66	1.4MHz	QPSK	132322	3RB#3	22.03	PASS
Band66	1.4MHz	QPSK	132322	6RB#0	21.07	PASS
Band66	1.4MHz	QPSK	132665	1RB#0	21.40	PASS
Band66	1.4MHz	QPSK	132665	1RB#2	21.32	PASS
Band66	1.4MHz	QPSK	132665	1RB#5	21.36	PASS
Band66	1.4MHz	QPSK	132665	3RB#0	21.38	PASS
Band66	1.4MHz	QPSK	132665	3RB#1	21.39	PASS
Band66	1.4MHz	QPSK	132665	3RB#3	21.39	PASS
Band66	1.4MHz	QPSK	132665	6RB#0	21.38	PASS
Band66	1.4MHz	16QAM	131979	1RB#0	21.25	PASS
Band66	1.4MHz	16QAM	131979	1RB#2	21.35	PASS
Band66	1.4MHz	16QAM	131979	1RB#5	21.25	PASS
Band66	1.4MHz	16QAM	131979	3RB#0	21.97	PASS
Band66	1.4MHz	16QAM	131979	3RB#1	21.98	PASS
Band66	1.4MHz	16QAM	131979	3RB#3	21.94	PASS
Band66	1.4MHz	16QAM	131979	6RB#0	21.98	PASS
Band66	1.4MHz	16QAM	132322	1RB#0	21.25	PASS
Band66	1.4MHz	16QAM	132322	1RB#2	21.29	PASS
Band66	1.4MHz	16QAM	132322	1RB#5	21.26	PASS
Band66	1.4MHz	16QAM	132322	3RB#0	21.93	PASS
Band66	1.4MHz	16QAM	132322	3RB#1	21.93	PASS
Band66	1.4MHz	16QAM	132322	3RB#3	21.91	PASS
Band66	1.4MHz	16QAM	132322	6RB#0	21.86	PASS
Band66	1.4MHz	16QAM	132665	1RB#0	21.96	PASS
Band66	1.4MHz	16QAM	132665	1RB#2	21.88	PASS
Band66	1.4MHz	16QAM	132665	1RB#5	21.91	PASS
Band66	1.4MHz	16QAM	132665	3RB#0	21.86	PASS
Band66	1.4MHz	16QAM	132665	3RB#1	21.98	PASS
Band66	1.4MHz	16QAM	132665	3RB#3	21.20	PASS
Band66	1.4MHz	16QAM	132665	6RB#0	21.98	PASS

Band66	3MHz	QPSK	131987	1RB#0	22.07	PASS
Band66	3MHz	QPSK	131987	1RB#8	22.02	PASS
Band66	3MHz	QPSK	131987	1RB#14	21.99	PASS
Band66	3MHz	QPSK	131987	8RB#0	21.07	PASS
Band66	3MHz	QPSK	131987	8RB#4	21.07	PASS
Band66	3MHz	QPSK	131987	8RB#7	21.06	PASS
Band66	3MHz	QPSK	131987	15RB#0	21.06	PASS
Band66	3MHz	QPSK	132322	1RB#0	22.07	PASS
Band66	3MHz	QPSK	132322	1RB#8	22.05	PASS
Band66	3MHz	QPSK	132322	1RB#14	21.98	PASS
Band66	3MHz	QPSK	132322	8RB#0	21.07	PASS
Band66	3MHz	QPSK	132322	8RB#4	21.08	PASS
Band66	3MHz	QPSK	132322	8RB#7	21.01	PASS
Band66	3MHz	QPSK	132322	15RB#0	21.06	PASS
Band66	3MHz	QPSK	132657	1RB#0	21.39	PASS
Band66	3MHz	QPSK	132657	1RB#8	21.38	PASS
Band66	3MHz	QPSK	132657	1RB#14	21.32	PASS
Band66	3MHz	QPSK	132657	8RB#0	21.43	PASS
Band66	3MHz	QPSK	132657	8RB#4	21.45	PASS
Band66	3MHz	QPSK	132657	8RB#7	21.36	PASS
Band66	3MHz	QPSK	132657	15RB#0	21.39	PASS
Band66	3MHz	16QAM	131987	1RB#0	21.23	PASS
Band66	3MHz	16QAM	131987	1RB#8	21.17	PASS
Band66	3MHz	16QAM	131987	1RB#14	21.12	PASS
Band66	3MHz	16QAM	131987	8RB#0	21.63	PASS
Band66	3MHz	16QAM	131987	8RB#4	21.74	PASS
Band66	3MHz	16QAM	131987	8RB#7	21.72	PASS
Band66	3MHz	16QAM	131987	15RB#0	21.88	PASS
Band66	3MHz	16QAM	132322	1RB#0	21.22	PASS
Band66	3MHz	16QAM	132322	1RB#8	21.24	PASS
Band66	3MHz	16QAM	132322	1RB#14	21.14	PASS
Band66	3MHz	16QAM	132322	8RB#0	21.61	PASS
Band66	3MHz	16QAM	132322	8RB#4	21.61	PASS
Band66	3MHz	16QAM	132322	8RB#7	21.64	PASS
Band66	3MHz	16QAM	132322	15RB#0	21.64	PASS
Band66	3MHz	16QAM	132657	1RB#0	21.67	PASS
Band66	3MHz	16QAM	132657	1RB#8	21.53	PASS

Band66	3MHz	16QAM	132657	1RB#14	21.50	PASS
Band66	3MHz	16QAM	132657	8RB#0	21.46	PASS
Band66	3MHz	16QAM	132657	8RB#4	21.48	PASS
Band66	3MHz	16QAM	132657	8RB#7	21.43	PASS
Band66	3MHz	16QAM	132657	15RB#0	21.59	PASS
Band66	5MHz	QPSK	131997	1RB#0	22.29	PASS
Band66	5MHz	QPSK	131997	1RB#12	22.22	PASS
Band66	5MHz	QPSK	131997	1RB#24	22.17	PASS
Band66	5MHz	QPSK	131997	12RB#0	21.10	PASS
Band66	5MHz	QPSK	131997	12RB#6	21.14	PASS
Band66	5MHz	QPSK	131997	12RB#13	21.98	PASS
Band66	5MHz	QPSK	131997	25RB#0	21.11	PASS
Band66	5MHz	QPSK	132322	1RB#0	22.24	PASS
Band66	5MHz	QPSK	132322	1RB#12	22.22	PASS
Band66	5MHz	QPSK	132322	1RB#24	22.19	PASS
Band66	5MHz	QPSK	132322	12RB#0	21.07	PASS
Band66	5MHz	QPSK	132322	12RB#6	21.09	PASS
Band66	5MHz	QPSK	132322	12RB#13	21.01	PASS
Band66	5MHz	QPSK	132322	25RB#0	21.05	PASS
Band66	5MHz	QPSK	132647	1RB#0	21.63	PASS
Band66	5MHz	QPSK	132647	1RB#12	21.56	PASS
Band66	5MHz	QPSK	132647	1RB#24	21.53	PASS
Band66	5MHz	QPSK	132647	12RB#0	21.48	PASS
Band66	5MHz	QPSK	132647	12RB#6	21.53	PASS
Band66	5MHz	QPSK	132647	12RB#13	21.42	PASS
Band66	5MHz	QPSK	132647	25RB#0	21.44	PASS
Band66	5MHz	16QAM	131997	1RB#0	21.21	PASS
Band66	5MHz	16QAM	131997	1RB#12	21.08	PASS
Band66	5MHz	16QAM	131997	1RB#24	21.07	PASS
Band66	5MHz	16QAM	131997	12RB#0	21.07	PASS
Band66	5MHz	16QAM	131997	12RB#6	21.58	PASS
Band66	5MHz	16QAM	131997	12RB#13	21.99	PASS
Band66	5MHz	16QAM	131997	25RB#0	21.61	PASS
Band66	5MHz	16QAM	132322	1RB#0	21.13	PASS
Band66	5MHz	16QAM	132322	1RB#12	21.13	PASS
Band66	5MHz	16QAM	132322	1RB#24	21.09	PASS
Band66	5MHz	16QAM	132322	12RB#0	21.55	PASS

Band66	5MHz	16QAM	132322	12RB#6	21.67	PASS
Band66	5MHz	16QAM	132322	12RB#13	21.98	PASS
Band66	5MHz	16QAM	132322	25RB#0	21.46	PASS
Band66	5MHz	16QAM	132647	1RB#0	21.57	PASS
Band66	5MHz	16QAM	132647	1RB#12	21.46	PASS
Band66	5MHz	16QAM	132647	1RB#24	21.45	PASS
Band66	5MHz	16QAM	132647	12RB#0	21.47	PASS
Band66	5MHz	16QAM	132647	12RB#6	21.43	PASS
Band66	5MHz	16QAM	132647	12RB#13	21.65	PASS
Band66	5MHz	16QAM	132647	25RB#0	21.45	PASS
Band66	10MHz	QPSK	132022	1RB#0	22.17	PASS
Band66	10MHz	QPSK	132022	1RB#24	22.05	PASS
Band66	10MHz	QPSK	132022	1RB#49	21.88	PASS
Band66	10MHz	QPSK	132022	25RB#0	21.04	PASS
Band66	10MHz	QPSK	132022	25RB#12	21.06	PASS
Band66	10MHz	QPSK	132022	25RB#25	21.01	PASS
Band66	10MHz	QPSK	132022	50RB#0	21.08	PASS
Band66	10MHz	QPSK	132322	1RB#0	22.12	PASS
Band66	10MHz	QPSK	132322	1RB#24	22.15	PASS
Band66	10MHz	QPSK	132322	1RB#49	21.96	PASS
Band66	10MHz	QPSK	132322	25RB#0	21.14	PASS
Band66	10MHz	QPSK	132322	25RB#12	21.13	PASS
Band66	10MHz	QPSK	132322	25RB#25	21.11	PASS
Band66	10MHz	QPSK	132322	50RB#0	21.14	PASS
Band66	10MHz	QPSK	132622	1RB#0	21.51	PASS
Band66	10MHz	QPSK	132622	1RB#24	21.55	PASS
Band66	10MHz	QPSK	132622	1RB#49	21.36	PASS
Band66	10MHz	QPSK	132622	25RB#0	21.46	PASS
Band66	10MHz	QPSK	132622	25RB#12	21.53	PASS
Band66	10MHz	QPSK	132622	25RB#25	21.45	PASS
Band66	10MHz	QPSK	132622	50RB#0	21.49	PASS
Band66	10MHz	16QAM	132022	1RB#0	21.32	PASS
Band66	10MHz	16QAM	132022	1RB#24	21.22	PASS
Band66	10MHz	16QAM	132022	1RB#49	21.01	PASS
Band66	10MHz	16QAM	132022	25RB#0	21.98	PASS
Band66	10MHz	16QAM	132022	25RB#12	21.75	PASS
Band66	10MHz	16QAM	132022	25RB#25	21.51	PASS

Band66	10MHz	16QAM	132022	50RB#0	21.64	PASS
Band66	10MHz	16QAM	132322	1RB#0	21.22	PASS
Band66	10MHz	16QAM	132322	1RB#24	21.30	PASS
Band66	10MHz	16QAM	132322	1RB#49	21.08	PASS
Band66	10MHz	16QAM	132322	25RB#0	21.50	PASS
Band66	10MHz	16QAM	132322	25RB#12	21.63	PASS
Band66	10MHz	16QAM	132322	25RB#25	21.72	PASS
Band66	10MHz	16QAM	132322	50RB#0	21.76	PASS
Band66	10MHz	16QAM	132622	1RB#0	21.64	PASS
Band66	10MHz	16QAM	132622	1RB#24	21.68	PASS
Band66	10MHz	16QAM	132622	1RB#49	21.54	PASS
Band66	10MHz	16QAM	132622	25RB#0	21.47	PASS
Band66	10MHz	16QAM	132622	25RB#12	21.49	PASS
Band66	10MHz	16QAM	132622	25RB#25	21.41	PASS
Band66	10MHz	16QAM	132622	50RB#0	21.45	PASS
Band66	15MHz	QPSK	132047	1RB#0	22.11	PASS
Band66	15MHz	QPSK	132047	1RB#38	21.94	PASS
Band66	15MHz	QPSK	132047	1RB#74	21.60	PASS
Band66	15MHz	QPSK	132047	38RB#0	21.90	PASS
Band66	15MHz	QPSK	132047	38RB#18	21.92	PASS
Band66	15MHz	QPSK	132047	38RB#37	21.90	PASS
Band66	15MHz	QPSK	132047	75RB#0	21.92	PASS
Band66	15MHz	QPSK	132322	1RB#0	21.99	PASS
Band66	15MHz	QPSK	132322	1RB#38	22.07	PASS
Band66	15MHz	QPSK	132322	1RB#74	21.75	PASS
Band66	15MHz	QPSK	132322	38RB#0	21.05	PASS
Band66	15MHz	QPSK	132322	38RB#18	21.02	PASS
Band66	15MHz	QPSK	132322	38RB#37	21.00	PASS
Band66	15MHz	QPSK	132322	75RB#0	21.06	PASS
Band66	15MHz	QPSK	132597	1RB#0	21.43	PASS
Band66	15MHz	QPSK	132597	1RB#38	21.41	PASS
Band66	15MHz	QPSK	132597	1RB#74	21.23	PASS
Band66	15MHz	QPSK	132597	38RB#0	21.47	PASS
Band66	15MHz	QPSK	132597	38RB#18	21.49	PASS
Band66	15MHz	QPSK	132597	38RB#37	21.49	PASS
Band66	15MHz	QPSK	132597	75RB#0	21.41	PASS
Band66	15MHz	16QAM	132047	1RB#0	21.23	PASS

Band66	15MHz	16QAM	132047	1RB#38	21.06	PASS
Band66	15MHz	16QAM	132047	1RB#74	21.76	PASS
Band66	15MHz	16QAM	132047	38RB#0	21.88	PASS
Band66	15MHz	16QAM	132047	38RB#18	21.90	PASS
Band66	15MHz	16QAM	132047	38RB#37	21.92	PASS
Band66	15MHz	16QAM	132047	75RB#0	21.83	PASS
Band66	15MHz	16QAM	132322	1RB#0	21.16	PASS
Band66	15MHz	16QAM	132322	1RB#38	21.21	PASS
Band66	15MHz	16QAM	132322	1RB#74	20.90	PASS
Band66	15MHz	16QAM	132322	38RB#0	21.03	PASS
Band66	15MHz	16QAM	132322	38RB#18	21.01	PASS
Band66	15MHz	16QAM	132322	38RB#37	21.01	PASS
Band66	15MHz	16QAM	132322	75RB#0	20.97	PASS
Band66	15MHz	16QAM	132597	1RB#0	21.65	PASS
Band66	15MHz	16QAM	132597	1RB#38	21.60	PASS
Band66	15MHz	16QAM	132597	1RB#74	21.45	PASS
Band66	15MHz	16QAM	132597	38RB#0	21.63	PASS
Band66	15MHz	16QAM	132597	38RB#18	21.73	PASS
Band66	15MHz	16QAM	132597	38RB#37	21.42	PASS
Band66	15MHz	16QAM	132597	75RB#0	21.45	PASS
Band66	20MHz	QPSK	132072	1RB#0	21.99	PASS
Band66	20MHz	QPSK	132072	1RB#49	21.76	PASS
Band66	20MHz	QPSK	132072	1RB#99	21.48	PASS
Band66	20MHz	QPSK	132072	50RB#0	21.38	PASS
Band66	20MHz	QPSK	132072	50RB#25	21.37	PASS
Band66	20MHz	QPSK	132072	50RB#50	21.49	PASS
Band66	20MHz	QPSK	132072	100RB#0	21.61	PASS
Band66	20MHz	QPSK	132322	1RB#0	21.93	PASS
Band66	20MHz	QPSK	132322	1RB#49	22.31	PASS
Band66	20MHz	QPSK	132322	1RB#99	21.67	PASS
Band66	20MHz	QPSK	132322	50RB#0	21.05	PASS
Band66	20MHz	QPSK	132322	50RB#25	21.05	PASS
Band66	20MHz	QPSK	132322	50RB#50	21.92	PASS
Band66	20MHz	QPSK	132322	100RB#0	21.97	PASS
Band66	20MHz	QPSK	132572	1RB#0	21.40	PASS
Band66	20MHz	QPSK	132572	1RB#49	21.54	PASS
Band66	20MHz	QPSK	132572	1RB#99	21.34	PASS

Band66	20MHz	QPSK	132572	50RB#0	21.45	PASS
Band66	20MHz	QPSK	132572	50RB#25	21.44	PASS
Band66	20MHz	QPSK	132572	50RB#50	21.66	PASS
Band66	20MHz	QPSK	132572	100RB#0	21.44	PASS
Band66	20MHz	16QAM	132072	1RB#0	21.02	PASS
Band66	20MHz	16QAM	132072	1RB#49	21.74	PASS
Band66	20MHz	16QAM	132072	1RB#99	21.47	PASS
Band66	20MHz	16QAM	132072	50RB#0	21.73	PASS
Band66	20MHz	16QAM	132072	50RB#25	21.75	PASS
Band66	20MHz	16QAM	132072	50RB#50	21.47	PASS
Band66	20MHz	16QAM	132072	100RB#0	21.59	PASS
Band66	20MHz	16QAM	132322	1RB#0	21.92	PASS
Band66	20MHz	16QAM	132322	1RB#49	21.17	PASS
Band66	20MHz	16QAM	132322	1RB#99	21.68	PASS
Band66	20MHz	16QAM	132322	50RB#0	21.98	PASS
Band66	20MHz	16QAM	132322	50RB#25	21.41	PASS
Band66	20MHz	16QAM	132322	50RB#50	21.59	PASS
Band66	20MHz	16QAM	132322	100RB#0	21.57	PASS
Band66	20MHz	16QAM	132572	1RB#0	21.44	PASS
Band66	20MHz	16QAM	132572	1RB#49	21.53	PASS
Band66	20MHz	16QAM	132572	1RB#99	21.30	PASS
Band66	20MHz	16QAM	132572	50RB#0	21.43	PASS
Band66	20MHz	16QAM	132572	50RB#25	21.43	PASS
Band66	20MHz	16QAM	132572	50RB#50	21.52	PASS
Band66	20MHz	16QAM	132572	100RB#0	21.38	PASS

LTE(P4): Sensor ON

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Verdict
Band66	1.4MHz	QPSK	131979	1RB#0	19.04	PASS
Band66	1.4MHz	QPSK	131979	1RB#2	19.00	PASS
Band66	1.4MHz	QPSK	131979	1RB#5	19.04	PASS
Band66	1.4MHz	QPSK	131979	3RB#0	18.98	PASS
Band66	1.4MHz	QPSK	131979	3RB#1	18.98	PASS
Band66	1.4MHz	QPSK	131979	3RB#3	19.01	PASS
Band66	1.4MHz	QPSK	131979	6RB#0	19.01	PASS
Band66	1.4MHz	QPSK	132322	1RB#0	19.07	PASS

Band66	1.4MHz	QPSK	132322	1RB#2	19.05	PASS
Band66	1.4MHz	QPSK	132322	1RB#5	19.07	PASS
Band66	1.4MHz	QPSK	132322	3RB#0	19.04	PASS
Band66	1.4MHz	QPSK	132322	3RB#1	19.04	PASS
Band66	1.4MHz	QPSK	132322	3RB#3	19.08	PASS
Band66	1.4MHz	QPSK	132322	6RB#0	19.05	PASS
Band66	1.4MHz	QPSK	132665	1RB#0	18.56	PASS
Band66	1.4MHz	QPSK	132665	1RB#2	18.50	PASS
Band66	1.4MHz	QPSK	132665	1RB#5	18.47	PASS
Band66	1.4MHz	QPSK	132665	3RB#0	18.52	PASS
Band66	1.4MHz	QPSK	132665	3RB#1	18.51	PASS
Band66	1.4MHz	QPSK	132665	3RB#3	18.55	PASS
Band66	1.4MHz	QPSK	132665	6RB#0	18.46	PASS
Band66	1.4MHz	16QAM	131979	1RB#0	19.16	PASS
Band66	1.4MHz	16QAM	131979	1RB#2	19.22	PASS
Band66	1.4MHz	16QAM	131979	1RB#5	19.16	PASS
Band66	1.4MHz	16QAM	131979	3RB#0	18.93	PASS
Band66	1.4MHz	16QAM	131979	3RB#1	18.90	PASS
Band66	1.4MHz	16QAM	131979	3RB#3	18.91	PASS
Band66	1.4MHz	16QAM	131979	6RB#0	18.84	PASS
Band66	1.4MHz	16QAM	132322	1RB#0	19.26	PASS
Band66	1.4MHz	16QAM	132322	1RB#2	19.18	PASS
Band66	1.4MHz	16QAM	132322	1RB#5	19.30	PASS
Band66	1.4MHz	16QAM	132322	3RB#0	18.93	PASS
Band66	1.4MHz	16QAM	132322	3RB#1	18.92	PASS
Band66	1.4MHz	16QAM	132322	3RB#3	18.90	PASS
Band66	1.4MHz	16QAM	132322	6RB#0	19.07	PASS
Band66	1.4MHz	16QAM	132665	1RB#0	18.68	PASS
Band66	1.4MHz	16QAM	132665	1RB#2	18.70	PASS
Band66	1.4MHz	16QAM	132665	1RB#5	18.67	PASS
Band66	1.4MHz	16QAM	132665	3RB#0	18.43	PASS
Band66	1.4MHz	16QAM	132665	3RB#1	18.42	PASS
Band66	1.4MHz	16QAM	132665	3RB#3	18.43	PASS
Band66	1.4MHz	16QAM	132665	6RB#0	18.37	PASS
Band66	3MHz	QPSK	131987	1RB#0	18.97	PASS
Band66	3MHz	QPSK	131987	1RB#8	18.96	PASS
Band66	3MHz	QPSK	131987	1RB#14	18.89	PASS

Band66	3MHz	QPSK	131987	8RB#0	18.99	PASS
Band66	3MHz	QPSK	131987	8RB#4	18.99	PASS
Band66	3MHz	QPSK	131987	8RB#7	18.98	PASS
Band66	3MHz	QPSK	131987	15RB#0	18.97	PASS
Band66	3MHz	QPSK	132322	1RB#0	19.02	PASS
Band66	3MHz	QPSK	132322	1RB#8	19.04	PASS
Band66	3MHz	QPSK	132322	1RB#14	19.00	PASS
Band66	3MHz	QPSK	132322	8RB#0	19.01	PASS
Band66	3MHz	QPSK	132322	8RB#4	19.04	PASS
Band66	3MHz	QPSK	132322	8RB#7	19.01	PASS
Band66	3MHz	QPSK	132322	15RB#0	19.06	PASS
Band66	3MHz	QPSK	132657	1RB#0	18.54	PASS
Band66	3MHz	QPSK	132657	1RB#8	18.50	PASS
Band66	3MHz	QPSK	132657	1RB#14	18.41	PASS
Band66	3MHz	QPSK	132657	8RB#0	18.54	PASS
Band66	3MHz	QPSK	132657	8RB#4	18.55	PASS
Band66	3MHz	QPSK	132657	8RB#7	18.47	PASS
Band66	3MHz	QPSK	132657	15RB#0	18.54	PASS
Band66	3MHz	16QAM	131987	1RB#0	19.08	PASS
Band66	3MHz	16QAM	131987	1RB#8	19.06	PASS
Band66	3MHz	16QAM	131987	1RB#14	18.99	PASS
Band66	3MHz	16QAM	131987	8RB#0	19.07	PASS
Band66	3MHz	16QAM	131987	8RB#4	19.08	PASS
Band66	3MHz	16QAM	131987	8RB#7	19.06	PASS
Band66	3MHz	16QAM	131987	15RB#0	19.02	PASS
Band66	3MHz	16QAM	132322	1RB#0	19.18	PASS
Band66	3MHz	16QAM	132322	1RB#8	19.22	PASS
Band66	3MHz	16QAM	132322	1RB#14	19.17	PASS
Band66	3MHz	16QAM	132322	8RB#0	19.14	PASS
Band66	3MHz	16QAM	132322	8RB#4	19.13	PASS
Band66	3MHz	16QAM	132322	8RB#7	19.12	PASS
Band66	3MHz	16QAM	132322	15RB#0	19.07	PASS
Band66	3MHz	16QAM	132657	1RB#0	18.73	PASS
Band66	3MHz	16QAM	132657	1RB#8	18.67	PASS
Band66	3MHz	16QAM	132657	1RB#14	18.62	PASS
Band66	3MHz	16QAM	132657	8RB#0	18.64	PASS
Band66	3MHz	16QAM	132657	8RB#4	18.65	PASS

Band66	3MHz	16QAM	132657	8RB#7	18.55	PASS
Band66	3MHz	16QAM	132657	15RB#0	18.58	PASS
Band66	5MHz	QPSK	131997	1RB#0	19.22	PASS
Band66	5MHz	QPSK	131997	1RB#12	19.04	PASS
Band66	5MHz	QPSK	131997	1RB#24	18.99	PASS
Band66	5MHz	QPSK	131997	12RB#0	18.99	PASS
Band66	5MHz	QPSK	131997	12RB#6	19.04	PASS
Band66	5MHz	QPSK	131997	12RB#13	18.93	PASS
Band66	5MHz	QPSK	131997	25RB#0	18.97	PASS
Band66	5MHz	QPSK	132322	1RB#0	19.19	PASS
Band66	5MHz	QPSK	132322	1RB#12	19.13	PASS
Band66	5MHz	QPSK	132322	1RB#24	19.21	PASS
Band66	5MHz	QPSK	132322	12RB#0	19.10	PASS
Band66	5MHz	QPSK	132322	12RB#6	19.11	PASS
Band66	5MHz	QPSK	132322	12RB#13	19.00	PASS
Band66	5MHz	QPSK	132322	25RB#0	19.07	PASS
Band66	5MHz	QPSK	132647	1RB#0	18.77	PASS
Band66	5MHz	QPSK	132647	1RB#12	18.64	PASS
Band66	5MHz	QPSK	132647	1RB#24	18.65	PASS
Band66	5MHz	QPSK	132647	12RB#0	18.60	PASS
Band66	5MHz	QPSK	132647	12RB#6	18.62	PASS
Band66	5MHz	QPSK	132647	12RB#13	18.47	PASS
Band66	5MHz	QPSK	132647	25RB#0	18.56	PASS
Band66	5MHz	16QAM	131997	1RB#0	19.12	PASS
Band66	5MHz	16QAM	131997	1RB#12	18.98	PASS
Band66	5MHz	16QAM	131997	1RB#24	18.99	PASS
Band66	5MHz	16QAM	131997	12RB#0	19.02	PASS
Band66	5MHz	16QAM	131997	12RB#6	18.97	PASS
Band66	5MHz	16QAM	131997	12RB#13	18.94	PASS
Band66	5MHz	16QAM	131997	25RB#0	19.04	PASS
Band66	5MHz	16QAM	132322	1RB#0	19.17	PASS
Band66	5MHz	16QAM	132322	1RB#12	19.16	PASS
Band66	5MHz	16QAM	132322	1RB#24	19.14	PASS
Band66	5MHz	16QAM	132322	12RB#0	19.09	PASS
Band66	5MHz	16QAM	132322	12RB#6	19.07	PASS
Band66	5MHz	16QAM	132322	12RB#13	19.02	PASS
Band66	5MHz	16QAM	132322	25RB#0	19.08	PASS

Band66	5MHz	16QAM	132647	1RB#0	18.73	PASS
Band66	5MHz	16QAM	132647	1RB#12	18.62	PASS
Band66	5MHz	16QAM	132647	1RB#24	18.59	PASS
Band66	5MHz	16QAM	132647	12RB#0	18.63	PASS
Band66	5MHz	16QAM	132647	12RB#6	18.63	PASS
Band66	5MHz	16QAM	132647	12RB#13	18.53	PASS
Band66	5MHz	16QAM	132647	25RB#0	18.59	PASS
Band66	10MHz	QPSK	132022	1RB#0	19.03	PASS
Band66	10MHz	QPSK	132022	1RB#24	18.94	PASS
Band66	10MHz	QPSK	132022	1RB#49	18.79	PASS
Band66	10MHz	QPSK	132022	25RB#0	18.98	PASS
Band66	10MHz	QPSK	132022	25RB#12	18.95	PASS
Band66	10MHz	QPSK	132022	25RB#25	18.89	PASS
Band66	10MHz	QPSK	132022	50RB#0	18.94	PASS
Band66	10MHz	QPSK	132322	1RB#0	19.06	PASS
Band66	10MHz	QPSK	132322	1RB#24	19.09	PASS
Band66	10MHz	QPSK	132322	1RB#49	18.99	PASS
Band66	10MHz	QPSK	132322	25RB#0	19.06	PASS
Band66	10MHz	QPSK	132322	25RB#12	19.06	PASS
Band66	10MHz	QPSK	132322	25RB#25	19.08	PASS
Band66	10MHz	QPSK	132322	50RB#0	19.10	PASS
Band66	10MHz	QPSK	132622	1RB#0	18.69	PASS
Band66	10MHz	QPSK	132622	1RB#24	18.67	PASS
Band66	10MHz	QPSK	132622	1RB#49	18.47	PASS
Band66	10MHz	QPSK	132622	25RB#0	18.68	PASS
Band66	10MHz	QPSK	132622	25RB#12	18.63	PASS
Band66	10MHz	QPSK	132622	25RB#25	18.59	PASS
Band66	10MHz	QPSK	132622	50RB#0	18.65	PASS
Band66	10MHz	16QAM	132022	1RB#0	19.19	PASS
Band66	10MHz	16QAM	132022	1RB#24	19.09	PASS
Band66	10MHz	16QAM	132022	1RB#49	18.95	PASS
Band66	10MHz	16QAM	132022	25RB#0	18.93	PASS
Band66	10MHz	16QAM	132022	25RB#12	18.95	PASS
Band66	10MHz	16QAM	132022	25RB#25	18.90	PASS
Band66	10MHz	16QAM	132022	50RB#0	18.92	PASS
Band66	10MHz	16QAM	132322	1RB#0	19.22	PASS
Band66	10MHz	16QAM	132322	1RB#24	19.28	PASS

Band66	10MHz	16QAM	132322	1RB#49	19.20	PASS
Band66	10MHz	16QAM	132322	25RB#0	19.08	PASS
Band66	10MHz	16QAM	132322	25RB#12	19.09	PASS
Band66	10MHz	16QAM	132322	25RB#25	19.09	PASS
Band66	10MHz	16QAM	132322	50RB#0	19.09	PASS
Band66	10MHz	16QAM	132622	1RB#0	18.83	PASS
Band66	10MHz	16QAM	132622	1RB#24	18.79	PASS
Band66	10MHz	16QAM	132622	1RB#49	18.64	PASS
Band66	10MHz	16QAM	132622	25RB#0	18.63	PASS
Band66	10MHz	16QAM	132622	25RB#12	18.66	PASS
Band66	10MHz	16QAM	132622	25RB#25	18.56	PASS
Band66	10MHz	16QAM	132622	50RB#0	18.60	PASS
Band66	15MHz	QPSK	132047	1RB#0	19.00	PASS
Band66	15MHz	QPSK	132047	1RB#38	18.82	PASS
Band66	15MHz	QPSK	132047	1RB#74	18.54	PASS
Band66	15MHz	QPSK	132047	38RB#0	18.83	PASS
Band66	15MHz	QPSK	132047	38RB#18	18.84	PASS
Band66	15MHz	QPSK	132047	38RB#37	18.83	PASS
Band66	15MHz	QPSK	132047	75RB#0	18.85	PASS
Band66	15MHz	QPSK	132322	1RB#0	18.90	PASS
Band66	15MHz	QPSK	132322	1RB#38	19.07	PASS
Band66	15MHz	QPSK	132322	1RB#74	18.87	PASS
Band66	15MHz	QPSK	132322	38RB#0	19.07	PASS
Band66	15MHz	QPSK	132322	38RB#18	19.07	PASS
Band66	15MHz	QPSK	132322	38RB#37	19.07	PASS
Band66	15MHz	QPSK	132322	75RB#0	19.04	PASS
Band66	15MHz	QPSK	132597	1RB#0	18.62	PASS
Band66	15MHz	QPSK	132597	1RB#38	18.62	PASS
Band66	15MHz	QPSK	132597	1RB#74	18.41	PASS
Band66	15MHz	QPSK	132597	38RB#0	18.63	PASS
Band66	15MHz	QPSK	132597	38RB#18	18.68	PASS
Band66	15MHz	QPSK	132597	38RB#37	18.68	PASS
Band66	15MHz	QPSK	132597	75RB#0	18.69	PASS
Band66	15MHz	16QAM	132047	1RB#0	19.12	PASS
Band66	15MHz	16QAM	132047	1RB#38	19.03	PASS
Band66	15MHz	16QAM	132047	1RB#74	18.71	PASS
Band66	15MHz	16QAM	132047	38RB#0	18.85	PASS

Band66	15MHz	16QAM	132047	38RB#18	18.84	PASS
Band66	15MHz	16QAM	132047	38RB#37	18.85	PASS
Band66	15MHz	16QAM	132047	75RB#0	18.80	PASS
Band66	15MHz	16QAM	132322	1RB#0	19.08	PASS
Band66	15MHz	16QAM	132322	1RB#38	19.25	PASS
Band66	15MHz	16QAM	132322	1RB#74	19.10	PASS
Band66	15MHz	16QAM	132322	38RB#0	19.03	PASS
Band66	15MHz	16QAM	132322	38RB#18	19.08	PASS
Band66	15MHz	16QAM	132322	38RB#37	19.07	PASS
Band66	15MHz	16QAM	132322	75RB#0	18.99	PASS
Band66	15MHz	16QAM	132597	1RB#0	18.81	PASS
Band66	15MHz	16QAM	132597	1RB#38	18.81	PASS
Band66	15MHz	16QAM	132597	1RB#74	18.64	PASS
Band66	15MHz	16QAM	132597	38RB#0	18.69	PASS
Band66	15MHz	16QAM	132597	38RB#18	18.69	PASS
Band66	15MHz	16QAM	132597	38RB#37	18.69	PASS
Band66	15MHz	16QAM	132597	75RB#0	18.62	PASS
Band66	20MHz	QPSK	132072	1RB#0	18.98	PASS
Band66	20MHz	QPSK	132072	1RB#49	18.73	PASS
Band66	20MHz	QPSK	132072	1RB#99	18.51	PASS
Band66	20MHz	QPSK	132072	50RB#0	18.73	PASS
Band66	20MHz	QPSK	132072	50RB#25	18.74	PASS
Band66	20MHz	QPSK	132072	50RB#50	18.56	PASS
Band66	20MHz	QPSK	132072	100RB#0	18.60	PASS
Band66	20MHz	QPSK	132322	1RB#0	18.95	PASS
Band66	20MHz	QPSK	132322	1RB#49	19.33	PASS
Band66	20MHz	QPSK	132322	1RB#99	18.94	PASS
Band66	20MHz	QPSK	132322	50RB#0	19.10	PASS
Band66	20MHz	QPSK	132322	50RB#25	19.11	PASS
Band66	20MHz	QPSK	132322	50RB#50	19.10	PASS
Band66	20MHz	QPSK	132322	100RB#0	19.10	PASS
Band66	20MHz	QPSK	132572	1RB#0	18.72	PASS
Band66	20MHz	QPSK	132572	1RB#49	18.79	PASS
Band66	20MHz	QPSK	132572	1RB#99	18.53	PASS
Band66	20MHz	QPSK	132572	50RB#0	18.76	PASS
Band66	20MHz	QPSK	132572	50RB#25	18.78	PASS
Band66	20MHz	QPSK	132572	50RB#50	18.66	PASS

Band66	20MHz	QPSK	132572	100RB#0	18.68	PASS
Band66	20MHz	16QAM	132072	1RB#0	19.00	PASS
Band66	20MHz	16QAM	132072	1RB#49	18.79	PASS
Band66	20MHz	16QAM	132072	1RB#99	18.51	PASS
Band66	20MHz	16QAM	132072	50RB#0	18.73	PASS
Band66	20MHz	16QAM	132072	50RB#25	18.70	PASS
Band66	20MHz	16QAM	132072	50RB#50	18.51	PASS
Band66	20MHz	16QAM	132072	100RB#0	18.60	PASS
Band66	20MHz	16QAM	132322	1RB#0	18.99	PASS
Band66	20MHz	16QAM	132322	1RB#49	19.24	PASS
Band66	20MHz	16QAM	132322	1RB#99	18.91	PASS
Band66	20MHz	16QAM	132322	50RB#0	19.10	PASS
Band66	20MHz	16QAM	132322	50RB#25	19.11	PASS
Band66	20MHz	16QAM	132322	50RB#50	19.07	PASS
Band66	20MHz	16QAM	132322	100RB#0	19.07	PASS
Band66	20MHz	16QAM	132572	1RB#0	18.75	PASS
Band66	20MHz	16QAM	132572	1RB#49	18.83	PASS
Band66	20MHz	16QAM	132572	1RB#99	18.55	PASS
Band66	20MHz	16QAM	132572	50RB#0	18.75	PASS
Band66	20MHz	16QAM	132572	50RB#25	18.74	PASS
Band66	20MHz	16QAM	132572	50RB#50	18.61	PASS
Band66	20MHz	16QAM	132572	100RB#0	18.68	PASS

LTE(P2): Receiver ON

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Verdict
Band66	1.4MHz	QPSK	131979	1RB#0	13.86	PASS
Band66	1.4MHz	QPSK	131979	1RB#2	13.83	PASS
Band66	1.4MHz	QPSK	131979	1RB#5	13.89	PASS
Band66	1.4MHz	QPSK	131979	3RB#0	13.80	PASS
Band66	1.4MHz	QPSK	131979	3RB#1	13.79	PASS
Band66	1.4MHz	QPSK	131979	3RB#3	13.83	PASS
Band66	1.4MHz	QPSK	131979	6RB#0	13.83	PASS
Band66	1.4MHz	QPSK	132322	1RB#0	13.89	PASS
Band66	1.4MHz	QPSK	132322	1RB#2	13.88	PASS
Band66	1.4MHz	QPSK	132322	1RB#5	13.92	PASS
Band66	1.4MHz	QPSK	132322	3RB#0	13.79	PASS

Band66	1.4MHz	QPSK	132322	3RB#1	13.80	PASS
Band66	1.4MHz	QPSK	132322	3RB#3	13.86	PASS
Band66	1.4MHz	QPSK	132322	6RB#0	13.87	PASS
Band66	1.4MHz	QPSK	132665	1RB#0	13.35	PASS
Band66	1.4MHz	QPSK	132665	1RB#2	13.29	PASS
Band66	1.4MHz	QPSK	132665	1RB#5	13.33	PASS
Band66	1.4MHz	QPSK	132665	3RB#0	13.34	PASS
Band66	1.4MHz	QPSK	132665	3RB#1	13.35	PASS
Band66	1.4MHz	QPSK	132665	3RB#3	13.31	PASS
Band66	1.4MHz	QPSK	132665	6RB#0	13.35	PASS
Band66	1.4MHz	16QAM	131979	1RB#0	13.98	PASS
Band66	1.4MHz	16QAM	131979	1RB#2	13.01	PASS
Band66	1.4MHz	16QAM	131979	1RB#5	13.98	PASS
Band66	1.4MHz	16QAM	131979	3RB#0	13.74	PASS
Band66	1.4MHz	16QAM	131979	3RB#1	13.74	PASS
Band66	1.4MHz	16QAM	131979	3RB#3	13.75	PASS
Band66	1.4MHz	16QAM	131979	6RB#0	13.70	PASS
Band66	1.4MHz	16QAM	132322	1RB#0	13.00	PASS
Band66	1.4MHz	16QAM	132322	1RB#2	13.06	PASS
Band66	1.4MHz	16QAM	132322	1RB#5	13.04	PASS
Band66	1.4MHz	16QAM	132322	3RB#0	13.74	PASS
Band66	1.4MHz	16QAM	132322	3RB#1	13.69	PASS
Band66	1.4MHz	16QAM	132322	3RB#3	13.73	PASS
Band66	1.4MHz	16QAM	132322	6RB#0	13.71	PASS
Band66	1.4MHz	16QAM	132665	1RB#0	13.59	PASS
Band66	1.4MHz	16QAM	132665	1RB#2	13.52	PASS
Band66	1.4MHz	16QAM	132665	1RB#5	13.43	PASS
Band66	1.4MHz	16QAM	132665	3RB#0	13.15	PASS
Band66	1.4MHz	16QAM	132665	3RB#1	13.18	PASS
Band66	1.4MHz	16QAM	132665	3RB#3	13.16	PASS
Band66	1.4MHz	16QAM	132665	6RB#0	13.36	PASS
Band66	3MHz	QPSK	131987	1RB#0	13.81	PASS
Band66	3MHz	QPSK	131987	1RB#8	13.77	PASS
Band66	3MHz	QPSK	131987	1RB#14	13.70	PASS
Band66	3MHz	QPSK	131987	8RB#0	13.82	PASS
Band66	3MHz	QPSK	131987	8RB#4	13.81	PASS
Band66	3MHz	QPSK	131987	8RB#7	13.79	PASS

Band66	3MHz	QPSK	131987	15RB#0	13.78	PASS
Band66	3MHz	QPSK	132322	1RB#0	13.79	PASS
Band66	3MHz	QPSK	132322	1RB#8	13.85	PASS
Band66	3MHz	QPSK	132322	1RB#14	13.79	PASS
Band66	3MHz	QPSK	132322	8RB#0	13.85	PASS
Band66	3MHz	QPSK	132322	8RB#4	13.85	PASS
Band66	3MHz	QPSK	132322	8RB#7	13.82	PASS
Band66	3MHz	QPSK	132322	15RB#0	13.87	PASS
Band66	3MHz	QPSK	132657	1RB#0	13.38	PASS
Band66	3MHz	QPSK	132657	1RB#8	13.32	PASS
Band66	3MHz	QPSK	132657	1RB#14	13.25	PASS
Band66	3MHz	QPSK	132657	8RB#0	13.36	PASS
Band66	3MHz	QPSK	132657	8RB#4	13.39	PASS
Band66	3MHz	QPSK	132657	8RB#7	13.34	PASS
Band66	3MHz	QPSK	132657	15RB#0	13.37	PASS
Band66	3MHz	16QAM	131987	1RB#0	13.98	PASS
Band66	3MHz	16QAM	131987	1RB#8	13.92	PASS
Band66	3MHz	16QAM	131987	1RB#14	13.88	PASS
Band66	3MHz	16QAM	131987	8RB#0	13.87	PASS
Band66	3MHz	16QAM	131987	8RB#4	13.91	PASS
Band66	3MHz	16QAM	131987	8RB#7	13.86	PASS
Band66	3MHz	16QAM	131987	15RB#0	13.82	PASS
Band66	3MHz	16QAM	132322	1RB#0	13.88	PASS
Band66	3MHz	16QAM	132322	1RB#8	13.00	PASS
Band66	3MHz	16QAM	132322	1RB#14	13.92	PASS
Band66	3MHz	16QAM	132322	8RB#0	13.97	PASS
Band66	3MHz	16QAM	132322	8RB#4	13.98	PASS
Band66	3MHz	16QAM	132322	8RB#7	13.91	PASS
Band66	3MHz	16QAM	132322	15RB#0	13.88	PASS
Band66	3MHz	16QAM	132657	1RB#0	13.57	PASS
Band66	3MHz	16QAM	132657	1RB#8	13.57	PASS
Band66	3MHz	16QAM	132657	1RB#14	13.46	PASS
Band66	3MHz	16QAM	132657	8RB#0	13.47	PASS
Band66	3MHz	16QAM	132657	8RB#4	13.47	PASS
Band66	3MHz	16QAM	132657	8RB#7	13.43	PASS
Band66	3MHz	16QAM	132657	15RB#0	13.36	PASS
Band66	5MHz	QPSK	131997	1RB#0	13.97	PASS

Band66	5MHz	QPSK	131997	1RB#12	13.84	PASS
Band66	5MHz	QPSK	131997	1RB#24	13.82	PASS
Band66	5MHz	QPSK	131997	12RB#0	13.81	PASS
Band66	5MHz	QPSK	131997	12RB#6	13.81	PASS
Band66	5MHz	QPSK	131997	12RB#13	13.74	PASS
Band66	5MHz	QPSK	131997	25RB#0	13.80	PASS
Band66	5MHz	QPSK	132322	1RB#0	13.95	PASS
Band66	5MHz	QPSK	132322	1RB#12	13.93	PASS
Band66	5MHz	QPSK	132322	1RB#24	13.94	PASS
Band66	5MHz	QPSK	132322	12RB#0	13.85	PASS
Band66	5MHz	QPSK	132322	12RB#6	13.86	PASS
Band66	5MHz	QPSK	132322	12RB#13	13.83	PASS
Band66	5MHz	QPSK	132322	25RB#0	13.85	PASS
Band66	5MHz	QPSK	132647	1RB#0	13.62	PASS
Band66	5MHz	QPSK	132647	1RB#12	13.47	PASS
Band66	5MHz	QPSK	132647	1RB#24	13.47	PASS
Band66	5MHz	QPSK	132647	12RB#0	13.48	PASS
Band66	5MHz	QPSK	132647	12RB#6	13.49	PASS
Band66	5MHz	QPSK	132647	12RB#13	13.39	PASS
Band66	5MHz	QPSK	132647	25RB#0	13.42	PASS
Band66	5MHz	16QAM	131997	1RB#0	13.94	PASS
Band66	5MHz	16QAM	131997	1RB#12	13.81	PASS
Band66	5MHz	16QAM	131997	1RB#24	13.80	PASS
Band66	5MHz	16QAM	131997	12RB#0	13.82	PASS
Band66	5MHz	16QAM	131997	12RB#6	13.81	PASS
Band66	5MHz	16QAM	131997	12RB#13	13.77	PASS
Band66	5MHz	16QAM	131997	25RB#0	13.83	PASS
Band66	5MHz	16QAM	132322	1RB#0	13.82	PASS
Band66	5MHz	16QAM	132322	1RB#12	13.92	PASS
Band66	5MHz	16QAM	132322	1RB#24	13.92	PASS
Band66	5MHz	16QAM	132322	12RB#0	13.84	PASS
Band66	5MHz	16QAM	132322	12RB#6	13.88	PASS
Band66	5MHz	16QAM	132322	12RB#13	13.78	PASS
Band66	5MHz	16QAM	132322	25RB#0	13.90	PASS
Band66	5MHz	16QAM	132647	1RB#0	13.57	PASS
Band66	5MHz	16QAM	132647	1RB#12	13.35	PASS
Band66	5MHz	16QAM	132647	1RB#24	13.42	PASS

Band66	5MHz	16QAM	132647	12RB#0	13.44	PASS
Band66	5MHz	16QAM	132647	12RB#6	13.37	PASS
Band66	5MHz	16QAM	132647	12RB#13	13.36	PASS
Band66	5MHz	16QAM	132647	25RB#0	13.47	PASS
Band66	10MHz	QPSK	132022	1RB#0	13.87	PASS
Band66	10MHz	QPSK	132022	1RB#24	13.71	PASS
Band66	10MHz	QPSK	132022	1RB#49	13.58	PASS
Band66	10MHz	QPSK	132022	25RB#0	13.82	PASS
Band66	10MHz	QPSK	132022	25RB#12	13.75	PASS
Band66	10MHz	QPSK	132022	25RB#25	13.74	PASS
Band66	10MHz	QPSK	132022	50RB#0	13.79	PASS
Band66	10MHz	QPSK	132322	1RB#0	13.83	PASS
Band66	10MHz	QPSK	132322	1RB#24	13.87	PASS
Band66	10MHz	QPSK	132322	1RB#49	13.81	PASS
Band66	10MHz	QPSK	132322	25RB#0	13.88	PASS
Band66	10MHz	QPSK	132322	25RB#12	13.89	PASS
Band66	10MHz	QPSK	132322	25RB#25	13.89	PASS
Band66	10MHz	QPSK	132322	50RB#0	13.92	PASS
Band66	10MHz	QPSK	132622	1RB#0	13.50	PASS
Band66	10MHz	QPSK	132622	1RB#24	13.52	PASS
Band66	10MHz	QPSK	132622	1RB#49	13.30	PASS
Band66	10MHz	QPSK	132622	25RB#0	13.47	PASS
Band66	10MHz	QPSK	132622	25RB#12	13.50	PASS
Band66	10MHz	QPSK	132622	25RB#25	13.39	PASS
Band66	10MHz	QPSK	132622	50RB#0	13.50	PASS
Band66	10MHz	16QAM	132022	1RB#0	14.01	PASS
Band66	10MHz	16QAM	132022	1RB#24	13.89	PASS
Band66	10MHz	16QAM	132022	1RB#49	13.76	PASS
Band66	10MHz	16QAM	132022	25RB#0	13.77	PASS
Band66	10MHz	16QAM	132022	25RB#12	13.76	PASS
Band66	10MHz	16QAM	132022	25RB#25	13.75	PASS
Band66	10MHz	16QAM	132022	50RB#0	13.73	PASS
Band66	10MHz	16QAM	132322	1RB#0	13.97	PASS
Band66	10MHz	16QAM	132322	1RB#24	13.93	PASS
Band66	10MHz	16QAM	132322	1RB#49	13.99	PASS
Band66	10MHz	16QAM	132322	25RB#0	13.88	PASS
Band66	10MHz	16QAM	132322	25RB#12	13.88	PASS

Band66	10MHz	16QAM	132322	25RB#25	13.90	PASS
Band66	10MHz	16QAM	132322	50RB#0	13.86	PASS
Band66	10MHz	16QAM	132622	1RB#0	13.64	PASS
Band66	10MHz	16QAM	132622	1RB#24	13.66	PASS
Band66	10MHz	16QAM	132622	1RB#49	13.44	PASS
Band66	10MHz	16QAM	132622	25RB#0	13.53	PASS
Band66	10MHz	16QAM	132622	25RB#12	13.48	PASS
Band66	10MHz	16QAM	132622	25RB#25	13.45	PASS
Band66	10MHz	16QAM	132622	50RB#0	13.50	PASS
Band66	15MHz	QPSK	132047	1RB#0	13.85	PASS
Band66	15MHz	QPSK	132047	1RB#38	13.67	PASS
Band66	15MHz	QPSK	132047	1RB#74	13.37	PASS
Band66	15MHz	QPSK	132047	38RB#0	13.66	PASS
Band66	15MHz	QPSK	132047	38RB#18	13.67	PASS
Band66	15MHz	QPSK	132047	38RB#37	13.65	PASS
Band66	15MHz	QPSK	132047	75RB#0	13.66	PASS
Band66	15MHz	QPSK	132322	1RB#0	13.72	PASS
Band66	15MHz	QPSK	132322	1RB#38	13.88	PASS
Band66	15MHz	QPSK	132322	1RB#74	13.70	PASS
Band66	15MHz	QPSK	132322	38RB#0	13.88	PASS
Band66	15MHz	QPSK	132322	38RB#18	13.88	PASS
Band66	15MHz	QPSK	132322	38RB#37	13.85	PASS
Band66	15MHz	QPSK	132322	75RB#0	13.86	PASS
Band66	15MHz	QPSK	132597	1RB#0	13.53	PASS
Band66	15MHz	QPSK	132597	1RB#38	13.50	PASS
Band66	15MHz	QPSK	132597	1RB#74	13.27	PASS
Band66	15MHz	QPSK	132597	38RB#0	13.51	PASS
Band66	15MHz	QPSK	132597	38RB#18	13.52	PASS
Band66	15MHz	QPSK	132597	38RB#37	13.51	PASS
Band66	15MHz	QPSK	132597	75RB#0	13.52	PASS
Band66	15MHz	16QAM	132047	1RB#0	14.04	PASS
Band66	15MHz	16QAM	132047	1RB#38	13.81	PASS
Band66	15MHz	16QAM	132047	1RB#74	13.52	PASS
Band66	15MHz	16QAM	132047	38RB#0	13.66	PASS
Band66	15MHz	16QAM	132047	38RB#18	13.66	PASS
Band66	15MHz	16QAM	132047	38RB#37	13.65	PASS
Band66	15MHz	16QAM	132047	75RB#0	13.61	PASS

Band66	15MHz	16QAM	132322	1RB#0	13.85	PASS
Band66	15MHz	16QAM	132322	1RB#38	14.07	PASS
Band66	15MHz	16QAM	132322	1RB#74	13.89	PASS
Band66	15MHz	16QAM	132322	38RB#0	13.88	PASS
Band66	15MHz	16QAM	132322	38RB#18	13.88	PASS
Band66	15MHz	16QAM	132322	38RB#37	13.86	PASS
Band66	15MHz	16QAM	132322	75RB#0	13.85	PASS
Band66	15MHz	16QAM	132597	1RB#0	13.70	PASS
Band66	15MHz	16QAM	132597	1RB#38	13.71	PASS
Band66	15MHz	16QAM	132597	1RB#74	13.45	PASS
Band66	15MHz	16QAM	132597	38RB#0	13.51	PASS
Band66	15MHz	16QAM	132597	38RB#18	13.52	PASS
Band66	15MHz	16QAM	132597	38RB#37	13.51	PASS
Band66	15MHz	16QAM	132597	75RB#0	13.50	PASS
Band66	20MHz	QPSK	132072	1RB#0	13.79	PASS
Band66	20MHz	QPSK	132072	1RB#49	13.56	PASS
Band66	20MHz	QPSK	132072	1RB#99	13.30	PASS
Band66	20MHz	QPSK	132072	50RB#0	13.59	PASS
Band66	20MHz	QPSK	132072	50RB#25	13.58	PASS
Band66	20MHz	QPSK	132072	50RB#50	13.35	PASS
Band66	20MHz	QPSK	132072	100RB#0	13.42	PASS
Band66	20MHz	QPSK	132322	1RB#0	13.69	PASS
Band66	20MHz	QPSK	132322	1RB#49	13.02	PASS
Band66	20MHz	QPSK	132322	1RB#99	13.78	PASS
Band66	20MHz	QPSK	132322	50RB#0	13.87	PASS
Band66	20MHz	QPSK	132322	50RB#25	13.86	PASS
Band66	20MHz	QPSK	132322	50RB#50	14.10	PASS
Band66	20MHz	QPSK	132322	100RB#0	13.89	PASS
Band66	20MHz	QPSK	132572	1RB#0	13.60	PASS
Band66	20MHz	QPSK	132572	1RB#49	13.62	PASS
Band66	20MHz	QPSK	132572	1RB#99	13.37	PASS
Band66	20MHz	QPSK	132572	50RB#0	13.64	PASS
Band66	20MHz	QPSK	132572	50RB#25	13.61	PASS
Band66	20MHz	QPSK	132572	50RB#50	13.53	PASS
Band66	20MHz	QPSK	132572	100RB#0	13.60	PASS
Band66	20MHz	16QAM	132072	1RB#0	13.79	PASS
Band66	20MHz	16QAM	132072	1RB#49	13.60	PASS

Band66	20MHz	16QAM	132072	1RB#99	13.32	PASS
Band66	20MHz	16QAM	132072	50RB#0	13.57	PASS
Band66	20MHz	16QAM	132072	50RB#25	13.56	PASS
Band66	20MHz	16QAM	132072	50RB#50	13.38	PASS
Band66	20MHz	16QAM	132072	100RB#0	13.44	PASS
Band66	20MHz	16QAM	132322	1RB#0	13.73	PASS
Band66	20MHz	16QAM	132322	1RB#49	13.05	PASS
Band66	20MHz	16QAM	132322	1RB#99	13.72	PASS
Band66	20MHz	16QAM	132322	50RB#0	13.88	PASS
Band66	20MHz	16QAM	132322	50RB#25	13.88	PASS
Band66	20MHz	16QAM	132322	50RB#50	13.90	PASS
Band66	20MHz	16QAM	132322	100RB#0	13.85	PASS
Band66	20MHz	16QAM	132572	1RB#0	13.57	PASS
Band66	20MHz	16QAM	132572	1RB#49	13.65	PASS
Band66	20MHz	16QAM	132572	1RB#99	13.37	PASS
Band66	20MHz	16QAM	132572	50RB#0	13.63	PASS
Band66	20MHz	16QAM	132572	50RB#25	13.64	PASS
Band66	20MHz	16QAM	132572	50RB#50	13.49	PASS
Band66	20MHz	16QAM	132572	100RB#0	13.58	PASS

LTE(P3): Hotspot ON

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Verdict
Band66	1.4MHz	QPSK	131979	1RB#0	18.98	PASS
Band66	1.4MHz	QPSK	131979	1RB#2	18.94	PASS
Band66	1.4MHz	QPSK	131979	1RB#5	18.95	PASS
Band66	1.4MHz	QPSK	131979	3RB#0	18.94	PASS
Band66	1.4MHz	QPSK	131979	3RB#1	18.97	PASS
Band66	1.4MHz	QPSK	131979	3RB#3	18.97	PASS
Band66	1.4MHz	QPSK	131979	6RB#0	18.98	PASS
Band66	1.4MHz	QPSK	132322	1RB#0	19.02	PASS
Band66	1.4MHz	QPSK	132322	1RB#2	18.99	PASS
Band66	1.4MHz	QPSK	132322	1RB#5	19.02	PASS
Band66	1.4MHz	QPSK	132322	3RB#0	18.97	PASS
Band66	1.4MHz	QPSK	132322	3RB#1	19.00	PASS
Band66	1.4MHz	QPSK	132322	3RB#3	19.01	PASS
Band66	1.4MHz	QPSK	132322	6RB#0	18.99	PASS
Band66	1.4MHz	QPSK	132665	1RB#0	18.47	PASS
Band66	1.4MHz	QPSK	132665	1RB#2	18.41	PASS
Band66	1.4MHz	QPSK	132665	1RB#5	18.42	PASS
Band66	1.4MHz	QPSK	132665	3RB#0	18.43	PASS
Band66	1.4MHz	QPSK	132665	3RB#1	18.45	PASS
Band66	1.4MHz	QPSK	132665	3RB#3	18.46	PASS
Band66	1.4MHz	QPSK	132665	6RB#0	18.42	PASS
Band66	1.4MHz	16QAM	131979	1RB#0	19.13	PASS
Band66	1.4MHz	16QAM	131979	1RB#2	19.15	PASS
Band66	1.4MHz	16QAM	131979	1RB#5	19.14	PASS
Band66	1.4MHz	16QAM	131979	3RB#0	18.88	PASS
Band66	1.4MHz	16QAM	131979	3RB#1	18.89	PASS
Band66	1.4MHz	16QAM	131979	3RB#3	18.85	PASS
Band66	1.4MHz	16QAM	131979	6RB#0	18.83	PASS
Band66	1.4MHz	16QAM	132322	1RB#0	19.20	PASS
Band66	1.4MHz	16QAM	132322	1RB#2	19.15	PASS
Band66	1.4MHz	16QAM	132322	1RB#5	19.21	PASS
Band66	1.4MHz	16QAM	132322	3RB#0	18.89	PASS
Band66	1.4MHz	16QAM	132322	3RB#1	18.87	PASS
Band66	1.4MHz	16QAM	132322	3RB#3	18.85	PASS

Band66	1.4MHz	16QAM	132322	6RB#0	19.03	PASS
Band66	1.4MHz	16QAM	132665	1RB#0	18.63	PASS
Band66	1.4MHz	16QAM	132665	1RB#2	18.63	PASS
Band66	1.4MHz	16QAM	132665	1RB#5	18.61	PASS
Band66	1.4MHz	16QAM	132665	3RB#0	18.38	PASS
Band66	1.4MHz	16QAM	132665	3RB#1	18.38	PASS
Band66	1.4MHz	16QAM	132665	3RB#3	18.35	PASS
Band66	1.4MHz	16QAM	132665	6RB#0	18.33	PASS
Band66	3MHz	QPSK	131987	1RB#0	18.96	PASS
Band66	3MHz	QPSK	131987	1RB#8	18.90	PASS
Band66	3MHz	QPSK	131987	1RB#14	18.84	PASS
Band66	3MHz	QPSK	131987	8RB#0	18.93	PASS
Band66	3MHz	QPSK	131987	8RB#4	18.94	PASS
Band66	3MHz	QPSK	131987	8RB#7	18.91	PASS
Band66	3MHz	QPSK	131987	15RB#0	18.91	PASS
Band66	3MHz	QPSK	132322	1RB#0	18.97	PASS
Band66	3MHz	QPSK	132322	1RB#8	18.99	PASS
Band66	3MHz	QPSK	132322	1RB#14	18.96	PASS
Band66	3MHz	QPSK	132322	8RB#0	19.02	PASS
Band66	3MHz	QPSK	132322	8RB#4	19.01	PASS
Band66	3MHz	QPSK	132322	8RB#7	18.97	PASS
Band66	3MHz	QPSK	132322	15RB#0	19.00	PASS
Band66	3MHz	QPSK	132657	1RB#0	18.52	PASS
Band66	3MHz	QPSK	132657	1RB#8	18.45	PASS
Band66	3MHz	QPSK	132657	1RB#14	18.38	PASS
Band66	3MHz	QPSK	132657	8RB#0	18.50	PASS
Band66	3MHz	QPSK	132657	8RB#4	18.53	PASS
Band66	3MHz	QPSK	132657	8RB#7	18.40	PASS
Band66	3MHz	QPSK	132657	15RB#0	18.51	PASS
Band66	3MHz	16QAM	131987	1RB#0	19.02	PASS
Band66	3MHz	16QAM	131987	1RB#8	19.01	PASS
Band66	3MHz	16QAM	131987	1RB#14	18.93	PASS
Band66	3MHz	16QAM	131987	8RB#0	19.04	PASS
Band66	3MHz	16QAM	131987	8RB#4	19.01	PASS
Band66	3MHz	16QAM	131987	8RB#7	18.97	PASS
Band66	3MHz	16QAM	131987	15RB#0	18.97	PASS
Band66	3MHz	16QAM	132322	1RB#0	19.17	PASS

Band66	3MHz	16QAM	132322	1RB#8	19.17	PASS
Band66	3MHz	16QAM	132322	1RB#14	19.14	PASS
Band66	3MHz	16QAM	132322	8RB#0	19.13	PASS
Band66	3MHz	16QAM	132322	8RB#4	19.11	PASS
Band66	3MHz	16QAM	132322	8RB#7	19.05	PASS
Band66	3MHz	16QAM	132322	15RB#0	19.04	PASS
Band66	3MHz	16QAM	132657	1RB#0	18.69	PASS
Band66	3MHz	16QAM	132657	1RB#8	18.62	PASS
Band66	3MHz	16QAM	132657	1RB#14	18.59	PASS
Band66	3MHz	16QAM	132657	8RB#0	18.60	PASS
Band66	3MHz	16QAM	132657	8RB#4	18.61	PASS
Band66	3MHz	16QAM	132657	8RB#7	18.52	PASS
Band66	3MHz	16QAM	132657	15RB#0	18.54	PASS
Band66	5MHz	QPSK	131997	1RB#0	19.12	PASS
Band66	5MHz	QPSK	131997	1RB#12	19.00	PASS
Band66	5MHz	QPSK	131997	1RB#24	18.99	PASS
Band66	5MHz	QPSK	131997	12RB#0	19.00	PASS
Band66	5MHz	QPSK	131997	12RB#6	18.97	PASS
Band66	5MHz	QPSK	131997	12RB#13	18.91	PASS
Band66	5MHz	QPSK	131997	25RB#0	18.97	PASS
Band66	5MHz	QPSK	132322	1RB#0	19.14	PASS
Band66	5MHz	QPSK	132322	1RB#12	19.15	PASS
Band66	5MHz	QPSK	132322	1RB#24	19.16	PASS
Band66	5MHz	QPSK	132322	12RB#0	19.02	PASS
Band66	5MHz	QPSK	132322	12RB#6	19.03	PASS
Band66	5MHz	QPSK	132322	12RB#13	18.95	PASS
Band66	5MHz	QPSK	132322	25RB#0	19.02	PASS
Band66	5MHz	QPSK	132647	1RB#0	18.71	PASS
Band66	5MHz	QPSK	132647	1RB#12	18.59	PASS
Band66	5MHz	QPSK	132647	1RB#24	18.61	PASS
Band66	5MHz	QPSK	132647	12RB#0	18.63	PASS
Band66	5MHz	QPSK	132647	12RB#6	18.64	PASS
Band66	5MHz	QPSK	132647	12RB#13	18.46	PASS
Band66	5MHz	QPSK	132647	25RB#0	18.53	PASS
Band66	5MHz	16QAM	131997	1RB#0	19.11	PASS
Band66	5MHz	16QAM	131997	1RB#12	18.94	PASS
Band66	5MHz	16QAM	131997	1RB#24	18.94	PASS

Band66	5MHz	16QAM	131997	12RB#0	18.94	PASS
Band66	5MHz	16QAM	131997	12RB#6	18.94	PASS
Band66	5MHz	16QAM	131997	12RB#13	18.89	PASS
Band66	5MHz	16QAM	131997	25RB#0	19.00	PASS
Band66	5MHz	16QAM	132322	1RB#0	19.15	PASS
Band66	5MHz	16QAM	132322	1RB#12	19.11	PASS
Band66	5MHz	16QAM	132322	1RB#24	19.11	PASS
Band66	5MHz	16QAM	132322	12RB#0	19.04	PASS
Band66	5MHz	16QAM	132322	12RB#6	19.04	PASS
Band66	5MHz	16QAM	132322	12RB#13	18.94	PASS
Band66	5MHz	16QAM	132322	25RB#0	19.05	PASS
Band66	5MHz	16QAM	132647	1RB#0	18.68	PASS
Band66	5MHz	16QAM	132647	1RB#12	18.54	PASS
Band66	5MHz	16QAM	132647	1RB#24	18.57	PASS
Band66	5MHz	16QAM	132647	12RB#0	18.57	PASS
Band66	5MHz	16QAM	132647	12RB#6	18.57	PASS
Band66	5MHz	16QAM	132647	12RB#13	18.46	PASS
Band66	5MHz	16QAM	132647	25RB#0	18.57	PASS
Band66	10MHz	QPSK	132022	1RB#0	18.99	PASS
Band66	10MHz	QPSK	132022	1RB#24	18.90	PASS
Band66	10MHz	QPSK	132022	1RB#49	18.74	PASS
Band66	10MHz	QPSK	132022	25RB#0	18.93	PASS
Band66	10MHz	QPSK	132022	25RB#12	18.92	PASS
Band66	10MHz	QPSK	132022	25RB#25	18.88	PASS
Band66	10MHz	QPSK	132022	50RB#0	18.90	PASS
Band66	10MHz	QPSK	132322	1RB#0	18.99	PASS
Band66	10MHz	QPSK	132322	1RB#24	19.06	PASS
Band66	10MHz	QPSK	132322	1RB#49	18.96	PASS
Band66	10MHz	QPSK	132322	25RB#0	19.02	PASS
Band66	10MHz	QPSK	132322	25RB#12	19.05	PASS
Band66	10MHz	QPSK	132322	25RB#25	19.04	PASS
Band66	10MHz	QPSK	132322	50RB#0	19.07	PASS
Band66	10MHz	QPSK	132622	1RB#0	18.66	PASS
Band66	10MHz	QPSK	132622	1RB#24	18.60	PASS
Band66	10MHz	QPSK	132622	1RB#49	18.41	PASS
Band66	10MHz	QPSK	132622	25RB#0	18.58	PASS
Band66	10MHz	QPSK	132622	25RB#12	18.60	PASS

Band66	10MHz	QPSK	132622	25RB#25	18.53	PASS
Band66	10MHz	QPSK	132622	50RB#0	18.59	PASS
Band66	10MHz	16QAM	132022	1RB#0	19.16	PASS
Band66	10MHz	16QAM	132022	1RB#24	19.04	PASS
Band66	10MHz	16QAM	132022	1RB#49	18.91	PASS
Band66	10MHz	16QAM	132022	25RB#0	18.90	PASS
Band66	10MHz	16QAM	132022	25RB#12	18.88	PASS
Band66	10MHz	16QAM	132022	25RB#25	18.89	PASS
Band66	10MHz	16QAM	132022	50RB#0	18.90	PASS
Band66	10MHz	16QAM	132322	1RB#0	19.18	PASS
Band66	10MHz	16QAM	132322	1RB#24	19.23	PASS
Band66	10MHz	16QAM	132322	1RB#49	19.12	PASS
Band66	10MHz	16QAM	132322	25RB#0	19.05	PASS
Band66	10MHz	16QAM	132322	25RB#12	19.07	PASS
Band66	10MHz	16QAM	132322	25RB#25	19.02	PASS
Band66	10MHz	16QAM	132322	50RB#0	19.05	PASS
Band66	10MHz	16QAM	132622	1RB#0	18.80	PASS
Band66	10MHz	16QAM	132622	1RB#24	18.75	PASS
Band66	10MHz	16QAM	132622	1RB#49	18.62	PASS
Band66	10MHz	16QAM	132622	25RB#0	18.61	PASS
Band66	10MHz	16QAM	132622	25RB#12	18.56	PASS
Band66	10MHz	16QAM	132622	25RB#25	18.55	PASS
Band66	10MHz	16QAM	132622	50RB#0	18.59	PASS
Band66	15MHz	QPSK	132047	1RB#0	18.95	PASS
Band66	15MHz	QPSK	132047	1RB#38	18.82	PASS
Band66	15MHz	QPSK	132047	1RB#74	18.52	PASS
Band66	15MHz	QPSK	132047	38RB#0	18.79	PASS
Band66	15MHz	QPSK	132047	38RB#18	18.78	PASS
Band66	15MHz	QPSK	132047	38RB#37	18.81	PASS
Band66	15MHz	QPSK	132047	75RB#0	18.82	PASS
Band66	15MHz	QPSK	132322	1RB#0	18.86	PASS
Band66	15MHz	QPSK	132322	1RB#38	19.02	PASS
Band66	15MHz	QPSK	132322	1RB#74	18.85	PASS
Band66	15MHz	QPSK	132322	38RB#0	19.01	PASS
Band66	15MHz	QPSK	132322	38RB#18	19.04	PASS
Band66	15MHz	QPSK	132322	38RB#37	19.03	PASS
Band66	15MHz	QPSK	132322	75RB#0	19.01	PASS

Band66	15MHz	QPSK	132597	1RB#0	18.60	PASS
Band66	15MHz	QPSK	132597	1RB#38	18.57	PASS
Band66	15MHz	QPSK	132597	1RB#74	18.34	PASS
Band66	15MHz	QPSK	132597	38RB#0	18.62	PASS
Band66	15MHz	QPSK	132597	38RB#18	18.63	PASS
Band66	15MHz	QPSK	132597	38RB#37	18.63	PASS
Band66	15MHz	QPSK	132597	75RB#0	18.63	PASS
Band66	15MHz	16QAM	132047	1RB#0	19.08	PASS
Band66	15MHz	16QAM	132047	1RB#38	18.98	PASS
Band66	15MHz	16QAM	132047	1RB#74	18.70	PASS
Band66	15MHz	16QAM	132047	38RB#0	18.80	PASS
Band66	15MHz	16QAM	132047	38RB#18	18.81	PASS
Band66	15MHz	16QAM	132047	38RB#37	18.81	PASS
Band66	15MHz	16QAM	132047	75RB#0	18.78	PASS
Band66	15MHz	16QAM	132322	1RB#0	19.05	PASS
Band66	15MHz	16QAM	132322	1RB#38	19.22	PASS
Band66	15MHz	16QAM	132322	1RB#74	19.04	PASS
Band66	15MHz	16QAM	132322	38RB#0	19.03	PASS
Band66	15MHz	16QAM	132322	38RB#18	19.04	PASS
Band66	15MHz	16QAM	132322	38RB#37	19.02	PASS
Band66	15MHz	16QAM	132322	75RB#0	19.00	PASS
Band66	15MHz	16QAM	132597	1RB#0	18.85	PASS
Band66	15MHz	16QAM	132597	1RB#38	18.77	PASS
Band66	15MHz	16QAM	132597	1RB#74	18.56	PASS
Band66	15MHz	16QAM	132597	38RB#0	18.62	PASS
Band66	15MHz	16QAM	132597	38RB#18	18.63	PASS
Band66	15MHz	16QAM	132597	38RB#37	18.63	PASS
Band66	15MHz	16QAM	132597	75RB#0	18.57	PASS
Band66	20MHz	QPSK	132072	1RB#0	18.94	PASS
Band66	20MHz	QPSK	132072	1RB#49	18.69	PASS
Band66	20MHz	QPSK	132072	1RB#99	18.43	PASS
Band66	20MHz	QPSK	132072	50RB#0	18.70	PASS
Band66	20MHz	QPSK	132072	50RB#25	18.72	PASS
Band66	20MHz	QPSK	132072	50RB#50	18.50	PASS
Band66	20MHz	QPSK	132072	100RB#0	18.60	PASS
Band66	20MHz	QPSK	132322	1RB#0	18.90	PASS
Band66	20MHz	QPSK	132322	1RB#49	19.28	PASS

Band66	20MHz	QPSK	132322	1RB#99	18.89	PASS
Band66	20MHz	QPSK	132322	50RB#0	19.04	PASS
Band66	20MHz	QPSK	132322	50RB#25	19.03	PASS
Band66	20MHz	QPSK	132322	50RB#50	19.02	PASS
Band66	20MHz	QPSK	132322	100RB#0	19.03	PASS
Band66	20MHz	QPSK	132572	1RB#0	18.66	PASS
Band66	20MHz	QPSK	132572	1RB#49	18.72	PASS
Band66	20MHz	QPSK	132572	1RB#99	18.40	PASS
Band66	20MHz	QPSK	132572	50RB#0	18.74	PASS
Band66	20MHz	QPSK	132572	50RB#25	18.74	PASS
Band66	20MHz	QPSK	132572	50RB#50	18.55	PASS
Band66	20MHz	QPSK	132572	100RB#0	18.64	PASS
Band66	20MHz	16QAM	132072	1RB#0	18.95	PASS
Band66	20MHz	16QAM	132072	1RB#49	18.77	PASS
Band66	20MHz	16QAM	132072	1RB#99	18.48	PASS
Band66	20MHz	16QAM	132072	50RB#0	18.70	PASS
Band66	20MHz	16QAM	132072	50RB#25	18.70	PASS
Band66	20MHz	16QAM	132072	50RB#50	18.48	PASS
Band66	20MHz	16QAM	132072	100RB#0	18.59	PASS
Band66	20MHz	16QAM	132322	1RB#0	18.95	PASS
Band66	20MHz	16QAM	132322	1RB#49	19.23	PASS
Band66	20MHz	16QAM	132322	1RB#99	18.92	PASS
Band66	20MHz	16QAM	132322	50RB#0	19.06	PASS
Band66	20MHz	16QAM	132322	50RB#25	19.04	PASS
Band66	20MHz	16QAM	132322	50RB#50	19.02	PASS
Band66	20MHz	16QAM	132322	100RB#0	19.04	PASS
Band66	20MHz	16QAM	132572	1RB#0	18.70	PASS
Band66	20MHz	16QAM	132572	1RB#49	18.81	PASS
Band66	20MHz	16QAM	132572	1RB#99	18.50	PASS
Band66	20MHz	16QAM	132572	50RB#0	18.72	PASS
Band66	20MHz	16QAM	132572	50RB#25	18.70	PASS
Band66	20MHz	16QAM	132572	50RB#50	18.54	PASS
Band66	20MHz	16QAM	132572	100RB#0	18.65	PASS

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Verdict
Band71	5MHz	QPSK	133147	1RB#0	22.02	PASS
Band71	5MHz	QPSK	133147	1RB#12	21.99	PASS
Band71	5MHz	QPSK	133147	1RB#24	22.00	PASS
Band71	5MHz	QPSK	133147	12RB#0	20.81	PASS
Band71	5MHz	QPSK	133147	12RB#6	20.84	PASS
Band71	5MHz	QPSK	133147	12RB#13	20.87	PASS
Band71	5MHz	QPSK	133147	25RB#0	20.85	PASS
Band71	5MHz	QPSK	133297	1RB#0	21.97	PASS
Band71	5MHz	QPSK	133297	1RB#12	21.93	PASS
Band71	5MHz	QPSK	133297	1RB#24	21.92	PASS
Band71	5MHz	QPSK	133297	12RB#0	20.88	PASS
Band71	5MHz	QPSK	133297	12RB#6	20.86	PASS
Band71	5MHz	QPSK	133297	12RB#13	20.77	PASS
Band71	5MHz	QPSK	133297	25RB#0	20.84	PASS
Band71	5MHz	QPSK	133447	1RB#0	21.88	PASS
Band71	5MHz	QPSK	133447	1RB#12	21.80	PASS
Band71	5MHz	QPSK	133447	1RB#24	21.86	PASS
Band71	5MHz	QPSK	133447	12RB#0	20.77	PASS
Band71	5MHz	QPSK	133447	12RB#6	20.79	PASS
Band71	5MHz	QPSK	133447	12RB#13	20.69	PASS
Band71	5MHz	QPSK	133447	25RB#0	20.73	PASS
Band71	5MHz	16QAM	133147	1RB#0	20.92	PASS
Band71	5MHz	16QAM	133147	1RB#12	20.90	PASS
Band71	5MHz	16QAM	133147	1RB#24	20.95	PASS
Band71	5MHz	16QAM	133147	12RB#0	20.80	PASS
Band71	5MHz	16QAM	133147	12RB#6	20.78	PASS
Band71	5MHz	16QAM	133147	12RB#13	20.80	PASS
Band71	5MHz	16QAM	133147	25RB#0	20.87	PASS
Band71	5MHz	16QAM	133297	1RB#0	20.93	PASS
Band71	5MHz	16QAM	133297	1RB#12	20.82	PASS
Band71	5MHz	16QAM	133297	1RB#24	20.84	PASS
Band71	5MHz	16QAM	133297	12RB#0	20.83	PASS
Band71	5MHz	16QAM	133297	12RB#6	20.84	PASS
Band71	5MHz	16QAM	133297	12RB#13	20.73	PASS
Band71	5MHz	16QAM	133297	25RB#0	20.83	PASS

Band71	5MHz	16QAM	133447	1RB#0	21.03	PASS
Band71	5MHz	16QAM	133447	1RB#12	20.97	PASS
Band71	5MHz	16QAM	133447	1RB#24	21.04	PASS
Band71	5MHz	16QAM	133447	12RB#0	20.83	PASS
Band71	5MHz	16QAM	133447	12RB#6	20.84	PASS
Band71	5MHz	16QAM	133447	12RB#13	20.72	PASS
Band71	5MHz	16QAM	133447	25RB#0	20.70	PASS
Band71	10MHz	QPSK	133172	1RB#0	21.78	PASS
Band71	10MHz	QPSK	133172	1RB#24	21.85	PASS
Band71	10MHz	QPSK	133172	1RB#49	21.85	PASS
Band71	10MHz	QPSK	133172	25RB#0	20.83	PASS
Band71	10MHz	QPSK	133172	25RB#12	20.82	PASS
Band71	10MHz	QPSK	133172	25RB#25	20.90	PASS
Band71	10MHz	QPSK	133172	50RB#0	20.85	PASS
Band71	10MHz	QPSK	133297	1RB#0	21.80	PASS
Band71	10MHz	QPSK	133297	1RB#24	21.85	PASS
Band71	10MHz	QPSK	133297	1RB#49	21.81	PASS
Band71	10MHz	QPSK	133297	25RB#0	20.84	PASS
Band71	10MHz	QPSK	133297	25RB#12	20.82	PASS
Band71	10MHz	QPSK	133297	25RB#25	20.85	PASS
Band71	10MHz	QPSK	133297	50RB#0	20.86	PASS
Band71	10MHz	QPSK	133422	1RB#0	21.75	PASS
Band71	10MHz	QPSK	133422	1RB#24	21.75	PASS
Band71	10MHz	QPSK	133422	1RB#49	21.73	PASS
Band71	10MHz	QPSK	133422	25RB#0	20.85	PASS
Band71	10MHz	QPSK	133422	25RB#12	20.84	PASS
Band71	10MHz	QPSK	133422	25RB#25	20.71	PASS
Band71	10MHz	QPSK	133422	50RB#0	20.81	PASS
Band71	10MHz	16QAM	133172	1RB#0	20.99	PASS
Band71	10MHz	16QAM	133172	1RB#24	21.02	PASS
Band71	10MHz	16QAM	133172	1RB#49	21.02	PASS
Band71	10MHz	16QAM	133172	25RB#0	20.84	PASS
Band71	10MHz	16QAM	133172	25RB#12	20.82	PASS
Band71	10MHz	16QAM	133172	25RB#25	20.91	PASS
Band71	10MHz	16QAM	133172	50RB#0	20.86	PASS
Band71	10MHz	16QAM	133297	1RB#0	20.94	PASS
Band71	10MHz	16QAM	133297	1RB#24	20.96	PASS

Band71	10MHz	16QAM	133297	1RB#49	20.94	PASS
Band71	10MHz	16QAM	133297	25RB#0	20.81	PASS
Band71	10MHz	16QAM	133297	25RB#12	20.78	PASS
Band71	10MHz	16QAM	133297	25RB#25	20.81	PASS
Band71	10MHz	16QAM	133297	50RB#0	20.82	PASS
Band71	10MHz	16QAM	133422	1RB#0	20.95	PASS
Band71	10MHz	16QAM	133422	1RB#24	20.92	PASS
Band71	10MHz	16QAM	133422	1RB#49	20.91	PASS
Band71	10MHz	16QAM	133422	25RB#0	20.88	PASS
Band71	10MHz	16QAM	133422	25RB#12	20.89	PASS
Band71	10MHz	16QAM	133422	25RB#25	20.76	PASS
Band71	10MHz	16QAM	133422	50RB#0	20.80	PASS
Band71	15MHz	QPSK	133197	1RB#0	21.73	PASS
Band71	15MHz	QPSK	133197	1RB#38	21.81	PASS
Band71	15MHz	QPSK	133197	1RB#74	21.78	PASS
Band71	15MHz	QPSK	133197	38RB#0	21.06	PASS
Band71	15MHz	QPSK	133197	38RB#18	21.14	PASS
Band71	15MHz	QPSK	133197	38RB#37	21.04	PASS
Band71	15MHz	QPSK	133197	75RB#0	20.84	PASS
Band71	15MHz	QPSK	133297	1RB#0	21.81	PASS
Band71	15MHz	QPSK	133297	1RB#38	21.78	PASS
Band71	15MHz	QPSK	133297	1RB#74	21.66	PASS
Band71	15MHz	QPSK	133297	38RB#0	20.97	PASS
Band71	15MHz	QPSK	133297	38RB#18	20.95	PASS
Band71	15MHz	QPSK	133297	38RB#37	20.89	PASS
Band71	15MHz	QPSK	133297	75RB#0	20.83	PASS
Band71	15MHz	QPSK	133397	1RB#0	21.72	PASS
Band71	15MHz	QPSK	133397	1RB#38	21.72	PASS
Band71	15MHz	QPSK	133397	1RB#74	21.60	PASS
Band71	15MHz	QPSK	133397	38RB#0	21.02	PASS
Band71	15MHz	QPSK	133397	38RB#18	21.01	PASS
Band71	15MHz	QPSK	133397	38RB#37	20.93	PASS
Band71	15MHz	QPSK	133397	75RB#0	20.78	PASS
Band71	15MHz	16QAM	133197	1RB#0	21.07	PASS
Band71	15MHz	16QAM	133197	1RB#38	21.13	PASS
Band71	15MHz	16QAM	133197	1RB#74	21.11	PASS
Band71	15MHz	16QAM	133197	38RB#0	21.06	PASS

Band71	15MHz	16QAM	133197	38RB#18	21.13	PASS
Band71	15MHz	16QAM	133197	38RB#37	21.09	PASS
Band71	15MHz	16QAM	133197	75RB#0	20.84	PASS
Band71	15MHz	16QAM	133297	1RB#0	20.99	PASS
Band71	15MHz	16QAM	133297	1RB#38	20.94	PASS
Band71	15MHz	16QAM	133297	1RB#74	20.88	PASS
Band71	15MHz	16QAM	133297	38RB#0	20.98	PASS
Band71	15MHz	16QAM	133297	38RB#18	20.96	PASS
Band71	15MHz	16QAM	133297	38RB#37	20.90	PASS
Band71	15MHz	16QAM	133297	75RB#0	20.74	PASS
Band71	15MHz	16QAM	133397	1RB#0	20.99	PASS
Band71	15MHz	16QAM	133397	1RB#38	21.00	PASS
Band71	15MHz	16QAM	133397	1RB#74	20.92	PASS
Band71	15MHz	16QAM	133397	38RB#0	21.01	PASS
Band71	15MHz	16QAM	133397	38RB#18	21.00	PASS
Band71	15MHz	16QAM	133397	38RB#37	20.94	PASS
Band71	15MHz	16QAM	133397	75RB#0	20.72	PASS
Band71	20MHz	QPSK	133222	1RB#0	21.83	PASS
Band71	20MHz	QPSK	133222	1RB#49	22.05	PASS
Band71	20MHz	QPSK	133222	1RB#99	21.83	PASS
Band71	20MHz	QPSK	133222	50RB#0	20.82	PASS
Band71	20MHz	QPSK	133222	50RB#25	20.82	PASS
Band71	20MHz	QPSK	133222	50RB#50	20.83	PASS
Band71	20MHz	QPSK	133222	100RB#0	20.83	PASS
Band71	20MHz	QPSK	133322	1RB#0	21.91	PASS
Band71	20MHz	QPSK	133322	1RB#49	21.97	PASS
Band71	20MHz	QPSK	133322	1RB#99	21.86	PASS
Band71	20MHz	QPSK	133322	50RB#0	20.87	PASS
Band71	20MHz	QPSK	133322	50RB#25	20.89	PASS
Band71	20MHz	QPSK	133322	50RB#50	20.80	PASS
Band71	20MHz	QPSK	133322	100RB#0	20.83	PASS
Band71	20MHz	QPSK	133372	1RB#0	21.83	PASS
Band71	20MHz	QPSK	133372	1RB#49	21.80	PASS
Band71	20MHz	QPSK	133372	1RB#99	21.69	PASS
Band71	20MHz	QPSK	133372	50RB#0	20.78	PASS
Band71	20MHz	QPSK	133372	50RB#25	20.79	PASS
Band71	20MHz	QPSK	133372	50RB#50	20.75	PASS

Band71	20MHz	QPSK	133372	100RB#0	20.75	PASS
Band71	20MHz	16QAM	133222	1RB#0	21.04	PASS
Band71	20MHz	16QAM	133222	1RB#49	21.19	PASS
Band71	20MHz	16QAM	133222	1RB#99	21.03	PASS
Band71	20MHz	16QAM	133222	50RB#0	20.83	PASS
Band71	20MHz	16QAM	133222	50RB#25	20.81	PASS
Band71	20MHz	16QAM	133222	50RB#50	20.79	PASS
Band71	20MHz	16QAM	133222	100RB#0	20.79	PASS
Band71	20MHz	16QAM	133322	1RB#0	20.92	PASS
Band71	20MHz	16QAM	133322	1RB#49	20.90	PASS
Band71	20MHz	16QAM	133322	1RB#99	20.79	PASS
Band71	20MHz	16QAM	133322	50RB#0	20.83	PASS
Band71	20MHz	16QAM	133322	50RB#25	20.83	PASS
Band71	20MHz	16QAM	133322	50RB#50	20.76	PASS
Band71	20MHz	16QAM	133322	100RB#0	20.79	PASS
Band71	20MHz	16QAM	133372	1RB#0	21.01	PASS
Band71	20MHz	16QAM	133372	1RB#49	21.00	PASS
Band71	20MHz	16QAM	133372	1RB#99	20.92	PASS
Band71	20MHz	16QAM	133372	50RB#0	20.79	PASS
Band71	20MHz	16QAM	133372	50RB#25	20.79	PASS
Band71	20MHz	16QAM	133372	50RB#50	20.74	PASS
Band71	20MHz	16QAM	133372	100RB#0	20.71	PASS

5G NR:

Band	SCS	Bandwidth	Modulation	Channel	RB Config	Power (dBm)	Power Class	Verdict
N2	15	5	DFT-QPSK	L	Edge_1RB_Left	22.07	PC3	PASS
N2	15	5	DFT-QPSK	L	Edge_1RB_Right	22.26	PC3	PASS
N2	15	5	DFT-QPSK	L	Outer_Full	22.24	PC3	PASS
N2	15	5	DFT-QPSK	L	Inner_Full	23.16	PC3	PASS
N2	15	5	CP-QPSK	L	Edge_1RB_Left	20.80	PC3	PASS
N2	15	5	CP-QPSK	L	Edge_1RB_Right	20.98	PC3	PASS
N2	15	5	CP-QPSK	L	Outer_Full	20.97	PC3	PASS
N2	15	5	CP-QPSK	L	Inner_Full	21.47	PC3	PASS
N2	15	5	DFT-QPSK	M	Edge_1RB_Left	22.17	PC3	PASS
N2	15	5	DFT-QPSK	M	Edge_1RB_Right	22.17	PC3	PASS
N2	15	5	DFT-QPSK	M	Outer_Full	22.26	PC3	PASS
N2	15	5	DFT-QPSK	M	Inner_Full	23.24	PC3	PASS
N2	15	5	CP-QPSK	M	Edge_1RB_Left	20.21	PC3	PASS
N2	15	5	CP-QPSK	M	Edge_1RB_Right	20.29	PC3	PASS
N2	15	5	CP-QPSK	M	Outer_Full	20.22	PC3	PASS
N2	15	5	CP-QPSK	M	Inner_Full	21.74	PC3	PASS
N2	15	5	DFT-QPSK	H	Edge_1RB_Left	21.78	PC3	PASS
N2	15	5	DFT-QPSK	H	Edge_1RB_Right	21.83	PC3	PASS
N2	15	5	DFT-QPSK	H	Outer_Full	21.88	PC3	PASS
N2	15	5	DFT-QPSK	H	Inner_Full	22.87	PC3	PASS
N2	15	5	CP-QPSK	H	Edge_1RB_Left	20.90	PC3	PASS
N2	15	5	CP-QPSK	H	Edge_1RB_Right	20.76	PC3	PASS
N2	15	5	CP-QPSK	H	Outer_Full	20.85	PC3	PASS
N2	15	5	CP-QPSK	H	Inner_Full	21.34	PC3	PASS
N2	15	10	DFT-QPSK	L	Edge_1RB_Left	21.81	PC3	PASS
N2	15	10	DFT-QPSK	L	Edge_1RB_Right	21.69	PC3	PASS
N2	15	10	DFT-QPSK	L	Outer_Full	21.89	PC3	PASS
N2	15	10	DFT-QPSK	L	Inner_Full	22.97	PC3	PASS
N2	15	10	CP-QPSK	L	Edge_1RB_Left	20.78	PC3	PASS
N2	15	10	CP-QPSK	L	Edge_1RB_Right	20.75	PC3	PASS
N2	15	10	CP-QPSK	L	Outer_Full	20.90	PC3	PASS
N2	15	10	CP-QPSK	L	Inner_Full	21.39	PC3	PASS
N2	15	10	DFT-QPSK	M	Edge_1RB_Left	21.87	PC3	PASS
N2	15	10	DFT-QPSK	M	Edge_1RB_Right	21.91	PC3	PASS
N2	15	10	DFT-QPSK	M	Outer_Full	22.13	PC3	PASS
N2	15	10	DFT-QPSK	M	Inner_Full	23.09	PC3	PASS
N2	15	10	CP-QPSK	M	Edge_1RB_Left	20.95	PC3	PASS
N2	15	10	CP-QPSK	M	Edge_1RB_Right	20.97	PC3	PASS

N2	15	10	CP-QPSK	M	Outer_Full	20.17	PC3	PASS
N2	15	10	CP-QPSK	M	Inner_Full	21.56	PC3	PASS
N2	15	10	DFT-QPSK	H	Edge_1RB_Left	21.50	PC3	PASS
N2	15	10	DFT-QPSK	H	Edge_1RB_Right	21.64	PC3	PASS
N2	15	10	DFT-QPSK	H	Outer_Full	21.73	PC3	PASS
N2	15	10	DFT-QPSK	H	Inner_Full	22.63	PC3	PASS
N2	15	10	CP-QPSK	H	Edge_1RB_Left	20.52	PC3	PASS
N2	15	10	CP-QPSK	H	Edge_1RB_Right	20.59	PC3	PASS
N2	15	10	CP-QPSK	H	Outer_Full	20.70	PC3	PASS
N2	15	10	CP-QPSK	H	Inner_Full	21.15	PC3	PASS
N2	15	15	DFT-QPSK	L	Edge_1RB_Left	21.90	PC3	PASS
N2	15	15	DFT-QPSK	L	Edge_1RB_Right	21.83	PC3	PASS
N2	15	15	DFT-QPSK	L	Outer_Full	22.01	PC3	PASS
N2	15	15	DFT-QPSK	L	Inner_Full	23.03	PC3	PASS
N2	15	15	CP-QPSK	L	Edge_1RB_Left	20.87	PC3	PASS
N2	15	15	CP-QPSK	L	Edge_1RB_Right	20.70	PC3	PASS
N2	15	15	CP-QPSK	L	Outer_Full	20.96	PC3	PASS
N2	15	15	CP-QPSK	L	Inner_Full	21.53	PC3	PASS
N2	15	15	DFT-QPSK	M	Edge_1RB_Left	21.91	PC3	PASS
N2	15	15	DFT-QPSK	M	Edge_1RB_Right	22.07	PC3	PASS
N2	15	15	DFT-QPSK	M	Outer_Full	22.27	PC3	PASS
N2	15	15	DFT-QPSK	M	Inner_Full	23.28	PC3	PASS
N2	15	15	CP-QPSK	M	Edge_1RB_Left	20.92	PC3	PASS
N2	15	15	CP-QPSK	M	Edge_1RB_Right	20.90	PC3	PASS
N2	15	15	CP-QPSK	M	Outer_Full	20.26	PC3	PASS
N2	15	15	CP-QPSK	M	Inner_Full	21.79	PC3	PASS
N2	15	15	DFT-QPSK	H	Edge_1RB_Left	21.71	PC3	PASS
N2	15	15	DFT-QPSK	H	Edge_1RB_Right	21.81	PC3	PASS
N2	15	15	DFT-QPSK	H	Outer_Full	21.86	PC3	PASS
N2	15	15	DFT-QPSK	H	Inner_Full	22.78	PC3	PASS
N2	15	15	CP-QPSK	H	Edge_1RB_Left	20.69	PC3	PASS
N2	15	15	CP-QPSK	H	Edge_1RB_Right	20.75	PC3	PASS
N2	15	15	CP-QPSK	H	Outer_Full	20.90	PC3	PASS
N2	15	15	CP-QPSK	H	Inner_Full	21.37	PC3	PASS
N2	15	20	DFT-QPSK	L	Edge_1RB_Left	21.94	PC3	PASS
N2	15	20	DFT-QPSK	L	Edge_1RB_Right	21.78	PC3	PASS
N2	15	20	DFT-QPSK	L	Outer_Full	22.00	PC3	PASS
N2	15	20	DFT-QPSK	L	Inner_Full	23.04	PC3	PASS
N2	15	20	CP-QPSK	L	Edge_1RB_Left	20.92	PC3	PASS
N2	15	20	CP-QPSK	L	Edge_1RB_Right	20.82	PC3	PASS
N2	15	20	CP-QPSK	L	Outer_Full	20.97	PC3	PASS
N2	15	20	CP-QPSK	L	Inner_Full	21.60	PC3	PASS

N2	15	20	DFT-QPSK	M	Edge_1RB_Left	21.91	PC3	PASS
N2	15	20	DFT-QPSK	M	Edge_1RB_Right	21.92	PC3	PASS
N2	15	20	DFT-QPSK	M	Outer_Full	22.37	PC3	PASS
N2	15	20	DFT-QPSK	M	Inner_Full	23.30	PC3	PASS
N2	15	20	CP-QPSK	M	Edge_1RB_Left	20.87	PC3	PASS
N2	15	20	CP-QPSK	M	Edge_1RB_Right	20.06	PC3	PASS
N2	15	20	CP-QPSK	M	Outer_Full	20.36	PC3	PASS
N2	15	20	CP-QPSK	M	Inner_Full	21.77	PC3	PASS
N2	15	20	DFT-QPSK	H	Edge_1RB_Left	21.85	PC3	PASS
N2	15	20	DFT-QPSK	H	Edge_1RB_Right	21.73	PC3	PASS
N2	15	20	DFT-QPSK	H	Outer_Full	21.95	PC3	PASS
N2	15	20	DFT-QPSK	H	Inner_Full	22.84	PC3	PASS
N2	15	20	CP-QPSK	H	Edge_1RB_Left	20.95	PC3	PASS
N2	15	20	CP-QPSK	H	Edge_1RB_Right	20.76	PC3	PASS
N2	15	20	CP-QPSK	H	Outer_Full	20.79	PC3	PASS
N2	15	20	CP-QPSK	H	Inner_Full	21.34	PC3	PASS

5G NR(P4): Sensor ON

Band	SCS	Bandwidth	Modulation	Channel	RB Config	Power (dBm)	Power Class	Verdict
N2	15	5	DFT-QPSK	L	Edge_1RB_Left	19.09	PC3	PASS
N2	15	5	DFT-QPSK	L	Edge_1RB_Right	19.21	PC3	PASS
N2	15	5	DFT-QPSK	L	Outer_Full	19.31	PC3	PASS
N2	15	5	DFT-QPSK	L	Inner_Full	20.12	PC3	PASS
N2	15	5	CP-QPSK	L	Edge_1RB_Left	17.78	PC3	PASS
N2	15	5	CP-QPSK	L	Edge_1RB_Right	17.93	PC3	PASS
N2	15	5	CP-QPSK	L	Outer_Full	17.87	PC3	PASS
N2	15	5	CP-QPSK	L	Inner_Full	18.51	PC3	PASS
N2	15	5	DFT-QPSK	M	Edge_1RB_Left	19.12	PC3	PASS
N2	15	5	DFT-QPSK	M	Edge_1RB_Right	19.16	PC3	PASS
N2	15	5	DFT-QPSK	M	Outer_Full	19.22	PC3	PASS
N2	15	5	DFT-QPSK	M	Inner_Full	20.21	PC3	PASS
N2	15	5	CP-QPSK	M	Edge_1RB_Left	17.19	PC3	PASS
N2	15	5	CP-QPSK	M	Edge_1RB_Right	17.22	PC3	PASS
N2	15	5	CP-QPSK	M	Outer_Full	17.13	PC3	PASS
N2	15	5	CP-QPSK	M	Inner_Full	18.72	PC3	PASS
N2	15	5	DFT-QPSK	H	Edge_1RB_Left	18.68	PC3	PASS
N2	15	5	DFT-QPSK	H	Edge_1RB_Right	18.72	PC3	PASS
N2	15	5	DFT-QPSK	H	Outer_Full	18.72	PC3	PASS
N2	15	5	DFT-QPSK	H	Inner_Full	19.68	PC3	PASS
N2	15	5	CP-QPSK	H	Edge_1RB_Left	17.86	PC3	PASS

N2	15	5	CP-QPSK	H	Edge_1RB_Right	17.71	PC3	PASS
N2	15	5	CP-QPSK	H	Outer_Full	17.81	PC3	PASS
N2	15	5	CP-QPSK	H	Inner_Full	18.56	PC3	PASS
N2	15	10	DFT-QPSK	L	Edge_1RB_Left	18.78	PC3	PASS
N2	15	10	DFT-QPSK	L	Edge_1RB_Right	18.65	PC3	PASS
N2	15	10	DFT-QPSK	L	Outer_Full	18.57	PC3	PASS
N2	15	10	DFT-QPSK	L	Inner_Full	19.69	PC3	PASS
N2	15	10	CP-QPSK	L	Edge_1RB_Left	17.79	PC3	PASS
N2	15	10	CP-QPSK	L	Edge_1RB_Right	17.65	PC3	PASS
N2	15	10	CP-QPSK	L	Outer_Full	17.87	PC3	PASS
N2	15	10	CP-QPSK	L	Inner_Full	18.45	PC3	PASS
N2	15	10	DFT-QPSK	M	Edge_1RB_Left	18.69	PC3	PASS
N2	15	10	DFT-QPSK	M	Edge_1RB_Right	18.87	PC3	PASS
N2	15	10	DFT-QPSK	M	Outer_Full	19.12	PC3	PASS
N2	15	10	DFT-QPSK	M	Inner_Full	20.06	PC3	PASS
N2	15	10	CP-QPSK	M	Edge_1RB_Left	17.91	PC3	PASS
N2	15	10	CP-QPSK	M	Edge_1RB_Right	17.68	PC3	PASS
N2	15	10	CP-QPSK	M	Outer_Full	17.17	PC3	PASS
N2	15	10	CP-QPSK	M	Inner_Full	18.15	PC3	PASS
N2	15	10	DFT-QPSK	H	Edge_1RB_Left	18.36	PC3	PASS
N2	15	10	DFT-QPSK	H	Edge_1RB_Right	18.87	PC3	PASS
N2	15	10	DFT-QPSK	H	Outer_Full	18.45	PC3	PASS
N2	15	10	DFT-QPSK	H	Inner_Full	19.62	PC3	PASS
N2	15	10	CP-QPSK	H	Edge_1RB_Left	17.15	PC3	PASS
N2	15	10	CP-QPSK	H	Edge_1RB_Right	17.25	PC3	PASS
N2	15	10	CP-QPSK	H	Outer_Full	17.95	PC3	PASS
N2	15	10	CP-QPSK	H	Inner_Full	18.57	PC3	PASS
N2	15	15	DFT-QPSK	L	Edge_1RB_Left	18.87	PC3	PASS
N2	15	15	DFT-QPSK	L	Edge_1RB_Right	18.69	PC3	PASS
N2	15	15	DFT-QPSK	L	Outer_Full	19.06	PC3	PASS
N2	15	15	DFT-QPSK	L	Inner_Full	20.09	PC3	PASS
N2	15	15	CP-QPSK	L	Edge_1RB_Left	17.75	PC3	PASS
N2	15	15	CP-QPSK	L	Edge_1RB_Right	17.73	PC3	PASS
N2	15	15	CP-QPSK	L	Outer_Full	17.65	PC3	PASS
N2	15	15	CP-QPSK	L	Inner_Full	18.89	PC3	PASS
N2	15	15	DFT-QPSK	M	Edge_1RB_Left	18.87	PC3	PASS
N2	15	15	DFT-QPSK	M	Edge_1RB_Right	19.45	PC3	PASS
N2	15	15	DFT-QPSK	M	Outer_Full	19.26	PC3	PASS
N2	15	15	DFT-QPSK	M	Inner_Full	20.36	PC3	PASS
N2	15	15	CP-QPSK	M	Edge_1RB_Left	17.58	PC3	PASS
N2	15	15	CP-QPSK	M	Edge_1RB_Right	17.87	PC3	PASS
N2	15	15	CP-QPSK	M	Outer_Full	17.35	PC3	PASS

N2	15	15	CP-QPSK	M	Inner_Full	18.75	PC3	PASS
N2	15	15	DFT-QPSK	H	Edge_1RB_Left	18.69	PC3	PASS
N2	15	15	DFT-QPSK	H	Edge_1RB_Right	18.78	PC3	PASS
N2	15	15	DFT-QPSK	H	Outer_Full	18.69	PC3	PASS
N2	15	15	DFT-QPSK	H	Inner_Full	19.87	PC3	PASS
N2	15	15	CP-QPSK	H	Edge_1RB_Left	17.45	PC3	PASS
N2	15	15	CP-QPSK	H	Edge_1RB_Right	17.36	PC3	PASS
N2	15	15	CP-QPSK	H	Outer_Full	17.68	PC3	PASS
N2	15	15	CP-QPSK	H	Inner_Full	18.46	PC3	PASS
N2	15	20	DFT-QPSK	L	Edge_1RB_Left	18.87	PC3	PASS
N2	15	20	DFT-QPSK	L	Edge_1RB_Right	18.63	PC3	PASS
N2	15	20	DFT-QPSK	L	Outer_Full	19.69	PC3	PASS
N2	15	20	DFT-QPSK	L	Inner_Full	20.12	PC3	PASS
N2	15	20	CP-QPSK	L	Edge_1RB_Left	17.65	PC3	PASS
N2	15	20	CP-QPSK	L	Edge_1RB_Right	17.58	PC3	PASS
N2	15	20	CP-QPSK	L	Outer_Full	17.87	PC3	PASS
N2	15	20	CP-QPSK	L	Inner_Full	18.56	PC3	PASS
N2	15	20	DFT-QPSK	M	Edge_1RB_Left	18.68	PC3	PASS
N2	15	20	DFT-QPSK	M	Edge_1RB_Right	18.79	PC3	PASS
N2	15	20	DFT-QPSK	M	Outer_Full	19.45	PC3	PASS
N2	15	20	DFT-QPSK	M	Inner_Full	20.36	PC3	PASS
N2	15	20	CP-QPSK	M	Edge_1RB_Left	17.58	PC3	PASS
N2	15	20	CP-QPSK	M	Edge_1RB_Right	17.98	PC3	PASS
N2	15	20	CP-QPSK	M	Outer_Full	17.78	PC3	PASS
N2	15	20	CP-QPSK	M	Inner_Full	18.25	PC3	PASS
N2	15	20	DFT-QPSK	H	Edge_1RB_Left	18.36	PC3	PASS
N2	15	20	DFT-QPSK	H	Edge_1RB_Right	18.54	PC3	PASS
N2	15	20	DFT-QPSK	H	Outer_Full	18.92	PC3	PASS
N2	15	20	DFT-QPSK	H	Inner_Full	19.64	PC3	PASS
N2	15	20	CP-QPSK	H	Edge_1RB_Left	17.64	PC3	PASS
N2	15	20	CP-QPSK	H	Edge_1RB_Right	17.24	PC3	PASS
N2	15	20	CP-QPSK	H	Outer_Full	17.45	PC3	PASS
N2	15	20	CP-QPSK	H	Inner_Full	18.36	PC3	PASS

5G NR(P2): Receiver ON

Band	SCS	Bandwidth	Modulation	Channel	RB Config	Power (dBm)	Power Class	Verdict
N2	15	5	DFT-QPSK	L	Edge_1RB_Left	14.28	PC3	PASS
N2	15	5	DFT-QPSK	L	Edge_1RB_Right	14.28	PC3	PASS
N2	15	5	DFT-QPSK	L	Outer_Full	14.20	PC3	PASS

N2	15	5	DFT-QPSK	L	Inner_Full	14.33	PC3	PASS
N2	15	5	CP-QPSK	L	Edge_1RB_Left	14.24	PC3	PASS
N2	15	5	CP-QPSK	L	Edge_1RB_Right	14.29	PC3	PASS
N2	15	5	CP-QPSK	L	Outer_Full	14.28	PC3	PASS
N2	15	5	CP-QPSK	L	Inner_Full	14.31	PC3	PASS
N2	15	5	DFT-QPSK	M	Edge_1RB_Left	14.48	PC3	PASS
N2	15	5	DFT-QPSK	M	Edge_1RB_Right	14.36	PC3	PASS
N2	15	5	DFT-QPSK	M	Outer_Full	14.46	PC3	PASS
N2	15	5	DFT-QPSK	M	Inner_Full	14.47	PC3	PASS
N2	15	5	CP-QPSK	M	Edge_1RB_Left	14.48	PC3	PASS
N2	15	5	CP-QPSK	M	Edge_1RB_Right	14.42	PC3	PASS
N2	15	5	CP-QPSK	M	Outer_Full	14.46	PC3	PASS
N2	15	5	CP-QPSK	M	Inner_Full	14.40	PC3	PASS
N2	15	5	DFT-QPSK	H	Edge_1RB_Left	13.99	PC3	PASS
N2	15	5	DFT-QPSK	H	Edge_1RB_Right	13.94	PC3	PASS
N2	15	5	DFT-QPSK	H	Outer_Full	14.02	PC3	PASS
N2	15	5	DFT-QPSK	H	Inner_Full	13.96	PC3	PASS
N2	15	5	CP-QPSK	H	Edge_1RB_Left	13.97	PC3	PASS
N2	15	5	CP-QPSK	H	Edge_1RB_Right	13.93	PC3	PASS
N2	15	5	CP-QPSK	H	Outer_Full	13.95	PC3	PASS
N2	15	5	CP-QPSK	H	Inner_Full	13.99	PC3	PASS
N2	15	10	DFT-QPSK	L	Edge_1RB_Left	14.09	PC3	PASS
N2	15	10	DFT-QPSK	L	Edge_1RB_Right	13.97	PC3	PASS
N2	15	10	DFT-QPSK	L	Outer_Full	14.09	PC3	PASS
N2	15	10	DFT-QPSK	L	Inner_Full	13.94	PC3	PASS
N2	15	10	CP-QPSK	L	Edge_1RB_Left	14.10	PC3	PASS
N2	15	10	CP-QPSK	L	Edge_1RB_Right	13.97	PC3	PASS
N2	15	10	CP-QPSK	L	Outer_Full	14.10	PC3	PASS
N2	15	10	CP-QPSK	L	Inner_Full	13.90	PC3	PASS
N2	15	10	DFT-QPSK	M	Edge_1RB_Left	14.27	PC3	PASS
N2	15	10	DFT-QPSK	M	Edge_1RB_Right	14.04	PC3	PASS
N2	15	10	DFT-QPSK	M	Outer_Full	14.31	PC3	PASS
N2	15	10	DFT-QPSK	M	Inner_Full	14.16	PC3	PASS
N2	15	10	CP-QPSK	M	Edge_1RB_Left	14.25	PC3	PASS
N2	15	10	CP-QPSK	M	Edge_1RB_Right	14.21	PC3	PASS
N2	15	10	CP-QPSK	M	Outer_Full	14.33	PC3	PASS
N2	15	10	CP-QPSK	M	Inner_Full	14.13	PC3	PASS
N2	15	10	DFT-QPSK	H	Edge_1RB_Left	13.79	PC3	PASS
N2	15	10	DFT-QPSK	H	Edge_1RB_Right	13.61	PC3	PASS
N2	15	10	DFT-QPSK	H	Outer_Full	13.80	PC3	PASS
N2	15	10	DFT-QPSK	H	Inner_Full	13.67	PC3	PASS
N2	15	10	CP-QPSK	H	Edge_1RB_Left	13.73	PC3	PASS

N2	15	10	CP-QPSK	H	Edge_1RB_Right	13.73	PC3	PASS
N2	15	10	CP-QPSK	H	Outer_Full	13.73	PC3	PASS
N2	15	10	CP-QPSK	H	Inner_Full	13.62	PC3	PASS
N2	15	15	DFT-QPSK	L	Edge_1RB_Left	14.23	PC3	PASS
N2	15	15	DFT-QPSK	L	Edge_1RB_Right	14.05	PC3	PASS
N2	15	15	DFT-QPSK	L	Outer_Full	14.20	PC3	PASS
N2	15	15	DFT-QPSK	L	Inner_Full	13.92	PC3	PASS
N2	15	15	CP-QPSK	L	Edge_1RB_Left	14.16	PC3	PASS
N2	15	15	CP-QPSK	L	Edge_1RB_Right	14.06	PC3	PASS
N2	15	15	CP-QPSK	L	Outer_Full	14.23	PC3	PASS
N2	15	15	CP-QPSK	L	Inner_Full	13.94	PC3	PASS
N2	15	15	DFT-QPSK	M	Edge_1RB_Left	14.38	PC3	PASS
N2	15	15	DFT-QPSK	M	Edge_1RB_Right	14.00	PC3	PASS
N2	15	15	DFT-QPSK	M	Outer_Full	14.35	PC3	PASS
N2	15	15	DFT-QPSK	M	Inner_Full	14.19	PC3	PASS
N2	15	15	CP-QPSK	M	Edge_1RB_Left	14.41	PC3	PASS
N2	15	15	CP-QPSK	M	Edge_1RB_Right	14.12	PC3	PASS
N2	15	15	CP-QPSK	M	Outer_Full	14.38	PC3	PASS
N2	15	15	CP-QPSK	M	Inner_Full	14.23	PC3	PASS
N2	15	15	DFT-QPSK	H	Edge_1RB_Left	13.84	PC3	PASS
N2	15	15	DFT-QPSK	H	Edge_1RB_Right	13.79	PC3	PASS
N2	15	15	DFT-QPSK	H	Outer_Full	13.90	PC3	PASS
N2	15	15	DFT-QPSK	H	Inner_Full	13.71	PC3	PASS
N2	15	15	CP-QPSK	H	Edge_1RB_Left	13.89	PC3	PASS
N2	15	15	CP-QPSK	H	Edge_1RB_Right	13.74	PC3	PASS
N2	15	15	CP-QPSK	H	Outer_Full	13.94	PC3	PASS
N2	15	15	CP-QPSK	H	Inner_Full	13.74	PC3	PASS
N2	15	20	DFT-QPSK	L	Edge_1RB_Left	14.15	PC3	PASS
N2	15	20	DFT-QPSK	L	Edge_1RB_Right	14.10	PC3	PASS
N2	15	20	DFT-QPSK	L	Outer_Full	14.24	PC3	PASS
N2	15	20	DFT-QPSK	L	Inner_Full	13.97	PC3	PASS
N2	15	20	CP-QPSK	L	Edge_1RB_Left	14.15	PC3	PASS
N2	15	20	CP-QPSK	L	Edge_1RB_Right	14.15	PC3	PASS
N2	15	20	CP-QPSK	L	Outer_Full	14.17	PC3	PASS
N2	15	20	CP-QPSK	L	Inner_Full	13.93	PC3	PASS
N2	15	20	DFT-QPSK	M	Edge_1RB_Left	14.51	PC3	PASS
N2	15	20	DFT-QPSK	M	Edge_1RB_Right	13.95	PC3	PASS
N2	15	20	DFT-QPSK	M	Outer_Full	14.49	PC3	PASS
N2	15	20	DFT-QPSK	M	Inner_Full	14.04	PC3	PASS
N2	15	20	CP-QPSK	M	Edge_1RB_Left	14.50	PC3	PASS
N2	15	20	CP-QPSK	M	Edge_1RB_Right	13.99	PC3	PASS
N2	15	20	CP-QPSK	M	Outer_Full	14.40	PC3	PASS

N2	15	20	CP-QPSK	M	Inner_Full	14.04	PC3	PASS
N2	15	20	DFT-QPSK	H	Edge_1RB_Left	13.87	PC3	PASS
N2	15	20	DFT-QPSK	H	Edge_1RB_Right	13.90	PC3	PASS
N2	15	20	DFT-QPSK	H	Outer_Full	13.93	PC3	PASS
N2	15	20	DFT-QPSK	H	Inner_Full	13.72	PC3	PASS
N2	15	20	CP-QPSK	H	Edge_1RB_Left	13.90	PC3	PASS
N2	15	20	CP-QPSK	H	Edge_1RB_Right	13.89	PC3	PASS
N2	15	20	CP-QPSK	H	Outer_Full	13.91	PC3	PASS
N2	15	20	CP-QPSK	H	Inner_Full	13.72	PC3	PASS

5G NR(P3):

Band	SCS	Bandwidth	Modulation	Channel	RB Config	Power (dBm)	Power Class	Verdict
N2	15	5	DFT-QPSK	L	Edge_1RB_Left	20.30	PC3	PASS
N2	15	5	DFT-QPSK	L	Edge_1RB_Right	20.18	PC3	PASS
N2	15	5	DFT-QPSK	L	Outer_Full	20.39	PC3	PASS
N2	15	5	DFT-QPSK	L	Inner_Full	20.24	PC3	PASS
N2	15	5	CP-QPSK	L	Edge_1RB_Left	20.35	PC3	PASS
N2	15	5	CP-QPSK	L	Edge_1RB_Right	20.21	PC3	PASS
N2	15	5	CP-QPSK	L	Outer_Full	20.39	PC3	PASS
N2	15	5	CP-QPSK	L	Inner_Full	20.27	PC3	PASS
N2	15	5	DFT-QPSK	M	Edge_1RB_Left	20.53	PC3	PASS
N2	15	5	DFT-QPSK	M	Edge_1RB_Right	20.33	PC3	PASS
N2	15	5	DFT-QPSK	M	Outer_Full	20.46	PC3	PASS
N2	15	5	DFT-QPSK	M	Inner_Full	20.45	PC3	PASS
N2	15	5	CP-QPSK	M	Edge_1RB_Left	20.50	PC3	PASS
N2	15	5	CP-QPSK	M	Edge_1RB_Right	20.54	PC3	PASS
N2	15	5	CP-QPSK	M	Outer_Full	20.49	PC3	PASS
N2	15	5	CP-QPSK	M	Inner_Full	20.51	PC3	PASS
N2	15	5	DFT-QPSK	H	Edge_1RB_Left	20.09	PC3	PASS
N2	15	5	DFT-QPSK	H	Edge_1RB_Right	19.91	PC3	PASS
N2	15	5	DFT-QPSK	H	Outer_Full	20.09	PC3	PASS
N2	15	5	DFT-QPSK	H	Inner_Full	19.93	PC3	PASS
N2	15	5	CP-QPSK	H	Edge_1RB_Left	20.09	PC3	PASS
N2	15	5	CP-QPSK	H	Edge_1RB_Right	19.96	PC3	PASS
N2	15	5	CP-QPSK	H	Outer_Full	20.11	PC3	PASS
N2	15	5	CP-QPSK	H	Inner_Full	19.97	PC3	PASS
N2	15	10	DFT-QPSK	L	Edge_1RB_Left	20.12	PC3	PASS
N2	15	10	DFT-QPSK	L	Edge_1RB_Right	19.96	PC3	PASS
N2	15	10	DFT-QPSK	L	Outer_Full	20.21	PC3	PASS
N2	15	10	DFT-QPSK	L	Inner_Full	19.95	PC3	PASS

N2	15	10	CP-QPSK	L	Edge_1RB_Left	20.10	PC3	PASS
N2	15	10	CP-QPSK	L	Edge_1RB_Right	20.00	PC3	PASS
N2	15	10	CP-QPSK	L	Outer_Full	20.15	PC3	PASS
N2	15	10	CP-QPSK	L	Inner_Full	20.10	PC3	PASS
N2	15	10	DFT-QPSK	M	Edge_1RB_Left	20.13	PC3	PASS
N2	15	10	DFT-QPSK	M	Edge_1RB_Right	20.07	PC3	PASS
N2	15	10	DFT-QPSK	M	Outer_Full	20.11	PC3	PASS
N2	15	10	DFT-QPSK	M	Inner_Full	20.28	PC3	PASS
N2	15	10	CP-QPSK	M	Edge_1RB_Left	20.18	PC3	PASS
N2	15	10	CP-QPSK	M	Edge_1RB_Right	20.21	PC3	PASS
N2	15	10	CP-QPSK	M	Outer_Full	19.81	PC3	PASS
N2	15	10	CP-QPSK	M	Inner_Full	19.64	PC3	PASS
N2	15	10	DFT-QPSK	H	Edge_1RB_Left	19.81	PC3	PASS
N2	15	10	DFT-QPSK	H	Edge_1RB_Right	19.69	PC3	PASS
N2	15	10	DFT-QPSK	H	Outer_Full	19.82	PC3	PASS
N2	15	10	DFT-QPSK	H	Inner_Full	19.78	PC3	PASS
N2	15	10	CP-QPSK	H	Edge_1RB_Left	19.81	PC3	PASS
N2	15	10	CP-QPSK	H	Edge_1RB_Right	19.70	PC3	PASS
N2	15	10	CP-QPSK	H	Outer_Full	20.23	PC3	PASS
N2	15	10	CP-QPSK	H	Inner_Full	20.05	PC3	PASS
N2	15	15	DFT-QPSK	L	Edge_1RB_Left	20.26	PC3	PASS
N2	15	15	DFT-QPSK	L	Edge_1RB_Right	19.93	PC3	PASS
N2	15	15	DFT-QPSK	L	Outer_Full	20.24	PC3	PASS
N2	15	15	DFT-QPSK	L	Inner_Full	20.21	PC3	PASS
N2	15	15	CP-QPSK	L	Edge_1RB_Left	20.27	PC3	PASS
N2	15	15	CP-QPSK	L	Edge_1RB_Right	19.92	PC3	PASS
N2	15	15	CP-QPSK	L	Outer_Full	20.30	PC3	PASS
N2	15	15	CP-QPSK	L	Inner_Full	20.18	PC3	PASS
N2	15	15	DFT-QPSK	M	Edge_1RB_Left	20.18	PC3	PASS
N2	15	15	DFT-QPSK	M	Edge_1RB_Right	20.44	PC3	PASS
N2	15	15	DFT-QPSK	M	Outer_Full	20.10	PC3	PASS
N2	15	15	DFT-QPSK	M	Inner_Full	20.42	PC3	PASS
N2	15	15	CP-QPSK	M	Edge_1RB_Left	20.50	PC3	PASS
N2	15	15	CP-QPSK	M	Edge_1RB_Right	20.14	PC3	PASS
N2	15	15	CP-QPSK	M	Outer_Full	20.43	PC3	PASS
N2	15	15	CP-QPSK	M	Inner_Full	20.24	PC3	PASS
N2	15	15	DFT-QPSK	H	Edge_1RB_Left	19.94	PC3	PASS
N2	15	15	DFT-QPSK	H	Edge_1RB_Right	19.79	PC3	PASS
N2	15	15	DFT-QPSK	H	Outer_Full	19.96	PC3	PASS
N2	15	15	DFT-QPSK	H	Inner_Full	19.81	PC3	PASS
N2	15	15	CP-QPSK	H	Edge_1RB_Left	20.04	PC3	PASS
N2	15	15	CP-QPSK	H	Edge_1RB_Right	19.99	PC3	PASS

N2	15	15	CP-QPSK	H	Outer_Full	19.99	PC3	PASS
N2	15	15	CP-QPSK	H	Inner_Full	19.89	PC3	PASS
N2	15	20	DFT-QPSK	L	Edge_1RB_Left	20.27	PC3	PASS
N2	15	20	DFT-QPSK	L	Edge_1RB_Right	20.10	PC3	PASS
N2	15	20	DFT-QPSK	L	Outer_Full	20.36	PC3	PASS
N2	15	20	DFT-QPSK	L	Inner_Full	20.01	PC3	PASS
N2	15	20	CP-QPSK	L	Edge_1RB_Left	20.29	PC3	PASS
N2	15	20	CP-QPSK	L	Edge_1RB_Right	20.12	PC3	PASS
N2	15	20	CP-QPSK	L	Outer_Full	20.37	PC3	PASS
N2	15	20	CP-QPSK	L	Inner_Full	20.17	PC3	PASS
N2	15	20	DFT-QPSK	M	Edge_1RB_Left	20.43	PC3	PASS
N2	15	20	DFT-QPSK	M	Edge_1RB_Right	20.08	PC3	PASS
N2	15	20	DFT-QPSK	M	Outer_Full	20.55	PC3	PASS
N2	15	20	DFT-QPSK	M	Inner_Full	20.07	PC3	PASS
N2	15	20	CP-QPSK	M	Edge_1RB_Left	20.54	PC3	PASS
N2	15	20	CP-QPSK	M	Edge_1RB_Right	20.00	PC3	PASS
N2	15	20	CP-QPSK	M	Outer_Full	20.40	PC3	PASS
N2	15	20	CP-QPSK	M	Inner_Full	20.00	PC3	PASS
N2	15	20	DFT-QPSK	H	Edge_1RB_Left	19.95	PC3	PASS
N2	15	20	DFT-QPSK	H	Edge_1RB_Right	19.92	PC3	PASS
N2	15	20	DFT-QPSK	H	Outer_Full	19.97	PC3	PASS
N2	15	20	DFT-QPSK	H	Inner_Full	19.77	PC3	PASS
N2	15	20	CP-QPSK	H	Edge_1RB_Left	19.98	PC3	PASS
N2	15	20	CP-QPSK	H	Edge_1RB_Right	20.07	PC3	PASS
N2	15	20	CP-QPSK	H	Outer_Full	20.00	PC3	PASS
N2	15	20	CP-QPSK	H	Inner_Full	19.75	PC3	PASS

Band	SCS	Bandwidth	Modulation	Channel	RB Config	Power (dBm)	Power Class	Verdict
N5	15	5	DFT-QPSK	L	Edge_1RB_Left	20.90	PC3	PASS
N5	15	5	DFT-QPSK	L	Edge_1RB_Right	20.76	PC3	PASS
N5	15	5	DFT-QPSK	L	Outer_Full	20.99	PC3	PASS
N5	15	5	DFT-QPSK	L	Inner_Full	21.92	PC3	PASS
N5	15	5	CP-QPSK	L	Edge_1RB_Left	20.77	PC3	PASS
N5	15	5	CP-QPSK	L	Edge_1RB_Right	20.87	PC3	PASS
N5	15	5	CP-QPSK	L	Outer_Full	20.82	PC3	PASS
N5	15	5	CP-QPSK	L	Inner_Full	20.25	PC3	PASS
N5	15	5	DFT-QPSK	M	Edge_1RB_Left	20.94	PC3	PASS
N5	15	5	DFT-QPSK	M	Edge_1RB_Right	21.02	PC3	PASS
N5	15	5	DFT-QPSK	M	Outer_Full	20.88	PC3	PASS
N5	15	5	DFT-QPSK	M	Inner_Full	21.90	PC3	PASS

N5	15	5	CP-QPSK	M	Edge_1RB_Left	20.85	PC3	PASS
N5	15	5	CP-QPSK	M	Edge_1RB_Right	20.14	PC3	PASS
N5	15	5	CP-QPSK	M	Outer_Full	20.85	PC3	PASS
N5	15	5	CP-QPSK	M	Inner_Full	20.07	PC3	PASS
N5	15	5	DFT-QPSK	H	Edge_1RB_Left	21.07	PC3	PASS
N5	15	5	DFT-QPSK	H	Edge_1RB_Right	21.03	PC3	PASS
N5	15	5	DFT-QPSK	H	Outer_Full	21.16	PC3	PASS
N5	15	5	DFT-QPSK	H	Inner_Full	22.04	PC3	PASS
N5	15	5	CP-QPSK	H	Edge_1RB_Left	20.00	PC3	PASS
N5	15	5	CP-QPSK	H	Edge_1RB_Right	20.82	PC3	PASS
N5	15	5	CP-QPSK	H	Outer_Full	20.04	PC3	PASS
N5	15	5	CP-QPSK	H	Inner_Full	20.46	PC3	PASS
N5	15	10	DFT-QPSK	L	Edge_1RB_Left	20.63	PC3	PASS
N5	15	10	DFT-QPSK	L	Edge_1RB_Right	20.78	PC3	PASS
N5	15	10	DFT-QPSK	L	Outer_Full	20.74	PC3	PASS
N5	15	10	DFT-QPSK	L	Inner_Full	21.81	PC3	PASS
N5	15	10	CP-QPSK	L	Edge_1RB_Left	20.78	PC3	PASS
N5	15	10	CP-QPSK	L	Edge_1RB_Right	20.83	PC3	PASS
N5	15	10	CP-QPSK	L	Outer_Full	20.66	PC3	PASS
N5	15	10	CP-QPSK	L	Inner_Full	20.28	PC3	PASS
N5	15	10	DFT-QPSK	M	Edge_1RB_Left	20.75	PC3	PASS
N5	15	10	DFT-QPSK	M	Edge_1RB_Right	20.76	PC3	PASS
N5	15	10	DFT-QPSK	M	Outer_Full	20.81	PC3	PASS
N5	15	10	DFT-QPSK	M	Inner_Full	21.88	PC3	PASS
N5	15	10	CP-QPSK	M	Edge_1RB_Left	20.97	PC3	PASS
N5	15	10	CP-QPSK	M	Edge_1RB_Right	20.86	PC3	PASS
N5	15	10	CP-QPSK	M	Outer_Full	20.73	PC3	PASS
N5	15	10	CP-QPSK	M	Inner_Full	20.34	PC3	PASS
N5	15	10	DFT-QPSK	H	Edge_1RB_Left	20.85	PC3	PASS
N5	15	10	DFT-QPSK	H	Edge_1RB_Right	20.67	PC3	PASS
N5	15	10	DFT-QPSK	H	Outer_Full	20.88	PC3	PASS
N5	15	10	DFT-QPSK	H	Inner_Full	21.87	PC3	PASS
N5	15	10	CP-QPSK	H	Edge_1RB_Left	20.93	PC3	PASS
N5	15	10	CP-QPSK	H	Edge_1RB_Right	20.95	PC3	PASS
N5	15	10	CP-QPSK	H	Outer_Full	20.74	PC3	PASS
N5	15	10	CP-QPSK	H	Inner_Full	20.42	PC3	PASS
N5	15	15	DFT-QPSK	L	Outer_Full	20.77	PC3	PASS
N5	15	15	DFT-QPSK	L	Edge_1RB_Left	20.58	PC3	PASS
N5	15	15	DFT-QPSK	L	Inner_Full	21.90	PC3	PASS
N5	15	15	DFT-QPSK	L	Edge_1RB_Right	20.95	PC3	PASS
N5	15	15	CP-QPSK	L	Outer_Full	20.83	PC3	PASS
N5	15	15	CP-QPSK	L	Edge_1RB_Left	20.67	PC3	PASS

N5	15	15	CP-QPSK	L	Inner_Full	20.32	PC3	PASS
N5	15	15	CP-QPSK	L	Edge_1RB_Right	20.86	PC3	PASS
N5	15	15	DFT-QPSK	M	Edge_1RB_Right	20.85	PC3	PASS
N5	15	15	DFT-QPSK	M	Outer_Full	20.99	PC3	PASS
N5	15	15	DFT-QPSK	M	Inner_Full	22.01	PC3	PASS
N5	15	15	CP-QPSK	M	Edge_1RB_Left	20.95	PC3	PASS
N5	15	15	CP-QPSK	M	Edge_1RB_Right	20.91	PC3	PASS
N5	15	15	CP-QPSK	M	Outer_Full	20.00	PC3	PASS
N5	15	15	CP-QPSK	M	Inner_Full	20.46	PC3	PASS
N5	15	15	DFT-QPSK	M	Edge_1RB_Left	20.76	PC3	PASS
N5	15	15	DFT-QPSK	H	Outer_Full	21.08	PC3	PASS
N5	15	15	DFT-QPSK	H	Edge_1RB_Left	20.88	PC3	PASS
N5	15	15	DFT-QPSK	H	Inner_Full	22.10	PC3	PASS
N5	15	15	DFT-QPSK	H	Edge_1RB_Right	20.89	PC3	PASS
N5	15	15	CP-QPSK	H	Outer_Full	20.10	PC3	PASS
N5	15	15	CP-QPSK	H	Edge_1RB_Left	20.07	PC3	PASS
N5	15	15	CP-QPSK	H	Inner_Full	20.54	PC3	PASS
N5	15	15	CP-QPSK	H	Edge_1RB_Right	20.04	PC3	PASS
N5	15	20	DFT-QPSK	L	Edge_1RB_Left	20.68	PC3	PASS
N5	15	20	DFT-QPSK	L	Edge_1RB_Right	20.97	PC3	PASS
N5	15	20	DFT-QPSK	L	Outer_Full	20.90	PC3	PASS
N5	15	20	DFT-QPSK	L	Inner_Full	22.02	PC3	PASS
N5	15	20	CP-QPSK	L	Edge_1RB_Left	20.85	PC3	PASS
N5	15	20	CP-QPSK	L	Edge_1RB_Right	20.91	PC3	PASS
N5	15	20	CP-QPSK	L	Outer_Full	20.86	PC3	PASS
N5	15	20	CP-QPSK	L	Inner_Full	20.49	PC3	PASS
N5	15	20	DFT-QPSK	M	Outer_Full	20.96	PC3	PASS
N5	15	20	DFT-QPSK	M	Edge_1RB_Left	20.67	PC3	PASS
N5	15	20	DFT-QPSK	M	Inner_Full	22.05	PC3	PASS
N5	15	20	DFT-QPSK	M	Edge_1RB_Right	20.81	PC3	PASS
N5	15	20	CP-QPSK	M	Outer_Full	20.77	PC3	PASS
N5	15	20	CP-QPSK	M	Edge_1RB_Left	20.77	PC3	PASS
N5	15	20	CP-QPSK	M	Inner_Full	20.51	PC3	PASS
N5	15	20	CP-QPSK	M	Edge_1RB_Right	20.02	PC3	PASS
N5	15	20	DFT-QPSK	H	Outer_Full	20.96	PC3	PASS
N5	15	20	DFT-QPSK	H	Edge_1RB_Left	20.85	PC3	PASS
N5	15	20	DFT-QPSK	H	Inner_Full	22.16	PC3	PASS
N5	15	20	DFT-QPSK	H	Edge_1RB_Right	20.62	PC3	PASS
N5	15	20	CP-QPSK	H	Outer_Full	20.89	PC3	PASS
N5	15	20	CP-QPSK	H	Edge_1RB_Left	20.86	PC3	PASS
N5	15	20	CP-QPSK	H	Inner_Full	20.54	PC3	PASS
N5	15	20	CP-QPSK	H	Edge_1RB_Right	20.85	PC3	PASS

5G NR(P1):

Band	SCS	Bandwidth	Modulation	Channel	RB Config	Power (dBm)	Power Class	Verdict
N25	15	5	DFT-QPSK	L	Outer_Full	22.12	PC3	PASS
N25	15	5	DFT-QPSK	L	Edge_1RB_Left	22.05	PC3	PASS
N25	15	5	DFT-QPSK	L	Inner_Full	23.21	PC3	PASS
N25	15	5	DFT-QPSK	L	Edge_1RB_Right	22.13	PC3	PASS
N25	15	5	CP-QPSK	L	Outer_Full	20.09	PC3	PASS
N25	15	5	CP-QPSK	L	Edge_1RB_Left	20.45	PC3	PASS
N25	15	5	CP-QPSK	L	Inner_Full	21.68	PC3	PASS
N25	15	5	CP-QPSK	L	Edge_1RB_Right	20.43	PC3	PASS
N25	15	5	DFT-QPSK	M	Outer_Full	22.45	PC3	PASS
N25	15	5	DFT-QPSK	M	Edge_1RB_Left	22.53	PC3	PASS
N25	15	5	DFT-QPSK	M	Inner_Full	23.44	PC3	PASS
N25	15	5	DFT-QPSK	M	Edge_1RB_Right	22.45	PC3	PASS
N25	15	5	CP-QPSK	M	Outer_Full	20.47	PC3	PASS
N25	15	5	CP-QPSK	M	Edge_1RB_Left	20.55	PC3	PASS
N25	15	5	CP-QPSK	M	Inner_Full	21.91	PC3	PASS
N25	15	5	CP-QPSK	M	Edge_1RB_Right	20.63	PC3	PASS
N25	15	5	DFT-QPSK	H	Outer_Full	21.88	PC3	PASS
N25	15	5	DFT-QPSK	H	Edge_1RB_Left	22.03	PC3	PASS
N25	15	5	DFT-QPSK	H	Inner_Full	22.94	PC3	PASS
N25	15	5	DFT-QPSK	H	Edge_1RB_Right	22.00	PC3	PASS
N25	15	5	CP-QPSK	H	Outer_Full	19.86	PC3	PASS
N25	15	5	CP-QPSK	H	Edge_1RB_Left	20.31	PC3	PASS
N25	15	5	CP-QPSK	H	Inner_Full	21.43	PC3	PASS
N25	15	5	CP-QPSK	H	Edge_1RB_Right	20.15	PC3	PASS
N25	15	10	DFT-QPSK	L	Outer_Full	21.95	PC3	PASS
N25	15	10	DFT-QPSK	L	Edge_1RB_Left	21.96	PC3	PASS
N25	15	10	DFT-QPSK	L	Inner_Full	23.06	PC3	PASS
N25	15	10	DFT-QPSK	L	Edge_1RB_Right	22.02	PC3	PASS
N25	15	10	CP-QPSK	L	Outer_Full	19.84	PC3	PASS
N25	15	10	CP-QPSK	L	Edge_1RB_Left	20.13	PC3	PASS
N25	15	10	CP-QPSK	L	Inner_Full	21.50	PC3	PASS
N25	15	10	CP-QPSK	L	Edge_1RB_Right	20.21	PC3	PASS
N25	15	10	DFT-QPSK	M	Outer_Full	22.23	PC3	PASS
N25	15	10	DFT-QPSK	M	Edge_1RB_Left	22.28	PC3	PASS
N25	15	10	DFT-QPSK	M	Inner_Full	23.31	PC3	PASS
N25	15	10	DFT-QPSK	M	Edge_1RB_Right	22.22	PC3	PASS
N25	15	10	CP-QPSK	M	Outer_Full	20.14	PC3	PASS
N25	15	10	CP-QPSK	M	Edge_1RB_Left	20.49	PC3	PASS

N25	15	10	CP-QPSK	M	Inner_Full	21.73	PC3	PASS
N25	15	10	CP-QPSK	M	Edge_1RB_Right	20.38	PC3	PASS
N25	15	10	DFT-QPSK	H	Outer_Full	21.70	PC3	PASS
N25	15	10	DFT-QPSK	H	Edge_1RB_Left	21.83	PC3	PASS
N25	15	10	DFT-QPSK	H	Inner_Full	22.81	PC3	PASS
N25	15	10	DFT-QPSK	H	Edge_1RB_Right	21.70	PC3	PASS
N25	15	10	CP-QPSK	H	Outer_Full	19.66	PC3	PASS
N25	15	10	CP-QPSK	H	Edge_1RB_Left	20.00	PC3	PASS
N25	15	10	CP-QPSK	H	Inner_Full	21.28	PC3	PASS
N25	15	10	CP-QPSK	H	Edge_1RB_Right	19.86	PC3	PASS
N25	15	15	DFT-QPSK	L	Outer_Full	22.12	PC3	PASS
N25	15	15	DFT-QPSK	L	Edge_1RB_Left	21.98	PC3	PASS
N25	15	15	DFT-QPSK	L	Inner_Full	23.17	PC3	PASS
N25	15	15	DFT-QPSK	L	Edge_1RB_Right	21.92	PC3	PASS
N25	15	15	CP-QPSK	L	Outer_Full	20.11	PC3	PASS
N25	15	15	CP-QPSK	L	Edge_1RB_Left	20.08	PC3	PASS
N25	15	15	CP-QPSK	L	Inner_Full	21.67	PC3	PASS
N25	15	15	CP-QPSK	L	Edge_1RB_Right	20.22	PC3	PASS
N25	15	15	DFT-QPSK	M	Outer_Full	22.39	PC3	PASS
N25	15	15	DFT-QPSK	M	Edge_1RB_Left	22.12	PC3	PASS
N25	15	15	DFT-QPSK	M	Inner_Full	23.36	PC3	PASS
N25	15	15	DFT-QPSK	M	Edge_1RB_Right	22.09	PC3	PASS
N25	15	15	CP-QPSK	M	Outer_Full	20.45	PC3	PASS
N25	15	15	CP-QPSK	M	Edge_1RB_Left	20.28	PC3	PASS
N25	15	15	CP-QPSK	M	Inner_Full	21.91	PC3	PASS
N25	15	15	CP-QPSK	M	Edge_1RB_Right	20.31	PC3	PASS
N25	15	15	DFT-QPSK	H	Outer_Full	21.97	PC3	PASS
N25	15	15	DFT-QPSK	H	Edge_1RB_Left	21.78	PC3	PASS
N25	15	15	DFT-QPSK	H	Inner_Full	22.96	PC3	PASS
N25	15	15	DFT-QPSK	H	Edge_1RB_Right	21.79	PC3	PASS
N25	15	15	CP-QPSK	H	Outer_Full	19.94	PC3	PASS
N25	15	15	CP-QPSK	H	Edge_1RB_Left	19.83	PC3	PASS
N25	15	15	CP-QPSK	H	Inner_Full	21.48	PC3	PASS
N25	15	15	CP-QPSK	H	Edge_1RB_Right	19.93	PC3	PASS
N25	15	20	DFT-QPSK	L	Outer_Full	22.09	PC3	PASS
N25	15	20	DFT-QPSK	L	Edge_1RB_Left	22.04	PC3	PASS
N25	15	20	DFT-QPSK	L	Inner_Full	23.45	PC3	PASS
N25	15	20	DFT-QPSK	L	Edge_1RB_Right	22.02	PC3	PASS
N25	15	20	CP-QPSK	L	Outer_Full	20.05	PC3	PASS
N25	15	20	CP-QPSK	L	Edge_1RB_Left	20.28	PC3	PASS
N25	15	20	CP-QPSK	L	Inner_Full	21.66	PC3	PASS
N25	15	20	CP-QPSK	L	Edge_1RB_Right	20.24	PC3	PASS

N25	15	20	DFT-QPSK	M	Outer_Full	22.43	PC3	PASS
N25	15	20	DFT-QPSK	M	Edge_1RB_Left	22.09	PC3	PASS
N25	15	20	DFT-QPSK	M	Inner_Full	23.42	PC3	PASS
N25	15	20	DFT-QPSK	M	Edge_1RB_Right	22.08	PC3	PASS
N25	15	20	CP-QPSK	M	Outer_Full	20.34	PC3	PASS
N25	15	20	CP-QPSK	M	Edge_1RB_Left	20.46	PC3	PASS
N25	15	20	CP-QPSK	M	Inner_Full	21.88	PC3	PASS
N25	15	20	CP-QPSK	M	Edge_1RB_Right	20.16	PC3	PASS
N25	15	20	DFT-QPSK	H	Outer_Full	22.00	PC3	PASS
N25	15	20	DFT-QPSK	H	Edge_1RB_Left	21.96	PC3	PASS
N25	15	20	DFT-QPSK	H	Inner_Full	22.95	PC3	PASS
N25	15	20	DFT-QPSK	H	Edge_1RB_Right	21.94	PC3	PASS
N25	15	20	CP-QPSK	H	Outer_Full	19.90	PC3	PASS
N25	15	20	CP-QPSK	H	Edge_1RB_Left	20.21	PC3	PASS
N25	15	20	CP-QPSK	H	Inner_Full	21.45	PC3	PASS
N25	15	20	CP-QPSK	H	Edge_1RB_Right	20.13	PC3	PASS

5G NR(P4): Sensor ON

Band	SCS	Bandwidth	Modulation	Channel	RB Config	Power (dBm)	Power Class	Verdict
N25	15	5	DFT-QPSK	L	Outer_Full	20.31	PC3	PASS
N25	15	5	DFT-QPSK	L	Edge_1RB_Left	20.36	PC3	PASS
N25	15	5	DFT-QPSK	L	Inner_Full	20.21	PC3	PASS
N25	15	5	DFT-QPSK	L	Edge_1RB_Right	20.42	PC3	PASS
N25	15	5	CP-QPSK	L	Outer_Full	20.38	PC3	PASS
N25	15	5	CP-QPSK	L	Edge_1RB_Left	20.46	PC3	PASS
N25	15	5	CP-QPSK	L	Inner_Full	20.42	PC3	PASS
N25	15	5	CP-QPSK	L	Edge_1RB_Right	20.43	PC3	PASS
N25	15	5	DFT-QPSK	M	Outer_Full	20.49	PC3	PASS
N25	15	5	DFT-QPSK	M	Edge_1RB_Left	20.56	PC3	PASS
N25	15	5	DFT-QPSK	M	Inner_Full	20.54	PC3	PASS
N25	15	5	DFT-QPSK	M	Edge_1RB_Right	20.34	PC3	PASS
N25	15	5	CP-QPSK	M	Outer_Full	20.56	PC3	PASS
N25	15	5	CP-QPSK	M	Edge_1RB_Left	20.53	PC3	PASS
N25	15	5	CP-QPSK	M	Inner_Full	20.53	PC3	PASS
N25	15	5	CP-QPSK	M	Edge_1RB_Right	20.55	PC3	PASS
N25	15	5	DFT-QPSK	H	Outer_Full	19.98	PC3	PASS
N25	15	5	DFT-QPSK	H	Edge_1RB_Left	19.92	PC3	PASS
N25	15	5	DFT-QPSK	H	Inner_Full	20.03	PC3	PASS
N25	15	5	DFT-QPSK	H	Edge_1RB_Right	19.98	PC3	PASS
N25	15	5	CP-QPSK	H	Outer_Full	20.06	PC3	PASS

N25	15	5	CP-QPSK	H	Edge_1RB_Left	20.11	PC3	PASS
N25	15	5	CP-QPSK	H	Inner_Full	20.04	PC3	PASS
N25	15	5	CP-QPSK	H	Edge_1RB_Right	20.21	PC3	PASS
N25	15	10	DFT-QPSK	L	Outer_Full	20.17	PC3	PASS
N25	15	10	DFT-QPSK	L	Edge_1RB_Left	20.14	PC3	PASS
N25	15	10	DFT-QPSK	L	Inner_Full	20.24	PC3	PASS
N25	15	10	DFT-QPSK	L	Edge_1RB_Right	20.03	PC3	PASS
N25	15	10	CP-QPSK	L	Outer_Full	20.21	PC3	PASS
N25	15	10	CP-QPSK	L	Edge_1RB_Left	20.37	PC3	PASS
N25	15	10	CP-QPSK	L	Inner_Full	20.23	PC3	PASS
N25	15	10	CP-QPSK	L	Edge_1RB_Right	20.39	PC3	PASS
N25	15	10	DFT-QPSK	M	Outer_Full	20.34	PC3	PASS
N25	15	10	DFT-QPSK	M	Edge_1RB_Left	20.31	PC3	PASS
N25	15	10	DFT-QPSK	M	Inner_Full	20.33	PC3	PASS
N25	15	10	DFT-QPSK	M	Edge_1RB_Right	20.11	PC3	PASS
N25	15	10	CP-QPSK	M	Outer_Full	20.36	PC3	PASS
N25	15	10	CP-QPSK	M	Edge_1RB_Left	20.44	PC3	PASS
N25	15	10	CP-QPSK	M	Inner_Full	20.26	PC3	PASS
N25	15	10	CP-QPSK	M	Edge_1RB_Right	20.43	PC3	PASS
N25	15	10	DFT-QPSK	H	Outer_Full	19.83	PC3	PASS
N25	15	10	DFT-QPSK	H	Edge_1RB_Left	19.79	PC3	PASS
N25	15	10	DFT-QPSK	H	Inner_Full	19.83	PC3	PASS
N25	15	10	DFT-QPSK	H	Edge_1RB_Right	19.86	PC3	PASS
N25	15	10	CP-QPSK	H	Outer_Full	19.85	PC3	PASS
N25	15	10	CP-QPSK	H	Edge_1RB_Left	20.07	PC3	PASS
N25	15	10	CP-QPSK	H	Inner_Full	19.85	PC3	PASS
N25	15	10	CP-QPSK	H	Edge_1RB_Right	19.92	PC3	PASS
N25	15	15	DFT-QPSK	L	Outer_Full	20.27	PC3	PASS
N25	15	15	DFT-QPSK	L	Edge_1RB_Left	20.18	PC3	PASS
N25	15	15	DFT-QPSK	L	Inner_Full	20.33	PC3	PASS
N25	15	15	DFT-QPSK	L	Edge_1RB_Right	20.13	PC3	PASS
N25	15	15	CP-QPSK	L	Outer_Full	20.33	PC3	PASS
N25	15	15	CP-QPSK	L	Edge_1RB_Left	20.32	PC3	PASS
N25	15	15	CP-QPSK	L	Inner_Full	20.33	PC3	PASS
N25	15	15	CP-QPSK	L	Edge_1RB_Right	20.15	PC3	PASS
N25	15	15	DFT-QPSK	M	Outer_Full	20.49	PC3	PASS
N25	15	15	DFT-QPSK	M	Edge_1RB_Left	20.24	PC3	PASS
N25	15	15	DFT-QPSK	M	Inner_Full	20.48	PC3	PASS
N25	15	15	DFT-QPSK	M	Edge_1RB_Right	20.26	PC3	PASS
N25	15	15	CP-QPSK	M	Outer_Full	20.49	PC3	PASS
N25	15	15	CP-QPSK	M	Edge_1RB_Left	20.49	PC3	PASS
N25	15	15	CP-QPSK	M	Inner_Full	20.54	PC3	PASS

N25	15	15	CP-QPSK	M	Edge_1RB_Right	20.38	PC3	PASS
N25	15	15	DFT-QPSK	H	Outer_Full	20.01	PC3	PASS
N25	15	15	DFT-QPSK	H	Edge_1RB_Left	19.85	PC3	PASS
N25	15	15	DFT-QPSK	H	Inner_Full	20.00	PC3	PASS
N25	15	15	DFT-QPSK	H	Edge_1RB_Right	19.98	PC3	PASS
N25	15	15	CP-QPSK	H	Outer_Full	20.04	PC3	PASS
N25	15	15	CP-QPSK	H	Edge_1RB_Left	19.97	PC3	PASS
N25	15	15	CP-QPSK	H	Inner_Full	20.08	PC3	PASS
N25	15	15	CP-QPSK	H	Edge_1RB_Right	20.15	PC3	PASS
N25	15	20	DFT-QPSK	L	Outer_Full	20.30	PC3	PASS
N25	15	20	DFT-QPSK	L	Edge_1RB_Left	20.24	PC3	PASS
N25	15	20	DFT-QPSK	L	Inner_Full	20.32	PC3	PASS
N25	15	20	DFT-QPSK	L	Edge_1RB_Right	20.15	PC3	PASS
N25	15	20	CP-QPSK	L	Outer_Full	20.31	PC3	PASS
N25	15	20	CP-QPSK	L	Edge_1RB_Left	20.42	PC3	PASS
N25	15	20	CP-QPSK	L	Inner_Full	20.37	PC3	PASS
N25	15	20	CP-QPSK	L	Edge_1RB_Right	20.33	PC3	PASS
N25	15	20	DFT-QPSK	M	Outer_Full	20.44	PC3	PASS
N25	15	20	DFT-QPSK	M	Edge_1RB_Left	20.19	PC3	PASS
N25	15	20	DFT-QPSK	M	Inner_Full	20.76	PC3	PASS
N25	15	20	DFT-QPSK	M	Edge_1RB_Right	20.10	PC3	PASS
N25	15	20	CP-QPSK	M	Outer_Full	20.49	PC3	PASS
N25	15	20	CP-QPSK	M	Edge_1RB_Left	20.39	PC3	PASS
N25	15	20	CP-QPSK	M	Inner_Full	20.51	PC3	PASS
N25	15	20	CP-QPSK	M	Edge_1RB_Right	20.25	PC3	PASS
N25	15	20	DFT-QPSK	H	Outer_Full	20.06	PC3	PASS
N25	15	20	DFT-QPSK	H	Edge_1RB_Left	19.96	PC3	PASS
N25	15	20	DFT-QPSK	H	Inner_Full	20.05	PC3	PASS
N25	15	20	DFT-QPSK	H	Edge_1RB_Right	19.83	PC3	PASS
N25	15	20	CP-QPSK	H	Outer_Full	19.97	PC3	PASS
N25	15	20	CP-QPSK	H	Edge_1RB_Left	20.06	PC3	PASS
N25	15	20	CP-QPSK	H	Inner_Full	20.05	PC3	PASS
N25	15	20	CP-QPSK	H	Edge_1RB_Right	20.04	PC3	PASS

5G NR(PC2): Receiver ON

Band	SCS	Bandwidth	Modulation	Channel	RB Config	Power (dBm)	Power Class	Verdict
N25	15	5	DFT-QPSK	L	Outer_Full	14.27	PC3	PASS
N25	15	5	DFT-QPSK	L	Edge_1RB_Left	14.28	PC3	PASS
N25	15	5	DFT-QPSK	L	Inner_Full	14.22	PC3	PASS
N25	15	5	DFT-QPSK	L	Edge_1RB_Right	14.34	PC3	PASS
N25	15	5	CP-QPSK	L	Outer_Full	14.27	PC3	PASS
N25	15	5	CP-QPSK	L	Edge_1RB_Left	14.19	PC3	PASS
N25	15	5	CP-QPSK	L	Inner_Full	14.28	PC3	PASS
N25	15	5	CP-QPSK	L	Edge_1RB_Right	14.17	PC3	PASS
N25	15	5	DFT-QPSK	M	Outer_Full	14.43	PC3	PASS
N25	15	5	DFT-QPSK	M	Edge_1RB_Left	14.42	PC3	PASS
N25	15	5	DFT-QPSK	M	Inner_Full	14.42	PC3	PASS
N25	15	5	DFT-QPSK	M	Edge_1RB_Right	14.32	PC3	PASS
N25	15	5	CP-QPSK	M	Outer_Full	14.45	PC3	PASS
N25	15	5	CP-QPSK	M	Edge_1RB_Left	14.42	PC3	PASS
N25	15	5	CP-QPSK	M	Inner_Full	14.38	PC3	PASS
N25	15	5	CP-QPSK	M	Edge_1RB_Right	14.43	PC3	PASS
N25	15	5	DFT-QPSK	H	Outer_Full	13.93	PC3	PASS
N25	15	5	DFT-QPSK	H	Edge_1RB_Left	13.95	PC3	PASS
N25	15	5	DFT-QPSK	H	Inner_Full	13.98	PC3	PASS
N25	15	5	DFT-QPSK	H	Edge_1RB_Right	13.88	PC3	PASS
N25	15	5	CP-QPSK	H	Outer_Full	13.86	PC3	PASS
N25	15	5	CP-QPSK	H	Edge_1RB_Left	13.92	PC3	PASS
N25	15	5	CP-QPSK	H	Inner_Full	13.89	PC3	PASS
N25	15	5	CP-QPSK	H	Edge_1RB_Right	13.83	PC3	PASS
N25	15	10	DFT-QPSK	L	Outer_Full	14.05	PC3	PASS
N25	15	10	DFT-QPSK	L	Edge_1RB_Left	13.98	PC3	PASS
N25	15	10	DFT-QPSK	L	Inner_Full	14.14	PC3	PASS
N25	15	10	DFT-QPSK	L	Edge_1RB_Right	13.86	PC3	PASS
N25	15	10	CP-QPSK	L	Outer_Full	14.08	PC3	PASS
N25	15	10	CP-QPSK	L	Edge_1RB_Left	13.86	PC3	PASS
N25	15	10	CP-QPSK	L	Inner_Full	14.14	PC3	PASS
N25	15	10	CP-QPSK	L	Edge_1RB_Right	13.84	PC3	PASS
N25	15	10	DFT-QPSK	M	Outer_Full	14.28	PC3	PASS
N25	15	10	DFT-QPSK	M	Edge_1RB_Left	14.09	PC3	PASS
N25	15	10	DFT-QPSK	M	Inner_Full	14.26	PC3	PASS
N25	15	10	DFT-QPSK	M	Edge_1RB_Right	14.02	PC3	PASS
N25	15	10	CP-QPSK	M	Outer_Full	14.25	PC3	PASS
N25	15	10	CP-QPSK	M	Edge_1RB_Left	14.16	PC3	PASS

N25	15	10	CP-QPSK	M	Inner_Full	14.16	PC3	PASS
N25	15	10	CP-QPSK	M	Edge_1RB_Right	14.01	PC3	PASS
N25	15	10	DFT-QPSK	H	Outer_Full	13.73	PC3	PASS
N25	15	10	DFT-QPSK	H	Edge_1RB_Left	13.64	PC3	PASS
N25	15	10	DFT-QPSK	H	Inner_Full	13.80	PC3	PASS
N25	15	10	DFT-QPSK	H	Edge_1RB_Right	13.61	PC3	PASS
N25	15	10	CP-QPSK	H	Outer_Full	13.63	PC3	PASS
N25	15	10	CP-QPSK	H	Edge_1RB_Left	13.70	PC3	PASS
N25	15	10	CP-QPSK	H	Inner_Full	13.75	PC3	PASS
N25	15	10	CP-QPSK	H	Edge_1RB_Right	13.56	PC3	PASS
N25	15	15	DFT-QPSK	L	Outer_Full	14.20	PC3	PASS
N25	15	15	DFT-QPSK	L	Edge_1RB_Left	14.00	PC3	PASS
N25	15	15	DFT-QPSK	L	Inner_Full	14.23	PC3	PASS
N25	15	15	DFT-QPSK	L	Edge_1RB_Right	13.92	PC3	PASS
N25	15	15	CP-QPSK	L	Outer_Full	14.21	PC3	PASS
N25	15	15	CP-QPSK	L	Edge_1RB_Left	13.99	PC3	PASS
N25	15	15	CP-QPSK	L	Inner_Full	14.22	PC3	PASS
N25	15	15	CP-QPSK	L	Edge_1RB_Right	13.91	PC3	PASS
N25	15	15	DFT-QPSK	M	Outer_Full	14.39	PC3	PASS
N25	15	15	DFT-QPSK	M	Edge_1RB_Left	14.10	PC3	PASS
N25	15	15	DFT-QPSK	M	Inner_Full	14.42	PC3	PASS
N25	15	15	DFT-QPSK	M	Edge_1RB_Right	14.11	PC3	PASS
N25	15	15	CP-QPSK	M	Outer_Full	14.47	PC3	PASS
N25	15	15	CP-QPSK	M	Edge_1RB_Left	14.15	PC3	PASS
N25	15	15	CP-QPSK	M	Inner_Full	14.38	PC3	PASS
N25	15	15	CP-QPSK	M	Edge_1RB_Right	14.03	PC3	PASS
N25	15	15	DFT-QPSK	H	Outer_Full	13.96	PC3	PASS
N25	15	15	DFT-QPSK	H	Edge_1RB_Left	13.77	PC3	PASS
N25	15	15	DFT-QPSK	H	Inner_Full	13.90	PC3	PASS
N25	15	15	DFT-QPSK	H	Edge_1RB_Right	13.75	PC3	PASS
N25	15	15	CP-QPSK	H	Outer_Full	13.87	PC3	PASS
N25	15	15	CP-QPSK	H	Edge_1RB_Left	13.73	PC3	PASS
N25	15	15	CP-QPSK	H	Inner_Full	13.90	PC3	PASS
N25	15	15	CP-QPSK	H	Edge_1RB_Right	13.72	PC3	PASS
N25	15	20	DFT-QPSK	L	Outer_Full	14.17	PC3	PASS
N25	15	20	DFT-QPSK	L	Edge_1RB_Left	14.03	PC3	PASS
N25	15	20	DFT-QPSK	L	Inner_Full	14.23	PC3	PASS
N25	15	20	DFT-QPSK	L	Edge_1RB_Right	13.86	PC3	PASS
N25	15	20	CP-QPSK	L	Outer_Full	14.18	PC3	PASS
N25	15	20	CP-QPSK	L	Edge_1RB_Left	14.03	PC3	PASS
N25	15	20	CP-QPSK	L	Inner_Full	14.15	PC3	PASS
N25	15	20	CP-QPSK	L	Edge_1RB_Right	13.81	PC3	PASS

N25	15	20	DFT-QPSK	M	Outer_Full	14.48	PC3	PASS
N25	15	20	DFT-QPSK	M	Edge_1RB_Left	14.04	PC3	PASS
N25	15	20	DFT-QPSK	M	Inner_Full	14.38	PC3	PASS
N25	15	20	DFT-QPSK	M	Edge_1RB_Right	13.87	PC3	PASS
N25	15	20	CP-QPSK	M	Outer_Full	14.28	PC3	PASS
N25	15	20	CP-QPSK	M	Edge_1RB_Left	14.01	PC3	PASS
N25	15	20	CP-QPSK	M	Inner_Full	14.32	PC3	PASS
N25	15	20	CP-QPSK	M	Edge_1RB_Right	13.87	PC3	PASS
N25	15	20	DFT-QPSK	H	Outer_Full	13.97	PC3	PASS
N25	15	20	DFT-QPSK	H	Edge_1RB_Left	13.76	PC3	PASS
N25	15	20	DFT-QPSK	H	Inner_Full	13.87	PC3	PASS
N25	15	20	DFT-QPSK	H	Edge_1RB_Right	13.67	PC3	PASS
N25	15	20	CP-QPSK	H	Outer_Full	13.78	PC3	PASS
N25	15	20	CP-QPSK	H	Edge_1RB_Left	13.64	PC3	PASS
N25	15	20	CP-QPSK	H	Inner_Full	13.89	PC3	PASS
N25	15	20	CP-QPSK	H	Edge_1RB_Right	13.68	PC3	PASS

5G NR(P3):

Band	SCS	Bandwidth	Modulation	Channel	RB Config	Power (dBm)	Power Class	Verdict
N25	15	5	DFT-QPSK	L	Outer_Full	20.30	PC3	PASS
N25	15	5	DFT-QPSK	L	Edge_1RB_Left	20.23	PC3	PASS
N25	15	5	DFT-QPSK	L	Inner_Full	20.11	PC3	PASS
N25	15	5	DFT-QPSK	L	Edge_1RB_Right	20.29	PC3	PASS
N25	15	5	CP-QPSK	L	Outer_Full	20.22	PC3	PASS
N25	15	5	CP-QPSK	L	Edge_1RB_Left	20.33	PC3	PASS
N25	15	5	CP-QPSK	L	Inner_Full	20.24	PC3	PASS
N25	15	5	CP-QPSK	L	Edge_1RB_Right	20.28	PC3	PASS
N25	15	5	DFT-QPSK	M	Outer_Full	20.42	PC3	PASS
N25	15	5	DFT-QPSK	M	Edge_1RB_Left	20.34	PC3	PASS
N25	15	5	DFT-QPSK	M	Inner_Full	20.50	PC3	PASS
N25	15	5	DFT-QPSK	M	Edge_1RB_Right	20.33	PC3	PASS
N25	15	5	CP-QPSK	M	Outer_Full	20.51	PC3	PASS
N25	15	5	CP-QPSK	M	Edge_1RB_Left	20.55	PC3	PASS
N25	15	5	CP-QPSK	M	Inner_Full	20.34	PC3	PASS
N25	15	5	CP-QPSK	M	Edge_1RB_Right	20.69	PC3	PASS
N25	15	5	DFT-QPSK	H	Outer_Full	19.90	PC3	PASS
N25	15	5	DFT-QPSK	H	Edge_1RB_Left	19.83	PC3	PASS
N25	15	5	DFT-QPSK	H	Inner_Full	19.96	PC3	PASS
N25	15	5	DFT-QPSK	H	Edge_1RB_Right	19.85	PC3	PASS
N25	15	5	CP-QPSK	H	Outer_Full	20.01	PC3	PASS

N25	15	5	CP-QPSK	H	Edge_1RB_Left	20.10	PC3	PASS
N25	15	5	CP-QPSK	H	Inner_Full	19.96	PC3	PASS
N25	15	5	CP-QPSK	H	Edge_1RB_Right	20.01	PC3	PASS
N25	15	10	DFT-QPSK	L	Outer_Full	20.14	PC3	PASS
N25	15	10	DFT-QPSK	L	Edge_1RB_Left	20.03	PC3	PASS
N25	15	10	DFT-QPSK	L	Inner_Full	20.18	PC3	PASS
N25	15	10	DFT-QPSK	L	Edge_1RB_Right	20.01	PC3	PASS
N25	15	10	CP-QPSK	L	Outer_Full	20.17	PC3	PASS
N25	15	10	CP-QPSK	L	Edge_1RB_Left	20.19	PC3	PASS
N25	15	10	CP-QPSK	L	Inner_Full	20.16	PC3	PASS
N25	15	10	CP-QPSK	L	Edge_1RB_Right	20.10	PC3	PASS
N25	15	10	DFT-QPSK	M	Outer_Full	20.34	PC3	PASS
N25	15	10	DFT-QPSK	M	Edge_1RB_Left	20.14	PC3	PASS
N25	15	10	DFT-QPSK	M	Inner_Full	20.32	PC3	PASS
N25	15	10	DFT-QPSK	M	Edge_1RB_Right	20.08	PC3	PASS
N25	15	10	CP-QPSK	M	Outer_Full	20.35	PC3	PASS
N25	15	10	CP-QPSK	M	Edge_1RB_Left	20.33	PC3	PASS
N25	15	10	CP-QPSK	M	Inner_Full	20.25	PC3	PASS
N25	15	10	CP-QPSK	M	Edge_1RB_Right	20.19	PC3	PASS
N25	15	10	DFT-QPSK	H	Outer_Full	19.77	PC3	PASS
N25	15	10	DFT-QPSK	H	Edge_1RB_Left	19.78	PC3	PASS
N25	15	10	DFT-QPSK	H	Inner_Full	19.84	PC3	PASS
N25	15	10	DFT-QPSK	H	Edge_1RB_Right	19.77	PC3	PASS
N25	15	10	CP-QPSK	H	Outer_Full	19.80	PC3	PASS
N25	15	10	CP-QPSK	H	Edge_1RB_Left	19.60	PC3	PASS
N25	15	10	CP-QPSK	H	Inner_Full	19.83	PC3	PASS
N25	15	10	CP-QPSK	H	Edge_1RB_Right	19.55	PC3	PASS
N25	15	15	DFT-QPSK	L	Outer_Full	20.29	PC3	PASS
N25	15	15	DFT-QPSK	L	Edge_1RB_Left	20.11	PC3	PASS
N25	15	15	DFT-QPSK	L	Inner_Full	20.28	PC3	PASS
N25	15	15	DFT-QPSK	L	Edge_1RB_Right	20.05	PC3	PASS
N25	15	15	CP-QPSK	L	Outer_Full	20.38	PC3	PASS
N25	15	15	CP-QPSK	L	Edge_1RB_Left	20.07	PC3	PASS
N25	15	15	CP-QPSK	L	Inner_Full	20.34	PC3	PASS
N25	15	15	CP-QPSK	L	Edge_1RB_Right	19.91	PC3	PASS
N25	15	15	DFT-QPSK	M	Outer_Full	20.42	PC3	PASS
N25	15	15	DFT-QPSK	M	Edge_1RB_Left	20.29	PC3	PASS
N25	15	15	DFT-QPSK	M	Inner_Full	20.45	PC3	PASS
N25	15	15	DFT-QPSK	M	Edge_1RB_Right	20.51	PC3	PASS
N25	15	15	CP-QPSK	M	Outer_Full	20.27	PC3	PASS
N25	15	15	CP-QPSK	M	Edge_1RB_Left	20.45	PC3	PASS
N25	15	15	CP-QPSK	M	Inner_Full	20.10	PC3	PASS

N25	15	15	CP-QPSK	M	Edge_1RB_Right	20.02	PC3	PASS
N25	15	15	DFT-QPSK	H	Outer_Full	19.82	PC3	PASS
N25	15	15	DFT-QPSK	H	Edge_1RB_Left	19.99	PC3	PASS
N25	15	15	DFT-QPSK	H	Inner_Full	19.90	PC3	PASS
N25	15	15	DFT-QPSK	H	Edge_1RB_Right	20.07	PC3	PASS
N25	15	15	CP-QPSK	H	Outer_Full	19.71	PC3	PASS
N25	15	15	CP-QPSK	H	Edge_1RB_Left	20.08	PC3	PASS
N25	15	15	CP-QPSK	H	Inner_Full	19.72	PC3	PASS
N25	15	15	CP-QPSK	H	Edge_1RB_Right	20.42	PC3	PASS
N25	15	20	DFT-QPSK	L	Outer_Full	20.35	PC3	PASS
N25	15	20	DFT-QPSK	L	Edge_1RB_Left	20.24	PC3	PASS
N25	15	20	DFT-QPSK	L	Inner_Full	20.10	PC3	PASS
N25	15	20	DFT-QPSK	L	Edge_1RB_Right	20.24	PC3	PASS
N25	15	20	CP-QPSK	L	Outer_Full	20.02	PC3	PASS
N25	15	20	CP-QPSK	L	Edge_1RB_Left	20.22	PC3	PASS
N25	15	20	CP-QPSK	L	Inner_Full	20.35	PC3	PASS
N25	15	20	CP-QPSK	L	Edge_1RB_Right	20.30	PC3	PASS
N25	15	20	DFT-QPSK	M	Outer_Full	20.39	PC3	PASS
N25	15	20	DFT-QPSK	M	Edge_1RB_Left	20.17	PC3	PASS
N25	15	20	DFT-QPSK	M	Inner_Full	20.76	PC3	PASS
N25	15	20	DFT-QPSK	M	Edge_1RB_Right	19.98	PC3	PASS
N25	15	20	CP-QPSK	M	Outer_Full	20.48	PC3	PASS
N25	15	20	CP-QPSK	M	Edge_1RB_Left	20.49	PC3	PASS
N25	15	20	CP-QPSK	M	Inner_Full	20.48	PC3	PASS
N25	15	20	CP-QPSK	M	Edge_1RB_Right	20.24	PC3	PASS
N25	15	20	DFT-QPSK	H	Outer_Full	20.00	PC3	PASS
N25	15	20	DFT-QPSK	H	Edge_1RB_Left	19.79	PC3	PASS
N25	15	20	DFT-QPSK	H	Inner_Full	19.96	PC3	PASS
N25	15	20	DFT-QPSK	H	Edge_1RB_Right	19.76	PC3	PASS
N25	15	20	CP-QPSK	H	Outer_Full	19.99	PC3	PASS
N25	15	20	CP-QPSK	H	Edge_1RB_Left	19.82	PC3	PASS
N25	15	20	CP-QPSK	H	Inner_Full	19.92	PC3	PASS
N25	15	20	CP-QPSK	H	Edge_1RB_Right	19.78	PC3	PASS

5G NR(P1):

Band	SCS	Bandwidth	Modulation	Channel	RB Config	Power (dBm)	Power Class	Verdict
N41	30	10	DFT-QPSK	L	Outer_Full	23.77	PC2	PASS
N41	30	10	DFT-QPSK	L	Edge_1RB_Left	21.41	PC2	PASS
N41	30	10	DFT-QPSK	L	Inner_Full	24.69	PC2	PASS

N41	30	10	DFT-QPSK	L	Edge_1RB_Right	21.13	PC2	PASS
N41	30	10	CP-QPSK	L	Outer_Full	21.75	PC2	PASS
N41	30	10	CP-QPSK	L	Edge_1RB_Left	21.50	PC2	PASS
N41	30	10	CP-QPSK	L	Inner_Full	23.39	PC2	PASS
N41	30	10	CP-QPSK	L	Edge_1RB_Right	21.17	PC2	PASS
N41	30	10	DFT-QPSK	M	Outer_Full	24.70	PC2	PASS
N41	30	10	DFT-QPSK	M	Edge_1RB_Left	22.21	PC2	PASS
N41	30	10	DFT-QPSK	M	Inner_Full	25.51	PC2	PASS
N41	30	10	DFT-QPSK	M	Edge_1RB_Right	22.20	PC2	PASS
N41	30	10	CP-QPSK	M	Outer_Full	22.72	PC2	PASS
N41	30	10	CP-QPSK	M	Edge_1RB_Left	22.47	PC2	PASS
N41	30	10	CP-QPSK	M	Inner_Full	24.37	PC2	PASS
N41	30	10	CP-QPSK	M	Edge_1RB_Right	22.48	PC2	PASS
N41	30	10	DFT-QPSK	H	Outer_Full	24.38	PC2	PASS
N41	30	10	DFT-QPSK	H	Edge_1RB_Left	21.96	PC2	PASS
N41	30	10	DFT-QPSK	H	Inner_Full	25.50	PC2	PASS
N41	30	10	DFT-QPSK	H	Edge_1RB_Right	21.86	PC2	PASS
N41	30	10	CP-QPSK	H	Outer_Full	22.62	PC2	PASS
N41	30	10	CP-QPSK	H	Edge_1RB_Left	22.28	PC2	PASS
N41	30	10	CP-QPSK	H	Inner_Full	23.99	PC2	PASS
N41	30	10	CP-QPSK	H	Edge_1RB_Right	22.14	PC2	PASS
N41	30	15	DFT-QPSK	L	Outer_Full	23.71	PC2	PASS
N41	30	15	DFT-QPSK	L	Edge_1RB_Left	21.29	PC2	PASS
N41	30	15	DFT-QPSK	L	Inner_Full	24.53	PC2	PASS
N41	30	15	DFT-QPSK	L	Edge_1RB_Right	20.96	PC2	PASS
N41	30	15	CP-QPSK	L	Outer_Full	21.76	PC2	PASS
N41	30	15	CP-QPSK	L	Edge_1RB_Left	21.33	PC2	PASS
N41	30	15	CP-QPSK	L	Inner_Full	23.11	PC2	PASS
N41	30	15	CP-QPSK	L	Edge_1RB_Right	21.09	PC2	PASS
N41	30	15	DFT-QPSK	M	Outer_Full	24.74	PC2	PASS
N41	30	15	DFT-QPSK	M	Edge_1RB_Left	21.86	PC2	PASS
N41	30	15	DFT-QPSK	M	Inner_Full	25.50	PC2	PASS
N41	30	15	DFT-QPSK	M	Edge_1RB_Right	22.04	PC2	PASS
N41	30	15	CP-QPSK	M	Outer_Full	22.76	PC2	PASS
N41	30	15	CP-QPSK	M	Edge_1RB_Left	22.02	PC2	PASS
N41	30	15	CP-QPSK	M	Inner_Full	24.13	PC2	PASS
N41	30	15	CP-QPSK	M	Edge_1RB_Right	22.13	PC2	PASS
N41	30	15	DFT-QPSK	H	Outer_Full	24.40	PC2	PASS
N41	30	15	DFT-QPSK	H	Edge_1RB_Left	21.77	PC2	PASS
N41	30	15	DFT-QPSK	H	Inner_Full	25.32	PC2	PASS
N41	30	15	DFT-QPSK	H	Edge_1RB_Right	21.76	PC2	PASS
N41	30	15	CP-QPSK	H	Outer_Full	22.57	PC2	PASS

N41	30	15	CP-QPSK	H	Edge_1RB_Left	21.84	PC2	PASS
N41	30	15	CP-QPSK	H	Inner_Full	23.90	PC2	PASS
N41	30	15	CP-QPSK	H	Edge_1RB_Right	21.82	PC2	PASS
N41	30	20	DFT-QPSK	L	Outer_Full	23.68	PC2	PASS
N41	30	20	DFT-QPSK	L	Edge_1RB_Left	21.33	PC2	PASS
N41	30	20	DFT-QPSK	L	Inner_Full	24.56	PC2	PASS
N41	30	20	DFT-QPSK	L	Edge_1RB_Right	21.08	PC2	PASS
N41	30	20	CP-QPSK	L	Outer_Full	21.67	PC2	PASS
N41	30	20	CP-QPSK	L	Edge_1RB_Left	21.57	PC2	PASS
N41	30	20	CP-QPSK	L	Inner_Full	23.12	PC2	PASS
N41	30	20	CP-QPSK	L	Edge_1RB_Right	21.35	PC2	PASS
N41	30	20	DFT-QPSK	M	Outer_Full	24.68	PC2	PASS
N41	30	20	DFT-QPSK	M	Edge_1RB_Left	21.77	PC2	PASS
N41	30	20	DFT-QPSK	M	Inner_Full	25.68	PC2	PASS
N41	30	20	DFT-QPSK	M	Edge_1RB_Right	22.05	PC2	PASS
N41	30	20	CP-QPSK	M	Outer_Full	22.67	PC2	PASS
N41	30	20	CP-QPSK	M	Edge_1RB_Left	22.06	PC2	PASS
N41	30	20	CP-QPSK	M	Inner_Full	24.06	PC2	PASS
N41	30	20	CP-QPSK	M	Edge_1RB_Right	22.25	PC2	PASS
N41	30	20	DFT-QPSK	H	Outer_Full	24.40	PC2	PASS
N41	30	20	DFT-QPSK	H	Edge_1RB_Left	21.79	PC2	PASS
N41	30	20	DFT-QPSK	H	Inner_Full	25.30	PC2	PASS
N41	30	20	DFT-QPSK	H	Edge_1RB_Right	21.90	PC2	PASS
N41	30	20	CP-QPSK	H	Outer_Full	22.49	PC2	PASS
N41	30	20	CP-QPSK	H	Edge_1RB_Left	21.98	PC2	PASS
N41	30	20	CP-QPSK	H	Inner_Full	23.89	PC2	PASS
N41	30	20	CP-QPSK	H	Edge_1RB_Right	21.98	PC2	PASS
N41	30	40	DFT-QPSK	L	Outer_Full	23.59	PC2	PASS
N41	30	40	DFT-QPSK	L	Edge_1RB_Left	20.83	PC2	PASS
N41	30	40	DFT-QPSK	L	Inner_Full	24.61	PC2	PASS
N41	30	40	DFT-QPSK	L	Edge_1RB_Right	20.70	PC2	PASS
N41	30	40	CP-QPSK	L	Outer_Full	21.55	PC2	PASS
N41	30	40	CP-QPSK	L	Edge_1RB_Left	21.33	PC2	PASS
N41	30	40	CP-QPSK	L	Inner_Full	23.17	PC2	PASS
N41	30	40	CP-QPSK	L	Edge_1RB_Right	20.96	PC2	PASS
N41	30	40	DFT-QPSK	M	Outer_Full	24.49	PC2	PASS
N41	30	40	DFT-QPSK	M	Edge_1RB_Left	21.33	PC2	PASS
N41	30	40	DFT-QPSK	M	Inner_Full	25.61	PC2	PASS
N41	30	40	DFT-QPSK	M	Edge_1RB_Right	21.75	PC2	PASS
N41	30	40	CP-QPSK	M	Outer_Full	22.51	PC2	PASS
N41	30	40	CP-QPSK	M	Edge_1RB_Left	21.45	PC2	PASS
N41	30	40	CP-QPSK	M	Inner_Full	24.07	PC2	PASS

N41	30	40	CP-QPSK	M	Edge_1RB_Right	21.93	PC2	PASS
N41	30	40	DFT-QPSK	H	Outer_Full	24.48	PC2	PASS
N41	30	40	DFT-QPSK	H	Edge_1RB_Left	22.03	PC2	PASS
N41	30	40	DFT-QPSK	H	Inner_Full	25.46	PC2	PASS
N41	30	40	DFT-QPSK	H	Edge_1RB_Right	21.52	PC2	PASS
N41	30	40	CP-QPSK	H	Outer_Full	22.51	PC2	PASS
N41	30	40	CP-QPSK	H	Edge_1RB_Left	22.36	PC2	PASS
N41	30	40	CP-QPSK	H	Inner_Full	23.90	PC2	PASS
N41	30	40	CP-QPSK	H	Edge_1RB_Right	21.78	PC2	PASS
N41	30	50	DFT-QPSK	L	Outer_Full	23.61	PC2	PASS
N41	30	50	DFT-QPSK	L	Edge_1RB_Left	21.13	PC2	PASS
N41	30	50	DFT-QPSK	L	Inner_Full	24.66	PC2	PASS
N41	30	50	DFT-QPSK	L	Edge_1RB_Right	21.03	PC2	PASS
N41	30	50	CP-QPSK	L	Outer_Full	21.67	PC2	PASS
N41	30	50	CP-QPSK	L	Edge_1RB_Left	21.30	PC2	PASS
N41	30	50	CP-QPSK	L	Inner_Full	23.28	PC2	PASS
N41	30	50	CP-QPSK	L	Edge_1RB_Right	21.25	PC2	PASS
N41	30	50	DFT-QPSK	M	Outer_Full	24.50	PC2	PASS
N41	30	50	DFT-QPSK	M	Edge_1RB_Left	21.25	PC2	PASS
N41	30	50	DFT-QPSK	M	Inner_Full	25.59	PC2	PASS
N41	30	50	DFT-QPSK	M	Edge_1RB_Right	22.08	PC2	PASS
N41	30	50	CP-QPSK	M	Outer_Full	22.56	PC2	PASS
N41	30	50	CP-QPSK	M	Edge_1RB_Left	21.73	PC2	PASS
N41	30	50	CP-QPSK	M	Inner_Full	24.19	PC2	PASS
N41	30	50	CP-QPSK	M	Edge_1RB_Right	22.25	PC2	PASS
N41	30	50	DFT-QPSK	H	Outer_Full	24.60	PC2	PASS
N41	30	50	DFT-QPSK	H	Edge_1RB_Left	22.23	PC2	PASS
N41	30	50	DFT-QPSK	H	Inner_Full	25.62	PC2	PASS
N41	30	50	DFT-QPSK	H	Edge_1RB_Right	21.68	PC2	PASS
N41	30	50	CP-QPSK	H	Outer_Full	22.74	PC2	PASS
N41	30	50	CP-QPSK	H	Edge_1RB_Left	22.31	PC2	PASS
N41	30	50	CP-QPSK	H	Inner_Full	24.06	PC2	PASS
N41	30	50	CP-QPSK	H	Edge_1RB_Right	21.89	PC2	PASS
N41	30	60	DFT-QPSK	L	Outer_Full	23.62	PC2	PASS
N41	30	60	DFT-QPSK	L	Edge_1RB_Left	21.07	PC2	PASS
N41	30	60	DFT-QPSK	L	Inner_Full	24.65	PC2	PASS
N41	30	60	DFT-QPSK	L	Edge_1RB_Right	21.24	PC2	PASS
N41	30	60	CP-QPSK	L	Outer_Full	21.58	PC2	PASS
N41	30	60	CP-QPSK	L	Edge_1RB_Left	21.16	PC2	PASS
N41	30	60	CP-QPSK	L	Inner_Full	23.15	PC2	PASS
N41	30	60	CP-QPSK	L	Edge_1RB_Right	21.58	PC2	PASS
N41	30	60	DFT-QPSK	M	Outer_Full	24.44	PC2	PASS

N41	30	60	DFT-QPSK	M	Edge_1RB_Left	21.35	PC2	PASS
N41	30	60	DFT-QPSK	M	Inner_Full	25.56	PC2	PASS
N41	30	60	DFT-QPSK	M	Edge_1RB_Right	22.04	PC2	PASS
N41	30	60	CP-QPSK	M	Outer_Full	22.45	PC2	PASS
N41	30	60	CP-QPSK	M	Edge_1RB_Left	21.82	PC2	PASS
N41	30	60	CP-QPSK	M	Inner_Full	24.05	PC2	PASS
N41	30	60	CP-QPSK	M	Edge_1RB_Right	22.65	PC2	PASS
N41	30	60	DFT-QPSK	H	Outer_Full	24.62	PC2	PASS
N41	30	60	DFT-QPSK	H	Edge_1RB_Left	22.11	PC2	PASS
N41	30	60	DFT-QPSK	H	Inner_Full	25.68	PC2	PASS
N41	30	60	DFT-QPSK	H	Edge_1RB_Right	21.57	PC2	PASS
N41	30	60	CP-QPSK	H	Outer_Full	22.66	PC2	PASS
N41	30	60	CP-QPSK	H	Edge_1RB_Left	22.25	PC2	PASS
N41	30	60	CP-QPSK	H	Inner_Full	24.14	PC2	PASS
N41	30	60	CP-QPSK	H	Edge_1RB_Right	21.80	PC2	PASS
N41	30	80	DFT-QPSK	L	Outer_Full	23.71	PC2	PASS
N41	30	80	DFT-QPSK	L	Edge_1RB_Left	20.88	PC2	PASS
N41	30	80	DFT-QPSK	L	Inner_Full	24.59	PC2	PASS
N41	30	80	DFT-QPSK	L	Edge_1RB_Right	21.16	PC2	PASS
N41	30	80	CP-QPSK	L	Outer_Full	21.68	PC2	PASS
N41	30	80	CP-QPSK	L	Edge_1RB_Left	21.31	PC2	PASS
N41	30	80	CP-QPSK	L	Inner_Full	23.27	PC2	PASS
N41	30	80	CP-QPSK	L	Edge_1RB_Right	21.59	PC2	PASS
N41	30	80	DFT-QPSK	M	Outer_Full	24.38	PC2	PASS
N41	30	80	DFT-QPSK	M	Edge_1RB_Left	21.06	PC2	PASS
N41	30	80	DFT-QPSK	M	Inner_Full	25.44	PC2	PASS
N41	30	80	DFT-QPSK	M	Edge_1RB_Right	21.90	PC2	PASS
N41	30	80	CP-QPSK	M	Outer_Full	22.42	PC2	PASS
N41	30	80	CP-QPSK	M	Edge_1RB_Left	21.30	PC2	PASS
N41	30	80	CP-QPSK	M	Inner_Full	24.04	PC2	PASS
N41	30	80	CP-QPSK	M	Edge_1RB_Right	22.11	PC2	PASS
N41	30	80	DFT-QPSK	H	Outer_Full	24.52	PC2	PASS
N41	30	80	DFT-QPSK	H	Edge_1RB_Left	21.69	PC2	PASS
N41	30	80	DFT-QPSK	H	Inner_Full	25.65	PC2	PASS
N41	30	80	DFT-QPSK	H	Edge_1RB_Right	21.37	PC2	PASS
N41	30	80	CP-QPSK	H	Outer_Full	22.62	PC2	PASS
N41	30	80	CP-QPSK	H	Edge_1RB_Left	21.83	PC2	PASS
N41	30	80	CP-QPSK	H	Inner_Full	24.19	PC2	PASS
N41	30	80	CP-QPSK	H	Edge_1RB_Right	21.66	PC2	PASS
N41	30	90	DFT-QPSK	L	Outer_Full	23.77	PC2	PASS
N41	30	90	DFT-QPSK	L	Edge_1RB_Left	20.58	PC2	PASS
N41	30	90	DFT-QPSK	L	Inner_Full	24.59	PC2	PASS

N41	30	90	DFT-QPSK	L	Edge_1RB_Right	21.26	PC2	PASS
N41	30	90	CP-QPSK	L	Outer_Full	21.74	PC2	PASS
N41	30	90	CP-QPSK	L	Edge_1RB_Left	20.76	PC2	PASS
N41	30	90	CP-QPSK	L	Inner_Full	23.22	PC2	PASS
N41	30	90	CP-QPSK	L	Edge_1RB_Right	21.37	PC2	PASS
N41	30	90	DFT-QPSK	M	Outer_Full	24.44	PC2	PASS
N41	30	90	DFT-QPSK	M	Edge_1RB_Left	20.49	PC2	PASS
N41	30	90	DFT-QPSK	M	Inner_Full	25.35	PC2	PASS
N41	30	90	DFT-QPSK	M	Edge_1RB_Right	21.61	PC2	PASS
N41	30	90	CP-QPSK	M	Outer_Full	22.37	PC2	PASS
N41	30	90	CP-QPSK	M	Edge_1RB_Left	20.74	PC2	PASS
N41	30	90	CP-QPSK	M	Inner_Full	23.97	PC2	PASS
N41	30	90	CP-QPSK	M	Edge_1RB_Right	21.71	PC2	PASS
N41	30	90	DFT-QPSK	H	Outer_Full	24.50	PC2	PASS
N41	30	90	DFT-QPSK	H	Edge_1RB_Left	21.37	PC2	PASS
N41	30	90	DFT-QPSK	H	Inner_Full	25.73	PC2	PASS
N41	30	90	DFT-QPSK	H	Edge_1RB_Right	21.23	PC2	PASS
N41	30	90	CP-QPSK	H	Outer_Full	22.63	PC2	PASS
N41	30	90	CP-QPSK	H	Edge_1RB_Left	21.51	PC2	PASS
N41	30	90	CP-QPSK	H	Inner_Full	24.15	PC2	PASS
N41	30	90	CP-QPSK	H	Edge_1RB_Right	21.43	PC2	PASS
N41	30	100	DFT-QPSK	L	Outer_Full	23.79	PC2	PASS
N41	30	100	DFT-QPSK	L	Edge_1RB_Left	20.53	PC2	PASS
N41	30	100	DFT-QPSK	L	Inner_Full	24.68	PC2	PASS
N41	30	100	DFT-QPSK	L	Edge_1RB_Right	21.41	PC2	PASS
N41	30	100	CP-QPSK	L	Outer_Full	21.77	PC2	PASS
N41	30	100	CP-QPSK	L	Edge_1RB_Left	20.66	PC2	PASS
N41	30	100	CP-QPSK	L	Inner_Full	23.30	PC2	PASS
N41	30	100	CP-QPSK	L	Edge_1RB_Right	21.47	PC2	PASS
N41	30	100	DFT-QPSK	M	Outer_Full	24.31	PC2	PASS
N41	30	100	DFT-QPSK	M	Edge_1RB_Left	20.27	PC2	PASS
N41	30	100	DFT-QPSK	M	Inner_Full	25.31	PC2	PASS
N41	30	100	DFT-QPSK	M	Edge_1RB_Right	21.48	PC2	PASS
N41	30	100	CP-QPSK	M	Outer_Full	22.32	PC2	PASS
N41	30	100	CP-QPSK	M	Edge_1RB_Left	20.53	PC2	PASS
N41	30	100	CP-QPSK	M	Inner_Full	23.99	PC2	PASS
N41	30	100	CP-QPSK	M	Edge_1RB_Right	21.49	PC2	PASS
N41	30	100	DFT-QPSK	H	Outer_Full	24.42	PC2	PASS
N41	30	100	DFT-QPSK	H	Edge_1RB_Left	21.30	PC2	PASS
N41	30	100	DFT-QPSK	H	Inner_Full	25.74	PC2	PASS
N41	30	100	DFT-QPSK	H	Edge_1RB_Right	21.13	PC2	PASS
N41	30	100	CP-QPSK	H	Outer_Full	22.59	PC2	PASS

N41	30	100	CP-QPSK	H	Edge_1RB_Left	21.58	PC2	PASS
N41	30	100	CP-QPSK	H	Inner_Full	24.21	PC2	PASS
N41	30	100	CP-QPSK	H	Edge_1RB_Right	21.11	PC2	PASS

5G NR(P4):

Band	SCS	Bandwidth	Modulation	Channel	RB Config	Power (dBm)	Power Class	Verdict
N41	30	10	DFT-QPSK	L	Outer_Full	18.62	PC2	PASS
N41	30	10	DFT-QPSK	L	Edge_1RB_Left	18.68	PC2	PASS
N41	30	10	DFT-QPSK	L	Inner_Full	18.65	PC2	PASS
N41	30	10	DFT-QPSK	L	Edge_1RB_Right	19.18	PC2	PASS
N41	30	10	CP-QPSK	L	Outer_Full	19.06	PC2	PASS
N41	30	10	CP-QPSK	L	Edge_1RB_Left	18.62	PC2	PASS
N41	30	10	CP-QPSK	L	Inner_Full	18.64	PC2	PASS
N41	30	10	CP-QPSK	L	Edge_1RB_Right	18.27	PC2	PASS
N41	30	10	DFT-QPSK	M	Outer_Full	19.67	PC2	PASS
N41	30	10	DFT-QPSK	M	Edge_1RB_Left	19.51	PC2	PASS
N41	30	10	DFT-QPSK	M	Inner_Full	19.77	PC2	PASS
N41	30	10	DFT-QPSK	M	Edge_1RB_Right	19.49	PC2	PASS
N41	30	10	CP-QPSK	M	Outer_Full	19.69	PC2	PASS
N41	30	10	CP-QPSK	M	Edge_1RB_Left	19.58	PC2	PASS
N41	30	10	CP-QPSK	M	Inner_Full	19.60	PC2	PASS
N41	30	10	CP-QPSK	M	Edge_1RB_Right	19.43	PC2	PASS
N41	30	10	DFT-QPSK	H	Outer_Full	18.65	PC2	PASS
N41	30	10	DFT-QPSK	H	Edge_1RB_Left	18.66	PC2	PASS
N41	30	10	DFT-QPSK	H	Inner_Full	18.64	PC2	PASS
N41	30	10	DFT-QPSK	H	Edge_1RB_Right	18.49	PC2	PASS
N41	30	10	CP-QPSK	H	Outer_Full	18.57	PC2	PASS
N41	30	10	CP-QPSK	H	Edge_1RB_Left	18.94	PC2	PASS
N41	30	10	CP-QPSK	H	Inner_Full	18.63	PC2	PASS
N41	30	10	CP-QPSK	H	Edge_1RB_Right	18.47	PC2	PASS
N41	30	15	DFT-QPSK	L	Outer_Full	19.52	PC2	PASS
N41	30	15	DFT-QPSK	L	Edge_1RB_Left	19.16	PC2	PASS
N41	30	15	DFT-QPSK	L	Inner_Full	19.55	PC2	PASS
N41	30	15	DFT-QPSK	L	Edge_1RB_Right	19.28	PC2	PASS
N41	30	15	CP-QPSK	L	Outer_Full	19.54	PC2	PASS
N41	30	15	CP-QPSK	L	Edge_1RB_Left	19.46	PC2	PASS
N41	30	15	CP-QPSK	L	Inner_Full	19.66	PC2	PASS
N41	30	15	CP-QPSK	L	Edge_1RB_Right	19.84	PC2	PASS
N41	30	15	DFT-QPSK	M	Outer_Full	19.59	PC2	PASS
N41	30	15	DFT-QPSK	M	Edge_1RB_Left	19.41	PC2	PASS

N41	30	15	DFT-QPSK	M	Inner_Full	19.64	PC2	PASS
N41	30	15	DFT-QPSK	M	Edge_1RB_Right	19.36	PC2	PASS
N41	30	15	CP-QPSK	M	Outer_Full	19.52	PC2	PASS
N41	30	15	CP-QPSK	M	Edge_1RB_Left	19.86	PC2	PASS
N41	30	15	CP-QPSK	M	Inner_Full	19.61	PC2	PASS
N41	30	15	CP-QPSK	M	Edge_1RB_Right	19.81	PC2	PASS
N41	30	15	DFT-QPSK	H	Outer_Full	18.62	PC2	PASS
N41	30	15	DFT-QPSK	H	Edge_1RB_Left	18.65	PC2	PASS
N41	30	15	DFT-QPSK	H	Inner_Full	18.63	PC2	PASS
N41	30	15	DFT-QPSK	H	Edge_1RB_Right	18.51	PC2	PASS
N41	30	15	CP-QPSK	H	Outer_Full	18.54	PC2	PASS
N41	30	15	CP-QPSK	H	Edge_1RB_Left	18.74	PC2	PASS
N41	30	15	CP-QPSK	H	Inner_Full	18.55	PC2	PASS
N41	30	15	CP-QPSK	H	Edge_1RB_Right	18.51	PC2	PASS
N41	30	20	DFT-QPSK	L	Outer_Full	19.50	PC2	PASS
N41	30	20	DFT-QPSK	L	Edge_1RB_Left	19.20	PC2	PASS
N41	30	20	DFT-QPSK	L	Inner_Full	19.54	PC2	PASS
N41	30	20	DFT-QPSK	L	Edge_1RB_Right	19.42	PC2	PASS
N41	30	20	CP-QPSK	L	Outer_Full	19.48	PC2	PASS
N41	30	20	CP-QPSK	L	Edge_1RB_Left	19.13	PC2	PASS
N41	30	20	CP-QPSK	L	Inner_Full	19.52	PC2	PASS
N41	30	20	CP-QPSK	L	Edge_1RB_Right	19.43	PC2	PASS
N41	30	20	DFT-QPSK	M	Outer_Full	19.49	PC2	PASS
N41	30	20	DFT-QPSK	M	Edge_1RB_Left	19.33	PC2	PASS
N41	30	20	DFT-QPSK	M	Inner_Full	19.59	PC2	PASS
N41	30	20	DFT-QPSK	M	Edge_1RB_Right	19.39	PC2	PASS
N41	30	20	CP-QPSK	M	Outer_Full	19.47	PC2	PASS
N41	30	20	CP-QPSK	M	Edge_1RB_Left	19.67	PC2	PASS
N41	30	20	CP-QPSK	M	Inner_Full	19.51	PC2	PASS
N41	30	20	CP-QPSK	M	Edge_1RB_Right	19.77	PC2	PASS
N41	30	20	DFT-QPSK	H	Outer_Full	19.49	PC2	PASS
N41	30	20	DFT-QPSK	H	Edge_1RB_Left	19.69	PC2	PASS
N41	30	20	DFT-QPSK	H	Inner_Full	19.58	PC2	PASS
N41	30	20	DFT-QPSK	H	Edge_1RB_Right	19.60	PC2	PASS
N41	30	20	CP-QPSK	H	Outer_Full	19.43	PC2	PASS
N41	30	20	CP-QPSK	H	Edge_1RB_Left	18.65	PC2	PASS
N41	30	20	CP-QPSK	H	Inner_Full	18.66	PC2	PASS
N41	30	20	CP-QPSK	H	Edge_1RB_Right	18.64	PC2	PASS
N41	30	40	DFT-QPSK	L	Outer_Full	18.46	PC2	PASS
N41	30	40	DFT-QPSK	L	Edge_1RB_Left	18.25	PC2	PASS
N41	30	40	DFT-QPSK	L	Inner_Full	18.60	PC2	PASS
N41	30	40	DFT-QPSK	L	Edge_1RB_Right	17.91	PC2	PASS

N41	30	40	CP-QPSK	L	Outer_Full	18.41	PC2	PASS
N41	30	40	CP-QPSK	L	Edge_1RB_Left	18.04	PC2	PASS
N41	30	40	CP-QPSK	L	Inner_Full	18.56	PC2	PASS
N41	30	40	CP-QPSK	L	Edge_1RB_Right	17.74	PC2	PASS
N41	30	40	DFT-QPSK	M	Outer_Full	19.23	PC2	PASS
N41	30	40	DFT-QPSK	M	Edge_1RB_Left	18.29	PC2	PASS
N41	30	40	DFT-QPSK	M	Inner_Full	19.42	PC2	PASS
N41	30	40	DFT-QPSK	M	Edge_1RB_Right	18.85	PC2	PASS
N41	30	40	CP-QPSK	M	Outer_Full	19.19	PC2	PASS
N41	30	40	CP-QPSK	M	Edge_1RB_Left	18.17	PC2	PASS
N41	30	40	CP-QPSK	M	Inner_Full	19.38	PC2	PASS
N41	30	40	CP-QPSK	M	Edge_1RB_Right	18.80	PC2	PASS
N41	30	40	DFT-QPSK	H	Outer_Full	19.54	PC2	PASS
N41	30	40	DFT-QPSK	H	Edge_1RB_Left	19.27	PC2	PASS
N41	30	40	DFT-QPSK	H	Inner_Full	19.60	PC2	PASS
N41	30	40	DFT-QPSK	H	Edge_1RB_Right	19.00	PC2	PASS
N41	30	40	CP-QPSK	H	Outer_Full	19.45	PC2	PASS
N41	30	40	CP-QPSK	H	Edge_1RB_Left	19.15	PC2	PASS
N41	30	40	CP-QPSK	H	Inner_Full	19.54	PC2	PASS
N41	30	40	CP-QPSK	H	Edge_1RB_Right	18.74	PC2	PASS
N41	30	50	DFT-QPSK	L	Outer_Full	18.57	PC2	PASS
N41	30	50	DFT-QPSK	L	Edge_1RB_Left	18.46	PC2	PASS
N41	30	50	DFT-QPSK	L	Inner_Full	18.66	PC2	PASS
N41	30	50	DFT-QPSK	L	Edge_1RB_Right	18.17	PC2	PASS
N41	30	50	CP-QPSK	L	Outer_Full	18.49	PC2	PASS
N41	30	50	CP-QPSK	L	Edge_1RB_Left	18.33	PC2	PASS
N41	30	50	CP-QPSK	L	Inner_Full	18.60	PC2	PASS
N41	30	50	CP-QPSK	L	Edge_1RB_Right	18.18	PC2	PASS
N41	30	50	DFT-QPSK	M	Outer_Full	19.25	PC2	PASS
N41	30	50	DFT-QPSK	M	Edge_1RB_Left	18.63	PC2	PASS
N41	30	50	DFT-QPSK	M	Inner_Full	19.37	PC2	PASS
N41	30	50	DFT-QPSK	M	Edge_1RB_Right	19.43	PC2	PASS
N41	30	50	CP-QPSK	M	Outer_Full	19.26	PC2	PASS
N41	30	50	CP-QPSK	M	Edge_1RB_Left	18.39	PC2	PASS
N41	30	50	CP-QPSK	M	Inner_Full	19.39	PC2	PASS
N41	30	50	CP-QPSK	M	Edge_1RB_Right	19.18	PC2	PASS
N41	30	50	DFT-QPSK	H	Outer_Full	19.66	PC2	PASS
N41	30	50	DFT-QPSK	H	Edge_1RB_Left	19.43	PC2	PASS
N41	30	50	DFT-QPSK	H	Inner_Full	19.73	PC2	PASS
N41	30	50	DFT-QPSK	H	Edge_1RB_Right	19.19	PC2	PASS
N41	30	50	CP-QPSK	H	Outer_Full	19.59	PC2	PASS
N41	30	50	CP-QPSK	H	Edge_1RB_Left	19.53	PC2	PASS

N41	30	50	CP-QPSK	H	Inner_Full	19.66	PC2	PASS
N41	30	50	CP-QPSK	H	Edge_1RB_Right	19.23	PC2	PASS
N41	30	60	DFT-QPSK	L	Outer_Full	18.52	PC2	PASS
N41	30	60	DFT-QPSK	L	Edge_1RB_Left	18.26	PC2	PASS
N41	30	60	DFT-QPSK	L	Inner_Full	18.59	PC2	PASS
N41	30	60	DFT-QPSK	L	Edge_1RB_Right	18.41	PC2	PASS
N41	30	60	CP-QPSK	L	Outer_Full	18.36	PC2	PASS
N41	30	60	CP-QPSK	L	Edge_1RB_Left	18.35	PC2	PASS
N41	30	60	CP-QPSK	L	Inner_Full	18.54	PC2	PASS
N41	30	60	CP-QPSK	L	Edge_1RB_Right	18.50	PC2	PASS
N41	30	60	DFT-QPSK	M	Outer_Full	19.25	PC2	PASS
N41	30	60	DFT-QPSK	M	Edge_1RB_Left	18.52	PC2	PASS
N41	30	60	DFT-QPSK	M	Inner_Full	19.40	PC2	PASS
N41	30	60	DFT-QPSK	M	Edge_1RB_Right	19.41	PC2	PASS
N41	30	60	CP-QPSK	M	Outer_Full	19.17	PC2	PASS
N41	30	60	CP-QPSK	M	Edge_1RB_Left	18.46	PC2	PASS
N41	30	60	CP-QPSK	M	Inner_Full	19.29	PC2	PASS
N41	30	60	CP-QPSK	M	Edge_1RB_Right	19.39	PC2	PASS
N41	30	60	DFT-QPSK	H	Outer_Full	19.62	PC2	PASS
N41	30	60	DFT-QPSK	H	Edge_1RB_Left	19.43	PC2	PASS
N41	30	60	DFT-QPSK	H	Inner_Full	19.74	PC2	PASS
N41	30	60	DFT-QPSK	H	Edge_1RB_Right	19.05	PC2	PASS
N41	30	60	CP-QPSK	H	Outer_Full	19.54	PC2	PASS
N41	30	60	CP-QPSK	H	Edge_1RB_Left	19.42	PC2	PASS
N41	30	60	CP-QPSK	H	Inner_Full	19.71	PC2	PASS
N41	30	60	CP-QPSK	H	Edge_1RB_Right	19.04	PC2	PASS
N41	30	80	DFT-QPSK	L	Outer_Full	18.61	PC2	PASS
N41	30	80	DFT-QPSK	L	Edge_1RB_Left	18.24	PC2	PASS
N41	30	80	DFT-QPSK	L	Inner_Full	18.70	PC2	PASS
N41	30	80	DFT-QPSK	L	Edge_1RB_Right	18.40	PC2	PASS
N41	30	80	CP-QPSK	L	Outer_Full	18.59	PC2	PASS
N41	30	80	CP-QPSK	L	Edge_1RB_Left	18.21	PC2	PASS
N41	30	80	CP-QPSK	L	Inner_Full	18.62	PC2	PASS
N41	30	80	CP-QPSK	L	Edge_1RB_Right	18.34	PC2	PASS
N41	30	80	DFT-QPSK	M	Outer_Full	19.30	PC2	PASS
N41	30	80	DFT-QPSK	M	Edge_1RB_Left	18.29	PC2	PASS
N41	30	80	DFT-QPSK	M	Inner_Full	19.40	PC2	PASS
N41	30	80	DFT-QPSK	M	Edge_1RB_Right	19.24	PC2	PASS
N41	30	80	CP-QPSK	M	Outer_Full	19.22	PC2	PASS
N41	30	80	CP-QPSK	M	Edge_1RB_Left	18.11	PC2	PASS
N41	30	80	CP-QPSK	M	Inner_Full	19.36	PC2	PASS
N41	30	80	CP-QPSK	M	Edge_1RB_Right	19.06	PC2	PASS

N41	30	80	DFT-QPSK	H	Outer_Full	19.70	PC2	PASS
N41	30	80	DFT-QPSK	H	Edge_1RB_Left	18.91	PC2	PASS
N41	30	80	DFT-QPSK	H	Inner_Full	19.87	PC2	PASS
N41	30	80	DFT-QPSK	H	Edge_1RB_Right	19.02	PC2	PASS
N41	30	80	CP-QPSK	H	Outer_Full	19.65	PC2	PASS
N41	30	80	CP-QPSK	H	Edge_1RB_Left	18.92	PC2	PASS
N41	30	80	CP-QPSK	H	Inner_Full	19.81	PC2	PASS
N41	30	80	CP-QPSK	H	Edge_1RB_Right	18.92	PC2	PASS
N41	30	90	DFT-QPSK	L	Outer_Full	18.70	PC2	PASS
N41	30	90	DFT-QPSK	L	Edge_1RB_Left	18.63	PC2	PASS
N41	30	90	DFT-QPSK	L	Inner_Full	17.94	PC2	PASS
N41	30	90	DFT-QPSK	L	Edge_1RB_Right	18.70	PC2	PASS
N41	30	90	CP-QPSK	L	Outer_Full	18.42	PC2	PASS
N41	30	90	CP-QPSK	L	Edge_1RB_Left	18.62	PC2	PASS
N41	30	90	CP-QPSK	L	Inner_Full	18.21	PC2	PASS
N41	30	90	CP-QPSK	L	Edge_1RB_Right	18.69	PC2	PASS
N41	30	90	DFT-QPSK	M	Outer_Full	18.96	PC2	PASS
N41	30	90	DFT-QPSK	M	Edge_1RB_Left	18.35	PC2	PASS
N41	30	90	DFT-QPSK	M	Inner_Full	19.16	PC2	PASS
N41	30	90	DFT-QPSK	M	Edge_1RB_Right	19.32	PC2	PASS
N41	30	90	CP-QPSK	M	Outer_Full	20.14	PC2	PASS
N41	30	90	CP-QPSK	M	Edge_1RB_Left	19.70	PC2	PASS
N41	30	90	CP-QPSK	M	Inner_Full	19.77	PC2	PASS
N41	30	90	CP-QPSK	M	Edge_1RB_Right	18.87	PC2	PASS
N41	30	90	DFT-QPSK	H	Outer_Full	19.39	PC2	PASS
N41	30	90	DFT-QPSK	H	Edge_1RB_Left	19.32	PC2	PASS
N41	30	90	DFT-QPSK	H	Inner_Full	19.67	PC2	PASS
N41	30	90	DFT-QPSK	H	Edge_1RB_Right	20.40	PC2	PASS
N41	30	90	CP-QPSK	H	Outer_Full	19.53	PC2	PASS
N41	30	90	CP-QPSK	H	Edge_1RB_Left	19.50	PC2	PASS
N41	30	90	CP-QPSK	H	Inner_Full	19.02	PC2	PASS
N41	30	90	CP-QPSK	H	Edge_1RB_Right	20.59	PC2	PASS
N41	30	100	DFT-QPSK	L	Outer_Full	20.88	PC2	PASS
N41	30	100	DFT-QPSK	L	Edge_1RB_Left	20.40	PC2	PASS
N41	30	100	DFT-QPSK	L	Inner_Full	19.23	PC2	PASS
N41	30	100	DFT-QPSK	L	Edge_1RB_Right	19.10	PC2	PASS
N41	30	100	CP-QPSK	L	Outer_Full	18.44	PC2	PASS
N41	30	100	CP-QPSK	L	Edge_1RB_Left	19.30	PC2	PASS
N41	30	100	CP-QPSK	L	Inner_Full	18.50	PC2	PASS
N41	30	100	CP-QPSK	L	Edge_1RB_Right	18.99	PC2	PASS
N41	30	100	DFT-QPSK	M	Outer_Full	18.89	PC2	PASS
N41	30	100	DFT-QPSK	M	Edge_1RB_Left	17.94	PC2	PASS

N41	30	100	DFT-QPSK	M	Inner_Full	19.12	PC2	PASS
N41	30	100	DFT-QPSK	M	Edge_1RB_Right	19.42	PC2	PASS
N41	30	100	CP-QPSK	M	Outer_Full	18.92	PC2	PASS
N41	30	100	CP-QPSK	M	Edge_1RB_Left	19.81	PC2	PASS
N41	30	100	CP-QPSK	M	Inner_Full	18.92	PC2	PASS
N41	30	100	CP-QPSK	M	Edge_1RB_Right	18.95	PC2	PASS
N41	30	100	DFT-QPSK	H	Outer_Full	18.35	PC2	PASS
N41	30	100	DFT-QPSK	H	Edge_1RB_Left	17.94	PC2	PASS
N41	30	100	DFT-QPSK	H	Inner_Full	19.02	PC2	PASS
N41	30	100	DFT-QPSK	H	Edge_1RB_Right	19.65	PC2	PASS
N41	30	100	CP-QPSK	H	Outer_Full	18.92	PC2	PASS
N41	30	100	CP-QPSK	H	Edge_1RB_Left	19.58	PC2	PASS
N41	30	100	CP-QPSK	H	Inner_Full	18.84	PC2	PASS
N41	30	100	CP-QPSK	H	Edge_1RB_Right	18.57	PC2	PASS

5G NR(P3): Hotspot ON

Band	SCS	Bandwidth	Modulation	Channel	RB Config	Power (dBm)	Power Class	Verdict
N41	30	10	DFT-QPSK	L	Outer_Full	18.27	PC2	PASS
N41	30	10	DFT-QPSK	L	Edge_1RB_Left	18.63	PC2	PASS
N41	30	10	DFT-QPSK	L	Inner_Full	18.58	PC2	PASS
N41	30	10	DFT-QPSK	L	Edge_1RB_Right	18.59	PC2	PASS
N41	30	10	CP-QPSK	L	Outer_Full	18.50	PC2	PASS
N41	30	10	CP-QPSK	L	Edge_1RB_Left	18.98	PC2	PASS
N41	30	10	CP-QPSK	L	Inner_Full	18.39	PC2	PASS
N41	30	10	CP-QPSK	L	Edge_1RB_Right	18.66	PC2	PASS
N41	30	10	DFT-QPSK	M	Outer_Full	19.33	PC2	PASS
N41	30	10	DFT-QPSK	M	Edge_1RB_Left	19.18	PC2	PASS
N41	30	10	DFT-QPSK	M	Inner_Full	19.33	PC2	PASS
N41	30	10	DFT-QPSK	M	Edge_1RB_Right	19.23	PC2	PASS
N41	30	10	CP-QPSK	M	Outer_Full	19.30	PC2	PASS
N41	30	10	CP-QPSK	M	Edge_1RB_Left	19.59	PC2	PASS
N41	30	10	CP-QPSK	M	Inner_Full	19.26	PC2	PASS
N41	30	10	CP-QPSK	M	Edge_1RB_Right	19.63	PC2	PASS
N41	30	10	DFT-QPSK	H	Outer_Full	19.42	PC2	PASS
N41	30	10	DFT-QPSK	H	Edge_1RB_Left	19.29	PC2	PASS
N41	30	10	DFT-QPSK	H	Inner_Full	19.50	PC2	PASS
N41	30	10	DFT-QPSK	H	Edge_1RB_Right	19.28	PC2	PASS
N41	30	10	CP-QPSK	H	Outer_Full	19.41	PC2	PASS
N41	30	10	CP-QPSK	H	Edge_1RB_Left	19.67	PC2	PASS
N41	30	10	CP-QPSK	H	Inner_Full	19.37	PC2	PASS

N41	30	10	CP-QPSK	H	Edge_1RB_Right	19.74	PC2	PASS
N41	30	15	DFT-QPSK	L	Outer_Full	18.41	PC2	PASS
N41	30	15	DFT-QPSK	L	Edge_1RB_Left	18.41	PC2	PASS
N41	30	15	DFT-QPSK	L	Inner_Full	18.41	PC2	PASS
N41	30	15	DFT-QPSK	L	Edge_1RB_Right	18.14	PC2	PASS
N41	30	15	CP-QPSK	L	Outer_Full	18.37	PC2	PASS
N41	30	15	CP-QPSK	L	Edge_1RB_Left	18.72	PC2	PASS
N41	30	15	CP-QPSK	L	Inner_Full	18.40	PC2	PASS
N41	30	15	CP-QPSK	L	Edge_1RB_Right	18.47	PC2	PASS
N41	30	15	DFT-QPSK	M	Outer_Full	19.29	PC2	PASS
N41	30	15	DFT-QPSK	M	Edge_1RB_Left	19.06	PC2	PASS
N41	30	15	DFT-QPSK	M	Inner_Full	19.34	PC2	PASS
N41	30	15	DFT-QPSK	M	Edge_1RB_Right	19.19	PC2	PASS
N41	30	15	CP-QPSK	M	Outer_Full	19.28	PC2	PASS
N41	30	15	CP-QPSK	M	Edge_1RB_Left	19.23	PC2	PASS
N41	30	15	CP-QPSK	M	Inner_Full	19.28	PC2	PASS
N41	30	15	CP-QPSK	M	Edge_1RB_Right	19.43	PC2	PASS
N41	30	15	DFT-QPSK	H	Outer_Full	19.40	PC2	PASS
N41	30	15	DFT-QPSK	H	Edge_1RB_Left	19.30	PC2	PASS
N41	30	15	DFT-QPSK	H	Inner_Full	19.39	PC2	PASS
N41	30	15	DFT-QPSK	H	Edge_1RB_Right	19.23	PC2	PASS
N41	30	15	CP-QPSK	H	Outer_Full	19.44	PC2	PASS
N41	30	15	CP-QPSK	H	Edge_1RB_Left	19.65	PC2	PASS
N41	30	15	CP-QPSK	H	Inner_Full	19.42	PC2	PASS
N41	30	15	CP-QPSK	H	Edge_1RB_Right	19.60	PC2	PASS
N41	30	20	DFT-QPSK	L	Outer_Full	18.35	PC2	PASS
N41	30	20	DFT-QPSK	L	Edge_1RB_Left	18.49	PC2	PASS
N41	30	20	DFT-QPSK	L	Inner_Full	18.43	PC2	PASS
N41	30	20	DFT-QPSK	L	Edge_1RB_Right	18.28	PC2	PASS
N41	30	20	CP-QPSK	L	Outer_Full	18.36	PC2	PASS
N41	30	20	CP-QPSK	L	Edge_1RB_Left	18.65	PC2	PASS
N41	30	20	CP-QPSK	L	Inner_Full	18.40	PC2	PASS
N41	30	20	CP-QPSK	L	Edge_1RB_Right	18.43	PC2	PASS
N41	30	20	DFT-QPSK	M	Outer_Full	19.28	PC2	PASS
N41	30	20	DFT-QPSK	M	Edge_1RB_Left	18.99	PC2	PASS
N41	30	20	DFT-QPSK	M	Inner_Full	19.39	PC2	PASS
N41	30	20	DFT-QPSK	M	Edge_1RB_Right	19.26	PC2	PASS
N41	30	20	CP-QPSK	M	Outer_Full	19.32	PC2	PASS
N41	30	20	CP-QPSK	M	Edge_1RB_Left	19.10	PC2	PASS
N41	30	20	CP-QPSK	M	Inner_Full	19.36	PC2	PASS
N41	30	20	CP-QPSK	M	Edge_1RB_Right	19.36	PC2	PASS
N41	30	20	DFT-QPSK	H	Outer_Full	19.39	PC2	PASS

N41	30	20	DFT-QPSK	H	Edge_1RB_Left	19.13	PC2	PASS
N41	30	20	DFT-QPSK	H	Inner_Full	19.42	PC2	PASS
N41	30	20	DFT-QPSK	H	Edge_1RB_Right	19.16	PC2	PASS
N41	30	20	CP-QPSK	H	Outer_Full	19.38	PC2	PASS
N41	30	20	CP-QPSK	H	Edge_1RB_Left	19.28	PC2	PASS
N41	30	20	CP-QPSK	H	Inner_Full	19.44	PC2	PASS
N41	30	20	CP-QPSK	H	Edge_1RB_Right	19.28	PC2	PASS
N41	30	40	DFT-QPSK	L	Outer_Full	18.35	PC2	PASS
N41	30	40	DFT-QPSK	L	Edge_1RB_Left	18.22	PC2	PASS
N41	30	40	DFT-QPSK	L	Inner_Full	18.50	PC2	PASS
N41	30	40	DFT-QPSK	L	Edge_1RB_Right	17.79	PC2	PASS
N41	30	40	CP-QPSK	L	Outer_Full	18.25	PC2	PASS
N41	30	40	CP-QPSK	L	Edge_1RB_Left	18.25	PC2	PASS
N41	30	40	CP-QPSK	L	Inner_Full	18.42	PC2	PASS
N41	30	40	CP-QPSK	L	Edge_1RB_Right	17.95	PC2	PASS
N41	30	40	DFT-QPSK	M	Outer_Full	19.12	PC2	PASS
N41	30	40	DFT-QPSK	M	Edge_1RB_Left	18.30	PC2	PASS
N41	30	40	DFT-QPSK	M	Inner_Full	19.30	PC2	PASS
N41	30	40	DFT-QPSK	M	Edge_1RB_Right	18.92	PC2	PASS
N41	30	40	CP-QPSK	M	Outer_Full	19.02	PC2	PASS
N41	30	40	CP-QPSK	M	Edge_1RB_Left	18.61	PC2	PASS
N41	30	40	CP-QPSK	M	Inner_Full	19.21	PC2	PASS
N41	30	40	CP-QPSK	M	Edge_1RB_Right	19.39	PC2	PASS
N41	30	40	DFT-QPSK	H	Outer_Full	19.40	PC2	PASS
N41	30	40	DFT-QPSK	H	Edge_1RB_Left	19.31	PC2	PASS
N41	30	40	DFT-QPSK	H	Inner_Full	19.48	PC2	PASS
N41	30	40	DFT-QPSK	H	Edge_1RB_Right	18.92	PC2	PASS
N41	30	40	CP-QPSK	H	Outer_Full	19.26	PC2	PASS
N41	30	40	CP-QPSK	H	Edge_1RB_Left	19.75	PC2	PASS
N41	30	40	CP-QPSK	H	Inner_Full	19.40	PC2	PASS
N41	30	40	CP-QPSK	H	Edge_1RB_Right	19.24	PC2	PASS
N41	30	50	DFT-QPSK	L	Outer_Full	18.46	PC2	PASS
N41	30	50	DFT-QPSK	L	Edge_1RB_Left	18.37	PC2	PASS
N41	30	50	DFT-QPSK	L	Inner_Full	18.59	PC2	PASS
N41	30	50	DFT-QPSK	L	Edge_1RB_Right	18.15	PC2	PASS
N41	30	50	CP-QPSK	L	Outer_Full	18.38	PC2	PASS
N41	30	50	CP-QPSK	L	Edge_1RB_Left	18.85	PC2	PASS
N41	30	50	CP-QPSK	L	Inner_Full	18.55	PC2	PASS
N41	30	50	CP-QPSK	L	Edge_1RB_Right	18.60	PC2	PASS
N41	30	50	DFT-QPSK	M	Outer_Full	19.19	PC2	PASS
N41	30	50	DFT-QPSK	M	Edge_1RB_Left	18.60	PC2	PASS
N41	30	50	DFT-QPSK	M	Inner_Full	19.32	PC2	PASS

N41	30	50	DFT-QPSK	M	Edge_1RB_Right	19.39	PC2	PASS
N41	30	50	CP-QPSK	M	Outer_Full	19.10	PC2	PASS
N41	30	50	CP-QPSK	M	Edge_1RB_Left	18.64	PC2	PASS
N41	30	50	CP-QPSK	M	Inner_Full	19.27	PC2	PASS
N41	30	50	CP-QPSK	M	Edge_1RB_Right	19.52	PC2	PASS
N41	30	50	DFT-QPSK	H	Outer_Full	19.59	PC2	PASS
N41	30	50	DFT-QPSK	H	Edge_1RB_Left	19.43	PC2	PASS
N41	30	50	DFT-QPSK	H	Inner_Full	19.68	PC2	PASS
N41	30	50	DFT-QPSK	H	Edge_1RB_Right	19.16	PC2	PASS
N41	30	50	CP-QPSK	H	Outer_Full	19.52	PC2	PASS
N41	30	50	CP-QPSK	H	Edge_1RB_Left	19.55	PC2	PASS
N41	30	50	CP-QPSK	H	Inner_Full	19.56	PC2	PASS
N41	30	50	CP-QPSK	H	Edge_1RB_Right	19.27	PC2	PASS
N41	30	60	DFT-QPSK	L	Outer_Full	18.38	PC2	PASS
N41	30	60	DFT-QPSK	L	Edge_1RB_Left	18.25	PC2	PASS
N41	30	60	DFT-QPSK	L	Inner_Full	18.53	PC2	PASS
N41	30	60	DFT-QPSK	L	Edge_1RB_Right	18.43	PC2	PASS
N41	30	60	CP-QPSK	L	Outer_Full	18.28	PC2	PASS
N41	30	60	CP-QPSK	L	Edge_1RB_Left	18.65	PC2	PASS
N41	30	60	CP-QPSK	L	Inner_Full	18.49	PC2	PASS
N41	30	60	CP-QPSK	L	Edge_1RB_Right	18.83	PC2	PASS
N41	30	60	DFT-QPSK	M	Outer_Full	19.16	PC2	PASS
N41	30	60	DFT-QPSK	M	Edge_1RB_Left	18.48	PC2	PASS
N41	30	60	DFT-QPSK	M	Inner_Full	19.24	PC2	PASS
N41	30	60	DFT-QPSK	M	Edge_1RB_Right	19.38	PC2	PASS
N41	30	60	CP-QPSK	M	Outer_Full	19.13	PC2	PASS
N41	30	60	CP-QPSK	M	Edge_1RB_Left	18.56	PC2	PASS
N41	30	60	CP-QPSK	M	Inner_Full	19.25	PC2	PASS
N41	30	60	CP-QPSK	M	Edge_1RB_Right	19.52	PC2	PASS
N41	30	60	DFT-QPSK	H	Outer_Full	19.53	PC2	PASS
N41	30	60	DFT-QPSK	H	Edge_1RB_Left	19.36	PC2	PASS
N41	30	60	DFT-QPSK	H	Inner_Full	19.64	PC2	PASS
N41	30	60	DFT-QPSK	H	Edge_1RB_Right	19.06	PC2	PASS
N41	30	60	CP-QPSK	H	Outer_Full	19.47	PC2	PASS
N41	30	60	CP-QPSK	H	Edge_1RB_Left	19.70	PC2	PASS
N41	30	60	CP-QPSK	H	Inner_Full	19.61	PC2	PASS
N41	30	60	CP-QPSK	H	Edge_1RB_Right	19.29	PC2	PASS
N41	30	80	DFT-QPSK	L	Outer_Full	18.57	PC2	PASS
N41	30	80	DFT-QPSK	L	Edge_1RB_Left	18.11	PC2	PASS
N41	30	80	DFT-QPSK	L	Inner_Full	18.57	PC2	PASS
N41	30	80	DFT-QPSK	L	Edge_1RB_Right	18.44	PC2	PASS
N41	30	80	CP-QPSK	L	Outer_Full	18.49	PC2	PASS

N41	30	80	CP-QPSK	L	Edge_1RB_Left	18.47	PC2	PASS
N41	30	80	CP-QPSK	L	Inner_Full	18.52	PC2	PASS
N41	30	80	CP-QPSK	L	Edge_1RB_Right	18.65	PC2	PASS
N41	30	80	DFT-QPSK	M	Outer_Full	19.21	PC2	PASS
N41	30	80	DFT-QPSK	M	Edge_1RB_Left	18.22	PC2	PASS
N41	30	80	DFT-QPSK	M	Inner_Full	19.31	PC2	PASS
N41	30	80	DFT-QPSK	M	Edge_1RB_Right	19.15	PC2	PASS
N41	30	80	CP-QPSK	M	Outer_Full	19.15	PC2	PASS
N41	30	80	CP-QPSK	M	Edge_1RB_Left	18.47	PC2	PASS
N41	30	80	CP-QPSK	M	Inner_Full	19.24	PC2	PASS
N41	30	80	CP-QPSK	M	Edge_1RB_Right	19.46	PC2	PASS
N41	30	80	DFT-QPSK	H	Outer_Full	19.60	PC2	PASS
N41	30	80	DFT-QPSK	H	Edge_1RB_Left	18.69	PC2	PASS
N41	30	80	DFT-QPSK	H	Inner_Full	19.77	PC2	PASS
N41	30	80	DFT-QPSK	H	Edge_1RB_Right	18.77	PC2	PASS
N41	30	80	CP-QPSK	H	Outer_Full	19.51	PC2	PASS
N41	30	80	CP-QPSK	H	Edge_1RB_Left	19.24	PC2	PASS
N41	30	80	CP-QPSK	H	Inner_Full	19.66	PC2	PASS
N41	30	80	CP-QPSK	H	Edge_1RB_Right	19.30	PC2	PASS
N41	30	90	DFT-QPSK	L	Outer_Full	18.58	PC2	PASS
N41	30	90	DFT-QPSK	L	Edge_1RB_Left	18.01	PC2	PASS
N41	30	90	DFT-QPSK	L	Inner_Full	18.63	PC2	PASS
N41	30	90	DFT-QPSK	L	Edge_1RB_Right	18.55	PC2	PASS
N41	30	90	CP-QPSK	L	Outer_Full	18.56	PC2	PASS
N41	30	90	CP-QPSK	L	Edge_1RB_Left	18.07	PC2	PASS
N41	30	90	CP-QPSK	L	Inner_Full	18.62	PC2	PASS
N41	30	90	CP-QPSK	L	Edge_1RB_Right	18.65	PC2	PASS
N41	30	90	DFT-QPSK	M	Outer_Full	19.14	PC2	PASS
N41	30	90	DFT-QPSK	M	Edge_1RB_Left	17.84	PC2	PASS
N41	30	90	DFT-QPSK	M	Inner_Full	19.23	PC2	PASS
N41	30	90	DFT-QPSK	M	Edge_1RB_Right	18.91	PC2	PASS
N41	30	90	CP-QPSK	M	Outer_Full	19.08	PC2	PASS
N41	30	90	CP-QPSK	M	Edge_1RB_Left	18.28	PC2	PASS
N41	30	90	CP-QPSK	M	Inner_Full	19.21	PC2	PASS
N41	30	90	CP-QPSK	M	Edge_1RB_Right	19.26	PC2	PASS
N41	30	90	DFT-QPSK	H	Outer_Full	19.51	PC2	PASS
N41	30	90	DFT-QPSK	H	Edge_1RB_Left	18.52	PC2	PASS
N41	30	90	DFT-QPSK	H	Inner_Full	19.81	PC2	PASS
N41	30	90	DFT-QPSK	H	Edge_1RB_Right	18.68	PC2	PASS
N41	30	90	CP-QPSK	H	Outer_Full	19.43	PC2	PASS
N41	30	90	CP-QPSK	H	Edge_1RB_Left	18.87	PC2	PASS
N41	30	90	CP-QPSK	H	Inner_Full	19.75	PC2	PASS

N41	30	90	CP-QPSK	H	Edge_1RB_Right	18.91	PC2	PASS
N41	30	100	DFT-QPSK	L	Outer_Full	18.61	PC2	PASS
N41	30	100	DFT-QPSK	L	Edge_1RB_Left	17.81	PC2	PASS
N41	30	100	DFT-QPSK	L	Inner_Full	18.64	PC2	PASS
N41	30	100	DFT-QPSK	L	Edge_1RB_Right	18.52	PC2	PASS
N41	30	100	CP-QPSK	L	Outer_Full	18.60	PC2	PASS
N41	30	100	CP-QPSK	L	Edge_1RB_Left	17.83	PC2	PASS
N41	30	100	CP-QPSK	L	Inner_Full	18.65	PC2	PASS
N41	30	100	CP-QPSK	L	Edge_1RB_Right	18.60	PC2	PASS
N41	30	100	DFT-QPSK	M	Outer_Full	19.11	PC2	PASS
N41	30	100	DFT-QPSK	M	Edge_1RB_Left	17.52	PC2	PASS
N41	30	100	DFT-QPSK	M	Inner_Full	19.25	PC2	PASS
N41	30	100	DFT-QPSK	M	Edge_1RB_Right	18.81	PC2	PASS
N41	30	100	CP-QPSK	M	Outer_Full	19.10	PC2	PASS
N41	30	100	CP-QPSK	M	Edge_1RB_Left	17.51	PC2	PASS
N41	30	100	CP-QPSK	M	Inner_Full	19.24	PC2	PASS
N41	30	100	CP-QPSK	M	Edge_1RB_Right	18.82	PC2	PASS
N41	30	100	DFT-QPSK	H	Outer_Full	19.48	PC2	PASS
N41	30	100	DFT-QPSK	H	Edge_1RB_Left	18.28	PC2	PASS
N41	30	100	DFT-QPSK	H	Inner_Full	19.82	PC2	PASS
N41	30	100	DFT-QPSK	H	Edge_1RB_Right	18.45	PC2	PASS
N41	30	100	CP-QPSK	H	Outer_Full	19.40	PC2	PASS
N41	30	100	CP-QPSK	H	Edge_1RB_Left	18.84	PC2	PASS
N41	30	100	CP-QPSK	H	Inner_Full	19.75	PC2	PASS
N41	30	100	CP-QPSK	H	Edge_1RB_Right	18.78	PC2	PASS

5G NR(P1):

Band	SCS	Bandwidth	Modulation	Channel	RB Config	Power (dBm)	Power Class	Verdict
N66	15	5	DFT-QPSK	L	Edge_1RB_Left	22.42	PC3	PASS
N66	15	5	DFT-QPSK	L	Edge_1RB_Right	22.24	PC3	PASS
N66	15	5	DFT-QPSK	L	Outer_Full	22.24	PC3	PASS
N66	15	5	DFT-QPSK	L	Inner_Full	23.24	PC3	PASS
N66	15	5	CP-QPSK	L	Edge_1RB_Left	20.58	PC3	PASS
N66	15	5	CP-QPSK	L	Edge_1RB_Right	20.35	PC3	PASS
N66	15	5	CP-QPSK	L	Outer_Full	20.18	PC3	PASS
N66	15	5	CP-QPSK	L	Inner_Full	21.79	PC3	PASS
N66	15	5	DFT-QPSK	M	Edge_1RB_Left	21.73	PC3	PASS
N66	15	5	DFT-QPSK	M	Edge_1RB_Right	21.75	PC3	PASS
N66	15	5	DFT-QPSK	M	Outer_Full	21.74	PC3	PASS
N66	15	5	DFT-QPSK	M	Inner_Full	22.71	PC3	PASS

N66	15	5	CP-QPSK	M	Edge_1RB_Left	19.93	PC3	PASS
N66	15	5	CP-QPSK	M	Edge_1RB_Right	19.99	PC3	PASS
N66	15	5	CP-QPSK	M	Outer_Full	19.82	PC3	PASS
N66	15	5	CP-QPSK	M	Inner_Full	21.23	PC3	PASS
N66	15	5	DFT-QPSK	H	Edge_1RB_Left	21.22	PC3	PASS
N66	15	5	DFT-QPSK	H	Edge_1RB_Right	21.27	PC3	PASS
N66	15	5	DFT-QPSK	H	Outer_Full	21.25	PC3	PASS
N66	15	5	DFT-QPSK	H	Inner_Full	22.21	PC3	PASS
N66	15	5	CP-QPSK	H	Edge_1RB_Left	19.46	PC3	PASS
N66	15	5	CP-QPSK	H	Edge_1RB_Right	19.31	PC3	PASS
N66	15	5	CP-QPSK	H	Outer_Full	19.19	PC3	PASS
N66	15	5	CP-QPSK	H	Inner_Full	20.79	PC3	PASS
N66	15	10	DFT-QPSK	L	Edge_1RB_Left	22.04	PC3	PASS
N66	15	10	DFT-QPSK	L	Edge_1RB_Right	22.08	PC3	PASS
N66	15	10	DFT-QPSK	L	Outer_Full	21.96	PC3	PASS
N66	15	10	DFT-QPSK	L	Inner_Full	23.01	PC3	PASS
N66	15	10	CP-QPSK	L	Edge_1RB_Left	20.21	PC3	PASS
N66	15	10	CP-QPSK	L	Edge_1RB_Right	20.10	PC3	PASS
N66	15	10	CP-QPSK	L	Outer_Full	19.96	PC3	PASS
N66	15	10	CP-QPSK	L	Inner_Full	21.53	PC3	PASS
N66	15	10	DFT-QPSK	M	Edge_1RB_Left	21.70	PC3	PASS
N66	15	10	DFT-QPSK	M	Edge_1RB_Right	21.66	PC3	PASS
N66	15	10	DFT-QPSK	M	Outer_Full	21.50	PC3	PASS
N66	15	10	DFT-QPSK	M	Inner_Full	22.54	PC3	PASS
N66	15	10	CP-QPSK	M	Edge_1RB_Left	19.77	PC3	PASS
N66	15	10	CP-QPSK	M	Edge_1RB_Right	19.70	PC3	PASS
N66	15	10	CP-QPSK	M	Outer_Full	19.49	PC3	PASS
N66	15	10	CP-QPSK	M	Inner_Full	20.99	PC3	PASS
N66	15	10	DFT-QPSK	H	Edge_1RB_Left	21.28	PC3	PASS
N66	15	10	DFT-QPSK	H	Edge_1RB_Right	21.26	PC3	PASS
N66	15	10	DFT-QPSK	H	Outer_Full	21.08	PC3	PASS
N66	15	10	DFT-QPSK	H	Inner_Full	22.11	PC3	PASS
N66	15	10	CP-QPSK	H	Edge_1RB_Left	19.44	PC3	PASS
N66	15	10	CP-QPSK	H	Edge_1RB_Right	19.35	PC3	PASS
N66	15	10	CP-QPSK	H	Outer_Full	19.05	PC3	PASS
N66	15	10	CP-QPSK	H	Inner_Full	20.47	PC3	PASS
N66	15	15	DFT-QPSK	L	Edge_1RB_Left	22.11	PC3	PASS
N66	15	15	DFT-QPSK	L	Edge_1RB_Right	21.93	PC3	PASS
N66	15	15	DFT-QPSK	L	Outer_Full	22.10	PC3	PASS
N66	15	15	DFT-QPSK	L	Inner_Full	23.18	PC3	PASS
N66	15	15	CP-QPSK	L	Edge_1RB_Left	20.26	PC3	PASS
N66	15	15	CP-QPSK	L	Edge_1RB_Right	20.08	PC3	PASS

N66	15	15	CP-QPSK	L	Outer_Full	20.16	PC3	PASS
N66	15	15	CP-QPSK	L	Inner_Full	21.66	PC3	PASS
N66	15	15	DFT-QPSK	M	Edge_1RB_Left	21.79	PC3	PASS
N66	15	15	DFT-QPSK	M	Edge_1RB_Right	21.67	PC3	PASS
N66	15	15	DFT-QPSK	M	Outer_Full	21.76	PC3	PASS
N66	15	15	DFT-QPSK	M	Inner_Full	22.72	PC3	PASS
N66	15	15	CP-QPSK	M	Edge_1RB_Left	19.93	PC3	PASS
N66	15	15	CP-QPSK	M	Edge_1RB_Right	19.79	PC3	PASS
N66	15	15	CP-QPSK	M	Outer_Full	19.78	PC3	PASS
N66	15	15	CP-QPSK	M	Inner_Full	21.25	PC3	PASS
N66	15	15	DFT-QPSK	H	Edge_1RB_Left	21.27	PC3	PASS
N66	15	15	DFT-QPSK	H	Edge_1RB_Right	21.17	PC3	PASS
N66	15	15	DFT-QPSK	H	Outer_Full	21.31	PC3	PASS
N66	15	15	DFT-QPSK	H	Inner_Full	22.28	PC3	PASS
N66	15	15	CP-QPSK	H	Edge_1RB_Left	19.31	PC3	PASS
N66	15	15	CP-QPSK	H	Edge_1RB_Right	19.23	PC3	PASS
N66	15	15	CP-QPSK	H	Outer_Full	19.38	PC3	PASS
N66	15	15	CP-QPSK	H	Inner_Full	20.82	PC3	PASS
N66	15	20	DFT-QPSK	L	Edge_1RB_Left	22.13	PC3	PASS
N66	15	20	DFT-QPSK	L	Edge_1RB_Right	21.72	PC3	PASS
N66	15	20	DFT-QPSK	L	Outer_Full	21.95	PC3	PASS
N66	15	20	DFT-QPSK	L	Inner_Full	23.05	PC3	PASS
N66	15	20	CP-QPSK	L	Edge_1RB_Left	20.29	PC3	PASS
N66	15	20	CP-QPSK	L	Edge_1RB_Right	19.88	PC3	PASS
N66	15	20	CP-QPSK	L	Outer_Full	19.89	PC3	PASS
N66	15	20	CP-QPSK	L	Inner_Full	21.48	PC3	PASS
N66	15	20	DFT-QPSK	M	Edge_1RB_Left	21.90	PC3	PASS
N66	15	20	DFT-QPSK	M	Edge_1RB_Right	21.61	PC3	PASS
N66	15	20	DFT-QPSK	M	Outer_Full	21.76	PC3	PASS
N66	15	20	DFT-QPSK	M	Inner_Full	22.76	PC3	PASS
N66	15	20	CP-QPSK	M	Edge_1RB_Left	20.02	PC3	PASS
N66	15	20	CP-QPSK	M	Edge_1RB_Right	19.79	PC3	PASS
N66	15	20	CP-QPSK	M	Outer_Full	19.73	PC3	PASS
N66	15	20	CP-QPSK	M	Inner_Full	21.22	PC3	PASS
N66	15	20	DFT-QPSK	H	Edge_1RB_Left	21.44	PC3	PASS
N66	15	20	DFT-QPSK	H	Edge_1RB_Right	21.22	PC3	PASS
N66	15	20	DFT-QPSK	H	Outer_Full	21.32	PC3	PASS
N66	15	20	DFT-QPSK	H	Inner_Full	22.34	PC3	PASS
N66	15	20	CP-QPSK	H	Edge_1RB_Left	19.56	PC3	PASS
N66	15	20	CP-QPSK	H	Edge_1RB_Right	19.28	PC3	PASS
N66	15	20	CP-QPSK	H	Outer_Full	19.32	PC3	PASS
N66	15	20	CP-QPSK	H	Inner_Full	20.81	PC3	PASS

5G NR(P4): Sensor ON

Band	SCS	Bandwidth	Modulation	Channel	RB Config	Power (dBm)	Power Class	Verdict
N66	15	5	DFT-QPSK	L	Edge_1RB_Left	20.09	PC3	PASS
N66	15	5	DFT-QPSK	L	Edge_1RB_Right	20.01	PC3	PASS
N66	15	5	DFT-QPSK	L	Outer_Full	20.11	PC3	PASS
N66	15	5	DFT-QPSK	L	Inner_Full	20.03	PC3	PASS
N66	15	5	CP-QPSK	L	Edge_1RB_Left	20.14	PC3	PASS
N66	15	5	CP-QPSK	L	Edge_1RB_Right	20.04	PC3	PASS
N66	15	5	CP-QPSK	L	Outer_Full	20.05	PC3	PASS
N66	15	5	CP-QPSK	L	Inner_Full	20.14	PC3	PASS
N66	15	5	DFT-QPSK	M	Edge_1RB_Left	19.60	PC3	PASS
N66	15	5	DFT-QPSK	M	Edge_1RB_Right	19.61	PC3	PASS
N66	15	5	DFT-QPSK	M	Outer_Full	19.61	PC3	PASS
N66	15	5	DFT-QPSK	M	Inner_Full	19.66	PC3	PASS
N66	15	5	CP-QPSK	M	Edge_1RB_Left	19.68	PC3	PASS
N66	15	5	CP-QPSK	M	Edge_1RB_Right	19.60	PC3	PASS
N66	15	5	CP-QPSK	M	Outer_Full	19.62	PC3	PASS
N66	15	5	CP-QPSK	M	Inner_Full	19.27	PC3	PASS
N66	15	5	DFT-QPSK	H	Edge_1RB_Left	19.27	PC3	PASS
N66	15	5	DFT-QPSK	H	Edge_1RB_Right	19.30	PC3	PASS
N66	15	5	DFT-QPSK	H	Outer_Full	19.27	PC3	PASS
N66	15	5	DFT-QPSK	H	Inner_Full	19.28	PC3	PASS
N66	15	5	CP-QPSK	H	Edge_1RB_Left	19.17	PC3	PASS
N66	15	5	CP-QPSK	H	Edge_1RB_Right	19.27	PC3	PASS
N66	15	5	CP-QPSK	H	Outer_Full	19.31	PC3	PASS
N66	15	5	CP-QPSK	H	Inner_Full	19.77	PC3	PASS
N66	15	10	DFT-QPSK	L	Edge_1RB_Left	19.76	PC3	PASS
N66	15	10	DFT-QPSK	L	Edge_1RB_Right	19.84	PC3	PASS
N66	15	10	DFT-QPSK	L	Outer_Full	19.70	PC3	PASS
N66	15	10	DFT-QPSK	L	Inner_Full	19.76	PC3	PASS
N66	15	10	CP-QPSK	L	Edge_1RB_Left	19.77	PC3	PASS
N66	15	10	CP-QPSK	L	Edge_1RB_Right	19.88	PC3	PASS
N66	15	10	CP-QPSK	L	Outer_Full	19.76	PC3	PASS
N66	15	10	CP-QPSK	L	Inner_Full	19.45	PC3	PASS
N66	15	10	DFT-QPSK	M	Edge_1RB_Left	19.43	PC3	PASS
N66	15	10	DFT-QPSK	M	Edge_1RB_Right	19.40	PC3	PASS
N66	15	10	DFT-QPSK	M	Outer_Full	19.41	PC3	PASS
N66	15	10	DFT-QPSK	M	Inner_Full	19.45	PC3	PASS
N66	15	10	CP-QPSK	M	Edge_1RB_Left	19.36	PC3	PASS
N66	15	10	CP-QPSK	M	Edge_1RB_Right	19.47	PC3	PASS

N66	15	10	CP-QPSK	M	Outer_Full	19.33	PC3	PASS
N66	15	10	CP-QPSK	M	Inner_Full	19.08	PC3	PASS
N66	15	10	DFT-QPSK	H	Edge_1RB_Left	19.09	PC3	PASS
N66	15	10	DFT-QPSK	H	Edge_1RB_Right	19.05	PC3	PASS
N66	15	10	DFT-QPSK	H	Outer_Full	19.06	PC3	PASS
N66	15	10	DFT-QPSK	H	Inner_Full	19.09	PC3	PASS
N66	15	10	CP-QPSK	H	Edge_1RB_Left	19.20	PC3	PASS
N66	15	10	CP-QPSK	H	Edge_1RB_Right	19.14	PC3	PASS
N66	15	10	CP-QPSK	H	Outer_Full	18.97	PC3	PASS
N66	15	10	CP-QPSK	H	Inner_Full	19.97	PC3	PASS
N66	15	15	DFT-QPSK	L	Edge_1RB_Left	19.88	PC3	PASS
N66	15	15	DFT-QPSK	L	Edge_1RB_Right	19.92	PC3	PASS
N66	15	15	DFT-QPSK	L	Outer_Full	19.87	PC3	PASS
N66	15	15	DFT-QPSK	L	Inner_Full	19.97	PC3	PASS
N66	15	15	CP-QPSK	L	Edge_1RB_Left	19.83	PC3	PASS
N66	15	15	CP-QPSK	L	Edge_1RB_Right	19.99	PC3	PASS
N66	15	15	CP-QPSK	L	Outer_Full	19.80	PC3	PASS
N66	15	15	CP-QPSK	L	Inner_Full	19.68	PC3	PASS
N66	15	15	DFT-QPSK	M	Edge_1RB_Left	19.50	PC3	PASS
N66	15	15	DFT-QPSK	M	Edge_1RB_Right	19.65	PC3	PASS
N66	15	15	DFT-QPSK	M	Outer_Full	19.52	PC3	PASS
N66	15	15	DFT-QPSK	M	Inner_Full	19.69	PC3	PASS
N66	15	15	CP-QPSK	M	Edge_1RB_Left	19.51	PC3	PASS
N66	15	15	CP-QPSK	M	Edge_1RB_Right	19.65	PC3	PASS
N66	15	15	CP-QPSK	M	Outer_Full	19.41	PC3	PASS
N66	15	15	CP-QPSK	M	Inner_Full	20.09	PC3	PASS
N66	15	15	DFT-QPSK	H	Edge_1RB_Left	19.20	PC3	PASS
N66	15	15	DFT-QPSK	H	Edge_1RB_Right	19.14	PC3	PASS
N66	15	15	DFT-QPSK	H	Outer_Full	19.07	PC3	PASS
N66	15	15	DFT-QPSK	H	Inner_Full	19.08	PC3	PASS
N66	15	15	CP-QPSK	H	Edge_1RB_Left	18.90	PC3	PASS
N66	15	15	CP-QPSK	H	Edge_1RB_Right	19.21	PC3	PASS
N66	15	15	CP-QPSK	H	Outer_Full	19.23	PC3	PASS
N66	15	15	CP-QPSK	H	Inner_Full	19.09	PC3	PASS
N66	15	20	DFT-QPSK	L	Edge_1RB_Left	19.68	PC3	PASS
N66	15	20	DFT-QPSK	L	Edge_1RB_Right	19.73	PC3	PASS
N66	15	20	DFT-QPSK	L	Outer_Full	20.15	PC3	PASS
N66	15	20	DFT-QPSK	L	Inner_Full	19.46	PC3	PASS
N66	15	20	CP-QPSK	L	Edge_1RB_Left	19.71	PC3	PASS
N66	15	20	CP-QPSK	L	Edge_1RB_Right	19.74	PC3	PASS
N66	15	20	CP-QPSK	L	Outer_Full	19.82	PC3	PASS
N66	15	20	CP-QPSK	L	Inner_Full	19.55	PC3	PASS

N66	15	20	DFT-QPSK	M	Edge_1RB_Left	19.55	PC3	PASS
N66	15	20	DFT-QPSK	M	Edge_1RB_Right	19.46	PC3	PASS
N66	15	20	DFT-QPSK	M	Outer_Full	19.51	PC3	PASS
N66	15	20	DFT-QPSK	M	Inner_Full	19.28	PC3	PASS
N66	15	20	CP-QPSK	M	Edge_1RB_Left	19.60	PC3	PASS
N66	15	20	CP-QPSK	M	Edge_1RB_Right	19.54	PC3	PASS
N66	15	20	CP-QPSK	M	Outer_Full	19.52	PC3	PASS
N66	15	20	CP-QPSK	M	Inner_Full	19.36	PC3	PASS
N66	15	20	DFT-QPSK	H	Edge_1RB_Left	19.23	PC3	PASS
N66	15	20	DFT-QPSK	H	Edge_1RB_Right	19.14	PC3	PASS
N66	15	20	DFT-QPSK	H	Outer_Full	19.14	PC3	PASS
N66	15	20	DFT-QPSK	H	Inner_Full	18.95	PC3	PASS
N66	15	20	CP-QPSK	H	Edge_1RB_Left	19.18	PC3	PASS
N66	15	20	CP-QPSK	H	Edge_1RB_Right	19.12	PC3	PASS
N66	15	20	CP-QPSK	H	Outer_Full	19.21	PC3	PASS
N66	15	20	CP-QPSK	H	Inner_Full	19.00	PC3	PASS

5G NR(P2): Receiver ON

Band	SCS	Bandwidth	Modulation	Channel	RB Config	Power (dBm)	Power Class	Verdict
N66	15	5	DFT-QPSK	L	Edge_1RB_Left	15.00	PC3	PASS
N66	15	5	DFT-QPSK	L	Edge_1RB_Right	14.92	PC3	PASS
N66	15	5	DFT-QPSK	L	Outer_Full	15.00	PC3	PASS
N66	15	5	DFT-QPSK	L	Inner_Full	14.91	PC3	PASS
N66	15	5	CP-QPSK	L	Edge_1RB_Left	14.98	PC3	PASS
N66	15	5	CP-QPSK	L	Edge_1RB_Right	14.97	PC3	PASS
N66	15	5	CP-QPSK	L	Outer_Full	14.92	PC3	PASS
N66	15	5	CP-QPSK	L	Inner_Full	14.89	PC3	PASS
N66	15	5	DFT-QPSK	M	Edge_1RB_Left	14.51	PC3	PASS
N66	15	5	DFT-QPSK	M	Edge_1RB_Right	14.59	PC3	PASS
N66	15	5	DFT-QPSK	M	Outer_Full	14.48	PC3	PASS
N66	15	5	DFT-QPSK	M	Inner_Full	14.55	PC3	PASS
N66	15	5	CP-QPSK	M	Edge_1RB_Left	14.60	PC3	PASS
N66	15	5	CP-QPSK	M	Edge_1RB_Right	14.48	PC3	PASS
N66	15	5	CP-QPSK	M	Outer_Full	14.64	PC3	PASS
N66	15	5	CP-QPSK	M	Inner_Full	14.18	PC3	PASS
N66	15	5	DFT-QPSK	H	Edge_1RB_Left	14.11	PC3	PASS
N66	15	5	DFT-QPSK	H	Edge_1RB_Right	14.19	PC3	PASS
N66	15	5	DFT-QPSK	H	Outer_Full	14.09	PC3	PASS
N66	15	5	DFT-QPSK	H	Inner_Full	14.21	PC3	PASS
N66	15	5	CP-QPSK	H	Edge_1RB_Left	14.08	PC3	PASS

N66	15	5	CP-QPSK	H	Edge_1RB_Right	14.19	PC3	PASS
N66	15	5	CP-QPSK	H	Outer_Full	14.19	PC3	PASS
N66	15	5	CP-QPSK	H	Inner_Full	14.71	PC3	PASS
N66	15	10	DFT-QPSK	L	Edge_1RB_Left	14.71	PC3	PASS
N66	15	10	DFT-QPSK	L	Edge_1RB_Right	14.80	PC3	PASS
N66	15	10	DFT-QPSK	L	Outer_Full	14.61	PC3	PASS
N66	15	10	DFT-QPSK	L	Inner_Full	14.75	PC3	PASS
N66	15	10	CP-QPSK	L	Edge_1RB_Left	14.76	PC3	PASS
N66	15	10	CP-QPSK	L	Edge_1RB_Right	14.73	PC3	PASS
N66	15	10	CP-QPSK	L	Outer_Full	14.64	PC3	PASS
N66	15	10	CP-QPSK	L	Inner_Full	14.37	PC3	PASS
N66	15	10	DFT-QPSK	M	Edge_1RB_Left	14.26	PC3	PASS
N66	15	10	DFT-QPSK	M	Edge_1RB_Right	14.34	PC3	PASS
N66	15	10	DFT-QPSK	M	Outer_Full	14.21	PC3	PASS
N66	15	10	DFT-QPSK	M	Inner_Full	14.35	PC3	PASS
N66	15	10	CP-QPSK	M	Edge_1RB_Left	14.37	PC3	PASS
N66	15	10	CP-QPSK	M	Edge_1RB_Right	14.41	PC3	PASS
N66	15	10	CP-QPSK	M	Outer_Full	14.34	PC3	PASS
N66	15	10	CP-QPSK	M	Inner_Full	14.02	PC3	PASS
N66	15	10	DFT-QPSK	H	Edge_1RB_Left	14.01	PC3	PASS
N66	15	10	DFT-QPSK	H	Edge_1RB_Right	14.04	PC3	PASS
N66	15	10	DFT-QPSK	H	Outer_Full	13.85	PC3	PASS
N66	15	10	DFT-QPSK	H	Inner_Full	14.05	PC3	PASS
N66	15	10	CP-QPSK	H	Edge_1RB_Left	14.13	PC3	PASS
N66	15	10	CP-QPSK	H	Edge_1RB_Right	14.02	PC3	PASS
N66	15	10	CP-QPSK	H	Outer_Full	14.00	PC3	PASS
N66	15	10	CP-QPSK	H	Inner_Full	14.84	PC3	PASS
N66	15	15	DFT-QPSK	L	Edge_1RB_Left	14.90	PC3	PASS
N66	15	15	DFT-QPSK	L	Edge_1RB_Right	14.90	PC3	PASS
N66	15	15	DFT-QPSK	L	Outer_Full	14.65	PC3	PASS
N66	15	15	DFT-QPSK	L	Inner_Full	14.90	PC3	PASS
N66	15	15	CP-QPSK	L	Edge_1RB_Left	14.88	PC3	PASS
N66	15	15	CP-QPSK	L	Edge_1RB_Right	14.96	PC3	PASS
N66	15	15	CP-QPSK	L	Outer_Full	14.68	PC3	PASS
N66	15	15	CP-QPSK	L	Inner_Full	14.56	PC3	PASS
N66	15	15	DFT-QPSK	M	Edge_1RB_Left	14.39	PC3	PASS
N66	15	15	DFT-QPSK	M	Edge_1RB_Right	14.56	PC3	PASS
N66	15	15	DFT-QPSK	M	Outer_Full	14.49	PC3	PASS
N66	15	15	DFT-QPSK	M	Inner_Full	14.61	PC3	PASS
N66	15	15	CP-QPSK	M	Edge_1RB_Left	14.46	PC3	PASS
N66	15	15	CP-QPSK	M	Edge_1RB_Right	14.55	PC3	PASS
N66	15	15	CP-QPSK	M	Outer_Full	14.44	PC3	PASS

N66	15	15	CP-QPSK	M	Inner_Full	14.30	PC3	PASS
N66	15	15	DFT-QPSK	H	Edge_1RB_Left	14.14	PC3	PASS
N66	15	15	DFT-QPSK	H	Edge_1RB_Right	14.25	PC3	PASS
N66	15	15	DFT-QPSK	H	Outer_Full	13.95	PC3	PASS
N66	15	15	DFT-QPSK	H	Inner_Full	14.31	PC3	PASS
N66	15	15	CP-QPSK	H	Edge_1RB_Left	14.10	PC3	PASS
N66	15	15	CP-QPSK	H	Edge_1RB_Right	14.23	PC3	PASS
N66	15	15	CP-QPSK	H	Outer_Full	14.17	PC3	PASS
N66	15	15	CP-QPSK	H	Inner_Full	14.77	PC3	PASS
N66	15	20	DFT-QPSK	L	Edge_1RB_Left	14.74	PC3	PASS
N66	15	20	DFT-QPSK	L	Edge_1RB_Right	15.01	PC3	PASS
N66	15	20	DFT-QPSK	L	Outer_Full	14.50	PC3	PASS
N66	15	20	DFT-QPSK	L	Inner_Full	14.74	PC3	PASS
N66	15	20	CP-QPSK	L	Edge_1RB_Left	14.70	PC3	PASS
N66	15	20	CP-QPSK	L	Edge_1RB_Right	14.82	PC3	PASS
N66	15	20	CP-QPSK	L	Outer_Full	14.43	PC3	PASS
N66	15	20	CP-QPSK	L	Inner_Full	14.62	PC3	PASS
N66	15	20	DFT-QPSK	M	Edge_1RB_Left	14.36	PC3	PASS
N66	15	20	DFT-QPSK	M	Edge_1RB_Right	14.53	PC3	PASS
N66	15	20	DFT-QPSK	M	Outer_Full	14.38	PC3	PASS
N66	15	20	DFT-QPSK	M	Inner_Full	14.57	PC3	PASS
N66	15	20	CP-QPSK	M	Edge_1RB_Left	14.54	PC3	PASS
N66	15	20	CP-QPSK	M	Edge_1RB_Right	14.53	PC3	PASS
N66	15	20	CP-QPSK	M	Outer_Full	14.37	PC3	PASS
N66	15	20	CP-QPSK	M	Inner_Full	14.35	PC3	PASS
N66	15	20	DFT-QPSK	H	Edge_1RB_Left	14.11	PC3	PASS
N66	15	20	DFT-QPSK	H	Edge_1RB_Right	14.27	PC3	PASS
N66	15	20	DFT-QPSK	H	Outer_Full	14.01	PC3	PASS
N66	15	20	DFT-QPSK	H	Inner_Full	14.30	PC3	PASS
N66	15	20	CP-QPSK	H	Edge_1RB_Left	14.22	PC3	PASS
N66	15	20	CP-QPSK	H	Edge_1RB_Right	14.32	PC3	PASS
N66	15	20	CP-QPSK	H	Outer_Full	14.05	PC3	PASS
N66	15	20	CP-QPSK	H	Inner_Full	15.00	PC3	PASS

5G NR(P3): Hotspot ON

Band	SCS	Bandwidth	Modulation	Channel	RB Config	Power (dBm)	Power Class	Verdict
N66	15	5	DFT-QPSK	L	Edge_1RB_Left	20.11	PC3	PASS
N66	15	5	DFT-QPSK	L	Edge_1RB_Right	20.02	PC3	PASS
N66	15	5	DFT-QPSK	L	Outer_Full	20.00	PC3	PASS
N66	15	5	DFT-QPSK	L	Inner_Full	20.11	PC3	PASS

N66	15	5	CP-QPSK	L	Edge_1RB_Left	20.01	PC3	PASS
N66	15	5	CP-QPSK	L	Edge_1RB_Right	20.04	PC3	PASS
N66	15	5	CP-QPSK	L	Outer_Full	20.03	PC3	PASS
N66	15	5	CP-QPSK	L	Inner_Full	20.05	PC3	PASS
N66	15	5	DFT-QPSK	M	Edge_1RB_Left	19.60	PC3	PASS
N66	15	5	DFT-QPSK	M	Edge_1RB_Right	19.60	PC3	PASS
N66	15	5	DFT-QPSK	M	Outer_Full	19.64	PC3	PASS
N66	15	5	DFT-QPSK	M	Inner_Full	19.62	PC3	PASS
N66	15	5	CP-QPSK	M	Edge_1RB_Left	19.62	PC3	PASS
N66	15	5	CP-QPSK	M	Edge_1RB_Right	19.61	PC3	PASS
N66	15	5	CP-QPSK	M	Outer_Full	19.60	PC3	PASS
N66	15	5	CP-QPSK	M	Inner_Full	19.60	PC3	PASS
N66	15	5	DFT-QPSK	H	Edge_1RB_Left	19.24	PC3	PASS
N66	15	5	DFT-QPSK	H	Edge_1RB_Right	19.22	PC3	PASS
N66	15	5	DFT-QPSK	H	Outer_Full	19.29	PC3	PASS
N66	15	5	DFT-QPSK	H	Inner_Full	19.28	PC3	PASS
N66	15	5	CP-QPSK	H	Edge_1RB_Left	19.29	PC3	PASS
N66	15	5	CP-QPSK	H	Edge_1RB_Right	19.18	PC3	PASS
N66	15	5	CP-QPSK	H	Outer_Full	19.24	PC3	PASS
N66	15	5	CP-QPSK	H	Inner_Full	19.31	PC3	PASS
N66	15	10	DFT-QPSK	L	Edge_1RB_Left	19.80	PC3	PASS
N66	15	10	DFT-QPSK	L	Edge_1RB_Right	19.75	PC3	PASS
N66	15	10	DFT-QPSK	L	Outer_Full	19.81	PC3	PASS
N66	15	10	DFT-QPSK	L	Inner_Full	19.74	PC3	PASS
N66	15	10	CP-QPSK	L	Edge_1RB_Left	19.78	PC3	PASS
N66	15	10	CP-QPSK	L	Edge_1RB_Right	19.82	PC3	PASS
N66	15	10	CP-QPSK	L	Outer_Full	19.88	PC3	PASS
N66	15	10	CP-QPSK	L	Inner_Full	19.67	PC3	PASS
N66	15	10	DFT-QPSK	M	Edge_1RB_Left	19.42	PC3	PASS
N66	15	10	DFT-QPSK	M	Edge_1RB_Right	19.45	PC3	PASS
N66	15	10	DFT-QPSK	M	Outer_Full	19.39	PC3	PASS
N66	15	10	DFT-QPSK	M	Inner_Full	19.40	PC3	PASS
N66	15	10	CP-QPSK	M	Edge_1RB_Left	19.40	PC3	PASS
N66	15	10	CP-QPSK	M	Edge_1RB_Right	19.50	PC3	PASS
N66	15	10	CP-QPSK	M	Outer_Full	19.46	PC3	PASS
N66	15	10	CP-QPSK	M	Inner_Full	19.52	PC3	PASS
N66	15	10	DFT-QPSK	H	Edge_1RB_Left	19.06	PC3	PASS
N66	15	10	DFT-QPSK	H	Edge_1RB_Right	19.08	PC3	PASS
N66	15	10	DFT-QPSK	H	Outer_Full	19.05	PC3	PASS
N66	15	10	DFT-QPSK	H	Inner_Full	19.05	PC3	PASS
N66	15	10	CP-QPSK	H	Edge_1RB_Left	19.11	PC3	PASS
N66	15	10	CP-QPSK	H	Edge_1RB_Right	19.03	PC3	PASS

N66	15	10	CP-QPSK	H	Outer_Full	19.13	PC3	PASS
N66	15	10	CP-QPSK	H	Inner_Full	19.07	PC3	PASS
N66	15	15	DFT-QPSK	L	Edge_1RB_Left	19.89	PC3	PASS
N66	15	15	DFT-QPSK	L	Edge_1RB_Right	19.78	PC3	PASS
N66	15	15	DFT-QPSK	L	Outer_Full	19.93	PC3	PASS
N66	15	15	DFT-QPSK	L	Inner_Full	19.78	PC3	PASS
N66	15	15	CP-QPSK	L	Edge_1RB_Left	20.01	PC3	PASS
N66	15	15	CP-QPSK	L	Edge_1RB_Right	19.85	PC3	PASS
N66	15	15	CP-QPSK	L	Outer_Full	19.98	PC3	PASS
N66	15	15	CP-QPSK	L	Inner_Full	19.90	PC3	PASS
N66	15	15	DFT-QPSK	M	Edge_1RB_Left	19.60	PC3	PASS
N66	15	15	DFT-QPSK	M	Edge_1RB_Right	19.45	PC3	PASS
N66	15	15	DFT-QPSK	M	Outer_Full	19.55	PC3	PASS
N66	15	15	DFT-QPSK	M	Inner_Full	19.45	PC3	PASS
N66	15	15	CP-QPSK	M	Edge_1RB_Left	19.62	PC3	PASS
N66	15	15	CP-QPSK	M	Edge_1RB_Right	19.49	PC3	PASS
N66	15	15	CP-QPSK	M	Outer_Full	19.66	PC3	PASS
N66	15	15	CP-QPSK	M	Inner_Full	19.42	PC3	PASS
N66	15	15	DFT-QPSK	H	Edge_1RB_Left	19.33	PC3	PASS
N66	15	15	DFT-QPSK	H	Edge_1RB_Right	19.17	PC3	PASS
N66	15	15	DFT-QPSK	H	Outer_Full	19.28	PC3	PASS
N66	15	15	DFT-QPSK	H	Inner_Full	19.08	PC3	PASS
N66	15	15	CP-QPSK	H	Edge_1RB_Left	19.33	PC3	PASS
N66	15	15	CP-QPSK	H	Edge_1RB_Right	19.12	PC3	PASS
N66	15	15	CP-QPSK	H	Outer_Full	19.32	PC3	PASS
N66	15	15	CP-QPSK	H	Inner_Full	19.24	PC3	PASS
N66	15	20	DFT-QPSK	L	Edge_1RB_Left	19.85	PC3	PASS
N66	15	20	DFT-QPSK	L	Edge_1RB_Right	19.80	PC3	PASS
N66	15	20	DFT-QPSK	L	Outer_Full	20.12	PC3	PASS
N66	15	20	DFT-QPSK	L	Inner_Full	19.60	PC3	PASS
N66	15	20	CP-QPSK	L	Edge_1RB_Left	19.79	PC3	PASS
N66	15	20	CP-QPSK	L	Edge_1RB_Right	19.75	PC3	PASS
N66	15	20	CP-QPSK	L	Outer_Full	19.88	PC3	PASS
N66	15	20	CP-QPSK	L	Inner_Full	19.54	PC3	PASS
N66	15	20	DFT-QPSK	M	Edge_1RB_Left	19.68	PC3	PASS
N66	15	20	DFT-QPSK	M	Edge_1RB_Right	19.55	PC3	PASS
N66	15	20	DFT-QPSK	M	Outer_Full	19.59	PC3	PASS
N66	15	20	DFT-QPSK	M	Inner_Full	19.43	PC3	PASS
N66	15	20	CP-QPSK	M	Edge_1RB_Left	19.70	PC3	PASS
N66	15	20	CP-QPSK	M	Edge_1RB_Right	19.57	PC3	PASS
N66	15	20	CP-QPSK	M	Outer_Full	19.54	PC3	PASS
N66	15	20	CP-QPSK	M	Inner_Full	19.48	PC3	PASS

N66	15	20	DFT-QPSK	H	Edge_1RB_Left	19.37	PC3	PASS
N66	15	20	DFT-QPSK	H	Edge_1RB_Right	19.26	PC3	PASS
N66	15	20	DFT-QPSK	H	Outer_Full	19.27	PC3	PASS
N66	15	20	DFT-QPSK	H	Inner_Full	19.08	PC3	PASS
N66	15	20	CP-QPSK	H	Edge_1RB_Left	19.36	PC3	PASS
N66	15	20	CP-QPSK	H	Edge_1RB_Right	19.21	PC3	PASS
N66	15	20	CP-QPSK	H	Outer_Full	19.30	PC3	PASS
N66	15	20	CP-QPSK	H	Inner_Full	19.03	PC3	PASS

Band	SCS	Bandwidth	Modulation	Channel	RB Config	Power (dBm)	Power Class	Verdict
N71	15	5	DFT-QPSK	L	Outer_Full	21.22	PC3	PASS
N71	15	5	DFT-QPSK	L	Edge_1RB_Left	21.23	PC3	PASS
N71	15	5	DFT-QPSK	L	Inner_Full	22.16	PC3	PASS
N71	15	5	DFT-QPSK	L	Edge_1RB_Right	21.23	PC3	PASS
N71	15	5	CP-QPSK	L	Outer_Full	20.25	PC3	PASS
N71	15	5	CP-QPSK	L	Edge_1RB_Left	20.39	PC3	PASS
N71	15	5	CP-QPSK	L	Inner_Full	20.70	PC3	PASS
N71	15	5	CP-QPSK	L	Edge_1RB_Right	20.28	PC3	PASS
N71	15	5	DFT-QPSK	M	Outer_Full	21.21	PC3	PASS
N71	15	5	DFT-QPSK	M	Edge_1RB_Left	21.25	PC3	PASS
N71	15	5	DFT-QPSK	M	Inner_Full	22.20	PC3	PASS
N71	15	5	DFT-QPSK	M	Edge_1RB_Right	21.09	PC3	PASS
N71	15	5	CP-QPSK	M	Outer_Full	20.32	PC3	PASS
N71	15	5	CP-QPSK	M	Edge_1RB_Left	20.35	PC3	PASS
N71	15	5	CP-QPSK	M	Inner_Full	20.76	PC3	PASS
N71	15	5	CP-QPSK	M	Edge_1RB_Right	20.29	PC3	PASS
N71	15	5	DFT-QPSK	H	Outer_Full	21.16	PC3	PASS
N71	15	5	DFT-QPSK	H	Edge_1RB_Left	21.08	PC3	PASS
N71	15	5	DFT-QPSK	H	Inner_Full	22.14	PC3	PASS
N71	15	5	DFT-QPSK	H	Edge_1RB_Right	21.19	PC3	PASS
N71	15	5	CP-QPSK	H	Outer_Full	20.26	PC3	PASS
N71	15	5	CP-QPSK	H	Edge_1RB_Left	20.22	PC3	PASS
N71	15	5	CP-QPSK	H	Inner_Full	20.61	PC3	PASS
N71	15	5	CP-QPSK	H	Edge_1RB_Right	20.29	PC3	PASS
N71	15	10	DFT-QPSK	L	Outer_Full	20.87	PC3	PASS
N71	15	10	DFT-QPSK	L	Edge_1RB_Left	20.86	PC3	PASS
N71	15	10	DFT-QPSK	L	Inner_Full	21.99	PC3	PASS
N71	15	10	DFT-QPSK	L	Edge_1RB_Right	21.07	PC3	PASS
N71	15	10	CP-QPSK	L	Outer_Full	20.06	PC3	PASS
N71	15	10	CP-QPSK	L	Edge_1RB_Left	20.04	PC3	PASS

N71	15	10	CP-QPSK	L	Inner_Full	20.42	PC3	PASS
N71	15	10	CP-QPSK	L	Edge_1RB_Right	20.13	PC3	PASS
N71	15	10	DFT-QPSK	M	Outer_Full	20.95	PC3	PASS
N71	15	10	DFT-QPSK	M	Edge_1RB_Left	21.01	PC3	PASS
N71	15	10	DFT-QPSK	M	Inner_Full	21.95	PC3	PASS
N71	15	10	DFT-QPSK	M	Edge_1RB_Right	20.90	PC3	PASS
N71	15	10	CP-QPSK	M	Outer_Full	20.02	PC3	PASS
N71	15	10	CP-QPSK	M	Edge_1RB_Left	20.05	PC3	PASS
N71	15	10	CP-QPSK	M	Inner_Full	20.45	PC3	PASS
N71	15	10	CP-QPSK	M	Edge_1RB_Right	20.95	PC3	PASS
N71	15	10	DFT-QPSK	H	Outer_Full	20.91	PC3	PASS
N71	15	10	DFT-QPSK	H	Edge_1RB_Left	20.79	PC3	PASS
N71	15	10	DFT-QPSK	H	Inner_Full	22.00	PC3	PASS
N71	15	10	DFT-QPSK	H	Edge_1RB_Right	20.86	PC3	PASS
N71	15	10	CP-QPSK	H	Outer_Full	20.95	PC3	PASS
N71	15	10	CP-QPSK	H	Edge_1RB_Left	20.91	PC3	PASS
N71	15	10	CP-QPSK	H	Inner_Full	20.38	PC3	PASS
N71	15	10	CP-QPSK	H	Edge_1RB_Right	20.02	PC3	PASS
N71	15	15	DFT-QPSK	L	Outer_Full	21.13	PC3	PASS
N71	15	15	DFT-QPSK	L	Edge_1RB_Left	21.03	PC3	PASS
N71	15	15	DFT-QPSK	L	Inner_Full	22.17	PC3	PASS
N71	15	15	DFT-QPSK	L	Edge_1RB_Right	21.13	PC3	PASS
N71	15	15	CP-QPSK	L	Outer_Full	20.23	PC3	PASS
N71	15	15	CP-QPSK	L	Edge_1RB_Left	20.13	PC3	PASS
N71	15	15	CP-QPSK	L	Inner_Full	20.66	PC3	PASS
N71	15	15	CP-QPSK	L	Edge_1RB_Right	20.30	PC3	PASS
N71	15	15	DFT-QPSK	M	Outer_Full	21.16	PC3	PASS
N71	15	15	DFT-QPSK	M	Edge_1RB_Left	20.98	PC3	PASS
N71	15	15	DFT-QPSK	M	Inner_Full	22.13	PC3	PASS
N71	15	15	DFT-QPSK	M	Edge_1RB_Right	20.86	PC3	PASS
N71	15	15	CP-QPSK	M	Outer_Full	20.18	PC3	PASS
N71	15	15	CP-QPSK	M	Edge_1RB_Left	20.33	PC3	PASS
N71	15	15	CP-QPSK	M	Inner_Full	20.58	PC3	PASS
N71	15	15	CP-QPSK	M	Edge_1RB_Right	20.11	PC3	PASS
N71	15	15	DFT-QPSK	H	Outer_Full	21.10	PC3	PASS
N71	15	15	DFT-QPSK	H	Edge_1RB_Left	20.84	PC3	PASS
N71	15	15	DFT-QPSK	H	Inner_Full	22.12	PC3	PASS
N71	15	15	DFT-QPSK	H	Edge_1RB_Right	21.00	PC3	PASS
N71	15	15	CP-QPSK	H	Outer_Full	20.17	PC3	PASS
N71	15	15	CP-QPSK	H	Edge_1RB_Left	20.03	PC3	PASS
N71	15	15	CP-QPSK	H	Inner_Full	20.59	PC3	PASS
N71	15	15	CP-QPSK	H	Edge_1RB_Right	20.19	PC3	PASS

N71	15	20	DFT-QPSK	L	Outer_Full	21.07	PC3	PASS
N71	15	20	DFT-QPSK	L	Edge_1RB_Left	21.10	PC3	PASS
N71	15	20	DFT-QPSK	L	Inner_Full	22.16	PC3	PASS
N71	15	20	DFT-QPSK	L	Edge_1RB_Right	21.05	PC3	PASS
N71	15	20	CP-QPSK	L	Outer_Full	20.13	PC3	PASS
N71	15	20	CP-QPSK	L	Edge_1RB_Left	20.11	PC3	PASS
N71	15	20	CP-QPSK	L	Inner_Full	20.64	PC3	PASS
N71	15	20	CP-QPSK	L	Edge_1RB_Right	20.10	PC3	PASS
N71	15	20	DFT-QPSK	M	Outer_Full	21.09	PC3	PASS
N71	15	20	DFT-QPSK	M	Edge_1RB_Left	20.93	PC3	PASS
N71	15	20	DFT-QPSK	M	Inner_Full	22.23	PC3	PASS
N71	15	20	DFT-QPSK	M	Edge_1RB_Right	20.92	PC3	PASS
N71	15	20	CP-QPSK	M	Outer_Full	20.17	PC3	PASS
N71	15	20	CP-QPSK	M	Edge_1RB_Left	20.07	PC3	PASS
N71	15	20	CP-QPSK	M	Inner_Full	20.65	PC3	PASS
N71	15	20	CP-QPSK	M	Edge_1RB_Right	20.03	PC3	PASS
N71	15	20	DFT-QPSK	H	Outer_Full	21.07	PC3	PASS
N71	15	20	DFT-QPSK	H	Edge_1RB_Left	21.11	PC3	PASS
N71	15	20	DFT-QPSK	H	Inner_Full	22.13	PC3	PASS
N71	15	20	DFT-QPSK	H	Edge_1RB_Right	20.99	PC3	PASS
N71	15	20	CP-QPSK	H	Outer_Full	20.18	PC3	PASS
N71	15	20	CP-QPSK	H	Edge_1RB_Left	20.04	PC3	PASS
N71	15	20	CP-QPSK	H	Inner_Full	20.56	PC3	PASS
N71	15	20	CP-QPSK	H	Edge_1RB_Right	20.04	PC3	PASS

N77_3450-3550MHz**5G NR(P1):**

Band	SCS	Bandwidth	Modulation	Channel	RB Config	Power (dBm)	Power Class	Verdict
N77-3450-3550	30	10	DFT-QPSK	L	Outer_Full	24.39	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	L	Edge_1RB_Left	22.03	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	L	Inner_Full	25.42	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	L	Edge_1RB_Right	21.92	PC2	PASS
N77-3450-3550	30	10	CP-QPSK	L	Outer_Full	22.43	PC2	PASS
N77-3450-3550	30	10	CP-QPSK	L	Edge_1RB_Left	22.02	PC2	PASS
N77-3450-3550	30	10	CP-QPSK	L	Inner_Full	23.88	PC2	PASS
N77-3450-3550	30	10	CP-QPSK	L	Edge_1RB_Right	21.91	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	M	Outer_Full	24.46	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	M	Edge_1RB_Left	22.18	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	M	Inner_Full	25.50	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	M	Edge_1RB_Right	22.15	PC2	PASS

N77-3450-3550	30	10	CP-QPSK	M	Outer_Full	22.43	PC2	PASS
N77-3450-3550	30	10	CP-QPSK	M	Edge_1RB_Left	22.19	PC2	PASS
N77-3450-3550	30	10	CP-QPSK	M	Inner_Full	24.01	PC2	PASS
N77-3450-3550	30	10	CP-QPSK	M	Edge_1RB_Right	22.08	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	H	Outer_Full	24.23	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	H	Edge_1RB_Left	21.79	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	H	Inner_Full	25.24	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	H	Edge_1RB_Right	21.90	PC2	PASS
N77-3450-3550	30	10	CP-QPSK	H	Outer_Full	22.31	PC2	PASS
N77-3450-3550	30	10	CP-QPSK	H	Edge_1RB_Left	21.91	PC2	PASS
N77-3450-3550	30	10	CP-QPSK	H	Inner_Full	23.79	PC2	PASS
N77-3450-3550	30	10	CP-QPSK	H	Edge_1RB_Right	21.94	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	L	Outer_Full	24.39	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	L	Edge_1RB_Left	21.98	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	L	Inner_Full	25.37	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	L	Edge_1RB_Right	21.82	PC2	PASS
N77-3450-3550	30	15	CP-QPSK	L	Outer_Full	22.33	PC2	PASS
N77-3450-3550	30	15	CP-QPSK	L	Edge_1RB_Left	21.84	PC2	PASS
N77-3450-3550	30	15	CP-QPSK	L	Inner_Full	23.83	PC2	PASS
N77-3450-3550	30	15	CP-QPSK	L	Edge_1RB_Right	21.79	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	M	Outer_Full	24.49	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	M	Edge_1RB_Left	22.07	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	M	Inner_Full	25.43	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	M	Edge_1RB_Right	21.88	PC2	PASS
N77-3450-3550	30	15	CP-QPSK	M	Outer_Full	22.49	PC2	PASS
N77-3450-3550	30	15	CP-QPSK	M	Edge_1RB_Left	22.02	PC2	PASS
N77-3450-3550	30	15	CP-QPSK	M	Inner_Full	23.90	PC2	PASS
N77-3450-3550	30	15	CP-QPSK	M	Edge_1RB_Right	21.90	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	H	Outer_Full	24.27	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	H	Edge_1RB_Left	21.74	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	H	Inner_Full	25.25	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	H	Edge_1RB_Right	21.75	PC2	PASS
N77-3450-3550	30	15	CP-QPSK	H	Outer_Full	22.15	PC2	PASS
N77-3450-3550	30	15	CP-QPSK	H	Edge_1RB_Left	21.71	PC2	PASS
N77-3450-3550	30	15	CP-QPSK	H	Inner_Full	23.76	PC2	PASS
N77-3450-3550	30	15	CP-QPSK	H	Edge_1RB_Right	21.75	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	L	Outer_Full	24.33	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	L	Edge_1RB_Left	21.95	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	L	Inner_Full	25.34	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	L	Edge_1RB_Right	21.78	PC2	PASS
N77-3450-3550	30	20	CP-QPSK	L	Outer_Full	22.34	PC2	PASS
N77-3450-3550	30	20	CP-QPSK	L	Edge_1RB_Left	21.95	PC2	PASS

N77-3450-3550	30	20	CP-QPSK	L	Inner_Full	23.84	PC2	PASS
N77-3450-3550	30	20	CP-QPSK	L	Edge_1RB_Right	21.87	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	M	Outer_Full	24.44	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	M	Edge_1RB_Left	22.13	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	M	Inner_Full	25.50	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	M	Edge_1RB_Right	21.95	PC2	PASS
N77-3450-3550	30	20	CP-QPSK	M	Outer_Full	22.39	PC2	PASS
N77-3450-3550	30	20	CP-QPSK	M	Edge_1RB_Left	22.05	PC2	PASS
N77-3450-3550	30	20	CP-QPSK	M	Inner_Full	23.93	PC2	PASS
N77-3450-3550	30	20	CP-QPSK	M	Edge_1RB_Right	21.91	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	H	Outer_Full	24.17	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	H	Edge_1RB_Left	21.81	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	H	Inner_Full	25.22	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	H	Edge_1RB_Right	21.69	PC2	PASS
N77-3450-3550	30	20	CP-QPSK	H	Outer_Full	22.22	PC2	PASS
N77-3450-3550	30	20	CP-QPSK	H	Edge_1RB_Left	21.93	PC2	PASS
N77-3450-3550	30	20	CP-QPSK	H	Inner_Full	23.68	PC2	PASS
N77-3450-3550	30	20	CP-QPSK	H	Edge_1RB_Right	21.77	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	L	Outer_Full	24.39	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	L	Edge_1RB_Left	21.64	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	L	Inner_Full	25.39	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	L	Edge_1RB_Right	21.77	PC2	PASS
N77-3450-3550	30	40	CP-QPSK	L	Outer_Full	22.35	PC2	PASS
N77-3450-3550	30	40	CP-QPSK	L	Edge_1RB_Left	21.70	PC2	PASS
N77-3450-3550	30	40	CP-QPSK	L	Inner_Full	23.87	PC2	PASS
N77-3450-3550	30	40	CP-QPSK	L	Edge_1RB_Right	21.77	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	M	Outer_Full	24.53	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	M	Edge_1RB_Left	21.99	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	M	Inner_Full	25.44	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	M	Edge_1RB_Right	21.80	PC2	PASS
N77-3450-3550	30	40	CP-QPSK	M	Outer_Full	22.49	PC2	PASS
N77-3450-3550	30	40	CP-QPSK	M	Edge_1RB_Left	21.94	PC2	PASS
N77-3450-3550	30	40	CP-QPSK	M	Inner_Full	23.93	PC2	PASS
N77-3450-3550	30	40	CP-QPSK	M	Edge_1RB_Right	21.79	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	H	Outer_Full	24.31	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	H	Edge_1RB_Left	21.50	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	H	Inner_Full	25.33	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	H	Edge_1RB_Right	21.44	PC2	PASS
N77-3450-3550	30	40	CP-QPSK	H	Outer_Full	22.21	PC2	PASS
N77-3450-3550	30	40	CP-QPSK	H	Edge_1RB_Left	21.61	PC2	PASS
N77-3450-3550	30	40	CP-QPSK	H	Inner_Full	23.81	PC2	PASS
N77-3450-3550	30	40	CP-QPSK	H	Edge_1RB_Right	21.38	PC2	PASS

N77-3450-3550	30	50	DFT-QPSK	L	Outer_Full	24.53	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	L	Edge_1RB_Left	21.82	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	L	Inner_Full	25.62	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	L	Edge_1RB_Right	21.68	PC2	PASS
N77-3450-3550	30	50	CP-QPSK	L	Outer_Full	22.48	PC2	PASS
N77-3450-3550	30	50	CP-QPSK	L	Edge_1RB_Left	21.73	PC2	PASS
N77-3450-3550	30	50	CP-QPSK	L	Inner_Full	24.09	PC2	PASS
N77-3450-3550	30	50	CP-QPSK	L	Edge_1RB_Right	21.74	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	M	Outer_Full	24.59	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	M	Edge_1RB_Left	21.99	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	M	Inner_Full	25.55	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	M	Edge_1RB_Right	21.90	PC2	PASS
N77-3450-3550	30	50	CP-QPSK	M	Outer_Full	22.54	PC2	PASS
N77-3450-3550	30	50	CP-QPSK	M	Edge_1RB_Left	21.87	PC2	PASS
N77-3450-3550	30	50	CP-QPSK	M	Inner_Full	24.11	PC2	PASS
N77-3450-3550	30	50	CP-QPSK	M	Edge_1RB_Right	21.92	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	H	Outer_Full	24.35	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	H	Edge_1RB_Left	21.57	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	H	Inner_Full	25.46	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	H	Edge_1RB_Right	21.54	PC2	PASS
N77-3450-3550	30	50	CP-QPSK	H	Outer_Full	22.34	PC2	PASS
N77-3450-3550	30	50	CP-QPSK	H	Edge_1RB_Left	21.57	PC2	PASS
N77-3450-3550	30	50	CP-QPSK	H	Inner_Full	23.94	PC2	PASS
N77-3450-3550	30	50	CP-QPSK	H	Edge_1RB_Right	21.47	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	L	Outer_Full	24.45	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	L	Edge_1RB_Left	21.60	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	L	Inner_Full	25.55	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	L	Edge_1RB_Right	21.64	PC2	PASS
N77-3450-3550	30	60	CP-QPSK	L	Outer_Full	22.43	PC2	PASS
N77-3450-3550	30	60	CP-QPSK	L	Edge_1RB_Left	21.66	PC2	PASS
N77-3450-3550	30	60	CP-QPSK	L	Inner_Full	24.06	PC2	PASS
N77-3450-3550	30	60	CP-QPSK	L	Edge_1RB_Right	21.67	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	M	Outer_Full	24.52	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	M	Edge_1RB_Left	21.75	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	M	Inner_Full	25.53	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	M	Edge_1RB_Right	21.69	PC2	PASS
N77-3450-3550	30	60	CP-QPSK	M	Outer_Full	22.54	PC2	PASS
N77-3450-3550	30	60	CP-QPSK	M	Edge_1RB_Left	21.67	PC2	PASS
N77-3450-3550	30	60	CP-QPSK	M	Inner_Full	24.00	PC2	PASS
N77-3450-3550	30	60	CP-QPSK	M	Edge_1RB_Right	21.66	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	H	Outer_Full	24.39	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	H	Edge_1RB_Left	21.72	PC2	PASS

N77-3450-3550	30	60	DFT-QPSK	H	Inner_Full	25.46	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	H	Edge_1RB_Right	21.50	PC2	PASS
N77-3450-3550	30	60	CP-QPSK	H	Outer_Full	22.33	PC2	PASS
N77-3450-3550	30	60	CP-QPSK	H	Edge_1RB_Left	21.65	PC2	PASS
N77-3450-3550	30	60	CP-QPSK	H	Inner_Full	23.90	PC2	PASS
N77-3450-3550	30	60	CP-QPSK	H	Edge_1RB_Right	21.42	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	L	Outer_Full	24.54	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	L	Edge_1RB_Left	21.45	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	L	Inner_Full	25.65	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	L	Edge_1RB_Right	21.43	PC2	PASS
N77-3450-3550	30	80	CP-QPSK	L	Outer_Full	22.43	PC2	PASS
N77-3450-3550	30	80	CP-QPSK	L	Edge_1RB_Left	21.47	PC2	PASS
N77-3450-3550	30	80	CP-QPSK	L	Inner_Full	24.11	PC2	PASS
N77-3450-3550	30	80	CP-QPSK	L	Edge_1RB_Right	21.42	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	M	Outer_Full	24.47	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	M	Edge_1RB_Left	21.30	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	M	Inner_Full	25.65	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	M	Edge_1RB_Right	21.23	PC2	PASS
N77-3450-3550	30	80	CP-QPSK	M	Outer_Full	22.39	PC2	PASS
N77-3450-3550	30	80	CP-QPSK	M	Edge_1RB_Left	21.18	PC2	PASS
N77-3450-3550	30	80	CP-QPSK	M	Inner_Full	24.10	PC2	PASS
N77-3450-3550	30	80	CP-QPSK	M	Edge_1RB_Right	21.23	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	H	Outer_Full	24.48	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	H	Edge_1RB_Left	21.53	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	H	Inner_Full	25.62	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	H	Edge_1RB_Right	21.42	PC2	PASS
N77-3450-3550	30	80	CP-QPSK	H	Outer_Full	22.42	PC2	PASS
N77-3450-3550	30	80	CP-QPSK	H	Edge_1RB_Left	21.85	PC2	PASS
N77-3450-3550	30	80	CP-QPSK	H	Inner_Full	24.03	PC2	PASS
N77-3450-3550	30	80	CP-QPSK	H	Edge_1RB_Right	21.64	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	L	Outer_Full	24.35	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	L	Edge_1RB_Left	21.13	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	L	Inner_Full	25.54	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	L	Edge_1RB_Right	20.88	PC2	PASS
N77-3450-3550	30	90	CP-QPSK	L	Outer_Full	22.34	PC2	PASS
N77-3450-3550	30	90	CP-QPSK	L	Edge_1RB_Left	21.37	PC2	PASS
N77-3450-3550	30	90	CP-QPSK	L	Inner_Full	24.03	PC2	PASS
N77-3450-3550	30	90	CP-QPSK	L	Edge_1RB_Right	21.13	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	M	Outer_Full	24.41	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	M	Edge_1RB_Left	21.29	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	M	Inner_Full	25.61	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	M	Edge_1RB_Right	21.15	PC2	PASS

N77-3450-3550	30	90	CP-QPSK	M	Outer_Full	22.39	PC2	PASS
N77-3450-3550	30	90	CP-QPSK	M	Edge_1RB_Left	21.24	PC2	PASS
N77-3450-3550	30	90	CP-QPSK	M	Inner_Full	24.12	PC2	PASS
N77-3450-3550	30	90	CP-QPSK	M	Edge_1RB_Right	21.14	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	H	Outer_Full	24.37	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	H	Edge_1RB_Left	21.01	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	H	Inner_Full	25.59	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	H	Edge_1RB_Right	21.07	PC2	PASS
N77-3450-3550	30	90	CP-QPSK	H	Outer_Full	22.37	PC2	PASS
N77-3450-3550	30	90	CP-QPSK	H	Edge_1RB_Left	21.14	PC2	PASS
N77-3450-3550	30	90	CP-QPSK	H	Inner_Full	24.06	PC2	PASS
N77-3450-3550	30	90	CP-QPSK	H	Edge_1RB_Right	21.04	PC2	PASS
N77-3450-3550	30	100	DFT-QPSK	M	Outer_Full	24.14	PC2	PASS
N77-3450-3550	30	100	DFT-QPSK	M	Edge_1RB_Left	20.90	PC2	PASS
N77-3450-3550	30	100	DFT-QPSK	M	Inner_Full	25.65	PC2	PASS
N77-3450-3550	30	100	DFT-QPSK	M	Edge_1RB_Right	20.72	PC2	PASS
N77-3450-3550	30	100	CP-QPSK	M	Outer_Full	22.19	PC2	PASS
N77-3450-3550	30	100	CP-QPSK	M	Edge_1RB_Left	20.98	PC2	PASS
N77-3450-3550	30	100	CP-QPSK	M	Inner_Full	23.92	PC2	PASS
N77-3450-3550	30	100	CP-QPSK	M	Edge_1RB_Right	20.64	PC2	PASS

5G NR(P4): Sensor ON

Band	SCS	Bandwidth	Modulation	Channel	RB Config	Power (dBm)	Power Class	Verdict
N77-3450-3550	30	10	DFT-QPSK	L	Outer_Full	16.45	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	L	Edge_1RB_Left	16.71	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	L	Inner_Full	17.13	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	L	Edge_1RB_Right	17.27	PC2	PASS
N77-3450-3550	30	10	CP-QPSK	L	Outer_Full	16.16	PC2	PASS
N77-3450-3550	30	10	CP-QPSK	L	Edge_1RB_Left	16.58	PC2	PASS
N77-3450-3550	30	10	CP-QPSK	L	Inner_Full	16.69	PC2	PASS
N77-3450-3550	30	10	CP-QPSK	L	Edge_1RB_Right	17.24	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	M	Outer_Full	16.46	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	M	Edge_1RB_Left	16.48	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	M	Inner_Full	16.89	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	M	Edge_1RB_Right	17.16	PC2	PASS
N77-3450-3550	30	10	CP-QPSK	M	Outer_Full	17.24	PC2	PASS
N77-3450-3550	30	10	CP-QPSK	M	Edge_1RB_Left	16.94	PC2	PASS
N77-3450-3550	30	10	CP-QPSK	M	Inner_Full	16.71	PC2	PASS
N77-3450-3550	30	10	CP-QPSK	M	Edge_1RB_Right	14.99	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	H	Outer_Full	16.89	PC2	PASS

N77-3450-3550	30	10	DFT-QPSK	H	Edge_1RB_Left	17.20	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	H	Inner_Full	16.58	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	H	Edge_1RB_Right	16.45	PC2	PASS
N77-3450-3550	30	10	CP-QPSK	H	Outer_Full	17.21	PC2	PASS
N77-3450-3550	30	10	CP-QPSK	H	Edge_1RB_Left	17.18	PC2	PASS
N77-3450-3550	30	10	CP-QPSK	H	Inner_Full	16.69	PC2	PASS
N77-3450-3550	30	10	CP-QPSK	H	Edge_1RB_Right	17.06	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	L	Outer_Full	16.35	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	L	Edge_1RB_Left	17.07	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	L	Inner_Full	16.75	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	L	Edge_1RB_Right	17.19	PC2	PASS
N77-3450-3550	30	15	CP-QPSK	L	Outer_Full	16.34	PC2	PASS
N77-3450-3550	30	15	CP-QPSK	L	Edge_1RB_Left	16.34	PC2	PASS
N77-3450-3550	30	15	CP-QPSK	L	Inner_Full	17.25	PC2	PASS
N77-3450-3550	30	15	CP-QPSK	L	Edge_1RB_Right	17.16	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	M	Outer_Full	16.82	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	M	Edge_1RB_Left	16.85	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	M	Inner_Full	16.36	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	M	Edge_1RB_Right	17.11	PC2	PASS
N77-3450-3550	30	15	CP-QPSK	M	Outer_Full	16.28	PC2	PASS
N77-3450-3550	30	15	CP-QPSK	M	Edge_1RB_Left	17.23	PC2	PASS
N77-3450-3550	30	15	CP-QPSK	M	Inner_Full	16.76	PC2	PASS
N77-3450-3550	30	15	CP-QPSK	M	Edge_1RB_Right	16.94	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	H	Outer_Full	16.69	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	H	Edge_1RB_Left	17.24	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	H	Inner_Full	16.37	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	H	Edge_1RB_Right	16.85	PC2	PASS
N77-3450-3550	30	15	CP-QPSK	H	Outer_Full	17.01	PC2	PASS
N77-3450-3550	30	15	CP-QPSK	H	Edge_1RB_Left	16.56	PC2	PASS
N77-3450-3550	30	15	CP-QPSK	H	Inner_Full	16.95	PC2	PASS
N77-3450-3550	30	15	CP-QPSK	H	Edge_1RB_Right	16.74	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	L	Outer_Full	16.24	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	L	Edge_1RB_Left	16.82	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	L	Inner_Full	17.07	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	L	Edge_1RB_Right	16.46	PC2	PASS
N77-3450-3550	30	20	CP-QPSK	L	Outer_Full	16.36	PC2	PASS
N77-3450-3550	30	20	CP-QPSK	L	Edge_1RB_Left	16.66	PC2	PASS
N77-3450-3550	30	20	CP-QPSK	L	Inner_Full	17.27	PC2	PASS
N77-3450-3550	30	20	CP-QPSK	L	Edge_1RB_Right	16.24	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	M	Outer_Full	16.82	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	M	Edge_1RB_Left	16.91	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	M	Inner_Full	16.49	PC2	PASS

N77-3450-3550	30	20	DFT-QPSK	M	Edge_1RB_Right	16.82	PC2	PASS
N77-3450-3550	30	20	CP-QPSK	M	Outer_Full	16.84	PC2	PASS
N77-3450-3550	30	20	CP-QPSK	M	Edge_1RB_Left	16.55	PC2	PASS
N77-3450-3550	30	20	CP-QPSK	M	Inner_Full	17.15	PC2	PASS
N77-3450-3550	30	20	CP-QPSK	M	Edge_1RB_Right	16.38	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	H	Outer_Full	16.38	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	H	Edge_1RB_Left	17.01	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	H	Inner_Full	16.94	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	H	Edge_1RB_Right	17.00	PC2	PASS
N77-3450-3550	30	20	CP-QPSK	H	Outer_Full	17.14	PC2	PASS
N77-3450-3550	30	20	CP-QPSK	H	Edge_1RB_Left	16.95	PC2	PASS
N77-3450-3550	30	20	CP-QPSK	H	Inner_Full	17.00	PC2	PASS
N77-3450-3550	30	20	CP-QPSK	H	Edge_1RB_Right	16.82	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	L	Outer_Full	17.01	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	L	Edge_1RB_Left	16.16	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	L	Inner_Full	17.20	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	L	Edge_1RB_Right	16.87	PC2	PASS
N77-3450-3550	30	40	CP-QPSK	L	Outer_Full	16.42	PC2	PASS
N77-3450-3550	30	40	CP-QPSK	L	Edge_1RB_Left	17.04	PC2	PASS
N77-3450-3550	30	40	CP-QPSK	L	Inner_Full	16.91	PC2	PASS
N77-3450-3550	30	40	CP-QPSK	L	Edge_1RB_Right	16.68	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	M	Outer_Full	17.19	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	M	Edge_1RB_Left	16.32	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	M	Inner_Full	16.27	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	M	Edge_1RB_Right	16.94	PC2	PASS
N77-3450-3550	30	40	CP-QPSK	M	Outer_Full	16.82	PC2	PASS
N77-3450-3550	30	40	CP-QPSK	M	Edge_1RB_Left	17.23	PC2	PASS
N77-3450-3550	30	40	CP-QPSK	M	Inner_Full	17.06	PC2	PASS
N77-3450-3550	30	40	CP-QPSK	M	Edge_1RB_Right	16.97	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	H	Outer_Full	16.89	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	H	Edge_1RB_Left	16.84	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	H	Inner_Full	17.22	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	H	Edge_1RB_Right	16.81	PC2	PASS
N77-3450-3550	30	40	CP-QPSK	H	Outer_Full	16.68	PC2	PASS
N77-3450-3550	30	40	CP-QPSK	H	Edge_1RB_Left	17.22	PC2	PASS
N77-3450-3550	30	40	CP-QPSK	H	Inner_Full	16.58	PC2	PASS
N77-3450-3550	30	40	CP-QPSK	H	Edge_1RB_Right	16.40	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	L	Outer_Full	17.24	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	L	Edge_1RB_Left	16.75	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	L	Inner_Full	16.88	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	L	Edge_1RB_Right	17.06	PC2	PASS
N77-3450-3550	30	50	CP-QPSK	L	Outer_Full	16.97	PC2	PASS

N77-3450-3550	30	50	CP-QPSK	L	Edge_1RB_Left	17.19	PC2	PASS
N77-3450-3550	30	50	CP-QPSK	L	Inner_Full	16.84	PC2	PASS
N77-3450-3550	30	50	CP-QPSK	L	Edge_1RB_Right	17.22	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	M	Outer_Full	16.76	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	M	Edge_1RB_Left	17.24	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	M	Inner_Full	16.64	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	M	Edge_1RB_Right	16.28	PC2	PASS
N77-3450-3550	30	50	CP-QPSK	M	Outer_Full	17.12	PC2	PASS
N77-3450-3550	30	50	CP-QPSK	M	Edge_1RB_Left	17.23	PC2	PASS
N77-3450-3550	30	50	CP-QPSK	M	Inner_Full	16.72	PC2	PASS
N77-3450-3550	30	50	CP-QPSK	M	Edge_1RB_Right	16.57	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	H	Outer_Full	17.23	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	H	Edge_1RB_Left	16.88	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	H	Inner_Full	17.18	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	H	Edge_1RB_Right	17.05	PC2	PASS
N77-3450-3550	30	50	CP-QPSK	H	Outer_Full	16.47	PC2	PASS
N77-3450-3550	30	50	CP-QPSK	H	Edge_1RB_Left	17.07	PC2	PASS
N77-3450-3550	30	50	CP-QPSK	H	Inner_Full	16.82	PC2	PASS
N77-3450-3550	30	50	CP-QPSK	H	Edge_1RB_Right	16.94	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	L	Outer_Full	16.76	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	L	Edge_1RB_Left	17.15	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	L	Inner_Full	16.87	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	L	Edge_1RB_Right	16.47	PC2	PASS
N77-3450-3550	30	60	CP-QPSK	L	Outer_Full	17.00	PC2	PASS
N77-3450-3550	30	60	CP-QPSK	L	Edge_1RB_Left	17.24	PC2	PASS
N77-3450-3550	30	60	CP-QPSK	L	Inner_Full	16.52	PC2	PASS
N77-3450-3550	30	60	CP-QPSK	L	Edge_1RB_Right	16.49	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	M	Outer_Full	16.57	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	M	Edge_1RB_Left	17.08	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	M	Inner_Full	16.81	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	M	Edge_1RB_Right	16.49	PC2	PASS
N77-3450-3550	30	60	CP-QPSK	M	Outer_Full	17.07	PC2	PASS
N77-3450-3550	30	60	CP-QPSK	M	Edge_1RB_Left	16.95	PC2	PASS
N77-3450-3550	30	60	CP-QPSK	M	Inner_Full	17.12	PC2	PASS
N77-3450-3550	30	60	CP-QPSK	M	Edge_1RB_Right	16.82	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	H	Outer_Full	17.16	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	H	Edge_1RB_Left	16.43	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	H	Inner_Full	17.07	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	H	Edge_1RB_Right	16.76	PC2	PASS
N77-3450-3550	30	60	CP-QPSK	H	Outer_Full	16.66	PC2	PASS
N77-3450-3550	30	60	CP-QPSK	H	Edge_1RB_Left	17.02	PC2	PASS
N77-3450-3550	30	60	CP-QPSK	H	Inner_Full	17.05	PC2	PASS

N77-3450-3550	30	60	CP-QPSK	H	Edge_1RB_Right	16.49	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	L	Outer_Full	16.84	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	L	Edge_1RB_Left	16.69	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	L	Inner_Full	16.91	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	L	Edge_1RB_Right	16.38	PC2	PASS
N77-3450-3550	30	80	CP-QPSK	L	Outer_Full	16.38	PC2	PASS
N77-3450-3550	30	80	CP-QPSK	L	Edge_1RB_Left	17.23	PC2	PASS
N77-3450-3550	30	80	CP-QPSK	L	Inner_Full	16.56	PC2	PASS
N77-3450-3550	30	80	CP-QPSK	L	Edge_1RB_Right	17.00	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	M	Outer_Full	17.15	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	M	Edge_1RB_Left	16.95	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	M	Inner_Full	17.00	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	M	Edge_1RB_Right	16.82	PC2	PASS
N77-3450-3550	30	80	CP-QPSK	M	Outer_Full	17.07	PC2	PASS
N77-3450-3550	30	80	CP-QPSK	M	Edge_1RB_Left	16.49	PC2	PASS
N77-3450-3550	30	80	CP-QPSK	M	Inner_Full	17.12	PC2	PASS
N77-3450-3550	30	80	CP-QPSK	M	Edge_1RB_Right	16.56	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	H	Outer_Full	17.06	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	H	Edge_1RB_Left	17.05	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	H	Inner_Full	16.49	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	H	Edge_1RB_Right	17.16	PC2	PASS
N77-3450-3550	30	80	CP-QPSK	H	Outer_Full	16.57	PC2	PASS
N77-3450-3550	30	80	CP-QPSK	H	Edge_1RB_Left	17.11	PC2	PASS
N77-3450-3550	30	80	CP-QPSK	H	Inner_Full	16.56	PC2	PASS
N77-3450-3550	30	80	CP-QPSK	H	Edge_1RB_Right	17.41	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	L	Outer_Full	16.74	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	L	Edge_1RB_Left	16.65	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	L	Inner_Full	17.24	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	L	Edge_1RB_Right	17.19	PC2	PASS
N77-3450-3550	30	90	CP-QPSK	L	Outer_Full	17.15	PC2	PASS
N77-3450-3550	30	90	CP-QPSK	L	Edge_1RB_Left	16.82	PC2	PASS
N77-3450-3550	30	90	CP-QPSK	L	Inner_Full	17.15	PC2	PASS
N77-3450-3550	30	90	CP-QPSK	L	Edge_1RB_Right	16.71	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	M	Outer_Full	17.24	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	M	Edge_1RB_Left	16.88	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	M	Inner_Full	16.66	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	M	Edge_1RB_Right	17.02	PC2	PASS
N77-3450-3550	30	90	CP-QPSK	M	Outer_Full	17.18	PC2	PASS
N77-3450-3550	30	90	CP-QPSK	M	Edge_1RB_Left	16.82	PC2	PASS
N77-3450-3550	30	90	CP-QPSK	M	Inner_Full	16.58	PC2	PASS
N77-3450-3550	30	90	CP-QPSK	M	Edge_1RB_Right	17.08	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	H	Outer_Full	16.87	PC2	PASS

N77-3450-3550	30	90	DFT-QPSK	H	Edge_1RB_Left	16.77	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	H	Inner_Full	17.02	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	H	Edge_1RB_Right	16.49	PC2	PASS
N77-3450-3550	30	90	CP-QPSK	H	Outer_Full	16.49	PC2	PASS
N77-3450-3550	30	90	CP-QPSK	H	Edge_1RB_Left	16.19	PC2	PASS
N77-3450-3550	30	90	CP-QPSK	H	Inner_Full	16.75	PC2	PASS
N77-3450-3550	30	90	CP-QPSK	H	Edge_1RB_Right	16.73	PC2	PASS
N77-3450-3550	30	100	DFT-QPSK	M	Outer_Full	16.57	PC2	PASS
N77-3450-3550	30	100	DFT-QPSK	M	Edge_1RB_Left	16.61	PC2	PASS
N77-3450-3550	30	100	DFT-QPSK	M	Inner_Full	17.57	PC2	PASS
N77-3450-3550	30	100	DFT-QPSK	M	Edge_1RB_Right	16.38	PC2	PASS
N77-3450-3550	30	100	CP-QPSK	M	Outer_Full	16.46	PC2	PASS
N77-3450-3550	30	100	CP-QPSK	M	Edge_1RB_Left	17.00	PC2	PASS
N77-3450-3550	30	100	CP-QPSK	M	Inner_Full	17.58	PC2	PASS
N77-3450-3550	30	100	CP-QPSK	M	Edge_1RB_Right	17.07	PC2	PASS

5G NR(P2): Receiver ON

Band	SCS	Bandwidth	Modulation	Channel	RB Config	Power (dBm)	Power Class	Verdict
N77-3450-3550	30	10	DFT-QPSK	L	Outer_Full	14.59	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	L	Edge_1RB_Left	15.11	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	L	Inner_Full	14.93	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	L	Edge_1RB_Right	14.45	PC2	PASS
N77-3450-3550	30	10	CP-QPSK	L	Outer_Full	15.14	PC2	PASS
N77-3450-3550	30	10	CP-QPSK	L	Edge_1RB_Left	14.54	PC2	PASS
N77-3450-3550	30	10	CP-QPSK	L	Inner_Full	14.54	PC2	PASS
N77-3450-3550	30	10	CP-QPSK	L	Edge_1RB_Right	14.57	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	M	Outer_Full	14.74	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	M	Edge_1RB_Left	15.18	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	M	Inner_Full	15.00	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	M	Edge_1RB_Right	15.11	PC2	PASS
N77-3450-3550	30	10	CP-QPSK	M	Outer_Full	14.93	PC2	PASS
N77-3450-3550	30	10	CP-QPSK	M	Edge_1RB_Left	14.89	PC2	PASS
N77-3450-3550	30	10	CP-QPSK	M	Inner_Full	15.01	PC2	PASS
N77-3450-3550	30	10	CP-QPSK	M	Edge_1RB_Right	14.74	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	H	Outer_Full	14.73	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	H	Edge_1RB_Left	14.84	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	H	Inner_Full	14.34	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	H	Edge_1RB_Right	15.01	PC2	PASS

N77-3450-3550	30	10	CP-QPSK	H	Outer_Full	15.02	PC2	PASS
N77-3450-3550	30	10	CP-QPSK	H	Edge_1RB_Left	15.21	PC2	PASS
N77-3450-3550	30	10	CP-QPSK	H	Inner_Full	14.99	PC2	PASS
N77-3450-3550	30	10	CP-QPSK	H	Edge_1RB_Right	15.08	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	L	Outer_Full	14.82	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	L	Edge_1RB_Left	15.16	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	L	Inner_Full	15.04	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	L	Edge_1RB_Right	14.47	PC2	PASS
N77-3450-3550	30	15	CP-QPSK	L	Outer_Full	14.44	PC2	PASS
N77-3450-3550	30	15	CP-QPSK	L	Edge_1RB_Left	14.69	PC2	PASS
N77-3450-3550	30	15	CP-QPSK	L	Inner_Full	14.99	PC2	PASS
N77-3450-3550	30	15	CP-QPSK	L	Edge_1RB_Right	15.02	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	M	Outer_Full	14.64	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	M	Edge_1RB_Left	14.67	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	M	Inner_Full	14.69	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	M	Edge_1RB_Right	14.84	PC2	PASS
N77-3450-3550	30	15	CP-QPSK	M	Outer_Full	14.27	PC2	PASS
N77-3450-3550	30	15	CP-QPSK	M	Edge_1RB_Left	15.05	PC2	PASS
N77-3450-3550	30	15	CP-QPSK	M	Inner_Full	14.78	PC2	PASS
N77-3450-3550	30	15	CP-QPSK	M	Edge_1RB_Right	15.21	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	H	Outer_Full	14.78	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	H	Edge_1RB_Left	14.54	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	H	Inner_Full	14.73	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	H	Edge_1RB_Right	14.74	PC2	PASS
N77-3450-3550	30	15	CP-QPSK	H	Outer_Full	14.73	PC2	PASS
N77-3450-3550	30	15	CP-QPSK	H	Edge_1RB_Left	14.54	PC2	PASS
N77-3450-3550	30	15	CP-QPSK	H	Inner_Full	15.13	PC2	PASS
N77-3450-3550	30	15	CP-QPSK	H	Edge_1RB_Right	15.0	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	L	Outer_Full	14.94	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	L	Edge_1RB_Left	14.65	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	L	Inner_Full	14.82	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	L	Edge_1RB_Right	14.71	PC2	PASS
N77-3450-3550	30	20	CP-QPSK	L	Outer_Full	14.79	PC2	PASS
N77-3450-3550	30	20	CP-QPSK	L	Edge_1RB_Left	14.80	PC2	PASS
N77-3450-3550	30	20	CP-QPSK	L	Inner_Full	14.41	PC2	PASS
N77-3450-3550	30	20	CP-QPSK	L	Edge_1RB_Right	15.05	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	M	Outer_Full	15.11	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	M	Edge_1RB_Left	15.00	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	M	Inner_Full	15.31	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	M	Edge_1RB_Right	15.27	PC2	PASS
N77-3450-3550	30	20	CP-QPSK	M	Outer_Full	15.40	PC2	PASS
N77-3450-3550	30	20	CP-QPSK	M	Edge_1RB_Left	15.02	PC2	PASS

N77-3450-3550	30	20	CP-QPSK	M	Inner_Full	15.15	PC2	PASS
N77-3450-3550	30	20	CP-QPSK	M	Edge_1RB_Right	15.10	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	H	Outer_Full	14.88	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	H	Edge_1RB_Left	14.87	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	H	Inner_Full	14.42	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	H	Edge_1RB_Right	14.92	PC2	PASS
N77-3450-3550	30	20	CP-QPSK	H	Outer_Full	15.02	PC2	PASS
N77-3450-3550	30	20	CP-QPSK	H	Edge_1RB_Left	14.65	PC2	PASS
N77-3450-3550	30	20	CP-QPSK	H	Inner_Full	14.99	PC2	PASS
N77-3450-3550	30	20	CP-QPSK	H	Edge_1RB_Right	14.51	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	L	Outer_Full	14.31	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	L	Edge_1RB_Left	14.78	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	L	Inner_Full	15101	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	L	Edge_1RB_Right	14.54	PC2	PASS
N77-3450-3550	30	40	CP-QPSK	L	Outer_Full	14.54	PC2	PASS
N77-3450-3550	30	40	CP-QPSK	L	Edge_1RB_Left	14.73	PC2	PASS
N77-3450-3550	30	40	CP-QPSK	L	Inner_Full	14.23	PC2	PASS
N77-3450-3550	30	40	CP-QPSK	L	Edge_1RB_Right	14.88	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	M	Outer_Full	14.54	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	M	Edge_1RB_Left	15.13	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	M	Inner_Full	15.0	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	M	Edge_1RB_Right	14.94	PC2	PASS
N77-3450-3550	30	40	CP-QPSK	M	Outer_Full	14.78	PC2	PASS
N77-3450-3550	30	40	CP-QPSK	M	Edge_1RB_Left	14.47	PC2	PASS
N77-3450-3550	30	40	CP-QPSK	M	Inner_Full	14.59	PC2	PASS
N77-3450-3550	30	40	CP-QPSK	M	Edge_1RB_Right	14.83	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	H	Outer_Full	14.45	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	H	Edge_1RB_Left	14.85	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	H	Inner_Full	15.15	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	H	Edge_1RB_Right	15.12	PC2	PASS
N77-3450-3550	30	40	CP-QPSK	H	Outer_Full	15.07	PC2	PASS
N77-3450-3550	30	40	CP-QPSK	H	Edge_1RB_Left	14.87	PC2	PASS
N77-3450-3550	30	40	CP-QPSK	H	Inner_Full	14.35	PC2	PASS
N77-3450-3550	30	40	CP-QPSK	H	Edge_1RB_Right	14.65	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	L	Outer_Full	14.63	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	L	Edge_1RB_Left	14.67	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	L	Inner_Full	14.54	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	L	Edge_1RB_Right	15.03	PC2	PASS
N77-3450-3550	30	50	CP-QPSK	L	Outer_Full	15.07	PC2	PASS
N77-3450-3550	30	50	CP-QPSK	L	Edge_1RB_Left	14.94	PC2	PASS
N77-3450-3550	30	50	CP-QPSK	L	Inner_Full	15.12	PC2	PASS
N77-3450-3550	30	50	CP-QPSK	L	Edge_1RB_Right	14.97	PC2	PASS

N77-3450-3550	30	50	DFT-QPSK	M	Outer_Full	14.74	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	M	Edge_1RB_Left	14.54	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	M	Inner_Full	15.13	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	M	Edge_1RB_Right	15.02	PC2	PASS
N77-3450-3550	30	50	CP-QPSK	M	Outer_Full	14.72	PC2	PASS
N77-3450-3550	30	50	CP-QPSK	M	Edge_1RB_Left	15.48	PC2	PASS
N77-3450-3550	30	50	CP-QPSK	M	Inner_Full	14.73	PC2	PASS
N77-3450-3550	30	50	CP-QPSK	M	Edge_1RB_Right	15.03	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	H	Outer_Full	14.78	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	H	Edge_1RB_Left	14.47	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	H	Inner_Full	14.59	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	H	Edge_1RB_Right	14.49	PC2	PASS
N77-3450-3550	30	50	CP-QPSK	H	Outer_Full	14.48	PC2	PASS
N77-3450-3550	30	50	CP-QPSK	H	Edge_1RB_Left	14.63	PC2	PASS
N77-3450-3550	30	50	CP-QPSK	H	Inner_Full	14.48	PC2	PASS
N77-3450-3550	30	50	CP-QPSK	H	Edge_1RB_Right	14.42	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	L	Outer_Full	15.00	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	L	Edge_1RB_Left	15.01	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	L	Inner_Full	14.66	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	L	Edge_1RB_Right	14.77	PC2	PASS
N77-3450-3550	30	60	CP-QPSK	L	Outer_Full	15.11	PC2	PASS
N77-3450-3550	30	60	CP-QPSK	L	Edge_1RB_Left	15.10	PC2	PASS
N77-3450-3550	30	60	CP-QPSK	L	Inner_Full	15.25	PC2	PASS
N77-3450-3550	30	60	CP-QPSK	L	Edge_1RB_Right	15.04	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	M	Outer_Full	14.98	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	M	Edge_1RB_Left	14.66	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	M	Inner_Full	14.68	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	M	Edge_1RB_Right	14.12	PC2	PASS
N77-3450-3550	30	60	CP-QPSK	M	Outer_Full	14.41	PC2	PASS
N77-3450-3550	30	60	CP-QPSK	M	Edge_1RB_Left	14.98	PC2	PASS
N77-3450-3550	30	60	CP-QPSK	M	Inner_Full	14.73	PC2	PASS
N77-3450-3550	30	60	CP-QPSK	M	Edge_1RB_Right	14.43	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	H	Outer_Full	14.47	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	H	Edge_1RB_Left	14.42	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	H	Inner_Full	15.11	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	H	Edge_1RB_Right	14.46	PC2	PASS
N77-3450-3550	30	60	CP-QPSK	H	Outer_Full	15.15	PC2	PASS
N77-3450-3550	30	60	CP-QPSK	H	Edge_1RB_Left	15.07	PC2	PASS
N77-3450-3550	30	60	CP-QPSK	H	Inner_Full	15.04	PC2	PASS
N77-3450-3550	30	60	CP-QPSK	H	Edge_1RB_Right	14.94	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	L	Outer_Full	14.84	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	L	Edge_1RB_Left	14.91	PC2	PASS

N77-3450-3550	30	80	DFT-QPSK	L	Inner_Full	14.88	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	L	Edge_1RB_Right	14.75	PC2	PASS
N77-3450-3550	30	80	CP-QPSK	L	Outer_Full	14.88	PC2	PASS
N77-3450-3550	30	80	CP-QPSK	L	Edge_1RB_Left	15.00	PC2	PASS
N77-3450-3550	30	80	CP-QPSK	L	Inner_Full	14.89	PC2	PASS
N77-3450-3550	30	80	CP-QPSK	L	Edge_1RB_Right	15.06	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	M	Outer_Full	14.57	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	M	Edge_1RB_Left	15.03	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	M	Inner_Full	14.89	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	M	Edge_1RB_Right	15.14	PC2	PASS
N77-3450-3550	30	80	CP-QPSK	M	Outer_Full	15.15	PC2	PASS
N77-3450-3550	30	80	CP-QPSK	M	Edge_1RB_Left	14.60	PC2	PASS
N77-3450-3550	30	80	CP-QPSK	M	Inner_Full	14.15	PC2	PASS
N77-3450-3550	30	80	CP-QPSK	M	Edge_1RB_Right	14.70	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	H	Outer_Full	14.73	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	H	Edge_1RB_Left	14.45	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	H	Inner_Full	14.74	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	H	Edge_1RB_Right	14.85	PC2	PASS
N77-3450-3550	30	80	CP-QPSK	H	Outer_Full	14.47	PC2	PASS
N77-3450-3550	30	80	CP-QPSK	H	Edge_1RB_Left	14.49	PC2	PASS
N77-3450-3550	30	80	CP-QPSK	H	Inner_Full	15.19	PC2	PASS
N77-3450-3550	30	80	CP-QPSK	H	Edge_1RB_Right	15.05	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	L	Outer_Full	15.15	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	L	Edge_1RB_Left	15.18	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	L	Inner_Full	15.10	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	L	Edge_1RB_Right	15.00	PC2	PASS
N77-3450-3550	30	90	CP-QPSK	L	Outer_Full	15.01	PC2	PASS
N77-3450-3550	30	90	CP-QPSK	L	Edge_1RB_Left	15.13	PC2	PASS
N77-3450-3550	30	90	CP-QPSK	L	Inner_Full	14.46	PC2	PASS
N77-3450-3550	30	90	CP-QPSK	L	Edge_1RB_Right	15.12	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	M	Outer_Full	14.42	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	M	Edge_1RB_Left	15.13	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	M	Inner_Full	14.59	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	M	Edge_1RB_Right	14.16	PC2	PASS
N77-3450-3550	30	90	CP-QPSK	M	Outer_Full	14.71	PC2	PASS
N77-3450-3550	30	90	CP-QPSK	M	Edge_1RB_Left	14.48	PC2	PASS
N77-3450-3550	30	90	CP-QPSK	M	Inner_Full	14.94	PC2	PASS
N77-3450-3550	30	90	CP-QPSK	M	Edge_1RB_Right	14.64	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	H	Outer_Full	15.00	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	H	Edge_1RB_Left	14.84	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	H	Inner_Full	14.86	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	H	Edge_1RB_Right	14.44	PC2	PASS

N77-3450-3550	30	90	CP-QPSK	H	Outer_Full	14.64	PC2	PASS
N77-3450-3550	30	90	CP-QPSK	H	Edge_1RB_Left	14.28	PC2	PASS
N77-3450-3550	30	90	CP-QPSK	H	Inner_Full	14.66	PC2	PASS
N77-3450-3550	30	90	CP-QPSK	H	Edge_1RB_Right	14.89	PC2	PASS
N77-3450-3550	30	100	DFT-QPSK	M	Outer_Full	14.44	PC2	PASS
N77-3450-3550	30	100	DFT-QPSK	M	Edge_1RB_Left	14.58	PC2	PASS
N77-3450-3550	30	100	DFT-QPSK	M	Inner_Full	14.58	PC2	PASS
N77-3450-3550	30	100	DFT-QPSK	M	Edge_1RB_Right	15.23	PC2	PASS
N77-3450-3550	30	100	CP-QPSK	M	Outer_Full	14.54	PC2	PASS
N77-3450-3550	30	100	CP-QPSK	M	Edge_1RB_Left	14.54	PC2	PASS
N77-3450-3550	30	100	CP-QPSK	M	Inner_Full	14.89	PC2	PASS
N77-3450-3550	30	100	CP-QPSK	M	Edge_1RB_Right	14.55	PC2	PASS

5G NR(P3): Hotspot ON

Band	SCS	Bandwidth	Modulation	Channel	RB Config	Power (dBm)	Power Class	Verdict
N77-3450-3550	30	10	DFT-QPSK	L	Outer_Full	15.22	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	L	Edge_1RB_Left	15.09	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	L	Inner_Full	15.18	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	L	Edge_1RB_Right	15.42	PC2	PASS
N77-3450-3550	30	10	CP-QPSK	L	Outer_Full	15.25	PC2	PASS
N77-3450-3550	30	10	CP-QPSK	L	Edge_1RB_Left	15.04	PC2	PASS
N77-3450-3550	30	10	CP-QPSK	L	Inner_Full	15.46	PC2	PASS
N77-3450-3550	30	10	CP-QPSK	L	Edge_1RB_Right	14.99	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	M	Outer_Full	14.54	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	M	Edge_1RB_Left	14.61	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	M	Inner_Full	14.64	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	M	Edge_1RB_Right	14.56	PC2	PASS
N77-3450-3550	30	10	CP-QPSK	M	Outer_Full	14.59	PC2	PASS
N77-3450-3550	30	10	CP-QPSK	M	Edge_1RB_Left	15.30	PC2	PASS
N77-3450-3550	30	10	CP-QPSK	M	Inner_Full	14.54	PC2	PASS
N77-3450-3550	30	10	CP-QPSK	M	Edge_1RB_Right	14.45	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	H	Outer_Full	14.64	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	H	Edge_1RB_Left	14.57	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	H	Inner_Full	14.59	PC2	PASS
N77-3450-3550	30	10	DFT-QPSK	H	Edge_1RB_Right	15.25	PC2	PASS
N77-3450-3550	30	10	CP-QPSK	H	Outer_Full	15.00	PC2	PASS
N77-3450-3550	30	10	CP-QPSK	H	Edge_1RB_Left	15.34	PC2	PASS
N77-3450-3550	30	10	CP-QPSK	H	Inner_Full	15.02	PC2	PASS
N77-3450-3550	30	10	CP-QPSK	H	Edge_1RB_Right	15.00	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	L	Outer_Full	14.99	PC2	PASS

N77-3450-3550	30	15	DFT-QPSK	L	Edge_1RB_Left	15.08	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	L	Inner_Full	15.07	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	L	Edge_1RB_Right	15.05	PC2	PASS
N77-3450-3550	30	15	CP-QPSK	L	Outer_Full	15.01	PC2	PASS
N77-3450-3550	30	15	CP-QPSK	L	Edge_1RB_Left	14.66	PC2	PASS
N77-3450-3550	30	15	CP-QPSK	L	Inner_Full	14.44	PC2	PASS
N77-3450-3550	30	15	CP-QPSK	L	Edge_1RB_Right	14.70	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	M	Outer_Full	14.75	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	M	Edge_1RB_Left	14.57	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	M	Inner_Full	14.68	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	M	Edge_1RB_Right	14.67	PC2	PASS
N77-3450-3550	30	15	CP-QPSK	M	Outer_Full	14.55	PC2	PASS
N77-3450-3550	30	15	CP-QPSK	M	Edge_1RB_Left	14.89	PC2	PASS
N77-3450-3550	30	15	CP-QPSK	M	Inner_Full	15.11	PC2	PASS
N77-3450-3550	30	15	CP-QPSK	M	Edge_1RB_Right	15.00	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	H	Outer_Full	14.72	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	H	Edge_1RB_Left	14.54	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	H	Inner_Full	14.37	PC2	PASS
N77-3450-3550	30	15	DFT-QPSK	H	Edge_1RB_Right	14.45	PC2	PASS
N77-3450-3550	30	15	CP-QPSK	H	Outer_Full	14.76	PC2	PASS
N77-3450-3550	30	15	CP-QPSK	H	Edge_1RB_Left	14.75	PC2	PASS
N77-3450-3550	30	15	CP-QPSK	H	Inner_Full	14.58	PC2	PASS
N77-3450-3550	30	15	CP-QPSK	H	Edge_1RB_Right	14.63	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	L	Outer_Full	14.31	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	L	Edge_1RB_Left	14.65	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	L	Inner_Full	14.64	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	L	Edge_1RB_Right	14.67	PC2	PASS
N77-3450-3550	30	20	CP-QPSK	L	Outer_Full	14.69	PC2	PASS
N77-3450-3550	30	20	CP-QPSK	L	Edge_1RB_Left	14.80	PC2	PASS
N77-3450-3550	30	20	CP-QPSK	L	Inner_Full	14.46	PC2	PASS
N77-3450-3550	30	20	CP-QPSK	L	Edge_1RB_Right	15.05	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	M	Outer_Full	15.02	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	M	Edge_1RB_Left	15.08	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	M	Inner_Full	15.06	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	M	Edge_1RB_Right	15.27	PC2	PASS
N77-3450-3550	30	20	CP-QPSK	M	Outer_Full	15.40	PC2	PASS
N77-3450-3550	30	20	CP-QPSK	M	Edge_1RB_Left	15.02	PC2	PASS
N77-3450-3550	30	20	CP-QPSK	M	Inner_Full	15.06	PC2	PASS
N77-3450-3550	30	20	CP-QPSK	M	Edge_1RB_Right	15.00	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	H	Outer_Full	14.87	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	H	Edge_1RB_Left	15.06	PC2	PASS
N77-3450-3550	30	20	DFT-QPSK	H	Inner_Full	14.78	PC2	PASS

N77-3450-3550	30	20	DFT-QPSK	H	Edge_1RB_Right	15.07	PC2	PASS
N77-3450-3550	30	20	CP-QPSK	H	Outer_Full	14.42	PC2	PASS
N77-3450-3550	30	20	CP-QPSK	H	Edge_1RB_Left	14.46	PC2	PASS
N77-3450-3550	30	20	CP-QPSK	H	Inner_Full	14.42	PC2	PASS
N77-3450-3550	30	20	CP-QPSK	H	Edge_1RB_Right	14.71	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	L	Outer_Full	14.42	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	L	Edge_1RB_Left	14.34	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	L	Inner_Full	14.18	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	L	Edge_1RB_Right	14.42	PC2	PASS
N77-3450-3550	30	40	CP-QPSK	L	Outer_Full	14.58	PC2	PASS
N77-3450-3550	30	40	CP-QPSK	L	Edge_1RB_Left	14.55	PC2	PASS
N77-3450-3550	30	40	CP-QPSK	L	Inner_Full	14.72	PC2	PASS
N77-3450-3550	30	40	CP-QPSK	L	Edge_1RB_Right	14.46	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	M	Outer_Full	14.64	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	M	Edge_1RB_Left	14.06	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	M	Inner_Full	14.42	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	M	Edge_1RB_Right	14.42	PC2	PASS
N77-3450-3550	30	40	CP-QPSK	M	Outer_Full	14.43	PC2	PASS
N77-3450-3550	30	40	CP-QPSK	M	Edge_1RB_Left	14.67	PC2	PASS
N77-3450-3550	30	40	CP-QPSK	M	Inner_Full	14.34	PC2	PASS
N77-3450-3550	30	40	CP-QPSK	M	Edge_1RB_Right	14.55	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	H	Outer_Full	14.89	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	H	Edge_1RB_Left	15.05	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	H	Inner_Full	15.15	PC2	PASS
N77-3450-3550	30	40	DFT-QPSK	H	Edge_1RB_Right	15.19	PC2	PASS
N77-3450-3550	30	40	CP-QPSK	H	Outer_Full	15.08	PC2	PASS
N77-3450-3550	30	40	CP-QPSK	H	Edge_1RB_Left	14.87	PC2	PASS
N77-3450-3550	30	40	CP-QPSK	H	Inner_Full	14.42	PC2	PASS
N77-3450-3550	30	40	CP-QPSK	H	Edge_1RB_Right	14.65	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	L	Outer_Full	14.42	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	L	Edge_1RB_Left	14.67	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	L	Inner_Full	14.69	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	L	Edge_1RB_Right	14.80	PC2	PASS
N77-3450-3550	30	50	CP-QPSK	L	Outer_Full	14.67	PC2	PASS
N77-3450-3550	30	50	CP-QPSK	L	Edge_1RB_Left	14.67	PC2	PASS
N77-3450-3550	30	50	CP-QPSK	L	Inner_Full	14.48	PC2	PASS
N77-3450-3550	30	50	CP-QPSK	L	Edge_1RB_Right	14.58	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	M	Outer_Full	14.63	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	M	Edge_1RB_Left	15.21	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	M	Inner_Full	15.16	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	M	Edge_1RB_Right	15.02	PC2	PASS
N77-3450-3550	30	50	CP-QPSK	M	Outer_Full	14.68	PC2	PASS

N77-3450-3550	30	50	CP-QPSK	M	Edge_1RB_Left	15.48	PC2	PASS
N77-3450-3550	30	50	CP-QPSK	M	Inner_Full	14.68	PC2	PASS
N77-3450-3550	30	50	CP-QPSK	M	Edge_1RB_Right	14.41	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	H	Outer_Full	14.78	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	H	Edge_1RB_Left	14.47	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	H	Inner_Full	14.59	PC2	PASS
N77-3450-3550	30	50	DFT-QPSK	H	Edge_1RB_Right	14.49	PC2	PASS
N77-3450-3550	30	50	CP-QPSK	H	Outer_Full	14.48	PC2	PASS
N77-3450-3550	30	50	CP-QPSK	H	Edge_1RB_Left	14.49	PC2	PASS
N77-3450-3550	30	50	CP-QPSK	H	Inner_Full	14.57	PC2	PASS
N77-3450-3550	30	50	CP-QPSK	H	Edge_1RB_Right	14.93	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	L	Outer_Full	14.54	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	L	Edge_1RB_Left	14.54	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	L	Inner_Full	15.02	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	L	Edge_1RB_Right	15.19	PC2	PASS
N77-3450-3550	30	60	CP-QPSK	L	Outer_Full	14.46	PC2	PASS
N77-3450-3550	30	60	CP-QPSK	L	Edge_1RB_Left	15.03	PC2	PASS
N77-3450-3550	30	60	CP-QPSK	L	Inner_Full	15.07	PC2	PASS
N77-3450-3550	30	60	CP-QPSK	L	Edge_1RB_Right	15.14	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	M	Outer_Full	15.01	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	M	Edge_1RB_Left	14.66	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	M	Inner_Full	14.28	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	M	Edge_1RB_Right	14.70	PC2	PASS
N77-3450-3550	30	60	CP-QPSK	M	Outer_Full	14.73	PC2	PASS
N77-3450-3550	30	60	CP-QPSK	M	Edge_1RB_Left	14.57	PC2	PASS
N77-3450-3550	30	60	CP-QPSK	M	Inner_Full	14.15	PC2	PASS
N77-3450-3550	30	60	CP-QPSK	M	Edge_1RB_Right	14.67	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	H	Outer_Full	14.47	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	H	Edge_1RB_Left	14.42	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	H	Inner_Full	15.11	PC2	PASS
N77-3450-3550	30	60	DFT-QPSK	H	Edge_1RB_Right	15.17	PC2	PASS
N77-3450-3550	30	60	CP-QPSK	H	Outer_Full	15.15	PC2	PASS
N77-3450-3550	30	60	CP-QPSK	H	Edge_1RB_Left	15.07	PC2	PASS
N77-3450-3550	30	60	CP-QPSK	H	Inner_Full	15.10	PC2	PASS
N77-3450-3550	30	60	CP-QPSK	H	Edge_1RB_Right	15.08	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	L	Outer_Full	15.01	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	L	Edge_1RB_Left	14.91	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	L	Inner_Full	14.88	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	L	Edge_1RB_Right	15.12	PC2	PASS
N77-3450-3550	30	80	CP-QPSK	L	Outer_Full	14.89	PC2	PASS
N77-3450-3550	30	80	CP-QPSK	L	Edge_1RB_Left	15.13	PC2	PASS
N77-3450-3550	30	80	CP-QPSK	L	Inner_Full	15.02	PC2	PASS

N77-3450-3550	30	80	CP-QPSK	L	Edge_1RB_Right	15.19	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	M	Outer_Full	14.57	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	M	Edge_1RB_Left	15.03	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	M	Inner_Full	14.89	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	M	Edge_1RB_Right	15.14	PC2	PASS
N77-3450-3550	30	80	CP-QPSK	M	Outer_Full	15.01	PC2	PASS
N77-3450-3550	30	80	CP-QPSK	M	Edge_1RB_Left	14.66	PC2	PASS
N77-3450-3550	30	80	CP-QPSK	M	Inner_Full	14.15	PC2	PASS
N77-3450-3550	30	80	CP-QPSK	M	Edge_1RB_Right	14.70	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	H	Outer_Full	14.73	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	H	Edge_1RB_Left	14.46	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	H	Inner_Full	14.67	PC2	PASS
N77-3450-3550	30	80	DFT-QPSK	H	Edge_1RB_Right	14.67	PC2	PASS
N77-3450-3550	30	80	CP-QPSK	H	Outer_Full	14.47	PC2	PASS
N77-3450-3550	30	80	CP-QPSK	H	Edge_1RB_Left	14.89	PC2	PASS
N77-3450-3550	30	80	CP-QPSK	H	Inner_Full	15.11	PC2	PASS
N77-3450-3550	30	80	CP-QPSK	H	Edge_1RB_Right	15.08	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	L	Outer_Full	15.15	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	L	Edge_1RB_Left	15.32	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	L	Inner_Full	15.10	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	L	Edge_1RB_Right	15.08	PC2	PASS
N77-3450-3550	30	90	CP-QPSK	L	Outer_Full	15.01	PC2	PASS
N77-3450-3550	30	90	CP-QPSK	L	Edge_1RB_Left	15.13	PC2	PASS
N77-3450-3550	30	90	CP-QPSK	L	Inner_Full	14.46	PC2	PASS
N77-3450-3550	30	90	CP-QPSK	L	Edge_1RB_Right	15.12	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	M	Outer_Full	14.42	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	M	Edge_1RB_Left	15.13	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	M	Inner_Full	14.59	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	M	Edge_1RB_Right	14.16	PC2	PASS
N77-3450-3550	30	90	CP-QPSK	M	Outer_Full	14.71	PC2	PASS
N77-3450-3550	30	90	CP-QPSK	M	Edge_1RB_Left	14.34	PC2	PASS
N77-3450-3550	30	90	CP-QPSK	M	Inner_Full	14.46	PC2	PASS
N77-3450-3550	30	90	CP-QPSK	M	Edge_1RB_Right	14.88	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	H	Outer_Full	15.24	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	H	Edge_1RB_Left	14.71	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	H	Inner_Full	15.13	PC2	PASS
N77-3450-3550	30	90	DFT-QPSK	H	Edge_1RB_Right	14.59	PC2	PASS
N77-3450-3550	30	90	CP-QPSK	H	Outer_Full	14.75	PC2	PASS
N77-3450-3550	30	90	CP-QPSK	H	Edge_1RB_Left	14.58	PC2	PASS
N77-3450-3550	30	90	CP-QPSK	H	Inner_Full	14.49	PC2	PASS
N77-3450-3550	30	90	CP-QPSK	H	Edge_1RB_Right	14.04	PC2	PASS
N77-3450-3550	30	100	DFT-QPSK	M	Outer_Full	14.41	PC2	PASS

N77-3450-3550	30	100	DFT-QPSK	M	Edge_1RB_Left	14.52	PC2	PASS
N77-3450-3550	30	100	DFT-QPSK	M	Inner_Full	15.87	PC2	PASS
N77-3450-3550	30	100	DFT-QPSK	M	Edge_1RB_Right	14.25	PC2	PASS
N77-3450-3550	30	100	CP-QPSK	M	Outer_Full	14.45	PC2	PASS
N77-3450-3550	30	100	CP-QPSK	M	Edge_1RB_Left	14.62	PC2	PASS
N77-3450-3550	30	100	CP-QPSK	M	Inner_Full	14.42	PC2	PASS
N77-3450-3550	30	100	CP-QPSK	M	Edge_1RB_Right	14.58	PC2	PASS

N77_3700-3980MHz**5G NR(P1):**

Band	SCS	Bandwidth	Modulation	Channel	RB Config	Power (dBm)	Power Class	Verdict
N77-3700-3980	30	10	DFT-QPSK	L	Outer_Full	24.25	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	L	Edge_1RB_Left	21.86	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	L	Inner_Full	25.26	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	L	Edge_1RB_Right	21.85	PC2	PASS
N77-3700-3980	30	10	CP-QPSK	L	Outer_Full	22.26	PC2	PASS
N77-3700-3980	30	10	CP-QPSK	L	Edge_1RB_Left	21.85	PC2	PASS
N77-3700-3980	30	10	CP-QPSK	L	Inner_Full	23.77	PC2	PASS
N77-3700-3980	30	10	CP-QPSK	L	Edge_1RB_Right	21.96	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	M	Outer_Full	24.66	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	M	Edge_1RB_Left	22.15	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	M	Inner_Full	25.61	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	M	Edge_1RB_Right	22.37	PC2	PASS
N77-3700-3980	30	10	CP-QPSK	M	Outer_Full	22.70	PC2	PASS
N77-3700-3980	30	10	CP-QPSK	M	Edge_1RB_Left	22.16	PC2	PASS
N77-3700-3980	30	10	CP-QPSK	M	Inner_Full	24.08	PC2	PASS
N77-3700-3980	30	10	CP-QPSK	M	Edge_1RB_Right	22.24	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	H	Outer_Full	24.32	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	H	Edge_1RB_Left	21.78	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	H	Inner_Full	25.27	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	H	Edge_1RB_Right	21.90	PC2	PASS
N77-3700-3980	30	10	CP-QPSK	H	Outer_Full	22.26	PC2	PASS
N77-3700-3980	30	10	CP-QPSK	H	Edge_1RB_Left	21.86	PC2	PASS
N77-3700-3980	30	10	CP-QPSK	H	Inner_Full	23.78	PC2	PASS
N77-3700-3980	30	10	CP-QPSK	H	Edge_1RB_Right	22.07	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	L	Outer_Full	24.12	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	L	Edge_1RB_Left	21.68	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	L	Inner_Full	25.06	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	L	Edge_1RB_Right	21.61	PC2	PASS
N77-3700-3980	30	15	CP-QPSK	L	Outer_Full	22.15	PC2	PASS

N77-3700-3980	30	15	CP-QPSK	L	Edge_1RB_Left	21.71	PC2	PASS
N77-3700-3980	30	15	CP-QPSK	L	Inner_Full	23.53	PC2	PASS
N77-3700-3980	30	15	CP-QPSK	L	Edge_1RB_Right	21.83	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	M	Outer_Full	24.57	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	M	Edge_1RB_Left	22.00	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	M	Inner_Full	25.59	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	M	Edge_1RB_Right	22.21	PC2	PASS
N77-3700-3980	30	15	CP-QPSK	M	Outer_Full	22.56	PC2	PASS
N77-3700-3980	30	15	CP-QPSK	M	Edge_1RB_Left	21.95	PC2	PASS
N77-3700-3980	30	15	CP-QPSK	M	Inner_Full	24.05	PC2	PASS
N77-3700-3980	30	15	CP-QPSK	M	Edge_1RB_Right	22.21	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	H	Outer_Full	24.33	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	H	Edge_1RB_Left	21.70	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	H	Inner_Full	25.22	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	H	Edge_1RB_Right	21.89	PC2	PASS
N77-3700-3980	30	15	CP-QPSK	H	Outer_Full	22.26	PC2	PASS
N77-3700-3980	30	15	CP-QPSK	H	Edge_1RB_Left	21.85	PC2	PASS
N77-3700-3980	30	15	CP-QPSK	H	Inner_Full	23.72	PC2	PASS
N77-3700-3980	30	15	CP-QPSK	H	Edge_1RB_Right	22.02	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	L	Outer_Full	24.10	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	L	Edge_1RB_Left	21.53	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	L	Inner_Full	25.10	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	L	Edge_1RB_Right	21.70	PC2	PASS
N77-3700-3980	30	20	CP-QPSK	L	Outer_Full	22.16	PC2	PASS
N77-3700-3980	30	20	CP-QPSK	L	Edge_1RB_Left	21.73	PC2	PASS
N77-3700-3980	30	20	CP-QPSK	L	Inner_Full	23.55	PC2	PASS
N77-3700-3980	30	20	CP-QPSK	L	Edge_1RB_Right	21.79	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	M	Outer_Full	24.67	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	M	Edge_1RB_Left	22.02	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	M	Inner_Full	25.57	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	M	Edge_1RB_Right	22.07	PC2	PASS
N77-3700-3980	30	20	CP-QPSK	M	Outer_Full	22.61	PC2	PASS
N77-3700-3980	30	20	CP-QPSK	M	Edge_1RB_Left	22.19	PC2	PASS
N77-3700-3980	30	20	CP-QPSK	M	Inner_Full	24.07	PC2	PASS
N77-3700-3980	30	20	CP-QPSK	M	Edge_1RB_Right	22.33	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	H	Outer_Full	24.28	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	H	Edge_1RB_Left	21.92	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	H	Inner_Full	25.26	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	H	Edge_1RB_Right	21.90	PC2	PASS
N77-3700-3980	30	20	CP-QPSK	H	Outer_Full	22.22	PC2	PASS
N77-3700-3980	30	20	CP-QPSK	H	Edge_1RB_Left	22.13	PC2	PASS
N77-3700-3980	30	20	CP-QPSK	H	Inner_Full	23.77	PC2	PASS

N77-3700-3980	30	20	CP-QPSK	H	Edge_1RB_Right	22.07	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	L	Outer_Full	24.11	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	L	Edge_1RB_Left	21.32	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	L	Inner_Full	25.10	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	L	Edge_1RB_Right	21.54	PC2	PASS
N77-3700-3980	30	40	CP-QPSK	L	Outer_Full	22.12	PC2	PASS
N77-3700-3980	30	40	CP-QPSK	L	Edge_1RB_Left	21.42	PC2	PASS
N77-3700-3980	30	40	CP-QPSK	L	Inner_Full	23.60	PC2	PASS
N77-3700-3980	30	40	CP-QPSK	L	Edge_1RB_Right	21.53	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	M	Outer_Full	24.49	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	M	Edge_1RB_Left	21.71	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	M	Inner_Full	25.54	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	M	Edge_1RB_Right	21.80	PC2	PASS
N77-3700-3980	30	40	CP-QPSK	M	Outer_Full	22.49	PC2	PASS
N77-3700-3980	30	40	CP-QPSK	M	Edge_1RB_Left	21.78	PC2	PASS
N77-3700-3980	30	40	CP-QPSK	M	Inner_Full	24.00	PC2	PASS
N77-3700-3980	30	40	CP-QPSK	M	Edge_1RB_Right	22.00	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	H	Outer_Full	24.20	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	H	Edge_1RB_Left	21.19	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	H	Inner_Full	25.31	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	H	Edge_1RB_Right	21.61	PC2	PASS
N77-3700-3980	30	40	CP-QPSK	H	Outer_Full	22.18	PC2	PASS
N77-3700-3980	30	40	CP-QPSK	H	Edge_1RB_Left	21.51	PC2	PASS
N77-3700-3980	30	40	CP-QPSK	H	Inner_Full	23.80	PC2	PASS
N77-3700-3980	30	40	CP-QPSK	H	Edge_1RB_Right	21.79	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	L	Outer_Full	24.21	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	L	Edge_1RB_Left	21.51	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	L	Inner_Full	25.19	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	L	Edge_1RB_Right	21.53	PC2	PASS
N77-3700-3980	30	50	CP-QPSK	L	Outer_Full	22.23	PC2	PASS
N77-3700-3980	30	50	CP-QPSK	L	Edge_1RB_Left	21.70	PC2	PASS
N77-3700-3980	30	50	CP-QPSK	L	Inner_Full	23.65	PC2	PASS
N77-3700-3980	30	50	CP-QPSK	L	Edge_1RB_Right	21.57	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	M	Outer_Full	24.56	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	M	Edge_1RB_Left	21.75	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	M	Inner_Full	25.55	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	M	Edge_1RB_Right	21.75	PC2	PASS
N77-3700-3980	30	50	CP-QPSK	M	Outer_Full	22.53	PC2	PASS
N77-3700-3980	30	50	CP-QPSK	M	Edge_1RB_Left	21.89	PC2	PASS
N77-3700-3980	30	50	CP-QPSK	M	Inner_Full	24.02	PC2	PASS
N77-3700-3980	30	50	CP-QPSK	M	Edge_1RB_Right	21.85	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	H	Outer_Full	24.19	PC2	PASS

N77-3700-3980	30	50	DFT-QPSK	H	Edge_1RB_Left	21.25	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	H	Inner_Full	25.33	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	H	Edge_1RB_Right	21.64	PC2	PASS
N77-3700-3980	30	50	CP-QPSK	H	Outer_Full	22.16	PC2	PASS
N77-3700-3980	30	50	CP-QPSK	H	Edge_1RB_Left	21.39	PC2	PASS
N77-3700-3980	30	50	CP-QPSK	H	Inner_Full	23.75	PC2	PASS
N77-3700-3980	30	50	CP-QPSK	H	Edge_1RB_Right	21.70	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	L	Outer_Full	24.21	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	L	Edge_1RB_Left	21.34	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	L	Inner_Full	25.22	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	L	Edge_1RB_Right	21.50	PC2	PASS
N77-3700-3980	30	60	CP-QPSK	L	Outer_Full	22.21	PC2	PASS
N77-3700-3980	30	60	CP-QPSK	L	Edge_1RB_Left	21.43	PC2	PASS
N77-3700-3980	30	60	CP-QPSK	L	Inner_Full	23.71	PC2	PASS
N77-3700-3980	30	60	CP-QPSK	L	Edge_1RB_Right	21.57	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	M	Outer_Full	24.52	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	M	Edge_1RB_Left	21.76	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	M	Inner_Full	25.57	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	M	Edge_1RB_Right	21.85	PC2	PASS
N77-3700-3980	30	60	CP-QPSK	M	Outer_Full	22.53	PC2	PASS
N77-3700-3980	30	60	CP-QPSK	M	Edge_1RB_Left	21.76	PC2	PASS
N77-3700-3980	30	60	CP-QPSK	M	Inner_Full	24.02	PC2	PASS
N77-3700-3980	30	60	CP-QPSK	M	Edge_1RB_Right	21.75	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	H	Outer_Full	24.13	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	H	Edge_1RB_Left	21.47	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	H	Inner_Full	25.21	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	H	Edge_1RB_Right	21.68	PC2	PASS
N77-3700-3980	30	60	CP-QPSK	H	Outer_Full	22.12	PC2	PASS
N77-3700-3980	30	60	CP-QPSK	H	Edge_1RB_Left	21.48	PC2	PASS
N77-3700-3980	30	60	CP-QPSK	H	Inner_Full	23.77	PC2	PASS
N77-3700-3980	30	60	CP-QPSK	H	Edge_1RB_Right	21.53	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	L	Outer_Full	24.45	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	L	Edge_1RB_Left	21.50	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	L	Inner_Full	25.64	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	L	Edge_1RB_Right	21.77	PC2	PASS
N77-3700-3980	30	80	CP-QPSK	L	Outer_Full	22.51	PC2	PASS
N77-3700-3980	30	80	CP-QPSK	L	Edge_1RB_Left	21.59	PC2	PASS
N77-3700-3980	30	80	CP-QPSK	L	Inner_Full	24.03	PC2	PASS
N77-3700-3980	30	80	CP-QPSK	L	Edge_1RB_Right	21.85	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	M	Outer_Full	24.44	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	M	Edge_1RB_Left	21.36	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	M	Inner_Full	25.62	PC2	PASS

N77-3700-3980	30	80	DFT-QPSK	M	Edge_1RB_Right	21.63	PC2	PASS
N77-3700-3980	30	80	CP-QPSK	M	Outer_Full	22.49	PC2	PASS
N77-3700-3980	30	80	CP-QPSK	M	Edge_1RB_Left	21.50	PC2	PASS
N77-3700-3980	30	80	CP-QPSK	M	Inner_Full	24.00	PC2	PASS
N77-3700-3980	30	80	CP-QPSK	M	Edge_1RB_Right	21.94	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	H	Outer_Full	24.17	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	H	Edge_1RB_Left	20.99	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	H	Inner_Full	25.26	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	H	Edge_1RB_Right	21.38	PC2	PASS
N77-3700-3980	30	80	CP-QPSK	H	Outer_Full	22.14	PC2	PASS
N77-3700-3980	30	80	CP-QPSK	H	Edge_1RB_Left	21.36	PC2	PASS
N77-3700-3980	30	80	CP-QPSK	H	Inner_Full	23.63	PC2	PASS
N77-3700-3980	30	80	CP-QPSK	H	Edge_1RB_Right	21.68	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	L	Outer_Full	24.47	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	L	Edge_1RB_Left	21.34	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	L	Inner_Full	25.64	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	L	Edge_1RB_Right	21.44	PC2	PASS
N77-3700-3980	30	90	CP-QPSK	L	Outer_Full	22.48	PC2	PASS
N77-3700-3980	30	90	CP-QPSK	L	Edge_1RB_Left	21.52	PC2	PASS
N77-3700-3980	30	90	CP-QPSK	L	Inner_Full	24.10	PC2	PASS
N77-3700-3980	30	90	CP-QPSK	L	Edge_1RB_Right	21.52	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	M	Outer_Full	24.42	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	M	Edge_1RB_Left	21.07	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	M	Inner_Full	25.54	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	M	Edge_1RB_Right	21.43	PC2	PASS
N77-3700-3980	30	90	CP-QPSK	M	Outer_Full	22.48	PC2	PASS
N77-3700-3980	30	90	CP-QPSK	M	Edge_1RB_Left	21.30	PC2	PASS
N77-3700-3980	30	90	CP-QPSK	M	Inner_Full	24.04	PC2	PASS
N77-3700-3980	30	90	CP-QPSK	M	Edge_1RB_Right	21.53	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	H	Outer_Full	24.14	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	H	Edge_1RB_Left	21.12	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	H	Inner_Full	25.23	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	H	Edge_1RB_Right	21.16	PC2	PASS
N77-3700-3980	30	90	CP-QPSK	H	Outer_Full	22.17	PC2	PASS
N77-3700-3980	30	90	CP-QPSK	H	Edge_1RB_Left	21.65	PC2	PASS
N77-3700-3980	30	90	CP-QPSK	H	Inner_Full	23.60	PC2	PASS
N77-3700-3980	30	90	CP-QPSK	H	Edge_1RB_Right	21.36	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	L	Outer_Full	24.48	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	L	Edge_1RB_Left	21.29	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	L	Inner_Full	24.99	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	L	Edge_1RB_Right	20.27	PC2	PASS
N77-3700-3980	30	100	CP-QPSK	L	Outer_Full	22.48	PC2	PASS

N77-3700-3980	30	100	CP-QPSK	L	Edge_1RB_Left	20.93	PC2	PASS
N77-3700-3980	30	100	CP-QPSK	L	Inner_Full	24.19	PC2	PASS
N77-3700-3980	30	100	CP-QPSK	L	Edge_1RB_Right	21.00	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	M	Outer_Full	24.39	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	M	Edge_1RB_Left	21.11	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	M	Inner_Full	25.72	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	M	Edge_1RB_Right	21.22	PC2	PASS
N77-3700-3980	30	100	CP-QPSK	M	Outer_Full	22.36	PC2	PASS
N77-3700-3980	30	100	CP-QPSK	M	Edge_1RB_Left	20.96	PC2	PASS
N77-3700-3980	30	100	CP-QPSK	M	Inner_Full	23.99	PC2	PASS
N77-3700-3980	30	100	CP-QPSK	M	Edge_1RB_Right	20.88	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	H	Outer_Full	23.91	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	H	Edge_1RB_Left	21.24	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	H	Inner_Full	24.98	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	H	Edge_1RB_Right	20.89	PC2	PASS
N77-3700-3980	30	100	CP-QPSK	H	Outer_Full	21.90	PC2	PASS
N77-3700-3980	30	100	CP-QPSK	H	Edge_1RB_Left	21.02	PC2	PASS
N77-3700-3980	30	100	CP-QPSK	H	Inner_Full	23.49	PC2	PASS
N77-3700-3980	30	100	CP-QPSK	H	Edge_1RB_Right	20.64	PC2	PASS

5G NR(P4): Sensor ON

Band	SCS	Bandwidth	Modulation	Channel	RB Config	Power (dBm)	Power Class	Verdict
N77-3700-3980	30	10	DFT-QPSK	L	Outer_Full	16.89	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	L	Edge_1RB_Left	16.71	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	L	Inner_Full	17.13	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	L	Edge_1RB_Right	17.27	PC2	PASS
N77-3700-3980	30	10	CP-QPSK	L	Outer_Full	16.48	PC2	PASS
N77-3700-3980	30	10	CP-QPSK	L	Edge_1RB_Left	16.36	PC2	PASS
N77-3700-3980	30	10	CP-QPSK	L	Inner_Full	17.01	PC2	PASS
N77-3700-3980	30	10	CP-QPSK	L	Edge_1RB_Right	16.82	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	M	Outer_Full	16.52	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	M	Edge_1RB_Left	17.42	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	M	Inner_Full	16.68	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	M	Edge_1RB_Right	17.08	PC2	PASS
N77-3700-3980	30	10	CP-QPSK	M	Outer_Full	17.17	PC2	PASS
N77-3700-3980	30	10	CP-QPSK	M	Edge_1RB_Left	16.34	PC2	PASS
N77-3700-3980	30	10	CP-QPSK	M	Inner_Full	17.22	PC2	PASS
N77-3700-3980	30	10	CP-QPSK	M	Edge_1RB_Right	16.47	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	H	Outer_Full	17.31	PC2	PASS

N77-3700-3980	30	10	DFT-QPSK	H	Edge_1RB_Left	16.89	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	H	Inner_Full	17.20	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	H	Edge_1RB_Right	16.58	PC2	PASS
N77-3700-3980	30	10	CP-QPSK	H	Outer_Full	16.45	PC2	PASS
N77-3700-3980	30	10	CP-QPSK	H	Edge_1RB_Left	17.34	PC2	PASS
N77-3700-3980	30	10	CP-QPSK	H	Inner_Full	17.18	PC2	PASS
N77-3700-3980	30	10	CP-QPSK	H	Edge_1RB_Right	16.47	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	L	Outer_Full	16.67	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	L	Edge_1RB_Left	16.22	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	L	Inner_Full	17.10	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	L	Edge_1RB_Right	16.38	PC2	PASS
N77-3700-3980	30	15	CP-QPSK	L	Outer_Full	16.49	PC2	PASS
N77-3700-3980	30	15	CP-QPSK	L	Edge_1RB_Left	17.23	PC2	PASS
N77-3700-3980	30	15	CP-QPSK	L	Inner_Full	16.88	PC2	PASS
N77-3700-3980	30	15	CP-QPSK	L	Edge_1RB_Right	17.24	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	M	Outer_Full	17.14	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	M	Edge_1RB_Left	16.95	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	M	Inner_Full	17.15	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	M	Edge_1RB_Right	16.82	PC2	PASS
N77-3700-3980	30	15	CP-QPSK	M	Outer_Full	17.15	PC2	PASS
N77-3700-3980	30	15	CP-QPSK	M	Edge_1RB_Left	16.57	PC2	PASS
N77-3700-3980	30	15	CP-QPSK	M	Inner_Full	17.20	PC2	PASS
N77-3700-3980	30	15	CP-QPSK	M	Edge_1RB_Right	16.48	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	H	Outer_Full	16.58	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	H	Edge_1RB_Left	17.16	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	H	Inner_Full	17.23	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	H	Edge_1RB_Right	16.82	PC2	PASS
N77-3700-3980	30	15	CP-QPSK	H	Outer_Full	16.58	PC2	PASS
N77-3700-3980	30	15	CP-QPSK	H	Edge_1RB_Left	16.48	PC2	PASS
N77-3700-3980	30	15	CP-QPSK	H	Inner_Full	17.24	PC2	PASS
N77-3700-3980	30	15	CP-QPSK	H	Edge_1RB_Right	16.38	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	L	Outer_Full	16.49	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	L	Edge_1RB_Left	17.23	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	L	Inner_Full	16.48	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	L	Edge_1RB_Right	17.24	PC2	PASS
N77-3700-3980	30	20	CP-QPSK	L	Outer_Full	17.03	PC2	PASS
N77-3700-3980	30	20	CP-QPSK	L	Edge_1RB_Left	16.88	PC2	PASS
N77-3700-3980	30	20	CP-QPSK	L	Inner_Full	17.16	PC2	PASS
N77-3700-3980	30	20	CP-QPSK	L	Edge_1RB_Right	16.82	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	M	Outer_Full	17.14	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	M	Edge_1RB_Left	16.94	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	M	Inner_Full	17.05	PC2	PASS

N77-3700-3980	30	20	DFT-QPSK	M	Edge_1RB_Right	16.87	PC2	PASS
N77-3700-3980	30	20	CP-QPSK	M	Outer_Full	16.58	PC2	PASS
N77-3700-3980	30	20	CP-QPSK	M	Edge_1RB_Left	17.42	PC2	PASS
N77-3700-3980	30	20	CP-QPSK	M	Inner_Full	17.23	PC2	PASS
N77-3700-3980	30	20	CP-QPSK	M	Edge_1RB_Right	16.76	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	H	Outer_Full	16.94	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	H	Edge_1RB_Left	16.69	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	H	Inner_Full	17.24	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	H	Edge_1RB_Right	16.24	PC2	PASS
N77-3700-3980	30	20	CP-QPSK	H	Outer_Full	16.49	PC2	PASS
N77-3700-3980	30	20	CP-QPSK	H	Edge_1RB_Left	17.23	PC2	PASS
N77-3700-3980	30	20	CP-QPSK	H	Inner_Full	16.71	PC2	PASS
N77-3700-3980	30	20	CP-QPSK	H	Edge_1RB_Right	17.18	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	L	Outer_Full	17.05	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	L	Edge_1RB_Left	16.95	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	L	Inner_Full	17.16	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	L	Edge_1RB_Right	16.57	PC2	PASS
N77-3700-3980	30	40	CP-QPSK	L	Outer_Full	17.11	PC2	PASS
N77-3700-3980	30	40	CP-QPSK	L	Edge_1RB_Left	16.56	PC2	PASS
N77-3700-3980	30	40	CP-QPSK	L	Inner_Full	17.00	PC2	PASS
N77-3700-3980	30	40	CP-QPSK	L	Edge_1RB_Right	16.74	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	M	Outer_Full	16.24	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	M	Edge_1RB_Left	17.24	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	M	Inner_Full	17.15	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	M	Edge_1RB_Right	16.89	PC2	PASS
N77-3700-3980	30	40	CP-QPSK	M	Outer_Full	16.36	PC2	PASS
N77-3700-3980	30	40	CP-QPSK	M	Edge_1RB_Left	16.66	PC2	PASS
N77-3700-3980	30	40	CP-QPSK	M	Inner_Full	17.16	PC2	PASS
N77-3700-3980	30	40	CP-QPSK	M	Edge_1RB_Right	16.62	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	H	Outer_Full	16.82	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	H	Edge_1RB_Left	17.23	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	H	Inner_Full	16.49	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	H	Edge_1RB_Right	17.27	PC2	PASS
N77-3700-3980	30	40	CP-QPSK	H	Outer_Full	17.01	PC2	PASS
N77-3700-3980	30	40	CP-QPSK	H	Edge_1RB_Left	16.95	PC2	PASS
N77-3700-3980	30	40	CP-QPSK	H	Inner_Full	17.15	PC2	PASS
N77-3700-3980	30	40	CP-QPSK	H	Edge_1RB_Right	16.82	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	L	Outer_Full	17.15	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	L	Edge_1RB_Left	16.71	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	L	Inner_Full	17.20	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	L	Edge_1RB_Right	16.88	PC2	PASS
N77-3700-3980	30	50	CP-QPSK	L	Outer_Full	16.66	PC2	PASS

N77-3700-3980	30	50	CP-QPSK	L	Edge_1RB_Left	17.42	PC2	PASS
N77-3700-3980	30	50	CP-QPSK	L	Inner_Full	17.16	PC2	PASS
N77-3700-3980	30	50	CP-QPSK	L	Edge_1RB_Right	16.82	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	M	Outer_Full	16.84	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	M	Edge_1RB_Left	16.69	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	M	Inner_Full	17.15	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	M	Edge_1RB_Right	16.38	PC2	PASS
N77-3700-3980	30	50	CP-QPSK	M	Outer_Full	16.38	PC2	PASS
N77-3700-3980	30	50	CP-QPSK	M	Edge_1RB_Left	17.23	PC2	PASS
N77-3700-3980	30	50	CP-QPSK	M	Inner_Full	16.91	PC2	PASS
N77-3700-3980	30	50	CP-QPSK	M	Edge_1RB_Right	17.00	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	H	Outer_Full	17.15	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	H	Edge_1RB_Left	16.95	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	H	Inner_Full	17.00	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	H	Edge_1RB_Right	16.82	PC2	PASS
N77-3700-3980	30	50	CP-QPSK	H	Outer_Full	17.07	PC2	PASS
N77-3700-3980	30	50	CP-QPSK	H	Edge_1RB_Left	16.17	PC2	PASS
N77-3700-3980	30	50	CP-QPSK	H	Inner_Full	17.20	PC2	PASS
N77-3700-3980	30	50	CP-QPSK	H	Edge_1RB_Right	16.87	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	L	Outer_Full	16.42	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	L	Edge_1RB_Left	17.42	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	L	Inner_Full	17.11	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	L	Edge_1RB_Right	16.82	PC2	PASS
N77-3700-3980	30	60	CP-QPSK	L	Outer_Full	16.44	PC2	PASS
N77-3700-3980	30	60	CP-QPSK	L	Edge_1RB_Left	16.69	PC2	PASS
N77-3700-3980	30	60	CP-QPSK	L	Inner_Full	17.24	PC2	PASS
N77-3700-3980	30	60	CP-QPSK	L	Edge_1RB_Right	16.36	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	M	Outer_Full	16.49	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	M	Edge_1RB_Left	17.25	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	M	Inner_Full	16.88	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	M	Edge_1RB_Right	17.11	PC2	PASS
N77-3700-3980	30	60	CP-QPSK	M	Outer_Full	17.05	PC2	PASS
N77-3700-3980	30	60	CP-QPSK	M	Edge_1RB_Left	16.22	PC2	PASS
N77-3700-3980	30	60	CP-QPSK	M	Inner_Full	17.16	PC2	PASS
N77-3700-3980	30	60	CP-QPSK	M	Edge_1RB_Right	16.34	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	H	Outer_Full	17.00	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	H	Edge_1RB_Left	16.76	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	H	Inner_Full	17.17	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	H	Edge_1RB_Right	16.87	PC2	PASS
N77-3700-3980	30	60	CP-QPSK	H	Outer_Full	16.59	PC2	PASS
N77-3700-3980	30	60	CP-QPSK	H	Edge_1RB_Left	17.15	PC2	PASS
N77-3700-3980	30	60	CP-QPSK	H	Inner_Full	17.23	PC2	PASS

N77-3700-3980	30	60	CP-QPSK	H	Edge_1RB_Right	16.82	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	L	Outer_Full	16.89	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	L	Edge_1RB_Left	16.68	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	L	Inner_Full	17.22	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	L	Edge_1RB_Right	16.32	PC2	PASS
N77-3700-3980	30	80	CP-QPSK	L	Outer_Full	16.40	PC2	PASS
N77-3700-3980	30	80	CP-QPSK	L	Edge_1RB_Left	17.24	PC2	PASS
N77-3700-3980	30	80	CP-QPSK	L	Inner_Full	16.82	PC2	PASS
N77-3700-3980	30	80	CP-QPSK	L	Edge_1RB_Right	17.23	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	M	Outer_Full	17.06	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	M	Edge_1RB_Left	16.97	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	M	Inner_Full	17.19	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	M	Edge_1RB_Right	16.84	PC2	PASS
N77-3700-3980	30	80	CP-QPSK	M	Outer_Full	17.22	PC2	PASS
N77-3700-3980	30	80	CP-QPSK	M	Edge_1RB_Left	16.76	PC2	PASS
N77-3700-3980	30	80	CP-QPSK	M	Inner_Full	17.41	PC2	PASS
N77-3700-3980	30	80	CP-QPSK	M	Edge_1RB_Right	16.87	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	H	Outer_Full	16.28	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	H	Edge_1RB_Left	17.42	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	H	Inner_Full	17.71	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	H	Edge_1RB_Right	16.72	PC2	PASS
N77-3700-3980	30	80	CP-QPSK	H	Outer_Full	16.57	PC2	PASS
N77-3700-3980	30	80	CP-QPSK	H	Edge_1RB_Left	16.6	PC2	PASS
N77-3700-3980	30	80	CP-QPSK	H	Inner_Full	17.24	PC2	PASS
N77-3700-3980	30	80	CP-QPSK	H	Edge_1RB_Right	16.38	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	L	Outer_Full	16.49	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	L	Edge_1RB_Left	17.23	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	L	Inner_Full	16.88	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	L	Edge_1RB_Right	17.24	PC2	PASS
N77-3700-3980	30	90	CP-QPSK	L	Outer_Full	17.05	PC2	PASS
N77-3700-3980	30	90	CP-QPSK	L	Edge_1RB_Left	16.95	PC2	PASS
N77-3700-3980	30	90	CP-QPSK	L	Inner_Full	17.16	PC2	PASS
N77-3700-3980	30	90	CP-QPSK	L	Edge_1RB_Right	16.82	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	M	Outer_Full	17.15	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	M	Edge_1RB_Left	16.76	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	M	Inner_Full	17.20	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	M	Edge_1RB_Right	16.87	PC2	PASS
N77-3700-3980	30	90	CP-QPSK	M	Outer_Full	16.47	PC2	PASS
N77-3700-3980	30	90	CP-QPSK	M	Edge_1RB_Left	17.42	PC2	PASS
N77-3700-3980	30	90	CP-QPSK	M	Inner_Full	17.35	PC2	PASS
N77-3700-3980	30	90	CP-QPSK	M	Edge_1RB_Right	16.76	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	H	Outer_Full	16.94	PC2	PASS

N77-3700-3980	30	90	DFT-QPSK	H	Edge_1RB_Left	16.57	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	H	Inner_Full	17.24	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	H	Edge_1RB_Right	16.25	PC2	PASS
N77-3700-3980	30	90	CP-QPSK	H	Outer_Full	16.49	PC2	PASS
N77-3700-3980	30	90	CP-QPSK	H	Edge_1RB_Left	17.26	PC2	PASS
N77-3700-3980	30	90	CP-QPSK	H	Inner_Full	17.42	PC2	PASS
N77-3700-3980	30	90	CP-QPSK	H	Edge_1RB_Right	16.84	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	L	Outer_Full	17.23	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	L	Edge_1RB_Left	16.68	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	L	Inner_Full	16.88	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	L	Edge_1RB_Right	17.24	PC2	PASS
N77-3700-3980	30	100	CP-QPSK	L	Outer_Full	17.05	PC2	PASS
N77-3700-3980	30	100	CP-QPSK	L	Edge_1RB_Left	16.95	PC2	PASS
N77-3700-3980	30	100	CP-QPSK	L	Inner_Full	17.16	PC2	PASS
N77-3700-3980	30	100	CP-QPSK	L	Edge_1RB_Right	16.82	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	M	Outer_Full	17.15	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	M	Edge_1RB_Left	16.76	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	M	Inner_Full	17.43	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	M	Edge_1RB_Right	16.87	PC2	PASS
N77-3700-3980	30	100	CP-QPSK	M	Outer_Full	16.58	PC2	PASS
N77-3700-3980	30	100	CP-QPSK	M	Edge_1RB_Left	17.20	PC2	PASS
N77-3700-3980	30	100	CP-QPSK	M	Inner_Full	17.23	PC2	PASS
N77-3700-3980	30	100	CP-QPSK	M	Edge_1RB_Right	16.82	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	H	Outer_Full	16.94	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	H	Edge_1RB_Left	16.69	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	H	Inner_Full	17.24	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	H	Edge_1RB_Right	16.38	PC2	PASS
N77-3700-3980	30	100	CP-QPSK	H	Outer_Full	16.49	PC2	PASS
N77-3700-3980	30	100	CP-QPSK	H	Edge_1RB_Left	17.23	PC2	PASS
N77-3700-3980	30	100	CP-QPSK	H	Inner_Full	17.16	PC2	PASS
N77-3700-3980	30	100	CP-QPSK	H	Edge_1RB_Right	17.01	PC2	PASS

5G NR(P2): Receiver ON

Band	SCS	Bandwidth	Modulation	Channel	RB Config	Power (dBm)	Power Class	Verdict
N77-3700-3980	30	10	DFT-QPSK	L	Outer_Full	14.53	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	L	Edge_1RB_Left	14.54	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	L	Inner_Full	14.46	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	L	Edge_1RB_Right	14.43	PC2	PASS
N77-3700-3980	30	10	CP-QPSK	L	Outer_Full	14.58	PC2	PASS
N77-3700-3980	30	10	CP-QPSK	L	Edge_1RB_Left	14.58	PC2	PASS

N77-3700-3980	30	10	CP-QPSK	L	Inner_Full	14.48	PC2	PASS
N77-3700-3980	30	10	CP-QPSK	L	Edge_1RB_Right	14.63	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	M	Outer_Full	15.21	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	M	Edge_1RB_Left	15.14	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	M	Inner_Full	15.23	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	M	Edge_1RB_Right	15.14	PC2	PASS
N77-3700-3980	30	10	CP-QPSK	M	Outer_Full	15.28	PC2	PASS
N77-3700-3980	30	10	CP-QPSK	M	Edge_1RB_Left	15.30	PC2	PASS
N77-3700-3980	30	10	CP-QPSK	M	Inner_Full	15.21	PC2	PASS
N77-3700-3980	30	10	CP-QPSK	M	Edge_1RB_Right	15.18	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	H	Outer_Full	15.08	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	H	Edge_1RB_Left	15.05	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	H	Inner_Full	15.08	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	H	Edge_1RB_Right	15.03	PC2	PASS
N77-3700-3980	30	10	CP-QPSK	H	Outer_Full	15.04	PC2	PASS
N77-3700-3980	30	10	CP-QPSK	H	Edge_1RB_Left	15.11	PC2	PASS
N77-3700-3980	30	10	CP-QPSK	H	Inner_Full	15.02	PC2	PASS
N77-3700-3980	30	10	CP-QPSK	H	Edge_1RB_Right	14.97	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	L	Outer_Full	14.66	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	L	Edge_1RB_Left	14.59	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	L	Inner_Full	14.65	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	L	Edge_1RB_Right	14.54	PC2	PASS
N77-3700-3980	30	15	CP-QPSK	L	Outer_Full	14.61	PC2	PASS
N77-3700-3980	30	15	CP-QPSK	L	Edge_1RB_Left	14.69	PC2	PASS
N77-3700-3980	30	15	CP-QPSK	L	Inner_Full	14.57	PC2	PASS
N77-3700-3980	30	15	CP-QPSK	L	Edge_1RB_Right	14.59	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	M	Outer_Full	15.30	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	M	Edge_1RB_Left	15.19	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	M	Inner_Full	15.31	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	M	Edge_1RB_Right	15.04	PC2	PASS
N77-3700-3980	30	15	CP-QPSK	M	Outer_Full	15.26	PC2	PASS
N77-3700-3980	30	15	CP-QPSK	M	Edge_1RB_Left	15.10	PC2	PASS
N77-3700-3980	30	15	CP-QPSK	M	Inner_Full	15.26	PC2	PASS
N77-3700-3980	30	15	CP-QPSK	M	Edge_1RB_Right	15.00	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	H	Outer_Full	15.16	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	H	Edge_1RB_Left	15.02	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	H	Inner_Full	15.15	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	H	Edge_1RB_Right	14.91	PC2	PASS
N77-3700-3980	30	15	CP-QPSK	H	Outer_Full	15.11	PC2	PASS
N77-3700-3980	30	15	CP-QPSK	H	Edge_1RB_Left	15.11	PC2	PASS
N77-3700-3980	30	15	CP-QPSK	H	Inner_Full	15.14	PC2	PASS
N77-3700-3980	30	15	CP-QPSK	H	Edge_1RB_Right	15.01	PC2	PASS

N77-3700-3980	30	20	DFT-QPSK	L	Outer_Full	14.66	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	L	Edge_1RB_Left	14.52	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	L	Inner_Full	14.70	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	L	Edge_1RB_Right	14.51	PC2	PASS
N77-3700-3980	30	20	CP-QPSK	L	Outer_Full	14.57	PC2	PASS
N77-3700-3980	30	20	CP-QPSK	L	Edge_1RB_Left	14.55	PC2	PASS
N77-3700-3980	30	20	CP-QPSK	L	Inner_Full	14.70	PC2	PASS
N77-3700-3980	30	20	CP-QPSK	L	Edge_1RB_Right	14.47	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	M	Outer_Full	15.33	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	M	Edge_1RB_Left	15.22	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	M	Inner_Full	15.35	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	M	Edge_1RB_Right	15.15	PC2	PASS
N77-3700-3980	30	20	CP-QPSK	M	Outer_Full	15.32	PC2	PASS
N77-3700-3980	30	20	CP-QPSK	M	Edge_1RB_Left	15.15	PC2	PASS
N77-3700-3980	30	20	CP-QPSK	M	Inner_Full	15.39	PC2	PASS
N77-3700-3980	30	20	CP-QPSK	M	Edge_1RB_Right	15.20	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	H	Outer_Full	15.11	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	H	Edge_1RB_Left	14.94	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	H	Inner_Full	15.12	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	H	Edge_1RB_Right	14.89	PC2	PASS
N77-3700-3980	30	20	CP-QPSK	H	Outer_Full	15.14	PC2	PASS
N77-3700-3980	30	20	CP-QPSK	H	Edge_1RB_Left	14.96	PC2	PASS
N77-3700-3980	30	20	CP-QPSK	H	Inner_Full	15.28	PC2	PASS
N77-3700-3980	30	20	CP-QPSK	H	Edge_1RB_Right	14.84	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	L	Outer_Full	14.49	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	L	Edge_1RB_Left	14.18	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	L	Inner_Full	14.79	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	L	Edge_1RB_Right	14.26	PC2	PASS
N77-3700-3980	30	40	CP-QPSK	L	Outer_Full	14.61	PC2	PASS
N77-3700-3980	30	40	CP-QPSK	L	Edge_1RB_Left	14.16	PC2	PASS
N77-3700-3980	30	40	CP-QPSK	L	Inner_Full	14.68	PC2	PASS
N77-3700-3980	30	40	CP-QPSK	L	Edge_1RB_Right	14.23	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	M	Outer_Full	14.99	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	M	Edge_1RB_Left	15.02	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	M	Inner_Full	14.68	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	M	Edge_1RB_Right	15.30	PC2	PASS
N77-3700-3980	30	40	CP-QPSK	M	Outer_Full	14.93	PC2	PASS
N77-3700-3980	30	40	CP-QPSK	M	Edge_1RB_Left	14.99	PC2	PASS
N77-3700-3980	30	40	CP-QPSK	M	Inner_Full	14.78	PC2	PASS
N77-3700-3980	30	40	CP-QPSK	M	Edge_1RB_Right	14.80	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	H	Outer_Full	14.59	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	H	Edge_1RB_Left	14.87	PC2	PASS

N77-3700-3980	30	40	DFT-QPSK	H	Inner_Full	14.70	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	H	Edge_1RB_Right	14.78	PC2	PASS
N77-3700-3980	30	40	CP-QPSK	H	Outer_Full	14.57	PC2	PASS
N77-3700-3980	30	40	CP-QPSK	H	Edge_1RB_Left	14.53	PC2	PASS
N77-3700-3980	30	40	CP-QPSK	H	Inner_Full	14.54	PC2	PASS
N77-3700-3980	30	40	CP-QPSK	H	Edge_1RB_Right	14.46	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	L	Outer_Full	14.43	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	L	Edge_1RB_Left	14.58	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	L	Inner_Full	14.58	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	L	Edge_1RB_Right	14.48	PC2	PASS
N77-3700-3980	30	50	CP-QPSK	L	Outer_Full	14.63	PC2	PASS
N77-3700-3980	30	50	CP-QPSK	L	Edge_1RB_Left	15.21	PC2	PASS
N77-3700-3980	30	50	CP-QPSK	L	Inner_Full	15.14	PC2	PASS
N77-3700-3980	30	50	CP-QPSK	L	Edge_1RB_Right	15.23	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	M	Outer_Full	15.14	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	M	Edge_1RB_Left	15.28	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	M	Inner_Full	15.30	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	M	Edge_1RB_Right	15.21	PC2	PASS
N77-3700-3980	30	50	CP-QPSK	M	Outer_Full	15.18	PC2	PASS
N77-3700-3980	30	50	CP-QPSK	M	Edge_1RB_Left	15.16	PC2	PASS
N77-3700-3980	30	50	CP-QPSK	M	Inner_Full	15.02	PC2	PASS
N77-3700-3980	30	50	CP-QPSK	M	Edge_1RB_Right	15.15	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	H	Outer_Full	14.91	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	H	Edge_1RB_Left	15.11	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	H	Inner_Full	15.11	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	H	Edge_1RB_Right	15.14	PC2	PASS
N77-3700-3980	30	50	CP-QPSK	H	Outer_Full	15.01	PC2	PASS
N77-3700-3980	30	50	CP-QPSK	H	Edge_1RB_Left	14.65	PC2	PASS
N77-3700-3980	30	50	CP-QPSK	H	Inner_Full	14.49	PC2	PASS
N77-3700-3980	30	50	CP-QPSK	H	Edge_1RB_Right	14.65	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	L	Outer_Full	14.64	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	L	Edge_1RB_Left	14.55	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	L	Inner_Full	14.69	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	L	Edge_1RB_Right	14.80	PC2	PASS
N77-3700-3980	30	60	CP-QPSK	L	Outer_Full	14.67	PC2	PASS
N77-3700-3980	30	60	CP-QPSK	L	Edge_1RB_Left	15.13	PC2	PASS
N77-3700-3980	30	60	CP-QPSK	L	Inner_Full	15.02	PC2	PASS
N77-3700-3980	30	60	CP-QPSK	L	Edge_1RB_Right	15.11	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	M	Outer_Full	15.14	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	M	Edge_1RB_Left	15.27	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	M	Inner_Full	15.11	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	M	Edge_1RB_Right	15.02	PC2	PASS

N77-3700-3980	30	60	CP-QPSK	M	Outer_Full	15.04	PC2	PASS
N77-3700-3980	30	60	CP-QPSK	M	Edge_1RB_Left	15.00	PC2	PASS
N77-3700-3980	30	60	CP-QPSK	M	Inner_Full	14.89	PC2	PASS
N77-3700-3980	30	60	CP-QPSK	M	Edge_1RB_Right	15.01	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	H	Outer_Full	14.85	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	H	Edge_1RB_Left	15.07	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	H	Inner_Full	14.99	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	H	Edge_1RB_Right	15.12	PC2	PASS
N77-3700-3980	30	60	CP-QPSK	H	Outer_Full	15.02	PC2	PASS
N77-3700-3980	30	60	CP-QPSK	H	Edge_1RB_Left	15.07	PC2	PASS
N77-3700-3980	30	60	CP-QPSK	H	Inner_Full	14.89	PC2	PASS
N77-3700-3980	30	60	CP-QPSK	H	Edge_1RB_Right	14.74	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	L	Outer_Full	14.56	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	L	Edge_1RB_Left	14.79	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	L	Inner_Full	14.75	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	L	Edge_1RB_Right	14.77	PC2	PASS
N77-3700-3980	30	80	CP-QPSK	L	Outer_Full	14.61	PC2	PASS
N77-3700-3980	30	80	CP-QPSK	L	Edge_1RB_Left	14.88	PC2	PASS
N77-3700-3980	30	80	CP-QPSK	L	Inner_Full	15.07	PC2	PASS
N77-3700-3980	30	80	CP-QPSK	L	Edge_1RB_Right	14.45	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	M	Outer_Full	15.10	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	M	Edge_1RB_Left	14.82	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	M	Inner_Full	14.94	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	M	Edge_1RB_Right	14.88	PC2	PASS
N77-3700-3980	30	80	CP-QPSK	M	Outer_Full	14.91	PC2	PASS
N77-3700-3980	30	80	CP-QPSK	M	Edge_1RB_Left	14.92	PC2	PASS
N77-3700-3980	30	80	CP-QPSK	M	Inner_Full	14.93	PC2	PASS
N77-3700-3980	30	80	CP-QPSK	M	Edge_1RB_Right	14.70	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	H	Outer_Full	14.78	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	H	Edge_1RB_Left	14.64	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	H	Inner_Full	14.53	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	H	Edge_1RB_Right	14.42	PC2	PASS
N77-3700-3980	30	80	CP-QPSK	H	Outer_Full	14.46	PC2	PASS
N77-3700-3980	30	80	CP-QPSK	H	Edge_1RB_Left	14.43	PC2	PASS
N77-3700-3980	30	80	CP-QPSK	H	Inner_Full	14.67	PC2	PASS
N77-3700-3980	30	80	CP-QPSK	H	Edge_1RB_Right	14.58	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	L	Outer_Full	14.66	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	L	Edge_1RB_Left	14.63	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	L	Inner_Full	15.02	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	L	Edge_1RB_Right	15.14	PC2	PASS
N77-3700-3980	30	90	CP-QPSK	L	Outer_Full	15.00	PC2	PASS
N77-3700-3980	30	90	CP-QPSK	L	Edge_1RB_Left	15.14	PC2	PASS

N77-3700-3980	30	90	CP-QPSK	L	Inner_Full	15.04	PC2	PASS
N77-3700-3980	30	90	CP-QPSK	L	Edge_1RB_Right	15.04	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	M	Outer_Full	15.03	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	M	Edge_1RB_Left	15.07	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	M	Inner_Full	15.02	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	M	Edge_1RB_Right	15.05	PC2	PASS
N77-3700-3980	30	90	CP-QPSK	M	Outer_Full	15.01	PC2	PASS
N77-3700-3980	30	90	CP-QPSK	M	Edge_1RB_Left	15.03	PC2	PASS
N77-3700-3980	30	90	CP-QPSK	M	Inner_Full	15.04	PC2	PASS
N77-3700-3980	30	90	CP-QPSK	M	Edge_1RB_Right	15.00	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	H	Outer_Full	15.07	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	H	Edge_1RB_Left	14.89	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	H	Inner_Full	14.66	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	H	Edge_1RB_Right	14.67	PC2	PASS
N77-3700-3980	30	90	CP-QPSK	H	Outer_Full	14.68	PC2	PASS
N77-3700-3980	30	90	CP-QPSK	H	Edge_1RB_Left	14.54	PC2	PASS
N77-3700-3980	30	90	CP-QPSK	H	Inner_Full	14.77	PC2	PASS
N77-3700-3980	30	90	CP-QPSK	H	Edge_1RB_Right	14.68	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	L	Outer_Full	15.00	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	L	Edge_1RB_Left	15.02	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	L	Inner_Full	15.31	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	L	Edge_1RB_Right	15.10	PC2	PASS
N77-3700-3980	30	100	CP-QPSK	L	Outer_Full	15.05	PC2	PASS
N77-3700-3980	30	100	CP-QPSK	L	Edge_1RB_Left	14.89	PC2	PASS
N77-3700-3980	30	100	CP-QPSK	L	Inner_Full	14.98	PC2	PASS
N77-3700-3980	30	100	CP-QPSK	L	Edge_1RB_Right	14.88	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	M	Outer_Full	14.86	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	M	Edge_1RB_Left	14.95	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	M	Inner_Full	15.02	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	M	Edge_1RB_Right	15.00	PC2	PASS
N77-3700-3980	30	100	CP-QPSK	M	Outer_Full	15.01	PC2	PASS
N77-3700-3980	30	100	CP-QPSK	M	Edge_1RB_Left	14.89	PC2	PASS
N77-3700-3980	30	100	CP-QPSK	M	Inner_Full	15.03	PC2	PASS
N77-3700-3980	30	100	CP-QPSK	M	Edge_1RB_Right	14.97	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	H	Outer_Full	14.87	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	H	Edge_1RB_Left	14.69	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	H	Inner_Full	14.56	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	H	Edge_1RB_Right	14.67	PC2	PASS
N77-3700-3980	30	100	CP-QPSK	H	Outer_Full	15.07	PC2	PASS
N77-3700-3980	30	100	CP-QPSK	H	Edge_1RB_Left	15.00	PC2	PASS
N77-3700-3980	30	100	CP-QPSK	H	Inner_Full	15.05	PC2	PASS
N77-3700-3980	30	100	CP-QPSK	H	Edge_1RB_Right	15.02	PC2	PASS

5G NR(P3): Hotspot ON

Band	SCS	Bandwidth	Modulation	Channel	RB Config	Power (dBm)	Power Class	Verdict
N77-3700-3980	30	10	DFT-QPSK	L	Outer_Full	14.82	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	L	Edge_1RB_Left	14.83	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	L	Inner_Full	14.49	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	L	Edge_1RB_Right	14.64	PC2	PASS
N77-3700-3980	30	10	CP-QPSK	L	Outer_Full	14.39	PC2	PASS
N77-3700-3980	30	10	CP-QPSK	L	Edge_1RB_Left	14.68	PC2	PASS
N77-3700-3980	30	10	CP-QPSK	L	Inner_Full	14.64	PC2	PASS
N77-3700-3980	30	10	CP-QPSK	L	Edge_1RB_Right	14.62	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	M	Outer_Full	15.00	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	M	Edge_1RB_Left	15.03	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	M	Inner_Full	15.04	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	M	Edge_1RB_Right	15.06	PC2	PASS
N77-3700-3980	30	10	CP-QPSK	M	Outer_Full	15.00	PC2	PASS
N77-3700-3980	30	10	CP-QPSK	M	Edge_1RB_Left	15.04	PC2	PASS
N77-3700-3980	30	10	CP-QPSK	M	Inner_Full	15.06	PC2	PASS
N77-3700-3980	30	10	CP-QPSK	M	Edge_1RB_Right	14.99	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	H	Outer_Full	15.00	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	H	Edge_1RB_Left	15.07	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	H	Inner_Full	15.03	PC2	PASS
N77-3700-3980	30	10	DFT-QPSK	H	Edge_1RB_Right	15.03	PC2	PASS
N77-3700-3980	30	10	CP-QPSK	H	Outer_Full	15.04	PC2	PASS
N77-3700-3980	30	10	CP-QPSK	H	Edge_1RB_Left	15.10	PC2	PASS
N77-3700-3980	30	10	CP-QPSK	H	Inner_Full	15.02	PC2	PASS
N77-3700-3980	30	10	CP-QPSK	H	Edge_1RB_Right	14.97	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	L	Outer_Full	14.66	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	L	Edge_1RB_Left	14.59	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	L	Inner_Full	14.65	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	L	Edge_1RB_Right	14.54	PC2	PASS
N77-3700-3980	30	15	CP-QPSK	L	Outer_Full	14.61	PC2	PASS
N77-3700-3980	30	15	CP-QPSK	L	Edge_1RB_Left	14.64	PC2	PASS
N77-3700-3980	30	15	CP-QPSK	L	Inner_Full	14.56	PC2	PASS
N77-3700-3980	30	15	CP-QPSK	L	Edge_1RB_Right	14.59	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	M	Outer_Full	15.30	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	M	Edge_1RB_Left	15.15	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	M	Inner_Full	15.31	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	M	Edge_1RB_Right	14.83	PC2	PASS
N77-3700-3980	30	15	CP-QPSK	M	Outer_Full	15.23	PC2	PASS
N77-3700-3980	30	15	CP-QPSK	M	Edge_1RB_Left	15.10	PC2	PASS

N77-3700-3980	30	15	CP-QPSK	M	Inner_Full	15.26	PC2	PASS
N77-3700-3980	30	15	CP-QPSK	M	Edge_1RB_Right	15.00	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	H	Outer_Full	15.05	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	H	Edge_1RB_Left	15.02	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	H	Inner_Full	15.19	PC2	PASS
N77-3700-3980	30	15	DFT-QPSK	H	Edge_1RB_Right	14.99	PC2	PASS
N77-3700-3980	30	15	CP-QPSK	H	Outer_Full	15.03	PC2	PASS
N77-3700-3980	30	15	CP-QPSK	H	Edge_1RB_Left	15.07	PC2	PASS
N77-3700-3980	30	15	CP-QPSK	H	Inner_Full	15.14	PC2	PASS
N77-3700-3980	30	15	CP-QPSK	H	Edge_1RB_Right	15.01	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	L	Outer_Full	14.66	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	L	Edge_1RB_Left	14.15	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	L	Inner_Full	14.70	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	L	Edge_1RB_Right	14.73	PC2	PASS
N77-3700-3980	30	20	CP-QPSK	L	Outer_Full	14.57	PC2	PASS
N77-3700-3980	30	20	CP-QPSK	L	Edge_1RB_Left	14.59	PC2	PASS
N77-3700-3980	30	20	CP-QPSK	L	Inner_Full	14.67	PC2	PASS
N77-3700-3980	30	20	CP-QPSK	L	Edge_1RB_Right	14.47	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	M	Outer_Full	14.89	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	M	Edge_1RB_Left	15.09	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	M	Inner_Full	15.17	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	M	Edge_1RB_Right	15.15	PC2	PASS
N77-3700-3980	30	20	CP-QPSK	M	Outer_Full	15.32	PC2	PASS
N77-3700-3980	30	20	CP-QPSK	M	Edge_1RB_Left	15.10	PC2	PASS
N77-3700-3980	30	20	CP-QPSK	M	Inner_Full	15.08	PC2	PASS
N77-3700-3980	30	20	CP-QPSK	M	Edge_1RB_Right	15.01	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	H	Outer_Full	15.13	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	H	Edge_1RB_Left	14.88	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	H	Inner_Full	15.12	PC2	PASS
N77-3700-3980	30	20	DFT-QPSK	H	Edge_1RB_Right	14.89	PC2	PASS
N77-3700-3980	30	20	CP-QPSK	H	Outer_Full	15.13	PC2	PASS
N77-3700-3980	30	20	CP-QPSK	H	Edge_1RB_Left	14.96	PC2	PASS
N77-3700-3980	30	20	CP-QPSK	H	Inner_Full	15.08	PC2	PASS
N77-3700-3980	30	20	CP-QPSK	H	Edge_1RB_Right	14.84	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	L	Outer_Full	14.67	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	L	Edge_1RB_Left	14.48	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	L	Inner_Full	14.67	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	L	Edge_1RB_Right	14.26	PC2	PASS
N77-3700-3980	30	40	CP-QPSK	L	Outer_Full	14.59	PC2	PASS
N77-3700-3980	30	40	CP-QPSK	L	Edge_1RB_Left	14.16	PC2	PASS
N77-3700-3980	30	40	CP-QPSK	L	Inner_Full	14.71	PC2	PASS
N77-3700-3980	30	40	CP-QPSK	L	Edge_1RB_Right	14.34	PC2	PASS

N77-3700-3980	30	40	DFT-QPSK	M	Outer_Full	14.46	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	M	Edge_1RB_Left	15.02	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	M	Inner_Full	14.68	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	M	Edge_1RB_Right	15.72	PC2	PASS
N77-3700-3980	30	40	CP-QPSK	M	Outer_Full	14.68	PC2	PASS
N77-3700-3980	30	40	CP-QPSK	M	Edge_1RB_Left	14.99	PC2	PASS
N77-3700-3980	30	40	CP-QPSK	M	Inner_Full	14.78	PC2	PASS
N77-3700-3980	30	40	CP-QPSK	M	Edge_1RB_Right	14.47	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	H	Outer_Full	14.59	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	H	Edge_1RB_Left	14.49	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	H	Inner_Full	14.48	PC2	PASS
N77-3700-3980	30	40	DFT-QPSK	H	Edge_1RB_Right	14.67	PC2	PASS
N77-3700-3980	30	40	CP-QPSK	H	Outer_Full	14.57	PC2	PASS
N77-3700-3980	30	40	CP-QPSK	H	Edge_1RB_Left	14.72	PC2	PASS
N77-3700-3980	30	40	CP-QPSK	H	Inner_Full	14.54	PC2	PASS
N77-3700-3980	30	40	CP-QPSK	H	Edge_1RB_Right	14.46	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	L	Outer_Full	14.43	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	L	Edge_1RB_Left	14.75	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	L	Inner_Full	14.48	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	L	Edge_1RB_Right	14.58	PC2	PASS
N77-3700-3980	30	50	CP-QPSK	L	Outer_Full	14.63	PC2	PASS
N77-3700-3980	30	50	CP-QPSK	L	Edge_1RB_Left	15.21	PC2	PASS
N77-3700-3980	30	50	CP-QPSK	L	Inner_Full	15.16	PC2	PASS
N77-3700-3980	30	50	CP-QPSK	L	Edge_1RB_Right	15.03	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	M	Outer_Full	15.02	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	M	Edge_1RB_Left	15.18	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	M	Inner_Full	15.00	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	M	Edge_1RB_Right	15.17	PC2	PASS
N77-3700-3980	30	50	CP-QPSK	M	Outer_Full	15.08	PC2	PASS
N77-3700-3980	30	50	CP-QPSK	M	Edge_1RB_Left	15.16	PC2	PASS
N77-3700-3980	30	50	CP-QPSK	M	Inner_Full	15.02	PC2	PASS
N77-3700-3980	30	50	CP-QPSK	M	Edge_1RB_Right	15.15	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	H	Outer_Full	14.89	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	H	Edge_1RB_Left	15.11	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	H	Inner_Full	15.15	PC2	PASS
N77-3700-3980	30	50	DFT-QPSK	H	Edge_1RB_Right	15.14	PC2	PASS
N77-3700-3980	30	50	CP-QPSK	H	Outer_Full	15.01	PC2	PASS
N77-3700-3980	30	50	CP-QPSK	H	Edge_1RB_Left	14.87	PC2	PASS
N77-3700-3980	30	50	CP-QPSK	H	Inner_Full	14.34	PC2	PASS
N77-3700-3980	30	50	CP-QPSK	H	Edge_1RB_Right	14.65	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	L	Outer_Full	14.64	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	L	Edge_1RB_Left	14.67	PC2	PASS

N77-3700-3980	30	60	DFT-QPSK	L	Inner_Full	14.69	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	L	Edge_1RB_Right	14.80	PC2	PASS
N77-3700-3980	30	60	CP-QPSK	L	Outer_Full	14.67	PC2	PASS
N77-3700-3980	30	60	CP-QPSK	L	Edge_1RB_Left	15.05	PC2	PASS
N77-3700-3980	30	60	CP-QPSK	L	Inner_Full	15.02	PC2	PASS
N77-3700-3980	30	60	CP-QPSK	L	Edge_1RB_Right	15.19	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	M	Outer_Full	15.07	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	M	Edge_1RB_Left	15.27	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	M	Inner_Full	15.11	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	M	Edge_1RB_Right	15.02	PC2	PASS
N77-3700-3980	30	60	CP-QPSK	M	Outer_Full	15.06	PC2	PASS
N77-3700-3980	30	60	CP-QPSK	M	Edge_1RB_Left	15.00	PC2	PASS
N77-3700-3980	30	60	CP-QPSK	M	Inner_Full	14.87	PC2	PASS
N77-3700-3980	30	60	CP-QPSK	M	Edge_1RB_Right	15.06	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	H	Outer_Full	14.95	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	H	Edge_1RB_Left	15.07	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	H	Inner_Full	14.89	PC2	PASS
N77-3700-3980	30	60	DFT-QPSK	H	Edge_1RB_Right	15.12	PC2	PASS
N77-3700-3980	30	60	CP-QPSK	H	Outer_Full	15.02	PC2	PASS
N77-3700-3980	30	60	CP-QPSK	H	Edge_1RB_Left	15.07	PC2	PASS
N77-3700-3980	30	60	CP-QPSK	H	Inner_Full	14.76	PC2	PASS
N77-3700-3980	30	60	CP-QPSK	H	Edge_1RB_Right	14.55	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	L	Outer_Full	14.53	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	L	Edge_1RB_Left	14.67	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	L	Inner_Full	14.75	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	L	Edge_1RB_Right	14.85	PC2	PASS
N77-3700-3980	30	80	CP-QPSK	L	Outer_Full	14.61	PC2	PASS
N77-3700-3980	30	80	CP-QPSK	L	Edge_1RB_Left	14.88	PC2	PASS
N77-3700-3980	30	80	CP-QPSK	L	Inner_Full	15.07	PC2	PASS
N77-3700-3980	30	80	CP-QPSK	L	Edge_1RB_Right	14.45	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	M	Outer_Full	15.10	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	M	Edge_1RB_Left	14.82	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	M	Inner_Full	14.49	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	M	Edge_1RB_Right	14.88	PC2	PASS
N77-3700-3980	30	80	CP-QPSK	M	Outer_Full	14.91	PC2	PASS
N77-3700-3980	30	80	CP-QPSK	M	Edge_1RB_Left	14.85	PC2	PASS
N77-3700-3980	30	80	CP-QPSK	M	Inner_Full	14.93	PC2	PASS
N77-3700-3980	30	80	CP-QPSK	M	Edge_1RB_Right	14.70	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	H	Outer_Full	14.46	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	H	Edge_1RB_Left	14.64	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	H	Inner_Full	14.71	PC2	PASS
N77-3700-3980	30	80	DFT-QPSK	H	Edge_1RB_Right	14.42	PC2	PASS

N77-3700-3980	30	80	CP-QPSK	H	Outer_Full	14.46	PC2	PASS
N77-3700-3980	30	80	CP-QPSK	H	Edge_1RB_Left	14.43	PC2	PASS
N77-3700-3980	30	80	CP-QPSK	H	Inner_Full	14.67	PC2	PASS
N77-3700-3980	30	80	CP-QPSK	H	Edge_1RB_Right	14.58	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	L	Outer_Full	14.55	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	L	Edge_1RB_Left	14.63	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	L	Inner_Full	15.02	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	L	Edge_1RB_Right	15.14	PC2	PASS
N77-3700-3980	30	90	CP-QPSK	L	Outer_Full	15.04	PC2	PASS
N77-3700-3980	30	90	CP-QPSK	L	Edge_1RB_Left	15.12	PC2	PASS
N77-3700-3980	30	90	CP-QPSK	L	Inner_Full	15.04	PC2	PASS
N77-3700-3980	30	90	CP-QPSK	L	Edge_1RB_Right	14.89	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	M	Outer_Full	15.03	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	M	Edge_1RB_Left	15.07	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	M	Inner_Full	15.02	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	M	Edge_1RB_Right	15.05	PC2	PASS
N77-3700-3980	30	90	CP-QPSK	M	Outer_Full	15.01	PC2	PASS
N77-3700-3980	30	90	CP-QPSK	M	Edge_1RB_Left	15.16	PC2	PASS
N77-3700-3980	30	90	CP-QPSK	M	Inner_Full	15.04	PC2	PASS
N77-3700-3980	30	90	CP-QPSK	M	Edge_1RB_Right	14.91	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	H	Outer_Full	15.07	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	H	Edge_1RB_Left	14.89	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	H	Inner_Full	14.66	PC2	PASS
N77-3700-3980	30	90	DFT-QPSK	H	Edge_1RB_Right	14.67	PC2	PASS
N77-3700-3980	30	90	CP-QPSK	H	Outer_Full	14.68	PC2	PASS
N77-3700-3980	30	90	CP-QPSK	H	Edge_1RB_Left	14.84	PC2	PASS
N77-3700-3980	30	90	CP-QPSK	H	Inner_Full	14.74	PC2	PASS
N77-3700-3980	30	90	CP-QPSK	H	Edge_1RB_Right	14.54	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	L	Outer_Full	14.98	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	L	Edge_1RB_Left	15.12	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	L	Inner_Full	15.04	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	L	Edge_1RB_Right	14.92	PC2	PASS
N77-3700-3980	30	100	CP-QPSK	L	Outer_Full	14.75	PC2	PASS
N77-3700-3980	30	100	CP-QPSK	L	Edge_1RB_Left	14.80	PC2	PASS
N77-3700-3980	30	100	CP-QPSK	L	Inner_Full	14.88	PC2	PASS
N77-3700-3980	30	100	CP-QPSK	L	Edge_1RB_Right	15.03	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	M	Outer_Full	14.75	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	M	Edge_1RB_Left	14.95	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	M	Inner_Full	15.02	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	M	Edge_1RB_Right	14.68	PC2	PASS
N77-3700-3980	30	100	CP-QPSK	M	Outer_Full	15.03	PC2	PASS
N77-3700-3980	30	100	CP-QPSK	M	Edge_1RB_Left	14.86	PC2	PASS

N77-3700-3980	30	100	CP-QPSK	M	Inner_Full	14.69	PC2	PASS
N77-3700-3980	30	100	CP-QPSK	M	Edge_1RB_Right	14.81	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	H	Outer_Full	14.82	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	H	Edge_1RB_Left	14.62	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	H	Inner_Full	14.65	PC2	PASS
N77-3700-3980	30	100	DFT-QPSK	H	Edge_1RB_Right	14.55	PC2	PASS
N77-3700-3980	30	100	CP-QPSK	H	Outer_Full	15.00	PC2	PASS
N77-3700-3980	30	100	CP-QPSK	H	Edge_1RB_Left	14.82	PC2	PASS
N77-3700-3980	30	100	CP-QPSK	H	Inner_Full	15.03	PC2	PASS
N77-3700-3980	30	100	CP-QPSK	H	Edge_1RB_Right	15.00	PC2	PASS

Remark:

1. Per KDB941225 D05 v02r05, Start with the largest channel bandwidth then measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle, and lower edge of each required test channel. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. 6 When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.
2. Per KDB941225 D05 v02r05, The procedures required for 1 RB allocation in 5.2.1 are applied to measure the SAR for QPSK with 50% RB allocation.
3. Per KDB941225 D05 v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations, and the highest reported SAR for 1 RB and 50% RB allocation in 5.2.1 and 5.2.2 are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
4. Per KDB941225 D05 v02r05, For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in 5.2.1, 5.2.2, and 5.2.3 to determine the QAM configurations that may need SAR measurement. For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is $> \frac{1}{2}$ dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg.

WLAN(5.2GHz)(P1)-Antenna 0				
Test Mode	Channel	Frequency (MHz)	Conducted Power (dBm)	Tune-up power (dBm)
802.11a	CH 36	5180	16.27	17.0
	CH 40	5200	16.34	17.0
	CH 48	5240	16.67	17.0
802.11n (HT20)	CH 36	5180	15.21	17.0
	CH 40	5200	15.37	17.0
	CH 48	5240	15.50	17.0
802.11n (HT40)	CH 38	5190	15.20	17.0
	CH 46	5230	15.95	17.0
802.11ac-VHT20	CH 36	5180	15.07	17.0
	CH 40	5200	15.49	17.0
	CH 48	5240	15.76	17.0
802.11ac-VHT40	CH 38	5190	15.45	17.0
	CH 46	5230	15.78	17.0
802.11ac-VHT80	CH42	5210	13.42	17.0
802.11ax-VHT20	CH 36	5180	14.47	17.0
	CH 40	5200	14.85	17.0
	CH 48	5240	15.31	17.0
802.11ax-VHT40	CH 38	5190	15.33	17.0
	CH 46	5230	15.63	17.0
802.11ax-VHT80	CH42	5210	15.01	17.0

WLAN(5.2GHz)(P1)-Antenna 1				
Test Mode	Channel	Frequency (MHz)	Conducted Power (dBm)	Tune-up power (dBm)
802.11a	CH 36	5180	15.09	16.0
	CH 40	5200	15.58	16.0
	CH 48	5240	15.78	16.0
802.11n (HT20)	CH 36	5180	14.10	16.0
	CH 40	5200	14.71	16.0
	CH 48	5240	14.57	16.0
802.11n (HT40)	CH 38	5190	14.63	16.0
	CH 46	5230	14.93	16.0
802.11ac-VHT20	CH 36	5180	14.12	16.0
	CH 40	5200	14.70	16.0

	CH 48	5240	14.72	16.0
802.11ac-VHT40	CH 38	5190	14.22	16.0
	CH 46	5230	14.88	16.0
802.11ac-VHT80	CH42	5210	12.30	16.0
802.11ax-VHT20	CH 36	5180	13.42	16.0
	CH 40	5200	14.25	16.0
	CH 48	5240	14.21	16.0
802.11ax-VHT40	CH 38	5190	14.20	16.0
	CH 46	5230	14.65	16.0
802.11ax-VHT80	CH42	5210	14.02	16.0

WLAN(5.3GHz)(P1) Antenna 0				
Test Mode	Channel	Frequency (MHz)	Conducted Power (dBm)	Tune-up power (dBm)
802.11a	CH 52	5260	16.46	16.5
	CH 56	5280	16.45	16.5
	CH 64	5320	16.42	16.5
802.11n (HT20)	CH 52	5260	15.43	16.5
	CH 56	5280	15.45	16.5
	CH 64	5320	15.16	16.5
802.11n (HT40)	CH 54	5270	15.59	16.5
	CH62	5310	15.32	16.5
802.11ac-VHT20	CH 52	5260	15.19	16.5
	CH 56	5280	15.55	16.5
	CH 64	5320	15.19	16.5
802.11ac-VHT40	CH 54	5270	15.33	16.5
	CH 62	5310	15.42	16.5
802.11ac-VHT80	CH 58	5290	14.93	16.5
802.11ax-VHT20	CH 52	5260	15.12	16.5
	CH 56	5280	15.14	16.5
	CH 64	5320	15.00	16.5
802.11ax-VHT40	CH 54	5270	15.22	16.5
	CH 62	5310	15.32	16.5
802.11ax-VHT80	CH 58	5290	15.02	16.5

WLAN(5.3GHz)(P1) Antenna 1				
Test Mode	Channel	Frequency (MHz)	Conducted Power (dBm)	Tune-up power (dBm)
802.11a	CH 52	5260	15.62	16.0
	CH 56	5280	15.72	16.0
	CH 64	5320	15.31	16.0
802.11n (HT20)	CH 52	5260	14.11	15.0
	CH 56	5280	14.73	15.0
	CH 64	5320	14.15	15.0
802.11n (HT40)	CH 54	5270	14.21	15.0
	CH62	5310	14.20	15.0
802.11ac-VHT20	CH 52	5260	14.64	15.0
	CH 56	5280	14.75	15.0
	CH 64	5320	13.90	15.0
802.11ac-VHT40	CH 54	5270	14.70	15.0
	CH 62	5310	14.37	15.0
802.11ac-VHT80	CH 58	5290	13.97	14.0
802.11ax-VHT20	CH 52	5260	13.81	14.5
	CH 56	5280	14.15	14.5
	CH 64	5320	14.05	14.5
802.11ax-VHT40	CH 54	5270	14.22	14.5
	CH 62	5310	13.85	14.5
802.11ax-VHT80	CH 58	5290	13.76	14.0

WLAN(5.6GHz)(P1)-Antenna 0				
Test Mode	Channel	Frequency (MHz)	Conducted Power (dBm)	Tune-up power (dBm)
802.11a	CH 100	5500	16.05	17.0
	CH 120	5600	16.22	17.0
	CH 140	5700	16.50	17.0
802.11n (HT20)	CH 100	5500	14.53	17.0
	CH 120	5600	15.10	17.0
	CH 140	5700	15.55	17.0
802.11n (HT40)	CH 102	5510	14.88	17.0
	CH118	5590	15.10	17.0
	CH134	5670	15.66	17.0
802.11ac-VHT20	CH 100	5500	14.63	17.0
	CH 120	5600	15.22	17.0

	CH 140	5700	15.34	17.0
802.11ac-VHT40	CH 102	5510	14.96	17.0
	CH118	5590	15.24	17.0
	CH134	5670	15.70	17.0
802.11ac-VHT80	CH106	5530	14.50	17.0
	CH122	5610	14.92	17.0
802.11ax-VHT20	CH 100	5500	14.22	17.0
	CH 120	5600	14.81	17.0
	CH 140	5700	15.28	17.0
802.11ax-VHT40	CH 102	5510	14.81	17.0
	CH118	5590	15.04	17.0
	CH134	5670	15.40	17.0
802.11ax-VHT80	CH106	5530	14.29	17.0
	CH122	5610	14.80	17.0

WLAN(5.6GHz)(P1)-Antenna 1				
Test Mode	Channel	Frequency (MHz)	Conducted Power (dBm)	Tune-up power (dBm)
802.11a	CH 100	5500	14.87	16.0
	CH 120	5600	15.29	16.0
	CH 140	5700	15.89	16.0
802.11n (HT20)	CH 100	5500	13.55	16.0
	CH 120	5600	14.12	16.0
	CH 140	5700	14.68	16.0
802.11n (HT40)	CH 102	5510	13.79	16.0
	CH118	5590	14.57	16.0
	CH134	5670	14.55	16.0
802.11ac-VHT20	CH 100	5500	13.45	16.0
	CH 120	5600	14.20	16.0
	CH 140	5700	14.94	16.0
802.11ac-VHT40	CH 102	5510	13.61	16.0
	CH118	5590	14.36	16.0
	CH134	5670	14.94	16.0
802.11ac-VHT80	CH106	5530	13.33	16.0
	CH122	5610	14.10	16.0
802.11ax-VHT20	CH 100	5500	12.94	16.0
	CH 120	5600	14.12	16.0
	CH 140	5700	14.53	16.0
802.11ax-VHT40	CH 102	5510	13.39	16.0
	CH118	5590	14.12	16.0

	CH134	5670	14.51	16.0
802.11ax-VHT80	CH106	5530	13.03	16.0
	CH122	5610	13.89	16.0

WLAN(5.8GHz)(P1) Antenna 0				
Test Mode	Channel	Frequency (MHz)	Conducted Power (dBm)	Tune-up power (dBm)
802.11a	CH 149	5745	16.57	17.0
	CH 157	5785	16.64	17.0
	CH 165	5825	16.59	17.0
802.11n (HT20)	CH 149	5745	15.20	17.0
	CH 157	5785	15.66	17.0
	CH 165	5825	15.46	17.0
802.11n (HT40)	CH 151	5755	15.55	17.0
	CH 159	5795	15.63	17.0
802.11ac-VHT20	CH 149	5745	15.29	17.0
	CH 157	5785	15.43	17.0
	CH 165	5825	15.62	17.0
802.11ac-VHT40	CH 151	5755	15.58	17.0
	CH 159	5795	15.78	17.0
802.11ac-VHT80	CH 155	5755	15.25	17.0
802.11ax-VHT20	CH 149	5745	14.89	17.0
	CH 157	5785	15.35	17.0
	CH 165	5825	15.30	17.0
802.11ax-VHT40	CH 151	5755	15.39	17.0
	CH 159	5795	15.47	17.0
802.11ax-VHT80	CH 155	5755	15.06	17.0

WLAN(5.8GHz)(P1) Antenna 1				
Test Mode	Channel	Frequency (MHz)	Conducted Power (dBm)	Tune-up power (dBm)
802.11a	CH 149	5745	15.29	15.5
	CH 157	5785	15.25	15.5
	CH 165	5825	15.47	15.5
802.11n (HT20)	CH 149	5745	14.11	15.5
	CH 157	5785	14.35	15.5
	CH 165	5825	14.84	15.5

802.11n (HT40)	CH 151	5755	14.47	15.5
	CH 159	5795	14.71	15.5
802.11ac-VHT20	CH 149	5745	13.99	15.5
	CH 157	5785	14.39	15.5
	CH 165	5825	14.48	15.5
802.11ac-VHT40	CH 151	5755	14.32	15.5
	CH 159	5795	14.51	15.5
802.11ac-VHT80	CH 155	5755	14.08	15.5
802.11ax-VHT20	CH 149	5745	13.47	15.5
	CH 157	5785	13.99	15.5
	CH 165	5825	14.53	15.5
802.11ax-VHT40	CH 151	5755	14.05	15.5
	CH 159	5795	14.37	15.5
802.11ax-VHT80	CH 155	5755	13.83	15.5

WLAN(5.2GHz)(P4)-Antenna 0				
Test Mode	Channel	Frequency (MHz)	Conducted Power (dBm)	Tune-up power (dBm)
802.11a	CH 36	5180	12.09	14.5
	CH 40	5200	12.72	14.5
	CH 48	5240	13.51	14.5
802.11n (HT20)	CH 36	5180	12.21	14.5
	CH 40	5200	12.41	14.5
	CH 48	5240	13.29	14.5
802.11n (HT40)	CH 38	5190	12.68	14.5
	CH 46	5230	13.25	14.5
802.11ac-VHT20	CH 36	5180	12.27	14.5
	CH 40	5200	12.30	14.5
	CH 48	5240	13.30	14.5
802.11ac-VHT40	CH 38	5190	12.39	14.5
	CH 46	5230	12.98	14.5
802.11ac-VHT80	CH42	5210	12.26	14.5
802.11ax-VHT20	CH 36	5180	14.06	14.5
	CH 40	5200	12.74	14.5
	CH 48	5240	13.45	14.5
802.11ax-VHT40	CH 38	5190	12.59	14.5
	CH 46	5230	13.40	14.5
802.11ax-VHT80	CH42	5210	12.70	14.5

WLAN(5.2GHz)(P4)-Antenna 1				
Test Mode	Channel	Frequency (MHz)	Conducted Power (dBm)	Tune-up power (dBm)
802.11a	CH 36	5180	11.79	13.0
	CH 40	5200	12.60	13.0
	CH 48	5240	12.79	13.0
802.11n (HT20)	CH 36	5180	12.04	13.0
	CH 40	5200	12.50	13.0
	CH 48	5240	12.70	13.0
802.11n (HT40)	CH 38	5190	12.33	13.0
	CH 46	5230	12.66	13.0
802.11ac-VHT20	CH 36	5180	11.98	13.0
	CH 40	5200	12.38	13.0
	CH 48	5240	12.57	13.0
802.11ac-VHT40	CH 38	5190	12.22	13.0
	CH 46	5230	12.47	13.0
802.11ac-VHT80	CH42	5210	11.88	13.0
802.11ax-VHT20	CH 36	5180	11.85	13.0
	CH 40	5200	12.33	13.0
	CH 48	5240	12.46	13.0
802.11ax-VHT40	CH 38	5190	12.33	13.0
	CH 46	5230	12.61	13.0
802.11ax-VHT80	CH42	5210	12.10	13.0

WLAN(5.3GHz)(P4) Antenna 0				
Test Mode	Channel	Frequency (MHz)	Conducted Power (dBm)	Tune-up power (dBm)
802.11a	CH 52	5260	13.29	14.0
	CH 56	5280	13.49	14.0
	CH 64	5320	13.10	14.0
802.11n (HT20)	CH 52	5260	13.11	14.0
	CH 56	5280	13.30	14.0
	CH 64	5320	12.90	14.0
802.11n (HT40)	CH 54	5270	13.12	14.0
	CH62	5310	13.13	14.0
802.11ac-VHT20	CH 52	5260	13.08	14.0
	CH 56	5280	13.21	14.0
	CH 64	5320	13.00	14.0
802.11ac-VHT40	CH 54	5270	13.21	14.0

	CH 62	5310	13.12	14.0
802.11ac-VHT80	CH 58	5290	12.77	14.0
802.11ax-VHT20	CH 52	5260	13.23	14.0
	CH 56	5280	10.72	14.0
	CH 64	5320	13.00	14.0
802.11ax-VHT40	CH 54	5270	13.52	14.0
	CH 62	5310	13.32	14.0
802.11ax-VHT80	CH 58	5290	13.11	14.0

WLAN(5.3GHz)(P4) Antenna 1				
Test Mode	Channel	Frequency (MHz)	Conducted Power (dBm)	Tune-up power (dBm)
802.11a	CH 52	5260	11.99	12.5
	CH 56	5280	12.02	12.5
	CH 64	5320	11.78	12.5
802.11n (HT20)	CH 52	5260	12.05	12.5
	CH 56	5280	11.80	12.5
	CH 64	5320	11.53	12.5
802.11n (HT40)	CH 54	5270	12.02	12.5
	CH62	5310	11.48	12.5
802.11ac-VHT20	CH 52	5260	11.88	12.5
	CH 56	5280	12.12	12.5
	CH 64	5320	11.32	12.5
802.11ac-VHT40	CH 54	5270	11.88	12.5
	CH 62	5310	11.59	12.5
802.11ac-VHT80	CH 58	5290	11.27	12.5
802.11ax-VHT20	CH 52	5260	11.96	12.5
	CH 56	5280	12.14	12.5
	CH 64	5320	11.66	12.5
802.11ax-VHT40	CH 54	5270	12.13	12.5
	CH 62	5310	11.60	12.5
802.11ax-VHT80	CH 58	5290	11.51	12.5

WLAN(5.6GHz)(P4)-Antenna 0				
Test Mode	Channel	Frequency (MHz)	Conducted Power (dBm)	Tune-up power (dBm)
802.11a	CH 100	5500	12.87	14.0
	CH 120	5600	13.01	14.0

	CH 140	5700	13.68	14.0
802.11n (HT20)	CH 100	5500	12.75	14.0
	CH 120	5600	12.76	14.0
	CH 140	5700	13.41	14.0
802.11n (HT40)	CH 102	5510	12.81	14.0
	CH118	5590	12.68	14.0
	CH134	5670	13.44	14.0
802.11ac-VHT20	CH 100	5500	12.94	14.0
	CH 120	5600	12.40	14.0
	CH 140	5700	13.45	14.0
802.11ac-VHT40	CH 102	5510	12.72	14.0
	CH118	5590	12.68	14.0
	CH134	5670	13.62	14.0
802.11ac-VHT80	CH106	5530	12.21	14.0
	CH122	5610	11.56	14.0
802.11ax-VHT20	CH 100	5500	12.76	14.0
	CH 120	5600	12.84	14.0
	CH 140	5700	13.65	14.0
802.11ax-VHT40	CH 102	5510	12.62	14.0
	CH118	5590	12.68	14.0
	CH134	5670	13.54	14.0
802.11ax-VHT80	CH106	5530	12.65	14.0
	CH122	5610	12.85	14.0

WLAN(5.6GHz)(P4)-Antenna 1				
Test Mode	Channel	Frequency (MHz)	Conducted Power (dBm)	Tune-up power (dBm)
802.11a	CH 100	5500	11.16	13.5
	CH 120	5600	12.86	13.5
	CH 140	5700	13.12	13.5
802.11n (HT20)	CH 100	5500	11.81	13.5
	CH 120	5600	12.72	13.5
	CH 140	5700	13.08	13.5
802.11n (HT40)	CH 102	5510	11.79	13.5
	CH118	5590	12.72	13.5
	CH134	5670	12.99	13.5
802.11ac-VHT20	CH 100	5500	11.78	13.5
	CH 120	5600	12.70	13.5
	CH 140	5700	13.19	13.5
802.11ac-VHT40	CH 102	5510	11.79	13.5

	CH118	5590	12.72	13.5
	CH134	5670	12.94	13.5
802.11ac-VHT80	CH106	5530	11.35	13.5
	CH122	5610	12.29	13.5
802.11ax-VHT20	CH 100	5500	11.93	13.5
	CH 120	5600	12.98	13.5
	CH 140	5700	13.23	13.5
802.11ax-VHT40	CH 102	5510	11.92	13.5
	CH118	5590	12.72	13.5
	CH134	5670	12.94	13.5
802.11ax-VHT80	CH106	5530	11.66	13.5
	CH122	5610	12.68	13.5

WLAN(5.8GHz)(P4) Antenna 0				
Test Mode	Channel	Frequency (MHz)	Conducted Power (dBm)	Tune-up power (dBm)
802.11a	CH 149	5745	13.14	13.5
	CH 157	5785	12.91	13.5
	CH 165	5825	12.77	13.5
802.11n (HT20)	CH 149	5745	13.07	13.5
	CH 157	5785	12.66	13.5
	CH 165	5825	12.65	13.5
802.11n (HT40)	CH 151	5755	13.10	13.5
	CH 159	5795	12.93	13.5
802.11ac-VHT20	CH 149	5745	13.07	13.5
	CH 157	5785	12.82	13.5
	CH 165	5825	12.69	13.5
802.11ac-VHT40	CH 151	5755	13.07	13.5
	CH 159	5795	12.85	13.5
802.11ac-VHT80	CH 155	5755	12.61	13.5
802.11ax-VHT20	CH 149	5745	13.38	13.5
	CH 157	5785	13.02	13.5
	CH 165	5825	12.84	13.5
802.11ax-VHT40	CH 151	5755	13.39	13.5
	CH 159	5795	13.08	13.5
802.11ax-VHT80	CH 155	5755	12.99	13.5

WLAN(5.8GHz)(P4) Antenna 1				
Test Mode	Channel	Frequency (MHz)	Conducted Power (dBm)	Tune-up power (dBm)
802.11a	CH 149	5745	12.94	13.5
	CH 157	5785	13.03	13.5
	CH 165	5825	13.25	13.5
802.11n (HT20)	CH 149	5745	12.87	13.5
	CH 157	5785	12.94	13.5
	CH 165	5825	12.99	13.5
802.11n (HT40)	CH 151	5755	12.74	13.5
	CH 159	5795	12.99	13.5
802.11ac-VHT20	CH 149	5745	12.54	13.5
	CH 157	5785	12.81	13.5
	CH 165	5825	13.03	13.5
802.11ac-VHT40	CH 151	5755	12.79	13.5
	CH 159	5795	12.99	13.5
802.11ac-VHT80	CH 155	5755	12.38	13.5
802.11ax-VHT20	CH 149	5745	12.78	13.5
	CH 157	5785	13.10	13.5
	CH 165	5825	13.07	13.5
802.11ax-VHT40	CH 151	5755	12.99	13.5
	CH 159	5795	13.08	13.5
802.11ax-VHT80	CH 155	5755	12.72	13.5

WLAN(5.2GHz)(P2)-Antenna 0				
Test Mode	Channel	Frequency (MHz)	Conducted Power (dBm)	Tune-up power (dBm)
802.11a	CH 36	5180	11.45	13.0
	CH 40	5200	11.96	13.0
	CH 48	5240	12.85	13.0
802.11n (HT20)	CH 36	5180	11.38	13.0
	CH 40	5200	11.69	13.0
	CH 48	5240	12.42	13.0
802.11n (HT40)	CH 38	5190	11.81	13.0
	CH 46	5230	12.45	13.0
802.11ac-VHT20	CH 36	5180	11.34	13.0
	CH 40	5200	11.77	13.0
	CH 48	5240	12.52	13.0

802.11ac-VHT40	CH 38	5190	11.56	13.0
	CH 46	5230	12.20	13.0
802.11ac-VHT80	CH42	5210	11.40	13.0
802.11ax-VHT20	CH 36	5180	11.73	13.0
	CH 40	5200	12.43	13.0
	CH 48	5240	12.93	13.0
802.11ax-VHT40	CH 38	5190	11.84	13.0
	CH 46	5230	12.57	13.0
802.11ax-VHT80	CH42	5210	11.99	13.0

WLAN(5.2GHz)(P2)-Antenna 1				
Test Mode	Channel	Frequency (MHz)	Conducted Power (dBm)	Tune-up power (dBm)
802.11a	CH 36	5180	11.86	14.0
	CH 40	5200	12.71	14.0
	CH 48	5240	13.00	14.0
802.11n (HT20)	CH 36	5180	12.32	14.0
	CH 40	5200	12.59	14.0
	CH 48	5240	12.96	14.0
802.11n (HT40)	CH 38	5190	12.91	14.0
	CH 46	5230	13.32	14.0
802.11ac-VHT20	CH 36	5180	12.11	14.0
	CH 40	5200	12.69	14.0
	CH 48	5240	12.70	14.0
802.11ac-VHT40	CH 38	5190	12.59	14.0
	CH 46	5230	13.17	14.0
802.11ac-VHT80	CH42	5210	12.51	14.0
802.11ax-VHT20	CH 36	5180	12.48	14.0
	CH 40	5200	13.35	14.0
	CH 48	5240	13.32	14.0
802.11ax-VHT40	CH 38	5190	12.46	14.0
	CH 46	5230	13.50	14.0
802.11ax-VHT80	CH42	5210	12.62	14.0

WLAN(5.3GHz)(P2) Antenna 0				
Test Mode	Channel	Frequency (MHz)	Conducted Power (dBm)	Tune-up power (dBm)
802.11a	CH 52	5260	12.80	13.0
	CH 56	5280	12.95	13.0
	CH 64	5320	12.70	13.0
802.11n (HT20)	CH 52	5260	12.55	13.0
	CH 56	5280	12.75	13.0
	CH 64	5320	12.42	13.0
802.11n (HT40)	CH 54	5270	12.53	13.0
	CH62	5310	12.58	13.0
802.11ac-VHT20	CH 52	5260	12.51	13.0
	CH 56	5280	12.52	13.0
	CH 64	5320	12.40	13.0
802.11ac-VHT40	CH 54	5270	12.50	13.0
	CH 62	5310	12.48	13.0
802.11ac-VHT80	CH 58	5290	12.20	13.0
802.11ax-VHT20	CH 52	5260	12.52	13.0
	CH 56	5280	12.82	13.0
	CH 64	5320	12.49	13.0
802.11ax-VHT40	CH 54	5270	12.65	13.0
	CH 62	5310	12.49	13.0
802.11ax-VHT80	CH 58	5290	12.36	13.0

WLAN(5.3GHz)(P2) Antenna 1				
Test Mode	Channel	Frequency (MHz)	Conducted Power (dBm)	Tune-up power (dBm)
802.11a	CH 52	5260	12.07	13.5
	CH 56	5280	13.18	13.5
	CH 64	5320	12.73	13.5
802.11n (HT20)	CH 52	5260	12.71	13.5
	CH 56	5280	12.80	13.5
	CH 64	5320	11.96	13.5
802.11n (HT40)	CH 54	5270	12.84	13.5
	CH62	5310	12.53	13.5
802.11ac-VHT20	CH 52	5260	11.99	13.5
	CH 56	5280	12.78	13.5

	CH 64	5320	12.41	13.5
802.11ac-VHT40	CH 54	5270	12.38	13.5
	CH 62	5310	12.45	13.5
802.11ac-VHT80	CH 58	5290	11.69	13.5
802.11ax-VHT20	CH 52	5260	12.09	13.5
	CH 56	5280	12.71	13.5
	CH 64	5320	12.19	13.5
802.11ax-VHT40	CH 54	5270	12.76	13.5
	CH 62	5310	12.94	13.5
802.11ax-VHT80	CH 58	5290	12.95	13.5

WLAN(5.6GHz)(P2)-Antenna 0				
Test Mode	Channel	Frequency (MHz)	Conducted Power (dBm)	Tune-up power (dBm)
802.11a	CH 100	5500	12.19	13.5
	CH 120	5600	12.33	13.5
	CH 140	5700	13.22	13.5
802.11n (HT20)	CH 100	5500	12.08	13.5
	CH 120	5600	12.05	13.5
	CH 140	5700	12.60	13.5
802.11n (HT40)	CH 102	5510	11.83	13.5
	CH118	5590	11.83	13.5
	CH134	5670	12.88	13.5
802.11ac-VHT20	CH 100	5500	12.05	13.5
	CH 120	5600	11.98	13.5
	CH 140	5700	12.91	13.5
802.11ac-VHT40	CH 102	5510	12.13	13.5
	CH118	5590	11.83	13.5
	CH134	5670	13.04	13.5
802.11ac-VHT80	CH106	5530	11.73	13.5
	CH122	5610	11.94	13.5
802.11ax-VHT20	CH 100	5500	12.36	13.5
	CH 120	5600	12.11	13.5
	CH 140	5700	13.27	13.5
802.11ax-VHT40	CH 102	5510	12.36	13.5
	CH118	5590	11.83	13.5
	CH134	5670	13.33	13.5
802.11ax-VHT80	CH106	5530	11.97	13.5
	CH122	5610	12.22	13.5

WLAN(5.6GHz)(P2)-Antenna 1				
Test Mode	Channel	Frequency (MHz)	Conducted Power (dBm)	Tune-up power (dBm)
802.11a	CH 100	5500	12.17	14.5
	CH 120	5600	13.77	14.5
	CH 140	5700	13.81	14.5
802.11n (HT20)	CH 100	5500	12.79	14.5
	CH 120	5600	13.31	14.5
	CH 140	5700	13.12	14.5
802.11n (HT40)	CH 102	5510	13.15	14.5
	CH118	5590	14.27	14.5
	CH134	5670	13.32	14.5
802.11ac-VHT20	CH 100	5500	12.62	14.5
	CH 120	5600	12.71	14.5
	CH 140	5700	13.20	14.5
802.11ac-VHT40	CH 102	5510	12.38	14.5
	CH118	5590	14.27	14.5
	CH134	5670	13.61	14.5
802.11ac-VHT80	CH106	5530	12.34	14.5
	CH122	5610	12.72	14.5
802.11ax-VHT20	CH 100	5500	12.39	14.5
	CH 120	5600	13.46	14.5
	CH 140	5700	14.44	14.5
802.11ax-VHT40	CH 102	5510	12.88	14.5
	CH118	5590	14.27	14.5
	CH134	5670	14.02	14.5
802.11ax-VHT80	CH106	5530	12.57	14.5
	CH122	5610	13.68	14.5

WLAN(5.8GHz)(P2) Antenna 0				
Test Mode	Channel	Frequency (MHz)	Conducted Power (dBm)	Tune-up power (dBm)
802.11a	CH 149	5745	12.58	13.0
	CH 157	5785	12.52	13.0
	CH 165	5825	12.26	13.0
802.11n (HT20)	CH 149	5745	12.61	13.0
	CH 157	5785	12.02	13.0
	CH 165	5825	12.00	13.0

802.11n (HT40)	CH 151	5755	12.51	13.0
	CH 159	5795	12.29	13.0
802.11ac-VHT20	CH 149	5745	12.45	13.0
	CH 157	5785	12.20	13.0
	CH 165	5825	12.05	13.0
802.11ac-VHT40	CH 151	5755	12.61	13.0
	CH 159	5795	12.19	13.0
802.11ac-VHT80	CH 155	5755	12.10	13.0
802.11ax-VHT20	CH 149	5745	12.73	13.0
	CH 157	5785	12.67	13.0
	CH 165	5825	12.42	13.0
802.11ax-VHT40	CH 151	5755	12.97	13.0
	CH 159	5795	12.63	13.0
802.11ax-VHT80	CH 155	5755	12.44	13.0

WLAN(5.8GHz)(P2) Antenna 1				
Test Mode	Channel	Frequency (MHz)	Conducted Power (dBm)	Tune-up power (dBm)
802.11a	CH 149	5745	12.77	14.0
	CH 157	5785	13.20	14.0
	CH 165	5825	13.22	14.0
802.11n (HT20)	CH 149	5745	13.40	14.0
	CH 157	5785	13.60	14.0
	CH 165	5825	13.66	14.0
802.11n (HT40)	CH 151	5755	13.47	14.0
	CH 159	5795	13.56	14.0
802.11ac-VHT20	CH 149	5745	13.09	14.0
	CH 157	5785	13.33	14.0
	CH 165	5825	13.65	14.0
802.11ac-VHT40	CH 151	5755	13.26	14.0
	CH 159	5795	13.52	14.0
802.11ac-VHT80	CH 155	5755	13.01	14.0
802.11ax-VHT20	CH 149	5745	13.47	14.0
	CH 157	5785	13.46	14.0
	CH 165	5825	13.25	14.0
802.11ax-VHT40	CH 151	5755	13.82	14.0
	CH 159	5795	13.83	14.0
802.11ax-VHT80	CH 155	5755	12.91	14.0

WLAN(5.2GHz)(P3)-Antenna 0				
Test Mode	Channel	Frequency (MHz)	Conducted Power (dBm)	Tune-up power (dBm)
802.11a	CH 36	5180	11.90	13.5
	CH 40	5200	12.57	13.5
	CH 48	5240	13.49	13.5
802.11n (HT20)	CH 36	5180	12.02	13.5
	CH 40	5200	12.38	13.5
	CH 48	5240	13.15	13.5
802.11n (HT40)	CH 38	5190	12.30	13.5
	CH 46	5230	13.09	13.5
802.11ac-VHT20	CH 36	5180	11.84	13.5
	CH 40	5200	12.39	13.5
	CH 48	5240	13.15	13.5
802.11ac-VHT40	CH 38	5190	12.29	13.5
	CH 46	5230	13.04	13.5
802.11ac-VHT80	CH42	5210	12.14	13.5
802.11ax-VHT20	CH 36	5180	12.12	13.5
	CH 40	5200	12.60	13.5
	CH 48	5240	13.36	13.5
802.11ax-VHT40	CH 38	5190	12.62	13.5
	CH 46	5230	13.32	13.5
802.11ax-VHT80	CH42	5210	12.61	13.5

WLAN(5.2GHz)(P3)-Antenna 1				
Test Mode	Channel	Frequency (MHz)	Conducted Power (dBm)	Tune-up power (dBm)
802.11a	CH 36	5180	11.97	13.0
	CH 40	5200	12.64	13.0
	CH 48	5240	12.90	13.0
802.11n (HT20)	CH 36	5180	11.85	13.0
	CH 40	5200	12.42	13.0
	CH 48	5240	12.76	13.0
802.11n (HT40)	CH 38	5190	12.06	13.0
	CH 46	5230	12.53	13.0
802.11ac-VHT20	CH 36	5180	12.07	13.0
	CH 40	5200	11.95	13.0
	CH 48	5240	12.56	13.0

802.11ac-VHT40	CH 38	5190	11.78	13.0
	CH 46	5230	12.63	13.0
802.11ac-VHT80	CH42	5210	11.95	13.0
802.11ax-VHT20	CH 36	5180	11.99	13.0
	CH 40	5200	12.66	13.0
	CH 48	5240	12.89	13.0
802.11ax-VHT40	CH 38	5190	12.41	13.0
	CH 46	5230	12.86	13.0
802.11ax-VHT80	CH42	5210	12.17	13.0

WLAN(5.8GHz)(P3) Antenna 0				
Test Mode	Channel	Frequency (MHz)	Conducted Power (dBm)	Tune-up power (dBm)
802.11a	CH 149	5745	13.07	13.5
	CH 157	5785	13.13	13.5
	CH 165	5825	12.98	13.5
802.11n (HT20)	CH 149	5745	13.29	13.5
	CH 157	5785	12.89	13.5
	CH 165	5825	12.68	13.5
802.11n (HT40)	CH 151	5755	13.19	13.5
	CH 159	5795	13.07	13.5
802.11ac-VHT20	CH 149	5745	12.83	13.5
	CH 157	5785	12.93	13.5
	CH 165	5825	12.74	13.5
802.11ac-VHT40	CH 151	5755	13.17	13.5
	CH 159	5795	12.97	13.5
802.11ac-VHT80	CH 155	5755	12.75	13.5
802.11ax-VHT20	CH 149	5745	13.35	13.5
	CH 157	5785	13.17	13.5
	CH 165	5825	13.00	13.5
802.11ax-VHT40	CH 151	5755	13.48	13.5
	CH 159	5795	13.27	13.5
802.11ax-VHT80	CH 155	5755	13.04	13.5

WLAN(5.8GHz)(P3) Antenna 1				
Test Mode	Channel	Frequency (MHz)	Conducted Power (dBm)	Tune-up power (dBm)
802.11a	CH 149	5745	13.22	14.0
	CH 157	5785	13.23	14.0
	CH 165	5825	13.50	14.0
802.11n (HT20)	CH 149	5745	12.92	14.0
	CH 157	5785	13.09	14.0
	CH 165	5825	12.77	14.0
802.11n (HT40)	CH 151	5755	13.07	14.0
	CH 159	5795	13.41	14.0
802.11ac-VHT20	CH 149	5745	12.93	14.0
	CH 157	5785	13.20	14.0
	CH 165	5825	13.39	14.0
802.11ac-VHT40	CH 151	5755	12.90	14.0
	CH 159	5795	13.19	14.0
802.11ac-VHT80	CH 155	5755	12.80	14.0
802.11ax-VHT20	CH 149	5745	13.60	14.0
	CH 157	5785	13.63	14.0
	CH 165	5825	13.78	14.0
802.11ax-VHT40	CH 151	5755	12.85	14.0
	CH 159	5795	13.37	14.0
802.11ax-VHT80	CH 155	5755	13.01	14.0

WLAN(2.4GHz)(P1) Antenna 0					
Test Mode	Data Rate	Channel	Frequency (MHz)	Conducted Power (dBm)	Tune-up power (dBm)
802.11b	1Mbps	CH 01	2412	20.31	21.0
		CH 06	2437	20.91	21.0
		CH 11	2462	20.83	21.0
802.11g	6Mbps	CH 01	2412	19.24	21.0
		CH 06	2437	19.94	21.0
		CH 11	2462	19.88	21.0
802.11n (20MHz)	MCS0	CH 01	2412	18.34	21.0
		CH 06	2437	18.91	21.0
		CH 11	2462	19.10	21.0
802.11n (40MHz)	MCS0	CH 03	2422	16.63	21.0
		CH 06	2437	17.24	21.0
		CH 09	2452	17.41	21.0

802.11ax-HE20	MCS0	CH 01	2412	18.91	21.0
		CH 06	2437	19.68	21.0
		CH 11	2462	19.74	21.0
802.11ax-HE40	MCS0	CH 03	2422	17.16	21.0
		CH 06	2437	17.74	21.0
		CH 09	2452	18.14	21.0

WLAN(2.4GHz)(P4) Antenna 0					
Test Mode	Data Rate	Channel	Frequency (MHz)	Conducted Power (dBm)	Tune-up power (dBm)
802.11b	1Mbps	CH 01	2412	16.92	18.0
		CH 06	2437	16.99	18.0
		CH 11	2462	16.86	18.0
802.11g	6Mbps	CH 01	2412	16.14	18.0
		CH 06	2437	16.79	18.0
		CH 11	2462	17.13	18.0
802.11n (20MHz)	MCS0	CH 01	2412	16.27	18.0
		CH 06	2437	16.43	18.0
		CH 11	2462	16.85	18.0
802.11n (40MHz)	MCS0	CH 03	2422	14.57	18.0
		CH 06	2437	14.91	18.0
		CH 09	2452	15.34	18.0
802.11ax-HE20	MCS0	CH 01	2412	17.10	18.0
		CH 06	2437	17.99	18.0
		CH 11	2462	17.78	18.0
802.11ax-HE40	MCS0	CH 03	2422	15.74	18.0
		CH 06	2437	16.11	18.0
		CH 09	2452	16.62	18.0

WLAN(2.4GHz)(P2) Antenna 0					
Test Mode	Data Rate	Channel	Frequency (MHz)	Conducted Power (dBm)	Tune-up power (dBm)
802.11b	1Mbps	CH 01	2412	15.69	16.5
		CH 06	2437	16.15	16.5
		CH 11	2462	16.09	16.5
802.11g	6Mbps	CH 01	2412	15.58	16.5
		CH 06	2437	16.39	16.5
		CH 11	2462	16.23	16.5
802.11n (20MHz)	MCS0	CH 01	2412	15.53	16.5
		CH 06	2437	16.10	16.5

		CH 11	2462	16.11	16.5
802.11n (40MHz)	MCS0	CH 03	2422	13.85	16.5
		CH 06	2437	14.25	16.5
		CH 09	2452	14.83	16.5
802.11ax-HE20	MCS0	CH 01	2412	16.93	18.0
		CH 06	2437	17.59	18.0
		CH 11	2462	17.80	18.0
802.11ax-HE40	MCS0	CH 03	2422	15.36	16.5
		CH 06	2437	15.75	16.5
		CH 09	2452	16.12	16.5

WLAN(2.4GHz)(P3) Antenna 0					
Test Mode	Data Rate	Channel	Frequency (MHz)	Conducted Power (dBm)	Tune-up power (dBm)
802.11b	1Mbps	CH 01	2412	17.46	18.0
		CH 06	2437	17.96	18.0
		CH 11	2462	17.73	18.0
802.11g	6Mbps	CH 01	2412	17.56	18.0
		CH 06	2437	17.92	18.0
		CH 11	2462	17.80	18.0
802.11n (20MHz)	MCS0	CH 01	2412	17.22	18.0
		CH 06	2437	17.98	18.0
		CH 11	2462	17.82	18.0
802.11n (40MHz)	MCS0	CH 03	2422	15.62	18.0
		CH 06	2437	16.15	18.0
		CH 09	2452	16.46	18.0
802.11ax-HE20	MCS0	CH 01	2412	18.83	20.0
		CH 06	2437	19.23	20.0
		CH 11	2462	19.51	20.0
802.11ax-HE40	MCS0	CH 03	2422	17.19	20.0
		CH 06	2437	17.71	20.0
		CH 09	2452	18.26	20.0

WLAN(2.4GHz)(P1) -Antenna 1					
Test Mode	Data Rate	Channel	Frequency (MHz)	Conducted Power (dBm)	Tune-up power (dBm)
802.11b	1Mbps	CH 01	2412	21.08	22.5
		CH 06	2437	21.01	22.5
		CH 11	2462	22.01	22.5

802.11g	6Mbps	CH 01	2412	19.72	22.5
		CH 06	2437	19.66	22.5
		CH 11	2462	20.55	22.5
802.11n (20MHz)	MCS0	CH 01	2412	18.72	22.5
		CH 06	2437	18.42	22.5
		CH 11	2462	19.74	22.5
802.11n (40MHz)	MCS0	CH 03	2422	16.43	22.5
		CH 06	2437	16.65	22.5
		CH 09	2452	17.71	22.5
802.11ax-HE20	MCS0	CH 01	2412	19.16	22.5
		CH 06	2437	19.10	22.5
		CH 11	2462	20.22	22.5
802.11ax-HE40	MCS0	CH 03	2422	17.14	22.5
		CH 06	2437	17.10	22.5
		CH 09	2452	18.19	22.5

WLAN(2.4GHz)(P4) -Antenna 1					
Test Mode	Data Rate	Channel	Frequency (MHz)	Conducted Power (dBm)	Tune-up power (dBm)
802.11b	1Mbps	CH 01	2412	17.65	19.5
		CH 06	2437	17.35	19.5
		CH 11	2462	18.37	19.5
802.11g	6Mbps	CH 01	2412	17.26	19.5
		CH 06	2437	17.22	19.5
		CH 11	2462	18.35	19.5
802.11n (20MHz)	MCS0	CH 01	2412	17.23	19.5
		CH 06	2437	17.29	19.5
		CH 11	2462	17.81	19.5
802.11n (40MHz)	MCS0	CH 03	2422	14.57	19.5
		CH 06	2437	14.88	19.5
		CH 09	2452	15.79	19.5
802.11ax-HE20	MCS0	CH 01	2412	18.51	19.5
		CH 06	2437	18.07	19.5
		CH 11	2462	19.26	19.5
802.11ax-HE40	MCS0	CH 03	2422	16.10	19.5
		CH 06	2437	16.43	19.5
		CH 09	2452	17.40	19.5

WLAN(2.4GHz)(P2) -Antenna 1					
Test Mode	Data Rate	Channel	Frequency (MHz)	Conducted Power (dBm)	Tune-up power (dBm)
802.11b	1Mbps	CH 01	2412	18.01	19.5
		CH 06	2437	17.91	19.5
		CH 11	2462	19.04	19.5
802.11g	6Mbps	CH 01	2412	17.86	19.5
		CH 06	2437	17.84	19.5
		CH 11	2462	18.85	19.5
802.11n (20MHz)	MCS0	CH 01	2412	17.78	19.5
		CH 06	2437	17.58	19.5
		CH 11	2462	18.54	19.5
802.11n (40MHz)	MCS0	CH 03	2422	15.60	19.5
		CH 06	2437	15.71	19.5
		CH 09	2452	16.76	19.5
802.11ax-HE20	MCS0	CH 01	2412	19.25	20.5
		CH 06	2437	19.05	20.5
		CH 11	2462	20.10	20.5
802.11ax-HE40	MCS0	CH 03	2422	17.05	19.5
		CH 06	2437	17.12	19.5
		CH 09	2452	18.23	19.5

WLAN(2.4GHz)(P3) -Antenna 1					
Test Mode	Data Rate	Channel	Frequency (MHz)	Conducted Power (dBm)	Tune-up power (dBm)
802.11b	1Mbps	CH 01	2412	18.10	19.0
		CH 06	2437	17.88	19.0
		CH 11	2462	18.77	19.0
802.11g	6Mbps	CH 01	2412	17.92	19.0
		CH 06	2437	17.69	19.0
		CH 11	2462	18.69	19.0
802.11n (20MHz)	MCS0	CH 01	2412	17.67	19.0
		CH 06	2437	17.41	19.0
		CH 11	2462	18.57	19.0
802.11n (40MHz)	MCS0	CH 03	2422	15.76	19.0
		CH 06	2437	15.65	19.0
		CH 09	2452	16.75	19.0
802.11ax-HE20	MCS0	CH 01	2412	18.75	20.0
		CH 06	2437	18.90	20.0

		CH 11	2462	19.72	20.0
802.11ax-HE40	MCS0	CH 03	2422	17.12	19.0
		CH 06	2437	17.28	19.0
		CH 09	2452	18.26	19.0

Remark:

- Per KDB 248227 D01 v02r02, for 802.11b DSSS SAR measurements, DSSS SAR procedure applies to fixed exposure test position and initial test position procedure applies to multiple exposure test positions.
- Per KDB 248227 D01 v02r02, For 802.11b DSSS SAR measurements ,when the reported SAR of the highest measured maximum output power channel (see 3.1) for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration. When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.
- .For OFDM modes (802.11g/n), SAR is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and it is ≤ 1.2 W/kg.
- Per KDB 248227 D01 v02r02, When multiple channel bandwidth configurations in a frequency band have the same specified maximum output power, the initial test configuration is determined by applying the following steps sequentially.
 - 1) The largest channel bandwidth configuration is selected among the multiple configurations in a frequency band with the same specified maximum output power.
 - 2) If multiple configurations have the same specified maximum output power and largest channel bandwidth, the lowest order modulation among the largest channel bandwidth configurations is selected.
 - 3) If multiple configurations have the same specified maximum output power, largest channel bandwidth and lowest order modulation, the lowest data rate configuration among these configurations is selected.
 - 4) When multiple transmission modes (802.11a/g/n/ac) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, the lowest order 802.11 mode is selected; i.e., 802.11a is chosen over 802.11n then 802.11ac or 802.11g is chosen over 802.11n.

Test Mode	Data Rate	Channel	Conducted Power (dBm)	Tune-up power (dBm)
GFSK	1Mbps	Low	14.67	16.0
		Middle	15.50	16.0
		High	14.46	16.0
Pi/4 QDPSK	2Mbps	Low	14.48	15.5
		Middle	15.12	15.5
		High	14.11	15.5
8DPSK	3Mbps	Low	14.66	15.5
		Middle	15.45	15.5
		High	14.66	15.5

Bluetooth					
Test Mode	Data Rate	Channel	Frequency (MHz)	Conducted Power (dBm)	Tune-up power (dBm)
BLE	1Mbps	CH 00	2402	-7.50	-5.5
		CH 19	2440	-6.00	-5.5
		CH 39	2480	-6.27	-5.5
	2Mbps	CH 00	2402	-7.47	-6
		CH 19	2440	-6.03	-6
		CH 39	2480	-6.37	-6

NFC				
Test Mode	Channel(MHz)	Max. Field Strength(dBuV/m)	Conducted Power (dBm)	Tune- up power (dBm)
NFC	13.56	59.02	-47.98	-47

Remark:

NFC maximum output power is 6.518dBm *respectively*, and Maximum Tune-Up output power is 7.0dBm *respectively*,. Per KDB 447498 D01 V06, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR, 16 where}$$

- f(GHz) is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation¹⁷
- The result is rounded to one decimal place for comparison

NFC:

Tune-Up Power (dBm)	Max. Power (nW)	Distance (mm)	Frequency (GHz)	Result	Limit
-47	19.95	5	0.01356	0.001	3

The exclusion thresholds is 0.001 < 3, therefore, the RF exposure evaluation is not required.

9.2 Test Results for Standalone SAR Test

Head SAR

GSM850 – Head SAR Test									
Plot No.	Mode	Test Position	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
1.	GSM	Right Cheek	128	824.2	32.68	33.0	1.076	0.407	0.438
	GSM	Right Tilted	128	824.2	32.68	33.0	1.076	0.367	0.395
	GSM	Left Cheek	128	824.2	32.68	33.0	1.076	0.355	0.382
	GSM	Left Tilted	128	824.2	32.68	33.0	1.076	0.316	0.340

GSM1900(P2) – Head SAR Test									
Plot No.	Mode	Test Position	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
2.	GSM	Right Cheek	661	1880	21.73	22.0	1.064	0.242	0.258
	GSM	Right Tilted	661	1880	21.73	22.0	1.064	0.217	0.231
	GSM	Left Cheek	661	1880	21.73	22.0	1.064	0.179	0.190
	GSM	Left Tilted	661	1880	21.73	22.0	1.064	0.145	0.154

GPRS850 – Head SAR Test									
Plot No.	Mode	Test Position	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
3.	GPRS_4TX	Right Cheek	128	824.2	28.58	29.0	1.102	0.622	0.685
	GPRS_4TX	Right Tilted	128	824.2	28.58	29.0	1.102	0.577	0.636
	GPRS_4TX	Left Cheek	128	824.2	28.58	29.0	1.102	0.350	0.386
	GPRS_4TX	Left Tilted	128	824.2	28.58	29.0	1.102	0.328	0.361

GPRS1900(P2) – Head SAR Test									
Plot No.	Mode	Test Position	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	M Hz					
4.	GPRS_2TX	Right Cheek	661	1880	20.82	21.0	1.042	0.347	0.362
	GPRS_2TX	Right Tilted	661	1880	20.82	21.0	1.042	0.298	0.311
	GPRS_2TX	Left Cheek	661	1880	20.82	21.0	1.042	0.287	0.299
	GPRS_2TX	Left Tilted	661	1880	20.82	21.0	1.042	0.253	0.264

WCDMA Band 2(P2) – Head SAR Test									
Plot No.	Mode	Test Position	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
5.	RMC	Right Cheek	9400	1880.0	13.11	13.5	1.094	0.281	0.307
	RMC	Right Tilted	9400	1880.0	13.11	13.5	1.094	0.251	0.275
	RMC	Left Cheek	9400	1880.0	13.11	13.5	1.094	0.156	0.171
	RMC	Left Tilted	9400	1880.0	13.11	13.5	1.094	0.136	0.149

WCDMA Band 4(P2) – Head SAR Test									
Plot No.	Mode	Test Position	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
6.	RMC	Right Cheek	1312	1712.4	14.73	15.0	1.064	0.362	0.385
	RMC	Right Tilted	1312	1712.4	14.73	15.0	1.064	0.314	0.334
	RMC	Left Cheek	1312	1712.4	14.73	15.0	1.064	0.231	0.246
	RMC	Left Tilted	1312	1712.4	14.73	15.0	1.064	0.209	0.222

WCDMA Band 5 – Head SAR Test									
Plot No.	Mode	Test Position	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
	RMC	Right Cheek	4233	846.6	22.83	23.0	1.040	0.349	0.363
	RMC	Right Tilted	4233	846.6	22.83	23.0	1.040	0.317	0.330
7.	RMC	Left Cheek	4233	846.6	22.83	23.0	1.040	0.405	0.421
	RMC	Left Tilted	4233	846.6	22.83	23.0	1.040	0.378	0.393

LTE Band 2(P2)– Head SAR Test									
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)	
	Modulation, Bandwidth, RB		MHz						
8.	QPSK 20MHz 1RB	Right Cheek	1880	12.39	12.5	1.026	0.309	0.317	
	QPSK 20MHz 1RB	Right Tilted	1880	12.39	12.5	1.026	0.275	0.282	
	QPSK 20MHz 1RB	Left Cheek	1880	12.39	12.5	1.026	0.137	0.141	
	QPSK 20MHz 1RB	Left Tilted	1880	12.39	12.5	1.026	0.112	0.115	
	QPSK 20MHz 50%RB	Right Cheek	1880	12.39	12.5	1.026	0.259	0.266	
	QPSK 20MHz 50%RB	Right Tilted	1880	12.39	12.5	1.026	0.227	0.233	
	QPSK 20MHz 50%RB	Left Cheek	1880	12.39	12.5	1.026	0.133	0.136	
	QPSK 20MHz 50%RB	Left Tilted	1880	12.39	12.5	1.026	0.115	0.118	

LTE Band 4(P2)– Head SAR Test								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
9.	QPSK 20MHz 1RB	Right Cheek	1720	13.89	14.0	1.026	0.284	0.291
	QPSK 20MHz 1RB	Right Tilted	1720	13.89	14.0	1.026	0.257	0.264
	QPSK 20MHz 1RB	Left Cheek	1720	13.89	14.0	1.026	0.186	0.191
	QPSK 20MHz 1RB	Left Tilted	1720	13.89	14.0	1.026	0.159	0.163
	QPSK 20MHz 50%RB	Right Cheek	1720	13.89	14.0	1.026	0.275	0.282
	QPSK 20MHz 50%RB	Right Tilted	1720	13.89	14.0	1.026	0.234	0.240
	QPSK 20MHz 50%RB	Left Cheek	1720	13.89	14.0	1.026	0.183	0.188
	QPSK 20MHz 50%RB	Left Tilted	1720	13.89	14.0	1.026	0.158	0.162

LTE Band 5 Head SAR Test								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
10.	QPSK 10MHz 1RB	Right Cheek	836.5	22.36	22.5	1.033	0.585	0.604
	QPSK 10MHz 1RB	Right Tilted	836.5	22.36	22.5	1.033	0.546	0.564
	QPSK 10MHz 1RB	Left Cheek	836.5	22.36	22.5	1.033	0.619	0.639
	QPSK 10MHz 1RB	Left Tilted	836.5	22.36	22.5	1.033	0.582	0.601
	QPSK 10MHz 50%RB	Right Cheek	836.5	22.36	22.5	1.033	0.509	0.526
	QPSK 10MHz 50%RB	Right Tilted	836.5	22.36	22.5	1.033	0.479	0.495
	QPSK 10MHz 50%RB	Left Cheek	836.5	22.36	22.5	1.033	0.514	0.531
	QPSK 10MHz 50%RB	Left Tilted	836.5	22.36	22.5	1.033	0.476	0.492

LTE Band 12– Head SAR Test								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
11.	QPSK 10MHz 1RB	Right Cheek	711	22.49	22.5	1.002	0.507	0.508
	QPSK 10MHz 1RB	Right Tilted	711	22.49	22.5	1.002	0.461	0.462
	QPSK 10MHz 1RB	Left Cheek	711	22.49	22.5	1.002	0.468	0.469
	QPSK 10MHz 1RB	Left Tilted	711	22.49	22.5	1.002	0.427	0.428
	QPSK 10MHz 50%RB	Right Cheek	711	22.49	22.5	1.002	0.408	0.409
	QPSK 10MHz 50%RB	Right Tilted	711	22.49	22.5	1.002	0.379	0.380
	QPSK 10MHz 50%RB	Left Cheek	711	22.49	22.5	1.002	0.393	0.394
	QPSK 10MHz 50%RB	Left Tilted	711	22.49	22.5	1.002	0.352	0.353

LTE Band 13– Head SAR Test								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
	QPSK 10MHz 1RB	Right Cheek	782	22.58	23.0	1.102	0.656	0.723
	QPSK 10MHz 1RB	Right Tilted	782	22.58	23.0	1.102	0.627	0.691
12.	QPSK 10MHz 1RB	Left Cheek	782	22.58	23.0	1.102	0.666	0.734
	QPSK 10MHz 1RB	Left Tilted	782	22.58	23.0	1.102	0.631	0.695
	QPSK 10MHz 50%RB	Right Cheek	782	22.58	23.0	1.102	0.510	0.562
	QPSK 10MHz 50%RB	Right Tilted	782	22.58	23.0	1.102	0.582	0.641
	QPSK 10MHz 50%RB	Left Cheek	782	22.58	23.0	1.102	0.540	0.595
	QPSK 10MHz 50%RB	Left Tilted	782	22.58	23.0	1.102	0.518	0.571

LTE Band 17– Head SAR Test								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
13.	QPSK 10MHz 1RB	Right Cheek	710	22.47	22.50	1.007	0.499	0.502
	QPSK 10MHz 1RB	Right Tilted	710	22.47	22.50	1.007	0.465	0.468
	QPSK 10MHz 1RB	Left Cheek	710	22.47	22.50	1.007	0.467	0.470
	QPSK 10MHz 1RB	Left Tilted	710	22.47	22.50	1.007	0.428	0.431
	QPSK 10MHz 50%RB	Right Cheek	710	22.47	22.50	1.007	0.392	0.395
	QPSK 10MHz 50%RB	Right Tilted	710	22.47	22.50	1.007	0.367	0.370
	QPSK 10MHz 50%RB	Left Cheek	710	22.47	22.50	1.007	0.377	0.380
	QPSK 10MHz 50%RB	Left Tilted	710	22.47	22.50	1.007	0.343	0.345

LTE Band 25(P2)– Head SAR Test								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
14.	QPSK 20MHz 1RB	Right Cheek	1882.5	12.56	13.0	1.107	0.294	0.325
	QPSK 20MHz 1RB	Right Tilted	1882.5	12.56	13.0	1.107	0.257	0.284
	QPSK 20MHz 1RB	Left Cheek	1882.5	12.56	13.0	1.107	0.136	0.151
	QPSK 20MHz 1RB	Left Tilted	1882.5	12.56	13.0	1.107	0.109	0.121
	QPSK 20MHz 50%RB	Right Cheek	1882.5	12.56	13.0	1.107	0.263	0.291
	QPSK 20MHz 50%RB	Right Tilted	1882.5	12.56	13.0	1.107	0.228	0.252
	QPSK 20MHz 50%RB	Left Cheek	1882.5	12.56	13.0	1.107	0.126	0.139
	QPSK 20MHz 50%RB	Left Tilted	1882.5	12.56	13.0	1.107	0.101	0.112

LTE Band 26(814-824MHz)– Head SAR Test								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
	QPSK 15MHz 1RB	Right Cheek	819	22.59	23.0	1.099	0.515	0.566
	QPSK 15MHz 1RB	Right Tilted	819	22.59	23.0	1.099	0.468	0.514
15.	QPSK 15MHz 1RB	Left Cheek	819	22.59	23.0	1.099	0.554	0.609
	QPSK 15MHz 1RB	Left Tilted	819	22.59	23.0	1.099	0.497	0.546
	QPSK 15MHz 50%RB	Right Cheek	819	22.59	23.0	1.099	0.414	0.455
	QPSK 15MHz 50%RB	Right Tilted	819	22.59	23.0	1.099	0.375	0.412
	QPSK 15MHz 50%RB	Left Cheek	819	22.59	23.0	1.099	0.428	0.470
	QPSK 15MHz 50%RB	Left Tilted	819	22.59	23.0	1.099	0.396	0.435

LTE Band 26(824-849MHz)– Head SAR Test								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
16.	QPSK 10MHz 1RB	Right Cheek	831	22.49	22.5	1.002	0.490	0.491
	QPSK 10MHz 1RB	Right Tilted	831	22.49	22.5	1.002	0.458	0.459
	QPSK 10MHz 1RB	Left Cheek	831	22.49	22.5	1.002	0.386	0.387
	QPSK 10MHz 1RB	Left Tilted	831	22.49	22.5	1.002	0.347	0.348
	QPSK 10MHz 50%RB	Right Cheek	831	22.49	22.5	1.002	0.429	0.430
	QPSK 10MHz 50%RB	Right Tilted	831	22.49	22.5	1.002	0.395	0.396
	QPSK 10MHz 50%RB	Left Cheek	831	22.49	22.5	1.002	0.312	0.313
	QPSK 10MHz 50%RB	Left Tilted	831	22.49	22.5	1.002	0.275	0.276

LTE Band 41– Head SAR Test								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
	QPSK 20MHz 1RB	Right Cheek	2680	21.71	22.0	1.069	0.064	0.068
	QPSK 20MHz 1RB	Right Tilted	2680	21.71	22.0	1.069	0.054	0.058
17.	QPSK 20MHz 1RB	Left Cheek	2680	21.71	22.0	1.069	0.086	0.092
	QPSK 20MHz 1RB	Left Tilted	2680	21.71	22.0	1.069	0.071	0.076
	QPSK 20MHz 50%RB	Right Cheek	2680	21.71	22.0	1.069	0.058	0.062
	QPSK 20MHz 50%RB	Right Tilted	2680	21.71	22.0	1.069	0.052	0.056
	QPSK 20MHz 50%RB	Left Cheek	2680	21.71	22.0	1.069	0.084	0.090
	QPSK 20MHz 50%RB	Left Tilted	2680	21.71	22.0	1.069	0.076	0.081

LTE Band66(P2)– Head SAR Test								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
18.	QPSK 20MHz 1RB	Right Cheek	1745	14.10	14.5	1.096	0.339	0.372
	QPSK 20MHz 1RB	Right Tilted	1745	14.10	14.5	1.096	0.315	0.345
	QPSK 20MHz 1RB	Left Cheek	1745	14.10	14.5	1.096	0.199	0.218
	QPSK 20MHz 1RB	Left Tilted	1745	14.10	14.5	1.096	0.178	0.195
	QPSK 20MHz 50%RB	Right Cheek	1745	14.10	14.5	1.096	0.321	0.352
	QPSK 20MHz 50%RB	Right Tilted	1745	14.10	14.5	1.096	0.306	0.336
	QPSK 20MHz 50%RB	Left Cheek	1745	14.10	14.5	1.096	0.189	0.207
	QPSK 20MHz 50%RB	Left Tilted	1745	14.10	14.5	1.096	0.164	0.180

LTE Band 71– Head SAR Test								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
19.	QPSK 20MHz 1RB	Right Cheek	673	22.05	22.5	1.109	0.412	0.457
	QPSK 20MHz 1RB	Right Tilted	673	22.05	22.5	1.109	0.387	0.429
	QPSK 20MHz 1RB	Left Cheek	673	22.05	22.5	1.109	0.261	0.289
	QPSK 20MHz 1RB	Left Tilted	673	22.05	22.5	1.109	0.242	0.268
	QPSK 20MHz 50%RB	Right Cheek	673	22.05	22.5	1.109	0.314	0.348
	QPSK 20MHz 50%RB	Right Tilted	673	22.05	22.5	1.109	0.283	0.314
	QPSK 20MHz 50%RB	Left Cheek	673	22.05	22.5	1.109	0.218	0.242
	QPSK 20MHz 50%RB	Left Tilted	673	22.05	22.5	1.109	0.186	0.206

NR n2(P2)– Head SAR Test								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth		MHz					
20.	DFT-s-OFDM QPSK 20MHz 1RB	Right Cheek	1880	14.49	14.5	1.002	0.027	0.027
	DFT-s-OFDM QPSK 20MHz 1RB	Right Tilted	1880	14.49	14.5	1.002	0.023	0.023
	DFT-s-OFDM QPSK 20MHz 1RB	Left Cheek	1880	14.49	14.5	1.002	0.012	0.012
	DFT-s-OFDM QPSK 20MHz 1RB	Left Tilted	1880	14.49	14.5	1.002	0.010	0.010

	DFT-s-OFDM QPSK 20MHz 50%RB	Right Cheek	1880	14.49	14.5	1.002	0.025	0.025
	DFT-s-OFDM QPSK 20MHz 50%RB	Right Tilted	1880	14.49	14.5	1.002	0.021	0.021
	DFT-s-OFDM QPSK 20MHz 50%RB	Left Cheek	1880	14.49	14.5	1.002	0.011	0.011
	DFT-s-OFDM QPSK 20MHz 50%RB	Left Tilted	1880	14.49	14.5	1.002	0.008	0.008

NR n5– Head SAR Test

Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth		MHz					
	DFT-s-OFDM QPSK 20MHz 1RB	Right Cheek	839	22.16	22.5	1.081	0.023	0.025
	DFT-s-OFDM QPSK 20MHz 1RB	Right Tilted	839	22.16	22.5	1.081	0.018	0.019
21.	DFT-s-OFDM QPSK 20MHz 1RB	Left Cheek	839	22.16	22.5	1.081	0.033	0.036
	DFT-s-OFDM QPSK 20MHz 1RB	Left Tilted	839	22.16	22.5	1.081	0.026	0.028
	DFT-s-OFDM QPSK 20MHz 50%RB	Right Cheek	839	22.16	22.5	1.081	0.021	0.023
	DFT-s-OFDM QPSK 20MHz 50%RB	Right Tilted	839	22.16	22.5	1.081	0.017	0.018
	DFT-s-OFDM QPSK 20MHz 50%RB	Left Cheek	839	22.16	22.5	1.081	0.031	0.034
	DFT-s-OFDM QPSK 20MHz 50%RB	Left Tilted	839	22.16	22.5	1.081	0.023	0.025

NR n25(P2)– Head SAR Test

Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth		MHz					
22.	DFT-s-OFDM QPSK 20MHz 1RB	Right Cheek	1882.5	14.48	14.5	1.005	0.026	0.026
	DFT-s-OFDM QPSK 20MHz 1RB	Right Tilted	1882.5	14.48	14.5	1.005	0.023	0.023
	DFT-s-OFDM QPSK 20MHz 1RB	Left Cheek	1882.5	14.48	14.5	1.005	0.016	0.016
	DFT-s-OFDM QPSK	Left Tilted	1882.5	14.48	14.5	1.005	0.015	0.015

	20MHz 1RB							
	DFT-s-OFDM QPSK 20MHz 50%RB	Right Cheek	1882.5	14.48	14.5	1.005	0.024	0.024
	DFT-s-OFDM QPSK 20MHz 50%RB	Right Tilted	1882.5	14.48	14.5	1.005	0.022	0.022
	DFT-s-OFDM QPSK 20MHz 50%RB	Left Cheek	1882.5	14.48	14.5	1.005	0.013	0.013
	DFT-s-OFDM QPSK 20MHz 50%RB	Left Tilted	1882.5	14.48	14.5	1.005	0.011	0.011

NR n41– Head SAR Test								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth		MHz					
	DFT-s-OFDM QPSK 100MHz 1RB	Right Cheek	2640	25.74	26.0	1.062	0.004	0.004
	DFT-s-OFDM QPSK 100MHz 1RB	Right Tilted	2640	25.74	26.0	1.062	0.003	0.003
23.	DFT-s-OFDM QPSK 100MHz 1RB	Left Cheek	2640	25.74	26.0	1.062	0.005	0.005
	DFT-s-OFDM QPSK 100MHz 1RB	Left Tilted	2640	25.74	26.0	1.062	0.004	0.004
	DFT-s-OFDM QPSK 100MHz 50%RB	Right Cheek	2640	25.74	26.0	1.062	0.004	0.004
	DFT-s-OFDM QPSK 100MHz 50%RB	Right Tilted	2640	25.74	26.0	1.062	0.003	0.003
	CP-OFDM-QPSK 100MHz 50%RB	Left Cheek	2640	25.74	26.0	1.062	0.004	0.004
	DFT-s-OFDM QPSK 100MHz 50%RB	Left Tilted	2640	25.74	26.0	1.062	0.003	0.003

NR n66(P2)– Head SAR Test								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth		MHz					
24.	DFT-s-OFDM QPSK 20MHz 1RB	Right Cheek	1720	15.01	15.5	1.119	0.018	0.020
	DFT-s-OFDM QPSK 20MHz 1RB	Right Tilted	1720	15.01	15.5	1.119	0.015	0.017

	DFT-s-OFDM QPSK 20MHz 1RB	Left Cheek	1720	15.01	15.5	1.119	0.013	0.015
	DFT-s-OFDM QPSK 20MHz 1RB	Left Tilted	1720	15.01	15.5	1.119	0.010	0.011
	DFT-s-OFDM QPSK 20MHz 50%RB	Right Cheek	1720	15.01	15.5	1.119	0.017	0.019
	DFT-s-OFDM QPSK 20MHz 50%RB	Right Tilted	1720	15.01	15.5	1.119	0.014	0.016
	DFT-s-OFDM QPSK 20MHz 50%RB	Left Cheek	1720	15.01	15.5	1.119	0.012	0.013
	DFT-s-OFDM QPSK 20MHz 50%RB	Left Tilted	1720	15.01	15.5	1.119	0.010	0.011

NR n71– Head SAR Test								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth		MHz					
25.	CP-OFDM-QPSK 20MHz 1RB	Right Cheek	673	22.23	22.5	1.064	0.006	0.006
	CP-OFDM-QPSK 20MHz 1RB	Right Tilted	673	22.23	22.5	1.064	0.005	0.005
	CP-OFDM-QPSK 20MHz 1RB	Left Cheek	673	22.23	22.5	1.064	0.005	0.005
	CP-OFDM-QPSK 20MHz 1RB	Left Tilted	673	22.23	22.5	1.064	0.004	0.004
	CP-OFDM-QPSK 20MHz 50%RB	Right Cheek	673	22.23	22.5	1.064	0.005	0.005
	CP-OFDM-QPSK 20MHz 50%RB	Right Tilted	673	22.23	22.5	1.064	0.004	0.004
	CP-OFDM-QPSK 20MHz 50%RB	Left Cheek	673	22.23	22.5	1.064	0.005	0.005
	CP-OFDM-QPSK 20MHz 50%RB	Left Tilted	673	22.23	22.5	1.064	0.004	0.004

NR n77_3450-3550MHz(P2)– Head SAR Test								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth		MHz					
	CP-OFDM-QPSK	Right Cheek	3500	15.23	15.5	1.064	0.025	0.027

	100MHz 1RB							
	CP-OFDM-QPSK 100MHz 1RB	Right Tilted	3500	15.23	15.5	1.064	0.023	0.024
26.	CP-OFDM-QPSK 100MHz 1RB	Left Cheek	3500	15.23	15.5	1.064	0.026	0.028
	CP-OFDM-QPSK 100MHz 1RB	Left Tilted	3500	15.23	15.5	1.064	0.024	0.026
	CP-OFDM-QPSK 100MHz 50%RB	Right Cheek	3500	15.23	15.5	1.064	0.023	0.024
	CP-OFDM-QPSK 100MHz 50%RB	Right Tilted	3500	15.23	15.5	1.064	0.022	0.023
	CP-OFDM-QPSK 100MHz 50%RB	Left Cheek	3500	15.23	15.5	1.064	0.024	0.026
	CP-OFDM-QPSK 100MHz 50%RB	Left Tilted	3500	15.23	15.5	1.064	0.023	0.024

NR n77_3700-3980MHz(P2)- Head SAR Test								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth		MHz					
	DFT-s-OFDM QPSK 100MHz 1RB	Right Cheek	3750	15.31	15.5	1.045	0.031	0.032
	DFT-s-OFDM QPSK 100MHz 1RB	Right Tilted	3750	15.31	15.5	1.045	0.029	0.030
27.	DFT-s-OFDM QPSK 100MHz 1RB	Left Cheek	3750	15.31	15.5	1.045	0.036	0.038
	DFT-s-OFDM QPSK 100MHz 1RB	Left Tilted	3750	15.31	15.5	1.045	0.034	0.036
	DFT-s-OFDM QPSK 100MHz 50%RB	Right Cheek	3750	15.31	15.5	1.045	0.030	0.031
	DFT-s-OFDM QPSK 100MHz 50%RB	Right Tilted	3750	15.31	15.5	1.045	0.027	0.028
	DFT-s-OFDM QPSK 100MHz 50%RB	Left Cheek	3750	15.31	15.5	1.045	0.035	0.037
	DFT-s-OFDM QPSK 100MHz 50%RB	Left Tilted	3750	15.31	15.5	1.045	0.033	0.034

WLAN 5.2GHz(P2)–Head SAR Test-ANT0									
Plot No.	Mode	Test Position	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
	802.11ax-VHT20	Right Cheek	48	5240	12.93	13.0	1.016	0.131	0.133
	802.11ax-VHT20	Right Tilted	48	5240	12.93	13.0	1.016	0.099	0.101
28.	802.11ax-VHT20	Left Cheek	48	5240	12.93	13.0	1.016	0.268	0.272
	802.11ax-VHT20	Left Tilted	48	5240	12.93	13.0	1.016	0.134	0.136

WLAN 5.3GHz(P2)–Head SAR Test-ANT0									
Plot No.	Mode	Test Position	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
	802.11a	Right Cheek	56	5280	12.95	13.0	1.012	0.158	0.160
	802.11a	Right Tilted	56	5280	12.95	13.0	1.012	0.124	0.125
29.	802.11a	Left Cheek	56	5280	12.95	13.0	1.012	0.235	0.238
	802.11a	Left Tilted	56	5280	12.95	13.0	1.012	0.198	0.200

WLAN 5.6GHz(P2)–Head SAR Test-ANT0									
Plot No.	Mode	Test Position	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
	802.11ax-VHT40	Right Cheek	134	5670	13.33	13.5	1.040	0.245	0.255
	802.11ax-VHT40	Right Tilted	134	5670	13.33	13.5	1.040	0.208	0.216
30.	802.11ax-VHT40	Left Cheek	134	5670	13.33	13.5	1.040	0.324	0.337
	802.11ax-VHT40	Left Tilted	134	5670	13.33	13.5	1.040	0.269	0.280

WLAN 5.8GHz(P2)–Head SAR Test-ANT0									
Plot No.	Mode	Test Position	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
	802.11ax-VHT40	Right Cheek	151	5755	12.97	13.0	1.007	0.263	0.265
	802.11ax-VHT40	Right Tilted	151	5755	12.97	13.0	1.007	0.216	0.217
31.	802.11ax-VHT40	Left Cheek	151	5755	12.97	13.0	1.007	0.318	0.320
	802.11ax-VHT40	Left Tilted	151	5755	12.97	13.0	1.007	0.246	0.248

WLAN 2.4GHz(P2)–Head SAR Test-ANT0									
Plot No.	Mode	Test Position	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
	802.11b	Right Cheek	06	2437	16.15	16.5	1.084	0.128	0.139
	802.11b	Right Tilted	06	2437	16.15	16.5	1.084	0.098	0.106
32.	802.11b	Left Cheek	06	2437	16.15	16.5	1.084	0.272	0.295
	802.11b	Left Tilted	06	2437	16.15	16.5	1.084	0.237	0.257
	802.11ax-HE20	Right Cheek	11	2462	17.80	18.0	1.047	0.121	0.127
	802.11ax-HE20	Right Tilted	11	2462	17.80	18.0	1.047	0.092	0.096
	802.11ax-HE20	Left Cheek	11	2462	17.80	18.0	1.047	0.257	0.269
	802.11ax-HE20	Left Tilted	11	2462	17.80	18.0	1.047	0.218	0.228

WLAN 5.2GHz(P2)–Head SAR Test-ANT1									
Plot No.	Mode	Test Position	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
	802.11ax-VHT40	Right Cheek	46	5230	13.50	14.0	1.122	0.268	0.301
	802.11ax-VHT40	Right Tilted	46	5230	13.50	14.0	1.122	0.213	0.239
33.	802.11ax-VHT40	Left Cheek	46	5230	13.50	14.0	1.122	0.345	0.387
	802.11ax-VHT40	Left Tilted	46	5230	13.50	14.0	1.122	0.325	0.365

WLAN 5.3GHz(P2)–Head SAR Test-ANT1									
Plot No.	Mode	Test Position	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
	802.11a	Right Cheek	56	5280	13.18	13.5	1.076	0.206	0.222
	802.11a	Right Tilted	56	5280	13.18	13.5	1.076	0.185	0.199
34.	802.11a	Left Cheek	56	5280	13.18	13.5	1.076	0.283	0.305
	802.11a	Left Tilted	56	5280	13.18	13.5	1.076	0.256	0.276

WLAN 5.6GHz(P2)–Head SAR Test-ANT01									
Plot No.	Mode	Test Position	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
	802.11ax-VHT20	Right Cheek	140	5700	14.44	14.5	1.014	0.180	0.183
	802.11ax-VHT20	Right Tilted	140	5700	14.44	14.5	1.014	0.158	0.160
35.	802.11ax-VHT20	Left Cheek	140	5700	14.44	14.5	1.014	0.402	0.408
	802.11ax-VHT20	Left Tilted	140	5700	14.44	14.5	1.014	0.359	0.364

WLAN 5.8GHz(P2)–Head SAR Test-ANT1									
Plot No.	Mode	Test Position	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
	802.11ax-VHT40	Right Cheek	159	5795	13.83	14.0	1.040	0.128	0.133
	802.11ax-VHT40	Right Tilted	159	5795	13.83	14.0	1.040	0.113	0.118
36.	802.11ax-VHT40	Left Cheek	159	5795	13.83	14.0	1.040	0.414	0.431
	802.11ax-VHT40	Left Tilted	159	5795	13.83	14.0	1.040	0.324	0.337

WLAN 2.4GHz(P2)–Head SAR Test-ANT1									
Plot No.	Mode	Test Position	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
	802.11b	Right Cheek	11	2462	19.04	19.5	1.112	0.027	0.030
	802.11b	Right Tilted	11	2462	19.04	19.5	1.112	0.014	0.016
37.	802.11b	Left Cheek	11	2462	19.04	19.5	1.112	0.129	0.143
	802.11b	Left Tilted	11	2462	19.04	19.5	1.112	0.095	0.106
	802.11ax-HE20	Right Cheek	11	2462	20.10	20.5	1.096	0.025	0.027
	802.11ax-HE20	Right Tilted	11	2462	20.10	20.5	1.096	0.013	0.014
	802.11ax-HE20	Left Cheek	11	2462	20.10	20.5	1.096	0.111	0.122
	802.11ax-HE20	Left Tilted	11	2462	20.10	20.5	1.096	0.086	0.094

Bluetooth–Head SAR Test									
Plot No.	Mode	Test Position	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
	Bluetooth	Right Cheek		2441	15.50	16.0	1.122	0.137	0.154
	Bluetooth	Right Tilted		2441	15.50	16.0	1.122	0.102	0.114
38.	Bluetooth	Left Cheek		2441	15.50	16.0	1.122	0.186	0.209
	Bluetooth	Left Tilted		2441	15.50	16.0	1.122	0.143	0.160

Remark: Per KDB 447498 D01 v06, if the highest output channel SAR for each exposure position ≤ 0.8 W/kg other channels SAR tests are not necessary.

Body-worn SAR

GSM850 – Body SAR Test (Gap: 10mm)									
Plot No.	Mode	Test Position	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
39.	GSM	Back	128	824.2	32.68	33.0	1.076	0.459	0.494
	GSM	Front	128	824.2	32.68	33.0	1.076	0.232	0.250

GSM1900 – Body SAR Test (Gap: 10mm)									
Plot No.	Mode	Test Position	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
	GSM	Back	661	1880	29.77	30.0	1.054	0.123	0.130
40.	GSM	Front	661	1880	29.77	30.0	1.054	0.152	0.160

WCDMA Band 2 – Body SAR Test (Gap: 10mm)									
Plot No.	Mode	Test Position	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
41.	RMC 12.2k	Back Side	9400	1880.0	22.12	22.5	1.091	0.363	0.396
	RMC 12.2k	Front Side	9400	1880.0	22.12	22.5	1.091	0.334	0.365

WCDMA Band 4 – Body SAR Test (Gap: 10mm)									
Plot No.	Mode	Test Position	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
42.	RMC 12.2k	Back Side	1312	1712.4	22.74	23.0	1.062	0.560	0.595
	RMC 12.2k	Front Side	1312	1712.4	22.74	23.0	1.062	0.447	0.475

WCDMA Band 5 – Body SAR Test (Gap: 10mm)									
Plot No.	Mode	Test Position	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
43.	RMC 12.2k	Back Side	4233	846.6	22.83	23.0	1.040	0.517	0.538
	RMC 12.2k	Front Side	4233	846.6	22.83	23.0	1.040	0.467	0.486

LTE Band 2–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
44.	QPSK 20MHz 1RB	Back Side	1880	22.73	23.0	1.064	0.466	0.496
	QPSK 20MHz 1RB	Front Side	1880	22.73	23.0	1.064	0.340	0.362
	QPSK 20MHz 50%RB	Back Side	1880	22.73	23.0	1.064	0.377	0.401
	QPSK 20MHz 50%RB	Front Side	1880	22.73	23.0	1.064	0.299	0.318

LTE Band 4–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
45.	QPSK 20MHz 1RB	Back Side	1720	22.86	23.0	1.033	0.511	0.528
	QPSK 20MHz 1RB	Front Side	1720	22.86	23.0	1.033	0.392	0.405
	QPSK 20MHz 50%RB	Back Side	1720	22.86	23.0	1.033	0.435	0.449
	QPSK 20MHz 50%RB	Front Side	1720	22.86	23.0	1.033	0.375	0.387

LTE Band 5–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
	QPSK 10MHz 1RB	Back Side	836.5	22.36	22.5	1.033	0.343	0.354
46.	QPSK 10MHz 1RB	Front Side	836.5	22.36	22.5	1.033	0.407	0.420
	QPSK 10MHz 50%RB	Back Side	836.5	22.36	22.5	1.033	0.290	0.300
	QPSK 10MHz 50%RB	Front Side	836.5	22.36	22.5	1.033	0.343	0.354

LTE Band 12–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
47.	QPSK 10MHz 1RB	Back Side	711	22.49	22.5	1.002	0.468	0.469
	QPSK 10MHz 1RB	Front Side	711	22.49	22.5	1.002	0.251	0.252
	QPSK 10MHz 50%RB	Back Side	711	22.49	22.5	1.002	0.319	0.320
	QPSK 10MHz 50%RB	Front Side	711	22.49	22.5	1.002	0.207	0.207

LTE Band 13–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
48.	QPSK 10MHz 1RB	Back Side	782	22.58	23.0	1.102	0.587	0.647
	QPSK 10MHz 1RB	Front Side	782	22.58	23.0	1.102	0.388	0.427
	QPSK 10MHz 50%RB	Back Side	782	22.58	23.0	1.102	0.571	0.629
	QPSK 10MHz 50%RB	Front Side	782	22.58	23.0	1.102	0.342	0.377

LTE Band 17–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
49.	QPSK 10MHz 1RB	Back Side	710	22.47	22.50	1.007	0.459	0.462
	QPSK 10MHz 1RB	Front Side	710	22.47	22.50	1.007	0.242	0.244
	QPSK 10MHz 50%RB	Back Side	710	22.47	22.50	1.007	0.373	0.376
	QPSK 10MHz 50%RB	Front Side	710	22.47	22.50	1.007	0.203	0.204

LTE Band 25–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
50.	QPSK 20MHz 1RB	Back Side	1882.5	21.89	22.0	1.026	0.399	0.409
	QPSK 20MHz 1RB	Front Side	1882.5	21.89	22.0	1.026	0.333	0.342
	QPSK 20MHz 50%RB	Back Side	1882.5	21.89	22.0	1.026	0.312	0.320
	QPSK 20MHz 50%RB	Front Side	1882.5	21.89	22.0	1.026	0.286	0.293

LTE Band 26(814-824MHz)–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
51.	QPSK 10MHz 1RB	Back Side	819	22.59	23.0	1.099	0.528	0.580
	QPSK 10MHz 1RB	Front Side	819	22.59	23.0	1.099	0.356	0.391
	QPSK 10MHz 50%RB	Back Side	819	22.59	23.0	1.099	0.456	0.501
	QPSK 10MHz 50%RB	Front Side	819	22.59	23.0	1.099	0.308	0.338

LTE Band 26(824-849MHz)–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
52.	QPSK 15MHz 1RB	Back Side	831	22.49	22.5	1.002	0.580	0.581
	QPSK 15MHz 1RB	Front Side	831	22.49	22.5	1.002	0.389	0.390
	QPSK 15MHz 50%RB	Back Side	831	22.49	22.5	1.002	0.571	0.572
	QPSK 15MHz 50%RB	Front Side	831	22.49	22.5	1.002	0.312	0.313

LTE Band 41–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
53.	QPSK 20MHz 1RB	Back Side	2680	21.71	22.0	1.069	0.403	0.431
	QPSK 20MHz 1RB	Front Side	2680	21.71	22.0	1.069	0.347	0.371
	QPSK 20MHz 50%RB	Back Side	2680	21.71	22.0	1.069	0.273	0.292
	QPSK 20MHz 50%RB	Front Side	2680	21.71	22.0	1.069	0.265	0.283

LTE Band 66–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
	QPSK 20MHz 1RB	Back Side	1745	22.31	22.50	1.045	0.456	0.476
54.	QPSK 20MHz 1RB	Front Side	1745	22.31	22.50	1.045	0.504	0.527
	QPSK 20MHz 50%RB	Back Side	1745	22.31	22.50	1.045	0.393	0.411
	QPSK 20MHz 50%RB	Front Side	1745	22.31	22.50	1.045	0.475	0.496

LTE Band 71–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
55.	QPSK 20MHz 1RB	Back Side	673	22.05	22.5	1.109	0.473	0.525
	QPSK 20MHz 1RB	Front Side	673	22.05	22.5	1.109	0.386	0.428
	QPSK 20MHz 50%RB	Back Side	673	22.05	22.5	1.109	0.391	0.434
	QPSK 20MHz 50%RB	Front Side	673	22.05	22.5	1.109	0.318	0.353

NR n2–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
56.	DFT-s-OFDM QPSK 20MHz 1RB	Back Side	1880	23.30	23.5	1.047	0.053	0.055
	DFT-s-OFDM QPSK 20MHz 1RB	Front Side	1880	23.30	23.5	1.047	0.042	0.044
	DFT-s-OFDM QPSK 20MHz 50%RB	Back Side	1880	23.30	23.5	1.047	0.044	0.046
	DFT-s-OFDM QPSK 20MHz 50%RB	Front Side	1880	23.30	23.5	1.047	0.034	0.036

NR n5–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
57.	DFT-s-OFDM QPSK 20MHz 1RB	Back Side	839	22.16	22.5	1.081	0.030	0.032
	DFT-s-OFDM QPSK 20MHz 1RB	Front Side	839	22.16	22.5	1.081	0.028	0.030
	DFT-s-OFDM QPSK 20MHz 50%RB	Back Side	839	22.16	22.5	1.081	0.028	0.030
	DFT-s-OFDM QPSK 20MHz 50%RB	Front Side	839	22.16	22.5	1.081	0.024	0.026

NR n25–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
58.	DFT-s-OFDM QPSK 20MHz 1RB	Back Side	1882.5	23.45	23.5	1.012	0.042	0.042
	DFT-s-OFDM QPSK 20MHz 1RB	Front Side	1882.5	23.45	23.5	1.012	0.034	0.034
	DFT-s-OFDM QPSK 20MHz 50%RB	Back Side	1882.5	23.45	23.5	1.012	0.040	0.040
	DFT-s-OFDM QPSK 20MHz 50%RB	Front Side	1882.5	23.45	23.5	1.012	0.031	0.031

NR n41–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
59.	DFT-s-OFDM QPSK 100MHz 1RB	Back Side	2640	25.74	26.0	1.062	0.036	0.038
	DFT-s-OFDM QPSK 100MHz 1RB	Front Side	2640	25.74	26.0	1.062	0.029	0.031
	DFT-s-OFDM QPSK 100MHz 50%RB	Back Side	2640	25.74	26.0	1.062	0.035	0.037
	DFT-s-OFDM QPSK 100MHz 50%RB	Front Side	2640	25.74	26.0	1.062	0.027	0.029

NR n66–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
60.	DFT-s-OFDM QPSK 200MHz 1RB	Back Side	1720	23.05	23.5	1.109	0.030	0.033
	DFT-s-OFDM QPSK 200MHz 1RB	Front Side	1720	23.05	23.5	1.109	0.025	0.028
	DFT-s-OFDM QPSK 200MHz 50%RB	Back Side	1720	23.05	23.5	1.109	0.029	0.032
	DFT-s-OFDM QPSK 200MHz 50%RB	Front Side	1720	23.05	23.5	1.109	0.024	0.027

NR n71–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
61.	DFT-s-OFDM QPSK 20MHz 1RB	Back Side	673	22.23	22.5	1.064	0.014	0.015
	DFT-s-OFDM QPSK 20MHz 1RB	Front Side	673	22.23	22.5	1.064	0.008	0.009
	DFT-s-OFDM QPSK 20MHz 50%RB	Back Side	673	22.23	22.5	1.064	0.012	0.013
	DFT-s-OFDM QPSK 20MHz 50%RB	Front Side	673	22.23	22.5	1.064	0.007	0.007

NR n77_3450-3550MHz–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
62.	DFT-s-OFDM QPSK 20MHz 1RB	Back Side	3500	25.65	26.0	1.084	0.046	0.050
	DFT-s-OFDM QPSK K 20MHz 1RB	Front Side	3500	25.65	26.0	1.084	0.035	0.038
	DFT-s-OFDM QPSK 20MHz 50%RB	Back Side	3500	25.65	26.0	1.084	0.042	0.046
	DFT-s-OFDM QPSK 20MHz 50%RB	Front Side	3500	25.65	26.0	1.084	0.033	0.036

NR n77_3700-3980MHz–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
63.	DFT-s-OFDM QPSK 100MHz 1RB	Back Side	3790	25.72	26.0	1.067	0.056	0.060
	DFT-s-OFDM QPSK 100MHz 1RB	Front Side	3790	25.72	26.0	1.067	0.044	0.047
	DFT-s-OFDM QPSK 100MHz 50%RB	Back Side	3790	25.72	26.0	1.067	0.051	0.054
	DFT-s-OFDM QPSK 100MHz 50%RB	Front Side	3790	25.72	26.0	1.067	0.042	0.045

WLAN 5.2GHz –Body SAR Test (Gap: 10mm)-ANT0									
Plot No.	Mode	Test Position	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
64.	802.11a	Back Side	48	5240	16.67	17.0	1.079	0.156	0.168
	802.11a	Front Side	48	5240	16.67	17.0	1.079	0.123	0.133

WLAN 5.3GHz –Body SAR Test (Gap: 10mm) -ANT0									
Plot No.	Mode	Test Position	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
65.	802.11a	Back Side	52	5260	16.46	16.5	1.009	0.145	0.146
	802.11a	Front Side	52	5260	16.46	16.5	1.009	0.113	0.114

WLAN 5.6GHz –Body SAR Test (Gap: 10mm) -ANT0									
Plot No.	Mode	Test Position	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
66.	802.11a	Back Side	140	5700	16.50	17.0	1.122	0.236	0.265
	802.11a	Front Side	140	5700	16.50	17.0	1.122	0.201	0.226

WLAN 5.8GHz –Body SAR Test (Gap: 10mm) -ANT0									
Plot No.	Mode	Test Position	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
67.	802.11a	Back Side	157	5785	16.64	17.0	1.086	0.124	0.135
	802.11a	Front Side	157	5785	16.64	17.0	1.086	0.092	0.100

WLAN 2.4GHz –Body SAR Test (Gap: 10mm) –ANT0									
Plot No.	Mode	Test Position	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
68.	802.11b	Back Side	06	2437	20.91	21.0	1.021	0.275	0.281
	802.11b	Front Side	06	2437	20.91	21.0	1.021	0.196	0.200

WLAN 5.2GHz –Body SAR Test (Gap: 10mm)-ANT1									
Plot No.	Mode	Test Position	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
69.	802.11a	Back Side	48	5240	15.78	16.0	1.052	0.125	0.131
	802.11a	Front Side	48	5240	15.78	16.0	1.052	0.092	0.097

WLAN 5.3GHz –Body SAR Test (Gap: 10mm) –ANT1									
Plot No.	Mode	Test Position	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
70.	802.11a	Back Side	56	5280	15.72	16.0	1.067	0.115	0.123
	802.11a	Front Side	56	5280	15.72	16.0	1.067	0.084	0.090

WLAN 5.6GHz –Body SAR Test (Gap: 10mm) –ANT1									
Plot No.	Mode	Test Position	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
71.	802.11a	Back Side	140	5700	15.89	16.0	1.026	0.208	0.213
	802.11a	Front Side	140	5700	15.89	16.0	1.026	0.163	0.167

WLAN 5.8GHz –Body SAR Test (Gap: 10mm) –ANT1									
Plot No.	Mode	Test Position	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
72.	802.11a	Back Side	165	5825	15.47	15.5	1.007	0.131	0.132
	802.11a	Front Side	165	5825	15.47	15.5	1.007	0.105	0.106

WLAN 2.4GHz –Body SAR Test (Gap: 10mm) -ANT1									
Plot No.	Mode	Test Position	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
73.	802.11b	Back Side	11	2462	22.01	22.5	1.119	0.099	0.111
	802.11b	Front Side	11	2462	22.01	22.5	1.119	0.055	0.062

Bluetooth –Body SAR Test(Gap: 10mm)									
Plot No.	Mode	Test Position	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			MHz						
74.	Bluetooth	Back Side	2441		15.50	16.0	1.122	0.120	0.135
	Bluetooth	Front Side	2441		15.50	16.0	1.122	0.074	0.083

Hotspot SAR

GSM850(P3) – Body SAR Test (Gap: 10mm)									
Plot No.	Mode	Test Position	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
75.	GPRS_2TX	Back Side	128	824.2	29.81	30.0	1.045	0.640	0.669
	GPRS_2TX	Front Side	128	824.2	29.81	30.0	1.045	0.432	0.451
	GPRS_2TX	Right side	128	824.2	29.81	30.0	1.045	0.386	0.403
	GPRS_2TX	Left side	128	824.2	29.81	30.0	1.045	0.215	0.225
	GPRS_2TX	Bottom side	128	824.2	29.81	30.0	1.045	0.412	0.430

GSM1900(P3) – Body SAR Test (Gap: 10mm)									
Plot No.	Mode	Test Position	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
76.	GPRS_4TX	Back Side	661	1880	18.96	19.0	1.009	0.134	0.135
	GPRS_4TX	Front Side	661	1880	18.96	19.0	1.009	0.112	0.113
	GPRS_4TX	Left side	661	1880	18.96	19.0	1.009	0.104	0.105
	GPRS_4TX	Top Side	661	1880	18.96	19.0	1.009	0.118	0.119

WCDMA Band 2(P3) – Body SAR Test (Gap: 10mm)									
Plot No.	Mode	Test Position	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
	RMC 12.2k	Back Side	9400	1880.0	18.12	18.5	1.091	0.243	0.265
77.	RMC 12.2k	Front Side	9400	1880.0	18.12	18.5	1.091	0.325	0.355
	RMC 12.2k	Left side	9400	1880.0	18.12	18.5	1.091	0.187	0.204
	RMC 12.2k	Top Side	9400	1880.0	18.12	18.5	1.091	0.154	0.168

WCDMA Band 4(P3) – Body SAR Test (Gap: 10mm)									
Plot No.	Mode	Test Position	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
78.	RMC 12.2k	Back Side	1312	1712.4	18.69	19.0	1.074	0.203	0.218
	RMC 12.2k	Front Side	1312	1712.4	18.69	19.0	1.074	0.185	0.199
	RMC 12.2k	Left side	1312	1712.4	18.69	19.0	1.074	0.164	0.176
	RMC 12.2k	Top Side	1312	1712.4	18.69	19.0	1.074	0.173	0.186

WCDMA Band 5(P3) – Body SAR Test (Gap: 10mm)									
Plot No.	Mode	Test Position	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
79.	RMC 12.2k	Back Side	4132	826.4	20.79	21.0	1.050	0.273	0.287
	RMC 12.2k	Front Side	4132	826.4	20.79	21.0	1.050	0.214	0.225
	RMC 12.2k	Right side	4132	826.4	20.79	21.0	1.050	0.193	0.203
	RMC 12.2k	Left side	4132	826.4	20.79	21.0	1.050	0.164	0.172
	RMC 12.2k	Bottom side	4132	826.4	20.79	21.0	1.050	0.187	0.196

LTE Band 2(P3)–Body SAR Test (Gap: 10mm)									
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)	
	Modulation, Bandwidth, RB		MHz						
80.	QPSK 20MHz 1RB	Back Side	1880	17.63	18.0	1.089	0.405	0.441	
	QPSK 20MHz 1RB	Front Side	1880	17.63	18.0	1.089	0.286	0.311	
	QPSK 20MHz 1RB	Left side	1880	17.63	18.0	1.089	0.256	0.279	
	QPSK 20MHz 1RB	Top Side	1880	17.63	18.0	1.089	0.338	0.368	
	QPSK 20MHz 50%RB	Back Side	1880	17.63	18.0	1.089	0.351	0.382	
	QPSK 20MHz 50%RB	Front Side	1880	17.63	18.0	1.089	0.261	0.284	
	QPSK 20MHz 50%RB	Left side	1880	17.63	18.0	1.089	0.215	0.234	
	QPSK 20MHz 50%RB	Top Side	1880	17.63	18.0	1.089	0.308	0.335	

LTE Band 4(P3)–Body SAR Test (Gap: 10mm)									
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)	
	Modulation, Bandwidth, RB		MHz						
81.	QPSK 20MHz 1RB	Back Side	1745	19.19	19.5	1.074	0.392	0.421	
	QPSK 20MHz 1RB	Front Side	1745	19.19	19.5	1.074	0.349	0.375	
	QPSK 20MHz 1RB	Left side	1745	19.19	19.5	1.074	0.265	0.285	
	QPSK 20MHz 1RB	Top Side	1745	19.19	19.5	1.074	0.283	0.304	
	QPSK 20MHz 50%RB	Back Side	1745	19.19	19.5	1.074	0.389	0.418	
	QPSK 20MHz 50%RB	Front Side	1745	19.19	19.5	1.074	0.331	0.355	
	QPSK 20MHz 50%RB	Left side	1745	19.19	19.5	1.074	0.241	0.259	
	QPSK 20MHz 50%RB	Top Side	1745	19.19	19.5	1.074	0.258	0.277	

LTE Band 5–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
	QPSK 10MHz 1RB	Back Side	836.5	22.36	22.5	1.033	0.343	0.354
	QPSK 10MHz 1RB	Front Side	836.5	22.36	22.5	1.033	0.407	0.420
	QPSK 10MHz 1RB	Right side	836.5	22.36	22.5	1.033	0.490	0.506
	QPSK 10MHz 1RB	Left side	836.5	22.36	22.5	1.033	0.151	0.156
82.	QPSK 10MHz 1RB	Bottom side	836.5	22.36	22.5	1.033	0.592	0.611
	QPSK 10MHz 50%RB	Back Side	836.5	22.36	22.5	1.033	0.290	0.300
	QPSK 10MHz 50%RB	Front Side	836.5	22.36	22.5	1.033	0.343	0.354
	QPSK 10MHz 50%RB	Right side	836.5	22.36	22.5	1.033	0.467	0.482
	QPSK 10MHz 50%RB	Left side	836.5	22.36	22.5	1.033	0.122	0.126
	QPSK 10MHz 50%RB	Bottom side	836.5	22.36	22.5	1.033	0.573	0.592

LTE Band 12–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
83.	QPSK 10MHz 1RB	Back Side	711	22.49	22.5	1.002	0.468	0.469
	QPSK 10MHz 1RB	Front Side	711	22.49	22.5	1.002	0.251	0.252
	QPSK 10MHz 1RB	Right side	711	22.49	22.5	1.002	0.338	0.339
	QPSK 10MHz 1RB	Left side	711	22.49	22.5	1.002	0.083	0.083
	QPSK 10MHz 1RB	Bottom side	711	22.49	22.5	1.002	0.340	0.341
	QPSK 10MHz 50%RB	Back Side	711	22.49	22.5	1.002	0.319	0.320
	QPSK 10MHz 50%RB	Front Side	711	22.49	22.5	1.002	0.207	0.207
	QPSK 10MHz 50%RB	Right side	711	22.49	22.5	1.002	0.302	0.303
	QPSK 10MHz 50%RB	Left side	711	22.49	22.5	1.002	0.078	0.078
	QPSK 10MHz 50%RB	Bottom side	711	22.49	22.5	1.002	0.313	0.314

LTE Band 13–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
84.	QPSK 10MHz 1RB	Back Side	782	22.58	23.0	1.102	0.587	0.647
	QPSK 10MHz 1RB	Front Side	782	22.58	23.0	1.102	0.388	0.427
	QPSK 10MHz 1RB	Right side	782	22.58	23.0	1.102	0.486	0.535
	QPSK 10MHz 1RB	Left side	782	22.58	23.0	1.102	0.103	0.113
	QPSK 10MHz 1RB	Bottom side	782	22.58	23.0	1.102	0.583	0.642
	QPSK 10MHz 50%RB	Back Side	782	22.58	23.0	1.102	0.571	0.629
	QPSK 10MHz 50%RB	Front Side	782	22.58	23.0	1.102	0.342	0.377
	QPSK 10MHz 50%RB	Right side	782	22.58	23.0	1.102	0.457	0.503
	QPSK 10MHz 50%RB	Left side	782	22.58	23.0	1.102	0.095	0.105
	QPSK 10MHz 50%RB	Bottom side	782	22.58	23.0	1.102	0.562	0.619

LTE Band 17–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
85.	QPSK 10MHz 1RB	Back Side	710	22.47	22.50	1.007	0.459	0.462
	QPSK 10MHz 1RB	Front Side	710	22.47	22.50	1.007	0.242	0.244
	QPSK 10MHz 1RB	Right side	710	22.47	22.50	1.007	0.301	0.303
	QPSK 10MHz 1RB	Left side	710	22.47	22.50	1.007	0.081	0.082
	QPSK 10MHz 1RB	Bottom side	710	22.47	22.50	1.007	0.324	0.326
	QPSK 10MHz 50%RB	Back Side	710	22.47	22.50	1.007	0.373	0.376
	QPSK 10MHz 50%RB	Front Side	710	22.47	22.50	1.007	0.203	0.204
	QPSK 10MHz 50%RB	Right side	710	22.47	22.50	1.007	0.265	0.267
	QPSK 10MHz 50%RB	Left side	710	22.47	22.50	1.007	0.073	0.074
	QPSK 10MHz 50%RB	Bottom side	710	22.47	22.50	1.007	0.296	0.298

LTE Band 25(P3)–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
86.	QPSK 20MHz 1RB	Back Side	1882.5	17.72	18.0	1.067	0.369	0.394
	QPSK 20MHz 1RB	Front Side	1882.5	17.72	18.0	1.067	0.263	0.281
	QPSK 20MHz 1RB	Left side	1882.5	17.72	18.0	1.067	0.214	0.228
	QPSK 20MHz 1RB	Top Side	1882.5	17.72	18.0	1.067	0.346	0.369
	QPSK 20MHz 50%RB	Back Side	1882.5	17.72	18.0	1.067	0.292	0.311
	QPSK 20MHz 50%RB	Front Side	1882.5	17.72	18.0	1.067	0.241	0.257
	QPSK 20MHz 50%RB	Left side	1882.5	17.72	18.0	1.067	0.195	0.208
	QPSK 20MHz 50%RB	Top Side	1882.5	17.72	18.0	1.067	0.314	0.335

LTE Band 26(814-824MHz)–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
87.	QPSK 10MHz 1RB	Back Side	819	22.59	23.0	1.099	0.528	0.580
	QPSK 10MHz 1RB	Front Side	819	22.59	23.0	1.099	0.356	0.391
	QPSK 10MHz 1RB	Right side	819	22.59	23.0	1.099	0.317	0.348
	QPSK 10MHz 1RB	Left side	819	22.59	23.0	1.099	0.107	0.118
	QPSK 10MHz 1RB	Bottom side	819	22.59	23.0	1.099	0.471	0.518
	QPSK 10MHz 50%RB	Back Side	819	22.59	23.0	1.099	0.456	0.501
	QPSK 10MHz 50%RB	Front Side	819	22.59	23.0	1.099	0.308	0.338
	QPSK 10MHz 50%RB	Right side	819	22.59	23.0	1.099	0.291	0.320
	QPSK 10MHz 50%RB	Left side	819	22.59	23.0	1.099	0.098	0.108
	QPSK 10MHz 50%RB	Bottom side	819	22.59	23.0	1.099	0.443	0.487

LTE Band 26(824-849MHz)–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
	QPSK 15MHz 1RB	Back Side	831	22.49	22.5	1.002	0.580	0.581
	QPSK 15MHz 1RB	Front Side	831	22.49	22.5	1.002	0.389	0.390
	QPSK 15MHz 1RB	Right side	831	22.49	22.5	1.002	0.402	0.403
	QPSK 15MHz 1RB	Left side	831	22.49	22.5	1.002	0.107	0.107
88.	QPSK 15MHz 1RB	Bottom side	831	22.49	22.5	1.002	0.595	0.596
	QPSK 15MHz 50%RB	Back Side	831	22.49	22.5	1.002	0.571	0.572
	QPSK 15MHz 50%RB	Front Side	831	22.49	22.5	1.002	0.312	0.313
	QPSK 15MHz 50%RB	Right side	831	22.49	22.5	1.002	0.376	0.377
	QPSK 15MHz 50%RB	Left side	831	22.49	22.5	1.002	0.095	0.095
	QPSK 15MHz 50%RB	Bottom side	831	22.49	22.5	1.002	0.578	0.579

LTE Band 41(P3)–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
89.	QPSK 20MHz 1RB	Back Side	2680	18.99	19.0	1.002	0.284	0.285
	QPSK 20MHz 1RB	Front Side	2680	18.99	19.0	1.002	0.244	0.245
	QPSK 20MHz 1RB	Right side	2680	18.99	19.0	1.002	0.059	0.059
	QPSK 20MHz 1RB	Left side	2680	18.99	19.0	1.002	0.026	0.026
	QPSK 20MHz 1RB	Bottom side	2680	18.99	19.0	1.002	0.196	0.196
	QPSK 20MHz 50%RB	Back Side	2680	18.99	19.0	1.002	0.225	0.226
	QPSK 20MHz 50%RB	Front Side	2680	18.99	19.0	1.002	0.233	0.234
	QPSK 20MHz 50%RB	Right side	2680	18.99	19.0	1.002	0.046	0.046
	QPSK 20MHz 50%RB	Left side	2680	18.99	19.0	1.002	0.022	0.022
	QPSK 20MHz 50%RB	Bottom side	2680	18.99	19.0	1.002	0.179	0.179

LTE Band 66(P3)–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
90.	QPSK 20MHz 1RB	Back Side	1745	19.28	19.5	1.052	0.437	0.460
	QPSK 20MHz 1RB	Front Side	1745	19.28	19.5	1.052	0.355	0.373
	QPSK 20MHz 1RB	Left side	1745	19.28	19.5	1.052	0.316	0.332
	QPSK 20MHz 1RB	Top Side	1745	19.28	19.5	1.052	0.304	0.320
	QPSK 20MHz 50%RB	Back Side	1745	19.28	19.5	1.052	0.319	0.336
	QPSK 20MHz 50%RB	Front Side	1745	19.28	19.5	1.052	0.354	0.372
	QPSK 20MHz 50%RB	Left side	1745	19.28	19.5	1.052	0.302	0.318
	QPSK 20MHz 50%RB	Top Side	1745	19.28	19.5	1.052	0.286	0.301

LTE Band 71–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
91.	QPSK 20MHz 1RB	Back Side	673	22.05	22.5	1.109	0.473	0.525
	QPSK 20MHz 1RB	Front Side	673	22.05	22.5	1.109	0.386	0.428
	QPSK 20MHz 1RB	Right side	673	22.05	22.5	1.109	0.336	0.373
	QPSK 20MHz 1RB	Left side	673	22.05	22.5	1.109	0.090	0.100
	QPSK 20MHz 1RB	Bottom side	673	22.05	22.5	1.109	0.271	0.301
	QPSK 20MHz 50%RB	Back Side	673	22.05	22.5	1.109	0.391	0.434
	QPSK 20MHz 50%RB	Front Side	673	22.05	22.5	1.109	0.338	0.375
	QPSK 20MHz 50%RB	Right side	673	22.05	22.5	1.109	0.278	0.308
	QPSK 20MHz 50%RB	Left side	673	22.05	22.5	1.109	0.082	0.091
	QPSK 20MHz 50%RB	Bottom side	673	22.05	22.5	1.109	0.246	0.273

NR n2(P3)–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
92.	DFT-s-OFDM QPSK 20MHz 1RB	Back Side	1880	20.55	21.0	1.109	0.030	0.033
	DFT-s-OFDM QPSK 20MHz 1RB	Front Side	1880	20.55	21.0	1.109	0.023	0.026
	DFT-s-OFDM QPSK 20MHz 1RB	Left Side	1880	20.55	21.0	1.109	0.021	0.023
	DFT-s-OFDM QPSK 20MHz 1RB	Top Side	1880	20.55	21.0	1.109	0.019	0.021
	DFT-s-OFDM QPSK 20MHz 50%RB	Back Side	1880	20.55	21.0	1.109	0.027	0.030
	DFT-s-OFDM QPSK 20MHz 50%RB	Front Side	1880	20.55	21.0	1.109	0.021	0.023
	DFT-s-OFDM QPSK 20MHz 50%RB	Left Side	1880	20.55	21.0	1.109	0.018	0.020
	DFT-s-OFDM QPSK 20MHz 50%RB	Top Side	1880	20.55	21.0	1.109	0.015	0.017

NR n5–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
93.	DFT-s-OFDM QPSK 20MHz 1RB	Back Side	839	22.16	22.5	1.081	0.030	0.032
	DFT-s-OFDM QPSK 20MHz 1RB	Front Side	839	22.16	22.5	1.081	0.028	0.030
	DFT-s-OFDM QPSK 20MHz 1RB	Right side	839	22.16	22.5	1.081	0.023	0.025
	DFT-s-OFDM QPSK 20MHz 1RB	Left side	839	22.16	22.5	1.081	0.019	0.021
	DFT-s-OFDM QPSK 20MHz 50%RB	Bottom side	839	22.16	22.5	1.081	0.017	0.018
	DFT-s-OFDM QPSK 20MHz 50%RB	Back Side	839	22.16	22.5	1.081	0.028	0.030
	DFT-s-OFDM QPSK 20MHz 50%RB	Front Side	839	22.16	22.5	1.081	0.024	0.026

	DFT-s-OFDM QPSK 20MHz 50%RB	Right side	839	22.16	22.5	1.081	0.021	0.023
	DFT-s-OFDM QPSK 20MHz 50%RB	Left side	839	22.16	22.5	1.081	0.016	0.017
	DFT-s-OFDM QPSK 20MHz 50%RB	Bottom side	839	22.16	22.5	1.081	0.015	0.016

NR n25(P3)–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
94.	DFT-s-OFDM QPSK 20MHz 1RB	Back Side	1882.5	20.76	21.0	1.057	0.037	0.039
	DFT-s-OFDM QPSK 20MHz 1RB	Front Side	1882.5	20.76	21.0	1.057	0.031	0.033
	DFT-s-OFDM QPSK 20MHz 1RB	Left Side	1882.5	20.76	21.0	1.057	0.028	0.030
	DFT-s-OFDM QPSK 20MHz 1RB	Top Side	1882.5	20.76	21.0	1.057	0.027	0.029
	DFT-s-OFDM QPSK 20MHz 50%RB	Back Side	1882.5	20.76	21.0	1.057	0.035	0.037
	DFT-s-OFDM QPSK 20MHz 50%RB	Front Side	1882.5	20.76	21.0	1.057	0.027	0.029
	DFT-s-OFDM QPSK 20MHz 50%RB	Left Side	1882.5	20.76	21.0	1.057	0.023	0.024
	DFT-s-OFDM QPSK 20MHz 50%RB	Top Side	1882.5	20.76	21.0	1.057	0.021	0.022

NR n41(P3)–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
95.	DFT-s-OFDM QPSK 100MHz 1RB	Back Side	2640	19.82	20.0	1.042	0.029	0.030
	DFT-s-OFDM QPSK 100MHz 1RB	Front Side	2640	19.82	20.0	1.042	0.025	0.026
	DFT-s-OFDM QPSK 100MHz 1RB	Right Side	2640	19.82	20.0	1.042	0.011	0.011
	DFT-s-OFDM QPSK	Left Side	2640	19.82	20.0	1.042	0.013	0.014

	100MHz 1RB							
	DFT-s-OFDM QPSK 100MHz 1RB	Bottom Side	2640	19.82	20.0	1.042	0.016	0.017
	DFT-s-OFDM QPSK 100MHz 50%RB	Back Side	2640	19.82	20.0	1.042	0.027	0.028
	DFT-s-OFDM QPSK 100MHz 50%RB	Front Side	2640	19.82	20.0	1.042	0.021	0.022
	DFT-s-OFDM QPSK 100MHz 50%RB	Right Side	2640	19.82	20.0	1.042	0.010	0.010
	DFT-s-OFDM QPSK 100MHz 50%RB	Left Side	2640	19.82	20.0	1.042	0.011	0.011
	DFT-s-OFDM QPSK 100MHz 50%RB	Bottom Side	2640	19.82	20.0	1.042	0.014	0.015

NR n66(P3)–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1 g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
96.	DFT-s-OFDM QPSK 20MHz 1RB	Back Side	1720	20.12	20.5	1.091	0.025	0.027
	DFT-s-OFDM QPSK 20MHz 1RB	Front Side	1720	20.12	20.5	1.091	0.021	0.023
	DFT-s-OFDM QPSK 20MHz 1RB	Left Side	1720	20.12	20.5	1.091	0.018	0.020
	DFT-s-OFDM QPSK 20MHz 1RB	Top Side	1720	20.12	20.5	1.091	0.016	0.017
	DFT-s-OFDM QPSK 20MHz 50%RB	Back Side	1720	20.12	20.5	1.091	0.024	0.026
	DFT-s-OFDM QPSK 20MHz 50%RB	Front Side	1720	20.12	20.5	1.091	0.019	0.021
	DFT-s-OFDM QPSK 20MHz 50%RB	Left Side	1720	20.12	20.5	1.091	0.015	0.016
	DFT-s-OFDM QPSK 20MHz 50%RB	Top Side	1720	20.12	20.5	1.091	0.014	0.015

NR n71–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
97.	DFT-s-OFDM QPSK 20MHz 1RB	Back Side	673	22.23	22.5	1.064	0.014	0.015
	DFT-s-OFDM QPSK 20MHz 1RB	Front Side	673	22.23	22.5	1.064	0.008	0.009
	DFT-s-OFDM QPSK 20MHz 1RB	Right side	673	22.23	22.5	1.064	0.009	0.010
	DFT-s-OFDM QPSK K 20MHz 1RB	Left side	673	22.23	22.5	1.064	0.011	0.012
	DFT-s-OFDM QPSK 20MHz 1RB	Bottom side	673	22.23	22.5	1.064	0.010	0.011
	DFT-s-OFDM QPSK 20MHz 50%RB	Back Side	673	22.23	22.5	1.064	0.012	0.013
	DFT-s-OFDM QPSK K 20MHz 50%RB	Front Side	673	22.23	22.5	1.064	0.007	0.007
	DFT-s-OFDM QPSK 20MHz 50%RB	Right side	673	22.23	22.5	1.064	0.009	0.010
	DFT-s-OFDM QPSK 20MHz 50%RB	Left side	673	22.23	22.5	1.064	0.010	0.011
	DFT-s-OFDM QPSK 20MHz 50%RB	Bottom side	673	22.23	22.5	1.064	0.009	0.010

NR n77_3450-3550MHz(P3)–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
98.	DFT-s-OFDM QPSK 100MHz 1RB	Back Side	3500	15.87	16.0	1.030	0.031	0.032
	DFT-s-OFDM QPSK 100MHz 1RB	Front Side	3500	15.87	16.0	1.030	0.026	0.027
	DFT-s-OFDM QPSK 100MHz 1RB	Right side	3500	15.87	16.0	1.030	0.017	0.018
	DFT-s-OFDM QPSK 100MHz 1RB	Left side	3500	15.87	16.0	1.030	0.019	0.020
	DFT-s-OFDM QPSK 100MHz 1RB	Top Side	3500	15.87	16.0	1.030	0.024	0.025

	DFT-s-OFDM QPSK 100MHz 50%RB	Back Side	3500	15.87	16.0	1.030	0.030	0.031
	DFT-s-OFDM QPSK 100MHz 50%RB	Front Side	3500	15.87	16.0	1.030	0.024	0.025
	DFT-s-OFDM QPSK 100MHz 50%RB	Right side	3500	15.87	16.0	1.030	0.015	0.015
	DFT-s-OFDM QPSK 100MHz 50%RB	Left side	3500	15.87	16.0	1.030	0.017	0.018
	DFT-s-OFDM QPSK 100MHz 50%RB	Top Side	3500	15.87	16.0	1.030	0.023	0.024

NR n77_3700-3980MHz(P3)-Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
99.	DFT-s-OFDM QPSK 100MHz 1RB	Back Side	3750	15.12	15.5	1.091	0.036	0.039
	DFT-s-OFDM QPSK 100MHz 1RB	Front Side	3750	15.12	15.5	1.091	0.024	0.026
	DFT-s-OFDM QPSK 100MHz 1RB	Right side	3750	15.12	15.5	1.091	0.013	0.014
	DFT-s-OFDM QPSK 100MHz 1RB	Left side	3750	15.12	15.5	1.091	0.016	0.017
	DFT-s-OFDM QPSK 100MHz 1RB	Top Side	3750	15.12	15.5	1.091	0.021	0.023
	DFT-s-OFDM QPSK 100MHz 50%RB	Back Side	3750	15.12	15.5	1.091	0.032	0.035
	DFT-s-OFDM QPSK 100MHz 50%RB	Right side	3750	15.12	15.5	1.091	0.012	0.013
	DFT-s-OFDM QPSK 100MHz 50%RB	Left side	3750	15.12	15.5	1.091	0.014	0.015
	DFT-s-OFDM QPSK 100MHz 50%RB	Front Side	3750	15.12	15.5	1.091	0.027	0.029
	DFT-s-OFDM QPSK 100MHz 50%RB	Top Side	3750	15.12	15.5	1.091	0.023	0.025

WLAN 5.2GHz(P3) –Body SAR Test(10mm) –ANT0									
Plot No.	Mode	Test Position	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
100.	802.11a	Back Side	48	5240	13.49	13.5	1.002	0.058	0.058
	802.11a	Front Side	48	5240	13.49	13.5	1.002	0.029	0.029
	802.11a	Right side	48	5240	13.49	13.5	1.002	0.024	0.024
	802.11a	Top side	48	5240	13.49	13.5	1.002	0.027	0.027

WLAN 5.8GHz (P3)–Body SAR Test(10mm) –ANT0									
Plot No.	Mode	Test Position	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
101.	802.11ax-V HT40	Back Side	151	5755	13.48	13.5	1.005	0.071	0.071
	802.11ax-V HT40	Front Side	151	5755	13.48	13.5	1.005	0.057	0.057
	802.11ax-V HT40	Right side	151	5755	13.48	13.5	1.005	0.039	0.039
	802.11ax-V HT40	Top side	151	5755	13.48	13.5	1.005	0.045	0.045

WLAN 2.4GHz(P3) –Body SAR Test(10mm)-ANT0									
Plot No.	Mode	Test Position	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
102.	802.11b	Back Side	06	2437	17.96	18.0	1.009	0.123	0.124
	802.11b	Front Side	06	2437	17.96	18.0	1.009	0.100	0.101
	802.11b	Right side	06	2437	17.96	18.0	1.009	0.053	0.053
	802.11b	Top side	06	2437	17.96	18.0	1.009	0.080	0.081
	802.11ax-H E20	Back Side	11	2462	19.51	20.0	1.119	0.107	0.120
	802.11ax-H E20	Front Side	11	2462	19.51	20.0	1.119	0.086	0.096
	802.11ax-H E20	Right side	11	2462	19.51	20.0	1.119	0.048	0.054
	802.11ax-H E20	Top side	11	2462	19.51	20.0	1.119	0.075	0.084

WLAN 5.2GHz(P3) –Body SAR Test(10mm) -ANT1									
Plot No.	Mode	Test Position	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
103.	802.11a	Back Side	48	5240	12.90	13.0	1.023	0.068	0.070
	802.11a	Front Side	48	5240	12.90	13.0	1.023	0.056	0.057
	802.11a	Right side	48	5240	12.90	13.0	1.023	0.051	0.052

WLAN 5.8GHz(P3) –Body SAR Test(10mm) -ANT1									
Plot No.	Mode	Test Position	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
104.	802.11ax-V HT20	Back Side	165	5825	13.78	14.0	1.052	0.079	0.083
	802.11ax-V HT20	Front Side	165	5825	13.78	14.0	1.052	0.053	0.056
	802.11ax-V HT20	Right side	165	5825	13.78	14.0	1.052	0.046	0.048

WLAN 2.4GHz(P3) –Body SAR Test(10mm)-ANT1									
Plot No.	Mode	Test Position	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
105.	802.11b	Back Side	11	2462	18.77	19.0	1.054	0.073	0.077
	802.11b	Front Side	11	2462	18.77	19.0	1.054	0.041	0.043
	802.11b	Right side	11	2462	18.77	19.0	1.054	0.038	0.040
	802.11ax-H E20	Back Side	11	2462	19.72	20.0	1.067	0.064	0.068
	802.11ax-H E20	Front Side	11	2462	19.72	20.0	1.067	0.038	0.041
	802.11ax-H E20	Right side	11	2462	19.72	20.0	1.067	0.035	0.037

Bluetooth –Body SAR Test(10mm)									
Plot No.	Mode	Test Position	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			MHz						
106.	Bluetooth	Back Side	2441		15.50	16.0	1.122	0.120	0.135
	Bluetooth	Front Side	2441		15.50	16.0	1.122	0.074	0.083
	Bluetooth	Right side	2441		15.50	16.0	1.122	0.035	0.039
	Bluetooth	Top side	2441		15.50	16.0	1.122	0.039	0.044

- Remark:1.** Per KDB 447498 D01 v06, if the highest output channel SAR for each exposure position ≤ 0.8 W/kg other channels SAR tests are not necessary.
2. Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 3) through 5) do not apply.
 3. When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
 4. Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
 5. Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

9.3 Simultaneous Multi-band Transmission SAR Analysis

List of Mode for Simultaneous Multi-band Transmission

No.	Configurations	Head SAR	Body SAR
1	GSM(Voice/Data) + WLAN(2.4GHz/5GHz)(Data)0+ WLAN(2.4GHz/5GHz)(Data)1+ NFC)(Data)	Yes	Yes
2	WCDMA (Voice/Data+ WLAN(2.4GHz/5GHz)(Data)0+ WLAN(2.4GHz/5GHz)(Data)1+ NFC)(Data)	Yes	Yes
3	LTE(Data) + WLAN(2.4GHz/5GHz)(Data)0+ WLAN(2.4GHz/5GHz)(Data)1+ NFC)(Data)	Yes	Yes
4	NR(Data) + WLAN(2.4GHz/5GHz)(Data)0+ WLAN(2.4GHz/5GHz)(Data)1+ NFC)(Data)	Yes	Yes
5	GSM(Voice/Data) + Bluetooth(Data))+ WLAN(2.4GHz/5GHz)(Data)1+ NFC)(Data)	Yes	Yes
6	WCDMA (Voice/Data) + Bluetooth(Data))+ WLAN(2.4GHz/5GHz)(Data)1+ NFC)(Data)	Yes	Yes
7	LTE(Data) + Bluetooth(Data))+ WLAN(2.4GHz/5GHz)(Data)1+ NFC)(Data)	Yes	Yes
8	NR(Data) + Bluetooth(Data))+ WLAN(2.4GHz/5GHz)(Data)1+ NFC)(Data)	Yes	Yes

Remark:

1. GSM ,WCDMA , LTE, and NR share the same antenna, and cannot transmit simultaneously.
2. WLAN 0 and Bluetooth share the same antenna, and cannot transmit simultaneously.
3. According to the KDB 447498 D01 v06, when standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)]·[√f(GHz)/x]
W/kg for test separation distances ≤ 50 mm;

where x = 7.5 for 1-g SAR, and x = 18.75 for 10-g SAR.

For simultaneous transmission analysis, NFC SAR is estimated per KDB 447498 D01 v06 as below:

NFC:

Tune-Up Power (dBm)	Max. Power (nW)	Distance (mm)	Frequency (GHz)	X	SAR(1g) 5mm	SAR(1g) 10mm
-47	19.95	5/10	0.01356	7.5	0.00046	0.00023

4. The maximum SAR summation is calculated based on the same configuration and test position.

Head SAR**WWAN and WLAN**

Position	WWAN		WLAN(2.4GHz/5GHz) -ANT0	WLAN(2.4GHz/5GHz) -ANT1	NFC	Summed SAR (W/kg)
	Band	Scaled SAR (W/kg)	Scaled SAR (W/kg)	Scaled SAR (W/kg)	Scaled SAR (W/kg)	
Right Cheek	GSM	0.685	0.301	0.265	0.00046	1.251
Right Tilted	GSM	0.636	0.239	0.217	0.00046	1.092
Left Cheek	GSM	0.386	0.431	0.337	0.00046	1.154
Left Tilted	GSM	0.361	0.365	0.280	0.00046	1.006
Right Cheek	WCDMA	0.385	0.301	0.265	0.00046	0.951
Right Tilted	WCDMA	0.334	0.239	0.217	0.00046	0.790
Left Cheek	WCDMA	0.421	0.431	0.337	0.00046	1.189
Left Tilted	WCDMA	0.393	0.365	0.280	0.00046	1.038
Right Cheek	LTE	0.723	0.301	0.265	0.00046	1.289
Right Tilted	LTE	0.691	0.239	0.217	0.00046	1.147
Left Cheek	LTE	0.734	0.431	0.337	0.00046	1.502
Left Tilted	LTE	0.695	0.365	0.280	0.00046	1.340
Right Cheek	NR	0.032	0.301	0.265	0.00046	0.598
Right Tilted	NR	0.030	0.239	0.217	0.00046	0.486
Left Cheek	NR	0.038	0.431	0.337	0.00046	0.806
Left Tilted	NR	0.036	0.365	0.280	0.00046	0.681

Note:

1. WWAN + Bluetooth test result less than the WWAN + WLAN (2.4GHz/5GHz) test result, so the WWAN + Bluetooth test result is not show in the test report.

Body-worn SAR
WWAN and WLAN

Position	WWAN		WLAN(2.4GHz/5GHz) -ANT0	WLAN(2.4GHz/5GHz) -ANT1	NFC	Summed SAR (W/kg)
	Band	Scaled SAR (W/kg)	Scaled SAR (W/kg)	Scaled SAR (W/kg)	Scaled SAR (W/kg)	
Back side	GSM	0.494	0.213	0.281	0.00023	0.988
Front side	GSM	0.250	0.167	0.226	0.00023	0.643
Back side	WCDMA	0.595	0.213	0.281	0.00023	1.089
Front side	WCDMA	0.486	0.167	0.226	0.00023	0.879
Back side	LTE	0.647	0.213	0.281	0.00023	1.141
Front side	LTE	0.527	0.167	0.226	0.00023	0.920
Back side	NR	0.060	0.213	0.281	0.00023	0.554
Front side	NR	0.047	0.167	0.226	0.00023	0.440

Note:

1. WWAN + Bluetooth test result less than the WWAN + WLAN (2.4GHz/5GHz) test result, so the WWAN + Bluetooth test result is not show in the test report.

Hotspot SAR
WWAN and WLAN

Position	WWAN		WLAN(2.4GHz/5GHz) -ANT0	WLAN(2.4GHz/5GHz) -ANT1	NFC	Summed SAR (W/kg)
	Band	Scaled SAR (W/kg)	Scaled SAR (W/kg)	Scaled SAR (W/kg)	Scaled SAR (W/kg)	
Back	GSM	0.669	0.083	0.124	0.00023	0.876
Front	GSM	0.451	0.057	0.101	0.00023	0.609
Right side	GSM	0.403	0.052	0.054	0.00023	0.509
Left side	GSM	0.225	--	--	0.00023	0.225
Bottom side	GSM	0.430	--	--	0.00023	0.430
Top side	GSM	0.119	--	0.084	0.00023	0.203
Back	WCDMA	0.287	0.083	0.124	0.00023	0.494
Front	WCDMA	0.355	0.057	0.101	0.00023	0.513
Right side	WCDMA	0.203	0.052	0.054	0.00023	0.309
Left side	WCDMA	0.204	--	--	0.00023	0.204
Bottom side	WCDMA	0.196	--	--	0.00023	0.196
Top side	WCDMA	0.186	--	0.084	0.00023	0.270
Back	LTE	0.647	0.083	0.124	0.00023	0.854
Front	LTE	0.428	0.057	0.101	0.00023	0.586
Right side	LTE	0.535	0.052	0.054	0.00023	0.641
Left side	LTE	0.332	--	--	0.00023	0.332
Bottom side	LTE	0.642	--	--	0.00023	0.642
Top side	LTE	0.369	--	0.084	0.00023	0.453
Back	NR	0.039	0.083	0.124	0.00023	0.246
Front	NR	0.033	0.057	0.101	0.00023	0.191
Right side	NR	0.025	0.052	0.054	0.00023	0.131
Left side	NR	0.030	--	--	0.00023	0.030
Bottom side	NR	0.018	--	--	0.00023	0.018
Top side	NR	0.029	--	0.084	0.00023	0.165

WWAN and WLAN and Bluetooth

Position	WWAN		Bluetooth	WLAN(2.4GHz/5GHz) -ANT1	NFC	Summed SAR (W/kg)
	Band	Scaled SAR (W/kg)	Scaled SAR (W/kg)	Scaled SAR (W/kg)	Scaled SAR (W/kg)	
Back	GSM	0.669	0.083	0.135	0.00023	0.887
Front	GSM	0.451	0.057	0.083	0.00023	0.591
Right side	GSM	0.403	0.052	0.039	0.00023	0.494
Left side	GSM	0.225	--	--	0.00023	0.225
Bottom side	GSM	0.430	--	--	0.00023	0.430
Top side	GSM	0.119	--	0.044	0.00023	0.163
Back	WCDMA	0.287	0.083	0.135	0.00023	0.505
Front	WCDMA	0.355	0.057	0.083	0.00023	0.495
Right side	WCDMA	0.203	0.052	0.039	0.00023	0.294
Left side	WCDMA	0.204	--	--	0.00023	0.204
Bottom side	WCDMA	0.196	--	--	0.00023	0.196
Top side	WCDMA	0.186	--	0.044	0.00023	0.230
Back	LTE	0.647	0.083	0.135	0.00023	0.865
Front	LTE	0.428	0.057	0.083	0.00023	0.568
Right side	LTE	0.535	0.052	0.039	0.00023	0.626
Left side	LTE	0.332	--	--	0.00023	0.332
Bottom side	LTE	0.642	--	--	0.00023	0.642
Top side	LTE	0.369	--	0.044	0.00023	0.413
Back	NR	0.039	0.083	0.135	0.00023	0.257
Front	NR	0.033	0.057	0.083	0.00023	0.173
Right side	NR	0.025	0.052	0.039	0.00023	0.116
Left side	NR	0.030	--	--	0.00023	0.030
Bottom side	NR	0.018	--	--	0.00023	0.018
Top side	NR	0.029	--	0.044	0.00023	0.073

10. Measurement Uncertainty

10.1 Uncertainty for SAR Test

a	b	c	d	e= f(d,k)	f	g	h= c*f/e	i= c*g/e	k
Uncertainty Component	Sec.	Tol (+- %)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	Vi
Measurement System									
Probe calibration	E.2.1	7.0	N	1	1	1	7.00	7.00	∞
Axial Isotropy	E.2.2	2.5	R	$\sqrt{3}$	$(1_{Cp})^{1/2}$	$(1_{Cp})^{1/2}$	1.02	1.02	∞
Hemispherical Isotropy	E.2.2	4.0	R	$\sqrt{3}$	$(Cp)^{1/2}$	$(Cp)^{1/2}$	1.63	1.63	∞
Boundary effect	E.2.3	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Linearity	E.2.4	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	∞
System detection limits	E.2.5	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Readout Electronics	E.2.6	0.02	N	1	1	1	0.02	0.02	∞
Reponse Time	E.2.7	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Integration Time	E.2.8	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	∞
RF ambient Conditions – Noise	E.6.1	0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
RF ambient Conditions - Reflections	E.6.1	0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Probe positioner Mechanical Tolerance	E.6.2	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	∞
Probe positioning with respect to Phantom Shell	E.6.3	0.05	R	$\sqrt{3}$	1	1	0.03	0.03	∞
Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation	E.5	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	∞
Test Sample Related									
Test sample positioning	E.4.2	0.03	N	1	1	1	0.03	0.03	N-1
Device Holder Uncertainty	E.4.1	5.00	N	1	1	1	5.00	5.00	
Output power Variation - SAR drift measurement	E.2.9	12.02	R	$\sqrt{3}$	1	1	6.94	6.94	∞
SAR scaling	E6.5	0.0	R	$\sqrt{3}$	1	1	0.0	0.0	∞
Phantom and Tissue Parameters									
Phantom Uncertainty (Shape and thickness tolerances)	E.3.1	0.05	R	$\sqrt{3}$	1	1	0.03	0.03	∞
Uncertainty in SAR correction for deviations in permittivity and conductivity	E3.2	1.9	R	$\sqrt{3}$	1	0.84	1.10	0.90	∞

Liquid conductivity - deviation from target value	E.3.2	0	R	$\sqrt{3}$	0	0.43	0	0	∞
Liquid conductivity - measurement uncertainty	E.3.3	4.00	N	1	0.64	0.43	1.10	1.10	∞
Liquid permittivity - deviation from target value	E.3.2	0	R	$\sqrt{3}$	0	0.49	0	0	∞
Liquid permittivity - measurement uncertainty	E.3.3	5.00	N	1	0.6	0.49	1.47	1.47	∞
Combined Standard Uncertainty			RSS				10.20	10.00	
Expanded Uncertainty (95% Confidence interval)			K=2				20.40	20.00	

Annex A. Plots of System Performance Check

Please refer to the Annex for SAR

Annex B. Plots of SAR Measurement

Please refer to the Annex for SAR

Annex C. EUT Photos

Please refer to the Annex for SAR

Annex D. Test Setup Photos

Please refer to the Annex for SAR

Annex E. Calibration Certificate

Please refer to the exhibit for the calibration certificate

******* END OF REPORT *******