



RADIO TEST REPORT

Report No:STS1906218W01

Issued for

ITALCOM GROUP

1728Coral Way, Coral Gables, Miami, Florida, United States  
33145(Zip code : 518048)

Product Name:	4G LTE
Brand Name:	NYX
Model Name:	ARGON
Series Model:	N/A
FCC ID:	YPVITALCOMARGON
Test Standard:	FCC Part 22H and 24E

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from STS, All Test Data Presented in this report is only applicable to presented Test sample.



**TEST RESULT CERTIFICATION**

**Applicant's Name** ..... : ITALCOM GROUP  
**Address** ..... : 1728Coral Way, Coral Gables, Miami, Florida, United States  
33145(Zip code : 518048)  
**Manufacture's Name** ..... : Shenzhen Tianruixiang Communication Equipment LIMITED  
**Address** ..... : Rm810, Block E, Taojindi Building, Tenglong Road, Longhua District,  
Shenzhen, China

**Product Description**

**Product Name** ..... : 4G LTE  
**Brand Name** ..... : NYX  
**Model Name** ..... : ARGON  
**Series Model** ..... : N/A

**Test Standards** ..... : FCC Part 22H and 24E

**Test Procedure** ..... KDB 971168 D01 v03r01,ANSI C63.26( 2015)

This device described above has been tested by STS and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of STS, this document only be altered or revised by STS, personal only, and shall be noted in the revision of the document.

**Date of Test** .....

**Date of performance of tests** ..... 21 June 2019 ~ 27 June 2019

**Date of Issue** ..... 28 June 2019

**Test Result** ..... **Pass**

Testing Engineer :

(Chris Chen)

Technical Manager :

(Sunday Hu)

Authorized Signatory :

(Vita Li)





TABLE OF CONTENTS	Page
<b>1 INTRODUCTION</b>	<b>6</b>
1.1 TEST FACTORY	6
1.2 MEASUREMENT UNCERTAINTY	6
<b>2 PRODUCT INFORMATION</b>	<b>7</b>
<b>3 TEST CONFIGURATION OF EQUIPMENT UNDER TEST</b>	<b>9</b>
<b>4 MEASUREMENT INSTRUMENTS</b>	<b>10</b>
<b>5 TEST ITEMS</b>	<b>11</b>
5.1 CONDUCTED OUTPUT POWER	11
5.2 PEAK TO AVERAGE RATIO	12
5.3 TRANSMITTER RADIATED POWER (EIRP/ERP)	13
5.4 OCCUPIED BANDWIDTH	14
5.5 FREQUENCY STABILITY	15
5.6 SPURIOUS EMISSIONS AT ANTENNA TERMINALS	16
5.7 BAND EDGE	17
5.8 FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT	18
<b>APPENDIX A.TESTRESULT</b>	<b>20</b>
A1.CONDUCTED OUTPUT POWER	20
A2. PEAK-TO-AVERAGE RADIO	24
A3. TRANSMITTER RADIATED POWER (EIRP/ERP)	34
A4. OCCUPIED BANDWIDTH (99% OCCUPIED BANDWIDTH/26DB BANDWIDTH)	37
A5.FREQUENCY STABILITY	45
A6. SPURIOUS EMISSIONS AT ANTENNA TERMINALS	50
A7. BAND EDGE	55
A8. FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT	60
<b>APPENDIX BPHOTOS OF TEST SETUP</b>	<b>68</b>

**Revision History**

Rev.	Issue Date	Report NO.	Effect Page	Contents
00	28 June 2019	STS1906218W01	ALL	Initial Issue





## SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

The radiated emission testing was performed according to the procedures of KDB 971168 D01 v03r01 and ANSI C63.26( 2015)

FCC Rules	Test Description	Test Limit	Test Result	Reference
2.1049	Conducted OutputPower	Reporting Only	PASS	
2.0146 24.232	Peak-to-AverageRatio	< 13 dB	PASS	
2.1046 22.913 24.232	Effective Radiated Pow- er/Equivalent Isotropic Radiated Power	< 7 Watts max. ERP(Part 22) < 2 Watts max. EIRP(Part 24)	PASS	
2.1049 22.917 24.238	Occupied Bandwidth	Reporting Only	PASS	
2.1055 22.355 24.235	Frequency Stability	< 2.5 ppm (Part 22) Emission must remain in band (Part 24)	PASS	
2.1051 22.917 24.238	Spurious Emission at Antenna Terminals	< 43+10log10(P[Watts])	PASS	
2.1053 22.917 24.238	Field Strength of Spurious Radiation	< 43+10log10(P[Watts])	PASS	
2.1051 22.917 24.238	Band Edge	< 43+10log10(P[Watts])	PASS	



## 1 INTRODUCTION

### 1.1 TEST FACTORY

Shenzhen STS Test Services Co., Ltd.

Add. : 1/F., Building B, Zhuoke Science Park, No.190, Chongqing Road,  
Fuyong Street, Bao'an District, Shenzhen, Guangdong, China

FCC test Firm Registration Number: 625569

A2LA Certificate No.: 4338.01

### 1.2 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95% level of confidence. The measurement data shown herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

No.	Item	Uncertainty
1	RF output power, conducted	$\pm 0.71\text{dB}$
2	Unwanted Emissions, conducted	$\pm 0.63\text{dB}$
3	All emissions, radiated 30-200MHz	$\pm 3.43\text{dB}$
4	All emissions, radiated 200MHz-1GHz	$\pm 3.57\text{dB}$
5	All emissions, radiated >1G	$\pm 4.13\text{dB}$
6	Conducted Emission (9KHz-150KHz)	$\pm 3.18\text{dB}$
7	Conducted Emission (150KHz-30MHz)	$\pm 2.70\text{dB}$



## 2 PRODUCT INFORMATION

Product Name	4G LTE
Trade Name	NYX
Model Name	ARGON
Series Model	N/A
Model Difference	N/A
Tx Frequency:	GSM/GPRS/EDGE: 850: 824 MHz ~ 849MHz 1900: 1850 MHz ~ 1910MHz WCDMA: Band V: 824 MHz ~ 849 MHz Band II: 1850 MHz ~ 1910 MHz
Rx Frequency:	GSM/GPRS/EDGE: 850: 869 MHz ~ 894 MHz 1900: 1930 MHz ~ 1990MHz WCDMA: Band V: 869 MHz ~ 894 MHz Band II: 1930 MHz ~ 1990 MHz
Max RF Output Power:	GSM850:32.20dBm, PCS1900:29.68dBm GPRS850(1-Slot):28.68dBm, GPRS1900(1-Slot):25.65dBm GPRS850(2-Slot):28.27dBm, GPRS1900(2-Slot):25.25dBm GPRS850(3-Slot):27.77dBm, GPRS1900(3-Slot):24.78dBm GPRS850(4-Slot):27.27dBm, GPRS1900(4-Slot):24.30dBm EDGE 850(1-Slot):25.96dBm, EDGE 1900(1-Slot):25.03dBm EDGE 850(2-Slot):25.16dBm, EDGE 1900(2-Slot):24.24dBm EDGE 850(3-Slot):24.44dBm, EDGE 1900(3-Slot):23.50dBm EDGE 850(4-Slot):23.70dBm, EDGE 1900(4-Slot):22.79dBm WCDMA Band V:22.95dBm, WCDMA Band II:22.56dBm
Type of Emission:	GSM(850): 317KGXW; GSM(1900): 318KGXW GPRS(850): 323KGXW; GPRS(1900): 323KGXW EDGE(850): 325KG7W; EDGE(1900): 316KG7W WCDMA850: 4M65F9W WCDMA1900: 4M65F9W
SIM Card:	Only support single SIM Card.
Antenna:	PIFA Antenna
Antenna gain:	GSM 850: -1dBi ,PCS 1900:-1dBi WCDMA 850: -1dBi, WCDMA1900: -1dBi
Power Supply:	DC 3.8V by battery
Battery parameter:	Capacity: 2700mAh, Rated Voltage: 3.8V



Adapter:	Input: AC100-240V, 0.2A,50/60Hz Output: DC5V, 1000mA
GPRS/EDGE Class:	Multi-Class12
Extreme Vol. Limits:	DC 3.5 V to 4.35 V (Nominal DC3.8V )
Extreme Temp. Tolerance:	-30℃ to +50℃
Hardware version number:	NYX_ARGON_001
Software version number:	NITRO_ARGON_V001R
<b>** Note: The High Voltage 4.35V and Low Voltage 3.5 V was declared by manufacturer, The EUT couldn't be operate normally with higher or lower voltage.</b>	







### 3 TEST CONFIGURATION OF EQUIPMENT UNDER TEST

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 and ANSI C63.26 2015 Power Meas. License Digital Systems with maximum output power.

Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

Radiated emissions were investigated as following frequency range:

1. 30 MHz to 10th harmonic for GSM850 and WCDMA Band V.
2. 30 MHz to 10th harmonic for GSM1900 and WCDMA Band II.

All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

BAND	TEST MODES	
	RADIATED TCS	CONDUCTED TCS
GSM 850	GSM LINK GPRS/EDGE CLASS 12 LINK	GSM LINK GPRS/EDGE CLASS 12 LINK
GSM 1900	GSM LINK GPRS/EDGE CLASS 12 LINK	GSM LINK GPRS/EDGE CLASS 12 LINK
WCDMA BAND V	RMC 12.2KBPS LINK	RMC 12.2KBPS LINK
WCDMA BAND II	RMC 12.2KBPS LINK	RMC 12.2KBPS LINK



#### 4 MEASUREMENT INSTRUMENTS

##### Radiation Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Test Receiver	R&S	ESCI	101427	2018.10.13	2019.10.12
Signal Analyzer	Agilent	N9020A	MY51110105	2019.03.02	2020.03.01
Wireless Communications Test Set	R&S	CMW 500	133884	2019.03.02	2020.03.01
Bilog Antenna	TESEQ	CBL6111D	34678	2017.11.02	2020.11.1
Horn Antenna	SCHWARZBECK	BBHA 9120D(1201)	9120D-1343	2018.10.19	2021.10.18
SHF-EHF Horn Antenna (18G-40GHz)	A-INFO	LB-180400-KF	J211020657	2018.03.11	2021.03.10
Pre-Amplifier(0.1M-3GHz)	EM	EM330	060665	2018.10.13	2019.10.12
Pre-Amplifier (1G-18GHz)	SKET	LNPA-01018G-45	SK2018080901	2018.10.13	2019.10.12
turn table	EM	SC100_1	60531	N/A	N/A
Antenna mast	EM	SC100	N/A	N/A	N/A
Temperature & Humidity	HH660	Mieo	N/A	2018.10.11	2019.10.10
Test SW	BULUN	BL410-E/18.905			

##### RF Connected Test

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Universal Radio communication tester	R&S	CMU200	11764	2018.10.13	2019.10.12
Wireless Communications Test Set	R&S	CMW 500	133884	2019.03.02	2020.03.01
Signal Analyzer	Agilent	N9020A	MY49100060	2018.10.13	2019.10.12
Temperature & Humidity	HH660	Mieo	N/A	2018.10.11	2019.10.10
Test SW	FARAD	LZ-RF /LzRf-3A3			

Equipment with a calibration date of "NCR" shown in this list was not used to make direct calibrated measurements.



## 5 TEST ITEMS

### 5.1 CONDUCTED OUTPUT POWER

#### Test overview

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

#### Test procedures

1. The transmitter output port was connected to the system simulator.
2. Set eut at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.

#### Test setup



## 5.2 PEAK TO AVERAGE RATIO


### TEST OVERVIEW

According to §24.232(d), power measurements for transmissions by stations authorized under this section may be made either in accordance with a commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of §24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 db.

### TEST PROCEDURES

1. The testing follows fcckdb 971168 v03r01 section
2. The eut was connected to the and peak and av system simulator& spectrum analysis reads
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Set the test probe and measure average power of the spectrum analysis

### TEST SETUP

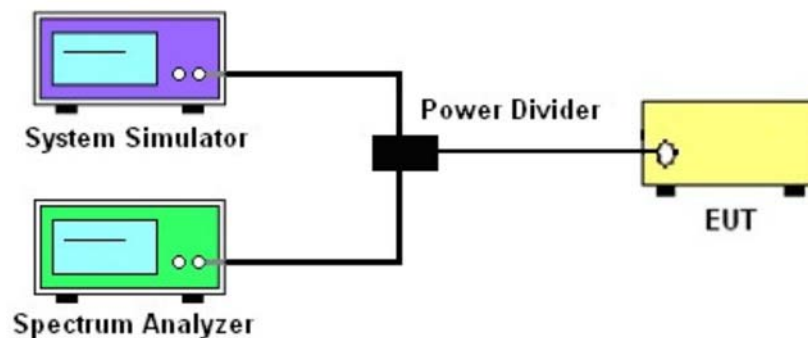



### 5.3 TRANSMITTER RADIATED POWER (EIRP/ERP)

#### TEST OVERVIEW

Effective Radiated Power (ERP) and Equivalent Isotropic Radiated Power (EIRP) measurements are performed using the substitution method described in ANSI C63.26 2015 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically polarized broadband horn antennas. All measurements are performed as RMS average measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

#### TEST PROCEDURE

1. The testing follows FCC KDB 971168 D01 Section 5.2.1. (for CDMA/WCDMA), Section 5.2.2 (for GSM/GPRS/EDGE) and ANSI C63.26-2015 Section 5.2.
2. The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.
3. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
4. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
5. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a nonradiating cable. The absolute levels of the spurious emissions were measured by the substitution.
6. Effective Isotropic Radiated Power (EIRP) was measured by substitution method according to ANSI C63.26-2015. The EUT was replaced by the substitution antenna at same location, and then a known power from S.G. was applied into the dipole antenna through a Tx cable, and then recorded the maximum Analyzer reading through raised and lowered the test antenna. The correction factor (in dB) = S.G. - Tx Cable loss + Substitution antenna gain - Analyzer reading. Then the EUT's EIRP/ERP was calculated with the correction factor,  
$$\text{ERP/EIRP} = \text{P.SG} + \text{GT} - \text{LC}$$
  
ERP/EIRP = effective or equivalent radiated power, respectively (expressed in the same units as P<sub>Meas</sub> as, typically dBW or dBm);  
P<sub>Meas</sub>(PK) = measured transmitter output power or PSD, in dBm or dBW;  
GT = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);  
LC = signal attenuation in the connecting cable between the transmitter and antenna, in dB.



## 5.4 OCCUPIED BANDWIDTH

### TEST OVERVIEW

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured.


The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

All modes of operation were investigated and the worst case configuration results are reported in this section.

### TEST PROCEDURE

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2.  $RBW = 1 - 5\%$  of the expected OBW
3.  $VBW \geq 3 \times RBW$
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

### TEST SETUP

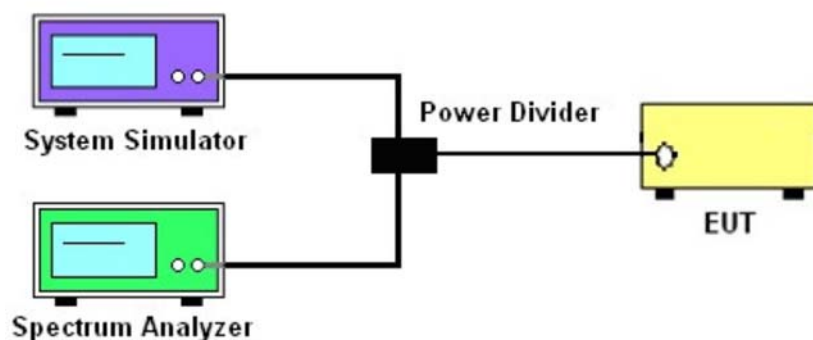

## 5.5 FREQUENCY STABILITY

### Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26 2015. The frequency stability of the transmitter is measured by:

- a.) Temperature: The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

For Part 22, the frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5$  ppm) of the center frequency. For Part 24 the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

### Test Procedure


#### Temperature Variation

1. The testing follows fccdb 971168 D01 section 9.0
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C steps up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

#### Voltage Variation

1. The testing follows FCC KDB 971168 D01 Section 9.0.
2. The EUT was placed in a temperature chamber at  $25 \pm 5^\circ \text{C}$  and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
4. The variation in frequency was measured for the worst case.

### TEST SETUP

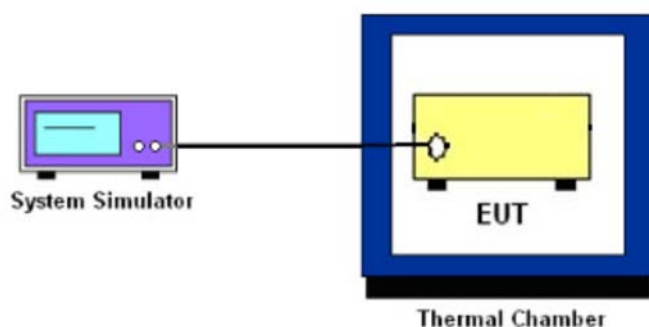



## 5.6 SPURIOUS EMISSIONS AT ANTENNA TERMINALS

### Test Overview


The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

### Test procedure

1. The testing FCC KDB 971168 D01 v03r01 Section 6.0. and ANSI C63.26-2015-Section 5.5
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
7. The limit line is derived from  $43 + 10\log(P)$  dB below the transmitter power P(Watts)  
 $= P(W) - [43 + 10\log(P)]$  (dB)  
 $= [30 + 10\log(P)]$  (dBm) -  $[43 + 10\log(P)]$  (dB)  
 $= -13\text{dBm}$ .

### Test Setup

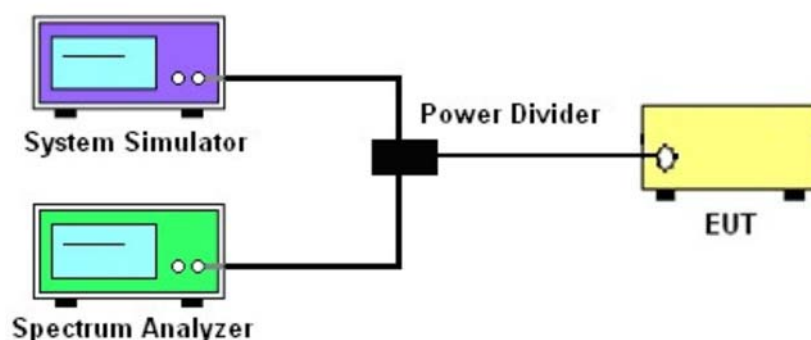





## 5.7 BAND EDGE

### OVERVIEW


All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is  $43 + \log_{10}(P[\text{Watts}])$ , where P is the transmitter power in Watts.

### TEST PROCEDURE

1. The testing FCC KDB 971168 D01 v03r01 Section 6.0. and ANSI C63.26-2015-Section 5.7
2. Start and stop frequency were set such that the band edge would be placed in the center of the Plot.
3. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
4. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
5. The band edges of low and high channels for the highest RF powers were measured.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
7. The limit line is derived from  $43 + 10\log(P)$  dB below the transmitter power P(Watts)  
 $= P(W) - [43 + 10\log(P)] \text{ (dB)}$   
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$   
 $= -13\text{dBm}.$

### TEST SETUP

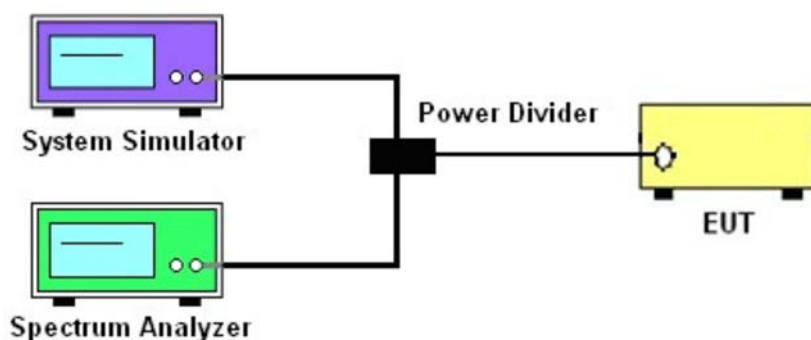



## 5.8 FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT

### Test overview

Radiated spurious emissions measurements are performed using the substitution method described in ANSI C63.26-2015 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using horizontally and vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized horn antennas. All measurements are performed as peak measurements while the EUT is operating at maximum power and at the appropriate frequencies.


It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

### Test procedure


1. The testing FCC KDB 971168 D01 Section 5.8 and ANSI C63.26-2015-Section 5.5.
2. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
3. VBW  $\geq 3 \times$  RBW
4. Span = 1.5 times the OBW
5. No. of sweep points  $> 2 \times$  span/RBW
6. Detector = Peak
7. Trace mode = max hold
8. The trace was allowed to stabilize
9. Effective Isotropic Spurious Radiation was measured by substitution method according to TIA/EIA-603-D. The EUT was replaced by the substitution antenna at same location, and then a known power from S.G. was applied into the dipole antenna through a Tx cable, and then recorded the maximum Analyzer reading through raised and lowered the test antenna. The correction factor (in dB) = S.G. - Tx Cable loss + Substitution antenna gain - Analyzer reading. Then the EUT's EIRP/ERP was calculated with the correction factor,  
$$\text{ERP/EIRP} = \text{P.SG} + \text{GT} - \text{LC}$$
  
ERP/EIRP = effective or equivalent radiated power, respectively (expressed in the same units as P<sub>Meas</sub>, typically dBW or dBm);  
P.SG = measured transmitter output power or PSD, in dBm or dBW;  
GT = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);  
LC = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

## TEST SETUP

For radiated test from 30MHz to 1GHz

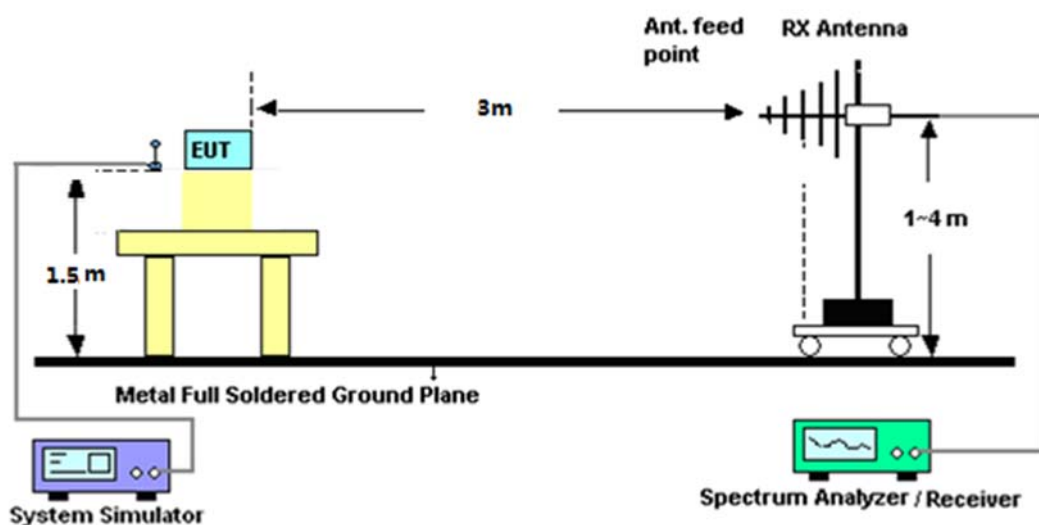

For radiated test from above 1GHz

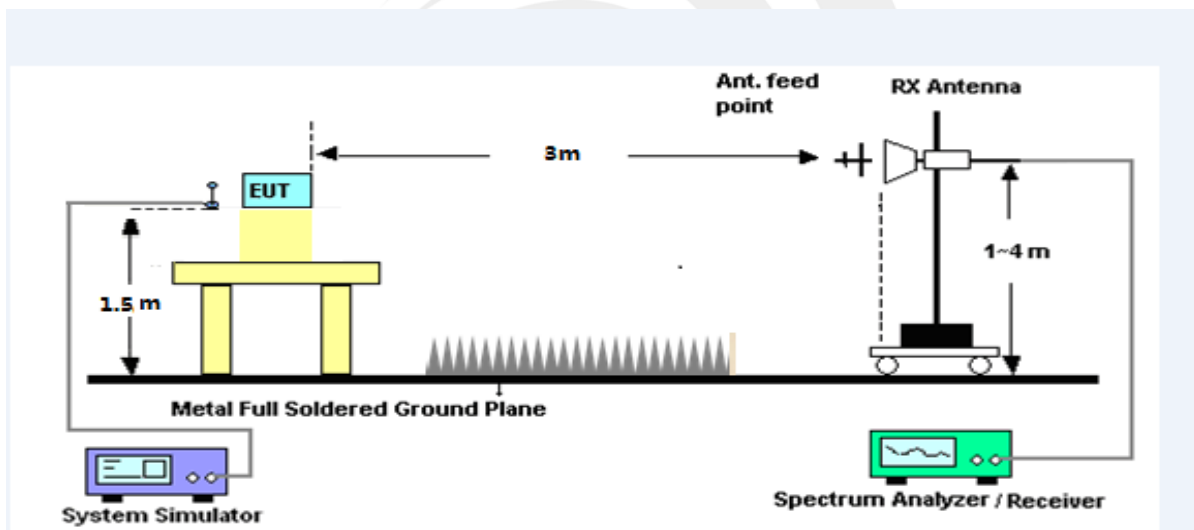



APPENDIX A.TESTRESULT  
A1.CONDUCTED OUTPUT POWER  
GSM 850:

Mode	Frequency (MHz)	AVG Power(dBm)
GSM	824.2	31.93
	836.6	32.06
	848.8	32.20
GPRS(GMSK,1-Slot)	824.2	28.21
	836.6	28.54
	848.8	28.68
GPRS(GMSK,2-Slot)	824.2	27.79
	836.6	28.09
	848.8	28.27
GPRS(GMSK,3-Slot)	824.2	27.32
	836.6	27.68
	848.8	27.77
GPRS(GMSK,4-Slot)	824.2	26.90
	836.6	27.27
	848.8	27.27
EGPRS(8PSK,1-Slot)	824.2	25.91
	836.6	25.98
	848.8	25.96
EGPRS(8PSK,2-Slot)	824.2	25.11
	836.6	25.22
	848.8	25.16
EGPRS(8PSK,3-Slot)	824.2	24.37
	836.6	24.43
	848.8	24.44
EGPRS(8PSK,4-Slot)	824.2	23.65
	836.6	23.72
	848.8	23.70



PCS 1900:

Mode	Frequency (MHz)	AVG Power(dBm)
GSM	1850.2	29.45
	1880.0	29.54
	1909.8	29.68
GPRS(GMSK,1-Slot)	1850.2	25.65
	1880.0	25.56
	1909.8	25.51
GPRS(GMSK,2-Slot)	1850.2	25.25
	1880.0	25.1
	1909.8	25.06
GPRS(GMSK,3-Slot)	1850.2	24.78
	1880.0	24.67
	1909.8	24.61
GPRS(GMSK,4-Slot)	1850.2	24.3
	1880.0	24.24
	1909.8	24.13
EGPRS(8PSK,1-Slot)	1850.2	24.5
	1880.0	25.03
	1909.8	23.95
EGPRS(8PSK,2-Slot)	1850.2	23.73
	1880.0	24.24
	1909.8	23.17
EGPRS(8PSK,3-Slot)	1850.2	22.99
	1880.0	23.50
	1909.8	22.39
EGPRS(8PSK,4-Slot)	1850.2	22.22
	1880.0	22.79
	1909.8	21.64



## UMTS BAND V

Mode	Frequency(MHz)	AVG Power
WCDMA 850 RMC	826.4	22.67
	836.6	22.87
	846.6	22.95
HSDPA Subtest 1	826.4	22.07
	836.6	22.40
	846.6	22.48
HSDPA Subtest 2	826.4	21.59
	836.6	21.99
	846.6	22.00
HSDPA Subtest 3	826.4	21.26
	836.6	21.52
	846.6	21.55
HSDPA Subtest 4	826.4	20.83
	836.6	21.14
	846.6	21.19
HSUPA Subtest 1	826.4	22.01
	836.6	22.33
	846.6	22.04
HSUPA Subtest 2	826.4	21.09
	836.6	21.43
	846.6	21.13
HSUPA Subtest 3	826.4	21.03
	836.6	21.01
	846.6	20.65
HSUPA Subtest 4	826.4	20.72
	836.6	20.68
	846.6	20.19
HSUPA Subtest 5	826.4	19.24
	836.6	19.19
	846.6	18.79



## UMTS BAND II

Mode	Frequency(MHz)	AVG Power
WCDMA 1900 RMC	1852.4	22.50
	1880	22.53
	1907.6	22.56
HSDPA Subtest 1	1852.4	22.33
	1880	21.94
	1907.6	22.18
HSDPA Subtest 2	1852.4	21.93
	1880	21.51
	1907.6	21.71
HSDPA Subtest 3	1852.4	21.49
	1880	21.07
	1907.6	21.37
HSDPA Subtest 4	1852.4	21.12
	1880	20.59
	1907.6	20.96
HSUPA Subtest 1	1852.4	22.27
	1880	21.85
	1907.6	21.68
HSUPA Subtest 2	1852.4	21.33
	1880	20.86
	1907.6	20.69
HSUPA Subtest 3	1852.4	21.21
	1880	20.37
	1907.6	20.28
HSUPA Subtest 4	1852.4	20.72
	1880	20.00
	1907.6	19.86
HSUPA Subtest 5	1852.4	19.23
	1880	18.59
	1907.6	18.42



## A2. PEAK-TO-AVERAGE RADIO

Mode	Frequency (MHz)	PAR (dB)
GSM850	824.2	0.12
	836.6	0.14
	848.8	0.16
GPRS850	824.2	0.07
	836.6	0.07
	848.8	0.07
EDGE850(8PSK)	824.2	3.28
	836.6	3.23
	848.8	3.35
PCS1900	1850.2	0.15
	1880	0.15
	1909.8	0.15
GPRS1900	1850.2	0.07
	1880	0.08
	1909.8	0.08
EDGE1900(8PSK)	1850.2	3.41
	1880	3.40
	1909.8	3.30






Mode	Frequency (MHz)	PAR (dB)
WCDMA 850 RMC	826.4	3.00
	836.6	2.92
	846.6	2.93
HSDPA 850	826.4	3.26
	836.6	3.28
	846.6	3.18
HSUPA 850	826.4	3.27
	836.6	3.14
	846.6	3.15
WCDMA 1900 RMC	1852.4	2.81
	1880	2.81
	1907.6	2.82
HSDPA 1900	1852.4	3.18
	1880	3.15
	1907.6	3.11
HSUPA 1900	1852.4	3.16
	1880	3.15
	1907.6	3.08



## GSM 850

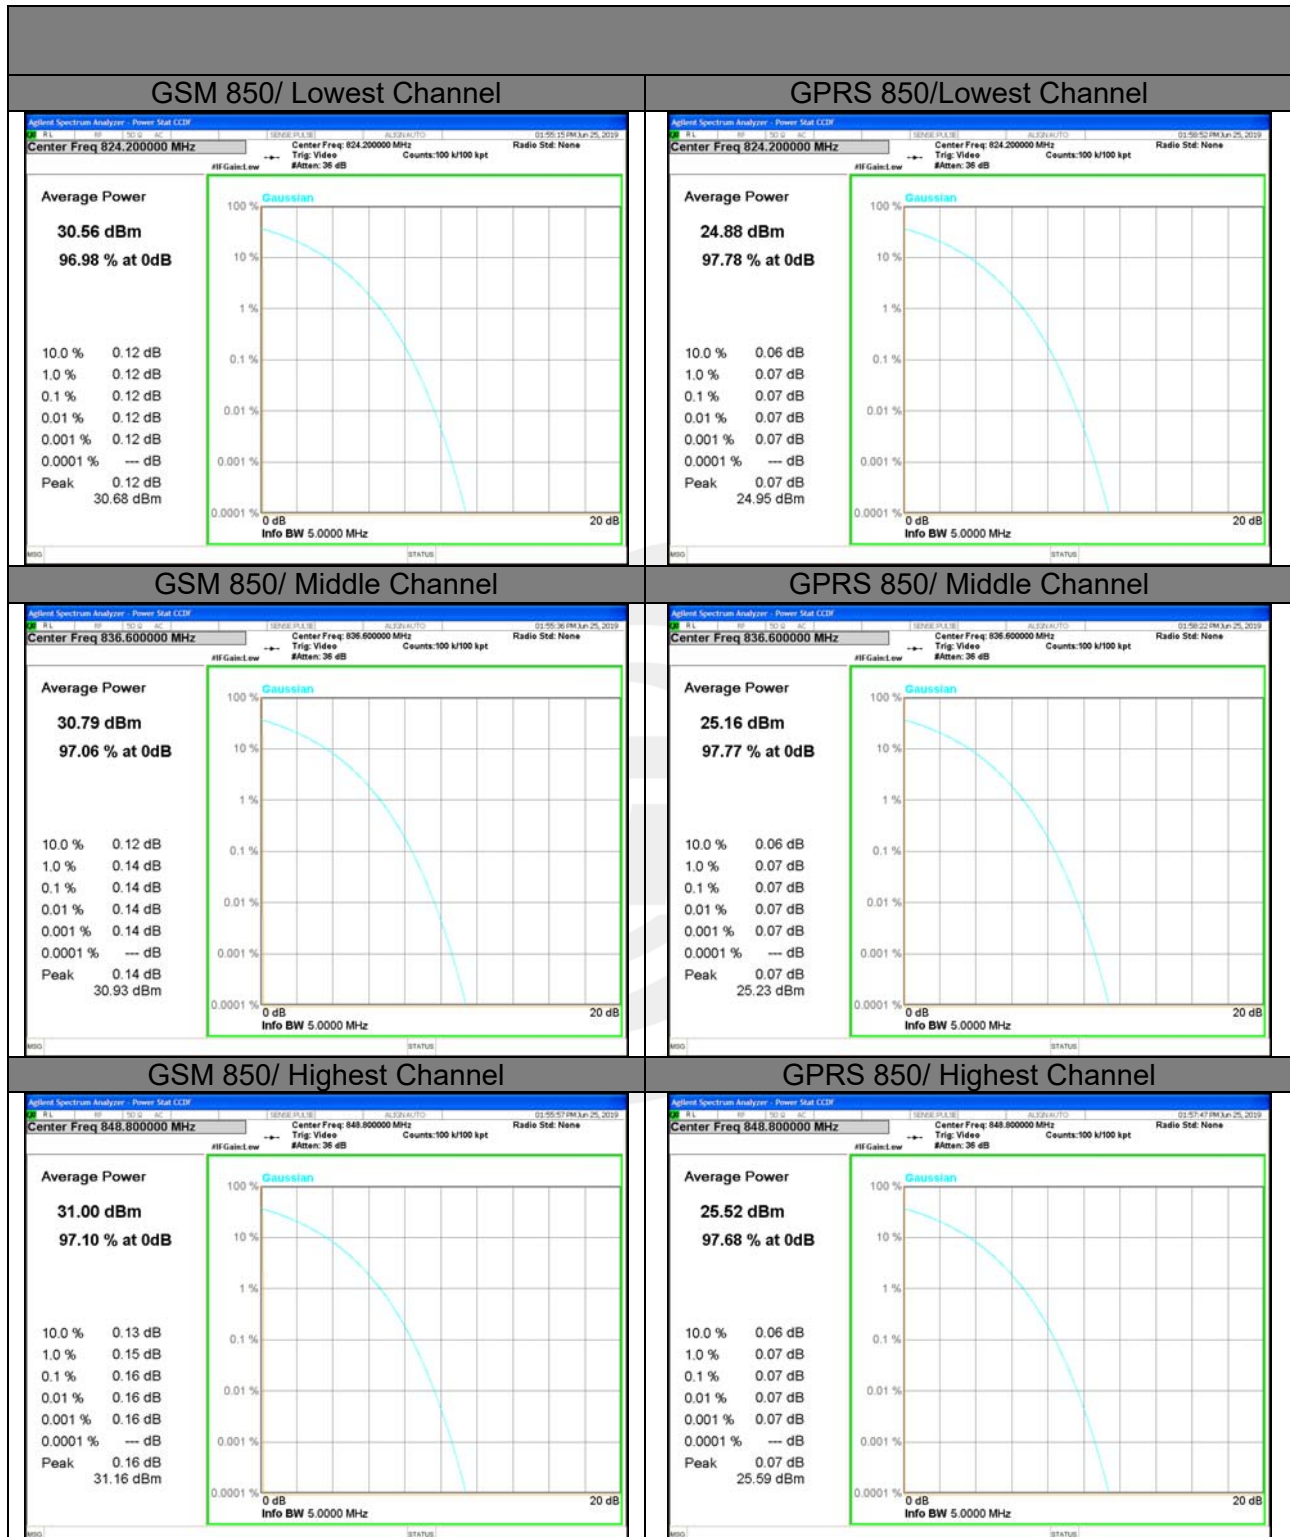



## EDGE 850/ Lowest Channel



## EDGE 850/ Middle Channel





## EDGE 850/ Highest Channel






## PCS 1900

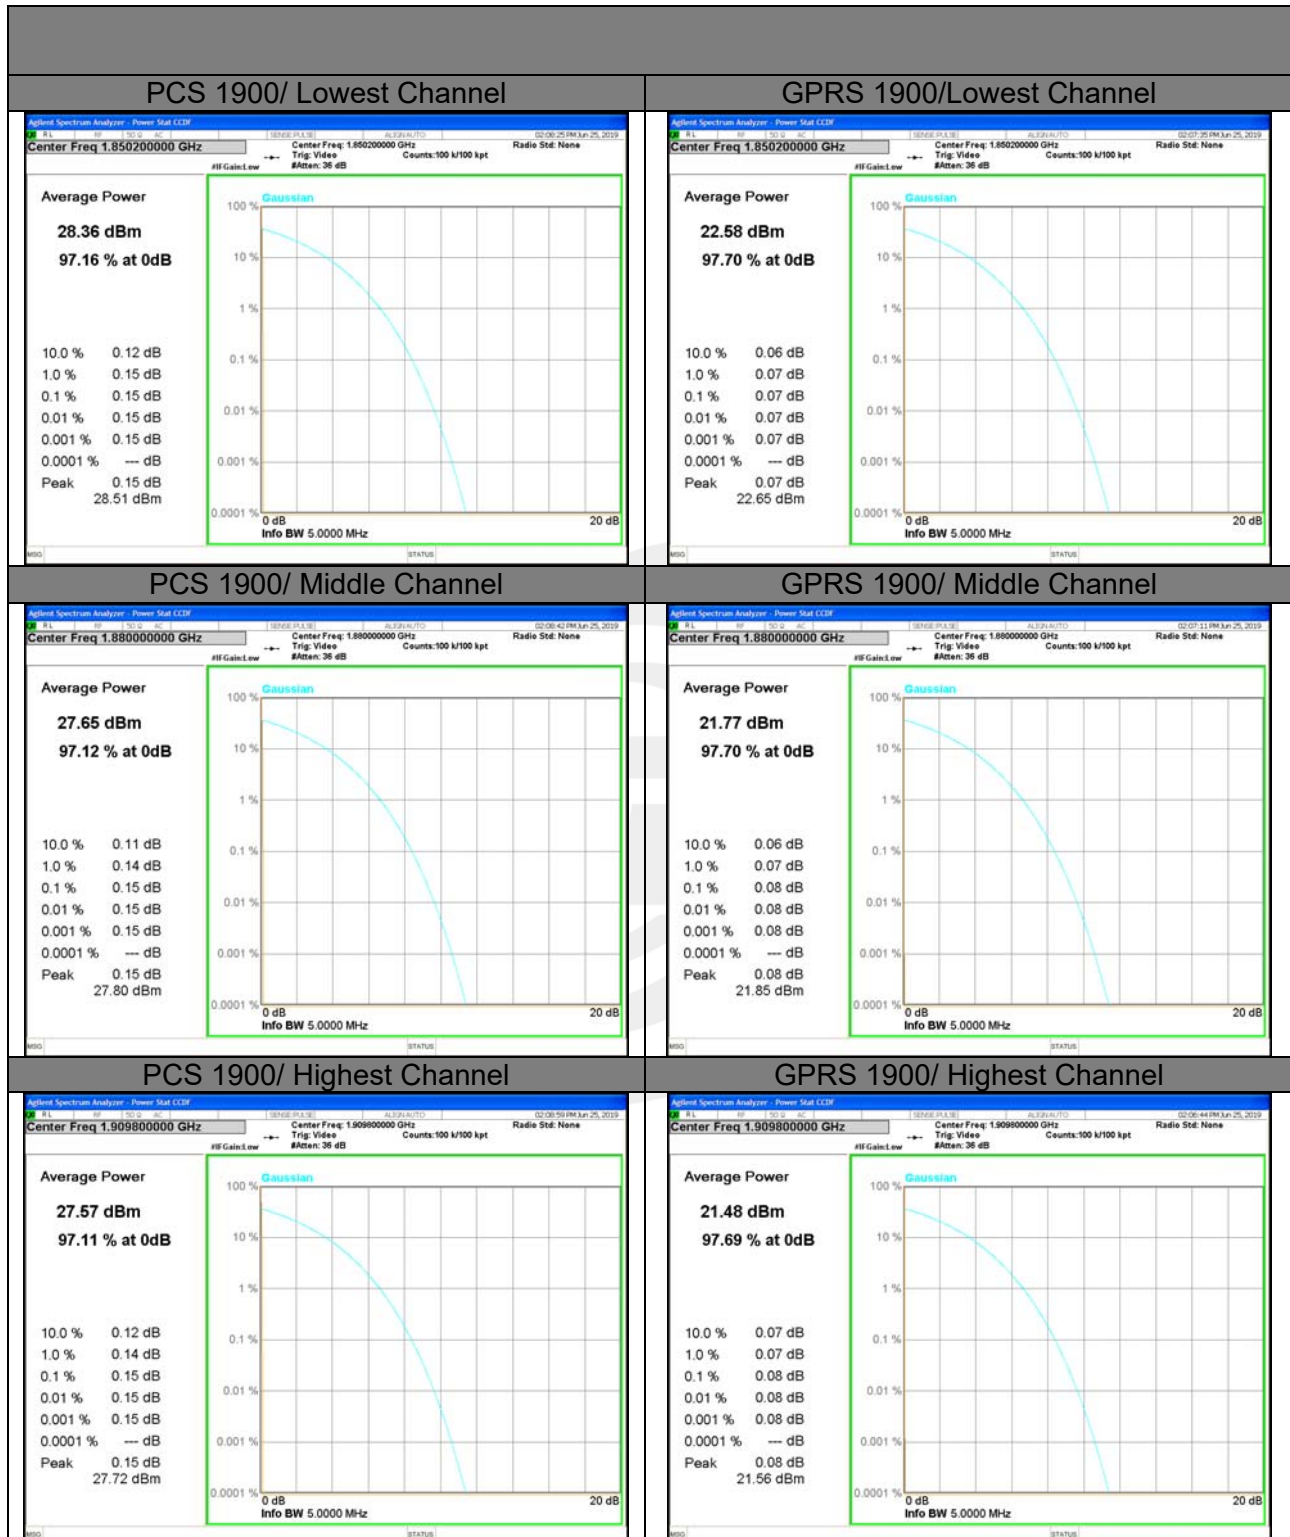

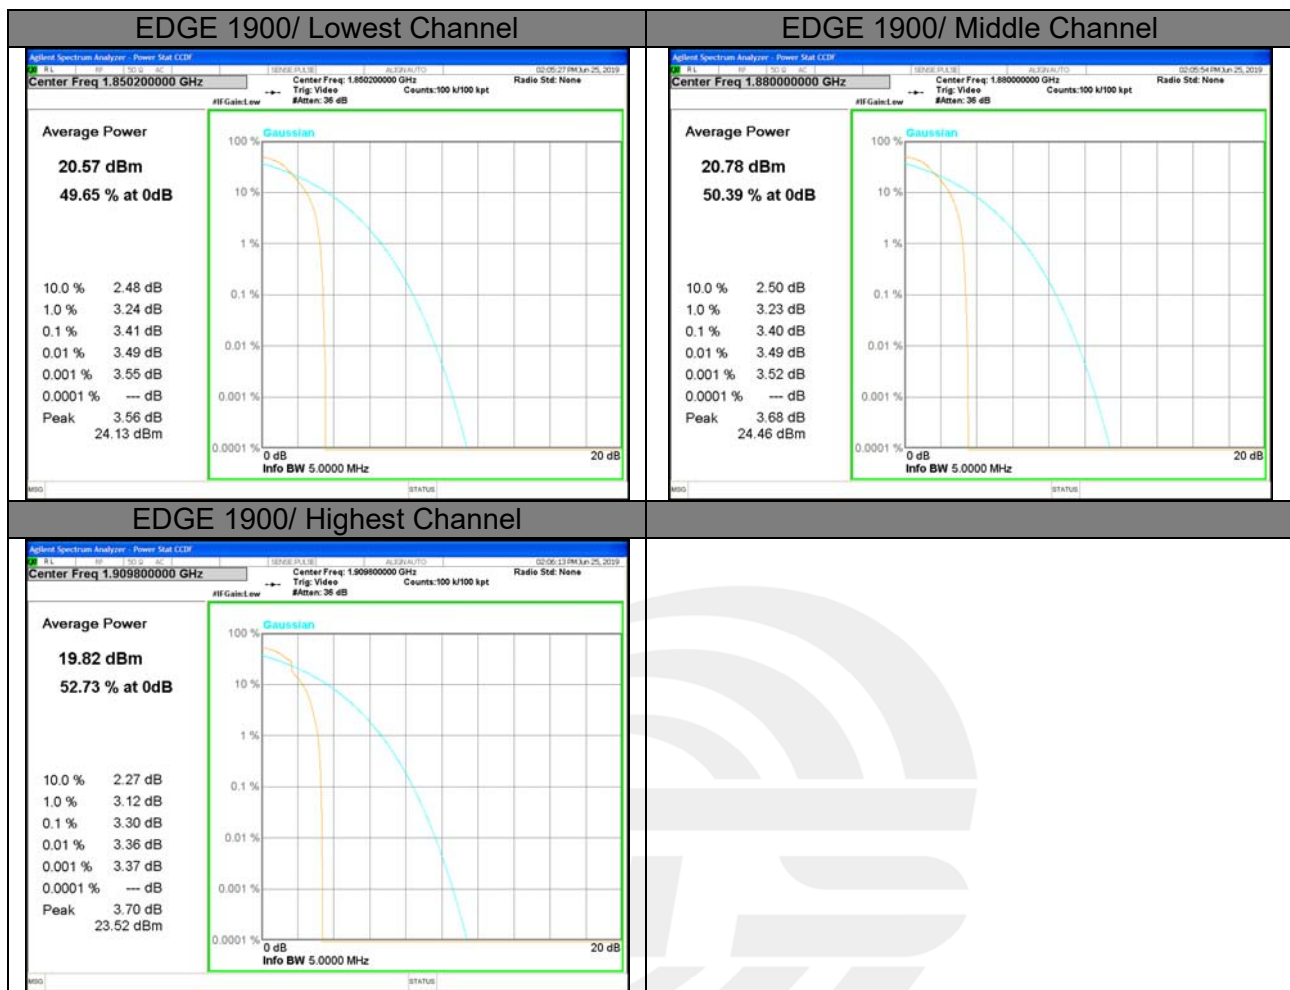




## WCDMA BAND V

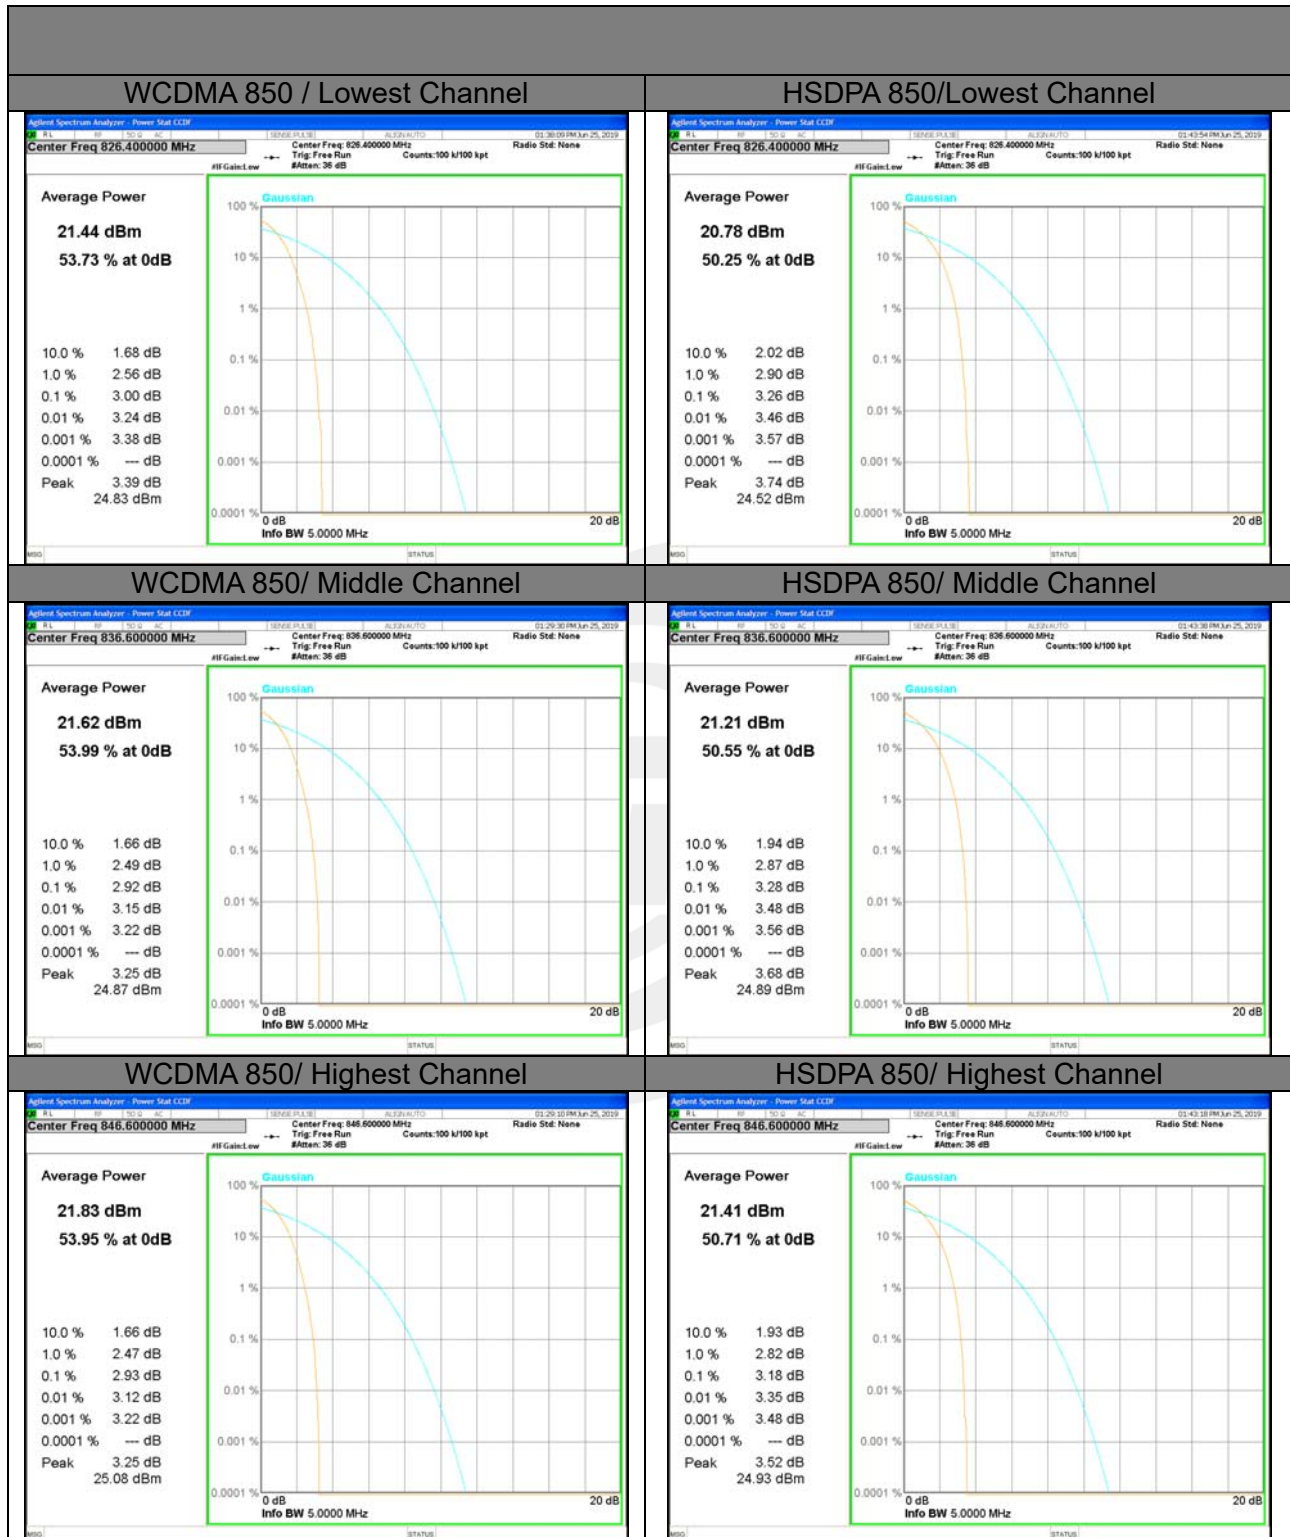




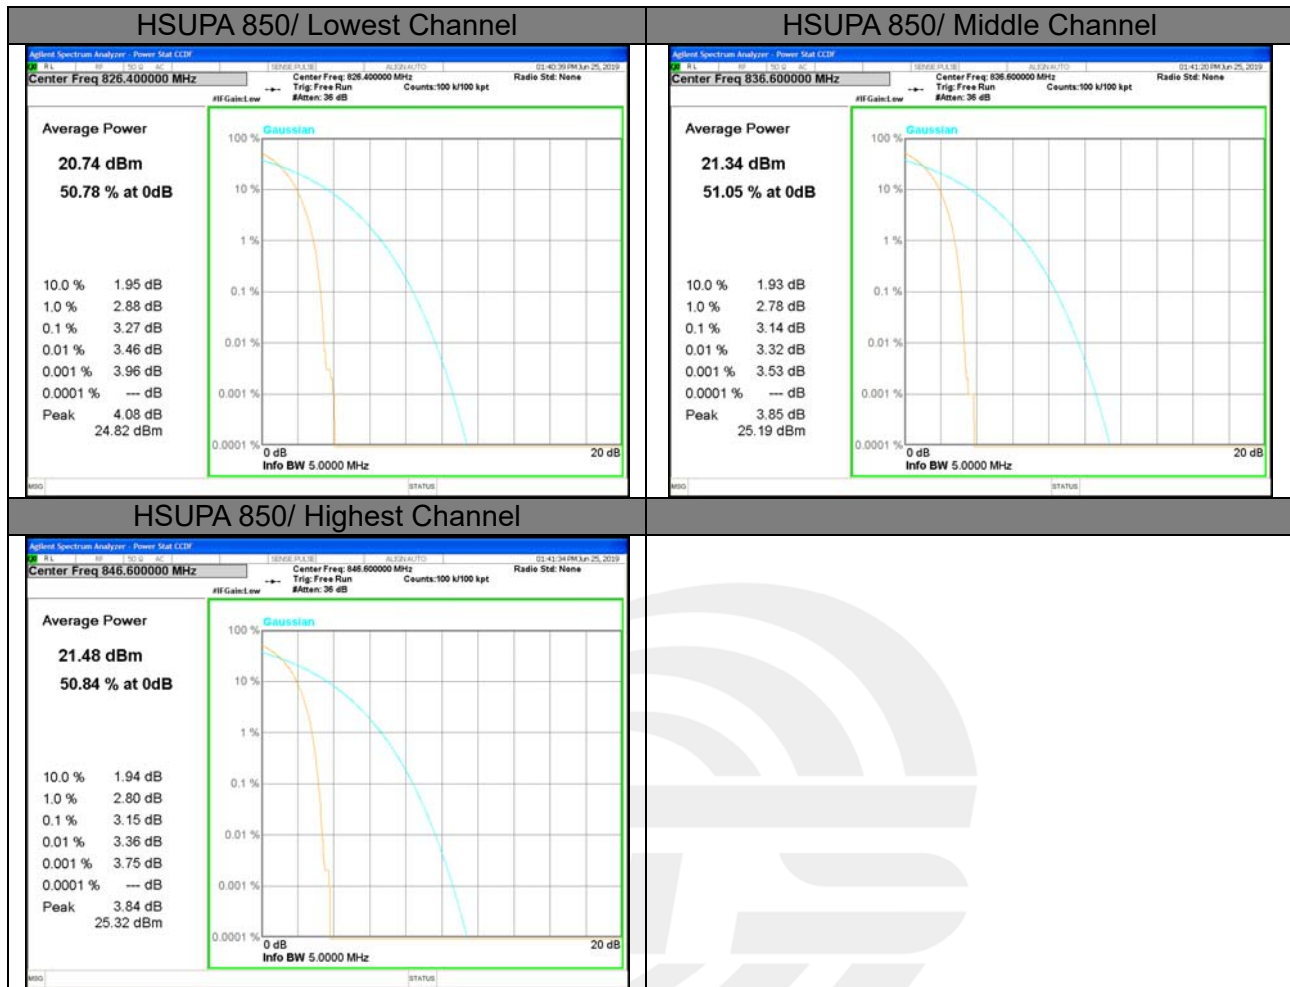



## WCDMA BAND II

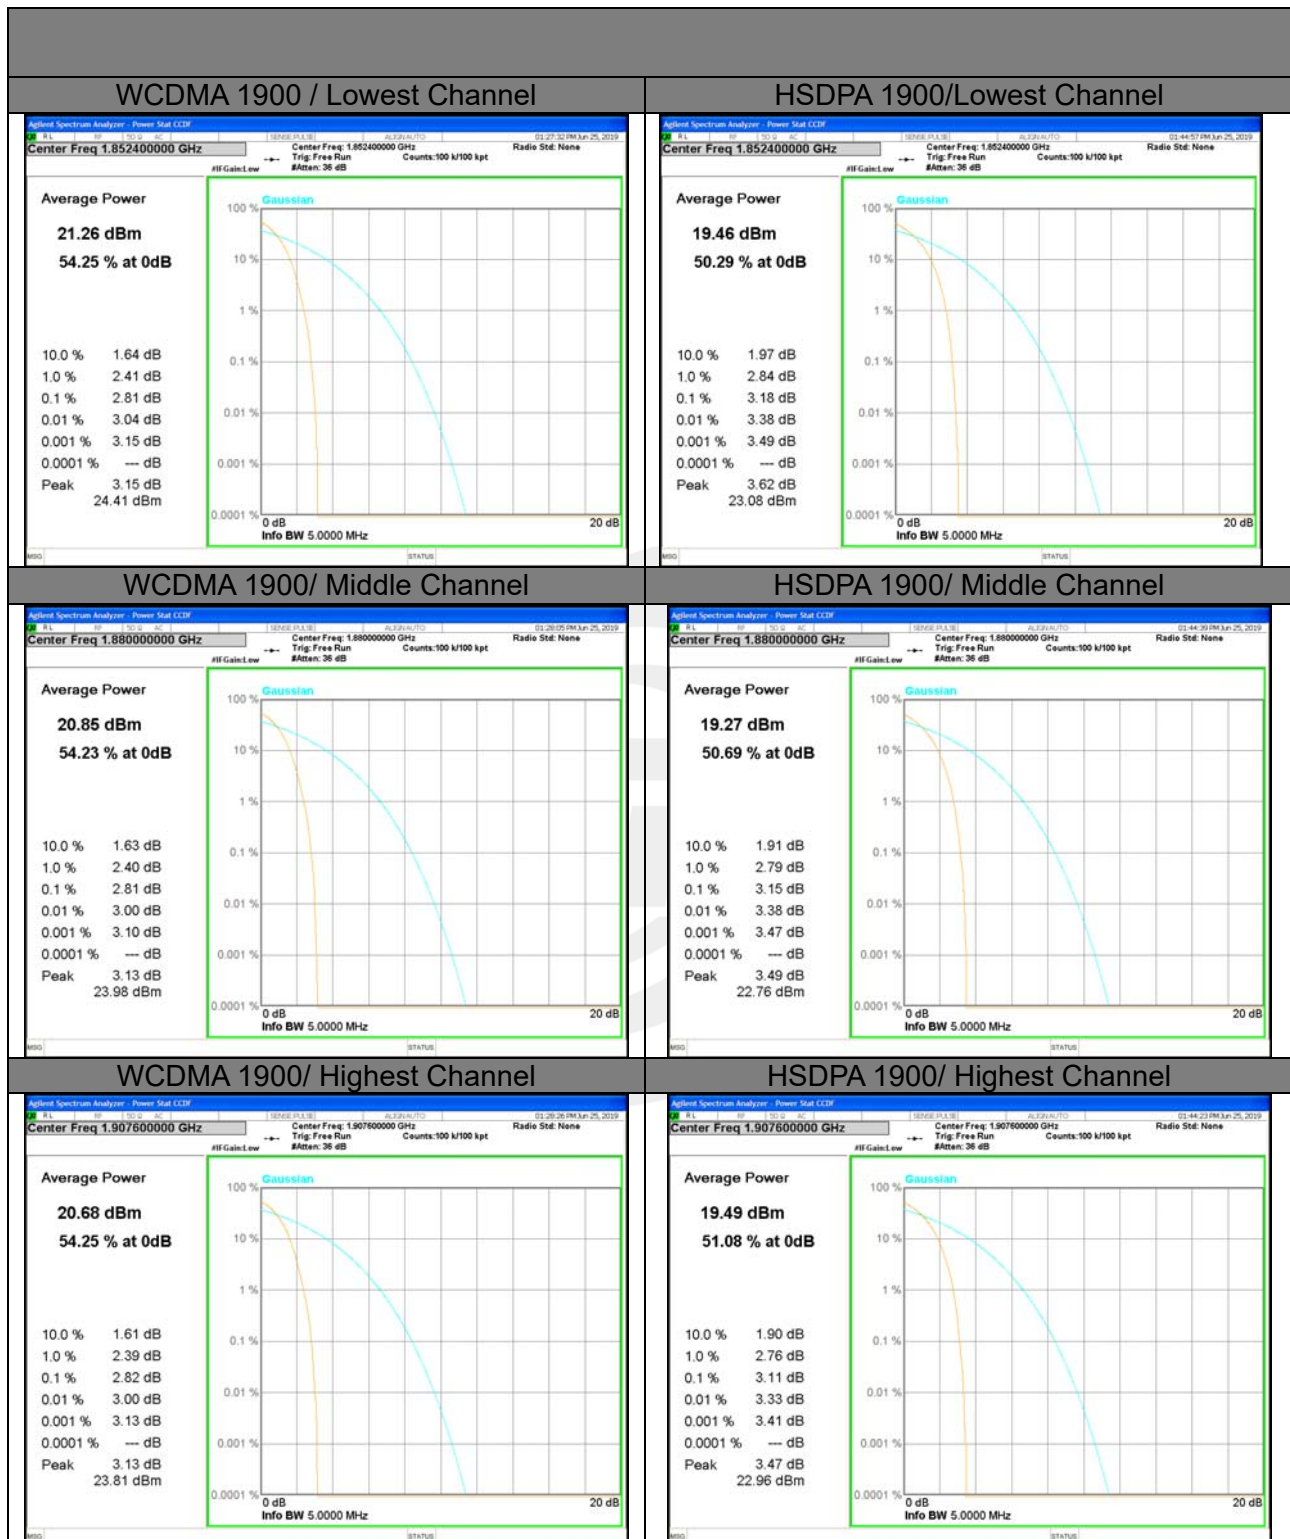





## HSUPA 1900/ Lowest Channel



## HSUPA 1900/ Middle Channel



## HSUPA 1900/ Highest Channel





### A3. TRANSMITTER RADIATED POWER (EIRP/ERP)

Radiated Power (ERP) for GSM 850 MHZ							
Mode	Frequency	Result					Conclusion
		S G.Level (dBm)	Cable loss	Gain (dBi)	PMeas E.R.P(dBm)	Polarization Of Max. ERP	
GSM850	824.2	23.33	0.44	6.5	29.39	Horizontal	Pass
	824.2	25.22	0.44	6.5	31.28	Vertical	Pass
	836.6	23.45	0.45	6.5	29.50	Horizontal	Pass
	836.6	25.45	0.45	6.5	31.50	Vertical	Pass
	848.8	23.61	0.46	6.5	29.65	Horizontal	Pass
	848.8	25.43	0.46	6.5	31.47	Vertical	Pass
GPRS850	824.2	23.45	0.44	6.5	29.51	Horizontal	Pass
	824.2	25.01	0.44	6.5	31.07	Vertical	Pass
	836.6	23.65	0.45	6.5	29.70	Horizontal	Pass
	836.6	25.33	0.45	6.5	31.38	Vertical	Pass
	848.8	23.65	0.46	6.5	29.69	Horizontal	Pass
	848.8	25.14	0.46	6.5	31.18	Vertical	Pass
EDGE850	824.2	23.25	0.44	6.5	29.31	Horizontal	Pass
	824.2	25.08	0.44	6.5	31.14	Vertical	Pass
	836.6	23.74	0.45	6.5	29.79	Horizontal	Pass
	836.6	25.24	0.45	6.5	31.29	Vertical	Pass
	848.8	23.67	0.46	6.5	29.71	Horizontal	Pass
	848.8	25.27	0.46	6.5	31.31	Vertical	Pass
Limit	E.R.P<7W=38.45dBm						

Note: Test is divided into three directions, X/Y/Z. X pattern for the worst.



Radiated Power (EIRP) for PCS 1900 MHZ							
Mode	Frequency	Result					Conclusion
		S G. Level (dBm)	Cable loss	Gain (dBi)	PMeas E.I.R.P.(dBm)	Polarization Of Max. EIRP.	
PCS1900	1850.2	18.72	2.41	10.35	26.66	Horizontal	Pass
	1850.2	20.68	2.41	10.35	28.62	Vertical	Pass
	1880	19.07	2.42	10.35	27	Horizontal	Pass
	1880	20.94	2.42	10.35	28.87	Vertical	Pass
	1909.8	19	2.43	10.35	26.92	Horizontal	Pass
	1909.8	20.98	2.43	10.35	28.9	Vertical	Pass
GPRS1900	1850.2	18.98	2.41	10.35	26.92	Horizontal	Pass
	1850.2	20.66	2.41	10.35	28.6	Vertical	Pass
	1880	19.15	2.42	10.35	27.08	Horizontal	Pass
	1880	20.75	2.42	10.35	28.68	Vertical	Pass
	1909.8	19.02	2.43	10.35	26.94	Horizontal	Pass
	1909.8	20.95	2.43	10.35	28.87	Vertical	Pass
EDGE1900	1850.2	18.79	2.41	10.35	26.73	Horizontal	Pass
	1850.2	20.52	2.41	10.35	28.46	Vertical	Pass
	1880	19.06	2.42	10.35	26.99	Horizontal	Pass
	1880	20.72	2.42	10.35	28.65	Vertical	Pass
	1909.8	19.09	2.43	10.35	27.01	Horizontal	Pass
	1909.8	20.7	2.43	10.35	28.62	Vertical	Pass
Limit	E.I.R.P<2W=33dBm						

Note: Test is divided into three directions, X/Y/Z. X pattern for the worst.



Radiated Power (ERP) for WCDMA Band V							
Mode	Frequency	Result					Conclusion
		S G. Level (dBm)	Cable loss	Gain (dBi)	PMeas E.R.P (dBm)	Polarization Of Max.ERP	
Band V	826.4	13.92	0.44	6.5	19.98	Horizontal	Pass
	826.4	15.91	0.44	6.5	21.97	Vertical	Pass
	836.6	13.91	0.45	6.5	19.96	Horizontal	Pass
	836.6	15.81	0.45	6.5	21.86	Vertical	Pass
	846.4	13.50	0.46	6.5	19.54	Horizontal	Pass
	846.4	15.26	0.46	6.5	21.30	Vertical	Pass
Limit	E.R.P<7W=38.45dBm						

Radiated Power (EIRP) for WCDMA Band II							
Mode	Frequency	Result					Conclusion
		S G. Level (dBm)	Cable loss	Gain (dBi)	PMeas E.I.R.P.(dBm)	Polarization Of Max.EIRP	
Band II	1852.4	12.16	2.41	10.35	20.1	Horizontal	Pass
	1852.4	13.91	2.41	10.35	21.85	Vertical	Pass
	1880	12.22	2.42	10.35	20.15	Horizontal	Pass
	1880	14.04	2.42	10.35	21.97	Vertical	Pass
	1907.4	11.92	2.43	10.35	19.84	Horizontal	Pass
	1907.4	13.81	2.43	10.35	21.73	Vertical	Pass
Limit	E.I.R.P<2W=33dBm						

Note:Test is divided into three directions, X/Y/Z. X pattern for the worst.



## A4. OCCUPIED BANDWIDTH (99% OCCUPIED BANDWIDTH/26dB BANDWIDTH)

Occupied Bandwidth for GSM 850 band			
Mode	Frequency(MHz)	Occupied Bandwidth (99%)( kHz)	Emission Bandwidth (-26dBc)( kHz)
Low Channel	824.2	244.61	315.7
Middle Channel	836.6	245.85	316.8
High Channel	848.8	244.05	314.8
Occupied Bandwidth for GPRS 850 band			
Mode	Frequency(MHz)	Occupied Bandwidth (99%)( kHz)	Emission Bandwidth (-26dBc)( kHz)
Low Channel	824.2	244.32	311.2
Middle Channel	836.6	244.56	321.6
High Channel	848.8	245.04	322.5
Occupied Bandwidth for EGPRS 850 band			
Mode	Frequency(MHz)	Occupied Bandwidth (99%)( kHz)	Emission Bandwidth (-26dBc)( kHz)
Low Channel	824.2	249.96	325.1
Middle Channel	836.6	246.78	309.0
High Channel	848.8	248.11	313.2




Occupied Bandwidth for GSM1900 band			
Mode	Frequency(MHz)	Occupied Bandwidth (99%)( kHz)	Emission Bandwidth (-26dBc)( kHz)
Low Channel	1850.2	243.44	315.2
Middle Channel	1880.0	239.64	313.6
High Channel	1909.8	244.78	316.4
Occupied Bandwidth for GPRS 1900 band			
Mode	Frequency(MHz)	Occupied Bandwidth (99%)( kHz)	Emission Bandwidth (-26dBc)( kHz)
Low Channel	1850.2	244.43	316.6
Middle Channel	1880.0	243.33	322.6
High Channel	1909.8	243.09	311.6
Occupied Bandwidth for EDGE 1900 band			
Mode	Frequency(MHz)	Occupied Bandwidth (99%)( kHz)	Emission Bandwidth (-26dBc)( kHz)
Low Channel	1850.2	241.33	299.1
Middle Channel	1880.0	245.15	318.4
High Channel	1909.8	239.34	310.5



Occupied Bandwidth for UMTS band V			
Mode	Frequency(MHz)	Occupied Bandwidth (99%)( MHz)	Emission Bandwidth (-26dBc)( MHz)
Low Channel	826.4	4.1534	4.646
Middle Channel	836.6	4.1493	4.636
High Channel	846.6	4.1411	4.637

Occupied Bandwidth for UMTS band II			
Mode	Frequency(MHz)	Occupied Bandwidth (99%)( MHz)	Emission Bandwidth (-26dBc)( MHz)
Low Channel	1852.4	4.1464	4.651
Middle Channel	1880	4.1436	4.643
High Channel	1907.6	4.1560	4.639

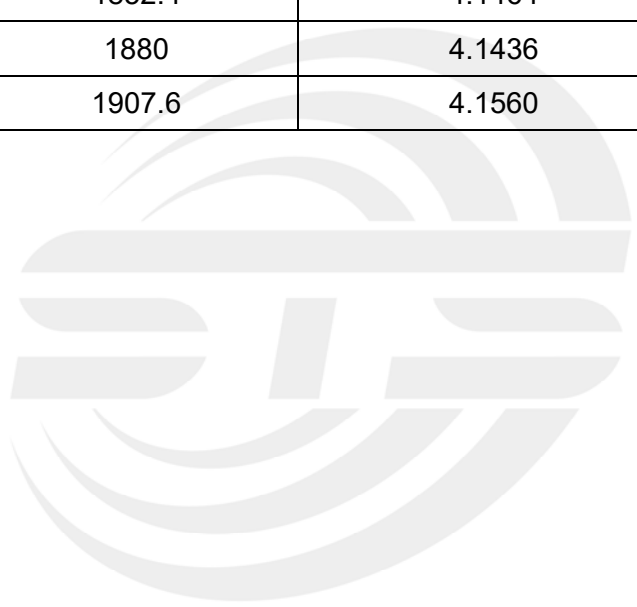










## EDGE 850 CH 128

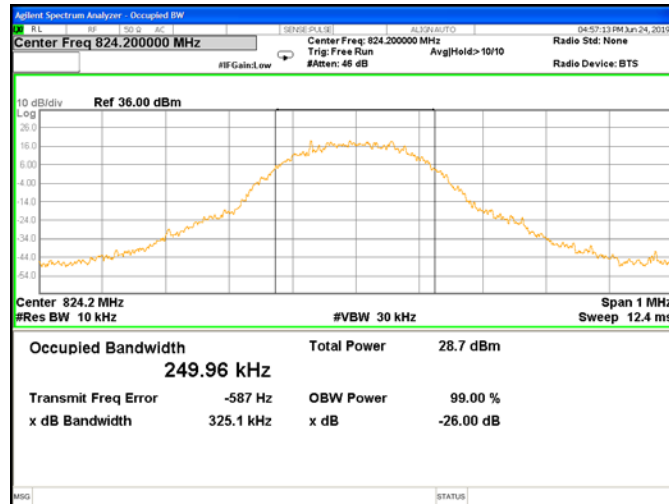

## EDGE 850 CH 190

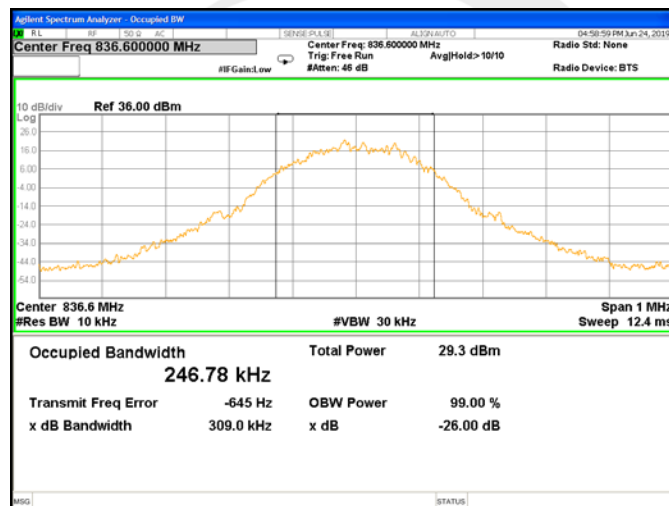


## EDGE 850 CH 251

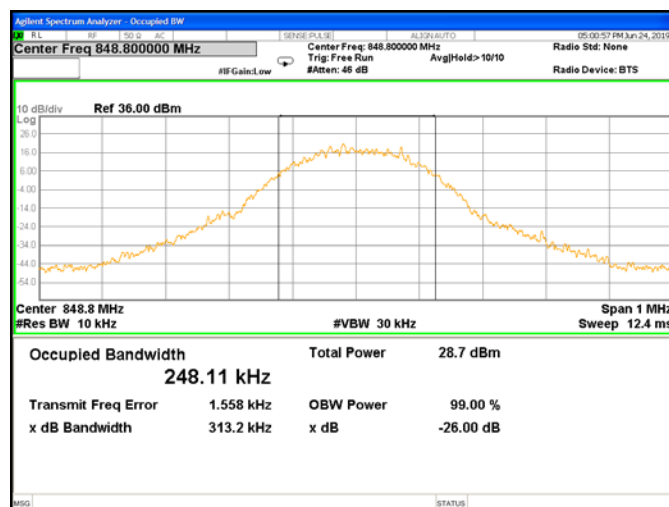





## PCS 1900 CH 512

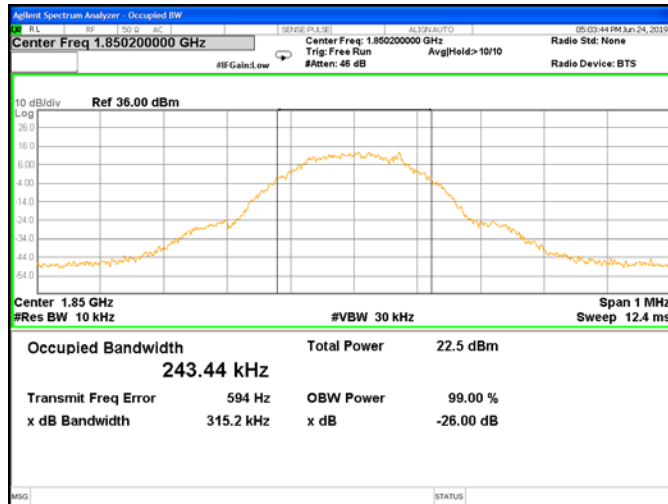


## GPRS 1900 CH 512

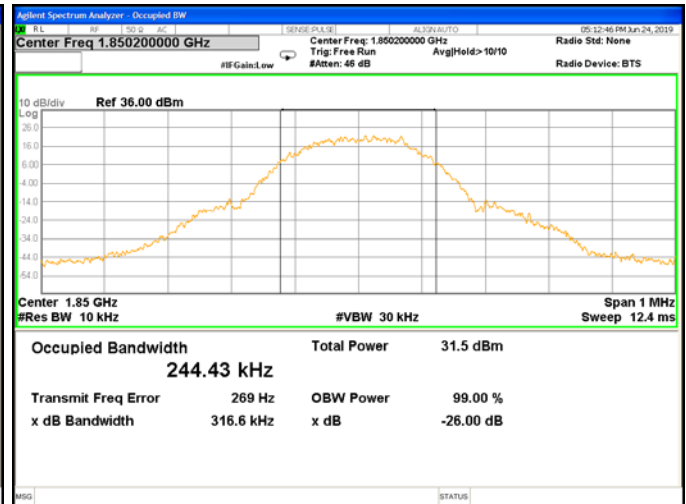


## PCS 1900 CH 661

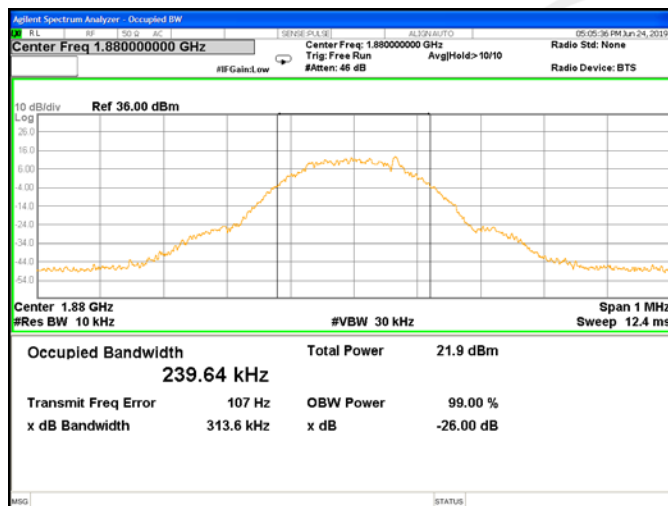


## GPRS 1900 CH 661

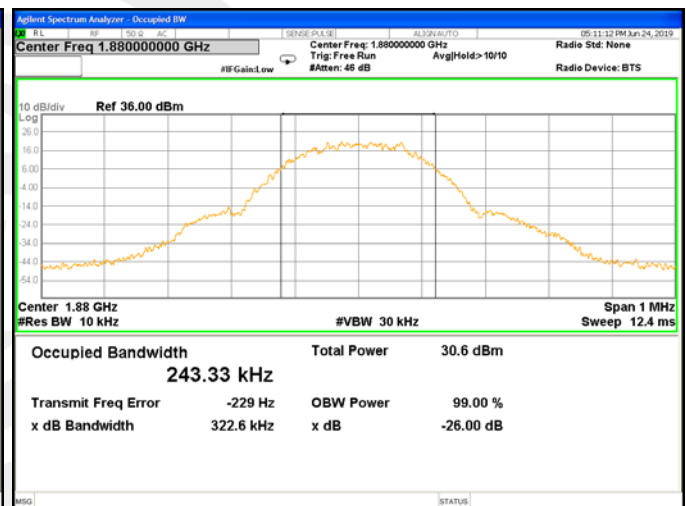

## PCS 1900 CH 810

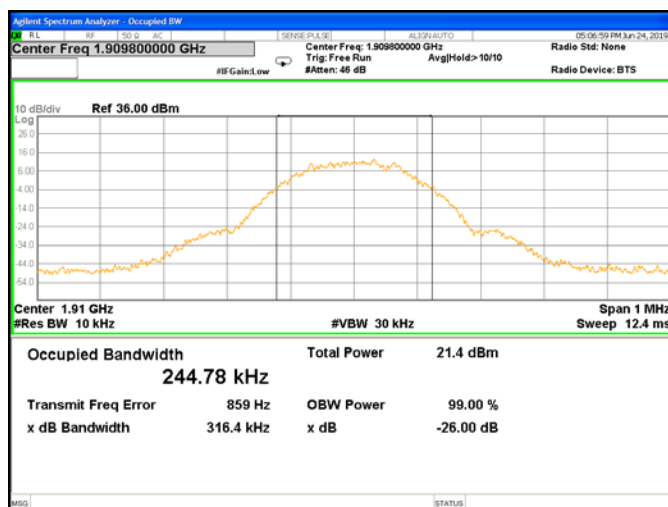


## GPRS 1900 CH 810

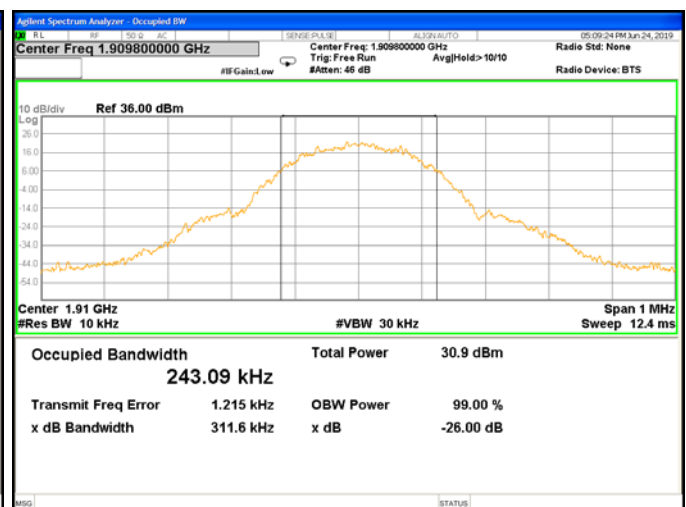




## EDGE 1900 CH 512

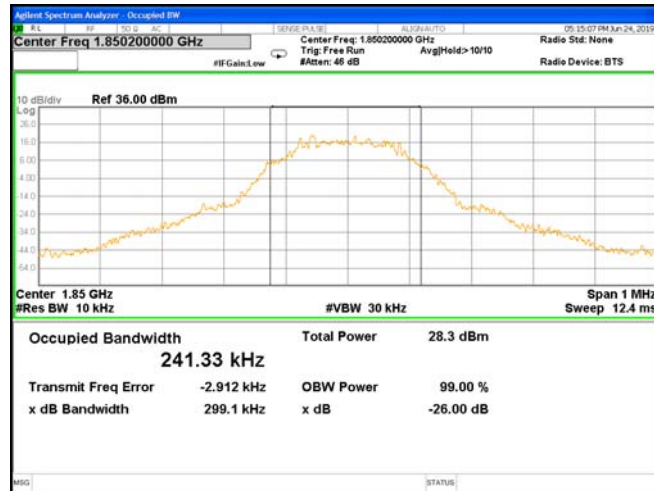

## EDGE 1900 CH 661

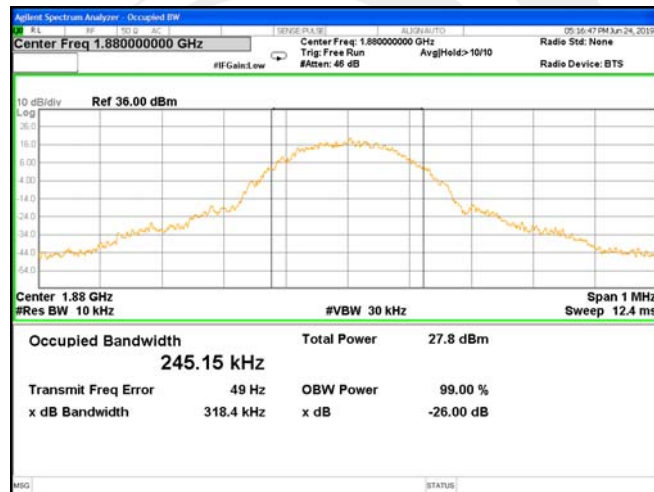


## EDGE 1900 CH 810







## UMTS BAND V CH 4132

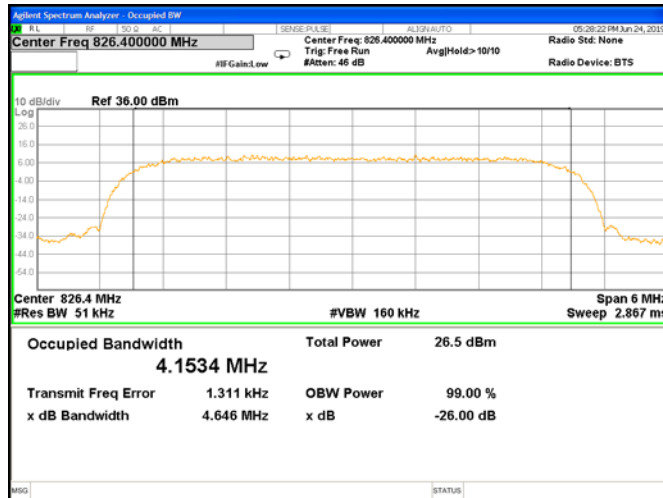


## UMTS BAND II CH 9262

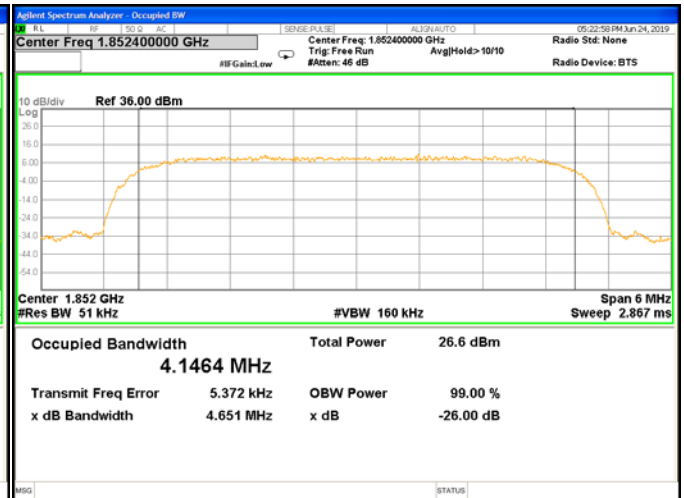


## UMTS BAND V CH 4183

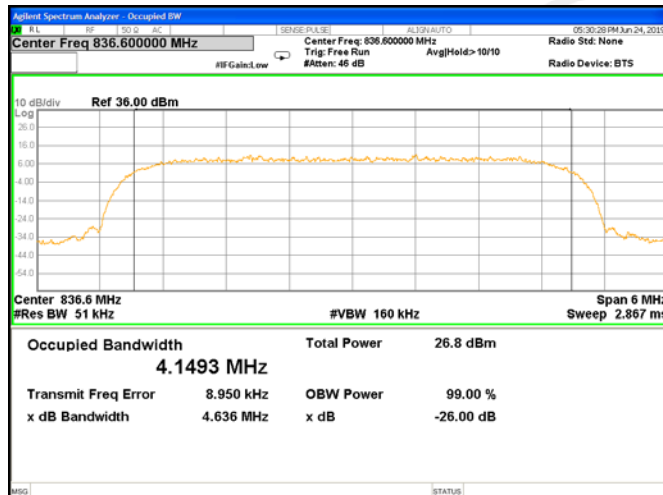


## UMTS BAND II CH 9400

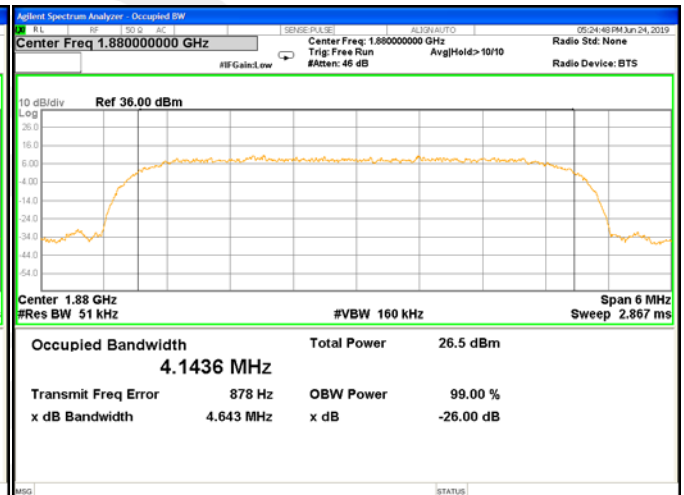

## UMTS BAND V CH 4233

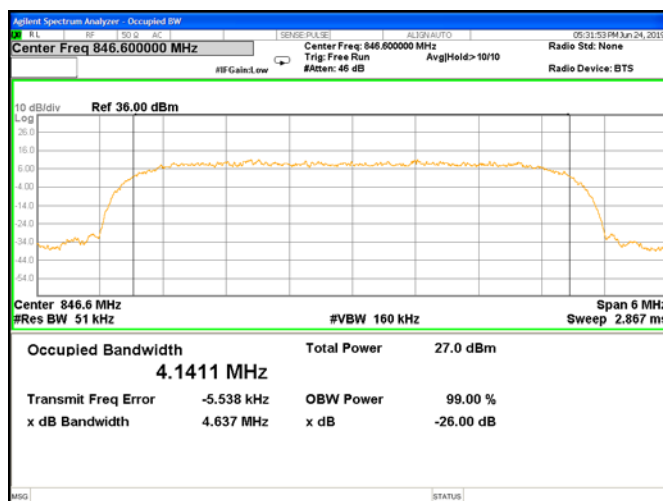

## UMTS BAND II CH 9538

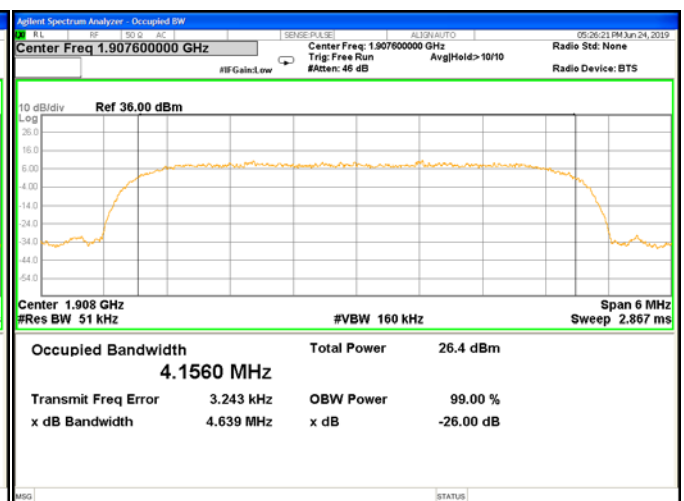



## A5.FREQUENCY STABILITY

Normal Voltage = 3.8V. ;Battery End Point (BEP) = 3.5V.;Maximum Voltage =4.2 V

GSM 850 Middle Channel/836.6MHz					
Temperature (°C)	Voltage (Volt)	Freq. Dev. (Hz)	Freq. Dev. (ppm)	Limit	Result
50	Normal Voltage	12.71	0.015	2.5ppm	PASS
40		23.15	0.028		
30		27.20	0.033		
20		23.69	0.028		
10		26.41	0.032		
0		34.29	0.041		
-10		26.48	0.032		
-20		22.91	0.027		
-30		16.29	0.019		
25	Maximum Voltage	34.30	0.041		
25	BEP	11.99	0.014		

GPRS 850 Middle Channel/836.6MHz					
Temperature (°C)	Voltage (Volt)	Freq. Dev. (Hz)	Freq. Dev. (ppm)	Limit	Result
50	Normal Voltage	35.88	0.043	2.5ppm	PASS
40		21.11	0.025		
30		20.70	0.025		
20		24.79	0.030		
10		35.02	0.042		
0		30.29	0.036		
-10		12.82	0.015		
-20		22.78	0.027		
-30		30.67	0.037		
25	Maximum Voltage	12.57	0.015		
25	BEP	25.37	0.030		



EDGE 850 Middle Channel/836.6MHz					
Temperature (°C)	Voltage (Volt)	Freq. Dev. (Hz)	Freq. Dev. (ppm)	Limit	Result
50	Normal Voltage	33.42	0.040	2.5ppm	PASS
40		30.05	0.036		
30		23.33	0.028		
20		25.28	0.030		
10		20.87	0.025		
0		17.56	0.021		
-10		13.67	0.016		
-20		32.70	0.039		
-30		20.24	0.024		
25	Maximum Voltage	26.13	0.031		
25	BEP	21.97	0.026		



GSM 1900 Middle Channel/1880MHz					
Temperature (°C)	Voltage (Volt)	Freq. Dev. (Hz)	Freq. Dev. (ppm)	Limit	Result
50	Normal Voltage	30.76	0.016	Within Authorized Band	PASS
40		25.12	0.013		
30		32.65	0.017		
20		27.40	0.015		
10		13.37	0.007		
0		22.48	0.012		
-10		33.49	0.018		
-20		27.02	0.014		
-30		17.56	0.009		
25	Maximum Voltage	26.49	0.014		
25	BEP	34.03	0.018		

GPRS 1900 Middle Channel/1880MHz					
Temperature (°C)	Voltage (Volt)	Freq. Dev. (Hz)	Freq. Dev. (ppm)	Limit	Result
50	Normal Voltage	23.98	0.013	Within Authorized Band	PASS
40		19.66	0.010		
30		27.75	0.015		
20		20.78	0.011		
10		13.65	0.007		
0		12.44	0.007		
-10		12.04	0.006		
-20		20.28	0.011		
-30		12.98	0.007		
25	Maximum Voltage	15.00	0.008		
25	BEP	29.57	0.016		



EDGE 1900 Middle Channel/1880MHz					
Temperature (°C)	Voltage (Volt)	Freq. Dev. (Hz)	Freq. Dev. (ppm)	Limit	Result
50	Normal Voltage	34.51	0.018	Within Authorized Band	PASS
40		12.55	0.007		
30		32.57	0.017		
20		11.55	0.006		
10		31.82	0.017		
0		18.11	0.010		
-10		24.11	0.013		
-20		23.30	0.012		
-30		22.41	0.012		
25	Maximum Voltage	29.62	0.016		
25	BEP	14.80	0.008		





WCDMA V Middle Channel/836.6MHz					
Temperature (°C)	Voltage (Volt)	Freq. Dev. (Hz)	Freq. Dev. (ppm)	Limit	Result
50	Normal Voltage	13.78	0.016	2.5ppm	PASS
40		30.50	0.036		
30		30.41	0.036		
20		24.16	0.029		
10		34.29	0.041		
0		34.44	0.041		
-10		11.66	0.014		
-20		12.65	0.015		
-30		15.16	0.018		
25	Maximum Voltage	32.59	0.039		
25	BEP	21.76	0.026		

1. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

WCDMA II Middle Channel/1880MHz					
Temperature (°C)	Voltage (Volt)	Freq. Dev. (Hz)	Freq. Dev. (ppm)	Limit	Result
50	Normal Voltage	17.02	0.009	Within Authorized Band	PASS
40		11.61	0.006		
30		17.02	0.009		
20		12.18	0.006		
10		22.31	0.012		
0		35.12	0.019		
-10		28.44	0.015		
-20		16.34	0.009		
-30		28.44	0.015		
25	Maximum Voltage	23.27	0.012		
25	BEP	15.37	0.008		

1. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.





## A6. SPURIOUS EMISSIONS AT ANTENNA TERMINALS

GSM 850 BAND

GPRS 850 BAND



Lowest Channel

Lowest Channel

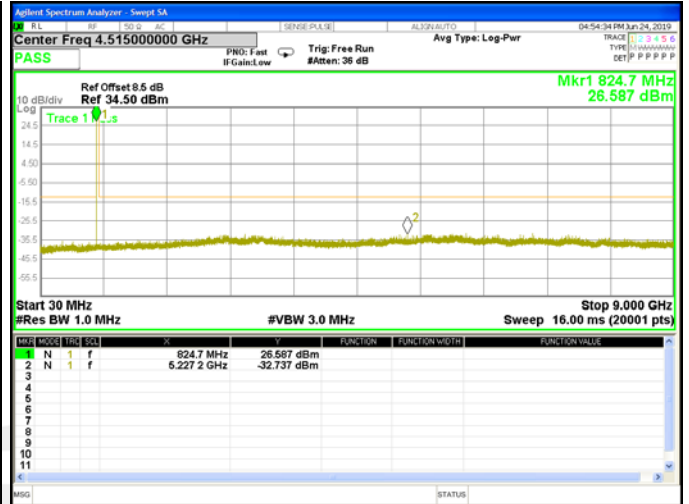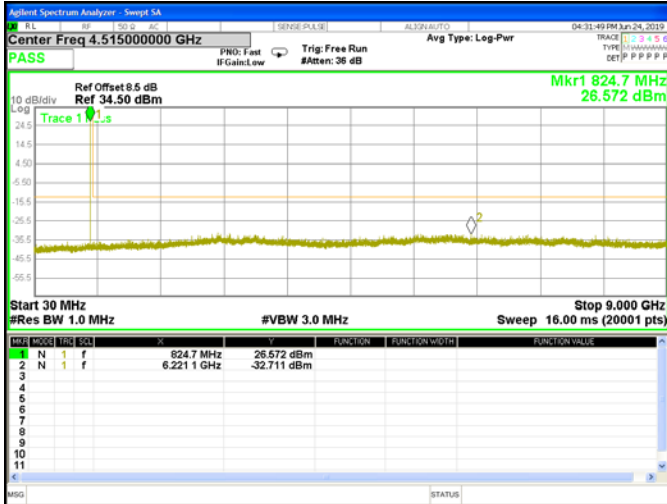



Middle Channel

Middle Channel

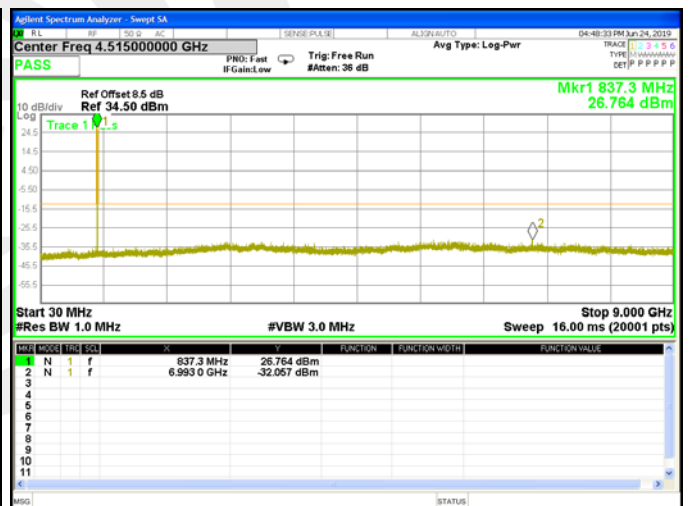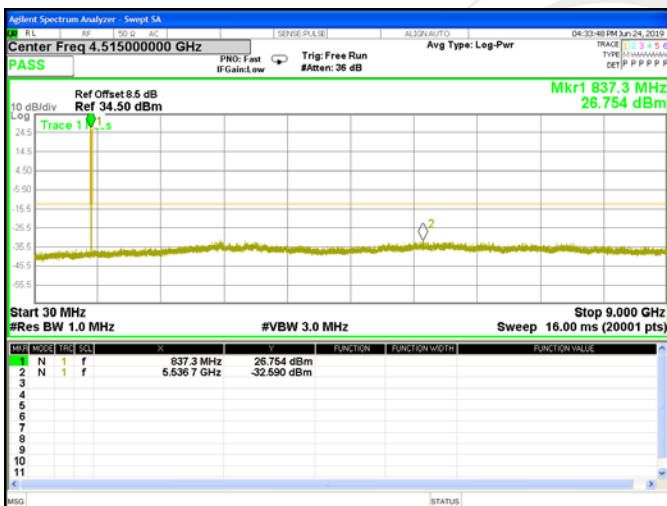

Highest Channel


Highest Channel

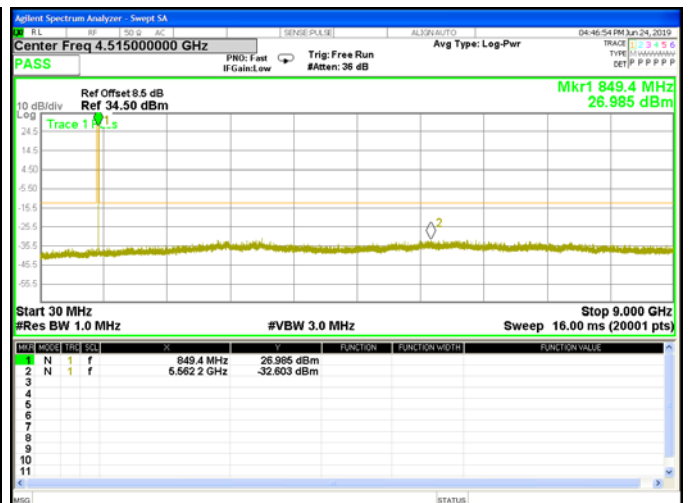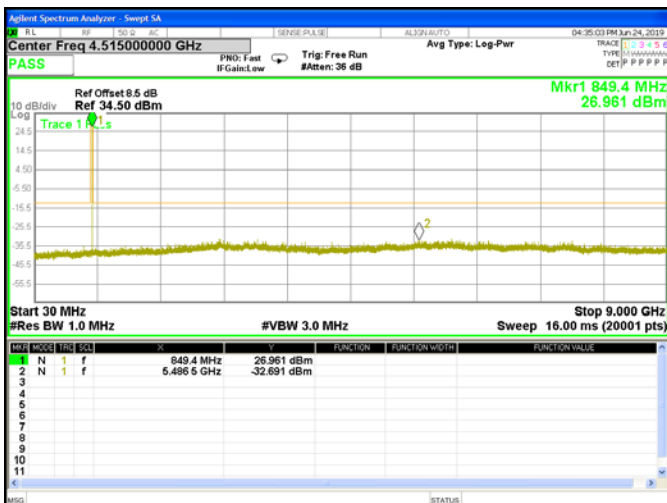




## EDGE 850 BAND


## Lowest Channel

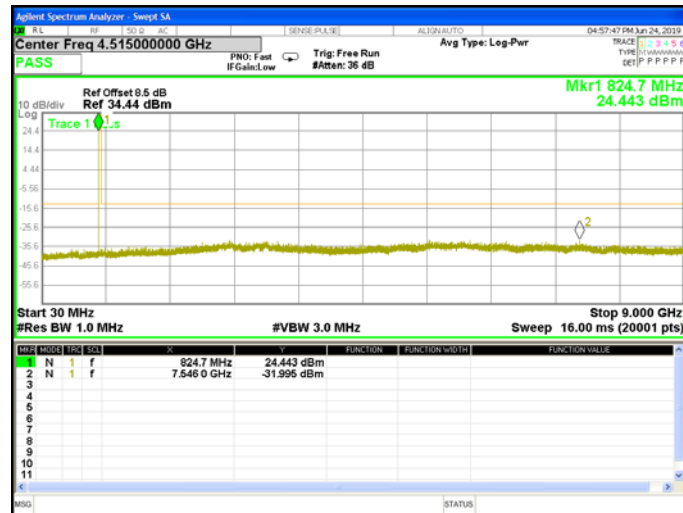

## Middle Channel

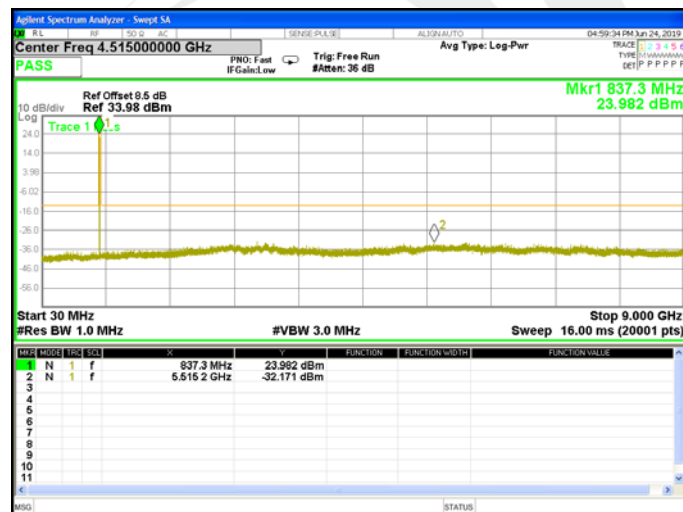


## Highest Channel

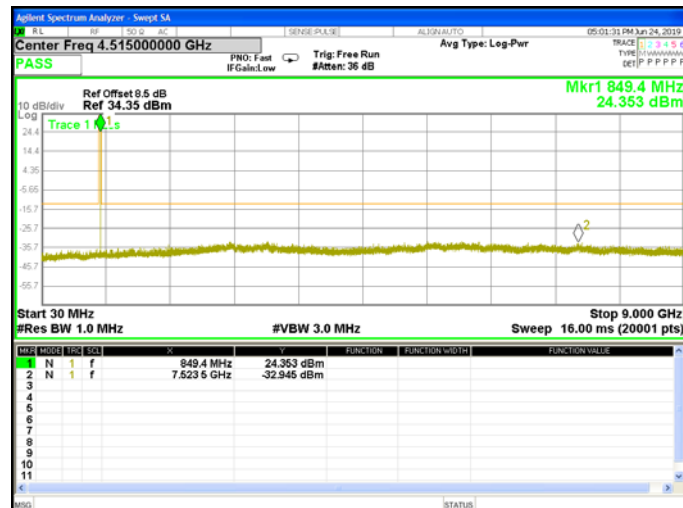




## GSM1900 BAND(30M-20G)


## Lowest Channel

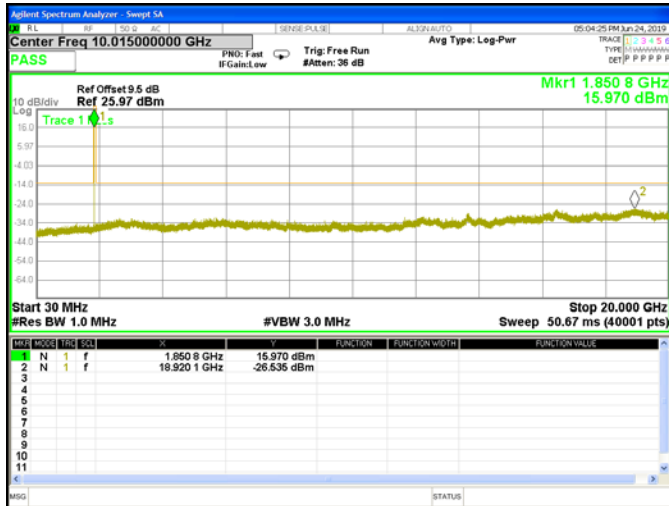

## Middle Channel

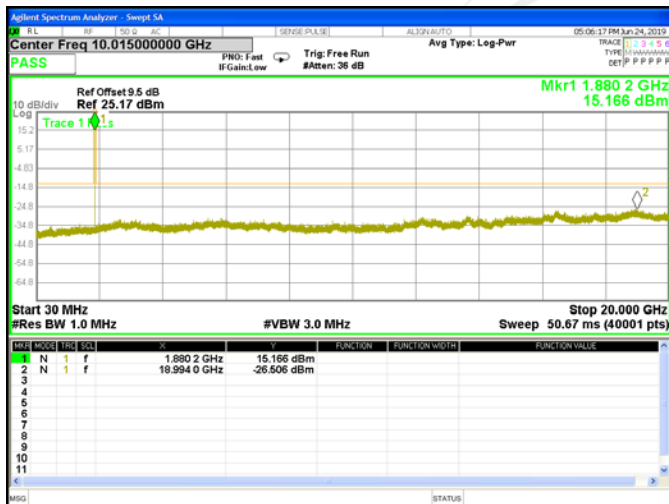


## Highest Channel

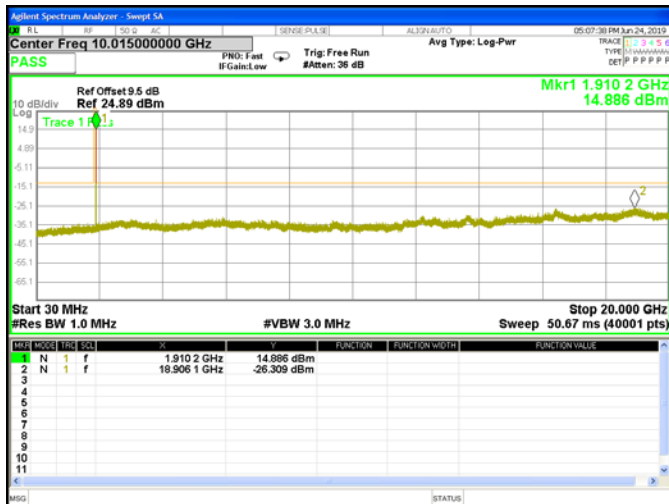


## GPRS1900 BAND(30M-20G)


## Lowest Channel

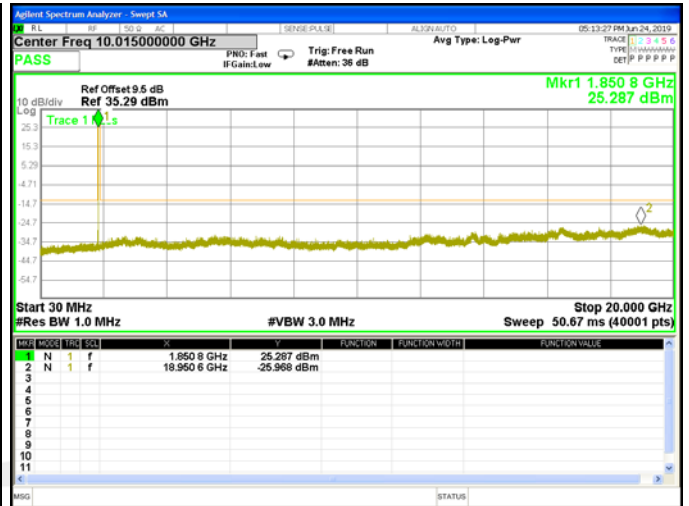

## Middle Channel

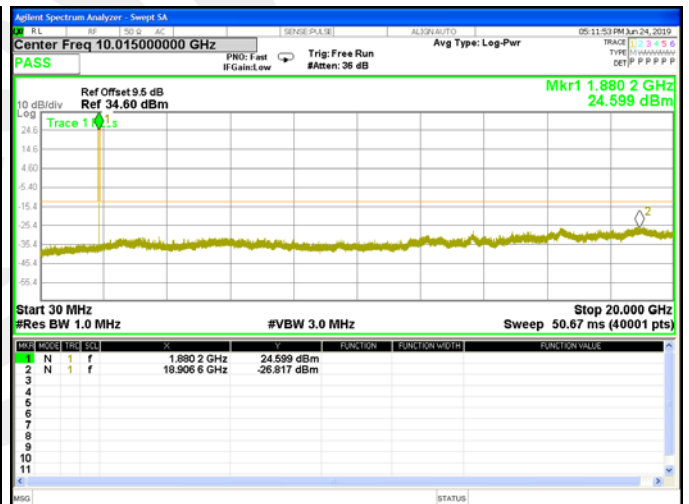


## Highest Channel

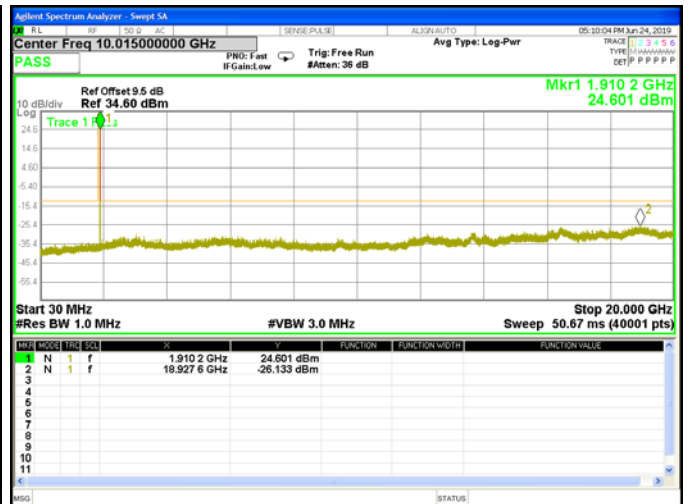




## EDGE 1900 BAND(30M-20G)


## Lowest Channel

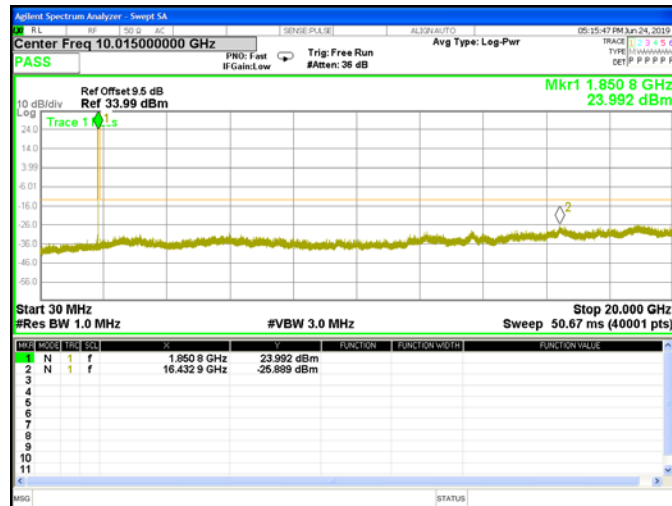

## Middle Channel

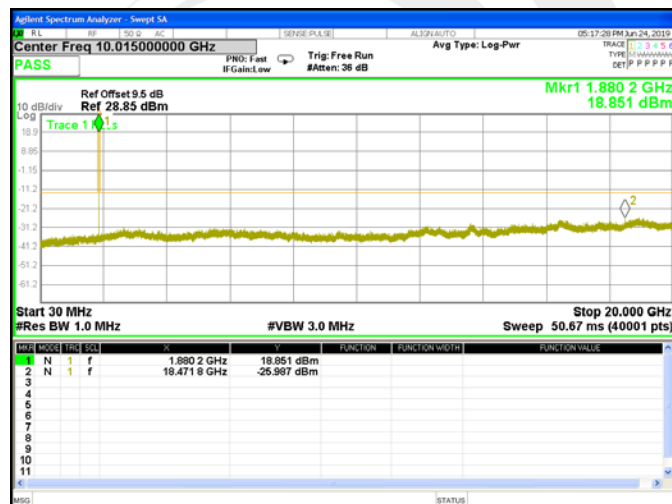


## Highest Channel

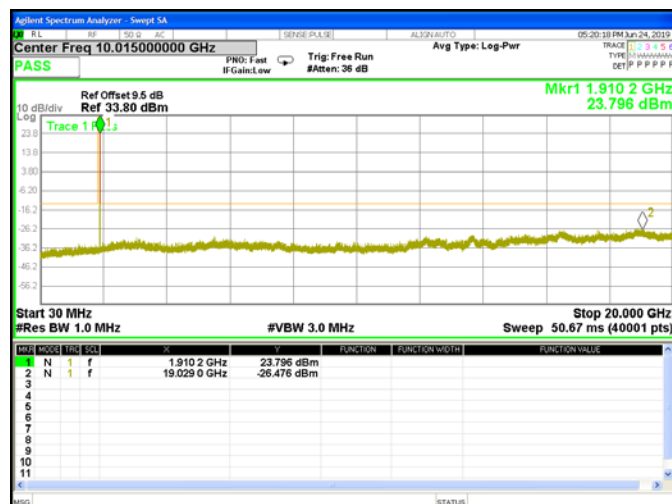




## WCDMA Band V (RMC 12.2Kbps)


## Lowest Channel

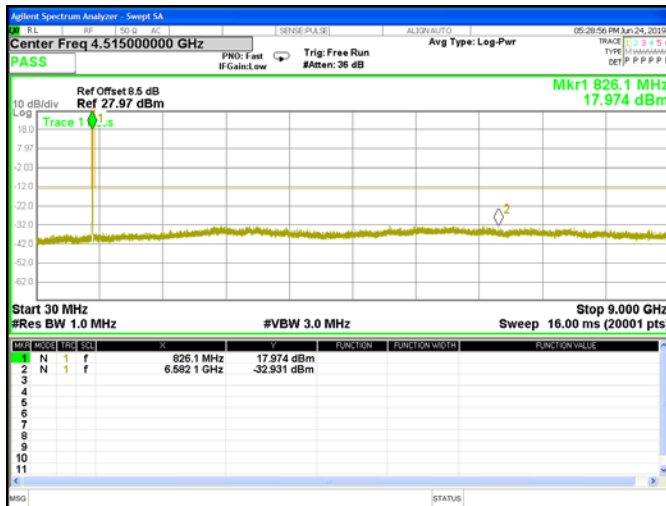

## Middle Channel

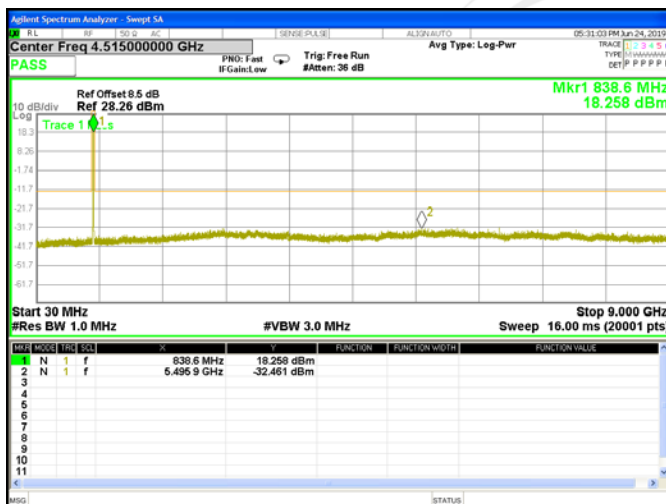


## Highest Channel

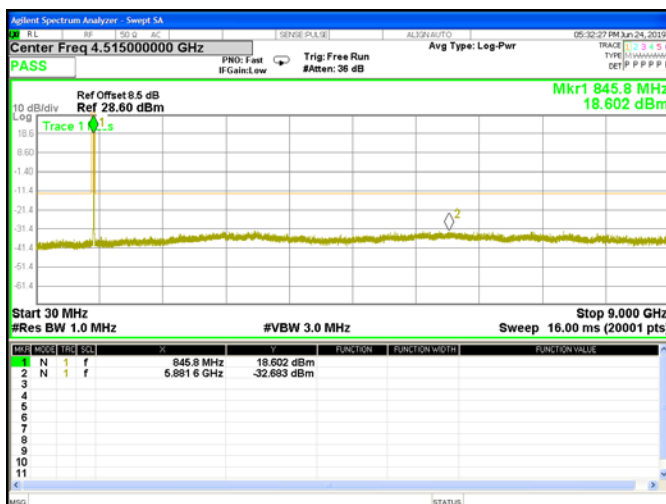


## WCDMA Band II (RMC 12.2Kbps)(30M-20G)


## Lowest Channel

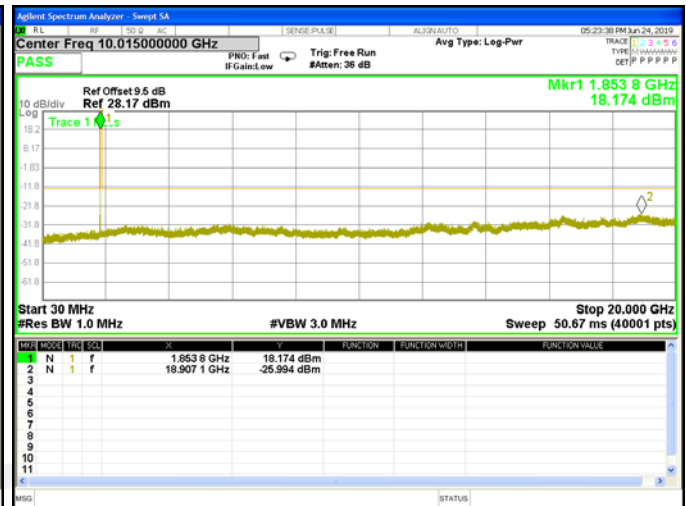

## Middle Channel

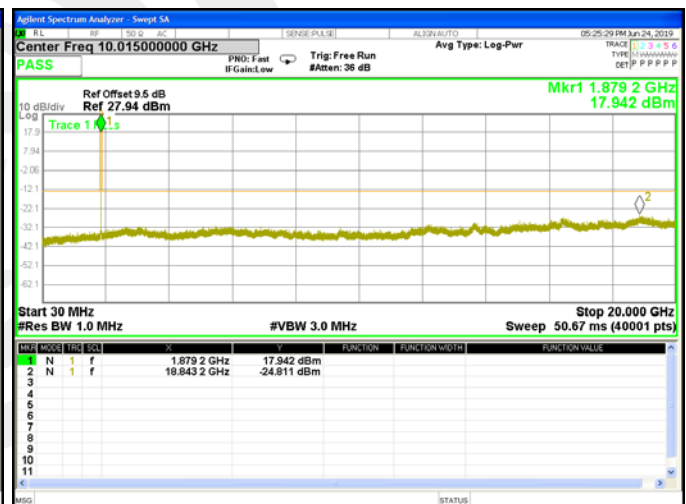

## Highest Channel

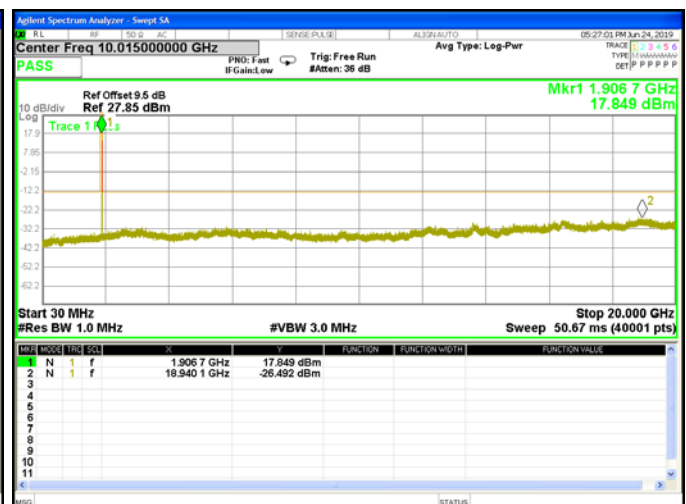







## A7. BAND EDGE

GSM 850

GPRS 850



Lowest Band Edge

Lowest Band Edge

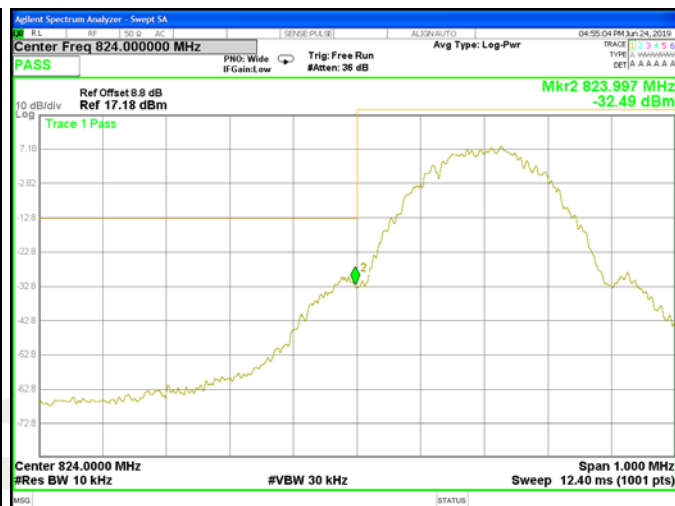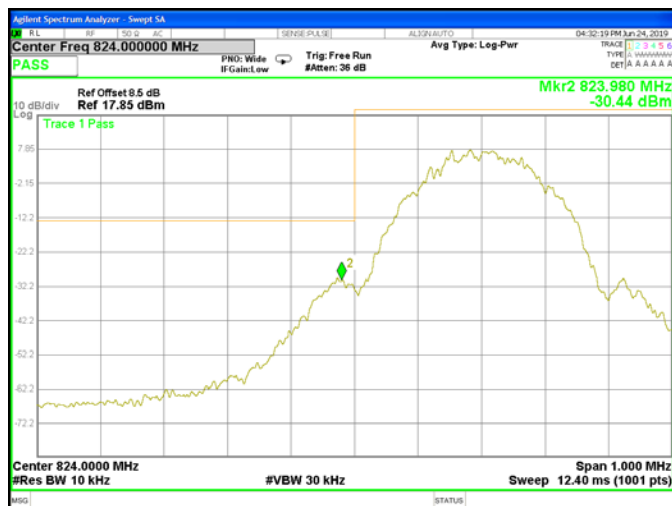

Highest Band Edge


Highest Band Edge

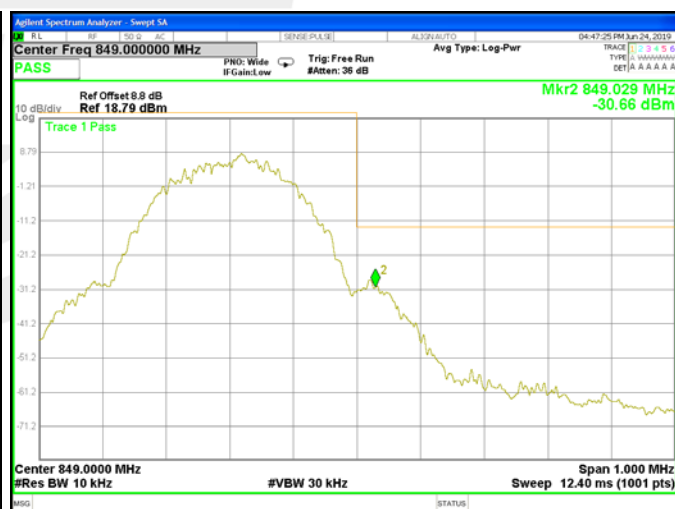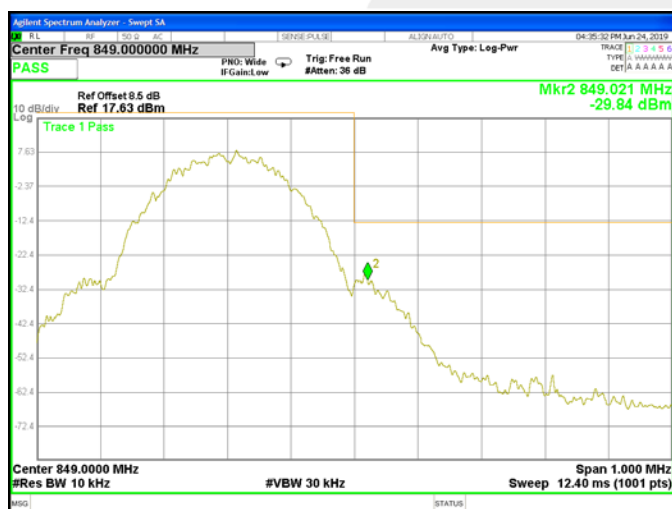



## EDGE 850

## Lowest Band Edge

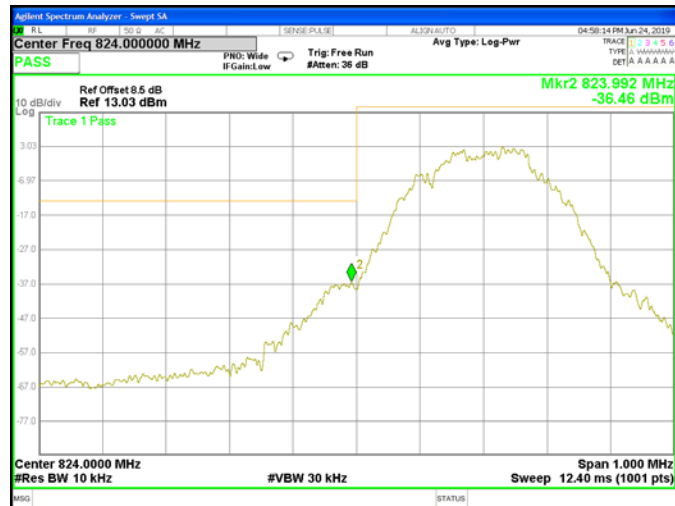

## Highest Band Edge









GSM 1900

GPRS 1900



Lowest Band Edge

Lowest Band Edge

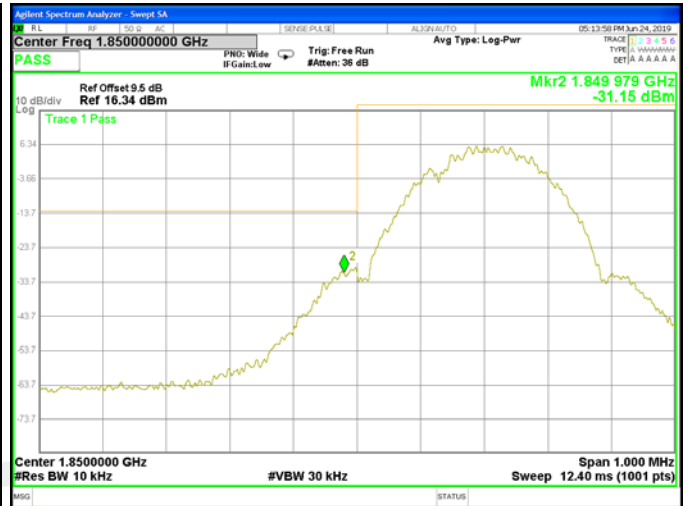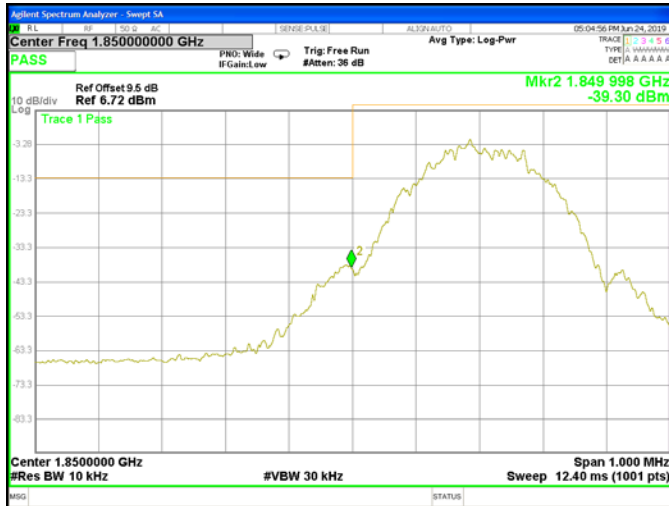

Highest Band Edge

Highest Band Edge

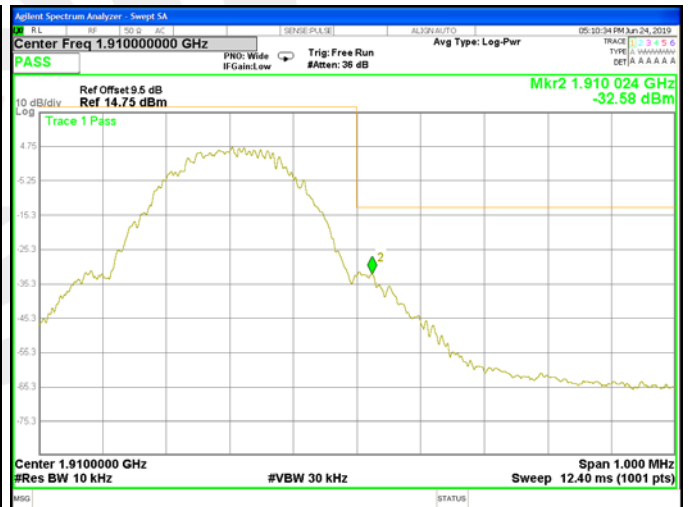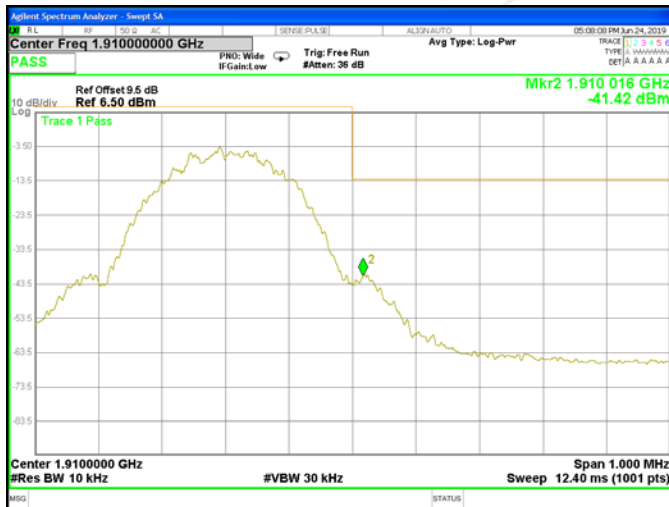




## EDGE 1900

## Lowest Band Edge



## Highest Band Edge

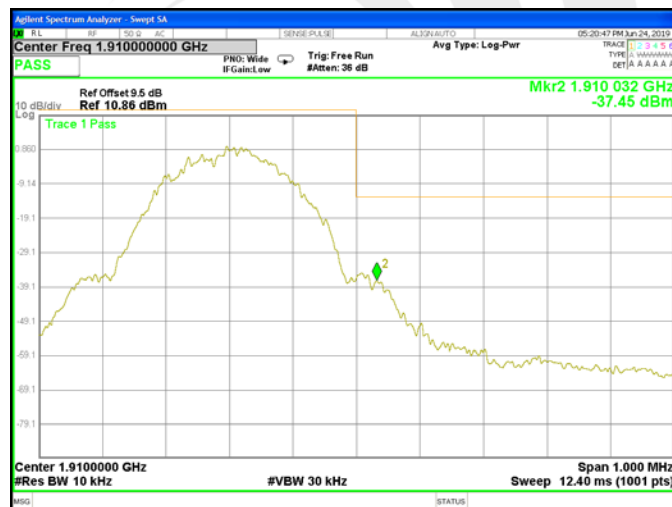



## WCDMA Band VRMC 12.2Kbps

## Lowest Band Edge



## WCDMA Band IIRMC 12.2Kbps

## Lowest Band Edge



## Highest Band Edge



## Highest Band Edge





# A8. FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT

GSM 850: (30-9000)MHz

GSM 850: (30-9000)MHz							
The Worst Test Results Channel 128/824.2 MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dB)	Polarity
1648.14	-41.02	9.40	4.75	-36.37	-13.00	-23.37	H
2472.58	-40.11	10.60	8.39	-37.90	-13.00	-24.90	H
3296.81	-31.10	12.00	11.79	-30.89	-13.00	-17.89	H
1648.45	-43.58	9.40	4.75	-38.93	-13.00	-25.93	V
2472.25	-44.78	10.60	8.39	-42.57	-13.00	-29.57	V
3296.53	-43.78	12.00	11.79	-43.57	-13.00	-30.57	V
The Worst Test Results Channel 190/836.6 MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dB)	Polarity
1673.18	-41.01	9.50	4.76	-36.27	-13.00	-23.27	H
2509.55	-40.63	10.70	8.40	-38.33	-13.00	-25.33	H
3346.35	-31.38	12.20	11.80	-30.98	-13.00	-17.98	H
1672.90	-43.97	9.40	4.75	-39.32	-13.00	-26.32	V
2509.51	-45.23	10.60	8.39	-43.02	-13.00	-30.02	V
3346.32	-43.88	12.20	11.82	-43.50	-13.00	-30.50	V
The Worst Test Results Channel 251/848.8 MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dB)	Polarity
1697.48	-40.70	9.60	4.77	-35.87	-13.00	-22.87	H
2546.10	-39.47	10.80	8.50	-37.17	-13.00	-24.17	H
3394.84	-30.85	12.50	11.90	-30.25	-13.00	-17.25	H
1697.28	-43.60	9.60	4.77	-38.77	-13.00	-25.77	V
2546.10	-44.43	10.80	8.50	-42.13	-13.00	-29.13	V
3395.07	-43.45	12.50	11.90	-42.85	-13.00	-29.85	V

**Note:** (1) Below 30MHz no Spurious found is the worst condition.

(2) Above 3.5GHz amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value

(3)Test is divided into three directions, X/Y/Z. X pattern for the worst.



GPRS 850: (30-9000)MHz

GPRS 850: (30-9000)MHz							
The Worst Test Results Channel 128/824.2 MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dB)	Polarity
1648.46	-40.76	9.40	4.75	-36.11	-13.00	-23.11	H
2472.35	-39.42	10.60	8.39	-37.21	-13.00	-24.21	H
3296.81	-31.73	12.00	11.79	-31.52	-13.00	-18.52	H
1648.08	-44.33	9.40	4.75	-39.68	-13.00	-26.68	V
2472.34	-45.00	10.60	8.39	-42.79	-13.00	-29.79	V
3296.57	-43.26	12.00	11.79	-43.05	-13.00	-30.05	V
The Worst Test Results Channel 190/836.6 MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dB)	Polarity
1673.28	-41.28	9.50	4.76	-36.54	-13.00	-23.54	H
2509.65	-40.30	10.70	8.40	-38.00	-13.00	-25.00	H
3346.06	-31.14	12.20	11.80	-30.74	-13.00	-17.74	H
1673.08	-44.22	9.40	4.75	-39.57	-13.00	-26.57	V
2509.57	-45.31	10.60	8.39	-43.10	-13.00	-30.10	V
3346.33	-42.86	12.20	11.82	-42.48	-13.00	-29.48	V
The Worst Test Results Channel 251/848.8 MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dB)	Polarity
1697.67	-41.15	9.60	4.77	-36.32	-13.00	-23.32	H
2546.35	-39.34	10.80	8.50	-37.04	-13.00	-24.04	H
3395.25	-32.21	12.50	11.90	-31.61	-13.00	-18.61	H
1697.36	-43.53	9.60	4.77	-38.70	-13.00	-25.70	V
2546.53	-45.38	10.80	8.50	-43.08	-13.00	-30.08	V
3395.13	-43.13	12.50	11.90	-42.53	-13.00	-29.53	V

**Note:** (1) Below 30MHz no Spurious found is the worst condition.

(2) Above 3.5GHz amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value

(3)Test is divided into three directions, X/Y/Z. X pattern for the worst.



EDGE 850: (30-9000)MHz

EGPRS 850: (30-9000)MHz							
The Worst Test Results Channel 128/824.2 MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dB)	Polarity
1648.21	-41.51	9.40	4.75	-36.86	-13.00	-23.86	H
2472.64	-39.55	10.60	8.39	-37.34	-13.00	-24.34	H
3296.76	-31.27	12.00	11.79	-31.06	-13.00	-18.06	H
1648.30	-44.43	9.40	4.75	-39.78	-13.00	-26.78	V
2472.53	-45.32	10.60	8.39	-43.11	-13.00	-30.11	V
3296.57	-43.57	12.00	11.79	-43.36	-13.00	-30.36	V
The Worst Test Results Channel 190/836.6 MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dB)	Polarity
1673.08	-41.55	9.50	4.76	-36.81	-13.00	-23.81	H
2509.56	-40.63	10.70	8.40	-38.33	-13.00	-25.33	H
3345.95	-31.16	12.20	11.80	-30.76	-13.00	-17.76	H
1673.11	-44.39	9.40	4.75	-39.74	-13.00	-26.74	V
2509.86	-45.44	10.60	8.39	-43.23	-13.00	-30.23	V
3346.20	-42.75	12.20	11.82	-42.37	-13.00	-29.37	V
The Worst Test Results Channel 251/848.8 MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dB)	Polarity
1697.58	-40.31	9.60	4.77	-35.48	-13.00	-22.48	H
2546.08	-39.74	10.80	8.50	-37.44	-13.00	-24.44	H
3394.99	-31.89	12.50	11.90	-31.29	-13.00	-18.29	H
1697.65	-44.03	9.60	4.77	-39.20	-13.00	-26.20	V
2546.33	-44.05	10.80	8.50	-41.75	-13.00	-28.75	V
3394.88	-42.89	12.50	11.90	-42.29	-13.00	-29.29	V

**Note:** (1) Below 30MHz no Spurious found is the worst condition.

(2) Above 3.5GHz amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value

(3) Test is divided into three directions, X/Y/Z. X pattern for the worst.



PCS 1900: (30-20000)MHz

DCS 1900: (30-20000)MHz							
The Worst Test Results for Channel 512/1850.2MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dB)	Polarity
3700.47	-34.70	12.60	12.93	-35.03	-13.00	-22.03	H
5550.56	-34.42	13.10	17.11	-38.43	-13.00	-25.43	H
7400.82	-32.80	11.50	22.20	-43.50	-13.00	-30.50	H
3700.51	-35.95	12.60	12.93	-36.28	-13.00	-23.28	V
5550.27	-33.94	13.10	17.11	-37.95	-13.00	-24.95	V
7400.85	-32.76	11.50	22.20	-43.46	-13.00	-30.46	V
The Worst Test Results for Channel 661/1880.0MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dB)	Polarity
3760.15	-33.45	12.60	12.93	-33.78	-13.00	-20.78	H
5640.05	-34.18	13.10	17.11	-38.19	-13.00	-25.19	H
7520.09	-32.89	11.50	22.20	-43.59	-13.00	-30.59	H
3759.87	-35.95	12.60	12.93	-36.28	-13.00	-23.28	V
5640.18	-34.73	13.10	17.11	-38.74	-13.00	-25.74	V
7519.88	-32.48	11.50	22.20	-43.18	-13.00	-30.18	V
The Worst Test Results for Channel 810/1909.8MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dB)	Polarity
3819.73	-34.87	12.60	12.93	-35.20	-13.00	-22.20	H
5729.23	-34.43	13.10	17.11	-38.44	-13.00	-25.44	H
7638.86	-33.48	11.50	22.20	-44.18	-13.00	-31.18	H
3819.71	-35.39	12.60	12.93	-35.72	-13.00	-22.72	V
5729.22	-34.99	13.10	17.11	-39.00	-13.00	-26.00	V
7639.22	-32.90	11.50	22.20	-43.60	-13.00	-30.60	V

**Note:** (1) Below 30MHz no Spurious found is the worst condition.

(2) Above 8GHz amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value

(3) Test is divided into three directions, X/Y/Z. X pattern for the worst.





GPRS 1900: (30-20000)MHz

GPRS1900: (30-20000)MHz							
The Worst Test Results for Channel 512/1850.2MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dB)	Polarity
3700.49	-33.99	12.60	12.93	-34.32	-13.00	-21.32	H
5550.50	-34.60	13.10	17.11	-38.61	-13.00	-25.61	H
7400.49	-33.17	11.50	22.20	-43.87	-13.00	-30.87	H
3700.51	-34.90	12.60	12.93	-35.23	-13.00	-22.23	V
5550.51	-34.43	13.10	17.11	-38.44	-13.00	-25.44	V
7400.56	-32.72	11.50	22.20	-43.42	-13.00	-30.42	V
The Worst Test Results for Channel 661/1880.0MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dB)	Polarity
3759.80	-34.91	12.60	12.93	-35.24	-13.00	-22.24	H
5640.20	-34.43	13.10	17.11	-38.44	-13.00	-25.44	H
7520.18	-32.54	11.50	22.20	-43.24	-13.00	-30.24	H
3760.26	-35.41	12.60	12.93	-35.74	-13.00	-22.74	V
5640.23	-34.86	13.10	17.11	-38.87	-13.00	-25.87	V
7520.22	-32.76	11.50	22.20	-43.46	-13.00	-30.46	V
The Worst Test Results for Channel 810/1909.8MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dB)	Polarity
3819.29	-33.48	12.60	12.93	-33.81	-13.00	-20.81	H
5729.10	-35.28	13.10	17.11	-39.29	-13.00	-26.29	H
7638.88	-32.58	11.50	22.20	-43.28	-13.00	-30.28	H
3819.57	-35.10	12.60	12.93	-35.43	-13.00	-22.43	V
5729.36	-34.07	13.10	17.11	-38.08	-13.00	-25.08	V
7639.07	-31.88	11.50	22.20	-42.58	-13.00	-29.58	V

**Note:** (1) Below 30MHz no Spurious found is the worst condition.

(2) Above 8GHz amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value

(3) Test is divided into three directions, X/Y/Z. X pattern for the worst.





EDGE 1900: (30-20000)MHz

EGPRS 1900: (30-20000)MHz							
The Worst Test Results for Channel 512/1850.2MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dB)	Polarity
3700.40	-34.93	12.60	12.93	-35.26	-13.00	-22.26	H
5550.54	-34.86	13.10	17.11	-38.87	-13.00	-25.87	H
7400.61	-33.19	11.50	22.20	-43.89	-13.00	-30.89	H
3700.51	-35.43	12.60	12.93	-35.76	-13.00	-22.76	V
5550.51	-34.66	13.10	17.11	-38.67	-13.00	-25.67	V
7400.90	-32.33	11.50	22.20	-43.03	-13.00	-30.03	V
The Worst Test Results for Channel 661/1880.0MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dB)	Polarity
3759.78	-34.56	12.60	12.93	-34.89	-13.00	-21.89	H
5639.96	-34.37	13.10	17.11	-38.38	-13.00	-25.38	H
7519.81	-33.53	11.50	22.20	-44.23	-13.00	-31.23	H
3760.25	-35.92	12.60	12.93	-36.25	-13.00	-23.25	V
5639.94	-34.94	13.10	17.11	-38.95	-13.00	-25.95	V
7519.84	-32.16	11.50	22.20	-42.86	-13.00	-29.86	V
The Worst Test Results for Channel 810/1909.8MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dB)	Polarity
3819.33	-34.11	12.60	12.93	-34.44	-13.00	-21.44	H
5729.06	-34.46	13.10	17.11	-38.47	-13.00	-25.47	H
7639.12	-33.63	11.50	22.20	-44.33	-13.00	-31.33	H
3819.51	-35.62	12.60	12.93	-35.95	-13.00	-22.95	V
5729.22	-35.11	13.10	17.11	-39.12	-13.00	-26.12	V
7639.05	-32.53	11.50	22.20	-43.23	-13.00	-30.23	V

**Note:** (1) Below 30MHz no Spurious found is the worst condition.

(2) Above 8GHz amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has.

(3) Test is divided into three directions, X/Y/Z. X pattern for the worst.



UMTS band V(30-9000)MHz

WCDMA Band V: (30-9000)MHz							
The worst testresults channel 4132/826.4MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dB)	Polarity
1652.48	-40.84	9.40	4.75	-36.19	-13.00	-23.19	H
2479.57	-40.28	10.60	8.39	-38.07	-13.00	-25.07	H
3305.47	-31.91	12.00	11.79	-31.70	-13.00	-18.70	H
1652.49	-43.68	9.40	4.75	-39.03	-13.00	-26.03	V
2479.51	-44.24	10.60	8.39	-42.03	-13.00	-29.03	V
3305.64	-42.57	12.00	11.79	-42.36	-13.00	-29.36	V
The Worst Test Results Channel 4183/836.6MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dB)	Polarity
1672.82	-40.57	9.50	4.76	-35.83	-13.00	-22.83	H
2509.55	-39.81	10.70	8.40	-37.51	-13.00	-24.51	H
3345.95	-31.36	12.20	11.80	-30.96	-13.00	-17.96	H
1672.86	-43.38	9.40	4.75	-38.73	-13.00	-25.73	V
2509.71	-44.28	10.60	8.39	-42.07	-13.00	-29.07	V
3346.35	-43.81	12.20	11.82	-43.43	-13.00	-30.43	V
The Worst Test Results Channel 4233/846.6MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dB)	Polarity
1693.39	-41.20	9.60	4.77	-36.37	-13.00	-23.37	H
2539.08	-39.61	10.80	8.50	-37.31	-13.00	-24.31	H
3385.96	-32.32	12.50	11.90	-31.72	-13.00	-18.72	H
1693.44	-44.45	9.60	4.77	-39.62	-13.00	-26.62	V
2539.26	-44.81	10.80	8.50	-42.51	-13.00	-29.51	V
3385.90	-43.03	12.50	11.90	-42.43	-13.00	-29.43	V

**Note:** (1) Below 30MHz no Spurious found is the worst condition.

(2) Above 3GHz amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value

(3)Test is divided into three directions, X/Y/Z. X pattern for the worst.



UMTS band II(30-20000)MHz

WCDMA Band II: (30-20000)MHz							
The Worst Test Results for Channel 9262/1852.4MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dB)	Polarity
3704.35	-34.38	12.60	12.93	-34.71	-13.00	-21.71	H
5557.33	-34.06	13.10	17.11	-38.07	-13.00	-25.07	H
7409.73	-32.54	11.50	22.20	-43.24	-13.00	-30.24	H
3704.48	-34.87	12.60	12.93	-35.20	-13.00	-22.20	V
5557.44	-35.17	13.10	17.11	-39.18	-13.00	-26.18	V
7409.54	-32.13	11.50	22.20	-42.83	-13.00	-29.83	V
The Worst Test Results for Channel 9400/1880MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dB)	Polarity
3760.01	-34.87	12.60	12.93	-35.20	-13.00	-22.20	H
5640.18	-34.93	13.10	17.11	-38.94	-13.00	-25.94	H
7520.01	-33.28	11.50	22.20	-43.98	-13.00	-30.98	H
3760.07	-35.43	12.60	12.93	-35.76	-13.00	-22.76	V
5639.97	-34.44	13.10	17.11	-38.45	-13.00	-25.45	V
7519.89	-32.80	11.50	22.20	-43.50	-13.00	-30.50	V
The Worst Test Results for Channel 9538/1907.6MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dB)	Polarity
3815.47	-34.66	12.60	12.93	-34.99	-13.00	-21.99	H
5722.17	-35.06	13.10	17.11	-39.07	-13.00	-26.07	H
7630.08	-32.89	11.50	22.20	-43.59	-13.00	-30.59	H
3815.45	-35.02	12.60	12.93	-35.35	-13.00	-22.35	V
5722.35	-33.78	13.10	17.11	-37.79	-13.00	-24.79	V
7630.20	-33.14	11.50	22.20	-43.84	-13.00	-30.84	V

**Note:** (1) Below 30MHz no Spurious found is the worst condition.

(2) Above 6GHz amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value

(3)Test is divided into three directions, X/Y/Z. X pattern for the worst.



## APPENDIX B PHOTOS OF TEST SETUP

Note: See test photos in setup photo document for the actual connections between Product and support equipment.

※ ※ ※ ※ ※ END OF THE REPORT ※ ※ ※ ※ ※

