



Appendix A

RF Test Data for BT LE (Conducted Measurement)

Product Name: BluePad-50 Plus MSR

Test Model: BluePad-50 Plus MSR

Environmental Conditions

Temperature:	23.8° C
Relative Humidity:	52.1%
ATM Pressure:	100.0 kPa
Test Engineer:	Taylor Hu
Supervised by:	Ling Zhu





A.1 -6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 1M	2402	Ant1	0.658	0.5	Pass
NVNT	BLE 1M	2440	Ant1	0.710	0.5	Pass
NVNT	BLE 1M	2480	Ant1	0.654	0.5	Pass
NVNT	BLE 2M	2402	Ant1	1.145	0.5	Pass
NVNT	BLE 2M	2440	Ant1	1.166	0.5	Pass
NVNT	BLE 2M	2480	Ant1	1.151	0.5	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity





Test Graphs

-6dB Bandwidth NVNT BLE 1M 2402MHz Ant1

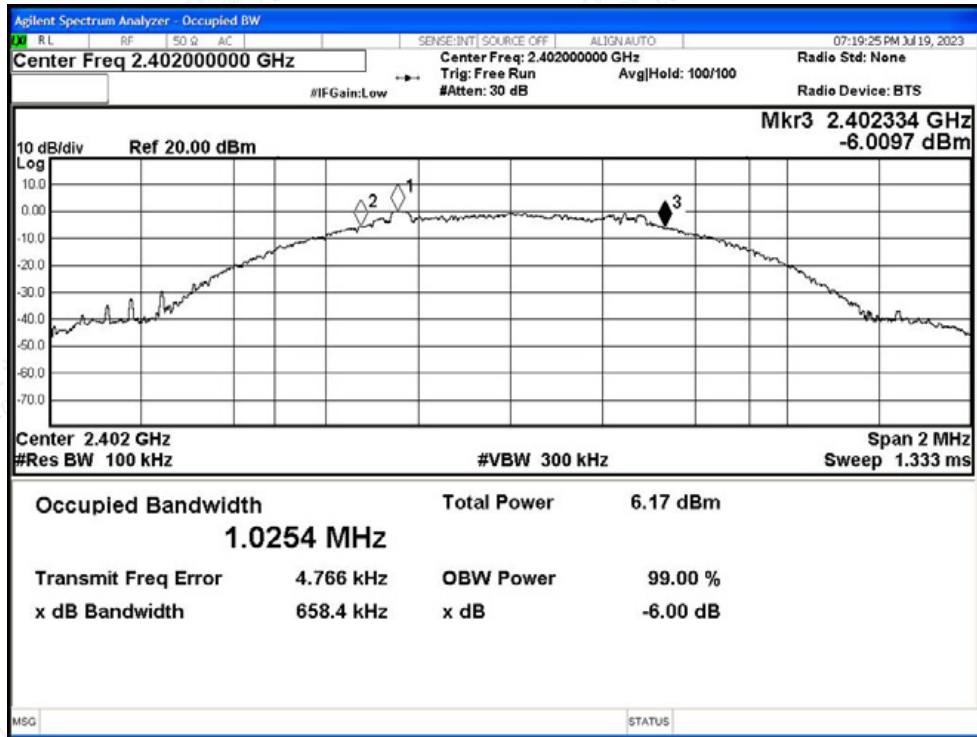

-6dB Bandwidth NVNT BLE 1M 2440MHz Ant1

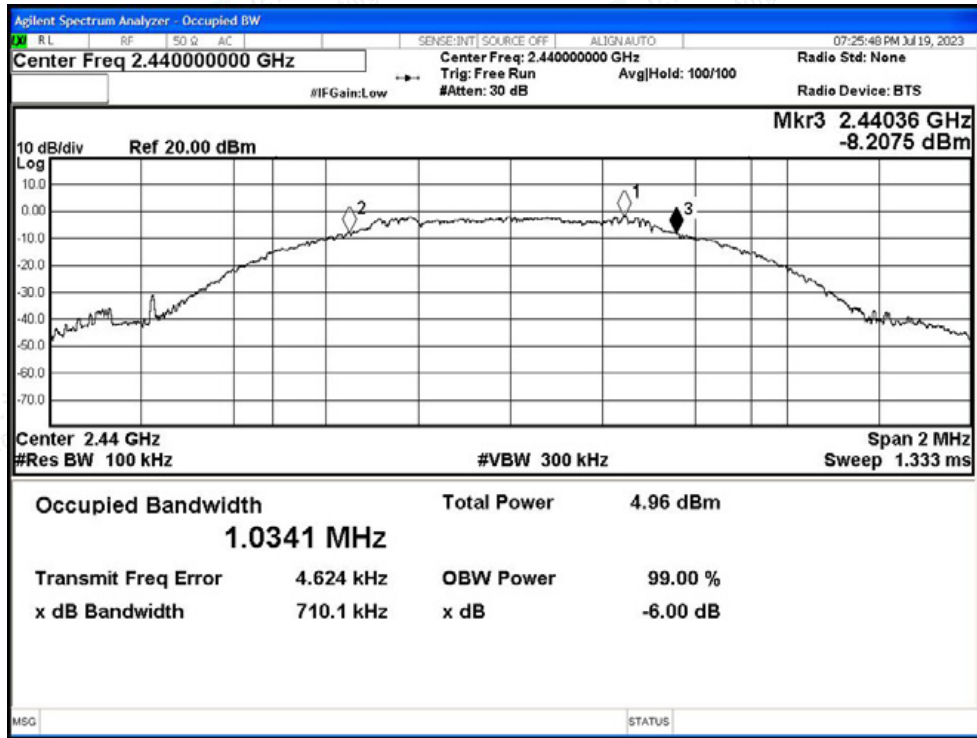


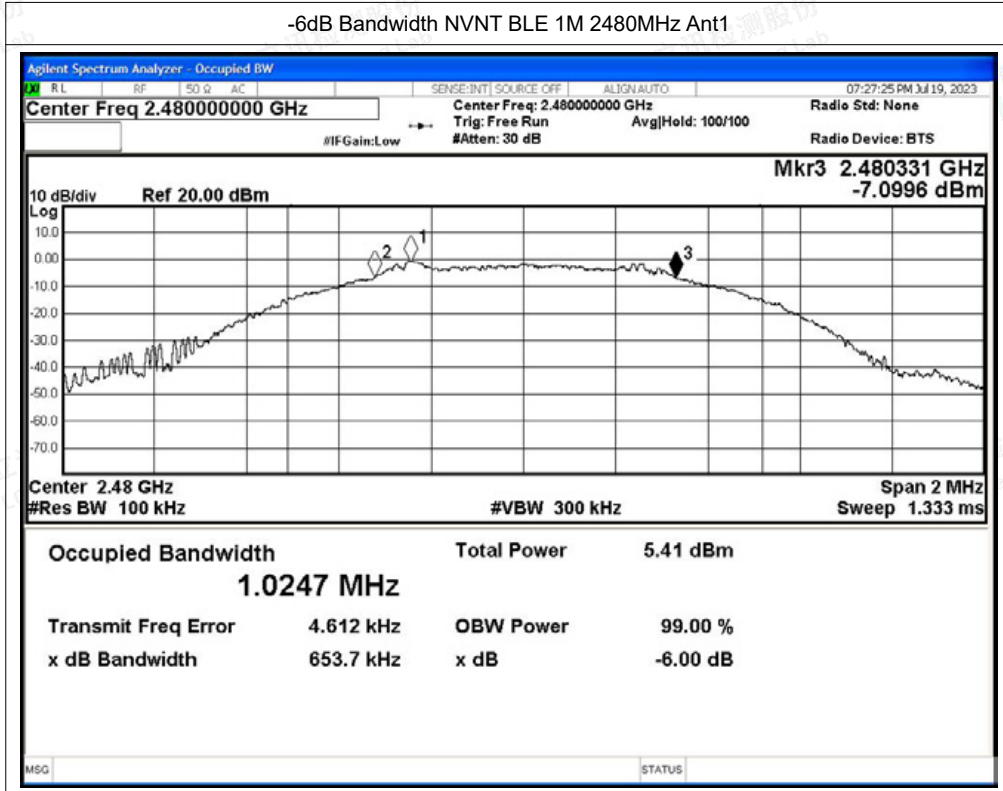




Test Graphs

-6dB Bandwidth NVNT BLE 2M 2402MHz Ant1

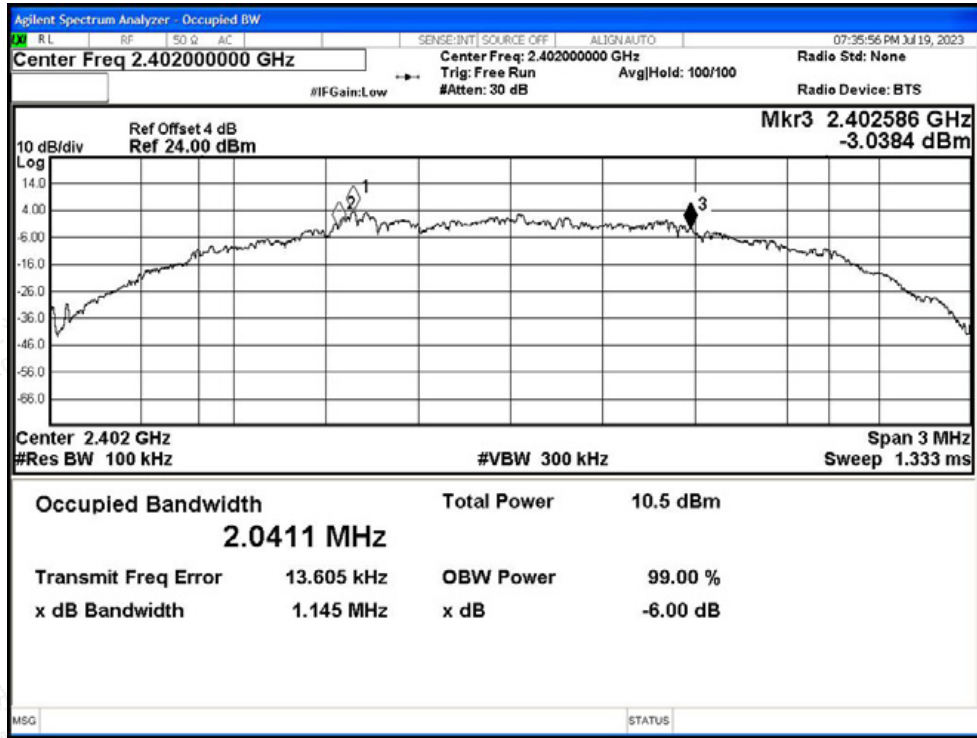


-6dB Bandwidth NVNT BLE 2M 2440MHz Ant1

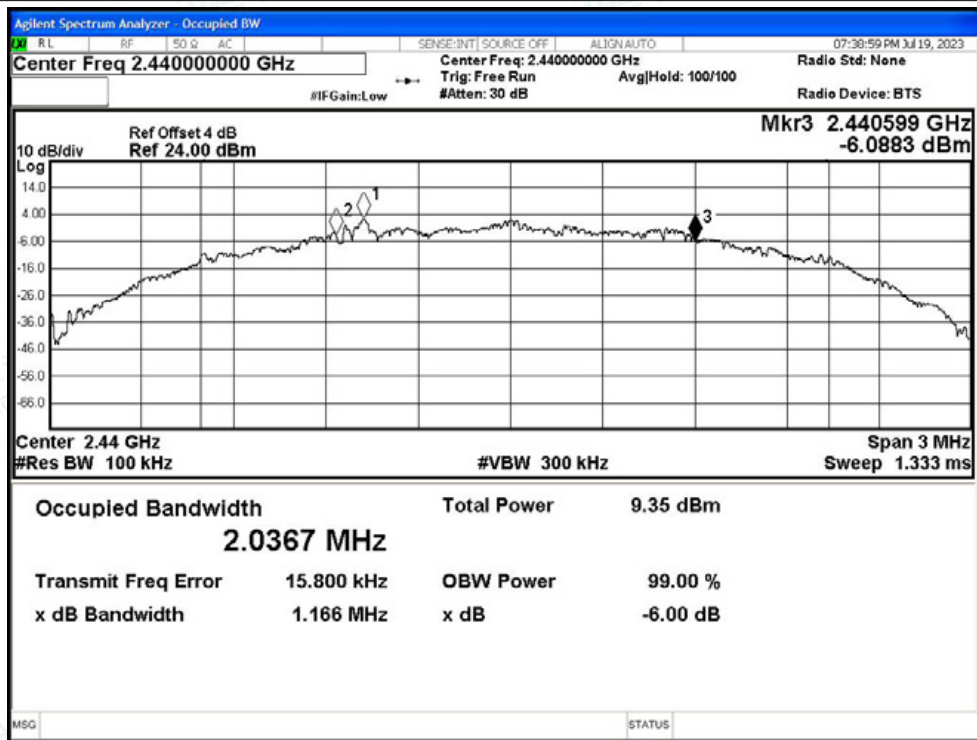



-6dB Bandwidth NVNT BLE 2M 2480MHz Ant1

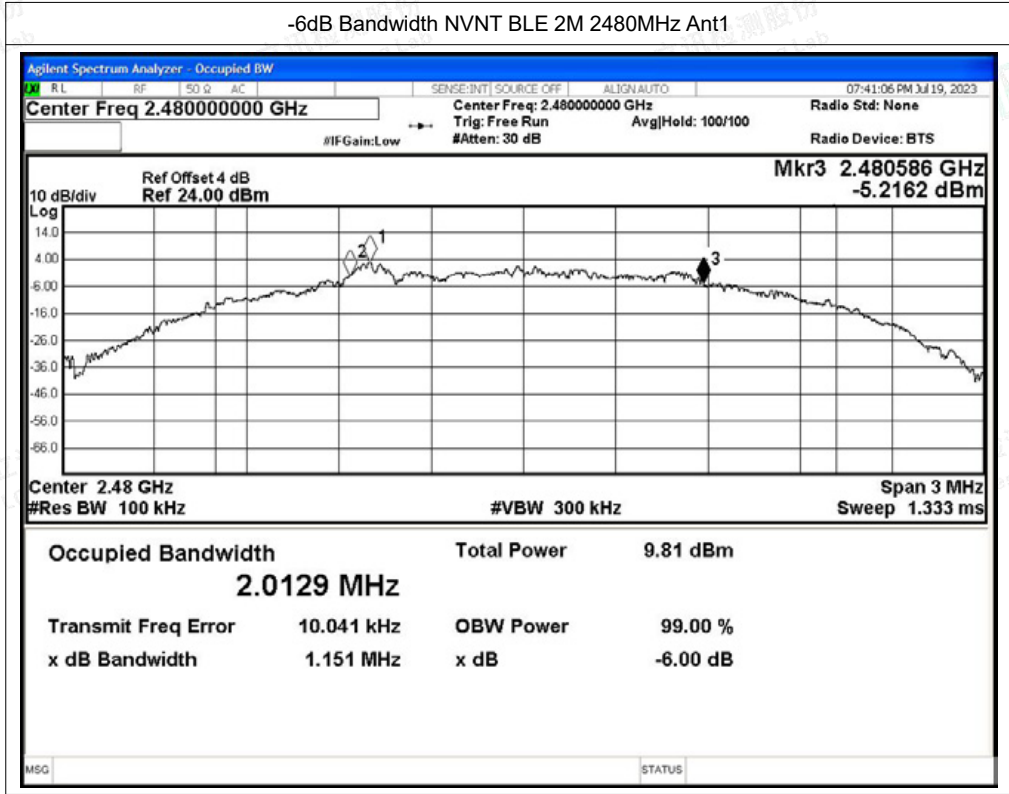



A.2 Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	5.64	30	Pass
NVNT	BLE 1M	2440	Ant1	4.44	30	Pass
NVNT	BLE 1M	2480	Ant1	4.66	30	Pass
NVNT	BLE 2M	2402	Ant1	4.37	30	Pass
NVNT	BLE 2M	2440	Ant1	4.22	30	Pass
NVNT	BLE 2M	2480	Ant1	4.43	30	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity





Test Graphs

Power NVNT BLE 1M 2402MHz Ant1

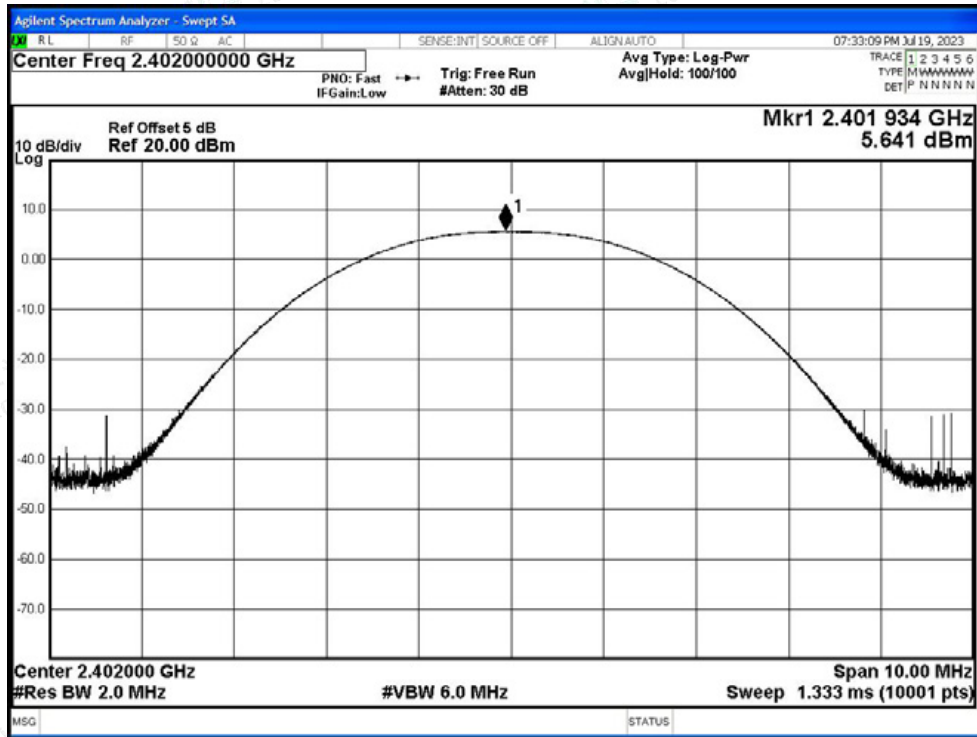

Power NVNT BLE 1M 2440MHz Ant1

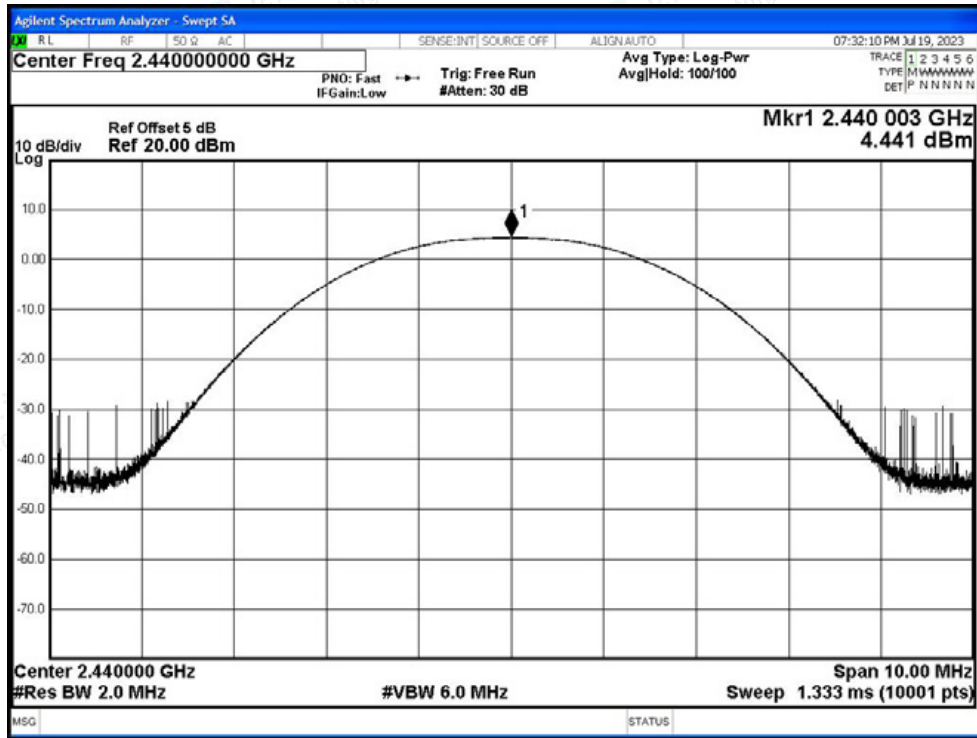


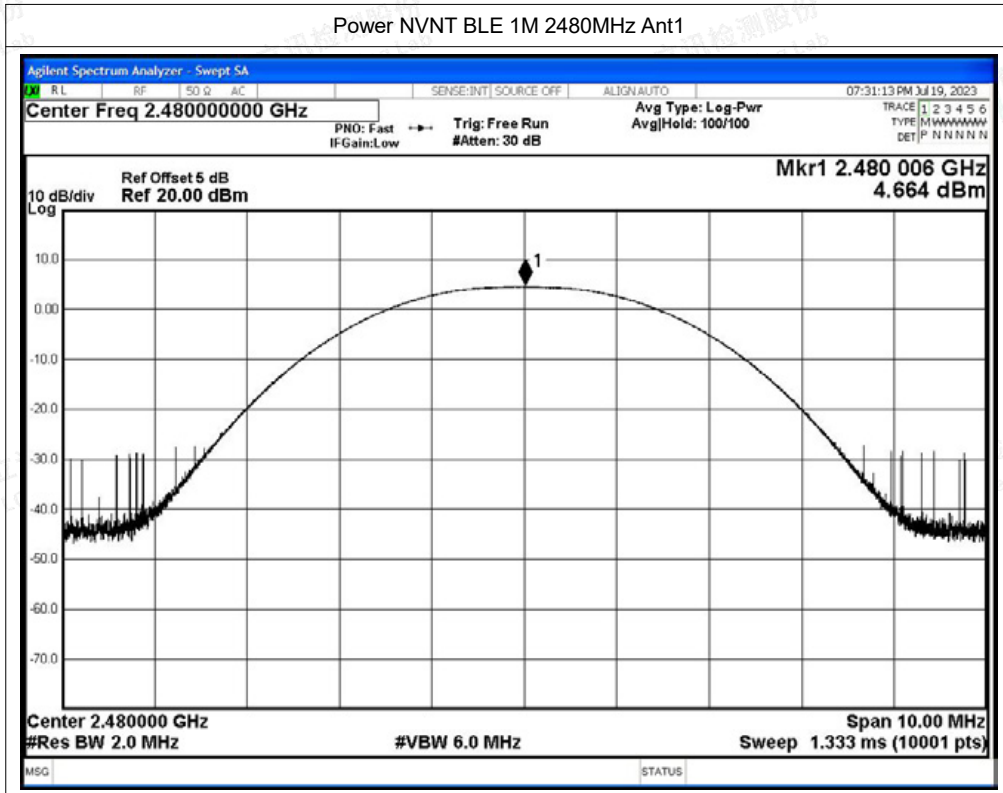





Test Graphs

Power NVNT BLE 2M 2402MHz Ant1

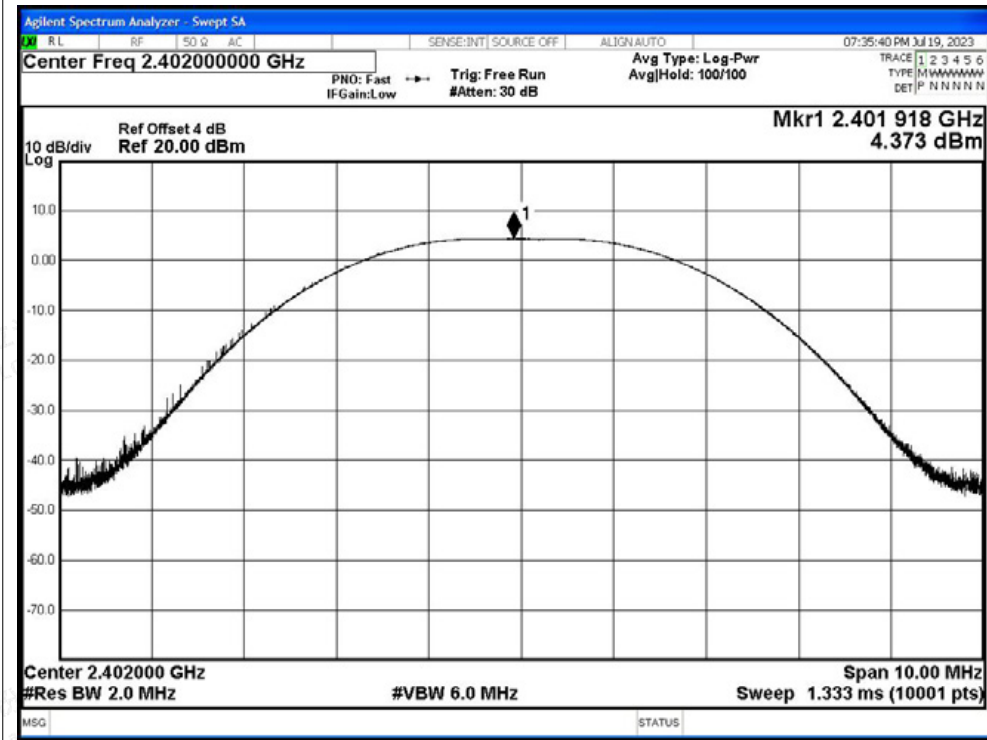

Power NVNT BLE 2M 2440MHz Ant1

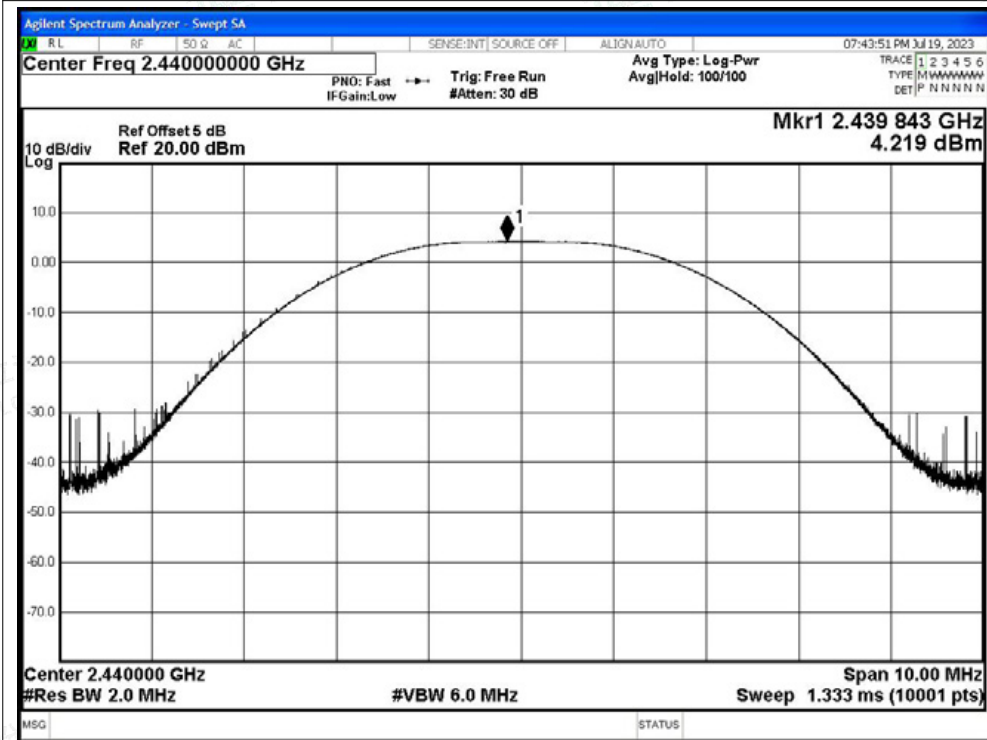

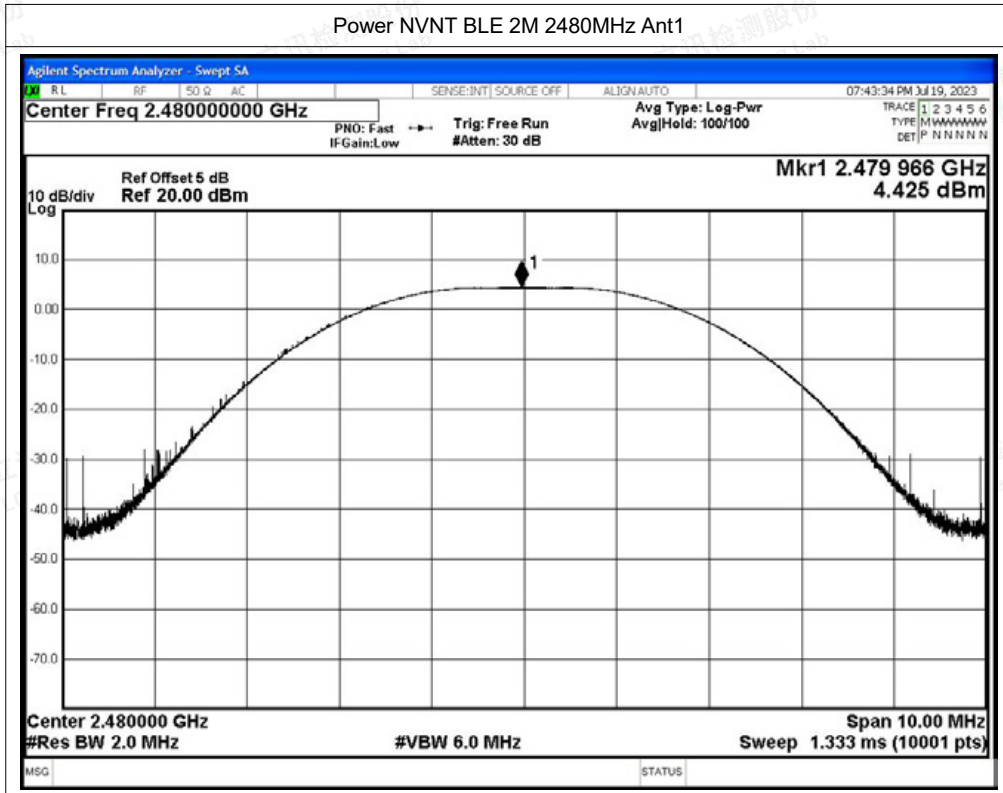



A.3 Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	BLE 1M	2402	Ant1	-10.88	8	Pass
NVNT	BLE 1M	2440	Ant1	-12.07	8	Pass
NVNT	BLE 1M	2480	Ant1	-11.73	8	Pass
NVNT	BLE 2M	2402	Ant1	-15.24	8	Pass
NVNT	BLE 2M	2440	Ant1	-16.45	8	Pass
NVNT	BLE 2M	2480	Ant1	-16.48	8	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity





Test Graphs

PSD NVNT BLE 1M 2402MHz Ant1

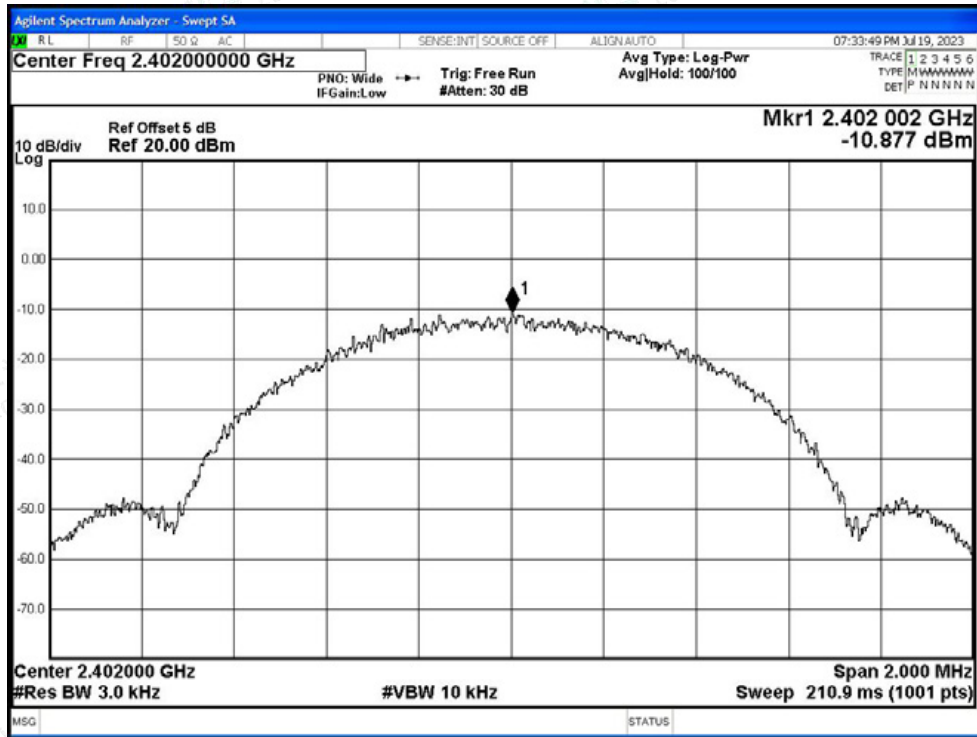

PSD NVNT BLE 1M 2440MHz Ant1

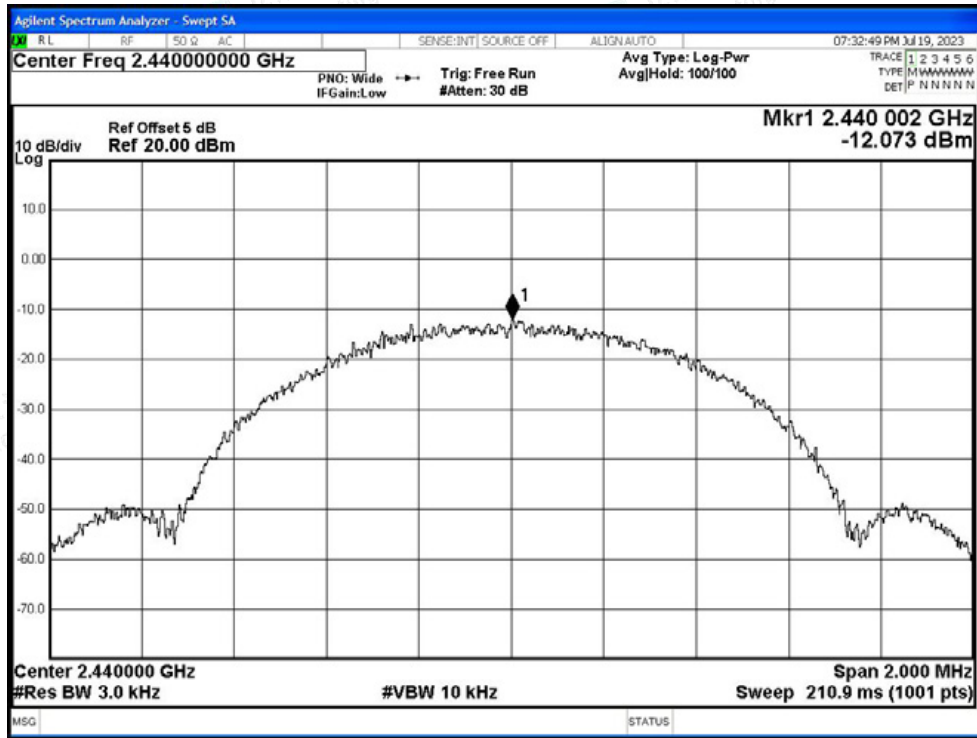


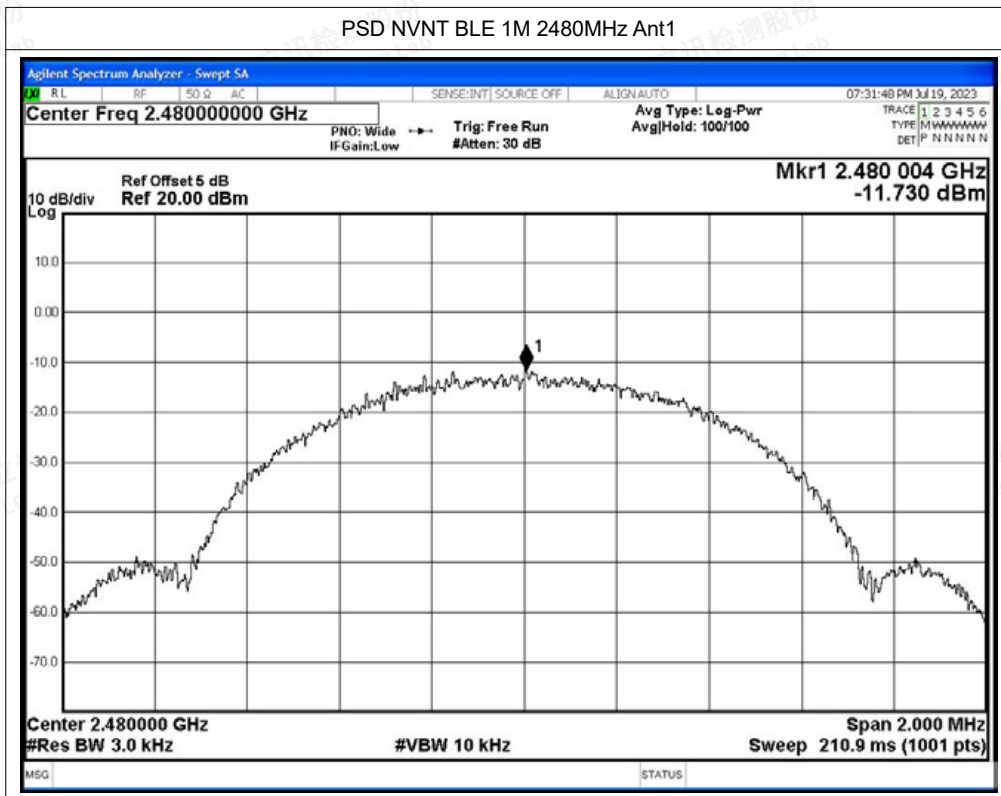





Test Graphs

PSD NVNT BLE 2M 2402MHz Ant1

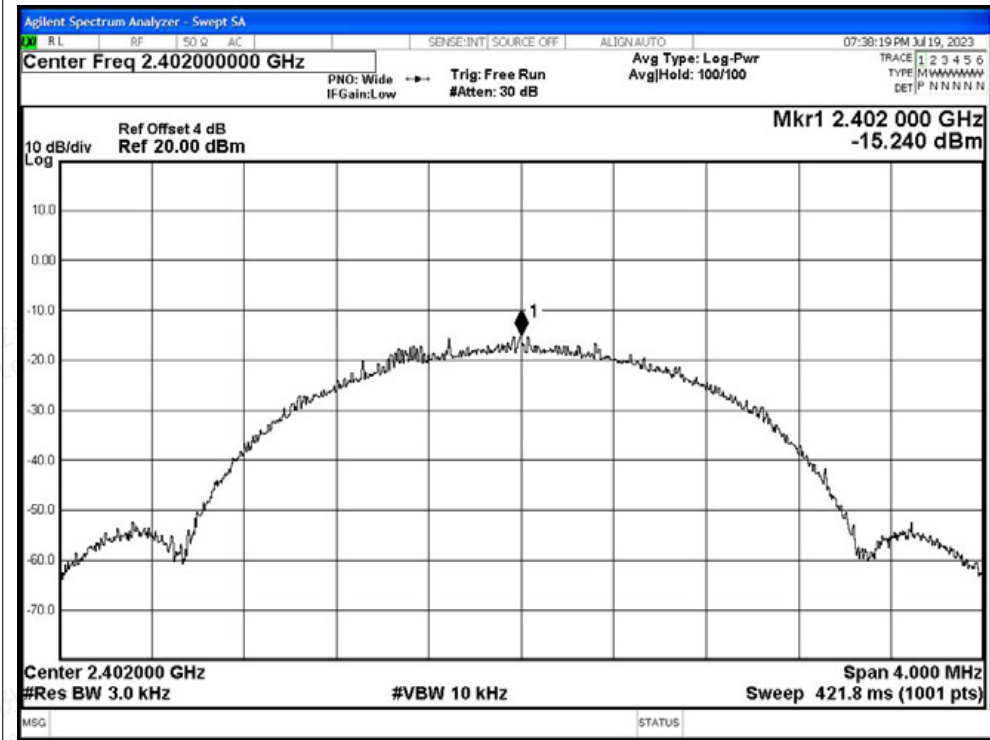

PSD NVNT BLE 2M 2440MHz Ant1

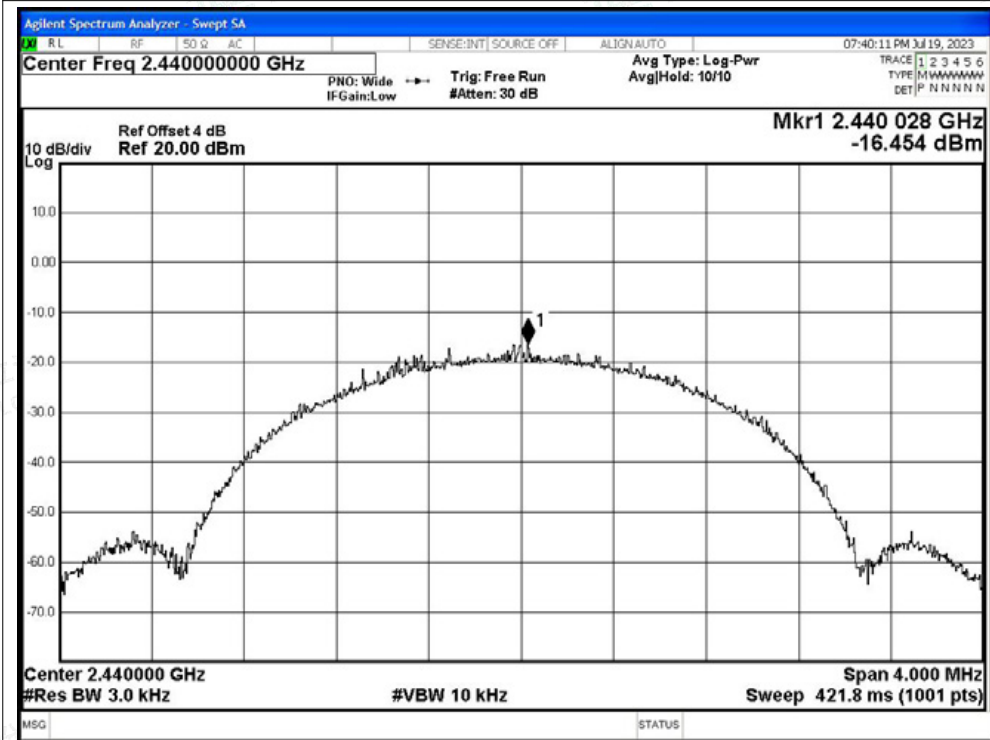

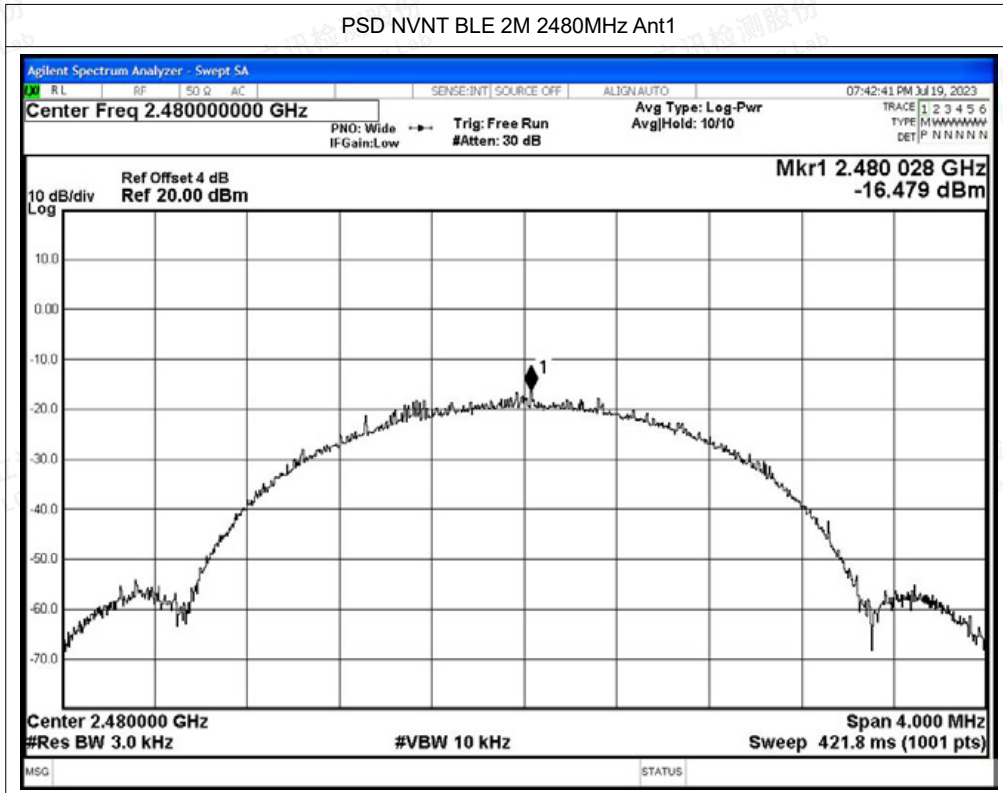



A.4 Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-54.92	-20	Pass
NVNT	BLE 1M	2480	Ant1	-55.78	-20	Pass
NVNT	BLE 2M	2402	Ant1	-48.65	-20	Pass
NVNT	BLE 2M	2480	Ant1	-56.74	-20	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

Band Edge NVNT BLE 1M 2402MHz Ant1 Ref

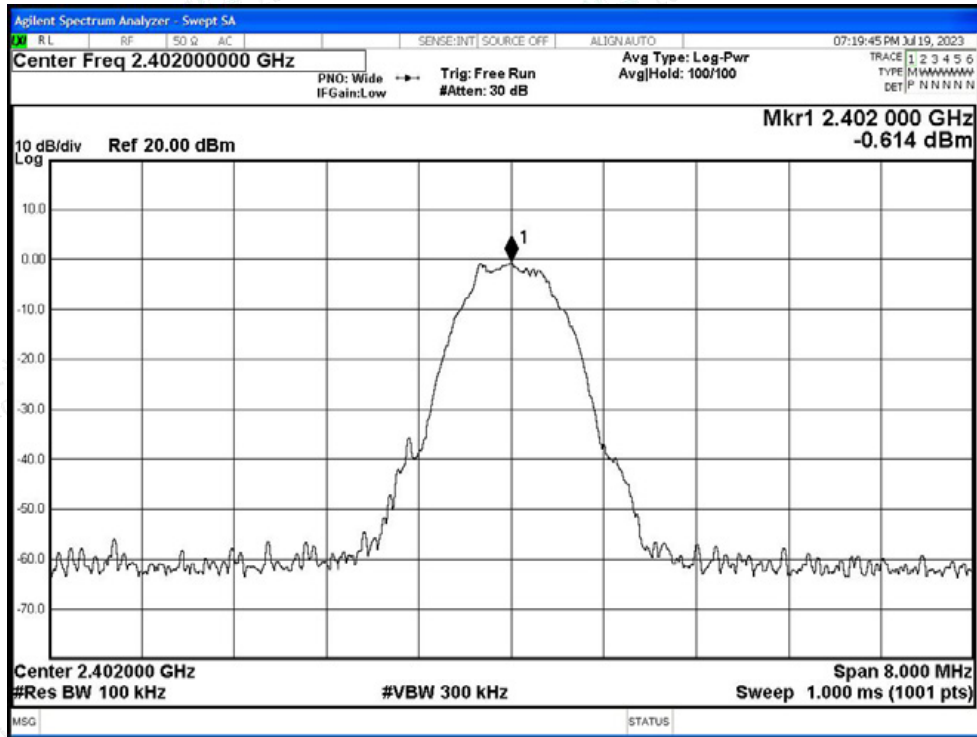


Band Edge NVNT BLE 1M 2402MHz Ant1 Emission

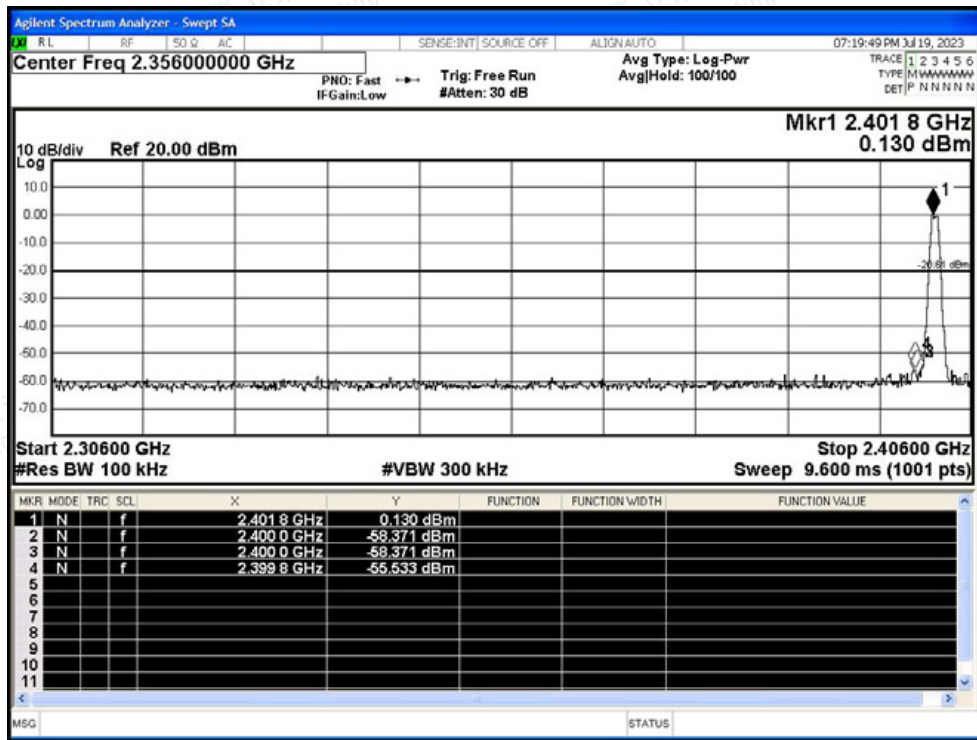




Band Edge NVNT BLE 1M 2480MHz Ant1 Ref

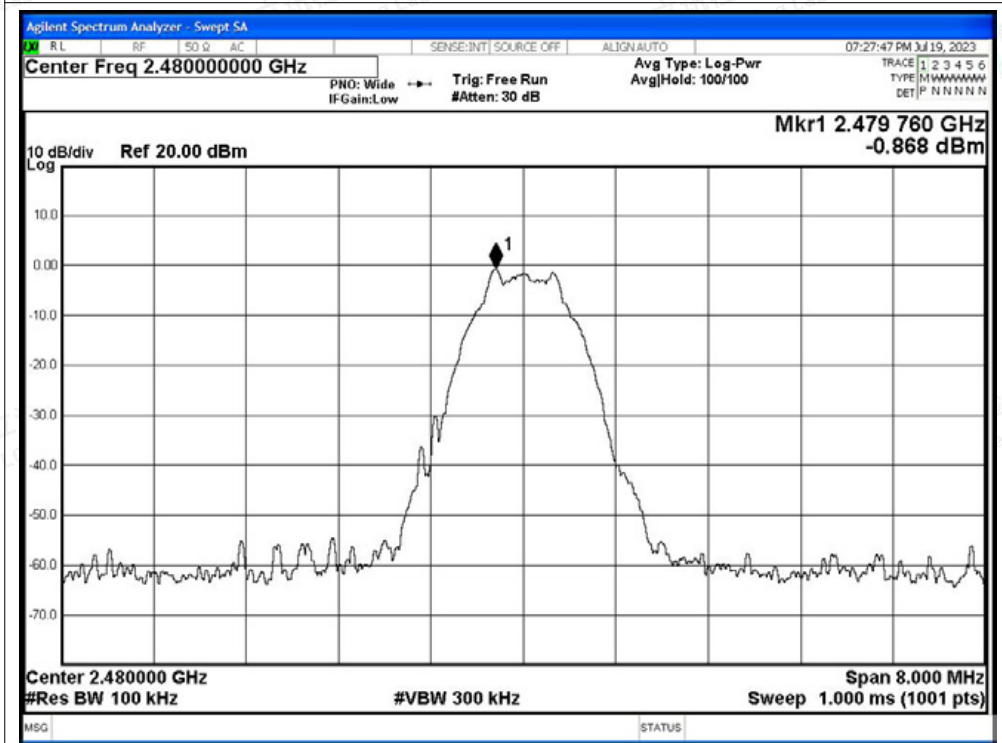


Band Edge NVNT BLE 1M 2480MHz Ant1 Emission

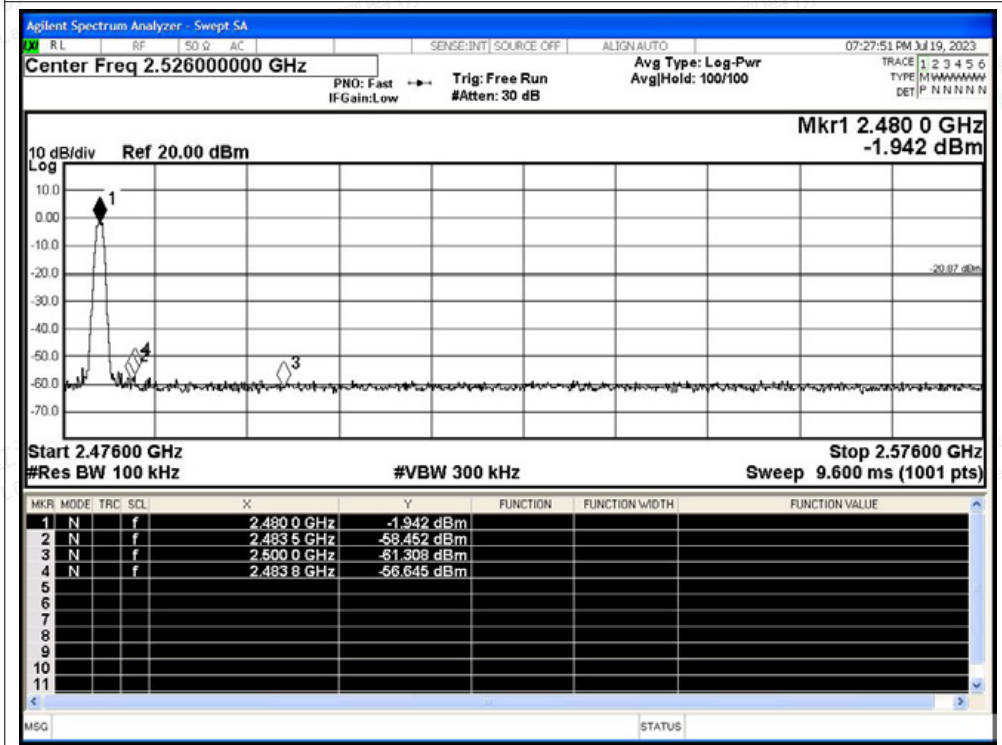




Test Graphs

Band Edge NVNT BLE 2M 2402MHz Ant1 Ref

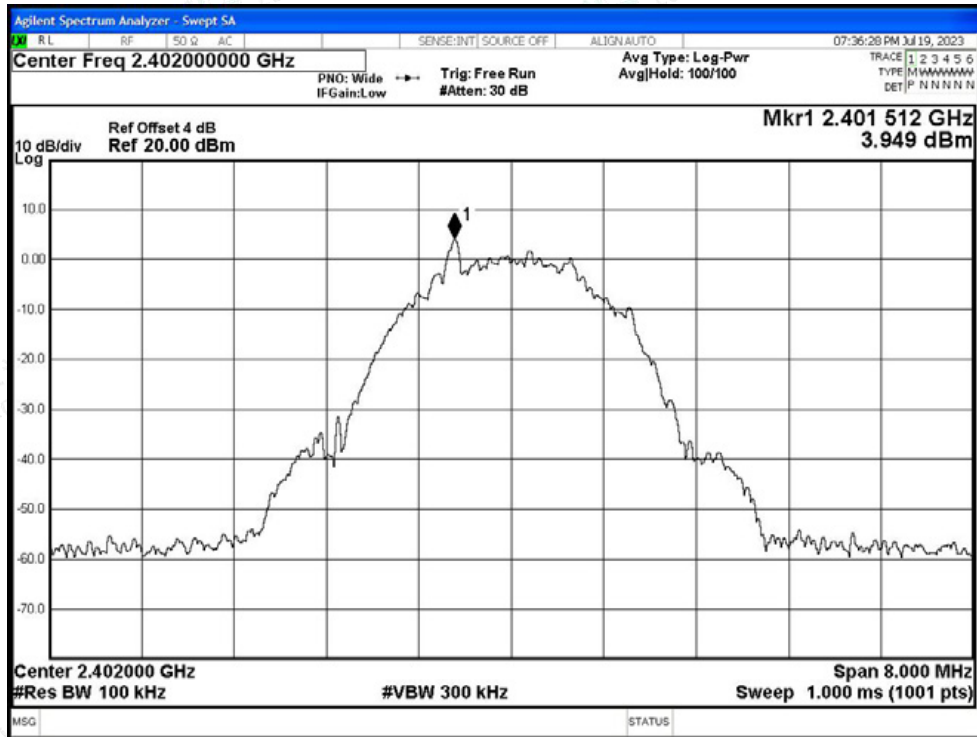


Band Edge NVNT BLE 2M 2402MHz Ant1 Emission

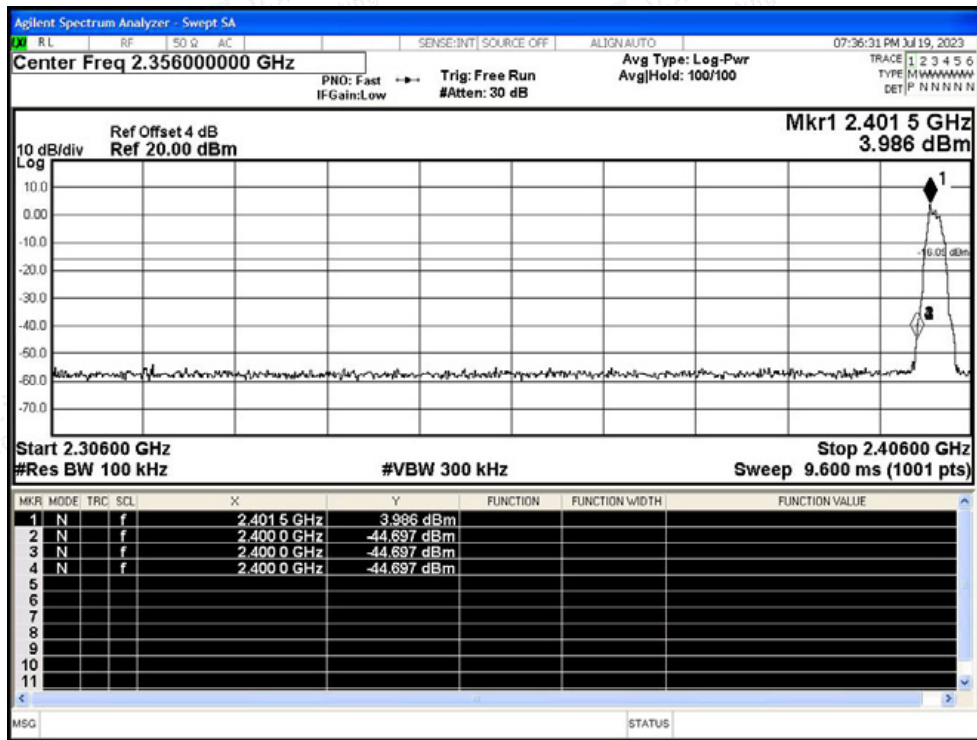




Band Edge NVNT BLE 2M 2480MHz Ant1 Ref

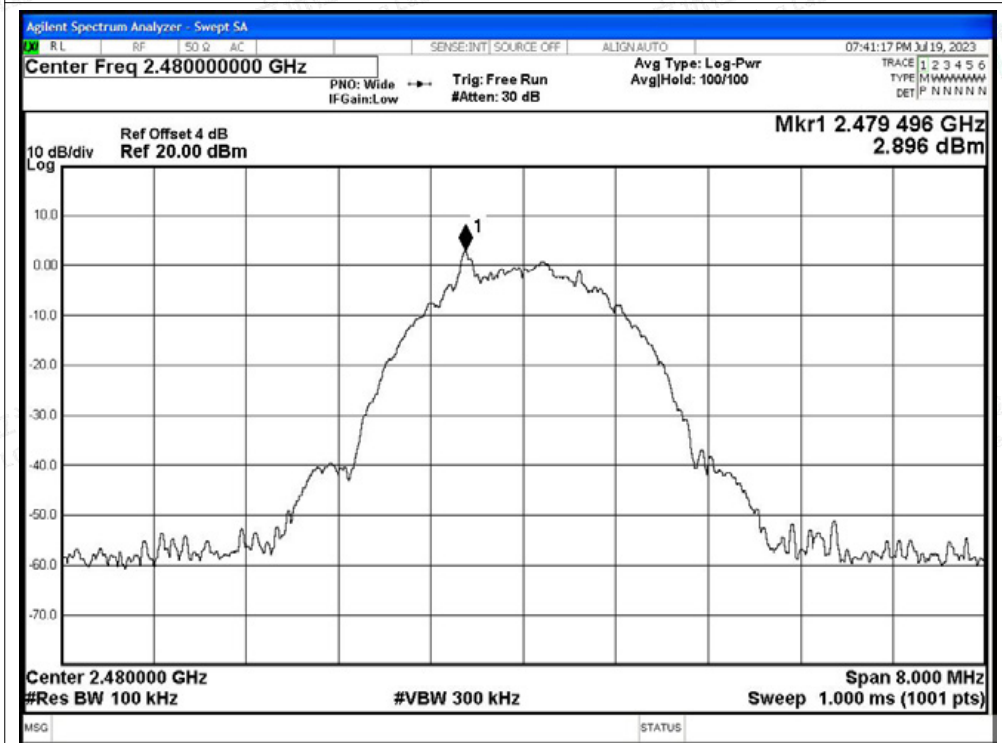

Band Edge NVNT BLE 2M 2480MHz Ant1 Emission

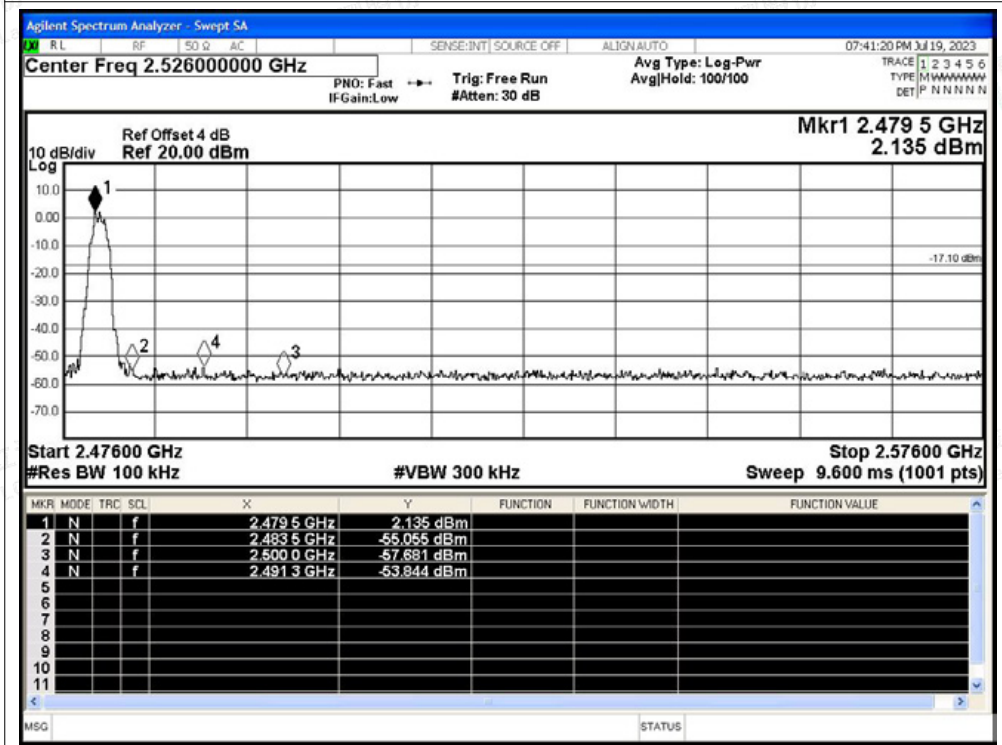



A.5 Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-47.13	-20	Pass
NVNT	BLE 1M	2440	Ant1	-55.15	-20	Pass
NVNT	BLE 1M	2480	Ant1	-57.22	-20	Pass
NVNT	BLE 2M	2402	Ant1	-53.85	-20	Pass
NVNT	BLE 2M	2440	Ant1	-56.07	-20	Pass
NVNT	BLE 2M	2480	Ant1	-54.63	-20	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

Tx. Spurious NVNT BLE 1M 2402MHz Ant1 Ref

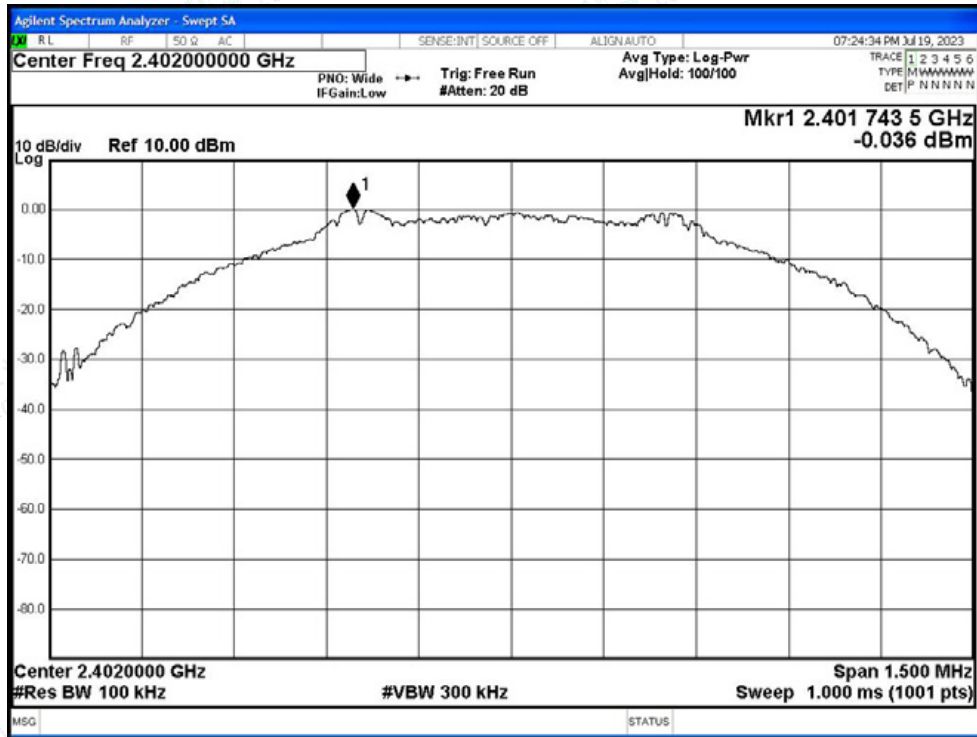


Tx. Spurious NVNT BLE 1M 2402MHz Ant1 Emission

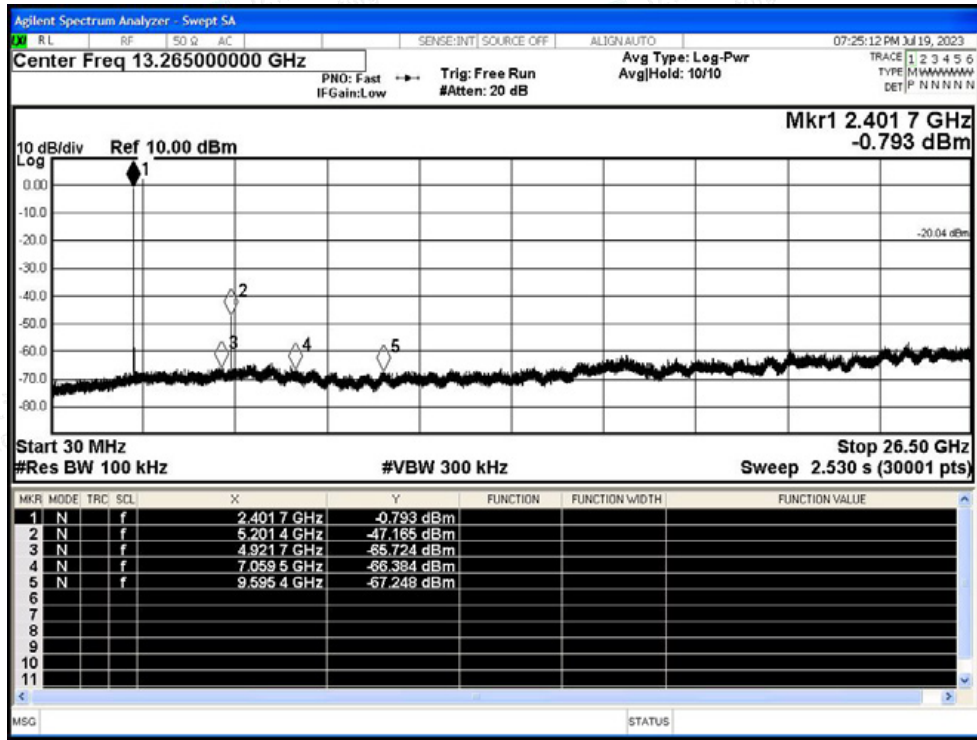




Tx. Spurious NVNT BLE 1M 2440MHz Ant1 Ref

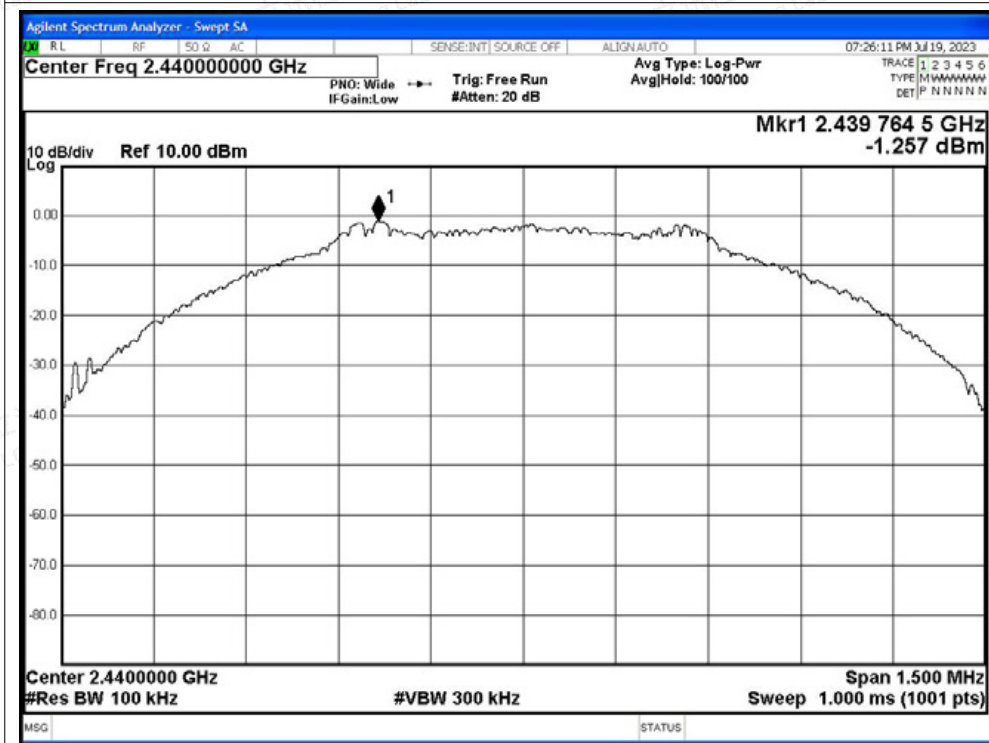


Tx. Spurious NVNT BLE 1M 2440MHz Ant1 Emission

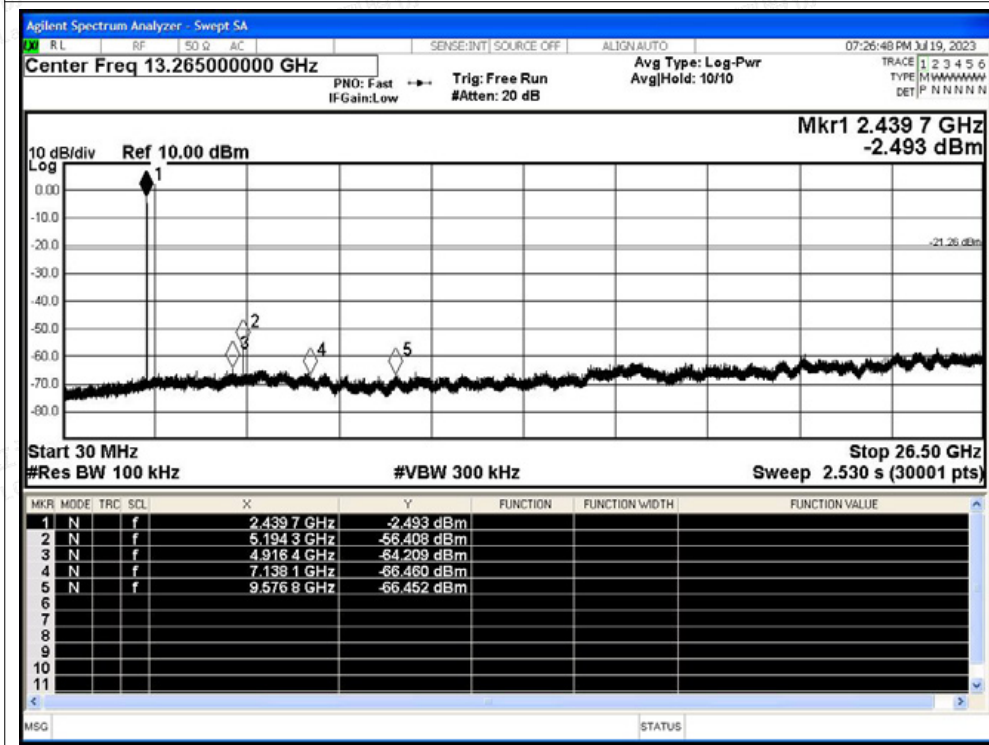




Tx. Spurious NVNT BLE 1M 2480MHz Ant1 Ref

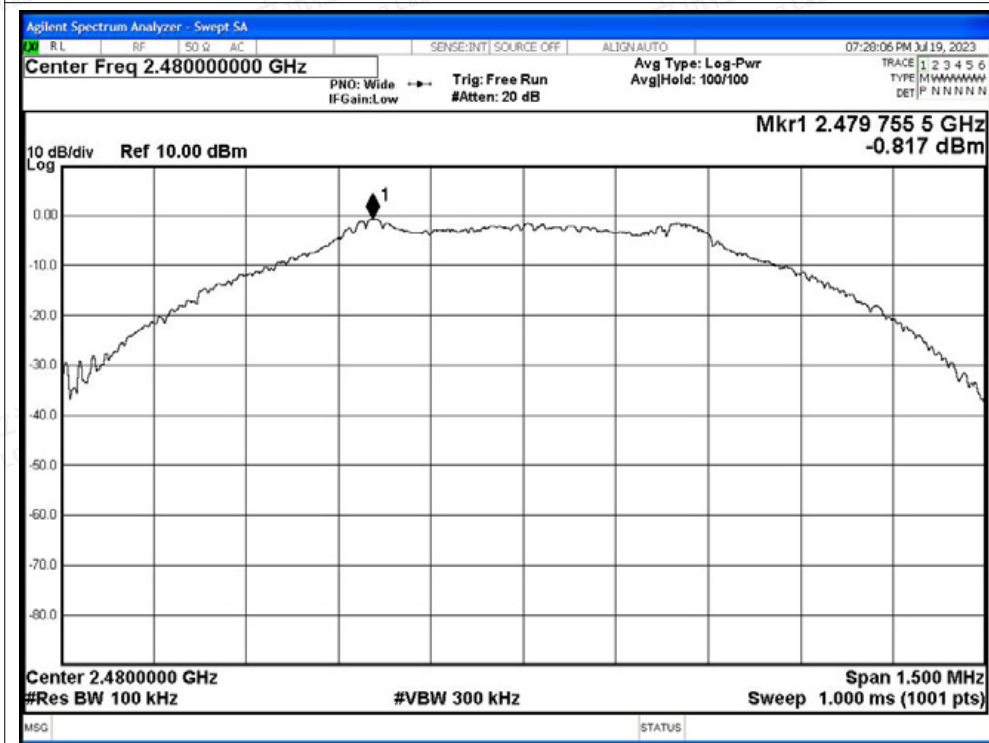


Tx. Spurious NVNT BLE 1M 2480MHz Ant1 Emission

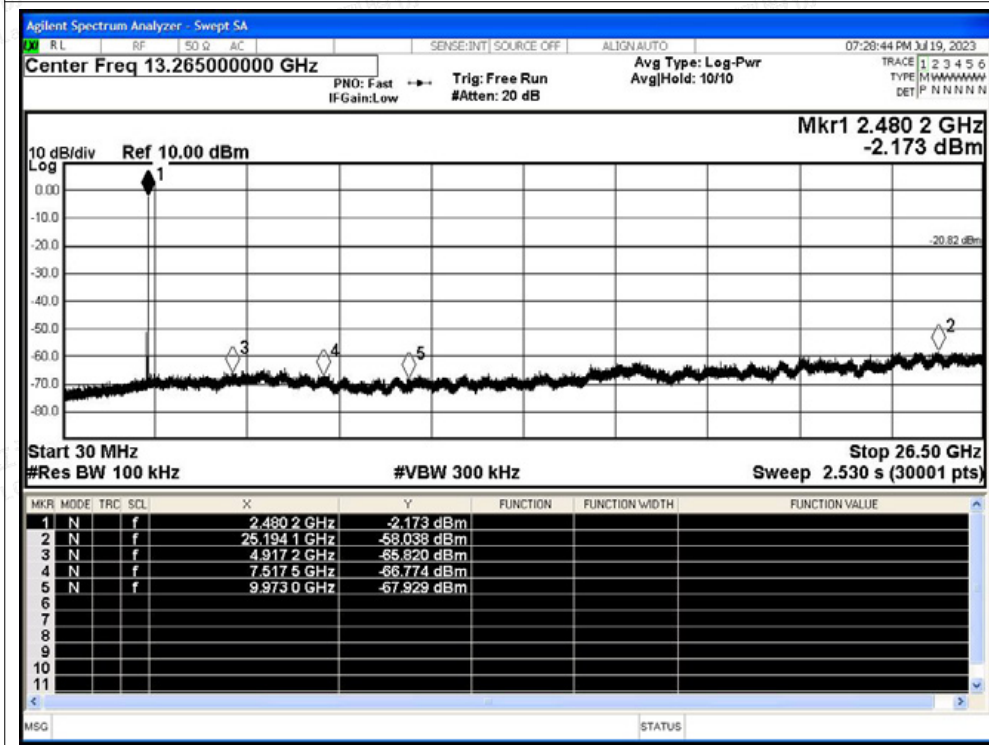




Test Graphs

Tx. Spurious NVNT BLE 2M 2402MHz Ant1 Ref

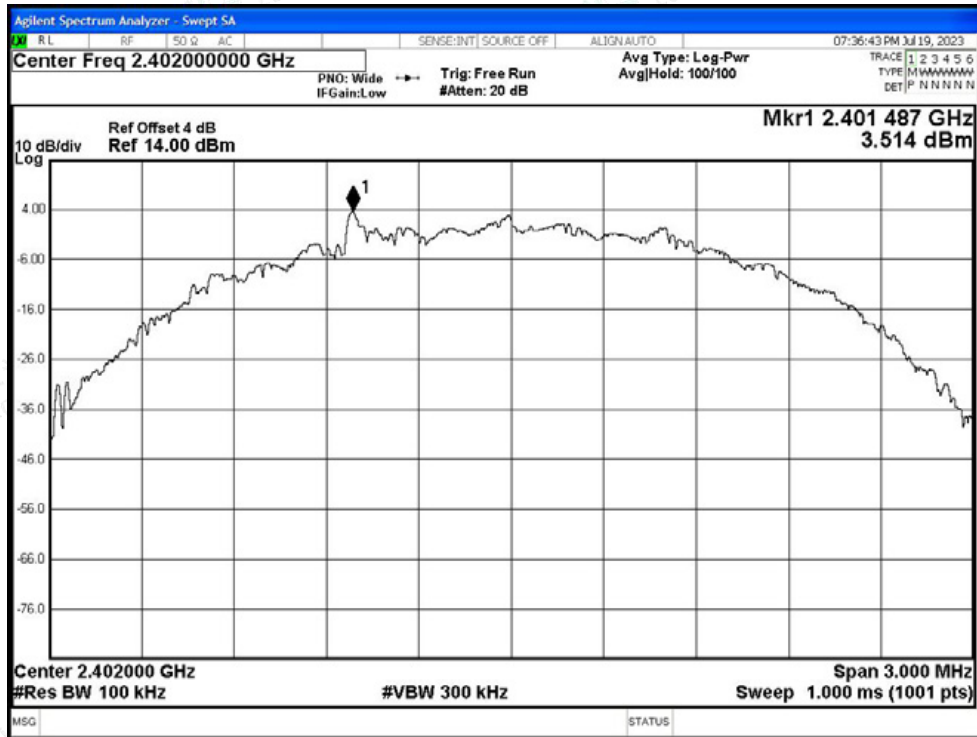


Tx. Spurious NVNT BLE 2M 2402MHz Ant1 Emission

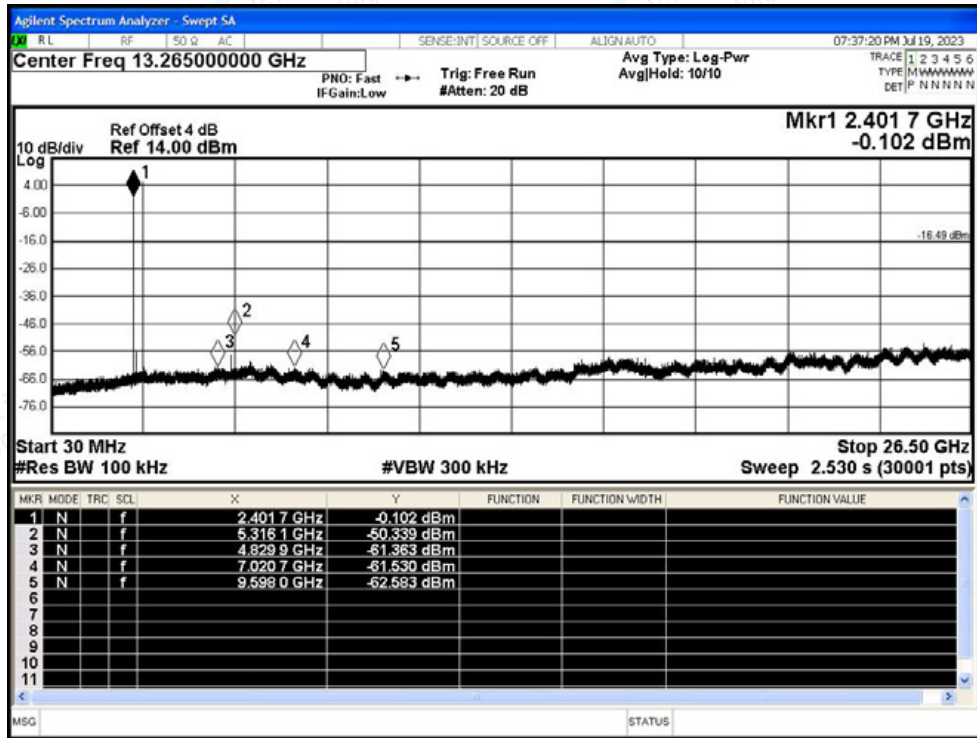




Tx. Spurious NVNT BLE 2M 2440MHz Ant1 Ref

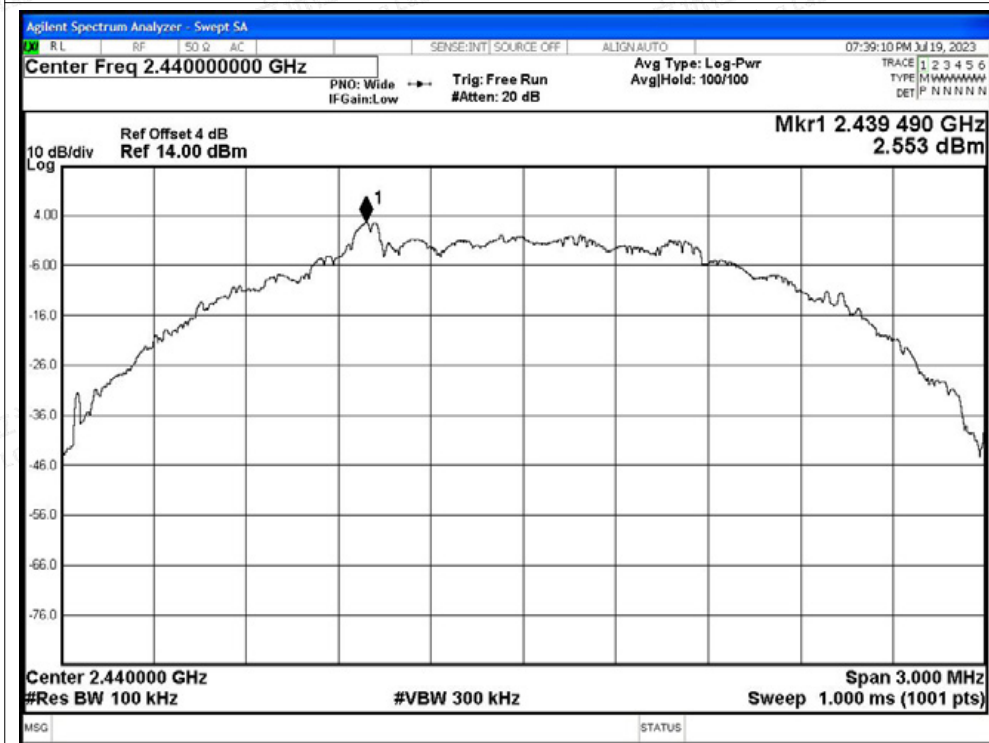


Tx. Spurious NVNT BLE 2M 2440MHz Ant1 Emission

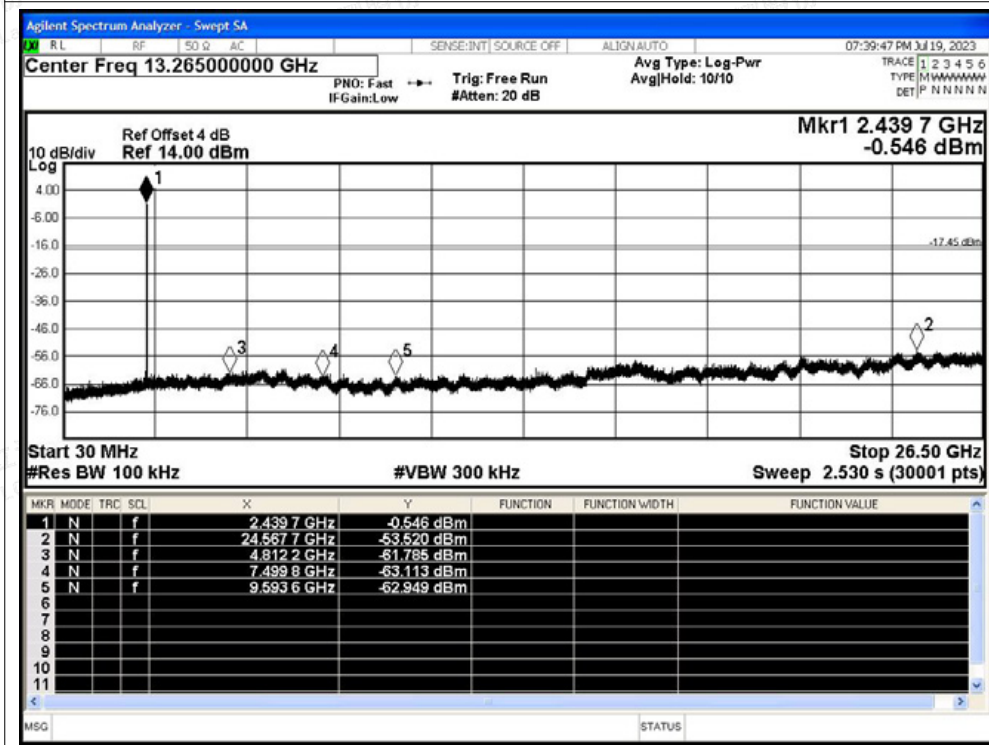




Tx. Spurious NVNT BLE 2M 2480MHz Ant1 Ref

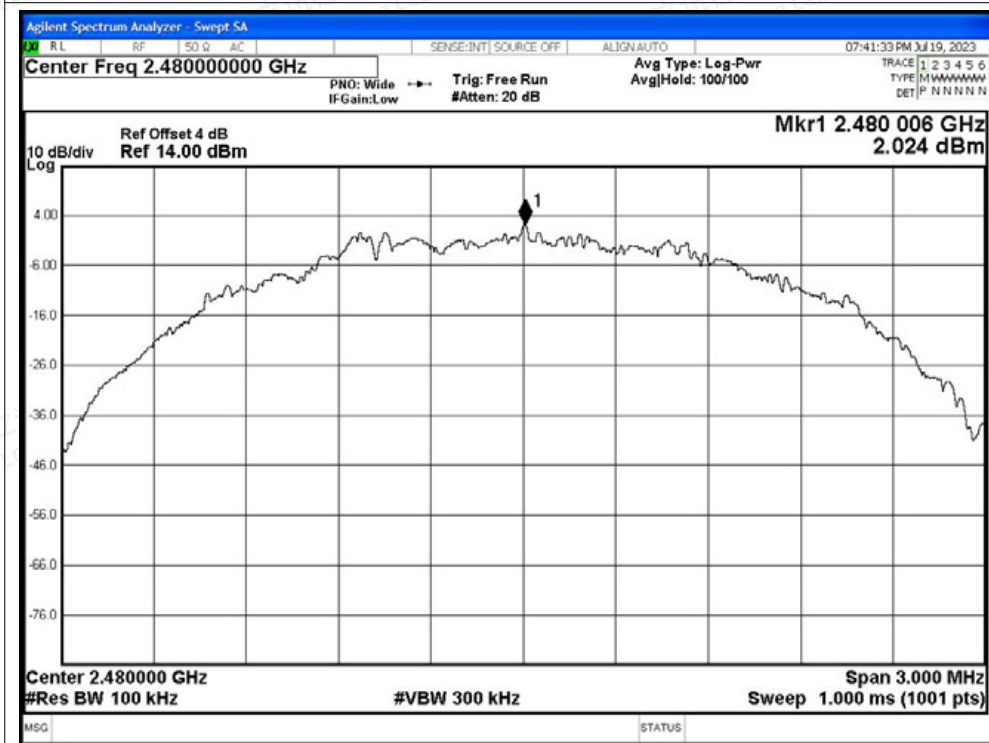

Tx. Spurious NVNT BLE 2M 2480MHz Ant1 Emission

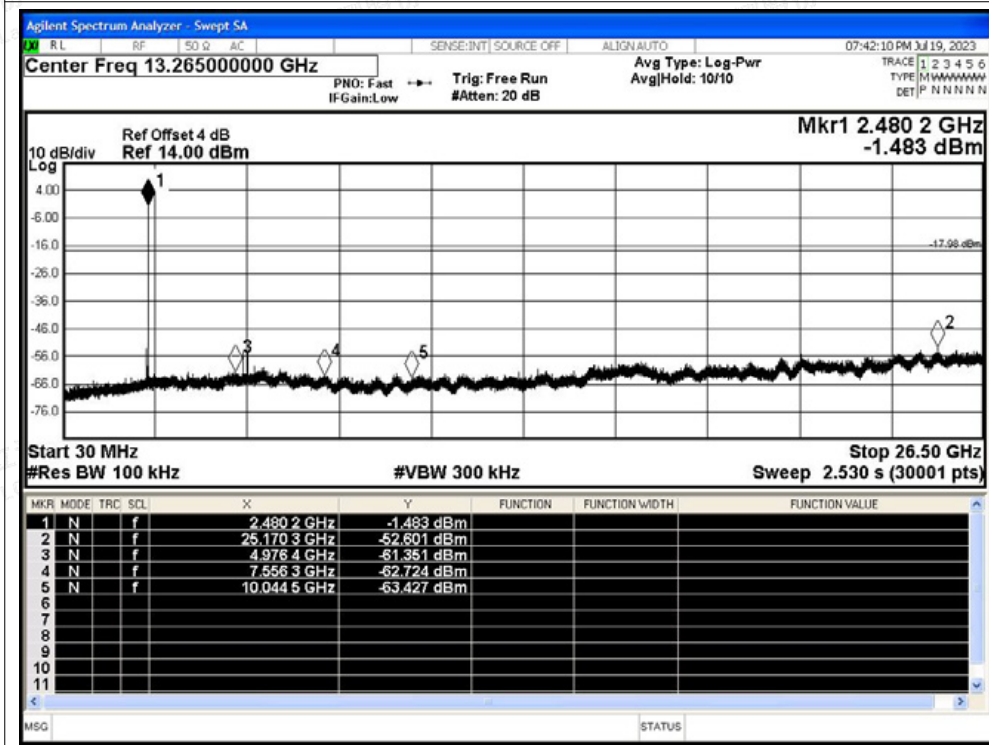



A.6 Duty Cycle

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	BLE 1M	2402	Ant1	85.56	0.68	0.47
NVNT	BLE 1M	2440	Ant1	85.56	0.68	0.47
NVNT	BLE 1M	2480	Ant1	85.56	0.68	0.47
NVNT	BLE 2M	2402	Ant1	57.64	2.39	0.93
NVNT	BLE 2M	2440	Ant1	57.63	2.39	0.93
NVNT	BLE 2M	2480	Ant1	57.63	2.39	0.93




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

Duty Cycle NVNT BLE 1M 2402MHz Ant1

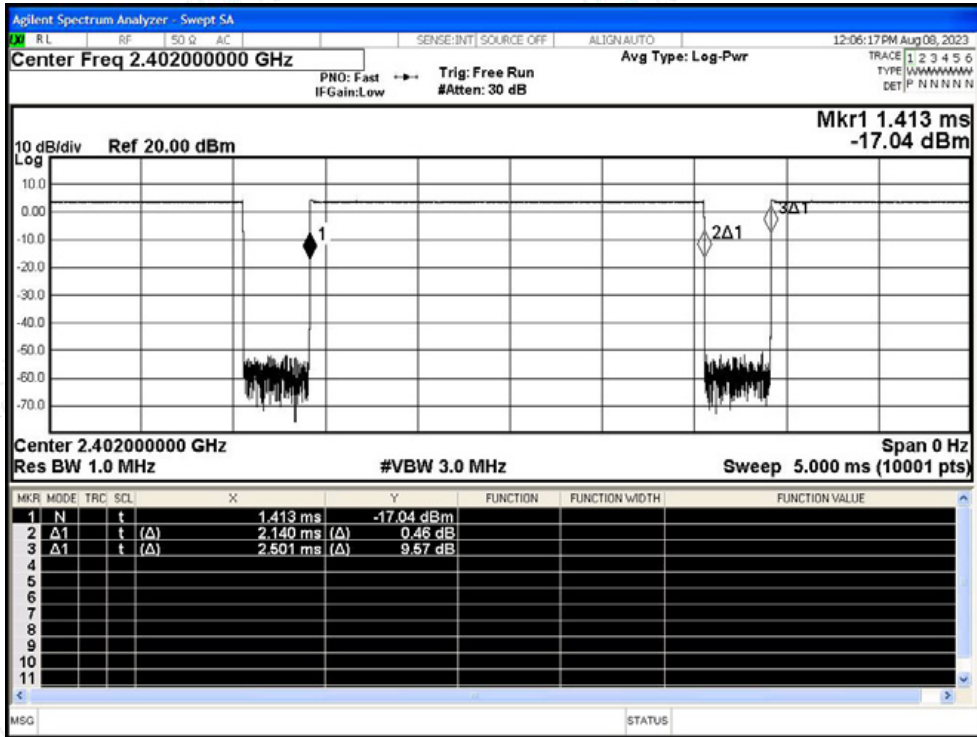


Duty Cycle NVNT BLE 1M 2440MHz Ant1

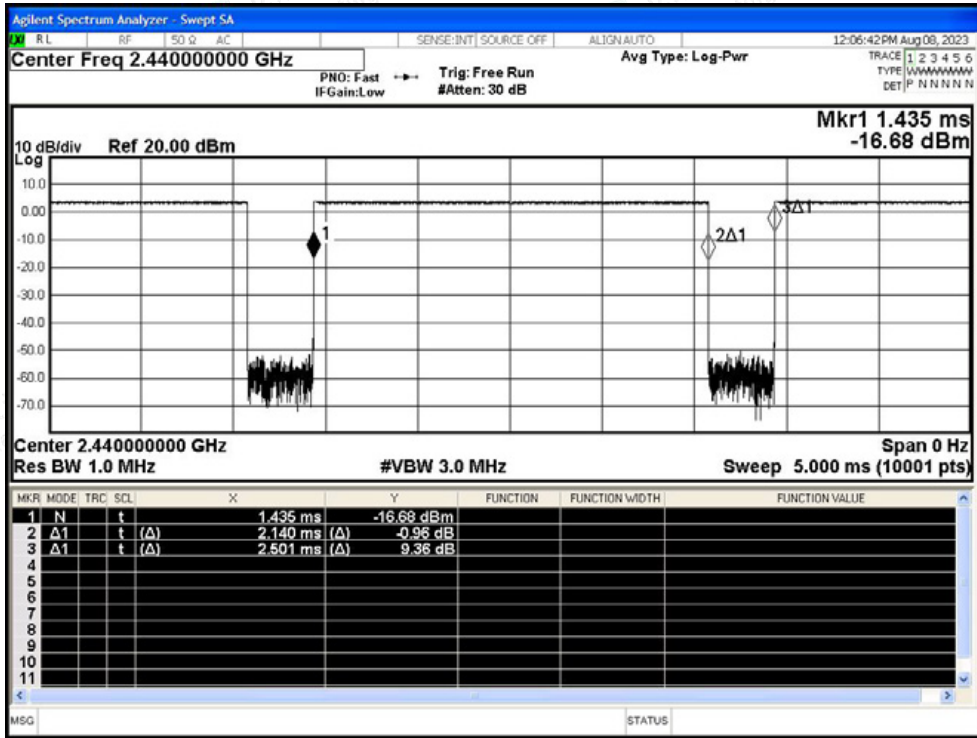




Duty Cycle NVNT BLE 1M 2480MHz Ant1

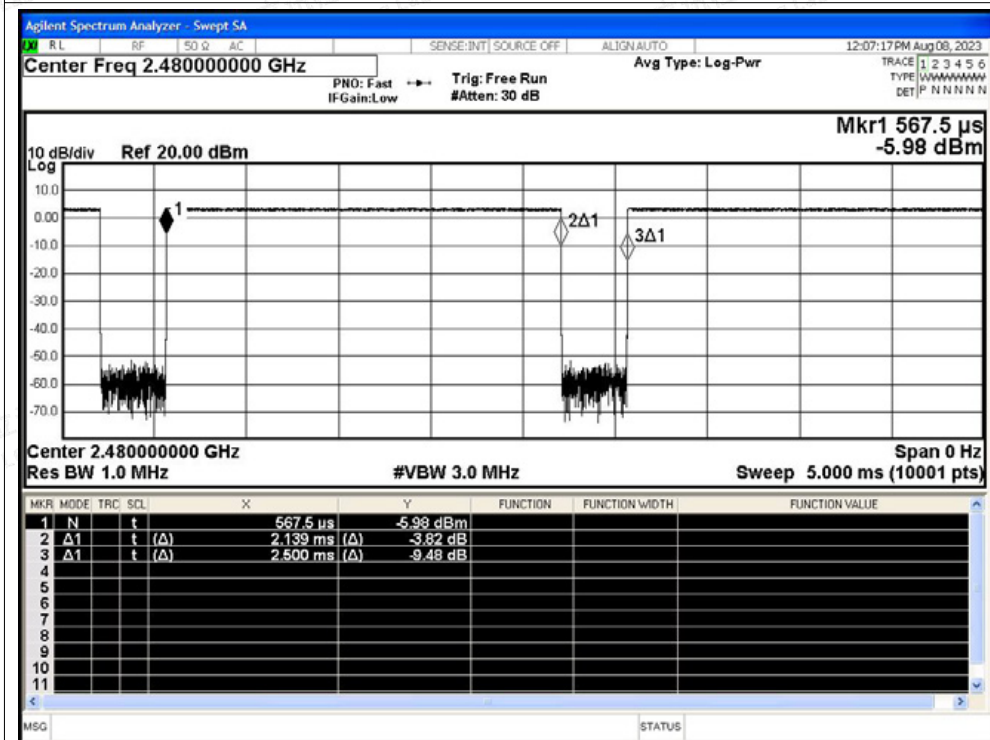


Duty Cycle NVNT BLE 2M 2402MHz Ant1

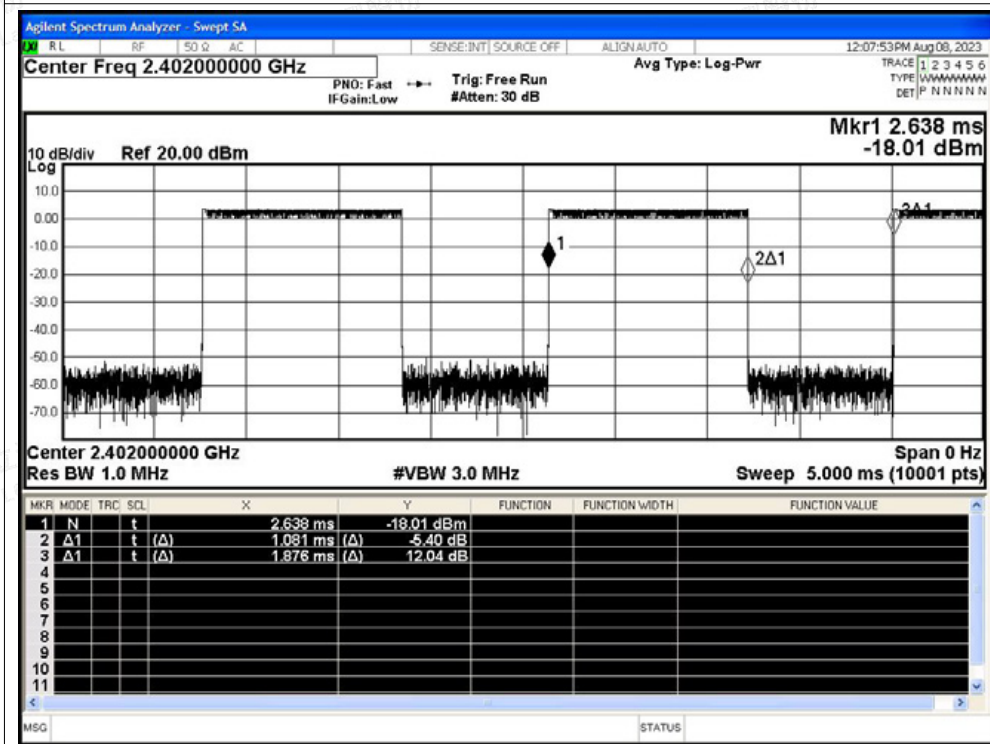




Duty Cycle NVNT BLE 2M 2440MHz Ant1

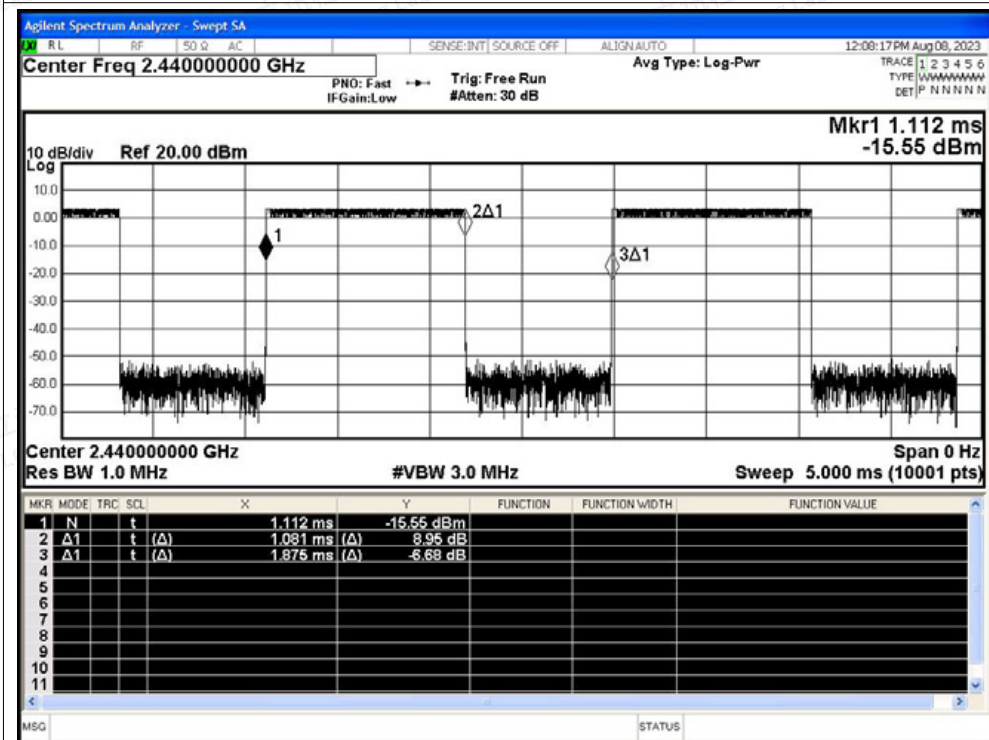

Duty Cycle NVNT BLE 2M 2480MHz Ant1

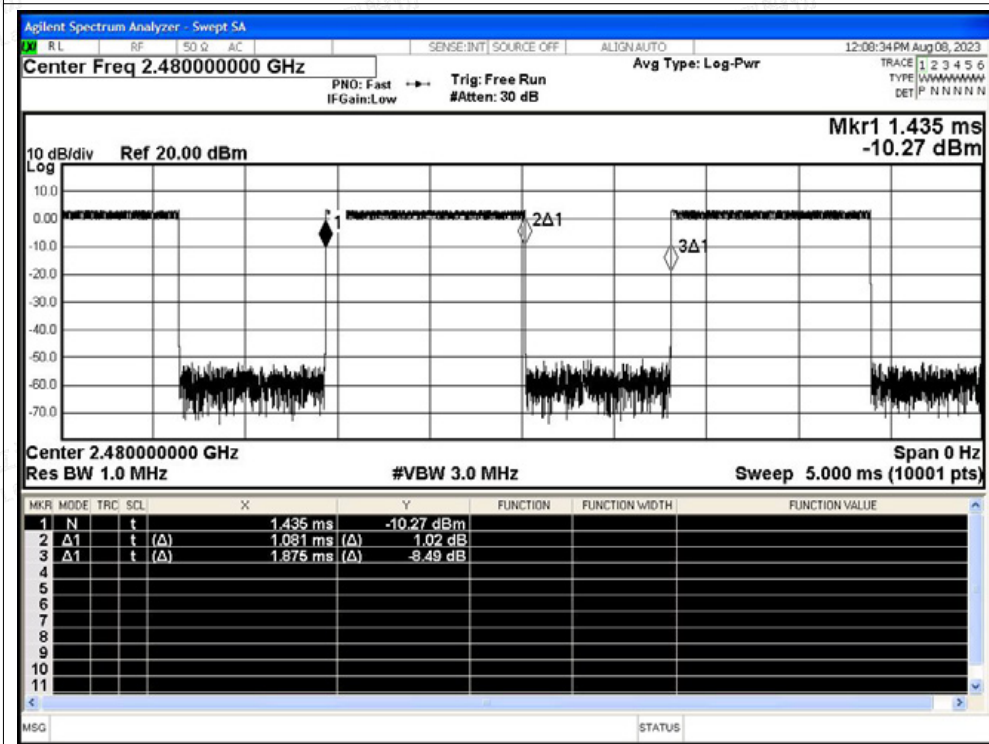



A.7 Restrict Band

Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	BLE 1M	2402	Ant1	2310	-51.11	2	46.15	Peak	74	Pass
NVNT	BLE 1M	2402	Ant1	2310	-52.43	2	44.83	Average	54	Pass
NVNT	BLE 1M	2402	Ant1	2359.344	-49.29	2	47.97	Peak	74	Pass
NVNT	BLE 1M	2402	Ant1	2372.976	-49.2	2	48.06	Average	54	Pass
NVNT	BLE 1M	2402	Ant1	2390	-51.72	2	45.54	Peak	74	Pass
NVNT	BLE 1M	2402	Ant1	2390	-52.41	2	44.85	Average	54	Pass
NVNT	BLE 1M	2480	Ant1	2483.5	-51.28	2	45.98	Peak	74	Pass
NVNT	BLE 1M	2480	Ant1	2483.5	-61.08	2	36.18	Average	54	Pass
NVNT	BLE 1M	2480	Ant1	2483.584	-39.27	2	57.99	Peak	74	Pass
NVNT	BLE 1M	2480	Ant1	2483.92	-60.92	2	36.34	Average	54	Pass
NVNT	BLE 1M	2480	Ant1	2500	-52.69	2	44.57	Peak	74	Pass
NVNT	BLE 1M	2480	Ant1	2500	-61.35	2	35.91	Average	54	Pass
NVNT	BLE 2M	2402	Ant1	2310	-48.11	2	49.15	Peak	74	Pass
NVNT	BLE 2M	2402	Ant1	2310	-51.33	2	45.93	Average	54	Pass
NVNT	BLE 2M	2402	Ant1	2323.728	-44.9	2	52.36	Peak	74	Pass
NVNT	BLE 2M	2402	Ant1	2315.184	-48.5	2	48.76	Average	54	Pass
NVNT	BLE 2M	2402	Ant1	2390	-48.79	2	48.47	Peak	74	Pass
NVNT	BLE 2M	2402	Ant1	2390	-49.53	2	47.73	Average	54	Pass
NVNT	BLE 2M	2480	Ant1	2483.5	-51.63	2	45.63	Peak	74	Pass
NVNT	BLE 2M	2480	Ant1	2483.5	-55.59	2	41.67	Average	54	Pass
NVNT	BLE 2M	2480	Ant1	2483.704	-39.37	2	57.89	Peak	74	Pass
NVNT	BLE 2M	2480	Ant1	2484.304	-48.83	2	48.43	Average	54	Pass
NVNT	BLE 2M	2480	Ant1	2500	-50.93	2	46.33	Peak	74	Pass
NVNT	BLE 2M	2480	Ant1	2500	-55.71	2	41.55	Average	54	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
 Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
 Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
 Scan code to check authenticity




Test Graphs

Restrict Band NVNT BLE 1M 2402MHz Ant1 Peak

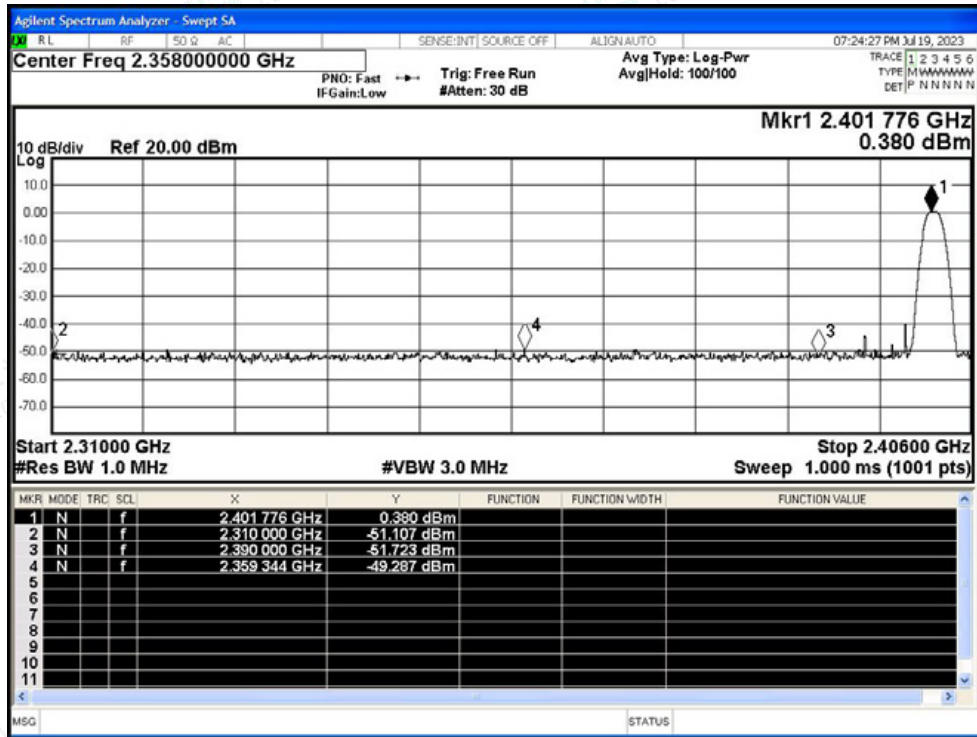


Restrict Band NVNT BLE 1M 2402MHz Ant1 Average

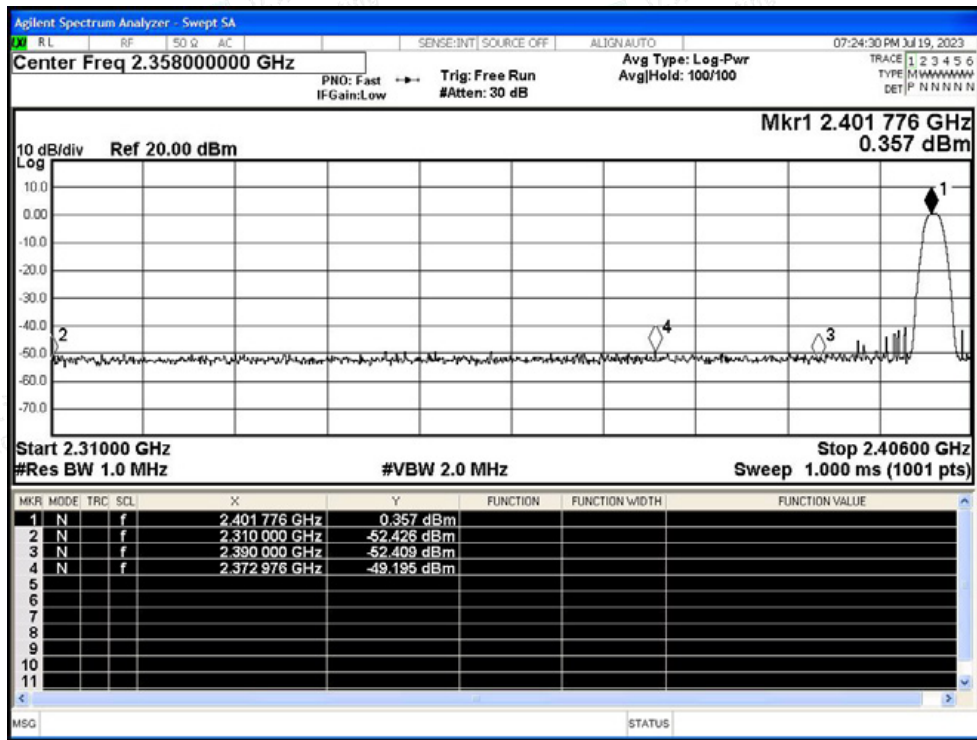




Restrict Band NVNT BLE 1M 2480MHz Ant1 Peak

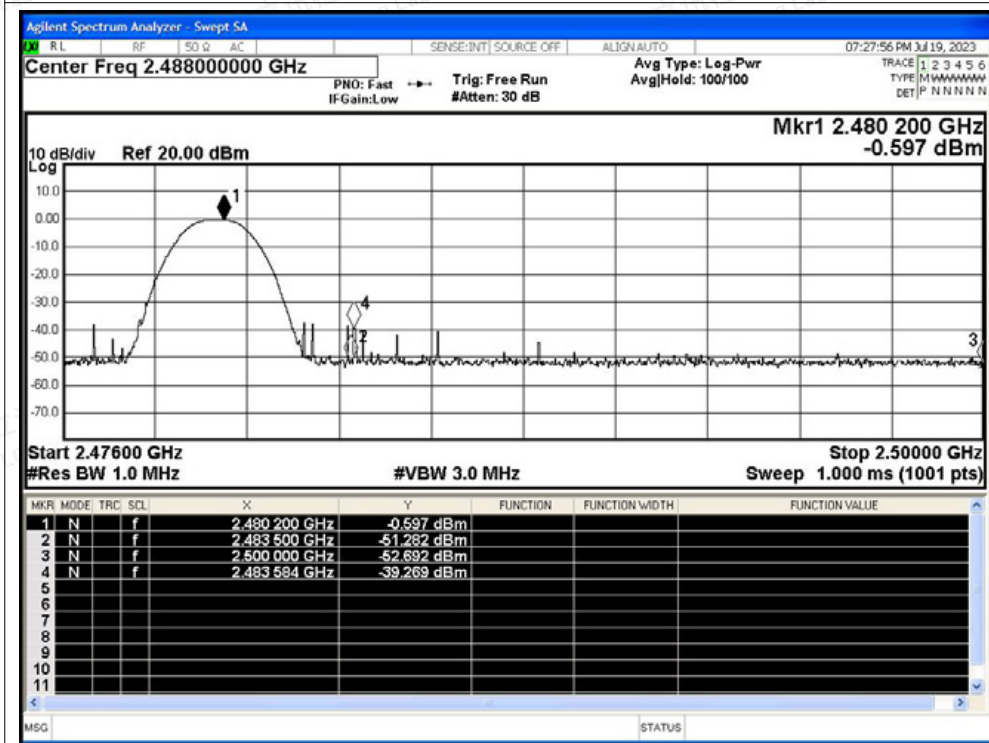


Restrict Band NVNT BLE 1M 2480MHz Ant1 Average

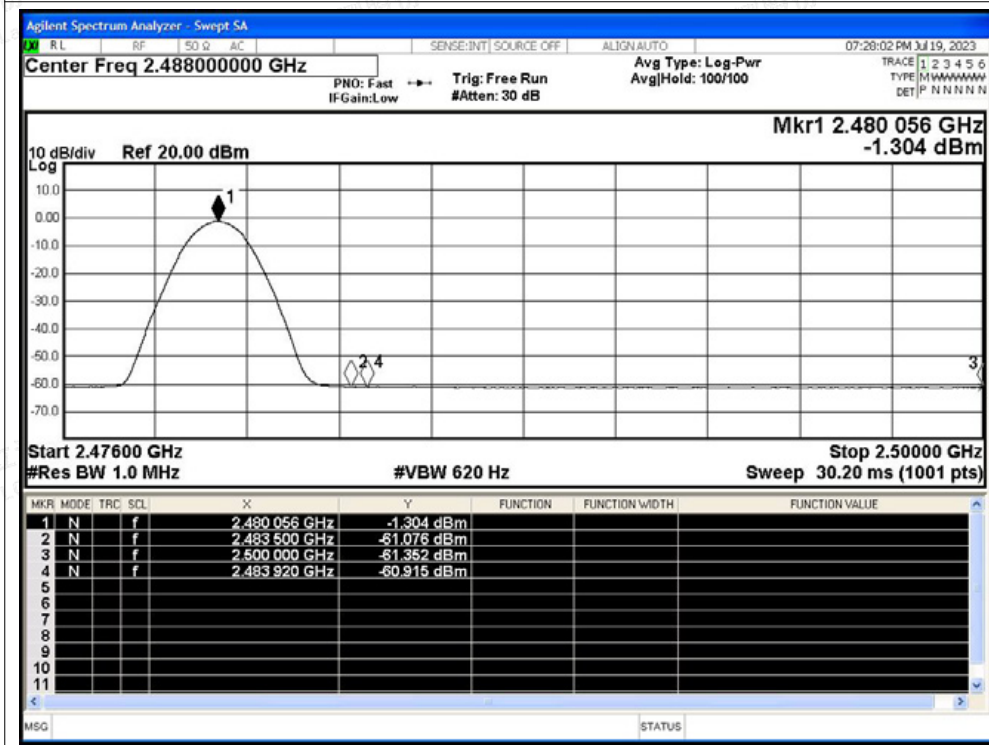




Test Graphs

Restrict Band NVNT BLE 2M 2402MHz Ant1 Peak

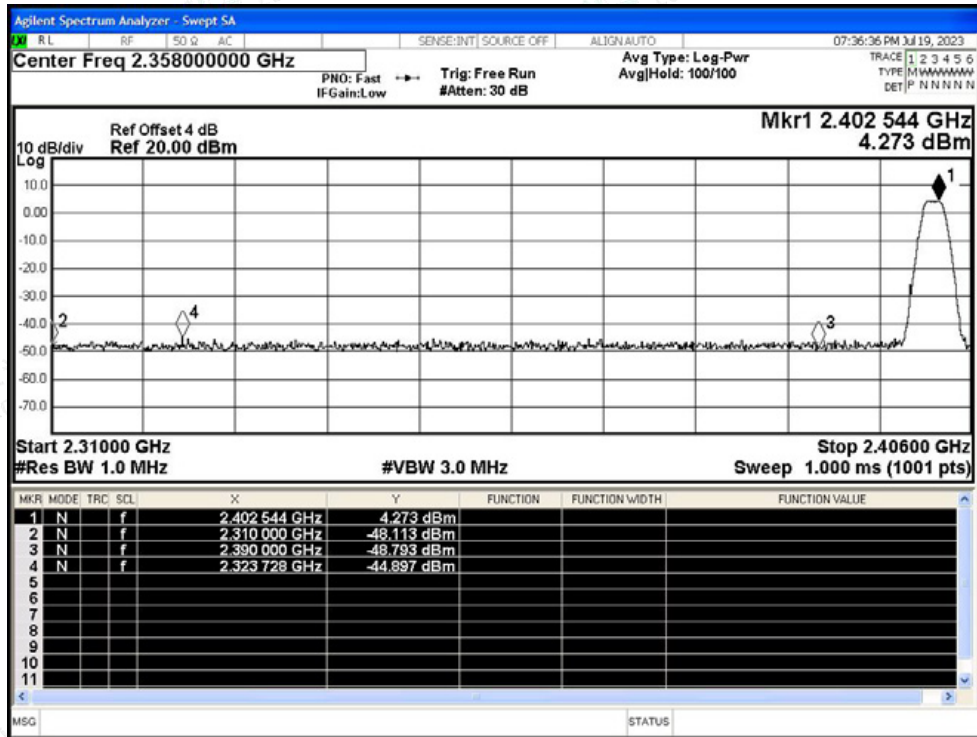


Restrict Band NVNT BLE 2M 2402MHz Ant1 Average

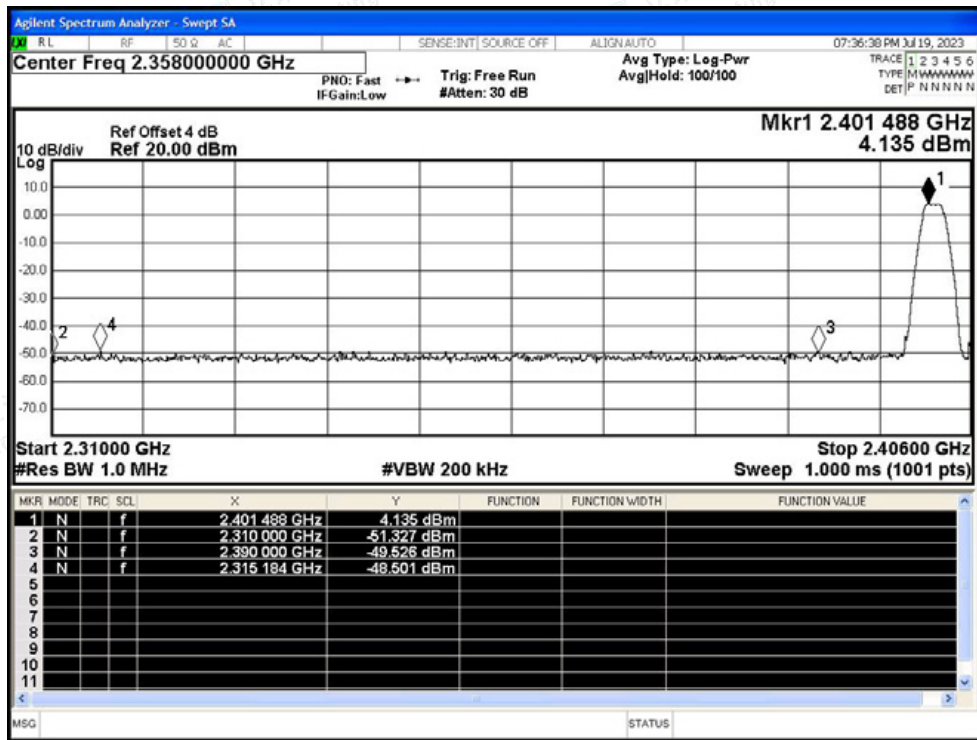



Restrict Band NVNT BLE 2M 2480MHz Ant1 Peak

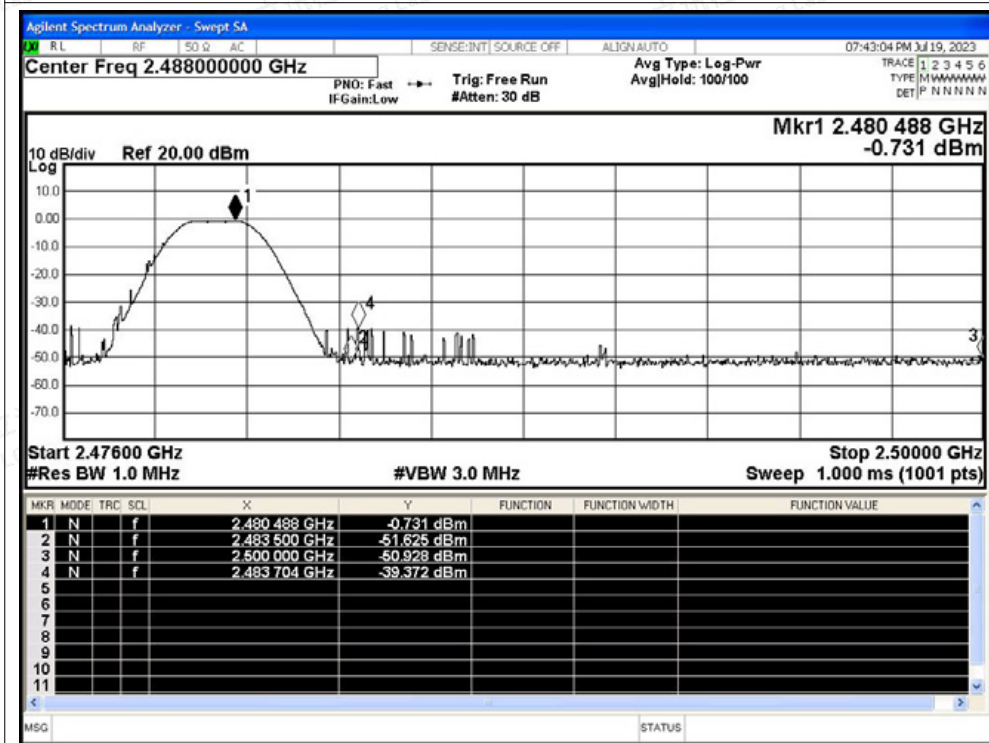

Restrict Band NVNT BLE 2M 2480MHz Ant1 Average

