



## **RF-360T**

### **Combination Alarm**

- **Optical**
- **Rate of Rise**
- **Fixed Temperature**

with **interLNX™**



MADE IN THE U.S.A.

## **Table of Contents**

General Information About Your New Dual Detector Smoke Alarm .....	page 3
Contents of your Kit .....	page 4
Recommended Locations for Your Smoke Alarm .....	page 5
Alarm Features and Functions.....	page 6 - 7
National Fire Protection Association Standards .....	page 8 - 9
Areas Not Appropriate For Smoke Alarms.....	page 10
Choosing the Mounting Location in a Room .....	page 11
Acceptable Alarm interLNX Network Spacing.....	page 12
Creating Your interLNX Network Spacing.....	page 12
Adding an Alarm to Your Network.....	page 13
Removing an Alarm from Your Network.....	page 13
How to Mount the Smoke Alarm .....	page 14 - 15
Electrical Wiring and Installation .....	page 16
Cleaning Your Alarm .....	page 17
Important Fire Safety Information .....	page 19
Warning! Limitations on Smoke Alarms .....	page 20
Alarm Specifications .....	page 21
Limited Warranty Information .....	page 22

*Applied Fire Technologies recommends a combination of early-detecting Smoke Alarms and reliable Heat Alarms installed in their appropriate locations throughout the home.*

*Heat and Smoke Alarms are not a substitute for an adequate homeowner's fire insurance policy.*

## About Your New Dual Sensor Photoelectric Smoke Alarm


Thank you for purchasing the Homefront Smoke Alarm. The smoke alarm plays an important role in protecting your family and home from the dangers of fire. Please carefully read and follow the information in this booklet to ensure that your Alarm operates properly and is located in the areas best suited for activation.

## What Makes the Homefront Alarm Different?



## Contents of Your Kit


Please make sure the following is included in your kit:

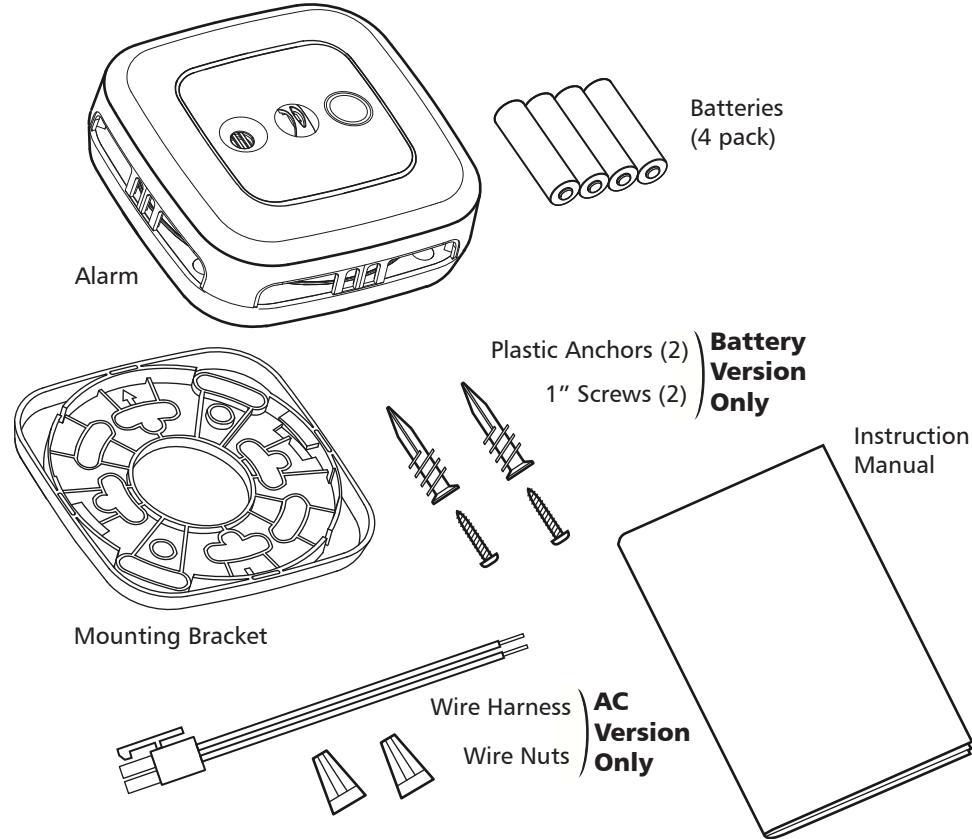


## Features

The latest photoelectric smoke sensing technology.  
Electronic temperature sensing with Rate of Rise and Fixed Temperature triggers.  
Radio communication to connect all RF360T alarms into their own Home Network.  
Powered by easily available AA alkaline batteries.  
Easy maintenance with separable sections and removable bug screen.  
Four illuminated icons to demonstrate alarm status.  
Multi-function button to allow for testing and silencing of unwanted triggering.  
Uniquely loud horn to notify occupants of fire danger.  
Top quality construction to ensure beautiful appearance and durability.


## Recommended Locations for your Smoke Alarm

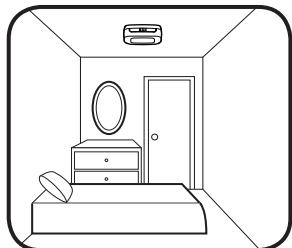


**Bedrooms.** A major threat from fire occurs at night when people are sleeping. Smoke alarms are required protection in all sleeping rooms.

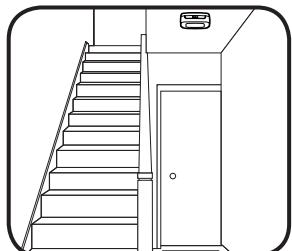


**Hallways.** A principle threat to people sleeping in bedrooms comes from fires elsewhere in the home. A smoke alarm is required to be located outside of each sleeping area, and on every floor of the home.

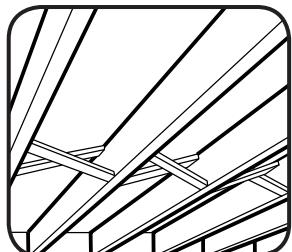

**Basements.** A smoke alarm is required on every level of the house, including the basement and in living areas of guest suites.

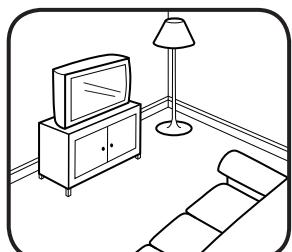


**Living Rooms.** To enhance safety, a smoke alarm should be located in the living room of a home.

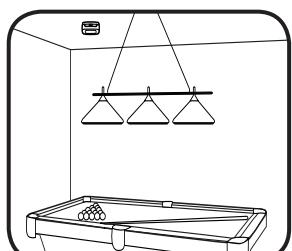

**Recreation and Dining Rooms.** For additional protection, a smoke alarm should be located in the other living spaces of the home.


## Alarm Features and Functions

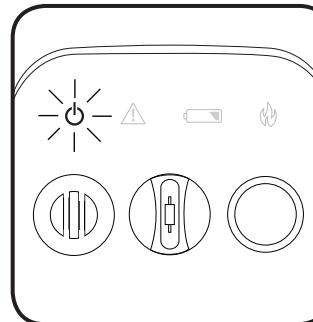

### Power Indicator Light

On Model RF-360TB (Battery-Only powered), the POWER icon will briefly flash once per minute.

On Model RF-360TEB (AC with Battery Backup), the POWER icon will run continuously.

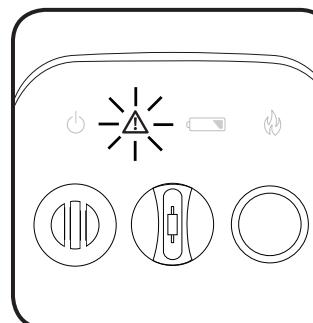


### Warning/Trouble Light

WARNING will flash once per second to indicate that the interLNX network is open to accept new alarms.

WARNING can also indicate a problem with the alarm's smoke sensitivity. In this case, the WARNING light will flash once per minute accompanied by the horn chirp.


*If this occurs, clean the alarm (as described in this manual)*

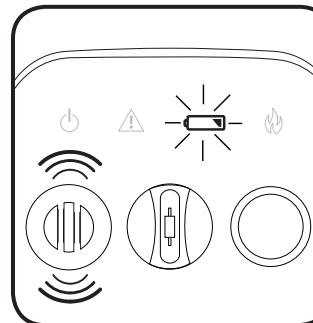

### Low Battery Warning Light

BATTERY will flash once per minute with a corresponding horn chirp to indicate the batteries must be replaced.

Replace batteries only with Energizer E91 AA batteries.

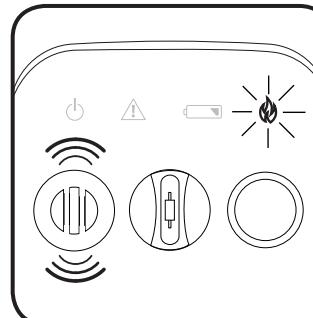

### Fire Warning Light


FIRE will flash when alarm detect sufficient smoke or heat. This is accompanied by the sounding of the horn.

FIRE will stay on continuously if the alarm was triggered remotely by another alarm on the interLNX network.

## Alarm Features and Functions

### Testing the Alarm

Every alarm should be tested weekly to ensure proper operation.

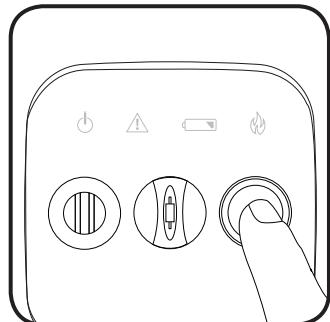

To test the alarm, press and release the button on the front face.



The alarm will sound with 3 or 4 beeps and FIRE will flash rapidly.


All four icons will strobe to indicate proper function.

The alarm will then send out a network test command and all other alarms on the network will perform the steps above.

*If the alarm fails, the horn will sound for several seconds. Clean the alarm (as described in this manual) and retest. If the alarm still fails, contact the manufacturer.*

### Silencing Nuisance Alarms

The Homefront family of alarms is equipped with a silence feature that will decrease the sensitivity of the alarm and silence nuisance alarm.

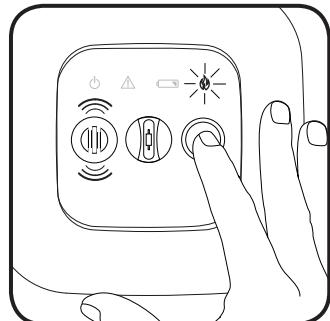

If in the course of normal activity, cooking smoke, steam or other gases cause the alarm to activate, the alarm can be silenced for ten minutes by pressing the button on the front face of the alarm.

The silence feature will also silence any alarms that were triggered remotely. However, the initiating alarm must be silenced directly.

If the quantity of smoke or steam is too great, the alarm will not silence until the air has cleared sufficiently.

## Complete Home Fire Protection


Applied Fire Technologies recommends complete home fire protection. This can be achieved by installing a combination of Smoke and Heat Alarms in their appropriate locations in every room of the house.

### Key


NFPA Minimum Req'd Smoke Alarms in New Construction

Recommended Heat Alarm locations

--- Interconnections

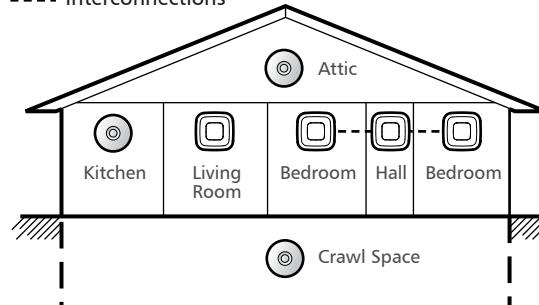

**Single Story Homes**

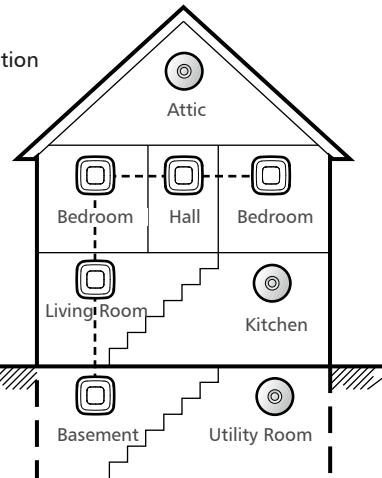

**Two Story Homes**

## National Fire Protection Association Standards

This equipment should be installed in accordance with the National Fire Protection Association's Standard 72 (National Fire Protection Association, Batterymarch Park, Quincy, MA 02269).

For your information, the National Fire Protection Association's Standard 72, 2010 Edition, Section 29.5.1 covering required protection in One- and Two-Family Dwelling Units, reads as follows:

**29.5.1.1 Required Detection.** Where required by other governing laws, codes, or standards for a specific type of occupancy, approved single- and multiple-station smoke alarms shall be installed as follows:

- (1) In all sleeping rooms and guest rooms
- (2) Outside each separate dwelling unit sleeping area, with 21 ft (6.4 m) of any door to a sleeping room, with the distance measured along a path of travel
- (3) On every level of the dwelling unit, including basements
- (4) On every level of a residential board and care occupancy (small facility), including basements and excluding crawl spaces and unfinished attics.
- (5) In the living area(s) of a guest suite
- (6) In the living area(s) of a residential board and care occupancy (small facility)

### A.11.8.3 (NFPA 72 2002 Edition) Are More Smoke Detectors Desirable?


The required number of smoke detectors might not provide reliable early warning protection for those areas separated by a door from the areas protected by the required smoke detectors. For this reason, it is recommended that the householder consider the use of additional smoke detectors for those areas for increased protection. The additional areas include the basement, bedrooms, dining room, furnace room, utility room, and hallways not protected by the required smoke detectors. The installation of smoke detectors in kitchens, attics (finished or unfinished), or garages is not normally recommended as these locations occasionally experience conditions that can result in improper operation.

**Note:** Applicable building codes or other local laws may require the installation of additional fire alarms in addition to the minimum recommended by the NFPA.


## Areas Not Appropriate for Smoke Alarms




**Kitchens.** Do not install near kitchen appliances. Steam and by-products of cooking might cause nuisance alarms.

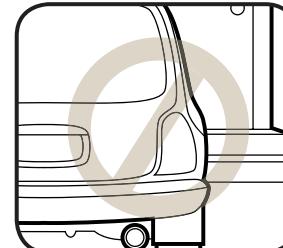


**Garages.** Do not install in garages. Exhaust gases from vehicles can trigger the smoke alarm.

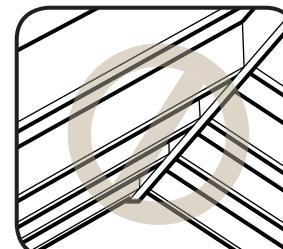

**Attics.** Do not install in attics. A smoke alarm can be affected by dust, small insects or high temperatures. Do not install the alarm in areas where the normal ambient temperature can exceed 100°F (38°C).

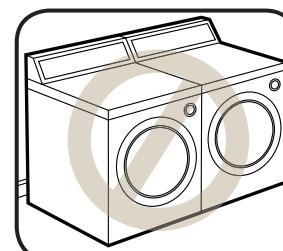


**Laundry Areas.** Do not install near laundry equipment. The low volume steam and gases produced by dryers and other equipment can trigger and/or damage the smoke alarm.

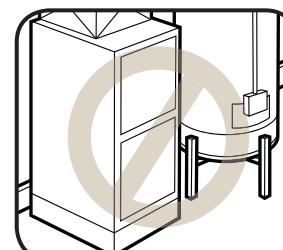


**Utility and Furnace Rooms.** Do not install. The steam and gases produced by mechanical equipment can trigger the smoke alarm.

## Choosing the Mounting Location in a Room

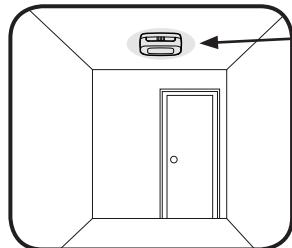

**BEST**

Center on ceiling.

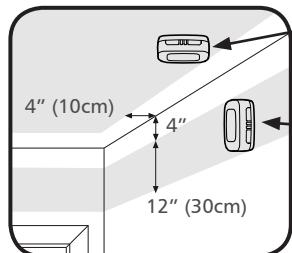


**ACCEPTABLE**

On ceiling, at least 4" (10cm) from intersection with wall.

**ACCEPTABLE**


On wall, at least 4" (10cm) from ceiling, and within 16" (41cm) of intersection with ceiling (if local codes permit wall mounting).

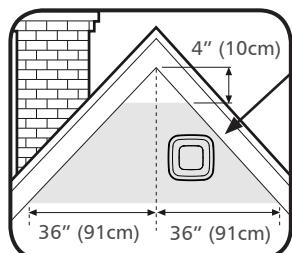

**ACCEPTABLE**


On peaked ceilings or roofs, mount at least 4" (10cm) from the upper corner, but high enough to allow a maximum of 36" (91cm) of horizontal air space as measured off the peak.

Do not mount Alarm between joists or rafters; mount on the exposed surface of the joist.

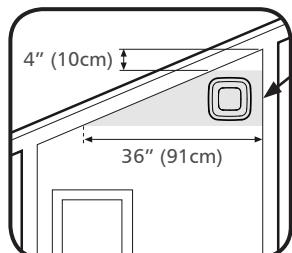

**ACCEPTABLE**

On sloped ceilings, at least 4" (10cm) from the upper corner, but high enough to allow a maximum of 36" (91cm) of horizontal air space as measured off the peak.

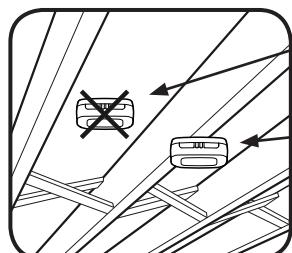

**NO!**


Do not install between joists or rafters.

**OK**


Install on exposed face of joist or rafter.

## Creating Your interLNX Network

The Homefront alarm communicates on its own private interLNX Network. This network is created simply by powering up new alarms one at a time.

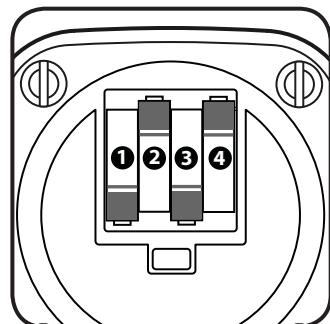


Install the 4 AA batteries into the first alarm.

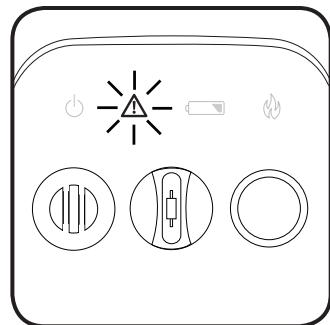

The WARNING light will begin to flash slowly.


While the WARNING light is flashing at this rate, additional alarms may be added to your network.

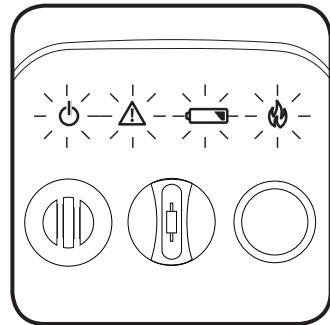

Add (4) AA batteries into your next alarm.

After a few seconds, the alarm will chirp twice and all four of the lighted icons will strobe on.

**This alarm has been added to your network!**

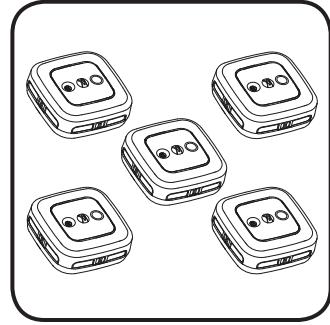


Continue adding batteries to each new alarm, one alarm at a time, until all alarms have been added to the network.

*One minute after adding the last batteries, the WARNING light will stop flashing on the original alarm, and it will join the network. The network is now closed.*


**General Note:** The interLNX network is limited to 18 total units. Only 12 of these units may be smoke alarms.

## Adding an Alarm to Your interLNX Network

In the event that an alarm must be added to the interLNX network after it has closed, the following steps must be taken to reopen the network.

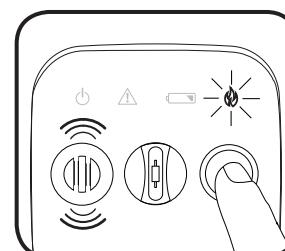


Select any alarm on the existing network. Press and hold the button on the front cover of the alarm. The FIRE light will flash rapidly and the alarm will sound three tones.

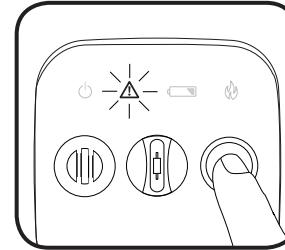


Continue holding the button down.


Next, the WARNING light will begin to flash. Count **5 flashes** of the WARNING light and release the button.

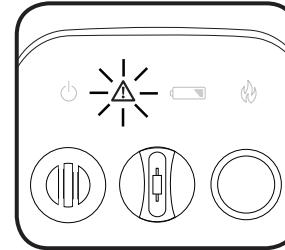

The WARNING light will now slowly pulse, signaling the network is again ready to receive alarms.

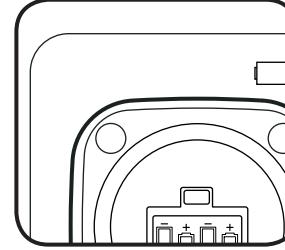

Add batteries to the new alarm being added to the network.

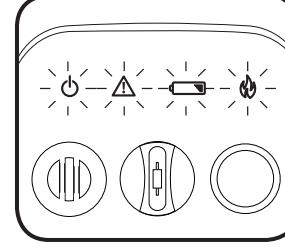


After a few seconds the alarm will chirp twice and all four of the lighted icons will strobe on.

**The alarm has been successfully added to your network!**

*After one minute, the WARNING light will stop flashing on the original alarm and the network will close.*


## Removing an Alarm from Your interLNX Network

In the event that an alarm must be removed from your interLNX network, the following steps must be taken.

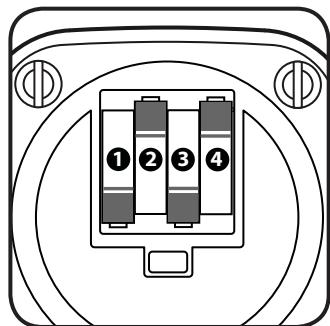


Reset the alarm by removing the (4) AA batteries and immediately re-installing them.

After a few seconds the alarm will chirp twice and all four of the lighted icons will strobe on.

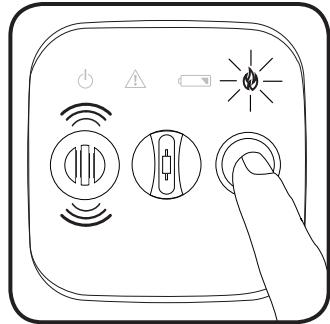


Press and hold the button on the front cover of the alarm. The FIRE light will flash rapidly and the alarm will sound three tones.

Continue holding the button down.

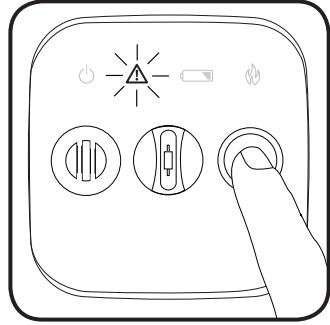

Next, the WARNING light will begin to flash. Count **10 flashes** of the WARNING light and release the button.

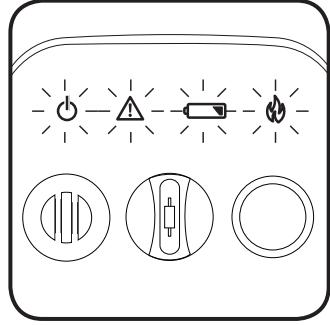

The alarm will chirp twice and all four of the lighted icons will strobe on.


**The alarm has been removed from the network.**

*After five minutes, the WARNING light will stop flashing and the alarm will function as a stand-alone unit.*

## How to Mount the Alarm (DC Type Only)


### 1 Mark

Place the mounting bracket against the ceiling or wall, and using the mounting bracket as a template, mark the top and bottom holes with a pencil.

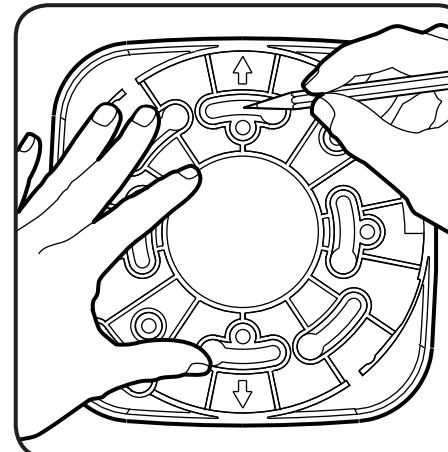

### 2 Drill


Using a 1/8" (3mm) drill bit, drill two pilot holes in the center of the two marked hole locations. This will determine if a wood beam or stud is present.

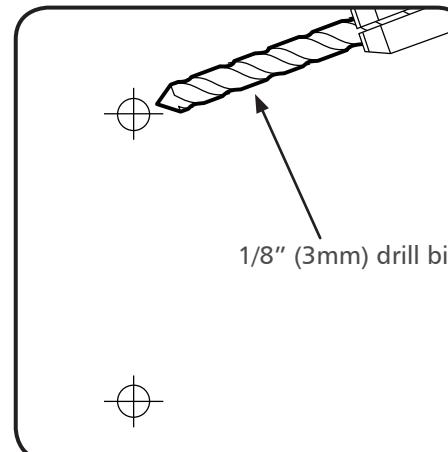




### 3 Fasten Bracket

#### Situation A: Wood

If wood is present behind the drywall, securely fasten the mounting bracket to the wall using the two 1" screws.

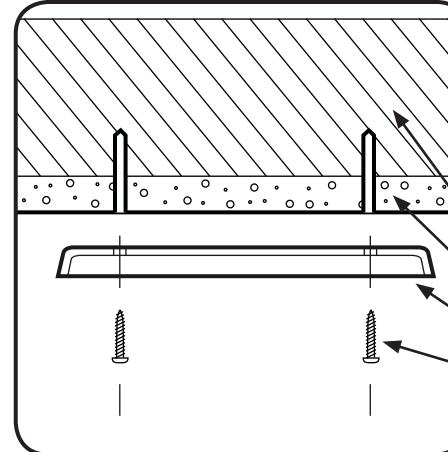

## How to Mount the Alarm (cont.)

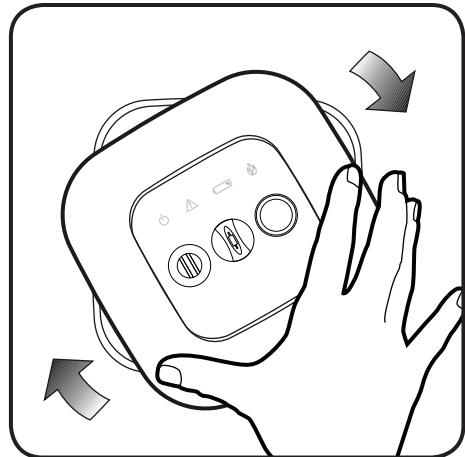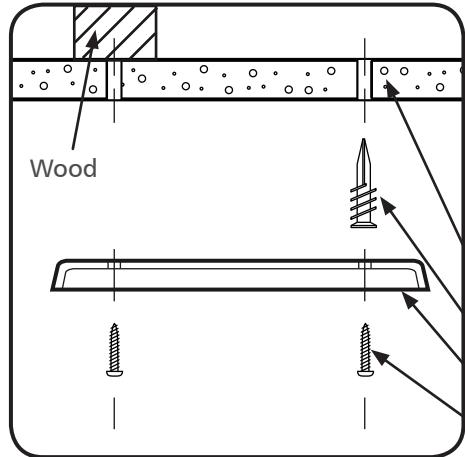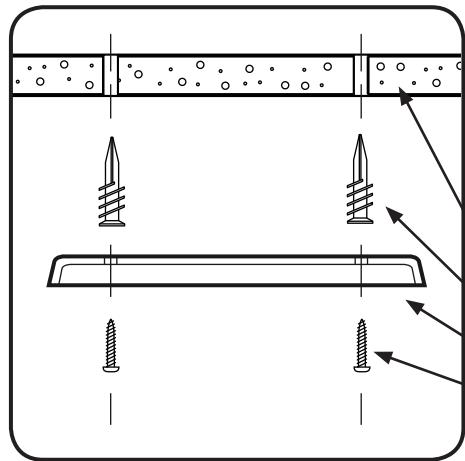

### Situation B: No Wood

If no wood is present, use a Phillips screwdriver to screw the two plastic wall anchors into the pre-drilled holes until fully seated. Then secure the mounting bracket to the wall anchors using the two 1" screws.

Drywall  
Plastic Anchors  
Mounting Bracket  
1" Screws

### Situation C: Combination

Where there is no wood present, first screw the plastic wall anchor into the pre-drilled hole using a Phillips screwdriver.

Then secure the mounting bracket in place using the two 1" screws.


Drywall  
Plastic Anchors  
Mounting Bracket  
1" Screws

### ④ Lock Into Place


With the batteries installed and wire harness connected (if AC powered) and with the alarms fully networked together, position the Smoke Alarm onto the center of the bracket and turn clockwise. The Alarm will lock into place.

## How to Wire and Mount the AC Powered Alarm

When installing an AC powered alarm (Model RF-360TEB), the mounting location is determined by the position of the electrical box that will power the alarm. **Electrical power to the box must be disconnected prior to alarm connection and installation!**

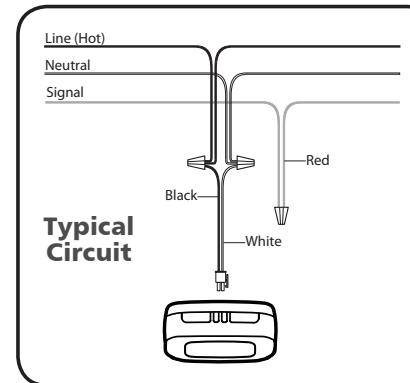


**With the AC power turned off**, connect the wire harness provided with the alarm.

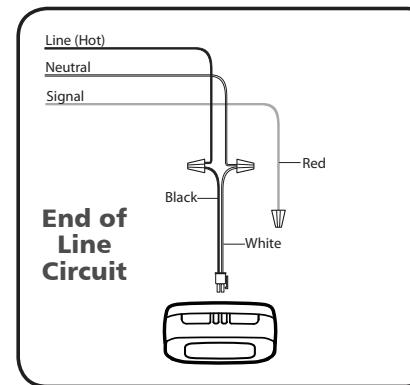

Connect the black wire of the harness to the black wire(s) in the electrical box (Hot).

Using the supplied orange wire nut, cap the red wire (not used) and push it back inside the electrical box.

Connect the white wire of the harness to the white wire(s) in the electrical box (Neutral).

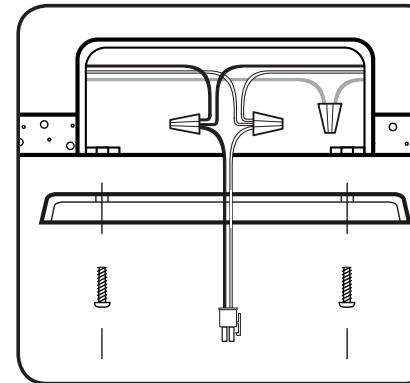

Align and attach the mounting bracket with the two screws of the electrical box. Pass the wire harness through the center of the bracket.


Plug the new wire harness into the back of the alarm.

Press and twist the alarm clockwise into place.

Reconnect power to the AC lines of the smoke alarm circuit. The POWER icon will glow continuously.


## Cleaning Your Alarm

Over time dust might collect inside your alarm, altering its performance. If this occurs, the WARNING icon will flash and the horn will chirp once per minute. To clean the alarm perform the following:

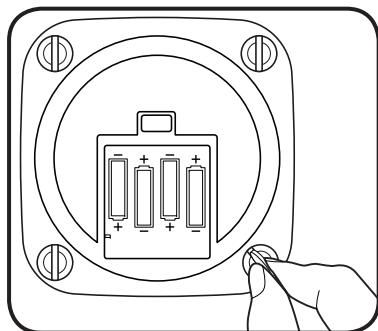


Remove the alarm from its bracket. With an AC powered alarm the wire harness must be disconnected.

Using a coin as a screwdriver, rotate the 4 corner slots on the back of the alarm counter-clockwise and carefully separate the two halves of the alarm.

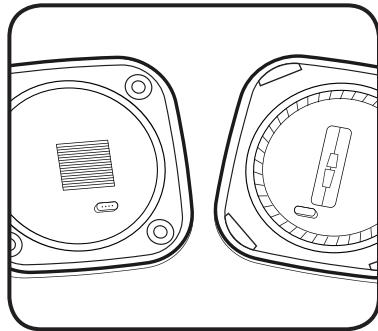

Vacuum all the surfaces carefully. Wipe with a clean cloth.

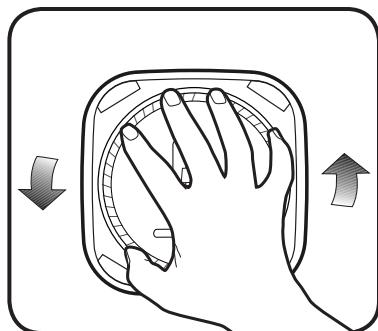

Twist the round bug shield counter-clockwise to remove.

The removed bug shield can be rinsed with water when removed from the alarm. Allow to air dry completely before reinstalling.

Reassemble the alarm. Rotate the 4 corner slots clockwise to tighten.

Install batteries

The WARNING icon should no longer flash. Re-install the alarm on the wall or ceiling.

If the WARNING icon flashing persists, return the alarm to the manufacturer.

## Important Fire Safety Information

Be prepared for fire emergencies:

### Plan Your Escape

- Draw a floor plan of your home.
- Show two ways out of each room.
- Discuss escape routes with everyone in your home.
- Agree on an outside meeting place where you'll gather after escaping.

### Be Prepared

- Familiarize every member of the household with the sound of the Smoke and Heat Alarms.
- Have everyone in the home memorize the fire department's emergency phone number.
- Instruct each person to call the emergency number from a neighbor's phone or a mobile phone used outside the home.
- Teach everyone to unlock and open all windows, and release security bars.
- Make sure security bars are equipped with quick-release devices.
- Keep exits clear and free from clutter.

### Practice!

- Hold home fire drills at least twice a year.

### Get Out and Stay Out

- Once you've escaped from a fire, do not go back inside for any reason.
- Make fire drills realistic by pretending some escape paths are blocked by smoke or fire.

### If you live in an apartment building

- Learn and practice your building's evacuation plan.
- If you hear a fire alarm, react immediately.
- Know the location of all building exits and fire alarm boxes.
- Use the stairs ... never use an elevator during a fire.
- If exits are locked or blocked, report the problem to your building's management.

### Escape Tips

- Close doors behind you as you escape to slow the spread of fire and smoke.
- If you have to escape through smoke, crawl on your hands and knees, keeping your head one to two feet above the floor, where the air will be clearest.
- Test the doorknob and spaces around the door with the back of your hand. If the door is warm, try another escape route. If the door is cool, open it slowly. Close it quickly if smoke pours through.

## Warning! Limitations of Smoke Alarms

Wireless smoke alarms have been proven to be both effective and reliable, but they may not be effective under all conditions. No alarm design can offer total protection of life and property. A smoke alarm is not a substitute for an adequate homeowner's fire insurance or life insurance policy.

Smoke alarms will not work without a source of power. The alarm will not operate and the alarm will not sound if the batteries have died or been removed. Or in the case of an AC powered alarm, the wiring has not been properly connected.

Radio communication between alarm units may fail to take place if significant changes to the home have occurred since installation and testing. Moving large objects such as a refrigerator or metal cabinet could impede alarm radio performance.

Alarm warning signal may not be heard. A deep sleeper, hearing-impaired person, young child or someone impaired by drugs or alcohol may not awaken in response to an alarm activation. This can occur even when an alarm is located inside the individual's bedroom. Be sure fire drills are practiced that take this possibility into account.

Smoke alarms may not always activate and provide early enough warning. A smoke alarm will only activate when it is maintained in working order and sufficient smoke reaches the unit. Certain fires can originate inside of walls, attics or on other side of closed doors. This may prevent smoke from reaching the alarm.

High and flame incendiary fires might block egress. Even with properly placed alarms, certain flaming fires might occur and grow so quickly as to block exit from the home.

**SMOKE ALARMS CAN NOT GUARANTEE THAT YOU WILL NEVER SUFFER ANY DAMAGE OR INJURY FROM A FIRE.**

# Alarm Specifications

## Operating Voltage

RF-360TB  
RF-360TEB

## Standby Current

RF-360TB  
RF-360TEB

## Alarm Current

RF-360TB  
RF-360TEB

## Battery Type

Sensitivity

## Operating Temperature

## Operating Humidity

## Alarm Dimensions

## Mounting Base Dimensions

## Weight

## Heat Sensing

Fixed Temperature  
Rate of Rise

## Listings

3VDC  
120VAC, 60 Hz

114uA  
2mA (AC)/560uA (backup battery)

60mA  
17mA/75mA

(4) 1.5v Energizer E91 Alkaline

1.0% to 3.0%

40 - 100°F

0 - 95% Non-condensing

5.1" x 5.1" x 2.7"

5.0" x 5.0"

1.2 lbs (with batteries)

135°F  
15°F / minute, > 100°F

UL; CSFM

## Limited Warranty Information

For a period of 24 months from the date of purchase, Applied Fire Technologies warrant to you, the original consumer purchaser, that your Smoke Alarm will be free from defects in workmanship, materials, and construction under normal use and service. If a defect in workmanship, materials, or construction should cause your Smoke Alarm to become inoperable within the warranty period, Applied Fire Technologies will repair your Smoke Alarm or furnish you with a new or rebuilt replacement Smoke Alarm without charge to you except for postage required to return the Smoke Alarm to us. Your repaired or replacement Smoke Alarm will be returned to you free of charge and it will be covered under this warranty for the balance of the warranty period.

This warranty is void if our inspection of your Smoke Alarm shows that the damage or failure was caused by abuse, misuse, abnormal usage, faulty installation, improper maintenance, or repairs other than those performed by us.

ANY WARRANTIES IMPLIED UNDER ANY STATE LAW, INCLUDING IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, APPLY ONLY FOR THE WARRANTY PERIOD SPECIFIED ABOVE. PLEASE NOTE THAT SOME STATES DO NOT ALLOW LIMITATIONS ON HOW LONG AN IMPLIED WARRANTY LASTS, SO THE ABOVE EXCLUSION MAY NOT APPLY TO YOU.

APPLIED FIRE TECHNOLOGIES WILL NOT BE LIABLE FOR ANY LOSS, DAMAGE, INCIDENTAL OR CONSEQUENTIAL DAMAGES OF ANY KIND ARISING IN CONNECTION WITH THE SALE, USE, OR REPAIR OF THIS SMOKE ALARM. PLEASE NOTE THAT SOME STATES DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES. SO THE ABOVE EXCLUSION MAY NOT APPLY TO YOU.

If a defect in workmanship, materials, or construction should cause your Smoke Alarm to become inoperable within the warranty period, you must return the Smoke Alarm to Applied Fire Technologies postage prepaid. You must also pack the Smoke Alarm to minimize the risk of it being damaged in transit. You must also enclose a return address. Smoke Alarms returned for warranty service should be sent to: Applied Fire Technologies, 801 Hammond Street, Suite 200, Coppell TX 75019.

If we receive a Smoke Alarm in a damaged condition as the result of shipping, we will notify you and you must file a claim with the Shipper.

THIS LIMITED WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS. YOU MAY ALSO HAVE OTHER RIGHTS WHICH VARY FROM STATE TO STATE.

THIS IS YOUR COPY OF OUR LIMITED WARRANTY. PLEASE RETAIN IT WITH PROOF OF DATE OF PURCHASE IN A SAFE PLACE.

## 25 Year Product Replacement Warranty

After the above Limited Warranty set forth in the User's Guide has expired, commencing in the 25th month and extending to the 324th month, Applied Fire Technologies guarantees to repair or replace your smoke alarm at a preferred customer discounted price which includes shipping and handling and is adjusted annually. The Product Replacement Warranty does not create any other obligations or liabilities of Applied Fire Technologies LLC.

This offer is extended only to the original purchaser and is available when the Alarm is sent to Applied Fire Technologies with a description of the problem and proof of purchase. This replacement offer is void if our inspection reveals that the damage or failure is a result of abuse, misuse, improper maintenance, abnormal usage or unauthorized repairs. At least an annual cleaning (according to the directions supplied in this owner's manual or [www.homefrontalarms.com](http://www.homefrontalarms.com)) is recommended to prolong the useful life of your Homefront smoke alarm.

Contact Applied Fire Technologies for current pricing, then forward your check and smoke alarm with postage prepaid to Applied Fire Technologies. Enclose your return address and daytime telephone number. Applied Fire Technologies will ship the new replacement unit upon receipt of the above requirements.

It should be noted that the National Fire Protection Association (N.F.P.A) which is the national independent regulatory body for the fire protection industry, currently recommends that electronic smoke alarms be replaced after 10 years of use. Therefore, any Applied Fire Technologies smoke alarm over 10 years old is replaceable at this special discounted price without inspection.

THIS PRODUCT REPLACEMENT POLICY SHALL HAVE NO EFFECT ON ANY WARRANTIES CONTAINED IN THE LIMITED WARRANTY. APPLIED FIRE TECHNOLOGIES DISCLAIMS ANY OTHER DUTIES, EXPRESSED OR IMPLIED, INCLUDING ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. REPLACEMENT AT THE DISCOUNTED PRICE IS THE SOLE REMEDY UNDER THIS POLICY AND APPLIED FIRE TECHNOLOGIES WILL NOT BE LIABLE FOR ANY LOSS, DAMAGE, INCIDENTAL OR CONSEQUENTIAL DAMAGES OF ANY KIND ARISING IN CONNECTION WITH THE SALE, USE OR REPLACEMENT OF THE SMOKE ALARM OR WITH RESPECT TO THIS PRODUCT REPLACEMENT POLICY. PLEASE NOTE THAT SOME STATES DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE EXCLUSION MAY NOT APPLY TO YOU.

THIS PRODUCT REPLACEMENT POLICY GIVES YOU SPECIFIC LEGAL RIGHTS. YOU MAY ALSO HAVE OTHER RIGHTS, WHICH VARY FROM STATE TO STATE.

## Lifetime Fire Replacement Warranty

Applied Fire Technologies will replace at no cost to the original owner any Homefront Smoke Alarm that has been damaged or destroyed by an accidental fire. Any unit(s) or part(s) thereof that are damaged or destroyed must be returned to Applied Fire Technologies within 90 days of the fire (unless otherwise dictated by state or local laws) accompanied by a complete activation report and verification report from the local fire department to qualify for this free replacement.

## Important Notice

These materials have been prepared by the Company for informational purposes only, are necessarily summary, and are not purported to serve as legal advice and should not be used as such. The Company makes no representations and warranties, express or implied, that these materials are complete and accurate, up to date, or in compliance with all relevant local, state and federal laws, regulations and rules. The materials do not address all legal considerations as there is inevitable uncertainty regarding interpretation of laws, regulations and rules and the applications of such laws, regulations and rules to particular fact patterns. Each person's activities can differently affect the obligations that exist under applicable laws, regulations or rules. Therefore, these materials should be used only for informational purposes and should not be used as a substitute for seeking professional legal advice. The Company will not be responsible for any action or failure to act in reliance upon the information contained in this material.

## FCC Compliance Statement

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning this equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

Reorient or relocate the receiving antenna.

Increase the separation between the equipment and receiver.

Connect the equipment into a different circuit from that to which the receiver is connected.

Consult the dealer or an experienced technician for help.

FCC Caution: Changes or modifications not expressly approved by Applied Fire Technology LLC could void the user's authority to operate the equipment.

IC Notice: This Class B digital apparatus complies with Canadian ICES-003 and RSS210. Operation is subject to the following two conditions:

1. This device may not cause interference and
2. This device must accept any interference, including interference that may cause undesired operation of the device.



APPLIED FIRE  
TECHNOLOGIES

801 Hammond Street, Suite 200  
Coppell, TX 75019  
972.393.1700

[www.homefrontalarms.com](http://www.homefrontalarms.com)

90-3021-10 A