



## Shenzhen Huaxia Testing Technology Co., Ltd

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

Telephone: +86-755-26648640  
Fax: +86-755-26648637  
Website: [www.cqa-cert.com](http://www.cqa-cert.com)

Report Template Version: V03  
Report Template Revision Date: Mar.1st, 2017

# Test Report

**Report No. :** CQASZ20201200044EX-01  
**Applicant:** Chervon(China)Trading Co.,Ltd  
**Address of Applicant:** No.99 Tianyuan West Road, Jiangning Economic & Technical Development Zone, nanjing, jiangsu, China  
**Manufacturer:** Chervon(China)Trading Co.,Ltd  
**Address of Manufacturer:** No.99 Tianyuan West Road, Jiangning Economic & Technical Development Zone, nanjing, jiangsu, China  
**Equipment Under Test (EUT):**  
**Product:** Jobsite Radio  
**All Model No.:** FX5351, 5957  
**Test Model No.:** FX5351  
**Brand Name:** Phoenix, FLEX  
**FCC ID:** YWKFX5351  
**Standards:** 47 CFR Part 15, Subpart C  
**Date of Test:** 2020-12-02 to 2020-12-16  
**Date of Issue:** 2021-3-24  
**Test Result :** **PASS\***

**Tested By:**

*Jun Li*

(Jun Li)

**Reviewed By:**

*Ares Liu*

(Ares Liu)

**Approved By:**

*Sheek Luo*

( Sheek luo)



\* In the configuration tested, the EUT complied with the standards specified above.

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CQA, this report can't be reproduced except in full.

## 1 Version

### Revision History Of Report

Report No.	Version	Description	Issue Date
CQASZ20201200044EX-01	Rev.01	Initial report	2021-3-24

## 2 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10 (2013)	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10 (2013)	PASS
Conducted Peak Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(1)	ANSI C63.10 (2013)	PASS
20dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2013)	PASS
Carrier Frequencies Separation	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2013)	PASS
Hopping Channel Number	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2013)	PASS
Dwell Time	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2013)	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15, Subpart C Section 15.247(b)(4)&TCB Exclusion List (7 July 2002)	ANSI C63.10 (2013)	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 (2013)	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 (2013)	PASS
Radiated Spurious emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 (2013)	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 (2013)	PASS

N/A: Not Applicable

### 3 Contents

	Page
<b>COVER PAGE.....</b>	<b>1</b>
<b>1 VERSION.....</b>	<b>2</b>
<b>2 TEST SUMMARY.....</b>	<b>3</b>
<b>3 CONTENTS.....</b>	<b>4</b>
<b>4 GENERAL INFORMATION.....</b>	<b>5</b>
4.1 CLIENT INFORMATION.....	5
4.2 GENERAL DESCRIPTION OF EUT.....	5
4.3 ADDITIONAL INSTRUCTIONS.....	7
4.4 TEST ENVIRONMENT.....	8
4.5 DESCRIPTION OF SUPPORT UNITS.....	8
4.6 STATEMENT OF THE MEASUREMENT UNCERTAINTY.....	9
4.7 TEST LOCATION.....	10
4.8 TEST FACILITY.....	10
4.9 ABNORMALITIES FROM STANDARD CONDITIONS.....	10
4.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	10
4.11 EQUIPMENT LIST.....	11
<b>5 TEST RESULTS AND MEASUREMENT DATA.....</b>	<b>12</b>
5.1 ANTENNA REQUIREMENT.....	12
5.2 CONDUCTED EMISSIONS.....	13
5.3 CONDUCTED PEAK OUTPUT POWER.....	17
5.4 20dB OCCUPY BANDWIDTH.....	21
5.5 CARRIER FREQUENCIES SEPARATION.....	24
5.6 HOPPING CHANNEL NUMBER.....	28
5.7 DWELL TIME.....	30
5.8 BAND-EDGE FOR RF CONDUCTED EMISSIONS.....	38
5.9 SPURIOUS RF CONDUCTED EMISSIONS.....	42
5.10 OTHER REQUIREMENTS FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM.....	50
5.11 RADIATED SPURIOUS EMISSION & RESTRICTED BANDS.....	52
5.11.1 Radiated Emission below 1GHz.....	55
5.11.2 Transmitter Emission above 1GHz.....	59
<b>6 PHOTOGRAPHS - EUT TEST SETUP.....</b>	<b>61</b>
<b>7 PHOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS.....</b>	<b>63</b>

## 4 General Information

### 4.1 Client Information

Applicant:	Chervon(China)Trading Co.,Ltd
Address of Applicant:	No.99 Tianyuan West Road, Jiangning Economic & Technical Development Zone, nanjing, jiangsu, China
Manufacturer:	Chervon(China)Trading Co.,Ltd
Address of Manufacturer:	No.99 Tianyuan West Road, Jiangning Economic & Technical Development Zone, nanjing, jiangsu, China

### 4.2 General Description of EUT

Product Name:	Jobsite Radio
All Model No.:	FX5351, 5957
Test Model No.:	FX5351
Trade Mark:	Phoenix, FLEX
Hardware Version:	V1.0
Software Version:	V1.5
Operation Frequency:	2402MHz~2480MHz
Bluetooth Version:	EDR
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)
Modulation Type:	GFSK, $\pi/4$ DQPSK
Transfer Rate:	1Mbps/2Mbps
Number of Channel:	79
Hopping Channel Type:	Adaptive Frequency Hopping systems
Product Type:	<input type="checkbox"/> Mobile <input type="checkbox"/> Portable <input checked="" type="checkbox"/> Fix Location
Test Software of EUT:	FCC Assist 1.5
Antenna Type:	PCB antenna
Antenna Gain:	0dBi
Power Supply:	DC24V 1A

Note:

All model: FX5351, 5957

Only the model FX5351 was tested, since the electrical circuit design, layout, components used and internal wiring were identical for the above models, with difference being model name.

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	20	2422MHz	40	2442MHz	60	2462MHz
1	2403MHz	21	2423MHz	41	2443MHz	61	2463MHz
2	2404MHz	22	2424MHz	42	2444MHz	62	2464MHz
3	2405MHz	23	2425MHz	43	2445MHz	63	2465MHz
4	2406MHz	24	2426MHz	44	2446MHz	64	2466MHz
5	2407MHz	25	2427MHz	45	2447MHz	65	2467MHz
6	2408MHz	26	2428MHz	46	2448MHz	66	2468MHz
7	2409MHz	27	2429MHz	47	2449MHz	67	2469MHz
8	2410MHz	28	2430MHz	48	2450MHz	68	2470MHz
9	2411MHz	29	2431MHz	49	2451MHz	69	2471MHz
10	2412MHz	30	2432MHz	50	2452MHz	70	2472MHz
11	2413MHz	31	2433MHz	51	2453MHz	71	2473MHz
12	2414MHz	32	2434MHz	52	2454MHz	72	2474MHz
13	2415MHz	33	2435MHz	53	2455MHz	73	2475MHz
14	2416MHz	34	2436MHz	54	2456MHz	74	2476MHz
15	2417MHz	35	2437MHz	55	2457MHz	75	2477MHz
16	2418MHz	36	2438MHz	56	2458MHz	76	2478MHz
17	2419MHz	37	2439MHz	57	2459MHz	77	2479MHz
18	2420MHz	38	2440MHz	58	2460MHz	78	2480MHz
19	2421MHz	39	2441MHz	59	2461MHz		

Note:


In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The Lowest channel	2402MHz
The Middle channel	2441MHz
The Highest channel	2480MHz

### 4.3 Additional Instructions

EUT Test Software Settings:		
Mode:	<input checked="" type="checkbox"/> Special software is used. <input type="checkbox"/> Through engineering command into the engineering mode.	
EUT Power level:	Class2 (Power level is built-in set parameters and cannot be changed and selected)	
Use test software to set the lowest frequency, the middle frequency and the highest frequency keep transmitting of the EUT.		
Mode	Channel	Frequency(MHz)
DH1/DH3/DH5	CH0	2402
	CH39	2441
	CH78	2480
2DH1/2DH3/2DH5	CH0	2402
	CH39	2441
	CH78	2480

#### Run Software:

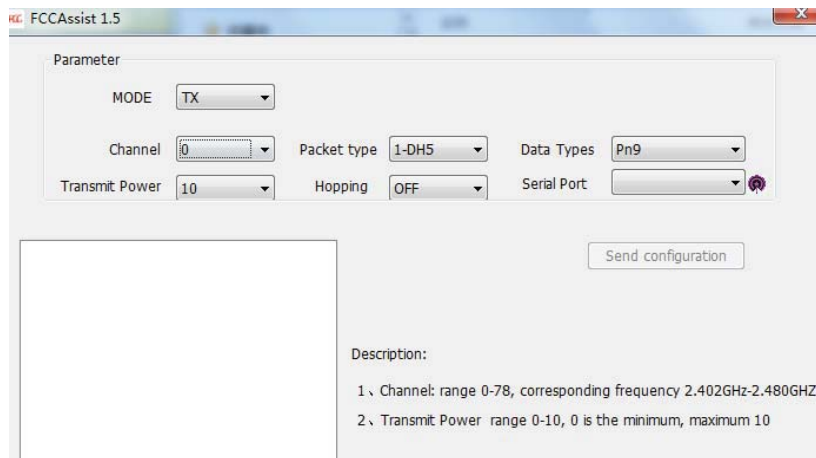

#### 4.4 Test Environment

Operating Environment:	
Temperature:	25.0 °C
Humidity:	53 % RH
Atmospheric Pressure:	995mbar
Test Mode:	Use test software to set the lowest frequency, the middle frequency and the highest frequency keep transmitting of the EUT.

#### 4.5 Description of Support Units

The EUT has been tested with associated equipment below.

Description	Manufacturer	Model No.	Remark	FCC certification
AC-DC Adapter	shenzhenMin gxin Power technology Co.,Ltd	MODEL: MX24W1-2401000U INPUT:100-240 50/60Hz 0.7A OUTPUT:24V 1A	Provided by applicant	SDOC



#### 4.6 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate.

The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities.

The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the **Shenzhen Huaxia Testing Technology Co., Ltd.** quality system acc. to DIN EN ISO/IEC 17025.

Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CQA laboratory is reported:

No.	Item	Uncertainty	Notes
1	Radiated Emission (Below 1GHz)	±5.12dB	(1)
2	Radiated Emission (Above 1GHz)	±4.60dB	(1)
3	Conducted Disturbance (0.15~30MHz)	±3.34dB	(1)
4	Radio Frequency	$3 \times 10^{-8}$	(1)
5	Duty cycle	0.6 %.	(1)
6	Occupied Bandwidth	1.1%	(1)
7	RF conducted power	0.86dB	(1)
8	RF power density	0.74	(1)
9	Conducted Spurious emissions	0.86dB	(1)
10	Temperature test	0.8°C	(1)
11	Humidity test	2.0%	(1)
12	Supply voltages	0.5 %.	(1)
13	time	0.6 %.	(1)
14	Frequency Error	5.5 Hz	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

#### 4.7 Test Location

**Shenzhen Huaxia Testing Technology Co., Ltd,**

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

#### 4.8 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

**IC Registration No.: 22984-1**

The 3m Semi-anechoic chamber of Shenzhen Huaxia Testing Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing

The test facility is recognized, certified, or accredited by the following organizations:

• **A2LA (Certificate No. 4742.01)**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4742.01.

• **FCC Registration No.: 522263**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.:522263

#### 4.9 Abnormalities from Standard Conditions

None.

#### 4.10 Other Information Requested by the Customer

None.

## 4.11 Equipment List


Test Equipment	Manufacturer	Model No.	Instrument No.	Calibration Date	Calibration Due Date
EMI Test Receiver	R&S	ESR7	CQA-005	2020/10/25	2021/10/24
Spectrum analyzer	R&S	FSU26	CQA-038	2020/10/25	2021/10/24
EXA spectrum analyzer	Keysight	N9010A	CQA-106	2020/9/26	2021/9/25
Preamplifier	MITEQ	AMF-6D-02001800-29-20P	CQA-036	2020/10/25	2021/10/24
Loop antenna	Schwarzbeck	FMZB1516	CQA-060	2020/10/21	2021/10/20
Bilog Antenna	R&S	HL562	CQA-011	2020/9/26	2021/9/25
Horn Antenna	R&S	HF906	CQA-012	2020/9/26	2021/9/25
Horn Antenna	Schwarzbeck	BBHA 9170	CQA-088	2020/9/25	2021/9/24
Coaxial Cable (Above 1GHz)	CQA	N/A	C007	2020/9/26	2021/9/25
Coaxial Cable (Below 1GHz)	CQA	N/A	C013	2020/9/26	2021/9/25
Antenna Connector	CQA	RFC-01	CQA-080	2020/9/26	2021/9/25
RF cable(9KHz~40GHz)	CQA	RF-01	CQA-079	2020/9/26	2021/9/25
Power divider	MIDWEST	PWD-2533-02-SMA-79	CQA-067	2020/9/26	2021/9/25
EMI Test Receiver	R&S	ESR7	CQA-005	2020/10/25	2021/10/24
LISN	R&S	ENV216	CQA-003	2020/10/23	2021/10/22
Coaxial cable	CQA	N/A	CQA-C009	2020/9/26	2021/9/25

Note:

The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.


## 5 Test results and Measurement Data

### 5.1 Antenna Requirement

<b>Standard requirement:</b>	47 CFR Part 15C Section 15.203 /247(c)
<p>15.203 requirement:          An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>15.247(b) (4) requirement:          The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p>	
<b>EUT Antenna:</b>	<p>PCB ANT</p> 
<p>The antenna is integral antenna. The best case gain of the antenna is 0dBi.</p>	

## 5.2 Conducted Emissions


Test Requirement:	47 CFR Part 15C Section 15.207		
Test Method:	ANSI C63.10: 2013		
Test Frequency Range:	150kHz to 30MHz		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
* Decreases with the logarithm of the frequency.			
Test Procedure:	<ol style="list-style-type: none"> <li>1) The mains terminal disturbance voltage test was conducted in a shielded room.</li> <li>2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.</li> <li>3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,</li> <li>4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.</li> <li>5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.</li> </ol>		
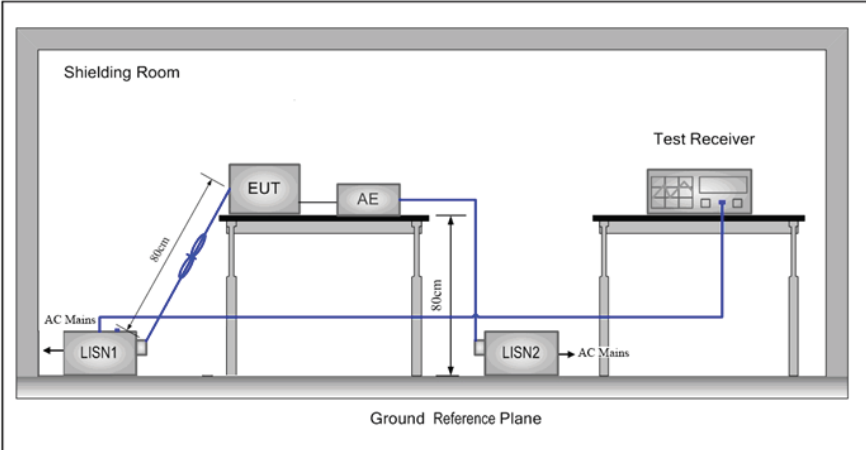
<p>Test Setup:</p>	
<p>Exploratory Test Mode:</p>	<p>Non-hopping transmitting mode with all kind of modulation and all kind of data type at the lowest, middle, high channel.</p>
<p>Final Test Mode:</p>	<p>Through Pre-scan, find the 2DH5 of data type and <math>\pi/4</math> DQPSK modulation at the lowest channel is the worst case. Only the worst case is recorded in the report.</p>
<p>Test Voltage:</p>	<p>AC 120V/60Hz</p>
<p>Test Results:</p>	<p>Pass</p>

**Measurement Data**

Live line:

80.0 dBuV

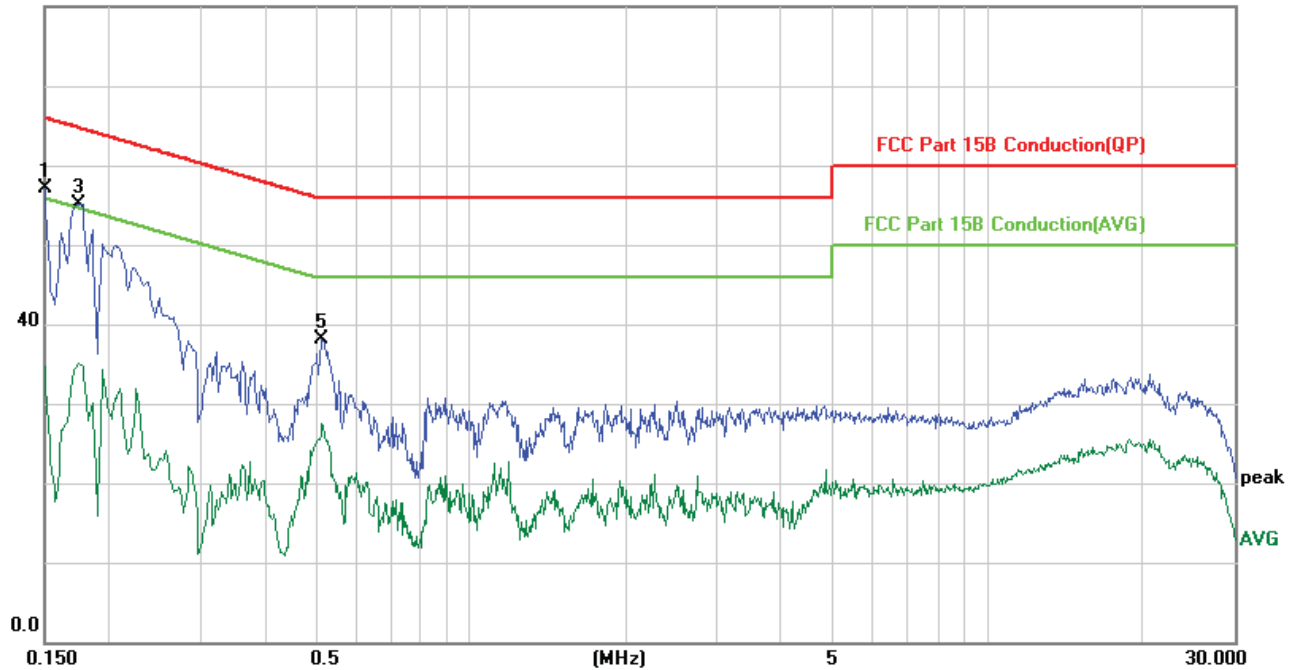


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1	*	0.1500	56.84	0.17	57.01	65.99	-8.98	peak	
2		0.1500	34.53	0.17	34.70	55.99	-21.29	AVG	
3		0.1740	55.00	0.19	55.19	64.76	-9.57	peak	
4		0.1740	34.97	0.19	35.16	54.76	-19.60	AVG	
5		0.5180	37.77	0.32	38.09	56.00	-17.91	peak	
6		0.5180	27.12	0.32	27.44	46.00	-18.56	AVG	

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

Neutral line:

80.0 dBuV

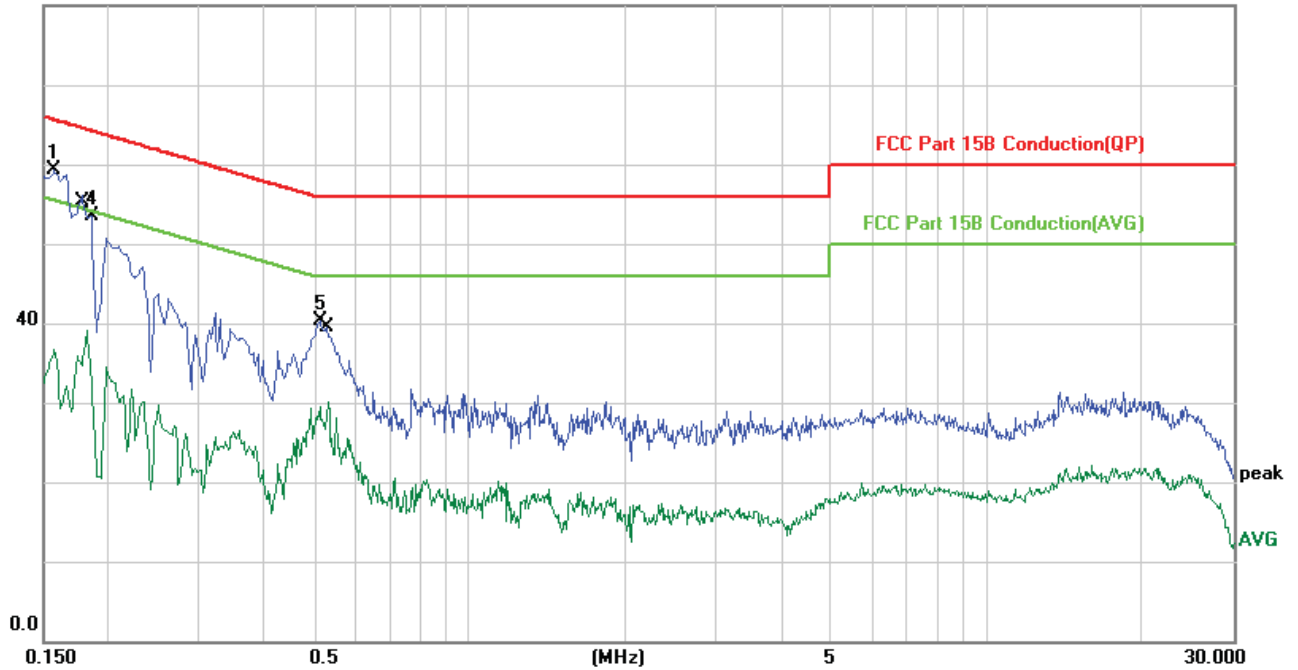


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1580	59.03	0.18	59.21	65.56	-6.35	peak	
2		0.1580	36.54	0.18	36.72	55.56	-18.84	AVG	
3		0.1819	38.96	0.19	39.15	54.39	-15.24	AVG	
4		0.1860	53.27	0.19	53.46	64.21	-10.75	peak	
5		0.5140	39.98	0.32	40.30	56.00	-15.70	peak	
6		0.5340	29.82	0.32	30.14	46.00	-15.86	AVG	

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.



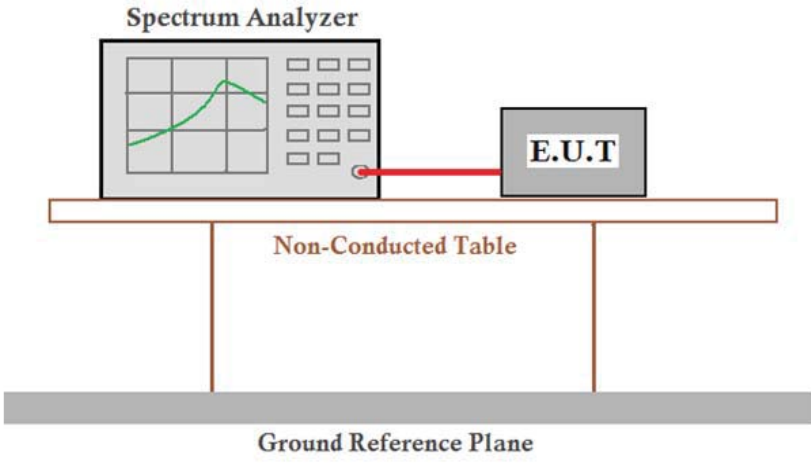


### 5.3 Conducted Peak Output Power




Test Requirement:	47 CFR Part 15C Section 15.247 (b)(1)
Test Method:	ANSI C63.10:2013
Test Setup:	 <p style="text-align: center;"><i>Remark: Offset=Cable loss+ attenuation factor.</i></p>
Limit:	21dBm
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of $\pi/4$ DQPSK modulation type. Only the worst case is recorded in the report.
Test Results:	Pass

Measurement Data


GFSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	-2.237	30.00	Pass
Middle	-2.372	30.00	Pass
Highest	-2.369	30.00	Pass
$\pi/4$ DQPSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	-0.306	30.00	Pass
Middle	1.709	30.00	Pass
Highest	1.634	30.00	Pass

Test plot as follows:

Graphs	
GFSK/LCH	
GFSK/MCH	
GFSK/HCH	

<p><math>\pi/4</math>DQPSK/LCH</p>	
<p><math>\pi/4</math>DQPSK/MCH</p>	
<p><math>\pi/4</math>DQPSK/HCH</p>	

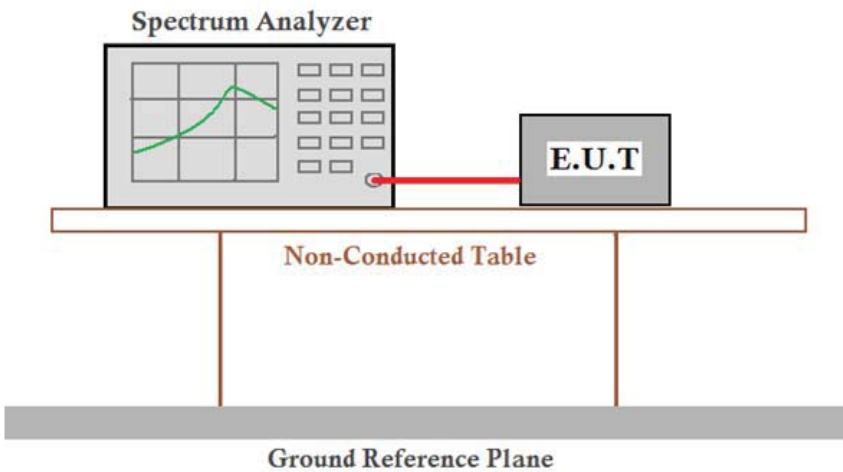


## 5.4 20dB Occupy Bandwidth

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Test Setup:	 <p>Remark: Offset=Cable loss+ attenuation factor.</p>
Limit:	NA
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of $\pi/4$ DQPSK modulation type Only the worst case is recorded in the report.
Test Results:	Pass

### Measurement Data


Test channel	20dB Occupy Bandwidth (MHz)		
	GFSK	$\pi/4$ DQPSK	/
Lowest	0.9501	1.351	/
Middle	0.9505	1.351	/
Highest	0.9509	1.354	/

Test plot as follows:

Graphs	
GFSK/LCH	 <p>Key parameters for GFSK/LCH:</p> <ul style="list-style-type: none"> <li>Center Freq: 2.40200000 GHz</li> <li>Occupied Bandwidth: 894.60 kHz</li> <li>Total Power: 5.29 dBm</li> <li>Transmit Freq Error: 16.117 kHz</li> <li>x dB Bandwidth: 950.1 kHz</li> </ul>
GFSK/MCH	 <p>Key parameters for GFSK/MCH:</p> <ul style="list-style-type: none"> <li>Center Freq: 2.44100000 GHz</li> <li>Occupied Bandwidth: 892.16 kHz</li> <li>Total Power: 3.76 dBm</li> <li>Transmit Freq Error: 15.250 kHz</li> <li>x dB Bandwidth: 950.5 kHz</li> </ul>
GFSK/HCH	 <p>Key parameters for GFSK/HCH:</p> <ul style="list-style-type: none"> <li>Center Freq: 2.48000000 GHz</li> <li>Occupied Bandwidth: 897.64 kHz</li> <li>Total Power: 3.68 dBm</li> <li>Transmit Freq Error: 14.547 kHz</li> <li>x dB Bandwidth: 950.9 kHz</li> </ul>

<p><math>\pi/4</math>DQPSK/LCH</p>	 <p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.40200000 GHz</p> <p>Occupied Bandwidth: 1.1972 MHz</p> <p>Total Power: 3.77 dBm</p> <p>Transmit Freq Error: 14.252 kHz</p> <p>x dB Bandwidth: 1.351 MHz</p> <p>% of OBW Power: 99.00 %</p> <p>x dB: -20.00 dB</p>
<p><math>\pi/4</math>DQPSK/MCH</p>	 <p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.441000000 GHz</p> <p>Occupied Bandwidth: 1.1978 MHz</p> <p>Total Power: 5.75 dBm</p> <p>Transmit Freq Error: 17.057 kHz</p> <p>x dB Bandwidth: 1.351 MHz</p> <p>% of OBW Power: 99.00 %</p> <p>x dB: -20.00 dB</p>
<p><math>\pi/4</math>DQPSK/HCH</p>	 <p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.480000000 GHz</p> <p>Occupied Bandwidth: 1.1985 MHz</p> <p>Total Power: 5.65 dBm</p> <p>Transmit Freq Error: 16.143 kHz</p> <p>x dB Bandwidth: 1.354 MHz</p> <p>% of OBW Power: 99.00 %</p> <p>x dB: -20.00 dB</p>


### 5.5 Carrier Frequencies Separation



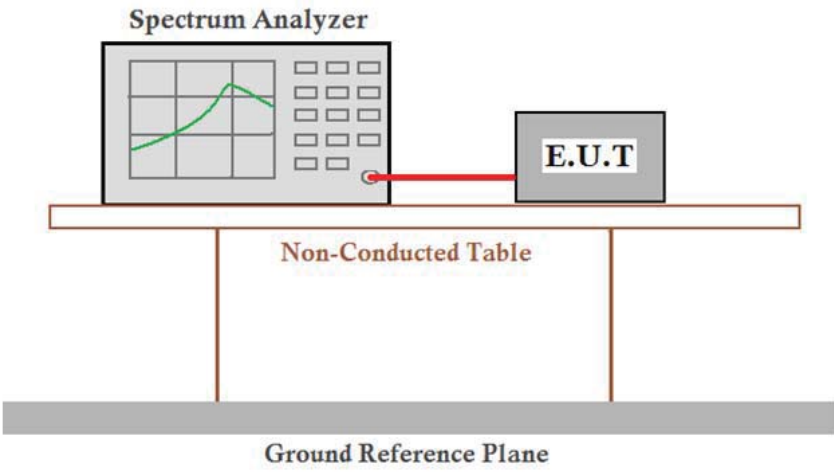
Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Test Setup:	 <p>Remark: Offset=Cable loss+ attenuation factor.</p>
Limit:	2/3 of the 20dB bandwidth
	Remark: the transmission power is less than 0.125W.
Exploratory Test Mode:	Hopping transmitting with all kind of modulation and all kind of data type
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of $\pi/4$ DQPSK modulation type Only the worst case is recorded in the report.
Test Results:	Pass




Modulation	Channel	Channel Separation (MHz)	Limit(MHz)	Result
GFSK	CH00	0.996	25KHz or 2/3*20dB bandwidth	Pass
	CH01			
	CH39	0.999		
	CH40			
	CH77	1.006		
	CH78			
pi/4DQPSK	CH00	1.001	25KHz or 2/3*20dB bandwidth	Pass
	CH01			
	CH39	0.999		
	CH40			
	CH77	0.999		
	CH78			

Test plot as follows:

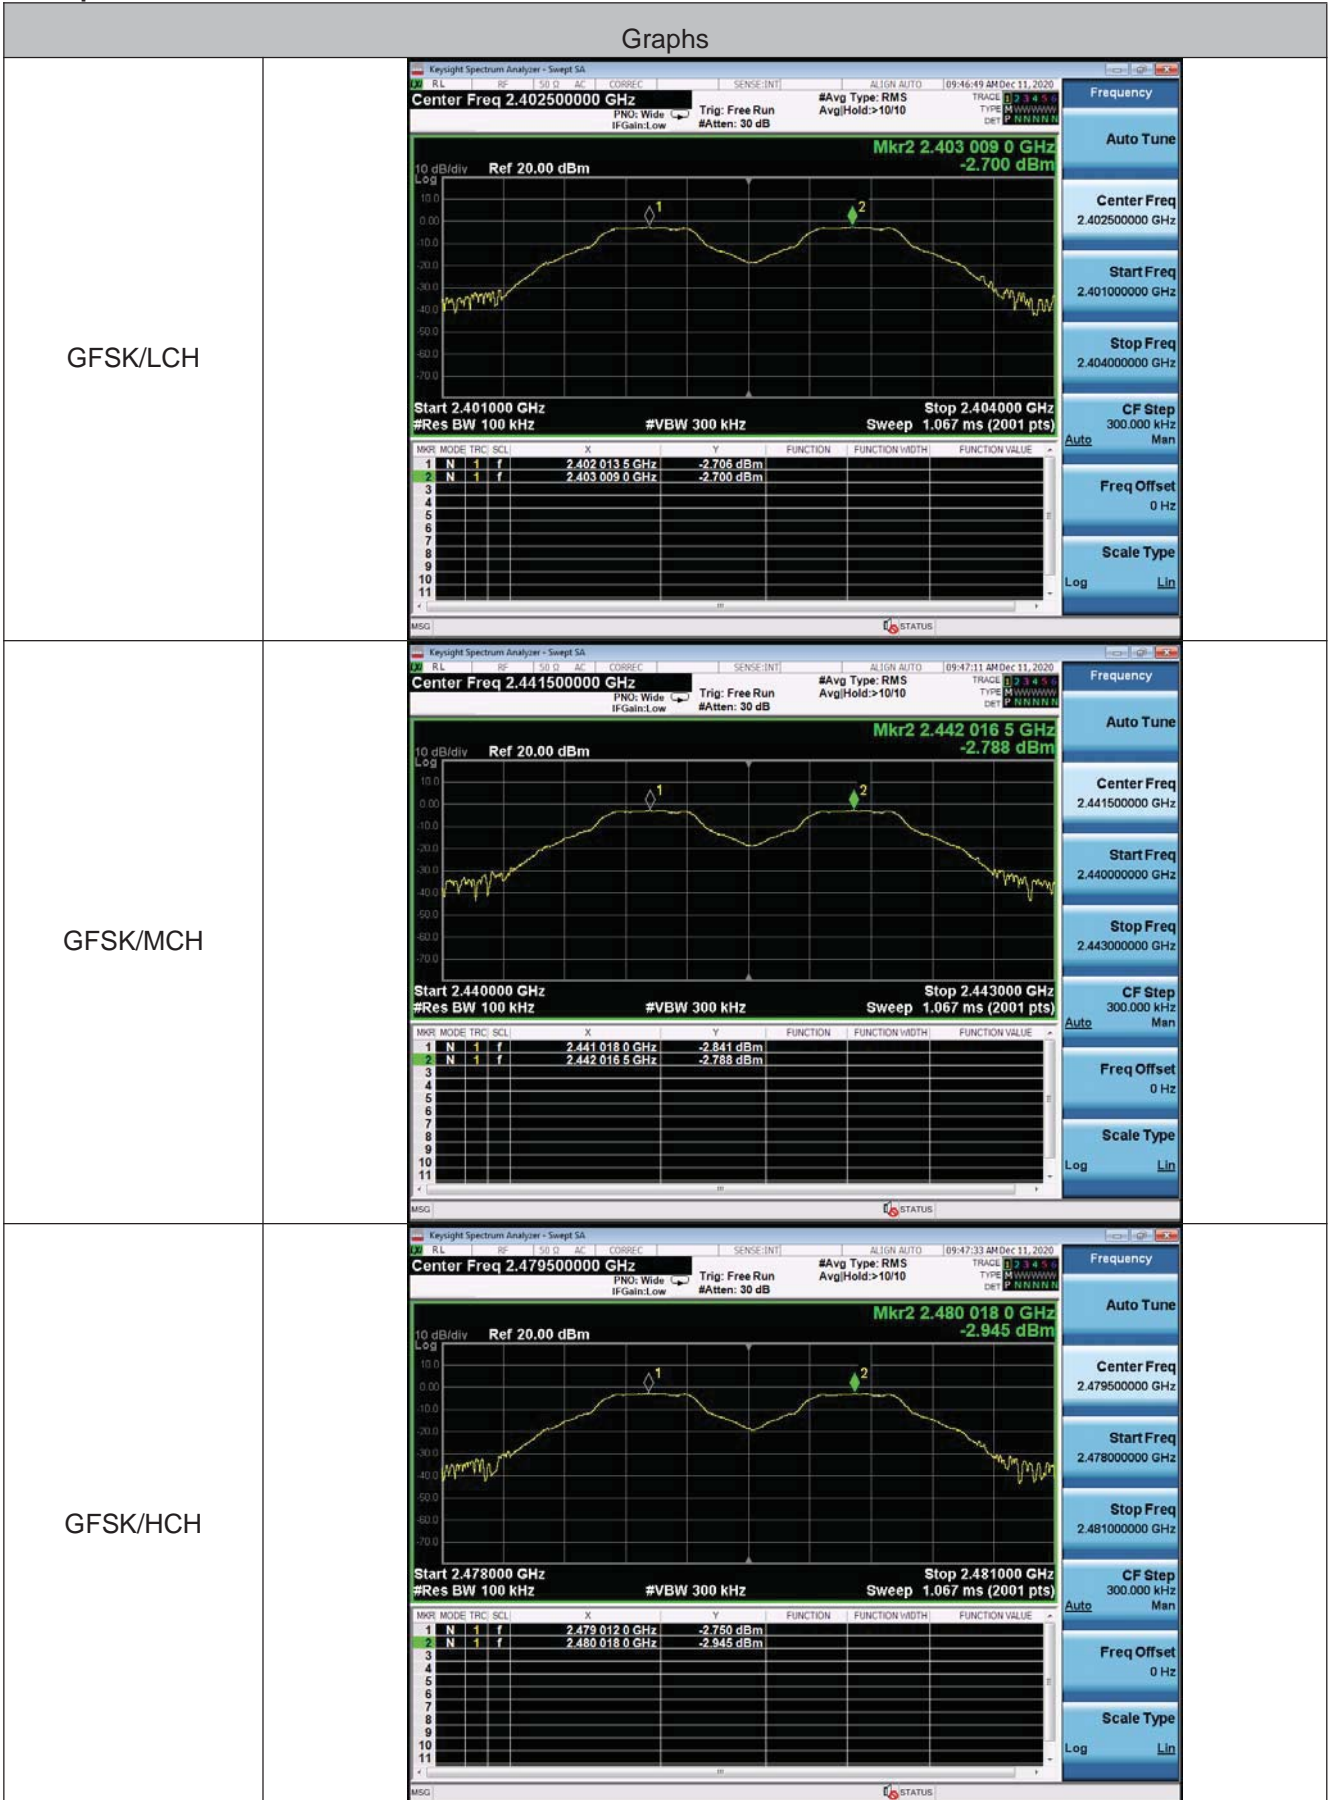
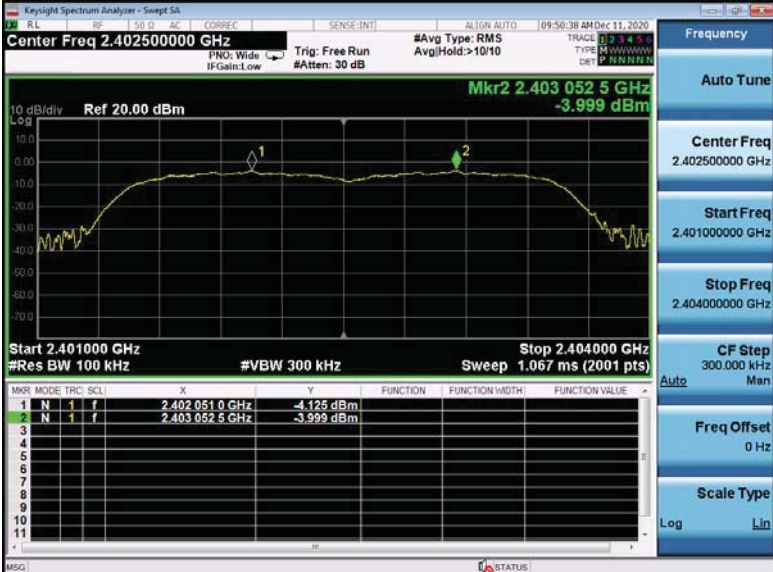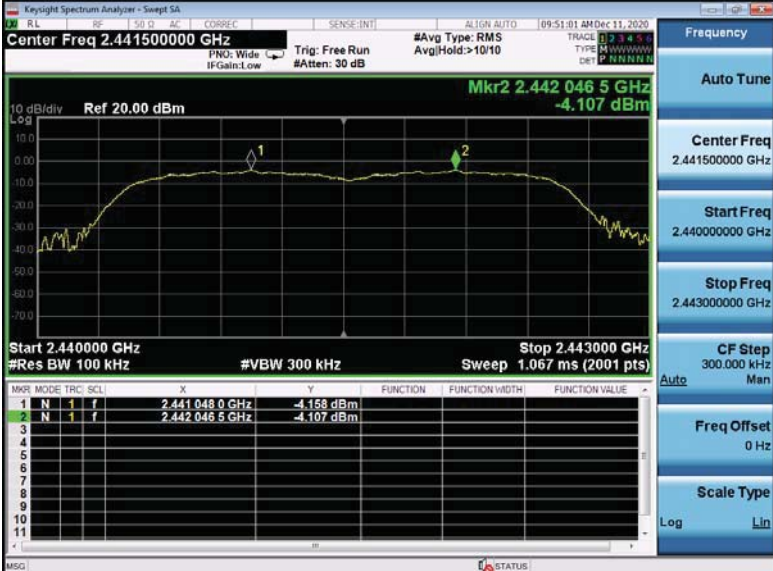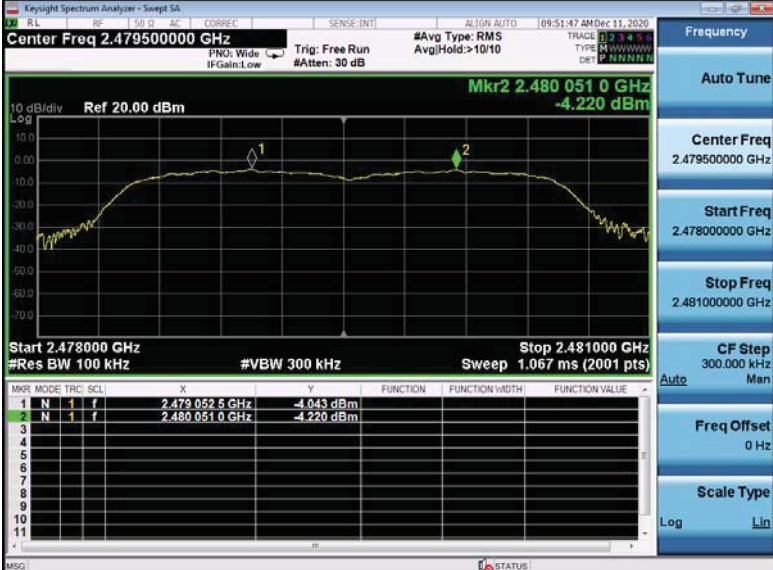
<p><math>\pi/4</math>DQPSK/LCH</p>	 <p>Center Freq 2.40250000 GHz</p> <p>Mkr2 2.403 052 5 GHz -3.999 dBm</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.402 051 0 GHz</td> <td>-4.125 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.403 052 5 GHz</td> <td>-3.999 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.402 051 0 GHz	-4.125 dBm				2	N	1	f	2.403 052 5 GHz	-3.999 dBm			
MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	1	f	2.402 051 0 GHz	-4.125 dBm																							
2	N	1	f	2.403 052 5 GHz	-3.999 dBm																							
<p><math>\pi/4</math>DQPSK/MCH</p>	 <p>Center Freq 2.44150000 GHz</p> <p>Mkr2 2.442 046 5 GHz -4.107 dBm</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.441 048 0 GHz</td> <td>-4.158 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.442 046 5 GHz</td> <td>-4.107 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.441 048 0 GHz	-4.158 dBm				2	N	1	f	2.442 046 5 GHz	-4.107 dBm			
MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	1	f	2.441 048 0 GHz	-4.158 dBm																							
2	N	1	f	2.442 046 5 GHz	-4.107 dBm																							
<p><math>\pi/4</math>DQPSK/HCH</p>	 <p>Center Freq 2.47950000 GHz</p> <p>Mkr2 2.480 051 0 GHz -4.220 dBm</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.479 052 5 GHz</td> <td>-4.043 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.480 051 0 GHz</td> <td>-4.220 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.479 052 5 GHz	-4.043 dBm				2	N	1	f	2.480 051 0 GHz	-4.220 dBm			
MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	1	f	2.479 052 5 GHz	-4.043 dBm																							
2	N	1	f	2.480 051 0 GHz	-4.220 dBm																							


### 5.6 Hopping Channel Number

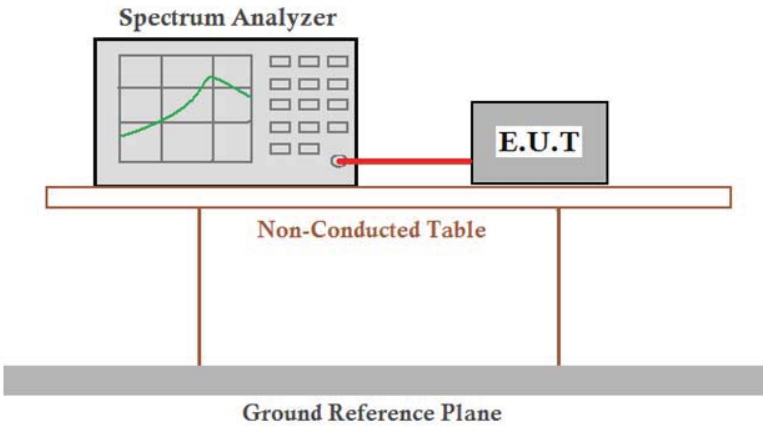Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Test Setup:	 <p style="text-align: center;"><i>Remark: Offset=Cable loss+ attenuation factor.</i></p>
Limit:	At least 15 channels
Exploratory Test Mode:	hopping transmitting with all kind of modulation and all kind of data type
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of $\pi/4$ DQPSK modulation type Only the worst case is recorded in the report.
Test Results:	Pass


#### Measurement Data

Mode	Hopping channel numbers	Limit
GFSK	79	$\geq 15$
$\pi/4$ DQPSK	79	$\geq 15$

Test plot as follows:

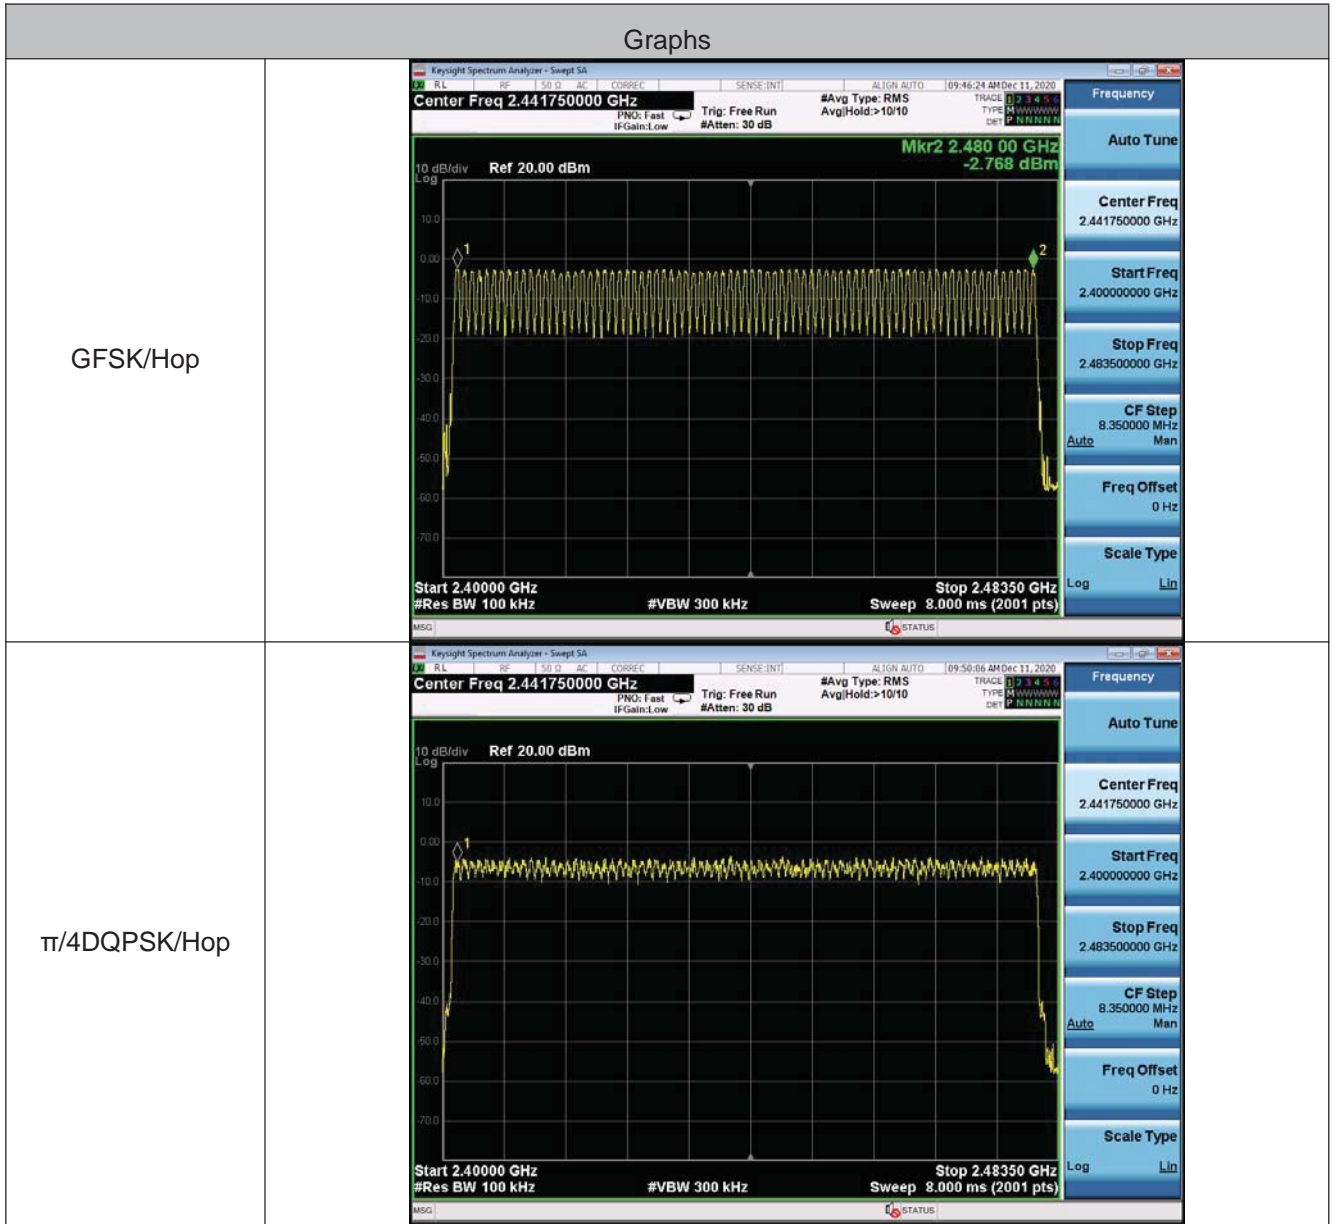

### 5.7 Dwell Time

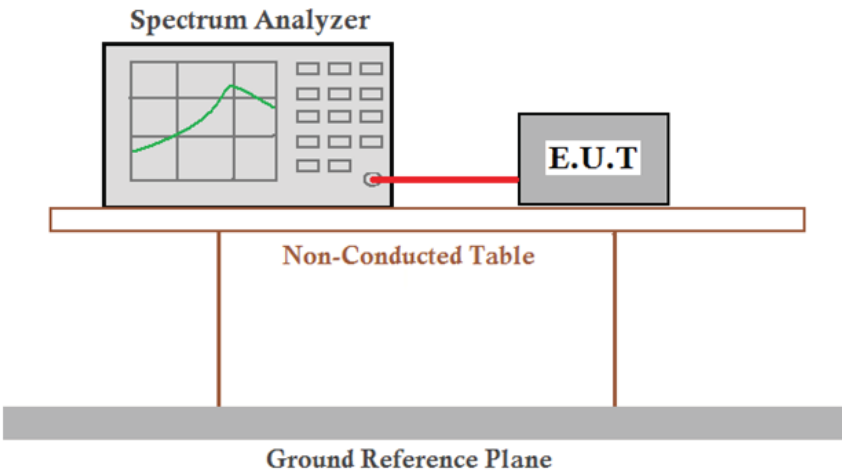Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Test Setup:	 <p style="text-align: center;"><b>Spectrum Analyzer</b></p> <p style="text-align: center;"><b>E.U.T</b></p> <p style="text-align: center;"><b>Non-Conducted Table</b></p> <p style="text-align: center;"><b>Ground Reference Plane</b></p> <p><i>Remark: Offset=Cable loss+ attenuation factor.</i></p>
Test Mode:	Hopping transmitting with all kind of modulation and all kind of data type.
Limit:	0.4 Second
Test Results:	Pass

Measurement Data

Mode	Packet	Channel	Burst Width [ms/hop/ch]	Dwell Time[ms]	Limit (second)
GFSK	DH1	LCH	0.3846	123.072	≤0.4
GFSK	DH1	MCH	0.3843	122.976	≤0.4
GFSK	DH1	HCH	0.3824	122.368	≤0.4
GFSK	DH3	LCH	1.670	267.200	≤0.4
GFSK	DH3	MCH	1.670	267.200	≤0.4
GFSK	DH3	HCH	1.649	263.840	≤0.4
GFSK	DH5	LCH	2.943	313.920	≤0.4
GFSK	DH5	MCH	2.920	311.467	≤0.4
GFSK	DH5	HCH	2.919	311.360	≤0.4
π/4DQPSK	2DH1	LCH	0.3837	122.784	≤0.4
π/4DQPSK	2DH1	MCH	0.3791	121.312	≤0.4
π/4DQPSK	2DH1	HCH	0.3836	122.752	≤0.4
π/4DQPSK	2DH3	LCH	1.654	264.640	≤0.4
π/4DQPSK	2DH3	MCH	1.651	264.160	≤0.4
π/4DQPSK	2DH3	HCH	1.660	265.600	≤0.4
π/4DQPSK	2DH5	LCH	2.919	311.360	≤0.4
π/4DQPSK	2DH5	MCH	2.924	311.893	≤0.4
π/4DQPSK	2DH5	HCH	2.940	313.600	≤0.4

Remark:


The test period:  $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$

DH1/2DH1 Dwell time =  $\text{Burst Width}(\text{ms}) \times (1600 / (2 \times 79)) \times 31.6$




DH3/2DH3 Dwell time =  $\text{Burst Width}(\text{ms}) \times (1600 / (4 \times 79)) \times 31.6$




DH5/2DH5 Dwell time =  $\text{Burst Width}(\text{ms}) \times (1600 / (6 \times 79)) \times 31.6$




Test plot as follows:



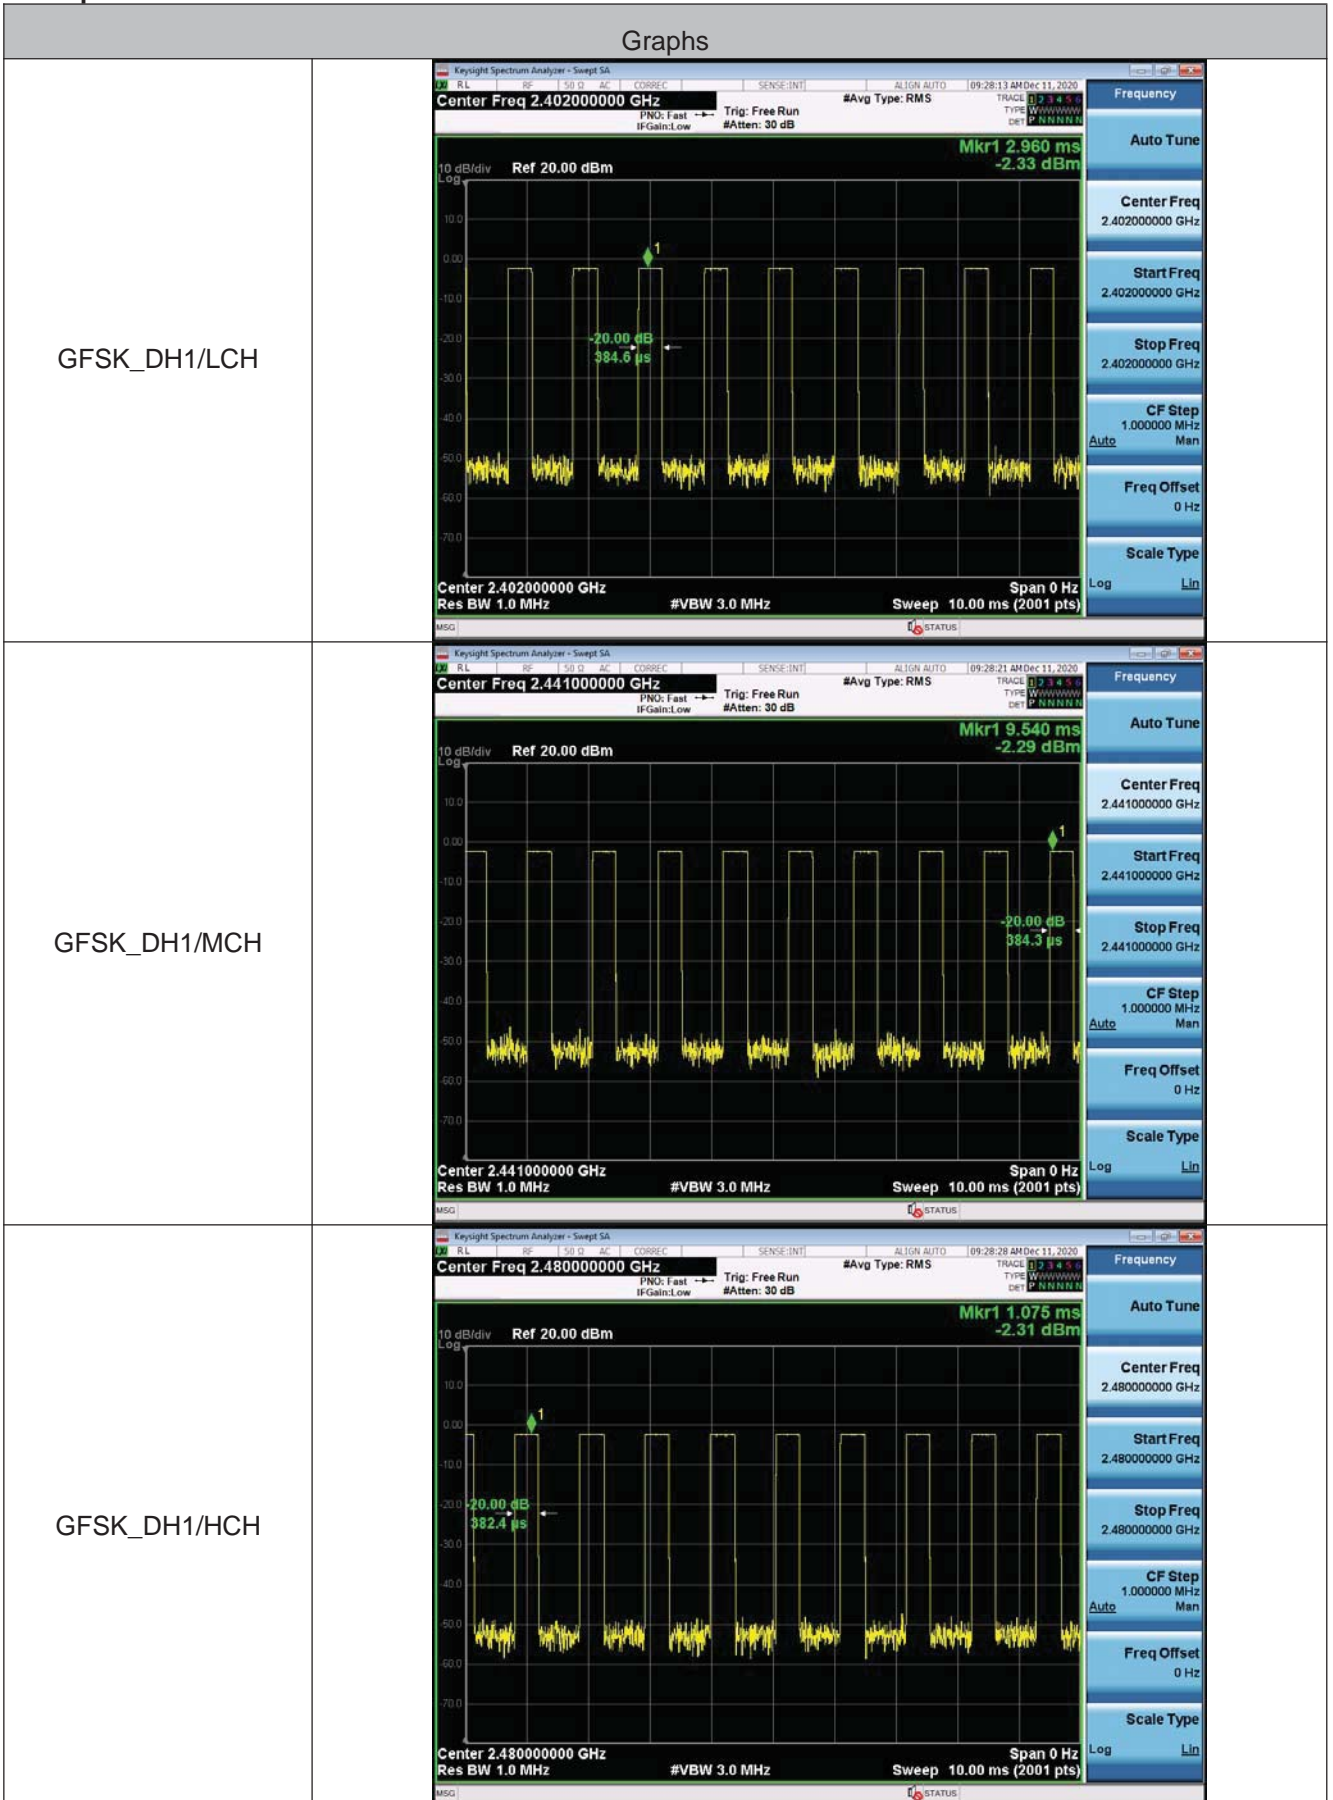


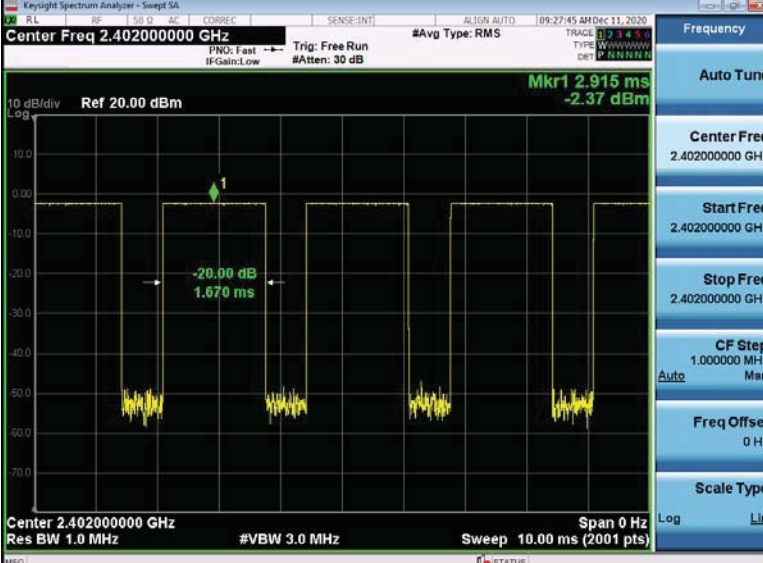
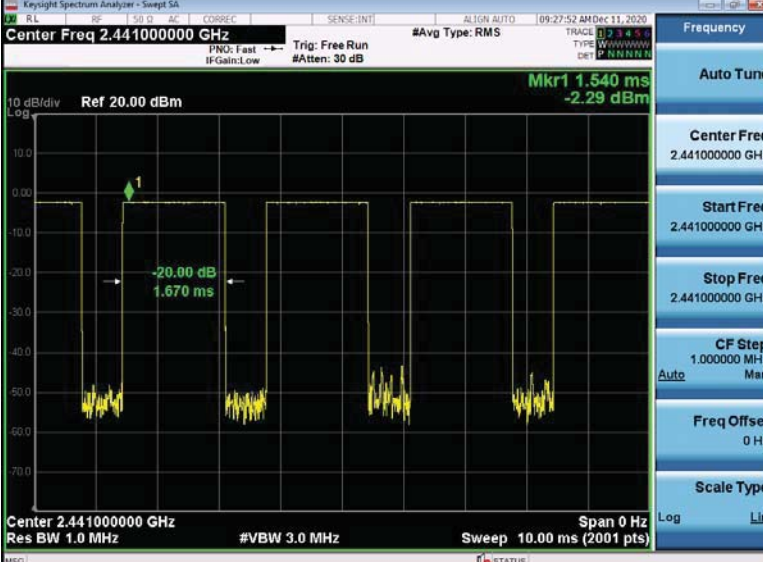
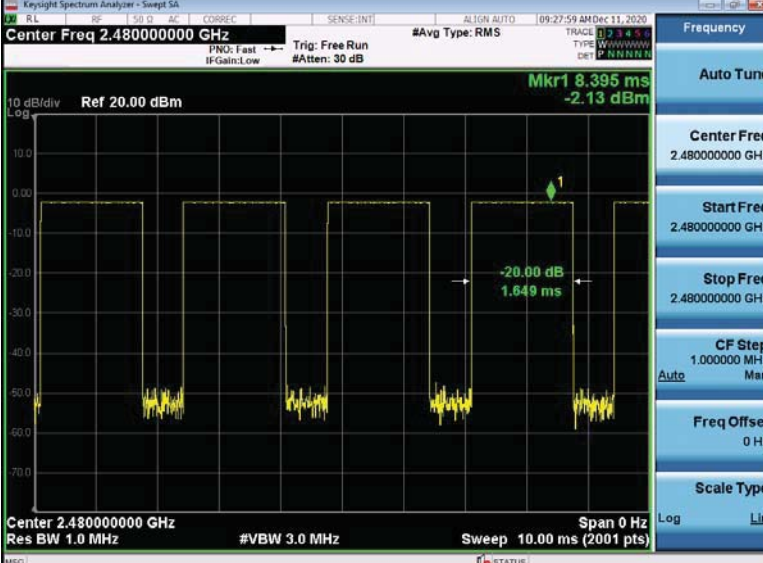


<p>GFSK_DH3/LCH</p>		<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.402000000 GHz</p> <p>Start Freq 2.402000000 GHz</p> <p>Stop Freq 2.402000000 GHz</p> <p>CF Step 1.000000 MHz Auto Man</p> <p>Freq Offset 0 Hz</p> <p>Scale Type Log Lin</p>
<p>GFSK_DH3/MCH</p>		<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.441000000 GHz</p> <p>Start Freq 2.441000000 GHz</p> <p>Stop Freq 2.441000000 GHz</p> <p>CF Step 1.000000 MHz Auto Man</p> <p>Freq Offset 0 Hz</p> <p>Scale Type Log Lin</p>
<p>GFSK_DH3/HCH</p>		<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.480000000 GHz</p> <p>Start Freq 2.480000000 GHz</p> <p>Stop Freq 2.480000000 GHz</p> <p>CF Step 1.000000 MHz Auto Man</p> <p>Freq Offset 0 Hz</p> <p>Scale Type Log Lin</p>

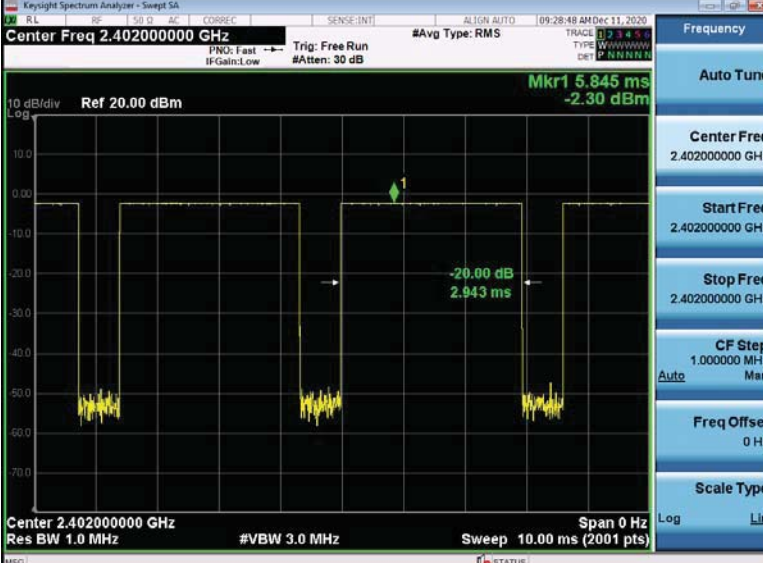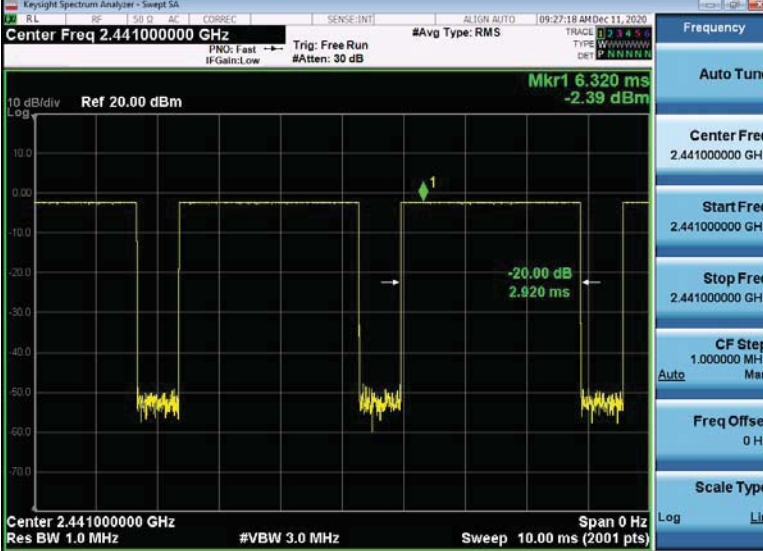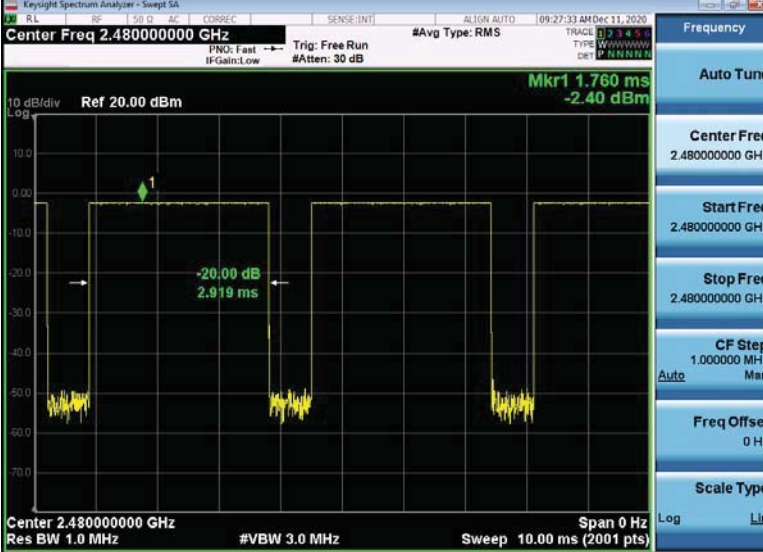
<p>GFSK_DH5/LCH</p>	 <p>Keysight Spectrum Analyzer - Swept SA Center Freq 2.402000000 GHz Ref 20.00 dBm Mkr1 5.845 ms -2.30 dBm -20.00 dB 2.943 ms Center 2.402000000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Sweep 10.00 ms (2001 pts) Span 0 Hz</p>	<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.402000000 GHz</p> <p>Start Freq 2.402000000 GHz</p> <p>Stop Freq 2.402000000 GHz</p> <p>CF Step 1.000000 MHz Auto Man</p> <p>Freq Offset 0 Hz</p> <p>Scale Type Log Lin</p>
<p>GFSK_DH5/MCH</p>	 <p>Keysight Spectrum Analyzer - Swept SA Center Freq 2.441000000 GHz Ref 20.00 dBm Mkr1 6.320 ms -2.39 dBm -20.00 dB 2.920 ms Center 2.441000000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Sweep 10.00 ms (2001 pts) Span 0 Hz</p>	<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.441000000 GHz</p> <p>Start Freq 2.441000000 GHz</p> <p>Stop Freq 2.441000000 GHz</p> <p>CF Step 1.000000 MHz Auto Man</p> <p>Freq Offset 0 Hz</p> <p>Scale Type Log Lin</p>
<p>GFSK_DH5/HCH</p>	 <p>Keysight Spectrum Analyzer - Swept SA Center Freq 2.480000000 GHz Ref 20.00 dBm Mkr1 1.760 ms -2.40 dBm -20.00 dB 2.919 ms Center 2.480000000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Sweep 10.00 ms (2001 pts) Span 0 Hz</p>	<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.480000000 GHz</p> <p>Start Freq 2.480000000 GHz</p> <p>Stop Freq 2.480000000 GHz</p> <p>CF Step 1.000000 MHz Auto Man</p> <p>Freq Offset 0 Hz</p> <p>Scale Type Log Lin</p>
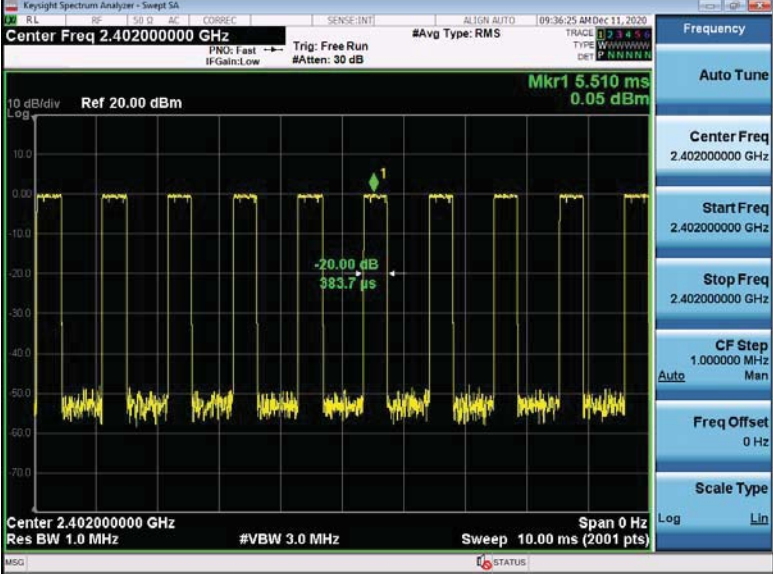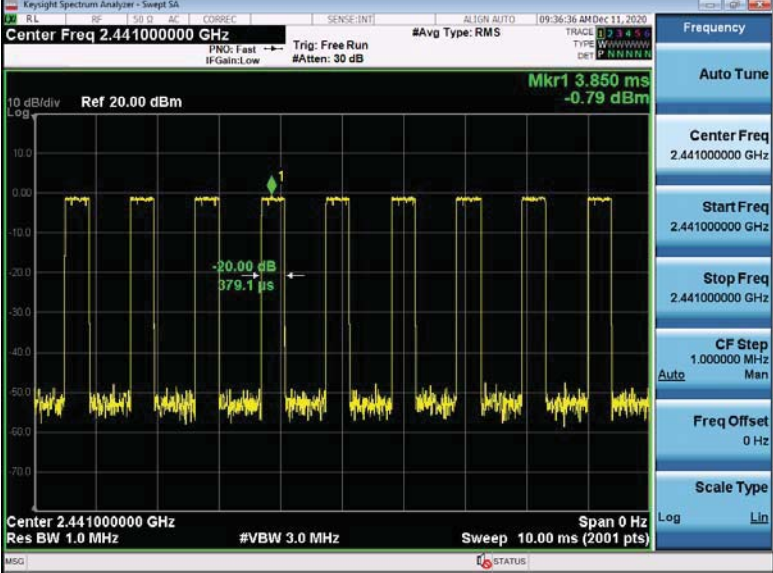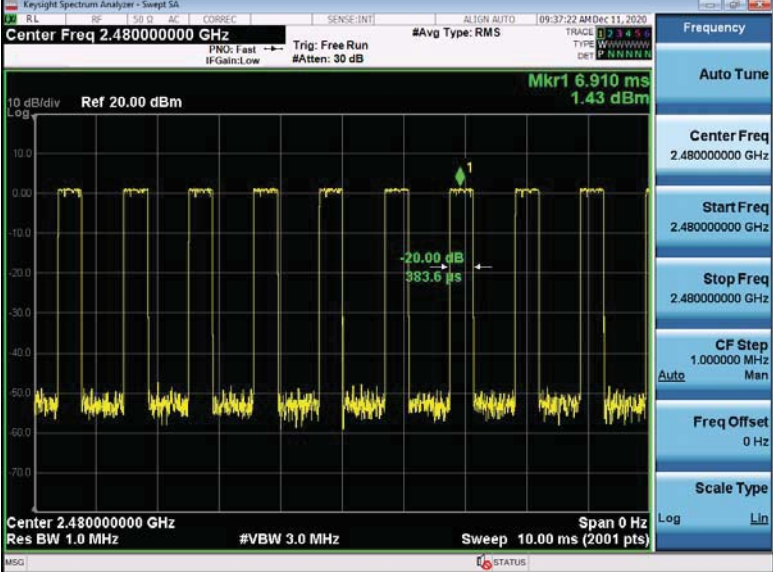
<p><math>\pi/4</math>DQPSK _2DH1/LCH</p>	 <p>Keysight Spectrum Analyzer - Swept SA Center Freq 2.402000000 GHz Ref 20.00 dBm Mkr1 5.510 ms 0.05 dBm -20.00 dB 383.7 <math>\mu</math>s Center 2.402000000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Sweep 10.00 ms (2001 pts)</p>	<p>Frequency Auto Tune Center Freq 2.402000000 GHz Start Freq 2.402000000 GHz Stop Freq 2.402000000 GHz CF Step 1.000000 MHz Auto Man Freq Offset 0 Hz Scale Type Log Lin</p>
<p><math>\pi/4</math>DQPSK _2DH1/MCH</p>	 <p>Keysight Spectrum Analyzer - Swept SA Center Freq 2.441000000 GHz Ref 20.00 dBm Mkr1 3.850 ms -0.79 dBm -20.00 dB 379.1 <math>\mu</math>s Center 2.441000000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Sweep 10.00 ms (2001 pts)</p>	<p>Frequency Auto Tune Center Freq 2.441000000 GHz Start Freq 2.441000000 GHz Stop Freq 2.441000000 GHz CF Step 1.000000 MHz Auto Man Freq Offset 0 Hz Scale Type Log Lin</p>
<p><math>\pi/4</math>DQPSK _2DH1/HCH</p>	 <p>Keysight Spectrum Analyzer - Swept SA Center Freq 2.480000000 GHz Ref 20.00 dBm Mkr1 6.910 ms 1.43 dBm -20.00 dB 383.6 <math>\mu</math>s Center 2.480000000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Sweep 10.00 ms (2001 pts)</p>	<p>Frequency Auto Tune Center Freq 2.480000000 GHz Start Freq 2.480000000 GHz Stop Freq 2.480000000 GHz CF Step 1.000000 MHz Auto Man Freq Offset 0 Hz Scale Type Log Lin</p>

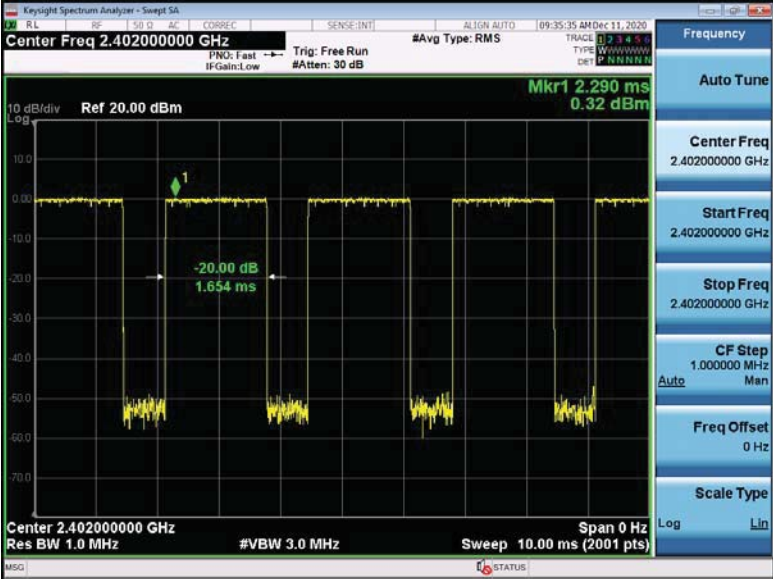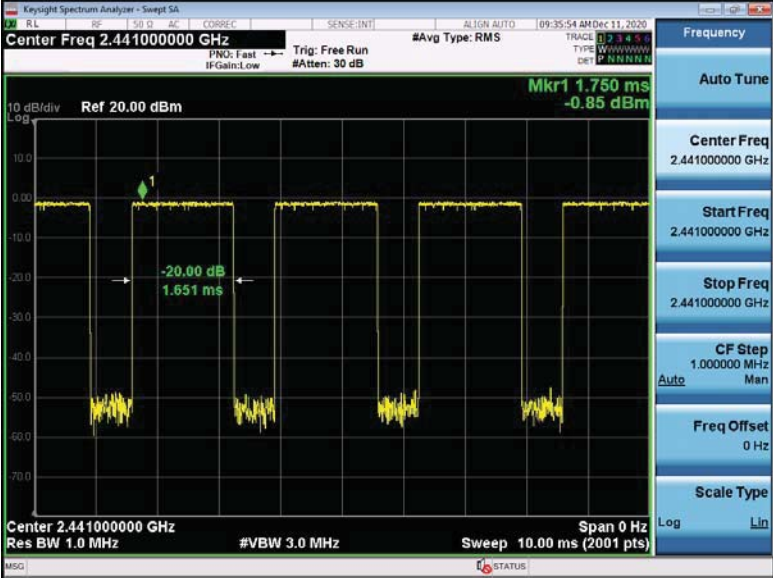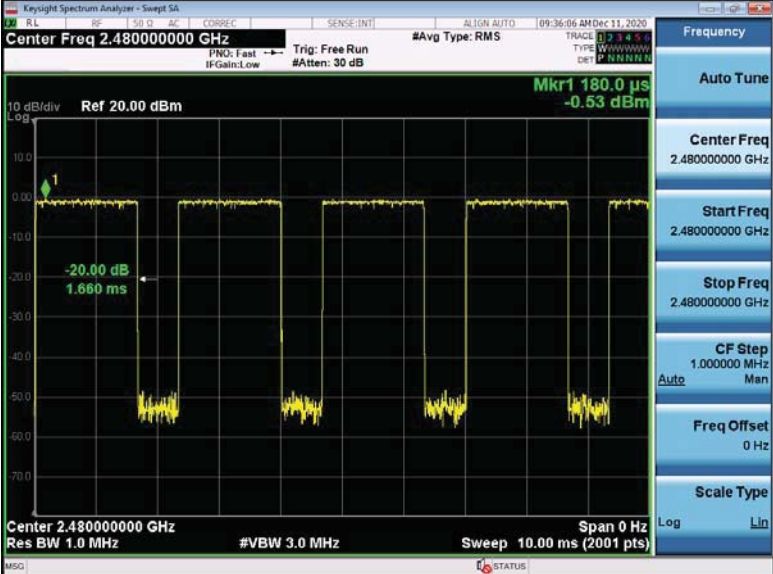
<p><math>\pi/4</math>DQPSK _2DH3/LCH</p>		<p>Frequency Auto Tune Center Freq 2.402000000 GHz Start Freq 2.402000000 GHz Stop Freq 2.402000000 GHz CF Step 1.000000 MHz Auto Man Freq Offset 0 Hz Scale Type Log Lin</p>
<p><math>\pi/4</math>DQPSK _2DH3/MCH</p>		<p>Frequency Auto Tune Center Freq 2.441000000 GHz Start Freq 2.441000000 GHz Stop Freq 2.441000000 GHz CF Step 1.000000 MHz Auto Man Freq Offset 0 Hz Scale Type Log Lin</p>
<p><math>\pi/4</math>DQPSK _2DH3/HCH</p>		<p>Frequency Auto Tune Center Freq 2.480000000 GHz Start Freq 2.480000000 GHz Stop Freq 2.480000000 GHz CF Step 1.000000 MHz Auto Man Freq Offset 0 Hz Scale Type Log Lin</p>
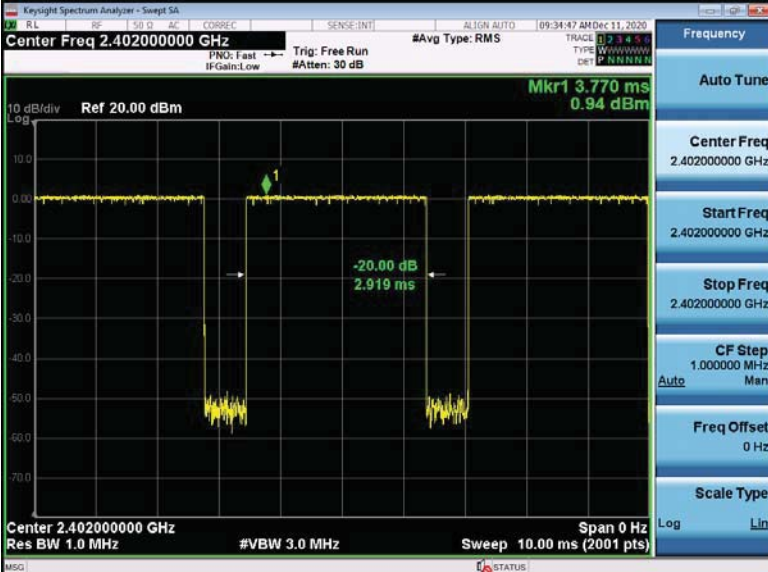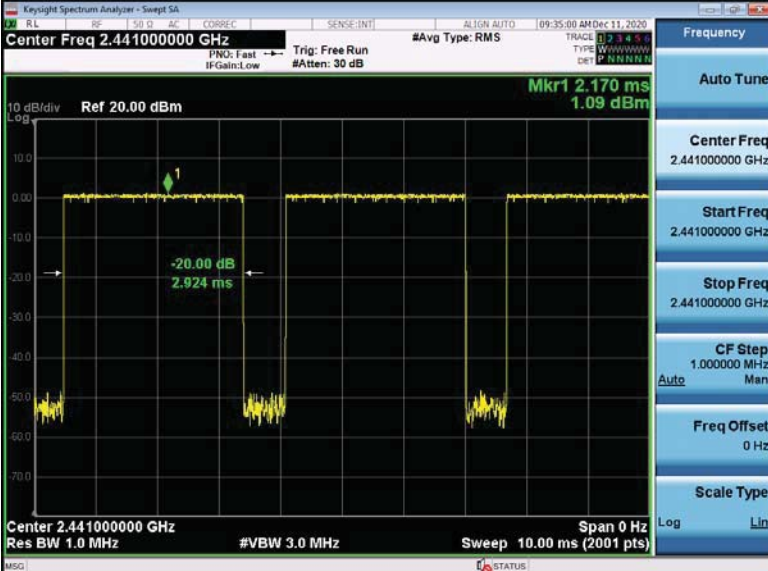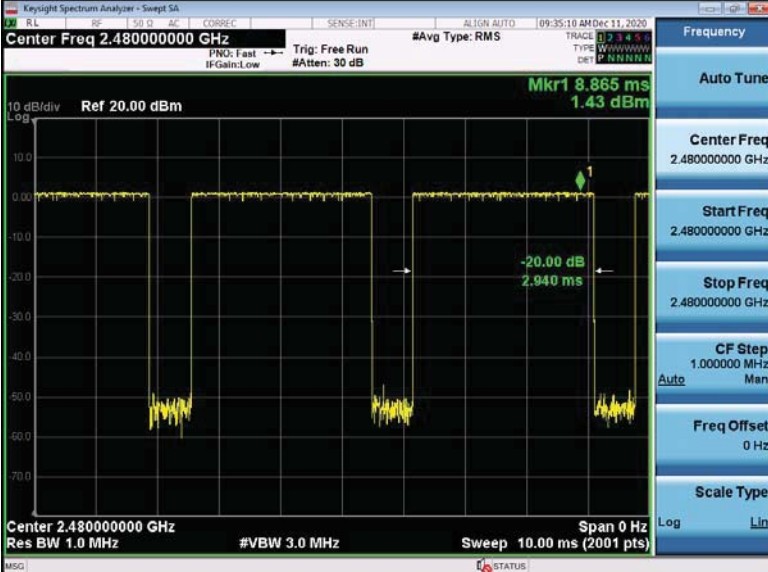
<p><math>\pi/4</math>DQPSK _2DH5/LCH</p>	 <p>Keysight Spectrum Analyzer - Swept SA Center Freq 2.402000000 GHz Ref 20.00 dBm Mkr1 3.770 ms 0.94 dBm -20.00 dB 2.919 ms Center 2.402000000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Sweep 10.00 ms (2001 pts)</p>	<p>Frequency Auto Tune Center Freq 2.402000000 GHz Start Freq 2.402000000 GHz Stop Freq 2.402000000 GHz CF Step 1.000000 MHz Auto Man Freq Offset 0 Hz Scale Type Log Lin</p>
<p><math>\pi/4</math>DQPSK _2DH5/MCH</p>	 <p>Keysight Spectrum Analyzer - Swept SA Center Freq 2.441000000 GHz Ref 20.00 dBm Mkr1 2.170 ms 1.09 dBm -20.00 dB 2.924 ms Center 2.441000000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Sweep 10.00 ms (2001 pts)</p>	<p>Frequency Auto Tune Center Freq 2.441000000 GHz Start Freq 2.441000000 GHz Stop Freq 2.441000000 GHz CF Step 1.000000 MHz Auto Man Freq Offset 0 Hz Scale Type Log Lin</p>
<p><math>\pi/4</math>DQPSK _2DH5/HCH</p>	 <p>Keysight Spectrum Analyzer - Swept SA Center Freq 2.480000000 GHz Ref 20.00 dBm Mkr1 8.865 ms 1.43 dBm -20.00 dB 2.940 ms Center 2.480000000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Sweep 10.00 ms (2001 pts)</p>	<p>Frequency Auto Tune Center Freq 2.480000000 GHz Start Freq 2.480000000 GHz Stop Freq 2.480000000 GHz CF Step 1.000000 MHz Auto Man Freq Offset 0 Hz Scale Type Log Lin</p>

## 5.8 Band-edge for RF Conducted Emissions

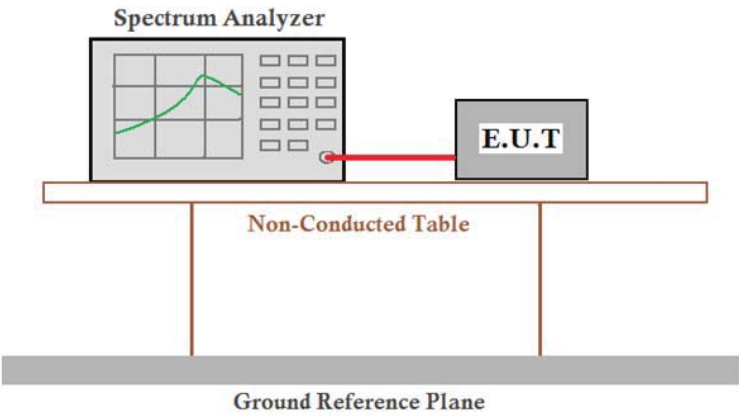Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10:2013
Test Setup:	 <p style="text-align: center;"><i>Remark: Offset=cable loss+ attenuation factor.</i></p>
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Exploratory Test Mode:	Hopping and Non-hopping transmitting with all kind of modulation and all kind of data type
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of $\pi/4$ DQPSK modulation type Only the worst case is recorded in the report.
Test Results:	Pass

Test plot as follows:

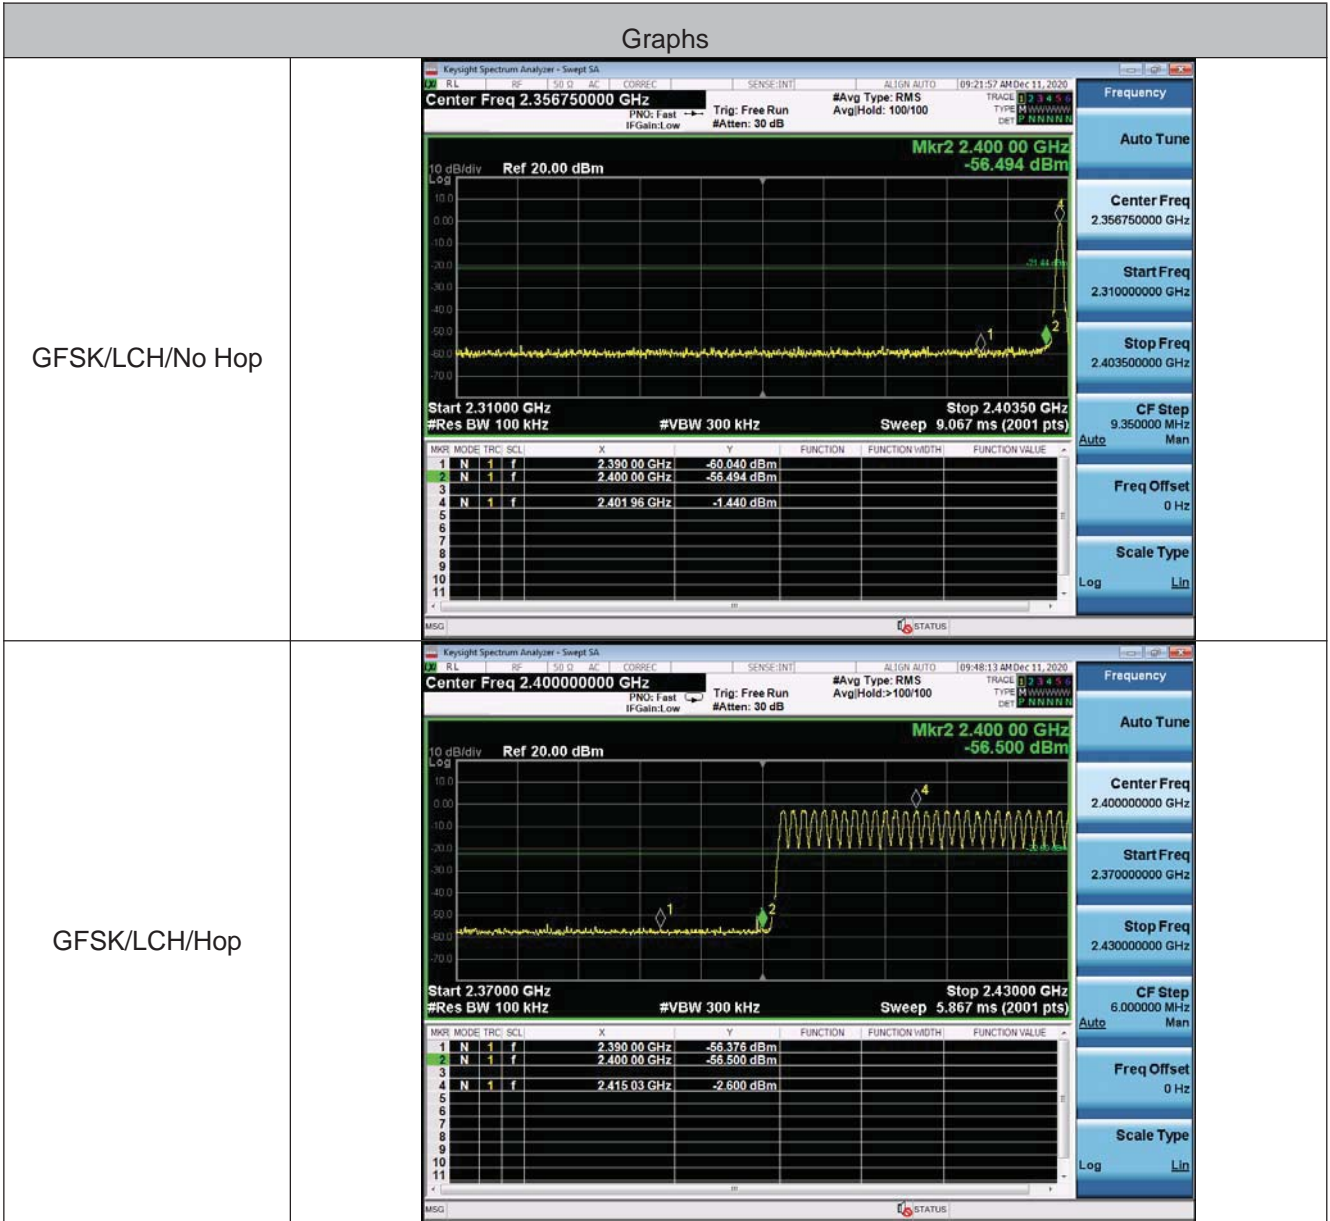



<p>GFSK/HCH/No Hop</p>	<p>Center Freq 2.48925000 GHz</p> <p>Mkr2 2.50000 GHz -58.903 dBm</p> <p>Start 2.47850 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.50000 GHz Sweep 2.133 ms (2001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483500 GHz</td> <td>-60.221 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.500000 GHz</td> <td>-58.903 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.480027 GHz</td> <td>-2.738 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.483500 GHz	-60.221 dBm				2	N	1	f	2.500000 GHz	-58.903 dBm				3									4	N	1	f	2.480027 GHz	-2.738 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.483500 GHz	-60.221 dBm																																									
2	N	1	f	2.500000 GHz	-58.903 dBm																																									
3																																														
4	N	1	f	2.480027 GHz	-2.738 dBm																																									
<p>GFSK/HCH/Hop</p>	<p>Center Freq 2.48350000 GHz</p> <p>Mkr2 2.50000 GHz -58.700 dBm</p> <p>Start 2.45350 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.51350 GHz Sweep 5.867 ms (2001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483500 GHz</td> <td>-58.561 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.500000 GHz</td> <td>-58.700 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.482027 GHz</td> <td>-2.482 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.483500 GHz	-58.561 dBm				2	N	1	f	2.500000 GHz	-58.700 dBm				3									4	N	1	f	2.482027 GHz	-2.482 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.483500 GHz	-58.561 dBm																																									
2	N	1	f	2.500000 GHz	-58.700 dBm																																									
3																																														
4	N	1	f	2.482027 GHz	-2.482 dBm																																									
<p><math>\pi</math>/4DQPSK/LCH/No Hop</p>	<p>Center Freq 2.35675000 GHz</p> <p>Mkr2 2.40000 GHz -53.947 dBm</p> <p>Start 2.31000 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.40350 GHz Sweep 9.067 ms (2001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.390000 GHz</td> <td>-58.942 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400000 GHz</td> <td>-53.947 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.40186 GHz</td> <td>-4.340 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.390000 GHz	-58.942 dBm				2	N	1	f	2.400000 GHz	-53.947 dBm				3									4	N	1	f	2.40186 GHz	-4.340 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.390000 GHz	-58.942 dBm																																									
2	N	1	f	2.400000 GHz	-53.947 dBm																																									
3																																														
4	N	1	f	2.40186 GHz	-4.340 dBm																																									





<p><math>\pi/4</math>DQPSK/LCH/Hop</p>	
<p><math>\pi/4</math>DQPSK/HCH/No Hop</p>	
<p><math>\pi/4</math>DQPSK/HCH/Hop</p>	


## 5.9 Spurious RF Conducted Emissions

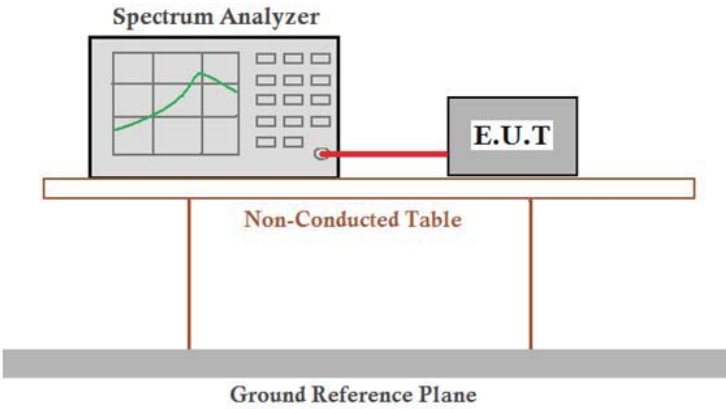
Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10:2013
Test Setup:	 <p style="text-align: center;"><i>Remark: Offset=cable loss+ attenuation factor.</i></p>
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of $\pi/4$ DQPSK modulation type
Test Results:	Pass

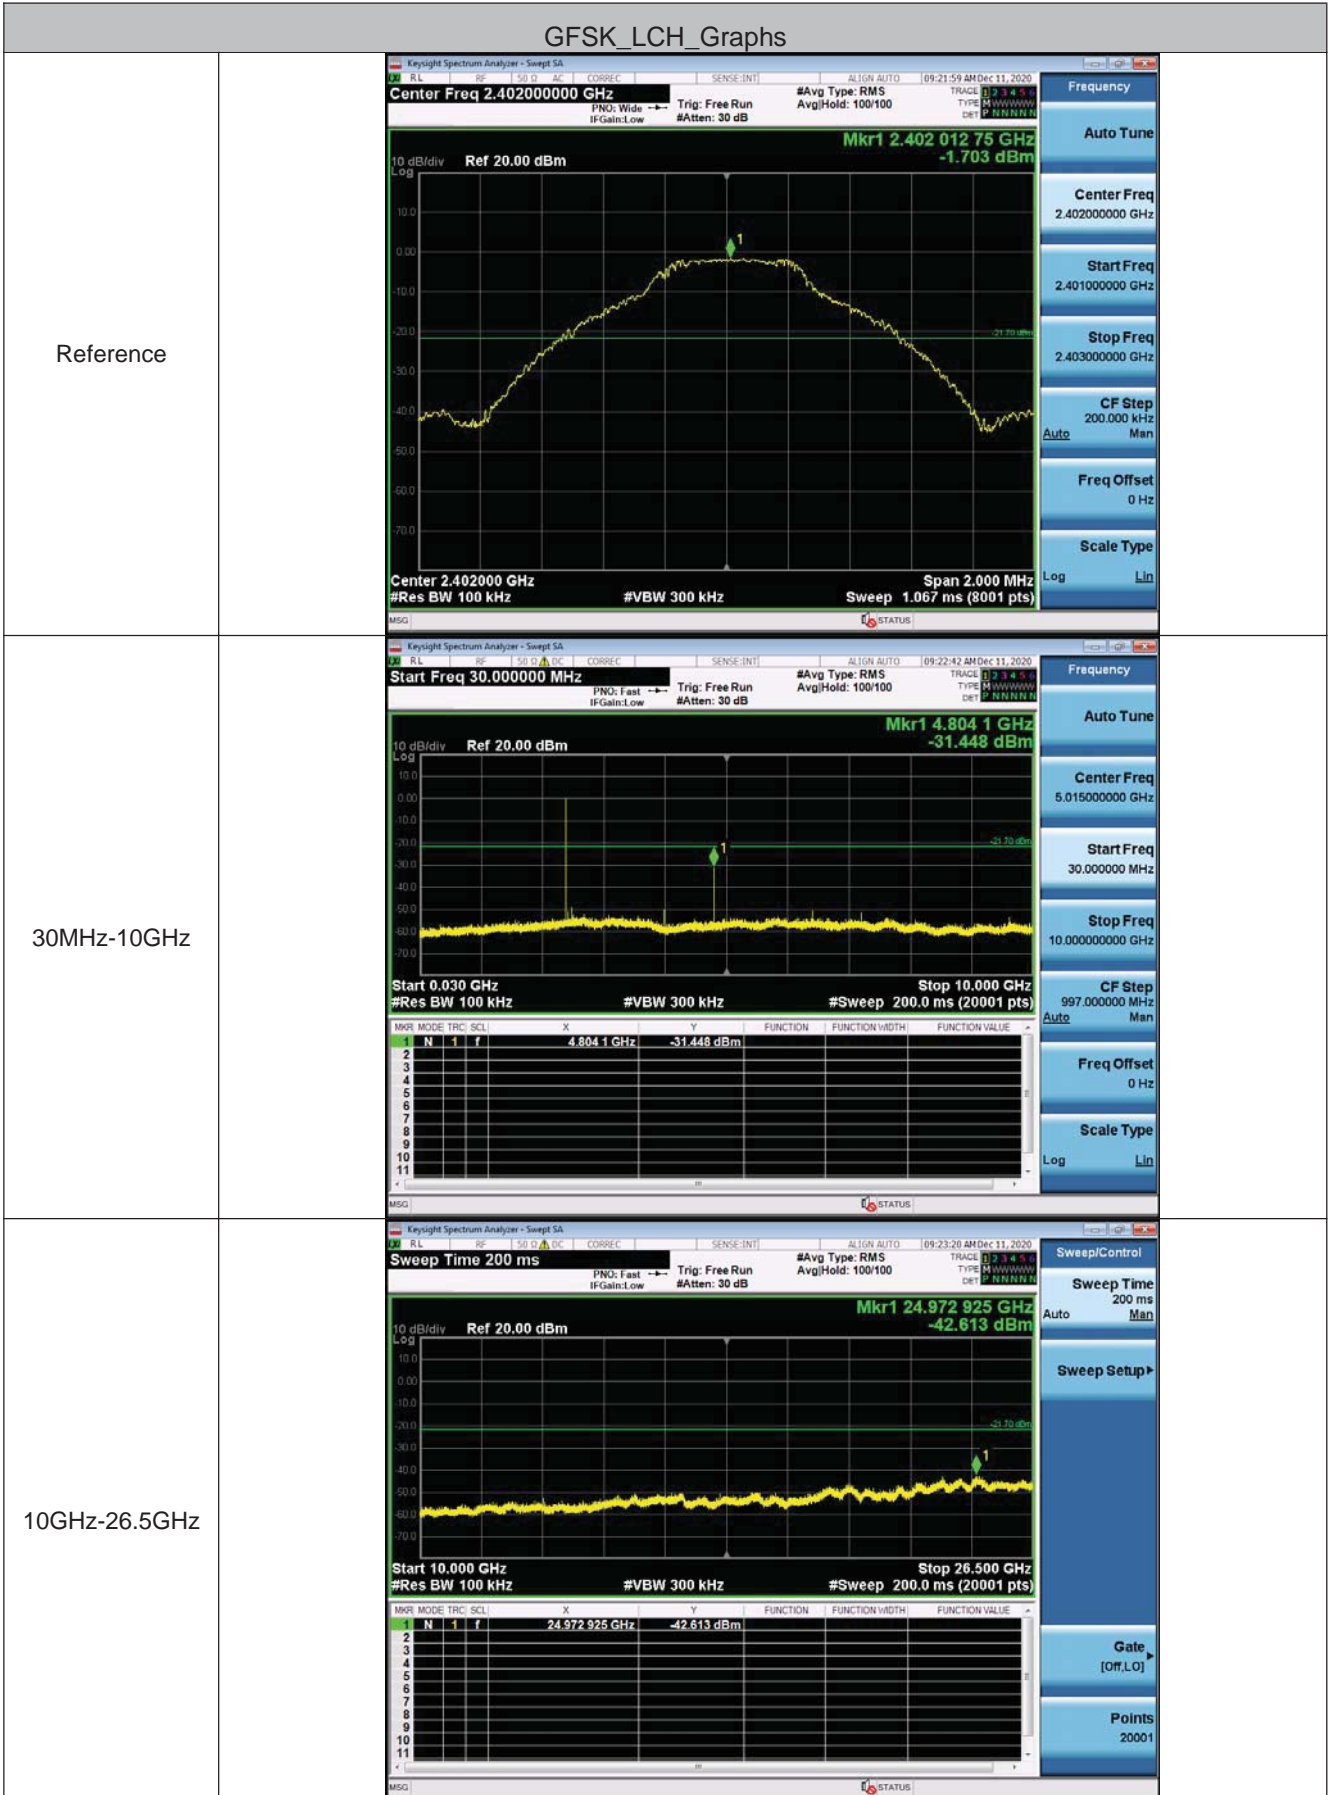


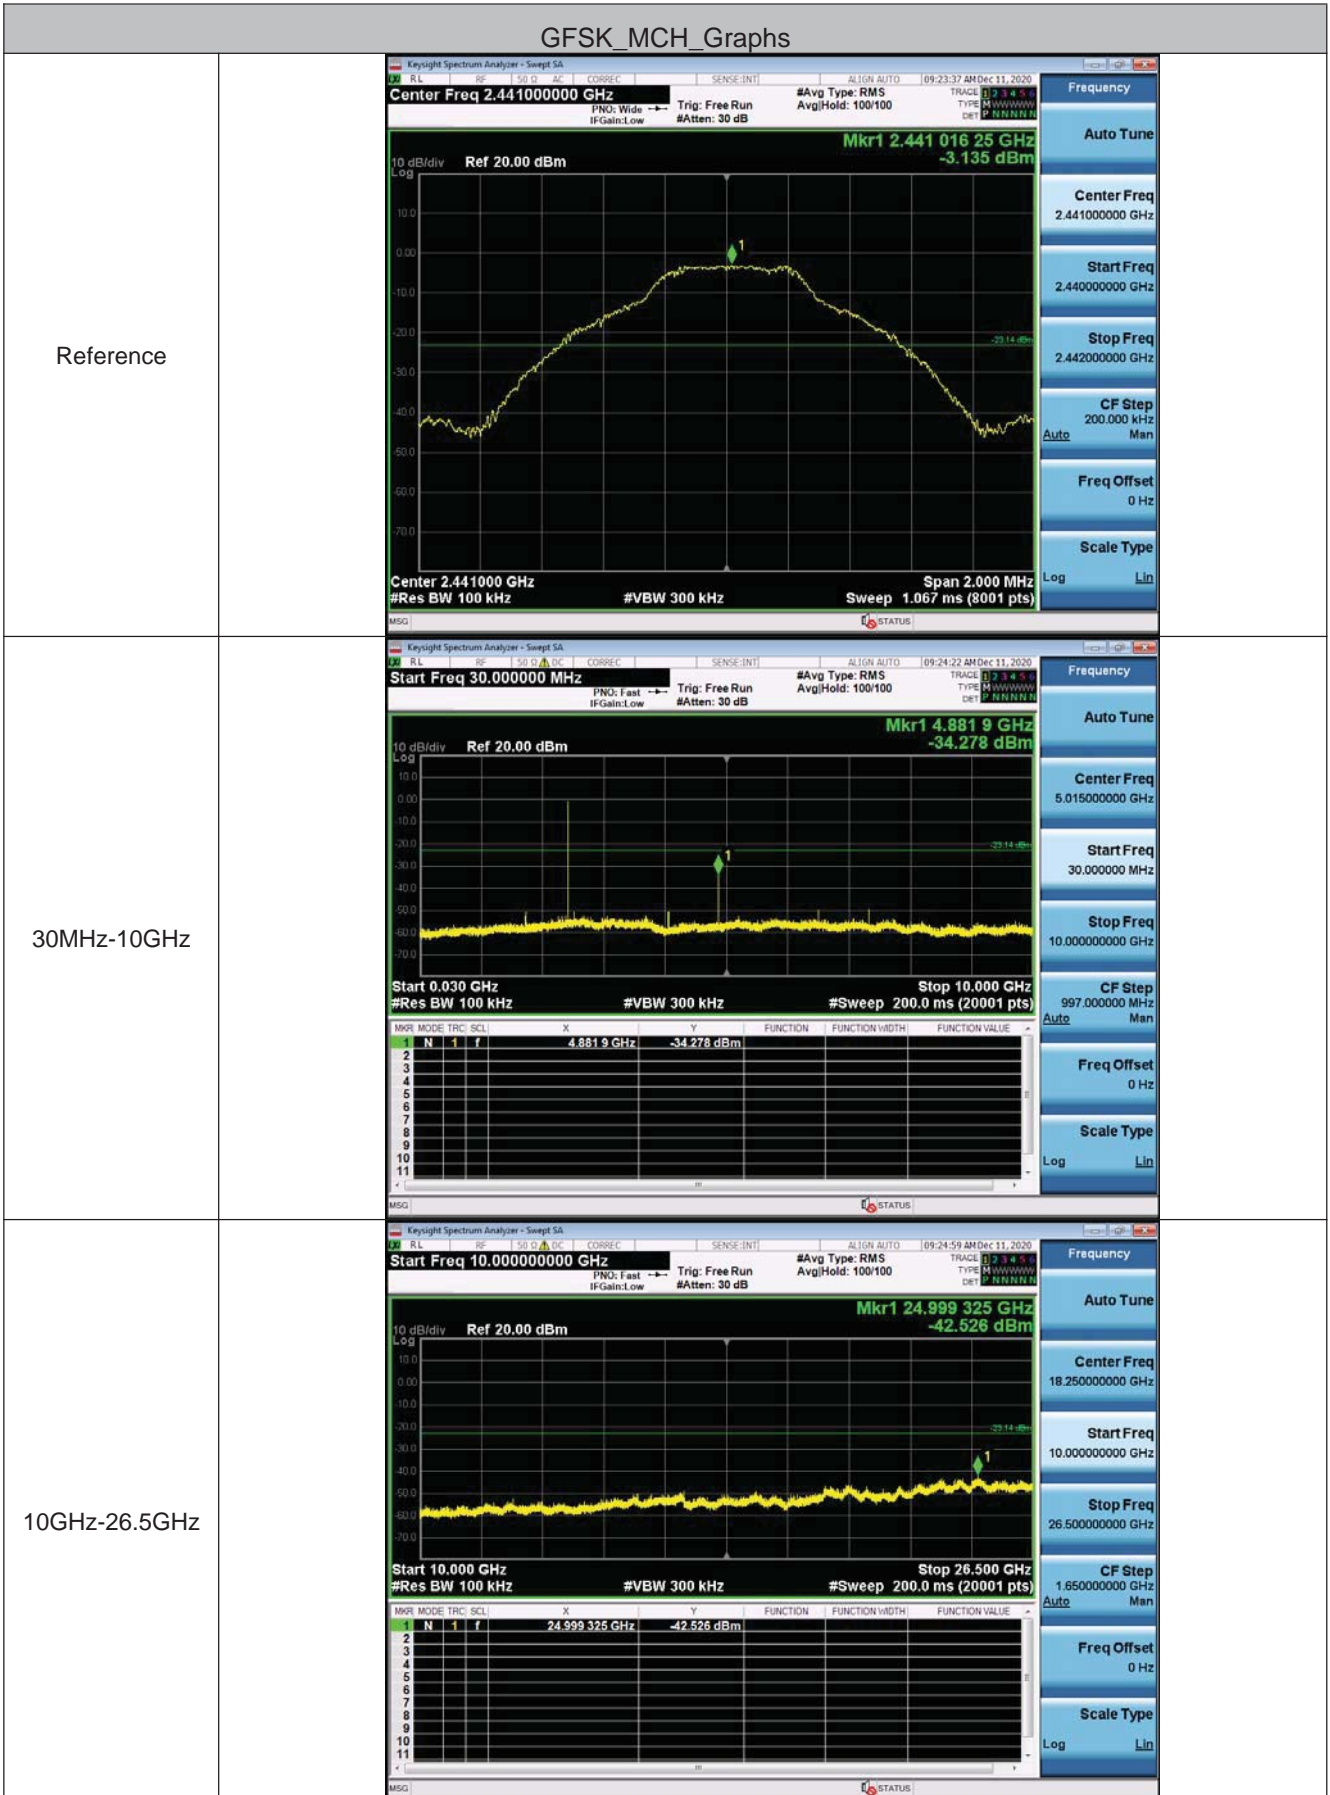

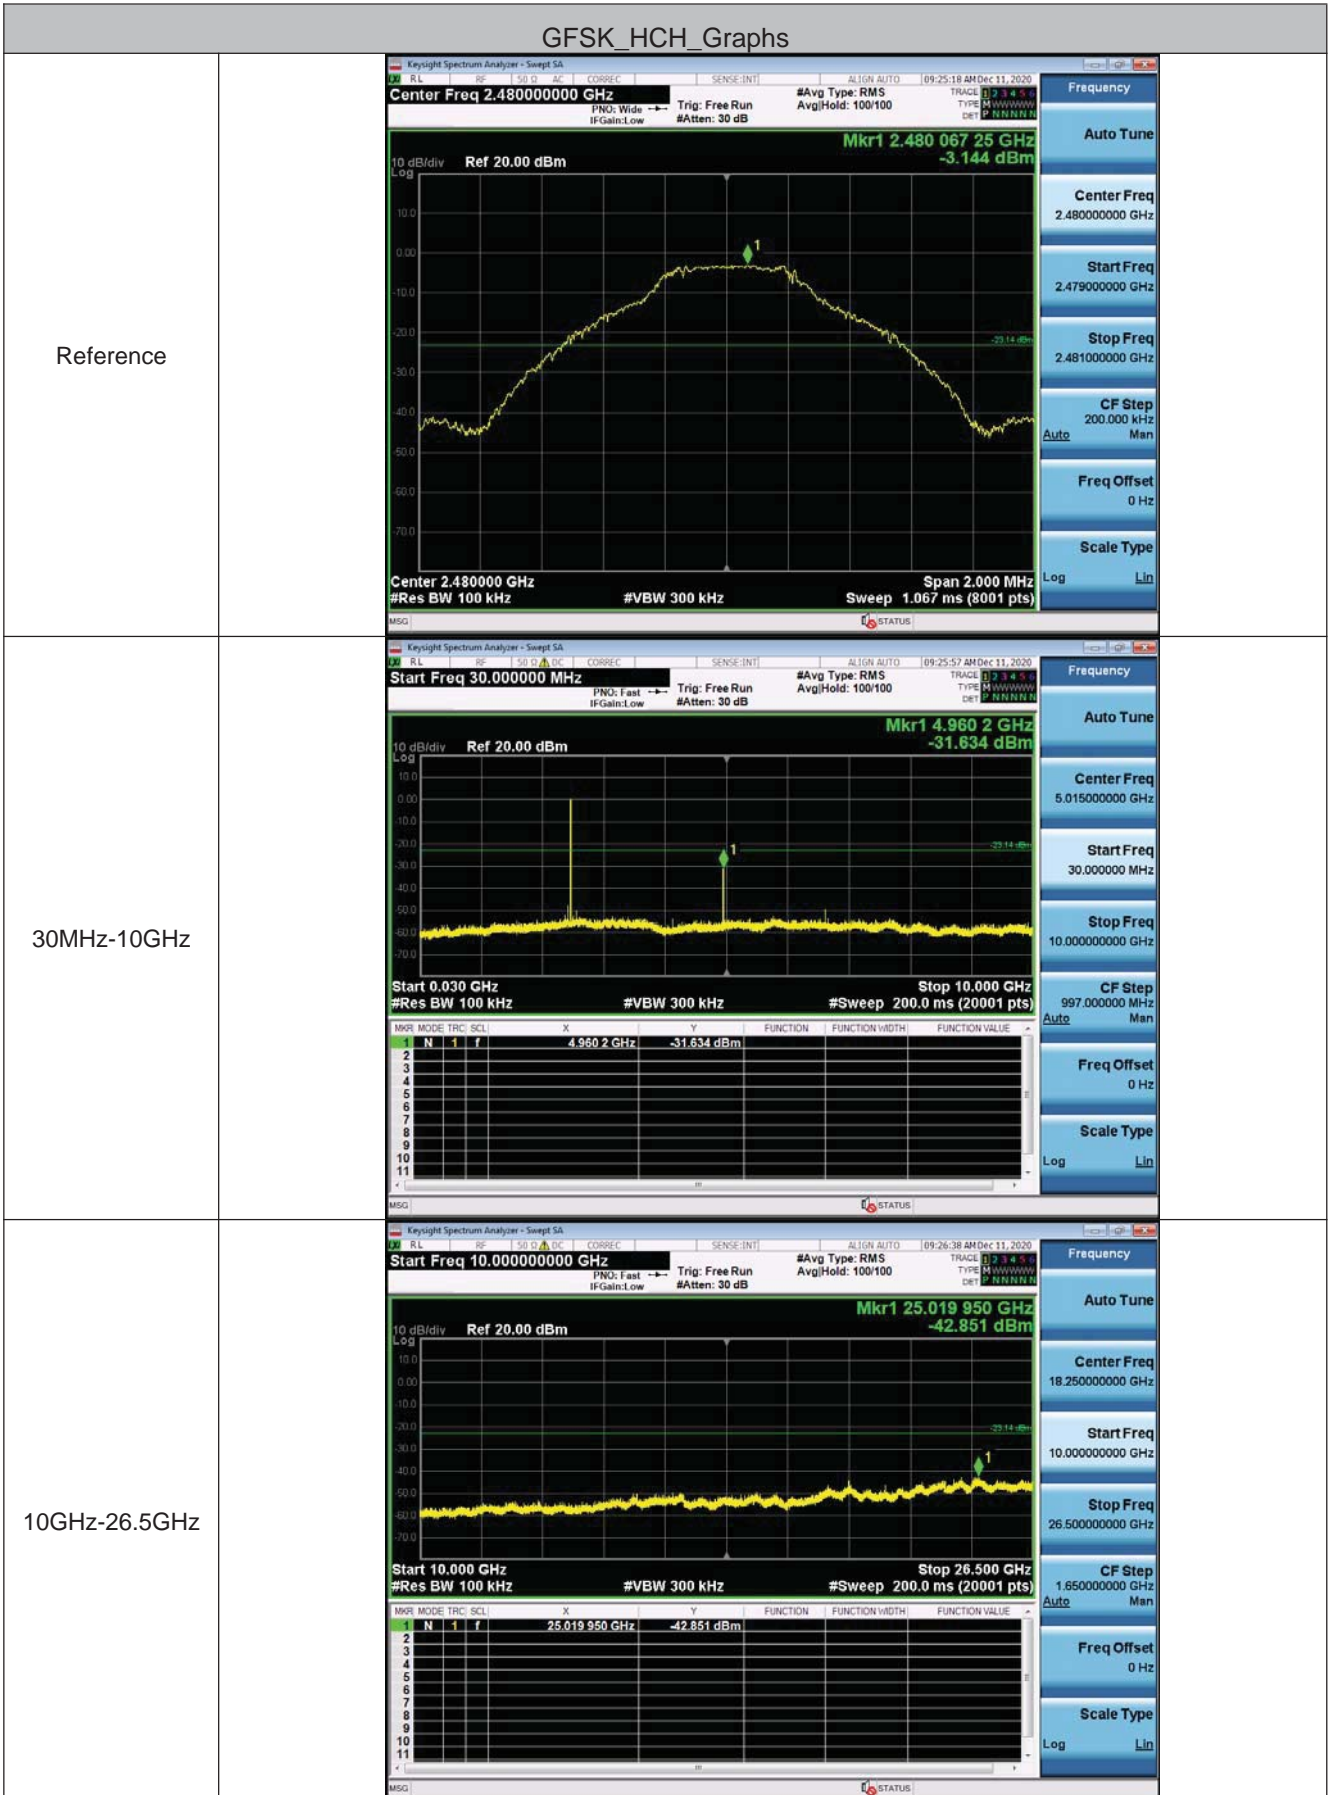

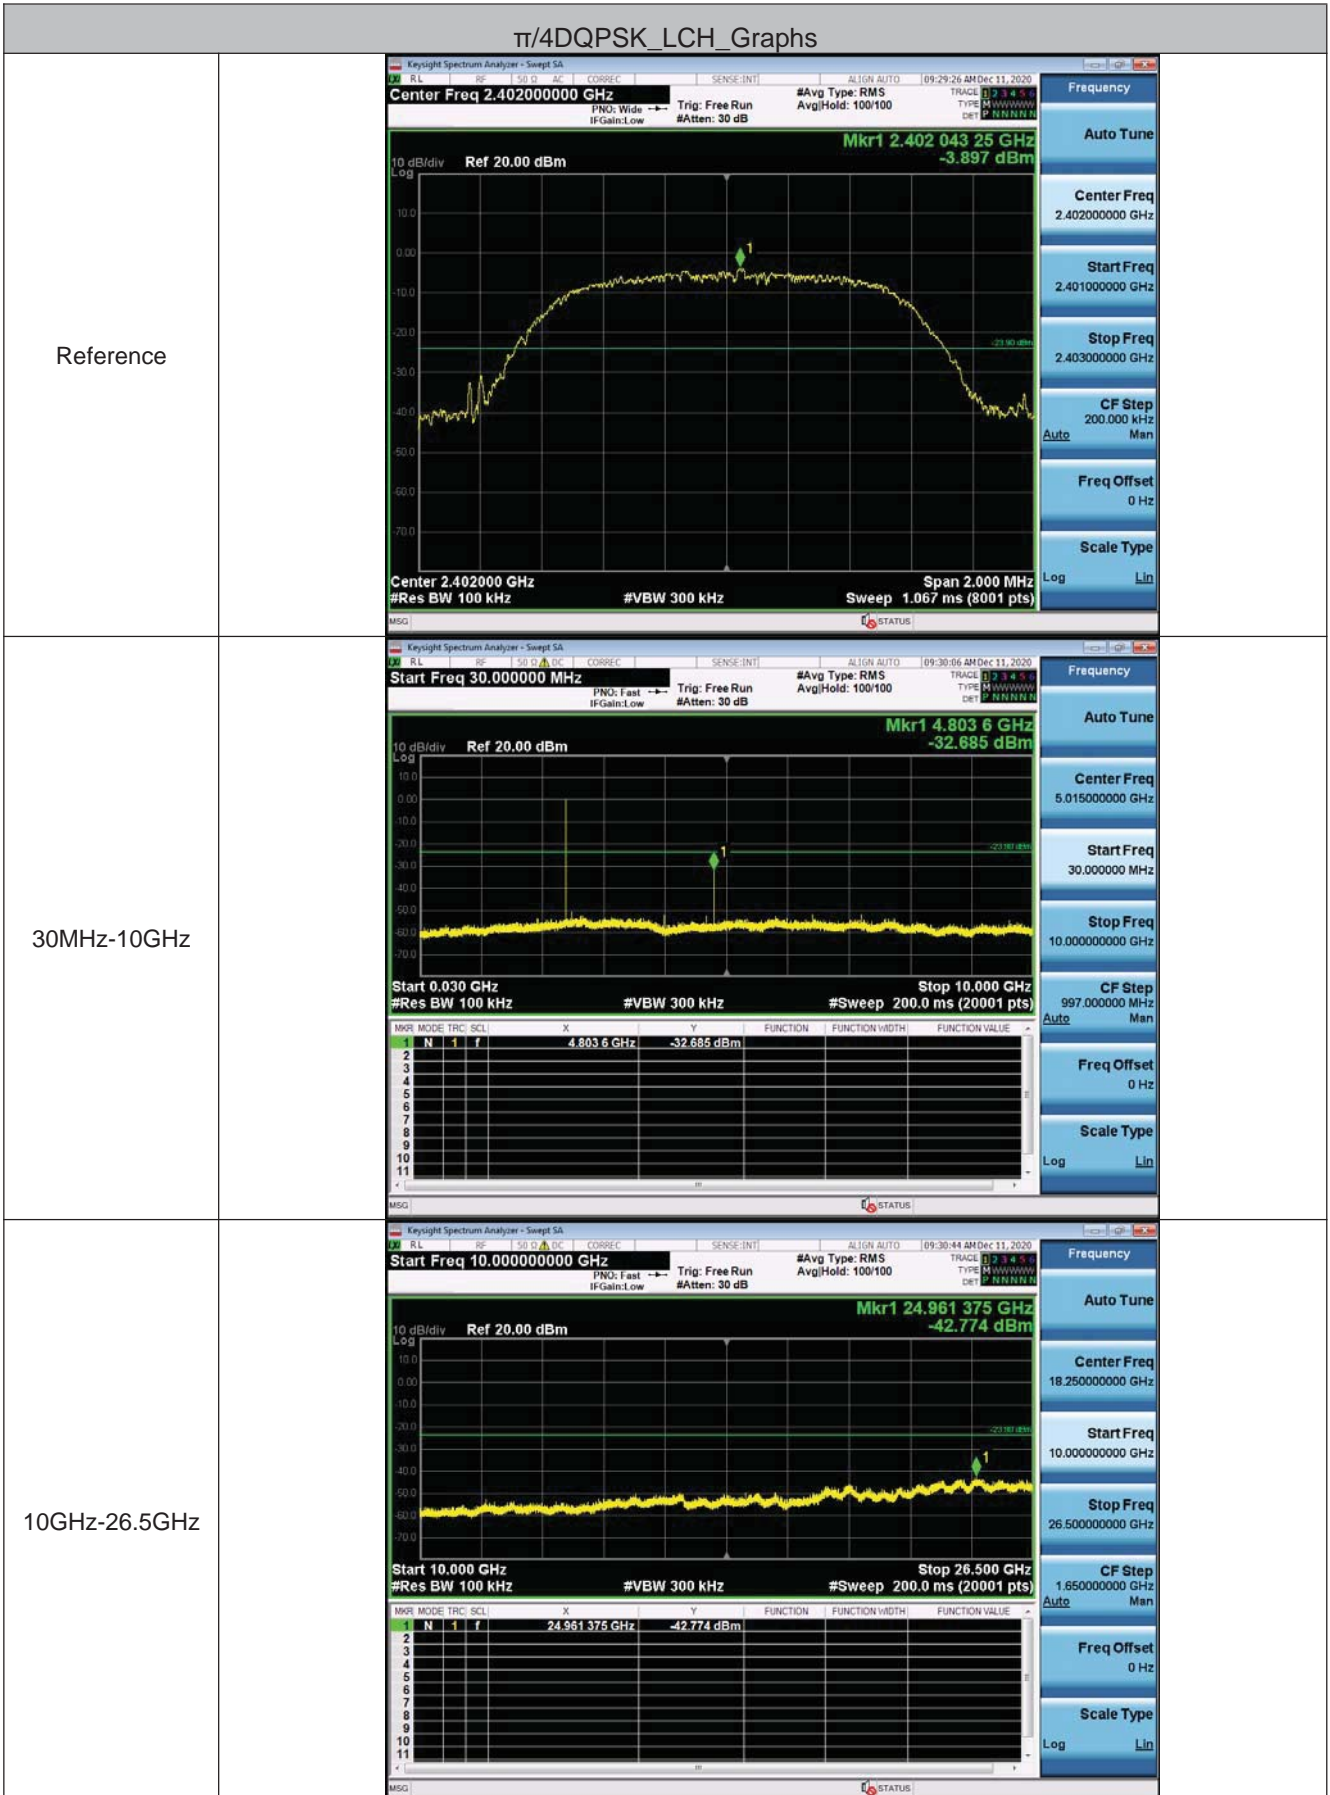

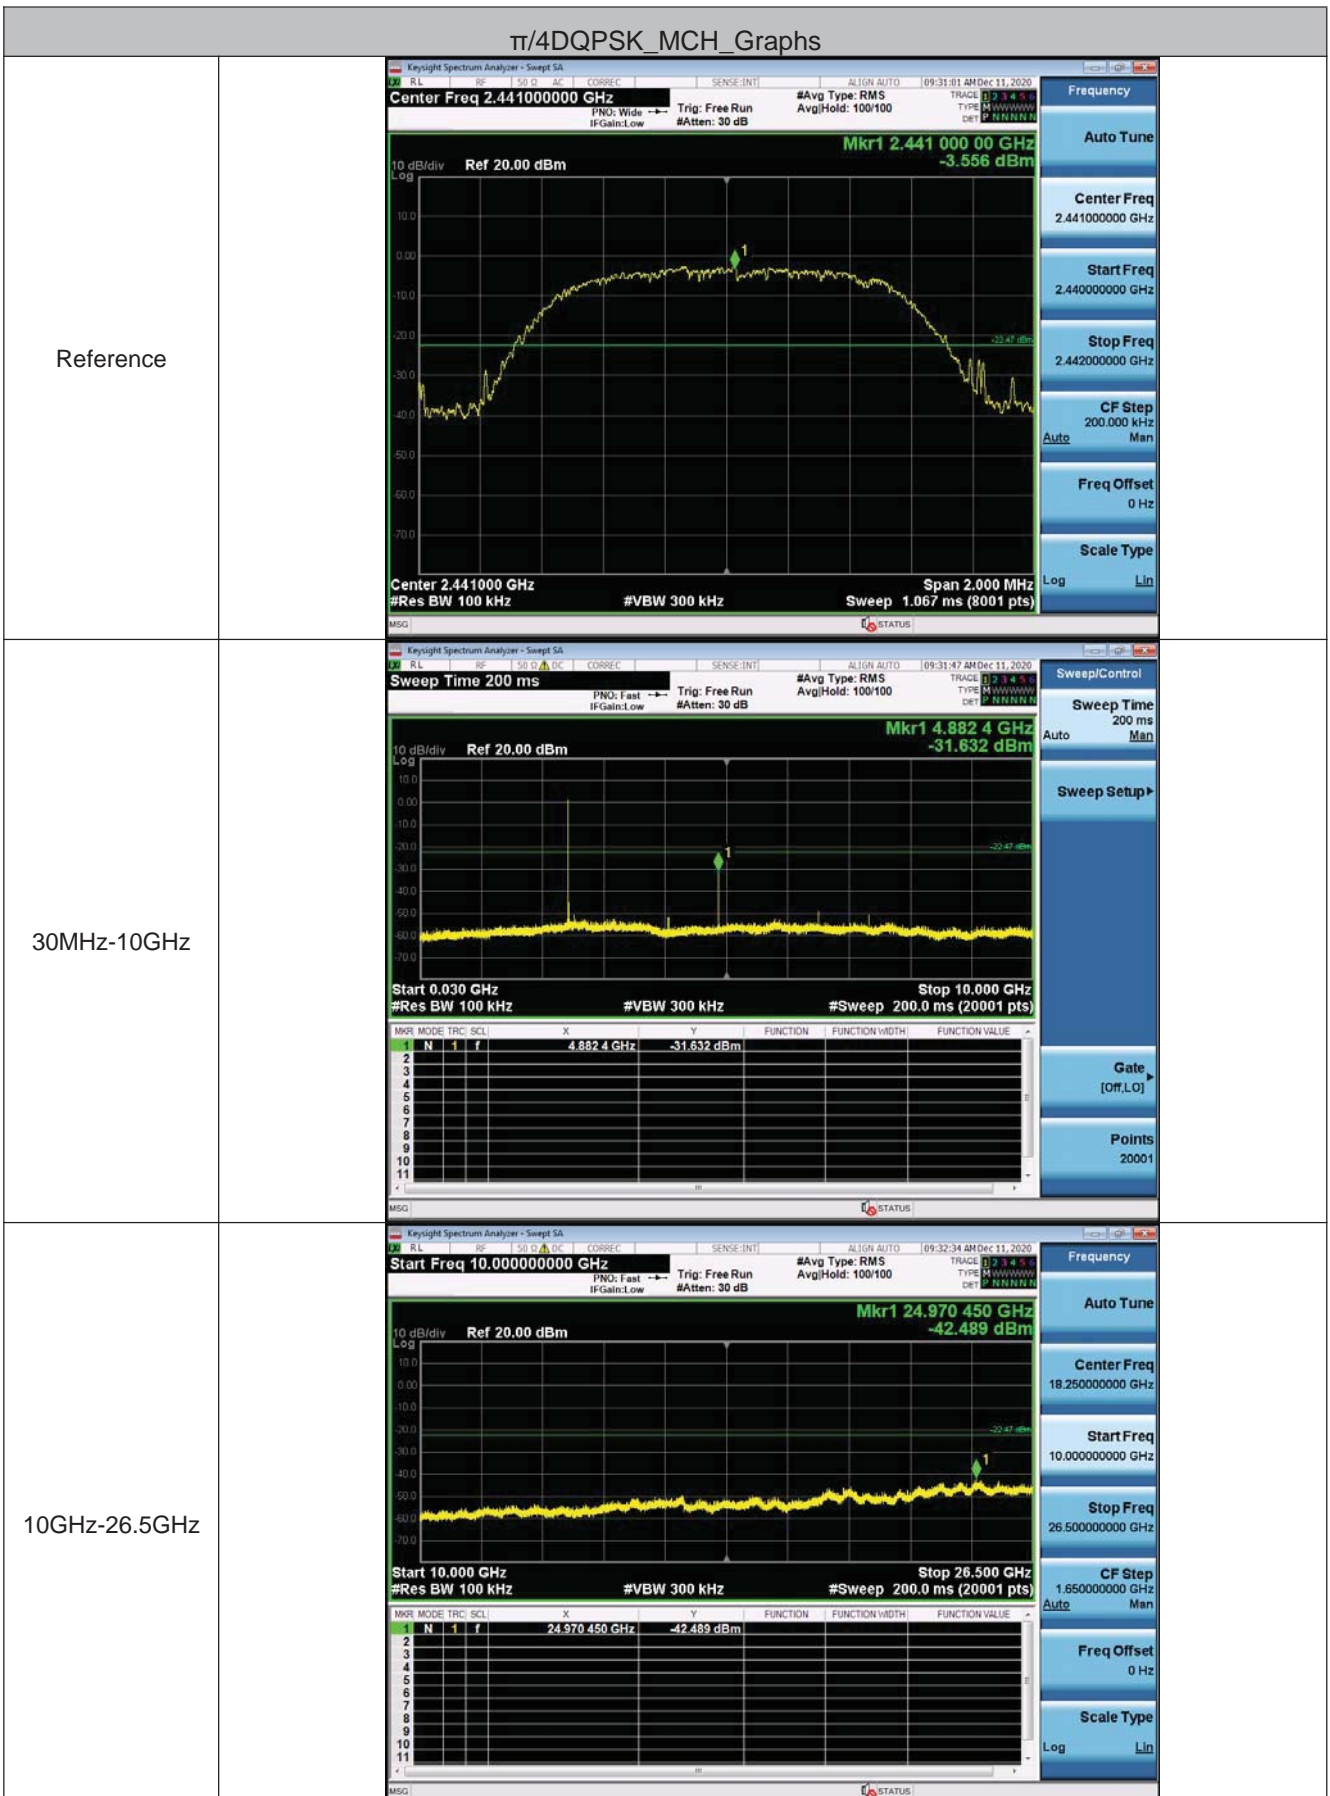

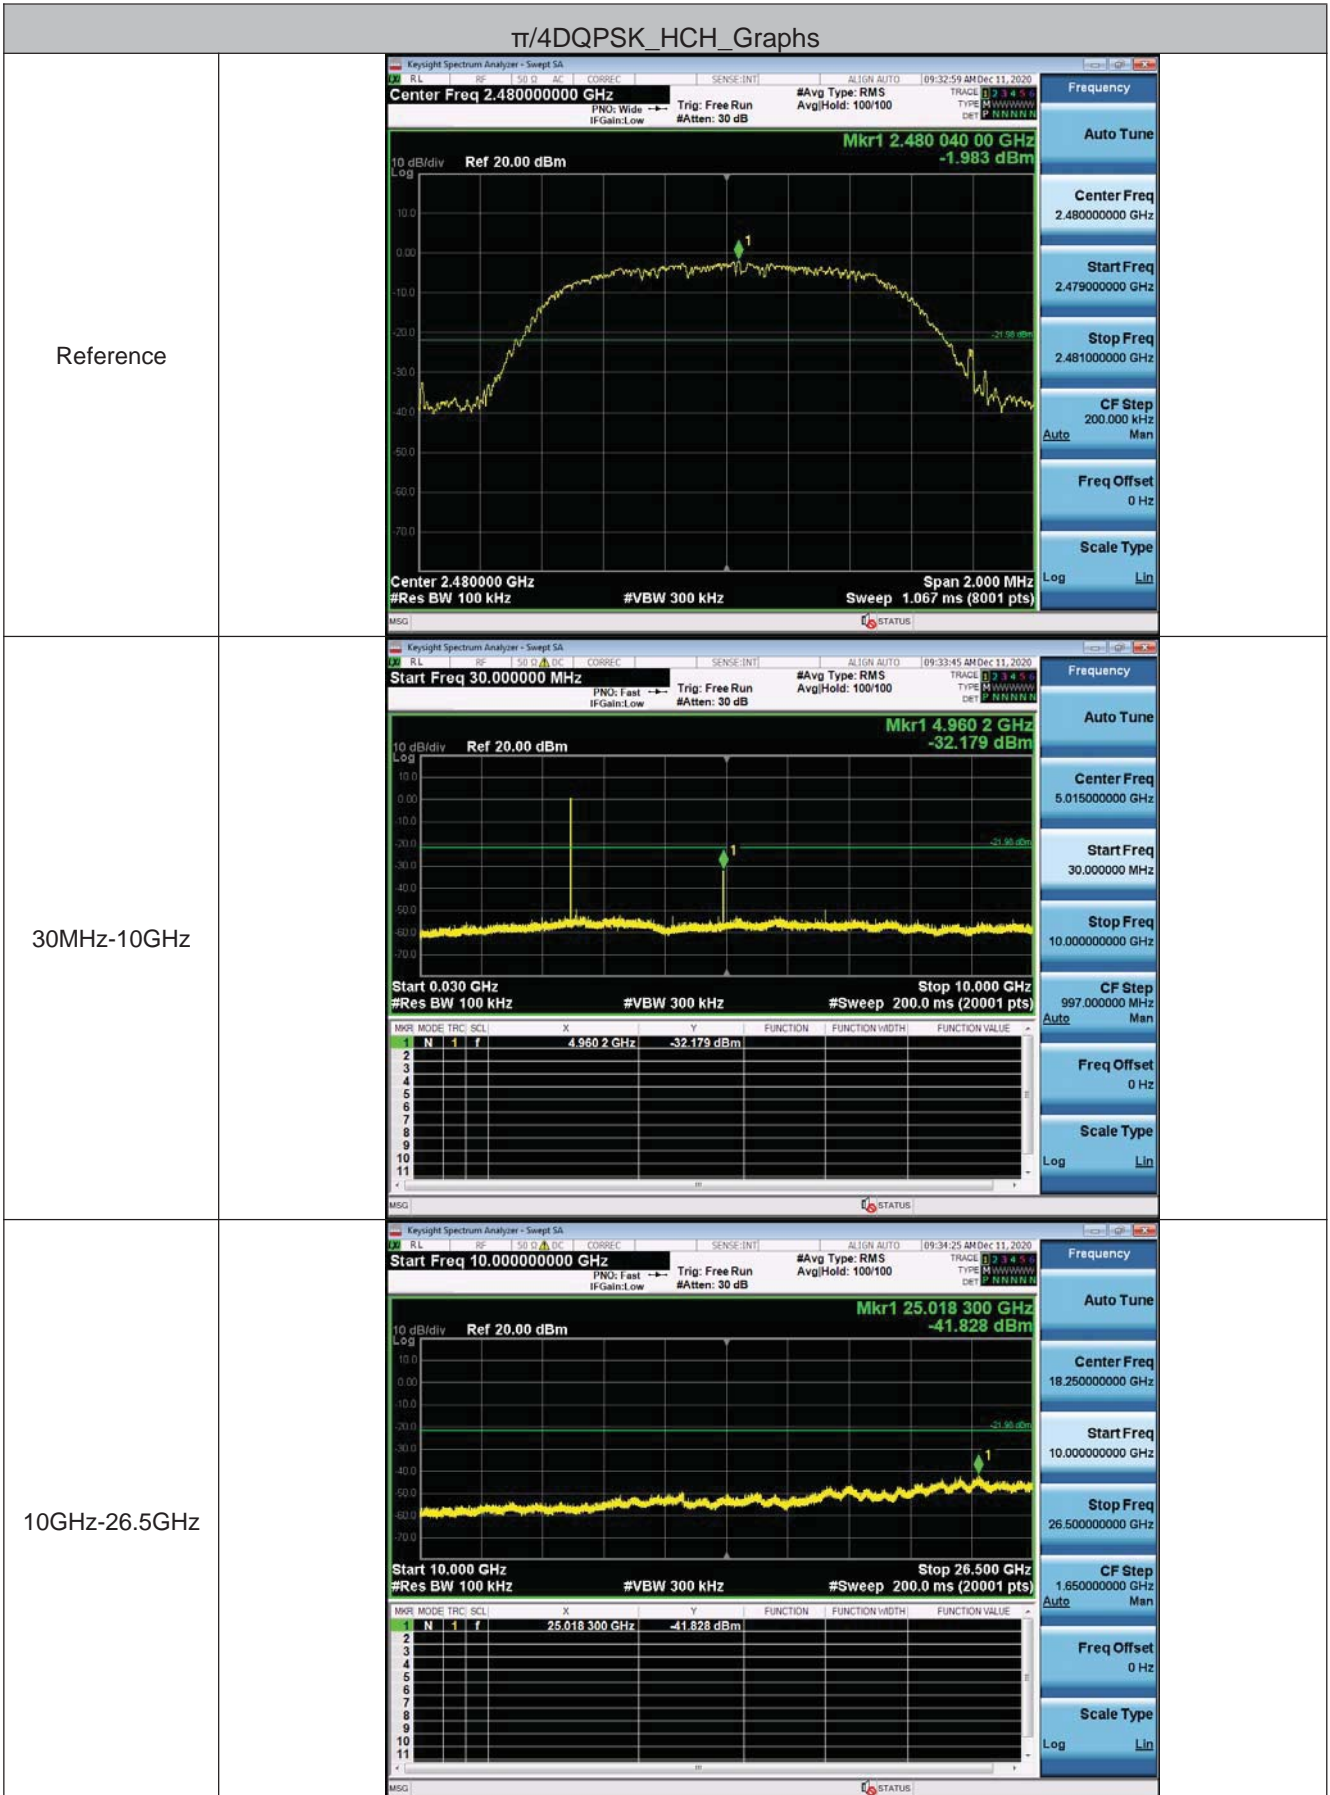



Remark:

Pre test 9kHz to 25GHz, find the highest point when testing, so only the worst data were shown in the test report. Per FCC Part 15.33 (a) and 15.31 (o) ,The amplitude of spurious emissions from intentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

### 5.10 Other requirements Frequency Hopping Spread Spectrum System

<b>Test Requirement:</b>	<b>47 CFR Part 15C Section 15.247 (a)(1), (h) requirement:</b>
--------------------------	--

The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.


Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.

The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

#### Compliance for section 15.247(a)(1)


According to Bluetooth Core Specification, the pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence:  $2^9 - 1 = 511$  bits
- Longest sequence of zeros: 8 (non-inverted signal)

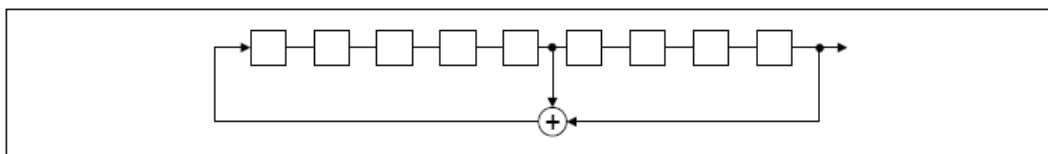

*Linear Feedback Shift Register for Generation of the PRBS sequence*

An example of Pseudorandom Frequency Hopping Sequence as follow:

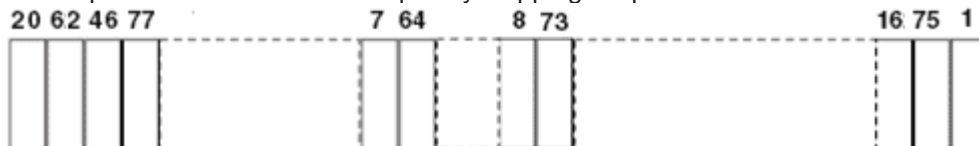

Each frequency used equally on the average by each transmitter.

According to Bluetooth Core Specification, Bluetooth receivers are designed to have input and IF bandwidths that match the hopping channel bandwidths of any Bluetooth transmitters and shift frequencies in synchronization with the transmitted signals.

#### Compliance for section 15.247(g)

According to Bluetooth Core Specification, the Bluetooth system transmits the packet with the pseudorandom hopping frequency with a continuous data and the short burst transmission from the Bluetooth system is also transmitted under the frequency hopping system with the pseudorandom hopping frequency system.

**Compliance for section 15.247(h)**

According to Bluetooth Core specification, the Bluetooth system incorporates with an adaptive system to detect other user within the spectrum band so that it individually and independently to avoid hopping on the occupied channels.

According to the Bluetooth Core specification, the Bluetooth system is designed not have the ability to coordinated with other FHSS System in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitter.

### 5.11 Radiated Spurious Emission & Restricted bands

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205				
Test Method:	ANSI C63.10: 2013				
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Peak	100 kHz	300kHz	Peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
Peak		1MHz	10Hz	Average	
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
<p>Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.</p>					

Test Setup:

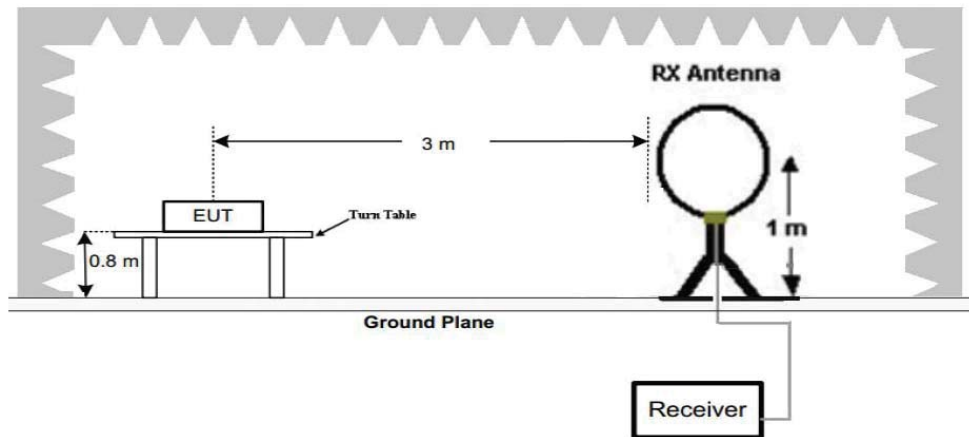


Figure 1. Below 30MHz

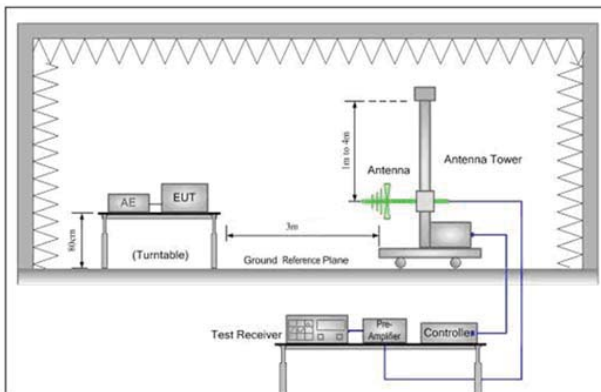


Figure 2. 30MHz to 1GHz

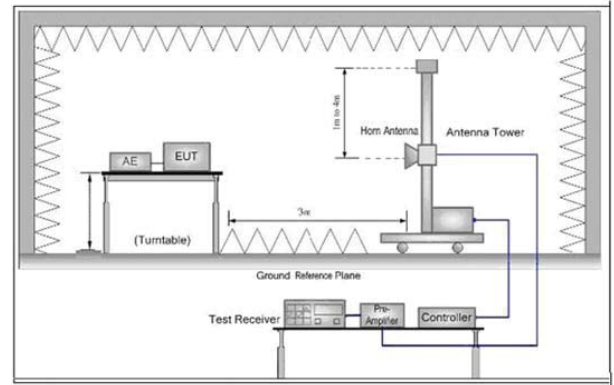


Figure 3. Above 1 GHz

Test Procedure:

- a. 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
  - 2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- Note: For the radiated emission test above 1GHz:  
 Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
  - c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

	<p>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p> <p>g. Test the EUT in the lowest channel (2402MHz),the middle channel (2441MHz),the Highest channel (2480MHz)</p> <p>h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.</p> <p>i. Repeat above procedures until all frequencies measured was complete.</p>
Exploratory Test Mode:	<p>Non-hopping transmitting mode with all kind of modulation and all kind of data type Transmitting mode, Charge + Transmitting mode.</p>
Final Test Mode:	<p>Through Pre-scan, find the DH5 of data type and GFSK modulation is the worst case. Pretest the EUT at Transmitting mode, AUX mode, FM(RX) mode and Transmitting mode, found the Charge + Transmitting mode which it is worse case For below 1GHz part, through pre-scan, the worst case is the lowest channel. Only the Charge + Transmitting mode and transmitting(battery) is recorded in the report.</p>
Test Results:	Pass

### 5.11.1 Radiated Emission below 1GHz

30MHz~1GHz		
Test mode:	Transmitting+charging	Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1	*	61.1316	52.12	-19.07	33.05	40.00	-6.95	QP			
2		73.6170	46.15	-18.95	27.20	40.00	-12.80	QP			
3		108.2667	48.83	-13.59	35.24	43.50	-8.26	QP			
4		131.7577	39.10	-12.51	26.59	43.50	-16.91	QP			
5		164.9075	43.56	-13.17	30.39	43.50	-13.11	QP			
6		176.8878	38.55	-14.08	24.47	43.50	-19.03	QP			

Remark:


The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,

Over Limit=Level-Limit Line.

Test mode:	Transmitting+charging	Horizontal
------------	-----------------------	------------

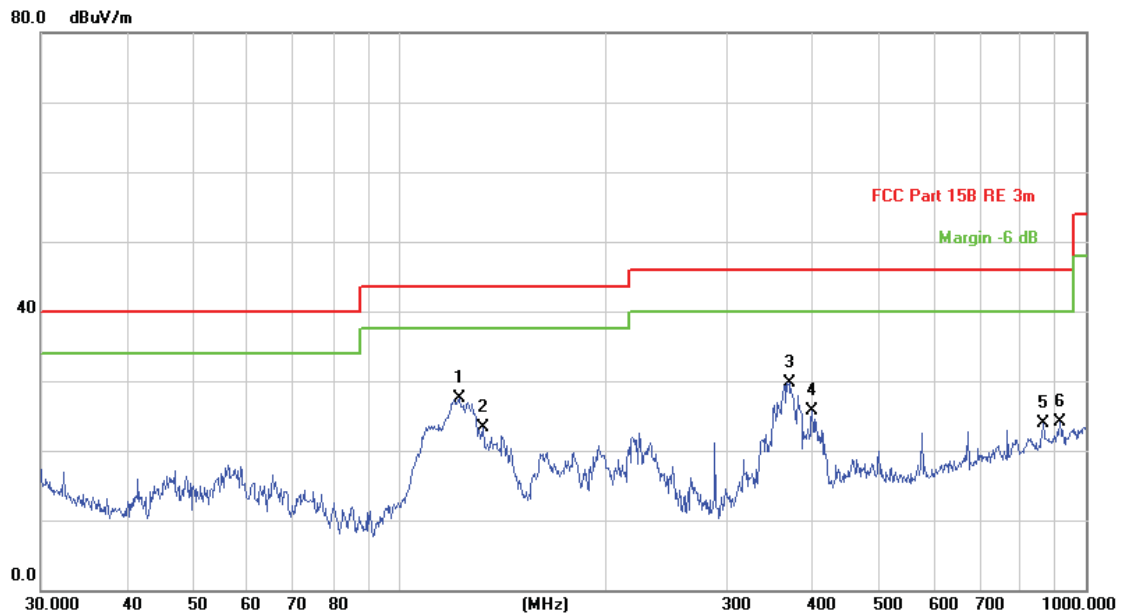

No.	Mk.	Freq. MHz	Reading	Correct	Measure-	Limit	Over	Antenna	Table	Comment
			Level dBuV	Factor dB/m	ment dBuV/m					
1	*	121.9755	40.12	-12.54	27.58	43.50	-15.92	QP		
2		132.2208	35.97	-12.73	23.24	43.50	-20.28	QP		
3		389.4047	39.23	-9.44	29.79	46.00	-16.21	QP		
4		399.0302	34.28	-8.81	25.65	46.00	-20.35	QP		
5		866.0879	23.99	-0.14	23.85	46.00	-22.15	QP		
6		916.0687	23.81	0.35	24.16	46.00	-21.84	QP		

Remark:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Pre-amplifier. The basic equation with a sample calculation is as follows:

Factor = Antenna Factor + Cable Factor - Pre-amplifier Factor,

Level = Read Level + Factor,

Over Limit = Level - Limit Line.



30MHz~1GHz		
Test mode:	Transmitting(battery)	Vertical



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		30.0000	20.28	-7.51	12.77	40.00	-27.23	QP		
2		52.2079	36.15	-16.77	19.38	40.00	-20.62	QP		
3		62.8708	34.34	-17.15	17.19	40.00	-22.81	QP		
4		383.9318	30.52	-8.38	22.14	46.00	-23.86	QP		
5		480.5276	33.94	-4.78	29.16	46.00	-16.84	QP		
6	*	768.7481	27.20	4.39	31.59	46.00	-14.41	QP		

Remark:


The field strength is calculated by adding the Antenna Factor, Cable Factor & Pre-amplifier. The basic equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Pre-amplifier Factor,

Level = Read Level + Factor,

Over Limit=Level-Limit Line.

Test mode:	Transmitting(battery)	Horizontal
------------	-----------------------	------------

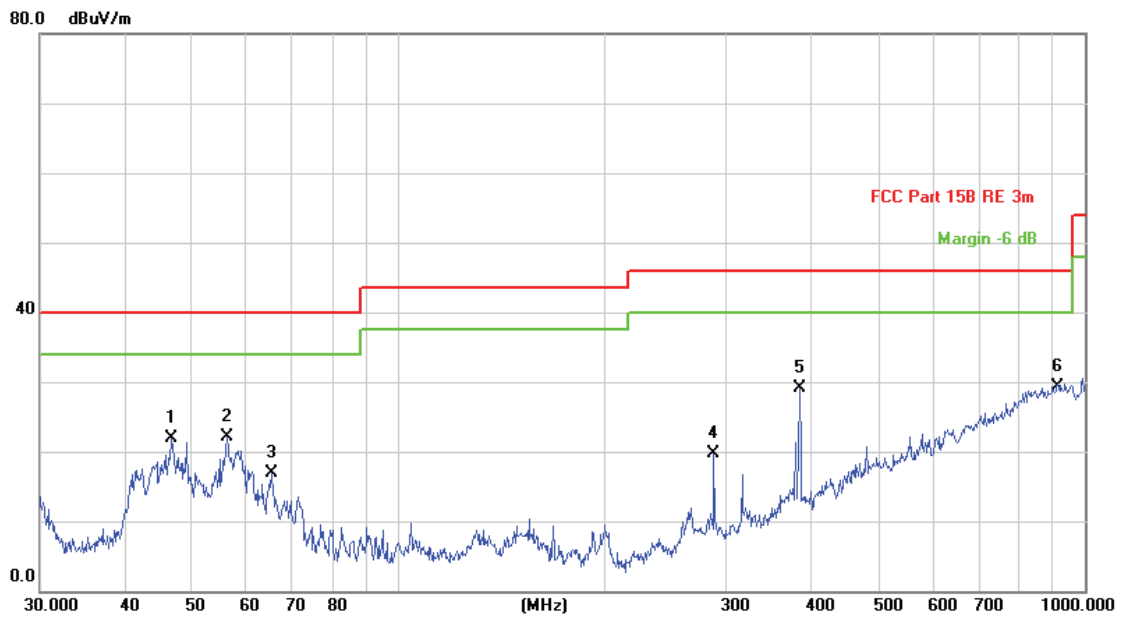

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		46.6664	37.81	-15.85	21.96	40.00	-18.04	QP			
2		56.1974	38.84	-16.81	22.03	40.00	-17.97	QP			
3		65.3432	34.34	-17.52	16.82	40.00	-23.18	QP			
4		287.9904	32.22	-12.54	19.68	46.00	-26.32	QP			
5		383.9318	37.57	-8.38	29.19	46.00	-16.81	QP			
6	*	909.6667	21.94	7.42	29.36	46.00	-16.64	QP			

Remark:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,

Over Limit=Level-Limit Line.

### 5.11.2 Transmitter Emission above 1GHz

Worse case mode:		GFSK(DH5)		Test channel:		Lowest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)		H/V
<b>2390</b>	58.58	-9.2	49.38	74	-24.62	<b>Peak</b>	<b>H</b>
2400	59.13	-9.39	49.74	74	-24.26	Peak	H
4804	56.41	-4.33	52.08	74	-21.92	Peak	H
7206	52.48	1.01	53.49	74	-20.51	Peak	H
<b>2390</b>	57.19	-9.2	47.99	74	-26.01	<b>Peak</b>	<b>V</b>
2400	57.74	-9.39	48.35	74	-25.65	Peak	V
4804	56.69	-4.33	52.36	74	-21.64	Peak	V
7206	53.06	1.01	54.07	74	-19.93	Peak	V

Worse case mode:		GFSK(DH5)		Test channel:		Middle	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)		H/V
4882	54.82	-4.11	50.71	74	-23.29	peak	H
7323	49.13	1.51	50.64	74	-23.36	peak	H
4882	56.19	-4.11	52.08	74	-21.92	peak	V
7323	49.14	1.51	50.65	74	-23.35	peak	V

Worse case mode:		GFSK(DH5)		Test channel:		Highest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)		H/V
<b>2483.5</b>	54.99	-9.29	45.70	74	-28.30	<b>Peak</b>	<b>H</b>
4960	53.65	-4.04	49.61	74	-24.39	Peak	H
7440	50.22	1.57	51.79	74	-22.21	Peak	H
<b>2483.5</b>	55.61	-9.29	46.32	74	-27.68	<b>Peak</b>	<b>V</b>
4960	54.46	-4.04	50.42	74	-23.58	Peak	V
7440	48.84	1.57	50.41	74	-23.59	Peak	V

Worse case mode:		π/4DQPSK (2DH5)		Test channel:		Lowest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
<b>2390</b>	57.07	-9.2	47.87	74	-26.13	<b>Peak</b>	<b>H</b>
2400	59.14	-9.39	49.75	74	-24.25	Peak	H
4804	55.27	-4.33	50.94	74	-23.06	Peak	H
7206	52.49	1.01	53.50	74	-20.50	Peak	H
<b>2390</b>	57.39	-9.2	48.19	74	-25.81	<b>Peak</b>	<b>V</b>
2400	58.75	-9.39	49.36	74	-24.64	Peak	V
4804	55.98	-4.33	51.65	74	-22.35	Peak	V
7206	52.29	1.01	53.30	74	-20.70	Peak	V

Worse case mode:		π/4DQPSK (2DH5)		Test channel:		Middle	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
4882	56.25	-4.11	52.14	74	-21.86	peak	H
7323	48.43	1.51	49.94	74	-24.06	peak	H
4882	55.35	-4.11	51.24	74	-22.76	peak	V
7323	49.65	1.51	51.16	74	-22.84	peak	V

Worse case mode:		π/4DQPSK (2DH5)		Test channel:		Highest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
<b>2483.5</b>	54.79	-9.29	45.50	74	-28.50	<b>Peak</b>	<b>H</b>
4960	54.17	-4.04	50.13	74	-23.87	Peak	H
7440	49.72	1.57	51.29	74	-22.71	Peak	H
<b>2483.5</b>	55.50	-9.29	46.21	74	-27.79	<b>Peak</b>	<b>V</b>
4960	53.03	-4.04	48.99	74	-25.01	Peak	V
7440	50.54	1.57	52.11	74	-21.89	Peak	V

Remark:

- The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:  
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- Scan from 9kHz to 25GHz, the disturbance above 10GHz and below 30MHz was very low. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.


## 6 Photographs - EUT Test Setup

Please see test setup file

**30MHz~1GHz:**



**9kHz~30MHz:**

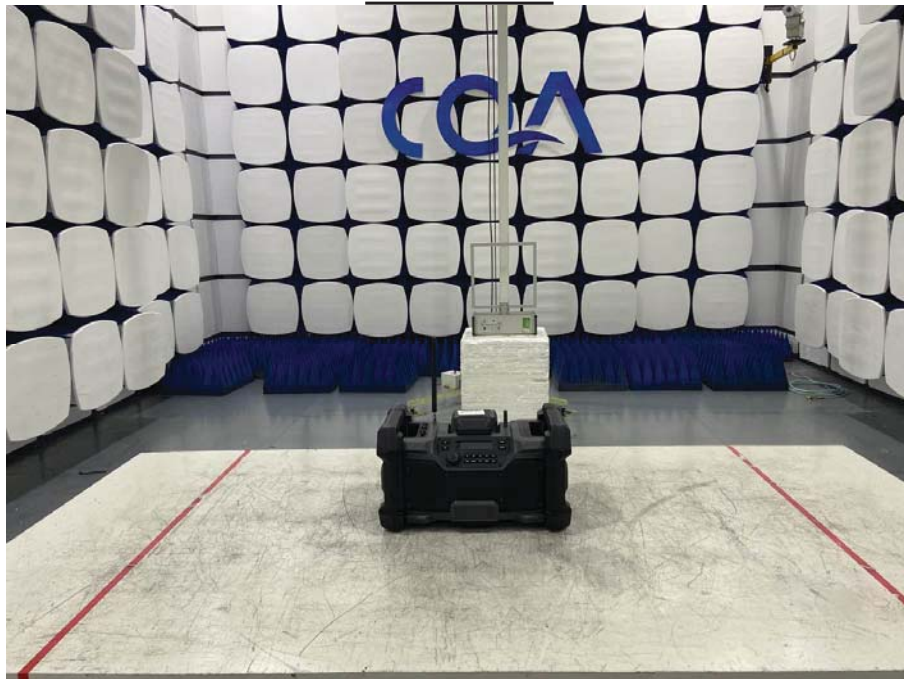

**Above 1GHz:**




**Conducted emission Test Setup**



## 7 Photographs - EUT Constructional Details

### External Photos



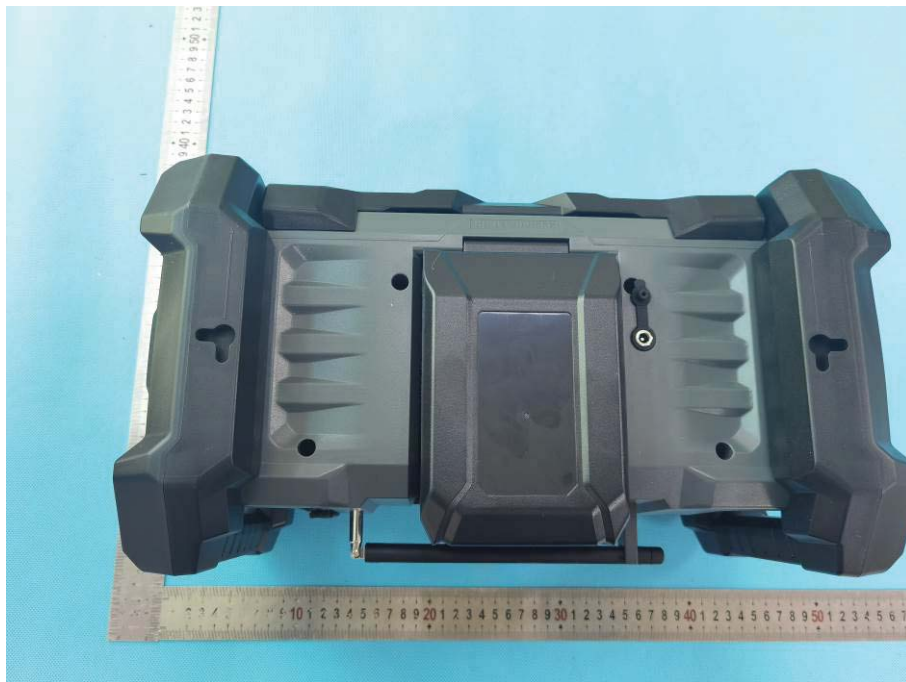


















Internal Photos

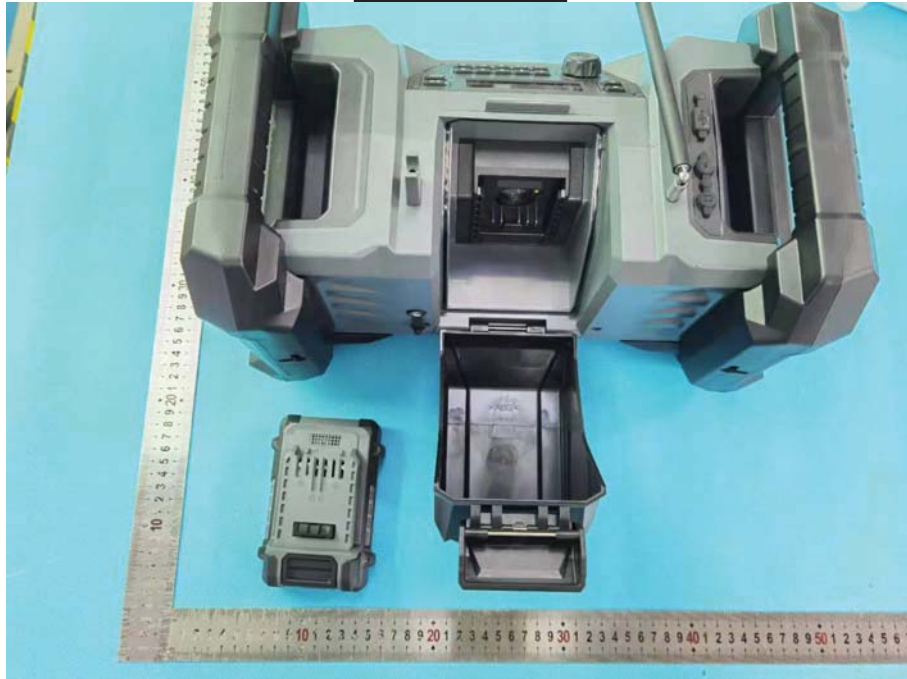

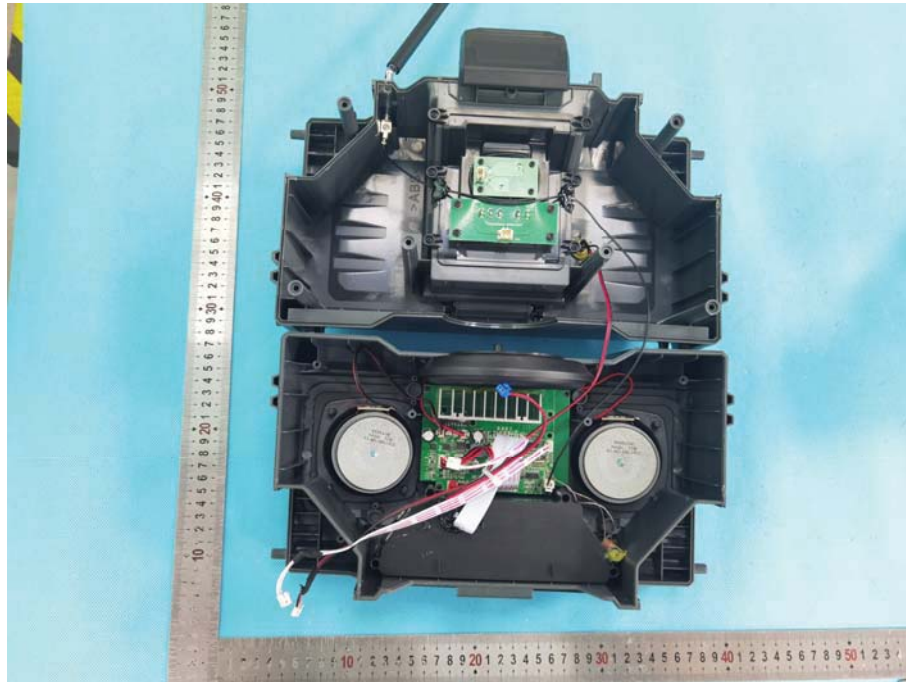
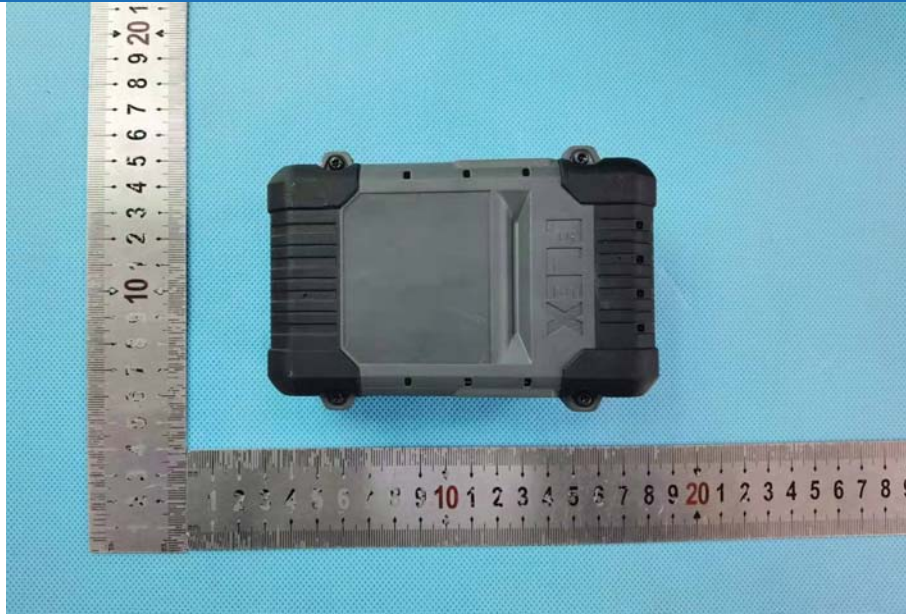


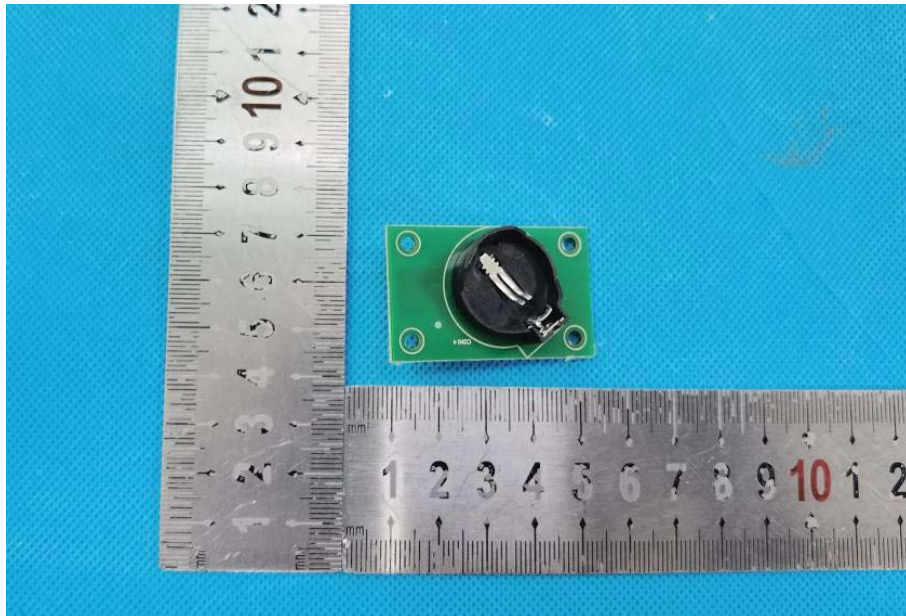
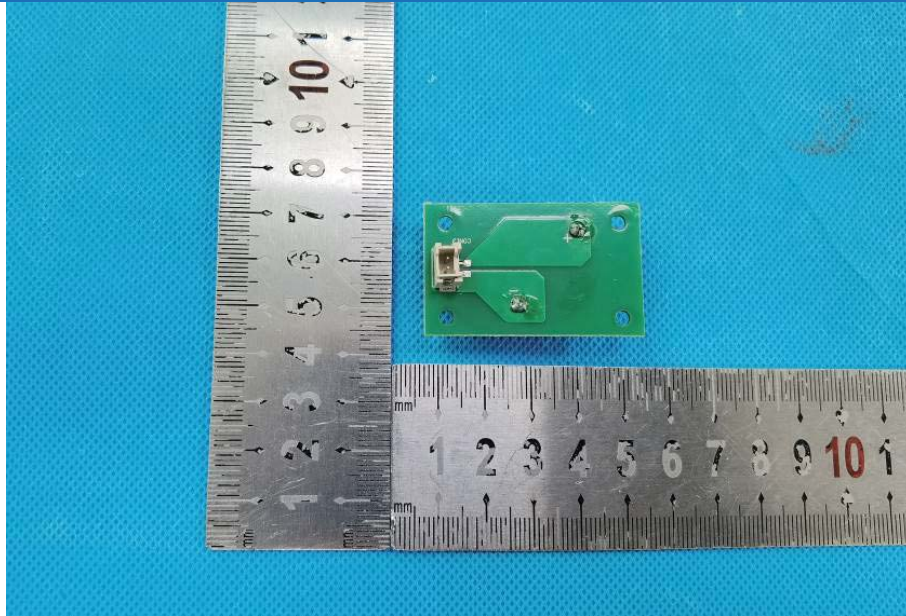


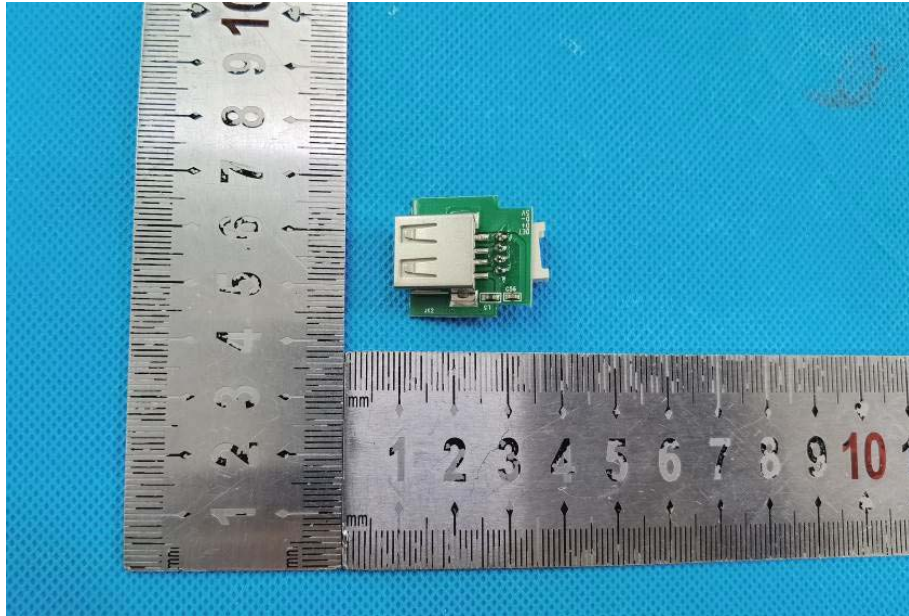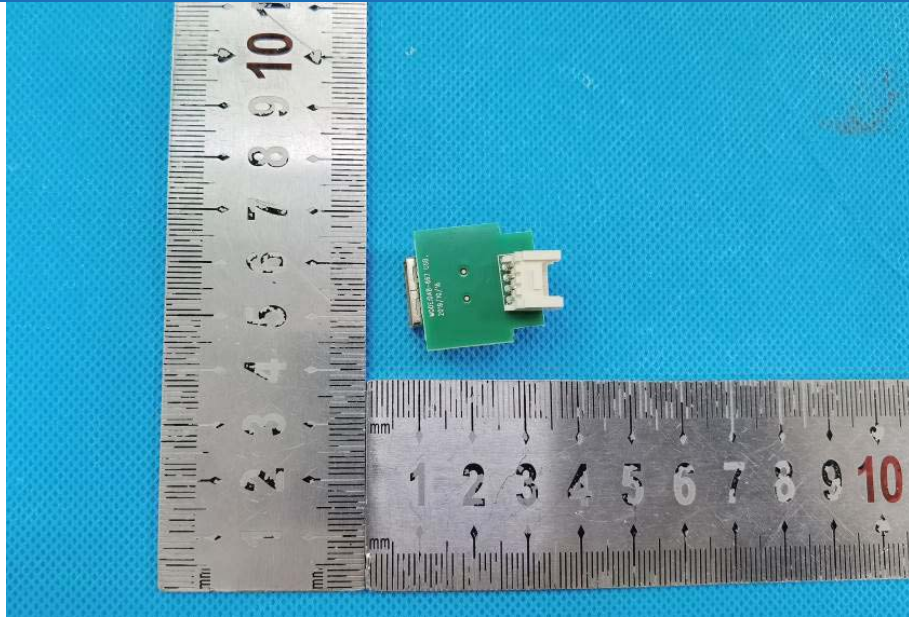


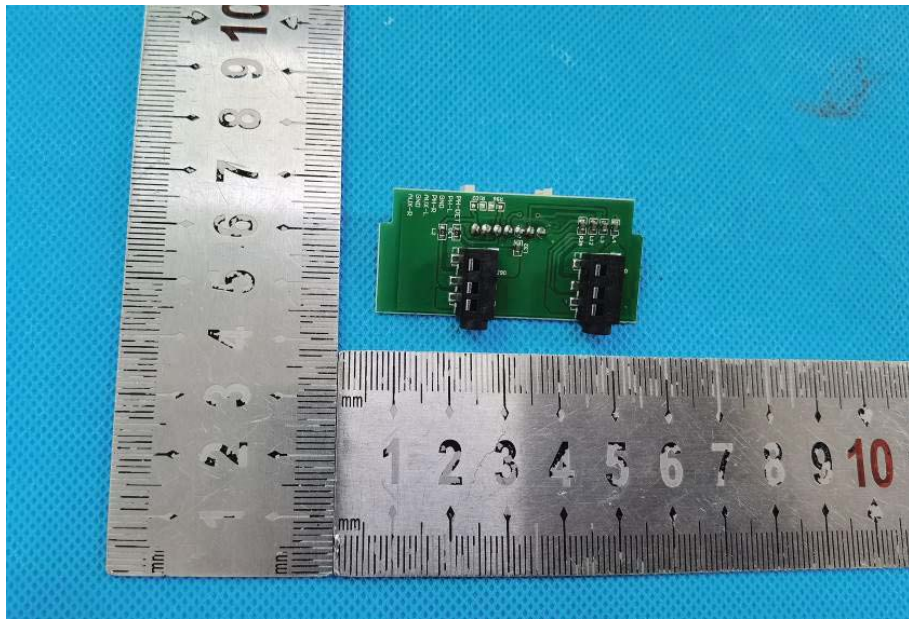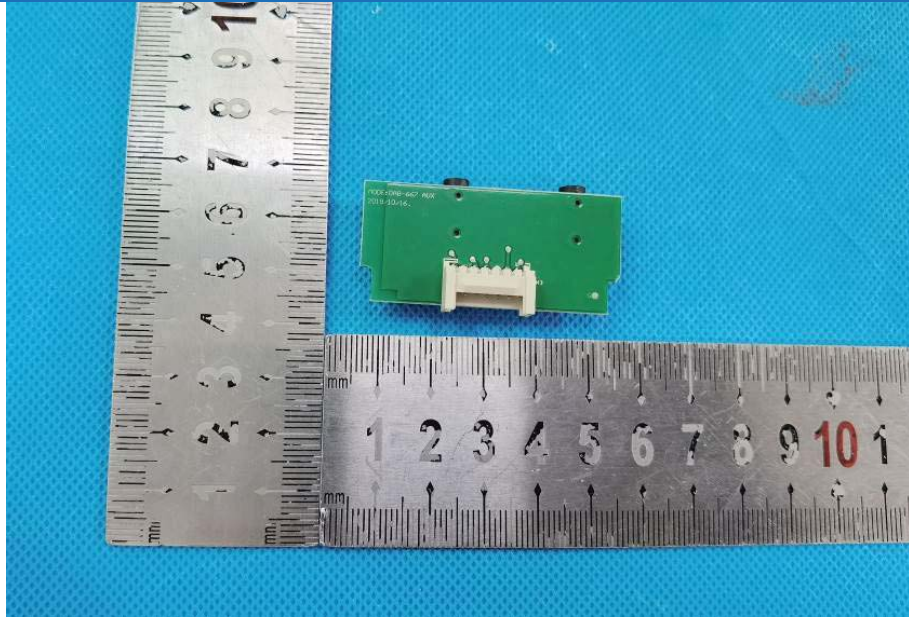



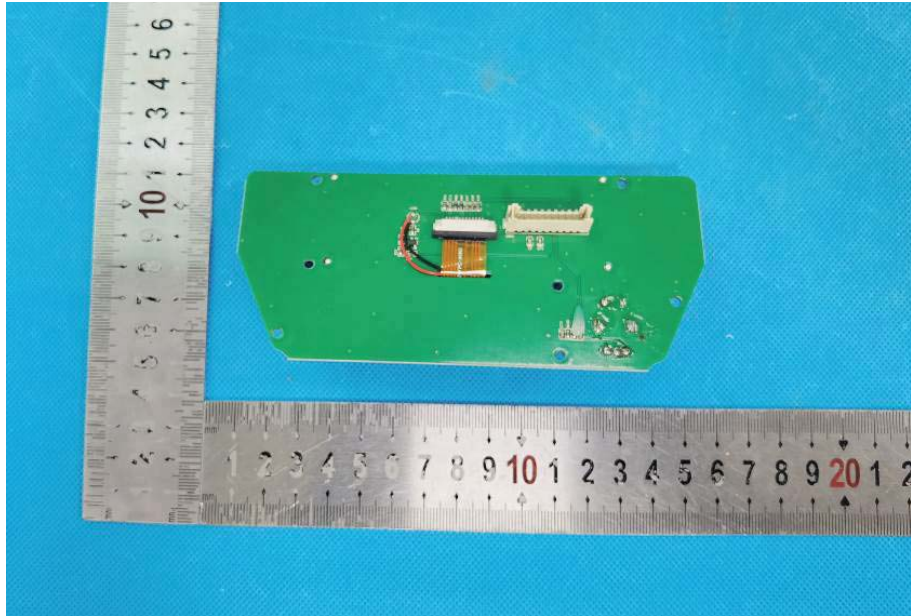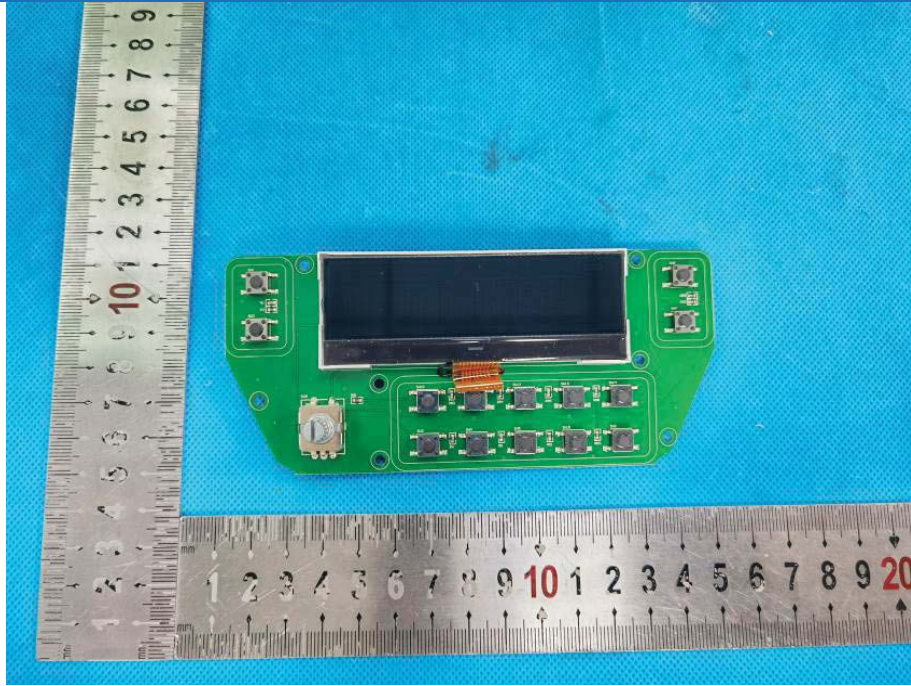

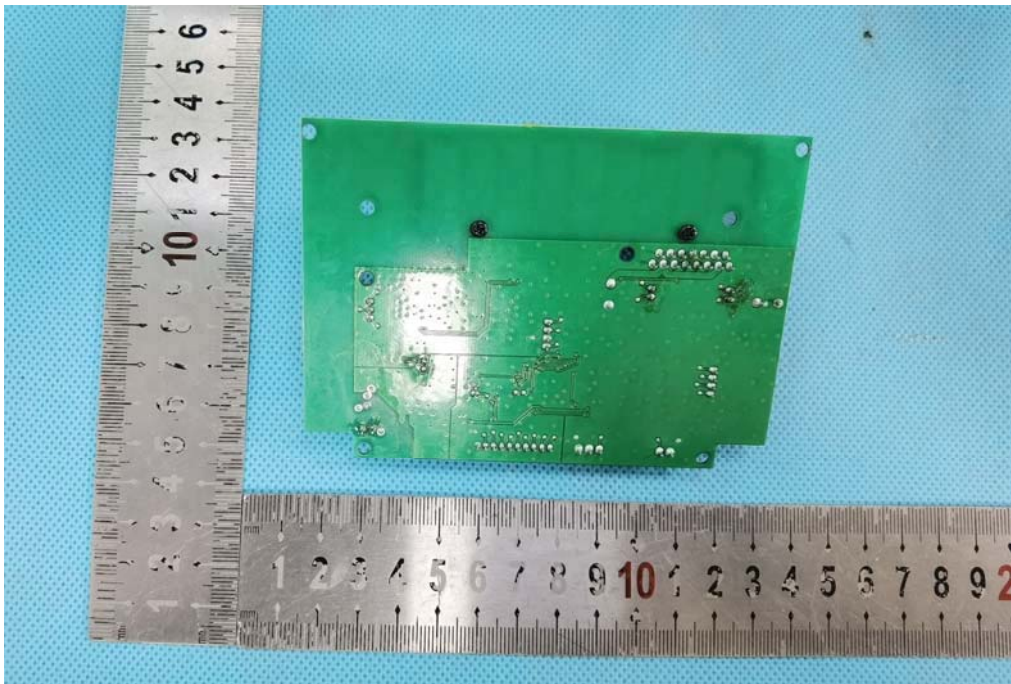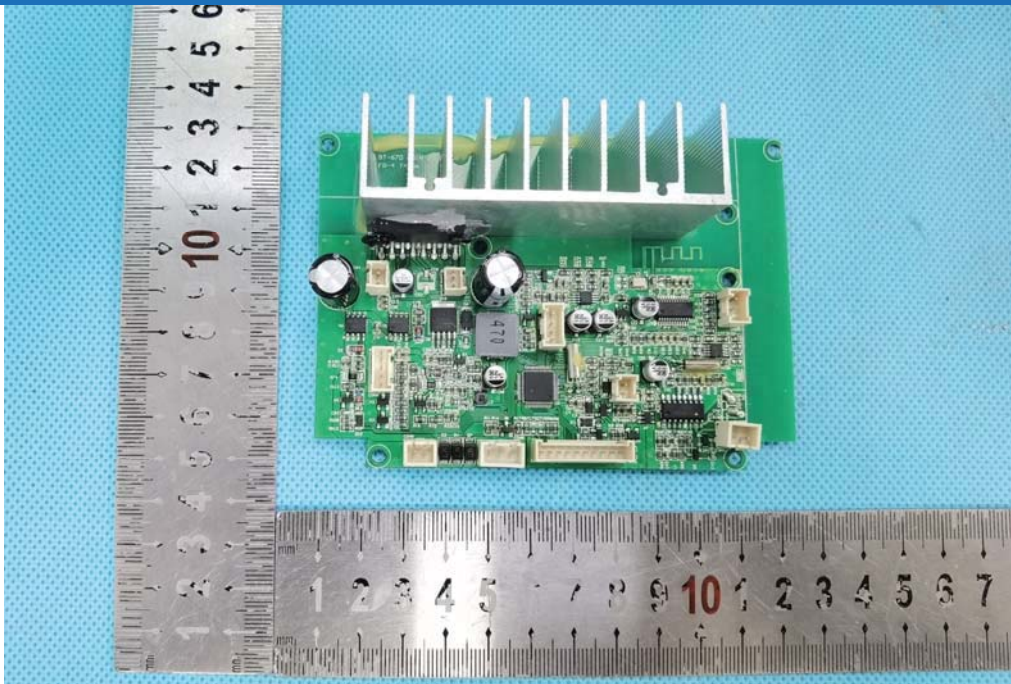

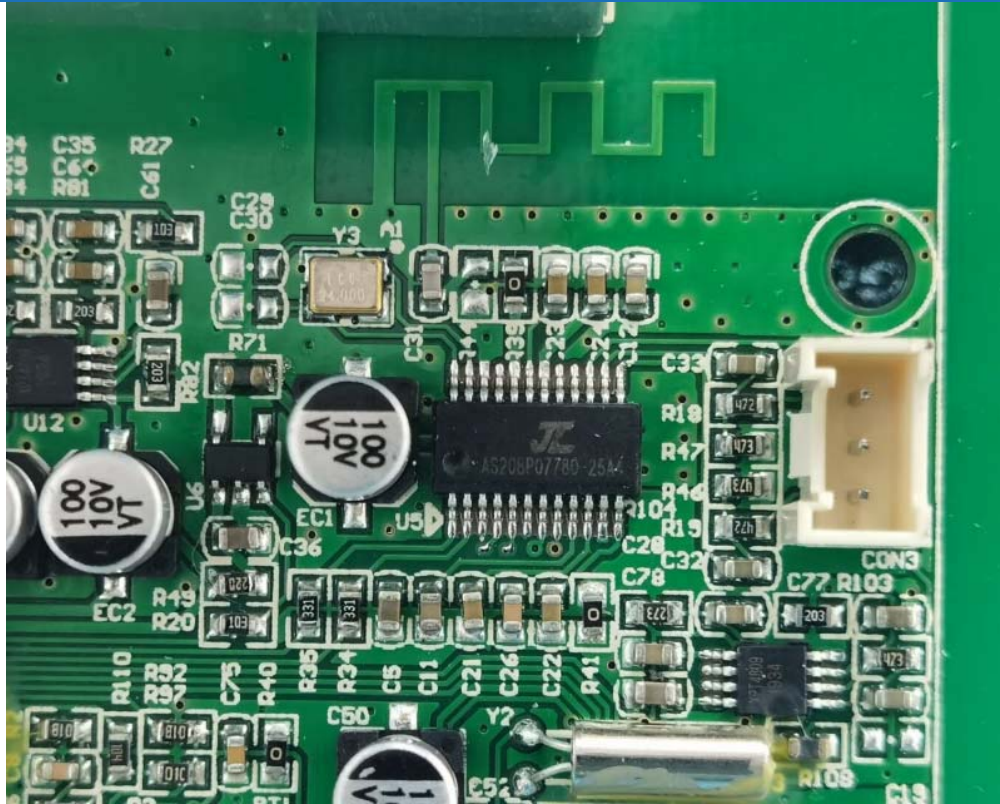

The End