



FCC TEST REPORT (PART 22)

REPORT NO.: RF990819C03-2

MODEL NO.: Algiz7;Algiz7-XXX (X=A~Z , a~z , 0 ~9 ,
Blank or Slash) (refer to item 3.1 for more detail)

FCC ID: YY3-01120709267

RECEIVED: Aug. 19, 2010

TESTED: Sep. 07 ~ Oct. 18, 2010

ISSUED: Feb. 08, 2011

APPLICANT: HHCS HANDHELD COMPUTER SPECIALISTS
AB

ADDRESS: Kinnegatan 17 A,S-531 33 Lidkoping,Sweden

ISSUED BY: Bureau Veritas Consumer Products Services
(H.K.) Ltd., Taoyuan Branch

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou
Hsiang, Taipei Hsien 244, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei
Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This test report consists of 95 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by TAF or any government agencies. The test results in the report only apply to the tested sample.





TABLE OF CONTENTS

| | |
|---|----|
| RELEASE CONTROL RECORD | 4 |
| 1 CERTIFICATION | 5 |
| 2 SUMMARY OF TEST RESULTS | 6 |
| 2.1 MEASUREMENT UNCERTAINTY | 6 |
| 3 GENERAL INFORMATION..... | 7 |
| 3.1 GENERAL DESCRIPTION OF EUT..... | 7 |
| 3.2 DESCRIPTION OF TEST MODES..... | 9 |
| 3.2.1 CONFIGURATION OF SYSTEM UNDER TEST | 10 |
| 3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL..... | 11 |
| 3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS | 17 |
| 3.4 DESCRIPTION OF SUPPORT UNITS | 17 |
| 4 TEST TYPES AND RESULTS..... | 18 |
| 4.1 OUTPUT POWER MEASUREMENT | 18 |
| 4.1.1 LIMITS OF OUTPUT POWER MEASUREMENT..... | 18 |
| 4.1.2 TEST INSTRUMENTS | 19 |
| 4.1.3 TEST PROCEDURES..... | 20 |
| 4.1.4 TEST SETUP | 21 |
| 4.1.5 EUT OPERATING CONDITIONS..... | 21 |
| 4.1.6 TEST RESULTS | 22 |
| 4.2 FREQUENCY STABILITY MEASUREMENT | 30 |
| 4.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT..... | 30 |
| 4.2.2 TEST INSTRUMENTS | 30 |
| 4.2.3 TEST PROCEDURE | 31 |
| 4.2.4 TEST SETUP | 31 |
| 4.2.5 TEST RESULTS | 32 |
| 4.3 OCCUPIED BANDWIDTH MEASUREMENT..... | 35 |
| 4.3.1 LIMITS OF OCCUPIED BANDWIDTH MEASUREMENT..... | 35 |
| 4.3.2 TEST INSTRUMENTS | 35 |
| 4.3.3 TEST SETUP | 35 |
| 4.3.4 TEST PROCEDURES..... | 36 |
| 4.3.5 EUT OPERATING CONDITION | 36 |
| 4.3.6 TEST RESULTS | 37 |
| 4.4 BAND EDGE MEASUREMENT | 45 |
| 4.4.1 LIMITS OF BAND EDGE MEASUREMENT..... | 45 |
| 4.4.2 TEST INSTRUMENTS | 45 |
| 4.4.3 TEST SETUP | 45 |
| 4.4.4 TEST PROCEDURES..... | 46 |
| 4.4.5 EUT OPERATING CONDITION | 46 |
| 4.4.6 TEST RESULTS | 47 |
| 4.5 CONDUCTED SPURIOUS EMISSIONS..... | 55 |
| 4.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT..... | 55 |
| 4.5.2 TEST INSTRUMENTS | 55 |
| 4.5.3 TEST PROCEDURE | 56 |
| 4.5.4 TEST SETUP | 56 |
| 4.5.5 EUT OPERATING CONDITIONS..... | 56 |
| 4.5.6 TEST RESULTS | 57 |
| 4.6 RADIATED EMISSION MEASUREMENT (BELOW 1GHZ)..... | 75 |
| 4.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT..... | 75 |
| 4.6.2 TEST INSTRUMENTS | 75 |
| 4.6.3 TEST PROCEDURES..... | 76 |



A D T

| | | |
|-------|--|----|
| 4.6.4 | DEVIATION FROM TEST STANDARD | 76 |
| 4.6.5 | TEST SETUP | 77 |
| 4.6.6 | EUT OPERATING CONDITIONS | 77 |
| 4.6.7 | TEST RESULTS | 78 |
| 4.7 | RADIATED EMISSION MEASUREMENT (ABOVE 1GHZ)..... | 81 |
| 4.7.1 | LIMITS OF RADIATED EMISSION MEASUREMENT | 81 |
| 4.7.2 | TEST INSTRUMENTS | 81 |
| 4.7.3 | TEST PROCEDURES | 82 |
| 4.7.4 | DEVIATION FROM TEST STANDARD | 82 |
| 4.7.5 | TEST SETUP | 83 |
| 4.7.6 | EUT OPERATING CONDITIONS | 83 |
| 4.7.7 | TEST RESULTS | 84 |
| 5 | PHOTOGRAPHS OF THE TEST CONFIGURATION..... | 93 |
| 6 | INFORMATION ON THE TESTING LABORATORIES | 94 |
| 7 | APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB..... | 95 |



A D T

RELEASE CONTROL RECORD

| ISSUE NO. | REASON FOR CHANGE | DATE ISSUED |
|------------------|-------------------|---------------|
| Original release | N/A | Feb. 08, 2011 |



1 CERTIFICATION

PRODUCT: 7 Rugged Tablet PC

MODEL: Algiz7;Algiz7-XXX (X=A~Z , a~z , 0 ~9 , Blank or Slash)
(refer to item 3.1 for more detail)

BRAND: Handheld

APPLICANT: HHCS HANDHELD COMPUTER SPECIALISTS AB

TESTED: Sep. 07 ~ Oct. 18, 2010

TEST SAMPLE: ENGINEERING SAMPLE

STANDARDS: FCC Part 22, Subpart H
ANSI C63.4-2003

The above equipment (model: Algiz7) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY :  , DATE : Feb. 08, 2011
Andrea Hsia / Specialist

APPROVED BY :  , DATE : Feb. 08, 2011
Gary Chang / Assistant Manager

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

| APPLIED STANDARD: FCC Part 22 & Part 2 | | | |
|--|--|--------|--|
| STANDARD SECTION | TEST TYPE AND LIMIT | RESULT | REMARK |
| 2.1046 22.913 (a) | Maximum Peak Output Power Limit: max. 7 watts e.r.p peak power | PASS | Meet the requirement of limit. Minimum passing margin is 23.5dBm at 824.2MHz. |
| 2.1055 | Frequency Stability AFC Freq. Error vs. Voltage AFC Freq. Error vs. Temperature Limit: max. ± 2.5 ppm | PASS | Meet the requirement of limit. |
| 2.1049 (h) | Occupied Bandwidth | PASS | Meet the requirement of limit. |
| 22.917 | Band Edge Measurements | PASS | Meet the requirement of limit. |
| 2.1051 22.917 | Conducted Spurious Emissions | PASS | Meet the requirement of limit. |
| 2.1053 22.917 | Radiated Spurious Emissions | PASS | Meet the requirement of limit. Minimum passing margin is -12.9dB at 2509.8MHz. |

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

| MEASUREMENT | FREQUENCY | UNCERTAINTY |
|---------------------|-----------------|-------------|
| Conducted emissions | 9kHz~30MHz | 2.44 dB |
| Radiated emissions | 30MHz ~ 200MHz | 3.34 dB |
| | 200MHz ~1000MHz | 3.35 dB |
| | 1GHz ~ 18GHz | 2.26 dB |
| | 18GHz ~ 40GHz | 1.94 dB |

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

| | | |
|--------------------------|---|----------------------|
| EUT | 7 Rugged Tablet PC | |
| MODEL NO. | Algiz7;Algiz7-XXX (X=A~Z , a~z , 0 ~9 , Blank or Slash) | |
| FCC ID | YY3-01120709267 | |
| NOMINAL VOLTAGE | 12Vdc (adapter) 7.4Vdc (Battery) | |
| MODULATION TYPE | GPRS, E-GPRS | GMSK, 8PSK |
| | CDMA | QPSK, OQPSK, HPSK |
| | WCDMA | BPSK |
| FREQUENCY RANGE | GPRS, E-GPRS | 824.2MHz ~ 848.8MHz |
| | CDMA | 824.7MHz ~ 848.31MHz |
| | WCDMA | 826.4MHz ~ 846.6MHz |
| NUMBER OF CHANNEL | GPRS, E-GPRS | 124 |
| | CDMA | 788 |
| | WCDMA | 102 |
| MAX. ERP POWER | GPRS | 0.2213Watt |
| | E-GPRS | 0.0767Watt |
| | CDMA | 0.0462Watt |
| | WCDMA | 0.0335Watt |
| ANTENNA TYPE | Printed PCB antenna with -4.688dBi gain | |
| I/O PORTS | Refer to user's manual | |
| DATA CABLE | NA | |
| ACCESSORY DEVICES | Adapter, Battery | |

NOTE:

1. The EUT is a 7 Rugged Tablet PC. The test data are separated into following test reports

| | TEST STANDARD | REFERENCE REPORT |
|-------------------------------|------------------------|------------------|
| WLAN 802.11b/g/n | FCC Part 15, Subpart C | RF990819C03 |
| BLUETOOTH | FCC Part 15, Subpart C | RF990819C03-1 |
| GPRS/ CDMA/ WCDMA 850 | FCC Part 22 | RF990819C03-2 |
| GPRS/ CDMA/ WCDMA 1900 | FCC Part 24 | RF990819C03-3 |

2. The EUT was powered by the following adapter & battery:

| ADAPTER | |
|--------------------|---|
| BRAND: | EDAC |
| MODEL: | EA1050C-120 |
| INPUT: | 100-240Vac, 50/60Hz, 1.8A |
| OUTPUT: | 12Vdc, 4.16A |
| POWER LINE: | AC: 1.8m non-shielded cable with one core DC: 1.8m shielded cable without core |
| BATTERY | |
| RATING: | 7.4Vdc 2S1P, 2600mAh |



A D T

3. The EUT has no voice function.
4. Hardware version: I983S
5. Software version: V3.0.1.6
6. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

FOR GPRS & E-GPRS:

124 channels are provided to this EUT. Therefore, the low, middle and high channels are chosen for testing.

| | CHANNEL | FREQUENCY | TX MODE |
|--------|---------|-----------|--------------|
| LOW | 128 | 824.2 MHz | GPRS, E-GPRS |
| MIDDLE | 190 | 836.6 MHz | GPRS, E-GPRS |
| HIGH | 251 | 848.8 MHz | GPRS, E-GPRS |

NOTE:

1. Below 1 GHz, the channel 128, 190, and 251 were pre-tested in chamber. The channel 251 was chosen for final test.
2. Above 1 GHz, the channel 128, 190, and 251 were tested individually.
3. The worst case for final test is chosen when the power control level set 5.
4. The channel space is 0.2MHz.
5. The EUT is a GPRS class 10 device (Multislot class: 10, Mobile Terminal B), which provide 2 up-link. After pre-tested both functions, found up-link with 1 time slot is worse, therefore, test results of output power, frequency stability, occupied bandwidth and band edge tests came out from this.
6. The EUT is an E-GPRS class 10 device (Multislot class: 10, Mobile Terminal B), which provide 2 up-link. After pre-tested both functions, found up-link with 1 time slot is worse, therefore, test results of output power, frequency stability, occupied bandwidth and band edge tests came out from this.
7. The EUT has GPRS & E-GPRS functions. After pre-testing, GPRS function is the worst case for all the emission tests.

FOR CDMA:

788 channels are provided to this EUT in the CDMA850 band. Therefore, the low, middle and high channels are chosen for testing.

| | CHANNEL | FREQUENCY | TX MODE |
|--------|---------|------------|---------|
| LOW | 1013 | 824.70 MHz | SO55 |
| MIDDLE | 384 | 836.52 MHz | SO55 |
| HIGH | 777 | 848.31 MHz | SO55 |

NOTE:

1. Below 1 GHz, the channel 1013, 384 and 777 were pre-tested in chamber. The channel 777 was the worst case and chosen for final test.
2. Above 1 GHz, the channel 1013, 384 and 777 were tested individually.
3. The channel space is 0.03MHz.
4. In this report, CDMA2000 (SO55) was the worst case for all test items, therefore, only the data was recorded in the following section.

FOR WCDMA:


102 channels are provided to this EUT. Therefore, the low, middle and high channels are chosen for testing.

| | CHANNEL | FREQUENCY | TX MODE |
|--------|---------|-----------|---------|
| LOW | 4132 | 826.4 MHz | WCDMA |
| MIDDLE | 4182 | 836.4 MHz | WCDMA |
| HIGH | 4233 | 846.6 MHz | WCDMA |

NOTE:

1. Below 1 GHz, the channel 4132, 4182 and 4233 were pre-tested in chamber. The channel 4233 was chosen for final test.
2. Above 1 GHz, the channel 4132, 4182 and 4233 were tested individually.
3. The channel space is 0.2MHz.
4. WCDMA-RMC mode has been chosen for the worst case to do the final test and record.

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

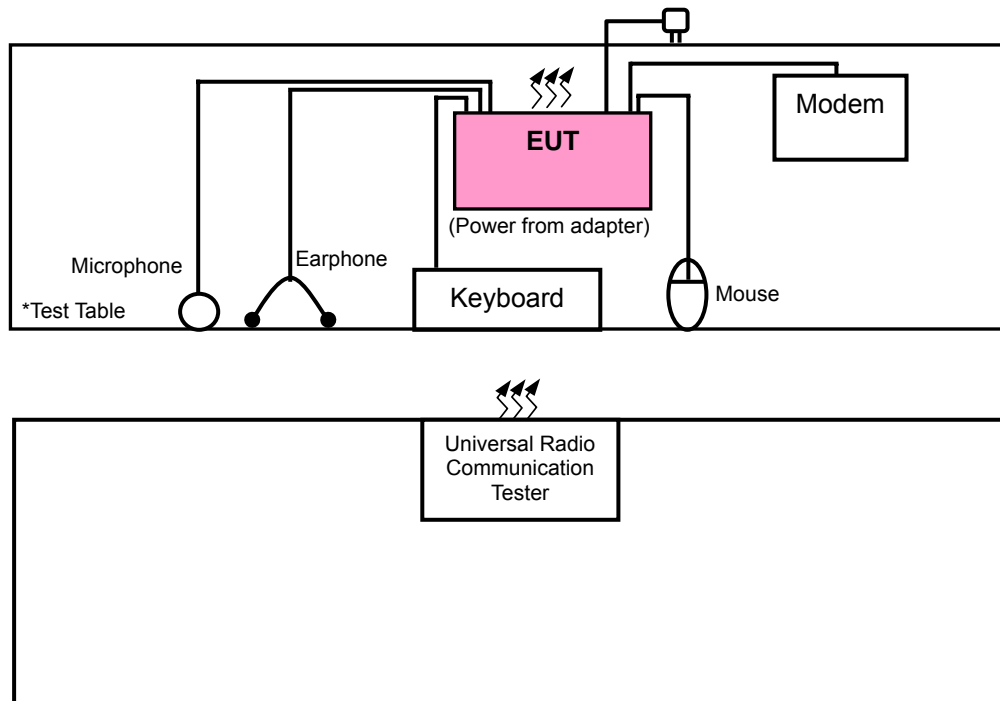

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL FOR GPRS & E-GPRS:

| EUT CONFIGURE MODE | APPLICABLE TO | | | | | | | DESCRIPTION |
|--------------------|---------------|----|----|----|----|-------|-------|-------------|
| | OP | FS | OB | BE | CE | RE<1G | RE≥1G | |
| - | √ | √ | √ | √ | √ | √ | √ | - |

Where **OP**: Output power **FS**: Frequency stability
OB: Occupied bandwidth **BE**: Band edge
CE: Conducted spurious emissions **RE<1G**: Radiated emission below 1GHz
RE≥1G: Radiated emission above 1GHz

OUTPUT POWER MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY |
|-------------------|----------------|-----------------------|
| 128 to 251 | 128, 190, 251 | GPRS, EGPRS |

FREQUENCY STABILITY MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY |
|-------------------|----------------|-----------------------|
| 128 to 251 | 190 | GPRS |

OCCUPIED BANDWIDTH MEASUREMENT:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY |
|-------------------|----------------|-----------------------|
| 128 to 251 | 128, 190, 251 | GPRS, EGPRS |

BAND EDGE MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY |
|-------------------|----------------|-----------------------|
| 128 to 251 | 128, 251 | GPRS, EGPRS |

CONDUCTED SPURIOUS EMISSIONS MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY |
|-------------------|----------------|-----------------------|
| 128 to 251 | 128, 190, 251 | GPRS |

RADIATED EMISSION MEASUREMENT (BELOW 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | AXIS |
|-------------------|----------------|-----------------------|------|
| 128 to 251 | 251 | GPRS | Y |

RADIATED EMISSION MEASUREMENT (ABOVE 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | AXIS |
|-------------------|----------------|-----------------------|------|
| 128 to 251 | 128, 190, 251 | GPRS | Y |

TEST CONDITION:

| APPLICABLE TO | ENVIRONMENTAL CONDITIONS | INPUT POWER | TESTED BY |
|---------------|---------------------------|--------------|-----------|
| OP | 23deg. C, 63%RH, 1008 hPa | 120Vac, 60Hz | Mark Liao |
| FS | 23deg. C, 63%RH, 1008 hPa | 120Vac, 60Hz | Mark Liao |
| OB | 23deg. C, 63%RH, 1008 hPa | 120Vac, 60Hz | Mark Liao |
| EM | 23deg. C, 63%RH, 1008 hPa | 120Vac, 60Hz | Mark Liao |
| BE | 23deg. C, 63%RH, 1008 hPa | 120Vac, 60Hz | Mark Liao |
| CE | 23deg. C, 63%RH, 1008 hPa | 120Vac, 60Hz | Mark Liao |
| RE < 1G | 23deg. C, 63%RH, 991 hPa | 120Vac, 60Hz | Mark Liao |
| RE ≥ 1G | 23deg. C, 63%RH, 991 hPa | 120Vac, 60Hz | Mark Liao |

FOR CDMA:

| EUT CONFIGURE MODE | APPLICABLE TO | | | | | | | DESCRIPTION |
|--------------------|---------------|----|----|----|----|-------|-------|-------------|
| | OP | FS | OB | BE | CE | RE<1G | RE≥1G | |
| - | √ | √ | √ | √ | √ | √ | √ | - |

Where **OP**: Output power
OB: Occupied bandwidth
CE: Conducted spurious emissions
RE≥1G: Radiated emission above 1GHz
FS: Frequency stability
BE: Band edge
RE<1G: Radiated emission below 1GHz

OUTPUT POWER MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY |
|-------------------|----------------|-----------------------|
| 1013 to 777 | 1013, 384, 777 | CDMA |

FREQUENCY STABILITY MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY |
|-------------------|----------------|-----------------------|
| 1013 to 777 | 384 | CDMA |

OCCUPIED BANDWIDTH MEASUREMENT:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY |
|-------------------|----------------|-----------------------|
| 1013 to 777 | 1013, 384, 777 | CDMA |

BAND EDGE MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY |
|-------------------|----------------|-----------------------|
| 1013 to 777 | 1013, 777 | CDMA |

CONDUCTED SPURIOUS EMISSIONS MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY |
|-------------------|----------------|-----------------------|
| 1013 to 777 | 1013, 384, 777 | CDMA |

RADIATED EMISSION MEASUREMENT (BELOW 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | AXIS |
|-------------------|----------------|-----------------------|------|
| 1013 to 777 | 777 | CDMA | Y |

RADIATED EMISSION MEASUREMENT (ABOVE 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | AXIS |
|-------------------|----------------|-----------------------|------|
| 1013 to 777 | 1013, 384, 777 | CDMA | Y |

TEST CONDITION:

| APPLICABLE TO | ENVIRONMENTAL CONDITIONS | INPUT POWER (SYSTEM) | TESTED BY |
|---------------|---------------------------|----------------------|-----------|
| OP | 23deg. C, 63%RH, 1008 hPa | 120Vac, 60Hz | Mark Liao |
| FS | 23deg. C, 63%RH, 1008 hPa | 120Vac, 60Hz | Mark Liao |
| OB | 23deg. C, 63%RH, 1008 hPa | 120Vac, 60Hz | Mark Liao |
| EM | 23deg. C, 63%RH, 1008 hPa | 120Vac, 60Hz | Mark Liao |
| BE | 23deg. C, 63%RH, 1008 hPa | 120Vac, 60Hz | Mark Liao |
| CE | 23deg. C, 63%RH, 1008 hPa | 120Vac, 60Hz | Mark Liao |
| RE < 1G | 23deg. C, 63%RH, 991 hPa | 120Vac, 60Hz | Mark Liao |
| RE ≥ 1G | 23deg. C, 63%RH, 991 hPa | 120Vac, 60Hz | Mark Liao |

FOR WCDMA:

| EUT CONFIGURE MODE | APPLICABLE TO | | | | | | | DESCRIPTION |
|--------------------|---------------|----|----|----|----|-------|-------|-------------|
| | OP | FS | OB | BE | CE | RE<1G | RE≥1G | |
| - | √ | √ | √ | √ | √ | √ | √ | - |

Where **OP**: Output power **FS**: Frequency stability
OB: Occupied bandwidth **BE**: Band edge
CE: Conducted spurious emissions **RE<1G**: Radiated emission below 1GHz
RE≥1G: Radiated emission above 1GHz

OUTPUT POWER MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY |
|-------------------|------------------|-----------------------|
| 4132 to 4233 | 4132, 4182, 4233 | WCDMA |

FREQUENCY STABILITY MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY |
|-------------------|----------------|-----------------------|
| 4132 to 4233 | 4182 | WCDMA |

OCCUPIED BANDWIDTH MEASUREMENT:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY |
|-------------------|------------------|-----------------------|
| 4132 to 4233 | 4132, 4182, 4233 | WCDMA |

BAND EDGE MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY |
|-------------------|----------------|-----------------------|
| 4132 to 4233 | 4132, 4233 | WCDMA |

CONDUCTED SPURIOUS EMISSIONS MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY |
|-------------------|------------------|-----------------------|
| 4132 to 4233 | 4132, 4182, 4233 | WCDMA |

RADIATED EMISSION MEASUREMENT (BELOW 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | AXIS |
|-------------------|----------------|-----------------------|------|
| 4132 to 4233 | 4233 | WCDMA | Y |

RADIATED EMISSION MEASUREMENT (ABOVE 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | AXIS |
|-------------------|------------------|-----------------------|------|
| 4132 to 4233 | 4132, 4182, 4233 | WCDMA | Y |

TEST CONDITION:

| APPLICABLE TO | ENVIRONMENTAL CONDITIONS | INPUT POWER (SYSTEM) | TESTED BY |
|---------------|---------------------------|----------------------|-----------|
| OP | 23deg. C, 63%RH, 1008 hPa | 120Vac, 60Hz | Mark Liao |
| FS | 23deg. C, 63%RH, 1008 hPa | 120Vac, 60Hz | Mark Liao |
| OB | 23deg. C, 63%RH, 1008 hPa | 120Vac, 60Hz | Mark Liao |
| EM | 23deg. C, 63%RH, 1008 hPa | 120Vac, 60Hz | Mark Liao |
| BE | 23deg. C, 63%RH, 1008 hPa | 120Vac, 60Hz | Mark Liao |
| CE | 23deg. C, 63%RH, 1008 hPa | 120Vac, 60Hz | Mark Liao |
| RE < 1G | 23deg. C, 74%RH, 1008 hPa | 120Vac, 60Hz | Mark Liao |
| RE ≥ 1G | 23deg. C, 63%RH, 1008 hPa | 120Vac, 60Hz | Mark Liao |

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 22

ANSI C63.4-2003

ANSI/TIA/EIA-603-C 2004

NOTE: All test items have been performed and recorded as per the above standards.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| NO. | PRODUCT | BRAND | MODEL NO. | SERIAL NO. | FCC ID |
|-----|--------------------------------------|---------|-----------|------------------------------|------------------|
| 1 | MOUSE | DELL | MO56U0 | 513001542 | FCC DoC Approved |
| 2 | USB KEYBOARD | DELL | SK-8115 | MY-0DJ325-716 19-857-0405 | NA |
| 3 | MODEM | ACEEX | 1414V/3 | 0401008270 | IFAXDM1414 |
| 4 | EARPHONE | PHILIPS | HL145 | N/A | NA |
| 5 | MICROPHONE | Labtec | LVA7313 | N/A | NA |
| 6 | UNIVERSAL RADIO COMMUNICATION TESTER | R&S | CMU200 | 104484 | NA |
| 7 | NJZ-2000 (GPRS+WCDMA SIMULATOR) | JRC | NJZ-2000 | ET00054 | NA |

| NO. | SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS |
|-----|--|
| 1 | 1.8m foil shielded wire, USB Connector, w/o core. |
| 2 | 1.8m foil shielded wire, USB Connector, w/o core. |
| 3 | 1.2m braid shielded wire, DB25 & DB9 connector, w/o core. |
| 4 | 1.2m shielded cable |
| 5 | 1m wrapped shielded wire, terminated via drain wire, with 3.5 mm phone plug, w/o core. |
| 6 | NA |
| 7 | NA |

NOTE 1: All power cords of the above support units are non shielded (1.8m).

NOTE 2: Item 6-7 acted as a communication partners to transfer data.

4 TEST TYPES AND RESULTS

4.1 OUTPUT POWER MEASUREMENT

4.1.1 LIMITS OF OUTPUT POWER MEASUREMENT

The radiated output power shall be according to the specific rule Part 22.913 (a) that “Mobile / Portable station are limited to 7 watts e.r.p”.

4.1.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | DATE OF CALIBRATION | DUE DATE OF CALIBRATION |
|---|------------------------------|-------------|---------------------|-------------------------|
| Test Receiver ROHDE & SCHWARZ | ESIB7 | 100188 | Dec. 21, 2009 | Dec. 20, 2010 |
| Spectrum Analyzer ROHDE & SCHWARZ | FSP40 | 100269 | Dec. 31, 2009 | Dec. 30, 2010 |
| BILOG Antenna SCHWARZBECK | VULB9168 | 9168-160 | Apr. 27, 2010 | Apr. 26, 2011 |
| HORN Antenna SCHWARZBECK | 9120D | 9120D-405 | Feb. 03, 2010 | Feb. 02, 2011 |
| HORN Antenna SCHWARZBECK | BBHA 9170 | BBHA9170243 | Dec. 25, 2009 | Dec. 24, 2010 |
| Preamplifier Agilent | 8447D | 2944A10638 | Dec. 21, 2009 | Dec. 20, 2010 |
| Preamplifier Agilent | 8449B | 3008A01964 | Nov. 09, 2009 | Nov. 08, 2010 |
| RF signal cable HUBER+SUHNNER | SUCOFLEX 104 | 238141/4 | May 14, 2010 | May 13, 2011 |
| RF signal cable HUBER+SUHNNER | SUCOFLEX 104 | 12738/6 | May 14, 2010 | May 13, 2011 |
| Software ADT. | ADT_Radiated_ V7.6.15.9.2 | NA | NA | NA |
| Antenna Tower inn-co GmbH | MA 4000 | 013303 | NA | NA |
| Antenna Tower Controller inn-co GmbH | CO2000 | 017303 | NA | NA |
| Turn Table ADT. | TT100. | TT93021703 | NA | NA |
| Turn Table Controller ADT. | SC100. | SC93021703 | NA | NA |


- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 3.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The FCC Site Registration No. is 988962.
 5. The IC Site Registration No. is IC 7450F-3.

4.1.3 TEST PROCEDURES

- a. The power was measured with R&S Spectrum Analyzer. All measurements were done at 3 channels, 128, 190 and 251 (GPRS & E-GPRS) / 1013, 384 and 777 (CDMA) / 4132, 4182 and 4233 (WCDMA) (low, middle and high operational frequency range.)
- b. The conducted output power used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer. The path loss included the splitter loss, cable loss and 20dB pad loss. The spectrum set RB/VB 1MHz (GPRS & E-GPRS), 3MHz (CDMA) and 5MHz (WCDMA), then read peak power value and record to the test. (All transmitted path loss shall be considered in the test report data.)
- c. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- d. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a tx cable . Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to “Read Value “ of step c. Record the power level of S.G
- e. $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn.}$
- f. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole,
 $E.R.P \text{ power} = E.I.P.R \text{ power} - 2.15\text{dBi.}$


4.1.4 TEST SETUP

EIRP POWER MEASUREMENT:

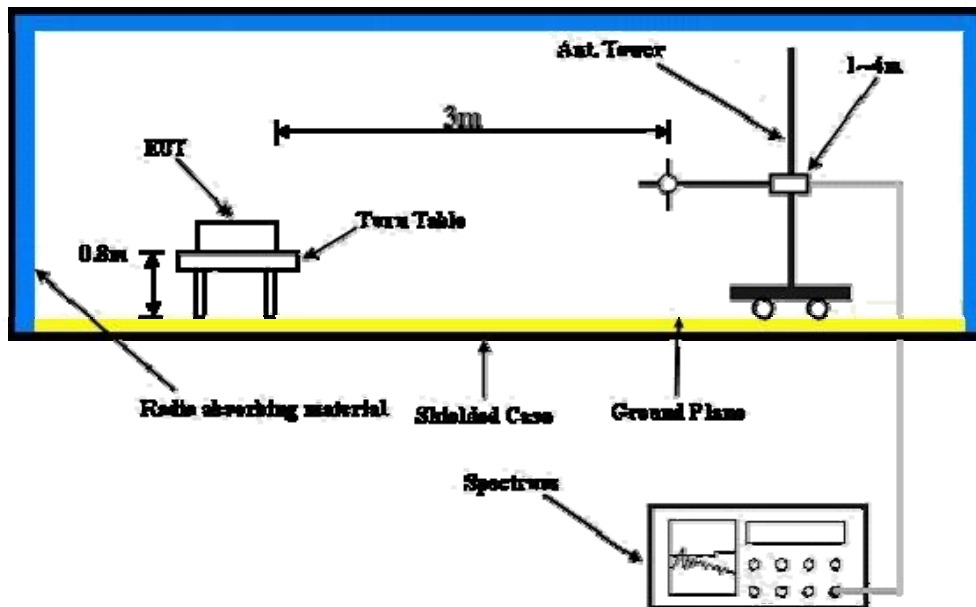

For the actual test configuration, please refer to the attached file (Test Setup Photo).

CONDUCTED POWER MEASUREMENT:

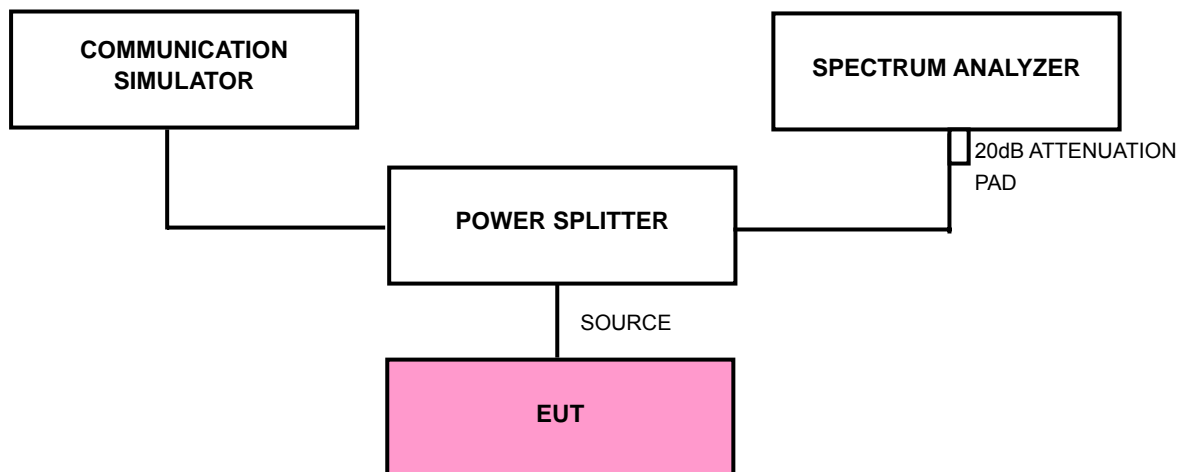

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.5 EUT OPERATING CONDITIONS

- The EUT makes a call to the communication simulator.
- The communication simulator station system controlled an EUT to export maximum output power under transmission mode and specific channel frequency.

4.1.6 TEST RESULTS

FOR GPRS & E-GPRS:

FOR GPRS MODE (UP-LINK WITH 1 TIME SLOT)

| CONDUCTED OUTPUT POWER | | | | | |
|------------------------|-----------------|-----------------|------------------------|--------------|--------|
| CHANNEL NO. | FREQUENCY (MHz) | RAW VALUE (dBm) | CORRECTION FACTOR (dB) | OUTPUT POWER | |
| | | | | dBm | Watt |
| 128 | 824.2 | 8.20 | 23.90 | 32.10 | 1.6218 |
| 190 | 836.6 | 8.20 | 23.90 | 32.10 | 1.6218 |
| 251 | 848.8 | 8.20 | 23.90 | 32.10 | 1.6218 |

FOR E-GPRS MODE (UP-LINK WITH 1 TIME SLOT)

| CONDUCTED OUTPUT POWER | | | | | |
|------------------------|-----------------|-----------------|------------------------|--------------|--------|
| CHANNEL NO. | FREQUENCY (MHz) | RAW VALUE (dBm) | CORRECTION FACTOR (dB) | OUTPUT POWER | |
| | | | | dBm | Watt |
| 128 | 824.2 | 3.70 | 23.90 | 27.60 | 0.5754 |
| 190 | 836.6 | 3.80 | 23.90 | 27.70 | 0.5888 |
| 251 | 848.8 | 3.70 | 23.90 | 27.60 | 0.5754 |

- REMARKS:** 1. Output Power (dBm) = Raw Value (dBm) + Correction Factor (dB).
 2. Correction Factor (dB) = Power Splitter Loss (dB) + Cable Loss (dB) + 20dB Pad.

FOR GPRS MODE (UP-LINK WITH 1 TIME SLOT)

| ERP POWER | | | | | |
|-------------|-----------------|-----------------|------------------------|--------------|--------|
| CHANNEL NO. | FREQUENCY (MHz) | S.G VALUE (dBm) | CORRECTION FACTOR (dB) | OUTPUT POWER | |
| | | | | dBm | Watt |
| 128 | 824.2 | 32.1 | -8.6 | 23.5 | 0.2213 |
| 190 | 836.6 | 32.1 | -8.6 | 23.5 | 0.2213 |
| 251 | 848.8 | 32.1 | -8.7 | 23.4 | 0.2163 |

FOR E-GPRS MODE (UP-LINK WITH 1 TIME SLOT)

| ERP POWER | | | | | |
|-------------|-----------------|-----------------|------------------------|--------------|--------|
| CHANNEL NO. | FREQUENCY (MHz) | S.G VALUE (dBm) | CORRECTION FACTOR (dB) | OUTPUT POWER | |
| | | | | dBm | Watt |
| 128 | 824.2 | 27.1 | -8.6 | 18.5 | 0.0700 |
| 190 | 836.6 | 27.5 | -8.6 | 18.9 | 0.0767 |
| 251 | 848.8 | 27.3 | -8.7 | 18.6 | 0.0716 |

- REMARKS:** 1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
 2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).



FOR CDMA:

| WORST CASE CONDUCTED POWER OF 1x EV-DO | | | | | | | | |
|--|-------------|-----------------|--------|-------------------|--------------|--------|--------|--------|
| CHANNEL | FREQ. (MHz) | Rev. A | Rev. 0 | CORR. FACTOR (dB) | Rev. A | | Rev. 0 | |
| | | | | | OUTPUT POWER | | | |
| | | RAW VALUE (dBm) | | | dBm | Watt | dBm | Watt |
| 1013 | 824.70 | -0.9 | -0.7 | 23.90 | 23.02 | 0.2004 | 23.21 | 0.2094 |
| 384 | 836.52 | -0.5 | -0.5 | 23.90 | 23.38 | 0.2178 | 23.44 | 0.2208 |
| 777 | 848.31 | -0.7 | -0.6 | 23.90 | 23.24 | 0.2109 | 23.32 | 0.2148 |

| CDMA 2000 CONDUCTED POWER | | | | | | | | | | | |
|---------------------------|-------------|-----------|-----------------|-------|-------|-----------------|-------------------|----------------------|-------|-------|-----------------|
| CHAN. | FREQ. (MHz) | CDMA 2000 | RAW VALUE (dBm) | | | | CORR. FACTOR (dB) | OUTPUT POWER (dBm) | | | |
| | | | RC | SO2 | SO55 | TDSO SO32 (FCH) | | TDSO SO32 (FCH+S CH) | SO2 | SO55 | TDSO SO32 (FCH) |
| | | 1013 | 824.70 | RC1 | -0.91 | -0.82 | | - | - | 23.90 | 22.99 |
| RC3 | -0.75 | | | -0.65 | -0.67 | -0.69 | 23.90 | 23.15 | 23.25 | 23.23 | 23.21 |
| 384 | 836.52 | RC1 | -0.46 | -0.35 | - | - | 23.90 | 23.44 | 23.55 | - | - |
| | | RC3 | -0.40 | -0.32 | -0.39 | -0.41 | 23.90 | 23.50 | 23.58 | 23.51 | 23.49 |
| 777 | 848.31 | RC1 | -0.80 | -0.76 | - | - | 23.90 | 23.10 | 23.14 | - | - |
| | | RC3 | -0.78 | -0.62 | -0.68 | -0.64 | 23.90 | 23.12 | 23.28 | 23.22 | 23.26 |

REMARKS: 1. Output Power (dBm) = Raw Value (dBm) + Correction Factor (dB).
 2. Correction Factor (dB) = Power Splitter Loss (dB) + Cable Loss (dB)+ 20dB Pad.

1xEV-DO MODE

| ERP POWER (1x EV-DO) | | | | | | | | |
|----------------------|-------------|------------------|--------|-------------------|--------------|--------|--------|--------|
| CHANNEL | FREQ. (MHz) | S.G. VALUE (dBm) | | CORR. FACTOR (dB) | OUTPUT POWER | | | |
| | | | | | Rev. A | | Rev. 0 | |
| | | Rev. A | Rev. 0 | | dBm | Watt | dBm | Watt |
| 1013 | 824.70 | 24.0 | 24.5 | -8.6 | 15.4 | 0.0343 | 15.9 | 0.0385 |
| 384 | 836.52 | 24.2 | 24.9 | -8.6 | 15.6 | 0.0359 | 16.3 | 0.0422 |
| 777 | 848.31 | 23.1 | 23.9 | -8.7 | 14.4 | 0.0272 | 15.2 | 0.0327 |

CDMA MODE

| ERP POWER (SO55) | | | | | |
|------------------|-----------------|------------------|------------------------|--------------|--------|
| CHANNEL NO. | FREQUENCY (MHz) | S.G. VALUE (dBm) | CORRECTION FACTOR (dB) | OUTPUT POWER | |
| | | | | dBm | Watt |
| 1013 | 824.70 | 25.1 | -8.6 | 16.5 | 0.0442 |
| 384 | 836.52 | 25.3 | -8.6 | 16.7 | 0.0462 |
| 777 | 848.31 | 24.4 | -8.7 | 15.7 | 0.0367 |

REMARKS: 1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

FOR WCDMA:
WCDMA-RMC MODE

| CONDUCTED OUTPUT POWER | | | | | |
|------------------------|-----------------|-----------------|------------------------|--------------|--------|
| CHANNEL NO. | FREQUENCY (MHz) | RAW VALUE (dBm) | CORRECTION FACTOR (dB) | OUTPUT POWER | |
| | | | | dBm | Watt |
| 4132 | 826.4 | 0.44 | 23.90 | 24.34 | 0.2716 |
| 4182 | 836.4 | 0.49 | 23.90 | 24.39 | 0.2748 |
| 4233 | 846.6 | 0.26 | 23.90 | 24.16 | 0.2606 |

HSDPA MODE-R5 Subtest 1

| CONDUCTED OUTPUT POWER | | | | | |
|------------------------|-----------------|-----------------|------------------------|--------------|--------|
| CHANNEL NO. | FREQUENCY (MHz) | RAW VALUE (dBm) | CORRECTION FACTOR (dB) | OUTPUT POWER | |
| | | | | dBm | Watt |
| 4132 | 826.4 | 0.07 | 23.90 | 23.97 | 0.2495 |
| 4182 | 836.4 | 0.14 | 23.90 | 24.04 | 0.2535 |
| 4233 | 846.6 | -0.03 | 23.90 | 23.87 | 0.2438 |

HSDPA MODE-R5 Subtest 2

| CONDUCTED OUTPUT POWER | | | | | |
|------------------------|-----------------|-----------------|------------------------|--------------|--------|
| CHANNEL NO. | FREQUENCY (MHz) | RAW VALUE (dBm) | CORRECTION FACTOR (dB) | OUTPUT POWER | |
| | | | | dBm | Watt |
| 4132 | 826.4 | -0.64 | 23.90 | 23.26 | 0.2118 |
| 4182 | 836.4 | -0.15 | 23.90 | 23.75 | 0.2371 |
| 4233 | 846.6 | -0.85 | 23.90 | 23.05 | 0.2018 |

HSDPA MODE-R5 Subtest 3

| CONDUCTED OUTPUT POWER | | | | | |
|------------------------|-----------------|-----------------|------------------------|--------------|--------|
| CHANNEL NO. | FREQUENCY (MHz) | RAW VALUE (dBm) | CORRECTION FACTOR (dB) | OUTPUT POWER | |
| | | | | dBm | Watt |
| 4132 | 826.4 | -0.14 | 23.90 | 23.76 | 0.2377 |
| 4182 | 836.4 | -0.56 | 23.90 | 23.34 | 0.2158 |
| 4233 | 846.6 | -0.10 | 23.90 | 23.80 | 0.2399 |

REMARKS: 1. Output Power (dBm) = Raw Value (dBm) + Correction Factor (dB).

2. Correction Factor (dB) = Power Splitter Loss (dB) + Cable Loss (dB)+ 20dB Pad.

HSDPA MODE-R5 Subtest 4

| CONDUCTED OUTPUT POWER | | | | | |
|------------------------|-----------------|-----------------|------------------------|--------------|--------|
| CHANNEL NO. | FREQUENCY (MHz) | RAW VALUE (dBm) | CORRECTION FACTOR (dB) | OUTPUT POWER | |
| | | | | dBm | Watt |
| 4132 | 826.4 | -0.19 | 23.90 | 23.71 | 0.2350 |
| 4182 | 836.4 | -0.35 | 23.90 | 23.55 | 0.2265 |
| 4233 | 846.6 | -0.39 | 23.90 | 23.51 | 0.2244 |

HSUPA MODE-R6 Subtest 1

| CONDUCTED OUTPUT POWER | | | | | |
|------------------------|-----------------|-----------------|------------------------|--------------|--------|
| CHANNEL NO. | FREQUENCY (MHz) | RAW VALUE (dBm) | CORRECTION FACTOR (dB) | OUTPUT POWER | |
| | | | | dBm | Watt |
| 4132 | 826.4 | -0.88 | 23.90 | 23.02 | 0.2004 |
| 4182 | 836.4 | -0.42 | 23.90 | 23.48 | 0.2228 |
| 4233 | 846.6 | 0.25 | 23.90 | 24.15 | 0.2600 |

HSUPA MODE-R6 Subtest 2

| CONDUCTED OUTPUT POWER | | | | | |
|------------------------|-----------------|-----------------|------------------------|--------------|--------|
| CHANNEL NO. | FREQUENCY (MHz) | RAW VALUE (dBm) | CORRECTION FACTOR (dB) | OUTPUT POWER | |
| | | | | dBm | Watt |
| 4132 | 826.4 | -1.30 | 23.90 | 22.60 | 0.1820 |
| 4182 | 836.4 | -1.00 | 23.90 | 22.90 | 0.1950 |
| 4233 | 846.6 | -1.15 | 23.90 | 22.75 | 0.1884 |

HSUPA MODE-R6 Subtest 3

| CONDUCTED OUTPUT POWER | | | | | |
|------------------------|-----------------|-----------------|------------------------|--------------|--------|
| CHANNEL NO. | FREQUENCY (MHz) | RAW VALUE (dBm) | CORRECTION FACTOR (dB) | OUTPUT POWER | |
| | | | | dBm | Watt |
| 4132 | 826.4 | -1.58 | 23.90 | 22.32 | 0.1706 |
| 4182 | 836.4 | -1.05 | 23.90 | 22.85 | 0.1928 |
| 4233 | 846.6 | -0.58 | 23.90 | 23.32 | 0.2148 |

REMARKS: 1. Output Power (dBm) = Raw Value (dBm) + Correction Factor (dB).

2. Correction Factor (dB) = Power Splitter Loss (dB) + Cable Loss (dB)+ 20dB Pad.



HSUPA MODE-R6 Subtest 4

| CONDUCTED OUTPUT POWER | | | | | |
|------------------------|-----------------|-----------------|------------------------|--------------|--------|
| CHANNEL NO. | FREQUENCY (MHz) | RAW VALUE (dBm) | CORRECTION FACTOR (dB) | OUTPUT POWER | |
| | | | | dBm | Watt |
| 4132 | 826.4 | 0.08 | 23.90 | 23.98 | 0.2500 |
| 4182 | 836.4 | -0.10 | 23.90 | 23.80 | 0.2399 |
| 4233 | 846.6 | -0.79 | 23.90 | 23.11 | 0.2046 |

HSUPA MODE-R6 Subtest 5

| CONDUCTED OUTPUT POWER | | | | | |
|------------------------|-----------------|-----------------|------------------------|--------------|--------|
| CHANNEL NO. | FREQUENCY (MHz) | RAW VALUE (dBm) | CORRECTION FACTOR (dB) | OUTPUT POWER | |
| | | | | dBm | Watt |
| 4132 | 826.4 | -0.52 | 23.90 | 23.38 | 0.2178 |
| 4182 | 836.4 | -0.58 | 23.90 | 23.32 | 0.2148 |
| 4233 | 846.6 | -0.66 | 23.90 | 23.24 | 0.2109 |

- REMARKS:** 1. Output Power (dBm) = Raw Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Power Splitter Loss (dB) + Cable Loss (dB)+ 20dB Pad.

WCDMA-RMC MODE

| ERP POWER | | | | | |
|-------------|-----------------|-----------------|------------------------|--------------|--------|
| CHANNEL NO. | FREQUENCY (MHz) | S.G VALUE (dBm) | CORRECTION FACTOR (dB) | OUTPUT POWER | |
| | | | | dBm | Watt |
| 4132 | 826.4 | 23.9 | -8.6 | 15.3 | 0.0335 |
| 4182 | 836.4 | 23.7 | -8.6 | 15.1 | 0.0320 |
| 4233 | 846.6 | 23.3 | -8.7 | 14.7 | 0.0292 |

REMARKS: 1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
 2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

4.2 FREQUENCY STABILITY MEASUREMENT

4.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT

According to the FCC part 22.863 shall be tested the frequency stability. The rule is defined that "The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block." The frequency error rate is according to the JTC standard that the frequency error rate shall be accurate to within 2.5ppm of the received frequency from the base station. The test extreme voltage is according to the 2.1055(d)(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment and the extreme temperature rule is comply with the 2.1055(a)(1) $-30^{\circ}\text{C} \sim 50^{\circ}\text{C}$.

4.2.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED UNTIL | CALIBRATED UNTIL |
|---|-----------------|------------|------------------|------------------|
| Spectrum Analyzer Agilent | E4446A | MY44360124 | Feb. 05, 2010 | Feb. 04, 2011 |
| Hewlett Packard RF cable | 8120-6192 | 01428251 | NA | NA |
| RF cable | SUCOFLEX 104 | 257029 | Sep. 11, 2010 | Sep. 10, 2011 |
| WIT Standard Temperature & Humidity Chamber | MHU-225AU | 920409 | May 06, 2010 | May 05, 2011 |


NOTE: The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

4.2.3 TEST PROCEDURE

- a. Because of the measure the carrier frequency under the condition of the AFC lock, it shall be used the mobile station in the GPRS / CDMA / WCDMA link mode. This is accomplished with the use of the R&S CMU200 / JRC NJZ-2000 simulator station. The oven room could control the temperatures and humidity. The GPRS link channel is the 190, the CDMA link channel is the 384 and the WCDMA link channel is the 4182.
- b. Power must be removed when changing from one temperature to another or one voltage to another voltage. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- c. EUT is connected the external power supply to control the AC input power. The various Volts from the minimum 93.5 Volts to 126.5 Volts. Each step shall be record the frequency error rate.
- d. The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^{\circ}\text{C}$ during the measurement testing.
- e. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the communication simulator.

4.2.4 TEST SETUP

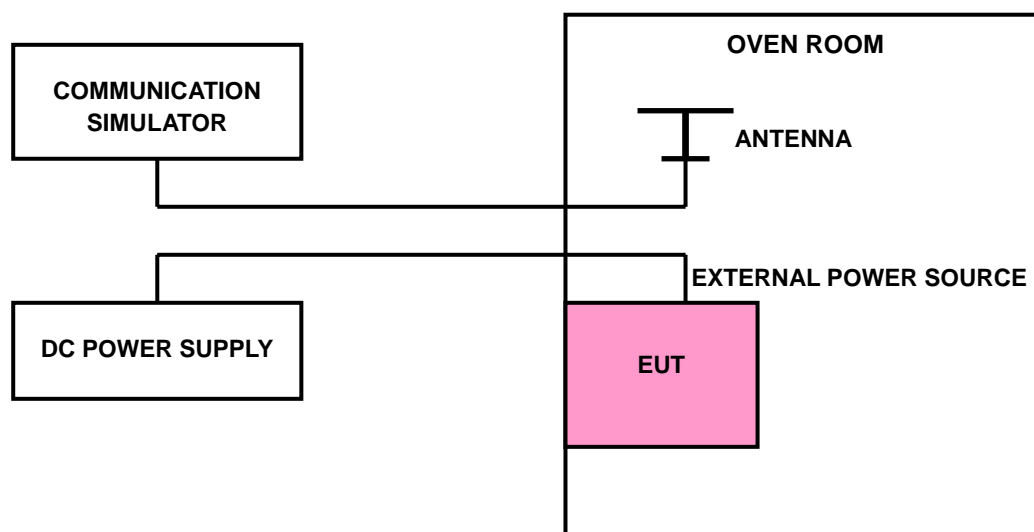

4.2.5 TEST RESULTS

FOR GPRS:

| AFC FREQUENCY ERROR vs. VOLTAGE | | | |
|---------------------------------|----------------------|-----------------------|-------------|
| VOLTAGE (Volts) | FREQUENCY ERROR (Hz) | FREQUENCY ERROR (ppm) | LIMIT (ppm) |
| 126.5 | -37 | -0.044 | 2.5 |
| 93.5 | -31 | -0.037 | 2.5 |

NOTE: The applicant defined the normal working voltage of the AC adapter is from 93.5Vac to 126.5Vac.

| AFC FREQUENCY ERROR vs. TEMP. | | | |
|-------------------------------|----------------------|-----------------------|-------------|
| TEMP. (°C) | FREQUENCY ERROR (Hz) | FREQUENCY ERROR (ppm) | LIMIT (ppm) |
| 50 | -46 | -0.055 | 2.5 |
| 40 | -40 | -0.048 | 2.5 |
| 30 | -24 | -0.029 | 2.5 |
| 20 | -42 | -0.050 | 2.5 |
| 10 | -23 | -0.027 | 2.5 |
| 0 | -22 | -0.026 | 2.5 |
| -10 | -11 | -0.013 | 2.5 |
| -20 | -3 | -0.004 | 2.5 |
| -30 | -8 | -0.010 | 2.5 |

FOR CDMA:

| AFC FREQUENCY ERROR vs. VOLTAGE | | | |
|---------------------------------|----------------------|-----------------------|-------------|
| VOLTAGE (Volts) | FREQUENCY ERROR (Hz) | FREQUENCY ERROR (ppm) | LIMIT (ppm) |
| 126.5 | -35 | -0.042 | 2.5 |
| 93.5 | -33 | -0.039 | 2.5 |

NOTE: The applicant defined the normal working voltage of the AC adapter is from 93.5Vac to 126.5Vac.

| AFC FREQUENCY ERROR vs. TEMP. | | | |
|-------------------------------|----------------------|-----------------------|-------------|
| TEMP. (°C) | FREQUENCY ERROR (Hz) | FREQUENCY ERROR (ppm) | LIMIT (ppm) |
| 50 | -41 | -0.049 | 2.5 |
| 40 | -38 | -0.045 | 2.5 |
| 30 | -20 | -0.024 | 2.5 |
| 20 | -37 | -0.044 | 2.5 |
| 10 | -18 | -0.022 | 2.5 |
| 0 | -20 | -0.024 | 2.5 |
| -10 | -8 | -0.010 | 2.5 |
| -20 | -5 | -0.006 | 2.5 |
| -30 | -5 | -0.006 | 2.5 |

FOR WCDMA:

| AFC FREQUENCY ERROR vs. VOLTAGE | | | |
|---------------------------------|----------------------|-----------------------|-------------|
| VOLTAGE (Volts) | FREQUENCY ERROR (Hz) | FREQUENCY ERROR (ppm) | LIMIT (ppm) |
| 126.5 | -38 | -0.045 | 2.5 |
| 93.5 | -33 | -0.039 | 2.5 |

NOTE: The applicant defined the normal working voltage of the AC adapter is from 93.5Vac to 126.5Vac.

| AFC FREQUENCY ERROR vs. TEMP. | | | |
|-------------------------------|----------------------|-----------------------|-------------|
| TEMP. (°C) | FREQUENCY ERROR (Hz) | FREQUENCY ERROR (ppm) | LIMIT (ppm) |
| 50 | -43 | -0.051 | 2.5 |
| 40 | -41 | -0.049 | 2.5 |
| 30 | -23 | -0.027 | 2.5 |
| 20 | -43 | -0.051 | 2.5 |
| 10 | -47 | -0.056 | 2.5 |
| 0 | -25 | -0.030 | 2.5 |
| -10 | -12 | -0.014 | 2.5 |
| -20 | -8 | -0.010 | 2.5 |
| -30 | -5 | -0.006 | 2.5 |

4.3 OCCUPIED BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF OCCUPIED BANDWIDTH MEASUREMENT


The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 %of the totalmean power of a given emission.

4.3.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | DATE OF CALIBRATION | DUE DATE OF CALIBRATION |
|--------------------------------------|--------------|------------|---------------------|-------------------------|
| ROHDE & SCHWARZ Spectrum Analyzer | FSP40 | 100040 | Jul. 09, 2010 | Jul. 08, 2011 |
| Mini-Circuits Power Splitter | ZN2PD-9G | NA | Jun. 25, 2010 | Jun. 24, 2011 |
| RF cable | SUCOFLEX 104 | 274403/4 | Aug. 20, 2010 | Aug. 19, 2011 |
| RF cable | SUCOFLEX 104 | 250729/4 | Aug. 19, 2010 | Aug. 18, 2011 |
| RF cable | SUCOFLEX 104 | 214377/4 | Aug. 19, 2010 | Aug. 18, 2011 |
| JFW 20dB attenuation | 50HF-020-SMA | NA | NA | NA |

NOTE: The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST SETUP

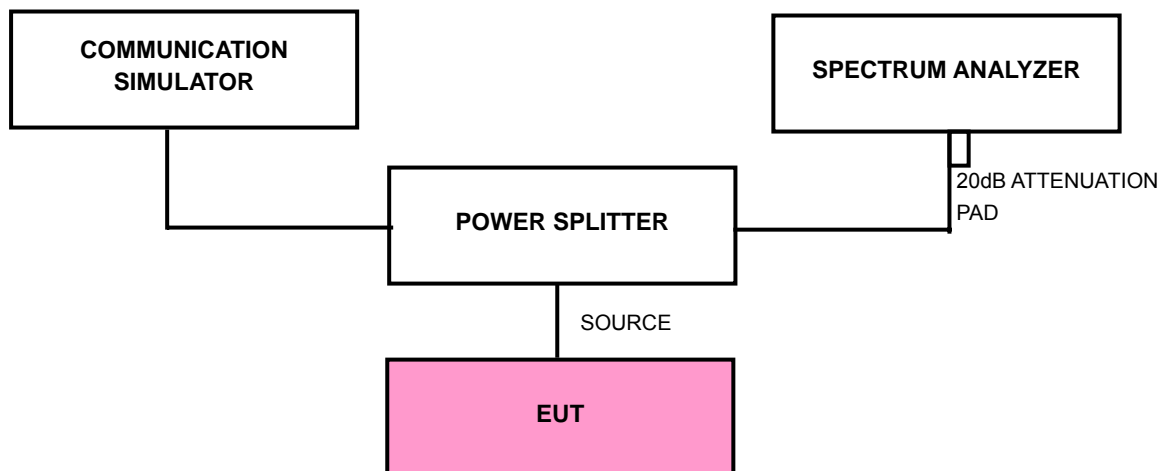

4.3.4 TEST PROCEDURES

- a. The EUT makes a call to the communication simulator. The power was measured with R&S Spectrum Analyzer. All measurements were done at 3 channels, 128, 190 and 251 (GPRS / E-GPRS) / 1013, 384 and 777 (CDMA) / 4132, 4182 and 4233 (WCDMA) (low, middle and high operational frequency range.)
- b. The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer. This splitter loss and cable loss is the worst loss 23.9dB in the transmitted path track.
- c. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.

4.3.5 EUT OPERATING CONDITION

- a. The EUT makes a call to the communication simulator.
- b. The communication simulator station system controlled a EUT to export maximum and minimum output power under transmission mode and specific channel frequency.


4.3.6 TEST RESULTS

FOR GPRS & E-GPRS:

FOR GPRS MODE (UP-LINK WITH 1 TIME SLOT)

| CHANNEL | FREQUENCY (MHz) | 99% OCCUPIED BANDWIDTH (kHz) |
|---------|-----------------|------------------------------|
| 128 | 824.2 | 244 |
| 190 | 836.6 | 244 |
| 251 | 848.8 | 248 |


CH 251

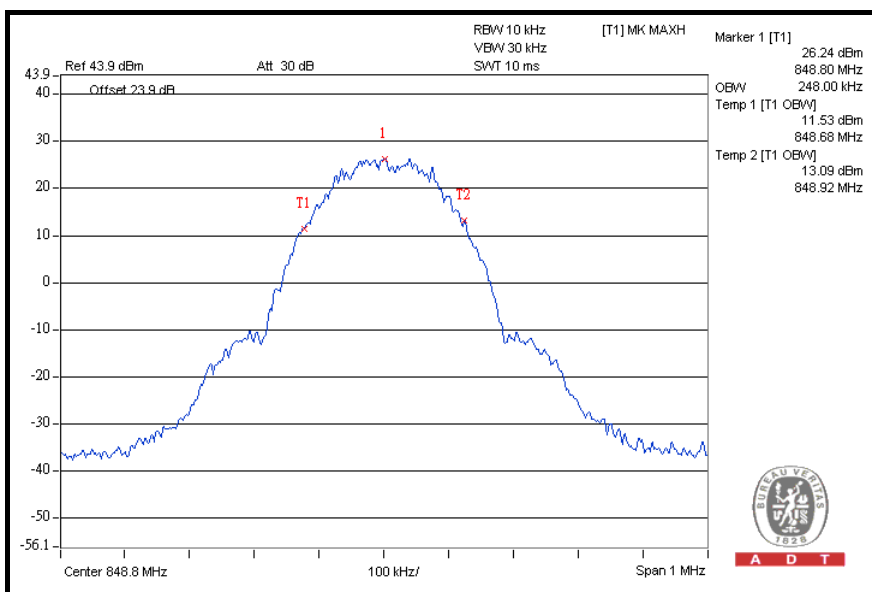

FOR E-GPRS MODE (UP-LINK WITH 1 TIME SLOT)

| CHANNEL | FREQUENCY (MHz) | 99% OCCUPIED BANDWIDTH (kHz) |
|---------|-----------------|------------------------------|
| 128 | 824.2 | 246 |
| 190 | 836.6 | 242 |
| 251 | 848.8 | 252 |

CH 251

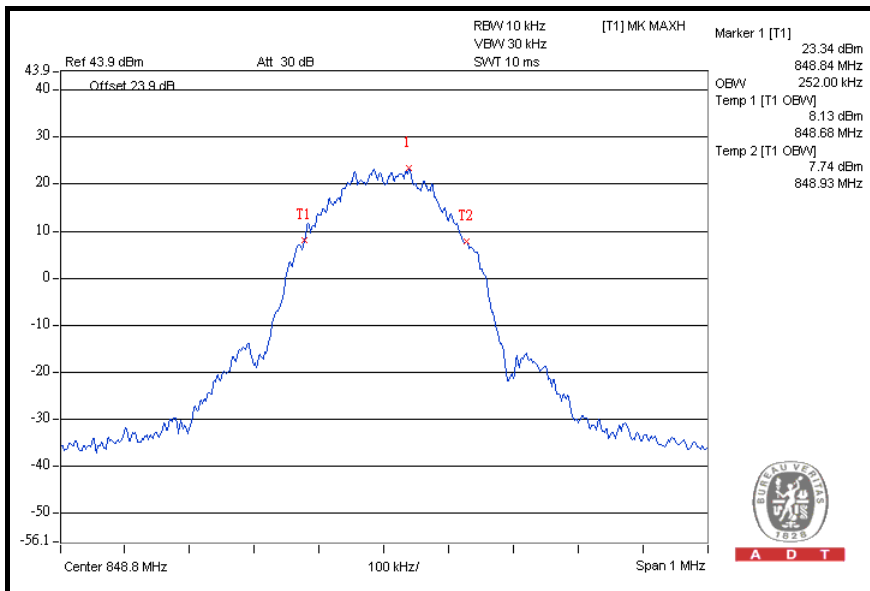


FOR CDMA

FOR SO55:

| CHANNEL | FREQUENCY (MHz) | 99% OCCUPIED BANDWIDTH (MHz) |
|---------|-----------------|------------------------------|
| 1013 | 824.70 | 1.28 |
| 384 | 836.52 | 1.27 |
| 777 | 848.31 | 1.28 |

CH 777

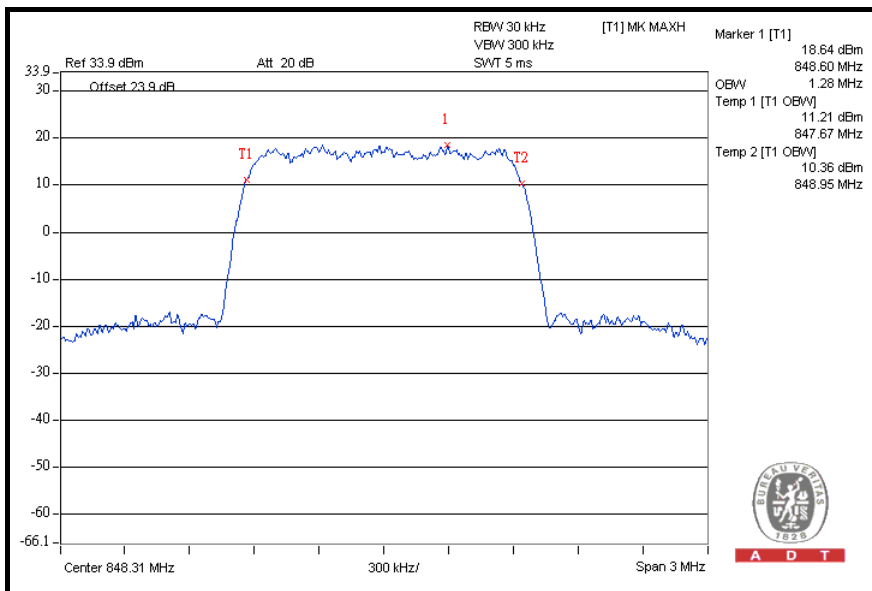




A D T

FOR EV-DO Rev. A:

| CHANNEL | FREQUENCY (MHz) | 99% OCCUPIED BANDWIDTH (MHz) |
|---------|-----------------|------------------------------|
| 1013 | 824.70 | 1.28 |
| 384 | 836.52 | 1.27 |
| 777 | 848.31 | 1.28 |


CH 1013

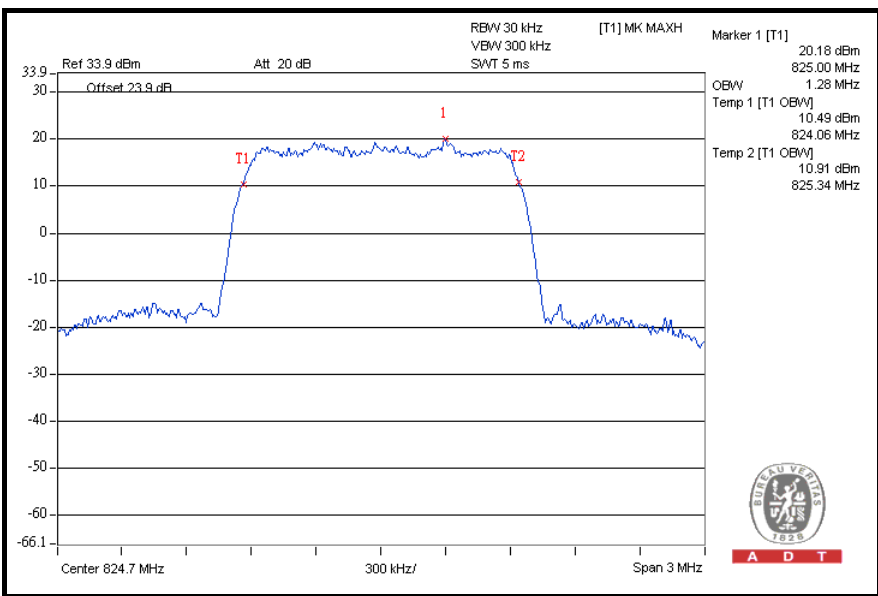

FOR EV-DO Rev. 0

| CHANNEL | FREQUENCY (MHz) | 99% OCCUPIED BANDWIDTH (MHz) |
|---------|-----------------|------------------------------|
| 1013 | 824.70 | 1.28 |
| 384 | 836.52 | 1.27 |
| 777 | 848.31 | 1.28 |

CH 1013

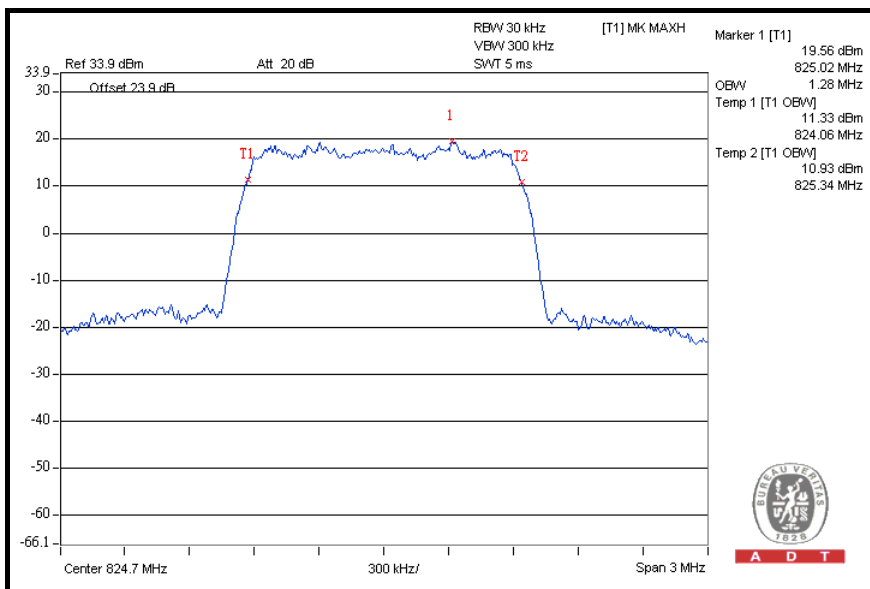


FOR WCDMA:

FOR WCDMA:

| CHANNEL | FREQUENCY (MHz) | 99% OCCUPIED BANDWIDTH (MHz) |
|---------|-----------------|------------------------------|
| 4132 | 826.4 | 4.20 |
| 4182 | 836.4 | 4.18 |
| 4233 | 846.6 | 4.20 |


CH 4233

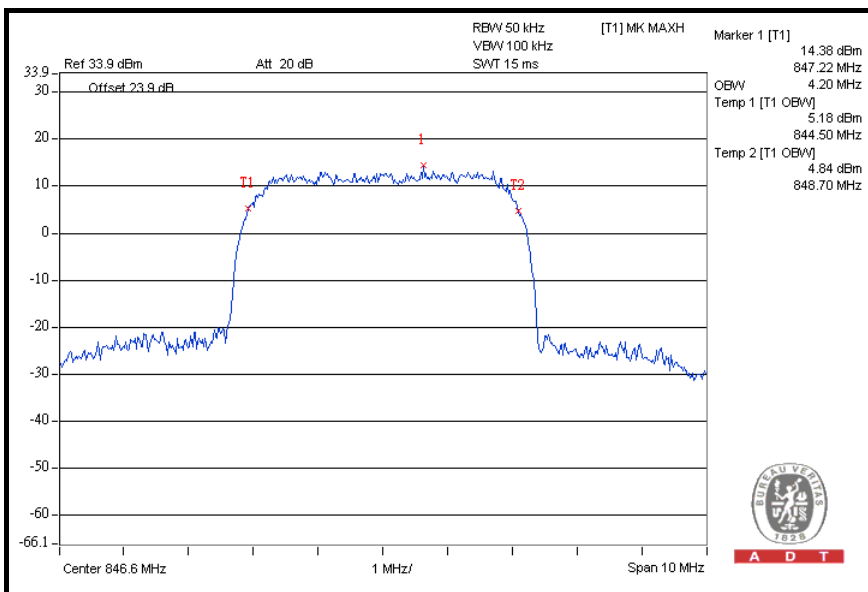

FOR HSDPA:

| CHANNEL | FREQUENCY (MHz) | 99% OCCUPIED BANDWIDTH (MHz) |
|---------|-----------------|------------------------------|
| 4132 | 826.4 | 4.20 |
| 4182 | 836.4 | 4.18 |
| 4233 | 846.6 | 4.18 |


CH 4132

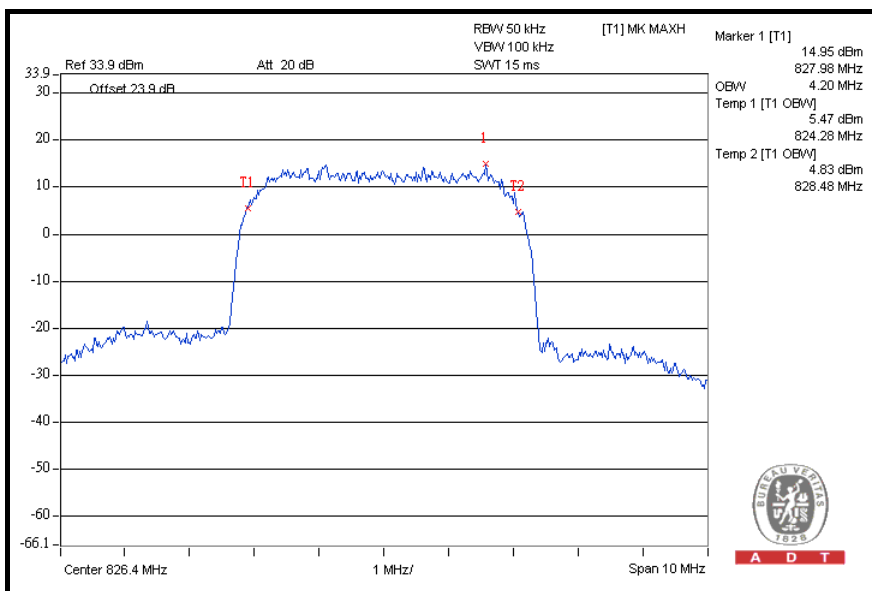

FOR HSUPA:

| CHANNEL | FREQUENCY (MHz) | 99% OCCUPIED BANDWIDTH (MHz) |
|---------|-----------------|------------------------------|
| 4132 | 826.4 | 4.20 |
| 4182 | 836.4 | 4.20 |
| 4233 | 846.6 | 4.20 |

CH 4233

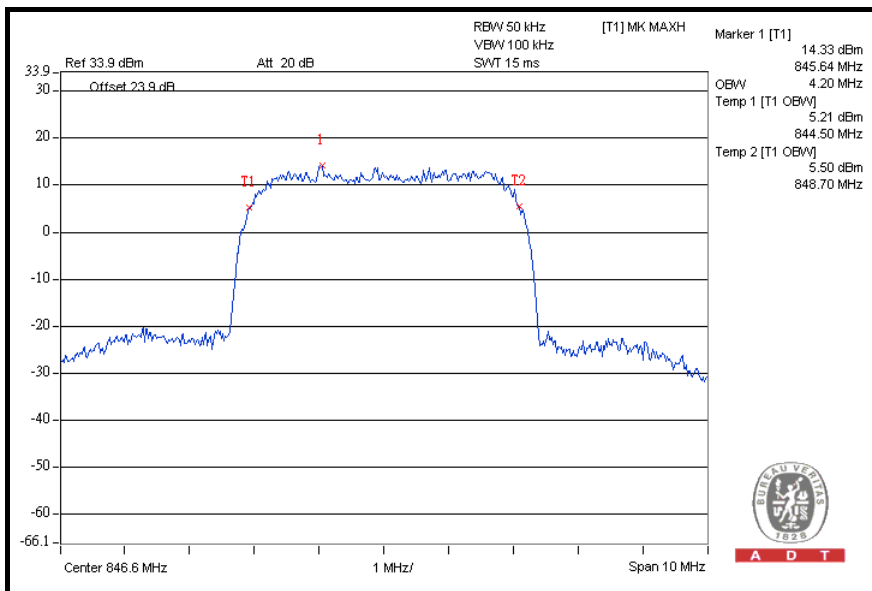

4.4 BAND EDGE MEASUREMENT

4.4.1 LIMITS OF BAND EDGE MEASUREMENT


According to FCC 22.917 specified that power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

4.4.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | DATE OF CALIBRATION | DUE DATE OF CALIBRATION |
|--------------------------------------|--------------|------------|---------------------|-------------------------|
| ROHDE & SCHWARZ Spectrum Analyzer | FSP40 | 100040 | Jul. 09, 2010 | Jul. 08, 2011 |
| Mini-Circuits Power Splitter | ZN2PD-9G | NA | Jun. 25, 2010 | Jun. 24, 2011 |
| RF cable | SUCOFLEX 104 | 274403/4 | Aug. 20, 2010 | Aug. 19, 2011 |
| RF cable | SUCOFLEX 104 | 250729/4 | Aug. 19, 2010 | Aug. 18, 2011 |
| RF cable | SUCOFLEX 104 | 214377/4 | Aug. 19, 2010 | Aug. 18, 2011 |
| JFW 20dB attenuation | 50HF-020-SMA | NA | NA | NA |

NOTE: The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

4.4.3 TEST SETUP

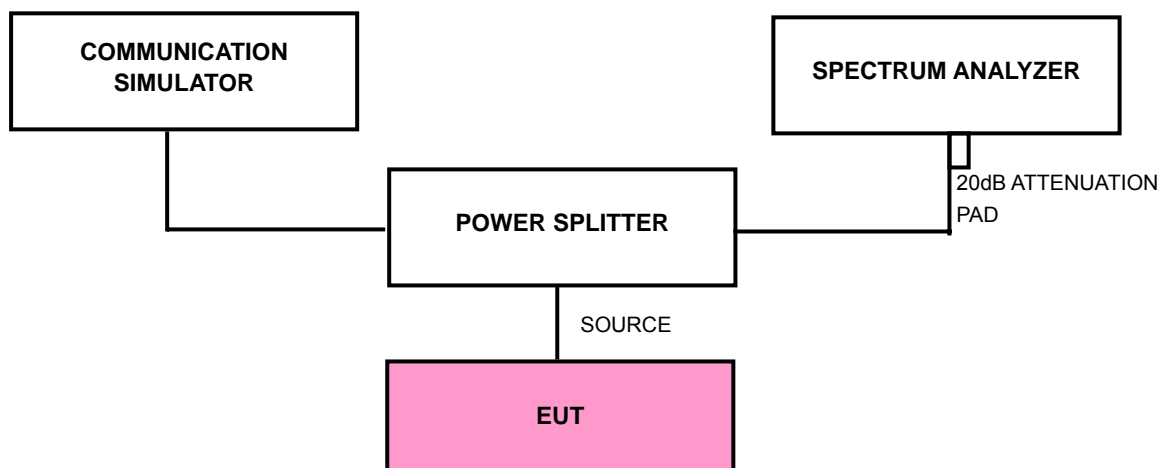

4.4.4 TEST PROCEDURES

- a. The EUT makes a call to the communication simulator. The power was measured with R&S Spectrum Analyzer. All measurements were done at 2 channels, 128 and 251 (GPRS/ E-GPRS) / 1013 and 777 (CDMA) / 4132 and 4233 (WCDMA) (low and high operational frequency range.)
- b. The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer. This splitter loss and cable loss is the worst loss 23.9dB in the transmitted path track.
- c. The center frequency of spectrum is the band edge frequency and span is 1.5 MHz. RB of the spectrum is 3kHz and VB of the spectrum is 10kHz (GPRS/ E-GPRS).
- d. The center frequency of spectrum is the band edge frequency and span is 3MHz. RB of the spectrum is 15kHz and VB of the spectrum is 15kHz (CDMA).
- e. The center frequency of spectrum is the band edge frequency and span is 10MHz. RB of the spectrum is 100kHz and VB of the spectrum is 300kHz (WCDMA).
- f. Record the max trace plot into the test report.

4.4.5 EUT OPERATING CONDITION


- a. The EUT makes a call to the communication simulator.
- b. The communication simulator station system controlled an EUT to export maximum output power under transmission mode and specific channel frequency.

4.4.6 TEST RESULTS


FOR GPRS / E-GPRS:

FOR GPRS MODE (UP-LINK WITH 1 TIME SLOT)

LOWER BAND EDGE

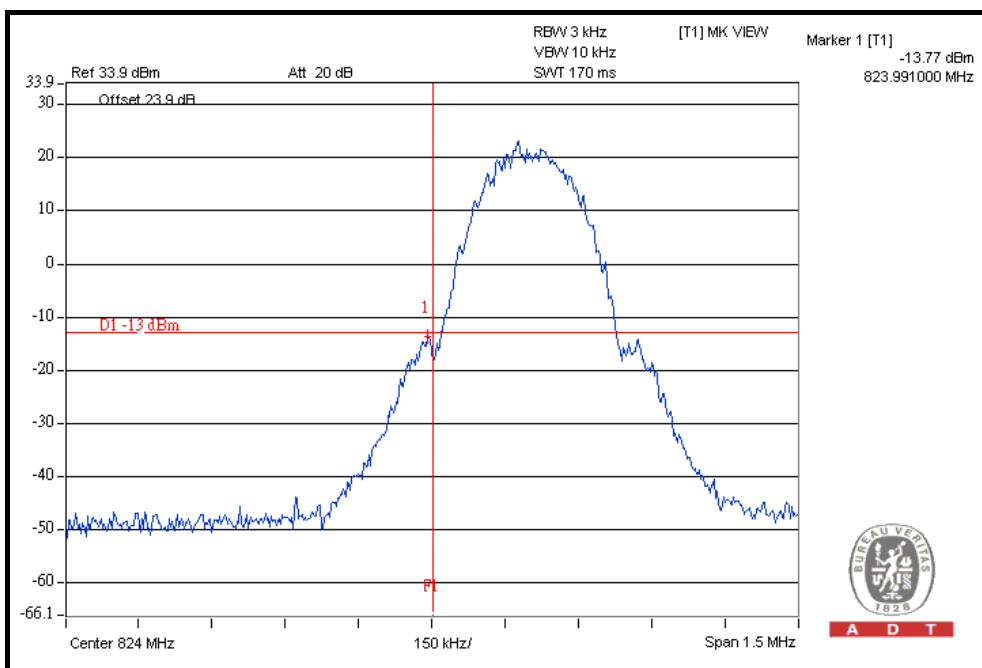


HIGHER BAND EDGE

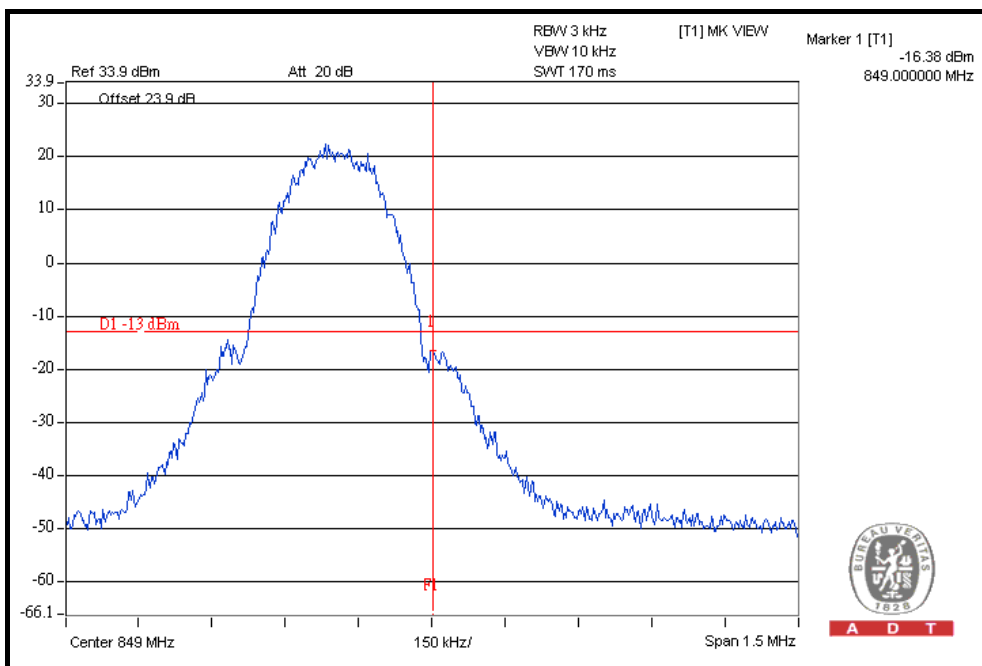


FOR E-GPRS MODE (UP-LINK WITH 1 TIME SLOT)

LOWER BAND EDGE

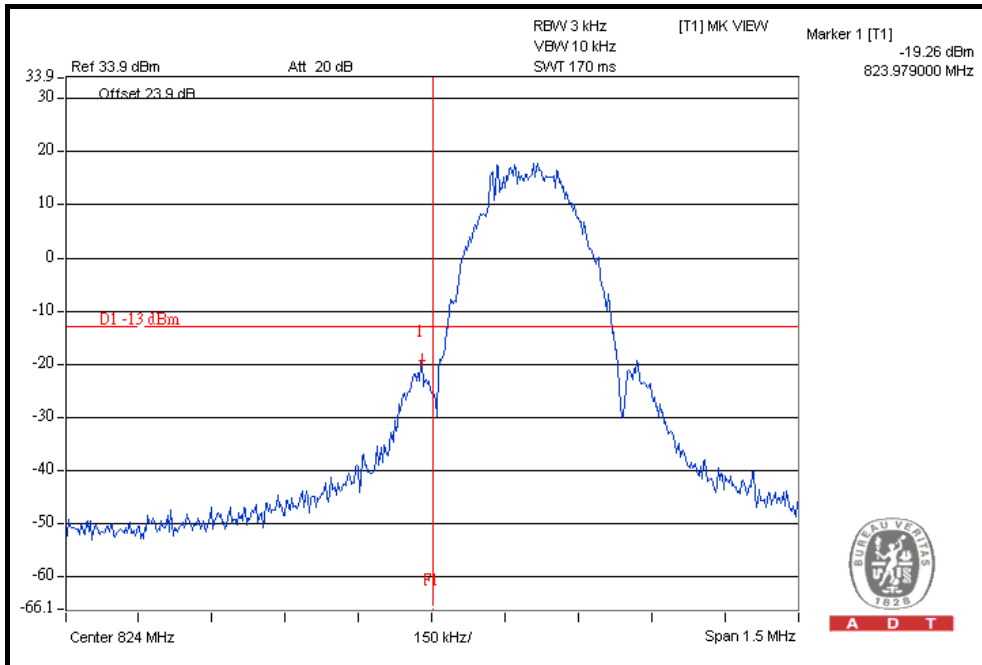


HIGHER BAND EDGE

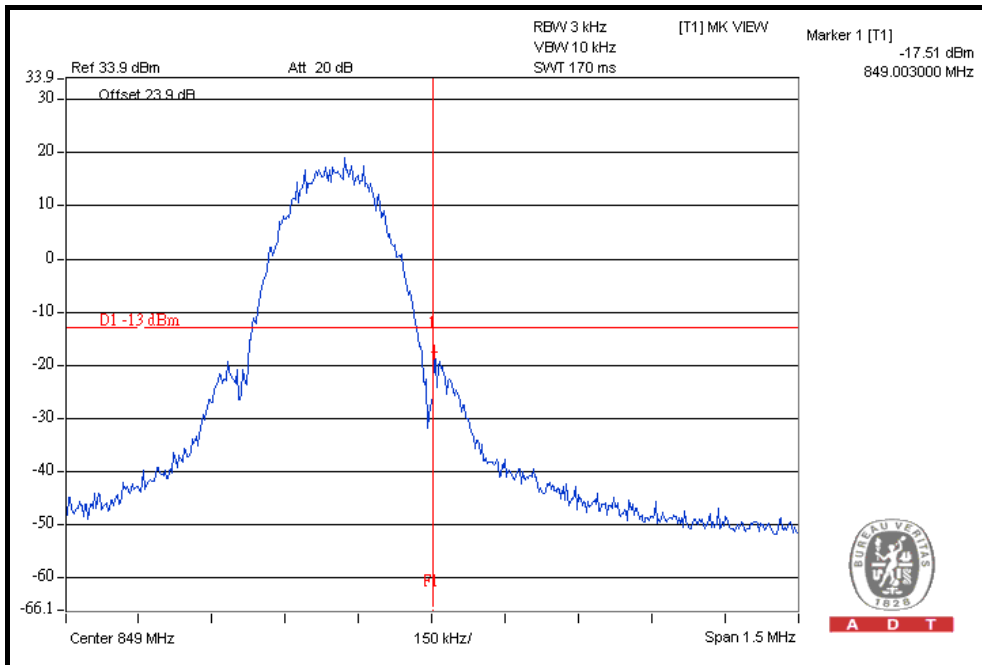


FOR CDMA:

FOR SO55:


LOWER BAND EDGE

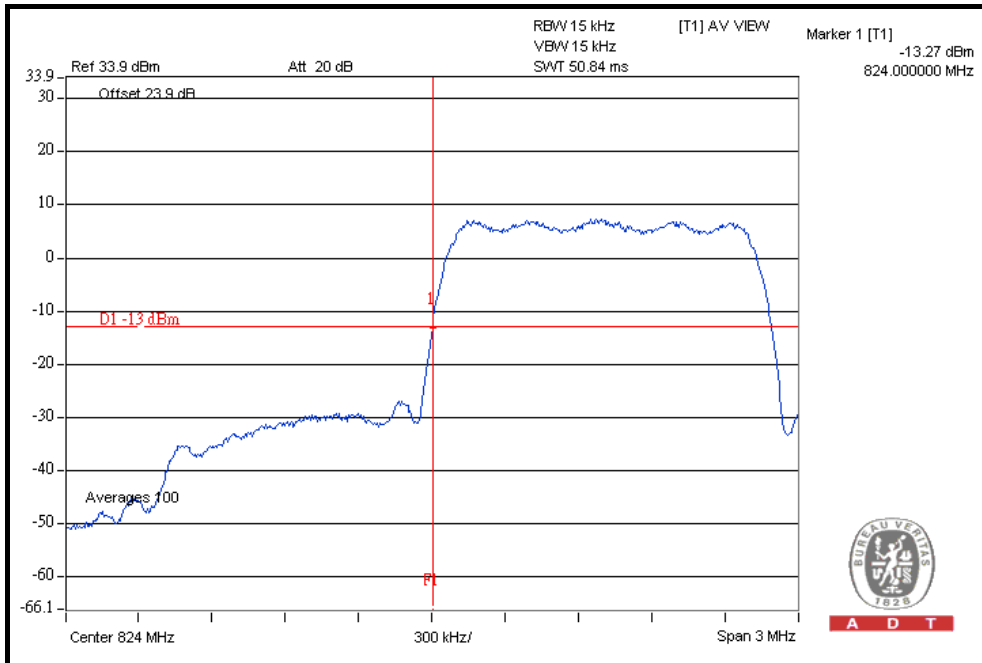


HIGHER BAND EDGE

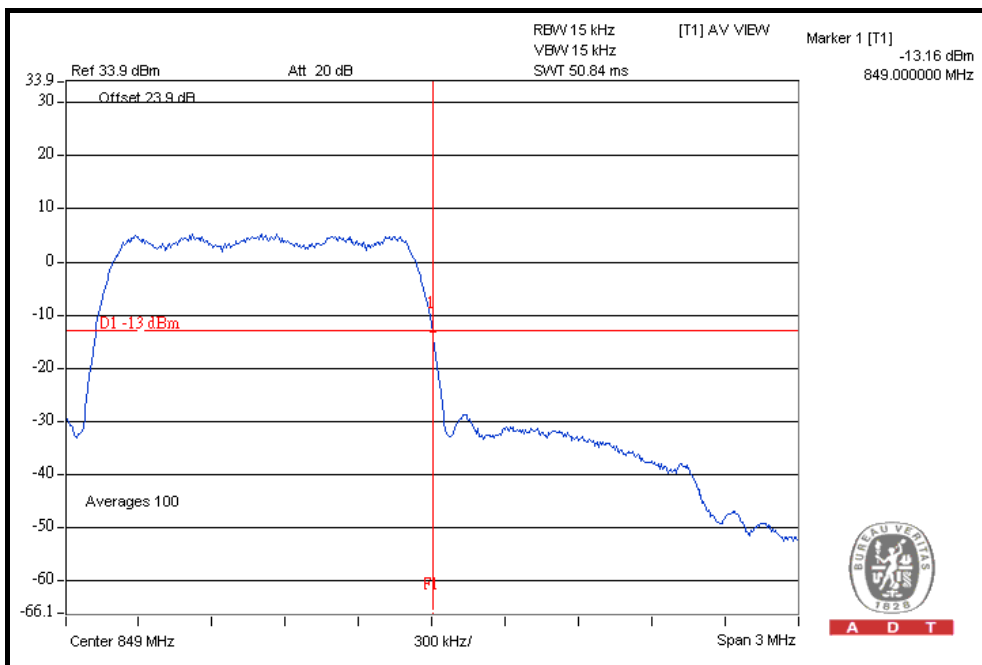


**FOR EV-DO Rev. A:
LOWER BAND EDGE**

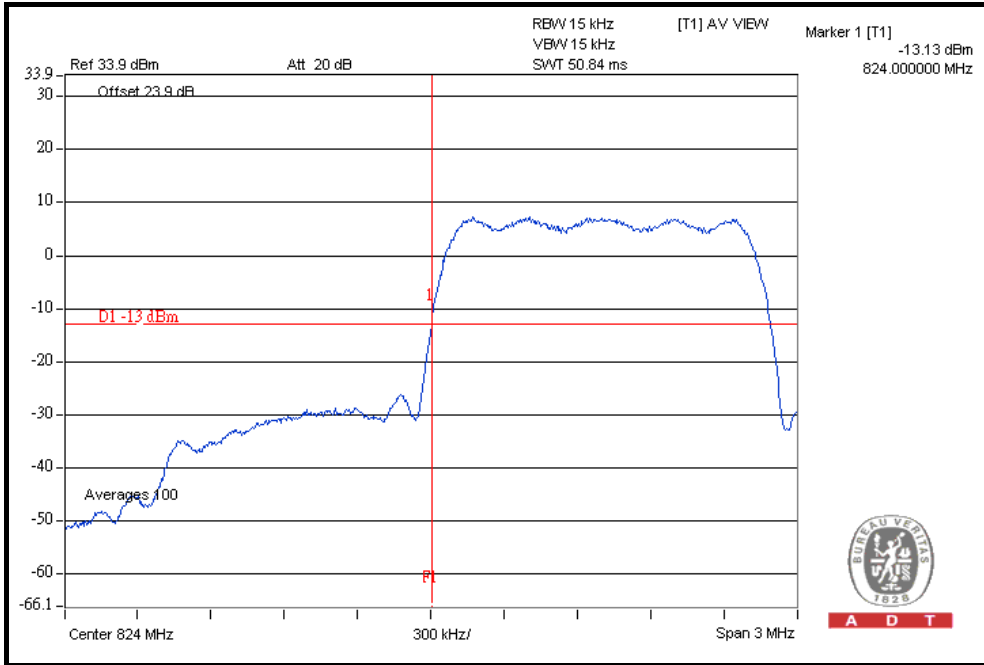


HIGHER BAND EDGE

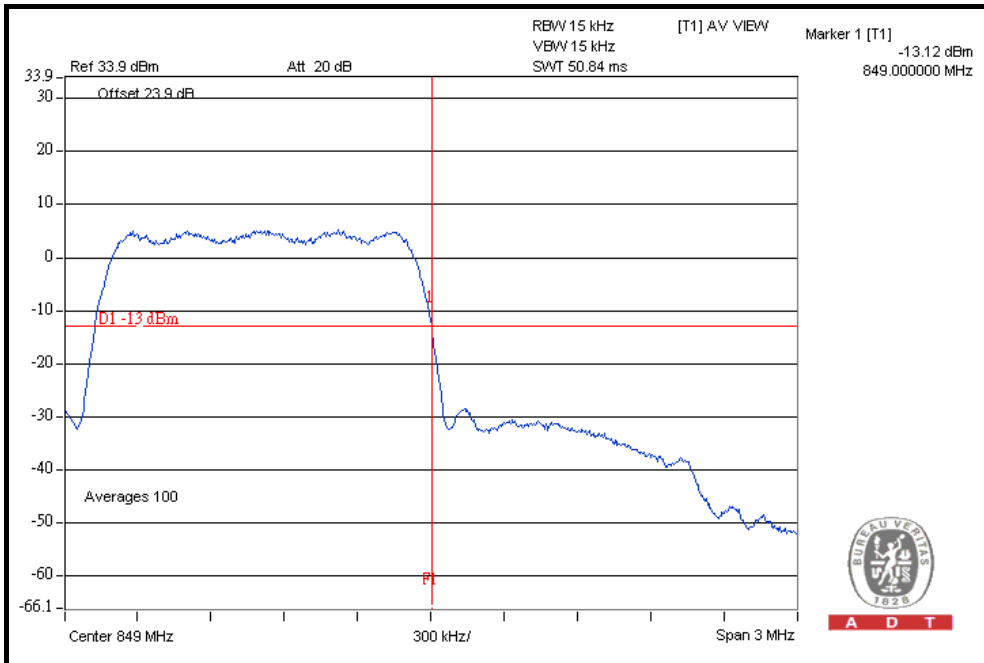

**FOR EV-DO Rev. 0:
LOWER BAND EDGE**

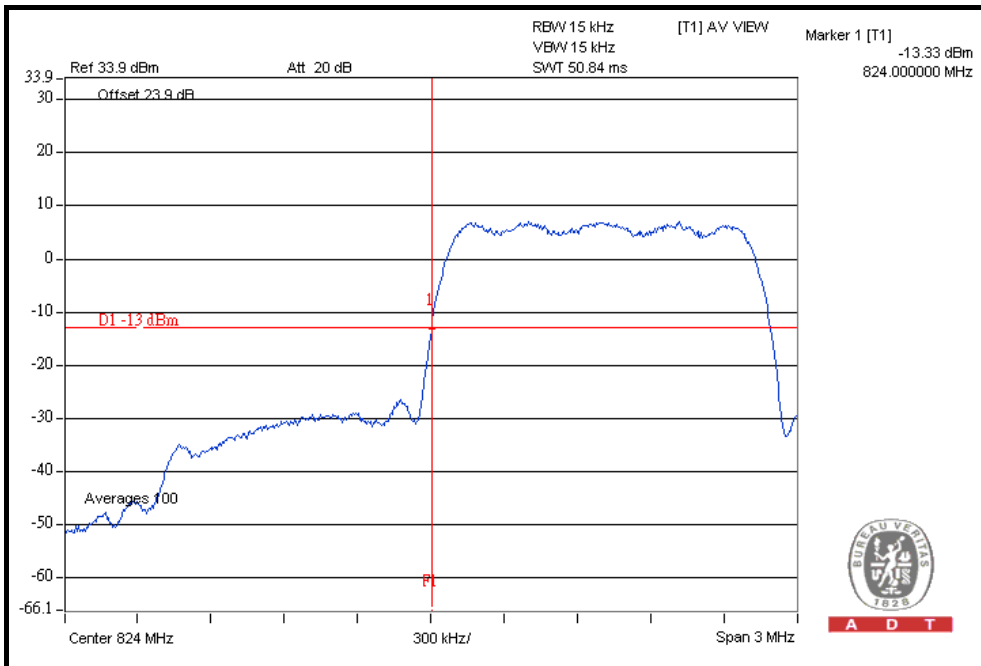


HIGHER BAND EDGE

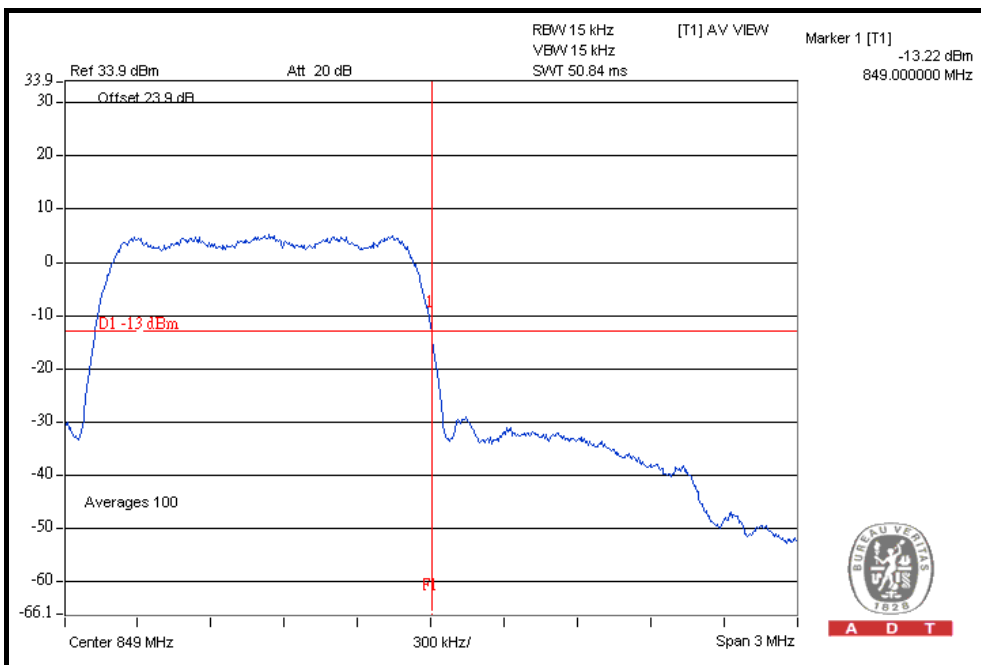


FOR WCDMA:

WCDMA-RMC MODE

LOWER BAND EDGE

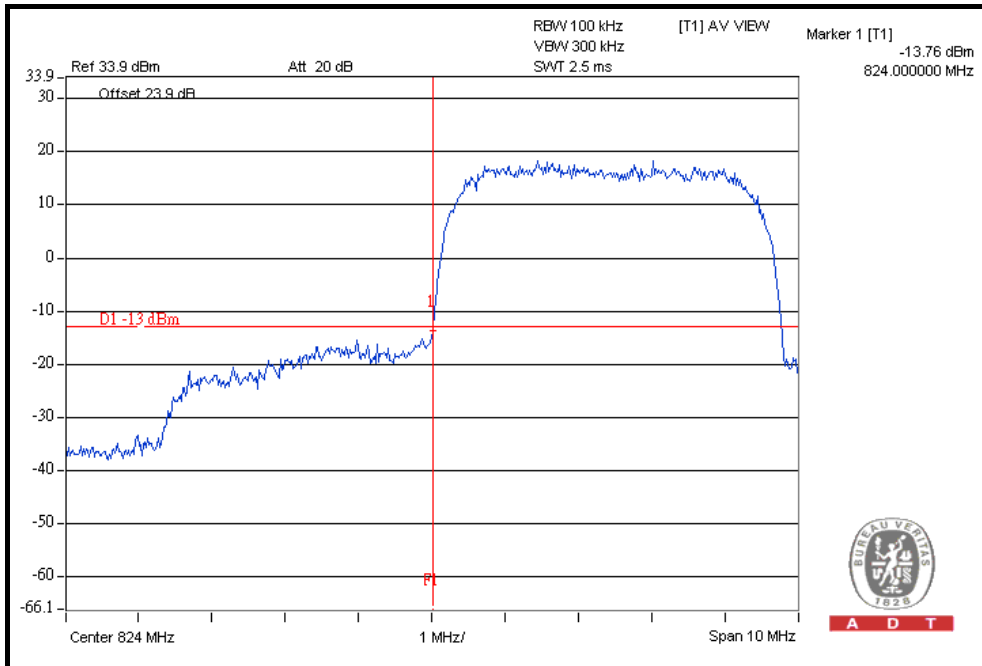


HIGHER BAND EDGE

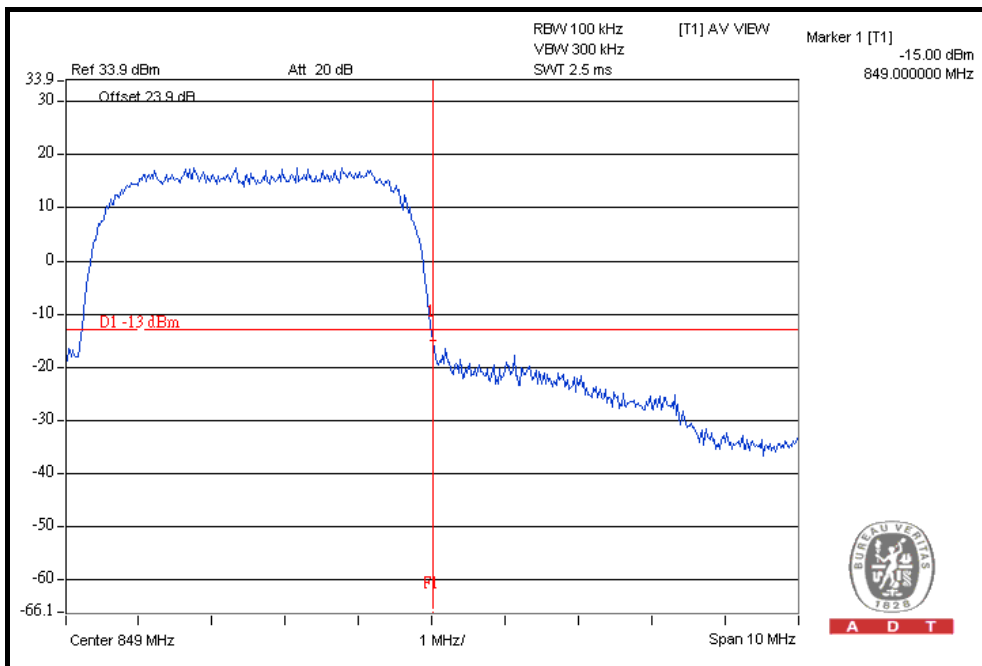


HSDPA MODE

LOWER BAND EDGE

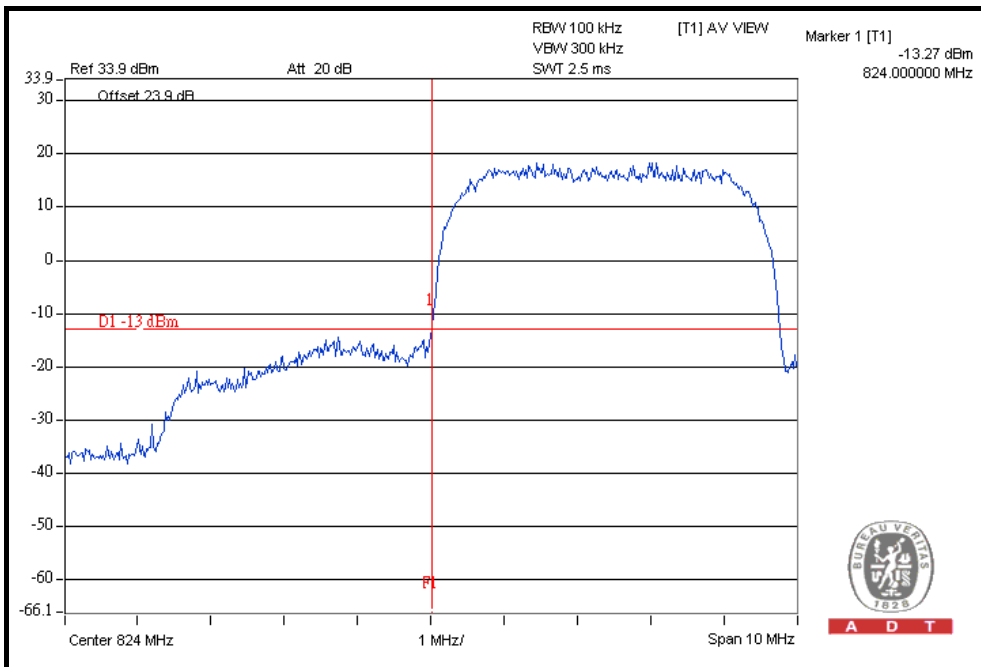

HIGHER BAND EDGE

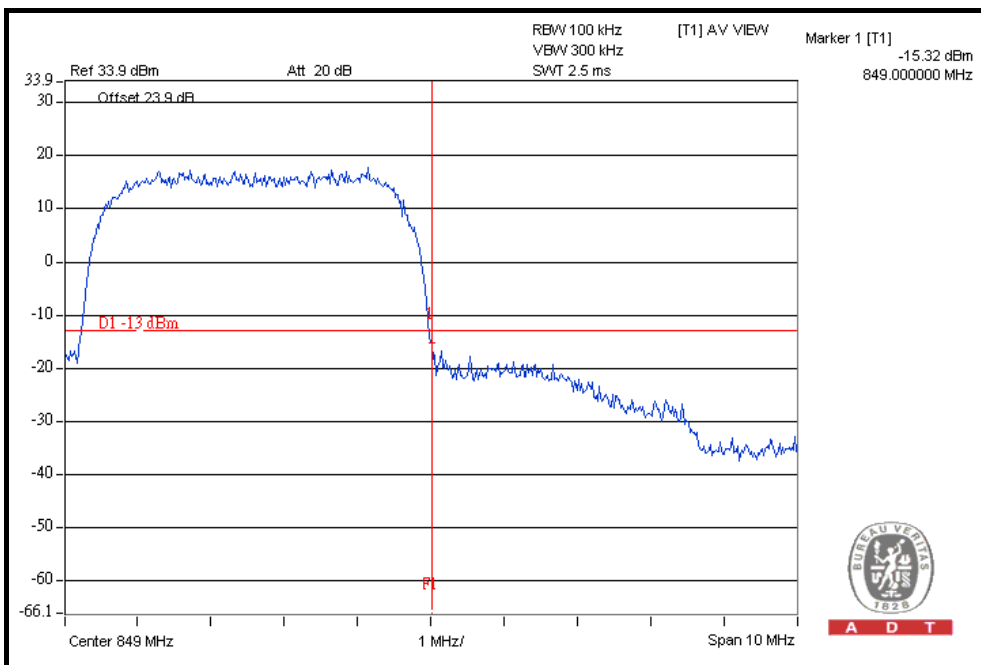





A D T

HSUPA MODE

LOWER BAND EDGE

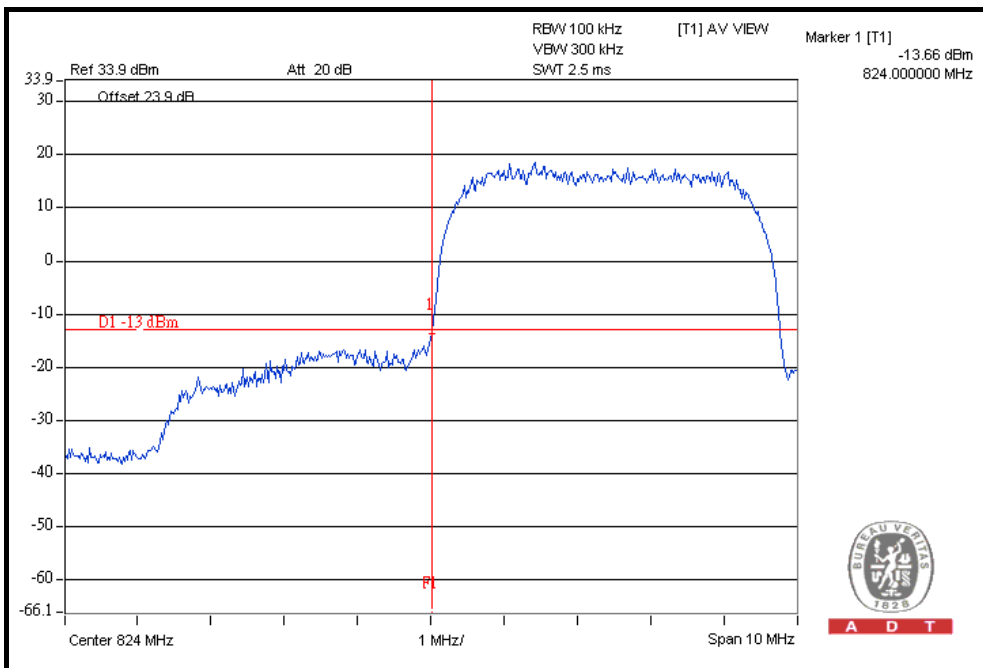

HIGHER BAND EDGE

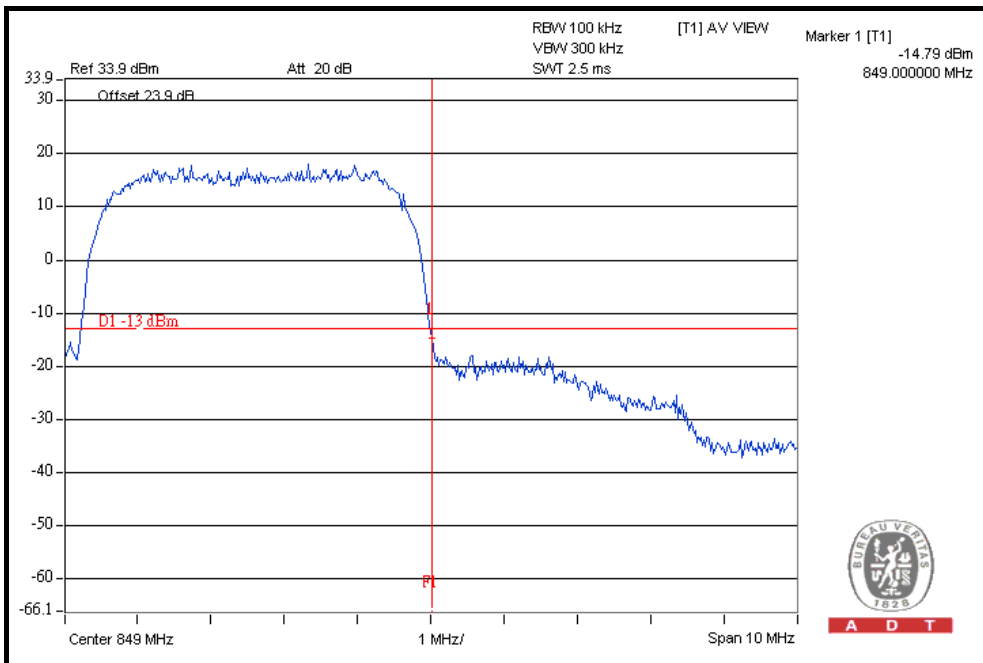

4.5 CONDUCTED SPURIOUS EMISSIONS

4.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

In the FCC 22.917, On any frequency outside a licensee's frequency block within GPRS spectrum, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB. The emission limit equal to -13dBm .

4.5.2 TEST INSTRUMENTS


| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | DATE OF CALIBRATION | DUE DATE OF CALIBRATION |
|--|---------------------------------|------------|---------------------|-------------------------|
| ROHDE & SCHWARZ Spectrum Analyzer | FSP40 | 100040 | Jul. 09, 2010 | Jul. 08, 2011 |
| Wainwright Instruments Band Reject Filter | WRCG 824/849-810/ 863-60/9SS | SN1 | Mar. 25, 2010 | Mar. 24, 2011 |
| WI Highpass filter | WHK1.5/15G-10ST | SN1 | Mar. 30, 2010 | Mar. 29, 2011 |
| Mini-Circuits Power Splitter | ZN2PD-9G | NA | Jun. 25, 2010 | Jun. 24, 2011 |
| RF cable | SUCOFLEX 104 | 274403/4 | Aug. 20, 2010 | Aug. 19, 2011 |
| RF cable | SUCOFLEX 104 | 250729/4 | Aug. 19, 2010 | Aug. 18, 2011 |
| RF cable | SUCOFLEX 104 | 214377/4 | Aug. 19, 2010 | Aug. 18, 2011 |
| JFW 20dB attenuation | 50HF-020-SMA | NA | NA | NA |

NOTE: The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE

- a. The EUT makes a phone call to the communication simulator. The power was measured with R&S Spectrum Analyzer. All measurements were done at 3 channels, 128, 190 and 251 (GPRS) / 1013, 384 and 777 (CDMA) / 4132, 4182 and 4233 (WCDMA) (low, middle and high operational frequency range.)
- b. The conducted spurious emission used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer. This splitter loss and cable loss are the worst loss 23.9dB in the transmitted path track.
- c. When the spectrum scanned from 9kHz to 1GHz, it shall be connected to the band reject filter attenuated the carried frequency. The spectrum set RB=1MHz, VB=3MHz.
- d. When the spectrum scanned from 1GHz to 9GHz, it shall be connected to the high pass filter attenuated the carried frequency. The spectrum set RB=1MHz, VB=3MHz.

4.5.4 TEST SETUP

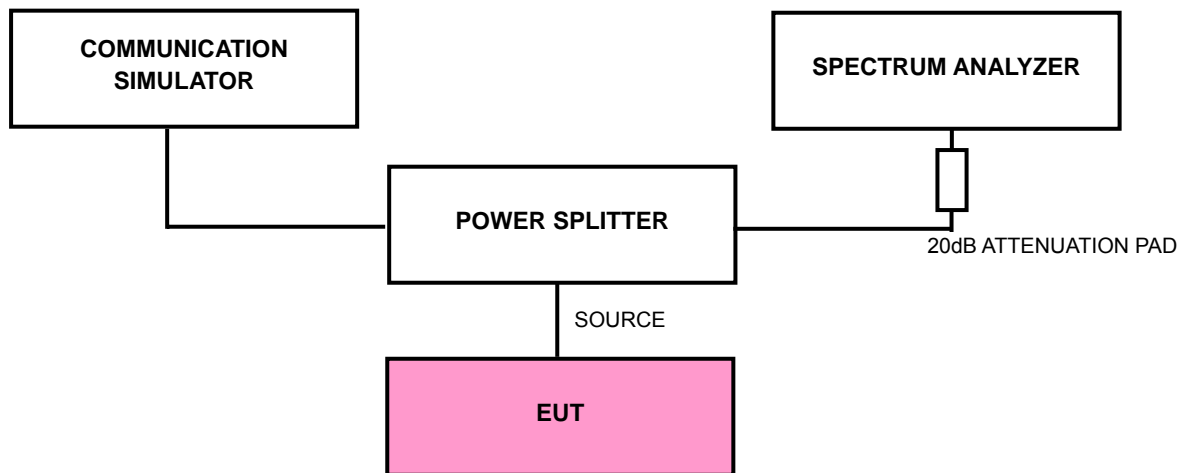


4.5.5 EUT OPERATING CONDITIONS

- a. The EUT makes a phone call to the communication simulator.
- b. The communication simulator station system controlled an EUT to export maximum output power under transmission mode and specific channel frequency.


4.5.6 TEST RESULTS

FOR GPRS:

CH 128: 9kHz ~ 1GHz

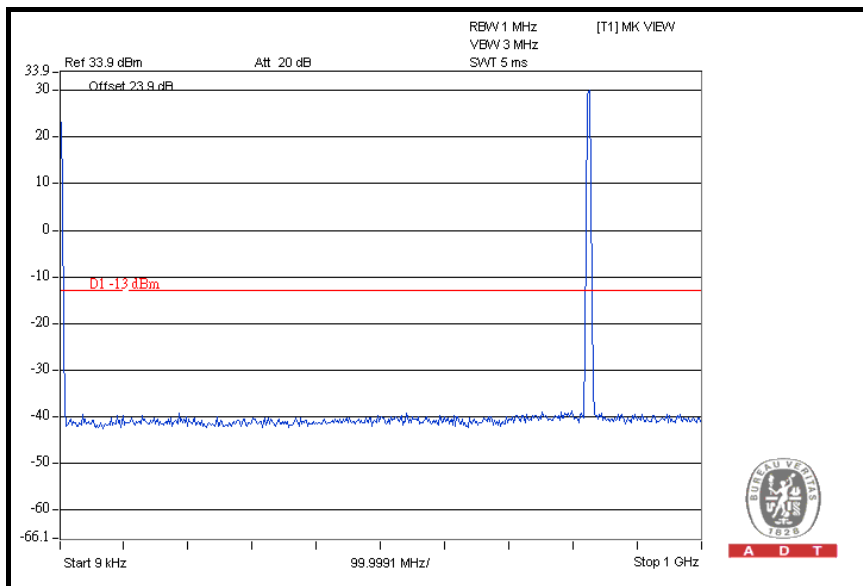


1GHz ~ 4GHz

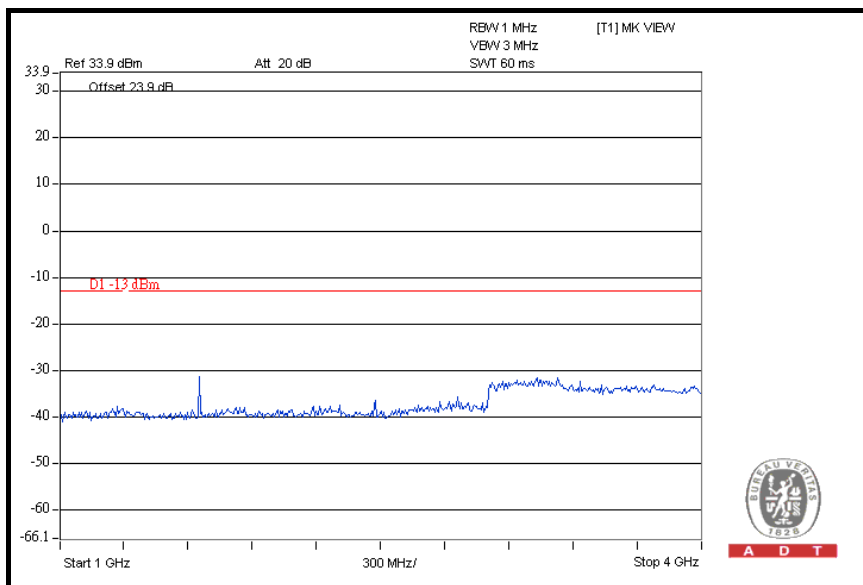




A D T


4GHz ~ 7GHz

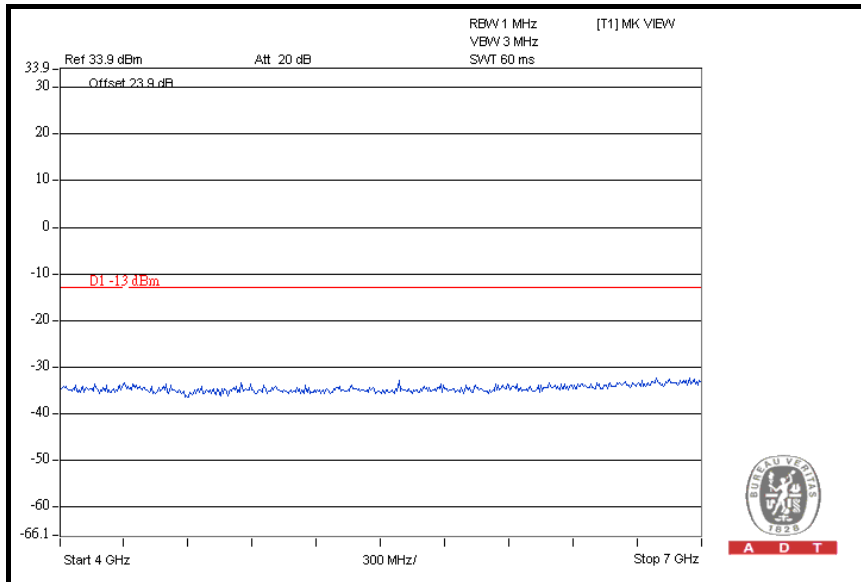


7GHz ~ 9GHz

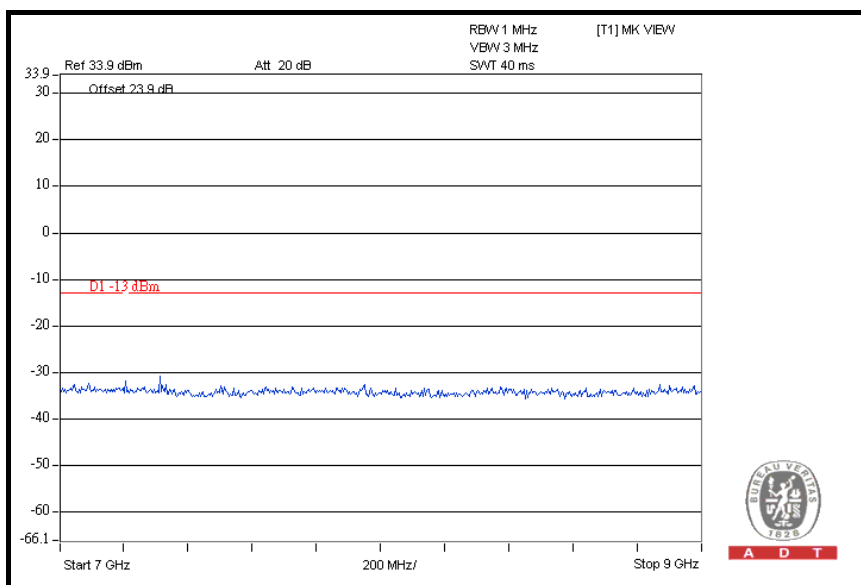


CH 190: 9kHz ~ 1GHz

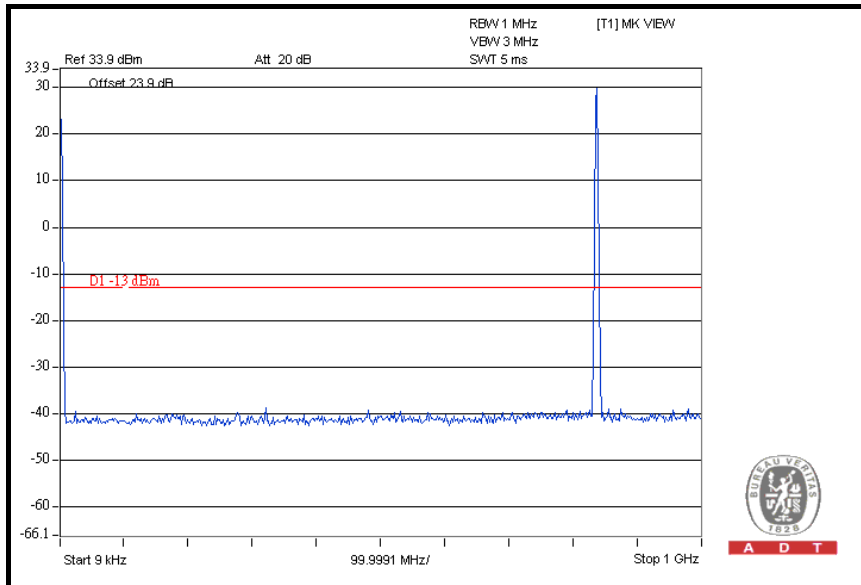


1GHz ~ 4GHz

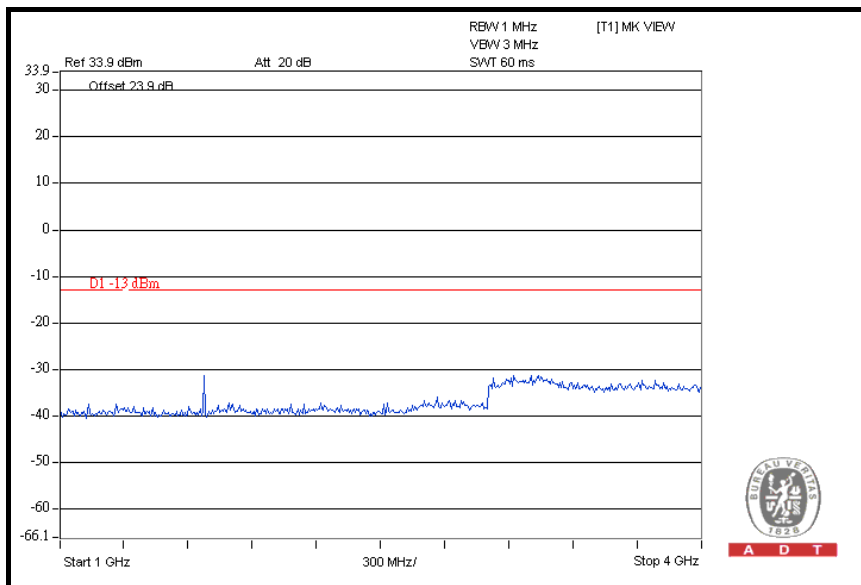


4GHz ~ 7GHz

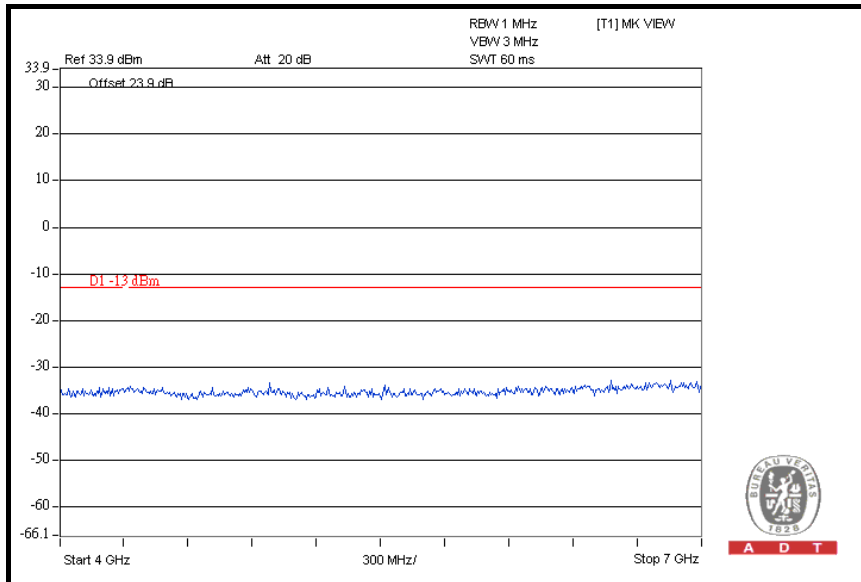


7GHz ~ 9GHz

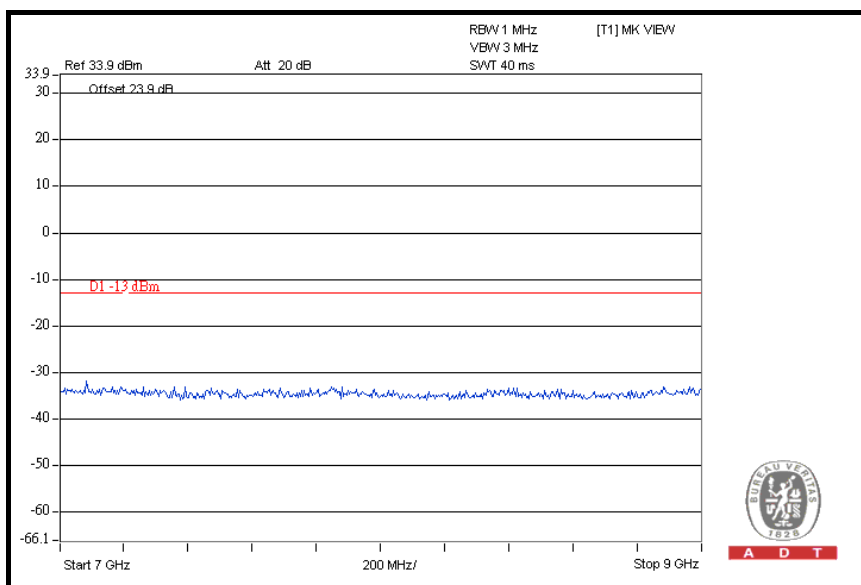

CH 251: 9kHz ~ 1GHz

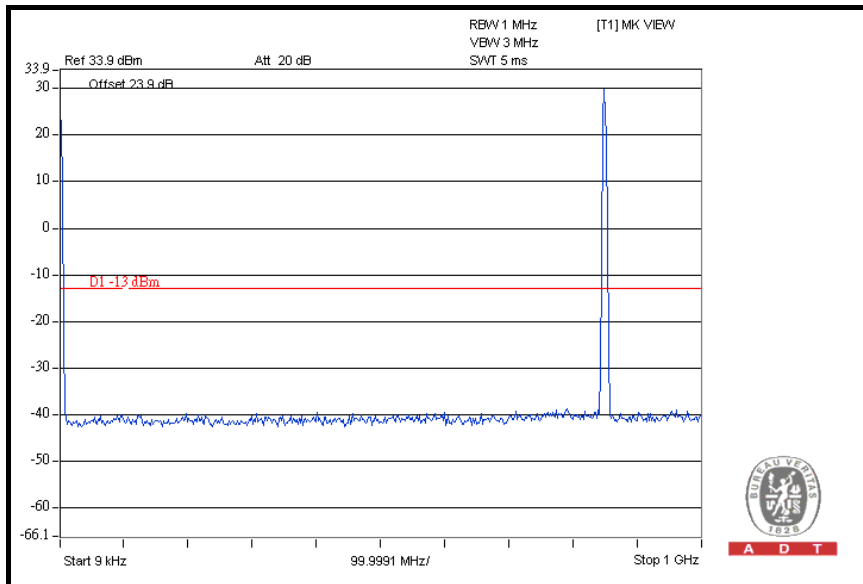


1GHz ~ 4GHz

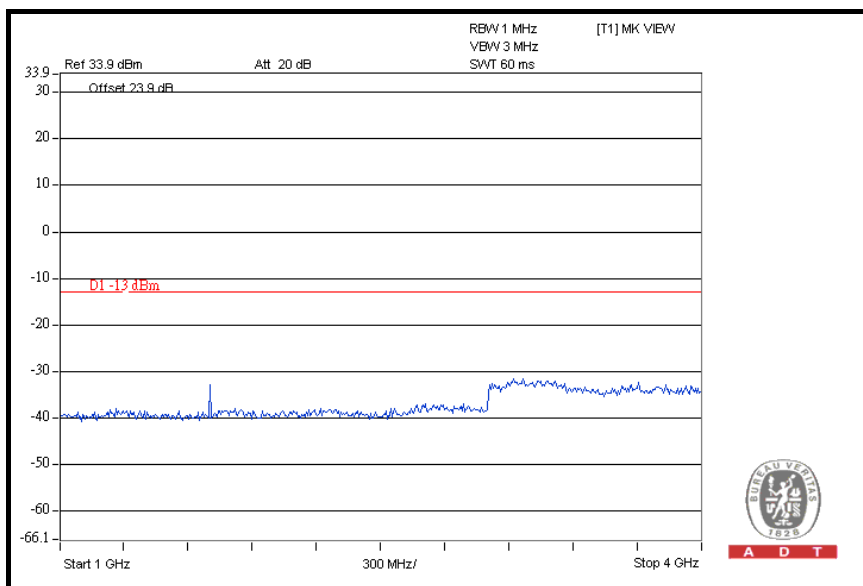




A D T

4GHz ~ 7GHz

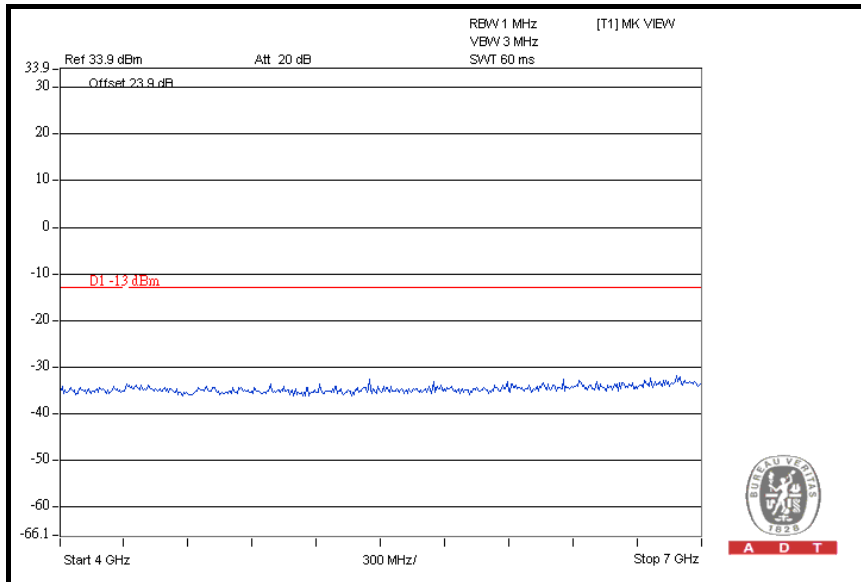


7GHz ~ 9GHz

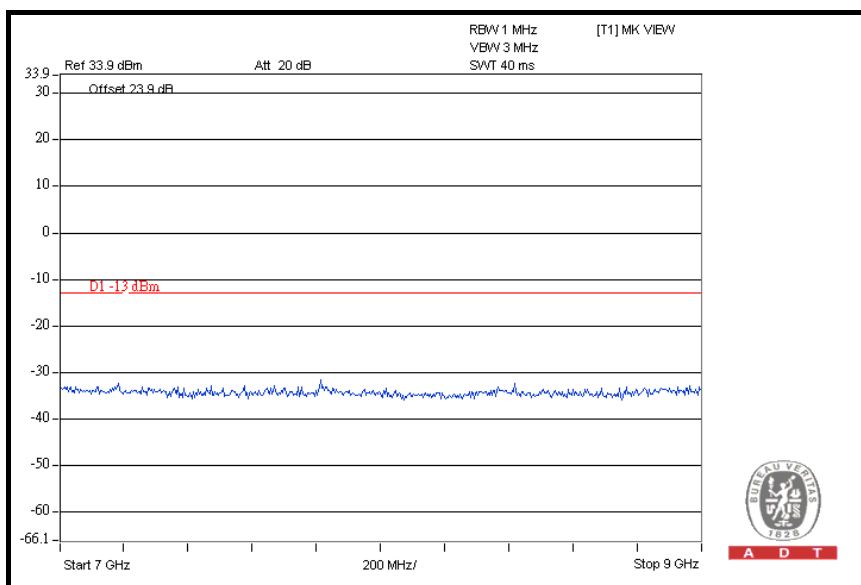


FOR CDMA:

CH 1013: 9kHz ~ 1GHz

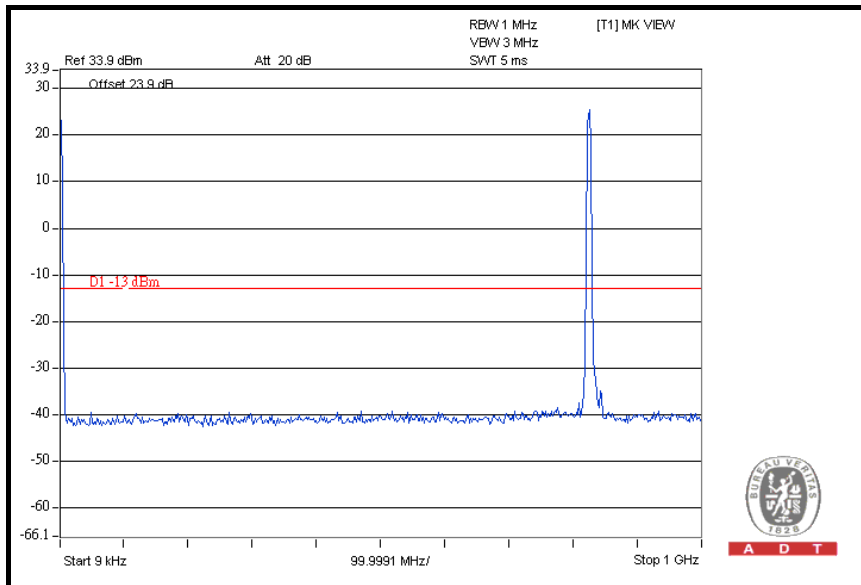


1GHz ~ 4GHz

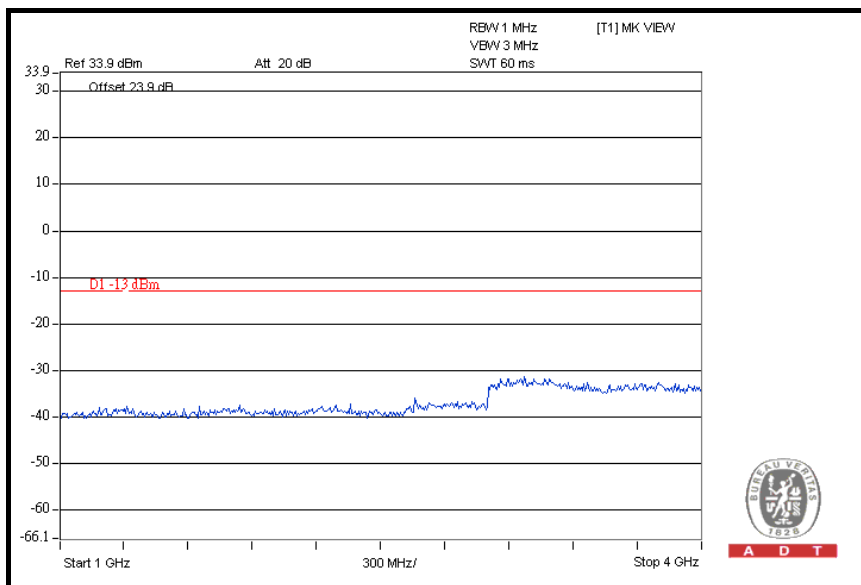




A D T


4GHz ~ 7GHz

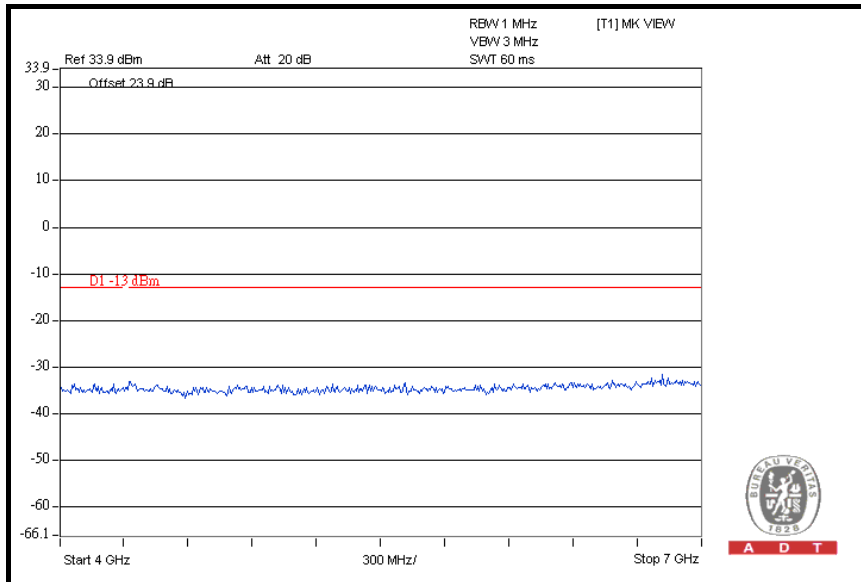


7GHz ~ 9GHz

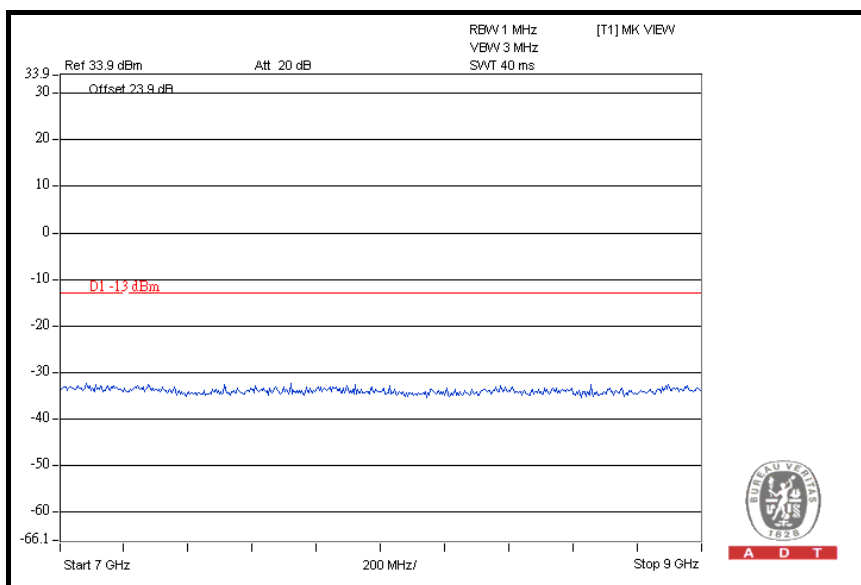


CH 384: 9kHz ~ 1GHz

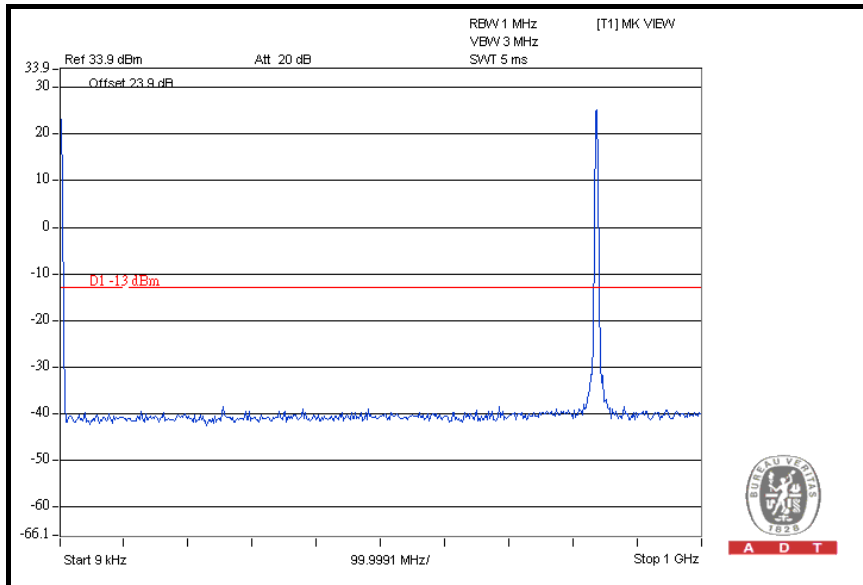


1GHz ~ 4GHz

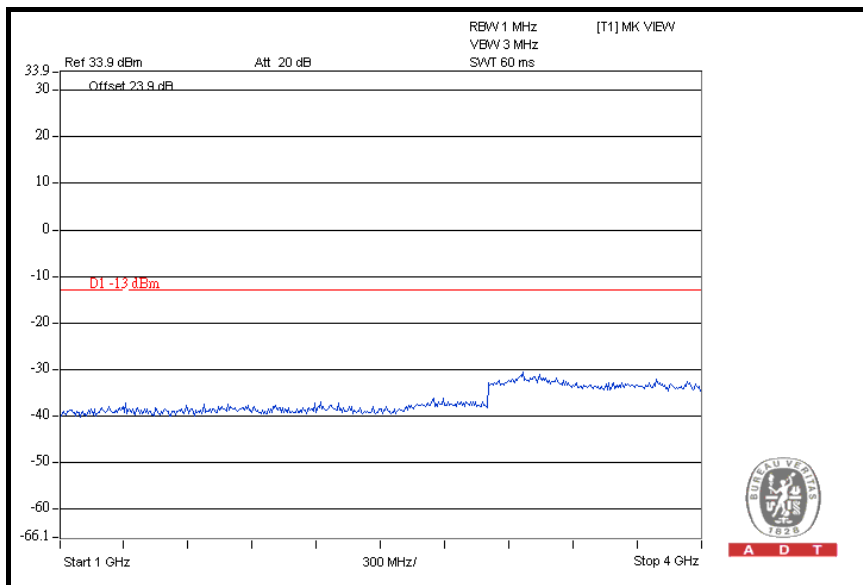


4GHz ~ 7GHz

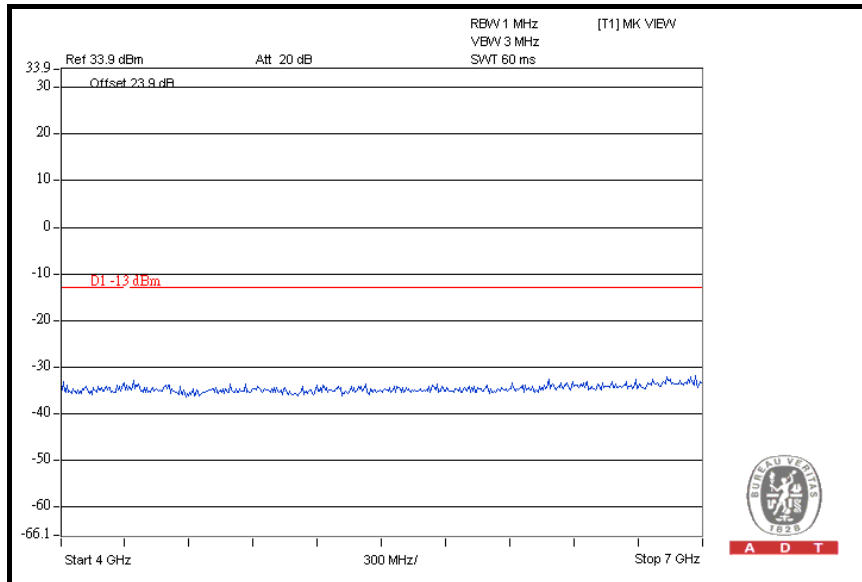


7GHz ~ 9GHz

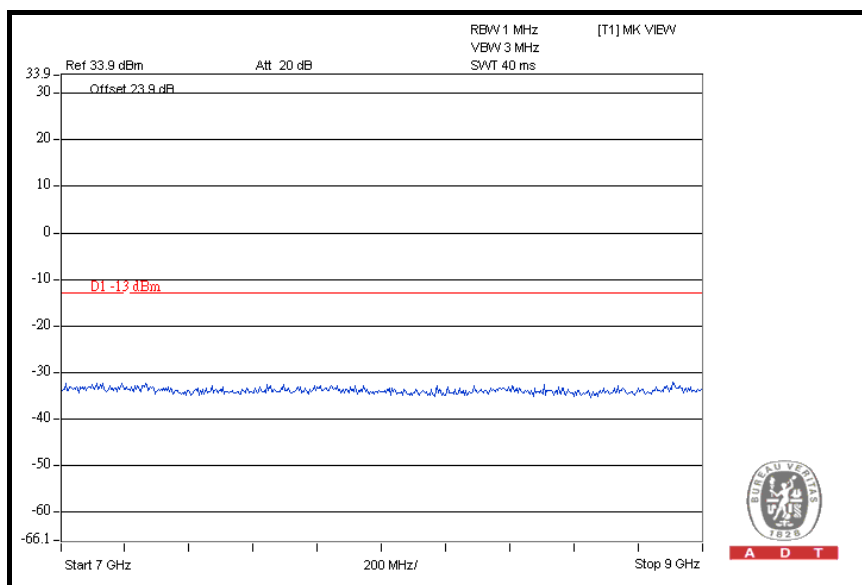


CH 777: 9kHz ~ 1GHz

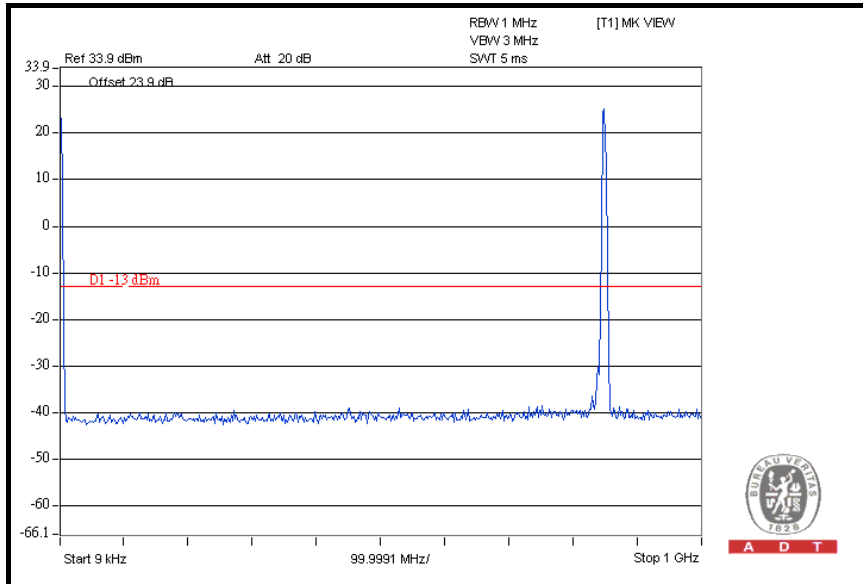


1GHz ~ 4GHz

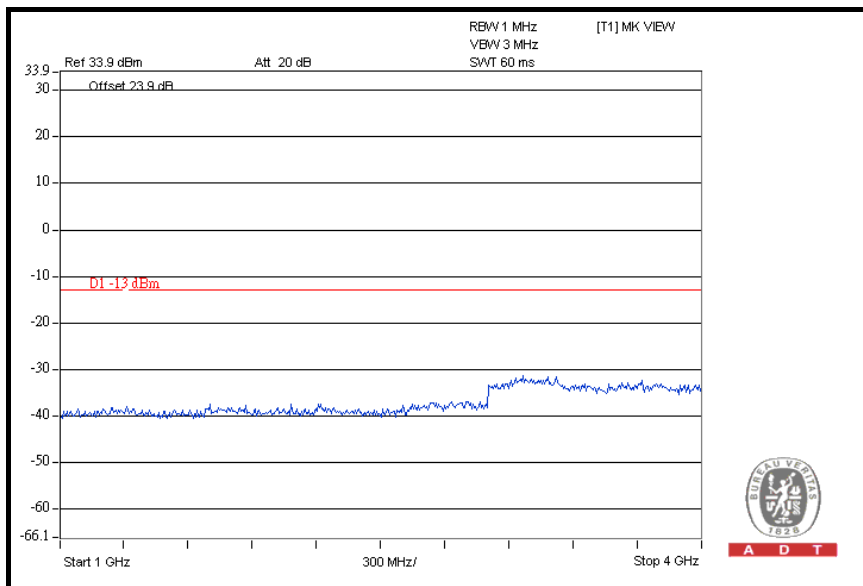

4GHz ~ 7GHz

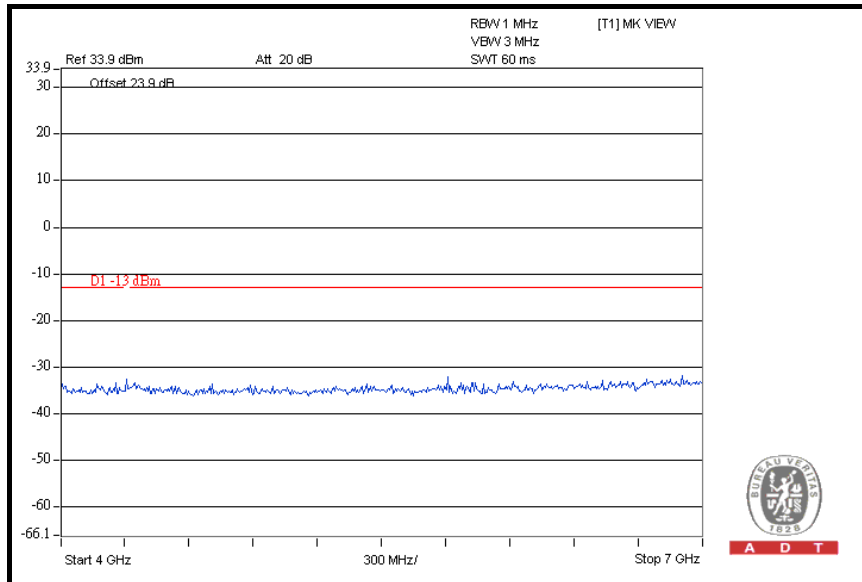


7GHz ~ 9GHz

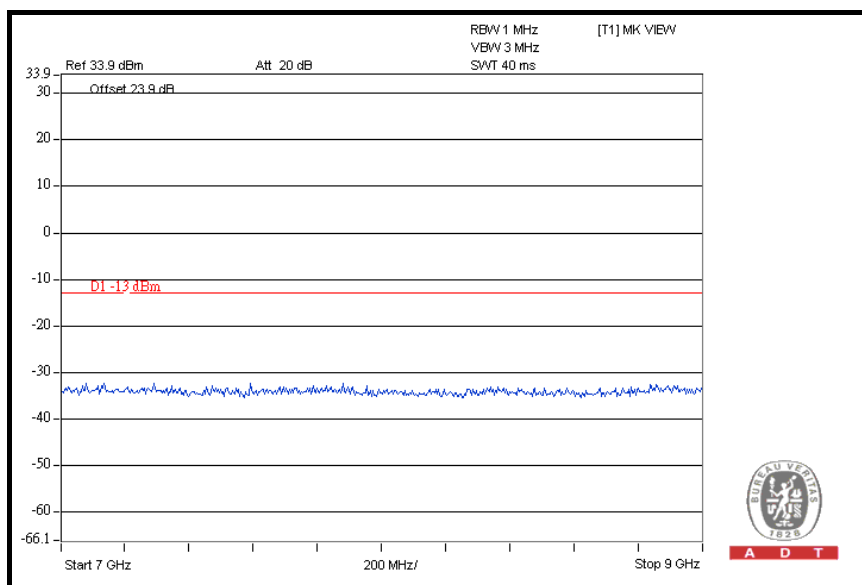


FOR WCDMA:


CH 4132: 9kHz ~ 1GHz

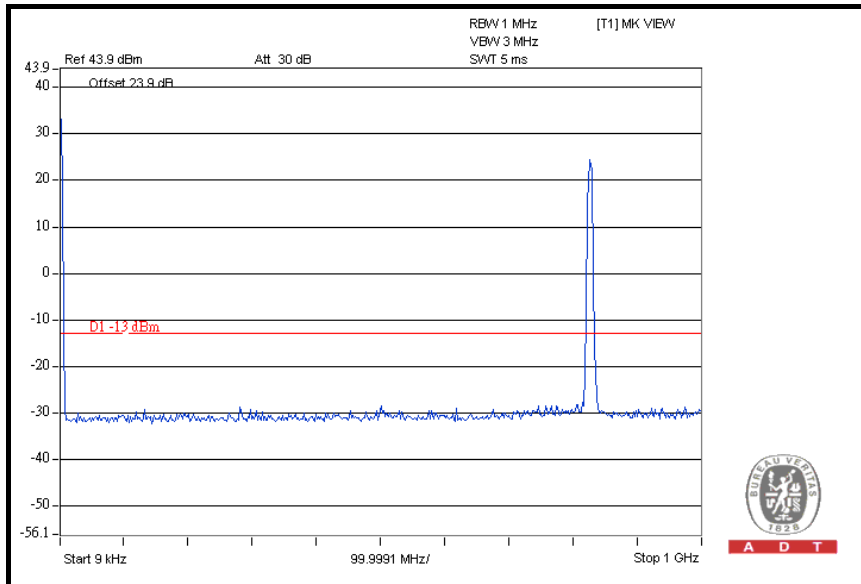


1GHz ~ 4GHz

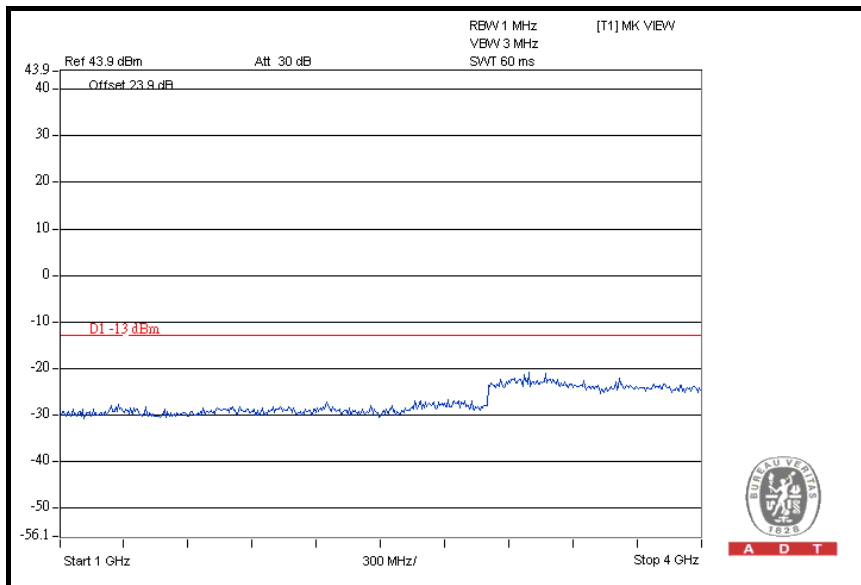


4GHz ~ 7GHz

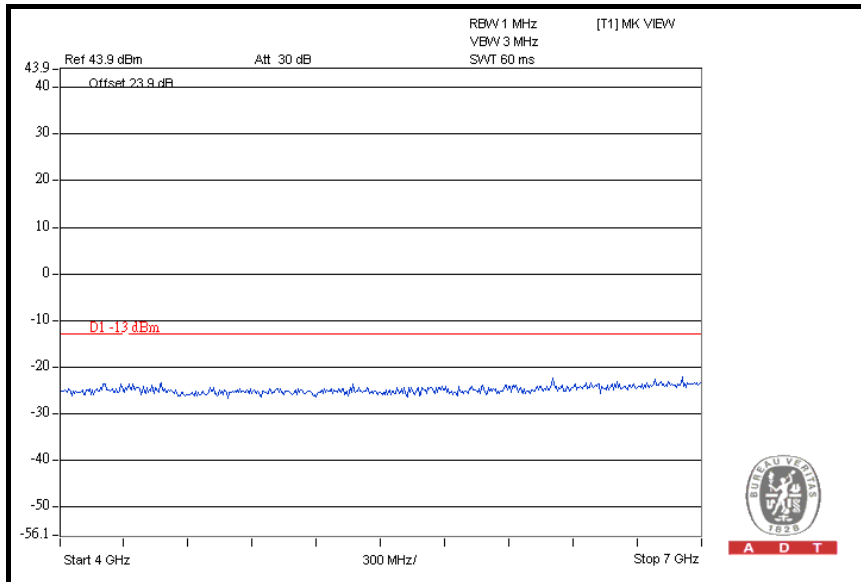


7GHz ~ 9GHz

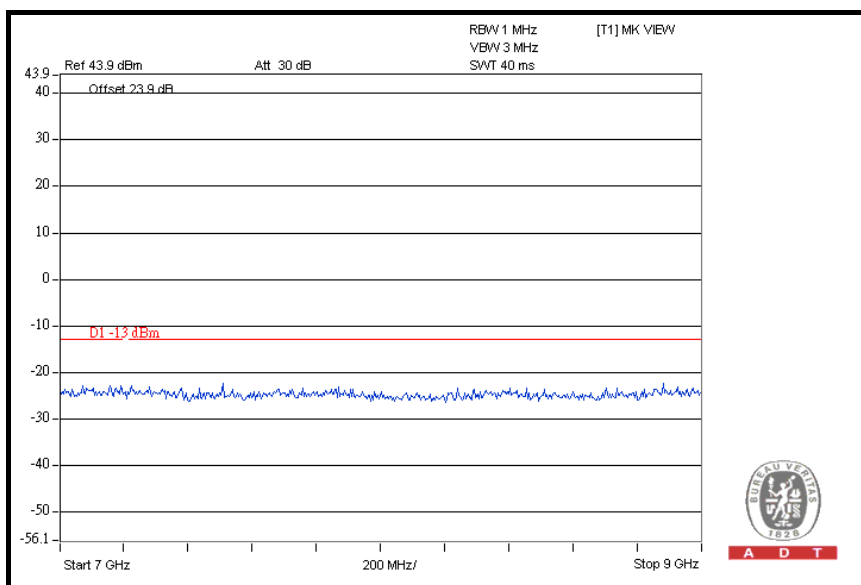


CH 4182: 9kHz ~ 1GHz

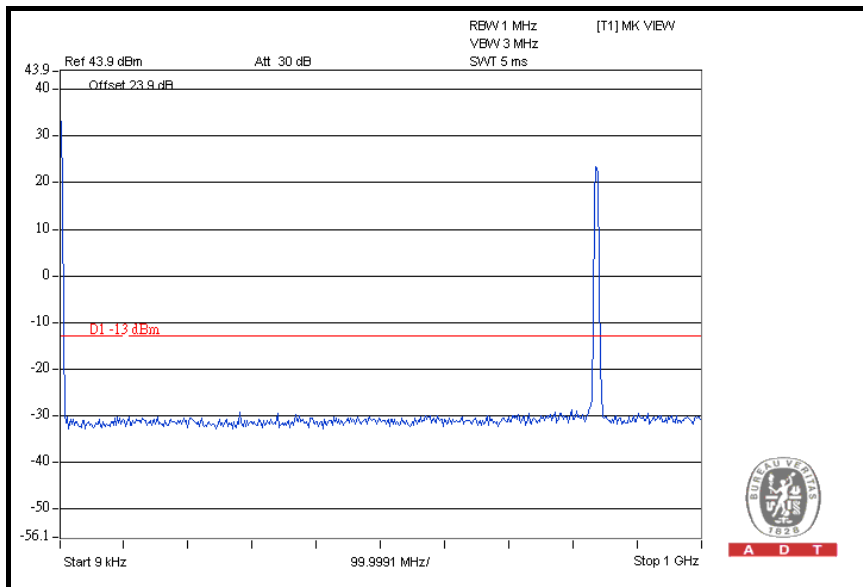


1GHz ~ 4GHz

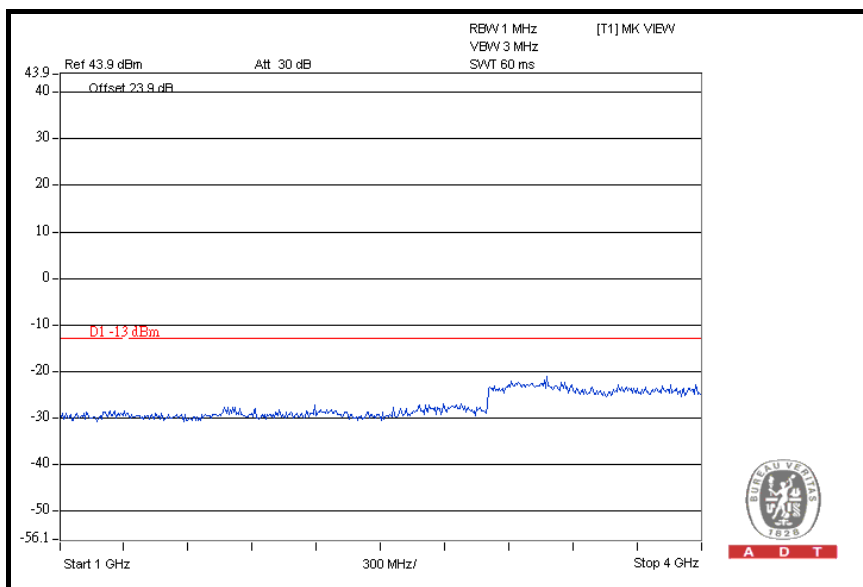


4GHz ~ 7GHz

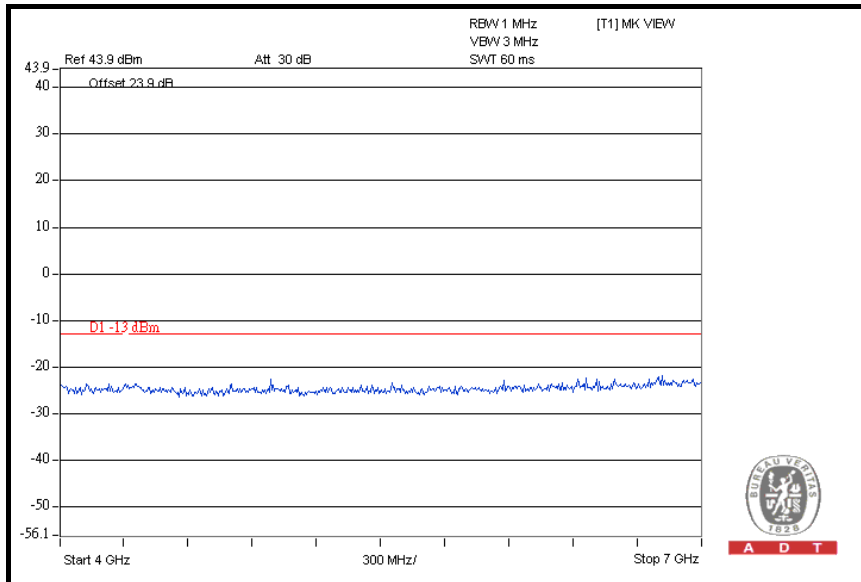


7GHz ~ 9GHz

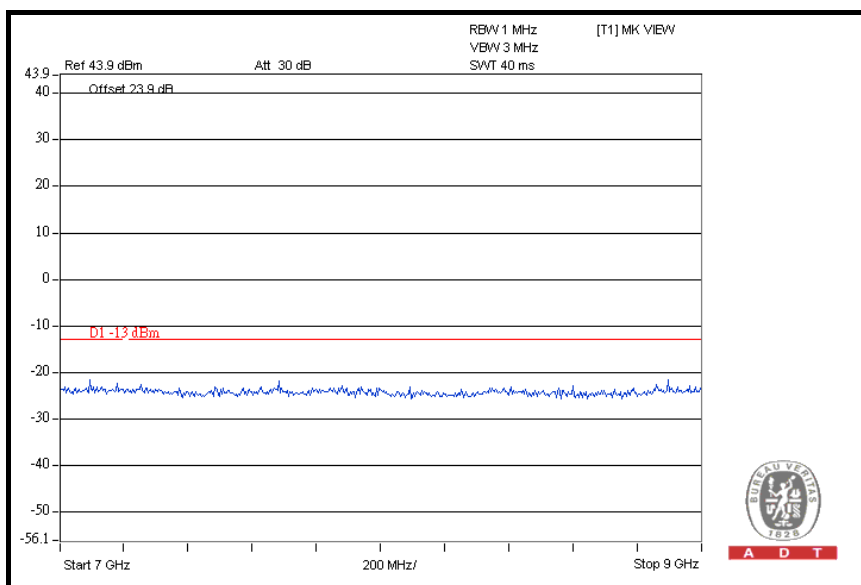


CH 4233: 9kHz ~ 1GHz

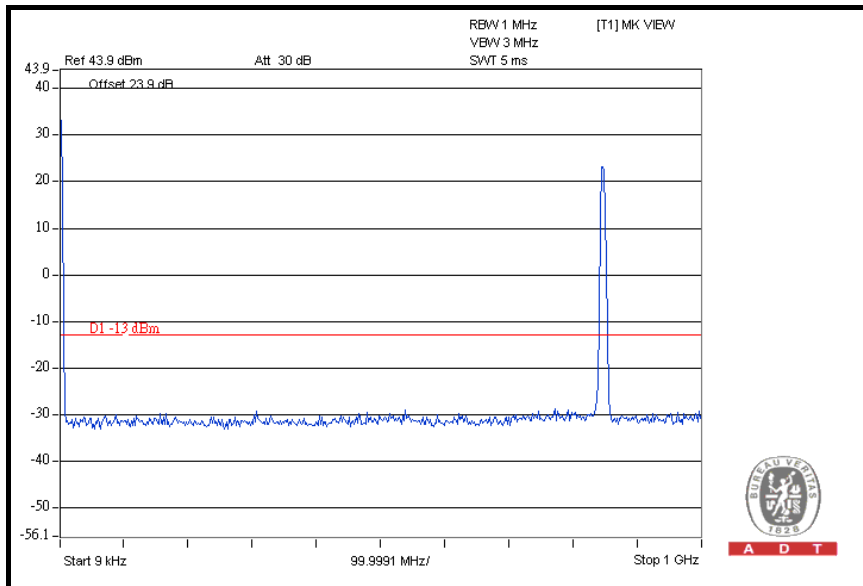


1GHz ~ 4GHz

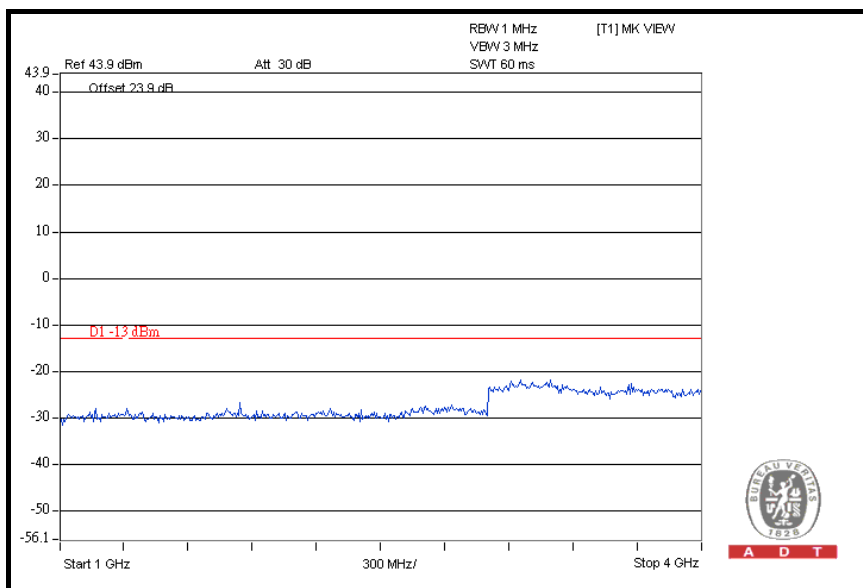

4GHz ~ 7GHz

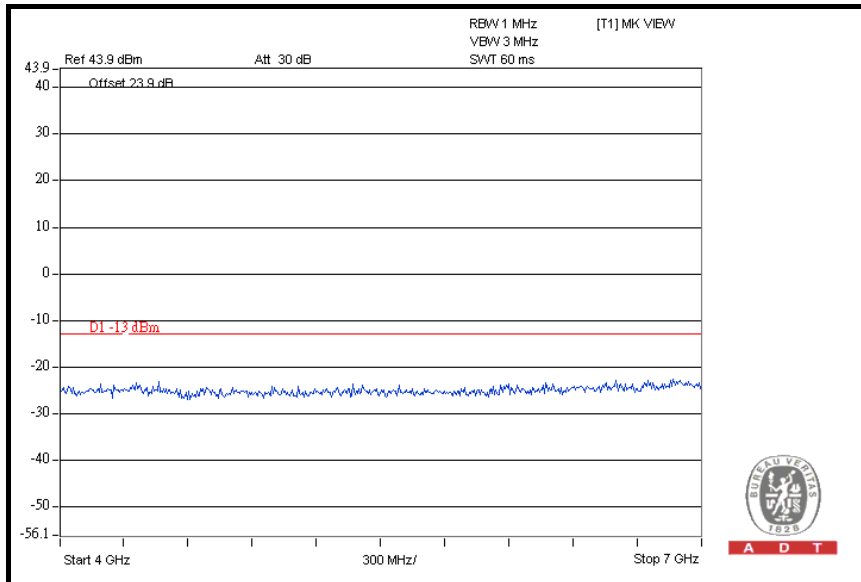

7GHz ~ 9GHz

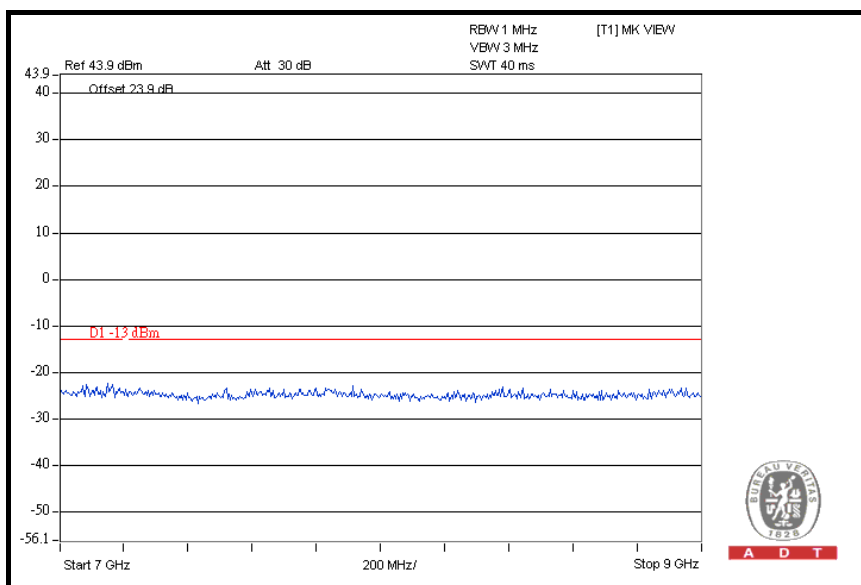

4.6 RADIATED EMISSION MEASUREMENT (BELOW 1GHz)

4.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT

In the FCC 24.238(a), On any frequency outside a licensee's frequency block within USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB. The emission limit equal to -13 dBm. So the limit of emission is the same absolute specified line.

| LIMIT (dBm) | EQUIVALENT FIELD STRENGTH AT 3m (dBuV/m) (NOTE) |
|-------------|---|
| -13 | 82.2 |

NOTE: The following formula is used to convert the equipment radiated power to field strength.

$$E = [1000000\sqrt{(30P)}] / 3 \text{ uV/m, where P is Watts.}$$

4.6.2 TEST INSTRUMENTS

Same as 4.1.2.

4.6.3 TEST PROCEDURES


- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE: The resolution bandwidth of spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 TEST SETUP

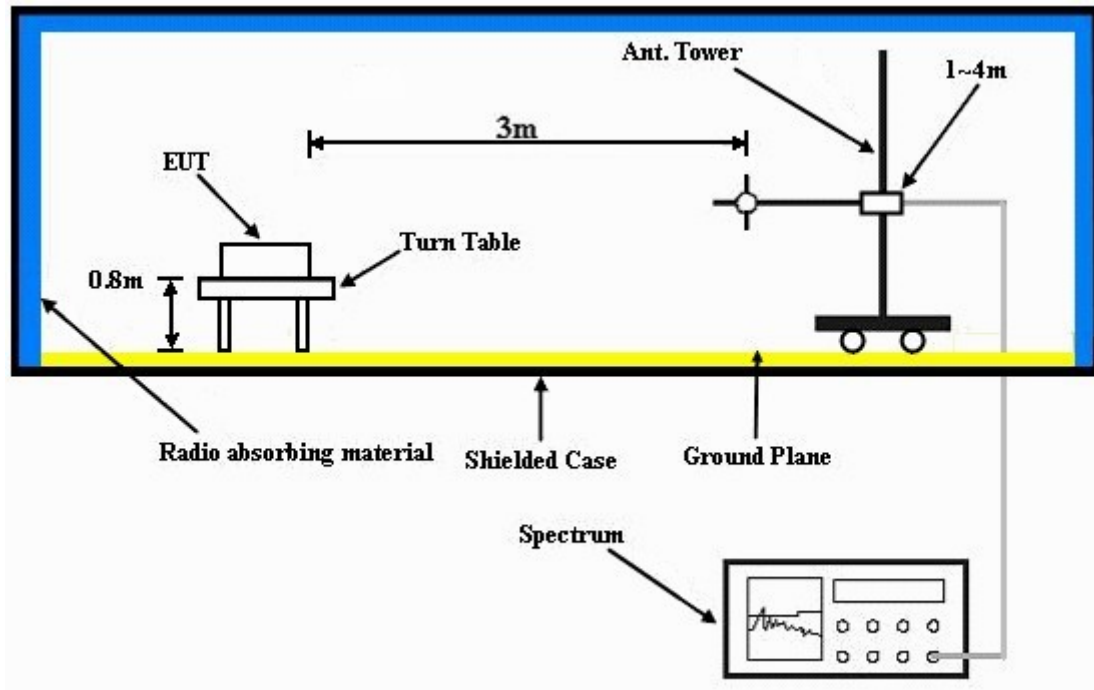

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.6.6 EUT OPERATING CONDITIONS

- The EUT makes a call to the communication simulator.
- The communication simulator station system controlled an EUT to export maximum output power under transmission mode and specific channel frequency.

4.6.7 TEST RESULTS

FOR GPRS:

| | | | |
|---------------------------------|-------------------------|------------------------|----------------|
| MODE | TX channel 251 | FREQUENCY RANGE | Below 1000 MHz |
| ENVIRONMENTAL CONDITIONS | 20deg. C, 60%RH, 991hPa | INPUT POWER | 120Vac, 60 Hz |
| TESTED BY | Kevin Liang | | |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 57.21 | 55.1 | 82.2 | -27.2 | 4.00 H | 343 | 41.6 | 13.5 |
| 2 | 358.52 | 53.2 | 82.2 | -29.1 | 1.25 H | 10 | 37.1 | 16.1 |
| 3 | 455.71 | 48.6 | 82.2 | -33.7 | 2.00 H | 199 | 29.9 | 18.7 |
| 4 | 630.66 | 47.7 | 82.2 | -34.6 | 1.25 H | 193 | 25.2 | 22.5 |
| 5 | 799.78 | 62.2 | 82.2 | -20.1 | 1.00 H | 10 | 37.6 | 24.6 |
| 6 | 889.20 | 53.2 | 82.2 | -29.1 | 3.00 H | 25 | 27.4 | 25.8 |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 57.21 | 65.3 | 82.2 | -17.0 | 1.00 V | 7 | 51.8 | 13.5 |
| 2 | 177.74 | 51.9 | 82.2 | -30.4 | 1.25 V | 280 | 39.4 | 12.5 |
| 3 | 335.19 | 48.5 | 82.2 | -33.8 | 1.50 V | 136 | 32.9 | 15.6 |
| 4 | 457.66 | 53.1 | 82.2 | -29.2 | 1.50 V | 259 | 34.4 | 18.7 |
| 5 | 628.72 | 46.7 | 82.2 | -35.6 | 1.00 V | 169 | 24.2 | 22.5 |
| 6 | 799.78 | 59.4 | 82.2 | -22.9 | 2.00 V | 241 | 34.8 | 24.6 |

NOTE:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. This is valid for all 3 channels.

FOR CDMA:

| | | | |
|---------------------------------|-------------------------|------------------------|---------------|
| MODE | TX channel 777 | FREQUENCY RANGE | Below 1000MHz |
| ENVIRONMENTAL CONDITIONS | 20deg. C, 60%RH, 991hPa | INPUT POWER | 120Vac, 60 Hz |
| TESTED BY | Kevin Liang | | |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|--|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 59.16 | 58.2 | 82.2 | -24.1 | 4.00 H | 235 | 45.0 | 13.2 |
| 2 | 317.70 | 52.2 | 82.2 | -30.1 | 3.00 H | 19 | 37.1 | 15.1 |
| 3 | 455.71 | 52.1 | 82.2 | -30.2 | 1.50 H | 295 | 33.4 | 18.7 |
| 4 | 630.66 | 47.9 | 82.2 | -34.4 | 1.25 H | 196 | 25.4 | 22.5 |
| 5 | 799.78 | 61.4 | 82.2 | -20.9 | 1.00 H | 10 | 36.8 | 24.6 |
| 6 | 898.92 | 50.8 | 82.2 | -31.5 | 2.00 H | 346 | 24.9 | 25.9 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 61.10 | 67.8 | 82.2 | -14.5 | 1.00 V | 244 | 54.8 | 13.0 |
| 2 | 451.82 | 57.3 | 82.2 | -25.0 | 1.25 V | 31 | 38.7 | 18.6 |
| 3 | 628.72 | 46.5 | 82.2 | -35.8 | 1.00 V | 166 | 24.0 | 22.5 |
| 4 | 797.84 | 55.4 | 82.2 | -26.9 | 2.00 V | 262 | 30.8 | 24.6 |
| 5 | 898.92 | 51.6 | 82.2 | -30.7 | 1.25 V | 346 | 25.7 | 25.9 |
| 6 | 930.02 | 52.6 | 82.2 | -29.7 | 1.00 V | 346 | 26.2 | 26.4 |

NOTE:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. This is valid for all 3 channels.



A D T

FOR WCDMA:

| | | | |
|---------------------------------|----------------------------|------------------------|----------------|
| MODE | TX channel 4233 | FREQUENCY RANGE | Below 1000 MHz |
| ENVIRONMENTAL CONDITIONS | 20deg. C, 60%RH, 991hPa | INPUT POWER | 120Vac, 60 Hz |
| TESTED BY | Kevin Liang | | |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|--|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 61.10 | 56.4 | 82.2 | -25.9 | 3.00 H | 238 | 43.4 | 13.0 |
| 2 | 134.97 | 53.4 | 82.2 | -28.9 | 1.25 H | 262 | 39.8 | 13.6 |
| 3 | 358.52 | 52.6 | 82.2 | -29.7 | 1.25 H | 10 | 36.5 | 16.1 |
| 4 | 453.77 | 56.0 | 82.2 | -26.3 | 2.00 H | 202 | 37.4 | 18.6 |
| 5 | 630.66 | 46.9 | 82.2 | -35.4 | 1.25 H | 199 | 24.4 | 22.5 |
| 6 | 797.84 | 59.9 | 82.2 | -22.4 | 1.00 H | 10 | 35.3 | 24.6 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 63.05 | 66.4 | 82.2 | -15.9 | 1.50 V | 253 | 53.6 | 12.8 |
| 2 | 354.63 | 49.3 | 82.2 | -33.0 | 1.25 V | 316 | 33.3 | 16.0 |
| 3 | 457.66 | 56.6 | 82.2 | -25.7 | 1.25 V | 250 | 37.9 | 18.7 |
| 4 | 630.66 | 46.3 | 82.2 | -36.0 | 1.00 V | 175 | 23.8 | 22.5 |
| 5 | 799.78 | 55.0 | 82.2 | -27.3 | 1.00 V | 241 | 30.4 | 24.6 |
| 6 | 900.86 | 51.2 | 82.2 | -31.1 | 1.00 V | 334 | 25.3 | 25.9 |

NOTE:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. This is valid for all 3 channels.

4.7 RADIATED EMISSION MEASUREMENT (ABOVE 1GHz)

4.7.1 LIMITS OF RADIATED EMISSION MEASUREMENT

In the FCC 22.917 (a), On any frequency outside a licensee's frequency block within GPRS spectrum, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB. The emission limit equal to -13dBm .

4.7.2 TEST INSTRUMENTS

Same as 4.1.2.

4.7.3 TEST PROCEDURES


- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to “Read Value “ of step a. Record the power level of S.G
- c. $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn.}$
- d. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, $E.R.P \text{ power} = E.I.P.R \text{ power} - 2.15\text{dBi.}$

NOTE: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.

4.7.4 DEVIATION FROM TEST STANDARD

No deviation

4.7.5 TEST SETUP

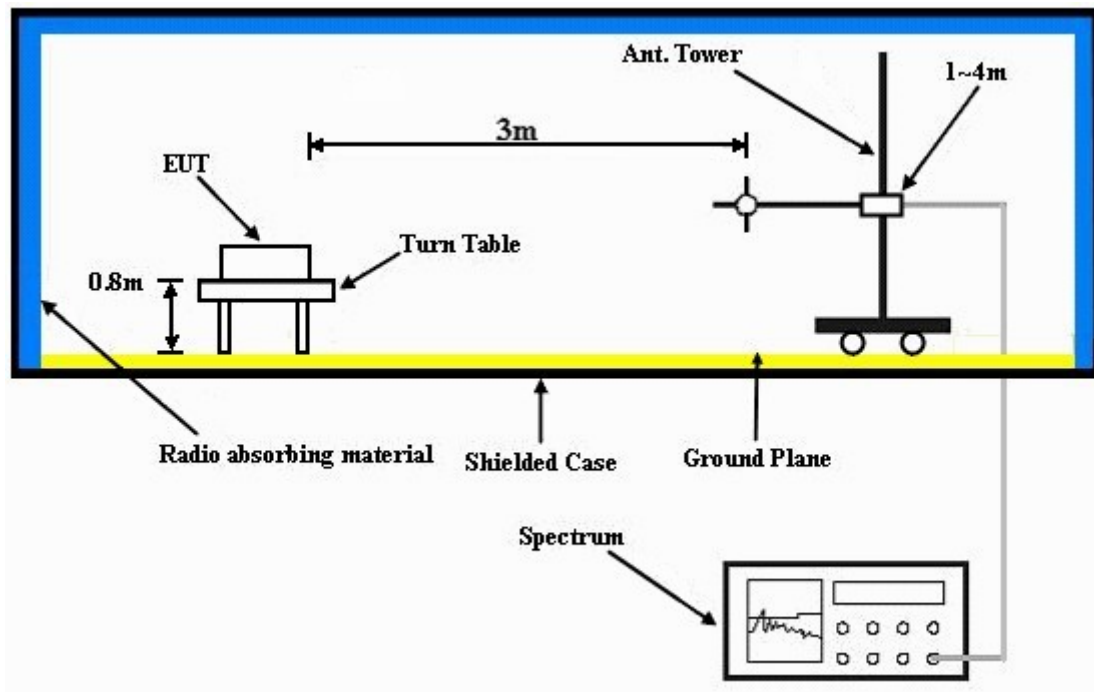

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.7.6 EUT OPERATING CONDITIONS

- a. The EUT makes a call to the communication simulator.
- b. The communication simulator station system controlled an EUT to export maximum output power under transmission mode and specific channel frequency.

4.7.7 TEST RESULTS

FOR GPRS BAND:

| | | | |
|--------------------|----------------|---------------------------------|-------------------------|
| MODE | TX channel 128 | FREQUENCY RANGE | Above 1000 MHz |
| INPUT POWER | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 23deg. C, 63%RH, 991hPa |
| TESTED BY | Mark Liao | | |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | |
|---|-------------|-----------------------|-------------|-----------------------|------------------------|-------------------|
| No. | Freq. (MHz) | Emission Level (dBuV) | Limit (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | Power Value (dBm) |
| 1 | 1648.4 | 54.6 | -13.0 | -47.5 | 7.6 | -39.9 |
| 2 | 2472.6 | 67.1 | -13.0 | -35.8 | 8.4 | -27.4 |
| 3 | 3296.8 | 52.1 | -13.0 | -52.6 | 9.9 | -42.7 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | |
| No. | Freq. (MHz) | Emission Level (dBuV) | Limit (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | Power Value (dBm) |
| 1 | 1648.4 | 55.0 | -13.0 | -47.3 | 7.6 | -39.7 |
| 2 | 2472.6 | 61.8 | -13.0 | -41.0 | 8.4 | -32.6 |
| 3 | 3296.8 | 53.4 | -13.0 | -50.7 | 9.9 | -40.8 |

NOTE: Power Value (dBum) = S.G Power Value (dBm) + Correction Factor (dB).

| | | | |
|--------------------|----------------|---------------------------------|-------------------------|
| MODE | TX channel 190 | FREQUENCY RANGE | Above 1000 MHz |
| INPUT POWER | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 23deg. C, 63%RH, 991hPa |
| TESTED BY | Mark Liao | | |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | |
|--|-------------|-----------------------|-------------|-----------------------|------------------------|-------------------|
| No. | Freq. (MHz) | Emission Level (dBuV) | Limit (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | Power Value (dBm) |
| 1 | 1673.2 | 60.3 | -13.0 | -42.2 | 7.7 | -34.5 |
| 2 | 2509.8 | 68.8 | -13.0 | -34.3 | 8.4 | -25.9 |
| 3 | 3346.4 | 48.7 | -13.0 | -56.0 | 9.9 | -46.1 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | |
| No. | Freq. (MHz) | Emission Level (dBuV) | Limit (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | Power Value (dBm) |
| 1 | 1673.2 | 56.9 | -13.0 | -45.0 | 7.7 | -37.3 |
| 2 | 2509.8 | 62.8 | -13.0 | -40.2 | 8.4 | -31.8 |
| 3 | 3346.4 | 50.7 | -13.0 | -53.6 | 9.9 | -43.7 |

NOTE: Power Value (dBum) = S.G Power Value (dBm) + Correction Factor (dB).



A D T

| | | | |
|--------------------|----------------|---------------------------------|-------------------------|
| MODE | TX channel 251 | FREQUENCY RANGE | Above 1000 MHz |
| INPUT POWER | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 23deg. C, 63%RH, 991hPa |
| TESTED BY | Mark Liao | | |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | |
|--|-------------|-----------------------|-------------|-----------------------|------------------------|-------------------|
| No. | Freq. (MHz) | Emission Level (dBuV) | Limit (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | Power Value (dBm) |
| 1 | 1697.6 | 54.7 | -13.0 | -48.2 | 7.9 | -40.3 |
| 2 | 2546.4 | 67.0 | -13.0 | -36.4 | 8.5 | -27.9 |
| 3 | 3395.2 | 50.8 | -13.0 | -54.0 | 9.9 | -44.1 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | |
| No. | Freq. (MHz) | Emission Level (dBuV) | Limit (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | Power Value (dBm) |
| 1 | 1697.6 | 57.8 | -13.0 | -44.4 | 7.9 | -36.5 |
| 2 | 2546.4 | 61.8 | -13.0 | -41.2 | 8.5 | -32.7 |
| 3 | 3395.2 | 52.0 | -13.0 | -52.3 | 9.9 | -42.4 |

NOTE: Power Value (dBum) = S.G Power Value (dBm) + Correction Factor (dB).



A D T

FOR CDMA BAND:

| | | | |
|--------------------|---------------|---------------------------------|-------------------------|
| MODE | Channel 1013 | FREQUENCY RANGE | Above 1000MHz |
| INPUT POWER | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 23deg. C, 63%RH, 991hPa |
| TESTED BY | Mark Liao | | |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 m | | | | | | |
|--|-------------|-----------------------|-------------|-----------------------|------------------------|-------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV) | LIMIT (dBm) | S.G POWER VALUE (dBm) | CORRECTION FACTOR (dB) | POWER VALUE (dBm) |
| 1 | 1649.4 | 44.7 | -13.0 | -57.3 | 7.6 | -49.7 |
| 2 | 2474.1 | 44.3 | -13.0 | -58.2 | 8.4 | -49.8 |
| 3 | 3298.8 | 48.0 | -13.0 | -55.9 | 9.9 | -46.0 |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 m | | | | | | |
|--|-------------|-----------------------|-------------|-----------------------|------------------------|-------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV) | LIMIT (dBm) | S.G POWER VALUE (dBm) | CORRECTION FACTOR (dB) | POWER VALUE (dBm) |
| 1 | 1649.4 | 45.8 | -13.0 | -56.5 | 7.6 | -48.9 |
| 2 | 2474.1 | 42.8 | -13.0 | -60.8 | 8.4 | -52.4 |
| 3 | 3298.8 | 49.1 | -13.0 | -55.7 | 9.9 | -45.8 |

NOTE: Power Value (dBum) = S.G Power Value (dBm) + Correction Factor (dB).

| | | | |
|--------------------|---------------|---------------------------------|----------------------------|
| MODE | Channel 384 | FREQUENCY RANGE | Above 1000MHz |
| INPUT POWER | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 23deg. C, 63%RH, 991hPa |
| TESTED BY | Mark Liao | | |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 m | | | | | | |
|---|-------------|-----------------------|-------------|-----------------------|------------------------|-------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV) | LIMIT (dBm) | S.G POWER VALUE (dBm) | CORRECTION FACTOR (dB) | POWER VALUE (dBm) |
| 1 | 1673.04 | 44.1 | -13.0 | -57.5 | 7.7 | -49.8 |
| 2 | 2509.56 | 43.8 | -13.0 | -58.8 | 8.4 | -50.4 |
| 3 | 3346.08 | 48.7 | -13.0 | -56.1 | 9.9 | -46.2 |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 m | | | | | | |
|---|-------------|-----------------------|-------------|-----------------------|------------------------|-------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV) | LIMIT (dBm) | S.G POWER VALUE (dBm) | CORRECTION FACTOR (dB) | POWER VALUE (dBm) |
| 1 | 1673.04 | 47.7 | -13.0 | -55.1 | 7.7 | -47.4 |
| 2 | 2509.56 | 42.1 | -13.0 | -60.6 | 8.4 | -52.2 |
| 3 | 3346.08 | 48.1 | -13.0 | -56.8 | 9.9 | -46.9 |

NOTE: Power Value (dBum) = S.G Power Value (dBm) + Correction Factor (dB).

| | | | |
|--------------------|---------------|---------------------------------|----------------------------|
| MODE | Channel 777 | FREQUENCY RANGE | Above 1000MHz |
| INPUT POWER | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 23deg. C, 63%RH, 991hPa |
| TESTED BY | Mark Liao | | |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 m | | | | | | |
|---|-------------|-----------------------|-------------|-----------------------|------------------------|-------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV) | LIMIT (dBm) | S.G POWER VALUE (dBm) | CORRECTION FACTOR (dB) | POWER VALUE (dBm) |
| 1 | 1696.62 | 48.8 | -13.0 | -53.4 | 7.9 | -45.5 |
| 2 | 2544.93 | 42.6 | -13.0 | -60.6 | 8.5 | -52.1 |
| 3 | 3393.24 | 48.5 | -13.0 | -56.2 | 9.9 | -46.3 |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 m | | | | | | |
|---|-------------|-----------------------|-------------|-----------------------|------------------------|-------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV) | LIMIT (dBm) | S.G POWER VALUE (dBm) | CORRECTION FACTOR (dB) | POWER VALUE (dBm) |
| 1 | 1696.62 | 49.5 | -13.0 | -52.8 | 7.9 | -44.9 |
| 2 | 2544.93 | 41.3 | -13.0 | -61.9 | 8.5 | -53.4 |
| 3 | 3393.24 | 48.4 | -13.0 | -55.7 | 9.9 | -45.8 |

NOTE: Power Value (dBum) = S.G Power Value (dBm) + Correction Factor (dB).

FOR WCDMA BAND:

| | | | |
|--------------------|-----------------|---------------------------------|-------------------------|
| MODE | TX channel 4132 | FREQUENCY RANGE | Above 1000 MHz |
| INPUT POWER | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 23deg. C, 63%RH, 991hPa |
| TESTED BY | Mark Liao | | |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | |
|--|-------------|-----------------------|-------------|-----------------------|------------------------|-------------------|
| No. | Freq. (MHz) | Emission Level (dBuV) | Limit (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | Power Value (dBm) |
| 1 | 1652.8 | 42.2 | -13.0 | -60.3 | 7.6 | -52.7 |
| 2 | 2479.2 | 39.8 | -13.0 | -62.7 | 8.4 | -54.3 |
| 3 | 3305.6 | 46.8 | -13.0 | -57.5 | 9.9 | -47.6 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | |
| No. | Freq. (MHz) | Emission Level (dBuV) | Limit (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | Power Value (dBm) |
| 1 | 1652.8 | 44.8 | -13.0 | -57.2 | 7.6 | -49.6 |
| 2 | 2479.2 | 40.8 | -13.0 | -61.9 | 8.4 | -53.5 |
| 3 | 3305.6 | 46.6 | -13.0 | -57.3 | 9.9 | -47.4 |

NOTE: Power Value (dBum) = S.G Power Value (dBm) + Correction Factor (dB).



A D T

| | | | |
|--------------------|-----------------|---------------------------------|-------------------------|
| MODE | TX channel 4182 | FREQUENCY RANGE | Above 1000 MHz |
| INPUT POWER | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 23deg. C, 63%RH, 991hPa |
| TESTED BY | Mark Liao | | |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | |
|--|-------------|-----------------------|-------------|-----------------------|------------------------|-------------------|
| No. | Freq. (MHz) | Emission Level (dBuV) | Limit (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | Power Value (dBm) |
| 1 | 1672.8 | 44.3 | -13.0 | -58.1 | 7.7 | -50.4 |
| 2 | 2509.2 | 40.3 | -13.0 | -63.2 | 8.4 | -54.8 |
| 3 | 3345.6 | 46.0 | -13.0 | -58.3 | 9.9 | -48.4 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | |
| No. | Freq. (MHz) | Emission Level (dBuV) | Limit (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | Power Value (dBm) |
| 1 | 1672.8 | 45.3 | -13.0 | -56.9 | 7.7 | -49.2 |
| 2 | 2509.2 | 39.6 | -13.0 | -63.4 | 8.4 | -55.0 |
| 3 | 3345.6 | 46.1 | -13.0 | -58.6 | 9.9 | -48.7 |

NOTE: Power Value (dBum) = S.G Power Value (dBm) + Correction Factor (dB).

| | | | |
|--------------------|-----------------|---------------------------------|-------------------------|
| MODE | TX channel 4233 | FREQUENCY RANGE | Above 1000 MHz |
| INPUT POWER | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 23deg. C, 63%RH, 991hPa |
| TESTED BY | Mark Liao | | |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | |
|--|-------------|-----------------------|-------------|-----------------------|------------------------|-------------------|
| No. | Freq. (MHz) | Emission Level (dBuV) | Limit (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | Power Value (dBm) |
| 1 | 1693.2 | 42.5 | -13.0 | -59.7 | 7.9 | -51.8 |
| 2 | 2539.8 | 40.2 | -13.0 | -62.6 | 8.5 | -54.1 |
| 3 | 3386.4 | 46.5 | -13.0 | -58.1 | 9.9 | -48.2 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | |
| No. | Freq. (MHz) | Emission Level (dBuV) | Limit (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | Power Value (dBm) |
| 1 | 1693.2 | 45.0 | -13.0 | -57.9 | 7.9 | -50.0 |
| 2 | 2539.8 | 41.2 | -13.0 | -61.5 | 8.5 | -53.0 |
| 3 | 3386.4 | 46.8 | -13.0 | -57.6 | 9.9 | -47.7 |

NOTE: Power Value (dBum) = S.G Power Value (dBm) + Correction Factor (dB).

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



6 INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml.
If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:
Tel: 886-2-26052180
Fax: 886-2-26051924

Hsin Chu EMC/RF Lab:
Tel: 886-3-5935343
Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:
Tel: 886-3-3183232
Fax: 886-3-3185050

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.

7 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---