

Antenna test report


Project model: T2

ShenZhen City FeiMin Technology CO.,LTD


ANTENNA SPECIFICATION

Project Information


Appearance and Dimensions

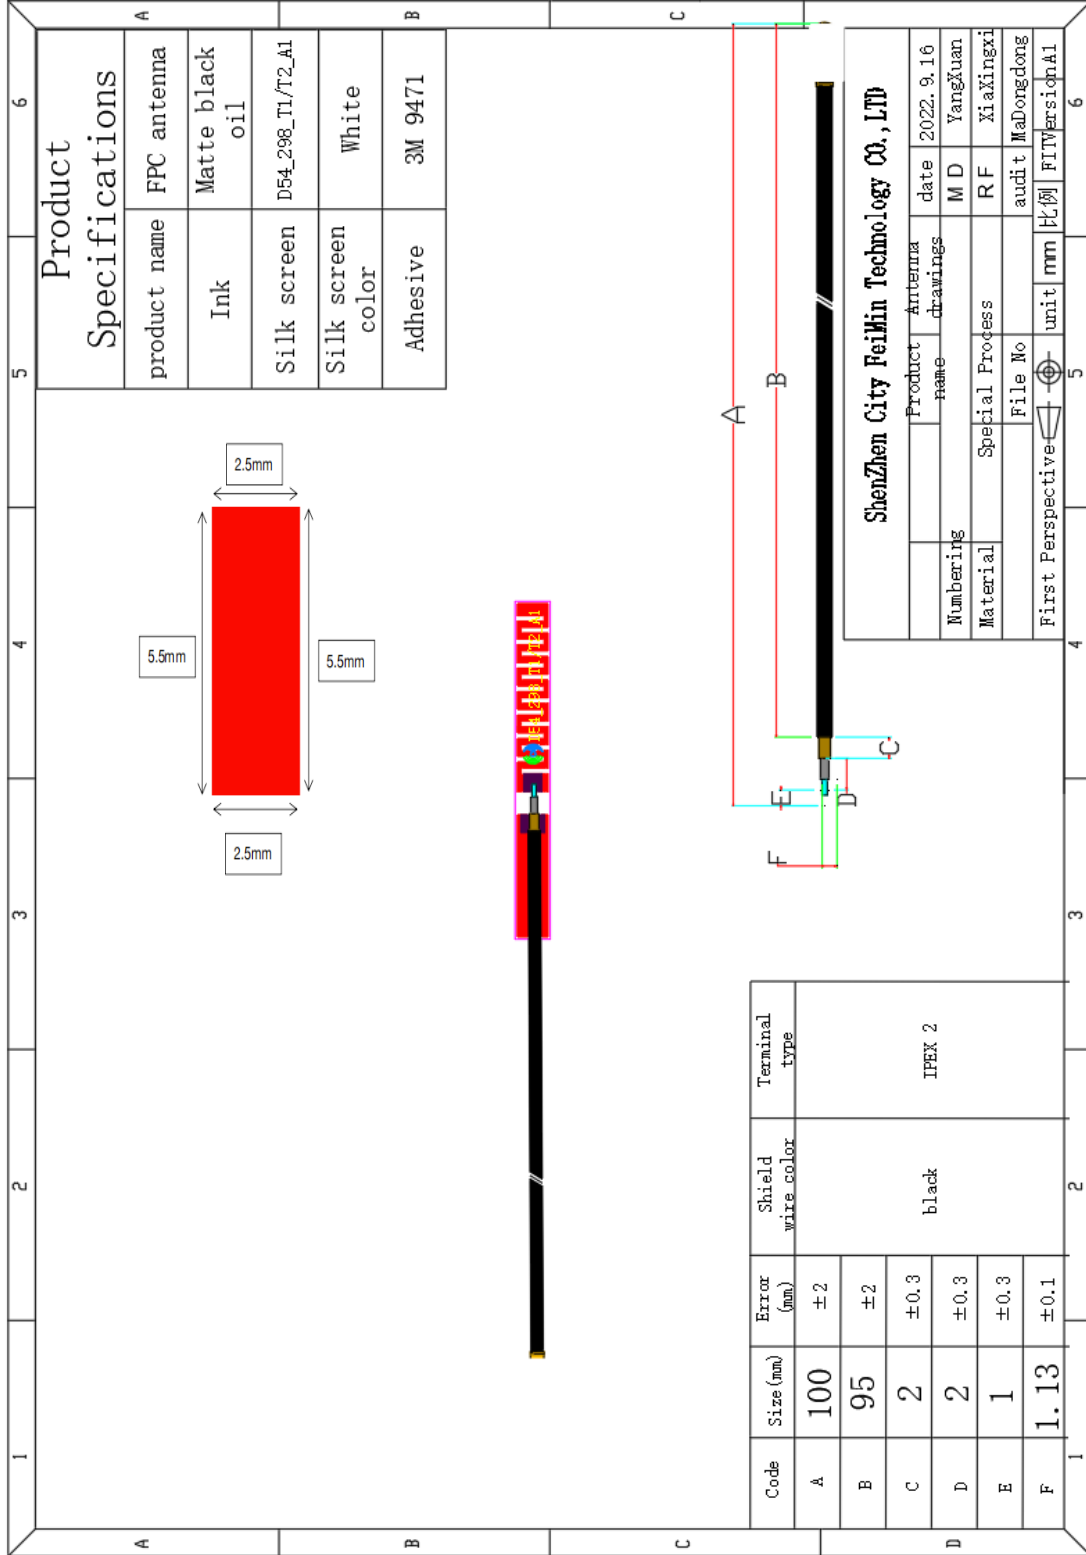

Test equipment and test environment

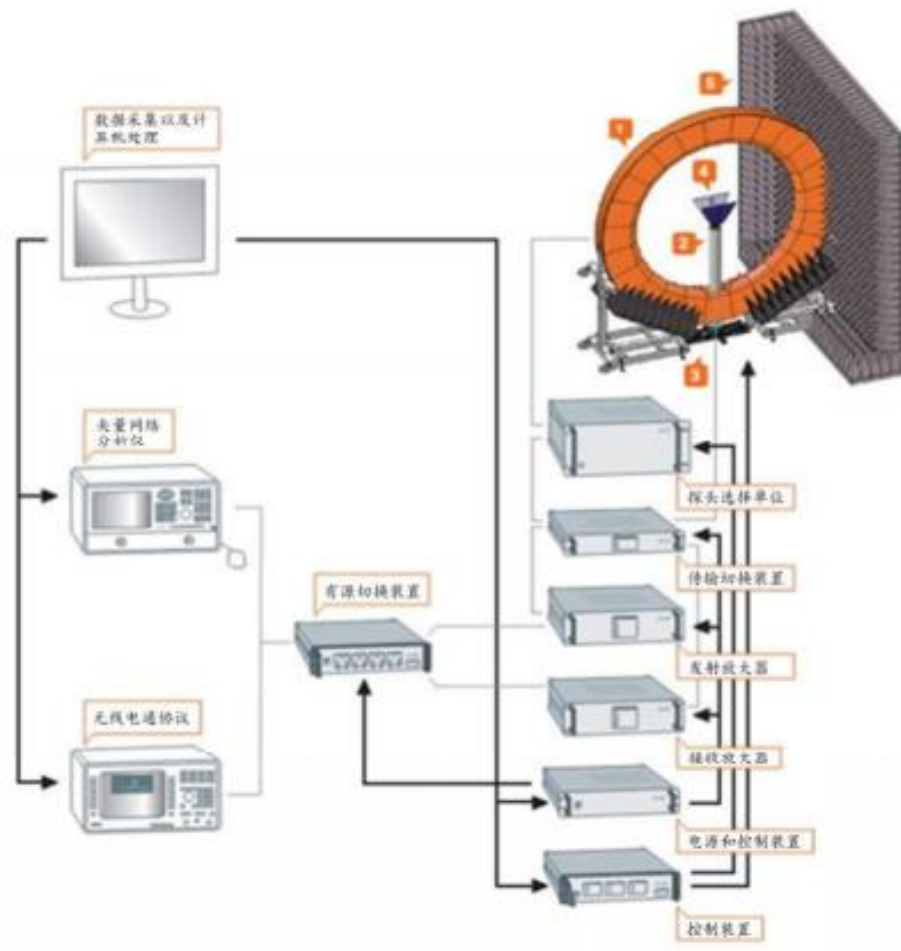

Test equipment

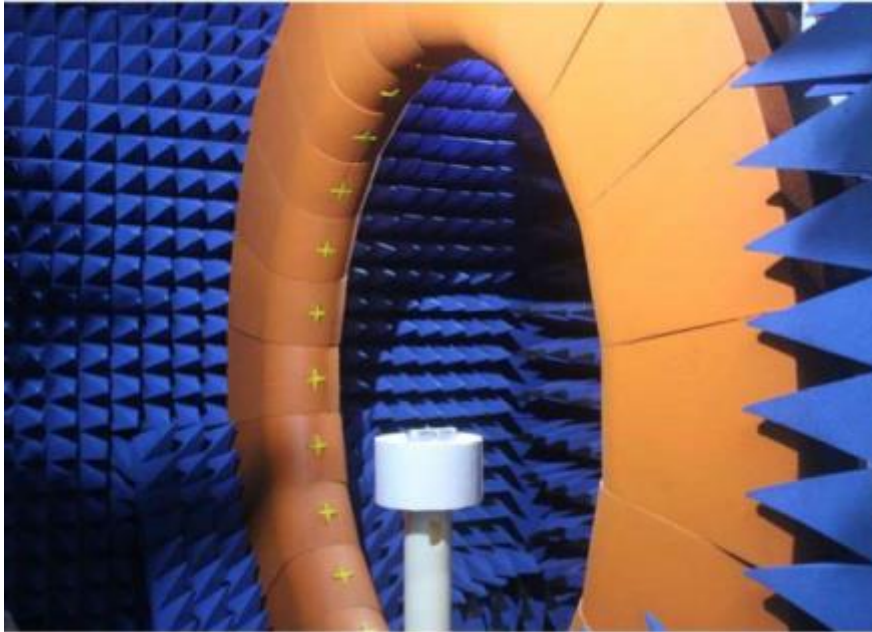

Anechoic chamber

The main test indicators:

Passive indicators

Gain

Efficiency

3D pattern


Active index

Total Radiated Power

Total receiving sensitivity

Frequency: 0.4GHz~6GHz

Test equipment

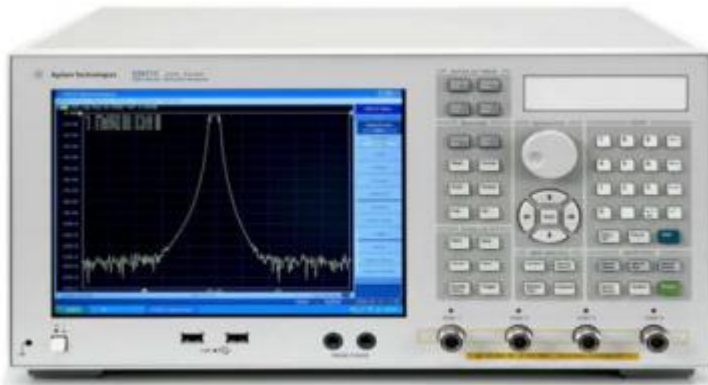

Vector Network Analyzer Agilent E5071C

Frequency: 300 kHz~8.5GHz




Wideband Wireless Communication Tester R&S CMW500

GSM/3G/4G


WIFI/ Bluetooth

NB-IoT


Test photos

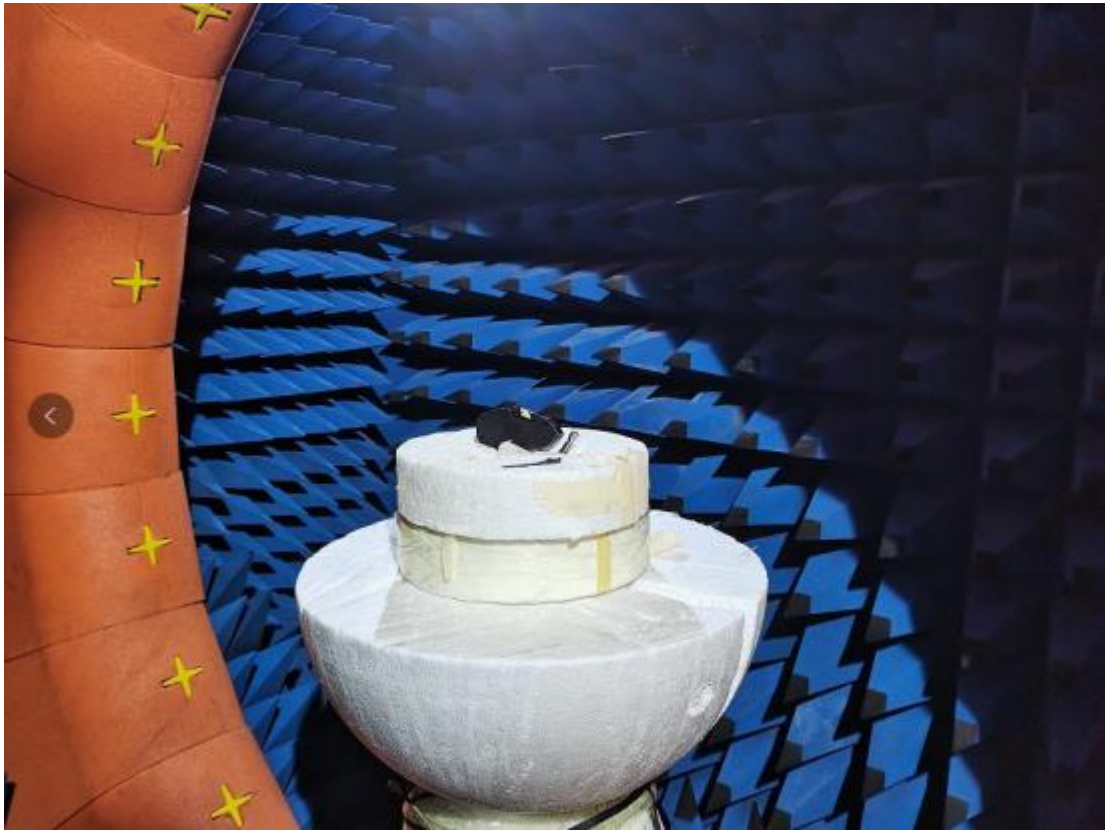

Antenna SWR




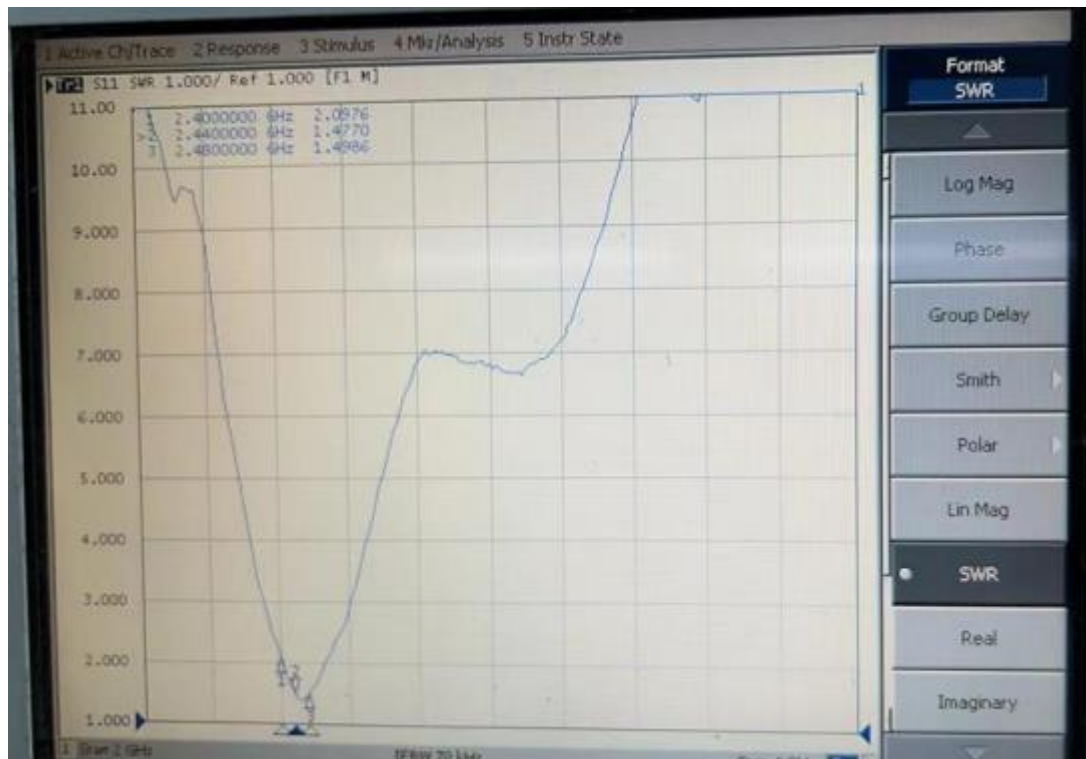


Antenna Return loss

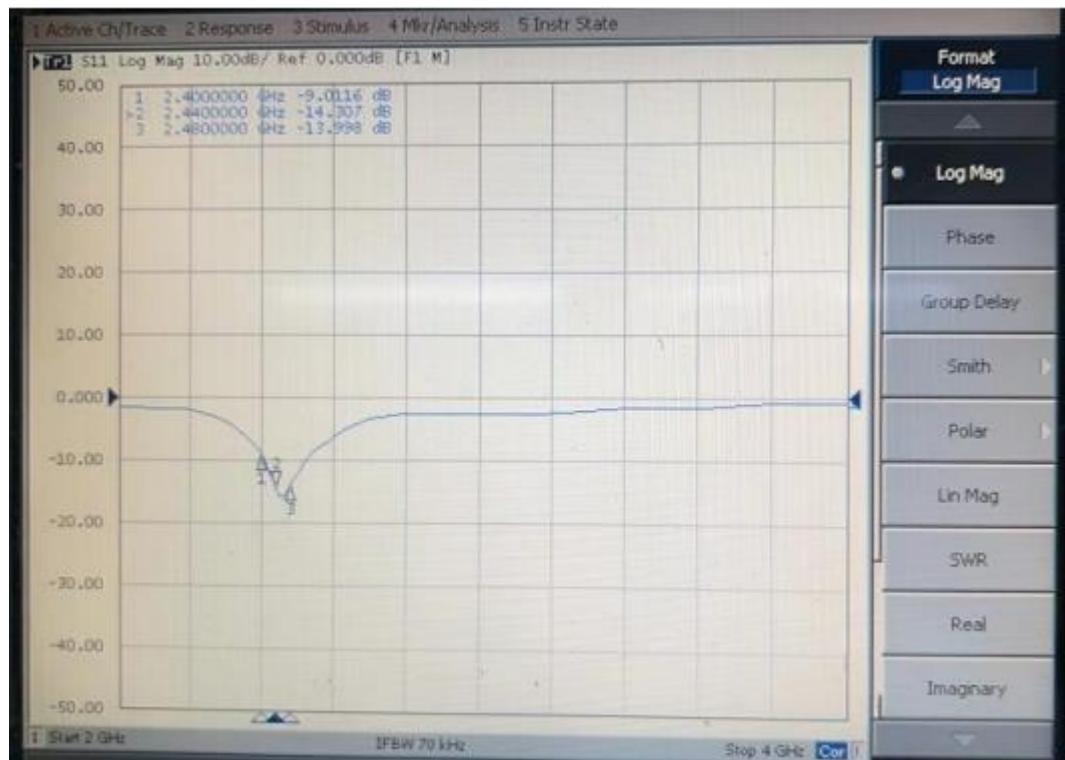

Antenna gain and efficiency

天线		
Freq(MHz)	Efficiency (%)	Gian(dBi)
2400	42.59	1.99
2410	41.86	1.8
2420	44.06	2.24
2430	43.67	2.18
2440	43.57	2.28
2450	43.38	2.12
2460	42.68	2.07
2470	43.46	2.16
2480	42.96	2.21
2490	44.57	2.51
2500	45.27	2.55

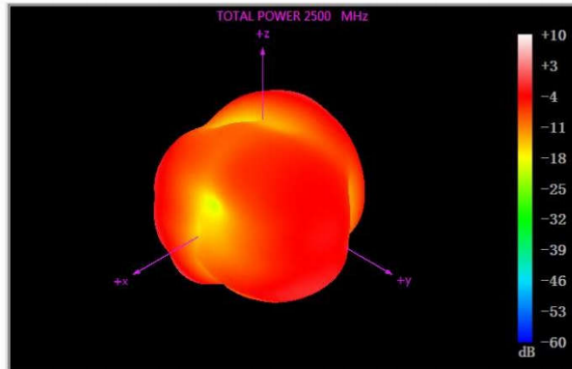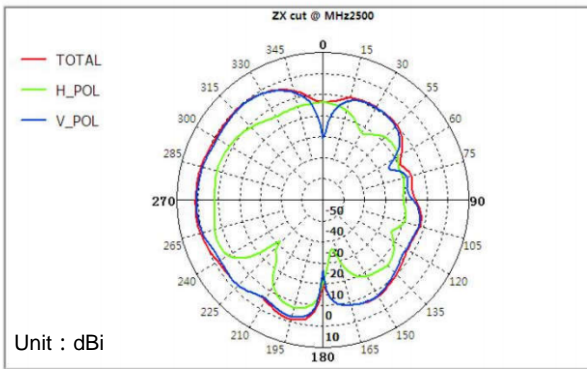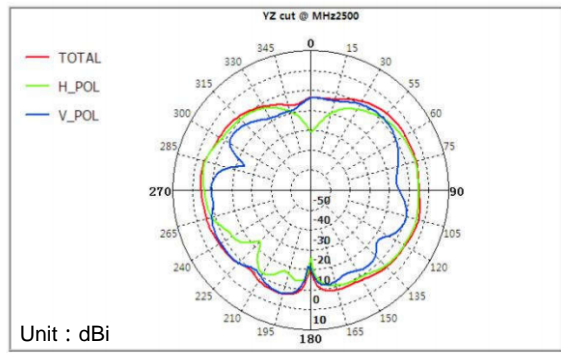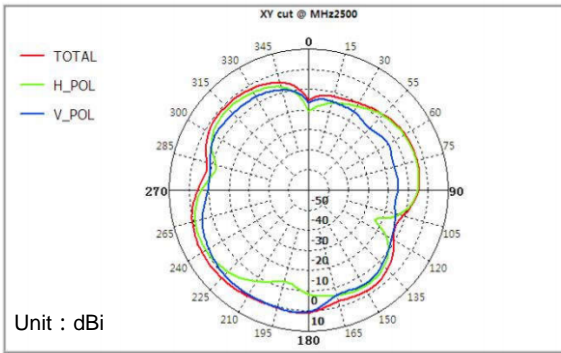

Antenna Radiation Pattern

