

EMI TEST REPORT

On Model Name: ATA

Model Number: HT701

Brand Name: Grandstream

Prepared for Grandstream Networks, INC

FCC ID Number: YZZHT701V21

According to FCC 47 CFR Part 15, Subpart B

Test Report #: SHE-1309-11061-FCC

Tested by: Daomen Galanz
Daomen /Engineer Company Name

Reviewed by: Jawen Yin ECMG
Jawen Yin/ Senior Engineer Company Name

QC Manager: Swall Zhang ECMG
Swall Zhang/QC Manager Company Name

Test Report Released by: Swall Zhang September 27th, 2013
Swall Zhang Date

Test Location

Tests performed in a Certified ANSI Semi-Anechoic Chamber and Shielded Room.

*Test Site Location : Galanz
25 South Ronggui Rd., Shunde,
Foshan, Guangdong, China*

Tel : (86)-757-23612785

Fax : (86)-757-23612537

Test Facility

The test facility was recognized, certified, or accredited by the following organizations:

- *CNAL – LAB Code: L2244
Galanz EMC Laboratory has been assessed and in compliance with CNAL/AC01:2002 accreditation criteria for testing laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of Testing Laboratories.*
- *FCC – Registration No.: 580210
Galanz EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC was maintained in our files.*

Table of Contents

<i>GOVERNMENT DISCLAIMER NOTICE</i>	2
<i>REPRODUCTION CLAUSE</i>	2
<i>OPINIONS AND INTERPRETATIONS</i>	2
<i>STATEMENT OF MEASUREMENT UNCERTAINTY</i>	2
<i>ADMINISTRATIVE DATA</i>	3
<i>EUT DESCRIPTION</i>	4
<i>TEST SUMMARY</i>	5
<i>EUT OPERATION</i>	6
<i>EUT EXERCISE SOFTWARE</i>	6
<i>EQUIPMENT MODIFICATION</i>	6
<i>EUT SAMPLE PHOTOS FOR MODEL HT701</i>	7
<i>TEST SYSTEM DETAILS</i>	12
<i>ATTACHMENT 1 - CONDUCTED EMISSION TEST RESULTS</i>	15
<i>ATTACHMENT 2 - RADIATED EMISSION MEASUREMENT</i>	22

List Attached Files

<i>Exhibit Type</i>	<i>File Description</i>	<i>File Name</i>
<i>Test Report</i>	<i>Test Report</i>	<i>YZZHT701V21 _Test report.pdf</i>
<i>Operation Description</i>	<i>Technical Description</i>	<i>YZZHT701V21_operation description.pdf</i>
<i>External Photos</i>	<i>External Photos</i>	<i>YZZHT701V21_External Photos</i>
<i>Internal Photos</i>	<i>Internal Photos</i>	<i>YZZHT701V21_Internal Photos</i>
<i>Block Diagram</i>	<i>Block Diagram</i>	<i>YZZHT701V21_Block Diagram.pdf</i>
<i>Schematics</i>	<i>Circuit Diagram</i>	<i>YZZHT701V21_Schematics.pdf</i>
<i>ID Label/Location</i>	<i>Label and Location</i>	<i>YZZHT701V21 _Label & Location.pdf</i>
<i>User Manual</i>	<i>User Manual</i>	<i>YZZHT701V21 _User Manual.pdf</i>
<i>Test set-up photos</i>	<i>Test set-up photos</i>	<i>YZZHT701V21_Test Set-up Photos</i>

Government Disclaimer Notice

When government drawing, specification, or other data are used for any purpose other than in connection with a definitely related government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawing, specifications, or other data, is not to be regarded by implication or otherwise in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell patented invention that may in any way be related thereto. This report must not be used to claim product endorsement by NVLAP or any agency of the U.S. Government.

Reproduction Clause

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from ECMG Electronic Technical Testing Corp (Shenzhen).

Opinions and Interpretations

This test report relates to the abovementioned equipment under test (EUT). Without the permission of ECMG Electronic Technical Testing Corp (Shenzhen) Test Lab this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark on this or similar products. The manufacturer has sole responsibility of continued compliance of the device.

Statement of Measurement Uncertainty

The data and results referenced in the document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities that can account for a nominal measurement error. Furthermore, component and process variability of devices similar to that tested may result in additional deviation.

Administrative Data

Test Sample : ATA

Model Numbers : HT701

Model Tested : HT701

Date Of Receipt : September 18th, 2013

Date Tested : September 24th, 2013

Applicant : Grandstream Networks, INC

Address : 5F, Bldg #1, No.2 Kefa Rd., Science & Technology Park, Shenzhen, China

Telephone : (86)-755-26014600

Fax : (86)-755-26014601

Manufacturer : Grandstream Networks, INC

Address : 5F, Bldg #1, No.2 Kefa Rd., Science & Technology Park, Shenzhen, China

Telephone : (86)-755-26014600

Fax : (86)-755-26014601

Factory : Grandstream Networks, INC

Address : 5F, Bldg #1, No.2 Kefa Rd., Science & Technology Park, Shenzhen, China

Telephone : (86)-755-26014600

Fax : (86)-755-26014601

EUT Description

Grandstream Networks, INC., model tested HT701 (referred to as the EUT in this report) is an ATA.

Technical specifications of the EUT are as below:

Parameter		Range
Basic parameters	Rated voltage	12VDC
	Rated Current	0.5A
I/O Ports	Power Cable	Power adapter connection
	Internet Port (RJ-45)	Connect to the internal LAN network or router.
	FXS Port (RJ-11)	FXS port: to be connected to analog phones / fax machines.
	RESET	Factory Reset button. Press for 7 seconds to reset factory default settings.
Power Adapter #1	Input	100-240VAC 50/60Hz 0.18A
	Output	12VDC,0.5A
	Model	SDF1200050A1BB
	Brand name	Mass
Power Adapter #2	Input	100-240VAC 50/60Hz 0.2A
	Output	12VDC,0.5A
	Model	UE06L8-120050SPAU
	Brand name	UE
Power Adapter #3	Input	100-240VAC 50/60Hz 0.15A
	Output	12VDC,0.5A,
	Model	WCF1200050A1BA
	Brand name	Mass Power

For more detailed informations or features please refer to user's manual of EUT.

Test Summary

The Electromagnetic Compatibility requirements on model HT701 for this test are stated below. All results listed in this report relate exclusively to this above-mentioned model as the Equipment under Test. This report confers no approval or endorsement upon any other component, host or subsystem used in the test set-up.

Emission Tests				
Specifications	Description	Test Results	Test Point	Remark
<i>FCC Part 15.107 ANSI C63.4 -2003</i>	<i>Conducted Emission</i>	<i>Passed</i>	<i>AC Input Port</i>	<i>Attachment 1</i>
<i>FCC Part 15.109 ANSI C63.4 -2003</i>	<i>Radiated Emission</i>	<i>Passed</i>	<i>Enclosure</i>	<i>Attachment 2</i>

EUT Operation

The EUT was tested in as normal use status.

EUT Exercise Software

No test software support this test.

Equipment Modification

Any modifications installed previous to testing by Grandstream Networks, INC. will be incorporated in each production model sold or leased in United States.

There were no modifications installed by ECMG Electronic Technical Testing Corp (Shenzhen). Test personnel.

EUT Sample Photos for model HT701



EUT- Top View



EUT- Bottom View



I/O Ports view



Power Adapter #1(Mass power) view



Power Adapter 2(UE power) view




Power Adaptor #3 (Mass Power) View



EUT-Uncovered View



Main board- Top View

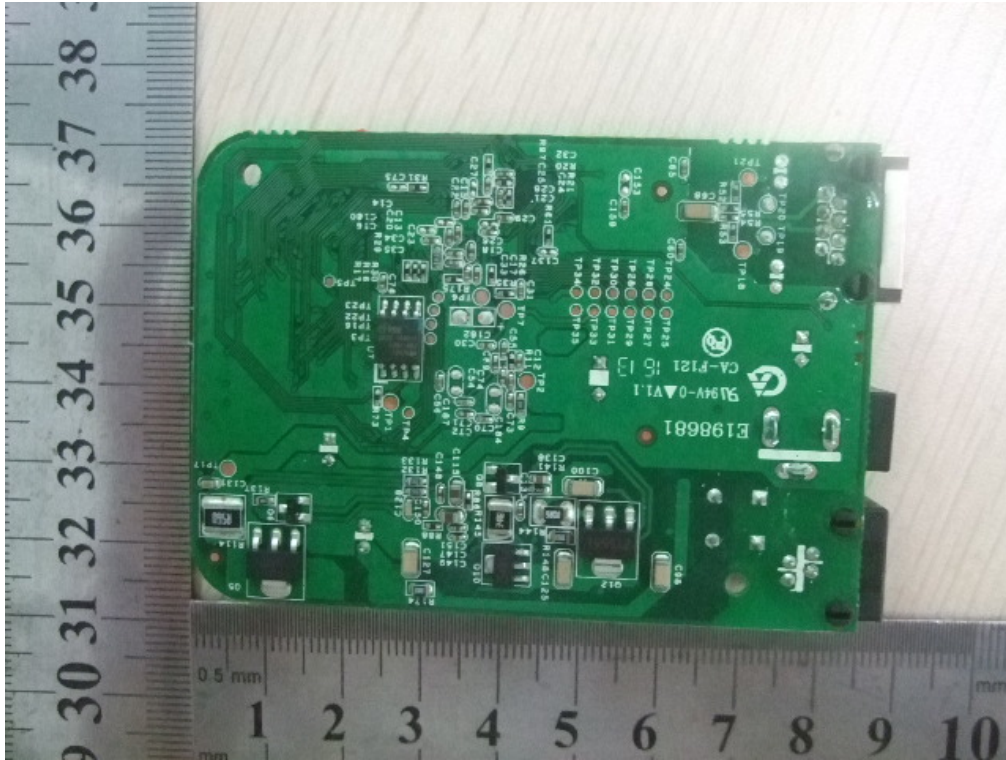

Main board- Bottom View

Test System Details


<i>EUT</i>			
Model Number:	HT701		
Model Tested:	HT701		
Description:	ATA		
Input:	AC 120V/60Hz		
Manufacturer:	Grandstream Networks, INC		
<i>Support Equipment</i>			
<i>Description</i>	<i>Model Number</i>	<i>Serial Number</i>	<i>Manufacturer</i>
<i>Notebook PC</i>	<i>ThinkPad X121e</i>	---	<i>Lenovo</i>
<i>Adapter Of Notebook PC</i>	<i>ThinkPad 57Y4614</i>	---	<i>Lenovo</i>
<i>Mouse</i>	<i>MO32B0</i>	<i>23-033131</i>	<i>IBM</i>
<i>Keyboard</i>	<i>SK-1788</i>	---	<i>Lenovo</i>
<i>Telephone</i>	<i>HCD129P/ TSDL 2953</i>	---	<i>DAERXUN</i>

Continue on to next page...


Cable Description					
Description	From	To	Length (Meters)	Shielded (Y/N)	Ferrite (Y/N)
<i>Power Cord Of Notebook PC</i>	<i>Adapter</i>	<i>Notebook PC</i>	<i>1.6</i>	<i>N</i>	<i>Y</i>
	<i>Adapter</i>	<i>Plug</i>	<i>1.2</i>	<i>N</i>	<i>Y</i>
<i>Mouse cord</i>	<i>Mouse</i>	<i>Plug</i>	<i>1.2</i>	<i>N</i>	<i>Y</i>
<i>Keyboard cord</i>	<i>Keyboard</i>	<i>Plug</i>	<i>1.2</i>	<i>N</i>	<i>Y</i>
<i>RJ-45 Cord</i>	<i>EUT</i>	<i>Notebook PC</i>	<i>1.5</i>	<i>N</i>	<i>N</i>
<i>Power Adapter #1 cord of EUT</i>	<i>EUT</i>	<i>Plug</i>	<i>1.8</i>	<i>N</i>	<i>Y</i>
<i>Power Adapter #2 cord of EUT</i>	<i>EUT</i>	<i>Plug</i>	<i>1.8</i>	<i>N</i>	<i>N</i>
<i>Power Adapter #3 cord of EUT</i>	<i>EUT</i>	<i>Plug</i>	<i>1.8</i>	<i>N</i>	<i>N</i>
<i>Note: The "EUT" means "ATA".</i>					

NOTE: The EUT has been tested as an independent unit together with other necessary accessories or support units. The above support units or accessories were used to form a representative test configuration during the test tests.


Configuration of Tested System

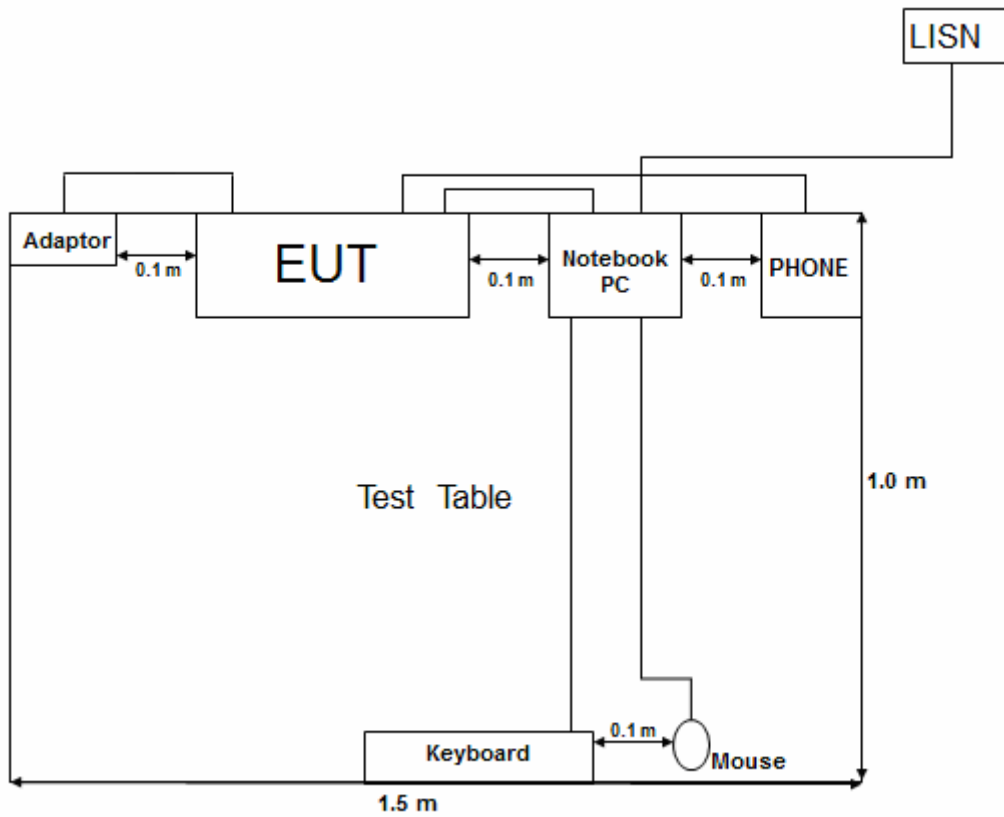


ATTACHMENT 1 - CONDUCTED EMISSION TEST RESULTS

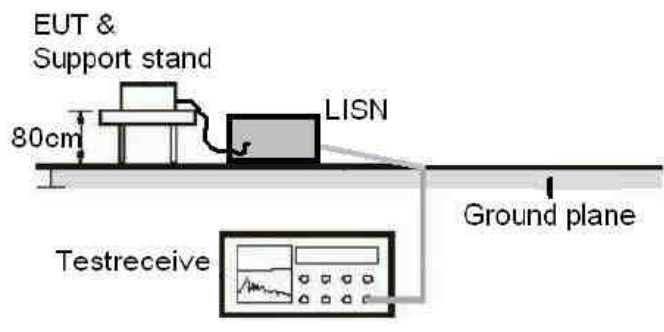CLIENT:	Grandstream Networks, INC	TEST STANDERD:	FCC Part 15, Subpart B, Section 15.107
MODEL NUMBERS:	HT701	PRODUCT:	ATA
MODEL TESTED:	HT701	EUT DESIGNATION:	Home or Office
TEMPERATURE:	23°C	HUMIDITY:	51%
ATM PRESSURE:	103kPa	GROUNDING:	None
TESTED BY:	Daomen	DATE OF TEST:	September 24 th , 2013
TEST REFERENCE:	ANSI C63.4 -2003		
TEST PROCEDURE:	The EUT was set up according to the guidelines of ANSI C63.4 -2003 for conducted emissions. The measurement was using a AMN on each line and an EMI receiver peak scan was made at the frequency measurement range. The six highest significant peaks were then marked, and these signals were then quasi-peaked and averaged. The frequency range investigated was from 150KHz to 30MHz.		
DESCRIPTION OF TEST MODE	As normal use		
TEST SET UP	 <p>The diagram illustrates the test setup. It shows an EUT (Equipment Under Test) and its support stand on a table. The stand height is indicated as 80cm. The EUT is connected to a LISN (Line Impedance Stabilization Network). The LISN is connected to a Testreceive device (EMI receiver). The Testreceive device is connected to a Ground plane. The diagram also shows a power source connected to the LISN.</p>		
TESTED RANGE:	150kHz to 30MHz		
TEST VOLTAGE:	AC 120V/60Hz		
RESULTS:	The EUT meets the requirements of test reference for Conducted Emissions. The test results relate only to the equipment under test provided by client.		
CHANGES OR MODIFICATIONS:	There were no modifications installed by ECMG Electronic Technical Testing Corp (Shenzhen). test personnel.		
M. UNCERTAINTY:	Freq. $\pm 2 \times 10^{-7}$ x Center Freq., Amp ± 2.6 dB		

Power Adaptor #1:(Mass power)

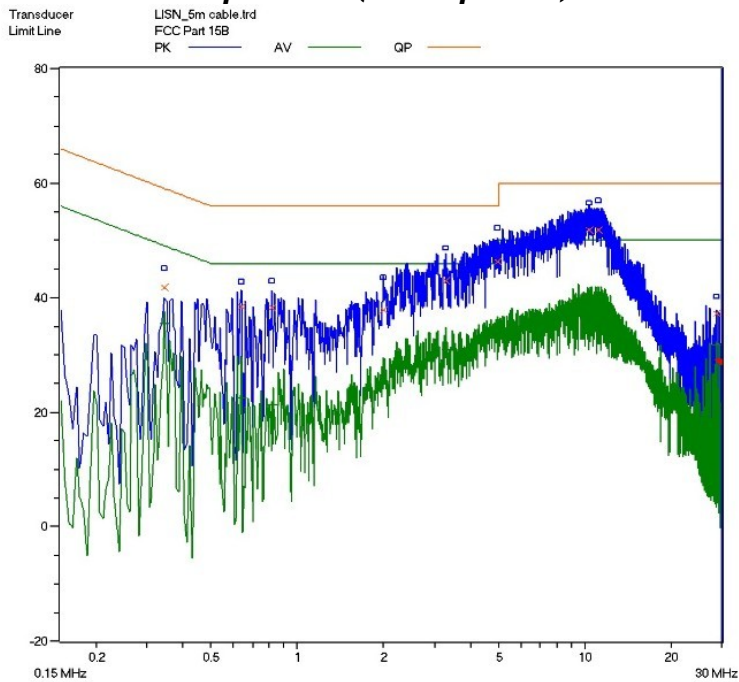


Line L Conducted Emission Graph

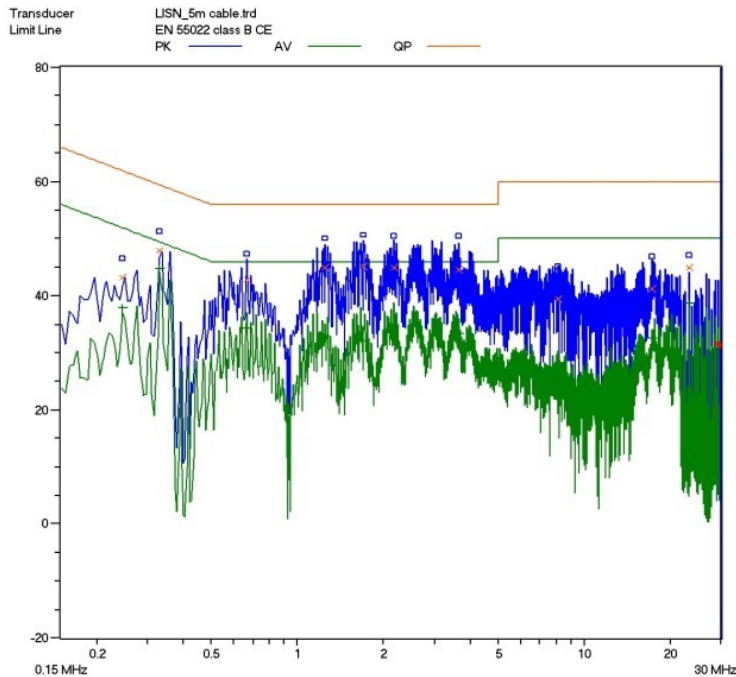


Line N Conducted Emission Graph

Power Adaptor #2:(UE power)

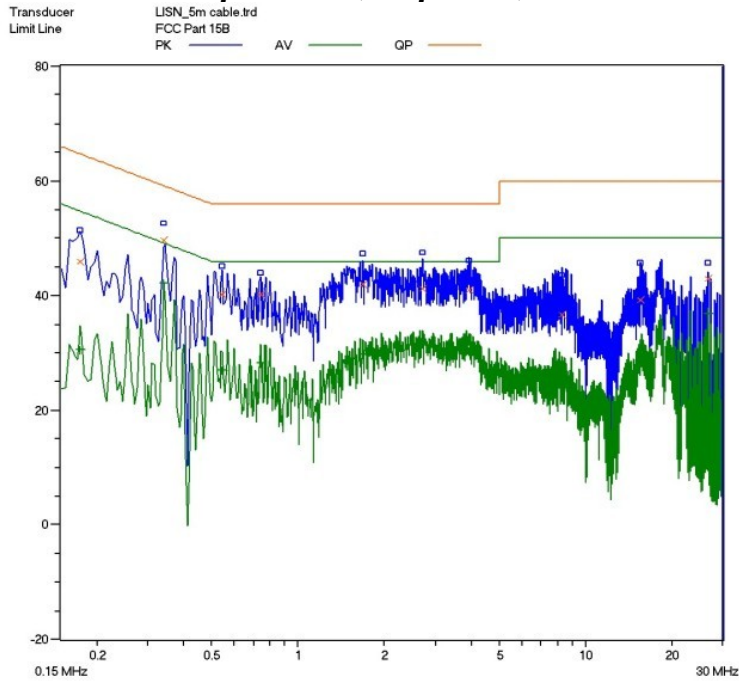


Line L Conducted Emission Graph

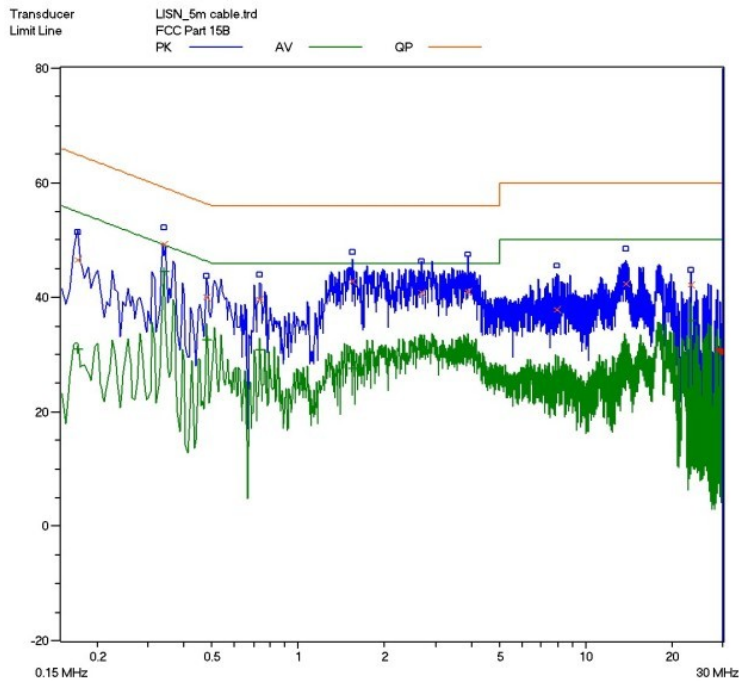


Line N Conducted Emission Graph

Power Adaptor #3:(Mass power)

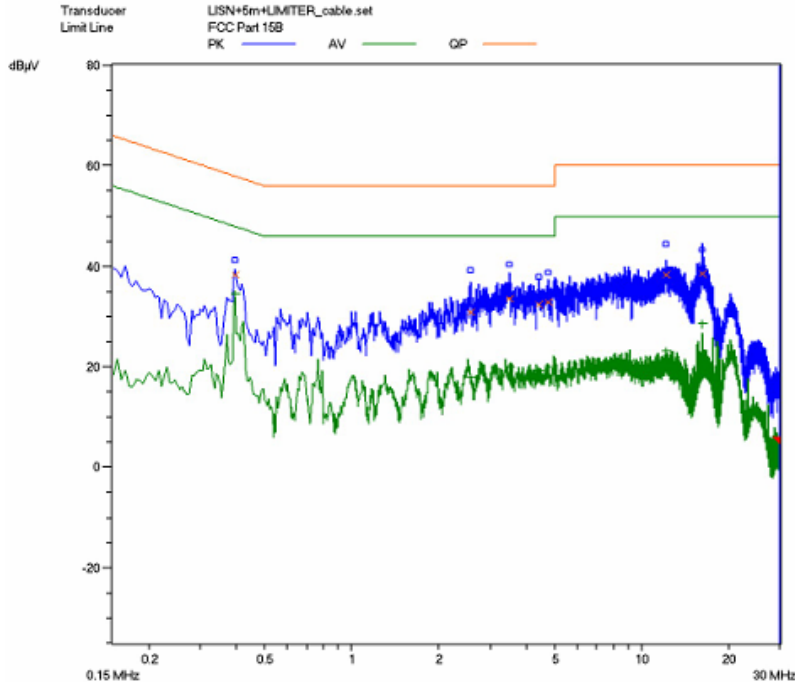

Line L Conducted Emission Graph

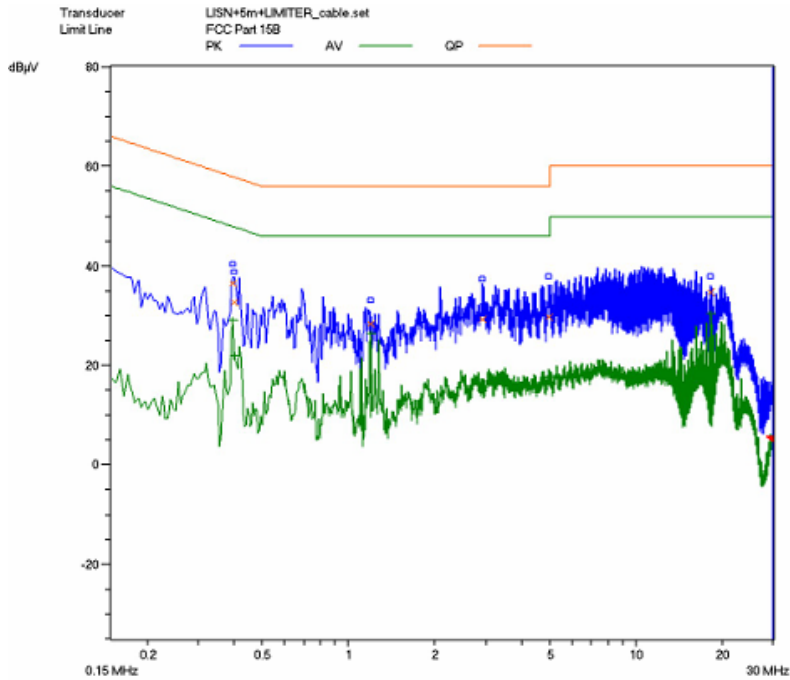

Line N Conducted Emission Graph

Test Data
Power Adaptor #1(Mass power)

Lines (L/N)	Frequency (MHz)	Corrected QP Level (dBuV)	Limits QP (dBuV)	Margin QP (dB)	Frequency (MHz)	Corrected AV Level (dBuV)	Limits AV (dBuV)	Margin QP (dB)
L	0.345	41.7	59.1	-17.4	0.345	35.5	49.1	-13.6
L	3.275	43.0	56	-13.0	3.275	31.0	46	-15.0
L	4.950	46.4	56	-9.6	4.950	33.4	46	-12.6
N	0.245	43.2	61.9	-18.7	0.245	38.0	51.9	-13.9
N	0.330	47.9	59.5	-11.6	0.330	44.8	49.5	-4.7
N	0.665	42.8	56	-13.2	0.665	34.2	46	-11.8

Note :

- 1) All readings are using a bandwidth of 9 kHz, with a 500 ms sweep time. A video filter was not use.
- 2) "QP" means "Quasi-Peak" values, "AV" means "Average" values.
- 3) The other reading are too low against official limits that are not be recorded.

Power Adaptor #2(UE power)

Lines (L/N)	Frequency (MHz)	Corrected QP Level (dBuV)	Limits QP (dBuV)	Margin QP (dB)	Frequency (MHz)	Corrected AV Level (dBuV)	Limits AV (dBuV)	Margin QP (dB)
L	0.340	49.7	59.2	-9.5	0.340	42.2	49.2	-7.0
L	1.675	42.1	56	-13.9	1.675	29.8	46	-16.2
L	2.720	41.1	56	-14.9	2.720	31.5	46	-14.5
N	0.340	49.3	59.2	-9.9	0.340	44.7	49.2	-4.5
N	1.535	42.8	56	-13.2	1.535	27.6	46	-18.4
N	3.870	41.0	56	-15	3.870	30.6	46	-15.4

Note :

- 1) All readings are using a bandwidth of 9 kHz, with a 500 ms sweep time. A video filter was not use.
- 2) "QP" means "Quasi-Peak" values, "AV" means "Average" values.
- 3) The other reading are too low against official limits that are not be recorded.

Power Adaptor #3(Mass power)

Lines (L/N)	Frequency (MHz)	Corrected QP Level (dBuV)	Limits QP (dBuV)	Margin QP (dB)	Frequency (MHz)	Corrected AV Level (dBuV)	Limits AV (dBuV)	Margin QP (dB)
L	0.395	38.4	58	-19.6	0.395	34.6	48	-13.4
L	2.575	30.8	56	-25.2	2.575	18.0	46	-28.0
L	3.505	33.6	56	-22.4	3.505	20.0	46	-26.0
N	0.395	36.6	58	-21.4	0.395	29.1	48	-18.9
N	0.400	32.3	57.9	-25.6	0.400	22.2	47.9	-25.7
N	1.190	28.3	56	-27.7	1.190	26.3	46	-19.7

Note :

- 1) All readings are using a bandwidth of 9 kHz, with a 500 ms sweep time. A video filter was not use.
- 2) "QP" means "Quasi-Peak" values, "AV" means "Average" values.
- 3) The other reading are too low against official limits that are not be recorded.

Test Equipment List:

Test Equipment	Model No.	Manufacturer	Serial No.	Last Cal.	Cal. Interval
Receiver	SMR4503	SCHAFFNER	11725	2013.07.08	2014.07.08
Line impedance stabilization network	4825/2	ETS	1161	2013.07.08	2014.07.08

Note: All testing were performed using internationally recognized standards. All test instruments were calibrated.

TESTED BY: Daomen GALANZ
COMPANY NAME
ENGINEER

REVIEWED BY: Janeyan ECMG
COMPANY NAME
SENIOR ENGINEER



Conducted Emission Test Set-up-Front View



Conducted Emission Test Set-up-Rear View

ATTACHMENT 2 – RADIATED EMISSION MEASUREMENT

CLIENT:	Grandstream Networks, INC	TEST STANDERD:	FCC Part 15,Subpart B, Section 15.109
MODEL NUMBERS:	HT701	PRODUCT:	ATA
EUT MODEL:	HT701	EUT DESIGNATION:	Home or Office
TEMPERATURE:	23°C	HUMIDITY:	49%RH
ATM PRESSURE:	103.0kPa	GROUNDING:	None
TESTED BY:	Daomen	DATE OF TEST:	September 24 th , 2013
TEST REFERENCE:	ANSI C63.4 -2003		
TEST PROCEDURE:	<p>The EUT was set up according to the guidelines of ANSI C63.4 -2003 for radiated emissions. An EMI receiver peak scan was made at the frequency measurement range (pre-scan) in an Anechoic chamber.signal discrimination was then performed and the significant peaks marked.these peaks were then quasi-peaked in the frequency range of 30 MHz to 1GHz and average and peak in the frequency range of 1 GHz to 5GHz at an anechoic chamber.</p> <p>The following data lists the significant emission frequencies, measured levels, correction factors (including cable and antenna correction factors), and the corrected readings against the limits. Explanation of the Correction Factor are given as follows:</p> <p>FS= RA + AF + CF - AG</p> <p>Where: FS = Field Strength</p> <p>RA = Receiver Amplitude</p> <p>AF = Antenna Factor</p> <p>CF = Cable Attenuation Factor</p> <p>AG = Amplifier Gain</p>		
TEST MODE	As normal use		
TESTED RANGE:	30MHz to 5GHz		
TEST VOLTAGE:	AC 120V/60Hz		
RESULTS:	The EUT meet the requirements of test reference for radiated emissions. The test results relate only to the equipment under test provided by client.		
CHANGES OR MODIFICATIONS:	There were no modifications installed by ECMG Electronic Technical Testing Corp (Shenzhen). Test personnel.		
M. UNCERTAINTY:	Freq. $\pm 2 \times 10^{-7}$ x Center Freq., Amp ± 2.6 dB		

Continue on to next page...

TEST SET-UP:

Figure 1 : Frequencies measured below 1 GHz configuration



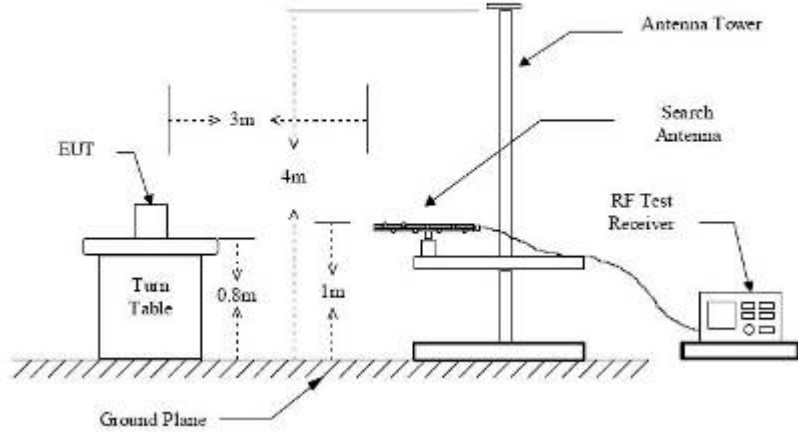



Figure 2 : Frequencies measured above 1 GHz configuration

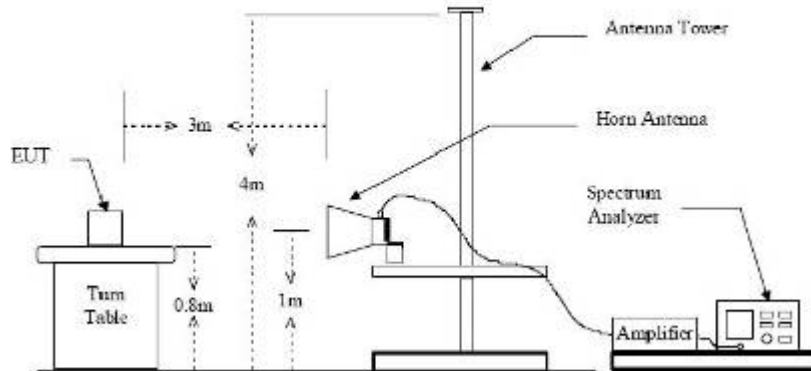

Power Adaptor #1 (Mass power)

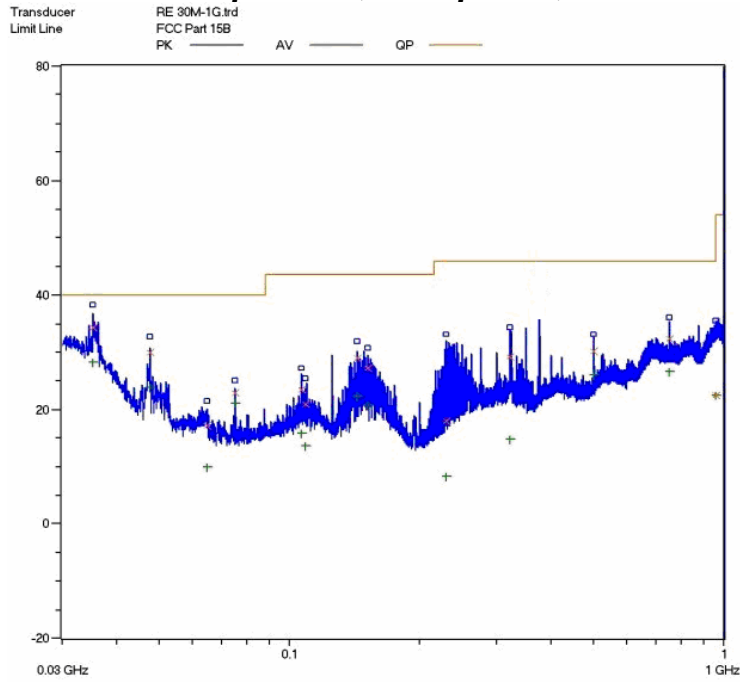


Horizontal: Radiated Emission Test Plot

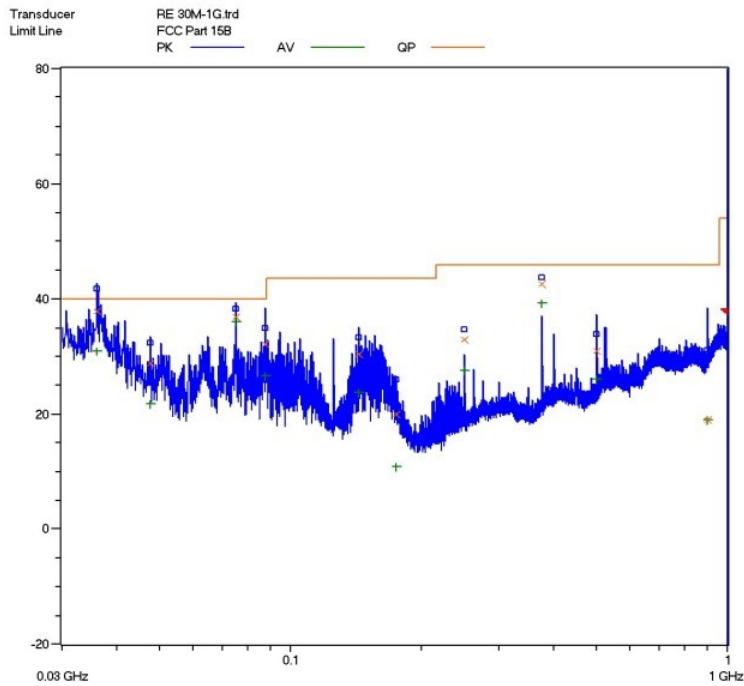


Vertical: Radiated Emission Test Plot

Power Adaptor #2(UE power)

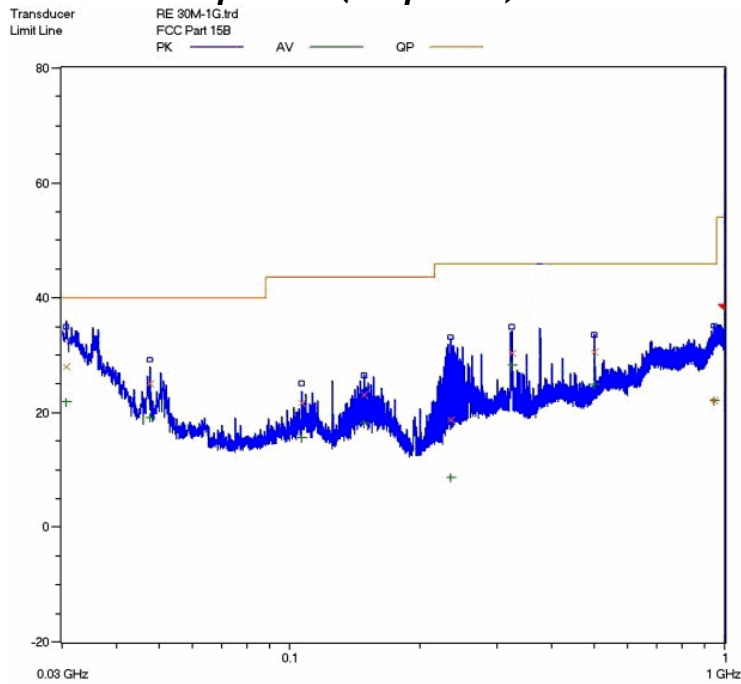


Horizontal: Radiated Emission Test Plot

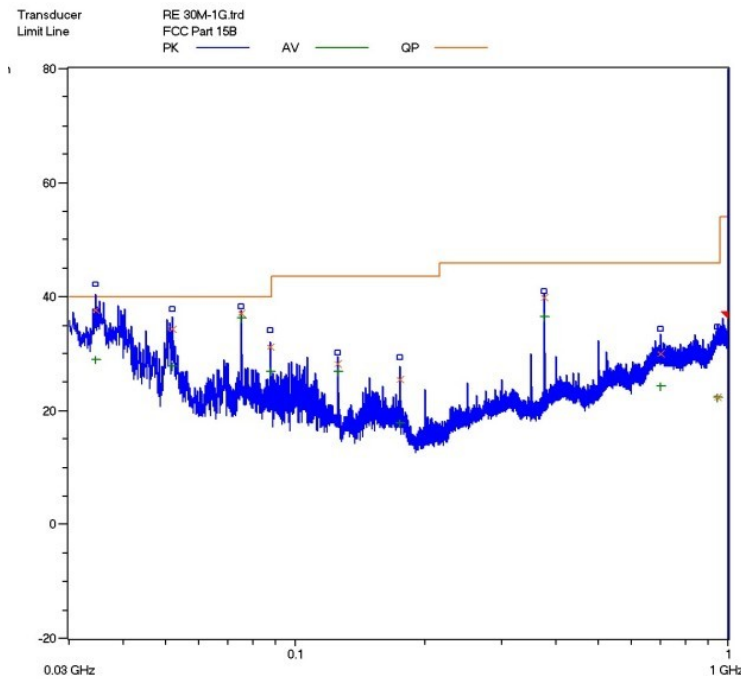


Vertical: Radiated Emission Test Plot

Power Adaptor #3(Mass power)

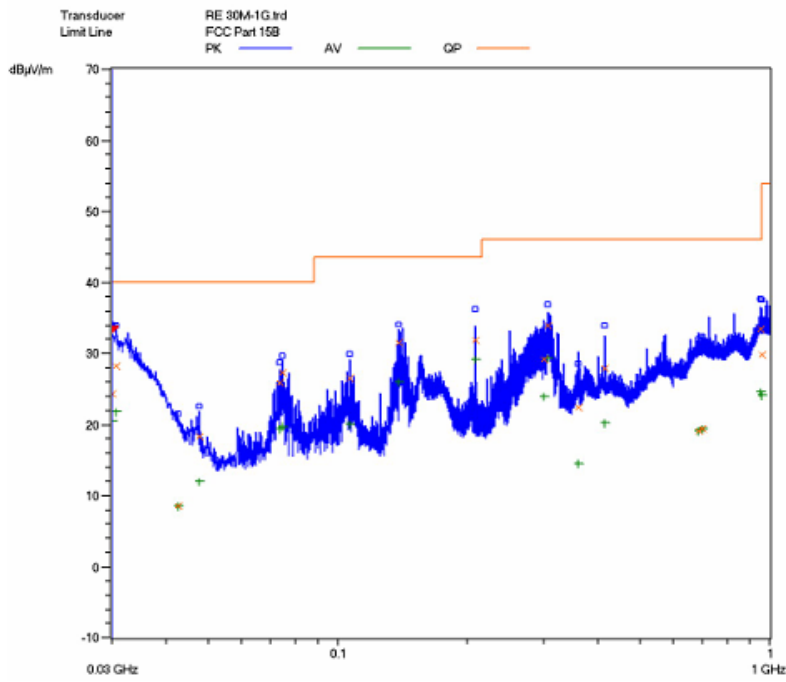

Horizontal: Radiated Emission Test Plot

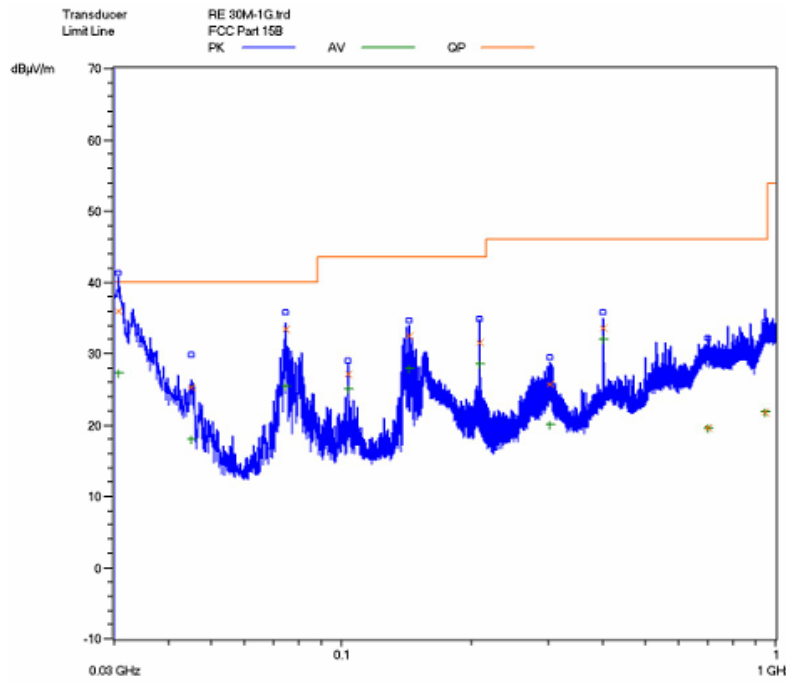

Vertical: Radiated Emission Test Plot

Test Data:
Power Adaptor #1(Mass power):
Below 1GHz:

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB)	Preamp Factor (dB)	Reading Level QP (dBuV/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
Horizontal							
35.340	0.02	18.4	/	15.98	34.4	40	-5.6
47.820	0.02	11.9	/	17.98	29.9	40	-10.1
375.000	0.16	13.7	/	30.14	41.0	46	-5.0
499.980	0.20	17.4	/	12.7	30.3	46	-15.7
750.000	0.39	21.1	/	10.91	32.4	46	-13.6
958.980	0.44	23.8	/	-1.64	22.6	46	-23.4
Vertical							
36.120	0.02	18.4	/	19.48	37.9	40	-2.1
75.000	0.02	5.3	/	31.68	37	40	-3.0
87.480	0.02	6.1	/	25.98	32.1	40	-7.9
250.020	0.12	11.8	/	21.08	33.0	46	-13.0
375.000	0.16	13.7	/	28.74	42.6	46	-3.4
500.040	0.20	17.4	/	13.5	31.1	46	-14.9

Note:

1. All readings are quasi-peak unless stated otherwise, using a QPA bandwidth of 120kHz, with a 60 s sweep time. A video filter was not used.
2. The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows: Emission Level = Reading Level + Antenna Factor + Cable Loss - Preamplifier Factor.
3. The other emission levels are 20dB below the official limits that are not reported.

Above 1GHz:

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB)	Preamplifier Factor (dB)	Reading Level (dBuV/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Polarization (H/V)
Peak Measurement								
1.000	1.39	23.9	33.6	54.46	46.15	74	-27.85	H
1.330	1.58	24.7	33.6	54.61	47.29	74	-26.71	H
1.520	1.71	26.8	33.6	54.2	49.11	74	-24.89	H
1.326	1.58	24.7	33.6	54.52	47.2	74	-26.80	V
2.400	2.3	29.3	33	50.9	49.50	74	-24.50	V
1.858	1.93	27.5	33.6	54.29	50.12	74	-23.88	V
Average Measurement								
1.329	1.58	24.7	33.6	35.4	28.08	54	-25.92	H
1.331	1.58	24.7	33.6	34.08	26.76	54	-27.24	H
1.855	1.93	27.5	33.6	31.92	27.75	54	-26.25	H
1.326	1.58	24.7	33.6	36.63	29.31	54	-24.69	V
2.400	2.3	29.3	33	33.02	31.62	54	-22.38	V
1.858	1.93	27.5	33.6	33.87	29.7	54	-24.30	V

Note:

1. The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows: Emission Level = Reading Level + Antenna Factor + Cable Loss - Preamplifier Factor.
2. The limits shown are based on Peak value and Average value detector above 1GHz, the bandwidth of Test Receiver was set at 1MHz above 1GHz.
3. The other emission levels are 20dB below the official limits that are not reported.

**Power Adaptor #2(UE power):
Below 1GHz:**

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB)	Preamplifier Factor (dB)	Reading Level QP (dBuV/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
Horizontal							
30.600	0.02	16.7	/	11.28	28.0	40	-12.0
47.820	0.02	11.9	/	13.18	25.1	40	-14.9
325.020	0.16	13.5	/	16.64	30.3	46	-15.7
375.000	0.16	13.7	/	30.14	40.0	46	-6.0
499.980	0.20	17.4	/	12.9	30.5	46	-15.5
945.780	0.44	23.8	/	-2.04	22.2	46	-23.8
Vertical							
34.620	0.02	18.4	/	19.18	37.6	40	-2.4
51.840	0.02	8.2	/	26.08	34.3	40	-5.7
75.000	0.02	5.3	/	31.68	37.0	40	-3.0
87.480	0.02	6.1	/	24.98	31.1	40	-8.9
375.000	0.16	13.7	/	25.94	39.8	46	-6.2
700.020	0.36	20.4	/	9.24	30	46	-16.0

Note:

1. All readings are quasi-peak unless stated otherwise, using a QPA bandwidth of 120kHz, with a 60 s sweep time. A video filter was not used.
2. The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows: Emission Level = Reading Level + Antenna Factor + Cable Loss - Preamplifier Factor.
3. The other emission levels are 20dB below the official limits that are not reported.

Above 1GHz:

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB)	Preamplifier Factor (dB)	Reading Level (dBuV/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Polarization (H/V)
Peak Measurement								
1.000	1.39	23.9	33.6	57.52	49.21	74	-24.79	H
1.330	1.58	24.7	33.6	56.3	48.98	74	-25.02	H
1.520	1.71	26.8	33.6	52.65	47.56	74	-26.44	H
1.326	1.58	24.7	33.6	56.23	48.91	74	-25.09	V
2.400	2.3	29.3	33	50.71	49.31	74	-24.69	V
1.858	1.93	27.5	33.6	52.38	48.21	74	-25.79	V
Average Measurement								
1.329	1.58	24.7	33.6	36.45	29.13	54	-24.87	H
1.331	1.58	24.7	33.6	34.54	27.22	54	-26.78	H
1.855	1.93	27.5	33.6	34.07	29.90	54	-24.10	H
1.326	1.58	24.7	33.6	34.67	27.35	54	-26.65	V
2.400	2.3	29.3	33	31.52	30.12	54	-23.88	V
1.858	1.93	27.5	33.6	34.44	30.27	54	-23.73	V

Note:

1. The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows: Emission Level = Reading Level + Antenna Factor + Cable Loss - Preamplifier Factor.
2. The limits shown are based on Peak value and Average value detector above 1GHz, the bandwidth of Test Receiver was set at 1MHz above 1GHz.
3. The other emission levels are 20dB below the official limits that are not reported.

**Power Adaptor #3(Mass power):
Below 1GHz:**

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB)	Preamplifier Factor (dB)	Reading Level QP (dBuV/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
Horizontal							
138.400	0.02	7.7	/	23.88	31.6	43.5	-11.9
207.360	0.12	7.2	/	24.48	31.8	43.5	-11.7
300.000	0.16	13.3	/	15.74	29.2	46	-16.8
306.640	0.16	13.7	/	20.14	34.0	46	-12.0
414.720	0.2	15.1	/	12.70	28.0	46	-18.0
954.240	0.44	24	/	9.06	33.5	46	-12.5
Vertical							
30.640	0.02	16.7	/	19.28	36.0	40	-4.0
74.560	0.02	5.3	/	28.08	33.4	40	-6.6
143.280	0.02	8.3	/	24.18	32.5	43.5	-11.0
207.360	0.12	7.2	/	24.28	31.6	43.5	-11.9
302.560	0.16	13.7	/	11.84	25.7	46	-20.3
400.000	0.16	14.7	/	18.84	33.7	46	-12.3

Note:

1. All readings are quasi-peak unless stated otherwise, using a QPA bandwidth of 120kHz, with a 60 s sweep time. A video filter was not used.
2. The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows: Emission Level = Reading Level + Antenna Factor + Cable Loss - Preamplifier Factor.
3. The other emission levels are 20dB below the official limits that are not reported.

Above 1GHz:

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB)	Preamplifier Factor (dB)	Reading Level (dBuV/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Polarization (H/V)
Peak Measurement								
1.000	1.39	23.9	33.6	-8.76	50.13	74	-23.87	H
1.330	1.67	25.9	33.6	-7.9	53.27	74	-20.73	H
1.520	1.74	26.2	33.6	-6.44	55.10	74	-18.90	H
1.860	1.95	27.6	33.6	-10.05	53.10	74	-20.90	V
2.130	2.11	28.3	33.0	-10.7	52.71	74	-21.29	V
2.390	2.28	29.2	33.0	-12.48	52.00	74	-22.00	V
Average Measurement								
1.060	1.40	24.1	33.6	-24	35.10	54	-18.90	H
1.520	1.71	26.1	33.6	-27.21	34.20	54	-19.80	H
1.590	1.75	26.8	33.6	-32.15	30.00	54	-24.00	H
1.331	1.65	25.1	33.6	-27.21	33.14	54	-20.86	V
1.855	1.92	27.5	33.6	-30.92	32.10	54	-21.90	V
2.129	2.13	28.3	33.0	-31.43	32.00	54	-22.00	V


Note:

1. The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows: Emission Level = Reading Level + Antenna Factor + Cable Loss - Preamplifier Factor.
2. The limits shown are based on Peak value and Average value detector above 1GHz, the bandwidth of Test Receiver was set at 1MHz above 1GHz.
3. The other emission levels are 20dB below the official limits that are not reported.


Test Equipment List:

Test Equipment	Model No.	Manufacturer	Serial No.	Last Cal.	Cal. Due
Receiver	SMR4503	SCHAFFNER	11725	2013.07.08	2014.07.07
Double-ridged Wave guide horn	3115	ETS	6587	2013.08.02	2014.08.01
Microwave system amplifier	83017A	Agilent	MY39500438	2013.07.11	2014.07.10
Biconilog Antenna	3142C	ETS	00042672	2013.09.28	2014.09.27
Band-pass Filter	BRM50702	Micro-Tronic	S/N-030	2012.11.30	2013.11.29
Spectrum Analyzer	FSP30	R&S	100755	2012.11.30	2013.11.29


Note: All testing were performed using internationally recognized standards. All test instruments were calibrated.

TESTED BY:  GALANZ
ENGINEER COMPANY NAME


REVIEWED BY:  ECMG
SENIOR ENGINEER COMPANY NAME

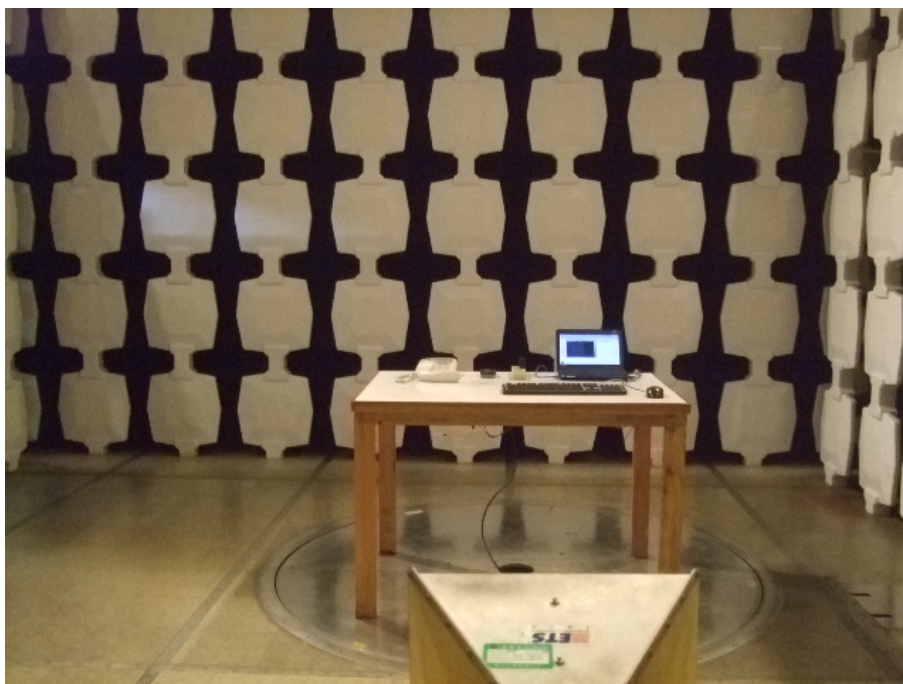

Radiated Emission Test Set-up (below 1GHz)

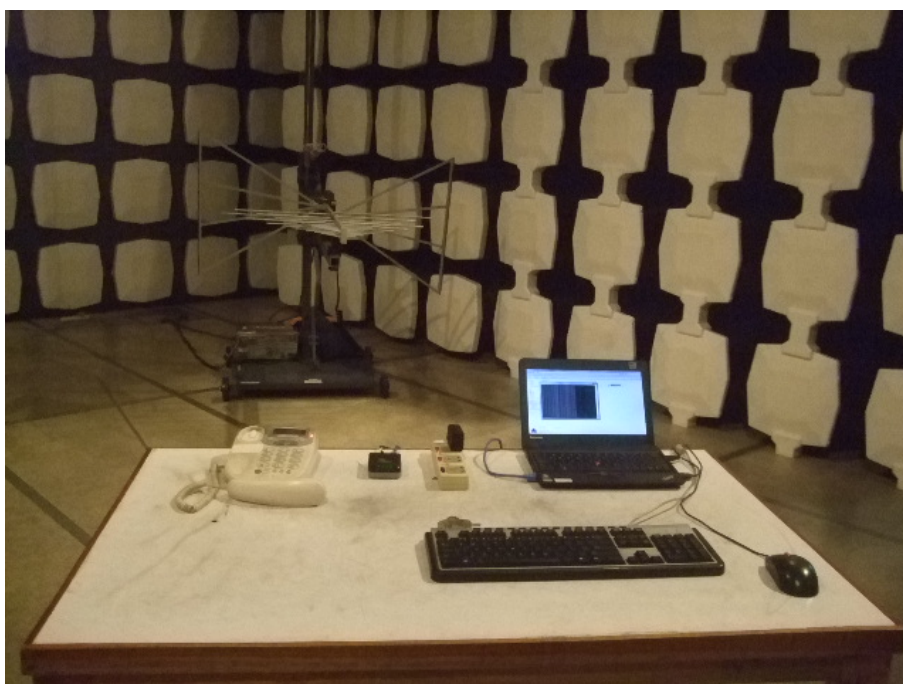

Radiated Emission Test Set-up (Above 1GHz)

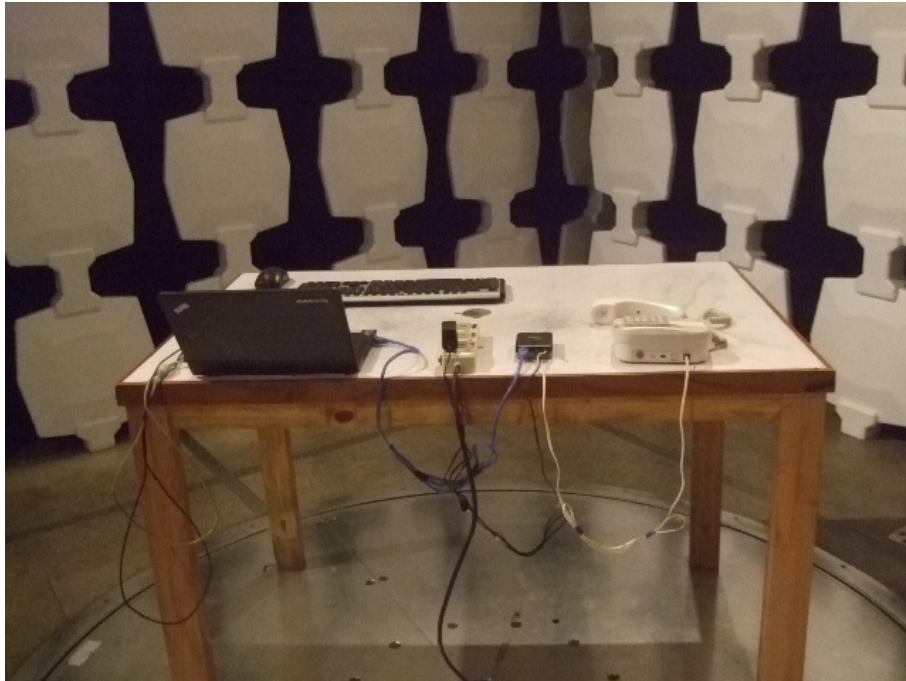

Radiated Emission Test Set-up (Rear View)