

# RF Test Data for ZigBee (Conducted Measurements)

General Description of EUT	
<b>Product Name:</b>	Smart Sprinkler Timer
<b>Test Model:</b>	NAS-WV05B
<b>Sample ID:</b>	HC-C-202406-0134-01-02
Environmental Conditions	
<b>Temperature:</b>	24.6°C
<b>Relative Humidity:</b>	52.6%
<b>Test Voltage:</b>	DC 6V
<b>Test Engineer:</b>	Jolin Lee
Note: For a more detailed features description, please refer to the report TBR-C-202406-0134-4 The report only show the worst case data.	



## Contents

1. Duty Cycle.....	3
2. Maximum Conducted Output Power.....	6
3. -6dB Bandwidth.....	9
4. Occupied Channel Bandwidth.....	12
5. Maximum Power Spectral Density Level.....	15
6. Band Edge.....	18
7. Conducted RF Spurious Emission.....	21
8. Restrict Band.....	25




## 1. Duty Cycle


Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	ZigBee	2405	Ant1	32.94	4.82	1.19
NVNT	ZigBee	2440	Ant1	33.07	4.81	1.19
NVNT	ZigBee	2480	Ant1	32.55	4.87	1.2

Test Graphs


Duty Cycle NVNT ZigBee 2405MHz Ant1

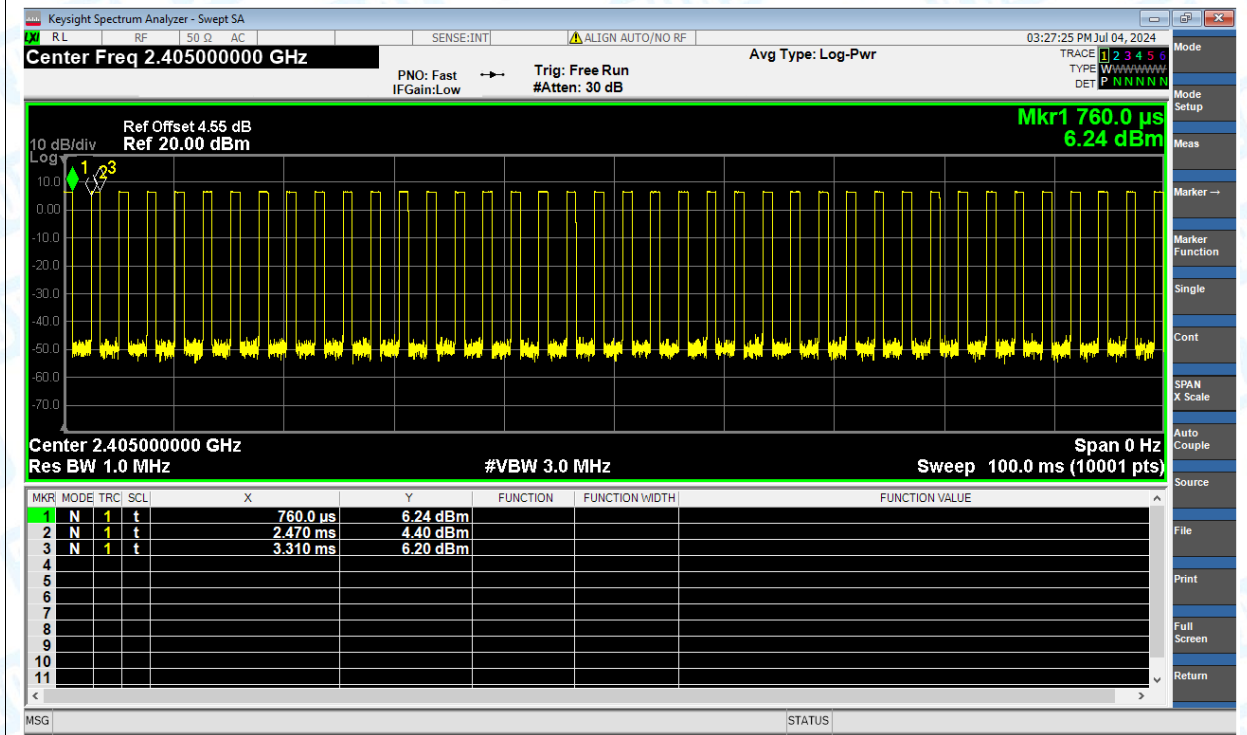

Duty Cycle NVNT ZigBee 2440MHz Ant1

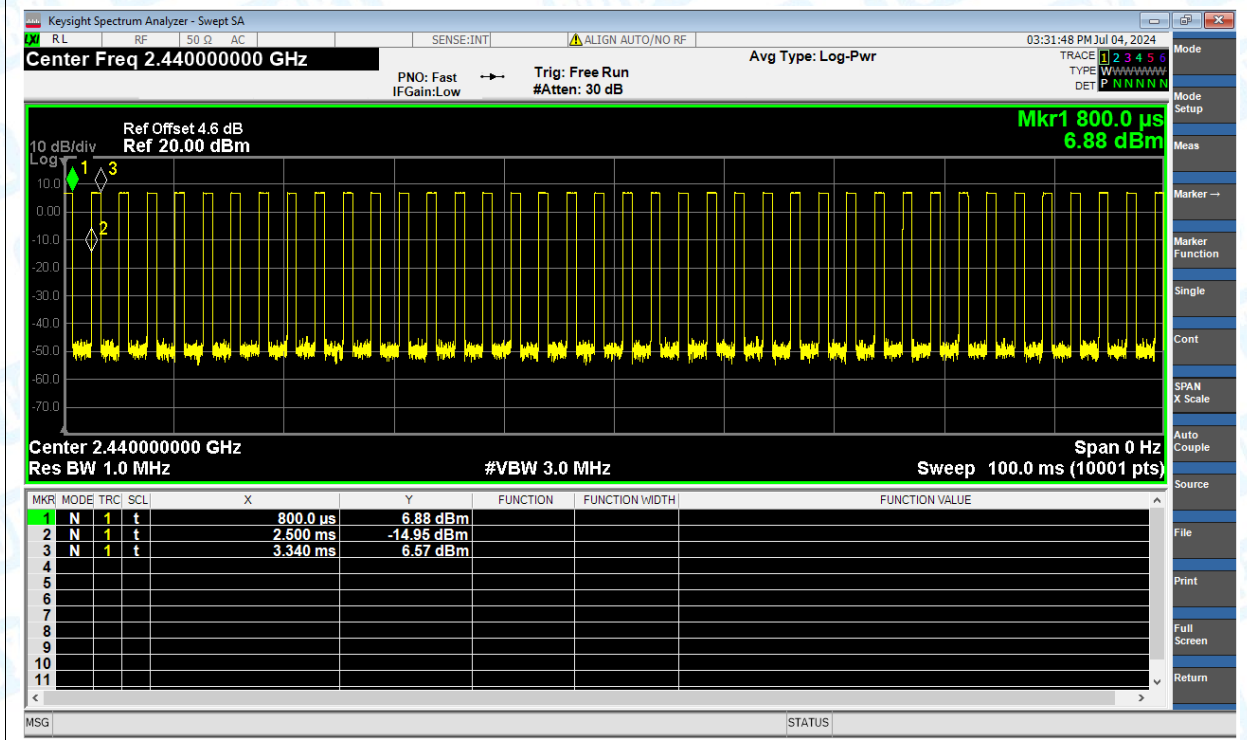



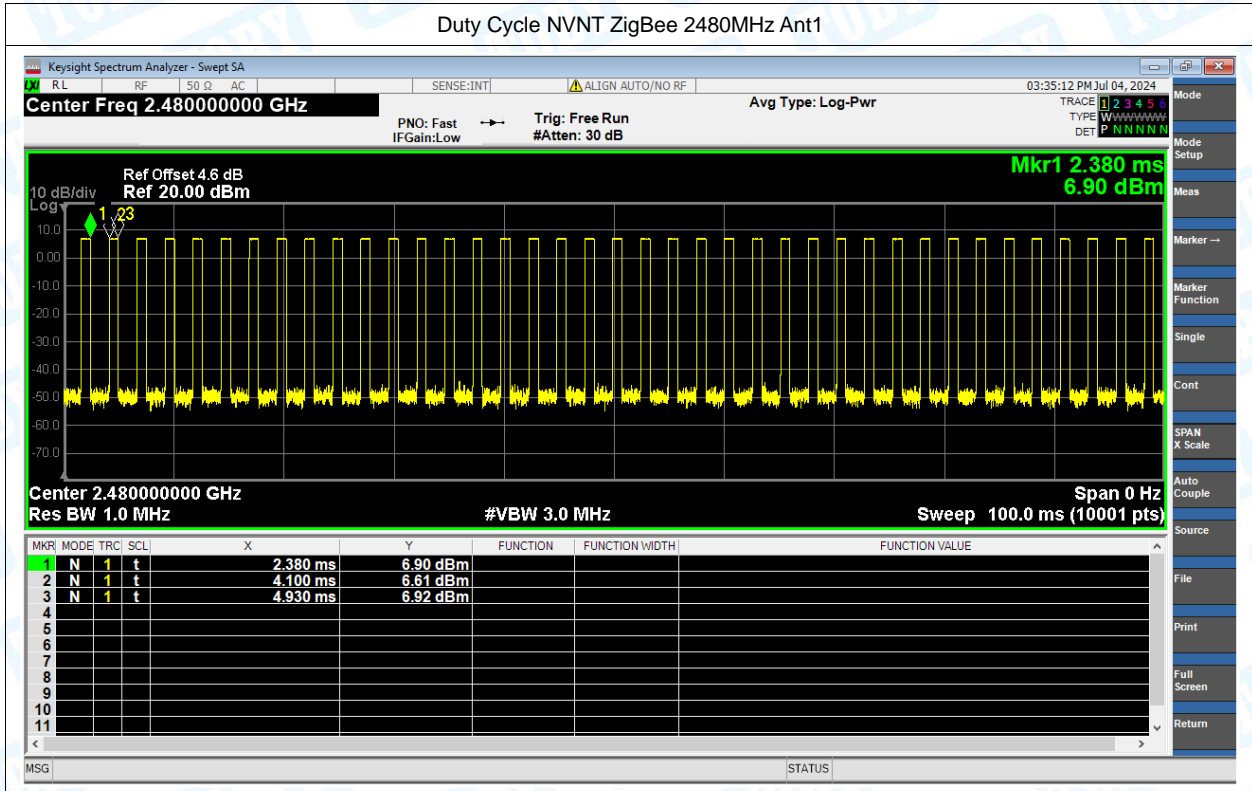


## 2. Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	ZigBee	2405	Ant1	7.27	30	Pass
NVNT	ZigBee	2440	Ant1	7.782	30	Pass
NVNT	ZigBee	2480	Ant1	7.677	30	Pass




Test Graphs

Power NVNT ZigBee 2405MHz Ant1

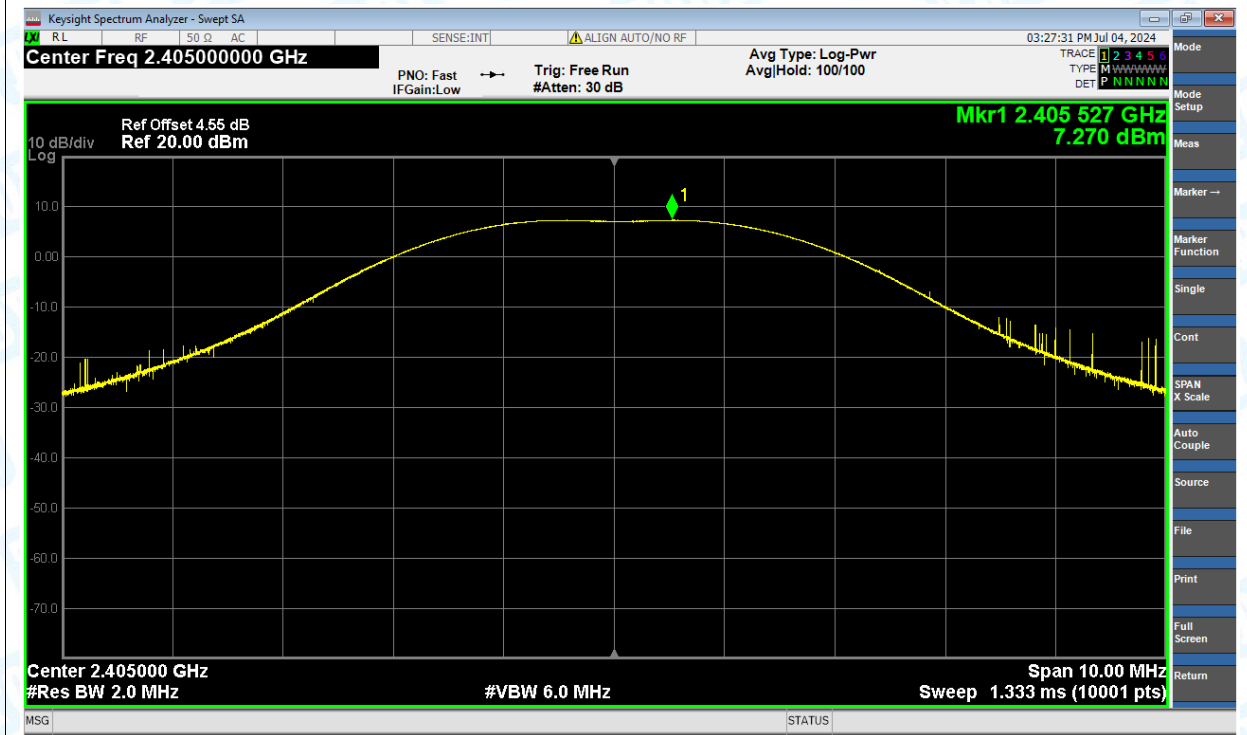

Power NVNT ZigBee 2440MHz Ant1

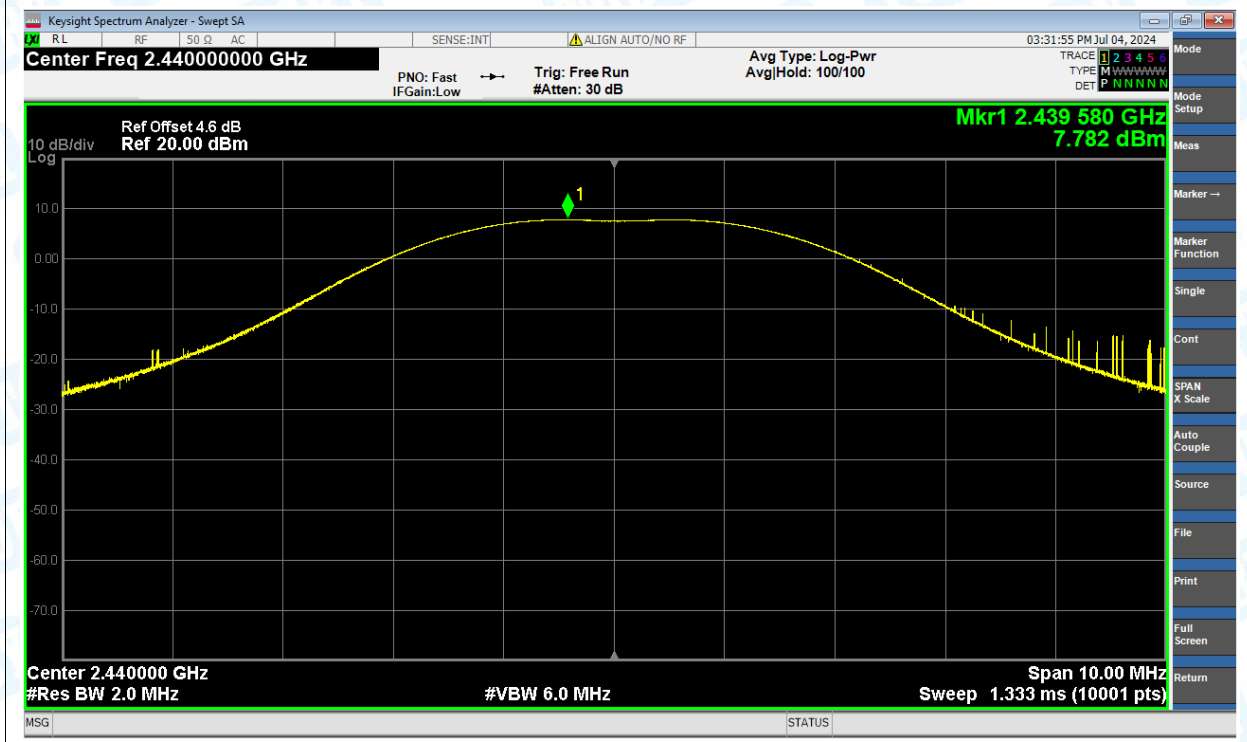






### 3. -6dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	ZigBee	2405	Ant1	1.58	0.5	Pass
NVNT	ZigBee	2440	Ant1	1.57	0.5	Pass
NVNT	ZigBee	2480	Ant1	1.58	0.5	Pass

Test Graphs


-6dB Bandwidth NVNT ZigBee 2405MHz Ant1

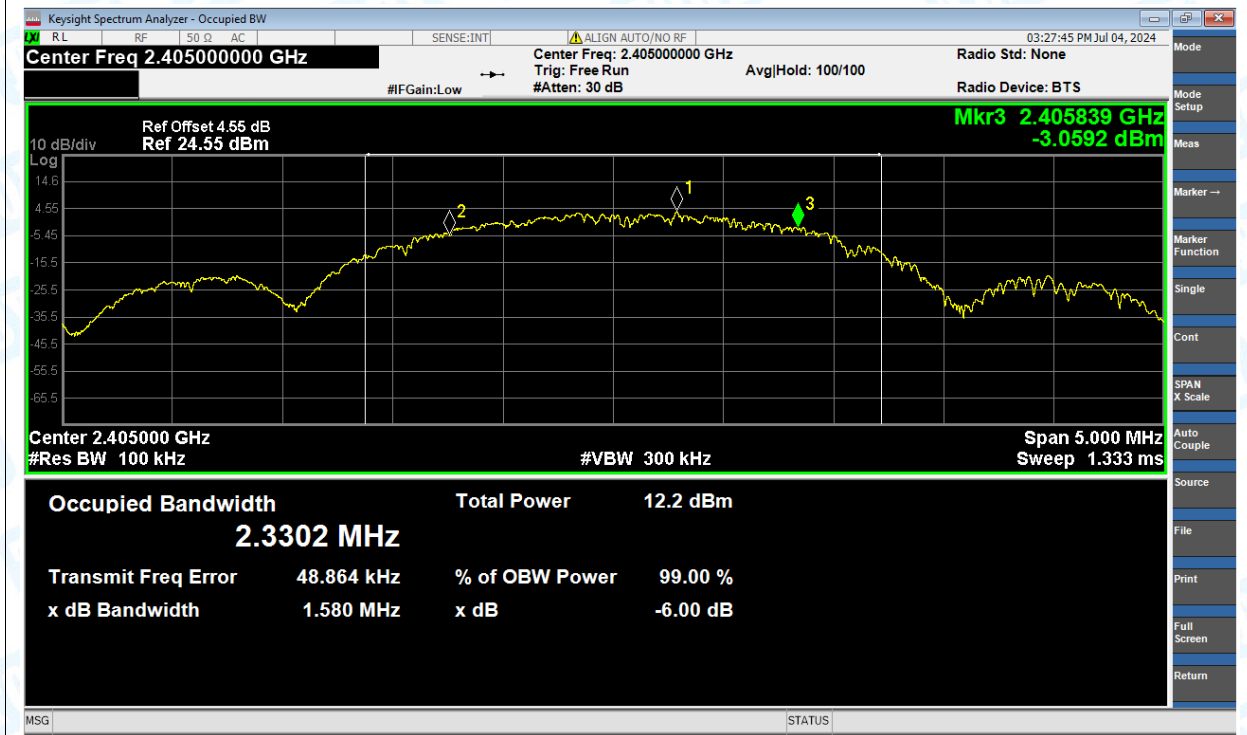

-6dB Bandwidth NVNT ZigBee 2440MHz Ant1

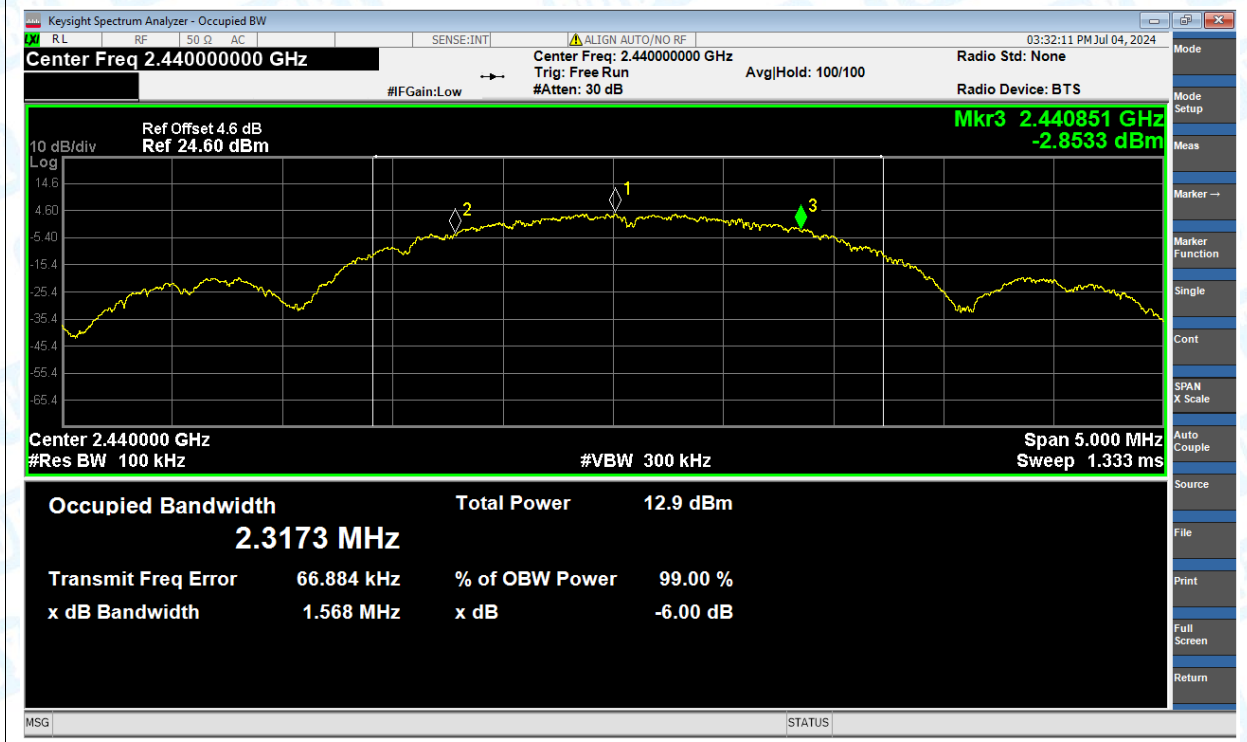



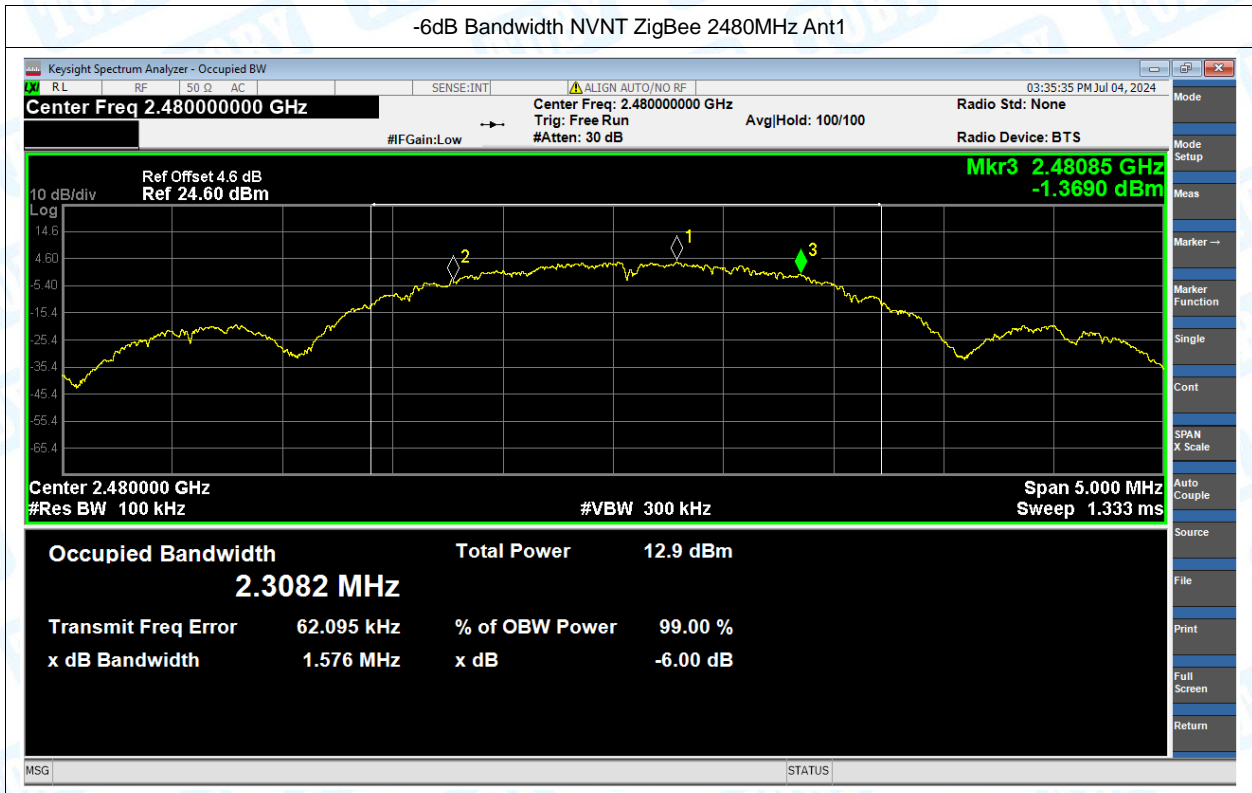


## 4. Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	ZigBee	2405	Ant1	2.327
NVNT	ZigBee	2440	Ant1	2.321
NVNT	ZigBee	2480	Ant1	2.309





Test Graphs

OBW NVNT ZigBee 2405MHz Ant1

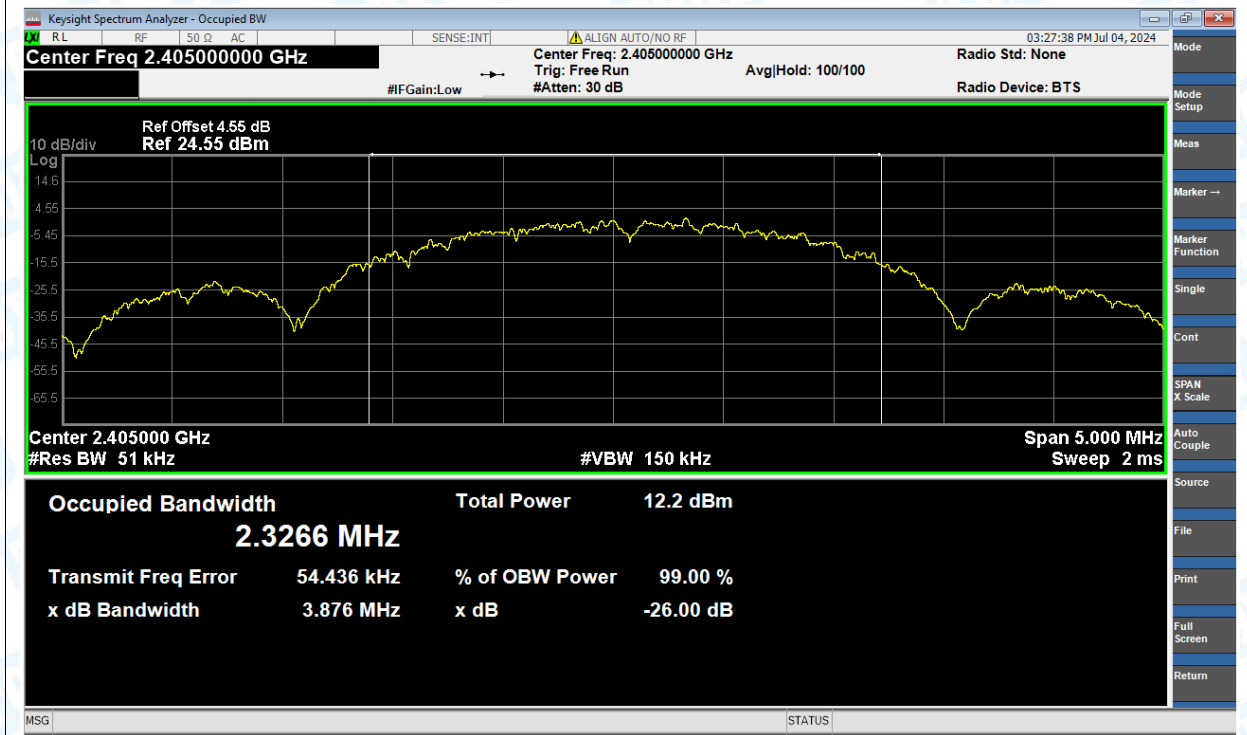

OBW NVNT ZigBee 2440MHz Ant1

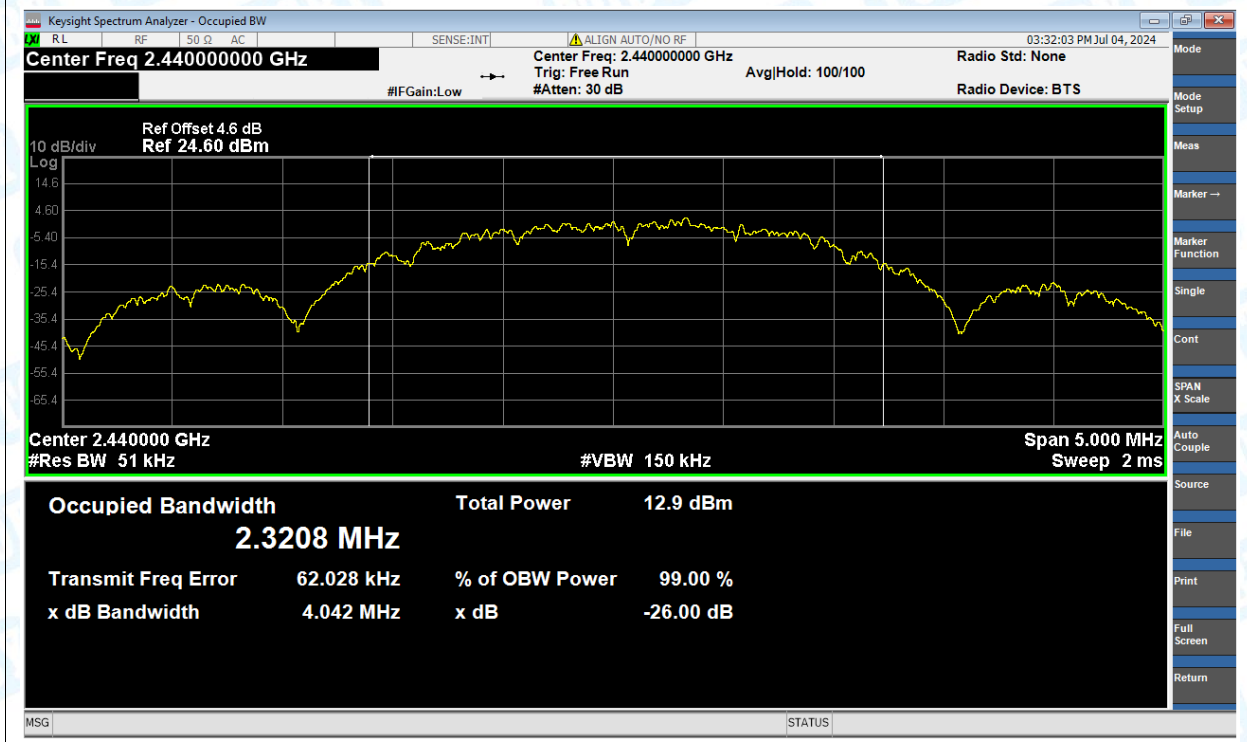

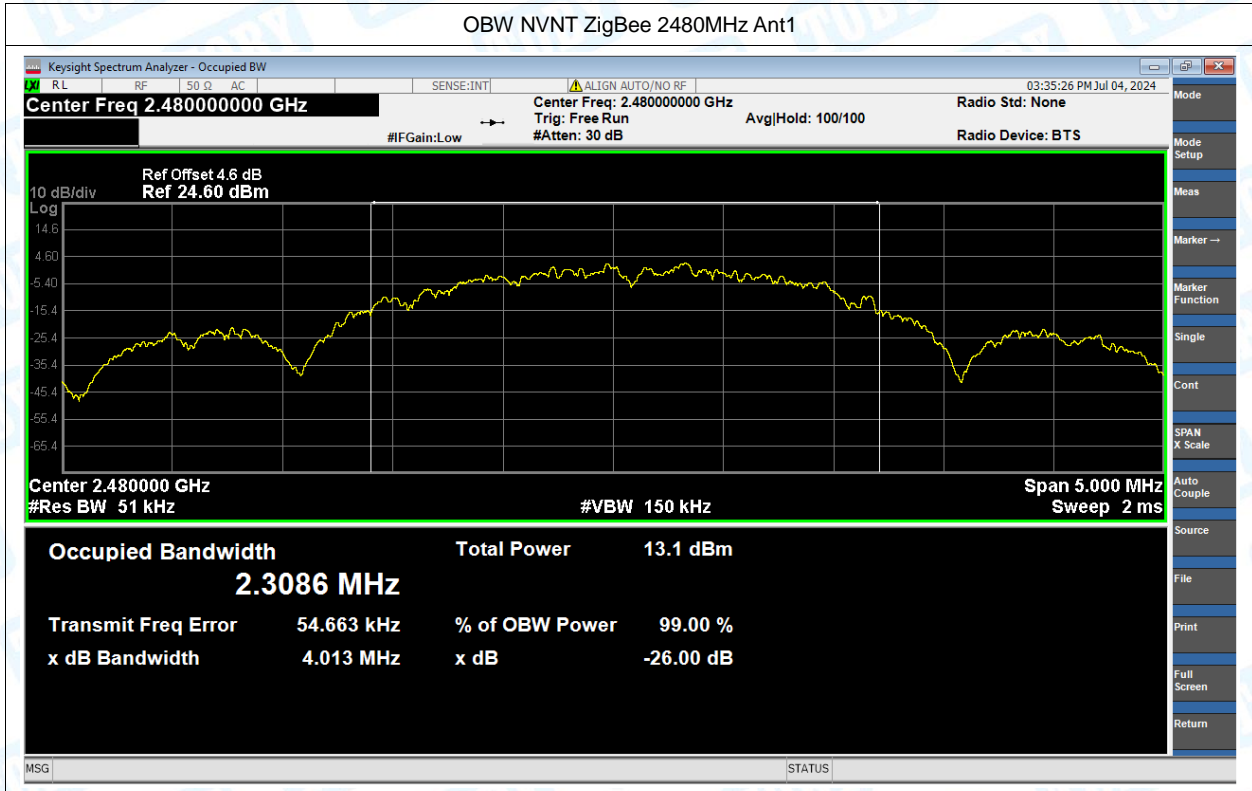




## 5. Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm/3KHz)	Limit (dBm/3KHz)	Verdict
NVNT	ZigBee	2405	Ant1	-7.396	8	Pass
NVNT	ZigBee	2440	Ant1	-7.074	8	Pass
NVNT	ZigBee	2480	Ant1	-7.232	8	Pass

Test Graphs


PSD NVNT ZigBee 2405MHz Ant1

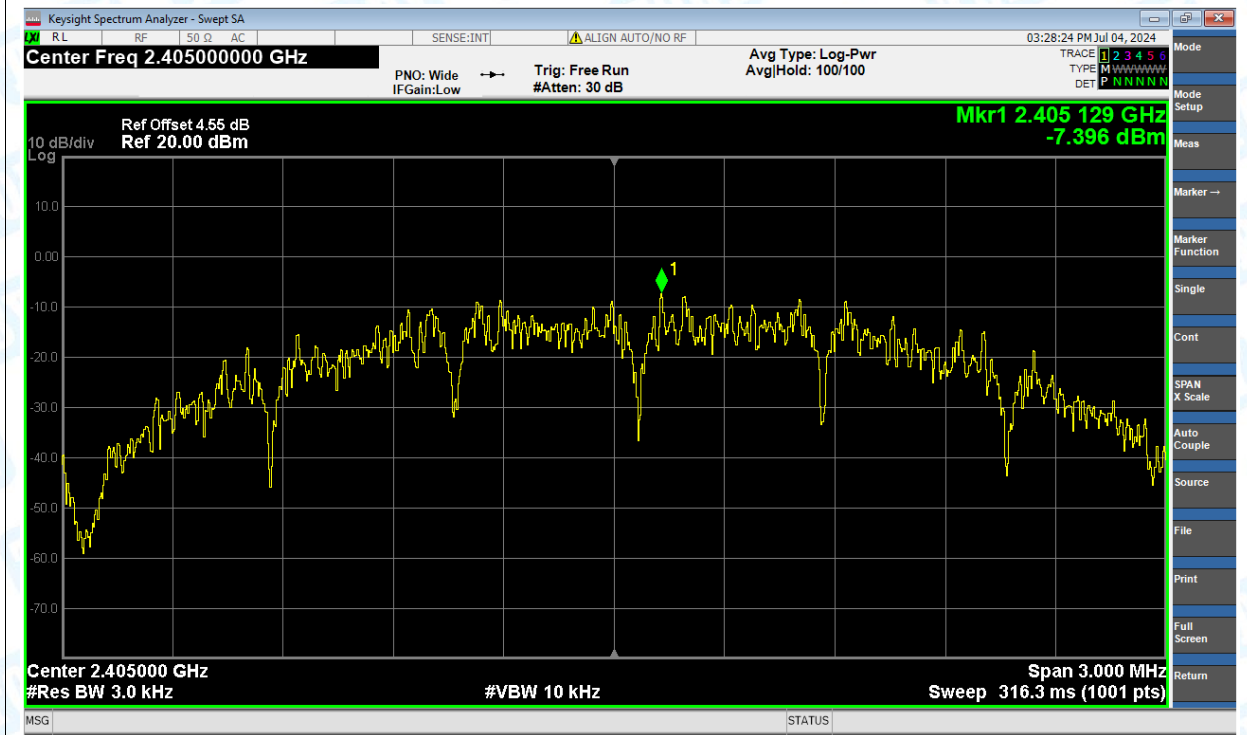

PSD NVNT ZigBee 2440MHz Ant1





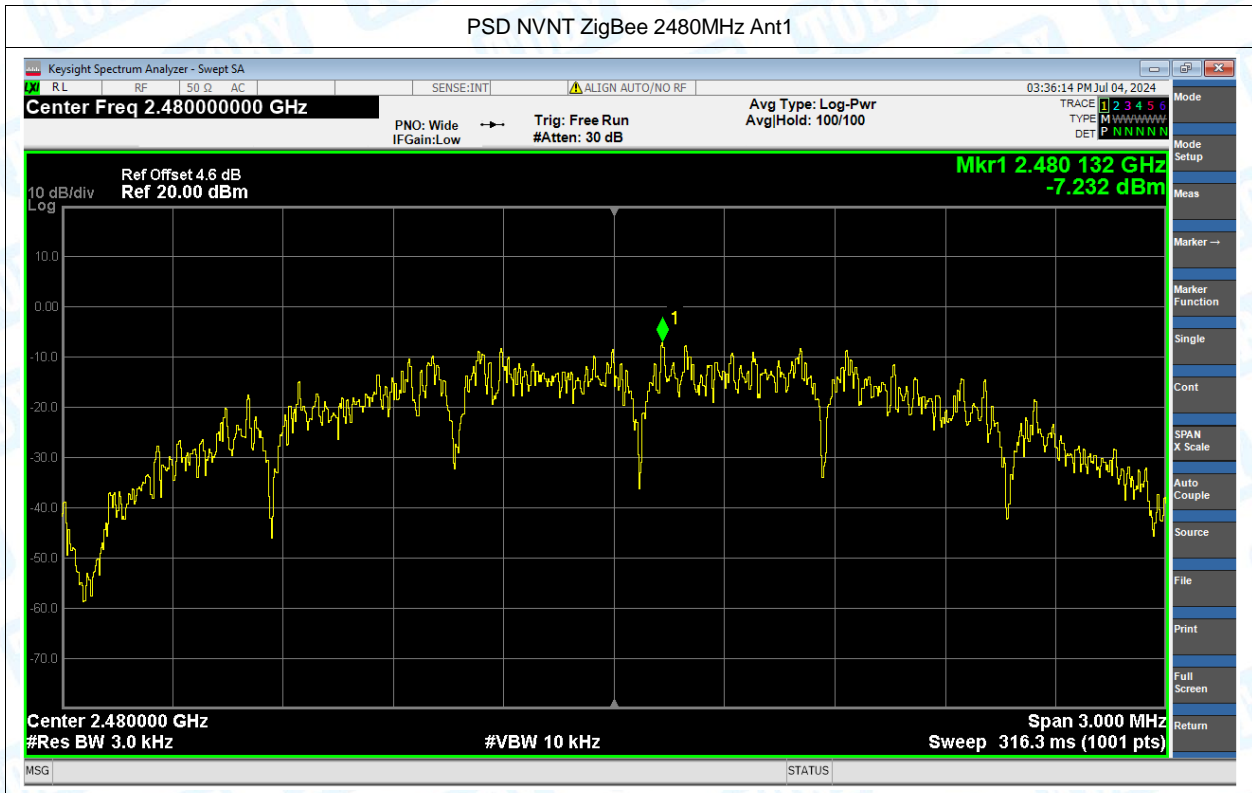

## 6. Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	ZigBee	2405	Ant1	-51.91	-20	Pass
NVNT	ZigBee	2480	Ant1	-37.11	-20	Pass




Test Graphs

Band Edge NVNT ZigBee 2405MHz Ant1 Ref




Band Edge NVNT ZigBee 2405MHz Ant1 Emission

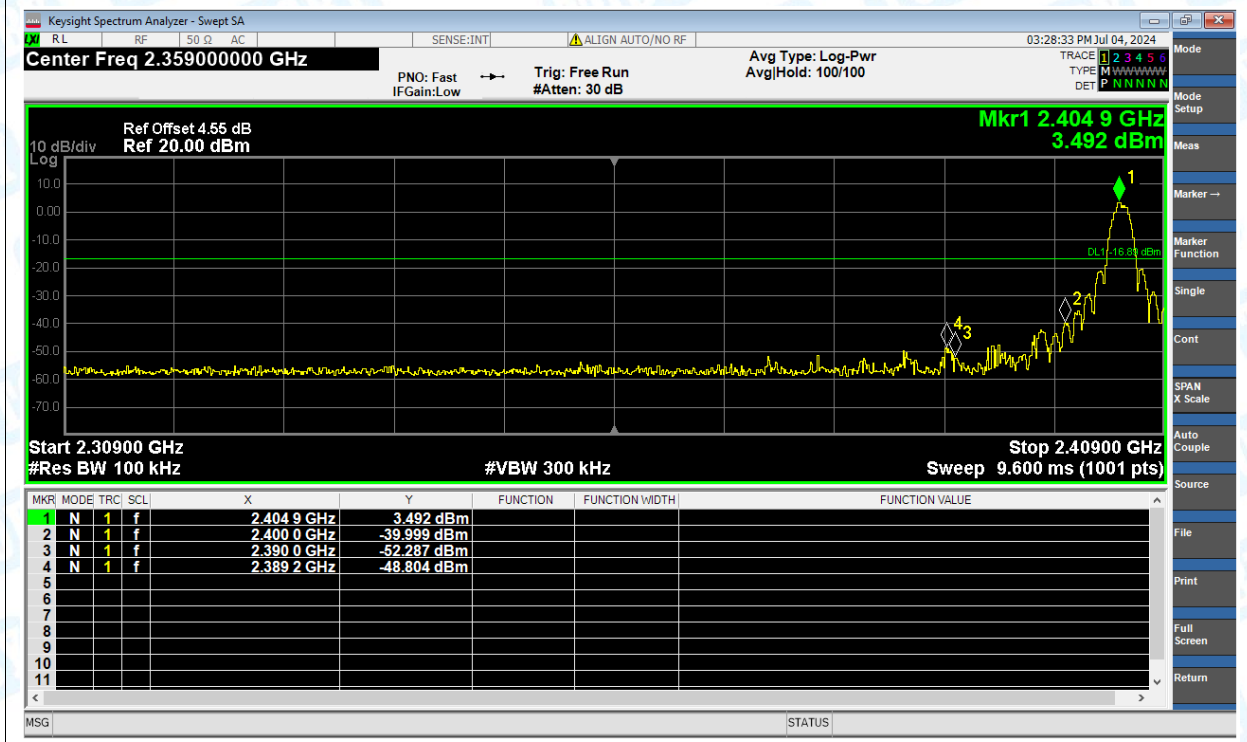

Band Edge NVNT ZigBee 2480MHz Ant1 Ref



Band Edge NVNT ZigBee 2480MHz Ant1 Emission

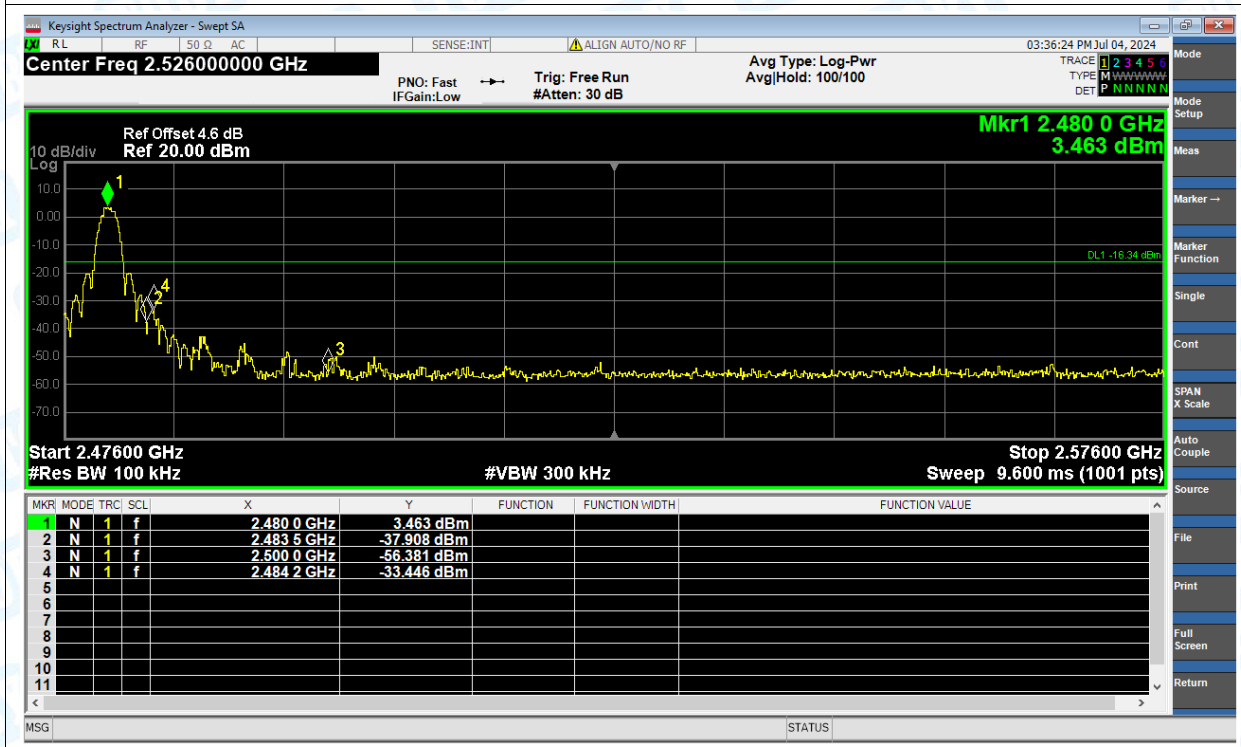




## 7. Conducted RF Spurious Emission


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	ZigBee	2405	Ant1	-42.61	-20	Pass
NVNT	ZigBee	2440	Ant1	-42.94	-20	Pass
NVNT	ZigBee	2480	Ant1	-43.09	-20	Pass

Test Graphs

Tx. Spurious NVNT ZigBee 2405MHz Ant1 Ref

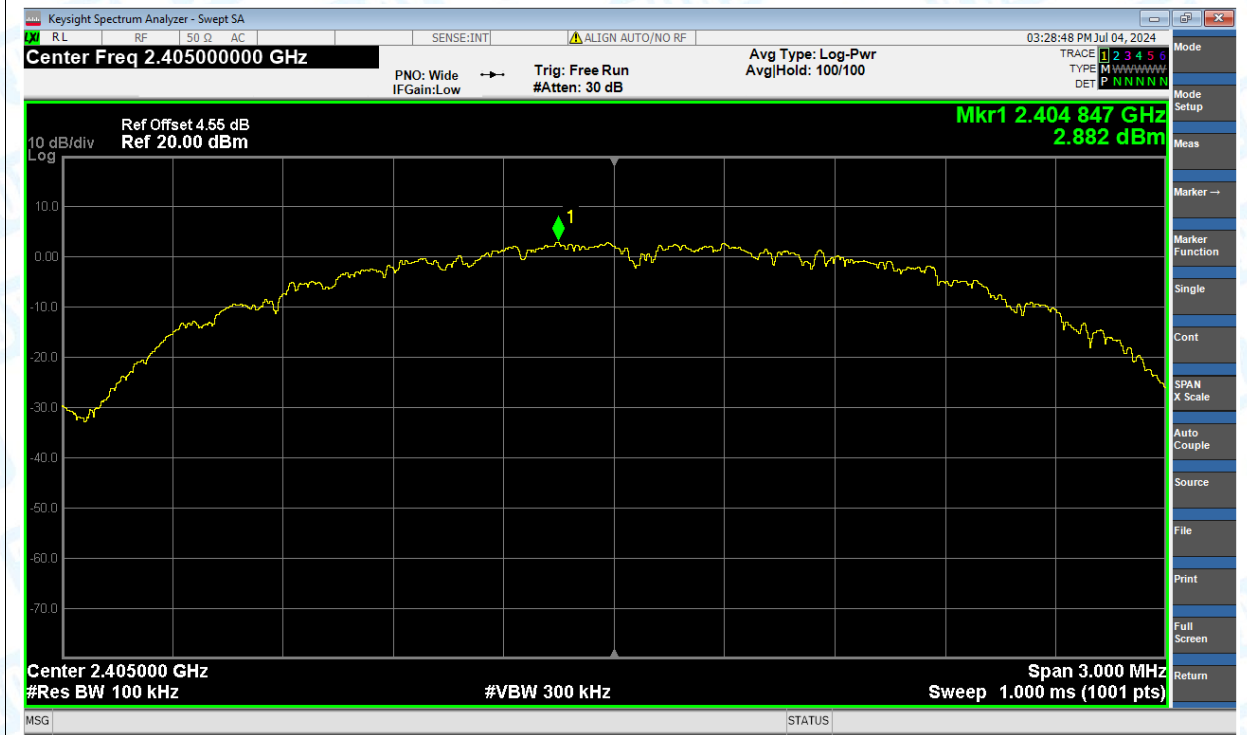


Tx. Spurious NVNT ZigBee 2405MHz Ant1 Emission

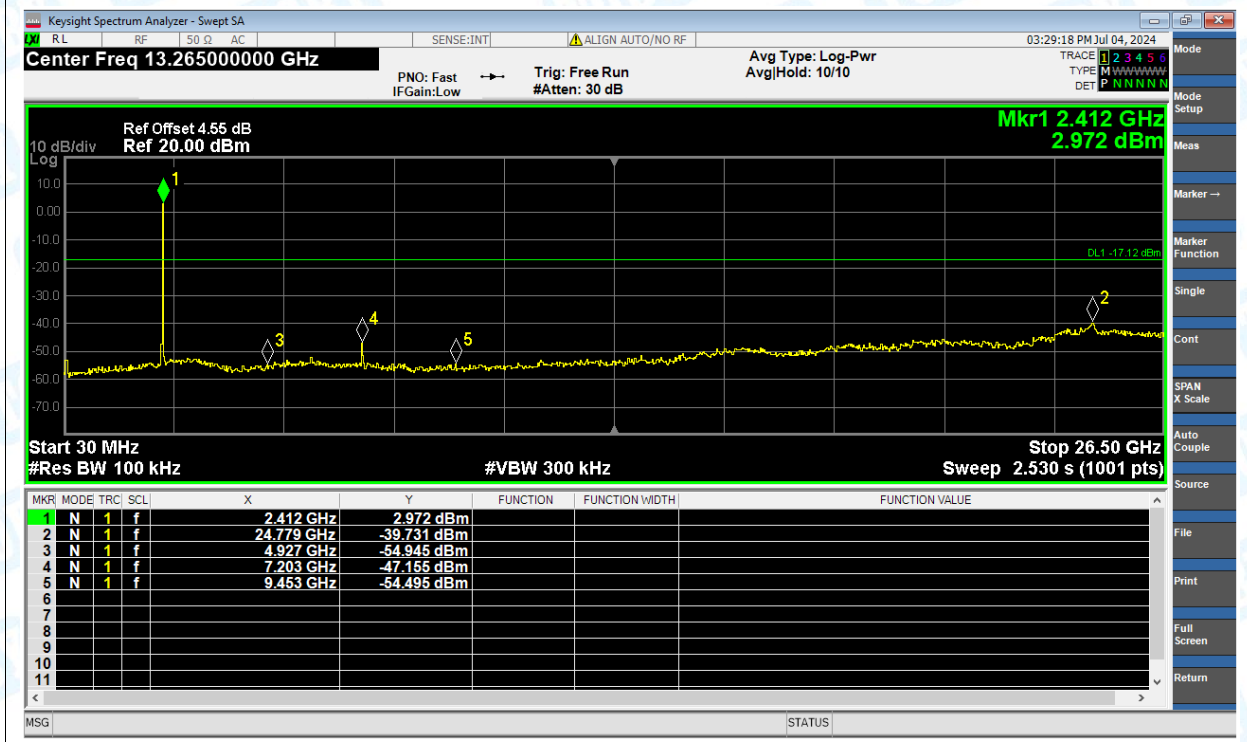





Tx. Spurious NVNT ZigBee 2440MHz Ant1 Ref

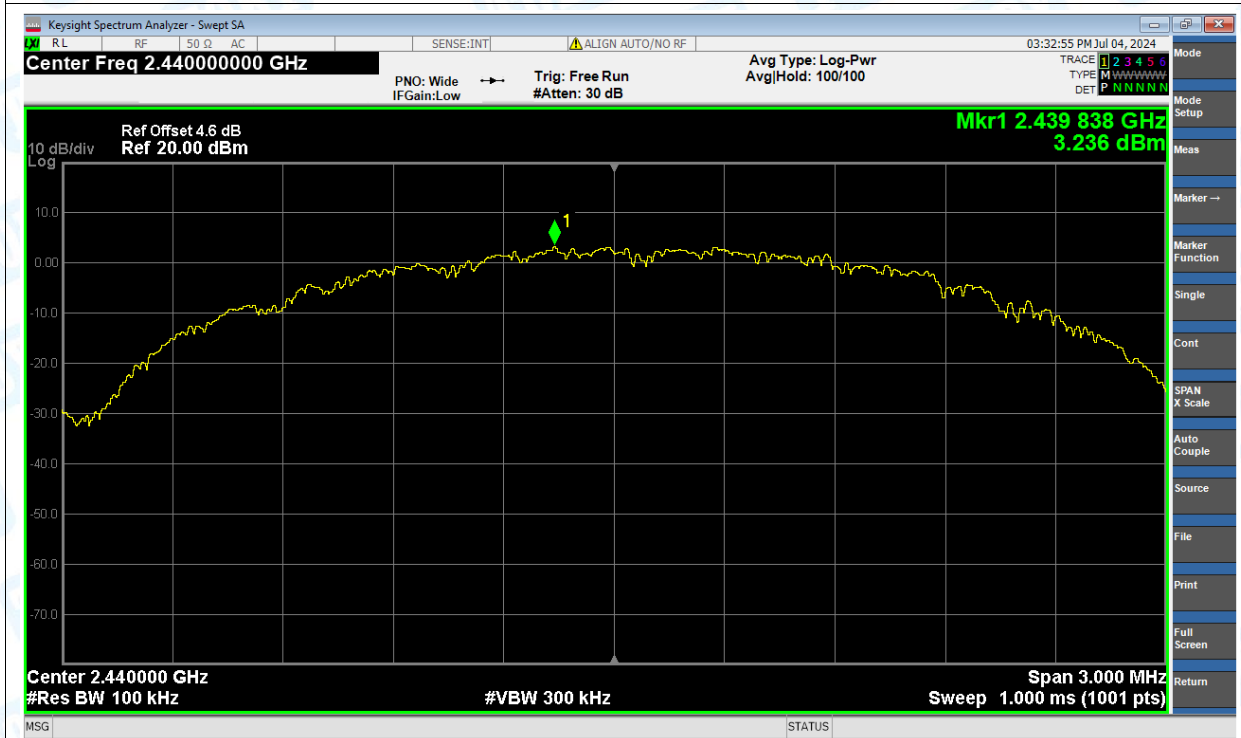


Tx. Spurious NVNT ZigBee 2440MHz Ant1 Emission

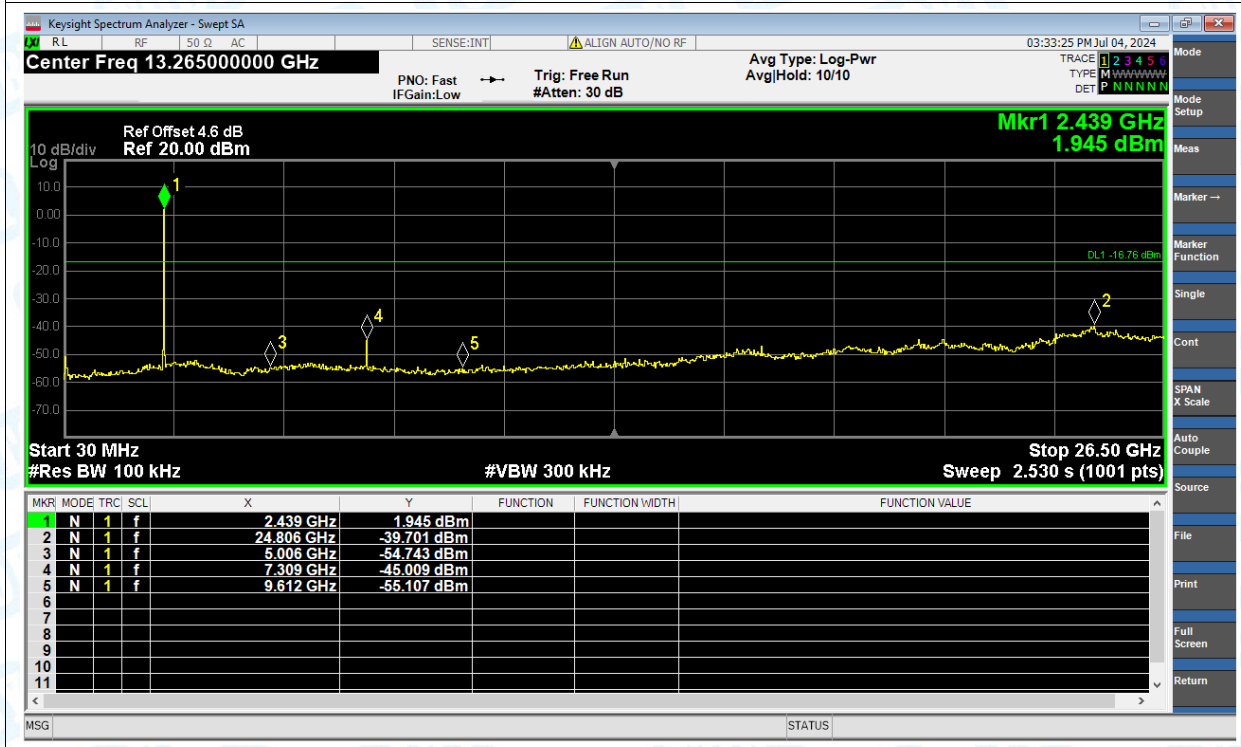

Tx. Spurious NVNT ZigBee 2480MHz Ant1 Ref

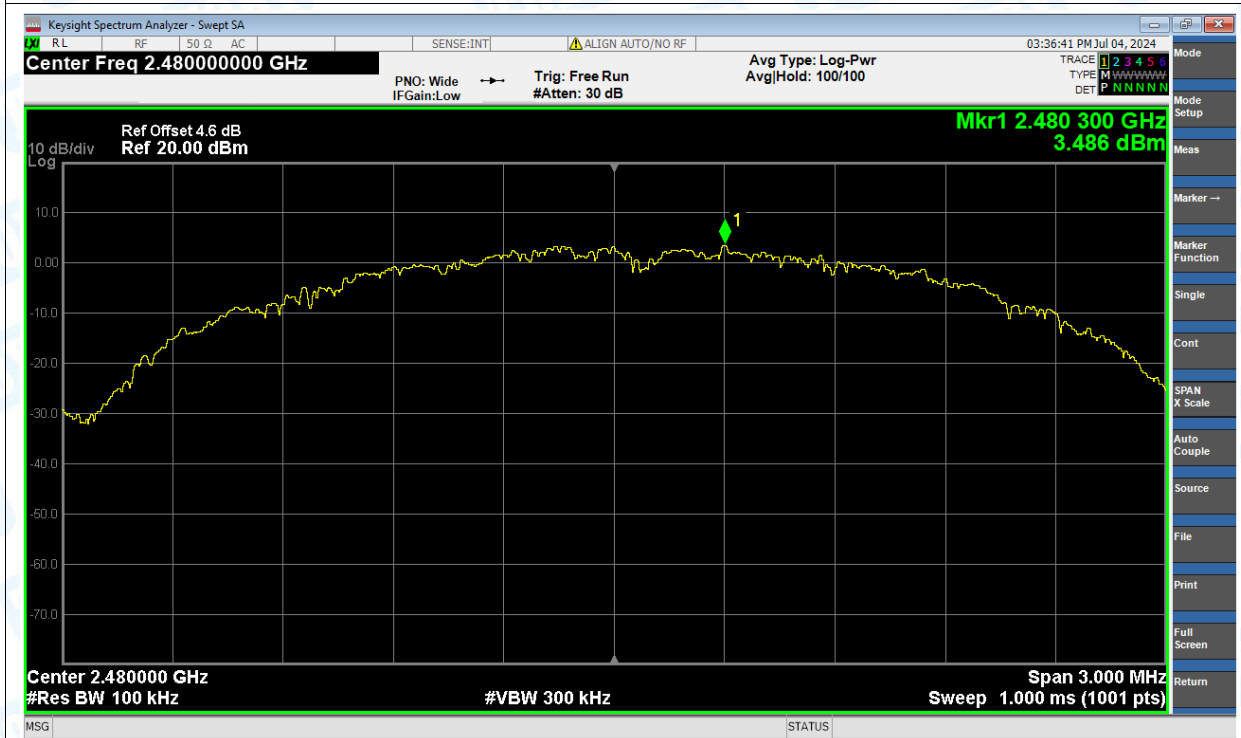

Tx. Spurious NVNT ZigBee 2480MHz Ant1 Emission

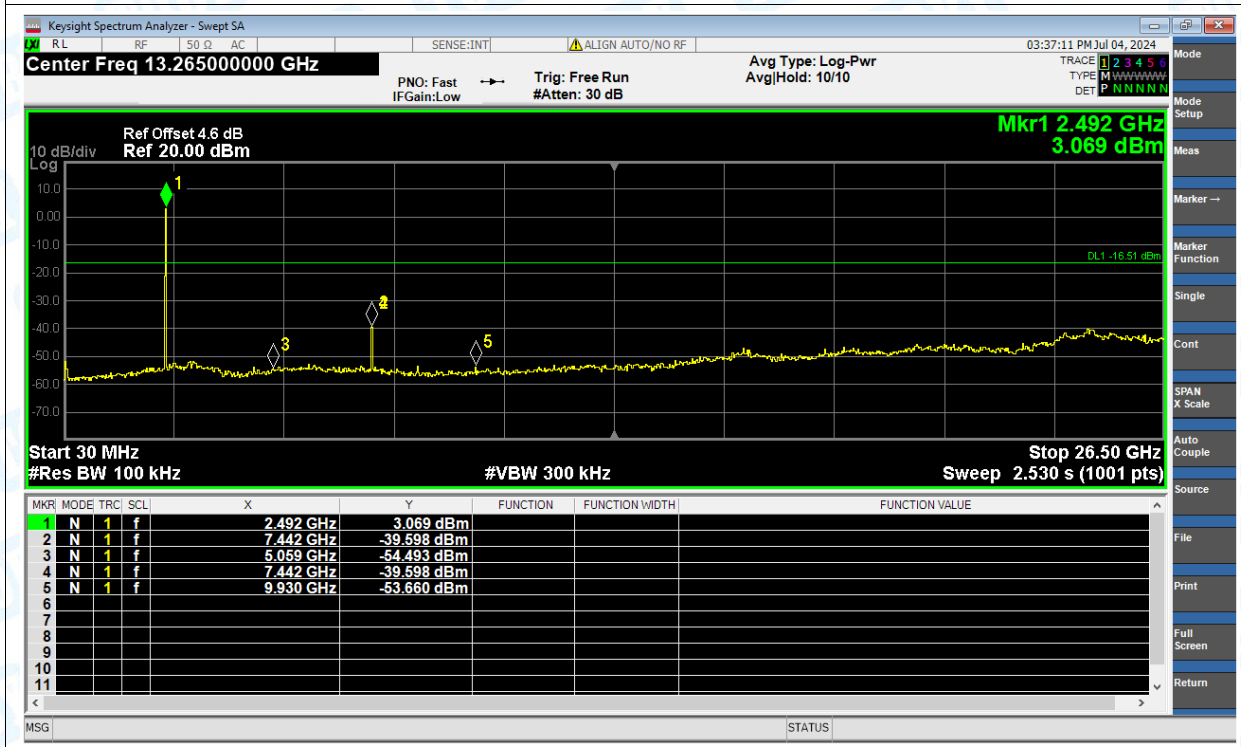




## 8. Restrict Band


Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	Duty Factor (dB)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	ZigBee	2405	Ant1	2310	-48.21	2	-	49.05	Peak	74	Pass
NVNT	ZigBee	2405	Ant1	2310	-64.11	2	4.82	37.97	Average	54	Pass
NVNT	ZigBee	2405	Ant1	2386.131	-34.9	2	-	62.36	Peak	74	Pass
NVNT	ZigBee	2405	Ant1	2386.329	-57.26	2	4.82	44.82	Average	54	Pass
NVNT	ZigBee	2405	Ant1	2390	-55.23	2	-	42.03	Peak	74	Pass
NVNT	ZigBee	2405	Ant1	2390	-63.84	2	4.82	38.24	Average	54	Pass
NVNT	ZigBee	2480	Ant1	2483.5	-44.94	2	-	52.32	Peak	74	Pass
NVNT	ZigBee	2480	Ant1	2483.5	-50.86	2	4.87	51.27	Average	54	Pass
NVNT	ZigBee	2480	Ant1	2483.536	-44.23	2	-	53.03	Peak	74	Pass
NVNT	ZigBee	2480	Ant1	2483.512	-50.86	2	4.87	51.27	Average	54	Pass
NVNT	ZigBee	2480	Ant1	2500	-56.48	2	-	40.78	Peak	74	Pass
NVNT	ZigBee	2480	Ant1	2500	-64.54	2	4.87	37.59	Average	54	Pass

Test Graphs

Restrict Band NVNT ZigBee 2405MHz Ant1 Peak

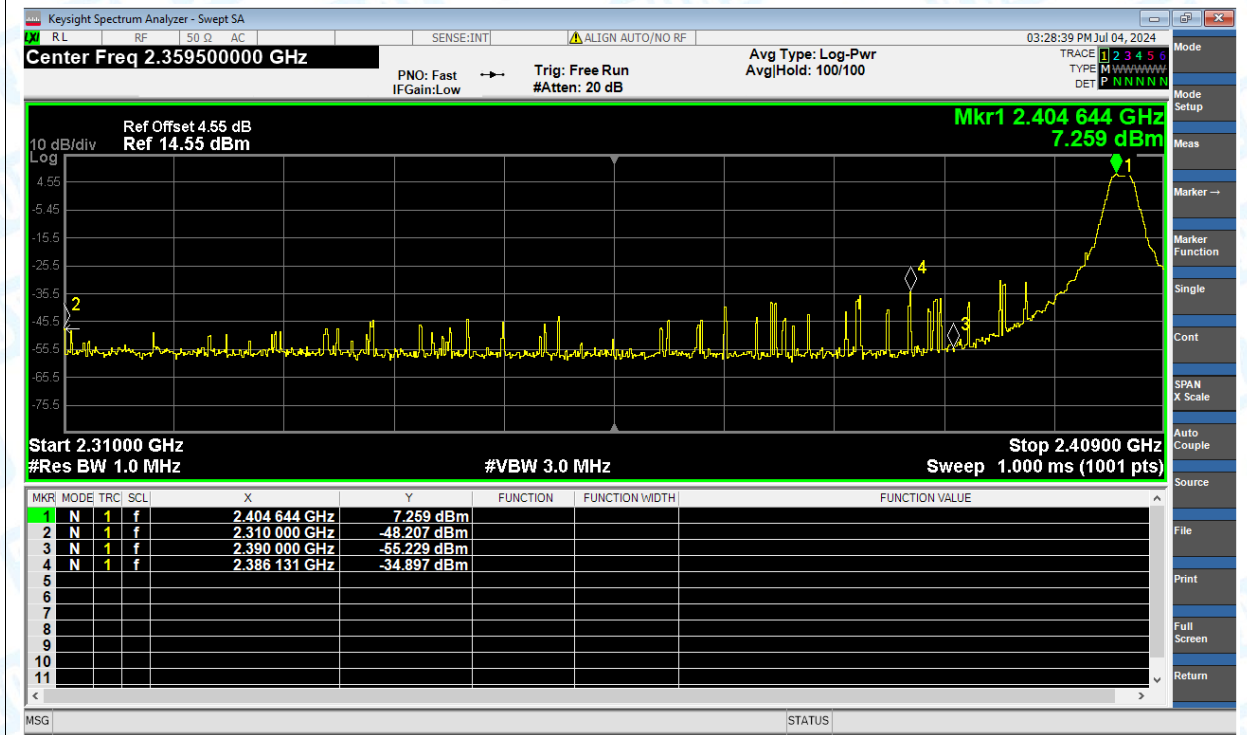


Restrict Band NVNT ZigBee 2405MHz Ant1 Average

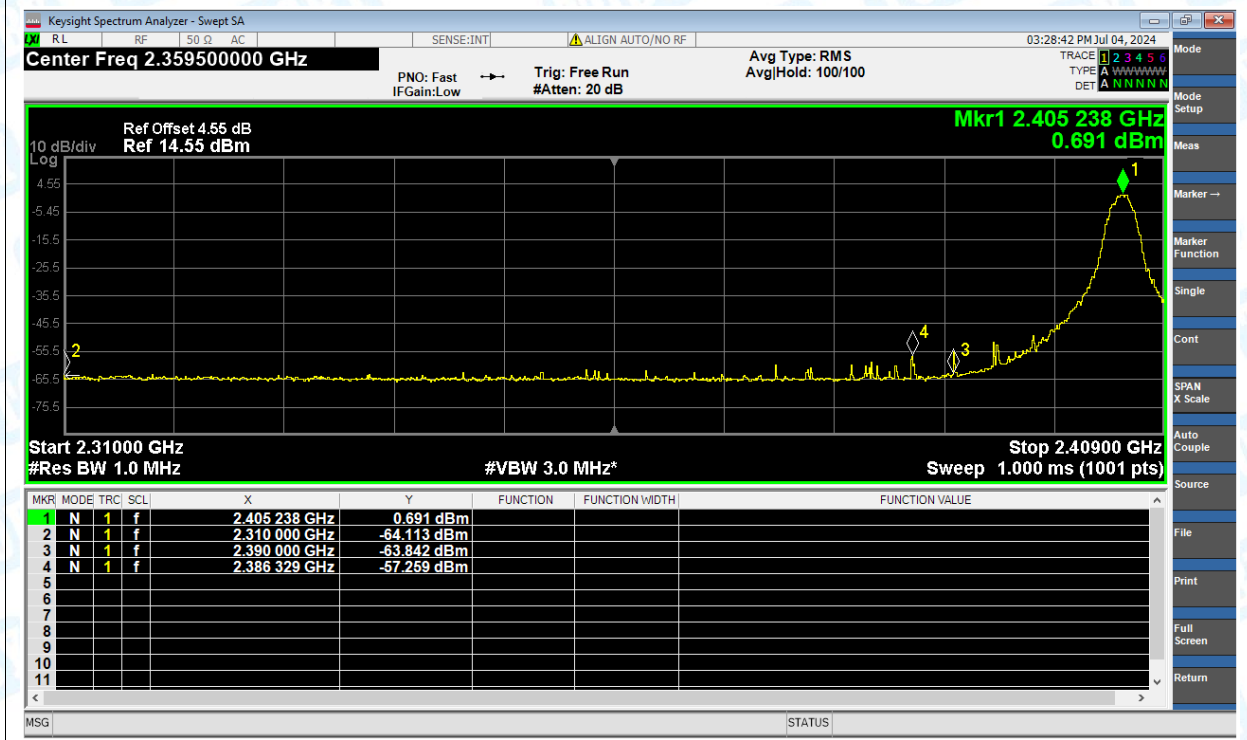



Restrict Band NVNT ZigBee 2480MHz Ant1 Peak

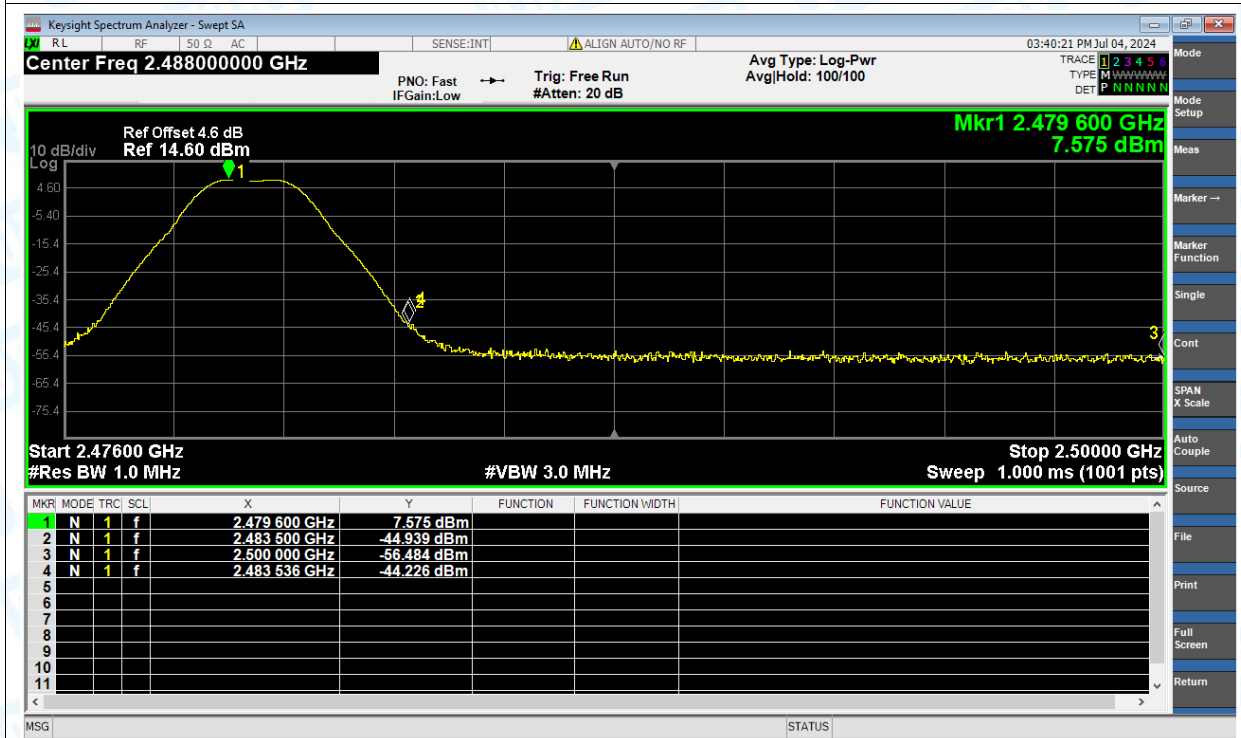

Restrict Band NVNT ZigBee 2480MHz Ant1 Average



----END OF THE REPORT----