



1. aim

For the Production from shenzhen maya communication equipment co., LTD. That mobile communication terminal antenna product specifications and test methods for specification, avoid the test conditions, the error caused by different methods

2. Antenna debug design requirement frequency band.

| frequency | frequency band |
|-----------|----------------|
| WIFI | WIFI2. 4G |
| other | / |

3. Product cell phone and sky chart.



The antenna



4.electrical


4.1 Test method description and data.

| Device name | use |
|--------------------------------------|---|
| Vector Network Analyzer | S11/Impedance/ Passive Test |
| Agilent 8960 SP6010 R&S CMU200 | GSM, GPRS, EDGE, CDMA2000, 1xev-do, td-scdma, WCDMA, HSDPA mobile phone mobile communication equipment test. |
| R&S CMW500 MT8820C | Including td-scdma, WCDMA, HSDPA, LTE, WIFI, GPS mobile phone mobile communication equipment test. |
| SP9500E | Contains 5G, SA, NSA |
| Agilent E4438C | Test active GPS |
| MVG Chamber | Passive Test / OTA active Test / Efficiency/Gain |

4.2 Passive Test Report

Test equipment: network analyzer.

Test method: with a 50 ohm CABLE CABLE from the instrument test port is derived, using the calibration after a calibration mechanism of SMA connector, connecting hand records related to the frequency points corresponding return loss and standing wave ratio data.

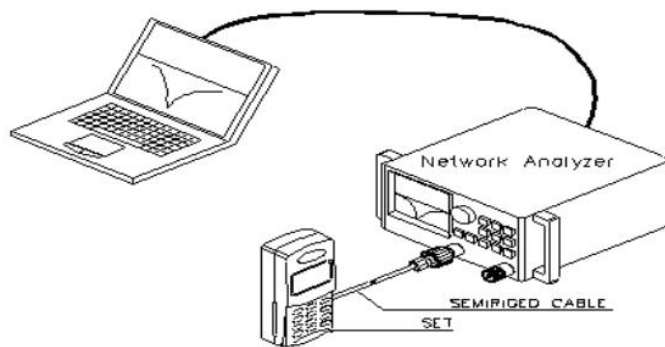

测试示意图



4.3 Active Test Report


TRP/TIS

From testing tools, measuring, network analyzer, full waves far field ETS, French MVG SG24LT (Satmio) near field 3 d microwave dark room, the high precision positioning system and its controller and the computer with automatic test procedure test environment: the temperature of 22 °C + 3 °C, humidity 60% plus or minus 60% test methods: Using EST or 24 It Satimo system software Test method and calculation of TRP when tested TRP, DUT (Device Under Test) is in a state of maximum transmitted power, including three to choose channel Test, by positioning system control the location of the DUT, with 15 degrees for step length, measuring three dimensional space, the effective radiated power (EIRP) at various points through the average of the integral sphere, computation formula is as follows

$$TRP \cong \frac{\pi}{2NM} \sum_{i=1}^{N-1} \sum_{j=0}^{M-1} [EiRP_{\theta}(\theta_i, \phi_j) + EiRP(\theta_i, \phi_j)] \sin(\theta_i)$$

In TIS test, the DUT at the maximum transmission power of the state, including three to choose channel test, by controlling the location of the DUT, at 30 degrees for the step length, measuring the three dimensional space each point receiving sensitivity, the average of the sphere by integral calculation, calculation formula is as follows:

$$TIS \cong \frac{2NM}{\pi \sum_{i=1}^{N-1} \sum_{j=0}^{M-1} \left[\frac{1}{EIS_{\theta}(\theta_i, \phi_j)} + \frac{1}{EIS_{\phi}(\theta_i, \phi_j)} \right]} \sin(\theta_i)$$

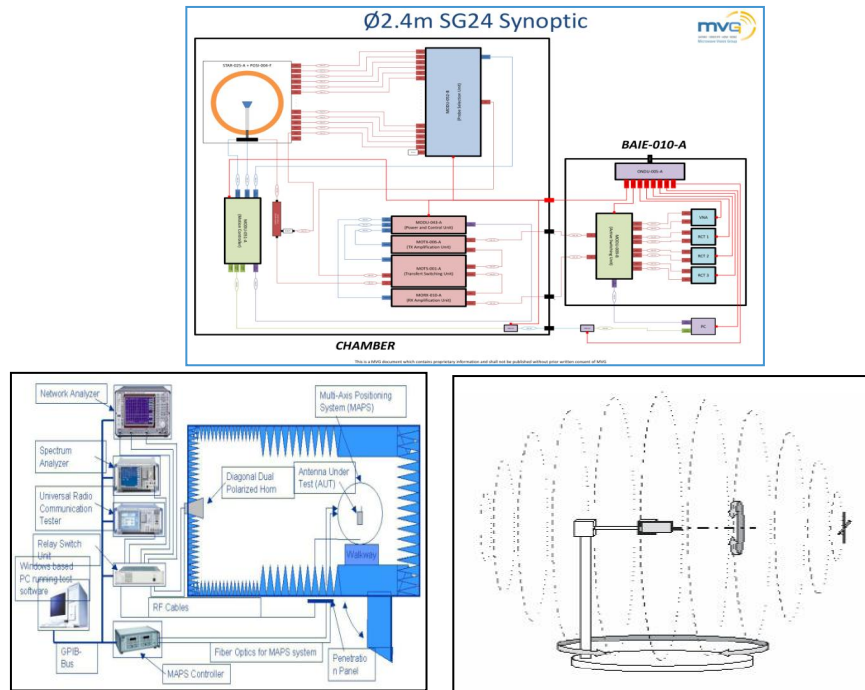




Model:E93GJ3N

4.4 Passive Test Report

VSWR

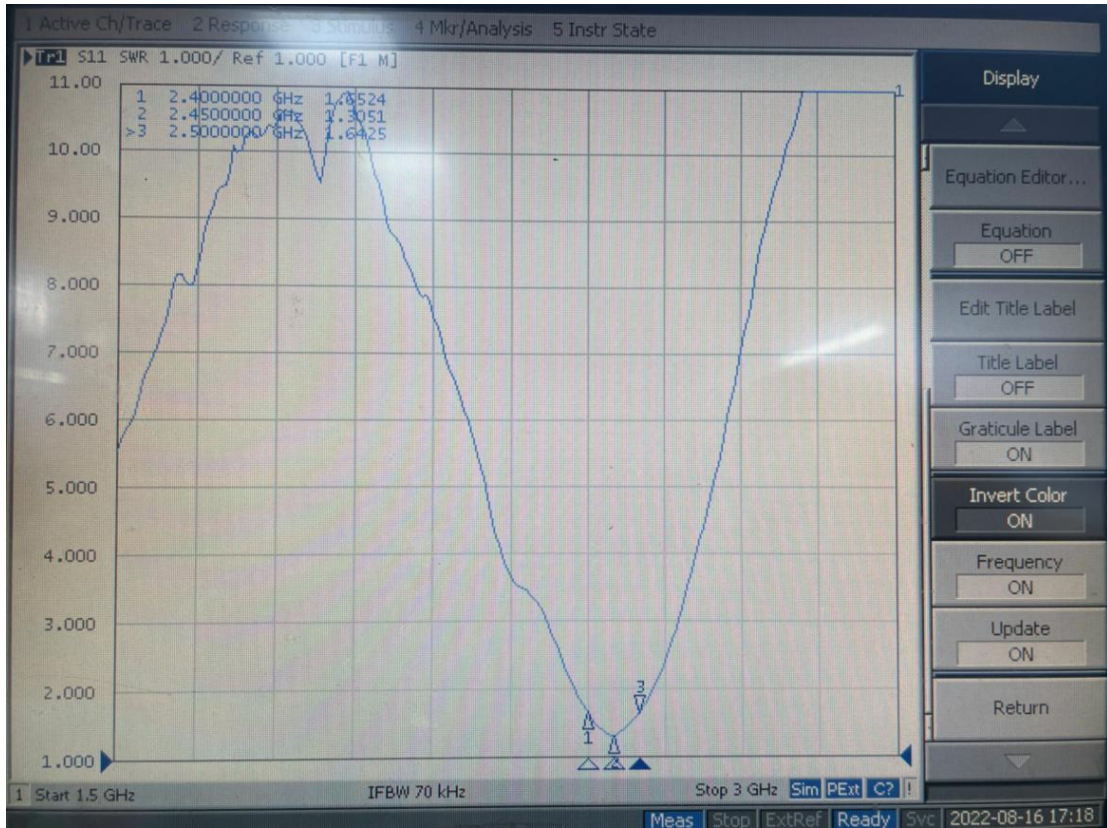



Efficiency gain

| Frequency | Efficiency | Gain . dB |
|------------|------------|-------------|
| 2400000000 | 44.42% | 1.771904906 |
| 2410000000 | 44.05% | 1.719654295 |
| 2420000000 | 43.50% | 1.991981885 |
| 2430000000 | 46.16% | 2.675060034 |
| 2440000000 | 46.93% | 2.735007485 |
| 2450000000 | 46.94% | 2.610048307 |
| 2460000000 | 47.68% | 2.836622442 |
| 2470000000 | 51.09% | 3.379107986 |
| 2480000000 | 53.10% | 3.439678404 |
| 2490000000 | 55.22% | 3.523689641 |
| 2500000000 | 58.50% | 3.86114974 |





Model:E93GJ3N

Directional pattern

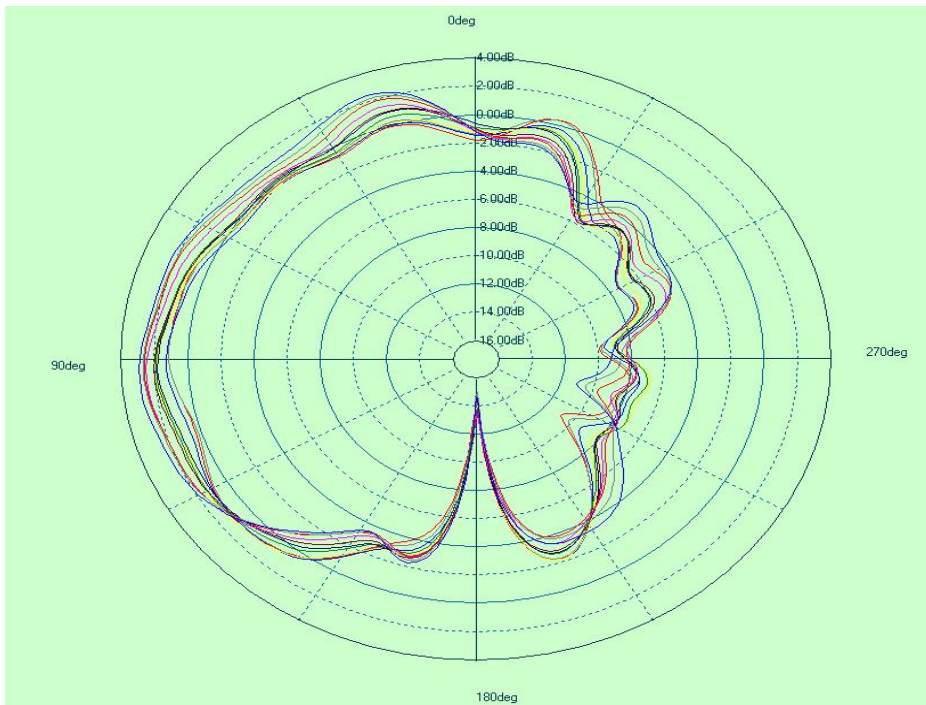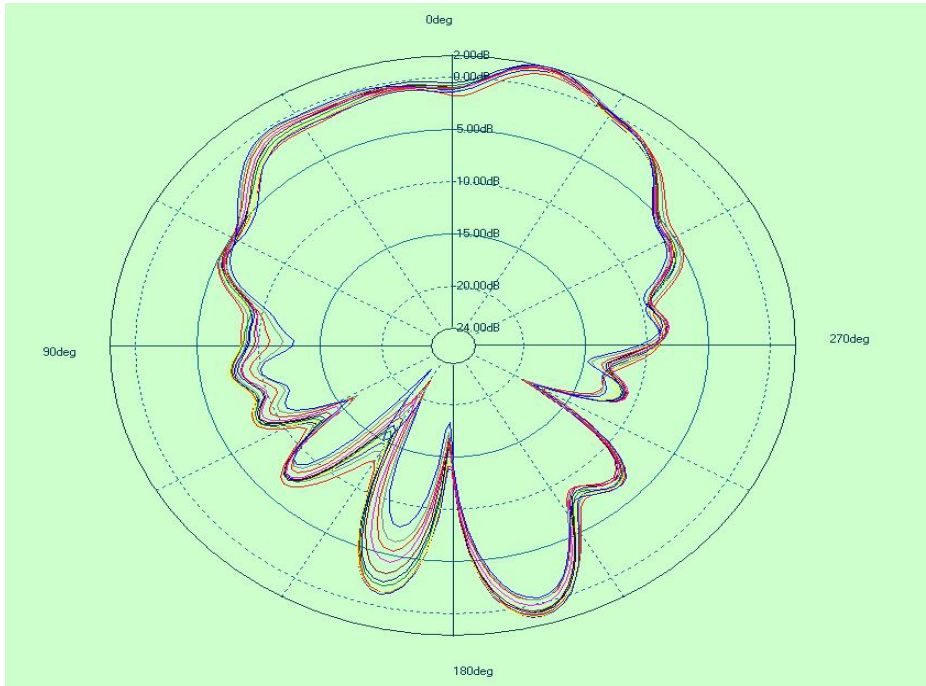



Model:E93GJ3N

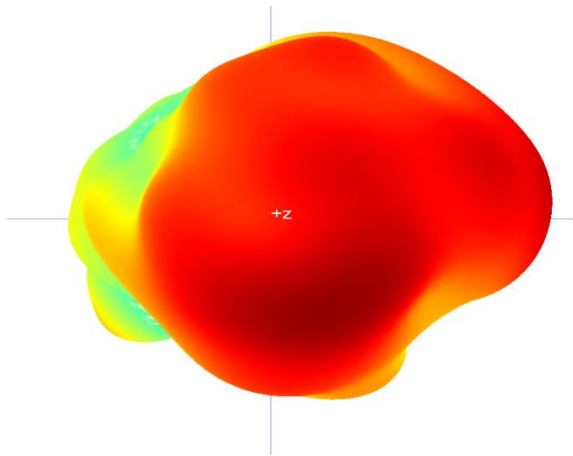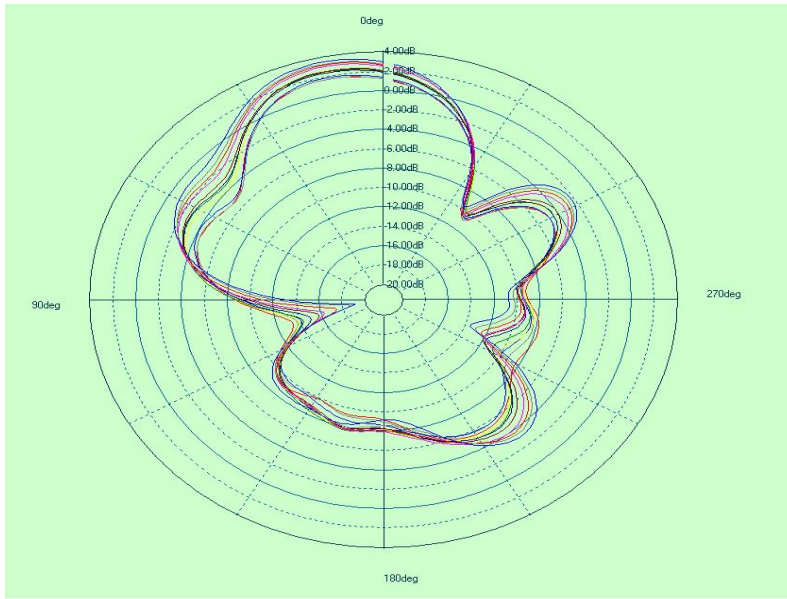


4.5 OTA TRP/TIS Test Report

| 自由空间 | BAND | WiFi_11B | | |
|------|---------|----------|-------|--------|
| | CHANNAL | 1 | 6 | 11 |
| | TRP | 15.46 | 16.18 | 16.11 |
| | TIS | - | - | -80.01 |



5. Matching circuit description

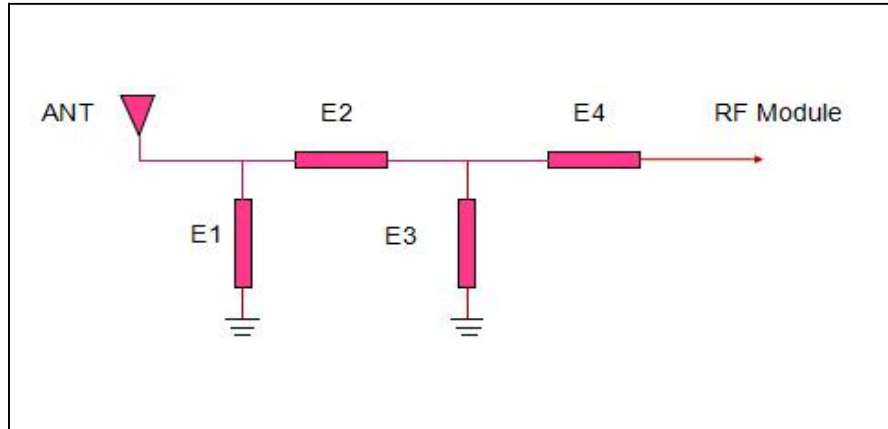


Note: we do not debug the antenna matching circuit.

6.Environmental treatment

天线装配位置图

黄圈内线材需固定好，需远离，避免干扰天线
同轴线摆在灯板下沿壳内边缘放置

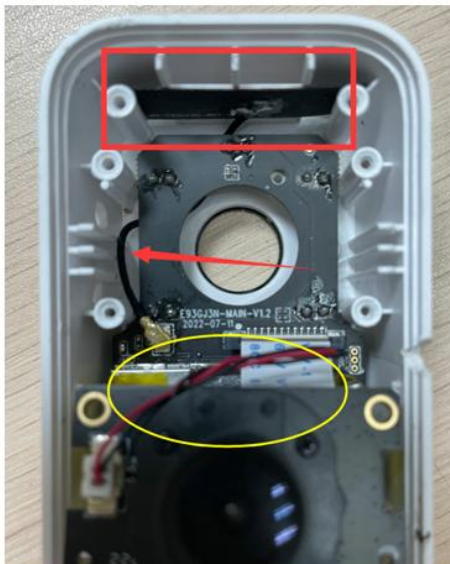

Antenna Assembly position diagram

The wire inside the yellow coil should be fixed well and away from the antenna to avoid interference

The coaxial line is arranged under the lamp plate along the inner edge of the shell



8.Warning Sign

1. The section on performance and structure validation

★Please confirm the appearance and performance of the product before you sign the acknowledgement.

★Please be sure to provide the final mass production trial production machine to our company or take back our company verification before mass production

★As the product of this acknowledgement is a highly sensitive object, please be sure to keep the testing machine for follow-up

★As this product is a custom-made object, the use of the targeted, customers in material replacement or for non-designated items, please be sure to change the material or non-designated items of the machine sent to our company to verify the radio-frequency performance, otherwise, may cause the use state and the design state inconsistent serious hidden danger, to our company sealed debugging sample function confirmation, ensure our company debugging sample function completely normal, prevent function abnormal to the antenna performance error caused by the antenna performance

2. About product storage

★As this product has printing ink on the surface, adhesive on the back and electroplate, please make sure the temperature is between 23 ° c-27 ° C and the relative humidity is below 60% during storage or transportation, no strong acid, no sulfur, no oxygen storage or transport environment

★As the product back glue on the environment requirements are more stringent, please customers must be received after the product, in the product quality guarantee period to ensure the reliability of the product

3. Tips for using the product

★Due to the special structure of this product, please use this product must be in full contact with the pasted objects, and pasted objects must not be residual chemicals (release agent, etc.) or as far as possible do not use the raw materials with release agent, to ensure that the product is in good working condition, please clean the surface of the pasted article before using the product to ensure that there is no chemical residue on the surface of the pasted article

4. Statement of Quality Assurance for this product

★This product quality guarantee period is 12 months, if your use and storage environment to meet the above requirements, in the valid guarantee period of any quality problems, and determined that our products are abnormal, our company can provide free replacement services, after 12 months, our products provide life-long consultation and paid replacement services

★This product is a special custom device, please receive the product must within 3 working days of the product quantity confirmation