


# User's Manual

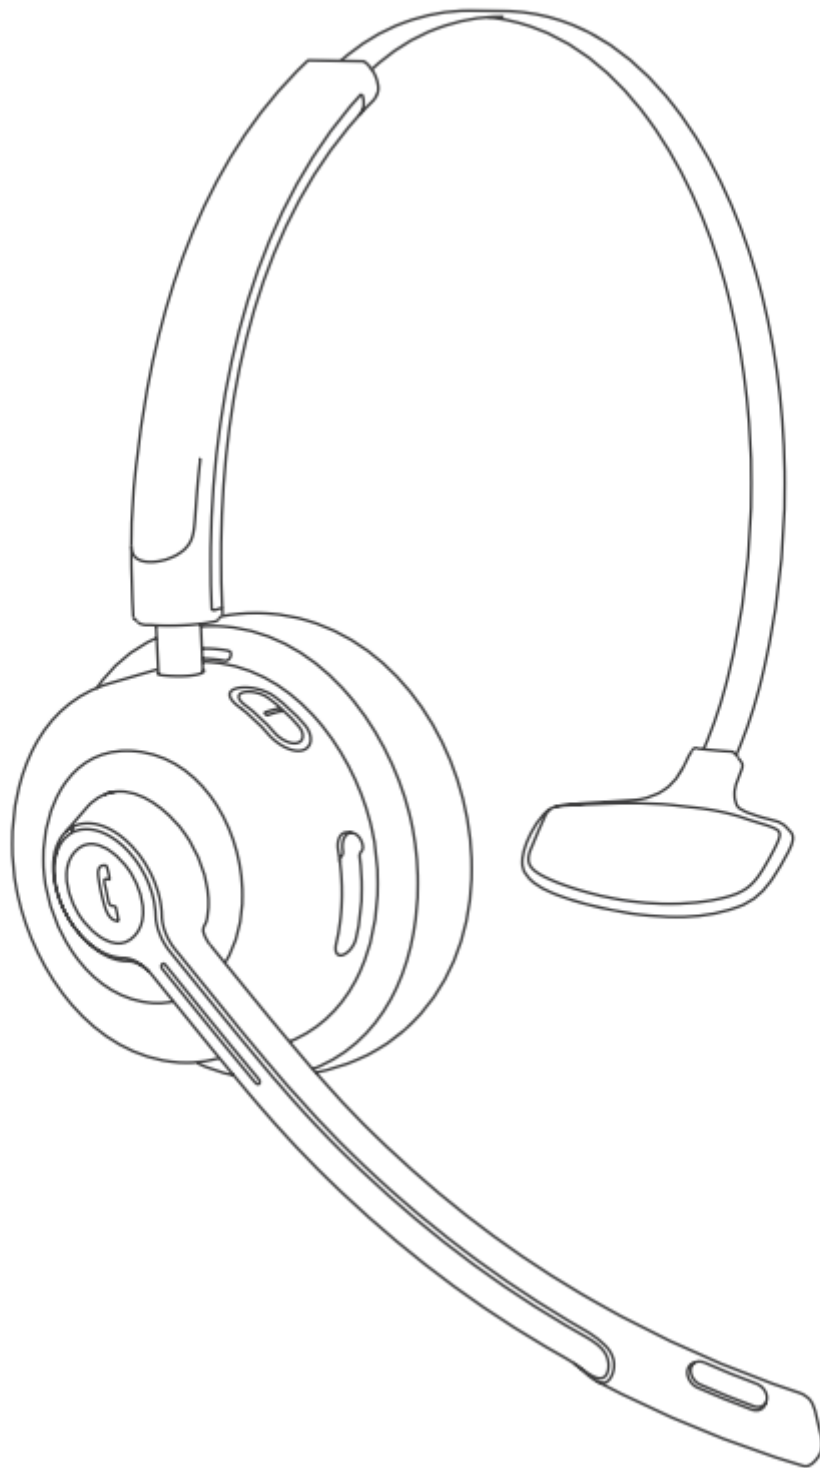


Model No: B092

Trademark:ANC

Product name: Wireless headset

# 1.Product illustration

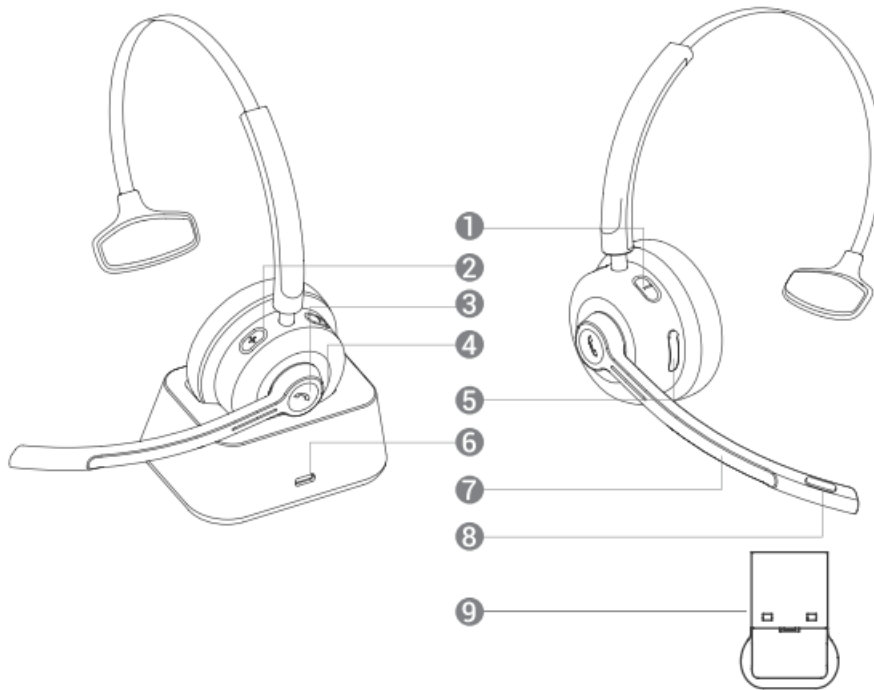

1. Volume -
2. Volume +
3. MFB button
4. LED Indicator
5. USB-C Charging Port (headset jack)
6. USB-C Charging Port (charging base)
7. MIC Bar
8. Mute button
9. USB Dongle

## 2.Important safety instruction

If used in the correct method, this design and production of this product can ensure your personal safety completely. However, any inappropriate use may lead to potential risk and danger of electric shock or fire hazard. Please read all the safety instructions before installing and using the product. In particular, attention shall be given to the following information:

1. It needs to be stored or used in the ambient temperature.
2. It shall not be placed in water or wet locations.
3. It can't be disposed randomly for it may cause environmental pollution.
4. Without approval, It shall not be disassembled or repaired.
5. The built-in lithium battery can't be disposed in the fire or other places to prevent causing fire hazards.
6. It shall be cleaned with dry cloth.
7. Whenever there is damage, it needs to be repaired by professional personnel.

## 3.Charging the battery

## 1.Charge the headset directly

Connect one end of the USB-C charging cable to a 5V power adapter (not included), and the other end to the headset. The red LED indicator will glow steadily during charging while it will change steady green after the headset is fully charged.

## 2.Charge the headset by the charging base

Connect one end of the USB-C charging cable to a 5V power adapter (not included), and the other end to the charging base. The red LED indicator will glow steadily during charging while it will change steady green after the headset is fully charged.

## 4.Buttons Functionality

Increase the volume	Short press + button
Decrease the volume	Short press - button
Next track	Press and hold + button for 2s
Previous track	Press and hold - button for 2s
Play / Pause	Short press MFB button
Answer / End a call	Short press MFB button
Reject an incoming call	Press and hold MFB button for 1s
Activate / Turn off Siri	Press and hold MFB button for 2s
Clear the pairing list	Press and hold the MFB and + buttons for 4s in power-on state simultaneously to clear the pairing list, and then the headset will automatically go back to pairing mode.

## **Mute Button**

1. In the conversation state, short press the mute button and there is a prompt voice "Mute on". Then the conversation will be muted.
2. In the mute state, short press the mute button and there is a prompt voice "Mute off". Then the conversation will be restored to normal.

<b>Feature</b>	<b>Device Status</b>	<b>Operation</b>	<b>Details</b>
Power on	Power off	Press and hold the MFB button for 2s.	There is a prompt voice "power on", the green LED indicator will glow steadily for 2s.
Power off	Power on	Press and hold the MFB button for 4s.	There is a prompt voice "power off", the red LED indicator will flash for 1s and then turn off.
Pairing & Connection.	Press and hold the MFB button for 4s until the green LED indicator flashes, and then the headset will automatically enter Bluetooth pairing mode. The red/green indicator lights will flash alternately. Open the Bluetooth menu on the phone and refresh the Bluetooth device list, then select the audio device named "Tribit CallElite 81" to begin pairing.		
Volume Up	Calling, playing music	Short press the "+" button	Voice "Di" when maximum volume & "Di" tone when volume over 85 dB
Volume Down	Calling, playing music	Short press the "-" button	Voice "Du" when minimum volume
Next track	Playing music	Long press the "+" button	The green LED indicator will always on
Previous track	Playing music	Long press the "-" button	The green LED indicator will always on
Pause	Music Play	Short press the MFB button	The green LED indicator will always on
Play	Music Pause	Short press the MFB button	The green LED indicator will always on
Answer the call	Incoming call	Short press the MFB button	The red LED indicator will flash interval 200mS
Reject the call	Incoming call	Press and hold the MFB button for 1s	The red LED indicator will flash interval 200mS, after rejected the call, the green light will always on.
End the call	Calling	Short press the MFB button	The green LED indicator will always on
Re-dial for end phone number.	Standby	Double click the MFB button	The red LED indicator will flash interval 200mS
Turn on Siri	Standby	Press and hold the MFB button for 2s	The green LED indicator will always on
Voice transfer	Calling	Press and hold the MFB	The red LED indicator will always on

		button for 2s	
Three-way call	<p>When calling, the third call comes in, click the MFB button to hold the current call and answer the third call;Then click the MFB button to switch between two calls.Double click the MFB button to hang up the current call.Long press the MFB button for 2s to reject the call when the third call comes in.</p> <p>The red LED indicator will flash interval 200mS</p>		

## 5. Technical Data Sheet

Type	Feature	Description or Detail
Bluetooth	Version	5.1
	Pair name	Tribit CallElite 81
	Operated distance	Over 10m outdoor
	Transmission Range(Hz)	2402-2480mHz
	Profile	HSP1.2、 HFP1.6、 A2DP1.2、 AVRCP1.4
	Decode	SBC、 AAC、 apt-X
	RF launch	Class II
	Receive Sensitivity	≤-83dBm
	Compatibility	IOS/Android/windows
	Bluetooth solution	QCC3020
Mic	Microphone Unit	2718
	direction	Omnidirectional
	Sensitivity/S.P.L.	-42dB±1
	Impedance	2.2KΩ
	Frequency Response	100- 10KHz
	Operating voltage	1.5-3.6V

Speaker	Diameter	30mm
	Frequency Response	20 - 20,000Hz+10/-10dB
	Impedance	32Ω±15%
	Sensitivity/S.P.L.	121dB ± 3dB ( 1KHz)
	Rated Power	25mw
Battery	Type	Chargeable Li-ion Battery

	Capacity	400 mAh
	Work time	22 hours
	Charge time	1.5hours
	Input	5V,1A
Charge cable	Plug	Type C-USB
	Length	80mm
Dongle adapter	Weight	6g
	Diameter	25.9*14.58*8.5mm

## 6.FCC Statement

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- 1) Reorient or relocate the receiving antenna.
- 2) Increase the separation between the equipment and receiver.
- 3) Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- 4) Consult the dealer or an experienced radio/TV technician for help important announcement

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.