



# AFC DUT TEST HARNESS REPORT

**FCC ID** : Z8H89FT0068  
**Equipment** : ePMP 4600 6 GHz 4x4 Access Point  
**Brand Name** : Cambium Networks  
**Model Name** : ePMP 4600 6 GHz 4x4 Access Point  
**Model Number** : C060940P021A  
**Applicant** : Cambium Networks Inc.  
3800 Golf Road, Suite 360 Rolling Meadows, IL 60008, USA  
**Manufacturer** : Cambium Networks, Ltd.  
Ashburton, TQ13 7UP, UK  
**Standard** : 47 CFR FCC Part 15.407

The product was received on Sep. 21, 2023, and testing was started from Sep. 26, 2023 and completed on Sep. 27, 2023. We, Sporton International Inc. Hsinchu Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in AFC Device (AFC DUT) Compliance Test Plan Version 1.5 and shown compliance with the applicable technical standards.

The test results in this variant report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Hsinchu Laboratory, the test report shall not be reproduced except in full.

Approved by: Sam Chen

**Sporton International Inc. Hsinchu Laboratory**

No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)



## Table of Contents

<b>1</b>	<b>General Description .....</b>	<b>6</b>
1.1	Product Feature of Equipment Under Test .....	6
1.2	Table for Permissive Change .....	6
1.3	Accessories .....	6
1.4	Support Equipment .....	7
1.5	Applicable Standards .....	7
1.6	Testing Location .....	7
<b>2</b>	<b>Measurement Environment .....</b>	<b>8</b>
2.1	AFCD General Capabilities Declaration .....	8
2.2	Test Configuration .....	9
<b>3</b>	<b>Protocol Test Results .....</b>	<b>11</b>
3.1	Successful Registration and Spectrum Access Request .....	11
3.2	Unsuccessful Spectrum Access Request .....	13
3.3	Successful Spectrum Access Update .....	14
3.4	Unsuccessful Spectrum Access Update .....	16
3.5	Unsuccessful Server Validation .....	18
<b>4</b>	<b>Test Equipment and Calibration Data .....</b>	<b>19</b>
<b>5</b>	<b>Measurement Uncertainty .....</b>	<b>20</b>

Appendix A. Tools Report

Appendix B. DUT Spectrum Inquiry Request/Response Logs

Appendix C. RF Measurement Plots

Photographs of EUT v01



**History of this test report**

<b>Report No.</b>	<b>Version</b>	<b>Description</b>	<b>Issued Date</b>
F3133141-04	01	Initial issue of report	Mar. 08, 2024
F3133141-04	02	Revising the model name to "Force 4625" from "F4625" for WLAN module in section 1.4.	Mar. 12, 2024



### Summary of Test Result

Report Clause	Ref Std. Clause	Test Case Name	Result (PASS/FAIL)	Remark
<b>AFC capability - Inquired Frequency</b>				
<b>Test Group: Inquired Frequency - Always</b>				
3.1	3.1.4	CT_AFC_SP_AP_AFCDRSA31_Frequency_20MHz_10611_1	PASS	-
3.1	3.1.4	CT_AFC_SP_AP_AFCDRSA31_Frequency_40MHz_10612_1	PASS	-
3.1	3.1.4	CT_AFC_SP_AP_AFCDRSA31_Frequency_80MHz_10613_1	PASS	-
3.1	3.1.4	CT_AFC_SP_AP_AFCDRSA31_Frequency_160MHz_10614_1	PASS	-
3.2	3.2.4	CT_AFC_SP_AP_AFCDUSA32_Frequency_10615_1	PASS	-
3.3	3.3.4	CT_AFC_SP_AP_AFCDSAU33_Frequency_10616_1	PASS	-
3.4	3.4.4	CT_AFC_SP_AP_AFCDUAU34_Frequency_10617_1	PASS	-
<b>AFC capability - Inquired Channel</b>				
<b>Test Group: Inquired Channel - Always</b>				
3.1	3.1.4	CT_AFC_SP_AP_AFCDRSA31_Channel_20MHz_10618_1	N/A	-
3.1	3.1.4	CT_AFC_SP_AP_AFCDRSA31_Channel_40MHz_10619_1	N/A	-
3.1	3.1.4	CT_AFC_SP_AP_AFCDRSA31_Channel_80MHz_10620_1	N/A	-
3.1	3.1.4	CT_AFC_SP_AP_AFCDRSA31_Channel_160MHz_10621_1	N/A	-
3.2	3.2.4	CT_AFC_SP_AP_AFCDUSA32_Channel_10622_1	N/A	-
3.3	3.3.4	CT_AFC_SP_AP_AFCDSAU33_Channel_10623_1	N/A	-
3.4	3.4.4	CT_AFC_SP_AP_AFCDUAU34_Channel_10624_1	N/A	-
<b>AFC capability - Inquired Frequency &amp; Channel</b>				
<b>Test Group: Inquired Frequency and Channel - Always</b>				
3.1	3.1.4	CT_AFC_SP_AP_AFCDRSA31_FrequencyChannel_20MHz_10625_1	N/A	-
3.1	3.1.4	CT_AFC_SP_AP_AFCDRSA31_FrequencyChannel_40MHz_10626_1	N/A	-
3.1	3.1.4	CT_AFC_SP_AP_AFCDRSA31_FrequencyChannel_80MHz_10627_1	N/A	-
3.1	3.1.4	CT_AFC_SP_AP_AFCDRSA31_FrequencyChannel_160MHz_10628_1	N/A	-
3.2	3.2.4	CT_AFC_SP_AP_AFCDUSA32_FrequencyChannel_10629_1	N/A	-
3.3	3.3.4	CT_AFC_SP_AP_AFCDSAU33_FrequencyChannel_10630_1	N/A	-
3.4	3.4.4	CT_AFC_SP_AP_AFCDUAU34_FrequencyChannel_10631_1	N/A	-
<b>AFC capability - Server Validation – Mandatory</b>				
<b>Test Group: Server Validation - Always</b>				
3.5	3.5.4	CT_AFC_ServerValidation_AP_AFCDUSV35_NonMatchSAN_10632_1	PASS	-
3.5	3.5.4	CT_AFC_ServerValidation_AP_AFCDUSV35_DifferentRootCA_10633_1	PASS	-
3.5	3.5.4	CT_AFC_ServerValidation_AP_AFCDUSV35_MatchSuffixSAN_10634_1	PASS	-
3.5	3.5.4	CT_AFC_ServerValidation_AP_AFCDUSV35_ServerCertRevoked_10635_1	PASS	-
3.5	3.5.4	CT_AFC_ServerValidation_AP_AFCDUSV35_OCSPStaplingDisabled_10636_1	PASS	-
3.5	3.5.4	CT_AFC_ServerValidation_AP_AFCDUSV35_StapledOCSPRespExpired_10637_1	PASS	-
3.5	3.5.4	CT_AFC_ServerValidation_AP_AFCDUSV35_TLSCipherSuiteENULL_10638_1	PASS	-
3.5	3.5.4	CT_AFC_ServerValidation_AP_AFCDUSV35_NoRootCA_10639_1	PASS	-



**Conformity Assessment Condition:**

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturee who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the chapter "Measurement Uncertainty".

**Disclaimer:**

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

**Reviewed by: Sam Chen**

**Report Producer: Cathy Chiu**



# 1 General Description

## 1.1 Product Feature of Equipment Under Test

Product Feature of Equipment Under Test	
Power Type	From PoE
EUT Type	<input type="checkbox"/> Standard Power Access Point with Proxy <input checked="" type="checkbox"/> Standard Power Access Point without Proxy <input type="checkbox"/> Fixed Client with Proxy <input type="checkbox"/> Fixed Client without Proxy
Condition of EUT	<input type="checkbox"/> Indoor <input checked="" type="checkbox"/> Outdoor
Professional Installation	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
Firmware Version	U-Boot IPQ807x 2016.01gf0484e4(Sep 11 2023 - 17:04:29)
Software Version	5.6-RC8FCC
Hardware Version	6 GHz ePMP 4600 4x4 (ROW/FCC)
Proxy Firmware Version	N/A
Proxy Software Version	N/A
Proxy Hardware Version	N/A

Note: The above information was declared by manufacturer.

## 1.2 Table for Permissive Change

This product is an extension of original one reported under Sporton project number: 133141-02

Below is the table for the change of the product with respect to the original one.

Modifications	Performance Checking
Adding 6GHz (UNII 5, UNII 7) function for the device.	AFC DUT Test Harness

## 1.3 Accessories

Accessories
Wall Bracket*1



### 1.4 Support Equipment

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Notebook	DELL	E4300	N/A
B	Notebook	DELL	E4300	N/A
C	Notebook	DELL	E4300	N/A
D	GNSS Simulator	Orolia	GSG-63	N/A
E	Switch	Panasonic	Switch-S9GPWR	N/A
F	AC Adapter	Cambium Networks	NET-P30-56IN	N/A
G	WLAN module	Cambium Networks	Force 4625	Z8H89FT0075

### 1.5 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15.407

The following reference test guidance is not within the scope of accreditation of TAF.

- ♦ AFC Device (AFC DUT) Compliance Test Plan Version 1.5
- ♦ FCC KDB 987594 D05 v01r01

### 1.6 Testing Location

Testing Location Information
Test Lab. : Sporton International Inc. Hsinchu Laboratory Hsinchu      ADD: No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.) (TAF: 3787)    TEL: 886-3-656-9065                      FAX: 886-3-656-9085 Test site Designation No. TW3787 with FCC. Conformity Assessment Body Identifier (CABID) TW3787 with ISED.

Test Condition	Test Site No.	Test Engineer	Test Environment (°C / %)	Test Date
RF Conducted	TH01-CB	Jeff Wu	22.4~22.7 / 65~65	Sep. 26, 2023 ~ Sep. 27, 2023



## 2 Measurement Environment

Measurement Environment Information	
AFC DUT Test Harness version	2.0.65.148


### 2.1 AFCD General Capabilities Declaration

Item	Question	Vendor Response
1	AFC DUT Type	Standalone AP
2	Does the AFC DUT supports sending an Available Spectrum Inquiry Request based on the inquired Frequency Range field?	Yes
3	Does the AFC DUT supports sending an Available Spectrum Inquiry Request based on the inquired Channels fields?	No
4	If the Answer to Items 2 and 3 is "Yes", what is AFC DUT's default inquiry type?	-
5	Does the AFC DUT need to be supplied with BSS configuration parameters?	-
6	Does the AFC DUT manufacturer attest to AFC DUT compliance with rules for LPI operation?	-
7	Does the AFC DUT need to be supplied with mandatory registration information to formulate an Available Spectrum Inquiry Request	No
8	If the Answer to Item 7 is "Yes". What is the geographic Supported by the AFC DUT?	-
9	Does the AFC DUT supports 160 MHz channel width operation?	Yes
10	Which method does AFC DUT acting as a Fixed Client uses for sending an Available Spectrum Inquiry Request?	-


Note: The above information was declared by manufacturer.



## 2.2 Test Configuration

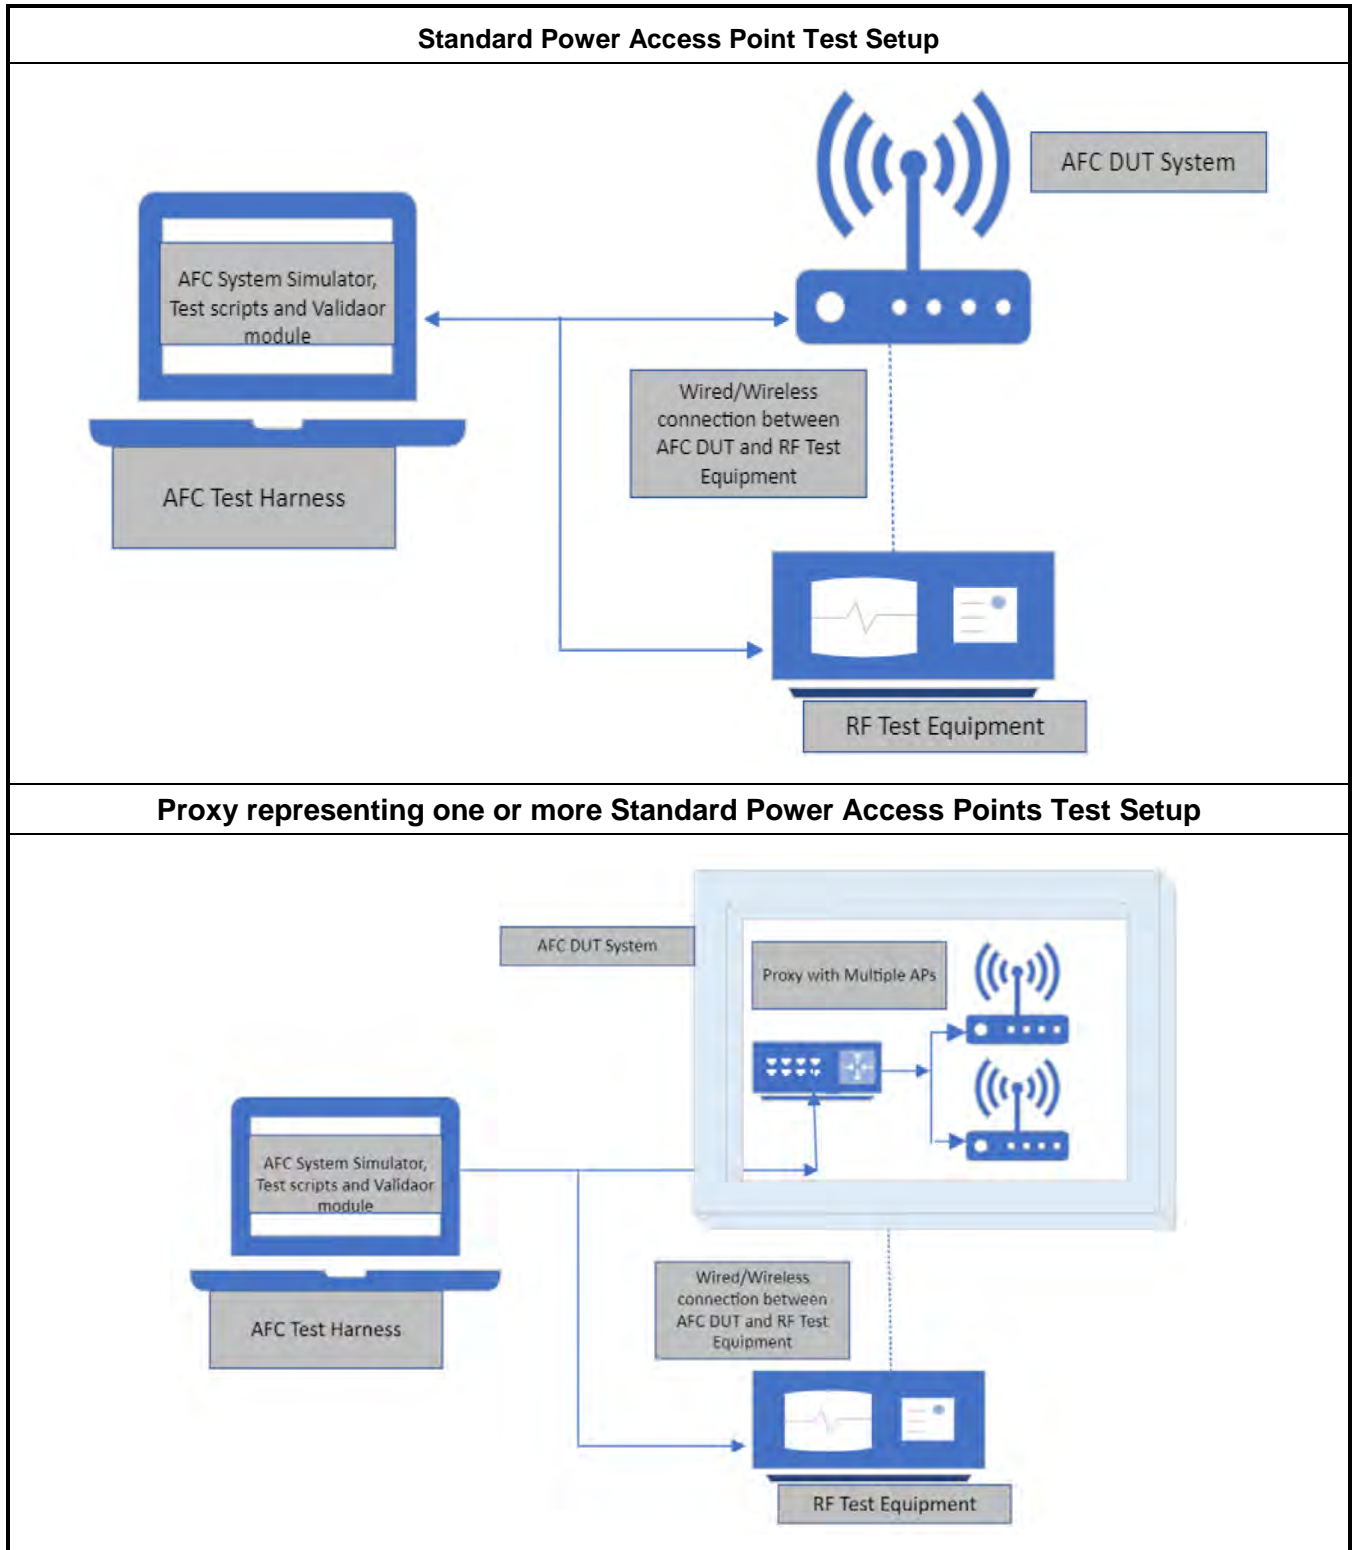

### Fixed Client Device Test Setup

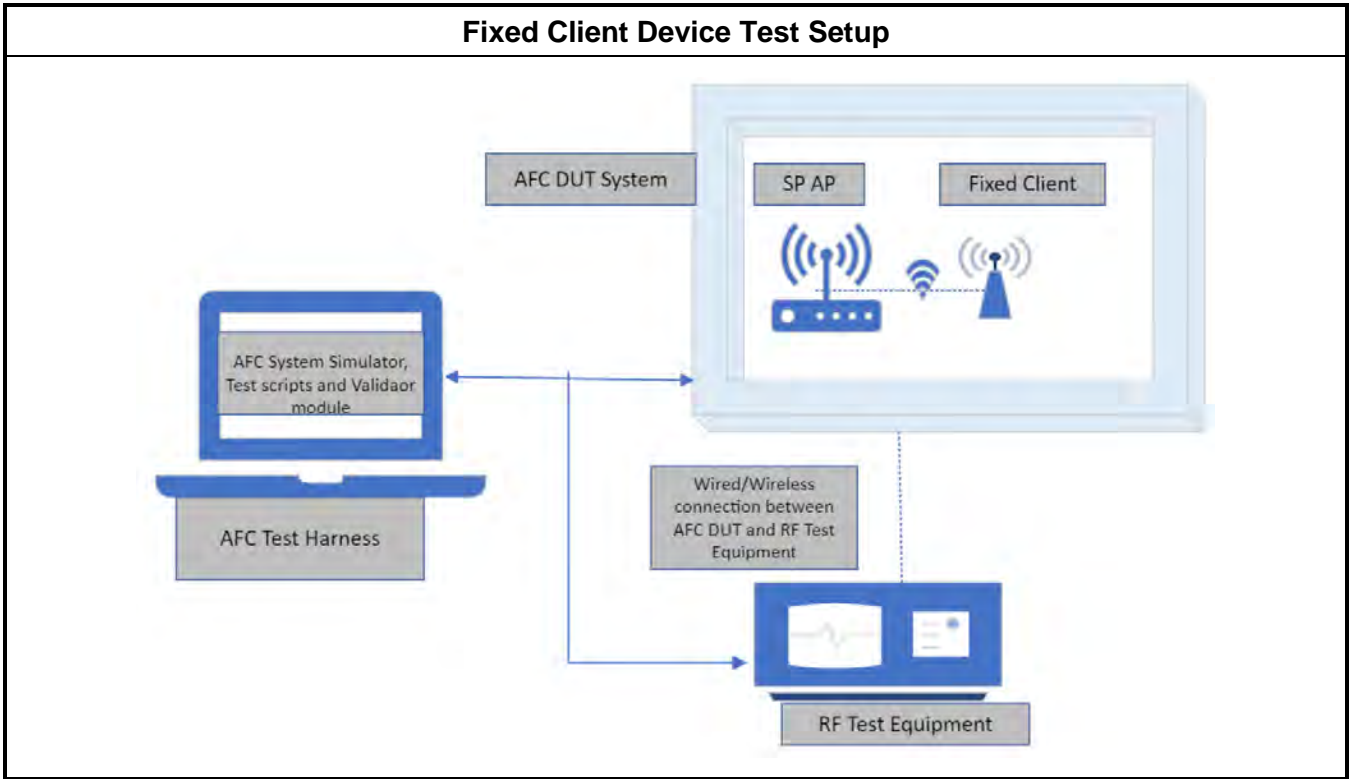



### 3 Protocol Test Results

#### 3.1 Successful Registration and Spectrum Access Request

##### 3.1.1 Test Procedure

Step	Description
1	If the AFC DUT is Standard Power Access Point, go to Step 2, else go to Step 12
2	AFC DUT set to Initial Pre-test State. If needed (see Table 5 declaration), configure the AFC DUT with BSS parameters per Table 9 and a temporary test regulatory identifier (e.g., FCC ID), geographic coordinates, antenna height, and uncertainty parameters. Configure the AFC DUT with AFC System URL and server root certificate. Trigger the AFC DUT to send to the AFC DUT Test Harness an Available Spectrum Inquiry Request.
3	AFC DUT sends a valid Available Spectrum Inquiry Request containing the inquired Frequency Range and/or the inquired Channels fields*.
4	AFC DUT Test Harness validates the presence of mandatory registration information
5	AFC DUT Test Harness sends an Available Spectrum Inquiry Response containing a list of available frequency ranges and/or channels and the maximum permissible transmit power in the availableFrequencyInfo and/or availableChannelInfo fields.
6	Throughout Step 1 to Step 4, RF Test Equipment monitors the output of the AFC DUT to confirm that the AFC DUT does not transmit: <ul style="list-style-type: none"><li>In the band if the AFC DUT supports only SP operation</li></ul> Or <ul style="list-style-type: none"><li>Above LPI limits for AFC DUT whose manufacturer attests to its compliance with rules for LPI operation</li></ul> Wait for 60 seconds RF Test Equipment monitors any transmission by the AFC DUT conforms to the following: <ul style="list-style-type: none"><li>For SP only operation, AFC DUT conforms to the conditions contained in the Available Spectrum Inquiry Response and does not exceed emissions limits in adjacent frequencies.</li><li>For AFC DUT whose manufacturer attests to its compliance with rules for LPI operation, AFC DUT transmit power in the band is less than CEILING [LPI limits, SP limits contained in the Available Spectrum Inquiry Response] and does not exceed emissions limits in adjacent frequencies.</li></ul>
7	Trigger the AFC DUT to send to the AFC DUT Test Harness an Available Spectrum Inquiry Request.
8	AFC DUT sends a valid Available Spectrum Inquiry Request containing the inquiredFrequencyRange and/or the inquiredChannels fields*.
9	AFC DUT Test Harness validates the presence of mandatory registration information
10	AFC DUT Test Harness sends an Available Spectrum Inquiry Response containing a list of available frequency ranges and/or channels and the maximum permissible transmit power in the availableFrequencyInfo and/or availableChannelInfo fields which are significantly different from Step 5.
11	Wait for 5 minutes (configurable) RF Test Equipment monitors any transmission by the AFC DUT conforms to the following: <ul style="list-style-type: none"><li>For SP only operation, AFC DUT conforms to the conditions contained in the latest Available Spectrum Inquiry Response and does not exceed emissions limits in adjacent frequencies.</li><li>For AFC DUT whose manufacturer attests to its compliance with rules for LPI operation, AFC DUT transmit power in the band is less than CEILING [LPI limits, SP limits contained in the latest Available Spectrum Inquiry Response] and does not exceed emissions limits in adjacent frequencies.</li></ul>
12	If the AFC DUT is Fixed Client, go to Step 13 else Stop the test
13	The AFC DUT set to Initial Pre-test State.
14	If needed (see Table 5 declaration), configure the AFC DUT with a temporary test regulatory identifier (e.g., FCC ID), geographic coordinates, antenna height, and uncertainty parameters. Configure the AFC DUT with AFC System URL and server root certificate. Trigger the AFC DUT to send to the AFC DUT Test Harness an Available Spectrum Inquiry Request using either In-band or Out-of-band methods.
15	AFC DUT sends a valid Available Spectrum Inquiry Request containing the inquiredFrequencyRange and/or the inquiredChannels fields*
16	AFC DUT Test Harness validates the presence of mandatory registration information
17	AFC DUT Test Harness sends an Available Spectrum Inquiry Response containing a list of available frequency ranges and/or channels and the maximum permissible transmit power in the availableFrequencyInfo and/or availableChannelInfo fields.



18	If AFC DUT used Out-of-band method, initiate connection procedure between AFC DUT and SP Access Point by following instructions provided by the AFC DUT Vendor
19	Wait for 60 seconds RF Test Equipment monitors any transmission by the AFC DUT conforms to the conditions contained in the Available Spectrum Inquiry Response and does not exceed emissions limits in adjacent frequencies
20	Trigger the AFC DUT to send to the AFC DUT Test Harness an Available Spectrum Inquiry Request using either In-band or Out-of-band methods
21	AFC DUT sends a valid Available Spectrum Inquiry Request containing the inquiredFrequencyRange and/or the inquiredChannels fields*
22	AFC DUT Test Harness validates the presence of mandatory registration information
23	AFC DUT Test Harness sends an Available Spectrum Inquiry Response containing a list of available frequency ranges and/or channels and the maximum permissible transmit power in the availableFrequencyInfo and/or availableChannelInfo fields which are significantly different from Step 17.
24	If AFC DUT used Out-of-band method, initiate connection procedure between AFC DUT and SP Access Point by following instructions provided by the AFC DUT Vendor
25	Wait for 60 seconds (configurable) RF Test Equipment monitors any transmission by the AFC DUT conforms to the conditions contained in the latest Available Spectrum Inquiry Response and does not exceed emissions limits in adjacent frequencies

**3.1.2 Test Result**

Refer as Appendix A~C



### 3.2 Unsuccessful Spectrum Access Request

#### 3.2.1 Test Procedure

Step	Description
1	If the AFC DUT is Standard Power Access Point, go to Step 2, else go to Step 7
2	AFC DUT set to Initial Pre-test State. If needed (see Table 5 declaration), configure the AFC DUT with BSS parameters per Table 9 and a temporary test regulatory identifier (e.g., FCC ID), geographic coordinates, antenna height, and uncertainty parameters. Configure the AFC DUT with AFC System URL and server root certificate. Trigger the AFC DUT to send to the AFC DUT Test Harness an Available Spectrum Inquiry Request.
3	AFC DUT sends a valid Available Spectrum Inquiry Request containing the inquiredFrequencyRange and/or the inquiredChannels fields*.
4	AFC DUT Test Harness validates mandatory registration information.
5	AFC DUT Test Harness sends an Available Spectrum Inquiry Response indicating that no frequency ranges and/or channels are available.
6	Throughout Step 2 to Step 5 and subsequent to Step 5, RF Test Equipment monitors the output of the AFC DUT to confirm the following: <ul style="list-style-type: none"><li>• For SP only operation, AFC DUT does not transmit in the band.</li><li>• For AFC DUT whose manufacturer attests to its compliance with rules for LPI operation, the AFC DUT does not transmit above LPI limits.</li></ul>
7	If the AFC DUT is Fixed Client, go to Step 8 else Stop the test
8	The AFC DUT set to Initial Pre-test State.
9	If needed (see Table 5 declaration), configure the AFC DUT with a temporary test regulatory identifier (e.g., FCC ID or IC ID), geographic coordinates, antenna height, and uncertainty parameters. Configure the AFC DUT with AFC System URL and server root certificate. Trigger the AFC DUT to send to the AFC DUT Test Harness an Available Spectrum Inquiry Request.
10	AFC DUT sends a valid Available Spectrum Inquiry Request containing the inquiredFrequencyRange and/or the inquiredChannels fields*.
11	AFC DUT Test Harness validates mandatory registration information.
12	AFC DUT Test Harness sends an Available Spectrum Inquiry Response indicating that no frequency ranges and/or channels are available using either In-band or Out-of-band methods.
13	If AFC DUT used Out-of-band method, initiate connection procedure between Fixed Client and SP Access Point by following instructions provided by the AFC DUT Vendor
13	Wait for 60 seconds RF Test Equipment monitors that the AFC DUT does not transmit above maximum transmit power limits advertised by the Standard Power Access Point for Standard Client Devices in the channel.

#### 3.2.2 Test Result

Refer as Appendix A~C



### 3.3 Successful Spectrum Access Update

#### 3.3.1 Test Procedure

Step	Description
1	If the AFC DUT is Standard Power Access Point, go to Step 2, else go to Step 12
2	AFC DUT set to Initial Pre-test State. If needed (see Table 5 declaration), configure the DUT with BSS parameters per Table 9 and a temporary test regulatory identifier (e.g., FCC ID), geographic coordinates, antenna height, and uncertainty parameters. Configure the AFC DUT with AFC System URL and server root certificate. Trigger the AFC DUT to send to the AFC DUT Test Harness an Available Spectrum Inquiry Request.
3	AFC DUT sends a valid Available Spectrum Inquiry Request containing the inquiredFrequencyRange and/or the inquiredChannels fields*.
4	AFC DUT Harness validates mandatory registration information.
5	AFC DUT Test Harness sends an Available Spectrum Inquiry Response containing a list of available frequency ranges and/or channels and the maximum permissible transmit power in the availableFrequencyInfo and/or availableChannelInfo fields.
6	Throughout the preceding steps, RF Test Equipment monitors the output of the AFC DUT to confirm that the AFC DUT does not transmit: <ul style="list-style-type: none"> <li>In the band if the AFC DUT supports only SP operation</li> </ul> Or <ul style="list-style-type: none"> <li>Above LPI limits for AFC DUT whose manufacturer attests to its compliance with rules for LPI operation</li> </ul> Wait for 60 seconds RF Test Equipment monitors any transmission by the AFC DUT conforms to the following: <ul style="list-style-type: none"> <li>For SP only operation, AFC DUT conforms to the conditions contained in the Available Spectrum Inquiry Response and does not exceed emissions limits in adjacent frequencies.</li> <li>For AFC DUT whose manufacturer attests to its compliance with rules for LPI operation, AFC DUT transmit power in the band is less than CEILING [LPI limits, SP limits contained in the Available Spectrum Inquiry Response] and does not exceed emissions limits in adjacent frequencies.</li> </ul>
7	AFC DUT is power cycled. If needed (see Table 5 declaration), configure the AFC DUT with a temporary test regulatory identifier (e.g., FCC ID), new geographic coordinates, antenna height, and uncertainty parameters. Configure the AFC DUT with AFC System URL and server root certificate.
8	Wait for 60 seconds If the AFC DUT does not send an Available Spectrum Inquiry Request, RF Test Equipment monitors the output of the AFC DUT to verify the following and STOP the test <ul style="list-style-type: none"> <li>For SP only operation, AFC DUT does not transmit in the band.</li> <li>For AFC DUT whose manufacturer attests to its compliance with rules for LPI operation, the AFC DUT does not transmit above LPI limits.</li> </ul> If the AFC DUT sends an Available Spectrum Inquiry Request, then CONTINUE with Step 9
9	AFC DUT Test Harness evaluates validity of mandatory registration information
10	AFC DUT Test Harness waits for 60 seconds before sending an Available Spectrum Inquiry Response containing a list of available frequency ranges and/or channels and the maximum permissible transmit power in the availableFrequencyInfo and/or availableChannelInfo fields which are significantly different from Step 5. <ul style="list-style-type: none"> <li>During the 60 seconds wait time: <ul style="list-style-type: none"> <li>For AFC DUT whose manufacturer attests to its compliance with rules for LPI operation, RF Test Equipment monitors the output of the AFC DUT to confirm that AFC DUT does not transmit above LPI threshold limits</li> <li>For SP only operation, RF Test Equipment monitors the output of the AFC DUT to confirm that AFC DUT doesn't transmit in the band</li> </ul> </li> </ul>
11	Wait for 60 seconds RF Test Equipment monitors any transmission by the AFC DUT conforms to the following: <ul style="list-style-type: none"> <li>For SP only operation, AFC DUT conforms to the conditions contained in the Available Spectrum Inquiry Response and does not exceed emissions limits in adjacent frequencies.</li> <li>For AFC DUT whose manufacturer attests to its compliance with rules for LPI operation, AFC DUT transmit power in the band is less than CEILING [LPI limits, SP limits contained in the Available Spectrum Inquiry Response] and does not exceed emissions limits in adjacent frequencies.</li> </ul>
12	If the AFC DUT is Fixed Client, go to Step 13 else Stop the test
13	The AFC DUT set to Initial Pre-test State.



14	If needed (see Table 5 declaration), configure the AFC DUT with a temporary test regulatory identifier (e.g., FCC ID), geographic coordinates, antenna height, and uncertainty parameters. Configure the AFC DUT with AFC System URL and server root certificate. Trigger the AFC DUT to send to the AFC DUT Test Harness an Available Spectrum Inquiry Request using either In-band or Out-of- band methods.
15	AFC DUT sends a valid Available Spectrum Inquiry Request containing the inquiredFrequencyRange and/or the inquiredChannels fields*
16	AFC DUT Test Harness validates the presence of mandatory registration information
17	AFC DUT Test Harness sends an Available Spectrum Inquiry Response containing a list of available frequency ranges and/or channels and the maximum permissible transmit power in the availableFrequencyInfo and/or availableChannelInfo fields.
18	If AFC DUT used Out-of-band method, initiate connection procedure between AFC DUT and SP Access Point by following instructions provided by the AFC DUT Vendor
19	Wait for 60 seconds RF Test Equipment monitors any transmission by the AFC DUT conforms to the conditions contained in the Available Spectrum Inquiry Response and does not exceed emissions limits in adjacent frequencies
20	AFC DUT is power cycled. If needed (see Table 5 declaration), configure the AFC DUT with a temporary test regulatory identifier (e.g., FCC ID), new geographic coordinates, antenna height, and uncertainty parameters. Configure the AFC DUT with AFC System URL and server root certificate
21	Wait for 60 seconds If the AFC DUT does not send an Available Spectrum Inquiry Request, RF Test Equipment monitors the output of the AFC DUT to verify the AFC DUT does not transmit above maximum transmit power limits advertised by the Standard Power Access Point for Standard Client Devices in the channel and STOP the test. If the AFC DUT sends an Available Spectrum Inquiry Request, then CONTINUE with Step 21
22	AFC DUT Test Harness evaluates validity of mandatory registration information
23	AFC DUT Test Harness waits for 60 seconds before sending an Available Spectrum Inquiry Response containing a list of available frequency ranges and/or channels and the maximum permissible transmit power in the availableFrequencyInfo and/or availableChannelInfo fields which are significantly different from step 17. During the 60 seconds wait time, RF Test Equipment monitors the output of the AFC DUT to confirm that the AFC DUT does not transmit above maximum transmit power limits advertised by the Standard Power Access Point for Standard Client Devices in the channel.
24	If AFC DUT used Out-of-band method, initiate connection procedure between AFC DUT and SP Access Point by following instructions provided by the AFC DUT Vendor
25	Wait for 60 seconds RF Test Equipment monitors any transmission by the AFC DUT conforms to the conditions contained in the Available Spectrum Inquiry Response and does not exceed emissions limits in adjacent frequencies

### 3.3.2 Test Result

Refer as Appendix A~C



### 3.4 Unsuccessful Spectrum Access Update

#### 3.4.1 Test Procedure

Step	Description
1	If the AFC DUT is Standard Power Access Point, go to Step 2, else go to Step 12
2	AFC DUT set to Initial Pre-test State. If needed (see Table 5 declaration), configure the AFC DUT with BSS parameters per Table 9 and a temporary test regulatory identifier (e.g., FCC ID), geographic coordinates, antenna height, and uncertainty parameters. Configure the DUT with AFC System URL and server root certificate. Trigger the DUT to send to the AFC DUT Test Harness an Available Spectrum Inquiry Request using either In-band or Out-of-band methods.
3	AFC DUT sends a valid Available Spectrum Inquiry Request containing the inquiredFrequencyRange and/or the inquiredChannels fields.
4	AFC DUT Test Harness validates mandatory registration information
5	AFC DUT Test Harness sends an Available Spectrum Inquiry Response containing a list of available frequency ranges and/or channels and the maximum permissible transmit power in the availableFrequencyInfo and/or availableChannelInfo fields.
6	Throughout the Step 2 to 5, RF Test Equipment monitors the output of the AFC DUT to confirm that the AFC DUT does not transmit: <ul style="list-style-type: none"> <li>In the band if the AFC DUT supports only SP operation</li> </ul> Or <ul style="list-style-type: none"> <li>Above LPI limits for AFC DUT whose manufacturer attests to its compliance with rules for LPI operation</li> </ul> Wait for 60 seconds RF Test Equipment monitors any transmission by the AFC DUT conforms to the following: <ul style="list-style-type: none"> <li>For SP only operation, AFC DUT conforms to the conditions contained in the Available Spectrum Inquiry Response and does not exceed emissions limits in adjacent frequencies.</li> </ul> For AFC DUT whose manufacturer attests to its compliance with rules for LPI operation, AFC DUT transmit power in the band is less than CEILING [LPI limits, SP limits contained in the Available Spectrum Inquiry Response] and does not exceed emissions limits in adjacent frequencies
7	AFC DUT is power cycled. If needed (see Table 5 declaration), configure the AFC DUT with a temporary test regulatory identifier (e.g., FCC ID), new geographic coordinates, antenna height, and uncertainty parameters. Configure the AFC DUT with AFC System URL and server root certificate.
8	Wait for 60 seconds <ul style="list-style-type: none"> <li>If the AFC DUT does not send an Available Spectrum Inquiry Request, RF Test Equipment monitors the output of the DUT to verify the following and STOP the test: <ul style="list-style-type: none"> <li>For SP only operation, AFC DUT does not transmit in the band,</li> <li>For AFC DUT whose manufacturer attests to its compliance with rules for LPI operation, the AFC DUT does not transmit above LPI limits.</li> </ul> </li> <li>If the AFC DUT sends an Available Spectrum Inquiry Request, then CONTINUE with Step 8</li> </ul>
9	AFC DUT Test Harness evaluates validity of mandatory registration information.
10	AFC DUT Test Harness sends an Available Spectrum Inquiry Response indicating that no frequency ranges and/or channels are available.
11	Throughout Step 7 to 10 and subsequent to Step 10 Test Equipment monitors the output of the AFC DUT to confirm that: For SP only operation, AFC DUT does not transmit in the band. For AFC DUT whose manufacturer attests to its compliance with rules for LPI operation, the AFC DUT does not transmit above LPI limits.
12	If the AFC DUT is Fixed Client, go to Step 13 else Stop the test
13	The AFC DUT set to Initial Pre-test State.
14	If needed (see Table 5 declaration), configure the DUT with a temporary test regulatory identifier (e.g., FCC ID), geographic coordinates, antenna height, and uncertainty parameters. Configure the AFC DUT with AFC System URL and server root certificate. Trigger the AFC DUT to send to the AFC DUT Test Harness an Available Spectrum Inquiry Request using either In-band or Out-of- band methods.
15	AFC DUT sends a valid Available Spectrum Inquiry Request containing the inquiredFrequencyRange and/or the inquiredChannels fields*
16	AFC DUT Test Harness validates the presence of mandatory registration information
17	AFC DUT Test Harness sends an Available Spectrum Inquiry Response containing a list of available frequency





	ranges and/or channels and the maximum permissible transmit power in the availableFrequencyInfo and/or availableChannelInfo fields.
18	If AFC DUT used Out-of-band method, initiate connection procedure between AFC DUT and SP Access Point by following instructions provided by the AFC DUT Vendor
19	Wait for 60 seconds RF Test Equipment monitors any transmission by the AFC DUT conforms to the conditions contained in the Available Spectrum Inquiry Response and does not exceed emissions limits in adjacent frequencies
20	AFC DUT is power cycled. If needed (see Table 5 declaration), configure the AFC DUT with a temporary test regulatory identifier (e.g., FCC ID or IC ID), new geographic coordinates, antenna height, and uncertainty parameters. Configure the AFC DUT with AFC System URL and server root certificate
21	Wait for 60 seconds If the AFC DUT does not send an Available Spectrum Inquiry Request, RF Test Equipment monitors that the AFC DUT does not transmit above maximum transmit power limits advertised by the Standard Power Access Point for Standard Client Devices in the channel., If the AFC DUT sends an Available Spectrum Inquiry Request, then CONTINUE with Step 22 else STOP the test
22	AFC DUT Test Harness evaluates validity of mandatory registration information.
23	AFC DUT Test Harness sends an Available Spectrum Inquiry Response indicating that no frequency ranges and/or channels are available.
24	If AFC DUT used Out-of-band method, initiate connection procedure between AFC DUT and SP Access Point by following instructions provided by the AFC DUT Vendor
25	Wait for 60 seconds RF Test Equipment monitors that the AFC DUT does not transmit above maximum transmit power limits advertised by the Standard Power Access Point for Standard Client Devices in the channel.

**3.4.2 Test Result**

Refer as Appendix A~C



### 3.5 Unsuccessful Server Validation

#### 3.5.1 Test Procedure

Step	Description
1	<p>The AFC DUT set to Initial Pre-test State.            If needed (see Table 5 declaration), configure the AFC DUT with BSS parameters per Table 9 and a temporary test regulatory identifier (e.g., FCC ID), geographic coordinates, antenna height, and uncertainty parameters.            Configure the AFC DUT Test Harness with TLS configuration that is the same as the default configuration defined in Section 2.3.1 except for the following:</p> <ul style="list-style-type: none"> <li>Run 1: A different server certificate (and private key) with SAN domain name entry "badafc.com" (i.e. that does not match AFC system URL's domain name); signed by the same root certificate as per Section 2.3.1</li> <li>Run 2: A different server certificate (and private key) where all attributes other than Public Key are the same as the server certificate per Section 2.3.1, but the certificate is signed by a different root certificate</li> <li>Run 3: A different server certificate (and private key) with SAN domain name entry "wfatestorg.org" only (i.e. SAN domain name only matches suffix of AFC server's hostname); signed by the same root certificate as per Section 2.3.1</li> <li>Run 4: A different server certificate (and private key) where all attributes other than Public Key are the same as the server certificate per Section 2.3.1 signed by the same root certificate as per Section 2.3.1, but the server certificate is revoked as indicated in stapled OCSP response</li> <li>Run 5: Same configuration as per Section 2.3.1, except OCSP stapling is disabled and CRL/OCSP servers are not available</li> <li>Run 6: Same configuration as per Section 2.3.1, except stapled OCSP response has expired and CRL/OCSP servers are not available</li> <li>Run 7: Same configuration as per Section 2.3.1, except only the TLS cipher suite "eNULL" (no encryption) is enabled</li> <li>Run 8: N/A (same configuration as per Section 2.3.1)</li> </ul> <p>Configure the AFC DUT with the AFC System URL and the following root certificate:            Runs 1-7: Root certificate as per Section 2.3.1            Run 8: No root certificate</p> <p>Trigger the AFC DUT to send to the AFC DUT Test Harness an Available Spectrum Inquiry Request using either In-band or Out-of-band methods.</p>
2	AFC DUT Test Harness waits 10 seconds, and verifies no Available Spectrum Inquiry Request is sent to it.
3	Steps 1 and 2 are repeated for each of the remaining Runs

#### 3.5.2 Test Result

Refer as Appendix A



## 4 Test Equipment and Calibration Data

Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
Spectrum analyzer	R&S	FSV40	100979	9kHz~40GHz	May 29, 2023	May 28, 2024	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-06	1 GHz – 18 GHz	Oct. 03, 2022	Oct. 02, 2023	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-07	1 GHz – 18 GHz	Oct. 03, 2022	Oct. 02, 2023	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-08	1 GHz – 18 GHz	Oct. 03, 2022	Oct. 02, 2023	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-09	1 GHz – 18 GHz	Oct. 03, 2022	Oct. 02, 2023	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz – 18 GHz	Oct. 03, 2022	Oct. 02, 2023	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-30	1 GHz – 18 GHz	Oct. 03, 2022	Oct. 02, 2023	Conducted (TH01-CB)
RF Power Divider	STI	2 Way	DV-2way -05	1GHz ~ 8GHz	Oct. 04, 2022	Oct. 03, 2023	Conducted (TH01-CB)
RF Power Divider	STI	2 Way	DV-2way -06	1GHz ~ 8GHz	Oct. 04, 2022	Oct. 03, 2023	Conducted (TH01-CB)
RF Power Divider	STI	2 Way	DV-2way -07	1GHz ~ 8GHz	Oct. 04, 2022	Oct. 03, 2023	Conducted (TH01-CB)
RF Power Divider	STI	2 Way	DV-2way -08	1GHz ~ 8GHz	Oct. 04, 2022	Oct. 03, 2023	Conducted (TH01-CB)
Test Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.  
NCR means Non-Calibration required.



## **5 Measurement Uncertainty**

<b>Test Items</b>	<b>Uncertainty</b>	<b>Remark</b>
Conducted Emission	3.1 dB	Confidence levels of 95%

## AFC DUT Compliance Test Report

### DUT Information

<b>AFC DUT System</b>	Standard Power AP
<b>DUT Vendor Name</b>	Cambium Networks
<b>DUT Product Model</b>	ePMP 4600 6 GHz 4x4 Access Point

### Test Result

FCC Requirements	TestCaseName	Test Result
15.407(k)(8)(v)	<a href="#">CT_AFC_ServerValidation_AP_AFCDUSV35_NoRootCA_10639_1(Unsuccessful server validation)</a>	PASS
15.407(k)(8)(v)	<a href="#">CT_AFC_ServerValidation_AP_AFCDUSV35_TLSCipherSuiteENULL_10638_1(Unsuccessful server validation)</a>	PASS
15.407(k)(8)(v)	<a href="#">CT_AFC_ServerValidation_AP_AFCDUSV35_StapledOCSPRespExpired_10637_1(Unsuccessful server validation)</a>	PASS
15.407(k)(8)(v)	<a href="#">CT_AFC_ServerValidation_AP_AFCDUSV35_OCSPStaplingDisabled_10636_1(Unsuccessful server validation)</a>	PASS
15.407(k)(8)(v)	<a href="#">CT_AFC_ServerValidation_AP_AFCDUSV35_ServerCertRevoked_10635_1(Unsuccessful server validation)</a>	PASS
15.407(k)(8)(v)	<a href="#">CT_AFC_ServerValidation_AP_AFCDUSV35_MatchSuffixSAN_10634_1(Unsuccessful server validation)</a>	PASS
15.407(k)(8)(v)	<a href="#">CT_AFC_ServerValidation_AP_AFCDUSV35_DifferentRootCA_10633_1(Unsuccessful server validation)</a>	PASS
15.407(k)(8)(v)	<a href="#">CT_AFC_ServerValidation_AP_AFCDUSV35_NonMatchSAN_10632_1(Unsuccessful server validation)</a>	PASS
15.407(k)(8)(i), 15.407(k)(8)(ii), 15.407(k)(9)(i)	<a href="#">CT_AFC_SP_AP_AFCDUAU34_Frequency_10617_1(Unsuccessful spectrum access update)</a>	PASS
15.407(k)(8)(i), 15.407(k)(8)(ii), 15.407(k)(9)(i)	<a href="#">CT_AFC_SP_AP_AFCDSAU33_Frequency_10616_1(Successful spectrum access update)</a>	PASS
15.407(k)(1), 15.407(k)(8)(i), 15.407(k)(8)(ii), 15.407(k)(8)(iii)	<a href="#">CT_AFC_SP_AP_AFCDUSA32_Frequency_10615_1(Unsuccessful registration and spectrum access request)</a>	PASS
15.407(k)(1), 15.407(k)(8)(i), 15.407(k)(8)(ii), 15.407(k)(8)(iii), 15.407(l)(ii), 15.407(k)(8)(iv)	<a href="#">CT_AFC_SP_AP_AFCDRSA31_Frequency_160MHz_10614_1(Successful registration and spectrum access request)</a>	PASS
15.407(k)(1), 15.407(k)(8)(i), 15.407(k)(8)(ii), 15.407(k)(8)(iii), 15.407(l)(ii), 15.407(k)(8)(iv)	<a href="#">CT_AFC_SP_AP_AFCDRSA31_Frequency_80MHz_10613_1(Successful registration and spectrum access request)</a>	PASS
15.407(k)(1), 15.407(k)(8)(i), 15.407(k)(8)(ii), 15.407(k)(8)(iii), 15.407(l)(ii), 15.407(k)(8)(iv)	<a href="#">CT_AFC_SP_AP_AFCDRSA31_Frequency_40MHz_10612_1(Successful registration and spectrum access request)</a>	PASS
15.407(k)(1), 15.407(k)(8)(i), 15.407(k)(8)(ii), 15.407(k)(8)(iii), 15.407(l)(ii), 15.407(k)(8)(iv)	<a href="#">CT_AFC_SP_AP_AFCDRSA31_Frequency_20MHz_10611_1(Successful registration and spectrum access request)</a>	PASS

### Test Measurements

TestCaseName: CT\_AFC\_ServerValidation\_AP\_AFCDUSV35\_NoRootCA\_10639\_1 (Unsuccessful server validation)

TestResult:PASS

Band:6GHz

Measurements Name	Description	Value	Validation Result
AFC_DUT_SEND_SPECTRUM_INQUIRYREQUEST	AFC DUT sends an Available Spectrum Inquiry Request	false	PASS

TestCaseName: CT\_AFC\_ServerValidation\_AP\_AFCDUSV35\_TLSCipherSuiteENULL\_10638\_1 (Unsuccessful server validation)

TestResult:PASS

Band:6GHz

Measurements Name	Description	Value	Validation Result
AFC_DUT_SEND_SPECTRUM_INQUIRYREQUEST	AFC DUT sends an Available Spectrum Inquiry Request	false	PASS

TestCaseName: CT\_AFC\_ServerValidation\_AP\_AFCDUSV35\_StapledOCSPRespExpired\_10637\_1 (Unsuccessful server validation)

TestResult:PASS

Band:6GHz

Measurements Name	Description	Value	Validation Result
AFC_DUT_SEND_SPECTRUM_INQUIRYREQUEST	AFC DUT sends an Available Spectrum Inquiry Request	false	PASS

TestCaseName: CT\_AFC\_ServerValidation\_AP\_AFCDUSV35\_OCSPStaplingDisabled\_10636\_1 (Unsuccessful server validation)

TestResult:PASS

Band:6GHz

Measurements Name	Description	Value	Validation Result
AFC_DUT_SEND_SPECTRUM_INQUIRYREQUEST	AFC DUT sends an Available Spectrum Inquiry Request	false	PASS

TestCaseName: CT\_AFC\_ServerValidation\_AP\_AFCDUSV35\_ServerCertRevoked\_10635\_1 (Unsuccessful server validation)

TestResult:PASS

Band:6GHz

Measurements Name	Description	Value	Validation Result
AFC_DUT_SEND_SPECTRUM_INQUIRYREQUEST	AFC DUT sends an Available Spectrum Inquiry Request	false	PASS

TestCaseName: CT\_AFC\_ServerValidation\_AP\_AFCDUSV35\_MatchSuffixSAN\_10634\_1 (Unsuccessful server validation)

TestResult:PASS

Band:6GHz

Measurements Name	Description	Value	Validation Result
AFC_DUT_SEND_SPECTRUM_INQUIRYREQUEST	AFC DUT sends an Available Spectrum Inquiry Request	false	PASS

TestCaseName: CT\_AFC\_ServerValidation\_AP\_AFCDUSV35\_DifferentRootCA\_10633\_1 (Unsuccessful server validation)

TestResult:PASS

Band:6GHz

Measurements Name	Description	Value	Validation Result
AFC_DUT_SEND_SPECTRUM_INQUIRYREQUEST	AFC DUT sends an Available Spectrum Inquiry Request	false	PASS

AFC_DUT_SEND_SPECTRUM_INQUIRYREQUEST	AFC DUT sends an Available Spectrum Inquiry Request	false	PASS
--------------------------------------	---	-------	------

TestCaseName: CT\_AFC\_ServerValidation\_AP\_AFCDUSV35\_NonMatchSAN\_10632\_1 (Unsuccessful server validation)  
 TestResult:PASS  
 Band:6GHz

Measurements Name	Description	Value	Validation Result
AFC_DUT_SEND_SPECTRUM_INQUIRYREQUEST	AFC DUT sends an Available Spectrum Inquiry Request	false	PASS

TestCaseName: CT\_AFC\_SP\_AP\_AFCDAU34\_Frequency\_10617\_1 (Unsuccessful spectrum access update)  
 TestResult:PASS  
 Band:6GHz

Measurements Name	Description	Value	Validation Result
AFC_DUT_SP_OPERATION	AFC DUT transmit with standard power in the band before the Spectrum Inquiry Response	false	PASS
AFC_DUT_SEND_SPECTRUM_INQUIRYREQUEST	AFC DUT sends an Available Spectrum Inquiry Request	true	PASS
AFC_DUT_SPECTRUM_INQUIRYREQUEST_VALID_1	Valid mandatory registration information	true	PASS
AFC_DUT_CONFORM_SPECTRUM_INQUIRYRESPONSE_1	AFC DUT conforms to the conditions in Spectrum Response (23 dBm/MHz PSD) on channel 1 bandwidth 20.	true	PASS
AFC_DUT_CONFORM_ADJACENT_FREQUENCIES_EMISSIONS_LIMITS	AFC DUT conforms to not exceed emissions limits in adjacent frequencies	true	PASS
AFC_DUT_SP_OPERATION_NO_REQ	AFC DUT transmit with standard power in the band in no Spectrum Inquiry Request case	false	PASS

TestCaseName: CT\_AFC\_SP\_AP\_AFCDSAU33\_Frequency\_10616\_1 (Successful spectrum access update)  
 TestResult:PASS  
 Band:6GHz

Measurements Name	Description	Value	Validation Result
AFC_DUT_SP_OPERATION_1	AFC DUT transmit with standard power in the band before the Spectrum Inquiry Response	false	PASS
AFC_DUT_SEND_SPECTRUM_INQUIRYREQUEST	AFC DUT sends an Available Spectrum Inquiry Request	true	PASS
AFC_DUT_SPECTRUM_INQUIRYREQUEST_VALID_1	Valid mandatory registration information	true	PASS
AFC_DUT_CONFORM_SPECTRUM_INQUIRYRESPONSE_1	AFC DUT conforms to the conditions in Spectrum Response (21.716139347501574 dBm/MHz PSD) on channel 1 bandwidth 20.	true	PASS

AFC_DUT_CONFORM_ADJACENT_FREQUENCIES_EMISSIONS_LIMITS_1	AFC DUT conforms to not exceed emissions limits in adjacent frequencies	true	PASS
AFC_DUT_SP_OPERATION_NO_REQ	AFC DUT transmit with standard power in the band in no Spectrum Inquiry Request case	false	PASS

TestCaseName: CT\_AFC\_SP\_AP\_AFCUSA32\_Frequency\_10615\_1 (Unsuccessful registration and spectrum access request)  
 TestResult:PASS  
 Band:6GHz

Measurements Name	Description	Value	Validation Result
AFC_DUT_SP_OPERATION	AFC DUT transmit with standard power in the band before the Spectrum Inquiry Response	false	PASS
AFC_DUT_SEND_SPECTRUM_INQUIRYREQUEST	AFC DUT sends an Available Spectrum Inquiry Request	true	PASS
AFC_DUT_SPECTRUM_INQUIRYREQUEST_VALID	Valid mandatory registration information	true	PASS
AFC_DUT_CONFORM_SPECTRUM_INQUIRYRESPONSE	AFC DUT conforms to the conditons in the Spectrum Inquiry Response	true	PASS

TestCaseName: CT\_AFC\_SP\_AP\_AFCDRSA31\_Frequency\_160MHz\_10614\_1 (Successful registration and spectrum access request)  
 TestResult:PASS  
 Band:6GHz

Measurements Name	Description	Value	Validation Result
AFC_DUT_SP_OPERATION	AFC DUT transmit with standard power in the band before the Spectrum Inquiry Response	false	PASS
AFC_DUT_SEND_SPECTRUM_INQUIRYREQUEST_1	AFC DUT sends an Available Spectrum Inquiry Request	true	PASS
AFC_DUT_SPECTRUM_INQUIRYREQUEST_VALID_1	Valid mandatory registration information	true	PASS
AFC_DUT_CONFORM_SPECTRUM_INQUIRYRESPONSE_1	AFC DUT conforms to the conditions in Spectrum Response (9.476848113772082 dBm/MHz PSD) on channel center frequency index 79 bandwidth 160.	true	PASS
AFC_DUT_CONFORM_ADJACENT_FREQUENCIES_EMISSIONS_LIMITS_1	AFC DUT conforms to not exceed emissions limits in adjacent frequencies	true	PASS
AFC_DUT_SEND_SPECTRUM_INQUIRYREQUEST_2	AFC DUT sends an Available Spectrum Inquiry Request	true	PASS
AFC_DUT_SPECTRUM_INQUIRYREQUEST_VALID_2	Valid mandatory registration information	true	PASS
AFC_DUT_CONFORM_SPECTRUM_INQUIRYRESPONSE_2	AFC DUT conforms to the conditions in Spectrum Response (8.286044339430545 dBm/MHz PSD) on channel center frequency index 143 bandwidth 160.	true	PASS



AFC_DUT_CONFORM_ADJACENT_FREQUENCIES_EMISSIONS_LIMITS_2	AFC DUT conforms to not exceed emissions limits in adjacent frequencies	true	PASS
---	---	------	------

TestCaseName: CT\_AFC\_SP\_AP\_AFCDRSA31\_Frequency\_80MHz\_10613\_1 (Successful registration and spectrum access request)  
 TestResult:PASS  
 Band:6GHz

Measurements Name	Description	Value	Validation Result
AFC_DUT_SP_OPERATION	AFC DUT transmit with standard power in the band before the Spectrum Inquiry Response	false	PASS
AFC_DUT_SEND_SPECTRUM_INQUIRYREQUEST_1	AFC DUT sends an Available Spectrum Inquiry Request	true	PASS
AFC_DUT_SPECTRUM_INQUIRYREQUEST_VALID_1	Valid mandatory registration information	true	PASS
AFC_DUT_CONFORM_SPECTRUM_INQUIRYRESPONSE_1	AFC DUT conforms to the conditions in Spectrum Response (11.969665864571661 dBm/MHz PSD) on channel center frequency index 151 bandwidth 80.	true	PASS
AFC_DUT_CONFORM_ADJACENT_FREQUENCIES_EMISSIONS_LIMITS_1	AFC DUT conforms to not exceed emissions limits in adjacent frequencies	true	PASS
AFC_DUT_SEND_SPECTRUM_INQUIRYREQUEST_2	AFC DUT sends an Available Spectrum Inquiry Request	true	PASS
AFC_DUT_SPECTRUM_INQUIRYREQUEST_VALID_2	Valid mandatory registration information	true	PASS
AFC_DUT_CONFORM_SPECTRUM_INQUIRYRESPONSE_2	AFC DUT conforms to the conditions in Spectrum Response (14.899042692397085 dBm/MHz PSD) on channel center frequency index 87 bandwidth 80.	true	PASS
AFC_DUT_CONFORM_ADJACENT_FREQUENCIES_EMISSIONS_LIMITS_2	AFC DUT conforms to not exceed emissions limits in adjacent frequencies	true	PASS

TestCaseName: CT\_AFC\_SP\_AP\_AFCDRSA31\_Frequency\_40MHz\_10612\_1 (Successful registration and spectrum access request)  
 TestResult:PASS  
 Band:6GHz

Measurements Name	Description	Value	Validation Result
AFC_DUT_SP_OPERATION	AFC DUT transmit with standard power in the band before the Spectrum Inquiry Response	false	PASS
AFC_DUT_SEND_SPECTRUM_INQUIRYREQUEST_1	AFC DUT sends an Available Spectrum Inquiry Request	true	PASS
AFC_DUT_SPECTRUM_INQUIRYREQUEST_VALID_1	Valid mandatory registration information	true	PASS

AFC_DUT_CONFORM_SPECTRUM_INQUIRYRESPONSE_1	AFC DUT conforms to the conditions in Spectrum Response (15.914352762949747 dBm/MHz PSD) on channel center frequency index 147 bandwidth 40.	true	PASS
AFC_DUT_CONFORM_ADJACENT_FREQUENCIES_EMISSIONS_LIMITS_1	AFC DUT conforms to not exceed emissions limits in adjacent frequencies	true	PASS
AFC_DUT_SEND_SPECTRUM_INQUIRYREQUEST_2	AFC DUT sends an Available Spectrum Inquiry Request	true	PASS
AFC_DUT_SPECTRUM_INQUIRYREQUEST_VALID_2	Valid mandatory registration information	true	PASS
AFC_DUT_CONFORM_SPECTRUM_INQUIRYRESPONSE_2	AFC DUT conforms to the conditions in Spectrum Response (14.388766574062533 dBm/MHz PSD) on channel center frequency index 43 bandwidth 40.	true	PASS
AFC_DUT_CONFORM_ADJACENT_FREQUENCIES_EMISSIONS_LIMITS_2	AFC DUT conforms to not exceed emissions limits in adjacent frequencies	true	PASS

TestCaseName: CT\_AFC\_SP\_AP\_AFCDRSA31\_Frequency\_20MHz\_10611\_1 (Successful registration and spectrum access request)  
 TestResult:PASS  
 Band:6GHz

Measurements Name	Description	Value	Validation Result
AFC_DUT_SP_OPERATION	AFC DUT transmit with standard power in the band before the Spectrum Inquiry Response	false	PASS
AFC_DUT_SEND_SPECTRUM_INQUIRYREQUEST_1	AFC DUT sends an Available Spectrum Inquiry Request	true	PASS
AFC_DUT_SPECTRUM_INQUIRYREQUEST_VALID_1	Valid mandatory registration information	true	PASS
AFC_DUT_CONFORM_SPECTRUM_INQUIRYRESPONSE_1	AFC DUT conforms to the conditions in Spectrum Response (20.829420724702754 dBm/MHz PSD) on channel 157 bandwidth 20.	true	PASS
AFC_DUT_CONFORM_ADJACENT_FREQUENCIES_EMISSIONS_LIMITS_1	AFC DUT conforms to not exceed emissions limits in adjacent frequencies	true	PASS
AFC_DUT_SEND_SPECTRUM_INQUIRYREQUEST_2	AFC DUT sends an Available Spectrum Inquiry Request	true	PASS
AFC_DUT_SPECTRUM_INQUIRYREQUEST_VALID_2	Valid mandatory registration information	true	PASS
AFC_DUT_CONFORM_SPECTRUM_INQUIRYRESPONSE_2	AFC DUT conforms to the conditions in Spectrum Response (21.625343302460195 dBm/MHz PSD) on channel 77 bandwidth 20.	true	PASS
AFC_DUT_CONFORM_ADJACENT_FREQUENCIES_EMISSIONS_LIMITS_2	AFC DUT conforms to not exceed emissions limits in adjacent frequencies	true	PASS



AFC capability - Inquired Frequency

CT\_AFC\_SP\_AP\_AFCDRSA31\_Frequency\_20MHz\_10611\_1

##### 2023-09-26T08:12:38Z #####

```
{
  "headers": {
    "Host": "testserver.wfatestorg.org",
    "Accept": "*/*",
    "Content-Type": "application/json",
    "X-Forwarded-For": "192.168.0.1",
    "X-Forwarded-Host": "testserver.wfatestorg.org",
    "X-Forwarded-Server": "testserver.wfatestorg.org",
    "Content-Length": "726",
    "Connection": "Keep-Alive"
  },
  "body": {
    "version": "1.4",
    "availableSpectrumInquiryRequests": [
      {
        "requestId": "367865613",
        "deviceDescriptor": {
          "serialNumber": "E8YG05QKH41H",
          "rulesetIds": [
            "US_47_CFR_PART_15_SUBPART_E"
          ],
          "certificationId": [
            {
              "nra": [
                "FCC"
              ],
              "id": [
                "Z8H89FT0068"
              ],
              "rulesetId": "US_47_CFR_PART_15_SUBPART_E"
            }
          ]
        }
      ]
    },
    "location": {
```



```
"ellipse": {
  "center": {
    "longitude": -78.589081,
    "latitude": 43.099789
  },
  "majorAxis": 13,
  "minorAxis": 13,
  "orientation": 0
},
"elevation": {
  "height": 208,
  "heightType": "AMSL",
  "verticalUncertainty": 9
},
"indoorDeployment": 2
},
"inquiredFrequencyRange": [
  {
    "lowFrequency": 5925,
    "highFrequency": 6425
  },
  {
    "lowFrequency": 6525,
    "highFrequency": 6875
  }
],
"minDesiredPower": 10
}
]
}
```

##### 2023-09-26T08:12:38Z #####

```
{
  "availableSpectrumInquiryResponses": [
    {
      "response": {
```

```
"responseCode": 0,
"shortDescription": "SUCCESS"
},
"availableFrequencyInfo": [
  {
    "frequencyRange": {
      "highFrequency": 5965,
      "lowFrequency": 5945
    },
    "maxPsd": 13.82852954318157
  },
  {
    "frequencyRange": {
      "highFrequency": 5985,
      "lowFrequency": 5965
    },
    "maxPsd": 12.458843284620581
  },
  {
    "frequencyRange": {
      "highFrequency": 6005,
      "lowFrequency": 5985
    },
    "maxPsd": 19.855067168315255
  },
  {
    "frequencyRange": {
      "highFrequency": 6025,
      "lowFrequency": 6005
    },
    "maxPsd": 9.569788060431437
  },
  {
    "frequencyRange": {
      "highFrequency": 6045,
      "lowFrequency": 6025
    },
  },
}
```

```
"maxPsd": 18.473579640688044
},
{
  "frequencyRange": {
    "highFrequency": 6065,
    "lowFrequency": 6045
  },
  "maxPsd": 14.445931367604297
},
{
  "frequencyRange": {
    "highFrequency": 6085,
    "lowFrequency": 6065
  },
  "maxPsd": 17.95554405787792
},
{
  "frequencyRange": {
    "highFrequency": 6105,
    "lowFrequency": 6085
  },
  "maxPsd": 12.270390794322031
},
{
  "frequencyRange": {
    "highFrequency": 6125,
    "lowFrequency": 6105
  },
  "maxPsd": 10.206673876490648
},
{
  "frequencyRange": {
    "highFrequency": 6145,
    "lowFrequency": 6125
  },
  "maxPsd": 12.692335475762402
},
},
```

```
{
  "frequencyRange": {
    "highFrequency": 6165,
    "lowFrequency": 6145
  },
  "maxPsd": 10.195295246064688
},
{
  "frequencyRange": {
    "highFrequency": 6185,
    "lowFrequency": 6165
  },
  "maxPsd": 9.352263418057323
},
{
  "frequencyRange": {
    "highFrequency": 6205,
    "lowFrequency": 6185
  },
  "maxPsd": 12.40878234232943
},
{
  "frequencyRange": {
    "highFrequency": 6225,
    "lowFrequency": 6205
  },
  "maxPsd": 18.82300848532484
},
{
  "frequencyRange": {
    "highFrequency": 6245,
    "lowFrequency": 6225
  },
  "maxPsd": 16.26779273050075
},
{
  "frequencyRange": {
```

```
        "highFrequency": 6265,
        "lowFrequency": 6245
    },
    "maxPsd": 13.262654233370952
},
{
    "frequencyRange": {
        "highFrequency": 6605,
        "lowFrequency": 6585
    },
    "maxPsd": 12.135872692509082
},
{
    "frequencyRange": {
        "highFrequency": 6625,
        "lowFrequency": 6605
    },
    "maxPsd": 11.61973772683589
},
{
    "frequencyRange": {
        "highFrequency": 6645,
        "lowFrequency": 6625
    },
    "maxPsd": 9.990221958256633
},
{
    "frequencyRange": {
        "highFrequency": 6665,
        "lowFrequency": 6645
    },
    "maxPsd": 16.362083991752385
},
{
    "frequencyRange": {
        "highFrequency": 6685,
        "lowFrequency": 6665
```





```
    },
    "maxPsd": 18.93019798361631
  },
  {
    "frequencyRange": {
      "highFrequency": 6705,
      "lowFrequency": 6685
    },
    "maxPsd": 10.475042650631009
  },
  {
    "frequencyRange": {
      "highFrequency": 6725,
      "lowFrequency": 6705
    },
    "maxPsd": 10.345621361707902
  },
  {
    "frequencyRange": {
      "highFrequency": 6745,
      "lowFrequency": 6725
    },
    "maxPsd": 20.829420724702754
  }
],
"requestId": "367865613",
"availabilityExpireTime": "2023-09-27T08:12:38Z",
"rulesetId": "US_47_CFR_PART_15_SUBPART_E"
}
],
"version": "1.4"
}
```

##### 2023-09-26T08:23:47Z #####

```
{
  "headers": {
    "Host": "testserver.wfatestorg.org",
```

```
"Accept": "*/*",
"Content-Type": "application/json",
"X-Forwarded-For": "192.168.0.1",
"X-Forwarded-Host": "testserver.wfatestorg.org",
"X-Forwarded-Server": "testserver.wfatestorg.org",
"Content-Length": "727",
"Connection": "Keep-Alive"
},
"body": {
  "version": "1.4",
  "availableSpectrumInquiryRequests": [
    {
      "requestId": "2855751972",
      "deviceDescriptor": {
        "serialNumber": "E8YG05QKH41H",
        "rulesetIds": [
          "US_47_CFR_PART_15_SUBPART_E"
        ],
        "certificationId": [
          {
            "nra": [
              "FCC"
            ],
            "id": [
              "Z8H89FT0068"
            ],
            "rulesetId": "US_47_CFR_PART_15_SUBPART_E"
          }
        ]
      },
      "location": {
        "ellipse": {
          "center": {
            "longitude": -78.589081,
            "latitude": 43.099789
          },
          "majorAxis": 11,
```



```
        "minorAxis": 11,
        "orientation": 0
    },
    "elevation": {
        "height": 208,
        "heightType": "AMSL",
        "verticalUncertainty": 9
    },
    "indoorDeployment": 2
},
"inquiredFrequencyRange": [
    {
        "lowFrequency": 5925,
        "highFrequency": 6425
    },
    {
        "lowFrequency": 6525,
        "highFrequency": 6875
    }
],
"minDesiredPower": 10
}
]
}
}
```

##### 2023-09-26T08:23:47Z #####

```
{
  "availableSpectrumInquiryResponses": [
    {
      "response": {
        "responseCode": 0,
        "shortDescription": "SUCCESS"
      },
      "availableFrequencyInfo": [
        {
          "frequencyRange": {
```

```
        "highFrequency": 6285,
        "lowFrequency": 6265
    },
    "maxPsd": 13.232898850160973
},
{
    "frequencyRange": {
        "highFrequency": 6305,
        "lowFrequency": 6285
    },
    "maxPsd": 9.39584831817891
},
{
    "frequencyRange": {
        "highFrequency": 6325,
        "lowFrequency": 6305
    },
    "maxPsd": 18.16563705481611
},
{
    "frequencyRange": {
        "highFrequency": 6345,
        "lowFrequency": 6325
    },
    "maxPsd": 21.625343302460195
},
{
    "frequencyRange": {
        "highFrequency": 6365,
        "lowFrequency": 6345
    },
    "maxPsd": 11.206004123525714
},
{
    "frequencyRange": {
        "highFrequency": 6385,
        "lowFrequency": 6365
```

```
    },
    "maxPsd": 13.817489649325163
  },
  {
    "frequencyRange": {
      "highFrequency": 6405,
      "lowFrequency": 6385
    },
    "maxPsd": 19.75289535030145
  },
  {
    "frequencyRange": {
      "highFrequency": 6425,
      "lowFrequency": 6405
    },
    "maxPsd": 11.492641151774652
  }
],
"requestId": "2855751972",
"availabilityExpireTime": "2023-09-27T08:23:47Z",
"rulesetId": "US_47_CFR_PART_15_SUBPART_E"
}
],
"version": "1.4"
}
```



CT\_AFC\_SP\_AP\_AFCRSA31\_Frequency\_40MHz\_10612\_1

##### 2023-09-26T08:35:37Z #####

```
{
  "headers": {
    "Host": "testserver.wfatestorg.org",
    "Accept": "*/*",
    "Content-Type": "application/json",
    "X-Forwarded-For": "192.168.0.1",
    "X-Forwarded-Host": "testserver.wfatestorg.org",
    "X-Forwarded-Server": "testserver.wfatestorg.org",
    "Content-Length": "726",
    "Connection": "Keep-Alive"
  },
  "body": {
    "version": "1.4",
    "availableSpectrumInquiryRequests": [
      {
        "requestId": "367893499",
        "deviceDescriptor": {
          "serialNumber": "E8YG05QKH41H",
          "rulesetIds": [
            "US_47_CFR_PART_15_SUBPART_E"
          ],
          "certificationId": [
            {
              "nra": [
                "FCC"
              ],
              "id": [
                "Z8H89FT0068"
              ],
              "rulesetId": "US_47_CFR_PART_15_SUBPART_E"
            }
          ]
        },
        "location": {
          "ellipse": {
```



```
        "center": {
            "longitude": -78.588982,
            "latitude": 43.099728
        },
        "majorAxis": 41,
        "minorAxis": 41,
        "orientation": 0
    },
    "elevation": {
        "height": 212,
        "heightType": "AMSL",
        "verticalUncertainty": 9
    },
    "indoorDeployment": 2
},
"inquiredFrequencyRange": [
    {
        "lowFrequency": 5925,
        "highFrequency": 6425
    },
    {
        "lowFrequency": 6525,
        "highFrequency": 6875
    }
],
"minDesiredPower": 10
}
]
}
```

```
##### 2023-09-26T08:35:38Z #####
{
    "availableSpectrumInquiryResponses": [
        {
            "response": {
                "responseCode": 0,
```

```
"shortDescription": "SUCCESS"
},
"availableFrequencyInfo": [
  {
    "frequencyRange": {
      "highFrequency": 6605,
      "lowFrequency": 6585
    },
    "maxPsd": 17.25246360190765
  },
  {
    "frequencyRange": {
      "highFrequency": 6625,
      "lowFrequency": 6605
    },
    "maxPsd": 9.625681728681098
  },
  {
    "frequencyRange": {
      "highFrequency": 6645,
      "lowFrequency": 6625
    },
    "maxPsd": 11.402722469109008
  },
  {
    "frequencyRange": {
      "highFrequency": 6665,
      "lowFrequency": 6645
    },
    "maxPsd": 18.34467819930918
  },
  {
    "frequencyRange": {
      "highFrequency": 6685,
      "lowFrequency": 6665
    },
    "maxPsd": 20.839057000448598
  }
]
```





```
    },
    {
      "frequencyRange": {
        "highFrequency": 6705,
        "lowFrequency": 6685
      },
      "maxPsd": 15.914352762949747
    },
    {
      "frequencyRange": {
        "highFrequency": 6725,
        "lowFrequency": 6705
      },
      "maxPsd": 8.162437260005532
    },
    {
      "frequencyRange": {
        "highFrequency": 6745,
        "lowFrequency": 6725
      },
      "maxPsd": 12.881002519380425
    }
  ],
  "requestId": "367893499",
  "availabilityExpireTime": "2023-09-27T08:35:38Z",
  "rulesetId": "US_47_CFR_PART_15_SUBPART_E"
}
],
"version": "1.4"
}
```

```
##### 2023-09-26T08:40:28Z #####
{
  "headers": {
    "Host": "testserver.wfatestorg.org",
    "Accept": "*/*",
    "Content-Type": "application/json",
```

```
"X-Forwarded-For": "192.168.0.1",
"X-Forwarded-Host": "testserver.wfatestorg.org",
"X-Forwarded-Server": "testserver.wfatestorg.org",
"Content-Length": "727",
"Connection": "Keep-Alive"
},
"body": {
  "version": "1.4",
  "availableSpectrumInquiryRequests": [
    {
      "requestId": "1059855378",
      "deviceDescriptor": {
        "serialNumber": "E8YG05QKH41H",
        "rulesetIds": [
          "US_47_CFR_PART_15_SUBPART_E"
        ],
        "certificationId": [
          {
            "nra": [
              "FCC"
            ],
            "id": [
              "Z8H89FT0068"
            ],
            "rulesetId": "US_47_CFR_PART_15_SUBPART_E"
          }
        ]
      }
    }
  ],
  "location": {
    "ellipse": {
      "center": {
        "longitude": -78.589172,
        "latitude": 43.09985
      },
      "majorAxis": 47,
      "minorAxis": 47,
      "orientation": 0
    }
  }
}
```



```
    },
    "elevation": {
      "height": 211,
      "heightType": "AMSL",
      "verticalUncertainty": 9
    },
    "indoorDeployment": 2
  },
  "inquiredFrequencyRange": [
    {
      "lowFrequency": 5925,
      "highFrequency": 6425
    },
    {
      "lowFrequency": 6525,
      "highFrequency": 6875
    }
  ],
  "minDesiredPower": 10
}
]
}
```

##### 2023-09-26T08:40:28Z #####

```
{
  "availableSpectrumInquiryResponses": [
    {
      "response": {
        "responseCode": 0,
        "shortDescription": "SUCCESS"
      },
      "availableFrequencyInfo": [
        {
          "frequencyRange": {
            "highFrequency": 5965,
            "lowFrequency": 5945
```

```
    },
    "maxPsd": 11.941220658673544
  },
  {
    "frequencyRange": {
      "highFrequency": 5985,
      "lowFrequency": 5965
    },
    "maxPsd": 10.870454775173243
  },
  {
    "frequencyRange": {
      "highFrequency": 6005,
      "lowFrequency": 5985
    },
    "maxPsd": 10.727609939034819
  },
  {
    "frequencyRange": {
      "highFrequency": 6025,
      "lowFrequency": 6005
    },
    "maxPsd": 9.824855991156118
  },
  {
    "frequencyRange": {
      "highFrequency": 6045,
      "lowFrequency": 6025
    },
    "maxPsd": 11.709283376852783
  },
  {
    "frequencyRange": {
      "highFrequency": 6065,
      "lowFrequency": 6045
    },
    "maxPsd": 14.917052739800951
  }
```

```
},
{
  "frequencyRange": {
    "highFrequency": 6085,
    "lowFrequency": 6065
  },
  "maxPsd": 18.566117491328647
},
{
  "frequencyRange": {
    "highFrequency": 6105,
    "lowFrequency": 6085
  },
  "maxPsd": 12.21517296453245
},
{
  "frequencyRange": {
    "highFrequency": 6125,
    "lowFrequency": 6105
  },
  "maxPsd": 9.763599453278745
},
{
  "frequencyRange": {
    "highFrequency": 6145,
    "lowFrequency": 6125
  },
  "maxPsd": 17.19483172287728
},
{
  "frequencyRange": {
    "highFrequency": 6165,
    "lowFrequency": 6145
  },
  "maxPsd": 14.388766574062533
},
{

```

```
"frequencyRange": {
  "highFrequency": 6185,
  "lowFrequency": 6165
},
"maxPsd": 20.2424645687583
},
{
  "frequencyRange": {
    "highFrequency": 6205,
    "lowFrequency": 6185
  },
  "maxPsd": 9.299748603370631
},
{
  "frequencyRange": {
    "highFrequency": 6225,
    "lowFrequency": 6205
  },
  "maxPsd": 19.946824658195712
},
{
  "frequencyRange": {
    "highFrequency": 6245,
    "lowFrequency": 6225
  },
  "maxPsd": 10.434247138240266
},
{
  "frequencyRange": {
    "highFrequency": 6265,
    "lowFrequency": 6245
  },
  "maxPsd": 21.101160803338125
},
{
  "frequencyRange": {
    "highFrequency": 6285,
```

```
        "lowFrequency": 6265
      },
      "maxPsd": 20.774522889599925
    },
    {
      "frequencyRange": {
        "highFrequency": 6305,
        "lowFrequency": 6285
      },
      "maxPsd": 10.638619475132067
    },
    {
      "frequencyRange": {
        "highFrequency": 6325,
        "lowFrequency": 6305
      },
      "maxPsd": 14.9593659856029
    },
    {
      "frequencyRange": {
        "highFrequency": 6345,
        "lowFrequency": 6325
      },
      "maxPsd": 12.061255019052915
    },
    {
      "frequencyRange": {
        "highFrequency": 6365,
        "lowFrequency": 6345
      },
      "maxPsd": 18.416316873822858
    },
    {
      "frequencyRange": {
        "highFrequency": 6385,
        "lowFrequency": 6365
      },
    },
```

```
    "maxPsd": 10.969609624325226
  },
  {
    "frequencyRange": {
      "highFrequency": 6405,
      "lowFrequency": 6385
    },
    "maxPsd": 15.156605575319013
  },
  {
    "frequencyRange": {
      "highFrequency": 6425,
      "lowFrequency": 6405
    },
    "maxPsd": 13.72754505737922
  }
],
"requestId": "1059855378",
"availabilityExpireTime": "2023-09-27T08:40:28Z",
"rulesetId": "US_47_CFR_PART_15_SUBPART_E"
}
],
"version": "1.4"
}
```





CT\_AFC\_SP\_AP\_AFCRSA31\_Frequency\_80MHz\_10613\_1

##### 2023-09-26T08:54:27Z #####

```
{
  "headers": {
    "Host": "testserver.wfatestorg.org",
    "Accept": "*/*",
    "Content-Type": "application/json",
    "X-Forwarded-For": "192.168.0.1",
    "X-Forwarded-Host": "testserver.wfatestorg.org",
    "X-Forwarded-Server": "testserver.wfatestorg.org",
    "Content-Length": "728",
    "Connection": "Keep-Alive"
  },
  "body": {
    "version": "1.4",
    "availableSpectrumInquiryRequests": [
      {
        "requestId": "3647414315",
        "deviceDescriptor": {
          "serialNumber": "E8YG05QKH41H",
          "rulesetIds": [
            "US_47_CFR_PART_15_SUBPART_E"
          ],
          "certificationId": [
            {
              "nra": [
                "FCC"
              ],
              "id": [
                "Z8H89FT0068"
              ],
              "rulesetId": "US_47_CFR_PART_15_SUBPART_E"
            }
          ]
        },
        "location": {
          "ellipse": {
```



```
        "center": {
            "longitude": -78.589119,
            "latitude": 43.099789
        },
        "majorAxis": 14,
        "minorAxis": 14,
        "orientation": 0
    },
    "elevation": {
        "height": 202,
        "heightType": "AMSL",
        "verticalUncertainty": 16
    },
    "indoorDeployment": 2
},
"inquiredFrequencyRange": [
    {
        "lowFrequency": 5925,
        "highFrequency": 6425
    },
    {
        "lowFrequency": 6525,
        "highFrequency": 6875
    }
],
"minDesiredPower": 10
}
]
}
```

```
##### 2023-09-26T08:54:27Z #####
{
    "availableSpectrumInquiryResponses": [
        {
            "response": {
                "responseCode": 0,
```

```
"shortDescription": "SUCCESS"
},
"availableFrequencyInfo": [
  {
    "frequencyRange": {
      "highFrequency": 6605,
      "lowFrequency": 6585
    },
    "maxPsd": 13.352415645736738
  },
  {
    "frequencyRange": {
      "highFrequency": 6625,
      "lowFrequency": 6605
    },
    "maxPsd": 21.192338393192728
  },
  {
    "frequencyRange": {
      "highFrequency": 6645,
      "lowFrequency": 6625
    },
    "maxPsd": 19.74281897257356
  },
  {
    "frequencyRange": {
      "highFrequency": 6665,
      "lowFrequency": 6645
    },
    "maxPsd": 10.60152771305199
  },
  {
    "frequencyRange": {
      "highFrequency": 6685,
      "lowFrequency": 6665
    },
    "maxPsd": 21.527920269800205
  }
]
```



```
    },
    {
      "frequencyRange": {
        "highFrequency": 6705,
        "lowFrequency": 6685
      },
      "maxPsd": 14.283960691298445
    },
    {
      "frequencyRange": {
        "highFrequency": 6725,
        "lowFrequency": 6705
      },
      "maxPsd": 14.36271914071853
    },
    {
      "frequencyRange": {
        "highFrequency": 6745,
        "lowFrequency": 6725
      },
      "maxPsd": 11.969665864571661
    }
  ],
  "requestId": "3647414315",
  "availabilityExpireTime": "2023-09-27T08:54:27Z",
  "rulesetId": "US_47_CFR_PART_15_SUBPART_E"
}
],
"version": "1.4"
}
```

```
##### 2023-09-26T08:58:37Z #####
{
  "headers": {
    "Host": "testserver.wfatestorg.org",
    "Accept": "*/*",
    "Content-Type": "application/json",
```

```
"X-Forwarded-For": "192.168.0.1",
"X-Forwarded-Host": "testserver.wfatestorg.org",
"X-Forwarded-Server": "testserver.wfatestorg.org",
"Content-Length": "728",
"Connection": "Keep-Alive"
},
"body": {
  "version": "1.4",
  "availableSpectrumInquiryRequests": [
    {
      "requestId": "1825557630",
      "deviceDescriptor": {
        "serialNumber": "E8YG05QKH41H",
        "rulesetIds": [
          "US_47_CFR_PART_15_SUBPART_E"
        ],
        "certificationId": [
          {
            "nra": [
              "FCC"
            ],
            "id": [
              "Z8H89FT0068"
            ],
            "rulesetId": "US_47_CFR_PART_15_SUBPART_E"
          }
        ]
      }
    ]
  },
  "location": {
    "ellipse": {
      "center": {
        "longitude": -78.589119,
        "latitude": 43.099789
      },
      "majorAxis": 14,
      "minorAxis": 14,
      "orientation": 0
    }
  }
}
```



```
    },
    "elevation": {
      "height": 202,
      "heightType": "AMSL",
      "verticalUncertainty": 16
    },
    "indoorDeployment": 2
  },
  "inquiredFrequencyRange": [
    {
      "lowFrequency": 5925,
      "highFrequency": 6425
    },
    {
      "lowFrequency": 6525,
      "highFrequency": 6875
    }
  ],
  "minDesiredPower": 10
}
]
}
```

##### 2023-09-26T08:58:38Z #####

```
{
  "availableSpectrumInquiryResponses": [
    {
      "response": {
        "responseCode": 0,
        "shortDescription": "SUCCESS"
      },
      "availableFrequencyInfo": [
        {
          "frequencyRange": {
            "highFrequency": 5965,
            "lowFrequency": 5945
          }
        }
      ]
    }
  ]
}
```

```
    },
    "maxPsd": 19.89260938634724
  },
  {
    "frequencyRange": {
      "highFrequency": 5985,
      "lowFrequency": 5965
    },
    "maxPsd": 13.14442176016082
  },
  {
    "frequencyRange": {
      "highFrequency": 6005,
      "lowFrequency": 5985
    },
    "maxPsd": 21.987292692808342
  },
  {
    "frequencyRange": {
      "highFrequency": 6025,
      "lowFrequency": 6005
    },
    "maxPsd": 21.40361206471981
  },
  {
    "frequencyRange": {
      "highFrequency": 6045,
      "lowFrequency": 6025
    },
    "maxPsd": 12.42425449416301
  },
  {
    "frequencyRange": {
      "highFrequency": 6065,
      "lowFrequency": 6045
    },
    "maxPsd": 17.3245528150482
  }
```

```
},
{
  "frequencyRange": {
    "highFrequency": 6085,
    "lowFrequency": 6065
  },
  "maxPsd": 19.44659883146312
},
{
  "frequencyRange": {
    "highFrequency": 6105,
    "lowFrequency": 6085
  },
  "maxPsd": 11.450019214717667
},
{
  "frequencyRange": {
    "highFrequency": 6125,
    "lowFrequency": 6105
  },
  "maxPsd": 18.855435307605294
},
{
  "frequencyRange": {
    "highFrequency": 6145,
    "lowFrequency": 6125
  },
  "maxPsd": 20.15703855769614
},
{
  "frequencyRange": {
    "highFrequency": 6165,
    "lowFrequency": 6145
  },
  "maxPsd": 10.722369115867945
},
{
```



```
"frequencyRange": {
  "highFrequency": 6185,
  "lowFrequency": 6165
},
"maxPsd": 9.674837993354942
},
{
  "frequencyRange": {
    "highFrequency": 6205,
    "lowFrequency": 6185
  },
  "maxPsd": 19.9122174488811
},
{
  "frequencyRange": {
    "highFrequency": 6225,
    "lowFrequency": 6205
  },
  "maxPsd": 12.290773695371636
},
{
  "frequencyRange": {
    "highFrequency": 6245,
    "lowFrequency": 6225
  },
  "maxPsd": 17.526133848572847
},
{
  "frequencyRange": {
    "highFrequency": 6265,
    "lowFrequency": 6245
  },
  "maxPsd": 12.82434845941831
},
{
  "frequencyRange": {
    "highFrequency": 6285,
```

```
        "lowFrequency": 6265
      },
      "maxPsd": 11.293394804312987
    },
    {
      "frequencyRange": {
        "highFrequency": 6305,
        "lowFrequency": 6285
      },
      "maxPsd": 8.51710672106609
    },
    {
      "frequencyRange": {
        "highFrequency": 6325,
        "lowFrequency": 6305
      },
      "maxPsd": 20.13000712365644
    },
    {
      "frequencyRange": {
        "highFrequency": 6345,
        "lowFrequency": 6325
      },
      "maxPsd": 13.41725203724262
    },
    {
      "frequencyRange": {
        "highFrequency": 6365,
        "lowFrequency": 6345
      },
      "maxPsd": 18.289193415394223
    },
    {
      "frequencyRange": {
        "highFrequency": 6385,
        "lowFrequency": 6365
      },
    },
```

```
    "maxPsd": 14.899042692397085
  },
  {
    "frequencyRange": {
      "highFrequency": 6405,
      "lowFrequency": 6385
    },
    "maxPsd": 14.949180349696832
  },
  {
    "frequencyRange": {
      "highFrequency": 6425,
      "lowFrequency": 6405
    },
    "maxPsd": 21.293592422345196
  }
],
"requestId": "1825557630",
"availabilityExpireTime": "2023-09-27T08:58:37Z",
"rulesetId": "US_47_CFR_PART_15_SUBPART_E"
}
],
"version": "1.4"
}
```



CT\_AFC\_SP\_AP\_AFCRSA31\_Frequency\_160MHz\_10614\_1

##### 2023-09-26T09:04:59Z #####

```
{
  "headers": {
    "Host": "testserver.wfatestorg.org",
    "Accept": "*/*",
    "Content-Type": "application/json",
    "X-Forwarded-For": "192.168.0.1",
    "X-Forwarded-Host": "testserver.wfatestorg.org",
    "X-Forwarded-Server": "testserver.wfatestorg.org",
    "Content-Length": "716",
    "Connection": "Keep-Alive"
  },
  "body": {
    "version": "1.4",
    "availableSpectrumInquiryRequests": [
      {
        "requestId": "67884844",
        "deviceDescriptor": {
          "serialNumber": "E8YG05QKH41H",
          "rulesetIds": [
            "US_47_CFR_PART_15_SUBPART_E"
          ],
          "certificationId": [
            {
              "nra": [
                "FCC"
              ],
              "id": [
                "Z8H89FT0068"
              ],
              "rulesetId": "US_47_CFR_PART_15_SUBPART_E"
            }
          ]
        },
        "location": {
          "ellipse": {
```



```
        "center": {
            "longitude": -78.589005,
            "latitude": 43.099808
        },
        "majorAxis": 10,
        "minorAxis": 10,
        "orientation": 0
    },
    "elevation": {
        "height": 220,
        "heightType": "AMSL",
        "verticalUncertainty": 9
    },
    "indoorDeployment": 2
},
"inquiredFrequencyRange": [
    {
        "lowFrequency": 5925,
        "highFrequency": 6425
    },
    {
        "lowFrequency": 6525,
        "highFrequency": 6875
    }
],
"minDesiredPower": 10
}
]
}
```

```
##### 2023-09-26T09:04:59Z #####
{
    "availableSpectrumInquiryResponses": [
        {
            "response": {
                "responseCode": 0,
```



```
    "shortDescription": "SUCCESS"
  },
  "availableFrequencyInfo": [],
  "availableChannelInfo": [],
  "requestId": "67884844",
  "availabilityExpireTime": "2023-09-27T09:04:59Z",
  "rulesetId": "US_47_CFR_PART_15_SUBPART_E"
}
],
"version": "1.4"
}
```

##### 2023-09-26T09:14:15Z #####

```
{
  "headers": {
    "Host": "testserver.wfatestorg.org",
    "Accept": "*/*",
    "Content-Type": "application/json",
    "X-Forwarded-For": "192.168.0.1",
    "X-Forwarded-Host": "testserver.wfatestorg.org",
    "X-Forwarded-Server": "testserver.wfatestorg.org",
    "Content-Length": "716",
    "Connection": "Keep-Alive"
  },
  "body": {
    "version": "1.4",
    "availableSpectrumInquiryRequests": [
      {
        "requestId": "67812871",
        "deviceDescriptor": {
          "serialNumber": "E8YG05QKH41H",
          "rulesetIds": [
            "US_47_CFR_PART_15_SUBPART_E"
          ],
          "certificationId": [
            {
              "nra": [
```

```
        "FCC"
      ],
      "id": [
        "Z8H89FT0068"
      ],
      "rulesetId": "US_47_CFR_PART_15_SUBPART_E"
    }
  ]
},
"location": {
  "ellipse": {
    "center": {
      "longitude": -78.589043,
      "latitude": 43.099815
    },
    "majorAxis": 10,
    "minorAxis": 10,
    "orientation": 0
  },
  "elevation": {
    "height": 213,
    "heightType": "AMSL",
    "verticalUncertainty": 9
  },
  "indoorDeployment": 2
},
"inquiredFrequencyRange": [
  {
    "lowFrequency": 5925,
    "highFrequency": 6425
  },
  {
    "lowFrequency": 6525,
    "highFrequency": 6875
  }
],
"minDesiredPower": 10
```



```
    }
  ]
}
}
```

##### 2023-09-26T09:14:15Z #####

```
{
  "availableSpectrumInquiryResponses": [
    {
      "response": {
        "responseCode": 0,
        "shortDescription": "SUCCESS"
      },
      "availableFrequencyInfo": [],
      "availableChannelInfo": [],
      "requestId": "67812871",
      "availabilityExpireTime": "2023-09-27T09:14:15Z",
      "rulesetId": "US_47_CFR_PART_15_SUBPART_E"
    }
  ],
  "version": "1.4"
}
```

##### 2023-09-26T09:16:23Z #####

```
{
  "headers": {
    "Host": "testserver.wfatestorg.org",
    "Accept": "*/*",
    "Content-Type": "application/json",
    "X-Forwarded-For": "192.168.0.1",
    "X-Forwarded-Host": "testserver.wfatestorg.org",
    "X-Forwarded-Server": "testserver.wfatestorg.org",
    "Content-Length": "719",
    "Connection": "Keep-Alive"
  },
  "body": {
    "version": "1.4",
```



```
"availableSpectrumInquiryRequests": [  
  {  
    "requestId": "2551335080",  
    "deviceDescriptor": {  
      "serialNumber": "E8YG05QKH41H",  
      "rulesetIds": [  
        "US_47_CFR_PART_15_SUBPART_E"  
      ],  
      "certificationId": [  
        {  
          "nra": [  
            "FCC"  
          ],  
          "id": [  
            "Z8H89FT0068"  
          ],  
          "rulesetId": "US_47_CFR_PART_15_SUBPART_E"  
        }  
      ]  
    },  
    "location": {  
      "ellipse": {  
        "center": {  
          "longitude": -78.589073,  
          "latitude": 43.099812  
        },  
        "majorAxis": 15,  
        "minorAxis": 15,  
        "orientation": 0  
      },  
      "elevation": {  
        "height": 207,  
        "heightType": "AMSL",  
        "verticalUncertainty": 10  
      },  
      "indoorDeployment": 2  
    }  
  },  
]
```



```
"inquiredFrequencyRange": [  
  {  
    "lowFrequency": 5925,  
    "highFrequency": 6425  
  },  
  {  
    "lowFrequency": 6525,  
    "highFrequency": 6875  
  }  
],  
"minDesiredPower": 10  
}  
]  
}
```

##### 2023-09-26T09:16:23Z #####

```
{  
  "availableSpectrumInquiryResponses": [  
    {  
      "response": {  
        "responseCode": 0,  
        "shortDescription": "SUCCESS"  
      },  
      "availableFrequencyInfo": [  
        {  
          "frequencyRange": {  
            "highFrequency": 6285,  
            "lowFrequency": 6265  
          },  
          "maxPsd": 11.005221205502263  
        },  
        {  
          "frequencyRange": {  
            "highFrequency": 6305,  
            "lowFrequency": 6285  
          },  
        }  
      ]  
    }  
  ]  
}
```

```
"maxPsd": 9.598758954514926
},
{
  "frequencyRange": {
    "highFrequency": 6325,
    "lowFrequency": 6305
  },
  "maxPsd": 15.0439619217194
},
{
  "frequencyRange": {
    "highFrequency": 6345,
    "lowFrequency": 6325
  },
  "maxPsd": 10.770859219242737
},
{
  "frequencyRange": {
    "highFrequency": 6365,
    "lowFrequency": 6345
  },
  "maxPsd": 9.476848113772082
},
{
  "frequencyRange": {
    "highFrequency": 6385,
    "lowFrequency": 6365
  },
  "maxPsd": 14.966434489971505
},
{
  "frequencyRange": {
    "highFrequency": 6405,
    "lowFrequency": 6385
  },
  "maxPsd": 17.77852897985749
},
},
```

```
{
  "frequencyRange": {
    "highFrequency": 6425,
    "lowFrequency": 6405
  },
  "maxPsd": 17.03441013656621
}
],
"requestId": "2551335080",
"availabilityExpireTime": "2023-09-27T09:16:23Z",
"rulesetId": "US_47_CFR_PART_15_SUBPART_E"
}
],
"version": "1.4"
}
```

##### 2023-09-26T09:20:16Z #####

```
{
  "headers": {
    "Host": "testserver.wfatestorg.org",
    "Accept": "*/*",
    "Content-Type": "application/json",
    "X-Forwarded-For": "192.168.0.1",
    "X-Forwarded-Host": "testserver.wfatestorg.org",
    "X-Forwarded-Server": "testserver.wfatestorg.org",
    "Content-Length": "719",
    "Connection": "Keep-Alive"
  },
  "body": {
    "version": "1.4",
    "availableSpectrumInquiryRequests": [
      {
        "requestId": "1078058133",
        "deviceDescriptor": {
          "serialNumber": "E8YG05QKH41H",
          "rulesetIds": [
            "US_47_CFR_PART_15_SUBPART_E"
          ]
        }
      }
    ]
  }
}
```

```
],
  "certificationId": [
    {
      "nra": [
        "FCC"
      ],
      "id": [
        "Z8H89FT0068"
      ],
      "rulesetId": "US_47_CFR_PART_15_SUBPART_E"
    }
  ]
},
"location": {
  "ellipse": {
    "center": {
      "longitude": -78.589073,
      "latitude": 43.099812
    },
    "majorAxis": 14,
    "minorAxis": 14,
    "orientation": 0
  },
  "elevation": {
    "height": 207,
    "heightType": "AMSL",
    "verticalUncertainty": 10
  },
  "indoorDeployment": 2
},
"inquiredFrequencyRange": [
  {
    "lowFrequency": 5925,
    "highFrequency": 6425
  },
  {
    "lowFrequency": 6525,
```



```
        "highFrequency": 6875
      }
    ],
    "minDesiredPower": 10
  }
]
}
}
```

##### 2023-09-26T09:20:16Z #####

```
{
  "availableSpectrumInquiryResponses": [
    {
      "response": {
        "responseCode": 0,
        "shortDescription": "SUCCESS"
      },
      "availableFrequencyInfo": [
        {
          "frequencyRange": {
            "highFrequency": 5965,
            "lowFrequency": 5945
          },
          "maxPsd": 11.547891495024682
        },
        {
          "frequencyRange": {
            "highFrequency": 5985,
            "lowFrequency": 5965
          },
          "maxPsd": 13.697308629427038
        },
        {
          "frequencyRange": {
            "highFrequency": 6005,
            "lowFrequency": 5985
          },

```

```
"maxPsd": 16.796172753101516
},
{
  "frequencyRange": {
    "highFrequency": 6025,
    "lowFrequency": 6005
  },
  "maxPsd": 13.414467811359305
},
{
  "frequencyRange": {
    "highFrequency": 6045,
    "lowFrequency": 6025
  },
  "maxPsd": 15.757297519388109
},
{
  "frequencyRange": {
    "highFrequency": 6065,
    "lowFrequency": 6045
  },
  "maxPsd": 19.3810409602344
},
{
  "frequencyRange": {
    "highFrequency": 6085,
    "lowFrequency": 6065
  },
  "maxPsd": 10.383187974599048
},
{
  "frequencyRange": {
    "highFrequency": 6105,
    "lowFrequency": 6085
  },
  "maxPsd": 17.51581609459653
},
},
```

```
{
  "frequencyRange": {
    "highFrequency": 6125,
    "lowFrequency": 6105
  },
  "maxPsd": 19.37324960619482
},
{
  "frequencyRange": {
    "highFrequency": 6145,
    "lowFrequency": 6125
  },
  "maxPsd": 10.19628035275408
},
{
  "frequencyRange": {
    "highFrequency": 6165,
    "lowFrequency": 6145
  },
  "maxPsd": 8.568869284457458
},
{
  "frequencyRange": {
    "highFrequency": 6185,
    "lowFrequency": 6165
  },
  "maxPsd": 19.28871454591779
},
{
  "frequencyRange": {
    "highFrequency": 6205,
    "lowFrequency": 6185
  },
  "maxPsd": 11.302587222663234
},
{
  "frequencyRange": {
```



```
        "highFrequency": 6225,
        "lowFrequency": 6205
    },
    "maxPsd": 9.034385948201429
},
{
    "frequencyRange": {
        "highFrequency": 6245,
        "lowFrequency": 6225
    },
    "maxPsd": 20.802945933950163
},
{
    "frequencyRange": {
        "highFrequency": 6265,
        "lowFrequency": 6245
    },
    "maxPsd": 13.856921644507548
},
{
    "frequencyRange": {
        "highFrequency": 6605,
        "lowFrequency": 6585
    },
    "maxPsd": 12.50570499354154
},
{
    "frequencyRange": {
        "highFrequency": 6625,
        "lowFrequency": 6605
    },
    "maxPsd": 9.631058842437072
},
{
    "frequencyRange": {
        "highFrequency": 6645,
        "lowFrequency": 6625
```

```
    },
    "maxPsd": 16.627389498060143
  },
  {
    "frequencyRange": {
      "highFrequency": 6665,
      "lowFrequency": 6645
    },
    "maxPsd": 19.161721036935678
  },
  {
    "frequencyRange": {
      "highFrequency": 6685,
      "lowFrequency": 6665
    },
    "maxPsd": 9.915677665537096
  },
  {
    "frequencyRange": {
      "highFrequency": 6705,
      "lowFrequency": 6685
    },
    "maxPsd": 8.286044339430545
  },
  {
    "frequencyRange": {
      "highFrequency": 6725,
      "lowFrequency": 6705
    },
    "maxPsd": 21.598828084840946
  },
  {
    "frequencyRange": {
      "highFrequency": 6745,
      "lowFrequency": 6725
    },
    "maxPsd": 10.214137298395617
  }
```



```
    }  
  ],  
  "requestId": "1078058133",  
  "availabilityExpireTime": "2023-09-27T09:20:16Z",  
  "rulesetId": "US_47_CFR_PART_15_SUBPART_E"  
}  
],  
"version": "1.4"  
}
```



CT\_AFC\_SP\_AP\_AFCDUSA32\_Frequency\_10615\_1

##### 2023-09-26T09:26:47Z #####

```
{
  "headers": {
    "Host": "testserver.wfatestorg.org",
    "Accept": "*/*",
    "Content-Type": "application/json",
    "X-Forwarded-For": "192.168.0.1",
    "X-Forwarded-Host": "testserver.wfatestorg.org",
    "X-Forwarded-Server": "testserver.wfatestorg.org",
    "Content-Length": "717",
    "Connection": "Keep-Alive"
  },
  "body": {
    "version": "1.4",
    "availableSpectrumInquiryRequests": [
      {
        "requestId": "65460393",
        "deviceDescriptor": {
          "serialNumber": "E8YG05QKH41H",
          "rulesetIds": [
            "US_47_CFR_PART_15_SUBPART_E"
          ],
          "certificationId": [
            {
              "nra": [
                "FCC"
              ],
              "id": [
                "Z8H89FT0068"
              ],
              "rulesetId": "US_47_CFR_PART_15_SUBPART_E"
            }
          ]
        },
        "location": {
          "ellipse": {
```



```
        "center": {
            "longitude": -78.589157,
            "latitude": 43.099842
        },
        "majorAxis": 14,
        "minorAxis": 14,
        "orientation": 0
    },
    "elevation": {
        "height": 197,
        "heightType": "AMSL",
        "verticalUncertainty": 10
    },
    "indoorDeployment": 2
},
"inquiredFrequencyRange": [
    {
        "lowFrequency": 5925,
        "highFrequency": 6425
    },
    {
        "lowFrequency": 6525,
        "highFrequency": 6875
    }
],
"minDesiredPower": 10
}
]
}
```

```
##### 2023-09-26T09:26:47Z #####
{
    "availableSpectrumInquiryResponses": [
        {
            "response": {
                "responseCode": 0,
```



```
    "shortDescription": "SUCCESS"
  },
  "availableFrequencyInfo": [],
  "availableChannelInfo": [],
  "requestId": "65460393",
  "availabilityExpireTime": "2023-09-27T09:26:47Z",
  "rulesetId": "US_47_CFR_PART_15_SUBPART_E"
}
],
"version": "1.4"
}
```

##### 2023-09-26T09:30:15Z #####

```
{
  "headers": {
    "Host": "testserver.wfatestorg.org",
    "Accept": "*/*",
    "Content-Type": "application/json",
    "X-Forwarded-For": "192.168.0.1",
    "X-Forwarded-Host": "testserver.wfatestorg.org",
    "X-Forwarded-Server": "testserver.wfatestorg.org",
    "Content-Length": "727",
    "Connection": "Keep-Alive"
  },
  "body": {
    "version": "1.4",
    "availableSpectrumInquiryRequests": [
      {
        "requestId": "4189564477",
        "deviceDescriptor": {
          "serialNumber": "E8YG05QKH41H",
          "rulesetIds": [
            "US_47_CFR_PART_15_SUBPART_E"
          ],
        },
        "certificationId": [
          {
            "nra": [

```

```
        "FCC"
      ],
      "id": [
        "Z8H89FT0068"
      ],
      "rulesetId": "US_47_CFR_PART_15_SUBPART_E"
    }
  ]
},
"location": {
  "ellipse": {
    "center": {
      "longitude": -78.589127,
      "latitude": 43.099808
    },
    "majorAxis": 11,
    "minorAxis": 11,
    "orientation": 0
  },
  "elevation": {
    "height": 197,
    "heightType": "AMSL",
    "verticalUncertainty": 9
  },
  "indoorDeployment": 2
},
"inquiredFrequencyRange": [
  {
    "lowFrequency": 5925,
    "highFrequency": 6425
  },
  {
    "lowFrequency": 6525,
    "highFrequency": 6875
  }
],
"minDesiredPower": 10
```



```
    }
  ]
}

##### 2023-09-26T09:30:15Z #####
{
  "availableSpectrumInquiryResponses": [
    {
      "response": {
        "responseCode": 0,
        "shortDescription": "SUCCESS"
      },
      "availableFrequencyInfo": [],
      "requestId": "4189564477",
      "availabilityExpireTime": "2023-09-27T09:30:15Z",
      "rulesetId": "US_47_CFR_PART_15_SUBPART_E"
    }
  ],
  "version": "1.4"
}
```





CT\_AFC\_SP\_AP\_AFCDSAU33\_Frequency\_10616\_1

##### 2023-09-26T09:31:10Z #####

```
{
  "headers": {
    "Host": "testserver.wfatestorg.org",
    "Accept": "*/*",
    "Content-Type": "application/json",
    "X-Forwarded-For": "192.168.0.1",
    "X-Forwarded-Host": "testserver.wfatestorg.org",
    "X-Forwarded-Server": "testserver.wfatestorg.org",
    "Content-Length": "727",
    "Connection": "Keep-Alive"
  },
  "body": {
    "version": "1.4",
    "availableSpectrumInquiryRequests": [
      {
        "requestId": "2638438286",
        "deviceDescriptor": {
          "serialNumber": "E8YG05QKH41H",
          "rulesetIds": [
            "US_47_CFR_PART_15_SUBPART_E"
          ],
          "certificationId": [
            {
              "nra": [
                "FCC"
              ],
              "id": [
                "Z8H89FT0068"
              ],
              "rulesetId": "US_47_CFR_PART_15_SUBPART_E"
            }
          ]
        },
        "location": {
          "ellipse": {
```



```
        "center": {
            "longitude": -78.589127,
            "latitude": 43.099808
        },
        "majorAxis": 10,
        "minorAxis": 10,
        "orientation": 0
    },
    "elevation": {
        "height": 197,
        "heightType": "AMSL",
        "verticalUncertainty": 9
    },
    "indoorDeployment": 2
},
"inquiredFrequencyRange": [
    {
        "lowFrequency": 5925,
        "highFrequency": 6425
    },
    {
        "lowFrequency": 6525,
        "highFrequency": 6875
    }
],
"minDesiredPower": 10
}
]
}
```

```
##### 2023-09-26T09:31:10Z #####
{
    "availableSpectrumInquiryResponses": [
        {
            "response": {
                "responseCode": 0,
```

```
"shortDescription": "SUCCESS"
},
"availableFrequencyInfo": [
  {
    "frequencyRange": {
      "highFrequency": 5965,
      "lowFrequency": 5945
    },
    "maxPsd": 21.716139347501574
  },
  {
    "frequencyRange": {
      "highFrequency": 5985,
      "lowFrequency": 5965
    },
    "maxPsd": 11.6622097599012
  },
  {
    "frequencyRange": {
      "highFrequency": 6005,
      "lowFrequency": 5985
    },
    "maxPsd": 12.677355411465602
  },
  {
    "frequencyRange": {
      "highFrequency": 6025,
      "lowFrequency": 6005
    },
    "maxPsd": 20.8168076596021
  },
  {
    "frequencyRange": {
      "highFrequency": 6045,
      "lowFrequency": 6025
    },
    "maxPsd": 16.26489159125473
  }
]
```



```
    },
    {
      "frequencyRange": {
        "highFrequency": 6065,
        "lowFrequency": 6045
      },
      "maxPsd": 16.827545410070584
    },
    {
      "frequencyRange": {
        "highFrequency": 6085,
        "lowFrequency": 6065
      },
      "maxPsd": 16.834468201984585
    },
    {
      "frequencyRange": {
        "highFrequency": 6105,
        "lowFrequency": 6085
      },
      "maxPsd": 18.986043537265775
    }
  ],
  "requestId": "2638438286",
  "availabilityExpireTime": "2023-09-27T09:31:10Z",
  "rulesetId": "US_47_CFR_PART_15_SUBPART_E"
}
],
"version": "1.4"
}
```

```
##### 2023-09-26T09:31:29Z #####
{
  "headers": {
    "Host": "testserver.wfatestorg.org",
    "Accept": "*/*",
    "Content-Type": "application/json",
```

```
"X-Forwarded-For": "192.168.0.1",
"X-Forwarded-Host": "testserver.wfatestorg.org",
"X-Forwarded-Server": "testserver.wfatestorg.org",
"Content-Length": "726",
"Connection": "Keep-Alive"
},
"body": {
  "version": "1.4",
  "availableSpectrumInquiryRequests": [
    {
      "requestId": "815705998",
      "deviceDescriptor": {
        "serialNumber": "E8YG05QKH41H",
        "rulesetIds": [
          "US_47_CFR_PART_15_SUBPART_E"
        ],
        "certificationId": [
          {
            "nra": [
              "FCC"
            ],
            "id": [
              "Z8H89FT0068"
            ],
            "rulesetId": "US_47_CFR_PART_15_SUBPART_E"
          }
        ]
      }
    ]
  },
  "location": {
    "ellipse": {
      "center": {
        "longitude": -78.589127,
        "latitude": 43.099808
      },
      "majorAxis": 10,
      "minorAxis": 10,
      "orientation": 0
    }
  }
}
```



```
    },
    "elevation": {
      "height": 197,
      "heightType": "AMSL",
      "verticalUncertainty": 9
    },
    "indoorDeployment": 2
  },
  "inquiredFrequencyRange": [
    {
      "lowFrequency": 5925,
      "highFrequency": 6425
    },
    {
      "lowFrequency": 6525,
      "highFrequency": 6875
    }
  ],
  "minDesiredPower": 10
}
]
}
```

##### 2023-09-26T09:31:29Z #####

```
{
  "availableSpectrumInquiryResponses": [
    {
      "response": {
        "responseCode": 0,
        "shortDescription": "SUCCESS"
      },
      "availableFrequencyInfo": [
        {
          "frequencyRange": {
            "highFrequency": 5965,
            "lowFrequency": 5945
          }
        }
      ]
    }
  ]
}
```

```
    },
    "maxPsd": 21.716139347501574
  },
  {
    "frequencyRange": {
      "highFrequency": 5985,
      "lowFrequency": 5965
    },
    "maxPsd": 11.6622097599012
  },
  {
    "frequencyRange": {
      "highFrequency": 6005,
      "lowFrequency": 5985
    },
    "maxPsd": 12.677355411465602
  },
  {
    "frequencyRange": {
      "highFrequency": 6025,
      "lowFrequency": 6005
    },
    "maxPsd": 20.8168076596021
  },
  {
    "frequencyRange": {
      "highFrequency": 6045,
      "lowFrequency": 6025
    },
    "maxPsd": 16.26489159125473
  },
  {
    "frequencyRange": {
      "highFrequency": 6065,
      "lowFrequency": 6045
    },
    "maxPsd": 16.827545410070584
  }
```

```
    },
    {
      "frequencyRange": {
        "highFrequency": 6085,
        "lowFrequency": 6065
      },
      "maxPsd": 16.834468201984585
    },
    {
      "frequencyRange": {
        "highFrequency": 6105,
        "lowFrequency": 6085
      },
      "maxPsd": 18.986043537265775
    }
  ],
  "requestId": "815705998",
  "availabilityExpireTime": "2023-09-27T09:31:29Z",
  "rulesetId": "US_47_CFR_PART_15_SUBPART_E"
}
],
"version": "1.4"
}
```





CT\_AFC\_SP\_AP\_AFCDUUAU34\_Frequency\_10617\_1

##### 2023-09-26T09:37:41Z #####

```
{
  "headers": {
    "Host": "testserver.wfatestorg.org",
    "Accept": "*/*",
    "Content-Type": "application/json",
    "X-Forwarded-For": "192.168.0.1",
    "X-Forwarded-Host": "testserver.wfatestorg.org",
    "X-Forwarded-Server": "testserver.wfatestorg.org",
    "Content-Length": "727",
    "Connection": "Keep-Alive"
  },
  "body": {
    "version": "1.4",
    "availableSpectrumInquiryRequests": [
      {
        "requestId": "2007049133",
        "deviceDescriptor": {
          "serialNumber": "E8YG05QKH41H",
          "rulesetIds": [
            "US_47_CFR_PART_15_SUBPART_E"
          ],
          "certificationId": [
            {
              "nra": [
                "FCC"
              ],
              "id": [
                "Z8H89FT0068"
              ],
              "rulesetId": "US_47_CFR_PART_15_SUBPART_E"
            }
          ]
        },
        "location": {
          "ellipse": {
```



```
        "center": {
            "longitude": -78.589088,
            "latitude": 43.099804
        },
        "majorAxis": 10,
        "minorAxis": 10,
        "orientation": 0
    },
    "elevation": {
        "height": 197,
        "heightType": "AMSL",
        "verticalUncertainty": 9
    },
    "indoorDeployment": 2
},
"inquiredFrequencyRange": [
    {
        "lowFrequency": 5925,
        "highFrequency": 6425
    },
    {
        "lowFrequency": 6525,
        "highFrequency": 6875
    }
],
"minDesiredPower": 10
}
]
}
```

```
##### 2023-09-26T09:37:41Z #####
{
    "availableSpectrumInquiryResponses": [
        {
            "response": {
                "responseCode": 0,
```

```
"shortDescription": "SUCCESS"
},
"availableFrequencyInfo": [
  {
    "frequencyRange": {
      "highFrequency": 5945,
      "lowFrequency": 5925
    },
    "maxPsd": 23
  },
  {
    "frequencyRange": {
      "highFrequency": 5965,
      "lowFrequency": 5945
    },
    "maxPsd": 23
  },
  {
    "frequencyRange": {
      "highFrequency": 5985,
      "lowFrequency": 5965
    },
    "maxPsd": 23
  },
  {
    "frequencyRange": {
      "highFrequency": 6005,
      "lowFrequency": 5985
    },
    "maxPsd": 23
  },
  {
    "frequencyRange": {
      "highFrequency": 6025,
      "lowFrequency": 6005
    },
    "maxPsd": 23
  }
]
```

```
},
{
  "frequencyRange": {
    "highFrequency": 6045,
    "lowFrequency": 6025
  },
  "maxPsd": 23
},
{
  "frequencyRange": {
    "highFrequency": 6065,
    "lowFrequency": 6045
  },
  "maxPsd": 23
},
{
  "frequencyRange": {
    "highFrequency": 6085,
    "lowFrequency": 6065
  },
  "maxPsd": 23
},
{
  "frequencyRange": {
    "highFrequency": 6105,
    "lowFrequency": 6085
  },
  "maxPsd": 23
},
{
  "frequencyRange": {
    "highFrequency": 6125,
    "lowFrequency": 6105
  },
  "maxPsd": 23
},
{
```

```
"frequencyRange": {
  "highFrequency": 6145,
  "lowFrequency": 6125
},
"maxPsd": 23
},
{
  "frequencyRange": {
    "highFrequency": 6165,
    "lowFrequency": 6145
  },
  "maxPsd": 23
},
{
  "frequencyRange": {
    "highFrequency": 6185,
    "lowFrequency": 6165
  },
  "maxPsd": 23
},
{
  "frequencyRange": {
    "highFrequency": 6205,
    "lowFrequency": 6185
  },
  "maxPsd": 23
},
{
  "frequencyRange": {
    "highFrequency": 6245,
    "lowFrequency": 6225
  },
  "maxPsd": 23
},
{
  "frequencyRange": {
    "highFrequency": 6265,
```

```
        "lowFrequency": 6245
      },
      "maxPsd": 23
    },
    {
      "frequencyRange": {
        "highFrequency": 6285,
        "lowFrequency": 6265
      },
      "maxPsd": 23
    },
    {
      "frequencyRange": {
        "highFrequency": 6305,
        "lowFrequency": 6285
      },
      "maxPsd": 23
    },
    {
      "frequencyRange": {
        "highFrequency": 6325,
        "lowFrequency": 6305
      },
      "maxPsd": 23
    },
    {
      "frequencyRange": {
        "highFrequency": 6345,
        "lowFrequency": 6325
      },
      "maxPsd": 23
    },
    {
      "frequencyRange": {
        "highFrequency": 6365,
        "lowFrequency": 6345
      },
    },
```

```
"maxPsd": 23
},
{
  "frequencyRange": {
    "highFrequency": 6385,
    "lowFrequency": 6365
  },
  "maxPsd": 23
},
{
  "frequencyRange": {
    "highFrequency": 6405,
    "lowFrequency": 6385
  },
  "maxPsd": 23
},
{
  "frequencyRange": {
    "highFrequency": 6425,
    "lowFrequency": 6405
  },
  "maxPsd": 23
},
{
  "frequencyRange": {
    "highFrequency": 6545,
    "lowFrequency": 6525
  },
  "maxPsd": 23
},
{
  "frequencyRange": {
    "highFrequency": 6565,
    "lowFrequency": 6545
  },
  "maxPsd": 23
},
},
```

```
{
  "frequencyRange": {
    "highFrequency": 6585,
    "lowFrequency": 6565
  },
  "maxPsd": 23
},
{
  "frequencyRange": {
    "highFrequency": 6605,
    "lowFrequency": 6585
  },
  "maxPsd": 23
},
{
  "frequencyRange": {
    "highFrequency": 6625,
    "lowFrequency": 6605
  },
  "maxPsd": 23
},
{
  "frequencyRange": {
    "highFrequency": 6645,
    "lowFrequency": 6625
  },
  "maxPsd": 23
},
{
  "frequencyRange": {
    "highFrequency": 6665,
    "lowFrequency": 6645
  },
  "maxPsd": 23
},
{
  "frequencyRange": {
```



```
        "highFrequency": 6685,
        "lowFrequency": 6665
    },
    "maxPsd": 23
},
{
    "frequencyRange": {
        "highFrequency": 6705,
        "lowFrequency": 6685
    },
    "maxPsd": 23
},
{
    "frequencyRange": {
        "highFrequency": 6725,
        "lowFrequency": 6705
    },
    "maxPsd": 23
},
{
    "frequencyRange": {
        "highFrequency": 6745,
        "lowFrequency": 6725
    },
    "maxPsd": 23
},
{
    "frequencyRange": {
        "highFrequency": 6765,
        "lowFrequency": 6745
    },
    "maxPsd": 23
},
{
    "frequencyRange": {
        "highFrequency": 6785,
        "lowFrequency": 6765
```

```
    },
    "maxPsd": 23
  },
  {
    "frequencyRange": {
      "highFrequency": 6805,
      "lowFrequency": 6785
    },
    "maxPsd": 23
  },
  {
    "frequencyRange": {
      "highFrequency": 6825,
      "lowFrequency": 6805
    },
    "maxPsd": 23
  },
  {
    "frequencyRange": {
      "highFrequency": 6845,
      "lowFrequency": 6825
    },
    "maxPsd": 23
  },
  {
    "frequencyRange": {
      "highFrequency": 6865,
      "lowFrequency": 6845
    },
    "maxPsd": 23
  }
],
"requestId": "2007049133",
"availabilityExpireTime": "2023-09-27T09:37:41Z",
"rulesetId": "US_47_CFR_PART_15_SUBPART_E"
}
```



"version": "1.4"

}

**AFC capability - Inquired Frequency**
**AFCD.RSA: Successful registration and spectrum access request**

Freq. (MHz)	Mode (LPI or SP)	Bandwidth (MHz)	Antenna Gain (dBi)	Power (dBm)	EIRP (dBm)	AFC Response Limit (dBm)	Result	PSD (dBm/MHz)	EIRP PSD (dBm/MHz)	AFC Response Limit (dBm/MHz)	Result
6735	SP	20	18.73	13.71	32.44	-	N/A	1.27	20.00	20.82	Pass
6335	SP	20	18	15.78	33.78	-	N/A	3.24	21.24	21.62	Pass
6685	SP	40	18.73	11.32	30.05	-	N/A	-3.99	14.74	15.91	Pass
6165	SP	40	18	10.69	28.69	-	N/A	-5.14	12.86	14.38	Pass
6705	SP	80	18.73	11.28	30.01	-	N/A	-7.72	11.01	11.96	Pass
6385	SP	80	18	14.79	32.79	-	N/A	-3.74	14.26	14.89	Pass
6345	SP	160	18	11.01	29.01	-	N/A	-10.09	7.91	9.47	Pass
6665	SP	160	18.73	9.86	28.59	-	N/A	-11.77	6.96	8.28	Pass

**AFCD.SAU: Successful spectrum access update**

Freq. (MHz)	Mode (LPI or SP)	Bandwidth (MHz)	Antenna Gain (dBi)	Power (dBm)	EIRP (dBm)	AFC Response Limit (dBm)	Result	PSD (dBm/MHz)	EIRP PSD (dBm/MHz)	AFC Response Limit (dBm/MHz)	Result
5955	SP	20	18	14.8	32.80	-	N/A	2.62	20.62	21.71	Pass

**AFCD.UAU: Unsuccessful spectrum access update**

Freq. (MHz)	Mode (LPI or SP)	Bandwidth (MHz)	Antenna Gain (dBi)	Power (dBm)	EIRP (dBm)	AFC Response Limit (dBm)	Result	PSD (dBm/MHz)	EIRP PSD (dBm/MHz)	AFC Response Limit (dBm/MHz)	Result
5955	SP	20	18	16.57	34.57	-	N/A	4	22.00	23	Pass

AFC capability - Inquired Frequency

CT\_AFC\_SP\_AP\_AFCDRSA31\_Frequency\_20MHz\_10611\_1

Frequency (MHz): 6735


6.525-6.875GHz

AV Power

6735MHz\_TX

26/09/2023

CF (Hz)  
6.735G  
Span (Hz)  
30M  
RBW (Hz)  
1M  
VBW (Hz)  
3M  
Sweep Time (s)  
1.067m  
Detector Type  
RMS  
CP BW (Hz)  
20M

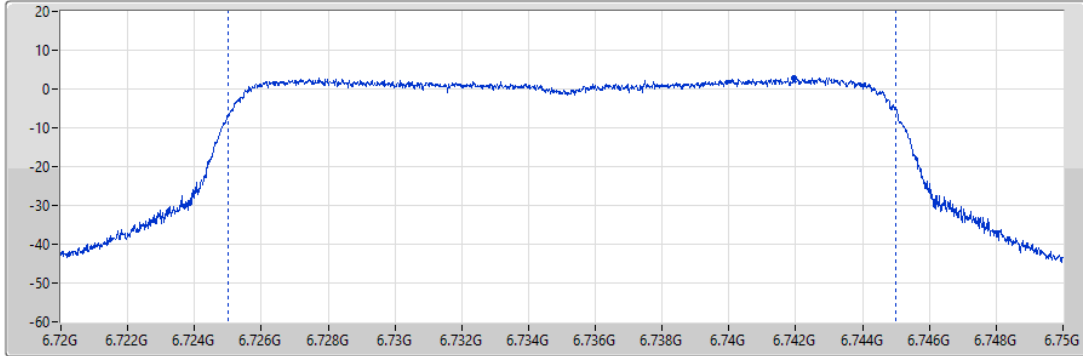

Port 1

Sum= Total Power  
PX=Port X

Sum(dBm)	P1(dBm)
13.71	13.71


6.525-6.875GHz

PSD

6735MHz



26/09/2023

CF (Hz)  
6.735G  
Span (Hz)  
30M  
RBW (Hz)  
1M  
VBW (Hz)  
3M  
Sweep Time (s)  
20m  
Detector Type  
RMS

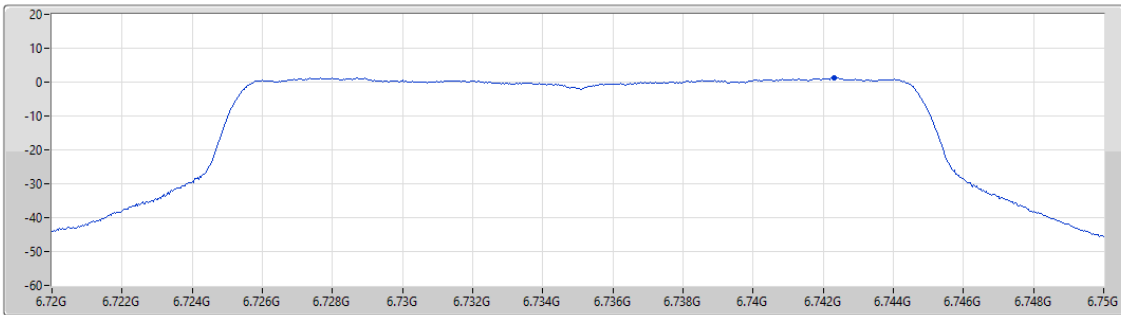

Port 1

Sum	PD	Port 1
(dBm/1M)	(dBm/1M)	(dBm/1M)
1.27	1.27	1.27

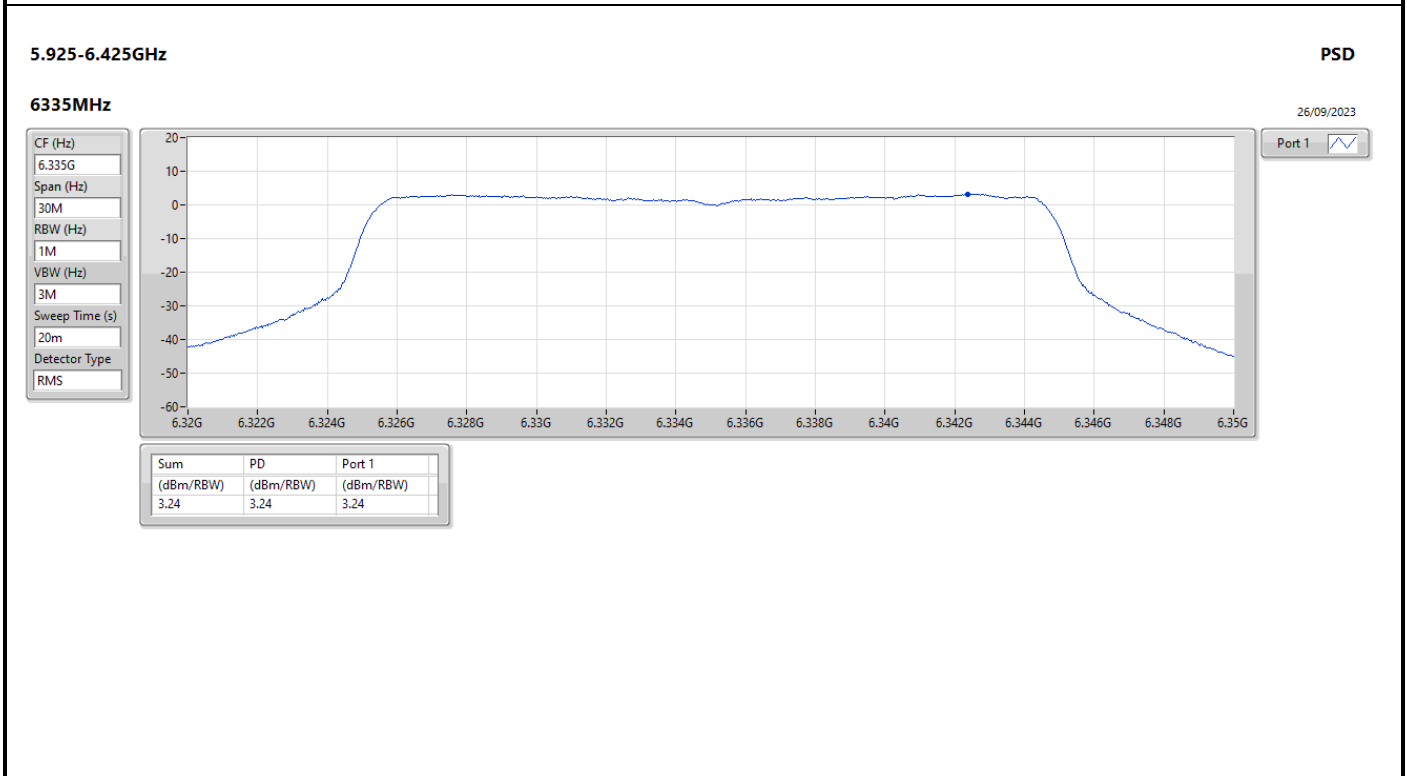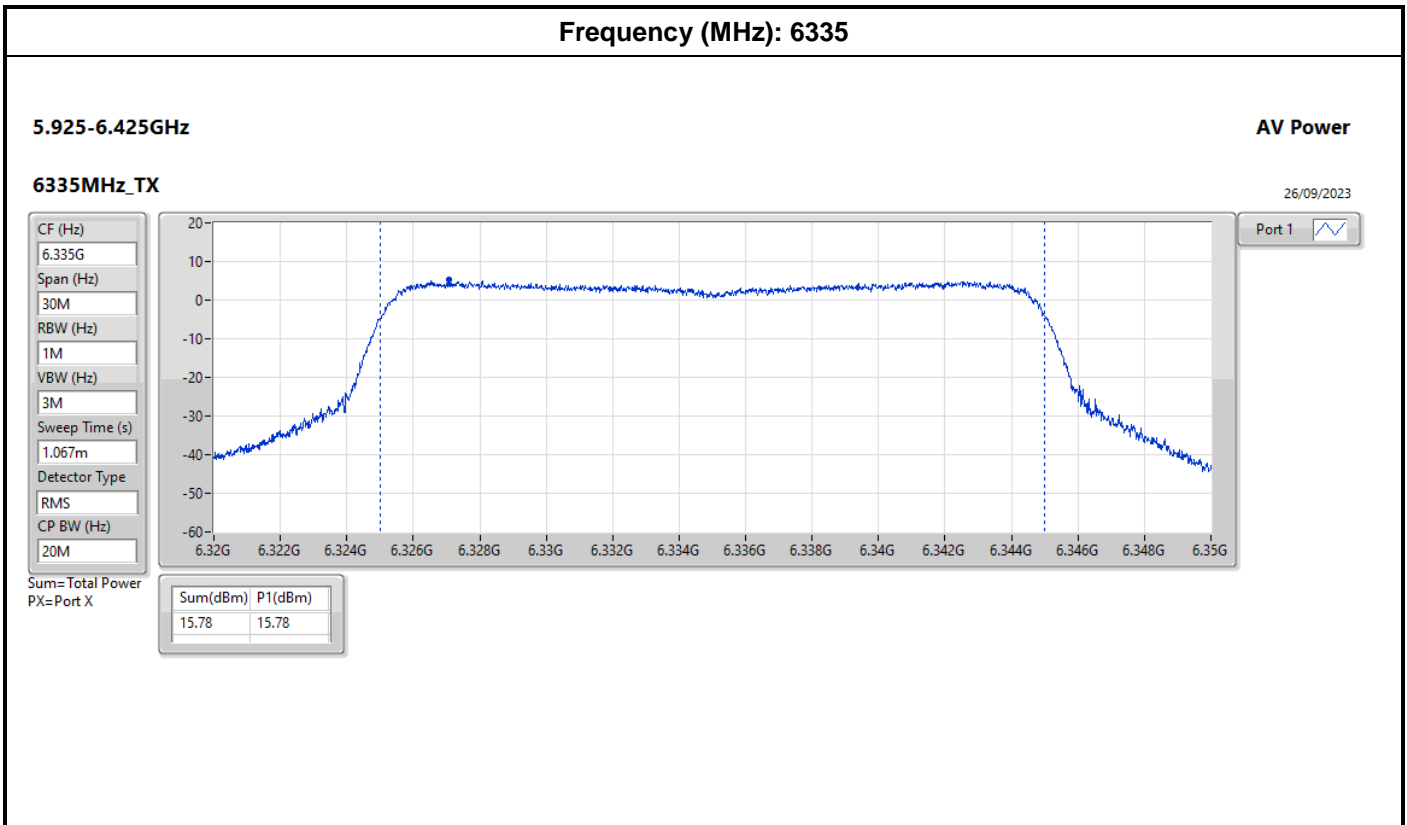

CT\_AFC\_SP\_AP\_AFCRSA31\_Frequency\_40MHz\_10612\_1

Frequency (MHz): 6685


6.525-6.875GHz

AV Power

6685MHz\_TX

26/09/2023

- CF (Hz)  
6.685G
- Span (Hz)  
60M
- RBW (Hz)  
1M
- VBW (Hz)  
3M
- Sweep Time (s)  
1.067m
- Detector Type  
RMS
- CP BW (Hz)  
40M

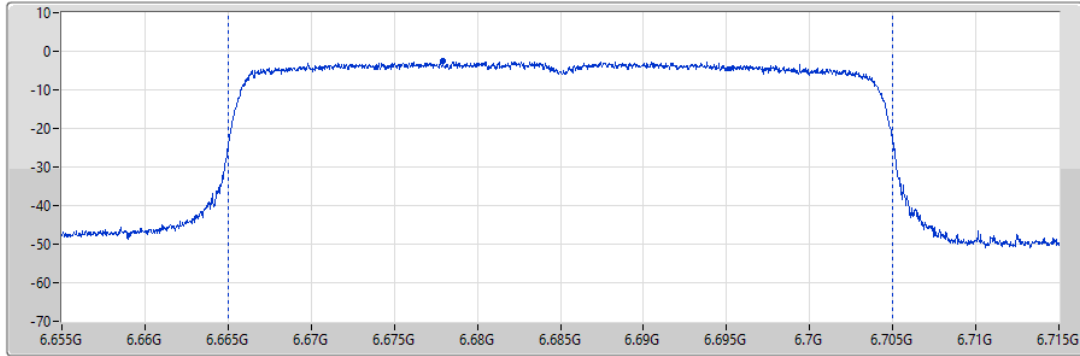

Port 1

Sum=Total Power  
PX=Port X

Sum(dBm)	P1(dBm)
11.32	11.32


6.525-6.875GHz

PSD

6685MHz



26/09/2023

- CF (Hz)  
6.685G
- Span (Hz)  
60M
- RBW (Hz)  
1M
- VBW (Hz)  
3M
- Sweep Time (s)  
20m
- Detector Type  
RMS

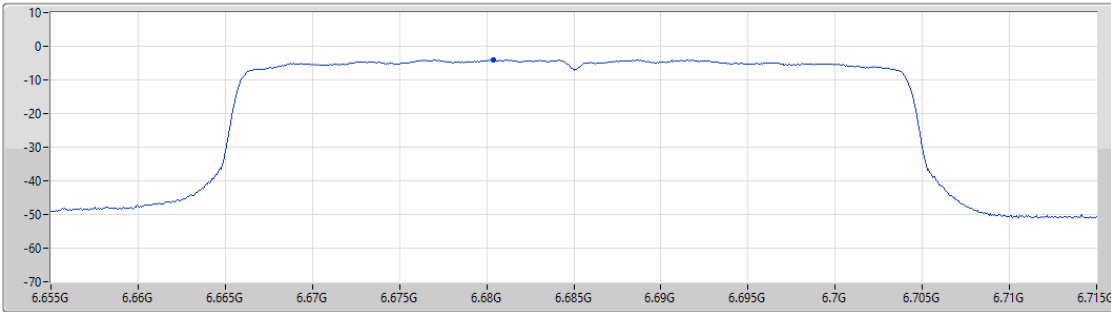

Port 1

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-3.99	-3.99	-3.99

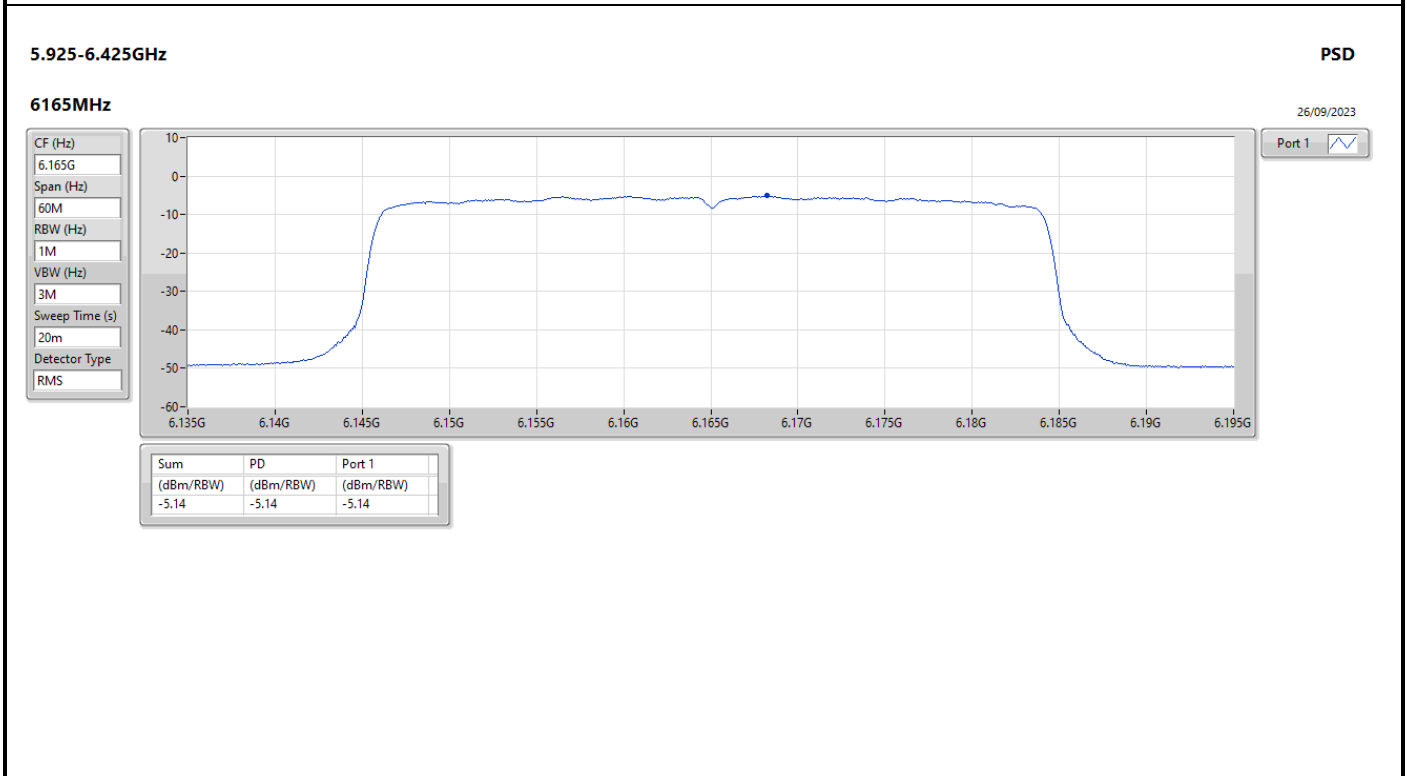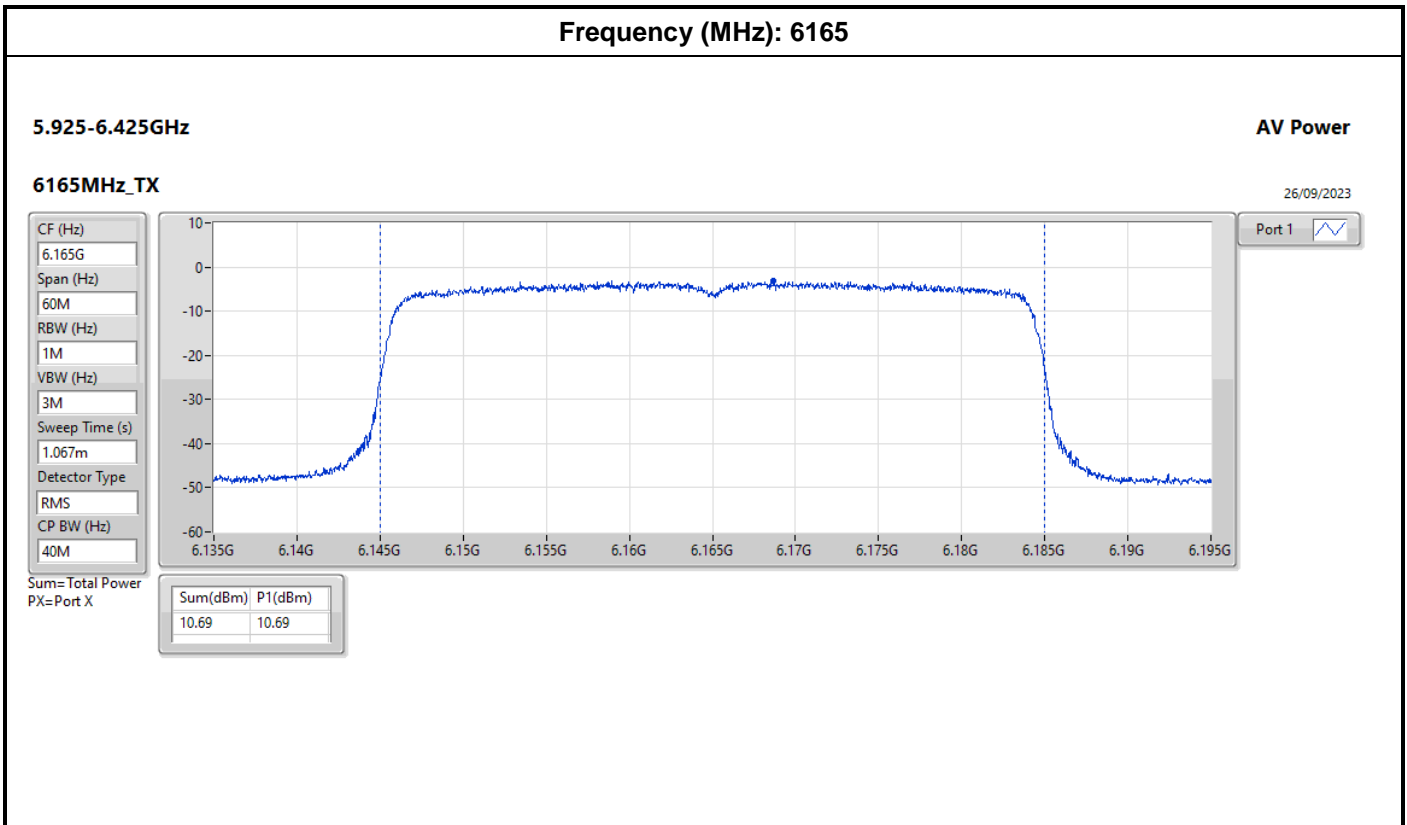



CT\_AFC\_SP\_AP\_AFCRSA31\_Frequency\_80MHz\_10613\_1

Frequency (MHz): 6705

6.525-6.875GHz

AV Power

6705MHz\_TX

26/09/2023

CF (Hz)  
6.705G

Span (Hz)  
120M


RBW (Hz)  
1M

VBW (Hz)  
3M

Sweep Time (s)  
1.067m

Detector Type  
RMS

CP BW (Hz)  
80M

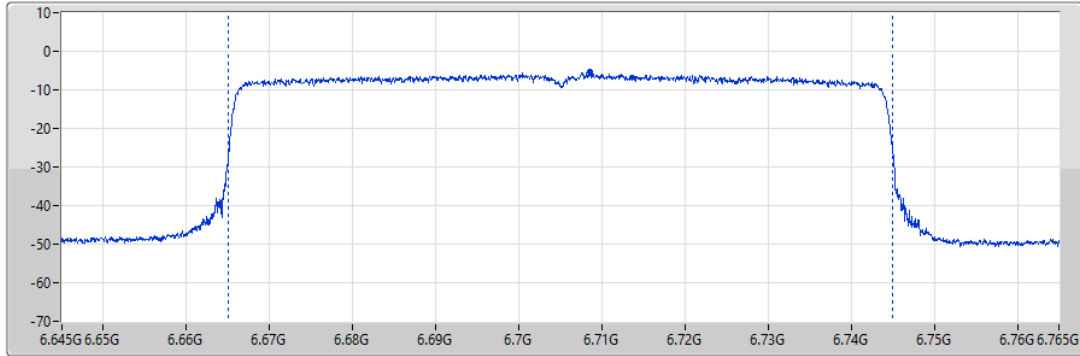

Port 1

Sum=Total Power  
PX=Port X

Sum(dBm)	P1(dBm)
11.28	11.28

6.525-6.875GHz

PSD

6705MHz

26/09/2023

CF (Hz)  
6.705G


Span (Hz)  
120M

RBW (Hz)  
1M

VBW (Hz)  
3M



Sweep Time (s)  
20m

Detector Type  
RMS

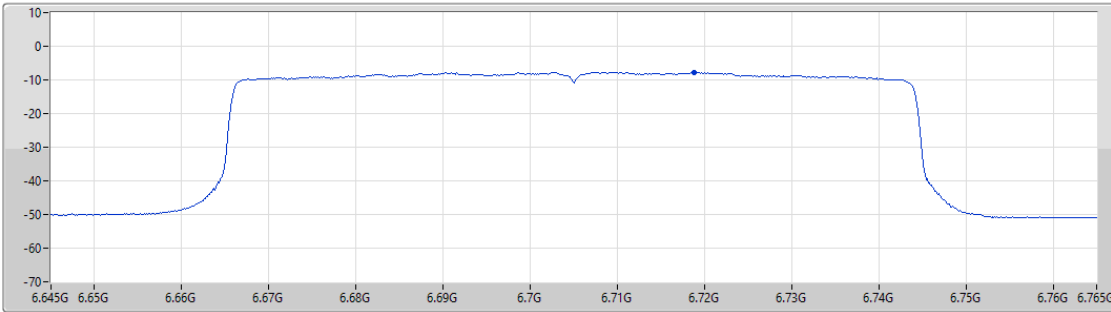

Port 1

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-7.72	-7.72	-7.72

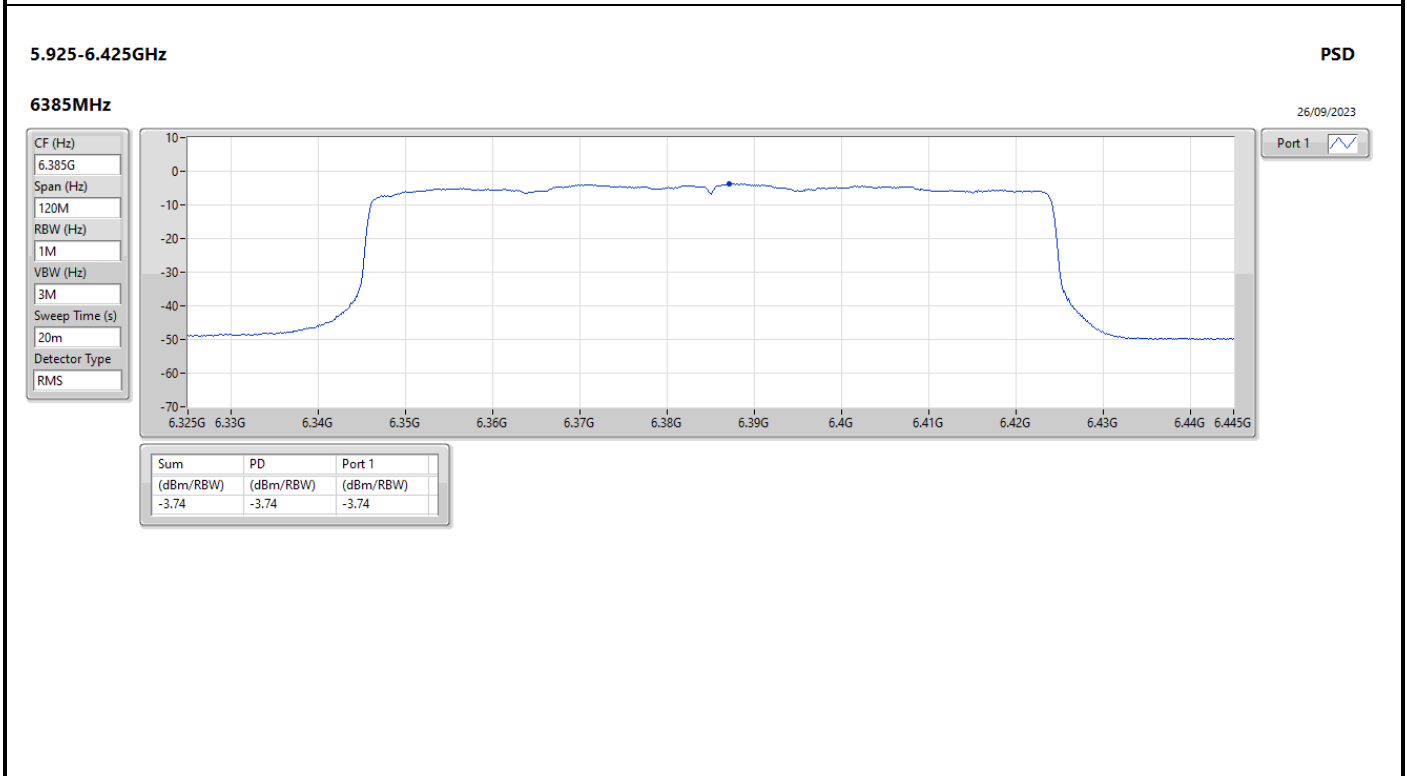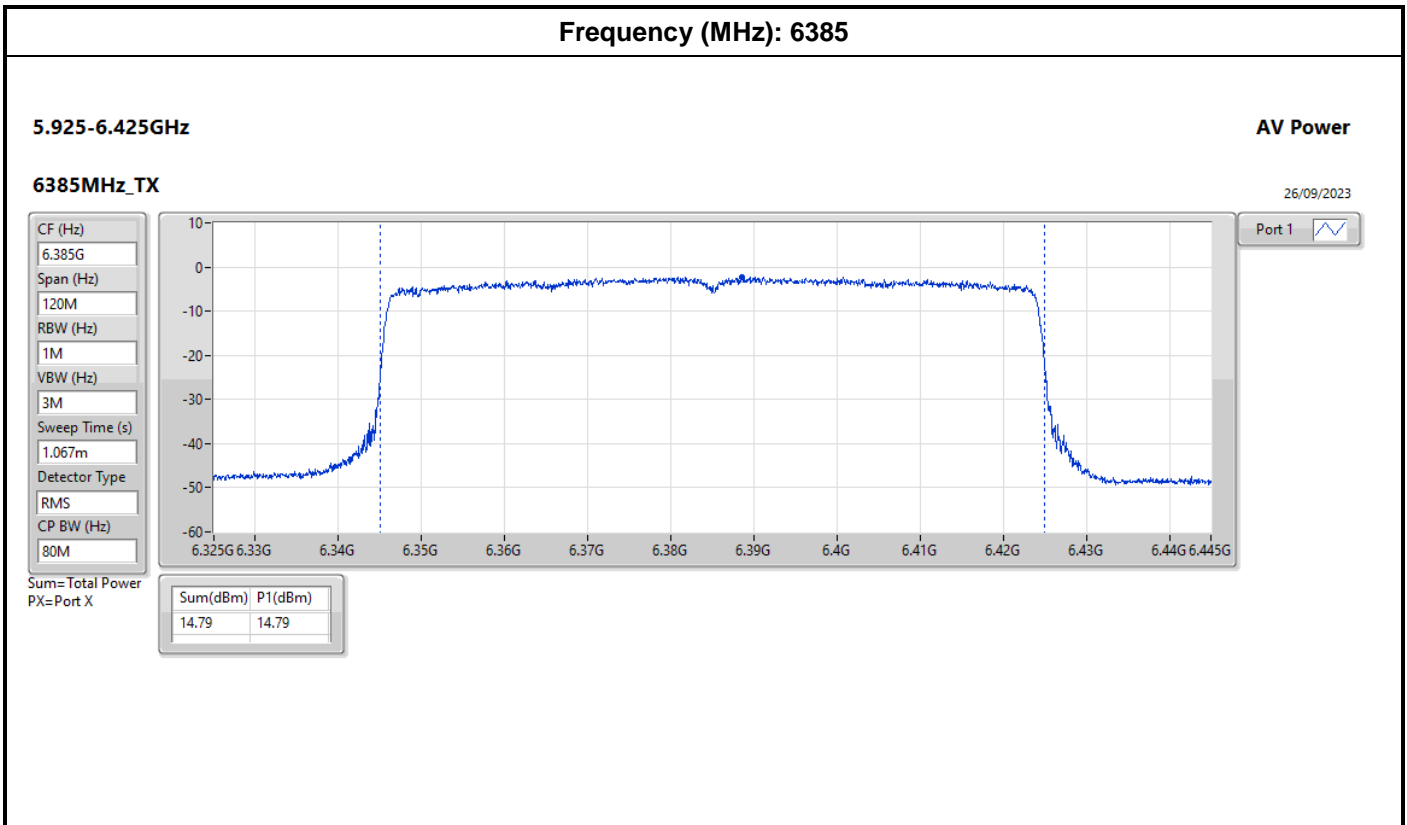

CT\_AFC\_SP\_AP\_AFCDRSA31\_Frequency\_160MHz\_10614\_1

Frequency (MHz): 6345

5.925-6.425GHz

AV Power

6345MHz\_TX

26/09/2023

CF (Hz)  
6.345G

Span (Hz)  
240M


RBW (Hz)  
1M

VBW (Hz)  
3M

Sweep Time (s)  
1.067m

Detector Type  
RMS

CP BW (Hz)  
160M

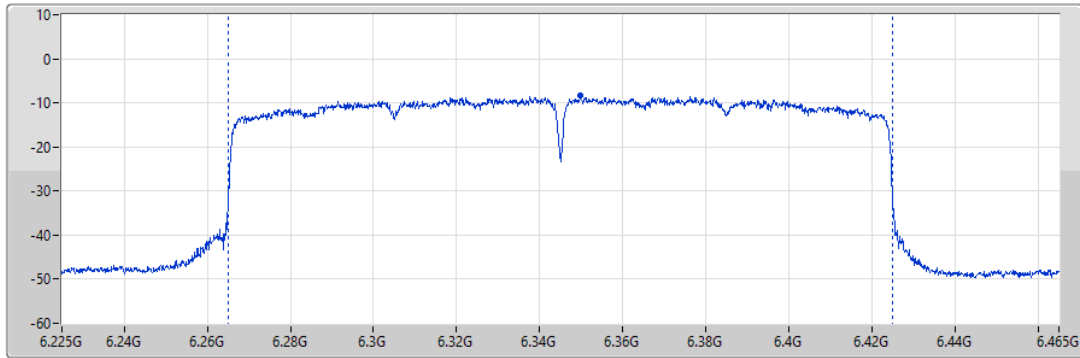

Port 1

Sum=Total Power  
PX=Port X

Sum(dBm)	P1(dBm)
11.01	11.01

5.925-6.425GHz

PSD

6345MHz

26/09/2023

CF (Hz)  
6.345G


Span (Hz)  
240M

RBW (Hz)  
1M

VBW (Hz)  
3M



Sweep Time (s)  
20m

Detector Type  
RMS

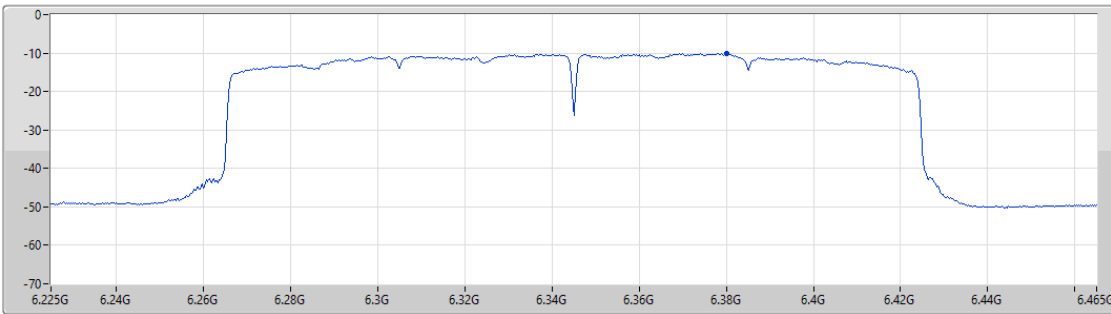

Port 1

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-10.08	-10.08	-10.09

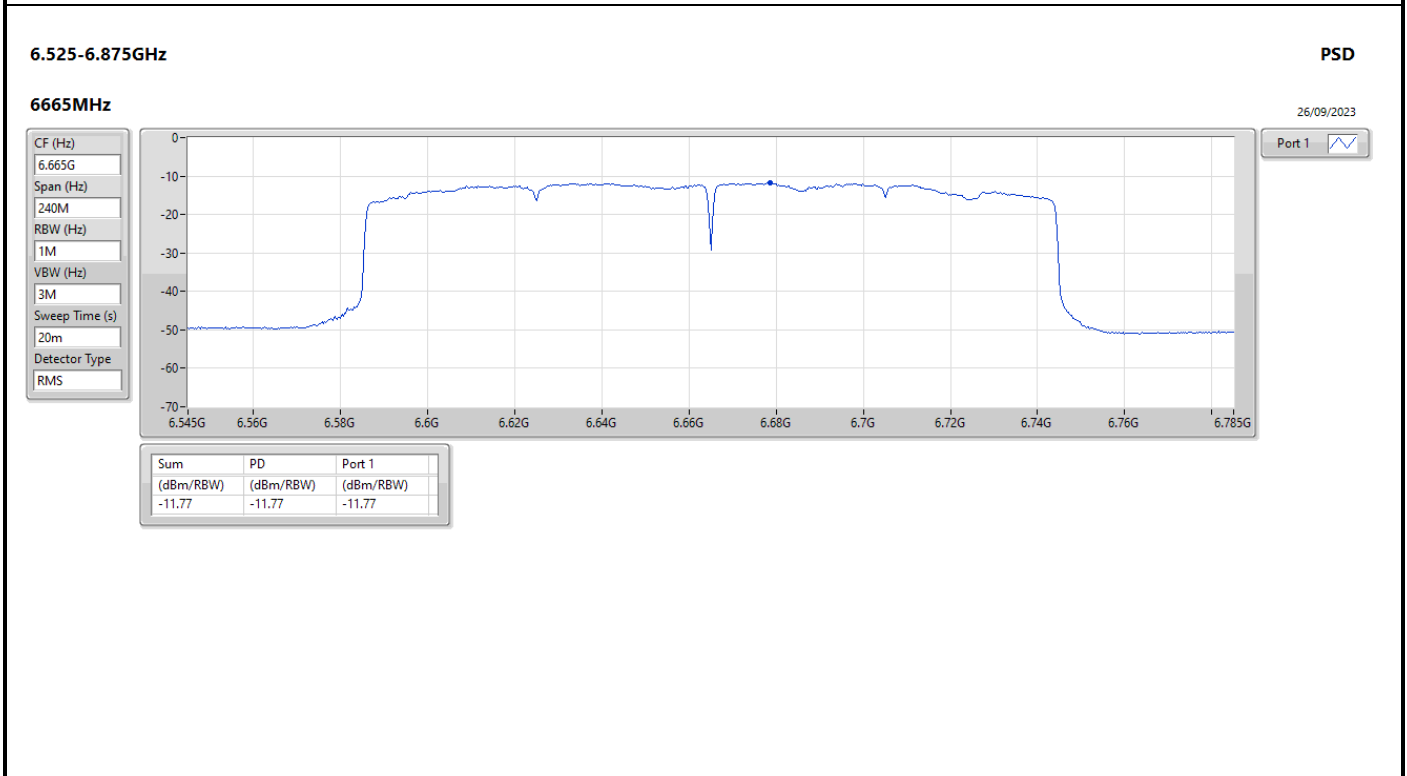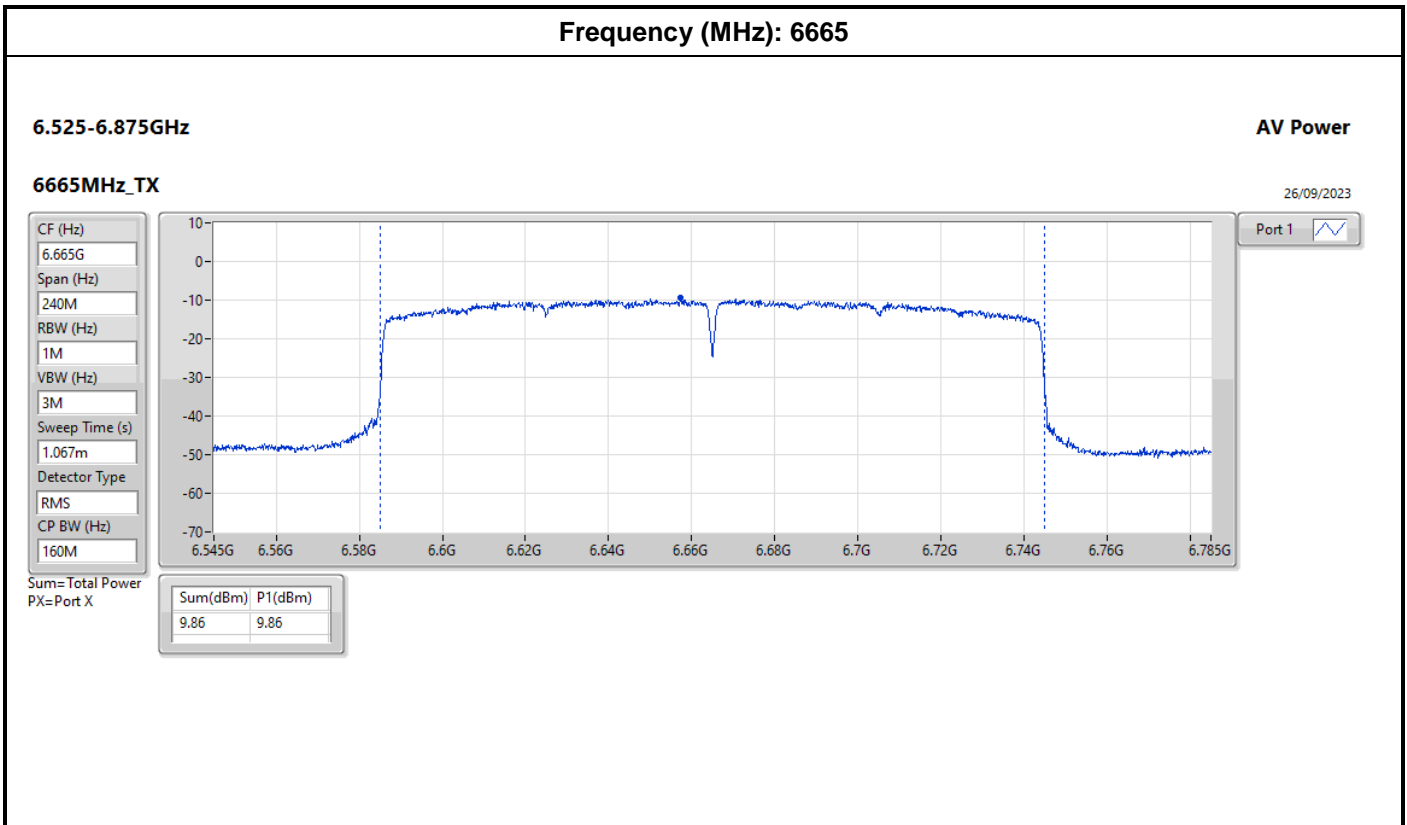

CT\_AFC\_SP\_AP\_AFCDSAU33\_Frequency\_10616\_1

Bandwidth: 20MHz

Frequency (MHz): 5955

5.925-6.425GHz

AV Power

5955MHz\_TX

26/09/2023

CF (Hz)  
5.955G

Span (Hz)  
30M


RBW (Hz)  
1M

VBW (Hz)  
3M

Sweep Time (s)  
1.067m

Detector Type  
RMS

CP BW (Hz)  
20M

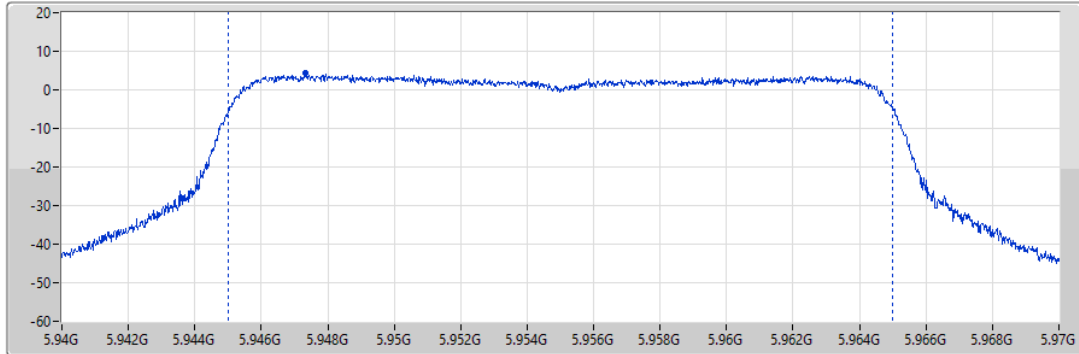

Sum= Total Power  
PX=Port X

Sum(dBm)	P1(dBm)
14.80	14.80

5.925-6.425GHz

PSD

5955MHz

26/09/2023

CF (Hz)  
5.955G


Span (Hz)  
30M

RBW (Hz)  
1M

VBW (Hz)  
3M

Sweep Time (s)  
20m

Detector Type  
RMS

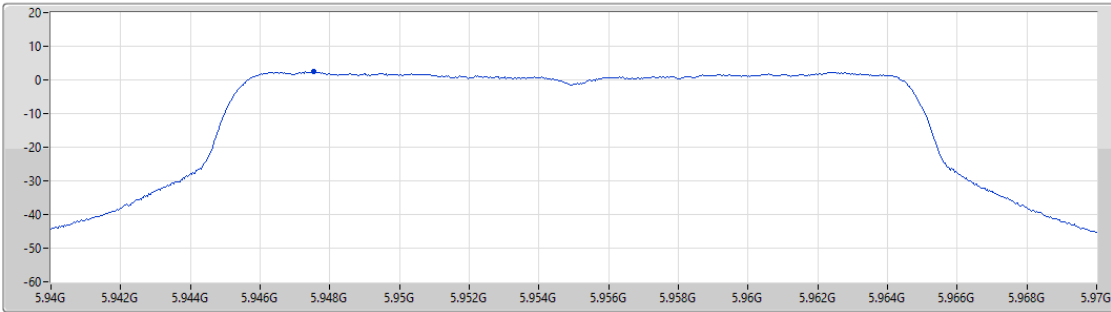

Sum (dBm/RBW)	PD (dBm/RBW)	Port 1 (dBm/RBW)
2.62	2.62	2.62

CT\_AFC\_SP\_AP\_AFCDUAU34\_Frequency\_10617\_1

Bandwidth: 20MHz

Frequency (MHz): 5955

5.925-6.425GHz

AV Power

5955MHz\_TX

26/09/2023

CF (Hz)  
5.955G

Span (Hz)  
30M


RBW (Hz)  
1M

VBW (Hz)  
3M

Sweep Time (s)  
1.067m

Detector Type  
RMS

CP BW (Hz)  
20M

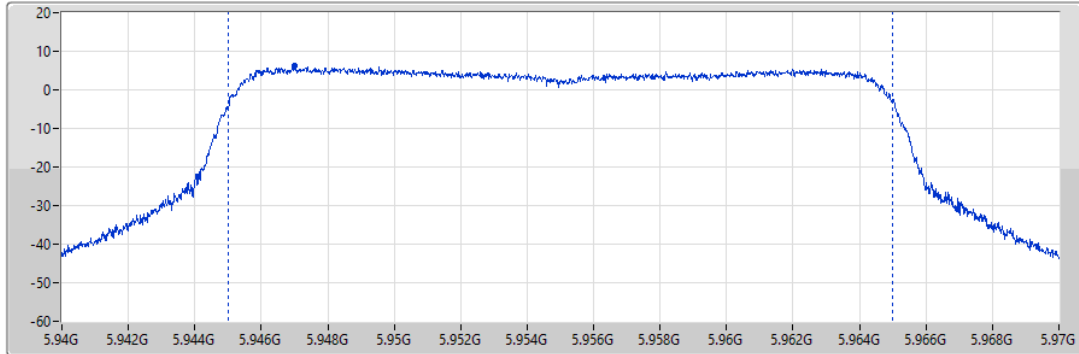

Port 1

Sum= Total Power  
PX=Port X

Sum(dBm)	P1(dBm)
16.57	16.57

5.925-6.425GHz

PSD

5955MHz

26/09/2023

CF (Hz)  
5.955G


Span (Hz)  
30M

RBW (Hz)  
1M

VBW (Hz)  
3M

Sweep Time (s)  
20m

Detector Type  
RMS

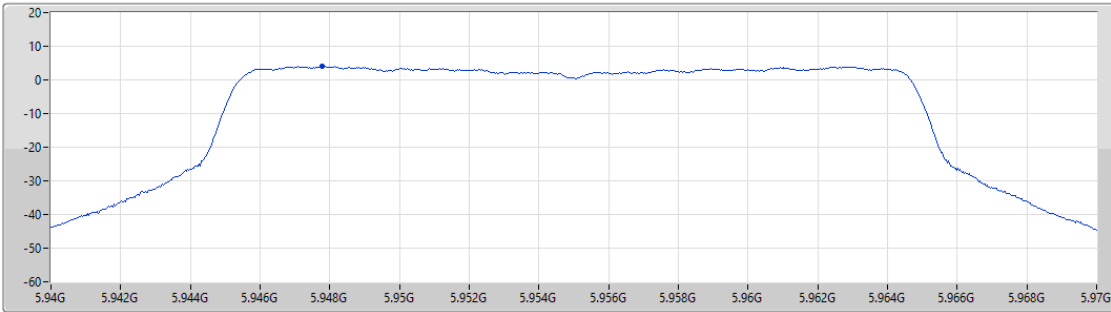


Port 1

Sum (dBm/RBW)	PD (dBm/RBW)	Port 1 (dBm/RBW)
4.00	4.00	4.00

Duty Cycle

Bandwidth: 20MHz


DC;ax20;BWch:20

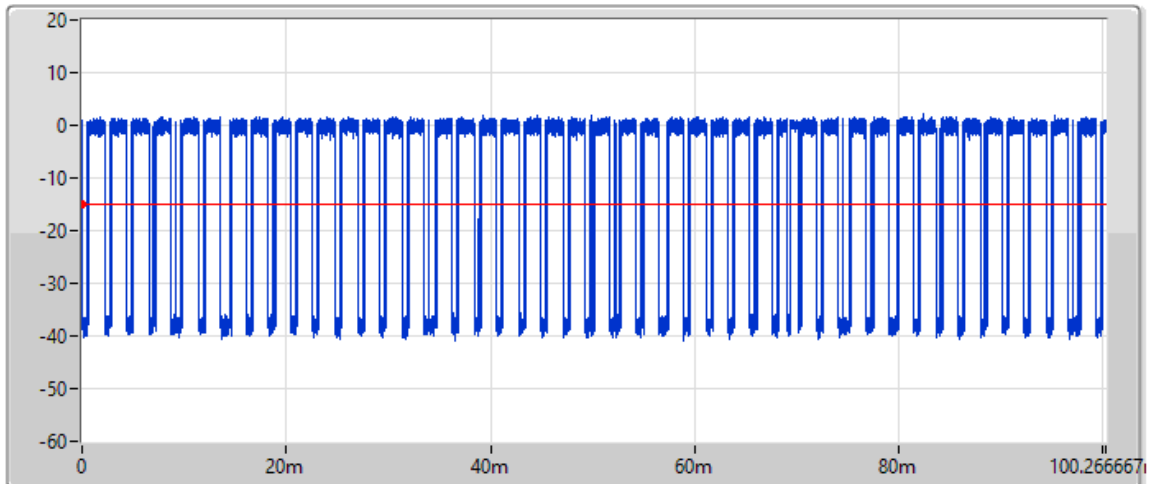

Ch Freq (Hz)	RBW (Hz)	VBW (Hz)	Sweep Time (s)	Total Sample	Sample Time (s)	TX Time (s)	DC
6.735G	8M	8M	100.267m	32001	3.133344u	74.288447m	0.741

Bandwidth: 40MHz


DC;ax40;BWch:40

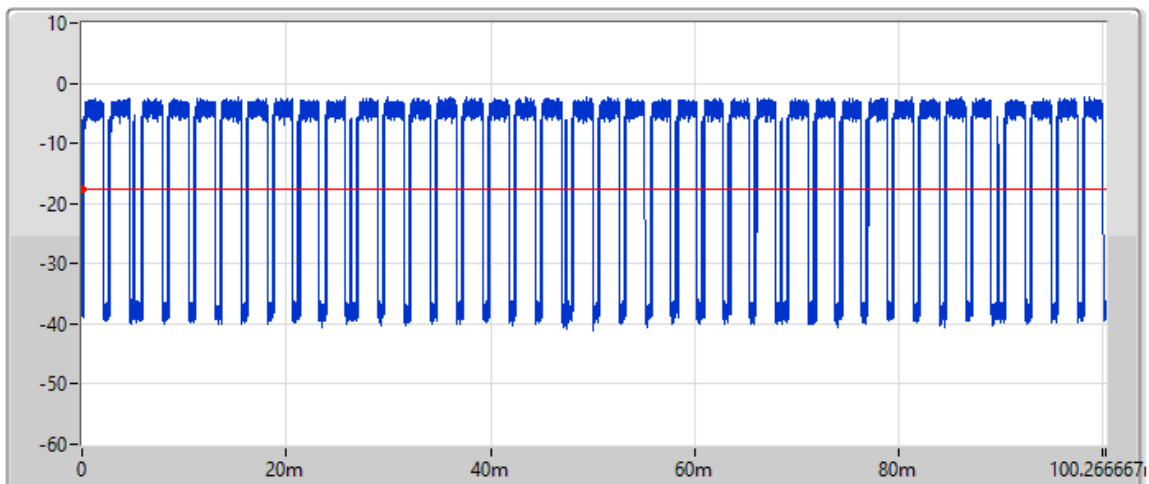

Ch Freq (Hz)	RBW (Hz)	VBW (Hz)	Sweep Time (s)	Total Sample	Sample Time (s)	TX Time (s)	DC
6.685G	8M	8M	100.267m	32001	3.133344u	77.597258m	0.774

Bandwidth: 80MHz


DC;ax80;BWch:80

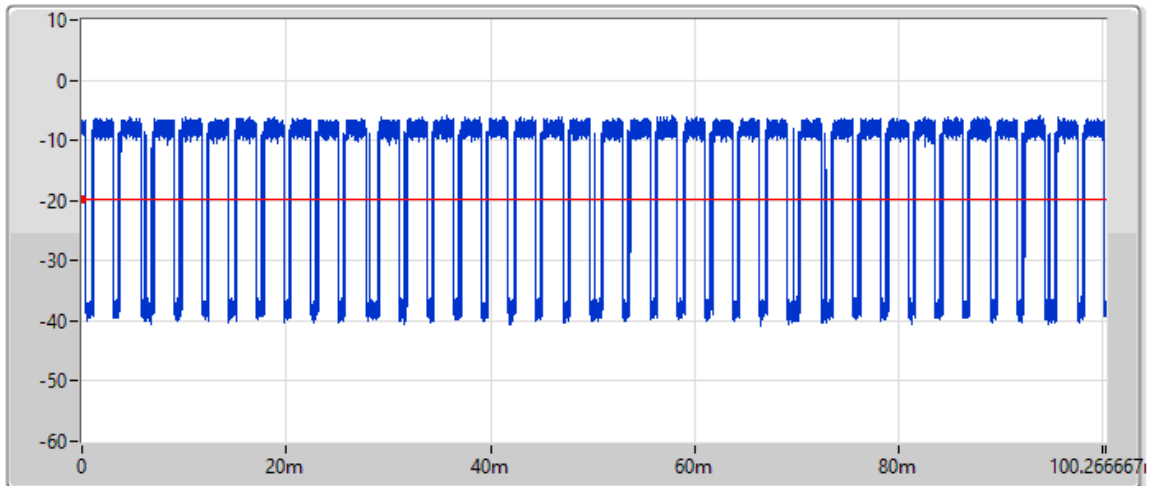

Ch Freq (Hz)	RBW (Hz)	VBW (Hz)	Sweep Time (s)	Total Sample	Sample Time (s)	TX Time (s)	DC
6.705G	8M	8M	100.267m	32001	3.133344u	77.475058m	0.773

Bandwidth: 160MHz

DC;ax160;BWch:160

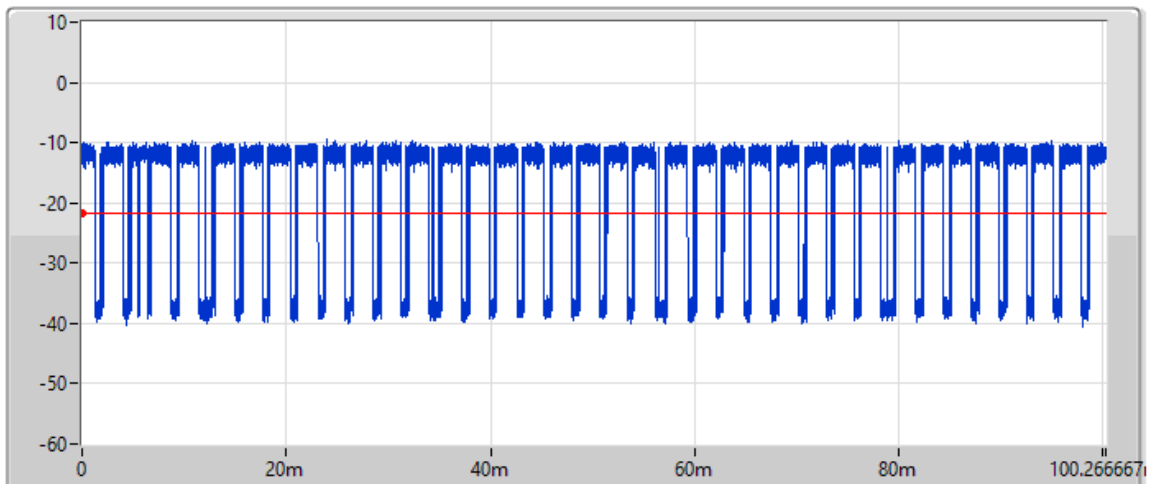

Ch Freq (Hz)	RBW (Hz)	VBW (Hz)	Sweep Time (s)	Total Sample	Sample Time (s)	TX Time (s)	DC
6.345G	8M	8M	100.267m	32001	3.133344u	77.634858m	0.774

————THE END————