

For Band edge

Spectrum Parameter	Setting
Detector	Peak/AV
Start/Stop Frequency	Lower Band Edge: 2300 to 2403 MHz Upper Band Edge: 2479 to 2500 MHz
RB / VB (emission in restricted band)	PK=1MHz / 1MHz, AV=1 MHz / 10 Hz

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~90kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	90kHz~110kHz / RB 200Hz for QP
Start ~ Stop Frequency	110kHz~490kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	490kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

### 8.2 TEST PROCEDURE


- a. The measuring distance of at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz, and above 1GHz.
- b. The EUT was placed on the top of a rotating table 0.8 meters (above 1GHz is 1.5 m) above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment shall be 0.8 m (above 1GHz is 1.5 m); the height of the test antenna shall vary between 1 m to 4 m. horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then QuasiPeak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

### 8.3 TESTSETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

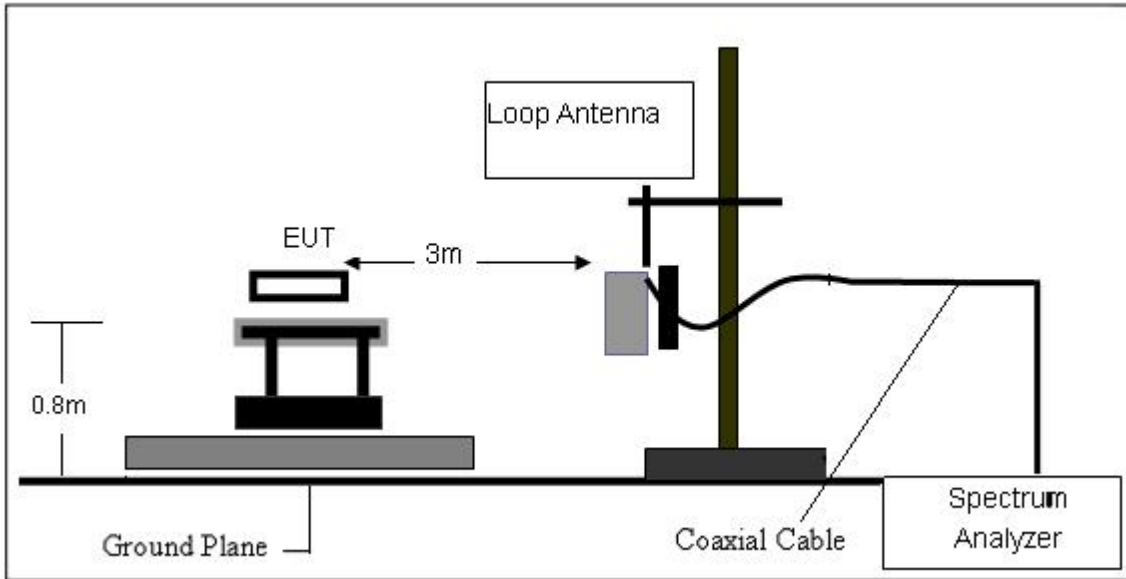

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

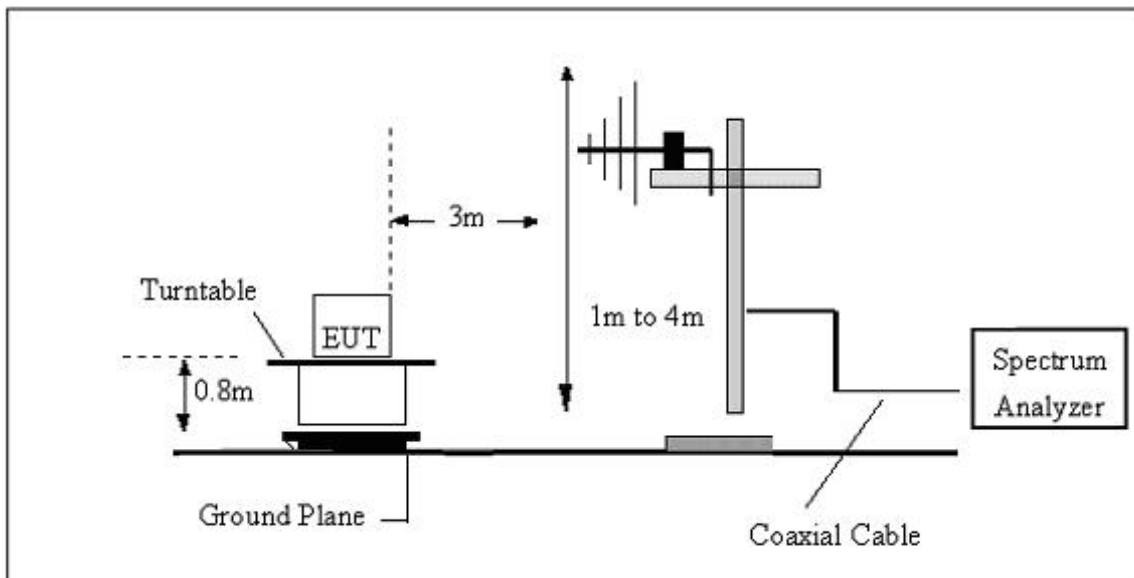

(C) Radiated Emission Test-Up Frequency Above 1GHz

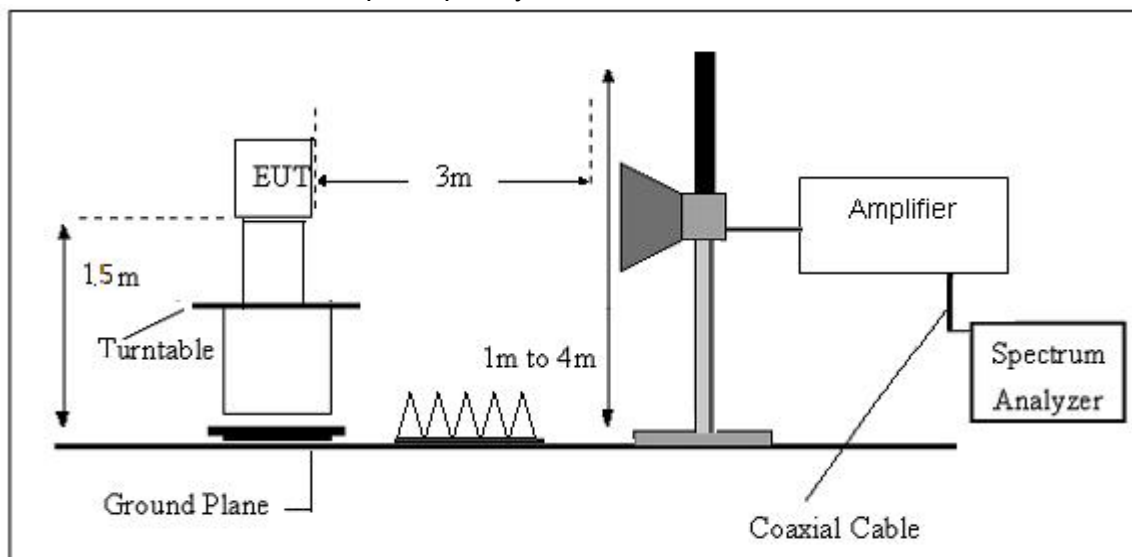

8.4. TEST RESULTS

(9KHz-30MHz)

Temperature:	22.7°C	Relative Humidity:	61%
Test Voltage:	DC 3.7V	Test Mode:	GFSK(worst mode)

Freq. (MHz)	Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	State P/F	Test Result
--	--	--	--	--	PASS
--	--	--	--	--	PASS

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log(\text{specific distance}/\text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

8.5 (30MHZ-1000MHZ)

Temperature:	24.7°C	Relative Humidity:	61%
Test Voltage:	DC 3.7V	Phase:	Horizontal
Test Mode:	GFSK(worst mode)		



No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	37.2855	47.03	- 16.66	30.37	40.00	-9.63	QP
2	75.7114	36.96	-21.43	15.53	40.00	-24.47	QP
3	117.3603	34.55	- 19. 19	15.36	43.50	-28. 14	QP
4	250.3012	49.09	- 15.27	33.82	46.00	- 12. 18	QP
5	629.4772	31.04	-7.35	23.69	46.00	-22.31	QP
6	975.7530	31.16	-2. 16	29.00	54.00	-25.00	QP

Note: 1. Margin = Result (Result =Reading + Factor )–Limit  
 2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.  
 3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

Temperature:	22.7°C	Relative Humidity:	61%
Test Voltage:	DC 3.7V	Phase:	Vertical
Test Mode:	GFSK(worst mode)		



No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	34.6385	51.81	- 16.01	35.80	40.00	-4.20	QP
2	49.1865	48.88	- 16.36	32.52	40.00	-7.48	QP
3	106.3850	49.51	- 17.22	32.29	43.50	- 11.21	QP
4	252.0627	40.23	- 15.21	25.02	46.00	-20.98	QP
5	763.3757	36.04	-4.85	31.19	46.00	- 14.81	QP
6	958.7943	35.46	-2.44	33.02	46.00	- 12.98	QP

- Note: 1. Margin = Result (Result =Reading + Factor )–Limit  
 2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.  
 3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

■ 8.6 ABOVE 1GHZ

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4804.00	41.87	31.78	8.60	32.09	50.16	74.00	-23.84	Vertical
7206.00	34.15	36.15	11.65	32.00	49.95	74.00	-24.05	Vertical
9608.00	31.73	37.95	14.14	31.62	52.20	74.00	-21.80	Vertical
12010.00	*					74.00		Vertical
14412.00	*					74.00		Vertical
4804.00	45.63	31.78	8.60	32.09	53.92	74.00	-20.08	Horizontal
7206.00	37.75	36.15	11.65	32.00	53.55	74.00	-20.45	Horizontal
9608.00	34.29	37.95	14.14	31.62	54.76	74.00	-19.24	Horizontal
12010.00	*					74.00		Horizontal
14412.00	*					74.00		Horizontal

**Average value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4804.00	28.17	31.78	8.60	32.09	36.46	54.00	-17.54	Vertical
7206.00	22.69	36.15	11.65	32.00	38.49	54.00	-15.51	Vertical
9608.00	23.43	37.95	14.14	31.62	43.90	54.00	-10.10	Vertical
12010.00	*					54.00		Vertical
14412.00	*					54.00		Vertical
4804.00	32.05	31.78	8.60	32.09	40.34	54.00	-13.66	Horizontal
7206.00	23.29	36.15	11.65	32.00	39.09	54.00	-14.91	Horizontal
9608.00	22.87	37.95	14.14	31.62	43.34	54.00	-10.66	Horizontal
12010.00	*					54.00		Horizontal
14412.00	*					54.00		Horizontal

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. “\*”, means this data is the too weak instrument of signal is unable to test.

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4882.00	37.49	31.85	8.67	32.12	45.89	74.00	-28.11	Vertical
7323.00	32.22	36.37	11.72	31.89	48.42	74.00	-25.58	Vertical
9764.00	29.57	38.35	14.25	31.62	50.55	74.00	-23.45	Vertical
12205.00	*					74.00		Vertical
14646.00	*					74.00		Vertical
4882.00	38.73	31.85	8.67	32.12	47.13	74.00	-26.87	Horizontal
7323.00	31.30	36.37	11.72	31.89	47.50	74.00	-26.50	Horizontal
9764.00	27.89	38.35	14.25	31.62	48.87	74.00	-25.13	Horizontal
12205.00	*					74.00		Horizontal
14646.00	*					74.00		Horizontal

**Average value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4882.00	26.02	31.85	8.67	32.12	34.42	54.00	-19.58	Vertical
7323.00	21.88	36.37	11.72	31.89	38.08	54.00	-15.92	Vertical
9764.00	20.57	38.35	14.25	31.62	41.55	54.00	-12.45	Vertical
12205.00	*					54.00		Vertical
14646.00	*					54.00		Vertical
4882.00	32.23	31.85	8.67	32.12	40.63	54.00	-13.37	Horizontal
7323.00	24.10	36.37	11.72	31.89	40.30	54.00	-13.70	Horizontal
9764.00	20.52	38.35	14.25	31.62	41.50	54.00	-12.50	Horizontal
12205.00	*					54.00		Horizontal
14646.00	*					54.00		Horizontal

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. “\*”, means this data is the too weak instrument of signal is unable to test.



**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	37.92	31.93	8.73	32.16	46.42	74.00	-27.58	Vertical
7440.00	33.46	36.59	11.79	31.78	50.06	74.00	-23.94	Vertical
9920.00	30.80	38.81	14.38	31.88	52.11	74.00	-21.89	Vertical
12400.00	*					74.00		Vertical
14880.00	*					74.00		Vertical
4960.00	39.55	31.93	8.73	32.16	48.05	74.00	-25.95	Horizontal
7440.00	32.22	36.59	11.79	31.78	48.82	74.00	-25.18	Horizontal
9920.00	31.72	38.81	14.38	31.88	53.03	74.00	-20.97	Horizontal
12400.00	*					74.00		Horizontal
14880.00	*					74.00		Horizontal

**Average value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	30.38	31.93	8.73	32.16	38.88	54.00	-15.12	Vertical
7440.00	24.76	36.59	11.79	31.78	41.36	54.00	-12.64	Vertical
9920.00	22.95	38.81	14.38	31.88	44.26	54.00	-9.74	Vertical
12400.00	*					54.00		Vertical
14880.00	*					54.00		Vertical
4960.00	33.04	31.93	8.73	32.16	41.54	54.00	-12.46	Horizontal
7440.00	24.81	36.59	11.79	31.78	41.41	54.00	-12.59	Horizontal
9920.00	24.42	38.81	14.38	31.88	45.73	54.00	-8.27	Horizontal
12400.00	*					54.00		Horizontal
14880.00	*					54.00		Horizontal

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. “\*”, means this data is the too weak instrument of signal is unable to test.

### 8.7 RADIATED BAND EDGE DATA

Remark: All restriction band have been tested, and only the worst case is shown in report

#### Low CH (GFSK)

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	40.20	27.59	5.38	30.18	42.99	74.00	-31.01	Horizontal
2400.00	53.86	27.58	5.39	30.18	56.65	74.00	-17.35	Horizontal
2390.00	39.93	27.59	5.38	30.18	42.72	74.00	-31.28	Vertical
2400.00	53.04	27.58	5.39	30.18	55.83	74.00	-18.17	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	32.68	27.59	5.38	30.18	35.47	54.00	-18.53	Horizontal
2400.00	39.85	27.58	5.39	30.18	42.64	54.00	-11.36	Horizontal
2390.00	32.51	27.59	5.38	30.18	35.30	54.00	-18.70	Vertical
2400.00	41.79	27.58	5.39	30.18	44.58	54.00	-9.42	Vertical

#### High CH(GFSK)

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	43.48	27.53	5.47	29.93	46.55	74.00	-27.45	Horizontal
2500.00	44.66	27.55	5.49	29.93	47.77	74.00	-26.23	Horizontal
2483.50	43.25	27.53	5.47	29.93	46.32	74.00	-27.68	Vertical
2500.00	41.89	27.55	5.49	29.93	45.00	74.00	-29.00	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	33.31	27.53	5.47	29.93	36.38	54.00	-17.62	Horizontal
2500.00	32.53	27.55	5.49	29.93	35.64	54.00	-18.36	Horizontal
2483.50	33.75	27.53	5.47	29.93	36.82	54.00	-17.18	Vertical
2500.00	34.69	27.55	5.49	29.93	37.80	54.00	-16.20	Vertical

Remark:

1. Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

## 9. AVERAGE TIME OF OCCUPANCY


### 9.1 LIMIT

FCC Part 5 (15.247), Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
15.247(a)(1)	Average Time of Occupancy	0.4 sec	2400-2483.5

### 9.2 TEST PROCEDURE

- a. The transmitter output (antenna port) was connected to the spectrum analyzer.
- b. Set RBW =1MHz/VBW =3MHz.
- c. Use a video trigger with the trigger level set to enable triggering only on full pulses.
- d. Sweep Time is more than once pulse time.
- e. Set the center frequency on any frequency would be measure and set the frequency span to zero span.
- f. Measure the maximum time duration of one single pulse.
- g. Set the EUT for DH5, DH3 and DH1 packet transmitting.
- h. Measure the maximum time duration of one single pulse.
- i. DH5 Packet permit maximum  $1600 / 79 / 6 = 3.37$  hops per second in each channel (5 time slots RX, 1 time slot TX). So the number of pulses in the observation period of 31.6 seconds is  $3.37 \times 31.6 = 106.6$ .
- j. DH3 Packet permit maximum  $1600 / 79 / 4 = 5.06$  hops per second in each channel (3 time slots RX, 1 time slot TX). So the number of pulses in the observation period of 31.6 seconds is  $5.06 \times 31.6 = 160$ .
- k. DH1 Packet permit maximum  $1600 / 79 / 2 = 10.12$  hops per second in each channel (1 time slot RX, 1 time slot TX). So the number of pulses in the observation period of 31.6 seconds is  $10.12 \times 31.6 = 320$ .


### 9.3 TEST SETUP

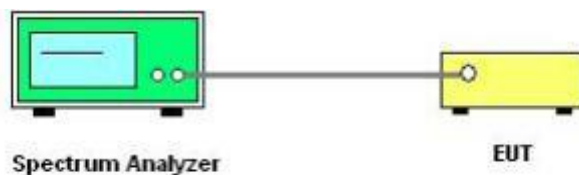


### 9.4 TEST RESULTS

AVERAGE TIME OF OCCUPANCY							
CONDITION	MODE	FREQUENCY(MHZ)	PULSE TIME(MS)	AVERAGE TIME OF OCCUPANCY(MS)	LIMIT(MS)	BURST NUMBER	RESULTS
NVNT	1DH1	2402	0.411	131.237	400	319	PASS
NVNT	1DH1	2441	0.408	130.560	400	320	PASS
NVNT	1DH1	2480	0.409	131.353	400	321	PASS
NVNT	1DH3	2402	1.676	261.503	400	156	PASS
NVNT	1DH3	2441	1.676	264.855	400	158	PASS
NVNT	1DH3	2480	1.673	259.346	400	155	PASS
NVNT	1DH3	2402	0.348	109.968	400	174	PASS
NVNT	1DH3	2441	0.348	109.968	400	174	PASS
NVNT	1DH3	2480	0.347	109.652	400	171	PASS

### 9.5 ORIGINAL TEST DATA

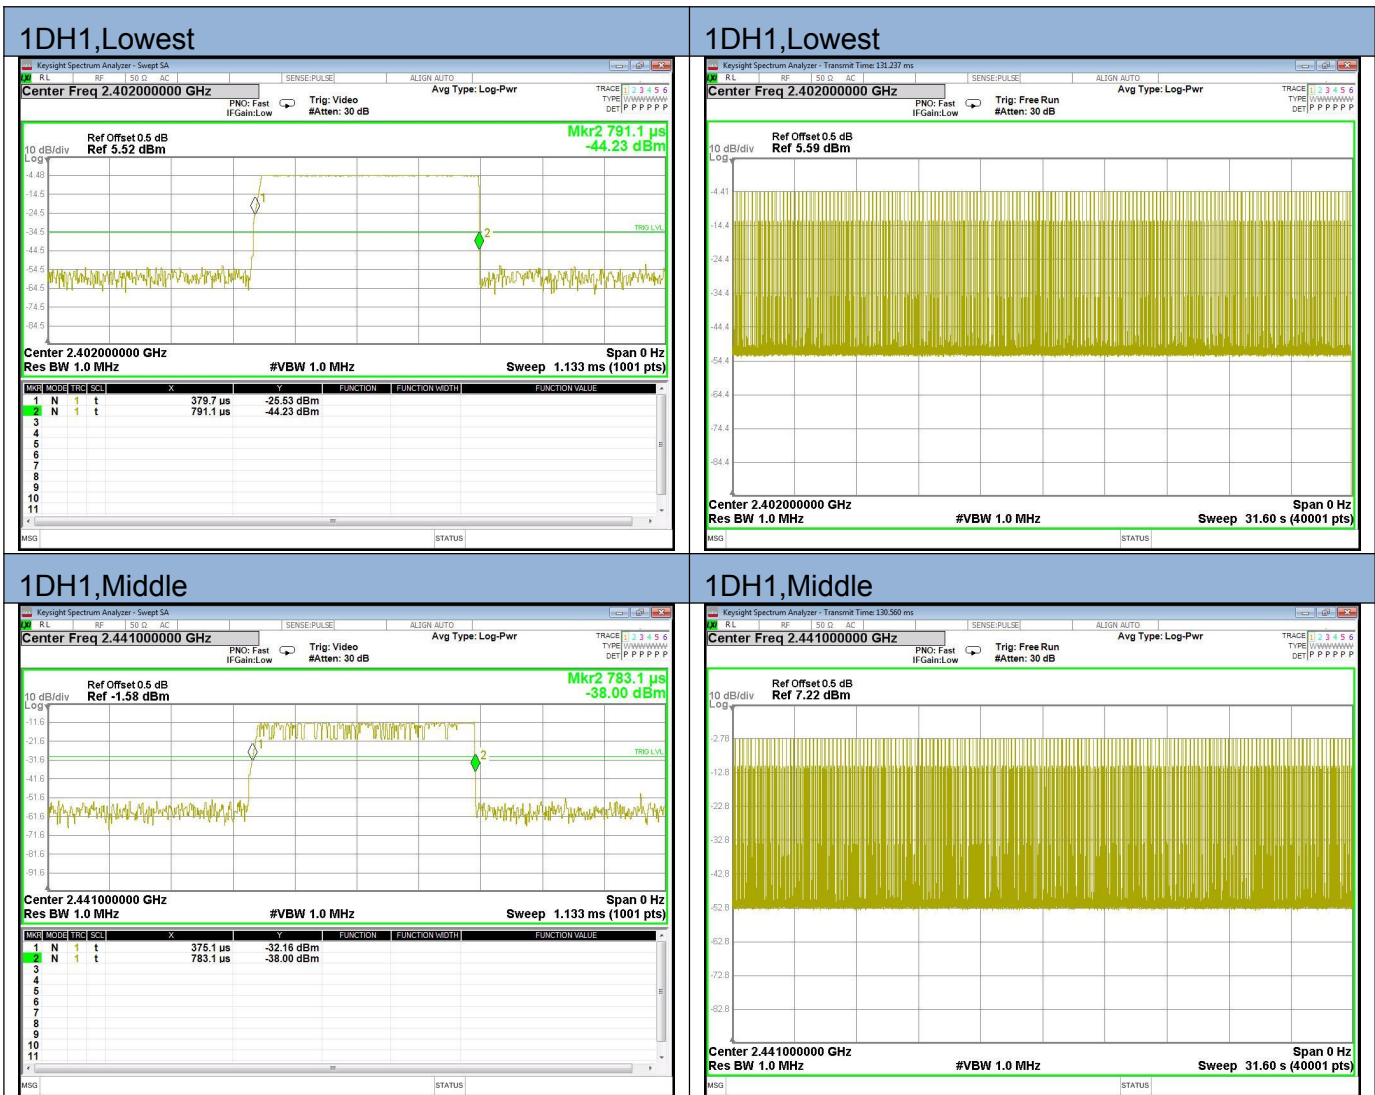


### 1DH1, Highest

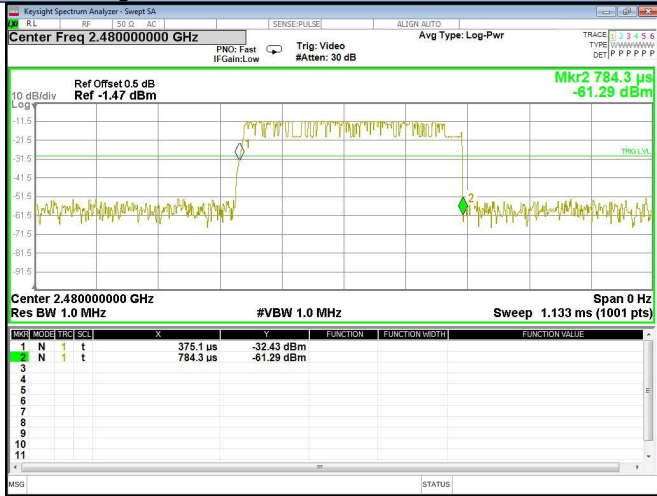

### 1DH1, Highest



### 1DH3, Lowest

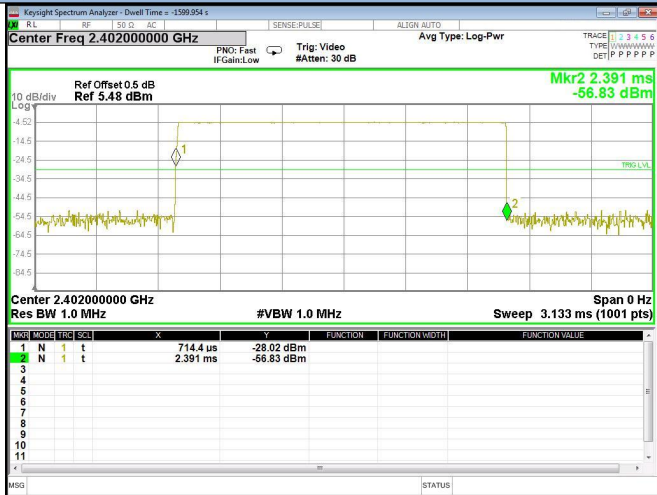

### 1DH3, Lowest







### 1DH3, Middle



### 1DH3, Middle



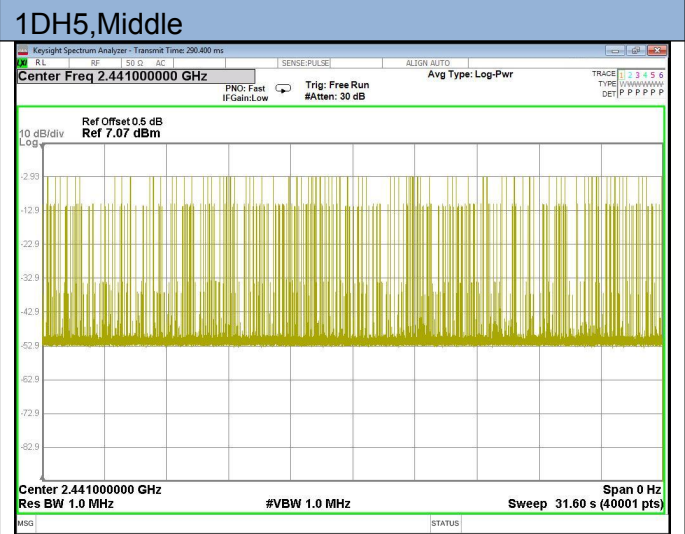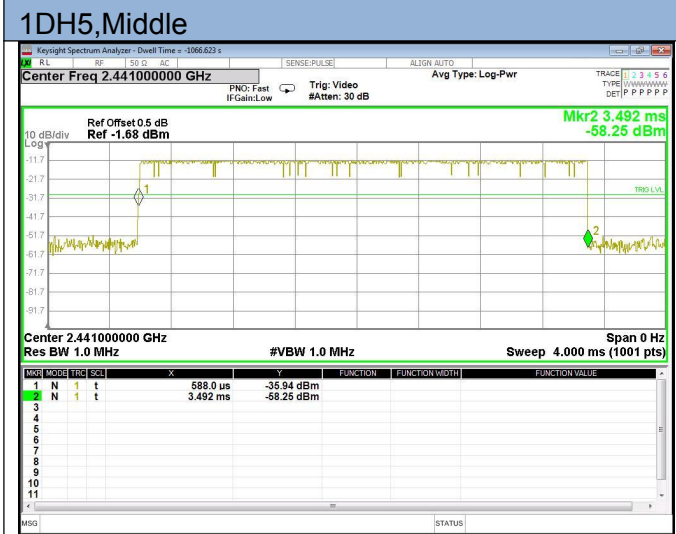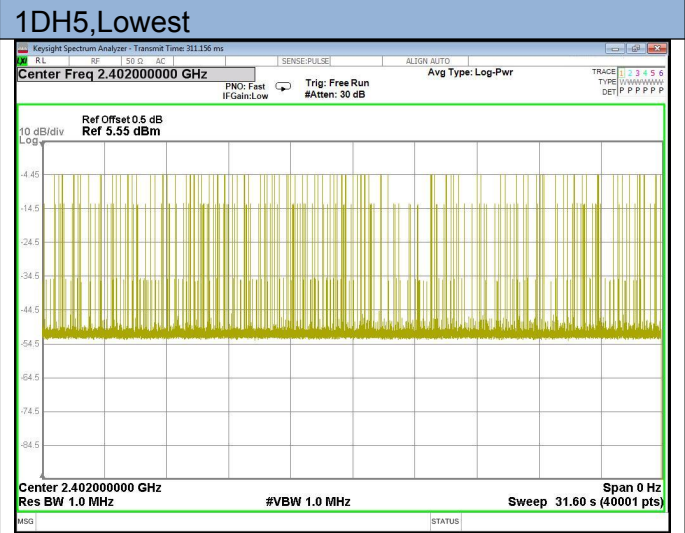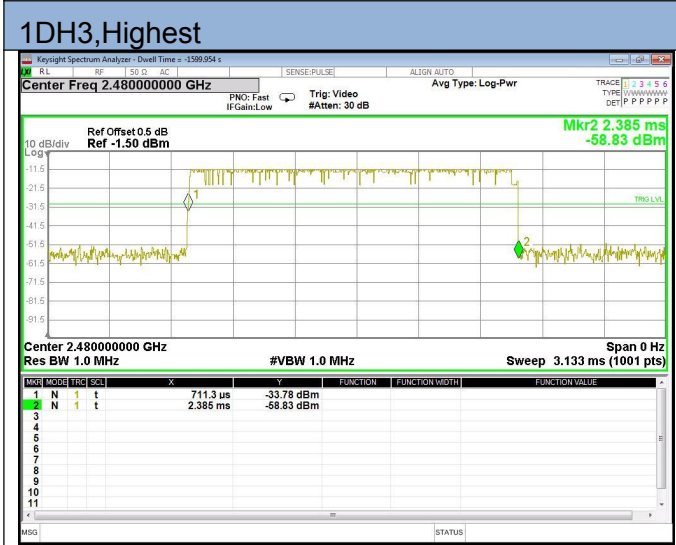



## 10. HOPPING CHANNEL SEPARATION MEASUREMENT

### 10.1 LIMIT


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> 20 dB Bandwidth or Channel Separation
RB	30 kHz (20dB Bandwidth) / 30 kHz (Channel Separation)
VB	100 kHz (20dB Bandwidth) / 100 kHz (Channel Separation)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

### 10.2 TEST PROCEDURE

- The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
- The resolution bandwidth of 30 kHz and the video bandwidth of 100 kHz were utilised for 20 dB bandwidth measurement.
- The resolution bandwidth of 30 kHz and the video bandwidth of 100 kHz were utilised for channel separation measurement

### 10.3 TEST SETUP

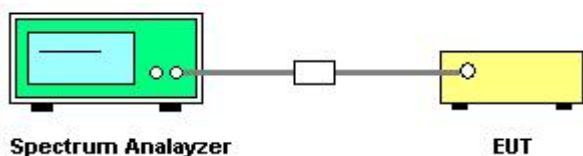

### 10.4 EUT OPERATION CONDITIONS


The EUT was programmed to be in continuously transmitting mode.




### 10.5 TEST RESULTS

Temperature:	25 °C	Relative Humidity:	60%
Test Mode:	GFSK Mode	Test Voltage:	DC 5V

Modulation	Frequency (MHz)	Mark1 Frequency (MHz)	Mark2 Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)	Result
GFSK	2402	2401.870	2402.868	0.998	0.56	Pass
	2441	2440.872	2441.872	1.000	0.62	Pass
	2480	2478.872	2479.874	1.002	0.65	Pass

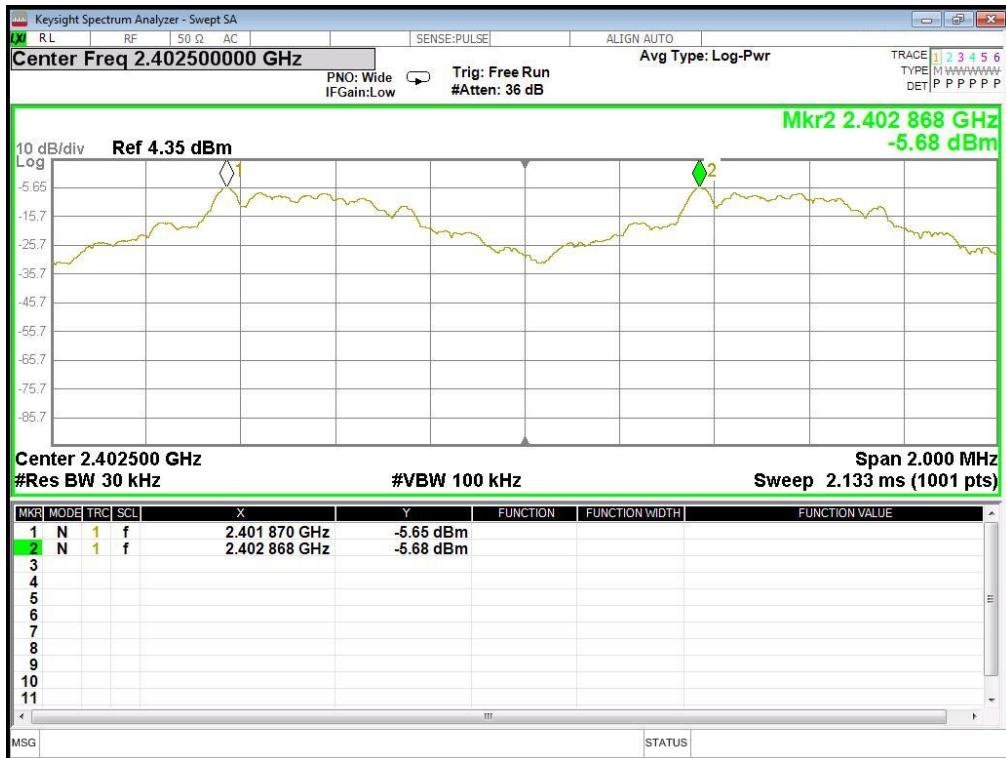

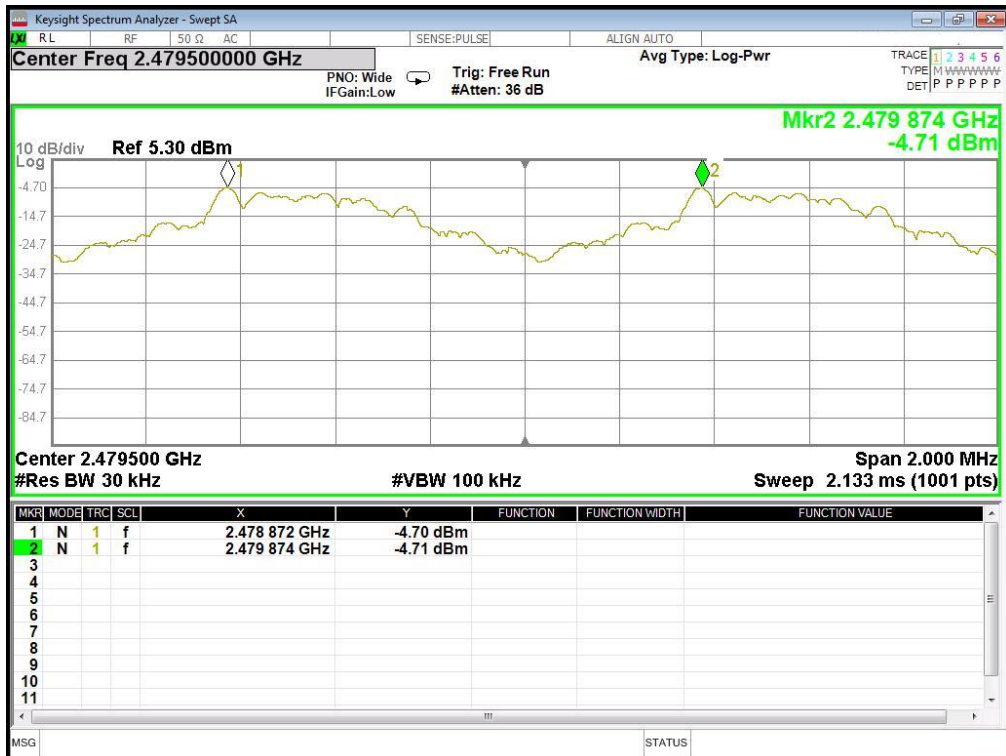

## 11. ANTENNA REQUIREMENT

### 11.1 STANDARD REQUIREMENT

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### 11.2 RESULT

The antennas used for this product are PCB Antenna and no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is -0.58dBi.

\*\*\*\*\*END OF THE REPORT\*\*\*\*\*