

FCC REPORT

(Bluetooth)

Applicant: 8devices

Address of Applicant: Gedimino 47, Kaunas, LT-44242, Lithuania

Equipment Under Test (EUT)

Product Name: Broadband Digital Transmission System

Model No.: BLUE bean A, BLUE bean C, RED bean A, RED bean C

FCC ID: Z9W-MB

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247

Date of sample receipt: 28. Mar., 2019

Date of Test: 29. Mar., to 26 May, 2019

Date of report issued: 27 May, 2019

Test Result: PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Bruce Zhang
Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the CCIS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2 Version

Version No.	Date	Description
00	27 May., 2019	Original

Tested by:

Mike.ou

Date:

27 May, 2019

Test Engineer

Reviewed by:

Wimer Zhang

Date:

27 May, 2019

Project Engineer

3 Contents

	Page
1 COVER PAGE.....	1
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY.....	4
5 GENERAL INFORMATION.....	5
5.1 CLIENT INFORMATION	5
5.2 GENERAL DESCRIPTION OF E.U.T.	5
5.3 TEST ENVIRONMENT AND TEST MODE	6
5.4 DESCRIPTION OF SUPPORT UNITS	6
5.5 MEASUREMENT UNCERTAINTY.....	6
5.6 LABORATORY FACILITY	7
5.7 LABORATORY LOCATION	7
5.8 TEST INSTRUMENTS LIST.....	7
6 TEST RESULTS AND MEASUREMENT DATA	错误!未定义书签。
6.1 ANTENNA REQUIREMENT.....	错误!未定义书签。
6.2 CONDUCTED EMISSIONS	8
6.3 CONDUCTED OUTPUT POWER	13
6.4 20dB OCCUPY BANDWIDTH	16
6.5 CARRIER FREQUENCIES SEPARATION.....	19
6.6 HOPPING CHANNEL NUMBER.....	23
6.7 DWELL TIME	25
6.8 PSEUDORANDOM FREQUENCY HOPPING SEQUENCE	28
6.9 BAND EDGE.....	29
6.9.1 Conducted Emission Method	29
6.9.2 Radiated Emission Method	33
6.10 SPURIOUS EMISSION.....	70
6.10.1 Conducted Emission Method.....	70
6.10.2 Radiated Emission Method.....	73
7 TEST SETUP PHOTO	86
8 EUT CONSTRUCTIONAL DETAILS.....	90

4 Test Summary

Test Items	Section in CFR 47	Result
Antenna Requirement	15.203 & 15.247 (b)	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Peak Output Power	15.247 (b)(1)	Pass
20dB Occupied Bandwidth	15.247 (a)(1)	Pass
Carrier Frequencies Separation	15.247 (a)(1)	Pass
Hopping Channel Number	15.247 (a)(1)	Pass
Dwell Time	15.247 (a)(1)	Pass
Spurious Emission	15.205 & 15.209	Pass
Band Edge	15.247(d)	Pass
<p><i>Pass: The EUT complies with the essential requirements in the standard.</i> <i>N/A: Not Applicable.</i></p>		

5 General Information

5.1 Client Information

Applicant:	8devices
Address:	Gedimino 47, Kaunas, LT-44242, Lithuania
Manufacturer/ Factory:	8devices
Address:	Gedimino 47, Kaunas, LT-44242, Lithuania

5.2 General Description of E.U.T.

Product Name:	Broadband Digital Transmission System
Model No.:	BLUE bean A, BLUE bean C, RED bean A, RED bean C
Operation Frequency:	2402MHz~2480MHz
Transfer rate:	1/2/3 Mbits/s
Number of channel:	79
Modulation type:	GFSK, $\pi/4$ -DQPSK, 8DPSK
Modulation technology:	FHSS
Antenna Type:	Ceramic Antenna External antenna
Antenna gain:	Ceramic Antenna: 3.0 dBi External antenna A: 4.0 dBi External antenna B: 3.2 dBi
Power supply:	DC 3.3V
Remarks:	<p>The No.: BLUE bean A and BLUE bean C, RED bean A and RED bean C identical inside, the electrical circuit design, layout, components used and internal wiring up to RF output. with only difference as follow:</p> <ol style="list-style-type: none"> 1. BLUE bean C and RED bean C RF output is connected to connector Murata HSC, BLUE bean A and RED bean A RF output is connected to connector Murata HSC and connected to antenna, to accommodate antenna PCB length is increased, antenna, antennas passive components and RF probe switch added to PCB. 2. Modules use different version of chip BLUE bean Qualcomm QCA9377-7 and RED bean Qualcomm QCA9377-3. 3. QCA9377-7 and QCA9377-3 only differs what interface it uses to connect to WIFI and BT. 4. BLUE bean QCA9377-7 uses USB2.0 for WIFI and USB1.1 for BT. 5. RED bean QCA9377-3 uses SDIO3.0 for WIFI and UART/PCM for BT. 6. Circuit design, layout components used and internal wiring for interface connection is different. 7. Pinout for module is different
Test Sample Condition:	The test samples were provided in good working order with no visible defects.

Operation Frequency each of channel for GFSK, $\pi/4$ -DQPSK, 8DPSK							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	20	2422MHz	40	2442MHz	60	2462MHz
1	2403MHz	21	2423MHz	41	2443MHz	61	2463MHz
2	2404MHz	22	2424MHz	42	2444MHz	62	2464MHz
3	2405MHz	23	2425MHz	43	2445MHz	63	2465MHz
4	2406MHz	24	2426MHz	44	2446MHz	64	2466MHz
5	2407MHz	25	2427MHz	45	2447MHz	65	2467MHz
...
15	2417MHz	35	2437MHz	55	2457MHz	75	2477MHz
16	2418MHz	36	2438MHz	56	2458MHz	76	2478MHz
17	2419MHz	37	2439MHz	57	2459MHz	77	2479MHz
18	2420MHz	38	2440MHz	58	2460MHz	78	2480MHz
19	2421MHz	39	2441MHz	59	2461MHz		

Remark: Channel 0, 39 & 78 selected for GFSK, $\pi/4$ -DQPSK and 8DPSK.

5.3 Test environment and test mode

Operating Environment:	
Temperature:	24.0 °C
Humidity:	54 % RH
Atmospheric Pressure:	1010 mbar
Test Modes:	
Non-hopping mode:	Keep the EUT in continuous transmitting mode with worst case data rate.
Hopping mode:	Keep the EUT in hopping mode.
Remark	GFSK (1 Mbps) is the worst case mode and <i>during the test, pre-scan BLUE bean A, BLUE bean C, RED bean A, RED bean C, found BLUE bean A, was worse case. The report only reflects the worst case.</i>

The sample was placed 0.8m (below 1GHz)/1.5m (above 1GHz) above the ground plane of 3m chamber*. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working with a fresh battery, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

5.4 Description of Support Units

Manufacturer	Description	Model	S/N	FCC ID/DoC
LENOVO	Laptop	SL510	2847A65	DoC
ULEFONE	Adapter	HJ-0503000K7-EU	N/A	N/A
baofeng	Test suite	Pi3B+SD	N/A	N/A

5.5 Measurement Uncertainty

Parameters	Expanded Uncertainty
Conducted Emission (9kHz ~ 30MHz)	±1.60 dB (k=2)
Radiated Emission (9kHz ~ 30MHz)	±3.12 dB (k=2)
Radiated Emission (30MHz ~ 1000MHz)	±4.54 dB (k=2)
Radiated Emission (1GHz ~ 18GHz)	±5.84 dB (k=2)
Radiated Emission (18GHz ~ 40GHz)	±3.36 dB (k=2)

5.6 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC - Registration No.: 727551**

Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been accredited as a testing laboratory by FCC (Federal Communications Commission). The Registration No. is 727551.

- **IC - Registration No.: 10106A-1**

The 3m Semi-anechoic chamber of Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

- **CNAS - Registration No.: CNAS L6048**

Shenzhen Zhongjian Nanfang Testing Co., Ltd. is accredited to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L6048.

- **A2LA - Registration No.: 4346.01**

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: <https://portal.a2la.org/scopepdf/4346-01.pdf>

5.7 Laboratory Location

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
 Address: No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
 Bao'an District, Shenzhen, Guangdong, China
 Tel: +86-755-23118282, Fax: +86-755-23116366
 Email: info@ccis-cb.com, Website: http://www.ccis-cb.com

5.8 Test Instruments list

Radiated Emission:					
Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
3m SAC	SAEMC	9m*6m*6m	966	07-22-2017	07-21-2020
Loop Antenna	SCHWARZBECK	FMZB1519B	00044	03-18-2019	03-17-2020
BiConiLog Antenna	SCHWARZBECK	VULB9163	497	03-18-2019	03-17-2020
Horn Antenna	SCHWARZBECK	BBHA9120D	916	03-18-2019	03-17-2020
Horn Antenna	SCHWARZBECK	BBHA9120D	1805	06-22-2017	06-21-2020
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170582	11-21-2018	11-20-2019
EMI Test Software	AUDIX	E3	Version: 6.110919b		
Pre-amplifier	HP	8447D	2944A09358	03-18-2019	03-17-2020
Pre-amplifier	CD	PAP-1G18	11804	03-18-2019	03-17-2020
Spectrum analyzer	Rohde & Schwarz	FSP30	101454	03-18-2019	03-17-2020
Spectrum analyzer	Rohde & Schwarz	FSP40	100363	11-21-2018	11-20-2019
EMI Test Receiver	Rohde & Schwarz	ESRP7	101070	03-18-2019	03-17-2020
Cable	ZDECL	Z108-NJ-NJ-81	1608458	03-18-2019	03-17-2020
Cable	MICRO-COAX	MFR64639	K10742-5	03-18-2019	03-17-2020
Cable	SUHNER	SUCOFLEX100	58193/4PE	03-18-2019	03-17-2020
RF Switch Unit	MWRFTTEST	MW200	N/A	N/A	N/A
Test Software	MWRFTTEST	MTS8200	Version: 2.0.0.0		


Conducted Emission:					
Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
EMI Test Receiver	Rohde & Schwarz	ESCI	101189	03-18-2019	03-17-2020
Pulse Limiter	SCHWARZBECK	OSRAM 2306	9731	03-18-2019	03-17-2020
LISN	CHASE	MN2050D	1447	03-18-2019	03-17-2020
LISN	Rohde & Schwarz	ESH3-Z5	8438621/010	07-21-2018	07-20-2019
Cable	HP	10503A	N/A	03-18-2019	03-17-2020
EMI Test Software	AUDIX	E3	Version: 6.110919b		

6 Test results and Measurement Data

6.1 Antenna requirement

Standard requirement:	FCC Part 15 C Section 15.203 /247(b)								
<p>15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>15.247(b) (4) requirement: (4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p>									
E.U.T Antenna:									
<p><i>The product is a professionally installed device which has two types of antennas for the application. The antennas information as below table:</i></p> <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th>Antenna Type</th> <th>Antenna Gain (dBi)</th> </tr> </thead> <tbody> <tr> <td>Ceramic Antenna</td> <td>3</td> </tr> <tr> <td>External antenna A</td> <td>4</td> </tr> <tr> <td>External antenna B</td> <td>3.2</td> </tr> </tbody> </table> <p><i>According to above information, the antennas meet the requirements of this section</i></p>		Antenna Type	Antenna Gain (dBi)	Ceramic Antenna	3	External antenna A	4	External antenna B	3.2
Antenna Type	Antenna Gain (dBi)								
Ceramic Antenna	3								
External antenna A	4								
External antenna B	3.2								

Ceramic Antenna:

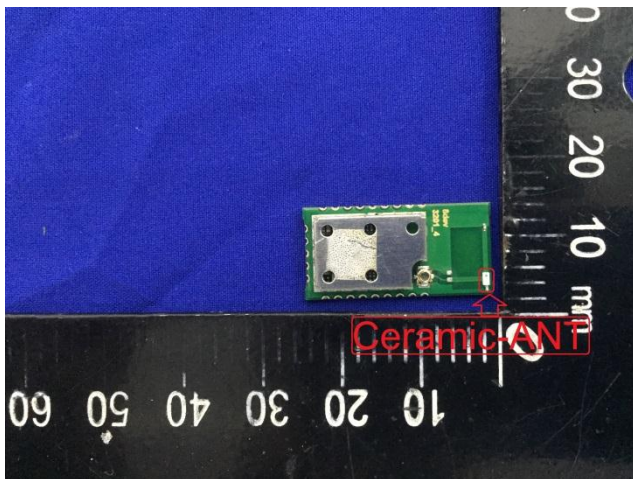

External antenna A:



External antenna B:




6.2 Conducted Emissions

Test Requirement:	FCC Part 15 C Section 15.207		
Test Method:	ANSI C63.10:2013		
Test Frequency Range:	150 kHz to 30 MHz		
Class / Severity:	Class B		
Receiver setup:	RBW=9 kHz, VBW=30 kHz, Sweep time=auto		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
* Decreases with the logarithm of the frequency.			
Test setup:	<p>Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p>		
Test procedure:	<ol style="list-style-type: none"> 1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2014 on conducted measurement. 		
Test Instruments:	Refer to section 5.8 for details		
Test mode:	Hopping mode		
Test results:	Pass		

Measurement Data:

Product name:	Broadband Digital Transmission System	Product model:	BLUE BEAN A
Test by:	Mike	Test mode:	BT Tx mode
Test frequency:	150 kHz ~ 30 MHz	Phase:	Line
Test voltage:	AC 120 V/60 Hz	Environment:	Temp: 22.5°C Humi: 55%

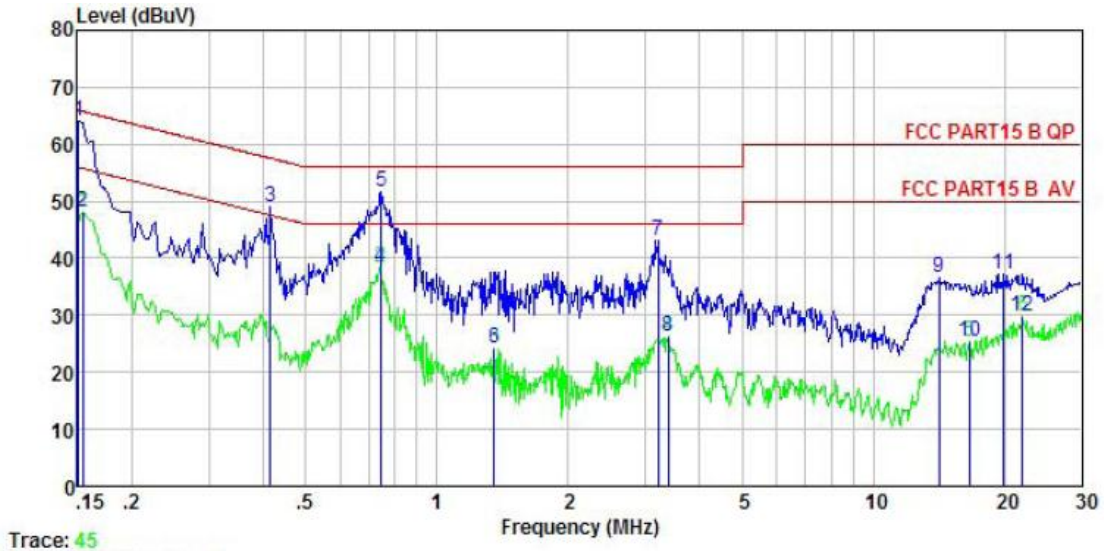


Trace: 45

	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.151	53.79	-0.45	10.78	64.12	65.96	-1.84	QP
2	0.154	37.92	-0.45	10.78	48.25	55.78	-7.53	Average
3	0.415	38.66	-0.37	10.73	49.02	57.55	-8.53	QP
4	0.743	28.07	-0.38	10.79	38.48	46.00	-7.52	Average
5	0.747	41.20	-0.38	10.79	51.61	56.00	-4.39	QP
6	1.352	13.54	-0.39	10.91	24.06	46.00	-21.94	Average
7	3.207	32.78	-0.45	10.91	43.24	56.00	-12.76	QP
8	3.381	15.89	-0.45	10.91	26.35	46.00	-19.65	Average
9	14.138	26.37	-0.67	10.91	36.61	60.00	-23.39	QP
10	16.573	15.31	-0.78	10.91	25.44	50.00	-24.56	Average
11	19.950	27.19	-0.97	10.93	37.15	60.00	-22.85	QP
12	21.946	19.77	-1.00	10.91	29.68	50.00	-20.32	Average

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss.

Product name:	Broadband Digital Transmission System	Product model:	BLUE BEAN A
Test by:	Mike	Test mode:	BT Tx mode
Test frequency:	150 kHz ~ 30 MHz	Phase:	Neutral
Test voltage:	AC 120 V/60 Hz	Environment:	Temp: 22.5°C Humi: 55%

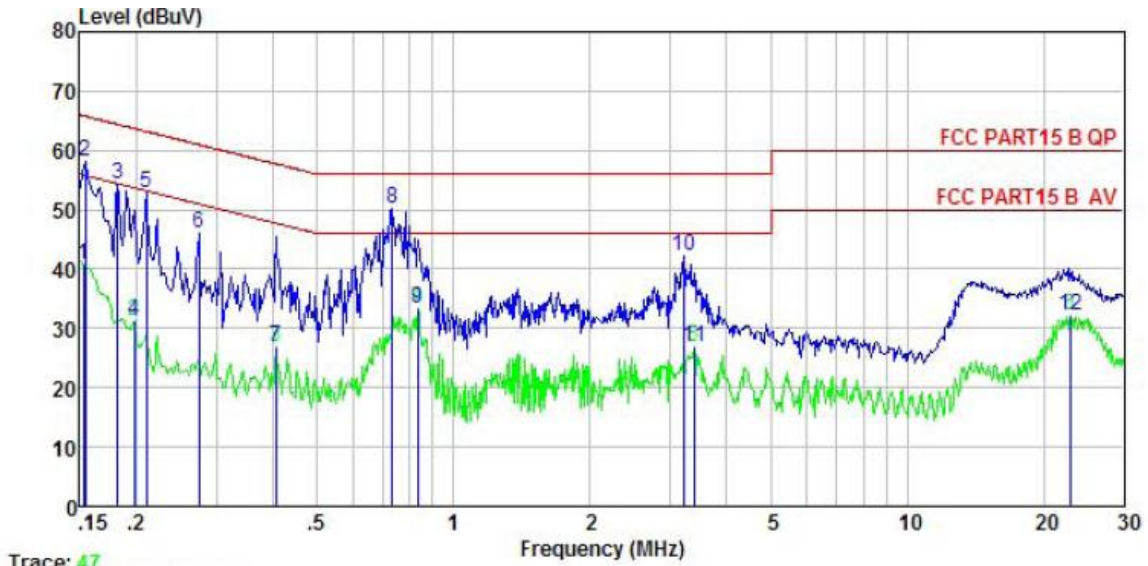


	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.153	30.59	-0.68	10.78	40.69	55.82	-15.13	Average
2	0.154	48.06	-0.68	10.78	58.16	65.78	-7.62	QP
3	0.182	44.15	-0.69	10.77	54.23	64.42	-10.19	QP
4	0.198	21.12	-0.69	10.76	31.19	53.71	-22.52	Average
5	0.211	42.76	-0.68	10.76	52.84	63.18	-10.34	QP
6	0.274	36.04	-0.64	10.74	46.14	60.98	-14.84	QP
7	0.406	16.81	-0.64	10.72	26.89	47.73	-20.84	Average
8	0.731	40.03	-0.64	10.78	50.17	56.00	-5.83	QP
9	0.835	23.24	-0.64	10.82	33.42	46.00	-12.58	Average
10	3.224	31.85	-0.68	10.91	42.08	56.00	-13.92	QP
11	3.381	16.67	-0.68	10.91	26.90	46.00	-19.10	Average
12	22.896	22.64	-1.43	10.89	32.10	50.00	-17.90	Average

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss.


6.3 Conducted Output Power

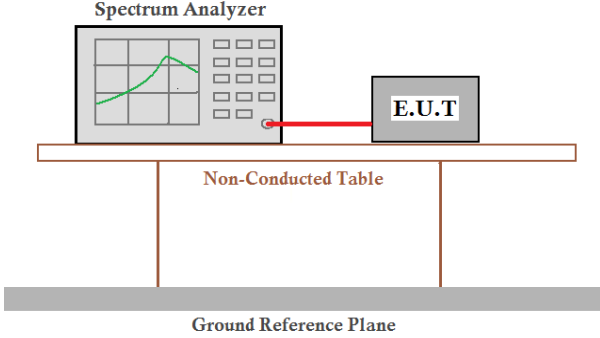Test Requirement:	FCC Part 15 C Section 15.247 (b)(1)
Test Method:	ANSI C63.10:2013 and KDB 558074
Receiver setup:	RBW=1MHz, VBW=3MHz, Detector=Peak (If 20dB BW ≤1 MHz) RBW=3MHz, VBW=10MHz, Detector=Peak (If 20dB BW > 1 MHz and < 3MHz)
Limit:	For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.</p>
Test Instruments:	Refer to section 5.8 for details
Test mode:	Non-hopping mode
Test results:	Pass


Measurement Data:

Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
GFSK mode			
Lowest channel	5.95	30.00	Pass
Middle channel	6.10	30.00	Pass
Highest channel	5.97	30.00	Pass
$\pi/4$ -DQPSK mode			
Lowest channel	6.87	21.00	Pass
Middle channel	7.08	21.00	Pass
Highest channel	6.96	21.00	Pass
8DPSK mode			
Lowest channel	6.35	21.00	Pass
Middle channel	6.53	21.00	Pass
Highest channel	6.44	21.00	Pass

Test plot as follows:

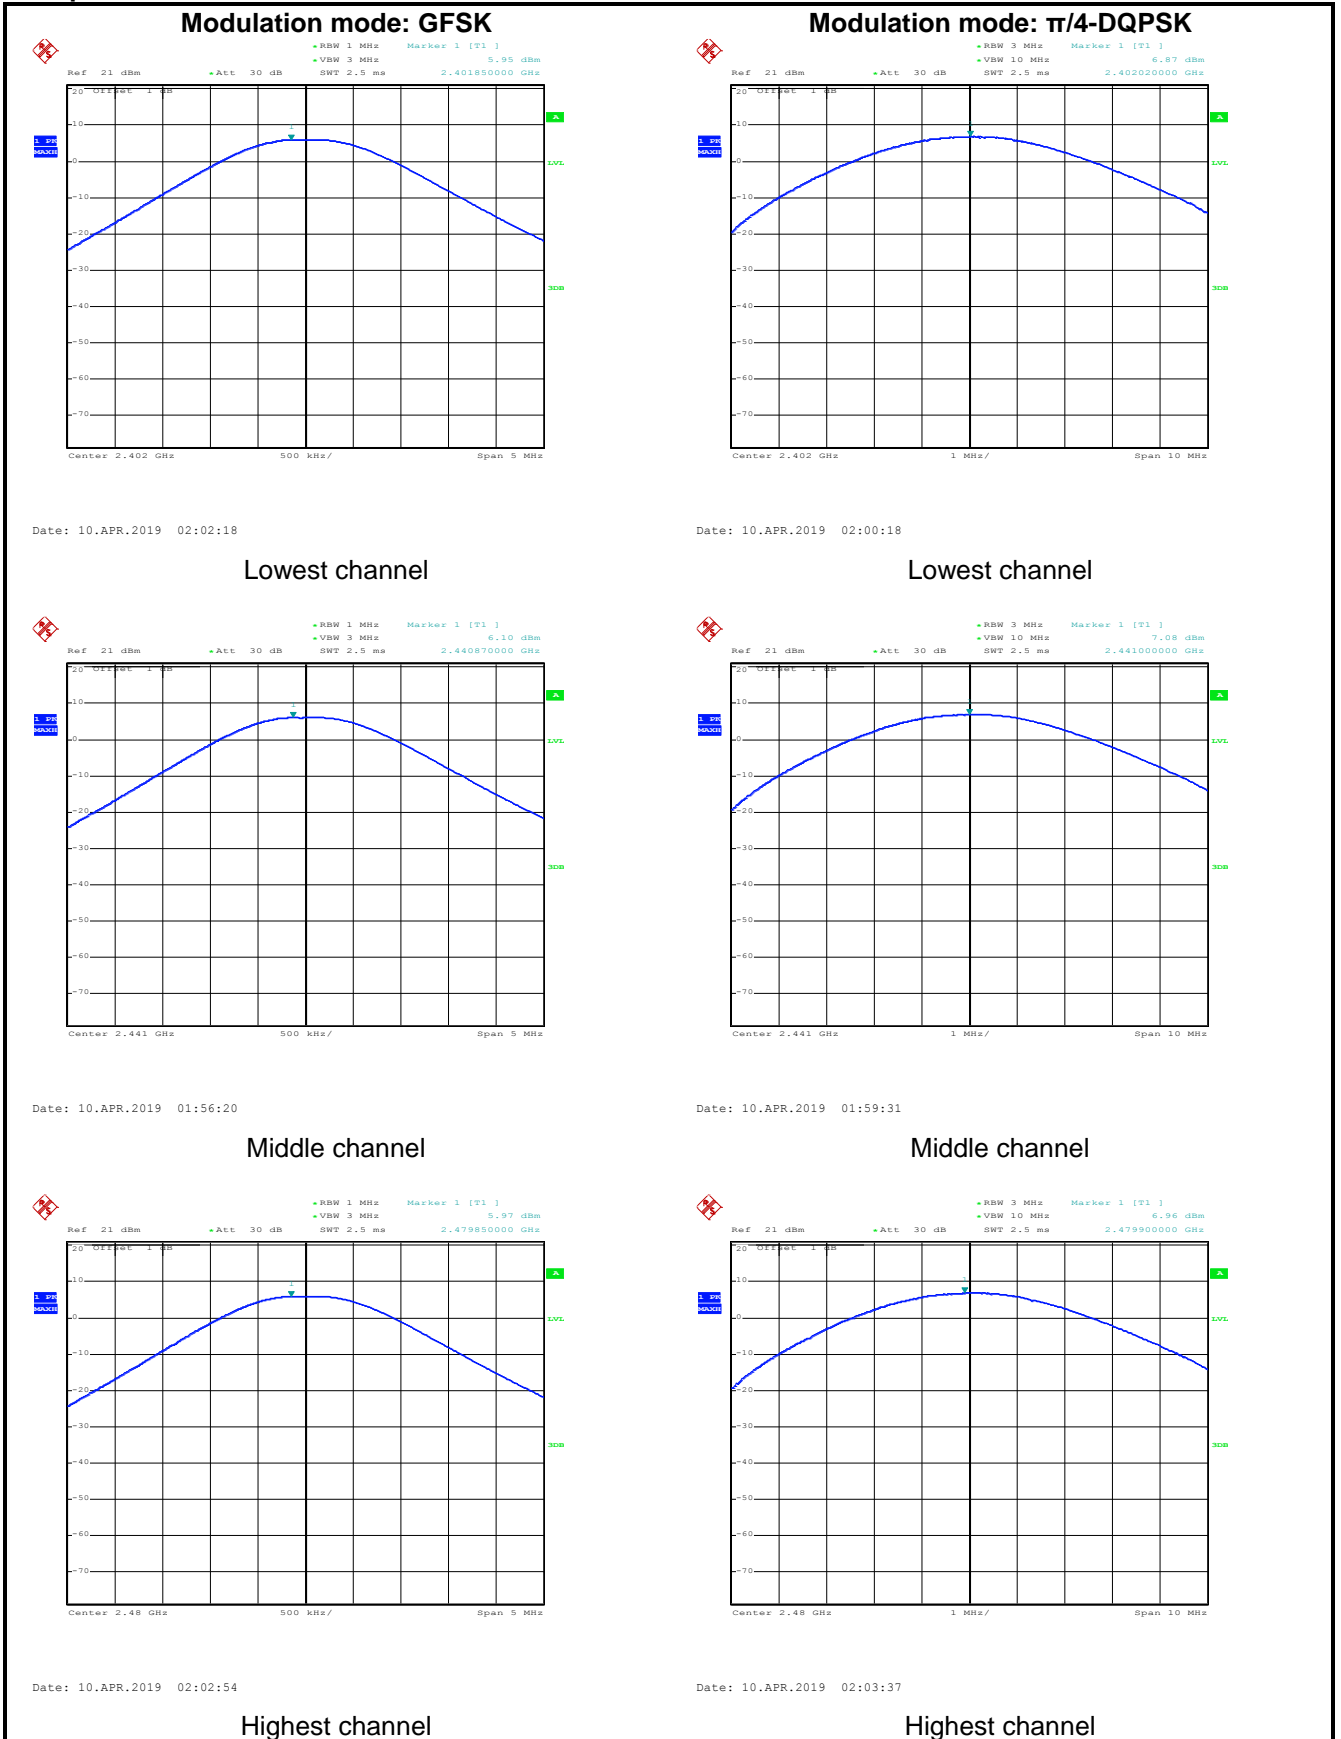


Modulation mode: 8DPSK

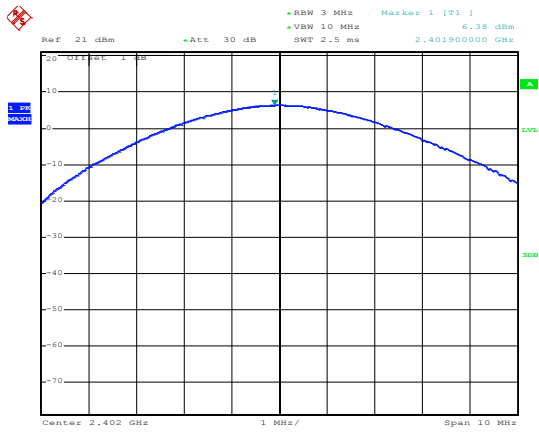


Date: 10.APR.2019 02:00:47

Lowest channel

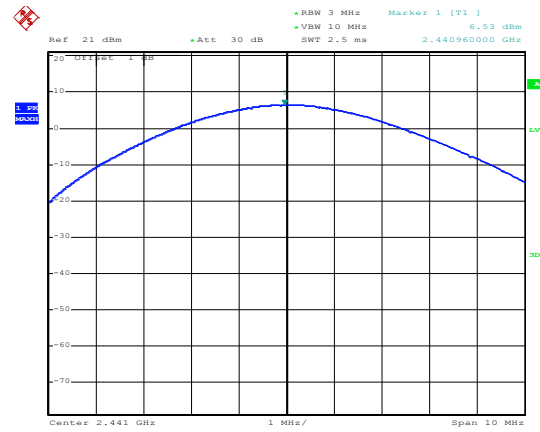

Date: 10.APR.2019 01:58:55


Middle channel

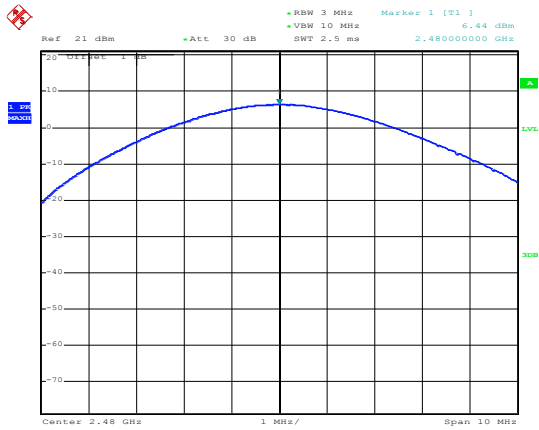

Date: 10.APR.2019 02:04:11

Highest channel


6.4 20dB Occupy Bandwidth

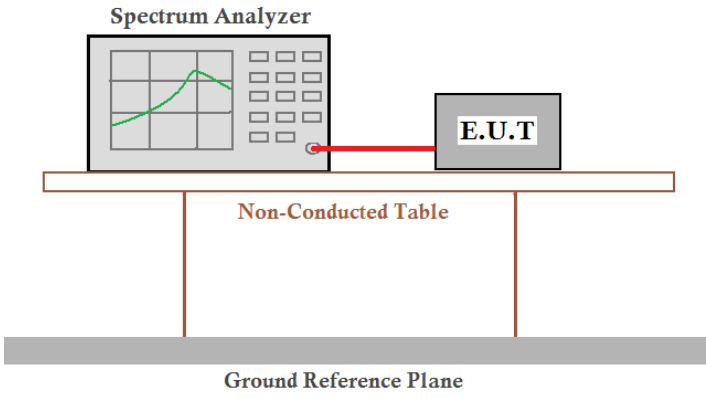Test Requirement:	FCC Part 15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013 and KDB 558074
Receiver setup:	RBW=30 kHz, VBW=100 kHz, detector=Peak
Limit:	N/A
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.</p>
Test Instruments:	Refer to section 5.8 for details
Test mode:	Non-hopping mode
Test results:	Pass


Measurement Data:

Test channel	20dB Occupy Bandwidth (kHz)		
	GFSK	$\pi/4$ -DQPSK	8DPSK
Lowest	928	1272	1248
Middle	924	1272	1236
Highest	924	1272	1230

Test plot as follows:

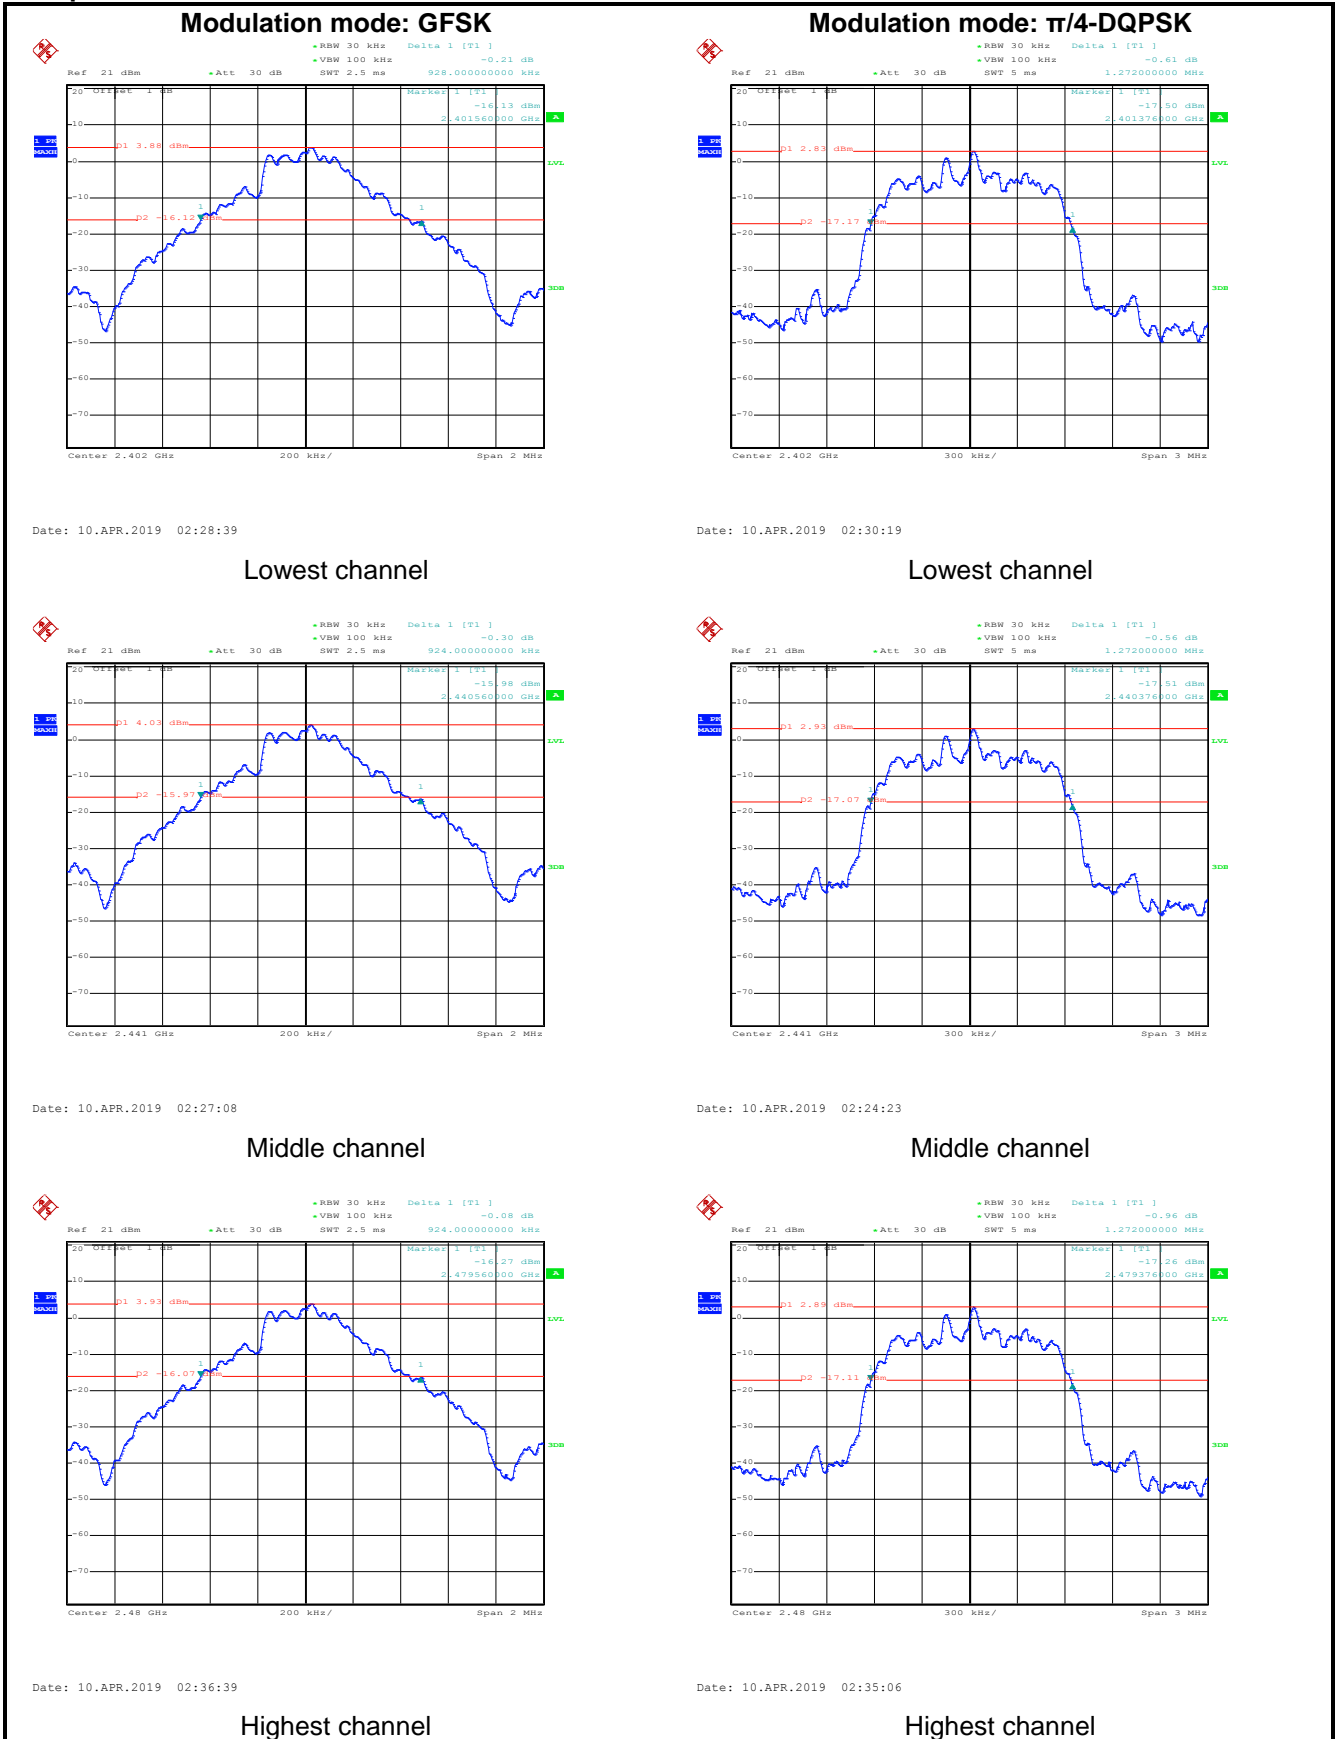


Modulation mode: 8DPSK

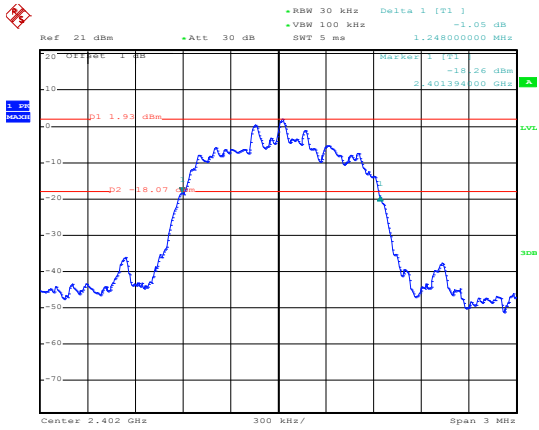


Date: 10.APR.2019 02:31:38

Lowest channel

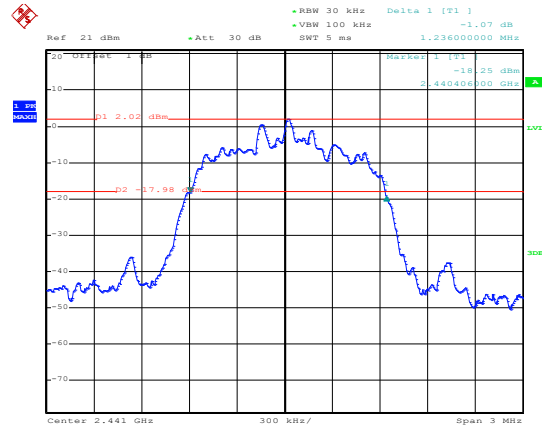

Date: 10.APR.2019 02:25:49


Middle channel

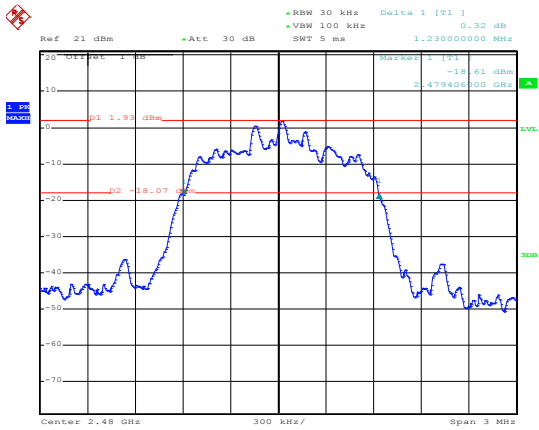

Date: 10.APR.2019 02:33:21

Highest channel

6.5 Carrier Frequencies Separation

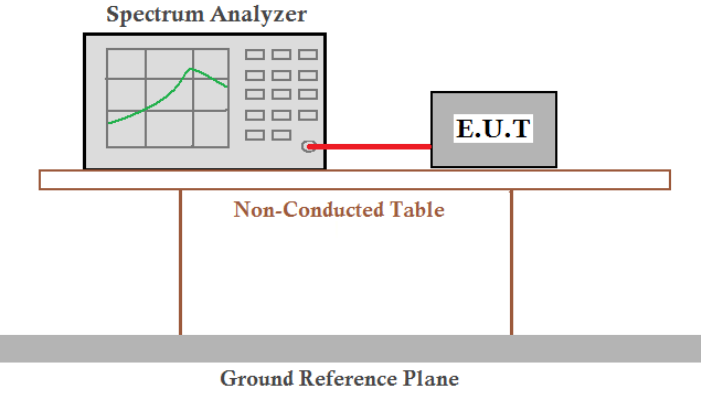Test Requirement:	FCC Part 15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013 and KDB 558074
Receiver setup:	RBW=100 kHz, VBW=300 kHz, detector=Peak
Limit:	a) 0.025MHz or the 20dB bandwidth (whichever is greater) b) 0.025MHz or two-thirds of the 20dB bandwidth (whichever is greater)
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by a Ground Reference Plane.</p>
Test Instruments:	Refer to section 5.8 for details
Test mode:	Hopping mode
Test results:	Pass


Measurement Data:

Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result
GFSK			
Lowest	1000	928.00	Pass
Middle	1000	928.00	Pass
Highest	1008	928.00	Pass
$\pi/4$ -DQPSK mode			
Lowest	1000	848.00	Pass
Middle	1000	848.00	Pass
Highest	1000	848.00	Pass
8DPSK mode			
Lowest	1000	832.00	Pass
Middle	1004	832.00	Pass
Highest	1000	832.00	Pass


Note: According to section 6.4

Mode	20dB bandwidth (kHz) (worse case)	Limit (kHz) (Carrier Frequencies Separation)
GFSK	928	928.00
$\pi/4$ -DQPSK	1272	848.00
8DPSK	1248	832.00

Test plot as follows:

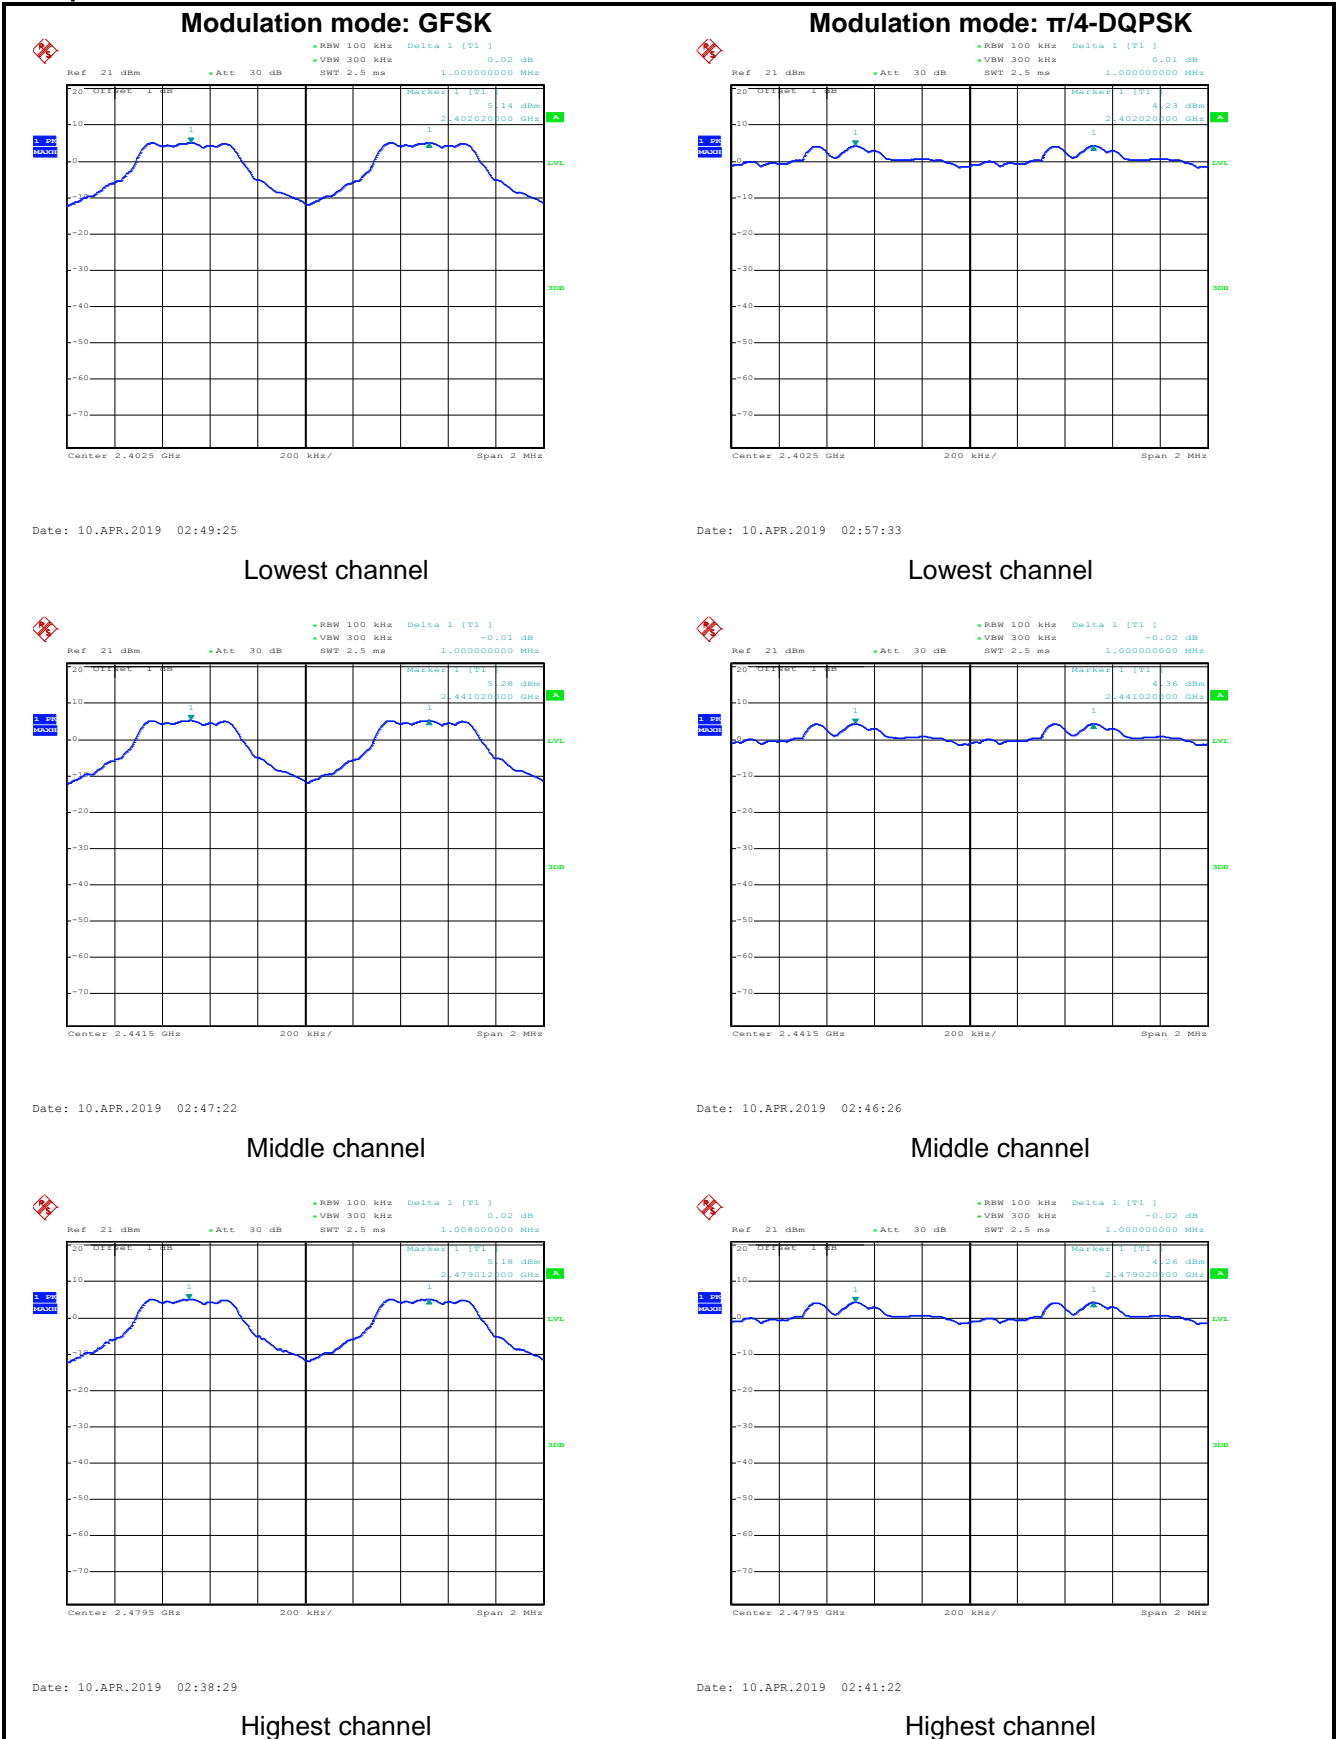


Modulation mode: 8DPSK

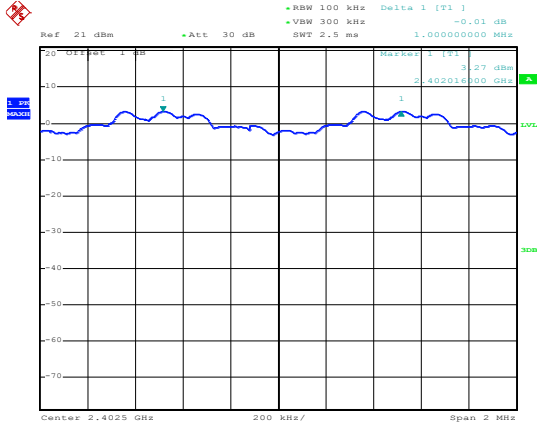


Date: 10.APR.2019 02:59:03

Lowest channel

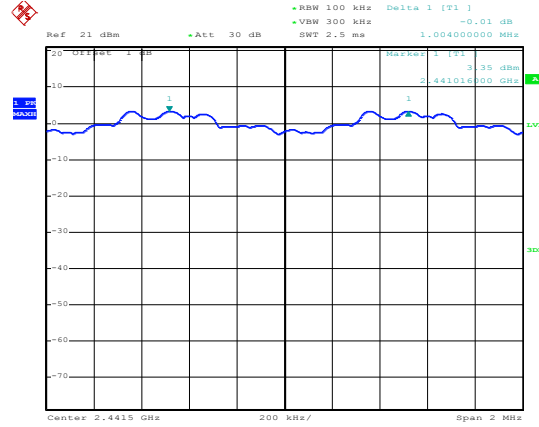

Date: 10.APR.2019 02:44:41


Middle channel

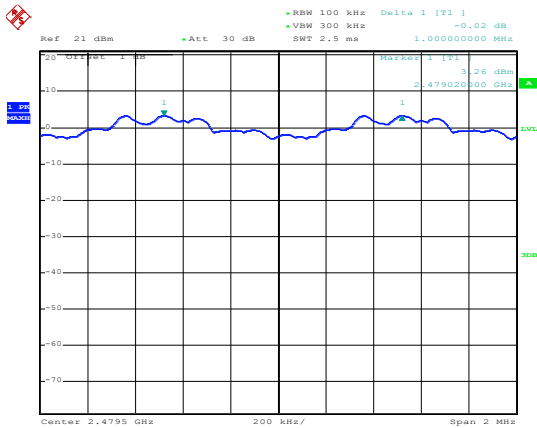

Date: 10.APR.2019 02:43:14

Highest channel


6.6 Hopping Channel Number

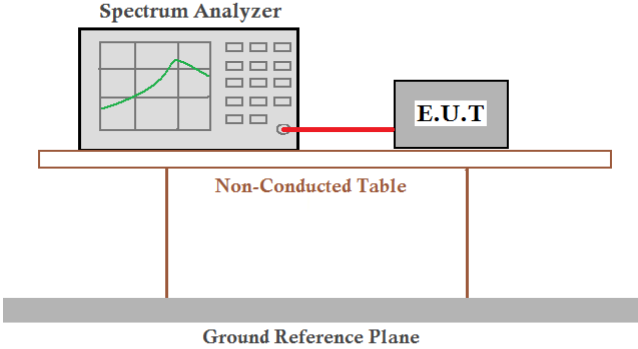Test Requirement:	FCC Part 15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013 and KDB 558074
Receiver setup:	RBW=100 kHz, VBW=300 kHz, Frequency range=2400MHz-2483.5MHz, Detector=Peak
Limit:	15 channels
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.</p>
Test Instruments:	Refer to section 5.8 for details
Test mode:	Hopping mode
Test results:	Pass


Measurement Data:

Mode	Hopping channel numbers	Limit	Result
GFSK, $\pi/4$ -DQPSK, 8DPSK	79	15	Pass

Test plot as follows:

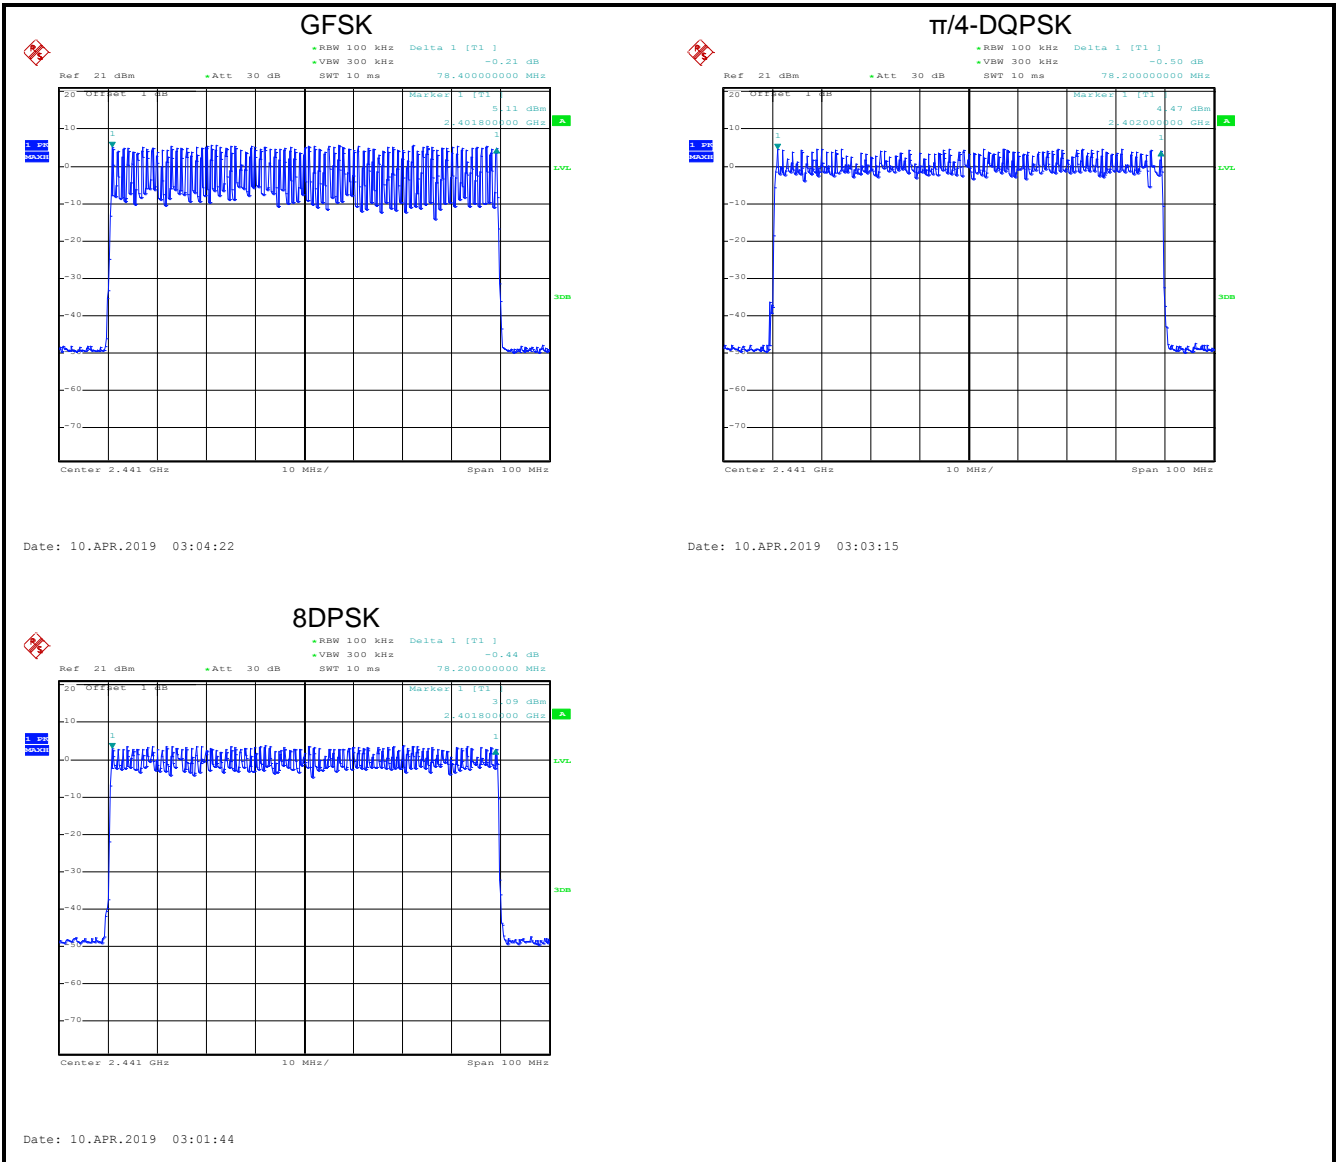

6.7 Dwell Time

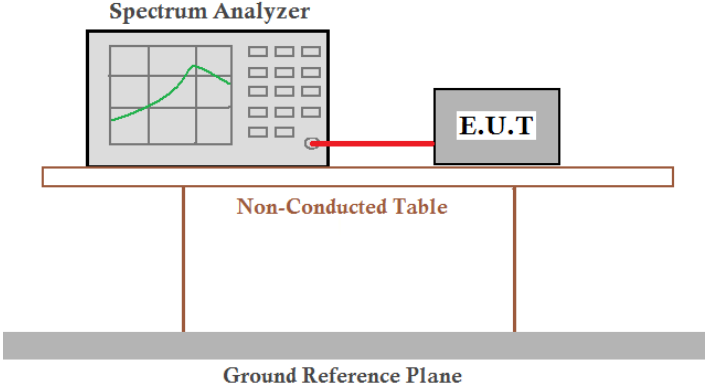Test Requirement:	FCC Part 15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013 and KDB 558074
Receiver setup:	RBW=1 MHz, VBW=1 MHz, Span=0 Hz, Detector=Peak
Limit:	0.4 Second
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.</p>
Test Instruments:	Refer to section 5.8 for details
Test mode:	Hopping mode
Test results:	Pass

Measurement Data (Worse case):

Mode	Packet	Dwell time (second)	Limit (second)	Result
GFSK	DH1	0.13056	0.4	Pass
	DH3	0.26784		
	DH5	0.31317		
π/4-DQPSK	2-DH1	0.13312	0.4	Pass
	2-DH3	0.26880		
	2-DH5	0.31403		
8DPSK	3-DH1	0.11328	0.4	Pass
	3-DH3	0.26880		
	3-DH5	0.31317		

Note:

The test period = 0.4 Second/Channel x 79 Channel = 31.6 s

Calculation Formula: Dwell time = Ton time per hop * Hopping numbers * Period


For example:

DH1 time slot = $0.416 * (1600 / (2 * 79)) * 31.6 = 133.12\text{ms}$


DH3 time slot = $1.686 * (1600 / (4 * 79)) * 31.6 = 269.76\text{ms}$

DH5 time slot = $2.952 * (1600 / (6 * 79)) * 31.6 = 314.88\text{ms}$

Test plot as follows:

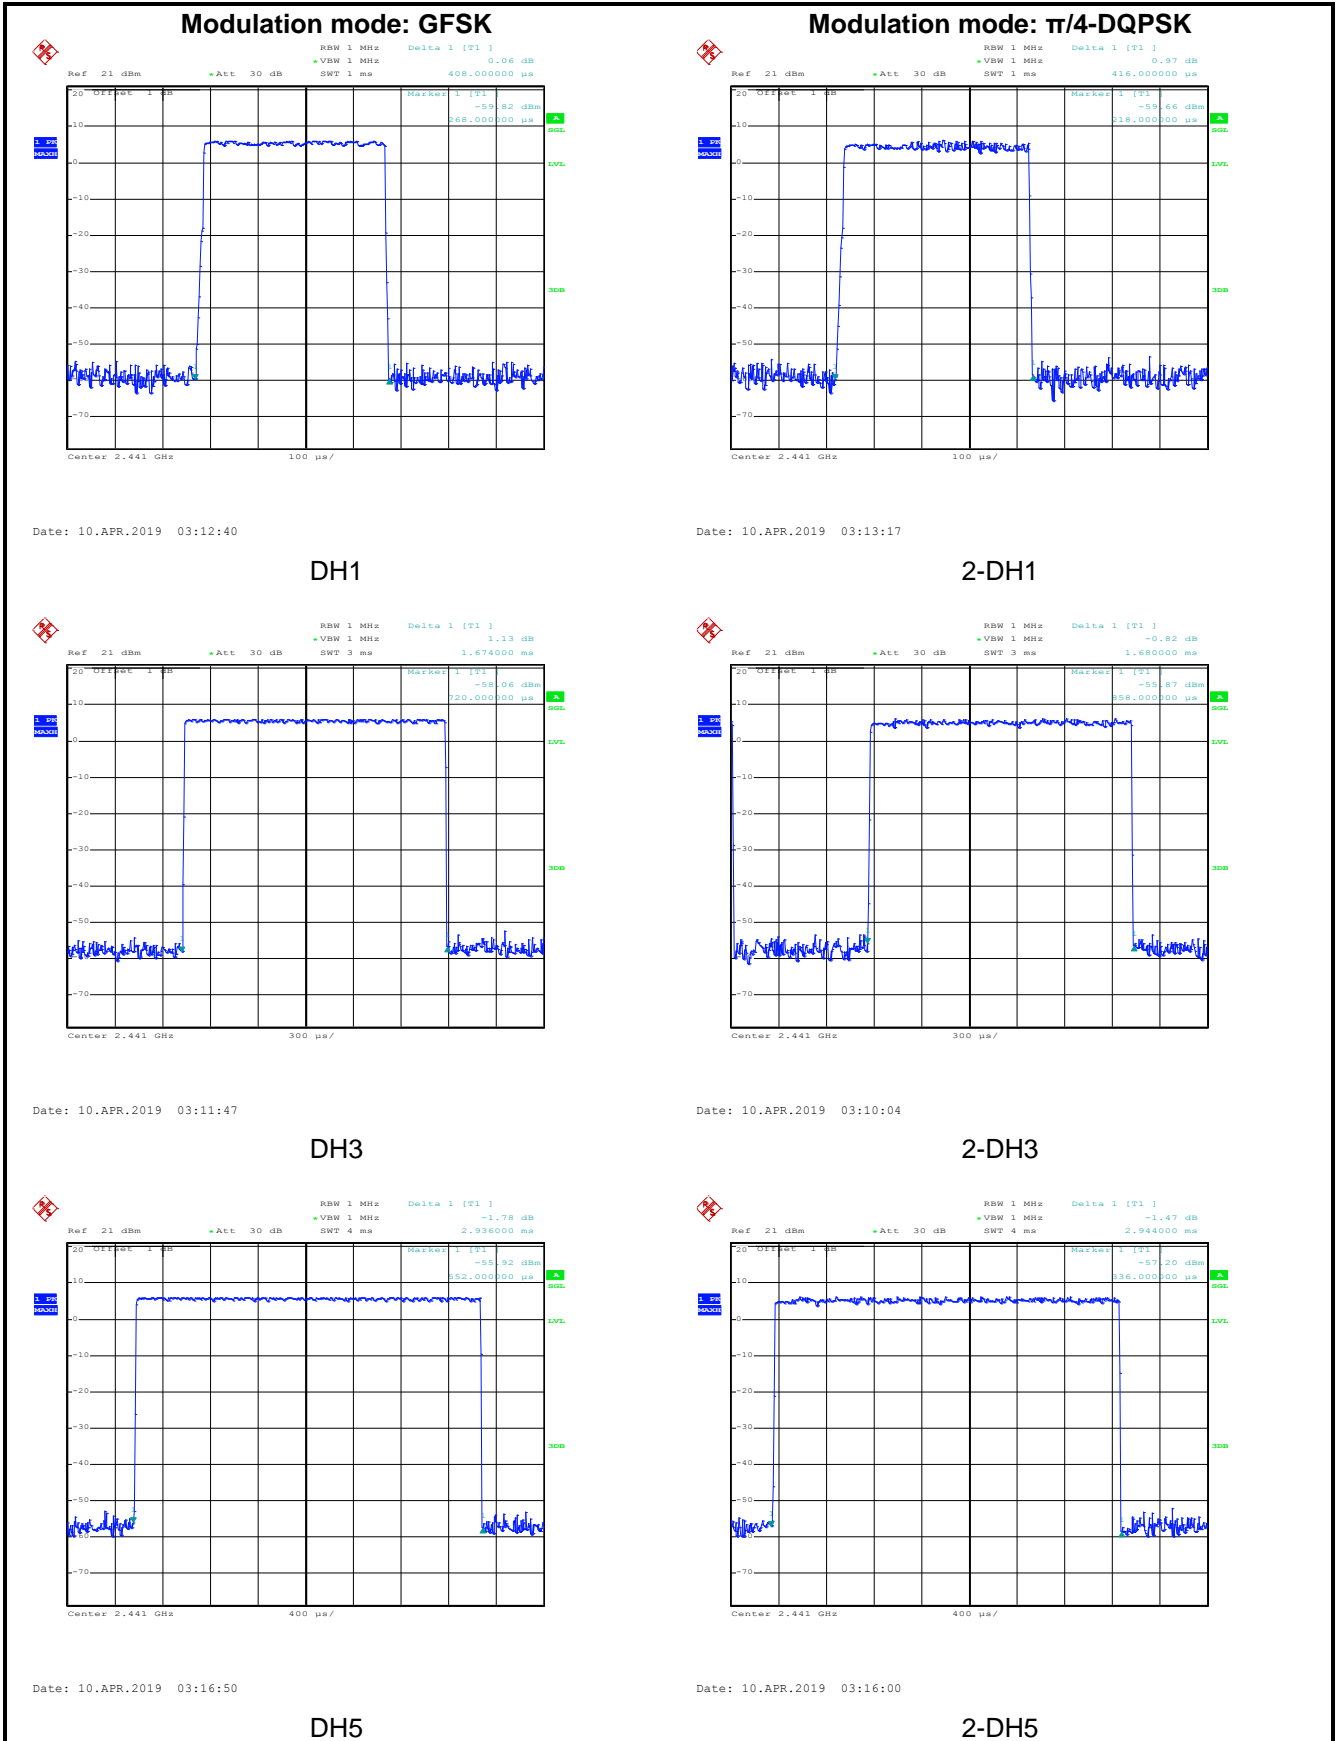


Modulation mode: 8DPSK

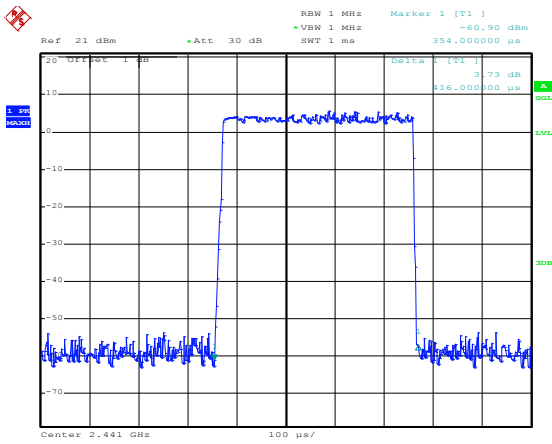


Date: 10.APR.2019 03:14:15

3-DH1

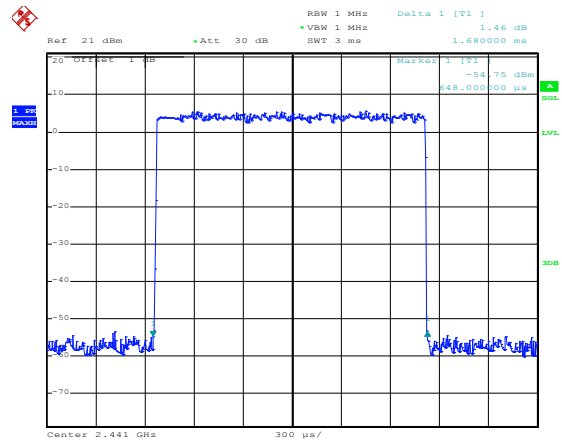

Date: 10.APR.2019 03:10:53



3-DH3

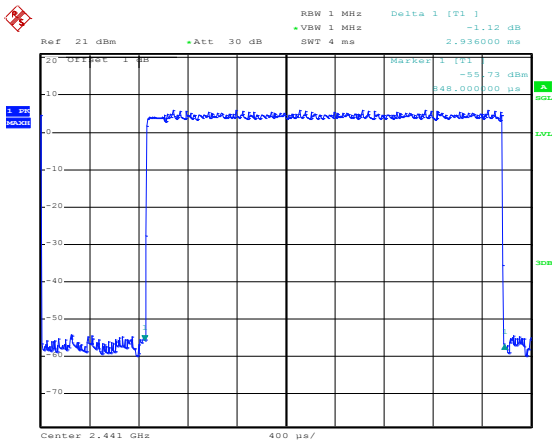

Date: 10.APR.2019 03:15:17


3-DH5

6.8 Pseudorandom Frequency Hopping Sequence

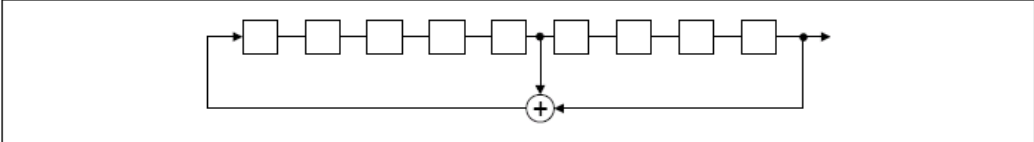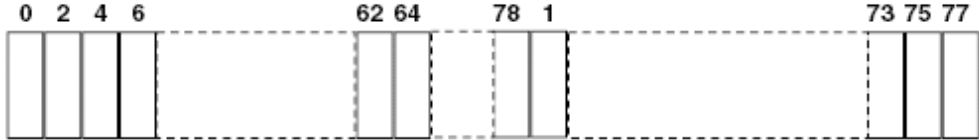
Test Requirement:	FCC Part 15 C Section 15.247 (a)(1) requirement:
<p>Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.</p> <p>Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.</p>	
EUT Pseudorandom Frequency Hopping Sequence	
<p>The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.</p> <ul style="list-style-type: none"> • Number of shift register stages: 9 • Length of pseudo-random sequence: $2^9 - 1 = 511$ bits • Longest sequence of zeros: 8 (non-inverted signal) 	
	
<p><i>Linear Feedback Shift Register for Generation of the PRBS sequence</i></p>	
<p>An example of Pseudorandom Frequency Hopping Sequence as follow:</p>	
	
<p>Each frequency used equally on the average by each transmitter.</p> <p>The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.</p>	

6.9 Band Edge


6.9.1 Conducted Emission Method

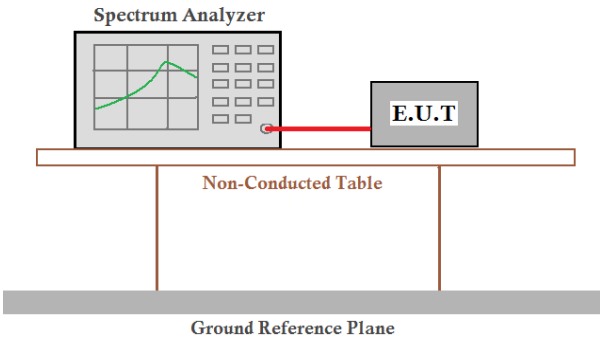Test Requirement:	FCC Part 15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2013 and KDB 558074
Receiver setup:	RBW=100 kHz, VBW=300 kHz, Detector=Peak
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by a Ground Reference Plane.</p>
Test Instruments:	Refer to section 5.8 for details
Test mode:	Non-hopping mode and hopping mode
Test results:	Pass

Test plot as follows:

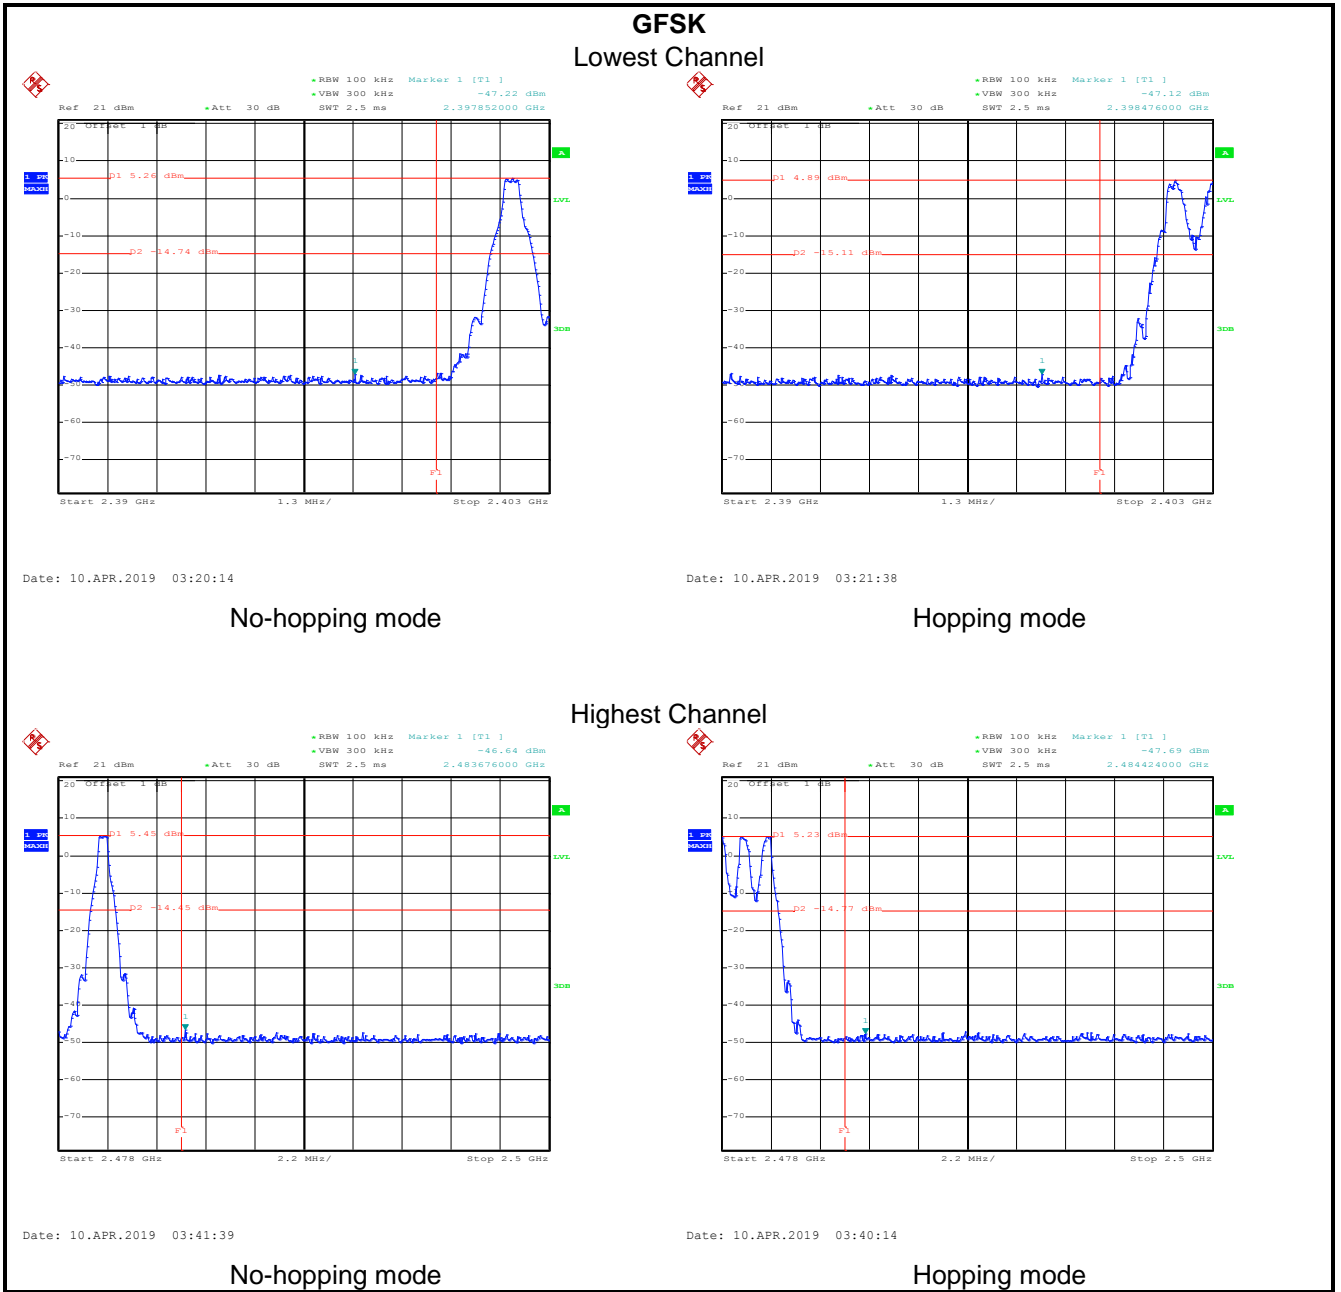


$\pi/4$ -DQPSK Lowest Channel

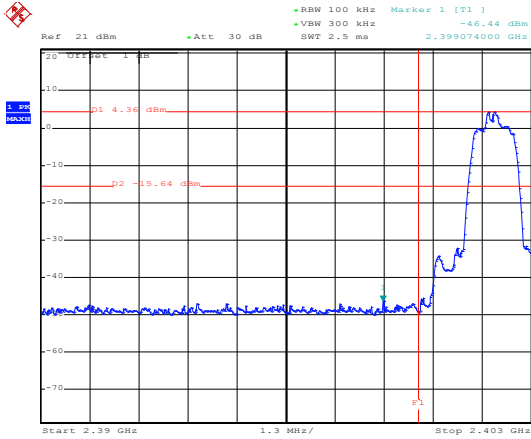

Date: 10.APR.2019 03:26:24


No-hopping mode

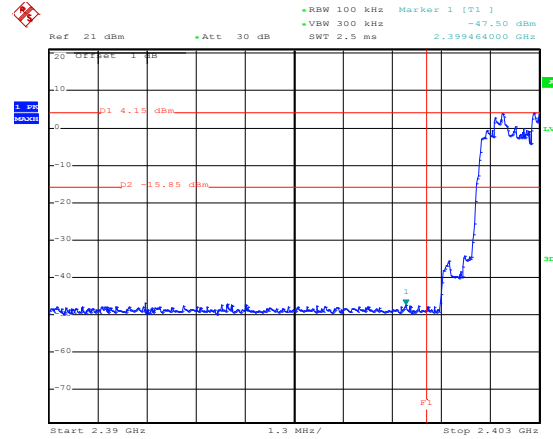

Date: 10.APR.2019 03:25:00


Hopping mode

Highest Channel

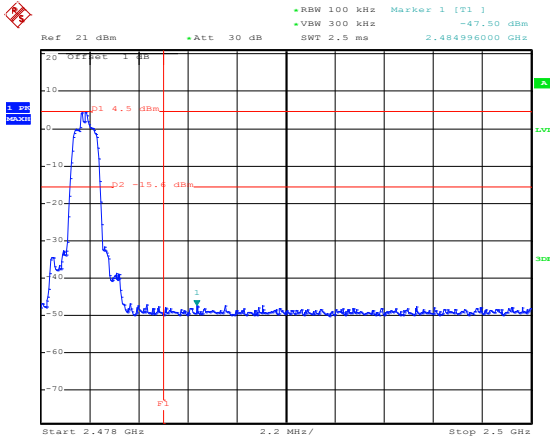

Date: 10.APR.2019 03:35:53


No-hopping mode

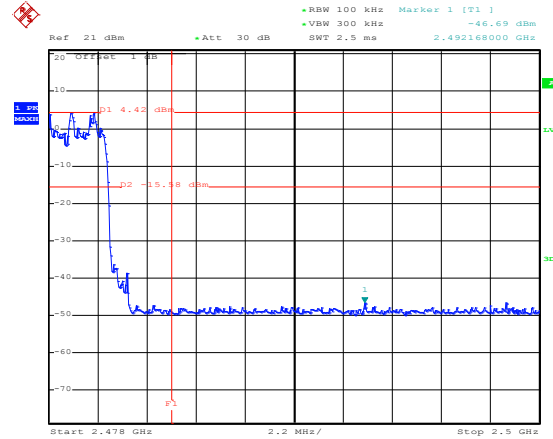

Date: 10.APR.2019 03:38:26


Hopping mode

8DPSK Lowest Channel

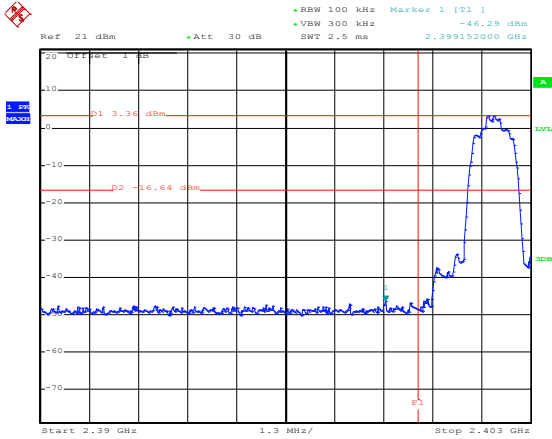

Date: 10.APR.2019 03:27:55


No-hopping mode

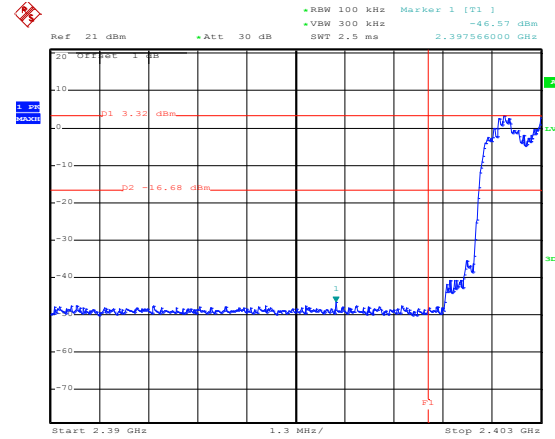

Date: 10.APR.2019 03:29:28


Hopping mode

Highest Channel

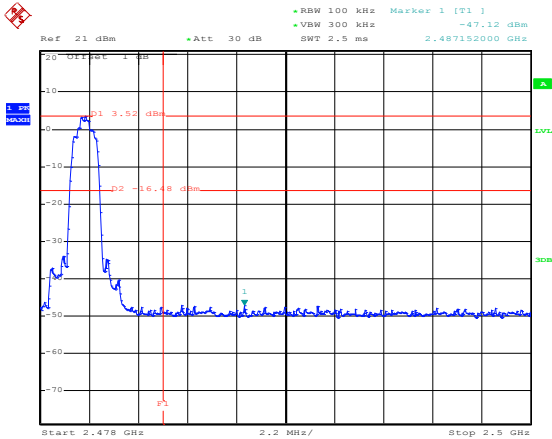

Date: 10.APR.2019 03:34:20

No-hopping mode

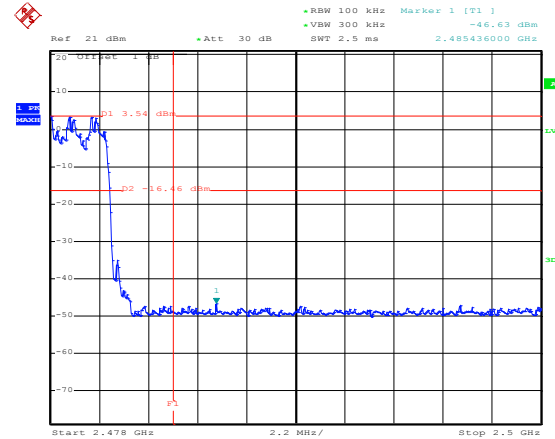

Date: 10.APR.2019 03:32:25

Hopping mode


6.9.2 Radiated Emission Method

Test Requirement:	FCC Part 15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10: 2013				
Test Frequency Range:	2.3GHz to 2.5GHz				
Test Distance:	3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		RMS	1MHz	3MHz	Average Value
Limit:	Frequency	Limit (dBuV/m @3m)		Remark	
	Above 1GHz	54.00		Average Value	
		74.00		Peak Value	
Test setup:					
Test Procedure:	<ol style="list-style-type: none"> 1. The EUT was placed on the top of a rotating table 1.5meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. 				
Test Instruments:	Refer to section 5.8 for details				
Test mode:	Non-hopping mode				
Test results:	Passed				

External ANT A:

GFSK Mode:

Product Name:	Broadband Digital Transmission System	Product Model:	BLUE BEAN A
Test By:	Mike	Test mode:	DH1 Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Humi: 57%

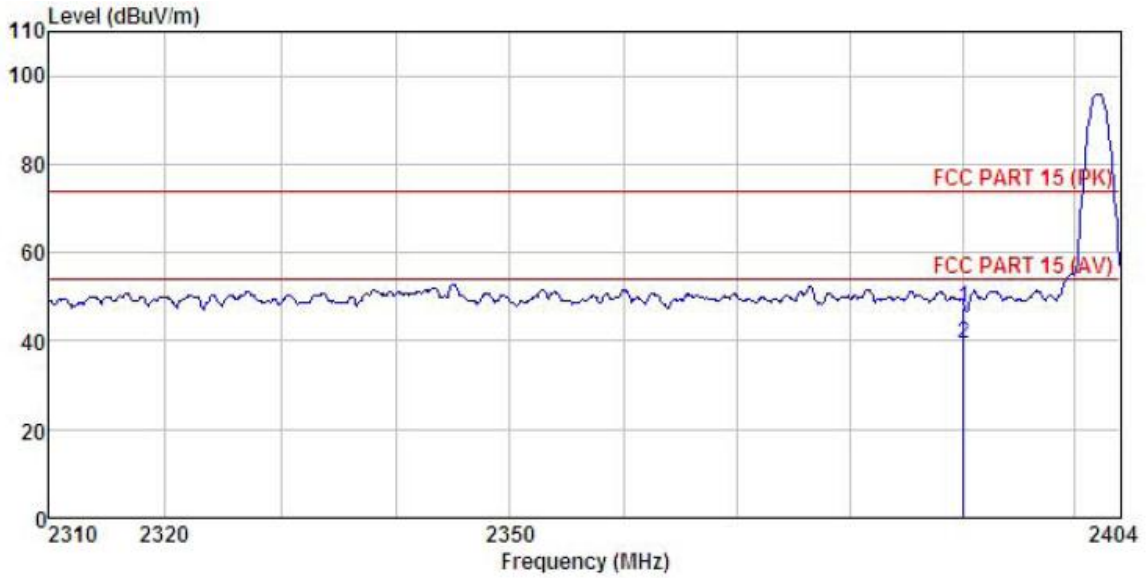


	Read Freq	Antenna Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	15.93	27.07	4.69	0.00	47.69	74.00	-26.31	Peak
2	2390.000	7.62	27.07	4.69	0.00	39.38	54.00	-14.62	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	Broadband Digital Transmission System	Product Model:	BLUE BEAN A
Test By:	Mike	Test mode:	DH1 Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Humi: 57%

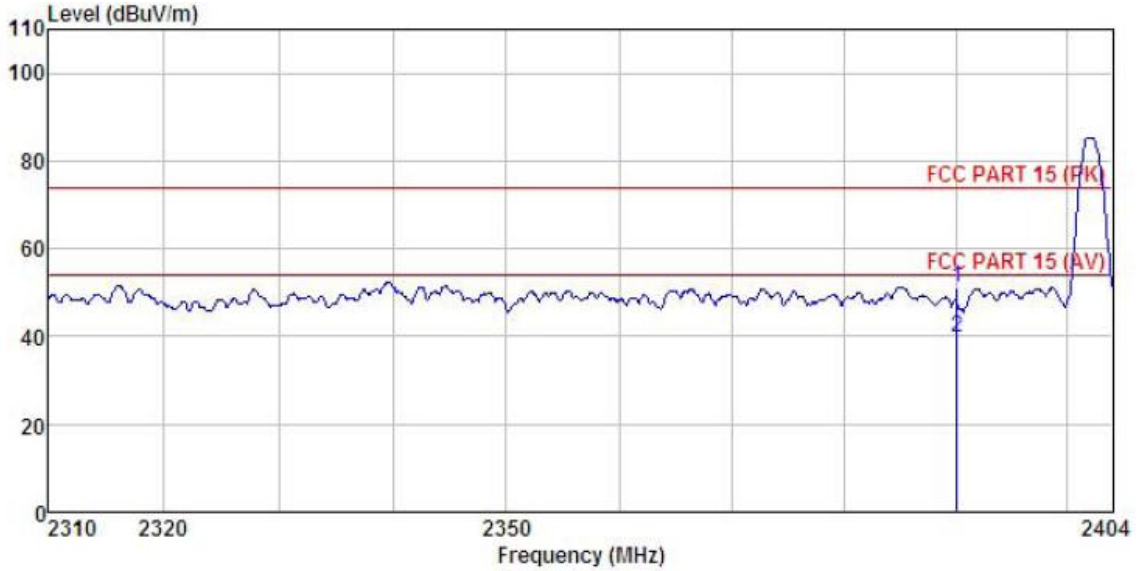


	Read	Antenna	Cable	Preamp	Limit	Over	
Freq	Level	Factor	Loss	Factor	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	2390.000	19.30	27.08	4.69	0.00	51.07	74.00 -22.93 Peak
2	2390.000	8.05	27.08	4.69	0.00	39.82	54.00 -14.18 Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	Broadband Digital Transmission System	Product Model:	BLUE BEAN A
Test By:	Mike	Test mode:	DH1 Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Humi: 57%

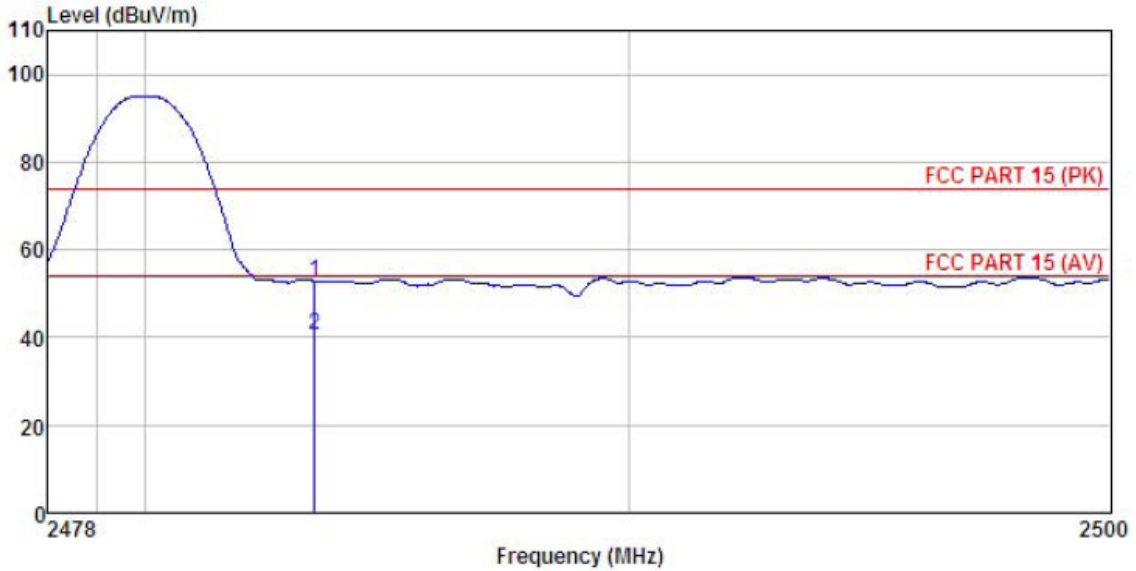


	Read	Antenna	Cable	Preamp	Limit	Over		
Freq	Level	Factor	Loss	Factor	Line	Limit	Remark	
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	20.53	27.36	4.81	0.00	52.70	74.00	-21.30 Peak
2	2483.500	8.45	27.36	4.81	0.00	40.62	54.00	-13.38 Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	Broadband Digital Transmission System	Product Model:	BLUE BEAN A
Test By:	Mike	Test mode:	DH1 Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Huni: 57%

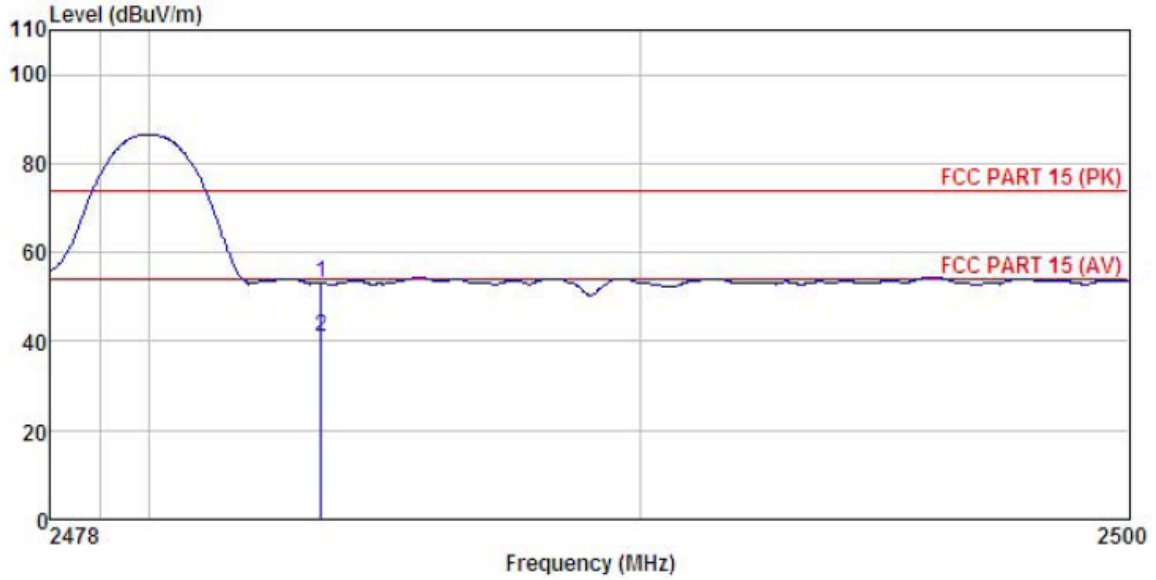


	Read	Antenna	Cable	Preamp	Limit	Over	
Freq	Level	Factor	Loss	Factor	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	2483.500	21.08	27.35	4.81	0.00	53.24	74.00 -20.76 Peak
2	2483.500	8.67	27.35	4.81	0.00	40.83	54.00 -13.17 Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

π/4-DQPSK mode

Product Name:	Broadband Digital Transmission System	Product Model:	BLUE BEAN A
Test By:	Mike	Test mode:	2DH1 Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Humi: 57%

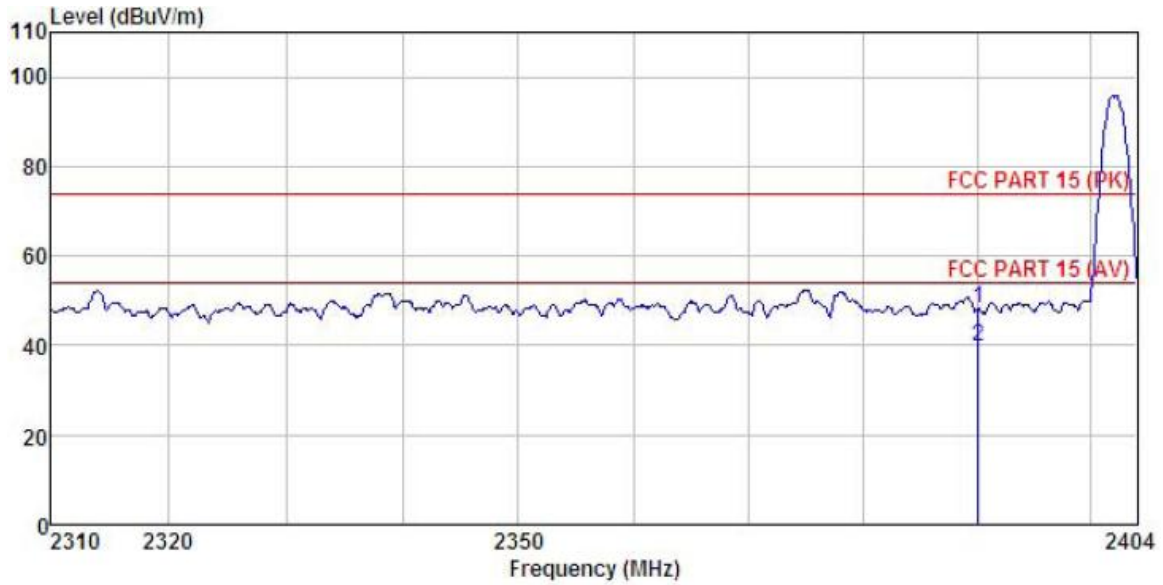


	Read Freq	Antenna Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit	Over	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	16.47	27.08	4.69	0.00	48.24	74.00	-25.76	Peak
2	2390.000	7.87	27.08	4.69	0.00	39.64	54.00	-14.36	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	Broadband Digital Transmission System	Product Model:	BLUE BEAN A
Test By:	Mike	Test mode:	2DH1 Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Humi: 57%

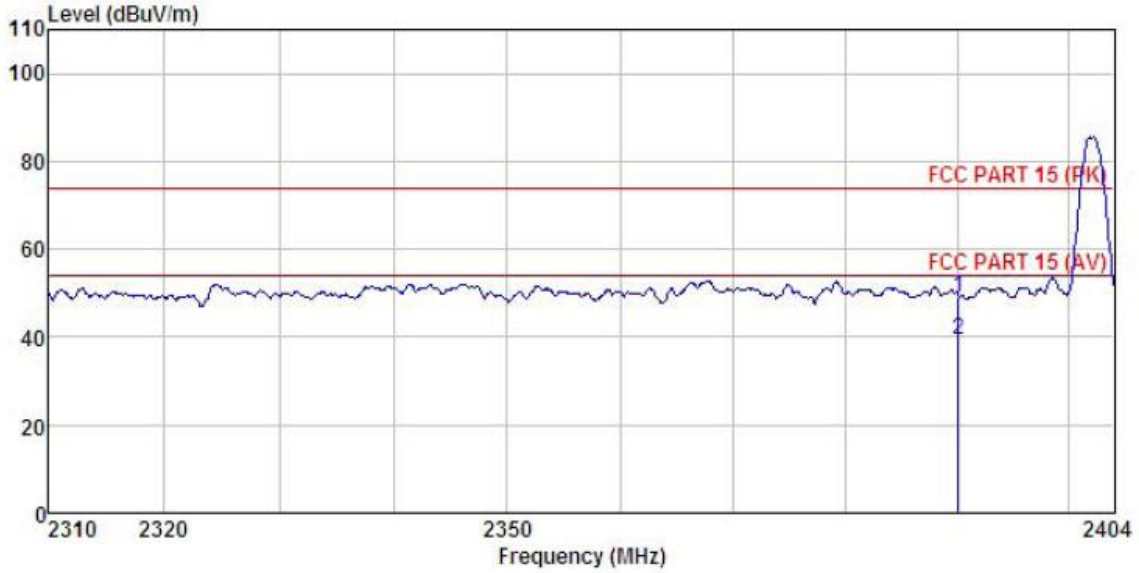


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	17.37	27.08	4.69	0.00	49.14	74.00	-24.86	Peak
2	2390.000	7.60	27.08	4.69	0.00	39.37	54.00	-14.63	Average

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor.
- The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	Broadband Digital Transmission System	Product Model:	BLUE BEAN A
Test By:	Mike	Test mode:	2DH1 Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Humi: 57%

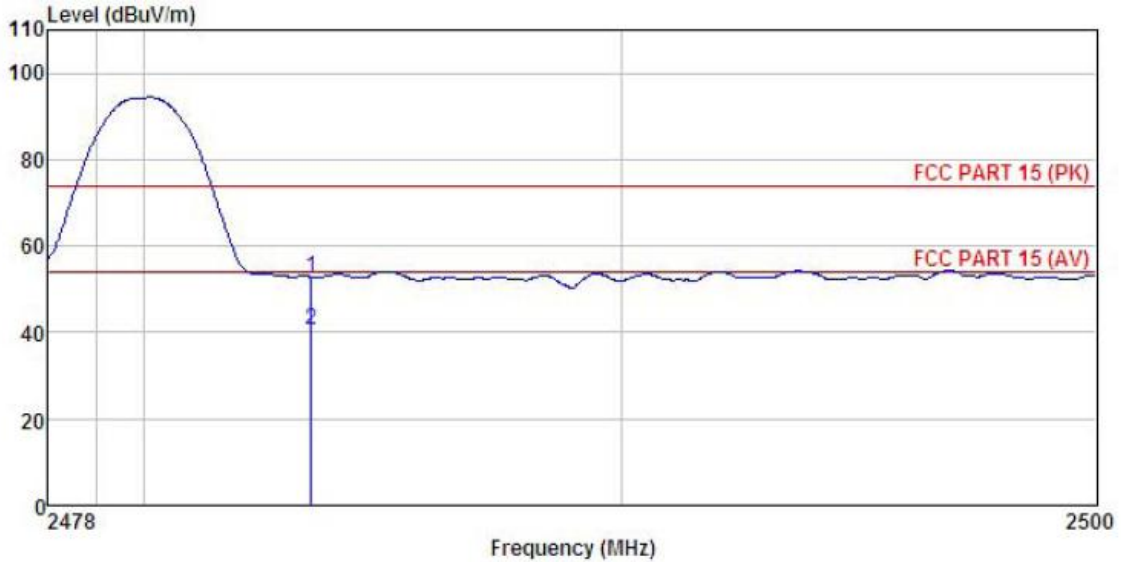


	ReadAntenna	Cable Preamp	Limit	Over					
Freq	Level	Factor	Loss	Factor	Level				
MHz	dBuV	dB/m	dB	dB	dBuV/m				
1	2483.500	20.68	27.36	4.81	0.00	52.85	74.00	-21.15	Peak
2	2483.500	8.51	27.36	4.81	0.00	40.68	54.00	-13.32	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	Broadband Digital Transmission System	Product Model:	BLUE BEAN A
Test By:	Mike	Test mode:	2DH1 Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Humi: 57%

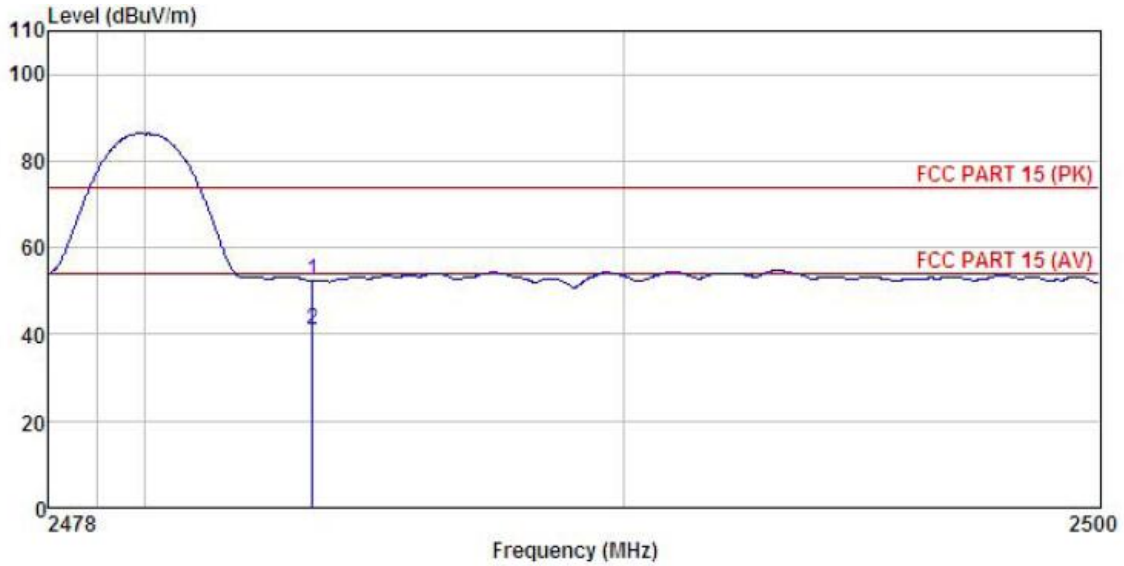


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	20.23	27.35	4.81	0.00	52.39	74.00	-21.61	Peak
2	2483.500	8.64	27.35	4.81	0.00	40.80	54.00	-13.20	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

8DPSK mode

Product Name:	Broadband Digital Transmission System	Product Model:	BLUE BEAN A
Test By:	Mike	Test mode:	3DH1 Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Humi: 57%

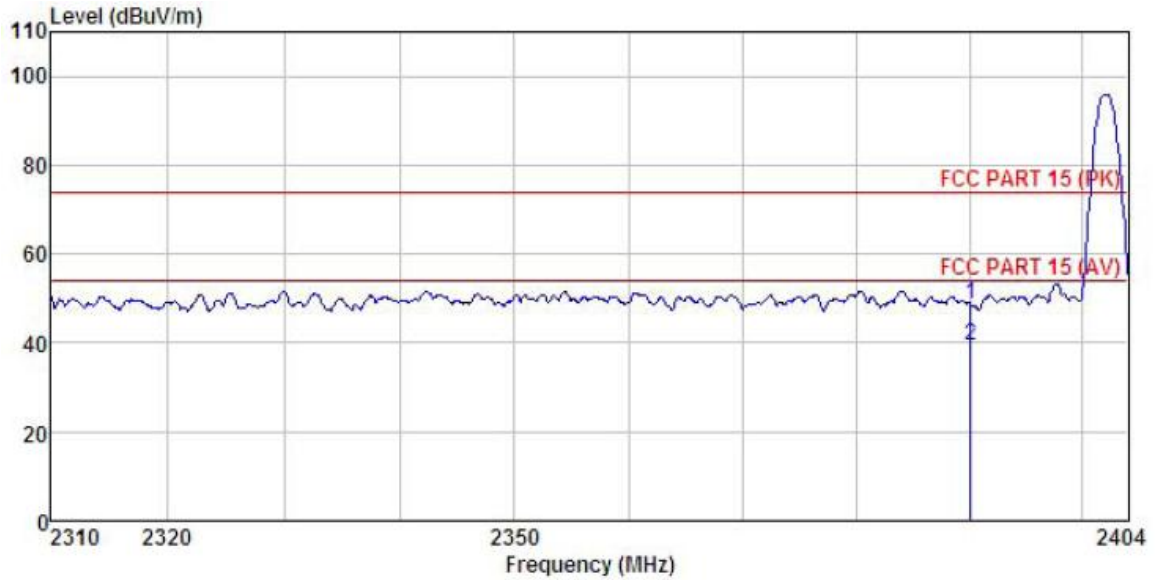


	Read	Antenna	Cable	Preamp	Limit	Over	
Freq	Level	Factor	Loss	Factor	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	2390.000	17.04	27.07	4.69	0.00	48.80	74.00 -25.20 Peak
2	2390.000	7.70	27.07	4.69	0.00	39.46	54.00 -14.54 Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	Broadband Digital Transmission System	Product Model:	BLUE BEAN A
Test By:	Mike	Test mode:	3DH1 Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Humi: 57%

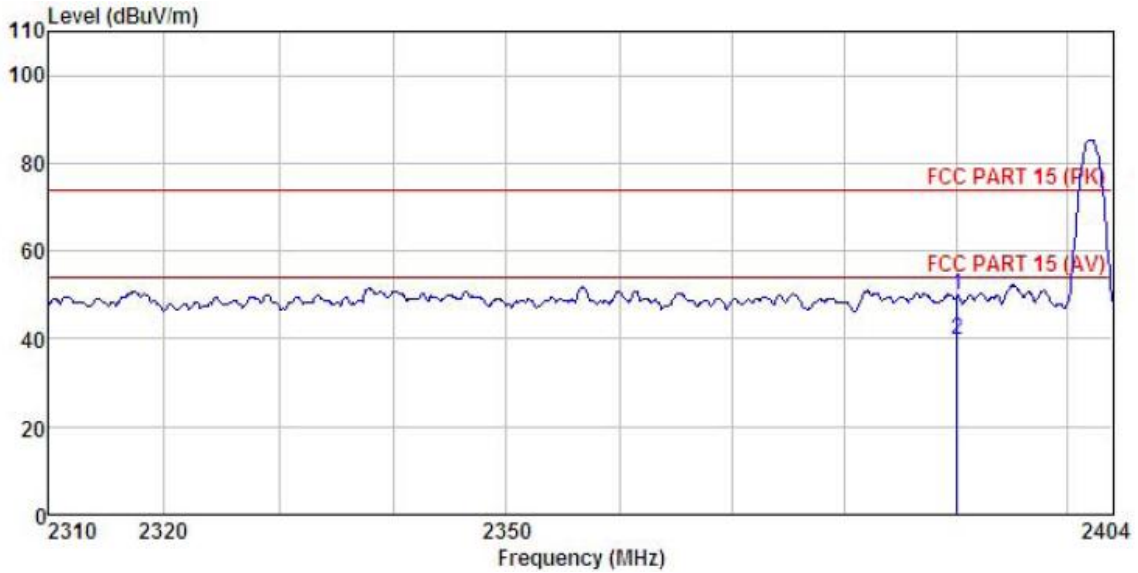


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	18.02	27.08	4.69	0.00	49.79	74.00	-24.21	Peak
2	2390.000	7.91	27.08	4.69	0.00	39.68	54.00	-14.32	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	Broadband Digital Transmission System	Product Model:	BLUE BEAN A
Test By:	Mike	Test mode:	3DH1 Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Humi: 57%

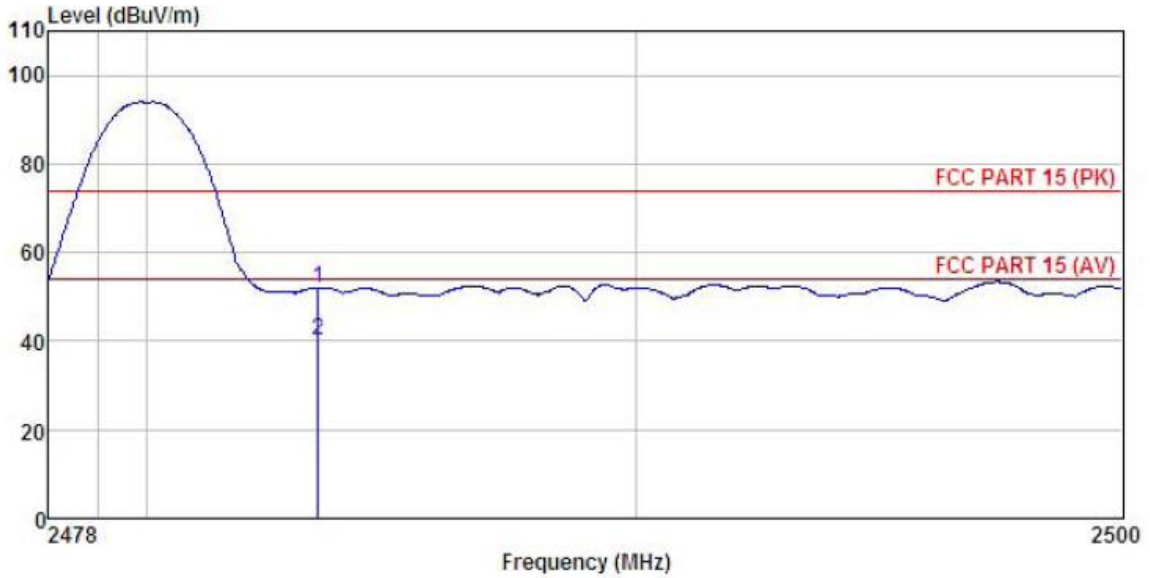


	ReadAntenna	Cable Preamp	Limit	Over					
Freq	Level	Factor	Loss	Factor	Level				
MHz	dBuV	dB/m	dB	dB	dBuV/m				
1	2483.500	19.95	27.36	4.81	0.00	52.12	74.00	-21.88	Peak
2	2483.500	8.12	27.36	4.81	0.00	40.29	54.00	-13.71	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	Broadband Digital Transmission System	Product Model:	BLUE BEAN A
Test By:	Mike	Test mode:	3DH1 Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Humi: 57%

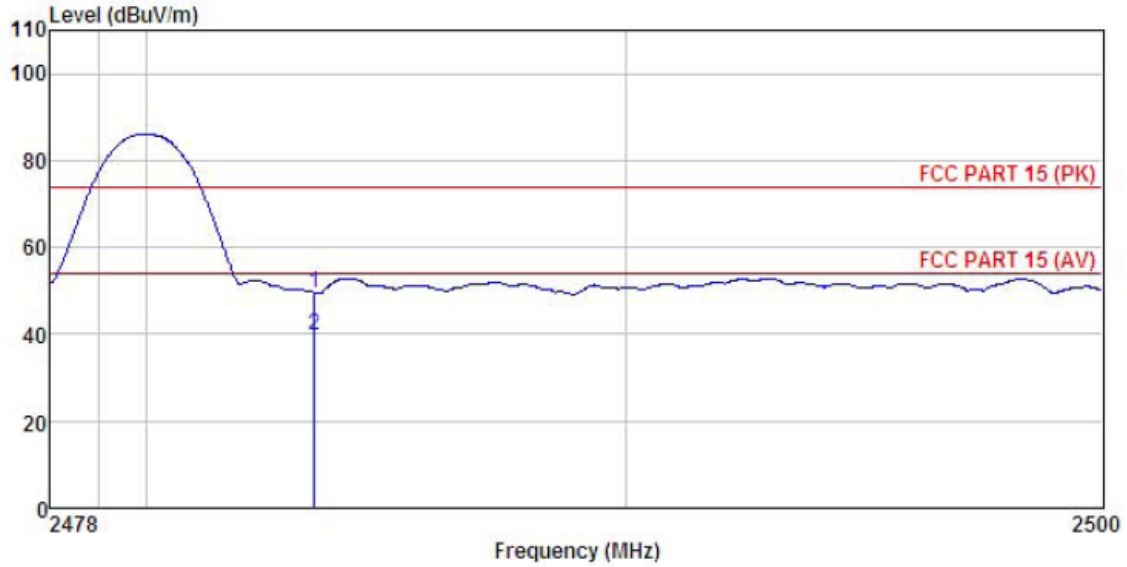

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	17.43	27.35	4.81	0.00	49.59	74.00	-24.41	Peak
2	2483.500	7.76	27.35	4.81	0.00	39.92	54.00	-14.08	Average


Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

External ANT B:

GFSK Mode:

Product Name:	Broadband Digital Transmission System	Product Model:	BLUE BEAN A
Test By:	Mike	Test mode:	DH1 Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Humi: 57%

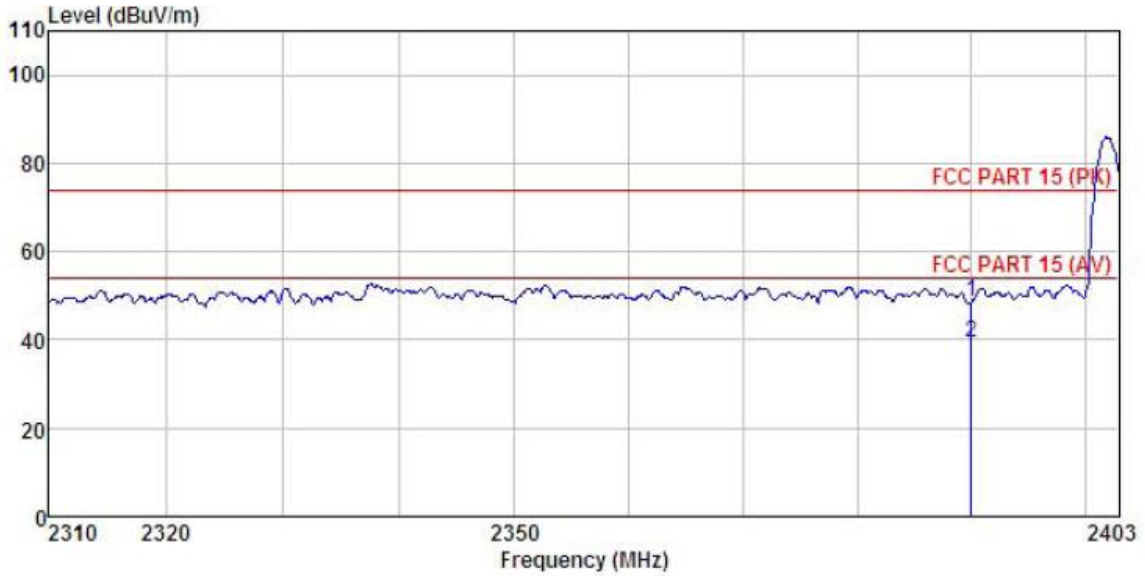


	ReadAntenna	Cable Preamp	Limit	Over				
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	17.12	27.07	4.69	0.00	48.88	74.00	-25.12 Peak
2	2390.000	7.71	27.07	4.69	0.00	39.47	54.00	-14.53 Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	Broadband Digital Transmission System	Product Model:	BLUE BEAN A
Test By:	Mike	Test mode:	DH1 Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Humi: 57%

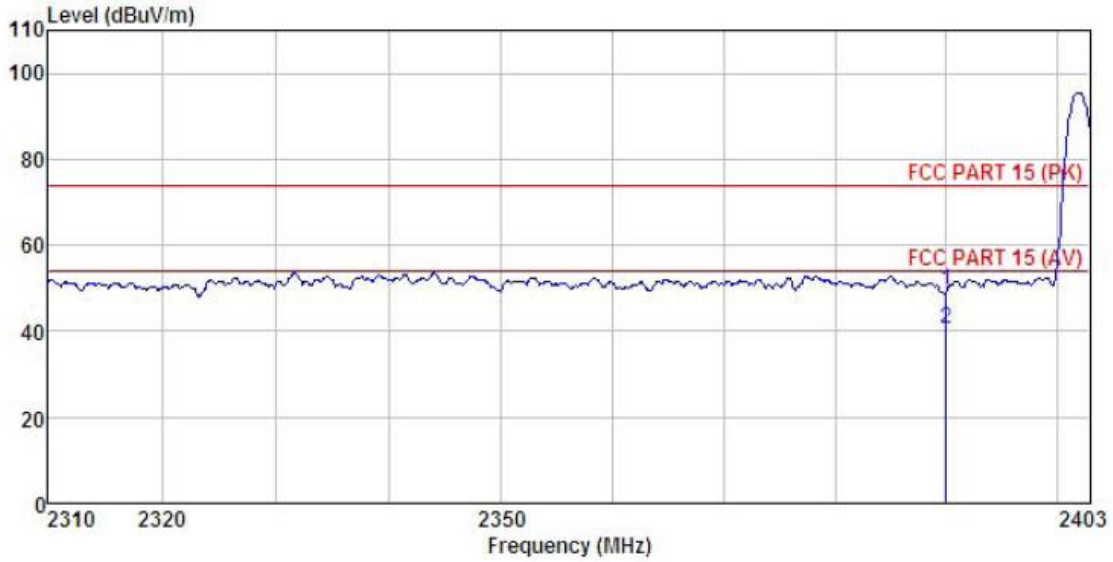


	Read	Antenna	Cable	Preamp	Limit	Over	
Freq	Level	Factor	Loss	Factor	Level	Line	Limit Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	2390.000	17.75	27.08	4.69	0.00	49.52	74.00 -24.48 Peak
2	2390.000	8.62	27.08	4.69	0.00	40.39	54.00 -13.61 Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	Broadband Digital Transmission System	Product Model:	BLUE BEAN A
Test By:	Mike	Test mode:	DH1 Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Huni: 57%

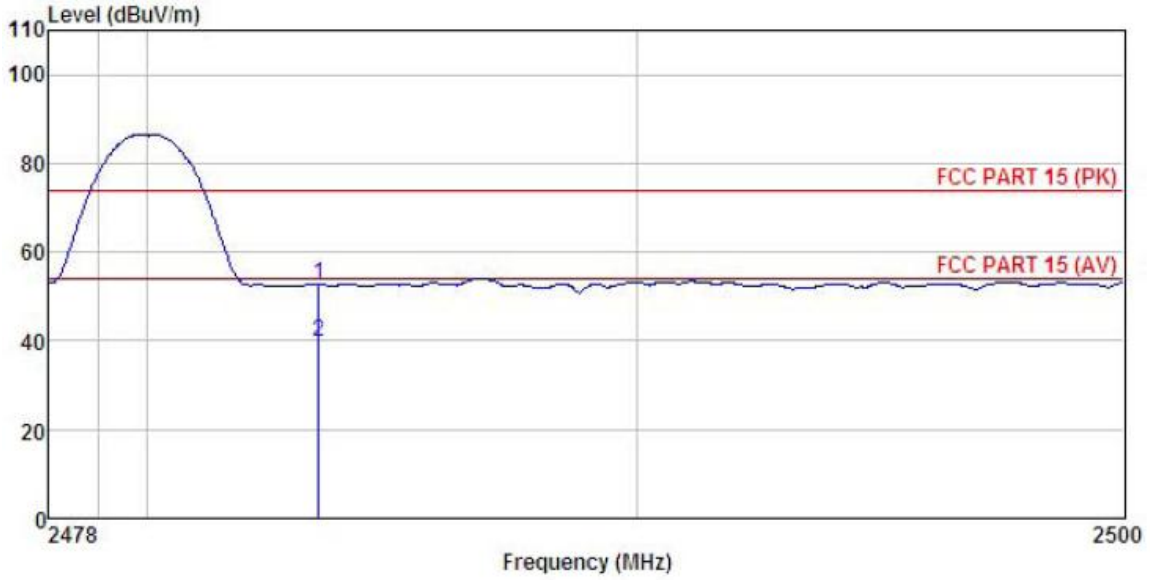


	Read	Antenna	Cable	Preamp	Limit	Over	
Freq	Level	Factor	Loss	Factor	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	2483.500	20.61	27.36	4.81	0.00	52.78	74.00 -21.22 Peak
2	2483.500	7.60	27.36	4.81	0.00	39.77	54.00 -14.23 Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	Broadband Digital Transmission System	Product Model:	BLUE BEAN A
Test By:	Mike	Test mode:	DH1 Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Huni: 57%

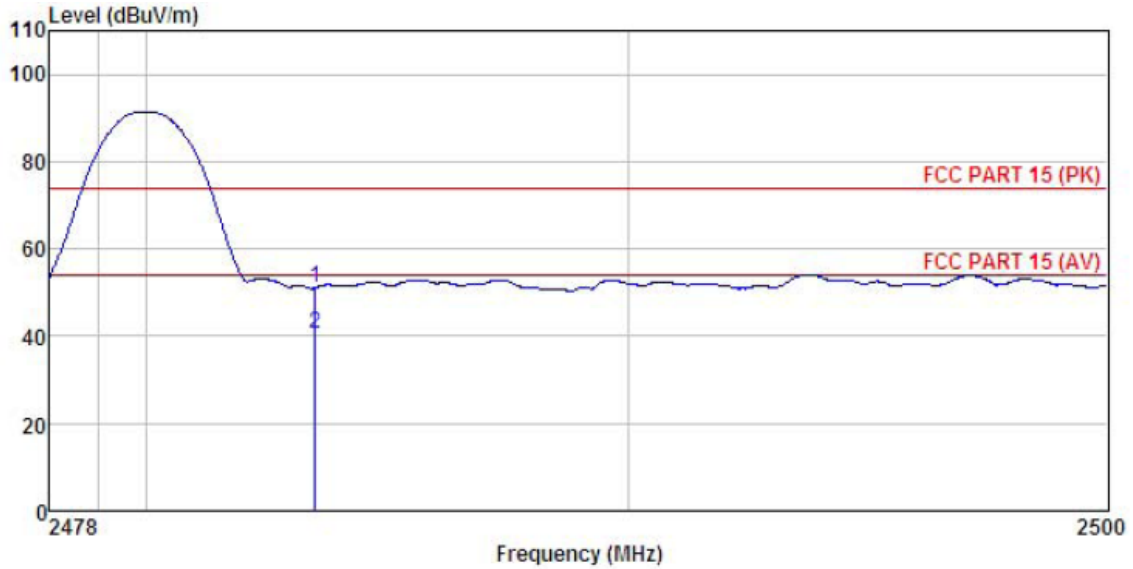


	ReadAntenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
-----	-----	-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	18.99	27.35	4.81	0.00	51.15	74.00	-22.85 Peak
2	2483.500	8.52	27.35	4.81	0.00	40.68	54.00	-13.32 Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

π/4-DQPSK mode

Product Name:	Broadband Digital Transmission System	Product Model:	BLUE BEAN A
Test By:	Mike	Test mode:	2DH1 Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Humi: 57%

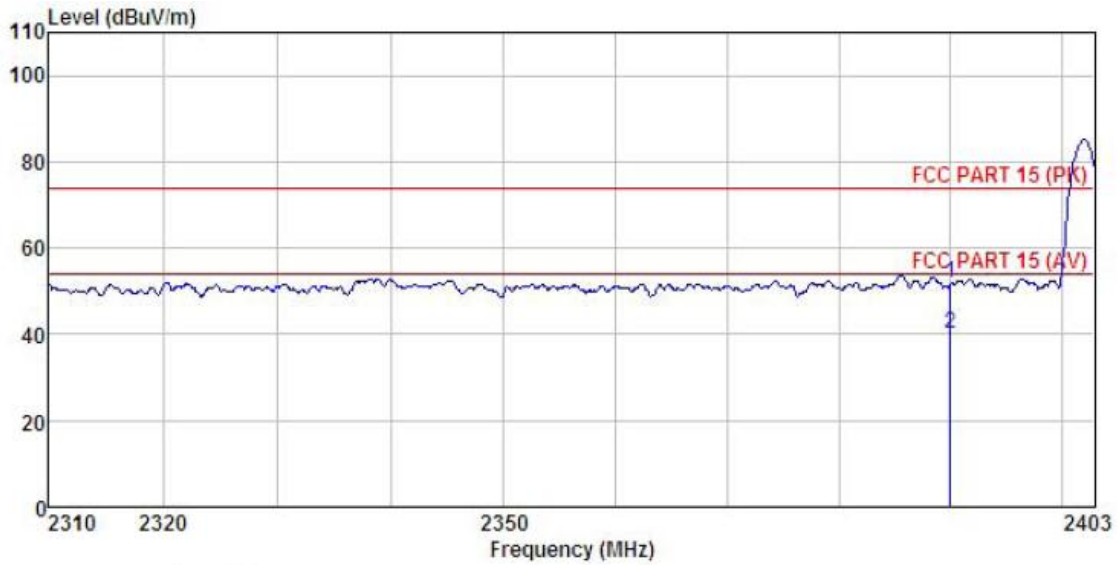


	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	20.08	27.07	4.69	0.00	51.84	74.00	-22.16	Peak
2	8.38	27.07	4.69	0.00	40.14	54.00	-13.86	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	Broadband Digital Transmission System	Product Model:	BLUE BEAN A
Test By:	Mike	Test mode:	2DH1 Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Humi: 57%

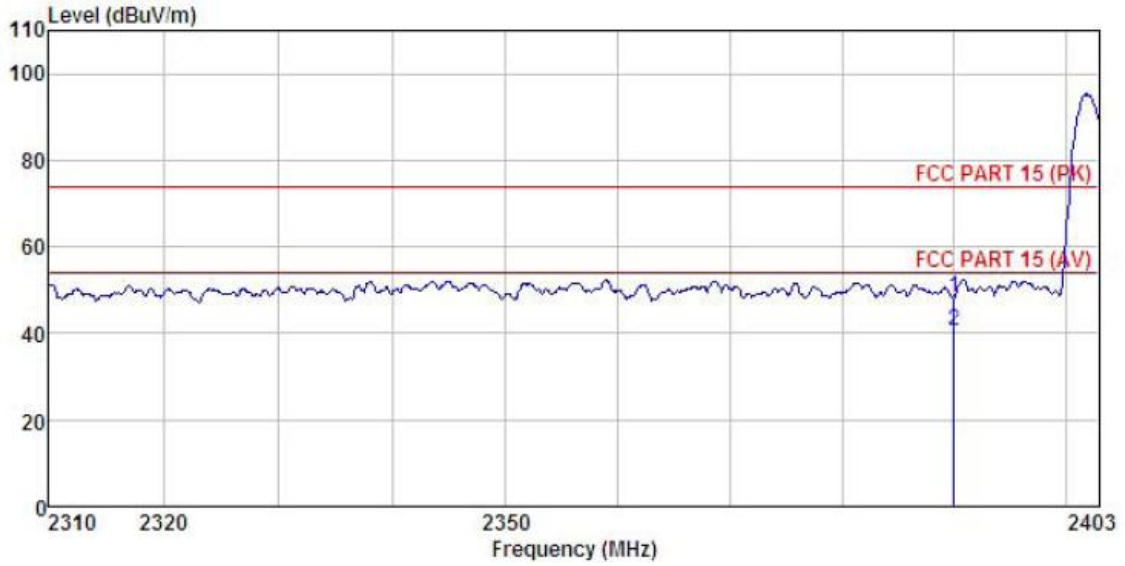


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	16.68	27.08	4.69	0.00	48.45	74.00	-25.55	Peak
2	2390.000	8.79	27.08	4.69	0.00	40.56	54.00	-13.44	Average

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor.
- The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	Broadband Digital Transmission System	Product Model:	BLUE BEAN A
Test By:	Mike	Test mode:	2DH1 Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Humi: 57%

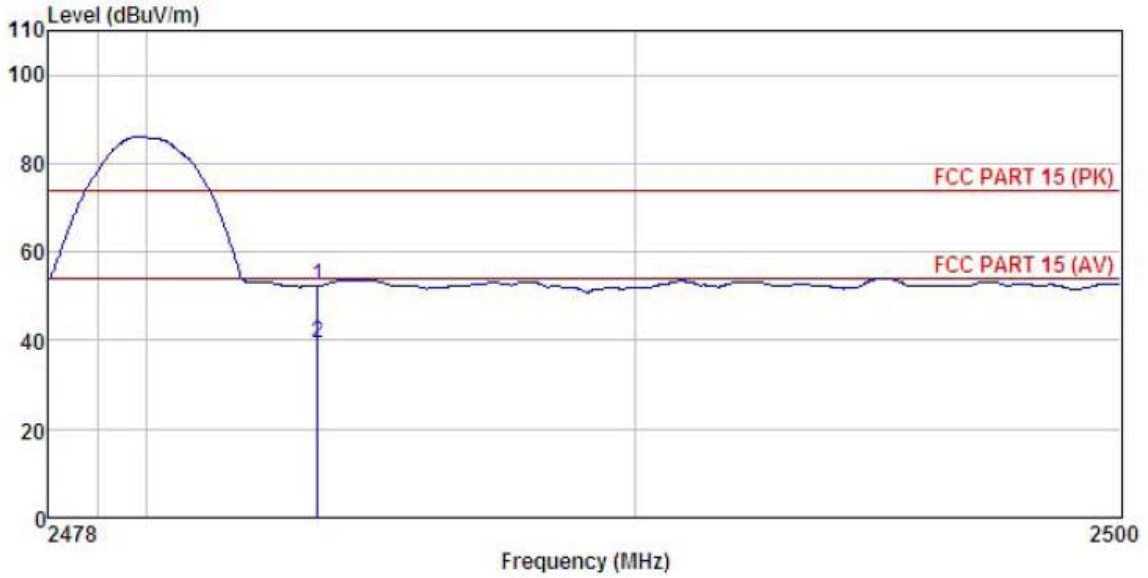


	ReadAntenna	Cable Preamp	Limit	Over					
Freq	Level	Factor	Loss	Factor	Level				
MHz	dBuV	dB/m	dB	dB	dBuV/m				
1	2483.500	20.31	27.36	4.81	0.00	52.48	74.00	-21.52	Peak
2	2483.500	7.38	27.36	4.81	0.00	39.55	54.00	-14.45	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	Broadband Digital Transmission System	Product Model:	BLUE BEAN A
Test By:	Mike	Test mode:	2DH1 Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Humi: 57%

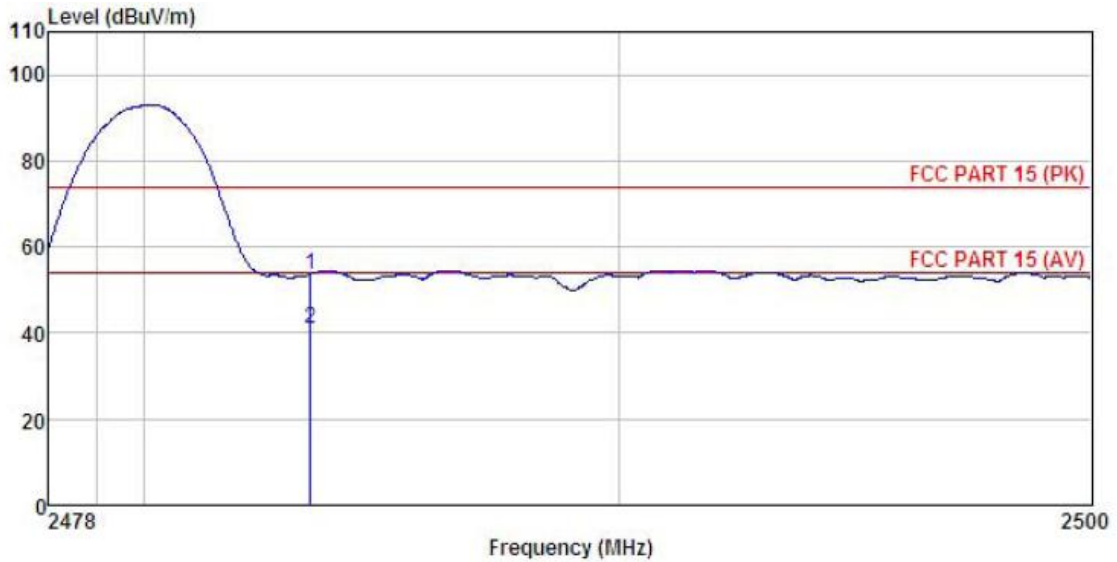


	Freq	ReadAntenna	Cable Preamp	Level	Limit	Over	Remark	
	MHz	Level	Factor	Loss	Factor	Line	Limit	
		dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	
1	2483.500	21.57	27.35	4.81	0.00	53.73	74.00	-20.27 Peak
2	2483.500	8.68	27.35	4.81	0.00	40.84	54.00	-13.16 Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

8DPSK mode

Product Name:	Broadband Digital Transmission System	Product Model:	BLUE BEAN A
Test By:	Mike	Test mode:	3DH1 Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Humi: 57%

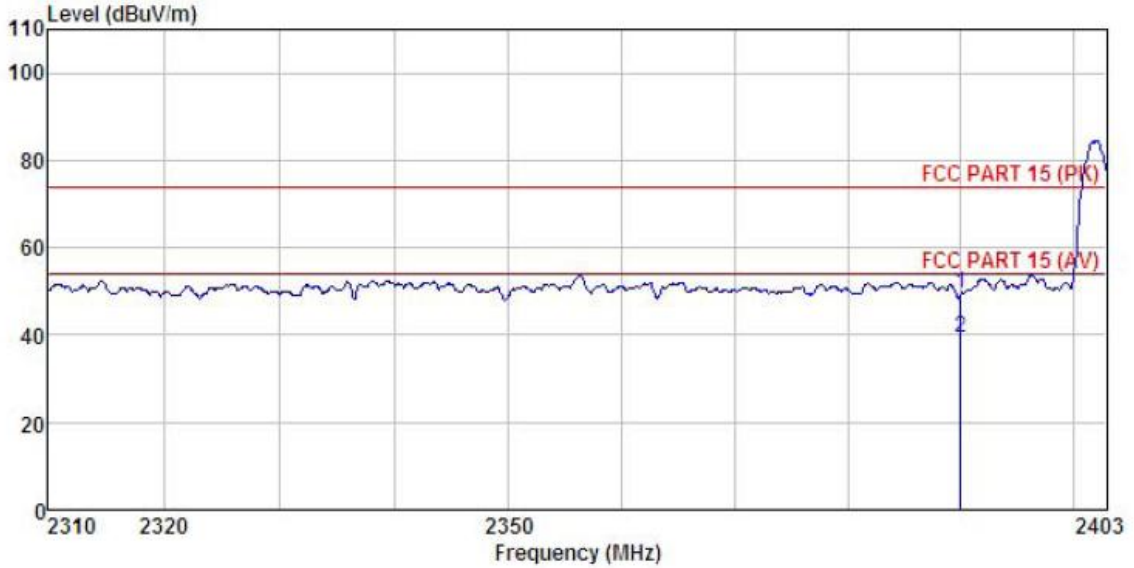


	Read Freq	Antenna Level	Cable Factor	Preamp Loss	Level	Limit	Over	Remark
	MHz	dBuV	dB/m	dB	dBuV/m	dBuV/m	dB	
1	2390.000	17.86	27.07	4.69	0.00	49.62	74.00	-24.38 Peak
2	2390.000	7.62	27.07	4.69	0.00	39.38	54.00	-14.62 Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamp Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	Broadband Digital Transmission System	Product Model:	BLUE BEAN A
Test By:	Mike	Test mode:	3DH1 Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Humi: 57%

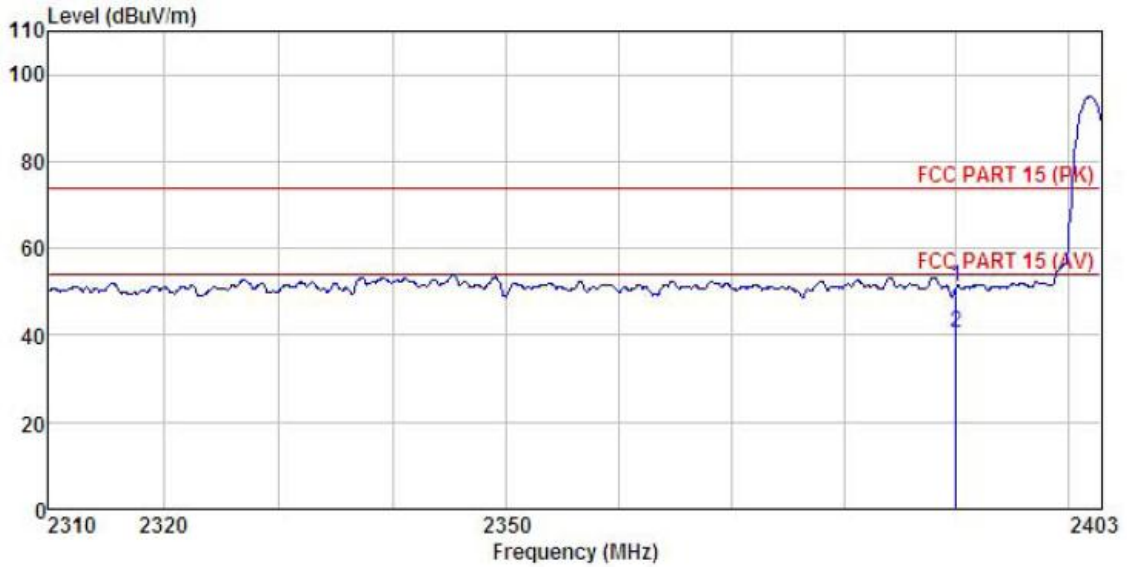


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	19.43	27.08	4.69	0.00	51.20	74.00	-22.80	Peak
2	2390.000	8.77	27.08	4.69	0.00	40.54	54.00	-13.46	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	Broadband Digital Transmission System	Product Model:	BLUE BEAN A
Test By:	Mike	Test mode:	3DH1 Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Humi: 57%

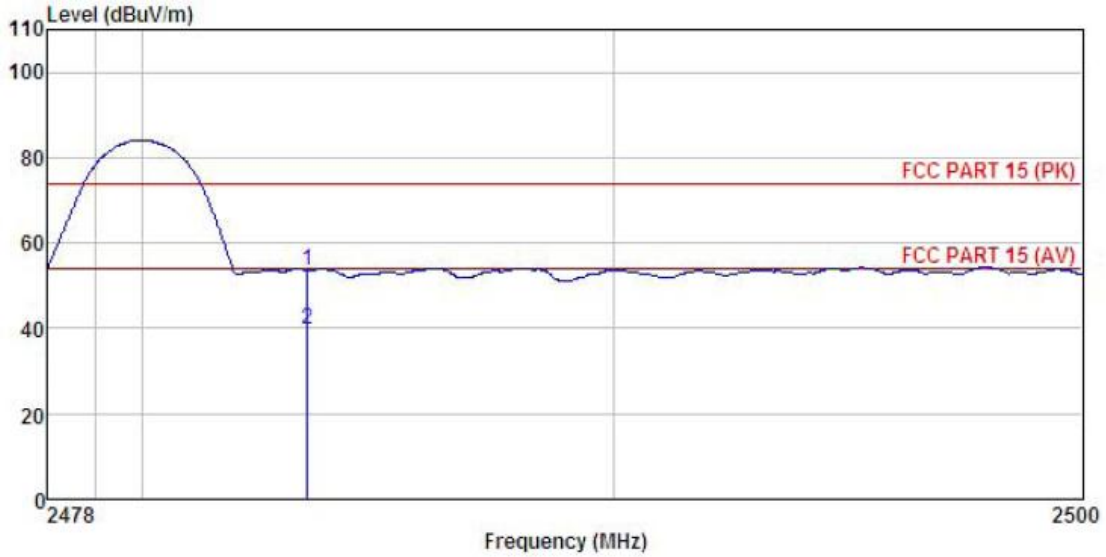


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	21.48	27.36	4.81	0.00	53.65	74.00	-20.35	Peak
2	2483.500	7.80	27.36	4.81	0.00	39.97	54.00	-14.03	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	Broadband Digital Transmission System	Product Model:	BLUE BEAN A
Test By:	Mike	Test mode:	3DH1 Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Huni: 57%

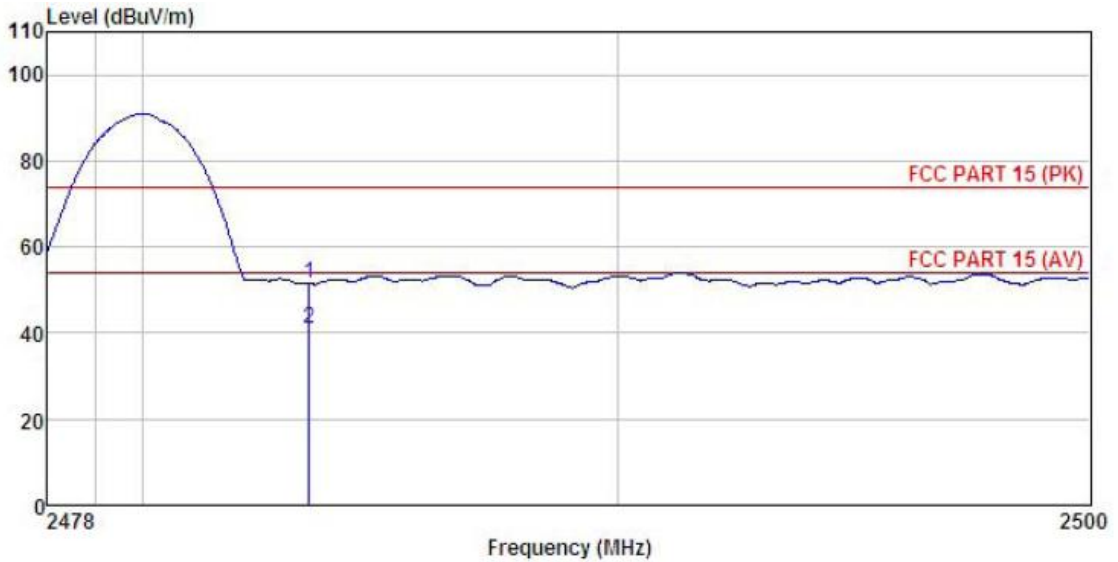

	ReadAntenna	Cable	Preamp	Limit	Over				
Freq	Level	Factor	Loss	Line	Limit	Remark			
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m			
1	2483.500	19.37	27.35	4.81	0.00	51.53	74.00	-22.47	Peak
2	2483.500	8.82	27.35	4.81	0.00	40.98	54.00	-13.02	Average


Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Ceramic ANT:

GFSK Mode:

Product Name:	Broadband Digital Transmission System	Product Model:	BLUE BEAN A
Test By:	Mike	Test mode:	DH1 Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Humi: 57%

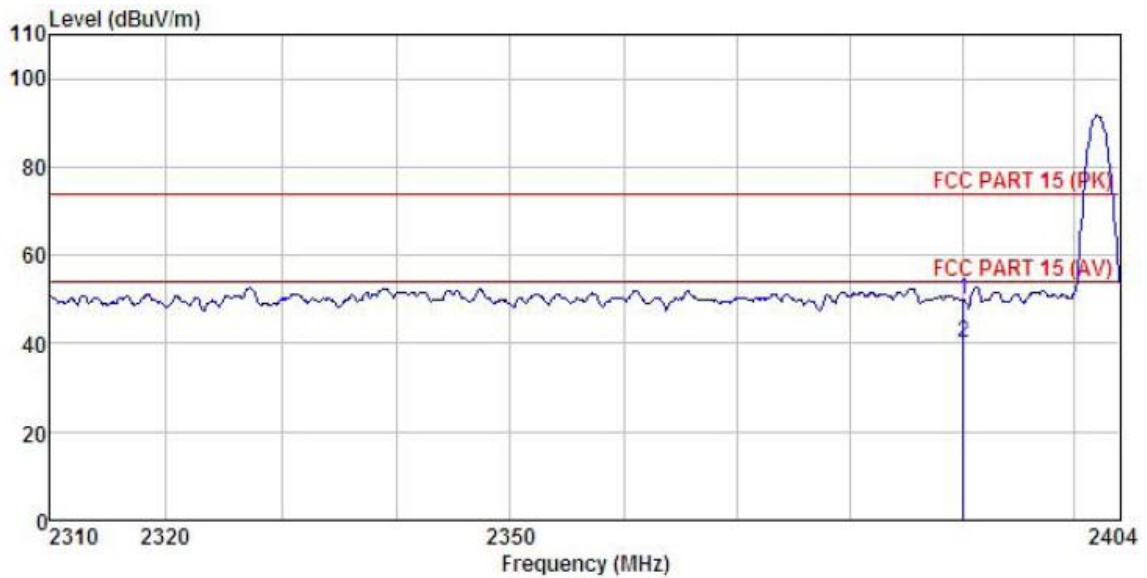


	Read	Antenna	Cable	Preamp	Limit	Over	
Freq	Level	Factor	Loss	Factor	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	2390.000	18.13	27.07	4.69	0.00	49.89	74.00 -24.11 Peak
2	2390.000	8.32	27.07	4.69	0.00	40.08	54.00 -13.92 Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	Broadband Digital Transmission System	Product Model:	BLUE BEAN A
Test By:	Mike	Test mode:	DH1 Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Humi: 57%

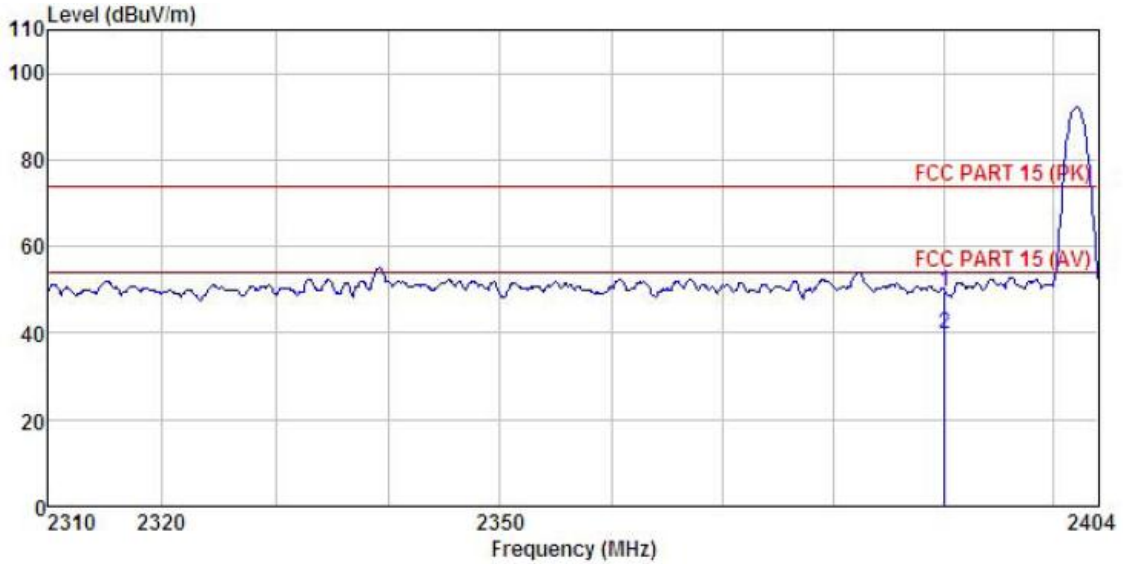


	Read	Antenna	Cable	Preamp	Limit	Over		
Freq	Level	Factor	Loss	Factor	Line	Limit	Remark	
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	17.87	27.08	4.69	0.00	49.64	74.00	-24.36 Peak
2	2390.000	8.12	27.08	4.69	0.00	39.89	54.00	-14.11 Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	Broadband Digital Transmission System	Product Model:	BLUE BEAN A
Test By:	Mike	Test mode:	DH1 Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Humi: 57%

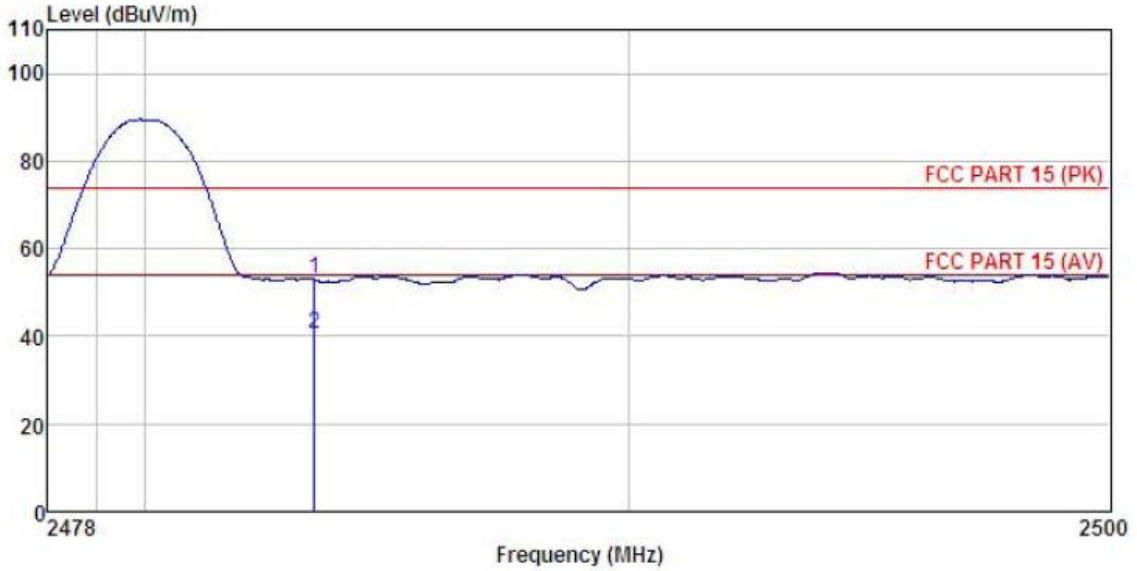


	ReadAntenna	Cable Preamp	Limit	Over				
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
-----	-----	-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	20.82	27.36	4.81	0.00	52.99	74.00	-21.01 Peak
2	2483.500	8.61	27.36	4.81	0.00	40.78	54.00	-13.22 Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	Broadband Digital Transmission System	Product Model:	BLUE BEAN A
Test By:	Mike	Test mode:	DH1 Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Huni: 57%

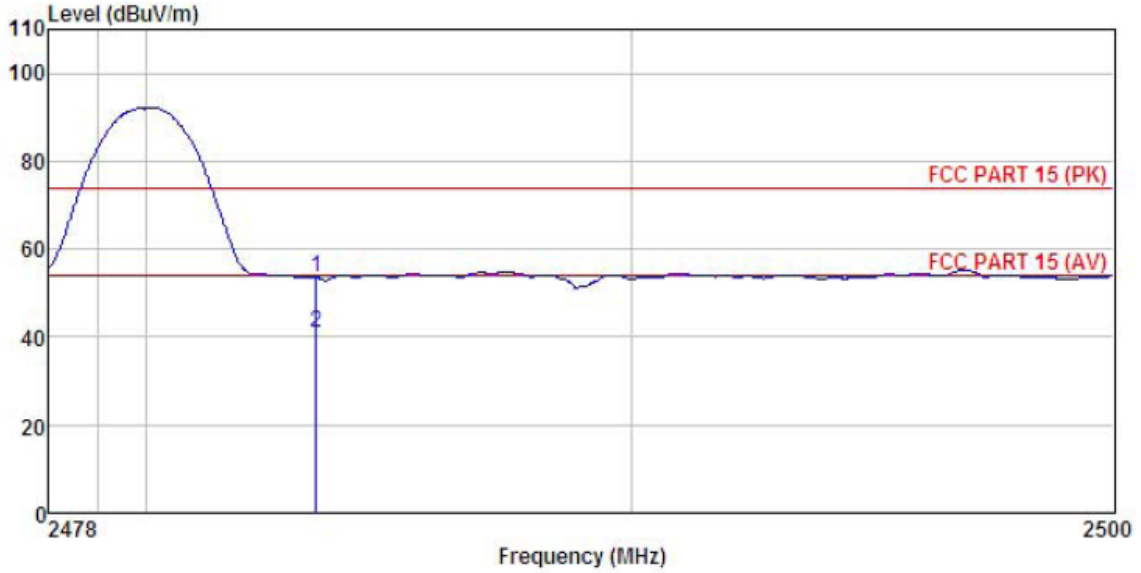


	Read	Antenna	Cable	Preamp	Limit	Over		
Freq	Level	Factor	Loss	Factor	Line	Limit	Remark	
-----	-----	-----	-----	-----	-----	-----	-----	
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	21.36	27.35	4.81	0.00	53.52	74.00	-20.48 Peak
2	2483.500	8.64	27.35	4.81	0.00	40.80	54.00	-13.20 Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

π/4-DQPSK mode

Product Name:	Broadband Digital Transmission System	Product Model:	BLUE BEAN A
Test By:	Mike	Test mode:	2DH1 Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Humi: 57%

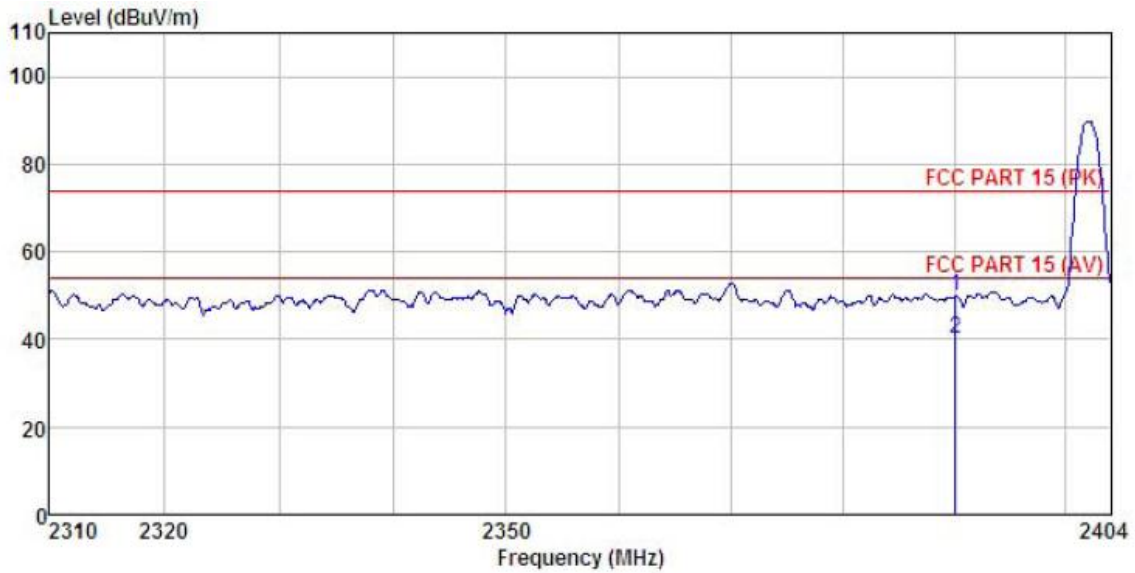


	Read Freq	Antenna Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit	Over	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	18.15	27.07	4.69	0.00	49.91	74.00	-24.09	Peak
2	2390.000	8.23	27.07	4.69	0.00	39.99	54.00	-14.01	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	Broadband Digital Transmission System	Product Model:	BLUE BEAN A
Test By:	Mike	Test mode:	2DH1 Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Humi: 57%

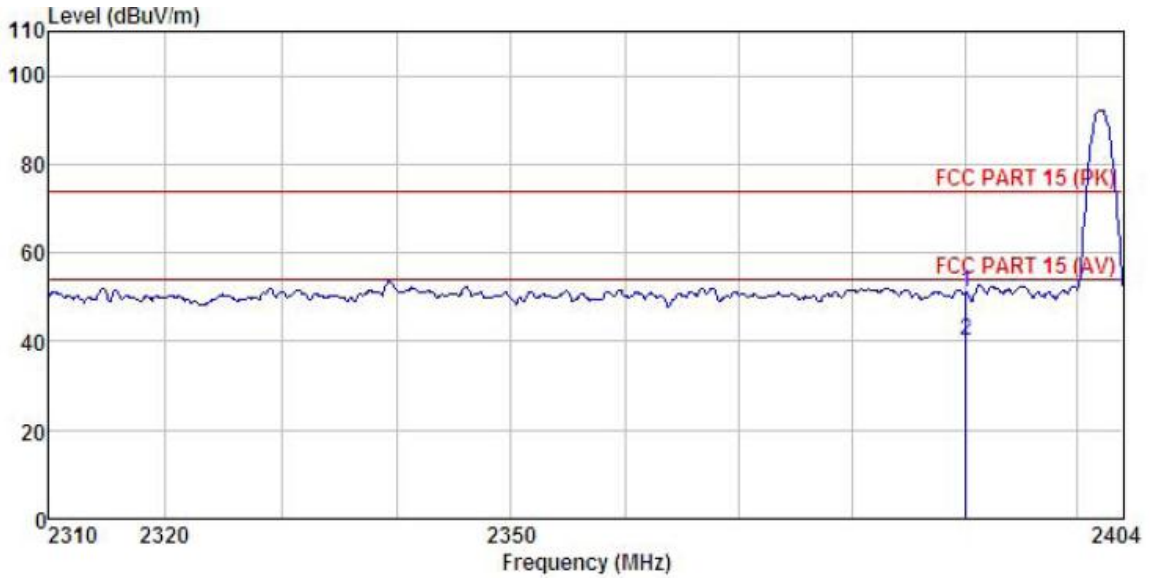


	Freq	ReadAntenna	Cable Preamp	Level	Limit	Over	Remark	
	MHz	Level	Factor	Loss	Factor	Line	Limit	
		dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	
1	2390.000	19.19	27.08	4.69	0.00	50.96	74.00	-23.04 Peak
2	2390.000	8.31	27.08	4.69	0.00	40.08	54.00	-13.92 Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	Broadband Digital Transmission System	Product Model:	BLUE BEAN A
Test By:	Mike	Test mode:	2DH1 Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Humi: 57%

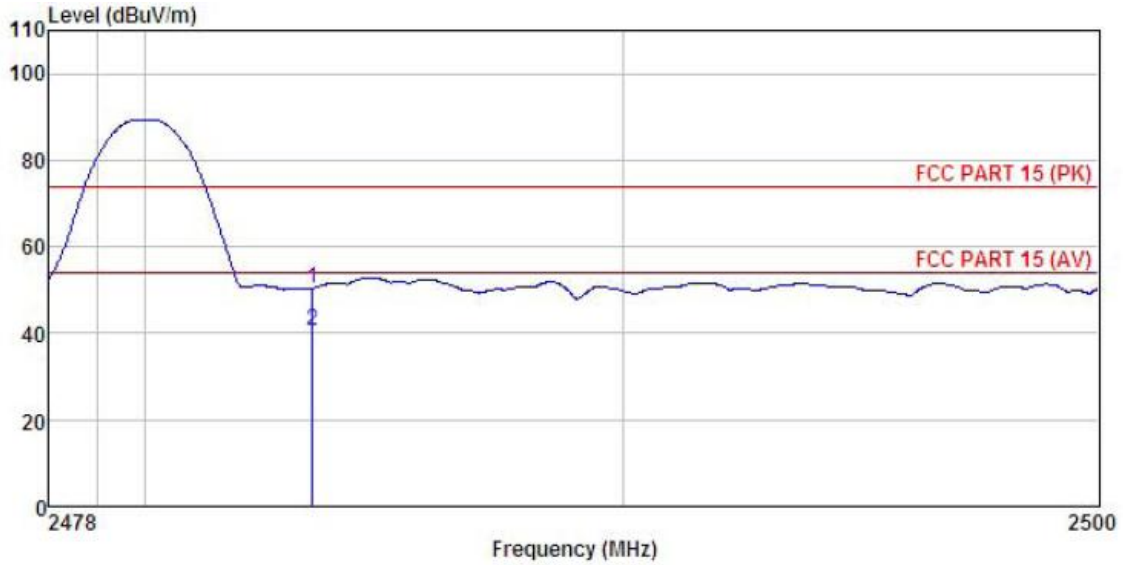


	Read	Antenna	Cable	Preamp	Limit	Over		
Freq	Level	Factor	Loss	Factor	Line	Limit	Remark	
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	18.26	27.36	4.81	0.00	50.43	74.00	-23.57 Peak
2	2483.500	8.41	27.36	4.81	0.00	40.58	54.00	-13.42 Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	Broadband Digital Transmission System	Product Model:	BLUE BEAN A
Test By:	Mike	Test mode:	2DH1 Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Humi: 57%

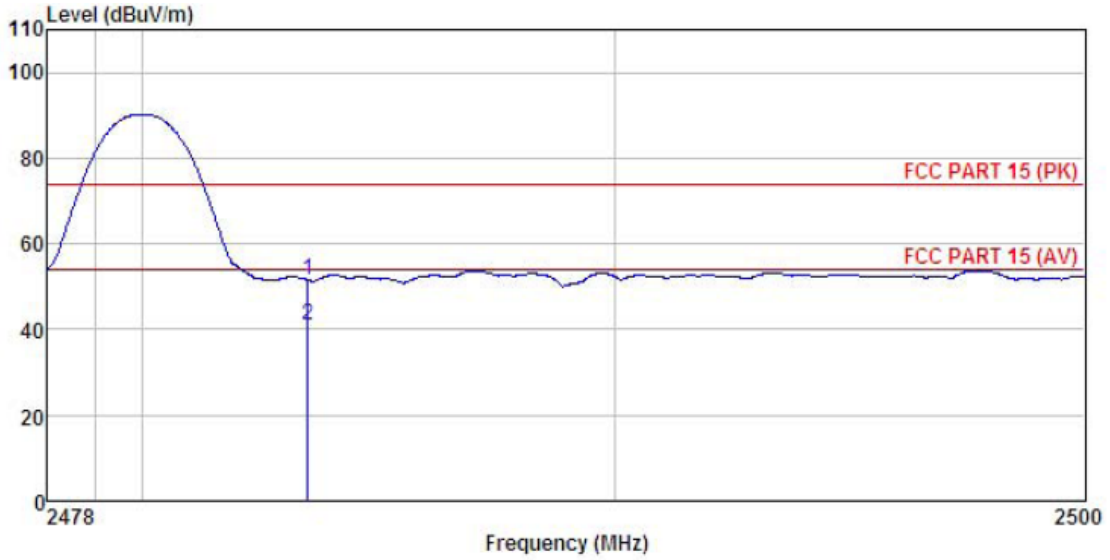


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	19.43	27.35	4.81	0.00	51.59	74.00	-22.41	Peak
2	2483.500	8.72	27.35	4.81	0.00	40.88	54.00	-13.12	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

8DPSK mode

Product Name:	Broadband Digital Transmission System	Product Model:	BLUE BEAN A
Test By:	Mike	Test mode:	3DH1 Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Humi: 57%

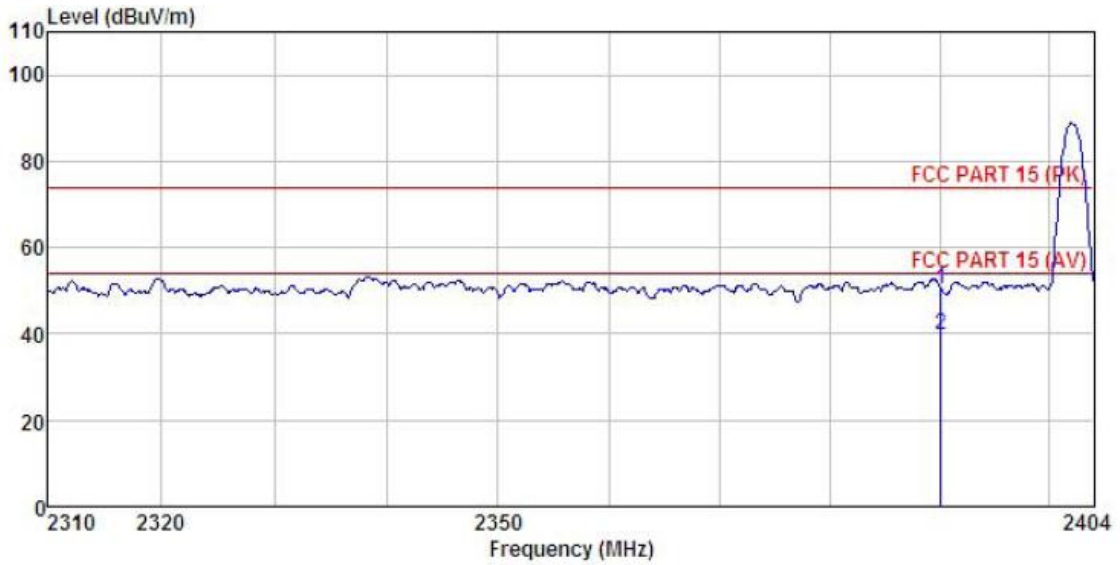


	Read Freq	Antenna Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	18.49	27.07	4.69	0.00	50.25	74.00	-23.75	Peak
2	2390.000	8.06	27.07	4.69	0.00	39.82	54.00	-14.18	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	Broadband Digital Transmission System	Product Model:	BLUE BEAN A
Test By:	Mike	Test mode:	3DH1 Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Humi: 57%

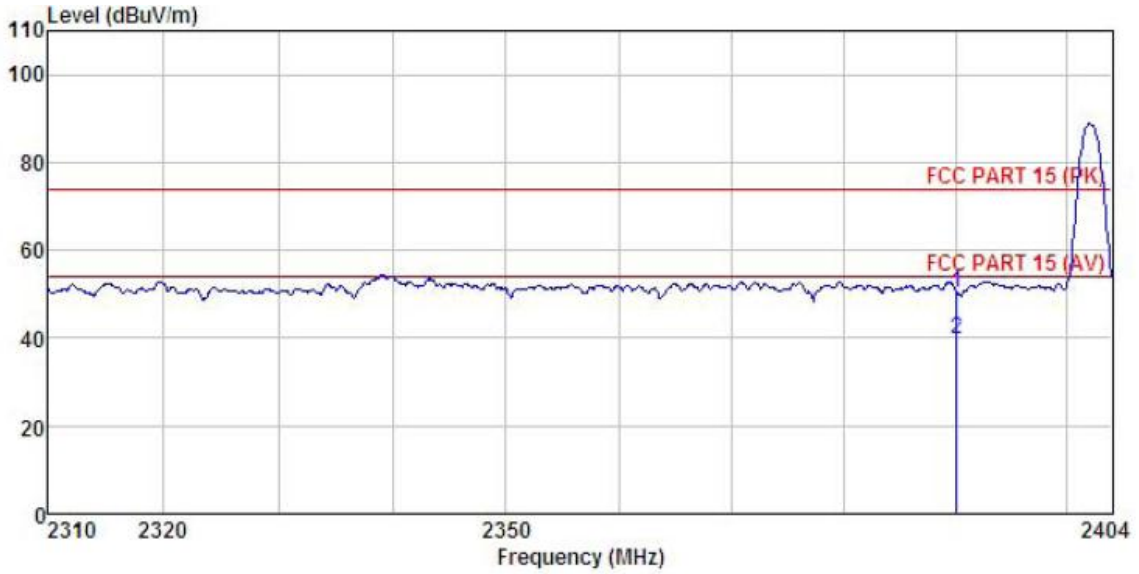


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	18.48	27.08	4.69	0.00	50.25	74.00	-23.75	Peak
2	2390.000	8.12	27.08	4.69	0.00	39.89	54.00	-14.11	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	Broadband Digital Transmission System	Product Model:	BLUE BEAN A
Test By:	Mike	Test mode:	3DH1 Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Humi: 57%

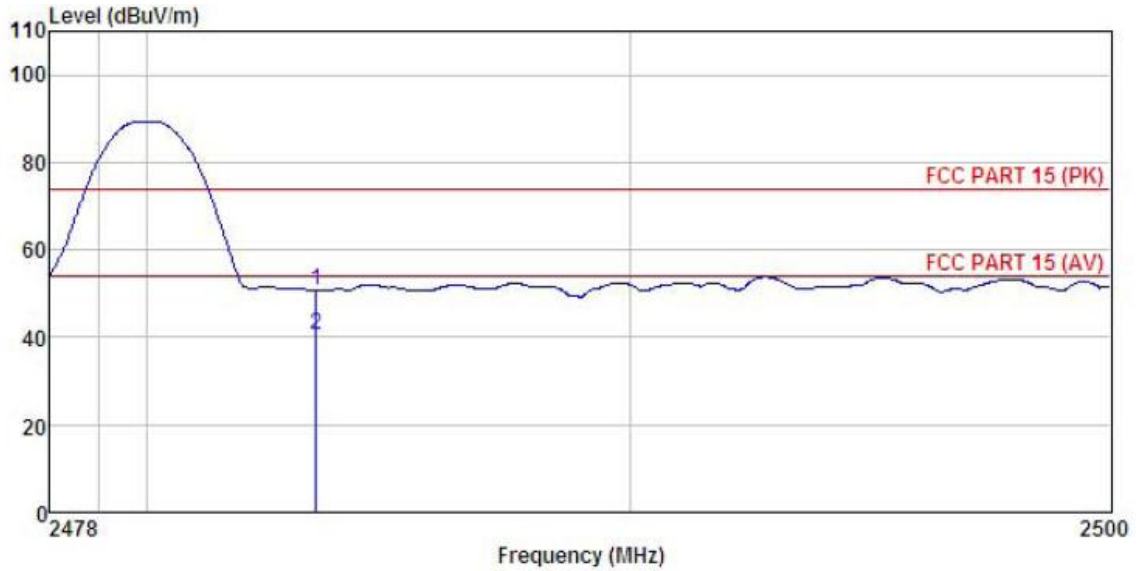


	Read	Antenna	Cable	Preamp	Limit	Over	
Freq	Level	Factor	Loss	Factor	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	2483.500	18.73	27.36	4.81	0.00	50.90	74.00 -23.10 Peak
2	2483.500	8.55	27.36	4.81	0.00	40.72	54.00 -13.28 Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	Broadband Digital Transmission System	Product Model:	BLUE BEAN A
Test By:	Mike	Test mode:	3DH1 Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Humi: 57%

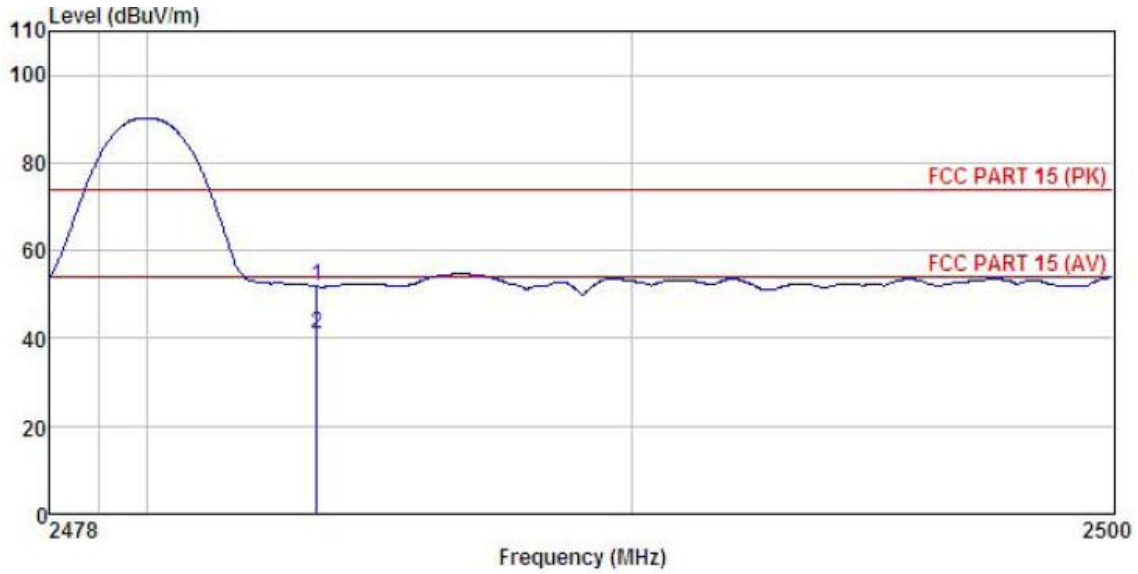


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	19.68	27.35	4.81	0.00	51.84	74.00	-22.16	Peak
2	2483.500	8.76	27.35	4.81	0.00	40.92	54.00	-13.08	Average

Remark:


1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

6.10 Spurious Emission

6.10.1 Conducted Emission Method

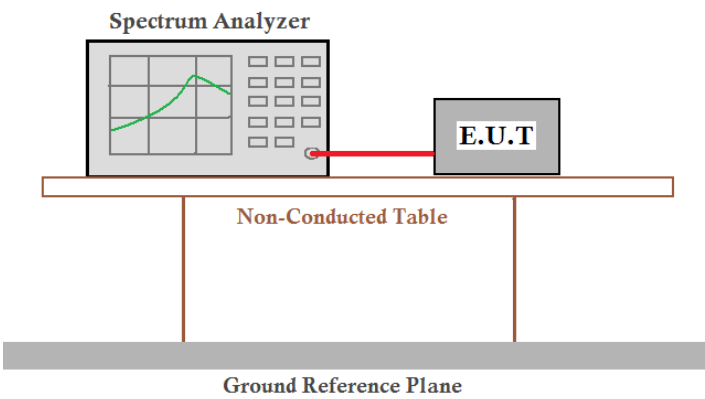
Test Requirement:	FCC Part 15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2013 and KDB 558074
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T are placed on a Non-Conducted Table. The table is supported by two legs and sits on a Ground Reference Plane.</p>
Test Instruments:	Refer to section 5.8 for details
Test mode:	Non-hopping mode
Test results:	Pass

Test plot as follows:

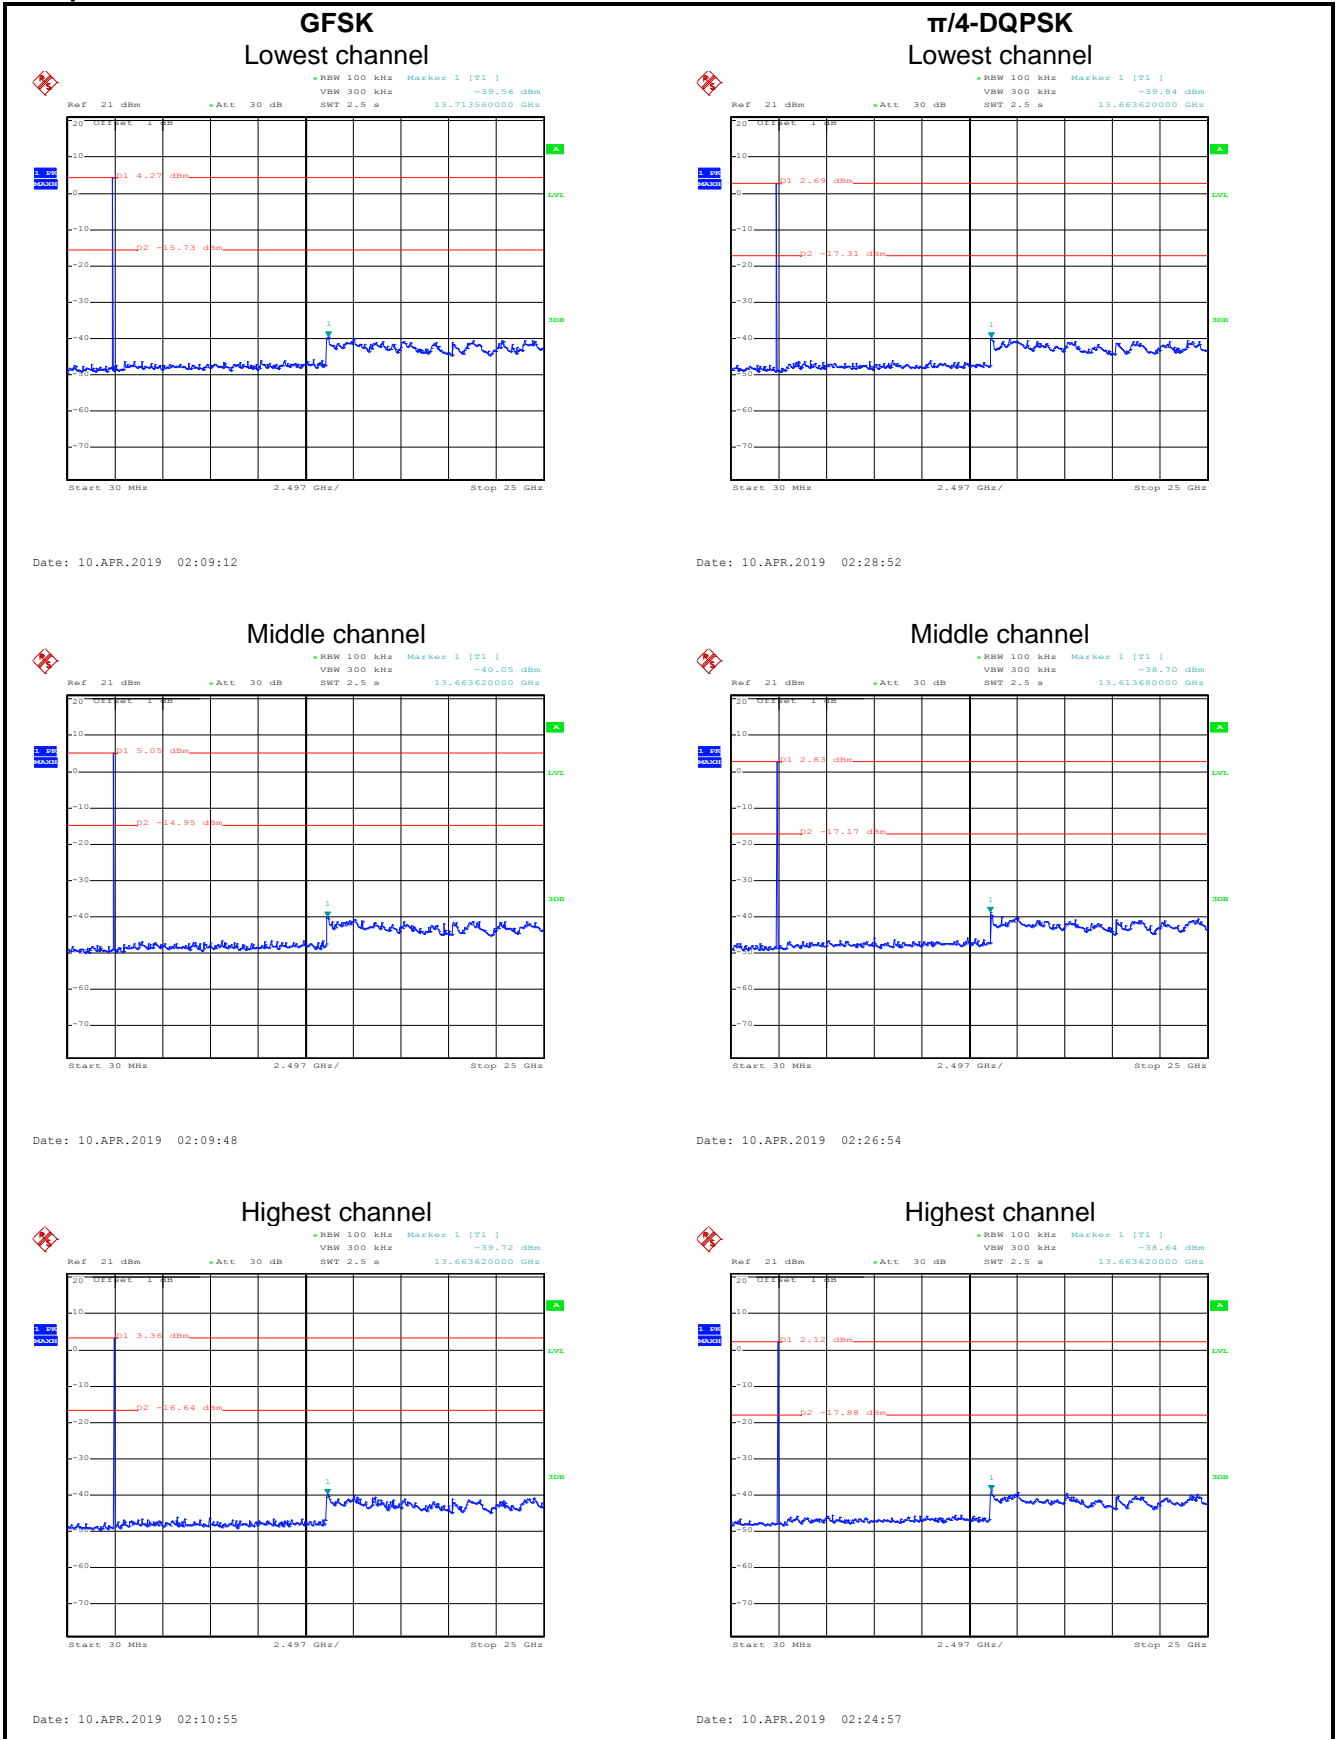


8DPSK

Lowest channel

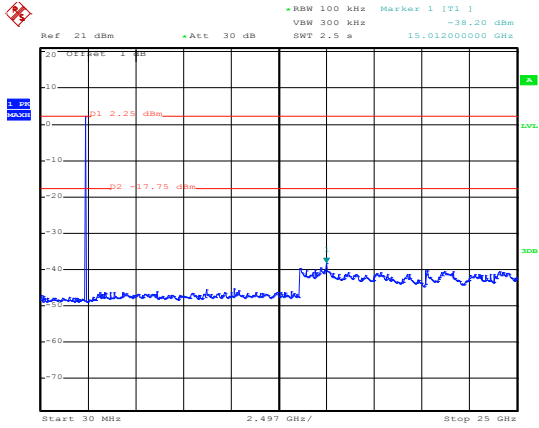


Date: 10.APR.2019 02:32:12

Middle channel

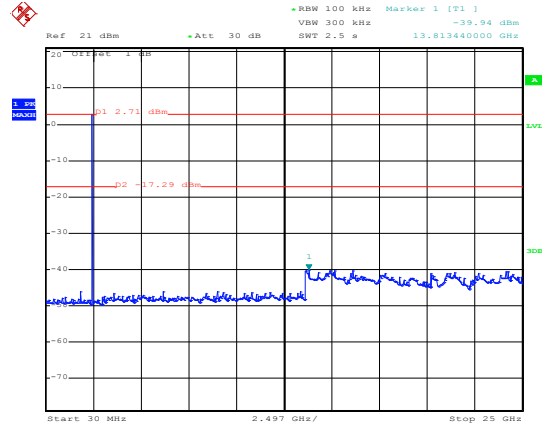

Date: 10.APR.2019 02:37:16

Highest channel

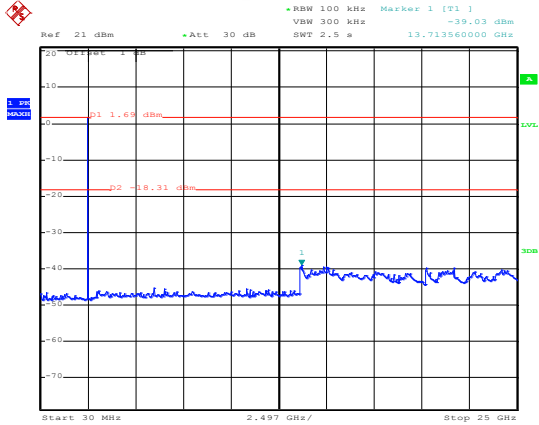

Date: 10.APR.2019 02:46:26

6.10.2 Radiated Emission Method


Test Requirement:	FCC Part 15 C Section 15.209				
Test Method:	ANSI C63.10: 2013				
Test Frequency Range:	9 kHz to 25 GHz				
Test Distance:	3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		RMS	1MHz	3MHz	Average Value
Limit:	Frequency	Limit (dBuV/m @3m)		Remark	
	30MHz-88MHz	40.0		Quasi-peak Value	
	88MHz-216MHz	43.5		Quasi-peak Value	
	216MHz-960MHz	46.0		Quasi-peak Value	
	Above 1GHz	54.0		Average Value	
		74.0		Peak Value	
Test setup:	Below 1GHz				
Test setup:	Above 1GHz				
Test Procedure:	1. The EUT was placed on the top of a rotating table 0.8m(below 1GHz) /1.5m(above 1GHz) above the ground at a 3 meter chamber. The table was rotated 360 degrees to determine the position of the highest radiation.				

	<ol style="list-style-type: none"> 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
Test Instruments:	Refer to section 5.8 for details
Test mode:	Non-hopping mode
Test results:	Pass
Remark:	<ol style="list-style-type: none"> 1. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis is the worst case. 2. 9 kHz to 30 MHz is noise floor, so only shows the data of above 30MHz in this report.

Measurement Data (worst case):

Below 1GHz:

Product Name:	Broadband Digital Transmission System	Product Model:	BLUE BEAN A
Test By:	Mike	Test mode:	BT Tx mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Humi: 57%

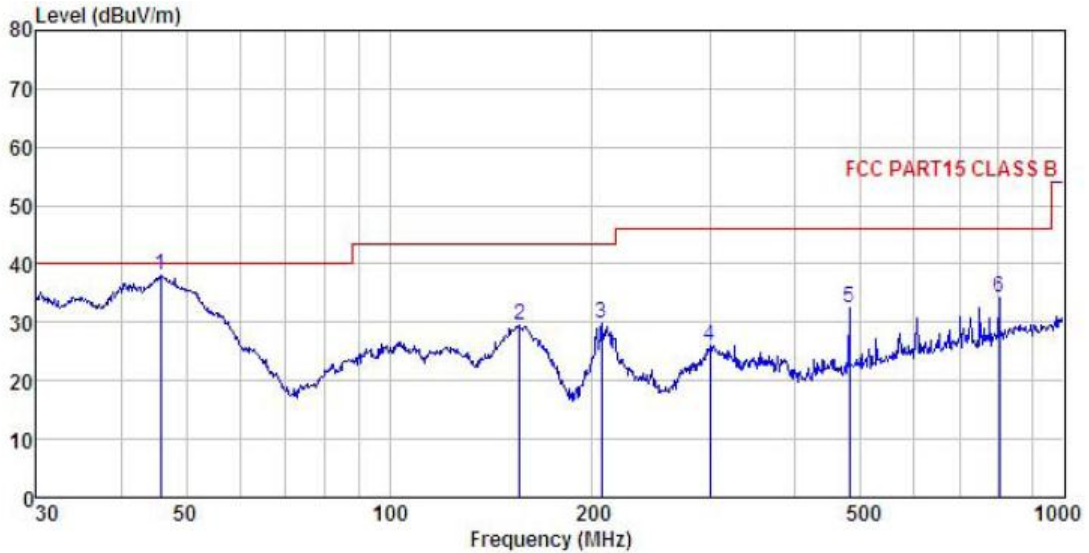


	Read Freq	Antenna Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	45.855	54.25	12.27	1.29	29.85	37.96	40.00	-2.04	QP
2	155.910	47.11	9.12	2.56	29.17	29.62	43.50	-13.88	QP
3	206.398	44.73	10.88	2.86	28.79	29.68	43.50	-13.82	QP
4	298.268	37.85	13.58	2.93	28.45	25.91	46.00	-20.09	QP
5	480.528	40.49	17.52	3.46	28.92	32.55	46.00	-13.45	QP
6	801.786	36.56	21.50	4.34	28.19	34.21	46.00	-11.79	QP

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	Broadband Digital Transmission System	Product Model:	BLUE BEAN A
Test By:	Mike	Test mode:	BT Tx mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Humi: 57%

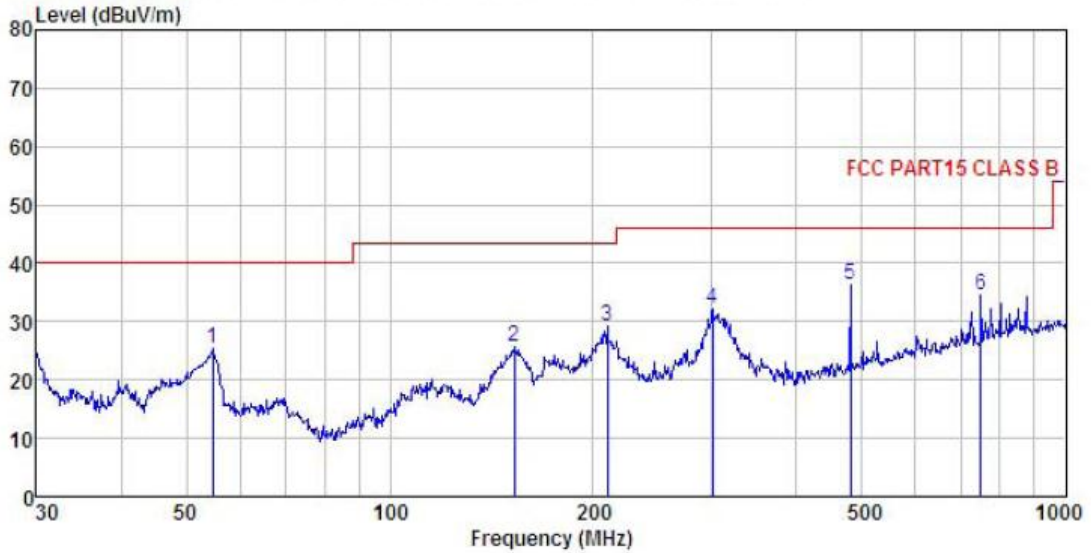


	ReadAntenna	Cable Preamp	Limit	Over					
Freq	Level	Factor	Loss	Factor	Level				
MHz	dBuV	dB/m	dB	dB	dBuV/m				
1	54.643	42.23	11.62	1.34	29.80	25.39	40.00	-14.61	QP
2	152.664	43.22	9.00	2.53	29.20	25.55	43.50	-17.95	QP
3	210.048	44.24	11.04	2.86	28.77	29.37	43.50	-14.13	QP
4	300.367	44.20	13.63	2.94	28.45	32.32	46.00	-13.68	QP
5	480.528	44.36	17.52	3.46	28.92	36.42	46.00	-9.58	QP
6	750.108	38.03	20.60	4.36	28.48	34.51	46.00	-11.49	QP

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	Broadband Digital Transmission System	Product Model:	BLUE BEAN C
Test By:	Mike	Test mode:	BT Tx mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Humi: 57%

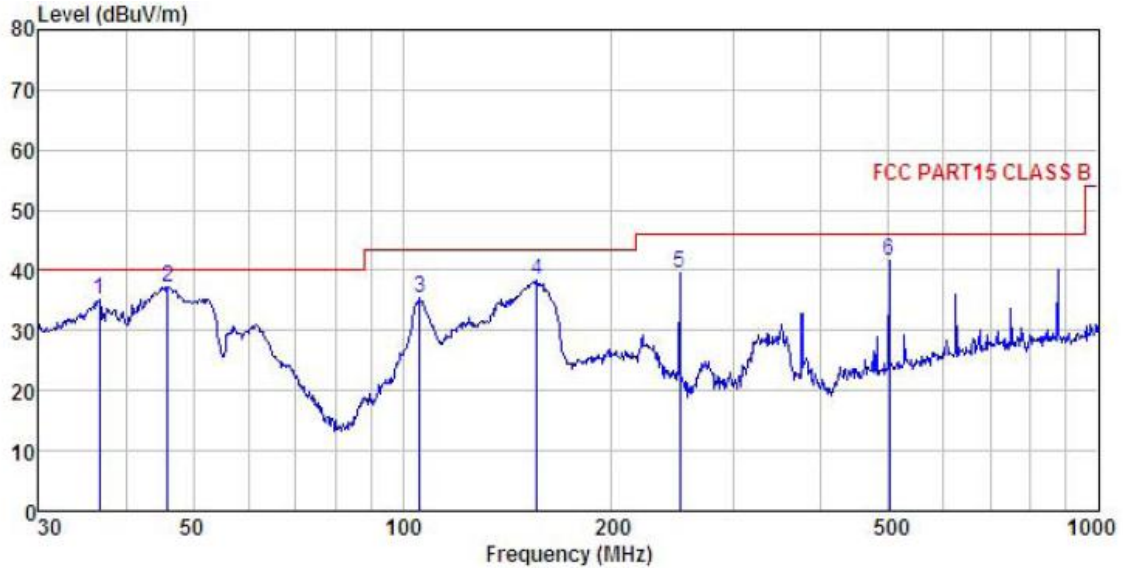


	ReadAntenna	Cable Preamp	Limit	Over					
Freq	Level	Factor	Loss	Factor	Level				
MHz	dBuV	dB/m	dB	dB	dBuV/m				
1	36.637	52.39	11.61	1.11	29.93	35.18	40.00	-4.82	QP
2	46.016	53.62	12.26	1.28	29.85	37.31	40.00	-2.69	QP
3	106.013	50.95	11.98	2.01	29.48	35.46	43.50	-8.04	QP
4	155.910	55.98	9.12	2.56	29.17	38.49	43.50	-5.01	QP
5	250.301	52.50	12.70	2.81	28.54	39.47	46.00	-6.53	QP
6	501.179	48.66	18.20	3.63	28.96	41.53	46.00	-4.47	QP

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	Broadband Digital Transmission System	Product Model:	BLUE BEAN C
Test By:	Mike	Test mode:	BT Tx mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Humi: 57%

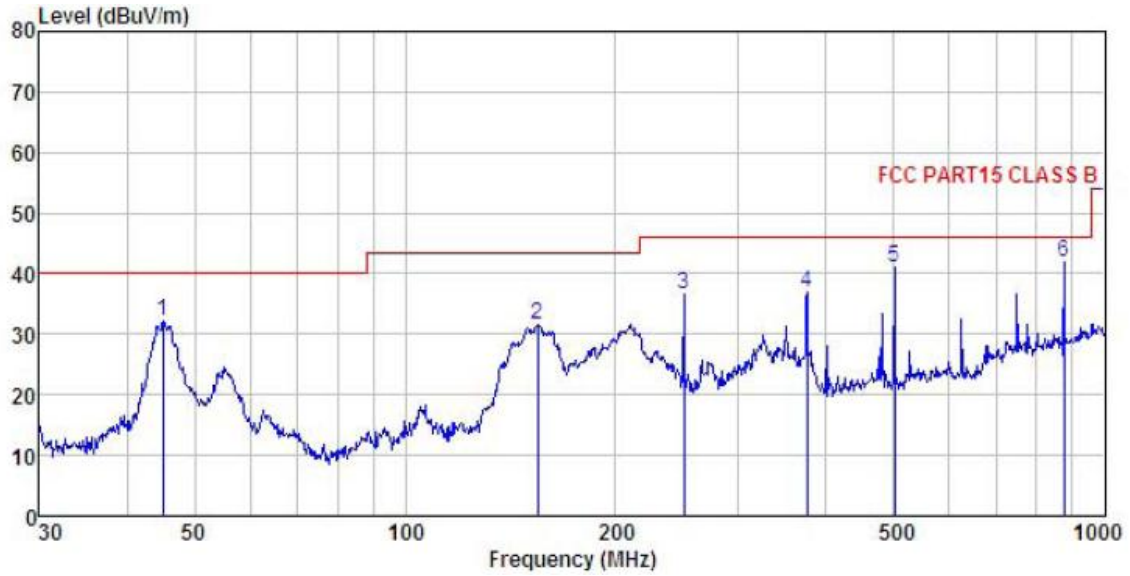


	Read Freq	Antenna Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit	Over	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	45.058	48.59	12.30	1.29	29.86	32.32	40.00	-7.68	QP
2	154.821	49.11	9.10	2.55	29.18	31.58	43.50	-11.92	QP
3	250.301	49.70	12.70	2.81	28.54	36.67	46.00	-9.33	QP
4	375.939	47.60	14.97	3.09	28.68	36.98	46.00	-9.02	QP
5	501.179	48.08	18.20	3.63	28.96	40.95	46.00	-5.05	QP
6	875.247	43.35	22.55	3.95	27.94	41.91	46.00	-4.09	QP

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor.
- The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	Broadband Digital Transmission System	Product Model:	RED BEAN A
Test By:	Mike	Test mode:	BT Tx mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Humi: 57%

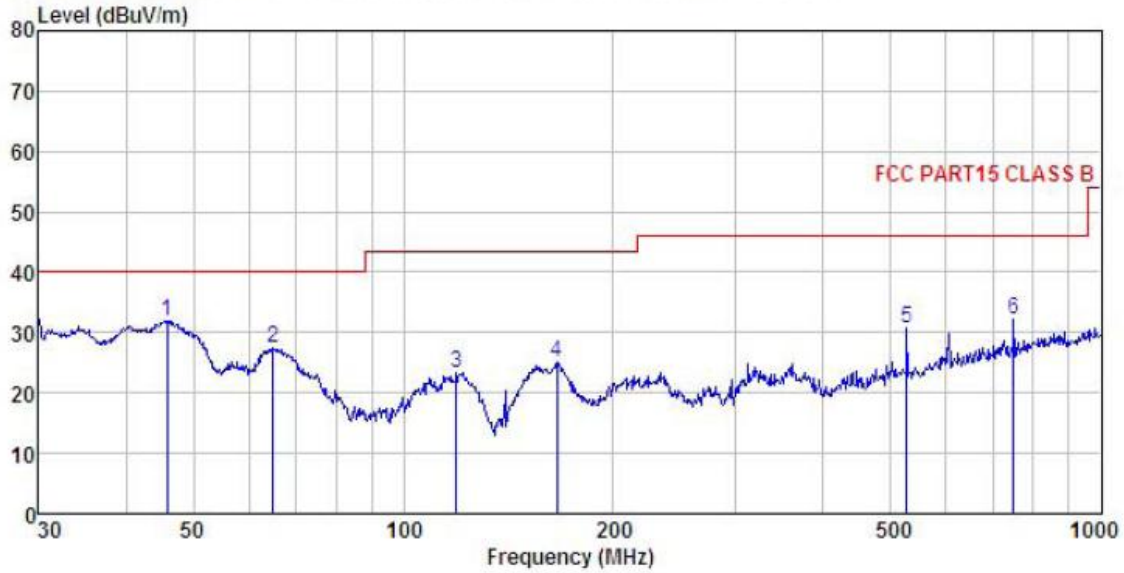


	Read Freq	Antenna Level	Cable Factor	Preamp Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	45.855	48.23	12.27	1.29	29.85	31.94	40.00	-8.06	QP
2	65.114	46.17	9.54	1.38	29.76	27.33	40.00	-12.67	QP
3	119.018	39.61	10.96	2.16	29.40	23.33	43.50	-20.17	QP
4	166.068	42.03	9.49	2.63	29.08	25.07	43.50	-18.43	QP
5	526.397	37.68	18.30	3.76	29.03	30.71	46.00	-15.29	QP
6	750.108	35.59	20.60	4.36	28.48	32.07	46.00	-13.93	QP

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	Broadband Digital Transmission System	Product Model:	RED BEAN A
Test By:	Mike	Test mode:	BT Tx mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Huni: 57%

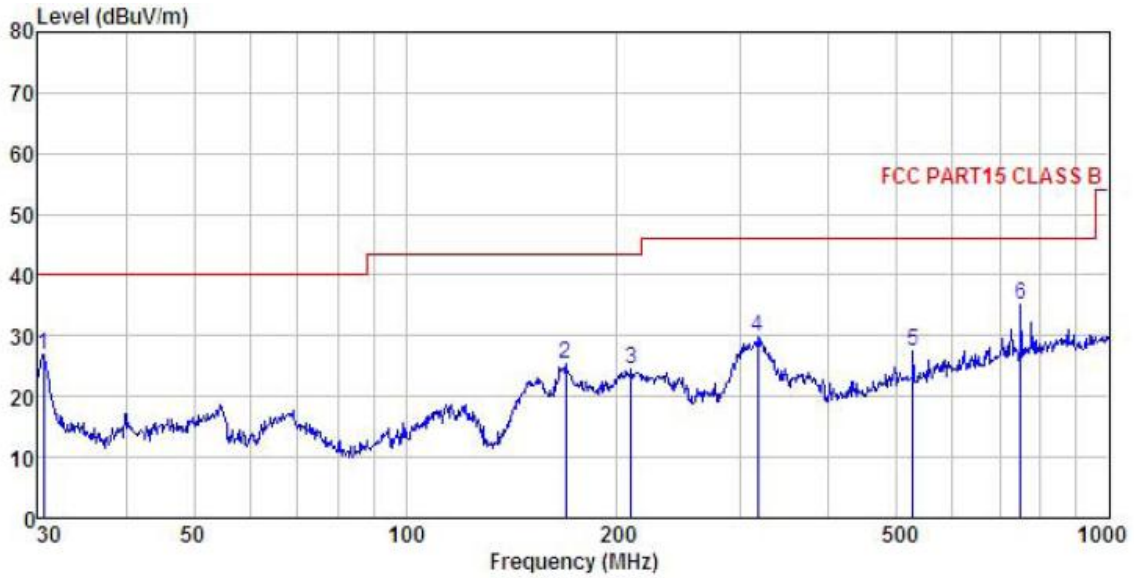


	ReadAntenna	Cable Preamp	Limit	Over	Remark			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	30.531	45.43	10.66	0.78	29.98	26.89	40.00	-13.11 QP
2	169.005	42.21	9.61	2.65	29.06	25.41	43.50	-18.09 QP
3	209.313	39.30	11.04	2.86	28.77	24.43	43.50	-19.07 QP
4	316.589	41.46	13.95	2.99	28.49	29.91	46.00	-16.09 QP
5	526.397	34.39	18.30	3.76	29.03	27.42	46.00	-18.58 QP
6	750.108	38.79	20.60	4.36	28.48	35.27	46.00	-10.73 QP

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	Broadband Digital Transmission System	Product Model:	RED BEAN C
Test By:	Mike	Test mode:	BT Tx mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Humi: 57%

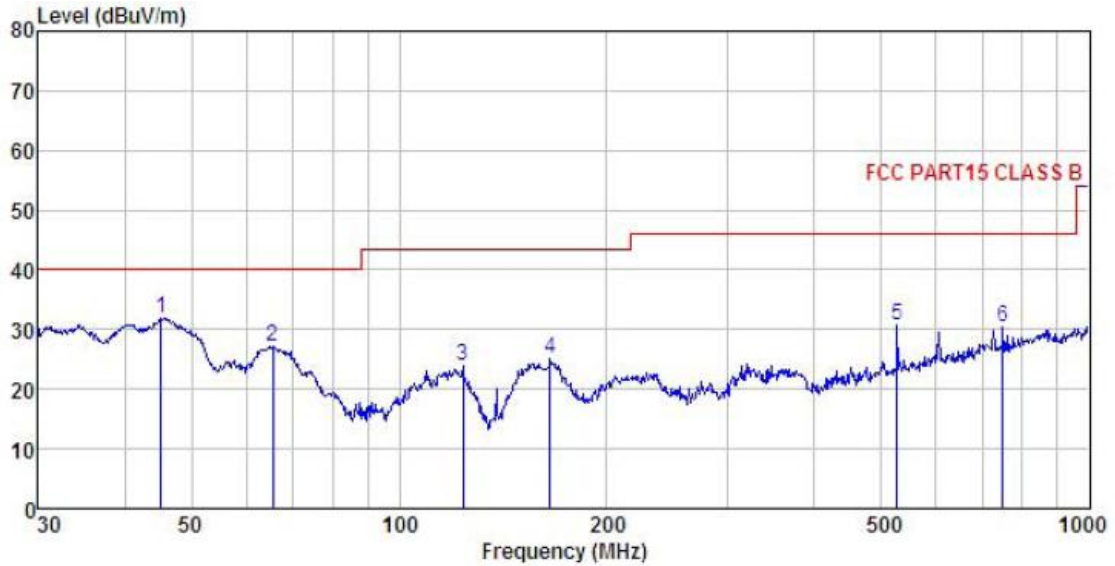


	ReadAntenna	Cable Preamp	Limit	Over					
Freq	Level	Factor	Loss	Factor	Level				
MHz	dBuV	dB/m	dB	dB	dBuV/m				
1	45.217	48.21	12.29	1.29	29.86	31.93	40.00	-8.07	QP
2	65.573	46.03	9.48	1.41	29.75	27.17	40.00	-12.83	QP
3	123.699	40.40	10.62	2.21	29.37	23.86	43.50	-19.64	QP
4	165.487	41.96	9.49	2.62	29.09	24.98	43.50	-18.52	QP
5	526.397	37.68	18.30	3.76	29.03	30.71	46.00	-15.29	QP
6	750.108	33.90	20.60	4.36	28.48	30.38	46.00	-15.62	QP

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	Broadband Digital Transmission System	Product Model:	RED BEAN C
Test By:	Mike	Test mode:	BT Tx mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Huni: 57%

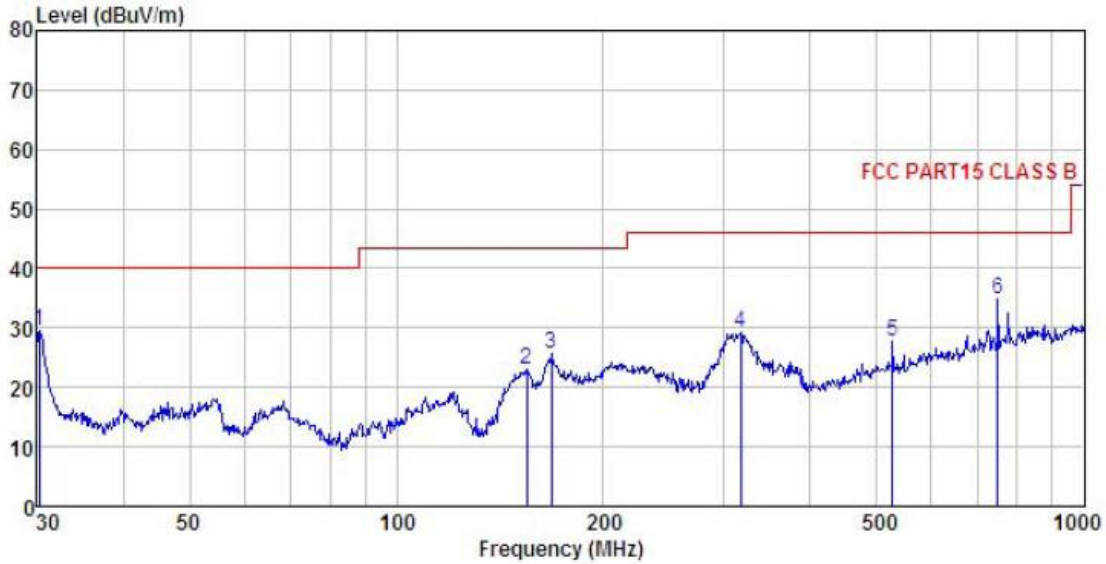

	Read Freq	Antenna Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	30.211	48.05	10.63	0.72	29.98	29.42	40.00	-10.58	QP
2	154.821	40.63	9.10	2.55	29.18	23.10	43.50	-20.40	QP
3	167.824	42.56	9.57	2.64	29.07	25.70	43.50	-17.80	QP
4	316.589	40.72	13.95	2.99	28.49	29.17	46.00	-16.83	QP
5	526.397	34.65	18.30	3.76	29.03	27.68	46.00	-18.32	QP
6	750.108	38.30	20.60	4.36	28.48	34.78	46.00	-11.22	QP

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Above 1GHz:

External ANT A:

Test channel: Lowest channel								
Detector: Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4804	46.87	30.85	6.80	41.81	42.71	74.00	-31.29	Vertical
4804	45.76	30.85	6.80	41.81	41.60	74.00	-32.40	Horizontal
Detector: Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4804.00	38.42	30.85	6.80	41.81	34.26	54	-19.74	Vertical
4804.00	37.64	30.85	6.80	41.81	33.48	54	-20.52	Horizontal
Test channel: Middle channel								
Detector: Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4882.00	45.87	31.20	6.86	41.84	42.09	74.00	-31.91	Vertical
4882.00	46.74	31.20	6.86	41.84	42.96	74.00	-31.04	Horizontal
Detector: Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4882.00	37.83	31.20	6.86	41.84	34.05	54.00	-19.95	Vertical
4882.00	38.37	31.20	6.86	41.84	34.59	54.00	-19.41	Horizontal
Test channel: Highest channel								
Detector: Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4960.00	47.24	31.63	6.91	41.87	43.91	74.00	-30.09	Vertical
4960.00	46.98	31.63	6.91	41.87	43.65	74.00	-30.35	Horizontal
Detector: Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4960.00	38.47	31.63	6.91	41.87	35.14	54.00	-18.86	Vertical
4960.00	37.92	31.63	6.91	41.87	34.59	54.00	-19.41	Horizontal
<i>Remark:</i>								
1. <i>Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor.</i>								
2. <i>The emission levels of other frequencies are very lower than the limit and not show in test report.</i>								

External ANT B:

Test channel: Lowest channel								
Detector: Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4804	47.94	30.85	6.80	41.81	43.78	74.00	-30.22	Vertical
4804	47.83	30.85	6.80	41.81	43.67	74.00	-30.33	Horizontal
Detector: Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4804.00	38.26	30.85	6.80	41.81	34.10	54	-19.90	Vertical
4804.00	37.94	30.85	6.80	41.81	33.78	54	-20.22	Horizontal
Test channel: Middle channel								
Detector: Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4882.00	47.12	31.20	6.86	41.84	43.34	74.00	-30.66	Vertical
4882.00	46.89	31.20	6.86	41.84	43.11	74.00	-30.89	Horizontal
Detector: Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4882.00	37.82	31.20	6.86	41.84	34.04	54.00	-19.96	Vertical
4882.00	37.56	31.20	6.86	41.84	33.78	54.00	-20.22	Horizontal
Test channel: Highest channel								
Detector: Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4960.00	47.96	31.63	6.91	41.87	44.63	74.00	-29.37	Vertical
4960.00	47.06	31.63	6.91	41.87	43.73	74.00	-30.27	Horizontal
Detector: Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4960.00	38.26	31.63	6.91	41.87	34.93	54.00	-19.07	Vertical
4960.00	37.37	31.63	6.91	41.87	34.04	54.00	-19.96	Horizontal
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.								

Ceramic ANT:

Test channel: Lowest channel								
Detector: Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4804	46.36	30.85	6.80	41.81	42.20	74.00	-31.80	Vertical
4804	45.43	30.85	6.80	41.81	41.27	74.00	-32.73	Horizontal
Detector: Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4804.00	37.98	30.85	6.80	41.81	33.82	54	-20.18	Vertical
4804.00	37.24	30.85	6.80	41.81	33.08	54	-20.92	Horizontal
Test channel: Middle channel								
Detector: Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4882.00	45.56	31.20	6.86	41.84	41.78	74.00	-32.22	Vertical
4882.00	46.27	31.20	6.86	41.84	42.49	74.00	-31.51	Horizontal
Detector: Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4882.00	36.32	31.20	6.86	41.84	32.54	54.00	-21.46	Vertical
4882.00	36.98	31.20	6.86	41.84	33.20	54.00	-20.80	Horizontal
Test channel: Highest channel								
Detector: Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4960.00	46.89	31.63	6.91	41.87	43.56	74.00	-30.44	Vertical
4960.00	47.02	31.63	6.91	41.87	43.69	74.00	-30.31	Horizontal
Detector: Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4960.00	37.12	31.63	6.91	41.87	33.79	54.00	-20.21	Vertical
4960.00	37.61	31.63	6.91	41.87	34.28	54.00	-19.72	Horizontal
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.								