

RED bean is a high performance and ultra low power surface mount SDIO radio combining single-stream 11ac Wave2 Wi-Fi and Bluetooth® 5.0 in a very small form factor

RED bean is IEEE 802.11b/g/n/a/ac Wave2 dual-band wireless LAN and Bluetooth 5.0 SDIO 3.0 module optimised for small size and low power consumption.

It is based on Qualcomm QCA9377-3 chipset. Has an integrated dual-band (2.4 and 5 GHz) 1x1 802.11ac Wave2 WiFi (supporting MU-MIMO) and Bluetooth® 5.0 transceivers and combined in to very small form factor (17 x 12 mm with RF connector and 24 x 12mm with integrated antenna).


The radio module supports advanced power saving techniques. Bluetooth supports both Class1 and Class2 transmissions and advanced coexistence mechanisms allow it to work seamlessly with Wi-Fi ensuring good quality and high performance.

RED bean software drivers are available for Linux, Windows 10 and Android operating systems.


Quick specs

- 802.11a/b/g/n/ac, 2.4 and 5 GHz, 1x1 SISO, 433 Mbps data rate, up to 20 dBm output power
- 20/40/80 MHz channel size support
- STBC, MU-MIMO, transmit beam-forming
- Bluetooth v5.0, BLE, ANT+ and backwards compatibility with BT v1.x and BT v2.x + enhanced data rate
- Connectorized (Murata HSC type connector: MM4829-2702RB0) or an integrated dual-band antenna version
- Linux, Windows and Android drivers available
- Based on QCA9377-3 chipset
- Industrial temperature range -40 to +85 C°
- Very small form factor (17 by 12 mm without antenna or 24 by 12 mm with antenna)
- Surface mount, dual-side design
- Available interfaces - Bluetooth UART, WLAN SDIO 3.0

Block diagram

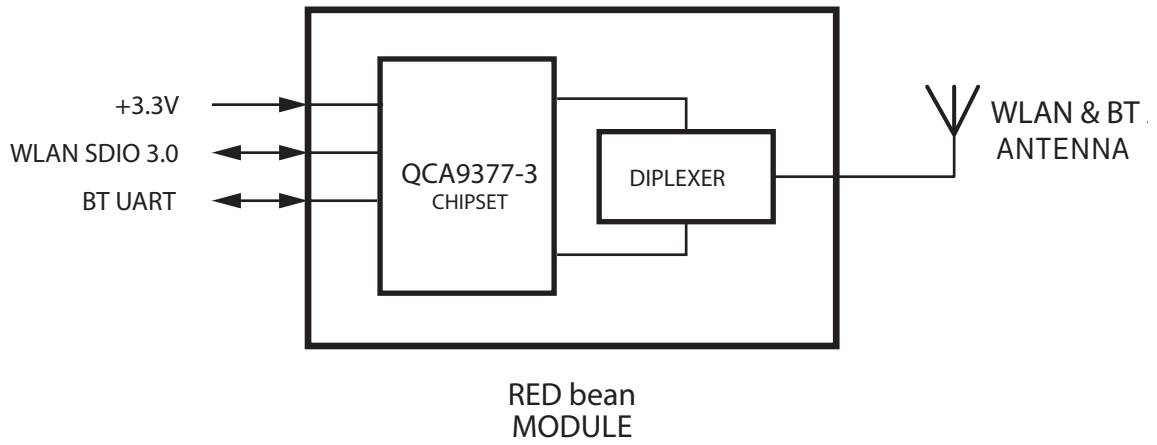

Module dimensions (with antenna/ without antenna)

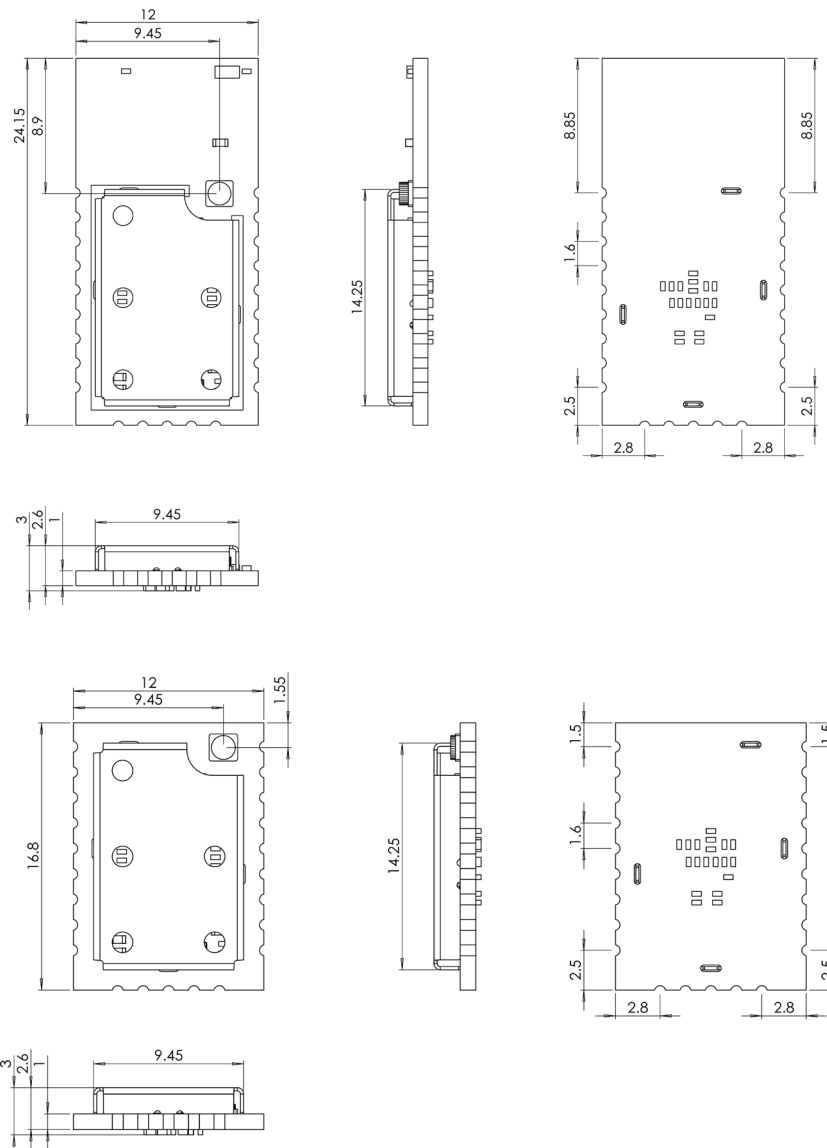

Radio characteristics

2.4 GHz 802.11AC (20 MHz)	Data rate (Mbps)	7.2	14.4	21.7	28.9	43.3	57.8	65	72.2	86.7	
	Sensitivity (dBm)	-92	-89	-87	-83	-80	-76	-75	-73	-69	
	Output power (dBm)	18	18	18	18	18	16	16	16	15	
2.4 GHz 802.11AC (40 MHz)	Data rate (Mbps)	15	30	45	60	90	120	135	150	180	200
	Sensitivity (dBm)	-88	-86	-84	-81	-77	-73	-72	-70	-66	-64
	Output power (dBm)	17	17	17	17	17	15	15	15	13	13
5 GHz 802.11AC (20 MHz)	Data rate (Mbps)	7.2	14.4	21.7	28.9	43.3	57.8	65	72.2	86.7	
	Sensitivity (dBm)	-91	-87	-85	-82	-78	-74	-73	-71	-67	
	Output power (dBm)	15	15	15	14	14	12	11	10	10	
5 GHz 802.11AC (40 MHz)	Data rate (Mbps)	15	30	45	60	90	120	135	150	180	200
	Sensitivity (dBm)	-87	-85	-82	-79	-76	-72	-70	-68	-65	-63
	Output power (dBm)	14	14	14	13	13	12	11	9	9	8
5 GHz 802.11AC (80 MHz)	Data rate (Mbps)	32.5	65	97.5	130	195	260	292.5	325	390	433.3
	Sensitivity (dBm)	-84	-81	-78	-76	-72	-68	-67	-65	-61	-59
	Output power (dBm)	13	13	13	12	12	11	11	9	9	8
Bluetooth	Frequency range	2.402 - 2.480 GHz									
	Supported modes	BT and BLE									
	Max TX power	14 dBm (4 dBm BLE)									
	RX sensitivity (BER >= 0.1%)	-95 dBm (-99 dBm BLE)									

Power consumption



Wi-Fi mode	mA	Bluetooth mode	mA
Standby (deep sleep)	0.16	Continuous Rx burst	22
2G tx99 11b 1Mbps	356	Continuous Tx Class 2 (+4 dBm)	38
2G tx99 11n HT20 MCS7	326	Continuous Tx Class 2 (+12.5 dBm)	64
5G tx99 11n HT20 MCS0	487	1.28 sec page scan (non-interlaced)	0.31
5G tx99 11n HT20 MCS7	422	1.28 sec LE ADV	0.18
5G tx99 11ac VHT80 MCS9	421	1.28 sec sniff as master	0.17
		1.28 sec sniff as slave	0.22

Operating conditions

The module can operate in a wide temperature range and different conditions depending on the enclosure. The following guidelines guarantee that it will work correctly.

Parameter	Units	Min	Max
Working temperature	°C	-40	85
Storage temperature	°C	-40	90
Humidity	%RH	10	90
Storage humidity	%RH	5	90

Pinout Information (with antenna/ without antenna)

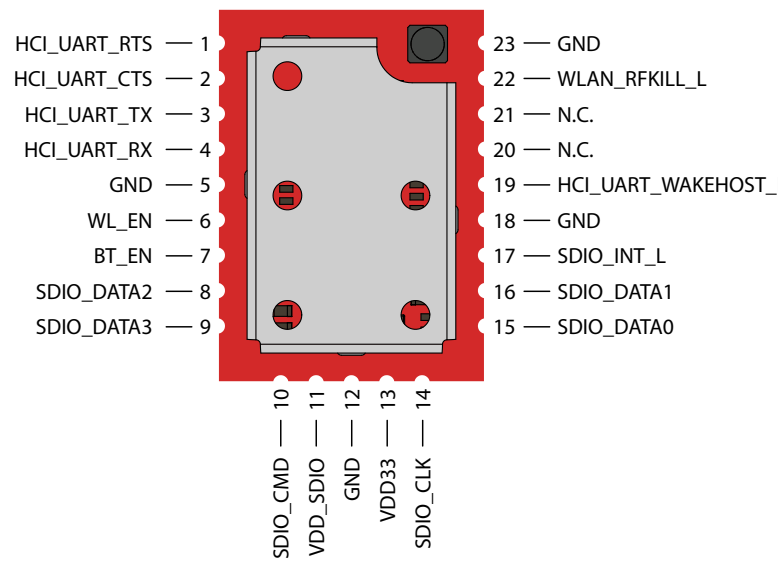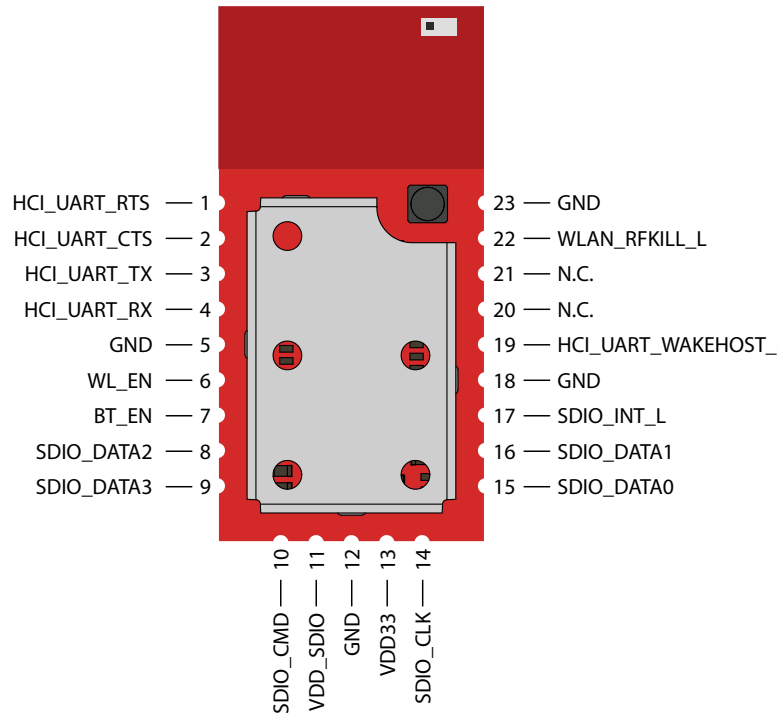

Pin	Name	I/O	Description
1	HCI_UART_RTS	DO	UART RTS signal
2	HCI_UART_CTS	DI	UART CTS signal
3	HCI_UART_TX	DO	UART TX signal
4	HCI_UART_RX	DI	UART RX signal
5	GND	-	Ground connection
6	WL_EN	PU	WLAN enable. Active high
7	BT_EN	PU	Bluetooth enable. Active high
8	SDIO_DATA2	B	SDIO data bus D2
9	SDIO_DATA3	B	SDIO data bus D3
10	SDIO_CMD	DI	SDIO CMD line signal
11	VDD_SDIO	PI	Voltage supply input 1.8V or 3.3V
12	GND	-	Ground connection
13	VDD33	PI	+3V3 digital power supply
14	SDIO_CLK	OD	SDIO clock signal
15	SDIO_DATA0	B	SDIO data bus D0
16	SDIO_DATA1	B	SDIO data bus D1
17	SDIO_INT_L	DO	SDIO interrupt signal
18	GND	-	Ground connection
19	HCI_UART_WAKEHOST_L	OD	Bluetooth wakeup host. Active high
20	N.C.	-	Not connected
21	N.C.	-	Not connected
22	WLAN_RFKILL_L	PU	Turn off WLAN RF analog at front-end. Active low
23	GND	-	Ground connection

DO - Digital output signal

DI - Digital input CMOS

B - Bidirectional digital with CMOS input

PI - Power input

OD - A digital output signal with open drain

PU - Input signals with weak internal pull-up, to prevent signals from floating when left open

Power supply

Use pins 11, 13 for module powering. For SDIO3.0 mode use 1.8V, in SDIO2.0 mode module can be powered 1.8V or 3.3V.


Power ratings

Parameter	Units	Min	Nominal	Max
Supply voltage (VDD33)	V	3.135	3.3	3.465
Supply voltage (VDD_SDIO)	V	-	1.8 or 3.3	-


Software

Drivers for RED bean SDIO module (based on QCA9377-3) are available for Windows 7, Windows 10, Linux and Android operating systems.


PCB footprint (same for RED bean C and RED bean A modules)

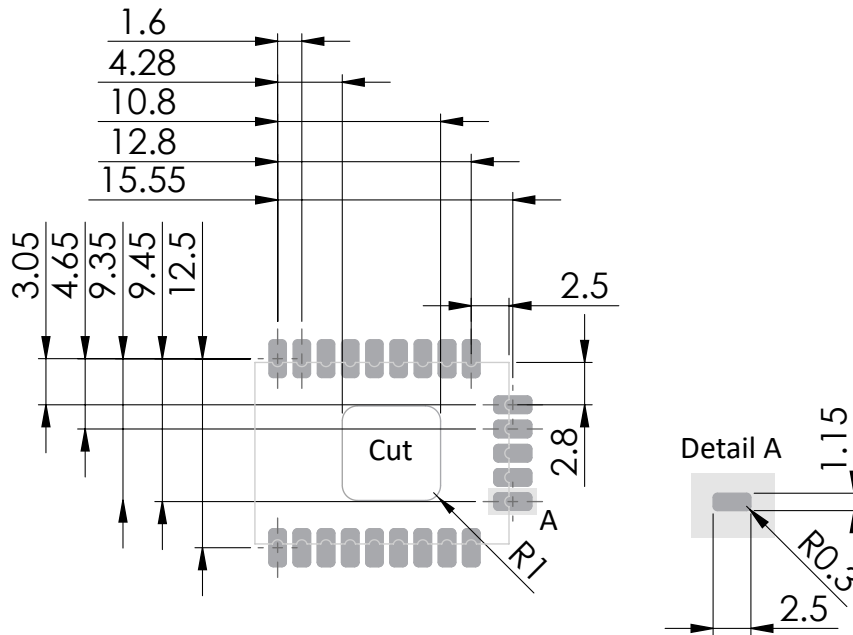

Soldering paste footprint (same for RED bean C and RED bean A modules)

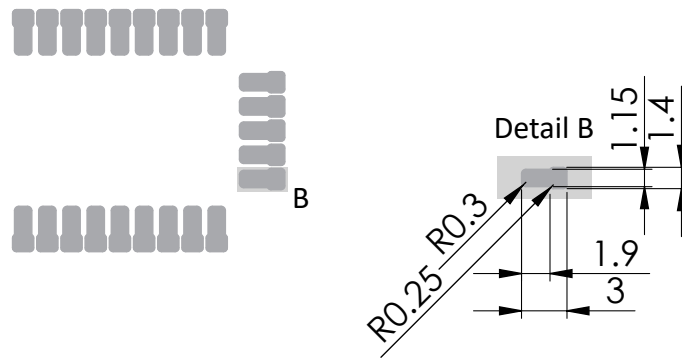

Development kit

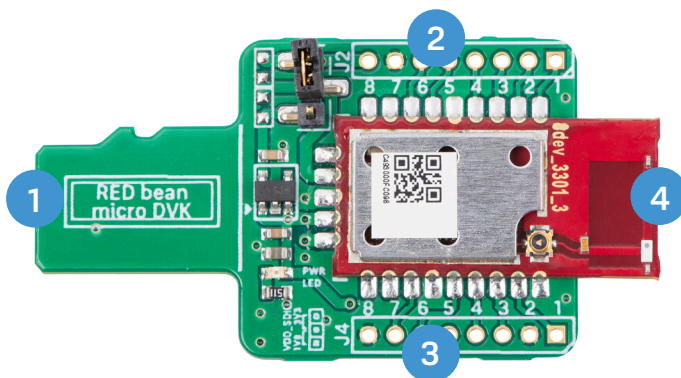


- 1 - SDIO interface (micro SD)
- 2, 3 - Module breakout for accessing HCI UART and other functionality
- 4 - RED bean module

Reflow profile recommendation

Ramp up rate	3°C/second max
Maximum time maintained above 217°C	120 seconds
Peak temperature	250°C
Maximum time within 5°C of peak temperature	20 seconds
Ramp down rate	6°C/second max

Reflow profile

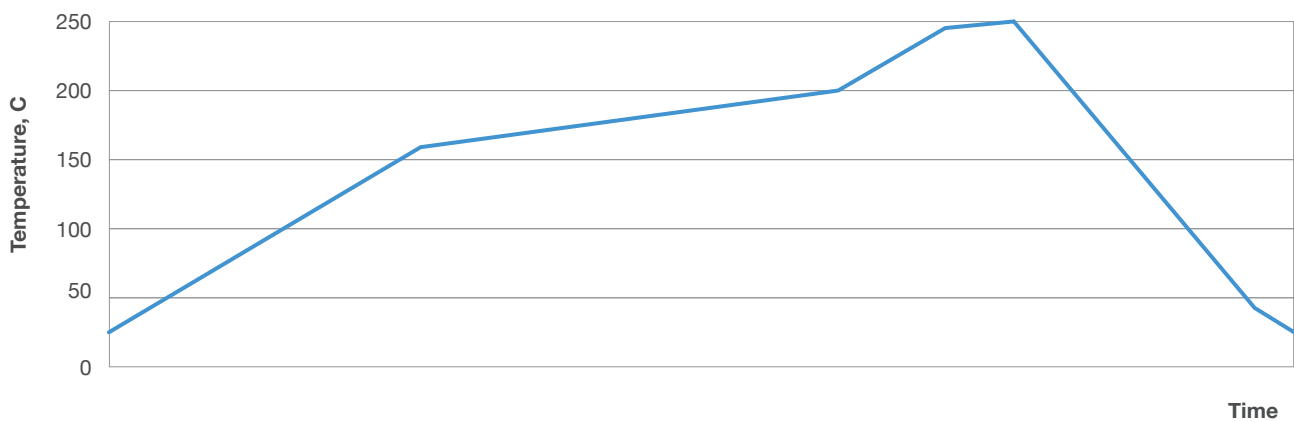


Ordering part number

RED-BEAN-C	RED bean with connector for external antenna
RED-BEAN-A	RED bean with an integrated dual-band ceramic omni-directional antenna
RED-BEAN-DVK	RED bean development kit. Comes with an integrated antenna module


Packaging

RED bean modules are packed into vacuum sealed trays. A tray of RED-BEAN-A fits 60 modules and a tray of RED-BEAN-C fits 78 modules. Every 5 trays are vacuum sealed packaging 300 of RED-BEAN-A modules or 390 of RED-BEAN-C modules.

RED-BEAN-A tray

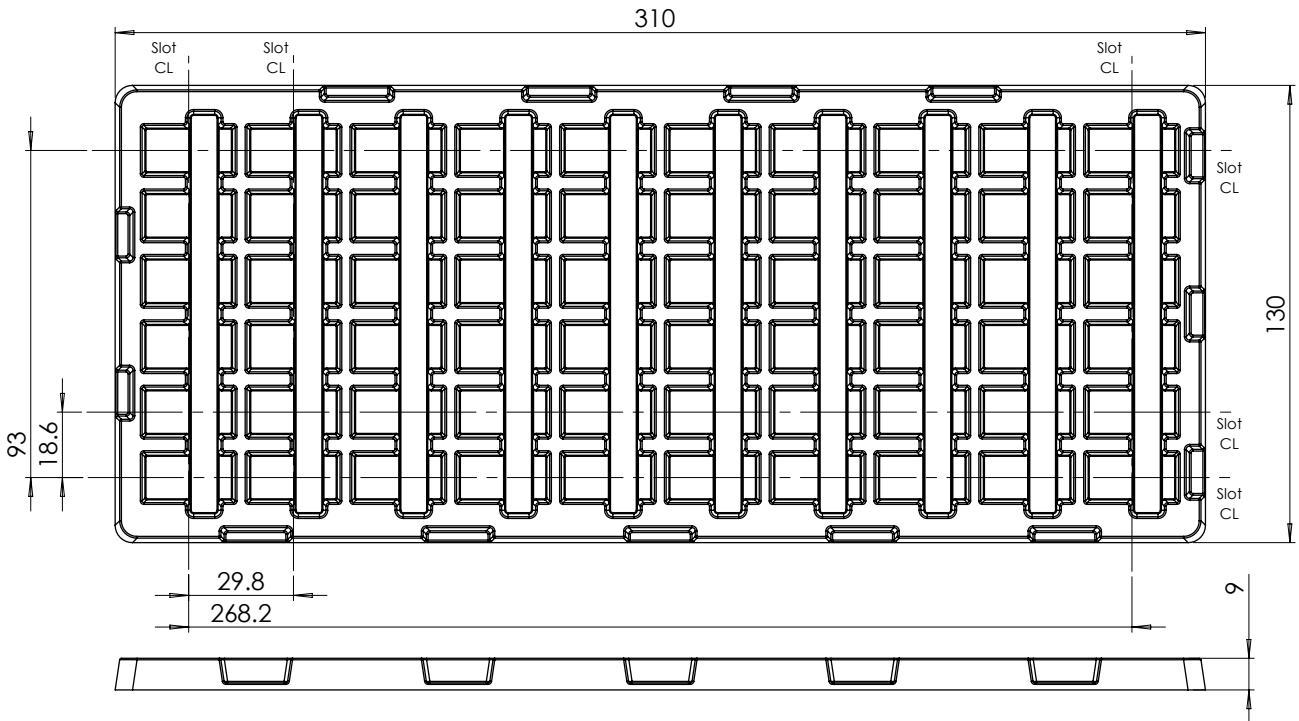


RED-BEAN-C tray

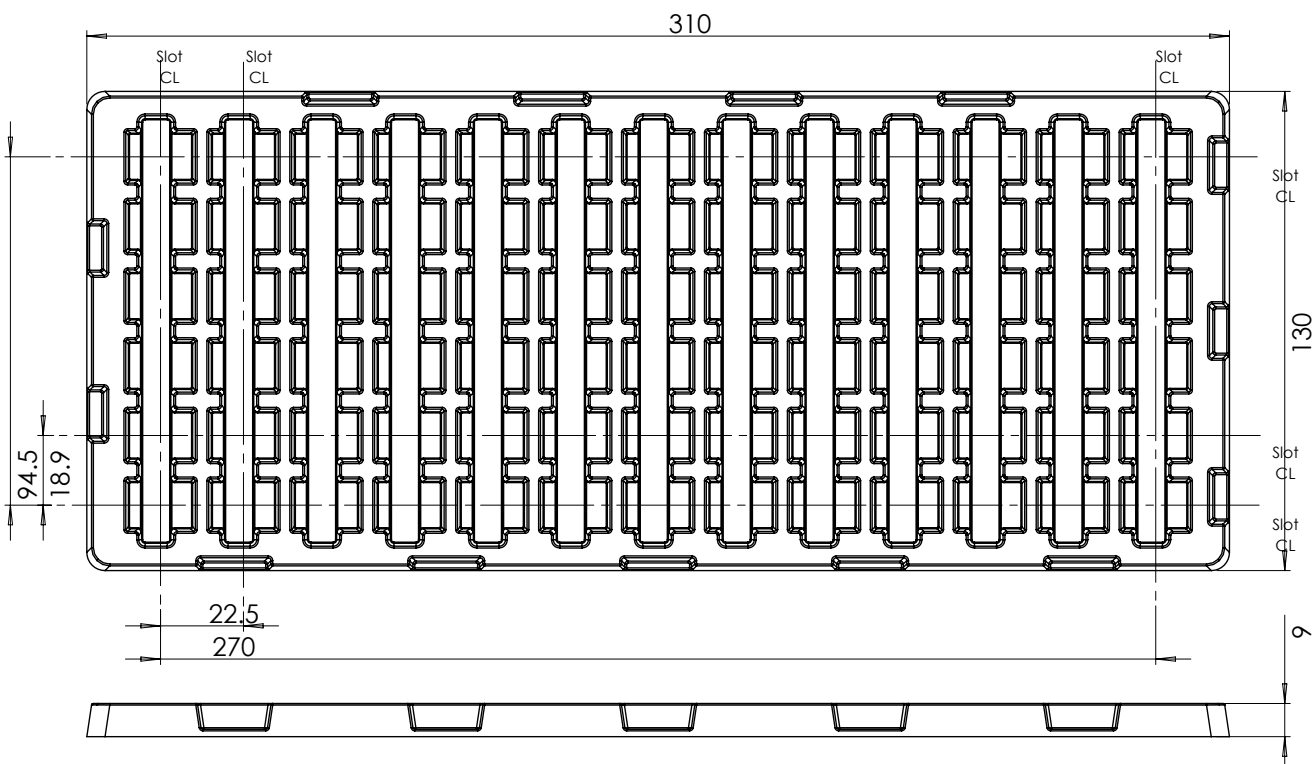

Antenna info


1. Type: External antenna
Gain: 2.4G : 4.0 dBi 5G: 4.5 dBi
Manufacturer: RF Solutions Ltd



2. Type: External antenna
Gain: 2.4G : 3.2 dBi 5G: 4.25 dBi
Manufacturer: molex



3. Type: Ceramic Antenna
Gain: 2.4G : 3.0 dBi 5G: 3.0 dBi
Manufacturer: TDK

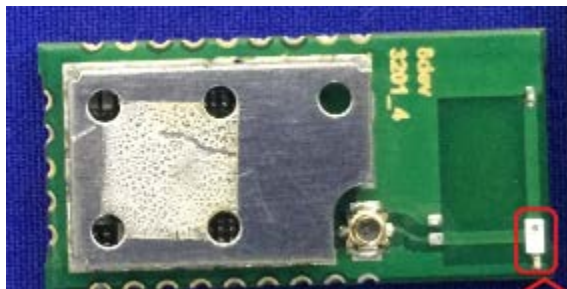

FCC Statement

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Radiation Exposure Statement:

The antenna must be installed such that 20 cm is maintained between the antenna and users. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

Important Notice to OEM integrators:

If the FCC identification number is not visible when the module is installed inside another device, then the outside of the device into which the module is installed must also display a label referring to the enclosed module.

This exterior label can use wording such as the following: "Contains Transmitter Module FCC ID: Z9W-MB Or Contains FCC ID: Z9W-MB"

When the module is installed inside another device, the user manual of the host must contain below warning statements;

1. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference.

(2) This device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

2. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment should be installed and operated with minimum distance 20 cm between the radiator & your body.

OEM integrator /End product manufacturer must perform the test of radiated & conducted emission and spurious emission,etc. according to FCC part 15C : 15.249 and 15.209 & 15.207 ,15B Class B requirement, Only if the test result comply with FCC part 15C : 15.249 and 15.209 & 15.207 ,15B Class B requirement, then the end product can be sold legally.

IC STATEMENT

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

(1) This device may not cause interference.

(2) This device must accept any interference, including interference that may cause undesired operation of the device

Cet appareil contient des émetteurs / récepteurs exemptés de licence conformes aux RSS (RSS) d'Innovation, Sciences

et Développement économique Canada. Le fonctionnement est soumis aux deux conditions suivantes :

(1) Cet appareil ne doit pas causer d'interférences.

(2) Cet appareil doit accepter toutes les interférences, y compris celles susceptibles de provoquer un fonctionnement

indésirable de l'appareil.

IC Radiation Exposure Statement

This modular complies with IC RF radiation exposure limits set forth for an uncontrolled environment. This transmitter

must not be co-located or operating in conjunction with any other antenna or transmitter.

If the IC number is not visible when the module is installed inside another device, then the outside of the device into

which the module is installed must also display a label referring to the enclosed module. This exterior label can use wording such as the following: "Contains IC: 11468A-MB"

when the module is installed inside another device, the user manual of this device must contain below warning statements;

1. This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic

Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

(1) This device may not cause interference.

(2) This device must accept any interference, including interference that may cause undesired operation of the device.

2. Cet appareil contient des émetteurs / récepteurs exemptés de licence conformes aux RSS (RSS) d'Innovation, Sciences et Développement économique Canada. Le fonctionnement est soumis aux deux conditions suivantes :

(1) Cet appareil ne doit pas causer d'interférences.

(2) Cet appareil doit accepter toutes les interférences, y compris celles susceptibles de provoquer un fonctionnement

indésirable de l'appareil.

The devices must be installed and used in strict accordance with the manufacturer's instructions as described in the user

documentation that comes with the product.