



TEST REPORT

No.I21N03152-SAR

For

IDEMIA Identity and Security France

ID Screen 60

Model Name: MPH-MB004A

With

Hardware Version: V02

Software Version: IDEMIA_WM38_V01_211020

FCC ID: ZBW-MPHMB004

Issued Date: 2022-01-21

Designation Number: CN1210

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of SAICT.

Test Laboratory:

SAICT, Shenzhen Academy of Information and Communications Technology

Building G, Shenzhen International Innovation Center, No.1006 Shennan Road, Futian District, Shenzhen, Guangdong, P. R. China 518000.

Tel:+86(0)755-33322000, Fax:+86(0)755-33322001

Email: yewu@caict.ac.cn. www.saict.ac.cn



REPORT HISTORY

| Report Number | Revision | Description | Issue Date |
|----------------------|-----------------|--------------------|-------------------|
| I21N03152-SAR | Rev.0 | 1st edition | 2022-01-21 |



TCONTENTS

| | |
|---|-----------|
| 1. SUMMARY OF TEST REPORT | 5 |
| 1.1. TEST ITEMS | 5 |
| 1.2. TEST STANDARDS | 5 |
| 1.3. TEST RESULT | 5 |
| 1.4. TESTING LOCATION | 5 |
| 1.5. PROJECT DATA | 5 |
| 1.6. SIGNATURE..... | 5 |
| 2. STATEMENT OF COMPLIANCE | 6 |
| 3. CLIENT INFORMATION | 8 |
| 3.1. APPLICANT INFORMATION | 8 |
| 3.2. MANUFACTURER INFORMATION | 8 |
| 4. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) | 9 |
| 4.1. ABOUT EUT | 9 |
| 4.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST | 10 |
| 4.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST | 10 |
| 5. TEST METHODOLOGY | 11 |
| 5.1. APPLICABLE LIMIT REGULATIONS | 11 |
| 5.2. APPLICABLE MEASUREMENT STANDARDS..... | 11 |
| 6. SPECIFIC ABSORPTION RATE (SAR)..... | 12 |
| 6.1. INTRODUCTION..... | 12 |
| 6.2. SAR DEFINITION | 12 |
| 7. TISSUE SIMULATING LIQUIDS | 13 |
| 7.1. TARGETS FOR TISSUE SIMULATING LIQUID | 13 |
| 7.2. DIELECTRIC PERFORMANCE | 13 |
| 8. SYSTEM VERIFICATION | 17 |
| 8.1. SYSTEM SETUP..... | 17 |
| 8.2. SYSTEM VERIFICATION..... | 18 |
| 9. MEASUREMENT PROCEDURES | 19 |
| 9.1. TESTS TO BE PERFORMED | 19 |
| 9.2. GENERAL MEASUREMENT PROCEDURE..... | 21 |
| 9.3. WCDMA MEASUREMENT PROCEDURES FOR SAR | 22 |
| 9.4. LTE MEASUREMENT PROCEDURES FOR SAR..... | 23 |
| 9.5. BLUETOOTH & WLAN MEASUREMENT PROCEDURES FOR SAR..... | 23 |
| 9.6. POWER DRIFT..... | 24 |
| 9.7. PROXIMITY SENSOR CONSIDERATIONS | 24 |
| 10. CONDUCTED OUTPUT POWER | 25 |
| 10.1. GSM MEASUREMENT RESULT | 25 |
| 10.2. WCDMA MEASUREMENT RESULT | 27 |
| 10.3. LTE MEASUREMENT RESULT | 29 |
| 10.4. BLUETOOTH AND WLAN MEASUREMENT RESULT | 85 |
| 11. SIMULTANEOUS TX SAR CONSIDERATIONS..... | 88 |



11.1. INTRODUCTION 88

11.2. TRANSMIT ANTENNA SEPARATION DISTANCES 88

11.3. SAR MEASUREMENT POSITIONS 89

11.4. STANDALONE SAR TEST EXCLUSION CONSIDERATIONS 89

12. EVALUATION OF SIMULTANEOUS.....90

13. SUMMARY OF TEST RESULTS.....91

13.1. TESTING ENVIRONMENT..... 91

13.2. SAR RESULTS 92

13.3. WLAN EVALUATION FOR 2.4G 97

13.4. WLAN EVALUATION FOR 5G 98

14. SAR MEASUREMENT VARIABILITY100

15. MEASUREMENT UNCERTAINTY101

15.1. MEASUREMENT UNCERTAINTY FOR NORMAL SAR TESTS (300MHZ~3GHZ) 101

15.2. MEASUREMENT UNCERTAINTY FOR NORMAL SAR TESTS (3GHZ~6GHZ)..... 102

16. MAIN TEST INSTRUMENTS.....103

ANNEX A: GRAPH RESULTS104

ANNEX B: SYSTEMVERIFICATION RESULTS.....116

ANNEX C: SAR MEASUREMENT SETUP.....124

C.1. MEASUREMENT SET-UP 124

C.2. DASY5 E-FIELD PROBE SYSTEM..... 125

C.3. E-FIELD PROBE CALIBRATION 126

C.4. OTHER TEST EQUIPMENT..... 127

ANNEX D: POSITION OF THE WIRELESS DEVICE IN RELATION TO THE PHANTOM.....130

D.1. GENERAL CONSIDERATIONS..... 130

D.2. BODY-WORN DEVICE 131

D.3. DESKTOP DEVICE 131

D.4. DUT SETUP PHOTOS..... 132

ANNEX E: EQUIVALENT MEDIA RECIPES133

ANNEX F: SYSTEM VALIDATION.....134

ANNEX G: DAE CALIBRATION CERTIFICATE135

ANNEX H: PROBE CALIBRATION CERTIFICATE138

ANNEX I: DIPOLE CALIBRATION CERTIFICATE169

ANNEX J: EXTENDED CALIBRATION SAR DIPOLE.....217

ANNEX K: SENSOR TRIGGERING DATA SUMMARY218



1. Summary of Test Report

1.1. Test Items

Description: ID Screen 60
Model Name: MPH-MB004A
Applicant's name: IDEMIA Identity and Security France
Manufacturer's Name: IDEMIA Identity and Security France

1.2. Test Standards

ANSI C95.1-1992, IEEE 1528-2013

1.3. Test Result

Pass. Please refer to "13. Summary of Test Results"

1.4. Testing Location

Address: Building G, Shenzhen International Innovation Center, No.1006 Shennan Road, Futian District, Shenzhen, Guangdong, P. R. China

1.5. Project Data

Testing Start Date: 2021-11-15

Testing End Date: 2021-12-20

1.6. Signature

Li Yongfu

(Prepared this test report)

Zhang Yunzhan

(Reviewed this test report)

Cao Junfei

(Approved this test report)

2. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for IDEMIA Identity and Security France ID Screen 60 MPH-MB004A are as follows:

Table 2.1: Highest Reported SAR for Body (1g)

| Exposure Configuration | Technology Band | Highest Reported SAR 1g(W/Kg) | Equipment Class |
|------------------------|-----------------|----------------------------------|-----------------|
| Body | GSM850 | 0.75 | PCT |
| | GSM1900 | 0.87 | |
| | WCDMA Band 2 | 0.76 | |
| | WCDMA Band 5 | 0.52 | |
| | LTE Band 2 | 0.71 | |
| | LTE Band 4 | 0.86 | |
| | LTE Band 5 | 0.61 | |
| | LTE Band 7 | 0.45 | |
| | LTE Band 38 | 1.05 | |
| | LTE Band 41 | 0.79 | |
| | WLAN 2.4GHz | 0.35 | DTS |
| | WLAN 5GHz | 0.49 | NII |

The SAR values found for the Mobile Phone are below the maximum recommended levels of 1.6 W/Kg as averaged over any 1g tissue according to the ANSI C95.1-1992.

The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power output.

The measurement together with the test system set-up is described in annex C of this test report. A detailed description of the equipment under test can be found in chapter 4 of this test report.

The highest reported SAR value is obtained at the case of (Table 2.1), the value is: **1.05 W/kg (1g)**.

**Table2.2: The sum of reported SAR values for WWAN antenna and WLAN antenna**

| / | Position | WWAN (W/kg) | WLAN (W/kg) | Sum (W/kg) |
|-------------------------------------|----------|----------------|----------------|---------------|
| Highest reported SAR value for Body | Rear | 1.05 | 0.46 | 1.51 |

Note: the test positions of above tables are for the worse case that has been evaluated.

Table2.3: The sum of reported SAR values for WWAN antenna and Bluetooth antenna

| / | Position | WWAN (W/kg) | Bluetooth (W/kg) | Sum (W/kg) |
|-------------------------------------|----------|----------------|---------------------|---------------|
| Highest reported SAR value for Body | Rear | 1.05 | 0.37 | 1.42 |

Note: the test positions of above tables are for the worse case that has been evaluated.

According to the above tables, the highest sum of reported SAR values is **1.51 W/kg (1g)**.

The detail for simultaneous transmission consideration is described in chapter 12.



3. Client Information

3.1. Applicant Information

| | |
|---------------|---|
| Company Name: | IDEMIA Identity and Security France |
| Address: | 2 place Samuel de Champlain, 92400 Courbevoie, FRANCE |
| City: | / |
| Country: | / |
| Telephone: | +33 1 30 20 14 34 |

3.2. Manufacturer Information

| | |
|---------------|---|
| Company Name: | IDEMIA Identity and Security France |
| Address: | 2 place Samuel de Champlain, 92400 Courbevoie, FRANCE |
| City: | / |
| Country: | / |
| Telephone: | +33 1 30 20 14 34 |

4. Equipment under Test (EUT) and Ancillary Equipment (AE)

4.1. About EUT

| | |
|-------------------------------------|---|
| Description: | ID Screen 60 |
| Model Name: | MPH-MB004A |
| Condition of EUT as received: | No obvious damage in appearance |
| Operating mode(s): | GSM850/1900, WCDMA Band2/5, LTE Band2/4/5/7/38/41, Bluetooth, WLAN 2.4G/5G |
| Condition of EUT as received: | No obvious damage in appearance |
| Tested Tx Frequency: | 824-849MHz (GSM 850) |
| | 1850-1910MHz (GSM 1900) |
| | 1850-1910MHz (WCDMA Band 2) |
| | 824-849MHz (WCDMA Band 5) |
| | 1850 -1910MHz (LTE Band 2) |
| | 1710-1755MHz (LTE Band 4) |
| | 824-849MHz (LTE Band 5) |
| | 2500-2570MHz (LTE Band 7) |
| | 2570-2620MHz (LTE Band 38) |
| | 2496-2690MHz (LTE Band 41) |
| | 2402 – 2480MHz (Bluetooth) |
| | 2412 – 2462MHz (WLAN 2.4G) |
| 5180 – 5825MHz (WLAN 5G) | |
| GPRS / EGPRS Multislot Class: | 12 |
| GPRS capability Class: | B |
| Test device Production information: | Production unit |
| Device type: | Portable device |
| Antenna type: | Integrated antenna |
| Product Dimensions: | Long 313.95mm; Wide 141.05mm; Overall Diagonal 330mm |

**4.2. Internal Identification of EUT used during the test**

| EUT ID* | IMEI | HW Version | SW Version | Receipt Date |
|---------|-----------------|------------|----------------------------|--------------|
| UT02aa | 351935780004000 | V02 | IDEMIA_WM38_V01_21 1020 | 2021-11-10 |
| UT07aa | 351935780003387 | V02 | IDEMIA_WM38_V01_21 1020 | 2021-11-10 |
| UT08aa | 351935780003387 | V02 | IDEMIA_WM38_V01_21 1020 | 2021-11-10 |

*EUT ID: is used to identify the test sample in the lab internally.

Note: It is performed to test SAR with the UT07aa & UT08aa, and conducted power with the UT02aa.

4.3. Internal Identification of AE used during the test

| AE ID* | Description | Model | Manufacturer |
|--------|-------------|-----------|-------------------------------------|
| AE1 | Battery | 293780548 | SCUD (Fujian) Electronics Co., Ltd. |

*AE ID: is used to identify the test sample in the lab internally.



5. Test Methodology

5.1. Applicable Limit Regulations

ANSI C95.1–1992 IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz

It specifies the maximum exposure limit of **1.60 W/kg** as averaged over any 1 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.

5.2. Applicable Measurement Standards

IEEE 1528–2013 Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Experimental Techniques

KDB 447498 D01 General RF Exposure Guidance v06 Mobile and Portable Devices RF Exposure Procedures and Equipment Authorization Policies

KDB 616217 D04 SAR for laptop and tablets v01r02 SAR Evaluation Considerations for Laptop, Notebook, Notebook and Tablet Computers

KDB 941225 D01 SAR test for 3G devices v03r01 SAR Measurement Procedures for 3G Devices

KDB 941225 D05 SAR for LTE Devices v02r05 SAR Evaluation Considerations for LTE Devices

KDB 248227 D01 802.11 Wi-Fi SAR v02r02 SAR Guidance for IEEE 802.11 (Wi-Fi) Transmitters

KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04 SAR Measurement Requirements for 100 MHz to 6 GHz

KDB 865664 D02 RF Exposure Reporting v01r02 RF Exposure Compliance Reporting and Documentation Considerations

TCB workshop April 2019; RF Exposure Procedures (Tissue Simulating Liquids)

6. Specific Absorption Rate (SAR)

6.1. Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

6.2. SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$SAR = c \left(\frac{\delta T}{\delta t} \right)$$

Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

7. Tissue Simulating Liquids

7.1. Targets for tissue simulating liquid

Table 7.1: Targets for tissue simulating liquid

| Frequency (MHz) | Liquid Type | Conductivity (σ) | $\pm 5\%$ Range | Permittivity (ϵ) | $\pm 5\%$ Range |
|-----------------|-------------|---------------------------|-----------------|-----------------------------|-----------------|
| 750 | Head | 0.89 | 0.85~0.93 | 41.9 | 39.8~44.0 |
| 835 | Head | 0.90 | 0.86~0.95 | 41.5 | 39.4~43.6 |
| 1750 | Head | 1.37 | 1.30~1.44 | 40.1 | 38.1~42.1 |
| 1900 | Head | 1.40 | 1.33~1.47 | 40.0 | 38.0~42.0 |
| 2450 | Head | 1.80 | 1.71~1.89 | 39.2 | 37.2~41.2 |
| 2550 | Head | 1.91 | 1.81~2.01 | 39.1 | 37.1~41.0 |
| 5250 | Head | 4.71 | 4.47~4.95 | 35.9 | 34.1~37.7 |
| 5600 | Head | 5.07 | 4.82~5.32 | 35.5 | 33.8~37.3 |
| 5750 | Head | 5.22 | 4.96~5.48 | 35.4 | 33.6~37.1 |


7.2. Dielectric Performance

Table 7.2: Dielectric Performance of Tissue Simulating Liquid


| Measurement Date (yyyy-mm-dd) | Type | Frequency | Conductivity σ (S/m) | Drift (%) | Permittivity ϵ | Drift (%) |
|-------------------------------|------|-----------|-----------------------------|-----------|-------------------------|-----------|
| 2021-11-15 | Head | 835 MHz | 0.931 | 3.44 | 40.70 | -1.93 |
| 2021-11-20 | Head | 1750 MHz | 1.372 | 0.15 | 39.98 | -0.30 |
| 2021-11-21 | Head | 1900 MHz | 1.393 | -0.50 | 39.47 | -1.33 |
| 2021-12-06 | Head | 2450 MHz | 1.860 | 3.33 | 38.67 | -1.35 |
| 2021-12-20 | Head | 2550 MHz | 1.958 | 2.51 | 38.21 | -2.28 |
| 2021-12-07 | Head | 5250 MHz | 4.680 | -0.64 | 36.76 | 2.40 |
| 2021-12-07 | Head | 5600 MHz | 5.174 | 2.05 | 35.36 | -0.39 |
| 2021-12-07 | Head | 5750 MHz | 5.341 | 2.32 | 35.03 | -1.05 |




Picture 7-1: Liquid depth in the Flat Phantom (835MHz)

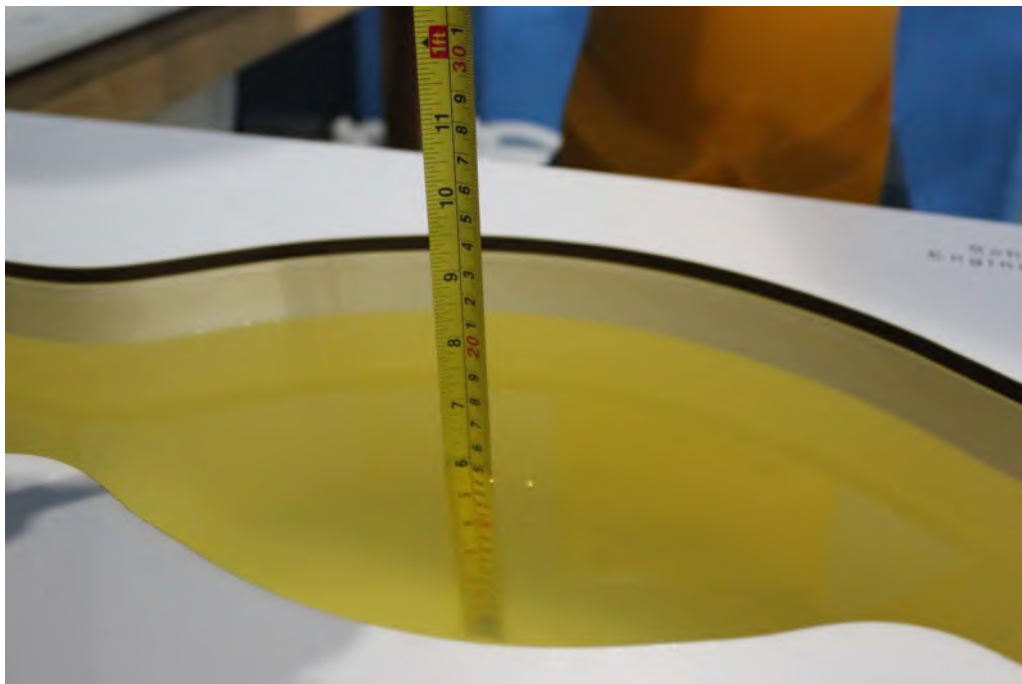


Picture 7-2: Liquid depth in the Flat Phantom (1750MHz)

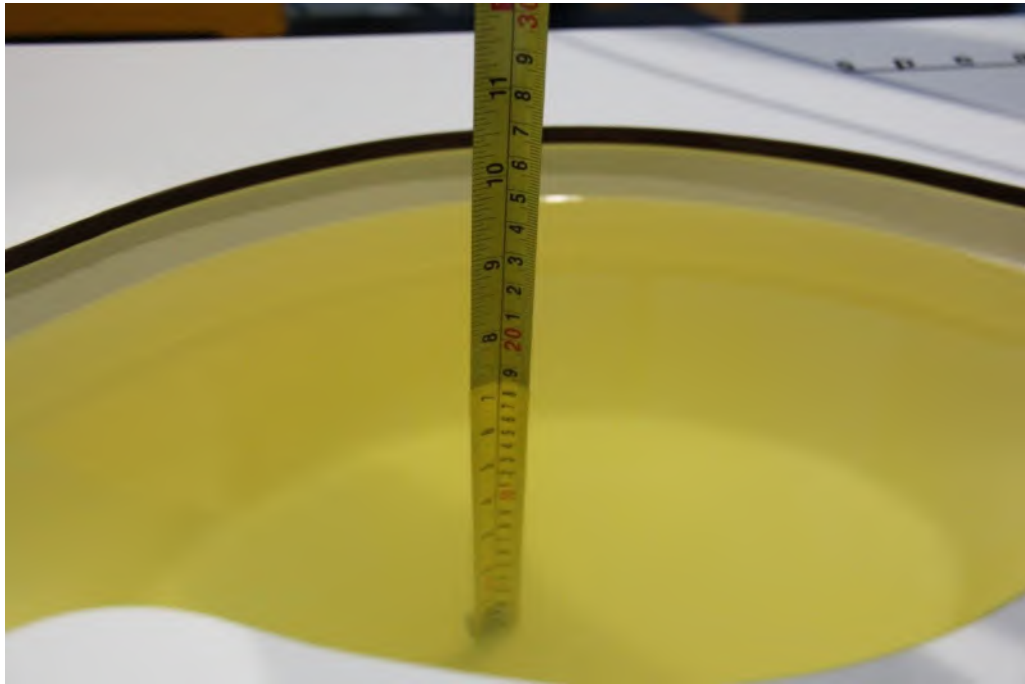

Picture 7-3: Liquid depth in the Flat Phantom (1900MHz)

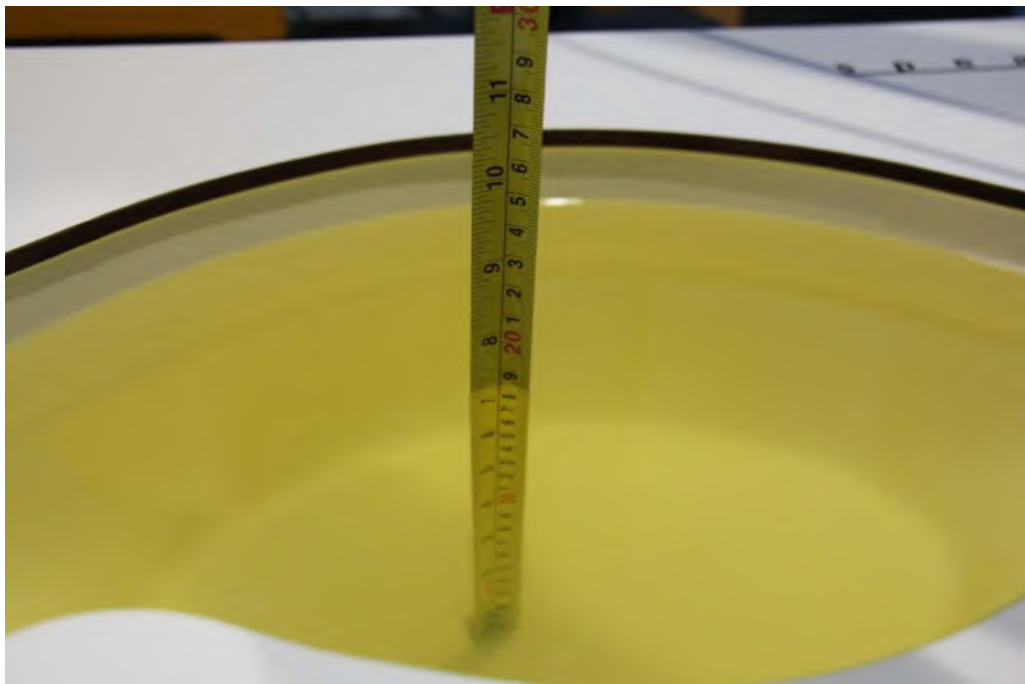

Picture 7-4: Liquid depth in the Flat Phantom(2450MHz)

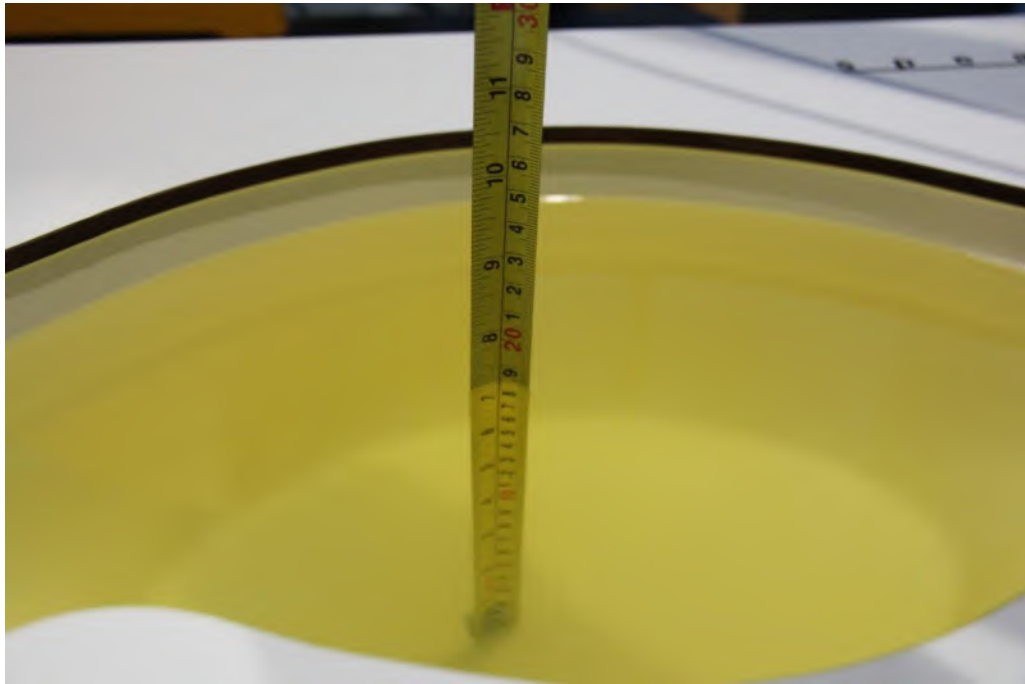

Picture 7-5: Liquid depth in the Flat Phantom(2550MHz)




Picture 7-6: Liquid depth in the Flat Phantom(5GHz)

8. System verification

8.1. System Setup

In the simplified setup for system evaluation, the DUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

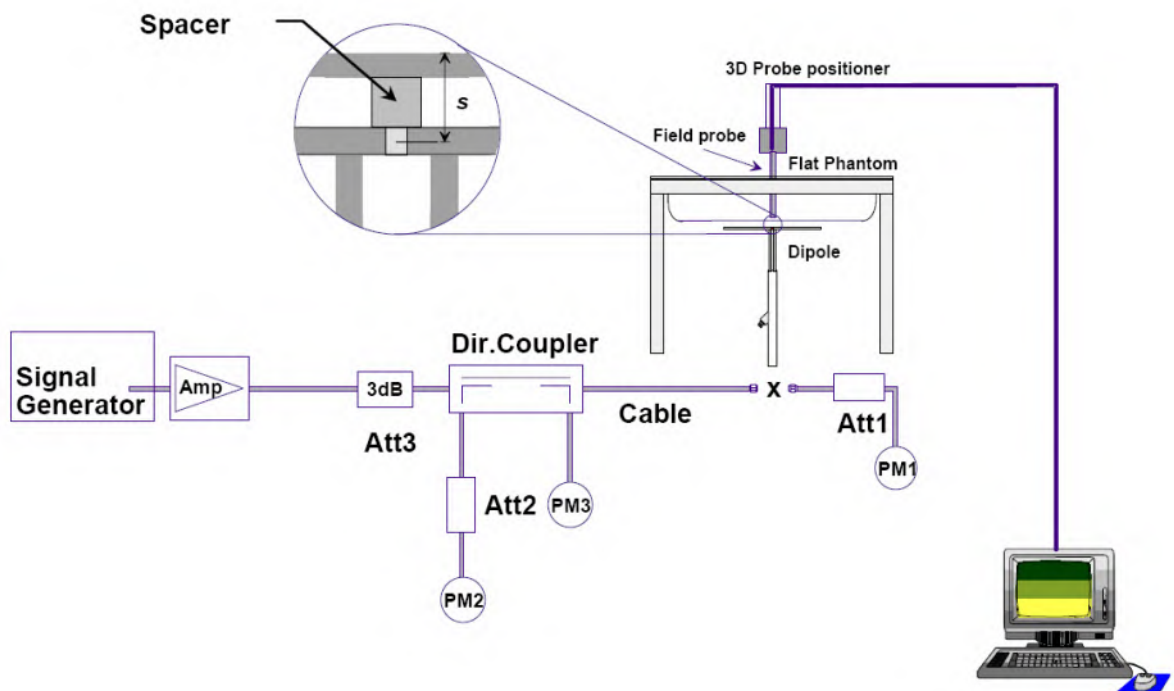

Picture 8.1 System Setup for System Evaluation

For the dipole below 3GHz, the output power on dipole port must be calibrated to 24 dBm (250mW) before dipole is connected.

For the dipole above 3GHz, the output power on dipole port must be calibrated to 20 dBm (100mW) before dipole is connected.



Picture 8.2 Photo of Dipole Setup

8.2. System Verification

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device.

Table 8.1: System Verification of Head

| Measurement Date | Frequency (MHz) | Target value (W/kg) | | Measured value (W/kg) | | | | Deviation (%) | |
|------------------|-----------------|---------------------|-------|-----------------------|-------|-----------------|-------|---------------|-------|
| | | 10 g | 1 g | / | | Normalize to 1W | | 10 g | 1 g |
| | | | | 10 g | 1 g | 10 g | 1 g | | |
| 2021-11-15 | 835 | 6.29 | 9.64 | 1.59 | 2.46 | 6.36 | 9.84 | 1.11 | 2.07 |
| 2021-11-20 | 1750 | 19.30 | 36.40 | 4.77 | 8.90 | 19.08 | 35.60 | -1.14 | -2.20 |
| 2021-11-21 | 1900 | 20.50 | 40.20 | 5.14 | 9.81 | 20.56 | 39.24 | 0.29 | -2.39 |
| 2021-12-06 | 2450 | 24.20 | 53.20 | 6.18 | 13.50 | 24.72 | 54.00 | 2.15 | 1.50 |
| 2021-12-20 | 2550 | 25.20 | 55.90 | 6.41 | 14.30 | 25.64 | 57.20 | 1.75 | 2.33 |
| 2021-12-07 | 5250 | 22.30 | 78.00 | 2.17 | 7.50 | 21.70 | 75.00 | -2.69 | -3.85 |
| 2021-12-07 | 5600 | 22.70 | 79.50 | 2.32 | 8.23 | 23.20 | 82.30 | 2.20 | 3.52 |
| 2021-12-07 | 5750 | 22.20 | 78.40 | 2.25 | 8.12 | 22.50 | 81.20 | 1.35 | 3.57 |

9. Measurement Procedures

9.1. Tests to be performed

In order to determine the highest value of the peak spatial-average SAR of a handset, all device positions, configurations and operational modes shall be tested for each frequency band according to steps 1 to 3 below. A flowchart of the test process is shown in picture 9.1.


Step 1: The tests described in 9.2 shall be performed at the channel that is closest to the center of the transmit frequency band (f_c) for:

- a) all device positions (cheek and tilt, for both left and right sides of the SAM phantom, as described in annex D),
- b) all configurations for each device position in a), e.g., antenna extended and retracted, and
- c) all operational modes, e.g., analogue and digital, for each device position in a) and configuration in b) in each frequency band.

If more than three frequencies need to be tested according to 11.1 (i.e., $N_c > 3$), then all frequencies, configurations and modes shall be tested for all of the above test conditions.

Step 2: For the condition providing highest peak spatial-average SAR determined in Step 1, perform all tests described in 9.2 at all other test frequencies, i.e., lowest and highest frequencies. In addition, for all other conditions (device position, configuration and operational mode) where the peak spatial-average SAR value determined in Step 1 is within 3 dB of the applicable SAR limit, it is recommended that all other test frequencies shall be tested as well.

Step 3: Examine all data to determine the highest value of the peak spatial-average SAR found in Steps 1 to 2.

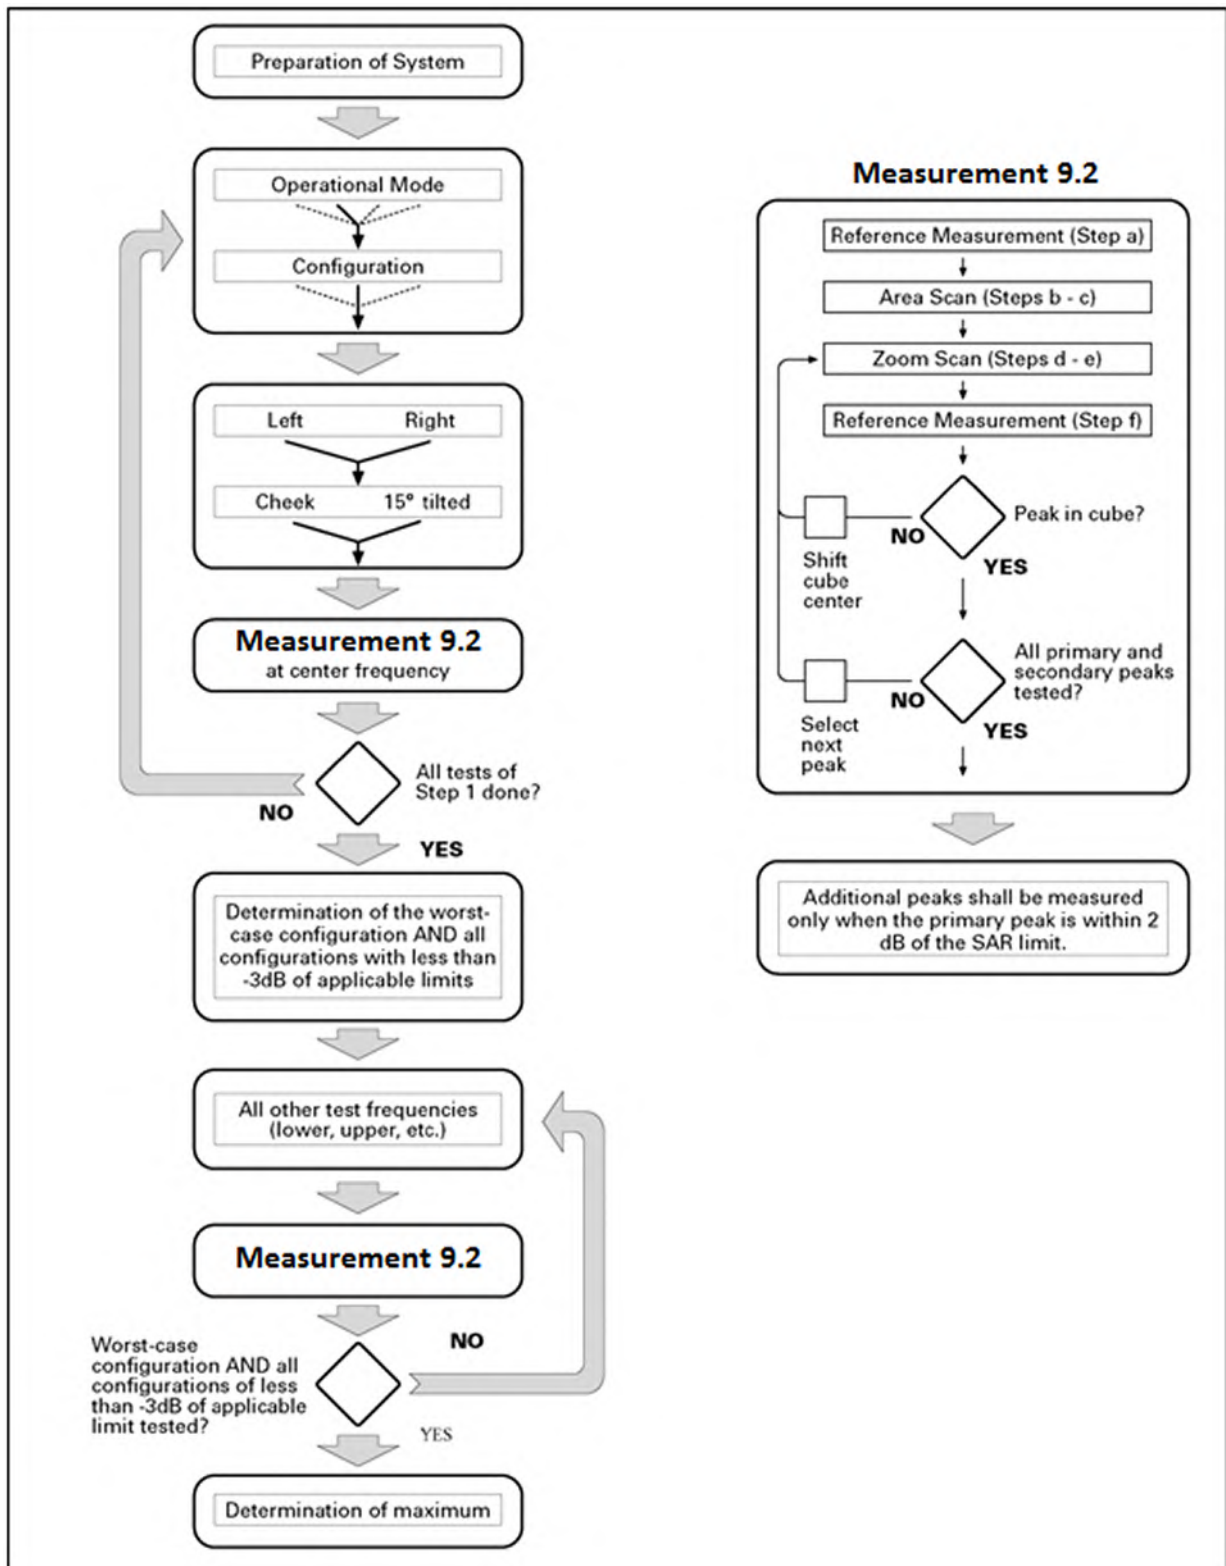

Picture 9.1 Block diagram of the tests to be performed

9.2. General Measurement Procedure

The area and zoom scan resolutions specified in the table below must be applied to the SAR measurements and fully documented in SAR reports to qualify for TCB approval. Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1-g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std 1528-2013. The results should be documented as part of the system validation records and may be requested to support test results when all the measurement parameters in the following table are not satisfied.

| | | ≤ 3 GHz | > 3 GHz | |
|---|------------------------------------|--|---|--|
| Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface | | 5 ± 1 mm | $\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm | |
| Maximum probe angle from probe axis to phantom surface normal at the measurement location | | $30^\circ \pm 1^\circ$ | $20^\circ \pm 1^\circ$ | |
| Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area} | | ≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm | 3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm | |
| | | When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device. | | |
| Maximum zoom scan spatial resolution: Δx_{Zoom} , Δy_{Zoom} | | ≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm* | 3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm* | |
| Maximum zoom scan spatial resolution, normal to phantom surface | uniform grid: $\Delta z_{Zoom}(n)$ | ≤ 5 mm | 3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm | |
| | graded grid | $\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface | ≤ 4 mm | 3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm |
| | | $\Delta z_{Zoom}(n>1)$: between subsequent points | $\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$ | |
| Minimum zoom scan volume | x, y, z | ≥ 30 mm | 3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm | |
| Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the area scan based 1-g SAR estimation procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz. | | | | |

9.3. WCDMA Measurement Procedures for SAR

The following procedures are applicable to WCDMA handsets operating under 3GPP Release99, Release 5 and Release 6. The default test configuration is to measure SAR with an established radio link between the DUT and a communication test set using a 12.2kbps RMC (reference measurement channel) configured in Test Loop Mode 1. SAR is selectively confirmed for other physical channel configurations (DPCCH & DPDCH_n), HSDPA and HSPA (HSUPA/HSDPA) modes according to output power, exposure conditions and device operating capabilities. Both uplink and downlink should be configured with the same RMC or AMR, when required. SAR for Release 5 HSDPA and Release 6 HSPA are measured using the applicable FRC (fixed reference channel) and E-DCH reference channel configurations. Maximum output power is verified according to applicable versions of 3GPP TS 34.121 and SAR must be measured according to these maximum output conditions. When Maximum Power Reduction (MPR) is not implemented according to Cubic Metric (CM) requirements for Release 6 HSPA, the following procedures do not apply.

For Release 5 HSDPA Data Devices:

| Sub-test | β_c | β_d | β_d (SF) | β_c / β_d | β_{hs} | CM/dB |
|----------|-----------|-----------|----------------|---------------------|--------------|-------|
| 1 | 2/15 | 15/15 | 64 | 2/15 | 4/15 | 0.0 |
| 2 | 12/15 | 15/15 | 64 | 12/15 | 24/25 | 1.0 |
| 3 | 15/15 | 8/15 | 64 | 15/8 | 30/15 | 1.5 |
| 4 | 15/15 | 4/15 | 64 | 15/4 | 30/15 | 1.5 |

For Release 6 HSPA Data Devices

| Sub-test | β_c | β_d | β_d (SF) | β_c / β_d | β_{hs} | β_{ec} | β_{ed} | β_{ed} (SF) | β_{ed} (codes) | CM (dB) | MPR (dB) | AG Index | E-TFCI |
|----------|-----------|-----------|----------------|---------------------|--------------|--------------|--|-------------------|----------------------|---------|----------|----------|--------|
| 1 | 11/15 | 15/15 | 64 | 11/15 | 22/15 | 209/225 | 1039/225 | 4 | 1 | 1.0 | 0.0 | 20 | 75 |
| 2 | 6/15 | 15/15 | 64 | 6/15 | 12/15 | 12/15 | 12/15 | 4 | 1 | 3.0 | 2.0 | 12 | 67 |
| 3 | 15/15 | 9/15 | 64 | 15/9 | 30/15 | 30/15 | $\beta_{ed1}:47/15$ $\beta_{ed2}:47/15$ | 4 | 2 | 2.0 | 1.0 | 15 | 92 |
| 4 | 2/15 | 15/15 | 64 | 2/15 | 4/15 | 4/15 | 56/75 | 4 | 1 | 3.0 | 2.0 | 17 | 71 |
| 5 | 15/15 | 15/15 | 64 | 15/15 | 24/15 | 30/15 | 134/15 | 4 | 1 | 1.0 | 0.0 | 21 | 81 |

9.4. LTE Measurement Procedures for SAR

SAR tests for LTE are performed with a base station simulator, Anristu MT8820C. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. All powers were measured with the Anristu MT8820C. It is performed for conducted power and SAR based on the KDB941225 D05.

SAR is evaluated separately according to the following procedures for the different test positions in each exposure condition – head, body, body-worn accessories and other use conditions. The procedures in the following subsections are applied separately to test each LTE frequency band.

1) QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.

2) QPSK with 50% RB allocation

The procedures required for 1 RB allocation in 1) are applied to measure the SAR for QPSK with 50% RB allocation.

3) QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in 1) and 2) are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

9.5. Bluetooth & WLAN Measurement Procedures for SAR

Normal network operating configurations are not suitable for measuring the SAR of 802.11 transmitters in general. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure that the results are consistent and reliable.

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in a test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. The test frequencies should correspond to actual channel frequencies defined for domestic use. SAR for devices with switched diversity should be measured with only one antenna transmitting at a time during each SAR measurement, according to a fixed modulation and data rate. The same data pattern should be used for all measurements.



9.6. Power Drift

To control the output power stability during the SAR test, DASY5 system calculates the power drift by measuring the E-field at the same location at the beginning and at the end of the measurement for each test position. These drift values can be found in Section 14 labeled as: (Power Drift [dB]). This ensures that the power drift during one measurement is within 5%.

9.7. Proximity Sensor Considerations

This device uses a proximity sensor that share the same metallic electrode as the transmitting antenna to facilitate triggering in typical user interactivity with the device. Due to the operating configurations and exposure conditions required by the device, the proximity sensor is used to indicate when the tablet is held close to a user's body exposure condition. It utilizes the proximity sensor to reduce the output power in specific wireless and operating modes to ensure SAR compliance for the following scenarios: To reduce the output power of main antennas during body operating configurations. It is also set an output power leveled to the lowest one to make sure that in any case of SAR sensor hardware failure the SAR requirements can still be satisfied.

Sensor triggering distance summary data is included in Appendix K.

10. Conducted Output Power

10.1. GSM Measurement result

During the process of testing, the EUT was controlled via Agilent Digital Radio Communication tester (E5515C) to ensure the maximum power transmission and proper modulation. This result contains conducted output power for the EUT. In all cases, the measured peak output power should be greater and within 5% than EMI measurement.

Table 10.1: The conducted power measurement results for GPRS and EGPRS

| Full Power | | | | | | | | |
|----------------------|-------------|----------------------|--------------|--------------|----------------|----------------------|--------------|--------------|
| GPRS850/ EGPRS850 | Tune up | Measured Power (dBm) | | | calculation | Average Power (dBm) | | |
| | | 251 | 190 | 128 | | 251 | 190 | 128 |
| 1Tx-slot | 33.5 | 32.49 | 32.57 | 32.60 | -9.03dB | 23.46 | 23.54 | 23.57 |
| 2Tx-slots | 32.5 | 31.88 | 31.94 | 32.00 | -6.02dB | 25.86 | 25.92 | 25.98 |
| 3Tx-slots | 31.5 | 30.32 | 30.40 | 30.44 | -4.26dB | 26.06 | 26.14 | 26.18 |
| 4Tx-slots | 30.5 | 29.30 | 29.41 | 29.43 | -3.01dB | 26.29 | 26.40 | 26.42 |
| EGPRS 850 (8PSK) | Tune up | Measured Power (dBm) | | | calculation | Measured Power (dBm) | | |
| | | 251 | 190 | 128 | | 251 | 190 | 128 |
| 1Tx-slot | 28.5 | 27.33 | 27.40 | 27.30 | -9.03dB | 18.30 | 18.37 | 18.27 |
| 2Tx-slots | 27.0 | 26.17 | 26.27 | 26.15 | -6.02dB | 20.15 | 20.25 | 20.13 |
| 3Tx-slots | 25.0 | 24.03 | 24.14 | 24.03 | -4.26dB | 19.77 | 19.88 | 19.77 |
| 4Tx-slots | 24.0 | 22.86 | 22.85 | 22.85 | -3.01dB | 19.85 | 19.84 | 19.84 |
| Sensor on | | | | | | | | |
| GPRS850/ EGPRS850 | Tune up | Measured Power (dBm) | | | calculation | Average Power (dBm) | | |
| | | 251 | 190 | 128 | | 251 | 190 | 128 |
| 1Tx-slot | 29.0 | 28.17 | 28.33 | 28.44 | -9.03dB | 19.14 | 19.30 | 19.41 |
| 2Tx-slots | 27.0 | 26.04 | 26.20 | 26.35 | -6.02dB | 20.02 | 20.18 | 20.33 |
| 3Tx-slots | 25.0 | 23.98 | 24.18 | 24.30 | -4.26dB | 19.72 | 19.92 | 20.04 |
| 4Tx-slots | 24.0 | 22.93 | 23.13 | 23.26 | -3.01dB | 19.92 | 20.12 | 20.25 |
| EGPRS 850 (8PSK) | Tune up | Measured Power (dBm) | | | calculation | Measured Power (dBm) | | |
| | | 251 | 190 | 128 | | 251 | 190 | 128 |
| 1Tx-slot | 22.5 | 21.59 | 21.52 | 21.65 | -9.03dB | 12.56 | 12.49 | 12.62 |
| 2Tx-slots | 20.5 | 19.26 | 19.21 | 19.41 | -6.02dB | 13.24 | 13.19 | 13.39 |
| 3Tx-slots | 18.0 | 17.05 | 16.91 | 17.12 | -4.26dB | 12.79 | 12.65 | 12.86 |
| 4Tx-slots | 17.0 | 15.86 | 15.76 | 15.98 | -3.01dB | 12.85 | 12.75 | 12.97 |

| Full Power | | | | | | | | |
|------------------------|-------------|----------------------|--------------|--------------|----------------|----------------------|--------------|--------------|
| GPRS1900/ EGPRS1900 | Tune up | Measured Power (dBm) | | | calculation | Average Power (dBm) | | |
| | | 810 | 661 | 512 | | 810 | 661 | 512 |
| 1Tx-slot | 30.5 | 29.68 | 29.73 | 29.81 | -9.03dB | 20.65 | 20.70 | 20.78 |
| 2Tx-slots | 30.0 | 28.95 | 29.05 | 29.15 | -6.02dB | 22.93 | 23.03 | 23.13 |
| 3Tx-slots | 28.5 | 27.20 | 27.34 | 27.51 | -4.26dB | 22.94 | 23.08 | 23.25 |
| 4Tx-slots | 27.5 | 26.09 | 26.30 | 26.50 | -3.01dB | 23.08 | 23.29 | 23.49 |
| EGPRS1900 (8PSK) | Tune up | Measured Power (dBm) | | | calculation | Measured Power (dBm) | | |
| | | 810 | 661 | 512 | | 810 | 661 | 512 |
| 1Tx-slot | 27.5 | 26.17 | 26.69 | 26.96 | -9.03dB | 17.14 | 17.66 | 17.93 |
| 2Tx-slots | 26.5 | 25.22 | 25.74 | 26.02 | -6.02dB | 19.20 | 19.72 | 20.00 |
| 3Tx-slots | 24.5 | 23.24 | 23.83 | 24.10 | -4.26dB | 18.98 | 19.57 | 19.84 |
| 4Tx-slots | 23.5 | 22.16 | 22.75 | 23.02 | -3.01dB | 19.15 | 19.74 | 20.01 |
| Sensor on | | | | | | | | |
| GPRS1900/ EGPRS1900 | Tune up | Measured Power (dBm) | | | calculation | Average Power (dBm) | | |
| | | 810 | 661 | 512 | | 810 | 661 | 512 |
| 1Tx-slot | 26.0 | 24.95 | 25.15 | 25.40 | -9.03dB | 15.92 | 16.12 | 16.37 |
| 2Tx-slots | 24.5 | 22.92 | 23.14 | 23.43 | -6.02dB | 16.90 | 17.12 | 17.41 |
| 3Tx-slots | 22.0 | 20.89 | 21.14 | 21.45 | -4.26dB | 16.63 | 16.88 | 17.19 |
| 4Tx-slots | 21.0 | 19.81 | 20.08 | 20.39 | -3.01dB | 16.80 | 17.07 | 17.38 |
| EGPRS1900 (8PSK) | Tune up | Measured Power (dBm) | | | calculation | Measured Power (dBm) | | |
| | | 810 | 661 | 512 | | 810 | 661 | 512 |
| 1Tx-slot | 22.5 | 21.26 | 21.85 | 22.10 | -9.03dB | 12.23 | 12.82 | 13.07 |
| 2Tx-slots | 20.5 | 19.22 | 19.78 | 20.04 | -6.02dB | 13.20 | 13.76 | 14.02 |
| 3Tx-slots | 18.5 | 17.09 | 17.65 | 17.85 | -4.26dB | 12.83 | 13.39 | 13.59 |
| 4Tx-slots | 17.5 | 15.94 | 16.38 | 16.75 | -3.01dB | 12.93 | 13.37 | 13.74 |

Note:

1) Division Factors

To average the power, the division factor is as follows:

1TX-slot = 1 transmit time slot out of 8 time slots=> conducted power divided by (8/1) => -9.03dB

2TX-slots = 2 transmit time slots out of 8 time slots=> conducted power divided by (8/2) => -6.02dB

3TX-slots = 3 transmit time slots out of 8 time slots=> conducted power divided by (8/3) => -4.26dB

4TX-slots = 4 transmit time slots out of 8 time slots=> conducted power divided by (8/4) => -3.01dB

According to the conducted power as above, the body measurements are performed with 4Tx-slots for GSM850 and GSM1900 Full Power mode; 2Tx-slots for GSM 850 and GSM1900 Sensor on mode.

10.2. WCDMA Measurement result

Table 10.2: T The conducted power measurement results WCDMA

| Full Power | | | | | |
|-------------------|-------|--------------|-------------------------|-----------------------|-------------------------|
| Item | band | WCDMA Band 2 | | | |
| | ARFCN | Tune up | Ch. 9538 (1907.6MHz) | Ch. 9400 (1880MHz) | Ch. 9262 (1852.4MHz) |
| WCDMA | \ | 23.5 | 22.20 | 22.20 | 22.40 |
| HSUPA | 1 | 21.5 | 20.80 | 20.80 | 20.80 |
| | 2 | 21.5 | 20.20 | 20.30 | 20.40 |
| | 3 | 22.5 | 21.20 | 21.30 | 21.40 |
| | 4 | 21.0 | 19.80 | 19.80 | 19.90 |
| | 5 | 22.5 | 21.30 | 21.30 | 21.30 |
| HSDPA | 1 | 23.0 | 22.20 | 22.20 | 22.40 |
| | 2 | 23.0 | 22.20 | 22.20 | 22.30 |
| | 3 | 23.0 | 21.70 | 21.80 | 21.80 |
| | 4 | 23.0 | 21.70 | 21.70 | 21.80 |
| Sensor on | | | | | |
| Item | band | WCDMA Band 2 | | | |
| | ARFCN | Tune up | Ch. 9538 (1907.6MHz) | Ch. 9400 (1880MHz) | Ch. 9262 (1852.4MHz) |
| WCDMA | \ | 19.0 | 18.30 | 18.30 | 18.40 |
| HSUPA | 1 | 17.5 | 16.80 | 16.70 | 16.80 |
| | 2 | 17.0 | 16.20 | 16.10 | 16.30 |
| | 3 | 18.0 | 17.20 | 17.20 | 17.30 |
| | 4 | 16.5 | 15.80 | 15.60 | 15.80 |
| | 5 | 18.0 | 17.20 | 17.20 | 17.40 |
| HSDPA | 1 | 19.0 | 18.20 | 18.30 | 18.40 |
| | 2 | 19.0 | 18.20 | 18.20 | 18.30 |
| | 3 | 19.0 | 17.70 | 17.80 | 17.90 |
| | 4 | 19.0 | 17.70 | 17.80 | 17.80 |

| Full Power | | | | | |
|-------------------|-------|--------------|------------------------|------------------------|------------------------|
| Item | band | WCDMA Band 5 | | | |
| | ARFCN | Tune up | Ch. 4233 (846.6MHz) | Ch. 4182 (836.4MHz) | Ch. 4132 (826.4MHz) |
| WCDMA | \ | 23.5 | 22.60 | 22.70 | 22.80 |
| HSUPA | 1 | 22.0 | 21.10 | 21.20 | 21.30 |
| | 2 | 21.5 | 20.60 | 20.70 | 20.90 |
| | 3 | 22.5 | 21.60 | 21.80 | 21.80 |
| | 4 | 22.0 | 20.20 | 20.20 | 20.30 |
| | 5 | 22.5 | 21.50 | 21.60 | 21.90 |
| HSDPA | 1 | 23.0 | 22.60 | 22.70 | 22.90 |
| | 2 | 23.0 | 22.70 | 22.70 | 22.80 |
| | 3 | 23.0 | 22.10 | 22.20 | 22.30 |
| | 4 | 23.0 | 22.20 | 22.20 | 22.30 |
| Sensor on | | | | | |
| Item | band | WCDMA Band 5 | | | |
| | ARFCN | Tune up | Ch. 4233 (846.6MHz) | Ch. 4182 (836.4MHz) | Ch. 4132 (826.4MHz) |
| WCDMA | \ | 20.5 | 19.50 | 19.60 | 19.70 |
| HSUPA | 1 | 19.0 | 18.00 | 18.10 | 18.20 |
| | 2 | 18.5 | 17.50 | 17.60 | 17.70 |
| | 3 | 19.5 | 18.50 | 18.60 | 18.70 |
| | 4 | 18.0 | 17.00 | 17.10 | 17.20 |
| | 5 | 19.5 | 18.40 | 18.60 | 18.60 |
| HSDPA | 1 | 20.5 | 19.50 | 19.60 | 19.70 |
| | 2 | 20.5 | 19.50 | 19.60 | 19.70 |
| | 3 | 20.5 | 19.00 | 19.10 | 19.20 |
| | 4 | 20.5 | 19.00 | 19.00 | 19.20 |

10.3. LTE Measurement result

According to April 2015 TCB workshop, SAR Test exclusion can be applied for testing overlapping LTE Bands as follows:

- The maximum out power, including tolerance, for the smaller band must be \leq the larger band to qualify for SAR test exclusion.
- The channel bandwidth and other operating parameters for the smaller band must be fully supported by the larger band.

Table 10.3: The conducted Power for LTE

| Full Power | | | | | | | | |
|-------------|--------------------|-----------|---------------------------|-------|-------|------------|-------|-------|
| LTE Band 2 | | | Actual output Power (dBm) | | | Tune up | | |
| Band -width | RB No. / RB offset | Frequency | Modulation | | | Modulation | | |
| | | | QPSK | 16QAM | 64QAM | QPSK | 16QAM | 64QAM |
| 1.4 MHz | 1RB_5 | 1909.3MHz | 23.51 | 22.65 | / | 24.5 | 23.5 | / |
| | | 1880MHz | 23.61 | 22.83 | / | 24.5 | 23.5 | / |
| | | 1850.7MHz | 23.59 | 22.83 | / | 24.5 | 23.5 | / |
| | 1RB_3 | 1909.3MHz | 23.57 | 22.89 | / | 24.5 | 23.5 | / |
| | | 1880MHz | 23.72 | 23.01 | / | 24.5 | 23.5 | / |
| | | 1850.7MHz | 23.73 | 22.96 | / | 24.5 | 23.5 | / |
| | 1RB_0 | 1909.3MHz | 23.51 | 22.71 | / | 24.5 | 23.5 | / |
| | | 1880MHz | 23.57 | 22.89 | / | 24.5 | 23.5 | / |
| | | 1850.7MHz | 23.61 | 22.88 | / | 24.5 | 23.5 | / |
| | 3RB_3 | 1909.3MHz | 23.61 | 22.55 | / | 24.5 | 23.5 | / |
| | | 1880MHz | 23.69 | 22.70 | / | 24.5 | 23.5 | / |
| | | 1850.7MHz | 23.67 | 22.77 | / | 24.5 | 23.5 | / |
| | 3RB_1 | 1909.3MHz | 23.66 | 22.61 | / | 24.5 | 23.5 | / |
| | | 1880MHz | 23.77 | 22.74 | / | 24.5 | 23.5 | / |
| | | 1850.7MHz | 23.70 | 22.78 | / | 24.5 | 23.5 | / |
| | 3RB_0 | 1909.3MHz | 23.60 | 22.57 | / | 24.5 | 23.5 | / |
| | | 1880MHz | 23.74 | 22.66 | / | 24.5 | 23.5 | / |
| | | 1850.7MHz | 23.68 | 22.72 | / | 24.5 | 23.5 | / |
| | 6RB_0 | 1909.3MHz | 22.66 | 21.72 | / | 23.5 | 22.5 | / |
| | | 1880MHz | 22.68 | 21.87 | / | 23.5 | 22.5 | / |
| | | 1850.7MHz | 22.68 | 21.82 | / | 23.5 | 22.5 | / |



| Full Power | | | | | | | | |
|-------------|--------------------|-----------|---------------------------|-------|-------|------------|-------|-------|
| LTE Band 2 | | | Actual output Power (dBm) | | | Tune up | | |
| Band -width | RB No. / RB offset | Frequency | Modulation | | | Modulation | | |
| | | | QPSK | 16QAM | 64QAM | QPSK | 16QAM | 64QAM |
| 3 MHz | 1RB_14 | 1908.5MHz | 23.49 | 22.79 | / | 24.5 | 23.5 | / |
| | | 1880MHz | 23.60 | 22.89 | / | 24.5 | 23.5 | / |
| | | 1851.5MHz | 23.58 | 22.84 | / | 24.5 | 23.5 | / |
| | 1RB_7 | 1908.5MHz | 23.66 | 22.78 | / | 24.5 | 23.5 | / |
| | | 1880MHz | 23.78 | 23.07 | / | 24.5 | 23.5 | / |
| | | 1851.5MHz | 23.70 | 22.96 | / | 24.5 | 23.5 | / |
| | 1RB_0 | 1908.5MHz | 23.47 | 22.81 | / | 24.5 | 23.5 | / |
| | | 1880MHz | 23.58 | 22.87 | / | 24.5 | 23.5 | / |
| | | 1851.5MHz | 23.59 | 22.89 | / | 24.5 | 23.5 | / |
| | 8RB_7 | 1908.5MHz | 22.52 | 21.61 | / | 23.5 | 22.5 | / |
| | | 1880MHz | 22.60 | 21.77 | / | 23.5 | 22.5 | / |
| | | 1851.5MHz | 22.64 | 21.75 | / | 23.5 | 22.5 | / |
| | 8RB_4 | 1908.5MHz | 22.59 | 21.62 | / | 23.5 | 22.5 | / |
| | | 1880MHz | 22.65 | 21.80 | / | 23.5 | 22.5 | / |
| | | 1851.5MHz | 22.64 | 21.79 | / | 23.5 | 22.5 | / |
| | 8RB_0 | 1908.5MHz | 22.56 | 21.66 | / | 23.5 | 22.5 | / |
| | | 1880MHz | 22.64 | 21.82 | / | 23.5 | 22.5 | / |
| | | 1851.5MHz | 22.64 | 21.79 | / | 23.5 | 22.5 | / |
| | 15RB_0 | 1908.5MHz | 22.56 | 21.61 | / | 23.5 | 22.5 | / |
| | | 1880MHz | 22.62 | 21.70 | / | 23.5 | 22.5 | / |
| | | 1851.5MHz | 22.62 | 21.66 | / | 23.5 | 22.5 | / |



| Full Power | | | | | | | | |
|-------------|--------------------|-----------|---------------------------|-------|-------|------------|-------|-------|
| LTE Band 2 | | | Actual output Power (dBm) | | | Tune up | | |
| Band -width | RB No. / RB offset | Frequency | Modulation | | | Modulation | | |
| | | | QPSK | 16QAM | 64QAM | QPSK | 16QAM | 64QAM |
| 5 MHz | 1RB_24 | 1907.5MHz | 23.42 | 22.61 | / | 24.5 | 23.5 | / |
| | | 1880MHz | 23.49 | 22.76 | / | 24.5 | 23.5 | / |
| | | 1852.5MHz | 23.44 | 22.76 | / | 24.5 | 23.5 | / |
| | 1RB_12 | 1907.5MHz | 23.74 | 22.99 | / | 24.5 | 23.5 | / |
| | | 1880MHz | 23.68 | 22.99 | / | 24.5 | 23.5 | / |
| | | 1852.5MHz | 23.75 | 23.06 | / | 24.5 | 23.5 | / |
| | 1RB_0 | 1907.5MHz | 23.44 | 22.67 | / | 24.5 | 23.5 | / |
| | | 1880MHz | 23.50 | 22.81 | / | 24.5 | 23.5 | / |
| | | 1852.5MHz | 23.50 | 22.83 | / | 24.5 | 23.5 | / |
| | 12RB_13 | 1907.5MHz | 22.54 | 21.51 | / | 23.5 | 22.5 | / |
| | | 1880MHz | 22.65 | 21.65 | / | 23.5 | 22.5 | / |
| | | 1852.5MHz | 22.65 | 21.67 | / | 23.5 | 22.5 | / |
| | 12RB_6 | 1907.5MHz | 22.62 | 21.57 | / | 23.5 | 22.5 | / |
| | | 1880MHz | 22.72 | 21.71 | / | 23.5 | 22.5 | / |
| | | 1852.5MHz | 22.67 | 21.70 | / | 23.5 | 22.5 | / |
| | 12RB_0 | 1907.5MHz | 22.53 | 21.57 | / | 23.5 | 22.5 | / |
| | | 1880MHz | 22.63 | 21.67 | / | 23.5 | 22.5 | / |
| | | 1852.5MHz | 22.62 | 21.64 | / | 23.5 | 22.5 | / |
| | 25RB_0 | 1907.5MHz | 22.59 | 21.59 | / | 23.5 | 22.5 | / |
| | | 1880MHz | 22.61 | 21.70 | / | 23.5 | 22.5 | / |
| | | 1852.5MHz | 22.61 | 21.69 | / | 23.5 | 22.5 | / |



| Full Power | | | | | | | | |
|-------------|--------------------|-----------|---------------------------|-------|-------|------------|-------|-------|
| LTE Band 2 | | | Actual output Power (dBm) | | | Tune up | | |
| Band -width | RB No. / RB offset | Frequency | Modulation | | | Modulation | | |
| | | | QPSK | 16QAM | 64QAM | QPSK | 16QAM | 64QAM |
| 10 MHz | 1RB_49 | 1905MHz | 23.47 | 22.75 | / | 24.5 | 23.5 | / |
| | | 1880MHz | 23.52 | 22.77 | / | 24.5 | 23.5 | / |
| | | 1855MHz | 23.55 | 22.85 | / | 24.5 | 23.5 | / |
| | 1RB_24 | 1905MHz | 23.60 | 22.96 | / | 24.5 | 23.5 | / |
| | | 1880MHz | 23.70 | 22.95 | / | 24.5 | 23.5 | / |
| | | 1855MHz | 23.70 | 22.97 | / | 24.5 | 23.5 | / |
| | 1RB_0 | 1905MHz | 23.50 | 22.81 | / | 24.5 | 23.5 | / |
| | | 1880MHz | 23.54 | 22.82 | / | 24.5 | 23.5 | / |
| | | 1855MHz | 23.59 | 22.85 | / | 24.5 | 23.5 | / |
| | 25RB_25 | 1905MHz | 22.67 | 21.67 | / | 23.5 | 22.5 | / |
| | | 1880MHz | 22.69 | 21.76 | / | 23.5 | 22.5 | / |
| | | 1855MHz | 22.70 | 21.74 | / | 23.5 | 22.5 | / |
| | 25RB_12 | 1905MHz | 22.62 | 21.69 | / | 23.5 | 22.5 | / |
| | | 1880MHz | 22.68 | 21.72 | / | 23.5 | 22.5 | / |
| | | 1855MHz | 22.67 | 21.73 | / | 23.5 | 22.5 | / |
| | 25RB_0 | 1905MHz | 22.72 | 21.78 | / | 23.5 | 22.5 | / |
| | | 1880MHz | 22.68 | 21.75 | / | 23.5 | 22.5 | / |
| | | 1855MHz | 22.63 | 21.68 | / | 23.5 | 22.5 | / |
| | 50RB_0 | 1905MHz | 22.65 | 21.67 | / | 23.5 | 22.5 | / |
| | | 1880MHz | 22.68 | 21.78 | / | 23.5 | 22.5 | / |
| | | 1855MHz | 22.63 | 21.70 | / | 23.5 | 22.5 | / |



| Full Power | | | | | | | | |
|-------------|--------------------|-----------|---------------------------|-------|-------|------------|-------|-------|
| LTE Band 2 | | | Actual output Power (dBm) | | | Tune up | | |
| Band -width | RB No. / RB offset | Frequency | Modulation | | | Modulation | | |
| | | | QPSK | 16QAM | 64QAM | QPSK | 16QAM | 64QAM |
| 15 MHz | 1RB_74 | 1902.5MHz | 23.40 | 22.67 | / | 24.5 | 23.5 | / |
| | | 1880MHz | 23.49 | 22.81 | / | 24.5 | 23.5 | / |
| | | 1857.5MHz | 23.50 | 22.79 | / | 24.5 | 23.5 | / |
| | 1RB_37 | 1902.5MHz | 23.52 | 22.75 | / | 24.5 | 23.5 | / |
| | | 1880MHz | 23.65 | 22.93 | / | 24.5 | 23.5 | / |
| | | 1857.5MHz | 23.62 | 22.91 | / | 24.5 | 23.5 | / |
| | 1RB_0 | 1902.5MHz | 23.43 | 22.75 | / | 24.5 | 23.5 | / |
| | | 1880MHz | 23.56 | 22.88 | / | 24.5 | 23.5 | / |
| | | 1857.5MHz | 23.60 | 22.83 | / | 24.5 | 23.5 | / |
| | 36RB_38 | 1902.5MHz | 22.63 | 21.59 | / | 23.5 | 22.5 | / |
| | | 1880MHz | 22.62 | 21.73 | / | 23.5 | 22.5 | / |
| | | 1857.5MHz | 22.61 | 21.65 | / | 23.5 | 22.5 | / |
| | 36RB_19 | 1902.5MHz | 22.63 | 21.69 | / | 23.5 | 22.5 | / |
| | | 1880MHz | 22.63 | 21.68 | / | 23.5 | 22.5 | / |
| | | 1857.5MHz | 22.61 | 21.63 | / | 23.5 | 22.5 | / |
| | 36RB_0 | 1902.5MHz | 22.67 | 21.67 | / | 23.5 | 22.5 | / |
| | | 1880MHz | 22.64 | 21.71 | / | 23.5 | 22.5 | / |
| | | 1857.5MHz | 22.57 | 21.65 | / | 23.5 | 22.5 | / |
| | 75RB_0 | 1902.5MHz | 22.60 | 21.66 | / | 23.5 | 22.5 | / |
| | | 1880MHz | 22.69 | 21.71 | / | 23.5 | 22.5 | / |
| | | 1857.5MHz | 22.63 | 21.68 | / | 23.5 | 22.5 | / |



| Full Power | | | | | | | | |
|-------------|--------------------|-----------|---------------------------|-------|-------|------------|-------|-------|
| LTE Band 2 | | | Actual output Power (dBm) | | | Tune up | | |
| Band -width | RB No. / RB offset | Frequency | Modulation | | | Modulation | | |
| | | | QPSK | 16QAM | 64QAM | QPSK | 16QAM | 64QAM |
| 20 MHz | 1RB_99 | 1900MHz | 23.39 | 22.64 | / | 24.5 | 23.5 | / |
| | | 1880MHz | 23.41 | 22.76 | / | 24.5 | 23.5 | / |
| | | 1860MHz | 23.37 | 22.66 | / | 24.5 | 23.5 | / |
| | 1RB_50 | 1900MHz | 23.65 | 22.93 | / | 24.5 | 23.5 | / |
| | | 1880MHz | 23.68 | 23.02 | / | 24.5 | 23.5 | / |
| | | 1860MHz | 23.66 | 22.91 | / | 24.5 | 23.5 | / |
| | 1RB_0 | 1900MHz | 23.43 | 22.72 | / | 24.5 | 23.5 | / |
| | | 1880MHz | 23.53 | 22.79 | / | 24.5 | 23.5 | / |
| | | 1860MHz | 23.50 | 22.69 | / | 24.5 | 23.5 | / |
| | 50RB_50 | 1900MHz | 22.52 | 21.56 | / | 23.5 | 22.5 | / |
| | | 1880MHz | 22.65 | 21.71 | / | 23.5 | 22.5 | / |
| | | 1860MHz | 22.57 | 21.67 | / | 23.5 | 22.5 | / |
| | 50RB_25 | 1900MHz | 22.64 | 21.66 | / | 23.5 | 22.5 | / |
| | | 1880MHz | 22.65 | 21.67 | / | 23.5 | 22.5 | / |
| | | 1860MHz | 22.66 | 21.71 | / | 23.5 | 22.5 | / |
| | 50RB_0 | 1900MHz | 22.62 | 21.66 | / | 23.5 | 22.5 | / |
| | | 1880MHz | 22.63 | 21.71 | / | 23.5 | 22.5 | / |
| | | 1860MHz | 22.55 | 21.63 | / | 23.5 | 22.5 | / |
| | 100RB_0 | 1900MHz | 22.59 | 21.61 | / | 23.5 | 22.5 | / |
| | | 1880MHz | 22.65 | 21.69 | / | 23.5 | 22.5 | / |
| | | 1860MHz | 22.59 | 21.65 | / | 23.5 | 22.5 | / |



| Sensor on | | | | | | | | |
|-------------|--------------------|-----------|---------------------------|-------|-------|------------|-------|-------|
| LTE Band 2 | | | Actual output Power (dBm) | | | Tune up | | |
| Band -width | RB No. / RB offset | Frequency | Modulation | | | Modulation | | |
| | | | QPSK | 16QAM | 64QAM | QPSK | 16QAM | 64QAM |
| 1.4 MHz | 1RB_5 | 1909.3MHz | 18.36 | 18.77 | / | 19.5 | 19.5 | / |
| | | 1880MHz | 18.31 | 18.66 | / | 19.5 | 19.5 | / |
| | | 1850.7MHz | 18.23 | 18.60 | / | 19.5 | 19.5 | / |
| | 1RB_3 | 1909.3MHz | 18.42 | 18.88 | / | 19.5 | 19.5 | / |
| | | 1880MHz | 18.44 | 18.78 | / | 19.5 | 19.5 | / |
| | | 1850.7MHz | 18.38 | 18.72 | / | 19.5 | 19.5 | / |
| | 1RB_0 | 1909.3MHz | 18.36 | 18.77 | / | 19.5 | 19.5 | / |
| | | 1880MHz | 18.32 | 18.71 | / | 19.5 | 19.5 | / |
| | | 1850.7MHz | 18.23 | 18.59 | / | 19.5 | 19.5 | / |
| | 3RB_3 | 1909.3MHz | 18.48 | 18.46 | / | 19.5 | 19.5 | / |
| | | 1880MHz | 18.44 | 18.46 | / | 19.5 | 19.5 | / |
| | | 1850.7MHz | 18.37 | 18.28 | / | 19.5 | 19.5 | / |
| | 3RB_1 | 1909.3MHz | 18.54 | 18.55 | / | 19.5 | 19.5 | / |
| | | 1880MHz | 18.52 | 18.51 | / | 19.5 | 19.5 | / |
| | | 1850.7MHz | 18.35 | 18.34 | / | 19.5 | 19.5 | / |
| | 3RB_0 | 1909.3MHz | 18.49 | 18.48 | / | 19.5 | 19.5 | / |
| | | 1880MHz | 18.38 | 18.51 | / | 19.5 | 19.5 | / |
| | | 1850.7MHz | 18.32 | 18.28 | / | 19.5 | 19.5 | / |
| | 6RB_0 | 1909.3MHz | 18.47 | 18.60 | / | 19.5 | 19.5 | / |
| | | 1880MHz | 18.41 | 18.51 | / | 19.5 | 19.5 | / |
| | | 1850.7MHz | 18.35 | 18.42 | / | 19.5 | 19.5 | / |



| Sensor on | | | | | | | | |
|-------------|--------------------|-----------|---------------------------|-------|-------|------------|-------|-------|
| LTE Band 2 | | | Actual output Power (dBm) | | | Tune up | | |
| Band -width | RB No. / RB offset | Frequency | Modulation | | | Modulation | | |
| | | | QPSK | 16QAM | 64QAM | QPSK | 16QAM | 64QAM |
| 3 MHz | 1RB_14 | 1908.5MHz | 18.40 | 18.73 | / | 19.5 | 19.5 | / |
| | | 1880MHz | 18.39 | 18.73 | / | 19.5 | 19.5 | / |
| | | 1851.5MHz | 18.31 | 18.66 | / | 19.5 | 19.5 | / |
| | 1RB_7 | 1908.5MHz | 18.49 | 18.80 | / | 19.5 | 19.5 | / |
| | | 1880MHz | 18.50 | 18.87 | / | 19.5 | 19.5 | / |
| | | 1851.5MHz | 18.32 | 18.86 | / | 19.5 | 19.5 | / |
| | 1RB_0 | 1908.5MHz | 18.41 | 18.72 | / | 19.5 | 19.5 | / |
| | | 1880MHz | 18.40 | 18.75 | / | 19.5 | 19.5 | / |
| | | 1851.5MHz | 18.28 | 18.77 | / | 19.5 | 19.5 | / |
| | 8RB_7 | 1908.5MHz | 18.46 | 18.54 | / | 19.5 | 19.5 | / |
| | | 1880MHz | 18.37 | 18.47 | / | 19.5 | 19.5 | / |
| | | 1851.5MHz | 18.34 | 18.41 | / | 19.5 | 19.5 | / |
| | 8RB_4 | 1908.5MHz | 18.43 | 18.59 | / | 19.5 | 19.5 | / |
| | | 1880MHz | 18.42 | 18.54 | / | 19.5 | 19.5 | / |
| | | 1851.5MHz | 18.36 | 18.40 | / | 19.5 | 19.5 | / |
| | 8RB_0 | 1908.5MHz | 18.44 | 18.52 | / | 19.5 | 19.5 | / |
| | | 1880MHz | 18.39 | 18.48 | / | 19.5 | 19.5 | / |
| | | 1851.5MHz | 18.33 | 18.35 | / | 19.5 | 19.5 | / |
| | 15RB_0 | 1908.5MHz | 18.43 | 18.48 | / | 19.5 | 19.5 | / |
| | | 1880MHz | 18.39 | 18.37 | / | 19.5 | 19.5 | / |
| | | 1851.5MHz | 18.29 | 18.34 | / | 19.5 | 19.5 | / |



| Sensor on | | | | | | | | |
|-------------|--------------------|-----------|---------------------------|-------|-------|------------|-------|-------|
| LTE Band 2 | | | Actual output Power (dBm) | | | Tune up | | |
| Band -width | RB No. / RB offset | Frequency | Modulation | | | Modulation | | |
| | | | QPSK | 16QAM | 64QAM | QPSK | 16QAM | 64QAM |
| 5 MHz | 1RB_24 | 1907.5MHz | 18.28 | 18.59 | / | 19.5 | 19.5 | / |
| | | 1880MHz | 18.27 | 18.57 | / | 19.5 | 19.5 | / |
| | | 1852.5MHz | 18.18 | 18.51 | / | 19.5 | 19.5 | / |
| | 1RB_12 | 1907.5MHz | 18.60 | 18.77 | / | 19.5 | 19.5 | / |
| | | 1880MHz | 18.55 | 18.83 | / | 19.5 | 19.5 | / |
| | | 1852.5MHz | 18.41 | 18.73 | / | 19.5 | 19.5 | / |
| | 1RB_0 | 1907.5MHz | 18.29 | 18.57 | / | 19.5 | 19.5 | / |
| | | 1880MHz | 18.32 | 18.62 | / | 19.5 | 19.5 | / |
| | | 1852.5MHz | 18.21 | 18.52 | / | 19.5 | 19.5 | / |
| | 12RB_13 | 1907.5MHz | 18.47 | 18.49 | / | 19.5 | 19.5 | / |
| | | 1880MHz | 18.43 | 18.43 | / | 19.5 | 19.5 | / |
| | | 1852.5MHz | 18.36 | 18.33 | / | 19.5 | 19.5 | / |
| | 12RB_6 | 1907.5MHz | 18.50 | 18.50 | / | 19.5 | 19.5 | / |
| | | 1880MHz | 18.50 | 18.50 | / | 19.5 | 19.5 | / |
| | | 1852.5MHz | 18.35 | 18.35 | / | 19.5 | 19.5 | / |
| | 12RB_0 | 1907.5MHz | 18.42 | 18.42 | / | 19.5 | 19.5 | / |
| | | 1880MHz | 18.40 | 18.43 | / | 19.5 | 19.5 | / |
| | | 1852.5MHz | 18.31 | 18.29 | / | 19.5 | 19.5 | / |
| | 25RB_0 | 1907.5MHz | 18.45 | 18.40 | / | 19.5 | 19.5 | / |
| | | 1880MHz | 18.42 | 18.45 | / | 19.5 | 19.5 | / |
| | | 1852.5MHz | 18.35 | 18.33 | / | 19.5 | 19.5 | / |



| Sensor on | | | | | | | | |
|-------------|--------------------|-----------|---------------------------|-------|-------|------------|-------|-------|
| LTE Band 2 | | | Actual output Power (dBm) | | | Tune up | | |
| Band -width | RB No. / RB offset | Frequency | Modulation | | | Modulation | | |
| | | | QPSK | 16QAM | 64QAM | QPSK | 16QAM | 64QAM |
| 10 MHz | 1RB_49 | 1905MHz | 18.44 | 18.73 | / | 19.5 | 19.5 | / |
| | | 1880MHz | 18.38 | 18.80 | / | 19.5 | 19.5 | / |
| | | 1855MHz | 18.29 | 18.61 | / | 19.5 | 19.5 | / |
| | 1RB_24 | 1905MHz | 18.55 | 18.80 | / | 19.5 | 19.5 | / |
| | | 1880MHz | 18.47 | 18.93 | / | 19.5 | 19.5 | / |
| | | 1855MHz | 18.44 | 18.78 | / | 19.5 | 19.5 | / |
| | 1RB_0 | 1905MHz | 18.43 | 18.84 | / | 19.5 | 19.5 | / |
| | | 1880MHz | 18.43 | 18.84 | / | 19.5 | 19.5 | / |
| | | 1855MHz | 18.30 | 18.69 | / | 19.5 | 19.5 | / |
| | 25RB_25 | 1905MHz | 18.47 | 18.51 | / | 19.5 | 19.5 | / |
| | | 1880MHz | 18.51 | 18.55 | / | 19.5 | 19.5 | / |
| | | 1855MHz | 18.40 | 18.44 | / | 19.5 | 19.5 | / |
| | 25RB_12 | 1905MHz | 18.52 | 18.53 | / | 19.5 | 19.5 | / |
| | | 1880MHz | 18.48 | 18.49 | / | 19.5 | 19.5 | / |
| | | 1855MHz | 18.38 | 18.39 | / | 19.5 | 19.5 | / |
| | 25RB_0 | 1905MHz | 18.58 | 18.57 | / | 19.5 | 19.5 | / |
| | | 1880MHz | 18.47 | 18.45 | / | 19.5 | 19.5 | / |
| | | 1855MHz | 18.36 | 18.39 | / | 19.5 | 19.5 | / |
| | 50RB_0 | 1905MHz | 18.54 | 18.52 | / | 19.5 | 19.5 | / |
| | | 1880MHz | 18.45 | 18.51 | / | 19.5 | 19.5 | / |
| | | 1855MHz | 18.40 | 18.38 | / | 19.5 | 19.5 | / |



| Sensor on | | | | | | | | |
|-------------|--------------------|-----------|---------------------------|-------|-------|------------|-------|-------|
| LTE Band 2 | | | Actual output Power (dBm) | | | Tune up | | |
| Band -width | RB No. / RB offset | Frequency | Modulation | | | Modulation | | |
| | | | QPSK | 16QAM | 64QAM | QPSK | 16QAM | 64QAM |
| 15 MHz | 1RB_74 | 1902.5MHz | 18.35 | 18.77 | / | 19.5 | 19.5 | / |
| | | 1880MHz | 18.31 | 18.77 | / | 19.5 | 19.5 | / |
| | | 1857.5MHz | 18.25 | 18.67 | / | 19.5 | 19.5 | / |
| | 1RB_37 | 1902.5MHz | 18.45 | 18.89 | / | 19.5 | 19.5 | / |
| | | 1880MHz | 18.44 | 18.82 | / | 19.5 | 19.5 | / |
| | | 1857.5MHz | 18.28 | 18.71 | / | 19.5 | 19.5 | / |
| | 1RB_0 | 1902.5MHz | 18.38 | 18.83 | / | 19.5 | 19.5 | / |
| | | 1880MHz | 18.35 | 18.70 | / | 19.5 | 19.5 | / |
| | | 1857.5MHz | 18.30 | 18.67 | / | 19.5 | 19.5 | / |
| | 36RB_38 | 1902.5MHz | 18.46 | 18.44 | / | 19.5 | 19.5 | / |
| | | 1880MHz | 18.49 | 18.48 | / | 19.5 | 19.5 | / |
| | | 1857.5MHz | 18.35 | 18.39 | / | 19.5 | 19.5 | / |
| | 36RB_19 | 1902.5MHz | 18.50 | 18.51 | / | 19.5 | 19.5 | / |
| | | 1880MHz | 18.44 | 18.44 | / | 19.5 | 19.5 | / |
| | | 1857.5MHz | 18.37 | 18.35 | / | 19.5 | 19.5 | / |
| | 36RB_0 | 1902.5MHz | 18.51 | 18.53 | / | 19.5 | 19.5 | / |
| | | 1880MHz | 18.44 | 18.45 | / | 19.5 | 19.5 | / |
| | | 1857.5MHz | 18.33 | 18.34 | / | 19.5 | 19.5 | / |
| | 75RB_0 | 1902.5MHz | 18.52 | 18.52 | / | 19.5 | 19.5 | / |
| | | 1880MHz | 18.43 | 18.44 | / | 19.5 | 19.5 | / |
| | | 1857.5MHz | 18.34 | 18.38 | / | 19.5 | 19.5 | / |



| Sensor on | | | | | | | | |
|-------------|--------------------|-----------|---------------------------|-------|-------|------------|-------|-------|
| LTE Band 2 | | | Actual output Power (dBm) | | | Tune up | | |
| Band -width | RB No. / RB offset | Frequency | Modulation | | | Modulation | | |
| | | | QPSK | 16QAM | 64QAM | QPSK | 16QAM | 64QAM |
| 20 MHz | 1RB_99 | 1900MHz | 18.26 | 18.64 | / | 19.5 | 19.5 | / |
| | | 1880MHz | 18.20 | 18.49 | / | 19.5 | 19.5 | / |
| | | 1860MHz | 18.18 | 18.51 | / | 19.5 | 19.5 | / |
| | 1RB_50 | 1900MHz | 18.50 | 18.84 | / | 19.5 | 19.5 | / |
| | | 1880MHz | 18.47 | 18.75 | / | 19.5 | 19.5 | / |
| | | 1860MHz | 18.41 | 18.71 | / | 19.5 | 19.5 | / |
| | 1RB_0 | 1900MHz | 18.32 | 18.64 | / | 19.5 | 19.5 | / |
| | | 1880MHz | 18.25 | 18.58 | / | 19.5 | 19.5 | / |
| | | 1860MHz | 18.24 | 18.61 | / | 19.5 | 19.5 | / |
| | 50RB_50 | 1900MHz | 18.40 | 18.41 | / | 19.5 | 19.5 | / |
| | | 1880MHz | 18.48 | 18.51 | / | 19.5 | 19.5 | / |
| | | 1860MHz | 18.31 | 18.34 | / | 19.5 | 19.5 | / |
| | 50RB_25 | 1900MHz | 18.54 | 18.49 | / | 19.5 | 19.5 | / |
| | | 1880MHz | 18.44 | 18.44 | / | 19.5 | 19.5 | / |
| | | 1860MHz | 18.36 | 18.36 | / | 19.5 | 19.5 | / |
| | 50RB_0 | 1900MHz | 18.49 | 18.48 | / | 19.5 | 19.5 | / |
| | | 1880MHz | 18.39 | 18.39 | / | 19.5 | 19.5 | / |
| | | 1860MHz | 18.26 | 18.28 | / | 19.5 | 19.5 | / |
| | 100RB_0 | 1900MHz | 18.46 | 18.51 | / | 19.5 | 19.5 | / |
| | | 1880MHz | 18.42 | 18.45 | / | 19.5 | 19.5 | / |
| | | 1860MHz | 18.32 | 18.30 | / | 19.5 | 19.5 | / |



| Full Power | | | | | | | | |
|-------------|--------------------|-----------------|---------------------------|-------|-------|------------|-------|-------|
| LTE Band 4 | | | Actual output Power (dBm) | | | Tune up | | |
| Band -width | RB No. / RB offset | Frequency (MHz) | Modulation | | | Modulation | | |
| | | | QPSK | 16QAM | 64QAM | QPSK | 16QAM | 64QAM |
| 1.4 MHz | 1RB_5 | 1754.3 | 23.45 | 22.57 | / | 24.5 | 23.5 | / |
| | | 1732.5 | 23.41 | 22.78 | / | 24.5 | 23.5 | / |
| | | 1710.7 | 23.34 | 22.66 | / | 24.5 | 23.5 | / |
| | 1RB_3 | 1754.3 | 23.55 | 22.71 | / | 24.5 | 23.5 | / |
| | | 1732.5 | 23.53 | 22.93 | / | 24.5 | 23.5 | / |
| | | 1710.7 | 23.42 | 22.86 | / | 24.5 | 23.5 | / |
| | 1RB_0 | 1754.3 | 23.43 | 22.59 | / | 24.5 | 23.5 | / |
| | | 1732.5 | 23.39 | 22.79 | / | 24.5 | 23.5 | / |
| | | 1710.7 | 23.35 | 22.72 | / | 24.5 | 23.5 | / |
| | 3RB_3 | 1754.3 | 23.55 | 22.50 | / | 24.5 | 23.5 | / |
| | | 1732.5 | 23.49 | 22.56 | / | 24.5 | 23.5 | / |
| | | 1710.7 | 23.46 | 22.50 | / | 24.5 | 23.5 | / |
| | 3RB_1 | 1754.3 | 23.60 | 22.53 | / | 24.5 | 23.5 | / |
| | | 1732.5 | 23.56 | 22.63 | / | 24.5 | 23.5 | / |
| | | 1710.7 | 23.45 | 22.53 | / | 24.5 | 23.5 | / |
| | 3RB_0 | 1754.3 | 23.52 | 22.49 | / | 24.5 | 23.5 | / |
| | | 1732.5 | 23.49 | 22.56 | / | 24.5 | 23.5 | / |
| | | 1710.7 | 23.45 | 22.45 | / | 24.5 | 23.5 | / |
| | 6RB_0 | 1754.3 | 22.56 | 21.69 | / | 23.5 | 22.5 | / |
| | | 1732.5 | 22.56 | 21.67 | / | 23.5 | 22.5 | / |
| | | 1710.7 | 22.53 | 21.58 | / | 23.5 | 22.5 | / |



| Full Power | | | | | | | | |
|-------------|--------------------|-----------------|---------------------------|-------|-------|------------|-------|-------|
| LTE Band 4 | | | Actual output Power (dBm) | | | Tune up | | |
| Band -width | RB No. / RB offset | Frequency (MHz) | Modulation | | | Modulation | | |
| | | | QPSK | 16QAM | 64QAM | QPSK | 16QAM | 64QAM |
| 3 MHz | 1RB_14 | 1753.5 | 23.51 | 22.67 | / | 24.5 | 23.5 | / |
| | | 1732.5 | 23.45 | 22.83 | / | 24.5 | 23.5 | / |
| | | 1711.5 | 23.45 | 22.86 | / | 24.5 | 23.5 | / |
| | 1RB_7 | 1753.5 | 23.70 | 22.91 | / | 24.5 | 23.5 | / |
| | | 1732.5 | 23.57 | 22.99 | / | 24.5 | 23.5 | / |
| | | 1711.5 | 23.56 | 22.94 | / | 24.5 | 23.5 | / |
| | 1RB_0 | 1753.5 | 23.52 | 22.74 | / | 24.5 | 23.5 | / |
| | | 1732.5 | 23.48 | 22.86 | / | 24.5 | 23.5 | / |
| | | 1711.5 | 23.46 | 22.86 | / | 24.5 | 23.5 | / |
| | 8RB_7 | 1753.5 | 22.51 | 21.64 | / | 23.5 | 22.5 | / |
| | | 1732.5 | 22.56 | 21.58 | / | 23.5 | 22.5 | / |
| | | 1711.5 | 22.50 | 21.56 | / | 23.5 | 22.5 | / |
| | 8RB_4 | 1753.5 | 22.58 | 21.72 | / | 23.5 | 22.5 | / |
| | | 1732.5 | 22.58 | 21.65 | / | 23.5 | 22.5 | / |
| | | 1711.5 | 22.53 | 21.55 | / | 23.5 | 22.5 | / |
| | 8RB_0 | 1753.5 | 22.55 | 21.65 | / | 23.5 | 22.5 | / |
| | | 1732.5 | 22.54 | 21.65 | / | 23.5 | 22.5 | / |
| | | 1711.5 | 22.49 | 21.55 | / | 23.5 | 22.5 | / |
| | 15RB_0 | 1753.5 | 22.55 | 21.54 | / | 23.5 | 22.5 | / |
| | | 1732.5 | 22.54 | 21.56 | / | 23.5 | 22.5 | / |
| | | 1711.5 | 22.50 | 21.49 | / | 23.5 | 22.5 | / |



| Full Power | | | | | | | | |
|-------------|--------------------|-----------------|---------------------------|-------|-------|------------|-------|-------|
| LTE Band 4 | | | Actual output Power (dBm) | | | Tune up | | |
| Band -width | RB No. / RB offset | Frequency (MHz) | Modulation | | | Modulation | | |
| | | | QPSK | 16QAM | 64QAM | QPSK | 16QAM | 64QAM |
| 5 MHz | 1RB_24 | 1752.5 | 23.36 | 22.52 | / | 24.5 | 23.5 | / |
| | | 1732.5 | 23.36 | 22.64 | / | 24.5 | 23.5 | / |
| | | 1712.5 | 23.31 | 22.59 | / | 24.5 | 23.5 | / |
| | 1RB_12 | 1752.5 | 23.62 | 22.81 | / | 24.5 | 23.5 | / |
| | | 1732.5 | 23.57 | 22.90 | / | 24.5 | 23.5 | / |
| | | 1712.5 | 23.58 | 22.81 | / | 24.5 | 23.5 | / |
| | 1RB_0 | 1752.5 | 23.41 | 22.58 | / | 24.5 | 23.5 | / |
| | | 1732.5 | 23.37 | 22.61 | / | 24.5 | 23.5 | / |
| | | 1712.5 | 23.32 | 22.57 | / | 24.5 | 23.5 | / |
| | 12RB_13 | 1752.5 | 22.47 | 21.49 | / | 23.5 | 22.5 | / |
| | | 1732.5 | 22.54 | 21.56 | / | 23.5 | 22.5 | / |
| | | 1712.5 | 22.51 | 21.51 | / | 23.5 | 22.5 | / |
| | 12RB_6 | 1752.5 | 22.59 | 21.60 | / | 23.5 | 22.5 | / |
| | | 1732.5 | 22.60 | 21.61 | / | 23.5 | 22.5 | / |
| | | 1712.5 | 22.55 | 21.51 | / | 23.5 | 22.5 | / |
| | 12RB_0 | 1752.5 | 22.55 | 21.58 | / | 23.5 | 22.5 | / |
| | | 1732.5 | 22.53 | 21.52 | / | 23.5 | 22.5 | / |
| | | 1712.5 | 22.47 | 21.43 | / | 23.5 | 22.5 | / |
| | 25RB_0 | 1752.5 | 22.54 | 21.60 | / | 23.5 | 22.5 | / |
| | | 1732.5 | 22.51 | 21.56 | / | 23.5 | 22.5 | / |
| | | 1712.5 | 22.47 | 21.49 | / | 23.5 | 22.5 | / |



| Full Power | | | | | | | | |
|-------------|--------------------|-----------------|---------------------------|-------|-------|------------|-------|-------|
| LTE Band 4 | | | Actual output Power (dBm) | | | Tune up | | |
| Band -width | RB No. / RB offset | Frequency (MHz) | Modulation | | | Modulation | | |
| | | | QPSK | 16QAM | 64QAM | QPSK | 16QAM | 64QAM |
| 10 MHz | 1RB_49 | 1750.0 | 23.46 | 22.65 | / | 24.5 | 23.5 | / |
| | | 1732.5 | 23.44 | 22.72 | / | 24.5 | 23.5 | / |
| | | 1715.0 | 23.37 | 22.74 | / | 24.5 | 23.5 | / |
| | 1RB_24 | 1750.0 | 23.61 | 22.82 | / | 24.5 | 23.5 | / |
| | | 1732.5 | 23.54 | 22.99 | / | 24.5 | 23.5 | / |
| | | 1715.0 | 23.53 | 22.90 | / | 24.5 | 23.5 | / |
| | 1RB_0 | 1750.0 | 23.52 | 22.73 | / | 24.5 | 23.5 | / |
| | | 1732.5 | 23.47 | 22.83 | / | 24.5 | 23.5 | / |
| | | 1715.0 | 23.41 | 22.78 | / | 24.5 | 23.5 | / |
| | 25RB_25 | 1750.0 | 22.54 | 21.57 | / | 23.5 | 22.5 | / |
| | | 1732.5 | 22.59 | 21.57 | / | 23.5 | 22.5 | / |
| | | 1715.0 | 22.54 | 21.60 | / | 23.5 | 22.5 | / |
| | 25RB_12 | 1750.0 | 22.63 | 21.64 | / | 23.5 | 22.5 | / |
| | | 1732.5 | 22.56 | 21.59 | / | 23.5 | 22.5 | / |
| | | 1715.0 | 22.57 | 21.56 | / | 23.5 | 22.5 | / |
| | 25RB_0 | 1750.0 | 22.63 | 21.65 | / | 23.5 | 22.5 | / |
| | | 1732.5 | 22.60 | 21.63 | / | 23.5 | 22.5 | / |
| | | 1715.0 | 22.49 | 21.51 | / | 23.5 | 22.5 | / |
| | 50RB_0 | 1750.0 | 22.59 | 21.59 | / | 23.5 | 22.5 | / |
| | | 1732.5 | 22.57 | 21.59 | / | 23.5 | 22.5 | / |
| | | 1715.0 | 22.54 | 21.56 | / | 23.5 | 22.5 | / |



| Full Power | | | | | | | | |
|-------------|--------------------|-----------------|---------------------------|-------|-------|------------|-------|-------|
| LTE Band 4 | | | Actual output Power (dBm) | | | Tune up | | |
| Band -width | RB No. / RB offset | Frequency (MHz) | Modulation | | | Modulation | | |
| | | | QPSK | 16QAM | 64QAM | QPSK | 16QAM | 64QAM |
| 15 MHz | 1RB_74 | 1747.5 | 23.37 | 22.70 | / | 24.5 | 23.5 | / |
| | | 1732.5 | 23.35 | 22.72 | / | 24.5 | 23.5 | / |
| | | 1717.5 | 23.31 | 22.70 | / | 24.5 | 23.5 | / |
| | 1RB_37 | 1747.5 | 23.52 | 22.82 | / | 24.5 | 23.5 | / |
| | | 1732.5 | 23.48 | 22.86 | / | 24.5 | 23.5 | / |
| | | 1717.5 | 23.40 | 22.79 | / | 24.5 | 23.5 | / |
| | 1RB_0 | 1747.5 | 23.49 | 22.85 | / | 24.5 | 23.5 | / |
| | | 1732.5 | 23.40 | 22.75 | / | 24.5 | 23.5 | / |
| | | 1717.5 | 23.37 | 22.70 | / | 24.5 | 23.5 | / |
| | 36RB_38 | 1747.5 | 22.53 | 21.52 | / | 23.5 | 22.5 | / |
| | | 1732.5 | 22.53 | 21.54 | / | 23.5 | 22.5 | / |
| | | 1717.5 | 22.49 | 21.54 | / | 23.5 | 22.5 | / |
| | 36RB_19 | 1747.5 | 22.59 | 21.62 | / | 23.5 | 22.5 | / |
| | | 1732.5 | 22.58 | 21.55 | / | 23.5 | 22.5 | / |
| | | 1717.5 | 22.52 | 21.54 | / | 23.5 | 22.5 | / |
| | 36RB_0 | 1747.5 | 22.62 | 21.56 | / | 23.5 | 22.5 | / |
| | | 1732.5 | 22.56 | 21.52 | / | 23.5 | 22.5 | / |
| | | 1717.5 | 22.54 | 21.49 | / | 23.5 | 22.5 | / |
| | 75RB_0 | 1747.5 | 22.56 | 21.60 | / | 23.5 | 22.5 | / |
| | | 1732.5 | 22.57 | 21.55 | / | 23.5 | 22.5 | / |
| | | 1717.5 | 22.51 | 21.48 | / | 23.5 | 22.5 | / |



| Full Power | | | | | | | | |
|-------------|--------------------|-----------------|---------------------------|-------|-------|------------|-------|-------|
| LTE Band 4 | | | Actual output Power (dBm) | | | Tune up | | |
| Band -width | RB No. / RB offset | Frequency (MHz) | Modulation | | | Modulation | | |
| | | | QPSK | 16QAM | 64QAM | QPSK | 16QAM | 64QAM |
| 20 MHz | 1RB_99 | 1745.0 | 23.32 | 22.51 | / | 24.5 | 23.5 | / |
| | | 1732.5 | 23.32 | 22.63 | / | 24.5 | 23.5 | / |
| | | 1720.0 | 23.26 | 22.63 | / | 24.5 | 23.5 | / |
| | 1RB_50 | 1745.0 | 23.57 | 22.84 | / | 24.5 | 23.5 | / |
| | | 1732.5 | 23.54 | 22.83 | / | 24.5 | 23.5 | / |
| | | 1720.0 | 23.53 | 22.79 | / | 24.5 | 23.5 | / |
| | 1RB_0 | 1745.0 | 23.37 | 22.68 | / | 24.5 | 23.5 | / |
| | | 1732.5 | 23.34 | 22.68 | / | 24.5 | 23.5 | / |
| | | 1720.0 | 23.31 | 22.65 | / | 24.5 | 23.5 | / |
| | 50RB_50 | 1745.0 | 22.48 | 21.50 | / | 23.5 | 22.5 | / |
| | | 1732.5 | 22.54 | 21.53 | / | 23.5 | 22.5 | / |
| | | 1720.0 | 22.50 | 21.50 | / | 23.5 | 22.5 | / |
| | 50RB_25 | 1745.0 | 22.61 | 21.59 | / | 23.5 | 22.5 | / |
| | | 1732.5 | 22.54 | 21.52 | / | 23.5 | 22.5 | / |
| | | 1720.0 | 22.58 | 21.57 | / | 23.5 | 22.5 | / |
| | 50RB_0 | 1745.0 | 22.59 | 21.57 | / | 23.5 | 22.5 | / |
| | | 1732.5 | 22.61 | 21.55 | / | 23.5 | 22.5 | / |
| | | 1720.0 | 22.49 | 21.46 | / | 23.5 | 22.5 | / |
| | 100RB_0 | 1745.0 | 22.56 | 21.54 | / | 23.5 | 22.5 | / |
| | | 1732.5 | 22.54 | 21.51 | / | 23.5 | 22.5 | / |
| | | 1720.0 | 22.45 | 21.47 | / | 23.5 | 22.5 | / |



| Sensor on | | | | | | | | |
|-------------|--------------------|-----------------|---------------------------|-------|-------|------------|-------|-------|
| LTE Band 4 | | | Actual output Power (dBm) | | | Tune up | | |
| Band -width | RB No. / RB offset | Frequency (MHz) | Modulation | | | Modulation | | |
| | | | QPSK | 16QAM | 64QAM | QPSK | 16QAM | 64QAM |
| 1.4 MHz | 1RB_5 | 1754.3 | 16.25 | 16.44 | / | 17.5 | 17.5 | / |
| | | 1732.5 | 16.33 | 16.54 | / | 17.5 | 17.5 | / |
| | | 1710.7 | 16.35 | 16.45 | / | 17.5 | 17.5 | / |
| | 1RB_3 | 1754.3 | 16.39 | 16.51 | / | 17.5 | 17.5 | / |
| | | 1732.5 | 16.46 | 16.71 | / | 17.5 | 17.5 | / |
| | | 1710.7 | 16.49 | 16.59 | / | 17.5 | 17.5 | / |
| | 1RB_0 | 1754.3 | 16.25 | 16.41 | / | 17.5 | 17.5 | / |
| | | 1732.5 | 16.35 | 16.54 | / | 17.5 | 17.5 | / |
| | | 1710.7 | 16.33 | 16.59 | / | 17.5 | 17.5 | / |
| | 3RB_3 | 1754.3 | 16.35 | 16.37 | / | 17.5 | 17.5 | / |
| | | 1732.5 | 16.44 | 16.43 | / | 17.5 | 17.5 | / |
| | | 1710.7 | 16.37 | 16.41 | / | 17.5 | 17.5 | / |
| | 3RB_1 | 1754.3 | 16.38 | 16.42 | / | 17.5 | 17.5 | / |
| | | 1732.5 | 16.48 | 16.44 | / | 17.5 | 17.5 | / |
| | | 1710.7 | 16.41 | 16.46 | / | 17.5 | 17.5 | / |
| | 3RB_0 | 1754.3 | 16.32 | 16.37 | / | 17.5 | 17.5 | / |
| | | 1732.5 | 16.41 | 16.40 | / | 17.5 | 17.5 | / |
| | | 1710.7 | 16.44 | 16.44 | / | 17.5 | 17.5 | / |
| | 6RB_0 | 1754.3 | 16.33 | 16.34 | / | 17.5 | 17.5 | / |
| | | 1732.5 | 16.41 | 16.49 | / | 17.5 | 17.5 | / |
| | | 1710.7 | 16.42 | 16.49 | / | 17.5 | 17.5 | / |



| Sensor on | | | | | | | | |
|-------------|--------------------|-----------------|---------------------------|-------|-------|------------|-------|-------|
| LTE Band 4 | | | Actual output Power (dBm) | | | Tune up | | |
| Band -width | RB No. / RB offset | Frequency (MHz) | Modulation | | | Modulation | | |
| | | | QPSK | 16QAM | 64QAM | QPSK | 16QAM | 64QAM |
| 3 MHz | 1RB_14 | 1753.5 | 16.32 | 16.56 | / | 17.5 | 17.5 | / |
| | | 1732.5 | 16.41 | 16.71 | / | 17.5 | 17.5 | / |
| | | 1711.5 | 16.42 | 16.71 | / | 17.5 | 17.5 | / |
| | 1RB_7 | 1753.5 | 16.43 | 16.80 | / | 17.5 | 17.5 | / |
| | | 1732.5 | 16.67 | 16.82 | / | 17.5 | 17.5 | / |
| | | 1711.5 | 16.54 | 16.75 | / | 17.5 | 17.5 | / |
| | 1RB_0 | 1753.5 | 16.28 | 16.55 | / | 17.5 | 17.5 | / |
| | | 1732.5 | 16.40 | 16.76 | / | 17.5 | 17.5 | / |
| | | 1711.5 | 16.39 | 16.69 | / | 17.5 | 17.5 | / |
| | 8RB_7 | 1753.5 | 16.32 | 16.37 | / | 17.5 | 17.5 | / |
| | | 1732.5 | 16.44 | 16.49 | / | 17.5 | 17.5 | / |
| | | 1711.5 | 16.38 | 16.48 | / | 17.5 | 17.5 | / |
| | 8RB_4 | 1753.5 | 16.38 | 16.41 | / | 17.5 | 17.5 | / |
| | | 1732.5 | 16.46 | 16.51 | / | 17.5 | 17.5 | / |
| | | 1711.5 | 16.47 | 16.52 | / | 17.5 | 17.5 | / |
| | 8RB_0 | 1753.5 | 16.39 | 16.43 | / | 17.5 | 17.5 | / |
| | | 1732.5 | 16.45 | 16.50 | / | 17.5 | 17.5 | / |
| | | 1711.5 | 16.42 | 16.48 | / | 17.5 | 17.5 | / |
| | 15RB_0 | 1753.5 | 16.35 | 16.28 | / | 17.5 | 17.5 | / |
| | | 1732.5 | 16.43 | 16.44 | / | 17.5 | 17.5 | / |
| | | 1711.5 | 16.42 | 16.46 | / | 17.5 | 17.5 | / |



| LTE Band 4 | | | Actual output Power (dBm) | | | Tune up | | |
|-------------|--------------------|-----------------|---------------------------|-------|-------|------------|-------|-------|
| Band -width | RB No. / RB offset | Frequency (MHz) | Modulation | | | Modulation | | |
| | | | QPSK | 16QAM | 64QAM | QPSK | 16QAM | 64QAM |
| 5 MHz | 1RB_24 | 1752.5 | 16.17 | 16.46 | / | 17.5 | 17.5 | / |
| | | 1732.5 | 16.25 | 16.65 | / | 17.5 | 17.5 | / |
| | | 1712.5 | 16.24 | 16.56 | / | 17.5 | 17.5 | / |
| | 1RB_12 | 1752.5 | 16.40 | 16.69 | / | 17.5 | 17.5 | / |
| | | 1732.5 | 16.56 | 16.79 | / | 17.5 | 17.5 | / |
| | | 1712.5 | 16.55 | 16.79 | / | 17.5 | 17.5 | / |
| | 1RB_0 | 1752.5 | 16.22 | 16.52 | / | 17.5 | 17.5 | / |
| | | 1732.5 | 16.33 | 16.58 | / | 17.5 | 17.5 | / |
| | | 1712.5 | 16.31 | 16.57 | / | 17.5 | 17.5 | / |
| | 12RB_13 | 1752.5 | 16.30 | 16.28 | / | 17.5 | 17.5 | / |
| | | 1732.5 | 16.44 | 16.41 | / | 17.5 | 17.5 | / |
| | | 1712.5 | 16.39 | 16.35 | / | 17.5 | 17.5 | / |
| | 12RB_6 | 1752.5 | 16.39 | 16.39 | / | 17.5 | 17.5 | / |
| | | 1732.5 | 16.50 | 16.43 | / | 17.5 | 17.5 | / |
| | | 1712.5 | 16.44 | 16.42 | / | 17.5 | 17.5 | / |
| | 12RB_0 | 1752.5 | 16.35 | 16.34 | / | 17.5 | 17.5 | / |
| | | 1732.5 | 16.42 | 16.39 | / | 17.5 | 17.5 | / |
| | | 1712.5 | 16.39 | 16.34 | / | 17.5 | 17.5 | / |
| | 25RB_0 | 1752.5 | 16.37 | 16.39 | / | 17.5 | 17.5 | / |
| | | 1732.5 | 16.44 | 16.44 | / | 17.5 | 17.5 | / |
| | | 1712.5 | 16.42 | 16.38 | / | 17.5 | 17.5 | / |



| Sensor on | | | | | | | | |
|------------|--------------------|-----------------|---------------------------|-------|-------|------------|-------|-------|
| LTE Band 4 | | | Actual output Power (dBm) | | | Tune up | | |
| Sensor on | RB No. / RB offset | Frequency (MHz) | Modulation | | | Modulation | | |
| | | | QPSK | 16QAM | 64QAM | QPSK | 16QAM | 64QAM |
| 10 MHz | 1RB_49 | 1750.0 | 16.25 | 16.51 | / | 17.5 | 17.5 | / |
| | | 1732.5 | 16.32 | 16.61 | / | 17.5 | 17.5 | / |
| | | 1715.0 | 16.38 | 16.70 | / | 17.5 | 17.5 | / |
| | 1RB_24 | 1750.0 | 16.40 | 16.66 | / | 17.5 | 17.5 | / |
| | | 1732.5 | 16.54 | 16.79 | / | 17.5 | 17.5 | / |
| | | 1715.0 | 16.43 | 16.79 | / | 17.5 | 17.5 | / |
| | 1RB_0 | 1750.0 | 16.35 | 16.62 | / | 17.5 | 17.5 | / |
| | | 1732.5 | 16.42 | 16.68 | / | 17.5 | 17.5 | / |
| | | 1715.0 | 16.39 | 16.72 | / | 17.5 | 17.5 | / |
| | 25RB_25 | 1750.0 | 16.34 | 16.33 | / | 17.5 | 17.5 | / |
| | | 1732.5 | 16.44 | 16.45 | / | 17.5 | 17.5 | / |
| | | 1715.0 | 16.44 | 16.46 | / | 17.5 | 17.5 | / |
| | 25RB_12 | 1750.0 | 16.39 | 16.37 | / | 17.5 | 17.5 | / |
| | | 1732.5 | 16.46 | 16.47 | / | 17.5 | 17.5 | / |
| | | 1715.0 | 16.43 | 16.45 | / | 17.5 | 17.5 | / |
| | 25RB_0 | 1750.0 | 16.41 | 16.39 | / | 17.5 | 17.5 | / |
| | | 1732.5 | 16.48 | 16.54 | / | 17.5 | 17.5 | / |
| | | 1715.0 | 16.39 | 16.41 | / | 17.5 | 17.5 | / |
| | 50RB_0 | 1750.0 | 16.36 | 16.36 | / | 17.5 | 17.5 | / |
| | | 1732.5 | 16.48 | 16.48 | / | 17.5 | 17.5 | / |
| | | 1715.0 | 16.41 | 16.38 | / | 17.5 | 17.5 | / |



| Sensor on | | | | | | | | |
|-------------|--------------------|-----------------|---------------------------|-------|-------|------------|-------|-------|
| LTE Band 4 | | | Actual output Power (dBm) | | | Tune up | | |
| Band -width | RB No. / RB offset | Frequency (MHz) | Modulation | | | Modulation | | |
| | | | QPSK | 16QAM | 64QAM | QPSK | 16QAM | 64QAM |
| 15 MHz | 1RB_74 | 1747.5 | 16.24 | 16.37 | / | 17.5 | 17.5 | / |
| | | 1732.5 | 16.30 | 16.56 | / | 17.5 | 17.5 | / |
| | | 1717.5 | 16.28 | 16.49 | / | 17.5 | 17.5 | / |
| | 1RB_37 | 1747.5 | 16.36 | 16.54 | / | 17.5 | 17.5 | / |
| | | 1732.5 | 16.35 | 16.71 | / | 17.5 | 17.5 | / |
| | | 1717.5 | 16.34 | 16.60 | / | 17.5 | 17.5 | / |
| | 1RB_0 | 1747.5 | 16.35 | 16.53 | / | 17.5 | 17.5 | / |
| | | 1732.5 | 16.36 | 16.63 | / | 17.5 | 17.5 | / |
| | | 1717.5 | 16.35 | 16.56 | / | 17.5 | 17.5 | / |
| | 36RB_38 | 1747.5 | 16.35 | 16.30 | / | 17.5 | 17.5 | / |
| | | 1732.5 | 16.46 | 16.43 | / | 17.5 | 17.5 | / |
| | | 1717.5 | 16.40 | 16.37 | / | 17.5 | 17.5 | / |
| | 36RB_19 | 1747.5 | 16.41 | 16.37 | / | 17.5 | 17.5 | / |
| | | 1732.5 | 16.49 | 16.40 | / | 17.5 | 17.5 | / |
| | | 1717.5 | 16.44 | 16.43 | / | 17.5 | 17.5 | / |
| | 36RB_0 | 1747.5 | 16.42 | 16.40 | / | 17.5 | 17.5 | / |
| | | 1732.5 | 16.44 | 16.42 | / | 17.5 | 17.5 | / |
| | | 1717.5 | 16.40 | 16.36 | / | 17.5 | 17.5 | / |
| | 75RB_0 | 1747.5 | 16.39 | 16.41 | / | 17.5 | 17.5 | / |
| | | 1732.5 | 16.45 | 16.46 | / | 17.5 | 17.5 | / |
| | | 1717.5 | 16.38 | 16.37 | / | 17.5 | 17.5 | / |



| Sensor on | | | | | | | | |
|-------------|--------------------|-----------------|---------------------------|-------|-------|------------|-------|-------|
| LTE Band 4 | | | Actual output Power (dBm) | | | Tune up | | |
| Band -width | RB No. / RB offset | Frequency (MHz) | Modulation | | | Modulation | | |
| | | | QPSK | 16QAM | 64QAM | QPSK | 16QAM | 64QAM |
| 20 MHz | 1RB_99 | 1745.0 | 16.13 | 16.49 | / | 17.5 | 17.5 | / |
| | | 1732.5 | 16.18 | 16.53 | / | 17.5 | 17.5 | / |
| | | 1720.0 | 16.23 | 16.56 | / | 17.5 | 17.5 | / |
| | 1RB_50 | 1745.0 | 16.46 | 16.74 | / | 17.5 | 17.5 | / |
| | | 1732.5 | 16.52 | 16.89 | / | 17.5 | 17.5 | / |
| | | 1720.0 | 16.51 | 16.73 | / | 17.5 | 17.5 | / |
| | 1RB_0 | 1745.0 | 16.35 | 16.70 | / | 17.5 | 17.5 | / |
| | | 1732.5 | 16.37 | 16.70 | / | 17.5 | 17.5 | / |
| | | 1720.0 | 16.33 | 16.63 | / | 17.5 | 17.5 | / |
| | 50RB_50 | 1745.0 | 16.29 | 16.32 | / | 17.5 | 17.5 | / |
| | | 1732.5 | 16.41 | 16.43 | / | 17.5 | 17.5 | / |
| | | 1720.0 | 16.42 | 16.39 | / | 17.5 | 17.5 | / |
| | 50RB_25 | 1745.0 | 16.43 | 16.45 | / | 17.5 | 17.5 | / |
| | | 1732.5 | 16.44 | 16.47 | / | 17.5 | 17.5 | / |
| | | 1720.0 | 16.45 | 16.47 | / | 17.5 | 17.5 | / |
| | 50RB_0 | 1745.0 | 16.43 | 16.44 | / | 17.5 | 17.5 | / |
| | | 1732.5 | 16.44 | 16.48 | / | 17.5 | 17.5 | / |
| | | 1720.0 | 16.33 | 16.35 | / | 17.5 | 17.5 | / |
| | 100RB_0 | 1745.0 | 16.34 | 16.37 | / | 17.5 | 17.5 | / |
| | | 1732.5 | 16.44 | 16.42 | / | 17.5 | 17.5 | / |
| | | 1720.0 | 16.41 | 16.36 | / | 17.5 | 17.5 | / |



| Full Power | | | | | | | | |
|-------------|--------------------|-----------|---------------------------|-------|-------|------------|-------|-------|
| LTE Band 5 | | | Actual output Power (dBm) | | | Tune up | | |
| Band -width | RB No. / RB offset | Frequency | Modulation | | | Modulation | | |
| | | | QPSK | 16QAM | 64QAM | QPSK | 16QAM | 64QAM |
| 1.4 MHz | 1RB_5 | 848.3MHz | 23.85 | 23.45 | / | 24.5 | 23.5 | / |
| | | 836.5MHz | 23.78 | 23.20 | / | 24.5 | 23.5 | / |
| | | 824.7MHz | 23.79 | 23.07 | / | 24.5 | 23.5 | / |
| | 1RB_3 | 848.3MHz | 23.98 | 23.58 | / | 24.5 | 23.5 | / |
| | | 836.5MHz | 23.85 | 23.33 | / | 24.5 | 23.5 | / |
| | | 824.7MHz | 23.86 | 23.08 | / | 24.5 | 23.5 | / |
| | 1RB_0 | 848.3MHz | 23.86 | 23.44 | / | 24.5 | 23.5 | / |
| | | 836.5MHz | 23.75 | 23.29 | / | 24.5 | 23.5 | / |
| | | 824.7MHz | 23.77 | 23.01 | / | 24.5 | 23.5 | / |
| | 3RB_3 | 848.3MHz | 23.91 | 23.04 | / | 24.5 | 23.5 | / |
| | | 836.5MHz | 23.86 | 22.94 | / | 24.5 | 23.5 | / |
| | | 824.7MHz | 23.85 | 22.79 | / | 24.5 | 23.5 | / |
| | 3RB_1 | 848.3MHz | 23.96 | 23.14 | / | 24.5 | 23.5 | / |
| | | 836.5MHz | 23.92 | 22.97 | / | 24.5 | 23.5 | / |
| | | 824.7MHz | 23.91 | 22.85 | / | 24.5 | 23.5 | / |
| | 3RB_0 | 848.3MHz | 23.88 | 23.02 | / | 24.5 | 23.5 | / |
| | | 836.5MHz | 23.88 | 22.91 | / | 24.5 | 23.5 | / |
| | | 824.7MHz | 23.85 | 22.85 | / | 24.5 | 23.5 | / |
| | 6RB_0 | 848.3MHz | 22.97 | 22.18 | / | 23.5 | 22.5 | / |
| | | 836.5MHz | 22.91 | 22.01 | / | 23.5 | 22.5 | / |
| | | 824.7MHz | 22.82 | 21.91 | / | 23.5 | 22.5 | / |



| Full Power | | | | | | | | |
|-------------|--------------------|-----------|---------------------------|-------|-------|------------|-------|-------|
| LTE Band 5 | | | Actual output Power (dBm) | | | Tune up | | |
| Band -width | RB No. / RB offset | Frequency | Modulation | | | Modulation | | |
| | | | QPSK | 16QAM | 64QAM | QPSK | 16QAM | 64QAM |
| 3 MHz | 1RB_14 | 847.5MHz | 23.95 | 23.39 | / | 24.5 | 23.5 | / |
| | | 836.5MHz | 23.83 | 23.20 | / | 24.5 | 23.5 | / |
| | | 825.5MHz | 23.81 | 23.13 | / | 24.5 | 23.5 | / |
| | 1RB_7 | 847.5MHz | 24.09 | 23.62 | / | 24.5 | 23.5 | / |
| | | 836.5MHz | 23.91 | 23.40 | / | 24.5 | 23.5 | / |
| | | 825.5MHz | 23.92 | 23.18 | / | 24.5 | 23.5 | / |
| | 1RB_0 | 847.5MHz | 23.91 | 23.38 | / | 24.5 | 23.5 | / |
| | | 836.5MHz | 23.79 | 23.28 | / | 24.5 | 23.5 | / |
| | | 825.5MHz | 23.78 | 23.01 | / | 24.5 | 23.5 | / |
| | 8RB_7 | 847.5MHz | 23.01 | 22.14 | / | 23.5 | 22.5 | / |
| | | 836.5MHz | 22.91 | 22.02 | / | 23.5 | 22.5 | / |
| | | 825.5MHz | 22.82 | 21.90 | / | 23.5 | 22.5 | / |
| | 8RB_4 | 847.5MHz | 22.97 | 22.12 | / | 23.5 | 22.5 | / |
| | | 836.5MHz | 22.89 | 22.08 | / | 23.5 | 22.5 | / |
| | | 825.5MHz | 22.86 | 21.94 | / | 23.5 | 22.5 | / |
| | 8RB_0 | 847.5MHz | 22.91 | 22.03 | / | 23.5 | 22.5 | / |
| | | 836.5MHz | 22.87 | 22.00 | / | 23.5 | 22.5 | / |
| | | 825.5MHz | 22.78 | 21.87 | / | 23.5 | 22.5 | / |
| | 15RB_0 | 847.5MHz | 22.91 | 21.97 | / | 23.5 | 22.5 | / |
| | | 836.5MHz | 22.85 | 21.95 | / | 23.5 | 22.5 | / |
| | | 825.5MHz | 22.76 | 21.78 | / | 23.5 | 22.5 | / |



| Full Power | | | | | | | | |
|-------------|--------------------|-----------|---------------------------|-------|-------|------------|-------|-------|
| LTE Band 5 | | | Actual output Power (dBm) | | | Tune up | | |
| Band -width | RB No. / RB offset | Frequency | Modulation | | | Modulation | | |
| | | | QPSK | 16QAM | 64QAM | QPSK | 16QAM | 64QAM |
| 5 MHz | 1RB_24 | 846.5MHz | 23.86 | 23.34 | / | 24.5 | 23.5 | / |
| | | 836.5MHz | 23.83 | 23.04 | / | 24.5 | 23.5 | / |
| | | 826.5MHz | 23.77 | 23.26 | / | 24.5 | 23.5 | / |
| | 1RB_12 | 846.5MHz | 24.09 | 23.48 | / | 24.5 | 23.5 | / |
| | | 836.5MHz | 24.01 | 23.35 | / | 24.5 | 23.5 | / |
| | | 826.5MHz | 23.95 | 23.21 | / | 24.5 | 23.5 | / |
| | 1RB_0 | 846.5MHz | 23.79 | 23.07 | / | 24.5 | 23.5 | / |
| | | 836.5MHz | 23.75 | 23.21 | / | 24.5 | 23.5 | / |
| | | 826.5MHz | 23.70 | 22.96 | / | 24.5 | 23.5 | / |
| | 12RB_13 | 846.5MHz | 22.95 | 21.98 | / | 23.5 | 22.5 | / |
| | | 836.5MHz | 22.97 | 22.02 | / | 23.5 | 22.5 | / |
| | | 826.5MHz | 22.85 | 21.84 | / | 23.5 | 22.5 | / |
| | 12RB_6 | 846.5MHz | 22.97 | 22.04 | / | 23.5 | 22.5 | / |
| | | 836.5MHz | 22.91 | 22.01 | / | 23.5 | 22.5 | / |
| | | 826.5MHz | 22.89 | 21.92 | / | 23.5 | 22.5 | / |
| | 12RB_0 | 846.5MHz | 22.93 | 21.96 | / | 23.5 | 22.5 | / |
| | | 836.5MHz | 22.85 | 21.93 | / | 23.5 | 22.5 | / |
| | | 826.5MHz | 22.87 | 21.85 | / | 23.5 | 22.5 | / |
| | 25RB_0 | 846.5MHz | 22.94 | 21.98 | / | 23.5 | 22.5 | / |
| | | 836.5MHz | 22.91 | 21.93 | / | 23.5 | 22.5 | / |
| | | 826.5MHz | 22.84 | 21.80 | / | 23.5 | 22.5 | / |



| Full Power | | | | | | | | |
|-------------|--------------------|-----------|---------------------------|-------|-------|------------|-------|-------|
| LTE Band 5 | | | Actual output Power (dBm) | | | Tune up | | |
| Band -width | RB No. / RB offset | Frequency | Modulation | | | Modulation | | |
| | | | QPSK | 16QAM | 64QAM | QPSK | 16QAM | 64QAM |
| 10 MHz | 1RB_49 | 844MHz | 23.96 | 23.44 | / | 24.5 | 23.5 | / |
| | | 836.5MHz | 23.89 | 23.21 | / | 24.5 | 23.5 | / |
| | | 829MHz | 23.95 | 23.56 | / | 24.5 | 23.5 | / |
| | 1RB_24 | 844MHz | 24.03 | 23.29 | / | 24.5 | 23.5 | / |
| | | 836.5MHz | 24.00 | 23.50 | / | 24.5 | 23.5 | / |
| | | 829MHz | 24.09 | 23.52 | / | 24.5 | 23.5 | / |
| | 1RB_0 | 844MHz | 23.91 | 23.09 | / | 24.5 | 23.5 | / |
| | | 836.5MHz | 23.87 | 23.50 | / | 24.5 | 23.5 | / |
| | | 829MHz | 23.84 | 23.17 | / | 24.5 | 23.5 | / |
| | 25RB_25 | 844MHz | 22.92 | 21.98 | / | 23.5 | 22.5 | / |
| | | 836.5MHz | 23.02 | 22.05 | / | 23.5 | 22.5 | / |
| | | 829MHz | 22.93 | 22.02 | / | 23.5 | 22.5 | / |
| | 25RB_12 | 844MHz | 23.01 | 22.00 | / | 23.5 | 22.5 | / |
| | | 836.5MHz | 22.93 | 22.03 | / | 23.5 | 22.5 | / |
| | | 829MHz | 22.96 | 22.07 | / | 23.5 | 22.5 | / |
| | 25RB_0 | 844MHz | 23.00 | 22.00 | / | 23.5 | 22.5 | / |
| | | 836.5MHz | 22.87 | 21.95 | / | 23.5 | 22.5 | / |
| | | 829MHz | 22.98 | 22.07 | / | 23.5 | 22.5 | / |
| | 50RB_0 | 844MHz | 23.01 | 22.04 | / | 23.5 | 22.5 | / |
| | | 836.5MHz | 22.90 | 22.03 | / | 23.5 | 22.5 | / |
| | | 829MHz | 22.97 | 22.04 | / | 23.5 | 22.5 | / |



| Sensor on | | | | | | | | |
|-------------|--------------------|-----------|---------------------------|-------|-------|------------|-------|-------|
| LTE Band 5 | | | Actual output Power (dBm) | | | Tune up | | |
| Band -width | RB No. / RB offset | Frequency | Modulation | | | Modulation | | |
| | | | QPSK | 16QAM | 64QAM | QPSK | 16QAM | 64QAM |
| 1.4 MHz | 1RB_5 | 848.3MHz | 20.56 | 20.90 | / | 21.5 | 21.5 | / |
| | | 836.5MHz | 20.62 | 20.91 | / | 21.5 | 21.5 | / |
| | | 824.7MHz | 20.63 | 20.93 | / | 21.5 | 21.5 | / |
| | 1RB_3 | 848.3MHz | 20.66 | 21.08 | / | 21.5 | 21.5 | / |
| | | 836.5MHz | 20.71 | 21.08 | / | 21.5 | 21.5 | / |
| | | 824.7MHz | 20.70 | 20.99 | / | 21.5 | 21.5 | / |
| | 1RB_0 | 848.3MHz | 20.52 | 20.88 | / | 21.5 | 21.5 | / |
| | | 836.5MHz | 20.61 | 20.93 | / | 21.5 | 21.5 | / |
| | | 824.7MHz | 20.56 | 20.90 | / | 21.5 | 21.5 | / |
| | 3RB_3 | 848.3MHz | 20.68 | 20.70 | / | 21.5 | 21.5 | / |
| | | 836.5MHz | 20.71 | 20.70 | / | 21.5 | 21.5 | / |
| | | 824.7MHz | 20.69 | 20.59 | / | 21.5 | 21.5 | / |
| | 3RB_1 | 848.3MHz | 20.69 | 20.77 | / | 21.5 | 21.5 | / |
| | | 836.5MHz | 20.77 | 20.70 | / | 21.5 | 21.5 | / |
| | | 824.7MHz | 20.70 | 20.67 | / | 21.5 | 21.5 | / |
| | 3RB_0 | 848.3MHz | 20.64 | 20.71 | / | 21.5 | 21.5 | / |
| | | 836.5MHz | 20.70 | 20.66 | / | 21.5 | 21.5 | / |
| | | 824.7MHz | 20.71 | 20.62 | / | 21.5 | 21.5 | / |
| | 6RB_0 | 848.3MHz | 20.62 | 20.71 | / | 21.5 | 21.5 | / |
| | | 836.5MHz | 20.70 | 20.80 | / | 21.5 | 21.5 | / |
| | | 824.7MHz | 20.65 | 20.75 | / | 21.5 | 21.5 | / |



| Sensor on | | | | | | | | |
|-------------|--------------------|-----------|---------------------------|-------|-------|------------|-------|-------|
| LTE Band 5 | | | Actual output Power (dBm) | | | Tune up | | |
| Band -width | RB No. / RB offset | Frequency | Modulation | | | Modulation | | |
| | | | QPSK | 16QAM | 64QAM | QPSK | 16QAM | 64QAM |
| 3 MHz | 1RB_14 | 847.5MHz | 20.62 | 21.02 | / | 21.5 | 21.5 | / |
| | | 836.5MHz | 20.60 | 20.87 | / | 21.5 | 21.5 | / |
| | | 825.5MHz | 20.69 | 20.90 | / | 21.5 | 21.5 | / |
| | 1RB_7 | 847.5MHz | 20.79 | 21.08 | / | 21.5 | 21.5 | / |
| | | 836.5MHz | 20.89 | 21.07 | / | 21.5 | 21.5 | / |
| | | 825.5MHz | 20.83 | 21.00 | / | 21.5 | 21.5 | / |
| | 1RB_0 | 847.5MHz | 20.62 | 20.95 | / | 21.5 | 21.5 | / |
| | | 836.5MHz | 20.62 | 20.98 | / | 21.5 | 21.5 | / |
| | | 825.5MHz | 20.59 | 20.80 | / | 21.5 | 21.5 | / |
| | 8RB_7 | 847.5MHz | 20.68 | 20.76 | / | 21.5 | 21.5 | / |
| | | 836.5MHz | 20.69 | 20.81 | / | 21.5 | 21.5 | / |
| | | 825.5MHz | 20.69 | 20.77 | / | 21.5 | 21.5 | / |
| | 8RB_4 | 847.5MHz | 20.69 | 20.74 | / | 21.5 | 21.5 | / |
| | | 836.5MHz | 20.70 | 20.82 | / | 21.5 | 21.5 | / |
| | | 825.5MHz | 20.73 | 20.80 | / | 21.5 | 21.5 | / |
| | 8RB_0 | 847.5MHz | 20.64 | 20.71 | / | 21.5 | 21.5 | / |
| | | 836.5MHz | 20.69 | 20.79 | / | 21.5 | 21.5 | / |
| | | 825.5MHz | 20.65 | 20.74 | / | 21.5 | 21.5 | / |
| | 15RB_0 | 847.5MHz | 20.56 | 20.65 | / | 21.5 | 21.5 | / |
| | | 836.5MHz | 20.66 | 20.73 | / | 21.5 | 21.5 | / |
| | | 825.5MHz | 20.66 | 20.68 | / | 21.5 | 21.5 | / |



| Sensor on | | | | | | | | |
|-------------|--------------------|-----------|---------------------------|-------|-------|------------|-------|-------|
| LTE Band 5 | | | Actual output Power (dBm) | | | Tune up | | |
| Band -width | RB No. / RB offset | Frequency | Modulation | | | Modulation | | |
| | | | QPSK | 16QAM | 64QAM | QPSK | 16QAM | 64QAM |
| 5 MHz | 1RB_24 | 846.5MHz | 20.54 | 20.85 | / | 21.5 | 21.5 | / |
| | | 836.5MHz | 20.53 | 20.79 | / | 21.5 | 21.5 | / |
| | | 826.5MHz | 20.62 | 20.89 | / | 21.5 | 21.5 | / |
| | 1RB_12 | 846.5MHz | 20.87 | 21.12 | / | 21.5 | 21.5 | / |
| | | 836.5MHz | 20.97 | 21.14 | / | 21.5 | 21.5 | / |
| | | 826.5MHz | 20.82 | 21.07 | / | 21.5 | 21.5 | / |
| | 1RB_0 | 846.5MHz | 20.52 | 20.83 | / | 21.5 | 21.5 | / |
| | | 836.5MHz | 20.63 | 20.95 | / | 21.5 | 21.5 | / |
| | | 826.5MHz | 20.55 | 20.88 | / | 21.5 | 21.5 | / |
| | 12RB_13 | 846.5MHz | 20.60 | 20.58 | / | 21.5 | 21.5 | / |
| | | 836.5MHz | 20.78 | 20.77 | / | 21.5 | 21.5 | / |
| | | 826.5MHz | 20.70 | 20.67 | / | 21.5 | 21.5 | / |
| | 12RB_6 | 846.5MHz | 20.72 | 20.64 | / | 21.5 | 21.5 | / |
| | | 836.5MHz | 20.73 | 20.78 | / | 21.5 | 21.5 | / |
| | | 826.5MHz | 20.72 | 20.75 | / | 21.5 | 21.5 | / |
| | 12RB_0 | 846.5MHz | 20.70 | 20.68 | / | 21.5 | 21.5 | / |
| | | 836.5MHz | 20.65 | 20.67 | / | 21.5 | 21.5 | / |
| | | 826.5MHz | 20.68 | 20.64 | / | 21.5 | 21.5 | / |
| | 25RB_0 | 846.5MHz | 20.61 | 20.64 | / | 21.5 | 21.5 | / |
| | | 836.5MHz | 20.71 | 20.73 | / | 21.5 | 21.5 | / |
| | | 826.5MHz | 20.67 | 20.64 | / | 21.5 | 21.5 | / |



| Sensor on | | | | | | | | |
|-------------|--------------------|-----------|---------------------------|-------|-------|------------|-------|-------|
| LTE Band 5 | | | Actual output Power (dBm) | | | Tune up | | |
| Band -width | RB No. / RB offset | Frequency | Modulation | | | Modulation | | |
| | | | QPSK | 16QAM | 64QAM | QPSK | 16QAM | 64QAM |
| 10 MHz | 1RB_49 | 844MHz | 20.66 | 21.02 | / | 21.5 | 21.5 | / |
| | | 836.5MHz | 20.65 | 20.91 | / | 21.5 | 21.5 | / |
| | | 829MHz | 20.80 | 21.16 | / | 21.5 | 21.5 | / |
| | 1RB_24 | 844MHz | 20.73 | 21.06 | / | 21.5 | 21.5 | / |
| | | 836.5MHz | 20.86 | 21.19 | / | 21.5 | 21.5 | / |
| | | 829MHz | 20.87 | 21.12 | / | 21.5 | 21.5 | / |
| | 1RB_0 | 844MHz | 20.62 | 20.93 | / | 21.5 | 21.5 | / |
| | | 836.5MHz | 20.76 | 21.14 | / | 21.5 | 21.5 | / |
| | | 829MHz | 20.66 | 20.96 | / | 21.5 | 21.5 | / |
| | 25RB_25 | 844MHz | 20.62 | 20.59 | / | 21.5 | 21.5 | / |
| | | 836.5MHz | 20.85 | 20.79 | / | 21.5 | 21.5 | / |
| | | 829MHz | 20.77 | 20.82 | / | 21.5 | 21.5 | / |
| | 25RB_12 | 844MHz | 20.75 | 20.74 | / | 21.5 | 21.5 | / |
| | | 836.5MHz | 20.78 | 20.75 | / | 21.5 | 21.5 | / |
| | | 829MHz | 20.80 | 20.81 | / | 21.5 | 21.5 | / |
| | 25RB_0 | 844MHz | 20.77 | 20.75 | / | 21.5 | 21.5 | / |
| | | 836.5MHz | 20.71 | 20.74 | / | 21.5 | 21.5 | / |
| | | 829MHz | 20.87 | 20.86 | / | 21.5 | 21.5 | / |
| | 50RB_0 | 844MHz | 20.69 | 20.67 | / | 21.5 | 21.5 | / |
| | | 836.5MHz | 20.77 | 20.77 | / | 21.5 | 21.5 | / |
| | | 829MHz | 20.82 | 20.80 | / | 21.5 | 21.5 | / |



| Full Power | | | | | | | | |
|-------------|--------------------|-----------|---------------------------|-------|-------|------------|-------|-------|
| LTE Band 7 | | | Actual output Power (dBm) | | | Tune up | | |
| Band -width | RB No. / RB offset | Frequency | Modulation | | | Modulation | | |
| | | | QPSK | 16QAM | 64QAM | QPSK | 16QAM | 64QAM |
| 5 MHz | 1RB_24 | 2567.4MHz | 23.32 | 22.57 | / | 24.0 | 23.0 | / |
| | | 2535MHz | 23.22 | 22.59 | / | 24.0 | 23.0 | / |
| | | 2502.5MHz | 23.26 | 22.52 | / | 24.0 | 23.0 | / |
| | 1RB_12 | 2567.4MHz | 23.60 | 22.78 | / | 24.0 | 23.0 | / |
| | | 2535MHz | 23.53 | 22.89 | / | 24.0 | 23.0 | / |
| | | 2502.5MHz | 23.48 | 22.68 | / | 24.0 | 23.0 | / |
| | 1RB_0 | 2567.4MHz | 23.24 | 22.54 | / | 24.0 | 23.0 | / |
| | | 2535MHz | 23.21 | 22.59 | / | 24.0 | 23.0 | / |
| | | 2502.5MHz | 23.21 | 22.47 | / | 24.0 | 23.0 | / |
| | 12RB_13 | 2567.4MHz | 22.42 | 21.46 | / | 23.0 | 22.0 | / |
| | | 2535MHz | 22.36 | 21.38 | / | 23.0 | 22.0 | / |
| | | 2502.5MHz | 22.44 | 21.42 | / | 23.0 | 22.0 | / |
| | 12RB_6 | 2567.4MHz | 22.50 | 21.48 | / | 23.0 | 22.0 | / |
| | | 2535MHz | 22.40 | 21.45 | / | 23.0 | 22.0 | / |
| | | 2502.5MHz | 22.35 | 21.42 | / | 23.0 | 22.0 | / |
| | 12RB_0 | 2567.4MHz | 22.44 | 21.46 | / | 23.0 | 22.0 | / |
| | | 2535MHz | 22.33 | 21.33 | / | 23.0 | 22.0 | / |
| | | 2502.5MHz | 22.37 | 21.34 | / | 23.0 | 22.0 | / |
| | 25RB_0 | 2567.4MHz | 22.45 | 21.48 | / | 23.0 | 22.0 | / |
| | | 2535MHz | 22.39 | 21.39 | / | 23.0 | 22.0 | / |
| | | 2502.5MHz | 22.41 | 21.43 | / | 23.0 | 22.0 | / |



| Full Power | | | | | | | | |
|-------------|--------------------|-----------|---------------------------|-------|-------|------------|-------|-------|
| LTE Band 7 | | | Actual output Power (dBm) | | | Tune up | | |
| Band -width | RB No. / RB offset | Frequency | Modulation | | | Modulation | | |
| | | | QPSK | 16QAM | 64QAM | QPSK | 16QAM | 64QAM |
| 10 MHz | 1RB_49 | 2565MHz | 23.47 | 22.74 | / | 24.0 | 23.0 | / |
| | | 2535MHz | 23.28 | 22.64 | / | 24.0 | 23.0 | / |
| | | 2505MHz | 23.32 | 22.69 | / | 24.0 | 23.0 | / |
| | 1RB_24 | 2565MHz | 23.43 | 22.80 | / | 24.0 | 23.0 | / |
| | | 2535MHz | 23.43 | 22.73 | / | 24.0 | 23.0 | / |
| | | 2505MHz | 23.42 | 22.80 | / | 24.0 | 23.0 | / |
| | 1RB_0 | 2565MHz | 23.30 | 22.71 | / | 24.0 | 23.0 | / |
| | | 2535MHz | 23.33 | 22.63 | / | 24.0 | 23.0 | / |
| | | 2505MHz | 23.25 | 22.64 | / | 24.0 | 23.0 | / |
| | 25RB_25 | 2565MHz | 22.43 | 21.45 | / | 23.0 | 22.0 | / |
| | | 2535MHz | 22.40 | 21.38 | / | 23.0 | 22.0 | / |
| | | 2505MHz | 22.44 | 21.49 | / | 23.0 | 22.0 | / |
| | 25RB_12 | 2565MHz | 22.45 | 21.55 | / | 23.0 | 22.0 | / |
| | | 2535MHz | 22.39 | 21.44 | / | 23.0 | 22.0 | / |
| | | 2505MHz | 22.45 | 21.47 | / | 23.0 | 22.0 | / |
| | 25RB_0 | 2565MHz | 22.46 | 21.51 | / | 23.0 | 22.0 | / |
| | | 2535MHz | 22.35 | 21.42 | / | 23.0 | 22.0 | / |
| | | 2505MHz | 22.40 | 21.42 | / | 23.0 | 22.0 | / |
| | 50RB_0 | 2565MHz | 22.51 | 21.47 | / | 23.0 | 22.0 | / |
| | | 2535MHz | 22.41 | 21.41 | / | 23.0 | 22.0 | / |
| | | 2505MHz | 22.47 | 21.50 | / | 23.0 | 22.0 | / |



| Full Power | | | | | | | | |
|-------------|--------------------|-----------|---------------------------|-------|-------|------------|-------|-------|
| LTE Band 7 | | | Actual output Power (dBm) | | | Tune up | | |
| Band -width | RB No. / RB offset | Frequency | Modulation | | | Modulation | | |
| | | | QPSK | 16QAM | 64QAM | QPSK | 16QAM | 64QAM |
| 15 MHz | 1RB_74 | 2562.5MHz | 23.39 | 22.66 | / | 24.0 | 23.0 | / |
| | | 2535MHz | 23.32 | 22.68 | / | 24.0 | 23.0 | / |
| | | 2507.5MHz | 23.29 | 22.65 | / | 24.0 | 23.0 | / |
| | 1RB_37 | 2562.5MHz | 23.41 | 22.70 | / | 24.0 | 23.0 | / |
| | | 2535MHz | 23.37 | 22.72 | / | 24.0 | 23.0 | / |
| | | 2507.5MHz | 23.34 | 22.69 | / | 24.0 | 23.0 | / |
| | 1RB_0 | 2562.5MHz | 23.29 | 22.51 | / | 24.0 | 23.0 | / |
| | | 2535MHz | 23.24 | 22.59 | / | 24.0 | 23.0 | / |
| | | 2507.5MHz | 23.23 | 22.52 | / | 24.0 | 23.0 | / |
| | 36RB_38 | 2562.5MHz | 22.52 | 21.54 | / | 23.0 | 22.0 | / |
| | | 2535MHz | 22.43 | 21.44 | / | 23.0 | 22.0 | / |
| | | 2507.5MHz | 22.48 | 21.51 | / | 23.0 | 22.0 | / |
| | 36RB_19 | 2562.5MHz | 22.55 | 21.52 | / | 23.0 | 22.0 | / |
| | | 2535MHz | 22.44 | 21.47 | / | 23.0 | 22.0 | / |
| | | 2507.5MHz | 22.49 | 21.52 | / | 23.0 | 22.0 | / |
| | 36RB_0 | 2562.5MHz | 22.45 | 21.48 | / | 23.0 | 22.0 | / |
| | | 2535MHz | 22.43 | 21.41 | / | 23.0 | 22.0 | / |
| | | 2507.5MHz | 22.41 | 21.39 | / | 23.0 | 22.0 | / |
| | 75RB_0 | 2562.5MHz | 22.46 | 21.53 | / | 23.0 | 22.0 | / |
| | | 2535MHz | 22.41 | 21.45 | / | 23.0 | 22.0 | / |
| | | 2507.5MHz | 22.47 | 21.45 | / | 23.0 | 22.0 | / |



| Full Power | | | | | | | | |
|-------------|--------------------|-----------|---------------------------|-------|-------|------------|-------|-------|
| LTE Band 7 | | | Actual output Power (dBm) | | | Tune up | | |
| Band -width | RB No. / RB offset | Frequency | Modulation | | | Modulation | | |
| | | | QPSK | 16QAM | 64QAM | QPSK | 16QAM | 64QAM |
| 20 MHz | 1RB_99 | 2560MHz | 23.32 | 22.73 | / | 24.0 | 23.0 | / |
| | | 2535MHz | 23.26 | 22.64 | / | 24.0 | 23.0 | / |
| | | 2510MHz | 23.29 | 22.62 | / | 24.0 | 23.0 | / |
| | 1RB_50 | 2560MHz | 23.46 | 22.88 | / | 24.0 | 23.0 | / |
| | | 2535MHz | 23.40 | 22.81 | / | 24.0 | 23.0 | / |
| | | 2510MHz | 23.45 | 22.76 | / | 24.0 | 23.0 | / |
| | 1RB_0 | 2560MHz | 23.15 | 22.61 | / | 24.0 | 23.0 | / |
| | | 2535MHz | 23.09 | 22.41 | / | 24.0 | 23.0 | / |
| | | 2510MHz | 23.16 | 22.46 | / | 24.0 | 23.0 | / |
| | 50RB_50 | 2560MHz | 22.44 | 21.50 | / | 23.0 | 22.0 | / |
| | | 2535MHz | 22.36 | 21.42 | / | 23.0 | 22.0 | / |
| | | 2510MHz | 22.44 | 21.49 | / | 23.0 | 22.0 | / |
| | 50RB_25 | 2560MHz | 22.52 | 21.53 | / | 23.0 | 22.0 | / |
| | | 2535MHz | 22.43 | 21.43 | / | 23.0 | 22.0 | / |
| | | 2510MHz | 22.43 | 21.46 | / | 23.0 | 22.0 | / |
| | 50RB_0 | 2560MHz | 22.43 | 21.40 | / | 23.0 | 22.0 | / |
| | | 2535MHz | 22.35 | 21.36 | / | 23.0 | 22.0 | / |
| | | 2510MHz | 22.34 | 21.40 | / | 23.0 | 22.0 | / |
| | 100RB_0 | 2560MHz | 22.43 | 21.48 | / | 23.0 | 22.0 | / |
| | | 2535MHz | 22.37 | 21.39 | / | 23.0 | 22.0 | / |
| | | 2510MHz | 22.41 | 21.44 | / | 23.0 | 22.0 | / |



| Sensor on | | | | | | | | |
|-------------|--------------------|-----------|---------------------------|-------|-------|------------|-------|-------|
| LTE Band 7 | | | Actual output Power (dBm) | | | Tune up | | |
| Band -width | RB No. / RB offset | Frequency | Modulation | | | Modulation | | |
| | | | QPSK | 16QAM | 64QAM | QPSK | 16QAM | 64QAM |
| 5 MHz | 1RB_24 | 2567.4MHz | 13.27 | 13.59 | / | 14.5 | 14.5 | / |
| | | 2535MHz | 13.26 | 13.52 | / | 14.5 | 14.5 | / |
| | | 2502.5MHz | 13.25 | 13.50 | / | 14.5 | 14.5 | / |
| | 1RB_12 | 2567.4MHz | 13.57 | 13.81 | / | 14.5 | 14.5 | / |
| | | 2535MHz | 13.41 | 13.75 | / | 14.5 | 14.5 | / |
| | | 2502.5MHz | 13.50 | 13.68 | / | 14.5 | 14.5 | / |
| | 1RB_0 | 2567.4MHz | 13.28 | 13.57 | / | 14.5 | 14.5 | / |
| | | 2535MHz | 13.22 | 13.51 | / | 14.5 | 14.5 | / |
| | | 2502.5MHz | 13.18 | 13.47 | / | 14.5 | 14.5 | / |
| | 12RB_13 | 2567.4MHz | 13.40 | 13.41 | / | 14.5 | 14.5 | / |
| | | 2535MHz | 13.37 | 13.34 | / | 14.5 | 14.5 | / |
| | | 2502.5MHz | 13.36 | 13.32 | / | 14.5 | 14.5 | / |
| | 12RB_6 | 2567.4MHz | 13.47 | 13.42 | / | 14.5 | 14.5 | / |
| | | 2535MHz | 13.44 | 13.43 | / | 14.5 | 14.5 | / |
| | | 2502.5MHz | 13.36 | 13.39 | / | 14.5 | 14.5 | / |
| | 12RB_0 | 2567.4MHz | 13.42 | 13.38 | / | 14.5 | 14.5 | / |
| | | 2535MHz | 13.37 | 13.35 | / | 14.5 | 14.5 | / |
| | | 2502.5MHz | 13.35 | 13.32 | / | 14.5 | 14.5 | / |
| | 25RB_0 | 2567.4MHz | 13.44 | 13.40 | / | 14.5 | 14.5 | / |
| | | 2535MHz | 13.37 | 13.35 | / | 14.5 | 14.5 | / |
| | | 2502.5MHz | 13.37 | 13.36 | / | 14.5 | 14.5 | / |



| Sensor on | | | | | | | | |
|-------------|--------------------|-----------|---------------------------|-------|-------|------------|-------|-------|
| LTE Band 7 | | | Actual output Power (dBm) | | | Tune up | | |
| Band -width | RB No. / RB offset | Frequency | Modulation | | | Modulation | | |
| | | | QPSK | 16QAM | 64QAM | QPSK | 16QAM | 64QAM |
| 10 MHz | 1RB_49 | 2565MHz | 13.42 | 13.71 | / | 14.5 | 14.5 | / |
| | | 2535MHz | 13.39 | 13.68 | / | 14.5 | 14.5 | / |
| | | 2505MHz | 13.37 | 13.69 | / | 14.5 | 14.5 | / |
| | 1RB_24 | 2565MHz | 13.50 | 13.72 | / | 14.5 | 14.5 | / |
| | | 2535MHz | 13.46 | 13.72 | / | 14.5 | 14.5 | / |
| | | 2505MHz | 13.44 | 13.77 | / | 14.5 | 14.5 | / |
| | 1RB_0 | 2565MHz | 13.29 | 13.59 | / | 14.5 | 14.5 | / |
| | | 2535MHz | 13.31 | 13.61 | / | 14.5 | 14.5 | / |
| | | 2505MHz | 13.30 | 13.60 | / | 14.5 | 14.5 | / |
| | 25RB_25 | 2565MHz | 13.53 | 13.50 | / | 14.5 | 14.5 | / |
| | | 2535MHz | 13.48 | 13.48 | / | 14.5 | 14.5 | / |
| | | 2505MHz | 13.37 | 13.40 | / | 14.5 | 14.5 | / |
| | 25RB_12 | 2565MHz | 13.48 | 13.44 | / | 14.5 | 14.5 | / |
| | | 2535MHz | 13.43 | 13.42 | / | 14.5 | 14.5 | / |
| | | 2505MHz | 13.39 | 13.41 | / | 14.5 | 14.5 | / |
| | 25RB_0 | 2565MHz | 13.44 | 13.43 | / | 14.5 | 14.5 | / |
| | | 2535MHz | 13.42 | 13.41 | / | 14.5 | 14.5 | / |
| | | 2505MHz | 13.38 | 13.40 | / | 14.5 | 14.5 | / |
| | 50RB_0 | 2565MHz | 13.46 | 13.48 | / | 14.5 | 14.5 | / |
| | | 2535MHz | 13.48 | 13.46 | / | 14.5 | 14.5 | / |
| | | 2505MHz | 13.42 | 13.43 | / | 14.5 | 14.5 | / |



| Sensor on | | | | | | | | |
|-------------|--------------------|-----------|---------------------------|-------|-------|------------|-------|-------|
| LTE Band 7 | | | Actual output Power (dBm) | | | Tune up | | |
| Band -width | RB No. / RB offset | Frequency | Modulation | | | Modulation | | |
| | | | QPSK | 16QAM | 64QAM | QPSK | 16QAM | 64QAM |
| 15 MHz | 1RB_74 | 2562.5MHz | 13.36 | 13.63 | / | 14.5 | 14.5 | / |
| | | 2535MHz | 13.34 | 13.73 | / | 14.5 | 14.5 | / |
| | | 2507.5MHz | 13.32 | 13.67 | / | 14.5 | 14.5 | / |
| | 1RB_37 | 2562.5MHz | 13.41 | 13.71 | / | 14.5 | 14.5 | / |
| | | 2535MHz | 13.36 | 13.71 | / | 14.5 | 14.5 | / |
| | | 2507.5MHz | 13.35 | 13.73 | / | 14.5 | 14.5 | / |
| | 1RB_0 | 2562.5MHz | 13.25 | 13.57 | / | 14.5 | 14.5 | / |
| | | 2535MHz | 13.26 | 13.59 | / | 14.5 | 14.5 | / |
| | | 2507.5MHz | 13.20 | 13.51 | / | 14.5 | 14.5 | / |
| | 36RB_38 | 2562.5MHz | 13.52 | 13.48 | / | 14.5 | 14.5 | / |
| | | 2535MHz | 13.44 | 13.46 | / | 14.5 | 14.5 | / |
| | | 2507.5MHz | 13.44 | 13.46 | / | 14.5 | 14.5 | / |
| | 36RB_19 | 2562.5MHz | 13.49 | 13.47 | / | 14.5 | 14.5 | / |
| | | 2535MHz | 13.45 | 13.43 | / | 14.5 | 14.5 | / |
| | | 2507.5MHz | 13.40 | 13.41 | / | 14.5 | 14.5 | / |
| | 36RB_0 | 2562.5MHz | 13.41 | 13.38 | / | 14.5 | 14.5 | / |
| | | 2535MHz | 13.36 | 13.31 | / | 14.5 | 14.5 | / |
| | | 2507.5MHz | 13.36 | 13.36 | / | 14.5 | 14.5 | / |
| | 75RB_0 | 2562.5MHz | 13.48 | 13.48 | / | 14.5 | 14.5 | / |
| | | 2535MHz | 13.42 | 13.39 | / | 14.5 | 14.5 | / |
| | | 2507.5MHz | 13.40 | 13.40 | / | 14.5 | 14.5 | / |



| Sensor on | | | | | | | | |
|-------------|--------------------|-----------|---------------------------|-------|-------|------------|-------|-------|
| LTE Band 7 | | | Actual output Power (dBm) | | | Tune up | | |
| Band -width | RB No. / RB offset | Frequency | Modulation | | | Modulation | | |
| | | | QPSK | 16QAM | 64QAM | QPSK | 16QAM | 64QAM |
| 20 MHz | 1RB_99 | 2560MHz | 13.34 | 13.64 | / | 14.5 | 14.5 | / |
| | | 2535MHz | 13.26 | 13.66 | / | 14.5 | 14.5 | / |
| | | 2510MHz | 13.30 | 13.55 | / | 14.5 | 14.5 | / |
| | 1RB_50 | 2560MHz | 13.51 | 13.82 | / | 14.5 | 14.5 | / |
| | | 2535MHz | 13.46 | 13.76 | / | 14.5 | 14.5 | / |
| | | 2510MHz | 13.50 | 13.67 | / | 14.5 | 14.5 | / |
| | 1RB_0 | 2560MHz | 13.22 | 13.62 | / | 14.5 | 14.5 | / |
| | | 2535MHz | 13.12 | 13.44 | / | 14.5 | 14.5 | / |
| | | 2510MHz | 13.14 | 13.38 | / | 14.5 | 14.5 | / |
| | 50RB_50 | 2560MHz | 13.49 | 13.51 | / | 14.5 | 14.5 | / |
| | | 2535MHz | 13.38 | 13.35 | / | 14.5 | 14.5 | / |
| | | 2510MHz | 13.40 | 13.47 | / | 14.5 | 14.5 | / |
| | 50RB_25 | 2560MHz | 13.47 | 13.45 | / | 14.5 | 14.5 | / |
| | | 2535MHz | 13.43 | 13.41 | / | 14.5 | 14.5 | / |
| | | 2510MHz | 13.41 | 13.40 | / | 14.5 | 14.5 | / |
| | 50RB_0 | 2560MHz | 13.36 | 13.38 | / | 14.5 | 14.5 | / |
| | | 2535MHz | 13.27 | 13.31 | / | 14.5 | 14.5 | / |
| | | 2510MHz | 13.32 | 13.34 | / | 14.5 | 14.5 | / |
| | 100RB_0 | 2560MHz | 13.46 | 13.44 | / | 14.5 | 14.5 | / |
| | | 2535MHz | 13.33 | 13.34 | / | 14.5 | 14.5 | / |
| | | 2510MHz | 13.39 | 13.36 | / | 14.5 | 14.5 | / |



| Full Power | | | | | | | | |
|-------------|--------------------|-----------------|---------------------------|-------|-------|------------|-------|-------|
| LTE Band 38 | | | Actual output Power (dBm) | | | Tune up | | |
| Band -width | RB No. / RB offset | Frequency (MHz) | Modulation | | | Modulation | | |
| | | | QPSK | 16QAM | 64QAM | QPSK | 16QAM | 64QAM |
| 5 MHz | 1RB_24 | 2617.5 | 22.89 | 21.91 | / | 24.0 | 23.0 | / |
| | | 2595.0 | 22.91 | 21.92 | / | 24.0 | 23.0 | / |
| | | 2572.5 | 22.86 | 21.87 | / | 24.0 | 23.0 | / |
| | 1RB_12 | 2617.5 | 23.03 | 22.08 | / | 24.0 | 23.0 | / |
| | | 2595.0 | 23.09 | 22.08 | / | 24.0 | 23.0 | / |
| | | 2572.5 | 23.02 | 22.04 | / | 24.0 | 23.0 | / |
| | 1RB_0 | 2617.5 | 22.90 | 21.95 | / | 24.0 | 23.0 | / |
| | | 2595.0 | 22.94 | 21.89 | / | 24.0 | 23.0 | / |
| | | 2572.5 | 22.94 | 21.96 | / | 24.0 | 23.0 | / |
| | 12RB_13 | 2617.5 | 22.00 | 20.94 | / | 23.0 | 22.0 | / |
| | | 2595.0 | 22.02 | 20.95 | / | 23.0 | 22.0 | / |
| | | 2572.5 | 21.95 | 20.86 | / | 23.0 | 22.0 | / |
| | 12RB_6 | 2617.5 | 22.08 | 21.01 | / | 23.0 | 22.0 | / |
| | | 2595.0 | 22.06 | 21.00 | / | 23.0 | 22.0 | / |
| | | 2572.5 | 22.05 | 20.96 | / | 23.0 | 22.0 | / |
| | 12RB_0 | 2617.5 | 21.93 | 20.88 | / | 23.0 | 22.0 | / |
| | | 2595.0 | 21.97 | 20.87 | / | 23.0 | 22.0 | / |
| | | 2572.5 | 21.97 | 20.85 | / | 23.0 | 22.0 | / |
| | 25RB_0 | 2617.5 | 22.02 | 20.98 | / | 23.0 | 22.0 | / |
| | | 2595.0 | 22.02 | 21.01 | / | 23.0 | 22.0 | / |
| | | 2572.5 | 21.93 | 20.92 | / | 23.0 | 22.0 | / |



| Full Power | | | | | | | | |
|-------------|--------------------|-----------------|---------------------------|-------|-------|------------|-------|-------|
| LTE Band 38 | | | Actual output Power (dBm) | | | Tune up | | |
| Band -width | RB No. / RB offset | Frequency (MHz) | Modulation | | | Modulation | | |
| | | | QPSK | 16QAM | 64QAM | QPSK | 16QAM | 64QAM |
| 10 MHz | 1RB_49 | 2615.0 | 22.96 | 22.01 | / | 24.0 | 23.0 | / |
| | | 2595.0 | 22.93 | 22.01 | / | 24.0 | 23.0 | / |
| | | 2575.0 | 22.95 | 21.95 | / | 24.0 | 23.0 | / |
| | 1RB_24 | 2615.0 | 23.11 | 22.17 | / | 24.0 | 23.0 | / |
| | | 2595.0 | 23.13 | 22.14 | / | 24.0 | 23.0 | / |
| | | 2575.0 | 23.09 | 22.13 | / | 24.0 | 23.0 | / |
| | 1RB_0 | 2615.0 | 22.98 | 22.03 | / | 24.0 | 23.0 | / |
| | | 2595.0 | 22.98 | 22.03 | / | 24.0 | 23.0 | / |
| | | 2575.0 | 23.02 | 22.02 | / | 24.0 | 23.0 | / |
| | 25RB_25 | 2615.0 | 22.10 | 21.05 | / | 23.0 | 22.0 | / |
| | | 2595.0 | 22.01 | 21.08 | / | 23.0 | 22.0 | / |
| | | 2575.0 | 22.01 | 20.95 | / | 23.0 | 22.0 | / |
| | 25RB_12 | 2615.0 | 22.01 | 21.04 | / | 23.0 | 22.0 | / |
| | | 2595.0 | 21.99 | 21.01 | / | 23.0 | 22.0 | / |
| | | 2575.0 | 21.99 | 20.98 | / | 23.0 | 22.0 | / |
| | 25RB_0 | 2615.0 | 21.97 | 20.96 | / | 23.0 | 22.0 | / |
| | | 2595.0 | 22.02 | 21.01 | / | 23.0 | 22.0 | / |
| | | 2575.0 | 21.96 | 20.96 | / | 23.0 | 22.0 | / |
| | 50RB_0 | 2615.0 | 21.97 | 20.95 | / | 23.0 | 22.0 | / |
| | | 2595.0 | 22.02 | 20.99 | / | 23.0 | 22.0 | / |
| | | 2575.0 | 21.94 | 20.95 | / | 23.0 | 22.0 | / |



| Full Power | | | | | | | | |
|-------------|--------------------|-----------------|---------------------------|-------|-------|------------|-------|-------|
| LTE Band 38 | | | Actual output Power (dBm) | | | Tune up | | |
| Band -width | RB No. / RB offset | Frequency (MHz) | Modulation | | | Modulation | | |
| | | | QPSK | 16QAM | 64QAM | QPSK | 16QAM | 64QAM |
| 15 MHz | 1RB_74 | 2612.5 | 22.88 | 21.95 | / | 24.0 | 23.0 | / |
| | | 2595.0 | 22.85 | 21.94 | / | 24.0 | 23.0 | / |
| | | 2577.5 | 22.95 | 21.93 | / | 24.0 | 23.0 | / |
| | 1RB_37 | 2612.5 | 23.00 | 22.02 | / | 24.0 | 23.0 | / |
| | | 2595.0 | 23.00 | 21.98 | / | 24.0 | 23.0 | / |
| | | 2577.5 | 22.97 | 22.01 | / | 24.0 | 23.0 | / |
| | 1RB_0 | 2612.5 | 22.91 | 21.94 | / | 24.0 | 23.0 | / |
| | | 2595.0 | 22.90 | 21.99 | / | 24.0 | 23.0 | / |
| | | 2577.5 | 22.96 | 21.98 | / | 24.0 | 23.0 | / |
| | 36RB_38 | 2612.5 | 22.05 | 20.96 | / | 23.0 | 22.0 | / |
| | | 2595.0 | 22.01 | 20.96 | / | 23.0 | 22.0 | / |
| | | 2577.5 | 22.03 | 20.89 | / | 23.0 | 22.0 | / |
| | 36RB_19 | 2612.5 | 22.03 | 20.94 | / | 23.0 | 22.0 | / |
| | | 2595.0 | 22.06 | 20.98 | / | 23.0 | 22.0 | / |
| | | 2577.5 | 22.03 | 20.86 | / | 23.0 | 22.0 | / |
| | 36RB_0 | 2612.5 | 21.98 | 20.89 | / | 23.0 | 22.0 | / |
| | | 2595.0 | 22.03 | 20.96 | / | 23.0 | 22.0 | / |
| | | 2577.5 | 22.00 | 20.91 | / | 23.0 | 22.0 | / |
| | 75RB_0 | 2612.5 | 21.88 | 20.90 | / | 23.0 | 22.0 | / |
| | | 2595.0 | 21.91 | 20.96 | / | 23.0 | 22.0 | / |
| | | 2577.5 | 21.96 | 20.88 | / | 23.0 | 22.0 | / |



| Full Power | | | | | | | | |
|-------------|--------------------|-----------------|---------------------------|-------|-------|------------|-------|-------|
| LTE Band 38 | | | Actual output Power (dBm) | | | Tune up | | |
| Band -width | RB No. / RB offset | Frequency (MHz) | Modulation | | | Modulation | | |
| | | | QPSK | 16QAM | 64QAM | QPSK | 16QAM | 64QAM |
| 20 MHz | 1RB_99 | 2610.0 | 22.84 | 21.86 | / | 24.0 | 23.0 | / |
| | | 2595.0 | 22.82 | 21.86 | / | 24.0 | 23.0 | / |
| | | 2580.0 | 22.83 | 21.88 | / | 24.0 | 23.0 | / |
| | 1RB_50 | 2610.0 | 22.99 | 22.01 | / | 24.0 | 23.0 | / |
| | | 2595.0 | 23.00 | 22.04 | / | 24.0 | 23.0 | / |
| | | 2580.0 | 22.99 | 22.06 | / | 24.0 | 23.0 | / |
| | 1RB_0 | 2610.0 | 22.80 | 21.88 | / | 24.0 | 23.0 | / |
| | | 2595.0 | 22.90 | 21.90 | / | 24.0 | 23.0 | / |
| | | 2580.0 | 22.86 | 21.90 | / | 24.0 | 23.0 | / |
| | 50RB_50 | 2610.0 | 21.90 | 20.90 | / | 23.0 | 22.0 | / |
| | | 2595.0 | 21.84 | 20.90 | / | 23.0 | 22.0 | / |
| | | 2580.0 | 21.90 | 20.91 | / | 23.0 | 22.0 | / |
| | 50RB_25 | 2610.0 | 21.85 | 20.91 | / | 23.0 | 22.0 | / |
| | | 2595.0 | 21.91 | 20.93 | / | 23.0 | 22.0 | / |
| | | 2580.0 | 21.87 | 20.85 | / | 23.0 | 22.0 | / |
| | 50RB_0 | 2610.0 | 21.82 | 20.81 | / | 23.0 | 22.0 | / |
| | | 2595.0 | 21.74 | 20.75 | / | 23.0 | 22.0 | / |
| | | 2580.0 | 21.79 | 20.74 | / | 23.0 | 22.0 | / |
| | 100RB_0 | 2610.0 | 21.94 | 20.97 | / | 23.0 | 22.0 | / |
| | | 2595.0 | 21.96 | 20.94 | / | 23.0 | 22.0 | / |
| | | 2580.0 | 21.91 | 20.97 | / | 23.0 | 22.0 | / |



| Sensor on | | | | | | | | |
|-------------|--------------------|-----------------|---------------------------|-------|-------|------------|-------|-------|
| LTE Band 38 | | | Actual output Power (dBm) | | | Tune up | | |
| Band -width | RB No. / RB offset | Frequency (MHz) | Modulation | | | Modulation | | |
| | | | QPSK | 16QAM | 64QAM | QPSK | 16QAM | 64QAM |
| 5 MHz | 1RB_24 | 2617.5 | 18.78 | 18.79 | / | 19.5 | 19.5 | / |
| | | 2595.0 | 18.70 | 18.72 | / | 19.5 | 19.5 | / |
| | | 2572.5 | 18.79 | 18.81 | / | 19.5 | 19.5 | / |
| | 1RB_12 | 2617.5 | 18.91 | 19.00 | / | 19.5 | 19.5 | / |
| | | 2595.0 | 18.90 | 18.94 | / | 19.5 | 19.5 | / |
| | | 2572.5 | 18.96 | 19.00 | / | 19.5 | 19.5 | / |
| | 1RB_0 | 2617.5 | 18.77 | 18.83 | / | 19.5 | 19.5 | / |
| | | 2595.0 | 18.76 | 18.82 | / | 19.5 | 19.5 | / |
| | | 2572.5 | 18.86 | 18.89 | / | 19.5 | 19.5 | / |
| | 12RB_13 | 2617.5 | 18.82 | 18.82 | / | 19.5 | 19.5 | / |
| | | 2595.0 | 18.74 | 18.78 | / | 19.5 | 19.5 | / |
| | | 2572.5 | 18.84 | 18.82 | / | 19.5 | 19.5 | / |
| | 12RB_6 | 2617.5 | 18.91 | 18.81 | / | 19.5 | 19.5 | / |
| | | 2595.0 | 18.90 | 18.86 | / | 19.5 | 19.5 | / |
| | | 2572.5 | 18.89 | 18.88 | / | 19.5 | 19.5 | / |
| | 12RB_0 | 2617.5 | 18.76 | 18.74 | / | 19.5 | 19.5 | / |
| | | 2595.0 | 18.81 | 18.79 | / | 19.5 | 19.5 | / |
| | | 2572.5 | 18.89 | 18.81 | / | 19.5 | 19.5 | / |
| | 25RB_0 | 2617.5 | 18.84 | 18.86 | / | 19.5 | 19.5 | / |
| | | 2595.0 | 18.91 | 18.84 | / | 19.5 | 19.5 | / |
| | | 2572.5 | 18.95 | 18.99 | / | 19.5 | 19.5 | / |



| Sensor on | | | | | | | | |
|-------------|--------------------|-----------------|---------------------------|-------|-------|------------|-------|-------|
| LTE Band 38 | | | Actual output Power (dBm) | | | Tune up | | |
| Band -width | RB No. / RB offset | Frequency (MHz) | Modulation | | | Modulation | | |
| | | | QPSK | 16QAM | 64QAM | QPSK | 16QAM | 64QAM |
| 10 MHz | 1RB_49 | 2615.0 | 18.87 | 18.94 | / | 19.5 | 19.5 | / |
| | | 2595.0 | 18.86 | 18.93 | / | 19.5 | 19.5 | / |
| | | 2575.0 | 18.91 | 18.93 | / | 19.5 | 19.5 | / |
| | 1RB_24 | 2615.0 | 18.99 | 19.04 | / | 19.5 | 19.5 | / |
| | | 2595.0 | 18.97 | 19.03 | / | 19.5 | 19.5 | / |
| | | 2575.0 | 18.99 | 19.05 | / | 19.5 | 19.5 | / |
| | 1RB_0 | 2615.0 | 18.82 | 18.93 | / | 19.5 | 19.5 | / |
| | | 2595.0 | 18.85 | 18.97 | / | 19.5 | 19.5 | / |
| | | 2575.0 | 18.97 | 19.02 | / | 19.5 | 19.5 | / |
| | 25RB_25 | 2615.0 | 18.91 | 18.95 | / | 19.5 | 19.5 | / |
| | | 2595.0 | 18.92 | 18.91 | / | 19.5 | 19.5 | / |
| | | 2575.0 | 18.90 | 18.92 | / | 19.5 | 19.5 | / |
| | 25RB_12 | 2615.0 | 18.88 | 18.92 | / | 19.5 | 19.5 | / |
| | | 2595.0 | 18.92 | 18.92 | / | 19.5 | 19.5 | / |
| | | 2575.0 | 18.94 | 18.91 | / | 19.5 | 19.5 | / |
| | 25RB_0 | 2615.0 | 18.90 | 18.88 | / | 19.5 | 19.5 | / |
| | | 2595.0 | 18.92 | 18.90 | / | 19.5 | 19.5 | / |
| | | 2575.0 | 18.96 | 18.97 | / | 19.5 | 19.5 | / |
| | 50RB_0 | 2615.0 | 18.85 | 18.90 | / | 19.5 | 19.5 | / |
| | | 2595.0 | 18.83 | 18.86 | / | 19.5 | 19.5 | / |
| | | 2575.0 | 18.89 | 18.89 | / | 19.5 | 19.5 | / |



| Sensor on | | | | | | | | |
|-------------|--------------------|-----------------|---------------------------|-------|-------|------------|-------|-------|
| LTE Band 38 | | | Actual output Power (dBm) | | | Tune up | | |
| Band -width | RB No. / RB offset | Frequency (MHz) | Modulation | | | Modulation | | |
| | | | QPSK | 16QAM | 64QAM | QPSK | 16QAM | 64QAM |
| 15 MHz | 1RB_74 | 2612.5 | 18.73 | 18.83 | / | 19.5 | 19.5 | / |
| | | 2595.0 | 18.78 | 18.84 | / | 19.5 | 19.5 | / |
| | | 2577.5 | 18.72 | 18.80 | / | 19.5 | 19.5 | / |
| | 1RB_37 | 2612.5 | 18.86 | 18.92 | / | 19.5 | 19.5 | / |
| | | 2595.0 | 18.80 | 18.93 | / | 19.5 | 19.5 | / |
| | | 2577.5 | 18.89 | 18.98 | / | 19.5 | 19.5 | / |
| | 1RB_0 | 2612.5 | 18.74 | 18.81 | / | 19.5 | 19.5 | / |
| | | 2595.0 | 18.74 | 18.80 | / | 19.5 | 19.5 | / |
| | | 2577.5 | 18.85 | 18.87 | / | 19.5 | 19.5 | / |
| | 36RB_38 | 2612.5 | 18.92 | 18.81 | / | 19.5 | 19.5 | / |
| | | 2595.0 | 18.88 | 18.81 | / | 19.5 | 19.5 | / |
| | | 2577.5 | 18.85 | 18.85 | / | 19.5 | 19.5 | / |
| | 36RB_19 | 2612.5 | 18.91 | 18.85 | / | 19.5 | 19.5 | / |
| | | 2595.0 | 18.85 | 18.85 | / | 19.5 | 19.5 | / |
| | | 2577.5 | 18.95 | 18.86 | / | 19.5 | 19.5 | / |
| | 36RB_0 | 2612.5 | 18.79 | 18.73 | / | 19.5 | 19.5 | / |
| | | 2595.0 | 18.85 | 18.80 | / | 19.5 | 19.5 | / |
| | | 2577.5 | 18.92 | 18.83 | / | 19.5 | 19.5 | / |
| | 75RB_0 | 2612.5 | 18.76 | 18.78 | / | 19.5 | 19.5 | / |
| | | 2595.0 | 18.74 | 18.81 | / | 19.5 | 19.5 | / |
| | | 2577.5 | 18.81 | 18.93 | / | 19.5 | 19.5 | / |



| Sensor on | | | | | | | | |
|-------------|--------------------|-----------------|---------------------------|-------|-------|------------|-------|-------|
| LTE Band 38 | | | Actual output Power (dBm) | | | Tune up | | |
| Band -width | RB No. / RB offset | Frequency (MHz) | Modulation | | | Modulation | | |
| | | | QPSK | 16QAM | 64QAM | QPSK | 16QAM | 64QAM |
| 20 MHz | 1RB_99 | 2610.0 | 18.70 | 18.75 | / | 19.5 | 19.5 | / |
| | | 2595.0 | 18.60 | 18.74 | / | 19.5 | 19.5 | / |
| | | 2580.0 | 18.69 | 18.73 | / | 19.5 | 19.5 | / |
| | 1RB_50 | 2610.0 | 18.99 | 18.97 | / | 19.5 | 19.5 | / |
| | | 2595.0 | 18.92 | 19.09 | / | 19.5 | 19.5 | / |
| | | 2580.0 | 18.98 | 19.02 | / | 19.5 | 19.5 | / |
| | 1RB_0 | 2610.0 | 18.68 | 18.74 | / | 19.5 | 19.5 | / |
| | | 2595.0 | 18.71 | 18.73 | / | 19.5 | 19.5 | / |
| | | 2580.0 | 18.75 | 18.85 | / | 19.5 | 19.5 | / |
| | 50RB_50 | 2610.0 | 18.78 | 18.84 | / | 19.5 | 19.5 | / |
| | | 2595.0 | 18.76 | 18.85 | / | 19.5 | 19.5 | / |
| | | 2580.0 | 18.82 | 18.82 | / | 19.5 | 19.5 | / |
| | 50RB_25 | 2610.0 | 18.74 | 18.82 | / | 19.5 | 19.5 | / |
| | | 2595.0 | 18.75 | 18.79 | / | 19.5 | 19.5 | / |
| | | 2580.0 | 18.81 | 18.83 | / | 19.5 | 19.5 | / |
| | 50RB_0 | 2610.0 | 18.66 | 18.71 | / | 19.5 | 19.5 | / |
| | | 2595.0 | 18.67 | 18.76 | / | 19.5 | 19.5 | / |
| | | 2580.0 | 18.75 | 18.73 | / | 19.5 | 19.5 | / |
| | 100RB_0 | 2610.0 | 18.79 | 18.83 | / | 19.5 | 19.5 | / |
| | | 2595.0 | 18.81 | 18.85 | / | 19.5 | 19.5 | / |
| | | 2580.0 | 18.85 | 18.90 | / | 19.5 | 19.5 | / |



| Full Power | | | | | | | | |
|-------------|--------------------|-----------------|---------------------------|-------|-------|------------|-------|-------|
| LTE Band 41 | | | Actual output Power (dBm) | | | Tune up | | |
| Band -width | RB No. / RB offset | Frequency (MHz) | Modulation | | | Modulation | | |
| | | | QPSK | 16QAM | 64QAM | QPSK | 16QAM | 64QAM |
| 5 MHz | 1RB_24 | 2687.5 | 21.35 | 20.39 | / | 22.5 | 21.5 | / |
| | | 2640.3 | 21.33 | 20.38 | / | 22.5 | 21.5 | / |
| | | 2593.0 | 21.46 | 20.46 | / | 22.5 | 21.5 | / |
| | | 2545.8 | 21.41 | 20.36 | / | 22.5 | 21.5 | / |
| | | 2498.5 | 21.27 | 20.35 | / | 22.5 | 21.5 | / |
| | 1RB_12 | 2687.5 | 21.52 | 20.55 | / | 22.5 | 21.5 | / |
| | | 2640.3 | 21.59 | 20.62 | / | 22.5 | 21.5 | / |
| | | 2593.0 | 21.59 | 20.61 | / | 22.5 | 21.5 | / |
| | | 2545.8 | 21.54 | 20.56 | / | 22.5 | 21.5 | / |
| | | 2498.5 | 21.52 | 20.51 | / | 22.5 | 21.5 | / |
| | 1RB_0 | 2687.5 | 21.35 | 20.38 | / | 22.5 | 21.5 | / |
| | | 2640.3 | 21.39 | 20.41 | / | 22.5 | 21.5 | / |
| | | 2593.0 | 21.43 | 20.43 | / | 22.5 | 21.5 | / |
| | | 2545.8 | 21.40 | 20.43 | / | 22.5 | 21.5 | / |
| | | 2498.5 | 21.28 | 20.31 | / | 22.5 | 21.5 | / |
| | 12RB_13 | 2687.5 | 20.41 | 19.36 | / | 21.5 | 20.5 | / |
| | | 2640.3 | 20.45 | 19.40 | / | 21.5 | 20.5 | / |
| | | 2593.0 | 20.53 | 19.44 | / | 21.5 | 20.5 | / |
| | | 2545.8 | 20.48 | 19.36 | / | 21.5 | 20.5 | / |
| | | 2498.5 | 20.37 | 19.26 | / | 21.5 | 20.5 | / |
| | 12RB_6 | 2687.5 | 20.50 | 19.38 | / | 21.5 | 20.5 | / |
| | | 2640.3 | 20.50 | 19.41 | / | 21.5 | 20.5 | / |
| | | 2593.0 | 20.59 | 19.48 | / | 21.5 | 20.5 | / |
| | | 2545.8 | 20.56 | 19.49 | / | 21.5 | 20.5 | / |
| | | 2498.5 | 20.49 | 19.35 | / | 21.5 | 20.5 | / |
| | 12RB_0 | 2687.5 | 20.43 | 19.37 | / | 21.5 | 20.5 | / |
| | | 2640.3 | 20.43 | 19.37 | / | 21.5 | 20.5 | / |
| | | 2593.0 | 20.44 | 19.40 | / | 21.5 | 20.5 | / |
| | | 2545.8 | 20.51 | 19.38 | / | 21.5 | 20.5 | / |
| | | 2498.5 | 20.43 | 19.35 | / | 21.5 | 20.5 | / |
| 25RB_0 | 2687.5 | 20.40 | 19.38 | / | 21.5 | 20.5 | / | |
| | 2640.3 | 20.47 | 19.47 | / | 21.5 | 20.5 | / | |
| | 2593.0 | 20.47 | 19.49 | / | 21.5 | 20.5 | / | |
| | 2545.8 | 20.45 | 19.43 | / | 21.5 | 20.5 | / | |
| | 2498.5 | 20.39 | 19.35 | / | 21.5 | 20.5 | / | |



| Full Power | | | | | | | | |
|-------------|--------------------|-----------------|---------------------------|-------|-------|------------|-------|-------|
| LTE Band 41 | | | Actual output Power (dBm) | | | Tune up | | |
| Band -width | RB No. / RB offset | Frequency (MHz) | Modulation | | | Modulation | | |
| | | | QPSK | 16QAM | 64QAM | QPSK | 16QAM | 64QAM |
| 10 MHz | 1RB_49 | 2685.0 | 21.47 | 20.49 | / | 22.5 | 21.5 | / |
| | | 2639.0 | 21.45 | 20.48 | / | 22.5 | 21.5 | / |
| | | 2593.0 | 21.54 | 20.56 | / | 22.5 | 21.5 | / |
| | | 2547.0 | 21.50 | 20.52 | / | 22.5 | 21.5 | / |
| | | 2501.0 | 21.42 | 20.44 | / | 22.5 | 21.5 | / |
| | 1RB_24 | 2685.0 | 21.55 | 20.62 | / | 22.5 | 21.5 | / |
| | | 2639.0 | 21.63 | 20.62 | / | 22.5 | 21.5 | / |
| | | 2593.0 | 21.67 | 20.68 | / | 22.5 | 21.5 | / |
| | | 2547.0 | 21.66 | 20.66 | / | 22.5 | 21.5 | / |
| | | 2501.0 | 21.52 | 20.48 | / | 22.5 | 21.5 | / |
| | 1RB_0 | 2685.0 | 21.46 | 20.46 | / | 22.5 | 21.5 | / |
| | | 2639.0 | 21.50 | 20.54 | / | 22.5 | 21.5 | / |
| | | 2593.0 | 21.57 | 20.56 | / | 22.5 | 21.5 | / |
| | | 2547.0 | 21.51 | 20.52 | / | 22.5 | 21.5 | / |
| | | 2501.0 | 21.42 | 20.46 | / | 22.5 | 21.5 | / |
| | 25RB_25 | 2685.0 | 20.44 | 19.44 | / | 21.5 | 20.5 | / |
| | | 2639.0 | 20.50 | 19.52 | / | 21.5 | 20.5 | / |
| | | 2593.0 | 20.55 | 19.54 | / | 21.5 | 20.5 | / |
| | | 2547.0 | 20.55 | 19.48 | / | 21.5 | 20.5 | / |
| | | 2501.0 | 20.39 | 19.34 | / | 21.5 | 20.5 | / |
| | 25RB_12 | 2685.0 | 20.50 | 19.49 | / | 21.5 | 20.5 | / |
| | | 2639.0 | 20.54 | 19.55 | / | 21.5 | 20.5 | / |
| | | 2593.0 | 20.51 | 19.53 | / | 21.5 | 20.5 | / |
| | | 2547.0 | 20.52 | 19.54 | / | 21.5 | 20.5 | / |
| | | 2501.0 | 20.46 | 19.40 | / | 21.5 | 20.5 | / |
| 25RB_0 | 2685.0 | 20.51 | 19.52 | / | 21.5 | 20.5 | / | |
| | 2639.0 | 20.53 | 19.54 | / | 21.5 | 20.5 | / | |
| | 2593.0 | 20.53 | 19.49 | / | 21.5 | 20.5 | / | |
| | 2547.0 | 20.54 | 19.52 | / | 21.5 | 20.5 | / | |
| | 2501.0 | 20.46 | 19.47 | / | 21.5 | 20.5 | / | |
| 50RB_0 | 2685.0 | 20.38 | 19.37 | / | 21.5 | 20.5 | / | |
| | 2639.0 | 20.43 | 19.41 | / | 21.5 | 20.5 | / | |
| | 2593.0 | 20.49 | 19.46 | / | 21.5 | 20.5 | / | |
| | 2547.0 | 20.45 | 19.43 | / | 21.5 | 20.5 | / | |
| | 2501.0 | 20.38 | 19.35 | / | 21.5 | 20.5 | / | |



| Full Power | | | | | | | | |
|-------------|--------------------|-----------------|---------------------------|-------|-------|------------|-------|-------|
| LTE Band 41 | | | Actual output Power (dBm) | | | Tune up | | |
| Band -width | RB No. / RB offset | Frequency (MHz) | Modulation | | | Modulation | | |
| | | | QPSK | 16QAM | 64QAM | QPSK | 16QAM | 64QAM |
| 15 MHz | 1RB_74 | 2682.5 | 21.35 | 20.37 | / | 22.5 | 21.5 | / |
| | | 2637.8 | 21.35 | 20.37 | / | 22.5 | 21.5 | / |
| | | 2593.0 | 21.44 | 20.47 | / | 22.5 | 21.5 | / |
| | | 2548.3 | 21.42 | 20.43 | / | 22.5 | 21.5 | / |
| | | 2503.5 | 21.34 | 20.35 | / | 22.5 | 21.5 | / |
| | 1RB_37 | 2682.5 | 21.44 | 20.44 | / | 22.5 | 21.5 | / |
| | | 2637.8 | 21.50 | 20.51 | / | 22.5 | 21.5 | / |
| | | 2593.0 | 21.56 | 20.58 | / | 22.5 | 21.5 | / |
| | | 2548.3 | 21.58 | 20.57 | / | 22.5 | 21.5 | / |
| | | 2503.5 | 21.50 | 20.49 | / | 22.5 | 21.5 | / |
| | 1RB_0 | 2682.5 | 21.35 | 20.38 | / | 22.5 | 21.5 | / |
| | | 2637.8 | 21.44 | 20.47 | / | 22.5 | 21.5 | / |
| | | 2593.0 | 21.46 | 20.46 | / | 22.5 | 21.5 | / |
| | | 2548.3 | 21.41 | 20.47 | / | 22.5 | 21.5 | / |
| | | 2503.5 | 21.36 | 20.38 | / | 22.5 | 21.5 | / |
| | 36RB_38 | 2682.5 | 20.43 | 19.34 | / | 21.5 | 20.5 | / |
| | | 2637.8 | 20.47 | 19.36 | / | 21.5 | 20.5 | / |
| | | 2593.0 | 20.58 | 19.41 | / | 21.5 | 20.5 | / |
| | | 2548.3 | 20.55 | 19.45 | / | 21.5 | 20.5 | / |
| | | 2503.5 | 20.43 | 19.34 | / | 21.5 | 20.5 | / |
| | 36RB_19 | 2682.5 | 20.48 | 19.35 | / | 21.5 | 20.5 | / |
| | | 2637.8 | 20.55 | 19.45 | / | 21.5 | 20.5 | / |
| | | 2593.0 | 20.60 | 19.50 | / | 21.5 | 20.5 | / |
| | | 2548.3 | 20.57 | 19.44 | / | 21.5 | 20.5 | / |
| | | 2503.5 | 20.49 | 19.42 | / | 21.5 | 20.5 | / |
| 36RB_0 | 2682.5 | 20.45 | 19.36 | / | 21.5 | 20.5 | / | |
| | 2637.8 | 20.57 | 19.44 | / | 21.5 | 20.5 | / | |
| | 2593.0 | 20.51 | 19.42 | / | 21.5 | 20.5 | / | |
| | 2548.3 | 20.57 | 19.43 | / | 21.5 | 20.5 | / | |
| | 2503.5 | 20.51 | 19.42 | / | 21.5 | 20.5 | / | |
| 75RB_0 | 2682.5 | 20.38 | 19.35 | / | 21.5 | 20.5 | / | |
| | 2637.8 | 20.38 | 19.37 | / | 21.5 | 20.5 | / | |
| | 2593.0 | 20.44 | 19.40 | / | 21.5 | 20.5 | / | |
| | 2548.3 | 20.45 | 19.39 | / | 21.5 | 20.5 | / | |
| | 2503.5 | 20.36 | 19.35 | / | 21.5 | 20.5 | / | |



| Full Power | | | | | | | | |
|-------------|--------------------|-----------------|---------------------------|-------|-------|------------|-------|-------|
| LTE Band 41 | | | Actual output Power (dBm) | | | Tune up | | |
| Band -width | RB No. / RB offset | Frequency (MHz) | Modulation | | | Modulation | | |
| | | | QPSK | 16QAM | 64QAM | QPSK | 16QAM | 64QAM |
| 20 MHz | 1RB_99 | 2680.0 | 21.29 | 20.31 | / | 22.5 | 21.5 | / |
| | | 2636.5 | 21.33 | 20.32 | / | 22.5 | 21.5 | / |
| | | 2593.0 | 21.37 | 20.40 | / | 22.5 | 21.5 | / |
| | | 2549.5 | 21.40 | 20.42 | / | 22.5 | 21.5 | / |
| | | 2506.0 | 21.29 | 20.31 | / | 22.5 | 21.5 | / |
| | 1RB_50 | 2680.0 | 21.43 | 20.54 | / | 22.5 | 21.5 | / |
| | | 2636.5 | 21.61 | 20.60 | / | 22.5 | 21.5 | / |
| | | 2593.0 | 21.56 | 20.61 | / | 22.5 | 21.5 | / |
| | | 2549.5 | 21.58 | 20.58 | / | 22.5 | 21.5 | / |
| | | 2506.0 | 21.54 | 20.59 | / | 22.5 | 21.5 | / |
| | 1RB_0 | 2680.0 | 21.26 | 20.33 | / | 22.5 | 21.5 | / |
| | | 2636.5 | 21.40 | 20.44 | / | 22.5 | 21.5 | / |
| | | 2593.0 | 21.36 | 20.44 | / | 22.5 | 21.5 | / |
| | | 2549.5 | 21.40 | 20.41 | / | 22.5 | 21.5 | / |
| | | 2506.0 | 21.33 | 20.33 | / | 22.5 | 21.5 | / |
| | 50RB_50 | 2680.0 | 20.21 | 19.22 | / | 21.5 | 20.5 | / |
| | | 2636.5 | 20.39 | 19.35 | / | 21.5 | 20.5 | / |
| | | 2593.0 | 20.47 | 19.46 | / | 21.5 | 20.5 | / |
| | | 2549.5 | 20.42 | 19.41 | / | 21.5 | 20.5 | / |
| | | 2506.0 | 20.21 | 19.20 | / | 21.5 | 20.5 | / |
| | 50RB_25 | 2680.0 | 20.36 | 19.31 | / | 21.5 | 20.5 | / |
| | | 2636.5 | 20.42 | 19.39 | / | 21.5 | 20.5 | / |
| | | 2593.0 | 20.43 | 19.42 | / | 21.5 | 20.5 | / |
| | | 2549.5 | 20.42 | 19.39 | / | 21.5 | 20.5 | / |
| | | 2506.0 | 20.34 | 19.33 | / | 21.5 | 20.5 | / |
| 50RB_0 | 2680.0 | 20.36 | 19.31 | / | 21.5 | 20.5 | / | |
| | 2636.5 | 20.37 | 19.37 | / | 21.5 | 20.5 | / | |
| | 2593.0 | 20.31 | 19.32 | / | 21.5 | 20.5 | / | |
| | 2549.5 | 20.41 | 19.35 | / | 21.5 | 20.5 | / | |
| | 2506.0 | 20.42 | 19.42 | / | 21.5 | 20.5 | / | |
| 100RB_0 | 2680.0 | 20.38 | 19.35 | / | 21.5 | 20.5 | / | |
| | 2636.5 | 20.45 | 19.44 | / | 21.5 | 20.5 | / | |
| | 2593.0 | 20.49 | 19.47 | / | 21.5 | 20.5 | / | |
| | 2549.5 | 20.49 | 19.49 | / | 21.5 | 20.5 | / | |
| | 2506.0 | 20.42 | 19.41 | / | 21.5 | 20.5 | / | |



| Sensor on | | | | | | | | |
|-------------|--------------------|-----------------|---------------------------|-------|-------|------------|-------|-------|
| LTE Band 41 | | | Actual output Power (dBm) | | | Tune up | | |
| Band -width | RB No. / RB offset | Frequency (MHz) | Modulation | | | Modulation | | |
| | | | QPSK | 16QAM | 64QAM | QPSK | 16QAM | 64QAM |
| 5 MHz | 1RB_24 | 2687.5 | 17.37 | 17.42 | / | 18.5 | 18.5 | / |
| | | 2640.3 | 17.28 | 17.30 | / | 18.5 | 18.5 | / |
| | | 2593.0 | 17.30 | 17.39 | / | 18.5 | 18.5 | / |
| | | 2545.8 | 17.32 | 17.39 | / | 18.5 | 18.5 | / |
| | | 2498.5 | 17.20 | 17.28 | / | 18.5 | 18.5 | / |
| | 1RB_12 | 2687.5 | 17.57 | 17.64 | / | 18.5 | 18.5 | / |
| | | 2640.3 | 17.47 | 17.55 | / | 18.5 | 18.5 | / |
| | | 2593.0 | 17.54 | 17.54 | / | 18.5 | 18.5 | / |
| | | 2545.8 | 17.55 | 17.66 | / | 18.5 | 18.5 | / |
| | | 2498.5 | 17.40 | 17.49 | / | 18.5 | 18.5 | / |
| | 1RB_0 | 2687.5 | 17.39 | 17.44 | / | 18.5 | 18.5 | / |
| | | 2640.3 | 17.28 | 17.33 | / | 18.5 | 18.5 | / |
| | | 2593.0 | 17.27 | 17.36 | / | 18.5 | 18.5 | / |
| | | 2545.8 | 17.31 | 17.41 | / | 18.5 | 18.5 | / |
| | | 2498.5 | 17.21 | 17.29 | / | 18.5 | 18.5 | / |
| | 12RB_13 | 2687.5 | 17.50 | 17.38 | / | 18.5 | 18.5 | / |
| | | 2640.3 | 17.43 | 17.35 | / | 18.5 | 18.5 | / |
| | | 2593.0 | 17.38 | 17.36 | / | 18.5 | 18.5 | / |
| | | 2545.8 | 17.41 | 17.41 | / | 18.5 | 18.5 | / |
| | | 2498.5 | 17.32 | 17.26 | / | 18.5 | 18.5 | / |
| | 12RB_6 | 2687.5 | 17.57 | 17.48 | / | 18.5 | 18.5 | / |
| | | 2640.3 | 17.46 | 17.44 | / | 18.5 | 18.5 | / |
| | | 2593.0 | 17.47 | 17.43 | / | 18.5 | 18.5 | / |
| | | 2545.8 | 17.52 | 17.48 | / | 18.5 | 18.5 | / |
| | | 2498.5 | 17.38 | 17.28 | / | 18.5 | 18.5 | / |
| | 12RB_0 | 2687.5 | 17.48 | 17.45 | / | 18.5 | 18.5 | / |
| | | 2640.3 | 17.39 | 17.34 | / | 18.5 | 18.5 | / |
| | | 2593.0 | 17.36 | 17.31 | / | 18.5 | 18.5 | / |
| | | 2545.8 | 17.47 | 17.43 | / | 18.5 | 18.5 | / |
| | | 2498.5 | 17.30 | 17.24 | / | 18.5 | 18.5 | / |
| 25RB_0 | 2687.5 | 17.46 | 17.49 | / | 18.5 | 18.5 | / | |
| | 2640.3 | 17.38 | 17.37 | / | 18.5 | 18.5 | / | |
| | 2593.0 | 17.44 | 17.44 | / | 18.5 | 18.5 | / | |
| | 2545.8 | 17.50 | 17.52 | / | 18.5 | 18.5 | / | |
| | 2498.5 | 17.30 | 17.32 | / | 18.5 | 18.5 | / | |



| Sensor on | | | | | | | | |
|-------------|--------------------|-----------------|---------------------------|-------|-------|------------|-------|-------|
| LTE Band 41 | | | Actual output Power (dBm) | | | Tune up | | |
| Band -width | RB No. / RB offset | Frequency (MHz) | Modulation | | | Modulation | | |
| | | | QPSK | 16QAM | 64QAM | QPSK | 16QAM | 64QAM |
| 10 MHz | 1RB_49 | 2685.0 | 17.49 | 17.53 | / | 18.5 | 18.5 | / |
| | | 2639.0 | 17.38 | 17.45 | / | 18.5 | 18.5 | / |
| | | 2593.0 | 17.42 | 17.49 | / | 18.5 | 18.5 | / |
| | | 2547.0 | 17.42 | 17.47 | / | 18.5 | 18.5 | / |
| | | 2501.0 | 17.32 | 17.42 | / | 18.5 | 18.5 | / |
| | 1RB_24 | 2685.0 | 17.58 | 17.62 | / | 18.5 | 18.5 | / |
| | | 2639.0 | 17.50 | 17.57 | / | 18.5 | 18.5 | / |
| | | 2593.0 | 17.51 | 17.60 | / | 18.5 | 18.5 | / |
| | | 2547.0 | 17.57 | 17.62 | / | 18.5 | 18.5 | / |
| | | 2501.0 | 17.38 | 17.49 | / | 18.5 | 18.5 | / |
| | 1RB_0 | 2685.0 | 17.47 | 17.53 | / | 18.5 | 18.5 | / |
| | | 2639.0 | 17.40 | 17.45 | / | 18.5 | 18.5 | / |
| | | 2593.0 | 17.40 | 17.45 | / | 18.5 | 18.5 | / |
| | | 2547.0 | 17.42 | 17.49 | / | 18.5 | 18.5 | / |
| | | 2501.0 | 17.32 | 17.41 | / | 18.5 | 18.5 | / |
| | 25RB_25 | 2685.0 | 17.46 | 17.48 | / | 18.5 | 18.5 | / |
| | | 2639.0 | 17.45 | 17.47 | / | 18.5 | 18.5 | / |
| | | 2593.0 | 17.47 | 17.47 | / | 18.5 | 18.5 | / |
| | | 2547.0 | 17.40 | 17.49 | / | 18.5 | 18.5 | / |
| | | 2501.0 | 17.26 | 17.30 | / | 18.5 | 18.5 | / |
| | 25RB_12 | 2685.0 | 17.47 | 17.58 | / | 18.5 | 18.5 | / |
| | | 2639.0 | 17.43 | 17.44 | / | 18.5 | 18.5 | / |
| | | 2593.0 | 17.42 | 17.47 | / | 18.5 | 18.5 | / |
| | | 2547.0 | 17.54 | 17.52 | / | 18.5 | 18.5 | / |
| | | 2501.0 | 17.33 | 17.34 | / | 18.5 | 18.5 | / |
| 25RB_0 | 2685.0 | 17.49 | 17.58 | / | 18.5 | 18.5 | / | |
| | 2639.0 | 17.43 | 17.43 | / | 18.5 | 18.5 | / | |
| | 2593.0 | 17.39 | 17.40 | / | 18.5 | 18.5 | / | |
| | 2547.0 | 17.52 | 17.50 | / | 18.5 | 18.5 | / | |
| | 2501.0 | 17.31 | 17.40 | / | 18.5 | 18.5 | / | |
| 50RB_0 | 2685.0 | 17.45 | 17.46 | / | 18.5 | 18.5 | / | |
| | 2639.0 | 17.42 | 17.40 | / | 18.5 | 18.5 | / | |
| | 2593.0 | 17.38 | 17.39 | / | 18.5 | 18.5 | / | |
| | 2547.0 | 17.35 | 17.41 | / | 18.5 | 18.5 | / | |
| | 2501.0 | 17.26 | 17.29 | / | 18.5 | 18.5 | / | |



| Sensor on | | | | | | | | |
|-------------|--------------------|-----------------|---------------------------|-------|-------|------------|-------|-------|
| LTE Band 41 | | | Actual output Power (dBm) | | | Tune up | | |
| Band -width | RB No. / RB offset | Frequency (MHz) | Modulation | | | Modulation | | |
| | | | QPSK | 16QAM | 64QAM | QPSK | 16QAM | 64QAM |
| 15 MHz | 1RB_74 | 2682.5 | 17.35 | 17.45 | / | 18.5 | 18.5 | / |
| | | 2637.8 | 17.29 | 17.35 | / | 18.5 | 18.5 | / |
| | | 2593.0 | 17.37 | 17.42 | / | 18.5 | 18.5 | / |
| | | 2548.3 | 17.36 | 17.41 | / | 18.5 | 18.5 | / |
| | | 2503.5 | 17.25 | 17.35 | / | 18.5 | 18.5 | / |
| | 1RB_37 | 2682.5 | 17.47 | 17.54 | / | 18.5 | 18.5 | / |
| | | 2637.8 | 17.40 | 17.42 | / | 18.5 | 18.5 | / |
| | | 2593.0 | 17.39 | 17.49 | / | 18.5 | 18.5 | / |
| | | 2548.3 | 17.45 | 17.50 | / | 18.5 | 18.5 | / |
| | | 2503.5 | 17.37 | 17.38 | / | 18.5 | 18.5 | / |
| | 1RB_0 | 2682.5 | 17.36 | 17.44 | / | 18.5 | 18.5 | / |
| | | 2637.8 | 17.36 | 17.38 | / | 18.5 | 18.5 | / |
| | | 2593.0 | 17.34 | 17.41 | / | 18.5 | 18.5 | / |
| | | 2548.3 | 17.32 | 17.41 | / | 18.5 | 18.5 | / |
| | | 2503.5 | 17.27 | 17.35 | / | 18.5 | 18.5 | / |
| | 36RB_38 | 2682.5 | 17.46 | 17.38 | / | 18.5 | 18.5 | / |
| | | 2637.8 | 17.40 | 17.34 | / | 18.5 | 18.5 | / |
| | | 2593.0 | 17.45 | 17.41 | / | 18.5 | 18.5 | / |
| | | 2548.3 | 17.43 | 17.38 | / | 18.5 | 18.5 | / |
| | | 2503.5 | 17.38 | 17.24 | / | 18.5 | 18.5 | / |
| | 36RB_19 | 2682.5 | 17.48 | 17.44 | / | 18.5 | 18.5 | / |
| | | 2637.8 | 17.42 | 17.35 | / | 18.5 | 18.5 | / |
| | | 2593.0 | 17.47 | 17.39 | / | 18.5 | 18.5 | / |
| | | 2548.3 | 17.53 | 17.46 | / | 18.5 | 18.5 | / |
| | | 2503.5 | 17.39 | 17.35 | / | 18.5 | 18.5 | / |
| | 36RB_0 | 2682.5 | 17.51 | 17.46 | / | 18.5 | 18.5 | / |
| | | 2637.8 | 17.44 | 17.29 | / | 18.5 | 18.5 | / |
| | | 2593.0 | 17.39 | 17.32 | / | 18.5 | 18.5 | / |
| | | 2548.3 | 17.46 | 17.31 | / | 18.5 | 18.5 | / |
| | | 2503.5 | 17.36 | 17.38 | / | 18.5 | 18.5 | / |
| 75RB_0 | 2682.5 | 17.41 | 17.38 | / | 18.5 | 18.5 | / | |
| | 2637.8 | 17.33 | 17.29 | / | 18.5 | 18.5 | / | |
| | 2593.0 | 17.34 | 17.37 | / | 18.5 | 18.5 | / | |
| | 2548.3 | 17.33 | 17.33 | / | 18.5 | 18.5 | / | |
| | 2503.5 | 17.22 | 17.27 | / | 18.5 | 18.5 | / | |



| Sensor on | | | | | | | | |
|-------------|--------------------|-----------------|---------------------------|-------|-------|------------|-------|-------|
| LTE Band 41 | | | Actual output Power (dBm) | | | Tune up | | |
| Band -width | RB No. / RB offset | Frequency (MHz) | Modulation | | | Modulation | | |
| | | | QPSK | 16QAM | 64QAM | QPSK | 16QAM | 64QAM |
| 20 MHz | 1RB_99 | 2680.0 | 17.32 | 17.39 | / | 18.5 | 18.5 | / |
| | | 2636.5 | 17.27 | 17.33 | / | 18.5 | 18.5 | / |
| | | 2593.0 | 17.26 | 17.34 | / | 18.5 | 18.5 | / |
| | | 2549.5 | 17.28 | 17.35 | / | 18.5 | 18.5 | / |
| | | 2506.0 | 17.21 | 17.32 | / | 18.5 | 18.5 | / |
| | 1RB_50 | 2680.0 | 17.56 | 17.62 | / | 18.5 | 18.5 | / |
| | | 2636.5 | 17.46 | 17.52 | / | 18.5 | 18.5 | / |
| | | 2593.0 | 17.54 | 17.62 | / | 18.5 | 18.5 | / |
| | | 2549.5 | 17.55 | 17.59 | / | 18.5 | 18.5 | / |
| | | 2506.0 | 17.37 | 17.44 | / | 18.5 | 18.5 | / |
| | 1RB_0 | 2680.0 | 17.28 | 17.33 | / | 18.5 | 18.5 | / |
| | | 2636.5 | 17.32 | 17.37 | / | 18.5 | 18.5 | / |
| | | 2593.0 | 17.28 | 17.36 | / | 18.5 | 18.5 | / |
| | | 2549.5 | 17.31 | 17.42 | / | 18.5 | 18.5 | / |
| | | 2506.0 | 17.21 | 17.28 | / | 18.5 | 18.5 | / |
| | 50RB_50 | 2680.0 | 17.29 | 17.31 | / | 18.5 | 18.5 | / |
| | | 2636.5 | 17.31 | 17.33 | / | 18.5 | 18.5 | / |
| | | 2593.0 | 17.35 | 17.39 | / | 18.5 | 18.5 | / |
| | | 2549.5 | 17.31 | 17.34 | / | 18.5 | 18.5 | / |
| | | 2506.0 | 17.13 | 17.15 | / | 18.5 | 18.5 | / |
| | 50RB_25 | 2680.0 | 17.32 | 17.39 | / | 18.5 | 18.5 | / |
| | | 2636.5 | 17.29 | 17.35 | / | 18.5 | 18.5 | / |
| | | 2593.0 | 17.37 | 17.34 | / | 18.5 | 18.5 | / |
| | | 2549.5 | 17.38 | 17.43 | / | 18.5 | 18.5 | / |
| | | 2506.0 | 17.27 | 17.32 | / | 18.5 | 18.5 | / |
| 50RB_0 | 2680.0 | 17.43 | 17.41 | / | 18.5 | 18.5 | / | |
| | 2636.5 | 17.28 | 17.28 | / | 18.5 | 18.5 | / | |
| | 2593.0 | 17.22 | 17.28 | / | 18.5 | 18.5 | / | |
| | 2549.5 | 17.39 | 17.41 | / | 18.5 | 18.5 | / | |
| | 2506.0 | 17.28 | 17.35 | / | 18.5 | 18.5 | / | |
| 100RB_0 | 2680.0 | 17.47 | 17.42 | / | 18.5 | 18.5 | / | |
| | 2636.5 | 17.36 | 17.37 | / | 18.5 | 18.5 | / | |
| | 2593.0 | 17.40 | 17.42 | / | 18.5 | 18.5 | / | |
| | 2549.5 | 17.46 | 17.46 | / | 18.5 | 18.5 | / | |
| | 2506.0 | 17.27 | 17.32 | / | 18.5 | 18.5 | / | |

10.4. Bluetooth and WLAN Measurement result

Table 10.4: The conducted Power measurement results for Bluetooth

| Bluetooth | Tune up | Averaged Power (dBm) | | |
|---------------|-------------|----------------------|-----------------|-----------------|
| Mode | | | | |
| GFSK | 9.5 | 8.89 | | |
| EDR2M-4_DQPSK | 9.0 | 8.13 | | |
| EDR3M-8DPSK | 9.0 | 8.20 | | |
| / | / | Ch.0 (2402MHz) | Ch.19 (2440MHz) | Ch.39 (2480MHz) |
| BLE(1M) | -2.0 | -3.70 | -2.80 | -4.70 |
| BLE(2M) | -2.0 | -4.00 | -3.10 | -5.00 |

Table 10.5: The conducted Power measurement results for WLAN 2.4G

| WLAN 2.4GHz | Tune up | Averaged Power (dBm) Duty Cycle: 100% | | |
|----------------|-------------|---------------------------------------|----------------|-----------------|
| Mode | | Ch.1 (2412MHz) | Ch.6 (2437Mhz) | Ch.11 (2462MHz) |
| 802.11b | 18.5 | 17.73 | 17.72 | 16.81 |
| 802.11g | 16.0 | 15.21 | 15.64 | 14.82 |
| 802.11n(20MHz) | 15.5 | 15.01 | 15.32 | 13.87 |
| / | / | Ch.3 (2422MHz) | Ch.6 (2437Mhz) | Ch.9 (2452MHz) |
| 802.11n(40MHz) | 15.0 | 13.11 | 14.52 | 10.21 |

Table 10.6: The conducted Power measurement results for WLAN 5G

| Full Power | | | | | | | | |
|--|-------------|-------------------|--------------------|--------------|-------------------|--------------------|--------------|--------------------|
| Averaged Power (dBm) Duty Cycle: 100% | | | | | | | | |
| Mode | 802.11a | 802.11n -20MHz | 802.11ac -20MHz | Mode | 802.11n -40MHz | 802.11ac -40MHz | Mode | 802.11ac -80MHz |
| Channel | 6Mbps | MCS0 | MCS0 | Channel | MCS0 | MCS0 | Channel | MCS0 |
| <U-NII-1> | | | | | | | | |
| Tune up | 16.0 | 14.0 | 16.0 | / | 13.0 | 13.0 | / | 11.0 |
| 36(5180MHz) | 15.43 | 13.68 | 14.20 | 38(5190MHz) | 12.54 | 12.56 | 42(5210MHz) | 9.75 |
| 40(5200MHz) | 15.67 | 13.47 | 14.50 | 46(5230MHz) | 12.36 | 12.59 | / | / |
| 48(5240MHz) | 15.48 | 13.38 | 14.65 | / | / | / | / | / |
| <U-NII-2A> | | | | | | | | |
| Tune up | 16.0 | 14.0 | 16.0 | / | 13.0 | 13.0 | / | 11.0 |
| 52(5260MHz) | 15.54 | 13.07 | 14.24 | 54(5270MHz) | 12.50 | 12.70 | 58(5290MHz) | 9.54 |
| 56(5280MHz) | 15.30 | 13.42 | 14.66 | 62(5310MHz) | 12.47 | 12.65 | / | / |
| 64(5320MHz) | 15.22 | 13.33 | 13.96 | / | / | / | / | / |
| <U-NII-2C> | | | | | | | | |
| Tune up | 16.0 | 14.0 | 16.0 | / | 13.0 | 13.0 | / | 11.0 |
| 100(5500MHz) | 14.94 | 12.96 | 13.96 | 102(5510MHz) | 11.93 | 11.89 | 106(5530MHz) | 9.09 |
| 120(5580MHz) | 15.30 | 12.71 | 14.55 | 126(5630MHz) | 12.37 | 12.35 | 138(5690MHz) | 8.83 |
| 140(5700MHz) | 14.32 | 12.80 | 13.83 | / | / | / | / | / |
| <U-NII-3> | | | | | | | | |
| Tune up | 14.0 | 14.0 | 14.0 | / | 13.5 | 13.5 | / | 13.5 |
| 149(5745MHz) | 12.93 | 12.97 | 12.96 | 151(5755MHz) | 12.64 | 12.82 | 155(5775MHz) | 12.36 |
| 157(5785MHz) | 13.05 | 13.11 | 13.11 | 159(5795MHz) | 12.77 | 12.71 | / | / |
| 165(5825MHz) | 13.19 | 13.07 | 13.09 | / | / | / | / | / |




| Sensor on | | | | | | | | |
|--|------------|-------------------|--------------------|--------------|-------------------|--------------------|--------------|--------------------|
| Averaged Power (dBm) Duty Cycle: 100% | | | | | | | | |
| Mode | 802.11a | 802.11n -20MHz | 802.11ac -20MHz | Mode | 802.11n -40MHz | 802.11ac -40MHz | Mode | 802.11ac -80MHz |
| Channel | 6Mbps | MCS0 | MCS0 | Channel | MCS0 | MCS0 | Channel | MCS0 |
| <U-NII-1> | | | | | | | | |
| Tune up | 6.5 | 5.0 | 6.0 | / | 4.0 | 4.0 | / | 2.0 |
| 36(5180MHz) | 5.84 | 3.98 | 4.70 | 38(5190MHz) | 2.91 | 2.88 | 42(5210MHz) | 0.37 |
| 40(5200MHz) | 5.91 | 3.76 | 4.84 | 46(5230MHz) | 2.78 | 2.92 | / | / |
| 48(5240MHz) | 5.79 | 3.72 | 4.96 | / | / | / | / | / |
| <U-NII-2A> | | | | | | | | |
| Tune up | 6.5 | 5.0 | 6.0 | / | 4.0 | 4.0 | / | 2.0 |
| 52(5260MHz) | 5.85 | 3.45 | 4.76 | 54(5270MHz) | 2.83 | 2.92 | 58(5290MHz) | 0.32 |
| 56(5280MHz) | 5.76 | 3.69 | 4.98 | 62(5310MHz) | 2.84 | 2.90 | / | / |
| 64(5320MHz) | 5.74 | 3.61 | 4.57 | / | / | / | / | / |
| <U-NII-2C> | | | | | | | | |
| Tune up | 8.0 | 6.0 | 7.0 | / | 5.0 | 5.0 | / | 2.5 |
| 100(5500MHz) | 6.78 | 4.84 | 5.71 | 102(5510MHz) | 3.89 | 3.76 | 106(5530MHz) | 1.87 |
| 120(5580MHz) | 6.89 | 4.65 | 6.09 | 126(5630MHz) | 4.06 | 4.18 | 138(5690MHz) | 0.74 |
| 140(5700MHz) | 6.80 | 4.67 | 5.58 | / | / | / | / | / |
| <U-NII-3> | | | | | | | | |
| Tune up | 6.0 | 6.0 | 6.0 | / | 5.5 | 5.5 | / | 5.0 |
| 149(5745MHz) | 5.01 | 4.85 | 4.87 | 151(5755MHz) | 4.47 | 4.57 | 155(5775MHz) | 4.12 |
| 157(5785MHz) | 5.09 | 5.01 | 5.05 | 159(5795MHz) | 4.59 | 4.53 | / | / |
| 165(5825MHz) | 5.16 | 4.92 | 4.91 | / | / | / | / | / |

11. Simultaneous TX SAR Considerations

11.1. Introduction

The following procedures adopted from “FCC SAR Considerations for Cell Phones with Multiple Transmitters” are applicable to handsets with built-in unlicensed transmitters such as 802.11 a/b/g and Bluetooth devices which may simultaneously transmit with the licensed transmitter. For this device, the BT and WLAN can transmit simultaneous with other transmitters.

11.2. Transmit Antenna Separation Distances

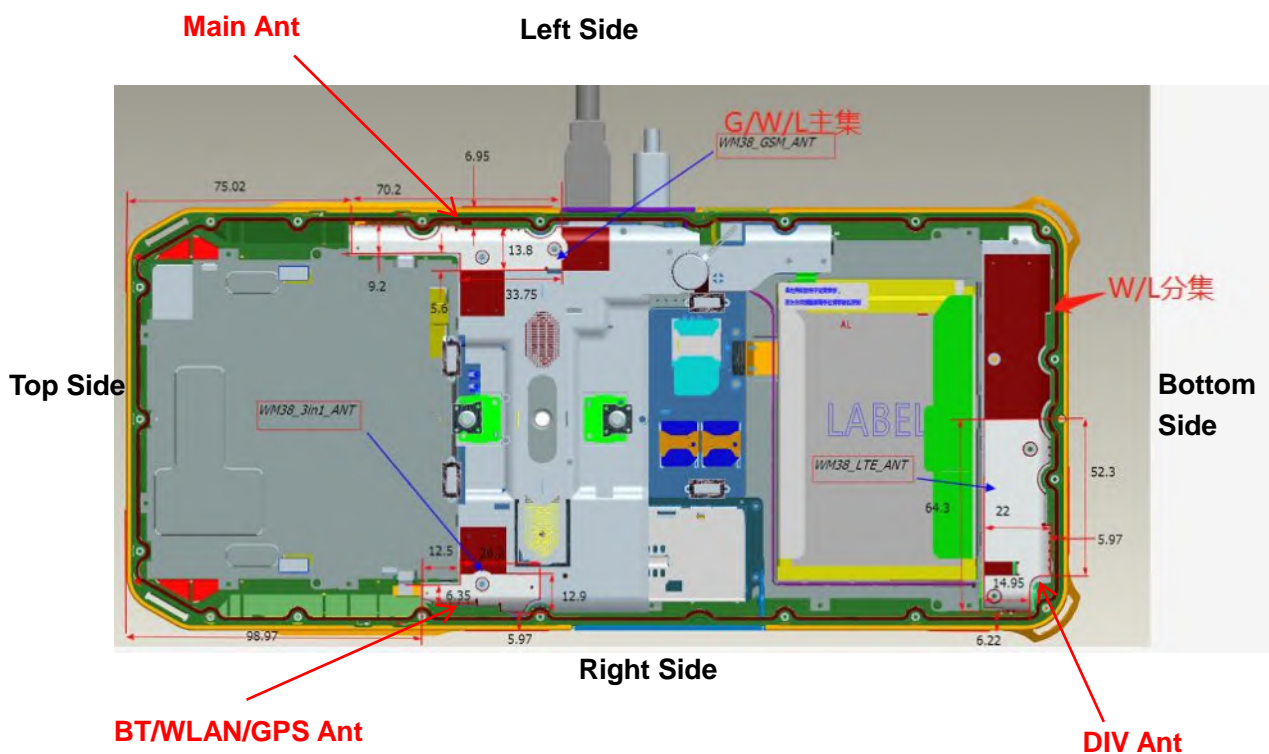

Picture 16: Antenna Locations (Back View)

11.3. SAR Measurement Positions

| SAR measurement positions | | | | | |
|---------------------------|------|-----------|------------|----------|-------------|
| Antenna | Rear | Left edge | Right edge | Top edge | Bottom edge |
| WWAN | Yes | Yes | No | Yes | No |
| WLAN | Yes | No | Yes | No | No |

Note:

1. Per KDB 447498 D01v06, the 1-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR, where

$f(\text{GHz})$ is the RF channel transmit frequency in GHz

Power and distance are rounded to the nearest mW and mm before calculation

2. Per KDB 447498 D01v06, For 100 MHz to 6 GHz and *test separation distances* > 50 mm, the 1-g and 10-g SAR test exclusion thresholds are determined by the following

1) $\{[\text{Power allowed at numeric threshold for 50 mm in step a)}] + [(\text{test separation distance} - 50 \text{ mm}) \cdot (f(\text{MHz})/150)]\}$ mW, for 100 MHz to 1500 MHz

2) $\{[\text{Power allowed at numeric threshold for 50 mm in step a)}] + [(\text{test separation distance} - 50 \text{ mm}) \cdot 10]\}$ mW, for > 1500 MHz and ≤ 6 GHz

11.4. Standalone SAR Test Exclusion Considerations

Standalone 1-g head or body SAR evaluation by measurement or numerical simulation is not required when the corresponding SAR Exclusion Threshold condition, listed below, is satisfied.

The 1-g SAR test exclusion threshold for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR, where

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

Table 11.1: Standalone SAR test exclusion considerations

| Band | f(GHz) | Position | SAR test exclusion threshold (mW) | RF output power | | SAR test exclusion |
|-----------|--------|----------|-----------------------------------|-----------------|------|--------------------|
| | | | | dBm | mW | |
| Bluetooth | 2.441 | Body | 9.60 | 9.5 | 8.91 | Yes |

12. Evaluation of Simultaneous

Table 12.1: The sum of reported SAR values for WWAN antenna and WLAN antenna

| / | Position | WWAN (W/kg) | WLAN (W/kg) | Sum (W/kg) |
|-------------------------------------|----------|-------------|-------------|------------|
| Highest reported SAR value for Body | Rear | 1.05 | 0.46 | 1.51 |

Note: the test positions of above tables are for the worse case that has been evaluated.

Table 12.2: The sum of reported SAR values for WWAN antenna and Bluetooth antenna

| / | Position | WWAN (W/kg) | Bluetooth (W/kg) | Sum (W/kg) |
|-------------------------------------|----------|-------------|------------------|------------|
| Highest reported SAR value for Body | Rear | 1.05 | 0.37 | 1.42 |

Note: the test positions of above tables are for the worse case that has been evaluated.

Table 12.3: Estimated SAR for Bluetooth

| Position | f (GHz) | Distance (mm) | Upper limit of power * | | Estimated _{1g} (W/kg) |
|----------|---------|---------------|------------------------|------|--------------------------------|
| | | | dBm | mW | |
| Body | 2.441 | 5 | 9.5 | 8.91 | 0.37 |

* - Maximum possible output power declared by manufacturer

Conclusion:

According to the above tables, the sum of reported SAR values is 1.51 W/kg. So the simultaneous transmission SAR with volume scans is not required.

13. Summary of Test Results

According to the client's decision rule in the test registration form, which is "based on the measurement results as the basis of the conformity statement", the test conclusion of this report meets the limit requirements.

The calculated SAR is obtained by the following formula:

$$\text{Reported SAR} = \text{Measured SAR} \times 10^{(P_{\text{Target}} - P_{\text{Measured}})/10}$$

Where P_{Target} is the power of manufacturing upper limit;

P_{Measured} is the measured power in chapter 10.

Duty Cycle

| Mode | Duty Cycle |
|--|------------|
| GPRS for GSM850/1900 (Full Power mode) | 1:2 |
| GPRS for GSM850/1900 (Sensor on mode) | 1:4 |
| WCDMA Band 2/5 | 1:1 |
| FDD_LTE Band 2/4/5/7 | 1:1 |
| TDD_LTE Band 38/41 | 1:1.58 |

13.1. Testing Environment

| | |
|-----------------------------|--------------|
| Temperature: | 18°C~25°C |
| Relative humidity: | 30%~70% |
| Ground system resistance: | <4Ω |
| Ambient noise & Reflection: | < 0.012 W/kg |

13.2. SAR results

Table 13.1: SAR Values (GSM 850 - Body)

| Frequency | | Test Mode | Test Position | Figure No./ Note | Conducted Power (dBm) | Max. tune-up Power (dBm) | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift(dB) |
|-----------------------------|-------|-----------|---------------|------------------|-----------------------|--------------------------|-------------------------|-------------------------|-----------------|
| Ch. | MHz | | | | | | | | |
| 0mm Test Data | | | | | | | | | |
| 128 | 824.2 | GPRS-2 | Rear | 1 | 26.35 | 27.0 | 0.646 | 0.75 | 0.06 |
| 128 | 824.2 | GPRS-2 | Left | / | 26.35 | 27.0 | 0.455 | 0.53 | 0.07 |
| 128 | 824.2 | GPRS-4 | Top | / | 29.43 | 30.5 | 0.239 | 0.31 | -0.02 |
| Sensor off Test Data | | | | | | | | | |
| 128 | 824.2 | GPRS-4 | Rear | Note1 | 29.43 | 30.5 | 0.303 | 0.39 | 0.04 |
| 128 | 824.2 | GPRS-4 | Left | Note2 | 29.43 | 30.5 | 0.254 | 0.32 | 0.12 |

Note1: The distance between the EUT and the phantom bottom is 19mm.

Note2: The distance between the EUT and the phantom bottom is 17mm.

Table 13.2: SAR Values (GSM 1900 - Body)

| Frequency | | Test Mode | Test Position | Figure No./ Note | Conducted Power (dBm) | Max. tune-up Power (dBm) | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift(dB) |
|-----------------------------|--------|-----------|---------------|------------------|-----------------------|--------------------------|-------------------------|-------------------------|-----------------|
| Ch. | MHz | | | | | | | | |
| 0mm Test Data | | | | | | | | | |
| 512 | 1850.2 | GPRS-2 | Rear | 2 | 23.43 | 24.5 | 0.679 | 0.87 | -0.03 |
| 512 | 1850.2 | GPRS-2 | Left | / | 23.43 | 24.5 | 0.213 | 0.27 | -0.11 |
| 512 | 1850.2 | GPRS-4 | Top | / | 26.50 | 27.5 | 0.162 | 0.20 | -0.07 |
| 810 | 1909.8 | GPRS-2 | Rear | / | 22.92 | 24.5 | 0.504 | 0.73 | 0.03 |
| 661 | 1880.0 | GPRS-2 | Rear | / | 23.14 | 24.5 | 0.571 | 0.78 | 0.03 |
| Sensor off Test Data | | | | | | | | | |
| 512 | 1850.2 | GPRS-4 | Rear | Note1 | 26.50 | 27.5 | 0.384 | 0.48 | 0.05 |
| 512 | 1850.2 | GPRS-4 | Left | Note2 | 26.50 | 27.5 | 0.209 | 0.26 | 0.12 |

Note1: The distance between the EUT and the phantom bottom is 19mm.

Note2: The distance between the EUT and the phantom bottom is 17mm.

Table 13.3: SAR Values (WCDMA Band 2 - Body)

| Frequency | | Test Mode | Test Position | Figure No./ Note | Conducted Power (dBm) | Max. tune-up Power (dBm) | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift(dB) |
|-----------------------------|--------|-----------|---------------|------------------|-----------------------|--------------------------|-------------------------|-------------------------|-----------------|
| Ch. | MHz | | | | | | | | |
| 0mm Test Data | | | | | | | | | |
| 9400 | 1880.0 | RMC | Rear | / | 18.30 | 19.0 | 0.520 | 0.61 | 0.07 |
| 9400 | 1880.0 | RMC | Left | / | 18.30 | 19.0 | 0.294 | 0.35 | 0.15 |
| 9400 | 1880.0 | RMC | Top | / | 22.20 | 23.5 | 0.282 | 0.38 | 0.14 |
| Sensor off Test Data | | | | | | | | | |
| 9400 | 1880.0 | RMC | Rear | 3/Note1 | 22.20 | 23.5 | 0.567 | 0.76 | 0.03 |
| 9400 | 1880.0 | RMC | Left | Note2 | 22.20 | 23.5 | 0.289 | 0.39 | 0.05 |

Note1: The distance between the EUT and the phantom bottom is 19mm.

Note2: The distance between the EUT and the phantom bottom is 17mm.

Table 13.4: SAR Values (WCDMA Band 5 -Body)

| Frequency | | Test Mode | Test Position | Figure No./ Note | Conducted Power (dBm) | Max. tune-up Power (dBm) | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift(dB) |
|-----------------------------|-------|-----------|---------------|------------------|-----------------------|--------------------------|-------------------------|-------------------------|-----------------|
| Ch. | MHz | | | | | | | | |
| 0mm Test Data | | | | | | | | | |
| 4183 | 836.6 | RMC | Rear | 4 | 19.60 | 20.5 | 0.422 | 0.52 | 0.05 |
| 4183 | 836.6 | RMC | Left | / | 19.60 | 20.5 | 0.421 | 0.52 | -0.14 |
| 4183 | 836.6 | RMC | Top | / | 22.70 | 23.5 | 0.175 | 0.21 | -0.18 |
| Sensor off Test Data | | | | | | | | | |
| 4183 | 836.6 | RMC | Rear | Note1 | 22.70 | 23.5 | 0.295 | 0.35 | 0.03 |
| 4183 | 836.6 | RMC | Left | Note2 | 22.70 | 23.5 | 0.124 | 0.15 | 0.12 |

Note1: The distance between the EUT and the phantom bottom is 19mm.

Note2: The distance between the EUT and the phantom bottom is 17mm.

Table 13.5: SAR Values (LTE Band 2 - Body)

| Frequency | | Test Mode | Test Position | Figure No./ Note | Conducted Power (dBm) | Max. tune-up Power (dBm) | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift(dB) |
|-----------------------------|--------|-----------|---------------|------------------|-----------------------|--------------------------|-------------------------|-------------------------|-----------------|
| Ch. | MHz | | | | | | | | |
| 0mm Test Data | | | | | | | | | |
| 19100 | 1900.0 | 1RB50 | Rear | / | 18.50 | 19.5 | 0.554 | 0.70 | 0.01 |
| 19100 | 1900.0 | 50RB25 | Rear | 5 | 18.54 | 19.5 | 0.568 | 0.71 | 0.02 |
| 19100 | 1900.0 | 1RB50 | Left | / | 18.50 | 19.5 | 0.473 | 0.60 | -0.06 |
| 19100 | 1900.0 | 50RB25 | Left | / | 18.54 | 19.5 | 0.472 | 0.59 | 0.06 |
| 18900 | 1880.0 | 1RB50 | Top | / | 23.68 | 24.5 | 0.325 | 0.39 | 0.17 |
| 18700 | 1860.0 | 50RB25 | Top | / | 22.66 | 23.5 | 0.226 | 0.27 | 0.10 |
| Sensor off Test Data | | | | | | | | | |
| 18900 | 1880.0 | 1RB50 | Rear | Note1 | 23.68 | 24.5 | 0.525 | 0.63 | 0.08 |
| 18700 | 1860.0 | 50RB25 | Rear | Note1 | 22.66 | 23.5 | 0.414 | 0.50 | 0.02 |
| 18900 | 1880.0 | 1RB50 | Left | Note2 | 23.68 | 24.5 | 0.217 | 0.26 | -0.10 |
| 18700 | 1860.0 | 50RB25 | Left | Note2 | 22.66 | 23.5 | 0.156 | 0.19 | 0.03 |

Note1: The distance between the EUT and the phantom bottom is 19mm.

Note2: The distance between the EUT and the phantom bottom is 17mm.

Table 13.6: SAR Values (LTE Band 4 - Body)

| Frequency | | Test Mode | Test Position | Figure No./ Note | Conducted Power (dBm) | Max. tune-up Power (dBm) | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift(dB) |
|-----------------------------|--------|-----------|---------------|------------------|-----------------------|--------------------------|-------------------------|-------------------------|-----------------|
| Ch. | MHz | | | | | | | | |
| 0mm Test Data | | | | | | | | | |
| 20175 | 1732.5 | 1RB50 | Rear | / | 16.52 | 17.5 | 0.615 | 0.77 | 0.15 |
| 20050 | 1720.0 | 50RB25 | Rear | 6 | 16.45 | 17.5 | 0.675 | 0.86 | 0.07 |
| 20300 | 1745.0 | 50RB25 | Rear | / | 16.43 | 17.5 | 0.593 | 0.76 | 0.02 |
| 20175 | 1732.5 | 50RB25 | Rear | / | 16.44 | 17.5 | 0.623 | 0.80 | 0.18 |
| 20175 | 1732.5 | 100RB | Rear | / | 16.44 | 17.5 | 0.606 | 0.77 | 0.05 |
| 20175 | 1732.5 | 1RB50 | Left | / | 16.52 | 17.5 | 0.252 | 0.32 | -0.06 |
| 20050 | 1720.0 | 50RB25 | Left | / | 16.45 | 17.5 | 0.264 | 0.34 | -0.05 |
| 20300 | 1745.0 | 1RB50 | Top | / | 23.57 | 24.5 | 0.196 | 0.24 | 0.12 |
| 20300 | 1745.0 | 50RB25 | Top | / | 22.61 | 23.5 | 0.155 | 0.19 | 0.15 |
| Sensor off Test Data | | | | | | | | | |
| 20300 | 1745.0 | 1RB50 | Rear | Note1 | 23.57 | 24.5 | 0.308 | 0.38 | 0.05 |
| 20300 | 1745.0 | 50RB25 | Rear | Note1 | 22.61 | 23.5 | 0.261 | 0.32 | 0.02 |
| 20300 | 1745.0 | 1RB50 | Left | Note2 | 23.57 | 24.5 | 0.131 | 0.16 | -0.09 |
| 20300 | 1745.0 | 50RB25 | Left | Note2 | 22.61 | 23.5 | 0.098 | 0.12 | -0.01 |

Note1: The distance between the EUT and the phantom bottom is 19mm.

Note2: The distance between the EUT and the phantom bottom is 17mm.

Table 13.7: SAR Values (LTE Band 5 - Body)

| Frequency | | Test Mode | Test Position | Figure No./ Note | Conducted Power (dBm) | Max. tune-up Power (dBm) | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift(dB) |
|-----------------------------|-------|-----------|---------------|------------------|-----------------------|--------------------------|-------------------------|-------------------------|-----------------|
| Ch. | MHz | | | | | | | | |
| 0mm Test Data | | | | | | | | | |
| 20450 | 829.0 | 1RB24 | Rear | 7 | 20.87 | 21.5 | 0.528 | 0.61 | 0.02 |
| 20450 | 829.0 | 25RB0 | Rear | / | 20.87 | 21.5 | 0.523 | 0.60 | 0.15 |
| 20450 | 829.0 | 1RB | Left | / | 20.87 | 21.5 | 0.489 | 0.57 | -0.03 |
| 20450 | 829.0 | 25RB | Left | / | 20.87 | 21.5 | 0.284 | 0.33 | -0.01 |
| 20450 | 829.0 | 1RB24 | Top | / | 24.09 | 24.5 | 0.142 | 0.16 | -0.01 |
| 20525 | 829.0 | 25RB25 | Top | / | 23.02 | 23.5 | 0.107 | 0.12 | -0.02 |
| Sensor off Test Data | | | | | | | | | |
| 20450 | 829.0 | 1RB24 | Rear | Note1 | 24.09 | 24.5 | 0.297 | 0.33 | 0.01 |
| 20525 | 829.0 | 25RB25 | Rear | Note1 | 23.02 | 23.5 | 0.247 | 0.28 | 0.02 |
| 20450 | 829.0 | 1RB24 | Left | Note2 | 24.09 | 24.5 | 0.150 | 0.16 | -0.03 |
| 20525 | 829.0 | 25RB25 | Left | Note2 | 23.02 | 23.5 | 0.126 | 0.14 | 0.01 |

Note1: The distance between the EUT and the phantom bottom is 19mm.

Note2: The distance between the EUT and the phantom bottom is 17mm.

Table 13.8: SAR Values (LTE Band 7 - Body)

| Frequency | | Test Mode | Test Position | Figure No./ Note | Conducted Power (dBm) | Max. tune-up Power (dBm) | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift(dB) |
|-----------------------------|--------|-----------|---------------|------------------|-----------------------|--------------------------|-------------------------|-------------------------|-----------------|
| Ch. | MHz | | | | | | | | |
| 0mm Test Data | | | | | | | | | |
| 21350 | 2560.0 | 1RB50 | Rear | 8 | 13.51 | 14.5 | 0.355 | 0.45 | 0.01 |
| 21350 | 2560.0 | 50RB25 | Rear | / | 13.49 | 14.5 | 0.346 | 0.44 | 0.02 |
| 21350 | 2560.0 | 1RB50 | Left | / | 13.51 | 14.5 | 0.152 | 0.19 | 0.04 |
| 21350 | 2560.0 | 50RB25 | Left | / | 13.49 | 14.5 | 0.151 | 0.19 | -0.09 |
| 21350 | 2560.0 | 1RB50 | Top | / | 23.46 | 24.0 | 0.363 | 0.41 | 0.05 |
| 21350 | 2560.0 | 50RB25 | Top | / | 22.52 | 23.0 | 0.293 | 0.33 | 0.18 |
| Sensor off Test Data | | | | | | | | | |
| 21350 | 2560.0 | 1RB50 | Rear | Note1 | 23.46 | 24.0 | 0.334 | 0.38 | 0.04 |
| 21350 | 2560.0 | 50RB25 | Rear | Note1 | 22.52 | 23.0 | 0.225 | 0.25 | 0.01 |
| 21350 | 2560.0 | 1RB50 | Left | Note2 | 23.46 | 24.0 | 0.249 | 0.28 | -0.01 |
| 21350 | 2560.0 | 50RB25 | Left | Note2 | 22.52 | 23.0 | 0.189 | 0.21 | 0.11 |

Note1: The distance between the EUT and the phantom bottom is 19mm.

Note2: The distance between the EUT and the phantom bottom is 17mm.

Table 13.9: SAR Values (LTE Band 38 - Body)

| Frequency | | Test Mode | Test Position | Figure No./ Note | Conducted Power (dBm) | Max. tune-up Power (dBm) | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift(dB) |
|-----------------------------|--------|-----------|---------------|------------------|-----------------------|--------------------------|-------------------------|-------------------------|-----------------|
| Ch. | MHz | | | | | | | | |
| 0mm Test Data | | | | | | | | | |
| 38150 | 2610.0 | 1RB50 | Rear | / | 18.99 | 19.5 | 0.878 | 0.99 | -0.05 |
| 37850 | 2580.0 | 50RB50 | Rear | / | 18.82 | 19.5 | 0.837 | 0.98 | -0.09 |
| 38150 | 2610.0 | 1RB50 | Left | / | 18.99 | 19.5 | 0.372 | 0.42 | -0.03 |
| 37850 | 2580.0 | 50RB50 | Left | / | 18.82 | 19.5 | 0.346 | 0.40 | -0.01 |
| 38000 | 2595.0 | 1RB50 | Top | / | 23.00 | 24.0 | 0.185 | 0.23 | -0.10 |
| 38000 | 2595.0 | 50RB25 | Top | / | 21.91 | 23.0 | 0.151 | 0.19 | 0.05 |
| 37850 | 2580.0 | 1RB50 | Rear | / | 18.98 | 19.5 | 0.831 | 0.94 | 0.10 |
| 38000 | 2595.0 | 1RB50 | Rear | / | 18.92 | 19.5 | 0.870 | 0.99 | -0.15 |
| 38000 | 2595.0 | 50RB50 | Rear | 9 | 18.76 | 19.5 | 0.883 | 1.05 | 0.05 |
| 38150 | 2610.0 | 50RB50 | Rear | / | 18.78 | 19.5 | 0.878 | 1.04 | -0.17 |
| 37850 | 2580.0 | 100RB0 | Rear | / | 18.85 | 19.5 | 0.733 | 0.85 | 0.01 |
| Sensor off Test Data | | | | | | | | | |
| 38000 | 2595.0 | 2595.0 | Rear | Note1 | 23.00 | 24.0 | 0.204 | 0.26 | 0.05 |
| 38000 | 2595.0 | 50RB25 | Rear | Note1 | 21.91 | 23.0 | 0.118 | 0.15 | 0.02 |
| 38000 | 2595.0 | 2595.0 | Left | Note2 | 23.00 | 24.0 | 0.191 | 0.24 | -0.01 |
| 38000 | 2595.0 | 50RB25 | Left | Note2 | 21.91 | 23.0 | 0.136 | 0.17 | 0.02 |

Note1: The distance between the EUT and the phantom bottom is 19mm.

Note2: The distance between the EUT and the phantom bottom is 17mm.

Table 13.1: SAR Values (LTE Band 41 - Body)

| Frequency | | Test Mode | Test Position | Figure No./ Note | Conducted Power (dBm) | Max. tune-up Power (dBm) | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift(dB) |
|-----------------------------|--------|-----------|---------------|------------------|-----------------------|--------------------------|-------------------------|-------------------------|-----------------|
| Ch. | MHz | | | | | | | | |
| 0mm Test Data | | | | | | | | | |
| 41490 | 2680.0 | 1RB50 | Rear | 10 | 17.56 | 18.5 | 0.639 | 0.79 | 0.08 |
| 41490 | 2680.0 | 50RB0 | Rear | / | 17.43 | 18.5 | 0.621 | 0.79 | 0.04 |
| 41490 | 2680.0 | 1RB50 | Left | / | 17.56 | 18.5 | 0.357 | 0.44 | 0.17 |
| 41490 | 2680.0 | 50RB0 | Left | / | 17.43 | 18.5 | 0.344 | 0.44 | 0.13 |
| 41055 | 2636.5 | 1RB50 | Top | / | 21.61 | 22.5 | 0.178 | 0.22 | 0.15 |
| 40620 | 2593.0 | 50RB50 | Top | / | 20.47 | 21.5 | 0.139 | 0.18 | 0.20 |
| Sensor off Test Data | | | | | | | | | |
| 41055 | 2636.5 | 1RB50 | Rear | Note1 | 21.61 | 22.5 | 0.203 | 0.25 | 0.05 |
| 40620 | 2593.0 | 50RB50 | Rear | Note1 | 20.47 | 21.5 | 0.158 | 0.20 | 0.17 |
| 41055 | 2636.5 | 1RB50 | Left | Note2 | 21.61 | 22.5 | 0.168 | 0.21 | -0.02 |
| 40620 | 2593.0 | 50RB50 | Left | Note2 | 20.47 | 21.5 | 0.129 | 0.16 | -0.03 |

Note1: The distance between the EUT and the phantom bottom is 19mm.

Note2: The distance between the EUT and the phantom bottom is 17mm.

13.3. WLAN Evaluation for 2.4G

According to the KDB248227 D01, SAR is measured for 2.4GHz 802.11b DSSS using the initial test position procedure.

Table 13.1: SAR Values (WLAN 2.4G - Body)

| Frequency | | Test Mode | Test Position | Figure No./ Note | Conducted Power (dBm) | Max. tune-up Power (dBm) | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift(dB) |
|----------------------|--------|-----------|---------------|------------------|-----------------------|--------------------------|-------------------------|-------------------------|-----------------|
| Ch. | MHz | | | | | | | | |
| 0mm Test Data | | | | | | | | | |
| 1 | 2412.0 | 802.11b | Rear | / | 17.73 | 18.5 | 0.258 | 0.31 | 0.09 |
| 1 | 2412.0 | 802.11b | Right | 11 | 17.73 | 18.5 | 0.296 | 0.35 | -0.05 |

Note: For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.

According to the KDB248227 D01, The reported SAR must be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

Table 13.2: SAR Values (WLAN - Body) – 802.11b (Scaled Reported SAR)

| Frequency | | Test Position | Actual duty factor | maximum duty factor | Reported SAR (1g)(W/kg) | Scaled reported SAR (1g)(W/kg) |
|-----------|--------|---------------|--------------------|---------------------|-------------------------|--------------------------------|
| Ch. | MHz | | | | | |
| 1 | 2412.0 | Right | 100% | 100% | 0.35 | 0.35 |

SAR is not required for OFDM because the 802.11b adjusted SAR ≤ 1.2 W/kg.

13.4. WLAN Evaluation for 5G

Table 13.3: SAR Values (WLAN 5G - Body)

| Frequency | | Test Mode | Test Position | Figure No./ Note | Conducted Power (dBm) | Max. tune-up Power (dBm) | Measured SAR(1g) (W/kg) | Reported SAR(1g) (W/kg) | Power Drift(dB) |
|--|--------|-----------|---------------|------------------|-----------------------|--------------------------|-------------------------|-------------------------|-----------------|
| Ch. | MHz | | | | | | | | |
| U-NII-2A - 0mm Test Data | | | | | | | | | |
| 52 | 5260.0 | 802.11a | Rear | / | 5.85 | 6.5 | 0.340 | 0.39 | -0.02 |
| 52 | 5260.0 | 802.11a | Right | / | 5.85 | 6.5 | 0.110 | 0.13 | 0.03 |
| U-NII-2A - Sensor off Test Data | | | | | | | | | |
| 52 | 5260.0 | 802.11a | Rear | 12/Note1 | 15.54 | 16.0 | 0.440 | 0.49 | 0.08 |
| 52 | 5260.0 | 802.11a | Right | Note2 | 15.54 | 16.0 | 0.401 | 0.45 | 0.07 |
| U-NII-2C - 0mm Test Data | | | | | | | | | |
| 120 | 5600.0 | 802.11a | Rear | / | 6.89 | 8.0 | 0.357 | 0.46 | 0.09 |
| 120 | 5600.0 | 802.11a | Right | / | 6.89 | 8.0 | 0.151 | 0.19 | 0.03 |
| U-NII-2C - Sensor off Test Data | | | | | | | | | |
| 120 | 5600.0 | 802.11a | Rear | Note1 | 15.30 | 16.0 | 0.400 | 0.47 | 0.09 |
| 120 | 5600.0 | 802.11a | Right | Note2 | 15.30 | 16.0 | 0.374 | 0.44 | 0.03 |
| U-NII-3 - 0mm Test Data | | | | | | | | | |
| 165 | 5825.0 | 802.11a | Rear | / | 5.16 | 6.0 | 0.344 | 0.42 | 0.00 |
| 165 | 5825.0 | 802.11a | Right | / | 5.16 | 6.0 | 0.148 | 0.18 | 0.09 |
| U-NII-3 - Sensor off Test Data | | | | | | | | | |
| 165 | 5825.0 | 802.11a | Rear | Note1 | 13.19 | 14.0 | 0.352 | 0.42 | 0.15 |
| 165 | 5825.0 | 802.11a | Right | Note2 | 13.19 | 14.0 | 0.393 | 0.47 | -0.07 |

Note1: The distance between the EUT and the phantom bottom is 11mm.

Note2: The distance between the EUT and the phantom bottom is 9mm.

Note:

1. U-NII-1 and U-NII-2A bands have the same specified maximum output and tolerance; SAR is measured for U-NII-2A band first. Adjusted SAR of U-NII-2A band is $\leq 1.2\text{W/kg}$, SAR is not required for U-NII-1 band.
2. For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is $> 0.8\text{ W/kg}$, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel until the reported SAR is $\leq 1.2\text{ W/kg}$ or all required channels are tested.



According to the KDB248227 D01, The reported SAR must be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

Table 13.4: SAR Values (WLAN - Body) – 802.11a (Scaled Reported SAR)

| Frequency | | Test Position | Actual duty factor | maximum duty factor | Reported SAR (1g)(W/kg) | Scaled reported SAR (1g)(W/kg) |
|-----------|--------|---------------|--------------------|---------------------|-------------------------|--------------------------------|
| Ch. | MHz | | | | | |
| 52 | 5260.0 | Rear | 100% | 100% | 0.49 | 0.49 |

14. SAR Measurement Variability

SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium.

The following procedures are applied to determine if repeated measurements are required.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

Table 14.1: SAR Measurement Variability for Body – LTE Band 38

| Frequency | | Test Position | Original | 1 st Repeated | Ratio | 2 nd Repeated |
|-----------|--------|---------------|------------|--------------------------|-------|--------------------------|
| Ch. | MHz | | SAR (W/kg) | SAR (W/kg) | | SAR (W/kg) |
| 38000 | 2595.0 | Rear | 0.883 | 0.872 | 1.01 | / |

15. Measurement Uncertainty

15.1. Measurement Uncertainty for Normal SAR Tests (300MHz~3GHz)

| No. | Error Description | Type | Uncertainty value | Probably Distribution | Div. | (Ci) 1g | (Ci) 10g | Std. Unc. (1g) | Std. Unc. (10g) | Degree of freedom |
|--|---|--|-------------------|-----------------------|------------|--------------|--------------|----------------|-----------------|-------------------|
| Measurement system | | | | | | | | | | |
| 1 | Probe calibration | B | 12 | N | 2 | 1 | 1 | 6.0 | 6.0 | ∞ |
| 2 | Axial isotropy | B | 4.7 | R | $\sqrt{3}$ | $\sqrt{0.5}$ | $\sqrt{0.5}$ | 4.3 | 4.3 | ∞ |
| 3 | Hemispherical isotropy | B | 9.6 | R | $\sqrt{3}$ | 1 | 1 | 4.8 | 4.8 | ∞ |
| 4 | Boundary effect | B | 1.1 | R | $\sqrt{3}$ | 1 | 1 | 0.6 | 0.6 | ∞ |
| 5 | Linearity | B | 4.7 | R | $\sqrt{3}$ | 1 | 1 | 2.7 | 2.7 | ∞ |
| 6 | Detection limit | B | 1.0 | R | $\sqrt{3}$ | 1 | 1 | 0.6 | 0.6 | ∞ |
| 7 | Modulation response | B | 4.0 | R | $\sqrt{3}$ | 1 | 1 | 2.3 | 2.3 | ∞ |
| 8 | Readout electronics | B | 1.0 | N | 1 | 1 | 1 | 1.0 | 1.0 | ∞ |
| 9 | Response time | B | 0.8 | R | $\sqrt{3}$ | 1 | 1 | 0.5 | 0.5 | ∞ |
| 10 | Integration time | B | 1.7 | R | $\sqrt{3}$ | 1 | 1 | 1.0 | 1.0 | ∞ |
| 11 | RF ambient conditions-noise | B | 3.0 | R | $\sqrt{3}$ | 1 | 1 | 1.7 | 1.7 | ∞ |
| 12 | RF ambient conditions-reflection | B | 3.0 | R | $\sqrt{3}$ | 1 | 1 | 1.7 | 1.7 | ∞ |
| 13 | Probe positioned mech. restrictions | B | 0.35 | R | $\sqrt{3}$ | 1 | 1 | 0.2 | 0.2 | ∞ |
| 14 | Probe positioning with respect to phantom shell | B | 2.9 | R | $\sqrt{3}$ | 1 | 1 | 1.7 | 1.7 | ∞ |
| 15 | Post-processing | B | 1.0 | R | $\sqrt{3}$ | 1 | 1 | 0.6 | 0.6 | ∞ |
| Test sample related | | | | | | | | | | |
| 16 | Test sample positioning | A | 3.3 | N | 1 | 1 | 1 | 3.3 | 3.3 | 5 |
| 17 | Device holder uncertainty | A | 3.4 | N | 1 | 1 | 1 | 3.4 | 3.4 | 5 |
| 18 | Drift of output power | B | 5.0 | R | $\sqrt{3}$ | 1 | 1 | 2.9 | 2.9 | ∞ |
| Phantom and set-up | | | | | | | | | | |
| 19 | Phantom uncertainty | B | 1.0 | R | $\sqrt{3}$ | 1 | 1 | 0.6 | 0.6 | ∞ |
| 20 | Liquid conductivity (target) | B | 5.0 | R | $\sqrt{3}$ | 0.64 | 0.43 | 1.8 | 1.2 | ∞ |
| 21 | Liquid conductivity (meas.) | A | 1.3 | N | 1 | 0.64 | 0.43 | 0.83 | 0.56 | 9 |
| 22 | Liquid permittivity (target) | B | 5.0 | R | $\sqrt{3}$ | 0.6 | 0.49 | 1.7 | 1.4 | ∞ |
| 23 | Liquid permittivity (meas.) | A | 1.6 | N | 1 | 0.6 | 0.49 | 0.96 | 0.78 | 9 |
| Combined standard uncertainty | | $u_c = \sqrt{\sum_{i=1}^{23} c_i^2 u_i^2}$ | | | | | | 11.3 | 11.2 | 95.5 |
| Expanded uncertainty (Confidence interval of 95 %) | | $u_e = 2u_c$ | | | | | | 22.6 | 22.4 | |

15.2. Measurement Uncertainty for Normal SAR Tests (3GHz~6GHz)

| No. | Error Description | Type | Uncertainty value | Probably Distribution | Div. | (Ci) 1g | (Ci) 10g | Std. Unc. (1g) | Std. Unc. (10g) | Degree of freedom |
|---|---|--|-------------------|-----------------------|------------|--------------|--------------|----------------|-----------------|-------------------|
| Measurement system | | | | | | | | | | |
| 1 | Probe calibration | B | 13 | N | 2 | 1 | 1 | 6.5 | 6.5 | ∞ |
| 2 | Axial isotropy | B | 4.7 | R | $\sqrt{3}$ | $\sqrt{0.5}$ | $\sqrt{0.5}$ | 4.3 | 4.3 | ∞ |
| 3 | Hemispherical isotropy | B | 9.6 | R | $\sqrt{3}$ | 1 | 1 | 4.8 | 4.8 | ∞ |
| 4 | Boundary effect | B | 2.3 | R | $\sqrt{3}$ | 1 | 1 | 1.3 | 1.3 | ∞ |
| 5 | Linearity | B | 4.7 | R | $\sqrt{3}$ | 1 | 1 | 2.7 | 2.7 | ∞ |
| 6 | Detection limit | B | 1.0 | R | $\sqrt{3}$ | 1 | 1 | 0.6 | 0.6 | ∞ |
| 7 | Modulation response | B | 4.0 | R | $\sqrt{3}$ | 1 | 1 | 2.3 | 2.3 | ∞ |
| 8 | Readout electronics | B | 1.0 | N | 1 | 1 | 1 | 1.0 | 1.0 | ∞ |
| 9 | Response time | B | 0.8 | R | $\sqrt{3}$ | 1 | 1 | 0.5 | 0.5 | ∞ |
| 10 | Integration time | B | 1.7 | R | $\sqrt{3}$ | 1 | 1 | 1.0 | 1.0 | ∞ |
| 11 | RF ambient conditions-noise | B | 3.0 | R | $\sqrt{3}$ | 1 | 1 | 1.7 | 1.7 | ∞ |
| 12 | RF ambient conditions-reflection | B | 3.0 | R | $\sqrt{3}$ | 1 | 1 | 1.7 | 1.7 | ∞ |
| 13 | Probe positioned mech. restrictions | B | 0.71 | R | $\sqrt{3}$ | 1 | 1 | 0.4 | 0.4 | ∞ |
| 14 | Probe positioning with respect to phantom shell | B | 5.7 | R | $\sqrt{3}$ | 1 | 1 | 3.3 | 3.3 | ∞ |
| 15 | Post-processing | B | 4.0 | R | $\sqrt{3}$ | 1 | 1 | 2.3 | 2.3 | ∞ |
| Test sample related | | | | | | | | | | |
| 16 | Test sample positioning | A | 3.3 | N | 1 | 1 | 1 | 3.3 | 3.3 | 5 |
| 17 | Device holder uncertainty | A | 3.4 | N | 1 | 1 | 1 | 3.4 | 3.4 | 5 |
| 18 | Drift of output power | B | 5.0 | R | $\sqrt{3}$ | 1 | 1 | 2.9 | 2.9 | ∞ |
| Phantom and set-up | | | | | | | | | | |
| 19 | Phantom uncertainty | B | 1.0 | R | $\sqrt{3}$ | 1 | 1 | 0.6 | 0.6 | ∞ |
| 20 | Liquid conductivity (target) | B | 5.0 | R | $\sqrt{3}$ | 0.64 | 0.43 | 1.8 | 1.2 | ∞ |
| 21 | Liquid conductivity (meas.) | A | 1.3 | N | 1 | 0.64 | 0.43 | 0.83 | 0.56 | 9 |
| 22 | Liquid permittivity (target) | B | 5.0 | R | $\sqrt{3}$ | 0.6 | 0.49 | 1.7 | 1.4 | ∞ |
| 23 | Liquid permittivity (meas.) | A | 1.6 | N | 1 | 0.6 | 0.49 | 0.96 | 0.78 | 9 |
| Combined standard uncertainty | | $u_c = \sqrt{\sum_{i=1}^{23} c_i^2 u_i^2}$ | | | | | | 12.2 | 12.1 | 95.5 |
| Expanded uncertainty (Confidence interval of 95 %) | | $u_e = 2u_c$ | | | | | | 24.4 | 24.2 | |

16. Main Test Instruments

Table 16.1: List of Main Instruments

| No. | Name | Type | Serial Number | Calibration Date | Valid Period |
|-----|-----------------------|---------|---------------|------------------|--------------|
| 01 | Network analyzer | E5071C | MY46103759 | 2021-11-15 | One year |
| 02 | Dielectric probe | 85070E | MY44300317 | / | / |
| 03 | Power meter | E4418B | MY50000366 | 2021-12-13 | One year |
| 04 | Power sensor | E9304A | MY50000188 | | |
| 05 | Power meter | NRP | 101460 | 2021-01-15 | One year |
| 06 | Power sensor | NRP-Z91 | 100553 | | |
| 07 | Signal Generator | E8257D | MY47461211 | 2021-01-15 | One year |
| 08 | Amplifier | VTL5400 | 0404 | / | / |
| 09 | E-field Probe | ES3DV3 | 3151 | 2021-04-26 | One year |
| 10 | E-field Probe | EX3DV4 | 3753 | 2021-07-26 | One year |
| 11 | DAE | DAE4 | 786 | 2021-04-09 | One year |
| 12 | Dipole Validation Kit | D835V2 | 4d057 | 2021-10-18 | Three years |
| 13 | Dipole Validation Kit | D1750V2 | 1152 | 2019-08-30 | Three years |
| 14 | Dipole Validation Kit | D1900V2 | 5d088 | 2021-10-18 | Three years |
| 15 | Dipole Validation Kit | D2450V2 | 873 | 2021-10-21 | Three years |
| 16 | Dipole Validation Kit | D2550V2 | 1010 | 2021-05-21 | Three years |
| 17 | Dipole Validation Kit | D5GHzV2 | 1238 | 2019-08-29 | Three years |
| 18 | BTS | MT8820C | 6201341853 | 2021-01-15 | One year |
| 19 | BTS | E5515C | GB46110722 | 2021-01-15 | One year |
| 20 | BTS | CMW500 | 152499 | 2021-07-16 | One year |
| 21 | Software | DASY5 | / | / | / |

ANNEX A: Graph Results

GSM850 Body

Date: 2021-11-15

Electronics: DAE4 Sn786

Medium: Head 835MHz

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.925$ S/m; $\epsilon_r = 40.887$; $\rho = 1000$ kg/m³

Communication System: UID 0, GPRS 2Txslot (0) Frequency: 824.2 MHz Duty Cycle: 1:4

Probe: ES3DV3 – SN3151 ConvF (6.40, 6.40, 6.40);

Rear Side Low/Area Scan (61x61x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.879 W/kg

Rear Side Low -13mm/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

reference Value = 7.847 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.20 W/kg

SAR(1 g) = 0.646 W/kg; SAR(10 g) = 0.360 W/kg

Maximum value of SAR (measured) = 0.946 W/kg

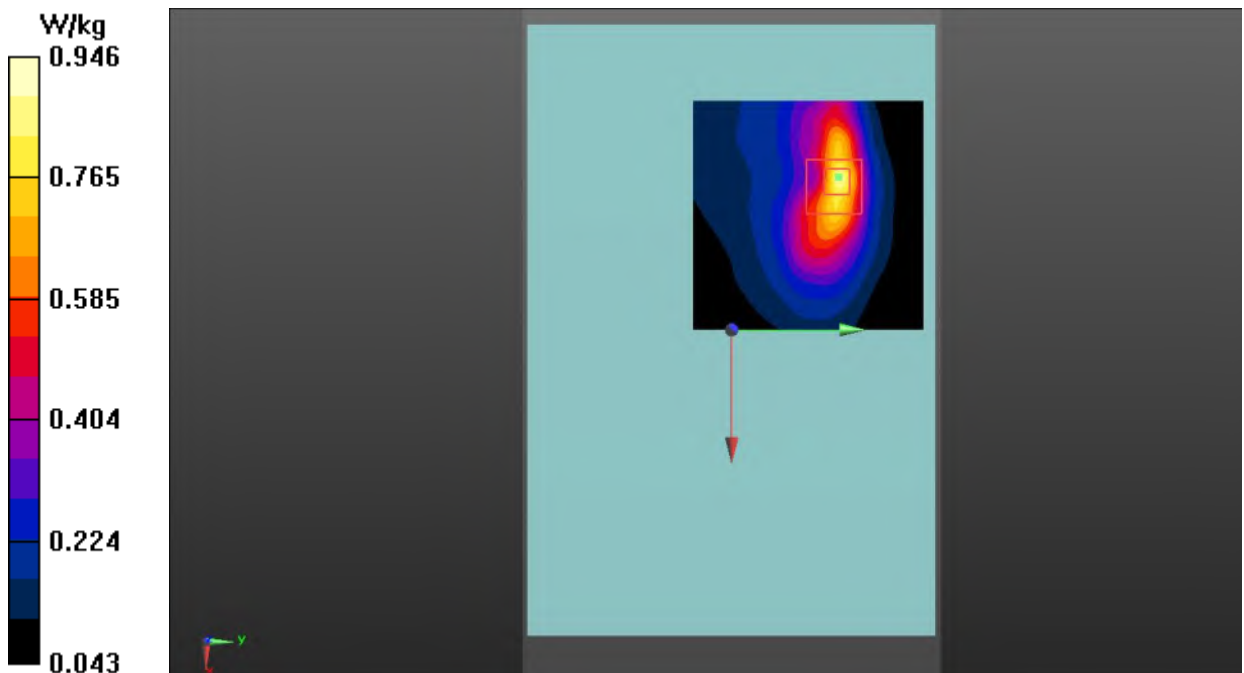


Fig.1 GSM 850 Body

GSM1900 Body

Date: 2021-11-21

Electronics: DAE4 Sn786

Medium: Head 1900MHz

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.371$ S/m; $\epsilon_r = 39.723$; $\rho = 1000$ kg/m³

Communication System: UID 0, GPRS 2Txslot (0) Frequency: 1850.2 MHz Duty Cycle: 1:4

Probe: ES3DV3 – SN3151 ConvF (5.09, 5.09, 5.09);

Rear Side Low/Area Scan (71x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.973 W/kg

Rear Side Low/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.711 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.00 W/kg

SAR(1 g) = 0.679 W/kg; SAR(10 g) = 0.374 W/kg

Maximum value of SAR (measured) = 0.772 W/kg

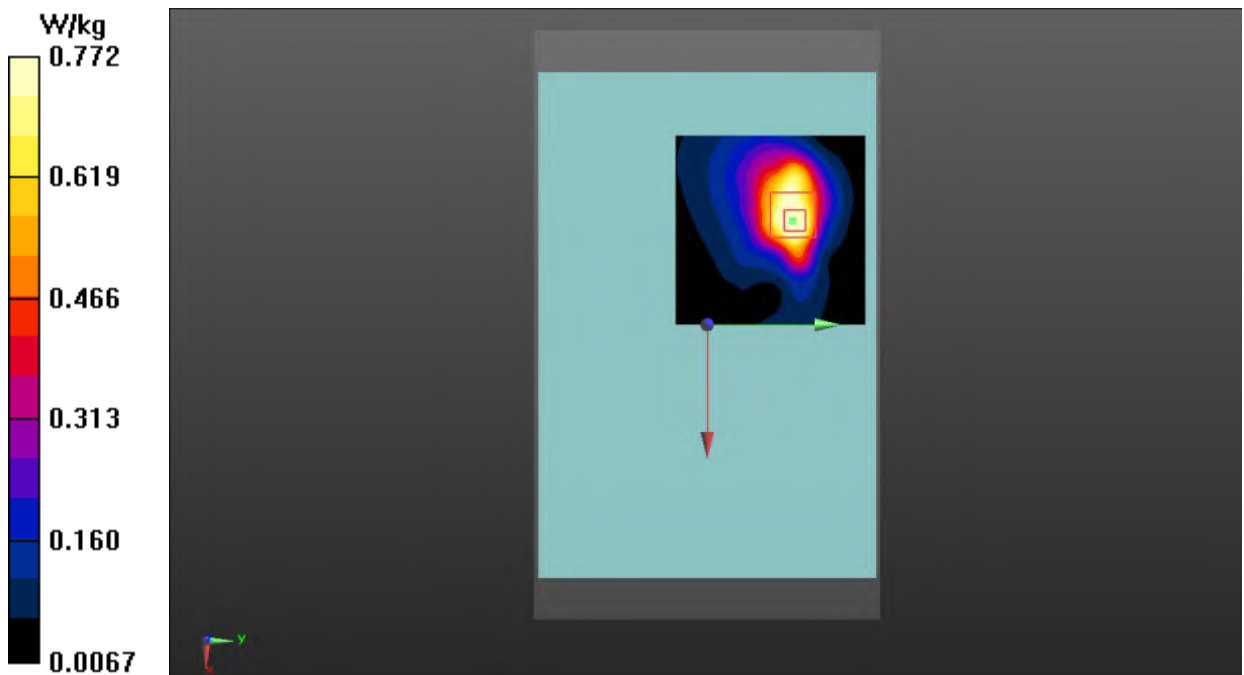


Fig.2 GSM 1900 Body

WCDMA Band 2 Body

Date: 2021-11-21

Electronics: DAE4 Sn786

Medium: Head 1900MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.385$ S/m; $\epsilon_r = 39.589$; $\rho = 1000$ kg/m³

Communication System: UID 0, WCDMA (0) Frequency: 1880 MHz Duty Cycle: 1:1

Probe: ES3DV3 – SN3151 ConvF (5.09, 5.09, 5.09);

Rear Side Middle/Area Scan (71x41x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.779 W/kg

Rear Side Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 2.411 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.935 W/kg

SAR(1 g) = 0.567 W/kg; SAR(10 g) = 0.330 W/kg

Maximum value of SAR (measured) = 0.762 W/kg

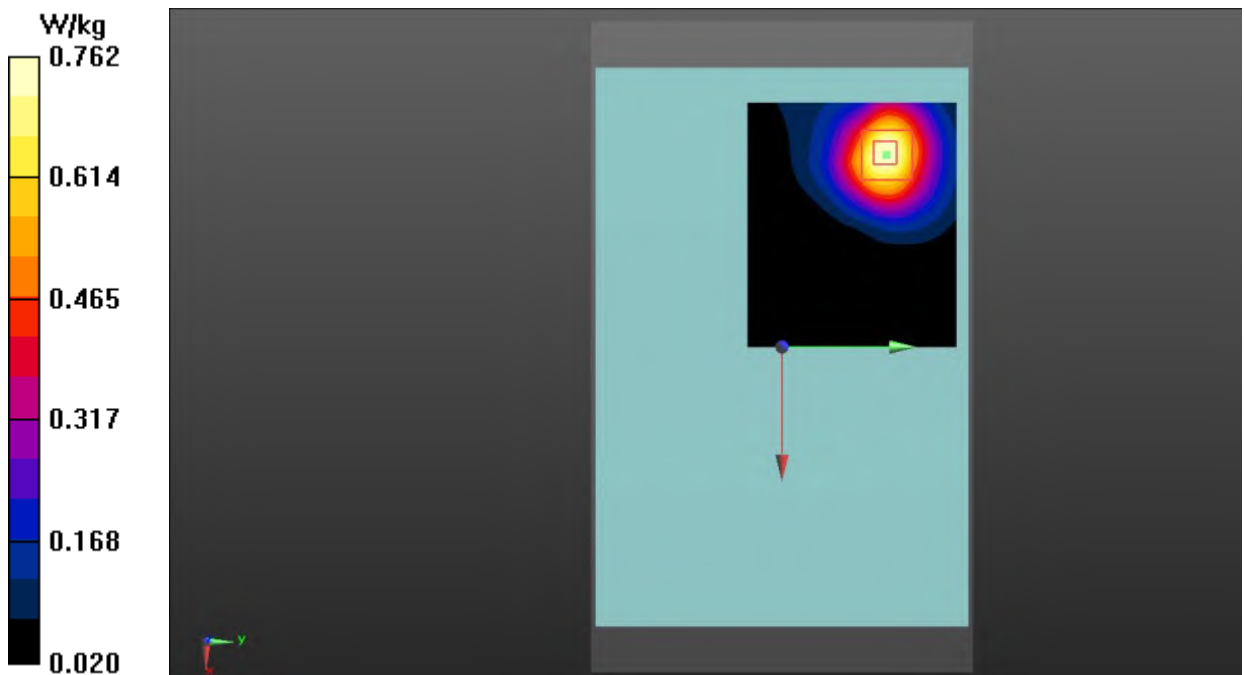


Fig.3 WCDMA Band 2 Body

WCDMA Band 5 Body

Date: 2021-11-15

Electronics: DAE4 Sn786

Medium: Head 835MHz

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.933$ S/m; $\epsilon_r = 40.68$; $\rho = 1000$ kg/m³

Communication System: UID 0, WCDMA (0) Frequency: 836.6 MHz Duty Cycle: 1:1

Probe: ES3DV3 – SN3151 ConvF (6.40, 6.40, 6.40);

Rear Side Middle/Area Scan (71x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.519 W/kg

Rear Side Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.856 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.830 W/kg

SAR(1 g) = 0.422 W/kg; SAR(10 g) = 0.228 W/kg

Maximum value of SAR (measured) = 0.580 W/kg

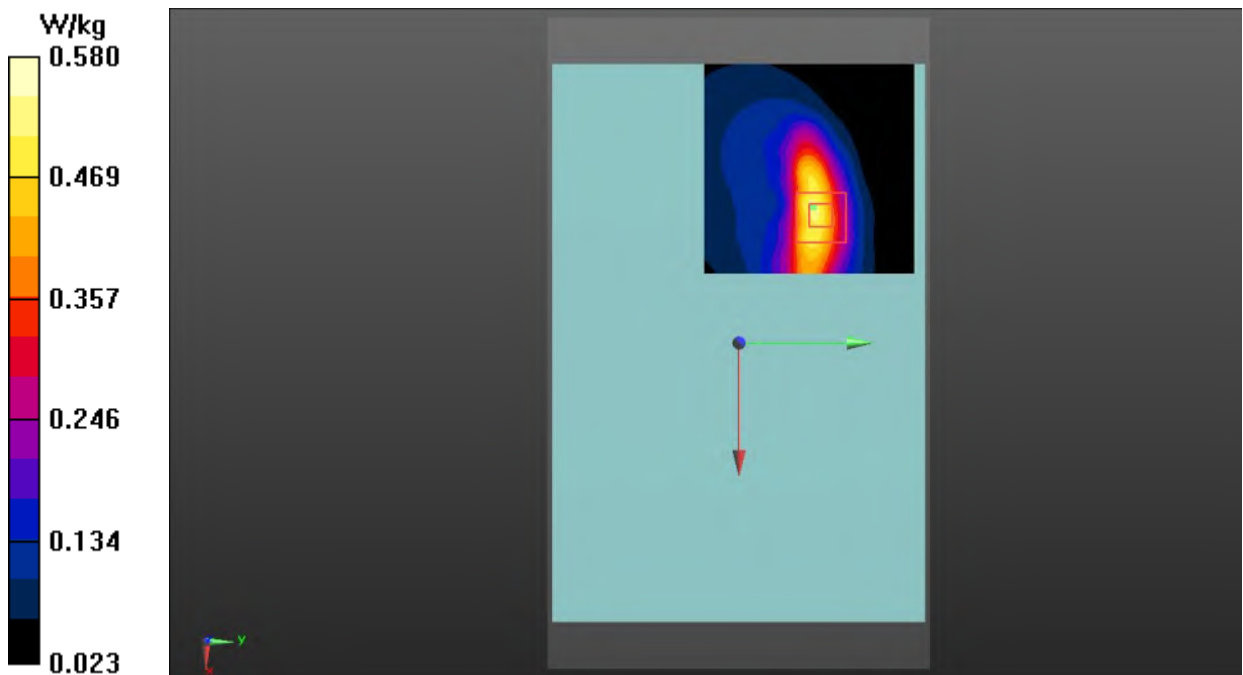


Fig.4 WCDMA Band 5 Body

LTE Band 2 Body

Date: 2021-11-21

Electronics: DAE4 Sn786

Medium: Head 1900MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.393$ S/m; $\epsilon_r = 39.47$; $\rho = 1000$ kg/m³

Communication System: UID 0, LTE_FDD (0) Frequency: 1900 MHz Duty Cycle: 1:1

Probe: ES3DV3 – SN3151 ConvF (5.09, 5.09, 5.09);


Rear Side High 50RB25/Area Scan (71x41x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.924 W/kg**Rear Side High 50RB25/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 4.556 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.01 W/kg

SAR(1 g) = 0.568 W/kg; SAR(10 g) = 0.318 W/kg

Maximum value of SAR (measured) = 0.776 W/kg

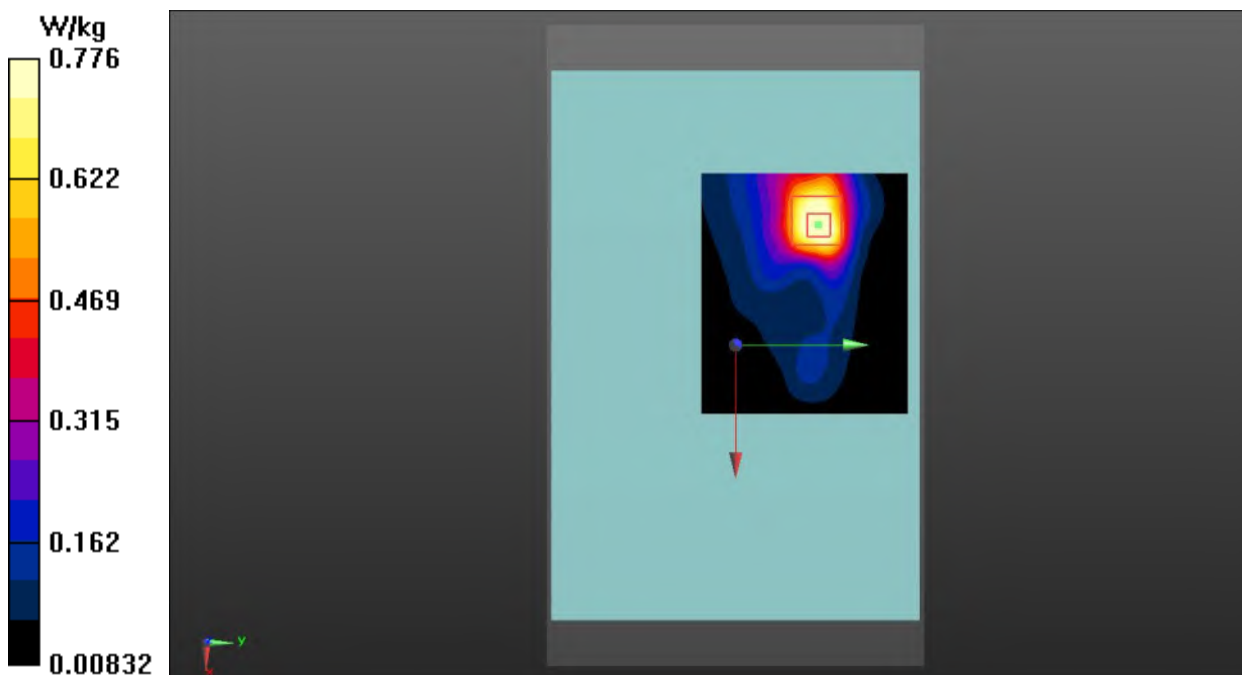**Fig.5 LTE Band 2 Body**

LTE Band 4 Body

Date: 2021-11-20

Electronics: DAE4 Sn786

Medium: Head 1750MHz

Medium parameters used: $f = 1720$ MHz; $\sigma = 1.351$ S/m; $\epsilon_r = 40.33$; $\rho = 1000$ kg/m³

Communication System: UID 0, LTE_FDD (0) Frequency: 1720 MHz Duty Cycle: 1:1

Probe: ES3DV3 – SN3151 ConvF (5.25, 5.25, 5.25);

Rear Side Low 50RB25/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.813 W/kg


Rear Side Low 50RB25/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.161 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.44 W/kg

SAR(1 g) = 0.675 W/kg; SAR(10 g) = 0.318 W/kg

Maximum value of SAR (measured) = 0.902 W/kg

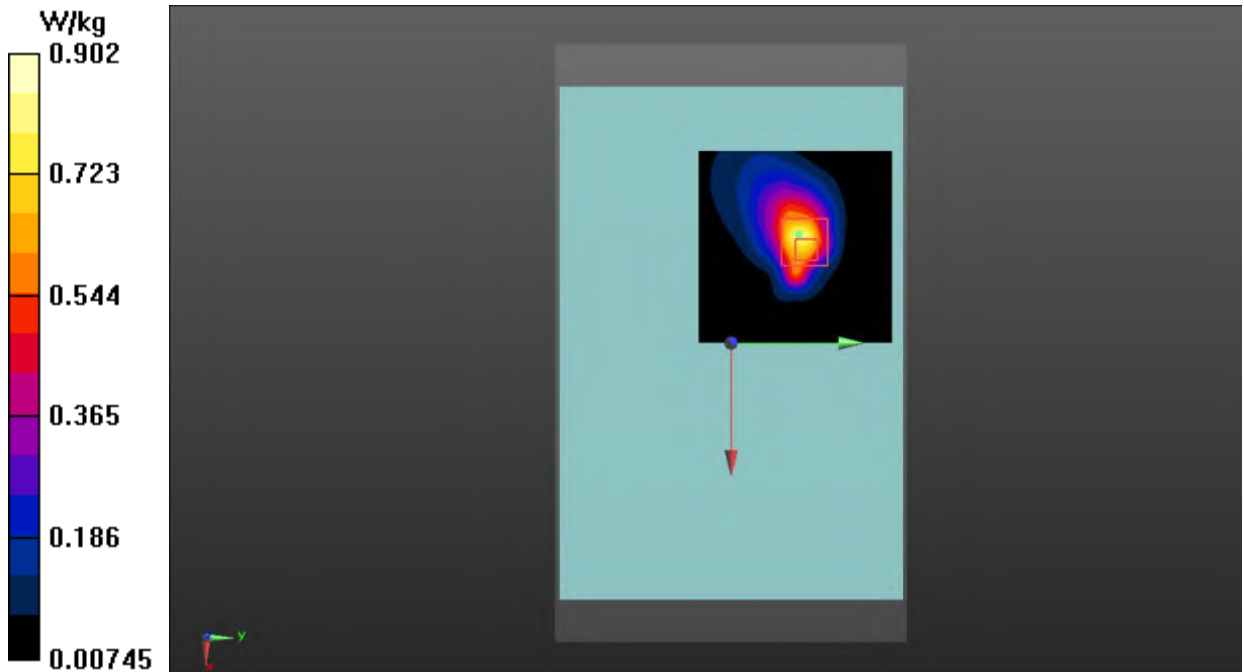**Fig.6 LTE Band 4 Body**

LTE Band 5 Body

Date: 2021-11-15

Electronics: DAE4 Sn786

Medium: Head 835MHz

Medium parameters used (interpolated): $f = 829$ MHz; $\sigma = 0.928$ S/m; $\epsilon_r = 40.78$; $\rho = 1000$ kg/m³

Communication System: UID 0, LTE_FDD (0) Frequency: 829 MHz Duty Cycle: 1:1

Probe: ES3DV3 – SN3151 ConvF (6.40, 6.40, 6.40);

Rear Side Low 1RB24/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.09 W/kg


Rear Side Low 1RB24/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.836 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.05 W/kg

SAR(1 g) = 0.528 W/kg; SAR(10 g) = 0.280 W/kg

Maximum value of SAR (measured) = 0.846 W/kg

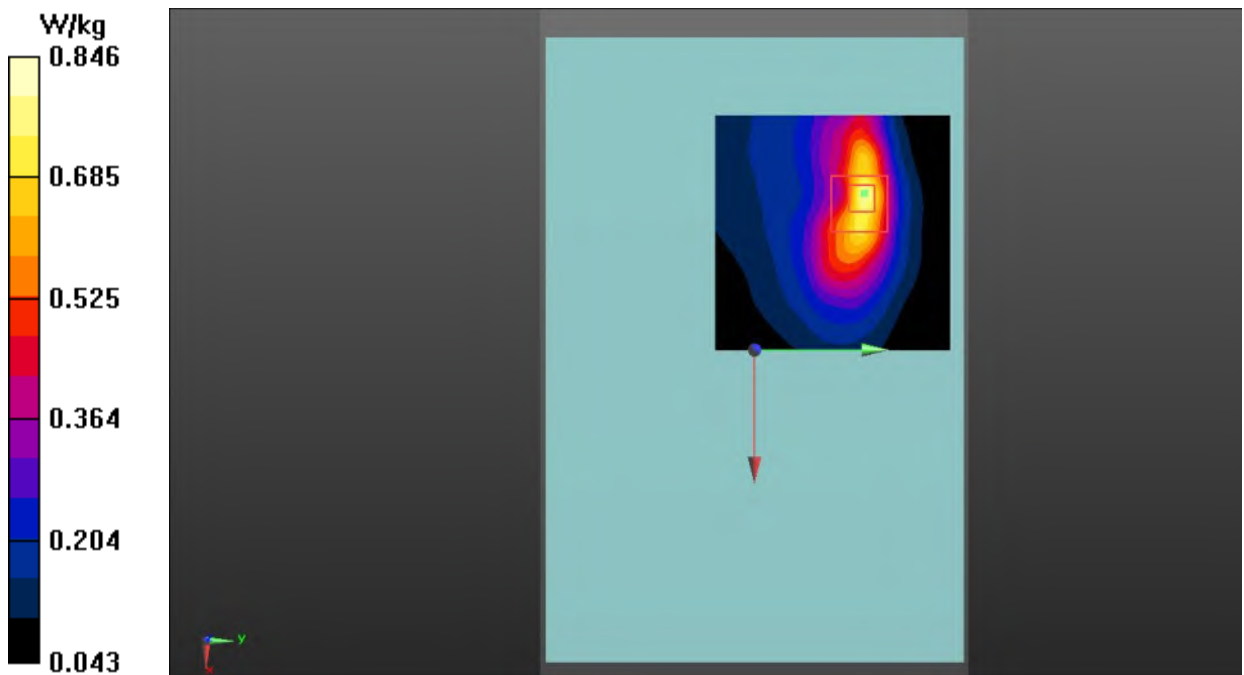**Fig.7 LTE Band 5 Body**

LTE Band 7 Body

Date: 2021-12-20

Electronics: DAE4 Sn786

Medium: Head 2550MHz

Medium parameters used (interpolated): $f = 2560$ MHz; $\sigma = 1.964$ S/m; $\epsilon_r = 38.028$; $\rho = 1000$ kg/m³

Communication System: UID 0, LTE_FDD (0) Frequency: 2560 MHz Duty Cycle: 1:1

Probe: ES3DV3 – SN3151 ConvF (4.39, 4.39, 4.39);

Rear Side High 1RB50/Area Scan (71x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.540 W/kg


Rear Side High 1RB50/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.800 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.814 W/kg

SAR(1 g) = 0.355 W/kg; SAR(10 g) = 0.162 W/kg

Maximum value of SAR (measured) = 0.551 W/kg

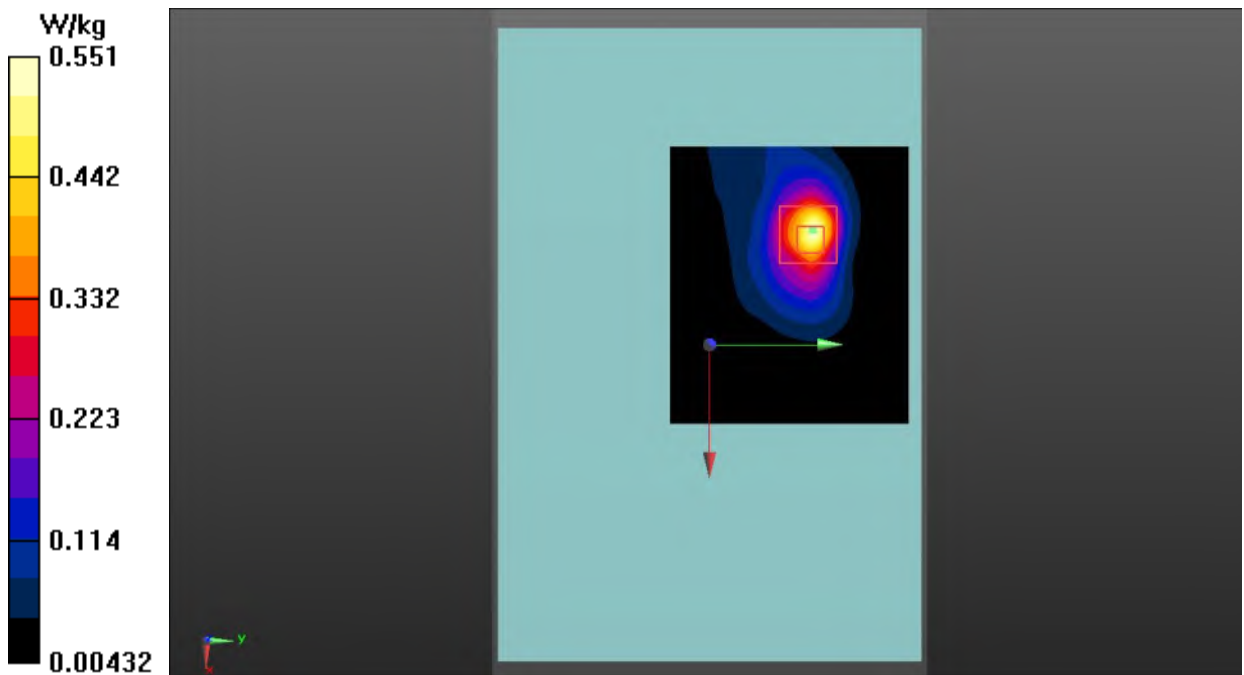**Fig.8 LTE Band 7 Body**

LTE Band 38 Body

Date: 2021-12-20

Electronics: DAE4 Sn786

Medium: Head 2550MHz

Medium parameters used (interpolated): $f = 2595$ MHz; $\sigma = 1.976$ S/m; $\epsilon_r = 37.954$; $\rho = 1000$ kg/m³

Communication System: UID 0, LTE_FDD (0) Frequency: 2595 MHz Duty Cycle: 1:1

Probe: ES3DV3 – SN3151 ConvF (4.39, 4.39, 4.39);


Rear Side Middle 50RB50/Area Scan (61x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 1.15 W/kg**Rear Side Middle 50RB50/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.298 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.60 W/kg

SAR(1 g) = 0.883 W/kg; SAR(10 g) = 0.393 W/kg

Maximum value of SAR (measured) = 1.11 W/kg

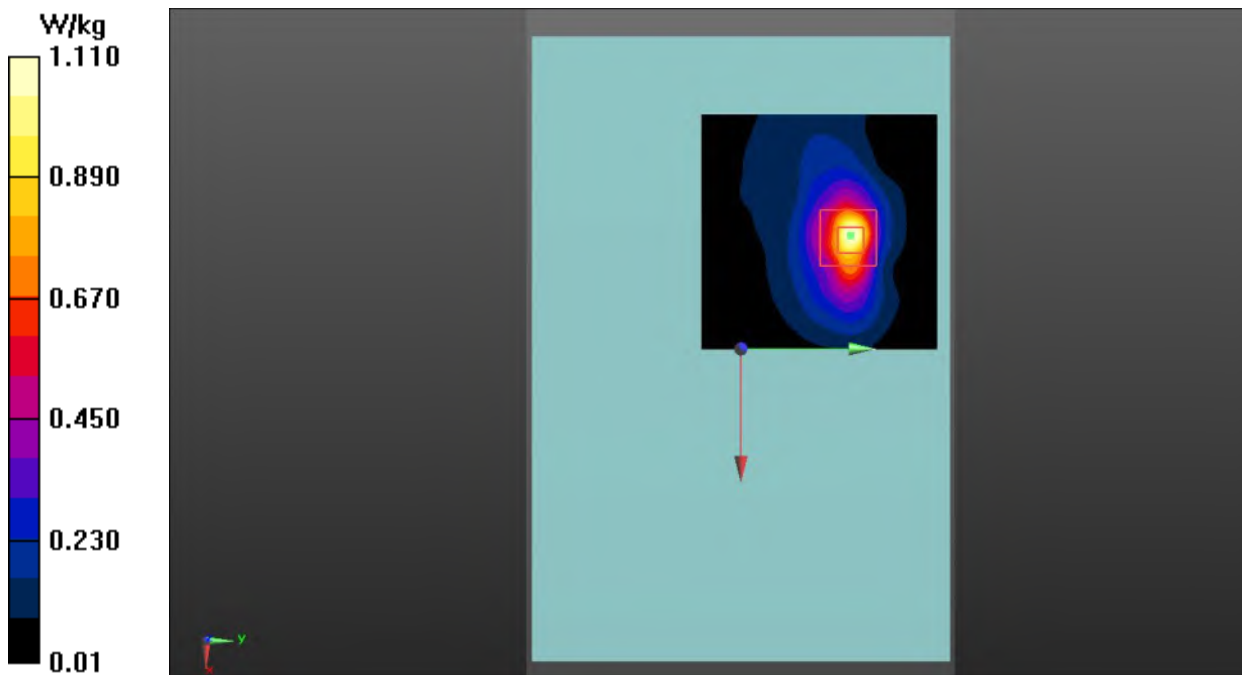**Fig.9 LTE Band 38 Body**

LTE Band 41 Body

Date: 2021-12-20

Electronics: DAE4 Sn786

Medium: Head 2550MHz

Medium parameters used (interpolated): $f = 2680$ MHz; $\sigma = 2.105$ S/m; $\epsilon_r = 37.212$; $\rho = 1000$ kg/m³

Communication System: UID 0, LTE_FDD (0) Frequency: 2680 MHz Duty Cycle: 1:1

Probe: ES3DV3 – SN3151 ConvF (4.39, 4.39, 4.39);

Rear Side High 1RB50/Area Scan (71x41x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.858 W/kg


Rear Side High 1RB50/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.038 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 1.47 W/kg

SAR(1 g) = 0.639 W/kg; SAR(10 g) = 0.291 W/kg

Maximum value of SAR (measured) = 0.957 W/kg

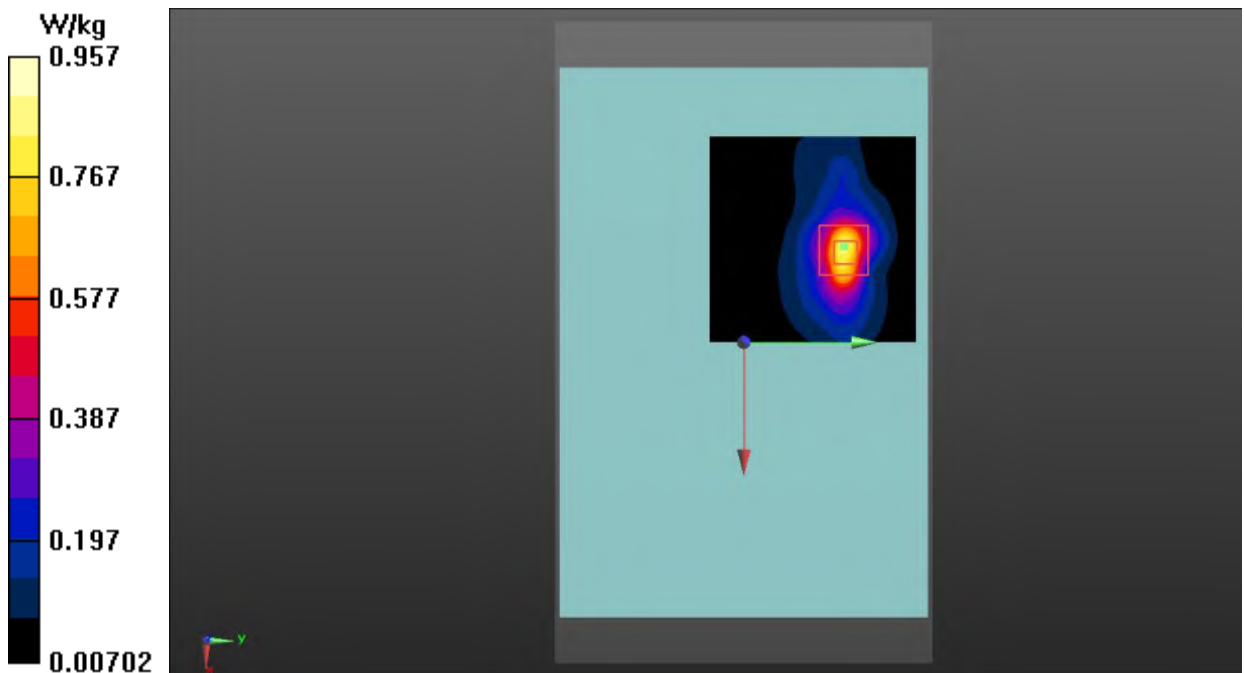**Fig.10 LTE Band 41 Body**

WLAN 2.4G Body

Date: 2021-12-06

Electronics: DAE4 Sn786

Medium: Head 2450MHz

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.813$ S/m; $\epsilon_r = 38.901$; $\rho = 1000$ kg/m³

Communication System: UID 0, WiFi (0) Frequency: 2412 MHz Duty Cycle: 1:1

Probe: ES3DV3 – SN3151 ConvF (4.58, 4.58, 4.58);

Right Side Ch.1/Area Scan (71x41x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.427 W/kg

Right Side Ch.1/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 9.119 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.598 W/kg

SAR(1 g) = 0.296 W/kg; SAR(10 g) = 0.145 W/kg

Maximum value of SAR (measured) = 0.441 W/kg

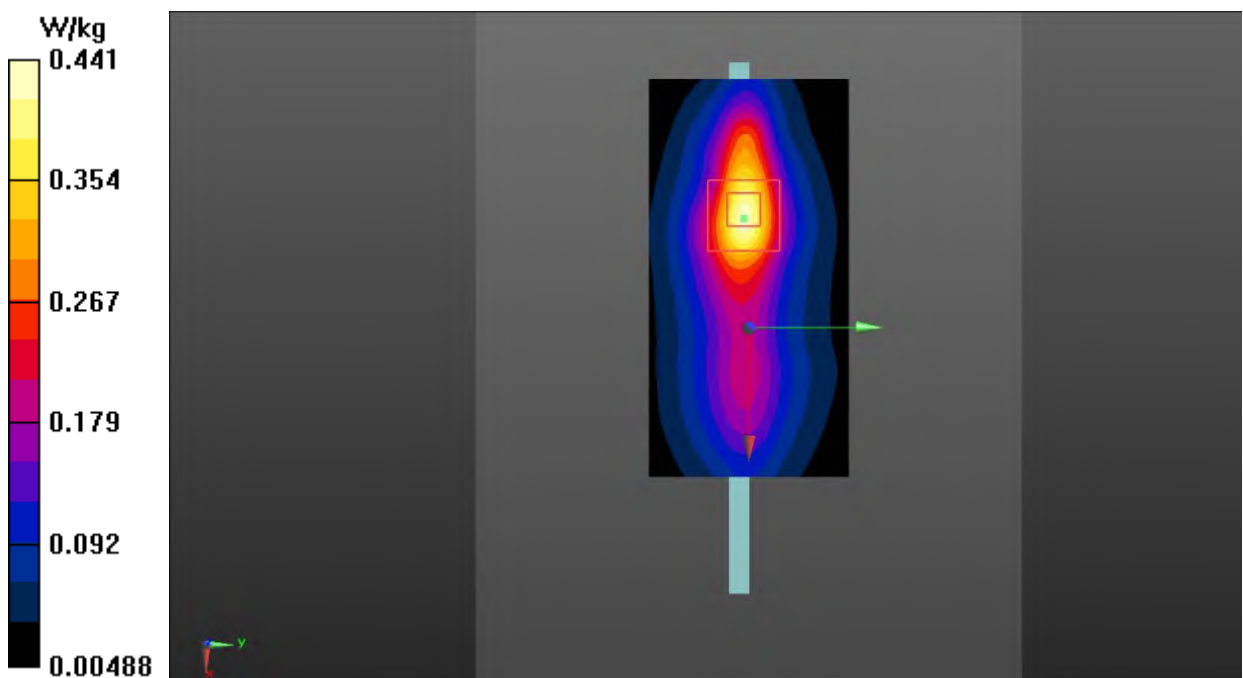


Fig.11 WLAN 2.4G Body

WLAN 5G Body

Date: 2021-12-07

Electronics: DAE4 Sn786

Medium: Head 5250MHz

Medium parameters used: $f = 5260$ MHz; $\sigma = 4.701$ S/m; $\epsilon_r = 36.747$; $\rho = 1000$ kg/m³

Communication System: UID 0, WIFI 5G (0) Frequency: 5260 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN3753 ConvF (4.56, 4.56, 4.56);

Rear Side Ch.52/Area Scan (71x71x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.780 W/kg

Rear Side Ch.52/Zoom Scan (8x8x21)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 0.9400 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 1.53 W/kg

SAR(1 g) = 0.440 W/kg; SAR(10 g) = 0.165 W/kg

Maximum value of SAR (measured) = 0.800 W/kg

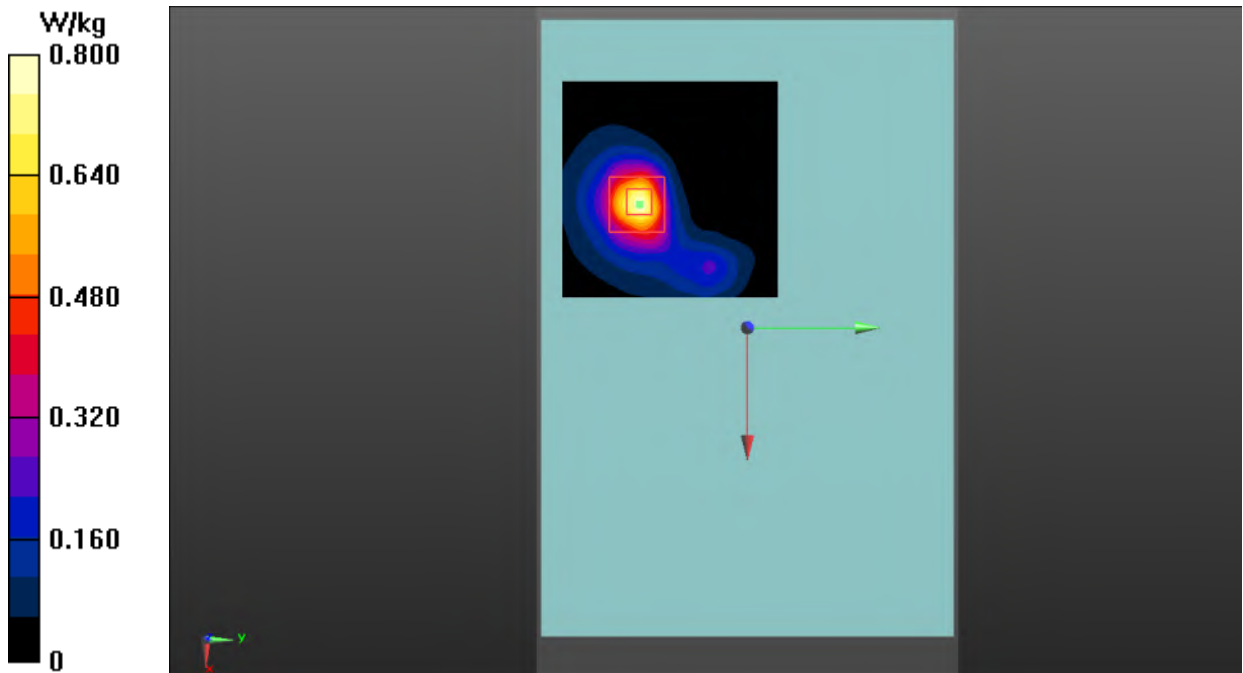


Fig.12 WLAN 5G Body

ANNEX B: System Verification Results

835MHz

Date: 2021-11-15

Electronics: DAE4 Sn786

Medium: Head 835MHz

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.931 \text{ S/m}$; $\epsilon_r = 40.701$; $\rho = 1000 \text{ kg/m}^3$

Communication System: CW Frequency: 835 MHz Duty Cycle: 1:1

Probe: ES3DV3 – SN3151 ConvF (6.40, 6.40, 6.40);

System Validation /Area Scan (81x151x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Reference Value = 64.842 V/m; Power Drift = 0.04 dB

SAR(1 g) = 2.46 W/kg; SAR(10 g) = 1.58 W/kg

Maximum value of SAR (interpolated) = 3.35 W/kg


System Validation /Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 64.842 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 3.69 W/kg

SAR(1 g) = 2.46 W/kg; SAR(10 g) = 1.59 W/kg

Maximum value of SAR (measured) = 3.39 W/kg

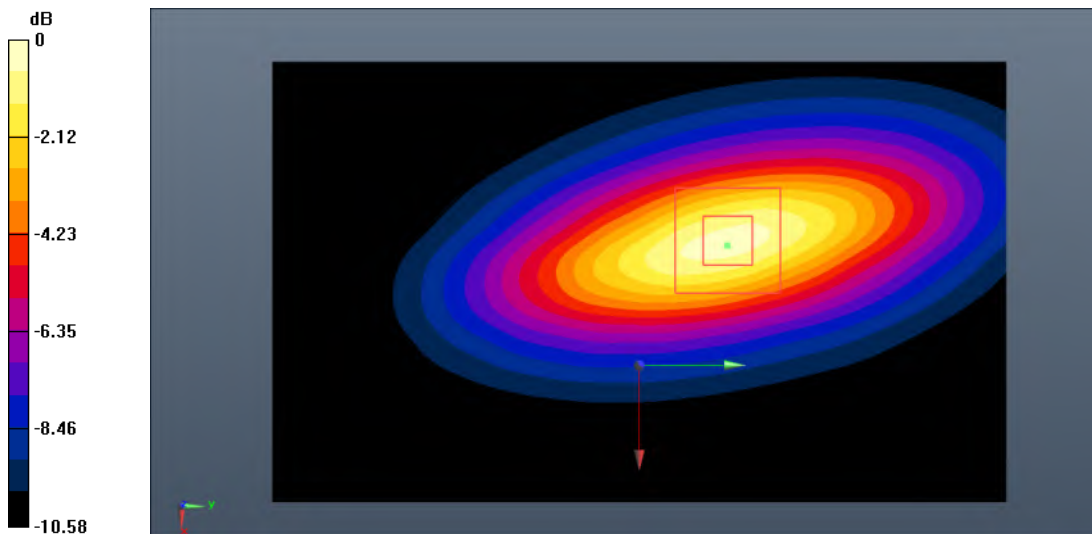

0 dB = 3.39 W/kg = 5.30 dB W/kg

Fig.B.1. Validation 835MHz 250mW

1750MHz

Date: 2021-11-20

Electronics: DAE4 Sn786

Medium: Head 1750MHz

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.372$ S/m; $\epsilon_r = 39.981$; $\rho = 1000$ kg/m³

Communication System: CW_TMC Frequency: 1750 MHz Duty Cycle: 1:1

Probe: ES3DV3 – SN3151 ConvF (5.25, 5.25, 5.25);

System Validation /Area Scan (81x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Reference Value = 78.146 V/m; Power Drift = -0.08 dB

SAR(1 g) = 9.11 W/kg; SAR(10 g) = 4.85 W/kg

Maximum value of SAR (interpolated) = 11.0 W/kg


System Validation /Zoom Scan (7x7x7)/Cube0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 78.146 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 20.3 W/kg

SAR(1 g) = 8.90 W/kg; SAR(10 g) = 4.77 W/kg

Maximum value of SAR (measured) = 10.7 W/kg

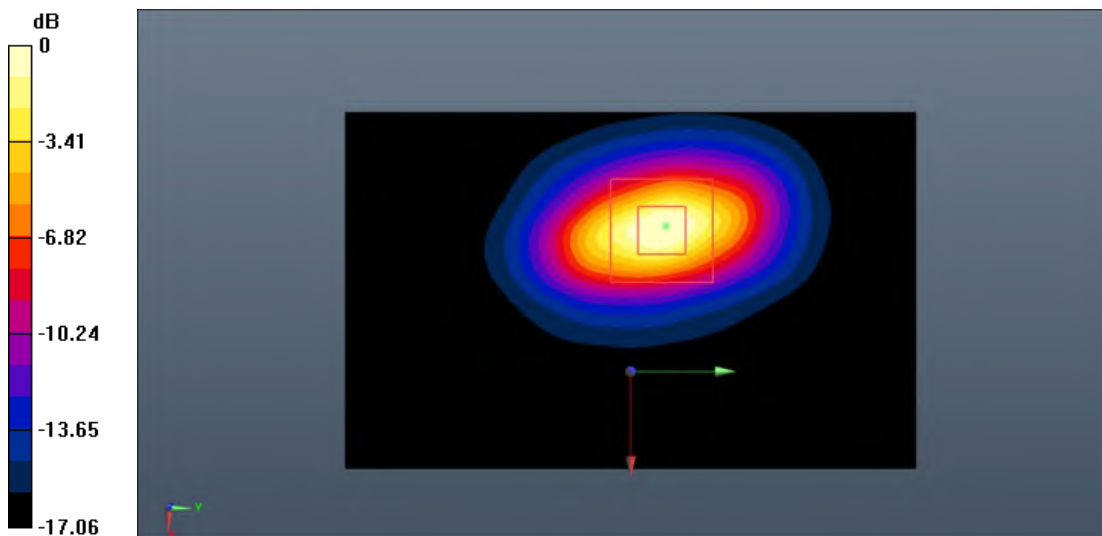

0 dB = 10.7 W/kg = 10.29 dB W/kg

Fig.B.2. Validation 1750MHz 250mW

1900MHz

Date: 2021-11-21

Electronics: DAE4 Sn786

Medium: Head 1900MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.393$ S/m; $\epsilon_r = 39.47$; $\rho = 1000$ kg/m³

Communication System: CW_TMC Frequency: 1900 MHz Duty Cycle: 1:1

Probe: ES3DV3 – SN3151 ConvF (5.09, 5.09, 5.09);

System Validation /Area Scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Reference Value = 81.042 V/m; Power Drift = -0.05 dB

SAR(1 g) = 10.0 W/kg; SAR(10 g) = 5.22 W/kg

Maximum value of SAR (interpolated) = 12.1 W/kg


System Validation /Zoom Scan (7x7x7)/Cube0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 81.042 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 24.2 W/kg

SAR(1 g) = 9.81 W/kg; SAR(10 g) = 5.14 W/kg

Maximum value of SAR (measured) = 11.9 W/kg

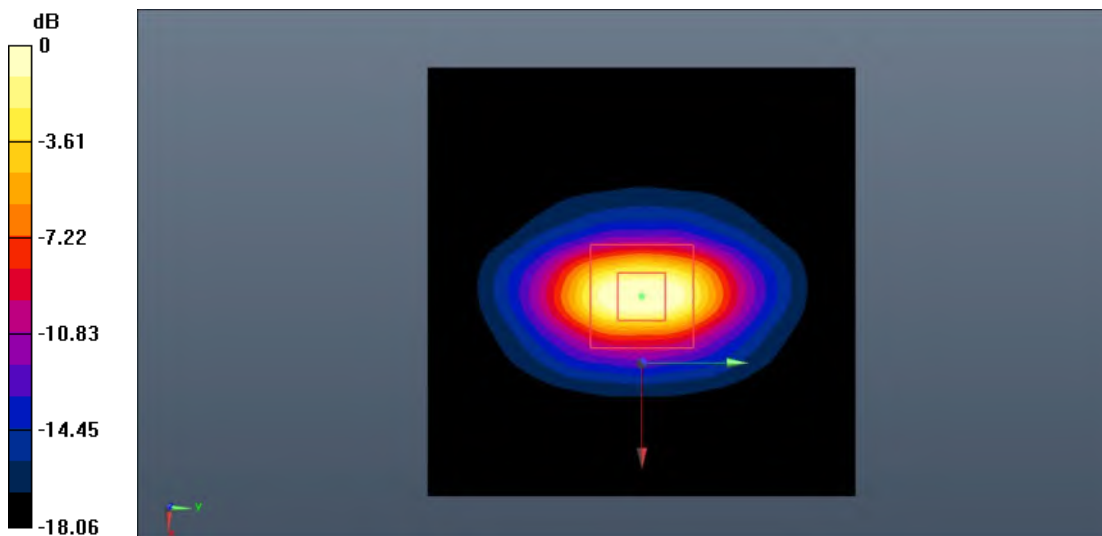

0 dB = 11.9 W/kg = 10.76 dB W/kg

Fig.B.3. Validation 1900MHz 250mW

2450MHz

Date: 2021-12-06

Electronics: DAE4 Sn786

Medium: Head 2450MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.860$ S/m; $\epsilon_r = 38.671$; $\rho = 1000$ kg/m³

Communication System: CW_TMC Frequency: 2450 MHz Duty Cycle: 1:1

Probe: ES3DV3 – SN3151 ConvF (4.58, 4.58, 4.58);

System Validation /Area Scan (81x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Reference Value = 92.014 V/m; Power Drift = 0.01 dB

SAR(1 g) = 13.3 W/kg; SAR(10 g) = 6.07 W/kg

Maximum value of SAR (interpolated) = 15.3 W/kg


System Validation /Zoom Scan (7x7x7)/Cube0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 92.014 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 34.6 W/kg

SAR(1 g) = 13.5 W/kg; SAR(10 g) = 6.18 W/kg

Maximum value of SAR (measured) = 15.5 W/kg

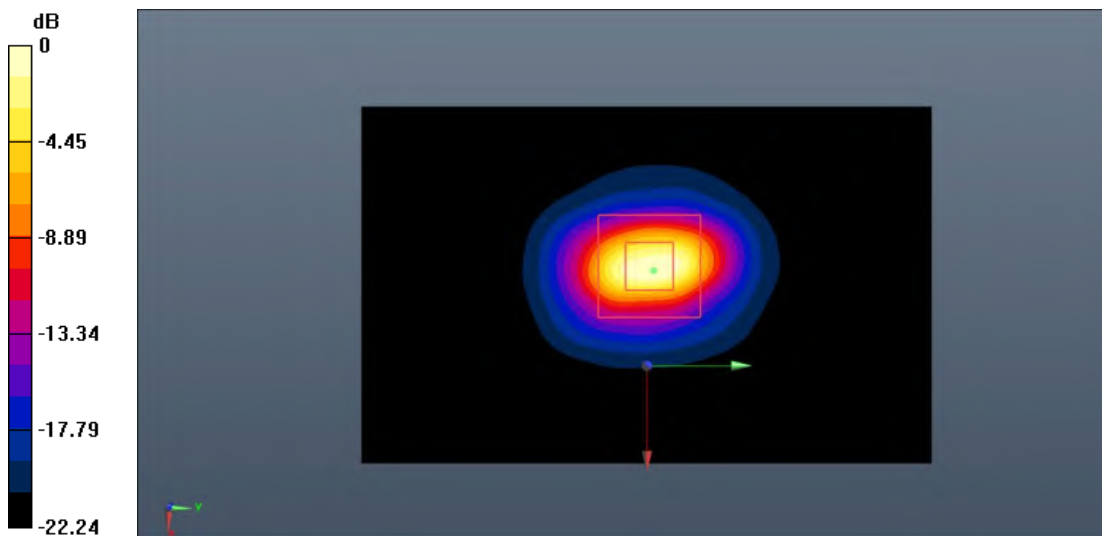

0 dB = 15.5 W/kg = 11.90 dB W/kg

Fig.B.4. Validation 2450MHz 250mW

2550MHz

Date: 2021-12-20

Electronics: DAE4 Sn786

Medium: Head 2550MHz

Medium parameters used: $f = 2550 \text{ MHz}$; $\sigma = 1.958 \text{ S/m}$; $\epsilon_r = 38.211$; $\rho = 1000 \text{ kg/m}^3$

Communication System: CW_TMC Frequency: 2550 MHz Duty Cycle: 1:1

Probe: ES3DV3 – SN3151 ConvF (4.58, 4.58, 4.58);

System Validation /Area Scan (91x91x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Reference Value = 93.815 V/m; Power Drift = 0.10 dB

SAR(1 g) = 14.1 W/kg; SAR(10 g) = 6.31 W/kg

Maximum value of SAR (interpolated) = 16.0 W/kg


System Validation /Zoom Scan (7x7x7)/Cube0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 93.815 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 37.1 W/kg

SAR(1 g) = 14.3 W/kg; SAR(10 g) = 6.41 W/kg

Maximum value of SAR (measured) = 16.3 W/kg

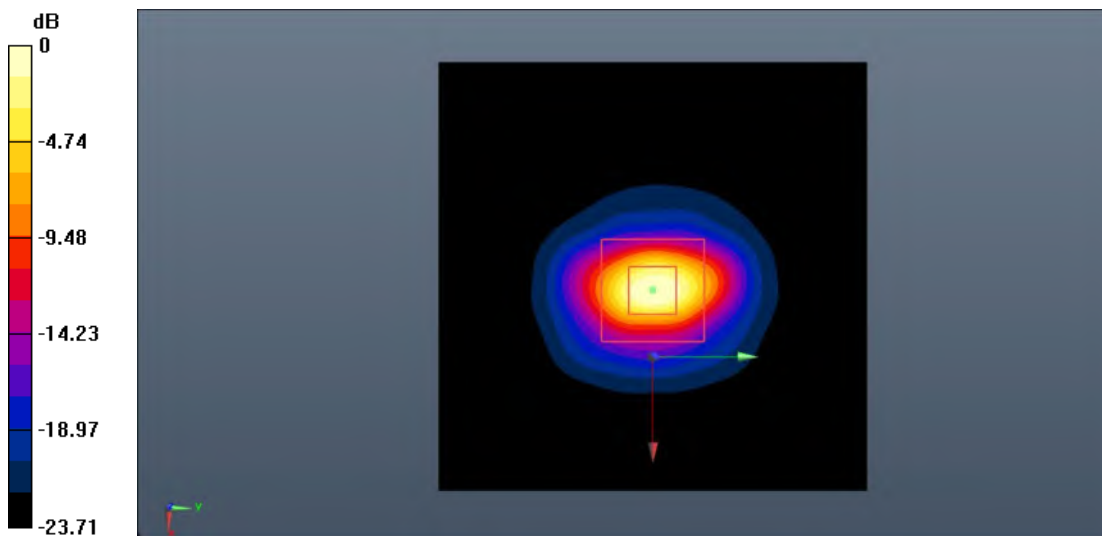

0 dB = 16.3 W/kg = 12.12 dB W/kg

Fig.B.5. Validation 2550MHz 250mW

5250MHz

Date: 2021-12-07

Electronics: DAE4 Sn786

Medium: Head 5250MHz

Medium parameters used: $f = 5250$ MHz; $\sigma = 4.680$ S/m; $\epsilon_r = 36.761$; $\rho = 1000$ kg/m³

Communication System: CW Frequency: 5250 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN3753 ConvF (4.56, 4.56, 4.56);

System Validation /Area Scan (61x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Reference Value = 63.715 V/m; Power Drift = -0.09 dB

SAR(1 g) = 7.73 W/kg; SAR(10 g) = 2.21 W/kg

Maximum value of SAR (interpolated) = 9.89 W/kg


System Validation /Zoom Scan (8x8x21)/Cube0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 63.715 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 22.6 W/kg

SAR(1 g) = 7.50 W/kg; SAR(10 g) = 2.17 W/kg

Maximum value of SAR (measured) = 9.81 W/kg

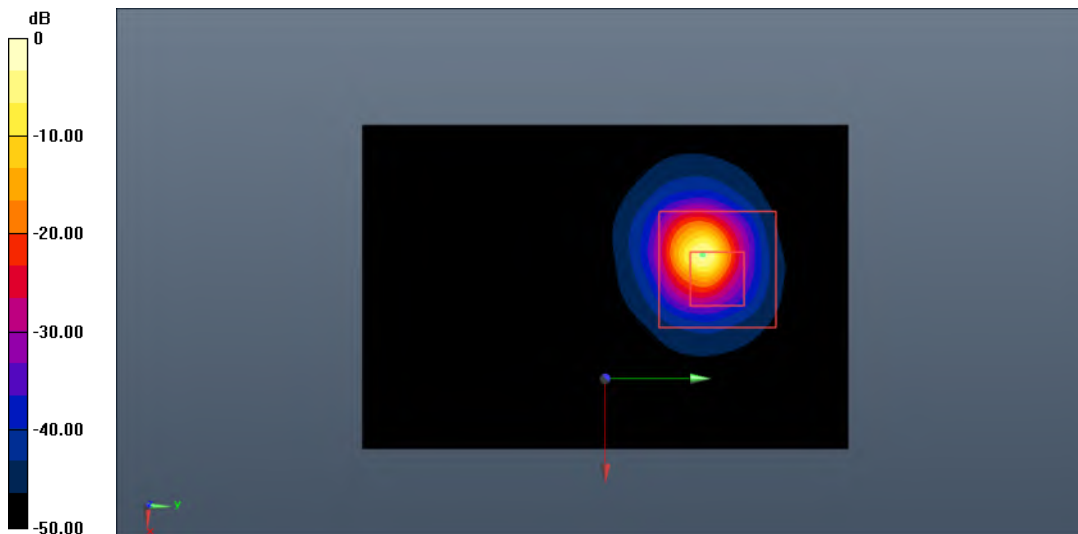

0 dB = 9.81 W/kg = 9.92 dB W/kg

Fig.B.6. Validation 5250MHz 100mW

5600MHz

Date: 2021-12-07

Electronics: DAE4 Sn786

Medium: Head 5600MHz

Medium parameters used: $f = 5600$ MHz; $\sigma = 5.174$ S/m; $\epsilon_r = 35.36$; $\rho = 1000$ kg/m³

Communication System: CW Frequency: 5600 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN3753 ConvF (4.42, 4.42, 4.42);

System Validation /Area Scan (61x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Reference Value = 66.513 V/m; Power Drift = 0.02 dB

SAR(1 g) = 8.04 W/kg; SAR(10 g) = 2.26 W/kg

Maximum value of SAR (interpolated) = 10.0 W/kg


System Validation /Zoom Scan (8x8x21)/Cube0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 66.513 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 25.9 W/kg

SAR(1 g) = 8.23 W/kg; SAR(10 g) = 2.32 W/kg

Maximum value of SAR (measured) = 10.2 W/kg

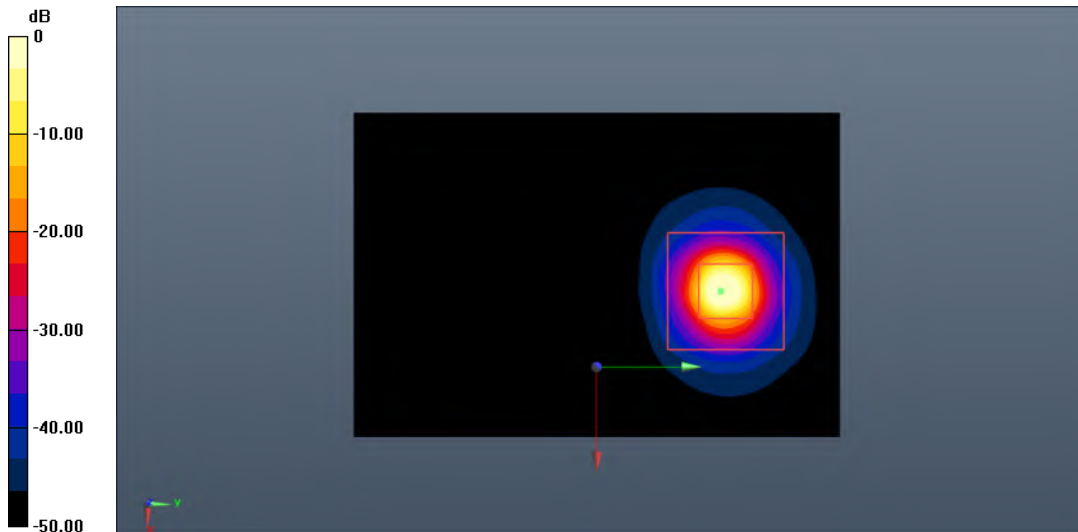

0 dB = 10.2 W/kg = 10.09 dB W/kg

Fig.B.7. Validation 5600MHz 100mW

5750MHz

Date: 2021-12-07

Electronics: DAE4 Sn786

Medium: Head 5750 MHz

Medium parameters used: $f = 5750$ MHz; $\sigma = 5.341$ S/m; $\epsilon_r = 35.03$; $\rho = 1000$ kg/m³

Communication System: CW Frequency: 5750 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN3753 ConvF (4.65, 4.65, 4.65);

System Validation /Area Scan (61x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Reference Value = 65.654 V/m; Power Drift = 0.08 dB

SAR(1 g) = 7.97 W/kg; SAR(10 g) = 2.23 W/kg

Maximum value of SAR (interpolated) = 10.1 W/kg


System Validation /Zoom Scan (8x8x21)/Cube0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 65.654 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 25.3 W/kg

SAR(1 g) = 8.12 W/kg; SAR(10 g) = 2.25 W/kg

Maximum value of SAR (measured) = 10.2 W/kg

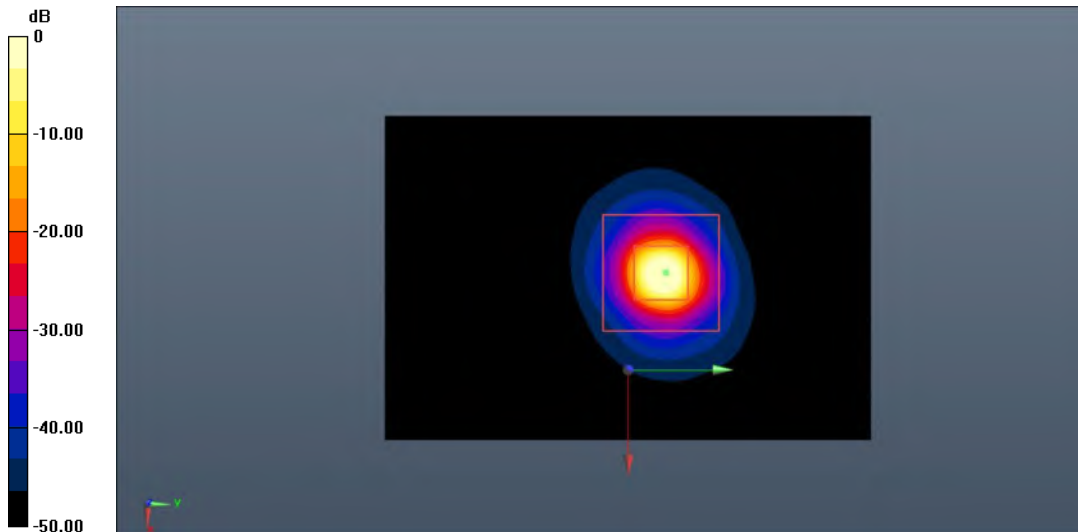


0 dB = 10.2 W/kg = 10.09 dB W/kg

Fig.B.8. Validation 5750MHz 100mW

ANNEX C: SAR Measurement Setup

C.1. Measurement Set-up

DASY5 system for performing compliance tests is illustrated above graphically. This system consists of the following items:

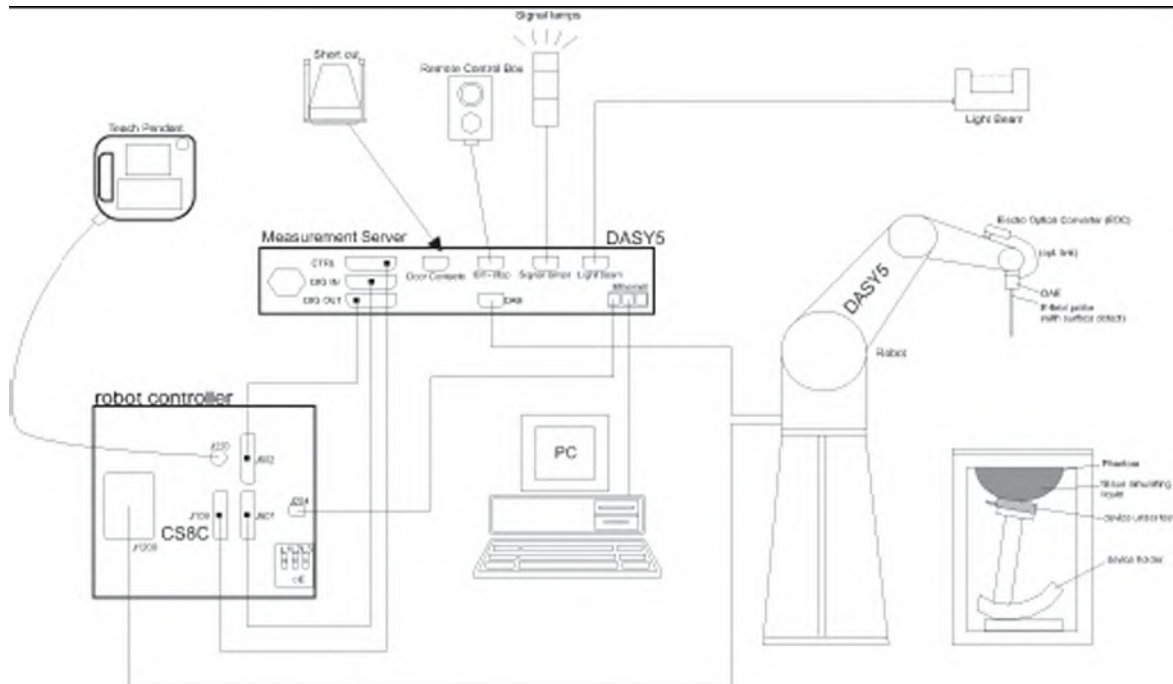

Picture C.1 SAR Lab Test Measurement Set-up

- A standard high precision 6-axis robot (Stäubli TX=RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as
- warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

C.2. DASY5 E-field Probe System

The SAR measurements were conducted with the dosimetric probe designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe is constructed using the thick film technique; with printed resistive lines on ceramic substrates. The probe is equipped with an optical multifiber line ending at the front of the probe tip. It is connected to the EOC box on the robot arm and provides an automatic detection of the phantom surface. Half of the fibers are connected to a pulsed infrared transmitter, the other half to a synchronized receiver. As the probe approaches the surface, the reflection from the surface produces a coupling from the transmitting to the receiving fibers. This reflection increases first during the approach, reaches maximum and then decreases. If the probe is flatly touching the surface, the coupling is zero. The distance of the coupling maximum to the surface is independent of the surface reflectivity and largely independent of the surface to probe angle. The DASY5 software reads the reflection during a software approach and looks for the maximum using 2nd order curve fitting. The approach is stopped at reaching the maximum.

Probe Specifications:

| | |
|-----------------------|---|
| Model: | ES3DV3, EX3DV4 |
| Frequency | 10MHz — 6.0GHz(EX3DV4) |
| Range: | 10MHz — 4GHz(ES3DV3) |
| Calibration: | In head and body simulating tissue at Frequencies from 835 up to 5800MHz |
| Linearity: | ± 0.2 dB(30 MHz to 6 GHz) for EX3DV4 ± 0.2 dB(30 MHz to 4 GHz) for ES3DV3 |
| Dynamic Range: | 10 mW/kg — 100W/kg |
| Probe Length: | 330 mm |
| Probe Tip | |
| Length: | 20 mm |
| Body Diameter: | 12 mm |
| Tip Diameter: | 2.5 mm (3.9 mm for ES3DV3) |
| Tip-Center: | 1 mm (2.0mm for ES3DV3) |
| Application: | SAR Dosimetry Testing Compliance tests of mobile phones Dosimetry in strong gradient fields |



Picture C.2 Near-field Probe



Picture C.3 E-field Probe

C.3. E-field Probe Calibration

Each E-Probe/Probe Amplifier combination has unique calibration parameters. A TEM cell calibration procedure is conducted to determine the proper amplifier settings to enter in the probe parameters. The amplifier settings are determined for a given frequency by subjecting the probe to a known E-field density (1 mW/cm²) using an RF Signal generator, TEM cell, and RF Power Meter.

The free space E-field from amplified probe outputs is determined in a test chamber. This calibration can be performed in a TEM cell if the frequency is below 1 GHz and in a waveguide or other methodologies above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees until the three channels show the maximum reading. The power density readings equates to 1 mW/ cm².

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The E-field in the medium correlates with the temperature rise in the dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$SAR = C \frac{\Delta T}{\Delta t}$$

Where:

Δt = Exposure time (30 seconds),

C = Heat capacity of tissue (brain or muscle),

ΔT = Temperature increase due to RF exposure.

$$SAR = \frac{|E|^2 \cdot \sigma}{\rho}$$

Where:

σ = Simulated tissue conductivity,

ρ = Tissue density (kg/m³).


C.4. Other Test Equipment

C.4.1. Data Acquisition Electronics (DAE)

The data acquisition electronics consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.

The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.

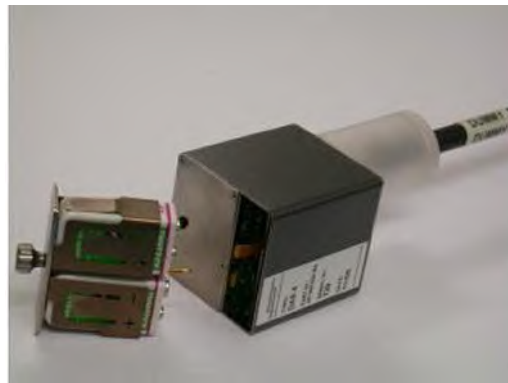

PictureC.4: DAE

C.4.2. Robot

The SPEAG DASY system uses the high precision robots (DASY5: RX160L) type from Stäubli SA (France). For the 6-axis controller system, the robot controller version from Stäubli is used. The Stäubli robot series have many features that are important for our application:

- High precision (repeatability 0.02mm)
- High reliability (industrial design)
- Low maintenance costs (virtually maintenance free due to direct drive gears; no belt drives)
- Jerk-free straight movements (brushless synchron motors; no stepper motors)
- Low ELF interference (motor control fields shielded via the closed metallic construction shields)



Picture C.5 DASY 5

C.4.3. Measurement Server

The Measurement server is based on a PC/104 CPU board with CPU (DASY5: 400 MHz, Intel Celeron), chipdisk (DASY5:128MB), RAM (DASY5:128MB). The necessary circuits for communication with the DAE electronic box, as well as the 16 bit AD converter system for optical detection and digital I/O interface are contained on the DASY I/O board, which is directly connected to the PC/104 bus of the CPU board.

The measurement server performs all real-time data evaluation of field measurements and surface detection, controls robot movements and handles safety operation. The PC operating system cannot interfere with these time critical processes. All connections are supervised by a watchdog, and disconnection of any of the cables to the measurement server will automatically disarm the robot and disable all program-controlled robot movements. Furthermore, the measurement server is equipped with an expansion port which is reserved for future applications. Please note that this expansion port does not have a standardized pinout, and therefore only devices provided by SPEAG can be connected. Devices from any other supplier could seriously damage the measurement server.



Picture C.6 Server for DASY 5

C.4.4. Device Holder for Phantom

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5mm distance, a positioning uncertainty of $\pm 0.5\text{mm}$ would produce a SAR uncertainty of $\pm 20\%$. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.

The DASY device holder is designed to cope with the different positions given in the standard. It has two scales for device rotation (with respect to the body axis) and device inclination (with respect to the line between the ear reference points). The rotation centers for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.

The DASY device holder is constructed of low-loss POM material having the following dielectric

parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

<Laptop Extension Kit>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the Mounting Device in place of the phone positioner. The extension is fully compatible with the Twin-SAM and ELI phantoms.



Picture C.7-1: Device Holder



Picture C.7-2: Laptop Extension Kit

C.4.5. Phantom

The SAM Twin Phantom V4.0 is constructed of a fiberglass shell integrated in a table. The shape of the shell is based on data from an anatomical study designed to represent the 90th percentile of the population. The phantom enables the dissymmetric evaluation of SAR for both left and right handed handset usage, as well as body-worn usage using the flat phantom region. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot. The shell phantom has a 2mm shell thickness (except the ear region where shell thickness increases to 6 mm).

Shell Thickness: 2 ± 0.2 mm
Filling Volume: Approx. 25 liters
Dimensions: 810 x 1000 x 500 mm (H x L x W)
Available: Special




Picture C.8: SAM Twin Phantom

ANNEX D: Position of the wireless device in relation to the phantom


D.1. General considerations

This standard specifies two handset test positions against the head phantom – the “cheek” position and the “tilt” position.

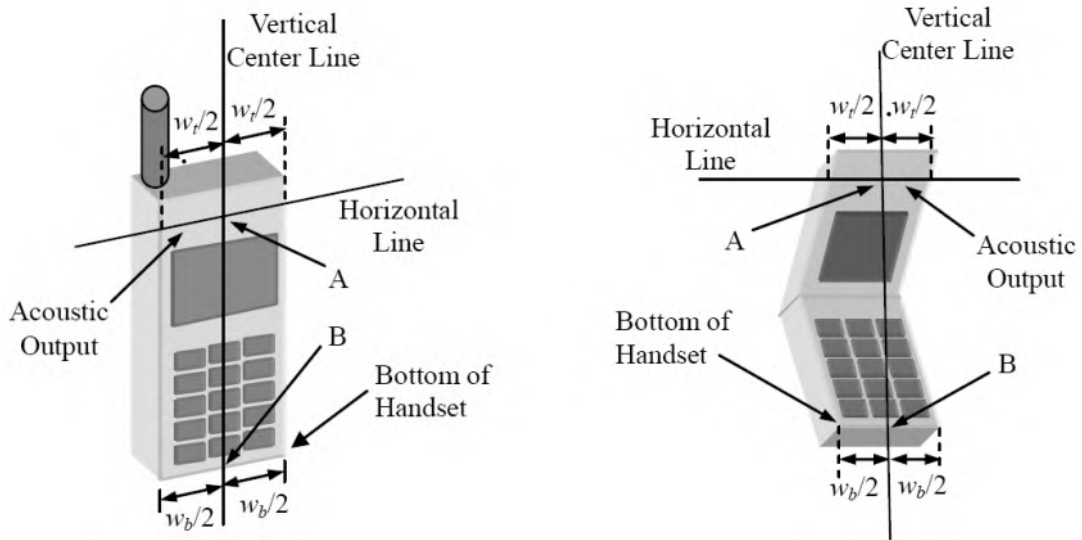


- w_t Width of the handset at the level of the acoustic
- w_b Width of the bottom of the handset
- A Midpoint of the width w_t of the handset at the level of the acoustic output
- B Midpoint of the width w_b of the bottom of the handset

Picture D.1-a Typical “fixed” case handset Picture D.1-b Typical “clam-shell” case handset

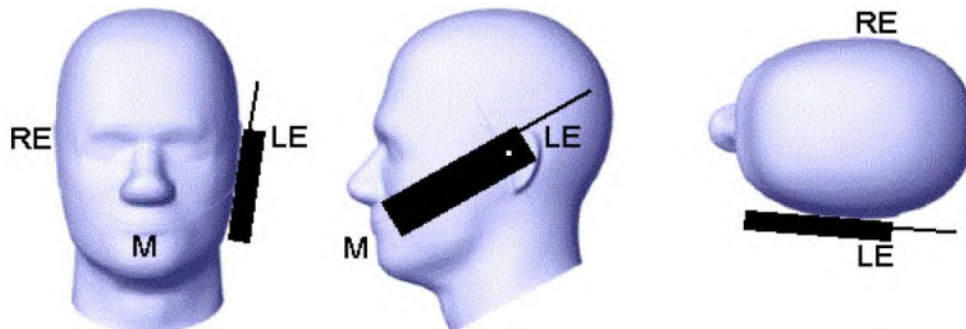


Picture D.2 Cheek position of the wireless device on the left side of SAM

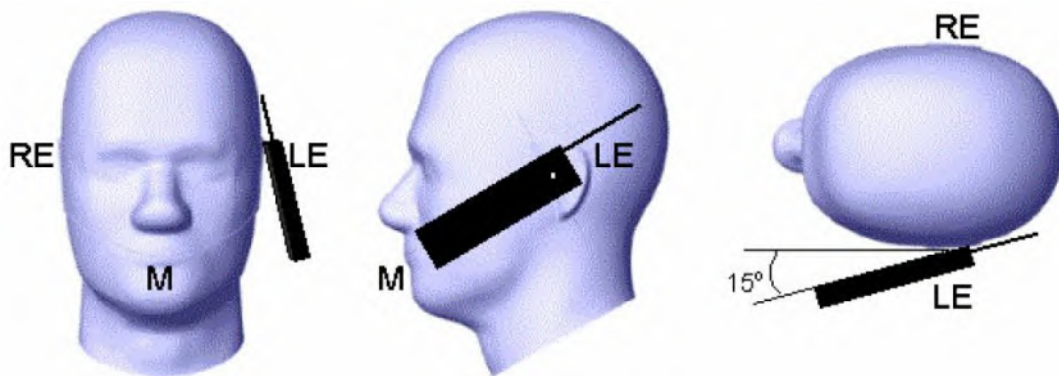

Picture D.3 Tilt position of the wireless device on the left side of SAM

D.2. Body-worn device

A typical example of a body-worn device is a mobile phone, wireless enabled PDA or other battery operated wireless device with the ability to transmit while mounted on a person's body using a carry accessory approved by the wireless device manufacturer.

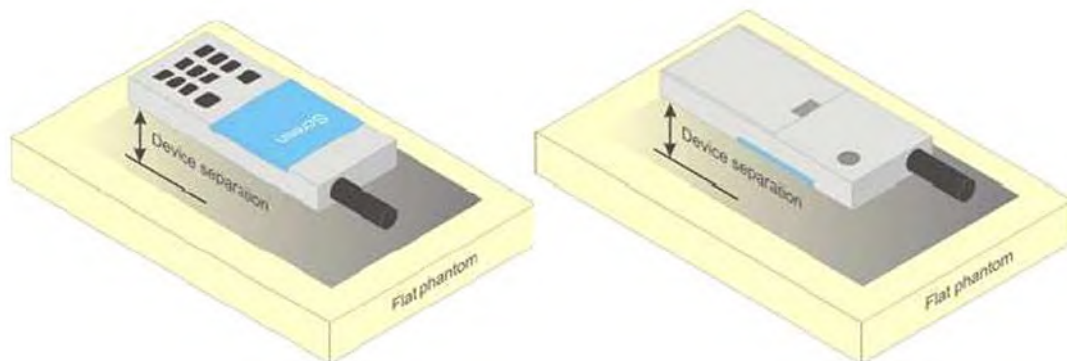


Picture D.4 Test positions for body-worn devices

D.3. Desktop device

A typical example of a desktop device is a wireless enabled desktop computer placed on a table or desk when used.

The DUT shall be positioned at the distance and in the orientation to the phantom that corresponds to the intended use as specified by the manufacturer in the user instructions. For devices that employ an external antenna with variable positions, tests shall be performed for all antenna positions specified. Picture 8.5 show positions for desktop device SAR tests. If the intended use is not specified, the device shall be tested directly against the flat phantom.

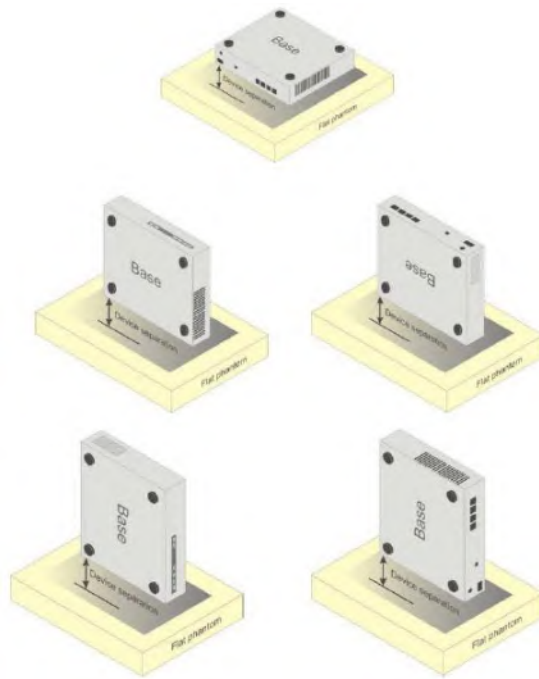

Picture D.5 Test positions for desktop devices

D.4. DUT Setup Photos



Picture D.6

ANNEX E: Equivalent Media Recipes

The liquid used for the frequency range of 700-6000 MHz consisted of water, sugar, salt, preventol, glycol monobutyl and Cellulose. The liquid has been previously proven to be suited for worst-case. The Table E.1 shows the detail solution. It's satisfying the latest tissue dielectric parameters requirements proposed by the IEEE 1528 and IEC 62209.

Table E.1: Composition of the Tissue Equivalent Matter

| Frequency (MHz) | 835 | 1750 | 1900 | 2450 | 2600 | 5200 | 5800 |
|------------------------------------|----------------------------------|-----------------------------------|----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|
| Water | 41.45 | 55.242 | 55.242 | 58.79 | 58.79 | 65.53 | 66.10 |
| Sugar | 56.0 | / | / | / | / | / | / |
| Salt | 1.45 | 0.306 | 0.306 | 0.06 | 0.06 | | |
| Preventol | 0.1 | / | / | / | / | 17.24 | 16.95 |
| Cellulose | 1.0 | / | / | / | / | 17.24 | 16.95 |
| Glycol Monobutyl | / | 44.452 | 44.452 | 41.15 | 41.15 | / | / |
| Diethylenglycol monohexylether | / | / | / | / | / | / | / |
| Triton X-100 | / | / | / | / | / | / | / |
| Dielectric Parameters Target Value | $\epsilon=41.5$ $\sigma=0.90$ | $\epsilon=40.08$ $\sigma=1.37$ | $\epsilon=40.0$ $\sigma=1.40$ | $\epsilon=39.20$ $\sigma=1.80$ | $\epsilon=39.01$ $\sigma=1.96$ | $\epsilon=35.99$ $\sigma=4.66$ | $\epsilon=35.30$ $\sigma=5.27$ |

Note: There is a little adjustment respectively for 750, 5300 and 5600, based on the recipe of closest frequency in table E.1

ANNEX F: System Validation

The SAR system must be validated against its performance specifications before it is deployed. When SAR probes, system components or software are changed, upgraded or recalibrated, these must be validated with the SAR system(s) that operates with such components.

Table F.1: System Validation

| Probe SN. | Liquid name | Validation date | Frequency point | Status (OK or Not) |
|-----------|--------------|-----------------|-----------------|--------------------|
| 3151 | Head 750MHz | 2021-04-29 | 750 MHz | OK |
| 3151 | Head 835MHz | 2021-04-29 | 835 MHz | OK |
| 3151 | Head 1750MHz | 2021-04-29 | 1750 MHz | OK |
| 3151 | Head 1900MHz | 2021-04-29 | 1900 MHz | OK |
| 3151 | Head 2450MHz | 2021-04-30 | 2450 MHz | OK |
| 3151 | Head 2550MHz | 2021-04-30 | 2550 MHz | OK |
| 3753 | Head 5250MHz | 2021-12-27 | 5250 MHz | OK |
| 3753 | Head 5600MHz | 2021-12-27 | 5600 MHz | OK |
| 3753 | Head 5750MHz | 2021-12-27 | 5750 MHz | OK |



ANNEX G: DAE Calibration Certificate



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)



中国认可
国际互认
校准
CALIBRATION
CNAS L0570

Client : **CTTL(South Branch)**

Certificate No: **Z21-60093**

| CALIBRATION CERTIFICATE | | | |
|---|--|--|------------------------|
| Object | DAE4 - SN: 786 | | |
| Calibration Procedure(s) | FF-Z11-002-01 Calibration Procedure for the Data Acquisition Electronics (DAEx) | | |
| Calibration date: | April 09, 2021 | | |
| This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate. | | | |
| All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)°C and humidity<70%. | | | |
| Calibration Equipment used (M&TE critical for calibration) | | | |
| Primary Standards | ID # | Cal Date(Calibrated by, Certificate No.) | Scheduled Calibration |
| Process Calibrator 753 | 1971018 | 16-Jun-20 (CTTL, No.J20X04342) | Jun-21 |
| Calibrated by: | Name | Function | Signature |
| | Yu Zongying | SAR Test Engineer | |
| Reviewed by: | Lin Hao | SAR Test Engineer | |
| Approved by: | Qi Dianyuan | SAR Project Leader | |
| | | | Issued: April 11, 2021 |
| This calibration certificate shall not be reproduced except in full without written approval of the laboratory. | | | |



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504
E-mail: ctt1@chinattl.com Http://www.chinattl.cn

Glossary:

DAE data acquisition electronics
Connector angle information used in DASY system to align probe sensor X to the robot coordinate system.

Methods Applied and Interpretation of Parameters:

- *DC Voltage Measurement:* Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- *Connector angle:* The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The report provide only calibration results for DAE, it does not contain other performance test results.



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504
E-mail: ttl@chinatl.com Http: www.chinatl.cn

DC Voltage Measurement

A/D - Converter Resolution nominal
High Range: 1LSB = 6.1μV, full range = -100...+300 mV
Low Range: 1LSB = 61nV, full range = -1.....+3mV
DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

| Calibration Factors | X | Y | Z |
|---------------------|-----------------------|-----------------------|-----------------------|
| High Range | 404.112 ± 0.15% (k=2) | 404.269 ± 0.15% (k=2) | 404.666 ± 0.15% (k=2) |
| Low Range | 3.97192 ± 0.7% (k=2) | 3.97396 ± 0.7% (k=2) | 3.95762 ± 0.7% (k=2) |

Connector Angle

| | |
|---|-----------|
| Connector Angle to be used in DASY system | 229° ± 1° |
|---|-----------|



ANNEX H: Probe Calibration Certificate

Probe ES3DV3-SN: 3151 Calibration Certificate (2021-04-26)

In Collaboration with

S P E A G
 CALIBRATION LABORATORY

Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
 Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504
 E-mail: ctl@chinattl.com <http://www.chinattl.cn>



中国认可
 国际互认
 校准
 CALIBRATION
 CNAS L0570

Client **CTTL(South Branch)**

Certificate No: **Z21-60094**

CALIBRATION CERTIFICATE

Object: ES3DV3 - SN : 3151

Calibration Procedure(s): FF-Z11-004-02
 Calibration Procedures for Dosimetric E-field Probes

Calibration date: April 26, 2021

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility; environment temperature(22±3)°C and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID # | Cal Date(Calibrated by, Certificate No.) | Scheduled Calibration |
|--------------------------|-------------|--|-----------------------|
| Power Meter NRP2 | 101919 | 16-Jun-20(CTTL, No.J20X04344) | Jun-21 |
| Power sensor NRP-Z91 | 101547 | 16-Jun-20(CTTL, No.J20X04344) | Jun-21 |
| Power sensor NRP-Z91 | 101548 | 16-Jun-20(CTTL, No.J20X04344) | Jun-21 |
| Reference 10dBAttenuator | 18N50W-10dB | 10-Feb-20(CTTL, No.J20X00525) | Feb-22 |
| Reference 20dBAttenuator | 18N50W-20dB | 10-Feb-20(CTTL, No.J20X00526) | Feb-22 |
| Reference Probe EX3DV4 | SN 3617 | 27-Jan-21(SPEAG, No.EX3-3617_Jan21) | Jan-22 |
| DAE4 | SN 1556 | 15-Jan-21(SPEAG, No.DAE4-1556_Jan21) | Jan-22 |
| Secondary Standards | ID # | Cal Date(Calibrated by, Certificate No.) | Scheduled Calibration |
| SignalGenerator MG3700A | 6201052605 | 23-Jun-20(CTTL, No.J20X04343) | Jun-21 |
| Network Analyzer E5071C | MY46110673 | 21-Jan-21(CTTL, No.J20X00515) | Jan-22 |

| | Name | Function | Signature |
|----------------|-------------|--------------------|---|
| Calibrated by: | Yu Zongying | SAR Test Engineer |  |
| Reviewed by: | Lin Hao | SAR Test Engineer |  |
| Approved by: | Qi Dianyuan | SAR Project Leader |  |

Issued: April 28, 2021

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Glossary:

| | |
|-----------------------|--|
| TSL | tissue simulating liquid |
| NORM _{x,y,z} | sensitivity in free space |
| ConvF | sensitivity in TSL / NORM _{x,y,z} |
| DCP | diode compression point |
| CF | crest factor (1/duty_cycle) of the RF signal |
| A,B,C,D | modulation dependent linearization parameters |
| Polarization Φ | Φ rotation around probe axis |
| Polarization θ | θ rotation around an axis that is in the plane normal to probe axis (at measurement center), $\theta=0$ is normal to probe axis |

Connector Angle information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

- *NORM_{x,y,z}*: Assessed for E-field polarization $\theta=0$ ($f \leq 900\text{MHz}$ in TEM-cell; $f > 1800\text{MHz}$: waveguide). *NORM_{x,y,z}* are only intermediate values, i.e., the uncertainties of *NORM_{x,y,z}* does not effect the E^2 -field uncertainty inside TSL (see below ConvF).
- *NORM(f)_{x,y,z} = NORM_{x,y,z} * frequency_response* (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- *DCP_{x,y,z}*: DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- PAR: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics.
- *A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; VR_{x,y,z}; A,B,C* are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- *ConvF and Boundary Effect Parameters*: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800\text{MHz}$) and inside waveguide using analytical field distributions based on power measurements for $f > 800\text{MHz}$. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty valued are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to *NORM_{x,y,z} * ConvF* whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from $\pm 50\text{MHz}$ to $\pm 100\text{MHz}$.
- *Spherical isotropy (3D deviation from isotropy)*: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- *Sensor Offset*: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- *Connector Angle*: The angle is assessed using the information gained by determining the *NORM_x* (no uncertainty required).



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
 Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504
 E-mail: ctl@chinantl.com <http://www.chinantl.cn>

DASY/EASY – Parameters of Probe: ES3DV3 – SN:3151

Basic Calibration Parameters

| | Sensor X | Sensor Y | Sensor Z | Unc (k=2) |
|--|----------|----------|----------|--------------|
| Norm($\mu\text{V}/(\text{V}/\text{m})^2$) ^A | 1.17 | 1.25 | 1.20 | $\pm 10.0\%$ |
| DCP(mV) ^B | 105.1 | 105.5 | 103.7 | |

Modulation Calibration Parameters

| UID | Communication System Name | | A dB | B dB· μV | C | D dB | VR mV | Unc ^E (k=2) |
|-----|---------------------------|---|---------|------------------------|-----|---------|----------|---------------------------|
| 0 | CW | X | 0.0 | 0.0 | 1.0 | 0.00 | 277.8 | $\pm 2.2\%$ |
| | | Y | 0.0 | 0.0 | 1.0 | | 288.5 | |
| | | Z | 0.0 | 0.0 | 1.0 | | 279.6 | |

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor $k=2$, which for a normal distribution Corresponds to a coverage probability of approximately 95%.

^A The uncertainties of Norm X, Y, Z do not affect the E^2 -field uncertainty inside TSL (see Page 4).

^B Numerical linearization parameter; uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

DASY/EASY – Parameters of Probe: ES3DV3 – SN:3151

Calibration Parameter Determined in Head Tissue Simulating Media

| f [MHz] ^C | Relative Permittivity ^F | Conductivity (S/m) ^F | ConvF X | ConvF Y | ConvF Z | Alpha ^G | Depth ^G (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-------------|
| 750 | 41.9 | 0.89 | 6.40 | 6.40 | 6.40 | 0.40 | 1.40 | ±12.1% |
| 900 | 41.5 | 0.97 | 6.19 | 6.19 | 6.19 | 0.37 | 1.57 | ±12.1% |
| 1450 | 40.5 | 1.20 | 5.48 | 5.48 | 5.48 | 0.31 | 1.61 | ±12.1% |
| 1750 | 40.1 | 1.37 | 5.25 | 5.25 | 5.25 | 0.61 | 1.27 | ±12.1% |
| 1900 | 40.0 | 1.40 | 5.09 | 5.09 | 5.09 | 0.65 | 1.25 | ±12.1% |
| 2000 | 40.0 | 1.40 | 5.07 | 5.07 | 5.07 | 0.63 | 1.29 | ±12.1% |
| 2300 | 39.5 | 1.67 | 4.83 | 4.83 | 4.83 | 0.60 | 1.36 | ±12.1% |
| 2450 | 39.2 | 1.80 | 4.58 | 4.58 | 4.58 | 0.60 | 1.45 | ±12.1% |
| 2600 | 39.0 | 1.96 | 4.39 | 4.39 | 4.39 | 0.70 | 1.33 | ±12.1% |

^C Frequency validity above 300 MHz of ±100MHz only applies for DASY v4.4 and higher (Page 2), else it is restricted to ±50MHz. The uncertainty is the RSS of ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.


^F At frequency below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ±10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ±5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for the frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com <http://www.chinattl.cn>

Frequency Response of E-Field (TEM-Cell: ifi110 EXX, Waveguide: R22)

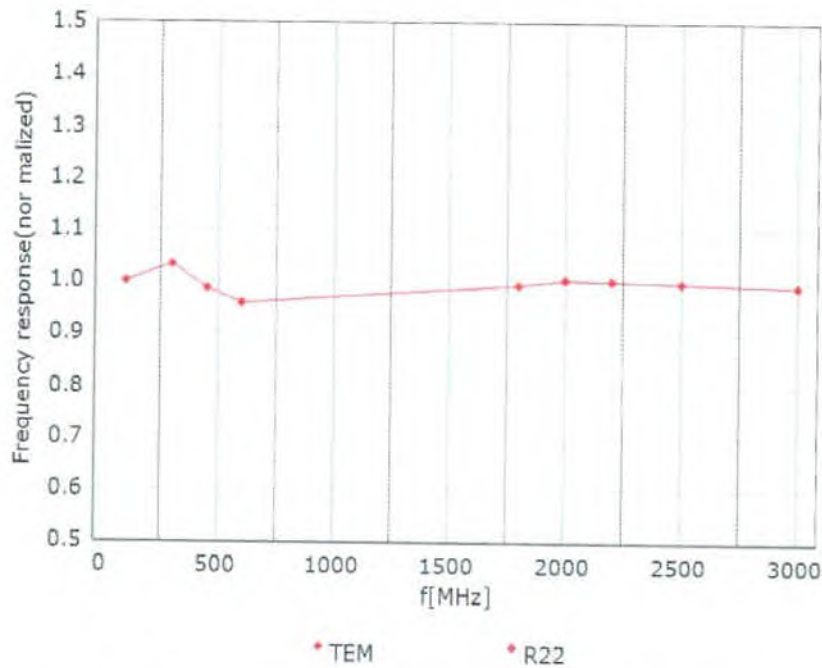

Uncertainty of Frequency Response of E-field: $\pm 7.4\%$ ($k=2$)






Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
 Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504
 E-mail: cttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)

Receiving Pattern (Φ), $\theta=0^\circ$



f=600 MHz, TEM

f=1800 MHz, R22

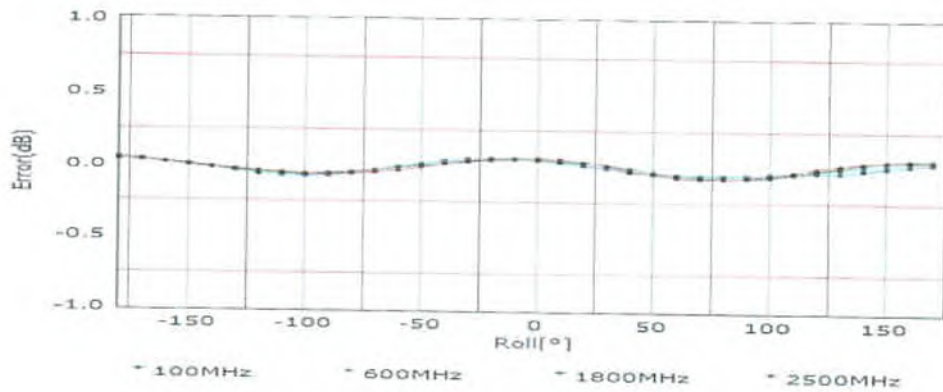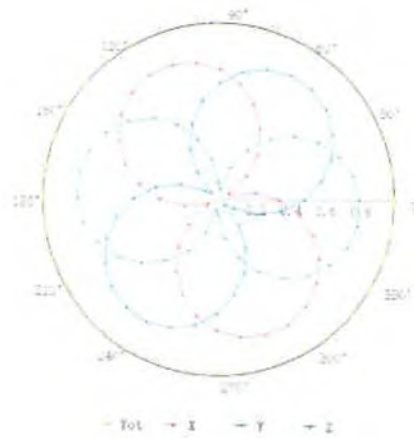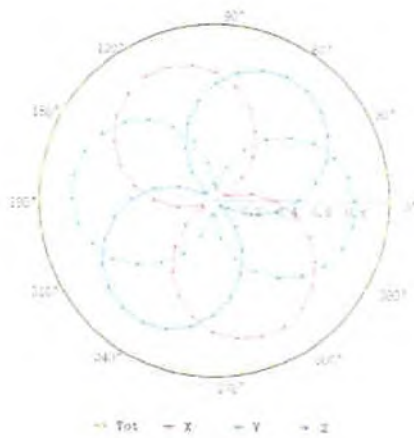

Uncertainty of Axial Isotropy Assessment: $\pm 1.2\%$ ($k=2$)

Dynamic Range f(SAR_{head}) (TEM cell, f = 900 MHz)

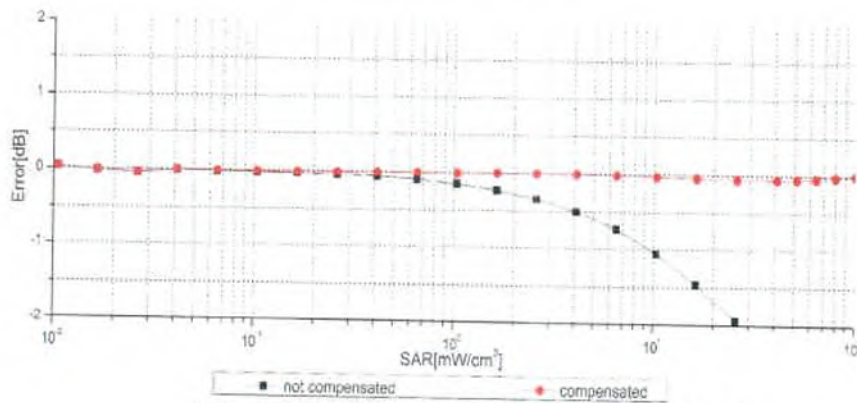
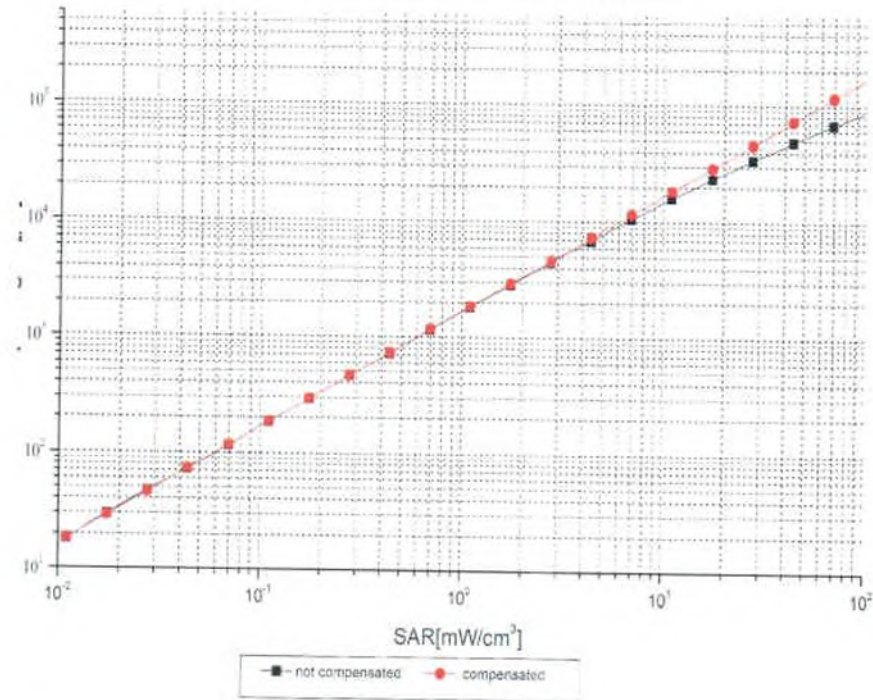


Uncertainty of Linearity Assessment: ±0.9% (k=2)


Conversion Factor Assessment

f=750 MHz,WGLS R9(H_convF)

f=1750 MHz,WGLS R22(H_convF)

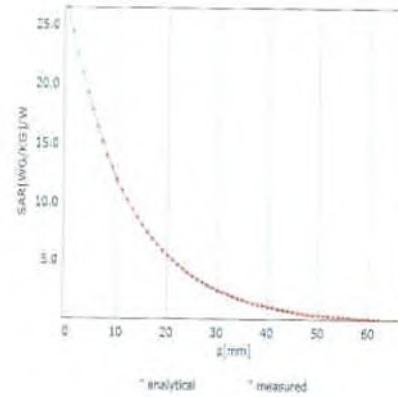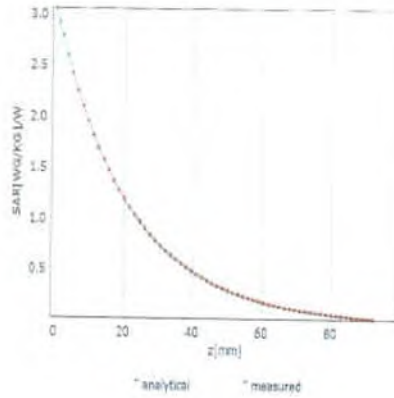

Deviation from Isotropy in Liquid

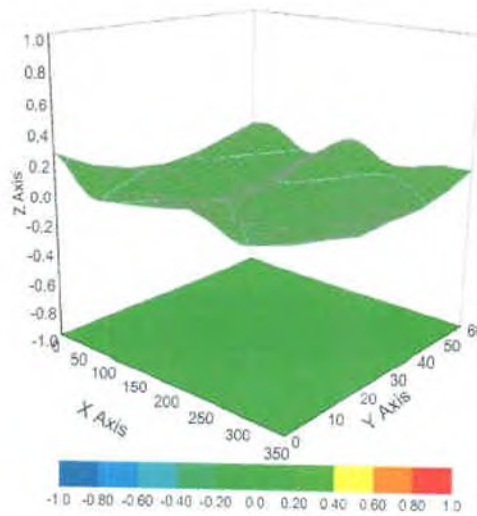

Uncertainty of Spherical Isotropy Assessment: $\pm 3.2\%$ ($k=2$)



DASY/EASY – Parameters of Probe: ES3DV3 – SN:3151

Other Probe Parameters

| | |
|---|------------|
| Sensor Arrangement | Triangular |
| Connector Angle (°) | 87.5 |
| Mechanical Surface Detection Mode | enabled |
| Optical Surface Detection Mode | disable |
| Probe Overall Length | 337mm |
| Probe Body Diameter | 10mm |
| Tip Length | 10mm |
| Tip Diameter | 4mm |
| Probe Tip to Sensor X Calibration Point | 2mm |
| Probe Tip to Sensor Y Calibration Point | 2mm |
| Probe Tip to Sensor Z Calibration Point | 2mm |
| Recommended Measurement Distance from Surface | 3mm |



Probe EX3DV4-SN: 3753 Calibration Certificate (2021-07-26)

Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'etalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Client Auden

Certificate No: EX3-3753_Jul21

CALIBRATION CERTIFICATE

Object EX3DV4 - SN:3753
Calibration procedure(s) QA CAL-01.v9, QA CAL-14.v6, QA CAL-23.v5, QA CAL-25.v7
Calibration procedure for dosimetric E-field probes
Calibration date: July 26, 2021

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Table with 4 columns: Primary Standards, ID, Cal Date (Certificate No.), Scheduled Calibration. Includes rows for Power meter NRP, Power sensor NRP-Z91, Reference 20 dB Attenuator, DAE4, Reference Probe ES3DV2, Secondary Standards, and various equipment like Power meter E4419B, RF generator HP 8648C, etc.

Calibrated by: Michael Weber, Laboratory Technician
Approved by: Katja Pokovic, Technical Manager
Signature: [Signatures]
Issued: July 28, 2021
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

| | |
|--------------------------|---|
| TSL | tissue simulating liquid |
| NORM _{x,y,z} | sensitivity in free space |
| ConvF | sensitivity in TSL / NORM _{x,y,z} |
| DCP | diode compression point |
| CF | crest factor (1/duty_cycle) of the RF signal |
| A, B, C, D | modulation dependent linearization parameters |
| Polarization φ | φ rotation around probe axis |
| Polarization ϑ | ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis |
| Connector Angle | information used in DASY system to align probe sensor X to the robot coordinate system |

Calibration is Performed According to the Following Standards:

- a) IEC/IEEE 62209-1528, "Measurement Procedure For The Assessment Of Specific Absorption Rate Of Human Exposure To Radio Frequency Fields From Hand-Held And Body-Worn Wireless Communication Devices - Part 1528: Human Models, Instrumentation And Procedures (Frequency Range of 4 MHz to 10 GHz)", October 2020.
- b) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

- **NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E^2 -field uncertainty inside TSL (see below ConvF).
- **NORM(f)_{x,y,z} = NORM_{x,y,z} * frequency_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- **DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- **PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- **A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}; VR_{x,y,z}**: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- **ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- **Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- **Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- **Connector Angle**: The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).

EX3DV4 – SN:3753

July 26, 2021

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3753

Basic Calibration Parameters

| | Sensor X | Sensor Y | Sensor Z | Unc (k=2) |
|--|----------|----------|----------|-----------|
| Norm ($\mu\text{V}/(\text{V/m})^2$) ^A | 0.45 | 0.33 | 0.44 | ± 10.1 % |
| DCP (mV) ^B | 104.2 | 109.6 | 103.2 | |

Calibration Results for Modulation Response

| UID | Communication System Name | | A dB | B dB μV | C | D dB | VR mV | Max dev. | Max Unc ^E (k=2) |
|-----------|-----------------------------|---|---------|-----------------------|-------|---------|----------|-------------|----------------------------------|
| 0 | CW | X | 0.00 | 0.00 | 1.00 | 0.00 | 188.1 | ± 3.0 % | ± 4.7 % |
| | | Y | 0.00 | 0.00 | 1.00 | | 172.1 | | |
| | | Z | 0.00 | 0.00 | 1.00 | | 184.3 | | |
| 10352-AAA | Pulse Waveform (200Hz, 10%) | X | 20.00 | 96.95 | 24.04 | 10.00 | 60.0 | ± 3.7 % | ± 9.6 % |
| | | Y | 6.00 | 74.00 | 15.00 | | 60.0 | | |
| | | Z | 20.00 | 95.83 | 23.37 | | 60.0 | | |
| 10353-AAA | Pulse Waveform (200Hz, 20%) | X | 20.00 | 98.70 | 24.06 | 6.99 | 80.0 | ± 1.7 % | ± 9.6 % |
| | | Y | 3.07 | 69.44 | 12.10 | | 80.0 | | |
| | | Z | 20.00 | 98.07 | 23.62 | | 80.0 | | |
| 10354-AAA | Pulse Waveform (200Hz, 40%) | X | 20.00 | 104.65 | 25.74 | 3.98 | 95.0 | ± 1.4 % | ± 9.6 % |
| | | Y | 3.53 | 74.02 | 12.72 | | 95.0 | | |
| | | Z | 20.00 | 104.91 | 25.72 | | 95.0 | | |
| 10355-AAA | Pulse Waveform (200Hz, 60%) | X | 20.00 | 112.40 | 28.09 | 2.22 | 120.0 | ± 1.4 % | ± 9.6 % |
| | | Y | 20.00 | 91.46 | 17.03 | | 120.0 | | |
| | | Z | 20.00 | 114.17 | 28.75 | | 120.0 | | |
| 10387-AAA | QPSK Waveform, 1 MHz | X | 1.67 | 65.55 | 14.77 | 1.00 | 150.0 | ± 2.1 % | ± 9.6 % |
| | | Y | 1.72 | 68.18 | 15.87 | | 150.0 | | |
| | | Z | 1.70 | 66.39 | 15.18 | | 150.0 | | |
| 10388-AAA | QPSK Waveform, 10 MHz | X | 2.18 | 67.27 | 15.40 | 0.00 | 150.0 | ± 1.1 % | ± 9.6 % |
| | | Y | 2.23 | 68.96 | 16.32 | | 150.0 | | |
| | | Z | 2.22 | 67.96 | 15.80 | | 150.0 | | |
| 10396-AAA | 64-QAM Waveform, 100 kHz | X | 3.09 | 71.51 | 19.26 | 3.01 | 150.0 | ± 0.8 % | ± 9.6 % |
| | | Y | 3.11 | 73.01 | 19.79 | | 150.0 | | |
| | | Z | 3.22 | 72.55 | 19.77 | | 150.0 | | |
| 10399-AAA | 64-QAM Waveform, 40 MHz | X | 3.50 | 66.89 | 15.62 | 0.00 | 150.0 | ± 0.8 % | ± 9.6 % |
| | | Y | 3.50 | 67.71 | 16.04 | | 150.0 | | |
| | | Z | 3.52 | 67.20 | 15.82 | | 150.0 | | |
| 10414-AAA | WLAN CCDF, 64-QAM, 40MHz | X | 4.87 | 65.59 | 15.44 | 0.00 | 150.0 | ± 1.6 % | ± 9.6 % |
| | | Y | 4.77 | 66.09 | 15.67 | | 150.0 | | |
| | | Z | 4.86 | 65.77 | 15.56 | | 150.0 | | |

Note: For details on UID parameters see Appendix

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of Norm X,Y,Z do not affect the E²-field uncertainty inside TSL (see Page 5).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.



EX3DV4- SN:3753

July 26, 2021

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3753**Sensor Model Parameters**

| | C1 fF | C2 fF | α V ⁻¹ | T1 ms.V ⁻² | T2 ms.V ⁻¹ | T3 ms | T4 V ⁻² | T5 V ⁻¹ | T6 |
|---|----------|----------|-----------------------------|--------------------------|--------------------------|----------|-----------------------|-----------------------|------|
| X | 45.3 | 330.88 | 34.13 | 19.76 | 0.00 | 5.10 | 1.97 | 0.09 | 1.01 |
| Y | 36.3 | 255.61 | 32.23 | 9.30 | 0.94 | 4.94 | 2.00 | 0.01 | 1.01 |
| Z | 42.8 | 311.98 | 34.03 | 18.61 | 0.00 | 5.10 | 2.00 | 0.08 | 1.01 |

Other Probe Parameters

| | |
|---|------------|
| Sensor Arrangement | Triangular |
| Connector Angle (°) | -139.4 |
| Mechanical Surface Detection Mode | enabled |
| Optical Surface Detection Mode | disabled |
| Probe Overall Length | 337 mm |
| Probe Body Diameter | 10 mm |
| Tip Length | 9 mm |
| Tip Diameter | 2.5 mm |
| Probe Tip to Sensor X Calibration Point | 1 mm |
| Probe Tip to Sensor Y Calibration Point | 1 mm |
| Probe Tip to Sensor Z Calibration Point | 1 mm |
| Recommended Measurement Distance from Surface | 1.4 mm |

Note: Measurement distance from surface can be increased to 3-4 mm for an *Area Scan* job.



EX3DV4- SN:3753

July 26, 2021

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3753

Calibration Parameter Determined in Head Tissue Simulating Media


| f (MHz) ^c | Relative Permittivity ^f | Conductivity (S/m) ^f | ConvF X | ConvF Y | ConvF Z | Alpha ^g | Depth ^g (mm) | Unc (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-----------|
| 750 | 41.9 | 0.89 | 9.41 | 9.41 | 9.41 | 0.51 | 0.87 | ± 12.0 % |
| 835 | 41.5 | 0.90 | 9.19 | 9.19 | 9.19 | 0.53 | 0.82 | ± 12.0 % |
| 900 | 41.5 | 0.97 | 8.91 | 8.91 | 8.91 | 0.52 | 0.80 | ± 12.0 % |
| 1450 | 40.5 | 1.20 | 8.33 | 8.33 | 8.33 | 0.60 | 0.80 | ± 12.0 % |
| 1640 | 40.2 | 1.31 | 8.19 | 8.19 | 8.19 | 0.35 | 0.80 | ± 12.0 % |
| 1750 | 40.1 | 1.37 | 8.08 | 8.08 | 8.08 | 0.36 | 0.86 | ± 12.0 % |
| 1900 | 40.0 | 1.40 | 7.78 | 7.78 | 7.78 | 0.35 | 0.86 | ± 12.0 % |
| 2000 | 40.0 | 1.40 | 7.66 | 7.66 | 7.66 | 0.41 | 0.86 | ± 12.0 % |
| 2300 | 39.5 | 1.67 | 7.50 | 7.50 | 7.50 | 0.39 | 0.90 | ± 12.0 % |
| 2450 | 39.2 | 1.80 | 7.22 | 7.22 | 7.22 | 0.39 | 0.95 | ± 12.0 % |
| 2600 | 39.0 | 1.96 | 7.04 | 7.04 | 7.04 | 0.44 | 0.95 | ± 12.0 % |
| 3300 | 38.2 | 2.71 | 6.69 | 6.69 | 6.69 | 0.35 | 1.30 | ± 13.1 % |
| 3500 | 37.9 | 2.91 | 6.64 | 6.64 | 6.64 | 0.35 | 1.30 | ± 13.1 % |
| 3700 | 37.7 | 3.12 | 6.55 | 6.55 | 6.55 | 0.35 | 1.30 | ± 13.1 % |
| 3900 | 37.5 | 3.32 | 6.37 | 6.37 | 6.37 | 0.40 | 1.60 | ± 13.1 % |
| 4100 | 37.2 | 3.53 | 6.24 | 6.24 | 6.24 | 0.40 | 1.60 | ± 13.1 % |
| 4200 | 37.1 | 3.63 | 6.17 | 6.17 | 6.17 | 0.40 | 1.60 | ± 13.1 % |
| 4400 | 36.9 | 3.84 | 6.11 | 6.11 | 6.11 | 0.40 | 1.70 | ± 13.1 % |
| 4600 | 36.7 | 4.04 | 6.08 | 6.08 | 6.08 | 0.40 | 1.70 | ± 13.1 % |
| 4800 | 36.4 | 4.25 | 6.05 | 6.05 | 6.05 | 0.40 | 1.70 | ± 13.1 % |
| 4950 | 36.3 | 4.40 | 5.80 | 5.80 | 5.80 | 0.40 | 1.80 | ± 13.1 % |
| 5250 | 35.9 | 4.71 | 4.56 | 4.56 | 4.56 | 0.40 | 1.80 | ± 13.1 % |
| 5600 | 35.5 | 5.07 | 4.42 | 4.42 | 4.42 | 0.40 | 1.80 | ± 13.1 % |
| 5750 | 35.4 | 5.22 | 4.65 | 4.65 | 4.65 | 0.40 | 1.80 | ± 13.1 % |

^c Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Validity of ConvF assessed at 6 MHz is 4-9 MHz, and ConvF assessed at 13 MHz is 9-19 MHz. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^f At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.



^g Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

Frequency Response of E-Field (TEM-Cell: ifi110 EXX, Waveguide: R22)

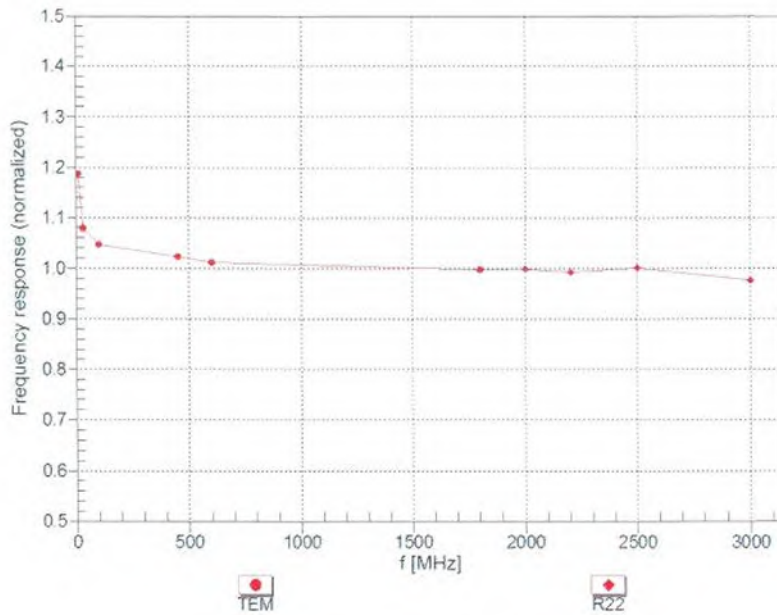

Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

Receiving Pattern (ϕ), $\theta = 0^\circ$

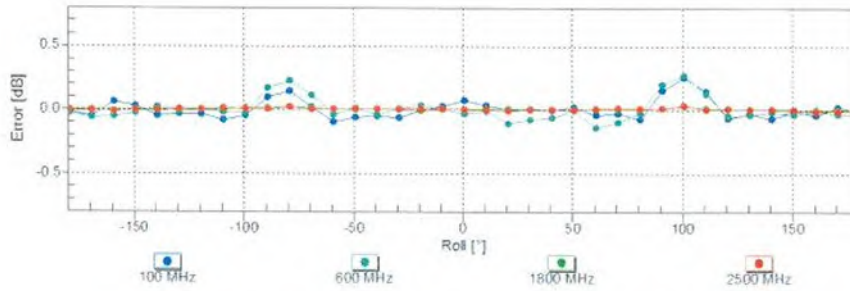
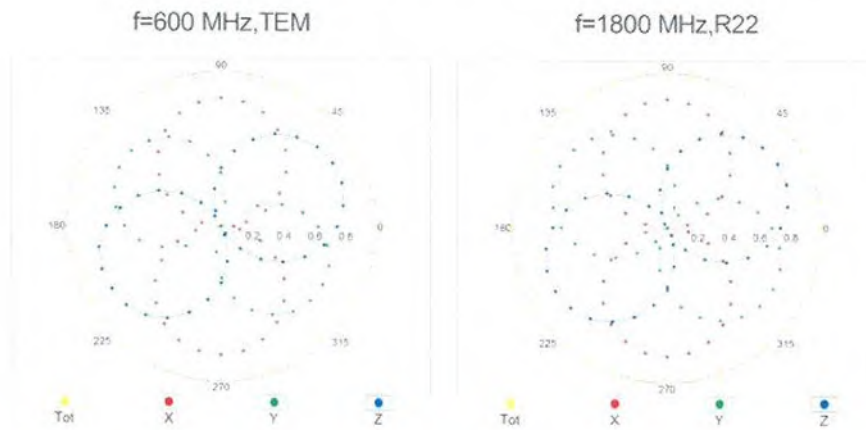


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ (k=2)

EX3DV4- SN:3753

July 26, 2021

Dynamic Range $f(SAR_{head})$ (TEM cell , $f_{eval}= 1900$ MHz)

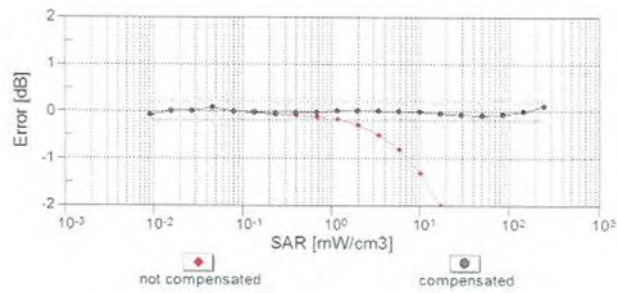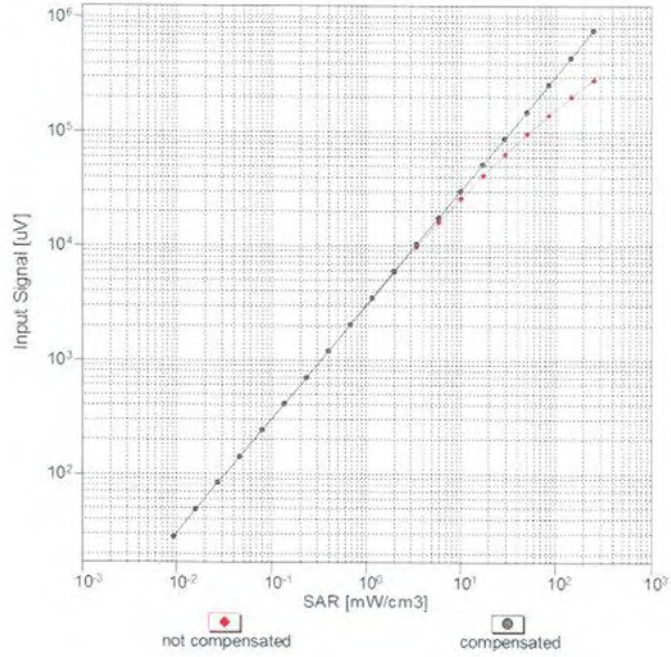


Uncertainty of Linearity Assessment: $\pm 0.6\%$ (k=2)


EX3DV4- SN:3753

July 26, 2021

Conversion Factor Assessment

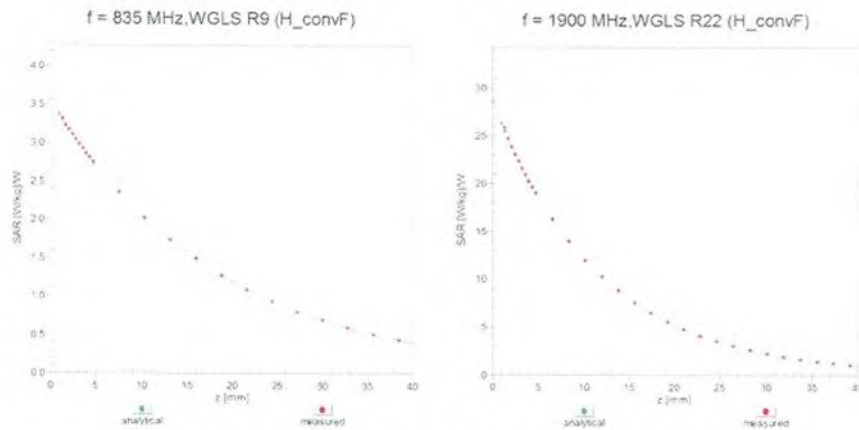

Deviation from Isotropy in Liquid Error (ϕ, θ), f = 900 MHz

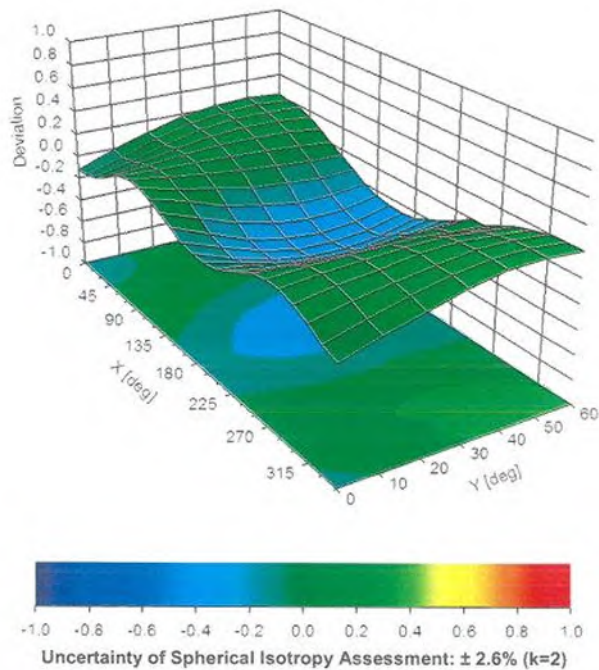



EX3DV4- SN:3753

July 26, 2021

Appendix: Modulation Calibration Parameters

| UID | Rev | Communication System Name | Group | PAR (dB) | Unc ^E (k=2) |
|-------|-----|---|-----------|----------|------------------------|
| 0 | | CW | CW | 0.00 | ± 4.7 % |
| 10010 | CAA | SAR Validation (Square, 100ms, 10ms) | Test | 10.00 | ± 9.6 % |
| 10011 | CAB | UMTS-FDD (WCDMA) | WCDMA | 2.91 | ± 9.6 % |
| 10012 | CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps) | WLAN | 1.87 | ± 9.6 % |
| 10013 | CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps) | WLAN | 9.46 | ± 9.6 % |
| 10021 | DAC | GSM-FDD (TDMA, GMSK) | GSM | 9.39 | ± 9.6 % |
| 10023 | DAC | GPRS-FDD (TDMA, GMSK, TN 0) | GSM | 9.57 | ± 9.6 % |
| 10024 | DAC | GPRS-FDD (TDMA, GMSK, TN 0-1) | GSM | 6.56 | ± 9.6 % |
| 10025 | DAC | EDGE-FDD (TDMA, 8PSK, TN 0) | GSM | 12.62 | ± 9.6 % |
| 10026 | DAC | EDGE-FDD (TDMA, 8PSK, TN 0-1) | GSM | 9.55 | ± 9.6 % |
| 10027 | DAC | GPRS-FDD (TDMA, GMSK, TN 0-1-2) | GSM | 4.80 | ± 9.6 % |
| 10028 | DAC | GPRS-FDD (TDMA, GMSK, TN 0-1-2-3) | GSM | 3.55 | ± 9.6 % |
| 10029 | DAC | EDGE-FDD (TDMA, 8PSK, TN 0-1-2) | GSM | 7.78 | ± 9.6 % |
| 10030 | CAA | IEEE 802.15.1 Bluetooth (GFSK, DH1) | Bluetooth | 5.30 | ± 9.6 % |
| 10031 | CAA | IEEE 802.15.1 Bluetooth (GFSK, DH3) | Bluetooth | 1.87 | ± 9.6 % |
| 10032 | CAA | IEEE 802.15.1 Bluetooth (GFSK, DH5) | Bluetooth | 1.16 | ± 9.6 % |
| 10033 | CAA | IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH1) | Bluetooth | 7.74 | ± 9.6 % |
| 10034 | CAA | IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH3) | Bluetooth | 4.53 | ± 9.6 % |
| 10035 | CAA | IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH5) | Bluetooth | 3.83 | ± 9.6 % |
| 10036 | CAA | IEEE 802.15.1 Bluetooth (8-DPSK, DH1) | Bluetooth | 8.01 | ± 9.6 % |
| 10037 | CAA | IEEE 802.15.1 Bluetooth (8-DPSK, DH3) | Bluetooth | 4.77 | ± 9.6 % |
| 10038 | CAA | IEEE 802.15.1 Bluetooth (8-DPSK, DH5) | Bluetooth | 4.10 | ± 9.6 % |
| 10039 | CAB | CDMA2000 (1xRTT, RC1) | CDMA2000 | 4.57 | ± 9.6 % |
| 10042 | CAB | IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Halfrate) | AMPS | 7.78 | ± 9.6 % |
| 10044 | CAA | IS-91/EIA/TIA-553 FDD (FDMA, FM) | AMPS | 0.00 | ± 9.6 % |
| 10048 | CAA | DECT (TDD, TDMA/FDM, GFSK, Full Slot, 24) | DECT | 13.80 | ± 9.6 % |
| 10049 | CAA | DECT (TDD, TDMA/FDM, GFSK, Double Slot, 12) | DECT | 10.79 | ± 9.6 % |
| 10056 | CAA | UMTS-TDD (TD-SCDMA, 1.28 Mcps) | TD-SCDMA | 11.01 | ± 9.6 % |
| 10058 | DAC | EDGE-FDD (TDMA, 8PSK, TN 0-1-2-3) | GSM | 6.52 | ± 9.6 % |
| 10059 | CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps) | WLAN | 2.12 | ± 9.6 % |
| 10060 | CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps) | WLAN | 2.83 | ± 9.6 % |
| 10061 | CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps) | WLAN | 3.60 | ± 9.6 % |
| 10062 | CAD | IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps) | WLAN | 8.68 | ± 9.6 % |
| 10063 | CAD | IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps) | WLAN | 8.63 | ± 9.6 % |
| 10064 | CAD | IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps) | WLAN | 9.09 | ± 9.6 % |
| 10065 | CAD | IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps) | WLAN | 9.00 | ± 9.6 % |
| 10066 | CAD | IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps) | WLAN | 9.38 | ± 9.6 % |
| 10067 | CAD | IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps) | WLAN | 10.12 | ± 9.6 % |
| 10068 | CAD | IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps) | WLAN | 10.24 | ± 9.6 % |
| 10069 | CAD | IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps) | WLAN | 10.56 | ± 9.6 % |
| 10071 | CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 9 Mbps) | WLAN | 9.83 | ± 9.6 % |
| 10072 | CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 12 Mbps) | WLAN | 9.62 | ± 9.6 % |
| 10073 | CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 18 Mbps) | WLAN | 9.94 | ± 9.6 % |
| 10074 | CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 24 Mbps) | WLAN | 10.30 | ± 9.6 % |
| 10075 | CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 36 Mbps) | WLAN | 10.77 | ± 9.6 % |
| 10076 | CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 48 Mbps) | WLAN | 10.94 | ± 9.6 % |
| 10077 | CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps) | WLAN | 11.00 | ± 9.6 % |
| 10081 | CAB | CDMA2000 (1xRTT, RC3) | CDMA2000 | 3.97 | ± 9.6 % |
| 10082 | CAB | IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Fullrate) | AMPS | 4.77 | ± 9.6 % |
| 10090 | DAC | GPRS-FDD (TDMA, GMSK, TN 0-4) | GSM | 6.56 | ± 9.6 % |
| 10097 | CAC | UMTS-FDD (HSDPA) | WCDMA | 3.98 | ± 9.6 % |
| 10098 | DAC | UMTS-FDD (HSUPA, Subtest 2) | WCDMA | 3.98 | ± 9.6 % |

Certificate No: EX3-3753_Jul21

Page 10 of 22



EX3DV4-SN:3753

July 26, 2021

| | | | | | |
|-------|-----|--|---------|-------|---------|
| 10099 | CAC | EDGE-FDD (TDMA, 8PSK, TN 0-4) | GSM | 9.55 | ± 9.6 % |
| 10100 | CAC | LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK) | LTE-FDD | 5.67 | ± 9.6 % |
| 10101 | CAB | LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM) | LTE-FDD | 6.42 | ± 9.6 % |
| 10102 | CAB | LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM) | LTE-FDD | 6.60 | ± 9.6 % |
| 10103 | DAC | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK) | LTE-TDD | 9.29 | ± 9.6 % |
| 10104 | CAE | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM) | LTE-TDD | 9.97 | ± 9.6 % |
| 10105 | CAE | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM) | LTE-TDD | 10.01 | ± 9.6 % |
| 10108 | CAE | LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK) | LTE-FDD | 5.80 | ± 9.6 % |
| 10109 | CAG | LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM) | LTE-FDD | 6.43 | ± 9.6 % |
| 10110 | CAG | LTE-FDD (SC-FDMA, 100% RB, 5 MHz, QPSK) | LTE-FDD | 5.75 | ± 9.6 % |
| 10111 | CAG | LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM) | LTE-FDD | 6.44 | ± 9.6 % |
| 10112 | CAG | LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM) | LTE-FDD | 6.59 | ± 9.6 % |
| 10113 | CAG | LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM) | LTE-FDD | 6.62 | ± 9.6 % |
| 10114 | CAG | IEEE 802.11n (HT Greenfield, 13.5 Mbps, BPSK) | WLAN | 8.10 | ± 9.6 % |
| 10115 | CAG | IEEE 802.11n (HT Greenfield, 81 Mbps, 16-QAM) | WLAN | 8.46 | ± 9.6 % |
| 10116 | CAG | IEEE 802.11n (HT Greenfield, 135 Mbps, 64-QAM) | WLAN | 8.15 | ± 9.6 % |
| 10117 | CAG | IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK) | WLAN | 8.07 | ± 9.6 % |
| 10118 | CAD | IEEE 802.11n (HT Mixed, 81 Mbps, 16-QAM) | WLAN | 8.59 | ± 9.6 % |
| 10119 | CAD | IEEE 802.11n (HT Mixed, 135 Mbps, 64-QAM) | WLAN | 8.13 | ± 9.6 % |
| 10140 | CAD | LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM) | LTE-FDD | 6.49 | ± 9.6 % |
| 10141 | CAD | LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM) | LTE-FDD | 6.53 | ± 9.6 % |
| 10142 | CAD | LTE-FDD (SC-FDMA, 100% RB, 3 MHz, QPSK) | LTE-FDD | 5.73 | ± 9.6 % |
| 10143 | CAD | LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM) | LTE-FDD | 6.35 | ± 9.6 % |
| 10144 | CAC | LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM) | LTE-FDD | 6.65 | ± 9.6 % |
| 10145 | CAC | LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK) | LTE-FDD | 5.76 | ± 9.6 % |
| 10146 | CAC | LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM) | LTE-FDD | 6.41 | ± 9.6 % |
| 10147 | CAC | LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM) | LTE-FDD | 6.72 | ± 9.6 % |
| 10149 | CAE | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM) | LTE-FDD | 6.42 | ± 9.6 % |
| 10150 | CAE | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM) | LTE-FDD | 6.60 | ± 9.6 % |
| 10151 | CAE | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK) | LTE-TDD | 9.28 | ± 9.6 % |
| 10152 | CAE | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM) | LTE-TDD | 9.92 | ± 9.6 % |
| 10153 | CAE | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM) | LTE-TDD | 10.05 | ± 9.6 % |
| 10154 | CAF | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK) | LTE-FDD | 5.75 | ± 9.6 % |
| 10155 | CAF | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM) | LTE-FDD | 6.43 | ± 9.6 % |
| 10156 | CAF | LTE-FDD (SC-FDMA, 50% RB, 5 MHz, QPSK) | LTE-FDD | 5.79 | ± 9.6 % |
| 10157 | CAE | LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM) | LTE-FDD | 6.49 | ± 9.6 % |
| 10158 | CAE | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM) | LTE-FDD | 6.62 | ± 9.6 % |
| 10159 | CAG | LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM) | LTE-FDD | 6.56 | ± 9.6 % |
| 10160 | CAG | LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK) | LTE-FDD | 5.82 | ± 9.6 % |
| 10161 | CAG | LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM) | LTE-FDD | 6.43 | ± 9.6 % |
| 10162 | CAG | LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM) | LTE-FDD | 6.58 | ± 9.6 % |
| 10166 | CAG | LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK) | LTE-FDD | 5.46 | ± 9.6 % |
| 10167 | CAG | LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM) | LTE-FDD | 6.21 | ± 9.6 % |
| 10168 | CAG | LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM) | LTE-FDD | 6.79 | ± 9.6 % |
| 10169 | CAG | LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK) | LTE-FDD | 5.73 | ± 9.6 % |
| 10170 | CAG | LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM) | LTE-FDD | 6.52 | ± 9.6 % |
| 10171 | CAE | LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM) | LTE-FDD | 6.49 | ± 9.6 % |
| 10172 | CAE | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK) | LTE-TDD | 9.21 | ± 9.6 % |
| 10173 | CAE | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM) | LTE-TDD | 9.48 | ± 9.6 % |
| 10174 | CAF | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM) | LTE-TDD | 10.25 | ± 9.6 % |
| 10175 | CAF | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK) | LTE-FDD | 5.72 | ± 9.6 % |
| 10176 | CAF | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM) | LTE-FDD | 6.52 | ± 9.6 % |
| 10177 | CAE | LTE-FDD (SC-FDMA, 1 RB, 5 MHz, QPSK) | LTE-FDD | 5.73 | ± 9.6 % |
| 10178 | CAE | LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM) | LTE-FDD | 6.52 | ± 9.6 % |
| 10179 | AAE | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM) | LTE-FDD | 6.50 | ± 9.6 % |
| 10180 | CAG | LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM) | LTE-FDD | 6.50 | ± 9.6 % |

Certificate No: EX3-3753_Jul21

Page 11 of 22



EX3DV4- SN:3753

July 26, 2021

| | | | | | |
|-------|-----|---|---------|-------|---------|
| 10181 | CAG | LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK) | LTE-FDD | 5.72 | ± 9.6 % |
| 10182 | CAG | LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM) | LTE-FDD | 6.52 | ± 9.6 % |
| 10183 | CAG | LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM) | LTE-FDD | 6.50 | ± 9.6 % |
| 10184 | CAG | LTE-FDD (SC-FDMA, 1 RB, 3 MHz, QPSK) | LTE-FDD | 5.73 | ± 9.6 % |
| 10185 | CAI | LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM) | LTE-FDD | 6.51 | ± 9.6 % |
| 10186 | CAG | LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM) | LTE-FDD | 6.50 | ± 9.6 % |
| 10187 | CAG | LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK) | LTE-FDD | 5.73 | ± 9.6 % |
| 10188 | CAG | LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM) | LTE-FDD | 6.52 | ± 9.6 % |
| 10189 | CAE | LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM) | LTE-FDD | 6.50 | ± 9.6 % |
| 10193 | CAE | IEEE 802.11n (HT Greenfield, 6.5 Mbps, BPSK) | WLAN | 8.09 | ± 9.6 % |
| 10194 | AAD | IEEE 802.11n (HT Greenfield, 39 Mbps, 16-QAM) | WLAN | 8.12 | ± 9.6 % |
| 10195 | CAE | IEEE 802.11n (HT Greenfield, 65 Mbps, 64-QAM) | WLAN | 8.21 | ± 9.6 % |
| 10196 | CAE | IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK) | WLAN | 8.10 | ± 9.6 % |
| 10197 | AAE | IEEE 802.11n (HT Mixed, 39 Mbps, 16-QAM) | WLAN | 8.13 | ± 9.6 % |
| 10198 | CAF | IEEE 802.11n (HT Mixed, 65 Mbps, 64-QAM) | WLAN | 8.27 | ± 9.6 % |
| 10219 | CAF | IEEE 802.11n (HT Mixed, 7.2 Mbps, BPSK) | WLAN | 8.03 | ± 9.6 % |
| 10220 | AAF | IEEE 802.11n (HT Mixed, 43.3 Mbps, 16-QAM) | WLAN | 8.13 | ± 9.6 % |
| 10221 | CAC | IEEE 802.11n (HT Mixed, 72.2 Mbps, 64-QAM) | WLAN | 8.27 | ± 9.6 % |
| 10222 | CAC | IEEE 802.11n (HT Mixed, 15 Mbps, BPSK) | WLAN | 8.06 | ± 9.6 % |
| 10223 | CAD | IEEE 802.11n (HT Mixed, 90 Mbps, 16-QAM) | WLAN | 8.48 | ± 9.6 % |
| 10224 | CAD | IEEE 802.11n (HT Mixed, 150 Mbps, 64-QAM) | WLAN | 8.08 | ± 9.6 % |
| 10225 | CAD | UMTS-FDD (HSPA+) | WCDMA | 5.97 | ± 9.6 % |
| 10226 | CAD | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM) | LTE-TDD | 9.49 | ± 9.6 % |
| 10227 | CAD | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM) | LTE-TDD | 10.26 | ± 9.6 % |
| 10228 | CAD | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK) | LTE-TDD | 9.22 | ± 9.6 % |
| 10229 | DAC | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM) | LTE-TDD | 9.48 | ± 9.6 % |
| 10230 | CAC | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM) | LTE-TDD | 10.25 | ± 9.6 % |
| 10231 | CAC | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK) | LTE-TDD | 9.19 | ± 9.6 % |
| 10232 | CAD | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM) | LTE-TDD | 9.48 | ± 9.6 % |
| 10233 | CAD | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM) | LTE-TDD | 10.25 | ± 9.6 % |
| 10234 | CAD | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK) | LTE-TDD | 9.21 | ± 9.6 % |
| 10235 | CAD | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM) | LTE-TDD | 9.48 | ± 9.6 % |
| 10236 | CAD | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM) | LTE-TDD | 10.25 | ± 9.6 % |
| 10237 | CAD | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK) | LTE-TDD | 9.21 | ± 9.6 % |
| 10238 | CAB | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM) | LTE-TDD | 9.48 | ± 9.6 % |
| 10239 | CAB | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM) | LTE-TDD | 10.25 | ± 9.6 % |
| 10240 | CAB | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK) | LTE-TDD | 9.21 | ± 9.6 % |
| 10241 | CAB | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM) | LTE-TDD | 9.82 | ± 9.6 % |
| 10242 | CAD | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM) | LTE-TDD | 9.86 | ± 9.6 % |
| 10243 | CAD | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK) | LTE-TDD | 9.46 | ± 9.6 % |
| 10244 | CAD | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM) | LTE-TDD | 10.06 | ± 9.6 % |
| 10245 | CAG | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM) | LTE-TDD | 10.06 | ± 9.6 % |
| 10246 | CAG | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK) | LTE-TDD | 9.30 | ± 9.6 % |
| 10247 | CAG | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM) | LTE-TDD | 9.91 | ± 9.6 % |
| 10248 | CAG | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM) | LTE-TDD | 10.09 | ± 9.6 % |
| 10249 | CAG | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK) | LTE-TDD | 9.29 | ± 9.6 % |
| 10250 | CAG | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM) | LTE-TDD | 9.81 | ± 9.6 % |
| 10251 | CAF | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM) | LTE-TDD | 10.17 | ± 9.6 % |
| 10252 | CAF | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK) | LTE-TDD | 9.24 | ± 9.6 % |
| 10253 | CAF | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM) | LTE-TDD | 9.90 | ± 9.6 % |
| 10254 | CAB | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM) | LTE-TDD | 10.14 | ± 9.6 % |
| 10255 | CAB | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK) | LTE-TDD | 9.20 | ± 9.6 % |
| 10256 | CAB | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM) | LTE-TDD | 9.96 | ± 9.6 % |
| 10257 | CAD | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM) | LTE-TDD | 10.08 | ± 9.6 % |
| 10258 | CAD | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK) | LTE-TDD | 9.34 | ± 9.6 % |
| 10259 | CAD | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM) | LTE-TDD | 9.98 | ± 9.6 % |

Certificate No: EX3-3753_Jul21

Page 12 of 22



EX3DV4-SN:3753

July 26, 2021

| | | | | | |
|-------|-----|---|----------|-------|---------|
| 10260 | CAG | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM) | LTE-TDD | 9.97 | ± 9.6 % |
| 10261 | CAG | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK) | LTE-TDD | 9.24 | ± 9.6 % |
| 10262 | CAG | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM) | LTE-TDD | 9.83 | ± 9.6 % |
| 10263 | CAG | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM) | LTE-TDD | 10.16 | ± 9.6 % |
| 10264 | CAG | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK) | LTE-TDD | 9.23 | ± 9.6 % |
| 10265 | CAG | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM) | LTE-TDD | 9.92 | ± 9.6 % |
| 10266 | CAF | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM) | LTE-TDD | 10.07 | ± 9.6 % |
| 10267 | CAF | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK) | LTE-TDD | 9.30 | ± 9.6 % |
| 10268 | CAF | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM) | LTE-TDD | 10.06 | ± 9.6 % |
| 10269 | CAB | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM) | LTE-TDD | 10.13 | ± 9.6 % |
| 10270 | CAB | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK) | LTE-TDD | 9.58 | ± 9.6 % |
| 10274 | CAB | UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.10) | WCDMA | 4.87 | ± 9.6 % |
| 10275 | CAD | UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.4) | WCDMA | 3.96 | ± 9.6 % |
| 10277 | CAD | PHS (QPSK) | PHS | 11.81 | ± 9.6 % |
| 10278 | CAD | PHS (QPSK, BW 884MHz, Rolloff 0.5) | PHS | 11.81 | ± 9.6 % |
| 10279 | CAG | PHS (QPSK, BW 884MHz, Rolloff 0.38) | PHS | 12.18 | ± 9.6 % |
| 10290 | CAG | CDMA2000, RC1, SO55, Full Rate | CDMA2000 | 3.91 | ± 9.6 % |
| 10291 | CAG | CDMA2000, RC3, SO55, Full Rate | CDMA2000 | 3.46 | ± 9.6 % |
| 10292 | CAG | CDMA2000, RC3, SO32, Full Rate | CDMA2000 | 3.39 | ± 9.6 % |
| 10293 | CAG | CDMA2000, RC3, SO3, Full Rate | CDMA2000 | 3.50 | ± 9.6 % |
| 10295 | CAG | CDMA2000, RC1, SO3, 1/8th Rate 25 fr. | CDMA2000 | 12.49 | ± 9.6 % |
| 10297 | CAF | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK) | LTE-FDD | 5.81 | ± 9.6 % |
| 10298 | CAF | LTE-FDD (SC-FDMA, 50% RB, 3 MHz, QPSK) | LTE-FDD | 5.72 | ± 9.6 % |
| 10299 | CAF | LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM) | LTE-FDD | 6.39 | ± 9.6 % |
| 10300 | CAC | LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM) | LTE-FDD | 6.60 | ± 9.6 % |
| 10301 | CAC | IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, QPSK, PUSC) | WiMAX | 12.03 | ± 9.6 % |
| 10302 | CAB | IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, QPSK, PUSC, 3CTRL) | WiMAX | 12.57 | ± 9.6 % |
| 10303 | CAB | IEEE 802.16e WiMAX (31:15, 5ms, 10MHz, 64QAM, PUSC) | WiMAX | 12.52 | ± 9.6 % |
| 10304 | CAA | IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, 64QAM, PUSC) | WiMAX | 11.86 | ± 9.6 % |
| 10305 | CAA | IEEE 802.16e WiMAX (31:15, 10ms, 10MHz, 64QAM, PUSC) | WiMAX | 15.24 | ± 9.6 % |
| 10306 | CAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 64QAM, PUSC) | WiMAX | 14.67 | ± 9.6 % |
| 10307 | AAB | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, QPSK, PUSC) | WiMAX | 14.49 | ± 9.6 % |
| 10308 | AAB | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 16QAM, PUSC) | WiMAX | 14.46 | ± 9.6 % |
| 10309 | AAB | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 16QAM, AMC 2x3) | WiMAX | 14.58 | ± 9.6 % |
| 10310 | AAB | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, QPSK, AMC 2x3) | WiMAX | 14.57 | ± 9.6 % |
| 10311 | AAB | LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK) | LTE-FDD | 6.06 | ± 9.6 % |
| 10313 | AAD | iDEN 1:3 | iDEN | 10.51 | ± 9.6 % |
| 10314 | AAD | iDEN 1:6 | iDEN | 13.48 | ± 9.6 % |
| 10315 | AAD | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 96pc dc) | WLAN | 1.71 | ± 9.6 % |
| 10316 | AAD | IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 96pc dc) | WLAN | 8.36 | ± 9.6 % |
| 10317 | AAA | IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc dc) | WLAN | 8.36 | ± 9.6 % |
| 10352 | AAA | Pulse Waveform (200Hz, 10%) | Generic | 10.00 | ± 9.6 % |
| 10353 | AAA | Pulse Waveform (200Hz, 20%) | Generic | 6.99 | ± 9.6 % |
| 10354 | AAA | Pulse Waveform (200Hz, 40%) | Generic | 3.98 | ± 9.6 % |
| 10355 | AAA | Pulse Waveform (200Hz, 60%) | Generic | 2.22 | ± 9.6 % |
| 10356 | AAA | Pulse Waveform (200Hz, 80%) | Generic | 0.97 | ± 9.6 % |
| 10387 | AAA | QPSK Waveform, 1 MHz | Generic | 5.10 | ± 9.6 % |
| 10388 | AAA | QPSK Waveform, 10 MHz | Generic | 5.22 | ± 9.6 % |
| 10396 | AAA | 64-QAM Waveform, 100 kHz | Generic | 6.27 | ± 9.6 % |
| 10399 | AAA | 64-QAM Waveform, 40 MHz | Generic | 6.27 | ± 9.6 % |
| 10400 | AAD | IEEE 802.11ac WiFi (20MHz, 64-QAM, 99pc dc) | WLAN | 8.37 | ± 9.6 % |
| 10401 | AAA | IEEE 802.11ac WiFi (40MHz, 64-QAM, 99pc dc) | WLAN | 8.60 | ± 9.6 % |
| 10402 | AAA | IEEE 802.11ac WiFi (80MHz, 64-QAM, 99pc dc) | WLAN | 8.53 | ± 9.6 % |
| 10403 | AAB | CDMA2000 (1xEV-DO, Rev. 0) | CDMA2000 | 3.76 | ± 9.6 % |
| 10404 | AAB | CDMA2000 (1xEV-DO, Rev. A) | CDMA2000 | 3.77 | ± 9.6 % |
| 10406 | AAD | CDMA2000, RC3, SO32, SCH0, Full Rate | CDMA2000 | 5.22 | ± 9.6 % |

Certificate No: EX3-3753_Jul21

Page 13 of 22



EX3DV4- SN:3753

July 26, 2021

| | | | | | |
|-------|-----|--|----------|-------|---------|
| 10410 | AAA | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Sub=2,3,4,7,8,9) | LTE-TDD | 7.82 | ± 9.6 % |
| 10414 | AAA | WLAN CCDF, 64-QAM, 40MHz | Generic | 8.54 | ± 9.6 % |
| 10415 | AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc dc) | WLAN | 1.54 | ± 9.6 % |
| 10416 | AAA | IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 99pc dc) | WLAN | 8.23 | ± 9.6 % |
| 10417 | AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 99pc dc) | WLAN | 8.23 | ± 9.6 % |
| 10418 | AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc, Long) | WLAN | 8.14 | ± 9.6 % |
| 10419 | AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc, Short) | WLAN | 8.19 | ± 9.6 % |
| 10422 | AAA | IEEE 802.11n (HT Greenfield, 7.2 Mbps, BPSK) | WLAN | 8.32 | ± 9.6 % |
| 10423 | AAA | IEEE 802.11n (HT Greenfield, 43.3 Mbps, 16-QAM) | WLAN | 8.47 | ± 9.6 % |
| 10424 | AAE | IEEE 802.11n (HT Greenfield, 72.2 Mbps, 64-QAM) | WLAN | 8.40 | ± 9.6 % |
| 10425 | AAE | IEEE 802.11n (HT Greenfield, 15 Mbps, BPSK) | WLAN | 8.41 | ± 9.6 % |
| 10426 | AAE | IEEE 802.11n (HT Greenfield, 90 Mbps, 16-QAM) | WLAN | 8.45 | ± 9.6 % |
| 10427 | AAB | IEEE 802.11n (HT Greenfield, 150 Mbps, 64-QAM) | WLAN | 8.41 | ± 9.6 % |
| 10430 | AAB | LTE-FDD (OFDMA, 5 MHz, E-TM 3.1) | LTE-FDD | 8.28 | ± 9.6 % |
| 10431 | AAC | LTE-FDD (OFDMA, 10 MHz, E-TM 3.1) | LTE-FDD | 8.38 | ± 9.6 % |
| 10432 | AAB | LTE-FDD (OFDMA, 15 MHz, E-TM 3.1) | LTE-FDD | 8.34 | ± 9.6 % |
| 10433 | AAC | LTE-FDD (OFDMA, 20 MHz, E-TM 3.1) | LTE-FDD | 8.34 | ± 9.6 % |
| 10434 | AAG | W-CDMA (BS Test Model 1, 64 DPCH) | WCDMA | 8.60 | ± 9.6 % |
| 10435 | AAA | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Sub) | LTE-TDD | 7.82 | ± 9.6 % |
| 10447 | AAA | LTE-FDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%) | LTE-FDD | 7.56 | ± 9.6 % |
| 10448 | AAA | LTE-FDD (OFDMA, 10 MHz, E-TM 3.1, Clipping 44%) | LTE-FDD | 7.53 | ± 9.6 % |
| 10449 | AAC | LTE-FDD (OFDMA, 15 MHz, E-TM 3.1, Clipping 44%) | LTE-FDD | 7.51 | ± 9.6 % |
| 10450 | AAA | LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%) | LTE-FDD | 7.48 | ± 9.6 % |
| 10451 | AAA | W-CDMA (BS Test Model 1, 64 DPCH, Clipping 44%) | WCDMA | 7.59 | ± 9.6 % |
| 10453 | AAC | Validation (Square, 10ms, 1ms) | Test | 10.00 | ± 9.6 % |
| 10456 | AAC | IEEE 802.11ac WiFi (160MHz, 64-QAM, 99pc dc) | WLAN | 8.63 | ± 9.6 % |
| 10457 | AAC | UMTS-FDD (DC-HSDPA) | WCDMA | 6.62 | ± 9.6 % |
| 10458 | AAC | CDMA2000 (1xEV-DO, Rev. B, 2 carriers) | CDMA2000 | 6.55 | ± 9.6 % |
| 10459 | AAC | CDMA2000 (1xEV-DO, Rev. B, 3 carriers) | CDMA2000 | 8.25 | ± 9.6 % |
| 10460 | AAC | UMTS-FDD (WCDMA, AMR) | WCDMA | 2.39 | ± 9.6 % |
| 10461 | AAC | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK, UL Sub) | LTE-TDD | 7.82 | ± 9.6 % |
| 10462 | AAC | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM, UL Sub) | LTE-TDD | 8.30 | ± 9.6 % |
| 10463 | AAD | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM, UL Sub) | LTE-TDD | 8.56 | ± 9.6 % |
| 10464 | AAD | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK, UL Sub) | LTE-TDD | 7.82 | ± 9.6 % |
| 10465 | AAC | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM, UL Sub) | LTE-TDD | 8.32 | ± 9.6 % |
| 10466 | AAC | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM, UL Sub) | LTE-TDD | 8.57 | ± 9.6 % |
| 10467 | AAA | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Sub) | LTE-TDD | 7.82 | ± 9.6 % |
| 10468 | AAF | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM, UL Sub) | LTE-TDD | 8.32 | ± 9.6 % |
| 10469 | AAD | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM, UL Sub) | LTE-TDD | 8.56 | ± 9.6 % |
| 10470 | AAD | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Sub) | LTE-TDD | 7.82 | ± 9.6 % |
| 10471 | AAC | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM, UL Sub) | LTE-TDD | 8.32 | ± 9.6 % |
| 10472 | AAC | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM, UL Sub) | LTE-TDD | 8.57 | ± 9.6 % |
| 10473 | AAA | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK, UL Sub) | LTE-TDD | 7.82 | ± 9.6 % |
| 10474 | AAC | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM, UL Sub) | LTE-TDD | 8.32 | ± 9.6 % |
| 10475 | AAD | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM, UL Sub) | LTE-TDD | 8.57 | ± 9.6 % |
| 10477 | AAC | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM, UL Sub) | LTE-TDD | 8.32 | ± 9.6 % |
| 10478 | AAC | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM, UL Sub) | LTE-TDD | 8.57 | ± 9.6 % |
| 10479 | AAC | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK, UL Sub) | LTE-TDD | 7.74 | ± 9.6 % |
| 10480 | AAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM, UL Sub) | LTE-TDD | 8.18 | ± 9.6 % |
| 10481 | AAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM, UL Sub) | LTE-TDD | 8.45 | ± 9.6 % |
| 10482 | AAA | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK, UL Sub) | LTE-TDD | 7.71 | ± 9.6 % |
| 10483 | AAA | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM, Sub) | LTE-TDD | 8.39 | ± 9.6 % |
| 10484 | AAB | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM, UL Sub) | LTE-TDD | 8.47 | ± 9.6 % |
| 10485 | AAB | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK, UL Sub) | LTE-TDD | 7.59 | ± 9.6 % |
| 10486 | AAB | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM, UL Sub) | LTE-TDD | 8.38 | ± 9.6 % |
| 10487 | AAC | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM, UL Sub) | LTE-TDD | 8.60 | ± 9.6 % |

Certificate No: EX3-3753_Jul21

Page 14 of 22



EX3DV4-SN:3753

July 26, 2021

| | | | | | |
|-------|-----|---|---------|------|---------|
| 10488 | AAC | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK, UL Sub) | LTE-TDD | 7.70 | ± 9.6 % |
| 10489 | AAC | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM, UL Sub) | LTE-TDD | 8.31 | ± 9.6 % |
| 10490 | AAF | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM, UL Sub) | LTE-TDD | 8.54 | ± 9.6 % |
| 10491 | AAF | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK, UL Sub) | LTE-TDD | 7.74 | ± 9.6 % |
| 10492 | AAF | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM, UL Sub) | LTE-TDD | 8.41 | ± 9.6 % |
| 10493 | AAF | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM, UL Sub) | LTE-TDD | 8.55 | ± 9.6 % |
| 10494 | AAF | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK, UL Sub) | LTE-TDD | 7.74 | ± 9.6 % |
| 10495 | AAF | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM, UL Sub) | LTE-TDD | 8.37 | ± 9.6 % |
| 10496 | AAE | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM, UL Sub) | LTE-TDD | 8.54 | ± 9.6 % |
| 10497 | AAE | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK, UL Sub) | LTE-TDD | 7.67 | ± 9.6 % |
| 10498 | AAE | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM, UL Sub) | LTE-TDD | 8.40 | ± 9.6 % |
| 10499 | AAC | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM, UL Sub) | LTE-TDD | 8.68 | ± 9.6 % |
| 10500 | AAF | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK, UL Sub) | LTE-TDD | 7.67 | ± 9.6 % |
| 10501 | AAF | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM, UL Sub) | LTE-TDD | 8.44 | ± 9.6 % |
| 10502 | AAB | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM, UL Sub) | LTE-TDD | 8.52 | ± 9.6 % |
| 10503 | AAB | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK, UL Sub) | LTE-TDD | 7.72 | ± 9.6 % |
| 10504 | AAB | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM, UL Sub) | LTE-TDD | 8.31 | ± 9.6 % |
| 10505 | AAC | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM, UL Sub) | LTE-TDD | 8.54 | ± 9.6 % |
| 10506 | AAC | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK, UL Sub) | LTE-TDD | 7.74 | ± 9.6 % |
| 10507 | AAC | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM, UL Sub) | LTE-TDD | 8.36 | ± 9.6 % |
| 10508 | AAF | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM, UL Sub) | LTE-TDD | 8.55 | ± 9.6 % |
| 10509 | AAF | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK, UL Sub) | LTE-TDD | 7.99 | ± 9.6 % |
| 10510 | AAF | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM, UL Sub) | LTE-TDD | 8.49 | ± 9.6 % |
| 10511 | AAF | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM, UL Sub) | LTE-TDD | 8.51 | ± 9.6 % |
| 10512 | AAF | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK, UL Sub) | LTE-TDD | 7.74 | ± 9.6 % |
| 10513 | AAF | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM, UL Sub) | LTE-TDD | 8.42 | ± 9.6 % |
| 10514 | AAE | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM, UL Sub) | LTE-TDD | 8.45 | ± 9.6 % |
| 10515 | AAE | IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 99pc dc) | WLAN | 1.58 | ± 9.6 % |
| 10516 | AAE | IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 99pc dc) | WLAN | 1.57 | ± 9.6 % |
| 10517 | AAF | IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 99pc dc) | WLAN | 1.58 | ± 9.6 % |
| 10518 | AAF | IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 99pc dc) | WLAN | 8.23 | ± 9.6 % |
| 10519 | AAF | IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 99pc dc) | WLAN | 8.39 | ± 9.6 % |
| 10520 | AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 99pc dc) | WLAN | 8.12 | ± 9.6 % |
| 10521 | AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 99pc dc) | WLAN | 7.97 | ± 9.6 % |
| 10522 | AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 99pc dc) | WLAN | 8.45 | ± 9.6 % |
| 10523 | AAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 99pc dc) | WLAN | 8.08 | ± 9.6 % |
| 10524 | AAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 99pc dc) | WLAN | 8.27 | ± 9.6 % |
| 10525 | AAC | IEEE 802.11ac WiFi (20MHz, MCS0, 99pc dc) | WLAN | 8.36 | ± 9.6 % |
| 10526 | AAF | IEEE 802.11ac WiFi (20MHz, MCS1, 99pc dc) | WLAN | 8.42 | ± 9.6 % |
| 10527 | AAF | IEEE 802.11ac WiFi (20MHz, MCS2, 99pc dc) | WLAN | 8.21 | ± 9.6 % |
| 10528 | AAF | IEEE 802.11ac WiFi (20MHz, MCS3, 99pc dc) | WLAN | 8.36 | ± 9.6 % |
| 10529 | AAF | IEEE 802.11ac WiFi (20MHz, MCS4, 99pc dc) | WLAN | 8.36 | ± 9.6 % |
| 10531 | AAF | IEEE 802.11ac WiFi (20MHz, MCS6, 99pc dc) | WLAN | 8.43 | ± 9.6 % |
| 10532 | AAF | IEEE 802.11ac WiFi (20MHz, MCS7, 99pc dc) | WLAN | 8.29 | ± 9.6 % |
| 10533 | AAE | IEEE 802.11ac WiFi (20MHz, MCS8, 99pc dc) | WLAN | 8.38 | ± 9.6 % |
| 10534 | AAE | IEEE 802.11ac WiFi (40MHz, MCS0, 99pc dc) | WLAN | 8.45 | ± 9.6 % |
| 10535 | AAE | IEEE 802.11ac WiFi (40MHz, MCS1, 99pc dc) | WLAN | 8.45 | ± 9.6 % |
| 10536 | AAF | IEEE 802.11ac WiFi (40MHz, MCS2, 99pc dc) | WLAN | 8.32 | ± 9.6 % |
| 10537 | AAF | IEEE 802.11ac WiFi (40MHz, MCS3, 99pc dc) | WLAN | 8.44 | ± 9.6 % |
| 10538 | AAF | IEEE 802.11ac WiFi (40MHz, MCS4, 99pc dc) | WLAN | 8.54 | ± 9.6 % |
| 10540 | AAA | IEEE 802.11ac WiFi (40MHz, MCS6, 99pc dc) | WLAN | 8.39 | ± 9.6 % |
| 10541 | AAA | IEEE 802.11ac WiFi (40MHz, MCS7, 99pc dc) | WLAN | 8.46 | ± 9.6 % |
| 10542 | AAA | IEEE 802.11ac WiFi (40MHz, MCS8, 99pc dc) | WLAN | 8.65 | ± 9.6 % |
| 10543 | AAC | IEEE 802.11ac WiFi (40MHz, MCS9, 99pc dc) | WLAN | 8.65 | ± 9.6 % |
| 10544 | AAC | IEEE 802.11ac WiFi (80MHz, MCS0, 99pc dc) | WLAN | 8.47 | ± 9.6 % |
| 10545 | AAC | IEEE 802.11ac WiFi (80MHz, MCS1, 99pc dc) | WLAN | 8.55 | ± 9.6 % |



EX3DV4- SN:3753

July 26, 2021

| | | | | | |
|-------|-----|---|------|------|---------|
| 10546 | AAC | IEEE 802.11ac WiFi (80MHz, MCS2, 99pc dc) | WLAN | 8.35 | ± 9.6 % |
| 10547 | AAC | IEEE 802.11ac WiFi (80MHz, MCS3, 99pc dc) | WLAN | 8.49 | ± 9.6 % |
| 10548 | AAC | IEEE 802.11ac WiFi (80MHz, MCS4, 99pc dc) | WLAN | 8.37 | ± 9.6 % |
| 10550 | AAC | IEEE 802.11ac WiFi (80MHz, MCS6, 99pc dc) | WLAN | 8.38 | ± 9.6 % |
| 10551 | AAC | IEEE 802.11ac WiFi (80MHz, MCS7, 99pc dc) | WLAN | 8.50 | ± 9.6 % |
| 10552 | AAC | IEEE 802.11ac WiFi (80MHz, MCS8, 99pc dc) | WLAN | 8.42 | ± 9.6 % |
| 10553 | AAC | IEEE 802.11ac WiFi (80MHz, MCS9, 99pc dc) | WLAN | 8.45 | ± 9.6 % |
| 10554 | AAC | IEEE 802.11ac WiFi (160MHz, MCS0, 99pc dc) | WLAN | 8.48 | ± 9.6 % |
| 10555 | AAC | IEEE 802.11ac WiFi (160MHz, MCS1, 99pc dc) | WLAN | 8.47 | ± 9.6 % |
| 10556 | AAC | IEEE 802.11ac WiFi (160MHz, MCS2, 99pc dc) | WLAN | 8.50 | ± 9.6 % |
| 10557 | AAC | IEEE 802.11ac WiFi (160MHz, MCS3, 99pc dc) | WLAN | 8.52 | ± 9.6 % |
| 10558 | AAC | IEEE 802.11ac WiFi (160MHz, MCS4, 99pc dc) | WLAN | 8.61 | ± 9.6 % |
| 10560 | AAC | IEEE 802.11ac WiFi (160MHz, MCS6, 99pc dc) | WLAN | 8.73 | ± 9.6 % |
| 10561 | AAC | IEEE 802.11ac WiFi (160MHz, MCS7, 99pc dc) | WLAN | 8.56 | ± 9.6 % |
| 10562 | AAC | IEEE 802.11ac WiFi (160MHz, MCS8, 99pc dc) | WLAN | 8.69 | ± 9.6 % |
| 10563 | AAC | IEEE 802.11ac WiFi (160MHz, MCS9, 99pc dc) | WLAN | 8.77 | ± 9.6 % |
| 10564 | AAC | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 99pc dc) | WLAN | 8.25 | ± 9.6 % |
| 10565 | AAC | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 99pc dc) | WLAN | 8.45 | ± 9.6 % |
| 10566 | AAC | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 99pc dc) | WLAN | 8.13 | ± 9.6 % |
| 10567 | AAC | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 99pc dc) | WLAN | 8.00 | ± 9.6 % |
| 10568 | AAC | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 99pc dc) | WLAN | 8.37 | ± 9.6 % |
| 10569 | AAC | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 99pc dc) | WLAN | 8.10 | ± 9.6 % |
| 10570 | AAC | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps, 99pc dc) | WLAN | 8.30 | ± 9.6 % |
| 10571 | AAC | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 90pc dc) | WLAN | 1.99 | ± 9.6 % |
| 10572 | AAC | IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 90pc dc) | WLAN | 1.99 | ± 9.6 % |
| 10573 | AAC | IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 90pc dc) | WLAN | 1.98 | ± 9.6 % |
| 10574 | AAC | IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 90pc dc) | WLAN | 1.98 | ± 9.6 % |
| 10575 | AAC | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 90pc dc) | WLAN | 8.59 | ± 9.6 % |
| 10576 | AAC | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 90pc dc) | WLAN | 8.60 | ± 9.6 % |
| 10577 | AAC | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 90pc dc) | WLAN | 8.70 | ± 9.6 % |
| 10578 | AAD | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 90pc dc) | WLAN | 8.49 | ± 9.6 % |
| 10579 | AAD | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 90pc dc) | WLAN | 8.36 | ± 9.6 % |
| 10580 | AAD | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 90pc dc) | WLAN | 8.76 | ± 9.6 % |
| 10581 | AAD | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 90pc dc) | WLAN | 8.35 | ± 9.6 % |
| 10582 | AAD | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps, 90pc dc) | WLAN | 8.67 | ± 9.6 % |
| 10583 | AAD | IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 90pc dc) | WLAN | 8.59 | ± 9.6 % |
| 10584 | AAD | IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 90pc dc) | WLAN | 8.60 | ± 9.6 % |
| 10585 | AAD | IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 90pc dc) | WLAN | 8.70 | ± 9.6 % |
| 10586 | AAD | IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 90pc dc) | WLAN | 8.49 | ± 9.6 % |
| 10587 | AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 90pc dc) | WLAN | 8.36 | ± 9.6 % |
| 10588 | AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 90pc dc) | WLAN | 8.76 | ± 9.6 % |
| 10589 | AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 90pc dc) | WLAN | 8.35 | ± 9.6 % |
| 10590 | AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 90pc dc) | WLAN | 8.67 | ± 9.6 % |
| 10591 | AAA | IEEE 802.11n (HT Mixed, 20MHz, MCS0, 90pc dc) | WLAN | 8.63 | ± 9.6 % |
| 10592 | AAA | IEEE 802.11n (HT Mixed, 20MHz, MCS1, 90pc dc) | WLAN | 8.79 | ± 9.6 % |
| 10593 | AAA | IEEE 802.11n (HT Mixed, 20MHz, MCS2, 90pc dc) | WLAN | 8.64 | ± 9.6 % |
| 10594 | AAA | IEEE 802.11n (HT Mixed, 20MHz, MCS3, 90pc dc) | WLAN | 8.74 | ± 9.6 % |
| 10595 | AAA | IEEE 802.11n (HT Mixed, 20MHz, MCS4, 90pc dc) | WLAN | 8.74 | ± 9.6 % |
| 10596 | AAA | IEEE 802.11n (HT Mixed, 20MHz, MCS5, 90pc dc) | WLAN | 8.71 | ± 9.6 % |
| 10597 | AAA | IEEE 802.11n (HT Mixed, 20MHz, MCS6, 90pc dc) | WLAN | 8.72 | ± 9.6 % |
| 10598 | AAA | IEEE 802.11n (HT Mixed, 20MHz, MCS7, 90pc dc) | WLAN | 8.50 | ± 9.6 % |
| 10599 | AAA | IEEE 802.11n (HT Mixed, 40MHz, MCS0, 90pc dc) | WLAN | 8.79 | ± 9.6 % |
| 10600 | AAA | IEEE 802.11n (HT Mixed, 40MHz, MCS1, 90pc dc) | WLAN | 8.88 | ± 9.6 % |
| 10601 | AAA | IEEE 802.11n (HT Mixed, 40MHz, MCS2, 90pc dc) | WLAN | 8.82 | ± 9.6 % |
| 10602 | AAA | IEEE 802.11n (HT Mixed, 40MHz, MCS3, 90pc dc) | WLAN | 8.94 | ± 9.6 % |
| 10603 | AAA | IEEE 802.11n (HT Mixed, 40MHz, MCS4, 90pc dc) | WLAN | 9.03 | ± 9.6 % |

Certificate No: EX3-3753_Jul21

Page 16 of 22