



BUREAU  
VERITAS

Test Report No.: RF160816W001-4



Test Lab  
Cert 2951.01

# FCC TEST REPORT (PART 24)

**Product:** smartphone  
**Model Name:** Ilium L1300  
**FCC ID:** ZC4L1300  
**Applicant:** Corporativo Lanix S.A. de C.V.  
**Address:** Carretera Internacional Hermosillo-Nogales Km 8.5, Hermosillo  
Sonora, Mexico  
**Manufacturer:** Tinno Mobile Technology Corp.  
**Address:** 4/F., H-3 Building, OCT Eastern Industrial Park. NO.1 XiangShan  
East Road., Nan Shan District, Shenzhen, P.R.China.  
**Prepared by:** Bureau Veritas Shenzhen Co., Ltd. Dongguan Branch  
**Lab Location:** No. 34, Chenwulu Section, Guantai Rd., Houjie Town, Dongguan  
City, Guangdong 523942, China  
**TEL:** +86 769 8593 5656  
**FAX:** +86 769 8593 1080  
**E-MAIL:** [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)  
**Report No.:** RF160816W001-4  
**Received Date:** Aug. 16, 2016  
**Test Date:** Aug. 17, 2016 ~ Aug. 31, 2016  
**Issued Date:** Sep. 01, 2016

This report should not be used by the client to claim product certification, approval, or endorsement by A2LA or any government agencies.

This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,  
Houjie Town, Dongguan City,  
Guangdong 523942, China

Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)



## TABLE OF CONTENTS

<b>RELEASE CONTROL RECORD .....</b>	<b>4</b>
<b>1 CERTIFICATION .....</b>	<b>5</b>
<b>2 SUMMARY OF TEST RESULTS.....</b>	<b>6</b>
2.1 MEASUREMENT UNCERTAINTY .....	6
2.2 TEST SITE AND INSTRUMENTS.....	7
<b>3 GENERAL INFORMATION.....</b>	<b>8</b>
3.1 GENERAL DESCRIPTION OF EUT .....	8
3.2 CONFIGURATION OF SYSTEM UNDER TEST .....	9
3.3 DESCRIPTION OF SUPPORT UNITS.....	11
3.4 TEST ITEM AND TEST CONFIGURATION .....	11
3.5 EUT OPERATING CONDITIONS.....	15
3.6 GENERAL DESCRIPTION OF APPLIED STANDARDS .....	15
<b>4 TEST TYPES AND RESULTS.....</b>	<b>16</b>
4.1 OUTPUT POWER MEASUREMENT .....	16
4.1.1 LIMITS OF OUTPUT POWER MEASUREMENT .....	16
4.1.2 TEST PROCEDURES .....	16
4.1.3 TEST SETUP.....	17
4.1.4 TEST RESULTS .....	18
4.2 FREQUENCY STABILITY MEASUREMENT .....	27
4.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT .....	27
4.2.2 TEST PROCEDURE.....	27
4.2.3 TEST SETUP.....	27
4.2.4 TEST RESULTS .....	28
4.3 OCCUPIED BANDWIDTH MEASUREMENT .....	30
4.3.1 TEST PROCEDURES .....	30
4.3.2 TEST SETUP.....	30
4.3.3 TEST RESULTS .....	31
4.4 BAND EDGE MEASUREMENT .....	39
4.4.1 LIMITS OF BAND EDGE MEASUREMENT .....	39
4.4.2 TEST SETUP.....	39
4.4.3 TEST PROCEDURES .....	39
4.4.4 TEST RESULTS .....	41
4.5 CONDUCTED SPURIOUS EMISSIONS .....	48
4.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT .....	48
4.5.2 TEST PROCEDURE.....	48
4.5.3 TEST SETUP.....	48
4.5.4 TEST RESULTS .....	49
4.6 RADIATED EMISSION MEASUREMENT.....	54
4.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT .....	54
4.6.2 TEST PROCEDURES .....	54
4.6.3 DEVIATION FROM TEST STANDARD .....	54
4.6.4 TEST SETUP.....	55
4.6.5 TEST RESULTS .....	56



**BUREAU**  
**VERITAS**

**Test Report No.: RF160816W001-4**

4.7	PEAK TO AVERAGE RATIO .....	66
4.7.1	LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT.....	76
4.7.2	TEST SETUP.....	76
4.7.3	TEST PROCEDURES .....	76
4.7.4	TEST RESULTS .....	77
5	INFORMATION ON THE TESTING LABORATORIES.....	83
6	APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB .....	84



Test Report No.: RF160816W001-4

## RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF160816W001-4	Original release	Sep. 01, 2016



## 1 CERTIFICATION

**PRODUCT:** smartphone  
**BRAND NAME:** LANIX  
**MODEL NAME:** Ilium L1300  
**APPLICANT:** Corporativo Lanix S.A. de C.V.  
**TESTED:** Aug. 17, 2016 ~ Aug. 31, 2016  
**TEST SAMPLE:** Identical Prototype  
**STANDARDS:** FCC Part 24, Subpart E

The above equipment has been tested by **Bureau Veritas Shenzhen Co., Ltd. Dongguan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**PREPARED BY :** Yuqiang Yin , **DATE:** Sep. 01, 2016  
( Yuqiang Yin / Engineer)

**APPROVED BY :** Bill Yao , **DATE:** Sep. 01, 2016  
( Bill Yao / Manager)

## 2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 24 & Part 2			
STANDARD SECTION	TEST TYPE	RESULT	REMARK
2.1046 24.232	Equivalent Isotropic Radiated Power	PASS	Meet the requirement of limit.
2.1055 24.235	Frequency Stability	PASS	Meet the requirement of limit.
2.1049 24.238(b)	Occupied Bandwidth	PASS	Meet the requirement of limit.
24.232(d)	Peak to average ratio	PASS	Meet the requirement of limit.
24.238(b)	Band Edge Measurements	PASS	Meet the requirement of limit.
2.1051 24.238	Conducted Spurious Emissions	PASS	Meet the requirement of limit.
2.1053 24.238	Radiated Spurious Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -8.94dB at 5636.00MHz.

### 2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.66dB
Radiated emissions	9KHz ~ 30MHz	2.74dB
	30MHz ~ 1GHz	3.55dB
	1GHz ~ 18GHz	4.84dB
	18GHz ~ 40GHz	1.94dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



### 2.2 TEST SITE AND INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR7	101494	Apr. 05,16	Apr. 04,17
10dB Attenuator	JFW/USA	50HF-010-SMA	1505	Jul. 27, 16	Jul. 26, 17
Signal and Spectrum Analyzer	Rohde&Schwarz	FSV7	102331	Nov. 09,15	Nov. 08,16
Bilog Antenna 1	Teseq	CBL 6111D	30643	Jul. 14, 16	Jul. 13, 17
Bilog Antenna 2	Teseq	CBL 6111D	27089	Jul. 14, 16	Jul. 13, 17
Horn Antenna (1GHz -18GHz)	ETS -Lindgren	3117	00062558	May 18,16	May 17,17
GPS Generator+ Antenna	TOJOIN	GNSS-5000A	E1-010119	Aug. 02, 15	Aug. 01, 17
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	NSEMC003	Mar. 12,16	Mar. 11,18
Test Software	ADT	ADT_Radiated_V7.6.15.9.2	N/A	N/A	N/A
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170242	Mar. 12,16	Mar. 11,17
Amplifier (9kHz-1GHz)	SONOMA	310D	186955	Mar. 04,16	Mar. 03, 17
Pre-Amplifier(1-18G)	HP	8449B	3008A00409	Apr. 25,16	Apr. 24,17
Pre-Amplifier (18GHz-40GHz)	EMCI	EMC 184045	980102	Nov. 20,15	Nov. 19,16
Test Software	ADT	ADT_Radiated_V7.6.15.9.2	N/A	N/A	N/A
BLUETOOTH TESTER	Rohde&Schwarz	CBT32	100811	Aug. 29,16	Aug. 28,17
Power Sensor	Keysight	U2021XA	MY55060016	May 04,16	May 03,17
Power Sensor	Keysight	U2021XA	MY55060018	May 04,16	May 03,17
Digital Multimeter	FLUKE	15B	A1220010DG	Oct. 12, 15	Oct.11, 16
Humid & Temp Programmable Tester	Haida	HD-2257	110807201	Sep.07,15	Sep. 06,16
Oscilloscope	Agilent	DSO9254A	MY51260160	Nov. 28,15	Nov. 27,16
Signal Analyzer	Rohde & Schwarz	FSV7	102331	Nov. 09,15	Nov. 08,16
Signal Generator	Agilent	N5183A	MY50140980	Nov. 09,15	Nov. 08,16
ESG Vector Signal Generator	Agilent	E4438C	MY49072505	Apr. 22, 16	Apr. 21, 17
BLUETOOTH TESTER	Rohde&Schwarz	CBT32	100811	Aug. 29,16	Aug. 28,17

- NOTE:**
1. The calibration interval of the above test instruments is 12 months or 24 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
  2. The test was performed in Dongguan 966 Chamber.
  3. The horn antenna are used only for the measurement of emission frequency above 1GHz if tested.
  4. The FCC Site Registration No. is 502831.



### 3 GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

<b>PRODUCT</b>	smartphone	
<b>BRAND NAME</b>	LANIX	
<b>MODEL NAME</b>	Ilium L1300	
<b>POWER SUPPLY</b>	5.0Vdc (adapter or host equipment) 3.85Vdc (Li-ion, battery)	
<b>MODULATION TYPE</b>	<b>GSM, GPRS:</b> GMSK <b>EDGE:</b> GMSK, 8PSK <b>WCDMA :</b> BPSK <b>LTE Band 2:</b> QPSK, 16QAM	
<b>FREQUENCY RANGE</b>	<b>GSM, GPRS, EDGE:</b> 1850.2MHz ~ 1909.8MHz	
	<b>WCDMA:</b> 1852.4MHz ~ 1907.6MHz	
	<b>LTE Band 2 Channel Bandwidth: 1.4MHz</b>	1850.7MHz ~ 1909.3MHz
	<b>LTE Band 2 Channel Bandwidth: 3MHz</b>	1851.5MHz ~ 1908.5MHz
	<b>LTE Band 2 Channel Bandwidth: 5MHz</b>	1852.5MHz ~ 1907.5MHz
	<b>LTE Band 2 Channel Bandwidth: 10MHz</b>	1855.0MHz ~ 1905.0MHz
	<b>LTE Band 2 Channel Bandwidth: 15MHz</b>	1857.5MHz ~ 1902.5MHz
	<b>LTE Band 2 Channel Bandwidth: 20MHz</b>	1860.0MHz ~ 1900.0MHz
<b>MAX. EIRP POWER</b>	<b>GSM</b>	653mW
	<b>EDGE</b>	222mW
	<b>WCDMA</b>	205mW
	<b>LTE Band 2 Channel Bandwidth: 1.4MHz</b>	410mW
	<b>LTE Band 2 Channel Bandwidth: 3MHz</b>	405mW
	<b>LTE Band 2 Channel Bandwidth: 5MHz</b>	409mW
	<b>LTE Band 2 Channel Bandwidth: 10MHz</b>	415mW
	<b>LTE Band 2 Channel Bandwidth: 15MHz</b>	408mW
<b>LTE Band 2 Channel Bandwidth: 20MHz</b>	368mW	
<b>EMISSION DESIGNATOR</b>	<b>GSM</b>	246KGXW





	<b>EDGE</b>	242KG7W
	<b>WCDMA</b>	4M15F9W
	<b>LTE Band 2 Channel Bandwidth: 1.4MHz</b>	QPSK: 1M09G7D 16QAM: 1M08W7D
	<b>LTE Band 2 Channel Bandwidth: 3MHz</b>	QPSK: 2M69G7D 16QAM: 2M68W7D
	<b>LTE Band 2 Channel Bandwidth: 5MHz</b>	QPSK: 4M48G7D 16QAM: 4M46W7D
	<b>LTE Band 2 Channel Bandwidth: 10MHz</b>	QPSK: 8M92G7D 16QAM: 8M92W7D
	<b>LTE Band 2 Channel Bandwidth: 15MHz</b>	QPSK: 13M4G7D 16QAM: 13M4W7D
	<b>LTE Band 2 Channel Bandwidth: 20MHz</b>	QPSK: 17M9G7D 16QAM: 17M8W7D
	<b>ANTENNA TYPE</b>	Fixed Internal antenna with 0dBi gain
<b>HW VERSION</b>	V1.0	
<b>SW VERSION</b>	Ilium L1300_TELCEL_SW_01	
<b>I/O PORTS</b>	Refer to user's manual	
<b>CABLE SUPPLIED</b>	USB cable: non-shielded, detachable, 0.8m Earphone cable: non-shielded, detachable, 1.5m	

**NOTE:**

- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
- The EUT was powered by the following adapter:

<b>ADAPTER</b>	
<b>BRAND:</b>	LANIX
<b>MODEL:</b>	Ilium L1300-C
<b>INPUT:</b>	AC 100-240V, 500mA
<b>OUTPUT:</b>	DC 5V, 3000mA DC 9V, 2000mA DC 12V, 1500mA

- The EUT matched the following USB cable and Earphone:

<b>USB CABLE</b>	
<b>BRAND:</b>	LANIX
<b>MODEL:</b>	Ilium L1300
<b>SIGNAL LINE:</b>	0.8 METER


<b>EARPHONE</b>	
<b>BRAND:</b>	LANIX
<b>MODEL:</b>	Ilium L1300
<b>SIGNAL LINE:</b>	1.5 METER

- For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.




### 3.2 CONFIGURATION OF SYSTEM UNDER TEST

#### FOR RADIATION EMISSION TEST

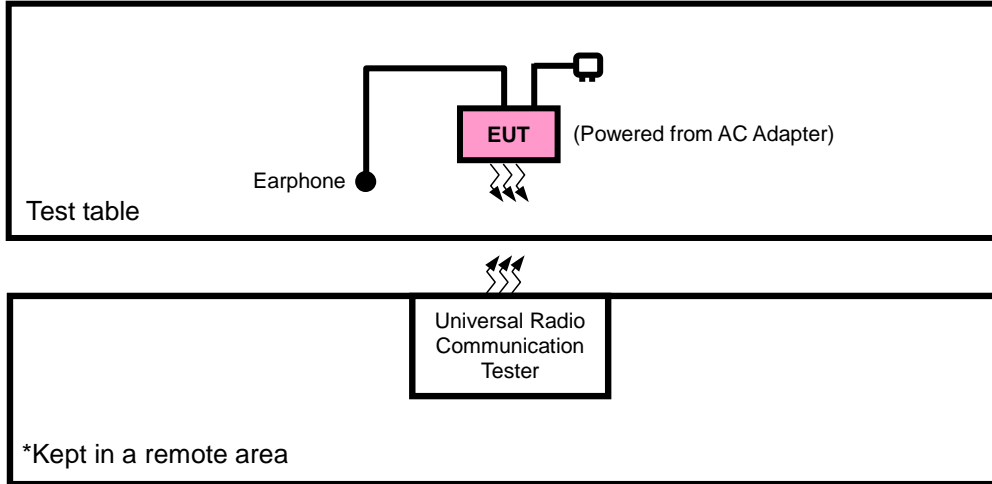

#### FOR E.I.R.P. TEST

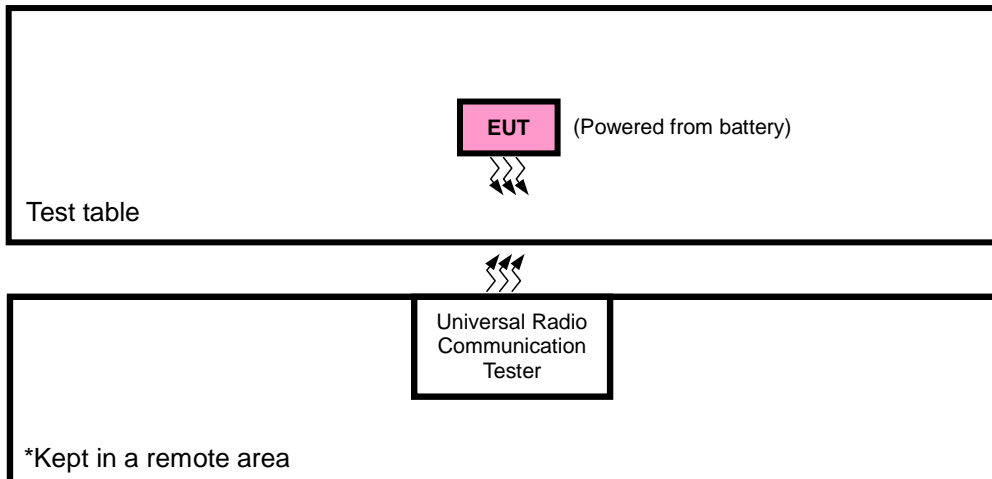



### 3.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	DC source	LONG WEI	PS-6403D	010934269	N/A
2	PC	HP	A6608CN	3CR83825X3	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	DC Line: Unshielded, Detachable 1.0m
2	AC Line: Unshielded, Detachable 1.5m

**NOTE:**

- All power cords of the above support units are non shielded (1.8m).

### 3.4 TEST ITEM AND TEST CONFIGURATION

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports

The worst case in EIRP and radiated emission was found when positioned on X-plane for GSM/EDGE/WCDMA and Z-plane for LTE. Following channel(s) was (were) selected for the final test as listed below:

EUT CONFIGURE MODE	DESCRIPTION
A	EUT + Adapter + USB Cable + Earphone with GSM ,WCDMA or LTE link
B	EUT + Battery+ USB Cable + Earphone with GSM ,WCDMA or LTE link

#### GSM MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	MODE
B	EIRP	512 to 810	512, 661, 810	GSM, EDGE
B	FREQUENCY STABILITY	512 to 810	661	GSM, EDGE
B	OCCUPIED BANDWIDTH	512 to 810	512, 661, 810	GSM, EDGE
B	PEAK TO AVERAGE RATIO	512 to 810	661	GSM, EDGE
B	BAND EDGE	512 to 810	512, 810	GSM, EDGE
B	CONDCUDED EMISSION	512 to 810	661	GSM, EDGE
A	RADIATED EMISSION	512 to 810	661	GSM, EDGE



**WCDMA MODE**

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	MODE
B	EIRP	9262 to 9538	9262, 9400, 9538	WCDMA
B	FREQUENCY STABILITY	9262 to 9538	9400	WCDMA
B	OCCUPIED BANDWIDTH	9262 to 9538	9262, 9400, 9538	WCDMA
B	PEAK TO AVERAGE RATIO	9262 to 9538	9400	WCDMA
B	BAND EDGE	9262 to 9538	9262, 9538	WCDMA
B	CONDCUETED EMISSION	9262 to 9538	9400	WCDMA
A	RADIATED EMISSION	9262 to 9538	9400	WCDMA

**LTE BAND 2**

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE
B	EIRP	18607 to 19193	18607, 18900, 19193	1.4MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18615 to 19185	18615, 18900, 19185	3MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18625 to 19175	18625, 18900, 19175	5MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18650 to 19150	18650, 18900, 19150	10MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18675 to 19125	18675, 18900, 19125	15MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20MHz	QPSK,16QAM	1 RB / 0 RB Offset
B	FREQUENCY STABILITY	18607 to 19193	18900	1.4MHz	QPSK	1 RB / 0 RB Offset
		18615 to 19185	18900	3MHz	QPSK	1 RB / 0 RB Offset
		18625 to 19175	18900	5MHz	QPSK	1 RB / 0 RB Offset
		18650 to 19150	18900	10MHz	QPSK	1 RB / 0 RB Offset
		18675 to 19125	18900	15MHz	QPSK	1 RB / 0 RB Offset
		18700 to 19100	18900	20MHz	QPSK	1 RB / 0 RB Offset
B	OCCUPIED BANDWIDTH	18607 to 19193	18607, 18900, 19193	1.4MHz	QPSK,16QAM	6 RB / 0 RB Offset
		18615 to 19185	18615, 18900, 19185	3MHz	QPSK,16QAM	15 RB / 0 RB Offset
		18625 to 19175	18625, 18900, 19175	5MHz	QPSK,16QAM	25 RB / 0 RB Offset
		18650 to 19150	18650, 18900, 19150	10MHz	QPSK,16QAM	50 RB / 0 RB Offset
		18675 to 19125	18675, 18900, 19125	15MHz	QPSK,16QAM	75 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20MHz	QPSK,16QAM	100 RB / 0 RB Offset
B	PEAK TO AVERAGE RATIO	18607 to 19193	18607, 18900, 19193	1.4MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18615 to 19185	18615, 18900, 19185	3MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18625 to 19175	18625, 18900, 19175	5MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18650 to 19150	18650, 18900, 19150	10MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18675 to 19125	18675, 18900, 19125	15MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20MHz	QPSK,16QAM	1 RB / 0 RB Offset



**BUREAU  
VERITAS**

**Test Report No.: RF160816W001-4**

B	BAND EDGE	18607 to 19193	18607	1.4MHz	QPSK	1 RB / 0 RB Offset
						6 RB / 0 RB Offset
		18615 to 19185	19193	1.4MHz	QPSK	1 RB / 5 RB Offset
						6 RB / 0 RB Offset
		18625 to 19175	18615	3MHz	QPSK	1 RB / 0 RB Offset
						15 RB / 0 RB Offset
		18650 to 19150	19185	3MHz	QPSK	1 RB / 14 RB Offset
						15 RB / 0 RB Offset
		18675 to 19125	18625	5MHz	QPSK	1 RB / 0 RB Offset
						25 RB / 0 RB Offset
		18700 to 19100	19175	5MHz	QPSK	1 RB / 24 RB Offset
						25 RB / 0 RB Offset
		18607 to 19193	18650	10MHz	QPSK	1 RB / 0 RB Offset
						50 RB / 0 RB Offset
		18615 to 19185	19150	10MHz	QPSK	1 RB / 49 RB Offset
						50 RB / 0 RB Offset
18625 to 19175	18675	15MHz	QPSK	1 RB / 0 RB Offset		
				75 RB / 0 RB Offset		
18650 to 19150	19125	15MHz	QPSK	1 RB / 74 RB Offset		
				75 RB / 0 RB Offset		
18675 to 19125	18700	20MHz	QPSK	1 RB / 0 RB Offset		
				100 RB / 0 RB Offset		
18700 to 19100	19100	20MHz	QPSK	1 RB / 99 RB Offset		
				100 RB / 0 RB Offset		
B	CONDCUDETED EMISSION	18607 to 19193	18900	1.4MHz	QPSK	1 RB / 0 RB Offset
		18615 to 19185	18900	3MHz	QPSK	1 RB / 0 RB Offset
		18625 to 19175	18900	5MHz	QPSK	1 RB / 0 RB Offset
		18650 to 19150	18900	10MHz	QPSK	1 RB / 0 RB Offset
		18675 to 19125	18900	15MHz	QPSK	1 RB / 0 RB Offset
		18700 to 19100	18900	20MHz	QPSK	1 RB / 0 RB Offset
A	RADIATED EMISSION	18607 to 19193	18900	1.4MHz	QPSK	1 RB / 0 RB Offset
		18615 to 19185	18900	3MHz	QPSK	1 RB / 0 RB Offset
		18625 to 19175	18900	5MHz	QPSK	1 RB / 0 RB Offset
		18650 to 19150	18900	10MHz	QPSK	1 RB / 0 RB Offset
		18675 to 19125	18900	15MHz	QPSK	1 RB / 0 RB Offset
		18700 to 19100	18900	20MHz	QPSK	1 RB / 0 RB Offset



**TEST CONDITION:**

TEST ITEM	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
EIRP	25deg. C, 57%RH	5Vdc from adapter	Alex Chen
FREQUENCY STABILITY	23deg. C, 61%RH	3.85Vdc from Battery	Yuqiang Yin
OCCUPIED BANDWIDTH	23deg. C, 61%RH	3.85Vdc from Battery	Yuqiang Yin
PEAK TO AVERAGE RATIO	23deg. C, 61%RH	3.85Vdc from Battery	Yuqiang Yin
BAND EDGE	23deg. C, 61%RH	3.85Vdc from Battery	Yuqiang Yin
CONDCUDED EMISSION	23deg. C, 61%RH	3.85Vdc from Battery	Yuqiang Yin
RADIATED EMISSION	25deg. C, 57%RH	5Vdc from adapter	Alex Chen



### 3.5 EUT OPERATING CONDITIONS

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

### 3.6 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC 47 CFR Part 2**

**FCC 47 CFR Part 24**

**KDB 971168 D01 Power Meas License Digital Systems v02r02**

**ANSI/TIA/EIA-603-D**

**NOTE:** All test items have been performed and recorded as per the above standards.

## 4 TEST TYPES AND RESULTS

### 4.1 OUTPUT POWER MEASUREMENT

#### 4.1.1 LIMITS OF OUTPUT POWER MEASUREMENT

Mobile and portable stations are limited to 2 watts EIRP.

#### 4.1.2 TEST PROCEDURES

##### EIRP MEASUREMENT:

- a. All measurements were done at low, middle and high operational frequency range. RBW and VBW is 1MHz for GSM, GPRS & EDGE and 5MHz for WCDMA mode.
- b. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- c. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a tx cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value " of step b. Record the power level of S.G
- d.  $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn.}$


##### CONDUCTED POWER MEASUREMENT:

The EUT was set up for the maximum power with GSM, GPRS, EDGE & WCDMA link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.




### 4.1.3 TEST SETUP

#### EIRP MEASUREMENT:

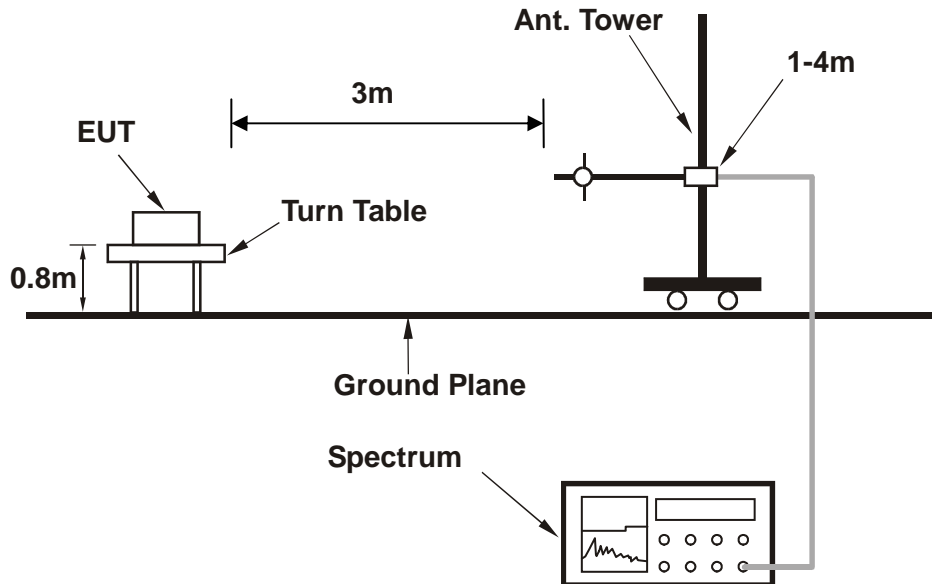

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### CONDUCTED POWER MEASUREMENT:

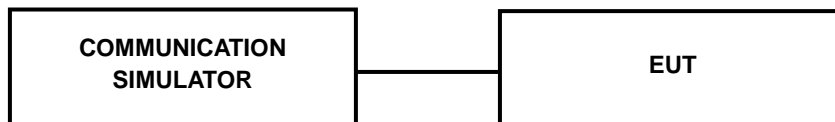

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.4 TEST RESULTS

##### CONDUCTED OUTPUT POWER (dBm)

Band	GSM1900		
Channel	512	661	810
Frequency (MHz)	1850.2	1880.0	1909.8
GSM	29.18	29.12	29.25
GPRS 8	29.17	29.10	29.24
GPRS 10	28.07	28.04	28.15
GPRS 11	25.74	25.77	26.15
GPRS 12	23.59	23.80	23.76
EDGE 8 (MCS9)	25.40	25.48	25.49
EDGE 10 (MCS9)	23.79	23.92	23.93
EDGE 11 (MCS9)	21.56	21.62	21.70
EDGE 12 (MCS9)	19.42	19.50	19.52

Band	WCDMA II		
Channel	9262	9400	9538
Frequency (MHz)	1852.4	1880.0	1907.6
RMC 12.2K	23.38	23.56	23.46
HSPA			
HSDPA Subtest-1	22.43	22.56	22.51
HSDPA Subtest-2	22.40	22.58	22.48
HSDPA Subtest-3	21.87	22.00	21.95
HSDPA Subtest-4	21.78	21.96	21.86
HSUPA Subtest-1	22.09	22.22	22.17
HSUPA Subtest-2	20.34	20.52	20.42
HSUPA Subtest-3	21.16	21.29	21.24
HSUPA Subtest-4	20.45	20.63	20.53
HSUPA Subtest-5	22.39	22.57	22.41



LTE Band 2							
BW	Modulation	RB Size	RB Offset	Low CH 18607	Mid CH 18900	High CH 19193	3GPP MPR (dB)
				Frequency 1850.7 MHz	Frequency 1880 MHz	Frequency 1909.3 MHz	
1.4MHz	QPSK	1	0	22.48	22.37	22.29	0
		1	2	22.33	22.22	22.14	0
		1	5	22.30	22.19	22.11	0
		3	0	22.47	22.36	22.28	0
		3	1	22.32	22.21	22.13	0
		3	3	22.29	22.18	22.10	0
		6	0	21.68	21.57	21.49	1
	16QAM	1	0	21.53	21.42	21.34	1
		1	2	21.48	21.37	21.29	1
		1	5	21.45	21.34	21.26	1
		3	0	21.51	21.40	21.32	1
		3	1	21.46	21.35	21.27	1
		3	3	21.43	21.32	21.24	1
		6	0	20.55	20.44	20.36	2
BW	Modulation	RB Size	RB Offset	Low CH 18615	Mid CH 18900	High CH 19185	3GPP MPR (dB)
				Frequency 1851.5 MHz	Frequency 1880 MHz	Frequency 1908.5 MHz	
3 MHz	QPSK	1	0	22.51	22.40	22.32	0
		1	7	22.36	22.25	22.17	0
		1	14	22.33	22.22	22.14	0
		8	0	21.67	21.56	21.48	1
		8	3	21.65	21.54	21.46	1
		8	7	21.55	21.44	21.36	1
		15	0	21.71	21.60	21.52	1
	16QAM	1	0	21.56	21.45	21.37	1
		1	7	21.51	21.40	21.32	1
		1	14	21.48	21.37	21.29	1
		8	0	20.49	20.38	20.30	2
		8	3	20.61	20.50	20.42	2
		8	7	20.54	20.43	20.35	2
		15	0	20.58	20.47	20.39	2



LTE Band 2							
BW	Modulation	RB Size	RB Offset	Low CH 18625	Mid CH 18900	High CH 19175	3GPP MPR (dB)
				Frequency 1852.5 MHz	Frequency 1880 MHz	Frequency 1907.5 MHz	
5 MHz	QPSK	1	0	22.54	22.43	22.35	0
		1	12	22.39	22.28	22.20	0
		1	24	22.36	22.25	22.17	0
		12	0	21.70	21.59	21.51	1
		12	6	21.68	21.57	21.49	1
		12	13	21.58	21.47	21.39	1
		25	0	21.74	21.63	21.55	1
	16QAM	1	0	21.59	21.48	21.40	1
		1	12	21.54	21.43	21.35	1
		1	24	21.51	21.40	21.32	1
		12	0	20.52	20.41	20.33	2
		12	6	20.64	20.53	20.45	2
		12	13	20.57	20.46	20.38	2
		25	0	20.61	20.50	20.42	2
BW	Modulation	RB Size	RB Offset	Low CH 18650	Mid CH 18900	High CH 19150	3GPP MPR (dB)
				Frequency 1855 MHz	Frequency 1880 MHz	Frequency 1905 MHz	
10 MHz	QPSK	1	0	22.56	22.45	22.37	0
		1	24	22.41	22.30	22.22	0
		1	49	22.38	22.27	22.19	0
		25	0	21.72	21.61	21.53	1
		25	12	21.70	21.59	21.51	1
		25	25	21.60	21.49	21.41	1
		50	0	21.76	21.65	21.57	1
	16QAM	1	0	21.61	21.50	21.42	1
		1	24	21.56	21.45	21.37	1
		1	49	21.53	21.42	21.34	1
		25	0	20.54	20.43	20.35	2
		25	12	20.66	20.55	20.47	2
		25	25	20.59	20.48	20.40	2
		50	0	20.63	20.52	20.44	2



LTE Band 2							
BW	Modulation	RB Size	RB Offset	Low CH 18675	Mid CH 18900	High CH 19125	3GPP MPR (dB)
				Frequency 1857.5 MHz	Frequency 1880 MHz	Frequency 1902.5 MHz	
15 MHz	QPSK	1	0	22.59	22.48	22.40	0
		1	37	22.44	22.33	22.25	0
		1	74	22.41	22.30	22.22	0
		36	0	21.75	21.64	21.56	1
		36	19	21.73	21.62	21.54	1
		36	39	21.63	21.52	21.44	1
		75	0	21.79	21.68	21.60	1
	16QAM	1	0	21.64	21.53	21.45	1
		1	37	21.59	21.48	21.40	1
		1	74	21.56	21.45	21.37	1
		36	0	20.57	20.46	20.38	2
		36	19	20.69	20.58	20.50	2
		36	39	20.62	20.51	20.43	2
		75	0	20.66	20.55	20.47	2
BW	Modulation	RB Size	RB Offset	Low CH 18700	Mid CH 18900	High CH 19100	3GPP MPR (dB)
				Frequency 1860 MHz	Frequency 1880 MHz	Frequency 1900 MHz	
20MHz	QPSK	1	0	<b>22.64</b>	22.53	22.45	0
		1	50	22.49	22.38	22.30	0
		1	99	22.46	22.35	22.27	0
		50	0	21.80	21.69	21.61	1
		50	25	21.78	21.67	21.59	1
		50	50	21.68	21.57	21.49	1
		100	0	21.84	21.73	21.65	1
	16QAM	1	0	21.69	21.58	21.50	1
		1	50	21.64	21.53	21.45	1
		1	99	21.61	21.50	21.42	1
		50	0	20.62	20.51	20.43	2
		50	25	20.74	20.63	20.55	2
		50	50	20.67	20.56	20.48	2
		100	0	20.71	20.60	20.52	2



EIRP POWER (dBm)

GSM

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)
512	1850.2	-18.93	43.83	24.90	309.03	H
661	1880.0	-18.72	43.57	24.85	305.49	H
810	1909.8	-19.59	44.57	24.98	314.77	H
512	1850.2	-18.89	46.39	27.50	562.34	V
661	1880.0	-18.95	47.10	28.15	<b>652.83</b>	V
810	1909.8	-19.76	45.98	26.22	418.41	V

**REMARKS:** 1. EIRP Output Power (dBm) = SPA LVL (dBm) + Correction Factor (dB).  
2. Correction factor (dB) = Free Space Loss + Antenna Factor + Cable Loss

EDGE

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)
512	1850.2	-22.54	43.83	21.29	134.59	H
661	1880.0	-22.91	43.57	20.66	116.41	H
810	1909.8	-23.75	44.57	20.82	120.78	H
512	1850.2	-22.97	46.39	23.42	219.79	V
661	1880.0	-23.64	47.10	23.46	<b>221.72</b>	V
810	1909.8	-24.15	45.98	21.83	152.26	V

**REMARKS:** 1. EIRP Output Power (dBm) = SPA LVL (dBm) + Correction Factor (dB).  
2. Correction factor (dB) = Free Space Loss + Antenna Factor + Cable Loss

WCDMA

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)
9262	1852.4	-23.51	43.83	20.32	107.65	H
9400	1880.0	-23.43	43.57	20.14	103.28	H
9538	1907.6	-24.54	44.57	20.03	100.69	H
9262	1852.4	-23.27	46.39	23.12	<b>205.12</b>	V
9400	1880.0	-24.06	47.10	23.04	201.28	V
9538	1907.6	-24.81	45.98	21.17	130.80	V

**REMARKS:** 1. EIRP Output Power (dBm) = SPA LVL (dBm) + Correction Factor (dB).  
2. Correction factor (dB) = Free Space Loss + Antenna Factor + Cable Loss



LTE BAND 2

CHANNEL BANDWIDTH: 1.4MHz QPSK

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	LIMIT (W)
18607	1850.7	-21.81	43.83	22.02	159.37	H	2
18900	1880.0	-21.18	43.57	22.39	173.38	H	2
19193	1909.3	-21.66	44.32	22.66	184.46	H	2
18607	1850.7	-21.05	46.41	25.36	343.64	V	2
18900	1880.0	-20.94	47.07	26.13	<b>410.20</b>	V	2
19193	1909.3	-21.81	45.88	24.07	255.51	V	2

CHANNEL BANDWIDTH: 1.4MHz 16QAM

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	LIMIT (W)
18607	1850.7	-22.68	43.83	21.15	130.44	H	2
18900	1880.0	-22.11	43.57	21.46	139.96	H	2
19193	1909.3	-22.62	44.32	21.70	147.88	H	2
18607	1850.7	-21.92	46.41	24.49	281.25	V	2
18900	1880.0	-21.87	47.07	25.20	331.13	V	2
19193	1909.3	-22.77	45.88	23.11	204.83	V	2

CHANNEL BANDWIDTH: 3MHz QPSK

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	LIMIT (W)
18615	1851.5	-21.79	43.82	22.03	159.66	H	2
18900	1880.0	-21.24	43.57	22.33	171.00	H	2
19185	1908.5	-21.61	44.38	22.77	189.06	H	2
18615	1851.5	-21.03	46.45	25.42	348.42	V	2
18900	1880.0	-21.00	47.07	26.07	<b>404.58</b>	V	2
19185	1908.5	-21.76	45.88	24.12	258.23	V	2



CHANNEL BANDWIDTH: 3MHz 16QAM

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	LIMIT (W)
18615	1851.5	-22.86	43.82	20.96	124.80	H	2
18900	1880.0	-22.13	43.57	21.44	139.32	H	2
19185	1908.5	-22.60	44.38	21.78	150.52	H	2
18615	1851.5	-22.10	46.45	24.35	272.33	V	2
18900	1880.0	-21.89	47.07	25.18	329.61	V	2
19185	1908.5	-22.75	45.88	23.13	205.59	V	2

CHANNEL BANDWIDTH: 5MHz QPSK

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	LIMIT (W)
18625	1852.5	-21.85	43.83	21.98	157.69	H	2
18900	1880.0	-21.19	43.57	22.38	172.98	H	2
19175	1907.5	-21.56	44.19	22.63	183.15	H	2
18625	1852.5	-21.09	46.46	25.37	344.59	V	2
18900	1880.0	-20.95	47.07	26.12	<b>409.26</b>	V	2
19175	1907.5	-21.71	45.89	24.18	261.88	V	2

CHANNEL BANDWIDTH: 5MHz 16QAM

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	LIMIT (W)
18625	1852.5	-22.68	43.83	21.15	130.26	H	2
18900	1880.0	-22.21	43.57	21.36	136.77	H	2
19175	1907.5	-22.66	44.19	21.53	142.17	H	2
18625	1852.5	-21.92	46.46	24.54	284.64	V	2
18900	1880.0	-21.97	47.07	25.10	323.59	V	2
19175	1907.5	-22.81	45.89	23.08	203.28	V	2





CHANNEL BANDWIDTH: 10MHz QPSK

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	LIMIT (W)
18650	1855.0	-21.66	43.86	22.20	166.00	H	2
18900	1880.0	-21.13	43.57	22.44	175.39	H	2
19150	1905.0	-21.43	43.99	22.56	180.47	H	2
18650	1855.0	-20.90	46.28	25.38	344.98	V	2
18900	1880.0	-20.89	47.07	26.18	<b>414.95</b>	V	2
19150	1905.0	-21.58	45.92	24.34	271.77	V	2

CHANNEL BANDWIDTH: 10MHz 16QAM

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	LIMIT (W)
18650	1855.0	-22.81	43.86	21.05	127.38	H	2
18900	1880.0	-22.23	43.57	21.34	136.14	H	2
19150	1905.0	-22.59	43.99	21.40	138.17	H	2
18650	1855.0	-22.05	46.28	24.23	264.73	V	2
18900	1880.0	-21.99	47.07	25.08	322.11	V	2
19150	1905.0	-22.74	45.92	23.18	208.07	V	2

CHANNEL BANDWIDTH: 15MHz QPSK

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	LIMIT (W)
18675	1857.5	-21.67	43.99	22.32	170.69	H	2
18900	1880.0	-21.20	43.57	22.37	172.58	H	2
19125	1902.5	-21.50	43.66	22.16	164.25	H	2
18675	1857.5	-20.91	45.93	25.02	317.47	V	2
18900	1880.0	-20.96	47.07	26.11	<b>408.32</b>	V	2
19125	1902.5	-21.65	46.20	24.55	285.23	V	2



CHANNEL BANDWIDTH: 15MHz 16QAM

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	LIMIT (W)
18675	1857.5	-22.53	43.99	21.46	140.02	H	2
18900	1880.0	-22.07	43.57	21.50	141.25	H	2
19125	1902.5	-22.35	43.66	21.31	135.05	H	2
18675	1857.5	-21.77	45.93	24.16	260.44	V	2
18900	1880.0	-21.83	47.07	25.24	334.20	V	2
19125	1902.5	-22.50	46.20	23.70	234.53	V	2

CHANNEL BANDWIDTH: 20MHz QPSK

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	LIMIT (W)
18700	1860.0	-22.25	43.50	21.25	133.32	H	2
18900	1880.0	-21.65	43.57	21.92	155.60	H	2
19100	1900.0	-22.08	43.62	21.54	142.43	H	2
18700	1860.0	-21.49	45.57	24.08	255.86	V	2
18900	1880.0	-21.41	47.07	25.66	<b>368.13</b>	V	2
19100	1900.0	-22.23	46.26	24.03	252.99	V	2

CHANNEL BANDWIDTH: 20MHz 16QAM

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	LIMIT (W)
18700	1860.0	-23.18	43.50	20.32	107.62	H	2
18900	1880.0	-22.72	43.57	20.85	121.62	H	2
19100	1900.0	-22.91	43.62	20.71	117.65	H	2
18700	1860.0	-22.42	45.57	23.15	206.54	V	2
18900	1880.0	-22.48	47.07	24.59	287.74	V	2
19100	1900.0	-23.06	46.26	23.20	208.98	V	2

REMARKS: 1. EIRP Output Power (dBm) = SPA LVL (dBm) + Correction Factor (dB).

2. Correction factor (dB) = Free Space Loss + Antenna Factor + Cable Loss



## 4.2 FREQUENCY STABILITY MEASUREMENT

### 4.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT


The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

### 4.2.2 TEST PROCEDURE

- Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the  $\pm 0.5^{\circ}\text{C}$  during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

**NOTE:** The frequency error was recorded frequency error from the communication simulator.

### 4.2.3 TEST SETUP

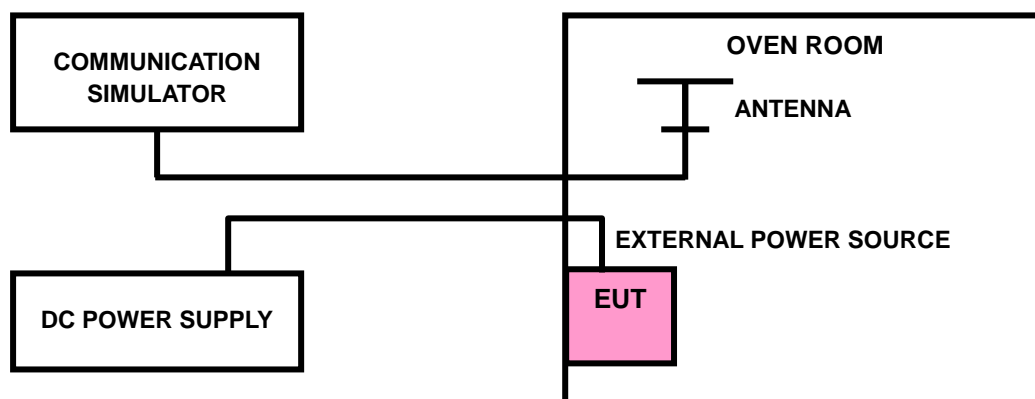



#### 4.2.4 TEST RESULTS

##### FREQUENCY ERROR VS. VOLTAGE

VOLTAGE (Volts)	FREQUENCY ERROR (ppm)			LIMIT (ppm)
	GSM	EDGE	WCDMA	
3.5	0.0011	0.0012	0.0013	2.5
3.8	-0.0016	-0.0016	-0.0017	2.5
4.2	-0.0014	-0.0014	-0.0015	2.5

**NOTE:** The applicant defined the normal working voltage of the battery is from 3.5Vdc to 4.2Vdc.

##### FREQUENCY ERROR vs. TEMPERATURE.

TEMP. (°C)	FREQUENCY ERROR (ppm)			LIMIT (ppm)
	GSM	EDGE	WCDMA	
-30	-0.0056	-0.0058	-0.0057	2.5
-20	-0.0050	-0.0052	-0.0051	2.5
-10	-0.0044	-0.0046	-0.0045	2.5
0	-0.0039	-0.0039	-0.0039	2.5
10	-0.0032	-0.0033	-0.0033	2.5
20	-0.0031	-0.0027	-0.0027	2.5
30	-0.0025	-0.0022	-0.0021	2.5
40	-0.0019	-0.0015	-0.0015	2.5
50	-0.0013	-0.0010	-0.0008	2.5
60	-0.0006	-0.0003	-0.0002	2.5



LTE BAND 2

AFC FREQUENCY ERROR vs. VOLTAGE							
VOLTAGE (Volts)	FREQUENCY ERROR (ppm)						LIMIT (ppm)
	1.4MHz	3MHz	5MHz	10MHz	15MHz	20MHz	
3.5	0.0028	0.0030	0.0030	0.0026	0.0029	0.0032	2.5
3.8	-0.0032	-0.0037	-0.0040	-0.0036	-0.0039	-0.0043	2.5
4.2	-0.0030	-0.0033	-0.0034	-0.0030	-0.0036	-0.0038	2.5

NOTE: The applicant defined the normal working voltage of the battery is from 3.5Vdc to 4.2Vdc.

AFC FREQUENCY ERROR vs. TEMPERATURE							
TEMP. (°C)	FREQUENCY ERROR (ppm)						LIMIT (ppm)
	1.4MHz	3MHz	5MHz	10MHz	15MHz	20MHz	
-30	-0.0056	-0.0059	-0.0060	-0.0057	-0.0057	-0.0060	2.5
-20	-0.0050	-0.0054	-0.0055	-0.0050	-0.0049	-0.0054	2.5
-10	-0.0043	-0.0048	-0.0048	-0.0043	-0.0043	-0.0048	2.5
0	-0.0037	-0.0041	-0.0041	-0.0036	-0.0038	-0.0040	2.5
10	-0.0030	-0.0034	-0.0034	-0.0029	-0.0032	-0.0033	2.5
20	-0.0023	-0.0028	-0.0027	-0.0028	-0.0026	-0.0025	2.5
30	-0.0017	-0.0022	-0.0022	-0.0022	-0.0018	-0.0017	2.5
40	-0.0011	-0.0015	-0.0014	-0.0015	-0.0016	-0.0015	2.5
50	-0.0005	-0.0009	-0.0007	-0.0007	-0.0011	-0.0009	2.5
60	0.0002	-0.0002	0.0001	0.0000	-0.0003	-0.0002	2.5




### 4.3 OCCUPIED BANDWIDTH MEASUREMENT

#### 4.3.1 TEST PROCEDURES

The EUT makes a call to the communication simulator. All measurements were done at low, middle and high operational frequency range. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.

#### 4.3.2 TEST SETUP

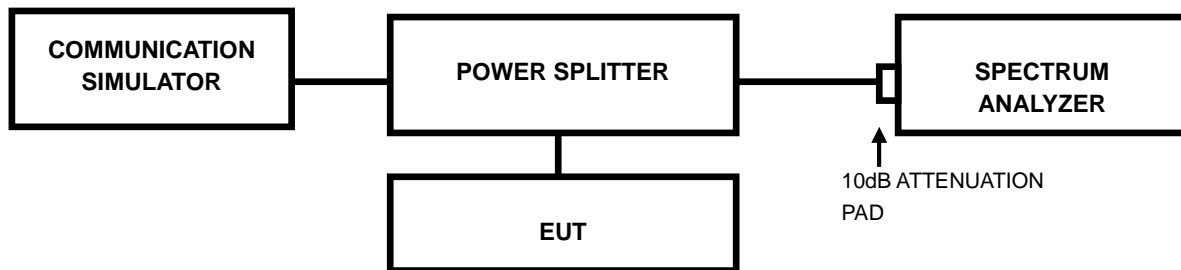




**BUREAU  
VERITAS**

Test Report No.: RF160816W001-4

### 4.3.3 TEST RESULTS

CHANNEL	FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH (kHz)		CHANNEL	FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH (MHz)
		GSM	EDGE			WCDMA
512	1850.2	245.00	242.00	9262	1852.4	4.13
661	1880.0	245.00	238.00	9400	1880.0	4.15
810	1909.8	246.00	241.00	9538	1907.6	4.14

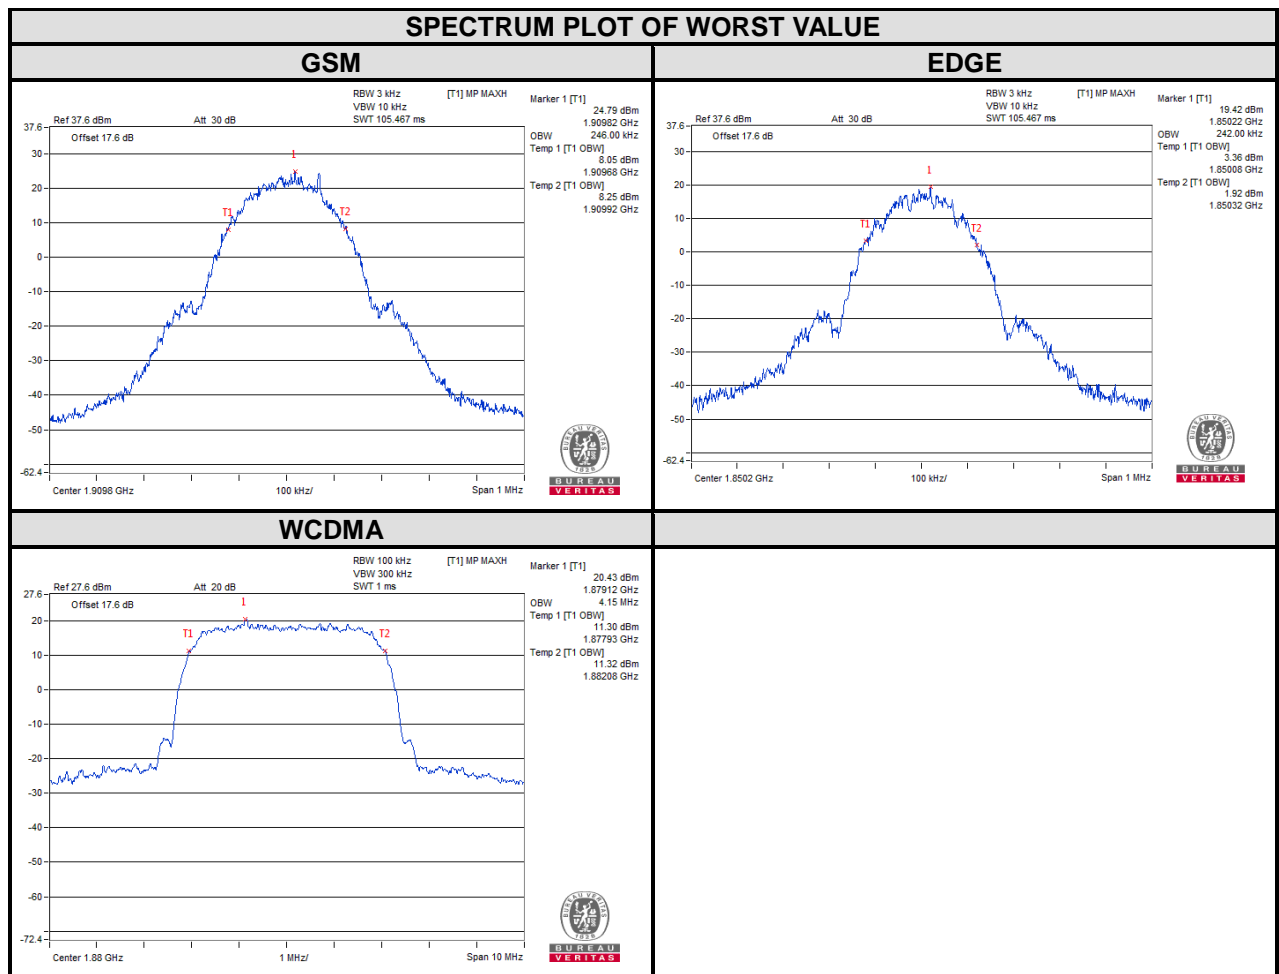

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,  
Houjie Town, Dongguan City,  
Guangdong 523942, China


Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)



**BUREAU  
VERITAS**

Test Report No.: RF160816W001-4

CHANNEL	FREQUENCY (MHz)	26dB BANDWIDTH (kHz)		CHANNEL	FREQUENCY (MHz)	26dB BANDWIDTH (MHz)
		GSM	EDGE			WCDMA
512	1850.2	319.37	313.57	9262	1852.4	4.72
661	1880.0	320.06	317.10	9400	1880.0	4.72
810	1909.8	316.30	314.78	9538	1907.6	4.71

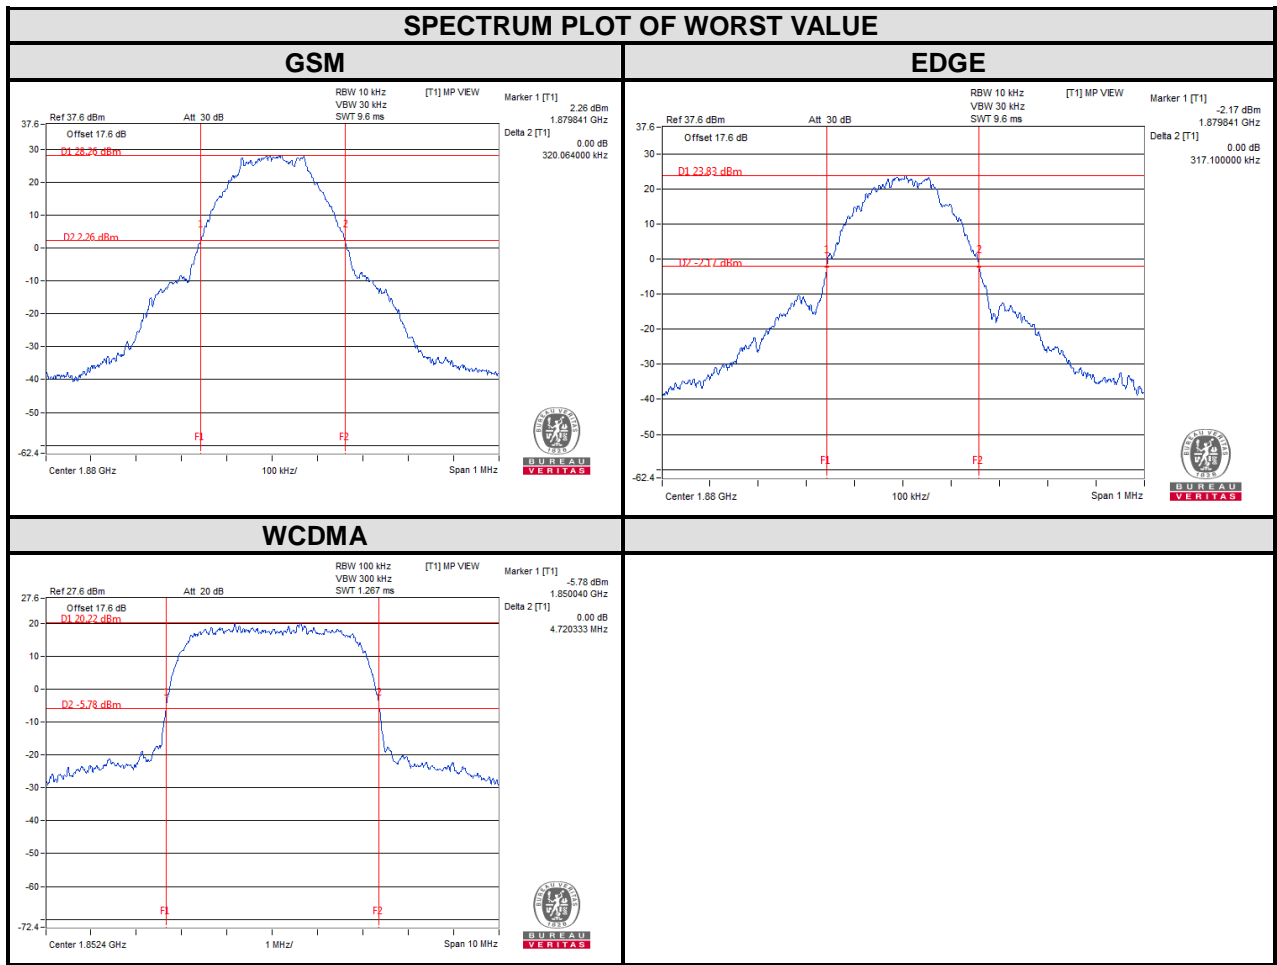

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,  
Houjie Town, Dongguan City,  
Guangdong 523942, China

Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)







**BUREAU  
VERITAS**

Test Report No.: RF160816W001-4

LTE band 2							
Channel Bandwidth : 1.4MHz							
Channel	Frequency (MHz)	99% Occupied bandwidth (MHz)		Channel	Frequency (MHz)	26 dB bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
18607	1850.7	1.09	1.08	18607	1850.7	1.26	1.28
18900	1880	1.09	1.08	18900	1880	1.26	1.28
19193	1909.3	1.08	1.08	19193	1909.3	1.26	1.29

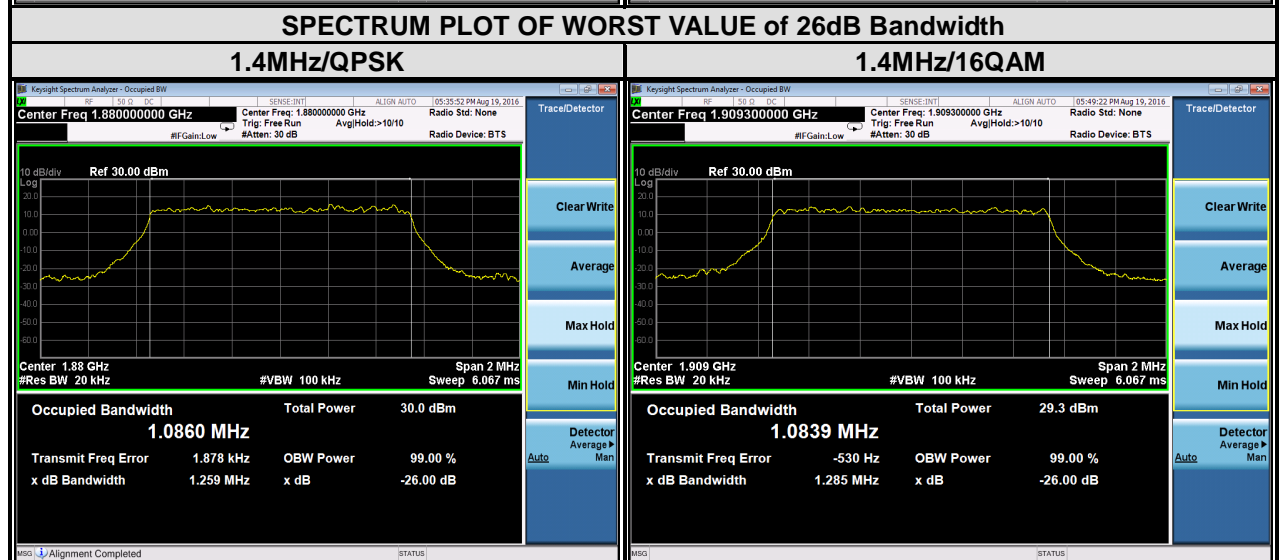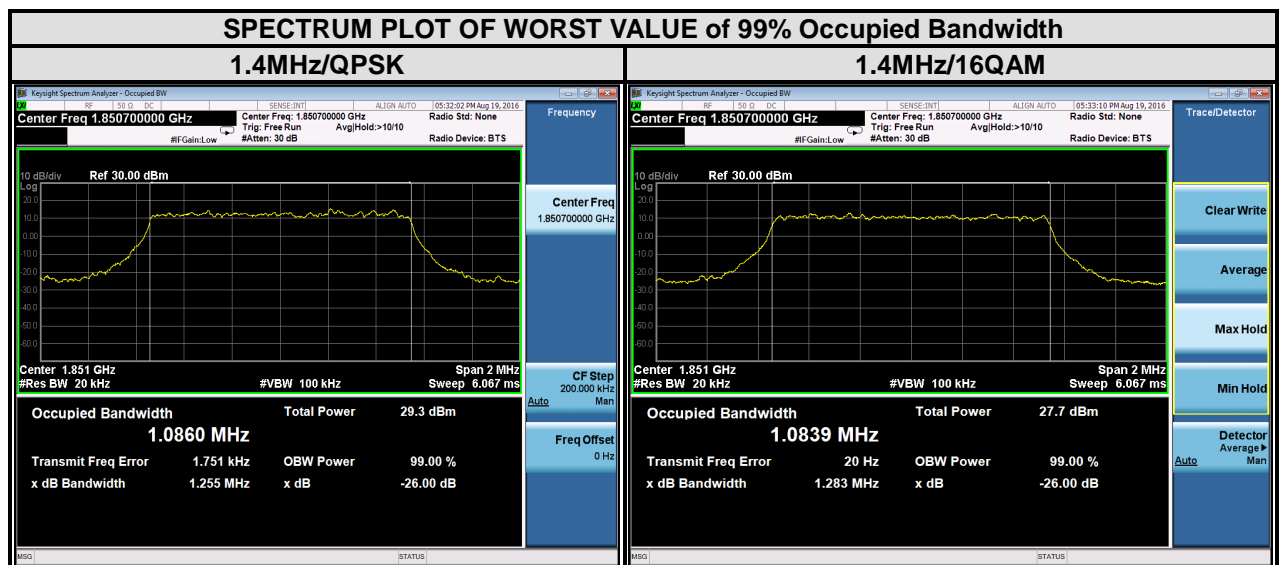

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,  
Houjie Town, Dongguan City,  
Guangdong 523942, China



Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)



**BUREAU  
VERITAS**

Test Report No.: RF160816W001-4

LTE band 2							
Channel Bandwidth : 3MHz							
Channel	Frequency (MHz)	99% Occupied bandwidth (MHz)		Channel	Frequency (MHz)	26 dB bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
18615	1851.5	2.69	2.68	18615	1851.5	2.96	2.92
18900	1880	2.69	2.68	18900	1880	2.94	2.91
19185	1908.5	2.68	2.68	19185	1908.5	2.95	2.92

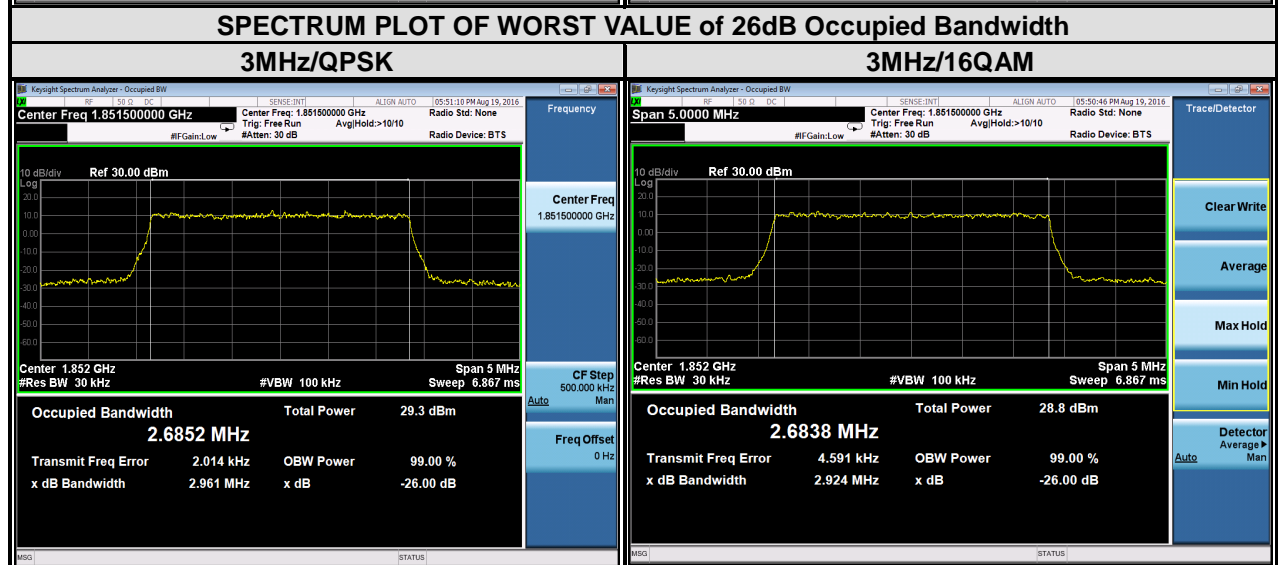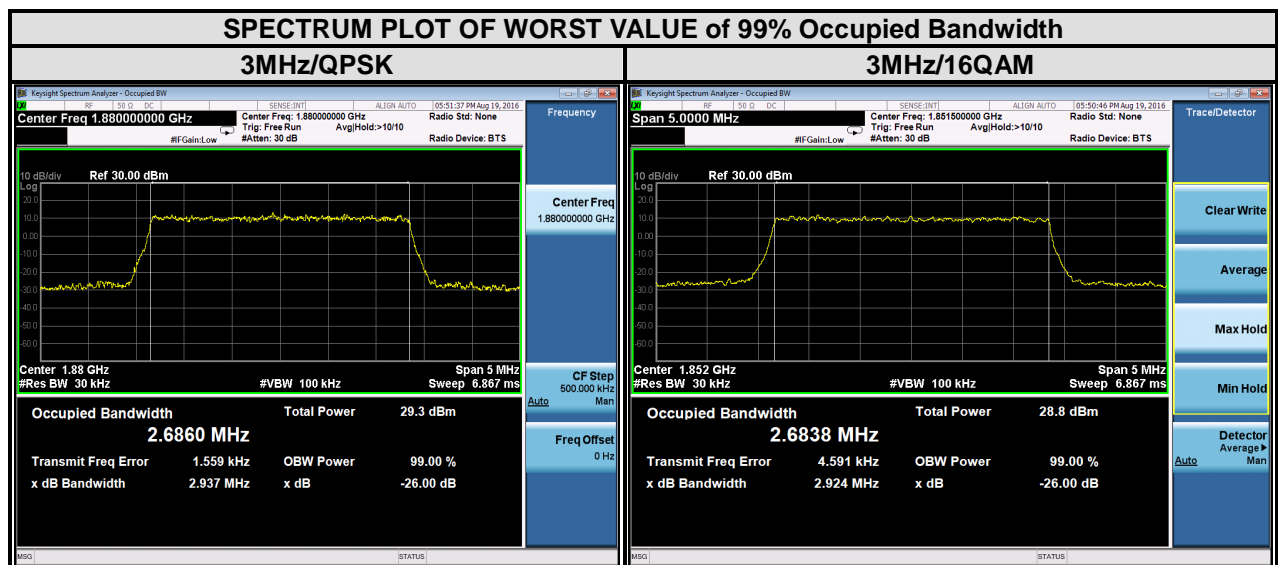

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,  
Houjie Town, Dongguan City,  
Guangdong 523942, China



Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)



**BUREAU  
VERITAS**

Test Report No.: RF160816W001-4

LTE band 2							
Channel Bandwidth : 5 MHz							
Channel	Frequency (MHz)	99% Occupied bandwidth (MHz)		Channel	Frequency (MHz)	26 dB bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
18625	1852.5	4.48	4.46	18625	1852.5	4.89	4.89
18900	1880	4.47	4.46	18900	1880	4.91	4.86
19175	1907.5	4.47	4.46	19175	1907.5	4.90	4.86

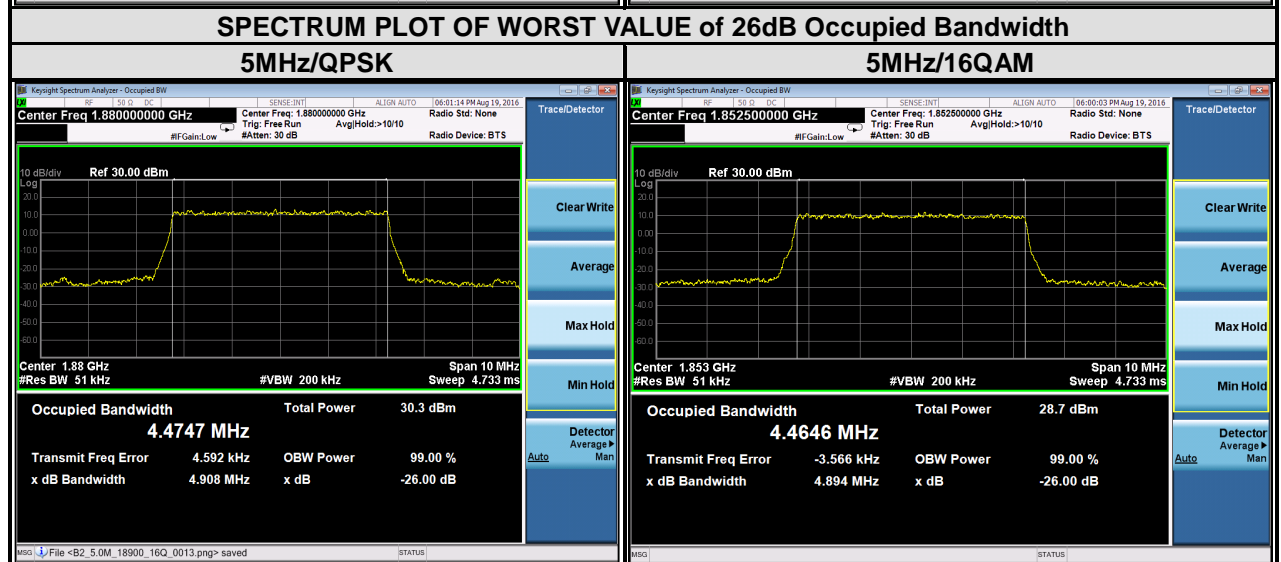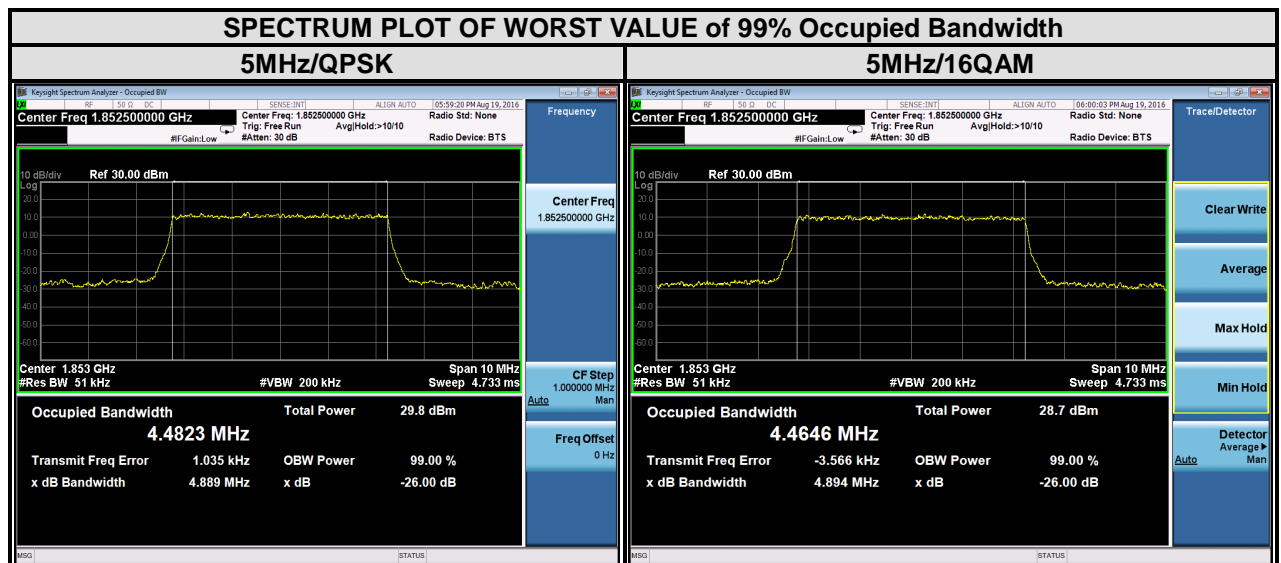

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,  
Houjie Town, Dongguan City,  
Guangdong 523942, China



Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)



**BUREAU  
VERITAS**

Test Report No.: RF160816W001-4

LTE band 2							
Channel Bandwidth : 10 MHz							
Channel	Frequency (MHz)	99% Occupied bandwidth (MHz)		Channel	Frequency (MHz)	26 dB bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
18650	1855	8.91	8.90	18650	1855	9.66	9.65
18900	1880	8.92	8.92	18900	1880	9.66	9.70
19150	1905	8.92	8.92	19150	1905	9.71	9.77

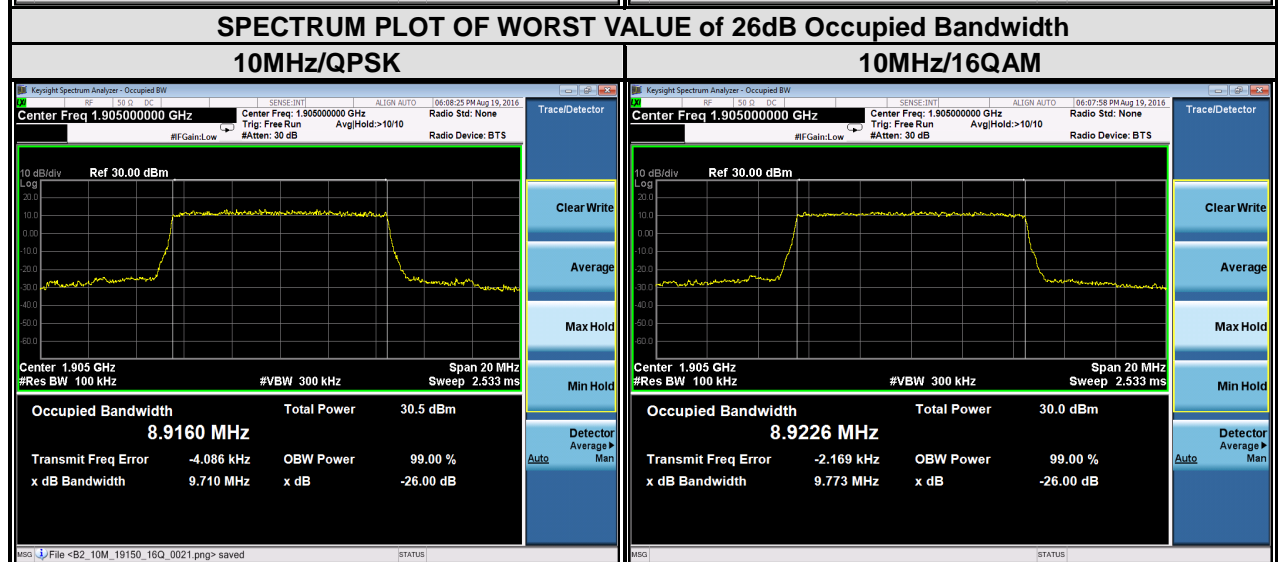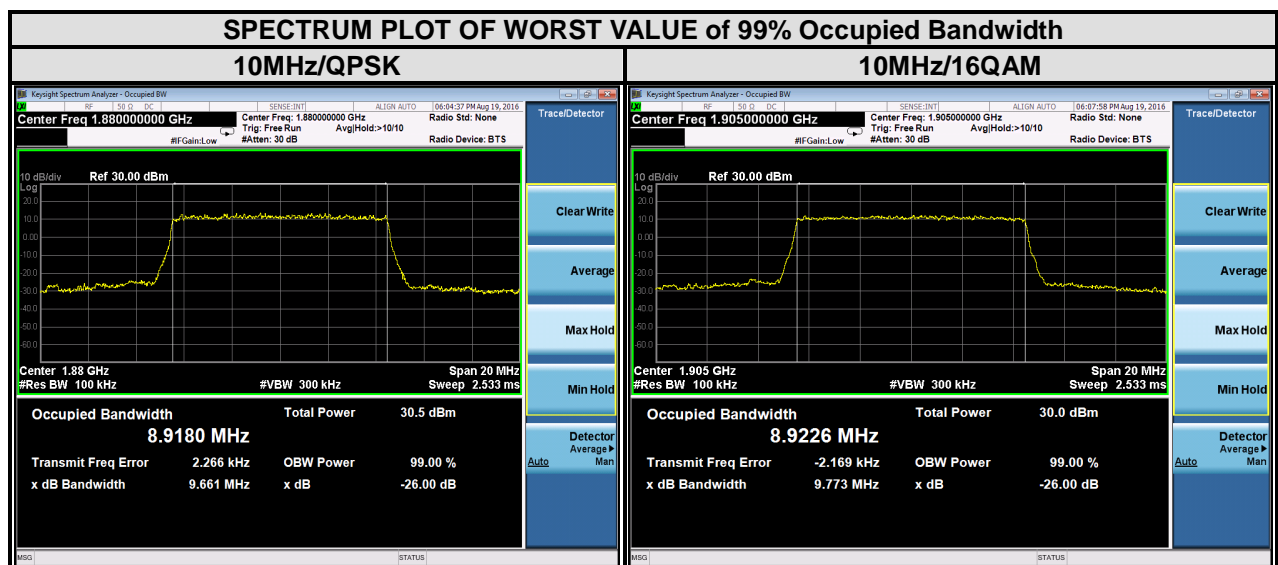

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,  
Houjie Town, Dongguan City,  
Guangdong 523942, China



Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)



BUREAU  
VERITAS

Test Report No.: RF160816W001-4

LTE band 2							
Channel Bandwidth : 15 MHz							
Channel	Frequency (MHz)	99% Occupied bandwidth (MHz)		Channel	Frequency (MHz)	26 dB bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
18675	1857.5	13.39	13.36	18675	1857.5	14.31	14.45
18900	1880	13.36	13.35	18900	1880	14.44	14.45
19125	1902.5	13.36	13.37	19125	1902.5	14.46	14.38

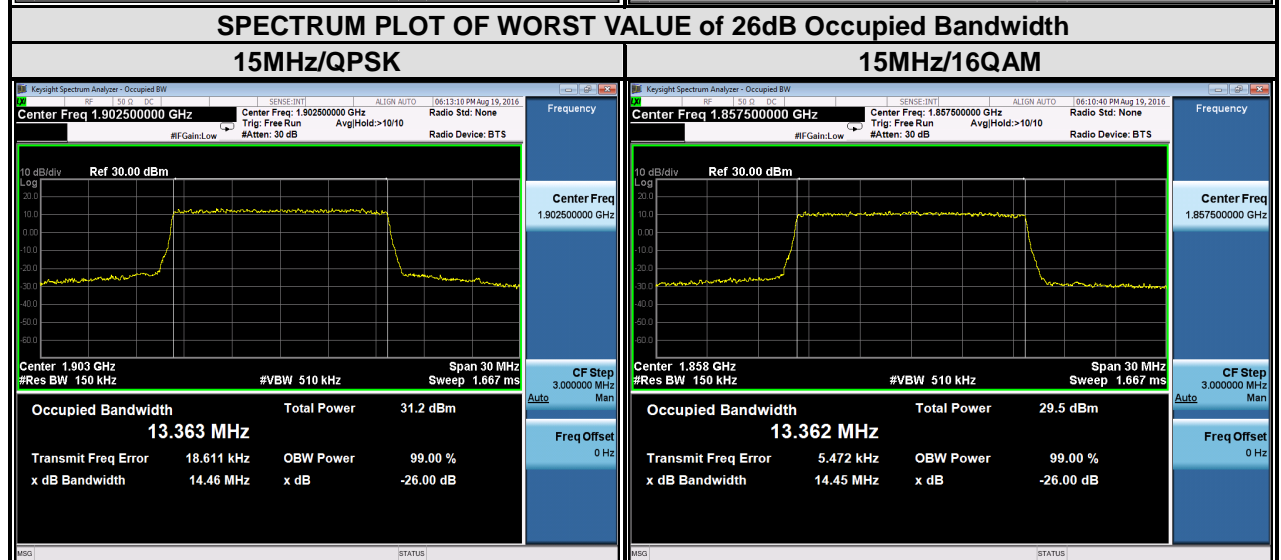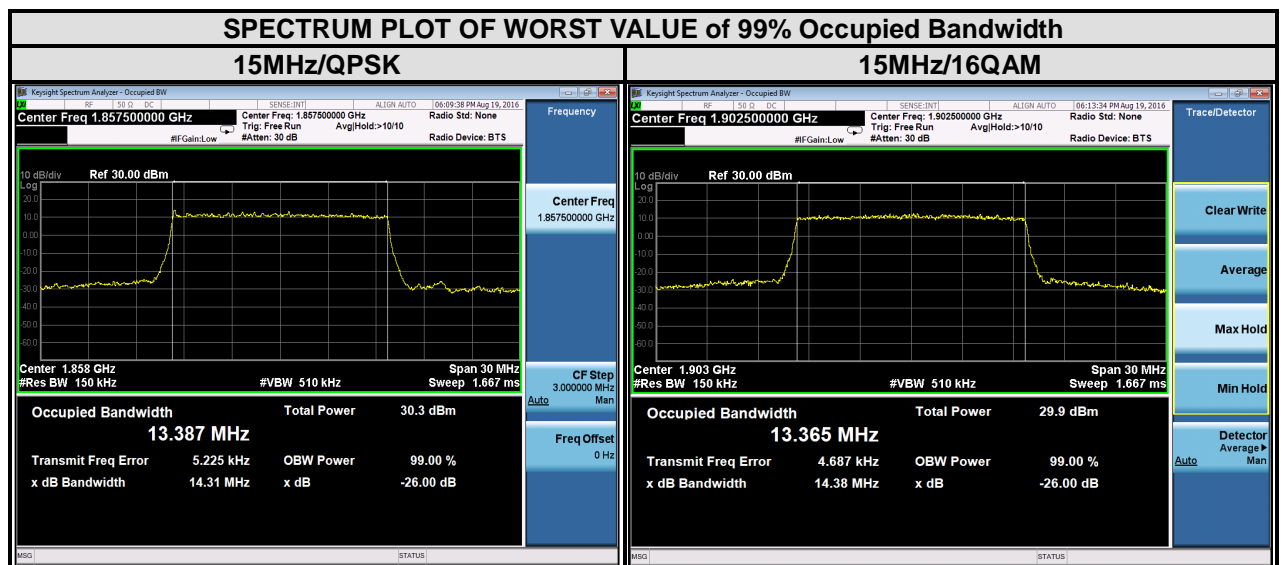

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,  
Houjie Town, Dongguan City,  
Guangdong 523942, China



Tel: +86 769 8593 5656  
 Fax: +86 769 8593 1080  
 Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)



**BUREAU  
VERITAS**

Test Report No.: RF160816W001-4

LTE band 2							
Channel Bandwidth : 20 MHz							
Channel	Frequency (MHz)	99% Occupied bandwidth (MHz)		Channel	Frequency (MHz)	26 dB bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
18700	1860	17.88	17.84	18700	1860	19.22	19.02
18900	1880	17.86	17.78	18900	1880	19.12	18.94
19100	1900	17.86	17.82	19100	1900	19.01	18.98

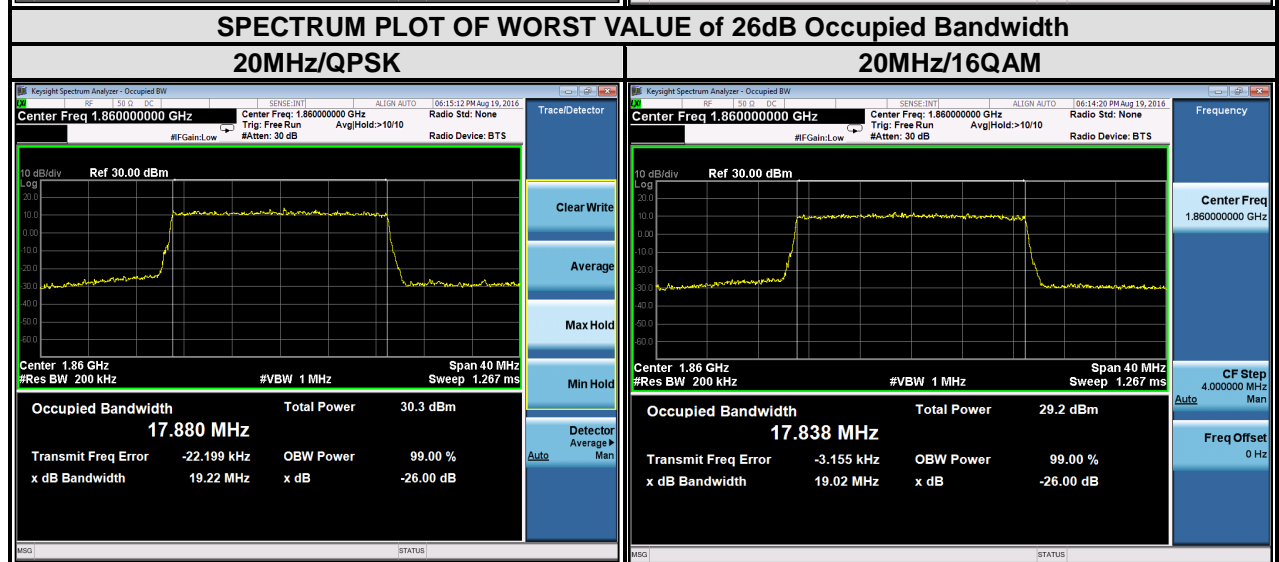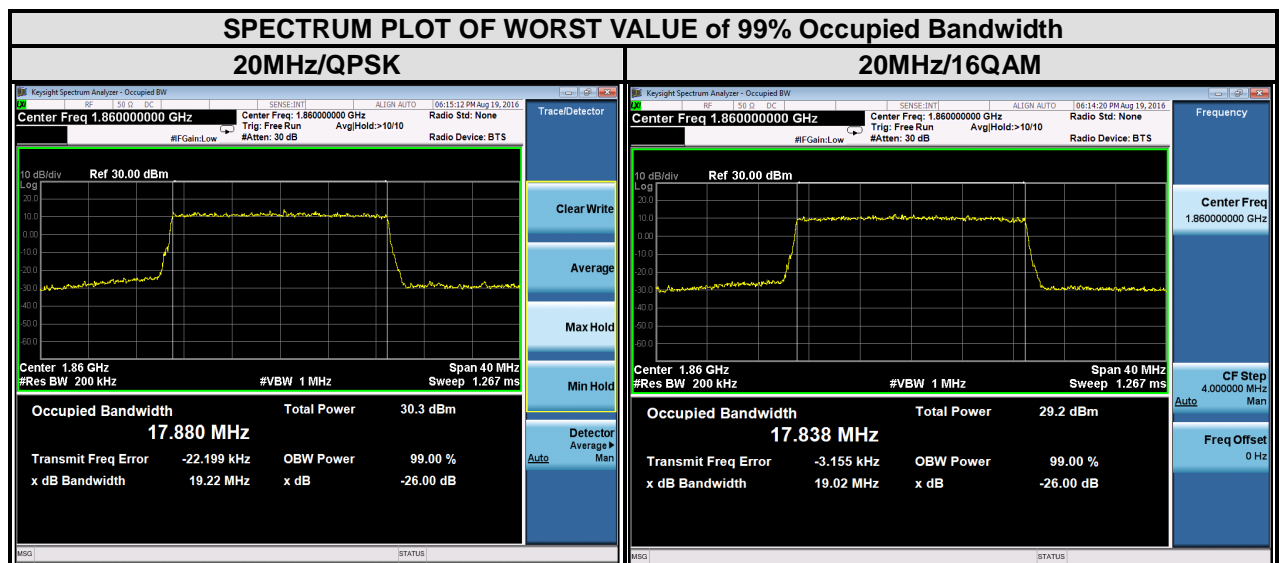

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,  
Houjie Town, Dongguan City,  
Guangdong 523942, China

Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)




## 4.4 BAND EDGE MEASUREMENT

### 4.4.1 LIMITS OF BAND EDGE MEASUREMENT

Power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

### 4.4.2 TEST SETUP

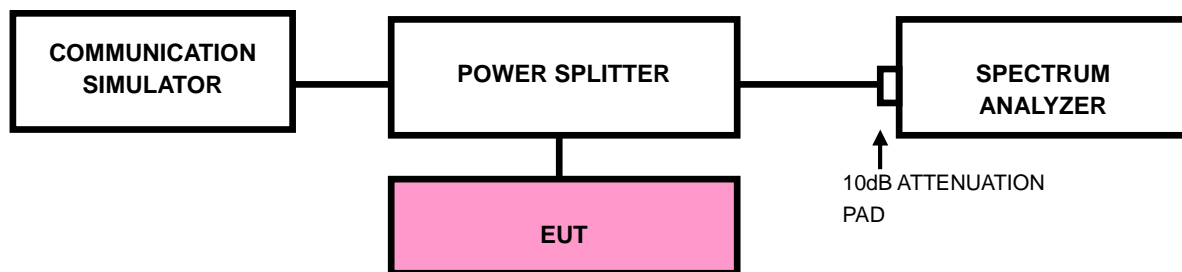

### 4.4.3 TEST PROCEDURES

- All measurements were done at low and high operational frequency range.
- The center frequency of spectrum is the band edge frequency and span is 1.5 MHz. RBW of the spectrum is 10kHz and VBW of the spectrum is 30kHz (GSM/GPRS/ EDGE).
- The center frequency of spectrum is the band edge frequency and span is 10MHz. RB of the spectrum is 100kHz and VB of the spectrum is 300kHz (WCDMA).
- The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RB of the spectrum is 20kHz and VB of the spectrum is 100 kHz. (LTE bandwidth 1.4MHz)
- The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RB of the spectrum is 30kHz and VB of the spectrum is 100kHz. (LTE bandwidth 3MHz)





**BUREAU  
VERITAS**

**Test Report No.: RF160816W001-4**

- f. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RB of the spectrum is 50kHz and VB of the spectrum is 200kHz. (LTE bandwidth 5MHz)
- g. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RB of the spectrum is 100kHz and VB of the spectrum is 300kHz. (LTE bandwidth 10MHz)
- h. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RB of the spectrum is 200kHz and VB of the spectrum is 1MHz. (LTE bandwidth 15MHz)
- i. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RB of the spectrum is 200kHz and VB of the spectrum is 1MHz. (LTE bandwidth 20MHz)
- j. Record the max trace plot into the test report.






BUREAU VERITAS

Test Report No.: RF160816W001-4

### 4.4.4. TEST RESULTS

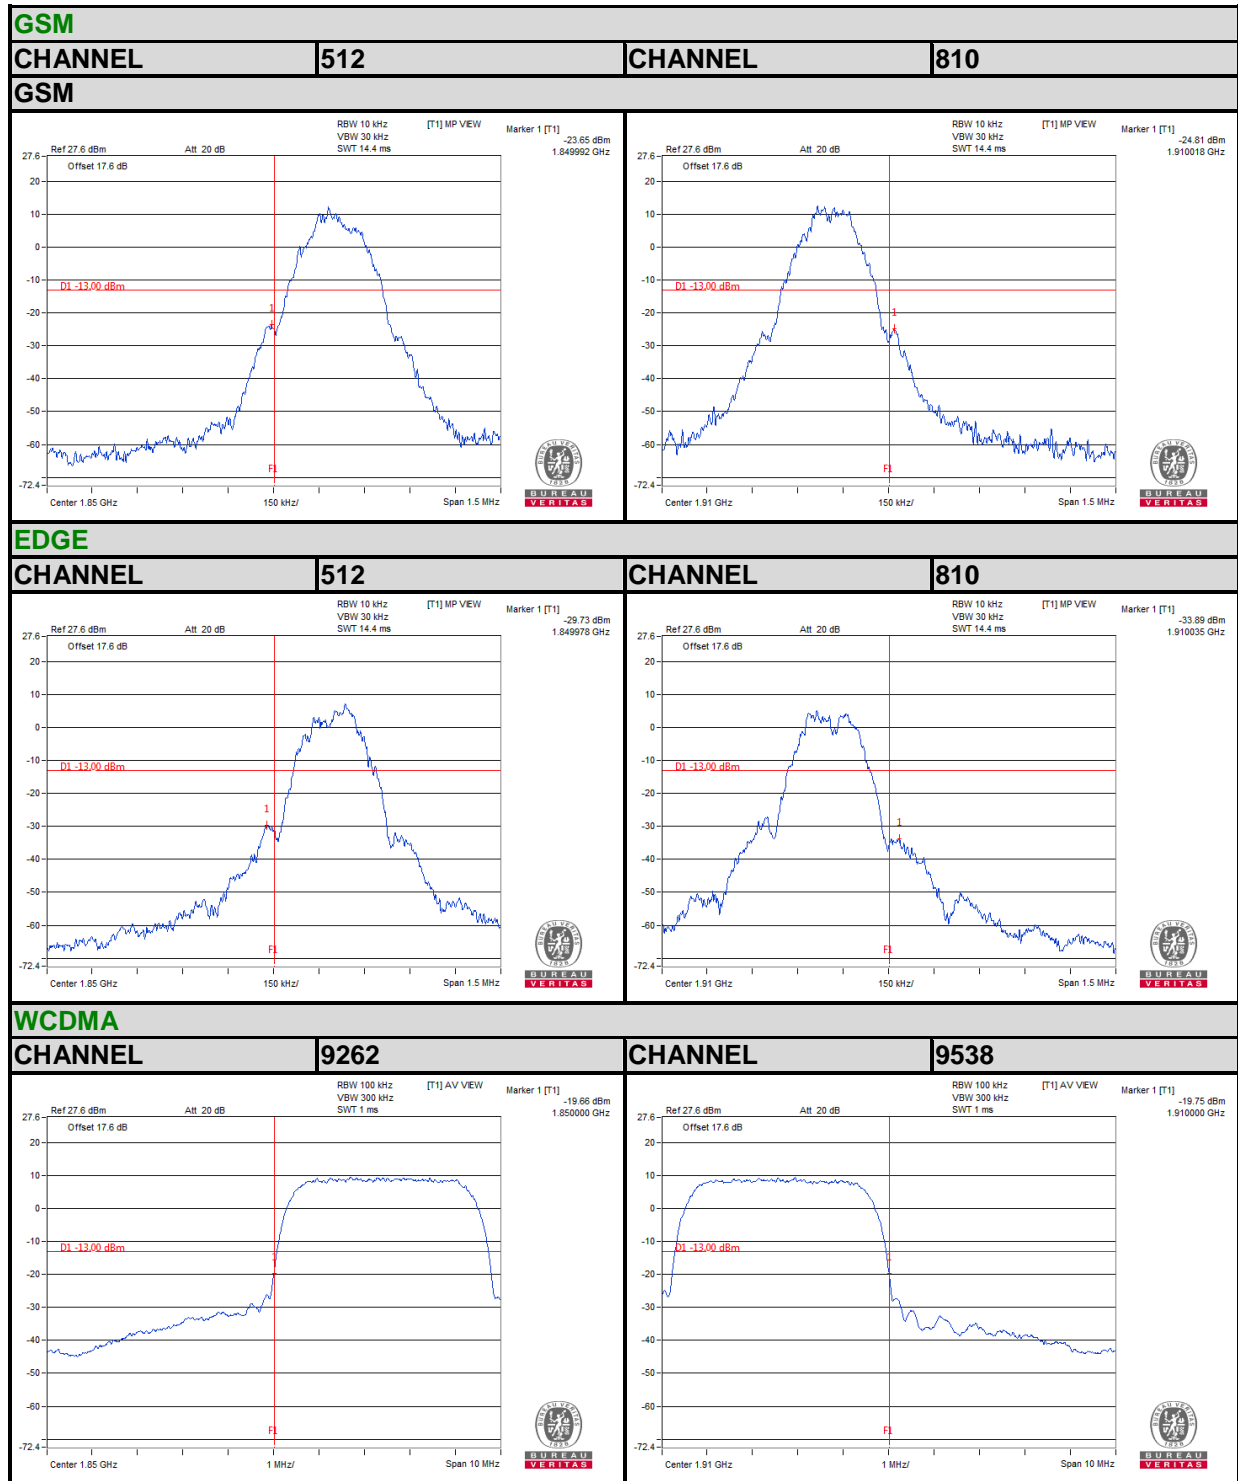

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,  
Houjie Town, Dongguan City,  
Guangdong 523942, China


Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)



BUREAU VERITAS

Test Report No.: RF160816W001-4

### LTE BAND 2

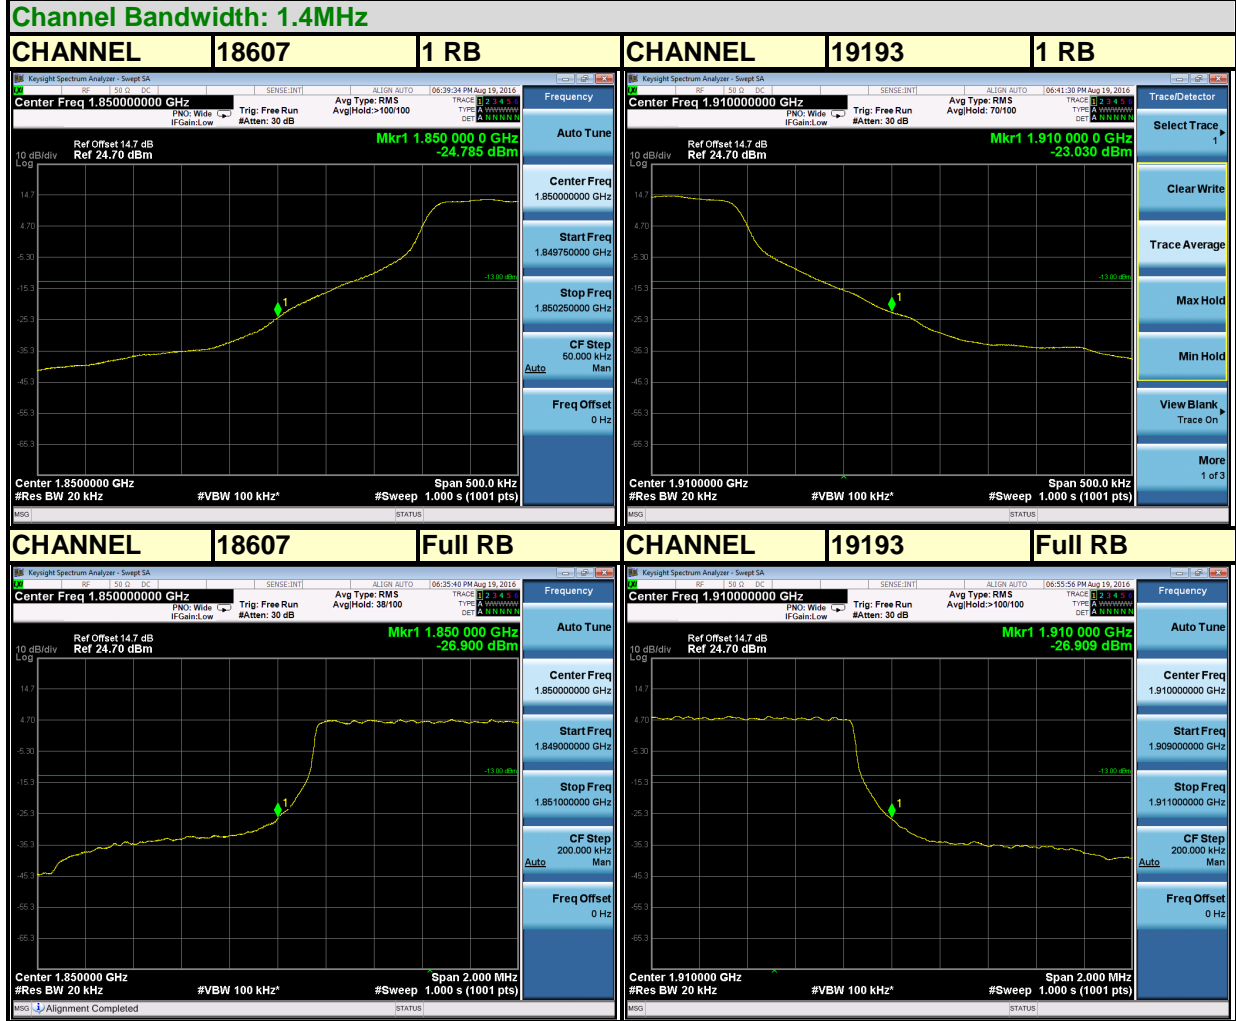

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,  
Houjie Town, Dongguan City,  
Guangdong 523942, China


Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)



BUREAU VERITAS

Test Report No.: RF160816W001-4

LTE BAND 2

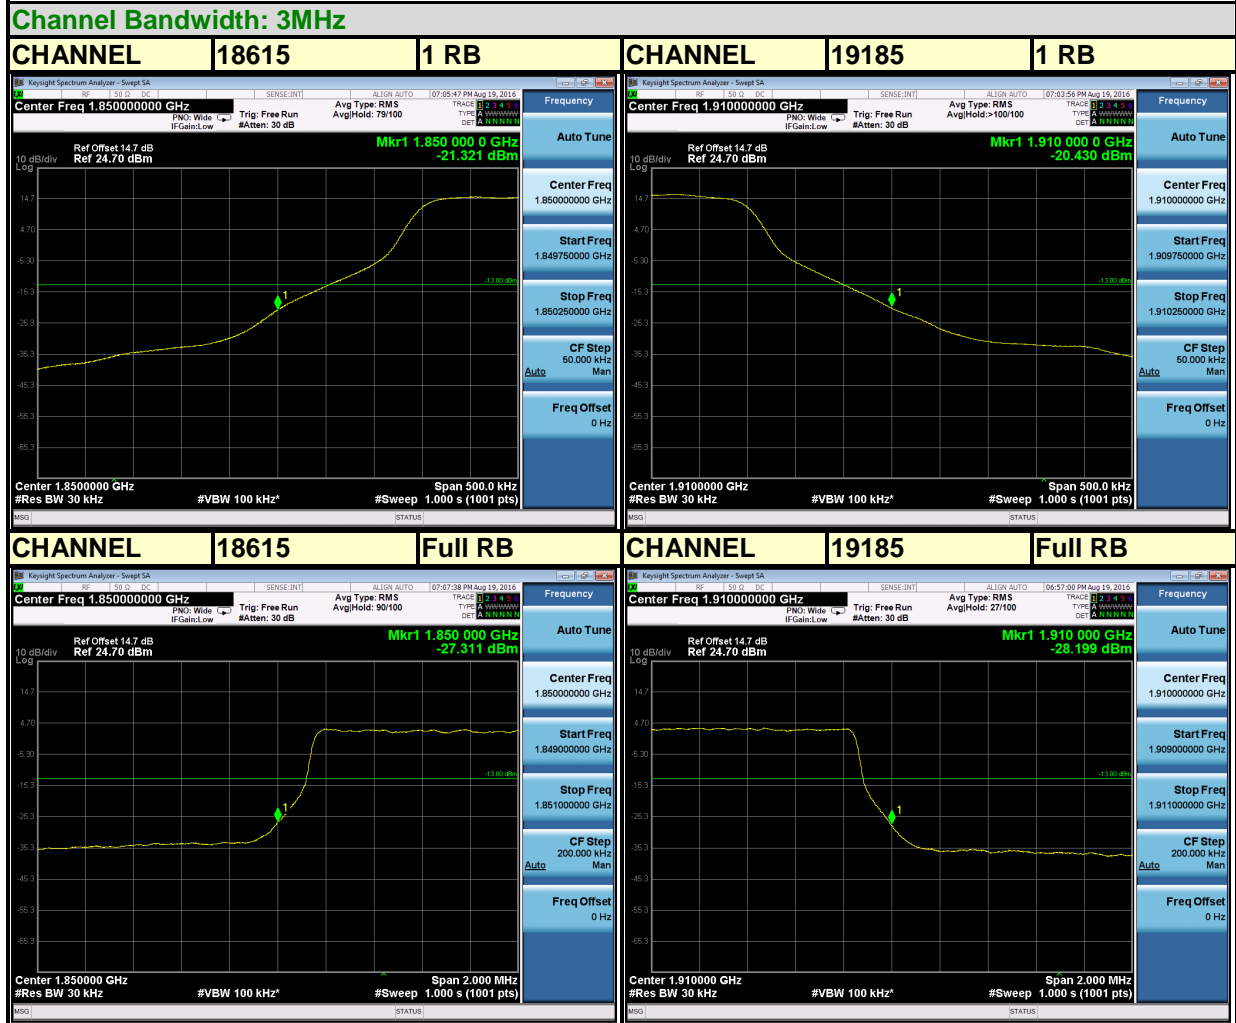

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,  
Houjie Town, Dongguan City,  
Guangdong 523942, China


Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)



BUREAU VERITAS

Test Report No.: RF160816W001-4

LTE BAND 2

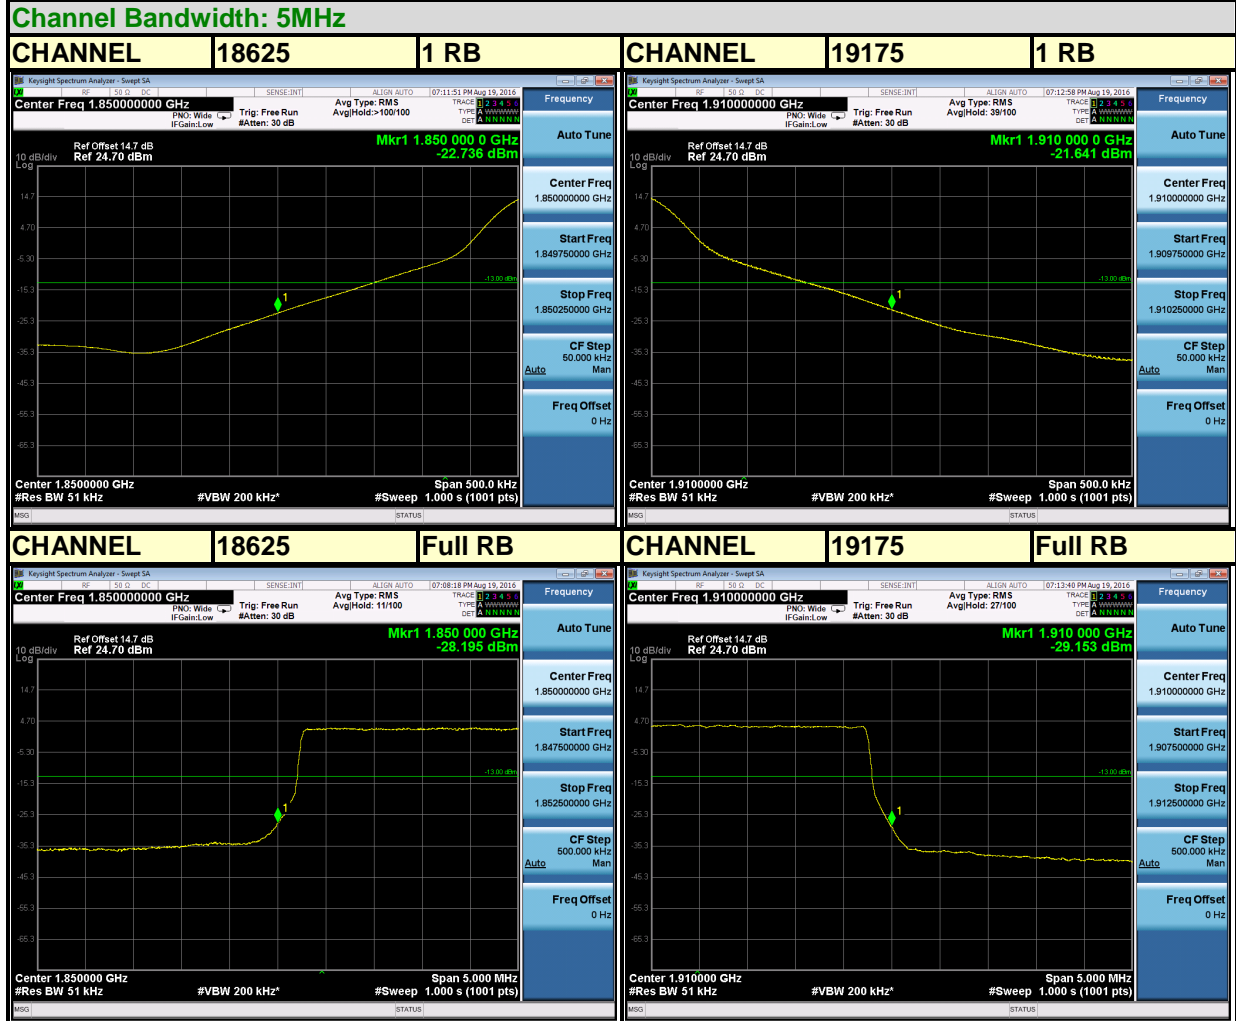

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,  
Houjie Town, Dongguan City,  
Guangdong 523942, China

Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)



BUREAU VERITAS

Test Report No.: RF160816W001-4

LTE BAND 2



Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,  
Houjie Town, Dongguan City,  
Guangdong 523942, China


Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)



BUREAU VERITAS

Test Report No.: RF160816W001-4

LTE BAND 2

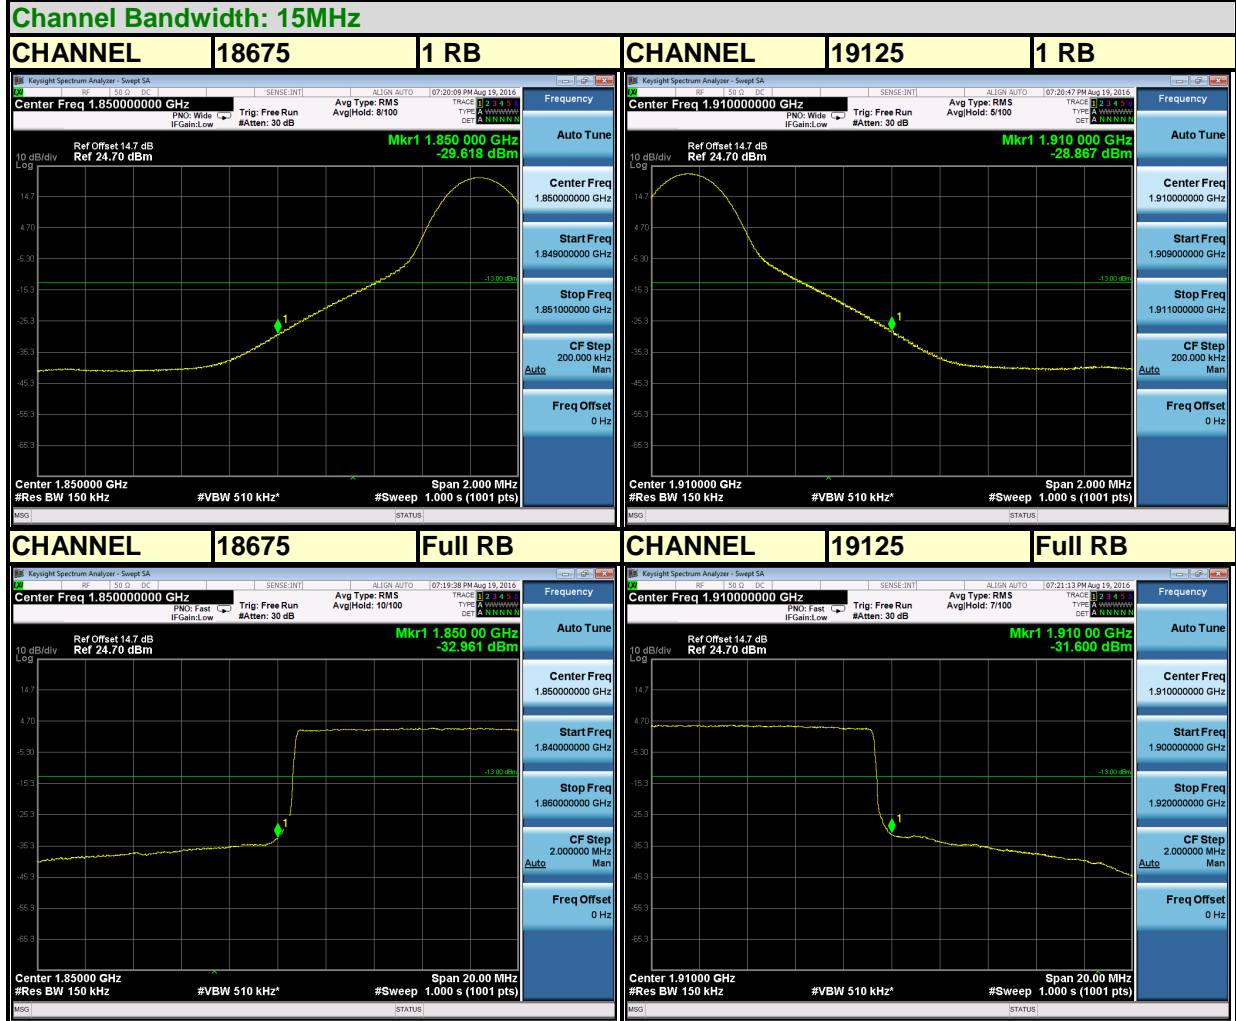

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,  
Houjie Town, Dongguan City,  
Guangdong 523942, China

Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)



BUREAU VERITAS

Test Report No.: RF160816W001-4

LTE BAND 2

Channel Bandwidth: 20MHz



Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,  
Houjie Town, Dongguan City,  
Guangdong 523942, China

Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)



## 4.5 CONDUCTED SPURIOUS EMISSIONS


### 4.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. The emission limit equal to  $-13\text{dBm}$ .

### 4.5.2 TEST PROCEDURE

- a. The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- b. Measuring frequency range is from 9 kHz to 19.1GHz. 20dB attenuation pad is connected with spectrum. RBW=1MHz and VBW=3MHz is used for conducted emission measurement.

### 4.5.3 TEST SETUP

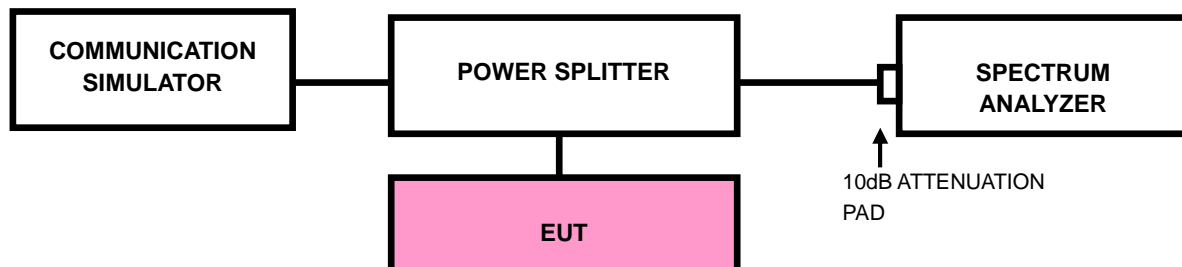






BUREAU VERITAS

Test Report No.: RF160816W001-4

### 4.5.4 TEST RESULTS

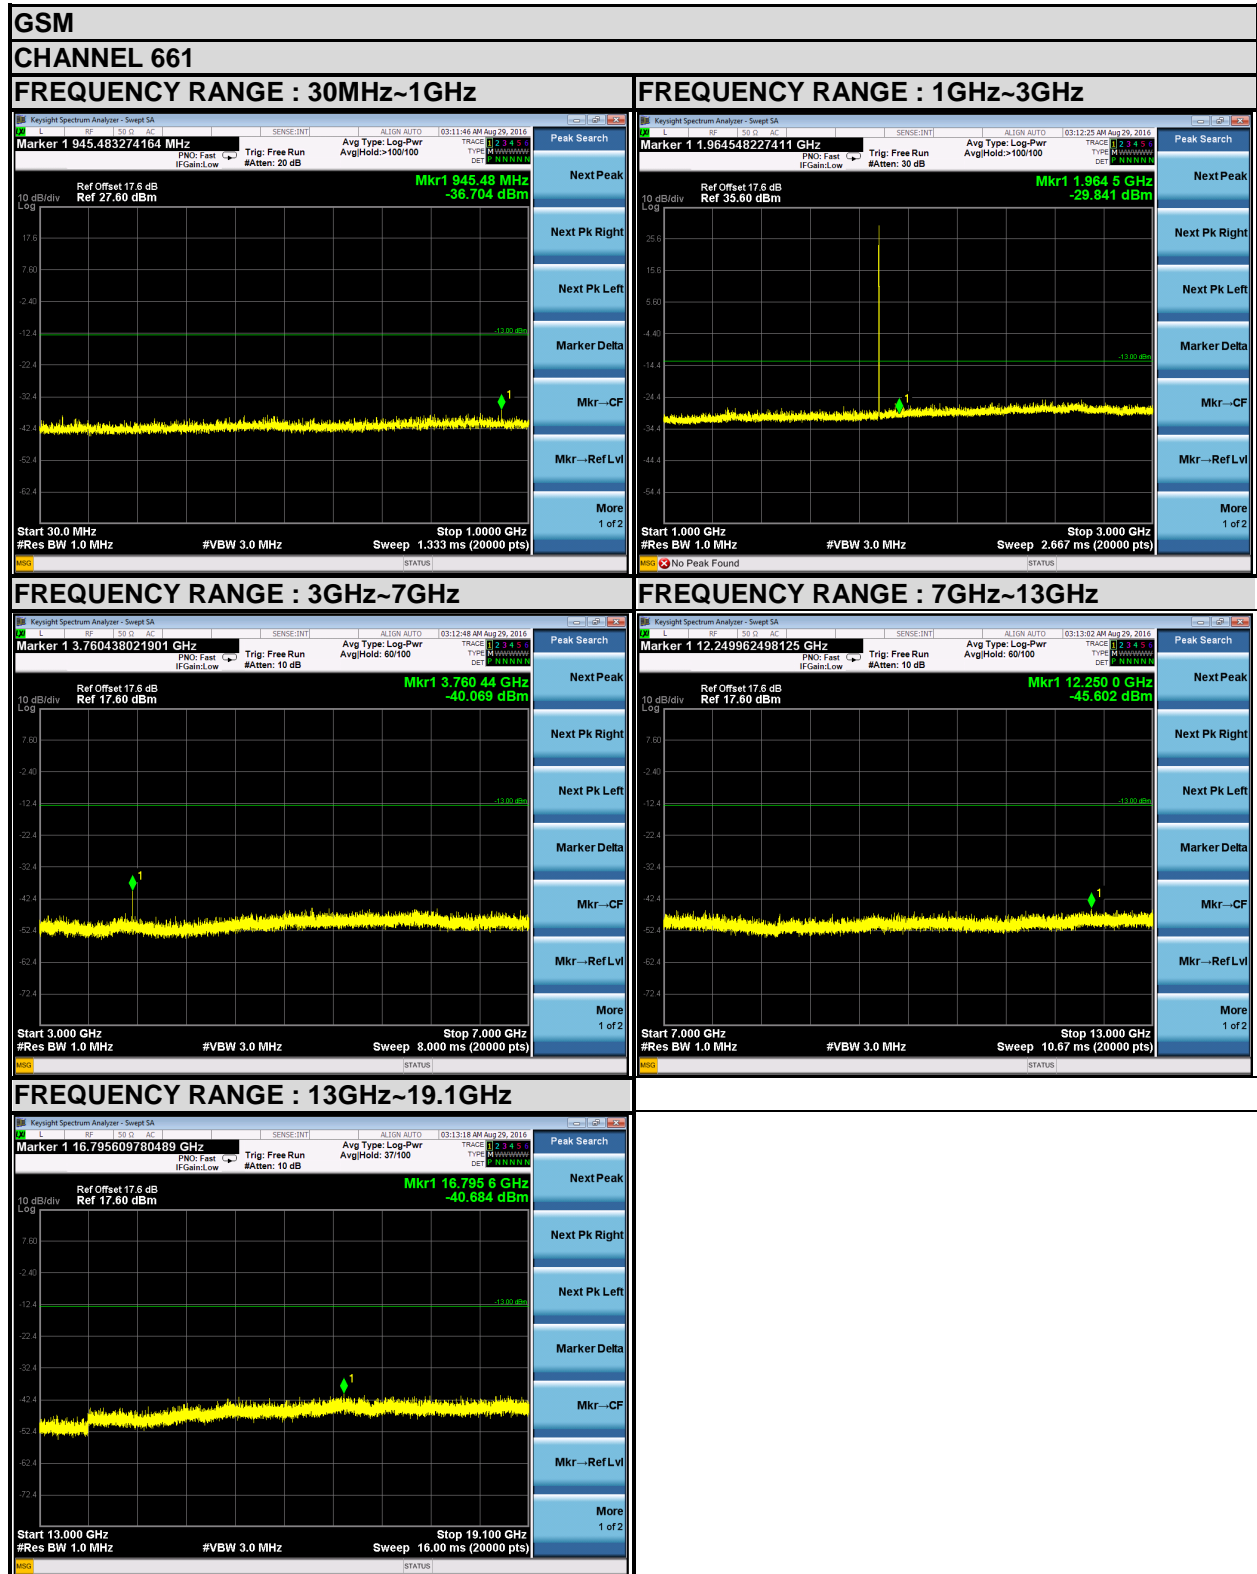

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,  
Houjie Town, Dongguan City,  
Guangdong 523942, China

Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)




BUREAU VERITAS

Test Report No.: RF160816W001-4


EDGE

CHANNEL 661

FREQUENCY RANGE : 30MHz~1GHz

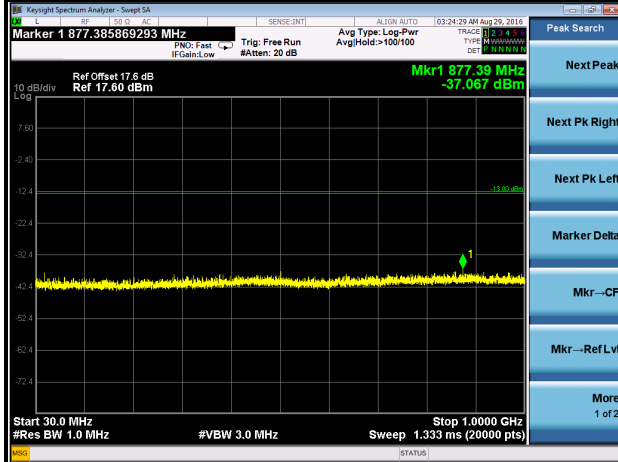


FREQUENCY RANGE : 1GHz~3GHz

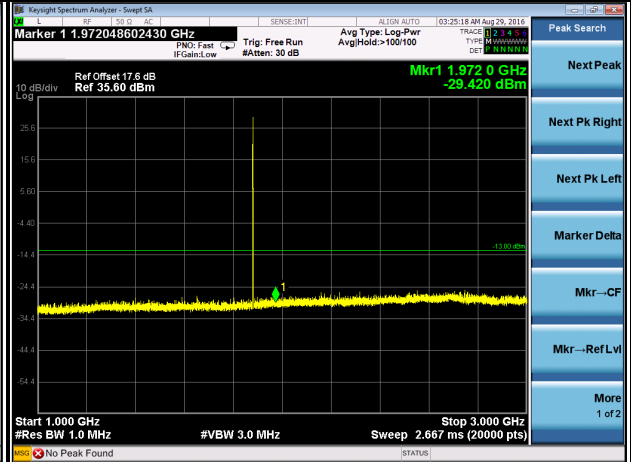



FREQUENCY RANGE : 3GHz~7GHz



FREQUENCY RANGE : 7GHz~13GHz

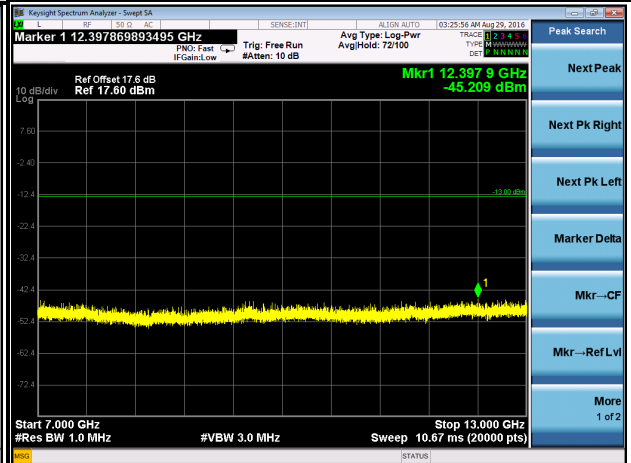

FREQUENCY RANGE : 13GHz~19.1GHz

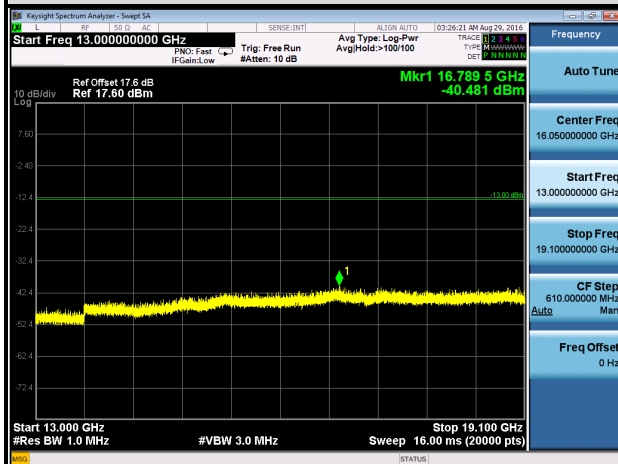

Bureau Veritas Shenzhen Co., Ltd. Dongguan Branch


No. 34, Chenwulu Section, Guantai Rd., Houjie Town, Dongguan City, Guangdong 523942, China

Tel: +86 769 8593 5656 Fax: +86 769 8593 1080 Email: customerservice.dg@cn.bureauveritas.com



BUREAU VERITAS

Test Report No.: RF160816W001-4

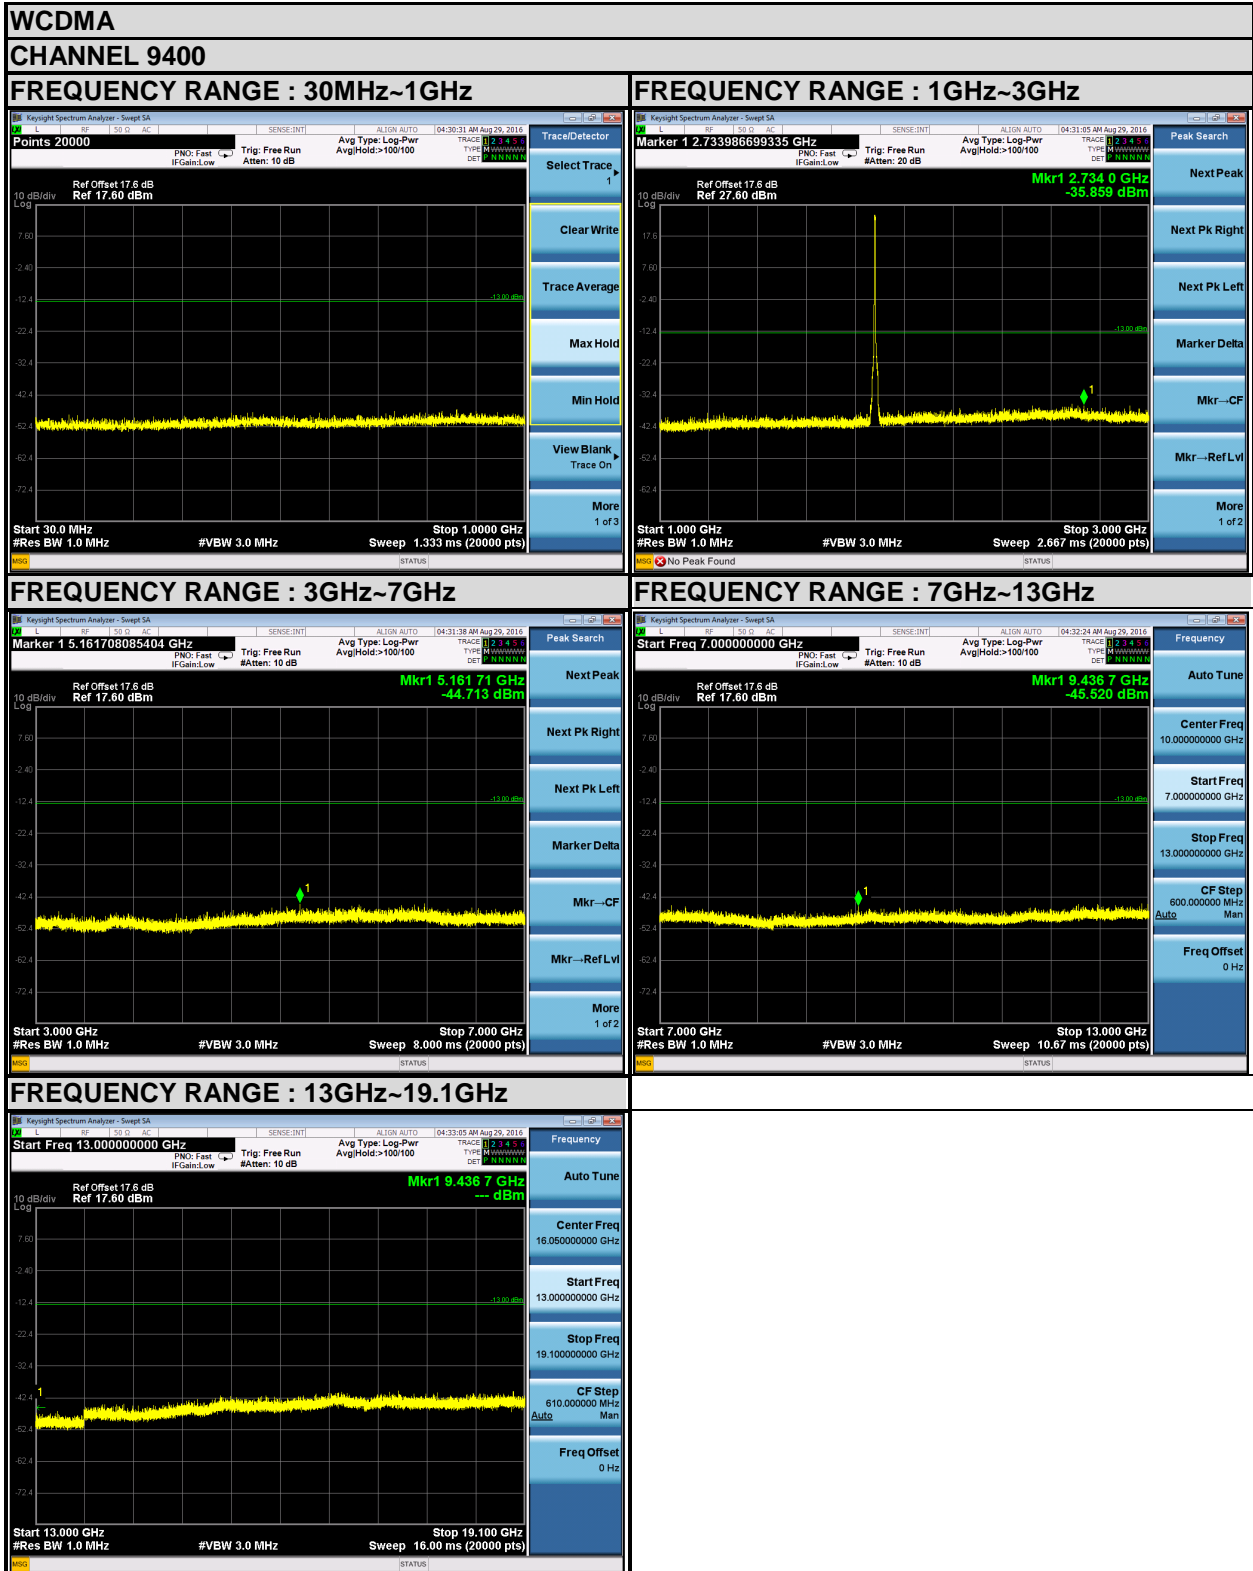

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,  
Houjie Town, Dongguan City,  
Guangdong 523942, China



Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)



BUREAU VERITAS

Test Report No.: RF160816W001-4

LTE BAND 2

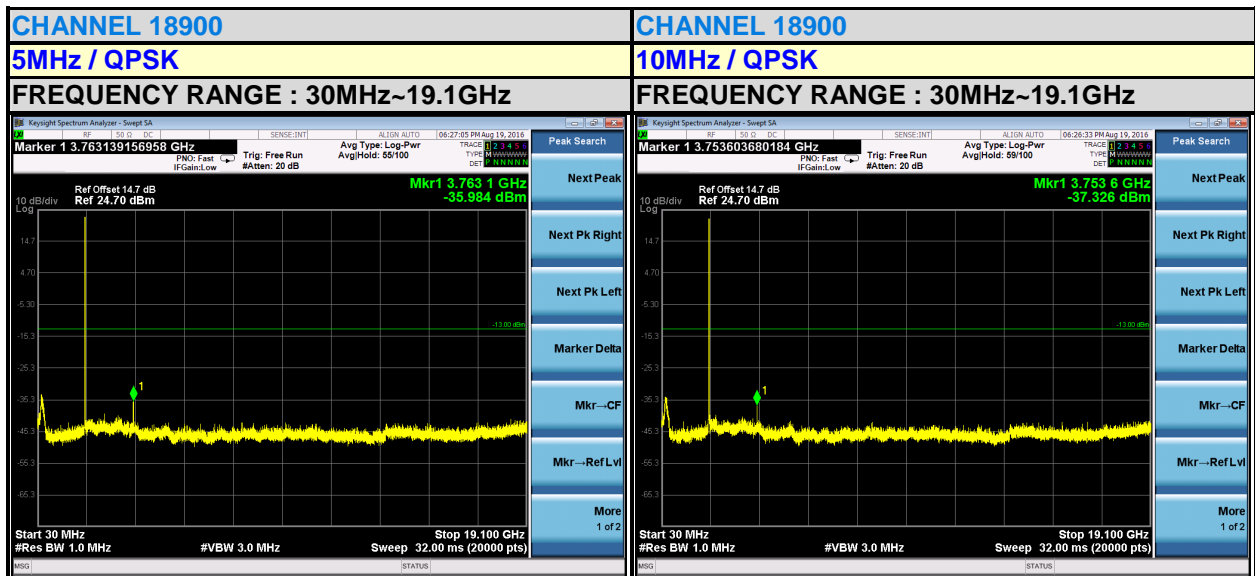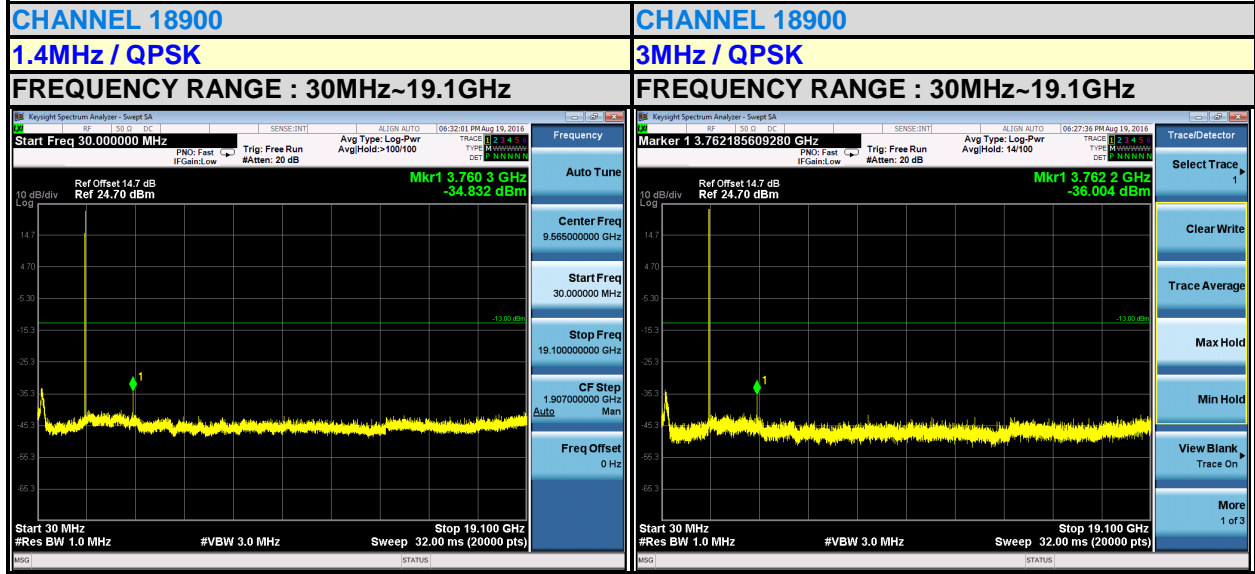

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch


No. 34, Chenwulu Section, Guantai Rd.,  
Houjie Town, Dongguan City,  
Guangdong 523942, China

Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)



BUREAU VERITAS

Test Report No.: RF160816W001-4

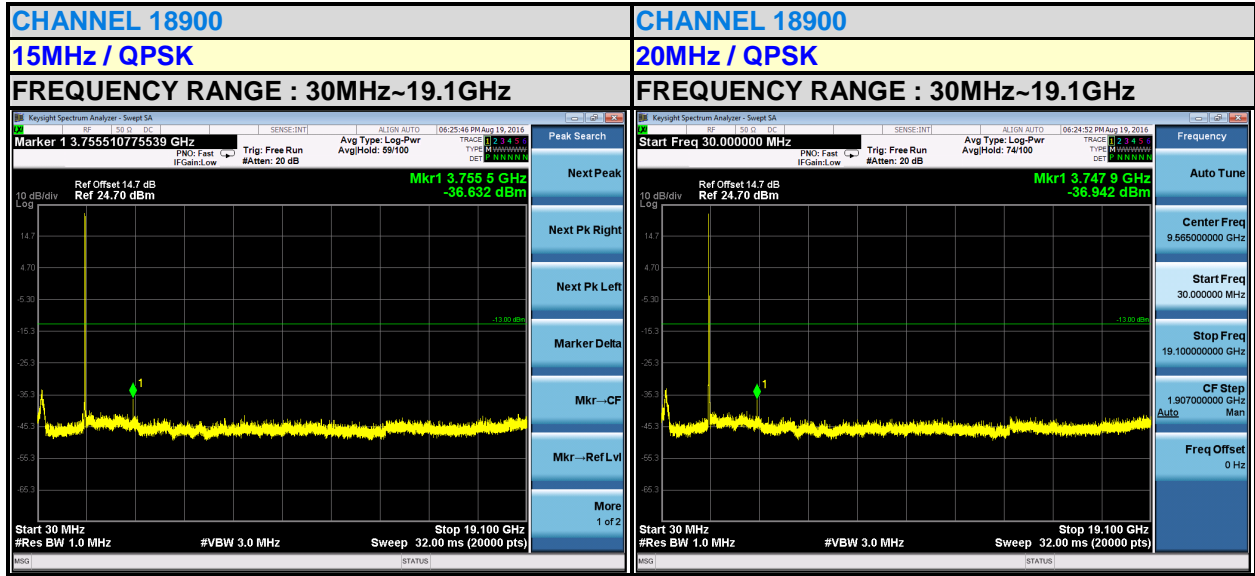

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,  
Houjie Town, Dongguan City,  
Guangdong 523942, China

Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)

## 4.6 RADIATED EMISSION MEASUREMENT

### 4.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. The emission limit equal to  $-13\text{dBm}$ .

### 4.6.2 TEST PROCEDURES

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to “Read Value “ of step a. Record the power level of S.G
- c.  $\text{EIRP} = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$ .


**NOTE:** The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.

### 4.6.3 DEVIATION FROM TEST STANDARD

No deviation



#### 4.6.4 TEST SETUP

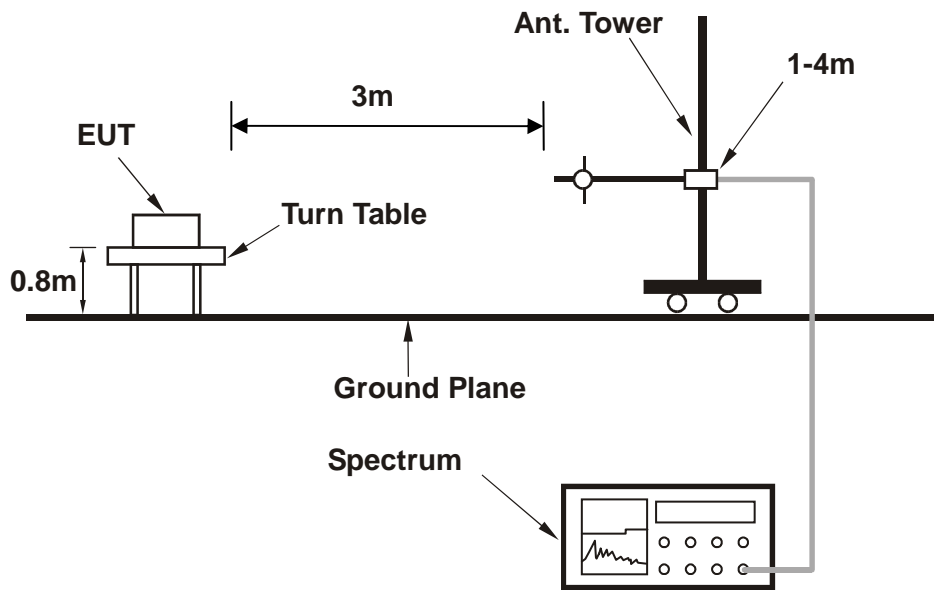

For the actual test configuration, please refer to the attached file (Test Setup Photo).




**4.6.5 TEST RESULTS**

**BELOW 1GHz WORST-CASE DATA**

**PCS 1900:**

<b>MODE</b>	TX channel 661	<b>FREQUENCY RANGE</b>	Below 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	26deg. C, 56%RH	<b>INPUT POWER</b>	DC 5V from adapter
<b>TESTED BY</b>	Alex Chen		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP	30.970	-30.16	-48.17	-13.00	-17.16	18.01 Peak	Horizontal
2		82.380	-46.28	-38.31	-13.00	-33.28	-7.97 Peak	Horizontal
3		113.420	-55.56	-41.60	-13.00	-42.56	-13.96 Peak	Horizontal
4		171.620	-57.76	-39.70	-13.00	-44.76	-18.06 Peak	Horizontal
5		211.390	-50.94	-33.92	-13.00	-37.94	-17.02 Peak	Horizontal
6		303.540	-56.19	-42.50	-13.00	-43.19	-13.69 Peak	Horizontal

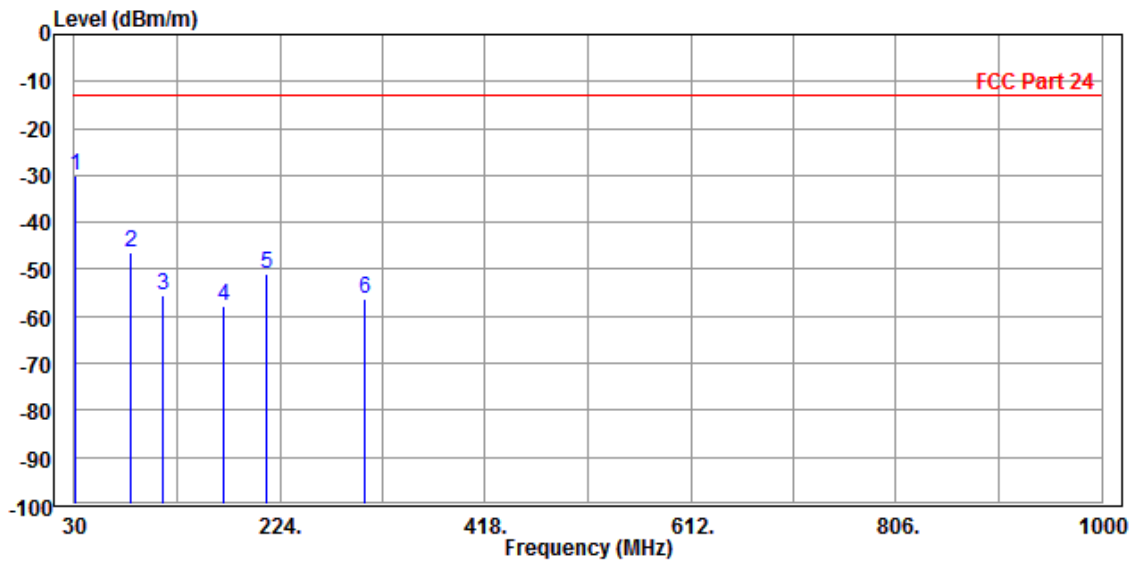






**BUREAU  
VERITAS**

**Test Report No.: RF160816W001-4**

<b>MODE</b>	TX channel 661	<b>FREQUENCY RANGE</b>	Below 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	26deg. C, 56%RH	<b>INPUT POWER</b>	DC 5V from adapter
<b>TESTED BY</b>	Alex Chen		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP	30.970	-32.15	-36.19	-13.00	-19.15	4.04 Peak	Vertical
2		48.430	-34.16	-29.93	-13.00	-21.16	-4.23 Peak	Vertical
3		78.500	-49.80	-38.75	-13.00	-36.80	-11.05 Peak	Vertical
4		106.630	-51.83	-40.28	-13.00	-38.83	-11.55 Peak	Vertical
5		201.690	-57.63	-46.97	-13.00	-44.63	-10.66 Peak	Vertical
6		281.230	-60.09	-48.71	-13.00	-47.09	-11.38 Peak	Vertical

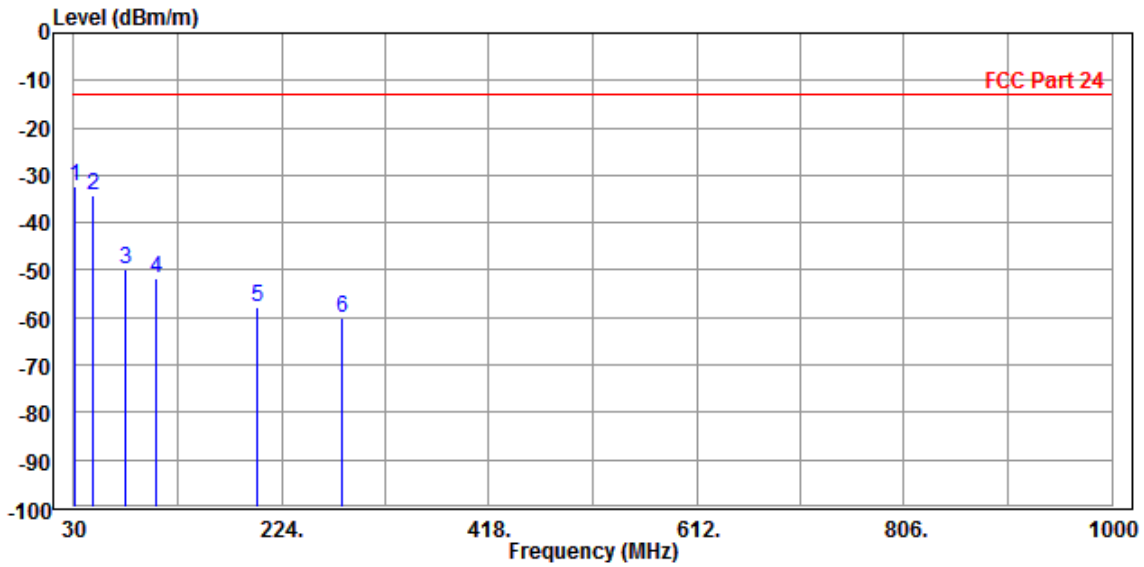



BUREAU VERITAS


Test Report No.: RF160816W001-4

ABOVE 1GHz DATA

PCS 1900:

MODE	TX channel 661	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	26deg. C, 56%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Alex Chen		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3755.000	-44.09	-47.48	-13.00	-31.09	3.39	Peak	Horizontal
2 PP	5636.000	-21.94	-31.06	-13.00	-8.94	9.12	Peak	Horizontal

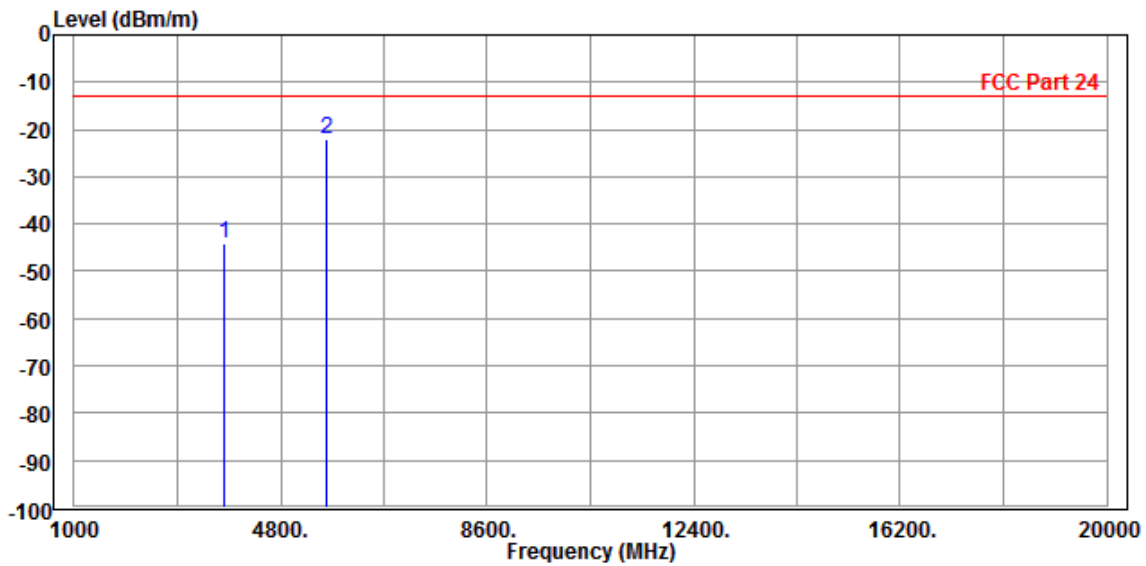




**BUREAU  
VERITAS**

**Test Report No.: RF160816W001-4**

<b>MODE</b>	TX channel 661	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	26deg. C, 56%RH	<b>INPUT POWER</b>	DC 5V from adapter
<b>TESTED BY</b>	Alex Chen		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3755.000	-47.59	-51.44	-13.00	-34.59	3.85	Peak	Vertical
2 PP	5636.000	-31.45	-39.70	-13.00	-18.45	8.25	Peak	Vertical

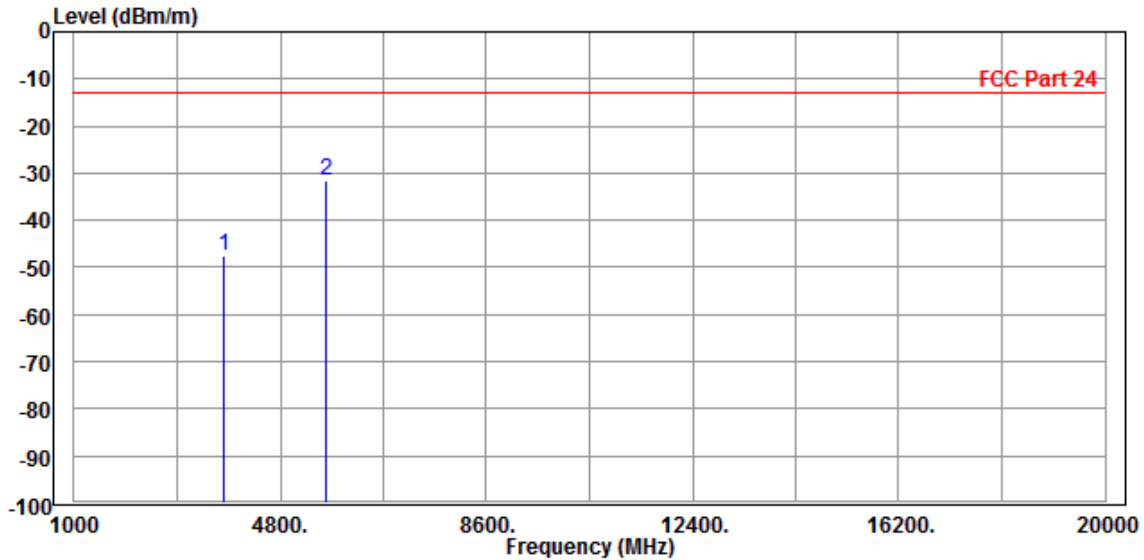




BUREAU VERITAS

Test Report No.: RF160816W001-4

EDGE 1900:

MODE	TX channel 661	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	26deg. C, 56%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Alex Chen		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3755.000	-53.13	-56.52	-13.00	-40.13	3.39	Peak	Horizontal
2 PP	5640.000	-45.68	-54.80	-13.00	-32.68	9.12	Peak	Horizontal

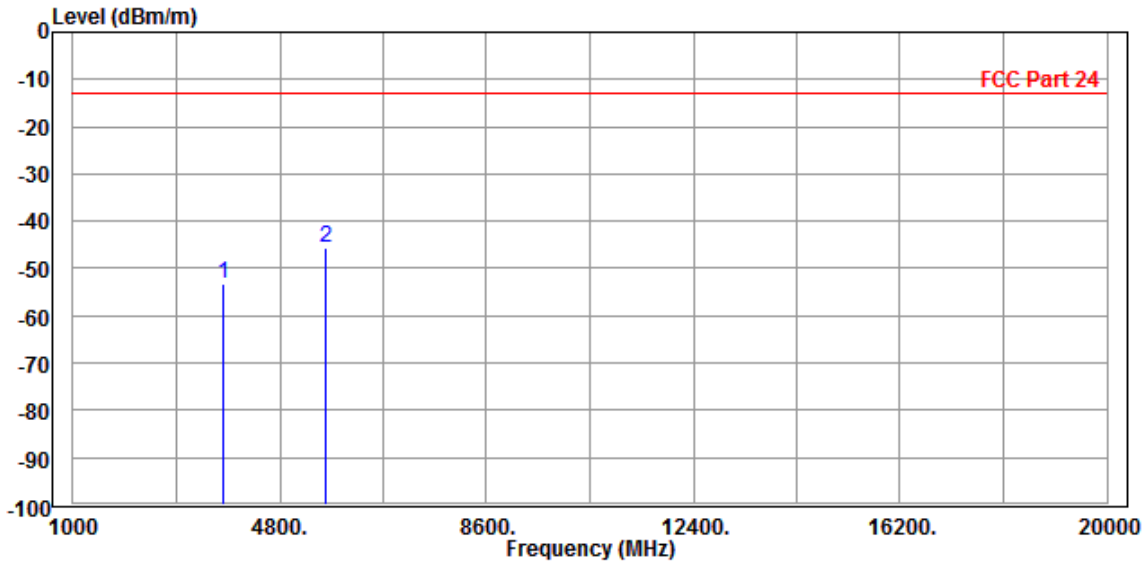

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,  
Houjie Town, Dongguan City,  
Guangdong 523942, China

Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)




**BUREAU  
VERITAS**

**Test Report No.: RF160816W001-4**

<b>MODE</b>	TX channel 661	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	26deg. C, 56%RH	<b>INPUT POWER</b>	DC 5V from adapter
<b>TESTED BY</b>	Alex Chen		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3755.000	-50.99	-54.84	-13.00	-37.99	3.85	Peak	Vertical
2 PP	5640.000	-47.21	-55.47	-13.00	-34.21	8.26	Peak	Vertical

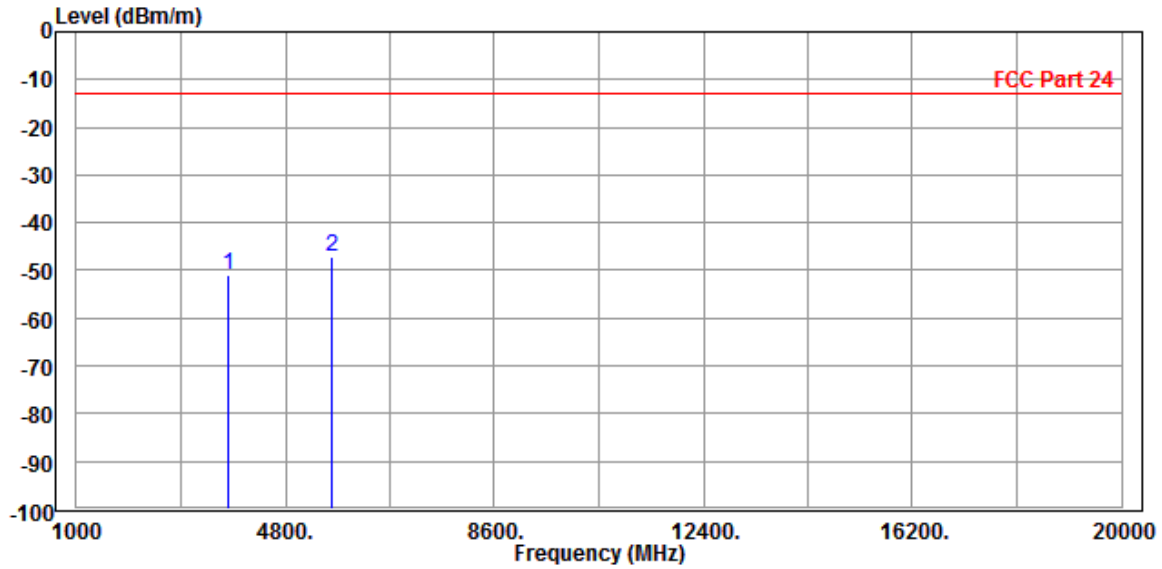

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,  
Houjie Town, Dongguan City,  
Guangdong 523942, China

Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)




**BUREAU  
VERITAS**

**Test Report No.: RF160816W001-4**

**WCDMA Band II:**

<b>MODE</b>	TX channel 9400	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	26deg. C, 56%RH	<b>INPUT POWER</b>	DC 5V from adapter
<b>TESTED BY</b>	Alex Chen		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3755.000	-52.18	-55.57	-13.00	-39.18	3.39	Peak	Horizontal
2	PP 5640.000	-46.21	-55.33	-13.00	-33.21	9.12	Peak	Horizontal

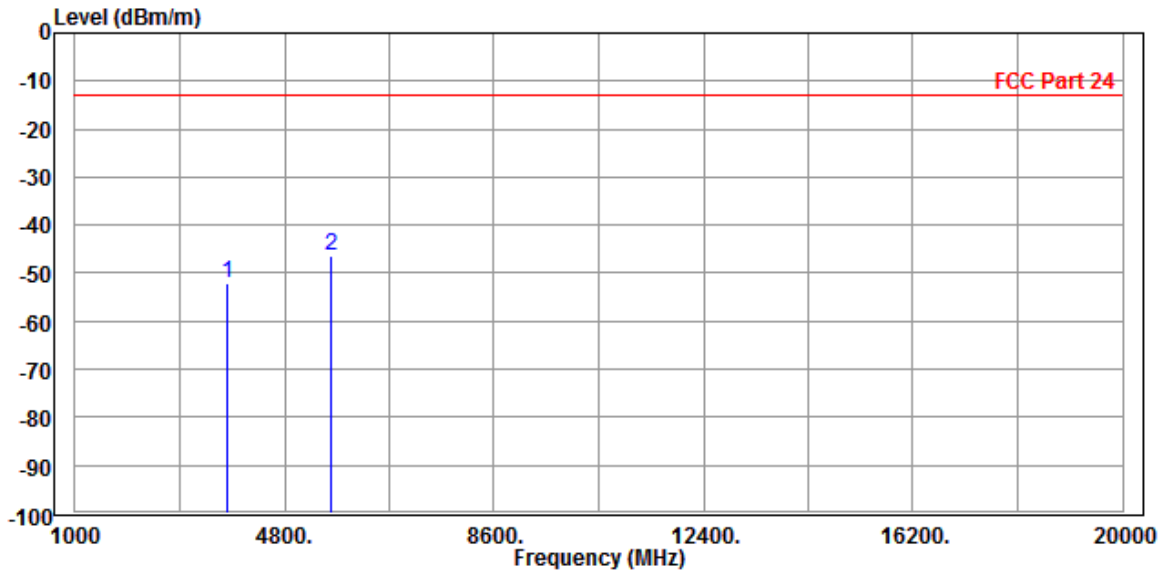

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,  
Houjie Town, Dongguan City,  
Guangdong 523942, China

Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)




**BUREAU  
VERITAS**

**Test Report No.: RF160816W001-4**

<b>MODE</b>	TX channel 9400	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	26deg. C, 56%RH	<b>INPUT POWER</b>	DC 5V from adapter
<b>TESTED BY</b>	Alex Chen		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3755.000	-52.20	-56.05	-13.00	-39.20	3.85	Peak	Vertical
2 PP	5640.000	-46.98	-55.24	-13.00	-33.98	8.26	Peak	Vertical

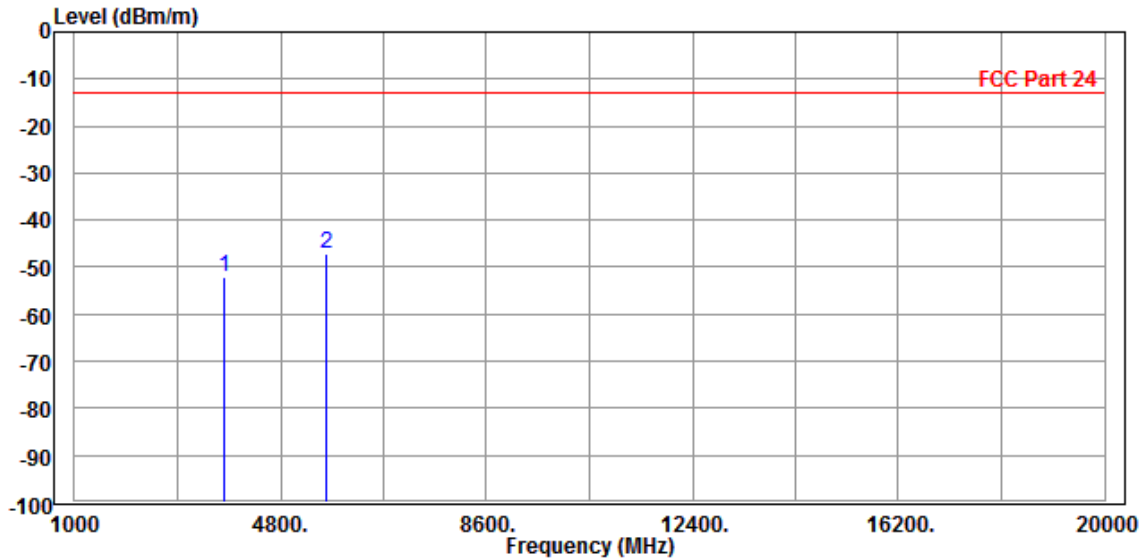

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,  
Houjie Town, Dongguan City,  
Guangdong 523942, China

Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)




LTE Band 2

CHANNEL BANDWIDTH: 1.4MHz / QPSK

<b>MODE</b>	TX channel 18900	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	26deg. C, 56%RH	<b>INPUT POWER</b>	DC 5V from adapter
<b>TESTED BY</b>	Alex Chen		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

	Freq	Level	Read Level	Limit	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3755.000	-52.86	-56.25	-13.00	-39.86	3.39	Peak	Horizontal
2	PP 5640.000	-47.13	-56.25	-13.00	-34.13	9.12	Peak	Horizontal

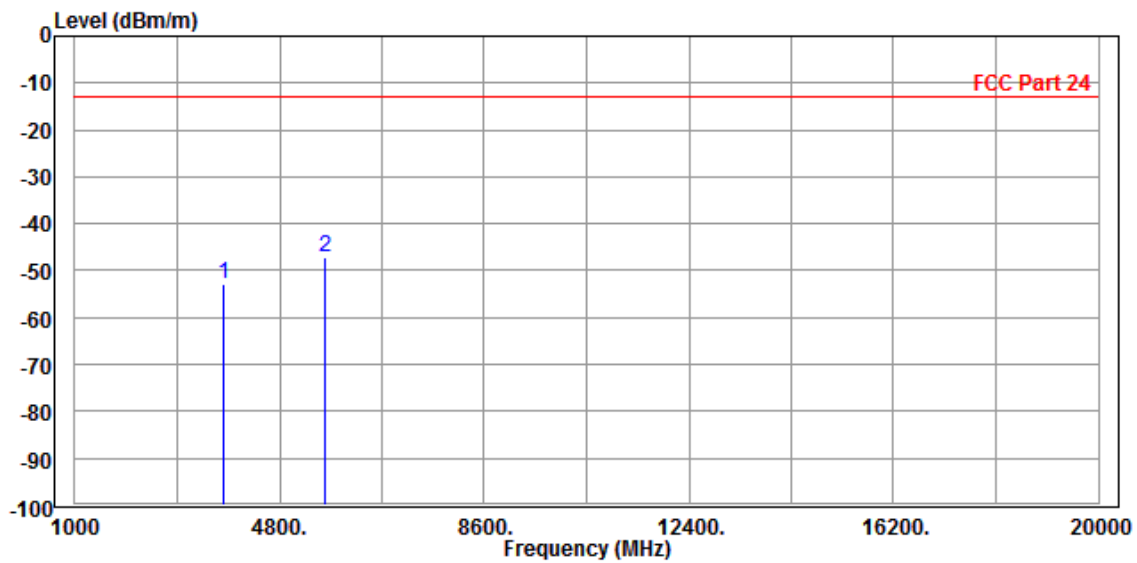






**BUREAU  
VERITAS**

**Test Report No.: RF160816W001-4**

<b>MODE</b>	TX channel 18900	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	26deg. C, 56%RH	<b>INPUT POWER</b>	DC 5V from adapter
<b>TESTED BY</b>	Alex Chen		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3755.000	-52.08	-55.93	-13.00	-39.08	3.85	Peak	Vertical
2	PP 5640.000	-46.88	-55.14	-13.00	-33.88	8.26	Peak	Vertical

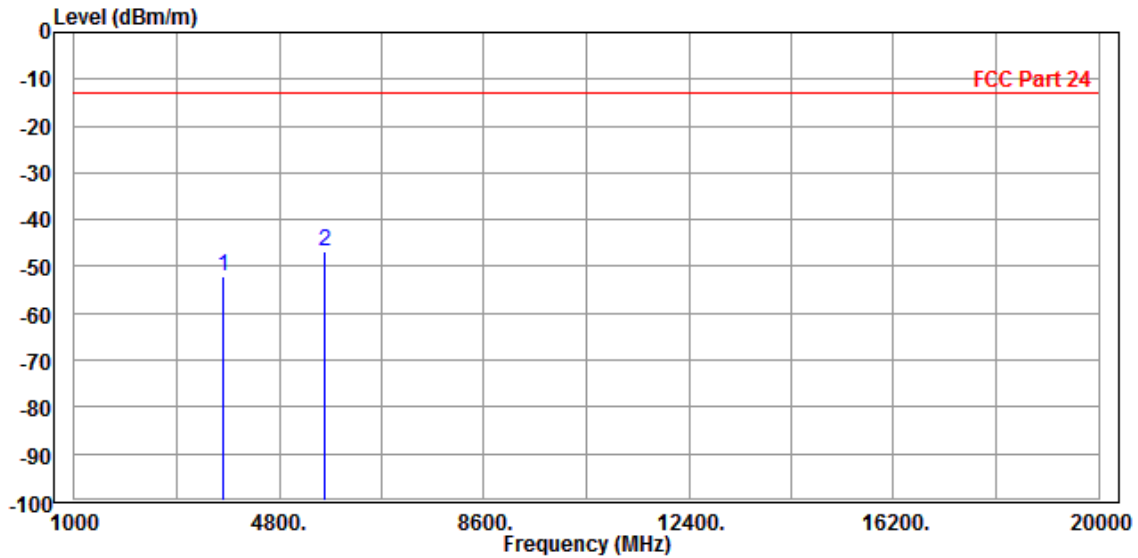

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,  
Houjie Town, Dongguan City,  
Guangdong 523942, China

Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)




BUREAU VERITAS

Test Report No.: RF160816W001-4

CHANNEL BANDWIDTH: 3MHz / QPSK

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	26deg. C, 56%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Alex Chen		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3755.000	-51.47	-54.86	-13.00	-38.47	3.39	Peak	Horizontal
2 PP	5640.000	-48.42	-57.54	-13.00	-35.42	9.12	Peak	Horizontal

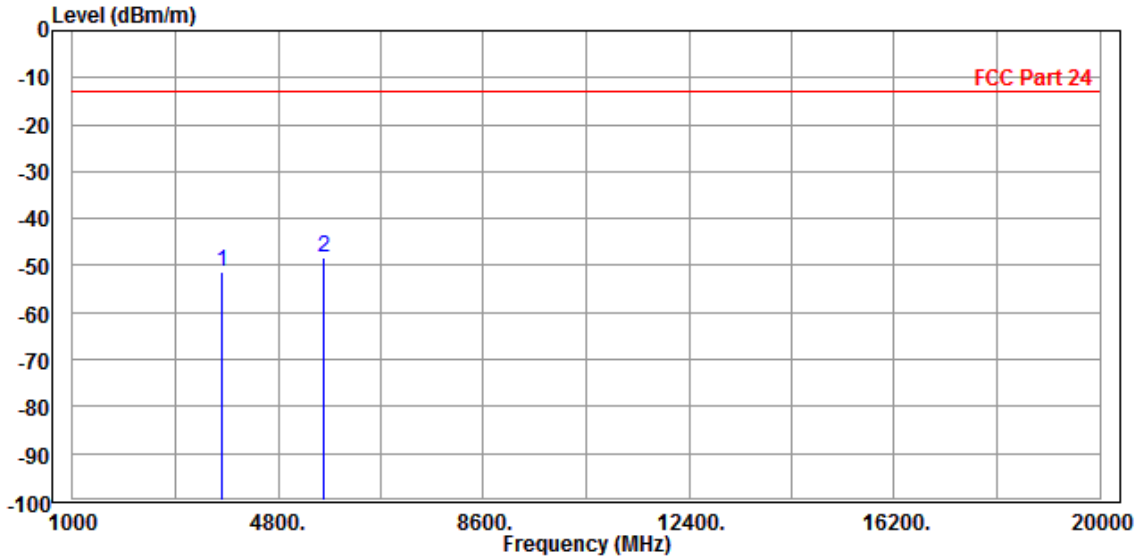




**BUREAU  
VERITAS**

**Test Report No.: RF160816W001-4**

<b>MODE</b>	TX channel 18900	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	26deg. C, 56%RH	<b>INPUT POWER</b>	DC 5V from adapter
<b>TESTED BY</b>	Alex Chen		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3755.000	-51.41	-55.26	-13.00	-38.41	3.85	Peak	Vertical
2 PP	5640.000	-48.79	-57.05	-13.00	-35.79	8.26	Peak	Vertical

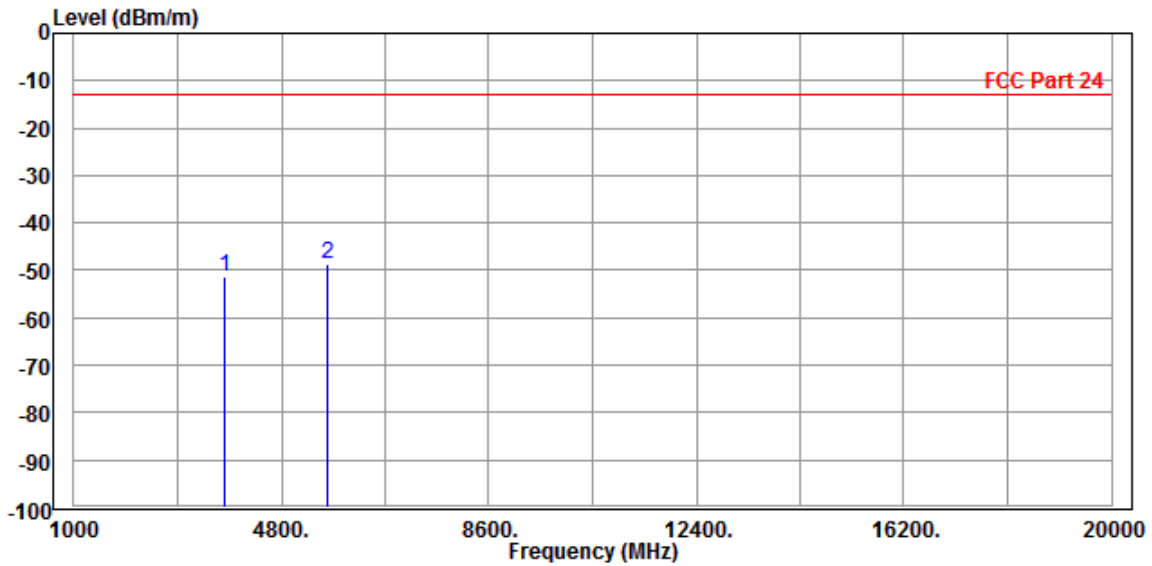

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,  
Houjie Town, Dongguan City,  
Guangdong 523942, China

Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)




BUREAU VERITAS

Test Report No.: RF160816W001-4

CHANNEL BANDWIDTH: 5MHz / QPSK

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	26deg. C, 56%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Alex Chen		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3755.000	-52.87	-56.26	-13.00	-39.87	3.39	Peak	Horizontal
2 PP	5640.000	-48.25	-57.37	-13.00	-35.25	9.12	Peak	Horizontal

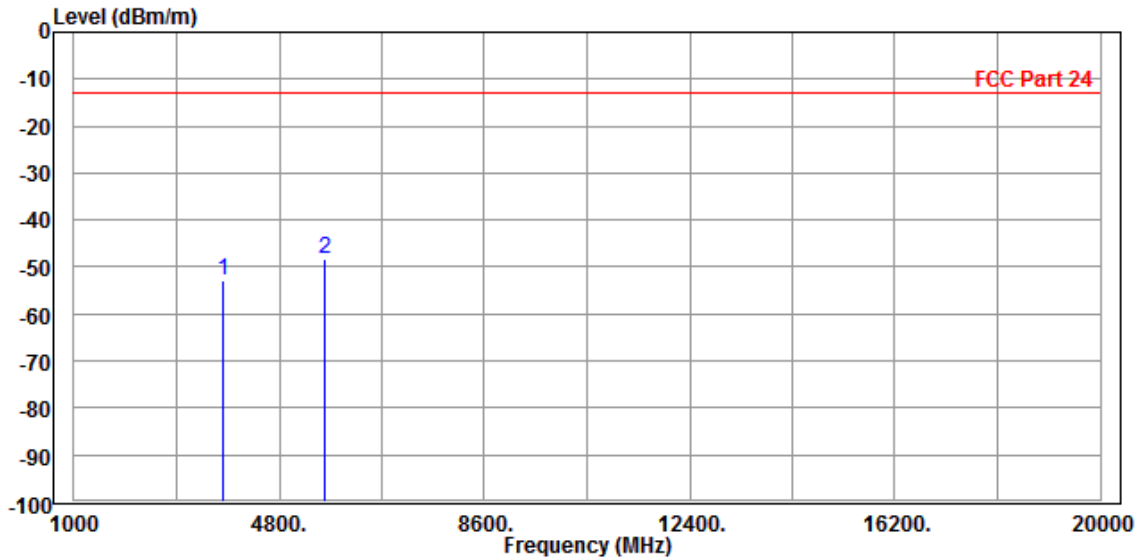




**BUREAU  
VERITAS**

**Test Report No.: RF160816W001-4**

<b>MODE</b>	TX channel 18900	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	26deg. C, 56%RH	<b>INPUT POWER</b>	DC 5V from adapter
<b>TESTED BY</b>	Alex Chen		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3755.000	-51.88	-55.73	-13.00	-38.88	3.85	Peak	Vertical
2 PP	5640.000	-48.22	-56.48	-13.00	-35.22	8.26	Peak	Vertical

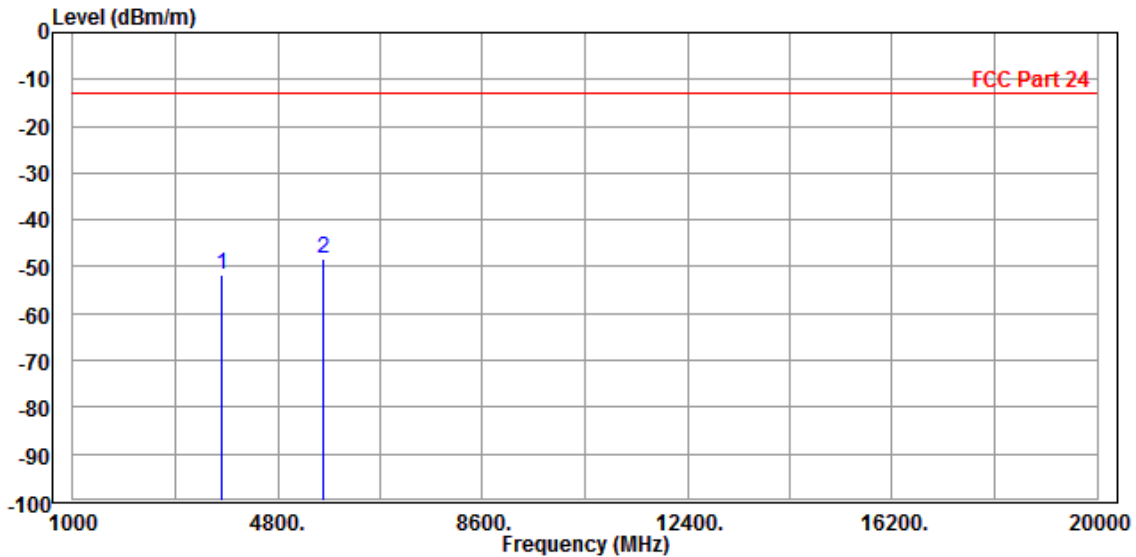

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,  
Houjie Town, Dongguan City,  
Guangdong 523942, China

Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)




**BUREAU  
VERITAS**

**Test Report No.: RF160816W001-4**

**CHANNEL BANDWIDTH: 10MHz / QPSK**

<b>MODE</b>	TX channel 18900	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	26deg. C, 56%RH	<b>INPUT POWER</b>	DC 5V from adapter
<b>TESTED BY</b>	Alex Chen		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3755.000	-51.97	-55.36	-13.00	-38.97	3.39	Peak	Horizontal
2 PP	5640.000	-47.98	-57.10	-13.00	-34.98	9.12	Peak	Horizontal

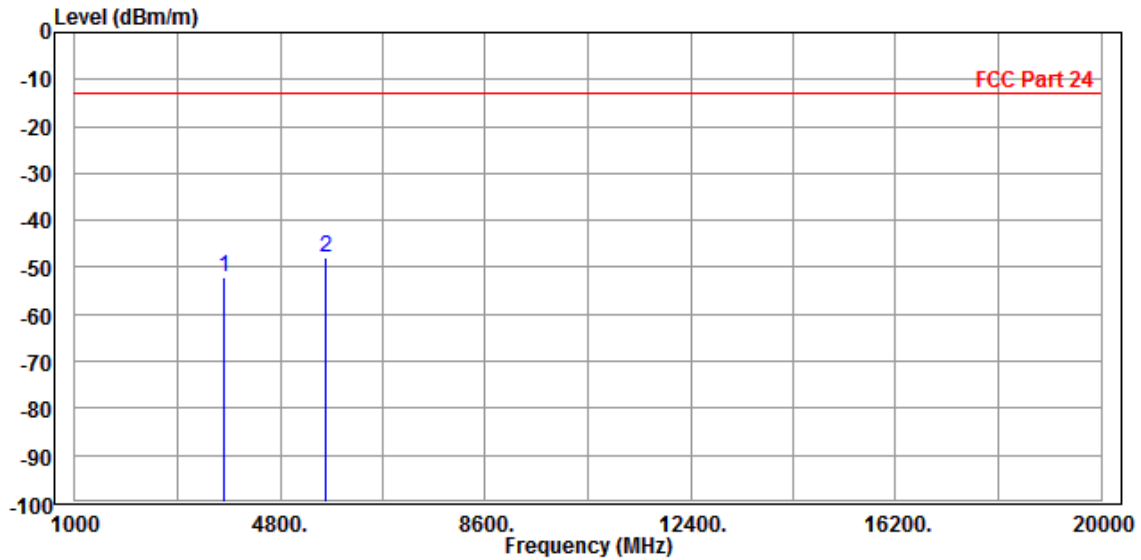




**BUREAU  
VERITAS**

**Test Report No.: RF160816W001-4**

<b>MODE</b>	TX channel 18900	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	26deg. C, 56%RH	<b>INPUT POWER</b>	DC 5V from adapter
<b>TESTED BY</b>	Alex Chen		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3755.000	-49.27	-53.12	-13.00	-36.27	3.85	Peak	Vertical
2	PP 5640.000	-47.94	-56.20	-13.00	-34.94	8.26	Peak	Vertical

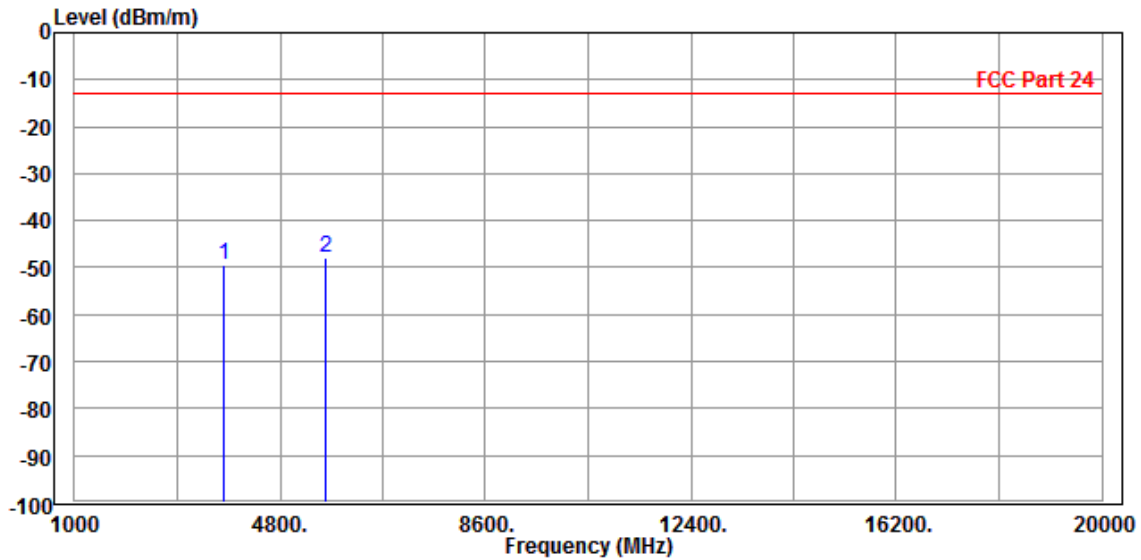




BUREAU VERITAS

Test Report No.: RF160816W001-4

CHANNEL BANDWIDTH: 15MHz / QPSK

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	26deg. C, 56%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Alex Chen		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3755.000	-53.15	-56.54	-13.00	-40.15	3.39	Peak	Horizontal
2 PP	5640.000	-47.63	-56.75	-13.00	-34.63	9.12	Peak	Horizontal

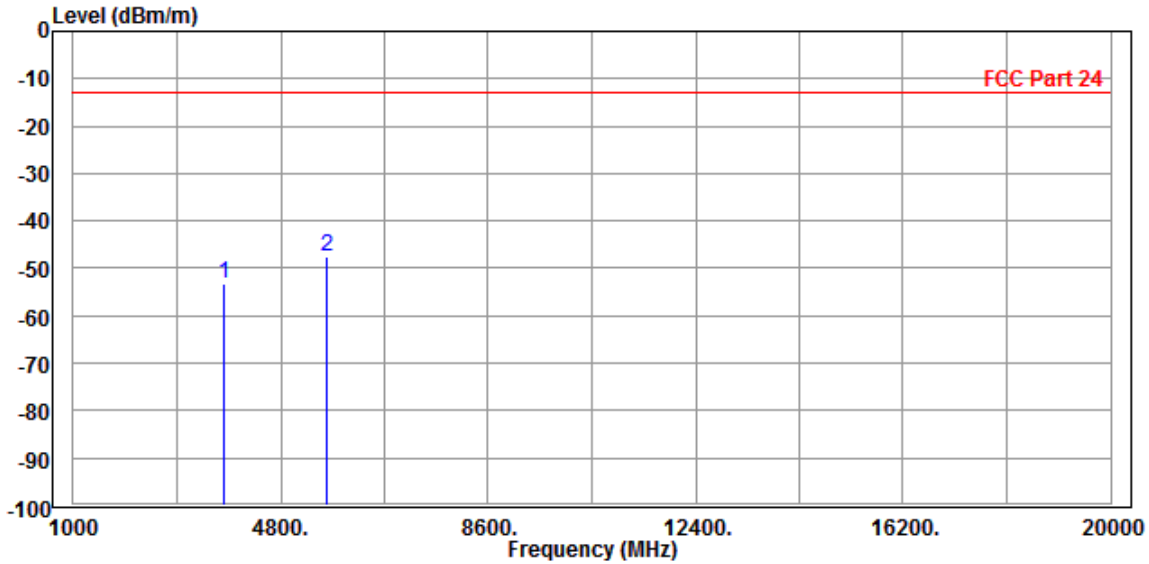






BUREAU VERITAS

Test Report No.: RF160816W001-4

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	26deg. C, 56%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Alex Chen		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3755.000	-51.52	-55.37	-13.00	-38.52	3.85	Peak	Vertical
2	PP 5640.000	-49.05	-57.31	-13.00	-36.05	8.26	Peak	Vertical

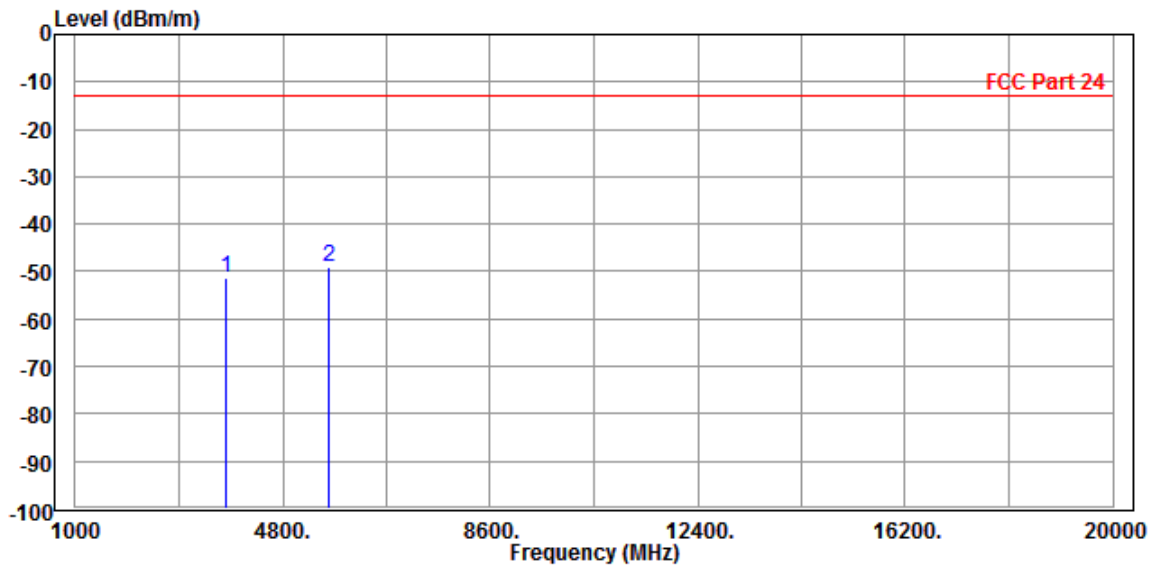

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,  
Houjie Town, Dongguan City,  
Guangdong 523942, China

Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)




BUREAU VERITAS

Test Report No.: RF160816W001-4

CHANNEL BANDWIDTH: 20MHz / QPSK

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	26deg. C, 56%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Alex Chen		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3755.000	-53.60	-56.99	-13.00	-40.60	3.39	Peak	Horizontal
2 PP	5640.000	-48.25	-57.37	-13.00	-35.25	9.12	Peak	Horizontal

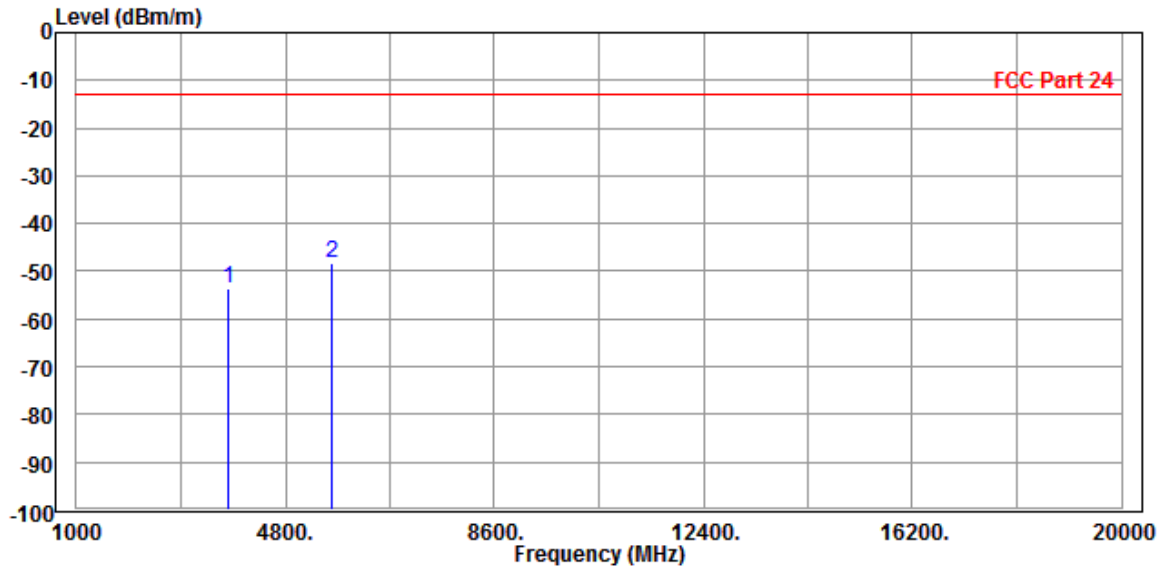




BUREAU VERITAS

Test Report No.: RF160816W001-4

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	26deg. C, 56%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Alex Chen		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3755.000	-52.58	-56.43	-13.00	-39.58	3.85	Peak	Vertical
2 PP	5640.000	-48.91	-57.17	-13.00	-35.91	8.26	Peak	Vertical

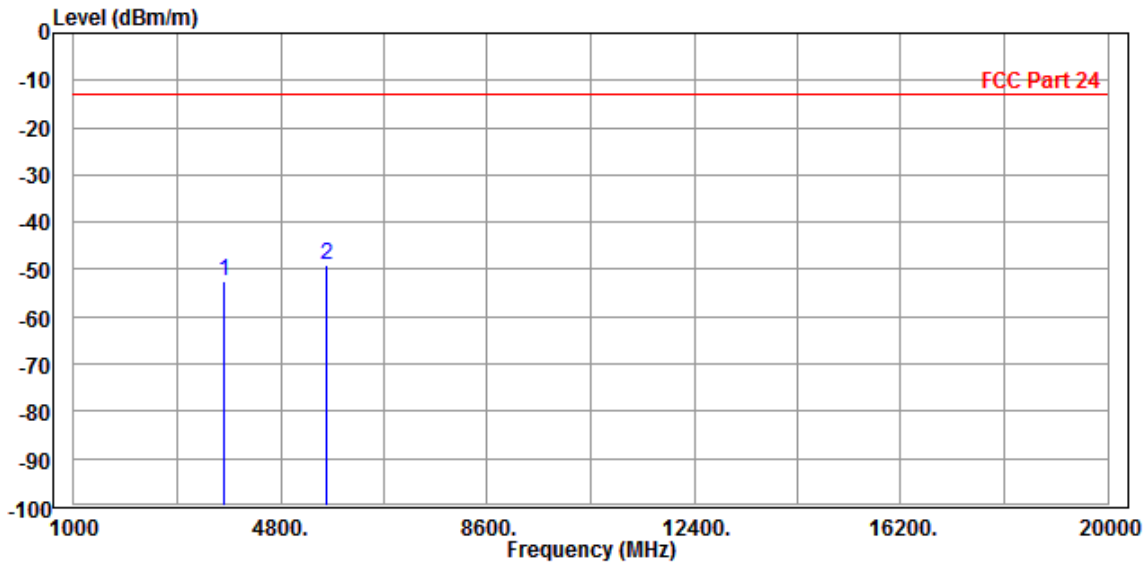

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,  
Houjie Town, Dongguan City,  
Guangdong 523942, China


Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)

## 4.7 PEAK TO AVERAGE RATIO

### 4.7.1 LIMITS OF peak to average ratio MEASUREMENT

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB

### 4.7.2 TEST SETUP

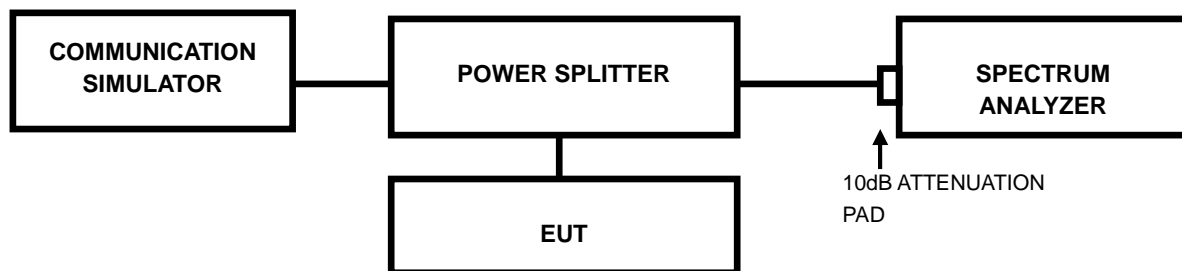


### 4.7.3 TEST PROCEDURES

1. Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1%.

#### 4.7.4 TEST RESULTS

#### GSM

CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
661	1880	2.81

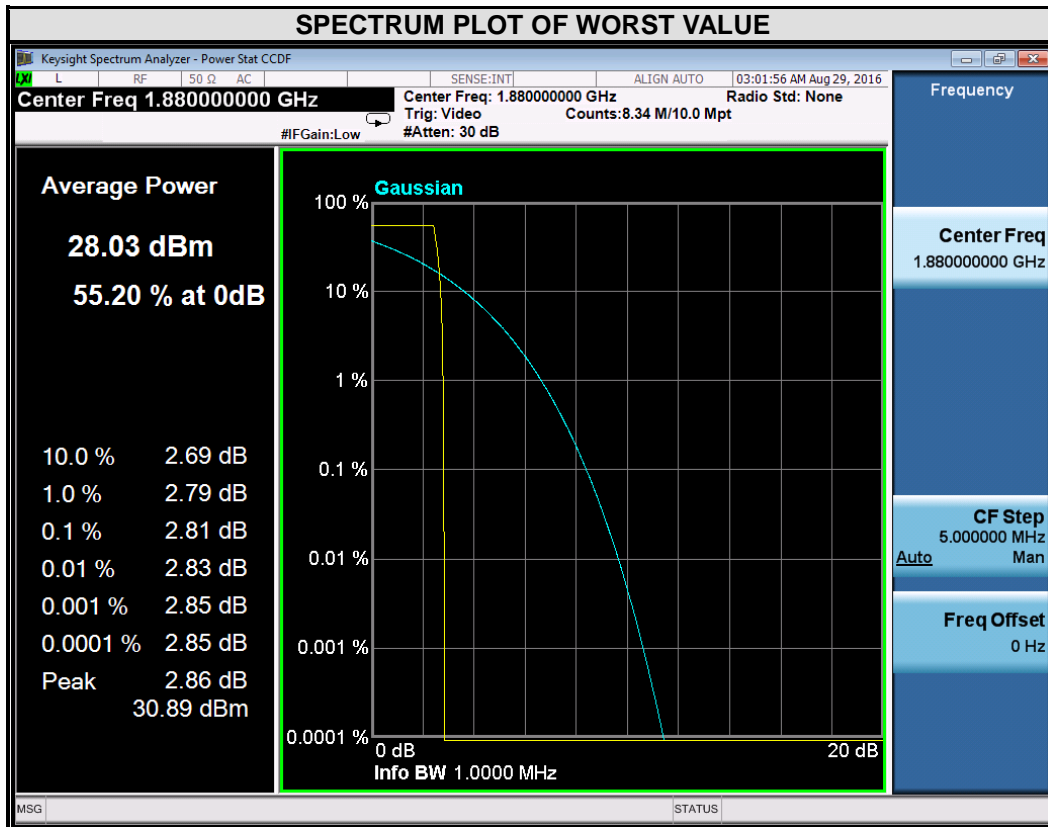




BUREAU VERITAS

Test Report No.: RF160816W001-4

EDGE

CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
661	1880	6.27

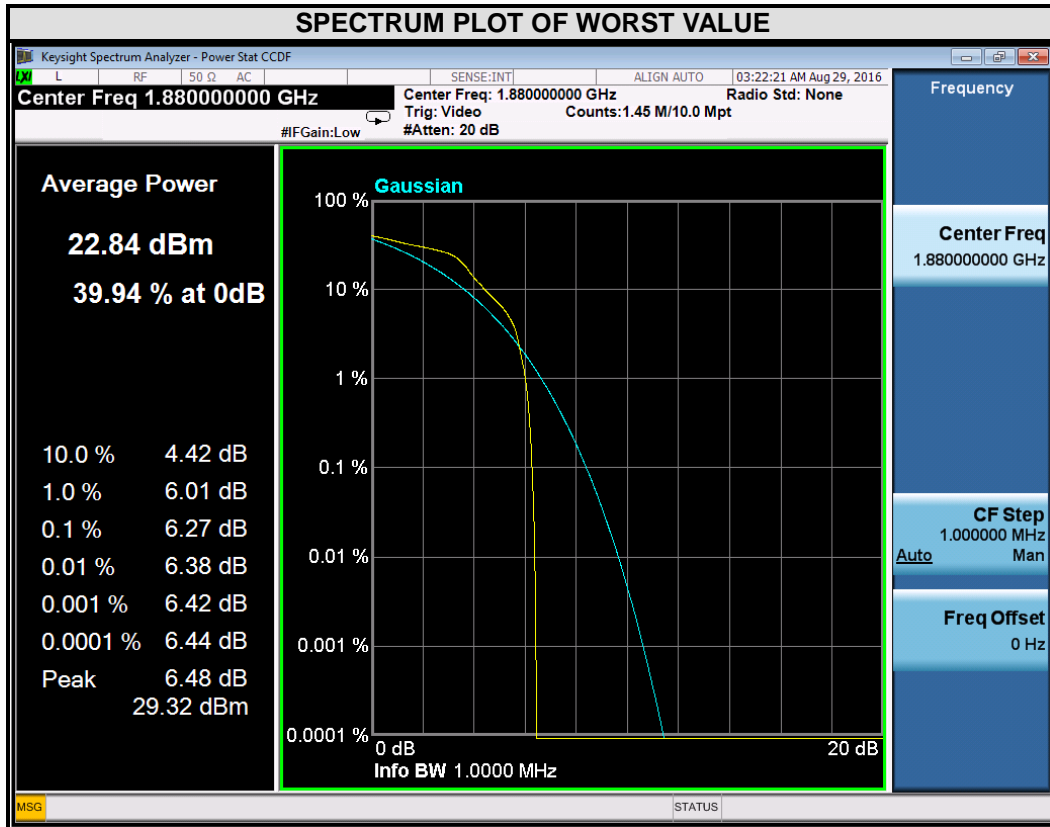




BUREAU VERITAS

Test Report No.: RF160816W001-4

WCDMA

CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
9400	1880	3.08

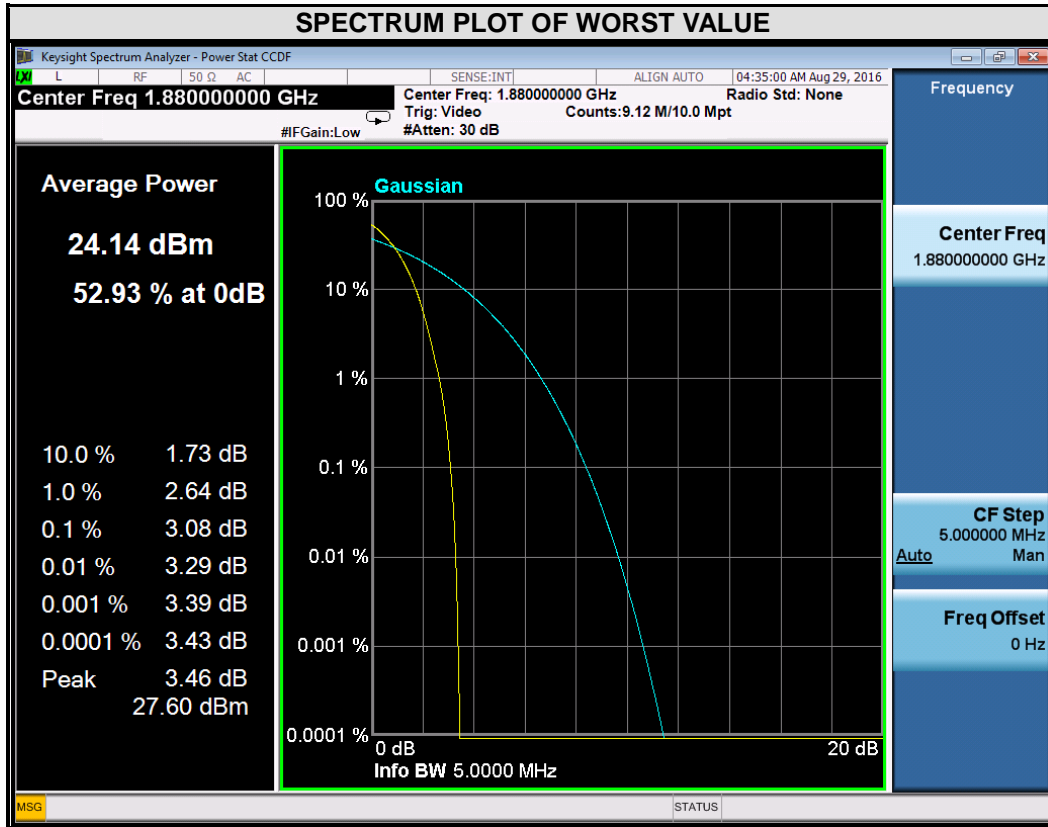




**BUREAU  
VERITAS**

Test Report No.: RF160816W001-4

**LTE BAND 2**

CHANNEL BANDWIDTH: 1.4MHz				CHANNEL BANDWIDTH: 3MHz			
CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)		CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)	
		QPSK	16QAM			QPSK	16QAM
18607	1850.7	4.49	5.43	18615	1851.5	4.72	5.52
18900	1880	4.90	5.72	18900	1880	5.08	5.86
19193	1909.3	4.48	5.45	19185	1908.5	4.82	5.61

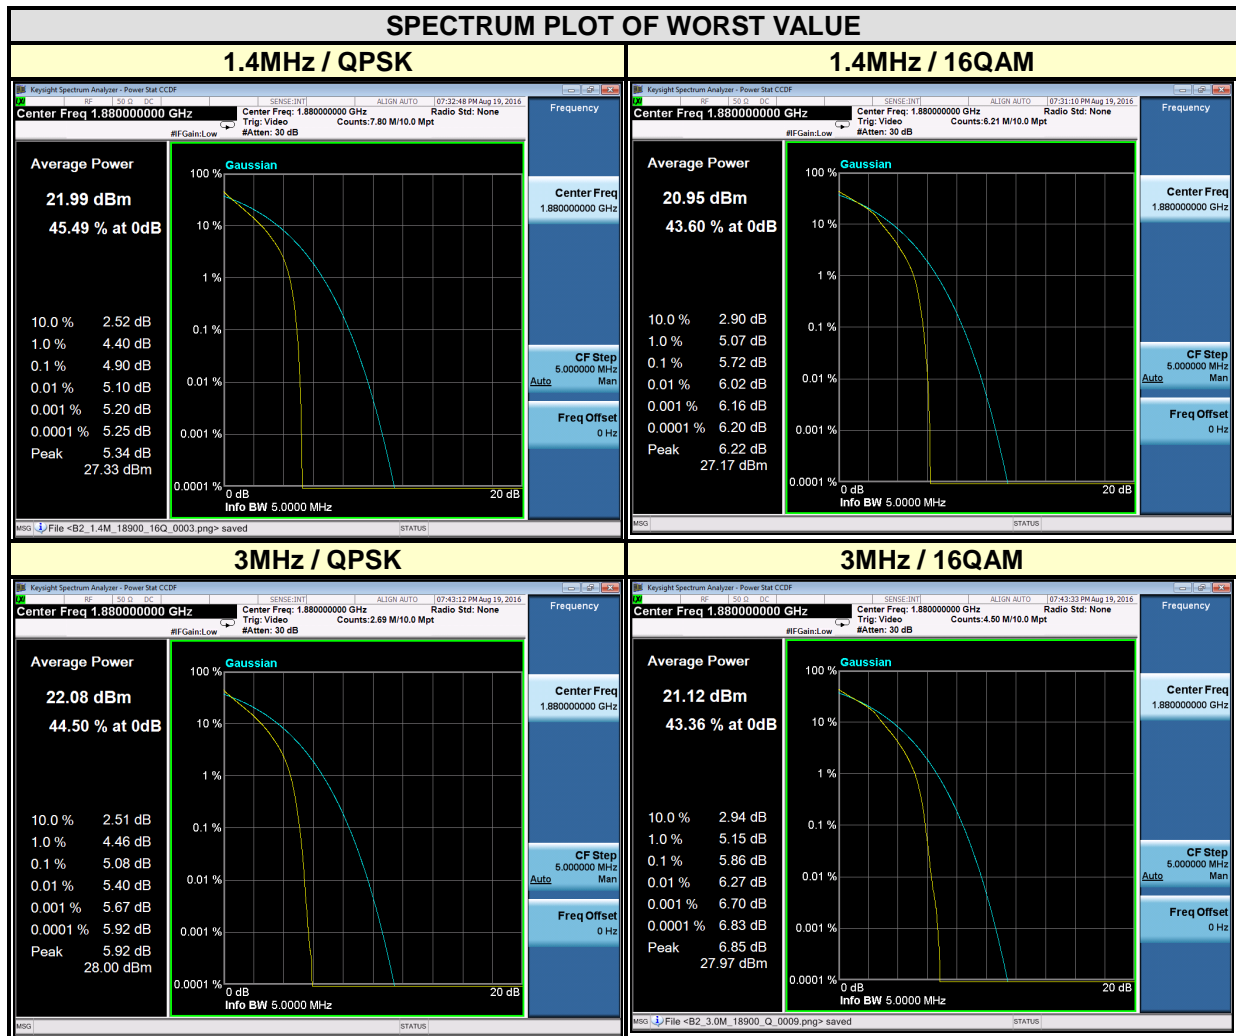

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,  
Houjie Town, Dongguan City,  
Guangdong 523942, China

Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)






BUREAU  
VERITAS

Test Report No.: RF160816W001-4

CHANNEL BANDWIDTH: 5MHz				CHANNEL BANDWIDTH: 10MHz			
CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)		CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)	
		QPSK	16QAM			QPSK	16QAM
18625	1852.5	4.85	5.55	18650	1855	4.89	5.64
18900	1880	5.04	5.83	18900	1880	5.13	5.89
19175	1907.5	4.94	5.77	19150	1905	5.14	5.94

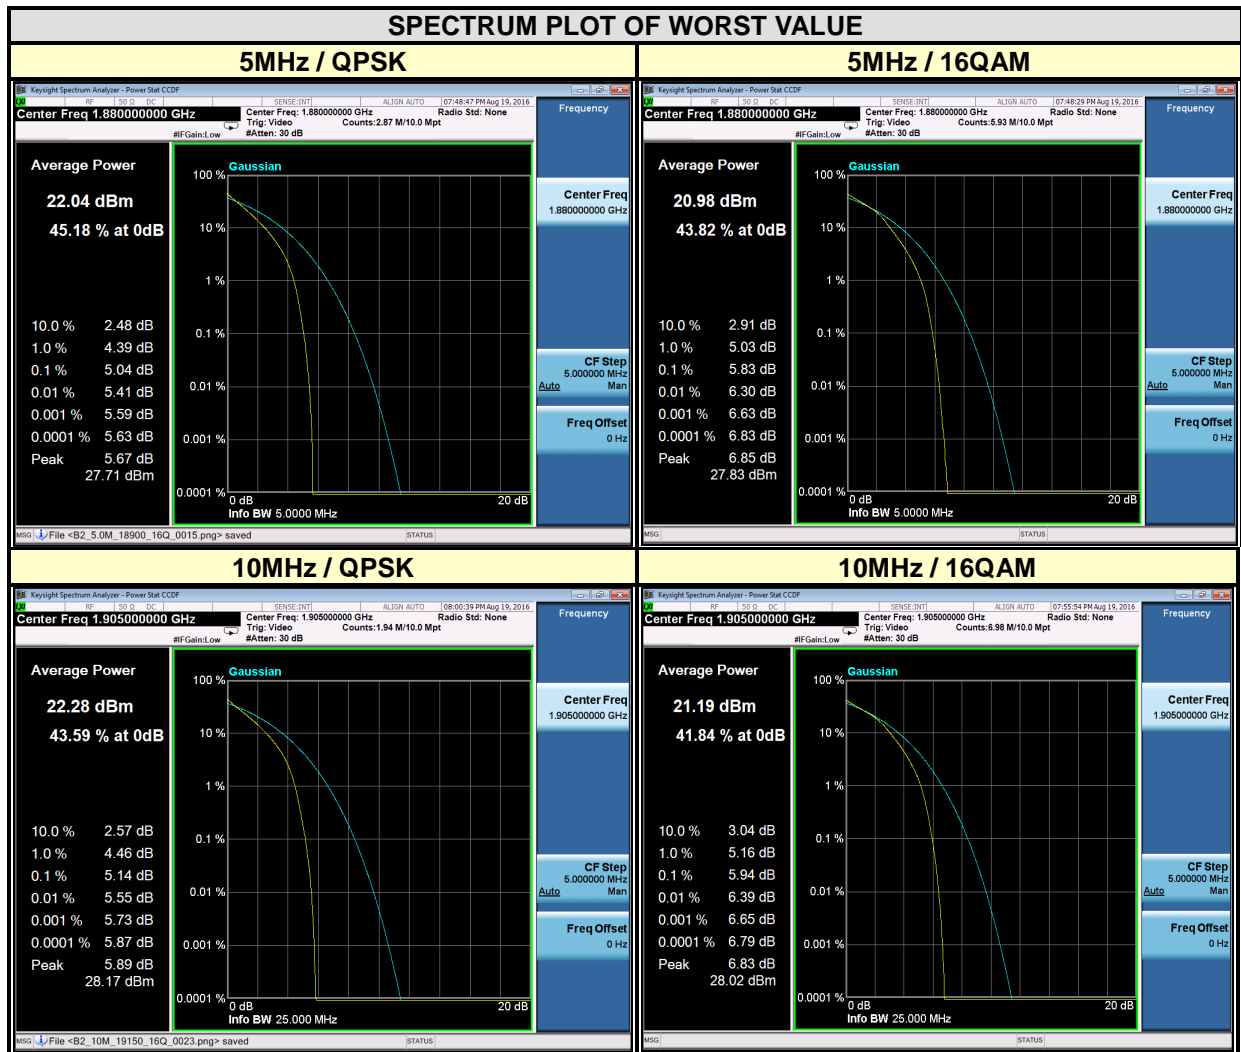

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,  
Houjie Town, Dongguan City,  
Guangdong 523942, China


Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)



**BUREAU  
VERITAS**

Test Report No.: RF160816W001-4

CHANNEL BANDWIDTH: 15MHz				CHANNEL BANDWIDTH: 20MHz			
CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)		CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)	
		QPSK	16QAM			QPSK	16QAM
18675	1857.5	4.94	5.73	18700	1860	5.12	5.87
18900	1880	5.02	5.82	18900	1880	5.10	5.87
19125	1902.5	5.12	5.98	19100	1900	5.24	6.03

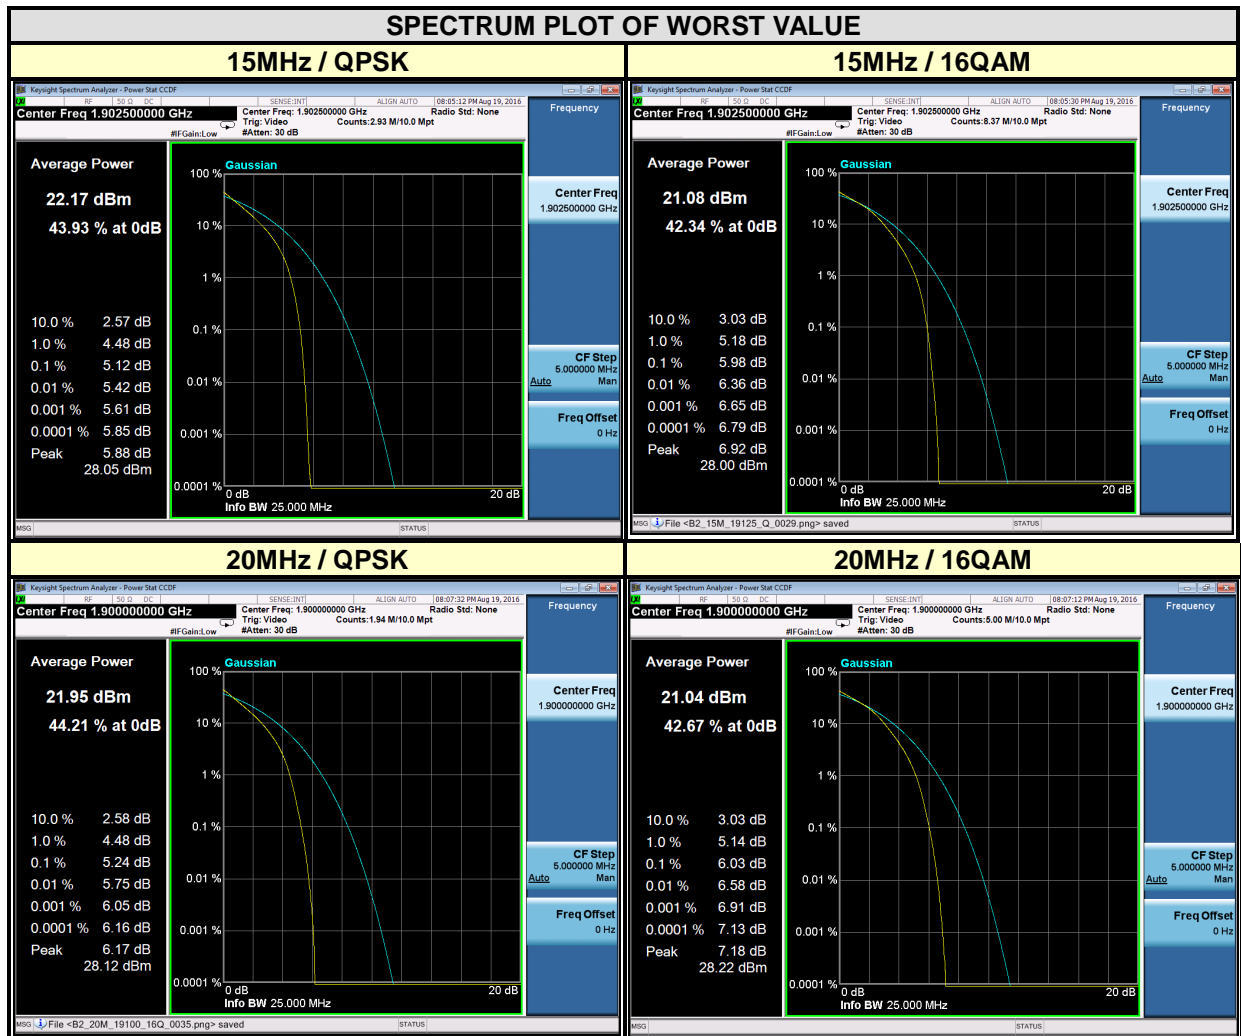

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,  
Houjie Town, Dongguan City,  
Guangdong 523942, China

Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)



**BUREAU  
VERITAS**

Test Report No.: RF160816W001-4

## 5 INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Shenzhen Co., Ltd. Dongguan Branch, were founded in 2002 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Dongguan EMC/RF Lab:**

Tel: +86-769-85935656

Fax: +86-769-85931080

**Email:** [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)

**Web Site:** [www.adt.com.tw](http://www.adt.com.tw)

The address and road map of all our labs can be found in our web site also.



**BUREAU**  
**VERITAS**

Test Report No.: RF160816W001-4

## **6 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB**

No any modifications are made to the EUT by the lab during the test.

**---END---**