



Test Report No.: RF160816W001-5



# FCC TEST REPORT (PART 27)

**Product:** smartphone  
**Model Name:** Ilium L1300  
**FCC ID:** ZC4L1300  
**Applicant:** Corporativo Lanix S.A. de C.V.  
**Address:** Carretera Internacional Hermosillo-Nogales Km 8.5, Hermosillo  
Sonora, Mexico  
**Manufacturer:** Tinno Mobile Technology Corp.  
**Address:** 4/F., H-3 Building, OCT Eastern Industrial Park. NO.1 XiangShan  
East Road., Nan Shan District, Shenzhen, P.R.China.  
**Prepared by:** Bureau Veritas Shenzhen Co., Ltd. Dongguan Branch  
**Lab Location:** No. 34, Chenwulu Section, Guantai Rd., Houjie Town, Dongguan  
City, Guangdong 523942, China  
**TEL:** +86 769 8593 5656  
**FAX:** +86 769 8593 1080  
**E-MAIL:** [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)  
**Report No.:** RF160816W001-5  
**Received Date:** Aug. 16, 2016  
**Test Date:** Aug. 17, 2016 ~ Aug. 31, 2016  
**Issued Date:** Sep. 01, 2016

This report should not be used by the client to claim product certification, approval, or endorsement by A2LA or any government agencies.

This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,  
Houjie Town, Dongguan City,  
Guangdong 523942, China

Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)



# TABLE OF CONTENTS

**RELEASE CONTROL RECORD ..... 4**

**1 CERTIFICATION ..... 5**

**2 SUMMARY OF TEST RESULTS ..... 6**

2.1 MEASUREMENT UNCERTAINTY ..... 6

2.2 TEST SITE AND INSTRUMENTS ..... 7

**3 GENERAL INFORMATION..... 8**

3.1 GENERAL DESCRIPTION OF EUT ..... 8

3.2 CONFIGURATION OF SYSTEM UNDER TEST .....11

3.3 DESCRIPTION OF SUPPORT UNITS ..... 12

3.4 DESCRIPTION OF TEST MODES..... 12

3.5 GENERAL DESCRIPTION OF APPLIED STANDARDS ..... 16

**4 TEST TYPES AND RESULTS ..... 17**

4.1 OUTPUT POWER MEASUREMENT ..... 17

4.1.1 LIMITS OF OUTPUT POWER MEASUREMENT ..... 17

4.1.2 TEST PROCEDURES ..... 17

4.1.3 TEST SETUP ..... 18

4.1.4 TEST RESULTS ..... 19

4.2 FREQUENCY STABILITY MEASUREMENT ..... 29

4.2.1 LIMITS OF FREQUENCY STABILIIITY MEASUREMENT..... 29

4.2.2 TEST PROCEDURE ..... 29

4.2.3 TEST SETUP ..... 29

4.2.4 TEST RESULTS ..... 30

4.3 OCCUPIED BANDWIDTH MEASUREMENT ..... 32

4.3.1 LIMITS OF OCCUPIED BANDWIDTH MEASUREMENT ..... 32

4.3.2 TEST SETUP ..... 32

4.3.3 TEST PROCEDURES ..... 32

4.3.4 TEST RESULTS ..... 33

4.4 PEAK TO AVERAGE RATIO ..... 37

4.4.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT ..... 37

4.4.2 TEST SETUP ..... 37

4.4.3 TEST PROCEDURES ..... 37

4.4.4 TEST RESULTS ..... 38

4.5 BAND EDGE MEASUREMENT ..... 42

4.5.1 LIMITS OF BAND EDGE MEASUREMENT ..... 42

4.5.2 TEST SETUP ..... 42

4.5.3 TEST PROCEDURES ..... 43

4.5.4 TEST RESULTS ..... 44

4.6 CONDUCTED SPURIOUS EMISSIONS..... 52

4.6.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT ..... 52

4.6.2 TEST PROCEDURE ..... 52

4.6.3 TEST SETUP ..... 52

4.6.4 TEST RESULTS ..... 53

4.7 RADIATED EMISSION MEASUREMENT ..... 55

4.7.1 LIMITS OF RADIATED EMISSION MEASUREMENT ..... 55

4.7.2 TEST PROCEDURES ..... 55

4.7.3 DEVIATION FROM TEST STANDARD ..... 55



**BUREAU  
VERITAS**

**Test Report No.: RF160816W001-5**

4.7.4	TEST SETUP .....	56
4.7.5	TEST RESULTS .....	57
<b>5</b>	<b>INFORMATION ON THE TESTING LABORATORIES .....</b>	<b>75</b>
<b>6</b>	<b>APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB .....</b>	<b>76</b>



Test Report No.: RF160816W001-5

## RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF160816W001-5	Original release	Sep. 01, 2016



Test Report No.: RF160816W001-5

## 1 CERTIFICATION

**PRODUCT:** smartphone  
**BRAND NAME:** LANIX  
**MODEL NAME:** Ilium L1300  
**APPLICANT:** Corporativo Lanix S.A. de C.V.  
**TESTED:** Aug. 17, 2016 ~ Aug. 31, 2016  
**TEST SAMPLE:** Identical Prototype  
**TEST STANDARDS:** **FCC Part 27, Subpart C, L**  
**FCC Part 2**  
**ANSI/TIE/EIA-603-D**

The above equipment has been tested by **Bureau Veritas Shenzhen Co., Ltd. Dongguan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**PREPARED BY :** Yuqiang Yin , **DATE:** Sep. 01, 2016  
(Yuqiang Yin/ Engineer)

**APPROVED BY :** Bill Yao , **DATE:** Sep. 01, 2016  
( Bill Yao / Manager)

## 2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 27 & Part 2			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
2.1046 27.50(d)(4)	Maximum Peak Output Power	PASS	Meet the requirement of limit.
2.1055 27.54	Frequency Stability	PASS	Meet the requirement of limit.
2.1049 27.53(h)	Occupied Bandwidth	PASS	Meet the requirement of limit.
27.50(d)(5)	Peak to average ratio	PASS	Meet the requirement of limit.
27.53(h)	Band Edge Measurements	PASS	Meet the requirement of limit.
2.1051 27.53(h)	Conducted Spurious Emissions	PASS	Meet the requirement of limit.
2.1053 27.53(h)	Radiated Spurious Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -14.35dB at 30.97MHz.

### 2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.66dB
Radiated emissions	9KHz ~ 30MHz	2.74dB
	30MHz ~ 1GMHz	3.55dB
	1GHz ~ 18GHz	4.84dB
	18GHz ~ 40GHz	1.94dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



## 2.2 TEST SITE AND INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR7	101494	Apr. 05,16	Apr. 04,17
10dB Attenuator	JFW/USA	50HF-010-SMA	1505	Jul. 27, 16	Jul. 26, 17
Signal and Spectrum Analyzer	Rohde&Schwarz	FSV7	102331	Nov. 09,15	Nov. 08,16
Bilog Antenna 1	Teseq	CBL 6111D	30643	Jul. 14, 16	Jul. 13, 17
Bilog Antenna 2	Teseq	CBL 6111D	27089	Jul. 14, 16	Jul. 13, 17
Horn Antenna (1GHz -18GHz)	ETS -Lindgren	3117	00062558	May 18,16	May 17,17
GPS Generator+ Antenna	TOJOIN	GNSS-5000A	E1-010119	Aug. 02, 15	Aug. 01, 17
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	NSEMC003	Mar. 12,16	Mar. 11,18
Test Software	ADT	ADT_Radiated_V7.6.15.9.2	N/A	N/A	N/A
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170242	Mar. 12,16	Mar. 11,17
Amplifier (9kHz-1GHz)	SONOMA	310D	186955	Mar. 04,16	Mar. 03, 17
Pre-Amplifier(1-18G)	HP	8449B	3008A00409	Apr. 25,16	Apr. 24,17
Pre-Amplifier (18GHz-40GHz)	EMCI	EMC 184045	980102	Nov. 20,15	Nov. 19,16
Test Software	ADT	ADT_Radiated_V7.6.15.9.2	N/A	N/A	N/A
BLUETOOTH TESTER	Rohde&Schwarz	CBT32	100811	Aug. 29,16	Aug. 28,17
Power Sensor	Keysight	U2021XA	MY55060016	May 04,16	May 03,17
Power Sensor	Keysight	U2021XA	MY55060018	May 04,16	May 03,17
Digital Multimeter	FLUKE	15B	A1220010DG	Oct. 12, 15	Oct.11, 16
Humid & Temp Programmable Tester	Haida	HD-2257	110807201	Sep.07,15	Sep. 06,16
Oscilloscope	Agilent	DSO9254A	MY51260160	Nov. 28,15	Nov. 27,16
Signal Analyzer	Rohde Schwarz &	FSV7	102331	Nov. 09,15	Nov. 08,16
Signal Generator	Agilent	N5183A	MY50140980	Nov. 09,15	Nov. 08,16
ESG Vector Signal Generator	Agilent	E4438C	MY49072505	Apr. 22, 16	Apr. 21, 17
BLUETOOTH TESTER	Rohde&Schwarz	CBT32	100811	Aug. 29,16	Aug. 28,17

- NOTE:**
1. The calibration interval of the above test instruments is 12 months or 24 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
  2. The test was performed in Dongguan 966 Chamber.
  3. The horn antenna are used only for the measurement of emission frequency above 1GHz if tested.
  4. The FCC Site Registration No. is 502831.



### 3 GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

<b>PRODUCT</b>	smartphone	
<b>BRAND NAME</b>	LANIX	
<b>MODEL NAME</b>	Ilium L1300	
<b>POWER SUPPLY</b>	5.0Vdc (adapter or host equipment) 3.85Vdc (battery)	
<b>MODULATION TECHNOLOGY</b>	<b>LTE</b>	QPSK, 16QAM
<b>FREQUENCY RANGE</b>	<b>LTE Band 4 Channel Bandwidth: 1.4MHz</b>	1710.7MHz ~ 1754.3MHz
	<b>LTE Band 4 Channel Bandwidth: 3MHz</b>	1711.5MHz ~ 1753.5MHz
	<b>LTE Band 4 Channel Bandwidth: 5MHz</b>	1712.5MHz ~ 1752.5MHz
	<b>LTE Band 4 Channel Bandwidth: 10MHz</b>	1715.0MHz ~ 1750.0MHz
	<b>LTE Band 4 Channel Bandwidth: 15MHz</b>	1717.5MHz ~ 1747.5MHz
	<b>LTE Band 4 Channel Bandwidth: 20MHz</b>	1720.0MHz ~ 1745.0MHz
	<b>LTE Band 17 Channel Bandwidth: 5MHz</b>	706.5MHz ~ 713.5MHz
	<b>LTE Band 17 Channel Bandwidth: 10MHz</b>	709.0MHz ~ 711.0MHz
<b>EMISSION DESIGNATOR</b>	<b>LTE Band 4 Channel Bandwidth: 1.4MHz</b>	QPSK: 1M09G7D 16QAM: 1M08W7D
	<b>LTE Band 4 Channel Bandwidth: 3MHz</b>	QPSK: 2M68G7D 16QAM: 2M68W7D
	<b>LTE Band 4 Channel Bandwidth: 5MHz</b>	QPSK: 4M48G7D 16QAM: 4M47W7D
	<b>LTE Band 4 Channel Bandwidth: 10MHz</b>	QPSK: 8M92G7D 16QAM: 8M93W7D
	<b>LTE Band 4 Channel Bandwidth: 15MHz</b>	QPSK: 13M4G7D 16QAM: 13M4W7D
	<b>LTE Band 4 Channel Bandwidth: 20MHz</b>	QPSK: 17M9G7D 16QAM: 17M8W7D
	<b>LTE Band 17 Channel Bandwidth: 5MHz</b>	QPSK: 4M48G7D 16QAM: 4M47W7D
	<b>LTE Band 17 Channel Bandwidth: 10MHz</b>	QPSK: 8M90G7D 16QAM: 8M90W7D





BUREAU  
VERITAS

Test Report No.: RF160816W001-5

<b>MAX. ERP/EIRP POWER</b>	<b>LTE Band 4 Channel Bandwidth: 1.4MHz</b>	399mW
	<b>LTE Band 4 Channel Bandwidth: 3MHz</b>	417mW
	<b>LTE Band 4 Channel Bandwidth: 5MHz</b>	433mW
	<b>LTE Band 4 Channel Bandwidth: 10MHz</b>	455mW
	<b>LTE Band 4 Channel Bandwidth: 15MHz</b>	426mW
	<b>LTE Band 4 Channel Bandwidth: 20MHz</b>	346mW
	<b>LTE Band 17 Channel Bandwidth: 5MHz</b>	72mW
	<b>LTE Band 17 Channel Bandwidth: 10MHz</b>	66mW
<b>ANTENNA TYPE</b>	<b>LTE Band 4</b>	Fixed Internal with 0dBi
	<b>LTE Band 17</b>	Fixed Internal with -0.5dBi
<b>HW VERSION</b>	V1.0	
<b>SW VERSION</b>	Ilium L1300_TELCEL_SW_01	
<b>ACCESSORY DEVICE</b>	Refer to note as below	
<b>DATA CABLE</b>	USB cable: non-shielded, detachable, 0.8m Earphone cable: non-shielded, detachable, 1.5m	

**NOTE:**

- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
- The EUT was powered by the following adapter:

<b>ADAPTER</b>	
<b>BRAND:</b>	LANIX
<b>MODEL:</b>	Ilium L1300-C
<b>INPUT:</b>	AC 100-240V, 500mA
<b>OUTPUT:</b>	DC 5V, 3000mA DC 9V, 2000mA DC 12V, 1500mA

- The EUT matched the following USB cable and Earphone:

<b>USB CABLE</b>	
<b>BRAND:</b>	LANIX
<b>MODEL:</b>	Ilium L1300
<b>SIGNAL LINE:</b>	0.8 METER



**BUREAU  
VERITAS**


**Test Report No.: RF160816W001-5**

<b>EARPHONE</b>	
<b>RAND:</b>	LANIX
<b>MODEL:</b>	Ilium L1300
<b>SIGNAL LINE:</b>	1.5 METER


4. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.

### 3.2 CONFIGURATION OF SYSTEM UNDER TEST

#### FOR RADIATION EMISSION TEST

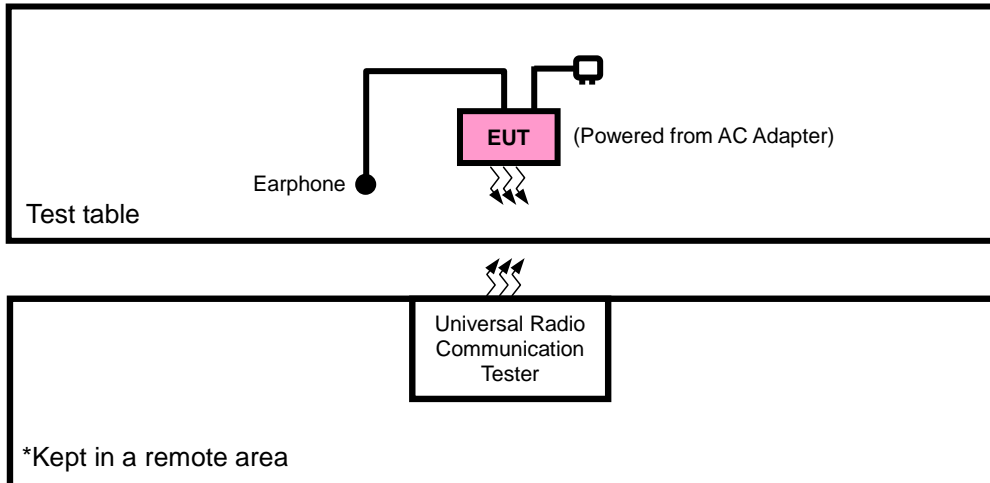

#### FOR E.R.P./E.I.R.P TEST

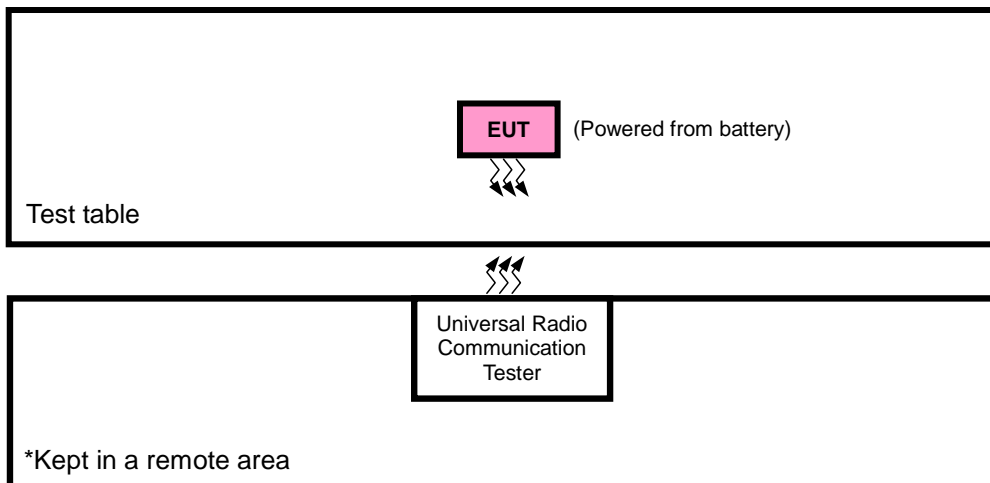



### 3.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	DC source	LONG WEI	PS-6403D	010934269	N/A
2	PC	HP	A6608CN	3CR83825X3	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	DC Line: Unshielded, Detachable 1.0m
2	AC Line: Unshielded, Detachable 1.5m

**NOTE:**

- 1. All power cords of the above support units are non shielded (1.8m).

### 3.4 DESCRIPTION OF TEST MODES

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case was found when positioned on X-plane for ERP/EIRP and X-axis for radiated emission. Following channel(s) was (were) selected for the final test as listed below:

EUT CONFIGURE MODE	DESCRIPTION
-	EUT with LTE link



Test Report No.: RF160816W001-5

**LTE BAND 4**

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE
-	EIRP	19957 to 20393	19957, 20175, 20393	1.4MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		19965 to 20385	19965, 20175, 20385	3MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		19975 to 20375	19975, 20175, 20375	5MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		20000 to 20350	20000, 20175, 20350	10MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		20025 to 20325	20025, 20175, 20325	15MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		20050 to 20300	20050, 20175, 20300	20MHz	QPSK, 16QAM	1 RB / 0 RB Offset
-	FREQUENCY STABILITY	19957 to 20393	20175	1.4MHz	QPSK	1 RB / 0 RB Offset
		19965 to 20385	20175	3MHz	QPSK	1 RB / 0 RB Offset
		19975 to 20375	20175	5MHz	QPSK	1 RB / 0 RB Offset
		20000 to 20350	20175	10MHz	QPSK	1 RB / 0 RB Offset
		20025 to 20325	20175	15MHz	QPSK	1 RB / 0 RB Offset
		20050 to 20300	20175	20MHz	QPSK	1 RB / 0 RB Offset
-	OCCUPIED BANDWIDTH	19957 to 20393	19957, 20175, 20393	1.4MHz	QPSK, 16QAM	6 RB / 0 RB Offset
		19965 to 20385	19965, 20175, 20385	3MHz	QPSK, 16QAM	15 RB / 0 RB Offset
		19975 to 20375	19975, 20175, 20375	5MHz	QPSK, 16QAM	25 RB / 0 RB Offset
		20000 to 20350	20000, 20175, 20350	10MHz	QPSK, 16QAM	50 RB / 0 RB Offset
		20025 to 20325	20025, 20175, 20325	15MHz	QPSK, 16QAM	75 RB / 0 RB Offset
		20050 to 20300	20050, 20175, 20300	20MHz	QPSK, 16QAM	100 RB / 0 RB Offset
-	PEAK TO AVERAGE RATIO	19957 to 20393	19957, 20175, 20393	1.4MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		19965 to 20385	19965, 20175, 20385	3MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		19975 to 20375	19975, 20175, 20375	5MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		20000 to 20350	20000, 20175, 20350	10MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		20025 to 20325	20025, 20175, 20325	15MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		20050 to 20300	20050, 20175, 20300	20MHz	QPSK, 16QAM	1 RB / 0 RB Offset
-	BAND EDGE	19957 to 20393	19957	1.4MHz	QPSK	1 RB / 0 RB Offset
			20393	1.4MHz	QPSK	6 RB / 0 RB Offset
		19965 to 20385	19965	3MHz	QPSK	1 RB / 5 RB Offset
			20385	3MHz	QPSK	6 RB / 0 RB Offset
		19975 to 20375	19965	3MHz	QPSK	1 RB / 0 RB Offset
			20385	3MHz	QPSK	15 RB / 0 RB Offset
		19975 to 20375	19975	5MHz	QPSK	1 RB / 14 RB Offset
			20375	5MHz	QPSK	15 RB / 0 RB Offset
		20000 to 20350	19975	5MHz	QPSK	1 RB / 0 RB Offset
			20375	5MHz	QPSK	25 RB / 0 RB Offset
		20000 to 20350	20000	10MHz	QPSK	1 RB / 24 RB Offset
			20350	10MHz	QPSK	25 RB / 0 RB Offset
20000 to 20350	20000	10MHz	QPSK	1 RB / 0 RB Offset		
	20350	10MHz	QPSK	50 RB / 0 RB Offset		
20000 to 20350	20000	10MHz	QPSK	1 RB / 0 RB Offset		
	20350	10MHz	QPSK	50 RB / 49 RB Offset		
20000 to 20350	20000	10MHz	QPSK	1 RB / 0 RB Offset		
	20350	10MHz	QPSK	50 RB / 0 RB Offset		

-	BAND EDGE	20025 to 20325	20025	15MHz	QPSK	1 RB / 0 RB Offset
						75 RB / 0 RB Offset
		20050 to 20300	20325	15MHz	QPSK	1 RB / 74 RB Offset
						75 RB / 0 RB Offset
			20050	20MHz	QPSK	1 RB / 0 RB Offset
						100 RB / 0 RB Offset
		20300	20MHz	QPSK	1 RB / 99 RB Offset	
					100 RB / 0 RB Offset	
-	CONDCUDETED EMISSION	19957 to 20393	20175	1.4MHz	QPSK	1 RB / 0 RB Offset
		19965 to 20385	20175	3MHz	QPSK	1 RB / 0 RB Offset
		19975 to 20375	20175	5MHz	QPSK	1 RB / 0 RB Offset
		20000 to 20350	20175	10MHz	QPSK	1 RB / 0 RB Offset
		20025 to 20325	20175	15MHz	QPSK	1 RB / 0 RB Offset
		20050 to 20300	20175	20MHz	QPSK	1 RB / 0 RB Offset
-	RADIATED EMISSION	19957 to 20393	20175	1.4MHz	QPSK	1 RB / 0 RB Offset
		19965 to 20385	20175	3MHz	QPSK	1 RB / 0 RB Offset
		19975 to 20375	20175	5MHz	QPSK	1 RB / 0 RB Offset
		20000 to 20350	20175	10MHz	QPSK	1 RB / 0 RB Offset
		20025 to 20325	20175	15MHz	QPSK	1 RB / 0 RB Offset
		20050 to 20300	20175	20MHz	QPSK	1 RB / 0 RB Offset

**Note:** This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

**LTE BAND 17**

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE
-	ERP	23755 to 23825	23755, 23790, 23825	5MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		23780 to 23800	23780, 23790, 23800	10MHz	QPSK, 16QAM	1 RB / 0 RB Offset
-	FREQUENCY STABILITY	23755 to 23825	23790	5MHz	QPSK	1 RB / 0 RB Offset
		23780 to 23800	23790	10MHz	QPSK	1 RB / 0 RB Offset
-	OCCUPIED BANDWIDTH	23755 to 23825	23755, 23790, 23825	5MHz	QPSK, 16QAM	25 RB / 0 RB Offset
		23780 to 23800	23780, 23790, 23800	10MHz	QPSK, 16QAM	50 RB / 0 RB Offset
-	PEAK TO AVERAGE RATIO	23755 to 23825	23755, 23790, 23825	5MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		23780 to 23800	23780, 23790, 23800	10MHz	QPSK, 16QAM	1 RB / 0 RB Offset
-	BAND EDGE	23755 to 23825	23755	5MHz	QPSK	1 RB / 0 RB Offset 25 RB / 0 RB Offset
			23825	5MHz	QPSK	1 RB / 24 RB Offset 25 RB / 0 RB Offset
		23780 to 23800	23780	10MHz	QPSK	1 RB / 0 RB Offset 50 RB / 0 RB Offset
			23800	10MHz	QPSK	1 RB / 49 RB Offset 50 RB / 0 RB Offset

**Note:** This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

**TEST CONDITION:**

TEST ITEM	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
EIRP(ERP)	24deg. C, 60%RH	3.85Vdc from Battery	Alex Chen
FREQUENCY STABILITY	24deg. C, 61%RH	3.85Vdc from Battery	Yuqiang Yin
OCCUPIED BANDWIDTH	24deg. C, 61%RH	3.85Vdc from Battery	Yuqiang Yin
PEAK TO AVERAGE RATIO	24deg. C, 61%RH	3.85Vdc from Battery	Yuqiang Yin
BAND EDGE	24deg. C, 61%RH	3.85Vdc from Battery	Yuqiang Yin
CONDCUDED EMISSION	24deg. C, 61%RH	5Vdc from adapter	Yuqiang Yin
RADIATED EMISSION	24deg. C, 60%RH	5Vdc from adapter	Alex Chen



Test Report No.: RF160816W001-5

### 3.5 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC 47 CFR Part 2**

**FCC 47 CFR Part 27**

**KDB 971168 D01 Power Meas License Digital Systems v02r02**

**ANSI/TIA/EIA-603-D**

**NOTE:** All test items have been performed and recorded as per the above standards.





## 4 TEST TYPES AND RESULTS

### 4.1 OUTPUT POWER MEASUREMENT

#### 4.1.1 LIMITS OF OUTPUT POWER MEASUREMENT

Fixed, mobile, and portable (hand-held) stations operating in the 1710–1755 MHz band are limited to 1 watt EIRP.

Portable stations (hand-held devices) operating in the 704-716 MHz bands are limited to 3 watts ERP.

#### 4.1.2 TEST PROCEDURES

##### EIRP / ERP MEASUREMENT:


- a. The EUT was set up for the maximum power with LTE link data modulation. The power was measured with R&S Spectrum Analyzer. All measurements were done at 3 channels (low, middle and high operational frequency range). RBW and VBW is 10MHz for LTE.
- b. E.I.R.P power measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- c. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to “Read Value” of step a. Record the power level of S.G
- d.  $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$
- e.  $E.R.P = E.I.R.P - 2.15 \text{ dB}$

##### CONDUCTED POWER MEASUREMENT:

- a. The EUT was set up for the maximum power with LTE link data modulation and link up with simulator.
- b. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.


### 4.1.3 TEST SETUP

#### EIRP / ERP MEASUREMENT:

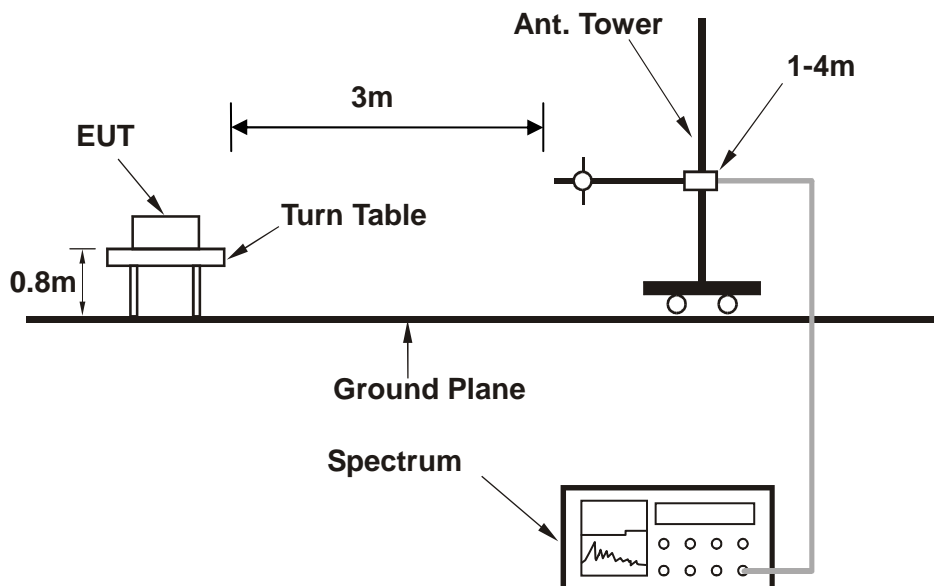

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### CONDUCTED POWER MEASUREMENT:

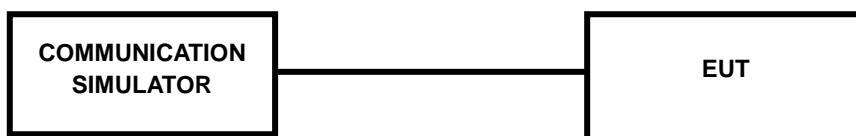

For the actual test configuration, please refer to the attached file (Test Setup Photo).



**BUREAU  
VERITAS**

Test Report No.: RF160816W001-5

4.1.4 TEST RESULTS

**AVERAGE CONDUCTED OUTPUT POWER (dBm)**

LTE Band 4							
BW	Modulation	RB Size	RB Offset	Low CH 19957	Mid CH 20175	High CH 20393	MPR
				Frequency 1710.7 MHz	Frequency 1732.5 MHz	Frequency 1754.3 MHz	
1.4MHz	QPSK	1	0	22.25	22.30	22.51	0
		1	2	22.09	22.14	22.35	0
		1	5	21.96	22.01	22.22	0
		3	0	22.23	22.28	22.49	0
		3	1	22.07	22.12	22.33	0
		3	3	21.94	21.99	22.20	0
		6	0	21.23	21.28	21.49	1
	16QAM	1	0	21.46	21.51	21.72	1
		1	2	21.42	21.47	21.68	1
		1	5	21.36	21.41	21.62	1
		3	0	21.45	21.50	21.71	1
		3	1	21.41	21.46	21.67	1
		3	3	21.35	21.40	21.61	1
		6	0	20.16	20.21	20.42	2
BW	Modulation	RB Size	RB Offset	Low CH 19965	Mid CH 20175	High CH 20385	MPR
				Frequency 1711.5 MHz	Frequency 1732.5 MHz	Frequency 1753.5 MHz	
3 MHz	QPSK	1	0	22.26	22.31	22.52	0
		1	7	22.10	22.15	22.36	0
		1	14	21.97	22.02	22.23	0
		8	0	21.26	21.31	21.52	1
		8	3	21.23	21.28	21.49	1
		8	7	21.17	21.22	21.43	1
		15	0	21.24	21.29	21.50	1
	16QAM	1	0	21.47	21.52	21.73	1
		1	7	21.43	21.48	21.69	1
		1	14	21.37	21.42	21.63	1
		8	0	20.20	20.25	20.46	2
		8	3	20.14	20.19	20.40	2
		8	7	20.10	20.15	20.36	2
		15	0	20.17	20.22	20.43	2

LTE Band 4							
BW	Modulation	RB Size	RB Offset	Low CH 19975	Mid CH 20175	High CH 20375	MPR
				Frequency 1712.5 MHz	Frequency 1732.5 MHz	Frequency 1752.5 MHz	
5 MHz	QPSK	1	0	22.29	22.34	22.55	0
		1	12	22.13	22.18	22.39	0
		1	24	22.00	22.05	22.26	0
		12	0	21.29	21.34	21.55	1
		12	6	21.26	21.31	21.52	1
		12	13	21.20	21.25	21.46	1
		25	0	21.27	21.32	21.53	1
	16QAM	1	0	21.50	21.55	21.76	1
		1	12	21.46	21.51	21.72	1
		1	24	21.40	21.45	21.66	1
		12	0	20.23	20.28	20.49	2
		12	6	20.17	20.22	20.43	2
		12	13	20.13	20.18	20.39	2
		25	0	20.20	20.25	20.46	2
BW	Modulation	RB Size	RB Offset	Low CH 20000	Mid CH 20175	High CH 20350	MPR
				Frequency 1715 MHz	Frequency 1732.5 MHz	Frequency 1750 MHz	
10 MHz	QPSK	1	0	22.33	22.38	22.59	0
		1	24	22.17	22.22	22.43	0
		1	49	22.04	22.09	22.30	0
		25	0	21.33	21.38	21.59	1
		25	12	21.30	21.35	21.56	1
		25	25	21.24	21.29	21.50	1
		50	0	21.31	21.36	21.57	1
	16QAM	1	0	21.54	21.59	21.80	1
		1	24	21.50	21.55	21.76	1
		1	49	21.44	21.49	21.70	1
		25	0	20.27	20.32	20.53	2
		25	12	20.21	20.26	20.47	2
		25	25	20.17	20.22	20.43	2
		50	0	20.24	20.29	20.50	2



Test Report No.: RF160816W001-5

LTE Band 4							
BW	Modulation	RB Size	RB Offset	Low CH 20025	Mid CH 20175	High CH 20325	MPR
				Frequency 1717.5 MHz	Frequency 1732.5 MHz	Frequency 1747.5 MHz	
15 MHz	QPSK	1	0	22.39	22.44	22.65	0
		1	37	22.23	22.28	22.49	0
		1	74	22.10	22.15	22.36	0
		36	0	21.39	21.44	21.65	1
		36	19	21.36	21.41	21.62	1
		36	39	21.30	21.35	21.56	1
		75	0	21.37	21.42	21.63	1
	16QAM	1	0	21.60	21.65	21.86	1
		1	37	21.56	21.61	21.82	1
		1	74	21.50	21.55	21.76	1
		36	0	20.33	20.38	20.59	2
		36	19	20.27	20.32	20.53	2
		36	39	20.23	20.28	20.49	2
		75	0	20.30	20.35	20.56	2
BW	Modulation	RB Size	RB Offset	Low CH 20050	Mid CH 20175	High CH 20300	MPR
				Frequency 1720 MHz	Frequency 1732.5 MHz	Frequency 1745 MHz	
20MHz	QPSK	1	0	22.42	22.47	22.68	0
		1	50	22.26	22.31	22.52	0
		1	99	22.13	22.18	22.39	0
		50	0	21.42	21.47	21.68	1
		50	25	21.39	21.44	21.65	1
		50	50	21.33	21.38	21.59	1
		100	0	21.40	21.45	21.66	1
	16QAM	1	0	21.63	21.68	21.89	1
		1	50	21.59	21.64	21.85	1
		1	99	21.53	21.58	21.79	1
		50	0	20.36	20.41	20.62	2
		50	25	20.30	20.35	20.56	2
		50	50	20.26	20.31	20.52	2
		100	0	20.33	20.38	20.59	2



Test Report No.: RF160816W001-5

LTE Band 17							
BW	Modulation	RB Size	RB Offset	Low CH 23755	Mid CH 23790	High CH 23825	MPR
				Frequency 706.5 MHz	Frequency 710 MHz	Frequency 713.5 MHz	
5 MHz	QPSK	1	0	22.41	22.14	22.29	0
		1	12	22.34	22.31	22.25	0
		1	24	22.16	21.99	22.15	0
		12	0	21.62	21.35	21.50	1
		12	6	21.24	21.21	21.15	1
		12	13	21.34	21.17	21.33	1
		25	0	21.59	21.32	21.47	1
	16QAM	1	0	21.19	21.16	21.10	1
		1	12	21.32	21.15	21.31	1
		1	24	21.39	21.12	21.27	1
		12	0	20.59	20.56	20.50	2
		12	6	20.53	20.36	20.52	2
		12	13	20.61	20.34	20.49	2
		25	0	20.51	20.48	20.42	2
BW	Modulation	RB Size	RB Offset	Low CH 23780	Mid CH 23790	High CH 23800	MPR
				Frequency 709 MHz	Frequency 710 MHz	Frequency 711 MHz	
10 MHz	QPSK	1	0	22.45	22.18	22.33	0
		1	24	22.38	22.35	22.29	0
		1	49	22.20	22.03	22.19	0
		25	0	21.66	21.39	21.54	1
		25	12	21.28	21.25	21.19	1
		25	25	21.38	21.21	21.37	1
		50	0	21.63	21.36	21.51	1
	16QAM	1	0	21.23	21.20	21.14	1
		1	24	21.36	21.19	21.35	1
		1	49	21.43	21.16	21.31	1
		25	0	20.63	20.60	20.54	2
		25	12	20.57	20.40	20.56	2
		25	25	20.65	20.38	20.53	2
		50	0	20.55	20.52	20.46	2



**BUREAU  
VERITAS**

Test Report No.: RF160816W001-5

**EIRP**

**LTE BAND 4**

**CHANNEL BANDWIDTH: 1.4MHz QPSK**

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	LIMIT (W)
19957	1710.7	-21.09	41.29	20.20	104.81	H	1
20175	1732.5	-21.26	41.36	20.10	102.33	H	1
20393	1754.3	-21.77	42.74	20.97	124.97	H	1
19957	1710.7	-18.30	44.25	25.95	393.10	V	1
20175	1732.5	-18.68	44.20	25.52	356.45	V	1
20393	1754.3	-18.08	44.09	26.01	<b>398.57</b>	V	1

**CHANNEL BANDWIDTH: 1.4MHz 16QAM**

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	LIMIT (W)
19957	1710.7	-21.96	41.29	19.33	85.78	H	1
20175	1732.5	-22.19	41.36	19.17	82.60	H	1
20393	1754.3	-22.73	42.74	20.01	100.18	H	1
19957	1710.7	-19.17	44.25	25.08	321.74	V	1
20175	1732.5	-19.61	44.20	24.59	287.74	V	1
20393	1754.3	-19.04	44.09	25.05	319.52	V	1

**LTE BAND 4**

**CHANNEL BANDWIDTH: 3MHz QPSK**

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	LIMIT (W)
19965	1711.5	-21.07	41.27	20.20	104.64	H	1
20175	1732.5	-21.32	41.36	20.04	100.93	H	1
20385	1753.5	-21.72	42.76	21.04	126.97	H	1
19965	1711.5	-18.28	44.26	25.98	396.46	V	1
20175	1732.5	-18.74	44.20	25.46	351.56	V	1
20385	1753.5	-18.03	44.23	26.20	<b>417.06</b>	V	1



Test Report No.: RF160816W001-5

**CHANNEL BANDWIDTH: 3MHz 16QAM**

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	LIMIT (W)
19965	1711.5	-22.14	41.27	19.13	81.79	H	1
20175	1732.5	-22.21	41.36	19.15	82.22	H	1
20385	1753.5	-22.71	42.76	20.05	101.09	H	1
19965	1711.5	-19.35	44.26	24.91	309.88	V	1
20175	1732.5	-19.63	44.20	24.57	286.42	V	1
20385	1753.5	-19.02	44.23	25.21	332.05	V	1

**LTE BAND 4**

**CHANNEL BANDWIDTH: 5MHz QPSK**

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	LIMIT (W)
19975	1712.5	-21.13	41.39	20.26	106.15	H	1
20175	1732.5	-21.27	41.36	20.09	102.09	H	1
20375	1752.5	-21.67	42.63	20.96	124.71	H	1
19975	1712.5	-18.34	44.17	25.83	382.47	V	1
20175	1732.5	-18.69	44.20	25.51	355.63	V	1
20375	1752.5	-17.98	44.35	26.37	<b>433.01</b>	V	1

**CHANNEL BANDWIDTH: 5MHz 16QAM**

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	LIMIT (W)
19975	1712.5	-21.96	41.39	19.43	87.68	H	1
20175	1732.5	-22.29	41.36	19.07	80.72	H	1
20375	1752.5	-22.77	42.63	19.86	96.81	H	1
19975	1712.5	-19.17	44.17	25.00	315.94	V	1
20175	1732.5	-19.71	44.20	24.49	281.19	V	1
20375	1752.5	-19.08	44.35	25.27	336.12	V	1





**BUREAU  
VERITAS**

Test Report No.: RF160816W001-5

**LTE BAND 4**

**CHANNEL BANDWIDTH: 10MHz QPSK**

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	LIMIT (W)
20000	1715.0	-20.94	41.49	20.55	113.40	H	1
20175	1732.5	-21.21	41.36	20.15	103.51	H	1
20350	1750.0	-21.54	42.28	20.74	118.66	H	1
20000	1715.0	-18.15	44.06	25.91	390.21	V	1
20175	1732.5	-18.63	44.20	25.57	360.58	V	1
20350	1750.0	-17.85	44.43	26.58	<b>454.99</b>	V	1

**CHANNEL BANDWIDTH: 10MHz 16QAM**

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	LIMIT (W)
20000	1715.0	-22.09	41.49	19.40	87.02	H	1
20175	1732.5	-22.31	41.36	19.05	80.35	H	1
20350	1750.0	-22.70	42.28	19.58	90.84	H	1
20000	1715.0	-19.30	44.06	24.76	299.43	V	1
20175	1732.5	-19.73	44.20	24.47	279.90	V	1
20350	1750.0	-19.01	44.43	25.42	348.34	V	1

**LTE BAND 4**

**CHANNEL BANDWIDTH: 15MHz QPSK**

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	LIMIT (W)
20025	1717.5	-20.95	41.34	20.39	109.35	H	1
20175	1732.5	-21.28	41.36	20.08	101.86	H	1
20325	1747.5	-21.61	42.09	20.48	111.58	H	1
20025	1717.5	-18.16	44.04	25.88	387.61	V	1
20175	1732.5	-18.70	44.20	25.50	354.81	V	1
20325	1747.5	-17.92	44.22	26.30	<b>426.09</b>	V	1



Test Report No.: RF160816W001-5

### CHANNEL BANDWIDTH: 15MHz 16QAM

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	LIMIT (W)
20025	1717.5	-21.81	41.34	19.53	89.70	H	1
20175	1732.5	-22.15	41.36	19.21	83.37	H	1
20325	1747.5	-22.46	42.09	19.63	91.75	H	1
20025	1717.5	-19.02	44.04	25.02	317.98	V	1
20175	1732.5	-19.57	44.20	24.63	290.40	V	1
20325	1747.5	-18.77	44.22	25.45	350.35	V	1

### LTE BAND 4

#### CHANNEL BANDWIDTH: 20MHz QPSK

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	LIMIT (W)
20050	1720.0	-21.53	41.28	19.75	94.43	H	1
20175	1732.5	-21.73	41.36	19.63	91.85	H	1
20300	1745.0	-22.19	41.96	19.77	94.78	H	1
20050	1720.0	-18.74	44.14	25.40	<b>346.34</b>	V	1
20175	1732.5	-19.15	44.20	25.05	319.60	V	1
20300	1745.0	-18.50	43.88	25.38	345.30	V	1

#### CHANNEL BANDWIDTH: 20MHz 16QAM

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	LIMIT (W)
20050	1720.0	-22.46	41.28	18.82	76.23	H	1
20175	1732.5	-22.80	41.36	18.56	71.80	H	1
20300	1745.0	-23.02	41.96	18.94	78.29	H	1
20050	1720.0	-19.67	44.14	24.47	279.58	V	1
20175	1732.5	-20.22	44.20	23.98	249.80	V	1
20300	1745.0	-19.33	43.88	24.55	285.23	V	1

**REMARKS:** 1. EIRP Output Power (dBm) = SPA LVL (dBm) + Correction Factor (dB).  
2. Correction factor (dB) = Free Space Loss + Antenna Factor + Cable Loss



**BUREAU  
VERITAS**

Test Report No.: RF160816W001-5

**LTE BAND 17**

**CHANNEL BANDWIDTH: 5MHz QPSK**

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	ERP(dBm)	ERP(mW)	Polarization (H/V)	LIMIT (W)
23755	706.5	-11.94	32.64	18.55	71.53	H	3
23790	710.0	-12.22	32.92	18.55	<b>71.61</b>	H	3
23825	713.5	-12.28	32.83	18.40	69.12	H	3
23755	706.5	-20.15	32.14	9.84	9.63	V	3
23790	710.0	-20.55	32.18	9.48	8.87	V	3
23825	713.5	-20.64	31.95	9.16	8.25	V	3

**CHANNEL BANDWIDTH: 5MHz 16QAM**

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	ERP(dBm)	ERP(mW)	Polarization (H/V)	LIMIT (W)
23755	706.5	-12.80	32.64	17.69	58.68	H	3
23790	710.0	-13.09	32.92	17.68	58.61	H	3
23825	713.5	-13.13	32.83	17.55	56.83	H	3
23755	706.5	-21.01	32.14	8.98	7.90	V	3
23790	710.0	-21.42	32.18	8.61	7.26	V	3
23825	713.5	-21.49	31.95	8.31	6.78	V	3

**LTE BAND 17**

**CHANNEL BANDWIDTH: 10MHz QPSK**

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	ERP(dBm)	ERP(mW)	Polarization (H/V)	LIMIT (W)
23780	709.0	-12.52	32.90	18.23	<b>66.45</b>	H	3
23790	710.0	-12.67	32.92	18.10	64.54	H	3
23800	711.0	-12.86	32.92	17.91	61.82	H	3
23780	709.0	-20.73	32.20	9.32	8.54	V	3
23790	710.0	-21.00	32.18	9.03	8.00	V	3
23800	711.0	-21.22	32.13	8.76	7.52	V	3



Test Report No.: RF160816W001-5

**CHANNEL BANDWIDTH: 10MHz 16QAM**

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	ERP(dBm)	ERP(mW)	Polarization (H/V)	LIMIT (W)
23780	709.0	-13.45	32.90	17.30	53.64	H	3
23790	710.0	-13.74	32.92	17.03	50.44	H	3
23800	711.0	-13.69	32.92	17.08	51.06	H	3
23780	709.0	-21.66	32.20	8.39	6.89	V	3
23790	710.0	-22.07	32.18	7.96	6.25	V	3
23800	711.0	-22.05	32.13	7.93	6.21	V	3

**REMARKS:** 1. ERP Output Power (dBm) = SPA LVL (dBm) + Correction Factor (dB) -2.15(dB).  
2. Correction factor (dB) = Free Space Loss + Antenna Factor + Cable Loss

## 4.2 FREQUENCY STABILITY MEASUREMENT

### 4.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT


The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

### 4.2.2 TEST PROCEDURE

- Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the  $\pm 0.5^{\circ}\text{C}$  during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

**NOTE:** The frequency error was recorded frequency error from the communication simulator.

### 4.2.3 TEST SETUP

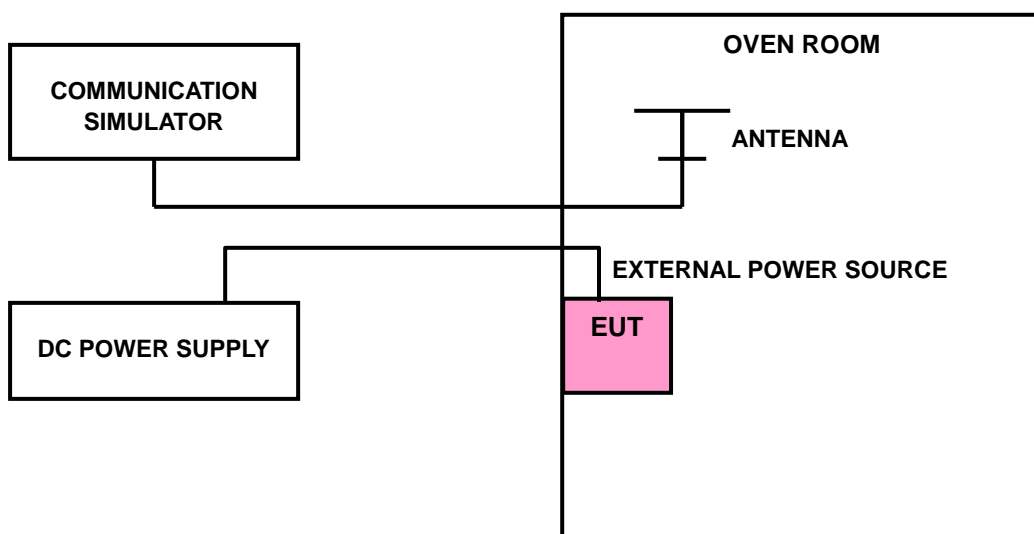

#### 4.2.4 TEST RESULTS

##### FREQUENCY ERROR VS. VOLTAGE

VOLTAGE (Volts)	FREQUENCY ERROR (PPM)						LIMIT (ppm)
	LTE Band 4						
	1.4MHz	3MHz	5MHz	10MHz	15MHz	20MHz	
3.8	0.0015	0.0014	0.0014	0.0018	0.0012	0.0014	2.5
3.5	-0.0019	-0.0018	-0.0017	-0.0022	-0.0017	-0.0018	2.5
4.2	-0.0017	-0.0016	-0.0016	-0.0021	-0.0014	-0.0016	2.5

**NOTE:** The applicant defined the normal working voltage of the battery is from 3.5Vdc to 4.2Vdc.

##### FREQUENCY ERROR vs. TEMPERATURE.

TEMP. (°C)	Frequency Error (PPM)						LIMIT (ppm)
	LTE Band 4						
	1.4MHz	3MHz	5MHz	10MHz	15MHz	20MHz	
-30	-0.0061	-0.0062	-0.0057	-0.0062	-0.0064	-0.0066	2.5
-20	-0.0054	-0.0057	-0.0048	-0.0055	-0.0058	-0.0059	2.5
-10	-0.0047	-0.0050	-0.0043	-0.0047	-0.0050	-0.0052	2.5
0	-0.0044	-0.0042	-0.0035	-0.0039	-0.0044	-0.0045	2.5
10	-0.0034	-0.0035	-0.0034	-0.0032	-0.0038	-0.0039	2.5
20	-0.0021	-0.0028	-0.0023	-0.0024	-0.0031	-0.0032	2.5
30	-0.0024	-0.0021	-0.0024	-0.0017	-0.0025	-0.0025	2.5
40	-0.0015	-0.0015	-0.0015	-0.0009	-0.0018	-0.0018	2.5
50	-0.0007	-0.0009	-0.0008	-0.0002	-0.0011	-0.0011	2.5
60	0.0002	-0.0002	-0.0001	0.0005	-0.0004	-0.0003	2.5

**FREQUENCY ERROR VS. VOLTAGE**

VOLTAGE (Volts)	FREQUENCY ERROR (ppm)		LIMIT (ppm)
	LTE Band 17		
	5MHz	10MHz	
3.8	0.0036	0.0033	2.5
3.5	-0.0013	-0.0044	2.5
4.2	-0.0012	-0.0039	2.5

**NOTE:** The applicant defined the normal working voltage of the battery is from 3.5Vdc to 4.2Vdc.

**FREQUENCY ERROR vs. TEMPERATURE.**


VOLTAGE (Volts)	FREQUENCY ERROR (ppm)		LIMIT (ppm)
	LTE Band 17		
	5MHz	10MHz	
-30	-0.0163	-0.0150	2.5
-20	-0.0146	-0.0135	2.5
-10	-0.0128	-0.0117	2.5
0	-0.0111	-0.0102	2.5
10	-0.0094	-0.0087	2.5
20	-0.0077	-0.0072	2.5
30	-0.0060	-0.0055	2.5
40	-0.0044	-0.0036	2.5
50	-0.0026	-0.0019	2.5
60	-0.0005	-0.0002	2.5

### 4.3 OCCUPIED BANDWIDTH MEASUREMENT

#### 4.3.1 LIMITS OF OCCUPIED BANDWIDTH MEASUREMENT

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 %of the total mean power of a given emission.

#### 4.3.2 TEST SETUP

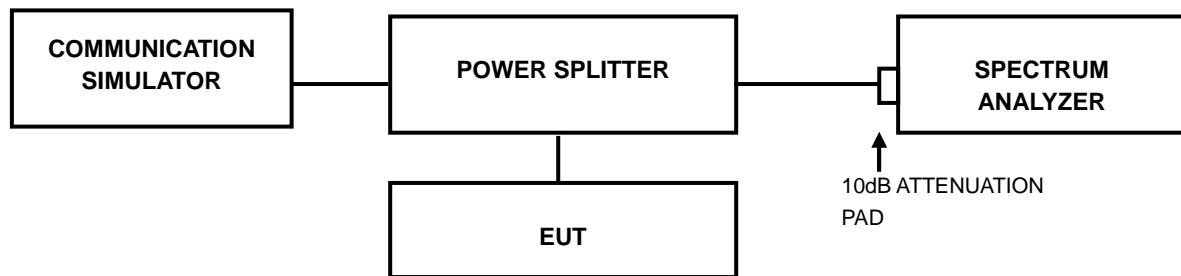

#### 4.3.3 TEST PROCEDURES

- a. The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.
- b. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.





**BUREAU  
VERITAS**

Test Report No.: RF160816W001-5

### 4.3.4 TEST RESULTS

#### LTE BAND 4

CHANNEL BANDWIDTH: 1.4MHz				CHANNEL BANDWIDTH: 3MHz			
CHANNEL	Frequency (MHz)	99% OCCUPIED Bandwidth (MHz)		CHANNEL	Frequency (MHz)	99% OCCUPIED Bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
19957	1710.7	1.09	1.08	19965	1711.5	2.68	2.68
20175	1732.5	1.09	1.08	20175	1732.5	2.68	2.68
20393	1754.3	1.09	1.08	20385	1753.5	2.68	2.68






**BUREAU  
VERITAS**

**Test Report No.: RF160816W001-5**

**LTE BAND 4**

CHANNEL BANDWIDTH: 5MHz				CHANNEL BANDWIDTH: 10MHz			
CHANNEL	Frequency (MHz)	99% OCCUPIED Bandwidth (MHz)		CHANNEL	Frequency (MHz)	99% OCCUPIED Bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
19975	1712.5	4.48	4.47	20000	1715	8.92	8.93
20175	1732.5	4.48	4.47	20175	1732.5	8.91	8.92
20375	1752.5	4.47	4.47	20350	1750	8.92	8.93

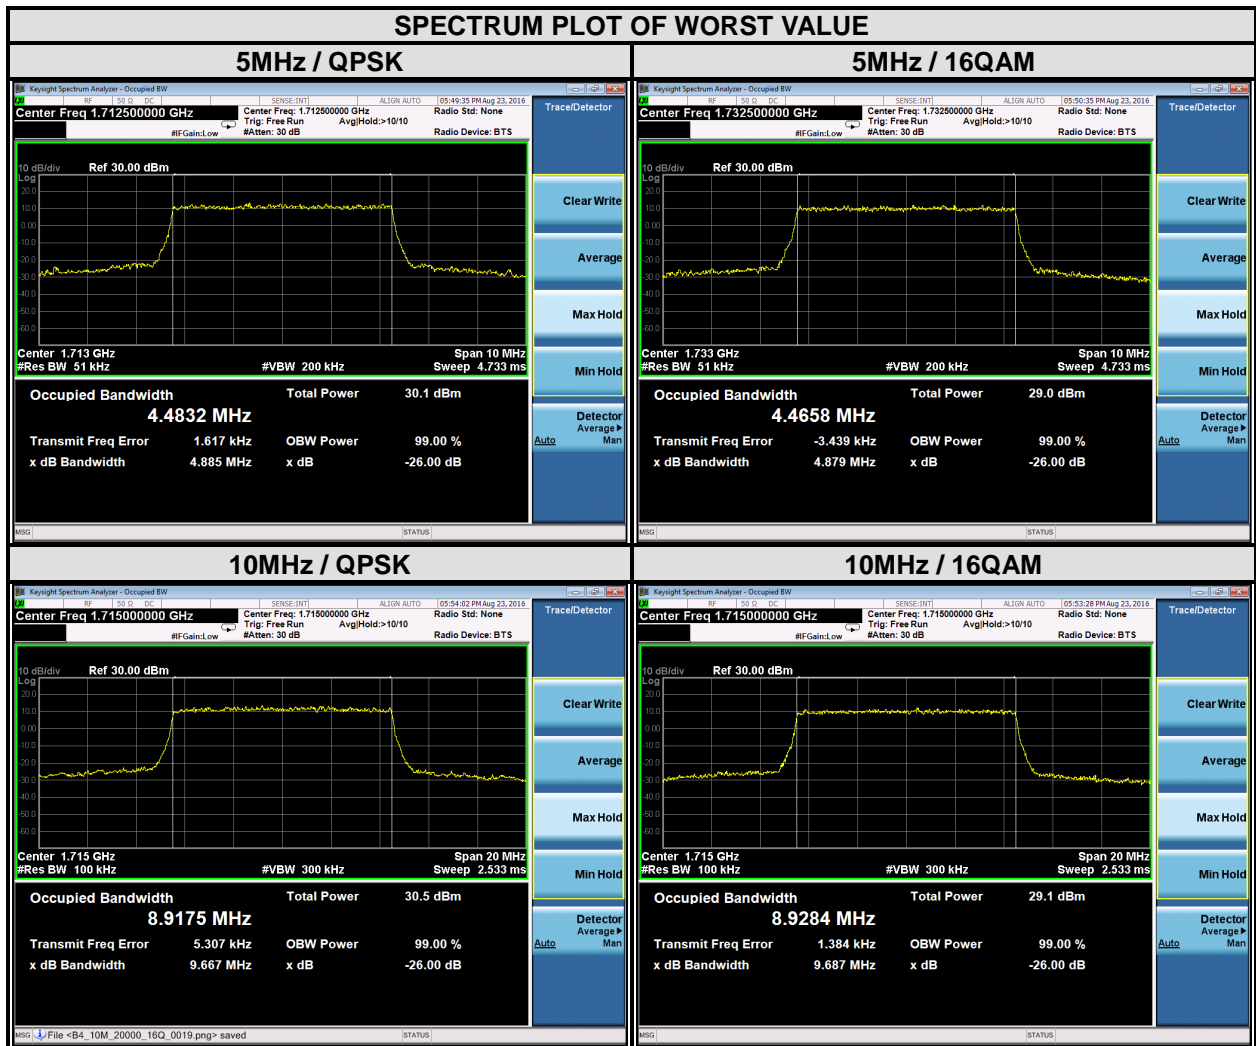



BUREAU VERITAS

Test Report No.: RF160816W001-5

LTE BAND 4

CHANNEL BANDWIDTH: 15MHz				CHANNEL BANDWIDTH: 20MHz			
CHANNEL	FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH (MHz)		CHANNEL	FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH (MHz)	
		QPSK	16QAM			QPSK	16QAM
20025	1717.5	13.38	13.36	20050	1720	17.87	17.82
20175	1732.5	13.36	13.35	20175	1732.5	17.86	17.79
20325	1747.5	13.37	13.37	20300	1745	17.85	17.81





LTE BAND 17

CHANNEL BANDWIDTH: 5MHz				CHANNEL BANDWIDTH: 10MHz			
CHANNEL	Frequency (MHz)	99% OCCUPIED Bandwidth (MHz)		CHANNEL	Frequency (MHz)	99% OCCUPIED Bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
23755	706.5	4.47	4.46	23780	709	8.90	8.88
23790	710	4.47	4.46	23790	710	8.89	8.89
23825	713.5	4.48	4.47	23800	711	8.90	8.90






#### 4.4 PEAK TO AVERAGE RATIO

##### 4.4.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB

##### 4.4.2 TEST SETUP

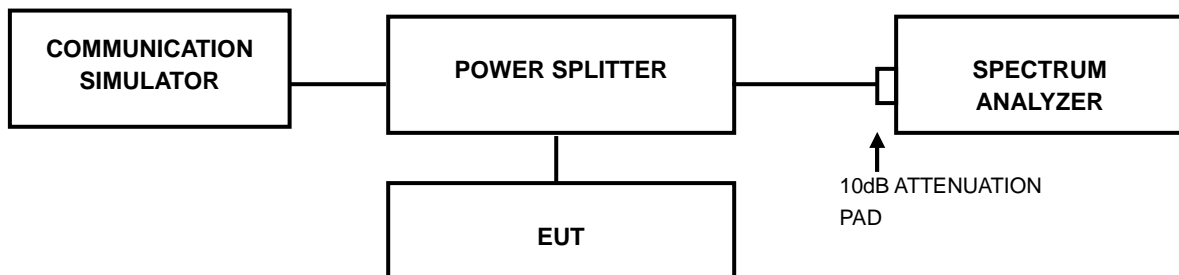

##### 4.4.3 TEST PROCEDURES

1. Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1%.




**BUREAU  
VERITAS**

Test Report No.: RF160816W001-5

## 4.4.4 TEST RESULTS


### LTE BAND 4

CHANNEL BANDWIDTH: 1.4MHz				CHANNEL BANDWIDTH: 3MHz			
CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)		CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)	
		QPSK	16QAM			QPSK	16QAM
19957	1710.7	4.74	5.57	19965	1711.5	4.90	5.67
20175	1732.5	4.79	5.64	20175	1732.5	4.91	5.69
20393	1754.3	4.82	5.67	20385	1753.5	5.00	5.78

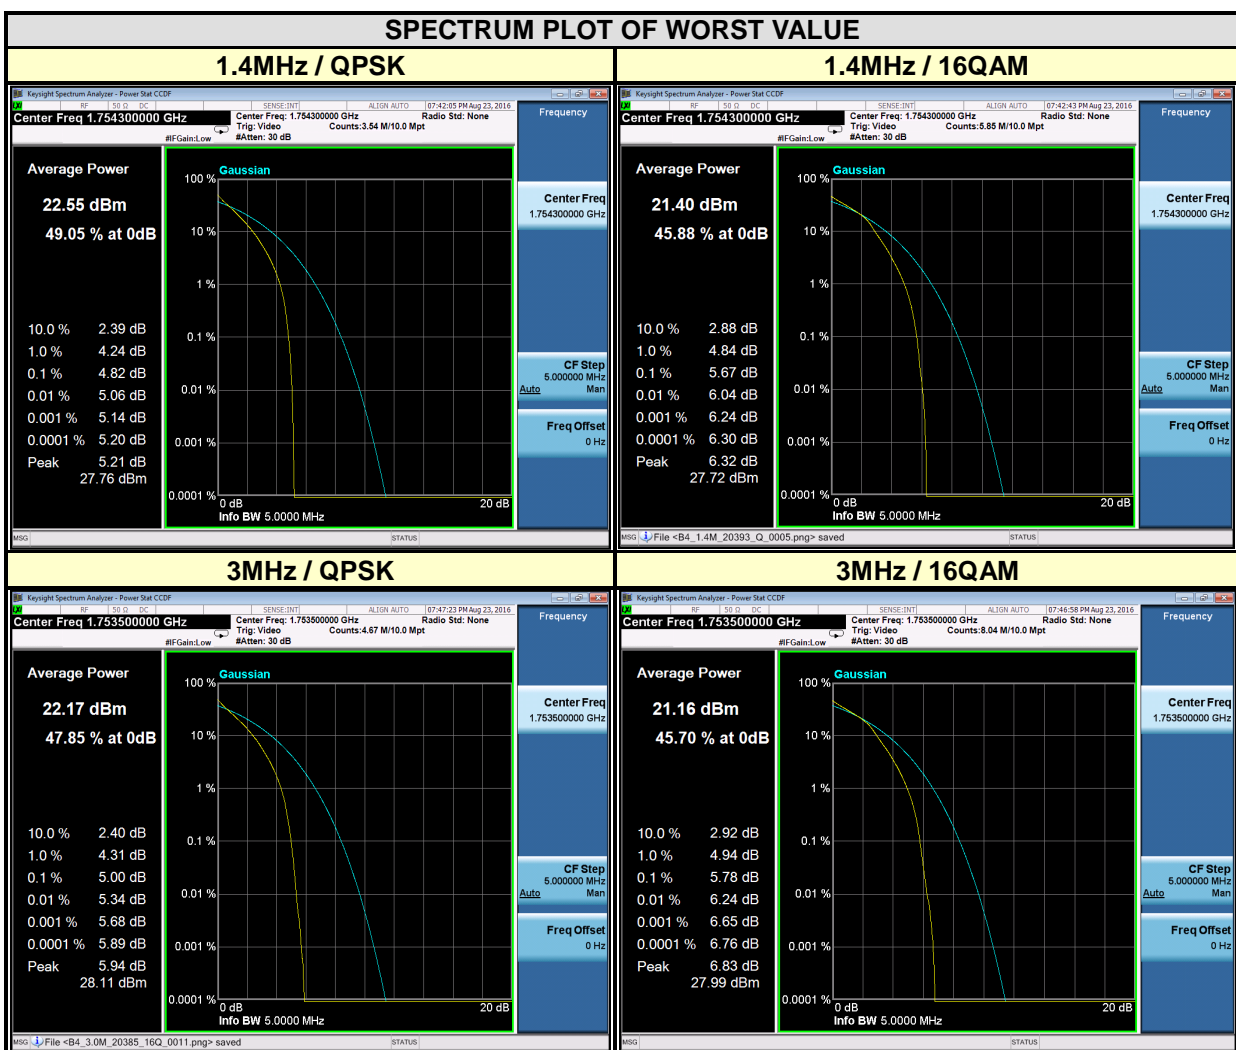




CHANNEL BANDWIDTH: 5MHz				CHANNEL BANDWIDTH: 10MHz			
CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)		CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)	
		QPSK	16QAM			QPSK	16QAM
19975	1712.5	4.99	5.79	20000	1715	4.92	5.71
20175	1732.5	4.97	5.75	20175	1732.5	4.86	5.59
20375	1752.5	5.04	5.84	20350	1750	4.95	5.74

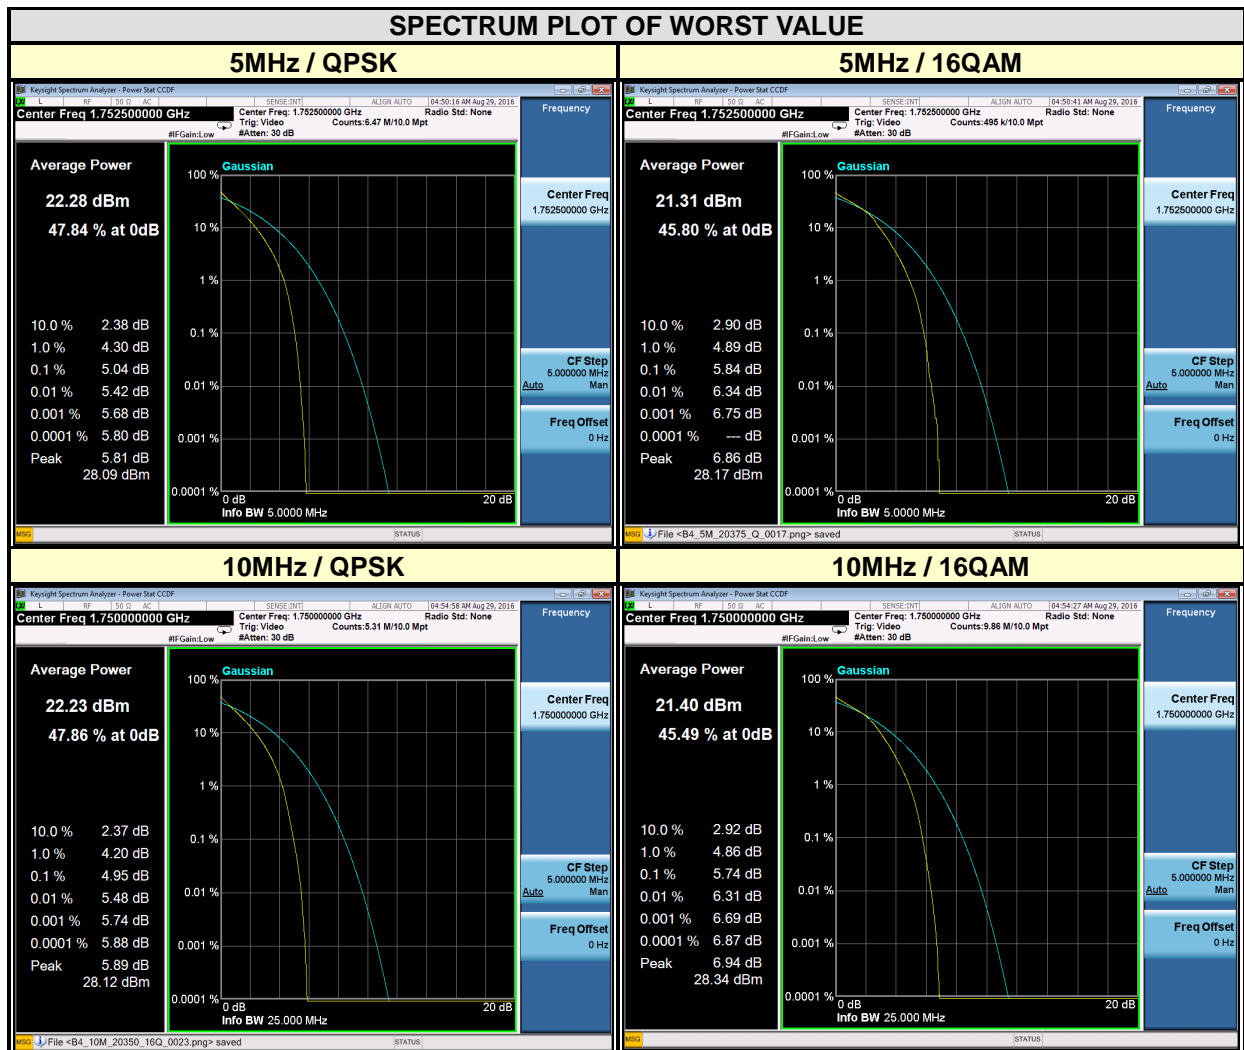



CHANNEL BANDWIDTH: 15MHz				CHANNEL BANDWIDTH: 20MHz			
CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)		CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)	
		QPSK	16QAM			QPSK	16QAM
20025	1717.5	4.95	5.79	20050	1720	5.03	5.83
20175	1732.5	4.92	5.74	20175	1732.5	5.01	5.78
20325	1747.5	4.94	5.74	20300	1745	5.04	5.80

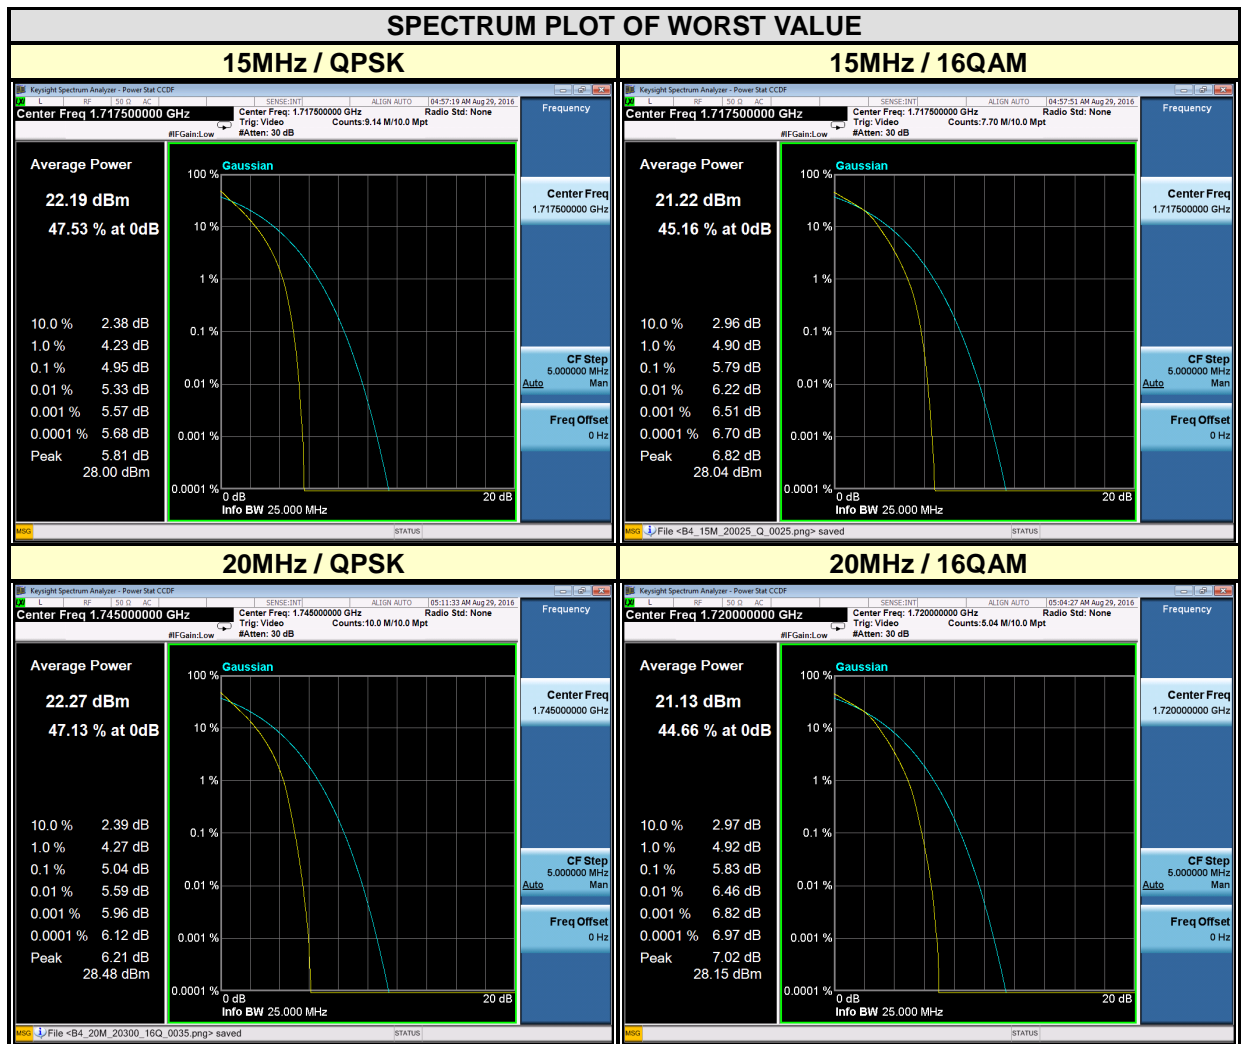






**BUREAU  
VERITAS**

Test Report No.: RF160816W001-5

**LTE BAND 17**

CHANNEL BANDWIDTH: 5MHz				CHANNEL BANDWIDTH: 10MHz			
CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)		CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)	
		QPSK	16QAM			QPSK	16QAM
23755	706.5	5.30	6.12	23780	709	4.89	5.72
23790	710	4.88	5.68	23790	710	4.93	5.74
23825	713.5	4.95	5.72	23800	711	4.98	5.75

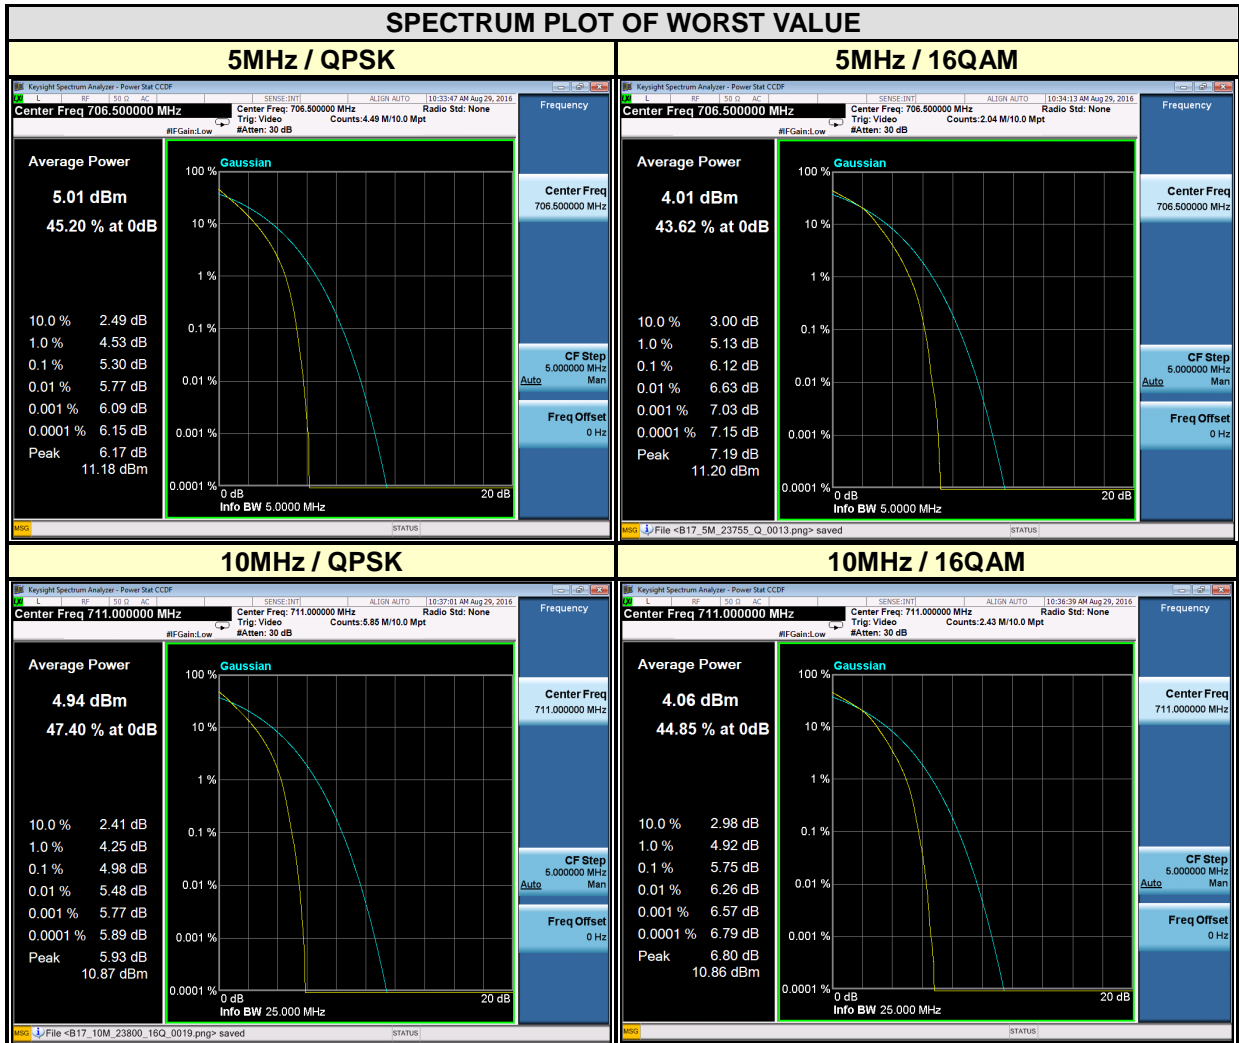

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,  
Houjie Town, Dongguan City,  
Guangdong 523942, China

Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dq@cn.bureauveritas.com](mailto:customerservice.dq@cn.bureauveritas.com)


## 4.5 BAND EDGE MEASUREMENT

### 4.5.1 LIMITS OF BAND EDGE MEASUREMENT

The power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least  $43 + 10 \log (P)$  dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater.

However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

### 4.5.2 TEST SETUP

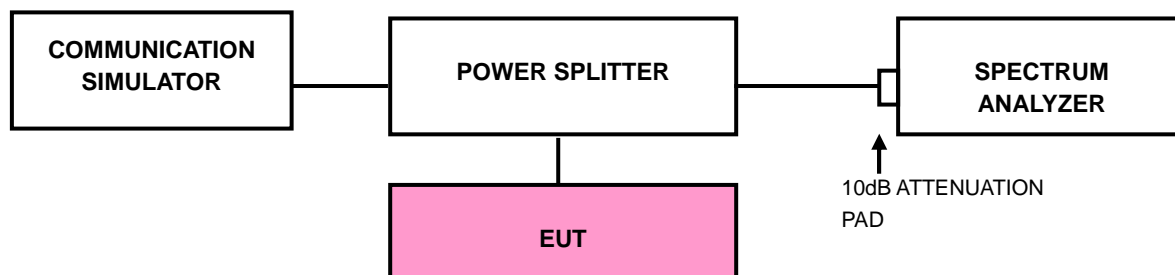




#### 4.5.3 TEST PROCEDURES

- a. The EUT was set up for the maximum peak power with LTE link data modulation. The power was measured with R&S Spectrum Analyzer. All measurements were done at 2 channels (low and high operational frequency range.).
- b. The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.
- c. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RB of the spectrum is 20kHz and VB of the spectrum is 100 kHz. (LTE bandwidth 1.4MHz)
- d. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RB of the spectrum is 30kHz and VB of the spectrum is 100kHz. (LTE bandwidth 3MHz)
- e. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RB of the spectrum is 50kHz and VB of the spectrum is 200kHz. (LTE bandwidth 5MHz)
- f. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RB of the spectrum is 100kHz and VB of the spectrum is 300kHz. (LTE bandwidth 10MHz)
- g. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RB of the spectrum is 200kHz and VB of the spectrum is 1MHz. (LTE bandwidth 15MHz)
- h. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RB of the spectrum is 200kHz and VB of the spectrum is 1MHz. (LTE bandwidth 20MHz)
- i. Record the max trace plot into the test report.



### 4.5.4 TEST RESULTS

#### LTE BAND 4

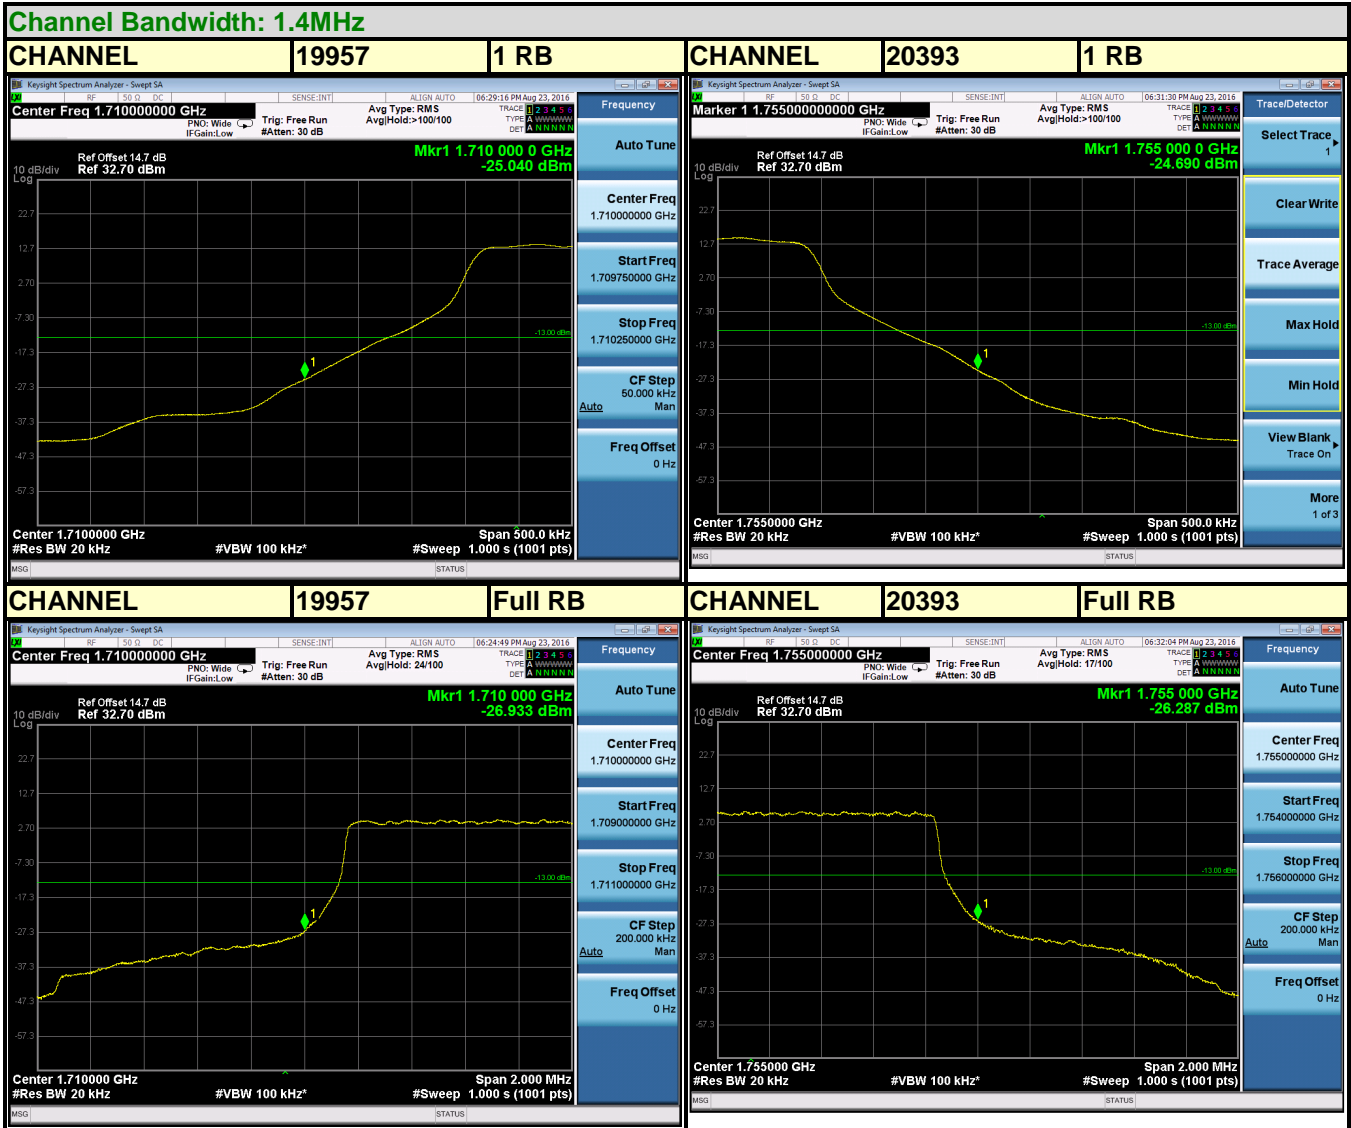



LTE BAND 4






BUREAU VERITAS

# Test Report No.: RF160816W001-5

## LTE BAND 4

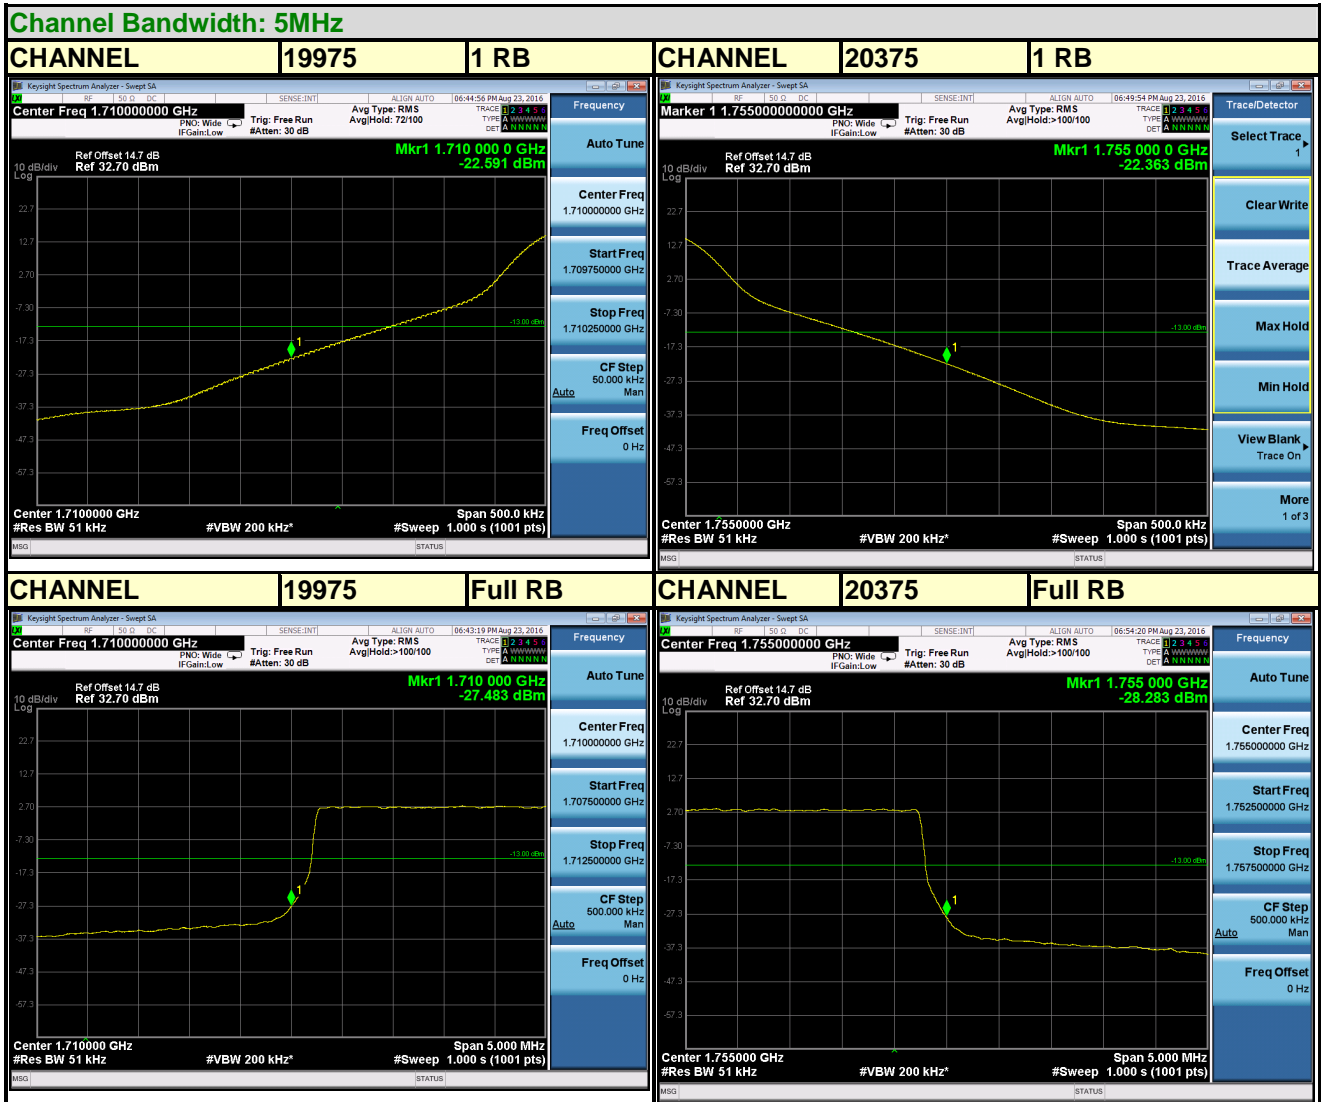

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,  
Houjie Town, Dongguan City,  
Guangdong 523942, China

Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dq@cn.bureauveritas.com](mailto:customerservice.dq@cn.bureauveritas.com)



Test Report No.: RF160816W001-5

LTE BAND 4



Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,  
Houjie Town, Dongguan City,  
Guangdong 523942, China

Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dq@cn.bureauveritas.com](mailto:customerservice.dq@cn.bureauveritas.com)



LTE BAND 4







Test Report No.: RF160816W001-5

LTE BAND 4



Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch


No. 34, Chenwulu Section, Guantai Rd.,  
Houjie Town, Dongguan City,  
Guangdong 523942, China

Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dq@cn.bureauveritas.com](mailto:customerservice.dq@cn.bureauveritas.com)



Test Report No.: RF160816W001-5

LTE BAND 17

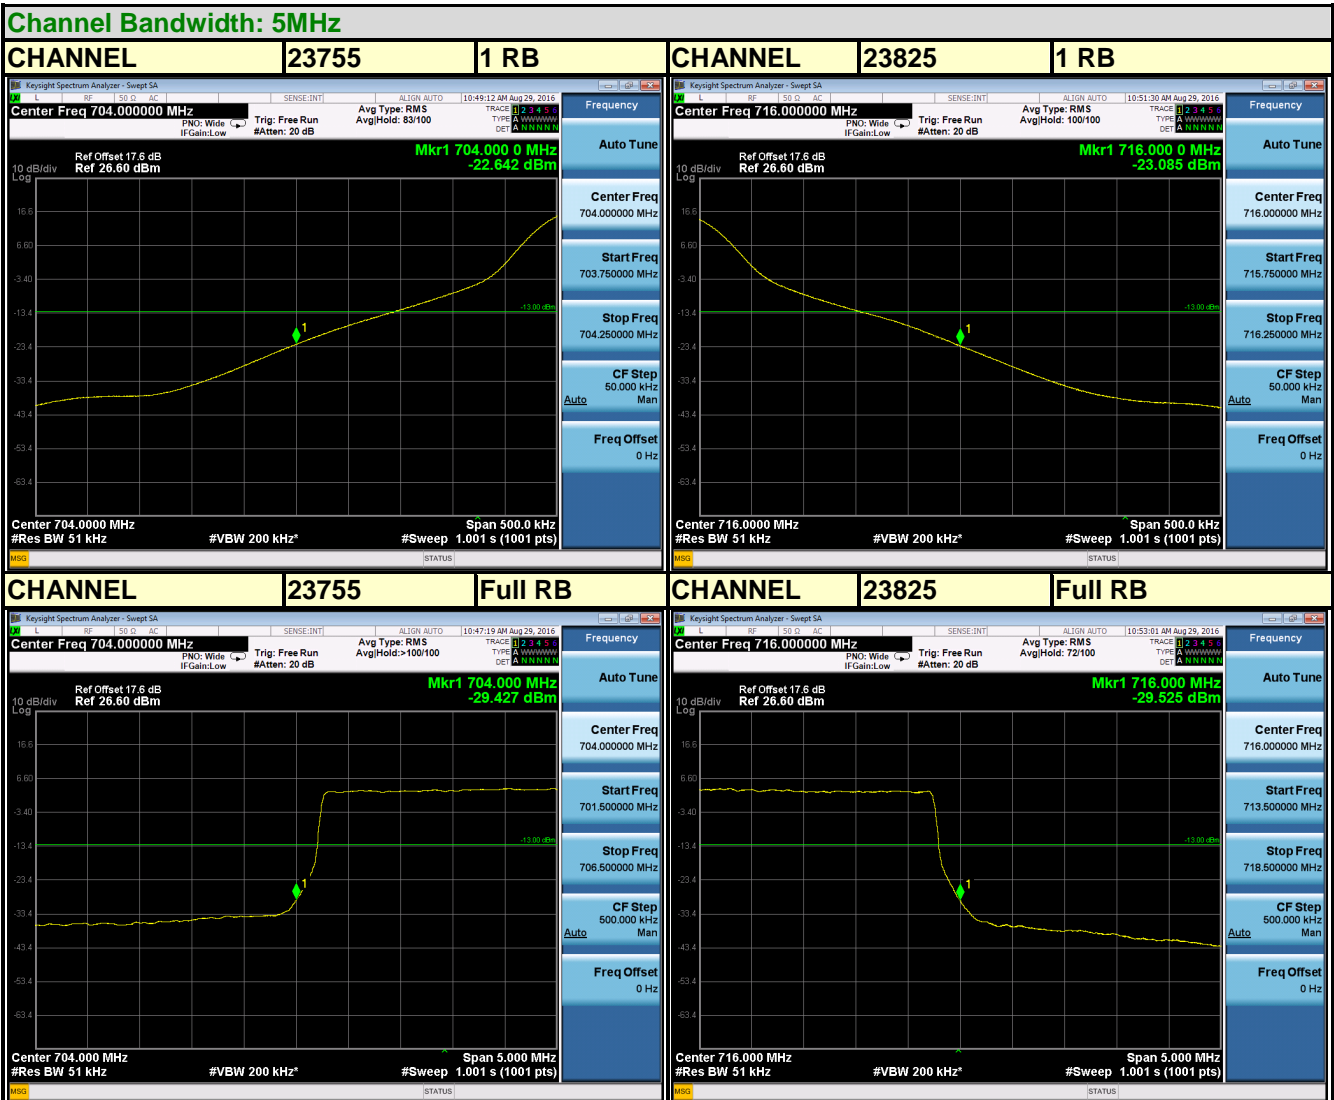

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,  
Houjie Town, Dongguan City,  
Guangdong 523942, China

Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dq@cn.bureauveritas.com](mailto:customerservice.dq@cn.bureauveritas.com)



BUREAU VERITAS

Test Report No.: RF160816W001-5

LTE BAND 17



Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,  
Houjie Town, Dongguan City,  
Guangdong 523942, China

Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dq@cn.bureauveritas.com](mailto:customerservice.dq@cn.bureauveritas.com)

## 4.6 CONDUCTED SPURIOUS EMISSIONS


### 4.6.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log_{10}(P)$  dB. The limit of emission equal to  $-13\text{dBm}$

### 4.6.2 TEST PROCEDURE

- a. The EUT makes a phone call to the communication simulator. All measurements were done at middle operational frequency range.
- b. Measuring frequency range is from 30 MHz to 19.1GHz for LTE Band 4 and 30 MHz to 9GHz for LTE Band 17. 10dB attenuation pad is connected with spectrum. RBW=1MHz and VBW=3MHz are used for conducted emission measurement.

### 4.6.3 TEST SETUP

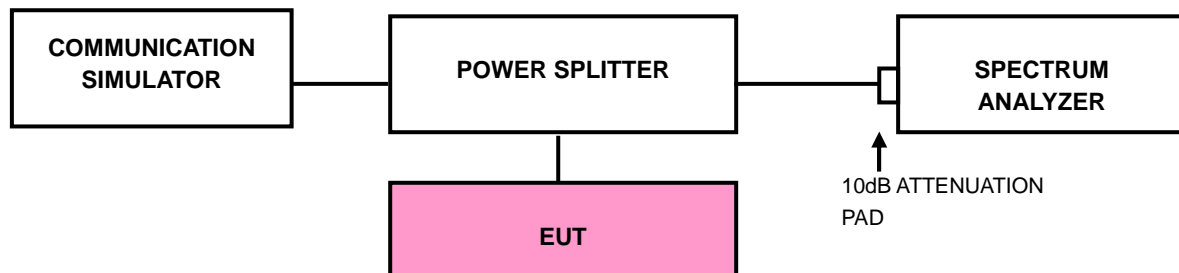




BUREAU VERITAS


Test Report No.: RF160816W001-5

### 4.6.4 TEST RESULTS

#### LTE BAND 4

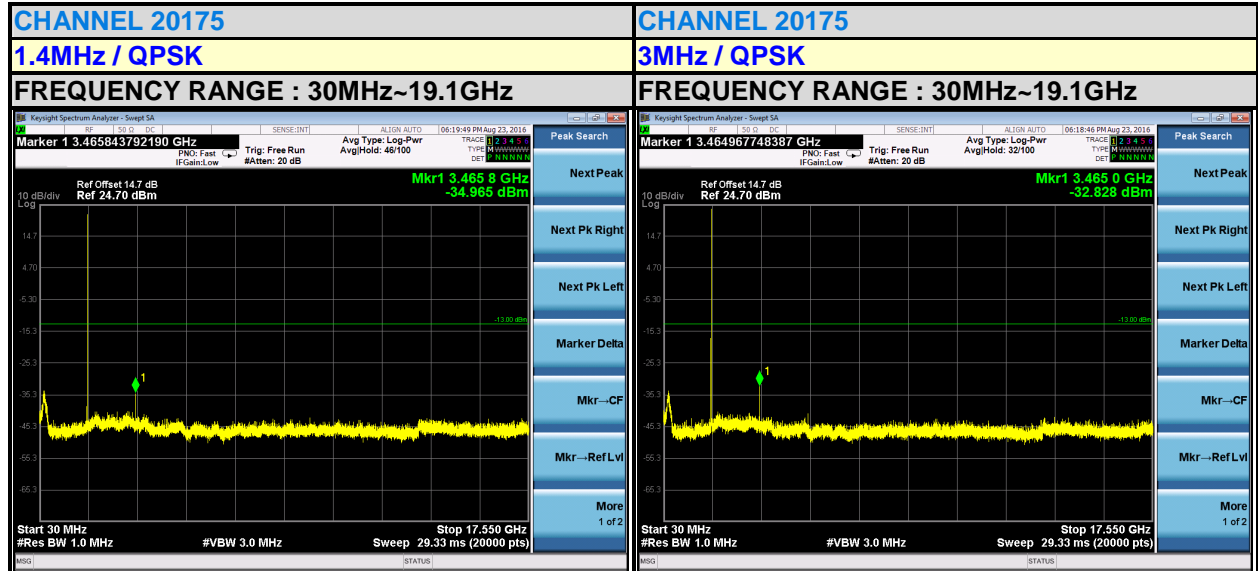

#### LTE BAND 4

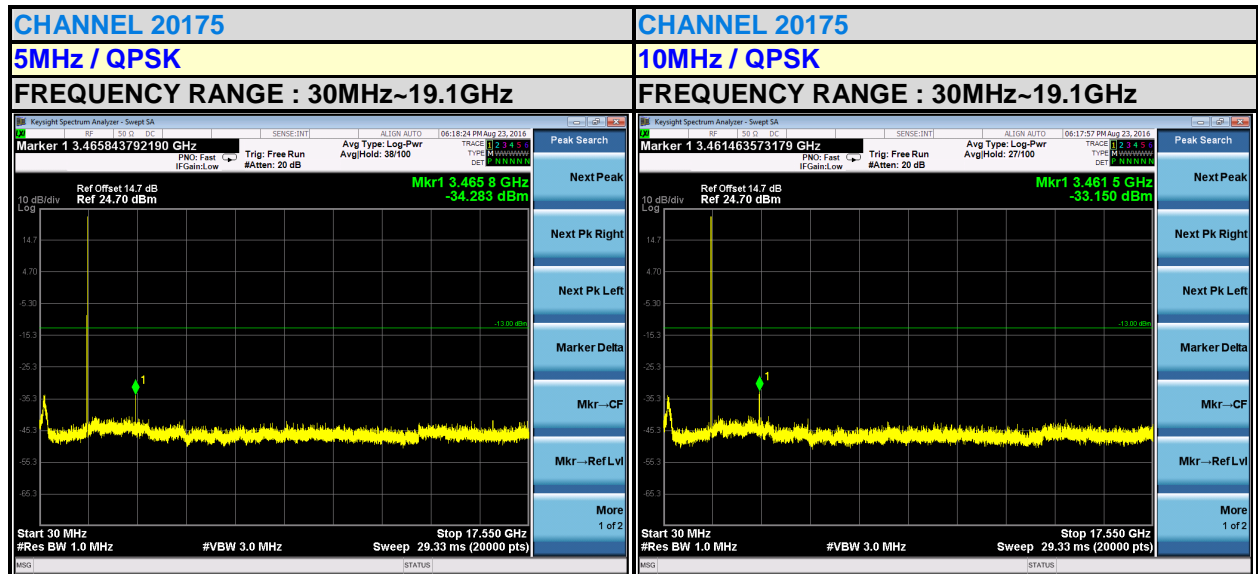

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,  
Houjie Town, Dongguan City,  
Guangdong 523942, China


Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)




BUREAU VERITAS

Test Report No.: RF160816W001-5

LTE BAND 4

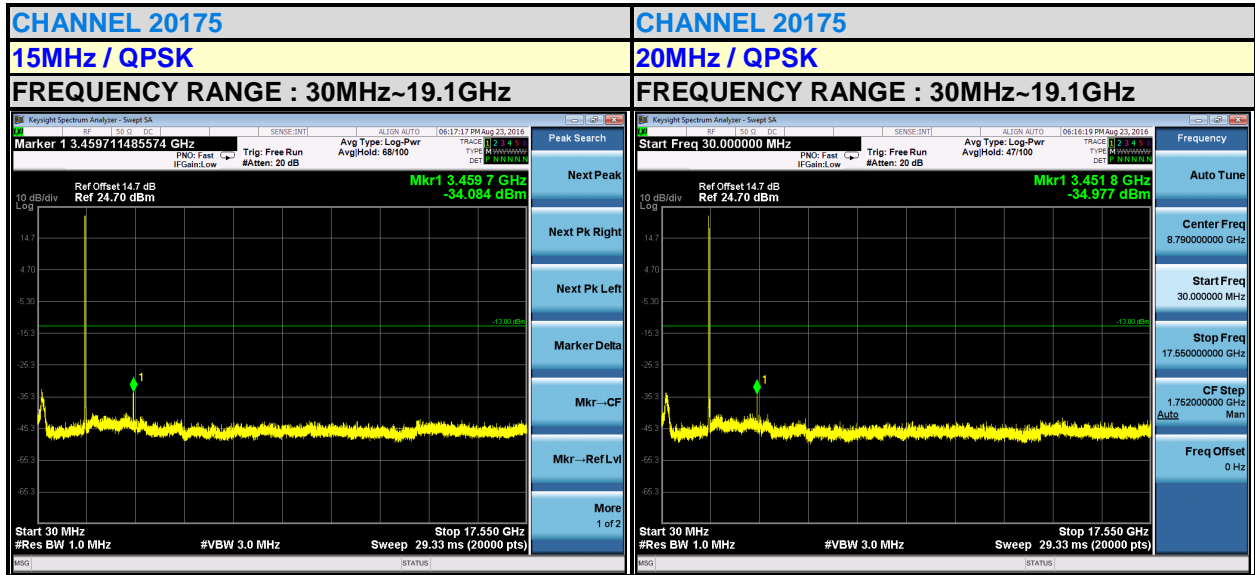

LTE BAND 17

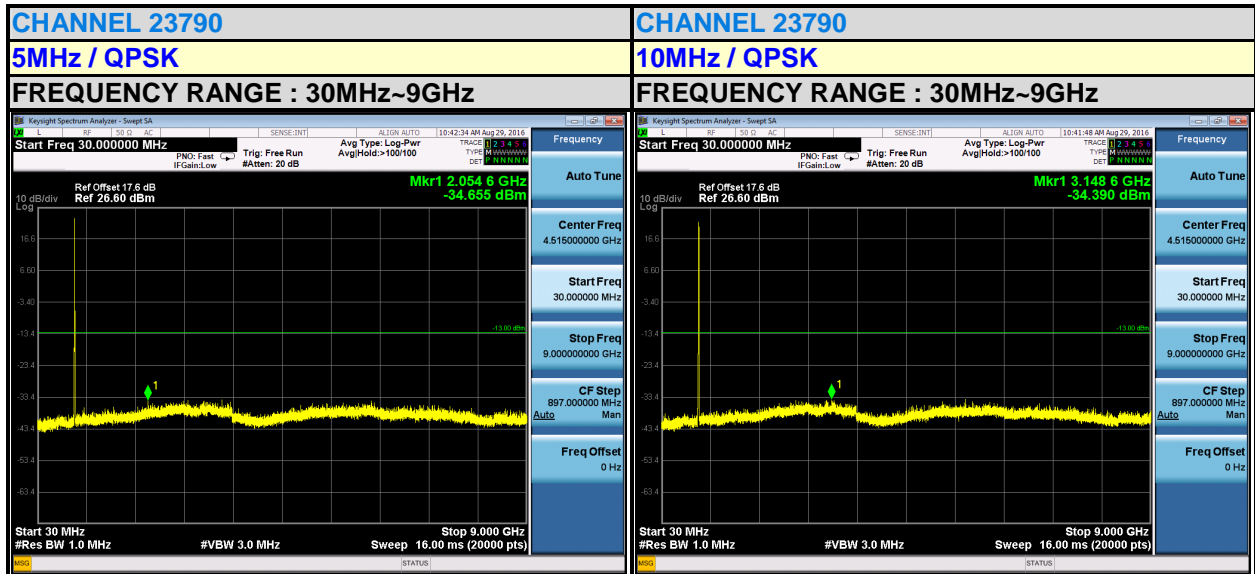



## 4.7 RADIATED EMISSION MEASUREMENT

### 4.7.1 LIMITS OF RADIATED EMISSION MEASUREMENT

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log_{10}(P)$  dB. The limit of emission equal to  $-13\text{dBm}$

### 4.7.2 TEST PROCEDURES


- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step a. Record the power level of S.G
- c.  $\text{EIRP} = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$ .
- d. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole,  $\text{E.R.P power} = \text{E.I.P.R power} - 2.15\text{dBi}$ .

**NOTE:** The resolution bandwidth of spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz.

### 4.7.3 DEVIATION FROM TEST STANDARD

No deviation

#### 4.7.4 TEST SETUP

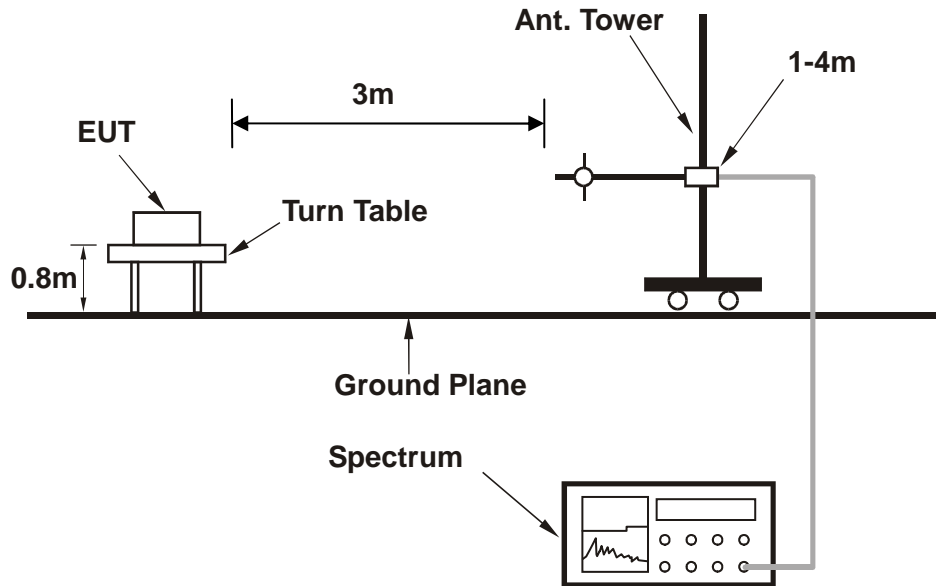

For the actual test configuration, please refer to the attached file (Test Setup Photo).






### 4.7.5 TEST RESULTS

#### BELOW 1GHz WORST-CASE DATA

##### LTE Band 4:

<b>MODE</b>	TX channel 20175	<b>FREQUENCY RANGE</b>	Below 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	26deg. C, 56%RH	<b>INPUT POWER</b>	DC 5V from adapter
<b>TESTED BY</b>	Alex Chen		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	30.970	-27.35	-45.36	-13.00	-14.35	18.01	Peak	Horizontal
2	47.460	-33.83	-39.27	-13.00	-20.83	5.44	Peak	Horizontal
3	80.440	-48.65	-40.95	-13.00	-35.65	-7.70	Peak	Horizontal
4	207.510	-53.27	-36.18	-13.00	-40.27	-17.09	Peak	Horizontal
5	277.350	-58.85	-43.92	-13.00	-45.85	-14.93	Peak	Horizontal
6	335.550	-57.80	-45.18	-13.00	-44.80	-12.62	Peak	Horizontal

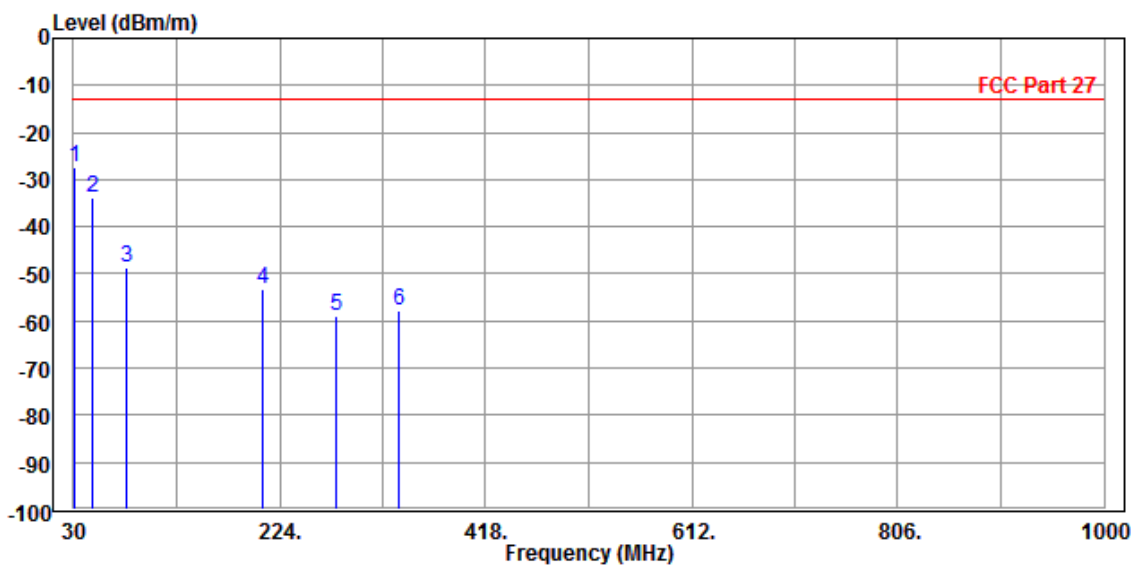




Test Report No.: RF160816W001-5

<b>MODE</b>	TX channel 20175	<b>FREQUENCY RANGE</b>	Below 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	26deg. C, 56%RH	<b>INPUT POWER</b>	DC 5V from adapter
<b>TESTED BY</b>	Alex Chen		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase	
	MHz	dBm/m	dBm	dBm/m	dB	dB/m			
1	PP	30.970	-31.96	-36.00	-13.00	-18.96	4.04	Peak	Vertical
2		47.460	-33.75	-29.81	-13.00	-20.75	-3.94	Peak	Vertical
3		101.780	-49.23	-38.32	-13.00	-36.23	-10.91	Peak	Vertical
4		208.480	-55.75	-44.96	-13.00	-42.75	-10.79	Peak	Vertical
5		281.230	-60.51	-49.13	-13.00	-47.51	-11.38	Peak	Vertical
6		336.520	-62.22	-51.06	-13.00	-49.22	-11.16	Peak	Vertical

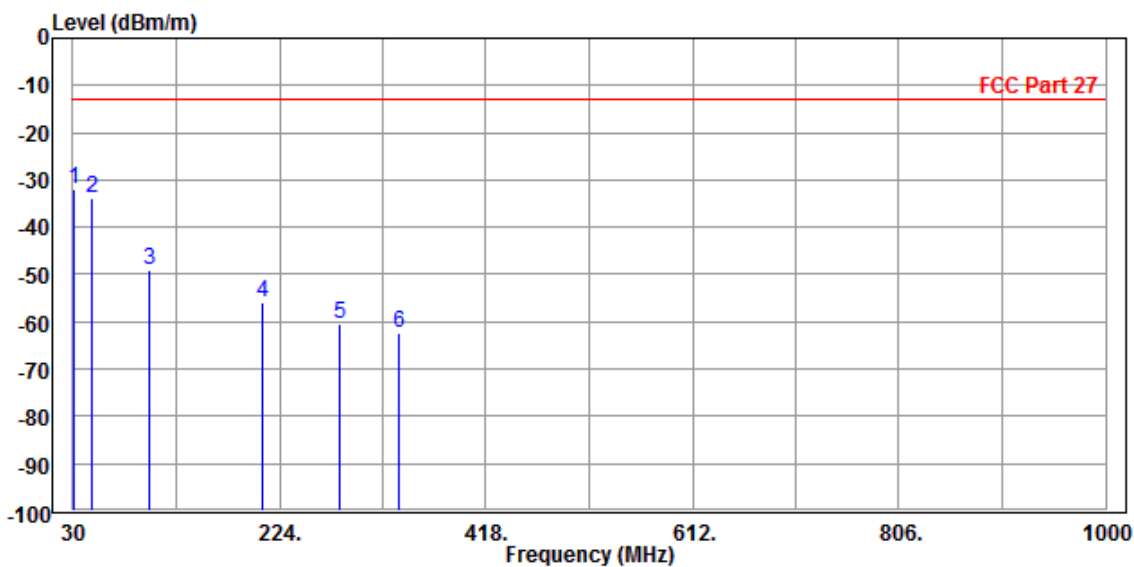



**BUREAU  
VERITAS**

Test Report No.: RF160816W001-5


ABOVE 1GHz

LTE BAND 4

CHANNEL BANDWIDTH: 1.4MHz / QPSK

<b>MODE</b>	TX channel 20175	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	26deg. C, 56%RH	<b>INPUT POWER</b>	DC 5V from adapter
<b>TESTED BY</b>	Alex Chen		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3465.000	-54.57	-56.60	-13.00	-41.57	2.03	Peak	Horizontal
2 PP	5197.500	-48.38	-56.99	-13.00	-35.38	8.61	Peak	Horizontal

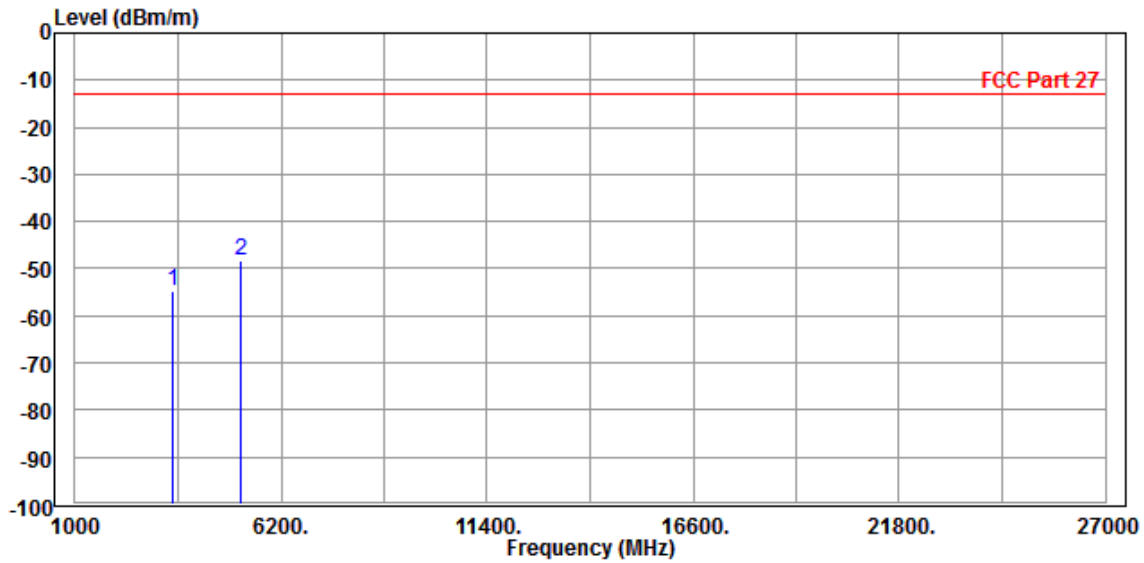




Test Report No.: RF160816W001-5

<b>MODE</b>	TX channel 20175	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	26deg. C, 56%RH	<b>INPUT POWER</b>	DC 5V from adapter
<b>TESTED BY</b>	Alex Chen		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3465.000	-54.25	-56.78	-13.00	-41.25	2.53	Peak	Vertical
2 PP	5197.500	-49.49	-57.47	-13.00	-36.49	7.98	Peak	Vertical

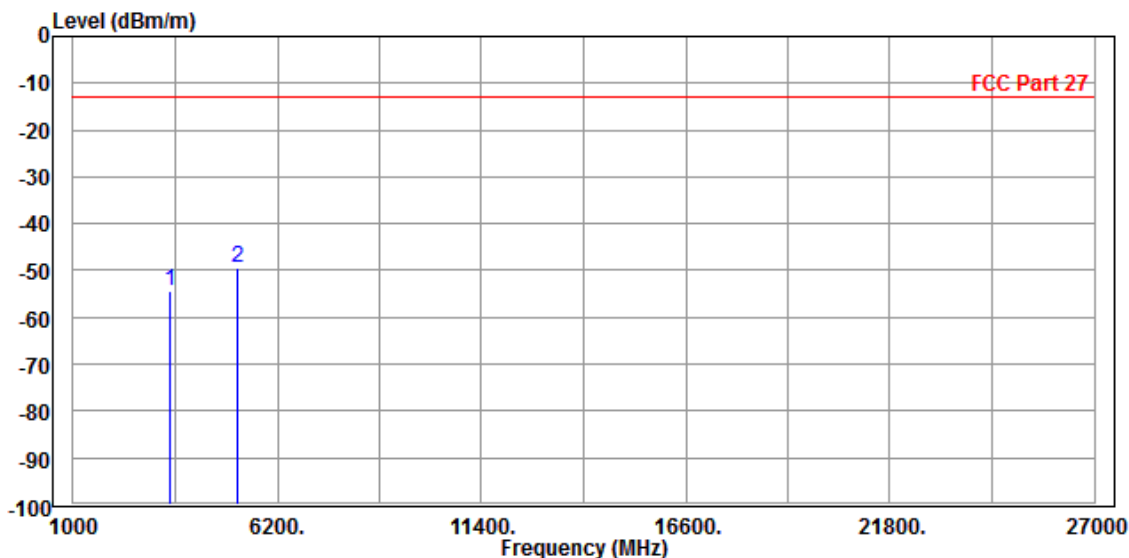




BUREAU VERITAS

Test Report No.: RF160816W001-5

CHANNEL BANDWIDTH: 3MHz / QPSK

MODE	TX channel 20175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	26deg. C, 56%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Alex Chen		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3465.000	-54.50	-56.53	-13.00	-41.50	2.03	Peak	Horizontal
2 PP	5197.500	-47.50	-56.11	-13.00	-34.50	8.61	Peak	Horizontal

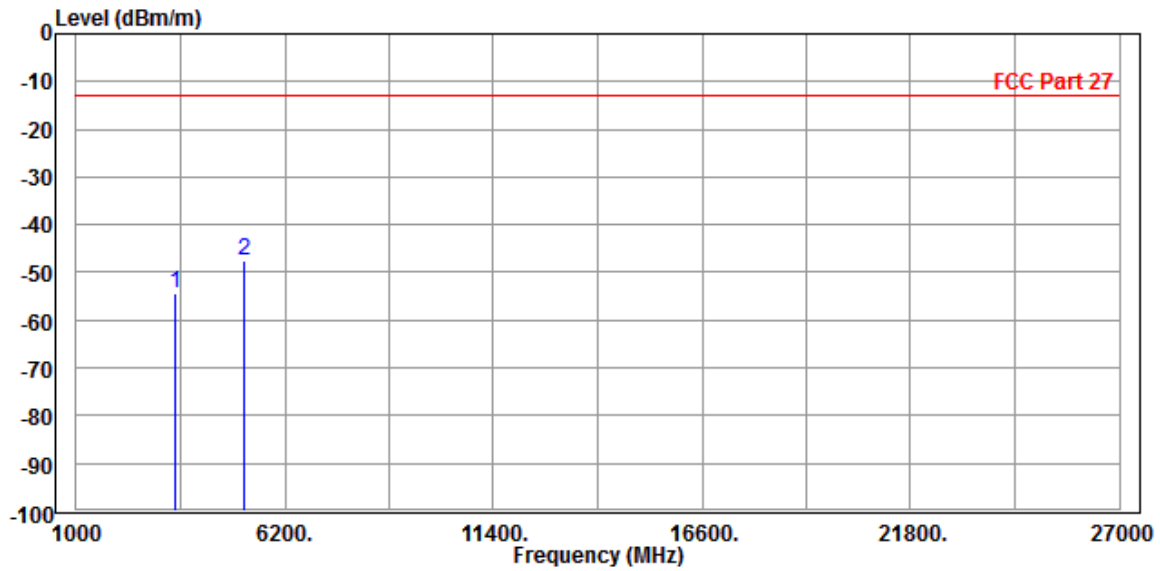




Test Report No.: RF160816W001-5

<b>MODE</b>	TX channel 20175	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	26deg. C, 56%RH	<b>INPUT POWER</b>	DC 5V from adapter
<b>TESTED BY</b>	Alex Chen		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3465.000	-54.50	-57.03	-13.00	-41.50	2.53	Peak	Vertical
2 PP	5197.500	-49.12	-57.10	-13.00	-36.12	7.98	Peak	Vertical

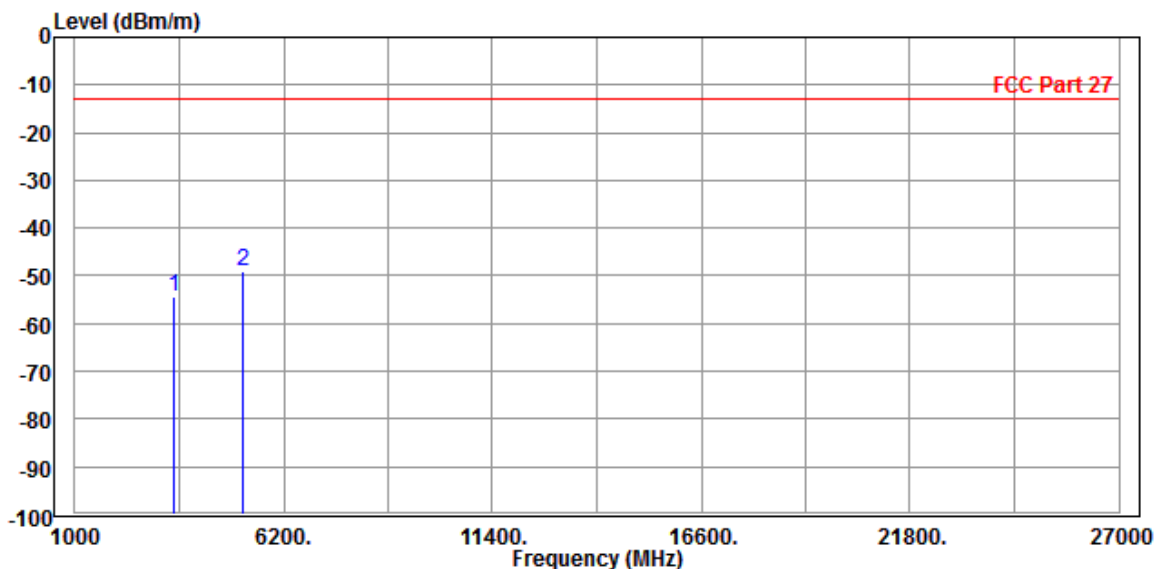




BUREAU  
VERITAS

Test Report No.: RF160816W001-5

CHANNEL BANDWIDTH: 5MHz / QPSK

MODE	TX channel 20175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	26deg. C, 56%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Alex Chen		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3465.000	-54.61	-56.64	-13.00	-41.61	2.03	Peak	Horizontal
2	5197.500	-48.83	-57.44	-13.00	-35.83	8.61	Peak	Horizontal
3	PP10412.000	-32.23	-50.78	-13.00	-19.23	18.55	Peak	Horizontal

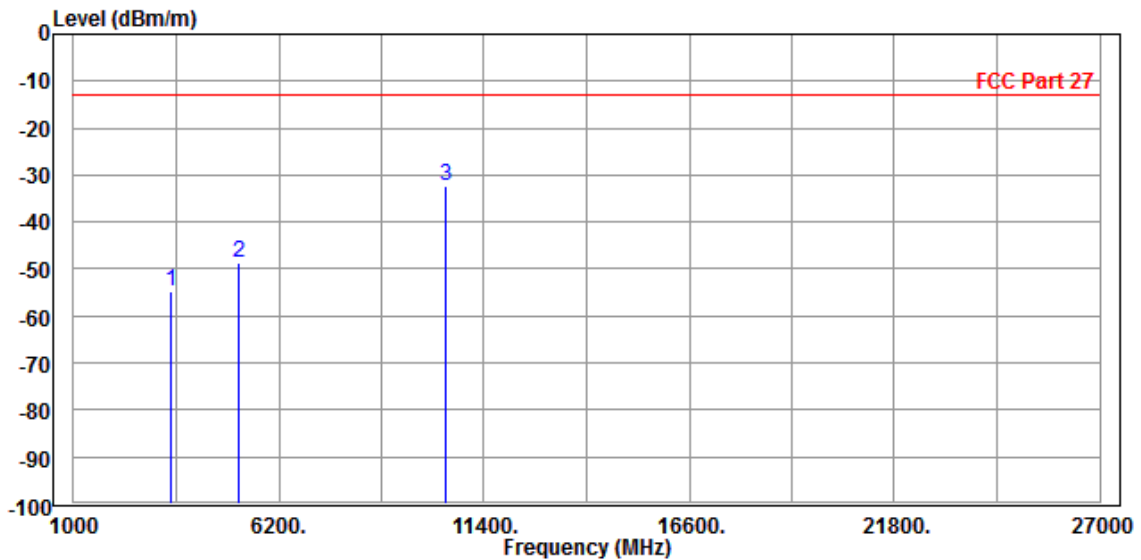




Test Report No.: RF160816W001-5

<b>MODE</b>	TX channel 20175	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	26deg. C, 56%RH	<b>INPUT POWER</b>	DC 5V from adapter
<b>TESTED BY</b>	Alex Chen		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3465.000	-54.18	-56.71	-13.00	-41.18	2.53	Peak	Vertical
2	5197.500	-49.32	-57.30	-13.00	-36.32	7.98	Peak	Vertical
3	PP10412.000	-36.05	-53.75	-13.00	-23.05	17.70	Peak	Vertical

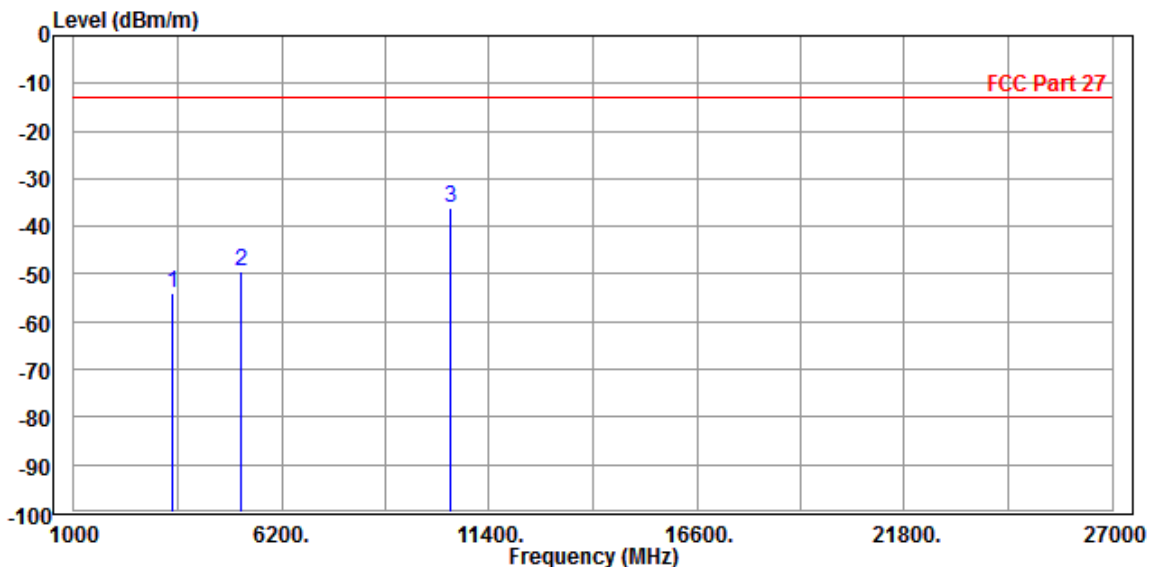






BUREAU VERITAS

Test Report No.: RF160816W001-5

CHANNEL BANDWIDTH: 10MHz / QPSK

MODE	TX channel 20175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	26deg. C, 56%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Alex Chen		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3465.000	-54.07	-56.10	-13.00	-41.07	2.03	Peak	Horizontal
2 PP	5197.500	-48.95	-57.56	-13.00	-35.95	8.61	Peak	Horizontal

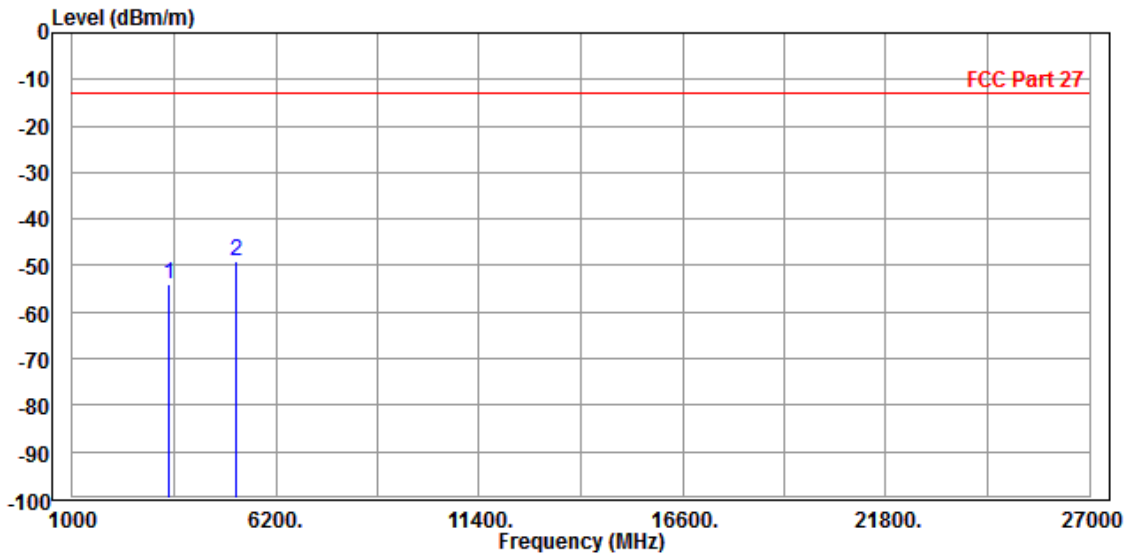




Test Report No.: RF160816W001-5

<b>MODE</b>	TX channel 20175	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	26deg. C, 56%RH	<b>INPUT POWER</b>	DC 5V from adapter
<b>TESTED BY</b>	Alex Chen		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3465.000	-55.17	-57.70	-13.00	-42.17	2.53	Peak	Vertical
2 PP	5197.500	-49.40	-57.38	-13.00	-36.40	7.98	Peak	Vertical

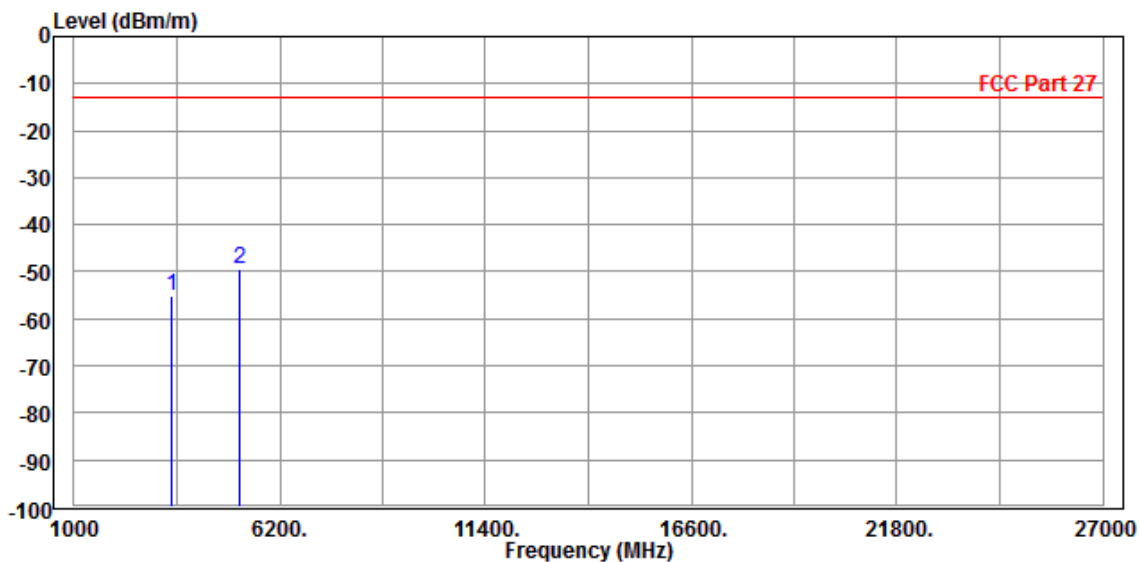




BUREAU VERITAS

Test Report No.: RF160816W001-5

CHANNEL BANDWIDTH: 15MHz / QPSK

MODE	TX channel 20175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	26deg. C, 56%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Alex Chen		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3465.000	-55.13	-57.16	-13.00	-42.13	2.03	Peak	Horizontal
2	5197.500	-48.81	-57.42	-13.00	-35.81	8.61	Peak	Horizontal
3	PP10412.000	-34.77	-53.32	-13.00	-21.77	18.55	Peak	Horizontal

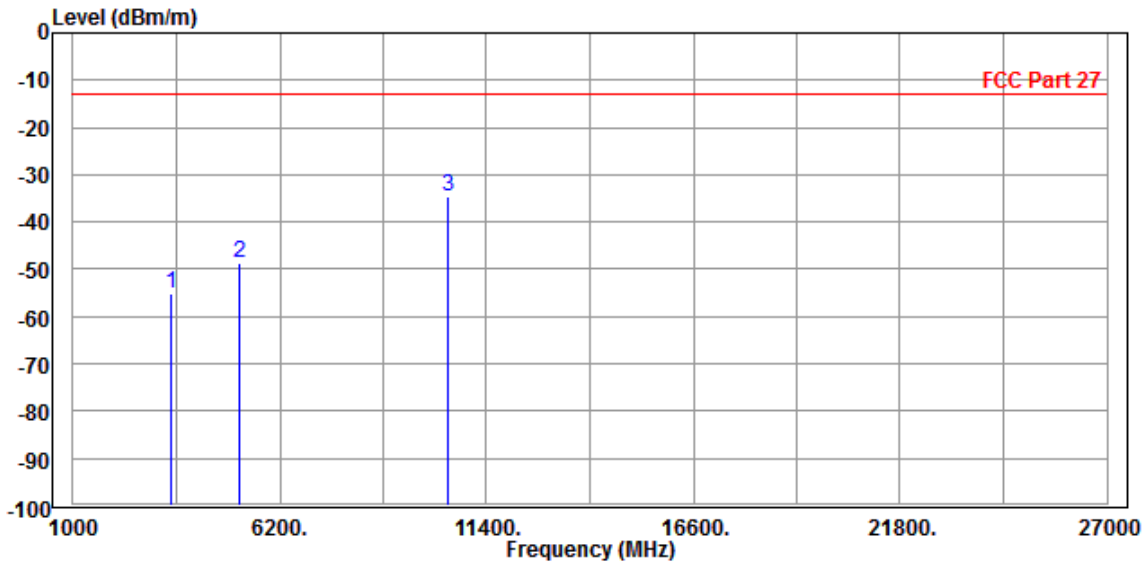




Test Report No.: RF160816W001-5

<b>MODE</b>	TX channel 20175	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	26deg. C, 56%RH	<b>INPUT POWER</b>	DC 5V from adapter
<b>TESTED BY</b>	Alex Chen		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3465.000	-54.16	-56.69	-13.00	-41.16	2.53	Peak	Vertical
2	5197.500	-49.34	-57.32	-13.00	-36.34	7.98	Peak	Vertical
3	PP10412.000	-33.67	-51.37	-13.00	-20.67	17.70	Peak	Vertical

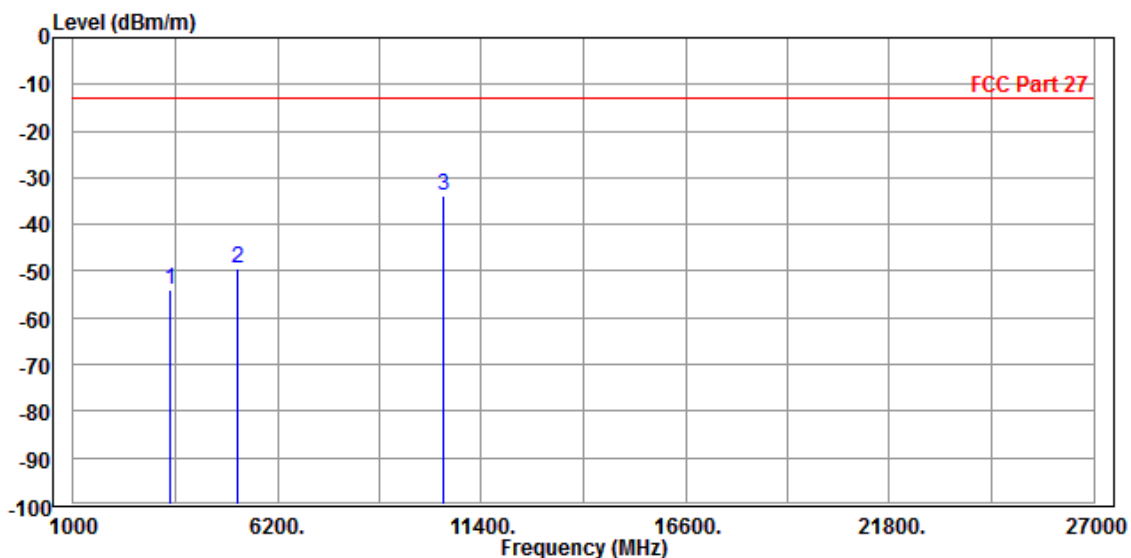




**BUREAU  
VERITAS**

Test Report No.: RF160816W001-5

**CHANNEL BANDWIDTH: 20MHz / QPSK**

<b>MODE</b>	TX channel 20175	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	26deg. C, 56%RH	<b>INPUT POWER</b>	DC 5V from adapter
<b>TESTED BY</b>	Alex Chen		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3465.000	-53.80	-55.83	-13.00	-40.80	2.03	Peak	Horizontal
2 PP	5197.500	-48.05	-56.66	-13.00	-35.05	8.61	Peak	Horizontal

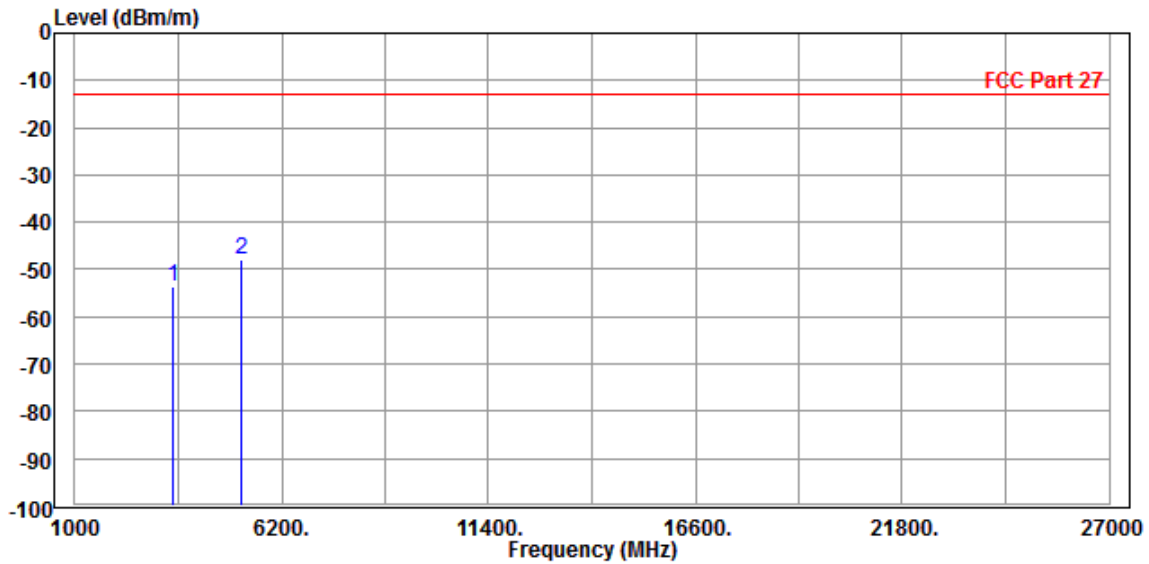




Test Report No.: RF160816W001-5

<b>MODE</b>	TX channel 20175	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	26deg. C, 56%RH	<b>INPUT POWER</b>	DC 5V from adapter
<b>TESTED BY</b>	Alex Chen		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3465.000	-53.70	-56.23	-13.00	-40.70	2.53	Peak	Vertical
2	5197.500	-49.16	-57.14	-13.00	-36.16	7.98	Peak	Vertical
3	PP10412.000	-35.22	-52.92	-13.00	-22.22	17.70	Peak	Vertical

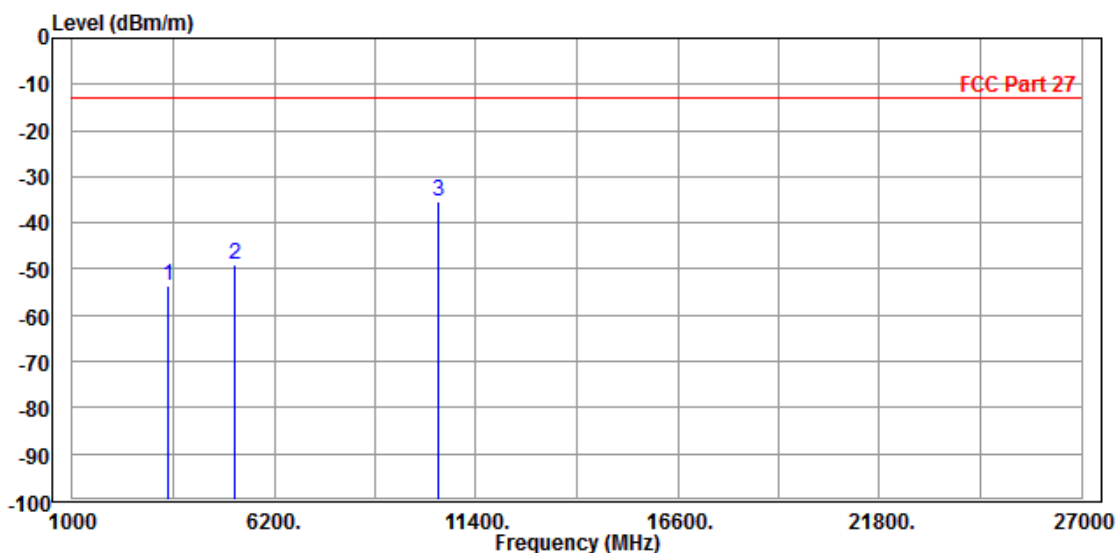



BUREAU VERITAS


Test Report No.: RF160816W001-5

LTE Band 17

CHANNEL BANDWIDTH: 5MHz / QPSK

MODE	TX channel 23790	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	26deg. C, 56%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Alex Chen		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1416.000	-53.37	-46.65	-13.00	-40.37	-6.72	Peak	Horizontal
2	PP 2130.000	-49.56	-47.63	-13.00	-36.56	-1.93	Peak	Horizontal

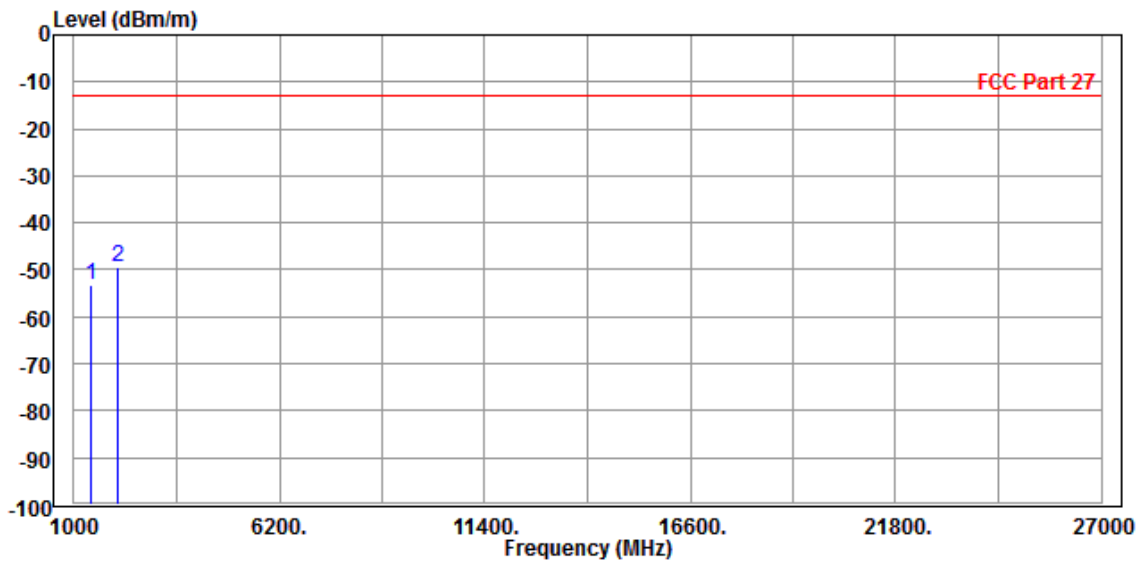




Test Report No.: RF160816W001-5

<b>MODE</b>	TX channel 23790	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	26deg. C, 56%RH	<b>INPUT POWER</b>	DC 5V from adapter
<b>TESTED BY</b>	Alex Chen		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1416.000	-50.53	-45.09	-13.00	-37.53	-5.44	Peak	Vertical
2 PP	2130.000	-49.95	-49.71	-13.00	-36.95	-0.24	Peak	Vertical

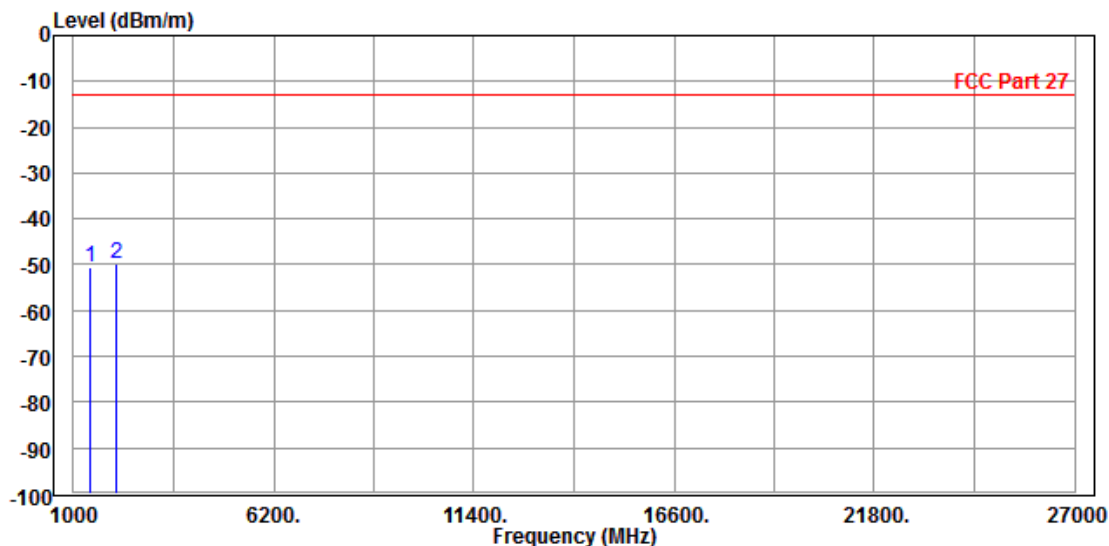






**BUREAU  
VERITAS**

Test Report No.: RF160816W001-5

**CHANNEL BANDWIDTH: 10MHz / QPSK**

<b>MODE</b>	TX channel 23790	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	26deg. C, 56%RH	<b>INPUT POWER</b>	DC 5V from adapter
<b>TESTED BY</b>	Alex Chen		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1416.000	-48.14	-41.42	-13.00	-35.14	-6.72	Peak	Horizontal
2 PP	2130.000	-42.81	-40.88	-13.00	-29.81	-1.93	Peak	Horizontal

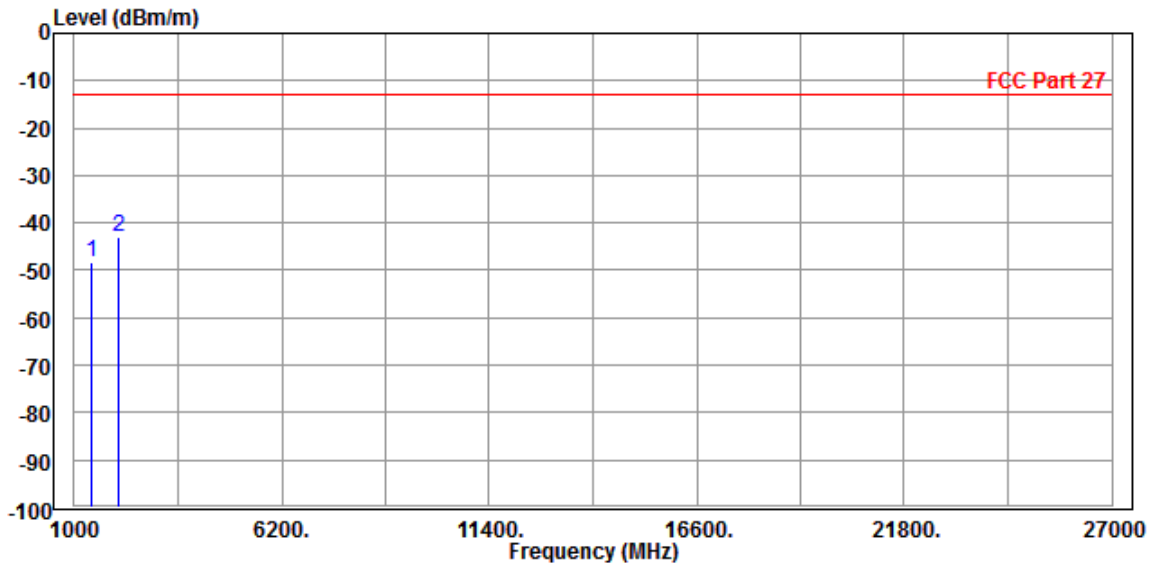




Test Report No.: RF160816W001-5

<b>MODE</b>	TX channel 23790	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	26deg. C, 56%RH	<b>INPUT POWER</b>	DC 5V from adapter
<b>TESTED BY</b>	Alex Chen		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1416.000	-53.43	-47.99	-13.00	-40.43	-5.44	Peak	Vertical
2 PP	2130.000	-49.82	-49.58	-13.00	-36.82	-0.24	Peak	Vertical

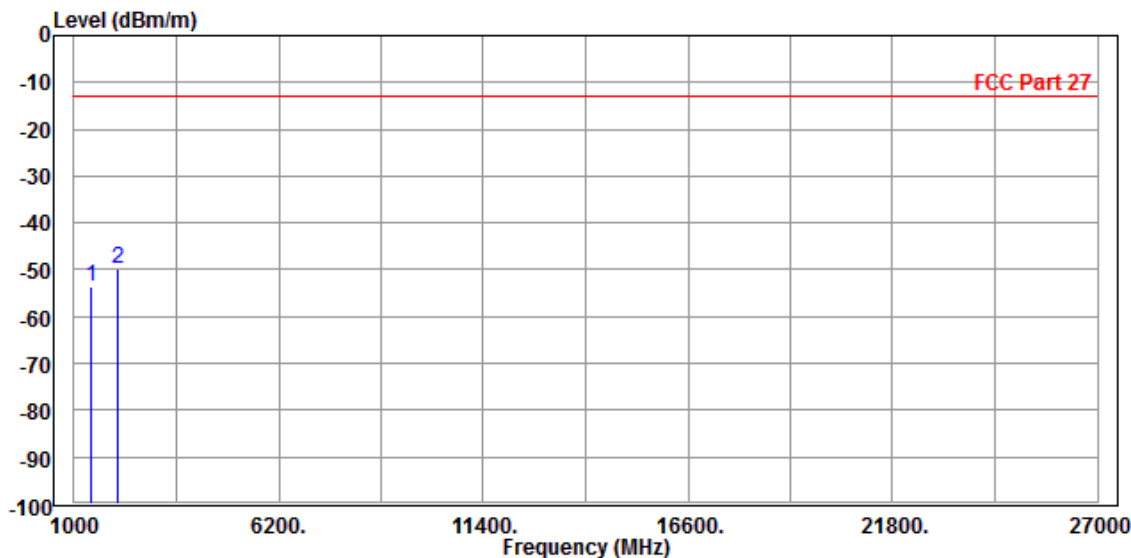



**BUREAU  
VERITAS**

Test Report No.: RF160816W001-5

## 5 INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Shenzhen Co., Ltd. Dongguan Branch, were founded in 2002 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Dongguan EMC/RF Lab:**

Tel: +86-769-85935656

Fax: +86-769-85931080

**Email:** [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)

**Web Site:** [www.adt.com.tw](http://www.adt.com.tw)

The address and road map of all our labs can be found in our web site also.



Test Report No.: RF160816W001-5

## 6 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No modifications were made to the EUT by the lab during the test.

---END---